
GORDIAN®

Job Order Contract Construction Task Catalog®

CSI Divisions 01-31 2026

Port of Stockton

Electrical

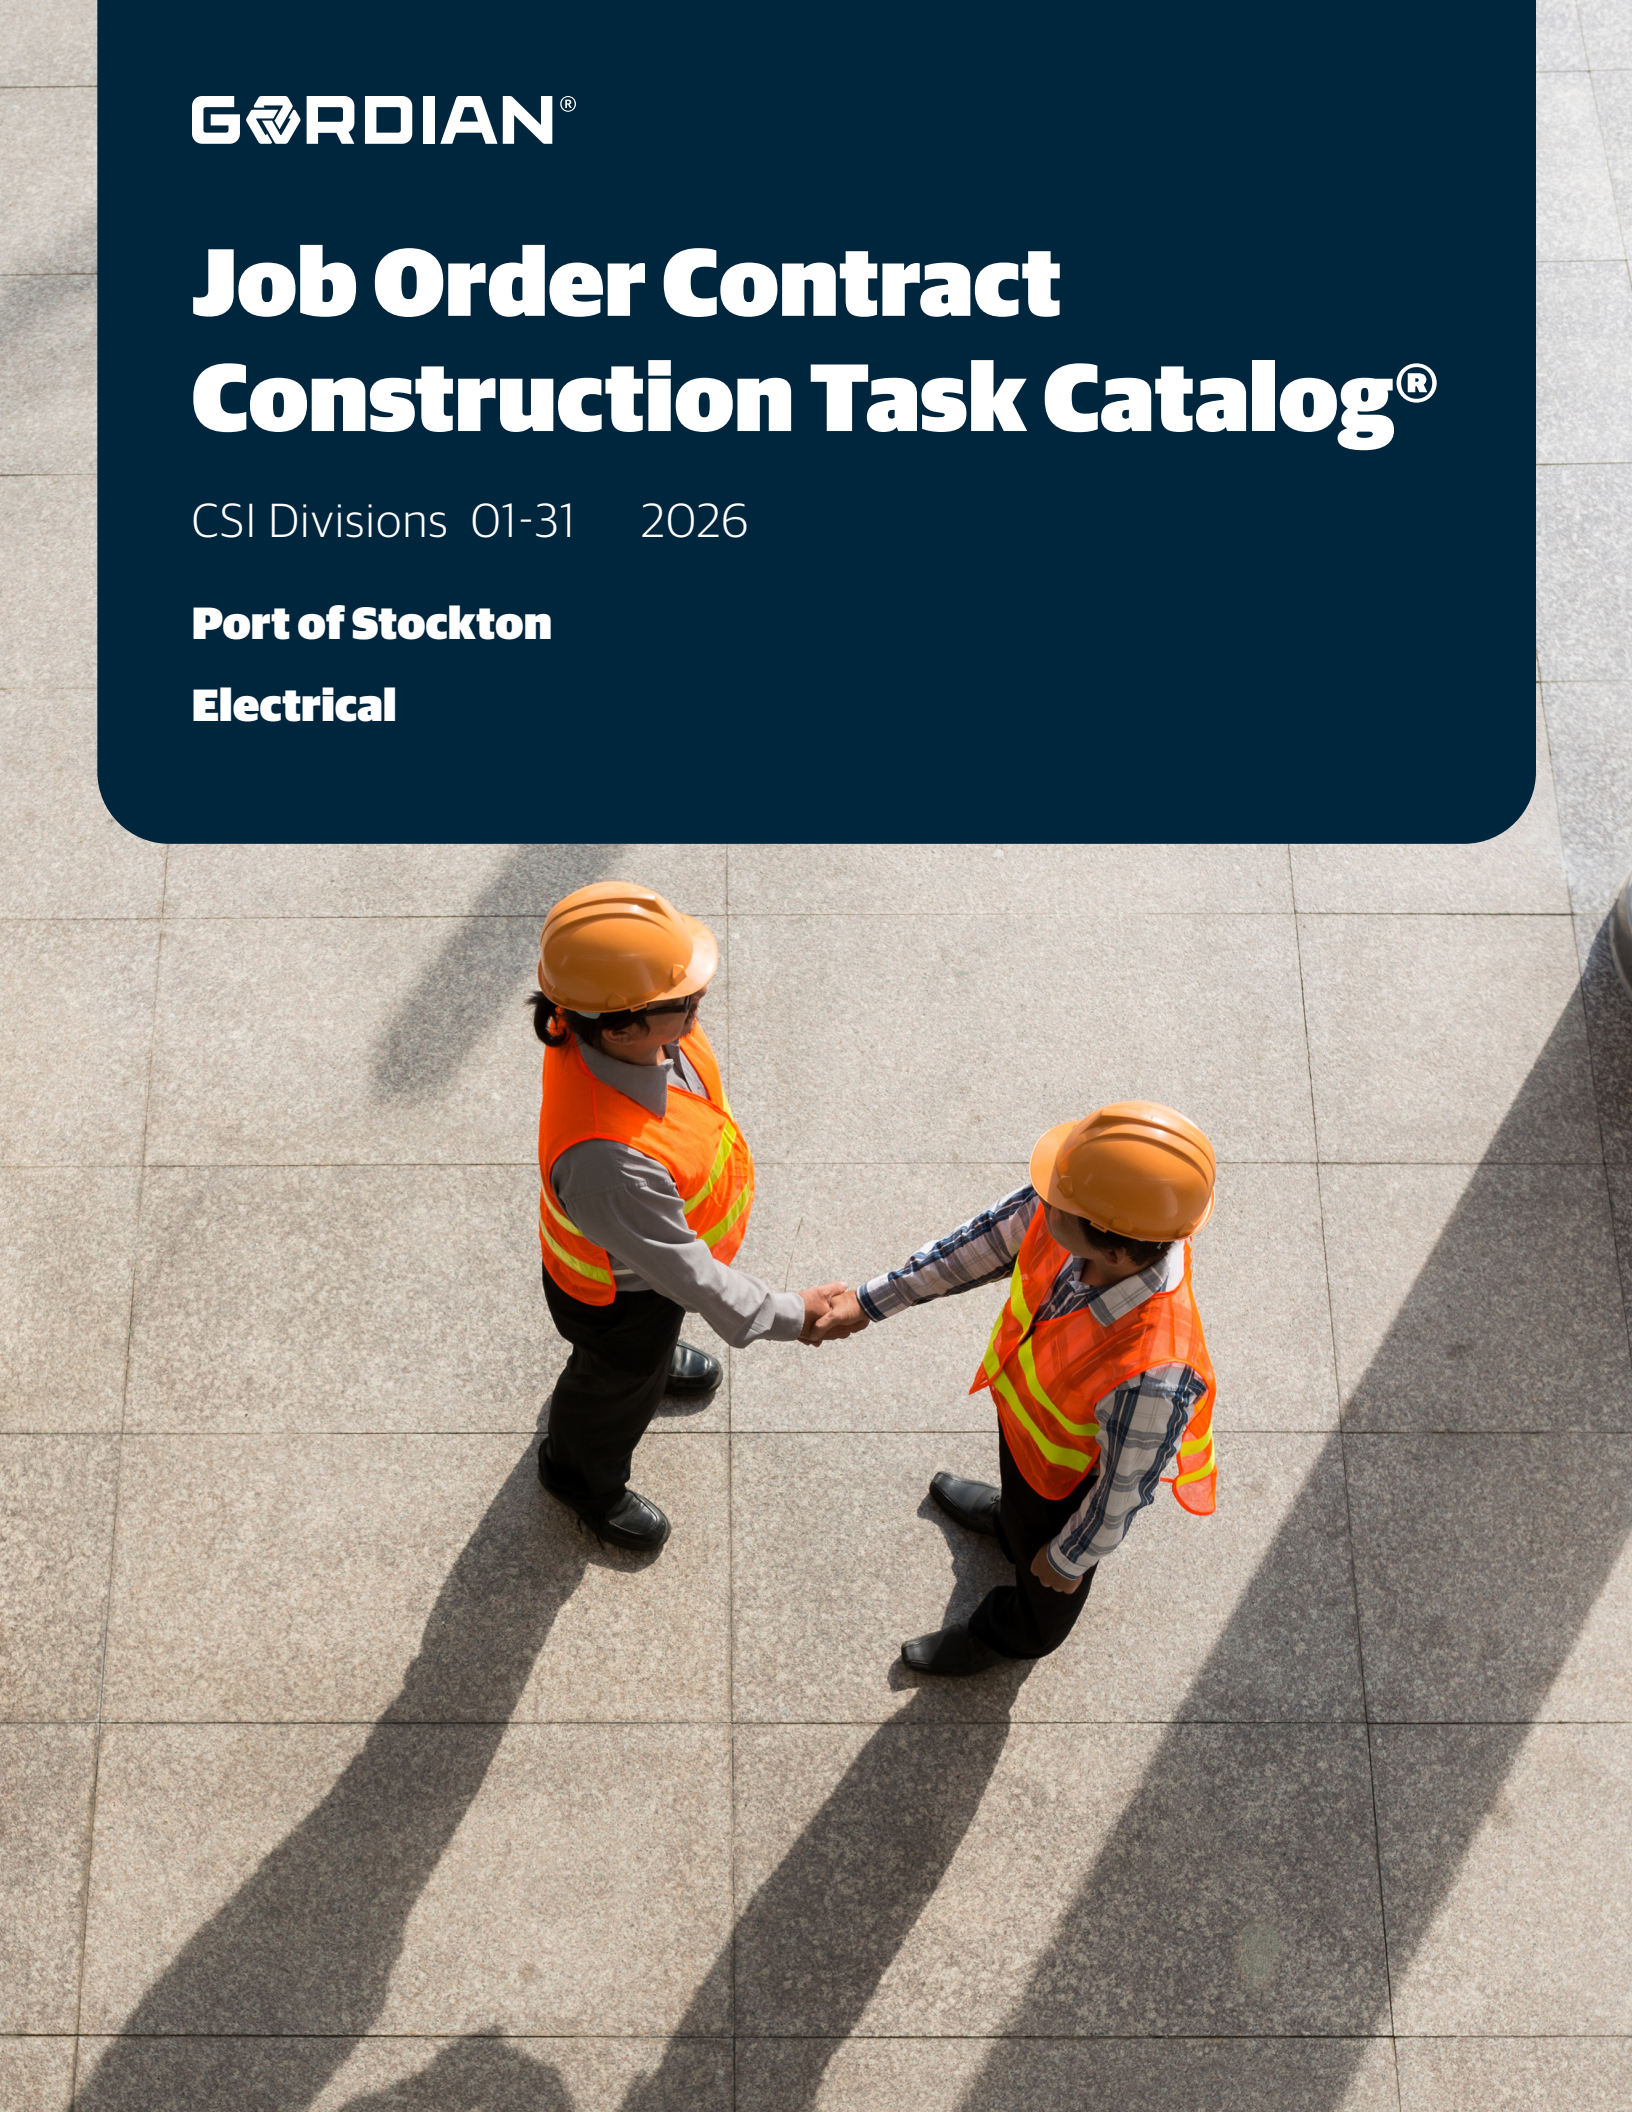

This Page Intentionally Left Blank

THE GORDIAN GROUP®

Table of Contents

00 Using The Construction Task Catalog® 1

01 General Requirements 1

01 10 Summary 1
01 11 Summary Of Work 1
01 20 Price and Payment Procedures 1
01 22 Unit Prices 1
01 30 Administrative Requirements 57
01 31 Project Management and Coordination 57
01 35 Special Procedures 58
01 40 Quality Requirements 58
01 41 Regulatory Requirements 58
01 42 References 58
01 45 Quality Control 58
01 50 Temporary Facilities and Controls 62
01 51 Temporary Utilities 62
01 52 Construction Facilities 62
01 53 Temporary Construction 64
01 54 Construction Aids 64
01 55 Vehicular Access and Parking 67
01 56 Temporary Barriers and Enclosures 73
01 57 Temporary Controls 84
01 58 Project Identification 85
01 60 Product Requirements 85
01 66 Product Storage and Handling Requirements 85
01 70 Execution and Closeout Requirements 87
01 71 Examination and Preparation 87
01 74 Cleaning and Waste Management 91
01 90 Life Cycle Activities 93
01 91 Commissioning 93

02 Existing Conditions 1

02 20 Assessment 1
02 25 Existing Material Assessment 1
02 30 Subsurface Investigation 1
02 32 Geotechnical Investigations 1
02 40 Demolition and Structure Moving 2
02 41 Demolition 2
02 60 Contaminated Site Material Removal 14
02 61 Removal and Disposal of Contaminated Soils 14
02 80 Facility Remediation 14
02 81 Transportation and Disposal of Hazardous Materials 14
02 82 Asbestos Remediation 15
02 83 Lead Remediation 24
02 84 Polychlorinated Biphenyl Remediation 29
02 87 Bio-Hazard Material Remediation 30
02 89 Hazmat Ancillary Tasks and Support 38
02 90 Disaster Recovery 38
02 90 50 Cleaning and Disaster Cleanup 39
02 90 55 Emergency Clean-up 43

05 Metals 1

05 01 Maintenance of Metals 1
05 01 50 Maintenance of Metal Fabrications 1
05 01 70 Maintenance of Decorative Metal 1
05 05 Common Work Results for Metals 1
05 05 19 Post-Installed Concrete Anchors 1
05 05 21 Fastening Methods for Metal 12
05 05 23 Metal Fastenings 14
05 10 Structural Metal Framing 78
05 12 Structural Steel Framing 78
05 13 Structural Stainless-Steel Framing 141
05 14 Structural Aluminum Framing 141

copyright © 2026 The Gordian Group, Inc.

Table of Contents

05 15 Wire Rope Assemblies 142
05 20 Metal Joists 148
05 21 Steel Joist Framing 148
05 30 Metal Decking 148
05 31 Steel Decking 148
05 36 Composite Metal Decking 152
05 40 Cold-Formed Metal Framing 155
05 41 Structural Metal Stud Framing 155
05 42 Cold-Formed Metal Joist Framing 157
05 43 Slotted Channel Framing 157
05 45 Metal Support Assemblies 159
05 70 Decorative Metal 159
05 71 Decorative Metal Stairs 159
05 73 Decorative Metal Railings 160
05 75 Decorative Formed Metal 161

06 Wood, Plastics, and Composites 1

06 01 Maintenance of Wood, Plastics, and Composites 1
06 01 20 Maintenance of Finish Carpentry 1
06 05 Common Work Results for Wood, Plastics, and Composites 1
06 05 23 Wood, Plastic, and Composite Fastenings 1
06 05 73 Wood Treatment 23
06 10 Rough Carpentry 24
06 11 Wood Framing 24
06 13 Heavy Timber Construction 29
06 15 Wood Decking 30
06 16 Sheathing 34

07 Thermal And Moisture Protection 1

07 60 Flashing and Sheet Metal 1
07 62 Sheet Metal Flashing and Trim 1
07 63 Sheet Metal Roofing Specialties 5
07 64 Sheet Metal Wall Cladding 7
07 65 Flexible Flashing 7
07 90 Joint Protection 7
07 91 Preformed Joint Seals 7
07 92 Joint Sealants 10
07 95 Expansion Control 14

09 Finishes 1

09 01 Maintenance of Finishes 1
09 01 20 Maintenance of Plaster and Gypsum Board 1
09 01 30 Maintenance of Tiling 1
09 01 50 Maintenance of Ceilings 1
09 01 60 Maintenance of Flooring 2
09 01 80 Maintenance of Acoustic Treatment 2
09 01 90 Maintenance of Painting and Coating 2
09 05 Common Work Results for Finishes 7
09 05 61 Common Work Results for Flooring Preparation 7
09 05 71 Acoustic Underlayment 7
09 20 Plaster and Gypsum Board 8
09 22 Supports for Plaster and Gypsum Board 8
09 23 Gypsum Plastering 17
09 24 Cement Plastering 18
09 28 Backing Boards and Underlayments 20
09 29 Gypsum Board 20
09 50 Ceilings 28
09 51 Acoustical Ceilings 28
09 53 Acoustical Ceiling Suspension Assemblies 45
09 54 Specialty Ceilings 48
09 57 Special Function Ceilings 49
09 80 Acoustic Treatment 49
09 81 Acoustic Insulation 49
09 84 Acoustic Room Components 49
09 90 Painting and Coating 50
09 91 Painting 50

copyright © 2026 The Gordian Group, Inc.

09 93 Staining and Transparent Finishing 158
09 96 High-Performance Coatings 161
09 97 Special Coatings 163

13 Special Construction **1**

13 40 Integrated Construction 1
13 46 Lightning Protection Systems 1

26 Electrical **1**

26 01 Operation and Maintenance of Electrical Systems 1
26 01 10 Operation and Maintenance of Medium-Voltage Electrical Distribution 1
26 01 20 Operation and Maintenance of Low-Voltage Electrical Distribution 2
26 01 26 Maintenance Testing of Electrical Systems 2
26 01 30 Operation and Maintenance of Facility Electrical Power Generating and Storing Equipment 3
26 01 50 Operation and Maintenance of Lighting 3
26 05 Common Work Results for Electrical 33
26 05 13 Medium-Voltage Cables 33
26 05 19 Low-Voltage Electrical Power Conductors and Cables 40
26 05 23 Control-Voltage Electrical Power Cables 58
26 05 26 Grounding and Bonding for Electrical Systems 58
26 05 29 Hangers and Supports for Electrical Systems 63
26 05 33 Raceway and Boxes for Electrical Systems 85
26 05 36 Cable Trays for Electrical Systems 313
26 05 39 Underfloor Raceways for Electrical Systems 401
26 05 43 Underground Ducts and Raceways for Electrical Systems 403
26 05 46 Utility Poles for Electrical Systems 406
26 05 53 Identification for Electrical Systems 411
26 05 83 Wiring Connections 411
26 08 Commissioning of Electrical Systems 414
26 09 Instrumentation and Control for Electrical Systems 414
26 09 13 Electrical Power Monitoring 414
26 09 23 Lighting Control Devices 415
26 10 Medium-Voltage Electrical Distribution 437
26 11 Substations 437
26 12 Medium-Voltage Transformers 444
26 13 Medium-Voltage Switchgear 450
26 18 Medium-Voltage Circuit Protection Devices 453
26 19 High-Voltage Circuit Protection 453
26 20 Low-Voltage Electrical Distribution 456
26 21 Low-Voltage Electrical Service Entrance 456
26 22 Low-Voltage Transformers 457
26 24 Switchboards and Panelboards 463
26 25 Enclosed Bus Assemblies 508
26 27 Low-Voltage Distribution Equipment 512
26 28 Low-Voltage Circuit Protective Devices 530
26 29 Low-Voltage Controllers 560
26 30 Facility Electrical Power Generating and Storing Equipment 577
26 31 Photovoltaic Collectors 577
26 32 Packaged Generator Assemblies 581
26 33 Battery Equipment 593
26 35 Power Filters and Conditioners 595
26 36 Transfer Switches 596
26 40 Electrical And Cathodic Protection 601
26 43 Surge Protective Devices 601
26 50 Lighting 605
26 51 Interior Lighting 605
26 52 Safety Lighting 674
26 54 Classified Location Lighting 679
26 55 Special Purpose Lighting 690
26 56 Exterior Lighting 706

27 Communications **1**

27 05 Common Work Results for Communications 1
27 05 26 Grounding and Bonding for Communications Systems 1
27 05 29 Hangers and Supports for Communications Systems 1
27 05 33 Conduits and Back Boxes for Communications Systems 4

copyright © 2026 The Gordian Group, Inc.

Table of Contents

27 05 36 Cable Trays for Communications Systems 4
27 05 39 Surface Raceways for Communications Systems 4
27 05 43 Underground Ducts and Raceways for Communications Systems 4
27 05 46 Utility Poles for Communications Systems 4
27 05 53 Identification for Communications Systems 4
27 08 Commissioning of Communications 4
27 10 Structured Cabling 4
27 11 Communications Equipment Room Fittings 5
27 13 Communications Backbone Cabling 11
27 15 Communications Horizontal Cabling 13
27 16 Communications Connecting Cords, Devices, and Adapters 53
27 20 Data Communications 55
27 21 Data Communications Network Equipment 55
27 30 Voice Communications 59
27 32 Voice Communications Terminal Equipment 59
27 40 Audio-Video Communications 60
27 41 Audio-Video Systems 60
27 50 Distributed Communications and Monitoring Systems 61
27 51 Distributed Audio-Video Communications Systems 61
27 52 Healthcare Communications and Monitoring Systems 63
27 53 Distributed Systems 64

28 Electronic Safety and Security 1

28 05 Common Work Results for Electronic Safety and Security 1
28 05 26 Grounding and Bonding for Electronic Safety and Security 1
28 05 53 Identification for Electronic Safety and Security 1
28 08 Commissioning of Electronic Safety and Security 1
28 10 Access Control 1
28 15 Integrated Access Control Hardware Devices 1
28 16 Access Control Interfaces 1
28 18 Security Access Detection Equipment 7
28 20 Video Surveillance 7
28 21 Surveillance Cameras 8
28 40 Life Safety 27
28 41 Radiation Detection and Alarm 27
28 42 Gas Detection and Alarm 27
28 43 Fuel Oil Detection and Alarm 27
28 46 Fire Detection and Alarm 27
28 47 Mass Notification 78
28 49 Electronic Personal Protection Systems 82

31 Earthwork 1

31 01 Maintenance of Earthwork 1
31 01 20 Maintenance of Earth Moving 1
31 05 Common Work Results for Earthwork 1
31 05 13 Soils for Earthwork 1
31 05 16 Aggregates for Earthwork 2
31 05 36 Equipment Delivery, Pickup, Mobilization and Demobilization 5
31 20 Earth Moving 5
31 22 Grading 5
31 23 Excavation and Fill 5
31 25 Erosion and Sedimentation Controls 13

copyright © 2026 The Gordian Group, Inc.

About the CTC:

- ☑ This Construction Task Catalog® (CTC) was developed and customized by The Gordian Group, Inc. specifically for **Port of Stockton**, priced locally using current labor, material and equipment costs, and published in May 2026.
- ☑ The Gordian Group, Inc. licenses the use of this CTC and other proprietary information and software for the sole purpose of providing Job Order Contracting services to **Port of Stockton**. Use of this CTC and other proprietary information and software for any other purpose, or for any other entity, is expressly prohibited without the express written consent of The Gordian Group, Inc.

MasterFormat™

- ☑ The Tasks in this CTC are organized using CSI's *MasterFormat*.

CSI Building Knowledge Improving Project Delivery

MasterFormat® is produced jointly by CSI and Construction Specifications Canada (CSC). U.S. copyright is held by CSI and Canadian copyright by CSC. All Rights Reserved. For license information, contact CSI at csi@csinet.org. For more information on *MasterFormat* visit www.MasterFormat.com

The Unit Prices Include:

Labor Costs:

- ☑ Labor costs include direct labor through the working foreperson level at straight-time prevailing wage rates including fringe benefits and an allowance for Social Security, Medicare taxes, worker's compensation, unemployment insurance, and employee benefits.
- ☑ Labor costs include unloading equipment, materials, and tools, and transporting the same up or down 2 stories and 125' to reach the project site; layout; measuring and cutting to fit; performing the Task; disposal of excess material; and time for lunch and breaks.

Equipment Costs:

- ☑ Equipment costs include all equipment required to accomplish the Task.
- ☑ Mobilization is included for all equipment except large equipment (e.g. cranes, bulldozers, excavators, backhoes, bobcats etc.), which exclude mobilization.
- ☑ Equipment costs include all operating expenses such as fuel, electricity, lubricants, etc.

Material Costs:

- ☑ Material costs include the cost of the material, delivery, and all incidentals and accessories integral to the installation.
- ☑ Material costs include manufacturer's and/or fabricator's shop drawings.
- ☑ Material costs for roofing, drywall, VCT, carpet, wall covering, ceiling tile, pipe, conduit, concrete, etc. include an allowance for waste. This list is not intended to be all inclusive, but descriptive of the types of construction materials that are typically sold in standard lengths, sizes and weights.
- ☑ Material costs for imported materials (e.g. aggregate, sand, soil, etc.) include delivery up to 15 miles from the closest approved source.

The Adjustment Factors Include:

The Adjustment Factors include the following costs, unless specifically excluded by the terms of the Contract Documents:

Business Costs:

- ☑ Office overhead, including, but not limited to, office space, office equipment, office and management personnel, office supplies, and employee transportation.
- ☑ Insurance and bonding.
- ☑ Profit.

copyright © 2026 The Gordian Group, Inc.

- ☑ Job Order development services, Owner meetings, and other administrative services required by the Contract Documents.
- ☑ Subcontractor's overhead and profit.
- ☑ Cost of financing the work.
- ☑ Business risks such as the risk of a lower than expected volume of work, smaller than anticipated Job Orders, poor Subcontractor performance, and inflation or material cost fluctuations.

Project Related Costs:

- ☑ Project trailer, equipment and supplies, portable toilets, and hand wash stations for Contractor's use.
- ☑ Project management and project supervision.
- ☑ Services required to complete project filings and obtain permits.
- ☑ Preparation and modification of sketches, drawings, submittals, as-built drawings, project photographs and other project records.
- ☑ Incidental engineering and architectural services.
- ☑ Gang boxes and storage containers for Contractor's tools, equipment and materials.
- ☑ Basic safety and warning signage, minor barricades (e.g., construction tape, etc.) and personnel safety equipment (e.g., hard hats, safety harnesses with lifeline or cabling, protective clothing, safety glasses, face shields, etc.).
- ☑ Meeting Owner's security requirements.
- ☑ All taxes for which a waiver is not available including material sales tax and equipment rental.
- ☑ Removing and returning Owner's furniture and furnishings (e.g. chairs, tables, pictures, etc. but excluding modular furniture, furnishings fastened to the wall or floor, safes and other furniture requiring disassembly).
- ☑ Sealing windows, doors and other openings with plastic to contain construction dust and debris within the work area, or to protect existing surfaces.
- ☑ Working in extreme temperatures (below or above normal) or adverse conditions such as rain, wind, sleet or snow.
- ☑ Costs resulting from inadequate supply of building materials, fuel, electricity, or skilled labor.
- ☑ Daily clean-up.
- ☑ Final professional clean-up.

Price Variations:

- ☑ Contractors may experience direct costs that are different than the unit prices set forth in the CTC. While diligent effort was made to provide accurate, unit prices, it is the Contractor's responsibility to review and analyze the unit prices, and to calculate, prior to bidding, the Adjustment Factors accordingly.
- ☑ Contractors may experience differences in decimal rounding on unit prices that may vary from unit prices set forth in the CTC.

Summary:

- ☑ This list is not exhaustive and is intended to provide general examples of costs to be included in the Contractor's Adjustment Factors.
- ☑ The only compensation to be paid to the Contractor for Tasks will be:

Unit Price	X	Quantity	X	Adjustment Factor

- ☑ No additional payments of any kind whatsoever will be made.
- ☑ All costs in excess of the unit prices, must be included in the Adjustment Factors.

General Rules:

- ☑ Unit prices are for complete and in-place construction and include all labor, equipment and material required to complete the Task as described in the CTC.
- ☑ All labor, material, equipment, spare parts, and documents required by a Technical Specification

copyright © 2026 The Gordian Group, Inc.

shall be considered included in the unit price, unless the Task description states otherwise.

- ☑ If the Contractor uses a crane or other lifting equipment (except a truck mounted boom lift or other equipment as part of the delivery process) to lift material onto a roof, even if that roof is less than 2 stories, the Contractor will be paid for such crane or lifting equipment as a separate Task.
- ☑ Unit prices include all fasteners such as anchor bolts, lag bolts, screws, adhesive, wedge anchors, expansion bolts, roofing clips (excluding hurricane clips) required. Fasteners listed separately in the CTC are for use with Owner furnished material and equipment or for relocating or reinstalling existing material and equipment.
- ☑ Unit prices exclude more substantial mounting material such as threaded rod or angle iron unless the Task description states otherwise.
- ☑ Unit prices for doors and windows, duct work, plumbing fixtures, seamless floors, countertops, roof flashing, pitch pockets, skylights, roof curbs, exterior trim, etc. include sealant and caulking.
- ☑ Unit prices include testing, calibrating, balancing, start-up services and the like required to ensure proper installation, construction and performance of the work (e.g. compaction test for backfill, balancing of heating ventilation and air conditioning, pneumatic or hydrostatic testing, soaping of joints, disinfection and flushing of water lines, etc.). Contractor may be paid for testing, calibrating, balancing, start-up services and the like for Owner supplied materials and equipment, or when working on or tying into existing materials and equipment.
- ☑ For the purpose of calculating the quantity of a Task, quantities are calculated on a per project basis. The quantity so determined shall be used for the Task and all appropriate modifiers, unless the Task states otherwise.
- ☑ Whenever there are alternative Tasks that may be selected to complete work, the Contractor shall select the most practical and economical Tasks available (e.g. rental of equipment by weeks or months rather than days, or painting by roller or spray rather than brush).

Demolition:

- ☑ Unit prices for demolition include all labor, equipment and material required for the complete removal of the items; clean-up of the area; and transporting the demolished items up or down 2 stories into a truck, dumpster, or to an Owner designated area, located within 125' of the project site.
- ☑ Unit prices for demolition exclude costs for hauling (See 01741900), dump fees (See 01741900), dumpsters (See 01741900), and trash chutes (See 01741900).
- ☑ If the item being demolished is attached to another item being removed and can be removed as one item, then that item shall not be priced as a separate demolition Task, unless the component must be demolished separately to accomplish the work (e.g. demolition of pipe includes pipe fittings unless the fitting must be demolished separately to accomplish the work; demolition of a wood door includes hinges, hardware, closures, kick plates, etc.).
- ☑ The word "replace" includes removal of the existing item and installation of the new item.
- ☑ The words "remove and relocate" or "remove and reinstall" include removal, cleaning, and installation of the existing item in either the same location or another location.
- ☑ Salvageable materials are the property of the Owner and shall, if directed, be turned over to the Owner.

Working Height:

- ☑ Typical working height for work other than masonry is up to 14' above the finished floor or stationary working surface. The Contractor will not be paid for scaffolding, lifts, or similar equipment for work below 14'.
- ☑ Typical working height for masonry work is up to 4' above the finished floor or stationary working surface. The Contractor will not be paid for scaffolding, lifts, or similar equipment for masonry work below 4'.

copyright © 2026 The Gordian Group, Inc.

Field Engineering:

☑ Surveying Tasks shall be used only when the Owner requests the Contractor to perform topographic surveys, property line surveys or to establish horizontal and vertical control points. If the Owner provides horizontal and vertical control points within or adjacent to the project site, all other surveying required to complete the work shall be considered construction staking or layout, and the cost thereof is included in the appropriate Tasks.

Assemblies:

☑ Assembly Tasks take precedence over individual component Tasks.

Restricted and Confined Spaces:

☑ Restricted Working Space is defined as any area with less than 3' vertical or horizontal clearance and includes areas such as crawl spaces, ceiling plenums where the grid is not removed, narrow piping tunnels, and equipment rooms where the space to install the new work is congested as a result of equipment and piping placement that meet these dimensional restrictions. A Restricted Working Space modifier is available for certain mechanical piping and piping accessories Tasks and for certain electrical conduit and conduit accessories Tasks. Only those Tasks with a modifier for Restricted Working Space are eligible for a price adjustment, and then only if the modifier applies to the contemplated Tasks. A Non-Prepriced Task will not be allowed because of Restricted Working Space for any Task.

☑ The Code of Federal Regulations (29 CFR part 1926, Subpart AA) define confined spaces and permit-required confined spaces for construction and set forth requirements, procedures and safety precautions for working in such spaces. If the Contractor must work in a confined space or a permit-required confined space and must provide ventilation equipment, air monitoring equipment and services, entry attendants, entry supervisors, site-specific training for workers, or other equipment and services required by the regulations, then the Contractor shall be paid for such equipment, services and training. Those costs shall not be included in the Adjustment Factors.

Or Equals:

☑ Whenever material, products, or equipment is identified in the CTC, or in the Technical Specifications, by reference to a manufacturer's name, make or model number, the identification is intended to establish a standard. Any material, product, or equipment of another manufacturer may be considered an or-equal provided that, in the opinion of the Owner, the material, product, or equipment so proposed is of equal quality, substance and function to the named item. The Contractor shall not install any proposed material, product, or equipment without the prior written approval of the Owner. The burden of proof, and all costs related thereto, concerning whether the proposed material, product, or equipment is an or-equal, shall be borne by the Contractor.

Useful Information:

Unit of Measure Definitions:

ACR – Acre, **BAG** – Bag, **BBL** – Barrel, **BCY** - Bank (In-place) Cubic Yards, **BF** - Board Foot, **BOX** - Box (each), **BTU** - British Thermal Unit, **C** - One Hundred, **CCF** - One Hundred Cubic Feet, **CCY** - Compacted Cubic Yards, **CF** - Cubic Foot, **CFM** - Cubic Feet Per Minute, **CI** – Cubic Inch, **CLF** - One Hundred Linear Feet, **CSF** - One Hundred Square Feet, **CSY** - Hundred Square Yards, **CWT** - Hundred Weight, **CY** - Cubic Yard, **CYM** - Cubic Yard Mile, **DAY** – Day, **DRM** - Drum (each), **EA** – Each, **FLR** - Floor (Per Floor), **FT** – Foot, **GAL** – Gallon, **GSF** - Ground Square Foot or Gross Square Foot, **HR** – Hour, **HWT** - Hundred Carton Weight, **HDAY – Half Day, HYR** – Half Year, **IN** – Inch, **JOB** – Job, **LAN** – Lane, **LB** – Pound, **LCY** - Loose

copyright © 2026 The Gordian Group, Inc.

(Excavated) Cubic Yards, **LF** - Linear Foot, **LFD** - Linear Feet Per Day, **LIT –** Liter, **LOT** – Lot, **MBF** - One Thousand Board Feet, **MBH** - One Thousand British Thermal Units, **MCF** – One Thousand Cubic Feet, **MF3** - One Thousand Cubic Feet Per Minute, **MGL** – One Thousand Gallons, **MI** – Mile, **MLF** - One Thousand Linear Feet, **MO** – Month, **MSF** - One Thousand Square Feet, **MSY** - One Thousand Square Yards, **MT** – Metric Ton, **MTK** – Metric Ton Kilometer, **M2** – Square Meter, **M3K** – Cubic Meter Kilometer, **NTE** – Note, **OPN** – Opening, **OUT** - Outlet or Output (each), **OZ** – Ounce, **PKG** – Package, **PNT** – Point, **PR** – Pair, **QT** – Quart, **ROL** - Roll (each), **ROM** – Room, **ROW** – Row, **RSR** - Riser (Per Rise), **SEA** – Seat, **SET** – Set, **SF** - Square Foot, **SHT** – Sheet, **SI** - Square Inch, **STP** - Stop (each), **SQ** - Square or One Hundred Square Feet, **SY** - Square Yard, **SYI** – Inches per Square Yard, **TNM** - Tons per Mile, **TON** – Ton, **TRK** – Truck Load, **UI** - United Inch, **UNT** – Unit, **VLF** - Vertical Linear Foot, **WK** – Week, **YD** – Yard, **YR** – Year

Material Weights:

Earthen Material

☑ The following engineering values for establishing shrink/swell factors shall be used unless otherwise directed by the Owner.

	Material Weight (Lbs Per CY)		
Material	In-place (Bank)	Loose (Excavated Materials)	Compacted
Earth, Common (Average)	3170	2536	3520
Sand	2880	2590	3240
Earth, Rock Mix. (75% E/ 25% R)	3380	2370	3720
Earth, Rock Mix. (50% E/50% R)	3750	2710	4000
Earth, Rock Mix. (25% E/ 75% R)	4120	3140	3680
Gravel (Average)	3280	2730	3570
Limestone	4380	2690	3220
Riprap Rock (Average)	4500	2610	3150
Granite	4540	2640	3170
Basalt	4950	3020	3640
Clay	3220	2150	3570
Gneiss	4550	2720	3180

Bulk Factors for Demolition:

☑ The following bulk factors shall be used to calculate the volume of demolished material to be transported from the project site.

- **Asphalt** = 1.25
- **Concrete** = 1.40

Conversions:

1 Acre = 43,560 Square Feet = 4046.8 Square Meters

1 Board Foot = 12” x 12” x 1” = 144 Cubic Inches

1 Centimeter = 0.3937 Inches = 0.0328 Feet

1 Cubic Foot = 0.03704 Cubic Yards = 0.02832 Cubic Meters

1 Cubic Meter = 1.3080 Cubic Yards = 35.3147 Cubic Feet

1 Cubic Yard = 27 Cubic Feet = 0.7646 Cubic Meters

1 Foot = 12 Inches = 0.3048 Meters

1 Inch = 2.54 Centimeters = 0.0254 Meters

1 Kilogram = 2.2046 Pounds

1 Kilometer = 0.6214 Miles = 3280 Feet

1 Meter = 100 Centimeters = 3.2808 Feet

1 Mile = 5280 Feet = 1.6093 Kilometers

1 Pound = 0.4536 Kilograms

1 Square Foot = 144 Square Inches = .0929 Square Meters

1 Square Meter = 1.1960 Square Yards = 10.7639 Square Feet

1 Square Yard = 9 Square Feet = 0.8361 Square Meters

2026

copyright © 2026 The Gordian Group, Inc.

1 Ton = 2000 Pounds = 907.185 Kilograms

1 Yard = 3 Feet = 0.9144 Meters

Sheet Metal Thickness (inches)				
Gage No.	Steel Sheet	Galvanized Steel Sheet	Stainless Steel Sheet	Aluminum Sheet
10	.135	.138	.141	
11	.120	.123	.125	
12	.105	.108	.109	
13	.090	.093	.094	.072
14	.075	.079	.078	.064
15	.067	.071	.070	.057
16	.060	.064	.063	.051
17	.054	.058	.056	.045
18	.048	.052	.050	.040
19	.042	.046	.044	.036
20	.036	.040	.038	.032
21	.033	.037	.034	.028
22	.030	.034	.031	.025
23	.027	.031	.028	.023
24	.024	.028	.025	.020
25	.021	.025	.022	.018
26	.018	.022	.019	.017

Standard Geometry:

Circle

- Circumference = 2 π radius = π diameter
- Area = π radius^2 = π (diameter^2 / 4)

Cylinder

- Volume = (π radius^2) height
- Surface Area = 2 π radius^2+(2 π radius) height

Sphere

- Volume = (4 π radius^3) / 3
- Surface Area = 4 π radius^2

π = 3.14159

United Inch

- The industry standard for measuring windows is the United Inch or UI. The UI is determined by adding the width and the height in inches.

Trademarks

☑ Job Order Contracting Advanced, Job Order Contracting Complete, Job Order Contracting Complete Management, PROGEN, eGordian, ezIQC, Construction Task Catalog, Catalog of Construction Tasks, and DMAP are either registered trademarks or trademarks of The Gordian Group, Inc. The names of actual companies and products mentioned herein may be the trademarks of their respective owners.

copyright © 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

01 General Requirements

01 10 Summary *(01)*

01 11 Summary Of Work *(01 10)*

01 11 13 Work Covered by Contract Documents *(01 11)*

Note: For specification publishing. Review specifications for requirements.

01 11 13 00-0001 NTE Work Covered by Contract Documents 0.00
Note: For specification publishing. Review specifications for requirements.

01 11 19 Purchase Contracts *(01 11)*

01 11 19 00-0001 Purchase Contracts *(01 11 19)*
Note: Vendor supplied materials which are not included in a task or an Adjustment Factor as explained in the Contract or The Construction Task Catalog®.

01 11 19 00-0002 EA GSA Schedule Purchases - Contractor Multiplier May Apply 1.00
Note: Purchases made by the contractor using the GSA Schedule will be reimbursed to the Contractor at the actual cost of the purchase. The base cost of the purchase is $1.00, quantity will adjust cost to actual purchase cost, i.e.; quantity of 125 = $125.00 purchase. If there are multiple purchases, list each one separately and add a comment in the "note" block to identify the Purchase Contracts. Insert the appropriate quantity to adjust the base cost to the actual Purchase Contracts. The Adjustment Factor should be 1.00. A copy of each receipt, invoice, or proof of payment shall be submitted with the Price Proposal. Excludes labor and equipment costs for installation.

01 20 Price and Payment Procedures *(01)*

01 22 Unit Prices *(01 20)*

Note: Provide digital copies of photographs.

01 22 16 Unit Price Payment *(01 22)*

01 22 16 00-0001 Reimbursable Fees *(01 22 16)*
Note: Reimbursable fees include but are not limited to permits, special inspections, special insurance, additional warranties, tolls, expedited shipping costs, etc, which are not included in a task or an Adjustment Factor as explained in the Contract or The Construction Task Catalog®.

01 22 16 00-0002 EA Reimbursable Fees 1.00
Note: Reimbursable Fees will be paid to the contractor for eligible costs as directed by Owner. Insert the appropriate quantity to adjust the base cost to the actual Reimbursable Fee. If there are multiple Reimbursable Fees, list each one separately and add a comment in the "note" block to identify the Reimbursable Fee (e.g. sidewalk closure, road cut, various permits, extended warranty, expedited shipping costs, etc.). A copy of each receipt, invoice, or proof of payment shall be submitted with the Price Proposal.

01 22 16 00-0003 Negotiated Travel Costs *(01 22 16)*
Note: To be used only at the request of authorized personal for non-commuting travel costs.

01 22 16 00-0004 EA Negotiated Travel Costs 1.00
Note: Supporting documentation must be included with each Work Order.

01 22 20 Wage Rates *(01 22)*

01 22 20 00-0001 Local Labor/Wage Rates *(01 22 20)*
Note: Welders receive the rate prescribed for the craft performing the operation to which the welding is incidental.

01 22 20 00-0002 HR Asbestos Removal Worker 99.89
Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.
For Foreperson, Add *4.99*
For Apprentice, Deduct *-19.98*

01 22 20 00-0003 HR Insulator 135.32
Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.
For Foreperson, Add *6.77*
For Apprentice, Deduct *-27.06*

01 22 20 00-0004 HR Boilermaker 123.46
Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.
For Foreperson, Add *6.17*
For Apprentice, Deduct *-24.69*

01 22 20 00-0005 HR Brick Layer 112.53
Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.
For Foreperson, Add *5.63*
For Apprentice, Deduct *-22.51*

01 22 20 00-0006 HR Carpenter 141.57
Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.
For Foreperson, Add *7.08*
For Apprentice, Deduct *-28.31*

01 22 20 00-0007 HR Carpet, Linoleum 114.84
Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.
For Foreperson, Add *5.74*
For Apprentice, Deduct *-22.97*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 20 00-0008	HR	Cement Mason	105.27	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*5.26*	
		For Apprentice, Deduct	*-21.05*	
01 22 20 00-0009	HR	Drywall Finisher	129.58	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*6.48*	
		For Apprentice, Deduct	*-25.92*	
01 22 20 00-0010	HR	Electrician, Inside Wireman	112.03	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*5.60*	
		For Apprentice, Deduct	*-22.41*	
01 22 20 00-0011	HR	Electrician, Cable Splicer	127.13	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*6.36*	
		For Apprentice, Deduct	*-25.43*	
01 22 20 00-0012	HR	High Voltage Electrician, Utility Lineman	144.29	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
01 22 20 00-0013	HR	Equipment Operator, Crane, Group 1-A	136.52	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
01 22 20 00-0014	HR	Equipment Operator, Crane, Group 2-A	134.05	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*6.70*	
01 22 20 00-0015	HR	Equipment Operator, Crane, Group 3-A	131.66	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
01 22 20 00-0016	HR	Equipment Operator, Medium, Group 3	131.12	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*6.56*	
		For Apprentice, Deduct	*-26.22*	
01 22 20 00-0017	HR	Equipment Operator, Medium, Group 4	129.18	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
01 22 20 00-0018	HR	Equipment Operator, Medium, Group 5	127.42	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
01 22 20 00-0019	HR	Equipment Operator, Light, Group 6	125.56	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*6.28*	
		For Apprentice, Deduct	*-25.11*	
01 22 20 00-0020	HR	Equipment Operator, Light, Group 7	123.98	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
01 22 20 00-0021	HR	Equipment Operator, Light, Group 8	122.40	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
01 22 20 00-0022	HR	Glazier	111.90	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*5.60*	
		For Apprentice, Deduct	*-22.38*	
01 22 20 00-0023	HR	Laborer	95.29	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
01 22 20 00-0024	HR	Lather	133.52	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*6.68*	
		For Apprentice, Deduct	*-26.70*	
01 22 20 00-0025	HR	Marble Setter	132.03	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*6.60*	
		For Apprentice, Deduct	*-26.41*	
01 22 20 00-0026	HR	Millwright	137.51	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*6.88*	
		For Apprentice, Deduct	*-27.50*	
01 22 20 00-0027	HR	Mold Removal Worker	99.51	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*4.98*	
		For Apprentice, Deduct	*-19.90*	
01 22 20 00-0028	HR	Painter, Ordinary	93.66	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*4.68*	
		For Apprentice, Deduct	*-18.73*	
01 22 20 00-0029	HR	Painter, Structural Steel	101.35	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*5.07*	
		For Apprentice, Deduct	*-20.27*	
01 22 20 00-0030	HR	Paperhanger	93.66	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*4.68*	
		For Apprentice, Deduct	*-18.73*	
01 22 20 00-0031	HR	Pile Drivers	151.42	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*7.57*	
		For Apprentice, Deduct	*-30.28*	
01 22 20 00-0032	HR	Plasterer	126.75	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*6.34*	
		For Apprentice, Deduct	*-25.35*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 20 00-0033	HR	Plumber	128.55	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*6.43*	
		For Apprentice, Deduct	*-25.71*	
01 22 20 00-0034	HR	Powderman	99.89	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*4.99*	
		For Apprentice, Deduct	*-19.98*	
01 22 20 00-0035	HR	Rodman (Reinforcing)/Ornamental Steel Worker	115.12	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*5.76*	
		For Apprentice, Deduct	*-23.02*	
01 22 20 00-0036	HR	Roofer, Composite	136.82	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*6.84*	
		For Apprentice, Deduct	*-27.36*	
01 22 20 00-0037	HR	Roofer, Metal	152.46	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*7.62*	
		For Apprentice, Deduct	*-30.49*	
01 22 20 00-0038	HR	Roofer, Tile/Slate	132.64	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*6.63*	
		For Apprentice, Deduct	*-26.53*	
01 22 20 00-0039	HR	Sheet Metal Worker	131.87	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*6.59*	
		For Apprentice, Deduct	*-26.37*	
01 22 20 00-0040	HR	Sprinkler Installer	104.42	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*5.22*	
		For Apprentice, Deduct	*-20.88*	
01 22 20 00-0041	HR	Steam / Pipe Fitter	128.55	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*6.43*	
		For Apprentice, Deduct	*-25.71*	
01 22 20 00-0042	HR	Stone Mason	112.53	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*5.63*	
		For Apprentice, Deduct	*-22.51*	
01 22 20 00-0043	HR	Iron Worker, Structural	118.56	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*5.93*	
		For Apprentice, Deduct	*-23.71*	
01 22 20 00-0044	HR	Tile Layer	108.42	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*5.42*	
		For Apprentice, Deduct	*-21.68*	
01 22 20 00-0045	HR	Terrazzo Worker	123.99	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*6.20*	
		For Apprentice, Deduct	*-24.80*	
01 22 20 00-0046	HR	Truck Driver, Light, Group 1	99.89	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*4.99*	
		For Apprentice, Deduct	*-19.98*	
01 22 20 00-0047	HR	Truck Driver, Medium, Group 2	100.34	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
01 22 20 00-0048	HR	Truck Driver, Heavy, Group 3	100.79	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*5.04*	
		For Apprentice, Deduct	*-20.16*	
01 22 20 00-0049	HR	Truck Driver, Heavy, Group 4	101.31	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
01 22 20 00-0050	HR	Class I Diver	245.01	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
01 22 20 00-0051	HR	Class III Diver Tender	171.14	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
01 22 20 00-0052	HR	Welder	118.56	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
		For Foreperson, Add	*5.93*	
		For Apprentice, Deduct	*-23.71*	
01 22 20 00-0053	HR	D1 Certified Welder	138.11	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
01 22 20 00-0054	HR	Lighting Maintenance Worker	112.03	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		

01 22 20 00-0055 Rates For Services *(01 22 20)*

01 22 20 00-0056	HR	Watch/Guard Person, Unarmed	35.33	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
01 22 20 00-0057	HR	Watch/Guard Person, Armed	45.55	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		
01 22 20 00-0058	HR	Surveyor, Rod Person	123.88	
		Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 20 00-0059	HR	Senior Surveyor, Party Chief Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.	140.87	
01 22 20 00-0060	HR	Surveyor, Instrument Person Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.	126.02	
01 22 20 00-0061	HR	On-Site Certified Materials Testing Technician Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.	97.05	
01 22 20 00-0062	HR	Certified Industrial Hygienist Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.	130.82	
01 22 20 00-0063	HR	Underground Utility Surveyor	137.00	
01 22 20 00-0064	MI	Mileage For Professional Services (Engineering, Surveying, etc.) Note: For use only when the Owner directs the contractor to use personnel whose base of operations is more than 100 miles from the site. Quantity shall be miles that exceed 100.	0.72	
01 22 20 00-0065	DAY	Gas Detection Service To Monitor The Project Site For The Presence Of Gas Note: Includes equipment, project manager, notices and reports.	947.43	
01 22 20 00-0066	HR	System Testing Engineer	90.00	
01 22 20 00-0067	HR	Manufacturer Technical Advisor Note: For oversight of installation of special manufactured equipment. Advisor to be requested by and cost to be approved by Owner only.	100.00	
01 22 20 00-0068	HR	Fire Watch Laborer Note: Fire watchers shall be required whenever welding or cutting is performed in locations where other than a minor fire might develop, or any of the following conditions exist: (1) Appreciable combustible material, in building construction or contents, closer than 35 feet (10.7 m) to the point of operation. (2) Appreciable combustibles are more than 35 feet (10.7 m) away but are easily ignited by sparks. (3) Wall or floor openings within a 35-foot (10.7 m) radius expose combustible material in adjacent areas including concealed spaces in walls or floors. (4) Combustible materials are adjacent to the opposite side of metal partitions, walls, ceilings, or roofs and are likely to be ignited by conduction or radiation.	95.29	

01 22 20 00-0069 Rates For Project Management Services *(01 22 20)*

Note: Includes subcontracted rates with burden and mark-up

01 22 20 00-0070	HR	Project Manager Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.	160.00	

01 22 20 00-0071 Rates For Architectural And Engineering Services *(01 22 20)*

Note: For preparation of contract documents, structural and/or design drawings, special investigating requirements or services outside required architectural and engineering services. Includes subcontracted rates with burden and mark-up

01 22 20 00-0072	HR	Principal Architect Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.	243.12	
01 22 20 00-0073	HR	Senior Architect Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.	179.38	
01 22 20 00-0074	HR	Architect Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.	140.62	
01 22 20 00-0075	HR	Principal Engineer Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.	210.00	
01 22 20 00-0076	HR	Senior Engineer Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.	174.12	
01 22 20 00-0077	HR	Engineer Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.	137.00	
01 22 20 00-0078	HR	Draft Person Note: For tasks not included in the Construction Task Catalog® and as directed by owner only.	71.88	

01 22 20 00-0079 Rates For Traffic Control *(01 22 20)*

01 22 20 00-0080	DAY	Pilot Vehicle With Driver Note: Includes radio, "Follow Me" sign, "Wait For Pilot Car" signs on barricades where required.	1,168.16	
01 22 20 00-0081	HR	Flagperson For Traffic Control	95.29	

01 22 20 00-0082 Traffic Control *(01 22 20)*

01 22 20 00-0083	DAY	Traffic Control System Note: Includes 1 truck, 1 arrow board, 1 licensed traffic control person, traffic cones.	2,081.00	
01 22 20 00-0084	EA	Traffic Control Drawings Note: Includes engineered stamped drawings as required by governing agency.	1,287.66	

01 22 20 00-0085 Transport And Escort Vehicles *(01 22 20)*

01 22 20 00-0086	HR	Escort Vehicle With Driver	108.10	
01 22 20 00-0087	HR	Transport Vehicle With Driver	153.90	

01 22 23 Equipment Usage *(01 22)*

Note: Includes fuel costs unless otherwise stated. These tasks shall be used for owned, leased or rented equipment. Excludes mobilization unless otherwise stated. See CSI section 01 22 20 00-0079 for traffic control (where required), 01 71 13 00-0000 for equipment delivery, pickup, mobilization and demobilization.

01 22 23 00-0001 Aerial Equipment *(01 22 23)*

01 22 23 00-0002 Man Lifts *(01 22 23 00-0001)*

Note: Excludes operator, delivery, set-up, and removal.

01 22 23 00-0003 Telescoping Boom Man Lifts With Platform *(01 22 23 00-0002)*

copyright 2026 The Gordian Group, Inc.

CSI	MINOR UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-0004		Engine Powered, Telescoping Boom Man Lifts With Platform *(01 22 23 00-0003)*		
		Note: Diesel or dual fuel (gasoline or liquid propane gas). Two-wheel drive. For use on unpaved or paved surfaces.		
01 22 23 00-0005	DAY	40' Engine Powered, Telescoping Boom Man Lift With Platform	430.56	
		For Four-Wheel Drive, Add	*96.88*	
		For Half Day Usage, Deduct	*-134.55*	
01 22 23 00-0006	WK	40' Engine Powered, Telescoping Boom Man Lift With Platform	1,083.34	
		For Four-Wheel Drive, Add	*243.75*	
01 22 23 00-0007	MO	40' Engine Powered, Telescoping Boom Man Lift With Platform	2,430.58	
		For Four-Wheel Drive, Add	*546.88*	
		For >6 Months (>26 Weeks), Deduct	*-97.22*	
01 22 23 00-0008	DAY	60' Engine Powered, Telescoping Boom Man Lift With Platform	631.95	
		For Four-Wheel Drive, Add	*142.19*	
		For Half Day Usage, Deduct	*-197.48*	
01 22 23 00-0009	WK	60' Engine Powered, Telescoping Boom Man Lift With Platform	1,506.96	
		For Four-Wheel Drive, Add	*339.07*	
01 22 23 00-0010	MO	60' Engine Powered, Telescoping Boom Man Lift With Platform	3,298.64	
		For Four-Wheel Drive, Add	*742.19*	
		For >6 Months (>26 Weeks), Deduct	*-131.95*	
01 22 23 00-0011	DAY	80' Engine Powered, Telescoping Boom Man Lift With Platform	1,229.18	
		For Four-Wheel Drive, Add	*276.57*	
		For Half Day Usage, Deduct	*-384.12*	
01 22 23 00-0012	WK	80' Engine Powered, Telescoping Boom Man Lift With Platform	2,979.19	
		For Four-Wheel Drive, Add	*670.32*	
01 22 23 00-0013	MO	80' Engine Powered, Telescoping Boom Man Lift With Platform	6,250.05	
		For Four-Wheel Drive, Add	*1,406.26*	
		For >6 Months (>26 Weeks), Deduct	*-250.00*	
01 22 23 00-0014	DAY	110' Engine Powered, Telescoping Boom Man Lift With Platform	1,750.01	
		For Four-Wheel Drive, Add	*393.75*	
		For Half Day Usage, Deduct	*-546.88*	
01 22 23 00-0015	WK	110' Engine Powered, Telescoping Boom Man Lift With Platform	4,213.92	
		For Four-Wheel Drive, Add	*948.13*	
01 22 23 00-0016	MO	110' Engine Powered, Telescoping Boom Man Lift With Platform	10,500.08	
		For Four-Wheel Drive, Add	*2,362.52*	
		For >6 Months (>26 Weeks), Deduct	*-420.00*	
01 22 23 00-0017	DAY	120' Engine Powered, Telescoping Boom Man Lift With Platform	2,131.96	
		For Four-Wheel Drive, Add	*479.69*	
		For Half Day Usage, Deduct	*-666.24*	
01 22 23 00-0018	WK	120' Engine Powered, Telescoping Boom Man Lift With Platform	5,437.54	
		For Four-Wheel Drive, Add	*1,223.45*	
01 22 23 00-0019	MO	120' Engine Powered, Telescoping Boom Man Lift With Platform	12,361.21	
		For Four-Wheel Drive, Add	*2,781.27*	
		For >6 Months (>26 Weeks), Deduct	*-494.45*	
01 22 23 00-0020		Articulating (Up/Over) Boom Man Lifts With Platform *(01 22 23 00-0002)*		
01 22 23 00-0021		Engine Powered, Articulating (Up/Over) Boom Man Lifts With Platform *(01 22 23 00-0020)*		
		Note: Diesel or dual fuel (gasoline or liquid propane gas). Four-wheel drive. For use on unpaved or paved surfaces.		
01 22 23 00-0022	DAY	34' Engine Powered, Articulating (Up/Over) Boom Man Lift With Platform	403.26	
		For Half Day Usage, Deduct	*-126.02*	
01 22 23 00-0023	WK	34' Engine Powered, Articulating (Up/Over) Boom Man Lift With Platform	1,011.82	
01 22 23 00-0024	MO	34' Engine Powered, Articulating (Up/Over) Boom Man Lift With Platform	2,434.22	
		For >6 Months (>26 Weeks), Deduct	*-97.37*	
01 22 23 00-0025	DAY	45' Engine Powered, Articulating (Up/Over) Boom Man Lift With Platform	513.24	
		For Half Day Usage, Deduct	*-160.39*	
01 22 23 00-0026	WK	45' Engine Powered, Articulating (Up/Over) Boom Man Lift With Platform	1,121.80	
01 22 23 00-0027	MO	45' Engine Powered, Articulating (Up/Over) Boom Man Lift With Platform	2,784.69	
		For >6 Months (>26 Weeks), Deduct	*-111.39*	
01 22 23 00-0028	DAY	60' Engine Powered, Articulating (Up/Over) Boom Man Lift With Platform	659.88	
		For Half Day Usage, Deduct	*-206.21*	
01 22 23 00-0029	WK	60' Engine Powered, Articulating (Up/Over) Boom Man Lift With Platform	1,525.06	
01 22 23 00-0030	MO	60' Engine Powered, Articulating (Up/Over) Boom Man Lift With Platform	3,409.38	
		For >6 Months (>26 Weeks), Deduct	*-136.38*	
01 22 23 00-0031	DAY	80' Engine Powered, Articulating (Up/Over) Boom Man Lift With Platform	1,151.12	
		For Half Day Usage, Deduct	*-359.73*	
01 22 23 00-0032	WK	80' Engine Powered, Articulating (Up/Over) Boom Man Lift With Platform	2,712.84	
01 22 23 00-0033	MO	80' Engine Powered, Articulating (Up/Over) Boom Man Lift With Platform	6,597.33	
		For >6 Months (>26 Weeks), Deduct	*-263.89*	
01 22 23 00-0034	DAY	125' Engine Powered, Articulating (Up/Over) Boom Man Lift With Platform	2,236.26	
		For Half Day Usage, Deduct	*-698.83*	
01 22 23 00-0035	WK	125' Engine Powered, Articulating (Up/Over) Boom Man Lift With Platform	5,279.04	
01 22 23 00-0036	MO	125' Engine Powered, Articulating (Up/Over) Boom Man Lift With Platform	12,904.32	
		For >6 Months (>26 Weeks), Deduct	*-516.17*	
01 22 23 00-0037		Electric, Articulating (Up/Over) Boom Man Lifts With Platform *(01 22 23 00-0020)*		
		Note: For use on paved surfaces.		
01 22 23 00-0038	DAY	30' Electric, Articulating (Up/Over) Boom Man Lift With Platform	403.26	
		For Half Day Usage, Deduct	*-126.02*	
01 22 23 00-0039	WK	30' Electric, Articulating (Up/Over) Boom Man Lift With Platform	1,011.82	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-0040	MO	30' Electric, Articulating (Up/Over) Boom Man Lift With Platform	2,434.22	
		For >6 Months (>26 Weeks), Deduct	*-97.37*	
01 22 23 00-0041	DAY	35' Electric, Articulating (Up/Over) Boom Man Lift With Platform	403.26	
		For Half Day Usage, Deduct	*-126.02*	
01 22 23 00-0042	WK	35' Electric, Articulating (Up/Over) Boom Man Lift With Platform	1,011.82	
01 22 23 00-0043	MO	35' Electric, Articulating (Up/Over) Boom Man Lift With Platform	2,434.22	
		For >6 Months (>26 Weeks), Deduct	*-97.37*	
01 22 23 00-0044	DAY	40' Electric, Articulating (Up/Over) Boom Man Lift With Platform	498.58	
		For Half Day Usage, Deduct	*-155.81*	
01 22 23 00-0045	WK	40' Electric, Articulating (Up/Over) Boom Man Lift With Platform	1,077.80	
01 22 23 00-0046	MO	40' Electric, Articulating (Up/Over) Boom Man Lift With Platform	2,676.18	
		For >6 Months (>26 Weeks), Deduct	*-107.05*	
01 22 23 00-0047	DAY	45' Electric, Articulating (Up/Over) Boom Man Lift With Platform	498.58	
		For Half Day Usage, Deduct	*-155.81*	
01 22 23 00-0048	WK	45' Electric, Articulating (Up/Over) Boom Man Lift With Platform	1,077.80	
01 22 23 00-0049	MO	45' Electric, Articulating (Up/Over) Boom Man Lift With Platform	2,676.18	
		For >6 Months (>26 Weeks), Deduct	*-107.05*	

01 22 23 00-0050 Platform Lifts *(01 22 23 00-0001)*

Note: Excludes operator, delivery, set-up, and removal.

01 22 23 00-0051 Electric, Scissor Platform Lifts *(01 22 23 00-0050)*

Note: For use on paved surfaces.

01 22 23 00-0052	DAY	17' Electric, Scissor Platform Lift	174.24	
		For Half Day Usage, Deduct	*-54.45*	
01 22 23 00-0053	WK	17' Electric, Scissor Platform Lift	348.48	
01 22 23 00-0054	MO	17' Electric, Scissor Platform Lift	712.80	
		For >6 Months (>26 Weeks), Deduct	*-28.51*	
01 22 23 00-0055	DAY	20' Electric, Scissor Platform Lift	190.08	
		For Half Day Usage, Deduct	*-59.40*	
01 22 23 00-0056	WK	20' Electric, Scissor Platform Lift	380.16	
01 22 23 00-0057	MO	20' Electric, Scissor Platform Lift	760.32	
		For >6 Months (>26 Weeks), Deduct	*-30.41*	
01 22 23 00-0058	DAY	25' Electric, Scissor Platform Lift	245.52	
		For Half Day Usage, Deduct	*-76.73*	
01 22 23 00-0059	WK	25' Electric, Scissor Platform Lift	491.04	
01 22 23 00-0060	MO	25' Electric, Scissor Platform Lift	1,053.36	
		For >6 Months (>26 Weeks), Deduct	*-42.13*	
01 22 23 00-0061	DAY	30' Electric, Scissor Platform Lift	316.80	
		For Half Day Usage, Deduct	*-99.00*	
01 22 23 00-0062	WK	30' Electric, Scissor Platform Lift	625.68	
01 22 23 00-0063	MO	30' Electric, Scissor Platform Lift	1,386.00	
		For >6 Months (>26 Weeks), Deduct	*-55.44*	
01 22 23 00-0064	DAY	33' Electric, Scissor Platform Lift	340.56	
		For Half Day Usage, Deduct	*-106.43*	
01 22 23 00-0065	WK	33' Electric, Scissor Platform Lift	665.28	
01 22 23 00-0066	MO	33' Electric, Scissor Platform Lift	1,504.80	
		For >6 Months (>26 Weeks), Deduct	*-60.19*	
01 22 23 00-0067	DAY	40' Electric, Scissor Platform Lift	443.52	
		For Half Day Usage, Deduct	*-138.60*	
01 22 23 00-0068	WK	40' Electric, Scissor Platform Lift	1,100.88	
01 22 23 00-0069	MO	40' Electric, Scissor Platform Lift	3,065.04	
		For >6 Months (>26 Weeks), Deduct	*-122.60*	

01 22 23 00-0070 Engine Powered, Scissor Platform Lifts *(01 22 23 00-0050)*

Note: Diesel or dual fuel (gasoline or liquid propane gas). Two-wheel drive. For use on unpaved or paved surfaces.

01 22 23 00-0071	DAY	25' Engine Powered, Scissor Platform Lift	472.43	
		For Four-Wheel Drive, Add	*94.49*	
		For Half Day Usage, Deduct	*-147.63*	
01 22 23 00-0072	WK	25' Engine Powered, Scissor Platform Lift	923.87	
		For Four-Wheel Drive, Add	*184.77*	
01 22 23 00-0073	MO	25' Engine Powered, Scissor Platform Lift	2,257.18	
		For Four-Wheel Drive, Add	*451.44*	
		For >6 Months (>26 Weeks), Deduct	*-90.29*	
01 22 23 00-0074	DAY	33' Engine Powered, Scissor Platform Lift	482.93	
		For Four-Wheel Drive, Add	*96.59*	
		For Half Day Usage, Deduct	*-150.92*	
01 22 23 00-0075	WK	33' Engine Powered, Scissor Platform Lift	1,102.34	
		For Four-Wheel Drive, Add	*220.47*	
01 22 23 00-0076	MO	33' Engine Powered, Scissor Platform Lift	2,414.66	
		For Four-Wheel Drive, Add	*482.93*	
		For >6 Months (>26 Weeks), Deduct	*-96.59*	
01 22 23 00-0077	DAY	40' Engine Powered, Scissor Platform Lift	535.42	
		For Four-Wheel Drive, Add	*107.08*	
		For Half Day Usage, Deduct	*-167.32*	
01 22 23 00-0078	WK	40' Engine Powered, Scissor Platform Lift	1,228.32	
		For Four-Wheel Drive, Add	*245.66*	
01 22 23 00-0079	MO	40' Engine Powered, Scissor Platform Lift	2,729.61	
		For Four-Wheel Drive, Add	*545.92*	
		For >6 Months (>26 Weeks), Deduct	*-109.18*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-0080	DAY	43' Engine Powered, Scissor Platform Lift	566.92	
		For Four-Wheel Drive, Add	*113.38*	
		For Half Day Usage, Deduct	*-177.16*	
01 22 23 00-0081	WK	43' Engine Powered, Scissor Platform Lift	1,322.81	
		For Four-Wheel Drive, Add	*264.56*	
01 22 23 00-0082	MO	43' Engine Powered, Scissor Platform Lift	3,254.54	
		For Four-Wheel Drive, Add	*650.91*	
		For >6 Months (>26 Weeks), Deduct	*-130.18*	
01 22 23 00-0083	DAY	50' Engine Powered, Scissor Platform Lift	1,060.35	
		For Four-Wheel Drive, Add	*212.07*	
		For Half Day Usage, Deduct	*-331.36*	
01 22 23 00-0084	WK	50' Engine Powered, Scissor Platform Lift	2,330.67	
		For Four-Wheel Drive, Add	*466.13*	
01 22 23 00-0085	MO	50' Engine Powered, Scissor Platform Lift	5,732.18	
		For Four-Wheel Drive, Add	*1,146.44*	
		For >6 Months (>26 Weeks), Deduct	*-229.29*	

01 22 23 00-0086 Personnel Lifts *(01 22 23 00-0001)*

Note: Includes delivery to job site and pick-up when complete. Excludes operator. For use on paved surfaces.

01 22 23 00-0087	DAY	24', Push-Type, Electric Single Man Personnel Lift	165.70	
		For Half Day Usage, Deduct	*-51.78*	
01 22 23 00-0088	WK	24', Push-Type, Electric Single Man Personnel Lift	469.48	
01 22 23 00-0089	MO	24', Push-Type, Electric Single Man Personnel Lift	948.17	
		For >6 Months (>26 Weeks), Deduct	*-37.93*	
01 22 23 00-0090	DAY	30', Push-Type, Electric Single Man Personnel Lift	230.14	
		For Half Day Usage, Deduct	*-71.92*	
01 22 23 00-0091	WK	30', Push-Type, Electric Single Man Personnel Lift	487.89	
01 22 23 00-0092	MO	30', Push-Type, Electric Single Man Personnel Lift	1,656.99	
		For >6 Months (>26 Weeks), Deduct	*-66.28*	
01 22 23 00-0093	DAY	36', Push-Type, Electric Single Man Personnel Lift	386.63	
		For Half Day Usage, Deduct	*-120.82*	
01 22 23 00-0094	WK	36', Push-Type, Electric Single Man Personnel Lift	938.96	
01 22 23 00-0095	MO	36', Push-Type, Electric Single Man Personnel Lift	2,743.24	
		For >6 Months (>26 Weeks), Deduct	*-109.73*	
01 22 23 00-0096	DAY	40', Push-Type, Electric Single Man Personnel Lift	414.25	
		For Half Day Usage, Deduct	*-129.45*	
01 22 23 00-0097	WK	40', Push-Type, Electric Single Man Personnel Lift	1,031.02	
01 22 23 00-0098	MO	40', Push-Type, Electric Single Man Personnel Lift	3,102.25	
		For >6 Months (>26 Weeks), Deduct	*-124.09*	
01 22 23 00-0099	DAY	15', Self-Propelled, Electric Single Man Personnel Lift	220.93	
		For Half Day Usage, Deduct	*-69.04*	
01 22 23 00-0100	WK	15', Self-Propelled, Electric Single Man Personnel Lift	441.86	
01 22 23 00-0101	MO	15', Self-Propelled, Electric Single Man Personnel Lift	883.73	
		For >6 Months (>26 Weeks), Deduct	*-35.35*	
01 22 23 00-0102	DAY	20', Self-Propelled, Electric Single Man Personnel Lift	220.93	
		For Half Day Usage, Deduct	*-69.04*	
01 22 23 00-0103	WK	20', Self-Propelled, Electric Single Man Personnel Lift	441.86	
01 22 23 00-0104	MO	20', Self-Propelled, Electric Single Man Personnel Lift	918.71	
		For >6 Months (>26 Weeks), Deduct	*-36.75*	

01 22 23 00-0105 Bucket Trucks *(01 22 23 00-0001)*

Note: Includes full-time operator, delivery, and removal.

01 22 23 00-0106	DAY	29' To 33' Bucket Truck With Full-Time Operator	1,416.00	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-593.69*	
01 22 23 00-0107	WK	29' To 33' Bucket Truck With Full-Time Operator	5,860.64	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-0108	MO	29' To 33' Bucket Truck With Full-Time Operator	22,126.06	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-186.23*	
01 22 23 00-0109	DAY	38' To 41' Bucket Truck With Full-Time Operator	1,493.59	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-617.93*	
01 22 23 00-0110	WK	38' To 41' Bucket Truck With Full-Time Operator	6,110.06	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-0111	MO	38' To 41' Bucket Truck With Full-Time Operator	22,791.16	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-212.83*	
01 22 23 00-0112	DAY	45' To 48' Bucket Truck With Full-Time Operator	1,693.12	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-680.29*	
01 22 23 00-0113	WK	45' To 48' Bucket Truck With Full-Time Operator	6,470.32	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-0114	MO	45' To 48' Bucket Truck With Full-Time Operator	23,567.11	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-243.87*	
01 22 23 00-0115	DAY	62' Bucket Truck With Full-Time Operator	2,136.52	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-818.85*	
01 22 23 00-0116	WK	62' Bucket Truck With Full-Time Operator	7,911.37	
		For Equipment Without Operator, Deduct	*-4,031.62*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-0117	MO	62' Bucket Truck With Full-Time Operator	27,446.86	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-399.06*	
01 22 23 00-0118	DAY	85' Bucket Truck With Full-Time Operator	2,358.22	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-888.13*	
01 22 23 00-0119	WK	85' Bucket Truck With Full-Time Operator	8,687.32	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-0120	MO	85' Bucket Truck With Full-Time Operator	30,218.11	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-509.91*	
01 22 23 00-0121	Day	105' Bucket Truck With Full-Time Operator	2,469.07	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-922.77*	
01 22 23 00-0122	WK	105' Bucket Truck With Full-Time Operator	9,019.87	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-0123	MO	105' Bucket Truck With Full-Time Operator	30,484.15	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-520.55*	

01 22 23 00-0124 Air Equipment *(01 22 23)*

01 22 23 00-0125 Air Compressors *(01 22 23 00-0124)*

Note: Includes delivery, set-up, and removal. Excludes operator.

01 22 23 00-0126	DAY	100 CFM Diesel Powered Portable Air Compressor	170.20	
		For Half Day Usage, Deduct	*-53.19*	
01 22 23 00-0127	WK	100 CFM Diesel Powered Portable Air Compressor	510.62	
01 22 23 00-0128	MO	100 CFM Diesel Powered Portable Air Compressor	1,418.38	
		For >6 Months (>26 Weeks), Deduct	*-56.74*	
01 22 23 00-0129	DAY	130 CFM Diesel Powered Portable Air Compressor	204.25	
		For Half Day Usage, Deduct	*-63.83*	
01 22 23 00-0130	WK	130 CFM Diesel Powered Portable Air Compressor	601.39	
01 22 23 00-0131	MO	130 CFM Diesel Powered Portable Air Compressor	1,702.05	
		For >6 Months (>26 Weeks), Deduct	*-68.08*	
01 22 23 00-0132	DAY	185 CFM Diesel Powered Portable Air Compressor	272.33	
		For Half Day Usage, Deduct	*-85.10*	
01 22 23 00-0133	WK	185 CFM Diesel Powered Portable Air Compressor	612.74	
01 22 23 00-0134	MO	185 CFM Diesel Powered Portable Air Compressor	1,350.29	
		For >6 Months (>26 Weeks), Deduct	*-54.01*	
01 22 23 00-0135	DAY	375 CFM Diesel Powered Portable Air Compressor	385.80	
		For Half Day Usage, Deduct	*-120.56*	
01 22 23 00-0136	WK	375 CFM Diesel Powered Portable Air Compressor	975.84	
01 22 23 00-0137	MO	375 CFM Diesel Powered Portable Air Compressor	2,326.14	
		For >6 Months (>26 Weeks), Deduct	*-93.05*	
01 22 23 00-0138	DAY	600 CFM Diesel Powered Portable Air Compressor	857.83	
		For Half Day Usage, Deduct	*-268.07*	
01 22 23 00-0139	WK	600 CFM Diesel Powered Portable Air Compressor	2,065.15	
01 22 23 00-0140	MO	600 CFM Diesel Powered Portable Air Compressor	5,147.00	
		For >6 Months (>26 Weeks), Deduct	*-205.88*	
01 22 23 00-0141	DAY	750 CFM Diesel Powered Portable Air Compressor	1,032.58	
		For Half Day Usage, Deduct	*-322.68*	
01 22 23 00-0142	WK	750 CFM Diesel Powered Portable Air Compressor	2,541.73	
01 22 23 00-0143	MO	750 CFM Diesel Powered Portable Air Compressor	6,240.85	
		For >6 Months (>26 Weeks), Deduct	*-249.63*	
01 22 23 00-0144	DAY	825 CFM Diesel Powered Portable Air Compressor	1,032.58	
		For Half Day Usage, Deduct	*-322.68*	
01 22 23 00-0145	WK	825 CFM Diesel Powered Portable Air Compressor	2,541.73	
01 22 23 00-0146	MO	825 CFM Diesel Powered Portable Air Compressor	6,240.85	
		For >6 Months (>26 Weeks), Deduct	*-249.63*	
01 22 23 00-0147	DAY	1,300 CFM Diesel Powered Portable Air Compressor	1,202.78	
		For Half Day Usage, Deduct	*-375.87*	
01 22 23 00-0148	WK	1,300 CFM Diesel Powered Portable Air Compressor	2,696.05	
01 22 23 00-0149	MO	1,300 CFM Diesel Powered Portable Air Compressor	7,189.46	
		For >6 Months (>26 Weeks), Deduct	*-287.58*	
01 22 23 00-0150	DAY	1,600 CFM Diesel Powered Portable Air Compressor	1,497.80	
		For Half Day Usage, Deduct	*-468.06*	
01 22 23 00-0151	WK	1,600 CFM Diesel Powered Portable Air Compressor	3,370.06	
01 22 23 00-0152	MO	1,600 CFM Diesel Powered Portable Air Compressor	8,986.82	
		For >6 Months (>26 Weeks), Deduct	*-359.47*	

01 22 23 00-0153 Portable Negative Air Machines *(01 22 23 00-0124)*

Note: A Negative Air Machine is used in a sealed containment area to filter air and exhaust the filtered air through ducting to a location outside the sealed containment area. Includes delivery to job site and pick-up when complete. Excludes all filters and duct.

01 22 23 00-0154	DAY	Up To 2,000 CFM, Portable Negative Air Machine	98.30	
		For Half Day Usage, Deduct	*-30.72*	
01 22 23 00-0155	WK	Up To 2,000 CFM, Portable Negative Air Machine	403.72	
01 22 23 00-0156	MO	Up To 2,000 CFM, Portable Negative Air Machine	1,219.93	
		For >6 Months (>26 Weeks), Deduct	*-48.80*	
01 22 23 00-0157	EA	First Stage Pre-Filter For Portable Negative Air Machines	14.13	
01 22 23 00-0158	EA	Second Stage Pre-Filter For Portable Negative Air Machines	28.51	
01 22 23 00-0159	EA	High Efficiency Particulate Air (HEPA) Filter, 99.99% Efficient At 0.3 Micron For Portable Negative Air Machines	134.46	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-0160	LF	Flexible Exhaust Duct For Portable Negative Air Machines	2.39	

01 22 23 00-0161 Portable Air Scrubbers *(01 22 23 00-0124)*

Note: A Portable Air Scrubber filters and recirculates the filtered air into the same space and does not use ducting to exhaust the filtered air to a different location. Includes delivery to job site and pick-up when complete. Excludes all filters.

01 22 23 00-0162	DAY	Up To 1,000 CFM, Portable Air Scrubber	62.81	
		For Half Day Usage, Deduct	*-19.63*	
01 22 23 00-0163	WK	Up To 1,000 CFM, Portable Air Scrubber	261.10	
01 22 23 00-0164	MO	Up To 1,000 CFM, Portable Air Scrubber	722.74	
		For >6 Months (>26 Weeks), Deduct	*-28.91*	
01 22 23 00-0165	DAY	>1,000 to 2,000 CFM, Portable Air Scrubber	79.46	
		For Half Day Usage, Deduct	*-24.83*	
01 22 23 00-0166	WK	>1,000 to 2,000 CFM, Portable Air Scrubber	329.21	
01 22 23 00-0167	MO	>1,000 to 2,000 CFM, Portable Air Scrubber	964.92	
		For >6 Months (>26 Weeks), Deduct	*-38.60*	
01 22 23 00-0168	DAY	>2,000 To 5,000 CFM, Portable Air Scrubber	102.17	
		For Half Day Usage, Deduct	*-31.93*	
01 22 23 00-0169	WK	>2,000 To 5,000 CFM, Portable Air Scrubber	435.16	
01 22 23 00-0170	MO	>2,000 To 5,000 CFM, Portable Air Scrubber	1,218.45	
		For >6 Months (>26 Weeks), Deduct	*-48.74*	
01 22 23 00-0171	EA	First Stage Pre-Filter For Portable Air Scrubbers	18.67	
01 22 23 00-0172	EA	Second Stage Pre-Filter For Portable Air Scrubbers	24.73	
01 22 23 00-0173	EA	High Efficiency Particulate Air (HEPA) Filter, 99.99% Efficient At 0.3 Micron For Portable Air Scrubbers	225.28	

01 22 23 00-0174 Compaction And Paving Equipment *(01 22 23)*

01 22 23 00-0175 Pavers And Rollers *(01 22 23 00-0174)*

Note: Includes full-time operator. Excludes delivery, set-up, and removal.

01 22 23 00-0176 Pavers *(01 22 23 00-0175)*

01 22 23 00-0177	DAY	10' Wide Paving Machine With Full-Time Operator	4,471.17	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-1,593.92*	
01 22 23 00-0178	WK	10' Wide Paving Machine With Full-Time Operator	18,933.65	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0179	MO	10' Wide Paving Machine With Full-Time Operator	71,617.08	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-1,955.58*	

01 22 23 00-0180 Ride-On Self-Propelled, Rubber Tire Rollers *(01 22 23 00-0175)*

01 22 23 00-0181	DAY	10 To 12 Ton, Ride-On Self-Propelled, 9 Wheel Rubber-Tire Roller With Full-Time Operator	1,402.23	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-634.88*	
01 22 23 00-0182	WK	10 To 12 Ton, Ride-On Self-Propelled, 9 Wheel Rubber-Tire Roller With Full-Time Operator	6,313.28	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0183	MO	10 To 12 Ton, Ride-On Self-Propelled, 9 Wheel Rubber-Tire Roller With Full-Time Operator	25,628.04	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-116.02*	
01 22 23 00-0184	DAY	15 Ton, Ride-On Self-Propelled, 9 Wheel Rubber-Tire Roller With Full-Time Operator	1,538.57	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-677.49*	
01 22 23 00-0185	WK	15 Ton, Ride-On Self-Propelled, 9 Wheel Rubber-Tire Roller With Full-Time Operator	7,327.19	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0186	MO	15 Ton, Ride-On Self-Propelled, 9 Wheel Rubber-Tire Roller With Full-Time Operator	27,158.82	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-177.25*	
01 22 23 00-0187	DAY	30 Ton, Ride-On Self-Propelled, 11 Wheel Rubber-Tire Roller With Full-Time Operator	1,544.77	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-679.42*	
01 22 23 00-0188	WK	30 Ton, Ride-On Self-Propelled, 11 Wheel Rubber-Tire Roller With Full-Time Operator	6,924.35	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0189	MO	30 Ton, Ride-On Self-Propelled, 11 Wheel Rubber-Tire Roller With Full-Time Operator	27,456.30	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-189.15*	

01 22 23 00-0190 Ride-On Self-Propelled, Padfoot Rollers *(01 22 23 00-0175)*

01 22 23 00-0191	DAY	5 Ton, Single Padfoot Drum, Ride-On Self-Propelled Vibratory Roller With Full-Time Operator	1,458.01	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-652.31*	
01 22 23 00-0192	WK	5 Ton, Single Padfoot Drum, Ride-On Self-Propelled Vibratory Roller With Full-Time Operator	6,378.97	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0193	MO	5 Ton, Single Padfoot Drum, Ride-On Self-Propelled Vibratory Roller With Full-Time Operator	26,006.09	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-131.14*	
01 22 23 00-0194	DAY	8 Ton, Single Padfoot Drum, Ride-On Self-Propelled Vibratory Roller With Full-Time Operator	1,718.30	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-733.65*	
01 22 23 00-0195	WK	8 Ton, Single Padfoot Drum, Ride-On Self-Propelled Vibratory Roller With Full-Time Operator	6,905.76	
		For Equipment Without Operator, Deduct	*-5,244.83*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-0196	MO	8 Ton, Single Padfoot Drum, Ride-On Self-Propelled Vibratory Roller With Full-Time Operator	27,667.02	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-197.58*	
01 22 23 00-0197	DAY	10 To 12 Ton, Single Padfoot Drum, Ride-On Self-Propelled Vibratory Roller With Full-Time Operator	1,780.27	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-753.02*	
01 22 23 00-0198	WK	10 To 12 Ton, Single Padfoot Drum, Ride-On Self-Propelled Vibratory Roller With Full-Time Operator	7,296.20	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0199	MO	10 To 12 Ton, Single Padfoot Drum, Ride-On Self-Propelled Vibratory Roller With Full-Time Operator	28,757.78	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-241.21*	

01 22 23 00-0200 Towed, Padfoot Rollers *(01 22 23 00-0175)*

01 22 23 00-0201	DAY	48" Wide, 40" Diameter, Towed Padfoot Roller	117.75	
		For Half Day Usage, Deduct	*-36.80*	
01 22 23 00-0202	WK	48" Wide, 40" Diameter, Towed Padfoot Roller	340.86	
01 22 23 00-0203	MO	48" Wide, 40" Diameter, Towed Padfoot Roller	1,004.00	
		For >6 Months (>26 Weeks), Deduct	*-40.16*	
01 22 23 00-0204	DAY	60" Wide, 60" Diameter, Towed Padfoot Roller	148.74	
		For Half Day Usage, Deduct	*-46.48*	
01 22 23 00-0205	WK	60" Wide, 60" Diameter, Towed Padfoot Roller	415.23	
01 22 23 00-0206	MO	60" Wide, 60" Diameter, Towed Padfoot Roller	1,766.29	
		For >6 Months (>26 Weeks), Deduct	*-70.65*	

01 22 23 00-0207 Static Rollers *(01 22 23 00-0175)*

01 22 23 00-0208	DAY	5 Ton, 2 Drum Articulated Roller With Full-Time Operator	1,488.99	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-661.99*	
01 22 23 00-0209	WK	5 Ton, 2 Drum Articulated Roller With Full-Time Operator	6,645.47	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0210	MO	5 Ton, 2 Drum Articulated Roller With Full-Time Operator	26,879.93	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-166.09*	
01 22 23 00-0211	DAY	8 To 10 Ton, 2 Drum Articulated Roller With Full-Time Operator	1,625.34	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-704.60*	
01 22 23 00-0212	WK	8 To 10 Ton, 2 Drum Articulated Roller With Full-Time Operator	7,017.31	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0213	MO	8 To 10 Ton, 2 Drum Articulated Roller With Full-Time Operator	27,908.72	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-207.24*	

01 22 23 00-0214 Ride-On Self-Propelled, Smooth Drum Vibratory Rollers *(01 22 23 00-0175)*

01 22 23 00-0215	DAY	1 Ton, Double Smooth Drums, Ride-On Self-Propelled Vibratory Roller With Full-Time Operator	1,290.67	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-600.02*	
01 22 23 00-0216	WK	1 Ton, Double Smooth Drums, Ride-On Self-Propelled Vibratory Roller With Full-Time Operator	5,951.35	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0217	MO	1 Ton, Double Smooth Drums, Ride-On Self-Propelled Vibratory Roller With Full-Time Operator	24,586.86	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-74.37*	
01 22 23 00-0218	DAY	3 Ton, Double Smooth Drums, Ride-On Self-Propelled Vibratory Roller With Full-Time Operator	1,383.63	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-629.07*	
01 22 23 00-0219	WK	3 Ton, Double Smooth Drums, Ride-On Self-Propelled Vibratory Roller With Full-Time Operator	6,230.23	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0220	MO	3 Ton, Double Smooth Drums, Ride-On Self-Propelled Vibratory Roller With Full-Time Operator	25,330.56	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-104.12*	
01 22 23 00-0221	DAY	5 Ton, Single Smooth Drum, Ride-On Self-Propelled Vibratory Roller With Full-Time Operator	1,445.61	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-648.44*	
01 22 23 00-0222	WK	5 Ton, Single Smooth Drum, Ride-On Self-Propelled Vibratory Roller With Full-Time Operator	6,416.16	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0223	MO	5 Ton, Single Smooth Drum, Ride-On Self-Propelled Vibratory Roller With Full-Time Operator	25,826.36	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-123.95*	
01 22 23 00-0224	DAY	8 Ton, Single Smooth Drum, Ride-On Self-Propelled Vibratory Roller With Full-Time Operator	1,526.18	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-673.61*	
01 22 23 00-0225	WK	8 Ton, Single Smooth Drum, Ride-On Self-Propelled Vibratory Roller With Full-Time Operator	6,651.66	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0226	MO	8 Ton, Single Smooth Drum, Ride-On Self-Propelled Vibratory Roller With Full-Time Operator	26,439.91	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-148.49*	
01 22 23 00-0227	DAY	11 To 12 Ton, Single Smooth Drum, Ride-On Self-Propelled Vibratory Roller With Full-Time Operator	1,687.31	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-723.97*	
01 22 23 00-0228	WK	11 To 12 Ton, Single Smooth Drum, Ride-On Self-Propelled Vibratory Roller With Full-Time Operator	7,122.67	
		For Equipment Without Operator, Deduct	*-5,244.83*	

copyright 2026 The Gordian Group, Inc.

		MINOR CSI UOM DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-0229	MO	11 To 12 Ton, Single Smooth Drum, Ride-On Self-Propelled Vibratory Roller With Full-Time Operator	27,685.61	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-198.32*	

01 22 23 00-0230 Steel Roadway Plates *(01 22 23 00-0174)*

Note: 3 day minimum. Excludes delivery to job site and pick-up when complete. See CSI section 01 22 23 00-0231 for for placement (set-up) from truck and removal from ground (load on truck), 01 71 13 00-0001 for material delivery on truck.

01 22 23 00-0231	EA	Placement And Removal Of Steel Roadway Plates	61.87	
01 22 23 00-0232	DAY	1" x 4' x 8' Steel Plate	46.44	
01 22 23 00-0233	WK	1" x 4' x 8' Steel Plate	109.66	
01 22 23 00-0234	MO	1" x 4' x 8' Steel Plate	144.31	
		For >6 Months (>26 Weeks), Deduct	*-5.77*	
01 22 23 00-0235	DAY	1" x 4' x 10' Steel Plate	61.92	
01 22 23 00-0236	WK	1" x 4' x 10' Steel Plate	139.33	
01 22 23 00-0237	MO	1" x 4' x 10' Steel Plate	170.29	
		For >6 Months (>26 Weeks), Deduct	*-6.81*	
01 22 23 00-0238	DAY	1" x 5' x 10' Steel Plate	64.50	
01 22 23 00-0239	WK	1" x 5' x 10' Steel Plate	145.78	
01 22 23 00-0240	MO	1" x 5' x 10' Steel Plate	387.03	
		For >6 Months (>26 Weeks), Deduct	*-15.48*	
01 22 23 00-0241	DAY	1" x 6' x 8' Steel Plate	41.28	
01 22 23 00-0242	WK	1" x 6' x 8' Steel Plate	92.89	
01 22 23 00-0243	MO	1" x 6' x 8' Steel Plate	247.70	
		For >6 Months (>26 Weeks), Deduct	*-9.91*	
01 22 23 00-0244	DAY	1" x 6' x 10' Steel Plate	77.41	
01 22 23 00-0245	WK	1" x 6' x 10' Steel Plate	101.92	
01 22 23 00-0246	MO	1" x 6' x 10' Steel Plate	272.21	
		For >6 Months (>26 Weeks), Deduct	*-10.89*	
01 22 23 00-0247	DAY	1" x 6' x 12' Steel Plate	108.37	
01 22 23 00-0248	WK	1" x 6' x 12' Steel Plate	138.69	
01 22 23 00-0249	MO	1" x 6' x 12' Steel Plate	375.42	
		For >6 Months (>26 Weeks), Deduct	*-15.02*	
01 22 23 00-0250	DAY	1" x 8' x 10' Steel Plate	68.38	
01 22 23 00-0251	WK	1" x 8' x 10' Steel Plate	153.52	
01 22 23 00-0252	MO	1" x 8' x 10' Steel Plate	408.96	
		For >6 Months (>26 Weeks), Deduct	*-16.36*	
01 22 23 00-0253	DAY	1" x 8' x 12' Steel Plate	123.85	
01 22 23 00-0254	WK	1" x 8' x 12' Steel Plate	153.52	
01 22 23 00-0255	MO	1" x 8' x 12' Steel Plate	743.10	
		For >6 Months (>26 Weeks), Deduct	*-29.72*	
01 22 23 00-0256	DAY	1" x 8' x 16' Steel Plate	165.13	
01 22 23 00-0257	WK	1" x 8' x 16' Steel Plate	371.55	
01 22 23 00-0258	MO	1" x 8' x 16' Steel Plate	990.80	
		For >6 Months (>26 Weeks), Deduct	*-39.63*	
01 22 23 00-0259	DAY	1-1/4" x 8' x 10' Steel Plate	82.05	
01 22 23 00-0260	WK	1-1/4" x 8' x 10' Steel Plate	184.23	
01 22 23 00-0261	MO	1-1/4" x 8' x 10' Steel Plate	490.75	
		For >6 Months (>26 Weeks), Deduct	*-19.63*	
01 22 23 00-0262	DAY	1-1/2" x 8' x 15' Steel Plate	189.90	
01 22 23 00-0263	WK	1-1/2" x 8' x 15' Steel Plate	427.28	
01 22 23 00-0264	MO	1-1/2" x 8' x 15' Steel Plate	1,139.42	
		For >6 Months (>26 Weeks), Deduct	*-45.58*	
01 22 23 00-0265	LF	Cold Mix For Temporary Ramp Base, 6" At Edge Of Trench Plate	2.70	1.18
01 22 23 00-0266	EA	Removal And Resetting Of Steel Roadway Plate	34.37	

01 22 23 00-0267 Street Sweepers *(01 22 23 00-0174)*

Note: Includes full-time operator. Excludes delivery, set-up, and removal.

01 22 23 00-0268	DAY	8' Road Broom, Self-Propelled Street Sweeper With Full-Time Operator	1,216.98	
		For Equipment Without Operator, Deduct	*-1,004.52*	
		For Half Day Usage, Deduct	*-568.65*	
01 22 23 00-0269	WK	8' Road Broom, Self-Propelled Street Sweeper With Full-Time Operator	5,864.51	
		For Equipment Without Operator, Deduct	*-5,022.59*	
01 22 23 00-0270	MO	8' Road Broom, Self-Propelled Street Sweeper With Full-Time Operator	24,764.14	
		For Equipment Without Operator, Deduct	*-21,764.55*	
		For >6 Months (>26 Weeks), Deduct	*-119.98*	
01 22 23 00-0271	DAY	Self-Propelled Street Sweeper With Hopper And Full-Time Operator Note: Truck with main and gutter brooms, elevator, debris hopper and water tank.	2,824.58	
		For Equipment Without Operator, Deduct	*-1,004.52*	
		For Half Day Usage, Deduct	*-1,071.03*	
01 22 23 00-0272	WK	Self-Propelled Street Sweeper With Hopper And Full-Time Operator Note: Truck with main and gutter brooms, elevator, debris hopper and water tank.	12,312.86	
		For Equipment Without Operator, Deduct	*-5,022.59*	
01 22 23 00-0273	MO	Self-Propelled Street Sweeper With Hopper And Full-Time Operator Note: Truck with main and gutter brooms, elevator, debris hopper and water tank.	47,781.77	
		For Equipment Without Operator, Deduct	*-21,764.55*	
		For >6 Months (>26 Weeks), Deduct	*-1,040.69*	

01 22 23 00-0274 Concrete Deck Bridge Finishers *(01 22 23 00-0174)*

Note: Includes full-time operator.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-0275	WK	Concrete Bridge Deck Finisher With Full-Time Operator	7,831.40	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0276	MO	Concrete Bridge Deck Finisher With Full-Time Operator	31,981.28	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-370.15*	
01 22 23 00-0277	EA	Concrete Bridge Deck Finisher Delivery, Set-up And Removal	5,196.01	
		For Equipment Without Operator, Deduct	*-5,196.01*	

01 22 23 00-0278 Earthmoving Equipment *(01 22 23)*

01 22 23 00-0279 Skid-Steer Loaders *(01 22 23 00-0278)*

Note: Includes full-time operator and combination bucket and dozer blade attachments. Add extra attachments where necessary. Excludes delivery, set-up, and removal.

01 22 23 00-0280	DAY	700 Lb. Capacity, 36" Wide, Skid-Steer Loader With Full-Time Operator	1,364.12	
		For Equipment Without Operator, Deduct	*-1,004.52*	
		For Half Day Usage, Deduct	*-614.64*	
01 22 23 00-0281	WK	700 Lb. Capacity, 36" Wide, Skid-Steer Loader With Full-Time Operator	5,965.97	
		For Equipment Without Operator, Deduct	*-5,022.59*	
01 22 23 00-0282	MO	700 Lb. Capacity, 36" Wide, Skid-Steer Loader With Full-Time Operator	24,036.50	
		For Equipment Without Operator, Deduct	*-21,764.55*	
		For >6 Months (>26 Weeks), Deduct	*-90.88*	
01 22 23 00-0283	DAY	1,500 To 1,700 Lb. Capacity, 60" Wide, Skid-Steer Loader With Full-Time Operator	1,458.91	
		For Equipment Without Operator, Deduct	*-1,004.52*	
		For Half Day Usage, Deduct	*-644.26*	
01 22 23 00-0284	WK	1,500 To 1,700 Lb. Capacity, 60" Wide, Skid-Steer Loader With Full-Time Operator	6,137.50	
		For Equipment Without Operator, Deduct	*-5,022.59*	
01 22 23 00-0285	MO	1,500 To 1,700 Lb. Capacity, 60" Wide, Skid-Steer Loader With Full-Time Operator	24,412.65	
		For Equipment Without Operator, Deduct	*-21,764.55*	
		For >6 Months (>26 Weeks), Deduct	*-105.92*	
01 22 23 00-0286	DAY	2,000 To 2,400 Lb. Capacity, 72" Wide, Skid-Steer Loader With Full-Time Operator	1,485.99	
		For Equipment Without Operator, Deduct	*-1,004.52*	
		For Half Day Usage, Deduct	*-652.72*	
01 22 23 00-0287	WK	2,000 To 2,400 Lb. Capacity, 72" Wide, Skid-Steer Loader With Full-Time Operator	6,384.25	
		For Equipment Without Operator, Deduct	*-5,022.59*	
01 22 23 00-0288	MO	2,000 To 2,400 Lb. Capacity, 72" Wide, Skid-Steer Loader With Full-Time Operator	25,067.15	
		For Equipment Without Operator, Deduct	*-21,764.55*	
		For >6 Months (>26 Weeks), Deduct	*-132.10*	
01 22 23 00-0289	DAY	2,500 To 2,700 Lb. Capacity, 78" Wide, Tracked Skid-Steer Loader With Full-Time Operator	1,591.31	
		For Equipment Without Operator, Deduct	*-1,004.52*	
		For Half Day Usage, Deduct	*-685.63*	
01 22 23 00-0290	WK	2,500 To 2,700 Lb. Capacity, 78" Wide, Tracked Skid-Steer Loader With Full-Time Operator	6,730.31	
		For Equipment Without Operator, Deduct	*-5,022.59*	
01 22 23 00-0291	MO	2,500 To 2,700 Lb. Capacity, 78" Wide, Tracked Skid-Steer Loader With Full-Time Operator	26,210.64	
		For Equipment Without Operator, Deduct	*-21,764.55*	
		For >6 Months (>26 Weeks), Deduct	*-177.84*	
01 22 23 00-0292	DAY	3,200 To 3,500 Lb. Capacity, 78" Wide, Tracked Skid-Steer Loader With Full-Time Operator	1,771.87	
		For Equipment Without Operator, Deduct	*-1,004.52*	
		For Half Day Usage, Deduct	*-742.06*	
01 22 23 00-0293	WK	3,200 To 3,500 Lb. Capacity, 78" Wide, Tracked Skid-Steer Loader With Full-Time Operator	7,414.90	
		For Equipment Without Operator, Deduct	*-5,022.59*	
01 22 23 00-0294	MO	3,200 To 3,500 Lb. Capacity, 78" Wide, Tracked Skid-Steer Loader With Full-Time Operator	27,895.79	
		For Equipment Without Operator, Deduct	*-21,764.55*	
		For >6 Months (>26 Weeks), Deduct	*-245.25*	
01 22 23 00-0295	DAY	Hydraulic Hammer Attachment For Skid-Steer Loaders	300.92	
		For Half Day Usage, Deduct	*-94.04*	
01 22 23 00-0296	WK	Hydraulic Hammer Attachment For Skid-Steer Loaders	1,000.56	
01 22 23 00-0297	MO	Hydraulic Hammer Attachment For Skid-Steer Loaders	2,663.14	
		For >6 Months (>26 Weeks), Deduct	*-106.53*	
01 22 23 00-0298	DAY	Forklift Attachment For Skid-Steer Loaders	64.70	
		For Half Day Usage, Deduct	*-20.22*	
01 22 23 00-0299	WK	Forklift Attachment For Skid-Steer Loaders	173.03	
01 22 23 00-0300	MO	Forklift Attachment For Skid-Steer Loaders	489.00	
		For >6 Months (>26 Weeks), Deduct	*-19.56*	
01 22 23 00-0301	DAY	Backhoe Attachment For Skid-Steer Loaders	142.94	
		For Half Day Usage, Deduct	*-44.67*	
01 22 23 00-0302	WK	Backhoe Attachment For Skid-Steer Loaders	343.05	
01 22 23 00-0303	MO	Backhoe Attachment For Skid-Steer Loaders	853.11	
		For >6 Months (>26 Weeks), Deduct	*-34.12*	
01 22 23 00-0304	DAY	Broom Attachment For Skid-Steer Loaders	141.43	
		For Half Day Usage, Deduct	*-44.20*	
01 22 23 00-0305	WK	Broom Attachment For Skid-Steer Loaders	383.67	
01 22 23 00-0306	MO	Broom Attachment For Skid-Steer Loaders	1,015.60	
		For >6 Months (>26 Weeks), Deduct	*-40.62*	
01 22 23 00-0307	DAY	Concrete Pump Attachment For Skid-Steer Loaders	300.92	
		For Half Day Usage, Deduct	*-94.04*	
01 22 23 00-0308	WK	Concrete Pump Attachment For Skid-Steer Loaders	1,000.56	
01 22 23 00-0309	MO	Concrete Pump Attachment For Skid-Steer Loaders	2,663.14	
		For >6 Months (>26 Weeks), Deduct	*-106.53*	
01 22 23 00-0310	DAY	Auger Attachment For Skid-Steer Loaders Note: Excludes bits and extensions	123.38	
		For Half Day Usage, Deduct	*-38.56*	
01 22 23 00-0311	WK	Auger Attachment For Skid-Steer Loaders Note: Excludes bits and extensions	340.04	

copyright 2026 The Gordian Group, Inc.

	MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-0312		MO	Auger Attachment For Skid-Steer Loaders Note: Excludes bits and extensions	928.34	
			For >6 Months (>26 Weeks), Deduct	*-37.13*	
01 22 23 00-0313		DAY	Up To 18" Diameter, 4' Length, Auger Bit For Skid-Steer Mounted Augers Note: Excludes auger attachment	34.00	
			For Half Day Usage, Deduct	*-10.63*	
01 22 23 00-0314		WK	Up To 18" Diameter, 4' Length, Auger Bit For Skid-Steer Mounted Augers Note: Excludes auger attachment	88.97	
01 22 23 00-0315		MO	Up To 18" Diameter, 4' Length, Auger Bit For Skid-Steer Mounted Augers Note: Excludes auger attachment	261.66	
			For >6 Months (>26 Weeks), Deduct	*-10.47*	
01 22 23 00-0316		DAY	>18" To 48" Diameter, 4' Length, Auger Bit For Skid-Steer Mounted Augers Note: Excludes auger attachment	45.78	
			For Half Day Usage, Deduct	*-14.31*	
01 22 23 00-0317		WK	>18" To 48" Diameter, 4' Length, Auger Bit For Skid-Steer Mounted Augers Note: Excludes auger attachment	113.82	
01 22 23 00-0318		MO	>18" To 48" Diameter, 4' Length, Auger Bit For Skid-Steer Mounted Augers Note: Excludes auger attachment	340.18	
			For >6 Months (>26 Weeks), Deduct	*-13.61*	
01 22 23 00-0319		DAY	Up To 24" Diameter, 4' Length, Rock Tip Auger Bit For Skid-Steer Mounted Augers Note: Excludes auger attachment	66.71	
			For Half Day Usage, Deduct	*-20.85*	
01 22 23 00-0320		WK	Up To 24" Diameter, 4' Length, Rock Tip Auger Bit For Skid-Steer Mounted Augers Note: Excludes auger attachment	202.80	
01 22 23 00-0321		MO	Up To 24" Diameter, 4' Length, Rock Tip Auger Bit For Skid-Steer Mounted Augers Note: Excludes auger attachment	601.84	
			For >6 Months (>26 Weeks), Deduct	*-24.07*	
01 22 23 00-0322		DAY	2' Length, Auger Bit Extension For Skid-Steer Mounted Augers Note: Excludes auger attachment	13.54	
			For Half Day Usage, Deduct	*-4.23*	
01 22 23 00-0323		WK	2' Length, Auger Bit Extension For Skid-Steer Mounted Augers Note: Excludes auger attachment	31.60	
01 22 23 00-0324		MO	2' Length, Auger Bit Extension For Skid-Steer Mounted Augers Note: Excludes auger attachment	84.26	
			For >6 Months (>26 Weeks), Deduct	*-3.37*	

01 22 23 00-0325 Bulldozers *(01 22 23 00-0278)*

Note: Includes full-time operator. Excludes delivery, set-up, and removal.

01 22 23 00-0326		DAY	70 HP, D3 Bulldozer With Full-Time Operator	1,455.00	
			For Equipment Without Operator, Deduct	*-1,048.97*	
			For Half Day Usage, Deduct	*-651.37*	
01 22 23 00-0327		WK	70 HP, D3 Bulldozer With Full-Time Operator	6,845.98	
			For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0328		MO	70 HP, D3 Bulldozer With Full-Time Operator	27,477.43	
			For Equipment Without Operator, Deduct	*-22,727.61*	
			For >6 Months (>26 Weeks), Deduct	*-189.99*	
01 22 23 00-0329		DAY	90 To 105 HP, D4 Or D5 Bulldozer With Full-Time Operator	1,646.53	
			For Equipment Without Operator, Deduct	*-1,048.97*	
			For Half Day Usage, Deduct	*-711.22*	
01 22 23 00-0330		WK	90 To 105 HP, D4 Or D5 Bulldozer With Full-Time Operator	7,619.74	
			For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0331		MO	90 To 105 HP, D4 Or D5 Bulldozer With Full-Time Operator	29,852.34	
			For Equipment Without Operator, Deduct	*-22,727.61*	
			For >6 Months (>26 Weeks), Deduct	*-284.99*	
01 22 23 00-0332		DAY	140 HP, D6 Bulldozer With Full-Time Operator	2,190.46	
			For Equipment Without Operator, Deduct	*-1,048.97*	
			For Half Day Usage, Deduct	*-881.20*	
01 22 23 00-0333		WK	140 HP, D6 Bulldozer With Full-Time Operator	9,795.46	
			For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0334		MO	140 HP, D6 Bulldozer With Full-Time Operator	36,364.19	
			For Equipment Without Operator, Deduct	*-22,727.61*	
			For >6 Months (>26 Weeks), Deduct	*-545.46*	
01 22 23 00-0335		DAY	200 HP, D7 Bulldozer With Full-Time Operator	2,673.10	
			For Equipment Without Operator, Deduct	*-1,048.97*	
			For Half Day Usage, Deduct	*-1,032.03*	
01 22 23 00-0336		WK	200 HP, D7 Bulldozer With Full-Time Operator	11,733.70	
			For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0337		MO	200 HP, D7 Bulldozer With Full-Time Operator	42,186.55	
			For Equipment Without Operator, Deduct	*-22,727.61*	
			For >6 Months (>26 Weeks), Deduct	*-778.36*	
01 22 23 00-0338		DAY	335 HP, D8 Bulldozer With Full-Time Operator	3,247.68	
			For Equipment Without Operator, Deduct	*-1,048.97*	
			For Half Day Usage, Deduct	*-1,211.58*	
01 22 23 00-0339		WK	335 HP, D8 Bulldozer With Full-Time Operator	14,032.00	
			For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0340		MO	335 HP, D8 Bulldozer With Full-Time Operator	49,081.45	
			For Equipment Without Operator, Deduct	*-22,727.61*	
			For >6 Months (>26 Weeks), Deduct	*-1,054.15*	
01 22 23 00-0341		DAY	460 HP, D9 Bulldozer With Full-Time Operator	3,569.44	
			For Equipment Without Operator, Deduct	*-1,048.97*	
			For Half Day Usage, Deduct	*-1,312.13*	
01 22 23 00-0342		WK	460 HP, D9 Bulldozer With Full-Time Operator	15,311.38	
			For Equipment Without Operator, Deduct	*-5,244.83*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-0343	MO	460 HP, D9 Bulldozer With Full-Time Operator	52,911.95	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-1,207.37*	

01 22 23 00-0344 Trail Dozer *(01 22 23 00-0278)*

Note: Includes full-time operator. Excludes delivery, set-up, and removal.

01 22 23 00-0345	DAY	48" Width Trail Dozer With Full-Time Operator	1,666.93	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-717.60*	
01 22 23 00-0346	WK	48" Width Trail Dozer With Full-Time Operator	7,192.76	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0347	MO	48" Width Trail Dozer With Full-Time Operator	27,684.76	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-198.29*	

01 22 23 00-0348 Motor Scraper *(01 22 23 00-0278)*

Note: Includes full-time operator. Excludes delivery, set-up, and removal.

01 22 23 00-0349	DAY	11 CY Motor Scraper-Hauler With Full-Time Operator	2,348.44	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-930.57*	
01 22 23 00-0350	WK	11 CY Motor Scraper-Hauler With Full-Time Operator	10,442.72	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0351	MO	11 CY Motor Scraper-Hauler With Full-Time Operator	38,303.49	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-623.04*	
01 22 23 00-0352	DAY	18 CY Motor Scraper-Hauler With Full-Time Operator	2,873.57	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-1,094.67*	
01 22 23 00-0353	WK	18 CY Motor Scraper-Hauler With Full-Time Operator	12,543.24	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0354	MO	18 CY Motor Scraper-Hauler With Full-Time Operator	44,622.84	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-875.81*	
01 22 23 00-0355	DAY	24 CY Motor Scraper-Hauler With Full-Time Operator	3,380.90	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-1,253.21*	
01 22 23 00-0356	WK	24 CY Motor Scraper-Hauler With Full-Time Operator	14,563.65	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0357	MO	24 CY Motor Scraper-Hauler With Full-Time Operator	50,675.18	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-1,117.90*	

01 22 23 00-0358 Hydraulic Excavators *(01 22 23 00-0278)*

Note: Includes full-time operator. Excludes delivery, set-up, and removal.

01 22 23 00-0359	DAY	3/8 CY Hydraulic Excavator With Full-Time Operator	1,411.69	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-637.84*	
01 22 23 00-0360	WK	3/8 CY Hydraulic Excavator With Full-Time Operator	6,527.78	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0361	MO	3/8 CY Hydraulic Excavator With Full-Time Operator	27,026.49	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-171.96*	
01 22 23 00-0362	DAY	1/2 CY Hydraulic Excavator With Full-Time Operator	1,513.79	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-669.74*	
01 22 23 00-0363	WK	1/2 CY Hydraulic Excavator With Full-Time Operator	6,977.82	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0364	MO	1/2 CY Hydraulic Excavator With Full-Time Operator	28,826.65	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-243.96*	
01 22 23 00-0365	DAY	5/8 CY Hydraulic Excavator With Full-Time Operator	1,546.03	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-679.82*	
01 22 23 00-0366	WK	5/8 CY Hydraulic Excavator With Full-Time Operator	7,145.74	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0367	MO	5/8 CY Hydraulic Excavator With Full-Time Operator	29,122.19	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-255.78*	
01 22 23 00-0368	DAY	3/4 CY Hydraulic Excavator With Full-Time Operator	1,579.61	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-690.31*	
01 22 23 00-0369	WK	3/4 CY Hydraulic Excavator With Full-Time Operator	7,300.23	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0370	MO	3/4 CY Hydraulic Excavator With Full-Time Operator	29,417.74	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-267.61*	
01 22 23 00-0371	DAY	7/8 To 1 CY Hydraulic Excavator With Full-Time Operator	1,606.48	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-698.71*	
01 22 23 00-0372	WK	7/8 To 1 CY Hydraulic Excavator With Full-Time Operator	7,461.44	
		For Equipment Without Operator, Deduct	*-5,244.83*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-0373	MO	7/8 To 1 CY Hydraulic Excavator With Full-Time Operator	29,713.29	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-279.43*	
01 22 23 00-0374	DAY	1-1/8 To 1-1/4 CY Hydraulic Excavator With Full-Time Operator	1,969.20	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-812.06*	
01 22 23 00-0375	WK	1-1/8 To 1-1/4 CY Hydraulic Excavator With Full-Time Operator	8,905.59	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0376	MO	1-1/8 To 1-1/4 CY Hydraulic Excavator With Full-Time Operator	33,709.91	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-439.29*	
01 22 23 00-0377	DAY	1-3/8 To 1-1/2 CY Hydraulic Excavator With Full-Time Operator	2,022.93	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-828.85*	
01 22 23 00-0378	WK	1-3/8 To 1-1/2 CY Hydraulic Excavator With Full-Time Operator	9,140.69	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0379	MO	1-3/8 To 1-1/2 CY Hydraulic Excavator With Full-Time Operator	34,415.19	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-467.50*	
01 22 23 00-0380	DAY	1-5/8 To 1-7/8 CY Hydraulic Excavator With Full-Time Operator	2,123.69	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-860.34*	
01 22 23 00-0381	WK	1-5/8 To 1-7/8 CY Hydraulic Excavator With Full-Time Operator	9,543.71	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0382	MO	1-5/8 To 1-7/8 CY Hydraulic Excavator With Full-Time Operator	35,624.25	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-515.87*	
01 22 23 00-0383	DAY	2 To 2-3/8 CY Hydraulic Excavator With Full-Time Operator	2,237.88	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-896.02*	
01 22 23 00-0384	WK	2 To 2-3/8 CY Hydraulic Excavator With Full-Time Operator	9,993.75	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0385	MO	2 To 2-3/8 CY Hydraulic Excavator With Full-Time Operator	36,967.65	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-569.60*	
01 22 23 00-0386	DAY	2-1/2 To 2-7/8 CY Hydraulic Excavator With Full-Time Operator	2,271.46	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-906.51*	
01 22 23 00-0387	WK	2-1/2 To 2-7/8 CY Hydraulic Excavator With Full-Time Operator	10,128.09	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0388	MO	2-1/2 To 2-7/8 CY Hydraulic Excavator With Full-Time Operator	37,370.67	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-585.72*	
01 22 23 00-0389	DAY	3 To 3-3/4 CY Hydraulic Excavator With Full-Time Operator	2,593.88	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-1,007.27*	
01 22 23 00-0390	WK	3 To 3-3/4 CY Hydraulic Excavator With Full-Time Operator	11,424.47	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0391	MO	3 To 3-3/4 CY Hydraulic Excavator With Full-Time Operator	41,266.53	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-741.56*	
01 22 23 00-0392	DAY	4 To 5-3/4 CY Hydraulic Excavator With Full-Time Operator	3,057.35	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-1,152.10*	
01 22 23 00-0393	WK	4 To 5-3/4 CY Hydraulic Excavator With Full-Time Operator	13,264.93	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0394	MO	4 To 5-3/4 CY Hydraulic Excavator With Full-Time Operator	46,774.47	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-961.87*	
01 22 23 00-0395	DAY	6 To 11 CY Hydraulic Excavator With Full-Time Operator	3,628.30	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-1,330.53*	
01 22 23 00-0396	WK	6 To 11 CY Hydraulic Excavator With Full-Time Operator	15,548.71	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0397	MO	6 To 11 CY Hydraulic Excavator With Full-Time Operator	53,625.81	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-1,235.93*	
01 22 23 00-0398	DAY	Up To 50' Depth, 50,000 Lb. Operating Weight, Long-Arm Hydraulic Excavator With Full-Time Operator	2,150.56	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-868.73*	
01 22 23 00-0399	WK	Up To 50' Depth, 50,000 Lb. Operating Weight, Long-Arm Hydraulic Excavator With Full-Time Operator	9,637.75	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0400	MO	Up To 50' Depth, 50,000 Lb. Operating Weight, Long-Arm Hydraulic Excavator With Full-Time Operator	35,892.93	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-526.61*	
01 22 23 00-0401	DAY	Thumbs Or Grapple Attachment For Hydraulic Excavators	94.04	
		For Half Day Usage, Deduct	*-29.39*	
01 22 23 00-0402	WK	Thumbs Or Grapple Attachment For Hydraulic Excavators	362.72	
01 22 23 00-0403	MO	Thumbs Or Grapple Attachment For Hydraulic Excavators	1,074.72	
		For >6 Months (>26 Weeks), Deduct	*-42.99*	
01 22 23 00-0404	DAY	1,000 FT-Lb. Hydraulic Hammer Attachment For Hydraulic Excavators	416.45	
		For Half Day Usage, Deduct	*-130.14*	
01 22 23 00-0405	WK	1,000 FT-Lb. Hydraulic Hammer Attachment For Hydraulic Excavators	1,101.59	
01 22 23 00-0406	MO	1,000 FT-Lb. Hydraulic Hammer Attachment For Hydraulic Excavators	3,083.10	
		For >6 Months (>26 Weeks), Deduct	*-123.32*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-0407	DAY	1,500 FT-Lb. Hydraulic Hammer Attachment For Hydraulic Excavators	644.83	
		For Half Day Usage, Deduct	*-201.51*	
01 22 23 00-0408	WK	1,500 FT-Lb. Hydraulic Hammer Attachment For Hydraulic Excavators	1,645.66	
01 22 23 00-0409	MO	1,500 FT-Lb. Hydraulic Hammer Attachment For Hydraulic Excavators	4,278.73	
		For >6 Months (>26 Weeks), Deduct	*-171.15*	
01 22 23 00-0410	DAY	3,000 FT-Lb. Hydraulic Hammer Attachment For Hydraulic Excavators	900.08	
		For Half Day Usage, Deduct	*-281.28*	
01 22 23 00-0411	WK	3,000 FT-Lb. Hydraulic Hammer Attachment For Hydraulic Excavators	2,424.84	
01 22 23 00-0412	MO	3,000 FT-Lb. Hydraulic Hammer Attachment For Hydraulic Excavators	6,797.60	
		For >6 Months (>26 Weeks), Deduct	*-271.90*	
01 22 23 00-0413	DAY	24" Compaction Wheel Attachment For Hydraulic Excavators	188.08	
		For Half Day Usage, Deduct	*-58.78*	
01 22 23 00-0414	WK	24" Compaction Wheel Attachment For Hydraulic Excavators	752.30	
01 22 23 00-0415	MO	24" Compaction Wheel Attachment For Hydraulic Excavators	2,256.91	
		For >6 Months (>26 Weeks), Deduct	*-90.28*	
01 22 23 00-0416	DAY	36" Compaction Wheel Attachment For Hydraulic Excavators	268.68	
		For Half Day Usage, Deduct	*-83.96*	
01 22 23 00-0417	WK	36" Compaction Wheel Attachment For Hydraulic Excavators	1,074.72	
01 22 23 00-0418	MO	36" Compaction Wheel Attachment For Hydraulic Excavators	3,224.16	
		For >6 Months (>26 Weeks), Deduct	*-128.97*	
01 22 23 00-0419	DAY	48" Compaction Wheel Attachment For Hydraulic Excavators	295.55	
		For Half Day Usage, Deduct	*-92.36*	
01 22 23 00-0420	WK	48" Compaction Wheel Attachment For Hydraulic Excavators	1,168.76	
01 22 23 00-0421	MO	48" Compaction Wheel Attachment For Hydraulic Excavators	3,492.84	
		For >6 Months (>26 Weeks), Deduct	*-139.71*	

01 22 23 00-0422 Mini-Excavators *(01 22 23 00-0278)*

Note: Includes full-time operator. Excludes delivery, set-up, and removal.

01 22 23 00-0423	DAY	2,000 Lb. Capacity, Mini-Excavator With Full-Time Operator	1,331.08	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-612.64*	
01 22 23 00-0424	WK	2,000 Lb. Capacity, Mini-Excavator With Full-Time Operator	6,044.15	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0425	MO	2,000 Lb. Capacity, Capacity, Mini-Excavator With Full-Time Operator	24,487.46	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-70.39*	
01 22 23 00-0426	DAY	3,500 Lb. Capacity, Mini-Excavator With Full-Time Operator	1,337.80	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-614.74*	
01 22 23 00-0427	WK	3,500 Lb. Capacity, Mini-Excavator With Full-Time Operator	6,064.30	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0428	MO	3,500 Lb. Capacity, Mini-Excavator With Full-Time Operator	24,910.63	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-87.32*	
01 22 23 00-0429	DAY	6,000 Lb. Capacity, Mini-Excavator With Full-Time Operator	1,371.39	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-625.24*	
01 22 23 00-0430	WK	6,000 Lb. Capacity, Mini-Excavator With Full-Time Operator	6,158.34	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0431	MO	6,000 Lb. Capacity, Mini-Excavator With Full-Time Operator	24,971.09	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-89.74*	
01 22 23 00-0432	DAY	7,500 Lb. Capacity, Mini-Excavator With Full-Time Operator	1,384.82	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-629.44*	
01 22 23 00-0433	WK	7,500 Lb. Capacity, Mini-Excavator With Full-Time Operator	6,205.36	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0434	MO	7,500 Lb. Capacity, Mini-Excavator With Full-Time Operator	24,997.96	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-90.81*	
01 22 23 00-0435	DAY	9,500 Lb. Capacity, Mini-Excavator With Full-Time Operator	1,465.42	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-654.63*	
01 22 23 00-0436	WK	9,500 Lb. Capacity, Mini-Excavator With Full-Time Operator	6,272.53	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0437	MO	9,500 Lb. Capacity, Mini-Excavator With Full-Time Operator	25,777.13	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-121.98*	
01 22 23 00-0438	DAY	11,000 Lb. Capacity, Mini-Excavator With Full-Time Operator	1,472.14	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-656.73*	
01 22 23 00-0439	WK	11,000 Lb. Capacity, Mini-Excavator With Full-Time Operator	6,608.38	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0440	MO	11,000 Lb. Capacity, Mini-Excavator With Full-Time Operator	25,810.71	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-123.32*	

01 22 23 00-0441 Road Graders *(01 22 23 00-0278)*

Note: Includes full-time operator. Excludes delivery, set-up, and removal.

01 22 23 00-0442	DAY	50 To 60 HP Road Grader With Full-Time Operator	2,384.05	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-941.70*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-0443	WK	50 To 60 HP Road Grader With Full-Time Operator	8,716.03	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0444	MO	50 To 60 HP Road Grader With Full-Time Operator	32,073.13	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-373.82*	
01 22 23 00-0445	DAY	80 To 100 HP Road Grader With Full-Time Operator	3,042.68	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-1,147.52*	
01 22 23 00-0446	WK	80 To 100 HP Road Grader With Full-Time Operator	10,175.71	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0447	MO	80 To 100 HP Road Grader With Full-Time Operator	36,523.39	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-551.83*	
01 22 23 00-0448	DAY	130 To 140 HP Road Grader With Full-Time Operator	3,533.69	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-1,300.96*	
01 22 23 00-0449	WK	130 To 140 HP Road Grader With Full-Time Operator	11,630.05	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0450	MO	130 To 140 HP Road Grader With Full-Time Operator	41,885.94	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-766.33*	
01 22 23 00-0451	DAY	170 To 185 HP Road Grader With Full-Time Operator	4,279.85	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-1,534.14*	
01 22 23 00-0452	WK	170 To 185 HP Road Grader With Full-Time Operator	18,168.36	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0453	MO	170 To 185 HP Road Grader With Full-Time Operator	67,959.91	
		For Equipment Without Operator, Deduct	*-22,727.57*	
		For >6 Months (>26 Weeks), Deduct	*-1,809.29*	

01 22 23 00-0454 Loader-Backhoes With Standard Bucket *(01 22 23 00-0278)*

Note: Includes full-time operator. Excludes delivery, set-up, and removal.

01 22 23 00-0455	DAY	1/2 To 5/8 CY, 65 HP, Loader-Backhoe With Standard Bucket And Full-Time Operator	1,502.77	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-666.30*	
01 22 23 00-0456	WK	1/2 To 5/8 CY, 65 HP, Loader-Backhoe With Standard Bucket And Full-Time Operator	6,322.60	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0457	MO	1/2 To 5/8 CY, 65 HP, Loader-Backhoe With Standard Bucket And Full-Time Operator	25,264.01	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-101.46*	
01 22 23 00-0458	DAY	1 CY, 24" Bucket, 14'-4" Deep, 75 HP, Loader-Backhoe With Full-Time Operator	1,551.39	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-681.49*	
01 22 23 00-0459	WK	1 CY, 24" Bucket, 14'-4" Deep, 75 HP, Loader-Backhoe With Full-Time Operator	6,492.77	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0460	MO	1 CY, 24" Bucket, 14'-4" Deep, 75 HP, Loader-Backhoe With Full-Time Operator	26,301.25	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-142.95*	
01 22 23 00-0461	DAY	1-1/2 CY, 24" Bucket, 16'-6" Deep, 90 HP, Loader-Backhoe With Full-Time Operator	1,626.34	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-704.91*	
01 22 23 00-0462	WK	1-1/2 CY, 24" Bucket, 16'-6" Deep, 90 HP, Loader-Backhoe With Full-Time Operator	6,679.15	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0463	MO	1-1/2 CY, 24" Bucket, 16'-6" Deep, 90 HP, Loader-Backhoe With Full-Time Operator	26,836.08	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-164.34*	
01 22 23 00-0464	DAY	1-3/4 CY, 30" Bucket, 18'-0" Deep, 112 HP, Loader-Backhoe With Full-Time Operator	1,960.61	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-809.37*	
01 22 23 00-0465	WK	1-3/4 CY, 30" Bucket, 18'-0" Deep, 112 HP, Loader-Backhoe With Full-Time Operator	7,675.88	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0466	MO	1-3/4 CY, 30" Bucket, 18'-0" Deep, 112 HP, Loader-Backhoe With Full-Time Operator	29,688.52	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-278.44*	

01 22 23 00-0467 Heavy-Duty Construction Loaders *(01 22 23 00-0278)*

Note: Includes full-time operator. Excludes delivery, set-up, and removal.

01 22 23 00-0468	DAY	2-1/2 CY, 119 HP, Heavy-Duty Construction Loader With Full-Time Operator	1,498.87	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-665.08*	
01 22 23 00-0469	WK	2-1/2 CY, 119 HP, Heavy-Duty Construction Loader With Full-Time Operator	7,023.66	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0470	MO	2-1/2 CY, 119 HP, Heavy-Duty Construction Loader With Full-Time Operator	28,057.17	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-213.18*	
01 22 23 00-0471	DAY	3 CY, 135 HP, Heavy-Duty Construction Loader With Full-Time Operator	1,872.63	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-781.88*	
01 22 23 00-0472	WK	3 CY, 135 HP, Heavy-Duty Construction Loader With Full-Time Operator	7,432.02	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0473	MO	3 CY, 135 HP, Heavy-Duty Construction Loader With Full-Time Operator	28,264.81	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-221.49*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-0474	DAY	3-1/2 CY, 198 HP, Heavy-Duty Construction Loader With Full-Time Operator	1,955.69	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-807.84*	
01 22 23 00-0475	WK	3-1/2 CY, 198 HP, Heavy-Duty Construction Loader With Full-Time Operator	7,653.51	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0476	MO	3-1/2 CY, 198 HP, Heavy-Duty Construction Loader With Full-Time Operator	28,818.53	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-243.64*	
01 22 23 00-0477	DAY	4-1/2 CY, 215 HP, Heavy-Duty Construction Loader With Full-Time Operator	2,184.10	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-879.21*	
01 22 23 00-0478	WK	4-1/2 CY, 215 HP, Heavy-Duty Construction Loader With Full-Time Operator	8,255.68	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0479	MO	4-1/2 CY, 215 HP, Heavy-Duty Construction Loader With Full-Time Operator	30,341.26	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-304.55*	
01 22 23 00-0480	DAY	7-1/3 CY, 330 HP, Heavy-Duty Construction Loader With Full-Time Operator	2,772.42	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-1,063.06*	
01 22 23 00-0481	WK	7-1/3 CY, 330 HP, Heavy-Duty Construction Loader With Full-Time Operator	12,124.80	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0482	MO	7-1/3 CY, 330 HP, Heavy-Duty Construction Loader With Full-Time Operator	43,353.68	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-825.04*	
01 22 23 00-0483	DAY	13-1/2 CY, 690 HP, Heavy-Duty Construction Loader With Full-Time Operator	6,648.39	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Half Day Usage, Deduct	*-2,274.30*	
01 22 23 00-0484	WK	13-1/2 CY, 690 HP, Heavy-Duty Construction Loader With Full-Time Operator	23,427.42	
		For Equipment Without Operator, Deduct	*-5,244.83*	
01 22 23 00-0485	MO	13-1/2 CY, 690 HP, Heavy-Duty Construction Loader With Full-Time Operator	72,280.08	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For >6 Months (>26 Weeks), Deduct	*-1,982.10*	

01 22 23 00-0486 Telescopic Hydraulic Excavators (Gradall) *(01 22 23 00-0278)*

Note: Includes full-time operator. Excludes delivery, set-up, and removal.

01 22 23 00-0487	DAY	Gradall, Telescopic Hydraulic Excavator With Full-Time Operator	4,426.62	
		For Equipment Without Operator, Deduct	*-1,048.97*	
		For Track Gradall, Add	*405.32*	
		For Half Day Usage, Deduct	*-1,580.00*	
01 22 23 00-0488	WK	Gradall, Telescopic Hydraulic Excavator With Full-Time Operator	13,183.38	
		For Equipment Without Operator, Deduct	*-5,244.83*	
		For Track Gradall, Add	*952.63*	
01 22 23 00-0489	MO	Gradall, Telescopic Hydraulic Excavator With Full-Time Operator	51,061.43	
		For Equipment Without Operator, Deduct	*-22,727.61*	
		For Track Gradall, Add	*3,400.06*	
		For >6 Months (>26 Weeks), Deduct	*-1,133.35*	

01 22 23 00-0490 Shoring *(01 22 23 00-0278)*

Note: Includes delivery to job site and pick-up when complete.

01 22 23 00-0491 Aluminum Hydraulic Shoring *(01 22 23 00-0490)*

Note: Includes delivery to job site and pick-up when complete. Excludes sheeting.

01 22 23 00-0492	WK	2' Rails, 1 Cylinder, Aluminum Hydraulic Shoring Note: Up to 88" spread width.	157.07	
01 22 23 00-0493	MO	2' Rails, 1 Cylinder, Aluminum Hydraulic Shoring Note: Up to 88" spread width.	463.29	
		For >6 Months (>26 Weeks), Deduct	*-18.53*	
01 22 23 00-0494	WK	Up To 12' Rails, 2 Cylinders, Aluminum Hydraulic Shoring Note: Up to 88" spread width.	210.71	
01 22 23 00-0495	MO	Up To 12' Rails, 2 Cylinders, Aluminum Hydraulic Shoring Note: Up to 88" spread width.	621.49	
		For >6 Months (>26 Weeks), Deduct	*-24.86*	
01 22 23 00-0496	WK	Up To 16' Rails, 3 Cylinders, Aluminum Hydraulic Shoring Note: Up to 88" spread width.	390.70	
01 22 23 00-0497	MO	Up To 16' Rails, 3 Cylinders, Aluminum Hydraulic Shoring Note: Up to 88" spread width.	1,152.57	
		For >6 Months (>26 Weeks), Deduct	*-46.10*	
01 22 23 00-0498	EA	Set-up And Removal Of 1 Cylinder Aluminum Hydraulic Shores	29.97	
01 22 23 00-0499	EA	Set-up And Removal Of 2 Cylinders Aluminum Hydraulic Shores	47.96	
01 22 23 00-0500	EA	Set-up And Removal Of 3 Cylinders Aluminum Hydraulic Shores	79.92	

01 22 23 00-0501 Slide Rail Shoring *(01 22 23 00-0490)*

Note: Excludes delivery to job site and pick-up when complete.

01 22 23 00-0502	WK	4' x 12' Slide Rail Panel	235.83	
01 22 23 00-0503	MO	4' x 12' Slide Rail Panel	707.49	
01 22 23 00-0504	WK	8' x 12' Slide Rail Panel	385.34	
01 22 23 00-0505	MO	8' x 12' Slide Rail Panel	1,156.02	
01 22 23 00-0506	WK	4' x 16' Slide Rail Panel	307.53	
01 22 23 00-0507	MO	4' x 16' Slide Rail Panel	922.59	
01 22 23 00-0508	WK	8' x 16' Slide Rail Panel	503.20	
01 22 23 00-0509	MO	8' x 16' Slide Rail Panel	1,509.61	
01 22 23 00-0510	WK	4' x 20' Slide Rail Panel	394.55	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-0511	MO	4' x 20' Slide Rail Panel	1,183.65	
01 22 23 00-0512	WK	8' x 20' Slide Rail Panel	694.97	
01 22 23 00-0513	MO	8' x 20' Slide Rail Panel	2,084.91	
01 22 23 00-0514	WK	14' Stacking Post	352.49	
01 22 23 00-0515	MO	14' Stacking Post	1,057.48	
01 22 23 00-0516	WK	Stacking Brackets	11.02	
01 22 23 00-0517	MO	Stacking Brackets	33.05	
01 22 23 00-0518	EA	Set Up And Remove 4' x 12' Slide Rail Panel	274.99	
01 22 23 00-0519	EA	Set Up And Remove 8' x 12' Slide Rail Panel	412.48	
01 22 23 00-0520	EA	Set Up And Remove 4' x 16' Slide Rail Panel	412.48	
01 22 23 00-0521	EA	Set Up And Remove 8' x 16' Slide Rail Panel	549.99	
01 22 23 00-0522	EA	Set Up And Remove 4' x 20' Slide Rail Panel	549.99	
01 22 23 00-0523	EA	Set Up And Remove 8' x 20' Slide Rail Panel	687.48	
01 22 23 00-0524	EA	Set Up And Remove 14' Stacking Post	412.48	
01 22 23 00-0525	EA	Set Up And Remove Stacking Brackets	137.49	
01 22 23 00-0526	EA	Stacking Brackets Rigging Tub	2,065.39	

01 22 23 00-0527 Tractors *(01 22 23 00-0278)*

Note: Excludes operator, delivery, set-up, and removal.

01 22 23 00-0528	DAY	20 To 29 HP Tractor	495.26	
		For Half Day Usage, Deduct	*-154.77*	
01 22 23 00-0529	WK	20 To 29 HP Tractor	1,192.30	
01 22 23 00-0530	MO	20 To 29 HP Tractor	3,219.21	
		For >6 Months (>26 Weeks), Deduct	*-128.77*	
01 22 23 00-0531	DAY	30 To 35 HP Tractor	513.17	
		For Half Day Usage, Deduct	*-160.37*	
01 22 23 00-0532	WK	30 To 35 HP Tractor	1,321.14	
01 22 23 00-0533	MO	30 To 35 HP Tractor	3,657.70	
		For >6 Months (>26 Weeks), Deduct	*-146.31*	
01 22 23 00-0534	DAY	40 To 45 HP Tractor	524.09	
		For Half Day Usage, Deduct	*-163.78*	
01 22 23 00-0535	WK	40 To 45 HP Tractor	1,408.49	
01 22 23 00-0536	MO	40 To 45 HP Tractor	3,865.15	
		For >6 Months (>26 Weeks), Deduct	*-154.61*	
01 22 23 00-0537	DAY	80 To 89 HP Tractor	674.76	
		For Half Day Usage, Deduct	*-210.86*	
01 22 23 00-0538	WK	80 To 89 HP Tractor	1,913.58	
01 22 23 00-0539	MO	80 To 89 HP Tractor	5,479.12	
		For >6 Months (>26 Weeks), Deduct	*-219.16*	
01 22 23 00-0540	DAY	60" Rotary Mower Attachment For Tractors	211.82	
		For Half Day Usage, Deduct	*-66.19*	
01 22 23 00-0541	WK	60" Rotary Mower Attachment For Tractors	655.11	
01 22 23 00-0542	DAY	84" Rotary Mower Attachment For Tractors	231.47	
		For Half Day Usage, Deduct	*-72.33*	
01 22 23 00-0543	WK	84" Rotary Mower Attachment For Tractors	709.70	
01 22 23 00-0544	DAY	Under Deck Rotary Mower Attachment For Tractors	42.44	
		For Half Day Usage, Deduct	*-13.26*	
01 22 23 00-0545	WK	Under Deck Rotary Mower Attachment For Tractors	169.77	

01 22 23 00-0546 Trench Boxes/Trench Shields *(01 22 23 00-0278)*

Note: Trenching tasks include moving the trench box in excavation as trenching proceeds. Includes delivery to job site and pick-up when complete. For stackable units, combine multiple units for depth required.

01 22 23 00-0547	WK	4' x 6' Trench Box With Up To 48" Spreaders	301.03	
01 22 23 00-0548	MO	4' x 6' Trench Box With Up To 48" Spreaders	903.08	
		For >6 Months (>26 Weeks), Deduct	*-36.12*	
01 22 23 00-0549	WK	6' x 6' Trench Box With Up To 48" Spreaders	339.87	
01 22 23 00-0550	MO	6' x 6' Trench Box With Up To 48" Spreaders	1,019.60	
		For >6 Months (>26 Weeks), Deduct	*-40.78*	
01 22 23 00-0551	WK	8' x 6' Trench Box With Up To 48" Spreaders	359.29	
01 22 23 00-0552	MO	8' x 6' Trench Box With Up To 48" Spreaders	1,077.87	
		For >6 Months (>26 Weeks), Deduct	*-43.11*	
01 22 23 00-0553	WK	4' x 8' Trench Box With Up To 48" Spreaders	330.16	
01 22 23 00-0554	MO	4' x 8' Trench Box With Up To 48" Spreaders	990.47	
		For >6 Months (>26 Weeks), Deduct	*-39.62*	
01 22 23 00-0555	WK	6' x 8' Trench Box With Up To 48" Spreaders	388.42	
01 22 23 00-0556	MO	6' x 8' Trench Box With Up To 48" Spreaders	1,165.26	
		For >6 Months (>26 Weeks), Deduct	*-46.61*	
01 22 23 00-0557	WK	8' x 8' Trench Box With Up To 48" Spreaders	436.97	
01 22 23 00-0558	MO	8' x 8' Trench Box With Up To 48" Spreaders	1,310.92	
		For >6 Months (>26 Weeks), Deduct	*-52.44*	
01 22 23 00-0559	WK	4' x 10' Trench Box With Up To 48" Spreaders	369.00	
01 22 23 00-0560	MO	4' x 10' Trench Box With Up To 48" Spreaders	1,107.00	
		For >6 Months (>26 Weeks), Deduct	*-44.28*	
01 22 23 00-0561	WK	6' x 10' Trench Box With Up To 48" Spreaders	436.97	
01 22 23 00-0562	MO	6' x 10' Trench Box With Up To 48" Spreaders	1,310.92	
		For >6 Months (>26 Weeks), Deduct	*-52.44*	
01 22 23 00-0563	WK	8' x 10' Trench Box With Up To 48" Spreaders	534.08	
01 22 23 00-0564	MO	8' x 10' Trench Box With Up To 48" Spreaders	1,592.52	
		For >6 Months (>26 Weeks), Deduct	*-63.70*	
01 22 23 00-0565	WK	4' x 12' Trench Box With Up To 48" Spreaders	436.97	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-0566	MO	4' x 12' Trench Box With Up To 48" Spreaders	1,310.92	
		For >6 Months (>26 Weeks), Deduct	*-52.44*	
01 22 23 00-0567	WK	6' x 12' Trench Box With Up To 48" Spreaders	534.08	
01 22 23 00-0568	MO	6' x 12' Trench Box With Up To 48" Spreaders	1,602.23	
		For >6 Months (>26 Weeks), Deduct	*-64.09*	
01 22 23 00-0569	WK	8' x 12' Trench Box With Up To 48" Spreaders	679.74	
01 22 23 00-0570	MO	8' x 12' Trench Box With Up To 48" Spreaders	2,039.20	
		For >6 Months (>26 Weeks), Deduct	*-81.57*	
01 22 23 00-0571	WK	4' x 14' Trench Box With Up To 48" Spreaders	485.52	
01 22 23 00-0572	MO	4' x 14' Trench Box With Up To 48" Spreaders	1,456.58	
		For >6 Months (>26 Weeks), Deduct	*-58.26*	
01 22 23 00-0573	WK	6' x 14' Trench Box With Up To 48" Spreaders	631.18	
01 22 23 00-0574	MO	6' x 14' Trench Box With Up To 48" Spreaders	1,893.55	
		For >6 Months (>26 Weeks), Deduct	*-75.74*	
01 22 23 00-0575	WK	8' x 14' Trench Box With Up To 48" Spreaders	776.84	
01 22 23 00-0576	MO	8' x 14' Trench Box With Up To 48" Spreaders	2,330.52	
		For >6 Months (>26 Weeks), Deduct	*-93.22*	
01 22 23 00-0577	WK	4' x 16' Trench Box With Up To 48" Spreaders	534.08	
01 22 23 00-0578	MO	4' x 16' Trench Box With Up To 48" Spreaders	1,602.23	
		For >6 Months (>26 Weeks), Deduct	*-64.09*	
01 22 23 00-0579	WK	6' x 16' Trench Box With Up To 48" Spreaders	728.29	
01 22 23 00-0580	MO	6' x 16' Trench Box With Up To 48" Spreaders	2,184.86	
		For >6 Months (>26 Weeks), Deduct	*-87.39*	
01 22 23 00-0581	WK	8' x 16' Trench Box With Up To 48" Spreaders	873.94	
01 22 23 00-0582	MO	8' x 16' Trench Box With Up To 48" Spreaders	2,621.84	
		For >6 Months (>26 Weeks), Deduct	*-104.87*	
01 22 23 00-0583	WK	4' x 20' Trench Box With Up To 48" Spreaders	631.18	
01 22 23 00-0584	MO	4' x 20' Trench Box With Up To 48" Spreaders	1,893.55	
		For >6 Months (>26 Weeks), Deduct	*-75.74*	
01 22 23 00-0585	WK	6' x 20' Trench Box With Up To 48" Spreaders	873.94	
01 22 23 00-0586	MO	6' x 20' Trench Box With Up To 48" Spreaders	2,621.84	
		For >6 Months (>26 Weeks), Deduct	*-104.87*	
01 22 23 00-0587	WK	8' x 20' Trench Box With Up To 48" Spreaders	1,019.60	
01 22 23 00-0588	MO	8' x 20' Trench Box With Up To 48" Spreaders	3,058.81	
		For >6 Months (>26 Weeks), Deduct	*-122.35*	
01 22 23 00-0589	WK	4' x 24' Trench Box With Up To 48" Spreaders	873.94	
01 22 23 00-0590	MO	4' x 24' Trench Box With Up To 48" Spreaders	2,621.84	
		For >6 Months (>26 Weeks), Deduct	*-104.87*	
01 22 23 00-0591	WK	6' x 24' Trench Box With Up To 48" Spreaders	1,068.16	
01 22 23 00-0592	MO	6' x 24' Trench Box With Up To 48" Spreaders	3,204.46	
		For >6 Months (>26 Weeks), Deduct	*-128.18*	
01 22 23 00-0593	WK	8' x 24' Trench Box With Up To 48" Spreaders	1,165.26	
01 22 23 00-0594	MO	8' x 24' Trench Box With Up To 48" Spreaders	3,495.78	
		For >6 Months (>26 Weeks), Deduct	*-139.83*	
01 22 23 00-0595	WK	For Spreaders >48" To 84", Add	29.13	
01 22 23 00-0596	MO	For Spreaders >48" To 84", Add	87.39	
		For >6 Months (>26 Weeks), Deduct	*-3.50*	
01 22 23 00-0597	WK	For Spreaders >84" To 120", Add	174.79	
01 22 23 00-0598	MO	For Spreaders >84" To 120", Add	524.37	
		For >6 Months (>26 Weeks), Deduct	*-20.97*	
01 22 23 00-0599	WK	For Spreaders >120", Add	369.00	
01 22 23 00-0600	MO	For Spreaders >120", Add	1,107.00	
		For >6 Months (>26 Weeks), Deduct	*-44.28*	
01 22 23 00-0601	WK	8' x 4' Manhole Box	458.82	
01 22 23 00-0602	MO	8' x 4' Manhole Box	1,376.46	
		For >6 Months (>26 Weeks), Deduct	*-55.06*	
01 22 23 00-0603	WK	8' x 8' Manhole Box	655.46	
01 22 23 00-0604	MO	8' x 8' Manhole Box	1,966.38	
		For >6 Months (>26 Weeks), Deduct	*-78.66*	

01 22 23 00-0605 Trenchers *(01 22 23 00-0278)*

Note: Includes full-time operator. Excludes delivery, set-up, and removal.

01 22 23 00-0606	DAY	4' Maximum Trench Depth, Ride-On Trencher With Full-Time Operator	1,353.91	
		For Equipment Without Operator, Deduct	*-1,004.52*	
		For Half Day Usage, Deduct	*-611.44*	
01 22 23 00-0607	WK	4' Maximum Trench Depth, Ride-On Trencher With Full-Time Operator	6,212.71	
		For Equipment Without Operator, Deduct	*-5,022.59*	
01 22 23 00-0608	MO	4' Maximum Trench Depth, Ride-On Trencher With Full-Time Operator	25,040.10	
		For Equipment Without Operator, Deduct	*-21,764.55*	
		For >6 Months (>26 Weeks), Deduct	*-131.02*	
01 22 23 00-0609	DAY	5' Maximum Trench Depth, Ride-On Trencher With Full-Time Operator	1,943.51	
		For Equipment Without Operator, Deduct	*-1,004.52*	
		For Half Day Usage, Deduct	*-795.69*	
01 22 23 00-0610	WK	5' Maximum Trench Depth, Ride-On Trencher With Full-Time Operator	8,199.87	
		For Equipment Without Operator, Deduct	*-5,022.59*	
01 22 23 00-0611	MO	5' Maximum Trench Depth, Ride-On Trencher With Full-Time Operator	30,499.35	
		For Equipment Without Operator, Deduct	*-21,764.55*	
		For >6 Months (>26 Weeks), Deduct	*-349.39*	

01 22 23 00-0612 Portable Sediment Tank *(01 22 23 00-0278)*

Note: Includes delivery to job site and pick-up when complete.

01 22 23 00-0613	WK	Portable Sediment Tank	212.21

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-0614	MO	Portable Sediment Tank	622.49	
		For >6 Months (>26 Weeks), Deduct	*-24.90*	

01 22 23 00-0615 Heavy Equipment (Ground Protection) Mats *(01 22 23 00-0278)*

Note: Rental price per mat. Excludes placement, moving, mobilization and demobilization. See CSI section 01 22 23 00-0278 for equipment for offloading/reloading from delivery vehicle, placing, and moving mats, 01 71 13 00-0001 for equipment delivery, pickup, mobilization and demobilization.

01 22 23 00-0616	DAY	14' Width x 8' Length, 6" Thick, 3-Ply Laminated Heavy Equipment Mat	28.12	
		For Half Day Usage, Deduct	*-8.79*	
01 22 23 00-0617	WK	14' Width x 8' Length, 6" Thick, 3-Ply Laminated Heavy Equipment Mat	66.94	
01 22 23 00-0618	MO	14' Width x 8' Length, 6" Thick, 3-Ply Laminated Heavy Equipment Mat	140.58	
		For >6 Months (>26 Weeks), Deduct	*-5.62*	
01 22 23 00-0619	DAY	16' Width x 8' Length, 6" Thick, 3-Ply Laminated Heavy Equipment Mat	29.52	
		For Half Day Usage, Deduct	*-9.23*	
01 22 23 00-0620	WK	16' Width x 8' Length, 6" Thick, 3-Ply Laminated Heavy Equipment Mat	70.29	
01 22 23 00-0621	MO	16' Width x 8' Length, 6" Thick, 3-Ply Laminated Heavy Equipment Mat	147.61	
		For >6 Months (>26 Weeks), Deduct	*-5.90*	
01 22 23 00-0622	Day	16' Width x 4' Length, 8" Thick Hardwood Timbers, Dragline/Excavator Mat	23.90	
		For Half Day Usage, Deduct	*-7.47*	
01 22 23 00-0623	WK	16' Width x 4' Length, 8" Thick Hardwood Timbers, Dragline/Excavator Mat	56.23	
01 22 23 00-0624	MO	16' Width x 4' Length, 8" Thick Hardwood Timbers, Dragline/Excavator Mat	119.49	
		For >6 Months (>26 Weeks), Deduct	*-4.78*	
01 22 23 00-0625	Day	18' Width x 4' Length, 8" Thick Hardwood Timbers, Dragline/Excavator Mat	26.71	
		For Half Day Usage, Deduct	*-8.35*	
01 22 23 00-0626	WK	18' Width x 4' Length, 8" Thick Hardwood Timbers, Dragline/Excavator Mat	63.26	
01 22 23 00-0627	MO	18' Width x 4' Length, 8" Thick Hardwood Timbers, Dragline/Excavator Mat	133.55	
		For >6 Months (>26 Weeks), Deduct	*-5.34*	
01 22 23 00-0628	Day	20' Width x 4' Length, 8" Thick Hardwood Timbers, Dragline/Excavator Mat	29.52	
		For Half Day Usage, Deduct	*-9.23*	
01 22 23 00-0629	WK	20' Width x 4' Length, 8" Thick Hardwood Timbers, Dragline/Excavator Mat	70.29	
01 22 23 00-0630	MO	20' Width x 4' Length, 8" Thick Hardwood Timbers, Dragline/Excavator Mat	147.61	
		For >6 Months (>26 Weeks), Deduct	*-5.90*	
01 22 23 00-0631	Day	24' Width x 4' Length, 8" Thick Hardwood Timbers, Dragline/Excavator Mat	32.33	
		For Half Day Usage, Deduct	*-10.10*	
01 22 23 00-0632	WK	24' Width x 4' Length, 8" Thick Hardwood Timbers, Dragline/Excavator Mat	76.98	
01 22 23 00-0633	MO	24' Width x 4' Length, 8" Thick Hardwood Timbers, Dragline/Excavator Mat	161.67	
		For >6 Months (>26 Weeks), Deduct	*-6.47*	
01 22 23 00-0634	Day	12' Width x 4' Length, 12" Thick Hardwood Timbers, Crane Mat	25.30	
		For Half Day Usage, Deduct	*-7.91*	
01 22 23 00-0635	WK	12' Width x 4' Length, 12" Thick Hardwood Timbers, Crane Mat	70.29	
01 22 23 00-0636	MO	12' Width x 4' Length, 12" Thick Hardwood Timbers, Crane Mat	126.52	
		For >6 Months (>26 Weeks), Deduct	*-5.06*	
01 22 23 00-0637	Day	16' Width x 4' Length, 12" Thick Hardwood Timbers, Crane Mat	29.52	
		For Half Day Usage, Deduct	*-9.23*	
01 22 23 00-0638	WK	16' Width x 4' Length, 12" Thick Hardwood Timbers, Crane Mat	70.29	
01 22 23 00-0639	MO	16' Width x 4' Length, 12" Thick Hardwood Timbers, Crane Mat	147.61	
		For >6 Months (>26 Weeks), Deduct	*-5.90*	
01 22 23 00-0640	Day	20' Width x 4' Length, 12" Thick Hardwood Timbers, Crane Mat	35.14	
		For Half Day Usage, Deduct	*-10.98*	
01 22 23 00-0641	WK	20' Width x 4' Length, 12" Thick Hardwood Timbers, Crane Mat	77.32	
01 22 23 00-0642	MO	20' Width x 4' Length, 12" Thick Hardwood Timbers, Crane Mat	175.72	
		For >6 Months (>26 Weeks), Deduct	*-7.03*	
01 22 23 00-0643	Day	24' Width x 4' Length, 12" Thick Hardwood Timbers, Crane Mat	37.96	
		For Half Day Usage, Deduct	*-11.86*	
01 22 23 00-0644	WK	24' Width x 4' Length, 12" Thick Hardwood Timbers, Crane Mat	90.37	
01 22 23 00-0645	MO	24' Width x 4' Length, 12" Thick Hardwood Timbers, Crane Mat	189.78	
		For >6 Months (>26 Weeks), Deduct	*-7.59*	
01 22 23 00-0646	Day	28' Width x 4' Length, 12" Thick Hardwood Timbers, Crane Mat	40.77	
		For Half Day Usage, Deduct	*-12.74*	
01 22 23 00-0647	WK	28' Width x 4' Length, 12" Thick Hardwood Timbers, Crane Mat	97.07	
01 22 23 00-0648	MO	28' Width x 4' Length, 12" Thick Hardwood Timbers, Crane Mat	203.84	
		For >6 Months (>26 Weeks), Deduct	*-8.15*	
01 22 23 00-0649	Day	30' Width x 4' Length, 12" Thick Hardwood Timbers, Crane Mat	42.17	
		For Half Day Usage, Deduct	*-13.18*	
01 22 23 00-0650	WK	30' Width x 4' Length, 12" Thick Hardwood Timbers, Crane Mat	100.41	
01 22 23 00-0651	MO	30' Width x 4' Length, 12" Thick Hardwood Timbers, Crane Mat	210.87	
		For >6 Months (>26 Weeks), Deduct	*-8.43*	
01 22 23 00-0652	Day	14' Width x 8' Length, 2-3/4" Thick, Laminated Heavy Equipment Mat (Emtek™)	13.52	
		For Half Day Usage, Deduct	*-4.23*	
01 22 23 00-0653	WK	14' Width x 8' Length, 2-3/4" Thick, Laminated Heavy Equipment Mat (Emtek™)	33.81	
01 22 23 00-0654	MO	14' Width x 8' Length, 2-3/4" Thick, Laminated Heavy Equipment Mat (Emtek™)	101.43	
		For >6 Months (>26 Weeks), Deduct	*-4.06*	
01 22 23 00-0655	Day	14' Width x 8' Length, 3-1/2" Thick, Laminated Heavy Equipment Mat (Emtek™)	16.17	
		For Half Day Usage, Deduct	*-5.05*	
01 22 23 00-0656	WK	14' Width x 8' Length, 3-1/2" Thick, Laminated Heavy Equipment Mat (Emtek™)	40.42	
01 22 23 00-0657	MO	14' Width x 8' Length, 3-1/2" Thick, Laminated Heavy Equipment Mat (Emtek™)	121.25	
		For >6 Months (>26 Weeks), Deduct	*-4.85*	
01 22 23 00-0658	Day	16' Width x 8' Length, 3-1/2" Thick, Laminated Heavy Equipment Mat (Emtek™)	18.46	
		For Half Day Usage, Deduct	*-5.77*	
01 22 23 00-0659	WK	16' Width x 8' Length, 3-1/2" Thick, Laminated Heavy Equipment Mat (Emtek™)	46.16	
01 22 23 00-0660	MO	16' Width x 8' Length, 3-1/2" Thick, Laminated Heavy Equipment Mat (Emtek™)	138.47	
		For >6 Months (>26 Weeks), Deduct	*-5.54*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-0661	Day	14' Width x 8' Length, 4-1/2" Thick, Laminated Heavy Equipment Mat (Emtek™)	19.68	
		For Half Day Usage, Deduct	*-6.15*	
01 22 23 00-0662	WK	14' Width x 8' Length, 4-1/2" Thick, Laminated Heavy Equipment Mat (Emtek™)	49.20	
01 22 23 00-0663	MO	14' Width x 8' Length, 4-1/2" Thick, Laminated Heavy Equipment Mat (Emtek™)	147.61	
		For >6 Months (>26 Weeks), Deduct	*-5.90*	
01 22 23 00-0664	Day	16' Width x 8' Length, 4-1/2" Thick, Laminated Heavy Equipment Mat (Emtek™)	22.49	
		For Half Day Usage, Deduct	*-7.03*	
01 22 23 00-0665	WK	16' Width x 8' Length, 4-1/2" Thick, Laminated Heavy Equipment Mat (Emtek™)	56.23	
01 22 23 00-0666	MO	16' Width x 8' Length, 4-1/2" Thick, Laminated Heavy Equipment Mat (Emtek™)	168.70	
		For >6 Months (>26 Weeks), Deduct	*-6.75*	
01 22 23 00-0667	Day	16' Width x 8' Length, 5-1/2" Thick, Laminated Heavy Equipment Mat (Emtek™)	25.85	
		For Half Day Usage, Deduct	*-8.08*	
01 22 23 00-0668	WK	16' Width x 8' Length, 5-1/2" Thick, Laminated Heavy Equipment Mat (Emtek™)	64.62	
01 22 23 00-0669	MO	16' Width x 8' Length, 5-1/2" Thick, Laminated Heavy Equipment Mat (Emtek™)	193.86	
		For >6 Months (>26 Weeks), Deduct	*-7.75*	
01 22 23 00-0670	Day	24' Width x 4' Length, 6" Thick, Laminated Heavy Equipment Mat (Emtek™)	19.89	
		For Half Day Usage, Deduct	*-6.22*	
01 22 23 00-0671	WK	24' Width x 4' Length, 6" Thick, Laminated Heavy Equipment Mat (Emtek™)	49.72	
01 22 23 00-0672	MO	24' Width x 4' Length, 6" Thick, Laminated Heavy Equipment Mat (Emtek™)	149.16	
		For >6 Months (>26 Weeks), Deduct	*-5.97*	
01 22 23 00-0673	Day	30' Width x 4' Length, 6-1/2" Thick, Laminated Heavy Equipment Mat (Emtek™)	26.93	
		For Half Day Usage, Deduct	*-8.42*	
01 22 23 00-0674	WK	30' Width x 4' Length, 6-1/2" Thick, Laminated Heavy Equipment Mat (Emtek™)	67.31	
01 22 23 00-0675	MO	30' Width x 4' Length, 6-1/2" Thick, Laminated Heavy Equipment Mat (Emtek™)	201.94	
		For >6 Months (>26 Weeks), Deduct	*-8.08*	
01 22 23 00-0676	Day	24' Width x 4' Length, 7-1/2" Thick, Laminated Heavy Equipment Mat (Emtek™)	23.28	
		For Half Day Usage, Deduct	*-7.28*	
01 22 23 00-0677	WK	24' Width x 4' Length, 7-1/2" Thick, Laminated Heavy Equipment Mat (Emtek™)	58.20	
01 22 23 00-0678	MO	24' Width x 4' Length, 7-1/2" Thick, Laminated Heavy Equipment Mat (Emtek™)	174.60	
		For >6 Months (>26 Weeks), Deduct	*-6.98*	
01 22 23 00-0679	Day	40' Width x 4' Length, 7-1/2" Thick, Laminated Heavy Equipment Mat (Emtek™)	38.83	
		For Half Day Usage, Deduct	*-12.13*	
01 22 23 00-0680	WK	40' Width x 4' Length, 7-1/2" Thick, Laminated Heavy Equipment Mat (Emtek™)	97.07	
01 22 23 00-0681	MO	40' Width x 4' Length, 7-1/2" Thick, Laminated Heavy Equipment Mat (Emtek™)	291.20	
		For >6 Months (>26 Weeks), Deduct	*-11.65*	
01 22 23 00-0682	Day	40' Width x 4' Length, 8" Thick, Laminated Heavy Equipment Mat (Emtek™)	41.39	
		For Half Day Usage, Deduct	*-12.93*	
01 22 23 00-0683	WK	40' Width x 4' Length, 8" Thick, Laminated Heavy Equipment Mat (Emtek™)	103.47	
01 22 23 00-0684	MO	40' Width x 4' Length, 8" Thick, Laminated Heavy Equipment Mat (Emtek™)	310.40	
		For >6 Months (>26 Weeks), Deduct	*-12.42*	

01 22 23 00-0685 Truck Mounted Vacuum Excavator *(01 22 23 00-0278)*

Note: Includes driver, delivery, and removal.

01 22 23 00-0686	DAY	Truck Mounted Vacuum Excavator With Full-time Operator	8,684.65	
		For Half Day Usage, Deduct	*-2,910.64*	

01 22 23 00-0687 Electrical Equipment *(01 22 23)*

01 22 23 00-0688 Tripod Mounted Floodlights *(01 22 23 00-0687)*

Note: Includes delivery to job site and pick-up when complete.

01 22 23 00-0689	DAY	500 Watt, 115 Volt, 2 Lamp, Portable Light Stand With Tripod	66.52	
		For Half Day Usage, Deduct	*-20.79*	
01 22 23 00-0690	WK	500 Watt, 115 Volt, 2 Lamp, Portable Light Stand With Tripod	157.37	
01 22 23 00-0691	MO	500 Watt, 115 Volt, 2 Lamp, Portable Light Stand With Tripod	332.59	
		For >6 Months (>26 Weeks), Deduct	*-13.30*	
01 22 23 00-0692	DAY	1,000 Watt, 115 Volt, 2 Lamp, Portable Light Stand With Tripod	66.52	
		For Half Day Usage, Deduct	*-20.79*	
01 22 23 00-0693	WK	1,000 Watt, 115 Volt, 2 Lamp, Portable Light Stand With Tripod	194.69	
01 22 23 00-0694	MO	1,000 Watt, 115 Volt, 2 Lamp, Portable Light Stand With Tripod	575.95	
		For >6 Months (>26 Weeks), Deduct	*-23.04*	
01 22 23 00-0695	DAY	2,000 Watt, 115 Volt, 2 Lamp, Portable Light Stand With Tripod	74.63	
		For Half Day Usage, Deduct	*-23.32*	
01 22 23 00-0696	WK	2,000 Watt, 115 Volt, 2 Lamp, Portable Light Stand With Tripod	202.80	
01 22 23 00-0697	MO	2,000 Watt, 115 Volt, 2 Lamp, Portable Light Stand With Tripod	494.83	
		For >6 Months (>26 Weeks), Deduct	*-19.79*	

01 22 23 00-0698 Trailer Mounted Floodlights *(01 22 23 00-0687)*

Note: Includes delivery to job site and pick-up when complete. Excludes operator.

01 22 23 00-0699	DAY	4 x 1,000 Watt Floodlights, 30' Telescoping Tower, Diesel Power Trailer Mounted Light Tower	186.58	
		For Half Day Usage, Deduct	*-58.31*	
01 22 23 00-0700	WK	4 x 1,000 Watt Floodlights, 30' Telescoping Tower, Diesel Power Trailer Mounted Light Tower	413.71	
01 22 23 00-0701	MO	4 x 1,000 Watt Floodlights, 30' Telescoping Tower, Diesel Power Trailer Mounted Light Tower	892.32	
		For >6 Months (>26 Weeks), Deduct	*-35.69*	

01 22 23 00-0702 Generator Sets *(01 22 23 00-0687)*

01 22 23 00-0703 Portable, Gas Powered Generator Sets *(01 22 23 00-0702)*

Note: With 24 hour day-tank. Includes delivery to job site and pick-up when complete. Excludes cables, operator and fuel costs. See CSI section 01 22 23 00-0890 for reimbursable fuel fees.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-0704	DAY	3.6 KW Gas Powered Generator Set Note: Fuel consumption: 100% load – 0.54 gallons per hour	53.75	
		For LP Or NG Gas, Add	*6.72*	
		For Half Day Usage, Deduct	*-16.80*	
01 22 23 00-0705	WK	3.6 KW Gas Powered Generator Set Note: Fuel consumption: 100% load – 0.54 gallons per hour	193.73	
		For LP Or NG Gas, Add	*24.22*	
01 22 23 00-0706	MO	3.6 KW Gas Powered Generator Set Note: Fuel consumption: 100% load – 0.54 gallons per hour	537.46	
		For LP Or NG Gas, Add	*67.18*	
		For >6 Months (>26 Weeks), Deduct	*-21.50*	
01 22 23 00-0707	DAY	5 KW Gas Powered Generator Set Note: Fuel consumption: 100% load – 0.75 gallons per hour	76.24	
		For LP Or NG Gas, Add	*9.53*	
		For Half Day Usage, Deduct	*-23.83*	
01 22 23 00-0708	WK	5 KW Gas Powered Generator Set Note: Fuel consumption: 100% load – 0.75 gallons per hour	243.73	
		For LP Or NG Gas, Add	*30.47*	
01 22 23 00-0709	MO	5 KW Gas Powered Generator Set Note: Fuel consumption: 100% load – 0.75 gallons per hour	556.21	
		For LP Or NG Gas, Add	*69.53*	
		For >6 Months (>26 Weeks), Deduct	*-22.25*	
01 22 23 00-0710	DAY	6.5 KW Gas Powered Generator Set Note: Fuel consumption: 100% load – 0.975 gallons per hour	97.49	
		For LP Or NG Gas, Add	*12.19*	
		For Half Day Usage, Deduct	*-30.47*	
01 22 23 00-0711	WK	6.5 KW Gas Powered Generator Set Note: Fuel consumption: 100% load – 0.975 gallons per hour	262.48	
		For LP Or NG Gas, Add	*32.81*	
01 22 23 00-0712	MO	6.5 KW Gas Powered Generator Set Note: Fuel consumption: 100% load – 0.975 gallons per hour	724.94	
		For LP Or NG Gas, Add	*90.62*	
		For >6 Months (>26 Weeks), Deduct	*-29.00*	
01 22 23 00-0713	DAY	10 KW Gas Powered Generator Set Note: Fuel consumption: 100% load – 1.35 gallons per hour	108.74	
		For LP Or NG Gas, Add	*13.59*	
		For Half Day Usage, Deduct	*-33.98*	
01 22 23 00-0714	WK	10 KW Gas Powered Generator Set Note: Fuel consumption: 100% load – 1.35 gallons per hour	293.73	
		For LP Or NG Gas, Add	*36.72*	
01 22 23 00-0715	MO	10 KW Gas Powered Generator Set Note: Fuel consumption: 100% load – 1.35 gallons per hour	843.68	
		For LP Or NG Gas, Add	*105.46*	
		For >6 Months (>26 Weeks), Deduct	*-33.75*	
01 22 23 00-0716	DAY	15 KW Gas Powered Generator Set Note: Fuel consumption: 100% load – 1.70 gallons per hour	199.11	
		For LP Or NG Gas, Add	*24.89*	
		For Half Day Usage, Deduct	*-62.22*	
01 22 23 00-0717	WK	15 KW Gas Powered Generator Set Note: Fuel consumption: 100% load – 1.6 gallons per hour	565.63	
		For LP Or NG Gas, Add	*70.70*	
01 22 23 00-0718	MO	15 KW Gas Powered Generator Set Note: Fuel consumption: 100% load – 1.6 gallons per hour	1,221.78	
		For LP Or NG Gas, Add	*152.72*	
		For >6 Months (>26 Weeks), Deduct	*-48.87*	

01 22 23 00-0719 Towable, Diesel Powered Generator Sets *(01 22 23 00-0702)*

Note: Includes 24 hour day-tank on sizes up to 180 KW, 40 hour day-tank for sizes greater than 180 KW To 300 KW and 1,000 gallon for sizes greater than 300 KW. Multi-voltage transformer unless stated otherwise, trailer mounted including sound attenuation and control panel. Excludes cables, operator and fuel costs. See CSI section 01 22 23 00-0890 for reimbursable fuel fees.

01 22 23 00-0720	DAY	20 KW, 60 Hertz Towable Diesel Powered Generator Set Note: Fuel consumption: 100% load – 1.6 gallons per hour, 75% load - 1.3 gallons per hour, 50% load - 0.9 gallons per hour.	223.73	
		For >8 To 16 Hours Usage Per Day, Add	*89.49*	
		For >16 To 24 Hours Usage Per Day, Add	*178.98*	
		For Tier 4 Diesel Generator, Add	*81.66*	
01 22 23 00-0721	WK	20 KW, 60 Hertz Towable Diesel Powered Generator Set Note: Fuel consumption: 100% load – 1.6 gallons per hour, 75% load - 1.3 gallons per hour, 50% load - 0.9 gallons per hour.	584.95	
		For >40 To 80 Hours Usage Per Week, Add	*233.98*	
		For >80 Hours Usage Per Week, Add	*467.96*	
		For Tier 4 Diesel Generator, Add	*213.51*	
01 22 23 00-0722	MO	20 KW, 60 Hertz Towable Diesel Powered Generator Set Note: Fuel consumption: 100% load – 1.6 gallons per hour, 75% load - 1.3 gallons per hour, 50% load - 0.9 gallons per hour.	1,593.62	
		For >160 To 320 Hours Usage Per Month, Add	*637.45*	
		For >320 Hours Usage Per Month, Add	*1,274.90*	
		For >6 Months (>26 Weeks), Deduct	*-63.74*	
		For Tier 4 Diesel Generator, Add	*581.67*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-0723	DAY	30 KW, 60 Hertz Towable Diesel Powered Generator Set	387.31	
		Note: Fuel consumption: 100% load – 2.9 gallons per hour, 75% load - 2.4 gallons per hour, 50% load - 1.8 gallons per hour.		
		For >8 To 16 Hours Usage Per Day, Add	*154.92*	
		For >16 To 24 Hours Usage Per Day, Add	*309.85*	
		For Tier 4 Diesel Generator, Add	*141.37*	
01 22 23 00-0724	WK	30 KW, 60 Hertz Towable Diesel Powered Generator Set	1,149.45	
		Note: Fuel consumption: 100% load – 2.9 gallons per hour, 75% load - 2.4 gallons per hour, 50% load - 1.8 gallons per hour.		
		For >40 To 80 Hours Usage Per Week, Add	*459.78*	
		For >80 Hours Usage Per Week, Add	*919.56*	
		For Tier 4 Diesel Generator, Add	*419.55*	
01 22 23 00-0725	MO	30 KW, 60 Hertz Towable Diesel Powered Generator Set	2,373.86	
		Note: Fuel consumption: 100% load – 2.9 gallons per hour, 75% load - 2.4 gallons per hour, 50% load - 1.8 gallons per hour.		
		For >160 To 320 Hours Usage Per Month, Add	*949.54*	
		For >320 Hours Usage Per Month, Add	*1,899.09*	
		For >6 Months (>26 Weeks), Deduct	*-94.95*	
		For Tier 4 Diesel Generator, Add	*866.46*	
01 22 23 00-0726	DAY	40.0 KW, 60 Hertz Towable Diesel Powered Generator Set	424.80	
		Note: Fuel consumption: 100% load - 4.0 gallons per hour, 75% load - 3.2 gallons per hour, 50% load - 2.3 gallons per hour.		
		For >8 To 16 Hours Usage Per Day, Add	*169.92*	
		For >16 To 24 Hours Usage Per Day, Add	*339.84*	
		For Tier 4 Diesel Generator, Add	*155.05*	
01 22 23 00-0727	WK	40.0 KW, 60 Hertz Towable Diesel Powered Generator Set	1,186.93	
		Note: Fuel consumption: 100% load - 4.0 gallons per hour, 75% load - 3.2 gallons per hour, 50% load - 2.3 gallons per hour.		
		For >40 To 80 Hours Usage Per Week, Add	*474.77*	
		For >80 Hours Usage Per Week, Add	*949.54*	
		For Tier 4 Diesel Generator, Add	*433.23*	
01 22 23 00-0728	MO	40.0 KW, 60 Hertz Towable Diesel Powered Generator Set	2,623.74	
		Note: Fuel consumption: 100% load - 4.0 gallons per hour, 75% load - 3.2 gallons per hour, 50% load - 2.3 gallons per hour.		
		For >160 To 320 Hours Usage Per Month, Add	*1,049.50*	
		For >320 Hours Usage Per Month, Add	*2,098.99*	
		For >6 Months (>26 Weeks), Deduct	*-104.95*	
		For Tier 4 Diesel Generator, Add	*957.67*	
01 22 23 00-0729	DAY	55.0 KW, 60 Hertz Towable Diesel Powered Generator Set	456.03	
		Note: Fuel consumption: 100% load – 4.8 gallons per hour, 75% load - 3.8 gallons per hour, 50% load - 2.9 gallons per hour.		
		For >8 To 16 Hours Usage Per Day, Add	*182.41*	
		For >16 To 24 Hours Usage Per Day, Add	*364.82*	
		For Tier 4 Diesel Generator, Add	*166.45*	
01 22 23 00-0730	WK	55.0 KW, 60 Hertz Towable Diesel Powered Generator Set	1,249.40	
		Note: Fuel consumption: 100% load – 4.8 gallons per hour, 75% load - 3.8 gallons per hour, 50% load - 2.9 gallons per hour.		
		For >40 To 80 Hours Usage Per Week, Add	*499.76*	
		For >80 Hours Usage Per Week, Add	*999.52*	
		For Tier 4 Diesel Generator, Add	*456.03*	
01 22 23 00-0731	MO	55.0 KW, 60 Hertz Towable Diesel Powered Generator Set	2,998.56	
		Note: Fuel consumption: 100% load – 4.8 gallons per hour, 75% load - 3.8 gallons per hour, 50% load - 2.9 gallons per hour.		
		For >160 To 320 Hours Usage Per Month, Add	*1,199.42*	
		For >320 Hours Usage Per Month, Add	*2,398.85*	
		For >6 Months (>26 Weeks), Deduct	*-119.94*	
		For Tier 4 Diesel Generator, Add	*1,094.47*	
01 22 23 00-0732	DAY	70.0 KW, 60 Hertz Towable Diesel Powered Generator Set	499.76	
		Note: Fuel consumption: 100% load – 5.7 gallons per hour, 75% load - 4.3 gallons per hour, 50% load - 3.2 gallons per hour.		
		For >8 To 16 Hours Usage Per Day, Add	*199.90*	
		For >16 To 24 Hours Usage Per Day, Add	*399.81*	
		For Tier 4 Diesel Generator, Add	*182.41*	
01 22 23 00-0733	WK	70.0 KW, 60 Hertz Towable Diesel Powered Generator Set	1,418.07	
		Note: Fuel consumption: 100% load – 5.7 gallons per hour, 75% load - 4.3 gallons per hour, 50% load - 3.2 gallons per hour.		
		For >40 To 80 Hours Usage Per Week, Add	*567.23*	
		For >80 Hours Usage Per Week, Add	*1,134.46*	
		For Tier 4 Diesel Generator, Add	*517.60*	
01 22 23 00-0734	MO	70.0 KW, 60 Hertz Towable Diesel Powered Generator Set	3,373.38	
		Note: Fuel consumption: 100% load – 5.7 gallons per hour, 75% load - 4.3 gallons per hour, 50% load - 3.2 gallons per hour.		
		For >160 To 320 Hours Usage Per Month, Add	*1,349.35*	
		For >320 Hours Usage Per Month, Add	*2,698.70*	
		For >6 Months (>26 Weeks), Deduct	*-134.94*	
		For Tier 4 Diesel Generator, Add	*1,231.28*	
01 22 23 00-0735	DAY	80.0 KW, 60 Hertz Towable Diesel Powered Generator Set	562.23	
		Note: Fuel consumption: 100% load – 6.5 gallons per hour, 75% load - 4.9 gallons per hour, 50% load - 3.6 gallons per hour.		
		For >8 To 16 Hours Usage Per Day, Add	*224.89*	
		For >16 To 24 Hours Usage Per Day, Add	*449.78*	
		For Tier 4 Diesel Generator, Add	*205.21*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-0736	WK	80.0 KW, 60 Hertz Towable Diesel Powered Generator Set Note: Fuel consumption: 100% load – 6.5 gallons per hour, 75% load - 4.9 gallons per hour, 50% load - 3.6 gallons per hour.	1,499.28	
		For >40 To 80 Hours Usage Per Week, Add	*599.71*	
		For >80 Hours Usage Per Week, Add	*1,199.42*	
		For Tier 4 Diesel Generator, Add	*547.24*	
01 22 23 00-0737	MO	80.0 KW, 60 Hertz Towable Diesel Powered Generator Set Note: Fuel consumption: 100% load – 6.5 gallons per hour, 75% load - 4.9 gallons per hour, 50% load - 3.6 gallons per hour.	3,748.20	
		For >160 To 320 Hours Usage Per Month, Add	*1,499.28*	
		For >320 Hours Usage Per Month, Add	*2,998.56*	
		For >6 Months (>26 Weeks), Deduct	*-149.93*	
		For Tier 4 Diesel Generator, Add	*1,368.09*	
01 22 23 00-0738	DAY	100.0 KW, 60 Hertz Towable Diesel Powered Generator Set Note: Fuel consumption: 100% load - 7.4 gallons per hour, 75% load - 5.8 gallons per hour, 50% load - 4.1 gallons per hour.	580.97	
		For >8 To 16 Hours Usage Per Day, Add	*232.39*	
		For >16 To 24 Hours Usage Per Day, Add	*464.78*	
		For Tier 4 Diesel Generator, Add	*183.01*	
01 22 23 00-0739	WK	100.0 KW, 60 Hertz Towable Diesel Powered Generator Set Note: Fuel consumption: 100% load - 7.4 gallons per hour, 75% load - 5.8 gallons per hour, 50% load - 4.1 gallons per hour.	1,561.75	
		For >40 To 80 Hours Usage Per Week, Add	*624.70*	
		For >80 Hours Usage Per Week, Add	*1,249.40*	
		For Tier 4 Diesel Generator, Add	*491.95*	
01 22 23 00-0740	MO	100.0 KW, 60 Hertz Towable Diesel Powered Generator Set Note: Fuel consumption: 100% load - 7.4 gallons per hour, 75% load - 5.8 gallons per hour, 50% load - 4.1 gallons per hour.	4,247.96	
		For >160 To 320 Hours Usage Per Month, Add	*1,699.18*	
		For >320 Hours Usage Per Month, Add	*3,398.37*	
		For >6 Months (>26 Weeks), Deduct	*-169.92*	
		For Tier 4 Diesel Generator, Add	*1,338.11*	
01 22 23 00-0741	DAY	120.0 KW, 60 Hertz Towable Diesel Powered Generator Set Note: Fuel consumption: 100% load - 8.7 gallons per hour, 75% load - 6.8 gallons per hour, 50% load - 4.8 gallons per hour.	655.94	
		For >8 To 16 Hours Usage Per Day, Add	*262.38*	
		For >16 To 24 Hours Usage Per Day, Add	*524.75*	
		For Tier 4 Diesel Generator, Add	*206.62*	
01 22 23 00-0742	WK	120.0 KW, 60 Hertz Towable Diesel Powered Generator Set Note: Fuel consumption: 100% load - 8.7 gallons per hour, 75% load - 6.8 gallons per hour, 50% load - 4.8 gallons per hour.	1,811.63	
		For >40 To 80 Hours Usage Per Week, Add	*724.65*	
		For >80 Hours Usage Per Week, Add	*1,449.30*	
		For Tier 4 Diesel Generator, Add	*570.66*	
01 22 23 00-0743	MO	120.0 KW, 60 Hertz Towable Diesel Powered Generator Set Note: Fuel consumption: 100% load - 8.7 gallons per hour, 75% load - 6.8 gallons per hour, 50% load - 4.8 gallons per hour.	4,872.66	
		For >160 To 320 Hours Usage Per Month, Add	*1,949.06*	
		For >320 Hours Usage Per Month, Add	*3,898.13*	
		For >6 Months (>26 Weeks), Deduct	*-194.91*	
		For Tier 4 Diesel Generator, Add	*1,534.89*	
01 22 23 00-0744	DAY	140.0 KW, 60 Hertz Towable Diesel Powered Generator Set Note: Fuel consumption: 100% load - 10.2 gallons per hour, 75% load - 7.9 gallons per hour, 50% load - 5.6 gallons per hour.	687.17	
		For >8 To 16 Hours Usage Per Day, Add	*274.87*	
		For >16 To 24 Hours Usage Per Day, Add	*549.74*	
		For Tier 4 Diesel Generator, Add	*216.46*	
01 22 23 00-0745	WK	140.0 KW, 60 Hertz Towable Diesel Powered Generator Set Note: Fuel consumption: 100% load - 10.2 gallons per hour, 75% load - 7.9 gallons per hour, 50% load - 5.6 gallons per hour.	1,905.34	
		For >40 To 80 Hours Usage Per Week, Add	*762.14*	
		For >80 Hours Usage Per Week, Add	*1,524.27*	
		For Tier 4 Diesel Generator, Add	*600.18*	
01 22 23 00-0746	MO	140.0 KW, 60 Hertz Towable Diesel Powered Generator Set Note: Fuel consumption: 100% load - 10.2 gallons per hour, 75% load - 7.9 gallons per hour, 50% load - 5.6 gallons per hour.	5,372.42	
		For >160 To 320 Hours Usage Per Month, Add	*2,148.97*	
		For >320 Hours Usage Per Month, Add	*4,297.94*	
		For >6 Months (>26 Weeks), Deduct	*-214.90*	
		For Tier 4 Diesel Generator, Add	*1,692.31*	
01 22 23 00-0747	DAY	150.0 KW, 60 Hertz Towable Diesel Powered Generator Set Note: Fuel consumption: 100% load - 10.9 gallons per hour, 75% load - 8.4 gallons per hour, 50% load - 5.9 gallons per hour.	718.40	
		For >8 To 16 Hours Usage Per Day, Add	*287.36*	
		For >16 To 24 Hours Usage Per Day, Add	*574.72*	
		For Tier 4 Diesel Generator, Add	*226.30*	
01 22 23 00-0748	WK	150.0 KW, 60 Hertz Towable Diesel Powered Generator Set Note: Fuel consumption: 100% load - 10.9 gallons per hour, 75% load - 8.4 gallons per hour, 50% load - 5.9 gallons per hour.	2,061.51	
		For >40 To 80 Hours Usage Per Week, Add	*824.60*	
		For >80 Hours Usage Per Week, Add	*1,649.21*	
		For Tier 4 Diesel Generator, Add	*649.38*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-0749	MO	150.0 KW, 60 Hertz Towable Diesel Powered Generator Set	5,622.30	
		Note: Fuel consumption: 100% load - 10.9 gallons per hour, 75% load - 8.4 gallons per hour, 50% load - 5.9 gallons per hour.		
		For >160 To 320 Hours Usage Per Month, Add	*2,248.92*	
		For >320 Hours Usage Per Month, Add	*4,497.84*	
		For >6 Months (>26 Weeks), Deduct	*-224.89*	
		For Tier 4 Diesel Generator, Add	*1,771.02*	
01 22 23 00-0750	DAY	160.0 KW, 60 Hertz Towable Diesel Powered Generator Set	749.64	
		Note: Fuel consumption: 100% load - 11.6 gallons per hour, 75% load - 8.9 gallons per hour, 50% load - 6.2 gallons per hour.		
		For >8 To 16 Hours Usage Per Day, Add	*299.86*	
		For >16 To 24 Hours Usage Per Day, Add	*599.71*	
		For Tier 4 Diesel Generator, Add	*236.14*	
01 22 23 00-0751	WK	160.0 KW, 60 Hertz Towable Diesel Powered Generator Set	2,186.45	
		Note: Fuel consumption: 100% load - 11.6 gallons per hour, 75% load - 8.9 gallons per hour, 50% load - 6.2 gallons per hour.		
		For >40 To 80 Hours Usage Per Week, Add	*874.58*	
		For >80 Hours Usage Per Week, Add	*1,749.16*	
		For Tier 4 Diesel Generator, Add	*688.73*	
01 22 23 00-0752	MO	160.0 KW, 60 Hertz Towable Diesel Powered Generator Set	5,872.18	
		Note: Fuel consumption: 100% load - 11.6 gallons per hour, 75% load - 8.9 gallons per hour, 50% load - 6.2 gallons per hour.		
		For >160 To 320 Hours Usage Per Month, Add	*2,348.87*	
		For >320 Hours Usage Per Month, Add	*4,697.74*	
		For >6 Months (>26 Weeks), Deduct	*-234.89*	
		For Tier 4 Diesel Generator, Add	*1,849.74*	
01 22 23 00-0753	DAY	175.0 KW, 60 Hertz Towable Diesel Powered Generator Set	749.64	
		Note: Fuel consumption: 100% load - 12.7 gallons per hour, 75% load - 9.7 gallons per hour, 50% load - 6.8 gallons per hour.		
		For >8 To 16 Hours Usage Per Day, Add	*299.86*	
		For >16 To 24 Hours Usage Per Day, Add	*599.71*	
		For Tier 4 Diesel Generator, Add	*236.14*	
01 22 23 00-0754	WK	175.0 KW, 60 Hertz Towable Diesel Powered Generator Set	2,186.45	
		Note: Fuel consumption: 100% load - 12.7 gallons per hour, 75% load - 9.7 gallons per hour, 50% load - 6.8 gallons per hour.		
		For >40 To 80 Hours Usage Per Week, Add	*874.58*	
		For >80 Hours Usage Per Week, Add	*1,749.16*	
		For Tier 4 Diesel Generator, Add	*688.73*	
01 22 23 00-0755	MO	175.0 KW, 60 Hertz Towable Diesel Powered Generator Set	5,872.18	
		Note: Fuel consumption: 100% load - 12.7 gallons per hour, 75% load - 9.7 gallons per hour, 50% load - 6.8 gallons per hour.		
		For >160 To 320 Hours Usage Per Month, Add	*2,348.87*	
		For >320 Hours Usage Per Month, Add	*4,697.74*	
		For >6 Months (>26 Weeks), Deduct	*-234.89*	
		For Tier 4 Diesel Generator, Add	*1,849.74*	
01 22 23 00-0756	DAY	200.0 KW, 60 Hertz Towable Diesel Powered Generator Set	1,030.76	
		Note: Fuel consumption: 100% load - 14.4 gallons per hour, 75% load - 11.0 gallons per hour, 50% load - 7.7 gallons per hour.		
		For >8 To 16 Hours Usage Per Day, Add	*412.30*	
		For >16 To 24 Hours Usage Per Day, Add	*824.61*	
		For Tier 4 Diesel Generator, Add	*324.69*	
01 22 23 00-0757	WK	200.0 KW, 60 Hertz Towable Diesel Powered Generator Set	2,561.27	
		Note: Fuel consumption: 100% load - 14.4 gallons per hour, 75% load - 11.0 gallons per hour, 50% load - 7.7 gallons per hour.		
		For >40 To 80 Hours Usage Per Week, Add	*1,024.51*	
		For >80 Hours Usage Per Week, Add	*2,049.02*	
		For Tier 4 Diesel Generator, Add	*806.80*	
01 22 23 00-0758	MO	200.0 KW, 60 Hertz Towable Diesel Powered Generator Set	7,496.40	
		Note: Fuel consumption: 100% load - 14.4 gallons per hour, 75% load - 11.0 gallons per hour, 50% load - 7.7 gallons per hour.		
		For >160 To 320 Hours Usage Per Month, Add	*2,998.56*	
		For >320 Hours Usage Per Month, Add	*5,997.12*	
		For >6 Months (>26 Weeks), Deduct	*-299.86*	
		For Tier 4 Diesel Generator, Add	*2,361.37*	
01 22 23 00-0759	DAY	250.0 KW, 60 Hertz Towable Diesel Powered Generator Set	1,093.22	
		Note: Fuel consumption: 100% load - 19.8 gallons per hour, 75% load - 12.3 gallons per hour, 50% load - 8.6 gallons per hour.		
		For >8 To 16 Hours Usage Per Day, Add	*437.29*	
		For >16 To 24 Hours Usage Per Day, Add	*874.58*	
		For Tier 4 Diesel Generator, Add	*295.17*	
01 22 23 00-0760	WK	250.0 KW, 60 Hertz Towable Diesel Powered Generator Set	2,623.74	
		Note: Fuel consumption: 100% load - 19.8 gallons per hour, 75% load - 12.3 gallons per hour, 50% load - 8.6 gallons per hour.		
		For >40 To 80 Hours Usage Per Week, Add	*1,049.50*	
		For >80 Hours Usage Per Week, Add	*2,098.99*	
		For Tier 4 Diesel Generator, Add	*708.41*	
01 22 23 00-0761	MO	250.0 KW, 60 Hertz Towable Diesel Powered Generator Set	7,746.28	
		Note: Fuel consumption: 100% load - 19.8 gallons per hour, 75% load - 12.3 gallons per hour, 50% load - 8.6 gallons per hour.		
		For >160 To 320 Hours Usage Per Month, Add	*3,098.51*	
		For >320 Hours Usage Per Month, Add	*6,197.02*	
		For >6 Months (>26 Weeks), Deduct	*-309.85*	
		For Tier 4 Diesel Generator, Add	*2,091.50*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-0762	DAY	275.0 KW, 60 Hertz Towable Diesel Powered Generator Set	1,155.70	
		Note: Fuel consumption: 100% load - 18.0 gallons per hour, 75% load - 13.6 gallons per hour, 50% load - 9.5 gallons per hour.		
		For >8 To 16 Hours Usage Per Day, Add	*462.28*	
		For >16 To 24 Hours Usage Per Day, Add	*924.56*	
		For Tier 4 Diesel Generator, Add	*312.04*	
01 22 23 00-0763	WK	275.0 KW, 60 Hertz Towable Diesel Powered Generator Set	2,686.21	
		Note: Fuel consumption: 100% load - 18.0 gallons per hour, 75% load - 13.6 gallons per hour, 50% load - 9.5 gallons per hour.		
		For >40 To 80 Hours Usage Per Week, Add	*1,074.48*	
		For >80 Hours Usage Per Week, Add	*2,148.97*	
		For Tier 4 Diesel Generator, Add	*725.28*	
01 22 23 00-0764	MO	275.0 KW, 60 Hertz Towable Diesel Powered Generator Set	7,996.16	
		Note: Fuel consumption: 100% load - 18.0 gallons per hour, 75% load - 13.6 gallons per hour, 50% load - 9.5 gallons per hour.		
		For >160 To 320 Hours Usage Per Month, Add	*3,198.46*	
		For >320 Hours Usage Per Month, Add	*6,396.93*	
		For >6 Months (>26 Weeks), Deduct	*-319.85*	
		For Tier 4 Diesel Generator, Add	*2,158.96*	
01 22 23 00-0765	DAY	300.0 KW, 60 Hertz Towable Diesel Powered Generator Set	1,193.18	
		Note: Fuel consumption: 100% load - 21.5 gallons per hour, 75% load - 16.1 gallons per hour, 50% load - 11.3 gallons per hour.		
		For >8 To 16 Hours Usage Per Day, Add	*477.27*	
		For >16 To 24 Hours Usage Per Day, Add	*954.54*	
		For Tier 4 Diesel Generator, Add	*322.16*	
01 22 23 00-0766	WK	300.0 KW, 60 Hertz Towable Diesel Powered Generator Set	2,873.62	
		Note: Fuel consumption: 100% load - 21.5 gallons per hour, 75% load - 16.1 gallons per hour, 50% load - 11.3 gallons per hour.		
		For >40 To 80 Hours Usage Per Week, Add	*1,149.45*	
		For >80 Hours Usage Per Week, Add	*2,298.90*	
		For Tier 4 Diesel Generator, Add	*775.88*	
01 22 23 00-0767	MO	300.0 KW, 60 Hertz Towable Diesel Powered Generator Set	8,495.92	
		Note: Fuel consumption: 100% load - 21.5 gallons per hour, 75% load - 16.1 gallons per hour, 50% load - 11.3 gallons per hour.		
		For >160 To 320 Hours Usage Per Month, Add	*3,398.37*	
		For >320 Hours Usage Per Month, Add	*6,796.74*	
		For >6 Months (>26 Weeks), Deduct	*-339.84*	
		For Tier 4 Diesel Generator, Add	*2,293.90*	
01 22 23 00-0768	DAY	350.0 KW, 60 Hertz Towable Diesel Powered Generator Set	1,249.40	
		Note: Fuel consumption: 100% load - 25.1 gallons per hour, 75% load - 18.7 gallons per hour, 50% load - 13.1 gallons per hour.		
		For >8 To 16 Hours Usage Per Day, Add	*499.76*	
		For >16 To 24 Hours Usage Per Day, Add	*999.52*	
		For Tier 4 Diesel Generator, Add	*337.34*	
01 22 23 00-0769	WK	350.0 KW, 60 Hertz Towable Diesel Powered Generator Set	3,248.44	
		Note: Fuel consumption: 100% load - 25.1 gallons per hour, 75% load - 18.7 gallons per hour, 50% load - 13.1 gallons per hour.		
		For >40 To 80 Hours Usage Per Week, Add	*1,299.38*	
		For >80 Hours Usage Per Week, Add	*2,598.75*	
		For Tier 4 Diesel Generator, Add	*877.08*	
01 22 23 00-0770	MO	350.0 KW, 60 Hertz Towable Diesel Powered Generator Set	9,370.50	
		Note: Fuel consumption: 100% load - 25.1 gallons per hour, 75% load - 18.7 gallons per hour, 50% load - 13.1 gallons per hour.		
		For >160 To 320 Hours Usage Per Month, Add	*3,748.20*	
		For >320 Hours Usage Per Month, Add	*7,496.40*	
		For >6 Months (>26 Weeks), Deduct	*-374.82*	
		For Tier 4 Diesel Generator, Add	*2,530.04*	
01 22 23 00-0771	DAY	400.0 KW, 60 Hertz Towable Diesel Powered Generator Set	2,108.92	
		Note: Fuel consumption: 100% load - 28.6 gallons per hour, 75% load - 21.3 gallons per hour, 50% load - 14.9 gallons per hour.		
		For >8 To 16 Hours Usage Per Day, Add	*843.57*	
		For >16 To 24 Hours Usage Per Day, Add	*1,687.14*	
		For Tier 4 Diesel Generator, Add	*569.41*	
01 22 23 00-0772	WK	400.0 KW, 60 Hertz Towable Diesel Powered Generator Set	5,452.56	
		Note: Fuel consumption: 100% load - 28.6 gallons per hour, 75% load - 21.3 gallons per hour, 50% load - 14.9 gallons per hour.		
		For >40 To 80 Hours Usage Per Week, Add	*2,181.02*	
		For >80 Hours Usage Per Week, Add	*4,362.05*	
		For Tier 4 Diesel Generator, Add	*1,472.19*	
01 22 23 00-0773	MO	400.0 KW, 60 Hertz Towable Diesel Powered Generator Set	14,420.00	
		Note: Fuel consumption: 100% load - 28.6 gallons per hour, 75% load - 21.3 gallons per hour, 50% load - 14.9 gallons per hour.		
		For >160 To 320 Hours Usage Per Month, Add	*5,768.00*	
		For >320 Hours Usage Per Month, Add	*11,536.00*	
		For >6 Months (>26 Weeks), Deduct	*-576.80*	
		For Tier 4 Diesel Generator, Add	*3,893.40*	
01 22 23 00-0774	DAY	500.0 KW, 60 Hertz Container Diesel Powered Generator Set	2,703.75	
		Note: Fuel consumption: 100% load - 35.7 gallons per hour, 75% load - 26.4 gallons per hour, 50% load - 18.5 gallons per hour.		
		For >8 To 16 Hours Usage Per Day, Add	*1,081.50*	
		For >16 To 24 Hours Usage Per Day, Add	*2,163.00*	
		For Tier 4 Diesel Generator, Add	*730.01*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-0775	WK	500.0 KW, 60 Hertz Container Diesel Powered Generator Set Note: Fuel consumption: 100% load - 35.7 gallons per hour, 75% load - 26.4 gallons per hour, 50% load - 18.5 gallons per hour.	7,029.75	
		For >40 To 80 Hours Usage Per Week, Add	*2,811.90*	
		For >80 Hours Usage Per Week, Add	*5,623.80*	
		For Tier 4 Diesel Generator, Add	*1,898.03*	
01 22 23 00-0776	MO	500.0 KW, 60 Hertz Container Diesel Powered Generator Set Note: Fuel consumption: 100% load - 35.7 gallons per hour, 75% load - 26.4 gallons per hour, 50% load - 18.5 gallons per hour.	16,222.50	
		For >160 To 320 Hours Usage Per Month, Add	*6,489.00*	
		For >320 Hours Usage Per Month, Add	*12,978.00*	
		For >6 Months (>26 Weeks), Deduct	*-648.90*	
		For Tier 4 Diesel Generator, Add	*4,380.08*	
01 22 23 00-0777	DAY	640.0 KW, 60 Hertz Container Diesel Powered Generator Set Note: Fuel consumption: 100% load - 45.6 gallons per hour, 75% load - 33.5 gallons per hour, 50% load - 20.8 gallons per hour.	3,343.64	
		For >8 To 16 Hours Usage Per Day, Add	*1,337.46*	
		For >16 To 24 Hours Usage Per Day, Add	*2,674.91*	
		For Tier 4 Diesel Generator, Add	*819.19*	
01 22 23 00-0778	WK	640.0 KW, 60 Hertz Container Diesel Powered Generator Set Note: Fuel consumption: 100% load - 45.6 gallons per hour, 75% load - 33.5 gallons per hour, 50% load - 20.8 gallons per hour.	8,832.25	
		For >40 To 80 Hours Usage Per Week, Add	*3,532.90*	
		For >80 Hours Usage Per Week, Add	*7,065.80*	
		For Tier 4 Diesel Generator, Add	*2,163.90*	
01 22 23 00-0779	MO	640.0 KW, 60 Hertz Container Diesel Powered Generator Set Note: Fuel consumption: 100% load - 45.6 gallons per hour, 75% load - 33.5 gallons per hour, 50% load - 20.8 gallons per hour.	21,630.00	
		For >160 To 320 Hours Usage Per Month, Add	*8,652.00*	
		For >320 Hours Usage Per Month, Add	*17,304.00*	
		For >6 Months (>26 Weeks), Deduct	*-865.20*	
		For Tier 4 Diesel Generator, Add	*5,299.35*	
01 22 23 00-0780	DAY	750.0 KW, 60 Hertz Container Diesel Powered Generator Set Note: Fuel consumption: 100% load - 53.4 gallons per hour, 75% load - 39.3 gallons per hour, 50% load - 24.4 gallons per hour.	3,614.01	
		For >8 To 16 Hours Usage Per Day, Add	*1,445.60*	
		For >16 To 24 Hours Usage Per Day, Add	*2,891.21*	
		For Tier 4 Diesel Generator, Add	*885.43*	
01 22 23 00-0781	WK	750.0 KW, 60 Hertz Container Diesel Powered Generator Set Note: Fuel consumption: 100% load - 53.4 gallons per hour, 75% load - 39.3 gallons per hour, 50% load - 24.4 gallons per hour.	8,327.55	
		For >40 To 80 Hours Usage Per Week, Add	*3,331.02*	
		For >80 Hours Usage Per Week, Add	*6,662.04*	
		For Tier 4 Diesel Generator, Add	*2,040.25*	
01 22 23 00-0782	MO	750.0 KW, 60 Hertz Container Diesel Powered Generator Set Note: Fuel consumption: 100% load - 53.4 gallons per hour, 75% load - 39.3 gallons per hour, 50% load - 24.4 gallons per hour.	24,982.65	
		For >160 To 320 Hours Usage Per Month, Add	*9,993.06*	
		For >320 Hours Usage Per Month, Add	*19,986.12*	
		For >6 Months (>26 Weeks), Deduct	*-999.31*	
		For Tier 4 Diesel Generator, Add	*6,120.75*	
01 22 23 00-0783	DAY	1,000.0 KW, 60 Hertz Container Diesel Powered Generator Set Note: Includes 1,000 Gallon fuel tank. Fuel consumption: 100% load - 71.1 gallons per hour, 75% load - 52.1 gallons per hour, 50% load - 36.4 gallons per hour.	4,100.69	
		For >8 To 16 Hours Usage Per Day, Add	*1,640.28*	
		For >16 To 24 Hours Usage Per Day, Add	*3,280.55*	
		For Tier 4 Diesel Generator, Add	*1,004.67*	
01 22 23 00-0784	WK	1,000.0 KW, 60 Hertz Container Diesel Powered Generator Set Note: Includes 1,000 Gallon fuel tank. Fuel consumption: 100% load - 71.1 gallons per hour, 75% load - 52.1 gallons per hour, 50% load - 36.4 gallons per hour.	10,715.86	
		For >40 To 80 Hours Usage Per Week, Add	*4,286.34*	
		For >80 Hours Usage Per Week, Add	*8,572.69*	
		For Tier 4 Diesel Generator, Add	*2,625.39*	
01 22 23 00-0785	MO	1,000.0 KW, 60 Hertz Container Diesel Powered Generator Set Note: Includes 1,000 Gallon fuel tank. Fuel consumption: 100% load - 71.1 gallons per hour, 75% load - 52.1 gallons per hour, 50% load - 36.4 gallons per hour.	29,353.71	
		For >160 To 320 Hours Usage Per Month, Add	*11,741.48*	
		For >320 Hours Usage Per Month, Add	*23,482.97*	
		For >6 Months (>26 Weeks), Deduct	*-1,174.15*	
		For Tier 4 Diesel Generator, Add	*7,191.66*	
01 22 23 00-0786	DAY	1,500.0 KW, 60 Hertz Container Diesel Powered Generator Set Note: Includes 1,000 Gallon fuel tank. Fuel consumption: 100% load - 106.5 gallons per hour, 75% load - 77.8 gallons per hour, 50% load - 54.3 gallons per hour.	5,407.50	
		For >8 To 16 Hours Usage Per Day, Add	*2,163.00*	
		For >16 To 24 Hours Usage Per Day, Add	*4,326.00*	
		For Tier 4 Diesel Generator, Add	*1,000.39*	
01 22 23 00-0787	WK	1,500.0 KW, 60 Hertz Container Diesel Powered Generator Set Note: Includes 1,000 Gallon fuel tank. Fuel consumption: 100% load - 106.5 gallons per hour, 75% load - 77.8 gallons per hour, 50% load - 54.3 gallons per hour.	16,222.50	
		For >40 To 80 Hours Usage Per Week, Add	*6,489.00*	
		For >80 Hours Usage Per Week, Add	*12,978.00*	
		For Tier 4 Diesel Generator, Add	*3,001.16*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-0788	MO	1,500.0 KW, 60 Hertz Container Diesel Powered Generator Set Note: Includes 1,000 Gallon fuel tank. Fuel consumption: 100% load - 106.5 gallons per hour, 75% load - 77.8 gallons per hour, 50% load - 54.3 gallons per hour.	46,513.51	
		For >160 To 320 Hours Usage Per Month, Add	*18,605.40*	
		For >320 Hours Usage Per Month, Add	*37,210.81*	
		For Tier 4 Diesel Generator, Add	*8,605.00*	
01 22 23 00-0789	DAY	2,000.0 KW, 60 Hertz Container Diesel Powered Generator Set Note: Includes 1,000 Gallon fuel tank. Fuel consumption: 100% load - 141.9 gallons per hour, 75% load - 103.5 gallons per hour, 50% load - 72.2 gallons per hour.	7,128.89	
		For >8 To 16 Hours Usage Per Day, Add	*2,851.56*	
		For >16 To 24 Hours Usage Per Day, Add	*5,703.11*	
		For Tier 4 Diesel Generator, Add	*1,318.84*	
01 22 23 00-0790	WK	2,000.0 KW, 60 Hertz Container Diesel Powered Generator Set Note: Includes 1,000 Gallon fuel tank. Fuel consumption: 100% load - 141.9 gallons per hour, 75% load - 103.5 gallons per hour, 50% load - 72.2 gallons per hour.	17,826.72	
		For >40 To 80 Hours Usage Per Week, Add	*7,130.69*	
		For >80 Hours Usage Per Week, Add	*14,261.38*	
		For Tier 4 Diesel Generator, Add	*3,297.94*	
01 22 23 00-0791	MO	2,000.0 KW, 60 Hertz Container Diesel Powered Generator Set Note: Includes 1,000 Gallon fuel tank. Fuel consumption: 100% load - 141.9 gallons per hour, 75% load - 103.5 gallons per hour, 50% load - 72.2 gallons per hour.	48,667.50	
		For >160 To 320 Hours Usage Per Month, Add	*19,467.00*	
		For >320 Hours Usage Per Month, Add	*38,934.00*	
		For >6 Months (>26 Weeks), Deduct	*-1,946.70*	
		For Tier 4 Diesel Generator, Add	*9,003.49*	
01 22 23 00-0792	EA	Delivery, Set-up, Testing And Pick-up For Up To 160 KW Towable Generator Set Note: Includes set-up of generator accessories, cabling, load banks and distribution panels as required.	961.01	
01 22 23 00-0793	EA	Delivery, Set-up, Testing And Pick-up For 175 To 300 KW Towable Generator Set Note: Includes set-up of generator accessories, cabling, load banks and distribution panels as required.	1,304.07	
01 22 23 00-0794	EA	Delivery, Set-up, Testing And Pick-up For 350 To 450 KW Towable Generator Set Note: Includes set-up of generator accessories, cabling, load banks and distribution panels as required.	1,697.12	
01 22 23 00-0795	EA	Delivery, Set-up, Testing And Pick-up For 500 To 750 KW Towable Generator Set Note: Includes set-up of generator accessories, cabling, load banks and distribution panels as required.	2,149.25	
01 22 23 00-0796	EA	Delivery, Set-up, Testing And Pick-up For 1,000 To 2,000 KW Towable Generator Set Note: Includes set-up of generator accessories, cabling, load banks and distribution panels as required.	2,969.43	

01 22 23 00-0797 Cabling For Generator Sets *(01 22 23 00-0702)*

Note: Includes delivery to job site and pick-up when complete.

01 22 23 00-0798	DAY	#1 Banded Cable, 50' With Camlock Ends For Generator Set	27.49	
		For Half Day Usage, Deduct	*-8.59*	
01 22 23 00-0799	WK	#1 Banded Cable, 50' With Camlock Ends For Generator Set	48.10	
01 22 23 00-0800	MO	#1 Banded Cable, 50' With Camlock Ends For Generator Set	144.31	
		For >6 Months (>26 Weeks), Deduct	*-5.77*	
01 22 23 00-0801	DAY	50', 4/0 Cable With Camlock Ends For Generator Set	13.74	
		For Half Day Usage, Deduct	*-4.29*	
01 22 23 00-0802	WK	50', 4/0 Cable With Camlock Ends For Generator Set	39.98	
01 22 23 00-0803	MO	50', 4/0 Cable With Camlock Ends For Generator Set	111.20	
		For >6 Months (>26 Weeks), Deduct	*-4.45*	

01 22 23 00-0804 Generator Accessories *(01 22 23 00-0702)*

Note: Includes delivery to job site and pick-up when complete.

01 22 23 00-0805 Step Down Transformer *(01 22 23 00-0804)*

01 22 23 00-0806	WK	75 KVA, 480-208 Volt, Step Down Transformer	368.57	
01 22 23 00-0807	MO	75 KVA, 480-208 Volt, Step Down Transformer	1,030.76	
		For >6 Months (>26 Weeks), Deduct	*-41.23*	
01 22 23 00-0808	WK	150 KVA, 480-208 Volt, Step Down Transformer	590.97	
01 22 23 00-0809	MO	150 KVA, 480-208 Volt, Step Down Transformer	1,771.65	
		For >6 Months (>26 Weeks), Deduct	*-70.87*	
01 22 23 00-0810	WK	225 KVA, 480-208 Volt, Step Down Transformer	787.12	
01 22 23 00-0811	MO	225 KVA, 480-208 Volt, Step Down Transformer	2,361.37	
		For >6 Months (>26 Weeks), Deduct	*-94.45*	
01 22 23 00-0812	WK	500 KVA, 480-208 Volt, Step Down Transformer	937.05	
01 22 23 00-0813	MO	500 KVA, 480-208 Volt, Step Down Transformer	2,811.15	
		For >6 Months (>26 Weeks), Deduct	*-112.45*	
01 22 23 00-0814	WK	1,000 KVA, 4,160/480 Volt, Step Down Transformer	1,399.33	
01 22 23 00-0815	MO	1,000 KVA, 4,160/480 Volt, Step Down Transformer	4,179.24	
		For >6 Months (>26 Weeks), Deduct	*-167.17*	
01 22 23 00-0816	WK	1,500 KVA, 4,160/480 Volt, Step Down Transformer	2,273.91	
01 22 23 00-0817	MO	1,500 KVA, 4,160/480 Volt, Step Down Transformer	6,815.48	
		For >6 Months (>26 Weeks), Deduct	*-272.62*	
01 22 23 00-0818	WK	2,500 KVA, 480-13,800/4,160 Volt, Step Down Transformer	2,623.74	
01 22 23 00-0819	MO	2,500 KVA, 480-13,800/4,160 Volt, Step Down Transformer	7,871.22	
		For >6 Months (>26 Weeks), Deduct	*-314.85*	

01 22 23 00-0820 Portable Panel *(01 22 23 00-0804)*

01 22 23 00-0821	WK	100 Amperes, Portable Panel	293.61	
01 22 23 00-0822	MO	100 Amperes, Portable Panel	749.64	
		For >6 Months (>26 Weeks), Deduct	*-29.99*	
01 22 23 00-0823	WK	200 Amperes, Portable Panel	351.08	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-0824	MO	200 Amperes, Portable Panel	937.05	
		For >6 Months (>26 Weeks), Deduct	*-37.48*	
01 22 23 00-0825	WK	400 Amperes, Portable Panel	374.82	
01 22 23 00-0826	MO	400 Amperes, Portable Panel	1,124.46	
		For >6 Months (>26 Weeks), Deduct	*-44.98*	

01 22 23 00-0827 Portable Fusible Disconnect *(01 22 23 00-0804)*

01 22 23 00-0828	WK	100 - 200 Amperes, Portable Fusible Disconnect	131.19	
01 22 23 00-0829	MO	100 - 200 Amperes, Portable Fusible Disconnect	393.56	
		For >6 Months (>26 Weeks), Deduct	*-15.74*	
01 22 23 00-0830	WK	300 - 400 Amperes, Portable Fusible Disconnect	262.37	
01 22 23 00-0831	MO	300 - 400 Amperes, Portable Fusible Disconnect	787.12	
		For >6 Months (>26 Weeks), Deduct	*-31.48*	

01 22 23 00-0832 Portable Transfer Switch *(01 22 23 00-0804)*

01 22 23 00-0833	WK	100 Amperes, 480 Volt, Portable Transfer Switch	393.56	
01 22 23 00-0834	MO	100 Amperes, 480 Volt, Portable Transfer Switch	1,180.68	
		For >6 Months (>26 Weeks), Deduct	*-47.23*	
01 22 23 00-0835	WK	200 Amperes, 480 Volt, Portable Transfer Switch	524.75	
01 22 23 00-0836	MO	200 Amperes, 480 Volt, Portable Transfer Switch	1,574.24	
		For >6 Months (>26 Weeks), Deduct	*-62.97*	
01 22 23 00-0837	WK	400 Amperes, 480 Volt, Portable Transfer Switch	655.94	
01 22 23 00-0838	MO	400 Amperes, 480 Volt, Portable Transfer Switch	1,967.80	
		For >6 Months (>26 Weeks), Deduct	*-78.71*	

01 22 23 00-0839 Resistive Loadbanks For Generator Sets *(01 22 23 00-0702)*

Note: Includes delivery to job site and pick-up when complete. See CSI section 01 22 23 00-0890 for reimbursable fuel fees.

01 22 23 00-0840	DAY	100 KW A/C Resistive Load Bank	250.00	
01 22 23 00-0841	WK	100 KW A/C Resistive Load Bank	570.00	
01 22 23 00-0842	MO	100 KW A/C Resistive Load Bank	1,710.00	
		For >6 Months (>26 Weeks), Deduct	*-68.40*	
01 22 23 00-0843	DAY	250 KW A/C Resistive Load Bank	313.00	
01 22 23 00-0844	WK	250 KW A/C Resistive Load Bank	690.00	
01 22 23 00-0845	MO	250 KW A/C Resistive Load Bank	2,068.00	
01 22 23 00-0846	DAY	400 KW A/C Resistive Load Bank	390.00	
01 22 23 00-0847	WK	400 KW A/C Resistive Load Bank	835.00	
01 22 23 00-0848	MO	400 KW A/C Resistive Load Bank	2,505.00	
01 22 23 00-0849	DAY	500 KW A/C Resistive Load Bank	457.00	
01 22 23 00-0850	WK	500 KW A/C Resistive Load Bank	1,250.00	
01 22 23 00-0851	MO	500 KW A/C Resistive Load Bank	3,750.00	
01 22 23 00-0852	DAY	650 KW A/C Resistive Load Bank	517.00	
01 22 23 00-0853	WK	650 KW A/C Resistive Load Bank	1,565.00	
01 22 23 00-0854	MO	650 KW A/C Resistive Load Bank	4,695.00	
		For >6 Months (>26 Weeks), Deduct	*-187.80*	
01 22 23 00-0855	DAY	750 KW A/C Resistive Load Bank	549.00	
01 22 23 00-0856	WK	750 KW A/C Resistive Load Bank	1,733.00	
01 22 23 00-0857	MO	750 KW A/C Resistive Load Bank	5,199.00	
		For >6 Months (>26 Weeks), Deduct	*-207.96*	
01 22 23 00-0858	DAY	1,000 KW A/C Resistive Load Bank	597.00	
01 22 23 00-0859	WK	1,000 KW A/C Resistive Load Bank	1,985.00	
01 22 23 00-0860	MO	1,000 KW A/C Resistive Load Bank	5,955.00	
01 22 23 00-0861	DAY	1,250 KW A/C Resistive Load Bank	657.00	
01 22 23 00-0862	WK	1,250 KW A/C Resistive Load Bank	2,300.00	
01 22 23 00-0863	MO	1,250 KW A/C Resistive Load Bank	6,900.00	
01 22 23 00-0864	DAY	1,500 KW A/C Resistive Load Bank	1,191.00	
01 22 23 00-0865	WK	1,500 KW A/C Resistive Load Bank	4,096.00	
01 22 23 00-0866	MO	1,500 KW A/C Resistive Load Bank	13,337.00	
01 22 23 00-0867	DAY	2,000 KW A/C Resistive Load Bank	1,445.00	
01 22 23 00-0868	WK	2,000 KW A/C Resistive Load Bank	5,000.00	
01 22 23 00-0869	MO	2,000 KW A/C Resistive Load Bank	16,500.00	
01 22 23 00-0870	DAY	2,500 KW A/C Resistive Load Bank	1,964.00	
01 22 23 00-0871	WK	2,500 KW A/C Resistive Load Bank	6,875.00	
01 22 23 00-0872	MO	2,500 KW A/C Resistive Load Bank	20,625.00	
01 22 23 00-0873	DAY	3,000 KW A/C Resistive Load Bank	2,310.00	
01 22 23 00-0874	WK	3,000 KW A/C Resistive Load Bank	7,500.00	
01 22 23 00-0875	MO	3,000 KW A/C Resistive Load Bank	22,500.00	

01 22 23 00-0876 Sub-Distribution Panels (Spider Box) For Generator Sets *(01 22 23 00-0702)*

Note: Includes delivery to job site and pick-up when complete.

01 22 23 00-0877	DAY	50 Amperes, 240 Volt, Single Phase, Sub-Distribution Panel (Spider Box)	67.47	
		For Half Day Usage, Deduct	*-21.08*	
01 22 23 00-0878	WK	50 Amperes, 240 Volt, Single Phase, Sub-Distribution Panel (Spider Box)	174.92	
01 22 23 00-0879	MO	50 Amperes, 240 Volt, Single Phase, Sub-Distribution Panel (Spider Box)	493.51	
		For >6 Months (>26 Weeks), Deduct	*-19.74*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

01 22 23 00-0880 Portable Distribution Panels For Generator Sets *(01 22 23 00-0702)*

Note: Includes delivery to job site and pick-up when complete.

01 22 23 00-0881	DAY	200 Amperes, 208 Volt, 3 Phase, Portable Spider Box Feeder Panel	149.93
		For Half Day Usage, Deduct	*-46.85*
01 22 23 00-0882	WK	200 Amperes, 208 Volt, 3 Phase, Portable Spider Box Feeder Panel	406.06
01 22 23 00-0883	MO	200 Amperes, 208 Volt, 3 Phase, Portable Spider Box Feeder Panel	1,136.95
		For >6 Months (>26 Weeks), Deduct	*-45.48*
01 22 23 00-0884	DAY	100 Amperes, 208 Volt, 3 Phase, Portable Quad Box Panel	122.44
		For Half Day Usage, Deduct	*-38.26*
01 22 23 00-0885	WK	100 Amperes, 208 Volt, 3 Phase, Portable Quad Box Panel	318.60
01 22 23 00-0886	MO	100 Amperes, 208 Volt, 3 Phase, Portable Quad Box Panel	905.82
		For >6 Months (>26 Weeks), Deduct	*-36.23*
01 22 23 00-0887	DAY	200 Amperes, 208 Volt, 3 Phase, Portable Quad Box Panel	156.18
		For Half Day Usage, Deduct	*-48.81*
01 22 23 00-0888	WK	200 Amperes, 208 Volt, 3 Phase, Portable Quad Box Panel	393.56
01 22 23 00-0889	MO	200 Amperes, 208 Volt, 3 Phase, Portable Quad Box Panel	1,068.24
		For >6 Months (>26 Weeks), Deduct	*-42.73*

01 22 23 00-0890 Fuel Reimbursement For Generators *(01 22 23 00-0702)*

01 22 23 00-0891	EA	Fuel Reimbursement For Generators	1.00

Note: Purchases made by the contractor for fuel will be reimbursed to the Contractor at the actual cost of the purchase, without mark-up, for which a receipt or bill is received. The Adjustment Factor applied to Reimbursable Fees will be 1.0000. The base cost of the purchase is $1.00, quantity will adjust cost to actual purchase cost; i.e., quantity of 125 = $125.00 purchase. If there are multiple purchases, each one shall be listed separately with a comment in the "note" block to identify the purchase.

01 22 23 00-0892 Portable Floor Drying Fans *(01 22 23 00-0687)*

Note: Includes delivery to job site and pick-up when complete. Excludes operator.

01 22 23 00-0893	DAY	2,250 CFM Portable Floor Drying Fan	23.26
		For Half Day Usage, Deduct	*-7.27*
01 22 23 00-0894	WK	2,250 CFM Portable Floor Drying Fan	107.60
01 22 23 00-0895	MO	2,250 CFM Portable Floor Drying Fan	356.23
		For >6 Months (>26 Weeks), Deduct	*-14.25*

01 22 23 00-0896 Welding Machines *(01 22 23 00-0687)*

Note: Includes delivery to job site and pick-up when complete. Excludes operator.

01 22 23 00-0897 CC/CV Inverter Welder *(01 22 23 00-0896)*

Note: Excludes cables, operator and fuel costs. See CSI section 01 22 23 00-0890 for reimbursable fuel fees.

01 22 23 00-0898	DAY	250 Amperes, CC Inverter Welder	44.85
		For Half Day Usage, Deduct	*-14.02*
01 22 23 00-0899	WK	250 Amperes, CC Inverter Welder	97.72
01 22 23 00-0900	MO	250 Amperes, CC Inverter Welder	296.35
		For >6 Months (>26 Weeks), Deduct	*-11.85*
01 22 23 00-0901	DAY	300 Amperes, CC/CV Inverter Welder	51.26
		For Half Day Usage, Deduct	*-16.02*
01 22 23 00-0902	WK	300 Amperes, CC/CV Inverter Welder	136.16
01 22 23 00-0903	MO	300 Amperes, CC/CV Inverter Welder	360.43
		For >6 Months (>26 Weeks), Deduct	*-14.42*
01 22 23 00-0904	DAY	350 Amperes, CC/CV Inverter Welder	52.86
		For Half Day Usage, Deduct	*-16.52*
01 22 23 00-0905	WK	350 Amperes, CC/CV Inverter Welder	139.37
01 22 23 00-0906	MO	350 Amperes, CC/CV Inverter Welder	392.47
		For >6 Months (>26 Weeks), Deduct	*-15.70*

01 22 23 00-0907 MIG Welder *(01 22 23 00-0896)*

Note: Excludes cables, operator and fuel costs. See CSI section 01 22 23 00-0890 for reimbursable fuel fees.

01 22 23 00-0908	DAY	115 Volt MIG Welder	76.89
		For Half Day Usage, Deduct	*-24.03*
01 22 23 00-0909	WK	115 Volt MIG Welder	200.24
01 22 23 00-0910	MO	115 Volt MIG Welder	544.65
		For >6 Months (>26 Weeks), Deduct	*-21.79*

01 22 23 00-0911 Diesel Powered Towable Welding Machines *(01 22 23 00-0896)*

Note: Includes delivery to job site and pick-up when complete. Excludes operator.

01 22 23 00-0912	DAY	250 To 299 Amperes, Diesel Powered Towable Welding Machine	144.17
		For Half Day Usage, Deduct	*-45.05*
01 22 23 00-0913	WK	250 To 299 Amperes, Diesel Powered Towable Welding Machine	352.42
01 22 23 00-0914	MO	250 To 299 Amperes, Diesel Powered Towable Welding Machine	841.00
		For >6 Months (>26 Weeks), Deduct	*-33.64*
01 22 23 00-0915	DAY	300 To 349 Amperes, Diesel Powered Towable Welding Machine	192.23
		For Half Day Usage, Deduct	*-60.07*
01 22 23 00-0916	WK	300 To 349 Amperes, Diesel Powered Towable Welding Machine	376.45
01 22 23 00-0917	MO	300 To 349 Amperes, Diesel Powered Towable Welding Machine	879.44
		For >6 Months (>26 Weeks), Deduct	*-35.18*
01 22 23 00-0918	DAY	350 To 399 Amperes, Diesel Powered Towable Welding Machine	200.24
		For Half Day Usage, Deduct	*-62.58*
01 22 23 00-0919	WK	350 To 399 Amperes, Diesel Powered Towable Welding Machine	400.48

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-0920	MO	350 To 399 Amperes, Diesel Powered Towable Welding Machine	977.16	
		For >6 Months (>26 Weeks), Deduct	*-39.09*	

01 22 23 00-0921 General Equipment *(01 22 23)*

01 22 23 00-0922 Torch Burning *(01 22 23 00-0921)*

Note: Includes delivery to job site, set-up, pick-up when complete and full time operator.

01 22 23 00-0923	DAY	Torch Burning Package With Full Time Operator	998.26	
		Note: Includes torch set, regulator, hoses, oxygen tank and acetylene tank.		
		For Half Day Usage, Deduct	*-491.62*	
		For Equipment Without Operator, Deduct	*-958.21*	
01 22 23 00-0924	WK	Torch Burning Package With Full Time Operator	4,911.19	
		Note: Includes torch set, regulator, hoses, oxygen tank and acetylene tank.		
		For Equipment Without Operator, Deduct	*-4,791.05*	
01 22 23 00-0925	MO	Torch Burning Package With Full Time Operator	21,121.61	
		Note: Includes torch set, regulator, hoses, oxygen tank and acetylene tank.		
		For >6 Months (>26 Weeks), Deduct	*-14.42*	
		For Equipment Without Operator, Deduct	*-20,761.18*	

01 22 23 00-0926 Jacks And Bracing *(01 22 23 00-0921)*

Note: Includes delivery to job site and pick-up when complete.

01 22 23 00-0927 Manual Hydraulic Jacks *(01 22 23 00-0926)*

01 22 23 00-0928	DAY	12 Ton Manual Hydraulic Bottle Jack	1.67	
		For Half Day Usage, Deduct	*-0.52*	
01 22 23 00-0929	WK	12 Ton Manual Hydraulic Bottle Jack	7.93	
01 22 23 00-0930	MO	12 Ton Manual Hydraulic Bottle Jack	28.50	
		For >6 Months (>26 Weeks), Deduct	*-1.14*	
01 22 23 00-0931	DAY	20 Ton Manual Hydraulic Bottle Jack	2.92	
		For Half Day Usage, Deduct	*-0.91*	
01 22 23 00-0932	WK	20 Ton Manual Hydraulic Bottle Jack	9.18	
01 22 23 00-0933	MO	20 Ton Manual Hydraulic Bottle Jack	34.76	
		For >6 Months (>26 Weeks), Deduct	*-1.39*	
01 22 23 00-0934	DAY	50 Ton Manual Hydraulic Bottle Jack	10.43	
		For Half Day Usage, Deduct	*-3.26*	
01 22 23 00-0935	WK	50 Ton Manual Hydraulic Bottle Jack	40.49	
01 22 23 00-0936	MO	50 Ton Manual Hydraulic Bottle Jack	145.66	
		For >6 Months (>26 Weeks), Deduct	*-5.83*	
01 22 23 00-0937	DAY	100 Ton Manual Hydraulic Bottle Jack	14.61	
		For Half Day Usage, Deduct	*-4.57*	
01 22 23 00-0938	WK	100 Ton Manual Hydraulic Bottle Jack	58.43	
01 22 23 00-0939	MO	100 Ton Manual Hydraulic Bottle Jack	210.46	
		For >6 Months (>26 Weeks), Deduct	*-8.42*	

01 22 23 00-0940 Manual Screw Jacks *(01 22 23 00-0926)*

01 22 23 00-0941	DAY	10 To 20 Ton Manual Screw Jack	19.16	
		For Half Day Usage, Deduct	*-5.99*	
01 22 23 00-0942	WK	10 To 20 Ton Manual Screw Jack	50.71	
01 22 23 00-0943	MO	10 To 20 Ton Manual Screw Jack	152.12	
		For >6 Months (>26 Weeks), Deduct	*-6.08*	

01 22 23 00-0944 Shores/Braces *(01 22 23 00-0926)*

01 22 23 00-0945	MO	Up To 5' Height, Adjustable Tubular Steel Shoring	15.78	
01 22 23 00-0946	MO	Up To 10' Height, Adjustable Tubular Steel Shoring	20.28	
01 22 23 00-0947	MO	>10' To 16' Height, Adjustable Tubular Steel Shoring	27.04	
01 22 23 00-0948	MO	Up To 10' Height, Adjustable Wood Shoring	6.42	
01 22 23 00-0949	MO	>10' To 16' Height, Adjustable Wood Shoring	8.56	
01 22 23 00-0950	EA	Erect And Strip Shores To 10'	11.99	
		For >20 To 50, Deduct	*-1.80*	
		For >50 To 100, Deduct	*-4.20*	
		For >100, Deduct	*-6.59*	
01 22 23 00-0951	EA	Erect And Strip Shores To 13'	14.39	
		For >20 To 50, Deduct	*-2.16*	
		For >50 To 100, Deduct	*-5.04*	
		For >100, Deduct	*-7.91*	
01 22 23 00-0952	EA	Erect And Strip Shores To 16'	16.78	
		For >20 To 50, Deduct	*-2.52*	
		For >50 To 100, Deduct	*-5.87*	
		For >100, Deduct	*-9.23*	

01 22 23 00-0953 Pressure Washers *(01 22 23 00-0921)*

Note: Includes delivery to job site, pick-up when complete and full time operator.

01 22 23 00-0954	DAY	2,000 PSI Pressure Washer With Full-Time Operator	872.29	
		For Equipment Without Operator, Deduct	*-762.33*	
		For Half Day Usage, Deduct	*-415.53*	
01 22 23 00-0955	WK	2,000 PSI Pressure Washer With Full-Time Operator	4,090.79	
		For Equipment Without Operator, Deduct	*-3,811.66*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-0956	MO	2,000 PSI Pressure Washer With Full-Time Operator	17,227.69	
		For Equipment Without Operator, Deduct	*-16,517.18*	
		For >6 Months (>26 Weeks), Deduct	*-28.42*	
01 22 23 00-0957	DAY	2,500 PSI Pressure Washer With Full-Time Operator	872.29	
		For Equipment Without Operator, Deduct	*-762.33*	
		For Half Day Usage, Deduct	*-415.53*	
01 22 23 00-0958	WK	2,500 PSI Pressure Washer With Full-Time Operator	4,090.79	
		For Equipment Without Operator, Deduct	*-3,811.66*	
01 22 23 00-0959	MO	2,500 PSI Pressure Washer With Full-Time Operator	17,227.69	
		For Equipment Without Operator, Deduct	*-16,517.18*	
		For >6 Months (>26 Weeks), Deduct	*-28.42*	
01 22 23 00-0960	DAY	3,000 PSI Pressure Washer With Full-Time Operator	872.29	
		For Equipment Without Operator, Deduct	*-762.33*	
		For Half Day Usage, Deduct	*-415.53*	
01 22 23 00-0961	WK	3,000 PSI Pressure Washer With Full-Time Operator	4,090.79	
		For Equipment Without Operator, Deduct	*-3,811.66*	
01 22 23 00-0962	MO	3,000 PSI Pressure Washer With Full-Time Operator	17,227.69	
		For Equipment Without Operator, Deduct	*-16,517.18*	
		For >6 Months (>26 Weeks), Deduct	*-28.42*	
01 22 23 00-0963	DAY	3,500 PSI Pressure Washer With Full-Time Operator	880.75	
		For Equipment Without Operator, Deduct	*-762.33*	
		For Half Day Usage, Deduct	*-418.17*	
01 22 23 00-0964	WK	3,500 PSI Pressure Washer With Full-Time Operator	4,116.17	
		For Equipment Without Operator, Deduct	*-3,811.66*	
01 22 23 00-0965	MO	3,500 PSI Pressure Washer With Full-Time Operator	17,295.36	
		For Equipment Without Operator, Deduct	*-16,517.18*	
		For >6 Months (>26 Weeks), Deduct	*-31.13*	
01 22 23 00-0966	DAY	4,000 PSI Pressure Washer With Full-Time Operator	914.58	
		For Equipment Without Operator, Deduct	*-762.33*	
		For Half Day Usage, Deduct	*-428.74*	
01 22 23 00-0967	WK	4,000 PSI Pressure Washer With Full-Time Operator	4,226.13	
		For Equipment Without Operator, Deduct	*-3,811.66*	
01 22 23 00-0968	MO	4,000 PSI Pressure Washer With Full-Time Operator	17,675.99	
		For Equipment Without Operator, Deduct	*-16,517.18*	
		For >6 Months (>26 Weeks), Deduct	*-46.35*	
01 22 23 00-0969	DAY	5,000 PSI Pressure Washer With Full-Time Operator	931.50	
		For Equipment Without Operator, Deduct	*-762.33*	
		For Half Day Usage, Deduct	*-434.03*	
01 22 23 00-0970	WK	5,000 PSI Pressure Washer With Full-Time Operator	4,268.42	
		For Equipment Without Operator, Deduct	*-3,811.66*	
01 22 23 00-0971	MO	5,000 PSI Pressure Washer With Full-Time Operator	17,802.87	
		For Equipment Without Operator, Deduct	*-16,517.18*	
		For >6 Months (>26 Weeks), Deduct	*-51.43*	

01 22 23 00-0972 Confined Space Entry Equipment *(01 22 23 00-0921)*

Note: Includes delivery to job site, set-up, and pick-up when complete.

01 22 23 00-0973	DAY	Ventilation Equipment For Confined Space Note: Includes electric or gas blower and ventilation duct up to 25'.	43.28	
		For Half Day Usage, Deduct	*-13.53*	
01 22 23 00-0974	WK	Ventilation Equipment For Confined Space Note: Includes electric or gas blower and ventilation duct up to 25'.	129.84	
01 22 23 00-0975	MO	Ventilation Equipment For Confined Space Note: Includes electric or gas blower and ventilation duct up to 25'.	387.47	
		For >6 Months (>26 Weeks), Deduct	*-15.50*	
01 22 23 00-0976	DAY	Confined Space Air Monitor, Tripod, Harness, Cables, SCBAs And Complete Assembly	67.81	
		For Half Day Usage, Deduct	*-21.19*	
01 22 23 00-0977	WK	Confined Space Air Monitor, Tripod, Harness, Cables, SCBAs And Complete Assembly	203.44	
01 22 23 00-0978	MO	Confined Space Air Monitor, Tripod, Harness, Cables, SCBAs And Complete Assembly	610.31	
		For >6 Months (>26 Weeks), Deduct	*-24.41*	
01 22 23 00-0979	DAY	Confined Space Air Monitor Personnel Note: Per person day.	762.33	
		For Half Day Usage, Deduct	*-381.17*	

01 22 23 00-0980 High Volume Vacuums *(01 22 23 00-0921)*

Note: Includes delivery to job site, set-up, pick-up when complete and full time operator.

01 22 23 00-0981	DAY	500 Gallon High Volume Vacuum With Full-Time Operator	1,606.40	
		For Equipment Without Operator, Deduct	*-1,004.52*	
		For Half Day Usage, Deduct	*-690.35*	
01 22 23 00-0982	WK	500 Gallon High Volume Vacuum With Full-Time Operator	6,707.84	
		For Equipment Without Operator, Deduct	*-5,022.59*	
01 22 23 00-0983	MO	500 Gallon High Volume Vacuum With Full-Time Operator	27,542.55	
		For >6 Months (>26 Weeks), Deduct	*-231.12*	
		For Equipment Without Operator, Deduct	*-21,764.55*	

01 22 23 00-0984 Portable Dehumidifiers *(01 22 23 00-0921)*

Note: Includes delivery to job site, set-up, and pick-up when complete. Excludes operator.

01 22 23 00-0985	DAY	7.5 To 10 Gallons Per Day, Portable Dehumidifier	187.14	
		For Half Day Usage, Deduct	*-58.48*	
01 22 23 00-0986	WK	7.5 To 10 Gallons Per Day, Portable Dehumidifier	601.52	
01 22 23 00-0987	MO	7.5 To 10 Gallons Per Day, Portable Dehumidifier	1,831.28	
		For >6 Months (>26 Weeks), Deduct	*-73.25*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-0988	DAY	16 To 25 Gallons Per Day, Portable Dehumidifier	334.18	
		For Half Day Usage, Deduct	*-104.43*	
01 22 23 00-0989	WK	16 To 25 Gallons Per Day, Portable Dehumidifier	1,002.52	
01 22 23 00-0990	MO	16 To 25 Gallons Per Day, Portable Dehumidifier	2,339.22	
		For >6 Months (>26 Weeks), Deduct	*-93.57*	
01 22 23 00-0991		**Portable Fume Extractors** *(01 22 23 00-0921)*		
		Note: Includes delivery to job site and pick-up when complete. Excludes operator.		
01 22 23 00-0992	DAY	Portable Fume Extractor	27.82	
		For Half Day Usage, Deduct	*-8.69*	
01 22 23 00-0993	WK	Portable Fume Extractor	83.47	
01 22 23 00-0994		**Direct Fired Space Heaters** *(01 22 23 00-0921)*		
		Note: Includes delivery to job site, set-up, and pick-up when complete. Excludes operator.		
01 22 23 00-0995	DAY	150,000 BTU/Hour Space Heater	68.00	
		For Half Day Usage, Deduct	*-21.25*	
01 22 23 00-0996	WK	150,000 BTU/Hour Space Heater	195.50	
01 22 23 00-0997	MO	150,000 BTU/Hour Space Heater	552.50	
		For >6 Months (>26 Weeks), Deduct	*-22.10*	
01 22 23 00-0998	DAY	500,000 BTU/Hour Space Heater	144.50	
		For Half Day Usage, Deduct	*-45.16*	
01 22 23 00-0999	WK	500,000 BTU/Hour Space Heater	357.00	
01 22 23 00-1000	MO	500,000 BTU/Hour Space Heater	902.70	
		For >6 Months (>26 Weeks), Deduct	*-36.11*	
01 22 23 00-1001		**Mowers** *(01 22 23 00-0921)*		
		Note: Includes delivery to job site and pick-up when complete. Excludes operator.		
01 22 23 00-1002	DAY	21" Walk Behind Lawn Mower	99.20	
		For Half Day Usage, Deduct	*-31.00*	
01 22 23 00-1003	WK	21" Walk Behind Lawn Mower	285.19	
01 22 23 00-1004	MO	21" Walk Behind Lawn Mower	582.78	
		For >6 Months (>26 Weeks), Deduct	*-23.31*	
01 22 23 00-1005	DAY	32" Walk Behind Lawn Mower	124.00	
		For Half Day Usage, Deduct	*-38.75*	
01 22 23 00-1006	WK	32" Walk Behind Lawn Mower	297.59	
01 22 23 00-1007	MO	32" Walk Behind Lawn Mower	619.98	
		For >6 Months (>26 Weeks), Deduct	*-24.80*	
01 22 23 00-1008	DAY	36" To 48" Walk Behind Deck Mower	223.19	
		For Half Day Usage, Deduct	*-69.75*	
01 22 23 00-1009	WK	36" To 48" Walk Behind Deck Mower	619.98	
01 22 23 00-1010	MO	36" To 48" Walk Behind Deck Mower	1,797.93	
		For >6 Months (>26 Weeks), Deduct	*-71.92*	
01 22 23 00-1011	DAY	61" To 72" Walk Behind Deck Mower	223.19	
		For Half Day Usage, Deduct	*-69.75*	
01 22 23 00-1012	WK	61" To 72" Walk Behind Deck Mower	619.98	
01 22 23 00-1013	MO	61" To 72" Walk Behind Deck Mower	1,797.93	
		For >6 Months (>26 Weeks), Deduct	*-71.92*	
01 22 23 00-1014		**Trailer Mounted Brush Chipper** *(01 22 23 00-0921)*		
		Note: Includes delivery to job site and pick-up when complete.		
01 22 23 00-1015	DAY	4" Capacity, Trailer Mounted Brush Chipper For Emergency Cleanup	192.25	
		For Half Day Usage, Deduct	*-60.08*	
01 22 23 00-1016	WK	4" Capacity, Trailer Mounted Brush Chipper For Emergency Cleanup	459.72	
01 22 23 00-1017	MO	4" Capacity, Trailer Mounted Brush Chipper For Emergency Cleanup	1,412.59	
		For >6 Months (>26 Weeks), Deduct	*-56.50*	
01 22 23 00-1018	DAY	6" Capacity, Trailer Mounted Brush Chipper For Emergency Cleanup	250.76	
		For Half Day Usage, Deduct	*-78.36*	
01 22 23 00-1019	WK	6" Capacity, Trailer Mounted Brush Chipper For Emergency Cleanup	565.03	
01 22 23 00-1020	MO	6" Capacity, Trailer Mounted Brush Chipper For Emergency Cleanup	1,504.53	
		For >6 Months (>26 Weeks), Deduct	*-60.18*	
01 22 23 00-1021	DAY	9" Capacity, Trailer Mounted Brush Chipper For Emergency Cleanup	468.08	
		For Half Day Usage, Deduct	*-146.28*	
01 22 23 00-1022	WK	9" Capacity, Trailer Mounted Brush Chipper For Emergency Cleanup	1,053.17	
01 22 23 00-1023	MO	9" Capacity, Trailer Mounted Brush Chipper For Emergency Cleanup	2,808.46	
		For >6 Months (>26 Weeks), Deduct	*-112.34*	
01 22 23 00-1024	DAY	12" Capacity, Trailer Mounted Brush Chipper For Emergency Cleanup	498.35	
		For Half Day Usage, Deduct	*-155.73*	
01 22 23 00-1025	WK	12" Capacity, Trailer Mounted Brush Chipper For Emergency Cleanup	1,121.28	
01 22 23 00-1026	MO	12" Capacity, Trailer Mounted Brush Chipper For Emergency Cleanup	2,990.09	
		For >6 Months (>26 Weeks), Deduct	*-119.60*	
01 22 23 00-1027		**Marine Equipment** *(01 22 23)*		
01 22 23 00-1028		**Barge And Tug Boat Rental** *(01 22 23 00-1027)*		
01 22 23 00-1029	DAY	50' Deck Cargo Barge	1,225.45	
		For Half Day Usage, Deduct	*-382.95*	
01 22 23 00-1030	DAY	90' Deck Cargo Barge	1,739.70	
		For Half Day Usage, Deduct	*-543.66*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-1031	DAY	160' Deck Cargo Barge	2,560.31	
		For Half Day Usage, Deduct	*-800.10*	
01 22 23 00-1032	DAY	200' Deck Cargo Barge	3,884.23	
		For Half Day Usage, Deduct	*-1,213.82*	
01 22 23 00-1033	DAY	Barge Rental With Mounted Crane And Full-time Operator Note: Including barge.	2,808.19	
		For Half Day Usage, Deduct	*-1,074.24*	
01 22 23 00-1034	HR	250 HP Tug Boat With Operator	256.57	
01 22 23 00-1035	HR	400 HP Tug Boat With Operator	457.33	
01 22 23 00-1036	HR	500 To 800 HP Tug Boat With Operator	572.71	
01 22 23 00-1037	HR	16' Work Boat With Operator	136.64	
01 22 23 00-1038	HR	48' Work Boat With Operator	442.86	
01 22 23 00-1039		**Manual Powered, Deck Cargo Barges** *(01 22 23 00-1027)* Note: Excludes captain and crew.		
01 22 23 00-1040	DAY	50' Length, 35' Beam, 9' Depth, 313 Short Tons, Manual Powered, Deck Cargo Barge	1,281.54	
		For Half Day Usage, Deduct	*-400.48*	
01 22 23 00-1041	WK	50' Length, 35' Beam, 9' Depth, 313 Short Tons, Manual Powered, Deck Cargo Barge	5,104.80	
01 22 23 00-1042	MO	50' Length, 35' Beam, 9' Depth, 313 Short Tons, Manual Powered, Deck Cargo Barge	18,219.23	
		For >6 Months (>26 Weeks), Deduct	*-728.77*	
01 22 23 00-1043	HR	Operating Cost For 50' Length, 35' Beam, 9' Depth, 313 Short Tons, Manual Powered, Deck Cargo Barge	20.61	
01 22 23 00-1044	DAY	90' Length, 35' Beam, 9' Depth, 564 Short Tons, Manual Powered, Deck Cargo Barge	1,847.55	
		For Half Day Usage, Deduct	*-577.36*	
01 22 23 00-1045	WK	90' Length, 35' Beam, 9' Depth, 564 Short Tons, Manual Powered, Deck Cargo Barge	7,379.53	
01 22 23 00-1046	MO	90' Length, 35' Beam, 9' Depth, 564 Short Tons, Manual Powered, Deck Cargo Barge	26,357.01	
		For >6 Months (>26 Weeks), Deduct	*-1,054.28*	
01 22 23 00-1047	HR	Operating Cost For 90' Length, 35' Beam, 9' Depth, 564 Short Tons, Manual Powered, Deck Cargo Barge	38.55	
01 22 23 00-1048	DAY	120' Length, 45' Beam, 10' Depth, 1,074 Short Tons, Manual Powered, Deck Cargo Barge	2,264.05	
		For Half Day Usage, Deduct	*-707.52*	
01 22 23 00-1049	WK	120' Length, 45' Beam, 10' Depth, 1,074 Short Tons, Manual Powered, Deck Cargo Barge	9,056.22	
01 22 23 00-1050	MO	120' Length, 45' Beam, 10' Depth, 1,074 Short Tons, Manual Powered, Deck Cargo Barge	32,358.88	
		For >6 Months (>26 Weeks), Deduct	*-1,294.36*	
01 22 23 00-1051	HR	Operating Cost For 120' Length, 45' Beam, 10' Depth, 1,074 Short Tons, Manual Powered, Deck Cargo Barge	46.88	
01 22 23 00-1052	DAY	140' Length, 45' Beam, 10' Depth, 1,253 Short Tons, Manual Powered, Deck Cargo Barge	2,434.93	
		For Half Day Usage, Deduct	*-760.92*	
01 22 23 00-1053	WK	140' Length, 45' Beam, 10' Depth, 1,253 Short Tons, Manual Powered, Deck Cargo Barge	9,718.34	
01 22 23 00-1054	MO	140' Length, 45' Beam, 10' Depth, 1,253 Short Tons, Manual Powered, Deck Cargo Barge	34,708.38	
		For >6 Months (>26 Weeks), Deduct	*-1,388.34*	
01 22 23 00-1055	HR	Operating Cost For 140' Length, 45' Beam, 10' Depth, 1,253 Short Tons, Manual Powered, Deck Cargo Barge	52.12	
01 22 23 00-1056	DAY	160' Length, 45' Beam, 11' Depth, 1,575 Short Tons, Manual Powered, Deck Cargo Barge	2,723.27	
		For Half Day Usage, Deduct	*-851.02*	
01 22 23 00-1057	WK	160' Length, 45' Beam, 11' Depth, 1,575 Short Tons, Manual Powered, Deck Cargo Barge	10,893.09	
01 22 23 00-1058	MO	160' Length, 45' Beam, 11' Depth, 1,575 Short Tons, Manual Powered, Deck Cargo Barge	38,916.10	
		For >6 Months (>26 Weeks), Deduct	*-1,556.64*	
01 22 23 00-1059	HR	Operating Cost For 160' Length, 45' Beam, 11' Depth, 1,575 Short Tons, Manual Powered, Deck Cargo Barge	61.51	
01 22 23 00-1060	DAY	170' Length, 45' Beam, 11' Depth, 1,673 Short Tons, Manual Powered, Deck Cargo Barge	2,819.39	
		For Half Day Usage, Deduct	*-881.06*	
01 22 23 00-1061	WK	170' Length, 45' Beam, 11' Depth, 1,673 Short Tons, Manual Powered, Deck Cargo Barge	11,256.19	
01 22 23 00-1062	MO	170' Length, 45' Beam, 11' Depth, 1,673 Short Tons, Manual Powered, Deck Cargo Barge	40,197.64	
		For >6 Months (>26 Weeks), Deduct	*-1,607.91*	
01 22 23 00-1063	HR	Operating Cost For 170' Length, 45' Beam, 11' Depth, 1,673 Short Tons, Manual Powered, Deck Cargo Barge	64.29	
01 22 23 00-1064	DAY	200' Length, 60' Beam, 13' Depth, 3,102 Short Tons, Manual Powered, Deck Cargo Barge	4,132.97	
		For Half Day Usage, Deduct	*-1,291.55*	
01 22 23 00-1065	WK	200' Length, 60' Beam, 13' Depth, 3,102 Short Tons, Manual Powered, Deck Cargo Barge	16,510.51	
01 22 23 00-1066	MO	200' Length, 60' Beam, 13' Depth, 3,102 Short Tons, Manual Powered, Deck Cargo Barge	58,982.88	
		For >6 Months (>26 Weeks), Deduct	*-2,359.32*	
01 22 23 00-1067	HR	Operating Cost For 200' Length, 60' Beam, 13' Depth, 3,102 Short Tons, Manual Powered, Deck Cargo Barge	106.05	
01 22 23 00-1068	DAY	240' Length, 60' Beam, 17' Depth, 4,867 Short Tons, Manual Powered, Deck Cargo Barge	5,745.57	
		For Half Day Usage, Deduct	*-1,795.49*	
01 22 23 00-1069	WK	240' Length, 60' Beam, 17' Depth, 4,867 Short Tons, Manual Powered, Deck Cargo Barge	22,992.96	
01 22 23 00-1070	MO	240' Length, 60' Beam, 17' Depth, 4,867 Short Tons, Manual Powered, Deck Cargo Barge	82,125.36	
		For >6 Months (>26 Weeks), Deduct	*-3,285.01*	
01 22 23 00-1071	HR	Operating Cost For 240' Length, 60' Beam, 17' Depth, 4,867 Short Tons, Manual Powered, Deck Cargo Barge	157.52	
01 22 23 00-1072	DAY	280' Length, 75' Beam, 18' Depth, 7,516 Short Tons, Manual Powered, Deck Cargo Barge	8,191.18	
		For Half Day Usage, Deduct	*-2,559.74*	
01 22 23 00-1073	WK	280' Length, 75' Beam, 18' Depth, 7,516 Short Tons, Manual Powered, Deck Cargo Barge	32,743.35	
01 22 23 00-1074	MO	280' Length, 75' Beam, 18' Depth, 7,516 Short Tons, Manual Powered, Deck Cargo Barge	116,929.85	
		For >6 Months (>26 Weeks), Deduct	*-4,677.19*	
01 22 23 00-1075	HR	Operating Cost For 280' Length, 75' Beam, 18' Depth, 7,516 Short Tons, Manual Powered, Deck Cargo Barge	234.84	
01 22 23 00-1076	DAY	300' Length, 75' Beam, 25' Depth, 11,184 Short Tons, Manual Powered, Deck Cargo Barge	11,555.22	
		For Half Day Usage, Deduct	*-3,611.01*	
01 22 23 00-1077	WK	300' Length, 75' Beam, 25' Depth, 11,184 Short Tons, Manual Powered, Deck Cargo Barge	46,220.88	
01 22 23 00-1078	MO	300' Length, 75' Beam, 25' Depth, 11,184 Short Tons, Manual Powered, Deck Cargo Barge	165,073.03	
		For >6 Months (>26 Weeks), Deduct	*-6,602.92*	
01 22 23 00-1079	HR	Operating Cost For 300' Length, 75' Beam, 25' Depth, 11,184 Short Tons, Manual Powered, Deck Cargo Barge	341.85	
01 22 23 00-1080		**Inland Tug Boats** *(01 22 23 00-1027)* Note: Excludes captain and crew.		
01 22 23 00-1081	DAY	16' Length, 100 HP, Shallow Draft, Inland Tug Boat	363.10	
		For Half Day Usage, Deduct	*-113.47*	
01 22 23 00-1082	WK	16' Length, 100 HP, Shallow Draft, Inland Tug Boat	1,463.09	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-1083	MO	16' Length, 100 HP, Shallow Draft, Inland Tug Boat	5,222.28	
		For >6 Months (>26 Weeks), Deduct	*-208.89*	
01 22 23 00-1084	HR	Operating Cost For 16' Length, 100 HP, Shallow Draft, Inland Tug Boat	61.51	
01 22 23 00-1085	DAY	22' Length, 115 HP, Shallow Draft, Inland Tug Boat	437.86	
		For Half Day Usage, Deduct	*-136.83*	
01 22 23 00-1086	WK	22' Length, 115 HP, Shallow Draft, Inland Tug Boat	1,740.76	
01 22 23 00-1087	MO	22' Length, 115 HP, Shallow Draft, Inland Tug Boat	6,215.47	
		For >6 Months (>26 Weeks), Deduct	*-248.62*	
01 22 23 00-1088	HR	Operating Cost For 22' Length, 115 HP, Shallow Draft, Inland Tug Boat	67.92	
01 22 23 00-1089	DAY	18' Length, 175 HP, With Steering Nozzle, Inland Tug Boat	544.65	
		For Half Day Usage, Deduct	*-170.20*	
01 22 23 00-1090	WK	18' Length, 175 HP, With Steering Nozzle, Inland Tug Boat	2,189.30	
01 22 23 00-1091	MO	18' Length, 175 HP, With Steering Nozzle, Inland Tug Boat	7,817.39	
		For >6 Months (>26 Weeks), Deduct	*-312.70*	
01 22 23 00-1092	HR	Operating Cost For 18' Length, 175 HP, With Steering Nozzle, Inland Tug Boat	89.71	
01 22 23 00-1093	DAY	26' Length, 250 HP, With Steering Nozzle, Inland Tug Boat	651.45	
		For Half Day Usage, Deduct	*-203.58*	
01 22 23 00-1094	WK	26' Length, 250 HP, With Steering Nozzle, Inland Tug Boat	2,616.48	
01 22 23 00-1095	MO	26' Length, 250 HP, With Steering Nozzle, Inland Tug Boat	9,333.88	
		For >6 Months (>26 Weeks), Deduct	*-373.36*	
01 22 23 00-1096	HR	Operating Cost For 26' Length, 250 HP, With Steering Nozzle, Inland Tug Boat	116.19	
01 22 23 00-1097	DAY	40' Length, 380 HP, Standard Ruder, Inland Tug Boat	1,965.03	
		For Half Day Usage, Deduct	*-614.07*	
01 22 23 00-1098	WK	40' Length, 380 HP, Standard Ruder, Inland Tug Boat	7,870.79	
01 22 23 00-1099	MO	40' Length, 380 HP, Standard Ruder, Inland Tug Boat	28,097.76	
		For >6 Months (>26 Weeks), Deduct	*-1,123.91*	
01 22 23 00-1100	HR	Operating Cost For 40' Length, 380 HP, Standard Ruder, Inland Tug Boat	261.54	
01 22 23 00-1101	DAY	51' Length, 700 HP, Twin Screw, Inland Tug Boat	2,541.72	
		For Half Day Usage, Deduct	*-794.29*	
01 22 23 00-1102	WK	51' Length, 700 HP, Twin Screw, Inland Tug Boat	10,177.56	
01 22 23 00-1103	MO	51' Length, 700 HP, Twin Screw, Inland Tug Boat	36,331.66	
		For >6 Months (>26 Weeks), Deduct	*-1,453.27*	
01 22 23 00-1104	HR	Operating Cost For 51' Length, 700 HP, Twin Screw, Inland Tug Boat	376.35	

01 22 23 00-1105 Flat Hull, Push Boats *(01 22 23 00-1027)*

Note: Excludes captain and crew.

01 22 23 00-1106	DAY	48' Length, 20' Beam, 6'-6" Draft, 400 HP, Flat Hull, Push Boat	2,114.54	
		For Half Day Usage, Deduct	*-660.79*	
01 22 23 00-1107	WK	48' Length, 20' Beam, 6'-6" Draft, 400 HP, Flat Hull, Push Boat	8,447.48	
01 22 23 00-1108	MO	48' Length, 20' Beam, 6'-6" Draft, 400 HP, Flat Hull, Push Boat	30,180.27	
		For >6 Months (>26 Weeks), Deduct	*-1,207.21*	
01 22 23 00-1109	HR	Operating Cost For 48' Length, 20' Beam, 6'-6" Draft, 400 HP, Flat Hull, Push Boat	293.79	
01 22 23 00-1110	DAY	45' Length, 16' Beam, 5'-0" Draft, 435 HP, Flat Hull, Push Boat	1,698.04	
		For Half Day Usage, Deduct	*-530.64*	
01 22 23 00-1111	WK	45' Length, 16' Beam, 5'-0" Draft, 435 HP, Flat Hull, Push Boat	6,802.84	
01 22 23 00-1112	MO	45' Length, 16' Beam, 5'-0" Draft, 435 HP, Flat Hull, Push Boat	24,285.18	
		For >6 Months (>26 Weeks), Deduct	*-971.41*	
01 22 23 00-1113	HR	Operating Cost For 45' Length, 16' Beam, 5'-0" Draft, 435 HP, Flat Hull, Push Boat	290.59	
01 22 23 00-1114	DAY	58' Length, 21' Beam, 6'-0" Draft, 435 HP, Flat Hull, Push Boat	2,990.26	
		For Half Day Usage, Deduct	*-934.46*	
01 22 23 00-1115	WK	58' Length, 21' Beam, 6'-0" Draft, 435 HP, Flat Hull, Push Boat	11,939.68	
01 22 23 00-1116	MO	58' Length, 21' Beam, 6'-0" Draft, 435 HP, Flat Hull, Push Boat	42,643.24	
		For >6 Months (>26 Weeks), Deduct	*-1,705.73*	
01 22 23 00-1117	HR	Operating Cost For 58' Length, 21' Beam, 6'-0" Draft, 435 HP, Flat Hull, Push Boat	372.61	
01 22 23 00-1118	DAY	54' Length, 21' Beam, 6'-0" Draft, 525 HP, Flat Hull, Push Boat	2,381.53	
		For Half Day Usage, Deduct	*-744.23*	
01 22 23 00-1119	WK	54' Length, 21' Beam, 6'-0" Draft, 525 HP, Flat Hull, Push Boat	9,526.11	
01 22 23 00-1120	MO	54' Length, 21' Beam, 6'-0" Draft, 525 HP, Flat Hull, Push Boat	34,035.57	
		For >6 Months (>26 Weeks), Deduct	*-1,361.42*	
01 22 23 00-1121	HR	Operating Cost For 54' Length, 21' Beam, 6'-0" Draft, 525 HP, Flat Hull, Push Boat	379.12	
01 22 23 00-1122	DAY	58' Length, 24' Beam, 7'-6" Draft, 705 HP, Flat Hull, Push Boat	3,032.98	
		For Half Day Usage, Deduct	*-947.81*	
01 22 23 00-1123	WK	58' Length, 24' Beam, 7'-6" Draft, 705 HP, Flat Hull, Push Boat	12,110.55	
01 22 23 00-1124	MO	58' Length, 24' Beam, 7'-6" Draft, 705 HP, Flat Hull, Push Boat	43,251.98	
		For >6 Months (>26 Weeks), Deduct	*-1,730.08*	
01 22 23 00-1125	HR	Operating Cost For 58' Length, 24' Beam, 7'-6" Draft, 705 HP, Flat Hull, Push Boat	451.21	
01 22 23 00-1126	DAY	64' Length, 25' Beam, 8'-0" Draft, 870 HP, Flat Hull, Push Boat	3,235.89	
		For Half Day Usage, Deduct	*-1,011.22*	
01 22 23 00-1127	WK	64' Length, 25' Beam, 8'-0" Draft, 870 HP, Flat Hull, Push Boat	12,954.23	
01 22 23 00-1128	MO	64' Length, 25' Beam, 8'-0" Draft, 870 HP, Flat Hull, Push Boat	46,252.91	
		For >6 Months (>26 Weeks), Deduct	*-1,850.12*	
01 22 23 00-1129	HR	Operating Cost For 64' Length, 25' Beam, 8'-0" Draft, 870 HP, Flat Hull, Push Boat	505.25	
01 22 23 00-1130	DAY	100' Length, 35' Beam, 8'-0" Draft, 1,950 HP, Flat Hull, Push Boat	5,863.05	
		For Half Day Usage, Deduct	*-1,832.20*	
01 22 23 00-1131	WK	100' Length, 35' Beam, 8'-0" Draft, 1,950 HP, Flat Hull, Push Boat	23,462.86	
01 22 23 00-1132	MO	100' Length, 35' Beam, 8'-0" Draft, 1,950 HP, Flat Hull, Push Boat	83,791.36	
		For >6 Months (>26 Weeks), Deduct	*-3,351.65*	
01 22 23 00-1133	HR	Operating Cost For 100' Length, 35' Beam, 8'-0" Draft, 1,950 HP, Flat Hull, Push Boat	1,099.24	
01 22 23 00-1134	DAY	138' Length, 35' Beam, 8'-6" Draft, 3,900 HP, Flat Hull, Push Boat	7,625.16	
		For Half Day Usage, Deduct	*-2,382.86*	
01 22 23 00-1135	WK	138' Length, 35' Beam, 8'-6" Draft, 3,900 HP, Flat Hull, Push Boat	30,479.29	

copyright 2026 The Gordian Group, Inc.

	MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-1136		MO	138' Length, 35' Beam, 8'-6" Draft, 3,900 HP, Flat Hull, Push Boat	108,866.82	
			For >6 Months (>26 Weeks), Deduct	*-4,354.67*	
01 22 23 00-1137		HR	Operating Cost For 138' Length, 35' Beam, 8'-6" Draft, 3,900 HP, Flat Hull, Push Boat	1,786.25	
01 22 23 00-1138		DAY	140' Length, 42' Beam, 8'-6" Draft, 3,900 HP, Flat Hull, Push Boat	15,164.89	
			For Half Day Usage, Deduct	*-4,739.03*	
01 22 23 00-1139		WK	140' Length, 42' Beam, 8'-6" Draft, 3,900 HP, Flat Hull, Push Boat	60,670.24	
01 22 23 00-1140		MO	140' Length, 42' Beam, 8'-6" Draft, 3,900 HP, Flat Hull, Push Boat	216,697.73	
			For >6 Months (>26 Weeks), Deduct	*-8,667.91*	
01 22 23 00-1141		HR	Operating Cost For 140' Length, 42' Beam, 8'-6" Draft, 3,900 HP, Flat Hull, Push Boat	2,067.55	
01 22 23 00-1142		DAY	140' Length, 54' Beam, 8'-9" Draft, 5,200 HP, Flat Hull, Push Boat	16,072.65	
			For Half Day Usage, Deduct	*-5,022.70*	
01 22 23 00-1143		WK	140' Length, 54' Beam, 8'-9" Draft, 5,200 HP, Flat Hull, Push Boat	64,301.27	
01 22 23 00-1144		MO	140' Length, 54' Beam, 8'-9" Draft, 5,200 HP, Flat Hull, Push Boat	229,651.97	
			For >6 Months (>26 Weeks), Deduct	*-9,186.08*	
01 22 23 00-1145		HR	Operating Cost For 140' Length, 54' Beam, 8'-9" Draft, 5,200 HP, Flat Hull, Push Boat	2,472.30	

01 22 23 00-1146 Steel Tow Boats *(01 22 23 00-1027)*

Note: Excludes captain and crew.

01 22 23 00-1147		DAY	55' Length, 20' Beam, 5'-0" Draft, 870 HP, Steel Tow Boat	2,573.76	
			For Half Day Usage, Deduct	*-804.30*	
01 22 23 00-1148		WK	55' Length, 20' Beam, 5'-0" Draft, 870 HP, Steel Tow Boat	10,273.68	
01 22 23 00-1149		MO	55' Length, 20' Beam, 5'-0" Draft, 870 HP, Steel Tow Boat	36,705.44	
			For >6 Months (>26 Weeks), Deduct	*-1,468.22*	
01 22 23 00-1150		HR	Operating Cost For 55' Length, 20' Beam, 5'-0" Draft, 870 HP, Steel Tow Boat	471.29	
01 22 23 00-1151		DAY	60' Length, 18' Beam, 5'-0" Draft, 1,050 HP, Steel Tow Boat	2,669.88	
			For Half Day Usage, Deduct	*-834.34*	
01 22 23 00-1152		WK	60' Length, 18' Beam, 5'-0" Draft, 1,050 HP, Steel Tow Boat	10,690.18	
01 22 23 00-1153		MO	60' Length, 18' Beam, 5'-0" Draft, 1,050 HP, Steel Tow Boat	38,189.89	
			For >6 Months (>26 Weeks), Deduct	*-1,527.60*	
01 22 23 00-1154		HR	Operating Cost For 60' Length, 18' Beam, 5'-0" Draft, 1,050 HP, Steel Tow Boat	524.26	
01 22 23 00-1155		DAY	60' Length, 21' Beam, 5'-0" Draft, 1,050 HP, Steel Tow Boat	2,915.50	
			For Half Day Usage, Deduct	*-911.09*	
01 22 23 00-1156		WK	60' Length, 21' Beam, 5'-0" Draft, 1,050 HP, Steel Tow Boat	11,651.33	
01 22 23 00-1157		MO	60' Length, 21' Beam, 5'-0" Draft, 1,050 HP, Steel Tow Boat	41,596.65	
			For >6 Months (>26 Weeks), Deduct	*-1,663.87*	
01 22 23 00-1158		HR	Operating Cost For 60' Length, 21' Beam, 5'-0" Draft, 1,050 HP, Steel Tow Boat	531.41	
01 22 23 00-1159		DAY	62' Length, 22' Beam, 5'-0" Draft, 870 HP, Steel Tow Boat	3,289.29	
			For Half Day Usage, Deduct	*-1,027.90*	
01 22 23 00-1160		WK	62' Length, 22' Beam, 5'-0" Draft, 870 HP, Steel Tow Boat	13,146.46	
01 22 23 00-1161		MO	62' Length, 22' Beam, 5'-0" Draft, 870 HP, Steel Tow Boat	46,936.40	
			For >6 Months (>26 Weeks), Deduct	*-1,877.46*	
01 22 23 00-1162		HR	Operating Cost For 62' Length, 22' Beam, 5'-0" Draft, 870 HP, Steel Tow Boat	492.75	
01 22 23 00-1163		DAY	65' Length, 22' Beam, 7'-6" Draft, 870 HP, Steel Tow Boat	4,570.83	
			For Half Day Usage, Deduct	*-1,428.38*	
01 22 23 00-1164		WK	65' Length, 22' Beam, 7'-6" Draft, 870 HP, Steel Tow Boat	18,283.30	
01 22 23 00-1165		MO	65' Length, 22' Beam, 7'-6" Draft, 870 HP, Steel Tow Boat	65,283.78	
			For >6 Months (>26 Weeks), Deduct	*-2,611.35*	
01 22 23 00-1166		HR	Operating Cost For 65' Length, 22' Beam, 7'-6" Draft, 870 HP, Steel Tow Boat	636.93	
01 22 23 00-1167		DAY	70' Length, 24' Beam, 7'-6" Draft, 1,350 HP, Steel Tow Boat	4,923.25	
			For Half Day Usage, Deduct	*-1,538.52*	
01 22 23 00-1168		WK	70' Length, 24' Beam, 7'-6" Draft, 1,350 HP, Steel Tow Boat	19,703.68	
01 22 23 00-1169		MO	70' Length, 24' Beam, 7'-6" Draft, 1,350 HP, Steel Tow Boat	70,377.90	
			For >6 Months (>26 Weeks), Deduct	*-2,815.12*	
01 22 23 00-1170		HR	Operating Cost For 70' Length, 24' Beam, 7'-6" Draft, 1,350 HP, Steel Tow Boat	780.67	
01 22 23 00-1171		DAY	70' Length, 30' Beam, 7'-6" Draft, 1,350 HP, Steel Tow Boat	5,275.67	
			For Half Day Usage, Deduct	*-1,648.65*	
01 22 23 00-1172		WK	70' Length, 30' Beam, 7'-6" Draft, 1,350 HP, Steel Tow Boat	21,081.33	
01 22 23 00-1173		MO	70' Length, 30' Beam, 7'-6" Draft, 1,350 HP, Steel Tow Boat	75,290.48	
			For >6 Months (>26 Weeks), Deduct	*-3,011.62*	
01 22 23 00-1174		HR	Operating Cost For 70' Length, 30' Beam, 7'-6" Draft, 1,350 HP, Steel Tow Boat	791.03	
01 22 23 00-1175		DAY	115' Length, 28' Beam, 8'-0" Draft, 1,950 HP, Steel Tow Boat	10,754.26	
			For Half Day Usage, Deduct	*-3,360.71*	
01 22 23 00-1176		WK	115' Length, 28' Beam, 8'-0" Draft, 1,950 HP, Steel Tow Boat	43,027.71	
01 22 23 00-1177		MO	115' Length, 28' Beam, 8'-0" Draft, 1,950 HP, Steel Tow Boat	153,688.68	
			For >6 Months (>26 Weeks), Deduct	*-6,147.55*	
01 22 23 00-1178		HR	Operating Cost For 115' Length, 28' Beam, 8'-0" Draft, 1,950 HP, Steel Tow Boat	1,261.25	
01 22 23 00-1179		DAY	120' Length, 34' Beam, 8'-0" Draft, 2,000 HP, Steel Tow Boat	12,505.69	
			For Half Day Usage, Deduct	*-3,908.03*	
01 22 23 00-1180		WK	120' Length, 34' Beam, 8'-0" Draft, 2,000 HP, Steel Tow Boat	50,022.78	
01 22 23 00-1181		MO	120' Length, 34' Beam, 8'-0" Draft, 2,000 HP, Steel Tow Boat	178,657.36	
			For >6 Months (>26 Weeks), Deduct	*-7,146.29*	
01 22 23 00-1182		HR	Operating Cost For 120' Length, 34' Beam, 8'-0" Draft, 2,000 HP, Steel Tow Boat	1,331.41	
01 22 23 00-1183		DAY	140' Length, 45' Beam, 8'-0" Draft, 5,250 HP, Steel Tow Boat	15,859.06	
			For Half Day Usage, Deduct	*-4,955.96*	
01 22 23 00-1184		WK	140' Length, 45' Beam, 8'-0" Draft, 5,250 HP, Steel Tow Boat	63,425.55	
01 22 23 00-1185		MO	140' Length, 45' Beam, 8'-0" Draft, 5,250 HP, Steel Tow Boat	226,533.55	
			For >6 Months (>26 Weeks), Deduct	*-9,061.34*	
01 22 23 00-1186		HR	Operating Cost For 140' Length, 45' Beam, 8'-0" Draft, 5,250 HP, Steel Tow Boat	2,722.10	

01 22 23 00-1187 Material Handling Equipment *(01 22 23)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-1188		**Truck Mounted Hydraulic Cranes** *(01 22 23 00-1187)* Note: Includes full-time operator, delivery, set-up, rigging, all necessary counter weights and removal time in rental period. Excludes lattice boom extension.		
01 22 23 00-1189	DAY	6 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	1,560.69	
		For Equipment Without Operator, Deduct	*-1,072.42*	
		For Half Day Usage, Deduct	*-688.79*	
01 22 23 00-1190	WK	6 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	6,841.26	
		For Equipment Without Operator, Deduct	*-5,362.08*	
01 22 23 00-1191	MO	6 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	27,687.59	
		For Equipment Without Operator, Deduct	*-23,235.68*	
		For >6 Months (>26 Weeks), Deduct	*-178.08*	
01 22 23 00-1192	DAY	8 To 9 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	1,689.94	
		For Equipment Without Operator, Deduct	*-1,072.42*	
		For Half Day Usage, Deduct	*-729.19*	
01 22 23 00-1193	WK	8 To 9 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	7,225.42	
		For Equipment Without Operator, Deduct	*-5,362.08*	
01 22 23 00-1194	MO	8 To 9 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	28,836.47	
		For Equipment Without Operator, Deduct	*-23,235.68*	
		For >6 Months (>26 Weeks), Deduct	*-224.03*	
01 22 23 00-1195	DAY	14 To 15 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	1,819.19	
		For Equipment Without Operator, Deduct	*-1,072.42*	
		For Half Day Usage, Deduct	*-769.58*	
01 22 23 00-1196	WK	14 To 15 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	7,609.58	
		For Equipment Without Operator, Deduct	*-5,362.08*	
01 22 23 00-1197	MO	14 To 15 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	29,985.35	
		For Equipment Without Operator, Deduct	*-23,235.68*	
		For >6 Months (>26 Weeks), Deduct	*-269.99*	
01 22 23 00-1198	DAY	20 To 25 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	1,991.52	
		For Equipment Without Operator, Deduct	*-1,072.42*	
		For Half Day Usage, Deduct	*-823.43*	
01 22 23 00-1199	WK	20 To 25 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	8,126.57	
		For Equipment Without Operator, Deduct	*-5,362.08*	
01 22 23 00-1200	MO	20 To 25 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	31,529.16	
		For Equipment Without Operator, Deduct	*-23,235.68*	
		For >6 Months (>26 Weeks), Deduct	*-331.74*	
01 22 23 00-1201	DAY	30 To 35 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	2,149.50	
		For Equipment Without Operator, Deduct	*-1,072.42*	
		For Half Day Usage, Deduct	*-872.80*	
01 22 23 00-1202	WK	30 To 35 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	9,196.47	
		For Equipment Without Operator, Deduct	*-5,362.08*	
01 22 23 00-1203	MO	30 To 35 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	34,735.97	
		For Equipment Without Operator, Deduct	*-23,235.68*	
		For >6 Months (>26 Weeks), Deduct	*-460.01*	
01 22 23 00-1204	DAY	40 To 45 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	2,522.88	
		For Equipment Without Operator, Deduct	*-1,072.42*	
		For Half Day Usage, Deduct	*-989.48*	
01 22 23 00-1205	WK	40 To 45 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	10,532.04	
		For Equipment Without Operator, Deduct	*-5,362.08*	
01 22 23 00-1206	MO	40 To 45 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	38,745.56	
		For Equipment Without Operator, Deduct	*-23,235.68*	
		For >6 Months (>26 Weeks), Deduct	*-620.40*	
01 22 23 00-1207	DAY	50 To 55 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	2,759.84	
		For Equipment Without Operator, Deduct	*-1,072.42*	
		For Half Day Usage, Deduct	*-1,063.53*	
01 22 23 00-1208	WK	50 To 55 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	11,364.98	
		For Equipment Without Operator, Deduct	*-5,362.08*	
01 22 23 00-1209	MO	50 To 55 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	41,250.12	
		For Equipment Without Operator, Deduct	*-23,235.68*	
		For >6 Months (>26 Weeks), Deduct	*-720.58*	
01 22 23 00-1210	DAY	60 To 65 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	2,946.53	
		For Equipment Without Operator, Deduct	*-1,072.42*	
		For Half Day Usage, Deduct	*-1,121.87*	
01 22 23 00-1211	WK	60 To 65 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	12,039.94	
		For Equipment Without Operator, Deduct	*-5,362.08*	
01 22 23 00-1212	MO	60 To 65 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	43,272.15	
		For Equipment Without Operator, Deduct	*-23,235.68*	
		For >6 Months (>26 Weeks), Deduct	*-801.46*	
01 22 23 00-1213	DAY	70 To 75 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	3,133.22	
		For Equipment Without Operator, Deduct	*-1,072.42*	
		For Half Day Usage, Deduct	*-1,180.21*	
01 22 23 00-1214	WK	70 To 75 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	12,714.91	
		For Equipment Without Operator, Deduct	*-5,362.08*	
01 22 23 00-1215	MO	70 To 75 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	45,294.18	
		For Equipment Without Operator, Deduct	*-23,235.68*	
		For >6 Months (>26 Weeks), Deduct	*-882.34*	
01 22 23 00-1216	DAY	85 To 90 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	3,255.29	
		For Equipment Without Operator, Deduct	*-1,072.42*	
		For Half Day Usage, Deduct	*-1,218.36*	
01 22 23 00-1217	WK	85 To 90 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	13,131.38	
		For Equipment Without Operator, Deduct	*-5,362.08*	
01 22 23 00-1218	MO	85 To 90 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	46,557.94	
		For Equipment Without Operator, Deduct	*-23,235.68*	
		For >6 Months (>26 Weeks), Deduct	*-932.89*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-1219	DAY	100 To 110 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	3,420.44	
		For Equipment Without Operator, Deduct	*-1,072.42*	
		For Half Day Usage, Deduct	*-1,269.97*	
01 22 23 00-1220	WK	100 To 110 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	13,748.90	
		For Equipment Without Operator, Deduct	*-5,362.08*	
01 22 23 00-1221	MO	100 To 110 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	48,396.15	
		For Equipment Without Operator, Deduct	*-23,235.68*	
		For >6 Months (>26 Weeks), Deduct	*-1,006.42*	
01 22 23 00-1222	DAY	120 To 125 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	3,951.80	
		For Equipment Without Operator, Deduct	*-1,072.42*	
		For Half Day Usage, Deduct	*-1,436.02*	
01 22 23 00-1223	WK	120 To 125 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	15,439.91	
		For Equipment Without Operator, Deduct	*-5,362.08*	
01 22 23 00-1224	MO	120 To 125 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	53,469.18	
		For Equipment Without Operator, Deduct	*-23,235.68*	
		For >6 Months (>26 Weeks), Deduct	*-1,209.34*	
01 22 23 00-1225	DAY	140 To 150 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	4,318.01	
		For Equipment Without Operator, Deduct	*-1,072.42*	
		For Half Day Usage, Deduct	*-1,550.46*	
01 22 23 00-1226	WK	140 To 150 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	16,721.63	
		For Equipment Without Operator, Deduct	*-5,362.08*	
01 22 23 00-1227	MO	140 To 150 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	57,314.33	
		For Equipment Without Operator, Deduct	*-23,235.68*	
		For >6 Months (>26 Weeks), Deduct	*-1,363.15*	
01 22 23 00-1228	DAY	175 To 185 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	4,978.61	
		For Equipment Without Operator, Deduct	*-1,072.42*	
		For Half Day Usage, Deduct	*-1,756.89*	
01 22 23 00-1229	WK	175 To 185 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	19,033.75	
		For Equipment Without Operator, Deduct	*-5,362.08*	
01 22 23 00-1230	MO	175 To 185 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	64,250.70	
		For Equipment Without Operator, Deduct	*-23,235.68*	
		For >6 Months (>26 Weeks), Deduct	*-1,640.60*	
01 22 23 00-1231	DAY	200 To 210 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	5,438.16	
		For Equipment Without Operator, Deduct	*-1,072.42*	
		For Half Day Usage, Deduct	*-1,900.50*	
01 22 23 00-1232	WK	200 To 210 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	20,642.18	
		For Equipment Without Operator, Deduct	*-5,362.08*	
01 22 23 00-1233	MO	200 To 210 Ton Lift, Truck Mounted Hydraulic Crane With Full-Time Operator	69,075.99	
		For Equipment Without Operator, Deduct	*-23,235.68*	
		For >6 Months (>26 Weeks), Deduct	*-1,833.61*	

01 22 23 00-1234 Cable Controlled Lattice Boom, Mechanical Cranes *(01 22 23 00-1187)*

Note: Includes full-time operator and counterweights. Excludes delivery, set-up, and removal. See CSI section 01 71 13 00-0006 for lattice crane delivery.

01 22 23 00-1235	DAY	75 To 80 Ton Lift, Cable Controlled Lattice Boom, Truck Mounted Mechanical Crane With Full-Time Operator	2,795.74	
		For Equipment Without Operator, Deduct	*-1,072.42*	
01 22 23 00-1236	WK	75 To 80 Ton Lift, Cable Controlled Lattice Boom, Truck Mounted Mechanical Crane With Full-Time Operator	11,508.59	
		For Equipment Without Operator, Deduct	*-5,362.08*	
01 22 23 00-1237	MO	75 To 80 Ton Lift, Cable Controlled Lattice Boom, Truck Mounted Mechanical Crane With Full-Time Operator	41,675.20	
		For Equipment Without Operator, Deduct	*-23,235.68*	
		For >6 Months (>26 Weeks), Deduct	*-737.58*	
01 22 23 00-1238	DAY	100 To 110 Ton Lift, Cable Controlled Lattice Boom, Truck Mounted Mechanical Crane With Full-Time Operator	4,124.13	
		For Equipment Without Operator, Deduct	*-1,072.42*	
01 22 23 00-1239	WK	100 To 110 Ton Lift, Cable Controlled Lattice Boom, Truck Mounted Mechanical Crane With Full-Time Operator	13,720.18	
		For Equipment Without Operator, Deduct	*-5,362.08*	
01 22 23 00-1240	MO	100 To 110 Ton Lift, Cable Controlled Lattice Boom, Truck Mounted Mechanical Crane With Full-Time Operator	48,309.99	
		For Equipment Without Operator, Deduct	*-23,235.68*	
		For >6 Months (>26 Weeks), Deduct	*-1,002.97*	
01 22 23 00-1241	DAY	125 Ton Lift, Cable Controlled Lattice Boom, Truck Mounted Or Crawler Mechanical Crane With Full-Time Operator	4,339.55	
		For Equipment Without Operator, Deduct	*-1,072.42*	
01 22 23 00-1242	WK	125 Ton Lift, Cable Controlled Lattice Boom, Truck Mounted Or Crawler Mechanical Crane With Full-Time Operator	15,292.71	
		For Equipment Without Operator, Deduct	*-5,362.08*	
01 22 23 00-1243	MO	125 Ton Lift, Cable Controlled Lattice Boom, Truck Mounted Or Crawler Mechanical Crane With Full-Time Operator	53,026.14	
		For Equipment Without Operator, Deduct	*-23,235.68*	
		For >6 Months (>26 Weeks), Deduct	*-1,191.62*	
01 22 23 00-1244	DAY	150 Ton Lift, Cable Controlled Lattice Boom, Truck Mounted Or Crawler Mechanical Crane With Full-Time Operator	4,770.38	
		For Equipment Without Operator, Deduct	*-1,072.42*	
01 22 23 00-1245	WK	150 Ton Lift, Cable Controlled Lattice Boom, Truck Mounted Or Crawler Mechanical Crane With Full-Time Operator	16,865.24	
		For Equipment Without Operator, Deduct	*-5,362.08*	
01 22 23 00-1246	MO	150 Ton Lift, Cable Controlled Lattice Boom, Truck Mounted Or Crawler Mechanical Crane With Full-Time Operator	57,736.55	
		For Equipment Without Operator, Deduct	*-23,235.68*	
		For >6 Months (>26 Weeks), Deduct	*-1,380.03*	
01 22 23 00-1247	DAY	200 Ton Lift, Cable Controlled Lattice Boom, Crawler Mechanical Crane With Full-Time Operator	4,975.02	
		For Equipment Without Operator, Deduct	*-1,072.42*	
01 22 23 00-1248	WK	200 Ton Lift, Cable Controlled Lattice Boom, Crawler Mechanical Crane With Full-Time Operator	18,437.77	
		For Equipment Without Operator, Deduct	*-5,362.08*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-1249	MO	200 Ton Lift, Cable Controlled Lattice Boom, Crawler Mechanical Crane With Full-Time Operator	62,458.44	
		For Equipment Without Operator, Deduct	*-23,235.68*	
		For >6 Months (>26 Weeks), Deduct	*-1,568.91*	
01 22 23 00-1250	DAY	250 Ton Lift, Cable Controlled Lattice Boom, Crawler Mechanical Crane With Full-Time Operator	5,179.67	
		For Equipment Without Operator, Deduct	*-1,072.42*	
01 22 23 00-1251	WK	250 Ton Lift, Cable Controlled Lattice Boom, Crawler Mechanical Crane With Full-Time Operator	20,010.30	
		For Equipment Without Operator, Deduct	*-5,362.08*	
01 22 23 00-1252	MO	250 Ton Lift, Cable Controlled Lattice Boom, Crawler Mechanical Crane With Full-Time Operator	67,180.34	
		For Equipment Without Operator, Deduct	*-23,235.68*	
		For >6 Months (>26 Weeks), Deduct	*-1,757.79*	
01 22 23 00-1253	DAY	300 Ton Lift, Cable Controlled Lattice Boom, Crawler Mechanical Crane With Full-Time Operator	5,854.63	
		For Equipment Without Operator, Deduct	*-1,072.42*	
01 22 23 00-1254	WK	300 Ton Lift, Cable Controlled Lattice Boom, Crawler Mechanical Crane With Full-Time Operator	22,430.13	
		For Equipment Without Operator, Deduct	*-5,362.08*	
01 22 23 00-1255	MO	300 Ton Lift, Cable Controlled Lattice Boom, Crawler Mechanical Crane With Full-Time Operator	74,429.77	
		For Equipment Without Operator, Deduct	*-23,235.68*	
		For >6 Months (>26 Weeks), Deduct	*-2,047.76*	
01 22 23 00-1256	DAY	500 Ton Lift, Cable Controlled Lattice Boom, Crawler Mechanical Crane With Full-Time Operator	10,004.96	
		For Equipment Without Operator, Deduct	*-1,072.42*	
01 22 23 00-1257	WK	500 Ton Lift, Cable Controlled Lattice Boom, Crawler Mechanical Crane With Full-Time Operator	37,221.96	
		For Equipment Without Operator, Deduct	*-5,362.08*	
01 22 23 00-1258	MO	500 Ton Lift, Cable Controlled Lattice Boom, Crawler Mechanical Crane With Full-Time Operator	118,822.50	
		For Equipment Without Operator, Deduct	*-23,235.68*	
		For >6 Months (>26 Weeks), Deduct	*-3,823.47*	

01 22 23 00-1259 Telescopic Boom, Hi-Reach, Rough Terrain Construction Forklifts *(01 22 23 00-1187)*

Note: Includes full-time operator. Excludes delivery, set-up, and removal.

01 22 23 00-1260	DAY	5,000 Lb. Capacity, Telescopic Boom, Hi-Reach, Rough Terrain Construction Forklift With Full-Time Operator	1,633.08	
		For Equipment Without Operator, Deduct	*-1,004.52*	
		For Half Day Usage, Deduct	*-698.69*	
01 22 23 00-1261	WK	5,000 Lb. Capacity, Telescopic Boom, Hi-Reach, Rough Terrain Construction Forklift With Full-Time Operator	6,560.90	
		For Equipment Without Operator, Deduct	*-5,022.59*	
01 22 23 00-1262	MO	5,000 Lb. Capacity, Telescopic Boom, Hi-Reach, Rough Terrain Construction Forklift With Full-Time Operator	25,072.75	
		For Equipment Without Operator, Deduct	*-21,764.55*	
		For >6 Months (>26 Weeks), Deduct	*-132.33*	
01 22 23 00-1263	DAY	6,000 Lb. Capacity, Telescopic Boom, Hi-Reach, Rough Terrain Construction Forklift With Full-Time Operator	1,699.24	
		For Equipment Without Operator, Deduct	*-1,004.52*	
		For Half Day Usage, Deduct	*-719.36*	
01 22 23 00-1264	WK	6,000 Lb. Capacity, Telescopic Boom, Hi-Reach, Rough Terrain Construction Forklift With Full-Time Operator	6,709.77	
		For Equipment Without Operator, Deduct	*-5,022.59*	
01 22 23 00-1265	MO	6,000 Lb. Capacity, Telescopic Boom, Hi-Reach, Rough Terrain Construction Forklift With Full-Time Operator	25,403.57	
		For Equipment Without Operator, Deduct	*-21,764.55*	
		For >6 Months (>26 Weeks), Deduct	*-145.56*	
01 22 23 00-1266	DAY	8,000 Lb. Capacity, Telescopic Boom, Hi-Reach, Rough Terrain Construction Forklift With Full-Time Operator	1,682.70	
		For Equipment Without Operator, Deduct	*-1,004.52*	
		For Half Day Usage, Deduct	*-714.19*	
01 22 23 00-1267	WK	8,000 Lb. Capacity, Telescopic Boom, Hi-Reach, Rough Terrain Construction Forklift With Full-Time Operator	6,784.21	
		For Equipment Without Operator, Deduct	*-5,022.59*	
01 22 23 00-1268	MO	8,000 Lb. Capacity, Telescopic Boom, Hi-Reach, Rough Terrain Construction Forklift With Full-Time Operator	25,899.80	
		For Equipment Without Operator, Deduct	*-21,764.55*	
		For >6 Months (>26 Weeks), Deduct	*-165.41*	
01 22 23 00-1269	DAY	10,000 Lb. Capacity, Telescopic Boom, Hi-Reach, Rough Terrain Construction Forklift With Full-Time Operator	1,872.92	
		For Equipment Without Operator, Deduct	*-1,004.52*	
		For Half Day Usage, Deduct	*-773.64*	
01 22 23 00-1270	WK	10,000 Lb. Capacity, Telescopic Boom, Hi-Reach, Rough Terrain Construction Forklift With Full-Time Operator	7,280.44	
		For Equipment Without Operator, Deduct	*-5,022.59*	
01 22 23 00-1271	MO	10,000 Lb. Capacity, Telescopic Boom, Hi-Reach, Rough Terrain Construction Forklift With Full-Time Operator	27,057.67	
		For Equipment Without Operator, Deduct	*-21,764.55*	
		For >6 Months (>26 Weeks), Deduct	*-211.72*	

01 22 23 00-1272 Straight Mast, Rough Terrain Construction Forklifts *(01 22 23 00-1187)*

Note: Includes full-time operator. Excludes delivery, set-up, and removal.

01 22 23 00-1273	DAY	5,000 Lb. Capacity, Straight Mast, Rough Terrain Construction Forklift With Full-Time Operator	1,413.08	
		For Equipment Without Operator, Deduct	*-1,004.52*	
		For Propane Instead Of Gas Or Diesel, Add	*81.71*	
		For Half Day Usage, Deduct	*-629.94*	
01 22 23 00-1274	WK	5,000 Lb. Capacity, Straight Mast, Rough Terrain Construction Forklift With Full-Time Operator	6,138.28	
		For Equipment Without Operator, Deduct	*-5,022.59*	
		For Propane Instead Of Gas Or Diesel, Add	*223.14*	
01 22 23 00-1275	MO	5,000 Lb. Capacity, Straight Mast, Rough Terrain Construction Forklift With Full-Time Operator	24,318.07	
		For Equipment Without Operator, Deduct	*-21,764.55*	
		For Propane Instead Of Gas Or Diesel, Add	*510.70*	
		For >6 Months (>26 Weeks), Deduct	*-102.14*	
01 22 23 00-1276	DAY	6,000 Lb. Capacity, Straight Mast, Rough Terrain Construction Forklift With Full-Time Operator	1,434.59	
		For Equipment Without Operator, Deduct	*-1,004.52*	
		For Propane Instead Of Gas Or Diesel, Add	*86.01*	
		For Half Day Usage, Deduct	*-636.66*	
01 22 23 00-1277	WK	6,000 Lb. Capacity, Straight Mast, Rough Terrain Construction Forklift With Full-Time Operator	6,197.00	
		For Equipment Without Operator, Deduct	*-5,022.59*	
		For Propane Instead Of Gas Or Diesel, Add	*234.88*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-1278	MO	6,000 Lb. Capacity, Straight Mast, Rough Terrain Construction Forklift With Full-Time Operator	24,452.46	
		For Equipment Without Operator, Deduct	*-21,764.55*	
		For Propane Instead Of Gas Or Diesel, Add	*537.58*	
		For >6 Months (>26 Weeks), Deduct	*-107.52*	
01 22 23 00-1279	DAY	8,000 Lb. Capacity, Straight Mast, Rough Terrain Construction Forklift With Full-Time Operator	1,550.37	
		For Equipment Without Operator, Deduct	*-1,004.52*	
		For Propane Instead Of Gas Or Diesel, Add	*109.17*	
		For Half Day Usage, Deduct	*-672.84*	
01 22 23 00-1280	WK	8,000 Lb. Capacity, Straight Mast, Rough Terrain Construction Forklift With Full-Time Operator	6,519.55	
		For Equipment Without Operator, Deduct	*-5,022.59*	
		For Propane Instead Of Gas Or Diesel, Add	*299.39*	
01 22 23 00-1281	MO	8,000 Lb. Capacity, Straight Mast, Rough Terrain Construction Forklift With Full-Time Operator	25,196.81	
		For Equipment Without Operator, Deduct	*-21,764.55*	
		For Propane Instead Of Gas Or Diesel, Add	*686.45*	
		For >6 Months (>26 Weeks), Deduct	*-137.29*	
01 22 23 00-1282	DAY	10,000 Lb. Capacity, Straight Mast, Rough Terrain Construction Forklift With Full-Time Operator	1,614.14	
		For Equipment Without Operator, Deduct	*-1,004.52*	
		For Propane Instead Of Gas Or Diesel, Add	*121.92*	
		For Half Day Usage, Deduct	*-692.77*	
01 22 23 00-1283	WK	10,000 Lb. Capacity, Straight Mast, Rough Terrain Construction Forklift With Full-Time Operator	6,491.93	
		For Equipment Without Operator, Deduct	*-5,022.59*	
		For Propane Instead Of Gas Or Diesel, Add	*293.87*	
01 22 23 00-1284	MO	10,000 Lb. Capacity, Straight Mast, Rough Terrain Construction Forklift With Full-Time Operator	25,422.26	
		For Equipment Without Operator, Deduct	*-21,764.55*	
		For Propane Instead Of Gas Or Diesel, Add	*731.54*	
		For >6 Months (>26 Weeks), Deduct	*-146.31*	

01 22 23 00-1285 Straight Mast, Industrial Warehouse Forklifts *(01 22 23 00-1187)*

Note: Includes full-time operator. Excludes delivery, set-up, and removal.

01 22 23 00-1286	DAY	5,000 Lb. Capacity, Straight Mast, Industrial Warehouse Forklift With Full-Time Operator	1,351.88	
		For Equipment Without Operator, Deduct	*-1,004.52*	
		For Propane Instead Of Gas Or Diesel, Add	*69.47*	
		For Half Day Usage, Deduct	*-610.81*	
01 22 23 00-1287	WK	5,000 Lb. Capacity, Straight Mast, Industrial Warehouse Forklift With Full-Time Operator	5,816.56	
		For Equipment Without Operator, Deduct	*-5,022.59*	
		For Propane Instead Of Gas Or Diesel, Add	*158.79*	
01 22 23 00-1288	MO	5,000 Lb. Capacity, Straight Mast, Industrial Warehouse Forklift With Full-Time Operator	23,666.77	
		For Equipment Without Operator, Deduct	*-21,764.55*	
		For Propane Instead Of Gas Or Diesel, Add	*380.44*	
		For >6 Months (>26 Weeks), Deduct	*-76.09*	
01 22 23 00-1289	DAY	6,000 Lb. Capacity, Straight Mast, Industrial Warehouse Forklift With Full-Time Operator	1,360.15	
		For Equipment Without Operator, Deduct	*-1,004.52*	
		For Propane Instead Of Gas Or Diesel, Add	*71.13*	
		For Half Day Usage, Deduct	*-613.39*	
01 22 23 00-1290	WK	6,000 Lb. Capacity, Straight Mast, Industrial Warehouse Forklift With Full-Time Operator	5,841.37	
		For Equipment Without Operator, Deduct	*-5,022.59*	
		For Propane Instead Of Gas Or Diesel, Add	*163.76*	
01 22 23 00-1291	MO	6,000 Lb. Capacity, Straight Mast, Industrial Warehouse Forklift With Full-Time Operator	23,724.66	
		For Equipment Without Operator, Deduct	*-21,764.55*	
		For Propane Instead Of Gas Or Diesel, Add	*392.02*	
		For >6 Months (>26 Weeks), Deduct	*-78.40*	
01 22 23 00-1292	DAY	8,000 Lb. Capacity, Straight Mast, Industrial Warehouse Forklift With Full-Time Operator	1,533.83	
		For Equipment Without Operator, Deduct	*-1,004.52*	
		For Propane Instead Of Gas Or Diesel, Add	*105.86*	
		For Half Day Usage, Deduct	*-667.67*	
01 22 23 00-1293	WK	8,000 Lb. Capacity, Straight Mast, Industrial Warehouse Forklift With Full-Time Operator	6,221.81	
		For Equipment Without Operator, Deduct	*-5,022.59*	
		For Propane Instead Of Gas Or Diesel, Add	*239.84*	
01 22 23 00-1294	MO	8,000 Lb. Capacity, Straight Mast, Industrial Warehouse Forklift With Full-Time Operator	24,659.23	
		For Equipment Without Operator, Deduct	*-21,764.55*	
		For Propane Instead Of Gas Or Diesel, Add	*578.94*	
		For >6 Months (>26 Weeks), Deduct	*-115.79*	
01 22 23 00-1295	DAY	12,000 Lb. Capacity, Straight Mast, Industrial Warehouse Forklift With Full-Time Operator	1,550.37	
		For Equipment Without Operator, Deduct	*-1,004.52*	
		For Propane Instead Of Gas Or Diesel, Add	*109.17*	
		For Half Day Usage, Deduct	*-672.84*	
01 22 23 00-1296	WK	12,000 Lb. Capacity, Straight Mast, Industrial Warehouse Forklift With Full-Time Operator	6,362.41	
		For Equipment Without Operator, Deduct	*-5,022.59*	
		For Propane Instead Of Gas Or Diesel, Add	*267.96*	
01 22 23 00-1297	MO	12,000 Lb. Capacity, Straight Mast, Industrial Warehouse Forklift With Full-Time Operator	25,155.45	
		For Equipment Without Operator, Deduct	*-21,764.55*	
		For Propane Instead Of Gas Or Diesel, Add	*678.18*	
		For >6 Months (>26 Weeks), Deduct	*-135.64*	
01 22 23 00-1298	DAY	15,000 Lb. Capacity, Straight Mast, Industrial Warehouse Forklift With Full-Time Operator	1,699.24	
		For Equipment Without Operator, Deduct	*-1,004.52*	
		For Propane Instead Of Gas Or Diesel, Add	*138.94*	
		For Half Day Usage, Deduct	*-719.36*	
01 22 23 00-1299	WK	15,000 Lb. Capacity, Straight Mast, Industrial Warehouse Forklift With Full-Time Operator	6,602.26	
		For Equipment Without Operator, Deduct	*-5,022.59*	
		For Propane Instead Of Gas Or Diesel, Add	*315.93*	
01 22 23 00-1300	MO	15,000 Lb. Capacity, Straight Mast, Industrial Warehouse Forklift With Full-Time Operator	25,568.98	
		For Equipment Without Operator, Deduct	*-21,764.55*	
		For Propane Instead Of Gas Or Diesel, Add	*760.89*	
		For >6 Months (>26 Weeks), Deduct	*-152.18*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-1301		**Chain Hoists** *(01 22 23 00-1187)*		
		Note: Includes delivery to job site and pick-up when complete.		
01 22 23 00-1302	DAY	1 Ton, 20' Lift, Manual Chain Hoist	12.52	
		For Half Day Usage, Deduct	*-3.91*	
01 22 23 00-1303	WK	1 Ton, 20' Lift, Manual Chain Hoist	32.55	
01 22 23 00-1304	MO	1 Ton, 20' Lift, Manual Chain Hoist	96.40	
		For >6 Months (>26 Weeks), Deduct	*-3.86*	
01 22 23 00-1305	DAY	3 Ton, 20' Lift, Manual Chain Hoist	35.06	
		For Half Day Usage, Deduct	*-10.96*	
01 22 23 00-1306	WK	3 Ton, 20' Lift, Manual Chain Hoist	82.63	
01 22 23 00-1307	MO	3 Ton, 20' Lift, Manual Chain Hoist	231.62	
		For >6 Months (>26 Weeks), Deduct	*-9.26*	
01 22 23 00-1308	DAY	5 Ton, 20' Lift, Manual Chain Hoist	45.07	
		For Half Day Usage, Deduct	*-14.08*	
01 22 23 00-1309	WK	5 Ton, 20' Lift, Manual Chain Hoist	121.44	
01 22 23 00-1310	MO	5 Ton, 20' Lift, Manual Chain Hoist	338.04	
		For >6 Months (>26 Weeks), Deduct	*-13.52*	
01 22 23 00-1311	DAY	2 Ton, 20' Lift, 2-Speed, 230/460 Volt, 60 Cycle, Electric Chain Hoist	88.89	
		For Half Day Usage, Deduct	*-27.78*	
01 22 23 00-1312	WK	2 Ton, 20' Lift, 2-Speed, 230/460 Volt, 60 Cycle, Electric Chain Hoist	231.62	
01 22 23 00-1313	MO	2 Ton, 20' Lift, 2-Speed, 230/460 Volt, 60 Cycle, Electric Chain Hoist	626.00	
		For >6 Months (>26 Weeks), Deduct	*-25.04*	
01 22 23 00-1314	DAY	3 Ton, 20' Lift, 2-Speed, 230/460 Volt, 60 Cycle, Electric Chain Hoist	90.14	
		For Half Day Usage, Deduct	*-28.17*	
01 22 23 00-1315	WK	3 Ton, 20' Lift, 2-Speed, 230/460 Volt, 60 Cycle, Electric Chain Hoist	241.01	
01 22 23 00-1316	MO	3 Ton, 20' Lift, 2-Speed, 230/460 Volt, 60 Cycle, Electric Chain Hoist	657.30	
		For >6 Months (>26 Weeks), Deduct	*-26.29*	
01 22 23 00-1317	DAY	5 Ton, 20' Lift, 2-Speed, 230/460 Volt, 60 Cycle, Electric Chain Hoist	92.65	
		For Half Day Usage, Deduct	*-28.95*	
01 22 23 00-1318	WK	5 Ton, 20' Lift, 2-Speed, 230/460 Volt, 60 Cycle, Electric Chain Hoist	259.79	
01 22 23 00-1319	MO	5 Ton, 20' Lift, 2-Speed, 230/460 Volt, 60 Cycle, Electric Chain Hoist	719.90	
		For >6 Months (>26 Weeks), Deduct	*-28.80*	
01 22 23 00-1320		**Roof Swing Hoist** *(01 22 23 00-1187)*		
		Note: Includes delivery to job site and pick-up when complete.		
01 22 23 00-1321	DAY	Up To 400 Lb., Manual Swing Roof Hoist	106.00	
		For Half Day Usage, Deduct	*-33.13*	
01 22 23 00-1322	WK	Up To 400 Lb., Manual Swing Roof Hoist	371.02	
01 22 23 00-1323	MO	Up To 400 Lb., Manual Swing Roof Hoist	1,272.06	
		For >6 Months (>26 Weeks), Deduct	*-50.88*	
01 22 23 00-1324		**Truck Mounted Digger Derrick** *(01 22 23 00-1187)*		
		Note: Includes full-time operator, delivery, set-up, and removal time in rental period. Lifting capacity is reduced.		
01 22 23 00-1325	DAY	Up To 47' Sheave Height, 34' Horizontal Reach, 12 Ton Capacity, Truck Mounted Hydraulic Digger Derrick With Full-Time Operator	1,752.24	
		Note: Includes lifting boom, grapple arm and auger drill.		
		For Equipment Without Operator, Deduct	*-1,072.42*	
		For Half Day Usage, Deduct	*-748.65*	
01 22 23 00-1326	WK	Up To 47' Sheave Height, 34' Horizontal Reach, 12 Ton Capacity, Truck Mounted Hydraulic Digger Derrick With Full-Time Operator	7,401.54	
		Note: Includes lifting boom, grapple arm and auger drill.		
		For Equipment Without Operator, Deduct	*-5,362.08*	
01 22 23 00-1327	MO	Up To 47' Sheave Height, 34' Horizontal Reach, 12 Ton Capacity, Truck Mounted Hydraulic Digger Derrick With Full-Time Operator	28,674.24	
		Note: Includes lifting boom, grapple arm and auger drill.		
		For Equipment Without Operator, Deduct	*-23,235.68*	
		For >6 Months (>26 Weeks), Deduct	*-217.54*	
01 22 23 00-1328	DAY	Up To 48' Sheave Height, 38' Horizontal Reach, 15 Ton Capacity, Truck Mounted Hydraulic Digger Derrick With Full-Time Operator	1,891.97	
		Note: Includes lifting boom, grapple arm and auger drill.		
		For Equipment Without Operator, Deduct	*-1,072.42*	
		For Half Day Usage, Deduct	*-792.32*	
01 22 23 00-1329	WK	Up To 48' Sheave Height, 38' Horizontal Reach, 15 Ton Capacity, Truck Mounted Hydraulic Digger Derrick With Full-Time Operator	7,820.73	
		Note: Includes lifting boom, grapple arm and auger drill.		
		For Equipment Without Operator, Deduct	*-5,362.08*	
01 22 23 00-1330	MO	Up To 48' Sheave Height, 38' Horizontal Reach, 15 Ton Capacity, Truck Mounted Hydraulic Digger Derrick With Full-Time Operator	29,792.09	
		Note: Includes lifting boom, grapple arm and auger drill.		
		For Equipment Without Operator, Deduct	*-23,235.68*	
		For >6 Months (>26 Weeks), Deduct	*-262.26*	
01 22 23 00-1331	DAY	Up To 65' Sheave Height, 55' Horizontal Reach, 21 Ton Capacity, Truck Mounted Hydraulic Digger Derrick With Full-Time Operator	2,755.43	
		Note: Includes lifting boom, grapple arm and auger drill.		
		For Equipment Without Operator, Deduct	*-1,072.42*	
		For Half Day Usage, Deduct	*-1,062.15*	
01 22 23 00-1332	WK	Up To 65' Sheave Height, 55' Horizontal Reach, 21 Ton Capacity, Truck Mounted Hydraulic Digger Derrick With Full-Time Operator	10,411.11	
		Note: Includes lifting boom, grapple arm and auger drill.		
		For Equipment Without Operator, Deduct	*-5,362.08*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-1333	MO	Up To 65' Sheave Height, 55' Horizontal Reach, 21 Ton Capacity, Truck Mounted Hydraulic Digger Derrick With Full-Time Operator	36,699.76	
		Note: Includes lifting boom, grapple arm and auger drill.		
		For Equipment Without Operator, Deduct	*-23,235.68*	
		For >6 Months (>26 Weeks), Deduct	*-538.56*	

01 22 23 00-1334 Pumping Equipment *(01 22 23)*

01 22 23 00-1335 Gas Powered Portable Centrifugal Pumps *(01 22 23 00-1334)*

Note: Includes delivery, set-up, and removal. Excludes operator. See CSI section 01 22 23 00-1359 for larger diameter pumps.

01 22 23 00-1336	DAY	8,500 GPH, 2" Discharge, 108' Maximum Head, Gas Powered Portable Centrifugal Pump	85.33	
		For >8 To 16 Hours Usage Per Day, Add	*34.13*	
		For >16 To 24 Hours Usage Per Day, Add	*68.26*	
01 22 23 00-1337	WK	8,500 GPH, 2" Discharge, 108' Maximum Head, Gas Powered Portable Centrifugal Pump	192.00	
		For >40 To 80 Hours Usage Per Week, Add	*76.80*	
		For >80 Hours Usage Per Week, Add	*153.60*	
01 22 23 00-1338	MO	8,500 GPH, 2" Discharge, 108' Maximum Head, Gas Powered Portable Centrifugal Pump	511.99	
		For >160 To 320 Hours Usage Per Month, Add	*204.80*	
		For >320 Hours Usage Per Month, Add	*409.59*	
		For >6 Months (>26 Weeks), Deduct	*-20.48*	
01 22 23 00-1339	DAY	16,500 GPH, 3" Discharge, 85' Maximum Head, Gas Powered Portable Centrifugal Pump	102.40	
		For >8 To 16 Hours Usage Per Day, Add	*40.96*	
		For >16 To 24 Hours Usage Per Day, Add	*81.92*	
01 22 23 00-1340	WK	16,500 GPH, 3" Discharge, 85' Maximum Head, Gas Powered Portable Centrifugal Pump	230.40	
		For >40 To 80 Hours Usage Per Week, Add	*92.16*	
		For >80 Hours Usage Per Week, Add	*184.32*	
01 22 23 00-1341	MO	16,500 GPH, 3" Discharge, 85' Maximum Head, Gas Powered Portable Centrifugal Pump	614.39	
		For >160 To 320 Hours Usage Per Month, Add	*245.76*	
		For >320 Hours Usage Per Month, Add	*491.51*	
		For >6 Months (>26 Weeks), Deduct	*-24.58*	

01 22 23 00-1342 Gas Powered Portable Diaphragm Pumps *(01 22 23 00-1334)*

Note: Includes delivery, set-up, and removal. Excludes operator.

01 22 23 00-1343	DAY	3,000 GPH, 2" Discharge, 25' Maximum Head, Gas Powered Portable Diaphragm Pump	98.13	
		For >8 To 16 Hours Usage Per Day, Add	*39.25*	
		For >16 To 24 Hours Usage Per Day, Add	*78.50*	
01 22 23 00-1344	WK	3,000 GPH, 2" Discharge, 25' Maximum Head, Gas Powered Portable Diaphragm Pump	277.33	
		For >40 To 80 Hours Usage Per Week, Add	*110.93*	
		For >80 Hours Usage Per Week, Add	*221.86*	
01 22 23 00-1345	MO	3,000 GPH, 2" Discharge, 25' Maximum Head, Gas Powered Portable Diaphragm Pump	703.99	
		For >160 To 320 Hours Usage Per Month, Add	*281.60*	
		For >320 Hours Usage Per Month, Add	*563.19*	
		For >6 Months (>26 Weeks), Deduct	*-28.16*	
01 22 23 00-1346	DAY	5,200 GPH, 3" Discharge, 25' Maximum Head, Gas Powered Portable Diaphragm Pump	119.46	
		For >8 To 16 Hours Usage Per Day, Add	*47.78*	
		For >16 To 24 Hours Usage Per Day, Add	*95.57*	
01 22 23 00-1347	WK	5,200 GPH, 3" Discharge, 25' Maximum Head, Gas Powered Portable Diaphragm Pump	320.00	
		For >40 To 80 Hours Usage Per Week, Add	*128.00*	
		For >80 Hours Usage Per Week, Add	*256.00*	
01 22 23 00-1348	MO	5,200 GPH, 3" Discharge, 25' Maximum Head, Gas Powered Portable Diaphragm Pump	906.65	
		For >160 To 320 Hours Usage Per Month, Add	*362.66*	
		For >320 Hours Usage Per Month, Add	*725.32*	
		For >6 Months (>26 Weeks), Deduct	*-36.27*	

01 22 23 00-1349 Gas Powered Portable Trash Pumps *(01 22 23 00-1334)*

Note: Includes delivery, set-up, and removal. Excludes operator.

01 22 23 00-1350	DAY	12,000 GPH, 2" Discharge, 100' Maximum Head, Gas Powered Portable Trash Pump	123.73	
		For >8 To 16 Hours Usage Per Day, Add	*49.49*	
		For >16 To 24 Hours Usage Per Day, Add	*98.98*	
01 22 23 00-1351	WK	12,000 GPH, 2" Discharge, 100' Maximum Head, Gas Powered Portable Trash Pump	256.00	
		For >40 To 80 Hours Usage Per Week, Add	*102.40*	
		For >80 Hours Usage Per Week, Add	*204.80*	
01 22 23 00-1352	MO	12,000 GPH, 2" Discharge, 100' Maximum Head, Gas Powered Portable Trash Pump	767.99	
		For >160 To 320 Hours Usage Per Month, Add	*307.20*	
		For >320 Hours Usage Per Month, Add	*614.39*	
		For >6 Months (>26 Weeks), Deduct	*-30.72*	
01 22 23 00-1353	DAY	25,000 GPH, 3" Discharge, 90' Maximum Head, Gas Powered Portable Trash Pump	123.73	
		For >8 To 16 Hours Usage Per Day, Add	*49.49*	
		For >16 To 24 Hours Usage Per Day, Add	*98.98*	
01 22 23 00-1354	WK	25,000 GPH, 3" Discharge, 90' Maximum Head, Gas Powered Portable Trash Pump	330.66	
		For >40 To 80 Hours Usage Per Week, Add	*132.26*	
		For >80 Hours Usage Per Week, Add	*264.53*	
01 22 23 00-1355	MO	25,000 GPH, 3" Discharge, 90' Maximum Head, Gas Powered Portable Trash Pump	906.65	
		For >160 To 320 Hours Usage Per Month, Add	*362.66*	
		For >320 Hours Usage Per Month, Add	*725.32*	
		For >6 Months (>26 Weeks), Deduct	*-36.27*	
01 22 23 00-1356	DAY	35,000 GPH, 4" Discharge, 106' Maximum Head, Gas Powered Portable Trash Pump	196.26	
		For >8 To 16 Hours Usage Per Day, Add	*78.50*	
		For >16 To 24 Hours Usage Per Day, Add	*157.01*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-1357	WK	35,000 GPH, 4" Discharge, 106' Maximum Head, Gas Powered Portable Trash Pump	554.66	
		For >40 To 80 Hours Usage Per Week, Add	*221.86*	
		For >80 Hours Usage Per Week, Add	*443.73*	
01 22 23 00-1358	MO	35,000 GPH, 4" Discharge, 106' Maximum Head, Gas Powered Portable Trash Pump	1,610.64	
		For >160 To 320 Hours Usage Per Month, Add	*644.26*	
		For >320 Hours Usage Per Month, Add	*1,288.51*	
		For >6 Months (>26 Weeks), Deduct	*-64.43*	

01 22 23 00-1359 Diesel Powered Portable Trash Pumps *(01 22 23 00-1334)*

Note: Includes delivery, set-up, and removal. Excludes operator.

01 22 23 00-1360	DAY	63,000 GPH, 4" Discharge, 153' Maximum Head, Diesel Powered Portable Trash Pump	383.99	
		For >8 To 16 Hours Usage Per Day, Add	*153.60*	
		For >16 To 24 Hours Usage Per Day, Add	*307.19*	
01 22 23 00-1361	WK	63,000 GPH, 4" Discharge, 153' Maximum Head, Diesel Powered Portable Trash Pump	1,045.32	
		For >40 To 80 Hours Usage Per Week, Add	*418.13*	
		For >80 Hours Usage Per Week, Add	*836.26*	
01 22 23 00-1362	MO	63,000 GPH, 4" Discharge, 153' Maximum Head, Diesel Powered Portable Trash Pump	4,554.60	
		For >160 To 320 Hours Usage Per Month, Add	*1,821.84*	
		For >320 Hours Usage Per Month, Add	*3,643.68*	
		For >6 Months (>26 Weeks), Deduct	*-182.18*	
01 22 23 00-1363	DAY	156,000 GPH, 6" Discharge, 160' Maximum Head, Diesel Powered Portable Trash Pump	586.66	
		For >8 To 16 Hours Usage Per Day, Add	*234.66*	
		For >16 To 24 Hours Usage Per Day, Add	*469.33*	
01 22 23 00-1364	WK	156,000 GPH, 6" Discharge, 160' Maximum Head, Diesel Powered Portable Trash Pump	1,535.98	
		For >40 To 80 Hours Usage Per Week, Add	*614.39*	
		For >80 Hours Usage Per Week, Add	*1,228.78*	
01 22 23 00-1365	MO	156,000 GPH, 6" Discharge, 160' Maximum Head, Diesel Powered Portable Trash Pump	4,085.27	
		For >160 To 320 Hours Usage Per Month, Add	*1,634.11*	
		For >320 Hours Usage Per Month, Add	*3,268.22*	
		For >6 Months (>26 Weeks), Deduct	*-163.41*	
01 22 23 00-1366	DAY	246,000 GPH, 10" Discharge, 160' Maximum Head, Diesel Powered Portable Trash Pump	797.85	
		For >8 To 16 Hours Usage Per Day, Add	*319.14*	
		For >16 To 24 Hours Usage Per Day, Add	*638.28*	
01 22 23 00-1367	WK	246,000 GPH, 10" Discharge, 160' Maximum Head, Diesel Powered Portable Trash Pump	2,135.43	
		For >40 To 80 Hours Usage Per Week, Add	*854.17*	
		For >80 Hours Usage Per Week, Add	*1,708.34*	
01 22 23 00-1368	MO	246,000 GPH, 10" Discharge, 160' Maximum Head, Diesel Powered Portable Trash Pump	5,712.98	
		For >160 To 320 Hours Usage Per Month, Add	*2,285.19*	
		For >320 Hours Usage Per Month, Add	*4,570.38*	
		For >6 Months (>26 Weeks), Deduct	*-228.52*	
01 22 23 00-1369	DAY	379,000 GPH, 12" Discharge, 104' Maximum Head, Diesel Powered Portable Trash Pump	1,032.52	
		For >8 To 16 Hours Usage Per Day, Add	*413.01*	
		For >16 To 24 Hours Usage Per Day, Add	*826.02*	
01 22 23 00-1370	WK	379,000 GPH, 12" Discharge, 104' Maximum Head, Diesel Powered Portable Trash Pump	2,636.76	
		For >40 To 80 Hours Usage Per Week, Add	*1,054.70*	
		For >80 Hours Usage Per Week, Add	*2,109.41*	
01 22 23 00-1371	MO	379,000 GPH, 12" Discharge, 104' Maximum Head, Diesel Powered Portable Trash Pump	7,743.88	
		For >160 To 320 Hours Usage Per Month, Add	*3,097.55*	
		For >320 Hours Usage Per Month, Add	*6,195.10*	
		For >6 Months (>26 Weeks), Deduct	*-309.76*	

01 22 23 00-1372 Diesel Powered Portable High Head Trash Pumps *(01 22 23 00-1334)*

Note: Includes delivery, set-up, and removal. Excludes operator.

01 22 23 00-1373	DAY	27,000 GPH, 3" Suction, 3" Discharge, 300' Maximum Head, Diesel Powered Portable High Head Trash Pump	511.99	
		For >8 To 16 Hours Usage Per Day, Add	*204.80*	
		For >16 To 24 Hours Usage Per Day, Add	*409.59*	
01 22 23 00-1374	WK	27,000 GPH, 3" Suction, 3" Discharge, 300' Maximum Head, Diesel Powered Portable High Head Trash Pump	1,151.98	
		For >40 To 80 Hours Usage Per Week, Add	*460.79*	
		For >80 Hours Usage Per Week, Add	*921.58*	
01 22 23 00-1375	MO	27,000 GPH, 3" Suction, 3" Discharge, 300' Maximum Head, Diesel Powered Portable High Head Trash Pump	3,071.95	
		For >160 To 320 Hours Usage Per Month, Add	*1,228.78*	
		For >320 Hours Usage Per Month, Add	*2,457.56*	
		For >6 Months (>26 Weeks), Deduct	*-122.88*	
01 22 23 00-1376	DAY	90,000 GPH, 6" Suction, 4" Discharge, 330' Maximum Head, Diesel Powered Portable High Head Trash Pump	767.99	
		For >8 To 16 Hours Usage Per Day, Add	*307.20*	
		For >16 To 24 Hours Usage Per Day, Add	*614.39*	
01 22 23 00-1377	WK	90,000 GPH, 6" Suction, 4" Discharge, 330' Maximum Head, Diesel Powered Portable High Head Trash Pump	2,054.37	
		For >40 To 80 Hours Usage Per Week, Add	*821.75*	
		For >80 Hours Usage Per Week, Add	*1,643.50*	
01 22 23 00-1378	MO	90,000 GPH, 6" Suction, 4" Discharge, 330' Maximum Head, Diesel Powered Portable High Head Trash Pump	5,759.91	
		For >160 To 320 Hours Usage Per Month, Add	*2,303.96*	
		For >320 Hours Usage Per Month, Add	*4,607.93*	
		For >6 Months (>26 Weeks), Deduct	*-230.40*	
01 22 23 00-1379	DAY	135,000 GPH, 8" Suction, 6" Discharge, 320' Maximum Head, Diesel Powered Portable High Head Trash Pump	938.65	
		For >8 To 16 Hours Usage Per Day, Add	*375.46*	
		For >16 To 24 Hours Usage Per Day, Add	*750.92*	
		For Half Day Usage, Deduct	*-293.33*	
01 22 23 00-1380	WK	135,000 GPH, 8" Suction, 6" Discharge, 320' Maximum Head, Diesel Powered Portable High Head Trash Pump	2,111.97	
		For >40 To 80 Hours Usage Per Week, Add	*844.79*	
		For >80 Hours Usage Per Week, Add	*1,689.58*	

copyright 2026 The Gordian Group, Inc.

	MINOR CSI UOM DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-1381	MO 135,000 GPH, 8" Suction, 6" Discharge, 320' Maximum Head, Diesel Powered Portable High Head Trash Pump	5,631.91	
	For >160 To 320 Hours Usage Per Month, Add	*2,252.76*	
	For >320 Hours Usage Per Month, Add	*4,505.53*	
	For >6 Months (>26 Weeks), Deduct	*-225.28*	

01 22 23 00-1382 Diesel Powered Portable Silenced Environmental Trash Pumps *(01 22 23 00-1334)*

Note: Includes delivery, set-up, and removal. Excludes operator.

01 22 23 00-1383	DAY 90,000 GPH, 4" Discharge, 330' Maximum Head, Diesel Powered Portable Silenced Environmental Trash Pump	548.26	
	For >8 To 16 Hours Usage Per Day, Add	*219.30*	
	For >16 To 24 Hours Usage Per Day, Add	*438.61*	
01 22 23 00-1384	WK 90,000 GPH, 4" Discharge, 330' Maximum Head, Diesel Powered Portable Silenced Environmental Trash Pump	1,247.98	
	For >40 To 80 Hours Usage Per Week, Add	*499.19*	
	For >80 Hours Usage Per Week, Add	*998.38*	
01 22 23 00-1385	MO 90,000 GPH, 4" Discharge, 330' Maximum Head, Diesel Powered Portable Silenced Environmental Trash Pump	3,891.14	
	For >160 To 320 Hours Usage Per Month, Add	*1,556.46*	
	For >320 Hours Usage Per Month, Add	*3,112.91*	
	For >6 Months (>26 Weeks), Deduct	*-155.65*	
01 22 23 00-1386	DAY 136,800 GPH, 6" Discharge, 158' Maximum Head, Diesel Powered Portable Silenced Environmental Trash Pump	671.99	
	For >8 To 16 Hours Usage Per Day, Add	*268.80*	
	For >16 To 24 Hours Usage Per Day, Add	*537.59*	
01 22 23 00-1387	WK 136,800 GPH, 6" Discharge, 158' Maximum Head, Diesel Powered Portable Silenced Environmental Trash Pump	1,674.64	
	For >40 To 80 Hours Usage Per Week, Add	*669.86*	
	For >80 Hours Usage Per Week, Add	*1,339.71*	
01 22 23 00-1388	MO 136,800 GPH, 6" Discharge, 158' Maximum Head, Diesel Powered Portable Silenced Environmental Trash Pump	4,554.60	
	For >160 To 320 Hours Usage Per Month, Add	*1,821.84*	
	For >320 Hours Usage Per Month, Add	*3,643.68*	
	For >6 Months (>26 Weeks), Deduct	*-182.18*	
01 22 23 00-1389	DAY 246,000 GPH, 10" Discharge, 158' Maximum Head, Diesel Powered Portable Silenced Environmental Trash Pump	810.65	
	For >8 To 16 Hours Usage Per Day, Add	*324.26*	
	For >16 To 24 Hours Usage Per Day, Add	*648.52*	
01 22 23 00-1390	WK 246,000 GPH, 10" Discharge, 158' Maximum Head, Diesel Powered Portable Silenced Environmental Trash Pump	2,397.83	
	For >40 To 80 Hours Usage Per Week, Add	*959.13*	
	For >80 Hours Usage Per Week, Add	*1,918.26*	
01 22 23 00-1391	MO 246,000 GPH, 10" Discharge, 158' Maximum Head, Diesel Powered Portable Silenced Environmental Trash Pump	6,687.90	
	For >160 To 320 Hours Usage Per Month, Add	*2,675.16*	
	For >320 Hours Usage Per Month, Add	*5,350.32*	
	For >6 Months (>26 Weeks), Deduct	*-267.52*	
01 22 23 00-1392	DAY 510,000 GPH, 12" Discharge, 200' Maximum Head, Diesel Powered Portable Silenced Environmental Trash Pump	1,220.25	
	For >8 To 16 Hours Usage Per Day, Add	*488.10*	
	For >16 To 24 Hours Usage Per Day, Add	*976.20*	
01 22 23 00-1393	WK 510,000 GPH, 12" Discharge, 200' Maximum Head, Diesel Powered Portable Silenced Environmental Trash Pump	3,116.75	
	For >40 To 80 Hours Usage Per Week, Add	*1,246.70*	
	For >80 Hours Usage Per Week, Add	*2,493.40*	
01 22 23 00-1394	MO 510,000 GPH, 12" Discharge, 200' Maximum Head, Diesel Powered Portable Silenced Environmental Trash Pump	9,151.86	
	For >160 To 320 Hours Usage Per Month, Add	*3,660.74*	
	For >320 Hours Usage Per Month, Add	*7,321.49*	
	For >6 Months (>26 Weeks), Deduct	*-366.07*	

01 22 23 00-1395 3 Phase Electric Submersible Pumps *(01 22 23 00-1334)*

Note: Includes delivery, set-up, and removal. Excludes operator.

01 22 23 00-1396	DAY 24,000 GPH, 3" Discharge, 78' Maximum Head, 3 Phase Electric Submersible Pump	213.33	
01 22 23 00-1397	WK 24,000 GPH, 3" Discharge, 78' Maximum Head, 3 Phase Electric Submersible Pump	533.32	
01 22 23 00-1398	MO 24,000 GPH, 3" Discharge, 78' Maximum Head, 3 Phase Electric Submersible Pump	1,599.98	
	For >6 Months (>26 Weeks), Deduct	*-64.00*	
01 22 23 00-1399	DAY 49,800 GPH, 4" Discharge, 98' Maximum Head, 3 Phase Electric Submersible Pump	281.60	
01 22 23 00-1400	WK 49,800 GPH, 4" Discharge, 98' Maximum Head, 3 Phase Electric Submersible Pump	703.99	
01 22 23 00-1401	MO 49,800 GPH, 4" Discharge, 98' Maximum Head, 3 Phase Electric Submersible Pump	2,111.97	
	For >6 Months (>26 Weeks), Deduct	*-84.48*	

01 22 23 00-1402 Suction Hose With Couplings *(01 22 23 00-1334)*

Note: Includes delivery, set-up, and removal.

01 22 23 00-1403	DAY Up To 2" Inside Diameter, 20' Length, Suction Hose With Couplings	4.67	
	For Half Day Usage, Deduct	*-1.46*	
01 22 23 00-1404	WK Up To 2" Inside Diameter, 20' Length, Suction Hose With Couplings	11.67	
01 22 23 00-1405	MO Up To 2" Inside Diameter, 20' Length, Suction Hose With Couplings	35.79	
	For >6 Months (>26 Weeks), Deduct	*-1.43*	
01 22 23 00-1406	DAY 3" Inside Diameter, 20' Length, Suction Hose With Couplings	12.45	
	For Half Day Usage, Deduct	*-3.89*	
01 22 23 00-1407	WK 3" Inside Diameter, 20' Length, Suction Hose With Couplings	31.90	
01 22 23 00-1408	MO 3" Inside Diameter, 20' Length, Suction Hose With Couplings	97.25	
	For >6 Months (>26 Weeks), Deduct	*-3.89*	
01 22 23 00-1409	DAY 4" Inside Diameter, 20' Length, Suction Hose With Couplings	18.67	
	For Half Day Usage, Deduct	*-5.83*	
01 22 23 00-1410	WK 4" Inside Diameter, 20' Length, Suction Hose With Couplings	47.46	
01 22 23 00-1411	MO 4" Inside Diameter, 20' Length, Suction Hose With Couplings	143.93	
	For >6 Months (>26 Weeks), Deduct	*-5.76*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-1412	DAY	6" Inside Diameter, 20' Length, Suction Hose With Couplings	23.34	
		For Half Day Usage, Deduct	*-7.29*	
01 22 23 00-1413	WK	6" Inside Diameter, 20' Length, Suction Hose With Couplings	58.35	
01 22 23 00-1414	MO	6" Inside Diameter, 20' Length, Suction Hose With Couplings	171.16	
		For >6 Months (>26 Weeks), Deduct	*-6.85*	
01 22 23 00-1415	DAY	10" Inside Diameter, 20' Length, Suction Hose With Couplings	54.46	
		For Half Day Usage, Deduct	*-17.02*	
01 22 23 00-1416	WK	10" Inside Diameter, 20' Length, Suction Hose With Couplings	140.04	
01 22 23 00-1417	MO	10" Inside Diameter, 20' Length, Suction Hose With Couplings	412.34	
		For >6 Months (>26 Weeks), Deduct	*-16.49*	
01 22 23 00-1418	DAY	12" Inside Diameter, 20' Length, Suction Hose With Couplings	73.13	
		For Half Day Usage, Deduct	*-22.85*	
01 22 23 00-1419	WK	12" Inside Diameter, 20' Length, Suction Hose With Couplings	159.49	
01 22 23 00-1420	MO	12" Inside Diameter, 20' Length, Suction Hose With Couplings	478.47	
		For >6 Months (>26 Weeks), Deduct	*-19.14*	

01 22 23 00-1421 Discharge Hose With Couplings *(01 22 23 00-1334)*

Note: Includes delivery, set-up, and removal.

01 22 23 00-1422	DAY	1-1/2" Inside Diameter, 50' Length, Discharge Hose With Couplings	4.67	
		For Half Day Usage, Deduct	*-1.46*	
01 22 23 00-1423	WK	1-1/2" Inside Diameter, 50' Length, Discharge Hose With Couplings	11.67	
01 22 23 00-1424	MO	1-1/2" Inside Diameter, 50' Length, Discharge Hose With Couplings	35.79	
		For >6 Months (>26 Weeks), Deduct	*-1.43*	
01 22 23 00-1425	DAY	2" Inside Diameter, 50' Length, Discharge Hose With Couplings	5.45	
		For Half Day Usage, Deduct	*-1.70*	
01 22 23 00-1426	WK	2" Inside Diameter, 50' Length, Discharge Hose With Couplings	13.23	
01 22 23 00-1427	MO	2" Inside Diameter, 50' Length, Discharge Hose With Couplings	41.23	
		For >6 Months (>26 Weeks), Deduct	*-1.65*	
01 22 23 00-1428	DAY	3" Inside Diameter, 50' Length, Discharge Hose With Couplings	6.22	
		For Half Day Usage, Deduct	*-1.94*	
01 22 23 00-1429	WK	3" Inside Diameter, 50' Length, Discharge Hose With Couplings	15.56	
01 22 23 00-1430	MO	3" Inside Diameter, 50' Length, Discharge Hose With Couplings	47.46	
		For >6 Months (>26 Weeks), Deduct	*-1.90*	
01 22 23 00-1431	DAY	4" Inside Diameter, 50' Length, Discharge Hose With Couplings	16.34	
		For Half Day Usage, Deduct	*-5.11*	
01 22 23 00-1432	WK	4" Inside Diameter, 50' Length, Discharge Hose With Couplings	42.01	
01 22 23 00-1433	MO	4" Inside Diameter, 50' Length, Discharge Hose With Couplings	120.59	
		For >6 Months (>26 Weeks), Deduct	*-4.82*	
01 22 23 00-1434	DAY	6" Inside Diameter, 50' Length, Discharge Hose With Couplings	20.23	
		For Half Day Usage, Deduct	*-6.32*	
01 22 23 00-1435	WK	6" Inside Diameter, 50' Length, Discharge Hose With Couplings	55.24	
01 22 23 00-1436	MO	6" Inside Diameter, 50' Length, Discharge Hose With Couplings	151.71	
		For >6 Months (>26 Weeks), Deduct	*-6.07*	
01 22 23 00-1437	DAY	10" Inside Diameter, 10' Length, Discharge Hose With Couplings	15.56	
		For Half Day Usage, Deduct	*-4.86*	
01 22 23 00-1438	WK	10" Inside Diameter, 10' Length, Discharge Hose With Couplings	38.90	
01 22 23 00-1439	MO	10" Inside Diameter, 10' Length, Discharge Hose With Couplings	116.70	
		For >6 Months (>26 Weeks), Deduct	*-4.67*	
01 22 23 00-1440	DAY	12" Inside Diameter, 10' Length, Discharge Hose With Couplings	39.68	
		For Half Day Usage, Deduct	*-12.40*	
01 22 23 00-1441	WK	12" Inside Diameter, 10' Length, Discharge Hose With Couplings	101.14	
01 22 23 00-1442	MO	12" Inside Diameter, 10' Length, Discharge Hose With Couplings	299.53	
		For >6 Months (>26 Weeks), Deduct	*-11.98*	

01 22 23 00-1443 Hydraulic Submersible Pumps *(01 22 23 00-1334)*

Note: Includes delivery, set-up, and removal. Excludes operator.

01 22 23 00-1444 Hydraulic Submersible Pumps *(01 22 23 00-1443)*

Note: Includes delivery, set-up, and removal. Excludes operator.

01 22 23 00-1445	DAY	60,000 GPH, 4" Discharge, 115' Maximum Head, Hydraulic Submersible Pump	140.80	
		For >8 To 16 Hours Usage Per Day, Add	*56.32*	
		For >16 To 24 Hours Usage Per Day, Add	*112.64*	
01 22 23 00-1446	WK	60,000 GPH, 4" Discharge, 115' Maximum Head, Hydraulic Submersible Pump	377.59	
		For >40 To 80 Hours Usage Per Week, Add	*151.04*	
		For >80 Hours Usage Per Week, Add	*302.07*	
01 22 23 00-1447	MO	60,000 GPH, 4" Discharge, 115' Maximum Head, Hydraulic Submersible Pump	1,055.98	
		For >160 To 320 Hours Usage Per Month, Add	*422.39*	
		For >320 Hours Usage Per Month, Add	*844.78*	
		For >6 Months (>26 Weeks), Deduct	*-42.24*	
01 22 23 00-1448	DAY	132,000 GPH, 6" Discharge, 90' Maximum Head, Hydraulic Submersible Pump	179.20	
		For >8 To 16 Hours Usage Per Day, Add	*71.68*	
		For >16 To 24 Hours Usage Per Day, Add	*143.36*	
01 22 23 00-1449	WK	132,000 GPH, 6" Discharge, 90' Maximum Head, Hydraulic Submersible Pump	460.79	
		For >40 To 80 Hours Usage Per Week, Add	*184.32*	
		For >80 Hours Usage Per Week, Add	*368.63*	
01 22 23 00-1450	MO	132,000 GPH, 6" Discharge, 90' Maximum Head, Hydraulic Submersible Pump	1,407.98	
		For >160 To 320 Hours Usage Per Month, Add	*563.19*	
		For >320 Hours Usage Per Month, Add	*1,126.38*	
		For >6 Months (>26 Weeks), Deduct	*-56.32*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-1451		**Hydraulic Submersible Pump Diesel Power Packs** *(01 22 23 00-1443)*		
		Note: Includes delivery, set-up, and removal. Excludes operator.		
01 22 23 00-1452	DAY	100 HP, Hydraulic Submersible Pump Diesel Power Pack	325.33	
		For >8 To 16 Hours Usage Per Day, Add	*130.13*	
		For >16 To 24 Hours Usage Per Day, Add	*260.26*	
01 22 23 00-1453	WK	100 HP, Hydraulic Submersible Pump Diesel Power Pack	970.65	
		For >40 To 80 Hours Usage Per Week, Add	*388.26*	
		For >80 Hours Usage Per Week, Add	*776.52*	
01 22 23 00-1454	MO	100 HP, Hydraulic Submersible Pump Diesel Power Pack	2,559.96	
		For >160 To 320 Hours Usage Per Month, Add	*1,023.98*	
		For >320 Hours Usage Per Month, Add	*2,047.97*	
		For >6 Months (>26 Weeks), Deduct	*-102.40*	
01 22 23 00-1455		**HDPE Pipe With Couplings** *(01 22 23 00-1334)*		
		Note: Includes delivery, set-up, and removal.		
01 22 23 00-1456	DAY	4" Diameter x 50' Length, HDPE Pipe With Couplings	14.70	
		For Half Day Usage, Deduct	*-4.59*	
01 22 23 00-1457	WK	4" Diameter x 50' Length, HDPE Pipe With Couplings	35.27	
01 22 23 00-1458	MO	4" Diameter x 50' Length, HDPE Pipe With Couplings	108.75	
		For >6 Months (>26 Weeks), Deduct	*-4.35*	
01 22 23 00-1459	DAY	6" Diameter x 50' Length, HDPE Pipe With Couplings	23.51	
		For Half Day Usage, Deduct	*-7.35*	
01 22 23 00-1460	WK	6" Diameter x 50' Length, HDPE Pipe With Couplings	58.79	
01 22 23 00-1461	MO	6" Diameter x 50' Length, HDPE Pipe With Couplings	179.30	
		For >6 Months (>26 Weeks), Deduct	*-7.17*	
01 22 23 00-1462	DAY	8" Diameter x 50' Length, HDPE Pipe With Couplings	38.21	
		For Half Day Usage, Deduct	*-11.94*	
01 22 23 00-1463	WK	8" Diameter x 50' HDPE Length, HDPE With Couplings	99.94	
01 22 23 00-1464	MO	8" Diameter x 50' Length, HDPE Pipe With Couplings	296.87	
		For >6 Months (>26 Weeks), Deduct	*-11.87*	
01 22 23 00-1465	DAY	10" Diameter x 50' Length, HDPE Pipe With Couplings	47.03	
		For Half Day Usage, Deduct	*-14.70*	
01 22 23 00-1466	WK	10" Diameter x 50' Length, HDPE Pipe With Couplings	120.51	
01 22 23 00-1467	MO	10" Diameter x 50' Length, HDPE Pipe With Couplings	367.41	
		For >6 Months (>26 Weeks), Deduct	*-14.70*	
01 22 23 00-1468	DAY	12" Diameter x 20' Length, HDPE Pipe With Couplings	35.27	
		For Half Day Usage, Deduct	*-11.02*	
01 22 23 00-1469	WK	12" Diameter x 20' Length, HDPE Pipe With Couplings	97.00	
01 22 23 00-1470	MO	12" Diameter x 20' Length, HDPE Pipe With Couplings	293.93	
		For >6 Months (>26 Weeks), Deduct	*-11.76*	
01 22 23 00-1471	DAY	4" Diameter Elbow For HDPE Pipe, Quick Connect	35.27	
		For Half Day Usage, Deduct	*-11.02*	
01 22 23 00-1472	WK	4" Diameter Elbow For HDPE Pipe, Quick Connect	91.12	
01 22 23 00-1473	MO	4" Diameter Elbow For HDPE Pipe, Quick Connect	270.42	
		For >6 Months (>26 Weeks), Deduct	*-10.82*	
01 22 23 00-1474	DAY	6" Diameter Elbow For HDPE Pipe, Quick Connect	41.15	
		For Half Day Usage, Deduct	*-12.86*	
01 22 23 00-1475	WK	6" Diameter Elbow For HDPE Pipe, Quick Connect	105.81	
01 22 23 00-1476	MO	6" Diameter Elbow For HDPE Pipe, Quick Connect	323.32	
		For >6 Months (>26 Weeks), Deduct	*-12.93*	
01 22 23 00-1477	DAY	8" Diameter Elbow For HDPE Pipe, Quick Connect	47.03	
		For Half Day Usage, Deduct	*-14.70*	
01 22 23 00-1478	WK	8" Diameter Elbow For HDPE Pipe, Quick Connect	120.51	
01 22 23 00-1479	MO	8" Diameter Elbow For HDPE Pipe, Quick Connect	367.41	
		For >6 Months (>26 Weeks), Deduct	*-14.70*	
01 22 23 00-1480	DAY	10" Diameter Elbow For HDPE Pipe, Quick Connect	58.79	
		For Half Day Usage, Deduct	*-18.37*	
01 22 23 00-1481	WK	10" Diameter Elbow For HDPE Pipe, Quick Connect	149.90	
01 22 23 00-1482	MO	10" Diameter Elbow For HDPE Pipe, Quick Connect	455.59	
		For >6 Months (>26 Weeks), Deduct	*-18.22*	
01 22 23 00-1483	DAY	12" Diameter Elbow For HDPE Pipe, Quick Connect	58.79	
		For Half Day Usage, Deduct	*-18.37*	
01 22 23 00-1484	WK	12" Diameter Elbow For HDPE Pipe, Quick Connect	149.90	
01 22 23 00-1485	MO	12" Diameter Elbow For HDPE Pipe, Quick Connect	455.59	
		For >6 Months (>26 Weeks), Deduct	*-18.22*	
01 22 23 00-1486	DAY	4" Diameter Tee For HDPE Pipe, Quick Connect	35.27	
		For Half Day Usage, Deduct	*-11.02*	
01 22 23 00-1487	WK	4" Diameter Tee For HDPE Pipe, Quick Connect	91.12	
01 22 23 00-1488	MO	4" Diameter Tee For HDPE Pipe, Quick Connect	270.42	
		For >6 Months (>26 Weeks), Deduct	*-10.82*	
01 22 23 00-1489	DAY	6" Diameter Tee For HDPE Pipe, Quick Connect	47.03	
		For Half Day Usage, Deduct	*-14.70*	
01 22 23 00-1490	WK	6" Diameter Tee For HDPE Pipe, Quick Connect	120.51	
01 22 23 00-1491	MO	6" Diameter Tee For HDPE Pipe, Quick Connect	367.41	
		For >6 Months (>26 Weeks), Deduct	*-14.70*	
01 22 23 00-1492	DAY	8" Diameter Tee For HDPE Pipe, Quick Connect	58.79	
		For Half Day Usage, Deduct	*-18.37*	
01 22 23 00-1493	WK	8" Diameter Tee For HDPE Pipe, Quick Connect	149.90	
01 22 23 00-1494	MO	8" Diameter Tee For HDPE Pipe, Quick Connect	455.59	
		For >6 Months (>26 Weeks), Deduct	*-18.22*	
01 22 23 00-1495	DAY	10" Diameter Tee For HDPE Pipe, Quick Connect	70.54	
		For Half Day Usage, Deduct	*-22.04*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-1496	WK	10" Diameter Tee For HDPE Pipe, Quick Connect	179.30	
01 22 23 00-1497	MO	10" Diameter Tee For HDPE Pipe, Quick Connect	543.77	
		For >6 Months (>26 Weeks), Deduct	*-21.75*	
01 22 23 00-1498	DAY	12" Diameter Tee For HDPE Pipe, Quick Connect	70.54	
		For Half Day Usage, Deduct	*-22.04*	
01 22 23 00-1499	WK	12" Diameter Tee For HDPE Pipe, Quick Connect	179.30	
01 22 23 00-1500	MO	12" Diameter Tee For HDPE Pipe, Quick Connect	543.77	
		For >6 Months (>26 Weeks), Deduct	*-21.75*	
01 22 23 00-1501	DAY	4" Diameter Cap For HDPE Pipe, Quick Connect	5.88	
		For Half Day Usage, Deduct	*-1.84*	
01 22 23 00-1502	WK	4" Diameter Cap For HDPE Pipe, Quick Connect	17.64	
01 22 23 00-1503	MO	4" Diameter Cap For HDPE Pipe, Quick Connect	52.91	
		For >6 Months (>26 Weeks), Deduct	*-2.12*	
01 22 23 00-1504	DAY	6" Diameter Cap For HDPE Pipe, Quick Connect	5.88	
		For Half Day Usage, Deduct	*-1.84*	
01 22 23 00-1505	WK	6" Diameter Cap For HDPE Pipe, Quick Connect	17.64	
01 22 23 00-1506	MO	6" Diameter Cap For HDPE Pipe, Quick Connect	52.91	
		For >6 Months (>26 Weeks), Deduct	*-2.12*	
01 22 23 00-1507	DAY	8" Diameter Cap For HDPE Pipe, Quick Connect	5.88	
		For Half Day Usage, Deduct	*-1.84*	
01 22 23 00-1508	WK	8" Diameter Cap For HDPE Pipe, Quick Connect	17.64	
01 22 23 00-1509	MO	8" Diameter Cap For HDPE Pipe, Quick Connect	52.91	
		For >6 Months (>26 Weeks), Deduct	*-2.12*	
01 22 23 00-1510	DAY	10" Diameter Cap For HDPE Pipe, Quick Connect	5.88	
		For Half Day Usage, Deduct	*-1.84*	
01 22 23 00-1511	WK	10" Diameter Cap For HDPE Pipe, Quick Connect	17.64	
01 22 23 00-1512	MO	10" Diameter Cap For HDPE Pipe, Quick Connect	52.91	
		For >6 Months (>26 Weeks), Deduct	*-2.12*	
01 22 23 00-1513	DAY	12" Diameter Cap For HDPE Pipe, Quick Connect	5.88	
		For Half Day Usage, Deduct	*-1.84*	
01 22 23 00-1514	WK	12" Diameter Cap For HDPE Pipe, Quick Connect	17.64	
01 22 23 00-1515	MO	12" Diameter Cap For HDPE Pipe, Quick Connect	52.91	
		For >6 Months (>26 Weeks), Deduct	*-2.12*	
01 22 23 00-1516	DAY	4" Diameter Wye For HDPE Pipe, Quick Connect	17.64	
		For Half Day Usage, Deduct	*-5.51*	
01 22 23 00-1517	WK	4" Diameter Wye For HDPE Pipe, Quick Connect	44.09	
01 22 23 00-1518	MO	4" Diameter Wye For HDPE Pipe, Quick Connect	135.21	
		For >6 Months (>26 Weeks), Deduct	*-5.41*	
01 22 23 00-1519	DAY	6" Diameter Wye For HDPE Pipe, Quick Connect	20.58	
		For Half Day Usage, Deduct	*-6.43*	
01 22 23 00-1520	WK	6" Diameter Wye For HDPE Pipe, Quick Connect	52.91	
01 22 23 00-1521	MO	6" Diameter Wye For HDPE Pipe, Quick Connect	161.66	
		For >6 Months (>26 Weeks), Deduct	*-6.47*	
01 22 23 00-1522	DAY	8" Diameter Wye For HDPE Pipe, Quick Connect	35.27	
		For Half Day Usage, Deduct	*-11.02*	
01 22 23 00-1523	WK	8" Diameter Wye For HDPE Pipe, Quick Connect	91.12	
01 22 23 00-1524	MO	8" Diameter Wye For HDPE Pipe, Quick Connect	270.42	
		For >6 Months (>26 Weeks), Deduct	*-10.82*	
01 22 23 00-1525	DAY	10" Diameter Wye For HDPE Pipe, Quick Connect	52.91	
		For Half Day Usage, Deduct	*-16.53*	
01 22 23 00-1526	WK	10" Diameter Wye For HDPE Pipe, Quick Connect	135.21	
01 22 23 00-1527	MO	10" Diameter Wye For HDPE Pipe, Quick Connect	411.50	
		For >6 Months (>26 Weeks), Deduct	*-16.46*	
01 22 23 00-1528	DAY	12" Diameter Wye For HDPE Pipe, Quick Connect	52.91	
		For Half Day Usage, Deduct	*-16.53*	
01 22 23 00-1529	WK	12" Diameter Wye For HDPE Pipe, Quick Connect	135.21	
01 22 23 00-1530	MO	12" Diameter Wye For HDPE Pipe, Quick Connect	411.50	
		For >6 Months (>26 Weeks), Deduct	*-16.46*	

01 22 23 00-1531 Temporary Building Services *(01 22 23)*

01 22 23 00-1532 Boilers *(01 22 23 00-1531)*

Note: Excludes operator, delivery, set-up, and removal.

01 22 23 00-1533 Electric Boilers *(01 22 23 00-1532)*

01 22 23 00-1534	MO	40 MBH, 12 KW Electric Boiler Rental	2,882.75
01 22 23 00-1535	MO	60 MBH, 20 KW Electric Boiler Rental	3,144.86
01 22 23 00-1536	MO	95 MBH, 30 KW Electric Boiler Rental	3,275.92
01 22 23 00-1537	MO	135 MBH, 40 KW Electric Boiler Rental	3,668.96
01 22 23 00-1538	MO	165 MBH, 50 KW Electric Boiler Rental	5,110.33
01 22 23 00-1539	MO	215 MBH, 60 KW Electric Boiler Rental	5,896.56
01 22 23 00-1540	MO	365 MBH, 100 KW Electric Boiler Rental	7,731.10
01 22 23 00-1541	MO	510 MBH, 150 KW Electric Boiler Rental	9,434.58

01 22 23 00-1542 Oil Fired Hot Water Boilers *(01 22 23 00-1532)*

01 22 23 00-1543	MO	500 MBH, 15 HP, Oil Fired Hot Water Boiler Rental	2,536.21
01 22 23 00-1544	MO	1,000 MBH, 30 HP, Oil Fired Hot Water Boiler Rental	3,099.15
01 22 23 00-1545	MO	1,500 MBH, 45 HP, Oil Fired Hot Water Boiler Rental	3,663.41
01 22 23 00-1546	MO	2,000 MBH, 60 HP, Oil Fired Hot Water Boiler Rental	4,227.03
01 22 23 00-1547	MO	2,500 MBH, 75 HP, Oil Fired Hot Water Boiler Rental	4,790.64
01 22 23 00-1548	MO	3,000 MBH, 90 HP, Oil Fired Hot Water Boiler Rental	5,354.22

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-1549	MO	3,500 MBH, 105 HP, Oil Fired Hot Water Boiler Rental	6,763.23	
01 22 23 00-1550	MO	4,000 MBH, 120 HP, Oil Fired Hot Water Boiler Rental	7,890.44	
01 22 23 00-1551	MO	4,500 MBH, 135 HP, Oil Fired Hot Water Boiler Rental	7,980.11	
01 22 23 00-1552	MO	5,000 MBH, 150 HP, Oil Fired Hot Water Boiler Rental	8,069.77	
01 22 23 00-1553	MO	5,500 MBH, 165 HP, Oil Fired Hot Water Boiler Rental	8,454.04	
01 22 23 00-1554	MO	6,000 MBH, 180 HP, Oil Fired Hot Water Boiler Rental	8,966.40	
01 22 23 00-1555	MO	6,500 MBH, 195 HP, Oil Fired Hot Water Boiler Rental	9,478.77	
01 22 23 00-1556	MO	7,000 MBH, 210 HP, Oil Fired Hot Water Boiler Rental	9,991.14	
01 22 23 00-1557	MO	7,500 MBH, 225 HP, Oil Fired Hot Water Boiler Rental	10,503.51	
01 22 23 00-1558	MO	8,000 MBH, 240 HP, Oil Fired Hot Water Boiler Rental	11,015.87	
01 22 23 00-1559	MO	8,500 MBH, 255 HP, Oil Fired Hot Water Boiler Rental	11,528.24	
01 22 23 00-1560	MO	9,000 MBH, 270 HP, Oil Fired Hot Water Boiler Rental	12,040.61	
01 22 23 00-1561	MO	9,500 MBH, 285 HP, Oil Fired Hot Water Boiler Rental	12,552.97	
01 22 23 00-1562	MO	10,000 MBH, 300 HP, Oil Fired Hot Water Boiler Rental	13,065.34	
01 22 23 00-1563	MO	10,500 MBH, 315 HP, Oil Fired Hot Water Boiler Rental	13,577.71	
01 22 23 00-1564	MO	11,000 MBH, 330 HP, Oil Fired Hot Water Boiler Rental	14,090.08	
01 22 23 00-1565	MO	11,500 MBH, 345 HP, Oil Fired Hot Water Boiler Rental	14,602.44	
01 22 23 00-1566	MO	12,000 MBH, 360 HP, Oil Fired Hot Water Boiler Rental	15,114.81	
01 22 23 00-1567	MO	12,500 MBH, 375 HP, Oil Fired Hot Water Boiler Rental	15,627.18	
01 22 23 00-1568	MO	13,000 MBH, 390 HP, Oil Fired Hot Water Boiler Rental	16,139.54	
01 22 23 00-1569	MO	13,500 MBH, 405 HP, Oil Fired Hot Water Boiler Rental	16,651.90	
01 22 23 00-1570	MO	14,000 MBH, 420 HP, Oil Fired Hot Water Boiler Rental	17,164.26	
01 22 23 00-1571	MO	14,500 MBH, 435 HP, Oil Fired Hot Water Boiler Rental	17,676.63	
01 22 23 00-1572	MO	15,000 MBH, 450 HP, Oil Fired Hot Water Boiler Rental	18,189.00	
01 22 23 00-1573	MO	15,500 MBH, 465 HP, Oil Fired Hot Water Boiler Rental	18,701.37	
01 22 23 00-1574	MO	16,000 MBH, 480 HP, Oil Fired Hot Water Boiler Rental	19,213.73	
01 22 23 00-1575	MO	16,500 MBH, 495 HP, Oil Fired Hot Water Boiler Rental	19,726.10	
01 22 23 00-1576	MO	17,000 MBH, 510 HP, Oil Fired Hot Water Boiler Rental	20,238.47	

01 22 23 00-1577 Boilers Set-up *(01 22 23 00-1532)*

01 22 23 00-1578	EA	Set-up Charge For Rental Boiler Note: Includes delivery, setup, installation, startup, commissioning, decommissioning, and pickup. Excludes piping and electrical hookup. Excludes crane.	8,211.48	

01 22 23 00-1579 Chillers *(01 22 23 00-1531)*

Note: Excludes operator, delivery, set-up, and removal.

01 22 23 00-1580 Air-Cooled Chillers *(01 22 23 00-1579)*

01 22 23 00-1581	MO	25 Ton Air-Cooled Chiller Rental	2,552.14	
		For >3 To 6 Month Rental, Deduct	*-382.82*	
		For >6 Months (>26 Weeks), Deduct	*-638.04*	
01 22 23 00-1582	MO	40 Ton Air-Cooled Chiller Rental	4,083.43	
		For >3 To 6 Month Rental, Deduct	*-612.51*	
		For >6 Months (>26 Weeks), Deduct	*-1,020.86*	
01 22 23 00-1583	MO	60 Ton Air-Cooled Chiller Rental	4,994.49	
		For >3 To 6 Month Rental, Deduct	*-749.17*	
		For >6 Months (>26 Weeks), Deduct	*-1,248.62*	
01 22 23 00-1584	MO	80 Ton Air-Cooled Chiller Rental	5,905.56	
		For >3 To 6 Month Rental, Deduct	*-885.83*	
		For >6 Months (>26 Weeks), Deduct	*-1,476.39*	
01 22 23 00-1585	MO	100 Ton Air-Cooled Chiller Rental	6,816.62	
		For >3 To 6 Month Rental, Deduct	*-1,022.49*	
		For >6 Months (>26 Weeks), Deduct	*-1,704.16*	
01 22 23 00-1586	MO	125 Ton Air-Cooled Chiller Rental	7,897.19	
		For >3 To 6 Month Rental, Deduct	*-1,184.58*	
		For >6 Months (>26 Weeks), Deduct	*-1,974.30*	
01 22 23 00-1587	MO	155 Ton Air-Cooled Chiller Rental	9,553.67	
		For >3 To 6 Month Rental, Deduct	*-1,433.05*	
		For >6 Months (>26 Weeks), Deduct	*-2,388.42*	
01 22 23 00-1588	MO	170 Ton Air-Cooled Chiller Rental	10,216.26	
		For >3 To 6 Month Rental, Deduct	*-1,532.44*	
		For >6 Months (>26 Weeks), Deduct	*-2,554.07*	
01 22 23 00-1589	MO	200 Ton Air-Cooled Chiller Rental	11,735.99	
		For >3 To 6 Month Rental, Deduct	*-1,760.40*	
		For >6 Months (>26 Weeks), Deduct	*-2,934.00*	
01 22 23 00-1590	MO	250 Ton Air-Cooled Chiller Rental	13,964.54	
		For >3 To 6 Month Rental, Deduct	*-2,094.68*	
		For >6 Months (>26 Weeks), Deduct	*-3,491.14*	
01 22 23 00-1591	MO	300 Ton Air-Cooled Chiller Rental Note: Includes trailer.	16,295.18	
		For >3 To 6 Month Rental, Deduct	*-2,444.28*	
		For >6 Months (>26 Weeks), Deduct	*-4,073.80*	
01 22 23 00-1592	MO	400 Ton Air-Cooled Chiller Rental Note: Includes trailer, pump and 200' of 6" hose.	21,495.77	
		For >3 To 6 Month Rental, Deduct	*-3,224.37*	
		For >6 Months (>26 Weeks), Deduct	*-5,373.94*	
01 22 23 00-1593	MO	500 Ton Air-Cooled Chiller Rental Note: Includes trailer, pump and 200' of 6" hose.	26,607.75	
		For >3 To 6 Month Rental, Deduct	*-3,991.16*	
		For >6 Months (>26 Weeks), Deduct	*-6,651.94*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-1594	EA	Set-up Charge For Air-Cooled Chiller Rental Unit Note: Includes delivery, setup, installation, refrigerant charge, startup, commissioning, decommissioning, recovery of refrigerant and pickup. Excludes piping and electrical hookup. Excludes crane if off-loaded.	5,707.98	

01 22 23 00-1595 Chiller Rental Accessories *(01 22 23 00-1579)*

01 22 23 00-1596	MO	4" x 25' Flexible Water Hose For Chiller Rental	45.48	
01 22 23 00-1597	MO	6" x 25' Flexible Water Hose For Chiller Rental	56.84	

01 22 23 00-1598 Cooling Tower *(01 22 23 00-1531)*

Note: Excludes operator, delivery, set-up, and removal.

01 22 23 00-1599	MO	100 Ton Cooling Tower Rental	3,702.23	
		For >3 To 6 Months Rental, Deduct	*-555.33*	
		For >6 Months (>26 Weeks), Deduct	*-925.56*	
01 22 23 00-1600	MO	200 Ton Cooling Tower Rental	6,739.50	
		For >3 To 6 Months Rental, Deduct	*-1,010.93*	
		For >6 Months (>26 Weeks), Deduct	*-1,684.88*	
01 22 23 00-1601	MO	250 Ton Cooling Tower Rental	7,632.17	
		For >3 To 6 Months Rental, Deduct	*-1,144.83*	
		For >6 Months (>26 Weeks), Deduct	*-1,908.04*	
01 22 23 00-1602	MO	300 Ton Cooling Tower Rental	8,626.56	
		For >3 To 6 Months Rental, Deduct	*-1,293.98*	
		For >6 Months (>26 Weeks), Deduct	*-2,156.64*	
01 22 23 00-1603	MO	400 Ton Cooling Tower Rental	10,783.20	
		For >3 To 6 Months Rental, Deduct	*-1,617.48*	
		For >6 Months (>26 Weeks), Deduct	*-2,695.80*	
01 22 23 00-1604	MO	500 Ton Cooling Tower Rental	12,607.41	
		For >3 To 6 Months Rental, Deduct	*-1,891.11*	
		For >6 Months (>26 Weeks), Deduct	*-3,151.85*	
01 22 23 00-1605	MO	Set-up Charge For Rental Cooling Tower Note: Includes delivery, setup, installation, startup, commissioning, decommissioning, and pickup. Excludes piping and electrical hookup. Excludes crane.	5,707.98	

01 22 23 00-1606 Emergency Cooler/Freezer *(01 22 23 00-1531)*

Note: Excludes utility connection, delivery, set-up, and removal. Cooler 115 Volt or 230 Volt, freezer 208/230 Volt, combo 115 Volt or 230 Volt.

01 22 23 00-1607	DAY	8 x 6 x 7 Emergency Cooler Rental	151.76	
		For Half Day Usage, Deduct	*-47.43*	
01 22 23 00-1608	WK	8 x 6 x 7 Emergency Cooler Rental	809.40	
01 22 23 00-1609	DAY	10 x 7 x 7 Emergency Cooler Rental	303.52	
		For Half Day Usage, Deduct	*-94.85*	
01 22 23 00-1610	WK	10 x 7 x 7 Emergency Cooler Rental	1,214.10	
01 22 23 00-1611	MO	10 x 7 x 7 Emergency Cooler Rental	3,035.25	
01 22 23 00-1612	DAY	10 x 7 x 7 Emergency Freezer Rental	354.11	
		For Half Day Usage, Deduct	*-110.66*	
01 22 23 00-1613	WK	10 x 7 x 7 Emergency Freezer Rental	1,416.45	
01 22 23 00-1614	MO	10 x 7 x 7 Emergency Freezer Rental	3,642.30	
01 22 23 00-1615	DAY	6 x 8 x 7 Or 6 x 6 x 7, Emergency Combo Cooler/Freezer Rental	404.70	
		For Half Day Usage, Deduct	*-126.47*	
01 22 23 00-1616	WK	6 x 8 x 7 Or 6 x 6 x 7, Emergency Combo Cooler/Freezer Rental	1,618.80	
01 22 23 00-1617	MO	6 x 8 x 7 Or 6 x 6 x 7, Emergency Combo Cooler/Freezer Rental	4,047.00	

01 22 23 00-1618 Portable Spot Cooling Units *(01 22 23 00-1531)*

Note: Includes up to 20' duct. Excludes operator, delivery, set-up, and removal.

01 22 23 00-1619	DAY	1 Ton Portable Spot Cooling Unit	147.20	
		For Half Day Usage, Deduct	*-46.00*	
01 22 23 00-1620	WK	1 Ton Portable Spot Cooling Unit	318.94	
01 22 23 00-1621	MO	1 Ton Portable Spot Cooling Unit	753.94	
		For >6 Months (>26 Weeks), Deduct	*-30.16*	
01 22 23 00-1622	DAY	1.5 Ton Portable Spot Cooling Unit	192.49	
		For Half Day Usage, Deduct	*-60.15*	
01 22 23 00-1623	WK	1.5 Ton Portable Spot Cooling Unit	395.37	
01 22 23 00-1624	MO	1.5 Ton Portable Spot Cooling Unit	927.56	
		For >6 Months (>26 Weeks), Deduct	*-37.10*	
01 22 23 00-1625	DAY	2 Ton Portable Spot Cooling Unit	259.49	
		For Half Day Usage, Deduct	*-81.09*	
01 22 23 00-1626	WK	2 Ton Portable Spot Cooling Unit	542.57	
01 22 23 00-1627	MO	2 Ton Portable Spot Cooling Unit	1,004.93	
		For >6 Months (>26 Weeks), Deduct	*-40.20*	
01 22 23 00-1628	DAY	3 Ton Portable Spot Cooling Unit	271.76	
		For Half Day Usage, Deduct	*-84.93*	
01 22 23 00-1629	WK	3 Ton Portable Spot Cooling Unit	575.60	
01 22 23 00-1630	MO	3 Ton Portable Spot Cooling Unit	1,271.97	
		For >6 Months (>26 Weeks), Deduct	*-50.88*	
01 22 23 00-1631	DAY	5 Ton Portable Spot Cooling Unit	424.62	
		For Half Day Usage, Deduct	*-132.69*	
01 22 23 00-1632	WK	5 Ton Portable Spot Cooling Unit	858.68	
01 22 23 00-1633	MO	5 Ton Portable Spot Cooling Unit	1,784.35	
		For >6 Months (>26 Weeks), Deduct	*-71.37*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-1634	DAY	10 To 12 Ton Portable Spot Cooling Unit	554.84	
		For Half Day Usage, Deduct	*-173.39*	
01 22 23 00-1635	WK	10 To 12 Ton Portable Spot Cooling Unit	1,250.27	
01 22 23 00-1636	MO	10 To 12 Ton Portable Spot Cooling Unit	3,017.63	
		For >6 Months (>26 Weeks), Deduct	*-120.71*	
01 22 23 00-1637	DAY	20 Ton Portable Spot Cooling Unit	636.93	
		For Half Day Usage, Deduct	*-199.04*	
01 22 23 00-1638	WK	20 Ton Portable Spot Cooling Unit	1,462.58	
01 22 23 00-1639	MO	20 Ton Portable Spot Cooling Unit	4,076.35	
		For >6 Months (>26 Weeks), Deduct	*-163.05*	
01 22 23 00-1640	DAY	25 Ton Portable Spot Cooling Unit	905.86	
		For Half Day Usage, Deduct	*-283.08*	
01 22 23 00-1641	WK	25 Ton Portable Spot Cooling Unit	1,835.30	
01 22 23 00-1642	MO	25 Ton Portable Spot Cooling Unit	4,269.79	
		For >6 Months (>26 Weeks), Deduct	*-170.79*	
01 22 23 00-1643	EA	Set-up Charge For Rental Of Up To 5 Ton Portable Spot Cooler Note: Includes delivery, setup, connection to power outlet and conncection to duct and removal. Excludes electrical wiring.	274.20	
01 22 23 00-1644	EA	Set-up Charge For Rental Of 10 To 15 Ton Portable Spot Cooler Note: Includes delivery, setup, connection to power outlet and conncection to duct and removal. Excludes electrical wiring.	630.78	
01 22 23 00-1645	EA	Set-up Charge For Rental Of 20 To 25 Ton Portable Spot Cooler Note: Includes delivery, setup, connection to power outlet and conncection to duct and removal. Excludes electrical wiring.	931.54	
01 22 23 00-1646		**Fuel Oil Tank** *(01 22 23 00-1531)* Note: Excludes delivery to job site and pick-up when complete. Excludes 0ff-road fuel costs. See CSI section 01 22 23 00-0890 for reimbursable fuel fees.		
01 22 23 00-1647	MO	100 Gallon Portable Double Wall Fuel Oil Tank Rental	396.94	
		For >6 Months (>26 Weeks), Deduct	*-15.88*	
01 22 23 00-1648	MO	275 Gallon Portable Double Wall Fuel Oil Tank Rental	617.46	
		For >6 Months (>26 Weeks), Deduct	*-24.70*	
01 22 23 00-1649	MO	500 Gallon Portable Double Wall Fuel Oil Tank Rental	1,543.66	
		For >6 Months (>26 Weeks), Deduct	*-61.75*	
01 22 23 00-1650	MO	1,000 Gallon Portable Double Wall Fuel Oil Tank Rental	2,572.76	
		For >6 Months (>26 Weeks), Deduct	*-102.91*	
01 22 23 00-1651	MO	2,300 Gallon Portable Double Wall Fuel Oil Tank Rental	3,396.05	
		For >6 Months (>26 Weeks), Deduct	*-135.84*	
01 22 23 00-1652	MO	5,000 Gallon Portable Double Wall Fuel Oil Tank Rental	6,066.82	
		For >6 Months (>26 Weeks), Deduct	*-242.67*	
01 22 23 00-1653		**Air Handling Unit (AHU)** *(01 22 23 00-1531)* Note: Excludes operator, delivery, set-up, and removal.		
01 22 23 00-1654		**Air Handling Unit (AHU)** *(01 22 23 00-1653)*		
01 22 23 00-1655	MO	5,000 CFM Air Handling Unit Rental	3,166.02	
		For >6 Months (>26 Weeks), Deduct	*-126.64*	
01 22 23 00-1656	MO	10,000 CFM Air Handling Unit Rental	3,273.75	
		For >6 Months (>26 Weeks), Deduct	*-130.95*	
01 22 23 00-1657	MO	25,000 CFM Air Handling Unit Rental	5,379.84	
		For >6 Months (>26 Weeks), Deduct	*-215.19*	
01 22 23 00-1658		**Air Handling Unit Set-up** *(01 22 23 00-1653)*		
01 22 23 00-1659	EA	Set-up Charge For Rental Air Handling Unit Note: Includes delivery, setup, installation, startup, commissioning, decommissioning, and pickup. Excludes piping and electrical hookup. Excludes crane.	1,117.61	
01 22 23 00-1660	MO	12" x 100' Flex Duct For AHU Rental Note: Includes four (4) 25' sections.	309.83	
01 22 23 00-1661	MO	20" x 100' Flex Duct For AHU Rental Note: Includes four (4) 25' sections.	374.64	
01 22 23 00-1662		**Truck And Trailer Equipment** *(01 22 23)*		
01 22 23 00-1663		**Trucks** *(01 22 23 00-1662)* Note: Includes driver, delivery to job site and pick-up when complete.		
01 22 23 00-1664		**Flat Bed Trucks** *(01 22 23 00-1663)* Note: Includes hydraulic tilt bed.		
01 22 23 00-1665	DAY	1-1/2 Ton Capacity, 8' To 10' Bed, 4 x 2 Flat Bed Truck With Full-Time Truck Driver	1,097.73	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-494.23*	
01 22 23 00-1666	WK	1-1/2 Ton Capacity, 8' To 10' Bed, 4 x 2 Flat Bed Truck With Full-Time Truck Driver	4,795.59	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-1667	MO	1-1/2 Ton Capacity, 8' To 10' Bed, 4 x 2 Flat Bed Truck With Full-Time Truck Driver	19,399.98	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-77.18*	
01 22 23 00-1668	DAY	3 Ton Capacity, 12' To 16' Bed, 4 x 2 Flat Bed Truck With Full-Time Truck Driver	1,223.75	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-533.61*	
01 22 23 00-1669	WK	3 Ton Capacity, 12' To 16' Bed, 4 x 2 Flat Bed Truck With Full-Time Truck Driver	5,118.51	
		For Equipment Without Operator, Deduct	*-4,031.62*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-1670	MO	3 Ton Capacity, 12' To 16' Bed, 4 x 2 Flat Bed Truck With Full-Time Truck Driver	20,226.96	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-110.26*	
01 22 23 00-1671	DAY	6-1/2 Ton Capacity, 16' To 22' Bed, 4 x 2 Flat Bed Truck With Full-Time Truck Driver	1,314.16	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-561.86*	
01 22 23 00-1672	WK	6-1/2 Ton Capacity, 16' To 22' Bed, 4 x 2 Flat Bed Truck With Full-Time Truck Driver	5,464.11	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-1673	MO	6-1/2 Ton Capacity, 16' To 22' Bed, 4 x 2 Flat Bed Truck With Full-Time Truck Driver	21,542.25	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-162.88*	

01 22 23 00-1674 Boom Trucks *(01 22 23 00-1663)*

01 22 23 00-1675	DAY	3-1/2 Ton, 4 x 2 Boom Truck With Full-Time Truck Driver	1,348.98	
		For Equipment Without Operator, Deduct	*-806.32*	
		For High Rail Equipment, Add	*189.93*	
		For Half Day Usage, Deduct	*-572.74*	
01 22 23 00-1676	WK	3-1/2 Ton, 4 x 2 Boom Truck With Full-Time Truck Driver	5,444.57	
		For Equipment Without Operator, Deduct	*-4,031.62*	
		For High Rail Equipment, Add	*494.53*	
01 22 23 00-1677	MO	3-1/2 Ton, 4 x 2 Boom Truck With Full-Time Truck Driver	21,053.94	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For High Rail Equipment, Add	*1,254.25*	
		For >6 Months (>26 Weeks), Deduct	*-143.34*	

01 22 23 00-1678 Light Off-Road Utility Passanger Vehicles *(01 22 23 00-1663)*

01 22 23 00-1679	DAY	4 Wheel, 2 Person, Light Off Road Utility Passanger Vehicle	317.74	
		For Half Day Usage, Deduct	*-99.29*	
01 22 23 00-1680	WK	4 Wheel, 2 Person, Light Off Road Utility Passanger Vehicle	734.78	
01 22 23 00-1681	MO	4 Wheel, 2 Person, Light Off Road Utility Passanger Vehicle	1,588.72	
		For >6 Months (>26 Weeks), Deduct	*-63.55*	
01 22 23 00-1682	DAY	4 Wheel, 4 Person, Light Off Road Utility Passanger Vehicle	327.67	
		For Half Day Usage, Deduct	*-102.40*	
01 22 23 00-1683	WK	4 Wheel, 4 Person, Light Off Road Utility Passanger Vehicle	764.57	
01 22 23 00-1684	MO	4 Wheel, 4 Person, Light Off Road Utility Passanger Vehicle	1,688.02	
		For >6 Months (>26 Weeks), Deduct	*-67.52*	

01 22 23 00-1685 Light And Heavy Duty Trucks *(01 22 23 00-1663)*

01 22 23 00-1686	DAY	1/2 To 3/4 Ton, 4 x 2 Light Duty Conventional Pickup Truck With Full-Time Truck Driver	1,046.28	
		For Equipment Without Operator, Deduct	*-799.14*	
		For Half Day Usage, Deduct	*-476.80*	
01 22 23 00-1687	WK	1/2 To 3/4 Ton, 4 x 2 Light Duty Conventional Pickup Truck With Full-Time Truck Driver	4,806.60	
		For Equipment Without Operator, Deduct	*-3,995.68*	
01 22 23 00-1688	MO	1/2 To 3/4 Ton, 4 x 2 Light Duty Conventional Pickup Truck With Full-Time Truck Driver	19,013.68	
		For Equipment Without Operator, Deduct	*-17,314.62*	
		For >6 Months (>26 Weeks), Deduct	*-67.96*	
01 22 23 00-1689	DAY	3/4 Ton, 4 x 4 Heavy Duty Crew Cab Pickup Truck With Full-Time Truck Driver	1,092.61	
		For Equipment Without Operator, Deduct	*-799.14*	
		For Half Day Usage, Deduct	*-491.28*	
01 22 23 00-1690	WK	3/4 Ton, 4 x 4 Heavy Duty Crew Cab Pickup Truck With Full-Time Truck Driver	4,945.61	
		For Equipment Without Operator, Deduct	*-3,995.68*	
01 22 23 00-1691	MO	3/4 Ton, 4 x 4 Heavy Duty Crew Cab Pickup Truck With Full-Time Truck Driver	19,322.60	
		For Equipment Without Operator, Deduct	*-17,314.62*	
		For >6 Months (>26 Weeks), Deduct	*-80.32*	

01 22 23 00-1692 Rear Dump Trucks *(01 22 23 00-1663)*

01 22 23 00-1693	DAY	2.5 CY Rear Dump Truck With Full-Time Truck Driver	1,165.21	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-515.31*	
01 22 23 00-1694	WK	2.5 CY Rear Dump Truck With Full-Time Truck Driver	4,979.56	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-1695	MO	2.5 CY Rear Dump Truck With Full-Time Truck Driver	20,372.70	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-116.09*	
01 22 23 00-1696	DAY	3 To 4 CY Rear Dump Truck With Full-Time Truck Driver	1,284.19	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-552.49*	
01 22 23 00-1697	WK	3 To 4 CY Rear Dump Truck With Full-Time Truck Driver	5,348.21	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-1698	MO	3 To 4 CY Rear Dump Truck With Full-Time Truck Driver	20,883.74	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-136.54*	
01 22 23 00-1699	DAY	5 To 6 CY Rear Dump Truck With Full-Time Truck Driver	1,352.46	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-573.83*	
01 22 23 00-1700	WK	5 To 6 CY Rear Dump Truck With Full-Time Truck Driver	5,494.50	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-1701	MO	5 To 6 CY Rear Dump Truck With Full-Time Truck Driver	20,981.26	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-140.44*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-1702	DAY	12 To 14 CY Rear Dump Truck With Full-Time Truck Driver	2,161.92	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-826.79*	
01 22 23 00-1703	WK	12 To 14 CY Rear Dump Truck With Full-Time Truck Driver	7,162.17	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-1704	MO	12 To 14 CY Rear Dump Truck With Full-Time Truck Driver	25,662.46	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-327.68*	
01 22 23 00-1705	DAY	18 CY Rear Dump Truck With Full-Time Truck Driver	2,297.48	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-869.15*	
01 22 23 00-1706	WK	18 CY Rear Dump Truck With Full-Time Truck Driver	7,475.23	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-1707	MO	18 CY Rear Dump Truck With Full-Time Truck Driver	26,481.67	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-360.45*	

01 22 23 00-1708 Tractor-Trailer Trucks *(01 22 23 00-1663)*

01 22 23 00-1709	DAY	Tractor, Truck, Diesel Powered, 4x2, 35,000 GVW, 329 HP, With Full Time Truck Driver	1,670.84	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-673.32*	
01 22 23 00-1710	WK	Tractor, Truck, Diesel Powered, 4x2, 35,000 GVW, 329 HP, With Full Time Truck Driver	7,489.73	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-1711	MO	Tractor, Truck, Diesel Powered, 4x2, 35,000 GVW, 329 HP, With Full Time Truck Driver	29,828.50	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-494.33*	
01 22 23 00-1712	DAY	Tractor, Truck, Diesel Powered, 6x4, 75,000 GVW, 400 HP, With Full Time Truck Driver	1,948.64	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-760.14*	
01 22 23 00-1713	WK	Tractor, Truck, Diesel Powered, 6x4, 75,000 GVW, 400 HP, With Full Time Truck Driver	8,600.93	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-1714	MO	Tractor, Truck, Diesel Powered, 6x4, 75,000 GVW, 400 HP, With Full Time Truck Driver	33,783.41	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-652.52*	

01 22 23 00-1715 Under-Bridge Inspection Trucks *(01 22 23 00-1663)*

01 22 23 00-1716	DAY	40' Reach Under Bridge Inspection Truck (UBIT) With Full-Time Truck Driver	4,854.68	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-1,668.27*	
01 22 23 00-1717	WK	40' Reach Under Bridge Inspection Truck (UBIT) With Full-Time Truck Driver	22,085.10	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-1718	MO	40' Reach Under Bridge Inspection Truck (UBIT) With Full-Time Truck Driver	81,466.50	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-2,559.85*	
01 22 23 00-1719	DAY	50' Reach Under Bridge Inspection Truck (UBIT) With Full-Time Truck Driver	5,401.75	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-1,839.23*	
01 22 23 00-1720	WK	50' Reach Under Bridge Inspection Truck (UBIT) With Full-Time Truck Driver	23,179.24	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-1721	MO	50' Reach Under Bridge Inspection Truck (UBIT) With Full-Time Truck Driver	85,595.29	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-2,725.00*	
01 22 23 00-1722	DAY	60' Reach Under Bridge Inspection Truck (UBIT) With Full-Time Truck Driver	5,730.00	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-1,941.81*	
01 22 23 00-1723	WK	60' Reach Under Bridge Inspection Truck (UBIT) With Full-Time Truck Driver	24,820.47	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-1724	MO	60' Reach Under Bridge Inspection Truck (UBIT) With Full-Time Truck Driver	89,724.08	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-2,890.15*	
01 22 23 00-1725	DAY	75' Reach Under Bridge Inspection Truck (UBIT) With Full-Time Truck Driver	7,152.39	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-2,386.31*	
01 22 23 00-1726	WK	75' Reach Under Bridge Inspection Truck (UBIT) With Full-Time Truck Driver	31,385.37	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-1727	MO	75' Reach Under Bridge Inspection Truck (UBIT) With Full-Time Truck Driver	110,367.99	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-3,715.91*	

01 22 23 00-1728 Vacuum Trucks *(01 22 23 00-1663)*

01 22 23 00-1729	DAY	1,500 To 2,000 Gallon Vacuum Truck With Full-Time Truck Driver	1,172.45	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-517.58*	
01 22 23 00-1730	WK	1,500 To 2,000 Gallon Vacuum Truck With Full-Time Truck Driver	5,122.83	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-1731	MO	1,500 To 2,000 Gallon Vacuum Truck With Full-Time Truck Driver	20,693.73	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-128.93*	
01 22 23 00-1732	DAY	5,000 Gallon Vacuum Truck With Full-Time Truck Driver	2,152.16	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-823.74*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-1733	WK	5,000 Gallon Vacuum Truck With Full-Time Truck Driver	8,084.76	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-1734	MO	5,000 Gallon Vacuum Truck With Full-Time Truck Driver	29,430.83	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-478.42*	

01 22 23 00-1735 Water Trucks *(01 22 23 00-1663)*

Note: Includes pump and 1-1/2" Diameter x 50' water hose. See CSI section 01 22 23 00-1421 for additional discharge hose, 01 22 23 00-1795 for water trailer, 31 23 23 23-0001 for compaction water as required for earth/aggregate backfill.

01 22 23 00-1736	DAY	2,000 Gallon Water Truck With Full-Time Driver	1,452.43	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Each 1,000 Gallon Of Purchased Water, Add	*15.32*	
		For Half Day Usage, Deduct	*-605.07*	
01 22 23 00-1737	WK	2,000 Gallon Water Truck With Full-Time Driver	5,733.04	
		For Equipment Without Operator, Deduct	*-4,031.62*	
		For Each 1,000 Gallon Of Purchased Water, Add	*15.32*	
01 22 23 00-1738	MO	2,000 Gallon Water Truck With Full-Time Driver	21,490.60	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For Each 1,000 Gallon Of Purchased Water, Add	*15.32*	
		For >6 Months (>26 Weeks), Deduct	*-160.81*	
01 22 23 00-1739	DAY	3,700 To 4,000 Gallon Water Truck With Full-Time Truck Driver	1,768.31	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Each 1,000 Gallon Of Purchased Water, Add	*15.32*	
		For Half Day Usage, Deduct	*-703.78*	
01 22 23 00-1740	WK	3,700 To 4,000 Gallon Water Truck With Full-Time Truck Driver	6,680.67	
		For Equipment Without Operator, Deduct	*-4,031.62*	
		For Each 1,000 Gallon Of Purchased Water, Add	*15.32*	
01 22 23 00-1741	MO	3,700 To 4,000 Gallon Water Truck With Full-Time Truck Driver	23,931.46	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For Each 1,000 Gallon Of Purchased Water, Add	*15.32*	
		For >6 Months (>26 Weeks), Deduct	*-258.44*	

01 22 23 00-1742 Asphalt Distribution Trucks *(01 22 23 00-1663)*

01 22 23 00-1743	DAY	3,000 Gallon Asphalt Prime Coat Distribution Truck With Full-Time Truck Driver	2,156.27	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-825.02*	
01 22 23 00-1744	WK	3,000 Gallon Asphalt Prime Coat Distribution Truck With Full-Time Truck Driver	8,064.13	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-1745	MO	3,000 Gallon Asphalt Prime Coat Distribution Truck With Full-Time Truck Driver	29,391.47	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-476.84*	

01 22 23 00-1746 Traffic Control Truck With Mounted Impact Attenuators/Crash Cushions And Arrow Board *(01 22 23 00-1663)*

01 22 23 00-1747	DAY	Traffic Control Truck With Mounted Impact Attenuator/Crash Cushion And Arrow Board With Full-Time Truck Driver	1,544.55	
		For Equipment Without Operator, Deduct	*-799.14*	
		For Half Day Usage, Deduct	*-632.51*	
01 22 23 00-1748	WK	Traffic Control Truck With Mounted Impact Attenuator/Crash Cushion And Arrow Board With Full-Time Truck Driver	6,195.60	
		For Equipment Without Operator, Deduct	*-3,995.68*	
01 22 23 00-1749	MO	Traffic Control Truck With Mounted Impact Attenuator/Crash Cushion And Arrow Board With Full-Time Truck Driver	22,657.05	
		For Equipment Without Operator, Deduct	*-17,314.62*	
		For >6 Months (>26 Weeks), Deduct	*-213.70*	

01 22 23 00-1750 Truck Mounted Scissor Platform Lifts *(01 22 23 00-1663)*

01 22 23 00-1751	DAY	14' Truck-Mounted Platform Lift With Full-Time Truck Driver	2,994.62	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-1,087.00*	
01 22 23 00-1752	WK	14' Truck-Mounted Platform Lift With Full-Time Truck Driver	9,502.37	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-1753	MO	14' Truck-Mounted Platform Lift With Full-Time Truck Driver	32,788.46	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-612.72*	

01 22 23 00-1754 Vacuum Sweeper Trucks For Bridge Decks *(01 22 23 00-1663)*

01 22 23 00-1755	DAY	Vacuum Sweeper Truck, With Full-Time Truck Driver	2,152.16	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-823.74*	
01 22 23 00-1756	WK	Vacuum Sweeper Truck, With Full-Time Truck Driver	8,084.76	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-1757	MO	Vacuum Sweeper Truck, With Full-Time Truck Driver	29,430.83	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-478.42*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-1758		**Combination Jet/Vacuum Trucks** *(01 22 23 00-1663)*		
01 22 23 00-1759	DAY	500 Gallon Water, 6 CY Debris, Combination Jet/Vacuum Truck With Full-Time Truck Driver	3,414.77	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-1,218.30*	
01 22 23 00-1760	WK	500 Gallon Water, 6 CY Debris, Combination Jet/Vacuum Truck With Full-Time Truck Driver	16,242.33	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-1761	DAY	1,000 Gallon Water, 10 CY Debris, Combination Jet/Vacuum Truck With Full-Time Truck Driver	3,869.94	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-1,360.54*	
01 22 23 00-1762	WK	1,000 Gallon Water, 10 CY Debris, Combination Jet/Vacuum Truck With Full-Time Truck Driver	18,890.18	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-1763	DAY	2,000 Gallon Water, 15 CY Debris, Combination Jet/Vacuum Truck With Full-Time Truck Driver	4,307.60	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-1,497.31*	
01 22 23 00-1764	WK	2,000 Gallon Water, 15 CY Debris, Combination Jet/Vacuum Truck With Full-Time Truck Driver	21,538.02	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-1765		**Straight/Box Trucks** *(01 22 23 00-1663)*		
01 22 23 00-1766	DAY	18,000 Lb. Capacity, 24' Straight/Box Truck With Full-Time Truck Driver Note: Includes 2,500 Lb. lift gate.	930.76	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-442.05*	
01 22 23 00-1767	WK	18,000 Lb. Capacity, 24' Straight/Box Truck With Full-Time Truck Driver Note: Includes 2,500 Lb. lift gate.	4,653.82	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-1768	MO	18,000 Lb. Capacity, 24' Straight/Box Truck With Full-Time Truck Driver Note: Includes 2,500 Lb. lift gate.	19,307.04	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-73.47*	
01 22 23 00-1769		**Truck Mounted Under-Bridge Aerial Access** *(01 22 23 00-1663)*		
01 22 23 00-1770	DAY	Truck Mounted Under-Bridge Aerial Access, 29.7' Horizontal, 21.5' Vertical, 990 Lb. Capacity At 35' With Full-Time Truck Driver	4,417.02	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-1,531.50*	
01 22 23 00-1771	WK	Truck Mounted Under-Bridge Aerial Access, 29.7' Horizontal, 21.5' Vertical, 990 Lb. Capacity At 35' With Full-Time Truck Driver	20,443.87	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-1772	MO	Truck Mounted Under-Bridge Aerial Access, 29.7' Horizontal, 21.5' Vertical, 990 Lb. Capacity At 35' With Full-Time Truck Driver	83,848.79	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-2,655.14*	
01 22 23 00-1773	DAY	Truck Mounted Under-Bridge Aerial Access, 66' Horizontal, 31.4' Vertical, 1,760 Lb. Capacity At 35' With Full-Time Truck Driver	5,128.21	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-1,753.75*	
01 22 23 00-1774	WK	Truck Mounted Under-Bridge Aerial Access, 66' Horizontal, 31.4' Vertical, 1,760 Lb. Capacity At 35' With Full-Time Truck Driver	23,179.24	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-1775	MO	Truck Mounted Under-Bridge Aerial Access, 66' Horizontal, 31.4' Vertical, 1,760 Lb. Capacity At 35' With Full-Time Truck Driver	93,331.43	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-3,034.44*	
01 22 23 00-1776		**Truck Mounted Accessories** *(01 22 23 00-1662)* Note: Includes delivery to job site and pick-up when complete.		
01 22 23 00-1777		**Truck Mounted Arrow Boards** *(01 22 23 00-1776)*		
01 22 23 00-1778	DAY	Truck Mounted Arrow Board	48.77	
		For Half Day Usage, Deduct	*-15.24*	
01 22 23 00-1779	WK	Truck Mounted Arrow Board	193.99	
01 22 23 00-1780	MO	Truck Mounted Arrow Board	691.70	
		For >6 Months (>26 Weeks), Deduct	*-27.67*	
01 22 23 00-1781		**Trailers** *(01 22 23 00-1662)* Note: Includes delivery to job site and pick-up when complete.		
01 22 23 00-1782		**Platform Trailers** *(01 22 23 00-1781)*		
01 22 23 00-1783	DAY	25 Ton Capacity Platform Trailer	172.07	
		For Half Day Usage, Deduct	*-53.77*	
01 22 23 00-1784	WK	25 Ton Capacity Platform Trailer	677.64	
01 22 23 00-1785	MO	25 Ton Capacity Platform Trailer	2,412.28	
		For >6 Months (>26 Weeks), Deduct	*-96.49*	
01 22 23 00-1786	DAY	40 Ton Capacity Platform Trailer	179.87	
		For Half Day Usage, Deduct	*-56.21*	
01 22 23 00-1787	WK	40 Ton Capacity Platform Trailer	714.18	
01 22 23 00-1788	MO	40 Ton Capacity Platform Trailer	2,559.50	
		For >6 Months (>26 Weeks), Deduct	*-102.38*	
01 22 23 00-1789	DAY	50 Ton Capacity Platform Trailer	206.49	
		For Half Day Usage, Deduct	*-64.53*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-1790	WK	50 Ton Capacity Platform Trailer	815.29	
01 22 23 00-1791	MO	50 Ton Capacity Platform Trailer	2,912.22	
		For >6 Months (>26 Weeks), Deduct	*-116.49*	
01 22 23 00-1792	DAY	75 Ton Capacity Platform Trailer	269.64	
		For Half Day Usage, Deduct	*-84.26*	
01 22 23 00-1793	WK	75 Ton Capacity Platform Trailer	1,067.89	
01 22 23 00-1794	MO	75 Ton Capacity Platform Trailer	3,821.87	
		For >6 Months (>26 Weeks), Deduct	*-152.87*	

01 22 23 00-1795 Water Trailers With Pump *(01 22 23 00-1781)*

01 22 23 00-1796	DAY	500 To 600 Gallon Water Trailer With Pump	165.12	
		For Half Day Usage, Deduct	*-51.60*	
01 22 23 00-1797	WK	500 To 600 Gallon Water Trailer With Pump	423.56	
01 22 23 00-1798	MO	500 To 600 Gallon Water Trailer With Pump	1,134.28	
		For >6 Months (>26 Weeks), Deduct	*-45.37*	

01 22 23 00-1799 Manual Powered, Full, Rear Dump Trailer *(01 22 23 00-1781)*

01 22 23 00-1800	DAY	10 CY, Manual Powered, Full, Rear Dump Trailer	292.47	
		For Half Day Usage, Deduct	*-91.40*	
01 22 23 00-1801	WK	10 CY, Manual Powered, Full, Rear Dump Trailer	1,167.66	
01 22 23 00-1802	MO	10 CY, Manual Powered, Full, Rear Dump Trailer	4,182.66	
		For >6 Months (>26 Weeks), Deduct	*-167.31*	
01 22 23 00-1803	DAY	13 CY, Manual Powered, Full, Rear Dump Trailer	336.08	
		For Half Day Usage, Deduct	*-105.03*	
01 22 23 00-1804	WK	13 CY, Manual Powered, Full, Rear Dump Trailer	1,344.34	
01 22 23 00-1805	MO	13 CY, Manual Powered, Full, Rear Dump Trailer	4,797.50	
		For >6 Months (>26 Weeks), Deduct	*-191.90*	
01 22 23 00-1806	DAY	16 CY, Manual Powered, Full, Rear Dump Trailer	376.68	
		For Half Day Usage, Deduct	*-117.71*	
01 22 23 00-1807	WK	16 CY, Manual Powered, Full, Rear Dump Trailer	1,495.44	
01 22 23 00-1808	MO	16 CY, Manual Powered, Full, Rear Dump Trailer	5,322.69	
		For >6 Months (>26 Weeks), Deduct	*-212.91*	

01 22 23 00-1809 Hydraulic Lift, Rear Dump Trailers *(01 22 23 00-1781)*

01 22 23 00-1810	DAY	30 Ton Capacity, 18'-20' Deck Length, Hydraulic, Rear Dump Trailer	336.49	
		For Half Day Usage, Deduct	*-105.15*	
01 22 23 00-1811	WK	30 Ton Capacity, 18'-20' Deck Length, Hydraulic, Rear Dump Trailer	1,456.92	
01 22 23 00-1812	MO	30 Ton Capacity, 18'-20' Deck Length, Hydraulic, Rear Dump Trailer	5,455.57	
01 22 23 00-1813	DAY	40 Ton Capacity, 18'-20' Deck Length, Hydraulic, Rear Dump Trailer	416.33	
		For Half Day Usage, Deduct	*-130.10*	
01 22 23 00-1814	WK	40 Ton Capacity, 18'-20' Deck Length, Hydraulic, Rear Dump Trailer	1,811.01	
01 22 23 00-1815	DAY	40 Ton Capacity, 18'-20' Deck Length, Hydraulic, Rear Dump Trailer	6,759.13	
		For Half Day Usage, Deduct	*-2,112.23*	
01 22 23 00-1816	DAY	60 Ton Capacity, 18'-20' Deck Length, Hydraulic, Rear Dump Trailer	544.43	
		For Half Day Usage, Deduct	*-170.13*	
01 22 23 00-1817	WK	60 Ton Capacity, 18'-20' Deck Length, Hydraulic, Rear Dump Trailer	2,350.02	
01 22 23 00-1818	MO	60 Ton Capacity, 18'-20' Deck Length, Hydraulic, Rear Dump Trailer	8,779.88	
01 22 23 00-1819	DAY	80 Ton Capacity, 18'-20' Deck Length, Hydraulic, Rear Dump Trailer	575.10	
		For Half Day Usage, Deduct	*-179.72*	
01 22 23 00-1820	WK	80 Ton Capacity, 18'-20' Deck Length, Hydraulic, Rear Dump Trailer	2,469.55	
01 22 23 00-1821	MO	80 Ton Capacity, 18'-20' Deck Length, Hydraulic, Rear Dump Trailer	9,190.35	
01 22 23 00-1822	DAY	100 Ton Capacity, 18'-20' Deck Length, Hydraulic, Rear Dump Trailer	589.99	
		For Half Day Usage, Deduct	*-184.37*	
01 22 23 00-1823	WK	100 Ton Capacity, 18'-20' Deck Length, Hydraulic, Rear Dump Trailer	2,532.70	
01 22 23 00-1824	MO	100 Ton Capacity, 18'-20' Deck Length, Hydraulic, Rear Dump Trailer	9,454.22	

01 22 23 00-1825 Trailer Mounted Equipment *(01 22 23 00-1662)*

01 22 23 00-1826 Trailer Mounted Under-Bridge Aerial Access Platform *(01 22 23 00-1825)*

Note: Includes full-time operator. Excludes truck.

01 22 23 00-1827	DAY	Trailer Mounted Under-Bridge Aerial Access 32' With Full-Time Operator	3,074.19	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-1,111.87*	
01 22 23 00-1828	WK	Trailer Mounted Under-Bridge Aerial Access 32' With Full-Time Operator	10,835.24	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-1829	MO	Trailer Mounted Under-Bridge Aerial Access 32' With Full-Time Operator	36,369.31	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-755.96*	
01 22 23 00-1830	DAY	Trailer Mounted Under-Bridge Aerial Access 35' With Full-Time Operator	3,300.98	
		For Equipment Without Operator, Deduct	*-806.32*	
		For Half Day Usage, Deduct	*-1,182.74*	
01 22 23 00-1831	WK	Trailer Mounted Under-Bridge Aerial Access 35' With Full-Time Operator	11,515.61	
		For Equipment Without Operator, Deduct	*-4,031.62*	
01 22 23 00-1832	MO	Trailer Mounted Under-Bridge Aerial Access 35' With Full-Time Operator	38,259.21	
		For Equipment Without Operator, Deduct	*-17,470.36*	
		For >6 Months (>26 Weeks), Deduct	*-831.55*	

01 22 23 00-1833 Trailer Mounted Bridge Stripping Buggy *(01 22 23 00-1825)*

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 22 23 00-1834	DAY	Trailer Mounted Bridge Overhang Stripping Buggy	257.34	
		For Half Day Usage, Deduct	*-80.42*	
01 22 23 00-1835	WK	Trailer Mounted Bridge Overhang Stripping Buggy	772.06	
01 22 23 00-1836	MO	Trailer Mounted Bridge Overhang Stripping Buggy	2,144.53	
		For >6 Months (>26 Weeks), Deduct	*-85.78*	

01 22 23 00-1837 Portable Trailer Mounted, CCTV Camera Systems *(01 22 23 00-1825)*

Note: Includes trailer. Excludes truck.

01 22 23 00-1838	MO	Portable Trailer Mounted, Single Camera, CCTV Camera System	2,978.85	
		For >6 Months (>26 Weeks), Deduct	*-119.15*	
01 22 23 00-1839	MO	Portable Trailer Mounted, Multi-Camera/Loud Speaker, CCTV Camera System	5,163.34	
		For >6 Months (>26 Weeks), Deduct	*-206.53*	

01 30 Administrative Requirements *(01)*

01 31 Project Management and Coordination *(01 30)*

01 31 33 Project Minimum Labor Costs *(01 31)*

01 31 33 00-0001 Minimum Charge For Labor *(01 31 33)*

Note: Use item exclusively for projects when the sum of line items is less than the minimum charge per occurrence. Item should not be used in conjunction with any other tasks utilizing this labor trade, unless approved by owner. Item quantity is 1, unless approved by owner.

01 31 33 00-0002	EA	Minimum Charge For Brick Layer Note: This task should not be used in conjunction with any other tasks utilizing this labor trade, unless approved by owner. Task quantity is 1, unless approved by owner.	1,000.27
01 31 33 00-0003	EA	Minimum Charge For Carpenter Note: This task should not be used in conjunction with any other tasks utilizing this labor trade, unless approved by owner. Task quantity is 1, unless approved by owner.	1,257.52
01 31 33 00-0004	EA	Minimum Charge For Carpet, Linoleum Note: This task should not be used in conjunction with any other tasks utilizing this labor trade, unless approved by owner. Task quantity is 1, unless approved by owner.	1,018.74
01 31 33 00-0005	EA	Minimum Charge For Cement Mason Note: This task should not be used in conjunction with any other tasks utilizing this labor trade, unless approved by owner. Task quantity is 1, unless approved by owner.	892.14
01 31 33 00-0006	EA	Minimum Charge For Drywall Finisher Note: This task should not be used in conjunction with any other tasks utilizing this labor trade, unless approved by owner. Task quantity is 1, unless approved by owner.	1,111.67
01 31 33 00-0007	EA	Minimum Charge For Drywall Installer Note: This task should not be used in conjunction with any other tasks utilizing this labor trade, unless approved by owner. Task quantity is 1, unless approved by owner.	1,218.12
01 31 33 00-0008	EA	Minimum Charge For Electrician Note: This task should not be used in conjunction with any other tasks utilizing this labor trade, unless approved by owner. Task quantity is 1, unless approved by owner.	1,046.26
01 31 33 00-0009	EA	Minimum Charge For Glazier Note: This task should not be used in conjunction with any other tasks utilizing this labor trade, unless approved by owner. Task quantity is 1, unless approved by owner.	945.19
01 31 33 00-0010	EA	Minimum Charge For Insulator Note: This task should not be used in conjunction with any other tasks utilizing this labor trade, unless approved by owner. Task quantity is 1, unless approved by owner.	1,107.53
01 31 33 00-0011	EA	Minimum Charge For Laborer Note: This task should not be used in conjunction with any other tasks utilizing this labor trade, unless approved by owner. Task quantity is 1, unless approved by owner.	787.33
01 31 33 00-0012	EA	Minimum Charge For Landscape Maintenance Worker Note: This task should not be used in conjunction with any other tasks utilizing this labor trade, unless approved by owner. Task quantity is 1, unless approved by owner.	912.33
01 31 33 00-0013	EA	Minimum Charge For Ornamental Metal Worker Note: This task should not be used in conjunction with any other tasks utilizing this labor trade, unless approved by owner. Task quantity is 1, unless approved by owner.	1,098.48
01 31 33 00-0014	EA	Minimum Charge For Painter, Ordinary Note: This task should not be used in conjunction with any other tasks utilizing this labor trade, unless approved by owner. Task quantity is 1, unless approved by owner.	799.31
01 31 33 00-0015	EA	Minimum Charge For Plasterer Note: This task should not be used in conjunction with any other tasks utilizing this labor trade, unless approved by owner. Task quantity is 1, unless approved by owner.	1,114.02
01 31 33 00-0016	EA	Minimum Charge For Plumber Note: This task should not be used in conjunction with any other tasks utilizing this labor trade, unless approved by owner. Task quantity is 1, unless approved by owner.	1,228.39
01 31 33 00-0017	EA	Minimum Charge For Roofer, Tile/Slate Note: This task should not be used in conjunction with any other tasks utilizing this labor trade, unless approved by owner. Task quantity is 1, unless approved by owner.	1,211.15
01 31 33 00-0018	EA	Minimum Charge For Roofer, Composite Built-Up Note: This task should not be used in conjunction with any other tasks utilizing this labor trade, unless approved by owner. Task quantity is 1, unless approved by owner.	1,244.60
01 31 33 00-0019	EA	Minimum Charge For Sheet Metal Worker Note: This task should not be used in conjunction with any other tasks utilizing this labor trade, unless approved by owner. Task quantity is 1, unless approved by owner.	1,154.95
01 31 33 00-0020	EA	Minimum Charge For Sprinkler Installer Note: This task should not be used in conjunction with any other tasks utilizing this labor trade, unless approved by owner. Task quantity is 1, unless approved by owner.	1,035.36
01 31 33 00-0021	EA	Minimum Charge For Tile Layer (Floor) Note: This task should not be used in conjunction with any other tasks utilizing this labor trade, unless approved by owner. Task quantity is 1, unless approved by owner.	967.36

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

01 35 Special Procedures *(01 30)*

01 35 29 Health, Safety, and Emergency Response Procedures *(01 35)*

See CSI section 02 90 00 00-0000 for disaster recovery task.

01 35 29 00-0001 Emergency Response *(01 35 29)*

See CSI section 01 22 20 00-0001 for labor services to load and unload shipping container, 01 22 20 00-0055 for security guards, 01 22 23 00-0000 for portable equipment usage (air compressors, generators, lighting, etc.), 01 52 13 00-0030 for container usage.

01 35 29 00-0002	MI	Trucking Delivery Of 20' Shipping Container	2.77	
01 35 29 00-0003	MI	Trucking Delivery Of 40' Shipping Container	5.54	

01 35 33 Infection Control Procedures *(01 35)*

See CSI section 02 87 19 00-0000 for Bio-Hazard And Infectious Disease Control Remediation.

01 40 Quality Requirements *(01)*

01 41 Regulatory Requirements *(01 40)*

01 41 26 Permit Requirements *(01 41)*

See CSI section 01 22 16 00-0001 for reimbursable fees.

01 42 References *(01 40)*

01 42 13 Abbreviations and Acronyms *(01 42)*

Note: For specification publishing. Review specifications for requirements.

01 42 13 00-0001	NTE	Abbreviations And Acronyms Note: For specification publishing. Review specifications for requirements.	0.00

01 42 16 Definitions *(01 42)*

Note: For specification publishing. Review specifications for requirements.

01 42 16 00-0001	NTE	Definitions Note: For specification publishing. Review specifications for requirements.	0.00

01 42 19 Reference Standards *(01 42)*

Note: For specification publishing. Review specifications for requirements.

01 42 19 00-0001	NTE	Reference Standards Note: For specification publishing. Review specifications for requirements.	0.00

01 42 21 Construction Suppliers or Venor List *(01 42)*

Note: For specification publishing. Review specifications for requirements.

01 42 21 00-0001	NTE	Construction Suppliers or Venor List Note: For specification publishing. Review specifications for requirements.	0.00

01 45 Quality Control *(01 40)*

Note: Refer to section specifications for testing included with other sections.

01 45 23 Testing and Inspecting Services *(01 45)*

Note: For application to existing materials/site conditions or additional testing over specifications stated tests. Includes acquisition and maintenance of sample (for laboratory tests) to include shipping as required, applicable equipment for field tests, and appropriate test reports.

01 45 23 00-0001 Soils/Aggregate Testing *(01 45 23)*

01 45 23 00-0002 Field Soils Tests *(01 45 23 00-0001)*

01 45 23 00-0003	EA	Plasticity Index Soils Test, ASTM D-4318, Field Soils Test	362.89
01 45 23 00-0004	EA	4" Compaction Curves Soils Test, ASTM D-1557, Field Soils Test	515.06
01 45 23 00-0005	EA	6" Compaction Curves Soils Test, ASTM D-1557, Field Soils Test	585.30
01 45 23 00-0006	EA	Resistance (R) Value Soils Test, CA 301, Field Soils Test	468.24
01 45 23 00-0007	EA	Soils Classification Test, ASTM D-2487, Field Soils Test	702.36
01 45 23 00-0008	SET	Cement Treated Base Laboratory Design, Soil Cement, Field Soils Test	1,404.23
01 45 23 00-0009	EA	Moisture Content, Field Soils Test	52.66
01 45 23 00-0010	EA	UBC Or Swell Test, Field Soils Test	140.47
01 45 23 00-0011	EA	Proctor Compaction 4" Standard Mold ASTM D698, Field Soils Test	351.06
01 45 23 00-0012	EA	Proctor Compaction 6" Standard Mold, Field Soils Test	438.82
01 45 23 00-0013	EA	Density And Classification Test, Field Soils Test	106.93
01 45 23 00-0014	EA	Percolation Test, Field Soils Test	267.32
01 45 23 00-0015	EA	Infiltration Test, Field Soils Test	534.64

01 45 23 00-0016 Aggregate Testing *(01 45 23 00-0001)*

01 45 23 00-0017	EA	Coarse Aggregate Sieve Analysis Test, ASTM C-136, CA 202	117.06
01 45 23 00-0018	EA	Fine Aggregate Sieve Analysis Test, ASTM C-136, CA 202	210.71
01 45 23 00-0019	EA	Combined Aggregate Sieve Analysis Test, ASTM C-136, CA 202	292.65
01 45 23 00-0020	EA	Sieve Analysis, Pit Run, ASTM C136 Note: Includes wash.	173.76

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 45 23 00-0021	EA	Specific Special Gravity, Course, ASTM C127 Note: Includes absorption test.	185.99	
01 45 23 00-0022	EA	Special Gravity, Fine, ASTM C127 Note: Includes absorption test.	166.75	
01 45 23 00-0023	EA	Coarse Aggregate Bulk SSD Specific Gravity Test, ASTM C-128	247.99	
01 45 23 00-0024	EA	Fine Aggregate Bulk SSD Specific Gravity Test, ASTM C-128	234.12	
01 45 23 00-0025	EA	Aggregate Cleanness Value, ASTM C-128, CA 227	234.12	
01 45 23 00-0026	EA	Sand Equivalent, Average of 3 Tests, ASTM D2419, CA 217	175.59	
01 45 23 00-0027	EA	Fine Aggregate Durability Index, CA 229	187.30	
01 45 23 00-0028	EA	Sodium And Magnesium Soundness, ASTM C88	491.48	
01 45 23 00-0029	EA	Los Angeles Rattler, ASTM C-131, CA 211	374.59	
01 45 23 00-0030	EA	Los Angeles Rattler, ASTM C-535	374.59	
01 45 23 00-0031	EA	Unit Weight Of Aggregates, ASTM C29	105.35	
01 45 23 00-0032	EA	Organic Impurities In Sand, ASTM C40	105.32	
01 45 23 00-0033	EA	Crushed Particle, ASTM California Test Method	105.32	
01 45 23 00-0034	EA	Clay Lump And Friable Particles, ASTM C142	210.63	
01 45 23 00-0035		Permeability Tests *(01 45 23 00-0001)*		
01 45 23 00-0036		In-Place Tests *(01 45 23 00-0035)*		
01 45 23 00-0037	EA	Double Ring Infiltrometer Test, ASTM D3385	1,859.92	
01 45 23 00-0038	EA	Unconfined Compressive Strength (Pocket Penetrometer) Test	87.76	
01 45 23 00-0039		Lab Tests *(01 45 23 00-0035)*		
01 45 23 00-0040	EA	Falling Head Rigid Wall Consolidometer Technique CAE	867.96	
01 45 23 00-0041	EA	Falling Head Permeability Test EPA-9100	867.96	
01 45 23 00-0042	EA	Constant Head Permeability Test For Granular Soils, ASTM D2432	495.98	
01 45 23 00-0043		Insitu Tests *(01 45 23 00-0001)*		
01 45 23 00-0044	EA	Standard Penetration With Split Spoon	29.67	
01 45 23 00-0045	EA	Split Spoon Tripod	55.38	
01 45 23 00-0046	EA	Thin Walled Tube/Shelby	158.22	
01 45 23 00-0047	VLF	Cone Penetrometer	11.87	
01 45 23 00-0048	EA	Pressuremeter Insitu Test	296.66	
01 45 23 00-0049	VLF	Dilatometer Insitu Test	5.93	
01 45 23 00-0050	EA	Permeability	197.78	
01 45 23 00-0051	VLF	Observation Well With SB	27.69	
01 45 23 00-0052	VLF	Observation Well Without SB	39.56	
01 45 23 00-0053	EA	Slope Indicator Casing	69.22	
01 45 23 00-0054		Concrete/Cement/Asphalt Testing *(01 45 23)*		
01 45 23 00-0055		Concrete Testing *(01 45 23 00-0054)*		
01 45 23 00-0056	EA	Prepare 6 x 12 Concrete Cylinder And Deliver To Lab	27.14	
01 45 23 00-0057	EA	6 x 12 Cylinder Concrete Compression Test, ASTM C-39 Or ASTM D1633	74.40	
01 45 23 00-0058	EA	Concrete Cores Compression Test, ASTM C-42	152.18	
01 45 23 00-0059	EA	6 x 6 x 18 Concrete Flexural Test, ASTM C-78	222.41	
01 45 23 00-0060	EA	Unit Weight Of Concrete Cylinder, ASTM C-567	81.94	
01 45 23 00-0061	EA	Concrete Mix Design Review	444.83	
01 45 23 00-0062	EA	Trial Concrete Batch Prepared In Laboratory	1,053.54	
01 45 23 00-0063	EA	Concrete Shrinkage, ASTM C-157 Modified	819.42	
01 45 23 00-0064	EA	6 x 12 Concrete Cylinder Splitting Tensile Test, ASTM C-496	126.42	
01 45 23 00-0065	EA	Concrete Slump Test, ASTM C143	58.53	
01 45 23 00-0066	EA	Concrete Air Content Test, ASTM C138, ASTM C173, Or ASTM C231	58.53	
01 45 23 00-0067		Cement Testing *(01 45 23 00-0054)*		
01 45 23 00-0068	EA	CCR Title 24, Cement Grab Sample Note: Includes sealing and storing 1 year.	58.53	
01 45 23 00-0069	EA	2" x 2" x 2" Cube Compression Test, All Type Materials	93.65	
01 45 23 00-0070		Asphaltic Concrete Testing *(01 45 23 00-0054)*		
01 45 23 00-0071	EA	Hveem Asphaltic Concrete Stability Test, CA 366	117.06	
01 45 23 00-0072	EA	Marshall Asphaltic Concrete Stability Test (3 Specimens), ASTM D-6926/6927	304.36	
01 45 23 00-0073	EA	Stability Tests, Premixed, ASTM D1559	117.06	
01 45 23 00-0074	EA	Stability Tests, Lab. Mixed, ASTM D1559	304.36	
01 45 23 00-0075	EA	Swell Test, CA 305 Note: Includes compaction.	140.47	
01 45 23 00-0076	EA	% Asphalt Extraction Test, ASTM D-2172 B	351.18	
01 45 23 00-0077	EA	Gradation On Extracted Sample, ASTM D-5444	234.12	
01 45 23 00-0078	EA	Maximum Theoretical Unit Weight, ASTM C2041	223.19	
01 45 23 00-0079	EA	Unit Weight Sample Requiring Compaction, California Test Method 308	46.82	
01 45 23 00-0080	EA	Asphalt Unit Weight On Core Test, CA 308C	46.82	
01 45 23 00-0081	HR	Nuclear Field Density Testing, 4 Hour Minimum	241.14	
01 45 23 00-0082	EA	Asphalt Film Stripping Test, CTM 302/AASHTO T182/ASTM D1664	120.29	
01 45 23 00-0083	EA	Penetration, ASTM D5	169.10	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 45 23 00-0084		Masonry/Concrete Block/Tile Testing *(01 45 23)*		
01 45 23 00-0085		Masonry Testing *(01 45 23 00-0084)*		
01 45 23 00-0086	EA	2" x 4" Cylinder Mortar Compression Test	77.26	
01 45 23 00-0087	EA	4" x 4" x 8" Grout Prisms Compression Test	77.26	
01 45 23 00-0088	EA	Masonry Cores Compression Test	152.18	
01 45 23 00-0089	EA	Composite Grouted Prism Compression Test	292.65	
01 45 23 00-0090		Concrete Block Testing (ASTM C140 Or CMA Per Specimen) *(01 45 23 00-0084)*		
01 45 23 00-0091	EA	Up To 8" x 8" x 16" Concrete Block Compression Test, ASTM C-140	187.30	
01 45 23 00-0092	EA	Absorption Test, Moisture Content And Unit Weight	128.77	
01 45 23 00-0093	EA	First Unit, Moisture Condition By Relative Humidity, ASTM C427	491.48	
01 45 23 00-0094	EA	Moisture Condition By Relative Humidity, ASTM C427, Additional Unit	245.74	
01 45 23 00-0095		Metals Testing *(01 45 23)*		
01 45 23 00-0096		Tank Tightness Testing *(01 45 23 00-0095)*		
01 45 23 00-0097	GAL	Up To 20 Gallon, Hydrostatic Pressure Testing Of Air Receiving Tanks	9.10	
01 45 23 00-0098	GAL	>20 To 120 Gallon, Hydrostatic Pressure Testing Of Air Receiving Tanks	7.80	
01 45 23 00-0099	EA	Up To 12,000 Gallons, Tank Volumetric Tightness Testing	2,340.46	
01 45 23 00-0100	EA	>12,000 To 29,999 Gallons, Tank Volumetric Tightness Testing	2,859.65	
01 45 23 00-0101	EA	>29,999 Gallons, Tank Volumetric Tightness Testing	3,641.88	
01 45 23 00-0102		Tank Line Tightness Testing *(01 45 23 00-0095)*		
01 45 23 00-0103	EA	Up To 12,000 Gallons, Tank Line Volumetric Tightness Testing	493.85	
01 45 23 00-0104	EA	>12,000 To 29,999 Gallons, Tank Line Volumetric Tightness Testing	548.37	
01 45 23 00-0105	EA	>29,999 Gallons, Tank Line Volumetric Tightness Testing	602.70	
01 45 23 00-0106		Other Testing *(01 45 23)*		
01 45 23 00-0107		Special Testing *(01 45 23 00-0106)*		
01 45 23 00-0108	EA	Asphalt Roofing Cutout Samples, To Determine Unit Weight	175.53	
01 45 23 00-0109	EA	Complete Built-Up Roof Analysis, ASTM D2829 Or ASTM D3617	1,053.17	
01 45 23 00-0110	EA	Total Coliform Bacteria And E. Coli Bacteria Test	54.71	
01 45 23 00-0111	EA	Testing For The Presence Of Polychlorinated Biphenyl (PCB) In Caulk, Analysis Per Sample	226.93	
01 45 23 00-0112	EA	Testing For The Presence Of Polychlorinated Biphenyl (PCB) In Soil, Analysis Per Sample	226.93	
01 45 23 00-0113	EA	Testing For The Presence Of Polychlorinated Biphenyl (PCB) Using Wipe Sampling, Analysis Per Sample	226.93	
01 45 23 00-0114	EA	Testing For The Presence Of Polychlorinated Biphenyl (PCB) In Air, Analysis Per Sample	1,248.12	
01 45 23 00-0115	EA	Testing And Certification Of Backflow Valves	599.07	
01 45 23 00-0116		Non-destructive Field Testing Services *(01 45 23 00-0106)*		
01 45 23 00-0117		Infrared Thermography *(01 45 23 00-0116)*		
		Note: The following tasks use certified infrared (IR) thermographers, such as Stockton Infrared Thermographic Services, Inc. and United Infrared, Inc., to scan for specific problems and produce a report on the findings. The contractor is entitled to the mobilization charge and the appropriate square foot or hourly task.		
01 45 23 00-0118		Roof Investigation And Moisture Survey Using Infrared Thermography *(01 45 23 00-0117)*		
		Note: For on the roof surveys.		
01 45 23 00-0119	EA	Roof Investigation And Moisture Survey Using Infrared Thermography, Mobilization Charge	4,084.74	
01 45 23 00-0120	CSF	Up To 10,000 SF, Roof Investigation And Moisture Survey Using Infrared Thermography	6.81	
		For CADD Drawings, Add	*1.36*	
01 45 23 00-0121	CSF	>10,000 To 50,000 SF, Roof Investigation And Moisture Survey Using Infrared Thermography	4.54	
		For CADD Drawings, Add	*0.91*	
01 45 23 00-0122	CSF	>50,000 To 250,000 SF, Roof Investigation And Moisture Survey Using Infrared Thermography	3.40	
		For CADD Drawings, Add	*0.68*	
		For Elevated Infrared Thermography Roof Investigation, Add	*0.85*	
		For Aerial Infrared Thermography Roof Investigation, Add	*0.85*	
01 45 23 00-0123	CSF	>250,000 SF, Roof Investigation And Moisture Survey Using Infrared Thermography	2.27	
		For CADD Drawings, Add	*0.45*	
		For Elevated Infrared Thermography Roof Investigation, Add	*0.57*	
		For Aerial Infrared Thermography Roof Investigation, Add	*0.57*	
01 45 23 00-0124		Building Moisture Investigation Using Infrared Thermography *(01 45 23 00-0117)*		
		Note: For finding moisture in walls and windows.		
01 45 23 00-0125	EA	Building Moisture Investigation Using Infrared Thermography, Mobilization Charge	2,155.84	
01 45 23 00-0126	CSF	Up To 1,000 SF, Building Moisture Investigation Using Infrared Thermography	6.81	
		For Digital Or Analog Recording Of All Items, Add	*3.41*	
01 45 23 00-0127	CSF	>1,000 To 5,000 SF, Building Moisture Investigation Using Infrared Thermography	4.54	
		For Digital Or Analog Recording Of All Items, Add	*2.27*	
01 45 23 00-0128	CSF	>5,000 SF, Building Moisture Investigation Using Infrared Thermography	2.27	
		For Digital Or Analog Recording Of All Items, Add	*1.14*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 45 23 00-0129		General Building Investigation Using Infrared Thermography *(01 45 23 00-0117)*		
		Note: For finding missing or misplaced insulation, air leakage and delamination.		
01 45 23 00-0130	EA	General Building Investigation Using Infrared Thermography, Mobilization Charge	4,425.14	
01 45 23 00-0131	CSF	Up To 1,000 SF, General Building Investigation Using Infrared Thermography	6.81	
		For Digital Or Analog Recording Of All Items, Add	*3.41*	
01 45 23 00-0132	CSF	>1,000 To 5,000 SF, General Building Investigation Using Infrared Thermography	4.54	
		For Digital Or Analog Recording Of All Items, Add	*2.27*	
01 45 23 00-0133	CSF	>5,000 SF, General Building Investigation Using Infrared Thermography	2.27	
		For Digital Or Analog Recording Of All Items, Add	*1.14*	
01 45 23 00-0134		Electrical /Mechanical Equipment Scanning Using Infrared Thermography *(01 45 23 00-0117)*		
		Note: For diagnosing electrical issues such as loose connections, overloaded or imbalanced circuits, faulty breakers, damaged switches, faulty fuses, etc. For diagnosing electrical issues caused by resistance and mechanical issues caused by friction.		
01 45 23 00-0135	EA	Electrical /Mechanical Equipment Scanning Using Infrared Thermography, Mobilization Charge	2,155.84	
01 45 23 00-0136	HR	Electrical /Mechanical Equipment Scanning Using Infrared Thermography	200.79	
		For Digital Or Analog Recording Of All Items, Add	*30.05*	
01 45 23 00-0137		Concrete Block Wall Investigation Using Infrared Thermography *(01 45 23 00-0117)*		
		Note: For investigating issues with grouted cells, bond beams and other structural components in concrete block walls.		
01 45 23 00-0138	EA	Concrete Block Wall Investigation Using Infrared Thermography, Mobilization Charge	2,155.84	
01 45 23 00-0139	CSF	Up To 50,000 SF, Concrete Block Wall Investigation Using Infrared Thermography	6.81	
		For Digital Or Analog Recording Of All Items, Add	*1.02*	
01 45 23 00-0140	CSF	>50,000 SF, Concrete Block Wall Investigation Using Infrared Thermography	4.54	
		For Digital Or Analog Recording Of All Items, Add	*0.68*	
01 45 23 00-0141		Other Non-destructive Field Testing Services *(01 45 23 00-0116)*		
01 45 23 00-0142	HR	ASNT Certified Level I NDT Consultant	77.35	
01 45 23 00-0143	HR	ASNT Certified Level II NDT Consultant	86.50	
01 45 23 00-0144	HR	ASNT Certified Level III NDT Consultant	101.68	
01 45 23 00-0145	HR	Certified Industrial Radiography Radiation Safety Personnel	116.45	
01 45 23 00-0146		Testing Professional Services *(01 45 23 00-0106)*		
01 45 23 00-0147	HR	Concrete, Steel, Masonry, Expansion Anchor And Soils Inspection	217.73	
01 45 23 00-0148	HR	Laboratory Technician	210.71	
01 45 23 00-0149	HR	Portable Digital Reinforcement Scanner	304.36	
01 45 23 00-0150	HR	Subsurface Detection Radar System	515.06	
01 45 23 00-0151	HR	Pavement Rehabilitation Analysis Using Deflectors	585.30	
01 45 23 00-0152		Concrete Slab Moisture Testing *(01 45 23 00-0106)*		
01 45 23 00-0153	EA	Concrete Slab, Moisture Emission Determination For Floor Covering On Existing Concrete	166.88	
01 45 29		**Testing Laboratory Services** *(01 45)*		
		Note: For application to existing materials/site conditions or additional testing over specifications stated tests.		
01 45 29 00-0001		Soil Borings Laboratory Tests *(01 45 29)*		
01 45 29 00-0002	EA	Atterberg Limits - Liquid Limits (LL) And Plastic Limits (PL), T89, T90, ASTM D4318, Soil Borings Laboratory Test	161.19	
01 45 29 00-0003	EA	Shrinkage Limit, Soil Borings Laboratory Test	51.43	
01 45 29 00-0004	EA	Unconfined Compressive Strength of Cohesive Soils, Soil Borings Laboratory Test	124.00	
01 45 29 00-0005	EA	Consolidation, Soil Borings Laboratory Test	867.96	
01 45 29 00-0006	EA	Swell Test, Soil Borings Laboratory Test	136.08	
01 45 29 00-0007	EA	In Place Density, Soil Borings Laboratory Test	37.20	
01 45 29 00-0008	EA	Moisture Content, ASTM D2216, Soil Borings Laboratory Test	23.11	
01 45 29 00-0009	EA	Moisture-Density Determination, Standard, ASTM D698, Soil Borings Laboratory Test	186.55	
01 45 29 00-0010	EA	Moisture-Density Determination, Modified, ASTM D1557, Soil Borings Laboratory Test	186.55	
01 45 29 00-0011	EA	Moisture-Density Determination, One Point Test, Soil Borings Laboratory Test	103.64	
01 45 29 00-0012	EA	Hydrometer Analysis, Soil Borings Laboratory Test	298.36	
01 45 29 00-0013	EA	Specific Gravity, ASTM D854, Soil Borings Laboratory Test	104.02	
01 45 29 00-0014	EA	Partial Sieve Analysis, Soil Borings Laboratory Test	20.57	
01 45 29 00-0015	EA	Laboratory Permeability, Soil Borings Laboratory Test	1,028.53	
01 45 29 00-0016	EA	Sieve Analysis, ASTM D422, Soil Borings Laboratory Test	208.04	
01 45 29 00-0017	EA	Sulfate Soundness, Soil Borings Laboratory Test	257.13	
01 45 29 00-0018	EA	Los Angeles Abrasion, Soil Borings Laboratory Test	475.98	
01 45 29 00-0019	EA	Soil Bearing Ratio, ASTM D1883	526.77	
01 45 29 00-0020	EA	Compaction Test Subgrade, Soil Borings Laboratory Test	154.28	
01 45 29 00-0021	EA	Compaction Test Base Course, Soil Borings Laboratory Test	171.42	
01 45 29 00-0022	EA	In Place Density And Water Content Test By Nuclear Methods, ASTM D6938, Soil Borings Laboratory Test	367.92	
01 45 29 00-0023	EA	Field Density Sand Cone, AASHTO T-191, ASTM D1556, Soil Borings Laboratory Test	78.85	
01 45 29 00-0024	EA	Direct Shear Per Point, ASTM D3080, Soil Borings Laboratory Test	310.91	
01 45 29 00-0025	EA	Unconfined Compression, ASTM D2166 And D2938, Soil Borings Laboratory Test	103.64	
01 45 29 00-0026	EA	Triaxial Shear, Per Point, ASTM D2850, Unconsolidated-Undrained, Soil Borings Laboratory Test	414.54	
01 45 29 00-0027	EA	Triaxial Shear, Per Point, ASTM D2850, Consolidated-Undrained, Soil Borings Laboratory Test	777.27	
01 45 29 00-0028	EA	Triaxial Shear, Per Point, ASTM D2850, Consolidated-Drained, Soil Borings Laboratory Test	932.73	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 45 29 00-0029	EA	Permeability, ASTM D2434, Soil Borings Laboratory Test	466.36	
01 45 29 00-0030	EA	Permeability, ASTM D2434, Undisturbed/Remolded, Soil Borings Laboratory Test	518.18	
01 45 29 00-0031	EA	One-Dimension Consolidation/Swell, ASTM D2435 And D4186, 4 KSF Load, Soil Borings Laboratory Test	414.54	
01 45 29 00-0032	EA	One-Dimension Consolidation/Swell, ASTM D2435 And D4186, 8 KSF Load, Soil Borings Laboratory Test	155.45	
01 45 29 00-0033	EA	One-Dimension Consolidation/Swell, ASTM D2435 And D4186, 16 KSF Load, Soil Borings Laboratory Test	155.45	
01 45 29 00-0034	EA	One-Dimension Consolidation/Swell, ASTM D2435 And D4186, 32 KSF Load, Soil Borings Laboratory Test	155.45	
01 45 29 00-0035	EA	Classification Of Soil, ASTM D2487, Soil Borings Laboratory Test	124.36	

01 45 29 00-0036 Soil Testing *(01 45 29)*

Note: Analyses must be conducted in accordance with SW846 and TACO requirements. Analytical methods provided herein are suggested methods.

01 45 29 00-0037	EA	Laboratory Analysis For VOCs (5035/8260)	240.75	
01 45 29 00-0038	EA	Laboratory Analysis For SVOCs (8270)	469.46	
01 45 29 00-0039	EA	Laboratory Analysis For Pesticides/Polychlorinated Biphenyl (PCB) (8080/8081/8082)	288.90	
01 45 29 00-0040	EA	Laboratory Analysis For Herbicides (8080/8081/8082)	409.28	
01 45 29 00-0041	EA	Laboratory Analysis For TAL Inorganics (6010/6020/7471)	361.12	
01 45 29 00-0042	EA	Laboratory Analysis For BTEX (5035/8260)	108.34	
01 45 29 00-0043	EA	Laboratory Analysis For PNAs (8270)	180.56	
01 45 29 00-0044	EA	Laboratory Analysis For RCRA Metals Including Mercury (6020/7471)	156.49	
01 45 29 00-0045	EA	Laboratory Analysis For Cyanide (9012)	48.15	
01 45 29 00-0046	EA	Laboratory Analysis For TCLP/SPLP RCRA Lead (1311/1312/6020/7471)	180.56	
01 45 29 00-0047	EA	Laboratory Analysis For pH (9045)	19.26	
01 45 29 00-0048	EA	Laboratory Analysis For Moisture, Ash, And Organic Matter Of Peat And Organic Soils (D2974)	60.19	
01 45 29 00-0049	EA	Laboratory Analysis For Waste Characterization For Full Scan Note: Detection limits must meet the minimum specified detection limits in TACO for Tier 1 Soil Remediation Objectives for residential properties.	2,648.25	
		For Expedited 5 Day Test, Add	*400.00*	

01 50 Temporary Facilities and Controls *(01)*

Note: Tasks in this section shall be used as directed by owner.

01 51 Temporary Utilities *(01 50)*

01 51 13 Temporary Electricity *(01 51)*

01 51 13 00-0001 Temporary Service Switch And/or Building Feeder Switch *(01 51 13)*

Note: Includes all connections and removal after use.

01 51 13 00-0002	EA	Temporary 100 Amperes, NEMA 1 Or 3R, Disconnect Switch With Fuses	1,418.75	
01 51 13 00-0003	EA	Temporary 200 Amperes, NEMA 1 Or 3R, Disconnect Switch With Fuses	2,202.86	
01 51 13 00-0004	EA	Temporary 400 Amperes, 240 Volt, NEMA 3R, Disconnect Switch With Fuses	4,034.55	
01 51 13 00-0005	EA	Temporary 600 Amperes, 240 Volt, NEMA 3R, Disconnect Switch With Fuses	6,614.98	

01 51 13 00-0006 Temporary 120/208 Volt Main Lug Panelboard Complete With Branch Fuses *(01 51 13)*

Note: Includes mounting on wall and removal after use.

01 51 13 00-0007	EA	Temporary 100 Amperes, Panelboard Complete With GFCI Circuit Breakers	1,464.80	
01 51 13 00-0008	EA	Temporary 200 Amperes, Panelboard Complete With GFCI Circuit Breakers	2,052.15	
01 51 13 00-0009	EA	Temporary 400 Amperes, Panelboard Complete With GFCI Circuit Breakers	3,208.99	
01 51 13 00-0010	EA	Temporary 600 Amperes, Panelboard Complete With GFCI Circuit Breakers	4,572.34	

01 51 13 00-0011 Temporary Conduit And Cable For Temporary Disconnect (Safety) Switches And Temporary Panelboards *(01 51 13)*

Note: Includes all connections, fittings, supports and removal after use.

01 51 13 00-0012	LF	Temporary SER Cable (Conduit As Required) For Temporary Disconnect Switches And Temporary Panelboards	12.50	
01 51 13 00-0013	LF	Temporary Branch Circuit Conduit And Wiring For Temporary Disconnect Switches And Temporary Panelboards	13.69	

01 51 26 Temporary Lighting *(01 51)*

01 51 26 00-0001 Temporary Lighting Devices *(01 51 26)*

Note: Includes removal after use.

01 51 26 00-0002	EA	Temporary Exit Light	318.62	
01 51 26 00-0003	EA	Temporary 10 Light String With Cages	109.25	
01 51 26 00-0004	EA	Temporary High Bay Light	401.54	

01 52 Construction Facilities *(01 50)*

Note: Tasks in this section shall be used as directed by owner for owner's use.

01 52 13 Field Offices and Sheds *(01 52)*

01 52 13 00-0001 Field Offices and Office Trailers *(01 52 13)*

Note: Includes toilet, central HVAC, interior doors and partitions. Excludes furniture, utility connections, or service. For Loss Damage Waiver or General Liability Insurance when requested use Reimbursable Fees. Minimum 6 months rental. See CSI section 01 52 13 00-0015 for furniture, skirting, and steps.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 52 13 00-0002	MO	8' x 24' Mobile Office, With Toilet	259.19	
		For Each Delivery And Removal, Two Round Trips, Add	*1,528.52*	
		For Each Set-up (Block And Level), Add	*853.54*	
		For Each Anchoring Into Dirt, Add Per Each Anchor	*238.22*	
		For Each Anchoring Into Asphalt Or Concrete, Add Per Each Anchor	*332.35*	
		For Knockdown, Add	*800.55*	
		For Office Trailer Without Toilet, Deduct	*-51.84*	
01 52 13 00-0003	MO	8' x 32' Mobile Office, With Toilet	293.74	
		For Each Delivery And Removal, Two Round Trips, Add	*1,528.52*	
		For Each Set-up (Block And Level), Add	*853.54*	
		For Each Anchoring Into Dirt, Add Per Each Anchor	*238.22*	
		For Each Anchoring Into Asphalt Or Concrete, Add Per Each Anchor	*332.35*	
		For Knockdown, Add	*800.55*	
		For Office Trailer Without Toilet, Deduct	*-58.75*	
01 52 13 00-0004	MO	10' x 36' Mobile Office, With Toilet	397.42	
		For Each Delivery And Removal, Two Round Trips, Add	*3,057.05*	
		For Each Set-up (Block And Level), Add	*1,339.95*	
		For Each Anchoring Into Dirt, Add Per Each Anchor	*238.22*	
		For Each Anchoring Into Asphalt Or Concrete, Add Per Each Anchor	*332.35*	
		For Knockdown, Add	*1,200.10*	
		For Office Trailer Without Toilet, Deduct	*-79.48*	
01 52 13 00-0005	MO	10' x 40' Mobile Office, With Toilet	423.34	
		For Each Delivery And Removal, Two Round Trips, Add	*3,057.05*	
		For Each Set-up (Block And Level), Add	*1,339.95*	
		For Each Anchoring Into Dirt, Add Per Each Anchor	*238.22*	
		For Each Anchoring Into Asphalt Or Concrete, Add Per Each Anchor	*332.35*	
		For Knockdown, Add	*1,200.10*	
		For Office Trailer Without Toilet, Deduct	*-84.67*	
01 52 13 00-0006	MO	10' x 44' Mobile Office, With Toilet	466.54	
		For Each Delivery And Removal, Two Round Trips, Add	*3,057.05*	
		For Each Set-up (Block And Level), Add	*1,339.95*	
		For Each Anchoring Into Dirt, Add Per Each Anchor	*238.22*	
		For Each Anchoring Into Asphalt Or Concrete, Add Per Each Anchor	*332.35*	
		For Knockdown, Add	*1,200.10*	
01 52 13 00-0007	MO	10' x 50' Mobile Office, With Toilet	492.46	
		For Each Delivery And Removal, Two Round Trips, Add	*3,057.05*	
		For Each Set-up (Block And Level), Add	*1,339.95*	
		For Each Anchoring Into Dirt, Add Per Each Anchor	*238.22*	
		For Each Anchoring Into Asphalt Or Concrete, Add Per Each Anchor	*332.35*	
		For Knockdown, Add	*1,200.10*	
01 52 13 00-0008	MO	12' x 32' Mobile Office, With Toilet	400.05	
		For Each Anchoring Into Dirt, Add Per Each Anchor	*238.22*	
		For Each Anchoring Into Asphalt Or Concrete, Add Per Each Anchor	*332.35*	
		For Knockdown, Add	*1,200.10*	
		For Each Delivery And Removal, Two Round Trips, Add	*788.97*	
		For Each Set-up (Block And Level), Add	*596.40*	
01 52 13 00-0009	MO	12' x 44' Mobile Office, With Toilet	534.86	
		For Each Delivery And Removal, Two Round Trips, Add	*3,057.05*	
		For Each Set-up (Block And Level), Add	*1,339.95*	
		For Each Anchoring Into Dirt, Add Per Each Anchor	*238.22*	
		For Each Anchoring Into Asphalt Or Concrete, Add Per Each Anchor	*332.35*	
		For Knockdown, Add	*1,200.10*	
01 52 13 00-0010	MO	12' x 50' Mobile Office, With Toilet	636.73	
		For Each Delivery And Removal, Two Round Trips, Add	*3,057.05*	
		For Each Set-up (Block And Level), Add	*1,339.95*	
		For Each Anchoring Into Dirt, Add Per Each Anchor	*238.22*	
		For Each Anchoring Into Asphalt Or Concrete, Add Per Each Anchor	*332.35*	
		For Knockdown, Add	*1,200.10*	
01 52 13 00-0011	MO	12' x 60' Mobile Office, With Toilet	880.37	
		For Each Delivery And Removal, Two Round Trips, Add	*3,057.05*	
		For Each Set-up (Block And Level), Add	*1,339.95*	
		For Each Anchoring Into Dirt, Add Per Each Anchor	*238.22*	
		For Each Anchoring Into Asphalt Or Concrete, Add Per Each Anchor	*332.35*	
		For Knockdown, Add	*1,200.10*	
01 52 13 00-0012	MO	24' x 60' Modular Office, With Toilet	1,382.32	
		For Each Delivery And Removal, Two Round Trips, Add	*4,585.58*	
		For Each Set-Up (Block And Level), Add	*2,392.90*	
		For Each Anchoring Into Dirt, Add Per Each Anchor	*238.22*	
		For Each Anchoring Into Asphalt Or Concrete, Add Per Each Anchor	*332.35*	
		For Knockdown, Add	*2,401.66*	
01 52 13 00-0013	MO	24' x 72' Modular Office, With Toilet	1,658.78	
		For Each Delivery And Removal, Two Round Trips, Add	*4,585.58*	
		For Each Set-Up (Block And Level), Add	*2,392.90*	
		For Each Anchoring Into Dirt, Add Per Each Anchor	*238.22*	
		For Each Anchoring Into Asphalt Or Concrete, Add Per Each Anchor	*332.35*	
		For Knockdown, Add	*2,401.66*	
01 52 13 00-0014	MO	30' x 30' Modular Office, With Toilet	867.19	
		For Each Delivery And Removal, Two Round Trips, Add	*4,585.58*	
		For Each Set-Up (Block And Level), Add	*2,392.90*	
		For Each Anchoring Into Dirt, Add Per Each Anchor	*238.22*	
		For Each Anchoring Into Asphalt Or Concrete, Add Per Each Anchor	*332.35*	
		For Knockdown, Add	*2,401.66*	

01 52 13 00-0015 Accessories For Field Office Trailers *(01 52 13)*
Note: Costs includes installation or placement in trailer.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 52 13 00-0016	MO	Desk For Field Office Trailer	42.28	
01 52 13 00-0017	MO	Rolling Desk Chair For Field Office Trailer	26.42	
01 52 13 00-0018	MO	File Cabinet For Field Office Trailer	31.71	
01 52 13 00-0019	MO	Table For Field Office Trailer	21.14	
01 52 13 00-0020	MO	Folding Chair For Field Office Trailer	10.01	
01 52 13 00-0021	EA	Phone Hook-Up For Field Office Trailer	116.26	
01 52 13 00-0022	MO	Local Hardwired Phone or Data Service Per Phone Line For Field Office Trailer	84.55	
01 52 13 00-0023	MO	Security System With Monitoring For Field Office Trailer	133.21	
01 52 13 00-0024	LF	Perimeter Trailer Vinyl Skirting For Field Office Trailer	16.59	
01 52 13 00-0025	LF	Insulated Perimeter Trailer Vinyl Skirting For Field Office Trailer	39.29	
01 52 13 00-0026	MO	Steps For Field Office Trailer	73.37	
01 52 13 00-0027	MO	Steps With Canopy For Field Office Trailer	122.54	
01 52 13 00-0028	MO	Fax Machine For Field Office Trailer	45.30	
01 52 13 00-0029	MO	Copier For Field Office Trailer	84.55	

01 52 13 00-0030 Storage Containers *(01 52 13)*

01 52 13 00-0031	MO	8' x 8' x 10' Storage Container	144.00	
		For Each Delivery And Removal, Two Round Trips, Add	*120.17*	
		For >12 Months, Deduct	*-32.40*	
01 52 13 00-0032	MO	8' x 8' x 20' Storage Container	150.55	
		For Each Delivery And Removal, Two Round Trips, Add	*132.19*	
		For >12 Months, Deduct	*-33.87*	
01 52 13 00-0033	MO	8' x 8' x 40' Storage Container	178.04	
		For Each Delivery And Removal, Two Round Trips, Add	*266.23*	
		For >12 Months, Deduct	*-40.06*	

01 52 19 Sanitary Facilities *(01 52)*

01 52 19 00-0001 Portable Toilets *(01 52 19)*

Note: Includes servicing once per week (unless task states otherwise).

01 52 19 00-0002	WK	Portable Chemical Toilet	65.49	
		For Each Additional Servicing Per Unit Per Week, Add	*25.00*	
		For Each Delivery And Set-up, Add	*31.57*	
01 52 19 00-0003	MO	Portable Chemical Toilet	196.48	
		For Each Additional Servicing Per Unit Per Week, Add	*25.00*	
		For Each Delivery And Set-up, Add	*31.57*	
01 52 19 00-0004	WK	Americans With Disabilities Act Compliant Portable Chemical Toilet	78.12	
		For Each Additional Servicing Per Unit Per Week, Add	*25.00*	
		For Each Delivery And Set-up, Add	*31.57*	
01 52 19 00-0005	MO	Americans With Disabilities Act Compliant Portable Chemical Toilet	229.23	
		For Each Additional Servicing Per Unit Per Week, Add	*25.00*	
		For Each Delivery And Set-up, Add	*31.57*	
01 52 19 00-0006	WK	Two Station Portable Handwash	57.87	
		For Each Delivery And Set-up, Add	*31.57*	
01 52 19 00-0007	MO	Two Station Portable Handwash	175.53	
		For Each Delivery And Set-up, Add	*31.57*	
01 52 19 00-0008	MO	6 Station, Portable Toilets, Multi Trailer	6,431.04	
		Note: Includes women's room (3 toilets, 2 sinks) and men's room (1 toilet, 1 urinal and 1 sink). Excludes servicing.		
		For Each Delivery, Set-up And Removal, Two Round Trips, Add	*1,281.92*	
01 52 19 00-0009	WK	Service 6 Station Trailer Restrooms, 3 Times Per Week	2,158.86	
		For One Additional Service Per Week, Add	*719.62*	
		Note: For one less service per week, UOM to be negative one (-1)		

01 53 Temporary Construction *(01 50)*

01 53 16 Temporary Decking *(01 53)*

01 53 16 00-0001 Temporary Walkways And Railings *(01 53 16)*

Note: Includes removal after use.

01 53 16 00-0002	SF	Temporary Wood Walkway, 3/4" Plywood On 2 x 6 Stringers	8.80	
01 53 16 00-0003	LF	Temporary Wooden Guardrail, 42" High, Posts, Handrail, And Intermediate Rail	40.26	
01 53 16 00-0004	LF	Temporary Wood Guardrail Base, 12" x 12" Timber Beam	16.26	
01 53 16 00-0005	RSR	Temporary Wood Stairs, Tread And Riser On 2" x 12" Stringers	30.02	

01 53 23 Temporary Ramps *(01 53)*

01 53 23 00-0001 Temporary Plywood For Wheel Barrow Access *(01 53 23)*

Note: Includes removal after use.

01 53 23 00-0002	SF	Temporary Plywood For Wheel Barrow Access	1.90	0.61

01 54 Construction Aids *(01 50)*

01 54 09 Personnel Protection Equipment *(01 54)*

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

01 54 09 00-0001 **Personnel Protection Equipment** *(01 54 09)*

Note: Personnel Protection Equipment (PPE) for workers safety is considered as part of the Contractor's and Workers responisibility. Includes, but are not limited to; protective work gloves, hearing protection, protective clothing, reflective vests, safety glasses or face shields, dust masks, hard hats, appropriate foot protection (slip resistant, puncture-resistant soles, safety-toed), safety harnesses with lifeline, etc. Review JOC Note and specifications for requirements.

01 54 09 00-0002	NTE	Personnel Protection Equipment Note: For specification publishing. Review specifications for requirements.	0.00	

01 54 23 Temporary Scaffolding and Platforms *(01 54)*

01 54 23 00-0001 **Scaffolding** *(01 54 23)*

Note: Additional scaffolding rental for work above the normal working height.

01 54 23 00-0002 **Scaffolding Rental - Rental Only** *(01 54 23 00-0001)*

Note: Monthly rental of actual scaffolding volume rented. Scaffolding is complete with bracing, 2" thick x 12" wide scaffolding planks, scaffolding stairs (where necessary in lieu of planks), standard accessories, base leveling devices, mud sills, climbing ladders and landings, brackets, clamps and building ties, etc. See CSI section 01 54 23 00-0006 for scaffolding erection and dismantling.

01 54 23 00-0003	CCF	Scaffolding With Bracing Accessories, Area Based On 5' Wide Sections, Per CCF / Month	44.55	
		For Up To 25, Add	*17.82*	
		For >25 To 50, Add	*11.14*	
		For >50 To 150, Add	*4.46*	
01 54 23 00-0004	CCF	Scaffolding With Bracing Accessories, Area Based On 4' Wide Sections, Per CCF / Month	50.10	
		For Up To 25, Add	*20.04*	
		For >25 To 50, Add	*12.53*	
		For >50 To 150, Add	*5.01*	
01 54 23 00-0005	CCF	Scaffolding With Bracing Accessories, Area Based On 3' Wide Sections, Per CCF / Month	66.83	
		For Up To 25, Add	*26.73*	
		For >25 To 50, Add	*16.71*	
		For >50 To 150, Add	*6.68*	

01 54 23 00-0006 **Scaffolding Erection And Dismantling - Labor Only** *(01 54 23 00-0001)*

Note: Includes both initial erection and final dismantling Excludes lifting equipment. The unit of measure is the volume of scaffolding erected. See CSI section 01 54 23 00-0002 for scaffolding rental.

01 54 23 00-0007	CCF	Up To 20' Height Scaffolding Initial Erection And Final Dismantling, Per CCF Of Scaffolding And Accessories	54.67	
01 54 23 00-0008	CCF	>20' To 40' Height Scaffolding Initial Erection And Final Dismantling, Per CCF Of Scaffolding And Accessories	71.69	
01 54 23 00-0009	CCF	>40' To 60' Height Scaffolding Initial Erection And Final Dismantling, Per CCF Of Scaffolding And Accessories	95.67	
01 54 23 00-0010	CCF	>60' To 80' Height Scaffolding Initial Erection And Final Dismantling, Per CCF Of Scaffolding And Accessories	105.24	
01 54 23 00-0011	CCF	>80' Height Scaffolding Initial Erection And Final Dismantling, Per CCF Of Scaffolding And Accessories	121.19	
01 54 23 00-0012	CCF	Up To 20' Height Scaffolding Initial Erection And Final Dismantling Set-up On Stairs, Per CCF Of Scaffolding And Accessories	76.54	

01 54 23 00-0013 **Heavy-Duty Masonry Scaffolding Rental - Rental Only** *(01 54 23 00-0001)*

Note: Monthly rental of actual scaffolding volume rented. For projects over 2 stories. Scaffolding is complete with bracing, 2" thick x 12" wide scaffolding planks, scaffolding stairs (where necessary in lieu of planks), standard accessories, base leveling devices, mud sills, climbing ladders and landings, brackets, clamps, flat plate, connectors and building ties, etc. See CSI section 01 54 23 00-0019 for erection.

01 54 23 00-0014	CCF	Heavy-Duty Masonry Scaffolding With Bracing Accessories, Area Based On 4' Wide Sections, Per CCF / Month	72.22	
01 54 23 00-0015	CCF	Heavy-Duty Masonry Scaffolding With Bracing Accessories, Area Based On 2' Wide Sections, Per CCF / Month	132.41	
01 54 23 00-0016	LF	Aluminum Joists, Per LF / Month	11.74	
01 54 23 00-0017	LF	Aluminum Stringers, Per LF / Month	16.84	
01 54 23 00-0018	EA	Screw Jack With U-Plate For Stringers, Per EA / Month	21.22	

01 54 23 00-0019 **Heavy-Duty Masonry Scaffolding Erection And Dismantling - Labor Only** *(01 54 23 00-0001)*

Note: Includes both initial erection and final dismantling Excludes lifting equipment. The unit of measure is the volume of scaffolding erected. See CSI section 01 54 23 00-0013 for scaffolding rental.

01 54 23 00-0020	CCF	Up To 20' Height Heavy-Duty Masonry Scaffolding Initial Erection And Final Dismantling, Per CCF Of Scaffolding And Accessories.	102.05	
01 54 23 00-0021	CCF	>20' To 40' Height Heavy-Duty Masonry Scaffolding Initial Erection And Final Dismantling, Per CCF Of Scaffolding And Accessories.	127.56	
01 54 23 00-0022	CCF	>40' To 60' Height Heavy-Duty Scaffolding Initial Erection And Final Dismantling, Per CCF Of Scaffolding And Accessories.	153.08	
01 54 23 00-0023	CCF	>60' To 80' Height Heavy-Duty Scaffolding Initial Erection And Final Dismantling, Per CCF Of Scaffolding And Accessories.	165.84	
01 54 23 00-0024	CCF	>80' Height Heavy-Duty Scaffolding Initial Erection And Final Dismantling, Per CCF Of Scaffolding And Accessories.	184.97	

01 54 23 00-0025 **Scaffolding Accessories** *(01 54 23 00-0001)*

See CSI section 01 54 23 00-0019 for erection.

01 54 23 00-0026	CSF	Netting for Exterior Building Scaffolding Note: Includes removal after use.	45.21	

01 54 23 00-0027 **Mobile Mast Climbing Scaffolding** *(01 54 23)*

Note: Per month.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

01 54 23 00-0028 Fraco FRSM ACT Solution Single Mast, Mast Climbing Scaffolding Per Month *(01 54 23 00-0027)*

01 54 23 00-0029	MO	Single Mast Climber, 175' High Mast x 35' Wide Platform	3,300.00	
01 54 23 00-0030	EA	Delivery/Pick-up Fee For Single Mast Climber Note: Excludes erection or dismantle.	2,400.00	
01 54 23 00-0031	EA	Erection For Single Mast Climber	3,000.00	
01 54 23 00-0032	EA	Dismantle For Single Mast Climber	2,500.00	
01 54 23 00-0033	SF	Additional Scaffolding Planks, Wood, 2"	0.99	

01 54 23 00-0034 Rolling Scaffolding *(01 54 23)*

Note: Includes moving and relocating scaffolding on site. Excludes initial erection and final dismantling of scaffold.

01 54 23 00-0035	DAY	>14' To 20' Height, 5' Wide X 7' Long Section, Rolling Scaffolding, Complete With Wheels, Railings, etc.	14.33	
01 54 23 00-0036	WK	>14' To 20' Height, 5' Wide X 7' Long Section, Rolling Scaffolding, Complete With Wheels, Railings, etc.	57.42	
01 54 23 00-0037	MO	>14' To 20' Height, 5' Wide X 7' Long Section, Rolling Scaffolding, Complete With Wheels, Railings, etc.	229.65	
01 54 23 00-0038	DAY	>20' To 40' Height, 5' Wide X 7' Long Section, Rolling Scaffolding, Complete With Wheels, Railings, etc.	23.99	
01 54 23 00-0039	WK	>20' To 40' Height, 5' Wide X 7' Long Section, Rolling Scaffolding, Complete With Wheels, Railings, etc.	96.07	
01 54 23 00-0040	MO	>20' To 40' Height, 5' Wide X 7' Long Section, Rolling Scaffolding, Complete With Wheels, Railings, etc.	384.33	
01 54 23 00-0041	EA	>14' To 20', Rolling Scaffolding Initial Erection And Final Dismantling For Each Scaffold	119.80	
01 54 23 00-0042	EA	>20' To 40', Rolling Scaffolding Initial Erection And Final Dismantling For Each Scaffold	149.75	

01 54 23 00-0043 Shoring Posts *(01 54 23)*

01 54 23 00-0044	DAY	6'-6" To 11' Extension, 5,000 Lb. Capacity, Steel Shoring Post	2.21	
01 54 23 00-0045	WK	6'-6" To 11' Extension, 5,000 Lb. Capacity, Steel Shoring Post	8.82	
01 54 23 00-0046	MO	6'-6" To 11' Extension, 5,000 Lb. Capacity, Steel Shoring Post	26.47	
01 54 23 00-0047	EA	Initial Erection And Final Dismantling For Each Shoring Post	9.59	
		For >20 To 50, Deduct	*-1.44*	
		For >50 To 100, Deduct	*-3.36*	
		For >100, Deduct	*-5.27*	

01 54 23 00-0048 Temporary Lumber, Single Use *(01 54 23)*

Note: Includes removal after use.

01 54 23 00-0049	SF	5/16" CD Grade Plywood, Temporary Lumber	3.00	
01 54 23 00-0050	SF	1/2" CD Grade Plywood, Temporary Lumber	3.38	
01 54 23 00-0051	SF	5/8" CD Grade Plywood, Temporary Lumber	3.73	
01 54 23 00-0052	SF	3/4" CD Grade Plywood, Temporary Lumber	4.09	
01 54 23 00-0053	SF	1" CD Grade Plywood, Temporary Lumber	5.96	
01 54 23 00-0054	LF	2" x 4" Temporary Lumber	3.42	
01 54 23 00-0055	LF	2" x 6" Temporary Lumber	4.22	
01 54 23 00-0056	LF	2" x 8" Temporary Lumber	5.03	
01 54 23 00-0057	LF	2" x 10" Temporary Lumber	5.84	
01 54 23 00-0058	LF	2" x 12" Temporary Lumber	6.66	
01 54 23 00-0059	LF	3" x 8" Temporary Lumber	6.66	
01 54 23 00-0060	LF	3" x 10" Temporary Lumber	7.86	
01 54 23 00-0061	LF	3" x 12" Temporary Lumber	9.09	
01 54 23 00-0062	LF	4" x 4" Temporary Lumber	4.33	
01 54 23 00-0063	LF	4" x 6" Temporary Lumber	6.03	
01 54 23 00-0064	LF	6" x 6" Temporary Lumber	7.74	
01 54 23 00-0065	LF	6" x 8" Temporary Lumber	9.98	
01 54 23 00-0066	LF	12" x 12" Temporary Lumber	22.87	

01 54 23 00-0067 Temporary Precast Concrete Blocks *(01 54 23)*

Note: Includes removal after use.

01 54 23 00-0068	EA	2' x 2' x 2' Temporary Precast Concrete (Ecology) Block Note: Includes removal after use.	130.13	
01 54 23 00-0069	EA	2' x 2' x 4' Temporary Precast Concrete (Ecology) Block Note: Includes removal after use.	162.67	
01 54 23 00-0070	EA	2' x 2' x 8' Temporary Precast Concrete (Ecology) Block Note: Includes removal after use.	212.79	

01 54 26 Temporary Swing Staging *(01 54)*

Note: Up to one month rental. Includes connection to existing electrical outlet on roof, all necessary safety equipment for personnel and anchoring to existing roof anchors. Excludes installing roof anchors.

01 54 26 00-0001 Swing Stage *(01 54 26)*

Note: Up to one month rental. Includes connection to existing electrical outlet on roof, and all necessary safety equipment for personnel. Excludes installing roof anchors.

01 54 26 00-0002	MO	7' Swing Stage, Electric Operated	3,174.68	
01 54 26 00-0003	MO	10' Swing Stage, Electric Operated	3,333.41	
01 54 26 00-0004	MO	14' Swing Stage, Electric Operated	3,492.14	
01 54 26 00-0005	MO	20' Swing Stage, Electric Operated	3,650.88	
01 54 26 00-0006	MO	24' Swing Stage, Electric Operated	3,809.61	
01 54 26 00-0007	MO	30' Swing Stage, Electric Operated	3,968.35	
01 54 26 00-0008	MO	42' Swing Stage, Electric Operated	4,127.08	
01 54 26 00-0009	MO	12' Swing Stage, Manually Operated	915.47	
01 54 26 00-0010	MO	24' Swing Stage, Manually Operated	1,144.33	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 54 26 00-0011	EA	Swing Stage Platform From Hooks, Erection And Dismantling Note: Includes both initial erection and final dismantling of platform. Excludes anchors or temporary roof mounted outrigger system.	5,107.01	
01 54 26 00-0012	EA	Swing Stage Platform And Temporary Roof Mounted Outrigger System Erection And Dismantling Note: Includes both initial erection and final dismantling of temporary roof mounted outrigger system.	7,097.07	
01 54 26 00-0013	EA	Move Swing Stage Platform From Hooks To Different Location At Same Roof	2,685.38	
01 54 26 00-0014	EA	Move Swing Stage Platform and Temporary Roof Mounted Outrigger System To Different Location At Same Roof	3,740.34	

01 55 Vehicular Access and Parking *(01 50)*

01 55 23 Temporary Roads *(01 55)*

01 55 23 00-0001 Temporary Stabilized Construction Entrance *(01 55 23)*

Note: As per Caltrans detail.

01 55 23 00-0002	EA	Temporary Stabilized Construction Entrance Assembly Note: Includes excavation of 30' x 14' x 6" deep pit, filter fabric at base and sides, filled with 3" rock, and compaction.	2,110.79	
01 55 23 00-0003	SF	3" To 4" Rock Temporary Stabilized Construction Entrance Assembly Note: Includes up to 12" excavation of pit, hauling and disposal of soil, filter fabric at base and sides, filled with rock, and compaction.	4.59	
01 55 23 00-0004	SF	>4" To 6" Rock Temporary Stabilized Construction Entrance Assembly Note: Includes up to 12" excavation of pit, hauling and disposal of soil, filter fabric at base and sides, filled with rock, and compaction.	5.61	

01 55 23 00-0005 Rumble Trench Plate *(01 55 23)*

01 55 23 00-0006	MO	8' x 10' Steel Rumble Trench Plate Rental	424.02	
01 55 23 00-0007	EA	Placement And Removal Of Rumble Plate Note: If lifting equipment is not available on site, See CSI section 01 22 23 00-0000 for rentals tasks, 01 71 13 00-0000 for mobilization tasks.	105.11	
01 55 23 00-0008	EA	Relocate And Adjust Location Of Rumble Plate Note: If lifting equipment is not available on site, See CSI section 01 22 23 00-0000 for rentals tasks, 01 71 13 00-0000 for mobilization tasks.	26.28	

01 55 23 00-0009 Temporary Road Ramps (Godwin) *(01 55 23)*

Note: Excludes asphalt and gravel.

01 55 23 00-0010	EA	4" Diameter Pipeline, 12' Passable Vehicle Width, Temporary Road Ramp (Godwin)	5,213.11	237.44
01 55 23 00-0011	EA	6" Diameter Pipeline, 12' Passable Vehicle Width, Temporary Road Ramp (Godwin)	7,098.63	356.16
01 55 23 00-0012	EA	8" Diameter Pipeline, 12' Passable Vehicle Width, Temporary Road Ramp (Godwin)	9,808.19	474.88
01 55 23 00-0013	EA	12" Diameter Pipeline, 12' Passable Vehicle Width, Temporary Road Ramp (Godwin)	20,346.13	593.61
01 55 23 00-0014	EA	24" Diameter Pipeline, 15' Passable Vehicle Width, Temporary Road Ramp (Godwin)	29,854.02	712.32

01 55 26 Traffic Control *(01 55)*

01 55 26 00-0001 Temporary Removable Preformed Traffic Black Line Mask *(01 55 26)*

Note: Includes installation and removal after use.

01 55 26 00-0002	LF	6" Removable Traffic Black Line Mask	5.55	
01 55 26 00-0003	LF	8" Removable Traffic Black Line Mask	6.70	

01 55 26 00-0004 Temporary Preformed Traffic Line Tape *(01 55 26)*

Note: Includes installation and removal after use.

01 55 26 00-0005	LF	4" Reflective Removable Traffic Line Tape	5.61	
01 55 26 00-0006	LF	6" Reflective Removable Traffic Line Tape	7.65	
01 55 26 00-0007	LF	8" Reflective Removable Traffic Line Tape	9.59	

01 55 26 00-0008 Temporary Painted Traffic Lines *(01 55 26)*

Note: Includes installation and removal after use.

01 55 26 00-0009	LF	4" Temporary Painted Traffic Lines Note: Includes removal after use	2.57	
		For Not Removed, Deduct	*-1.77*	
01 55 26 00-0010	LF	6" Temporary Painted Traffic Lines Note: Includes removal after use	3.39	
		For Not Removed, Deduct	*-2.41*	
01 55 26 00-0011	LF	8" Temporary Painted Traffic Lines Note: Includes removal after use	4.24	
		For Not Removed, Deduct	*-3.05*	
01 55 26 00-0012	EA	2" High x 2" Wide Temporary Overlay Pavement Markers, "L" With Factory-Applied Adhesive Pad	3.44	
01 55 26 00-0013	EA	2" High x 4" Wide Temporary Overlay Pavement Markers, "L" With Factory-Applied Adhesive Pad	3.48	
01 55 26 00-0014	EA	2" High x 4" Wide Temporary Reflective Pavement Markers, "L" With Factory-Applied Adhesive Pad	3.54	
01 55 26 00-0015	EA	2" High x 4" Wide Chip Seal Markers, Double Cover, "L" With Factory-Applied Adhesive Pad	3.65	
01 55 26 00-0016	EA	Temporary Channelizer 3' High, 2-1/4" Diameter Flexible Delineator, 3" x 12" Retroreflective Flat Top, Soil Embedded With Surface Mount Note: Remove after use.	101.23	

01 55 26 00-0017 Temporary Pedestrian Traffic Control *(01 55 26)*

01 55 26 00-0018	CLF	1", 4 Mil Polyethylene Printed Barricade Tape, Fluorescent Orange	11.64	
01 55 26 00-0019	CLF	2", 4 Mil Polyethylene Printed Barricade Tape, Fluorescent Orange	15.28	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 55 26 00-0020	CLF	3/4", 4 Mil Polyethylene Printed Barricade Tape, Fluorescent Yellow	9.04	
01 55 26 00-0021	CLF	2", 4 Mil Polyethylene Printed Barricade Tape, Fluorescent Yellow	11.11	
01 55 26 00-0022	CLF	3", 4 Mil Polyethylene Printed Barricade Tape, Non-Fluorescent	12.13	
01 55 26 00-0023	CLF	6", 4 Mil Polyethylene Printed Barricade Tape, Non-Fluorescent	16.73	
01 55 26 00-0024	CLF	1" Exterior Vinyl Warning Tape	13.88	
01 55 26 00-0025	CLF	2" Exterior Vinyl Warning Tape	19.52	
01 55 26 00-0026	CLF	3" Exterior Vinyl Warning Tape	24.61	
01 55 26 00-0027	CLF	4" Exterior Vinyl Warning Tape	28.78	
01 55 26 00-0028		Linear Delineation System, Temporary Or Permanent *(01 55 26)*		
		Note: High visibility reflective sheeting strips. Scotchlite as manufactured by 3M.		
01 55 26 00-0029	LF	4" Linear Delineation System	12.01	
01 55 26 00-0030	LF	6" Linear Delineation System	16.25	
01 55 26 00-0031		Temporary Traffic Protection *(01 55 26)*		
01 55 26 00-0032		Temporary Portable Traffic Control Device Usage *(01 55 26 00-0031)*		
		Note: Excludes placing and removing devices. See CSI section 01 55 26 00-0138 for Initial delivery, placement and final removal of temporary traffic devices, 01 55 26 00-0154 for daily (or as needed) placement and removal of temporary traffice devices.		
01 55 26 00-0033	DAY	28" Cone With Reflective Collar	0.91	
01 55 26 00-0034	WK	28" Cone With Reflective Collar	2.73	
01 55 26 00-0035	MO	28" Cone With Reflective Collar	8.19	
01 55 26 00-0036	DAY	Vertical Panel	2.75	
01 55 26 00-0037	WK	Vertical Panel	8.25	
01 55 26 00-0038	MO	Vertical Panel	24.75	
01 55 26 00-0039	DAY	Channelizer Drum	2.99	
01 55 26 00-0040	WK	Channelizer Drum	8.96	
01 55 26 00-0041	MO	Channelizer Drum	26.87	
01 55 26 00-0042	DAY	Stackable Channelizer Panel	1.41	
01 55 26 00-0043	WK	Stackable Channelizer Panel	4.24	
01 55 26 00-0044	MO	Stackable Channelizer Panel	12.71	
01 55 26 00-0045	DAY	Type I Barricade, Up To 3' Wide With Reflective Rail Each Side	1.95	
01 55 26 00-0046	WK	Type I Barricade, Up To 3' Wide With Reflective Rail Each Side	5.86	
01 55 26 00-0047	MO	Type I Barricade, Up To 3' Wide With Reflective Rail Each Side	17.59	
01 55 26 00-0048	DAY	Type II Barricade, Up To 3' Wide With Two Reflective Rails Each Side	4.33	
01 55 26 00-0049	WK	Type II Barricade, Up To 3' Wide With Two Reflective Rails Each Side	13.00	
01 55 26 00-0050	MO	Type II Barricade, Up To 3' Wide With Two Reflective Rails Each Side	39.00	
01 55 26 00-0051	DAY	Type III Barricade, Up To 5' Wide With Three Reflective Rails	4.94	
01 55 26 00-0052	WK	Type III Barricade, Up To 5' Wide With Three Reflective Rails	14.81	
01 55 26 00-0053	MO	Type III Barricade, Up To 5' Wide With Three Reflective Rails	44.44	
01 55 26 00-0054	DAY	Type III Barricade, >5' To 10' Wide With Three Reflective Rails	9.03	
01 55 26 00-0055	WK	Type III Barricade, >5' To 10' Wide With Three Reflective Rails	27.10	
01 55 26 00-0056	MO	Type III Barricade, >5' To 10' Wide With Three Reflective Rails	81.30	
01 55 26 00-0057	DAY	Up To 10' Wide A Frame Barricade	4.95	
01 55 26 00-0058	WK	Up To 10' Wide A Frame Barricade	14.86	
01 55 26 00-0059	MO	Up To 10' Wide A Frame Barricade	44.59	
01 55 26 00-0060	DAY	Type A Or C Flasher	1.01	
01 55 26 00-0061	WK	Type A Or C Flasher	3.03	
01 55 26 00-0062	MO	Type A Or C Flasher	9.09	
01 55 26 00-0063	DAY	Type B High Intensity Flasher	5.48	
01 55 26 00-0064	WK	Type B High Intensity Flasher	16.43	
01 55 26 00-0065	MO	Type B High Intensity Flasher	49.30	
01 55 26 00-0066		Temporary Traffic Barriers Usage *(01 55 26 00-0031)*		
		Note: Excludes placing and removing devices. See CSI section 01 55 26 00-0138 for delivery, placing and removal.		
01 55 26 00-0067	DAY	6' Long Portable Parking Curbs	2.36	
01 55 26 00-0068	WK	6' Long Portable Parking Curbs	7.08	
01 55 26 00-0069	MO	6' Long Portable Parking Curbs	21.23	
01 55 26 00-0070	DAY	6' Long Portable Speed Bumps	6.98	
01 55 26 00-0071	WK	6' Long Portable Speed Bumps	20.95	
01 55 26 00-0072	MO	6' Long Portable Speed Bumps	62.84	
01 55 26 00-0073	DAY	8' To 12.5' Concrete Traffic Barrier	16.77	
01 55 26 00-0074	WK	8' To 12.5' Concrete Traffic Barrier	50.32	
01 55 26 00-0075	MO	8' To 12.5' Concrete Traffic Barrier	150.96	
01 55 26 00-0076	DAY	>12.5' To 20' Concrete Traffic Barrier	33.55	
01 55 26 00-0077	WK	>12.5' To 20' Concrete Traffic Barrier	100.64	
01 55 26 00-0078	MO	>12.5' To 20' Concrete Traffic Barrier	301.92	
01 55 26 00-0079	DAY	6' x 32" Tall Plastic Water Barrier	20.03	
01 55 26 00-0080	WK	6' x 32" Tall Plastic Water Barrier	60.09	
01 55 26 00-0081	MO	6' x 32" Tall Plastic Water Barrier	180.27	
01 55 26 00-0082	DAY	6' x 46" Tall Plastic Water Barrier	28.60	
01 55 26 00-0083	WK	6' x 46" Tall Plastic Water Barrier	85.80	
01 55 26 00-0084	MO	6' x 46" Tall Plastic Water Barrier	257.41	
01 55 26 00-0085	DAY	Sand Filled Crash Attenuator Barrels	11.19	
01 55 26 00-0086	WK	Sand Filled Crash Attenuator Barrels	33.58	
01 55 26 00-0087	MO	Sand Filled Crash Attenuator Barrels	100.75	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 55 26 00-0088	MO	24" Wide x 32" High x 32' Long, Anchorless Water Filler, Non-Redirective, Bi-Directional Impact Attenuator (ABSORB 350® BARRIER) Note: Consists of 8 bays with nose piece at the front of the system.	1,588.72	

01 55 26 00-0089 Temporary Portable Signs And Message Displays Usage *(01 55 26 00-0031)*

Note: Excludes placing and removing devices. See CSI section 01 55 26 00-0138 for delivery, placing and removal.

01 55 26 00-0090	DAY	Mesh Or Vinyl Roll-up Sign With Stand	8.79	
01 55 26 00-0091	WK	Mesh Or Vinyl Roll-up Sign With Stand	26.37	
01 55 26 00-0092	MO	Mesh Or Vinyl Roll-up Sign With Stand	79.10	
01 55 26 00-0093	DAY	18" x 18" Aluminum Construction Sign, With Portable Stand	3.45	
01 55 26 00-0094	WK	18" x 18" Aluminum Construction Sign, With Portable Stand	10.35	
01 55 26 00-0095	MO	18" x 18" Aluminum Construction Sign, With Portable Stand	31.05	
01 55 26 00-0096	DAY	30" x 24" Aluminum Construction Sign, With Portable Stand	4.79	
01 55 26 00-0097	WK	30" x 24" Aluminum Construction Sign, With Portable Stand	14.37	
01 55 26 00-0098	MO	30" x 24" Aluminum Construction Sign, With Portable Stand	43.10	
01 55 26 00-0099	DAY	30" x 30" Aluminum Construction Sign, With Portable Stand	4.24	
01 55 26 00-0100	WK	30" x 30" Aluminum Construction Sign, With Portable Stand	12.72	
01 55 26 00-0101	MO	30" x 30" Aluminum Construction Sign, With Portable Stand	38.16	
01 55 26 00-0102	DAY	48" x 18" Aluminum Construction Sign, With Portable Stand	5.24	
01 55 26 00-0103	WK	48" x 18" Aluminum Construction Sign, With Portable Stand	15.71	
01 55 26 00-0104	MO	48" x 18" Aluminum Construction Sign, With Portable Stand	47.14	
01 55 26 00-0105	DAY	48" x 24" Aluminum Construction Sign, With Portable Stand	6.14	
01 55 26 00-0106	WK	48" x 24" Aluminum Construction Sign, With Portable Stand	18.41	
01 55 26 00-0107	MO	48" x 24" Aluminum Construction Sign, With Portable Stand	55.22	
01 55 26 00-0108	DAY	48" x 30" Aluminum Construction Sign, With Portable Stand	7.03	
01 55 26 00-0109	WK	48" x 30" Aluminum Construction Sign, With Portable Stand	21.10	
01 55 26 00-0110	MO	48" x 30" Aluminum Construction Sign, With Portable Stand	63.30	
01 55 26 00-0111	DAY	48" x 36" Aluminum Construction Sign, With Portable Stand	7.93	
01 55 26 00-0112	WK	48" x 36" Aluminum Construction Sign, With Portable Stand	23.79	
01 55 26 00-0113	MO	48" x 36" Aluminum Construction Sign, With Portable Stand	71.38	
01 55 26 00-0114	DAY	48" x 48" Aluminum Construction Sign, With Portable Stand	9.73	
01 55 26 00-0115	WK	48" x 48" Aluminum Construction Sign, With Portable Stand	29.18	
01 55 26 00-0116	MO	48" x 48" Aluminum Construction Sign, With Portable Stand	87.55	
01 55 26 00-0117	DAY	60" x 24" Aluminum Construction Sign, With Portable Stand	9.58	
01 55 26 00-0118	WK	60" x 24" Aluminum Construction Sign, With Portable Stand	28.73	
01 55 26 00-0119	MO	60" x 24" Aluminum Construction Sign, With Portable Stand	86.20	
01 55 26 00-0120	DAY	60" x 30" Aluminum Construction Sign, With Portable Stand	10.70	
01 55 26 00-0121	WK	60" x 30" Aluminum Construction Sign, With Portable Stand	32.10	
01 55 26 00-0122	MO	60" x 30" Aluminum Construction Sign, With Portable Stand	96.30	
01 55 26 00-0123	DAY	60" x 36" Aluminum Construction Sign, With Portable Stand	11.82	
01 55 26 00-0124	WK	60" x 36" Aluminum Construction Sign, With Portable Stand	35.47	
01 55 26 00-0125	MO	60" x 36" Aluminum Construction Sign, With Portable Stand	106.40	
01 55 26 00-0126	DAY	Aluminum Sign And Post	4.97	
01 55 26 00-0127	WK	Aluminum Sign And Post	14.91	
01 55 26 00-0128	MO	Aluminum Sign And Post	44.74	
01 55 26 00-0129	DAY	Trailer Mounted Flashing Arrow Board	183.67	
01 55 26 00-0130	WK	Trailer Mounted Flashing Arrow Board	508.37	
01 55 26 00-0131	MO	Trailer Mounted Flashing Arrow Board	1,344.72	
01 55 26 00-0132	DAY	Trailer Mounted Portable Variable Message Sign (PVMS)	304.65	
01 55 26 00-0133	WK	Trailer Mounted Portable Variable Message Sign (PVMS)	812.40	
01 55 26 00-0134	MO	Trailer Mounted Portable Variable Message Sign (PVMS)	1,624.80	
01 55 26 00-0135	DAY	Two Head, Trailer Mounted Traffic Signal System, Per Set Of Two Note: Consists of a set of two communicating trailers. Each with two LED traffic light head, solar panels and a battery bank, mounted on a heavy-duty towable trailer.	1,495.13	
01 55 26 00-0136	WK	Two Head, Trailer Mounted Traffic Signal System, Per Set Of Two Note: Consists of a set of two communicating trailers. Each with two LED traffic light head, solar panels and a battery bank, mounted on a heavy-duty towable trailer.	4,485.39	
01 55 26 00-0137	MO	Two Head, Trailer Mounted Traffic Signal System, Per Set Of Two Note: Consists of a set of two communicating trailers. Each with two LED traffic light head, solar panels and a battery bank, mounted on a heavy-duty towable trailer.	13,456.17	

01 55 26 00-0138 Initial Delivery, Placement And Final Removal From Site Of Temporary Traffic Protection Using Truck *(01 55 26 00-0031)*

Note: Includes delivery and return up to 15 miles. See CSI section 01 55 26 00-0154 for daily (or as needed) placement and removal of temporary traffice devices, 01 74 19 00-0039 for delivery >15 miles.

01 55 26 00-0139	EA	Initial Delivery, Placement And Final Removal From Site Of Up To 250 Temporary Traffic Cones Using Truck	4.13	
01 55 26 00-0140	EA	Initial Delivery, Placement And Final Removal From Site Of >250 Temporary Traffic Cones Using Truck	3.62	
01 55 26 00-0141	EA	Initial Delivery, Placement And Final Removal From Site Of Up To 250 Temporary Traffic Panels/Channelizers Using Truck	6.81	
01 55 26 00-0142	EA	Initial Delivery, Placement And Final Removal From Site Of >250 Temporary Traffic Panels/Channelizers Using Truck	5.67	
01 55 26 00-0143	EA	Initial Delivery, Placement And Final Removal From Site Of Up To 250 Temporary Traffic Barricades Using Truck	10.32	
01 55 26 00-0144	EA	Initial Delivery, Placement And Final Removal From Site Of >250 Temporary Traffic Barricades Using Truck	8.26	
01 55 26 00-0145	EA	Initial Delivery, Placement And Final Removal From Site Of Temporary Traffic Curbs/Speed Bumps Using Truck	10.32	
01 55 26 00-0146	EA	Initial Delivery, Placement And Final Removal From Site Of Temporary Traffic Portable Sign And Stand Using Truck	6.19	
01 55 26 00-0147	EA	Initial Delivery, Placement And Final Removal From Site Of Temporary Traffic Aluminum Sign And Post Using Truck	25.80	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 55 26 00-0148	EA	Initial Delivery, Placement And Final Removal From Site Of Temporary Traffic Trailer Mounted Boards And Signals Using Truck	77.40	
01 55 26 00-0149	EA	Initial Delivery, Placement And Final Removal From Site Of Temporary 8' To 12.5' Concrete Traffic Barrier Note: If lifting equipment is not available on site, See CSI section 01 22 23 00-0000 for rentals tasks, 01 71 13 00-0000 for mobilization tasks.	105.11	
		For 1 Barrier, Add	*262.78*	
		For 2 Barriers, Add	*94.60*	
		For 3 Barriers, Add	*31.53*	
01 55 26 00-0150	EA	Initial Delivery, Placement And Final Removal From Site Of Temporary >12.5' To 20' Concrete Traffic Barrier Note: If lifting equipment is not available on site, See CSI section 01 22 23 00-0000 for rentals tasks, 01 71 13 00-0000 for mobilization tasks.	157.67	
		For 1 Barrier, Add	*394.18*	
		For 2 Barriers, Add	*141.90*	
		For 3 Barriers, Add	*47.30*	
01 55 26 00-0151	EA	Initial Delivery, Placement And Final Removal From Site Of Temporary Traffic Plastic Water Barrier Note: Includes additional water as needed. If lifting equipment is not available on site, See CSI section 01 22 23 00-0000 for rental tasks, 01 71 13 00-0000 for mobilization tasks.	60.21	
		For 1 Barrier, Add	*131.38*	
		For 2 Barriers, Add	*47.30*	
		For 3 Barriers, Add	*15.77*	
01 55 26 00-0152	EA	Initial Delivery, Placement And Final Removal From Site Of Temporary Traffic Crash Attenuator Barrels Note: If lifting equipment is not available on site, See CSI section 01 22 23 00-0000 for rentals tasks, 01 71 13 00-0000 for mobilization tasks.	78.83	
		For 1 Barrier, Add	*197.08*	
		For 2 Barriers, Add	*70.95*	
		For 3 Barriers, Add	*23.65*	
01 55 26 00-0153	EA	Initial Delivery, Placement And Final Removal From Site Of Temporary Traffic 24" Wide x 32" High x 32' Long, Anchorless Water Filler, Non-Redirective, Bi-Directional Impact Attenuator (ABSORB 350® BARRIER) Note: Consists of 8 bays with nose piece at the front of the system attached and anchored in accordance with the manufactures instructuions. Includes water. If lifting equipment is not available on site, See CSI section 01 22 23 00-0000 for rental tasks, 01 71 13 00-0000 for mobilization.	578.11	

01 55 26 00-0154 Placement And Remove Temporary Traffic Protection From Roadside Or Work Area (Daily Or As Required) *(01 55 26 00-0031)*

01 55 26 00-0155	EA	Placement And Removal Of Up To 250 Temporary Traffic Cones By Hand From Roadside Or Work Area	2.58	
01 55 26 00-0156	EA	Placement And Removal Of >250 Temporary Traffic Cones By Hand From Roadside Or Work Area	2.07	
01 55 26 00-0157	EA	Placement And Removal Of Up To 250 Temporary Traffic Panels/Channelizers By Hand From Roadside Or Work Area	3.44	
01 55 26 00-0158	EA	Placement And Removal Of >250 Temporary Traffic Panels/Channelizers By Hand From Roadside Or Work Area	2.74	
01 55 26 00-0159	EA	Placement And Removal Of Up To 250 Temporary Traffic Barricades By Hand From Roadside Or Work Area	5.16	
01 55 26 00-0160	EA	Placement And Removal Of >250 Temporary Traffic Barricades By Hand From Roadside Or Work Area	4.13	
01 55 26 00-0161	EA	Placement And Removal Of Temporary Traffic Portable Sign And Stand From Roadside Or Work Area	3.08	
01 55 26 00-0162	EA	Placement And Removal Of Temporary Traffic Trailer Mounted Boards And Signals From Roadside Or Work Area	38.71	
01 55 26 00-0163	EA	Relocation Of Temporary Traffic Concrete Traffic Barrier From Roadside Or Work Area Note: Excludes flatbed truck. If lifting equipment is not available on site, See CSI section 01 22 23 00-0000 for rental tasks, 01 71 13 00-0000 for mobilization.	52.55	

01 55 26 00-0164 Place And Remove Temporary Signs For Detours *(01 55 26 00-0031)*

01 55 26 00-0165 Temporary Reflectorized Signs For Detours *(01 55 26 00-0164)*

Note: Excludes posts.

01 55 26 00-0166 Temporary Aluminum Engineer Grade Stop Signs For Detours *(01 55 26 00-0165)*

01 55 26 00-0167	EA	Temporary 18" x 18" Aluminum Engineer Grade Stop Sign For Detours	98.71	
		For Hi-Intensity Grade, Add	*10.19*	
		For Diamond Grade, Add	*19.37*	
01 55 26 00-0168	EA	Temporary 18" x 24" Aluminum Engineer Grade Stop Sign For Detours	112.77	
		For Hi-Intensity Grade, Add	*13.33*	
		For Diamond Grade, Add	*25.33*	
01 55 26 00-0169	EA	Temporary 24" x 24" Aluminum Engineer Grade Stop Sign For Detours	121.60	
		For Hi-Intensity Grade, Add	*20.36*	
		For Diamond Grade, Add	*32.29*	
01 55 26 00-0170	EA	Temporary 30" x 30" Aluminum Engineer Grade Stop Sign For Detours	139.14	
		For Hi-Intensity Grade, Add	*7.63*	
		For Diamond Grade, Add	*41.35*	
01 55 26 00-0171	EA	Temporary 36" x 36" Aluminum Engineer Grade Stop Sign For Detours	181.06	
		For Hi-Intensity Grade, Add	*22.43*	
		For Diamond Grade, Add	*70.34*	

01 55 26 00-0172 Other Temporary Reflectorized Traffic Signs For Detours *(01 55 26 00-0165)*

Note: Other traffic signs includes reserve, handicap, visitor, no parking, property, speed limit, tow away, ADA, parking time limit, parking exclusive area, school, traffic/caution, etc. Excludes posts.

01 55 26 00-0173 Temporary Aluminum Engineer Grade Traffic Signs For Detours *(01 55 26 00-0172)*

01 55 26 00-0174	EA	Temporary 6" x 12" Aluminum Engineer Grade Traffic Sign For Detours	65.96	
		For Hi-Intensity Grade, Add	*2.53*	
01 55 26 00-0175	EA	Temporary 6" x 18" Aluminum Engineer Grade Traffic Sign For Detours	70.17	
		For Hi-Intensity Grade, Add	*3.79*	
01 55 26 00-0176	EA	Temporary 9" x 12" Aluminum Engineer Grade Traffic Sign For Detours	70.17	
		For Hi-Intensity Grade, Add	*3.79*	
01 55 26 00-0177	EA	Temporary 9" x 15" Aluminum Engineer Grade Traffic Sign For Detours	73.32	
		For Hi-Intensity Grade, Add	*4.73*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 55 26 00-0178	EA	Temporary 9" x 18" Aluminum Engineer Grade Traffic Sign For Detours	76.48	
		For Hi-Intensity Grade, Add	*5.68*	
01 55 26 00-0179	EA	Temporary 9" x 24" Aluminum Engineer Grade Traffic Sign For Detours	86.39	
		For Hi-Intensity Grade, Add	*7.58*	
01 55 26 00-0180	EA	Temporary 9" x 48" Aluminum Engineer Grade Traffic Sign For Detours	111.65	
		For Hi-Intensity Grade, Add	*15.15*	
01 55 26 00-0181	EA	Temporary 12" x 12" Aluminum Engineer Grade Traffic Sign For Detours	74.38	
		For Hi-Intensity Grade, Add	*5.05*	
01 55 26 00-0182	EA	Temporary 12" x 18" Aluminum Engineer Grade Traffic Sign For Detours	86.39	
		For Hi-Intensity Grade, Add	*7.58*	
01 55 26 00-0183	EA	Temporary 12" x 24" Aluminum Engineer Grade Traffic Sign For Detours	94.81	
		For Hi-Intensity Grade, Add	*10.10*	
01 55 26 00-0184	EA	Temporary 12" x 30" Aluminum Engineer Grade Traffic Sign For Detours	103.23	
		For Hi-Intensity Grade, Add	*12.63*	
01 55 26 00-0185	EA	Temporary 12" x 36" Aluminum Engineer Grade Traffic Sign For Detours	111.65	
		For Hi-Intensity Grade, Add	*15.15*	
01 55 26 00-0186	EA	Temporary 18" x 18" Aluminum Engineer Grade Traffic Sign For Detours	99.02	
		For Hi-Intensity Grade, Add	*11.36*	
01 55 26 00-0187	EA	Temporary 18" x 24" Aluminum Engineer Grade Traffic Sign For Detours	111.65	
		For Hi-Intensity Grade, Add	*15.15*	
01 55 26 00-0188	EA	Temporary 18" x 30" Aluminum Engineer Grade Traffic Sign For Detours	127.87	
		For Hi-Intensity Grade, Add	*18.94*	
01 55 26 00-0189	EA	Temporary 18" x 36" Aluminum Engineer Grade Traffic Sign For Detours	140.49	
		For Hi-Intensity Grade, Add	*22.73*	
01 55 26 00-0190	EA	Temporary 18" x 54" Aluminum Engineer Grade Traffic Sign For Detours	192.76	
		For Hi-Intensity Grade, Add	*34.09*	
01 55 26 00-0191	EA	Temporary 24" x 24" Aluminum Engineer Grade Traffic Sign For Detours	132.08	
		For Hi-Intensity Grade, Add	*20.21*	
01 55 26 00-0192	EA	Temporary 24" x 30" Aluminum Engineer Grade Traffic Sign For Detours	148.91	
		For Hi-Intensity Grade, Add	*25.25*	
01 55 26 00-0193	EA	Temporary 24" x 36" Aluminum Engineer Grade Traffic Sign For Detours	165.75	
		For Hi-Intensity Grade, Add	*30.31*	
01 55 26 00-0194	EA	Temporary 24" x 42" Aluminum Engineer Grade Traffic Sign For Detours	196.97	
		For Hi-Intensity Grade, Add	*35.36*	
01 55 26 00-0195	EA	Temporary 24" x 48" Aluminum Engineer Grade Traffic Sign For Detours	213.81	
		For Hi-Intensity Grade, Add	*40.41*	
01 55 26 00-0196	EA	Temporary 24" x 54" Aluminum Engineer Grade Traffic Sign For Detours	230.65	
		For Hi-Intensity Grade, Add	*45.46*	
01 55 26 00-0197	EA	Temporary 30" x 30" Aluminum Engineer Grade Traffic Sign For Detours	169.96	
		For Hi-Intensity Grade, Add	*31.57*	
01 55 26 00-0198	EA	Temporary 30" x 36" Aluminum Engineer Grade Traffic Sign For Detours	205.39	
		For Hi-Intensity Grade, Add	*37.88*	
01 55 26 00-0199	EA	Temporary 30" x 42" Aluminum Engineer Grade Traffic Sign For Detours	226.44	
		For Hi-Intensity Grade, Add	*44.20*	
01 55 26 00-0200	EA	Temporary 30" x 48" Aluminum Engineer Grade Traffic Sign For Detours	261.87	
		For Hi-Intensity Grade, Add	*50.51*	
01 55 26 00-0201	EA	Temporary 30" x 60" Aluminum Engineer Grade Traffic Sign For Detours	318.34	
		For Hi-Intensity Grade, Add	*63.14*	
01 55 26 00-0202	EA	Temporary 36" x 36" Aluminum Engineer Grade Traffic Sign For Detours	230.65	
		For Hi-Intensity Grade, Add	*45.46*	
01 55 26 00-0203	EA	Temporary 36" x 42" Aluminum Engineer Grade Traffic Sign For Detours	270.29	
		For Hi-Intensity Grade, Add	*53.03*	
01 55 26 00-0204	EA	Temporary 36" x 48" Aluminum Engineer Grade Traffic Sign For Detours	309.93	
		For Hi-Intensity Grade, Add	*60.61*	
01 55 26 00-0205	EA	Temporary 36" x 54" Aluminum Engineer Grade Traffic Sign For Detours	335.18	
		For Hi-Intensity Grade, Add	*68.19*	
01 55 26 00-0206	EA	Temporary 36" x 60" Aluminum Engineer Grade Traffic Sign For Detours	374.82	
		For Hi-Intensity Grade, Add	*75.76*	
01 55 26 00-0207	EA	Temporary 36" x 73" Aluminum Engineer Grade Traffic Sign For Detours	443.93	
		For Hi-Intensity Grade, Add	*92.18*	
01 55 26 00-0208	EA	Temporary 36" x 78" Aluminum Engineer Grade Traffic Sign For Detours	464.98	
		For Hi-Intensity Grade, Add	*98.49*	
01 55 26 00-0209	EA	Temporary 36" x 108" Aluminum Engineer Grade Traffic Sign For Detours	612.83	
		For Hi-Intensity Grade, Add	*136.37*	
01 55 26 00-0210	EA	Temporary 42" x 42" Aluminum Engineer Grade Traffic Sign For Detours	314.13	
		For Hi-Intensity Grade, Add	*61.87*	
01 55 26 00-0211	EA	Temporary 48" x 48" Aluminum Engineer Grade Traffic Sign For Detours	391.66	
		For Hi-Intensity Grade, Add	*80.81*	
01 55 26 00-0212	EA	Temporary 48" x 54" Aluminum Engineer Grade Traffic Sign For Detours	439.72	
		For Hi-Intensity Grade, Add	*90.92*	
01 55 26 00-0213	EA	Temporary 48" x 60" Aluminum Engineer Grade Traffic Sign For Detours	473.40	
		For Hi-Intensity Grade, Add	*101.02*	
01 55 26 00-0214	EA	Temporary 48" x 66" Aluminum Engineer Grade Traffic Sign For Detours	528.65	
		For Hi-Intensity Grade, Add	*111.12*	
01 55 26 00-0215	EA	Temporary 48" x 72" Aluminum Engineer Grade Traffic Sign For Detours	562.32	
		For Hi-Intensity Grade, Add	*121.22*	
01 55 26 00-0216	EA	Temporary 48" x 84" Aluminum Engineer Grade Traffic Sign For Detours	644.05	
		For Hi-Intensity Grade, Add	*141.43*	
01 55 26 00-0217	EA	Temporary 48" x 96" Aluminum Engineer Grade Traffic Sign For Detours	711.39	
		For Hi-Intensity Grade, Add	*161.63*	
01 55 26 00-0218	EA	Temporary 48" x 102" Aluminum Engineer Grade Traffic Sign For Detours	745.06	
		For Hi-Intensity Grade, Add	*171.73*	
01 55 26 00-0219	EA	Temporary 48" x 108" Aluminum Engineer Grade Traffic Sign For Detours	785.93	
		For Hi-Intensity Grade, Add	*181.83*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 55 26 00-0220	EA	Temporary 60" x 72" Aluminum Engineer Grade Traffic Sign For Detours	677.72	
		For Hi-Intensity Grade, Add	*151.53*	
01 55 26 00-0221	EA	Temporary 78" x 96" Aluminum Engineer Grade Traffic Sign For Detours	1,055.31	
		For Hi-Intensity Grade, Add	*262.65*	
01 55 26 00-0222		Temporary Overhead Sign Structures For Detours *(01 55 26 00-0164)*		
		Note: Including horizontal Z-bars.		
01 55 26 00-0223	SF	From 30 To 360 SF Signs For Temporary Overhead Sign Structures For Detours	22.50	
		For Over 10' High, Add	*13.00*	
01 55 26 00-0224		Temporary Sign Posts For Detours *(01 55 26 00-0164)*		
		Note: Excludes sign.		
01 55 26 00-0225		Temporary U-Channel Sign Posts For Detours *(01 55 26 00-0224)*		
		Note: Excludes digging and concrete.		
01 55 26 00-0226		Temporary Baked Enamel U-Channel Sign Posts For Detours *(01 55 26 00-0225)*		
01 55 26 00-0227	EA	Temporary 3' To 4' Baked Enamel U-Channel Sign Post Base For Detours	87.81	
01 55 26 00-0228	EA	Temporary 6' Baked Enamel U-Channel Sign Post For Detours	114.31	
01 55 26 00-0229	EA	Temporary 7' Baked Enamel U-Channel Sign Post For Detours	136.60	
01 55 26 00-0230	EA	Temporary 8' Baked Enamel U-Channel Sign Post For Detours	159.85	
01 55 26 00-0231	EA	Temporary 10' Baked Enamel U-Channel Sign Post For Detours	193.09	
01 55 26 00-0232	EA	Temporary 12' Baked Enamel U-Channel Sign Post For Detours	205.09	
01 55 26 00-0233		Temporary Galvanized Steel U-Channel Sign Posts For Detours *(01 55 26 00-0225)*		
01 55 26 00-0234	EA	Temporary 3' To 4' Galvanized Steel U-Channel Sign Post Base For Detours	93.80	
01 55 26 00-0235	EA	Temporary 6' Galvanized Steel U-Channel Sign Post For Detours	123.81	
01 55 26 00-0236	EA	Temporary 7' Galvanized Steel U-Channel Sign Post For Detours	158.10	
01 55 26 00-0237	EA	Temporary 8' Galvanized Steel U-Channel Sign Post For Detours	183.61	
01 55 26 00-0238	EA	Temporary 10' Galvanized Steel U-Channel Sign Post For Detours	210.39	
01 55 26 00-0239	EA	Temporary 12' Galvanized Steel U-Channel Sign Post For Detours	220.14	
01 55 26 00-0240		Temporary Fiberglass Or Composite Plastic U-Channel Sign Posts For Detours *(01 55 26 00-0225)*		
01 55 26 00-0241	EA	Temporary 3' To 4' Fiberglass Or Composite Plastic U-Channel Sign Post Base For Detours	86.40	
01 55 26 00-0242	EA	Temporary 6' Fiberglass Or Composite Plastic U-Channel Sign Post For Detours	111.23	
01 55 26 00-0243	EA	Temporary 7' Fiberglass Or Composite Plastic U-Channel Sign Post For Detours	132.89	
01 55 26 00-0244	EA	Temporary 8' Fiberglass Or Composite Plastic U-Channel Sign Post For Detours	155.43	
01 55 26 00-0245	EA	Temporary 10' Fiberglass Or Composite Plastic U-Channel Sign Post For Detours	185.07	
01 55 26 00-0246	EA	Temporary 12' Fiberglass Or Composite Plastic U-Channel Sign Post For Detours	200.34	
01 55 26 00-0247		Temporary Tubular Sign Posts For Detours *(01 55 26 00-0224)*		
		Note: Excludes digging and concrete.		
01 55 26 00-0248		Temporary 2-3/8" Diameter, Galvanized Steel Tubular Sign Post For Detours *(01 55 26 00-0247)*		
01 55 26 00-0249	EA	Temporary 6', 2-3/8" Diameter, Galvanized Steel Tubular Sign Post For Detours	124.79	
01 55 26 00-0250	EA	Temporary 7', 2-3/8" Diameter, Galvanized Steel Tubular Sign Post For Detours	148.34	
01 55 26 00-0251	EA	Temporary 8', 2-3/8" Diameter, Galvanized Steel Tubular Sign Post For Detours	174.90	
01 55 26 00-0252	EA	Temporary 10', 2-3/8" Diameter, Galvanized Steel Tubular Sign Post For Detours	223.39	
01 55 26 00-0253	EA	Temporary 12', 2-3/8" Diameter, Galvanized Steel Tubular Sign Post For Detours	242.16	
01 55 26 00-0254		Temporary Square Sign Posts For Detours *(01 55 26 00-0224)*		
		Note: Excludes digging and concrete.		
01 55 26 00-0255		Temporary Galvanized Steel Square Sign Posts For Detours *(01 55 26 00-0254)*		
01 55 26 00-0256	EA	Temporary 3' To 4' Galvanized Steel Square Sign Post Base For Detours	95.13	
01 55 26 00-0257	EA	Temporary 6' Galvanized Steel Square Sign Post For Detours	146.32	
01 55 26 00-0258	EA	Temporary 7' Galvanized Steel Square Sign Post For Detours	172.10	
01 55 26 00-0259	EA	Temporary 8' Galvanized Steel Square Sign Post For Detours	200.75	
01 55 26 00-0260	EA	Temporary 10' Galvanized Steel Square Sign Post For Detours	244.97	
01 55 26 00-0261	EA	Temporary 12' Galvanized Steel Square Sign Post For Detours	263.71	
01 55 26 00-0262		Temporary Breakaway Sign Posts And Bases For Detours *(01 55 26 00-0164)*		
		Note: For breakaway post systems, base posts are driven in, sign posts bolted to base post using lap splice hardware kit. Excludes sign.		
01 55 26 00-0263		Temporary 2.5 Lb./LF Breakaway Sign Posts And Base Posts For Detours *(01 55 26 00-0262)*		
01 55 26 00-0264		Temporary Base Posts, 2.5 Lb./LF, For Breakaway Sign Posts For Detours *(01 55 26 00-0263)*		
01 55 26 00-0265	EA	Temporary Base Post for 2.5 Lb./LF, Breakaway Sign Post For Detours	108.83	
01 55 26 00-0266	EA	Temporary Lap Splice Hardware For 2.5 Lb./LF, Breakaway Sign Post For Detours	68.08	
01 55 26 00-0267		Temporary Breakaway Sign Posts, 2.5 Lb./LF For Detours *(01 55 26 00-0263)*		

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 55 26 00-0268	LF	Temporary Breakaway Sign Post, 2.5 Lb./LF For Detours	12.72	
01 55 26 00-0269		Temporary 4 Lb./LF Breakaway Sign Posts And Base Posts For Detours *(01 55 26 00-0262)*		
01 55 26 00-0270		Temporary Base Posts, 4 Lb./LF, For Breakaway Sign Posts For Detours *(01 55 26 00-0269)*		
01 55 26 00-0271	EA	Temporary Base Post for 4 Lb./LF, Breakaway Sign Post For Detours	112.40	
01 55 26 00-0272	EA	Temporary Lap Splice Hardware for 4 Lb./LF, Breakaway Sign Post For Detours	68.08	
01 55 26 00-0273		Temporary Breakaway Sign Posts, 4 Lb./LF For Detours *(01 55 26 00-0269)*		
01 55 26 00-0274	LF	Temporary Breakaway Sign Post, 4 Lb./LF For Detours	14.93	
01 55 26 00-0275		Temporary Driven Sign Posts For Detours *(01 55 26 00-0262)*		
01 55 26 00-0276		Temporary Driven Posts, 2.5 Lb./LF For Detours *(01 55 26 00-0275)*		
01 55 26 00-0277	LF	Temporary Driven Post, 2.5 Lb./LF For Detours	14.63	
		For Each Soil Plate, Add	*3.00*	
01 55 26 00-0278		Temporary Driven Posts, 4 Lb./LF For Detours *(01 55 26 00-0275)*		
01 55 26 00-0279	LF	Temporary Driven Post, 4 Lb./LF For Detours	17.81	
		For Each Soil Plate, Add	*3.00*	
01 55 26 00-0280		Temporary Omni-Directional Breakaway System For Sign Posts And Light Poles For Detours *(01 55 26 00-0262)*		
01 55 26 00-0281		Temporary Omni-Directional Breakaway Systems For Signs For Detours *(01 55 26 00-0280)*		
		Note: Break-Safe as manufactured by Transpo Industries. Organized by post type and size. Includes hinges, anchors, all associated parts and drilling.		
01 55 26 00-0282	EA	Temporary Omni-Directional Breakaway System For 6" To 8" Wide Flange (Tramspo B525)	1,221.01	
01 55 26 00-0283	EA	Temporary Omni-Directional Breakaway System For 10" To 21" Wide Flange (Tramspo B650)	1,301.19	
01 55 26 00-0284	EA	Temporary Omni-Directional Breakaway System For Standard I Beam Or W6x9 Flange (Tramspo AI4 And AI6)	892.03	
01 55 26 00-0285	EA	Temporary Omni-Directional Breakaway System For 3" To 4.5" Outside Diameter Pipe (Tramspo A3 And A4.5)	781.30	
01 55 26 00-0286	EA	Temporary Omni-Directional Breakaway System For Square Tube (Tramspo AS3 And AS4)	885.90	
01 55 26 00-0287	EA	Temporary Omni-Directional Breakaway System For U-Channels (Tramspo AU4 To AU6)	842.83	
01 55 26 00-0288	EA	Temporary Omni-Directional Breakaway System For U-Channels Embedded (Tramspo AUX4 To AUX6)	792.34	
01 55 26 00-0289		Temporary Omni-Directional Breakaway Systems For Poles For Detours *(01 55 26 00-0280)*		
		Note: Pole-Safe As Manufactured By Transpo Industries. Organized by bolt size. Includes four couplings, all associated parts, drilling and can be for new or for retrofitting existing poles.		
01 55 26 00-0290	EA	Temporary Omni-Directional Breakaway System For Poles With 5/8" Couplings	437.62	
01 55 26 00-0291	EA	Temporary Omni-Directional Breakaway System For Poles With 3/4" Couplings	458.86	
01 55 26 00-0292	EA	Temporary Omni-Directional Breakaway System For Poles With 1" Couplings	476.49	
01 55 26 00-0293	EA	Temporary Omni-Directional Breakaway System For Poles With 1 1/4" Couplings	723.51	
01 55 26 00-0294	EA	Temporary Skirt For Omni-Directional Breakaway System For Poles With Bolt Circle Diameter Of 10" To Less Than 15"	63.53	
01 55 26 00-0295	EA	Temporary Skirt For Omni-Directional Breakaway System For Poles With Bolt Circle Diameter Of 15" To 20"	84.71	
01 55 26 00-0296		Temporary Rumble Strips *(01 55 26)*		
		Note: Includes removal after use.		
01 55 26 00-0297	LF	1/4" High, 4" Wide, Polymer Tape Temporary Rumble Strip	14.34	
01 55 26 00-0298	LF	1/2" High, 3-1/2" Wide, Polycarbonate Temporary Rumble Strip	10.31	

01 56 Temporary Barriers and Enclosures *(01 50)*

Note: Includes removal after use.

01 56 16 Temporary Dust Barriers *(01 56)*

01 56 16 00-0001		Temporary Sheeting For Protection *(01 56 16)*		
		Note: Includes removal after use.		
01 56 16 00-0002	SF	4 Mil, Plastic Sheeting, Applied To Floors	0.37	
01 56 16 00-0003	SF	4 Mil, Plastic Sheeting, Applied To Walls	0.49	
01 56 16 00-0004	SF	4 Mil, Plastic Sheeting, Applied To Ceilings	0.66	
01 56 16 00-0005	SF	4 Mil, Fire Retardant, Plastic Sheeting, Applied To Floors	0.40	
01 56 16 00-0006	SF	4 Mil, Fire Retardant, Plastic Sheeting, Applied To Walls	0.52	
01 56 16 00-0007	SF	4 Mil, Fire Retardant, Plastic Sheeting, Applied To Ceilings	0.69	
01 56 16 00-0008	SF	6 Mil, Plastic Sheeting, Applied To Floors Note: Includes removal after use.	0.41	
01 56 16 00-0009	SF	6 Mil, Plastic Sheeting, Applied To Walls Note: Includes removal after use.	0.53	
01 56 16 00-0010	SF	6 Mil, Plastic Sheeting, Applied To Ceilings Note: Includes removal after use.	0.70	
01 56 16 00-0011	SF	6 Mil, Plastic Sheeting, Applied To Scaffolding Note: Includes removal after use.	0.69	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 56 16 00-0012	SF	6 Mil, Fire Retardant, Plastic Sheeting, Applied To Floors Note: Includes removal after use.	0.49	
01 56 16 00-0013	SF	6 Mil, Fire Retardant, Plastic Sheeting, Applied To Walls Note: Includes removal after use.	0.61	
01 56 16 00-0014	SF	6 Mil, Fire Retardant, Plastic Sheeting, Applied To Ceilings Note: Includes removal after use.	0.78	
01 56 16 00-0015	SF	6 Mil, Fire Retardant, Plastic Sheeting, Applied To Scaffolding Note: Includes removal after use.	0.73	
01 56 16 00-0016	SF	10 Mil, Fire Retardant, Reinforced, Plastic Sheeting, Applied To Scaffolding Note: Includes removal after use.	0.95	
01 56 16 00-0017	SF	6 Mil, Fire Retardant, Anti-static, Plastic Sheeting, Applied To Floors Note: Includes removal after use.	0.52	
01 56 16 00-0018	SF	6 Mil, Fire Retardant, Anti-static, Plastic Sheeting, Applied To Walls Note: Includes removal after use.	0.64	
01 56 16 00-0019	SF	6 Mil, Fire Retardant, Anti-static, Plastic Sheeting, Applied To Ceilings Note: Includes removal after use.	0.81	
01 56 16 00-0020	SF	6 Mil, Fire Retardant, Anti-static, Plastic Sheeting, Applied To Scaffolding Note: Includes removal after use.	0.76	
01 56 16 00-0021	SF	6 Mil, Reinforced, Plastic Sheeting, Applied To Floors Note: Includes removal after use.	0.51	
01 56 16 00-0022	SF	6 Mil, Reinforced, Plastic Sheeting, Applied To Walls Note: Includes removal after use.	0.63	
01 56 16 00-0023	SF	6 Mil, Reinforced, Plastic Sheeting, Applied To Ceilings Note: Includes removal after use.	0.80	
01 56 16 00-0024	SF	6 Mil, Reinforced, Plastic Sheeting, Applied To Scaffolding Note: Includes removal after use.	0.75	
01 56 16 00-0025	SF	6 Mil, Fire Retardant, Reinforced, Plastic Sheeting, Applied To Floors Note: Includes removal after use.	0.58	
01 56 16 00-0026	SF	6 Mil, Fire Retardant, Reinforced, Plastic Sheeting, Applied To Walls Note: Includes removal after use.	0.70	
01 56 16 00-0027	SF	6 Mil, Fire Retardant, Reinforced, Plastic Sheeting, Applied To Ceilings Note: Includes removal after use.	0.87	
01 56 16 00-0028	SF	6 Mil, Fire Retardant, Reinforced, Plastic Sheeting, Applied To Scaffolding Note: Includes removal after use.	0.82	
01 56 16 00-0029		Temporary Canvas For Protection *(01 56 16)* Note: Includes removal after use.		
01 56 16 00-0030	SF	Heavy-Duty Woven Water Repellant Canvas, Applied To Walls	1.09	
01 56 16 00-0031		Accessories For Temporary Sheeting *(01 56 16)* Note: Includes removal after use.		
01 56 16 00-0032	EA	7' Zipper Door For Plastic Sheeting Note: Includes removal after use.	26.28	
01 56 16 00-0033	LF	Zip Wall Kit And ICRA Dust Control Awareness Barrier (Per LF Of Wall) Note: Includes up to 12' long spring loaded poles, side clamps, foam rails and 6 mil poly barrier. Excludes zip doors. Includes removal after use.	10.41	
01 56 16 00-0034		Magnetic Barriers For Temporary Sheeting *(01 56 16)*		
01 56 16 00-0035	EA	Magnetic Dust Barrier Door System For Plastic Sheeting Note: Multi use. Excludes spring poles and magnetic strips.	28.10	
01 56 16 00-0036	EA	29" To 50", Dust Barrier Spring Pole For Door System Note: Multi use.	7.62	
01 56 16 00-0037	EA	Magnetic Strip For Door System Note: Multi use.	3.95	
01 56 16 00-0038		Temporary Critical Barriers For Protection *(01 56 16)* Note: Includes removal after use. See CSI section 02 89 00 00-0002 for Other barriers for infectious control.		
01 56 16 00-0039	EA	Up To 1 SF Individual Critical Barriers For Outlets And Receptacles Note: Includes removal after use.	14.44	
01 56 16 00-0040	EA	>1 To 4 SF Individual Critical Barriers For Diffusers, Ceiling Speakers, Return Grilles, etc. Note: Includes removal after use.	21.89	
01 56 16 00-0041	EA	>4 To 8 SF Individual Critical Barriers For Diffusers, Return Grilles, Access Doors, Light Fixtures, etc. Note: Includes removal after use.	29.40	
01 56 16 00-0042	EA	>8 To 32 SF Individual Critical Barriers For Doors, Windows, etc. Note: Includes removal after use.	45.78	
01 56 16 00-0043		Temporary Stud Wall *(01 56 16)* Note: Includes removal after use.		
01 56 16 00-0044		Temporary Stud Wall With Drywall *(01 56 16 00-0043)* Note: Includes 2 x 4 wood studs installed 16" on center, single bottom and top plate, appropriate fastening devices, drywall taped and finished and removal after use. Excludes paint.		
01 56 16 00-0045		Temporary Stud Wall With Drywall *(01 56 16 00-0044)*		
01 56 16 00-0046	SF	3/8" Gypsum Board On One Side, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	7.62	
		For Metal Studs 24" On Center, Add/Deduct	*1.28*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 56 16 00-0047	SF	1/2" Gypsum Board On One Side, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	7.62	
		For Metal Studs 24" On Center, Add/Deduct	*1.28*	
01 56 16 00-0048	SF	5/8" Gypsum Board On One Side, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	7.74	
		For Metal Studs 24" On Center, Add/Deduct	*1.28*	
01 56 16 00-0049	SF	3/8" Gypsum Board On Both Sides, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	10.58	
		For Metal Studs 24" On Center, Add/Deduct	*1.40*	
01 56 16 00-0050	SF	1/2" Gypsum Board On Both Sides, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	10.58	
		For Metal Studs 24" On Center, Add/Deduct	*1.40*	
01 56 16 00-0051	SF	5/8" Gypsum Board On Both Sides, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	10.83	
		For Metal Studs 24" On Center, Add/Deduct	*1.40*	

01 56 16 00-0052 Temporary Stud Wall With Fire Rated Drywall *(01 56 16 00-0044)*

01 56 16 00-0053	SF	1/2" Type C Fire Rated Gypsum Board On One Side, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	7.76	
		For Metal Studs 24" On Center, Add/Deduct	*1.28*	
01 56 16 00-0054	SF	5/8" Type C Fire Rated Gypsum Board On One Side, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	7.80	
		For Metal Studs 24" On Center, Add/Deduct	*1.28*	
01 56 16 00-0055	SF	5/8" Type X Fire Rated Gypsum Board On One Side, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	7.73	
		For Metal Studs 24" On Center, Add/Deduct	*1.28*	
01 56 16 00-0056	SF	3/4" Fire Rated (Sheetrock® Ultracode®) Gypsum Board On One Side, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	8.71	
		For Metal Studs 24" On Center, Add/Deduct	*1.28*	
01 56 16 00-0057	SF	1/2" Type C Fire Rated Gypsum Board On Both Sides, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	10.87	
		For Metal Studs 24" On Center, Add/Deduct	*1.40*	
01 56 16 00-0058	SF	5/8" Type C Fire Rated Gypsum Board On Both Sides, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	10.95	
		For Metal Studs 24" On Center, Add/Deduct	*1.40*	
01 56 16 00-0059	SF	5/8" Type X Fire Rated Gypsum Board On Both Sides, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	10.80	
		For Metal Studs 24" On Center, Add/Deduct	*1.40*	
01 56 16 00-0060	SF	3/4" Fire Rated (Sheetrock® Ultracode®) Gypsum Board On Both Sides, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	12.77	
		For Metal Studs 24" On Center, Add/Deduct	*1.40*	

01 56 16 00-0061 Temporary Stud Wall With Oriented Strand Board (OSB) *(01 56 16 00-0043)*

Note: Includes 2 x 4 wood studs installed 16" on center, single bottom and top plate, appropriate fastening devices, oriented strand board (OSB) wall sheathing, and removal after use. Excludes paint.

01 56 16 00-0062	SF	7/16" Oriented Strand Board (OSB) Wall Sheathing On One Side, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	7.44	
		For Metal Studs 24" On Center, Add/Deduct	*1.28*	
01 56 16 00-0063	SF	1/2" Oriented Strand Board (OSB) Wall Sheathing On One Side, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	7.49	
		For Metal Studs 24" On Center, Add/Deduct	*1.28*	
01 56 16 00-0064	SF	5/8" Oriented Strand Board (OSB) Wall Sheathing On One Side, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	7.64	
		For Metal Studs 24" On Center, Add/Deduct	*1.28*	
01 56 16 00-0065	SF	3/4" Oriented Strand Board (OSB) Wall Sheathing On One Side, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	7.73	
		For Metal Studs 24" On Center, Add/Deduct	*1.28*	
01 56 16 00-0066	SF	7/16" Oriented Strand Board (OSB) Wall Sheathing On Both Sides, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	10.23	
		For Metal Studs 24" On Center, Add/Deduct	*1.40*	
01 56 16 00-0067	SF	1/2" Oriented Strand Board (OSB) Wall Sheathing On Both Sides, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	10.33	
		For Metal Studs 24" On Center, Add/Deduct	*1.40*	
01 56 16 00-0068	SF	5/8" Oriented Strand Board (OSB) Wall Sheathing On Both Sides, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	10.63	
		For Metal Studs 24" On Center, Add/Deduct	*1.40*	
01 56 16 00-0069	SF	3/4" Oriented Strand Board (OSB) Wall Sheathing On Both Sides, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	10.80	
		For Metal Studs 24" On Center, Add/Deduct	*1.40*	

01 56 16 00-0070 Temporary Stud Wall With BC Plywood *(01 56 16 00-0043)*

Note: Includes 2 x 4 wood studs installed 16" on center, single bottom and top plate, appropriate fastening devices, interior/exterior BC plywood wall sheathing, and removal after use. Excludes paint.

01 56 16 00-0071	SF	3/8" BC Plywood Wall Sheathing On One Side, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	7.80	
		For Metal Studs 24" On Center, Add/Deduct	*1.28*	
01 56 16 00-0072	SF	1/2" BC Plywood Wall Sheathing On One Side, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	7.99	
		For Metal Studs 24" On Center, Add/Deduct	*1.28*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 56 16 00-0073	SF	5/8" BC Plywood Wall Sheathing On One Side, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	8.22	
		For Metal Studs 24" On Center, Add/Deduct	*1.28*	
01 56 16 00-0074	SF	3/4" BC Plywood Wall Sheathing On One Side, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	8.39	
		For Metal Studs 24" On Center, Add/Deduct	*1.28*	
01 56 16 00-0075	SF	3/8" BC Plywood Wall Sheathing On Both Sides, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	10.94	
		For Metal Studs 24" On Center, Add/Deduct	*1.40*	
01 56 16 00-0076	SF	1/2" BC Plywood Wall Sheathing On Both Sides, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	11.34	
		For Metal Studs 24" On Center, Add/Deduct	*1.40*	
01 56 16 00-0077	SF	5/8" BC Plywood Wall Sheathing On Both Sides, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	11.79	
		For Metal Studs 24" On Center, Add/Deduct	*1.40*	
01 56 16 00-0078	SF	3/4" BC Plywood Wall Sheathing On Both Sides, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	12.12	
		For Metal Studs 24" On Center, Add/Deduct	*1.40*	

01 56 16 00-0079 Temporary Stud Wall With Plastic Sheeting *(01 56 16 00-0043)*

Note: Includes 2 x 4 wood studs installed 16" on center, single bottom and top plate, appropriate fastening devices, 6 Mil plastic sheeting, and removal after use.

01 56 16 00-0080	SF	6 Mil, Plastic Sheeting On One Side, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	4.33	
		For Metal Studs 24" On Center, Add/Deduct	*1.14*	
01 56 16 00-0081	SF	6 Mil, Fire Retardant, Plastic Sheeting On One Side, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	4.41	
		For Metal Studs 24" On Center, Add/Deduct	*1.14*	
01 56 16 00-0082	SF	6 Mil, Fire Retardant, Anti-static, Plastic Sheeting On One Side, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	4.44	
		For Metal Studs 24" On Center, Add/Deduct	*1.14*	
01 56 16 00-0083	SF	6 Mil, Reinforced, Plastic Sheeting On One Side, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	4.43	
		For Metal Studs 24" On Center, Add/Deduct	*1.14*	
01 56 16 00-0084	SF	6 Mil, Fire Retardant, Reinforced, Plastic Sheeting On One Side, Temporary Wood Stud Wall, 16" On Center Note: Includes removal after use.	4.50	
		For Metal Studs 24" On Center, Add/Deduct	*1.14*	

01 56 16 00-0085 Temporary Doors *(01 56 16 00-0043)*

Note: For temporary stud walls. Includes removal after use.

01 56 16 00-0086	EA	Temporary Metal Door And Frame Note: Painted with panic hardware, lockset, threshold and smoke seals. Remove after use.	697.25	

01 56 16 00-0087 Temporary Floor Protection *(01 56 16)*

Note: Includes removal after use.

01 56 16 00-0088	SF	1/8" Thick, Masonite For Temporary Floor Protection Note: Includes removal after use.	1.96	
01 56 16 00-0089	SF	1/2" Thick, Plywood For Temporary Floor Protection Note: Includes removal after use.	2.07	
01 56 16 00-0090	SF	3/4" Thick, Plywood For Temporary Floor Protection Note: Includes removal after use.	2.33	
01 56 16 00-0091	LF	38" Wide, 46 Mil Fiberboard, Ram Board® For Temporary Floor Protection Note: Includes removal after use.	0.93	
01 56 16 00-0092	LF	36" Wide, 9 Mil, Regular Weight Red Rosin Paper, For Temporary Floor Protection Note: Includes removal after use.	0.36	
01 56 16 00-0093	CSF	3 Mil, Temporary Self-adhesive Carpet Protection Film Note: Includes removal after use.	28.82	
01 56 16 00-0094	SF	Burlap For Temporary Floor Protection Note: Includes removal after use.	0.78	
01 56 16 00-0095	LF	36" Wide, 10 Mil, Non-Flame Retardant, Leak-Proof, Dust-Free And Slip Resistant, Reusable Protective Floor Covering For Temporary Floor Protection Note: Includes removal after use.	0.65	
		For Seam Tape, Add Per LF	*0.28*	
01 56 16 00-0096	LF	36" Wide, 10 Mil, Flame Retardant, Leak-Proof, Dust-Free And Slip Resistant, Reusable Protective Floor Covering For Temporary Floor Protection Note: Includes removal after use.	0.76	
		For Seam Tape, Add Per LF	*0.28*	

01 56 16 00-0097 Sticky Mats *(01 56 16)*

Note: Includes removal after use.

01 56 16 00-0098	EA	18" x 36", 30 Layer Sticky Mat Note: Includes removal after use.	39.78	
		For 60 Layers Instead Of 30, Add	*26.24*	
01 56 16 00-0099	EA	18" x 46", 30 Layer Sticky Mat Note: Includes removal after use.	45.61	
		For 60 Layers Instead Of 30, Add	*30.61*	
01 56 16 00-0100	EA	24" x 36", 30 Layer Sticky Mat Note: Includes removal after use.	45.61	
		For 60 Layers Instead Of 30, Add	*30.61*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 56 16 00-0101	EA	25" x 45", 30 Layer Sticky Mat Note: Includes removal after use.	60.19	
		For 60 Layers Instead Of 30, Add	*41.54*	
01 56 16 00-0102	EA	36" x 36", 30 Layer Sticky Mat Note: Includes removal after use.	66.02	
		For 60 Layers Instead Of 30, Add	*45.92*	
01 56 16 00-0103	EA	36" x 46", 30 Layer Sticky Mat Note: Includes removal after use.	71.85	
		For 60 Layers Instead Of 30, Add	*50.29*	
01 56 16 00-0104	EA	36" x 60", 30 Layer Sticky Mat Note: Includes removal after use.	144.73	
		For 60 Layers Instead Of 30, Add	*104.95*	
01 56 16 00-0105	EA	36" x 72", 30 Layer Sticky Mat Note: Includes removal after use.	172.71	

01 56 16 00-0106 Temporary Panel Assembly Rentals (Edge Guard) *(01 56 16)*

01 56 16 00-0107 Barrier System Panels *(01 56 16 00-0106)*

Note: Panels are adjustable from 7'-8" to 10'-0" height and includes self-leveling floor channel, 1/4" foam gasket to conform to ceiling, edge gaskets, grid clips, and cam locks.

01 56 16 00-0108	WK	4' Panel Assembly Rental (Edge Guard 4000)	84.74	
01 56 16 00-0109	MO	4' Panel Assembly Rental (Edge Guard 4000)	388.57	
01 56 16 00-0110	WK	3' Panel Assembly Rental (Edge Guard 4001)	79.89	
01 56 16 00-0111	MO	3' Panel Assembly Rental (Edge Guard 4001)	370.41	
01 56 16 00-0112	WK	2' Panel Assembly Rental (Edge Guard 4002)	62.95	
01 56 16 00-0113	MO	2' Panel Assembly Rental (Edge Guard 4002)	292.34	
01 56 16 00-0114	WK	2' Panel Assembly With HEPA Filtered Air Discharge Port Rental (Edge Guard 4002.1)	111.69	
01 56 16 00-0115	MO	2' Panel Assembly With HEPA Filtered Air Discharge Port Rental (Edge Guard 4002.1)	515.06	
01 56 16 00-0116	WK	4' Panel Assembly Rental With 44" Door (Edge Guard 4003)	168.26	
01 56 16 00-0117	MO	4' Panel Assembly Rental With 44" Door (Edge Guard 4003)	775.33	
01 56 16 00-0118	WK	Hinged Corner Assembly Rental (Edge Guard 4004)	29.05	
01 56 16 00-0119	MO	Hinged Corner Assembly Rental (Edge Guard 4004)	130.73	
01 56 16 00-0120	WK	6" Panel Assembly Rental (Edge Guard 4005)	60.92	
01 56 16 00-0121	MO	6" Panel Assembly Rental (Edge Guard 4005)	282.45	
01 56 16 00-0122	WK	12" Panel Assembly Rental (Edge Guard 4006)	44.79	
01 56 16 00-0123	MO	12" Panel Assembly Rental (Edge Guard 4006)	205.18	
01 56 16 00-0124	WK	Outside Corner Post Rental (Edge Guard 4007)	24.21	
01 56 16 00-0125	MO	Outside Corner Post Rental (Edge Guard 4007)	108.94	
01 56 16 00-0126	WK	52" Panel Assembly Rental With 48" Door (Edge Guard 4008)	470.76	
01 56 16 00-0127	MO	52" Panel Assembly Rental With 48" Door (Edge Guard 4008)	2,171.01	
01 56 16 00-0128	WK	T Post Rental (Edge Guard 4009)	24.21	
01 56 16 00-0129	MO	T Post Rental (Edge Guard 4009)	108.94	
01 56 16 00-0130	WK	36" Panel Assembly Rental With 32" Door (Edge Guard 4010)	238.15	
01 56 16 00-0131	MO	36" Panel Assembly Rental With 32" Door (Edge Guard 4010)	1,279.35	

01 56 16 00-0132 Installation Of Barrier System Panels *(01 56 16 00-0106)*

Note: Includes removal after use.

01 56 16 00-0133	LF	Installation Of Panel Assembly Rental (Edge Guard) Note: Includes panels and corners	78.03	

01 56 26 Temporary Fencing *(01 56)*

01 56 26 00-0001 Temporary Fencing *(01 56 26)*

Note: Per ASTM A392-06 Standards

01 56 26 00-0002 Temporary Chain Link Fence *(01 56 26 00-0001)*

Note: Includes delivery, set-up (driving posts) and removal. Excludes auguring/drilling for posts.

01 56 26 00-0003 Temporary Chain Link Fence, Up To 6 Months *(01 56 26 00-0002)*

01 56 26 00-0004	LF	Temporary 4' High Chain Link Fence And Posts, Up To 6 Months	7.46	
		For >100 To 250, Deduct	*-0.18*	
		For >250 To 500, Deduct	*-0.36*	
		For >500, Deduct	*-0.54*	
		For Each LF Shade Cloth, Add	*1.60*	
01 56 26 00-0005	LF	Temporary 6' High Chain Link Fence And Posts, Up To 6 Months	8.32	
		For >100 To 250, Deduct	*-0.21*	
		For >250 To 500, Deduct	*-0.41*	
		For >500, Deduct	*-0.62*	
		For Each LF Shade Cloth, Add	*2.55*	
01 56 26 00-0006	LF	Temporary 8' High Chain Link Fence And Posts, Up To 6 Months	11.53	
		For >100 To 250, Deduct	*-0.35*	
		For >250 To 500, Deduct	*-0.69*	
		For >500, Deduct	*-1.04*	
		For Each LF Shade Cloth, Add	*3.60*	
01 56 26 00-0007	LF	Temporary 10' High Chain Link Fence And Posts, Up To 6 Months	25.66	
		For >100 To 250, Deduct	*-1.03*	
		For >250 To 500, Deduct	*-2.06*	
		For >500, Deduct	*-3.09*	
		For Each LF Shade Cloth, Add	*4.75*	

01 56 26 00-0008 Temporary Chain Link Fence, >6 To 12 Months *(01 56 26 00-0002)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 56 26 00-0009	LF	Temporary 4' High Chain Link Fence And Posts, >6 To 12 Months	7.83	
		For >100 To 250, Deduct	*-0.20*	
		For >250 To 500, Deduct	*-0.40*	
		For >500, Deduct	*-0.60*	
		For Each LF Shade Cloth, Add	*1.60*	
01 56 26 00-0010	LF	Temporary 6' High Chain Link Fence And Posts, >6 To 12 Months	8.72	
		For >100 To 250, Deduct	*-0.23*	
		For >250 To 500, Deduct	*-0.45*	
		For >500, Deduct	*-0.68*	
		For Each LF Shade Cloth, Add	*2.55*	
01 56 26 00-0011	LF	Temporary 8' High Chain Link Fence And Posts, >6 To 12 Months	12.21	
		For >100 To 250, Deduct	*-0.38*	
		For >250 To 500, Deduct	*-0.76*	
		For >500, Deduct	*-1.14*	
		For Each LF Shade Cloth, Add	*3.60*	
01 56 26 00-0012	LF	Temporary 10' High Chain Link Fence And Posts, >6 To 12 Months	27.71	
		For >100 To 250, Deduct	*-1.13*	
		For >250 To 500, Deduct	*-2.26*	
		For >500, Deduct	*-3.39*	
		For Each LF Shade Cloth, Add	*4.75*	

01 56 26 00-0013 Temporary Chain Link Fence, >12 To 18 Months *(01 56 26 00-0002)*

01 56 26 00-0014	LF	Temporary 4' High Chain Link Fence And Posts, >12 To 18 Months	8.24	
		For >100 To 250, Deduct	*-0.22*	
		For >250 To 500, Deduct	*-0.44*	
		For >500, Deduct	*-0.66*	
		For Each LF Shade Cloth, Add	*1.60*	
01 56 26 00-0015	LF	Temporary 6' High Chain Link Fence And Posts, >12 To 18 Months	9.18	
		For >100 To 250, Deduct	*-0.25*	
		For >250 To 500, Deduct	*-0.50*	
		For >500, Deduct	*-0.74*	
		For Each LF Shade Cloth, Add	*2.55*	
01 56 26 00-0016	LF	Temporary 8' High Chain Link Fence And Posts, >12 To 18 Months	12.99	
		For >100 To 250, Deduct	*-0.42*	
		For >250 To 500, Deduct	*-0.84*	
		For >500, Deduct	*-1.26*	
		For Each LF Shade Cloth, Add	*3.60*	
01 56 26 00-0017	LF	Temporary 10' High Chain Link Fence And Posts, >12 To 18 Months	29.97	
		For >100 To 250, Deduct	*-1.24*	
		For >250 To 500, Deduct	*-2.49*	
		For >500, Deduct	*-3.73*	
		For Each LF Shade Cloth, Add	*4.75*	

01 56 26 00-0018 Temporary Chain Link Fence, >18 Months *(01 56 26 00-0002)*

01 56 26 00-0019	LF	Temporary 4' High Chain Link Fence And Posts, >18 Months	8.67	
		For >100 To 250, Deduct	*-0.24*	
		For >250 To 500, Deduct	*-0.48*	
		For >500, Deduct	*-0.73*	
		For Each LF Shade Cloth, Add	*1.60*	
01 56 26 00-0020	LF	Temporary 6' High Chain Link Fence And Posts, >18 Months	9.65	
		For >100 To 250, Deduct	*-0.27*	
		For >250 To 500, Deduct	*-0.54*	
		For >500, Deduct	*-0.81*	
		For Each LF Shade Cloth, Add	*2.55*	
01 56 26 00-0021	LF	Temporary 8' High Chain Link Fence And Posts, >18 Months	13.81	
		For >100 To 250, Deduct	*-0.46*	
		For >250 To 500, Deduct	*-0.92*	
		For >500, Deduct	*-1.38*	
		For Each LF Shade Cloth, Add	*3.60*	
01 56 26 00-0022	LF	Temporary 10' High Chain Link Fence And Posts, >18 Months	32.46	
		For >100 To 250, Deduct	*-1.37*	
		For >250 To 500, Deduct	*-2.74*	
		For >500, Deduct	*-4.11*	
		For Each LF Shade Cloth, Add	*4.75*	

01 56 26 00-0023 Temporary Chain Link Fence Gates *(01 56 26 00-0001)*

Note: Includes delivery, set-up (driving posts) and removal. Excludes auguring/drilling for posts.

01 56 26 00-0024 Temporary Chain Link Fence Gates, Up To 6 Months *(01 56 26 00-0023)*

01 56 26 00-0025 4' High, Temporary Chain Link Fence Gates, Up To 6 Months *(01 56 26 00-0024)*

01 56 26 00-0026	EA	4' Wide, 4' High, Temporary Chain Link Fence Gate, Up To 6 Months	303.18	
		For Each LF Shade Cloth, Add	*17.27*	
01 56 26 00-0027	EA	10' Wide, 4' High, Temporary Chain Link Fence Gate, Up To 6 Months	513.19	
		For Each LF Shade Cloth, Add	*43.17*	
01 56 26 00-0028	EA	12' Wide, 4' High, Temporary Chain Link Fence Gate, Up To 6 Months	575.12	
		For Each LF Shade Cloth, Add	*51.80*	
01 56 26 00-0029	EA	15' Wide, 4' High, Temporary Chain Link Fence Gate, Up To 6 Months	654.32	
		For Each LF Shade Cloth, Add	*64.75*	
01 56 26 00-0030	EA	20' Wide, 4' High, Temporary Chain Link Fence Gate, Up To 6 Months	784.43	
		For Each LF Shade Cloth, Add	*86.34*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 56 26 00-0031	EA	24' Wide, 4' High, Temporary Chain Link Fence Gate, Up To 6 Months	872.39	
		For Each LF Shade Cloth, Add	*103.60*	

01 56 26 00-0032 6' High, Temporary Chain Link Fence Gates, Up To 6 Months *(01 56 26 00-0024)*

01 56 26 00-0033	EA	4' Wide, 6' High, Temporary Chain Link Fence Gate, Up To 6 Months	324.25	
		For Each LF Shade Cloth, Add	*27.52*	
01 56 26 00-0034	EA	10' Wide, 6' High, Temporary Chain Link Fence Gate, Up To 6 Months	553.50	
		For Each LF Shade Cloth, Add	*68.80*	
01 56 26 00-0035	EA	12' Wide, 6' High, Temporary Chain Link Fence Gate, Up To 6 Months	621.61	
		For Each LF Shade Cloth, Add	*82.56*	
01 56 26 00-0036	EA	15' Wide, 6' High, Temporary Chain Link Fence Gate, Up To 6 Months	719.47	
		For Each LF Shade Cloth, Add	*103.20*	
01 56 26 00-0037	EA	20' Wide, 6' High, Temporary Chain Link Fence Gate, Up To 6 Months	870.08	
		For Each LF Shade Cloth, Add	*137.60*	
01 56 26 00-0038	EA	24' Wide, 6' High, Temporary Chain Link Fence Gate, Up To 6 Months	985.75	
		For Each LF Shade Cloth, Add	*165.12*	

01 56 26 00-0039 8' High, Temporary Chain Link Fence Gates, Up To 6 Months *(01 56 26 00-0024)*

01 56 26 00-0040	EA	4' Wide, 8' High, Temporary Chain Link Fence Gate, Up To 6 Months	361.86	
		For Each LF Shade Cloth, Add	*38.85*	
01 56 26 00-0041	EA	10' Wide, 8' High, Temporary Chain Link Fence Gate, Up To 6 Months	633.31	
		For Shade Cloth, Add	*97.13*	
01 56 26 00-0042	EA	12' Wide, 8' High, Temporary Chain Link Fence Gate, Up To 6 Months	708.92	
		For Shade Cloth, Add	*116.55*	
01 56 26 00-0043	EA	15' Wide, 8' High, Temporary Chain Link Fence Gate, Up To 6 Months	810.98	
		For Shade Cloth, Add	*145.69*	
01 56 26 00-0044	EA	20' Wide, 8' High, Temporary Chain Link Fence Gate, Up To 6 Months	991.13	
		For Shade Cloth, Add	*194.26*	
01 56 26 00-0045	EA	24' Wide, 8' High, Temporary Chain Link Fence Gate, Up To 6 Months	1,147.58	
		For Shade Cloth, Add	*233.11*	

01 56 26 00-0046 10' High, Temporary Chain Link Fence Gates, Up To 6 Months *(01 56 26 00-0024)*

01 56 26 00-0047	EA	4' Wide, 10' High, Temporary Chain Link Fence Gate, Up To 6 Months	438.98	
		For Each LF Shade Cloth, Add	*51.26*	
01 56 26 00-0048	EA	10' Wide, 10' High, Temporary Chain Link Fence Gate, Up To 6 Months	760.72	
		For Each LF Shade Cloth, Add	*128.16*	
01 56 26 00-0049	EA	12' Wide, 10' High, Temporary Chain Link Fence Gate, Up To 6 Months	853.20	
		For Each LF Shade Cloth, Add	*153.79*	
01 56 26 00-0050	EA	15' Wide, 10' High, Temporary Chain Link Fence Gate, Up To 6 Months	974.64	
		For Each LF Shade Cloth, Add	*192.23*	
01 56 26 00-0051	EA	20' Wide, 10' High, Temporary Chain Link Fence Gate, Up To 6 Months	1,191.44	
		For Each LF Shade Cloth, Add	*256.31*	
01 56 26 00-0052	EA	24' Wide, 10' High, Temporary Chain Link Fence Gate, Up To 6 Months	1,373.31	
		For Each LF Shade Cloth, Add	*307.57*	

01 56 26 00-0053 Temporary Chain Link Fence Gates, >6 To 12 Months *(01 56 26 00-0023)*

01 56 26 00-0054 4' High, Temporary Chain Link Fence Gates, >6 To 12 Months *(01 56 26 00-0053)*

01 56 26 00-0055	EA	4' Wide, 4' High, Temporary Chain Link Fence Gate, >6 To 12 Months	314.75	
		For Each LF Shade Cloth, Add	*17.27*	
01 56 26 00-0056	EA	10' Wide, 4' High, Temporary Chain Link Fence Gate, >6 To 12 Months	531.17	
		For Each LF Shade Cloth, Add	*43.17*	
01 56 26 00-0057	EA	12' Wide, 4' High, Temporary Chain Link Fence Gate, >6 To 12 Months	595.68	
		For Each LF Shade Cloth, Add	*51.80*	
01 56 26 00-0058	EA	15' Wide, 4' High, Temporary Chain Link Fence Gate, >6 To 12 Months	677.44	
		For Each LF Shade Cloth, Add	*64.75*	
01 56 26 00-0059	EA	20' Wide, 4' High, Temporary Chain Link Fence Gate, >6 To 12 Months	812.70	
		For Each LF Shade Cloth, Add	*86.34*	
01 56 26 00-0060	EA	24' Wide, 4' High, Temporary Chain Link Fence Gate, >6 To 12 Months	903.22	
		For Each LF Shade Cloth, Add	*103.60*	

01 56 26 00-0061 6' High, Temporary Chain Link Fence Gates, >6 To 12 Months *(01 56 26 00-0053)*

01 56 26 00-0062	EA	4' Wide, 6' High, Temporary Chain Link Fence Gate, >6 To 12 Months	336.34	
		For Each LF Shade Cloth, Add	*27.52*	
01 56 26 00-0063	EA	10' Wide, 6' High, Temporary Chain Link Fence Gate, >6 To 12 Months	572.30	
		For Each LF Shade Cloth, Add	*68.80*	
01 56 26 00-0064	EA	12' Wide, 6' High, Temporary Chain Link Fence Gate, >6 To 12 Months	643.10	
		For Each LF Shade Cloth, Add	*82.56*	
01 56 26 00-0065	EA	15' Wide, 6' High, Temporary Chain Link Fence Gate, >6 To 12 Months	743.65	
		For Each LF Shade Cloth, Add	*103.20*	
01 56 26 00-0066	EA	20' Wide, 6' High, Temporary Chain Link Fence Gate, >6 To 12 Months	899.63	
		For Each LF Shade Cloth, Add	*137.60*	
01 56 26 00-0067	EA	24' Wide, 6' High, Temporary Chain Link Fence Gate, >6 To 12 Months	1,017.99	
		For Each LF Shade Cloth, Add	*165.12*	

01 56 26 00-0068 8' High, Temporary Chain Link Fence Gates, >6 To 12 Months *(01 56 26 00-0053)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 56 26 00-0069	EA	4' Wide, 8' High, Temporary Chain Link Fence Gate, >6 To 12 Months	375.15	
		For Each LF Shade Cloth, Add	*38.85*	
01 56 26 00-0070	EA	10' Wide, 8' High, Temporary Chain Link Fence Gate, >6 To 12 Months	654.00	
		For Shade Cloth, Add	*97.13*	
01 56 26 00-0071	EA	12' Wide, 8' High, Temporary Chain Link Fence Gate, >6 To 12 Months	732.56	
		For Shade Cloth, Add	*116.55*	
01 56 26 00-0072	EA	15' Wide, 8' High, Temporary Chain Link Fence Gate, >6 To 12 Months	837.58	
		For Shade Cloth, Add	*145.69*	
01 56 26 00-0073	EA	20' Wide, 8' High, Temporary Chain Link Fence Gate, >6 To 12 Months	1,023.63	
		For Shade Cloth, Add	*194.26*	
01 56 26 00-0074	EA	24' Wide, 8' High, Temporary Chain Link Fence Gate, >6 To 12 Months	1,183.04	
		For Shade Cloth, Add	*233.11*	

01 56 26 00-0075 10' High, Temporary Chain Link Fence Gates, >6 To 12 Months *(01 56 26 00-0053)*

01 56 26 00-0076	EA	4' Wide, 10' High, Temporary Chain Link Fence Gate, >6 To 12 Months	455.60	
		For Each LF Shade Cloth, Add	*51.26*	
01 56 26 00-0077	EA	10' Wide, 10' High, Temporary Chain Link Fence Gate, >6 To 12 Months	786.57	
		For Each LF Shade Cloth, Add	*128.16*	
01 56 26 00-0078	EA	12' Wide, 10' High, Temporary Chain Link Fence Gate, >6 To 12 Months	882.75	
		For Each LF Shade Cloth, Add	*153.79*	
01 56 26 00-0079	EA	15' Wide, 10' High, Temporary Chain Link Fence Gate, >6 To 12 Months	1,007.89	
		For Each LF Shade Cloth, Add	*192.23*	
01 56 26 00-0080	EA	20' Wide, 10' High, Temporary Chain Link Fence Gate, >6 To 12 Months	1,232.07	
		For Each LF Shade Cloth, Add	*256.31*	
01 56 26 00-0081	EA	24' Wide, 10' High, Temporary Chain Link Fence Gate, >6 To 12 Months	1,417.63	
		For Each LF Shade Cloth, Add	*307.57*	

01 56 26 00-0082 Temporary Chain Link Fence Gates, >12 To 18 Months *(01 56 26 00-0023)*

01 56 26 00-0083 4' High, Temporary Chain Link Fence Gates, >12 To 18 Months *(01 56 26 00-0082)*

01 56 26 00-0084	EA	4' Wide, 4' High, Temporary Chain Link Fence Gate, >12 To 18 Months	326.89	
		For Each LF Shade Cloth, Add	*17.27*	
01 56 26 00-0085	EA	10' Wide, 4' High, Temporary Chain Link Fence Gate, >12 To 18 Months	550.06	
		For Each LF Shade Cloth, Add	*43.17*	
01 56 26 00-0086	EA	12' Wide, 4' High, Temporary Chain Link Fence Gate, >12 To 18 Months	617.26	
		For Each LF Shade Cloth, Add	*51.80*	
01 56 26 00-0087	EA	15' Wide, 4' High, Temporary Chain Link Fence Gate, >12 To 18 Months	701.73	
		For Each LF Shade Cloth, Add	*64.75*	
01 56 26 00-0088	EA	20' Wide, 4' High, Temporary Chain Link Fence Gate, >12 To 18 Months	842.37	
		For Each LF Shade Cloth, Add	*86.34*	
01 56 26 00-0089	EA	24' Wide, 4' High, Temporary Chain Link Fence Gate, >12 To 18 Months	935.60	
		For Each LF Shade Cloth, Add	*103.60*	

01 56 26 00-0090 6' High, Temporary Chain Link Fence Gates, >12 To 18 Months *(01 56 26 00-0082)*

01 56 26 00-0091	EA	4' Wide, 6' High, Temporary Chain Link Fence Gate, >12 To 18 Months	349.04	
		For Each LF Shade Cloth, Add	*27.52*	
01 56 26 00-0092	EA	10' Wide, 6' High, Temporary Chain Link Fence Gate, >12 To 18 Months	592.04	
		For Each LF Shade Cloth, Add	*68.80*	
01 56 26 00-0093	EA	12' Wide, 6' High, Temporary Chain Link Fence Gate, >12 To 18 Months	665.66	
		For Each LF Shade Cloth, Add	*82.56*	
01 56 26 00-0094	EA	15' Wide, 6' High, Temporary Chain Link Fence Gate, >12 To 18 Months	769.03	
		For Each LF Shade Cloth, Add	*103.20*	
01 56 26 00-0095	EA	20' Wide, 6' High, Temporary Chain Link Fence Gate, >12 To 18 Months	930.66	
		For Each LF Shade Cloth, Add	*137.60*	
01 56 26 00-0096	EA	24' Wide, 6' High, Temporary Chain Link Fence Gate, >12 To 18 Months	1,051.83	
		For Each LF Shade Cloth, Add	*165.12*	

01 56 26 00-0097 8' High, Temporary Chain Link Fence Gates, >12 To 18 Months *(01 56 26 00-0082)*

01 56 26 00-0098	EA	4' Wide, 8' High, Temporary Chain Link Fence Gate, >12 To 18 Months	389.12	
		For Each LF Shade Cloth, Add	*38.85*	
01 56 26 00-0099	EA	10' Wide, 8' High, Temporary Chain Link Fence Gate, >12 To 18 Months	675.72	
		For Shade Cloth, Add	*97.13*	
01 56 26 00-0100	EA	12' Wide, 8' High, Temporary Chain Link Fence Gate, >12 To 18 Months	757.38	
		For Shade Cloth, Add	*116.55*	
01 56 26 00-0101	EA	15' Wide, 8' High, Temporary Chain Link Fence Gate, >12 To 18 Months	865.50	
		For Shade Cloth, Add	*145.69*	
01 56 26 00-0102	EA	20' Wide, 8' High, Temporary Chain Link Fence Gate, >12 To 18 Months	1,057.76	
		For Shade Cloth, Add	*194.26*	
01 56 26 00-0103	EA	24' Wide, 8' High, Temporary Chain Link Fence Gate, >12 To 18 Months	1,220.27	
		For Shade Cloth, Add	*233.11*	

01 56 26 00-0104 10' High, Temporary Chain Link Fence Gates, >12 To 18 Months *(01 56 26 00-0082)*

01 56 26 00-0105	EA	4' Wide, 10' High, Temporary Chain Link Fence Gate, >12 To 18 Months	473.06	
		For Each LF Shade Cloth, Add	*51.26*	
01 56 26 00-0106	EA	10' Wide, 10' High, Temporary Chain Link Fence Gate, >12 To 18 Months	813.72	
		For Each LF Shade Cloth, Add	*128.16*	
01 56 26 00-0107	EA	12' Wide, 10' High, Temporary Chain Link Fence Gate, >12 To 18 Months	913.78	
		For Each LF Shade Cloth, Add	*153.79*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 56 26 00-0108	EA	15' Wide, 10' High, Temporary Chain Link Fence Gate, >12 To 18 Months	1,042.79	
		For Each LF Shade Cloth, Add	*192.23*	
01 56 26 00-0109	EA	20' Wide, 10' High, Temporary Chain Link Fence Gate, >12 To 18 Months	1,274.73	
		For Each LF Shade Cloth, Add	*256.31*	
01 56 26 00-0110	EA	24' Wide, 10' High, Temporary Chain Link Fence Gate, >12 To 18 Months	1,464.17	
		For Each LF Shade Cloth, Add	*307.57*	

01 56 26 00-0111 Temporary Chain Link Fence Gates, >18 Months *(01 56 26 00-0023)*

01 56 26 00-0112 4' High, Temporary Chain Link Fence Gates, >18 Months *(01 56 26 00-0111)*

01 56 26 00-0113	EA	4' Wide, 4' High, Temporary Chain Link Fence Gate, >18 Months	339.03	
		For Each LF Shade Cloth, Add	*17.27*	
01 56 26 00-0114	EA	10' Wide, 4' High, Temporary Chain Link Fence Gate, >18 Months	568.95	
		For Each LF Shade Cloth, Add	*43.17*	
01 56 26 00-0115	EA	12' Wide, 4' High, Temporary Chain Link Fence Gate, >18 Months	638.85	
		For Each LF Shade Cloth, Add	*51.80*	
01 56 26 00-0116	EA	15' Wide, 4' High, Temporary Chain Link Fence Gate, >18 Months	726.01	
		For Each LF Shade Cloth, Add	*64.75*	
01 56 26 00-0117	EA	20' Wide, 4' High, Temporary Chain Link Fence Gate, >18 Months	872.05	
		For Each LF Shade Cloth, Add	*86.34*	
01 56 26 00-0118	EA	24' Wide, 4' High, Temporary Chain Link Fence Gate, >18 Months	967.98	
		For Each LF Shade Cloth, Add	*103.60*	

01 56 26 00-0119 6' High, Temporary Chain Link Fence Gates, >18 Months *(01 56 26 00-0111)*

01 56 26 00-0120	EA	4' Wide, 6' High, Temporary Chain Link Fence Gate, >18 Months	361.73	
		For Each LF Shade Cloth, Add	*27.52*	
01 56 26 00-0121	EA	10' Wide, 6' High, Temporary Chain Link Fence Gate, >18 Months	611.79	
		For Each LF Shade Cloth, Add	*68.80*	
01 56 26 00-0122	EA	12' Wide, 6' High, Temporary Chain Link Fence Gate, >18 Months	688.23	
		For Each LF Shade Cloth, Add	*82.56*	
01 56 26 00-0123	EA	15' Wide, 6' High, Temporary Chain Link Fence Gate, >18 Months	794.42	
		For Each LF Shade Cloth, Add	*103.20*	
01 56 26 00-0124	EA	20' Wide, 6' High, Temporary Chain Link Fence Gate, >18 Months	961.68	
		For Each LF Shade Cloth, Add	*137.60*	
01 56 26 00-0125	EA	24' Wide, 6' High, Temporary Chain Link Fence Gate, >18 Months	1,085.68	
		For Each LF Shade Cloth, Add	*165.12*	

01 56 26 00-0126 8' High, Temporary Chain Link Fence Gates, >18 Months *(01 56 26 00-0111)*

01 56 26 00-0127	EA	4' Wide, 8' High, Temporary Chain Link Fence Gate, >18 Months	403.08	
		For Each LF Shade Cloth, Add	*38.85*	
01 56 26 00-0128	EA	10' Wide, 8' High, Temporary Chain Link Fence Gate, >18 Months	697.44	
		For Shade Cloth, Add	*97.13*	
01 56 26 00-0129	EA	12' Wide, 8' High, Temporary Chain Link Fence Gate, >18 Months	782.21	
		For Shade Cloth, Add	*116.55*	
01 56 26 00-0130	EA	15' Wide, 8' High, Temporary Chain Link Fence Gate, >18 Months	893.42	
		For Shade Cloth, Add	*145.69*	
01 56 26 00-0131	EA	20' Wide, 8' High, Temporary Chain Link Fence Gate, >18 Months	1,091.89	
		For Shade Cloth, Add	*194.26*	
01 56 26 00-0132	EA	24' Wide, 8' High, Temporary Chain Link Fence Gate, >18 Months	1,257.50	
		For Shade Cloth, Add	*233.11*	

01 56 26 00-0133 10' High, Temporary Chain Link Fence Gates, >18 Months *(01 56 26 00-0111)*

01 56 26 00-0134	EA	4' Wide, 10' High, Temporary Chain Link Fence Gate, >18 Months	490.51	
		For Each LF Shade Cloth, Add	*51.26*	
01 56 26 00-0135	EA	10' Wide, 10' High, Temporary Chain Link Fence Gate, >18 Months	840.87	
		For Each LF Shade Cloth, Add	*128.16*	
01 56 26 00-0136	EA	12' Wide, 10' High, Temporary Chain Link Fence Gate, >18 Months	944.80	
		For Each LF Shade Cloth, Add	*153.79*	
01 56 26 00-0137	EA	15' Wide, 10' High, Temporary Chain Link Fence Gate, >18 Months	1,077.70	
		For Each LF Shade Cloth, Add	*192.23*	
01 56 26 00-0138	EA	20' Wide, 10' High, Temporary Chain Link Fence Gate, >18 Months	1,317.40	
		For Each LF Shade Cloth, Add	*256.31*	
01 56 26 00-0139	EA	24' Wide, 10' High, Temporary Chain Link Fence Gate, >18 Months	1,510.71	
		For Each LF Shade Cloth, Add	*307.57*	

01 56 26 00-0140 Temporary Chain Link Fence Panels (Portable) *(01 56 26 00-0001)*

Note: Includes delivery, set-up and removal. Excludes sandbags.

01 56 26 00-0141 Temporary Chain Link Fence Panels (Portable), Up To 6 Months *(01 56 26 00-0140)*

01 56 26 00-0142	LF	Temporary 4' High Chain Link Fence Panels (Portable), Up To 6 Months	8.17	
		For >100 To 250, Deduct	*-0.22*	
		For >250 To 500, Deduct	*-0.43*	
		For >500, Deduct	*-0.65*	
		For Each LF Shade Cloth, Add	*1.60*	
01 56 26 00-0143	LF	Temporary 6' High Chain Link Fence Panels (Portable), Up To 6 Months	9.09	
		For >100 To 250, Deduct	*-0.24*	
		For >250 To 500, Deduct	*-0.49*	
		For >500, Deduct	*-0.73*	
		For Each LF Shade Cloth, Add	*2.55*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 56 26 00-0144	LF	Temporary 8' High Chain Link Fence Panels (Portable), Up To 6 Months	12.46	
		For >100 To 250, Deduct	*-0.39*	
		For >250 To 500, Deduct	*-0.79*	
		For >500, Deduct	*-1.18*	
		For Each LF Shade Cloth, Add	*3.60*	

01 56 26 00-0145 Temporary Chain Link Fence Panels (Portable), >6 To 12 Months *(01 56 26 00-0140)*

01 56 26 00-0146	LF	Temporary 4' High Chain Link Fence Panels (Portable), >6 To 12 Months	8.55	
		For >100 To 250, Deduct	*-0.24*	
		For >250 To 500, Deduct	*-0.47*	
		For >500, Deduct	*-0.71*	
		For Each LF Shade Cloth, Add	*1.60*	
01 56 26 00-0147	LF	Temporary 6' High Chain Link Fence Panels (Portable), >6 To 12 Months	9.49	
		For >100 To 250, Deduct	*-0.26*	
		For >250 To 500, Deduct	*-0.53*	
		For >500, Deduct	*-0.79*	
		For Each LF Shade Cloth, Add	*2.55*	
01 56 26 00-0148	LF	Temporary 8' High Chain Link Fence Panels (Portable), >6 To 12 Months	13.14	
		For >100 To 250, Deduct	*-0.43*	
		For >250 To 500, Deduct	*-0.85*	
		For >500, Deduct	*-1.28*	
		For Each LF Shade Cloth, Add	*3.60*	

01 56 26 00-0149 Temporary Chain Link Fence Panels (Portable), >12 To 18 Months *(01 56 26 00-0140)*

01 56 26 00-0150	LF	Temporary 4' High Chain Link Fence Panels (Portable), >12 To 18 Months	8.92	
		For >100 To 250, Deduct	*-0.25*	
		For >250 To 500, Deduct	*-0.51*	
		For >500, Deduct	*-0.76*	
		For Each LF Shade Cloth, Add	*1.60*	
01 56 26 00-0151	LF	Temporary 6' High Chain Link Fence Panels (Portable), >12 To 18 Months	9.96	
		For >100 To 250, Deduct	*-0.29*	
		For >250 To 500, Deduct	*-0.57*	
		For >500, Deduct	*-0.86*	
		For Each LF Shade Cloth, Add	*2.55*	
01 56 26 00-0152	LF	Temporary 8' High Chain Link Fence Panels (Portable), >12 To 18 Months	13.92	
		For >100 To 250, Deduct	*-0.47*	
		For >250 To 500, Deduct	*-0.93*	
		For >500, Deduct	*-1.40*	
		For Each LF Shade Cloth, Add	*3.60*	

01 56 26 00-0153 Temporary Chain Link Fence Panels (Portable), >18 Months *(01 56 26 00-0140)*

01 56 26 00-0154	LF	Temporary 4' High Chain Link Fence Panels (Portable), >18 Months	9.38	
		For >100 To 250, Deduct	*-0.28*	
		For >250 To 500, Deduct	*-0.56*	
		For >500, Deduct	*-0.83*	
		For Each LF Shade Cloth, Add	*1.60*	
01 56 26 00-0155	LF	Temporary 6' High Chain Link Fence Panels (Portable), >18 Months	10.43	
		For >100 To 250, Deduct	*-0.31*	
		For >250 To 500, Deduct	*-0.62*	
		For >500, Deduct	*-0.93*	
		For Each LF Shade Cloth, Add	*2.55*	
01 56 26 00-0156	LF	Temporary 8' High Chain Link Fence Panels (Portable), >18 Months	14.72	
		For >100 To 250, Deduct	*-0.51*	
		For >250 To 500, Deduct	*-1.01*	
		For >500, Deduct	*-1.52*	
		For Each LF Shade Cloth, Add	*3.60*	

01 56 26 00-0157 Temporary Chain Link Fence Panels (Portable) Sandbags *(01 56 26 00-0140)*

01 56 26 00-0158	BAG	Temporary Chain Link Fence Panels (Portable) Sandbag Note: Includes placement and removal.	7.30

01 56 26 00-0159 Temporary Rail And Timber Structure *(01 56 26 00-0001)*

01 56 26 00-0160	LF	4' High Temporary Rail And Timber Structure Note: Includes steel posts, rails and plates, excavation, concrete, forming, finish, backfill and creosoted planking with 2" gaps	238.95
01 56 26 00-0161	LF	6' High Temporary Rail And Timber Structure Note: Includes steel posts, rails and plates, excavation, concrete, forming, finish, backfill and creosoted planking with 2" gaps	340.88
01 56 26 00-0162	LF	8' High Temporary Rail And Timber Structure Note: Includes steel posts, rails and plates, excavation, concrete, forming, finish, backfill and creosoted planking with 2" gaps	442.81
01 56 26 00-0163	LF	10' High Temporary Rail And Timber Structure Note: Includes steel posts, rails and plates, excavation, concrete, forming, finish, backfill and creosoted planking with 2" gaps	566.95
01 56 26 00-0164	LF	12' High Temporary Rail And Timber Structure Note: Includes steel posts, rails and plates, excavation, concrete, forming, finish, backfill and creosoted planking with 2" gaps	659.29

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 56 26 00-0165	LF	15' High Temporary Rail And Timber Structure Note: Includes steel posts, rails and plates, excavation, concrete, forming, finish, backfill and creosoted planking with 2" gaps	756.44	
01 56 26 00-0166		Relocate Chain Link Fence, Gates And Panels *(01 56 26 00-0001)* Note: Excludes auguring/drilling for posts.		
01 56 26 00-0167		Relocate Temporary Chain Link Fence On Site *(01 56 26 00-0166)*		
01 56 26 00-0168	LF	Relocate Temporary 4' High Chain Link Fence And Posts	4.25	
01 56 26 00-0169	LF	Relocate Temporary 6' High Chain Link Fence And Posts	6.36	
01 56 26 00-0170	LF	Relocate Temporary 8' High Chain Link Fence And Posts	9.19	
01 56 26 00-0171	LF	Relocate Temporary 10' High Chain Link Fence And Posts	11.32	
01 56 26 00-0172		Relocate Temporary Chain Link Fence Panels On Site *(01 56 26 00-0166)*		
01 56 26 00-0173	LF	Relocate Temporary 4' High Chain Link Fence Panel, Self Standing	0.96	
01 56 26 00-0174	LF	Relocate Temporary 6' High Chain Link Fence Panel, Self Standing	1.15	
01 56 26 00-0175	LF	Relocate Temporary 8' High Chain Link Fence Panel, Self Standing	1.29	
01 56 26 00-0176		Relocate Temporary Chain Link Gates On Site *(01 56 26 00-0166)*		
01 56 26 00-0177	EA	Relocate Temporary 4' High Chain Link Vehicle Gate And Posts	124.66	
01 56 26 00-0178	EA	Relocate Temporary 6' High Chain Link Vehicle Gate And Posts	143.85	
01 56 26 00-0179	EA	Relocate Temporary 8' High Chain Link Vehicle Gate And Posts	177.40	
01 56 26 00-0180	EA	Relocate Temporary 10' High Chain Link Vehicle Gate And Posts	191.79	
01 56 26 00-0181		Temporary Safety Fence *(01 56 26)* Note: Includes removal after use.		
01 56 26 00-0182	LF	48" High With Posts At 8' On Center, Plastic Mesh Temporary Safety Fence	3.69	
01 56 29		**Temporary Protective Walkways** *(01 56)*		
01 56 29 00-0001		Temporary Sidewalk Bridge Protection *(01 56 29)*		
01 56 29 00-0002		Installation of Sidewalk Bridge *(01 56 29 00-0001)* Note: Excludes material rental. See CSI section 01 56 29 00-0005 for monthly rental x length.		
01 56 29 00-0003	LF	Installation of Heavy-Duty Steel Post And Beam Sidewalk Bridge Assembly Note: Includes spanning openings, planking and parapet, lighting, up to 8' wide, up to 8' high, 2 post system.	204.11	
		For 3 Post System, Add	*6.00*	
		For Each Additional Foot Over 8' Wide, Add	*3.00*	
		For Each Additional Foot Over 8' High, Add	*2.00*	
01 56 29 00-0004	LF	Installation of Netting for Sidewalk Bridge	5.20	
01 56 29 00-0005		Monthly Rental of Sidewalk Bridge *(01 56 29 00-0001)* Note: Excludes installation set-up and removal. See CSI section 01 56 29 00-0002 for installation set-up, 01 56 29 00-0016 for removal.		
01 56 29 00-0006	LF	Monthly Rental Of Up To 8' Wide And 8' High, 2 Post System, Heavy-Duty Steel Post And Beam Sidewalk Bridge Assembly Note: Includes spanning openings, planking and parapet, lighting and maintenance.	15.89	
		For 3 Post System, Add	*2.38*	
01 56 29 00-0007	LF	Monthly Rental Of Up To 8' Wide, 8' - 12' High, 2 Post System, Heavy-Duty Steel Post And Beam Sidewalk Bridge Assembly Note: Includes spanning openings, planking and parapet, lighting and maintenance.	17.89	
		For 3 Post System, Add	*2.68*	
01 56 29 00-0008	LF	Monthly Rental Of Up To 8' Wide, Over 12' High, 2 Post System, Heavy-Duty Steel Post And Beam Sidewalk Bridge Assembly Note: Includes spanning openings, planking and parapet, lighting and maintenance.	19.88	
		For 3 Post System, Add	*2.98*	
01 56 29 00-0009	LF	Monthly Rental Of 8' - 12' Wide And 8' High, 2 Post System, Heavy-Duty Steel Post And Beam Sidewalk Bridge Assembly Note: Includes spanning openings, planking and parapet, lighting and maintenance.	19.88	
		For 3 Post System, Add	*2.98*	
01 56 29 00-0010	LF	Monthly Rental Of 8' - 12' Wide, 8' - 12' High, 2 Post System, Heavy-Duty Steel Post And Beam Sidewalk Bridge Assembly Note: Includes spanning openings, planking and parapet, lighting and maintenance.	21.84	
		For 3 Post System, Add	*3.28*	
01 56 29 00-0011	LF	Monthly Rental Of 8' - 12' Wide, Over 12' High, 2 Post System, Heavy-Duty Steel Post And Beam Sidewalk Bridge Assembly Note: Includes spanning openings, planking and parapet, lighting and maintenance.	25.86	
		For 3 Post System, Add	*3.88*	
01 56 29 00-0012	LF	Monthly Rental Of Over 12' Wide And 8' High, 2 Post System, Heavy-Duty Steel Post And Beam Sidewalk Bridge Assembly Note: Includes spanning openings, planking and parapet, lighting and maintenance.	23.87	
		For 3 Post System, Add	*3.58*	
01 56 29 00-0013	LF	Monthly Rental Of Over 12' Wide, 8' - 12' High, 2 Post System, Heavy-Duty Steel Post And Beam Sidewalk Bridge Assembly Note: Includes spanning openings, planking and parapet, lighting and maintenance.	27.84	
		For 3 Post System, Add	*4.18*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 56 29 00-0014	LF	Monthly Rental Of Over 12' Wide, Over 12' High, 2 Post System, Heavy-Duty Steel Post And Beam Sidewalk Bridge Assembly	29.79	
		Note: Includes spanning openings, planking and parapet, lighting and maintenance.		
		For 3 Post System, Add	*4.47*	
01 56 29 00-0015	LF	Monthly Rental of Netting for Sidewalk Bridge	2.98	
01 56 29 00-0016		**Removal of Sidewalk Bridge** *(01 56 29 00-0001)*		
01 56 29 00-0017	LF	Removal Of Heavy-Duty Steel Post And Beam Sidewalk Bridge Assembly	42.48	
		Note: Includes spanning openings, planking and parapet, lighting, up to 8' wide, up to 8' high, 2 post system.		
		For 3 Post System, Add	*2.50*	
		For Each Additional Foot Over 8' Wide, Add	*1.25*	
		For Each Additional Foot Over 8' High, Add	*0.75*	
01 56 29 00-0018	LF	Removal Of Netting For Sidewalk Bridge	1.43	
01 56 29 00-0019		**Temporary Safety Nets** *(01 56 29)*		
		Note: Includes removal after use.		
01 56 29 00-0020	SF	Small Mesh Debris Netting	3.01	
		Note: Includes 3" molded plastic base plates, plastic cable ties, and 1/4", 7x9 aircraft cable tied off to structure, not including anchors.		
01 56 33		**Temporary Security Barriers** *(01 56)*		
01 56 33 00-0001		**Board-up Opening With Plywood** *(01 56 33)*		
		Note: For use where directed by owner for boarding up door and window openings.		
01 56 33 00-0002	OPNG	Removal Of Protective Barrier To Allow Work In Building, Reseal At End Of Day, Per Opening Per Day	14.39	
01 56 33 00-0003	SF	5/8" Thick Plywood, 2" x 4" Wood Stud Framing And Fasteners, For Board-Up Opening	9.31	
01 56 33 00-0004	SF	3/4" Thick Plywood, 2" x 4" Wood Stud Framing And Fasteners, For Board-Up Opening	10.78	
01 56 33 00-0005		**Temporary Pedestrian Barricade** *(01 56 33)*		
		Note: Portable, interlocking galvanized steel fence with pivoting legs.		
01 56 33 00-0006	DAY	3-1/2' x 7-1/2' Galvanized Steel Pedestrian Barricade, Rental	14.84	
01 56 33 00-0007	WK	3-1/2' x 7-1/2' Galvanized Steel Pedestrian Barricade, Rental	36.04	
01 56 33 00-0008	MO	3-1/2' x 7-1/2' Galvanized Steel Pedestrian Barricade, Rental	108.13	
01 56 39		**Temporary Tree and Plant Protection** *(01 56)*		
01 56 39 00-0001		**Temporary Tree Guards** *(01 56 39)*		
		Note: Includes digging holes and removal after use.		
01 56 39 00-0002	EA	Up To 4' x 4' Temporary Tree Guard, 2" x 4" Wood Stud Framing Construction, 4 Uprights Set In Earth 2' Deep, With Double Rail	210.59	
01 56 39 00-0003	EA	4' x 4' Temporary Tree Guard, 2" x 4" Wood Stud Framing Construction, 4 Uprights Set In Earth 2' Deep, With Double Rail	250.15	
01 56 39 00-0004	EA	6' x 6' Temporary Tree Guard, 2" x 4" Wood Stud Framing Construction, 4 Uprights Set In Earth 2' Deep, With Double Rail	271.96	

01 57 Temporary Controls *(01 50)*

01 57 13 Temporary Erosion and Sediment Control *(01 57)*

See CSI section 31 25 00 00-0000 for temporary erosion and sediment control.

01 57 23 Temporary Storm Water Pollution Control *(01 57)*

01 57 23 00-0001		**Temporary Drain Guard** *(01 57 23)*		
		Note: Includes removal after use.		
01 57 23 00-0002	EA	36" x 48" x 18" Non-Woven Polypropylene Trash and Debris Drain Guard (Ultra-Drain Guard® 9227)	115.49	
01 57 23 00-0003	EA	36" x 48" x 18" Non-Woven Polypropylene Oil and Sediment Drain Guard (Ultra-Drain Guard® 9217)	113.31	
		Note: Up to 0.87 gallons oil, up to 40 Lb. sediment.		
01 57 23 00-0004	EA	36" x 48" x 18" Non-Woven Polypropylene Oil and Sediment Drain Guard (Ultra-Drain Guard® 9219)	144.03	
		Note: Up to 1.38 gallons oil, up to 40 Lb. sediment.		
01 57 23 00-0005	EA	60" x 60" x 18" Non-Woven Polypropylene Oil and Sediment Drain Guard (Ultra-Drain Guard® 9356)	141.82	
		Note: Up to 1.55 gallons oil, up to 40 Lb. sediment.		
01 57 23 00-0006	EA	60" x 60" x 18" Non-Woven Polypropylene Oil and Sediment Drain Guard (Ultra-Drain Guard® 9358)	174.75	
		Note: Up to 2.06 gallons oil, up to 40 Lb. sediment.		

01 57 26 Site Watering for Dust Control *(01 57)*

01 57 26 00-0001		**Site Watering for Dust Control** *(01 57 26)*		
		See CSI section 31 23 23 23-0001 for water and water truck.		
01 57 26 00-0002	MSF	Apply Synthetic, Liquid Dust Suppression Fluid With GTL Technology (Soil Works Durasoil)	110.14	
		Note: GTL (Gas-to-Liquid)		
01 57 26 00-0003	MSF	Apply 2% Solution Of Biodegradable, Liquid Copolymer Dust Suppression Fluid To Ground (Soil Works Gorrila-Snot)	45.45	
01 57 26 00-0004	MSF	Apply 4% Solution Of Biodegradable, Liquid Copolymer Dust Suppression Fluid To Ground (Soil Works Gorrila-Snot)	68.36	
01 57 26 00-0005	MSF	Apply 8% Solution Of Biodegradable, Liquid Copolymer Dust Suppression Fluid To Ground (Soil Works Gorrila-Snot)	114.16	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 57 26 00-0006	MSF	Apply 12% Solution Of Biodegradable, Liquid Copolymer Dust Suppression Fluid To Ground (Soil Works Gorrila-Snot)	159.97	

01 58 Project Identification *(01 50)*

Note: Includes removal after use.

01 58 13 Temporary Project Signage *(01 58)*

01 58 13 00-0001 Project Sign *(01 58 13)*

01 58 13 00-0002 MDO Plywood Signs *(01 58 13 00-0001)*

Note: Excludes posts.

01 58 13 00-0003 Reflectorized, MDO Plywood Signs *(01 58 13 00-0002)*

01 58 13 00-0004 Engineer Grade, Reflectorized, MDO Plywood Signs *(01 58 13 00-0003)*

01 58 13 00-0005	EA	Up To 8 SF, One Or Two Color Design, Engineer Grade, Reflectorized, MDO Plywood Sign	167.02	26.38
		For High-Intensity Grade, Add	*39.99*	
		For Diamond Grade, Add	*77.13*	
01 58 13 00-0006	EA	>8 To 16 SF, One Or Two Color Design, Engineer Grade, Reflectorized, MDO Plywood Sign	283.70	27.57
		For High-Intensity Grade, Add	*79.99*	
		For Diamond Grade, Add	*154.27*	
01 58 13 00-0007	EA	>16 To 24 SF, One Or Two Color Design, Engineer Grade, Reflectorized, MDO Plywood Sign	400.36	28.77
		For High-Intensity Grade, Add	*119.99*	
		For Diamond Grade, Add	*231.40*	
01 58 13 00-0008	EA	>24 To 32 SF, One Or Two Color Design, Engineer Grade, Reflectorized, MDO Plywood Sign	517.04	29.97
		For High-Intensity Grade, Add	*159.99*	
		For Diamond Grade, Add	*308.54*	
01 58 13 00-0009	SF	>32 SF, One Or Two Color Design, Engineer Grade, Reflectorized, MDO Plywood Sign	16.20	0.96
		For High-Intensity Grade, Add	*5.00*	
		For Diamond Grade, Add	*9.64*	

01 58 13 00-0010 Non-Reflectorized, MDO Plywood Signs *(01 58 13 00-0002)*

01 58 13 00-0011 One Or Two Color Design, Non-Reflectorized, MDO Plywood Signs *(01 58 13 00-0010)*

01 58 13 00-0012	EA	Up To 8 SF, One Or Two Color Design, Non-Reflectorized, MDO Plywood Sign	214.84	26.38
01 58 13 00-0013	EA	>8 To 16 SF, One Or Two Color Design, Non-Reflectorized, MDO Plywood Sign	255.92	27.57
01 58 13 00-0014	EA	>16 To 24 SF, One Or Two Color Design, Non-Reflectorized, MDO Plywood Sign	320.01	28.77
01 58 13 00-0015	EA	>24 To 32 SF, One Or Two Color Design, Non-Reflectorized, MDO Plywood Sign	380.54	29.97
01 58 13 00-0016	SF	>32 SF, One Or Two Color Design, Non-Reflectorized, MDO Plywood Sign	11.94	0.96

01 58 13 00-0017 Full Color Design, Non-Reflectorized, MDO Plywood Signs *(01 58 13 00-0010)*

01 58 13 00-0018	EA	Up To 8 SF, Full Color Design, Non-Reflectorized, MDO Plywood Sign	219.40	26.38
01 58 13 00-0019	EA	>8 To 16 SF, Full Color Design, Non-Reflectorized, MDO Plywood Sign	280.52	27.57
01 58 13 00-0020	EA	>16 To 24 SF, Full Color Design, Non-Reflectorized, MDO Plywood Sign	345.01	28.77
01 58 13 00-0021	EA	>24 To 32 SF, Full Color Design, Non-Reflectorized, MDO Plywood Sign	401.97	29.97
01 58 13 00-0022	SF	>32 SF, Full Color Design, Non-Reflectorized, MDO Plywood Sign	12.61	0.96

01 58 13 00-0023 Fabricate And Install New Posts *(01 58 13 00-0001)*

Note: Includes excavation, backfill and compaction. Excludes core drilling.

01 58 13 00-0024	LF	Galvanized Metal Channel Sign Posts	20.61
01 58 13 00-0025	LF	4" x 4" Pressure Treated Wood Sign Posts	15.57
01 58 13 00-0026	LF	4" x 6" Pressure Treated Wood Sign Posts	18.64

01 58 13 00-0027 Owner Supplied Signs *(01 58 13 00-0001)*

01 58 13 00-0028	EA	Installation And Removal Of Owner Supplied Project Sign	95.91

01 60 Product Requirements *(01)*

01 66 Product Storage and Handling Requirements *(01 60)*

01 66 19 Product Handling Requirements *(01 66)*

Note: Not for use in conjunction with other tasks when the distance is less than 2 stories or less than 125'.

01 66 19 00-0001 Transfer Delivered Materials Between Floors *(01 66 19)*

Note: For moving delivered, owner supplied or existing materials in a building.

01 66 19 00-0002	CY	Transfer Delivered Material Between Floors Via Stairs, Per Floor Note: Quantity equals volume of materials multiplied by number of floors traveled.	18.44
01 66 19 00-0003	CY	Transfer Delivered Material Between Floors Via Elevator, Per Trip Note: Quantity is not multiplied by number of floors traveled. Includes transfer of materials between elevators, if more than one bank of elevators is required.	11.99
01 66 19 00-0004	EA	Moving Material Via Elevator 4" x 24" x 48" Container Per Trip	0.62
01 66 19 00-0005	EA	Moving Material Via Elevator 6" x 24" x 48" Container Per Trip	0.93
01 66 19 00-0006	EA	Moving Material Via Elevator 9" x 24" x 48" Container Per Trip	1.40
01 66 19 00-0007	EA	Moving Material Via Elevator 12" x 24" x 48" Container Per Trip	1.88
01 66 19 00-0008	EA	Moving Material Via Elevator 4" x 48" x 48" Container Per Trip	1.25
01 66 19 00-0009	EA	Moving Material Via Elevator 6" x 48" x 48" Container Per Trip	1.88

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 66 19 00-0010	EA	Moving Material Via Elevator 9" x 48" x 48" Container Per Trip	2.81	
01 66 19 00-0011	EA	Moving Material Via Elevator 9" x 9" x 48" Container Per Trip	0.53	
01 66 19 00-0012	EA	Moving Material Via Elevator 12" x 12" x 48" Container Per Trip	0.93	
01 66 19 00-0013	EA	Moving Material Via Elevator 8.5" x 4.25" x 48" Container Per Trip	0.23	
01 66 19 00-0014	EA	Moving Material Via Elevator 16" x 16" x 24" Container Per Trip	0.83	
01 66 19 00-0015	EA	Moving Material Via Elevator 22" x 22" x 24" Container Per Trip	1.57	
01 66 19 00-0016	EA	Moving Material Via Elevator 48" x 40" x 48" Container Per Trip	12.50	
01 66 19 00-0017	EA	Moving Material Via Elevator 9" x 9" x 96" Container Per Trip	1.05	
01 66 19 00-0018	EA	Moving Material Via Elevator 12" x 12" x 96" Container Per Trip	1.88	
01 66 19 00-0019	EA	Moving Material Via Elevator 8.5" x 4.25" x 96" Container Per Trip	0.47	
01 66 19 00-0020	EA	Moving Material Via Elevator 3.5 Gallon Round Container Per Trip	0.11	
01 66 19 00-0021	EA	Moving Material Via Elevator 5 Gallon Round Container Per Trip	0.16	
01 66 19 00-0022	EA	Moving Material Via Elevator 14 Gallon Round Container Per Trip	0.44	
01 66 19 00-0023	EA	Moving Material Via Elevator 30 Gallon Round Container Per Trip	0.94	
01 66 19 00-0024	EA	Moving Material Via Elevator 55 Gallon Round Container Per Trip	1.73	
01 66 19 00-0025	EA	Moving Material Via Stairs 4" x 24" x 48" Container Per Floor Per Trip	1.04	
01 66 19 00-0026	EA	Moving Material Via Stairs 6" x 24" x 48" Container Per Floor Per Trip	1.56	
01 66 19 00-0027	EA	Moving Material Via Stairs 9" x 24" x 48" Container Per Floor Per Trip	2.35	
01 66 19 00-0028	EA	Moving Material Via Stairs 12" x 24" x 48" Container Per Floor Per Trip	3.13	
01 66 19 00-0029	EA	Moving Material Via Stairs 4" x 48" x 48" Container Per Floor Per Trip	2.09	
01 66 19 00-0030	EA	Moving Material Via Stairs 6" x 48" x 48" Container Per Floor Per Trip	3.13	
01 66 19 00-0031	EA	Moving Material Via Stairs 9" x 48" x 48" Container Per Floor Per Trip	4.68	
01 66 19 00-0032	EA	Moving Material Via Stairs 9" x 9" x 48" Container Per Floor Per Trip	0.88	
01 66 19 00-0033	EA	Moving Material Via Stairs 12" x 12" x 48" Container Per Floor Per Trip	1.56	
01 66 19 00-0034	EA	Moving Material Via Stairs 8.5" x 4.25" x 48" Container Per Floor Per Trip	0.39	
01 66 19 00-0035	EA	Moving Material Via Stairs 16" x 16" x 24" Container Per Floor Per Trip	1.38	
01 66 19 00-0036	EA	Moving Material Via Stairs 22" x 22" x 24" Container Per Floor Per Trip	2.63	
01 66 19 00-0037	EA	Moving Material Via Stairs 48" x 40" x 48" Container Per Floor Per Trip	12.50	
01 66 19 00-0038	EA	Moving Material Via Stairs 9" x 9" x 96" Container Per Floor Per Trip	1.76	
01 66 19 00-0039	EA	Moving Material Via Stairs 12" x 12" x 96" Container Per Floor Per Trip	3.13	
01 66 19 00-0040	EA	Moving Material Via Stairs 8.5" x 4.25" x 96" Container Per Floor Per Trip	0.78	
01 66 19 00-0041	EA	Moving Material Via Stairs 3.5 Gallon Round Container Per Floor Per Trip	0.18	
01 66 19 00-0042	EA	Moving Material Via Stairs 5 Gallon Round Container Per Floor Per Trip	0.26	
01 66 19 00-0043	EA	Moving Material Via Stairs 14 Gallon Round Container Per Floor Per Trip	0.73	
01 66 19 00-0044	EA	Moving Material Via Stairs 30 Gallon Round Container Per Floor Per Trip	1.56	
01 66 19 00-0045	EA	Moving Material Via Stairs 55 Gallon Round Container Per Floor Per Trip	2.87	

01 66 19 00-0046 Transfer Delivered Materials Distances Greater Than 125' *(01 66 19)*

Note: For moving delivered, owner supplied or existing materials in a building.

01 66 19 00-0047	CY	Transfer Delivered Materials Distances Greater Than 125', Per CY Of Material Per 125'	7.49	
01 66 19 00-0048	EA	Handling Material For Over 125' Per 4" x 24" x 48" Container Per 125' Segment	0.49	
01 66 19 00-0049	EA	Handling Material For Over 125' Per 6" x 24" x 48" Container Per 125' Segment	0.74	
01 66 19 00-0050	EA	Handling Material For Over 125' Per 9" x 24" x 48" Container Per 125' Segment	1.10	
01 66 19 00-0051	EA	Handling Material For Over 125' Per 12" x 24" x 48" Container Per 125' Segment	1.47	
01 66 19 00-0052	EA	Handling Material For Over 125' Per 4" x 48" x 48" Container Per 125' Segment	0.98	
01 66 19 00-0053	EA	Handling Material For Over 125' Per 6" x 48" x 48" Container Per 125' Segment	1.47	
01 66 19 00-0054	EA	Handling Material For Over 125' Per 9" x 48" x 48" Container Per 125' Segment	2.22	
01 66 19 00-0055	EA	Handling Material For Over 125' Per 9" x 9" x 48" Container Per 125' Segment	0.41	
01 66 19 00-0056	EA	Handling Material For Over 125' Per 12" x 12" x 48" Container Per 125' Segment	0.74	
01 66 19 00-0057	EA	Handling Material For Over 125' Per 8.5" x 4.25" x 48" Container Per 125' Segment	0.18	
01 66 19 00-0058	EA	Handling Material For Over 125' Per 16" x 16" x 24" Container Per 125' Segment	0.65	
01 66 19 00-0059	EA	Handling Material For Over 125' Per 22" x 22" x 24" Container Per 125' Segment	1.24	
01 66 19 00-0060	EA	Handling Material For Over 125' Per 48" x 40" x 48" Container Per 125' Segment	9.85	
01 66 19 00-0061	EA	Handling Material For Over 125' Per 9" x 9" x 96" Container Per 125' Segment	0.83	
01 66 19 00-0062	EA	Handling Material For Over 125' Per 12" x 12" x 96" Container Per 125' Segment	1.47	
01 66 19 00-0063	EA	Handling Material For Over 125' Per 8.5" x 4.25" x 96" Container Per 125' Segment	0.37	
01 66 19 00-0064	EA	Handling Material For Over 125' Per 3.5 Gallon Round Container Per 125' Segment	0.09	
01 66 19 00-0065	EA	Handling Material For Over 125' Per 5 Gallon Round Container Per 125' Segment	0.12	
01 66 19 00-0066	EA	Handling Material For Over 125' Per 14 Gallon Round Container Per 125' Segment	0.34	
01 66 19 00-0067	EA	Handling Material For Over 125' Per 30 Gallon Round Container Per 125' Segment	0.74	
01 66 19 00-0068	EA	Handling Material For Over 125' Per 55 Gallon Round Container Per 125' Segment	1.35	

01 66 19 00-0069 Transfer Demolition Debris Between Floors *(01 66 19)*

Note: Only for use with demolition tasks.

01 66 19 00-0070	CY	Transfer Demolition Debris Between Floors Via Stairs, Per Floor Note: Quantity equals material volume times bulk factor times number of floors traveled.	18.44	
01 66 19 00-0071	CY	Transfer Demolition Debris Between Floors Via Elevator, Per Trip Note: Quantity is not multiplied by number of floors traveled. Includes transfer of materials between elevators, if more than one bank of elevators is required.	11.99	

01 66 19 00-0072 Transfer Demolition Debris Distances Greater Than 125' *(01 66 19)*

Note: Only for use with demolition tasks.

01 66 19 00-0073	CY	Transfer Demolition Debris Distances Greater Than 125', Per CY Of Material Per 125'	7.49	

01 66 19 00-0074 Moving Furniture And Furnishings *(01 66 19)*

Note: To be used when contractor is required to move furniture and furnishings occupying 55% or more of the total floor space.

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 66 19 00-0075	SF	Removal, Transportation, Return And Reinstallation Of Office Furniture And Furnishings Note: Includes desks, tables, file cabinets, chairs, storage boxes, bookshelves, office equipment, computers, and other furniture and furnishings. Quantity equals total floor space.	1.19	

01 66 23 Off-Site Storage Facilities *(01 66)*

01 66 23 00-0001 Climate And Humidity Controlled Off-site Storage Facility *(01 66 23)*

01 66 23 00-0002	MO	5' x 10', Climate And Humidity Controlled Storage Facility	316.32	
01 66 23 00-0003	MO	10' x 10', Climate And Humidity Controlled Storage Facility	354.37	
01 66 23 00-0004	MO	10' x 20', Climate And Humidity Controlled Storage Facility	651.66	
01 66 23 00-0005	MO	15' x 15', Climate And Humidity Controlled Storage Facility	801.50	
01 66 23 00-0006	MO	10' x 30', Climate And Humidity Controlled Storage Facility	1,027.44	

01 70 Execution and Closeout Requirements *(01)*

01 71 Examination and Preparation *(01 70)*

01 71 13 Mobilization *(01 71)*

01 71 13 00-0001 Equipment Delivery, Pickup, Mobilization And Demobilization *(01 71 13)*
Note: Excludes flagman for traffic control where necessary. Per each mobilization delivery.

01 71 13 00-0002	EA	Equipment Delivery, Pickup, Mobilization And Demobilization Using A Rollback Flatbed Truck Note: Includes loading, tie-down of equipment, delivery of equipment, off loading on site, rigging, dismantling, loading for return and transporting away. For equipment such as trenchers, skid-steer loaders (bobcats), industrial warehouse forklifts, sweepers, scissor platform lifts, telescoping and articulating boom man lifts with up to 40' boom lengths, etc.	532.82	
01 71 13 00-0003	MI	>25 Miles, Equipment Delivery And Pickup Using A Rollback Flatbed Truck Note: Excludes first 25 miles.	5.69	
01 71 13 00-0004	EA	Equipment Delivery, Pickup, Mobilization And Demobilization Using A Tractor Trailer With Up To 53' Bed Note: Includes loading, tie-down of equipment, delivery of equipment, off loading on site, rigging, dismantling, loading for return and transporting away. For equipment such as bulldozers, motor scrapers, hydraulic excavators, gradalls, road graders, loader-backhoes, heavy-duty construction loaders, tractors, pavers, rollers, bridge finishers, straight mast construction forklifts, telescoping boom rough terrain construction forklifts, telescoping and articulating boom man lifts with >40' boom lengths, etc.	1,647.22	
01 71 13 00-0005	MI	>25 Miles, Equipment Delivery And Pickup Using A Tractor Trailer With Up To 53' Bed Note: Excludes first 25 miles.	13.18	

01 71 13 00-0006 Crane Delivery, Pickup, Mobilization And Demobilization *(01 71 13)*
Note: Includes delivery of equipment, off loading on site and rigging. Pick-up (return) includes dismantling, loading and transporting away. Excludes flagman for traffic control where necessary.

01 71 13 00-0007	EA	Up To 20 Ton Lift Move On/Off Cost, Hydraulic Crane Note: Includes delivery and pickup.	568.34	
		For >30 To 60 Miles Radius, Add	*142.09*	
		For >60 To 100 Miles Radius, Add	*227.34*	
01 71 13 00-0008	EA	>20 To 40 Ton Lift Move On/Off Cost, Hydraulic Crane Note: Includes delivery and pickup.	923.56	
		For >30 To 60 Miles Radius, Add	*230.89*	
		For >60 To 100 Miles Radius, Add	*369.42*	
01 71 13 00-0009	EA	>40 To 70 Ton Lift Move On/Off Cost, Hydraulic Crane Note: Includes delivery and pickup.	1,278.77	
		For >30 To 60 Miles Radius, Add	*319.69*	
		For >60 To 100 Miles Radius, Add	*511.51*	
01 71 13 00-0010	EA	>70 To 110 Ton Lift Move On/Off Cost, Hydraulic Crane Note: Includes delivery and pickup.	2,060.23	
		For >30 To 60 Miles Radius, Add	*515.06*	
		For >60 To 100 Miles Radius, Add	*824.09*	
01 71 13 00-0011	EA	>110 To 125 Ton Lift Move On/Off Cost, Hydraulic Crane Note: Includes delivery and pickup.	2,585.95	
		For >30 To 60 Miles Radius, Add	*646.49*	
		For >60 To 100 Miles Radius, Add	*1,034.38*	
01 71 13 00-0012	EA	>125 To 150 Ton Lift Move On/Off Cost, Hydraulic Crane Note: Includes delivery and pickup.	3,218.23	
		For >30 To 60 Miles Radius, Add	*804.56*	
		For >60 To 100 Miles Radius, Add	*1,287.29*	
01 71 13 00-0013	EA	>150 To 185 Ton Lift Move On/Off Cost, Hydraulic Crane Note: Includes delivery and pickup.	3,708.42	
		For >30 To 60 Miles Radius, Add	*927.11*	
		For >60 To 100 Miles Radius, Add	*1,483.37*	
01 71 13 00-0014	EA	>185 To 210 Ton Lift Move On/Off Cost, Hydraulic Crane Note: Includes delivery and pickup.	4,148.89	
		For >30 To 60 Miles Radius, Add	*1,037.22*	
		For >60 To 100 Miles Radius, Add	*1,659.56*	
01 71 13 00-0015	EA	75 Ton Lift Move On/Off Cost, Cable Controlled Lattice Boom Mechanical Crane Note: Includes delivery, rigging and pickup.	2,202.32	
		For >30 To 60 Miles Radius, Add	*550.58*	
		For >60 To 100 Miles Radius, Add	*880.93*	
01 71 13 00-0016	EA	100 Ton Lift Move On/Off Cost, Cable Controlled Lattice Boom Mechanical Crane Note: Includes delivery, rigging and pickup.	3,481.08	
		For >30 To 60 Miles Radius, Add	*870.27*	
		For >60 To 100 Miles Radius, Add	*1,392.43*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 71 13 00-0017	EA	125 Ton Lift Move On/Off Cost, Cable Controlled Lattice Boom Mechanical Crane Note: Includes delivery, rigging and pickup.	4,404.64	
		For >30 To 60 Miles Radius, Add	*1,101.16*	
		For >60 To 100 Miles Radius, Add	*1,761.86*	
01 71 13 00-0018	EA	150 Ton Lift Move On/Off Cost, Cable Controlled Lattice Boom Mechanical Crane Note: Includes delivery, rigging and pickup.	5,470.28	
		For >30 To 60 Miles Radius, Add	*1,367.57*	
		For >60 To 100 Miles Radius, Add	*2,188.11*	
01 71 13 00-0019	EA	200 Ton Lift Move On/Off Cost, Cable Controlled Lattice Boom Mechanical Crane Note: Includes delivery, rigging and pickup.	6,820.09	
		For >30 To 60 Miles Radius, Add	*1,705.02*	
		For >60 To 100 Miles Radius, Add	*2,728.04*	
01 71 13 00-0020	EA	250 Ton Lift Move On/Off Cost, Cable Controlled Lattice Boom Mechanical Crane Note: Includes delivery, rigging and pickup.	7,956.77	
		For >30 To 60 Miles Radius, Add	*1,989.19*	
		For >60 To 100 Miles Radius, Add	*3,182.71*	
01 71 13 00-0021	EA	300 Ton Lift Move On/Off Cost, Cable Controlled Lattice Boom Mechanical Crane Note: Includes delivery, rigging and pickup.	11,366.82	
		For >30 To 60 Miles Radius, Add	*2,841.71*	
		For >60 To 100 Miles Radius, Add	*4,546.73*	
01 71 13 00-0022	EA	500 Ton Lift Move On/Off Cost, Cable Controlled Lattice Boom Mechanical Crane Note: Includes delivery, rigging and pickup.	15,586.74	
		For >30 To 60 Miles Radius, Add	*3,896.69*	
		For >60 To 100 Miles Radius, Add	*6,234.70*	

01 71 23 Field Engineering *(01 71)*

01 71 23 16 Construction Surveying *(01 71 23)*

01 71 23 16-0001 Conventional Topographic Survey *(01 71 23 16)*

Note: The professional services include AutoCAD drafting and certification. The survey includes location of structures, walks, drives, parking, significant vegetation, utilities, etc. The area within building footprint is not to be considered as part of the acreage.

01 71 23 16-0002	ACR	Conventional Topographic Survey Of Clear Area With Few To No Obstacles	1,359.50
01 71 23 16-0003	ACR	Conventional Topographic Survey Of Clear Area With Medium Height Vegetation, Few Trees (<5% Buildings)	3,798.32
01 71 23 16-0004	ACR	Conventional Topographic Survey Of Clear Area With Few Structures, And/or Wooded (5-25% Buildings)	5,456.08
01 71 23 16-0005	ACR	Conventional Topographic Survey Of Developed Areas With Several Structures (25-65% Buildings)	8,192.50
01 71 23 16-0006	ACR	Conventional Topographic Survey Of Highly Developed Areas, Sidewalks, etc. (>65% Buildings)	10,252.24

01 71 23 16-0007 Property Lines Survey *(01 71 23 16)*

Note: Not to be added to tasks in the "Conventional Topographic Survey" section.

01 71 23 16-0008	LF	Survey Property Lines On Cleared Land	3.02
01 71 23 16-0009	LF	Survey Property Lines On Slightly Wooded Land	3.49
01 71 23 16-0010	LF	Survey Property Lines On Wooded Land	4.08

01 71 23 16-0011 Survey Monument *(01 71 23 16)*

01 71 23 16-0012	EA	3' Precast Survey Monument	213.90
		For Owner Furnished Monument, Deduct	*-85.16*
01 71 23 16-0013	EA	Precast Survey Monument Box With Cast Iron Frame And Cover	320.30
01 71 23 16-0014	EA	Riser Ring For Survey Monument	165.22
01 71 23 16-0015	EA	Reset/Relocate/Adjust Survey Monument Cover To Grade	255.46

01 71 23 16-0016 Facade Surveying *(01 71 23 16)*

01 71 23 16-0017	LF	Facade Survey And Reports (LF Of Facade x Number Of Floors)	8.29

01 71 23 16-0018 Utility Survey *(01 71 23 16)*

Note: This survey is only for the location of underground utilities.

01 71 23 16-0019	ACR	Survey Clear Area For Underground Utilities	6,982.22

01 71 23 16-0020 GPR Bridge Deck And Pavement Inspection *(01 71 23 16)*

01 71 23 16-0021 GPR Bridge Deck And Pavement Inspection Mobilization Fee *(01 71 23 16-0020)*

Note: One mobilization per project.

01 71 23 16-0022	EA	GPR Bridge Deck And Pavement Inspection Mobilization Fee	4,239.39

01 71 23 16-0023 Bridge Deck Delamination Survey, GPR Bridge Deck Inspection *(01 71 23 16-0020)*

Note: Each project will use the Survey Fee task with a quantity of 1 and one other task for the area of the bridge deck surveyed.

01 71 23 16-0024	EA	Survey Fee, Bridge Deck Delamination Survey, GPR Bridge Deck Inspection	3,090.15
01 71 23 16-0025	SF	Up To 5,000 SF, Bridge Deck Delamination Survey, GPR Bridge Deck Inspection	1.30
01 71 23 16-0026	SF	>5,000 To 10,000 SF, Bridge Deck Delamination Survey, GPR Bridge Deck Inspection	1.03
01 71 23 16-0027	SF	>10,000 To 25,000 SF, Bridge Deck Delamination Survey, GPR Bridge Deck Inspection	0.82
01 71 23 16-0028	SF	>25,000 To 50,000 SF, Bridge Deck Delamination Survey, GPR Bridge Deck Inspection	0.62
01 71 23 16-0029	SF	>50,000 To 100,000 SF, Bridge Deck Delamination Survey, GPR Bridge Deck Inspection	0.49
01 71 23 16-0030	SF	>100,000 To 250,000 SF, Bridge Deck Delamination Survey, GPR Bridge Deck Inspection	0.39
01 71 23 16-0031	SF	>250,000 SF, Bridge Deck Delamination Survey, GPR Bridge Deck Inspection	0.29

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 71 23 16-0032		Depth Of Reinforcement/Overlay Thickness Survey, GPR Bridge Deck Inspection *(01 71 23 16-0020)*		
		Note: Each project will use the Survey Fee task with a quantity of 1 and one other task for the area of the bridge deck surveyed.		
01 71 23 16-0033	EA	Survey Fee, Depth Of Reinforcement/Overlay Thickness Survey, GPR Bridge Deck Inspection	1,030.05	
01 71 23 16-0034	SF	Depth Of Reinforcement/Overlay Thickness Survey, GPR Bridge Deck Inspection	0.06	
01 71 23 16-0035		Freeze-Thaw Damage/Debonded Overlay Survey, GPR Bridge Deck Inspection *(01 71 23 16-0020)*		
		Note: Each project will use the Survey Fee task with a quantity of 1 and one other task for the area of the bridge deck surveyed.		
01 71 23 16-0036	EA	Survey Fee, Freeze-Thaw Damage/Debonded Overlay Survey, GPR Bridge Deck Inspection	1,030.05	
01 71 23 16-0037	SF	Up To 5,000 SF, Freeze-Thaw Damage/Debonded Overlay Survey, GPR Bridge Deck Inspection	0.47	
01 71 23 16-0038	SF	>5,000 To 10,000 SF, Freeze-Thaw Damage/Debonded Overlay Survey, GPR Bridge Deck Inspection	0.37	
01 71 23 16-0039	SF	>10,000 To 25,000 SF, Freeze-Thaw Damage/Debonded Overlay Survey, GPR Bridge Deck Inspection	0.29	
01 71 23 16-0040	SF	>25,000 To 50,000 SF, Freeze-Thaw Damage/Debonded Overlay Survey, GPR Bridge Deck Inspection	0.23	
01 71 23 16-0041	SF	>50,000 To 100,000 SF, Freeze-Thaw Damage/Debonded Overlay Survey, GPR Bridge Deck Inspection	0.19	
01 71 23 16-0042	SF	>100,000 To 250,000 SF, Freeze-Thaw Damage/Debonded Overlay Survey, GPR Bridge Deck Inspection	0.14	
01 71 23 16-0043	SF	>250,000 SF, Freeze-Thaw Damage/Debonded Overlay Survey, GPR Bridge Deck Inspection	0.10	
01 71 23 16-0044		Pavement Structure And Thickness Measurement, GPR Pavement Inspection *(01 71 23 16-0020)*		
		Note: Each project will use one task for the length of the pavement surveyed.		
01 71 23 16-0045	LM	Up To 4 Lane Miles (LM), Pavement Structure And Thickness Measurement, GPR Pavement Inspection	7,659.45	
01 71 23 16-0046	LM	>4 To 9 Lane Miles (LM), Pavement Structure And Thickness Measurement, GPR Pavement Inspection	3,339.42	
01 71 23 16-0047	LM	>9 To 49 Lane Miles (LM), Pavement Structure And Thickness Measurement, GPR Pavement Inspection	2,486.54	
01 71 23 16-0048	LM	>49 To 99 Lane Miles (LM), Pavement Structure And Thickness Measurement, GPR Pavement Inspection	1,357.61	
01 71 23 16-0049	LM	>99 Lane Miles (LM), Pavement Structure And Thickness Measurement, GPR Pavement Inspection	1,067.13	
01 71 23 16-0050		Pavement Thickness Contour (Mapping), GPR Pavement Inspection *(01 71 23 16-0020)*		
		Note: Each project will use one task for the length of the pavement surveyed.		
01 71 23 16-0051	LM	Up To 4 Lane Miles (LM), Pavement Thickness Contour (Mapping), GPR Pavement Inspection	9,746.33	
01 71 23 16-0052	LM	>4 To 9 Lane Miles (LM), Pavement Thickness Contour (Mapping), GPR Pavement Inspection	4,583.72	
01 71 23 16-0053	LM	>9 To 49 Lane Miles (LM), Pavement Thickness Contour (Mapping), GPR Pavement Inspection	3,481.57	
01 71 23 16-0054	LM	>49 To 99 Lane Miles (LM), Pavement Thickness Contour (Mapping), GPR Pavement Inspection	1,950.91	
01 71 23 16-0055	LM	>99 Lane Miles (LM), Pavement Thickness Contour (Mapping), GPR Pavement Inspection	1,543.01	
01 71 23 16-0056		Pavement Void Detection (Mapping), GPR Pavement Inspection *(01 71 23 16-0020)*		
		Note: Each project will use one task for the length of the pavement surveyed.		
01 71 23 16-0057	LM	Up To 4 Lane Miles (LM), Pavement Void Detection (Mapping), GPR Pavement Inspection	11,573.64	
01 71 23 16-0058	LM	>4 To 9 Lane Miles (LM), Pavement Void Detection (Mapping), GPR Pavement Inspection	5,671.46	
01 71 23 16-0059	LM	>9 To 49 Lane Miles (LM), Pavement Void Detection (Mapping), GPR Pavement Inspection	4,350.93	
01 71 23 16-0060	LM	>49 To 99 Lane Miles (LM), Pavement Void Detection (Mapping), GPR Pavement Inspection	2,470.06	
01 71 23 16-0061	LM	>99 Lane Miles (LM), Pavement Void Detection (Mapping), GPR Pavement Inspection	1,957.10	
01 71 23 16-0062		Drone Survey (Extreme Aerial Productions) *(01 71 23 16)*		
		Note: Thermographic services to electrical line grid inspections.		
01 71 23 16-0063		Mobilization For Drone Surveying *(01 71 23 16-0062)*		
01 71 23 16-0064	EA	Mobilization For Up To 1000 Acres, Drone Survey/Topography 1/10 Or Better, Post Process Kinematic (PPK) Fixed Wing	276.92	
01 71 23 16-0065	EA	Mobilization For > 1000 Acres Drone Survey/Topography 1/10 Or Better, Post Process Kinematic (PPK) Fixed Wing	692.29	
01 71 23 16-0066	EA	Mobilization For Up To 400 Acres, Drone Survey/Topography 1/10 Or Better, Post Process Kinematic (PPK) Hexacopter	184.61	
01 71 23 16-0067	EA	Mobilization For Drone Road Survey For Topography/Progression/Inspection	369.22	
01 71 23 16-0068	EA	Mobilization For Drone Survey Stockpile	184.61	
01 71 23 16-0069	EA	Mobilization For Drone Inspection	184.61	
01 71 23 16-0070	EA	Mobilization For Qualitative Drone Thermal Inspection	369.22	
01 71 23 16-0071	EA	Mobilization For Quantitative Drone Thermal Inspection	461.52	
01 71 23 16-0072	EA	Mobilization For Drone Agricultural Multispectral Survey	738.44	
01 71 23 16-0073	EA	Mobilization For Drone Building Inspection/Scan/Thermal	553.83	
01 71 23 16-0074	EA	Mobilization For Drone 3D Modelling	461.52	
01 71 23 16-0075	EA	Mobilization For Drone Spraying Crops Or Sanitation	830.74	
01 71 23 16-0076	EA	Mobilization For Drone Video Progression/Marketing	184.61	
01 71 23 16-0077	EA	Mobilization For Drone Pictures Progression/Marketing	184.61	
01 71 23 16-0078	EA	Mobilization For Drone Training, Flying, Test Prep, Equipment Checks	184.61	
01 71 23 16-0079	EA	Mobilization For Drone Accident Reconstruction	184.61	
01 71 23 16-0080	EA	Mobilization For Drone Landfill Survey	276.92	
01 71 23 16-0081	EA	Mobilization For Drone Event Security Using Tethered Drones	369.22	
01 71 23 16-0082	EA	Mobilization For Drone Emergency Response	923.05	
01 71 23 16-0083	EA	Mobilization For Drone Cell Tower Inspection	276.92	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 71 23 16-0084		Drone Surveying *(01 71 23 16-0062)*		
01 71 23 16-0085	HR	Up To 1000 Acres, Drone Survey/Topography 1/10 Or Better, Post Process Kinematic (PPK) Fixed Wing Note: 3 hour minimum	673.83	
		For Visual Observation, Add	*184.61*	
		For Additional Manpower, Add	*184.61*	
01 71 23 16-0086	HR	> 1000 Acres, Drone Survey/Topography 1/10 Or Better, Post Process Kinematic (PPK) Fixed Wing	858.44	
		For Visual Observation, Add	*276.92*	
		For Additional Manpower, Add	*221.53*	
01 71 23 16-0087	HR	Up To 400 Acres, Drone Survey/Topography 1/10 Or Better, Post Process Kinematic (PPK) Hexacopter Note: 3 hour minimum	553.83	
		For Visual Observation, Add	*184.61*	
		For Additional Manpower, Add	*184.61*	
01 71 23 16-0088	HR	Drone Road Survey For Topography/Progression/Inspection Note: 3 hour minimum	646.14	
		For Visual Observation, Add	*276.92*	
		For Additional Manpower, Add	*184.61*	
01 71 23 16-0089	HR	Drone Survey Stockpile Note: 3 hour minimum	461.52	
		For Visual Observation, Add	*184.61*	
		For Additional Manpower, Add	*184.61*	
01 71 23 16-0090	HR	Drone Inspection Note: 3 hour minimum	646.14	
		For Visual Observation, Add	*184.61*	
		For Additional Manpower, Add	*184.61*	
01 71 23 16-0091	HR	Qualitative Drone Thermal Inspection Note: 5 hour minimum	738.44	
		For Visual Observation, Add	*276.92*	
		For Additional Manpower, Add	*184.61*	
01 71 23 16-0092	HR	Quantitative Drone Thermal Inspection Note: 5 hour minimum	1,107.66	
		For Visual Observation, Add	*276.92*	
		For Additional Manpower, Add	*184.61*	
01 71 23 16-0093	HR	Drone Agricultural Multispectral Survey Note: 6 hour minimum	830.74	
		For Visual Observation, Add	*184.61*	
		For Additional Manpower, Add	*184.61*	
01 71 23 16-0094	HR	Drone Building Inspection/Scan/Thermal Note: 3 hour minimum	738.44	
		For Visual Observation, Add	*276.92*	
		For Additional Manpower, Add	*184.61*	
01 71 23 16-0095	HR	Drone 3D Modelling Note: 3 hour minimum	553.83	
		For Visual Observation, Add	*276.92*	
		For Additional Manpower, Add	*184.61*	
01 71 23 16-0096	HR	Drone Spraying Crops Or Sanitation Note: 3 hour minimum	738.44	
		For Visual Observation, Add	*230.76*	
		For Additional Manpower, Add	*184.61*	
01 71 23 16-0097	HR	Drone Video Progression/Marketing Note: 2 hour minimum	369.22	
		For Visual Observation, Add	*184.61*	
		For Additional Manpower, Add	*184.61*	
01 71 23 16-0098	HR	Drone Pictures Progression/Marketing Note: 2 hour minimum	276.92	
		For Visual Observation, Add	*184.61*	
		For Additional Manpower, Add	*184.61*	
01 71 23 16-0099	HR	Drone Training, Flying, Test Prep, Equipment Checks Note: 3 hour minimum	553.83	
01 71 23 16-0100	HR	Drone Accident Reconstruction Note: 2 hour minimum	830.74	
		For Visual Observation, Add	*184.61*	
		For Additional Manpower, Add	*184.61*	
01 71 23 16-0101	HR	Drone Landfill Survey Note: 3 hour minimum	673.83	
		For Visual Observation, Add	*184.61*	
		For Additional Manpower, Add	*184.61*	
01 71 23 16-0102	HR	Drone Event Security Using Tethered Drones Note: 3 hour minimum	461.52	
		For Visual Observation, Add	*184.61*	
		For Additional Manpower, Add	*184.61*	
01 71 23 16-0103	HR	Drone Emergency Response Note: 3 hour minimum	461.52	
		For Visual Observation, Add	*276.92*	
		For Additional Manpower, Add	*184.61*	
01 71 23 16-0104	HR	Drone Cell Tower Inspection Note: 3 hour minimum	461.52	
		For Visual Observation, Add	*230.76*	
		For Additional Manpower, Add	*184.61*	
01 71 23 16-0105		Utilization And Deliverables For Drone Surveying *(01 71 23 16-0062)*		
01 71 23 16-0106	Day	Utilization Of GPS Ground Control For Drone Surveying	461.52	
01 71 23 16-0107	Day	Utilization Of GPS Base Station Per Day For Drone Surveying	461.52	
01 71 23 16-0108	HR	Processing And Data Deliverables And Reporting For Drone Surveying Note: 2 hour minimum	184.61	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 71 23 16-0109	HR	Processing And Data Deliverables And Reporting Of Thermal For Drone Surveying Note: 3 hour minimum	369.22	

01 71 23 16-0110 Travel, Waivers, And Editing For Drone Surveying *(01 71 23 16-0062)*

01 71 23 16-0111	MI	Travel Over 100 Miles For Drone Surveying Note: For additional miles over 100	1.06	
01 71 23 16-0112	EA	Overnight Stay Per Person For Drone Surveying	230.76	
01 71 23 16-0113	EA	Waiver Utilization B, C, D, And E For Drone Surveying Note: Restricted airspace	92.30	
01 71 23 16-0114	EA	Night Waiver For Drone Surveying	120.00	
01 71 23 16-0115	EA	Flying Over People Waiver For Drone Surveying	184.61	
01 71 23 16-0116	EA	Beyond Visual Line Of Sight (BVLOS) Waiver For Drone Surveying	923.05	
01 71 23 16-0117	HR	Editing Video For Drone Surveying Note: 2 hour minimum	184.61	
01 71 23 16-0118	HR	Editing Pictures For Drone Surveying Note: 2 hour minimum	92.30	
01 71 23 16-0119	HR	Custom Post Processing For Drone Surveying Note: 3 hour minimum	276.92	

01 71 36 Non-Destructive Concrete Examination *(01 71)*

01 71 36 00-0001 Electromagnetic Survey *(01 71 36)*

Note: To locate voids, prior to moving heavy machinery to an area of concern, to locate reinforcing bars, conduits, pipes, etc., prior to core drilling or cutting existing concrete, masonry or asphalt, to locate underground utilities, underground storage tanks, etc. Electromagnetic survey includes Subsurface Interface Radar (SIR) and/or Ground Penetrating Radar (GPR).

01 71 36 00-0002 Electromagnetic (SIR/GPR) Survey *(01 71 36 00-0001)*

01 71 36 00-0003	EA	Up To 1 Hour On Site, Electromagnetic (SIR/GPR) Survey, Earth, Concrete, Masonry Or Asphalt	1,191.54
01 71 36 00-0004	EA	>1 To 4 Hours On Site, Electromagnetic (SIR/GPR) Survey, Earth, Concrete, Masonry Or Asphalt	1,787.31
01 71 36 00-0005	EA	>4 To 8 Hours On Site, Electromagnetic (SIR/GPR) Survey, Earth, Concrete, Masonry Or Asphalt	3,574.62

01 71 36 00-0006 Reports And Mapping For Electromagnetic (SIR/GPR) Surveys *(01 71 36 00-0001)*

01 71 36 00-0007	EA	Standard Report For Electromagnetic (SIR/GPR) Survey, Earth, Concrete, Masonry Or Asphalt Note: Includes a detailed description of the scope of work, inspection methods, and equipment used. Also includes visuals such as site locations, images of data, and site photos.	397.18	
01 71 36 00-0008	EA	GPS Mapping Of Located Utilities/Items For Electromagnetic (SIR/GPR) Survey, Earth, Concrete, Masonry Or Asphalt Note: Includes GPS coordinates of located items and reference items.	794.36	
01 71 36 00-0009	EA	CAD Mapping Of Located Utilities/Items For Electromagnetic (SIR/GPR) Survey, Earth, Concrete, Masonry Or Asphalt Note: Includes additions to the owner provided CAD drawing.	1,787.31	

01 74 Cleaning and Waste Management *(01 70)*

01 74 13 Progress Cleaning *(01 74)*

Note: For use on existing areas other than where actual work is to be performed where ordered by the owner. Daily cleanup and final cleanup is included in the contractor's adjustment factor.

01 74 13 00-0001 General *(01 74 13)*

01 74 13 00-0002	CSF	Clean Miscellaneous Surfaces, Wipe Down With Mild Detergent	19.18	
01 74 13 00-0003	CY	Collect Existing Debris And Load Into Truck Or Dumpster Note: Per CY of debris removed.	28.10	
01 74 13 00-0004	CSF	Wet Mop, Disinfect And High Efficiency Particulate Air (HEPA) Vacuum Floors (Three Step Process) Note: For use in contained areas for Class III or IV infection control.	24.09	

01 74 13 00-0005 Window Washing *(01 74 13)*

Note: Includes scaffolding, platform lift, swing scaffold, boatswains chair or other required equipment.

01 74 13 00-0006	SF	Wash Exterior Windows On First Floor Without Window Guards	1.06	
01 74 13 00-0007	SF	Wash Exterior Windows Above First Floor Without Window Guard	3.00	
01 74 13 00-0008	SF	Wash Interior Windows Without Window Guard	1.60	
01 74 13 00-0009	SF	Wash Exterior Windows On First Floor With Window Guards	2.00	
01 74 13 00-0010	SF	Wash Exterior Windows Above First Floor With Window Guard	3.94	
01 74 13 00-0011	SF	Wash Interior Windows With Window Guard	2.55	

01 74 16 Site Maintenance *(01 74)*

01 74 16 00-0001 Parking Lot, Roads And Pathway Maintenance *(01 74 16)*

Note: These tasks shall be used for maintenance of existing roads and walks only as requested by the owner. Tasks not to be used in conjunction with related installation/demolition tasks.

01 74 16 00-0002 Parking Lot, Road, And Street Sweeping *(01 74 16 00-0001)*

01 74 16 00-0003	MSF	Sweep Parking Lot, With Street Sweeper	25.80	
01 74 16 00-0004	MSF	Sweeper/Vacuum/Sprayer For Parking Lots, Streets And Roads	30.95	

01 74 16 00-0005 Runway Sweeping *(01 74 16 00-0001)*

01 74 16 00-0006	MSF	Sweep Runway, With Street Sweep	38.69	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

01 74 19 Construction Waste Management and Disposal *(01 74)*

Note: Tasks in this section shall be used as directed by owner.

01 74 19 00-0001 Debris Chutes *(01 74 19)*

Note: Includes hopper sections and entry sections. Used as required for buildings of all heights.

01 74 19 00-0002 Steel Temporary Debris Chutes *(01 74 19 00-0001)*

01 74 19 00-0003	LF	18" Diameter, Steel Temporary Debris Chute	46.10	
01 74 19 00-0004	LF	30" Diameter, Steel Temporary Debris Chute	69.70	

01 74 19 00-0005 Plastic Temporary Debris Chutes *(01 74 19 00-0001)*

01 74 19 00-0006	LF	24" Diameter, Plastic Temporary Debris Chute	18.24	
		For Steel Liner, Add	*3.56*	
01 74 19 00-0007	LF	30" Diameter, Plastic Temporary Debris Chute	20.92	
		For Steel Liner, Add	*4.09*	
01 74 19 00-0008	LF	36" Diameter, Plastic Temporary Debris Chute	23.58	
		For Steel Liner, Add	*4.61*	

01 74 19 00-0009 Wood Temporary Debris Chutes *(01 74 19 00-0001)*

01 74 19 00-0010	LF	4' x 4', Wood Temporary Debris Chute Note: Includes fabrication and installation.	35.73	

01 74 19 00-0011 Construction Dumpsters Rental *(01 74 19)*

Note: Includes service to delivery and pick-up of dumpster, hauling of debris, rental of dumpster and all applicable non-hazardous disposal fees. Cost of "each" is based on each pick-up. Use modifier for excess tons up to legal state limit. Unacceptable materials include: aerosol cans, all liquids, animals, antifreeze, appliances, asbestos, barrels, batteries, chemical products, computers, contaminated oils (mixed with solvents, gasoline, etc.), dirt, fluorescent tubes, hazardous waste, herbicides and pesticides, industrial waste, lubricating/hydraulic oil, mattresses, medical waste, microwaves, monitors, motor oil, oil filters, other flammable liquids, paint (except completely dried latex paint cans, no liquids), petroleum-contaminated soil/lead paint chips, propane tanks, radioactive material, railroad ties, solvents, televisions, tires, and transmission oil.

01 74 19 00-0012	EA	10 CY Dumpster (1.5 Ton) "Construction Debris" Note: Includes delivery of dumpster, rental cost, pick-up cost, hauling, and disposal fee. Non-hazardous material.	498.48	
		For Each Ton Over Indicated Amount, Add	*99.00*	
01 74 19 00-0013	EA	15 CY Dumpster (2 Ton) "Construction Debris" Note: Includes delivery of dumpster, rental cost, pick-up cost, hauling, and disposal fee. Non-hazardous material.	575.64	
		For Each Ton Over Indicated Amount, Add	*99.00*	
01 74 19 00-0014	EA	20 CY Dumpster (3 Ton) "Construction Debris" Note: Includes delivery of dumpster, rental cost, pick-up cost, hauling, and disposal fee. Non-hazardous material.	652.55	
		For Each Ton Over Indicated Amount, Add	*99.00*	
01 74 19 00-0015	EA	30 CY Dumpster (4 Ton) "Construction Debris" Note: Includes delivery of dumpster, rental cost, pick-up cost, hauling, and disposal fee. Non-hazardous material.	766.02	
		For Each Ton Over Indicated Amount, Add	*99.00*	
01 74 19 00-0016	EA	40 CY Dumpster (6 Ton) "Construction Debris" Note: Includes delivery of dumpster, rental cost, pick-up cost, hauling, and disposal fee. Non-hazardous material.	990.88	
		For Each Ton Over Indicated Amount, Add	*99.00*	
01 74 19 00-0017	EA	10 CY Low-Boy Dumpster "Concrete Or Asphalt Only" Note: Includes delivery of dumpster, rental cost, pick-up cost, hauling, and disposal fee. Concrete or asphalt only.	869.15	
01 74 19 00-0018	EA	15 CY Low-Boy Dumpster Clean Recyclable Note: For clean dirt, rock, concrete brick or asphalt with no trash or organics. Includes service to deliver and pick-up dumpster, hauling, rental and disposal fee.	948.42	
01 74 19 00-0019	EA	15 CY Low-Boy Dumpster Mixed Recyclable Note: For mixed dirt, rock, concrete brick or asphalt with no trash or organics. Includes service to deliver and pick-up dumpster, hauling, rental and disposal fee.	1,019.20	

01 74 19 00-0020 Concrete Washout Service *(01 74 19)*

01 74 19 00-0021	MO	Rampless Concrete Washout Bin Note: Includes delivery.	561.57	
01 74 19 00-0022	MO	Ramped Concrete Washout Bin Note: Includes delivery.	673.89	
01 74 19 00-0023	EA	Interim Vacuum Service, Concrete Washout Bin Note: Includes vacuum and recycle excess clear liquid from the unfilled bin to allow additional space for washout material.	656.49	
01 74 19 00-0024	EA	Vacuum, Pickup, Swap And Dump, Concrete Washout Bin Note: Includes vacuum the liquid from the full bin and pick up the bin, and recycle all material. An empty bin will be left at the site if the project is not completed.	1,422.40	

01 74 19 00-0025 Debris Processing Fee *(01 74 19)*

01 74 19 00-0026 Material Recycling Fees *(01 74 19 00-0025)*

Note: Not to be used with Dumpster Tasks which includes the Landfill Dump Fee. Excludes hauling.

01 74 19 00-0027	CY	Drop-Off Asphalt At Recycling Center	17.38	
01 74 19 00-0028	CY	Drop-Off Non-Reinforced Concrete At Recycling Center	23.28	
01 74 19 00-0029	CY	Drop-Off Reinforced Concrete At Recycling Center	34.92	
01 74 19 00-0030	CY	Drop-Off Brick Or Block At Recycling Center	30.27	
01 74 19 00-0031	CY	Drop-Off Dirt At Recycling Center	33.76	
01 74 19 00-0032	CY	Drop-Off Dimensional Lumber At Recycling Center	16.30	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 74 19 00-0033		Landfill Dump Fees *(01 74 19 00-0025)* Note: Does not apply when material is transferred to owner's site or facility, or with use of dumpsters. Excludes hauling. See CSI section 01 74 19 00-0039 for hauling.		
01 74 19 00-0034	CY	Traditional Building Construction Materials Landfill Dump Fee	15.49	
01 74 19 00-0035	TON	Traditional Building Construction Materials, Landfill Dump Fee	67.52	
01 74 19 00-0036	CY	Trees, Stumps And Brush, Landfill Dump Fee	18.65	
01 74 19 00-0037	CY	Hazardous Materials And Rubbish Landfill Dump Fee Note: Includes regulated waste such as paint cans, refrigerators/freezers, air conditioners, smoke detectors, batteries, etc.	44.47	
01 74 19 00-0038	CY	Asphalt, Concrete, Gravel And Subgrade Material, Landfill Dump Fee	31.60	
01 74 19 00-0039		Hauling *(01 74 19)* Note: Includes driver and equipment, ten (10) to fifteen (15) minutes load time, time for travel, dump time and return (roundtrip). The task quantity is the number of miles to the disposal site/transfer station (one way mileage) times the number of cubic yards being transported. For example, to haul 8 CY to a site 14 miles away, the quantity is calculated as follows: 14 miles x 8 CY = 112 CYM. Use both hauling tasks for distances greater than 15 miles. To haul 28 CY to a site 32 miles away, the quantity for the task to haul the first 15 miles is calculated: 15 miles x 28 CY = 420 CYM. The quantity for the additional hauling task over the first 15 miles is calculated: 32 total miles less 15 initial miles equals 17 miles x 28 CY = 476 CYM.		
01 74 19 00-0040	CYM	Hauling On Paved Roads, First 15 Miles	1.07	
01 74 19 00-0041	CYM	Hauling On Paved Roads, Miles Over Initial 15 Miles	0.72	
01 74 19 00-0042	CYM	Hauling On Unimproved Roads, First 15 Miles	1.65	
01 74 19 00-0043	CYM	Hauling On Unimproved Roads, Miles Over Initial 15 Miles	1.29	
01 74 23		**Final Cleaning** *(01 74)*		
01 74 23 00-0001		Cleaning Of Glass *(01 74 23)*		
01 74 23 00-0002	CSF	Cleaning Of Existing Glass Surfaces	32.73	

01 90 Life Cycle Activities *(01)*

01 91 Commissioning *(01 90)*

01 91 13 General Commissioning Requirements *(01 91)*

CSI	UOM	DESCRIPTION	MINOR TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
01 91 13 00-0001		Commissioning Of Systems *(01 91 13)* Note: For use with commissioning of mechanical and electrical systems.		
01 91 13 00-0002	HR	Commissioning - Fire Protection Sprinkler Systems	208.84	
01 91 13 00-0003	HR	Commissioning - Plumbing Systems	257.10	
01 91 13 00-0004	HR	Commissioning - HVAC/Mechanical Systems	289.24	
01 91 13 00-0005	HR	Commissioning - Electrical/Communications/Fire Alarms/Security Systems	224.06	

END OF SECTION 01

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

THIS PAGE INTENTIONALLY LEFT BLANK

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

02 Existing Conditions

02 20 Assessment *(02)*

02 25 Existing Material Assessment *(02 20)*

02 25 16 Existing Concrete, Masonry or Asphalt Assessment *(02 25)*

See CSI section 01 71 36 00-0000 for non-destructive concrete examination.

02 25 16 13 Concrete Assessment Drilling *(02 25 16)*

See CSI section 01 71 36 00-0000 for non-destructive concrete examination.

02 30 Subsurface Investigation *(02)*

02 32 Geotechnical Investigations *(02 30)*

02 32 13 Subsurface Drilling and Sampling *(02 32)*

See CSI section 01 45 23 00-0000 for testing and lab reports.

02 32 13 00-0001 Mobilization Of Drilling Crew *(02 32 13)*

02 32 13 00-0002	EA	Mobilization Of Drilling Crew	1,323.79

02 32 13 00-0003 Auger Borings *(02 32 13)*

02 32 13 00-0004	LF	Standard Auger Hole With Split Spoon Sample At 5' Intervals	39.87

02 32 13 00-0005 Cased Borings In Earth, With Samples *(02 32 13)*

Note: All types of soils.

02 32 13 00-0006	LF	2-1/2" Diameter Cased Borings In Earth, With Samples	101.79
02 32 13 00-0007	LF	4" Diameter Cased Borings In Earth, With Samples	174.08

02 32 13 00-0008 Drilling In Rock, BW Core (2.125") *(02 32 13)*

02 32 13 00-0009	LF	Drill In Rock, BW Core, With Casing Note: Includes sampling.	107.73
02 32 13 00-0010	EA	Drill In Rock, With BW Core Boxes	10.16

02 32 13 00-0011 Drilling In Rock, NW Core (2.98") *(02 32 13)*

02 32 13 00-0012	LF	Drill In Rock, NW Core, With Casing Note: Includes sampling.	139.28
02 32 13 00-0013	EA	Drill In Rock, With NW Core Boxes	11.68

02 32 13 00-0014 Test Pits For Boring Activities *(02 32 13)*

Note: Excludes backfill. See CSI section 31 23 16 36-0016 for backfill.

02 32 13 00-0015 Backhoe Dug Test Pits *(02 32 13 00-0014)*

02 32 13 00-0016	CY	Excavation For Test Pit, Light Material, Backhoe Excavation	76.85
02 32 13 00-0017	CY	Excavation For Test Pits, Medium Material, Backhoe Excavation	89.66
02 32 13 00-0018	CY	Excavation For Test Pit, Heavy Material, Backhoe Excavation	119.54

02 32 13 00-0019 Hand-Dug Test Pits *(02 32 13 00-0014)*

02 32 13 00-0020	CY	Excavation For Test Pit, Light Soil, Hand Excavation	213.10
02 32 13 00-0021	CY	Excavation For Test Pit, Heavy Soil, Hand Excavation	383.58

02 32 13 00-0022 Shelby Tube Sampling *(02 32 13)*

02 32 13 00-0023	EA	Shelby Tube Sampling	57.38
02 32 13 00-0024	EA	Penetration Test	46.75

02 32 13 00-0025 Grouting *(02 32 13)*

02 32 13 00-0026	VLF	Boreholes	10.88

02 32 19 Exploratory Excavations *(02 32)*

02 32 19 00-0001 Machine Dug Test, Entry/Exit Pits *(02 32 19)*

02 32 19 00-0002	CY	Test, Entry/Exit Pit Excavation, Backfill And Compaction, By Machine, Unpaved Areas	92.23
02 32 19 00-0003	CY	Test, Entry/Exit Pit Excavation, Backfill And Compaction, By Machine, Paved Areas, Non-Arterial and Non-State Roads	176.78
02 32 19 00-0004	CY	Test, Entry/Exit Pit Excavation, Backfill And Compaction, By Machine, Paved Areas - Arterial and State Roads	230.58

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 32 19 00-0005		**Hydro Excavation** *(02 32 19)* Note: Assumes on-site disposal. See CSI section 01 22 23 00-1735 for additional water per day, 01 71 13 00-0000 for additional support equipment mobilization, 01 74 19 00-0033 for off-site disposal fee of material, 01 74 19 00-0039 for hauling excavated soil from site.		
02 32 19 00-0006	EA	Minimum Charge For Hydro Excavation Note: For projects where the total charge is less than the "Hydro Excavation Minimum" cost, use this task exclusively. This task should not be used in conjunction with any other tasks in this section.	1,665.46	
02 32 19 00-0007	EA	600 to 750 Gallon Water Capacity, 6 To 9 CY Soil Capacity, Hydro Excavation, Mobilization/Demobilization Per Day Note: Includes initial water.	951.69	
02 32 19 00-0008	EA	1,200 To 1,500 Gallon Water Capacity, 12 To 15 CY Soil Capacity, Hydro Excavation, Mobilization/Demobilization Per Day Note: Includes initial water	1,189.62	
02 32 19 00-0009	EA	Move And Set-up At Different Access/Location, Hydro Excavation	118.96	
02 32 19 00-0010	CY	Hydro Excavation, Normal Soil Conditions (Hydro-Vac Truck) Note: Normal soil conditions consist of silt, sand and gravel.	99.22	
02 32 19 00-0011	CY	Hydro Excavation, Adverse Soil Conditions (Hydro-Vac Truck) Note: Adverse soil conditions consist of clay, glacial till and rocks.	158.70	

02 40 Demolition and Structure Moving *(02)*

02 41 Demolition *(02 40)*

02 41 13 Selective Site Demolition *(02 41)*

02 41 13 13 Paving Removal *(02 41 13)*

02 41 13 13-0001		**By Machine, Break-up And Leave In Place Bituminous And Concrete Paving** *(02 41 13 13)* Note: Includes slabs, pavements, sidewalks and base courses. Includes work around obstacles. These tasks are not to be used in conjunction with any other loading activities or other break-up tasks. Excludes saw cutting (where required) and disposal. See CSI section 02 41 13 13-0018 for breaking-up, removal and loading as a combined operation, 02 41 19 13-0001 for saw cutting.		
02 41 13 13-0002	SY	Up To 3" By Machine, Break-up And Leave In Place Bituminous Paving	8.17	
		For >500 To 1,000, Deduct	*-0.82*	
		For >1,000 To 2,500, Deduct	*-1.47*	
		For >2,500 To 5,000, Deduct	*-2.12*	
		For >5,000 To 10,000, Deduct	*-2.78*	
		For >10,000, Deduct	*-3.43*	
02 41 13 13-0003	SY	>3" To 6" By Machine, Break-up And Leave In Place Bituminous Paving	12.26	
		For >500 To 1,000, Deduct	*-1.23*	
		For >1,000 To 2,500, Deduct	*-2.21*	
		For >2,500 To 5,000, Deduct	*-3.19*	
		For >5,000 To 10,000, Deduct	*-4.17*	
		For >10,000, Deduct	*-5.15*	
02 41 13 13-0004	SY	>6" To 9" By Machine, Break-up And Leave In Place Bituminous Paving	16.35	
		For >500 To 1,000, Deduct	*-1.64*	
		For >1,000 To 2,500, Deduct	*-2.94*	
		For >2,500 To 5,000, Deduct	*-4.25*	
		For >5,000 To 10,000, Deduct	*-5.56*	
		For >10,000, Deduct	*-6.87*	
02 41 13 13-0005	SY	Up To 3" By Machine, Break-up And Leave In Place Concrete Paving	15.50	
		For >500 To 1,000, Deduct	*-1.55*	
		For >1,000 To 2,500, Deduct	*-2.79*	
		For >2,500 To 5,000, Deduct	*-4.03*	
		For >5,000 To 10,000, Deduct	*-5.27*	
		For >10,000, Deduct	*-6.51*	
02 41 13 13-0006	SY	>3" To 6" By Machine, Break-up And Leave In Place Concrete Paving	21.89	
		For >500 To 1,000, Deduct	*-2.19*	
		For >1,000 To 2,500, Deduct	*-3.94*	
		For >2,500 To 5,000, Deduct	*-5.69*	
		For >5,000 To 10,000, Deduct	*-7.44*	
		For >10,000, Deduct	*-9.19*	
02 41 13 13-0007	SY	>6" To 9" By Machine, Break-up And Leave In Place Concrete Paving	31.00	
		For >500 To 1,000, Deduct	*-3.10*	
		For >1,000 To 2,500, Deduct	*-5.58*	
		For >2,500 To 5,000, Deduct	*-8.06*	
		For >5,000 To 10,000, Deduct	*-10.54*	
		For >10,000, Deduct	*-13.02*	
02 41 13 13-0008	SY	>9" To 14" By Machine, Break-up And Leave In Place Concrete Paving	43.77	
		For >500 To 1,000, Deduct	*-4.38*	
		For >1,000 To 2,500, Deduct	*-7.88*	
		For >2,500 To 5,000, Deduct	*-11.38*	
		For >5,000 To 10,000, Deduct	*-14.88*	
		For >10,000, Deduct	*-18.38*	
02 41 13 13-0009	SY	>14" To 19" By Machine, Break-up And Leave In Place Concrete Paving	57.23	
		For >500 To 1,000, Deduct	*-5.72*	
		For >1,000 To 2,500, Deduct	*-10.30*	
		For >2,500 To 5,000, Deduct	*-14.88*	
		For >5,000 To 10,000, Deduct	*-19.46*	
		For >10,000, Deduct	*-24.04*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 41 13 13-0010	SY	>19" To 24" By Machine, Break-up And Leave In Place Concrete Paving	74.40	
		For >500 To 1,000, Deduct	*-7.44*	
		For >1,000 To 2,500, Deduct	*-13.39*	
		For >2,500 To 5,000, Deduct	*-19.34*	
		For >5,000 To 10,000, Deduct	*-25.30*	
		For >10,000, Deduct	*-31.25*	

02 41 13 13-0011 By Hand, Break-up And Leave In Place Bituminous And Concrete Paving *(02 41 13 13)*

Note: Includes slabs, pavements, sidewalks and base courses. Includes work around obstacles with jackhammer and hand tools. For individual work areas where conventional equipment access is limited or prohibited. Task is only to be used when requested by owner. These tasks are not to be used in conjunction with any other loading activities or other break-up tasks. Excludes saw cutting (where required) and disposal. See CSI section 02 41 13 13-0038 for breaking-up, removal and loading as a combined operation, 02 41 19 13-0001 for saw cutting.

02 41 13 13-0012	SF	Up To 3" By Hand, Break-up And Leave In Place Bituminous Paving	1.99	
02 41 13 13-0013	SF	>3" To 6" By Hand, Break-up And Leave In Place Bituminous Paving	2.52	
02 41 13 13-0014	SF	>6" To 9" By Hand, Break-up And Leave In Place Bituminous Paving	3.34	
02 41 13 13-0015	SF	Up To 3" By Hand, Break-up And Leave In Place Concrete Paving	2.49	
02 41 13 13-0016	SF	>3" To 6" By Hand, Break-up And Leave In Place Concrete Paving	3.16	
02 41 13 13-0017	SF	>6" To 9" By Hand, Break-up And Leave In Place Concrete Paving	4.17	

02 41 13 13-0018 By Machine, Break-up And Remove Bituminous And Concrete Paving *(02 41 13 13)*

Note: Includes slabs, pavements, sidewalks and base courses. Includes work around obstacles, breaking into manageable sizes by machine and loading into truck, dumpster or moving material to stockpile. Removal depth to include base aggregate. Excludes saw cutting (where required) and disposal. See CSI section 02 41 19 13-0001 for saw cutting.

02 41 13 13-0019	SY	Up To 3" By Machine, Break-up And Remove Bituminous Paving	17.30	
		For Elevated Slab, Add	*8.65*	
		For >500 To 1,000, Deduct	*-1.73*	
		For >1,000 To 2,500, Deduct	*-3.11*	
		For >2,500 To 5,000, Deduct	*-4.50*	
		For >5,000 To 10,000, Deduct	*-5.88*	
		For >10,000, Deduct	*-7.27*	
02 41 13 13-0020	SY	>3" To 6" By Machine, Break-up And Remove Bituminous Paving	23.63	
		For Elevated Slab, Add	*11.82*	
		For >500 To 1,000, Deduct	*-2.36*	
		For >1,000 To 2,500, Deduct	*-4.25*	
		For >2,500 To 5,000, Deduct	*-6.14*	
		For >5,000 To 10,000, Deduct	*-8.03*	
		For >10,000, Deduct	*-9.92*	
02 41 13 13-0021	SY	>6" To 9" By Machine, Break-up And Remove Bituminous Paving	32.78	
		For Elevated Slab, Add	*16.39*	
		For >500 To 1,000, Deduct	*-3.28*	
		For >1,000 To 2,500, Deduct	*-5.90*	
		For >2,500 To 5,000, Deduct	*-8.52*	
		For >5,000 To 10,000, Deduct	*-11.15*	
		For >10,000, Deduct	*-13.77*	
02 41 13 13-0022	SY	>9" To 12" By Machine, Break-up And Remove Bituminous Paving	42.77	
		For Elevated Slab, Add	*21.39*	
		For >500 To 1,000, Deduct	*-4.28*	
		For >1,000 To 2,500, Deduct	*-7.70*	
		For >2,500 To 5,000, Deduct	*-11.12*	
		For >5,000 To 10,000, Deduct	*-14.54*	
		For >10,000, Deduct	*-17.96*	
02 41 13 13-0023	SY	>12" To 15" By Machine, Break-up And Remove Bituminous Paving	59.53	
		For Elevated Slab, Add	*29.77*	
		For >500 To 1,000, Deduct	*-5.95*	
		For >1,000 To 2,500, Deduct	*-10.72*	
		For >2,500 To 5,000, Deduct	*-15.48*	
		For >5,000 To 10,000, Deduct	*-20.24*	
		For >10,000, Deduct	*-25.00*	
02 41 13 13-0024	SY	>15" To 18" By Machine, Break-up And Remove Bituminous Paving	81.85	
		For Elevated Slab, Add	*40.93*	
		For >500 To 1,000, Deduct	*-8.19*	
		For >1,000 To 2,500, Deduct	*-14.73*	
		For >2,500 To 5,000, Deduct	*-21.28*	
		For >5,000 To 10,000, Deduct	*-27.83*	
		For >10,000, Deduct	*-34.38*	
02 41 13 13-0025	SY	Up To 3" By Machine, Break-up And Remove Non-Reinforced Concrete Paving	19.90	
		For Elevated Slab, Add	*9.95*	
		For >500 To 1,000, Deduct	*-1.99*	
		For >1,000 To 2,500, Deduct	*-3.58*	
		For >2,500 To 5,000, Deduct	*-5.17*	
		For >5,000 To 10,000, Deduct	*-6.77*	
		For >10,000, Deduct	*-8.36*	
02 41 13 13-0026	SY	>3" To 6" By Machine, Break-up And Remove Non-Reinforced Concrete Paving	26.04	
		For Elevated Slab, Add	*13.02*	
		For >500 To 1,000, Deduct	*-2.60*	
		For >1,000 To 2,500, Deduct	*-4.69*	
		For >2,500 To 5,000, Deduct	*-6.77*	
		For >5,000 To 10,000, Deduct	*-8.85*	
		For >10,000, Deduct	*-10.94*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 41 13 13-0027	SY	>6" To 9" By Machine, Break-up And Remove Non-Reinforced Concrete Paving	46.50	
		For Elevated Slab, Add	*23.25*	
		For >500 To 1,000, Deduct	*-4.65*	
		For >1,000 To 2,500, Deduct	*-8.37*	
		For >2,500 To 5,000, Deduct	*-12.09*	
		For >5,000 To 10,000, Deduct	*-15.81*	
		For >10,000, Deduct	*-19.53*	
		For Additional Cost Of Hand Held Equipment Usage (Around Existing Structures And Obstructions), Add Note: (Around Existing Structures And Obstructions), Add	*13.95*	
02 41 13 13-0028	SY	>9" To 14" By Machine, Break-up And Remove Non-Reinforced Concrete Paving	60.75	
		For Elevated Slab, Add	*30.38*	
		For >500 To 1,000, Deduct	*-6.08*	
		For >1,000 To 2,500, Deduct	*-10.94*	
		For >2,500 To 5,000, Deduct	*-15.80*	
		For >5,000 To 10,000, Deduct	*-20.66*	
		For >10,000, Deduct	*-25.52*	
		For Additional Cost Of Hand Held Equipment Usage (Around Existing Structures And Obstructions), Add Note: (Around Existing Structures And Obstructions), Add	*18.23*	
02 41 13 13-0029	SY	Up To 3" By Machine, Break-up And Remove Welded Wire Reinforced Concrete Paving	26.42	
		For Elevated Slab, Add	*13.21*	
		For >500 To 1,000, Deduct	*-2.64*	
		For >1,000 To 2,500, Deduct	*-4.76*	
		For >2,500 To 5,000, Deduct	*-6.87*	
		For >5,000 To 10,000, Deduct	*-8.98*	
		For >10,000, Deduct	*-11.10*	
02 41 13 13-0030	SY	>3" To 6" By Machine, Break-up And Remove Welded Wire Reinforced Concrete Paving	34.23	
		For Elevated Slab, Add	*17.12*	
		For >500 To 1,000, Deduct	*-3.42*	
		For >1,000 To 2,500, Deduct	*-6.16*	
		For >2,500 To 5,000, Deduct	*-8.90*	
		For >5,000 To 10,000, Deduct	*-11.64*	
		For >10,000, Deduct	*-14.38*	
02 41 13 13-0031	SY	>6" To 9" By Machine, Break-up And Remove Welded Wire Reinforced Concrete Paving	56.74	
		For Elevated Slab, Add	*28.37*	
		For >500 To 1,000, Deduct	*-5.67*	
		For >1,000 To 2,500, Deduct	*-10.21*	
		For >2,500 To 5,000, Deduct	*-14.75*	
		For >5,000 To 10,000, Deduct	*-19.29*	
		For >10,000, Deduct	*-23.83*	
02 41 13 13-0032	SY	Up To 3" By Machine, Break-up And Remove Rod Reinforced Concrete Paving	28.64	
		For Elevated Slab, Add	*14.32*	
		For >500 To 1,000, Deduct	*-2.86*	
		For >1,000 To 2,500, Deduct	*-5.16*	
		For >2,500 To 5,000, Deduct	*-7.45*	
		For >5,000 To 10,000, Deduct	*-9.74*	
		For >10,000, Deduct	*-12.03*	
02 41 13 13-0033	SY	>3" To 6" By Machine, Break-up And Remove Rod Reinforced Concrete Paving	36.83	
		For Elevated Slab, Add	*18.42*	
		For >500 To 1,000, Deduct	*-3.68*	
		For >1,000 To 2,500, Deduct	*-6.63*	
		For >2,500 To 5,000, Deduct	*-9.58*	
		For >5,000 To 10,000, Deduct	*-12.52*	
		For >10,000, Deduct	*-15.47*	
02 41 13 13-0034	SY	>6" To 9" By Machine, Break-up And Remove Rod Reinforced Concrete Paving	65.85	
		For Elevated Slab, Add	*32.93*	
		For >500 To 1,000, Deduct	*-6.59*	
		For >1,000 To 2,500, Deduct	*-11.85*	
		For >2,500 To 5,000, Deduct	*-17.12*	
		For >5,000 To 10,000, Deduct	*-22.39*	
		For >10,000, Deduct	*-27.66*	
02 41 13 13-0035	SY	>9" To 14" By Machine, Break-up And Remove Rod Reinforced Concrete Paving	85.94	
		For Elevated Slab, Add	*42.97*	
		For >500 To 1,000, Deduct	*-8.59*	
		For >1,000 To 2,500, Deduct	*-15.47*	
		For >2,500 To 5,000, Deduct	*-22.34*	
		For >5,000 To 10,000, Deduct	*-29.22*	
		For >10,000, Deduct	*-36.09*	
02 41 13 13-0036	SY	>14" To 19" By Machine, Break-up And Remove Rod Reinforced Concrete Paving	112.36	
		For Elevated Slab, Add	*56.18*	
		For >500 To 1,000, Deduct	*-11.24*	
		For >1,000 To 2,500, Deduct	*-20.22*	
		For >2,500 To 5,000, Deduct	*-29.21*	
		For >5,000 To 10,000, Deduct	*-38.20*	
		For >10,000, Deduct	*-47.19*	
02 41 13 13-0037	SY	>19" To 24" By Machine, Break-up And Remove Rod Reinforced Concrete Paving	136.35	
		For Elevated Slab, Add	*68.18*	
		For >500 To 1,000, Deduct	*-13.64*	
		For >1,000 To 2,500, Deduct	*-24.54*	
		For >2,500 To 5,000, Deduct	*-35.45*	
		For >5,000 To 10,000, Deduct	*-46.36*	
		For >10,000, Deduct	*-57.27*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 41 13 13-0038		By Hand, Break-up And Remove Bituminous And Concrete Paving *(02 41 13 13)*		
		Note: Includes slabs, pavements, sidewalks and base courses. Includes work around obstacles. Work includes breaking into manageable size with jackhammer and hand tools, removal and loading onto a truck or dumpster. For individual work areas where conventional equipment access is limited or prohibited. Task is only to be used when requested by owner. Removal depth to include base aggregate. Excludes saw cutting (where required) and disposal. See CSI section 02 41 19 13-0001 for saw cutting.		
02 41 13 13-0039	SF	Up To 3" By Hand, Break-up And Remove Bituminous Paving	4.44	
02 41 13 13-0040	SF	>3" To 6" By Hand, Break-up And Remove Bituminous Paving	5.84	
02 41 13 13-0041	SF	>6" To 9" By Hand, Break-up And Remove Bituminous Paving	7.59	
02 41 13 13-0042	SF	Up To 3" By Hand, Break-up And Remove Concrete Paving	5.55	
02 41 13 13-0043	SF	>3" To 6" By Hand, Break-up And Remove Concrete Paving	7.66	
02 41 13 13-0044	SF	>6" To 9" By Hand, Break-up And Remove Concrete Paving	9.81	
02 41 13 13-0045	SF	Up To 3" By Hand, Break-up And Remove Welded Wire Reinforced Concrete Paving	7.77	
02 41 13 13-0046	SF	>3" To 6" By Hand, Break-up And Remove Welded Wire Reinforced Concrete Paving	10.72	
02 41 13 13-0047	SF	>6" To 9" By Hand, Break-up And Remove Welded Wire Reinforced Concrete Paving	13.74	
02 41 13 13-0048		Grind Concrete *(02 41 13 13)*		
02 41 13 13-0049	EA	Grind Existing Sidewalks, Up To 1/2" Depth, To Remove Ridges (Tripping Hazard)	279.10	
		Note: For each location up to 5' wide, feather up to 12" each direction.		
		For >1/2" To 1" Depth Of Grinding, Add	*41.87*	
		For >1" To 1-1/2" Depth Of Grinding, Add	*69.78*	
		For Up To 5, Add	*55.82*	
		For >5 To 10, Add	*27.91*	
		For >25 To 50, Deduct	*-27.91*	
		For >50 To 250, Deduct	*-41.87*	
		For >250, Deduct	*-55.82*	
		For Sidewalks >5', Add	*27.91*	
		For Up To 12" Additional Feathering Per Side, Add	*27.91*	
02 41 13 15		**Hydro Demolition** *(02 41 13)*		
02 41 13 15-0001		Hydro Demolition Of Concrete Pavement *(02 41 13 15)*		
		Note: Includes removal but excludes disposal of concrete.		
02 41 13 15-0002	SF	Up To 2" Depth, Hydro Demolition, Using 40,000 PSI Water Jet	8.48	
02 41 13 15-0003	SF	>2" To 4" Depth, Hydro Demolition, Using 40,000 PSI Water Jet	10.60	
02 41 13 15-0004	SF	>4" To 6" Depth, Hydro Demolition, Using 40,000 PSI Water Jet	14.17	
02 41 13 15-0005	SF	>6" To 8" Depth, Hydro Demolition, Using 40,000 PSI Water Jet	28.21	
02 41 19		**Selective Demolition** *(02 41)*		
02 41 19 13		**Selective Building Demolition** *(02 41 19)*		
02 41 19 13-0001		Saw Cutting *(02 41 19 13)*		
		Note: Includes blade wear, water, taping off area, layout, cleanup and mist spray with wet vacuuming for dust control where necessary. For projects where the total saw cutting charge is less than the minimum charge, use task "Saw Cut Minimum Charge" exclusively. Task "Saw Cut Minimum Charge" should not be used in conjunction with any other tasks in this section.		
02 41 19 13-0002	EA	Minimum Charge For Saw Cut	1,203.90	
		Note: For projects where the total saw cutting charge is less than the minimum charge, use this task exclusively. This task should not be used in conjunction with any other tasks in this section.		
02 41 19 13-0003	LF	Bituminous Paving Up To 4" Depth, Saw Cut	2.68	
		For Each Additional Pass (Depth To 3"), Add	*1.03*	
		For >250, Deduct	*-0.25*	
02 41 19 13-0004	LF	Brick Masonry Up To 4" Depth, Saw Cut	9.87	
		For Each Additional Pass (Depth To 3"), Add	*3.89*	
		For >250, Deduct	*-0.97*	
02 41 19 13-0005	LF	Concrete Block Up To 4" Depth, Saw Cut	8.93	
		For Each Additional Pass (Depth To 3"), Add	*3.51*	
		For >250, Deduct	*-0.87*	
02 41 19 13-0006	LF	Non-Reinforced Concrete Slab Or Paving Up To 4" Depth, Saw Cut	3.10	
		For Each Additional Pass (Depth To 3"), Add	*1.18*	
		For >250, Deduct	*-0.29*	
02 41 19 13-0007	LF	Welded Wire Reinforced Concrete Slab Up To 4" Depth, Saw Cut	4.07	
		For Each Additional Pass (Depth To 3"), Add	*1.55*	
		For >250, Deduct	*-0.38*	
02 41 19 13-0008	LF	Rod Reinforced Concrete Slab Up To 4" Depth, Saw Cut	6.65	
		For Each Additional Pass (Depth To 3"), Add	*2.58*	
		For >250, Deduct	*-0.64*	
02 41 19 13-0009	LF	Plain Concrete Walls Up To 4" Depth, Saw Cut	12.61	
		For Each Additional Pass (Depth To 3"), Add	*4.98*	
		For >250, Deduct	*-1.24*	
02 41 19 13-0010	LF	Saw Cut Rod Reinforced Concrete Walls Up To 4" Depth	16.93	
		For Each Additional Pass (Depth To 3"), Add	*6.69*	
		For >250, Deduct	*-1.67*	
02 41 19 13-0011	LF	Concrete And Asphalt Up To 4" Depth, Saw Cut In Streets	3.38	
		For Each Additional Pass (Depth To 3"), Add	*1.22*	
		For >250, Deduct	*-0.30*	
02 41 19 13-0012	LF	Igneous Stone Pavements Up To 4" Depth, Saw Cut	8.97	
		For Each Additional Pass (Depth To 3"), Add	*3.52*	
		For >250, Deduct	*-0.88*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 41 19 13-0013	LF	Sedimentary Stone Pavements Up To 4" Depth, Saw Cut	8.97	
		For Each Additional Pass (Depth To 3"), Add	*3.52*	
		For >250, Deduct	*-0.88*	
02 41 19 13-0014	LF	Metamorphic Stone Pavements Up To 4" Depth, Saw Cut	8.97	
		For Each Additional Pass (Depth To 3"), Add	*3.52*	
		For >250, Deduct	*-0.88*	
02 41 19 13-0015	LF	Terrazzo Stone Pavements Up To 4" Depth, Saw Cut	8.97	
		For Each Additional Pass (Depth To 3"), Add	*3.52*	
		For >250, Deduct	*-0.88*	

02 41 19 13-0016 Torch Cutting *(02 41 19 13)*

Note: Includes grinding edge

02 41 19 13-0017	LF	Up To 1/2", Torch Cut Steel Plate	3.32	
02 41 19 13-0018	LF	>1/2" To 1" Thick, Torch Cut Steel Plate	6.65	
02 41 19 13-0019	LF	>1" To 1-1/2" Thick, Torch Cut Steel Plate	9.96	
02 41 19 13-0020	LF	>1-1/2" To 2" Thick, Torch Cut Steel Plate	13.29	
02 41 19 13-0021	LF	>2" To 2-1/2" Thick, Torch Cut Steel Plate	16.61	
02 41 19 13-0022	LF	>2-1/2" To 3" Thick, Torch Cut Steel Plate	19.93	
02 41 19 13-0023	EA	Minimum Charge For Torch Cutting	1,085.20	
		Note: For projects where the total torch cutting charge is less than the minimum charge, use this task exclusively. This task should not be used in conjunction with any other tasks in this section.		

02 41 19 13-0024 Drilling In Existing Materials *(02 41 19 13)*

Note: Includes drill bit wear, water, layout, set-up and cleanup.

02 41 19 13-0025 Concrete Core Drilling *(02 41 19 13-0024)*

02 41 19 13-0026 Up To 4" Thick Concrete Core Drilling *(02 41 19 13-0025)*

02 41 19 13-0027	EA	Drill 1" Diameter Core In Up To 4" Concrete	47.69	
		For Horizontal Cores, Add	*9.43*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*18.87*	
02 41 19 13-0028	EA	Drill 1-1/2" Diameter Core In Up To 4" Concrete	52.92	
		For Horizontal Cores, Add	*10.48*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*20.96*	
02 41 19 13-0029	EA	Drill 2" Diameter Core In Up To 4" Concrete	58.75	
		For Horizontal Cores, Add	*11.65*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*23.29*	
02 41 19 13-0030	EA	Drill 3" Diameter Core In Up To 4" Concrete	83.88	
		For Horizontal Cores, Add	*16.64*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*33.27*	
02 41 19 13-0031	EA	Drill 4" Diameter Core In Up To 4" Concrete	112.40	
		For Horizontal Cores, Add	*22.29*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*44.58*	
02 41 19 13-0032	EA	Drill 6" Diameter Core In Up To 4" Concrete	125.96	
		For Horizontal Cores, Add	*24.96*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*49.91*	
02 41 19 13-0033	EA	Drill 8" Diameter Core In Up To 4" Concrete	201.27	
		For Horizontal Cores, Add	*39.93*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*79.86*	
02 41 19 13-0034	EA	Drill 10" Diameter Core In Up To 4" Concrete	251.75	
		For Horizontal Cores, Add	*49.91*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*99.82*	
02 41 19 13-0035	EA	Drill 12" Diameter Core In Up To 4" Concrete	293.80	
		For Horizontal Cores, Add	*58.23*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*116.46*	
02 41 19 13-0036	EA	Drill 14" Diameter Core In Up To 4" Concrete	335.86	
		For Horizontal Cores, Add	*66.54*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*133.08*	
02 41 19 13-0037	EA	Drill 18" Diameter Core In Up To 4" Concrete	378.33	
		For Horizontal Cores, Add	*74.85*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*149.71*	

02 41 19 13-0038 >4" To 6" Thick Concrete Core Drilling *(02 41 19 13-0025)*

02 41 19 13-0039	EA	Drill 1" Diameter Core In >4" To 6" Concrete	68.16	
		For Horizontal Cores, Add	*13.47*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*26.94*	
02 41 19 13-0040	EA	Drill 1-1/2" Diameter Core In >4" To 6" Concrete	75.65	
		For Horizontal Cores, Add	*14.97*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*29.94*	
02 41 19 13-0041	EA	Drill 2" Diameter Core In >4" To 6" Concrete	83.96	
		For Horizontal Cores, Add	*16.63*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*33.26*	
02 41 19 13-0042	EA	Drill 3" Diameter Core In >4" To 6" Concrete	100.91	
		For Horizontal Cores, Add	*19.96*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*39.93*	
02 41 19 13-0043	EA	Drill 4" Diameter Core In >4" To 6" Concrete	126.22	
		For Horizontal Cores, Add	*24.96*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*49.91*	
02 41 19 13-0044	EA	Drill 6" Diameter Core In >4" To 6" Concrete	168.16	
		For Horizontal Cores, Add	*33.27*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*66.54*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 41 19 13-0045	EA	Drill 8" Diameter Core In >4" To 6" Concrete	252.00	
		For Horizontal Cores, Add	*49.91*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*99.82*	
02 41 19 13-0046	EA	Drill 10" Diameter Core In >4" To 6" Concrete	294.46	
		For Horizontal Cores, Add	*58.23*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*116.46*	
02 41 19 13-0047	EA	Drill 12" Diameter Core In >4" To 6" Concrete	336.67	
		For Horizontal Cores, Add	*66.54*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*133.08*	
02 41 19 13-0048	EA	Drill 14" Diameter Core In >4" To 6" Concrete	379.09	
		For Horizontal Cores, Add	*74.85*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*149.71*	
02 41 19 13-0049	EA	Drill 18" Diameter Core In >4" To 6" Concrete	422.14	
		For Horizontal Cores, Add	*83.18*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*166.36*	

02 41 19 13-0050 >6" To 8" Thick Concrete Core Drilling *(02 41 19 13-0025)*

02 41 19 13-0051	EA	Drill 1" Diameter Core In >6" To 8" Concrete	75.19	
		For Horizontal Cores, Add	*14.82*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*29.64*	
02 41 19 13-0052	EA	Drill 1-1/2" Diameter Core In >6" To 8" Concrete	83.43	
		For Horizontal Cores, Add	*16.47*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*32.94*	
02 41 19 13-0053	EA	Drill 2" Diameter Core In >6" To 8" Concrete	92.58	
		For Horizontal Cores, Add	*18.30*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*36.60*	
02 41 19 13-0054	EA	Drill 3" Diameter Core In >6" To 8" Concrete	109.63	
		For Horizontal Cores, Add	*21.63*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*43.26*	
02 41 19 13-0055	EA	Drill 4" Diameter Core In >6" To 8" Concrete	143.35	
		For Horizontal Cores, Add	*28.28*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*56.56*	
02 41 19 13-0056	EA	Drill 6" Diameter Core In >6" To 8" Concrete	202.06	
		For Horizontal Cores, Add	*39.93*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*79.86*	
02 41 19 13-0057	EA	Drill 8" Diameter Core In >6" To 8" Concrete	335.99	
		For Horizontal Cores, Add	*66.54*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*133.08*	
02 41 19 13-0058	EA	Drill 10" Diameter Core In >6" To 8" Concrete	378.68	
		For Horizontal Cores, Add	*74.85*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*149.71*	
02 41 19 13-0059	EA	Drill 12" Diameter Core In >6" To 8" Concrete	421.17	
		For Horizontal Cores, Add	*83.18*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*166.36*	
02 41 19 13-0060	EA	Drill 14" Diameter Core In >6" To 8" Concrete	463.90	
		For Horizontal Cores, Add	*91.48*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*182.96*	
02 41 19 13-0061	EA	Drill 18" Diameter Core In >6" To 8" Concrete	507.53	
		For Horizontal Cores, Add	*99.82*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*199.64*	

02 41 19 13-0062 >8" To 10" Thick Concrete Core Drilling *(02 41 19 13-0025)*

02 41 19 13-0063	EA	Drill 1" Diameter Core In >8" To 10" Concrete	88.96	
		For Horizontal Cores, Add	*17.52*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*35.04*	
02 41 19 13-0064	EA	Drill 1-1/2" Diameter Core In >8" To 10" Concrete	98.69	
		For Horizontal Cores, Add	*19.46*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*38.93*	
02 41 19 13-0065	EA	Drill 2" Diameter Core In >8" To 10" Concrete	109.50	
		For Horizontal Cores, Add	*21.63*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*43.25*	
02 41 19 13-0066	EA	Drill 3" Diameter Core In >8" To 10" Concrete	126.66	
		For Horizontal Cores, Add	*24.96*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*49.91*	
02 41 19 13-0067	EA	Drill 4" Diameter Core In >8" To 10" Concrete	143.85	
		For Horizontal Cores, Add	*28.28*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*56.56*	
02 41 19 13-0068	EA	Drill 6" Diameter Core In >8" To 10" Concrete	202.67	
		For Horizontal Cores, Add	*39.93*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*79.86*	
02 41 19 13-0069	EA	Drill 8" Diameter Core In >8" To 10" Concrete	336.82	
		For Horizontal Cores, Add	*66.54*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*133.08*	
02 41 19 13-0070	EA	Drill 10" Diameter Core In >8" To 10" Concrete	379.77	
		For Horizontal Cores, Add	*74.85*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*149.71*	
02 41 19 13-0071	EA	Drill 12" Diameter Core In >8" To 10" Concrete	422.41	
		For Horizontal Cores, Add	*83.16*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*166.32*	
02 41 19 13-0072	EA	Drill 14" Diameter Core In >8" To 10" Concrete	465.56	
		For Horizontal Cores, Add	*91.48*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*182.96*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 41 19 13-0073	EA	Drill 18" Diameter Core In >8" To 10" Concrete	509.61	
		For Horizontal Cores, Add	*99.80*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*199.59*	

02 41 19 13-0074 >10" To 12" Thick Concrete Core Drilling *(02 41 19 13-0025)*

02 41 19 13-0075	EA	Drill 1" Diameter Core In >10" To 12" Concrete	95.98	
		For Horizontal Cores, Add	*18.87*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*37.73*	
02 41 19 13-0076	EA	Drill 1-1/2" Diameter Core In >10" To 12" Concrete	106.47	
		For Horizontal Cores, Add	*20.96*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*41.93*	
02 41 19 13-0077	EA	Drill 2" Diameter Core In >10" To 12" Concrete	118.10	
		For Horizontal Cores, Add	*23.29*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*46.58*	
02 41 19 13-0078	EA	Drill 3" Diameter Core In >10" To 12" Concrete	127.06	
		For Horizontal Cores, Add	*24.96*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*49.91*	
02 41 19 13-0079	EA	Drill 4" Diameter Core In >10" To 12" Concrete	169.32	
		For Horizontal Cores, Add	*33.27*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*66.54*	
02 41 19 13-0080	EA	Drill 6" Diameter Core In >10" To 12" Concrete	219.93	
		For Horizontal Cores, Add	*43.26*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*86.52*	
02 41 19 13-0081	EA	Drill 8" Diameter Core In >10" To 12" Concrete	354.30	
		For Horizontal Cores, Add	*69.87*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*139.74*	
02 41 19 13-0082	EA	Drill 10" Diameter Core In >10" To 12" Concrete	380.87	
		For Horizontal Cores, Add	*74.85*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*149.71*	
02 41 19 13-0083	EA	Drill 12" Diameter Core In >10" To 12" Concrete	440.48	
		For Horizontal Cores, Add	*86.51*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*173.03*	

02 41 19 13-0084 >12" Thick Concrete Core Drilling *(02 41 19 13-0025)*

02 41 19 13-0085	IN	Drill 1" Diameter Core In >12" Concrete	11.67	
		For Horizontal Cores, Add	*2.31*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*4.61*	
02 41 19 13-0086	IN	Drill 1-1/2" Diameter Core In >12" Concrete	12.96	
		For Horizontal Cores, Add	*2.56*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*5.13*	
02 41 19 13-0087	IN	Drill 2" Diameter Core In >12" Concrete	14.38	
		For Horizontal Cores, Add	*2.85*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*5.70*	
02 41 19 13-0088	IN	Drill 3" Diameter Core In >12" Concrete	15.78	
		For Horizontal Cores, Add	*3.12*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*6.24*	
02 41 19 13-0089	IN	Drill 4" Diameter Core In >12" Concrete	21.03	
		For Horizontal Cores, Add	*4.16*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*8.31*	
02 41 19 13-0090	IN	Drill 6" Diameter Core In >12" Concrete	27.36	
		For Horizontal Cores, Add	*5.41*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*10.82*	
02 41 19 13-0091	IN	Drill 8" Diameter Core In >12" Concrete	44.11	
		For Horizontal Cores, Add	*8.74*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*17.48*	
02 41 19 13-0092	IN	Drill 10" Diameter Core In >12" Concrete	47.53	
		For Horizontal Cores, Add	*9.40*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*18.79*	
02 41 19 13-0093	IN	Drill 12" Diameter Core In >12" Concrete	54.76	
		For Horizontal Cores, Add	*10.82*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*21.64*	

02 41 19 13-0094 Brick/Concrete Block Core Drilling *(02 41 19 13-0024)*

02 41 19 13-0095 Up To 4" Thick Brick/Concrete Block Core Drilling *(02 41 19 13-0094)*

02 41 19 13-0096	EA	Drill 1" Diameter Core In Up To 4" Brick/Concrete Block	38.26	
		For Horizontal Cores, Add	*7.55*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*15.10*	
02 41 19 13-0097	EA	Drill 1-1/2" Diameter Core In Up To 4" Brick/Concrete Block	42.43	
		For Horizontal Cores, Add	*8.38*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*16.76*	
02 41 19 13-0098	EA	Drill 2" Diameter Core In Up To 4" Brick/Concrete Block	47.10	
		For Horizontal Cores, Add	*9.32*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*18.63*	
02 41 19 13-0099	EA	Drill 3" Diameter Core In Up To 4" Brick/Concrete Block	67.25	
		For Horizontal Cores, Add	*13.31*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*26.62*	
02 41 19 13-0100	EA	Drill 4" Diameter Core In Up To 4" Brick/Concrete Block	90.10	
		For Horizontal Cores, Add	*17.83*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*35.66*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 41 19 13-0101	EA	Drill 6" Diameter Core In Up To 4" Brick/Concrete Block	101.00	
		For Horizontal Cores, Add	*19.96*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*39.93*	
02 41 19 13-0102	EA	Drill 8" Diameter Core In Up To 4" Brick/Concrete Block	161.34	
		For Horizontal Cores, Add	*31.94*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*63.89*	
02 41 19 13-0103	EA	Drill 10" Diameter Core In Up To 4" Brick/Concrete Block	201.85	
		For Horizontal Cores, Add	*39.93*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*79.86*	
02 41 19 13-0104	EA	Drill 12" Diameter Core In Up To 4" Brick/Concrete Block	235.57	
		For Horizontal Cores, Add	*46.58*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*93.17*	
02 41 19 13-0105	EA	Drill 14" Diameter Core In Up To 4" Brick/Concrete Block	269.32	
		For Horizontal Cores, Add	*53.23*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*106.46*	
02 41 19 13-0106	EA	Drill 18" Diameter Core In Up To 4" Brick/Concrete Block	303.48	
		For Horizontal Cores, Add	*59.88*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*119.77*	

02 41 19 13-0107 >4" To 6" Thick Brick/Concrete Block Core Drilling *(02 41 19 13-0094)*

02 41 19 13-0108	EA	Drill 1" Diameter Core In >4" To 6" Brick/Concrete Block	54.69	
		For Horizontal Cores, Add	*10.78*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*21.56*	
02 41 19 13-0109	EA	Drill 1-1/2" Diameter Core In >4" To 6" Brick/Concrete Block	60.67	
		For Horizontal Cores, Add	*11.97*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*23.95*	
02 41 19 13-0110	EA	Drill 2" Diameter Core In >4" To 6" Brick/Concrete Block	67.34	
		For Horizontal Cores, Add	*13.31*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*26.62*	
02 41 19 13-0111	EA	Drill 3" Diameter Core In >4" To 6" Brick/Concrete Block	80.95	
		For Horizontal Cores, Add	*15.97*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*31.94*	
02 41 19 13-0112	EA	Drill 4" Diameter Core In >4" To 6" Brick/Concrete Block	101.26	
		For Horizontal Cores, Add	*19.96*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*39.93*	
02 41 19 13-0113	EA	Drill 6" Diameter Core In >4" To 6" Brick/Concrete Block	134.89	
		For Horizontal Cores, Add	*26.62*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*53.24*	
02 41 19 13-0114	EA	Drill 8" Diameter Core In >4" To 6" Brick/Concrete Block	202.10	
		For Horizontal Cores, Add	*39.93*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*79.86*	
02 41 19 13-0115	EA	Drill 10" Diameter Core In >4" To 6" Brick/Concrete Block	236.23	
		For Horizontal Cores, Add	*46.58*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*93.17*	
02 41 19 13-0116	EA	Drill 12" Diameter Core In >4" To 6" Brick/Concrete Block	270.13	
		For Horizontal Cores, Add	*53.23*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*106.46*	
02 41 19 13-0117	EA	Drill 14" Diameter Core In >4" To 6" Brick/Concrete Block	304.24	
		For Horizontal Cores, Add	*59.88*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*119.77*	
02 41 19 13-0118	EA	Drill 18" Diameter Core In >4" To 6" Brick/Concrete Block	338.97	
		For Horizontal Cores, Add	*66.54*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*133.09*	

02 41 19 13-0119 >6" To 8" Thick Brick/Concrete Block Core Drilling *(02 41 19 13-0094)*

02 41 19 13-0120	EA	Drill 1" Diameter Core In >6" To 8" Brick/Concrete Block	60.37	
		For Horizontal Cores, Add	*11.86*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*23.72*	
02 41 19 13-0121	EA	Drill 1-1/2" Diameter Core In >6" To 8" Brick/Concrete Block	66.96	
		For Horizontal Cores, Add	*13.18*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*26.35*	
02 41 19 13-0122	EA	Drill 2" Diameter Core In >6" To 8" Brick/Concrete Block	74.28	
		For Horizontal Cores, Add	*14.64*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*29.28*	
02 41 19 13-0123	EA	Drill 3" Diameter Core In >6" To 8" Brick/Concrete Block	88.00	
		For Horizontal Cores, Add	*17.30*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*34.60*	
02 41 19 13-0124	EA	Drill 4" Diameter Core In >6" To 8" Brick/Concrete Block	115.08	
		For Horizontal Cores, Add	*22.63*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*45.25*	
02 41 19 13-0125	EA	Drill 6" Diameter Core In >6" To 8" Brick/Concrete Block	162.13	
		For Horizontal Cores, Add	*31.94*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*63.89*	
02 41 19 13-0126	EA	Drill 8" Diameter Core In >6" To 8" Brick/Concrete Block	269.45	
		For Horizontal Cores, Add	*53.23*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*106.46*	
02 41 19 13-0127	EA	Drill 10" Diameter Core In >6" To 8" Brick/Concrete Block	303.83	
		For Horizontal Cores, Add	*59.88*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*119.77*	
02 41 19 13-0128	EA	Drill 12" Diameter Core In >6" To 8" Brick/Concrete Block	338.00	
		For Horizontal Cores, Add	*66.54*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*133.09*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 41 19 13-0129	EA	Drill 14" Diameter Core In >6" To 8" Brick/Concrete Block	372.41	
		For Horizontal Cores, Add	*73.18*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*146.37*	
02 41 19 13-0130	EA	Drill 18" Diameter Core In >6" To 8" Brick/Concrete Block	407.72	
		For Horizontal Cores, Add	*79.86*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*159.71*	

02 41 19 13-0131 >8" To 10" Thick Brick/Concrete Block Core Drilling *(02 41 19 13-0094)*

02 41 19 13-0132	EA	Drill 1" Diameter Core In >8" To 10" Brick/Concrete Block	71.44	
		For Horizontal Cores, Add	*14.01*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*28.03*	
02 41 19 13-0133	EA	Drill 1-1/2" Diameter Core In >8" To 10" Brick/Concrete Block	79.23	
		For Horizontal Cores, Add	*15.57*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*31.14*	
02 41 19 13-0134	EA	Drill 2" Diameter Core In >8" To 10" Brick/Concrete Block	87.87	
		For Horizontal Cores, Add	*17.30*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*34.60*	
02 41 19 13-0135	EA	Drill 3" Diameter Core In >8" To 10" Brick/Concrete Block	101.70	
		For Horizontal Cores, Add	*19.96*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*39.93*	
02 41 19 13-0136	EA	Drill 4" Diameter Core In >8" To 10" Brick/Concrete Block	115.58	
		For Horizontal Cores, Add	*22.63*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*45.25*	
02 41 19 13-0137	EA	Drill 6" Diameter Core In >8" To 10" Brick/Concrete Block	162.74	
		For Horizontal Cores, Add	*31.94*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*63.89*	
02 41 19 13-0138	EA	Drill 8" Diameter Core In >8" To 10" Brick/Concrete Block	270.28	
		For Horizontal Cores, Add	*53.23*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*106.46*	
02 41 19 13-0139	EA	Drill 10" Diameter Core In >8" To 10" Brick/Concrete Block	304.92	
		For Horizontal Cores, Add	*59.88*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*119.77*	
02 41 19 13-0140	EA	Drill 12" Diameter Core In >8" To 10" Brick/Concrete Block	339.25	
		For Horizontal Cores, Add	*66.53*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*133.06*	
02 41 19 13-0141	EA	Drill 14" Diameter Core In >8" To 10" Brick/Concrete Block	374.07	
		For Horizontal Cores, Add	*73.18*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*146.37*	
02 41 19 13-0142	EA	Drill 18" Diameter Core In >8" To 10" Brick/Concrete Block	409.81	
		For Horizontal Cores, Add	*79.84*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*159.67*	

02 41 19 13-0143 >10" To 12" Thick Brick/Concrete Block Core Drilling *(02 41 19 13-0094)*

02 41 19 13-0144	EA	Drill 1" Diameter Core In >10" To 12" Brick/Concrete Block	77.11	
		For Horizontal Cores, Add	*15.09*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*30.18*	
02 41 19 13-0145	EA	Drill 1-1/2" Diameter Core In >10" To 12" Brick/Concrete Block	85.50	
		For Horizontal Cores, Add	*16.77*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*33.54*	
02 41 19 13-0146	EA	Drill 2" Diameter Core In >10" To 12" Brick/Concrete Block	94.82	
		For Horizontal Cores, Add	*18.63*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*37.27*	
02 41 19 13-0147	EA	Drill 3" Diameter Core In >10" To 12" Brick/Concrete Block	102.10	
		For Horizontal Cores, Add	*19.96*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*39.93*	
02 41 19 13-0148	EA	Drill 4" Diameter Core In >10" To 12" Brick/Concrete Block	136.05	
		For Horizontal Cores, Add	*26.62*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*53.24*	
02 41 19 13-0149	EA	Drill 6" Diameter Core In >10" To 12" Brick/Concrete Block	176.66	
		For Horizontal Cores, Add	*34.60*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*69.21*	
02 41 19 13-0150	EA	Drill 8" Diameter Core In >10" To 12" Brick/Concrete Block	284.44	
		For Horizontal Cores, Add	*55.90*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*111.80*	
02 41 19 13-0151	EA	Drill 10" Diameter Core In >10" To 12" Brick/Concrete Block	306.02	
		For Horizontal Cores, Add	*59.88*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*119.77*	
02 41 19 13-0152	EA	Drill 12" Diameter Core In >10" To 12" Brick/Concrete Block	353.97	
		For Horizontal Cores, Add	*69.21*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*138.42*	

02 41 19 13-0153 >12" Thick Brick/Concrete Block Core Drilling *(02 41 19 13-0094)*

02 41 19 13-0154	IN	Drill 1" Diameter Core In >12" Brick/Concrete Block	9.37	
		For Horizontal Cores, Add	*1.85*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*3.69*	
02 41 19 13-0155	IN	Drill 1-1/2" Diameter Core In >12" Brick/Concrete Block	10.39	
		For Horizontal Cores, Add	*2.05*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*4.10*	
02 41 19 13-0156	IN	Drill 2" Diameter Core In >12" Brick/Concrete Block	11.53	
		For Horizontal Cores, Add	*2.28*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*4.56*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 41 19 13-0157	IN	Drill 3" Diameter Core In >12" Brick/Concrete Block	12.66	
		For Horizontal Cores, Add	*2.49*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*4.99*	
02 41 19 13-0158	IN	Drill 4" Diameter Core In >12" Brick/Concrete Block	16.88	
		For Horizontal Cores, Add	*3.33*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*6.65*	
02 41 19 13-0159	IN	Drill 6" Diameter Core In >12" Brick/Concrete Block	21.94	
		For Horizontal Cores, Add	*4.33*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*8.66*	
02 41 19 13-0160	IN	Drill 8" Diameter Core In >12" Brick/Concrete Block	35.37	
		For Horizontal Cores, Add	*6.99*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*13.98*	
02 41 19 13-0161	IN	Drill 10" Diameter Core In >12" Brick/Concrete Block	38.14	
		For Horizontal Cores, Add	*7.52*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*15.04*	
02 41 19 13-0162	IN	Drill 12" Diameter Core In >12" Brick/Concrete Block	43.95	
		For Horizontal Cores, Add	*8.66*	
		For Overhead Ceiling Cores (Where Not Accessible From Above), Add	*17.32*	

02 41 19 13-0163 Asphalt Core Drilling *(02 41 19 13-0024)*

02 41 19 13-0164 Up To 2" Thick Asphalt Core Drilling *(02 41 19 13-0163)*

02 41 19 13-0165	EA	Drill 1" Diameter Core In Up To 2" Asphalt	22.88
02 41 19 13-0166	EA	Drill 1-1/2" Diameter Core In Up To 2" Asphalt	28.60
02 41 19 13-0167	EA	Drill 2" Diameter Core In Up To 2" Asphalt	35.75
02 41 19 13-0168	EA	Drill 3" Diameter Core In Up To 2" Asphalt	44.35
02 41 19 13-0169	EA	Drill 4" Diameter Core In Up To 2" Asphalt	55.81
02 41 19 13-0170	EA	Drill 6" Diameter Core In Up To 2" Asphalt	70.13
02 41 19 13-0171	EA	Drill 8" Diameter Core In Up To 2" Asphalt	87.33
02 41 19 13-0172	EA	Drill 10" Diameter Core In Up To 2" Asphalt	108.77
02 41 19 13-0173	EA	Drill 12" Diameter Core In Up To 2" Asphalt	135.93

02 41 19 13-0174 >2" To 3" Thick Asphalt Core Drilling *(02 41 19 13-0163)*

02 41 19 13-0175	EA	Drill 1" Diameter Core In >2" To 3" Asphalt	28.59
02 41 19 13-0176	EA	Drill 1-1/2" Diameter Core In >2" To 3" Asphalt	37.16
02 41 19 13-0177	EA	Drill 2" Diameter Core In >2" To 3" Asphalt	45.75
02 41 19 13-0178	EA	Drill 3" Diameter Core In >2" To 3" Asphalt	57.20
02 41 19 13-0179	EA	Drill 4" Diameter Core In >2" To 3" Asphalt	71.52
02 41 19 13-0180	EA	Drill 6" Diameter Core In >2" To 3" Asphalt	90.11
02 41 19 13-0181	EA	Drill 8" Diameter Core In >2" To 3" Asphalt	111.62
02 41 19 13-0182	EA	Drill 10" Diameter Core In >2" To 3" Asphalt	140.18
02 41 19 13-0183	EA	Drill 12" Diameter Core In >2" To 3" Asphalt	174.49

02 41 19 13-0184 >3" To 4" Thick Asphalt Core Drilling *(02 41 19 13-0163)*

02 41 19 13-0185	EA	Drill 1" Diameter Core In >3" To 4" Asphalt	37.17
02 41 19 13-0186	EA	Drill 1-1/2" Diameter Core In >3" To 4" Asphalt	47.20
02 41 19 13-0187	EA	Drill 2" Diameter Core In >3" To 4" Asphalt	58.63
02 41 19 13-0188	EA	Drill 3" Diameter Core In >3" To 4" Asphalt	72.96
02 41 19 13-0189	EA	Drill 4" Diameter Core In >3" To 4" Asphalt	91.59
02 41 19 13-0190	EA	Drill 6" Diameter Core In >3" To 4" Asphalt	114.49
02 41 19 13-0191	EA	Drill 8" Diameter Core In >3" To 4" Asphalt	143.18
02 41 19 13-0192	EA	Drill 10" Diameter Core In >3" To 4" Asphalt	178.91
02 41 19 13-0193	EA	Drill 12 Diameter Core In >3" To 4" Asphalt	223.22

02 41 19 13-0194 >4" To 6" Thick Asphalt Core Drilling *(02 41 19 13-0163)*

02 41 19 13-0195	EA	Drill 1" Diameter Core In >4" To 6" Asphalt	48.66
02 41 19 13-0196	EA	Drill 1-1/2" Diameter Core In >4" To 6" Asphalt	60.13
02 41 19 13-0197	EA	Drill 2" Diameter Core In >4" To 6" Asphalt	74.43
02 41 19 13-0198	EA	Drill 3" Diameter Core In >4" To 6" Asphalt	94.51
02 41 19 13-0199	EA	Drill 4" Diameter Core In >4" To 6" Asphalt	117.47
02 41 19 13-0200	EA	Drill 6" Diameter Core In >4" To 6" Asphalt	146.12
02 41 19 13-0201	EA	Drill 8" Diameter Core In >4" To 6" Asphalt	183.47
02 41 19 13-0202	EA	Drill 10" Diameter Core In >4" To 6" Asphalt	229.21
02 41 19 13-0203	EA	Drill 12" Diameter Core In >4" To 6" Asphalt	286.45

02 41 19 13-0204 Manhole Core Drilling *(02 41 19 13-0024)*

02 41 19 13-0205	EA	Drill 4" Diameter Core In 6" Brick Manhole	250.52
02 41 19 13-0206	EA	Drill 5" Diameter Core In 6" Brick Manhole	286.31
02 41 19 13-0207	EA	Drill 6" Diameter Core In 6" Brick Manhole	333.91
02 41 19 13-0208	EA	Drill 8" Diameter Core In 6" Brick Manhole	500.73
02 41 19 13-0209	EA	Drill 2" Diameter Core In 8" Concrete Manhole	335.66
02 41 19 13-0210	EA	Drill 3" Diameter Core In 8" Concrete Manhole	357.42
02 41 19 13-0211	EA	Drill 4" Diameter Core In 8" Concrete Manhole	393.48
02 41 19 13-0212	EA	Drill 5" Diameter Core In 8" Concrete Manhole	422.18
02 41 19 13-0213	EA	Drill 6" Diameter Core In 8" Concrete Manhole	500.72
02 41 19 13-0214	EA	Drill 8" Diameter Core In 8" Concrete Manhole	715.16

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 41 19 13-0215	EA	Drill 2" Diameter Core In Fiberglass Manhole	33.30	
02 41 19 13-0216	EA	Drill 3" Diameter Core In Fiberglass Manhole	38.43	
02 41 19 13-0217	EA	Drill 4" Diameter Core In Fiberglass Manhole	41.64	
02 41 19 13-0218	EA	Drill 5" Diameter Core In Fiberglass Manhole	45.43	
02 41 19 13-0219	EA	Drill 6" Diameter Core In Fiberglass Manhole	49.96	
02 41 19 13-0220	EA	Drill 8" Diameter Core In Fiberglass Manhole	55.53	
02 41 19 13-0221		**Drilling In Concrete Per Inch Of Depth** *(02 41 19 13-0024)*		
		Note: Includes layout.		
02 41 19 13-0222	IN	1/4" Diameter Drilling In Concrete Per Inch Of Depth	2.32	
02 41 19 13-0223	IN	5/16" Diameter Drilling In Concrete Per Inch Of Depth	2.45	
02 41 19 13-0224	IN	3/8" Diameter Drilling In Concrete Per Inch Of Depth	2.58	
02 41 19 13-0225	IN	1/2" Diameter Drilling In Concrete Per Inch Of Depth	2.78	
02 41 19 13-0226	IN	5/8" Diameter Drilling In Concrete Per Inch Of Depth	2.95	
02 41 19 13-0227	IN	3/4" Diameter Drilling In Concrete Per Inch Of Depth	3.24	
02 41 19 13-0228	IN	7/8" Diameter Drilling In Concrete Per Inch Of Depth	3.50	
02 41 19 13-0229	IN	1" Diameter Drilling In Concrete Per Inch Of Depth	3.68	
02 41 19 13-0230	IN	1-1/8" Diameter Drilling In Concrete Per Inch Of Depth	4.34	
02 41 19 13-0231	IN	1-1/4" Diameter Drilling In Concrete Per Inch Of Depth	4.08	
02 41 19 13-0232	IN	1-3/8" Diameter Drilling In Concrete Per Inch Of Depth	4.34	
02 41 19 13-0233	IN	1-1/2" Diameter Drilling In Concrete Per Inch Of Depth	4.61	
02 41 19 13-0234	IN	1-3/4" Diameter Drilling In Concrete Per Inch Of Depth	5.11	
02 41 19 13-0235	IN	2" Diameter Drilling In Concrete Per Inch Of Depth	5.95	
02 41 19 13-0236		**Drilling In Brick/Concrete Block Per Inch Of Depth** *(02 41 19 13-0024)*		
		Note: Includes layout.		
02 41 19 13-0237	IN	1/4" Diameter Drilling In Brick/Concrete Block Per Inch Of Depth	1.93	
02 41 19 13-0238	IN	5/16" Diameter Drilling In Brick/Concrete Block Per Inch Of Depth	2.04	
02 41 19 13-0239	IN	3/8" Diameter Drilling In Brick/Concrete Block Per Inch Of Depth	2.15	
02 41 19 13-0240	IN	1/2" Diameter Drilling In Brick/Concrete Block Per Inch Of Depth	2.32	
02 41 19 13-0241	IN	5/8" Diameter Drilling In Brick/Concrete Block Per Inch Of Depth	2.46	
02 41 19 13-0242	IN	3/4" Diameter Drilling In Brick/Concrete Block Per Inch Of Depth	2.70	
02 41 19 13-0243	IN	7/8" Diameter Drilling In Brick/Concrete Block Per Inch Of Depth	2.92	
02 41 19 13-0244	IN	1" Diameter Drilling In Brick/Concrete Block Per Inch Of Depth	3.07	
02 41 19 13-0245	IN	1-1/8" Diameter Drilling In Brick/Concrete Block Per Inch Of Depth	3.24	
02 41 19 13-0246	IN	1-1/4" Diameter Drilling In Brick/Concrete Block Per Inch Of Depth	3.40	
02 41 19 13-0247	IN	1-3/8" Diameter Drilling In Brick/Concrete Block Per Inch Of Depth	3.63	
02 41 19 13-0248	IN	1-1/2" Diameter Drilling In Brick/Concrete Block Per Inch Of Depth	3.84	
02 41 19 13-0249	IN	1-3/4" Diameter Drilling In Brick/Concrete Block Per Inch Of Depth	4.29	
02 41 19 13-0250	IN	2" Diameter Drilling In Brick/Concrete Block Per Inch Of Depth	4.97	
02 41 19 13-0251		**Drilling In Wood Or Plastic Per Inch Of Depth** *(02 41 19 13-0024)*		
		Note: Includes layout.		
02 41 19 13-0252	IN	1/4" Diameter Drilling In Wood Or Plastic Per Inch Of Depth	0.96	
02 41 19 13-0253	IN	5/16" Diameter Drilling In Wood Or Plastic Per Inch Of Depth	1.01	
02 41 19 13-0254	IN	3/8" Diameter Drilling In Wood Or Plastic Per Inch Of Depth	1.08	
02 41 19 13-0255	IN	1/2" Diameter Drilling In Wood Or Plastic Per Inch Of Depth	1.15	
02 41 19 13-0256	IN	5/8" Diameter Drilling In Wood Or Plastic Per Inch Of Depth	1.22	
02 41 19 13-0257	IN	3/4" Diameter Drilling In Wood Or Plastic Per Inch Of Depth	1.34	
02 41 19 13-0258	IN	7/8" Diameter Drilling In Wood Or Plastic Per Inch Of Depth	1.45	
02 41 19 13-0259	IN	1" Diameter Drilling In Wood Or Plastic Per Inch Of Depth	1.54	
02 41 19 13-0260	IN	1-1/8" Diameter Drilling In Wood Or Plastic Per Inch Of Depth	1.61	
02 41 19 13-0261	IN	1-1/4" Diameter Drilling In Wood Or Plastic Per Inch Of Depth	1.69	
02 41 19 13-0262	IN	1-3/8" Diameter Drilling In Wood Or Plastic Per Inch Of Depth	1.80	
02 41 19 13-0263	IN	1-1/2" Diameter Drilling In Wood Or Plastic Per Inch Of Depth	1.92	
02 41 19 13-0264	IN	1-3/4" Diameter Drilling In Wood Or Plastic Per Inch Of Depth	2.13	
02 41 19 13-0265	IN	2" Diameter Drilling In Wood Or Plastic Per Inch Of Depth	2.48	
02 41 19 13-0266		**Drilling In Drywall Or Plaster Per Inch Of Depth** *(02 41 19 13-0024)*		
		Note: Includes layout, high efficiency particulate air (HEPA) vacuum and protection.		
02 41 19 13-0267	IN	1/4" Diameter Drilling In Drywall Or Plaster Per Inch Of Depth	0.96	
02 41 19 13-0268	IN	5/16" Diameter Drilling In Drywall Or Plaster Per Inch Of Depth	1.01	
02 41 19 13-0269	IN	3/8" Diameter Drilling In Drywall Or Plaster Per Inch Of Depth	1.08	
02 41 19 13-0270	IN	1/2" Diameter Drilling In Drywall Or Plaster Per Inch Of Depth	1.15	
02 41 19 13-0271	IN	5/8" Diameter Drilling In Drywall Or Plaster Per Inch Of Depth	1.22	
02 41 19 13-0272	IN	3/4" Diameter Drilling In Drywall Or Plaster Per Inch Of Depth	1.34	
02 41 19 13-0273	IN	7/8" Diameter Drilling In Drywall Or Plaster Per Inch Of Depth	1.45	
02 41 19 13-0274	IN	1" Diameter Drilling In Drywall Or Plaster Per Inch Of Depth	1.54	
02 41 19 13-0275	IN	1-1/8" Diameter Drilling In Drywall Or Plaster Per Inch Of Depth	1.61	
02 41 19 13-0276	IN	1-1/4" Diameter Drilling In Drywall Or Plaster Per Inch Of Depth	1.69	
02 41 19 13-0277	IN	1-3/8" Diameter Drilling In Drywall Or Plaster Per Inch Of Depth	1.80	
02 41 19 13-0278	IN	1-1/2" Diameter Drilling In Drywall Or Plaster Per Inch Of Depth	1.92	
02 41 19 13-0279	IN	1-3/4" Diameter Drilling In Drywall Or Plaster Per Inch Of Depth	2.13	
02 41 19 13-0280	IN	2" Diameter Drilling In Drywall Or Plaster Per Inch Of Depth	2.48	
02 41 19 13-0281	IN	Drill 3" Diameter Core In Wood Or Plastic Per Inch Of Depth	3.25	
02 41 19 13-0282	IN	Drill 4" Diameter Core In Wood Or Plastic Per Inch Of Depth	4.10	
02 41 19 13-0283	IN	Drill 5" Diameter Core In Wood Or Plastic Per Inch Of Depth	4.63	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 41 19 13-0284	IN	Drill 6" Diameter Core In Wood Or Plastic Per Inch Of Depth	5.15	
02 41 19 13-0285		Limestone Core Drilling *(02 41 19 13-0024)*		
02 41 19 13-0286		10" To 14" Thick Limestone Core Drilling *(02 41 19 13-0285)*		
02 41 19 13-0287	EA	Drill 1" Diameter Core In 10" To 14" Limestone	71.87	
02 41 19 13-0288	EA	Drill 1-1/2" Diameter Core In 10" To 14" Limestone	86.31	
02 41 19 13-0289	EA	Drill 2" Diameter Core In 10" To 14" Limestone	93.62	
02 41 19 13-0290	EA	Drill 3" Diameter Core In 10" To 14" Limestone	108.28	
02 41 19 13-0291	EA	Drill 4" Diameter Core In 10" To 14" Limestone	122.96	
02 41 19 13-0292	EA	Drill 6" Diameter Core In 10" To 14" Limestone	173.27	
02 41 19 13-0293	EA	Drill 8" Diameter Core In 10" To 14" Limestone	288.05	
02 41 19 13-0294		15" To 18" Thick Limestone Core Drilling *(02 41 19 13-0285)*		
02 41 19 13-0295	EA	Drill 1" Diameter Core In 15" To 18" Limestone	79.13	
02 41 19 13-0296	EA	Drill 1-1/2" Diameter Core In 15" To 18" Limestone	93.60	
02 41 19 13-0297	EA	Drill 2" Diameter Core In 15" To 18" Limestone	100.98	
02 41 19 13-0298	EA	Drill 3" Diameter Core In 15" To 18" Limestone	108.60	
02 41 19 13-0299	EA	Drill 4" Diameter Core In 15" To 18" Limestone	144.74	
02 41 19 13-0300	EA	Drill 6" Diameter Core In 15" To 18" Limestone	187.98	
02 41 19 13-0301	EA	Drill 8" Diameter Core In 15" To 18" Limestone	303.06	
02 41 19 13-0302		19" To 24" Thick Limestone Core Drilling *(02 41 19 13-0285)*		
02 41 19 13-0303	EA	Drill 1" Diameter Core In 19" To 24" Limestone	86.36	
02 41 19 13-0304	EA	Drill 1-1/2" Diameter Core In 19" To 24" Limestone	100.89	
02 41 19 13-0305	EA	Drill 2" Diameter Core In 19" To 24" Limestone	108.30	
02 41 19 13-0306	EA	Drill 3" Diameter Core In 19" To 24" Limestone	123.09	
02 41 19 13-0307	EA	Drill 4" Diameter Core In 19" To 24" Limestone	173.57	
02 41 19 13-0308	EA	Drill 6" Diameter Core In 19" To 24" Limestone	216.91	
02 41 19 13-0309	EA	Drill 8" Diameter Core In 19" To 24" Limestone	325.22	
02 41 19 13-0310		Minimum Charge For Core Drilling *(02 41 19 13-0024)*		
02 41 19 13-0311	EA	Minimum Charge For Core Drill Note: For projects where the total core drilling charge is less than the minimum charge, use task "Minimum Charge For Core Drilling" exclusively. Task "Minimum Charge For Core Drilling" should not be used in conjunction with any other tasks in this section. Does not apply to sections "Drilling In Concrete Per Inch Of Depth" or "Drilling In Brick Or Block Per Inch Of Depth" or "Drilling In Wood Or Plastic Per Inch Of Depth".	969.40	
02 41 19 13-0312		Cutouts *(02 41 19 13)* Note: Includes saw cutting and removal of material. Not to be used for openings greater than 24 SF.		
02 41 19 13-0313		Reinforced Concrete Slab On Grade Cutouts *(02 41 19 13-0312)*		
02 41 19 13-0314	SF	4" Thick Reinforced Concrete Slab On Grade Cutouts, <24 SF	55.12	
02 41 19 13-0315	SF	6" Thick Reinforced Concrete Slab On Grade Cutouts, <24 SF	58.46	
02 41 19 13-0316	SF	8" Thick Reinforced Concrete Slab On Grade Cutouts, <24 SF	61.80	
02 41 19 13-0317	SF	10" Thick Reinforced Concrete Slab On Grade Cutouts, <24 SF	65.14	
02 41 19 13-0318	SF	12" Thick Reinforced Concrete Slab On Grade Cutouts, <24 SF	66.81	
02 41 19 13-0319		Reinforced Concrete Elevated Slab Cutouts *(02 41 19 13-0312)* Note: Includes cutting and removing steel decking.		
02 41 19 13-0320	SF	4" Thick Reinforced Concrete Elevated Slab Cutouts, <24 SF	67.18	
02 41 19 13-0321	SF	6" Thick Reinforced Concrete Elevated Slab Cutouts, <24 SF	71.25	
02 41 19 13-0322	SF	8" Thick Reinforced Concrete Elevated Slab Cutouts, <24 SF	75.32	
02 41 19 13-0323	SF	10" Thick Reinforced Concrete Elevated Slab Cutouts, <24 SF	79.40	
02 41 19 13-0324	SF	12" Thick Reinforced Concrete Elevated Slab Cutouts, <24 SF	81.43	
02 41 19 13-0325		Reinforced Concrete Wall Cutouts *(02 41 19 13-0312)*		
02 41 19 13-0326	SF	4" Thick Reinforced Concrete Wall Cutouts, <24 SF	68.90	
02 41 19 13-0327	SF	6" Thick Reinforced Concrete Wall Cutouts, <24 SF	73.07	
02 41 19 13-0328	SF	8" Thick Reinforced Concrete Wall Cutouts, <24 SF	77.26	
02 41 19 13-0329	SF	10" Thick Reinforced Concrete Wall Cutouts, <24 SF	81.43	
02 41 19 13-0330	SF	12" Thick Reinforced Concrete Wall Cutouts, <24 SF	83.51	
02 41 19 13-0331		Brick Wall Cutouts *(02 41 19 13-0312)* Note: Excludes toothing.		
02 41 19 13-0332	SF	4" Thick Brick Wall Cutouts, <24 SF	20.88	
02 41 19 13-0333	SF	6" Thick Brick Wall Cutouts, <24 SF	34.46	
02 41 19 13-0334	SF	8" Thick Brick Wall Cutouts, <24 SF	47.98	
02 41 19 13-0335	SF	10" Thick Brick Wall Cutouts, <24 SF	58.46	
02 41 19 13-0336	SF	12" Thick Brick Wall Cutouts, <24 SF	69.95	
02 41 19 13-0337	SF	16" Thick Brick Wall Cutouts, <24 SF	82.48	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

02 41 19 13-0338 Concrete Block Wall Cutouts *(02 41 19 13-0312)*
Note: Excludes toothing.

02 41 19 13-0339	SF	4" Thick Concrete Block Wall Cutouts, <24 SF	34.53	
02 41 19 13-0340	SF	6" Thick Concrete Block Wall Cutouts, <24 SF	36.57	
02 41 19 13-0341	SF	8" Thick Concrete Block Wall Cutouts, <24 SF	38.63	
02 41 19 13-0342	SF	10" Thick Concrete Block Wall Cutouts, <24 SF	40.71	
02 41 19 13-0343	SF	12" Thick Concrete Block Wall Cutouts, <24 SF	41.76	
02 41 19 13-0344	SF	16" Thick Concrete Block Wall Cutouts, <24 SF	43.85	

02 41 19 13-0345 Limestone Cutouts *(02 41 19 13-0312)*

02 41 19 13-0346	SF	2" Thick Limestone Cutouts, <24 SF	58.46	
02 41 19 13-0347	SF	4" Thick Limestone Cutouts, <24 SF	70.99	
02 41 19 13-0348	SF	6" Thick Limestone Cutouts, <24 SF	75.17	
02 41 19 13-0349	SF	8" Thick Limestone Cutouts, <24 SF	79.34	
02 41 19 13-0350	SF	10" Thick Limestone Cutouts, <24 SF	83.51	
02 41 19 13-0351	SF	12" Thick Limestone Cutouts, <24 SF	87.70	

02 41 19 13-0352 Toothing Masonry Cutouts *(02 41 19 13-0312)*
Note: For use where existing masonry must be removed in a toothing pattern along horizontal and vertical mortar joints. VLF measurement includes all horizontal cutting.

02 41 19 13-0353	VLF	Brick, Soft Old Mortar, Toothing Masonry Cutouts	20.88	
02 41 19 13-0354	VLF	Brick, Hard Mortar, Toothing Masonry Cutouts	28.19	
02 41 19 13-0355	VLF	Concrete Block, Soft Old Mortar, Toothing Masonry Cutouts	12.53	
02 41 19 13-0356	VLF	Concrete Block, Hard Mortar, Toothing Masonry Cutouts	16.70	

02 41 19 13-0357 Minimum Charge For Cutouts *(02 41 19 13-0312)*
Note: For projects where the total cutouts charge is less than the minimum charge, use this task exclusively. This task should not be used in conjunction with any other tasks in this section.

02 41 19 13-0358	EA	Minimum Charge For Cutouts	417.59	

02 60 Contaminated Site Material Removal *(02)*

02 61 Removal and Disposal of Contaminated Soils *(02 60)*

02 61 26 Removal and Disposal of Asbestos Contaminated Soils *(02 61)*
Note: Includes materials, equipment, mobilization, preparation, signage, removal, transportation for up to 25 miles, disposal of waste at transfer facility or final destination, personnel health monitoring, negative air, documentation and other associated costs necessary for the complete abatement and disposal of the ACM in accordance with EPA, OSHA, and local regulations. Where types of ACM are listed by quantity, the quantity of the entire project, not a particular work area, is to be used in determining which task applies. For certain types of work, there is a task with a unit of measure of CF for a quantity of less than 10 CF, followed by a series of tasks for other quantities. For those tasks the contractor will be paid the first task with a unit of measure of EA, plus an additional task to arrive at the appropriate quantity for the project.

02 61 26 00-0001 Removal and Disposal of Asbestos Contaminated Soils *(02 61 26)*
Note: Includes materials, equipment, mobilization, preparation, signage, removal, transportation for up to 25 miles, disposal of waste at transfer facility or final destination, personnel health monitoring, negative air, documentation and other associated costs necessary for the complete abatement and disposal of the ACM in accordance with EPA, OSHA, and local regulations. Where types of ACM are listed by quantity, the quantity of the entire project, not a particular work area, is to be used in determining which task applies. For certain types of work, there is a task with a unit of measure of CF for a quantity of less than 10 CF, followed by a series of tasks for other quantities. For those tasks the contractor will be paid the first task with a unit of measure of EA, plus an additional task to arrive at the appropriate quantity for the project.

02 61 26 00-0002	EA	Up To 10 CF, Asbestos Contaminated Soil, Asbestos Abatement And Disposal	1,280.56	
		For Work In Restricted Working Space, Add		*384.17*
02 61 26 00-0003	CF	>10 To 100 CF, Asbestos Contaminated Soil, Asbestos Abatement And Disposal	84.89	
		For Work In Restricted Working Space, Add		*25.47*
02 61 26 00-0004	CF	>100 To 250 CF, Asbestos Contaminated Soil, Asbestos Abatement And Disposal	56.59	
		For Work In Restricted Working Space, Add		*16.98*
02 61 26 00-0005	CF	>250 To 500 CF, Asbestos Contaminated Soil, Asbestos Abatement And Disposal	42.51	
		For Work In Restricted Working Space, Add		*12.75*
02 61 26 00-0006	CF	>500 To 2,500 CF, Asbestos Contaminated Soil, Asbestos Abatement And Disposal	33.95	
		For Work In Restricted Working Space, Add		*10.19*
02 61 26 00-0007	CF	>2,500 To 10,000 CF, Asbestos Contaminated Soil, Asbestos Abatement And Disposal	28.86	
		For Work In Restricted Working Space, Add		*8.66*
02 61 26 00-0008	CF	>10,000 CF, Asbestos Contaminated Soil, Asbestos Abatement And Disposal	25.97	
		For Work In Restricted Working Space, Add		*7.79*

02 80 Facility Remediation *(02)*

02 81 Transportation and Disposal of Hazardous Materials *(02 80)*

02 81 00 00-0001 Equipment Oil Drain And Disposal *(02 81)*

02 81 00 00-0002	TRIP	Drain Oil Filled Equipment, Place In Approved Container And Transport To Disposal Site Note: Excludes Disposal Cost.	695.06
02 81 00 00-0003	DRM	Disposal Of Non-Polychlorinated Biphenyl (PCB) Oil In Normal Landfill, Per Partial Or Full 55-Gallon Drum Note: Excludes draining, placing in approved container, and transporting to disposal site.	109.22

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 81 00 00-0004	DRM	Disposal Of Non-Toxic Polychlorinated Biphenyl (PCB) Oil Into A Lined Landfill, Per Partial Or Full 55-Gallon Drum Note: Excludes draining, placing in approved container, and transporting to disposal site.	496.48	
02 81 00 00-0005	DRM	Disposal of Toxic Polychlorinated Biphenyl (PCB) Oil By Incineration, Per Partial Or Full 55-Gallon Drum Note: Excludes draining, placing in approved container, and transporting to disposal site.	893.66	
02 81 00 00-0006	CF	Hazardous Polychlorinated Biphenyl (PCB) Oil Filled Equipment Disposal At Approved Site Note: Includes handling of equipment and disposal at approved site. Excludes draining of PCB contaminated oil prior to disposal.	119.20	

02 82 Asbestos Remediation *(02 80)*

See CSI section 01 56 16 00-0043 for temporary stud walls, 01 74 19 00-0039 for hauling in excess of 25 miles to transfer or disposal site, 02 89 00 00-0008 for plastic sheeting for containment construction, 02 89 00 00-0015 for decontamination chambers.

02 82 13 Asbestos Abatement *(02 82)*

02 82 13 00-0001 Air Monitoring And Bulk Sampling, Asbestos Testing *(02 82 13)*

Note: Includes packaging of sample for shipping, shipping to testing lab, chain of custody documentation, analysis of sample, lab report, and sample disposal. Polarizing Light Microscope (PLM), Phase Contrast Microscope (PCM), and Transmission Electron Microscope (TEM). Excludes sampling time.

02 82 13 00-0002	HR	Certified Asbestos Air Sampling Technician For Bulk Sampling Or Air Monitoring	103.49
02 82 13 00-0003	EA	48 Hours Or Longer Turnaround, (Bulk Point Counting) PLM Test, Asbestos Testing	64.66
02 82 13 00-0004	EA	Next Day Turnaround, (Bulk Point Counting) PLM Test, Asbestos Testing	75.81
02 82 13 00-0005	EA	Same Day Turnaround, (Bulk Point Counting) PLM Test, Asbestos Testing	120.41
02 82 13 00-0006	EA	48 Hours Or Longer Turnaround, (Bulk) TEM Test, Asbestos Testing	207.37
02 82 13 00-0007	EA	Next Day Turnaround, (Bulk) TEM Test, Asbestos Testing	251.97
02 82 13 00-0008	EA	48 Hours Or Longer Turnaround, (Air) PCM Test, Asbestos Testing	51.29
02 82 13 00-0009	EA	Next Day Turnaround, (Air) PCM Test, Asbestos Testing	62.43
02 82 13 00-0010	EA	Same Day Turnaround, (Air) PCM Test, Asbestos Testing	84.73
02 82 13 00-0011	EA	48 Hours Or Longer Turnaround, (Air Point Counting) PLM Test	64.66
02 82 13 00-0012	EA	Next Day Turnaround, (Air Point Counting) PLM Test	75.81
02 82 13 00-0013	EA	Same Day Turnaround, (Air Point Counting) PLM Test	120.41
02 82 13 00-0014	EA	48 Hours Or Longer Turnaround, (Air) TEM Test, Asbestos Testing	207.37
02 82 13 00-0015	EA	Next Day Turnaround, (Air) TEM Test, Asbestos Testing	238.59
02 82 13 00-0016	EA	Same Day Turnaround, (Air) TEM Test, Asbestos Testing	332.24

02 82 16 Engineering Control of Asbestos Containing Materials *(02 82)*

02 82 16 00-0001 Asbestos Encapsulation (Lock-Down) *(02 82 16)*

02 82 16 00-0002	SF	Asbestos Encapsulant Spray Adhesive (Lock-Down), Per Coat	1.77
02 82 16 00-0003	SF	Asbestos Binding Compound Encapsulant/Sealant, Per Coat Required (Fiberlock® ABC® Asbestos Binding Compound)	2.41
02 82 16 00-0004	SF	Asbestos Fiberspray Encapsulation (Fiberlock® ABC Fiberspray®)	2.62
02 82 16 00-0005	SF	Asbestos Acrylic Encasement/Encapsulation (Fiberlock® Lag-Kote®)	2.84
02 82 16 00-0006	SF	Water Activated Repair Cloth Encapsulant (Fiberlock® Lag-Kwik®)	8.80
02 82 16 00-0007	SF	Water Activated Repair Cloth Encapsulant (Fiberlock® Lag-Kloth®)	9.98

02 82 33 Removal and Disposal of Asbestos Containing Materials *(02 82)*

Note: Includes materials, equipment, mobilization, preparation, critical barriers (e.g. electrical outlets, registers, windows, etc.), signage, removal, lockdown encapsulant applied to surfaces, bagging, cleanup, vacuuming, transportation for up to 25 miles, disposal of waste at transfer facility or final destination, personnel health monitoring, negative air, documentation and other associated costs necessary for the complete abatement and disposal of the ACM in accordance with EPA, OSHA, and local regulations. Where types of ACM are listed by quantity, the quantity of the entire project, not a particular work area, is to be used in determining which task applies. For certain types of work, there is a task with a unit of measure of SET for a quantity of less than 10 LF or SF (10 LF to 20 LF for ACM pipe insulation), followed by a series of tasks for other quantities. The SET task includes portion for set-up and mobilization. For those tasks the contractor will be paid the first task of SET with a unit of measure of EA, plus an additional task to arrive at the appropriate quantity for the project.

02 82 33 00-0001 Pipe And Pipe Fittings Insulation, Asbestos Abatement And Disposal *(02 82 33)*

02 82 33 00-0002 Pipe Insulation, Asbestos Abatement And Disposal *(02 82 33 00-0001)*

Note: Diameter is outer size of insulation. Treat fittings as additional linear feet of insulation.

02 82 33 00-0003 Up To 6" Diameter Pipe Insulation, Asbestos Abatement And Disposal *(02 82 33 00-0002)*

See CSI section 02 82 33 00-0031 for projects with less than 10 LF.

02 82 33 00-0004	SET	Up To 20 LF, Up To 6" Diameter Pipe Insulation, Asbestos Abatement And Disposal	1,297.03	
		For Work In Restricted Working Space, Add	*384.17*	
02 82 33 00-0005	LF	>20 To 250 LF, Up To 6" Diameter Pipe Insulation, Asbestos Abatement And Disposal	44.48	
		For Work In Restricted Working Space, Add	*13.10*	
02 82 33 00-0006	LF	>250 To 500 LF, Up To 6" Diameter Pipe Insulation, Asbestos Abatement And Disposal	33.56	
		For Work In Restricted Working Space, Add	*9.82*	
02 82 33 00-0007	LF	>500 To 2,500 LF, Up To 6" Diameter Pipe Insulation, Asbestos Abatement And Disposal	25.37	
		For Work In Restricted Working Space, Add	*7.37*	
02 82 33 00-0008	LF	>2,500 To 10,000 LF, Up To 6" Diameter Pipe Insulation, Asbestos Abatement And Disposal	19.23	
		For Work In Restricted Working Space, Add	*5.52*	
02 82 33 00-0009	LF	>10,000 LF, Up To 6" Diameter Pipe Insulation, Asbestos Abatement And Disposal	16.84	
		For Work In Restricted Working Space, Add	*4.81*	

02 82 33 00-0010 >6" To 12" Diameter Pipe Insulation, Asbestos Abatement And Disposal *(02 82 33 00-0002)*

See CSI section 02 82 33 00-0031 for projects with less than 10 LF.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 82 33 00-0011	SET	Up To 20 LF, >6" To 12" Diameter Pipe Insulation, Asbestos Abatement And Disposal	1,313.50	
		For Work In Restricted Working Space, Add	*384.17*	
02 82 33 00-0012	LF	>20 To 250 LF, >6" To 12" Diameter Pipe Insulation, Asbestos Abatement And Disposal	51.85	
		For Work In Restricted Working Space, Add	*15.06*	
02 82 33 00-0013	LF	>250 To 500 LF, >6" To 12" Diameter Pipe Insulation, Asbestos Abatement And Disposal	39.30	
		For Work In Restricted Working Space, Add	*11.30*	
02 82 33 00-0014	LF	>500 To 2,500 LF, >6" To 12" Diameter Pipe Insulation, Asbestos Abatement And Disposal	29.89	
		For Work In Restricted Working Space, Add	*8.47*	
02 82 33 00-0015	LF	>2,500 To 10,000 LF, >6" To 12" Diameter Pipe Insulation, Asbestos Abatement And Disposal	22.82	
		For Work In Restricted Working Space, Add	*6.35*	
02 82 33 00-0016	LF	>10,000 LF, >6" To 12" Diameter Pipe Insulation, Asbestos Abatement And Disposal	20.07	
		For Work In Restricted Working Space, Add	*5.53*	

02 82 33 00-0017 >12" To 18" Diameter Pipe Insulation, Asbestos Abatement And Disposal *(02 82 33 00-0002)*

See CSI section 02 82 33 00-0031 for projects with less than 10 LF.

02 82 33 00-0018	SET	Up To 20 LF, >12" To 18" Diameter Pipe Insulation, Asbestos Abatement And Disposal	1,329.97	
		For Work In Restricted Working Space, Add	*384.17*	
02 82 33 00-0019	LF	>20 To 250 LF, >12" To 18" Diameter Pipe Insulation, Asbestos Abatement And Disposal	69.15	
		For Work In Restricted Working Space, Add	*20.09*	
02 82 33 00-0020	LF	>250 To 500 LF, >12" To 18" Diameter Pipe Insulation, Asbestos Abatement And Disposal	52.39	
		For Work In Restricted Working Space, Add	*15.06*	
02 82 33 00-0021	LF	>500 To 2,500 LF, >12" To 18" Diameter Pipe Insulation, Asbestos Abatement And Disposal	39.85	
		For Work In Restricted Working Space, Add	*11.30*	
02 82 33 00-0022	LF	>2,500 To 10,000 LF, >12" To 18" Diameter Pipe Insulation, Asbestos Abatement And Disposal	30.43	
		For Work In Restricted Working Space, Add	*8.47*	
02 82 33 00-0023	LF	>10,000 LF, >12" To 18" Diameter Pipe Insulation, Asbestos Abatement And Disposal	26.75	
		For Work In Restricted Working Space, Add	*7.37*	

02 82 33 00-0024 >18" To 24" Diameter Pipe Insulation, Asbestos Abatement And Disposal *(02 82 33 00-0002)*

See CSI section 02 82 33 00-0031 for projects with less than 10 LF.

02 82 33 00-0025	SET	Up To 20 LF, >18" To 24" Diameter Pipe Insulation, Asbestos Abatement And Disposal	1,346.44	
		For Work In Restricted Working Space, Add	*384.17*	
02 82 33 00-0026	LF	>20 To 250 LF, >18" To 24" Diameter Pipe Insulation, Asbestos Abatement And Disposal	95.07	
		For Work In Restricted Working Space, Add	*27.62*	
02 82 33 00-0027	LF	>250 To 500 LF, >18" To 24" Diameter Pipe Insulation, Asbestos Abatement And Disposal	72.04	
		For Work In Restricted Working Space, Add	*20.71*	
02 82 33 00-0028	LF	>500 To 2,500 LF, >18" To 24" Diameter Pipe Insulation, Asbestos Abatement And Disposal	54.79	
		For Work In Restricted Working Space, Add	*15.53*	
02 82 33 00-0029	LF	>2,500 To 10,000 LF, >18" To 24" Diameter Pipe Insulation, Asbestos Abatement And Disposal	41.84	
		For Work In Restricted Working Space, Add	*11.65*	
02 82 33 00-0030	LF	>10,000 LF, >18" To 24" Diameter Pipe Insulation, Asbestos Abatement And Disposal	36.78	
		For Work In Restricted Working Space, Add	*10.13*	

02 82 33 00-0031 Glove Bag Method, Pipe Insulation, Asbestos Abatement And Disposal *(02 82 33 00-0002)*

Note: Solid isolation barriers and plastic sheeting for containment construction (except on floor) are not required for glove bag projects unless required by local codes.

02 82 33 00-0032	SET	Glove Bag For First 3 LF Pipe Insulation, Asbestos Abatement And Disposal	832.82	
		For Work In Restricted Working Space, Add	*248.36*	
02 82 33 00-0033	LF	>3 To 20 LF Additional Glove Bag Work for Pipe Insulation	139.63	
		For Work In Restricted Working Space, Add	*41.39*	
02 82 33 00-0034	LF	>20 To 250 LF Additional Glove Bag Work for Pipe Insulation	55.21	
		For Work In Restricted Working Space, Add	*16.07*	
02 82 33 00-0035	LF	>250 To 500 LF Additional Glove Bag Work for Pipe Insulation	41.81	
		For Work In Restricted Working Space, Add	*12.05*	
02 82 33 00-0036	LF	>500 LF Additional Glove Bag Work for Pipe Insulation	31.77	
		For Work In Restricted Working Space, Add	*9.04*	

02 82 33 00-0037 Thermal Insulation, Asbestos Abatement And Disposal *(02 82 33)*

02 82 33 00-0038 Calcium Block Insulation, Asbestos Abatement And Disposal *(02 82 33 00-0037)*

02 82 33 00-0039	SET	Up To 10 SF, Calcium Block Insulation, Asbestos Abatement And Disposal	1,288.80
02 82 33 00-0040	SF	>10 To 500 SF, Calcium Block Insulation, Asbestos Abatement And Disposal	52.99
02 82 33 00-0041	SF	>500 To 2,500 SF, Calcium Block Insulation, Asbestos Abatement And Disposal	43.72
02 82 33 00-0042	SF	>2,500 To 10,000 SF, Calcium Block Insulation, Asbestos Abatement And Disposal	35.11
02 82 33 00-0043	SF	>10,000 SF, Calcium Block Insulation, Asbestos Abatement And Disposal	28.67

02 82 33 00-0044 Fibrous Glass Blanket Insulation, Asbestos Abatement And Disposal *(02 82 33 00-0037)*

02 82 33 00-0045	SET	Up To 10 SF, Fibrous Glass Blanket Insulation, Asbestos Abatement And Disposal	1,284.68
02 82 33 00-0046	SF	>10 To 500 SF, Fibrous Glass Blanket Insulation, Asbestos Abatement And Disposal	46.62
02 82 33 00-0047	SF	>500 To 2,500 SF, Fibrous Glass Blanket Insulation, Asbestos Abatement And Disposal	37.35
02 82 33 00-0048	SF	>2,500 To 10,000 SF, Fibrous Glass Blanket Insulation, Asbestos Abatement And Disposal	28.75
02 82 33 00-0049	SF	>10,000 SF, Fibrous Glass Blanket Insulation, Asbestos Abatement And Disposal	22.30

02 82 33 00-0050 Fibrous Glass Board Insulation, Asbestos Abatement And Disposal *(02 82 33 00-0037)*

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 82 33 00-0051	SET	Up To 10 SF, Fibrous Glass Board Insulation, Asbestos Abatement And Disposal	1,283.31	
02 82 33 00-0052	SF	>10 To 500 SF, Fibrous Glass Board Insulation, Asbestos Abatement And Disposal	41.36	
02 82 33 00-0053	SF	>500 To 2,500 SF, Fibrous Glass Board Insulation, Asbestos Abatement And Disposal	32.09	
02 82 33 00-0054	SF	>2,500 To 10,000 SF, Fibrous Glass Board Insulation, Asbestos Abatement And Disposal	23.48	
02 82 33 00-0055	SF	>10,000 SF, Fibrous Glass Board Insulation, Asbestos Abatement And Disposal	17.03	
02 82 33 00-0056		Other Thermal Insulation, Up To 3" Thickness, Asbestos Abatement And Disposal *(02 82 33 00-0037)*		
		Note: e.g., duct, boiler, tank, etc.		
02 82 33 00-0057	SET	Up To 25 SF, Up To 3" Thickness Thermal Insulation, Asbestos Abatement And Disposal	1,290.85	
02 82 33 00-0058	SF	>25 To 500 SF, Up To 3" Thickness Thermal Insulation, Asbestos Abatement And Disposal	44.07	
02 82 33 00-0059	SF	>500 To 2,500 SF, Up To 3" Thickness Thermal Insulation, Asbestos Abatement And Disposal	34.80	
02 82 33 00-0060	SF	>2,500 To 10,000 SF, Up To 3" Thickness Thermal Insulation, Asbestos Abatement And Disposal	26.19	
02 82 33 00-0061	SF	>10,000 SF, Up To 3" Thickness Thermal Insulation, Asbestos Abatement And Disposal	19.75	
02 82 33 00-0062		Surfacing Material, Asbestos Abatement And Disposal *(02 82 33)*		
02 82 33 00-0063		Fireproofing For Small Areas, Asbestos Abatement And Disposal *(02 82 33 00-0062)*		
		Note: For asbestos abatement for up to 1 SF sections to expose area for attachments. See CSI section 02 82 33 00-0065 for areas > 1 SF see CSI section.		
02 82 33 00-0064	EA	Up To 1 SF, Fireproofing For Small Areas, Asbestos Abatement And Disposal	213.84	
		Note: For asbestos abatement for up to 1 SF sections to expose steel area for welding attachments.		
02 82 33 00-0065		Fireproofing, Asbestos Abatement And Disposal *(02 82 33 00-0062)*		
		Note: Exposed surface area, includes associated overspray.		
02 82 33 00-0066	SET	Up To 25 SF, Fireproofing, Asbestos Abatement And Disposal	1,290.85	
02 82 33 00-0067	SF	>25 To 500 SF, Fireproofing, Asbestos Abatement And Disposal	52.78	
02 82 33 00-0068	SF	>500 To 2,500 SF, Fireproofing, Asbestos Abatement And Disposal	39.68	
02 82 33 00-0069	SF	>2,500 To 10,000 SF, Fireproofing, Asbestos Abatement And Disposal	29.86	
02 82 33 00-0070	SF	>10,000 SF, Fireproofing, Asbestos Abatement And Disposal	22.49	
02 82 33 00-0071		Acoustical Plaster, Asbestos Abatement And Disposal *(02 82 33 00-0062)*		
		Note: Remove surface coat from brown coat or remove entire assembly, including lathe and finish materials.		
02 82 33 00-0072	SET	Up To 25 SF, Acoustical Plaster, Asbestos Abatement And Disposal	1,287.42	
02 82 33 00-0073	SF	>25 To 500 SF, Acoustical Plaster, Asbestos Abatement And Disposal	22.14	
02 82 33 00-0074	SF	>500 To 2,500 SF, Acoustical Plaster, Asbestos Abatement And Disposal	16.81	
02 82 33 00-0075	SF	>2,500 To 10,000 SF, Acoustical Plaster, Asbestos Abatement And Disposal	12.54	
02 82 33 00-0076	SF	>10,000 SF, Acoustical Plaster, Asbestos Abatement And Disposal	9.34	
02 82 33 00-0077		Gypsum Wall Board, Asbestos Abatement And Disposal *(02 82 33 00-0062)*		
02 82 33 00-0078	SET	Up To 50 SF, Single Layer Gypsum Wall Board, Asbestos Abatement And Disposal	1,294.29	
		For Additional Layer, Add	*352.15*	
02 82 33 00-0079	SF	>50 To 500 SF, Single Layer Gypsum Wall Board, Asbestos Abatement And Disposal	17.08	
		For Additional Layer, Add	*4.62*	
02 82 33 00-0080	SF	>500 To 2,500 SF, Single Layer Gypsum Wall Board, Asbestos Abatement And Disposal	12.54	
		For Additional Layer, Add	*3.37*	
02 82 33 00-0081	SF	>2,500 To 10,000 SF, Single Layer Gypsum Wall Board, Asbestos Abatement And Disposal	9.87	
		For Additional Layer, Add	*2.64*	
02 82 33 00-0082	SF	>10,000 To 50,000 SF, Single Layer Gypsum Wall Board, Asbestos Abatement And Disposal	7.74	
		For Additional Layer, Add	*2.05*	
02 82 33 00-0083	SF	>50,000 To 100,000 SF, Single Layer Gypsum Wall Board, Asbestos Abatement And Disposal	6.13	
		For Additional Layer, Add	*1.61*	
02 82 33 00-0084	SF	>100,000 SF, Single Layer Gypsum Wall Board, Asbestos Abatement And Disposal	4.96	
		For Additional Layer, Add	*1.29*	
02 82 33 00-0085		Gypsum Wall Board (Or Backer Board) With Ceramic Tile And Mastic, Asbestos Abatement And Disposal *(02 82 33 00-0062)*		
02 82 33 00-0086	SET	Up To 25 SF, Gypsum Wall Board (Or Backer Board) With Ceramic Tile And Mastic, Asbestos Abatement And Disposal	1,287.42	
02 82 33 00-0087	SF	>25 To 500 SF, Gypsum Wall Board (Or Backer Board) With Ceramic Tile And Mastic, Asbestos Abatement And Disposal	32.18	
02 82 33 00-0088	SF	>500 To 2,500 SF, Gypsum Wall Board (Or Backer Board) With Ceramic Tile And Mastic, Asbestos Abatement And Disposal	23.64	
02 82 33 00-0089	SF	>2,500 To 10,000 SF, Gypsum Wall Board (Or Backer Board) With Ceramic Tile And Mastic, Asbestos Abatement And Disposal	18.52	
02 82 33 00-0090	SF	>10,000 To 50,000 SF, Gypsum Wall Board (Or Backer Board) With Ceramic Tile And Mastic, Asbestos Abatement And Disposal	14.47	
02 82 33 00-0091	SF	>50,000 SF, Gypsum Wall Board (Or Backer Board) With Ceramic Tile And Mastic, Asbestos Abatement And Disposal	10.41	
02 82 33 00-0092		Stucco, Asbestos Abatement And Disposal *(02 82 33 00-0062)*		
02 82 33 00-0093	SET	Up To 50 SF, Stucco, Asbestos Abatement And Disposal	1,294.29	
02 82 33 00-0094	SF	>50 To 500 SF, Stucco, Asbestos Abatement And Disposal	28.11	
02 82 33 00-0095	SF	>500 To 2,500 SF, Stucco, Asbestos Abatement And Disposal	21.12	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 82 33 00-0096	SF	>2,500 To 10,000 SF, Stucco, Asbestos Abatement And Disposal	15.94	
02 82 33 00-0097	SF	>10,000 SF, Stucco, Asbestos Abatement And Disposal	12.01	
02 82 33 00-0098		**Spray On Acoustical Ceiling, Asbestos Abatement And Disposal** *(02 82 33 00-0062)*		
02 82 33 00-0099	SET	Up To 50 SF, Spray On Acoustical Ceiling, Asbestos Abatement And Disposal	1,294.29	
02 82 33 00-0100	SF	>50 To 500 SF, Spray On Acoustical Ceiling, Asbestos Abatement And Disposal	14.50	
02 82 33 00-0101	SF	>500 To 2,500 SF, Spray On Acoustical Ceiling, Asbestos Abatement And Disposal	11.22	
02 82 33 00-0102	SF	>2,500 To 10,000 SF, Spray On Acoustical Ceiling, Asbestos Abatement And Disposal	8.27	
02 82 33 00-0103	SF	>10,000 SF, Spray On Acoustical Ceiling, Asbestos Abatement And Disposal	6.26	
02 82 33 00-0104		**Plywood, Asbestos Abatement And Disposal** *(02 82 33 00-0062)*		
02 82 33 00-0105	SET	Up To 40 SF, Plywood, Asbestos Abatement And Disposal	1,291.54	
02 82 33 00-0106	SF	>50 To 500 SF, Plywood, Asbestos Abatement And Disposal	18.41	
02 82 33 00-0107	SF	>500 To 2,500 SF, Plywood, Asbestos Abatement And Disposal	9.00	
02 82 33 00-0108	SF	>2,500 To 10,000 SF, Plywood, Asbestos Abatement And Disposal	6.17	
02 82 33 00-0109	SF	>10,000 SF, Plywood, Asbestos Abatement And Disposal	5.28	
02 82 33 00-0110		**Flooring Material, Asbestos Abatement And Disposal** *(02 82 33)*		
02 82 33 00-0111		**Floor Tile, Linoleum, Carpet Or Base, Asbestos Abatement And Disposal** *(02 82 33 00-0110)*		
02 82 33 00-0112		**Floor Tile, Asbestos Abatement And Disposal** *(02 82 33 00-0111)*		
		Note: Single layer or first of multiple layers. Excludes mastic.		
02 82 33 00-0113	SET	Up To 100 SF, Single Layer Or First Of Multiple Layers, Floor Tile, Asbestos Abatement And Disposal	1,283.31	
		For Each Additional Layer, Add	*192.50*	
02 82 33 00-0114	SF	>100 To 500 SF, Single Layer Or First Of Multiple Layers, Floor Tile, Asbestos Abatement And Disposal	9.00	
		For Each Additional Layer, Add	*1.35*	
02 82 33 00-0115	SF	>500 To 2,500 SF, Single Layer Or First Of Multiple Layers, Floor Tile, Asbestos Abatement And Disposal	7.37	
		For Each Additional Layer, Add	*1.11*	
02 82 33 00-0116	SF	>2,500 To 10,000 SF, Single Layer Or First Of Multiple Layers, Floor Tile, Asbestos Abatement And Disposal	5.87	
		For Each Additional Layer, Add	*0.88*	
02 82 33 00-0117	SF	>10,000 SF, Single Layer Or First Of Multiple Layers, Floor Tile, Asbestos Abatement And Disposal	4.06	
		For Each Additional Layer, Add	*0.61*	
02 82 33 00-0118		**Linoleum Or Vinyl Sheet, Asbestos Abatement And Disposal** *(02 82 33 00-0111)*		
		Note: Single layer or first of multiple layers. Excludes mastic.		
02 82 33 00-0119	SET	Up To 100 SF, Single Layer Or Multiple Layers, Linoleum Or Vinyl Sheet, Asbestos Abatement And Disposal	1,283.31	
		For Each Additional Layer, Add	*192.50*	
02 82 33 00-0120	SF	>100 To 500 SF, Single Layer Or Multiple Layers, Linoleum Or Vinyl Sheet, Asbestos Abatement And Disposal	9.00	
		For Each Additional Layer, Add	*1.35*	
02 82 33 00-0121	SF	>500 To 2,500 SF, Single Layer Or Multiple Layers, Linoleum Or Vinyl Sheet, Asbestos Abatement And Disposal	7.39	
		For Each Additional Layer, Add	*1.11*	
02 82 33 00-0122	SF	>2,500 To 10,000 SF, Single Layer Or Multiple Layers, Linoleum Or Vinyl Sheet, Asbestos Abatement And Disposal	6.71	
		For Each Additional Layer, Add	*1.01*	
02 82 33 00-0123	SF	>10,000 SF, Single Layer Or Multiple Layers, Linoleum Or Vinyl Sheet, Asbestos Abatement And Disposal	5.42	
		For Each Additional Layer, Add	*0.81*	
02 82 33 00-0124		**Carpet, Asbestos Abatement And Disposal** *(02 82 33 00-0111)*		
02 82 33 00-0125	SET	Up To 100 SF, Carpet With Non-Friable Asbestos Mastic, Asbestos Abatement And Disposal	1,283.31	
02 82 33 00-0126	SF	>100 To 500 SF, Carpet With Non-Friable Asbestos Mastic, Asbestos Abatement And Disposal	7.05	
02 82 33 00-0127	SF	>500 To 2,500 SF, Carpet With Non-Friable Asbestos Mastic, Asbestos Abatement And Disposal	5.71	
02 82 33 00-0128	SF	>2,500 To 10,000 SF, Carpet With Non-Friable Asbestos Mastic, Asbestos Abatement And Disposal	4.17	
02 82 33 00-0129	SF	>10,000 SF, Carpet With Non-Friable Asbestos Mastic, Asbestos Abatement And Disposal	3.17	
02 82 33 00-0130		**Wall Or Cove Base, Asbestos Abatement And Disposal** *(02 82 33 00-0111)*		
		Note: Up to 12".		
02 82 33 00-0131	SET	Up To 25 LF, Wall Base And Mastic, Asbestos Abatement And Disposal	430.28	
02 82 33 00-0132	LF	>25 To 100 LF, Wall Base And Mastic, Asbestos Abatement And Disposal	5.83	
02 82 33 00-0133	LF	>100 To 500 LF, Wall Base And Mastic, Asbestos Abatement And Disposal	3.56	
02 82 33 00-0134	LF	>500 To 2,500 LF, Wall Base And Mastic, Asbestos Abatement And Disposal	2.28	
02 82 33 00-0135	LF	>2,500 LF, Wall Base And Mastic, Asbestos Abatement And Disposal	1.64	
02 82 33 00-0136		**Mastic, Asbestos Abatement And Disposal** *(02 82 33 00-0110)*		
		Note: Applies to single layer or bottom layer only of multiple layers. Non-hydrocarbon with pine, citrus or no odor.		
02 82 33 00-0137	SET	Up To 100 SF, Mastic, Asbestos Abatement And Disposal	1,287.43	
		Note: Applies to bottom layer only if multiple layers.		
02 82 33 00-0138	SF	>100 To 500 SF, Mastic, Asbestos Abatement And Disposal	3.26	
		Note: Applies to bottom layer only if multiple layers.		
02 82 33 00-0139	SF	>500 To 2,500 SF, Mastic, Asbestos Abatement And Disposal	2.41	
		Note: Applies to bottom layer only if multiple layers.		
02 82 33 00-0140	SF	>2,500 To 10,000 SF, Mastic, Asbestos Abatement And Disposal	1.87	
		Note: Applies to bottom layer only if multiple layers.		
02 82 33 00-0141	SF	>10,000 SF, Mastic, Asbestos Abatement And Disposal	1.51	
		Note: Applies to bottom layer only if multiple layers.		

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 82 33 00-0142		Hardwood Flooring System With Asbestos Barrier Paper Backing, Asbestos Abatement And Disposal *(02 82 33 00-0110)* Note: Includes finish wood, asbestos barrier paper, cleanup of sub-wood floor, fasteners, wood fillers and protection of clean crawl space from contamination.		
02 82 33 00-0143	SET	Up To 100 SF, Hardwood Flooring System With Asbestos Barrier Paper Backing, Asbestos Abatement And Disposal	1,308.02	
02 82 33 00-0144	SF	>100 To 500 SF, Hardwood Flooring System With Asbestos Barrier Paper Backing, Asbestos Abatement And Disposal	10.36	
02 82 33 00-0145	SF	>500 To 2,500 SF, Hardwood Flooring System With Asbestos Barrier Paper Backing, Asbestos Abatement And Disposal	7.63	
02 82 33 00-0146	SF	>2,500 To 10,000 SF, Hardwood Flooring System With Asbestos Barrier Paper Backing, Asbestos Abatement And Disposal	6.03	
02 82 33 00-0147	SF	>10,000 SF, Hardwood Flooring System With Asbestos Barrier Paper Backing, Asbestos Abatement And Disposal	4.75	
02 82 33 00-0148		Mastic Contaminated Wood Sub-Flooring, Asbestos Abatement And Disposal *(02 82 33 00-0110)* Note: Includes removal of all anchors.		
02 82 33 00-0149	SF	Mastic-Contaminated Wood Sub-Flooring, Asbestos Abatement And Disposal Note: Includes removal of all anchors.	4.62	
02 82 33 00-0150		Cementitious Underlayment For Flooring, Asbestos Abatement And Disposal *(02 82 33 00-0110)*		
02 82 33 00-0151	SET	Up To 100 SF, Cementitious Underlayment For Flooring, Asbestos Abatement And Disposal	1,294.28	
02 82 33 00-0152	SF	>100 To 500 SF, Cementitious Underlayment For Flooring, Asbestos Abatement And Disposal	11.56	
02 82 33 00-0153	SF	>500 To 2,500 SF, Cementitious Underlayment For Flooring, Asbestos Abatement And Disposal Note: Includes detachment of mounted objects before removal.	7.61	
02 82 33 00-0154	SF	>2,500 To 10,000 SF, Cementitious Underlayment For Flooring, Asbestos Abatement And Disposal	6.00	
02 82 33 00-0155	SF	>10,000 SF, Cementitious Underlayment For Flooring, Asbestos Abatement And Disposal	4.94	
02 82 33 00-0156		Roofing, Asbestos Abatement And Disposal *(02 82 33)*		
02 82 33 00-0157		Built-Up Tar And Felt Roofing, Asbestos Abatement And Disposal *(02 82 33 00-0156)* Note: Includes roofing, flashing, sheet metal, insulation, pitch pockets, board etc.		
02 82 33 00-0158		Up To 2" Average Thickness, Built-Up Tar And Felt Roofing, Asbestos Abatement And Disposal *(02 82 33 00-0157)*		
02 82 33 00-0159	SET	Up To 125 SF, Up To 2" Average Thickness, Built-Up Tar And Felt Roofing, Asbestos Abatement And Disposal	1,314.88	
02 82 33 00-0160	SF	>125 To 1,000 SF, Up To 2" Average Thickness, Built-Up Tar And Felt Roofing, Asbestos Abatement And Disposal	8.45	
02 82 33 00-0161	SF	>1,000 To 5,000 SF, Up To 2" Average Thickness, Built-Up Tar And Felt Roofing, Asbestos Abatement And Disposal	6.83	
02 82 33 00-0162	SF	>5,000 To 10,000 SF, Up To 2" Average Thickness, Built-Up Tar And Felt Roofing, Asbestos Abatement And Disposal	5.51	
02 82 33 00-0163	SF	>10,000 To 20,000 SF, Up To 2" Average Thickness, Built-Up Tar And Felt Roofing, Asbestos Abatement And Disposal	4.20	
02 82 33 00-0164	SF	>20,000 SF, Up To 2" Average Thickness, Built-Up Tar And Felt Roofing, Asbestos Abatement And Disposal	3.22	
02 82 33 00-0165		>2" To 5" Average Thickness, Built-Up Tar And Felt Roofing, Asbestos Abatement And Disposal *(02 82 33 00-0157)*		
02 82 33 00-0166	SET	Up To 110 SF, >2" To 5" Average Thickness, Built-Up Tar And Felt Roofing, Asbestos Abatement And Disposal	1,340.95	
02 82 33 00-0167	SF	>110 To 1,000 SF, >2" To 5" Average Thickness, Built-Up Tar And Felt Roofing, Asbestos Abatement And Disposal	9.87	
02 82 33 00-0168	SF	>1,000 To 5,000 SF, >2" To 5" Average Thickness, Built-Up Tar And Felt Roofing, Asbestos Abatement And Disposal	7.98	
02 82 33 00-0169	SF	>5,000 To 10,000 SF, >2" To 5" Average Thickness, Built-Up Tar And Felt Roofing, Asbestos Abatement And Disposal	6.53	
02 82 33 00-0170	SF	>10,000 To 20,000 SF, >2" To 5" Average Thickness, Built-Up Tar And Felt Roofing, Asbestos Abatement And Disposal	5.03	
02 82 33 00-0171	SF	>20,000 SF, >2" To 5" Average Thickness, Built-Up Tar And Felt Roofing, Asbestos Abatement And Disposal	3.90	
02 82 33 00-0172		>5" Average Thickness, Built-Up Tar And Felt Roofing, Asbestos Abatement And Disposal *(02 82 33 00-0157)*		
02 82 33 00-0173	SET	Up To 110 SF, >5" Average Thickness, Built-Up Tar And Felt Roofing, Asbestos Abatement And Disposal	1,371.15	
02 82 33 00-0174	SF	>110 To 1,000 SF, >5" Average Thickness, Built-Up Tar And Felt Roofing, Asbestos Abatement And Disposal	11.18	
02 82 33 00-0175	SF	>1,000 To 5,000 SF, >5" Average Thickness, Built-Up Tar And Felt Roofing, Asbestos Abatement And Disposal	9.07	
02 82 33 00-0176	SF	>5,000 To 10,000 SF, >5" Average Thickness, Built-Up Tar And Felt Roofing, Asbestos Abatement And Disposal	7.47	
02 82 33 00-0177	SF	>10,000 To 20,000 SF, >5" Average Thickness, Built-Up Tar And Felt Roofing, Asbestos Abatement And Disposal	5.80	
02 82 33 00-0178	SF	>20,000 SF, >5" Average Thickness, Built-Up Tar And Felt Roofing, Asbestos Abatement And Disposal	4.55	
02 82 33 00-0179		Shingles And Felt Roofing, Asbestos Abatement And Disposal *(02 82 33 00-0156)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 82 33 00-0180		**Shingles And Felt Roofing, Asbestos Abatement And Disposal** *(02 82 33 00-0179)*		
02 82 33 00-0181	SET	Up To 125 SF, Shingles And Felt Roofing, Asbestos Abatement And Disposal Note: Single or first of multiple layers.	1,289.14	
02 82 33 00-0182	SF	>125 To 1,000 SF, Shingles And Felt Roofing, Asbestos Abatement And Disposal Note: Single or first of multiple layers.	8.25	
		For Each Additional Layer, Add	*1.65*	
02 82 33 00-0183	SF	>1,000 To 5,000 SF, Shingles And Felt Roofing, Asbestos Abatement And Disposal Note: Single or first of multiple layers.	6.63	
		For Each Additional Layer, Add	*1.33*	
02 82 33 00-0184	SF	>5,000 To 10,000 SF, Shingles And Felt Roofing, Asbestos Abatement And Disposal Note: Single or first of multiple layers.	5.31	
		For Each Additional Layer, Add	*1.06*	
02 82 33 00-0185	SF	>10,000 To 20,000 SF, Shingles And Felt Roofing, Asbestos Abatement And Disposal Note: Single or first of multiple layers.	4.00	
		For Each Additional Layer, Add	*0.80*	
02 82 33 00-0186	SF	>20,000 SF, Shingles And Felt Roofing, Asbestos Abatement And Disposal Note: Single or first of multiple layers.	3.02	
		For Each Additional Layer, Add	*0.60*	
02 82 33 00-0187		**Roof Penetration Mastic, Asbestos Abatement And Disposal** *(02 82 33 00-0156)*		
02 82 33 00-0188	SET	Up To 10 SF, Roof Penetration Mastic, Asbestos Abatement And Disposal	427.54	
02 82 33 00-0189	SF	>10 To 50 SF, Roof Penetration Mastic, Asbestos Abatement And Disposal	3.27	
02 82 33 00-0190	SF	>50 To 100 SF, Roof Penetration Mastic, Asbestos Abatement And Disposal	2.70	
02 82 33 00-0191	SF	>100 To 250 SF, Roof Penetration Mastic, Asbestos Abatement And Disposal	2.19	
02 82 33 00-0192	SF	>250 SF, Roof Penetration Mastic, Asbestos Abatement And Disposal	1.60	
02 82 33 00-0193		**Roof Curb Mastic, Asbestos Abatement And Disposal** *(02 82 33 00-0156)*		
02 82 33 00-0194	SET	Up To 10 LF, Roof Curb Mastic, Asbestos Abatement And Disposal	427.54	
02 82 33 00-0195	LF	>10 To 20 LF, Roof Curb Mastic, Asbestos Abatement And Disposal	9.67	
02 82 33 00-0196	LF	>20 To 50 LF, Roof Curb Mastic, Asbestos Abatement And Disposal	7.75	
02 82 33 00-0197	LF	>50 To 150 LF, Roof Curb Mastic, Asbestos Abatement And Disposal	6.48	
02 82 33 00-0198	LF	>150 LF, Roof Curb Mastic, Asbestos Abatement And Disposal	4.68	
02 82 33 00-0199		**Asbestos-Cement Products, Asbestos Abatement And Disposal** *(02 82 33)*		
02 82 33 00-0200		**Interior Asbestos-Cement Board, Asbestos Abatement And Disposal** *(02 82 33 00-0199)* Note: Includes detachment of mounted objects before removal.		
02 82 33 00-0201	SET	Up To 100 SF, Interior Asbestos-Cement Board, Asbestos Abatement And Disposal Note: Includes detachment of mounted objects before removal.	1,294.28	
02 82 33 00-0202	SF	>100 To 500 SF, Interior Asbestos-Cement Board, Asbestos Abatement And Disposal Note: Includes detachment of mounted objects before removal.	8.87	
02 82 33 00-0203	SF	>500 To 2,500 SF, Interior Asbestos-Cement Board, Asbestos Abatement And Disposal Note: Includes detachment of mounted objects before removal.	4.50	
02 82 33 00-0204	SF	>2,500 To 10,000 SF, Interior Asbestos-Cement Board, Asbestos Abatement And Disposal Note: Includes detachment of mounted objects before removal.	3.63	
02 82 33 00-0205	SF	>10,000 SF, Interior Asbestos-Cement Board, Asbestos Abatement And Disposal Note: Includes detachment of mounted objects before removal.	3.17	
02 82 33 00-0206		**Exterior Asbestos-Cement Board, Asbestos Abatement And Disposal** *(02 82 33 00-0199)*		
02 82 33 00-0207	SET	Up To 100 SF, Exterior Asbestos-Cement Board, Asbestos Abatement And Disposal	1,294.28	
02 82 33 00-0208	SF	>100 To 500 SF, Exterior Asbestos-Cement Board, Asbestos Abatement And Disposal	7.72	
02 82 33 00-0209	SF	>500 To 2,500 SF, Exterior Asbestos-Cement Board, Asbestos Abatement And Disposal	4.02	
02 82 33 00-0210	SF	>2,500 To 10,000 SF, Exterior Asbestos-Cement Board, Asbestos Abatement And Disposal	3.25	
02 82 33 00-0211	SF	>10,000 SF, Exterior Asbestos-Cement Board, Asbestos Abatement And Disposal	2.84	
02 82 33 00-0212		**Up To 12" Diameter Asbestos-Cement Pipe, Asbestos Abatement And Disposal** *(02 82 33 00-0199)*		
02 82 33 00-0213	SET	Up To 10 LF, Up To 12" Diameter Asbestos-Cement Pipe, Asbestos Abatement And Disposal	1,083.61	
02 82 33 00-0214	LF	>10 To 100 LF, Up To 12" Diameter Asbestos-Cement Pipe, Asbestos Abatement And Disposal	45.31	
02 82 33 00-0215	LF	>100 To 250 LF, Up To 12" Diameter Asbestos-Cement Pipe, Asbestos Abatement And Disposal	34.39	
02 82 33 00-0216	LF	>250 To 500 LF, Up To 12" Diameter Asbestos-Cement Pipe, Asbestos Abatement And Disposal	26.20	
02 82 33 00-0217	LF	>500 To 2,500 LF, Up To 12" Diameter Asbestos-Cement Pipe, Asbestos Abatement And Disposal	20.06	
02 82 33 00-0218	LF	>2,500 To 10,000 LF, Up To 12" Diameter Asbestos-Cement Pipe, Asbestos Abatement And Disposal	15.46	
02 82 33 00-0219	LF	>10,000 LF, Up To 12" Diameter Asbestos-Cement Pipe, Asbestos Abatement And Disposal	15.14	
02 82 33 00-0220		**Exterior Transite Siding, Asbestos Abatement And Disposal** *(02 82 33 00-0199)*		
02 82 33 00-0221	SET	Up To 125 SF, Exterior Transite Siding, Asbestos Abatement And Disposal Note: Single or first of multiple layers.	1,303.82	
02 82 33 00-0222	SF	>125 To 1,000 SF, Exterior Transite Siding, Asbestos Abatement And Disposal Note: Single or first of multiple layers.	6.96	
02 82 33 00-0223	SF	>1,000 To 5,000 SF, Exterior Transite Siding, Asbestos Abatement And Disposal Note: Single or first of multiple layers.	5.60	
02 82 33 00-0224	SF	>5,000 To 10,000 SF, Exterior Transite Siding, Asbestos Abatement And Disposal Note: Single or first of multiple layers.	4.50	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 82 33 00-0225	SF	>10,000 To 20,000 SF, Exterior Transite Siding, Asbestos Abatement And Disposal Note: Single or first of multiple layers.	3.42	
02 82 33 00-0226	SF	>20,000 SF, Exterior Transite Siding, Asbestos Abatement And Disposal Note: Single or first of multiple layers.	2.60	

02 82 33 00-0227 Asbestos Contaminated Debris, Asbestos Abatement And Disposal *(02 82 33)*

02 82 33 00-0228 Asbestos Contaminated Dust And Minor Debris Collection In All Areas, Asbestos Abatement And Disposal *(02 82 33 00-0227)*

Note: For non-attic/crawl space surface cleaning including walls, floors, equipment, and furniture.

02 82 33 00-0229	SET	Up To 10 SF, Asbestos Contaminated Dust And Minor Debris Collection In All Areas, Asbestos Abatement And Disposal	641.65
02 82 33 00-0230	SF	>10 To 100 SF, Asbestos Contaminated Dust And Minor Debris Collection In All Areas, Asbestos Abatement And Disposal	1.18
02 82 33 00-0231	SF	>100 To 500 SF, Asbestos Contaminated Dust And Minor Debris Collection In All Areas, Asbestos Abatement And Disposal	0.78
02 82 33 00-0232	SF	>500 To 1,000 SF, Asbestos Contaminated Dust And Minor Debris Collection In All Areas, Asbestos Abatement And Disposal	0.64
02 82 33 00-0233	SF	>1,000 SF, Asbestos Contaminated Dust And Minor Debris Collection In All Areas, Asbestos Abatement And Disposal	0.55

02 82 33 00-0234 Asbestos Contaminated Bulk Debris And Dust Collection In Attic And Crawl Spaces, Asbestos Abatement And Disposal *(02 82 33 00-0227)*

02 82 33 00-0235	SET	Up To 10 SF, Up To 4" Thick, Asbestos Contaminated Bulk Debris And Dust Collection In Attic And Crawl Spaces, Asbestos Abatement And Disposal	859.20
02 82 33 00-0236	SF	>10 To 100 SF, Up To 4" Thick, Asbestos Contaminated Bulk Debris And Dust Collection In Attic And Crawl Spaces, Asbestos Abatement And Disposal	21.89
		For Batt Insulation Removal, Add	*2.00*
		For Encapsulated Soil, Add	*1.00*
		For Work In Restricted Working Space, Add	*1.00*
02 82 33 00-0237	SF	>100 To 250 SF, Up To 4" Thick, Asbestos Contaminated Bulk Debris And Dust Collection In Attic And Crawl Spaces, Asbestos Abatement And Disposal	14.96
		For Batt Insulation Removal, Add	*2.00*
		For Encapsulated Soil, Add	*1.00*
		For Work In Restricted Working Space, Add	*1.00*
02 82 33 00-0238	SF	>250 To 500 SF, Up To 4" Thick, Asbestos Contaminated Bulk Debris And Dust Collection In Attic And Crawl Spaces, Asbestos Abatement And Disposal	11.22
		For Batt Insulation Removal, Add	*2.00*
		For Encapsulated Soil, Add	*1.00*
		For Work In Restricted Working Space, Add	*1.00*
02 82 33 00-0239	SF	>500 To 2,500 SF, Up To 4" Thick, Asbestos Contaminated Bulk Debris And Dust Collection In Attic And Crawl Spaces, Asbestos Abatement And Disposal	9.09
		For Batt Insulation Removal, Add	*2.00*
		For Encapsulated Soil, Add	*1.00*
		For Work In Restricted Working Space, Add	*1.00*
02 82 33 00-0240	SF	>2,500 To 10,000 SF, Up To 4" Thick, Asbestos Contaminated Bulk Debris And Dust Collection In Attic And Crawl Spaces, Asbestos Abatement And Disposal	8.02
		For Batt Insulation Removal, Add	*2.00*
		For Encapsulated Soil, Add	*1.00*
		For Work In Restricted Working Space, Add	*1.00*
02 82 33 00-0241	SF	>10,000 SF, Up To 4" Thick, Asbestos Contaminated Bulk Debris And Dust Collection In Attic And Crawl Spaces, Asbestos Abatement And Disposal	6.96
		For Batt Insulation Removal, Add	*2.00*
		For Encapsulated Soil, Add	*1.00*
		For Work In Restricted Working Space, Add	*1.00*
02 82 33 00-0242	SET	Up To 10 SF, >4" To 7" Thick, Asbestos Contaminated Bulk Debris And Dust Collection In Attic And Crawl Spaces, Asbestos Abatement And Disposal	1,076.75
02 82 33 00-0243	SF	>10 To 100 SF, >4" To 7" Thick, Asbestos Contaminated Bulk Debris And Dust Collection In Attic And Crawl Spaces, Asbestos Abatement And Disposal	43.38
		For Batt Insulation Removal, Add	*2.00*
		For Encapsulated Soil, Add	*1.00*
		For Work In Restricted Working Space, Add	*1.00*
02 82 33 00-0244	SF	>100 To 250 SF, >4" To 7" Thick, Asbestos Contaminated Bulk Debris And Dust Collection In Attic And Crawl Spaces, Asbestos Abatement And Disposal	29.26
		For Batt Insulation Removal, Add	*2.00*
		For Encapsulated Soil, Add	*1.00*
		For Work In Restricted Working Space, Add	*1.00*
02 82 33 00-0245	SF	>250 To 500 SF, >4" To 7" Thick, Asbestos Contaminated Bulk Debris And Dust Collection In Attic And Crawl Spaces, Asbestos Abatement And Disposal	22.21
		For Batt Insulation Removal, Add	*2.00*
		For Encapsulated Soil, Add	*1.00*
		For Work In Restricted Working Space, Add	*1.00*
02 82 33 00-0246	SF	>500 To 2,500 SF, >4" To 7" Thick, Asbestos Contaminated Bulk Debris And Dust Collection In Attic And Crawl Spaces, Asbestos Abatement And Disposal	17.94
		For Batt Insulation Removal, Add	*2.00*
		For Encapsulated Soil, Add	*1.00*
		For Work In Restricted Working Space, Add	*1.00*
02 82 33 00-0247	SF	>2,500 To 10,000 SF, >4" To 7" Thick, Asbestos Contaminated Bulk Debris And Dust Collection In Attic And Crawl Spaces, Asbestos Abatement And Disposal	15.39
		For Batt Insulation Removal, Add	*2.00*
		For Encapsulated Soil, Add	*1.00*
		For Work In Restricted Working Space, Add	*1.00*

copyright 2026 The Gordian Group, Inc.

CSI	MINOR UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 82 33 00-0248	SF	>10,000 SF, >4" To 7" Thick, Asbestos Contaminated Bulk Debris And Dust Collection In Attic And Crawl Spaces, Asbestos Abatement And Disposal	13.94	
		For Batt Insulation Removal, Add	*2.00*	
		For Encapsulated Soil, Add	*1.00*	
		For Work In Restricted Working Space, Add	*1.00*	
02 82 33 00-0249	SET	Up To 10 SF, >7" To 12" Thick, Asbestos Contaminated Bulk Debris And Dust Collection In Attic And Crawl Spaces, Asbestos Abatement And Disposal	1,297.03	
02 82 33 00-0250	SF	>10 To 100 SF, >7" To 12" Thick, Asbestos Contaminated Bulk Debris And Dust Collection In Attic And Crawl Spaces, Asbestos Abatement And Disposal	86.54	
		For Batt Insulation Removal, Add	*2.00*	
		For Encapsulated Soil, Add	*1.00*	
		For Work In Restricted Working Space, Add	*1.00*	
02 82 33 00-0251	SF	>100 To 250 SF, >7" To 12" Thick, Asbestos Contaminated Bulk Debris And Dust Collection In Attic And Crawl Spaces, Asbestos Abatement And Disposal	58.24	
		For Batt Insulation Removal, Add	*2.00*	
		For Encapsulated Soil, Add	*1.00*	
		For Work In Restricted Working Space, Add	*1.00*	
02 82 33 00-0252	SF	>250 To 500 SF, >7" To 12" Thick, Asbestos Contaminated Bulk Debris And Dust Collection In Attic And Crawl Spaces, Asbestos Abatement And Disposal	44.16	
		For Batt Insulation Removal, Add	*2.00*	
		For Encapsulated Soil, Add	*1.00*	
		For Work In Restricted Working Space, Add	*1.00*	
02 82 33 00-0253	SF	>500 To 2,500 SF, >7" To 12" Thick, Asbestos Contaminated Bulk Debris And Dust Collection In Attic And Crawl Spaces, Asbestos Abatement And Disposal	35.60	
		For Batt Insulation Removal, Add	*2.00*	
		For Encapsulated Soil, Add	*1.00*	
		For Work In Restricted Working Space, Add	*1.00*	
02 82 33 00-0254	SF	>2,500 To 10,000 SF, >7" To 12" Thick, Asbestos Contaminated Bulk Debris And Dust Collection In Attic And Crawl Spaces, Asbestos Abatement And Disposal	30.51	
		For Batt Insulation Removal, Add	*2.00*	
		For Encapsulated Soil, Add	*1.00*	
		For Work In Restricted Working Space, Add	*1.00*	
02 82 33 00-0255	SF	>10,000 SF, >7" To 12" Thick, Asbestos Contaminated Bulk Debris And Dust Collection In Attic And Crawl Spaces, Asbestos Abatement And Disposal	27.62	
		For Batt Insulation Removal, Add	*2.00*	
		For Encapsulated Soil, Add	*1.00*	
		For Work In Restricted Working Space, Add	*1.00*	
02 82 33 00-0256		**Asbestos Contaminated Debris, Asbestos Abatement And Disposal** *(02 82 33 00-0227)*		
02 82 33 00-0257	SET	Up To 10 CF, Asbestos Contaminated Debris, Asbestos Abatement And Disposal	870.18	
		For Work In Restricted Working Space, Add	*256.11*	
02 82 33 00-0258	CF	>10 To 100 CF, Asbestos Contaminated Debris, Asbestos Abatement And Disposal	86.54	
		For Work In Restricted Working Space, Add	*25.47*	
02 82 33 00-0259	CF	>100 To 250 CF, Asbestos Contaminated Debris, Asbestos Abatement And Disposal	58.24	
		For Work In Restricted Working Space, Add	*16.98*	
02 82 33 00-0260	CF	>250 To 500 CF, Asbestos Contaminated Debris, Asbestos Abatement And Disposal	44.16	
		For Work In Restricted Working Space, Add	*12.75*	
02 82 33 00-0261	CF	>500 To 2,500 CF, Asbestos Contaminated Debris, Asbestos Abatement And Disposal	35.60	
		For Work In Restricted Working Space, Add	*10.19*	
02 82 33 00-0262	CF	>2,500 To 10,000 CF, Asbestos Contaminated Debris, Asbestos Abatement And Disposal	30.51	
		For Work In Restricted Working Space, Add	*8.66*	
02 82 33 00-0263	CF	>10,000 CF, Asbestos Contaminated Debris, Asbestos Abatement And Disposal	27.62	
		For Work In Restricted Working Space, Add	*7.79*	
02 82 33 00-0264		**Other Asbestos Containing Materials, Asbestos Abatement And Disposal** *(02 82 33)*		
02 82 33 00-0265		**30" To 36" Fire Door, Asbestos Abatement And Disposal** *(02 82 33 00-0264)*		
02 82 33 00-0266	SET	Up To 1 EA, 30" To 36" Fire Door, Asbestos Abatement And Disposal	434.26	
02 82 33 00-0267	EA	>1 To 20 EA, 30" To 36" Fire Door, Asbestos Abatement And Disposal	161.08	
02 82 33 00-0268	EA	>20 EA, 30" To 36" Fire Door, Asbestos Abatement And Disposal	145.71	
02 82 33 00-0269		**HVAC Duct Flexible Connector (Web Cloth), Asbestos Abatement And Disposal** *(02 82 33 00-0264)*		
02 82 33 00-0270	SET	Up To 10 LF, HVAC Duct Flexible Connector (Web Cloth), Asbestos Abatement And Disposal	427.19	
02 82 33 00-0271	LF	>10 To 50 LF, HVAC Duct Flexible Connector (Web Cloth), Asbestos Abatement And Disposal	8.76	
02 82 33 00-0272	LF	>50 To 100 LF, HVAC Duct Flexible Connector (Web Cloth), Asbestos Abatement And Disposal	6.58	
02 82 33 00-0273	LF	>100 To 250 LF, HVAC Duct Flexible Connector (Web Cloth), Asbestos Abatement And Disposal	5.66	
02 82 33 00-0274	LF	>250 To 1,000 LF, HVAC Duct Flexible Connector (Web Cloth), Asbestos Abatement And Disposal	4.87	
02 82 33 00-0275	LF	>1,000 To 2,500 LF, HVAC Duct Flexible Connector (Web Cloth), Asbestos Abatement And Disposal	4.18	
02 82 33 00-0276	LF	>2,500 LF, HVAC Duct Flexible Connector (Web Cloth), Asbestos Abatement And Disposal	3.61	
02 82 33 00-0277		**Grout, Asbestos Abatement And Disposal** *(02 82 33 00-0264)* Note: e.g. flue grout.		
02 82 33 00-0278	SET	Up To 10 LF, Grout, Asbestos Abatement And Disposal	427.08	
02 82 33 00-0279	LF	>10 To 50 LF, Grout, Asbestos Abatement And Disposal	16.83	
02 82 33 00-0280	LF	>50 To 100 LF, Grout, Asbestos Abatement And Disposal	11.59	
02 82 33 00-0281	LF	>100 To 250 LF, Grout, Asbestos Abatement And Disposal	9.93	
02 82 33 00-0282	LF	>250 To 1,000 LF, Grout, Asbestos Abatement And Disposal	8.53	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 82 33 00-0283	LF	>1,000 To 2,500 LF, Grout, Asbestos Abatement And Disposal	7.35	
02 82 33 00-0284	LF	>2,500 LF, Grout, Asbestos Abatement And Disposal	6.31	
02 82 33 00-0285		Gaskets, Asbestos Abatement And Disposal *(02 82 33 00-0264)*		
		Note: e.g. rope, web cloth, flat.		
02 82 33 00-0286	SET	Up To 10 LF, Gaskets, Asbestos Abatement And Disposal	427.19	
02 82 33 00-0287	LF	>10 To 50 LF, Gaskets, Asbestos Abatement And Disposal	22.67	
02 82 33 00-0288	LF	>50 To 250 LF, Gaskets, Asbestos Abatement And Disposal	17.01	
02 82 33 00-0289	LF	>250 To 500 LF, Gaskets, Asbestos Abatement And Disposal	14.49	
02 82 33 00-0290	LF	>500 To 1,500 LF, Gaskets, Asbestos Abatement And Disposal	13.05	
02 82 33 00-0291	LF	>1,500 To 2,500 LF, Gaskets, Asbestos Abatement And Disposal	11.73	
02 82 33 00-0292	LF	>2,500 LF, Gaskets, Asbestos Abatement And Disposal	11.16	
02 82 33 00-0293		Ceiling Tile Including Glue Removal, Asbestos Abatement And Disposal *(02 82 33 00-0264)*		
		Note: e.g. grid, spline, or glued on.		
02 82 33 00-0294	SET	Up To 50 SF, Ceiling Tile, Asbestos Abatement And Disposal	860.57	
		Note: Including Glue Removal		
02 82 33 00-0295	SF	>50 To 1,000 SF, Ceiling Tile, Asbestos Abatement And Disposal	18.28	
		Note: Including Glue Removal		
02 82 33 00-0296	SF	>1,000 To 2,500 SF, Ceiling Tile, Asbestos Abatement And Disposal	8.87	
		Note: Including Glue Removal		
02 82 33 00-0297	SF	>2,500 To 10,000 SF, Ceiling Tile, Asbestos Abatement And Disposal	6.04	
		Note: Including Glue Removal		
02 82 33 00-0298	SF	>10,000 SF, Ceiling Tile, Asbestos Abatement And Disposal	5.15	
		Note: Including Glue Removal		
02 82 33 00-0299		Nailed-On Ceiling Tile System With Asbestos Barrier Paper Backing, Asbestos Abatement And Disposal *(02 82 33 00-0264)*		
		Note: Includes ceiling tile, asbestos barrier paper, and furring strips.		
02 82 33 00-0300	SET	Up To 50 SF, Nailed-On Ceiling Tile System With Asbestos Barrier Paper Backing, Asbestos Abatement And Disposal	857.41	
02 82 33 00-0301	SF	>50 To 1,000 SF, Nailed-On Ceiling Tile System With Asbestos Barrier Paper Backing, Asbestos Abatement And Disposal	18.28	
02 82 33 00-0302	SF	>1,000 To 2,500 SF, Nailed-On Ceiling Tile System With Asbestos Barrier Paper Backing, Asbestos Abatement And Disposal	8.87	
02 82 33 00-0303	SF	>2,500 To 10,000 SF, Nailed-On Ceiling Tile System With Asbestos Barrier Paper Backing, Asbestos Abatement And Disposal	6.04	
02 82 33 00-0304	SF	>10,000 SF, Nailed-On Ceiling Tile System With Asbestos Barrier Paper Backing, Asbestos Abatement And Disposal	5.15	
02 82 33 00-0305		Caulking, Asbestos Abatement And Disposal *(02 82 33 00-0264)*		
02 82 33 00-0306		Non-Friable Caulking, Asbestos Abatement And Disposal *(02 82 33 00-0305)*		
02 82 33 00-0307	SET	Up To 10 LF, Non-Friable Asbestos Contaminated Caulking, Asbestos Abatement And Disposal	427.08	
02 82 33 00-0308	LF	>10 To 50 LF, Non-Friable Asbestos Contaminated Caulking, Asbestos Abatement And Disposal	12.61	
02 82 33 00-0309	LF	>50 To 100 LF, Non-Friable Asbestos Contaminated Caulking, Asbestos Abatement And Disposal	8.90	
02 82 33 00-0310	LF	>100 To 250 LF, Non-Friable Asbestos Contaminated Caulking, Asbestos Abatement And Disposal	6.63	
02 82 33 00-0311	LF	>250 To 1,000 LF, Non-Friable Asbestos Contaminated Caulking, Asbestos Abatement And Disposal	4.98	
02 82 33 00-0312	LF	>1,000 To 2,500 LF, Non-Friable Asbestos Contaminated Caulking, Asbestos Abatement And Disposal	3.95	
02 82 33 00-0313	LF	>2,500 LF, Non-Friable Asbestos Contaminated Caulking, Asbestos Abatement And Disposal	3.43	
02 82 33 00-0314		Wood Wall Joint Compound, Asbestos Abatement And Disposal *(02 82 33 00-0264)*		
02 82 33 00-0315	SET	Up To 10 SF, Wood Wall Joint Compound, Asbestos Abatement And Disposal	854.40	
02 82 33 00-0316	SF	>10 To 500 SF, Wood Wall Joint Compound, Asbestos Abatement And Disposal	16.88	
02 82 33 00-0317	SF	>500 To 2,500 SF, Wood Wall Joint Compound, Asbestos Abatement And Disposal	12.34	
02 82 33 00-0318	SF	>2,500 To 10,000 SF, Wood Wall Joint Compound, Asbestos Abatement And Disposal	9.67	
02 82 33 00-0319	SF	>10,000 SF, Wood Wall Joint Compound, Asbestos Abatement And Disposal	7.54	
02 82 33 00-0320		Chalk Board Mastic, Asbestos Abatement And Disposal *(02 82 33 00-0264)*		
02 82 33 00-0321	SET	Up To 100 SF, Chalk Board Mastic, Asbestos Abatement And Disposal	433.72	
02 82 33 00-0322	SF	>100 To 1,000 SF, Chalk Board Mastic, Asbestos Abatement And Disposal	18.21	
02 82 33 00-0323	SF	>1,000 To 2,500 SF, Chalk Board Mastic, Asbestos Abatement And Disposal	8.80	
02 82 33 00-0324	SF	>2,500 To 10,000 SF, Chalk Board Mastic, Asbestos Abatement And Disposal	5.97	
02 82 33 00-0325	SF	>10,000 SF, Chalk Board Mastic, Asbestos Abatement And Disposal	5.08	
02 82 33 00-0326		Tack Board Mastic, Asbestos Abatement And Disposal *(02 82 33 00-0264)*		
02 82 33 00-0327	SET	Up To 100 SF, Tack Board Mastic, Asbestos Abatement And Disposal	433.72	
02 82 33 00-0328	SF	>100 To 1,000 SF, Tack Board Mastic, Asbestos Abatement And Disposal	18.21	
02 82 33 00-0329	SF	>1,000 To 2,500 SF, Tack Board Mastic, Asbestos Abatement And Disposal	8.80	
02 82 33 00-0330	SF	>2,500 To 10,000 SF, Tack Board Mastic, Asbestos Abatement And Disposal	5.97	
02 82 33 00-0331	SF	>10,000 SF, Tack Board Mastic, Asbestos Abatement And Disposal	5.08	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 82 33 00-0332		**Dash Coat Over Wood Walls, Asbestos Abatement And Disposal** *(02 82 33 00-0264)*		
02 82 33 00-0333	SET	Up To 10 SF, Dash Coat Over Wood Walls, Asbestos Abatement And Disposal	854.40	
02 82 33 00-0334	SF	>10 To 500 SF, Dash Coat Over Wood Walls, Asbestos Abatement And Disposal	18.75	
02 82 33 00-0335	SF	>500 To 2,500 SF, Dash Coat Over Wood Walls, Asbestos Abatement And Disposal	13.98	
02 82 33 00-0336	SF	>2,500 To 10,000 SF, Dash Coat Over Wood Walls, Asbestos Abatement And Disposal	10.51	
02 82 33 00-0337	SF	>10,000 SF, Dash Coat Over Wood Walls, Asbestos Abatement And Disposal	7.90	
02 82 33 00-0338		**HEPA Vacuum, Asbestos Abatement And Disposal** *(02 82 33 00-0264)*		
		Note: For adjacent areas.		
02 82 33 00-0339	SF	High Efficiency Particulate Air (HEPA) Vacuum And Cleaning Of Contaminated Area	0.79	
02 82 33 00-0340		**Asbestos Contaminated Paint, Asbestos Abatement And Disposal** *(02 82 33 00-0264)*		
		Note: Exposed surface area, includes associated overspray.		
02 82 33 00-0341	SET	Up To 10 SF, Asbestos Contaminated Paint On Bridges, Asbestos Abatement And Disposal	534.25	
02 82 33 00-0342	SF	>10 To 500 SF, Asbestos Contaminated Paint On Bridges, Asbestos Abatement And Disposal	52.44	
02 82 33 00-0343	SF	>500 To 2,500 SF, Asbestos Contaminated Paint On Bridges, Asbestos Abatement And Disposal	39.34	
02 82 33 00-0344	SF	>2,500 To 10,000 SF, Asbestos Contaminated Paint On Bridges, Asbestos Abatement And Disposal	29.52	
02 82 33 00-0345	SF	>10,000 SF, Asbestos Contaminated Paint On Bridges, Asbestos Abatement And Disposal	22.15	
02 82 33 00-0346		**Tackboards/Chalkboards/Markerboards With Mastic, Asbestos Abatement And Disposal** *(02 82 33 00-0264)*		
02 82 33 00-0347	SF	Tackboards/Chalkboards/Markerboards With Mastic, Asbestos Abatement And Disposal	5.47	
02 82 33 00-0348	SF	Mastic On Walls, Asbestos Abatement And Disposal	21.41	
02 82 33 00-0349		**Other Material, Asbestos Abatement And Disposal** *(02 82 33 00-0264)*		
02 82 33 00-0350	LF	Chemical Countertops, Asbestos Abatement And Disposal	29.01	
02 82 33 00-0351	EA	Chemical Fume Hood, Asbestos Abatement And Disposal	1,640.23	
02 82 33 00-0352		**Wire Insulation, Asbestos Abatement And Disposal** *(02 82 33 00-0264)*		
02 82 33 00-0353		**Wire Insulation, Asbestos Abatement And Disposal** *(02 82 33 00-0352)*		
02 82 33 00-0354	SET	Up To 10 LF, Asbestos Wire Insulation, Asbestos Abatement And Disposal	427.08	
02 82 33 00-0355	LF	>10 To 50 LF, Asbestos Wire Insulation, Asbestos Abatement And Disposal	4.75	
02 82 33 00-0356	LF	>50 To 100 LF, Asbestos Wire Insulation, Asbestos Abatement And Disposal	3.35	
02 82 33 00-0357	LF	>100 To 250 LF, Asbestos Wire Insulation, Asbestos Abatement And Disposal	2.50	
02 82 33 00-0358	LF	>250 To 1,000 LF, Asbestos Wire Insulation, Asbestos Abatement And Disposal	1.87	
02 82 33 00-0359	LF	>1,000 To 2,500 LF, Asbestos Wire Insulation, Asbestos Abatement And Disposal	1.49	
02 82 33 00-0360	LF	>2,500 LF, Asbestos Wire Insulation, Asbestos Abatement And Disposal	1.30	
02 82 33 00-0361		**Window Putty, Asbestos Abatement And Disposal** *(02 82 33 00-0264)*		
02 82 33 00-0362	SET	Up To 10 LF, Window Putty, Asbestos Abatement And Disposal	427.08	
02 82 33 00-0363	LF	>10 To 50 LF, Window Putty, Asbestos Abatement And Disposal	16.83	
02 82 33 00-0364	LF	>50 To 100 LF, Window Putty, Asbestos Abatement And Disposal	11.59	
02 82 33 00-0365	LF	>100 To 250 LF, Window Putty, Asbestos Abatement And Disposal	9.93	
02 82 33 00-0366	LF	>250 To 1,000 LF, Window Putty, Asbestos Abatement And Disposal	8.53	
02 82 33 00-0367	LF	>1,000 LF, Window Putty, Asbestos Abatement And Disposal	7.35	
02 82 33 00-0368		**Asbestos Contaminated Light Fixture, Asbestos Abatement And Disposal** *(02 82 33 00-0264)*		
02 82 33 00-0369	SET	Up To 4 EA, Asbestos Contaminated Light Fixture, Asbestos Abatement And Disposal	885.33	
02 82 33 00-0370	EA	>4 To 40 EA, Asbestos Contaminated Light Fixture, Asbestos Abatement And Disposal	84.31	
02 82 33 00-0371	EA	>40 To 60 EA, Asbestos Contaminated Light Fixture, Asbestos Abatement And Disposal	58.85	
02 82 33 00-0372	EA	>60 To 125 EA, Asbestos Contaminated Light Fixture, Asbestos Abatement And Disposal	46.16	
02 82 33 00-0373	EA	>125 To 625 EA, Asbestos Contaminated Light Fixture, Asbestos Abatement And Disposal	38.48	
02 82 33 00-0374	EA	>625 To 1,500 EA, Asbestos Contaminated Light Fixture, Asbestos Abatement And Disposal	33.88	
02 82 33 00-0375	EA	>1,500 EA, Asbestos Contaminated Light Fixture, Asbestos Abatement And Disposal	31.28	
02 82 33 00-0376		**Bearing Pads, Asbestos Abatement And Disposal** *(02 82 33 00-0264)*		
02 82 33 00-0377	SET	Up To 10 EA, Bearing Pads, Asbestos Abatement And Disposal	427.54	
02 82 33 00-0378	EA	>10 To 20 EA, Bearing Pads, Asbestos Abatement And Disposal	28.35	
02 82 33 00-0379	EA	>20 To 35 EA, Bearing Pads, Asbestos Abatement And Disposal	18.21	
02 82 33 00-0380	EA	>35 To 50 EA, Bearing Pads, Asbestos Abatement And Disposal	16.34	
02 82 33 00-0381	EA	>50 EA, Bearing Pads, Asbestos Abatement And Disposal	14.69	

02 83 Lead Remediation *(02 80)*

See CSI section 01 56 16 00-0043 for temporary stud walls, 01 74 19 00-0039 for hauling in excess of 25 miles to transfer or disposal site, 02 89 00 00-0008 for plastic sheeting for containment construction, 02 89 00 00-0015 for decontamination chambers.

02 83 19 Lead-Based Paint Remediation *(02 83)*

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

02 83 19 13 Lead-Based Paint Abatement *(02 83 19)*

Note: Includes materials, equipment, mobilization, preparation, critical barriers (e.g. electrical outlets, registers, windows, etc.), signage, removal, bagging, cleanup, vacuuming, transportation for up to 25 miles, disposal, personnel health monitoring, negative air, documentation and other associated costs necessary for the complete removal and disposal of lead contaminated materials in accordance with EPA and local regulations. Where types of Lead are listed by quantity, the quantity of the entire project, not a particular work area, is to be used in determining which task applies. See CSI section 01 56 16 00-0043 for temporary stud walls, 01 74 19 00-0039 for hauling in excess of 25 miles to transfer or disposal site, 02 89 00 00-0008 for plastic sheeting.

02 83 19 13-0001 Lead Sampling And Testing *(02 83 19 13)*

Note: Includes packaging of sample for shipping, shipping to testing lab, chain of custody documentation, analysis of sample, lab report, and sample disposal. Excludes sampling time.

02 83 19 13-0002	HR	Certified Lead Sampling Technician For Bulk Sampling Or Air Monitoring	97.21	
02 83 19 13-0003	EA	X-Ray Fluorescence (XRF) Lead Testing Note: Including Technician, 3 Readings Per Surface And Lab Fee	76.86	
02 83 19 13-0004	EA	5 Day Turnaround Toxicity Characteristic Leaching Procedure (TCLP) Lead Test And Lab Fee	73.58	
02 83 19 13-0005	EA	48 Hour Turnaround Toxicity Characteristic Leaching Procedure (TCLP) Lead Test And Lab Fee	111.49	
02 83 19 13-0006	EA	24 Hour Turnaround Toxicity Characteristic Leaching Procedure (TCLP) Lead Test And Lab Fee	156.09	
02 83 19 13-0007	EA	5 Day Turnaround Total Threshold Leaching Concentration (TTLC) Lead Test And Lab Fee	28.99	
02 83 19 13-0008	EA	24 Hour Turnaround Total Threshold Leaching Concentration (TTLC) Lead Test And Lab Fee	44.60	
02 83 19 13-0009	EA	8 Hour Turnaround Total Threshold Leaching Concentration (TTLC) Lead Test And Lab Fee	55.74	
02 83 19 13-0010	EA	5 Day Turnaround Soluble Threshold Limit Concentration (STLC) Lead Test And Lab Fee	73.58	
02 83 19 13-0011	EA	3 Day Turnaround Soluble Threshold Limit Concentration (STLC) Lead Test And Lab Fee	111.49	
02 83 19 13-0012	EA	5 Day Turnaround Lead Wipe Samples And Lab Fee	12.26	
02 83 19 13-0013	EA	24 Hour Turnaround Lead Wipe Samples And Lab Fee	16.72	
02 83 19 13-0014	EA	8 Hour Turnaround Lead Wipe Samples And Lab Fee	24.53	
02 83 19 13-0015	EA	5 Day Turnaround Lead Air Samples And Lab Fee	12.26	
02 83 19 13-0016	EA	24 Hour Turnaround Lead Air Samples And Lab Fee	16.72	
02 83 19 13-0017	EA	8 Hour Turnaround Lead Air Samples And Lab Fee	24.53	
02 83 19 13-0018	EA	5 Day Turnaround Lead Water Test and Lab Fee	44.60	
02 83 19 13-0019	EA	24 Hour Turnaround Lead Water Test and Lab Fee	66.89	
02 83 19 13-0020	EA	8 Hour Turnaround Lead Water Test and Lab Fee	89.19	
02 83 19 13-0021	EA	5 Day Turnaround Lead Paint Chip Test and Lab Fee	46.12	
02 83 19 13-0022	EA	5 Day Turnaround Lead Soil Test and Lab Fee	92.24	

02 83 19 13-0023 Minimum Charge For Lead-Based Paint Remediation *(02 83 19 13)*

02 83 19 13-0024	EA	Minimum Show Up Charge For Lead-Based Paint Remediation Note: For projects where the total lead-based paint remediation charge is less than the minimum charge, use task "Minimum Charge For Lead-Based Paint Remediation" exclusively. Task "Minimum Charge For Lead-Based Paint Remediation" should not be used in conjunction with any other tasks in this section. Includes air sample and personal air monitoring.	1,313.26	

02 83 19 13-0025 Chemical Stripping Of Lead Contaminated Material *(02 83 19 13)*

Note: Per 0.02" (20 mils) application. Manufacture recommended operating temperatures not to be below 50 degrees. Includes heat gun (where required) for follow up, waste handling, packing and all personnel blood work, lab test fees and monitoring. Industrial coatings often contain other hazardous ingredients in addition to or in place of lead. These might include, but are not be limited to, chromium, cadmium and mercury.

02 83 19 13-0026	SF	Balustrades, Chemical Stripping Of Lead Contaminated Material	37.26	
		For 0.025" (25 mil) Application, Add		*2.11*
		For 0.03" (30 mil) Application, Add		*3.33*
02 83 19 13-0027	SF	Balustrades, Ornate, Chemical Stripping Of Lead Contaminated Material	55.26	
		For 0.025" (25 mil) Application, Add		*3.01*
		For 0.03" (30 mil) Application, Add		*4.68*
02 83 19 13-0028	LF	Up To 6" Wide, Wood Trim, Chemical Stripping Of Lead Contaminated Material	16.00	
		For 0.025" (25 mil) Application, Add		*0.95*
		For 0.03" (30 mil) Application, Add		*1.52*
		For 0.125" (125 mil) Application, Add		*8.50*
02 83 19 13-0029	LF	>6" To 12" Wide, Wood Trim, Chemical Stripping Of Lead Contaminated Material	32.67	
		For 0.025" (25 mil) Application, Add		*1.78*
		For 0.03" (30 mil) Application, Add		*2.77*
		For 0.125" (125 mil) Application, Add		*12.67*
02 83 19 13-0030	SF	Cornice, Chemical Stripping Of Lead Contaminated Material	17.39	
		For 0.025" (25 mil) Application, Add		*1.12*
		For 0.03" (30 mil) Application, Add		*1.84*
02 83 19 13-0031	SF	Cornice, Ornate, Chemical Stripping Of Lead Contaminated Material	49.26	
		For 0.025" (25 mil) Application, Add		*2.71*
		For 0.03" (30 mil) Application, Add		*4.23*
02 83 19 13-0032	SF	Brick, Concrete Block, Concrete, Chemical Stripping Of Lead Contaminated Material	10.72	
		For 0.025" (25 mil) Application, Add		*0.74*
		For 0.03" (30 mil) Application, Add		*1.23*
		For 0.125" (125 mil) Application, Add		*8.68*
02 83 19 13-0033	SF	Cabinets, Chemical Stripping Of Lead Contaminated Material	31.15	
		For 0.025" (25 mil) Application, Add		*1.76*
		For 0.03" (30 mil) Application, Add		*2.76*
02 83 19 13-0034	SF	Cabinets, Ornate, Chemical Stripping Of Lead Contaminated Material	39.69	
		For 0.025" (25 mil) Application, Add		*2.18*
		For 0.03" (30 mil) Application, Add		*3.40*
02 83 19 13-0035	SF	Plaster, Stucco and Drywall Surfaces, Chemical Stripping Of Lead Contaminated Material	14.79	
		For 0.025" (25 mil) Application, Add		*0.94*
		For 0.03" (30 mil) Application, Add		*1.53*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 83 19 13-0036	SF	Columns, Chemical Stripping Of Lead Contaminated Material	14.21	
		For 0.025" (25 mil) Application, Add	*0.96*	
		For 0.03" (30 mil) Application, Add	*1.60*	
		For 0.125" (125 mil) Application, Add	*11.05*	
02 83 19 13-0037	SF	Flush Doors, One Side, Chemical Stripping Of Lead Contaminated Material	12.52	
		For 0.025" (25 mil) Application, Add	*0.83*	
		For 0.03" (30 mil) Application, Add	*1.36*	
02 83 19 13-0038	SF	Raised Panel Doors and Decorative Doors, Chemical Stripping Of Lead Contaminated Material	15.39	
		For 0.025" (25 mil) Application, Add	*0.97*	
		For 0.03" (30 mil) Application, Add	*1.58*	
02 83 19 13-0039	SF	Sectional Panel Or Roll-Up Doors, Chemical Stripping Of Lead Contaminated	22.67	
		For 0.025" (25 mil) Application, Add	*1.38*	
		For 0.03" (30 mil) Application, Add	*2.23*	
02 83 19 13-0040	EA	Electrical Devices, Chemical Stripping Of Lead Contaminated Material	64.82	
		For 0.025" (25 mil) Application, Add	*3.64*	
		For 0.03" (30 mil) Application, Add	*5.71*	
02 83 19 13-0041	LF	Door Frames, Chemical Stripping Of Lead Contaminated Material	16.07	
		For 0.025" (25 mil) Application, Add	*1.00*	
		For 0.03" (30 mil) Application, Add	*1.63*	
02 83 19 13-0042	SF	Wood Floors, Chemical Stripping Of Lead Contaminated Material	8.83	
		For 0.025" (25 mil) Application, Add	*0.64*	
		For 0.03" (30 mil) Application, Add	*1.09*	
02 83 19 13-0043	SF	HVAC Grilles, Chemical Stripping Of Lead Contaminated Material	33.29	
		For 0.025" (25 mil) Application, Add	*1.86*	
		For 0.03" (30 mil) Application, Add	*2.92*	
02 83 19 13-0044	SF	HVAC Grilles, Ornate, Chemical Stripping Of Lead Contaminated Material	39.69	
		For 0.025" (25 mil) Application, Add	*2.18*	
		For 0.03" (30 mil) Application, Add	*3.40*	
02 83 19 13-0045	EA	Hinges, Chemical Stripping Of Lead Contaminated Material	20.84	
		For 0.025" (25 mil) Application, Add	*1.34*	
		For 0.03" (30 mil) Application, Add	*2.20*	
02 83 19 13-0046	EA	Up To 6" Diameter Hangers, Chemical Stripping Of Lead Contaminated Material	25.68	
		For 0.025" (25 mil) Application, Add	*1.58*	
		For 0.03" (30 mil) Application, Add	*2.56*	
		For 0.125" (125 mil) Application, Add	*15.42*	
02 83 19 13-0047	LF	Up To 2" Diameter Pipes and Conduit, Chemical Stripping Of Lead Contaminated Material	7.17	
		For 0.025" (25 mil) Application, Add	*0.51*	
		For 0.03" (30 mil) Application, Add	*0.86*	
		For 0.125" (125 mil) Application, Add	*6.29*	
02 83 19 13-0048	LF	>2" To 4" Diameter Pipes and Conduit, Chemical Stripping Of Lead Contaminated Material	11.50	
		For 0.025" (25 mil) Application, Add	*0.73*	
		For 0.03" (30 mil) Application, Add	*1.18*	
		For 0.125" (125 mil) Application, Add	*7.38*	
02 83 19 13-0049	LF	>4" To 8" Diameter Pipes and Conduit, Chemical Stripping Of Lead Contaminated Material	20.59	
		For 0.025" (25 mil) Application, Add	*1.28*	
		For 0.03" (30 mil) Application, Add	*2.08*	
		For 0.125" (125 mil) Application, Add	*12.65*	
02 83 19 13-0050	LF	>8" To 12" Diameter Pipes and Conduit, Chemical Stripping Of Lead Contaminated Material	28.22	
		For 0.025" (25 mil) Application, Add	*1.71*	
		For 0.03" (30 mil) Application, Add	*2.75*	
		For 0.125" (125 mil) Application, Add	*16.06*	
02 83 19 13-0051	LF	>12" To 16" Diameter Pipes and Conduit, Chemical Stripping Of Lead Contaminated Material	50.61	
		For 0.025" (25 mil) Application, Add	*2.98*	
		For 0.03" (30 mil) Application, Add	*4.75*	
		For 0.125" (125 mil) Application, Add	*26.15*	
02 83 19 13-0052	SF	>16" Diameter Pipes, Chemical Stripping Of Lead Contaminated Material, SF Of Surface Area	15.12	
		For 0.025" (25 mil) Application, Add	*0.86*	
		For 0.03" (30 mil) Application, Add	*1.36*	
		For 0.125" (125 mil) Application, Add	*7.02*	
02 83 19 13-0053	EA	Up To 12 SF Radiators, Chemical Stripping Of Lead Contaminated Material	300.72	
		For 0.025" (25 mil) Application, Add	*16.49*	
		For 0.03" (30 mil) Application, Add	*25.64*	
02 83 19 13-0054	SF	Flat And Raised Panel Wood Shutters, Chemical Stripping Of Lead Contaminated Material	21.05	
		For 0.025" (25 mil) Application, Add	*1.62*	
		For 0.03" (30 mil) Application, Add	*2.78*	
02 83 19 13-0055	SF	Louvered Wood Shutters, Chemical Stripping Of Lead Contaminated Material	23.04	
		For 0.025" (25 mil) Application, Add	*1.72*	
		For 0.03" (30 mil) Application, Add	*2.93*	
02 83 19 13-0056	SF	Siding, Chemical Stripping Of Lead Contaminated Material	12.00	
		For 0.025" (25 mil) Application, Add	*0.85*	
		For 0.03" (30 mil) Application, Add	*1.43*	
		For 0.125" (125 mil) Application, Add	*10.50*	
02 83 19 13-0057	SF	Soffit, Chemical Stripping Of Lead Contaminated Material	25.18	
		For 0.025" (25 mil) Application, Add	*1.46*	
		For 0.03" (30 mil) Application, Add	*2.31*	
		For 0.125" (125 mil) Application, Add	*12.30*	
02 83 19 13-0058	SF	Flat Steel Surfaces, Chemical Stripping Of Lead Contaminated Material	11.58	
		For 0.025" (25 mil) Application, Add	*0.78*	
		For 0.03" (30 mil) Application, Add	*1.29*	
		For 0.125" (125 mil) Application, Add	*8.90*	
02 83 19 13-0059	SF	Corrugated Steel, Chemical Stripping Of Lead Contaminated Material	13.15	
		For 0.025" (25 mil) Application, Add	*0.86*	
		For 0.03" (30 mil) Application, Add	*1.41*	
		For 0.125" (125 mil) Application, Add	*9.29*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 83 19 13-0060	SF	Steel Beams and Columns, Chemical Stripping Of Lead Contaminated Material	13.12	
		For 0.025" (25 mil) Application, Add	*0.86*	
		For 0.03" (30 mil) Application, Add	*1.41*	
		For 0.125" (125 mil) Application, Add	*9.28*	
02 83 19 13-0061	SF	Steel Trusses, Chemical Stripping Of Lead Contaminated Material	18.59	
		For 0.025" (25 mil) Application, Add	*1.13*	
		For 0.03" (30 mil) Application, Add	*1.82*	
		For 0.125" (125 mil) Application, Add	*10.65*	
02 83 19 13-0062	SF	Wood Surfaces, Chemical Stripping Of Lead Contaminated Material	13.12	
		For 0.025" (25 mil) Application, Add	*0.86*	
		For 0.03" (30 mil) Application, Add	*1.41*	
		For 0.125" (125 mil) Application, Add	*9.28*	
02 83 19 13-0063	SF	Windows (Sash, Sill, Jambs, Casing Trim), One Side, 1/1 Light, Chemical Stripping Of Lead Contaminated Material	30.22	
		For 0.025" (25 mil) Application, Add	*1.71*	
		For 0.03" (30 mil) Application, Add	*2.69*	
02 83 19 13-0064	SF	Windows (Sash, Sill, Jambs, Muntins, Casing Trim), One Side, 2/2 Light, Chemical Stripping Of Lead Contaminated Material	33.09	
		For 0.025" (25 mil) Application, Add	*1.85*	
		For 0.03" (30 mil) Application, Add	*2.91*	
02 83 19 13-0065	SF	Windows (Sash, Sill, Jambs, Muntins, Casing Trim), One Side, 4/4 Light, Chemical Stripping Of Lead Contaminated Material	35.01	
		For 0.025" (25 mil) Application, Add	*1.95*	
		For 0.03" (30 mil) Application, Add	*3.05*	
02 83 19 13-0066	SF	Windows (Sash, Sill, Jambs, Muntins, Casing Trim), One Side, 6/6 Light, Chemical Stripping Of Lead Contaminated Material	36.96	
		For 0.025" (25 mil) Application, Add	*2.05*	
		For 0.03" (30 mil) Application, Add	*3.20*	
02 83 19 13-0067	SF	Windows (Sash, Sill, Jambs, Muntins, Casing Trim), One Side, 8/8 Light Chemical Stripping Of Lead Contaminated Material	38.88	
		For 0.025" (25 mil) Application, Add	*2.14*	
		For 0.03" (30 mil) Application, Add	*3.34*	
02 83 19 13-0068	SF	Windows (Sash, Sill, Jambs, Muntins, Casing Trim), One Side, 10/10 Light, Chemical Stripping Of Lead Contaminated Material	40.89	
		For 0.025" (25 mil) Application, Add	*2.24*	
		For 0.03" (30 mil) Application, Add	*3.49*	
02 83 19 13-0069	SF	Windows (Sash, Sill, Jambs, Muntins, Casing Trim), One Side, 12/12 light Chemical Stripping Of Lead Contaminated Material	42.77	
		For 0.025" (25 mil) Application, Add	*2.34*	
		For 0.03" (30 mil) Application, Add	*3.63*	
02 83 19 13-0070	SF	Windows (Sash, Sill, Jambs, Muntins, Casing Trim), One Side, 14/14 Light, Chemical Stripping Of Lead Contaminated Material	43.75	
		For 0.025" (25 mil) Application, Add	*2.39*	
		For 0.03" (30 mil) Application, Add	*3.71*	
02 83 19 13-0071	SF	Windows (Sash, Sill, Jambs, Muntins, Casing Trim), One Side, 16/16 Light Chemical Stripping Of Lead Contaminated Material	44.73	
		For 0.025" (25 mil) Application, Add	*2.44*	
		For 0.03" (30 mil) Application, Add	*3.78*	
02 83 19 13-0072	SF	Windows (Sash, Sill, Jambs, Muntins, Casing Trim), One Side, 20/20 Light, Chemical Stripping Of Lead Contaminated Material	45.67	
		For 0.025" (25 mil) Application, Add	*2.48*	
		For 0.03" (30 mil) Application, Add	*3.85*	
02 83 19 13-0073	SF	Metal Stairs, Chemical Stripping Of Lead Contaminated Material	60.34	
		For 0.025" (25 mil) Application, Add	*3.42*	
		For 0.03" (30 mil) Application, Add	*5.38*	
		For 0.125" (125 mil) Application, Add	*27.09*	
02 83 19 13-0074	LF	Metal Single Hand Rail, Chemical Stripping Of Lead Contaminated Material	10.47	
		For 0.025" (25 mil) Application, Add	*0.67*	
		For 0.03" (30 mil) Application, Add	*1.10*	
		For 0.125" (125 mil) Application, Add	*7.12*	
02 83 19 13-0075	SF	Metal Railing And Posts, Chemical Stripping Of Lead Contaminated Material Note: The unit of measure "SF" is measured for 'Length x Height'. Work includes both sides of railing.	30.67	
		For 0.025" (25 mil) Application, Add	*1.83*	
		For 0.03" (30 mil) Application, Add	*2.94*	
		For 0.125" (125 mil) Application, Add	*16.67*	
02 83 19 13-0076	SF	Metal Picket Fence, Chemical Stripping Of Lead Contaminated Material Note: The unit of measure "SF" is measured for 'Length x Height'. Work includes both sides of railing.	33.54	
		For 0.025" (25 mil) Application, Add	*1.93*	
		For 0.03" (30 mil) Application, Add	*3.05*	
		For 0.125" (125 mil) Application, Add	*15.89*	

02 83 19 13-0077 Demolish Lead Contaminated Material *(02 83 19 13)*

Note: Includes waste handling, packing, all personnel blood work, lab test fees and monitoring. Industrial coatings often contain other hazardous ingredients in addition to or in place of lead. These might include, but are not be limited to, chromium, cadmium and mercury.

02 83 19 13-0078	SF	Demolish Ceiling Suspension System, Lead Contaminated Material		2.65
02 83 19 13-0079	SF	Demolish Suspended Ceiling System And Tile, Lead Contaminated Material		1.54
02 83 19 13-0080	SF	Demolish Acoustical Ceiling Tile, Lead Contaminated Material		0.99
02 83 19 13-0081	SF	Demolish Metal Pan Grid System, Lead Contaminated Material		1.53
02 83 19 13-0082	EA	Demolish Ceiling And Recessed Light Fixtures, Lead Contaminated Material		74.02
02 83 19 13-0083	EA	Demolish >2' x 4' Light Fixtures, Lead Contaminated Material		98.20
02 83 19 13-0084	SF	Demolish Non-Load Bearing Partitions Of Plaster Or Stucco, Lath And Studs, Lead Contaminated Material		10.96
02 83 19 13-0085	SF	Demolish Non-Load Bearing Partitions Of Gypsum Board And Studs, Lead Contaminated Material		6.14
02 83 19 13-0086	SF	Demolish Brick, Lead Contaminated Material		4.62

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 83 19 13-0087	SF	Demolish Concrete Block, Lead Contaminated Material		5.95
02 83 19 13-0088	SF	Demolish Tile, Lead Contaminated Material		4.48
02 83 19 13-0089	SF	Demolish Up To 6" Concrete, Lead Contaminated Material		6.74
02 83 19 13-0090	IN	Drilling, Up To 1/2" Diameter In Lead Paint/Asbestos Material Per Inch Of Depth		5.25
02 83 19 13-0091	IN	Drilling, >1/2" To 1" Diameter In Lead Paint/Asbestos Material Per Inch Of Depth		6.99
02 83 19 13-0092	LF	Demolish Wood Balustrades And Railings, Lead Contaminated Material		7.68
02 83 19 13-0093	LF	Demolish Up To 6" Wide Baseboard, Lead Contaminated Material		2.00
02 83 19 13-0094	LF	Demolish >6" To 12" Wide Baseboard, Lead Contaminated Material		2.50
02 83 19 13-0095	LF	Demolish Base Shoe Molding, Lead Contaminated Material		1.63
02 83 19 13-0096	SF	Demolish Concrete, Lead Contaminated Material		15.27
02 83 19 13-0097	LF	Demolish Cabinets, Lead Contaminated Material		35.56
02 83 19 13-0098	SF	Demolish Ceilings, Gypsum Board, Lead Contaminated Material		2.02
02 83 19 13-0099	SF	Demolish Up To 12" Diameter Columns, Lead Contaminated Material		19.71
02 83 19 13-0100	SF	Demolish Cornice, Lead Contaminated Material		2.62
02 83 19 13-0101	EA	Demolish Doors, Lead Contaminated Material		77.16
02 83 19 13-0102	LF	Demolish Door And Window Wood Trim Or Wood Frames, Lead Contaminated Material		2.35
02 83 19 13-0103	EA	Demolish Electrical Devices, Lead Contaminated Material		23.67
02 83 19 13-0104	LF	Demolish Up To 1" Diameter Electrical Conduit, Lead Contaminated Material		3.04
02 83 19 13-0105	LF	Demolish >1" To 2" Diameter Electrical Conduit, Lead Contaminated Material		5.05
02 83 19 13-0106	SF	Demolish Wood Floors, Lead Contaminated Material		3.64
02 83 19 13-0107	SF	Demolish Grilles, Lead Contaminated Material		4.28
02 83 19 13-0108	EA	Demolish Hinges, Lead Contaminated Material		8.61
02 83 19 13-0109	EA	Demolish Up To 6" Diameter Hangers, Lead Contaminated Material		18.49
02 83 19 13-0110	LF	Demolish Up To 2" Diameter Pipes, Lead Contaminated Material		7.58
02 83 19 13-0111	LF	Demolish >2" To 4" Diameter Pipes, Lead Contaminated Material		11.06
02 83 19 13-0112	LF	Demolish >4" To 8" Diameter Pipes, Lead Contaminated Material		16.72
02 83 19 13-0113	LF	Demolish >8" To 12" Diameter Pipes, Lead Contaminated Material		30.83
02 83 19 13-0114	EA	Demolish Radiators, Lead Contaminated Material		133.17
02 83 19 13-0115	EA	Demolish Shutters, Lead Contaminated Material		51.89
02 83 19 13-0116	SF	Demolish Siding, Lead Contaminated Material		2.06
02 83 19 13-0117	SF	Demolish Soffit, Lead Contaminated Material		1.75
02 83 19 13-0118	SF	Demolish Flat Steel Surfaces, Lead Contaminated Material		4.80
02 83 19 13-0119	SF	Demolish Steel Beams, Lead Contaminated Material		5.65
02 83 19 13-0120	SF	Demolish Trusses, Lead Contaminated Material		7.41
02 83 19 13-0121	SF	Demolish Walls, Wood, Lead Contaminated Material		5.48
02 83 19 13-0122	SF	Demolish Windows, Lead Contaminated Material		18.43
02 83 19 13-0123	SF	Demolish Metal Stair, Lead Contaminated Material		8.82
02 83 19 13-0124	LF	Demolish Single Metal Hand Rail, Lead Contaminated Material		6.48
02 83 19 13-0125	LF	Demolish Metal Railing And Posts, Lead Contaminated Material		10.58
02 83 19 13-0126	SF	Demolish Metal Picket Fence, Lead Contaminated Material		2.91
02 83 19 13-0127	SF	Demolish Plywood, Lead Contaminated Material		7.96
02 83 19 13-0128	SF	Demolish Planks (Various Sizes), Lead Contaminated Material		3.89
02 83 19 13-0129	EA	Demolish Metal Brackets Or Other Small Metal Shapes, Lead Contaminated Material		24.31
02 83 19 13-0130	SF	Demolish Ceramic Tile Block, Lead Contaminated Material		5.30
02 83 19 13-0131	LF	Demolish Metal Guard Rails, Lead Contaminated Material		14.58
02 83 19 13-0132	SF	Demolish Up To 100 SF Gypsum Wall Board, Lead Contaminated Material		7.78
02 83 19 13-0133	SF	Demolish >100 To 500 SF Gypsum Wall Board, Lead Contaminated Material		5.59
02 83 19 13-0134	SF	Demolish >500 To 2,500 SF Gypsum Wall Board, Lead Contaminated Material		4.38
02 83 19 13-0135	SF	Demolish >2,500 SF Gypsum Wall Board, Lead Contaminated Material		3.40
02 83 19 13-0136	SF	Demolish Up To 100 SF Plaster/Stucco, Lead Contaminated Material Note: Includes lath on plaster and backing insulation on stucco.		24.31
02 83 19 13-0137	SF	Demolish >100 To 500 SF Plaster/Stucco, Lead Contaminated Material Note: Includes lath on plaster and backing insulation on stucco.		17.28
02 83 19 13-0138	SF	Demolish >500 To 2,500 SF Plaster/Stucco, Lead Contaminated Material Note: Includes lath on plaster and backing insulation on stucco.		12.96
02 83 19 13-0139	SF	Demolish >2,500 To 10,000 SF Plaster/Stucco, Lead Contaminated Material Note: Includes lath on plaster and backing insulation on stucco.		9.72
02 83 19 13-0140	LF	Demolish Roof Metal Trim, Lead Contaminated Material		3.11
02 83 19 13-0141	LF	Demolish Rain Gutters, Lead Contaminated Material		5.34
02 83 19 13-0142	LF	Demolish Downspouts, Lead Contaminated Material		4.38
02 83 19 13-0143	SF	Demolish Corrugated Metal Roofing, Lead Contaminated Material		5.40
02 83 19 13-0144	LF	Demolish Roof Metal Flashing, Lead Contaminated Material		3.11
02 83 19 13-0145	LF	Demolish Fascia Board Up To 12", Lead Contaminated Material		7.78

02 83 19 13-0146 Wet Sanding/Light Scraping Of Lead Contaminated Material *(02 83 19 13)*

Note: Remove loose, flaking lead-based paint to prepare for painting.

02 83 19 13-0147	SF	Wet Sand/Scrape Of Lead Contaminated Material To Prepare For Painting		3.71

02 83 19 13-0148 Lead Abatement Encapsulation *(02 83 19 13)*

Note: Can also be used for asbestos contaminated encapsulation. Spray applied application unless task described otherwise.

02 83 19 13-0149	SF	Balustrades, Lead Abatement Encapsulation		6.75
02 83 19 13-0150	LF	Up To 6" Wide, Baseboard, Lead Abatement Encapsulation		6.67
02 83 19 13-0151	LF	>6" To 12" Wide, Baseboard, Lead Abatement Encapsulation		9.05
02 83 19 13-0152	SF	Brick, Concrete Block, Concrete, Lead Abatement Encapsulation		4.34
02 83 19 13-0153	SF	Ornate Cabinets, Lead Abatement Encapsulation		9.74
02 83 19 13-0154	SF	Simple Design Cabinets, Lead Abatement Encapsulation		7.94
02 83 19 13-0155	SF	Drywall Ceilings, Lead Abatement Encapsulation		2.74
02 83 19 13-0156	SF	Wood Ceilings, Lead Abatement Encapsulation		3.31
02 83 19 13-0157	SF	Acoustical And Popcorn Ceilings, Lead Abatement Encapsulation		3.07

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 83 19 13-0158	SF	Columns, Lead Abatement Encapsulation	5.24	
02 83 19 13-0159	SF	Doors, Lead Abatement Encapsulation	9.98	
02 83 19 13-0160	LF	Up To 2" Electrical Conduit, Lead Abatement Encapsulation	4.40	
02 83 19 13-0161	SF	Picket Fence (Brush), Lead Abatement Encapsulation	3.14	
02 83 19 13-0162	SF	Wood Floors (Roller), Lead Abatement Encapsulation	2.63	
02 83 19 13-0163	SF	Grilles, Vents, Lead Abatement Encapsulation	7.27	
02 83 19 13-0164	LF	Gutters And Downspouts, Lead Abatement Encapsulation	6.75	
02 83 19 13-0165	EA	Hangers, Lead Abatement Encapsulation	57.21	
02 83 19 13-0166	LF	Up To 4" Diameter Pipe (Brush), Lead Abatement Encapsulation	4.09	
02 83 19 13-0167	LF	>4" To 8" Diameter Pipe (Brush), Lead Abatement Encapsulation	5.90	
02 83 19 13-0168	LF	>8" To 12" Diameter Pipe (Brush), Lead Abatement Encapsulation	9.16	
02 83 19 13-0169	LF	>12" To 16" Diameter Pipe (Brush), Lead Abatement Encapsulation	13.53	
02 83 19 13-0170	EA	Radiators, Lead Abatement Encapsulation	148.47	
02 83 19 13-0171	EA	Up To 6' Shutters, Lead Abatement Encapsulation	212.10	
02 83 19 13-0172	SF	Siding, Lead Abatement Encapsulation	3.74	
02 83 19 13-0173	SF	Up To 12" Soffit, Lead Abatement Encapsulation	5.24	
02 83 19 13-0174	SF	Steel, Flat Surfaces And Tanks Up To 12', Lead Abatement Encapsulation	4.34	
02 83 19 13-0175	SF	Steel Beams And Metal Decks, Lead Abatement Encapsulation	5.66	
02 83 19 13-0176	SF	Trusses, Lead Abatement Encapsulation	5.66	
02 83 19 13-0177	SF	Drywall Walls, Lead Abatement Encapsulation	2.43	
02 83 19 13-0178	SF	Wood Walls, Lead Abatement Encapsulation	2.99	
02 83 19 13-0179	EA	Window Without Grille, Lead Abatement Encapsulation	125.83	
02 83 19 13-0180	EA	Window With Grille, Lead Abatement Encapsulation	161.73	
02 83 19 13-0181	LF	Wood Door Frames And Trim, Lead Abatement Encapsulation	3.85	
02 83 19 13-0182	LF	Steel Lintels, Lead Abatement Encapsulation	4.42	

02 83 33 Removal and Disposal of Material Containing Lead *(02 83)*

02 83 33 13 Lead-Based Paint Removal and Disposal *(02 83 33)*

02 83 33 13-0001 Remove Loose Dirt And Debris Containing Lead *(02 83 33 13)*

02 83 33 13-0002	SF	High Efficiency Particulate Air (HEPA) Vacuum And Wet Cleaning Of Lead Contaminated Area With Mild Detergent	0.31	
02 83 33 13-0003	SF	High Efficiency Particulate Air (HEPA) Vacuum And Wet Cleaning Of Lead Contaminated Area With Tri-Sodium Phosphate	0.31	
02 83 33 13-0004	SF	High Efficiency Particulate Air (HEPA) Vacuum And Shampoo Cleaning Of Lead Contaminated Carpeting	1.53	

02 84 Polychlorinated Biphenyl Remediation *(02 80)*

02 84 16 Handling of Lighting Ballasts and Lamps Containing PCBs and Mercury *(02 84)*

02 84 16 00-0001 Removal Of TSCA-Exempt PCB And Non-PCB Ballasts From Demolished Fixtures *(02 84 16)*

Note: Includes removal of TSCA-exempt PCB and Non-PCB ballast from demolished lighting fixture and placing ballast in an approved container for recycling.

02 84 16 00-0002	EA	Removal Of TSCA-Exempt Polychlorinated Biphenyl (PCB) And Non-PCB Ballast From A Demolished Fixture For Recycling	9.04	

02 84 16 00-0003 Recycle TSCA-Exempt PCB And Non-PCB Ballasts *(02 84 16)*

Note: Non-leaking ballasts. Includes containers, shipping costs and recycling fees. Excludes ballast removal.

02 84 16 00-0004	EA	Recycle Non-Polychlorinated Biphenyl (PCB) Ballast Removed From Up To 4' Length Fixtures	3.39	
02 84 16 00-0005	EA	Recycle Non-Polychlorinated Biphenyl (PCB) Ballast Removed From >4' To 8' Length Fixtures	4.32	
02 84 16 00-0006	EA	Recycle TSCA-Exempt Polychlorinated Biphenyl (PCB) Ballast Removed From Up To 4' Length Fixtures	10.21	
02 84 16 00-0007	EA	Recycle TSCA-Exempt Polychlorinated Biphenyl (PCB) Ballast Removed From >4' To 8' Length Fixtures	21.37	

02 84 16 00-0008 Disposal Of Leaking PCB And Non-PCB Ballasts *(02 84 16)*

Note: Disposal at an EPA approved facility. Includes containers, shipping costs and disposal fees. Excludes ballast removal.

02 84 16 00-0009	EA	Dispose Of Leaking Non-Polychlorinated Biphenyl (PCB) Ballast Removed From Up To 4' Length Fixtures	6.18	
02 84 16 00-0010	EA	Dispose Of Leaking Non-Polychlorinated Biphenyl (PCB) Ballast Removed From >4' To 8' Length Fixtures	8.51	
02 84 16 00-0011	EA	Dispose Of Leaking Polychlorinated Biphenyl (PCB) Ballast Removed From Up To 4' Length Fixtures	26.25	
02 84 16 00-0012	EA	Dispose Of Leaking Polychlorinated Biphenyl (PCB) Ballast Removed From >4' To 8' Length Fixtures	50.96	

02 84 33 Removal and Disposal of Polychlorinated Biphenyls *(02 84)*

02 84 33 00-0001 Removal And Disposal Of Polychlorinated Biphenyls Oil Filled Transformers *(02 84 33)*

Note: Includes disposal in approved container, rigging, manifesting, hauling, etc.

02 84 33 00-0002	EA	Removal And Disposal Of Transformers 2.5/3.5 KVA, Non-Polychlorinated Biphenyl (PCB) Note: Includes disposal costs.	3,641.85	
02 84 33 00-0003	EA	Removal And Disposal Of Transformers 20 KVA, Non-Polychlorinated Biphenyl (PCB) Note: Includes disposal costs.	5,723.88	
02 84 33 00-0004	EA	Removal And Disposal Of Switch, Non-Polychlorinated Biphenyl (PCB)	1,567.24	
02 84 33 00-0005	EA	Removal And Disposal Of Transformers 2.5/3.5 KVA, Polychlorinated Biphenyl (PCB) Note: Includes disposal costs.	6,897.21	
02 84 33 00-0006	EA	Removal And Disposal Of Transformers 20 KVA, Polychlorinated Biphenyl (PCB) Note: Includes disposal costs.	10,880.86	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 84 33 00-0007	EA	Removal And Disposal Of Switch, Polychlorinated Biphenyl (PCB)	2,781.26	

02 87 Bio-Hazard Material Remediation *(02 80)*

02 87 13 Mold Remediation *(02 87)*

Note: All unit pricing in this section includes: materials, equipment, mobilization, preparation, removal, cleanup, vacuuming, transportation for up to 25 miles, disposal, monitoring (personnel and air), sampling/testing, fees, documentation and other associated costs necessary for the complete removal and disposal of mold in accordance with EPA, OSHA, IICRC standards and local regulations. Where types of Mold are listed by quantity, the quantity of the entire project, not a particular work area of building, is to be used in determining which tasks apply. For certain types of work, there is a task with a unit of measure of SET for a quantity of less than 100 LF or SF (Up to 25 LF for Mold Abatement pipe insulation), followed by a series of tasks for other quantities. For those tasks the contractor will be paid the first task with a unit of measure of EA, plus an additional task to arrive at the appropriate quantity for the project. See CSI section 01 56 16 00-0043 for temporary stud walls, 01 74 19 00-0039 for hauling in excess of 25 miles to transfer or disposal site, 02 89 00 00-0008 for plastic sheeting for containment construction, 02 89 00 00-0015 for decontamination chambers.

02 87 13 33 Removal and Disposal of Materials with Mold *(02 87 13)*

02 87 13 33-0001 Pipe And Pipe Fittings Insulation, Mold Abatement And Disposal *(02 87 13 33)*
Note: Treat fittings as additional lf of insulation.

02 87 13 33-0002 Pipe Insulation, Mold Abatement And Disposal *(02 87 13 33-0001)*
Note: Diameter is outer size of insulation.

02 87 13 33-0003 Up To 6" Diameter Pipe Insulation, Mold Abatement And Disposal *(02 87 13 33-0002)*
Note: Excludes encased fittings.

02 87 13 33-0004	SET	Up To 20 LF, Up To 6" Diameter Pipe Insulation, Mold Abatement And Disposal	861.95
02 87 13 33-0005	LF	>20 To 250 LF, Up To 6" Diameter Pipe Insulation, Mold Abatement And Disposal	33.42
02 87 13 33-0006	LF	>250 To 500 LF, Up To 6" Diameter Pipe Insulation, Mold Abatement And Disposal	25.17
02 87 13 33-0007	LF	>500 To 2,500 LF, Up To 6" Diameter Pipe Insulation, Mold Abatement And Disposal	18.98
02 87 13 33-0008	LF	>2,500 To 10,000 LF, Up To 6" Diameter Pipe Insulation, Mold Abatement And Disposal	14.33
02 87 13 33-0009	LF	>10,000 LF, Up To 6" Diameter Pipe Insulation, Mold Abatement And Disposal	12.52

02 87 13 33-0010 >6" Diameter Pipe Insulation, Mold Abatement And Disposal *(02 87 13 33-0002)*

02 87 13 33-0011	SET	Up To 20 LF, >6" Diameter Pipe Insulation, Mold Abatement And Disposal	886.65
02 87 13 33-0012	LF	>20 To 250 LF, >6" Diameter Pipe Insulation, Mold Abatement And Disposal	39.61
02 87 13 33-0013	LF	>250 To 500 LF, >6" Diameter Pipe Insulation, Mold Abatement And Disposal	30.12
02 87 13 33-0014	LF	>500 To 2,500 LF, > 6" Diameter Pipe Insulation, Mold Abatement And Disposal	23.00
02 87 13 33-0015	LF	>2,500 To 10,000 LF, >6" Diameter Pipe Insulation, Mold Abatement And Disposal	17.66
02 87 13 33-0016	LF	>10,000 LF, > 6" Diameter Pipe Insulation, Mold Abatement And Disposal	15.58

02 87 13 33-0017 Thermal Insulation, Mold Abatement And Disposal *(02 87 13 33)*

02 87 13 33-0018 Other Thermal Insulation, Up To 3" Thick, Mold Abatement And Disposal *(02 87 13 33-0017)*

02 87 13 33-0019	SET	Up To 50 SF, Up To 3" Thick Thermal Insulation, Mold Abatement And Disposal	874.30
02 87 13 33-0020	SF	>50 To 500 SF, Up To 3" Thick Thermal Insulation, Mold Abatement And Disposal	19.38
02 87 13 33-0021	SF	>500 To 2,500 SF, Up To 3" Thick Thermal Insulation, Mold Abatement And Disposal	14.64
02 87 13 33-0022	SF	>2,500 To 10,000 SF, Up To 3" Thick Other Thermal Insulation, Mold Abatement And Disposal	11.08
02 87 13 33-0023	SF	>10,000 SF, Up To 3" Thick Thermal Insulation, Mold Abatement And Disposal	8.58

02 87 13 33-0024 Surfacing Material, Mold Abatement And Disposal *(02 87 13 33)*
Note: e.g. fireproofing, acoustical plaster, etc.

02 87 13 33-0025 Stucco, Mold Abatement And Disposal *(02 87 13 33-0024)*
Note: Remove surface coat from brown coat or remove entire assembly, including lath.

02 87 13 33-0026	SET	Up To 50 SF, Stucco, Mold Abatement And Disposal	867.44
02 87 13 33-0027	SF	>50 To 500 SF, Stucco, Mold Abatement And Disposal	19.24
02 87 13 33-0028	SF	>500 To 2,500 SF, Stucco, Mold Abatement And Disposal	14.50
02 87 13 33-0029	SF	>2,500 To 10,000 SF, Stucco, Mold Abatement And Disposal	10.94
02 87 13 33-0030	SF	>10,000 SF, Stucco, Mold Abatement And Disposal	8.29

02 87 13 33-0031 Acoustical Plaster, Mold Abatement And Disposal *(02 87 13 33-0024)*
Note: Remove surface coat from brown coat or remove entire assembly, including lath.

02 87 13 33-0032	SET	Up To 50 SF, Acoustical Plaster, Mold Abatement And Disposal	867.44
02 87 13 33-0033	SF	>50 To 500 SF, Acoustical Plaster, Mold Abatement And Disposal	19.24
02 87 13 33-0034	SF	>500 To 2,500 SF, Acoustical Plaster, Mold Abatement And Disposal	14.50
02 87 13 33-0035	SF	>2,500 To 10,000 SF, Acoustical Plaster, Mold Abatement And Disposal	10.94
02 87 13 33-0036	SF	>10,000 SF, Acoustical Plaster, Mold Abatement And Disposal	8.29

02 87 13 33-0037 Gypsum Board, Mold Abatement And Disposal *(02 87 13 33-0024)*

02 87 13 33-0038	SET	Up To 100 SF, Gypsum Board, Mold Abatement And Disposal	881.17
02 87 13 33-0039	SF	>100 To 500 SF, Gypsum Board, Mold Abatement And Disposal	6.41
02 87 13 33-0040	SF	>500 To 2,500 SF, Gypsum Board, Mold Abatement And Disposal	5.07
02 87 13 33-0041	SF	>2,500 To 10,000 SF, Gypsum Board, Mold Abatement And Disposal	4.01
02 87 13 33-0042	SF	>10,000 SF, Gypsum Board, Mold Abatement And Disposal	2.94

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 87 13 33-0043		**Fireproofing, Mold Abatement And Disposal** *(02 87 13 33-0024)*		
		Note: Exposed surface area, includes associated overspray.		
02 87 13 33-0044	SET	Up To 50 SF, Fireproofing, Mold Abatement And Disposal	874.30	
02 87 13 33-0045	SF	>50 To 500 SF, Fireproofing, Mold Abatement And Disposal	26.55	
02 87 13 33-0046	SF	>500 To 2,500 SF, Fireproofing, Mold Abatement And Disposal	20.05	
02 87 13 33-0047	SF	>2,500 To 10,000 SF, Fireproofing, Mold Abatement And Disposal	15.14	
02 87 13 33-0048	SF	>10,000 SF, Fireproofing, Mold Abatement And Disposal	11.46	
02 87 13 33-0049		**Flooring, Mold Abatement And Disposal** *(02 87 13 33)*		
		Note: Includes cove base.		
02 87 13 33-0050		**Floor Tile Or Linoleum, Mold Abatement And Disposal** *(02 87 13 33-0049)*		
02 87 13 33-0051		**Floor Tile Or Linoleum, Mold Abatement And Disposal** *(02 87 13 33-0050)*		
		Note: Single layer or first of multiple layers.		
02 87 13 33-0052	SET	Up To 100 SF, Single Layer Or First Of Multiple Layers, Floor Tile Or Linoleum, Mold Abatement And Disposal	881.17	
02 87 13 33-0053	SF	>100 To 500 SF, Single Layer Or First Of Multiple Layers, Floor Tile Or Linoleum, Mold Abatement And Disposal	6.37	
		For Each Additional Layer, Add	*1.59*	
02 87 13 33-0054	SF	>500 To 2,500 SF, Single Layer Or First Of Multiple Layers, Floor Tile Or Linoleum, Mold Abatement And Disposal	3.56	
		For Each Additional Layer, Add	*0.89*	
02 87 13 33-0055	SF	>2,500 To 10,000 SF, Single Layer Or First Of Multiple Layers, Floor Tile Or Linoleum, Mold Abatement And Disposal	2.05	
		For Each Additional Layer, Add	*0.51*	
02 87 13 33-0056	SF	>10,000 SF, Single Layer Or First Of Multiple Layers, Floor Tile Or Linoleum, Mold Abatement And Disposal	1.58	
		For Each Additional Layer, Add	*0.40*	
02 87 13 33-0057		**Carpet, Mold Abatement And Disposal** *(02 87 13 33-0049)*		
02 87 13 33-0058		**Carpet, Glue Down, Mold Abatement And Disposal** *(02 87 13 33-0057)*		
02 87 13 33-0059	SET	Up To 100 SF, Carpet, Glue Down, Mold Abatement And Disposal	881.17	
02 87 13 33-0060	SF	>100 To 500 SF, Carpet, Glue Down, Mold Abatement And Disposal	5.29	
02 87 13 33-0061	SF	>500 To 2,500 SF, Carpet, Glue Down, Mold Abatement And Disposal	3.31	
02 87 13 33-0062	SF	>2,500 To 10,000 SF, Carpet, Glue Down, Mold Abatement And Disposal	2.21	
02 87 13 33-0063	SF	>10,000 SF, Carpet, Glue Down, Mold Abatement And Disposal	1.70	
02 87 13 33-0064		**Carpet, Padded With Tack Strips, Mold Abatement And Disposal** *(02 87 13 33-0057)*		
02 87 13 33-0065	SET	Up To 100 SF, Carpet And Pad, Mold Abatement And Disposal	881.17	
		Note: Includes tack strips.		
02 87 13 33-0066	SF	>100 To 500 SF, Carpet And Pad, Mold Abatement And Disposal	5.96	
		Note: Includes tack strips.		
02 87 13 33-0067	SF	>500 To 2,500 SF, Carpet And Pad, Mold Abatement And Disposal	4.34	
		Note: Includes tack strips.		
02 87 13 33-0068	SF	>2,500 To 10,000 SF, Carpet And Pad, Mold Abatement And Disposal	3.43	
		Note: Includes tack strips.		
02 87 13 33-0069	SF	>10,000 SF, Carpet And Pad, Mold Abatement And Disposal	2.64	
		Note: Includes tack strips.		
02 87 13 33-0070		**Subflooring, Mold Abatement And Disposal** *(02 87 13 33-0049)*		
02 87 13 33-0071	SET	Up To 75 SF, Subflooring, Mold Abatement And Disposal	874.30	
02 87 13 33-0072	SF	>75 To 500 SF, Subflooring, Mold Abatement And Disposal	7.34	
02 87 13 33-0073	SF	>500 To 2,500 SF, Subflooring, Mold Abatement And Disposal	4.69	
02 87 13 33-0074	SF	>2,500 To 10,000 SF, Subflooring, Mold Abatement And Disposal	2.82	
02 87 13 33-0075	SF	>10,000 SF, Subflooring, Mold Abatement And Disposal	1.79	
02 87 13 33-0076		**Siding, Mold Abatement And Disposal** *(02 87 13 33)*		
02 87 13 33-0077		**Interior Paneling, Mold Abatement And Disposal** *(02 87 13 33-0076)*		
		Note: Includes detachment of mounted objects before removal.		
02 87 13 33-0078	SET	Up To 100 SF, Interior Paneling, Mold Abatement And Disposal	881.17	
		Note: Includes detachment of mounted objects before removal.		
02 87 13 33-0079	SF	>100 To 500 SF, Interior Paneling, Mold Abatement And Disposal	6.35	
		Note: Includes detachment of mounted objects before removal.		
02 87 13 33-0080	SF	>500 To 2,500 SF, Interior Paneling, Mold Abatement And Disposal	4.45	
		Note: Includes detachment of mounted objects before removal.		
02 87 13 33-0081	SF	>2,500 To 10,000 SF, Interior Paneling, Mold Abatement And Disposal	2.59	
		Note: Includes detachment of mounted objects before removal.		
02 87 13 33-0082	SF	>10,000 SF, Interior Paneling, Mold Abatement And Disposal	1.97	
		Note: Includes detachment of mounted objects before removal.		
02 87 13 33-0083		**Exterior Siding, Mold Abatement And Disposal** *(02 87 13 33-0076)*		
02 87 13 33-0084	SET	Up To 100 SF, Exterior Siding Board, Mold Abatement And Disposal	881.17	
02 87 13 33-0085	SF	>100 To 500 SF, Exterior Siding Board, Mold Abatement And Disposal	7.89	
02 87 13 33-0086	SF	>500 To 2,500 SF, Exterior Siding Board, Mold Abatement And Disposal	5.47	
02 87 13 33-0087	SF	>2,500 To 10,000 SF, Exterior Siding Board, Mold Abatement And Disposal	3.69	
02 87 13 33-0088	SF	>10,000 SF, Exterior Siding Board, Mold Abatement And Disposal	3.31	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 87 13 33-0089		Contaminated Debris, Mold Abatement And Disposal *(02 87 13 33)*		
02 87 13 33-0090		Contaminated Debris, Mold Abatement And Disposal *(02 87 13 33-0089)*		
02 87 13 33-0091	SET	Up To 20 CF, Contaminated Debris, Mold Abatement And Disposal	886.65	
02 87 13 33-0092	CF	>20 To 100 CF, Contaminated Debris, Mold Abatement And Disposal	31.17	
02 87 13 33-0093	CF	>100 To 250 CF, Contaminated Debris, Mold Abatement And Disposal	21.33	
02 87 13 33-0094	CF	>250 To 500 CF, Contaminated Debris, Mold Abatement And Disposal	16.41	
02 87 13 33-0095	CF	>500 To 2,500 CF, Contaminated Debris, Mold Abatement And Disposal	13.46	
02 87 13 33-0096	CF	>2,500 To 10,000 CF, Contaminated Debris, Mold Abatement And Disposal	8.10	
02 87 13 33-0097	CF	>10,000 CF, Contaminated Debris, Mold Abatement And Disposal	7.45	
02 87 13 33-0098		Other Mold Containing Materials, Mold Abatement And Disposal *(02 87 13 33)*		
02 87 13 33-0099		Wood Studs, Mold Abatement And Disposal *(02 87 13 33-0098)*		
		Note: 2" x 4" or 2" x 6" exposed studs in walls. Excludes surfacing material.		
02 87 13 33-0100	SET	Up To 100 LF, Wood Studs, Mold Abatement And Disposal	440.57	
02 87 13 33-0101	LF	>100 To 500 LF, Wood Studs, Mold Abatement And Disposal	3.58	
02 87 13 33-0102	LF	>500 To 2,500 LF, Wood Studs, Mold Abatement And Disposal	2.66	
02 87 13 33-0103	LF	>2,500 To 10,000 LF, Wood Studs, Mold Abatement And Disposal	2.08	
02 87 13 33-0104	LF	>10,000 LF, Wood Studs, Mold Abatement And Disposal	1.57	
02 87 13 33-0105		Ceiling Tile, Mold Abatement And Disposal *(02 87 13 33-0098)*		
		Note: e.g. grid, spline, or glued on; 12" x 12" to 2' x 4'.		
02 87 13 33-0106	SET	Up To 100 SF, Ceiling Tile, Mold Abatement And Disposal	881.17	
02 87 13 33-0107	SF	>100 To 1,000 SF, Ceiling Tile, Mold Abatement And Disposal	10.94	
02 87 13 33-0108	SF	>1,000 To 2,500 SF, Ceiling Tile, Mold Abatement And Disposal	5.13	
02 87 13 33-0109	SF	>2,500 To 10,000 SF, Ceiling Tile, Mold Abatement And Disposal	3.69	
02 87 13 33-0110	SF	>10,000 To 25,000 SF, Ceiling Tile, Mold Abatement And Disposal	3.63	
02 87 13 33-0111	SF	>25,000 To 50,000 SF, Ceiling Tile, Mold Abatement And Disposal	3.56	
02 87 13 33-0112	SF	>50,000 To 100,000 SF, Ceiling Tile, Mold Abatement And Disposal	3.11	
02 87 13 33-0113	SF	>100,000 SF, Ceiling Tile, Mold Abatement And Disposal	2.71	
02 87 13 33-0114		Caulking, Mold Abatement And Disposal *(02 87 13 33-0098)*		
02 87 13 33-0115	SET	Up To 20 LF, Caulking, Mold Abatement And Disposal	213.88	
02 87 13 33-0116	LF	>20 To 50 LF, Caulking, Mold Abatement And Disposal	4.29	
02 87 13 33-0117	LF	>50 To 100 LF, Caulking, Mold Abatement And Disposal	3.06	
02 87 13 33-0118	LF	>100 To 250 LF, Caulking, Mold Abatement And Disposal	2.33	
02 87 13 33-0119	LF	>250 To 1,000 LF, Caulking, Mold Abatement And Disposal	1.72	
02 87 13 33-0120	LF	>1,000 To 2,500 LF, Caulking, Mold Abatement And Disposal	1.39	
02 87 13 33-0121	LF	>2,500 LF, Caulking, Mold Abatement And Disposal	1.20	
02 87 13 33-0122		Wipe Down Walls, Ceilings And Floors *(02 87 13 33-0098)*		
02 87 13 33-0123	CSF	Wipe Down Floors With Mild Bleach Solution	23.72	
		For >25 To 50, Deduct	*-2.37*	
		For >50 To 200, Deduct	*-5.93*	
		For >200, Deduct	*-9.48*	
02 87 13 33-0124	CSF	Wipe Down Walls With Mild Bleach Solution	27.91	
		For >25 To 50, Deduct	*-2.79*	
		For >50 To 200, Deduct	*-6.98*	
		For >200, Deduct	*-11.16*	
02 87 13 33-0125	CSF	Wipe Down Ceilings With Mild Bleach Solution	31.75	
		For >25 To 50, Deduct	*-3.17*	
		For >50 To 200, Deduct	*-7.94*	
		For >200, Deduct	*-12.70*	
02 87 13 33-0126	CSF	Wipe Down Countertops With Mild Bleach Solution	25.88	
		For >25 To 50, Deduct	*-2.59*	
02 87 13 33-0127	CSF	Wipe Down Other Surfaces With Mild Bleach Solution	32.84	
		For >25 To 50, Deduct	*-3.28*	
		For >50 To 200, Deduct	*-8.21*	
		For >200, Deduct	*-13.13*	
02 87 13 33-0128		Cabinets *(02 87 13 33-0098)*		
02 87 13 33-0129	SET	Up To 10 LF, Base Cabinet, Mold Abatement And Disposal	926.70	
02 87 13 33-0130	LF	>10 To 20 LF, Base Cabinet, Mold Abatement And Disposal	97.84	
02 87 13 33-0131	LF	>20 LF, Base Cabinet, Mold Abatement And Disposal	71.97	
02 87 13 33-0132	SET	Up To 10 LF, Wall Cabinet, Mold Abatement And Disposal	877.29	
02 87 13 33-0133	LF	>10 To 20 LF, Wall Cabinet, Mold Abatement And Disposal	82.55	
02 87 13 33-0134	LF	>20 LF, Wall Cabinet, Mold Abatement And Disposal	56.68	

02 87 16 Excrement Removal *(02 87)*

Note: Includes materials, equipment, mobilization, preparation, critical barriers (e.g. electrical outlets, registers, windows, etc.), signage, removal, cleanup, vacuuming, disposal, personnel health monitoring, documentation and other associated costs necessary for the complete removal and disposal of the contaminated material in accordance with EPA and local regulations. The quantity of the entire project, not a particular work area, is to be used in determining which tasks apply. There is a task

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

with a unit of measure of EA for a quantity of less than 10 SF, followed by a series of tasks for additional quantities. For those tasks, the contractor will be paid the first task with a unit of measure of EA, plus each additional task in sequence to arrive at the total quantity for the entire project, not a particular work area.

02 87 16 13 Bird Excrement Removal *(02 87 16)*

02 87 16 13-0001 Bird Waste Removal *(02 87 16 13)*

Note: In addition to items listed the Bio-Hazard Material Remediation note above, includes wetting agents and disinfection of contaminated surfaces.

02 87 16 13-0002	EA	Up To 10 SF Bird Waste Removal, Up To 3" Thickness	853.71	
		For Work In Restricted Working Space, Add	*256.11*	
02 87 16 13-0003	SF	>10 To 500 SF Bird Waste Removal, Up To 3" Thickness	14.23	
		For Work In Restricted Working Space, Add	*4.27*	
02 87 16 13-0004	SF	>500 To 2,500 SF Bird Waste Removal, Up To 3" Thickness	12.93	
		For Work In Restricted Working Space, Add	*3.88*	
02 87 16 13-0005	SF	>2,500 To 10,000 SF Bird Waste Removal, Up To 3" Thickness	11.76	
		For Work In Restricted Working Space, Add	*3.53*	
02 87 16 13-0006	SF	>10,000 SF Bird Waste Removal, Up To 3" Thickness	10.69	
		For Work In Restricted Working Space, Add	*3.21*	

02 87 19 Bio-Hazard and Infectious Disease Control Remediation *(02 87)*

02 87 19 00-0001 Barriers For Bio-Hazard And Infectious Disease Control *(02 87 19)*

02 87 19 00-0002 Adjustable Barrier Panel System For Bio-Hazard And Infectious Disease Control *(02 87 19 00-0001)*

Note: Panels are opal or transparent. Includes self-leveling floor channel, 1/4" foam gasket to conform to ceiling, edge gaskets, grid clips, and cam locks.

02 87 19 00-0003	EA	4' Wide x 7'-8" To 10' High, Fire Rated Containment Panel Assembly (Edge Guard 4000)	726.31
02 87 19 00-0004	EA	3' Wide x 7'-8" To 10' High, Fire Rated Containment Panel Assembly (Edge Guard 4001)	690.00
02 87 19 00-0005	EA	2' Wide x 7'-8" To 10' High, Fire Rated Containment Panel Assembly (Edge Guard 4002)	544.74
02 87 19 00-0006	EA	2' Wide x 7'-8" To 10' High With High Efficiency Particulate Air (HEPA) Filtered Air Discharge Port, Fire Rated Containment Panel Assembly (Edge Guard 4002.1)	629.47
02 87 19 00-0007	EA	4' Wide x 7'-8" To 10' High, Fire Rated Containment Panel Assembly With 44" Door (Edge Guard 4003) Note: Includes a hydraulic closer and a lever style lockset standard.	1,228.67
02 87 19 00-0008	EA	7'-8" To 10' High, Hinged Corner Assembly (Edge Guard 4004)	251.16
02 87 19 00-0009	EA	6" Wide x 7'-8" To 10' High, Fire Rated Containment Panel Assembly (Edge Guard 4005)	332.89
02 87 19 00-0010	EA	12" Wide x 7'-8" To 10' High, Fire Rated Containment Panel Assembly (Edge Guard 4006)	357.10
02 87 19 00-0011	EA	7'-8" To 10' High, Outside Corner Post (Edge Guard 4007)	208.80
02 87 19 00-0012	EA	4'-4" Wide x 7'-8" To 10' High, Fire Rated Containment Panel Assembly With 48" Door (Edge Guard 4008) Note: Includes a hydraulic closer and a lever style lockset standard.	1,470.77
02 87 19 00-0013	EA	7'-8" To 10' High, "T" Post Corner Assembly (Edge Guard 4009)	208.80
02 87 19 00-0014	EA	3' Wide x 7'-8" To 10' High, Fire Rated Containment Panel Assembly With 32" Door (Edge Guard 4010) Note: Includes a hydraulic closer and a lever style lockset standard.	1,107.62
02 87 19 00-0015	EA	Closure Strips (Edge Guard 3003) Note: To seal panels to existing walls	15.67
02 87 19 00-0016	EA	Digital Differential Pressure Gauge Kit (Edge Guard 3005)	339.69

02 87 19 00-0017 Temporary Sheeting For Bio-Hazard And Infectious Disease Control *(02 87 19 00-0001)*

Note: Includes removal and disposal in approved landfill after use.

02 87 19 00-0018	SF	6 Mil Plastic Sheeting, Applied To Floors, For Bio-Hazard And Infectious Disease Control	0.66
02 87 19 00-0019	SF	6 Mil Plastic Sheeting, Applied To Walls, For Bio-Hazard And Infectious Disease Control	0.88
02 87 19 00-0020	SF	6 Mil Plastic Sheeting, Applied To Ceilings, For Bio-Hazard And Infectious Disease Control	1.18
02 87 19 00-0021	SF	6 Mil Plastic Fire Retardant, Anti-static Sheeting, Applied To Floors, For Bio-Hazard And Infectious Disease Control	0.77
02 87 19 00-0022	SF	6 Mil Plastic Fire Retardant, Anti-static Retardant Sheeting, Applied To Walls, For Bio-Hazard And Infectious Disease Control	0.99
02 87 19 00-0023	SF	6 Mil Plastic Fire Retardant, Anti-static Retardant Sheeting, Applied To Ceilings, For Bio-Hazard And Infectious Disease Control	1.29

02 87 19 00-0024 Temporary Floor Protection For Bio-Hazard And Infectious Disease Control *(02 87 19 00-0001)*

Note: Includes removal after use.

02 87 19 00-0025	SF	1/8" Thick, Masonite Temporary Floor Protection For Bio-Hazard And Infectious Disease Control	2.18
02 87 19 00-0026	SF	1/2" Thick, Plywood Temporary Floor Protection For Bio-Hazard And Infectious Disease Control	2.20
02 87 19 00-0027	SF	3/4" Thick, Plywood Temporary Floor Protection For Bio-Hazard And Infectious Disease Control	2.59

02 87 19 00-0028 Temporary Stud Wall For Bio-Hazard And Infectious Disease Control *(02 87 19 00-0001)*

Note: Includes removal after use.

02 87 19 00-0029	SF	1/2" Gypsum Board On One Side, Temporary Wood Stud Wall For Bio-Hazard And Infectious Disease Control	7.32
02 87 19 00-0030	SF	1/2" Gypsum Board On Both Sides, Temporary Wood Stud Wall For Bio-Hazard And Infectious Disease Control	10.18
02 87 19 00-0031	SF	5/8" Type Fire Rated Gypsum Board On One Side, Temporary Wood Stud Wall For Bio-Hazard And Infectious Disease Control	7.50
02 87 19 00-0032	SF	5/8" Type Fire Rated Gypsum Board On Both Sides, Temporary Wood Stud Wall For Bio-Hazard And Infectious Disease Control	10.55
02 87 19 00-0033	SF	6 Mil, Fire Retardant, Plastic Sheeting On One Side, Temporary Wood Stud Wall For Bio-Hazard And Infectious Disease Control	4.21

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 87 19 00-0034		**Isolation Barriers For Bio-Hazard And Infectious Disease Control** *(02 87 19 00-0001)*		
02 87 19 00-0035	GSF	Tent Construction Utilizing Two Layers Of 6 Mil Fire Rated Plastic Sheeting For Bio-Hazard And Infectious Disease Control Note: Includes support frame of 2x4s or PVC piping (ground SF) to construct stand-alone tents (floor, walls and ceiling) with airlock.	27.21	
02 87 19 00-0036	GSF	Relocate Tent Construction To Different Area	3.40	
02 87 19 00-0037		**Plexiglass Barriers For Bio-Hazard And Infectious Disease Control** *(02 87 19 00-0001)*		
02 87 19 00-0038	SF	3/8" Thick, Clear Acrylic Glazing (Plexiglas) For Bio-Hazard And Infectious Disease Control	23.42	
02 87 19 00-0039	SF	1/2" Thick, Clear Acrylic Glazing (Plexiglas) For Bio-Hazard And Infectious Disease Control	27.41	
02 87 19 00-0040	SF	3/4" Thick, Clear Acrylic Glazing (Plexiglas) For Bio-Hazard And Infectious Disease Control	38.22	
02 87 19 00-0041	PR	Install Pair Of 8" Diameter Glove Iris Port In Barrier For Bio-Hazard And Infectious Disease Control Note: Excludes gloves.	1,576.47	
02 87 19 00-0042	PR	Pair Of 8" Diameter Economy Sleeved Gloves With Clamping Ring For Bio-Hazard And Infectious Disease Control Note: For installation in glove iris port.	564.81	
02 87 19 00-0043	PR	Pair Of 8" Diameter Bellows Type Gloves With Clamping Ring For Bio-Hazard And Infectious Disease Control Note: For installation in glove iris port.	898.55	
02 87 19 00-0044	EA	5-5/16" Diameter, Satin Anodized Aluminum, No-Draft Speak-Thru In Barrier For Bio-Hazard And Infectious Disease Note: Includes gaskets and mounting screws for installation on glass from 1/4" (6 mm) to 1/2" (12 mm) thick. Require a minimum hole diameter of 2-1/4" (57 mm), and will cover holes up to 4-1/4" (108 mm). Recommended hole diameter is 3-1/2" (89 mm).	167.45	
02 87 19 00-0045		**Temporary Portable And Mobile Trailers** *(02 87 19)*		
02 87 19 00-0046		**Trailer Delivery** *(02 87 19 00-0045)*		
02 87 19 00-0047	EA	Deliver Trailer Within 25 Miles	1,341.37	
02 87 19 00-0048		**Portable And Mobile Trailers, Purchase** *(02 87 19 00-0045)* Note: Includes cost to set-up, underpin, tie-downs, HVAC unit, lights, outlets, & phone jacks. Trailers shall have a 12' x 12' office area and 6' x 8' bathroom with sink, mirror, and water closet. Minimum of two pedestrian doors and a tinted/insulated 3' x 4' single hung window per 20 SF of wall area. Excludes connection of utilities.		
02 87 19 00-0049	EA	8' x 24' Mobile Trailer With Toilet, Purchase	13,767.66	
		For Tie-Downs, Add	*136.70*	
02 87 19 00-0050	EA	8' x 32' Mobile Trailer With Toilet, Purchase	19,447.64	
		For Tie-Downs, Add	*136.70*	
02 87 19 00-0051	EA	10' x 36' Mobile Trailer With Toilet, Purchase	27,743.63	
		For Tie-Downs, Add	*136.70*	
02 87 19 00-0052	EA	10' x 44' Mobile Trailer With Toilet, Purchase	34,663.91	
		For Tie-Downs, Add	*136.70*	
02 87 19 00-0053	EA	10' x 50' Mobile Trailer With Toilet, Purchase	39,408.12	
		For Tie-Downs, Add	*136.70*	
02 87 19 00-0054	EA	12' x 50' Mobile Trailer With Toilet, Purchase	41,432.41	
		For Tie-Downs, Add	*136.70*	
02 87 19 00-0055	EA	12' x 60' Mobile Trailer With Toilet, Purchase	46,101.55	
		For Tie-Downs, Add	*136.70*	
02 87 19 00-0056		**Accessories For Portable And Mobile Trailers** *(02 87 19 00-0045)*		
02 87 19 00-0057		**Skirting** *(02 87 19 00-0056)* Note: Includes 2" x 4" wood framing 16" on center.		
02 87 19 00-0058	SF	1'-8" High Vinyl Covered Skirt	5.99	2.44
02 87 19 00-0059	SF	3' High Vinyl Covered Skirt	8.82	4.02
02 87 19 00-0060		**Aluminum Modular Access Ramp** *(02 87 19 00-0056)* Note: Includes picketed guardrails, inside grab rails, legs and hardware.		
02 87 19 00-0061	EA	Up To 35" High, Aluminum Modular Access Ramp	4,033.13	46.69
02 87 19 00-0062		**Aluminum Modular Stairs** *(02 87 19 00-0056)* Note: Excludes earthwork		
02 87 19 00-0063	EA	Aluminum Steps For Mobile Trailers	1,116.14	
02 87 19 00-0064		**Decontamination Chambers For Bio-Hazard And Infectious Disease Control** *(02 87 19)* Note: Includes removal after use.		
02 87 19 00-0065	EA	Portable Personnel Decontamination Wash Facility (3 Stage) For Bio-Hazard And Infectious Disease Control Note: Includes connection to negative air system.	1,100.75	
02 87 19 00-0066	EA	Portable Personnel Decontamination Wash Facility (5 Stage) For Bio-Hazard And Infectious Disease Control Note: Includes connection to negative air system.	1,298.11	
02 87 19 00-0067	EA	Portable Waste Decontamination Unit For Bio-Hazard And Infectious Disease Control Note: Includes connection to negative air system.	677.96	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 87 19 00-0068		**Bio-Hazard And Infectious Disease Control Cleaning, Level 2** *(02 87 19)* Note: Includes worker personal protection equipment suites, gloves and masks. Level 1 Biohazard - Minor bacteria and viruses as well as non-infectious bacteria. Microbes are not known to cause disease in healthy hosts and pose minimal risk to workers and the environment. Level 2 Biohazard - Bacteria and viruses that cause mild disease or are difficult to contract. Microbes are typically indigenous and are associated with diseases of varying severity. They pose moderate risk to workers and the environment. Level 3 Biohazard - Microbes are indigenous or exotic and cause serious or potential lethal diseases through respiratory transmission. Disposal of materials used to wipe down surfaces in approved landfill after use. See CSI section 02 87 19 00-0138 for disposal of material into approved landfill.		
02 87 19 00-0069		**Bio-Hazard And Infectious Disease Control Cleaning Mobilization** *(02 87 19 00-0068)*		
02 87 19 00-0070	EA	Mobilization And Set-Up For Bio-Hazard And Infectious Disease Control Note: Mobilization and set-up minimum for each site location, for levels 1, 2 or 3.	444.47	
02 87 19 00-0071		**Bio-Hazard And Infectious Disease Control Cleaning Of Surfaces** *(02 87 19 00-0068)* Note: Includes electrostatic spraying of surfaces with mild bleach, wet mop/wipe, disinfect and high efficiency particulate air (HEPA) vacuum surfaces		
02 87 19 00-0072	CSF	Cleaning Of Floors For Bio-Hazard And Infectious Disease Control With Mild Bleach Solution	32.95	
		For >25 To 50, Deduct	*-3.29*	
		For >50 To 200, Deduct	*-6.59*	
		For >200, Deduct	*-9.88*	
		For Cleaning Surfaces With Goldshield® GS5, Add	*15.37*	
		For Level 1 Biohazard Cleaning, Deduct	*-6.59*	
		For Level 3 Biohazard Cleaning, Add	*10.87*	
02 87 19 00-0073	CSF	Cleaning Of Walls For Bio-Hazard And Infectious Disease Control With Mild Bleach Solution	38.75	
		For >25 To 50, Deduct	*-3.87*	
		For >50 To 200, Deduct	*-7.75*	
		For >200, Deduct	*-11.62*	
		For Cleaning Surfaces With Goldshield® GS5, Add	*15.37*	
		For Level 1 Biohazard Cleaning, Deduct	*-7.75*	
		For Level 3 Biohazard Cleaning, Add	*12.78*	
02 87 19 00-0074	CSF	Cleaning Of Ceilings For Bio-Hazard And Infectious Disease Control With Mild Bleach Solution	44.08	
		For >25 To 50, Deduct	*-4.41*	
		For >50 To 200, Deduct	*-8.81*	
		For >200, Deduct	*-13.22*	
		For Cleaning Surfaces With Goldshield® GS5, Add	*15.37*	
		For Level 1 Biohazard Cleaning, Deduct	*-8.81*	
		For Level 3 Biohazard Cleaning, Add	*14.54*	
02 87 19 00-0075	CSF	Cleaning Of Countertops For Bio-Hazard And Infectious Disease Control With Mild Bleach Solution	35.94	
		For Cleaning Surfaces With Goldshield® GS5, Add	*15.37*	
		For >5 To 10, Deduct	*-1.80*	
		For >10 To 50, Deduct	*-3.59*	
		For >50, Deduct	*-7.18*	
		For Level 1 Biohazard Cleaning, Deduct	*-7.18*	
		For Level 3 Biohazard Cleaning, Add	*11.85*	
02 87 19 00-0076	CSF	Cleaning Of Other Surfaces For Bio-Hazard And Infectious Disease Control With Mild Bleach Solution	45.61	
		For >25 To 50, Deduct	*-4.56*	
		For >50 To 200, Deduct	*-9.12*	
		For >200, Deduct	*-13.68*	
		For Cleaning Surfaces With Goldshield® GS5, Add	*15.37*	
		For Level 1 Biohazard Cleaning, Deduct	*-9.12*	
		For Level 3 Biohazard Cleaning, Add	*15.04*	
02 87 19 00-0077		**Bio-Hazard And Infectious Disease Control Cleaning Of Equipment And Materials** *(02 87 19 00-0068)* Note: Includes spraying of surfaces with mild bleach, wet mop/wipe and disinfect		
02 87 19 00-0078	EA	Cleaning Of Plumbing Fixture For Bio-Hazard And Infectious Disease Control With Mild Bleach Solution	85.16	
		For Level 1 Biohazard Cleaning, Deduct	*-17.03*	
		For Level 3 Biohazard Cleaning, Add	*28.10*	
		For Cleaning Surfaces With Goldshield® GS5, Add	*7.69*	
02 87 19 00-0079	EA	Cleaning Of Restroom Accessory For Bio-Hazard And Infectious Disease Control With Mild Bleach Solution	39.08	
		For Level 1 Biohazard Cleaning, Deduct	*-7.81*	
		For Level 3 Biohazard Cleaning, Add	*12.89*	
		For Cleaning Surfaces With Goldshield® GS5, Add	*5.12*	
02 87 19 00-0080	EA	Cleaning Of Kitchen Appliance For Bio-Hazard And Infectious Disease Control With Mild Bleach Solution	137.18	
		For Level 1 Biohazard Cleaning, Deduct	*-27.43*	
		For Level 3 Biohazard Cleaning, Add	*45.26*	
		For Cleaning Surfaces With Goldshield® GS5, Add	*7.69*	
02 87 19 00-0081	EA	Cleaning Of Electrical Switch/Receptacle For Bio-Hazard And Infectious Disease Control With Mild Bleach Solution	8.45	
		For Level 1 Biohazard Cleaning, Deduct	*-1.69*	
		For Level 3 Biohazard Cleaning, Add	*2.78*	
		For Cleaning Surfaces With Goldshield® GS5, Add	*1.54*	
02 87 19 00-0082	EA	Cleaning Of WorkStation, Exterior Wipe For Bio-Hazard And Infectious Disease Control With Mild Bleach Solution Cleanup Note: Includes desk, chair, computer, monitor(s), keyboard, mouse, lamp, drawers	126.46	
		For Level 1 Biohazard Cleaning, Deduct	*-25.29*	
		For Level 3 Biohazard Cleaning, Add	*41.73*	
		For Cleaning Surfaces With Goldshield® GS5, Add	*7.69*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 87 19 00-0083	EA	Cleaning Of Knobs, Latches, And Locks For Bio-Hazard And Infectious Disease Control With Mild Bleach Solution Cleanup	13.50	
		For Level 1 Biohazard Cleaning, Deduct	*-2.70*	
		For Level 3 Biohazard Cleaning, Add	*4.45*	
		For Cleaning Surfaces With Goldshield® GS5, Add	*1.54*	

02 87 19 00-0084 Bio-Hazard And Infectious Disease Control Cleaning Of Ductwork *(02 87 19 00-0068)*

02 87 19 00-0085	LF	Up To 2 SF Cross Section, Clean Supply/Return Ductwork For Bio-Hazard And Infectious Disease Control Cleaning	4.97	
		For Level 1 Biohazard Cleaning, Deduct	*-0.99*	
		For Level 3 Biohazard Cleaning, Add	*1.63*	
02 87 19 00-0086	LF	>2 SF To 4 SF Cross Section, Clean Supply/Return Ductwork For Bio-Hazard And Infectious Disease Control Cleaning	6.24	
		For Level 1 Biohazard Cleaning, Deduct	*-1.24*	
		For Level 3 Biohazard Cleaning, Add	*2.04*	
02 87 19 00-0087	LF	>4 SF To 8 SF Cross Section, Clean Supply/Return Ductwork For Bio-Hazard And Infectious Disease Control Cleaning	8.36	
		For Level 1 Biohazard Cleaning, Deduct	*-1.65*	
		For Level 3 Biohazard Cleaning, Add	*2.72*	
02 87 19 00-0088	LF	>8 SF Cross Section, Clean Supply/Return Ductwork For Bio-Hazard And Infectious Disease Control Cleaning	11.82	
		For Level 1 Biohazard Cleaning, Deduct	*-2.31*	
		For Level 3 Biohazard Cleaning, Add	*3.82*	
02 87 19 00-0089	EA	Clean Duct Coil For Bio-Hazard And Infectious Disease Control Cleaning	222.25	
		For Level 1 Biohazard Cleaning, Deduct	*-44.45*	
		For Level 3 Biohazard Cleaning, Add	*73.34*	
02 87 19 00-0090	SF	Clean Duct Dampers And Vane Sets For Bio-Hazard And Infectious Disease Control Cleaning	15.46	
		For Level 1 Biohazard Cleaning, Deduct	*-3.09*	
		For Level 3 Biohazard Cleaning, Add	*5.10*	
02 87 19 00-0091	EA	Clean Fan Coil Unit (FCU) Or Variable Air Volume (VAV) Unit For Bio-Hazard And Infectious Disease Control Cleaning	148.17	
		For Level 1 Biohazard Cleaning, Deduct	*-29.63*	
		For Level 3 Biohazard Cleaning, Add	*48.89*	
02 87 19 00-0092	EA	Clean Air Handling Unit Fan And Coil For Bio-Hazard And Infectious Disease Control Cleaning	444.49	
		For Level 1 Biohazard Cleaning, Deduct	*-88.89*	
		For Level 3 Biohazard Cleaning, Add	*146.68*	
02 87 19 00-0093	EA	Clean Grille/Diffuser/Register For Bio-Hazard And Infectious Disease Control Cleaning Note: Includes removal and reinstallation.	37.06	
		For Level 1 Biohazard Cleaning, Deduct	*-7.41*	
		For Level 3 Biohazard Cleaning, Add	*12.22*	
02 87 19 00-0094	SF	Apply Sporicidin Disinfectant To Ductwork And Surfaces After Cleaning For Bio-Hazard And Infectious Disease Control Cleaning	0.66	
		For Level 1 Biohazard Cleaning, Deduct	*-0.12*	
		For Level 3 Biohazard Cleaning, Add	*0.19*	
02 87 19 00-0095	SF	Apply Goldshield® GS5 Anti-microbial Agent To Ductwork And Surfaces After Cleaning For Bio-Hazard And Infectious Disease Control Cleaning	0.74	
		For Level 1 Biohazard Cleaning, Deduct	*-0.12*	
		For Level 3 Biohazard Cleaning, Add	*0.19*	

02 87 19 00-0096 Bio-Hazard And Infectious Disease Control Equipment Rental *(02 87 19)*

Note: Used in the performance of time and material projects. Not used in conjunction with tasks in the Bio-Hazard And Infectious Control Clean Up sections.

02 87 19 00-0097	DAY	Up To 5,000 CFM Portable Air Scrubber For Bio-Hazard And Infectious Disease Control Cleanup	102.17
02 87 19 00-0098	WK	Up To 5,000 CFM Portable Air Scrubber For Bio-Hazard And Infectious Disease Control Cleanup	435.16
02 87 19 00-0099	MO	Up To 5,000 CFM Portable Air Scrubber For Bio-Hazard And Infectious Disease Control Cleanup	1,218.45
02 87 19 00-0100	DAY	Industrial High Efficiency Particulate Air (HEPA) Vacuum For Bio-Hazard And Infectious Disease Control Cleanup	164.76
02 87 19 00-0101	WK	Industrial High Efficiency Particulate Air (HEPA) Vacuum For Bio-Hazard And Infectious Disease Control Cleanup	453.10
02 87 19 00-0102	MO	Industrial High Efficiency Particulate Air (HEPA) Vacuum For Bio-Hazard And Infectious Disease Control Cleanup	1,235.73
02 87 19 00-0103	DAY	Zip Wall Poles (Per 2 Poles) For Bio-Hazard And Infectious Disease Control Cleanup	35.65
02 87 19 00-0104	WK	Zip Wall Poles (Per 2 Poles) For Bio-Hazard And Infectious Disease Control Cleanup	98.05
02 87 19 00-0105	MO	Zip Wall Poles (Per 2 Poles) For Bio-Hazard And Infectious Disease Control Cleanup	267.40
02 87 19 00-0106	DAY	Up To 2,000 CFM Portable Negative Air Machine With Pre-Filter And High Efficiency Particulate Air (HEPA) Filter For Bio-Hazard And Infectious Disease Control Cleanup	98.30
02 87 19 00-0107	WK	Up To 2,000 CFM Portable Negative Air Machine With Pre-Filter And High Efficiency Particulate Air (HEPA) Filter For Bio-Hazard And Infectious Disease Control Cleanup	403.72
02 87 19 00-0108	MO	Up To 2,000 CFM Portable Negative Air Machine With Pre-Filter And High Efficiency Particulate Air (HEPA) Filter For Bio-Hazard And Infectious Disease Control Cleanup	1,219.93
02 87 19 00-0109	EA	High Efficiency Particulate Air (HEPA) Filter, 99.99% Efficient At 0.3 Micron For Negative Air Machine For Bio-Hazard And Infectious Disease Control Cleanup Note: Required if over 800 hours operation.	124.87
02 87 19 00-0110	DAY	20' x 20' High Peak Frame Tent For Bio-Hazard And Infectious Disease Control Cleanup	351.06
02 87 19 00-0111	WK	20' x 20' High Peak Frame Tent For Bio-Hazard And Infectious Disease Control Cleanup	702.11
02 87 19 00-0112	MO	20' x 20' High Peak Frame Tent For Bio-Hazard And Infectious Disease Control Cleanup	1,404.23
02 87 19 00-0113	DAY	20' x 40' High Peak Frame Tent For Bio-Hazard And Infectious Disease Control Cleanup	468.08
02 87 19 00-0114	WK	20' x 40' High Peak Frame Tent For Bio-Hazard And Infectious Disease Control Cleanup	936.15
02 87 19 00-0115	MO	20' x 40' High Peak Frame Tent For Bio-Hazard And Infectious Disease Control Cleanup	1,872.30
02 87 19 00-0116	DAY	20' x 60' High Peak Frame Tent For Bio-Hazard And Infectious Disease Control Cleanup	1,034.55
02 87 19 00-0117	WK	20' x 60' High Peak Frame Tent For Bio-Hazard And Infectious Disease Control Cleanup	2,069.11
02 87 19 00-0118	MO	20' x 60' High Peak Frame Tent For Bio-Hazard And Infectious Disease Control Cleanup	4,138.22
02 87 19 00-0119	DAY	20' x 80' High Peak Frame Tent For Bio-Hazard And Infectious Disease Control Cleanup	1,379.41
02 87 19 00-0120	WK	20' x 80' High Peak Frame Tent For Bio-Hazard And Infectious Disease Control Cleanup	2,758.81
02 87 19 00-0121	MO	20' x 80' High Peak Frame Tent For Bio-Hazard And Infectious Disease Control Cleanup	5,517.62
02 87 19 00-0122	DAY	20' x 100' High Peak Frame Tent For Bio-Hazard And Infectious Disease Control Cleanup	1,724.26

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 87 19 00-0123	WK	20' x 100' High Peak Frame Tent For Bio-Hazard And Infectious Disease Control Cleanup	3,448.51	
02 87 19 00-0124	MO	20' x 100' High Peak Frame Tent For Bio-Hazard And Infectious Disease Control Cleanup	6,897.03	
02 87 19 00-0125	EA	Set-up 20' x 20' High Peak Frame Tent For Bio-Hazard And Infectious Disease Control Cleanup Note: Includes staking down tent.	136.09	
02 87 19 00-0126	EA	Set-up 20' x 40' High Peak Frame Tent For Bio-Hazard And Infectious Disease Control Cleanup Note: Includes staking down tent.	272.17	
02 87 19 00-0127	EA	Set-up 20' x 60' High Peak Frame Tent For Bio-Hazard And Infectious Disease Control Cleanup Note: Includes staking down tent.	816.52	
02 87 19 00-0128	EA	Set-up 20' x 80' High Peak Frame Tent For Bio-Hazard And Infectious Disease Control Cleanup Note: Includes staking down tent.	1,633.05	
02 87 19 00-0129	EA	Set-up 20' x 100' High Peak Frame Tent For Bio-Hazard And Infectious Disease Control Cleanup Note: Includes staking down tent.	2,721.75	
02 87 19 00-0130	DAY	Portable Dual Sink Wash Station For Bio-Hazard And Infectious Disease Control Cleanup	76.76	
02 87 19 00-0131	WK	Portable Dual Sink Wash Station For Bio-Hazard And Infectious Disease Control Cleanup	211.10	
02 87 19 00-0132	MO	Portable Dual Sink Wash Station For Bio-Hazard And Infectious Disease Control Cleanup	575.73	

02 87 19 00-0133 Bio-Hazard And Infectious Disease Control Hauling By Truck *(02 87 19)*

Note: Includes driver and equipment, ten (10) to fifteen (15) minutes load time, time for travel, dump time and return (roundtrip). The task quantity is the number of miles to the disposal site/transfer station (one-way mileage) using an appropriately sized truck.

02 87 19 00-0134	EA	Hauling With 2-3 CY Pick-up Truck, Van Or Trailer, Up To 15 Miles For Bio-Hazard And Infectious Disease Control Cleanup Note: Each first 15 miles per trip	116.81	
		For Each Additional Mile Over First 15 Miles, Add Per Mile	*1.46*	
02 87 19 00-0135	EA	Hauling With 6 To 8 CY Dump Truck, Up To 15 Miles For Bio-Hazard And Infectious Control Cleanup Note: Each first 15 miles per trip	192.09	
		For Each Additional Mile Over First 15 Miles, Add Per Mile	*2.40*	
02 87 19 00-0136	EA	Hauling With 10 To 12 CY Dump Truck, Up To 15 Miles For Bio-Hazard And Infectious Disease Control Cleanup Note: Each first 15 miles per trip	198.02	
		For Each Additional Mile Over First 15 Miles, Add Per Mile	*2.48*	
02 87 19 00-0137	EA	Hauling With 16' To 20', Box Or Flat Bed Truck, Up To 15 Miles For Bio-Hazard And Infectious Disease Control Cleanup Note: Each first 15 miles per trip	192.02	
		For Each Additional Mile Over First 15 Miles, Add Per Mile	*2.40*	

02 87 19 00-0138 Bio-Hazard And Infectious Disease Control Disposal *(02 87 19)*

Note: Used in the performance of time and material projects. Not used in conjunction with tasks in the Bio-Hazard And Infectious Control Clean Up sections.

02 87 19 00-0139	CY	Bio-Hazard And Infectious Disease Control Landfill Dump Fee	44.47	

02 87 19 00-0140 BLU-MED Response Systems® (BLU-MED) Deployable Medical Facilities™ and Emergency Shelters *(02 87 19)*

Note: Includes delivery and set-up of facility, electrical, lighting and HVAC. Excludes medical equipment.

02 87 19 00-0141	EA	20' x 32.5' Medical Shelter with 1-phase electrical, 60 Hertz (BLU-MED BM-2032.5-MS/1P)	47,927.97	
02 87 19 00-0142	EA	7' x 8' Entry Vestibule (BLU-MED BM-MS-VEST)	4,607.47	
02 87 19 00-0143	EA	Vestibule End Panel with Bump Thru Door (BLU-MED BM-7x8-VEP04)	7,623.52	
02 87 19 00-0144	SF	Sub Flooring For Medical Shelter (AKS-AB846)	7.13	
02 87 19 00-0145	EA	Upgrade To Large Roto-Mold Container, Blue (AK-ULC-5)	2,092.50	
02 87 19 00-0146	EA	Environmental Control Unit-5 Ton, 60 Hertz, Blue (AK-ECU-5T-5)	34,272.46	
02 87 19 00-0147	EA	3' ECU to Generator Pigtail, 60 Hertz (AKS-AC915)	1,194.58	
02 87 19 00-0148	EA	Negative Pressure Isolation (NPI) System (AK-NPIS-5) Note: Including: (1) Germicidal/high efficiency particulate air (HEPA) Filter Unit; (1) Monitor/Alarm with Motorized Damper; (1) Isolation Partition for 20'-Wide Shelter; (1) NPI Accessories Case	53,944.29	
02 87 19 00-0149	EA	6' Step Ladder (AKS-AC595)	325.97	
02 87 19 00-0150	EA	10 Lb. Sledgehammer (AKS-AA268)	98.40	

02 87 19 00-0151 Bio-Hazard And Infectious Disease Time And Material Tasks *(02 87 19)*

Note: Used in the performance of time and material projects. Not used in conjunction with tasks in the Bio-Hazard And Infectious Control Clean Up sections.

02 87 19 00-0152 Bio-Hazard And Infectious Disease Control Labor *(02 87 19 00-0151)*

Note: Used in the performance of time and material projects. Not used in conjunction with tasks in the Bio-Hazard And Infectious Control Clean Up sections.

02 87 19 00-0153	HR	General Laborer For Bio-Hazard And Infectious Disease Control Cleanup	114.35	
02 87 19 00-0154	HR	Skilled Tradesman For Bio-Hazard And Infectious Disease Control Cleanup	169.88	
02 87 19 00-0155	HR	Biohazard Technician For Bio-Hazard And Infectious Disease Control Cleanup	104.85	
02 87 19 00-0156	HR	Biohazard Supervisor For Bio-Hazard And Infectious Disease Control Cleanup	126.00	
02 87 19 00-0157	HR	Project Manager For Bio-Hazard And Infectious Disease Control Cleanup	138.60	

02 87 19 00-0158 Bio-Hazard And Infectious Control Clean Up Personal Protection Equipment *(02 87 19 00-0151)*

Note: Used in the performance of time and material projects. Not used in conjunction with tasks in the Bio-Hazard And Infectious Control Clean Up sections.

02 87 19 00-0159	EA	Tyvek Coveralls For Bio-Hazard And Infectious Control Cleanup Personal Protection Equipment	11.80	
02 87 19 00-0160	EA	Tyvek Coveralls With Hood, Boots, Elastic Wrists And Ankles For Bio-Hazard And Infectious Control Cleanup Personal Protection Equipment	19.08	
02 87 19 00-0161	PR	Polycarbonate Lens Safety Goggles For Bio-Hazard And Infectious Control Cleanup Personal Protection Equipment	12.37	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 87 19 00-0162	EA	Dual Cartridge Half-Mask Respirator For Bio-Hazard And Infectious Control Cleanup Personal Protection Equipment	132.79	
02 87 19 00-0163	EA	Cartridge - Respirator For Bio-Hazard And Infectious Control Cleanup Personal Protection Equipment	41.24	
02 87 19 00-0164	EA	Full Face Respirator For Bio-Hazard And Infectious Control Cleanup Personal Protection Equipment Note: Respirator Connection Type: Bayonet, 4 pt. Full Face Suspension	405.13	
02 87 19 00-0165	EA	14-1/2" Width x 9" Height Polycarbonate Visor Faceshield For Bio-Hazard And Infectious Control Cleanup Personal Protection Equipment Note: Includes basic impact ratchet headgear and faceshield safety system. ANSI Z87.1-2010	55.38	
02 87 19 00-0166	EA	19" Width x 11" Height Polycarbonate Visor Attachment To Hardhat For Bio-Hazard And Infectious Control Cleanup Personal Protection Equipment Note: Includes clear polycarbonate crown and chin guard system for hardhat. The chin guard extends below the chin, the shield extends passed the ear, and the crown extends over the forehead to the front of the hardhat. ANSI Z87.1-2015. Excludes hardhat.	100.61	
02 87 19 00-0167	BOX	Box of 100, 5 Mil, Disposable Latex Gloves For Bio-Hazard And Infectious Control Cleanup Personal Protection Equipment	21.39	
02 87 19 00-0168	EA	Gloves - Rubber (Heavy-Duty) For Bio-Hazard And Infectious Control Cleanup Personal Protection Equipment	18.27	
02 87 19 00-0169	EA	Belt-Mounted, Universal Mask, Powered Air Purifying Respirator (PAPR) System Kit For Bio-Hazard And Infectious Control Cleanup Personal Protection Equipment Note: Kit includes NIOSH Approved with Draeger DHR 7000, C420 Blower, Single-Speed Toggle, Battery - LiSO2 (BA5800/U), C420 Breathing Tube Assembly with 75-Degrees Swivel, Decon Belt Assembly 70" x 2", C420 Airflow Indicator (Afl), Micronel Safety M95 Cartridge (2), Molded Case, Black, CBRN Breathing Tube Assembly	2,707.95	
02 87 19 00-0170		Bio-Hazard And Infectious Disease Control Expendables *(02 87 19 00-0151)* Note: Used in the performance of time and material projects. Not used in conjunction with tasks in the Bio-Hazard And Infectious Control Clean Up sections. See CSI section 01 56 16 00-0001 for temporary sheeting, 01 56 16 00-0043 for temporary walls.		
02 87 19 00-0171	GAL	Bleach For Bio-Hazard And Infectious Disease Control Cleanup	9.20	
02 87 19 00-0172	EA	N95 Masks For Bio-Hazard And Infectious Disease Control Cleanup	4.45	
02 87 19 00-0173	GAL	Disinfectant/Anti-microbial For Bio-Hazard And Infectious Disease Control Cleanup	90.16	
02 87 19 00-0174	GAL	Goldshield® GS5 Anti-microbial Concentrate For Bio-Hazard And Infectious Disease Control Cleanup Note: Mix 1 gallon in 5 gallons of water to produce 6 gallons of ready-to-use product. Use on any surface for bacterial inhibition up to 30 days	368.99	
02 87 19 00-0175	QT	Hand Sanitizer For Bio-Hazard And Infectious Disease Control Cleanup	9.44	
02 87 19 00-0176	EA	Sponges - Dry For Bio-Hazard And Infectious Disease Control Cleanup	5.91	
02 87 19 00-0177	ROL	Tape - Duct, 2" x 50 YD For Bio-Hazard And Infectious Disease Control Cleanup	11.73	
02 87 19 00-0178	EA	UV Mini Light, Handheld For Bio-Hazard And Infectious Disease Control Cleanup	80.62	
02 87 19 00-0179	ROL	Visqueen 1 Mil, 12' x 400', For Bio-Hazard And Infectious Disease Control Cleanup	47.30	
02 87 19 00-0180	LB	Wipes, Terry Cloth 14" x 17" For Bio-Hazard And Infectious Disease Control Cleanup	6.89	
02 87 19 00-0181	EA	Wyp-Alls, Case, 160 Wipes For Bio-Hazard And Infectious Disease Control Cleanup	18.46	
02 87 19 00-0182	ROL	6 Mil, 55 Gallon Trash Bags, 50/Roll For Bio-Hazard And Infectious Disease Control Cleanup	145.60	

02 89 Hazmat Ancillary Tasks and Support *(02 80)*

02 89 00 00-0001		Barriers And Protection *(02 89)* Note: Includes removal and disposal after use.		
02 89 00 00-0002		Isolation Barriers *(02 89 00 00-0001)* See CSI section 01 56 16 00-0043 for temporary stud walls.		
02 89 00 00-0003		Cleaning Surfaces *(02 89 00 00-0001)* Note: Other surfaces outside contamination area but not contaminated by, or part of removal.		
02 89 00 00-0004	SF	Up To 100 SF, Clean Non-Asbestos Surface	2.10	
02 89 00 00-0005	SF	>100 To 500 SF, Clean Non-Asbestos Surface	1.48	
02 89 00 00-0006	SF	>500 To 1,000 SF, Clean Non-Asbestos Surface	0.96	
02 89 00 00-0007	SF	>1,000 SF, Clean Non-Asbestos Surface	0.75	
02 89 00 00-0008		Hazmat Containment Construction Plastic Sheeting *(02 89 00 00-0001)*		
02 89 00 00-0009	SF	6 Mil Plastic Sheeting, Applied To Floors, Hazmat Containment Construction	0.52	
02 89 00 00-0010	SF	6 Mil Plastic Sheeting, Applied To Walls, Hazmat Containment Construction	0.69	
02 89 00 00-0011	SF	6 Mil Plastic Sheeting, Applied To Ceilings, Hazmat Containment Construction	0.91	
02 89 00 00-0012	SF	6 Mil Plastic Fire Retardant, Anti-static Sheeting, Applied To Floors, Hazmat Containment Construction	0.81	
02 89 00 00-0013	SF	6 Mil Plastic Fire Retardant, Anti-static Retardant Sheeting, Applied To Walls, Hazmat Containment Construction	1.03	
02 89 00 00-0014	SF	6 Mil Plastic Fire Retardant, Anti-static Retardant Sheeting, Applied To Ceilings, Hazmat Containment Construction	1.34	
02 89 00 00-0015		Decontamination Chambers *(02 89)* Note: Includes cleaning of contaminated materials, removal after use and disposal of plastic barriers. See CSI section 02 89 00 00-0001 for plastic barrier sheets.		
02 89 00 00-0016	EA	3 Stage Portable Personnel Decontamination Wash Facility Note: Includes connection to negative air system.	1,121.68	
02 89 00 00-0017	EA	5 Stage Portable Personnel Decontamination Wash Facility Note: Includes connection to negative air system.	1,323.27	
02 89 00 00-0018	EA	Portable Waste Decontamination Unit Note: Includes connection to negative air system.	694.71	
		For Dismantling And Relocation To A Different Area, Add	*458.29*	

02 90 Disaster Recovery *(02)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

Note: The tasks in this division are only to be used when specifically requested by the Owner and are not to be combined with tasks from other divisions of this or other Construction Task Catalogs® unless specifically requested by the Owner.

02 90 50 Cleaning and Disaster Cleanup *(02 90)*

02 90 50 00-0001 Non-Mold Contaminated Wet Material Removal *(02 90 50)*

Note: For materials not requiring mold abatement.

02 90 50 00-0002	SY	Wet Broadloom Carpet Removal For Disaster Clean-up	28.21
02 90 50 00-0003	SY	Wet Carpet Tile Removal For Disaster Clean-up	6.86
02 90 50 00-0004	SF	Wet Batt Insulation Removal For Disaster Clean-up	0.57
02 90 50 00-0005	SF	Wet Ceiling Tile Removal For Disaster Clean-up	0.69
02 90 50 00-0006	SF	Single Layer, Wet Gypsum Board Removal For Disaster Clean-up	0.67
02 90 50 00-0007	SF	Double Layer, Wet Gypsum Board Removal For Disaster Clean-up	1.05

02 90 50 00-0008 Cleaning *(02 90 50)*

Note: Use "Light Clean" when soot or dust is barely evident. Use "Medium Clean" when paint color can be seen through the soot or dust. Use "Heavy Clean" when paint color cannot be seen. Includes all man power, equipment and expendables required

02 90 50 00-0009 Clean Furnishings *(02 90 50 00-0008)*

02 90 50 00-0010	EA	Office Equipment, Exterior Wipe For Disaster Clean-up	28.68
		For Medium Clean, Add	*12.05*
		For Heavy Clean, Add	*37.28*
02 90 50 00-0011	SF	Bookcase (Per SF Of Face Area), Light Clean For Disaster Clean-up	1.60
		For Medium Clean, Add	*0.67*
		For Heavy Clean, Add	*2.08*
02 90 50 00-0012	LF	Shelving, Light Clean For Disaster Clean-up	2.87
		For Medium Clean, Add	*1.21*
		For Heavy Clean, Add	*3.73*
02 90 50 00-0013	EA	Plastic Or Metal Chair, Light Clean For Disaster Clean-up	8.28
		For Medium Clean, Add	*3.48*
		For Heavy Clean, Add	*10.76*
02 90 50 00-0014	EA	Upholstered Chair, Light Clean For Disaster Clean-up	26.77
		For Medium Clean, Add	*11.24*
		For Heavy Clean, Add	*34.80*
02 90 50 00-0015	EA	Upholstered Sofa, Light Clean For Disaster Clean-up	165.07
		For Medium Clean, Add	*69.33*
		For Heavy Clean, Add	*214.59*
02 90 50 00-0016	EA	Desk, Light Clean For Disaster Clean-up	33.78
		For Medium Clean, Add	*14.19*
		For Heavy Clean, Add	*43.91*
02 90 50 00-0017	EA	Table, Light Clean For Disaster Clean-up	31.86
		For Medium Clean, Add	*13.38*
		For Heavy Clean, Add	*41.42*
02 90 50 00-0018	EA	Two Drawer File Cabinet, Light Clean For Disaster Clean-up	6.99
		For Medium Clean, Add	*2.94*
		For Heavy Clean, Add	*9.09*
02 90 50 00-0019	EA	Four Drawer File Cabinet, Light Clean For Disaster Clean-up	8.94
		For Medium Clean, Add	*3.75*
		For Heavy Clean, Add	*11.62*
02 90 50 00-0020	LF	Base Cabinet, Exterior Wipe, Light Clean For Disaster Clean-up	7.33
		For Medium Clean, Add	*3.08*
		For Heavy Clean, Add	*9.53*
02 90 50 00-0021	LF	Base Cabinet, Exterior And Interior Wipe, Light Clean For Disaster Clean-up	14.34
		For Medium Clean, Add	*6.02*
		For Heavy Clean, Add	*18.64*
02 90 50 00-0022	LF	Wall Cabinet, Exterior Wipe, Light Clean For Disaster Clean-up	7.33
		For Medium Clean, Add	*3.08*
		For Heavy Clean, Add	*9.53*
02 90 50 00-0023	LF	Wall Cabinet, Exterior And Interior Wipe, Light Clean For Disaster Clean-up	12.75
		For Medium Clean, Add	*5.36*
		For Heavy Clean, Add	*16.58*
02 90 50 00-0024	EA	Picture Frame, Glass And Back, Light Clean For Disaster Clean-up	3.06
		For Medium Clean, Add	*1.29*
		For Heavy Clean, Add	*3.98*

02 90 50 00-0025 Clean Hard Surfaces *(02 90 50 00-0008)*

02 90 50 00-0026	LF	Wood, Vinyl Or Rubber Baseboard, Light Clean For Disaster Clean-up	0.42
		For Medium Clean, Add	*0.18*
		For Heavy Clean, Add	*0.55*
02 90 50 00-0027	EA	Door And Hardware (Per Side), Light Clean For Disaster Clean-up	5.42
		For Medium Clean, Add	*2.28*
		For Heavy Clean, Add	*7.05*
02 90 50 00-0028	EA	Detailed Door And Hardware (Per Side), Light Clean For Disaster Clean-up	6.14
		For Medium Clean, Add	*2.58*
		For Heavy Clean, Add	*7.98*
02 90 50 00-0029	SF	Overhead Door, Light Clean For Disaster Clean-up	0.43
		For Medium Clean, Add	*0.18*
		For Heavy Clean, Add	*0.56*
02 90 50 00-0030	SF	Mirror, Light Clean For Disaster Clean-up	0.32
		For Medium Clean, Add	*0.13*
		For Heavy Clean, Add	*0.42*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 90 50 00-0031	SF	Window, Light Clean For Disaster Clean-up	0.94	
		For Medium Clean, Add	*0.39*	
		For Heavy Clean, Add	*1.22*	
02 90 50 00-0032	LF	Handrail, Light Clean For Disaster Clean-up	0.83	
		For Medium Clean, Add	*0.35*	
		For Heavy Clean, Add	*1.08*	
02 90 50 00-0033	LF	Bumper Rail, Light Clean For Disaster Clean-up	0.45	
		For Medium Clean, Add	*0.19*	
		For Heavy Clean, Add	*0.59*	
02 90 50 00-0034	SF	Hard Floor, Light Clean For Disaster Clean-up	0.37	
		For Medium Clean, Add	*0.16*	
		For Heavy Clean, Add	*0.48*	
02 90 50 00-0035	SF	Carpet, Light Clean For Disaster Clean-up	0.38	
		For Medium Clean, Add	*0.16*	
		For Heavy Clean, Add	*0.49*	
02 90 50 00-0036	SF	Hard Ceiling, Light Clean For Disaster Clean-up	0.29	
		For Medium Clean, Add	*0.12*	
		For Heavy Clean, Add	*0.38*	
02 90 50 00-0037	SF	Suspended Ceiling, Tile And Grid, Light Clean For Disaster Clean-up	0.32	
		For Medium Clean, Add	*0.13*	
		For Heavy Clean, Add	*0.42*	
02 90 50 00-0038	SF	Ceramic Tile Wall, Light Clean For Disaster Clean-up	0.27	
		For Medium Clean, Add	*0.11*	
		For Heavy Clean, Add	*0.35*	
02 90 50 00-0039	SF	Wall, Light Clean For Disaster Clean-up	0.20	
		For Medium Clean, Add	*0.08*	
		For Heavy Clean, Add	*0.26*	
02 90 50 00-0040	SF	Masonry Wall, Light Clean For Disaster Clean-up	0.27	
		For Medium Clean, Add	*0.11*	
		For Heavy Clean, Add	*0.35*	
02 90 50 00-0041	EA	Up To 24 SF Area Rug, Off-Site Cleaning, Light Clean For Disaster Clean-up Note: Includes removal from site, cleaning, and return.	67.21	
		For Medium Clean, Add	*28.23*	
		For Heavy Clean, Add	*87.37*	
02 90 50 00-0042	EA	>24 To 96 SF Area Rug, Off-Site Cleaning, Light Clean For Disaster Clean-up Note: Includes removal from site, cleaning, and return.	84.02	
		For Medium Clean, Add	*35.29*	
		For Heavy Clean, Add	*109.23*	
02 90 50 00-0043	EA	>96 To 140 SF Area Rug, Off-Site Cleaning, Light Clean For Disaster Clean-up Note: Includes removal from site, cleaning, and return.	100.81	
		For Medium Clean, Add	*42.34*	
		For Heavy Clean, Add	*131.05*	
02 90 50 00-0044	EA	>140 To 216 SF Area Rug, Off-Site Cleaning, Light Clean For Disaster Clean-up	117.62	
		For Medium Clean, Add	*49.40*	
		For Heavy Clean, Add	*152.91*	

02 90 50 00-0045 Clean Window Treatments *(02 90 50 00-0008)*

02 90 50 00-0046	SF	Window Blind, Light Clean For Disaster Clean-up	0.73	
		For Medium Clean, Add	*0.31*	
		For Heavy Clean, Add	*0.95*	
02 90 50 00-0047	EA	Up To 6' Long Drapery (Per Pleat), Light Clean For Disaster Clean-up	1.49	
		For Medium Clean, Add	*0.63*	
		For Heavy Clean, Add	*1.94*	
02 90 50 00-0048	EA	Up To 6' Long Lined Drapery (Per Pleat), Light Clean For Disaster Clean-up	1.72	
		For Medium Clean, Add	*0.72*	
		For Heavy Clean, Add	*2.24*	
02 90 50 00-0049	EA	>6' To 8' Drapery (Per Pleat), Light Clean For Disaster Clean-up	1.57	
		For Medium Clean, Add	*0.66*	
		For Heavy Clean, Add	*2.04*	
02 90 50 00-0050	EA	>6' To 8' Lined Drapery (Per Pleat), Light Clean For Disaster Clean-up	1.80	
		For Medium Clean, Add	*0.76*	
		For Heavy Clean, Add	*2.34*	
02 90 50 00-0051	EA	>8' To 10' Drapery (Per Pleat), Light Clean For Disaster Clean-up	1.92	
		For Medium Clean, Add	*0.81*	
		For Heavy Clean, Add	*2.50*	
02 90 50 00-0052	EA	>8' To 10' Lined Drapery (Per Pleat), Light Clean For Disaster Clean-up	2.21	
		For Medium Clean, Add	*0.93*	
		For Heavy Clean, Add	*2.87*	

02 90 50 00-0053 Clean Appliances *(02 90 50 00-0008)*

02 90 50 00-0054	EA	Microwave Oven, Outside, Light Clean For Disaster Clean-up	13.20	
		For Medium Clean, Add	*5.54*	
		For Heavy Clean, Add	*17.16*	
02 90 50 00-0055	EA	Refrigerator, Outside, Light Clean For Disaster Clean-up	31.11	
		For Medium Clean, Add	*13.07*	
		For Heavy Clean, Add	*40.44*	
02 90 50 00-0056	EA	Range, Outside, Light Clean For Disaster Clean-up	26.88	
		For Medium Clean, Add	*11.29*	
		For Heavy Clean, Add	*34.94*	

02 90 50 00-0057 Clean Plumbing *(02 90 50 00-0008)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 90 50 00-0058	EA	Water Heater, Light Clean For Disaster Clean-up	19.12	
		For Medium Clean, Add	*8.03*	
		For Heavy Clean, Add	*24.86*	
02 90 50 00-0059	EA	Plumbing Fixture, Light Clean For Disaster Clean-up	19.31	
		For Medium Clean, Add	*8.11*	
		For Heavy Clean, Add	*25.10*	
02 90 50 00-0060	EA	Restroom Accessory, Light Clean For Disaster Clean-up	8.86	
		For Medium Clean, Add	*3.72*	
		For Heavy Clean, Add	*11.52*	

02 90 50 00-0061 Clean HVAC *(02 90 50 00-0008)*

02 90 50 00-0062	LF	Baseboard Heater, Light Clean For Disaster Clean-up	5.71	
		For Medium Clean, Add	*2.40*	
		For Heavy Clean, Add	*7.42*	
02 90 50 00-0063	LF	Ductwork, Exterior Wipe, Light Clean For Disaster Clean-up	15.94	
		For Medium Clean, Add	*6.69*	
		For Heavy Clean, Add	*20.72*	
02 90 50 00-0064	EA	Ductwork, Interior (Per Grille/Register), Light Clean For Disaster Clean-up	61.19	
		For Medium Clean, Add	*25.70*	
		For Heavy Clean, Add	*79.55*	
02 90 50 00-0065	EA	Grille/Register, Light Clean For Disaster Clean-up	5.73	
		For Medium Clean, Add	*2.41*	
		For Heavy Clean, Add	*7.45*	
02 90 50 00-0066	EA	Air Handling Unit, Exterior Wipe, Light Clean For Disaster Clean-up	39.72	
		For Medium Clean, Add	*16.68*	
		For Heavy Clean, Add	*51.64*	
02 90 50 00-0067	EA	Furnace, Exterior Wipe, Light Clean For Disaster Clean-up	35.37	
		For Medium Clean, Add	*14.86*	
		For Heavy Clean, Add	*45.98*	

02 90 50 00-0068 Clean Electrical *(02 90 50 00-0008)*

02 90 50 00-0069	EA	Electric Fan, Light Clean For Disaster Clean-up	23.58	
		For Medium Clean, Add	*9.90*	
		For Heavy Clean, Add	*30.65*	
02 90 50 00-0070	EA	Ceiling Fan, Light Clean For Disaster Clean-up	25.49	
		For Medium Clean, Add	*10.71*	
		For Heavy Clean, Add	*33.14*	
02 90 50 00-0071	EA	Ceiling Fan And Light, Light Clean For Disaster Clean-up	33.14	
		For Medium Clean, Add	*13.92*	
		For Heavy Clean, Add	*43.08*	
02 90 50 00-0072	EA	Ceiling Exhaust Fan, Light Clean For Disaster Clean-up	23.27	
		For Medium Clean, Add	*9.77*	
		For Heavy Clean, Add	*30.25*	
02 90 50 00-0073	EA	2' x 4' Light Fixture, Light Clean For Disaster Clean-up	15.30	
		For Medium Clean, Add	*6.43*	
		For Heavy Clean, Add	*19.89*	
02 90 50 00-0074	EA	Light Fixture, Light Clean For Disaster Clean-up	7.01	
		For Medium Clean, Add	*2.94*	
		For Heavy Clean, Add	*9.11*	
02 90 50 00-0075	EA	Smoke Detector, Light Clean For Disaster Clean-up	5.42	
		For Medium Clean, Add	*2.28*	
		For Heavy Clean, Add	*7.05*	
02 90 50 00-0076	EA	Thermostat, Light Clean For Disaster Clean-up	1.91	
		For Medium Clean, Add	*0.80*	
		For Heavy Clean, Add	*2.48*	

02 90 50 00-0077 Thermal Fog *(02 90 50 00-0008)*

02 90 50 00-0078	CF	Clean And Deodorize Building With Thermal Fog For Disaster Clean-up	0.02	

02 90 50 00-0079 Contents Manipulation *(02 90 50)*

02 90 50 00-0080	SF	Cover Contents With 6 Mil Plastic Sheeting For Disaster Clean-up	0.25	
02 90 50 00-0081	SF	Floor Protection, Adhesive Film For Disaster Clean-up	0.31	
02 90 50 00-0082	SF	Move Contents Out And Later Reset For Disaster Clean-up	0.50	
02 90 50 00-0083	MO	20' Long Job Site Storage Trailer For Disaster Clean-up	155.80	
02 90 50 00-0084	MO	40' Long Job Site Storage Trailer For Disaster Clean-up	206.62	
02 90 50 00-0085	EA	Delivery Or Pickup Job Site Storage Trailer For Disaster Clean-up	148.24	

02 90 50 00-0086 Water Disaster Clean-up *(02 90 50)*

02 90 50 00-0087	LF	Detach Baseboard For Disaster Clean-up	0.69	
02 90 50 00-0088	LF	Detach And Later Reset Baseboard For Disaster Clean-up	1.23	
02 90 50 00-0089	EA	Block And Pad Furniture (Per Piece Of Furniture) For Disaster Clean-up	4.52	
02 90 50 00-0090	SF	Water Extraction From Floor For Disaster Clean-up	0.47	
02 90 50 00-0091	SF	Gray Water Extraction From Floor For Disaster Clean-up	0.76	
02 90 50 00-0092	SF	Black Water Extraction From Floor For Disaster Clean-up	1.20	
02 90 50 00-0093	SF	Tear Out Wet Non-Salvageable Carpet For Disaster Clean-up	0.37	
02 90 50 00-0094	SF	Tear Out Wet Non-Salvageable Carpet, Black Water For Disaster Clean-up	0.44	
02 90 50 00-0095	SF	Tear Out Wet Non-Salvageable Glue Down Carpet For Disaster Clean-up	0.67	
02 90 50 00-0096	SF	Tear Out Wet Non-Salvageable Glue Down Carpet, Black Water For Disaster Clean-up	0.98	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 90 50 00-0097	SF	Tear Out Vinyl Flooring For Disaster Clean-up	0.93	
02 90 50 00-0098	SF	Tear Out Vinyl Flooring, Black Water For Disaster Clean-up	1.36	
02 90 50 00-0099	SF	Tear Out Wood Flooring, Black Water For Disaster Clean-up	3.51	
02 90 50 00-0100	SF	Tear Out Laminated Wood Flooring For Disaster Clean-up	1.72	
02 90 50 00-0101	SF	Tear Out Laminated Wood Flooring, Black Water For Disaster Clean-up	2.53	
02 90 50 00-0102	SF	Tear Out Wet Ceiling Tile For Disaster Clean-up	0.29	
02 90 50 00-0103	SF	Tear Out Batt Insulation For Disaster Clean-up	0.29	
02 90 50 00-0104	SF	Tear Out Wet Gypsum Board For Disaster Clean-up	0.49	
02 90 50 00-0105	SF	Apply Anti-microbial Agent For Disaster Clean-up	0.29	
02 90 50 00-0106	SF	High Efficiency Particulate Air (HEPA) Vacuuming For Disaster Clean-up	0.36	
02 90 50 00-0107		**Board Up And Tarp Up** *(02 90 50)*		
02 90 50 00-0108	SF	Polyethylene Tarp On Roof For Disaster Clean-up	0.25	
02 90 50 00-0109	SF	1/2" Temporary Plywood On Roof For Disaster Clean-up	1.59	
02 90 50 00-0110	SF	5/8" Temporary Plywood On Roof For Disaster Clean-up	1.81	
02 90 50 00-0111	SF	3/4" Temporary Plywood On Roof For Disaster Clean-up	1.98	
02 90 50 00-0112	SF	1/2" Temporary Plywood On Wall Or Windows For Disaster Clean-up	1.97	
02 90 50 00-0113	SF	5/8" Temporary Plywood On Wall Or Windows For Disaster Clean-up	2.19	
02 90 50 00-0114	SF	3/4" Temporary Plywood On Wall Or Windows For Disaster Clean-up	2.36	
02 90 50 00-0115		**Minimum Charge For Disaster Cleanup** *(02 90 50)*		
02 90 50 00-0116	EA	Minimum Charge For Disaster Cleaning	1,484.45	
02 90 50 00-0117	EA	Minimum Charge For Disaster Water Extraction	286.15	
02 90 50 00-0118	EA	Minimum Charge For Disaster Carpet Cleaning	200.60	
02 90 50 00-0119		**Document Restoration** *(02 90 50)*		
02 90 50 00-0120	EA	Book Rebinding, Each For Document Restoration	103.60	
02 90 50 00-0121	EA	Book Recasing, Each For Document Restoration	51.79	
02 90 50 00-0122	EA	Boxes-MCS, 1.2 CF For Document Restoration	9.65	
02 90 50 00-0123	EA	Boxes-MCS, 2.0 CF For Document Restoration	10.64	
02 90 50 00-0124	EA	Boxes Bankers For Document Restoration	16.55	
02 90 50 00-0125	EA	Boxes Standard Packout For Document Restoration	6.18	
02 90 50 00-0126	EA	Boxes X Ray For Document Restoration	10.36	
02 90 50 00-0127	EA	CD Scanning and Diagnostics, Each For Document Restoration	10.36	
02 90 50 00-0128	EA	Cleaning Antique Books, Each For Document Restoration	310.77	
02 90 50 00-0129	EA	Cleaning Catheter Roll, Per Roll For Document Restoration	41.42	
02 90 50 00-0130	EA	Cleaning CD And DVD, Per Disc For Document Restoration	4.16	
02 90 50 00-0131	EA	Cleaning Level 1 - Blue Prints, Each For Document Restoration	4.31	
02 90 50 00-0132	CF	Cleaning Level 1 - Document Per CF For Document Restoration	133.69	
02 90 50 00-0133	EA	Cleaning Level 1 - Linen, Each For Document Restoration	4.31	
02 90 50 00-0134	EA	Cleaning Level 1 - Mylar, Each For Document Restoration	4.31	
02 90 50 00-0135	EA	Cleaning Level 2 - Blue Print, Each For Document Restoration	5.36	
02 90 50 00-0136	CF	Cleaning Level 2 - Document Per CF For Document Restoration	200.35	
02 90 50 00-0137	EA	Cleaning Level 2 - Linen, Each For Document Restoration	5.36	
02 90 50 00-0138	EA	Cleaning Level 2 - Mylar, Each For Document Restoration	5.36	
02 90 50 00-0139	EA	Cleaning Level 3 - Blue Prints, Each For Document Restoration	7.60	
02 90 50 00-0140	CF	Cleaning Level 3 - Document Per CF For Document Restoration	267.33	
02 90 50 00-0141	EA	Cleaning Level 3 - Linen, Each For Document Restoration	7.60	
02 90 50 00-0142	EA	Cleaning Level 3 - Mylar, Each For Document Restoration	7.60	
02 90 50 00-0143	EA	Cleaning Level 4 - All Fire-Blue Print, Each For Document Restoration	10.66	
02 90 50 00-0144	EA	Cleaning Level 4 - All Fire-Linen, Each For Document Restoration	10.66	
02 90 50 00-0145	EA	Cleaning Level 4 - All Fire-Mylar, Each For Document Restoration	10.66	
02 90 50 00-0146	CF	Cleaning Level 4 - Light Fire-Document Per CF For Document Restoration	334.10	
02 90 50 00-0147	EA	Cleaning Level 5 - Severe Fire-Blue Print, Each For Document Restoration	11.81	
02 90 50 00-0148	CF	Cleaning Level 5 - Severe Fire-Document Per CF For Document Restoration	501.30	
02 90 50 00-0149	EA	Cleaning Level 5 - Severe Fire-Linen, Each For Document Restoration	11.81	
02 90 50 00-0150	EA	Cleaning Level 5 - Severe Fire-Mylar, Each For Document Restoration	11.81	
02 90 50 00-0151	EA	Cleaning Microfiche Sheets, Each For Document Restoration	4.19	
02 90 50 00-0152	EA	Cleaning Microfiche Strips, Each For Document Restoration	0.97	
02 90 50 00-0153	EA	Cleaning Microfilm Rolls (In House), Per Roll For Document Restoration	103.60	
02 90 50 00-0154	EA	Cleaning Microfilm Rolls (Outside), Per Roll For Document Restoration	145.04	
02 90 50 00-0155	EA	Cleaning Photographs Negatives, Per Negative For Document Restoration	4.19	
02 90 50 00-0156	EA	Cleaning Photographs, Each For Document Restoration	0.97	
02 90 50 00-0157	EA	Cleaning Record Albums, Each For Document Restoration	4.16	
02 90 50 00-0158	EA	Cleaning VHS And Beta Tapes-In House, Each For Document Restoration	10.36	
02 90 50 00-0159	EA	Cleaning VHS And Beta Tapes-Outside, Each For Document Restoration	41.42	
02 90 50 00-0160	EA	Cleaning X Ray 1-1000, Per Film For Document Restoration	5.72	
02 90 50 00-0161	EA	Cleaning X Ray 1K-5K, Per Film For Document Restoration	4.89	
02 90 50 00-0162	EA	Cleaning X Ray 5K-Up, Per Film For Document Restoration	3.83	
02 90 50 00-0163	EA	Copying Clean Water, Per Page For Document Restoration	0.56	
02 90 50 00-0164	EA	Copying Greywater Fire, Per Page For Document Restoration	1.12	
02 90 50 00-0165	CF	Deodorization, Vapor Tech For Document Restoration	7.21	
02 90 50 00-0166	CF	Disinfectant-Fogging For Document Restoration	14.53	
02 90 50 00-0167	EA	Document Disposal In House No Shredding For Document Restoration	56.04	
02 90 50 00-0168	EA	Document Disposal In House With Shredding For Document Restoration	15.29	
02 90 50 00-0169	CF	Up To 150 CF, Drying-MCS Center For Document Restoration	186.46	
02 90 50 00-0170	CF	>150 To 500 CF, Drying-MCS Center For Document Restoration	145.04	
02 90 50 00-0171	CF	>500 CF, Drying-MCS Center For Document Restoration	124.31	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 90 50 00-0172	CF	>50 To 150 CF, Drying-MCS Center For Document Restoration	165.75	
02 90 50 00-0173	CF	Up To 500 CF, Drying-Onsite For Document Restoration	310.77	
02 90 50 00-0174	CF	>500 CF, Drying-Onsite For Document Restoration	190.64	
02 90 50 00-0175	EA	Drying Antique Books, Each For Document Restoration	41.42	
02 90 50 00-0176	EA	Drying Blue Prints, Each For Document Restoration	5.18	
02 90 50 00-0177	EA	DVD Scanning And Diagnostics, Each For Document Restoration	10.36	
02 90 50 00-0178	EA	Freeze Drying (In House) For Document Restoration	139.01	
02 90 50 00-0179	EA	Freeze Drying (Outside) For Document Restoration	119.15	
02 90 50 00-0180	EA	Minimum Charge For Up To 48 CF, Irradiation - Gamma For Document Restoration	3,276.74	
02 90 50 00-0181	CF	>48 CF, Irradiation - Gamma (Per CF Charge) For Document Restoration	29.79	
02 90 50 00-0182	EA	Minimal Drying Jobs For Document Restoration	1,380.20	
02 90 50 00-0183	EA	Monthly Storage For Document Restoration	230.76	
02 90 50 00-0184	EA	Mylar Prints For Document Restoration	10.36	
02 90 50 00-0185	CF	Ozoning For Document Restoration	6.48	
02 90 50 00-0186	CF	Stabilization Freezer Storage, Per Cubic Foot Per Month For Document Restoration	11.99	
02 90 50 00-0187	MO	Stabilization Freezer Storage, Per Page-Per Month For Document Restoration	0.10	
02 90 50 00-0188	EA	Wood Pallets, Each For Document Restoration	33.34	

02 90 55 Emergency Clean-up *(02 90)*

02 90 55 00-0001 Emergency Clean-up *(02 90 55)*

Note: Used in the performance of time and material projects. Not used in conjunction with tasks in the Cleaning, Contents Manipulation, and Water Emergency Cleanup sections.

02 90 55 00-0002 Emergency Clean-up Labor *(02 90 55 00-0001)*

Note: Used in the performance of time and material projects. Labor costs are based on workers familiar with and skilled in the performance of the task following restoration requirements. Not to be used in conjunction with tasks in the Cleaning, Contents Manipulation, and Water Emergency Cleanup sections.

02 90 55 00-0003	HR	Skilled Tradesman For Emergency Cleanup	62.88	
02 90 55 00-0004	HR	Restoration / Document Laborer For Emergency Cleanup	44.00	
02 90 55 00-0005	HR	Restoration / Document Supervisor For Emergency Cleanup	60.50	
02 90 55 00-0006	HR	Restoration / Document Project Manager For Emergency Cleanup	99.00	
02 90 55 00-0007	HR	Assistant Project Manager For Emergency Cleanup	82.50	
02 90 55 00-0008	HR	Senior Project Manager For Emergency Cleanup	115.50	
02 90 55 00-0009	HR	Project Director / Document Consultant / Account Manager For Emergency Cleanup	165.00	
02 90 55 00-0010	HR	Equipment Technician For Emergency Cleanup	121.00	
02 90 55 00-0011	HR	Mold Remediation Laborer For Emergency Cleanup	60.25	
02 90 55 00-0012	HR	Mold Remediation Supervisor For Emergency Cleanup	82.50	
02 90 55 00-0013	HR	Administrative Personnel For Emergency Cleanup	38.50	
02 90 55 00-0014	HR	Project Accountant For Emergency Cleanup	62.88	
02 90 55 00-0015	HR	Biohazard Technician For Emergency Cleanup	87.38	
02 90 55 00-0016	HR	Biohazard Supervisor For Emergency Cleanup	105.00	
02 90 55 00-0017	HR	Health And Safety Officer For Emergency Cleanup	94.25	
02 90 55 00-0018	HR	Resource And Logistics Coordinator For Emergency Cleanup	68.12	
02 90 55 00-0019	HR	Loss Control Specialist For Emergency Cleanup	66.00	
02 90 55 00-0020	HR	Moisture Control Specialist For Emergency Cleanup	54.50	
02 90 55 00-0021	HR	Mobilzation Support For Emergency Cleanup	33.50	

02 90 55 00-0022 Emergency Clean-up Equipment *(02 90 55 00-0001)*

Note: Used in the performance of time and material projects. Not used in conjunction with tasks in the Cleaning, Contents Manipulation, and Water Emergency Cleanup sections.

02 90 55 00-0023 General Emergency Clean-up Equipment *(02 90 55 00-0022)*

02 90 55 00-0024	DAY	265 CFM Portable Ozone Machine, 12,000 MG/HR For Emergency Clean-up	102.17	
02 90 55 00-0025	WK	265 CFM Portable Ozone Machine, 12,000 MG/HR For Emergency Clean-up	389.75	
02 90 55 00-0026	MO	265 CFM Portable Ozone Machine, 12,000 MG/HR For Emergency Clean-up	1,067.09	
02 90 55 00-0027	DAY	13" Floor Buffer Rental For Emergency Clean-up	39.93	
02 90 55 00-0028	WK	13" Floor Buffer Rental For Emergency Clean-up	90.01	
02 90 55 00-0029	MO	13" Floor Buffer Rental For Emergency Clean-up	248.47	
02 90 55 00-0030	DAY	17" Floor Buffer Rental For Emergency Clean-up	62.12	
02 90 55 00-0031	WK	17" Floor Buffer Rental For Emergency Clean-up	158.46	
02 90 55 00-0032	MO	17" Floor Buffer Rental For Emergency Clean-up	373.97	
02 90 55 00-0033	DAY	Walk Behind Floor Scrubber Rental For Emergency Clean-up	342.28	
02 90 55 00-0034	WK	Walk Behind Floor Scrubber Rental For Emergency Clean-up	919.08	
02 90 55 00-0035	MO	Walk Behind Floor Scrubber Rental For Emergency Clean-up	2,560.75	
02 90 55 00-0036	DAY	Ride-On Floor Scrubber Rental For Emergency Clean-up	773.30	
02 90 55 00-0037	WK	Ride-On Floor Scrubber Rental For Emergency Clean-up	2,041.00	
02 90 55 00-0038	MO	Ride-On Floor Scrubber Rental For Emergency Clean-up	5,501.82	
02 90 55 00-0039	DAY	4 Gallon, Commercial Carpet Extractor Rental For Emergency Clean-up	73.55	
02 90 55 00-0040	WK	4 Gallon, Commercial Carpet Extractor Rental For Emergency Clean-up	208.96	
02 90 55 00-0041	MO	4 Gallon, Commercial Carpet Extractor Rental For Emergency Clean-up	718.83	
02 90 55 00-0042	DAY	8 Gallon, Commercial Carpet Extractor Rental For Emergency Clean-up	68.54	
02 90 55 00-0043	WK	8 Gallon, Commercial Carpet Extractor Rental For Emergency Clean-up	183.89	
02 90 55 00-0044	MO	8 Gallon, Commercial Carpet Extractor Rental For Emergency Clean-up	476.43	
02 90 55 00-0045	DAY	17 to 30 Gallon, Commercial Carpet Extractor Rental For Emergency Clean-up	109.66	
02 90 55 00-0046	WK	17 to 30 Gallon, Commercial Carpet Extractor Rental For Emergency Clean-up	312.94	
02 90 55 00-0047	MO	17 to 30 Gallon, Commercial Carpet Extractor Rental For Emergency Clean-up	874.63	
02 90 55 00-0048	DAY	Truck Mounted Extractor Rental For Emergency Clean-up	1,019.75	
02 90 55 00-0049	WK	Truck Mounted Extractor Rental For Emergency Clean-up	3,059.25	
02 90 55 00-0050	MO	Truck Mounted Extractor Rental For Emergency Clean-up	9,177.75	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 90 55 00-0051	DAY	16" Chain Saw Rental For Emergency Clean-up	80.24	
02 90 55 00-0052	WK	16" Chain Saw Rental For Emergency Clean-up	180.54	
02 90 55 00-0053	MO	16" Chain Saw Rental For Emergency Clean-up	481.45	
02 90 55 00-0054	DAY	20" Chain Saw Rental For Emergency Clean-up	100.30	
02 90 55 00-0055	WK	20" Chain Saw Rental For Emergency Clean-up	225.68	
02 90 55 00-0056	MO	20" Chain Saw Rental For Emergency Clean-up	601.81	
02 90 55 00-0057	EA	Cleaning Kit With Mop, Broom And Bucket For Emergency Clean-up	75.23	
02 90 55 00-0058	DAY	14" To 16" Electric Cut Off Saw Rental For Emergency Clean-up	106.99	
02 90 55 00-0059	WK	14" To 16" Electric Cut Off Saw Rental For Emergency Clean-up	292.55	
02 90 55 00-0060	MO	14" To 16" Electric Cut Off Saw Rental For Emergency Clean-up	819.13	
02 90 55 00-0061	DAY	12" To 14" Gasoline Cut Off Saw Rental For Emergency Clean-up	130.39	
02 90 55 00-0062	WK	12" To 14" Gasoline Cut Off Saw Rental For Emergency Clean-up	443.00	
02 90 55 00-0063	MO	12" To 14" Gasoline Cut Off Saw Rental For Emergency Clean-up	844.21	
02 90 55 00-0064	DAY	Wet Or Dry Portable Cleaning Unit For Emergency Clean-up	121.22	
02 90 55 00-0065	WK	Wet Or Dry Portable Cleaning Unit For Emergency Clean-up	333.35	
02 90 55 00-0066	MO	Wet Or Dry Portable Cleaning Unit For Emergency Clean-up	909.15	
02 90 55 00-0067	DAY	Extension Cords - 220 Volt For Emergency Clean-up	41.79	
02 90 55 00-0068	DAY	Extension Cords - 220 Volt Converter Box For Emergency Clean-up	25.08	
02 90 55 00-0069	DAY	Demolition Cart, 1 Yard For Emergency Clean-up	66.87	
02 90 55 00-0070	WK	Demolition Cart, 1 Yard For Emergency Clean-up	183.89	
02 90 55 00-0071	MO	Demolition Cart, 1 Yard For Emergency Clean-up	501.51	
02 90 55 00-0072	DAY	Demolition Cart, 1-1/2 Yard For Emergency Clean-up	83.58	
02 90 55 00-0073	WK	Demolition Cart, 1-1/2 Yard For Emergency Clean-up	229.86	
02 90 55 00-0074	MO	Demolition Cart, 1-1/2 Yard For Emergency Clean-up	626.89	
02 90 55 00-0075	EA	Demolition Kit With Wheel Barrow, Shovel And Broom For Emergency Clean-up	125.38	
02 90 55 00-0076	DAY	Dry-Ice Blasting System For Emergency Clean-up	1,797.18	
02 90 55 00-0077	DAY	Fogger - Mist For Emergency Clean-up	35.65	
02 90 55 00-0078	WK	Fogger - Mist For Emergency Clean-up	98.05	
02 90 55 00-0079	MO	Fogger - Mist For Emergency Clean-up	267.40	
02 90 55 00-0080	DAY	Fogger - Electric Thermal For Emergency Clean-up	51.34	
02 90 55 00-0081	WK	Fogger - Electric Thermal For Emergency Clean-up	141.18	
02 90 55 00-0082	MO	Fogger - Electric Thermal For Emergency Clean-up	385.05	
02 90 55 00-0083	DAY	Fogger - Gas Power Thermal For Emergency Clean-up	201.84	
02 90 55 00-0084	WK	Fogger - Gas Power Thermal For Emergency Clean-up	555.07	
02 90 55 00-0085	MO	Fogger - Gas Power Thermal For Emergency Clean-up	1,513.82	
02 90 55 00-0086	EA	Gang Box, Demo/Framing (One Time Per Job) For Emergency Clean-up	169.78	
02 90 55 00-0087	WK	Gang Box, Demo/Framing (One Time Per Job) For Emergency Clean-up	466.88	
02 90 55 00-0088	MO	Gang Box, Demo/Framing (One Time Per Job) For Emergency Clean-up	1,273.31	
02 90 55 00-0089	DAY	Hand Trucks/Dollies For Emergency Clean-up	20.06	
02 90 55 00-0090	WK	Hand Trucks/Dollies For Emergency Clean-up	55.17	
02 90 55 00-0091	MO	Hand Trucks/Dollies For Emergency Clean-up	150.45	
02 90 55 00-0092	DAY	Heat Gun - Shrink Wrap For Emergency Clean-up	138.46	
02 90 55 00-0093	WK	Heat Gun - Shrinkwrap For Emergency Clean-up	380.76	
02 90 55 00-0094	MO	Heat Gun - Shrinkwrap For Emergency Clean-up	1,038.43	
02 90 55 00-0095	DAY	High Efficiency Particulate Air (HEPA) Negative Air Machine For Emergency Clean-up Note: Includes all filters.	149.40	
02 90 55 00-0096	DAY	Ladder For Emergency Clean-up	28.42	
02 90 55 00-0097	DAY	Lights - Demo, Drop, Stand, String For Emergency Clean-up	25.67	
02 90 55 00-0098	DAY	Lights - Wobble For Emergency Clean-up	31.37	
02 90 55 00-0099	DAY	Moisture Meter For Emergency Clean-up	42.78	
02 90 55 00-0100	WK	Moisture Meter For Emergency Clean-up	117.65	
02 90 55 00-0101	MO	Moisture Meter For Emergency Clean-up	320.87	
02 90 55 00-0102	DAY	Nail Gun For Emergency Clean-up	75.23	
02 90 55 00-0103	WK	Nail Gun For Emergency Clean-up	206.87	
02 90 55 00-0104	MO	Nail Gun For Emergency Clean-up	564.20	
02 90 55 00-0105	DAY	Ozone Generator For Emergency Clean-up	178.26	
02 90 55 00-0106	DAY	PPE (Personal Protective Equipment) Mold Remediation Related For Emergency Clean-up	100.30	
02 90 55 00-0107	DAY	Portable Generator, Up To 7,500 Watt For Emergency Clean-up	142.61	
02 90 55 00-0108	DAY	Pressure Washer, Hot For Emergency Clean-up	213.92	
02 90 55 00-0109	DAY	Pressure Washer, Cold For Emergency Clean-up	142.61	
02 90 55 00-0110	DAY	Scaffolding - Per Section For Emergency Clean-up	108.66	
02 90 55 00-0111	DAY	Small Tools - Tool Box For Emergency Clean-up	41.79	
02 90 55 00-0112	DAY	Soda Blasting Equipment For Emergency Clean-up	1,783.33	
02 90 55 00-0113	DAY	Sprayer - Hudson For Emergency Clean-up	13.37	
02 90 55 00-0114	WK	Sprayer - Hudson For Emergency Clean-up	36.78	
02 90 55 00-0115	MO	Sprayer - Hudson For Emergency Clean-up	100.30	
02 90 55 00-0116	DAY	0.47 GPM, Airless Paint Sprayer For Emergency Clean-up	90.34	
02 90 55 00-0117	WK	0.47 GPM, Airless Paint Sprayer For Emergency Clean-up	265.80	
02 90 55 00-0118	MO	0.47 GPM, Airless Paint Sprayer For Emergency Clean-up	909.77	
02 90 55 00-0119	DAY	0.60 GPM, Airless Paint Sprayer For Emergency Clean-up	178.14	
02 90 55 00-0120	WK	0.60 GPM, Airless Paint Sprayer For Emergency Clean-up	419.90	
02 90 55 00-0121	MO	0.60 GPM, Airless Paint Sprayer For Emergency Clean-up	1,170.62	
02 90 55 00-0122	DAY	0.80 GPM, Airless Paint Sprayer For Emergency Clean-up	190.86	
02 90 55 00-0123	WK	0.80 GPM, Airless Paint Sprayer For Emergency Clean-up	477.15	
02 90 55 00-0124	MO	0.80 GPM, Airless Paint Sprayer For Emergency Clean-up	1,285.14	
02 90 55 00-0125	DAY	Storage Space (Per SF Per Day) For Emergency Clean-up	4.81	
02 90 55 00-0126	DAY	Submersible Pump For Emergency Clean-up	35.65	
02 90 55 00-0127	DAY	Trash Pump - 2" Gas Powered For Emergency Clean-up	256.61	
02 90 55 00-0128	DAY	Vehicle, Pick-up, SUV, Car For Emergency Clean-up	127.38	
02 90 55 00-0129	DAY	Vehicle, Van For Emergency Clean-up	207.69	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 90 55 00-0130	DAY	16' Or 24' Box Truck Vehicle For Emergency Clean-up Note: Includes Mileage	280.34	
02 90 55 00-0131	DAY	Trailer - Refrigerated 40' Storage For Emergency Clean-up	275.99	
02 90 55 00-0132	DAY	Utility Trailer For Emergency Clean-up Note: Includes Mileage	229.84	
02 90 55 00-0133	DAY	Truck Mount, Per Wand Extraction For Emergency Clean-up	1,036.59	
02 90 55 00-0134	DAY	High Efficiency Particulate Air (HEPA) Backpack Vacuum For Emergency Clean-up	35.65	
02 90 55 00-0135	WK	High Efficiency Particulate Air (HEPA) Backpack Vacuum For Emergency Clean-up	98.05	
02 90 55 00-0136	MO	High Efficiency Particulate Air (HEPA) Backpack Vacuum For Emergency Clean-up	267.40	
02 90 55 00-0137	DAY	12 Gallon, Industrial High Efficiency Particulate Air (HEPA) Vacuum For Emergency Clean-up	121.22	
02 90 55 00-0138	WK	12 Gallon, Industrial High Efficiency Particulate Air (HEPA) Vacuum For Emergency Clean-up	333.35	
02 90 55 00-0139	MO	12 Gallon, Industrial High Efficiency Particulate Air (HEPA) Vacuum For Emergency Clean-up	909.15	
02 90 55 00-0140	DAY	Vacuum - Upright For Emergency Clean-up	30.46	
02 90 55 00-0141	WK	Vacuum - Upright For Emergency Clean-up	83.77	
02 90 55 00-0142	MO	Vacuum - Upright For Emergency Clean-up	228.45	
02 90 55 00-0143	DAY	12 To 23 Gallon, Wet/Dry Shop Vacuum For Emergency Clean-up	51.82	
02 90 55 00-0144	WK	12 To 23 Gallon, Wet/Dry Shop Vacuum For Emergency Clean-up	128.72	
02 90 55 00-0145	MO	12 To 23 Gallon, Wet/Dry Shop Vacuum For Emergency Clean-up	309.26	
02 90 55 00-0146	DAY	55 Gallon Wet/Dry Drum Top Vacuum For Emergency Clean-up	51.82	
02 90 55 00-0147	WK	55 Gallon Wet/Dry Drum Top Vacuum For Emergency Clean-up	128.72	
02 90 55 00-0148	MO	55 Gallon Wet/Dry Drum Top Vacuum For Emergency Clean-up	325.98	
02 90 55 00-0149	DAY	17 Gallon Wet Vacuum With Pump Discharge For Emergency Clean-up	118.69	
02 90 55 00-0150	WK	17 Gallon Wet Vacuum With Pump Discharge For Emergency Clean-up	317.62	
02 90 55 00-0151	MO	17 Gallon Wet Vacuum With Pump Discharge For Emergency Clean-up	886.00	
02 90 55 00-0152	DAY	Zip Wall Poles (Per 2 Poles) For Emergency Clean-up	35.65	
02 90 55 00-0153	WK	Zip Wall Poles (Per 2 Poles) For Emergency Clean-up	98.05	
02 90 55 00-0154	MO	Zip Wall Poles (Per 2 Poles) For Emergency Clean-up	267.40	
02 90 55 00-0155	DAY	10' x 10' Canopy For Emergency Clean-up	105.32	
02 90 55 00-0156	WK	10' x 10' Canopy For Emergency Clean-up	210.63	
02 90 55 00-0157	MO	10' x 10' Canopy For Emergency Clean-up	421.27	
02 90 55 00-0158	DAY	10' x 20' Canopy For Emergency Clean-up	210.63	
02 90 55 00-0159	WK	10' x 20' Canopy For Emergency Clean-up	421.27	
02 90 55 00-0160	MO	10' x 20' Canopy For Emergency Clean-up	842.54	
02 90 55 00-0161	DAY	16' x 16' Canopy For Emergency Clean-up	264.13	
02 90 55 00-0162	WK	16' x 16' Canopy For Emergency Clean-up	528.26	
02 90 55 00-0163	MO	16' x 16' Canopy For Emergency Clean-up	1,056.51	
02 90 55 00-0164	DAY	20' x 20' Canopy For Emergency Clean-up	351.06	
02 90 55 00-0165	WK	20' x 20' Canopy For Emergency Clean-up	702.11	
02 90 55 00-0166	MO	20' x 20' Canopy For Emergency Clean-up	1,404.23	
02 90 55 00-0167	DAY	20' x 30' Canopy For Emergency Clean-up	401.21	
02 90 55 00-0168	WK	20' x 30' Canopy For Emergency Clean-up	802.42	
02 90 55 00-0169	MO	20' x 30' Canopy For Emergency Clean-up	1,604.83	
02 90 55 00-0170	DAY	20' x 40' Canopy For Emergency Clean-up	468.08	
02 90 55 00-0171	WK	20' x 40' Canopy For Emergency Clean-up	936.15	
02 90 55 00-0172	MO	20' x 40' Canopy For Emergency Clean-up	1,872.30	
02 90 55 00-0173	DAY	First Aid Station For Emergency Clean-up	252.76	
02 90 55 00-0174	WK	First Aid Station For Emergency Clean-up	695.09	
02 90 55 00-0175	MO	First Aid Station For Emergency Clean-up	1,895.71	
02 90 55 00-0176	DAY	Portable Eyewash Station For Emergency Clean-up	76.76	
02 90 55 00-0177	WK	Portable Eyewash Station For Emergency Clean-up	211.10	
02 90 55 00-0178	MO	Portable Eyewash Station For Emergency Clean-up	575.73	
02 90 55 00-0179	DAY	2 Way Radio For Emergency Clean-up	41.70	
02 90 55 00-0180		**Technical/Electronics Restoration Equipment** *(02 90 55 00-0022)*		
02 90 55 00-0181	DAY	Computer - Diagnostic For Emergency Clean-up	41.79	
02 90 55 00-0182	WK	Computer - Diagnostic For Emergency Clean-up	114.93	
02 90 55 00-0183	MO	Computer - Diagnostic For Emergency Clean-up	313.44	
02 90 55 00-0184	DAY	Convection Oven - Large For Emergency Clean-up	805.82	
02 90 55 00-0185	WK	Convection Oven - Large For Emergency Clean-up	2,216.01	
02 90 55 00-0186	MO	Convection Oven - Large For Emergency Clean-up	6,043.67	
02 90 55 00-0187	DAY	Convection Oven - Small For Emergency Clean-up	150.45	
02 90 55 00-0188	WK	Convection Oven - Small For Emergency Clean-up	413.75	
02 90 55 00-0189	MO	Convection Oven - Small For Emergency Clean-up	1,128.40	
02 90 55 00-0190	DAY	Convection Oven - Vacuum For Emergency Clean-up	1,150.12	
02 90 55 00-0191	WK	Convection Oven - Vacuum For Emergency Clean-up	3,162.83	
02 90 55 00-0192	MO	Convection Oven - Vacuum For Emergency Clean-up	8,625.90	
02 90 55 00-0193	DAY	Decontamination Booth For Emergency Clean-up	950.74	
02 90 55 00-0194	WK	Decontamination Booth For Emergency Clean-up	2,614.54	
02 90 55 00-0195	MO	Decontamination Booth For Emergency Clean-up	7,130.56	
02 90 55 00-0196	DAY	DI Water System For Emergency Clean-up	73.84	
02 90 55 00-0197	WK	DI Water System For Emergency Clean-up	203.07	
02 90 55 00-0198	MO	DI Water System For Emergency Clean-up	553.83	
02 90 55 00-0199	DAY	ESD Bench Workstation For Emergency Clean-up	45.23	
02 90 55 00-0200	WK	ESD Bench Workstation For Emergency Clean-up	124.38	
02 90 55 00-0201	MO	ESD Bench Workstation For Emergency Clean-up	339.22	
02 90 55 00-0202	DAY	Heater/Enclosure Control System For Emergency Clean-up	25.08	
02 90 55 00-0203	WK	Heater/Enclosure Control System For Emergency Clean-up	68.96	
02 90 55 00-0204	MO	Heater/Enclosure Control System For Emergency Clean-up	188.07	
02 90 55 00-0205	DAY	Hi-Tech Mobile Cart/Workstation For Emergency Clean-up	116.30	
02 90 55 00-0206	WK	Hi-Tech Mobile Cart/Workstation For Emergency Clean-up	319.84	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 90 55 00-0207	MO	Hi-Tech Mobile Cart/Workstation For Emergency Clean-up	872.28	
02 90 55 00-0208	DAY	Micro-Blaster/Dust Collector For Emergency Clean-up	376.13	
02 90 55 00-0209	WK	Micro-Blaster/Dust Collector For Emergency Clean-up	1,034.36	
02 90 55 00-0210	MO	Micro-Blaster/Dust Collector For Emergency Clean-up	2,820.99	
02 90 55 00-0211	DAY	Mobile Laboratory For Emergency Clean-up	1,044.81	
02 90 55 00-0212	WK	Mobile Laboratory For Emergency Clean-up	2,873.23	
02 90 55 00-0213	MO	Mobile Laboratory For Emergency Clean-up	7,836.09	
02 90 55 00-0214	DAY	Nitrogen Enclosure Cabinet For Emergency Clean-up	20.06	
02 90 55 00-0215	WK	Nitrogen Enclosure Cabinet For Emergency Clean-up	55.17	
02 90 55 00-0216	MO	Nitrogen Enclosure Cabinet For Emergency Clean-up	150.45	
02 90 55 00-0217	DAY	Odell Cleaning Station For Emergency Clean-up	585.10	
02 90 55 00-0218	WK	Odell Cleaning Station For Emergency Clean-up	1,609.01	
02 90 55 00-0219	MO	Odell Cleaning Station For Emergency Clean-up	4,388.21	
02 90 55 00-0220	DAY	Parts Washer For Emergency Clean-up	41.79	
02 90 55 00-0221	WK	Parts Washer For Emergency Clean-up	114.93	
02 90 55 00-0222	MO	Parts Washer For Emergency Clean-up	313.44	
02 90 55 00-0223	DAY	Ultrasonic Cleaning System For Emergency Clean-up	346.14	
02 90 55 00-0224	WK	Ultrasonic Cleaning System For Emergency Clean-up	951.90	
02 90 55 00-0225	MO	Ultrasonic Cleaning System For Emergency Clean-up	2,596.08	
02 90 55 00-0226	DAY	Technical High Efficiency Particulate Air (HEPA) Vacuum For Emergency Clean-up	164.76	
02 90 55 00-0227	WK	Technical High Efficiency Particulate Air (HEPA) Vacuum For Emergency Clean-up	453.10	
02 90 55 00-0228	MO	Technical High Efficiency Particulate Air (HEPA) Vacuum For Emergency Clean-up	1,235.73	
02 90 55 00-0229		**Drying/Dehumidification Equipment** *(02 90 55 00-0022)*		
02 90 55 00-0230	DAY	202 CFM Water Extraction Unit With Dual 3-Stage Vacuums For Emergency Clean-up Note: Includes 25' high-pressure solution hose and 25' Vacuum hose.	178.26	
02 90 55 00-0231	WK	202 CFM Water Extraction Unit With Dual 3-Stage Vacuums For Emergency Clean-up Note: Includes 25' high-pressure solution hose and 25' Vacuum hose.	490.23	
02 90 55 00-0232	MO	202 CFM Water Extraction Unit With Dual 3-Stage Vacuums For Emergency Clean-up Note: Includes 25' high-pressure solution hose and 25' Vacuum hose.	1,336.98	
02 90 55 00-0233	DAY	2,200 CFM Centrifugal Air Mover For Emergency Clean-up	60.87	
02 90 55 00-0234	WK	2,200 CFM Centrifugal Air Mover For Emergency Clean-up	167.40	
02 90 55 00-0235	MO	2,200 CFM Centrifugal Air Mover For Emergency Clean-up	456.55	
02 90 55 00-0236	DAY	3,000 CFM Axial Air Mover For Emergency Clean-up	101.46	
02 90 55 00-0237	WK	3,000 CFM Axial Air Mover For Emergency Clean-up	279.00	
02 90 55 00-0238	MO	3,000 CFM Axial Air Mover For Emergency Clean-up	760.91	
02 90 55 00-0239	DAY	Injectidry System For Emergency Clean-up	221.05	
02 90 55 00-0240	WK	Injectidry System For Emergency Clean-up	607.88	
02 90 55 00-0241	MO	Injectidry System For Emergency Clean-up	1,657.85	
02 90 55 00-0242	DAY	Up To 100 Pints Water Removal Per Day, Refrigerant Dehumidifier For Emergency Clean-up	142.61	
02 90 55 00-0243	WK	Up To 100 Pints Water Removal Per Day, Refrigerant Dehumidifier For Emergency Clean-up	392.18	
02 90 55 00-0244	MO	Up To 100 Pints Water Removal Per Day, Refrigerant Dehumidifier For Emergency Clean-up	1,069.58	
02 90 55 00-0245	DAY	>100 To 175 Pints Water Removal Per Day, Refrigerant Dehumidifier For Emergency Clean-up	169.78	
02 90 55 00-0246	WK	>100 To 175 Pints Water Removal Per Day, Refrigerant Dehumidifier For Emergency Clean-up	466.88	
02 90 55 00-0247	MO	>100 To 175 Pints Water Removal Per Day, Refrigerant Dehumidifier For Emergency Clean-up	1,273.31	
02 90 55 00-0248	DAY	>175 To 250 Pints Water Removal Per Day, Refrigerant Dehumidifier For Emergency Clean-up	196.94	
02 90 55 00-0249	WK	>175 To 250 Pints Water Removal Per Day, Refrigerant Dehumidifier For Emergency Clean-up	541.58	
02 90 55 00-0250	MO	>175 To 250 Pints Water Removal Per Day, Refrigerant Dehumidifier For Emergency Clean-up	1,477.04	
02 90 55 00-0251	DAY	Phoenix 200 Refrigerant Dehumidifier For Emergency Clean-up	210.52	
02 90 55 00-0252	WK	Phoenix 200 Refrigerant Dehumidifier For Emergency Clean-up	578.93	
02 90 55 00-0253	MO	Phoenix 200 Refrigerant Dehumidifier For Emergency Clean-up	1,578.91	
02 90 55 00-0254	DAY	Phoenix 300 Refrigerant Dehumidifier For Emergency Clean-up	210.52	
02 90 55 00-0255	WK	Phoenix 300 Refrigerant Dehumidifier For Emergency Clean-up	578.93	
02 90 55 00-0256	MO	Phoenix 300 Refrigerant Dehumidifier For Emergency Clean-up	1,578.91	
02 90 55 00-0257	DAY	D-500 Desiccant Dehumidifier For Emergency Clean-up	237.68	
02 90 55 00-0258	WK	D-500 Desiccant Dehumidifier For Emergency Clean-up	653.63	
02 90 55 00-0259	MO	D-500 Desiccant Dehumidifier For Emergency Clean-up	1,782.64	
02 90 55 00-0260	DAY	D-750 Desiccant Dehumidifier For Emergency Clean-up	499.14	
02 90 55 00-0261	WK	D-750 Desiccant Dehumidifier For Emergency Clean-up	1,372.63	
02 90 55 00-0262	MO	D-750 Desiccant Dehumidifier For Emergency Clean-up	3,743.54	
02 90 55 00-0263	DAY	D-1000 Desiccant Dehumidifier For Emergency Clean-up	855.67	
02 90 55 00-0264	WK	D-1000 Desiccant Dehumidifier For Emergency Clean-up	2,353.08	
02 90 55 00-0265	MO	D-1000 Desiccant Dehumidifier For Emergency Clean-up	6,417.50	
02 90 55 00-0266	DAY	D-1500 Desiccant Dehumidifier For Emergency Clean-up	1,317.45	
02 90 55 00-0267	WK	D-1500 Desiccant Dehumidifier For Emergency Clean-up	3,623.00	
02 90 55 00-0268	MO	D-1500 Desiccant Dehumidifier For Emergency Clean-up	9,880.90	
02 90 55 00-0269	DAY	D-2000 Desiccant Dehumidifier For Emergency Clean-up	1,317.45	
02 90 55 00-0270	WK	D-2000 Desiccant Dehumidifier For Emergency Clean-up	3,623.00	
02 90 55 00-0271	MO	D-2000 Desiccant Dehumidifier For Emergency Clean-up	9,880.90	
02 90 55 00-0272	DAY	D-2250 Desiccant Dehumidifier For Emergency Clean-up	1,375.86	
02 90 55 00-0273	WK	D-2250 Desiccant Dehumidifier For Emergency Clean-up	3,783.61	
02 90 55 00-0274	MO	D-2250 Desiccant Dehumidifier For Emergency Clean-up	10,318.92	
02 90 55 00-0275	DAY	D-3000 Desiccant Dehumidifier For Emergency Clean-up	1,711.33	
02 90 55 00-0276	WK	D-3000 Desiccant Dehumidifier For Emergency Clean-up	4,706.16	
02 90 55 00-0277	MO	D-3000 Desiccant Dehumidifier For Emergency Clean-up	12,834.99	
02 90 55 00-0278	DAY	D-4500 Desiccant Dehumidifier For Emergency Clean-up	1,925.25	
02 90 55 00-0279	WK	D-4500 Desiccant Dehumidifier For Emergency Clean-up	5,294.43	
02 90 55 00-0280	MO	D-4500 Desiccant Dehumidifier For Emergency Clean-up	14,439.36	
02 90 55 00-0281	DAY	D-5000 Desiccant Dehumidifier For Emergency Clean-up	2,067.86	
02 90 55 00-0282	WK	D-5000 Desiccant Dehumidifier For Emergency Clean-up	5,686.61	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 90 55 00-0283	MO	D-5000 Desiccant Dehumidifier For Emergency Clean-up	15,508.95	
02 90 55 00-0284	DAY	D-9000 Desiccant Dehumidifier For Emergency Clean-up	2,716.40	
02 90 55 00-0285	WK	D-9000 Desiccant Dehumidifier For Emergency Clean-up	7,470.10	
02 90 55 00-0286	MO	D-9000 Desiccant Dehumidifier For Emergency Clean-up	20,373.00	
02 90 55 00-0287	DAY	D-10500 Desiccant Dehumidifier For Emergency Clean-up	2,852.22	
02 90 55 00-0288	WK	D-10500 Desiccant Dehumidifier For Emergency Clean-up	7,843.60	
02 90 55 00-0289	MO	D-10500 Desiccant Dehumidifier For Emergency Clean-up	21,391.65	
02 90 55 00-0290	DAY	3.5 Ton DX Unit - Heating / Air Conditioning For Emergency Clean-up	677.69	
02 90 55 00-0291	WK	3.5 Ton DX Unit - Heating / Air Conditioning For Emergency Clean-up	1,863.64	
02 90 55 00-0292	MO	3.5 Ton DX Unit - Heating / Air Conditioning For Emergency Clean-up	5,082.66	
02 90 55 00-0293	DAY	5 Ton DX Unit - Heating / Air Conditioning For Emergency Clean-up	938.34	
02 90 55 00-0294	WK	5 Ton DX Unit - Heating / Air Conditioning For Emergency Clean-up	2,580.43	
02 90 55 00-0295	MO	5 Ton DX Unit - Heating / Air Conditioning For Emergency Clean-up	7,037.53	
02 90 55 00-0296	DAY	10 Ton DX Unit - Heating / Air Conditioning For Emergency Clean-up	855.67	
02 90 55 00-0297	WK	10 Ton DX Unit - Heating / Air Conditioning For Emergency Clean-up	2,353.08	
02 90 55 00-0298	MO	10 Ton DX Unit - Heating / Air Conditioning For Emergency Clean-up	6,417.50	
02 90 55 00-0299	DAY	25 Ton DX Unit - Heating / Air Conditioning For Emergency Clean-up	1,140.89	
02 90 55 00-0300	WK	25 Ton DX Unit - Heating / Air Conditioning For Emergency Clean-up	3,137.44	
02 90 55 00-0301	MO	25 Ton DX Unit - Heating / Air Conditioning For Emergency Clean-up	8,556.66	
02 90 55 00-0302	DAY	50 Ton DX Unit - Heating / Air Conditioning For Emergency Clean-up	1,925.25	
02 90 55 00-0303	WK	50 Ton DX Unit - Heating / Air Conditioning For Emergency Clean-up	5,294.43	
02 90 55 00-0304	MO	50 Ton DX Unit - Heating / Air Conditioning For Emergency Clean-up	14,439.36	
02 90 55 00-0305	DAY	80 Ton DX Unit - Heating / Air Conditioning For Emergency Clean-up	2,139.16	
02 90 55 00-0306	WK	80 Ton DX Unit - Heating / Air Conditioning For Emergency Clean-up	5,882.70	
02 90 55 00-0307	MO	80 Ton DX Unit - Heating / Air Conditioning For Emergency Clean-up	16,043.74	
02 90 55 00-0308	DAY	25' Flex Duct For Emergency Clean-up	28.52	
02 90 55 00-0309	WK	25' Flex Duct For Emergency Clean-up	78.44	
02 90 55 00-0310	MO	25' Flex Duct For Emergency Clean-up	213.92	
02 90 55 00-0311	DAY	Hygrothermograph For Emergency Clean-up	41.79	
02 90 55 00-0312	WK	Hygrothermograph For Emergency Clean-up	114.93	
02 90 55 00-0313	MO	Hygrothermograph For Emergency Clean-up	313.44	
02 90 55 00-0314	DAY	Dehumidification Trailer With 1,500 CFM Desiccant Unit For Emergency Clean-up Note: Includes 400 KW generator, 1500 CFM desiccant DH, 25 Ton DX unit, 1000 gallon fuel tank, and limited electrical distribution.	9,811.79	
02 90 55 00-0315	WK	Dehumidification Trailer With 1,500 CFM Desiccant Unit For Emergency Clean-up Note: Includes 400 KW generator, 1500 CFM desiccant DH, 25 Ton DX unit, 1000 gallon fuel tank, and limited electrical distribution.	26,982.42	
02 90 55 00-0316	MO	Dehumidification Trailer With 1,500 CFM Desiccant Unit For Emergency Clean-up Note: Includes 400 KW generator, 1500 CFM desiccant DH, 25 Ton DX unit, 1000 gallon fuel tank, and limited electrical distribution.	73,588.43	

02 90 55 00-0317 Power Equipment *(02 90 55 00-0022)*

02 90 55 00-0318	WK	Up to 65 KVA Generator For Emergency Clean-up	1,290.84	
02 90 55 00-0319	WK	>65 to 125 KVA Generator For Emergency Clean-up	2,184.49	
02 90 55 00-0320	WK	>125 to 250 KVA Generator For Emergency Clean-up	2,130.56	
02 90 55 00-0321	WK	>250 to 375 KVA Generator For Emergency Clean-up	3,673.92	
02 90 55 00-0322	WK	>375 Up to 440 KVA Generator For Emergency Clean-up	4,964.75	
02 90 55 00-0323	WK	>440 to 625 KVA Generator For Emergency Clean-up	7,475.65	
02 90 55 00-0324	WK	>625 to 800 KVA Generator For Emergency Clean-up	7,645.72	
02 90 55 00-0325	WK	>800 to 1,000 KVA Generator For Emergency Clean-up	10,227.38	
02 90 55 00-0326	WK	>1,000 to 1,500 KVA Generator For Emergency Clean-up	15,390.72	
02 90 55 00-0327	EA	Generator Cable/Pigtails (Per Section) For Emergency Clean-up	33.36	
02 90 55 00-0328	EA	Sub-Distribution Panel (Spider Box) For Emergency Clean-up	159.86	
02 90 55 00-0329	EA	Electrical Distribution Panel For Emergency Clean-up	346.14	
02 90 55 00-0330	EA	Quad Box Strings (25' Sections) For Emergency Clean-up	60.07	
02 90 55 00-0331	EA	50' Power Cord For Spider Box For Emergency Clean-up	55.61	
02 90 55 00-0332	EA	Pig Tails (Per Each) For Emergency Clean-up	4.18	

02 90 55 00-0333 Freight Charges *(02 90 55 00-0022)*

02 90 55 00-0334	MI	Freight Up To 1 Ton Pick Up Truck For Emergency Clean-up Equipment	2.09	
02 90 55 00-0335	MI	Freight >1 Ton Pick Up Truck For Emergency Clean-up Equipment	3.76	
02 90 55 00-0336	MI	Freight 16' Or 24' Box Truck For Emergency Clean-up Equipment	3.76	
02 90 55 00-0337	MI	Freight Tractor Trailer For Emergency Clean-up Equipment	5.43	

02 90 55 00-0338 Emergency Clean-up Personal Protection Equipment *(02 90 55 00-0001)*

Note: Used in the performance of time and material projects. Not used in conjunction with tasks in the Cleaning, Contents Manipulation, and Water Emergency Cleanup sections.

02 90 55 00-0339	EA	Tyvek Coveralls For Emergency Clean-up Personal Protection Equipment	11.80	
02 90 55 00-0340	EA	Tyvek Coveralls With Elastic Wrists And Ankles For Emergency Clean-up Personal Protection Equipment	14.44	
02 90 55 00-0341	EA	Tyvek Coveralls With Hood, Elastic Wrists And Ankles For Emergency Clean-up Personal Protection Equipment	15.14	
02 90 55 00-0342	EA	Tyvek Coveralls With Hood, Boots, Elastic Wrists And Ankles For Emergency Clean-up Personal Protection Equipment	19.08	
02 90 55 00-0343	EA	Disposable Dual Cartridge Half-Mask Respirator For Emergency Clean-up Personal Protection Equipment	132.79	
02 90 55 00-0344	EA	N95 Respirator For Emergency Clean-up Personal Protection Equipment	5.17	
02 90 55 00-0345	EA	N95 Respirator With Valve For Emergency Clean-up Personal Protection Equipment	6.04	
02 90 55 00-0346	PR	3M Respirator Cartridges For Emergency Clean-up Personal Protection Equipment	40.55	
02 90 55 00-0347	EA	Respirator Cleaning Wipes, Per Box 100 For Emergency Clean-up Personal Protection Equipment	32.44	
02 90 55 00-0348	PR	P100 Respirator Cartridges For Emergency Clean-up Personal Protection Equipment	40.55	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 90 55 00-0349	EA	Respirator Cartridge For Emergency Clean-up Personal Protection Equipment	41.24	
02 90 55 00-0350	BOX	Dust Mask, Box of 50, For Emergency Clean-up Personal Protection Equipment	45.98	
02 90 55 00-0351	PR	Cotton Canvas Gloves For Emergency Clean-up Personal Protection Equipment	4.15	
02 90 55 00-0352	BOX	5 Mil, Disposable Latex Gloves, Box of 100, For Emergency Clean-up Personal Protection Equipment	21.39	
02 90 55 00-0353	PR	4 Mil, Disposable Nitrile Gloves For Emergency Clean-up Personal Protection Equipment	0.45	
02 90 55 00-0354	PR	5 Mil, Disposable Vinyl Gloves For Emergency Clean-up Personal Protection Equipment	0.38	
02 90 55 00-0355	PR	17 Mil, Latex Gloves For Emergency Clean-up Personal Protection Equipment	1.81	
02 90 55 00-0356	PR	15 Mil, Nitrile Gloves For Emergency Clean-up Personal Protection Equipment	4.29	
02 90 55 00-0357	PR	Vinyl Coated Gloves With Knit Lining For Emergency Clean-up Personal Protection Equipment	5.88	
02 90 55 00-0358	PR	30 Mil, Polyvinyl Chloride (PVC) And Polyvinyl Chloride (PVC) Blend Gloves For Emergency Clean-up Personal Protection Equipment	6.59	
02 90 55 00-0359	PR	Leather Gloves For Emergency Clean-up Personal Protection Equipment	10.70	
02 90 55 00-0360	EA	Heavy-Duty, Rubber Gloves For Emergency Clean-up Personal Protection Equipment	18.27	
02 90 55 00-0361	PR	Polycarbonate Lens Safety Goggles For Emergency Clean-up Personal Protection Equipment	12.37	
02 90 55 00-0362	PR	Chemical Splash/Impact Resistant, Polycarbonate Lens Safety Goggles For Emergency Clean-up Personal Protection Equipment	20.40	
02 90 55 00-0363	PR	Plastic Safety Glasses For Emergency Clean-up Personal Protection Equipment	5.42	
02 90 55 00-0364	EA	Safety Harness (Per Person/Day) For Emergency Clean-up Personal Protection Equipment	7.13	

02 90 55 00-0365 Emergency Clean-up Expendables *(02 90 55 00-0001)*

Note: Used in the performance of time and material projects. Not used in conjunction with tasks in the Cleaning, Contents Manipulation, and Water Emergency Cleanup sections.

02 90 55 00-0366 General Materials *(02 90 55 00-0365)*

02 90 55 00-0367	GAL	Adhesive Remover For Emergency Clean-up	85.57	
02 90 55 00-0368	GAL	Bioside-HS Cleaning Solution For Emergency Clean-up	28.50	
02 90 55 00-0369	GAL	Biocide Mold Cleaning Solution For Emergency Clean-up	36.36	
02 90 55 00-0370	EA	10" x 12" x 15" Cardboard Storage Box For Emergency Clean-up	4.51	
02 90 55 00-0371	EA	10" x 12" x 24" Cardboard Storage Box For Emergency Clean-up	6.85	
02 90 55 00-0372	EA	10" x 15" x 24" Cardboard Storage Box For Emergency Clean-up	6.85	
02 90 55 00-0373	GAL	Bleach For Emergency Clean-up	9.20	
02 90 55 00-0374	EA	Small Stainless Brush For Emergency Clean-up	7.38	
02 90 55 00-0375	EA	2-1/2 Gallon Buckets For Emergency Clean-up	7.06	
02 90 55 00-0376	EA	5 Gallon Bucket For Emergency Clean-up	10.70	
02 90 55 00-0377	GAL	Carpet Defoamer For Emergency Clean-up	27.52	
02 90 55 00-0378	GAL	Carpet Pre-treat For Emergency Clean-up	27.32	
02 90 55 00-0379	GAL	Carpet Spotter For Emergency Clean-up	45.78	
02 90 55 00-0380	GAL	Carpet/Upholstery Cleaner For Emergency Clean-up	36.92	
02 90 55 00-0381	ROL	Carpet Masking/Shield For Emergency Clean-up	114.31	
02 90 55 00-0382	EA	Chemical Sponge For Emergency Clean-up	3.37	
02 90 55 00-0383	GAL	Clear Seal For Emergency Clean-up	115.04	
02 90 55 00-0384	GAL	Coil Cleaner For Emergency Clean-up	78.70	
02 90 55 00-0385	EA	Decontamination Chamber For Emergency Clean-up	341.97	
02 90 55 00-0386	GAL	All Purpose Degreaser For Emergency Clean-up	37.65	
02 90 55 00-0387	GAL	De-Foamer Liquid For Emergency Clean-up	49.48	
02 90 55 00-0388	EA	Deodorization Membrane For Emergency Clean-up	95.84	
02 90 55 00-0389	GAL	9-D-9 Smoke Deodorizer For Emergency Clean-up	147.91	
02 90 55 00-0390	LB	Deodorizing Gel For Emergency Clean-up	34.75	
02 90 55 00-0391	GAL	Deodorizing Liquid For Emergency Clean-up	50.82	
02 90 55 00-0392	PAIL	Deodorizing Block For Emergency Clean-up	8.74	
02 90 55 00-0393	GAL	Disinfectant/Anti-microbial For Emergency Clean-up	90.16	
02 90 55 00-0394	GAL	BruClean Disinfectant For Emergency Clean-up	40.04	
02 90 55 00-0395	GAL	Dryclean For Emergency Clean-up	39.93	
02 90 55 00-0396	GAL	Duct Sealant Spray For Emergency Clean-up	60.18	
02 90 55 00-0397	GAL	Antifungal Duct Sealant For Emergency Clean-up	86.93	
02 90 55 00-0398	GAL	Microbial Encapsulant (Fosters 20 - 40) For Emergency Clean-up	133.39	
02 90 55 00-0399	PR	Ear Plugs For Emergency Clean-up Personal Protection Equipment	0.54	
02 90 55 00-0400	GAL	Encapsulant For Emergency Clean-up	121.10	
02 90 55 00-0401	GAL	Aftershock Fiberlocke For Emergency Clean-up	106.34	
02 90 55 00-0402	GAL	IAQ 2500 Fiberlocke For Emergency Clean-up	103.22	
02 90 55 00-0403	GAL	IAS 6000 Fiberlocke For Emergency Clean-up	106.16	
02 90 55 00-0404	ROL	Filter Material For Emergency Clean-up	306.70	
02 90 55 00-0405	EA	Blue Paper Collection Bag Filter For Emergency Clean-up	8.26	
02 90 55 00-0406	EA	CVAC Filter For High Efficiency Particulate Air (HEPA) Vacuum For Emergency Clean-up	655.98	
02 90 55 00-0407	EA	Pre-Filter For Negative Air Machine For Emergency Clean-up	3.15	
02 90 55 00-0408	EA	Pleated Filter For Negative Air Machine For Emergency Clean-up	14.01	
02 90 55 00-0409	EA	Charcoal Filter For Negative Air Machine For Emergency Clean-up	49.89	
02 90 55 00-0410	EA	High Efficiency Particulate Air (HEPA) Filter For Negative Air Machine For Emergency Clean-up	474.46	
02 90 55 00-0411	EA	Pleated Dehumidifier Filter For Emergency Clean-up	12.52	
02 90 55 00-0412	GAL	Floor Stripper For Emergency Clean-up	18.72	
02 90 55 00-0413	GAL	Floor Wax For Emergency Clean-up	26.75	
02 90 55 00-0414	GAL	Fogger (Thermal) For Emergency Clean-up	156.88	
02 90 55 00-0415	BOX	Furniture Blocks For Emergency Clean-up	126.36	
02 90 55 00-0416	EA	Furniture Polish, Per 10 Oz Can For Emergency Clean-up	17.03	
02 90 55 00-0417	GAL	Glass Cleaner For Emergency Clean-up	11.35	
02 90 55 00-0418	EA	Goof Off Spray, 12 Oz For Emergency Clean-up	19.86	
02 90 55 00-0419	EA	Halogen Light Bulbs For Emergency Clean-up	19.10	
02 90 55 00-0420	QT	Hand Sanitizer For Emergency Clean-up	9.44	
02 90 55 00-0421	EA	Hard Hats For Emergency Clean-up Personal Protection Equipment	7.77	
02 90 55 00-0422	BOX	Hog Rings, Box Of 2,500 For Emergency Clean-up	24.20	
02 90 55 00-0423	GAL	HVAC Coal Cleaner For Emergency Clean-up	70.52	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 90 55 00-0424	BOX	Inventory Tag, Box Of 1,000 For Emergency Clean-up	170.20	
02 90 55 00-0425	EA	Utility Knives For Emergency Clean-up	14.71	
02 90 55 00-0426	ROL	13" Lay Flat Tubing (250' Roll) For Emergency Clean-up	146.00	
02 90 55 00-0427	ROL	20" Lay Flat Tubing (250' Roll) For Emergency Clean-up	154.14	
02 90 55 00-0428	ROL	29" Lay Flat Tubing (250' Roll) For Emergency Clean-up	306.89	
02 90 55 00-0429	ROL	39" Lay Flat Tubing (250' Roll) For Emergency Clean-up	443.59	
02 90 55 00-0430	GAL	Lemon Oil For Emergency Clean-up	45.64	
02 90 55 00-0431	GAL	LPS 1/Mecca Lube For Emergency Clean-up	48.60	
02 90 55 00-0432	GAL	LPS 2 For Emergency Clean-up	51.43	
02 90 55 00-0433	GAL	LPS Contact Cleaner For Emergency Clean-up	51.19	
02 90 55 00-0434	GAL	Light Lubricant Preserve For Emergency Clean-up	177.67	
02 90 55 00-0435	GAL	Heavy Lubricant Preserver For Emergency Clean-up	26.75	
02 90 55 00-0436	GAL	Machinery Cleaning Solvent For Emergency Clean-up	218.49	
02 90 55 00-0437	GAL	Metal Polishing Paste For Emergency Clean-up	32.89	
02 90 55 00-0438	GAL	MediClean® Disinfectant For Emergency Clean-up	54.06	
02 90 55 00-0439	GAL	Dri-Eaz Milgo Plus Sanitizer For Emergency Clean-up	66.35	
02 90 55 00-0440	EA	Mop Heads For Emergency Clean-up	8.11	
02 90 55 00-0441	EA	Nylon Scouring Pads For Emergency Clean-up	1.47	
02 90 55 00-0442	GAL	Odor Neutralizer For Emergency Clean-up	45.78	
02 90 55 00-0443	EA	Packing Paper, 25 Lb. Bundle For Emergency Clean-up	88.51	
02 90 55 00-0444	EA	Paint Brushes For Emergency Clean-up	6.69	
02 90 55 00-0445	ROL	Corrugated/Craft Paper, 48" x 250' For Emergency Clean-up	206.41	
02 90 55 00-0446	EA	Putty Knives For Emergency Clean-up	6.06	
02 90 55 00-0447	ROL	Red Resin Paper, 200' Roll For Emergency Clean-up	45.04	
02 90 55 00-0448	GAL	Reodorant For Emergency Clean-up	113.68	
02 90 55 00-0449	GAL	Restoracide For Emergency Clean-up	53.32	
02 90 55 00-0450	GAL	Rust Remover For Emergency Clean-up	79.86	
02 90 55 00-0451	EA	Saltesmo Test Samples For Emergency Clean-up	7.42	
02 90 55 00-0452	EA	Sand Bag For Emergency Clean-up Note: Excludes sand material	1.94	
02 90 55 00-0453	EA	Scotch-Brite 7447, Per Box 50 For Emergency Clean-up	35.44	
02 90 55 00-0454	EA	Small Scrub Brushes For Emergency Clean-up	16.98	
02 90 55 00-0455	GAL	Clear Soot Sealant For Emergency Clean-up	92.62	
02 90 55 00-0456	GAL	Pigmented Soot Sealant For Emergency Clean-up	249.78	
02 90 55 00-0457	ROL	Shrinkwrap Plastic For Emergency Clean-up	57.50	
02 90 55 00-0458	EA	Dry Sponges For Emergency Clean-up	5.91	
02 90 55 00-0459	EA	Spray Adhesive, Per Can For Emergency Clean-up	6.00	
02 90 55 00-0460	EA	Spray Bot./Trigger For Emergency Clean-up	5.16	
02 90 55 00-0461	GAL	Stain Remover For Emergency Clean-up	41.35	
02 90 55 00-0462	GAL	Stainless Steel Cleaner For Emergency Clean-up	11.30	
02 90 55 00-0463	EA	Stainless Steel Polish, Per Can For Emergency Clean-up	14.83	
02 90 55 00-0464	LB	Sweeping Compound For Emergency Clean-up	0.72	
02 90 55 00-0465	ROL	Duct Tape, 2" x 50 YD For Emergency Clean-up	11.73	
02 90 55 00-0466	ROL	Environmental (Teal) Tape, 3/4" x 1,440' For Emergency Clean-up	11.04	
02 90 55 00-0467	ROL	HVAC (Aluminum) Tape, 2" x 75' For Emergency Clean-up	29.42	
02 90 55 00-0468	ROL	Blue Masking (Painters) Tape, 1-1/2" x 198' For Emergency Clean-up	15.71	
02 90 55 00-0469	ROL	Poly Box Tape, 2" x 110 YD For Emergency Clean-up	4.85	
02 90 55 00-0470	LB	Terry Towels For Emergency Clean-up	6.89	
02 90 55 00-0471	GAL	Thermal Fog For Emergency Clean-up	93.04	
02 90 55 00-0472	ROL	1.7 Mil, 55 Gallon Trash Bags, 50/Roll For Emergency Clean-up	36.51	
02 90 55 00-0473	ROL	3 Mil, 55 Gallon Trash Bags, 50/Roll For Emergency Clean-up	88.60	
02 90 55 00-0474	ROL	4 Mil, 55 Gallon Trash Bags, 50/Roll For Emergency Clean-up	113.68	
02 90 55 00-0475	ROL	6 Mil, 55 Gallon Trash Bags, 50/Roll For Emergency Clean-up	145.60	
02 90 55 00-0476	EA	Trisodium Phosphate, 20 Lb. Pail For Emergency Clean-up	48.80	
02 90 55 00-0477	EA	Backpack Vacuum Bags For Emergency Clean-up	1.64	
02 90 55 00-0478	EA	Upright Vacuum Bags For Emergency Clean-up	2.19	
02 90 55 00-0479	GAL	Vinyl And Leather Cleaner For Emergency Clean-up	36.92	
02 90 55 00-0480	ROL	1 Mil Visqueen, 12' x 400', For Emergency Clean-up	47.30	
02 90 55 00-0481	ROL	4 Mil Visqueen, 32' x 100', For Emergency Clean-up	128.43	
02 90 55 00-0482	ROL	6 Mil Visqueen, 32' x 400', For Emergency Clean-up	175.24	
02 90 55 00-0483	LB	Wipes, Cotton Cloth For Emergency Clean-up	4.97	
02 90 55 00-0484	ROL	12" x 750', Wrap, Bubble/Anti-static For Emergency Clean-up	144.24	
02 90 55 00-0485	EA	Wyp-Alls, Case Of 160 Wipes For Emergency Clean-up	18.46	
02 90 55 00-0486	EA	Zip Wall Zippers For Emergency Clean-up	21.89	
02 90 55 00-0487	EA	Absorbent Matt Roll For Oil And Other Liquids - 15" Wide x 50' Roll Note: 3.3 gallon volume absorption capacity per roll	35.66	
02 90 55 00-0488	EA	Oil Only Sorbent Pads - 15" x 19", Light, Package Of 100 Note: 26 OZ volume absorption capacity per pad	53.49	
02 90 55 00-0489	EA	Oil Only Sorbent Pads - 15" x 19", Medium, Package Of 100 Note: 33 OZ volume absorption capacity per pad	56.36	
02 90 55 00-0490	EA	Oil Only Sorbent Pads - 15" x 19", Heavy, Package Of 100 Note: 45 OZ volume absorption capacity per pad	92.02	

02 90 55 00-0491 Technical/Electronics Restoration Materials *(02 90 55 00-0365)*

02 90 55 00-0492	EA	Brush - Brass For Emergency Clean-up	5.02	
02 90 55 00-0493	EA	1" Brush, Natural Bristle For Emergency Clean-up	1.60	
02 90 55 00-0494	EA	1/2" Brush, Natural Bristle For Emergency Clean-up	1.34	
02 90 55 00-0495	EA	1/4" Brush, Natural Bristle For Emergency Clean-up	1.14	
02 90 55 00-0496	EA	Brush - Parts For Emergency Clean-up	6.95	
02 90 55 00-0497	EA	Brush - Plastic For Emergency Clean-up	3.61	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
02 90 55 00-0498	EA	Brush - Wire Grout For Emergency Clean-up	9.69	
02 90 55 00-0499	EA	Brushing Tool For Emergency Clean-up	18.69	
02 90 55 00-0500	EA	Cleaning Swabs, Cotton For Emergency Clean-up	0.33	
02 90 55 00-0501	EA	Cleaning Swabs, Foam Tip For Emergency Clean-up	0.40	
02 90 55 00-0502	EA	Contact Restorer, Per Can For Emergency Clean-up	30.40	
02 90 55 00-0503	EA	Contact Spray, Per Can For Emergency Clean-up	20.69	
02 90 55 00-0504	UNT	Corrosion Inhibitor Emitter - 1 CF For Emergency Clean-up	3.21	
02 90 55 00-0505	UNT	Corrosion Inhibitor Emitter - 5 CF For Emergency Clean-up	9.19	
02 90 55 00-0506	UNT	Corrosion Inhibitor Emitter - 10 CF For Emergency Clean-up	11.91	
02 90 55 00-0507	LB	Cotton Cleaning Cloths For Emergency Clean-up	18.81	
02 90 55 00-0508	EA	12" x 17" Dust Cloths For Emergency Clean-up	0.30	
02 90 55 00-0509	EA	24" x 24" Dust Cloths For Emergency Clean-up	0.82	
02 90 55 00-0510	EA	Deoxidizing Agent, Per Can For Emergency Clean-up	14.73	
02 90 55 00-0511	GAL	Electronic Grade Detergent For Emergency Clean-up	41.54	
02 90 55 00-0512	SHT	Inventory Labels For Emergency Clean-up	0.22	
02 90 55 00-0513	GAL	Isopropyl Alcohol For Emergency Clean-up	110.07	
02 90 55 00-0514	GAL	Lubrication/Penetrating Oil, Per Can For Emergency Clean-up	179.14	
02 90 55 00-0515	GAL	PC Board Detergent For Emergency Clean-up	85.88	
02 90 55 00-0516	GAL	Rust Inhibitor, Regular Duty For Emergency Clean-up	141.18	
02 90 55 00-0517	GAL	Rust Inhibitor, Moderate Duty For Emergency Clean-up	142.24	
02 90 55 00-0518	GAL	Rust Inhibitor, Severe Duty For Emergency Clean-up	152.04	
02 90 55 00-0519	LB	Wipes, Lint Free Cloths For Emergency Clean-up	7.81	
02 90 55 00-0520	EA	Wire Marker Card For Emergency Clean-up	2.34	
02 90 55 00-0521	EA	Steel Wool, 16 Pad Sleeve For Emergency Clean-up	1.57	

END OF SECTION 02

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

05 Metals

05 01 Maintenance of Metals *(05)*

05 01 50 Maintenance of Metal Fabrications *(05 01)*

05 01 50 51 Cleaning of Metal Fabrications *(05 01 50)*
See CSI section 09 01 90 52-0016 for cleaning of metal surfaces.

05 01 50 61 Repair of Metal Fabrications *(05 01 50)*
See CSI section 05 05 21 00-0001 for welding, 05 05 23 00-1580 for torch cutting.

05 01 50 63 Refinishing of Metal Fabrications *(05 01 50)*
See CSI section 05 12 23 00-0143 for field applied cold galvanizing, 05 12 23 00-0145 for metal grinding.

05 01 70 Maintenance of Decorative Metal *(05 01)*

05 01 70 51 Cleaning of Decorative Metal *(05 01 70)*
See CSI section 09 01 90 52-0016 for cleaning of metal surfaces.

05 01 70 61 Repair of Decorative Metal *(05 01 70)*
See CSI section 05 05 21 00-0001 for welding, 05 05 23 00-1580 for torch cutting.

05 01 70 63 Refinishing of Decorative Metal *(05 01 70)*
See CSI section 05 12 23 00-0143 for field applied cold galvanizing, 05 12 23 00-0145 for metal grinding.

05 05 Common Work Results for Metals *(05)*

05 05 19 Post-Installed Concrete Anchors *(05 05)*

05 05 19 00-0001 Concrete And Masonry Anchors *(05 05 19)*

05 05 19 00-0002 Expansion Anchors *(05 05 19 00-0001)*
Note: Includes drilling.

05 05 19 00-0003 Wedge Expansion Bolt Anchors *(05 05 19 00-0002)*

05 05 19 00-0004 Zinc Plated Steel, Wedge Anchor Expansion Bolt *(05 05 19 00-0003)*
Note: Includes nut and washer.

05 05 19 00-0005	EA	1/4" Diameter x 1-3/4" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt		14.66	
		For >10 To 50, Deduct		*-0.70*	
		For >50 To 100, Deduct		*-1.42*	
		For >100, Deduct		*-2.84*	
05 05 19 00-0006	EA	1/4" Diameter x 2-1/4" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt		14.75	
		For >10 To 50, Deduct		*-0.70*	
		For >50 To 100, Deduct		*-1.42*	
		For >100, Deduct		*-2.85*	
05 05 19 00-0007	EA	1/4" Diameter x 3-1/4" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt		15.18	
		For >10 To 50, Deduct		*-0.72*	
		For >50 To 100, Deduct		*-1.46*	
		For >100, Deduct		*-2.93*	
05 05 19 00-0008	EA	3/8" Diameter x 2-1/4" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt		17.95	
		For >10 To 50, Deduct		*-0.86*	
		For >50 To 100, Deduct		*-1.73*	
		For >100, Deduct		*-3.47*	
05 05 19 00-0009	EA	3/8" Diameter x 2-3/4" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt		18.02	
		For >10 To 50, Deduct		*-0.86*	
		For >50 To 100, Deduct		*-1.73*	
		For >100, Deduct		*-3.47*	
05 05 19 00-0010	EA	3/8" Diameter x 3" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt		18.03	
		For >10 To 50, Deduct		*-0.86*	
		For >50 To 100, Deduct		*-1.73*	
		For >100, Deduct		*-3.47*	
05 05 19 00-0011	EA	3/8" Diameter x 5" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt		18.30	
		For >10 To 50, Deduct		*-0.86*	
		For >50 To 100, Deduct		*-1.74*	
		For >100, Deduct		*-3.48*	
05 05 19 00-0012	EA	1/2" Diameter x 2-3/4" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt		25.83	
		For >10 To 50, Deduct		*-1.22*	
		For >50 To 100, Deduct		*-2.47*	
		For >100, Deduct		*-4.94*	
05 05 19 00-0013	EA	1/2" Diameter x 3-3/4" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt		25.88	
		For >10 To 50, Deduct		*-1.22*	
		For >50 To 100, Deduct		*-2.47*	
		For >100, Deduct		*-4.94*	
05 05 19 00-0014	EA	1/2" Diameter x 4-1/4" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt		25.99	
		For >10 To 50, Deduct		*-1.22*	
		For >50 To 100, Deduct		*-2.47*	
		For >100, Deduct		*-4.95*	
05 05 19 00-0015	EA	1/2" Diameter x 5-1/2" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt		26.29	
		For >10 To 50, Deduct		*-1.22*	
		For >50 To 100, Deduct		*-2.48*	
		For >100, Deduct		*-4.96*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 19 00-0016	EA	1/2" Diameter x 7" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt	26.70	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.49*	
		For >100, Deduct	*-4.98*	
05 05 19 00-0017	EA	5/8" Diameter x 3-1/2" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt	33.05	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-3.08*	
		For >100, Deduct	*-6.16*	
05 05 19 00-0018	EA	5/8" Diameter x 4-1/4" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt	33.14	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-3.08*	
		For >100, Deduct	*-6.16*	
05 05 19 00-0019	EA	5/8" Diameter x 5" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt	33.33	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-3.09*	
		For >100, Deduct	*-6.17*	
05 05 19 00-0020	EA	5/8" Diameter x 6" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt	33.69	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-3.09*	
		For >100, Deduct	*-6.19*	
05 05 19 00-0021	EA	5/8" Diameter x 7" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt	34.05	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-3.10*	
		For >100, Deduct	*-6.21*	
05 05 19 00-0022	EA	5/8" Diameter x 8-1/2" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt	36.93	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-3.18*	
		For >100, Deduct	*-6.35*	
05 05 19 00-0023	EA	5/8" Diameter x 10" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt	39.40	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-3.24*	
		For >100, Deduct	*-6.47*	
05 05 19 00-0024	EA	3/4" Diameter x 4-1/4" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt	39.73	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-3.67*	
		For >100, Deduct	*-7.35*	
05 05 19 00-0025	EA	3/4" Diameter x 4-3/4" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt	39.81	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-3.68*	
		For >100, Deduct	*-7.35*	
05 05 19 00-0026	EA	3/4" Diameter x 5-1/2" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt	40.25	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-3.69*	
		For >100, Deduct	*-7.37*	
05 05 19 00-0027	EA	3/4" Diameter x 6-1/4" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt	40.78	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-3.70*	
		For >100, Deduct	*-7.40*	
05 05 19 00-0028	EA	3/4" Diameter x 7" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt	41.38	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-3.72*	
		For >100, Deduct	*-7.43*	
05 05 19 00-0029	EA	3/4" Diameter x 8-1/2" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt	43.69	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-3.77*	
		For >100, Deduct	*-7.55*	
05 05 19 00-0030	EA	3/4" Diameter x 10" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt	46.75	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-3.85*	
		For >100, Deduct	*-7.70*	
05 05 19 00-0031	EA	3/4" Diameter x 12" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt	50.21	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-3.94*	
		For >100, Deduct	*-7.87*	
05 05 19 00-0032	EA	7/8" Diameter x 6" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt	50.19	
		For >10 To 50, Deduct	*-1.94*	
		For >50 To 100, Deduct	*-4.16*	
		For >100, Deduct	*-8.33*	
05 05 19 00-0033	EA	7/8" Diameter x 8" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt	52.01	
		For >10 To 50, Deduct	*-1.94*	
		For >50 To 100, Deduct	*-4.21*	
		For >100, Deduct	*-8.42*	
05 05 19 00-0034	EA	7/8" Diameter x 10" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt	54.42	
		For >10 To 50, Deduct	*-1.94*	
		For >50 To 100, Deduct	*-4.27*	
		For >100, Deduct	*-8.54*	
05 05 19 00-0035	EA	1" Diameter x 6" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt	62.88	
		For >10 To 50, Deduct	*-2.51*	
		For >50 To 100, Deduct	*-5.34*	
		For >100, Deduct	*-10.67*	
05 05 19 00-0036	EA	1" Diameter x 9" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt	66.30	
		For >10 To 50, Deduct	*-2.51*	
		For >50 To 100, Deduct	*-5.42*	
		For >100, Deduct	*-10.84*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 19 00-0037	EA	1" Diameter x 12" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt	69.70	
		For >10 To 50, Deduct	*-2.51*	
		For >50 To 100, Deduct	*-5.51*	
		For >100, Deduct	*-11.01*	
05 05 19 00-0038	EA	1-1/4" Diameter x 9" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt	81.53	
		For >10 To 50, Deduct	*-3.21*	
		For >50 To 100, Deduct	*-6.86*	
		For >100, Deduct	*-13.72*	
05 05 19 00-0039	EA	1-1/4" Diameter x 12" Length, Zinc Plated Steel, Wedge Anchor Expansion Bolt	83.98	
		For >10 To 50, Deduct	*-3.21*	
		For >50 To 100, Deduct	*-6.92*	
		For >100, Deduct	*-13.84*	

05 05 19 00-0040 304/18-8 Stainless Steel, Wedge Anchor Expansion Bolt *(05 05 19 00-0003)*

Note: Includes nut and washer.

05 05 19 00-0041	EA	1/4" Diameter x 1-3/4" Length, 304/18-8 Stainless Steel, Wedge Anchor Expansion Bolt	16.48	
		For >10 To 50, Deduct	*-0.70*	
		For >50 To 100, Deduct	*-1.47*	
		For >100, Deduct	*-2.93*	
05 05 19 00-0042	EA	1/4" Diameter x 2-1/4" Length, 304/18-8 Stainless Steel, Wedge Anchor Expansion Bolt	17.04	
		For >10 To 50, Deduct	*-0.70*	
		For >50 To 100, Deduct	*-1.48*	
		For >100, Deduct	*-2.96*	
05 05 19 00-0043	EA	1/4" Diameter x 3-1/4" Length, 304/18-8 Stainless Steel, Wedge Anchor Expansion Bolt	17.76	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.53*	
		For >100, Deduct	*-3.05*	
05 05 19 00-0044	EA	3/8" Diameter x 2-1/4" Length, 304/18-8 Stainless Steel, Wedge Anchor Expansion Bolt	21.17	
		For >10 To 50, Deduct	*-0.86*	
		For >50 To 100, Deduct	*-1.81*	
		For >100, Deduct	*-3.63*	
05 05 19 00-0045	EA	3/8" Diameter x 2-3/4" Length, 304/18-8 Stainless Steel, Wedge Anchor Expansion Bolt	21.65	
		For >10 To 50, Deduct	*-0.86*	
		For >50 To 100, Deduct	*-1.82*	
		For >100, Deduct	*-3.65*	
05 05 19 00-0046	EA	3/8" Diameter x 3" Length, 304/18-8 Stainless Steel, Wedge Anchor Expansion Bolt	22.00	
		For >10 To 50, Deduct	*-0.86*	
		For >50 To 100, Deduct	*-1.83*	
		For >100, Deduct	*-3.67*	
05 05 19 00-0047	EA	3/8" Diameter x 5" Length, 304/18-8 Stainless Steel, Wedge Anchor Expansion Bolt	24.62	
		For >10 To 50, Deduct	*-0.86*	
		For >50 To 100, Deduct	*-1.90*	
		For >100, Deduct	*-3.80*	
05 05 19 00-0048	EA	1/2" Diameter x 2-3/4" Length, 304/18-8 Stainless Steel, Wedge Anchor Expansion Bolt	32.83	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.65*	
		For >100, Deduct	*-5.29*	
05 05 19 00-0049	EA	1/2" Diameter x 3-3/4" Length, 304/18-8 Stainless Steel, Wedge Anchor Expansion Bolt	33.73	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.67*	
		For >100, Deduct	*-5.34*	
05 05 19 00-0050	EA	1/2" Diameter x 4-1/4" Length, 304/18-8 Stainless Steel, Wedge Anchor Expansion Bolt	34.26	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.68*	
		For >100, Deduct	*-5.36*	
05 05 19 00-0051	EA	1/2" Diameter x 5-1/2" Length, 304/18-8 Stainless Steel, Wedge Anchor Expansion Bolt	36.65	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.74*	
		For >100, Deduct	*-5.48*	
05 05 19 00-0052	EA	1/2" Diameter x 7" Length, 304/18-8 Stainless Steel, Wedge Anchor Expansion Bolt	40.24	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.83*	
		For >100, Deduct	*-5.66*	
05 05 19 00-0053	EA	5/8" Diameter x 3-1/2" Length, 304/18-8 Stainless Steel, Wedge Anchor Expansion Bolt	47.26	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-3.43*	
		For >100, Deduct	*-6.87*	
05 05 19 00-0054	EA	5/8" Diameter x 5" Length, 304/18-8 Stainless Steel, Wedge Anchor Expansion Bolt	49.59	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-3.49*	
		For >100, Deduct	*-6.98*	
05 05 19 00-0055	EA	5/8" Diameter x 6" Length, 304/18-8 Stainless Steel, Wedge Anchor Expansion Bolt	52.12	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-3.56*	
		For >100, Deduct	*-7.11*	
05 05 19 00-0056	EA	5/8" Diameter x 7" Length, 304/18-8 Stainless Steel, Wedge Anchor Expansion Bolt	55.48	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-3.64*	
		For >100, Deduct	*-7.28*	
05 05 19 00-0057	EA	5/8" Diameter x 8-1/2" Length, 304/18-8 Stainless Steel, Wedge Anchor Expansion Bolt	70.24	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-4.01*	
		For >100, Deduct	*-8.02*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 19 00-0058	EA	3/4" Diameter x 4-1/4" Length, 304/18-8 Stainless Steel, Wedge Anchor Expansion Bolt	56.42	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-4.09*	
		For >100, Deduct	*-8.18*	
05 05 19 00-0059	EA	3/4" Diameter x 4-3/4" Length, 304/18-8 Stainless Steel, Wedge Anchor Expansion Bolt	61.17	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-4.21*	
		For >100, Deduct	*-8.42*	
05 05 19 00-0060	EA	3/4" Diameter x 5-1/2" Length, 304/18-8 Stainless Steel, Wedge Anchor Expansion Bolt	65.23	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-4.31*	
		For >100, Deduct	*-8.62*	
05 05 19 00-0061	EA	3/4" Diameter x 6-1/4" Length, 304/18-8 Stainless Steel, Wedge Anchor Expansion Bolt	65.73	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-4.32*	
		For >100, Deduct	*-8.65*	
05 05 19 00-0062	EA	3/4" Diameter x 7" Length, 304/18-8 Stainless Steel, Wedge Anchor Expansion Bolt	69.53	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-4.42*	
		For >100, Deduct	*-8.84*	
05 05 19 00-0063	EA	3/4" Diameter x 8-1/2" Length, 304/18-8 Stainless Steel, Wedge Anchor Expansion Bolt	79.42	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-4.67*	
		For >100, Deduct	*-9.33*	
05 05 19 00-0064	EA	3/4" Diameter x 10" Length, 304/18-8 Stainless Steel, Wedge Anchor Expansion Bolt	93.36	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-5.01*	
		For >100, Deduct	*-10.03*	
05 05 19 00-0065	EA	7/8" Diameter x 8" Length, 304/18-8 Stainless Steel, Wedge Anchor Expansion Bolt	93.82	
		For >10 To 50, Deduct	*-1.94*	
		For >50 To 100, Deduct	*-5.25*	
		For >100, Deduct	*-10.51*	
05 05 19 00-0066	EA	1" Diameter x 6" Length, 304/18-8 Stainless Steel, Wedge Anchor Expansion Bolt	136.51	
		For >10 To 50, Deduct	*-2.51*	
		For >50 To 100, Deduct	*-7.18*	
		For >100, Deduct	*-14.35*	
05 05 19 00-0067	EA	1" Diameter x 9" Length, 304/18-8 Stainless Steel, Wedge Anchor Expansion Bolt	157.13	
		For >10 To 50, Deduct	*-2.51*	
		For >50 To 100, Deduct	*-7.69*	
		For >100, Deduct	*-15.39*	

05 05 19 00-0068 316 Stainless Steel, Wedge Anchor Expansion Bolt *(05 05 19 00-0003)*

Note: Includes nut and washer.

05 05 19 00-0069	EA	1/4" Diameter x 2-1/4" Length, 316 Stainless Steel, Wedge Anchor Expansion Bolt	16.97	
		For >10 To 50, Deduct	*-0.70*	
		For >50 To 100, Deduct	*-1.48*	
		For >100, Deduct	*-2.96*	
05 05 19 00-0070	EA	1/4" Diameter x 3-1/4" Length, 316 Stainless Steel, Wedge Anchor Expansion Bolt	17.97	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.53*	
		For >100, Deduct	*-3.06*	
05 05 19 00-0071	EA	3/8" Diameter x 2-1/4" Length, 316 Stainless Steel, Wedge Anchor Expansion Bolt	22.73	
		For >10 To 50, Deduct	*-0.86*	
		For >50 To 100, Deduct	*-1.85*	
		For >100, Deduct	*-3.70*	
05 05 19 00-0072	EA	3/8" Diameter x 2-3/4" Length, 316 Stainless Steel, Wedge Anchor Expansion Bolt	23.56	
		For >10 To 50, Deduct	*-0.86*	
		For >50 To 100, Deduct	*-1.87*	
		For >100, Deduct	*-3.74*	
05 05 19 00-0073	EA	3/8" Diameter x 3" Length, 316 Stainless Steel, Wedge Anchor Expansion Bolt	23.77	
		For >10 To 50, Deduct	*-0.86*	
		For >50 To 100, Deduct	*-1.88*	
		For >100, Deduct	*-3.76*	
05 05 19 00-0074	EA	3/8" Diameter x 5" Length, 316 Stainless Steel, Wedge Anchor Expansion Bolt	27.73	
		For >10 To 50, Deduct	*-0.86*	
		For >50 To 100, Deduct	*-1.98*	
		For >100, Deduct	*-3.95*	
05 05 19 00-0075	EA	1/2" Diameter x 2-3/4" Length, 316 Stainless Steel, Wedge Anchor Expansion Bolt	36.61	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.74*	
		For >100, Deduct	*-5.48*	
05 05 19 00-0076	EA	1/2" Diameter x 3-3/4" Length, 316 Stainless Steel, Wedge Anchor Expansion Bolt	38.91	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.80*	
		For >100, Deduct	*-5.60*	
05 05 19 00-0077	EA	1/2" Diameter x 4-1/4" Length, 316 Stainless Steel, Wedge Anchor Expansion Bolt	43.08	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.90*	
		For >100, Deduct	*-5.80*	
05 05 19 00-0078	EA	1/2" Diameter x 5-1/2" Length, 316 Stainless Steel, Wedge Anchor Expansion Bolt	44.12	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.93*	
		For >100, Deduct	*-5.86*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 19 00-0079	EA	5/8" Diameter x 5" Length, 316 Stainless Steel, Wedge Anchor Expansion Bolt	60.04	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-3.75*	
		For >100, Deduct	*-7.51*	
05 05 19 00-0080	EA	5/8" Diameter x 7" Length, 316 Stainless Steel, Wedge Anchor Expansion Bolt	61.29	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-3.78*	
		For >100, Deduct	*-7.57*	
05 05 19 00-0081	EA	3/4" Diameter x 4-3/4" Length, 316 Stainless Steel, Wedge Anchor Expansion Bolt	74.30	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-4.54*	
		For >100, Deduct	*-9.08*	
05 05 19 00-0082	EA	3/4" Diameter x 5-1/2" Length, 316 Stainless Steel, Wedge Anchor Expansion Bolt	79.52	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-4.67*	
		For >100, Deduct	*-9.34*	

05 05 19 00-0083 Hot Dipped Galvanized Steel, Wedge Anchor Expansion Bolt *(05 05 19 00-0003)*

Note: Includes nut and washer.

05 05 19 00-0084	EA	1/2" Diameter x 2-3/4" Length, Hot Dipped Galvanized Steel, Wedge Anchor Expansion Bolt	30.29	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.58*	
		For >100, Deduct	*-5.16*	
05 05 19 00-0085	EA	1/2" Diameter x 4-1/4" Length, Hot Dipped Galvanized Steel, Wedge Anchor Expansion Bolt	31.86	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.62*	
		For >100, Deduct	*-5.24*	
05 05 19 00-0086	EA	1/2" Diameter x 5-1/2" Length, Hot Dipped Galvanized Steel, Wedge Anchor Expansion Bolt	33.43	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.66*	
		For >100, Deduct	*-5.32*	
05 05 19 00-0087	EA	1/2" Diameter x 7" Length, Hot Dipped Galvanized Steel, Wedge Anchor Expansion Bolt	34.21	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.68*	
		For >100, Deduct	*-5.36*	
05 05 19 00-0088	EA	5/8" Diameter x 3-1/2" Length, Hot Dipped Galvanized Steel, Wedge Anchor Expansion Bolt	41.33	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-3.29*	
		For >100, Deduct	*-6.57*	
05 05 19 00-0089	EA	5/8" Diameter x 6" Length, Hot Dipped Galvanized Steel, Wedge Anchor Expansion Bolt	39.44	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-3.24*	
		For >100, Deduct	*-6.48*	
05 05 19 00-0090	EA	3/4" Diameter x 4-3/4" Length, Hot Dipped Galvanized Steel, Wedge Anchor Expansion Bolt	53.32	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-4.01*	
		For >100, Deduct	*-8.03*	
05 05 19 00-0091	EA	3/4" Diameter x 5-1/2" Length, Hot Dipped Galvanized Steel, Wedge Anchor Expansion Bolt	55.05	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-4.06*	
		For >100, Deduct	*-8.11*	
05 05 19 00-0092	EA	3/4" Diameter x 8-1/2" Length, Hot Dipped Galvanized Steel, Wedge Anchor Expansion Bolt	63.54	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-4.27*	
		For >100, Deduct	*-8.54*	
05 05 19 00-0093	EA	1" Diameter x 6" Length, Hot Dipped Galvanized Steel, Wedge Anchor Expansion Bolt	68.28	
		For >10 To 50, Deduct	*-2.51*	
		For >50 To 100, Deduct	*-5.47*	
		For >100, Deduct	*-10.94*	
05 05 19 00-0094	EA	1" Diameter x 9" Length, Hot Dipped Galvanized Steel, Wedge Anchor Expansion Bolt	73.16	
		For >10 To 50, Deduct	*-2.51*	
		For >50 To 100, Deduct	*-5.59*	
		For >100, Deduct	*-11.19*	
05 05 19 00-0095	EA	1" Diameter x 12" Length, Hot Dipped Galvanized Steel, Wedge Anchor Expansion Bolt	78.00	
		For >10 To 50, Deduct	*-2.51*	
		For >50 To 100, Deduct	*-5.71*	
		For >100, Deduct	*-11.43*	

05 05 19 00-0096 Concrete Sleeve Anchors *(05 05 19 00-0002)*

05 05 19 00-0097 Zinc Plated Steel, Concrete Sleeve Anchors *(05 05 19 00-0096)*

Note: Includes nut and washer.

05 05 19 00-0098	EA	1/4" Diameter x 5/8" Length, Zinc Plated Steel, Concrete Sleeve Anchor	14.81	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.45*	
		For >100, Deduct	*-2.90*	
05 05 19 00-0099	EA	1/4" Diameter x 1-3/8" Length, Zinc Plated Steel, Concrete Sleeve Anchor	14.94	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.45*	
		For >100, Deduct	*-2.90*	
05 05 19 00-0100	EA	1/4" Diameter x 2-1/4" Length, Zinc Plated Steel, Concrete Sleeve Anchor	15.10	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.46*	
		For >100, Deduct	*-2.91*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 19 00-0101	EA	5/16" Diameter x 1-1/2" Length, Zinc Plated Steel, Concrete Sleeve Anchor	15.59	
		For >10 To 50, Deduct	*-0.76*	
		For >50 To 100, Deduct	*-1.52*	
		For >100, Deduct	*-3.04*	
05 05 19 00-0102	EA	5/16" Diameter x 2-1/2" Length, Zinc Plated Steel, Concrete Sleeve Anchor	15.71	
		For >10 To 50, Deduct	*-0.76*	
		For >50 To 100, Deduct	*-1.53*	
		For >100, Deduct	*-3.05*	
05 05 19 00-0103	EA	3/8" Diameter x 1-7/8" Length, Zinc Plated Steel, Concrete Sleeve Anchor	17.66	
		For >10 To 50, Deduct	*-0.86*	
		For >50 To 100, Deduct	*-1.72*	
		For >100, Deduct	*-3.45*	
05 05 19 00-0104	EA	3/8" Diameter x 3" Length, Zinc Plated Steel, Concrete Sleeve Anchor	17.88	
		For >10 To 50, Deduct	*-0.86*	
		For >50 To 100, Deduct	*-1.73*	
		For >100, Deduct	*-3.46*	
05 05 19 00-0105	EA	3/8" Diameter x 4" Length, Zinc Plated Steel, Concrete Sleeve Anchor	18.09	
		For >10 To 50, Deduct	*-0.86*	
		For >50 To 100, Deduct	*-1.73*	
		For >100, Deduct	*-3.47*	
05 05 19 00-0106	EA	1/2" Diameter x 2-1/4" Length, Zinc Plated Steel, Concrete Sleeve Anchor	25.33	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.46*	
		For >100, Deduct	*-4.91*	
05 05 19 00-0107	EA	1/2" Diameter x 3" Length, Zinc Plated Steel, Concrete Sleeve Anchor	25.60	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.46*	
		For >100, Deduct	*-4.93*	
05 05 19 00-0108	EA	1/2" Diameter x 4" Length, Zinc Plated Steel, Concrete Sleeve Anchor	25.84	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.47*	
		For >100, Deduct	*-4.94*	
05 05 19 00-0109	EA	1/2" Diameter x 6" Length, Zinc Plated Steel, Concrete Sleeve Anchor	26.13	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.48*	
		For >100, Deduct	*-4.95*	
05 05 19 00-0110	EA	5/8" Diameter x 2-1/4" Length, Zinc Plated Steel, Concrete Sleeve Anchor	31.61	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-3.04*	
		For >100, Deduct	*-6.08*	
05 05 19 00-0111	EA	5/8" Diameter x 3" Length, Zinc Plated Steel, Concrete Sleeve Anchor	32.03	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-3.05*	
		For >100, Deduct	*-6.10*	
05 05 19 00-0112	EA	5/8" Diameter x 4-1/4" Length, Zinc Plated Steel, Concrete Sleeve Anchor	32.35	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-3.06*	
		For >100, Deduct	*-6.12*	
05 05 19 00-0113	EA	5/8" Diameter x 6" Length, Zinc Plated Steel, Concrete Sleeve Anchor	33.25	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-3.08*	
		For >100, Deduct	*-6.17*	
05 05 19 00-0114	EA	3/4" Diameter x 2-1/2" Length, Zinc Plated Steel, Concrete Sleeve Anchor	38.38	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-3.64*	
		For >100, Deduct	*-7.28*	
05 05 19 00-0115	EA	3/4" Diameter x 4-1/4" Length, Zinc Plated Steel, Concrete Sleeve Anchor	39.16	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-3.66*	
		For >100, Deduct	*-7.32*	
05 05 19 00-0116	EA	3/4" Diameter x 5-1/2" Length, Zinc Plated Steel, Concrete Sleeve Anchor	39.86	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-3.68*	
		For >100, Deduct	*-7.35*	
05 05 19 00-0117	EA	3/4" Diameter x 6-1/4" Length, Zinc Plated Steel, Concrete Sleeve Anchor	40.99	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-3.70*	
		For >100, Deduct	*-7.41*	

05 05 19 00-0118 304/18-8 Stainless Steel, Concrete Sleeve Anchors *(05 05 19 00-0096)*

Note: Includes nut and washer.

05 05 19 00-0119	EA	1/4" Diameter x 1-3/8" Length, 304/18-8 Stainless Steel, Concrete Sleeve Anchor	17.37	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.51*	
		For >100, Deduct	*-3.03*	
05 05 19 00-0120	EA	3/8" Diameter x 1-7/8" Length, 304/18-8 Stainless Steel, Concrete Sleeve Anchor	22.70	
		For >10 To 50, Deduct	*-0.86*	
		For >50 To 100, Deduct	*-1.85*	
		For >100, Deduct	*-3.70*	
05 05 19 00-0121	EA	3/8" Diameter x 3" Length, 304/18-8 Stainless Steel, Concrete Sleeve Anchor	24.92	
		For >10 To 50, Deduct	*-0.86*	
		For >50 To 100, Deduct	*-1.91*	
		For >100, Deduct	*-3.81*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 19 00-0122	EA	1/2" Diameter x 2-1/4" Length, 304/18-8 Stainless Steel, Concrete Sleeve Anchor	33.80	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.67*	
		For >100, Deduct	*-5.34*	
05 05 19 00-0123	EA	1/2" Diameter x 4" Length, 304/18-8 Stainless Steel, Concrete Sleeve Anchor	37.80	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.77*	
		For >100, Deduct	*-5.54*	
05 05 19 00-0124	EA	5/8" Diameter x 4-1/4" Length, 304/18-8 Stainless Steel, Concrete Sleeve Anchor	51.74	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-3.55*	
		For >100, Deduct	*-7.09*	

05 05 19 00-0125 Concrete Strike Anchors *(05 05 19 00-0002)*

Note: Includes nut and washer.

05 05 19 00-0126	EA	1/4" Diameter x 1-3/4" Length, Zinc Plated Steel, Concrete Strike Anchor	15.45	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.46*	
		For >100, Deduct	*-2.93*	
05 05 19 00-0127	EA	1/4" Diameter x 2-3/8" Length, Zinc Plated Steel, Concrete Strike Anchor	15.67	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.47*	
		For >100, Deduct	*-2.94*	
05 05 19 00-0128	EA	5/16" Diameter x 2-3/4" Length, Zinc Plated Steel, Concrete Strike Anchor	16.38	
		For >10 To 50, Deduct	*-0.76*	
		For >50 To 100, Deduct	*-1.54*	
		For >100, Deduct	*-3.08*	
05 05 19 00-0129	EA	5/16" Diameter x 4" Length, Zinc Plated Steel, Concrete Strike Anchor	17.29	
		For >10 To 50, Deduct	*-0.76*	
		For >50 To 100, Deduct	*-1.56*	
		For >100, Deduct	*-3.13*	
05 05 19 00-0130	EA	3/8" Diameter x 2-3/8" Length, Zinc Plated Steel, Concrete Strike Anchor	18.65	
		For >10 To 50, Deduct	*-0.86*	
		For >50 To 100, Deduct	*-1.75*	
		For >100, Deduct	*-3.50*	
05 05 19 00-0131	EA	3/8" Diameter x 3-1/2" Length, Zinc Plated Steel, Concrete Strike Anchor	19.34	
		For >10 To 50, Deduct	*-0.86*	
		For >50 To 100, Deduct	*-1.77*	
		For >100, Deduct	*-3.53*	
05 05 19 00-0132	EA	3/8" Diameter x 5" Length, Zinc Plated Steel, Concrete Strike Anchor	19.87	
		For >10 To 50, Deduct	*-0.86*	
		For >50 To 100, Deduct	*-1.78*	
		For >100, Deduct	*-3.56*	
05 05 19 00-0133	EA	1/2" Diameter x 2-3/4" Length, Zinc Plated Steel, Concrete Strike Anchor	27.02	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.50*	
		For >100, Deduct	*-5.00*	
05 05 19 00-0134	EA	1/2" Diameter x 3-1/2" Length, Zinc Plated Steel, Concrete Strike Anchor	27.43	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.51*	
		For >100, Deduct	*-5.02*	
05 05 19 00-0135	EA	1/2" Diameter x 4-3/4" Length, Zinc Plated Steel, Concrete Strike Anchor	28.63	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.54*	
		For >100, Deduct	*-5.08*	
05 05 19 00-0136	EA	1/2" Diameter x 6" Length, Zinc Plated Steel, Concrete Strike Anchor	30.19	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.58*	
		For >100, Deduct	*-5.15*	
05 05 19 00-0137	EA	5/8" Diameter x 4" Length, Zinc Plated Steel, Concrete Strike Anchor	35.21	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-3.13*	
		For >100, Deduct	*-6.26*	
05 05 19 00-0138	EA	5/8" Diameter x 4-3/4" Length, Zinc Plated Steel, Concrete Strike Anchor	36.64	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-3.17*	
		For >100, Deduct	*-6.34*	
05 05 19 00-0139	EA	5/8" Diameter x 6" Length, Zinc Plated Steel, Concrete Strike Anchor	37.91	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-3.20*	
		For >100, Deduct	*-6.40*	
05 05 19 00-0140	EA	3/4" Diameter x 5" Length, Zinc Plated Steel, Concrete Strike Anchor	44.36	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-3.79*	
		For >100, Deduct	*-7.58*	
05 05 19 00-0141	EA	3/4" Diameter x 6" Length, Zinc Plated Steel, Concrete Strike Anchor	45.70	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-3.82*	
		For >100, Deduct	*-7.64*	

05 05 19 00-0142 Multi-Set Drop-In Anchors *(05 05 19 00-0002)*

05 05 19 00-0143 Zinc Plated Steel, Multi-Set Drop-In Anchors *(05 05 19 00-0142)*

Note: Excludes bolt, nut and washer.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 19 00-0144	EA	1/4" Bolt Diameter, Zinc Plated Steel, Multi-Set Drop-In Anchor	20.58	
		For >10 To 50, Deduct	*-1.00*	
		For >50 To 100, Deduct	*-2.02*	
		For >100, Deduct	*-4.03*	
05 05 19 00-0145	EA	3/8" Bolt Diameter, Zinc Plated Steel, Multi-Set Drop-In Anchor	25.16	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.46*	
		For >100, Deduct	*-4.92*	
05 05 19 00-0146	EA	1/2" Bolt Diameter, Zinc Plated Steel, Multi-Set Drop-In Anchor	30.37	
		For >10 To 50, Deduct	*-1.44*	
		For >50 To 100, Deduct	*-2.92*	
		For >100, Deduct	*-5.83*	
05 05 19 00-0147	EA	5/8" Bolt Diameter, Zinc Plated Steel, Multi-Set Drop-In Anchor	34.12	
		For >10 To 50, Deduct	*-1.58*	
		For >50 To 100, Deduct	*-3.22*	
		For >100, Deduct	*-6.45*	
05 05 19 00-0148	EA	3/4" Bolt Diameter, Zinc Plated Steel, Multi-Set Drop-In Anchor	40.29	
		For >10 To 50, Deduct	*-1.80*	
		For >50 To 100, Deduct	*-3.70*	
		For >100, Deduct	*-7.41*	

05 05 19 00-0149 304/18-8 Stainless Steel, Multi-Set Drop-In Anchors *(05 05 19 00-0142)*

Note: Excludes bolt, nut and washer.

05 05 19 00-0150	EA	1/4" Bolt Diameter, 304/18-8 Stainless Steel, Multi-Set Drop-In Anchor	25.63	
		For >10 To 50, Deduct	*-1.00*	
		For >50 To 100, Deduct	*-2.14*	
		For >100, Deduct	*-4.28*	
05 05 19 00-0151	EA	3/8" Bolt Diameter, 304/18-8 Stainless Steel, Multi-Set Drop-In Anchor	34.47	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.69*	
		For >100, Deduct	*-5.39*	
05 05 19 00-0152	EA	1/2" Bolt Diameter, 304/18-8 Stainless Steel, Multi-Set Drop-In Anchor	43.06	
		For >10 To 50, Deduct	*-1.44*	
		For >50 To 100, Deduct	*-3.23*	
		For >100, Deduct	*-6.47*	
05 05 19 00-0153	EA	5/8" Bolt Diameter, 304/18-8 Stainless Steel, Multi-Set Drop-In Anchor	54.52	
		For >10 To 50, Deduct	*-1.58*	
		For >50 To 100, Deduct	*-3.73*	
		For >100, Deduct	*-7.47*	
05 05 19 00-0154	EA	3/4" Bolt Diameter, 304/18-8 Stainless Steel, Multi-Set Drop-In Anchor	75.35	
		For >10 To 50, Deduct	*-1.80*	
		For >50 To 100, Deduct	*-4.58*	
		For >100, Deduct	*-9.16*	

05 05 19 00-0155 Single Bolt Expansion Anchors *(05 05 19 00-0002)*

Note: Excludes bolt, nut and washer.

05 05 19 00-0156	EA	1/4" Bolt Diameter, Zinc Plated Steel, Single Bolt Expansion Anchor	15.00	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.45*	
		For >100, Deduct	*-2.91*	
05 05 19 00-0157	EA	5/16" Bolt Diameter, Zinc Plated Steel, Single Bolt Expansion Anchor	15.95	
		For >10 To 50, Deduct	*-0.76*	
		For >50 To 100, Deduct	*-1.53*	
		For >100, Deduct	*-3.06*	
05 05 19 00-0158	EA	3/8" Bolt Diameter, Zinc Plated Steel, Single Bolt Expansion Anchor	18.05	
		For >10 To 50, Deduct	*-0.86*	
		For >50 To 100, Deduct	*-1.73*	
		For >100, Deduct	*-3.47*	
05 05 19 00-0159	EA	1/2" Bolt Diameter, Zinc Plated Steel, Single Bolt Expansion Anchor	26.13	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.48*	
		For >100, Deduct	*-4.95*	
05 05 19 00-0160	EA	5/8" Bolt Diameter, Zinc Plated Steel, Single Bolt Expansion Anchor	35.04	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-3.13*	
		For >100, Deduct	*-6.26*	
05 05 19 00-0161	EA	3/4" Bolt Diameter, Zinc Plated Steel, Single Bolt Expansion Anchor	42.11	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-3.73*	
		For >100, Deduct	*-7.47*	

05 05 19 00-0162 Concrete Lag Shield Anchors *(05 05 19 00-0002)*

Note: Excludes lag bolt and washer.

05 05 19 00-0163	EA	1/4" Bolt Diameter, Zinc Plated Steel, Concrete Lag Shield Anchor	15.44	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.46*	
		For >100, Deduct	*-2.93*	
05 05 19 00-0164	EA	5/16" Bolt Diameter, Zinc Plated Steel, Concrete Lag Shield Anchor	18.37	
		For >10 To 50, Deduct	*-0.86*	
		For >50 To 100, Deduct	*-1.74*	
		For >100, Deduct	*-3.48*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 19 00-0165	EA	3/8" Bolt Diameter, Zinc Plated Steel, Concrete Lag Shield Anchor	19.22	
		For >10 To 50, Deduct	*-0.86*	
		For >50 To 100, Deduct	*-1.76*	
		For >100, Deduct	*-3.53*	
05 05 19 00-0166	EA	1/2" Bolt Diameter, Zinc Plated Steel, Concrete Lag Shield Anchor	27.08	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.50*	
		For >100, Deduct	*-5.00*	
05 05 19 00-0167	EA	5/8" Bolt Diameter, Zinc Plated Steel, Concrete Lag Shield Anchor	34.18	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-3.11*	
		For >100, Deduct	*-6.21*	
05 05 19 00-0168	EA	3/4" Bolt Diameter, Zinc Plated Steel, Concrete Lag Shield Anchor	39.01	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-3.66*	
		For >100, Deduct	*-7.31*	

05 05 19 00-0169 Chemical And Adhesive Anchors *(05 05 19 00-0001)*

05 05 19 00-0170 Chemically Adhered Anchor Rods *(05 05 19 00-0169)*

Note: Includes drilling hole, injected adhesive or pre-placed adhesive cartridge, nut and washer. Zinc coated carbon steel.

05 05 19 00-0171	EA	1/4" x 1-9/16" Long Chemically Adhered Anchor Rod	18.36	
		For >10 To 50, Deduct	*-0.79*	
		For >50 To 100, Deduct	*-1.65*	
		For >100, Deduct	*-3.29*	
05 05 19 00-0172	EA	5/16" x 2-3/8" Long Chemically Adhered Anchor Rod	20.96	
		For >10 To 50, Deduct	*-0.86*	
		For >50 To 100, Deduct	*-1.82*	
		For >100, Deduct	*-3.64*	
05 05 19 00-0173	EA	3/8" x 2-3/4" Long Chemically Adhered Anchor Rod	26.06	
		For >10 To 50, Deduct	*-1.08*	
		For >50 To 100, Deduct	*-2.27*	
		For >100, Deduct	*-4.54*	
05 05 19 00-0174	EA	1/2" x 3-11/16" Long Chemically Adhered Anchor Rod	30.23	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.58*	
		For >100, Deduct	*-5.16*	
05 05 19 00-0175	EA	1/2" x 5-1/2" Long Chemically Adhered Anchor Rod	31.58	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.61*	
		For >100, Deduct	*-5.22*	
05 05 19 00-0176	EA	5/8" x 7" Long Chemically Adhered Anchor Rod	39.06	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-3.23*	
		For >100, Deduct	*-6.46*	
05 05 19 00-0177	EA	3/4" x 9-1/2" Long Chemically Adhered Anchor Rod	49.73	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-3.92*	
		For >100, Deduct	*-7.85*	
05 05 19 00-0178	EA	7/8" x 10" Long Chemically Adhered Anchor Rod	57.83	
		For >10 To 50, Deduct	*-1.93*	
		For >50 To 100, Deduct	*-4.35*	
		For >100, Deduct	*-8.70*	
05 05 19 00-0179	EA	1" x 11-3/4" Long Chemically Adhered Anchor Rod	78.20	
		For >10 To 50, Deduct	*-2.51*	
		For >50 To 100, Deduct	*-5.72*	
		For >100, Deduct	*-11.44*	
05 05 19 00-0180	EA	1-1/4" x 14" Long Chemically Adhered Anchor Rod	109.55	
		For >10 To 50, Deduct	*-3.16*	
		For >50 To 100, Deduct	*-7.48*	
		For >100, Deduct	*-14.97*	

05 05 19 00-0181 Chemical Adhesives For Bolts, Dowels Or Threaded Rod *(05 05 19 00-0169)*

Note: Injected or drop in cartridge. Sizes listed are for the diameter of the bolt, dowel or rod to be anchored. Includes drilling. Drill a hole 1/16" to 1/4" larger that the diameter of the thread and a depth a minimum of 4-1/2 times the diameter of the bolt. Excludes bolt, dowel or rod.

05 05 19 00-0182	EA	1/4" Chemical Adhesive For Bolt Or Threaded Rod	16.13	
		For >10 To 50, Deduct	*-0.79*	
		For >50 To 100, Deduct	*-1.59*	
		For >100, Deduct	*-3.18*	
05 05 19 00-0183	EA	5/16" Chemical Adhesive For Bolt, Dowel Or Threaded Rod	17.65	
		For >10 To 50, Deduct	*-0.86*	
		For >50 To 100, Deduct	*-1.74*	
		For >100, Deduct	*-3.47*	
05 05 19 00-0184	EA	3/8" Chemical Adhesive For Bolt, Dowel Or Threaded Rod	20.65	
		For >10 To 50, Deduct	*-1.01*	
		For >50 To 100, Deduct	*-2.03*	
		For >100, Deduct	*-4.05*	
05 05 19 00-0185	EA	1/2" Chemical Adhesive For Bolt, Dowel Or Threaded Rod	25.04	
		For >10 To 50, Deduct	*-1.22*	
		For >50 To 100, Deduct	*-2.45*	
		For >100, Deduct	*-4.90*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 19 00-0186	EA	5/8" Chemical Adhesive For Bolt, Dowel Or Threaded Rod	27.83	
		For >10 To 50, Deduct	*-1.30*	
		For >50 To 100, Deduct	*-2.65*	
		For >100, Deduct	*-5.30*	
05 05 19 00-0187	EA	3/4" Chemical Adhesive For Bolt, Dowel Or Threaded Rod	35.07	
		For >10 To 50, Deduct	*-1.60*	
		For >50 To 100, Deduct	*-3.27*	
		For >100, Deduct	*-6.54*	
05 05 19 00-0188	EA	7/8" Chemical Adhesive For Bolt, Dowel Or Threaded Rod	38.41	
		For >10 To 50, Deduct	*-1.71*	
		For >50 To 100, Deduct	*-3.53*	
		For >100, Deduct	*-7.05*	
05 05 19 00-0189	EA	1" Chemical Adhesive For Bolt, Dowel Or Threaded Rod	47.56	
		For >10 To 50, Deduct	*-2.06*	
		For >50 To 100, Deduct	*-4.28*	
		For >100, Deduct	*-8.57*	
05 05 19 00-0190	EA	1-1/8" Chemical Adhesive For Bolt, Dowel Or Threaded Rod	52.46	
		For >10 To 50, Deduct	*-2.24*	
		For >50 To 100, Deduct	*-4.67*	
		For >100, Deduct	*-9.33*	
05 05 19 00-0191	EA	1-1/4" Chemical Adhesive For Bolt, Dowel Or Threaded Rod	60.68	
		For >10 To 50, Deduct	*-2.53*	
		For >50 To 100, Deduct	*-5.31*	
		For >100, Deduct	*-10.63*	
05 05 19 00-0192	EA	1-3/8" Chemical Adhesive For Bolt, Dowel Or Threaded Rod	67.79	
		For >10 To 50, Deduct	*-2.76*	
		For >50 To 100, Deduct	*-5.84*	
		For >100, Deduct	*-11.67*	
05 05 19 00-0193	EA	1-1/2" Chemical Adhesive For Bolt, Dowel Or Threaded Rod	76.87	
		For >10 To 50, Deduct	*-3.01*	
		For >50 To 100, Deduct	*-6.43*	
		For >100, Deduct	*-12.86*	
05 05 19 00-0194	EA	1-3/4" Chemical Adhesive For Bolt, Dowel Or Threaded Rod	95.74	
		For >10 To 50, Deduct	*-3.53*	
		For >50 To 100, Deduct	*-7.69*	
		For >100, Deduct	*-15.38*	
05 05 19 00-0195	EA	2" Chemical Adhesive For Bolt, Dowel Or Threaded Rod	135.56	
		For >10 To 50, Deduct	*-4.26*	
		For >50 To 100, Deduct	*-9.78*	
		For >100, Deduct	*-19.57*	

05 05 19 00-0196 Grout Concrete Anchor Bolt Or Threaded Rod *(05 05 19 00-0169)*

05 05 19 00-0197	EA	Grout Concrete Anchor Bolt or Threaded Rod	5.44	
		For >10 To 50, Deduct	*-0.26*	
		For >50 To 100, Deduct	*-0.53*	
		For >100, Deduct	*-1.07*	

05 05 19 00-0198 Other Concrete And Masonry Anchors *(05 05 19 00-0001)*

05 05 19 00-0199 Tapcon Masonry Screws *(05 05 19 00-0198)*

Note: Includes drilling. Countersunk or hex head.

05 05 19 00-0200	EA	3/16" x 1-1/4" Tapcon Masonry Screw	14.63	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.44*	
		For >100, Deduct	*-2.89*	
05 05 19 00-0201	EA	3/16" x 2-1/4" Tapcon Masonry Screw	14.70	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.45*	
		For >100, Deduct	*-2.89*	
05 05 19 00-0202	EA	3/16" x 3-1/4" Tapcon Masonry Screw	14.84	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.45*	
		For >100, Deduct	*-2.90*	
05 05 19 00-0203	EA	1/4" x 1-1/4" Tapcon Masonry Screw	14.71	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.45*	
		For >100, Deduct	*-2.89*	
05 05 19 00-0204	EA	1/4" x 2-1/4" Tapcon Masonry Screw	14.79	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.45*	
		For >100, Deduct	*-2.90*	
05 05 19 00-0205	EA	1/4" x 3-1/4" Tapcon Masonry Screw	14.96	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.45*	
		For >100, Deduct	*-2.91*	

05 05 19 00-0206 Large Diameter, Self-Threading Concrete Fasteners *(05 05 19 00-0198)*

Note: Includes drilling. Zinc plated.

05 05 19 00-0207	EA	3/8" x 1-3/4", Large Diameter, Self-Threading Concrete Fastener	16.54	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.49*	
		For >100, Deduct	*-2.98*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 19 00-0208	EA	3/8" x 2-1/2", Large Diameter, Self-Threading Concrete Fastener	17.32	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.51*	
		For >100, Deduct	*-3.02*	
05 05 19 00-0209	EA	3/8" x 3", Large Diameter, Self-Threading Concrete Fastener	17.53	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.52*	
		For >100, Deduct	*-3.03*	
05 05 19 00-0210	EA	3/8" x 4", Large Diameter, Self-Threading Concrete Fastener	17.91	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.53*	
		For >100, Deduct	*-3.05*	
05 05 19 00-0211	EA	3/8" x 5", Large Diameter, Self-Threading Concrete Fastener	18.23	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.53*	
		For >100, Deduct	*-3.07*	
05 05 19 00-0212	EA	1/2" x 3", Large Diameter, Self-Threading Concrete Fastener	18.91	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.55*	
		For >100, Deduct	*-3.10*	
05 05 19 00-0213	EA	1/2" x 4", Large Diameter, Self-Threading Concrete Fastener	19.74	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.57*	
		For >100, Deduct	*-3.14*	
05 05 19 00-0214	EA	1/2" x 5", Large Diameter, Self-Threading Concrete Fastener	20.51	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.59*	
		For >100, Deduct	*-3.18*	
05 05 19 00-0215	EA	1/2" x 6", Large Diameter, Self-Threading Concrete Fastener	22.66	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.65*	
		For >100, Deduct	*-3.29*	
05 05 19 00-0216	EA	5/8" x 3", Large Diameter, Self-Threading Concrete Fastener	22.92	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.65*	
		For >100, Deduct	*-3.30*	
05 05 19 00-0217	EA	5/8" x 4", Large Diameter, Self-Threading Concrete Fastener	24.23	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.68*	
		For >100, Deduct	*-3.37*	
05 05 19 00-0218	EA	5/8" x 5", Large Diameter, Self-Threading Concrete Fastener	25.58	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.72*	
		For >100, Deduct	*-3.44*	
05 05 19 00-0219	EA	5/8" x 6", Large Diameter, Self-Threading Concrete Fastener	26.45	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.74*	
		For >100, Deduct	*-3.48*	
05 05 19 00-0220	EA	3/4" x 4-1/2", Large Diameter, Self-Threading Concrete Fastener	26.06	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.73*	
		For >100, Deduct	*-3.46*	
05 05 19 00-0221	EA	3/4" x 5-1/2", Large Diameter, Self-Threading Concrete Fastener	27.31	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.76*	
		For >100, Deduct	*-3.52*	
05 05 19 00-0222	EA	3/4" x 6-1/4", Large Diameter, Self-Threading Concrete Fastener	30.23	
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.83*	
		For >100, Deduct	*-3.67*	

05 05 19 00-0223 Pin Bolt Drives *(05 05 19 00-0198)*

Note: Includes drilling. Zinc plated.

05 05 19 00-0224	EA	1/4" x 1" Pin Bolt Drive	9.00	
		For >10 To 50, Deduct	*-0.43*	
		For >50 To 100, Deduct	*-0.87*	
		For >100, Deduct	*-1.74*	
05 05 19 00-0225	EA	1/4" x 1-1/4" Pin Bolt Drive	9.00	
		For >10 To 50, Deduct	*-0.43*	
		For >50 To 100, Deduct	*-0.87*	
		For >100, Deduct	*-1.74*	
05 05 19 00-0226	EA	1/4" x 1-1/2" Pin Bolt Drive	9.06	
		For >10 To 50, Deduct	*-0.43*	
		For >50 To 100, Deduct	*-0.87*	
		For >100, Deduct	*-1.75*	
05 05 19 00-0227	EA	1/4" x 2" Pin Bolt Drive	9.07	
		For >10 To 50, Deduct	*-0.43*	
		For >50 To 100, Deduct	*-0.87*	
		For >100, Deduct	*-1.75*	

05 05 19 00-0228 Powder Actuated, Shot-In Place Anchors *(05 05 19 00-0198)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 19 00-0229	EA	0.15" Diameter x 1/2" Length, Stud Powder Actuated Anchor	2.18	
		For >10 To 50, Deduct	*-0.10*	
		For >50 To 100, Deduct	*-0.20*	
		For >100, Deduct	*-0.40*	
05 05 19 00-0230	EA	0.15" Diameter x 3/4" Length, Stud Powder Actuated Anchor	2.29	
		For >10 To 50, Deduct	*-0.10*	
		For >50 To 100, Deduct	*-0.21*	
		For >100, Deduct	*-0.42*	
05 05 19 00-0231	EA	0.15"/0.18" Diameter x 1" Length, Stud Powder Actuated Anchor	2.48	
		For >10 To 50, Deduct	*-0.11*	
		For >50 To 100, Deduct	*-0.22*	
		For >100, Deduct	*-0.45*	
05 05 19 00-0232	EA	0.15"/0.18" Diameter x 1-1/4" Length, Stud Powder Actuated Anchor	2.71	
		For >10 To 50, Deduct	*-0.12*	
		For >50 To 100, Deduct	*-0.24*	
		For >100, Deduct	*-0.48*	
05 05 19 00-0233	EA	0.15"/0.18" Diameter x 1-7/8" Length, Stud Powder Actuated Anchor	2.81	
		For >10 To 50, Deduct	*-0.12*	
		For >50 To 100, Deduct	*-0.24*	
		For >100, Deduct	*-0.49*	

05 05 19 00-0234 Powder Actuated, Shot-In Place Anchors With Exposed Thread *(05 05 19 00-0198)*

05 05 19 00-0235	EA	0.145" Diameter x 1" Long Shank, 3/4" Thread Length, 1/4" - 20 Treaded Stud Powder Actuated Anchor	2.49	
		For >10 To 50, Deduct	*-0.10*	
		For >50 To 100, Deduct	*-0.21*	
		For >100, Deduct	*-0.43*	
05 05 19 00-0236	EA	0.205" Diameter x 1-1/6" Long Shank, 1" Thread Length, 3/8" - 16 Treaded Stud Powder Actuated Anchor	3.27	
		For >10 To 50, Deduct	*-0.12*	
		For >50 To 100, Deduct	*-0.26*	
		For >100, Deduct	*-0.53*	

05 05 21 Fastening Methods for Metal *(05 05)*

05 05 21 00-0001 Welding *(05 05 21)*

05 05 21 00-0002 Minimum Charge For Welding *(05 05 21 00-0001)*

05 05 21 00-0003	EA	Minimum Charge For Welding Note: For projects where the total welding charge is less than the minimum charge, use this task exclusively. This task should not be used in conjunction with any other tasks in this section.	548.50	

05 05 21 00-0004 Spot Welding *(05 05 21 00-0001)*

See CSI section 05 05 21 00-0007 for a series of welds.

05 05 21 00-0005	EA	Up To 15 Spot Weldings, Welds Up To 1" Length Each	13.54	
		For Aluminum Welding, Add	*2.16*	
		For Stainless Steel Welding, Add	*3.55*	
05 05 21 00-0006	EA	>15 Spot Weldings, Welds Up To 1" Length Each	10.58	
		For Aluminum Welding, Add	*1.72*	
		For Stainless Steel Welding, Add	*2.81*	

05 05 21 00-0007 Field Welding (Seam And Stitch Welding) *(05 05 21 00-0001)*

05 05 21 00-0008 Vertical Fillet Welds *(05 05 21 00-0007)*

Note: For existing steel and moment connections. Includes tack welds for proper alignment until the final welds are made.

05 05 21 00-0009	LF	1/8" Vertical Fillet Weld	8.95	
		For Aluminum Welding, Add	*2.01*	
		For Stainless Steel Welding, Add	*3.07*	
		For Up To 25, Add	*2.86*	
		For >25 To 50, Add	*2.02*	
05 05 21 00-0010	LF	3/16" Vertical Fillet Weld	17.06	
		For Aluminum Welding, Add	*3.38*	
		For Stainless Steel Welding, Add	*5.29*	
		For Up To 25, Add	*5.63*	
		For >25 To 50, Add	*3.99*	
05 05 21 00-0011	LF	1/4" Vertical Fillet Weld	25.64	
		For Aluminum Welding, Add	*5.11*	
		For Stainless Steel Welding, Add	*7.99*	
		For Up To 25, Add	*8.45*	
		For >25 To 50, Add	*5.99*	
05 05 21 00-0012	LF	5/16" Vertical Fillet Weld	33.84	
		For Aluminum Welding, Add	*6.77*	
		For Stainless Steel Welding, Add	*10.58*	
		For Up To 25, Add	*11.14*	
		For >25 To 50, Add	*7.90*	
05 05 21 00-0013	LF	3/8" Vertical Fillet Weld	42.70	
		For Aluminum Welding, Add	*8.49*	
		For Stainless Steel Welding, Add	*13.28*	
		For Up To 25, Add	*14.08*	
		For >25 To 50, Add	*9.98*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 21 00-0014	LF	7/16" Vertical Fillet Weld	49.22	
		For Aluminum Welding, Add	*9.03*	
		For Stainless Steel Welding, Add	*14.37*	
		For Up To 25, Add	*16.54*	
		For >25 To 50, Add	*11.76*	
05 05 21 00-0015	LF	1/2" Vertical Fillet Weld	58.42	
		For Aluminum Welding, Add	*11.67*	
		For Stainless Steel Welding, Add	*18.24*	
		For Up To 25, Add	*19.24*	
		For >25 To 50, Add	*13.64*	
05 05 21 00-0016	LF	9/16" Vertical Fillet Weld	67.84	
		For Aluminum Welding, Add	*12.78*	
		For Stainless Steel Welding, Add	*20.22*	
		For Up To 25, Add	*22.66*	
		For >25 To 50, Add	*16.09*	
05 05 21 00-0017	LF	5/8" Vertical Fillet Weld	78.69	
		For Aluminum Welding, Add	*14.88*	
		For Stainless Steel Welding, Add	*23.52*	
		For Up To 25, Add	*26.26*	
		For >25 To 50, Add	*18.65*	
05 05 21 00-0018	LF	3/4" Vertical Fillet Weld	106.89	
		For Aluminum Welding, Add	*21.33*	
		For Stainless Steel Welding, Add	*33.34*	
		For Up To 25, Add	*35.21*	
		For >25 To 50, Add	*24.96*	
05 05 21 00-0019	LF	7/8" Vertical Fillet Weld	156.94	
		For Aluminum Welding, Add	*29.44*	
		For Stainless Steel Welding, Add	*46.61*	
		For Up To 25, Add	*52.47*	
		For >25 To 50, Add	*37.27*	
05 05 21 00-0020	LF	1" Vertical Fillet Weld	212.64	
		For Aluminum Welding, Add	*41.79*	
		For Stainless Steel Welding, Add	*65.53*	
		For Up To 25, Add	*70.30*	
		For >25 To 50, Add	*49.86*	

05 05 21 00-0021 Horizontal Or Flat Fillet Welds *(05 05 21 00-0007)*

Note: For existing steel and moment connections. Includes tack welds for proper alignment until the final welds are made.

05 05 21 00-0022	LF	1/8" Horizontal Or Flat Fillet Weld	7.60	
		For Aluminum Welding, Add	*1.81*	
		For Stainless Steel Welding, Add	*2.73*	
		For Up To 25, Add	*2.38*	
		For >25 To 50, Add	*1.68*	
05 05 21 00-0023	LF	3/16" Horizontal Or Flat Fillet Weld	14.57	
		For Aluminum Welding, Add	*3.06*	
		For Stainless Steel Welding, Add	*4.73*	
		For Up To 25, Add	*4.74*	
		For >25 To 50, Add	*3.35*	
05 05 21 00-0024	LF	1/4" Horizontal Or Flat Fillet Weld	21.78	
		For Aluminum Welding, Add	*4.57*	
		For Stainless Steel Welding, Add	*7.07*	
		For Up To 25, Add	*7.08*	
		For >25 To 50, Add	*5.01*	
05 05 21 00-0025	LF	5/16" Horizontal Or Flat Fillet Weld	28.83	
		For Aluminum Welding, Add	*6.10*	
		For Stainless Steel Welding, Add	*9.43*	
		For Up To 25, Add	*9.35*	
		For >25 To 50, Add	*6.62*	
05 05 21 00-0026	LF	3/8" Horizontal Or Flat Fillet Weld	36.35	
		For Aluminum Welding, Add	*7.62*	
		For Stainless Steel Welding, Add	*11.80*	
		For Up To 25, Add	*11.82*	
		For >25 To 50, Add	*8.36*	
05 05 21 00-0027	LF	7/16" Horizontal Or Flat Fillet Weld	41.63	
		For Aluminum Welding, Add	*7.98*	
		For Stainless Steel Welding, Add	*12.58*	
		For Up To 25, Add	*13.85*	
		For >25 To 50, Add	*9.83*	
05 05 21 00-0028	LF	1/2" Horizontal Or Flat Fillet Weld	49.68	
		For Aluminum Welding, Add	*10.49*	
		For Stainless Steel Welding, Add	*16.22*	
		For Up To 25, Add	*16.12*	
		For >25 To 50, Add	*11.41*	
05 05 21 00-0029	LF	9/16" Horizontal Or Flat Fillet Weld	57.59	
		For Aluminum Welding, Add	*11.42*	
		For Stainless Steel Welding, Add	*17.87*	
		For Up To 25, Add	*19.00*	
		For >25 To 50, Add	*13.47*	
05 05 21 00-0030	LF	5/8" Horizontal Or Flat Fillet Weld	67.30	
		For Aluminum Welding, Add	*13.70*	
		For Stainless Steel Welding, Add	*21.33*	
		For Up To 25, Add	*22.06*	
		For >25 To 50, Add	*15.63*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 21 00-0031	LF	3/4" Horizontal Or Flat Fillet Weld	91.03	
		For Aluminum Welding, Add	*19.21*	
		For Stainless Steel Welding, Add	*29.70*	
		For Up To 25, Add	*29.55*	
		For >25 To 50, Add	*20.91*	
05 05 21 00-0032	LF	7/8" Horizontal Or Flat Fillet Weld	131.77	
		For Aluminum Welding, Add	*25.27*	
		For Stainless Steel Welding, Add	*39.83*	
		For Up To 25, Add	*43.82*	
		For >25 To 50, Add	*31.11*	
05 05 21 00-0033	LF	1" Horizontal Or Flat Fillet Weld	180.33	
		For Aluminum Welding, Add	*37.42*	
		For Stainless Steel Welding, Add	*58.04*	
		For Up To 25, Add	*58.80*	
		For >25 To 50, Add	*41.63*	

05 05 23 Metal Fastenings *(05 05)*

05 05 23 00-0001 Hex Bolts *(05 05 23)*

Note: For owner furnished materials or where requested by the owner. Excludes drilling through wood, steel, concrete, brick or block. See CSI section 05 05 23 00-1567 for drilling through steel.

05 05 23 00-0002 A307B Heavy Hex Bolts *(05 05 23 00-0001)*

Note: Includes A307B heavy hex nut and two structural washers.

05 05 23 00-0003 Plain Finish A307B Heavy Hex Bolts *(05 05 23 00-0002)*

05 05 23 00-0004	EA	1/2" Diameter x 1-1/2" Long, Plain Finish A307B Heavy Hex Bolt	15.51	1.50
		For >10 To 50, Deduct	*-0.63*	
		For >50 To 100, Deduct	*-1.33*	
		For >100, Deduct	*-2.66*	
05 05 23 00-0005	EA	1/2" Diameter x 3" Long, Plain Finish A307B Heavy Hex Bolt	17.22	1.50
		For >10 To 50, Deduct	*-0.63*	
		For >50 To 100, Deduct	*-1.37*	
		For >100, Deduct	*-2.74*	
05 05 23 00-0006	EA	5/8" Diameter x 2" Long, Plain Finish A307B Heavy Hex Bolt	17.27	1.50
		For >10 To 50, Deduct	*-0.63*	
		For >50 To 100, Deduct	*-1.37*	
		For >100, Deduct	*-2.75*	
05 05 23 00-0007	EA	5/8" Diameter x 4" Long, Plain Finish A307B Heavy Hex Bolt	20.62	1.72
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.59*	
		For >100, Deduct	*-3.18*	
05 05 23 00-0008	EA	3/4" Diameter x 2" Long, Plain Finish A307B Heavy Hex Bolt	20.14	1.50
		For >10 To 50, Deduct	*-0.63*	
		For >50 To 100, Deduct	*-1.44*	
		For >100, Deduct	*-2.89*	
05 05 23 00-0009	EA	3/4" Diameter x 4" Long, Plain Finish A307B Heavy Hex Bolt	24.19	1.72
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.68*	
		For >100, Deduct	*-3.36*	
05 05 23 00-0010	EA	3/4" Diameter x 6" Long, Plain Finish A307B Heavy Hex Bolt	30.86	1.79
		For >10 To 50, Deduct	*-0.75*	
		For >50 To 100, Deduct	*-1.89*	
		For >100, Deduct	*-3.79*	
05 05 23 00-0011	EA	3/4" Diameter x 8" Long, Plain Finish A307B Heavy Hex Bolt	33.18	1.89
		For >10 To 50, Deduct	*-0.79*	
		For >50 To 100, Deduct	*-2.01*	
		For >100, Deduct	*-4.02*	
05 05 23 00-0012	EA	7/8" Diameter x 2" Long, Plain Finish A307B Heavy Hex Bolt	24.24	1.63
		For >10 To 50, Deduct	*-0.68*	
		For >50 To 100, Deduct	*-1.63*	
		For >100, Deduct	*-3.25*	
05 05 23 00-0013	EA	7/8" Diameter x 4" Long, Plain Finish A307B Heavy Hex Bolt	29.35	1.79
		For >10 To 50, Deduct	*-0.75*	
		For >50 To 100, Deduct	*-1.85*	
		For >100, Deduct	*-3.71*	
05 05 23 00-0014	EA	1" Diameter x 4" Long, Plain Finish A307B Heavy Hex Bolt	34.71	1.89
		For >10 To 50, Deduct	*-0.79*	
		For >50 To 100, Deduct	*-2.05*	
		For >100, Deduct	*-4.10*	
05 05 23 00-0015	EA	1" Diameter x 6" Long, Plain Finish A307B Heavy Hex Bolt	50.05	1.98
		For >10 To 50, Deduct	*-0.83*	
		For >50 To 100, Deduct	*-2.49*	
		For >100, Deduct	*-4.98*	
05 05 23 00-0016	EA	1-1/4" Diameter x 4" Long, Plain Finish A307B Heavy Hex Bolt	58.66	2.25
		For >10 To 50, Deduct	*-0.93*	
		For >50 To 100, Deduct	*-2.87*	
		For >100, Deduct	*-5.74*	
05 05 23 00-0017	EA	1-1/4" Diameter x 6" Long, Plain Finish A307B Heavy Hex Bolt	66.11	2.40
		For >10 To 50, Deduct	*-1.00*	
		For >50 To 100, Deduct	*-3.15*	
		For >100, Deduct	*-6.31*	

05 05 23 00-0018 Galvanized A307B Heavy Hex Bolts *(05 05 23 00-0002)*

copyright 2026 The Gordian Group, Inc.

	MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0019		EA	1/2" Diameter x 1-1/2" Long, Galvanized A307B Heavy Hex Bolt	16.35	1.50
			For >10 To 50, Deduct	*-0.63*	
			For >50 To 100, Deduct	*-1.35*	
			For >100, Deduct	*-2.70*	
05 05 23 00-0020		EA	1/2" Diameter x 3" Long, Galvanized A307B Heavy Hex Bolt	17.78	1.50
			For >10 To 50, Deduct	*-0.63*	
			For >50 To 100, Deduct	*-1.39*	
			For >100, Deduct	*-2.77*	
05 05 23 00-0021		EA	5/8" Diameter x 2" Long, Galvanized A307B Heavy Hex Bolt	19.34	1.50
			For >10 To 50, Deduct	*-0.63*	
			For >50 To 100, Deduct	*-1.42*	
			For >100, Deduct	*-2.85*	
05 05 23 00-0022		EA	5/8" Diameter x 4" Long, Galvanized A307B Heavy Hex Bolt	22.69	1.72
			For >10 To 50, Deduct	*-0.72*	
			For >50 To 100, Deduct	*-1.64*	
			For >100, Deduct	*-3.28*	
05 05 23 00-0023		EA	3/4" Diameter x 2" Long, Galvanized A307B Heavy Hex Bolt	22.49	1.50
			For >10 To 50, Deduct	*-0.63*	
			For >50 To 100, Deduct	*-1.50*	
			For >100, Deduct	*-3.01*	
05 05 23 00-0024		EA	3/4" Diameter x 4" Long, Galvanized A307B Heavy Hex Bolt	28.54	1.72
			For >10 To 50, Deduct	*-0.72*	
			For >50 To 100, Deduct	*-1.79*	
			For >100, Deduct	*-3.58*	
05 05 23 00-0025		EA	3/4" Diameter x 6" Long, Galvanized A307B Heavy Hex Bolt	38.35	1.79
			For >10 To 50, Deduct	*-0.75*	
			For >50 To 100, Deduct	*-2.08*	
			For >100, Deduct	*-4.16*	
05 05 23 00-0026		EA	3/4" Diameter x 8" Long, Galvanized A307B Heavy Hex Bolt	45.30	1.89
			For >10 To 50, Deduct	*-0.79*	
			For >50 To 100, Deduct	*-2.31*	
			For >100, Deduct	*-4.63*	
05 05 23 00-0027		EA	7/8" Diameter x 2" Long, Galvanized A307B Heavy Hex Bolt	30.40	1.63
			For >10 To 50, Deduct	*-0.68*	
			For >50 To 100, Deduct	*-1.78*	
			For >100, Deduct	*-3.56*	
05 05 23 00-0028		EA	7/8" Diameter x 4" Long, Galvanized A307B Heavy Hex Bolt	36.29	1.79
			For >10 To 50, Deduct	*-0.75*	
			For >50 To 100, Deduct	*-2.03*	
			For >100, Deduct	*-4.06*	
05 05 23 00-0029		EA	1" Diameter x 4" Long, Galvanized A307B Heavy Hex Bolt	43.66	1.89
			For >10 To 50, Deduct	*-0.79*	
			For >50 To 100, Deduct	*-2.27*	
			For >100, Deduct	*-4.55*	
05 05 23 00-0030		EA	1" Diameter x 6" Long, Galvanized A307B Heavy Hex Bolt	66.28	1.98
			For >10 To 50, Deduct	*-0.83*	
			For >50 To 100, Deduct	*-2.90*	
			For >100, Deduct	*-5.80*	
05 05 23 00-0031		EA	1-1/4" Diameter x 4" Long, Galvanized A307B Heavy Hex Bolt	65.92	2.25
			For >10 To 50, Deduct	*-0.93*	
			For >50 To 100, Deduct	*-3.05*	
			For >100, Deduct	*-6.10*	
05 05 23 00-0032		EA	1-1/4" Diameter x 6" Long, Galvanized A307B Heavy Hex Bolt	82.93	2.40
			For >10 To 50, Deduct	*-1.00*	
			For >50 To 100, Deduct	*-3.57*	
			For >100, Deduct	*-7.15*	

05 05 23 00-0033 A325 High Strength Structural Bolts *(05 05 23 00-0001)*

05 05 23 00-0034 Plain Finish A325 High Strength Structural Bolts *(05 05 23 00-0033)*

Note: Includes A325 heavy hex nut and structural washer.

05 05 23 00-0035		EA	1/2" Diameter x 1-1/2" Long, Plain Finish A325 High Strength Structural Bolt	15.12	1.50
			For >10 To 50, Deduct	*-0.63*	
			For >50 To 100, Deduct	*-1.32*	
			For >100, Deduct	*-2.64*	
05 05 23 00-0036		EA	1/2" Diameter x 3" Long, Plain Finish A325 High Strength Structural Bolt	15.49	1.50
			For >10 To 50, Deduct	*-0.63*	
			For >50 To 100, Deduct	*-1.33*	
			For >100, Deduct	*-2.66*	
05 05 23 00-0037		EA	5/8" Diameter x 2" Long, Plain Finish A325 High Strength Structural Bolt	16.70	1.50
			For >10 To 50, Deduct	*-0.63*	
			For >50 To 100, Deduct	*-1.36*	
			For >100, Deduct	*-2.72*	
05 05 23 00-0038		EA	5/8" Diameter x 4" Long, Plain Finish A325 High Strength Structural Bolt	20.65	1.72
			For >10 To 50, Deduct	*-0.72*	
			For >50 To 100, Deduct	*-1.59*	
			For >100, Deduct	*-3.18*	
05 05 23 00-0039		EA	5/8" Diameter x 6" Long, Plain Finish A325 High Strength Structural Bolt	24.17	1.79
			For >10 To 50, Deduct	*-0.75*	
			For >50 To 100, Deduct	*-1.73*	
			For >100, Deduct	*-3.45*	
05 05 23 00-0040		EA	3/4" Diameter x 2" Long, Plain Finish A325 High Strength Structural Bolt	18.38	1.50
			For >10 To 50, Deduct	*-0.63*	
			For >50 To 100, Deduct	*-1.40*	
			For >100, Deduct	*-2.80*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0041	EA	3/4" Diameter x 4" Long, Plain Finish A325 High Strength Structural Bolt	22.45	1.72
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.64*	
		For >100, Deduct	*-3.27*	
05 05 23 00-0042	EA	3/4" Diameter x 6" Long, Plain Finish A325 High Strength Structural Bolt	25.75	1.79
		For >10 To 50, Deduct	*-0.75*	
		For >50 To 100, Deduct	*-1.77*	
		For >100, Deduct	*-3.53*	
05 05 23 00-0043	EA	3/4" Diameter x 8" Long, Plain Finish A325 High Strength Structural Bolt	32.11	1.89
		For >10 To 50, Deduct	*-0.79*	
		For >50 To 100, Deduct	*-1.98*	
		For >100, Deduct	*-3.97*	
05 05 23 00-0044	EA	7/8" Diameter x 2" Long, Plain Finish A325 High Strength Structural Bolt	21.48	1.63
		For >10 To 50, Deduct	*-0.68*	
		For >50 To 100, Deduct	*-1.56*	
		For >100, Deduct	*-3.12*	
05 05 23 00-0045	EA	7/8" Diameter x 4" Long, Plain Finish A325 High Strength Structural Bolt	26.41	1.79
		For >10 To 50, Deduct	*-0.75*	
		For >50 To 100, Deduct	*-1.78*	
		For >100, Deduct	*-3.56*	
05 05 23 00-0046	EA	7/8" Diameter x 6" Long, Plain Finish A325 High Strength Structural Bolt	30.37	1.89
		For >10 To 50, Deduct	*-0.79*	
		For >50 To 100, Deduct	*-1.94*	
		For >100, Deduct	*-3.88*	
05 05 23 00-0047	EA	7/8" Diameter x 8" Long, Plain Finish A325 High Strength Structural Bolt	32.98	1.98
		For >10 To 50, Deduct	*-0.83*	
		For >50 To 100, Deduct	*-2.07*	
		For >100, Deduct	*-4.13*	
05 05 23 00-0048	EA	1" Diameter x 2" Long, Plain Finish A325 High Strength Structural Bolt	23.88	1.69
		For >10 To 50, Deduct	*-0.71*	
		For >50 To 100, Deduct	*-1.66*	
		For >100, Deduct	*-3.32*	
05 05 23 00-0049	EA	1" Diameter x 4" Long, Plain Finish A325 High Strength Structural Bolt	28.94	1.89
		For >10 To 50, Deduct	*-0.79*	
		For >50 To 100, Deduct	*-1.90*	
		For >100, Deduct	*-3.81*	
05 05 23 00-0050	EA	1" Diameter x 6" Long, Plain Finish A325 High Strength Structural Bolt	33.79	1.98
		For >10 To 50, Deduct	*-0.83*	
		For >50 To 100, Deduct	*-2.09*	
		For >100, Deduct	*-4.17*	
05 05 23 00-0051	EA	1" Diameter x 8" Long, Plain Finish A325 High Strength Structural Bolt	43.84	2.11
		For >10 To 50, Deduct	*-0.88*	
		For >50 To 100, Deduct	*-2.42*	
		For >100, Deduct	*-4.83*	
05 05 23 00-0052	EA	1-1/4" Diameter x 3" Long, Plain Finish A325 High Strength Structural Bolt	41.73	2.11
		For >10 To 50, Deduct	*-0.88*	
		For >50 To 100, Deduct	*-2.36*	
		For >100, Deduct	*-4.73*	
05 05 23 00-0053	EA	1-1/4" Diameter x 4" Long, Plain Finish A325 High Strength Structural Bolt	47.50	2.25
		For >10 To 50, Deduct	*-0.93*	
		For >50 To 100, Deduct	*-2.59*	
		For >100, Deduct	*-5.18*	
05 05 23 00-0054	EA	1-1/4" Diameter x 6" Long, Plain Finish A325 High Strength Structural Bolt	56.07	2.40
		For >10 To 50, Deduct	*-1.00*	
		For >50 To 100, Deduct	*-2.90*	
		For >100, Deduct	*-5.81*	
05 05 23 00-0055	EA	1-1/4" Diameter x 8" Long, Plain Finish A325 High Strength Structural Bolt	66.18	2.57
		For >10 To 50, Deduct	*-1.07*	
		For >50 To 100, Deduct	*-3.26*	
		For >100, Deduct	*-6.51*	

05 05 23 00-0056 Galvanized A325 High Strength Structural Bolts *(05 05 23 00-0033)*

Note: Includes A325 heavy hex nut and structural washer.

05 05 23 00-0057	EA	1/2" Diameter x 1-1/2" Long, Galvanized A325 High Strength Structural Bolt	15.87	1.50
		For >10 To 50, Deduct	*-0.63*	
		For >50 To 100, Deduct	*-1.34*	
		For >100, Deduct	*-2.68*	
05 05 23 00-0058	EA	1/2" Diameter x 3" Long, Galvanized A325 High Strength Structural Bolt	16.14	1.50
		For >10 To 50, Deduct	*-0.63*	
		For >50 To 100, Deduct	*-1.34*	
		For >100, Deduct	*-2.69*	
05 05 23 00-0059	EA	5/8" Diameter x 2" Long, Galvanized A325 High Strength Structural Bolt	18.29	1.50
		For >10 To 50, Deduct	*-0.63*	
		For >50 To 100, Deduct	*-1.40*	
		For >100, Deduct	*-2.80*	
05 05 23 00-0060	EA	5/8" Diameter x 4" Long, Galvanized A325 High Strength Structural Bolt	21.79	1.72
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.62*	
		For >100, Deduct	*-3.24*	
05 05 23 00-0061	EA	5/8" Diameter x 6" Long, Galvanized A325 High Strength Structural Bolt	23.09	1.79
		For >10 To 50, Deduct	*-0.75*	
		For >50 To 100, Deduct	*-1.70*	
		For >100, Deduct	*-3.40*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0062	EA	3/4" Diameter x 2" Long, Galvanized A325 High Strength Structural Bolt	19.11	1.50
		For >10 To 50, Deduct	*-0.63*	
		For >50 To 100, Deduct	*-1.42*	
		For >100, Deduct	*-2.84*	
05 05 23 00-0063	EA	3/4" Diameter x 4" Long, Galvanized A325 High Strength Structural Bolt	23.37	1.72
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.66*	
		For >100, Deduct	*-3.32*	
05 05 23 00-0064	EA	3/4" Diameter x 6" Long, Galvanized A325 High Strength Structural Bolt	27.19	1.79
		For >10 To 50, Deduct	*-0.75*	
		For >50 To 100, Deduct	*-1.80*	
		For >100, Deduct	*-3.61*	
05 05 23 00-0065	EA	3/4" Diameter x 8" Long, Galvanized A325 High Strength Structural Bolt	35.51	1.89
		For >10 To 50, Deduct	*-0.79*	
		For >50 To 100, Deduct	*-2.07*	
		For >100, Deduct	*-4.14*	
05 05 23 00-0066	EA	7/8" Diameter x 2" Long, Galvanized A325 High Strength Structural Bolt	25.88	1.63
		For >10 To 50, Deduct	*-0.68*	
		For >50 To 100, Deduct	*-1.67*	
		For >100, Deduct	*-3.34*	
05 05 23 00-0067	EA	7/8" Diameter x 4" Long, Galvanized A325 High Strength Structural Bolt	29.01	1.79
		For >10 To 50, Deduct	*-0.75*	
		For >50 To 100, Deduct	*-1.85*	
		For >100, Deduct	*-3.69*	
05 05 23 00-0068	EA	7/8" Diameter x 6" Long, Galvanized A325 High Strength Structural Bolt	33.52	1.89
		For >10 To 50, Deduct	*-0.79*	
		For >50 To 100, Deduct	*-2.02*	
		For >100, Deduct	*-4.04*	
05 05 23 00-0069	EA	7/8" Diameter x 8" Long, Galvanized A325 High Strength Structural Bolt	42.43	1.98
		For >10 To 50, Deduct	*-0.83*	
		For >50 To 100, Deduct	*-2.30*	
		For >100, Deduct	*-4.60*	
05 05 23 00-0070	EA	1" Diameter x 2" Long, Galvanized A325 High Strength Structural Bolt	27.30	1.69
		For >10 To 50, Deduct	*-0.71*	
		For >50 To 100, Deduct	*-1.74*	
		For >100, Deduct	*-3.49*	
05 05 23 00-0071	EA	1" Diameter x 4" Long, Galvanized A325 High Strength Structural Bolt	36.78	1.89
		For >10 To 50, Deduct	*-0.79*	
		For >50 To 100, Deduct	*-2.10*	
		For >100, Deduct	*-4.20*	
05 05 23 00-0072	EA	1" Diameter x 6" Long, Galvanized A325 High Strength Structural Bolt	40.35	1.98
		For >10 To 50, Deduct	*-0.83*	
		For >50 To 100, Deduct	*-2.25*	
		For >100, Deduct	*-4.50*	
05 05 23 00-0073	EA	1" Diameter x 8" Long, Galvanized A325 High Strength Structural Bolt	51.93	2.11
		For >10 To 50, Deduct	*-0.88*	
		For >50 To 100, Deduct	*-2.62*	
		For >100, Deduct	*-5.24*	
05 05 23 00-0074	EA	1-1/4" Diameter x 3" Long, Galvanized A325 High Strength Structural Bolt	51.60	2.11
		For >10 To 50, Deduct	*-0.88*	
		For >50 To 100, Deduct	*-2.61*	
		For >100, Deduct	*-5.22*	
05 05 23 00-0075	EA	1-1/4" Diameter x 4" Long, Galvanized A325 High Strength Structural Bolt	55.04	2.25
		For >10 To 50, Deduct	*-0.93*	
		For >50 To 100, Deduct	*-2.78*	
		For >100, Deduct	*-5.55*	
05 05 23 00-0076	EA	1-1/4" Diameter x 6" Long, Galvanized A325 High Strength Structural Bolt	64.71	2.40
		For >10 To 50, Deduct	*-1.00*	
		For >50 To 100, Deduct	*-3.12*	
		For >100, Deduct	*-6.24*	
05 05 23 00-0077	EA	1-1/4" Diameter x 8" Long, Galvanized A325 High Strength Structural Bolt	75.20	2.57
		For >10 To 50, Deduct	*-1.07*	
		For >50 To 100, Deduct	*-3.48*	
		For >100, Deduct	*-6.96*	

05 05 23 00-0078 A490 High Strength Structural Bolts *(05 05 23 00-0001)*

Note: Includes A490 heavy hex nut and two structural washers.

05 05 23 00-0079 Plain Finish A490 High Strength Structural Bolts *(05 05 23 00-0078)*

05 05 23 00-0080	EA	5/8" Diameter x 2" Long, Plain Finish A490 High Strength Structural Bolt	17.30	1.50
		For >10 To 50, Deduct	*-0.63*	
		For >50 To 100, Deduct	*-1.37*	
		For >100, Deduct	*-2.75*	
05 05 23 00-0081	EA	5/8" Diameter x 4" Long, Plain Finish A490 High Strength Structural Bolt	24.75	1.72
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.69*	
		For >100, Deduct	*-3.39*	
05 05 23 00-0082	EA	5/8" Diameter x 6" Long, Plain Finish A490 High Strength Structural Bolt	26.53	1.79
		For >10 To 50, Deduct	*-0.75*	
		For >50 To 100, Deduct	*-1.79*	
		For >100, Deduct	*-3.57*	
05 05 23 00-0083	EA	3/4" Diameter x 2" Long, Plain Finish A490 High Strength Structural Bolt	19.62	1.50
		For >10 To 50, Deduct	*-0.63*	
		For >50 To 100, Deduct	*-1.43*	
		For >100, Deduct	*-2.86*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0084	EA	3/4" Diameter x 4" Long, Plain Finish A490 High Strength Structural Bolt	23.86	1.72
		For >10 To 50, Deduct	*-0.72*	
		For >50 To 100, Deduct	*-1.67*	
		For >100, Deduct	*-3.34*	
05 05 23 00-0085	EA	3/4" Diameter x 6" Long, Plain Finish A490 High Strength Structural Bolt	28.03	1.79
		For >10 To 50, Deduct	*-0.75*	
		For >50 To 100, Deduct	*-1.82*	
		For >100, Deduct	*-3.65*	
05 05 23 00-0086	EA	3/4" Diameter x 8" Long, Plain Finish A490 High Strength Structural Bolt	36.54	1.89
		For >10 To 50, Deduct	*-0.79*	
		For >50 To 100, Deduct	*-2.09*	
		For >100, Deduct	*-4.19*	
05 05 23 00-0087	EA	7/8" Diameter x 2" Long, Plain Finish A490 High Strength Structural Bolt	22.91	1.63
		For >10 To 50, Deduct	*-0.68*	
		For >50 To 100, Deduct	*-1.59*	
		For >100, Deduct	*-3.19*	
05 05 23 00-0088	EA	7/8" Diameter x 4" Long, Plain Finish A490 High Strength Structural Bolt	26.87	1.79
		For >10 To 50, Deduct	*-0.75*	
		For >50 To 100, Deduct	*-1.79*	
		For >100, Deduct	*-3.58*	
05 05 23 00-0089	EA	7/8" Diameter x 6" Long, Plain Finish A490 High Strength Structural Bolt	39.62	1.89
		For >10 To 50, Deduct	*-0.79*	
		For >50 To 100, Deduct	*-2.17*	
		For >100, Deduct	*-4.34*	
05 05 23 00-0090	EA	1" Diameter x 2" Long, Plain Finish A490 High Strength Structural Bolt	27.23	1.69
		For >10 To 50, Deduct	*-0.71*	
		For >50 To 100, Deduct	*-1.74*	
		For >100, Deduct	*-3.48*	
05 05 23 00-0091	EA	1" Diameter x 4" Long, Plain Finish A490 High Strength Structural Bolt	32.70	1.89
		For >10 To 50, Deduct	*-0.79*	
		For >50 To 100, Deduct	*-2.00*	
		For >100, Deduct	*-4.00*	
05 05 23 00-0092	EA	1" Diameter x 6" Long, Plain Finish A490 High Strength Structural Bolt	37.82	1.98
		For >10 To 50, Deduct	*-0.83*	
		For >50 To 100, Deduct	*-2.19*	
		For >100, Deduct	*-4.37*	
05 05 23 00-0093	EA	1-1/4" Diameter x 3" Long, Plain Finish A490 High Strength Structural Bolt	47.70	2.11
		For >10 To 50, Deduct	*-0.88*	
		For >50 To 100, Deduct	*-2.51*	
		For >100, Deduct	*-5.03*	
05 05 23 00-0094	EA	1-1/4" Diameter x 4" Long, Plain Finish A490 High Strength Structural Bolt	61.75	2.25
		For >10 To 50, Deduct	*-0.93*	
		For >50 To 100, Deduct	*-2.94*	
		For >100, Deduct	*-5.89*	
05 05 23 00-0095	EA	1-1/4" Diameter x 6" Long, Plain Finish A490 High Strength Structural Bolt	64.95	2.40
		For >10 To 50, Deduct	*-1.00*	
		For >50 To 100, Deduct	*-3.13*	
		For >100, Deduct	*-6.25*	
05 05 23 00-0096	EA	1-1/4" Diameter x 8" Long, Plain Finish A490 High Strength Structural Bolt	67.70	2.57
		For >10 To 50, Deduct	*-1.07*	
		For >50 To 100, Deduct	*-3.29*	
		For >100, Deduct	*-6.59*	

05 05 23 00-0097 Hex Head Bolts *(05 05 23 00-0001)*

05 05 23 00-0098 Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolts *(05 05 23 00-0097)*

05 05 23 00-0099 1/4" Diameter, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolts *(05 05 23 00-0098)*

05 05 23 00-0100	EA	1/4" Diameter x 1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	9.13	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0101	EA	1/4" Diameter x 1" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	9.16	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0102	EA	1/4" Diameter x 1-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	9.26	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0103	EA	1/4" Diameter x 2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	9.31	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0104	EA	1/4" Diameter x 2-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	9.63	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0105	EA	1/4" Diameter x 3" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	9.67	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0106	EA	1/4" Diameter x 3-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	9.81	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0107	EA	1/4" Diameter x 4" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	10.08	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0108	EA	1/4" Diameter x 4-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	10.13	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0109	EA	1/4" Diameter x 5" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	10.35	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0110	EA	1/4" Diameter x 5-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	10.78	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0111	EA	1/4" Diameter x 6" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	10.95	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0112	EA	1/4" Diameter x 6-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	11.18	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0113	EA	1/4" Diameter x 7" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	11.94	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-0114	EA	1/4" Diameter x 7-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	12.30	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-0115	EA	1/4" Diameter x 8" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	12.39	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	

05 05 23 00-0116 5/16" Diameter, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolts *(05 05 23 00-0098)*

05 05 23 00-0117	EA	5/16" Diameter x 1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	9.22	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0118	EA	5/16" Diameter x 1" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	9.25	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0119	EA	5/16" Diameter x 1-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	9.33	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0120	EA	5/16" Diameter x 2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	9.39	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0121	EA	5/16" Diameter x 2-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	9.73	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0122	EA	5/16" Diameter x 3" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	9.88	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0123	EA	5/16" Diameter x 3-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	9.94	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0124	EA	5/16" Diameter x 4" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	10.34	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0125	EA	5/16" Diameter x 4-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	10.56	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0126	EA	5/16" Diameter x 5" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	10.64	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0127	EA	5/16" Diameter x 5-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	10.97	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0128	EA	5/16" Diameter x 6" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	11.05	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0129	EA	5/16" Diameter x 6-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	11.88	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0130	EA	5/16" Diameter x 7" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	12.53	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-0131	EA	5/16" Diameter x 7-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	12.90	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-0132	EA	5/16" Diameter x 8" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	13.23	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	

05 05 23 00-0133 3/8" Diameter, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolts *(05 05 23 00-0098)*

05 05 23 00-0134	EA	3/8" Diameter x 1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	9.31	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0135	EA	3/8" Diameter x 1" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	9.35	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0136	EA	3/8" Diameter x 1-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	9.46	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0137	EA	3/8" Diameter x 2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	9.57	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0138	EA	3/8" Diameter x 2-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	9.92	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0139	EA	3/8" Diameter x 3" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	10.11	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0140	EA	3/8" Diameter x 3-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	10.30	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0141	EA	3/8" Diameter x 4" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	10.74	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0142	EA	3/8" Diameter x 4-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	10.99	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0143	EA	3/8" Diameter x 5" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	11.13	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0144	EA	3/8" Diameter x 5-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	11.64	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0145	EA	3/8" Diameter x 6" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	11.78	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0146	EA	3/8" Diameter x 6-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	11.88	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0147	EA	3/8" Diameter x 7" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	12.19	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0148	EA	3/8" Diameter x 7-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	12.35	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-0149	EA	3/8" Diameter x 8" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	12.57	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	

05 05 23 00-0150 7/16" Diameter, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolts *(05 05 23 00-0098)*

05 05 23 00-0151	EA	7/16" Diameter x 1" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	11.06	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0152	EA	7/16" Diameter x 1-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	11.21	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0153	EA	7/16" Diameter x 2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	11.23	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0154	EA	7/16" Diameter x 2-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	11.70	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0155	EA	7/16" Diameter x 3" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	11.93	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0156	EA	7/16" Diameter x 3-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	12.12	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0157	EA	7/16" Diameter x 4" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	12.88	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0158	EA	7/16" Diameter x 4-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	13.02	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0159	EA	7/16" Diameter x 5" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	13.30	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0160	EA	7/16" Diameter x 5-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	14.03	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0161	EA	7/16" Diameter x 6" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	14.17	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0162	EA	7/16" Diameter x 6-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	14.52	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0163	EA	7/16" Diameter x 7" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	14.92	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-0164	EA	7/16" Diameter x 7-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	15.24	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-0165	EA	7/16" Diameter x 8" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	15.87	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	

05 05 23 00-0166 1/2" Diameter, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolts *(05 05 23 00-0098)*

05 05 23 00-0167	EA	1/2" Diameter x 1" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	10.93	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0168	EA	1/2" Diameter x 1-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	11.12	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0169	EA	1/2" Diameter x 2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	11.30	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0170	EA	1/2" Diameter x 2-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	11.76	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0171	EA	1/2" Diameter x 3" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	11.95	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0172	EA	1/2" Diameter x 3-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	12.15	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0173	EA	1/2" Diameter x 4" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	12.66	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0174	EA	1/2" Diameter x 4-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	12.88	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0175	EA	1/2" Diameter x 5" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	13.27	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0176	EA	1/2" Diameter x 5-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	13.59	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0177	EA	1/2" Diameter x 6" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	13.64	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0178	EA	1/2" Diameter x 6-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	13.97	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0179	EA	1/2" Diameter x 7" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	14.52	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-0180	EA	1/2" Diameter x 7-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	14.72	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-0181	EA	1/2" Diameter x 8" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	15.29	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-0182	EA	1/2" Diameter x 8-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	15.83	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0183	EA	1/2" Diameter x 9" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	16.03	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0184	EA	1/2" Diameter x 9-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	16.83	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0185	EA	1/2" Diameter x 10" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	17.05	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	

05 05 23 00-0186 9/16" Diameter, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolts *(05 05 23 00-0098)*

05 05 23 00-0187	EA	9/16" Diameter x 1" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	11.12	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0188	EA	9/16" Diameter x 1-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	11.38	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0189	EA	9/16" Diameter x 2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	11.44	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0190	EA	9/16" Diameter x 2-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	12.53	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0191	EA	9/16" Diameter x 3" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	12.86	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0192	EA	9/16" Diameter x 3-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	12.97	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0193	EA	9/16" Diameter x 4" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	13.27	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0194	EA	9/16" Diameter x 4-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	13.35	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0195	EA	9/16" Diameter x 5" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	13.63	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0196	EA	9/16" Diameter x 5-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	13.97	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0197	EA	9/16" Diameter x 6" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	14.05	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0198	EA	9/16" Diameter x 6-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	14.30	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0199	EA	9/16" Diameter x 7" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	14.81	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-0200	EA	9/16" Diameter x 7-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	15.11	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-0201	EA	9/16" Diameter x 8" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	15.41	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-0202	EA	9/16" Diameter x 8-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	15.94	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0203	EA	9/16" Diameter x 9" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	16.28	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0204	EA	9/16" Diameter x 9-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	16.52	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0205	EA	9/16" Diameter x 10" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	16.88	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	

05 05 23 00-0206 5/8" Diameter, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolts *(05 05 23 00-0098)*

05 05 23 00-0207	EA	5/8" Diameter x 1" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	12.97	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0208	EA	5/8" Diameter x 1-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	13.14	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0209	EA	5/8" Diameter x 2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	13.36	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0210	EA	5/8" Diameter x 2-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	13.91	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0211	EA	5/8" Diameter x 3" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	14.24	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-0212	EA	5/8" Diameter x 3-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	14.65	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-0213	EA	5/8" Diameter x 4" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	15.43	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-0214	EA	5/8" Diameter x 4-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	16.06	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-0215	EA	5/8" Diameter x 5" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	16.54	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-0216	EA	5/8" Diameter x 5-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	17.00	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0217	EA	5/8" Diameter x 6" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	17.06	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0218	EA	5/8" Diameter x 6-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	17.89	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0219	EA	5/8" Diameter x 7" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	18.62	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-0220	EA	5/8" Diameter x 7-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	19.28	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-0221	EA	5/8" Diameter x 8" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	20.05	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-0222	EA	5/8" Diameter x 8-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	21.16	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0223	EA	5/8" Diameter x 9" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	21.91	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0224	EA	5/8" Diameter x 9-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	22.68	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0225	EA	5/8" Diameter x 10" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	23.28	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	

05 05 23 00-0226 3/4" Diameter, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolts *(05 05 23 00-0098)*

05 05 23 00-0227	EA	3/4" Diameter x 1" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	13.53	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0228	EA	3/4" Diameter x 1-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	13.88	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0229	EA	3/4" Diameter x 2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	14.19	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0230	EA	3/4" Diameter x 2-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	14.84	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-0231	EA	3/4" Diameter x 3" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	15.32	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0232	EA	3/4" Diameter x 3-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	15.75	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-0233	EA	3/4" Diameter x 4" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	16.48	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-0234	EA	3/4" Diameter x 4-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	17.08	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-0235	EA	3/4" Diameter x 5" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	17.55	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-0236	EA	3/4" Diameter x 5-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	18.77	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0237	EA	3/4" Diameter x 6" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	19.17	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0238	EA	3/4" Diameter x 6-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	19.90	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0239	EA	3/4" Diameter x 7" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	20.21	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-0240	EA	3/4" Diameter x 7-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	21.94	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-0241	EA	3/4" Diameter x 8" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	22.74	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-0242	EA	3/4" Diameter x 8-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	24.06	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0243	EA	3/4" Diameter x 9" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	24.87	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0244	EA	3/4" Diameter x 9-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	25.93	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0245	EA	3/4" Diameter x 10" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	26.97	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	

05 05 23 00-0246 7/8" Diameter, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolts *(05 05 23 00-0098)*

05 05 23 00-0247	EA	7/8" Diameter x 1" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	16.63	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0248	EA	7/8" Diameter x 1-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	16.91	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0249	EA	7/8" Diameter x 2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	17.06	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0250	EA	7/8" Diameter x 2-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	17.70	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-0251	EA	7/8" Diameter x 3" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	18.48	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-0252	EA	7/8" Diameter x 3-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	19.40	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0253	EA	7/8" Diameter x 4" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	20.43	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-0254	EA	7/8" Diameter x 4-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	21.76	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-0255	EA	7/8" Diameter x 5" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	22.50	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-0256	EA	7/8" Diameter x 5-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	23.33	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-0257	EA	7/8" Diameter x 6" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	23.77	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-0258	EA	7/8" Diameter x 6-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	24.82	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-0259	EA	7/8" Diameter x 7" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	26.14	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0260	EA	7/8" Diameter x 7-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	27.21	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0261	EA	7/8" Diameter x 8" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	28.26	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0262	EA	7/8" Diameter x 8-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	29.50	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0263	EA	7/8" Diameter x 9" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	30.61	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0264	EA	7/8" Diameter x 9-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	31.64	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0265	EA	7/8" Diameter x 10" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	32.74	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0266		1" Diameter, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolts *(05 05 23 00-0098)*		
05 05 23 00-0267	EA	1" Diameter x 1-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	17.92	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0268	EA	1" Diameter x 2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	19.85	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0269	EA	1" Diameter x 2-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	21.31	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-0270	EA	1" Diameter x 3" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	22.84	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-0271	EA	1" Diameter x 3-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	24.22	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-0272	EA	1" Diameter x 4" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	25.91	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-0273	EA	1" Diameter x 4-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	27.25	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0274	EA	1" Diameter x 5" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	28.63	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-0275	EA	1" Diameter x 5-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	29.57	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-0276	EA	1" Diameter x 6" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	30.23	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-0277	EA	1" Diameter x 6-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	31.39	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-0278	EA	1" Diameter x 7" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	32.82	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0279	EA	1" Diameter x 7-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	33.96	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0280	EA	1" Diameter x 8" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	35.16	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0281	EA	1" Diameter x 8-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	36.37	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0282	EA	1" Diameter x 9" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	37.72	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0283	EA	1" Diameter x 9-1/2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	38.91	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0284	EA	1" Diameter x 10" Length, Zinc Plated Steel, Low Carbon/Grade 2, Hex Head Bolt	40.12	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	

05 05 23 00-0285 Zinc Plated Steel, Grade 5, Hex Head Bolts *(05 05 23 00-0097)*

05 05 23 00-0286 1/4" Diameter, Zinc Plated Steel, Grade 5, Hex Head Bolts *(05 05 23 00-0285)*

05 05 23 00-0287	EA	1/4" Diameter x 1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	9.20	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0288	EA	1/4" Diameter x 1" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	9.26	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0289	EA	1/4" Diameter x 1-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	9.31	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0290	EA	1/4" Diameter x 2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	9.41	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0291	EA	1/4" Diameter x 2-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	9.78	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0292	EA	1/4" Diameter x 3" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	9.96	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0293	EA	1/4" Diameter x 3-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	10.15	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0294	EA	1/4" Diameter x 4" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	10.56	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0295	EA	1/4" Diameter x 4-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	10.80	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0296	EA	1/4" Diameter x 5" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	10.97	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0297	EA	1/4" Diameter x 5-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	11.40	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0298	EA	1/4" Diameter x 6" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	11.56	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0299	EA	1/4" Diameter x 6-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	11.72	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0300	EA	1/4" Diameter x 7" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	12.17	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-0301	EA	1/4" Diameter x 7-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	12.39	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-0302	EA	1/4" Diameter x 8" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	12.61	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	

05 05 23 00-0303 5/16" Diameter, Zinc Plated Steel, Grade 5, Hex Head Bolts *(05 05 23 00-0285)*

05 05 23 00-0304	EA	5/16" Diameter x 1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	9.32	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0305	EA	5/16" Diameter x 1" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	9.36	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0306	EA	5/16" Diameter x 1-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	9.44	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0307	EA	5/16" Diameter x 2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	9.57	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0308	EA	5/16" Diameter x 2-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	9.94	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0309	EA	5/16" Diameter x 3" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	10.11	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0310	EA	5/16" Diameter x 3-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	10.42	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0311	EA	5/16" Diameter x 4" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	10.82	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0312	EA	5/16" Diameter x 4-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	11.06	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0313	EA	5/16" Diameter x 5" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	11.29	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0314	EA	5/16" Diameter x 5-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	11.99	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0315	EA	5/16" Diameter x 6" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	12.06	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0316	EA	5/16" Diameter x 6-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	12.36	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0317	EA	5/16" Diameter x 7" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	13.01	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-0318	EA	5/16" Diameter x 7-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	13.41	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-0319	EA	5/16" Diameter x 8" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	13.81	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	

05 05 23 00-0320 3/8" Diameter, Zinc Plated Steel, Grade 5, Hex Head Bolts *(05 05 23 00-0285)*

05 05 23 00-0321	EA	3/8" Diameter x 1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	9.39	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0322	EA	3/8" Diameter x 1" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	9.42	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0323	EA	3/8" Diameter x 1-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	9.56	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0324	EA	3/8" Diameter x 2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	9.70	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0325	EA	3/8" Diameter x 2-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	10.12	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0326	EA	3/8" Diameter x 3" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	10.29	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0327	EA	3/8" Diameter x 3-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	10.56	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0328	EA	3/8" Diameter x 4" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	11.10	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0329	EA	3/8" Diameter x 4-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	11.73	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0330	EA	3/8" Diameter x 5" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	12.01	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0331	EA	3/8" Diameter x 5-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	12.65	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0332	EA	3/8" Diameter x 6" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	12.91	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0333	EA	3/8" Diameter x 6-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	13.38	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0334	EA	3/8" Diameter x 7" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	13.98	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-0335	EA	3/8" Diameter x 7-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	14.61	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-0336	EA	3/8" Diameter x 8" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	15.11	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	

05 05 23 00-0337 7/16" Diameter, Zinc Plated Steel, Grade 5, Hex Head Bolts *(05 05 23 00-0285)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0338	EA	7/16" Diameter x 1" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	10.95	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0339	EA	7/16" Diameter x 1-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	11.08	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0340	EA	7/16" Diameter x 2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	11.40	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0341	EA	7/16" Diameter x 2-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	11.90	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0342	EA	7/16" Diameter x 3" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	12.13	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0343	EA	7/16" Diameter x 3-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	12.35	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0344	EA	7/16" Diameter x 4" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	12.90	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0345	EA	7/16" Diameter x 4-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	14.14	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0346	EA	7/16" Diameter x 5" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	14.69	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0347	EA	7/16" Diameter x 5-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	15.13	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0348	EA	7/16" Diameter x 6" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	15.38	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0349	EA	7/16" Diameter x 6-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	15.65	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0350	EA	7/16" Diameter x 7" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	16.26	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-0351	EA	7/16" Diameter x 7-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	16.62	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-0352	EA	7/16" Diameter x 8" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	16.98	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	

05 05 23 00-0353 1/2" Diameter, Zinc Plated Steel, Grade 5, Hex Head Bolts *(05 05 23 00-0285)*

05 05 23 00-0354	EA	1/2" Diameter x 1" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	11.12	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0355	EA	1/2" Diameter x 1-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	11.29	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0356	EA	1/2" Diameter x 2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	11.47	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0357	EA	1/2" Diameter x 2-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	12.02	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0358	EA	1/2" Diameter x 3" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	12.31	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0359	EA	1/2" Diameter x 3-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	12.60	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0360	EA	1/2" Diameter x 4" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	13.13	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0361	EA	1/2" Diameter x 4-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	14.11	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0362	EA	1/2" Diameter x 5" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	14.17	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0363	EA	1/2" Diameter x 5-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	15.10	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0364	EA	1/2" Diameter x 6" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	15.48	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0365	EA	1/2" Diameter x 6-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	16.45	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0366	EA	1/2" Diameter x 7" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	17.58	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-0367	EA	1/2" Diameter x 7-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	18.13	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-0368	EA	1/2" Diameter x 8" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	18.33	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-0369	EA	1/2" Diameter x 8-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	19.60	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0370	EA	1/2" Diameter x 9" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	20.56	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0371	EA	1/2" Diameter x 9-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	21.91	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0372	EA	1/2" Diameter x 10" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	22.43	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	

05 05 23 00-0373 9/16" Diameter, Zinc Plated Steel, Grade 5, Hex Head Bolts *(05 05 23 00-0285)*

05 05 23 00-0374	EA	9/16" Diameter x 1" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	11.65	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0375	EA	9/16" Diameter x 1-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	11.96	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0376	EA	9/16" Diameter x 2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	12.24	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0377	EA	9/16" Diameter x 2-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	12.81	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0378	EA	9/16" Diameter x 3" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	13.20	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0379	EA	9/16" Diameter x 3-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	13.64	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0380	EA	9/16" Diameter x 4" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	14.40	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0381	EA	9/16" Diameter x 4-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	16.10	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0382	EA	9/16" Diameter x 5" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	16.54	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0383	EA	9/16" Diameter x 5-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	17.30	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0384	EA	9/16" Diameter x 6" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	17.77	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0385	EA	9/16" Diameter x 6-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	19.34	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0386	EA	9/16" Diameter x 7" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	21.52	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-0387	EA	9/16" Diameter x 7-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	22.17	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-0388	EA	9/16" Diameter x 8" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	23.25	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-0389	EA	9/16" Diameter x 8-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	24.53	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0390	EA	9/16" Diameter x 9" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	24.93	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0391	EA	9/16" Diameter x 9-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	25.32	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0392	EA	9/16" Diameter x 10" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	26.29	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	

05 05 23 00-0393 5/8" Diameter, Zinc Plated Steel, Grade 5, Hex Head Bolts *(05 05 23 00-0285)*

05 05 23 00-0394	EA	5/8" Diameter x 1" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	13.27	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0395	EA	5/8" Diameter x 1-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	13.38	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0396	EA	5/8" Diameter x 2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	13.47	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0397	EA	5/8" Diameter x 2-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	14.02	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-0398	EA	5/8" Diameter x 3" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	14.54	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-0399	EA	5/8" Diameter x 3-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	15.01	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-0400	EA	5/8" Diameter x 4" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	15.76	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0401	EA	5/8" Diameter x 4-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	16.67	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-0402	EA	5/8" Diameter x 5" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	17.16	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-0403	EA	5/8" Diameter x 5-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	17.66	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0404	EA	5/8" Diameter x 6" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	18.44	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0405	EA	5/8" Diameter x 6-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	19.68	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0406	EA	5/8" Diameter x 7" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	21.08	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-0407	EA	5/8" Diameter x 7-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	22.10	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-0408	EA	5/8" Diameter x 8" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	22.25	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-0409	EA	5/8" Diameter x 8-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	24.38	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0410	EA	5/8" Diameter x 9" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	25.76	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0411	EA	5/8" Diameter x 9-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	27.79	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0412	EA	5/8" Diameter x 10" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	28.50	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	

05 05 23 00-0413 3/4" Diameter, Zinc Plated Steel, Grade 5, Hex Head Bolts *(05 05 23 00-0285)*

05 05 23 00-0414	EA	3/4" Diameter x 1" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	14.43	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0415	EA	3/4" Diameter x 1-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	14.63	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0416	EA	3/4" Diameter x 2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	14.74	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0417	EA	3/4" Diameter x 2-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	15.43	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-0418	EA	3/4" Diameter x 3" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	15.95	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-0419	EA	3/4" Diameter x 3-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	16.74	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-0420	EA	3/4" Diameter x 4" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	17.53	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-0421	EA	3/4" Diameter x 4-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	18.04	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0422	EA	3/4" Diameter x 5" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	19.10	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-0423	EA	3/4" Diameter x 5-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	19.84	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0424	EA	3/4" Diameter x 6" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	20.72	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0425	EA	3/4" Diameter x 6-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	21.79	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0426	EA	3/4" Diameter x 7" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	23.57	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-0427	EA	3/4" Diameter x 7-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	24.69	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-0428	EA	3/4" Diameter x 8" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	25.32	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-0429	EA	3/4" Diameter x 8-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	27.25	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0430	EA	3/4" Diameter x 9" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	27.82	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0431	EA	3/4" Diameter x 9-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	29.66	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0432	EA	3/4" Diameter x 10" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	30.11	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	

05 05 23 00-0433 7/8" Diameter, Zinc Plated Steel, Grade 5, Hex Head Bolts *(05 05 23 00-0285)*

05 05 23 00-0434	EA	7/8" Diameter x 1" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	17.18	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0435	EA	7/8" Diameter x 1-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	17.43	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0436	EA	7/8" Diameter x 2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	17.78	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0437	EA	7/8" Diameter x 2-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	18.37	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-0438	EA	7/8" Diameter x 3" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	19.41	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-0439	EA	7/8" Diameter x 3-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	20.10	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-0440	EA	7/8" Diameter x 4" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	20.88	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-0441	EA	7/8" Diameter x 4-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	22.11	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-0442	EA	7/8" Diameter x 5" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	23.03	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0443	EA	7/8" Diameter x 5-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	23.72	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-0444	EA	7/8" Diameter x 6" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	24.49	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-0445	EA	7/8" Diameter x 6-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	27.79	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-0446	EA	7/8" Diameter x 7" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	29.23	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0447	EA	7/8" Diameter x 7-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	30.68	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0448	EA	7/8" Diameter x 8" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	30.77	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0449	EA	7/8" Diameter x 8-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	33.11	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0450	EA	7/8" Diameter x 9" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	34.53	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0451	EA	7/8" Diameter x 9-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	35.74	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0452	EA	7/8" Diameter x 10" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	36.95	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	

05 05 23 00-0453 1" Diameter, Zinc Plated Steel, Grade 5, Hex Head Bolts *(05 05 23 00-0285)*

05 05 23 00-0454	EA	1" Diameter x 1-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	19.49	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0455	EA	1" Diameter x 2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	19.57	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0456	EA	1" Diameter x 2-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	20.59	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-0457	EA	1" Diameter x 3" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	21.60	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-0458	EA	1" Diameter x 3-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	22.33	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-0459	EA	1" Diameter x 4" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	23.54	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-0460	EA	1" Diameter x 4-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	24.72	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-0461	EA	1" Diameter x 5" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	26.43	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-0462	EA	1" Diameter x 5-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	27.90	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-0463	EA	1" Diameter x 6" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	28.27	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0464	EA	1" Diameter x 6-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	30.65	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-0465	EA	1" Diameter x 7" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	32.45	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0466	EA	1" Diameter x 7-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	35.00	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0467	EA	1" Diameter x 8" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	35.72	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0468	EA	1" Diameter x 8-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	44.13	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0469	EA	1" Diameter x 9" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	44.77	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0470	EA	1" Diameter x 9-1/2" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	46.52	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0471	EA	1" Diameter x 10" Length, Zinc Plated Steel, Grade 5, Hex Head Bolt	47.71	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	

05 05 23 00-0472 Zinc Plated Steel, Grade 8, Hex Head Bolts *(05 05 23 00-0097)*

05 05 23 00-0473 1/4" Diameter, Zinc Plated Steel, Grade 8, Hex Head Bolts *(05 05 23 00-0472)*

05 05 23 00-0474	EA	1/4" Diameter x 1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	9.23	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0475	EA	1/4" Diameter x 1" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	9.35	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0476	EA	1/4" Diameter x 1-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	9.41	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0477	EA	1/4" Diameter x 2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	9.54	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0478	EA	1/4" Diameter x 2-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	9.88	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0479	EA	1/4" Diameter x 3" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	10.03	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0480	EA	1/4" Diameter x 3-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	10.17	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0481	EA	1/4" Diameter x 4" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	10.42	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0482	EA	1/4" Diameter x 4-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	10.82	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0483	EA	1/4" Diameter x 5" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	11.19	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0484	EA	1/4" Diameter x 5-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	11.64	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0485	EA	1/4" Diameter x 6" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	11.84	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0486	EA	1/4" Diameter x 6-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	12.10	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0487	EA	1/4" Diameter x 7" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	12.52	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-0488	EA	1/4" Diameter x 7-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	13.01	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-0489	EA	1/4" Diameter x 8" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	13.23	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	

05 05 23 00-0490 5/16" Diameter, Zinc Plated Steel, Grade 8, Hex Head Bolts *(05 05 23 00-0472)*

05 05 23 00-0491	EA	5/16" Diameter x 1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	9.33	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0492	EA	5/16" Diameter x 1" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	9.41	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0493	EA	5/16" Diameter x 1-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	9.64	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0494	EA	5/16" Diameter x 2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	9.69	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0495	EA	5/16" Diameter x 2-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	10.08	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0496	EA	5/16" Diameter x 3" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	10.43	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0497	EA	5/16" Diameter x 3-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	10.53	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0498	EA	5/16" Diameter x 4" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	10.99	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0499	EA	5/16" Diameter x 4-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	11.21	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0500	EA	5/16" Diameter x 5" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	11.71	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0501	EA	5/16" Diameter x 5-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	12.27	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0502	EA	5/16" Diameter x 6" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	12.46	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0503	EA	5/16" Diameter x 6-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	12.76	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0504	EA	5/16" Diameter x 7" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	13.21	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-0505	EA	5/16" Diameter x 7-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	13.43	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-0506	EA	5/16" Diameter x 8" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	13.85	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0507		**3/8" Diameter, Zinc Plated Steel, Grade 8, Hex Head Bolts** *(05 05 23 00-0472)*		
05 05 23 00-0508	EA	3/8" Diameter x 1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	9.58	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0509	EA	3/8" Diameter x 1" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	9.61	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0510	EA	3/8" Diameter x 1-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	9.63	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0511	EA	3/8" Diameter x 2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	9.90	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0512	EA	3/8" Diameter x 2-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	10.32	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0513	EA	3/8" Diameter x 3" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	10.60	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0514	EA	3/8" Diameter x 3-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	10.85	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0515	EA	3/8" Diameter x 4" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	11.88	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0516	EA	3/8" Diameter x 4-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	12.20	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0517	EA	3/8" Diameter x 5" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	12.26	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0518	EA	3/8" Diameter x 5-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	12.65	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0519	EA	3/8" Diameter x 6" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	12.99	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0520	EA	3/8" Diameter x 6-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	14.53	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0521	EA	3/8" Diameter x 7" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	15.14	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-0522	EA	3/8" Diameter x 7-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	15.83	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-0523	EA	3/8" Diameter x 8" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	17.45	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-0524		**7/16" Diameter, Zinc Plated Steel, Grade 8, Hex Head Bolts** *(05 05 23 00-0472)*		
05 05 23 00-0525	EA	7/16" Diameter x 1" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	11.13	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0526	EA	7/16" Diameter x 1-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	11.17	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0527	EA	7/16" Diameter x 2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	11.61	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0528	EA	7/16" Diameter x 2-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	11.90	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0529	EA	7/16" Diameter x 3" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	12.38	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0530	EA	7/16" Diameter x 3-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	12.65	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0531	EA	7/16" Diameter x 4" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	12.96	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0532	EA	7/16" Diameter x 4-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	14.04	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0533	EA	7/16" Diameter x 5" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	14.89	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0534	EA	7/16" Diameter x 5-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	15.73	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0535	EA	7/16" Diameter x 6" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	16.03	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0536	EA	7/16" Diameter x 6-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	16.47	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0537	EA	7/16" Diameter x 7" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	17.38	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-0538	EA	7/16" Diameter x 7-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	18.81	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-0539	EA	7/16" Diameter x 8" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	18.92	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	

05 05 23 00-0540 1/2" Diameter, Zinc Plated Steel, Grade 8, Hex Head Bolts *(05 05 23 00-0472)*

05 05 23 00-0541	EA	1/2" Diameter x 1" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	11.42	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0542	EA	1/2" Diameter x 1-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	11.73	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0543	EA	1/2" Diameter x 2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	11.93	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0544	EA	1/2" Diameter x 2-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	12.38	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0545	EA	1/2" Diameter x 3" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	12.73	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0546	EA	1/2" Diameter x 3-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	13.52	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0547	EA	1/2" Diameter x 4" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	14.33	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0548	EA	1/2" Diameter x 4-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	14.78	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0549	EA	1/2" Diameter x 5" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	15.11	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0550	EA	1/2" Diameter x 5-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	15.95	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0551	EA	1/2" Diameter x 6" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	16.94	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0552	EA	1/2" Diameter x 6-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	17.85	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0553	EA	1/2" Diameter x 7" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	18.88	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-0554	EA	1/2" Diameter x 7-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	19.29	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-0555	EA	1/2" Diameter x 8" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	20.42	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-0556	EA	1/2" Diameter x 8-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	22.57	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0557	EA	1/2" Diameter x 9" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	23.39	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0558	EA	1/2" Diameter x 9-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	23.81	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0559	EA	1/2" Diameter x 10" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	25.84	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	

05 05 23 00-0560 9/16" Diameter, Zinc Plated Steel, Grade 8, Hex Head Bolts *(05 05 23 00-0472)*

05 05 23 00-0561	EA	9/16" Diameter x 1" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	11.71	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0562	EA	9/16" Diameter x 1-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	11.90	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0563	EA	9/16" Diameter x 2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	12.34	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0564	EA	9/16" Diameter x 2-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	13.23	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0565	EA	9/16" Diameter x 3" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	13.39	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0566	EA	9/16" Diameter x 3-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	14.03	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0567	EA	9/16" Diameter x 4" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	14.72	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0568	EA	9/16" Diameter x 4-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	16.82	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0569	EA	9/16" Diameter x 5" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	17.23	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0570	EA	9/16" Diameter x 5-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	17.83	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0571	EA	9/16" Diameter x 6" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	18.74	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0572	EA	9/16" Diameter x 6-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	22.19	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0573	EA	9/16" Diameter x 7" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	26.47	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-0574	EA	9/16" Diameter x 7-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	31.46	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-0575	EA	9/16" Diameter x 8" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	36.88	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	

05 05 23 00-0576 5/8" Diameter, Zinc Plated Steel, Grade 8, Hex Head Bolts *(05 05 23 00-0472)*

05 05 23 00-0577	EA	5/8" Diameter x 1" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	13.68	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0578	EA	5/8" Diameter x 1-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	13.86	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0579	EA	5/8" Diameter x 2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	14.35	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0580	EA	5/8" Diameter x 2-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	15.31	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-0581	EA	5/8" Diameter x 3" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	15.89	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-0582	EA	5/8" Diameter x 3-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	16.20	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-0583	EA	5/8" Diameter x 4" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	16.68	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-0584	EA	5/8" Diameter x 4-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	17.72	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-0585	EA	5/8" Diameter x 5" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	18.18	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-0586	EA	5/8" Diameter x 5-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	18.91	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0587	EA	5/8" Diameter x 6" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	19.40	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0588	EA	5/8" Diameter x 6-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	20.42	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0589	EA	5/8" Diameter x 7" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	23.10	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-0590	EA	5/8" Diameter x 7-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	24.27	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-0591	EA	5/8" Diameter x 8" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	24.75	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0592	EA	5/8" Diameter x 8-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	27.08	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0593	EA	5/8" Diameter x 9" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	29.36	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0594	EA	5/8" Diameter x 9-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	29.53	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0595	EA	5/8" Diameter x 10" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	31.65	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	

05 05 23 00-0596 3/4" Diameter, Zinc Plated Steel, Grade 8, Hex Head Bolts *(05 05 23 00-0472)*

05 05 23 00-0597	EA	3/4" Diameter x 1" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	14.76	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0598	EA	3/4" Diameter x 1-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	14.96	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0599	EA	3/4" Diameter x 2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	15.11	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0600	EA	3/4" Diameter x 2-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	15.65	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-0601	EA	3/4" Diameter x 3" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	16.08	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-0602	EA	3/4" Diameter x 3-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	17.32	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-0603	EA	3/4" Diameter x 4" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	18.10	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-0604	EA	3/4" Diameter x 4-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	18.21	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-0605	EA	3/4" Diameter x 5" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	19.89	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-0606	EA	3/4" Diameter x 5-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	20.75	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0607	EA	3/4" Diameter x 6" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	21.63	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0608	EA	3/4" Diameter x 6-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	23.28	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0609	EA	3/4" Diameter x 7" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	25.55	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-0610	EA	3/4" Diameter x 7-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	26.43	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-0611	EA	3/4" Diameter x 8" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	26.89	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-0612	EA	3/4" Diameter x 8-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	29.33	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0613	EA	3/4" Diameter x 9" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	30.93	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0614	EA	3/4" Diameter x 9-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	32.08	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0615	EA	3/4" Diameter x 10" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	32.50	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	

05 05 23 00-0616 7/8" Diameter, Zinc Plated Steel, Grade 8, Hex Head Bolts *(05 05 23 00-0472)*

05 05 23 00-0617	EA	7/8" Diameter x 1-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	19.04	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0618	EA	7/8" Diameter x 2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	19.59	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0619	EA	7/8" Diameter x 2-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	20.64	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-0620	EA	7/8" Diameter x 3" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	22.27	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-0621	EA	7/8" Diameter x 3-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	22.46	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-0622	EA	7/8" Diameter x 4" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	23.07	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-0623	EA	7/8" Diameter x 4-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	27.01	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-0624	EA	7/8" Diameter x 5" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	28.02	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-0625	EA	7/8" Diameter x 5-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	30.61	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-0626	EA	7/8" Diameter x 6" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	32.08	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-0627	EA	7/8" Diameter x 6-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	35.90	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-0628	EA	7/8" Diameter x 7" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	37.44	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0629	EA	7/8" Diameter x 7-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	41.36	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0630	EA	7/8" Diameter x 8" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	42.95	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0631	EA	7/8" Diameter x 8-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	44.47	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0632	EA	7/8" Diameter x 9" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	44.93	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0633	EA	7/8" Diameter x 9-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	45.32	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0634	EA	7/8" Diameter x 10" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	46.27	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	

05 05 23 00-0635 1" Diameter, Zinc Plated Steel, Grade 8, Hex Head Bolts *(05 05 23 00-0472)*

05 05 23 00-0636	EA	1" Diameter x 1-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	20.59	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0637	EA	1" Diameter x 2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	21.96	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0638	EA	1" Diameter x 2-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	22.81	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-0639	EA	1" Diameter x 3" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	23.83	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-0640	EA	1" Diameter x 3-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	25.74	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-0641	EA	1" Diameter x 4" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	26.51	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-0642	EA	1" Diameter x 4-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	28.16	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-0643	EA	1" Diameter x 5" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	30.36	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-0644	EA	1" Diameter x 5-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	31.64	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-0645	EA	1" Diameter x 6" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	32.57	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-0646	EA	1" Diameter x 6-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	37.18	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-0647	EA	1" Diameter x 7" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	38.14	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0648	EA	1" Diameter x 7-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	43.34	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0649	EA	1" Diameter x 8" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	44.24	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0650	EA	1" Diameter x 8-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	47.26	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0651	EA	1" Diameter x 9" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	48.76	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0652	EA	1" Diameter x 9-1/2" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	52.72	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0653	EA	1" Diameter x 10" Length, Yellow Zinc Plated Steel, Grade 8, Hex Head Bolt	55.14	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	

05 05 23 00-0654 Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolts *(05 05 23 00-0097)*

05 05 23 00-0655 1/4" Diameter, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolts *(05 05 23 00-0654)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0656	EA	1/4" Diameter x 1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	9.39	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0657	EA	1/4" Diameter x 1" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	9.41	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0658	EA	1/4" Diameter x 1-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	9.44	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0659	EA	1/4" Diameter x 2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	9.72	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0660	EA	1/4" Diameter x 2-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	10.12	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0661	EA	1/4" Diameter x 3" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	10.28	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0662	EA	1/4" Diameter x 3-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	10.35	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0663	EA	1/4" Diameter x 4" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	10.62	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0664	EA	1/4" Diameter x 4-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	10.82	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0665	EA	1/4" Diameter x 5" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	10.87	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0666	EA	1/4" Diameter x 5-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	11.26	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0667	EA	1/4" Diameter x 6" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	11.44	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0668	EA	1/4" Diameter x 6-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	11.50	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0669	EA	1/4" Diameter x 7" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	11.91	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-0670	EA	1/4" Diameter x 7-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	12.38	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-0671	EA	1/4" Diameter x 8" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	12.97	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	

05 05 23 00-0672 5/16" Diameter, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolts *(05 05 23 00-0654)*

05 05 23 00-0673	EA	5/16" Diameter x 1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	9.27	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0674	EA	5/16" Diameter x 1" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	9.81	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0675	EA	5/16" Diameter x 1-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	9.86	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0676	EA	5/16" Diameter x 2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	9.88	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0677	EA	5/16" Diameter x 2-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	10.38	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0678	EA	5/16" Diameter x 3" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	10.89	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0679	EA	5/16" Diameter x 3-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	10.99	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0680	EA	5/16" Diameter x 4" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	11.38	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0681	EA	5/16" Diameter x 4-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	11.43	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0682	EA	5/16" Diameter x 5" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	11.84	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0683	EA	5/16" Diameter x 5-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	12.21	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0684	EA	5/16" Diameter x 6" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	12.36	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0685	EA	5/16" Diameter x 6-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	12.76	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0686	EA	5/16" Diameter x 7" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	13.79	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-0687	EA	5/16" Diameter x 7-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	14.42	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-0688	EA	5/16" Diameter x 8" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	15.00	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	

05 05 23 00-0689 3/8" Diameter, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolts *(05 05 23 00-0654)*

05 05 23 00-0690	EA	3/8" Diameter x 1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	9.43	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0691	EA	3/8" Diameter x 1" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	9.56	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0692	EA	3/8" Diameter x 1-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	9.69	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0693	EA	3/8" Diameter x 2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	10.02	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0694	EA	3/8" Diameter x 2-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	10.42	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0695	EA	3/8" Diameter x 3" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	10.70	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0696	EA	3/8" Diameter x 3-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	10.89	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0697	EA	3/8" Diameter x 4" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	11.41	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0698	EA	3/8" Diameter x 4-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	11.55	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0699	EA	3/8" Diameter x 5" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	11.88	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0700	EA	3/8" Diameter x 5-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	12.28	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0701	EA	3/8" Diameter x 6" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	12.74	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0702	EA	3/8" Diameter x 6-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	12.82	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0703	EA	3/8" Diameter x 7" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	13.10	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-0704	EA	3/8" Diameter x 7-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	13.15	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-0705	EA	3/8" Diameter x 8" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	13.68	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	

05 05 23 00-0706 7/16" Diameter, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolts *(05 05 23 00-0654)*

05 05 23 00-0707	EA	7/16" Diameter x 1" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	11.53	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0708	EA	7/16" Diameter x 1-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	12.12	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0709	EA	7/16" Diameter x 2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	12.57	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0710	EA	7/16" Diameter x 2-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	13.59	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0711	EA	7/16" Diameter x 3" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	13.63	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0712	EA	7/16" Diameter x 3-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	13.67	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0713	EA	7/16" Diameter x 4" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	14.31	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0714	EA	7/16" Diameter x 4-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	14.73	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0715	EA	7/16" Diameter x 5" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	15.11	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0716	EA	7/16" Diameter x 5-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	15.81	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0717	EA	7/16" Diameter x 6" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	16.25	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	

05 05 23 00-0718 1/2" Diameter, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolts *(05 05 23 00-0654)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0719	EA	1/2" Diameter x 1" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	11.27	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0720	EA	1/2" Diameter x 1-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	11.46	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0721	EA	1/2" Diameter x 2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	11.85	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0722	EA	1/2" Diameter x 2-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	12.54	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0723	EA	1/2" Diameter x 3" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	12.84	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0724	EA	1/2" Diameter x 3-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	13.39	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0725	EA	1/2" Diameter x 4" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	13.74	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0726	EA	1/2" Diameter x 4-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	13.95	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0727	EA	1/2" Diameter x 5" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	14.39	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0728	EA	1/2" Diameter x 5-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	14.86	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0729	EA	1/2" Diameter x 6" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	15.35	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0730	EA	1/2" Diameter x 6-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	15.40	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0731	EA	1/2" Diameter x 7" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	15.74	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-0732	EA	1/2" Diameter x 7-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	15.87	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-0733	EA	1/2" Diameter x 8" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	16.24	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-0734	EA	1/2" Diameter x 8-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	18.26	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0735	EA	1/2" Diameter x 9" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	18.56	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0736	EA	1/2" Diameter x 9-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	18.63	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0737	EA	1/2" Diameter x 10" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	18.80	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	

05 05 23 00-0738 5/8" Diameter, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolts *(05 05 23 00-0654)*

05 05 23 00-0739	EA	5/8" Diameter x 1" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	13.25	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0740	EA	5/8" Diameter x 1-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	13.55	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0741	EA	5/8" Diameter x 2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	13.75	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0742	EA	5/8" Diameter x 2-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	14.33	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-0743	EA	5/8" Diameter x 3" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	14.77	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-0744	EA	5/8" Diameter x 3-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	15.75	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-0745	EA	5/8" Diameter x 4" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	16.17	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-0746	EA	5/8" Diameter x 4-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	16.34	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-0747	EA	5/8" Diameter x 5" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	16.64	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-0748	EA	5/8" Diameter x 5-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	17.28	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0749	EA	5/8" Diameter x 6" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	17.63	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0750	EA	5/8" Diameter x 6-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	18.63	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0751	EA	5/8" Diameter x 7" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	18.95	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-0752	EA	5/8" Diameter x 7-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	20.71	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-0753	EA	5/8" Diameter x 8" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	21.23	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-0754	EA	5/8" Diameter x 8-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	22.24	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0755	EA	5/8" Diameter x 9" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	23.07	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0756	EA	5/8" Diameter x 9-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	24.98	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0757	EA	5/8" Diameter x 10" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	25.12	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	

05 05 23 00-0758 3/4" Diameter, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolts *(05 05 23 00-0654)*

05 05 23 00-0759	EA	3/4" Diameter x 1" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	14.68	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0760	EA	3/4" Diameter x 1-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	14.74	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0761	EA	3/4" Diameter x 2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	15.11	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0762	EA	3/4" Diameter x 2-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	16.17	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-0763	EA	3/4" Diameter x 3" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	17.54	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-0764	EA	3/4" Diameter x 3-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	18.42	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-0765	EA	3/4" Diameter x 4" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	19.15	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-0766	EA	3/4" Diameter x 4-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	19.23	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-0767	EA	3/4" Diameter x 5" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	19.42	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-0768	EA	3/4" Diameter x 5-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	19.79	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0769	EA	3/4" Diameter x 6" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	20.96	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0770	EA	3/4" Diameter x 6-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	21.44	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0771	EA	3/4" Diameter x 7" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	22.65	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-0772	EA	3/4" Diameter x 7-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	22.80	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-0773	EA	3/4" Diameter x 8" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	23.28	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-0774	EA	3/4" Diameter x 8-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	24.25	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0775	EA	3/4" Diameter x 9" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	24.76	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0776	EA	3/4" Diameter x 9-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	25.04	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0777	EA	3/4" Diameter x 10" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	25.18	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	

05 05 23 00-0778 7/8" Diameter, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolts *(05 05 23 00-0654)*

05 05 23 00-0779	EA	7/8" Diameter x 1-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	18.82	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0780	EA	7/8" Diameter x 2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	19.38	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0781	EA	7/8" Diameter x 2-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	19.95	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0782	EA	7/8" Diameter x 3" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	22.88	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-0783	EA	7/8" Diameter x 3-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	23.32	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-0784	EA	7/8" Diameter x 4" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	24.15	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-0785	EA	7/8" Diameter x 4-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	24.76	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-0786	EA	7/8" Diameter x 5" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	25.55	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-0787	EA	7/8" Diameter x 5-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	26.35	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-0788	EA	7/8" Diameter x 6" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	26.96	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-0789	EA	7/8" Diameter x 6-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	31.82	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-0790	EA	7/8" Diameter x 7" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	32.75	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0791	EA	7/8" Diameter x 7-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	33.88	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0792	EA	7/8" Diameter x 8" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	34.15	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0793	EA	7/8" Diameter x 8-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	34.72	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0794	EA	7/8" Diameter x 9" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	35.34	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0795	EA	7/8" Diameter x 9-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	36.13	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0796	EA	7/8" Diameter x 10" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	36.87	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	

05 05 23 00-0797 1" Diameter, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolts *(05 05 23 00-0654)*

05 05 23 00-0798	EA	1" Diameter x 2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	22.76	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0799	EA	1" Diameter x 2-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	23.18	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-0800	EA	1" Diameter x 3" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	24.24	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-0801	EA	1" Diameter x 3-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	25.07	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-0802	EA	1" Diameter x 4" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	27.23	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0803	EA	1" Diameter x 4-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	27.65	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-0804	EA	1" Diameter x 5" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	28.88	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-0805	EA	1" Diameter x 5-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	29.26	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-0806	EA	1" Diameter x 6" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	29.71	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-0807	EA	1" Diameter x 6-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	33.88	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-0808	EA	1" Diameter x 7" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	34.92	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0809	EA	1" Diameter x 7-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	36.67	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0810	EA	1" Diameter x 8" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	38.39	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0811	EA	1" Diameter x 8-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	39.16	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0812	EA	1" Diameter x 9" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	40.56	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0813	EA	1" Diameter x 9-1/2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	41.63	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0814	EA	1" Diameter x 10" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Hex Head Bolt	43.20	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	

05 05 23 00-0815 304/18-8 Stainless Steel, Hex Head Bolts *(05 05 23 00-0097)*

05 05 23 00-0816 1/4" Diameter, 304/18-8 Stainless Steel, Hex Head Bolts *(05 05 23 00-0815)*

05 05 23 00-0817	EA	1/4" Diameter x 1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	9.36	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0818	EA	1/4" Diameter x 1" Length, 304/18-8 Stainless Steel, Hex Head Bolt	9.50	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0819	EA	1/4" Diameter x 1-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	9.67	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0820	EA	1/4" Diameter x 2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	9.86	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0821	EA	1/4" Diameter x 2-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	10.30	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0822	EA	1/4" Diameter x 3" Length, 304/18-8 Stainless Steel, Hex Head Bolt	10.59	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0823	EA	1/4" Diameter x 3-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	10.92	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0824	EA	1/4" Diameter x 4" Length, 304/18-8 Stainless Steel, Hex Head Bolt	11.42	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0825	EA	1/4" Diameter x 4-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	11.83	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0826	EA	1/4" Diameter x 5" Length, 304/18-8 Stainless Steel, Hex Head Bolt	12.19	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0827	EA	1/4" Diameter x 5-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	12.76	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0828	EA	1/4" Diameter x 6" Length, 304/18-8 Stainless Steel, Hex Head Bolt	13.38	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0829	EA	1/4" Diameter x 6-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	20.78	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0830	EA	1/4" Diameter x 7" Length, 304/18-8 Stainless Steel, Hex Head Bolt	24.64	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-0831	EA	1/4" Diameter x 7-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	24.99	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-0832	EA	1/4" Diameter x 8" Length, 304/18-8 Stainless Steel, Hex Head Bolt	25.82	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	

05 05 23 00-0833 5/16" Diameter, 304/18-8 Stainless Steel, Hex Head Bolts *(05 05 23 00-0815)*

05 05 23 00-0834	EA	5/16" Diameter x 1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	9.61	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0835	EA	5/16" Diameter x 1" Length, 304/18-8 Stainless Steel, Hex Head Bolt	9.74	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0836	EA	5/16" Diameter x 1-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	10.00	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0837	EA	5/16" Diameter x 2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	10.22	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0838	EA	5/16" Diameter x 2-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	10.87	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0839	EA	5/16" Diameter x 3" Length, 304/18-8 Stainless Steel, Hex Head Bolt	11.00	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0840	EA	5/16" Diameter x 3-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	11.69	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0841	EA	5/16" Diameter x 4" Length, 304/18-8 Stainless Steel, Hex Head Bolt	12.43	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0842	EA	5/16" Diameter x 4-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	13.20	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0843	EA	5/16" Diameter x 5" Length, 304/18-8 Stainless Steel, Hex Head Bolt	13.58	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0844	EA	5/16" Diameter x 5-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	15.02	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0845	EA	5/16" Diameter x 6" Length, 304/18-8 Stainless Steel, Hex Head Bolt	16.95	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0846	EA	5/16" Diameter x 6-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	21.36	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0847	EA	5/16" Diameter x 7" Length, 304/18-8 Stainless Steel, Hex Head Bolt	28.73	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	

05 05 23 00-0848 3/8" Diameter, 304/18-8 Stainless Steel, Hex Head Bolts *(05 05 23 00-0815)*

05 05 23 00-0849	EA	3/8" Diameter x 1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	9.94	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0850	EA	3/8" Diameter x 1" Length, 304/18-8 Stainless Steel, Hex Head Bolt	10.10	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0851	EA	3/8" Diameter x 1-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	10.52	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0852	EA	3/8" Diameter x 2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	11.05	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0853	EA	3/8" Diameter x 2-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	11.58	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0854	EA	3/8" Diameter x 3" Length, 304/18-8 Stainless Steel, Hex Head Bolt	12.00	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0855	EA	3/8" Diameter x 3-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	12.56	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0856	EA	3/8" Diameter x 4" Length, 304/18-8 Stainless Steel, Hex Head Bolt	13.31	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0857	EA	3/8" Diameter x 4-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	13.97	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0858	EA	3/8" Diameter x 5" Length, 304/18-8 Stainless Steel, Hex Head Bolt	15.42	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0859	EA	3/8" Diameter x 5-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	15.85	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0860	EA	3/8" Diameter x 6" Length, 304/18-8 Stainless Steel, Hex Head Bolt	17.05	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0861	EA	3/8" Diameter x 6-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	19.60	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-0862	EA	3/8" Diameter x 7" Length, 304/18-8 Stainless Steel, Hex Head Bolt	20.45	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-0863	EA	3/8" Diameter x 7-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	20.81	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-0864	EA	3/8" Diameter x 8" Length, 304/18-8 Stainless Steel, Hex Head Bolt	23.36	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	

05 05 23 00-0865 7/16" Diameter, 304/18-8 Stainless Steel, Hex Head Bolts *(05 05 23 00-0815)*

05 05 23 00-0866	EA	7/16" Diameter x 1" Length, 304/18-8 Stainless Steel, Hex Head Bolt	12.58	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0867	EA	7/16" Diameter x 1-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	12.75	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0868	EA	7/16" Diameter x 2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	13.43	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0869	EA	7/16" Diameter x 2-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	14.08	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0870	EA	7/16" Diameter x 3" Length, 304/18-8 Stainless Steel, Hex Head Bolt	14.89	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0871	EA	7/16" Diameter x 3-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	16.25	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0872	EA	7/16" Diameter x 4" Length, 304/18-8 Stainless Steel, Hex Head Bolt	17.12	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0873	EA	7/16" Diameter x 4-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	18.71	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0874	EA	7/16" Diameter x 5" Length, 304/18-8 Stainless Steel, Hex Head Bolt	19.40	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0875	EA	7/16" Diameter x 5-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	21.84	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0876	EA	7/16" Diameter x 6" Length, 304/18-8 Stainless Steel, Hex Head Bolt	24.25	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0877	EA	7/16" Diameter x 6-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	24.58	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0878	EA	7/16" Diameter x 7" Length, 304/18-8 Stainless Steel, Hex Head Bolt	25.12	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	

05 05 23 00-0879 1/2" Diameter, 304/18-8 Stainless Steel, Hex Head Bolts *(05 05 23 00-0815)*

05 05 23 00-0880	EA	1/2" Diameter x 1" Length, 304/18-8 Stainless Steel, Hex Head Bolt	12.56	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0881	EA	1/2" Diameter x 1-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	12.75	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0882	EA	1/2" Diameter x 2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	13.81	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0883	EA	1/2" Diameter x 2-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	14.49	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0884	EA	1/2" Diameter x 3" Length, 304/18-8 Stainless Steel, Hex Head Bolt	15.45	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0885	EA	1/2" Diameter x 3-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	15.98	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0886	EA	1/2" Diameter x 4" Length, 304/18-8 Stainless Steel, Hex Head Bolt	16.87	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0887	EA	1/2" Diameter x 4-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	17.34	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0888	EA	1/2" Diameter x 5" Length, 304/18-8 Stainless Steel, Hex Head Bolt	19.87	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0889	EA	1/2" Diameter x 5-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	20.83	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0890	EA	1/2" Diameter x 6" Length, 304/18-8 Stainless Steel, Hex Head Bolt	21.97	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0891	EA	1/2" Diameter x 6-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	23.26	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0892	EA	1/2" Diameter x 7" Length, 304/18-8 Stainless Steel, Hex Head Bolt	25.43	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-0893	EA	1/2" Diameter x 7-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	26.20	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-0894	EA	1/2" Diameter x 8" Length, 304/18-8 Stainless Steel, Hex Head Bolt	27.42	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-0895	EA	1/2" Diameter x 8-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	33.62	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0896	EA	1/2" Diameter x 9" Length, 304/18-8 Stainless Steel, Hex Head Bolt	34.11	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0897	EA	1/2" Diameter x 9-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	37.47	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0898	EA	1/2" Diameter x 10" Length, 304/18-8 Stainless Steel, Hex Head Bolt	40.81	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	

05 05 23 00-0899 9/16" Diameter, 304/18-8 Stainless Steel, Hex Head Bolts *(05 05 23 00-0815)*

05 05 23 00-0900	EA	9/16" Diameter x 1" Length, 304/18-8 Stainless Steel, Hex Head Bolt	18.12	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0901	EA	9/16" Diameter x 1-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	20.32	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0902	EA	9/16" Diameter x 2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	24.18	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-0903	EA	9/16" Diameter x 2-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	25.21	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0904	EA	9/16" Diameter x 3" Length, 304/18-8 Stainless Steel, Hex Head Bolt	26.58	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0905	EA	9/16" Diameter x 3-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	28.97	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-0906	EA	9/16" Diameter x 4" Length, 304/18-8 Stainless Steel, Hex Head Bolt	32.75	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0907	EA	9/16" Diameter x 4-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	33.29	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-0908	EA	9/16" Diameter x 5" Length, 304/18-8 Stainless Steel, Hex Head Bolt	38.35	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0909	EA	9/16" Diameter x 5-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	40.99	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-0910	EA	9/16" Diameter x 6" Length, 304/18-8 Stainless Steel, Hex Head Bolt	43.70	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	

05 05 23 00-0911 5/8" Diameter, 304/18-8 Stainless Steel, Hex Head Bolts *(05 05 23 00-0815)*

05 05 23 00-0912	EA	5/8" Diameter x 1" Length, 304/18-8 Stainless Steel, Hex Head Bolt	15.72	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0913	EA	5/8" Diameter x 1-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	16.22	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0914	EA	5/8" Diameter x 2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	18.33	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0915	EA	5/8" Diameter x 2-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	18.93	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-0916	EA	5/8" Diameter x 3" Length, 304/18-8 Stainless Steel, Hex Head Bolt	19.93	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-0917	EA	5/8" Diameter x 3-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	21.36	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-0918	EA	5/8" Diameter x 4" Length, 304/18-8 Stainless Steel, Hex Head Bolt	23.42	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-0919	EA	5/8" Diameter x 4-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	23.43	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-0920	EA	5/8" Diameter x 5" Length, 304/18-8 Stainless Steel, Hex Head Bolt	25.04	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-0921	EA	5/8" Diameter x 5-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	26.20	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0922	EA	5/8" Diameter x 6" Length, 304/18-8 Stainless Steel, Hex Head Bolt	27.64	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0923	EA	5/8" Diameter x 6-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	32.93	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0924	EA	5/8" Diameter x 7" Length, 304/18-8 Stainless Steel, Hex Head Bolt	36.09	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-0925	EA	5/8" Diameter x 7-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	38.49	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-0926	EA	5/8" Diameter x 8" Length, 304/18-8 Stainless Steel, Hex Head Bolt	39.57	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-0927	EA	5/8" Diameter x 8-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	44.26	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0928	EA	5/8" Diameter x 9" Length, 304/18-8 Stainless Steel, Hex Head Bolt	45.67	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0929	EA	5/8" Diameter x 9-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	51.96	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0930	EA	5/8" Diameter x 10" Length, 304/18-8 Stainless Steel, Hex Head Bolt	54.55	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	

05 05 23 00-0931 3/4" Diameter, 304/18-8 Stainless Steel, Hex Head Bolts *(05 05 23 00-0815)*

05 05 23 00-0932	EA	3/4" Diameter x 1" Length, 304/18-8 Stainless Steel, Hex Head Bolt	18.02	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0933	EA	3/4" Diameter x 1-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	19.00	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0934	EA	3/4" Diameter x 2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	20.30	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-0935	EA	3/4" Diameter x 2-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	21.96	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-0936	EA	3/4" Diameter x 3" Length, 304/18-8 Stainless Steel, Hex Head Bolt	23.39	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-0937	EA	3/4" Diameter x 3-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	25.80	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-0938	EA	3/4" Diameter x 4" Length, 304/18-8 Stainless Steel, Hex Head Bolt	27.49	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-0939	EA	3/4" Diameter x 4-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	29.73	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-0940	EA	3/4" Diameter x 5" Length, 304/18-8 Stainless Steel, Hex Head Bolt	31.53	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-0941	EA	3/4" Diameter x 5-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	33.63	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0942	EA	3/4" Diameter x 6" Length, 304/18-8 Stainless Steel, Hex Head Bolt	35.72	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0943	EA	3/4" Diameter x 6-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	39.64	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-0944	EA	3/4" Diameter x 7" Length, 304/18-8 Stainless Steel, Hex Head Bolt	50.30	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-0945	EA	3/4" Diameter x 7-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	53.63	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-0946	EA	3/4" Diameter x 8" Length, 304/18-8 Stainless Steel, Hex Head Bolt	60.73	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-0947	EA	3/4" Diameter x 8-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	61.33	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0948	EA	3/4" Diameter x 9" Length, 304/18-8 Stainless Steel, Hex Head Bolt	62.45	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0949	EA	3/4" Diameter x 9-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	65.48	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0950	EA	3/4" Diameter x 10" Length, 304/18-8 Stainless Steel, Hex Head Bolt	67.82	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0951		7/8" Diameter, 304/18-8 Stainless Steel, Hex Head Bolts *(05 05 23 00-0815)*		
05 05 23 00-0952	EA	7/8" Diameter x 1-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	25.49	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0953	EA	7/8" Diameter x 2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	27.94	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0954	EA	7/8" Diameter x 2-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	30.07	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-0955	EA	7/8" Diameter x 3" Length, 304/18-8 Stainless Steel, Hex Head Bolt	32.56	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-0956	EA	7/8" Diameter x 3-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	33.37	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-0957	EA	7/8" Diameter x 4" Length, 304/18-8 Stainless Steel, Hex Head Bolt	35.67	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-0958	EA	7/8" Diameter x 4-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	36.47	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-0959	EA	7/8" Diameter x 5" Length, 304/18-8 Stainless Steel, Hex Head Bolt	41.89	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-0960	EA	7/8" Diameter x 5-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	42.95	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-0961	EA	7/8" Diameter x 6" Length, 304/18-8 Stainless Steel, Hex Head Bolt	45.04	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-0962	EA	7/8" Diameter x 6-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	56.53	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-0963	EA	7/8" Diameter x 7" Length, 304/18-8 Stainless Steel, Hex Head Bolt	61.19	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0964	EA	7/8" Diameter x 7-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	66.35	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0965	EA	7/8" Diameter x 8" Length, 304/18-8 Stainless Steel, Hex Head Bolt	70.50	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0966	EA	7/8" Diameter x 8-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	83.36	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0967	EA	7/8" Diameter x 9" Length, 304/18-8 Stainless Steel, Hex Head Bolt	93.46	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0968	EA	7/8" Diameter x 9-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	98.13	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0969	EA	7/8" Diameter x 10" Length, 304/18-8 Stainless Steel, Hex Head Bolt	102.79	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0970		1" Diameter, 304/18-8 Stainless Steel, Hex Head Bolts *(05 05 23 00-0815)*		
05 05 23 00-0971	EA	1" Diameter x 1-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	31.44	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-0972	EA	1" Diameter x 2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	33.23	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0973	EA	1" Diameter x 2-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	36.15	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-0974	EA	1" Diameter x 3" Length, 304/18-8 Stainless Steel, Hex Head Bolt	38.41	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-0975	EA	1" Diameter x 3-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	42.12	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-0976	EA	1" Diameter x 4" Length, 304/18-8 Stainless Steel, Hex Head Bolt	46.55	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-0977	EA	1" Diameter x 4-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	49.13	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-0978	EA	1" Diameter x 5" Length, 304/18-8 Stainless Steel, Hex Head Bolt	52.96	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-0979	EA	1" Diameter x 5-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	56.80	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-0980	EA	1" Diameter x 6" Length, 304/18-8 Stainless Steel, Hex Head Bolt	57.01	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-0981	EA	1" Diameter x 6-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	67.27	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-0982	EA	1" Diameter x 7" Length, 304/18-8 Stainless Steel, Hex Head Bolt	80.50	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0983	EA	1" Diameter x 7-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	82.43	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0984	EA	1" Diameter x 8" Length, 304/18-8 Stainless Steel, Hex Head Bolt	84.37	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-0985	EA	1" Diameter x 8-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	88.48	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0986	EA	1" Diameter x 9" Length, 304/18-8 Stainless Steel, Hex Head Bolt	94.41	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0987	EA	1" Diameter x 9-1/2" Length, 304/18-8 Stainless Steel, Hex Head Bolt	121.31	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-0988	EA	1" Diameter x 10" Length, 304/18-8 Stainless Steel, Hex Head Bolt	152.65	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	

05 05 23 00-0989 316 Stainless Steel, Hex Head Bolts *(05 05 23 00-0097)*

05 05 23 00-0990 1/4" Diameter, 316 Stainless Steel, Hex Head Bolts *(05 05 23 00-0989)*

05 05 23 00-0991	EA	1/2" Length x 1/4" Diameter, 316 Stainless Steel, Hex Head Bolt	9.62	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0992	EA	1" Length x 1/4" Diameter, 316 Stainless Steel, Hex Head Bolt	9.91	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0993	EA	1-1/2" Length x 1/4" Diameter, 316 Stainless Steel, Hex Head Bolt	10.11	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-0994	EA	2" Length x 1/4" Diameter, 316 Stainless Steel, Hex Head Bolt	10.26	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-0995	EA	2-1/2" Length x 1/4" Diameter, 316 Stainless Steel, Hex Head Bolt	10.92	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0996	EA	3" Length x 1/4" Diameter, 316 Stainless Steel, Hex Head Bolt	11.29	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0997	EA	3-1/2" Length x 1/4" Diameter, 316 Stainless Steel, Hex Head Bolt	11.65	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-0998	EA	4" Length x 1/4" Diameter, 316 Stainless Steel, Hex Head Bolt	12.19	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-0999	EA	4-1/2" Length x 1/4" Diameter, 316 Stainless Steel, Hex Head Bolt	12.50	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-1000	EA	5" Length x 1/4" Diameter, 316 Stainless Steel, Hex Head Bolt	12.64	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-1001	EA	5-1/2" Length x 1/4" Diameter, 316 Stainless Steel, Hex Head Bolt	13.84	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-1002	EA	6" Length x 1/4" Diameter, 316 Stainless Steel, Hex Head Bolt	14.10	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-1003	EA	6-1/2" Length x 1/4" Diameter, 316 Stainless Steel, Hex Head Bolt	23.52	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-1004	EA	7" Length x 1/4" Diameter, 316 Stainless Steel, Hex Head Bolt	35.18	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-1005	EA	7-1/2" Length x 1/4" Diameter, 316 Stainless Steel, Hex Head Bolt	60.33	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-1006	EA	8" Length x 1/4" Diameter, 316 Stainless Steel, Hex Head Bolt	66.06	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	

05 05 23 00-1007 5/16" Diameter, 316 Stainless Steel, Hex Head Bolts *(05 05 23 00-0989)*

05 05 23 00-1008	EA	5/16" Diameter x 1/2" Length, 316 Stainless Steel, Hex Head Bolt	10.01	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-1009	EA	5/16" Diameter x 1" Length, 316 Stainless Steel, Hex Head Bolt	10.33	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-1010	EA	5/16" Diameter x 1-1/2" Length, 316 Stainless Steel, Hex Head Bolt	10.87	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-1011	EA	5/16" Diameter x 2" Length, 316 Stainless Steel, Hex Head Bolt	11.28	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-1012	EA	5/16" Diameter x 2-1/2" Length, 316 Stainless Steel, Hex Head Bolt	11.71	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-1013	EA	5/16" Diameter x 3" Length, 316 Stainless Steel, Hex Head Bolt	12.54	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-1014	EA	5/16" Diameter x 3-1/2" Length, 316 Stainless Steel, Hex Head Bolt	13.12	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-1015	EA	5/16" Diameter x 4" Length, 316 Stainless Steel, Hex Head Bolt	13.62	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-1016	EA	5/16" Diameter x 4-1/2" Length, 316 Stainless Steel, Hex Head Bolt	14.86	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-1017	EA	5/16" Diameter x 5" Length, 316 Stainless Steel, Hex Head Bolt	15.11	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-1018	EA	5/16" Diameter x 5-1/2" Length, 316 Stainless Steel, Hex Head Bolt	16.24	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-1019	EA	5/16" Diameter x 6" Length, 316 Stainless Steel, Hex Head Bolt	17.20	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-1020	EA	5/16" Diameter x 6-1/2" Length, 316 Stainless Steel, Hex Head Bolt	25.22	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-1021	EA	5/16" Diameter x 7" Length, 316 Stainless Steel, Hex Head Bolt	36.86	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	

05 05 23 00-1022 3/8" Diameter, 316 Stainless Steel, Hex Head Bolts *(05 05 23 00-0989)*

05 05 23 00-1023	EA	3/8" Diameter x 1/2" Length, 316 Stainless Steel, Hex Head Bolt	10.86	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-1024	EA	3/8" Diameter x 1" Length, 316 Stainless Steel, Hex Head Bolt	10.99	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-1025	EA	3/8" Diameter x 1-1/2" Length, 316 Stainless Steel, Hex Head Bolt	11.49	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-1026	EA	3/8" Diameter x 2" Length, 316 Stainless Steel, Hex Head Bolt	12.69	
		For >100 To 250, Deduct	*-1.80*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-2.70*	
05 05 23 00-1027	EA	3/8" Diameter x 2-1/2" Length, 316 Stainless Steel, Hex Head Bolt	13.37	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-1028	EA	3/8" Diameter x 3" Length, 316 Stainless Steel, Hex Head Bolt	13.59	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-1029	EA	3/8" Diameter x 3-1/2" Length, 316 Stainless Steel, Hex Head Bolt	14.63	
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.32*	
		For >500, Deduct	*-2.78*	
05 05 23 00-1030	EA	3/8" Diameter x 4" Length, 316 Stainless Steel, Hex Head Bolt	15.03	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-1031	EA	3/8" Diameter x 4-1/2" Length, 316 Stainless Steel, Hex Head Bolt	15.69	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-1032	EA	3/8" Diameter x 5" Length, 316 Stainless Steel, Hex Head Bolt	16.13	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.38*	
		For >500, Deduct	*-2.85*	
05 05 23 00-1033	EA	3/8" Diameter x 5-1/2" Length, 316 Stainless Steel, Hex Head Bolt	17.84	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-1034	EA	3/8" Diameter x 6" Length, 316 Stainless Steel, Hex Head Bolt	19.60	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-1035	EA	3/8" Diameter x 6-1/2" Length, 316 Stainless Steel, Hex Head Bolt	19.68	
		For >100 To 250, Deduct	*-1.95*	
		For >250 To 500, Deduct	*-2.44*	
		For >500, Deduct	*-2.93*	
05 05 23 00-1036	EA	3/8" Diameter x 7" Length, 316 Stainless Steel, Hex Head Bolt	24.39	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-1037	EA	3/8" Diameter x 7-1/2" Length, 316 Stainless Steel, Hex Head Bolt	31.65	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	
05 05 23 00-1038	EA	3/8" Diameter x 8" Length, 316 Stainless Steel, Hex Head Bolt	39.49	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-2.51*	
		For >500, Deduct	*-3.01*	

05 05 23 00-1039 7/16" Diameter, 316 Stainless Steel, Hex Head Bolts *(05 05 23 00-0989)*

05 05 23 00-1040	EA	7/16" Diameter x 1" Length, 316 Stainless Steel, Hex Head Bolt	14.14	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-1041	EA	7/16" Diameter x 1-1/2" Length, 316 Stainless Steel, Hex Head Bolt	14.90	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-1042	EA	7/16" Diameter x 2" Length, 316 Stainless Steel, Hex Head Bolt	16.30	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-1043	EA	7/16" Diameter x 2-1/2" Length, 316 Stainless Steel, Hex Head Bolt	17.77	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-1044	EA	7/16" Diameter x 3" Length, 316 Stainless Steel, Hex Head Bolt	19.12	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-1045	EA	7/16" Diameter x 3-1/2" Length, 316 Stainless Steel, Hex Head Bolt	21.34	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-1046	EA	7/16" Diameter x 4" Length, 316 Stainless Steel, Hex Head Bolt	23.73	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-1047	EA	7/16" Diameter x 4-1/2" Length, 316 Stainless Steel, Hex Head Bolt	24.11	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-1048	EA	7/16" Diameter x 5" Length, 316 Stainless Steel, Hex Head Bolt	24.93	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-1049	EA	7/16" Diameter x 5-1/2" Length, 316 Stainless Steel, Hex Head Bolt	25.74	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-1050	EA	7/16" Diameter x 6" Length, 316 Stainless Steel, Hex Head Bolt	26.32	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-1051	EA	7/16" Diameter x 6-1/2" Length, 316 Stainless Steel, Hex Head Bolt	26.90	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-1052	EA	7/16" Diameter x 7" Length, 316 Stainless Steel, Hex Head Bolt	27.61	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	

05 05 23 00-1053 1/2" Diameter, 316 Stainless Steel, Hex Head Bolts *(05 05 23 00-0989)*

05 05 23 00-1054	EA	1/2" Diameter x 1" Length, 316 Stainless Steel, Hex Head Bolt	14.10	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-1055	EA	1/2" Diameter x 1-1/2" Length, 316 Stainless Steel, Hex Head Bolt	14.91	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-1056	EA	1/2" Diameter x 2" Length, 316 Stainless Steel, Hex Head Bolt	16.05	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-1057	EA	1/2" Diameter x 2-1/2" Length, 316 Stainless Steel, Hex Head Bolt	17.66	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-1058	EA	1/2" Diameter x 3" Length, 316 Stainless Steel, Hex Head Bolt	18.91	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-1059	EA	1/2" Diameter x 3-1/2" Length, 316 Stainless Steel, Hex Head Bolt	19.22	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-1060	EA	1/2" Diameter x 4" Length, 316 Stainless Steel, Hex Head Bolt	20.00	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-1061	EA	1/2" Diameter x 4-1/2" Length, 316 Stainless Steel, Hex Head Bolt	22.42	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-1062	EA	1/2" Diameter x 5" Length, 316 Stainless Steel, Hex Head Bolt	27.32	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-1063	EA	1/2" Diameter x 5-1/2" Length, 316 Stainless Steel, Hex Head Bolt	27.96	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-1064	EA	1/2" Diameter x 6" Length, 316 Stainless Steel, Hex Head Bolt	28.73	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-1065	EA	1/2" Diameter x 6-1/2" Length, 316 Stainless Steel, Hex Head Bolt	34.79	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-1066	EA	1/2" Diameter x 7" Length, 316 Stainless Steel, Hex Head Bolt	39.10	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-1067	EA	1/2" Diameter x 7-1/2" Length, 316 Stainless Steel, Hex Head Bolt	41.72	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-1068	EA	1/2" Diameter x 8" Length, 316 Stainless Steel, Hex Head Bolt	46.07	
		For >100 To 250, Deduct	*-2.26*	
		For >250 To 500, Deduct	*-2.83*	
		For >500, Deduct	*-3.39*	
05 05 23 00-1069	EA	1/2" Diameter x 8-1/2" Length, 316 Stainless Steel, Hex Head Bolt	57.82	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-1070	EA	1/2" Diameter x 9" Length, 316 Stainless Steel, Hex Head Bolt	65.24	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-1071	EA	1/2" Diameter x 9-1/2" Length, 316 Stainless Steel, Hex Head Bolt	66.45	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-1072	EA	1/2" Diameter x 10" Length, 316 Stainless Steel, Hex Head Bolt	68.34	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	

05 05 23 00-1073 9/16" Diameter, 316 Stainless Steel, Hex Head Bolts *(05 05 23 00-0989)*

05 05 23 00-1074	EA	9/16" Diameter x 1" Length, 316 Stainless Steel, Hex Head Bolt	34.42	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-1075	EA	9/16" Diameter x 1-1/2" Length, 316 Stainless Steel, Hex Head Bolt	37.08	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-1076	EA	9/16" Diameter x 2" Length, 316 Stainless Steel, Hex Head Bolt	46.01	
		For >100 To 250, Deduct	*-2.06*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.08*	
05 05 23 00-1077	EA	9/16" Diameter x 2-1/2" Length, 316 Stainless Steel, Hex Head Bolt	51.26	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-1078	EA	9/16" Diameter x 3" Length, 316 Stainless Steel, Hex Head Bolt	56.53	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-1079	EA	9/16" Diameter x 3-1/2" Length, 316 Stainless Steel, Hex Head Bolt	61.80	
		For >100 To 250, Deduct	*-2.11*	
		For >250 To 500, Deduct	*-2.63*	
		For >500, Deduct	*-3.16*	
05 05 23 00-1080	EA	9/16" Diameter x 4" Length, 316 Stainless Steel, Hex Head Bolt	65.34	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-1081	EA	9/16" Diameter x 4-1/2" Length, 316 Stainless Steel, Hex Head Bolt	69.69	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-1082	EA	9/16" Diameter x 5" Length, 316 Stainless Steel, Hex Head Bolt	73.55	
		For >100 To 250, Deduct	*-2.16*	
		For >250 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.24*	
05 05 23 00-1083	EA	9/16" Diameter x 5-1/2" Length, 316 Stainless Steel, Hex Head Bolt	74.98	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	
05 05 23 00-1084	EA	9/16" Diameter x 6" Length, 316 Stainless Steel, Hex Head Bolt	78.38	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-2.77*	
		For >500, Deduct	*-3.32*	

05 05 23 00-1085 5/8" Diameter, 316 Stainless Steel, Hex Head Bolts *(05 05 23 00-0989)*

05 05 23 00-1086	EA	5/8" Diameter x 1" Length, 316 Stainless Steel, Hex Head Bolt	19.53	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-1087	EA	5/8" Diameter x 1-1/2" Length, 316 Stainless Steel, Hex Head Bolt	19.76	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-1088	EA	5/8" Diameter x 2" Length, 316 Stainless Steel, Hex Head Bolt	19.84	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-1089	EA	5/8" Diameter x 2-1/2" Length, 316 Stainless Steel, Hex Head Bolt	21.61	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-1090	EA	5/8" Diameter x 3" Length, 316 Stainless Steel, Hex Head Bolt	23.17	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-1091	EA	5/8" Diameter x 3-1/2" Length, 316 Stainless Steel, Hex Head Bolt	28.14	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-1092	EA	5/8" Diameter x 4" Length, 316 Stainless Steel, Hex Head Bolt	29.44	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-1093	EA	5/8" Diameter x 4-1/2" Length, 316 Stainless Steel, Hex Head Bolt	33.79	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-1094	EA	5/8" Diameter x 5" Length, 316 Stainless Steel, Hex Head Bolt	35.29	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-1095	EA	5/8" Diameter x 5-1/2" Length, 316 Stainless Steel, Hex Head Bolt	38.40	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-1096	EA	5/8" Diameter x 6" Length, 316 Stainless Steel, Hex Head Bolt	39.64	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-1097	EA	5/8" Diameter x 6-1/2" Length, 316 Stainless Steel, Hex Head Bolt	47.24	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-1098	EA	5/8" Diameter x 7" Length, 316 Stainless Steel, Hex Head Bolt	50.25	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-1099	EA	5/8" Diameter x 7-1/2" Length, 316 Stainless Steel, Hex Head Bolt	51.21	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-1100	EA	5/8" Diameter x 8" Length, 316 Stainless Steel, Hex Head Bolt	54.77	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-1101	EA	5/8" Diameter x 8-1/2" Length, 316 Stainless Steel, Hex Head Bolt	58.24	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-1102	EA	5/8" Diameter x 9" Length, 316 Stainless Steel, Hex Head Bolt	61.25	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-1103	EA	5/8" Diameter x 9-1/2" Length, 316 Stainless Steel, Hex Head Bolt	75.62	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-1104	EA	5/8" Diameter x 10" Length, 316 Stainless Steel, Hex Head Bolt	90.97	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	

05 05 23 00-1105 3/4" Diameter, 316 Stainless Steel, Hex Head Bolts *(05 05 23 00-0989)*

05 05 23 00-1106	EA	3/4" Diameter x 1" Length, 316 Stainless Steel, Hex Head Bolt	25.57	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-1107	EA	3/4" Diameter x 1-1/2" Length, 316 Stainless Steel, Hex Head Bolt	26.11	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-1108	EA	3/4" Diameter x 2" Length, 316 Stainless Steel, Hex Head Bolt	28.18	
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-2.89*	
		For >500, Deduct	*-3.47*	
05 05 23 00-1109	EA	3/4" Diameter x 2-1/2" Length, 316 Stainless Steel, Hex Head Bolt	30.24	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-1110	EA	3/4" Diameter x 3" Length, 316 Stainless Steel, Hex Head Bolt	34.10	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-1111	EA	3/4" Diameter x 3-1/2" Length, 316 Stainless Steel, Hex Head Bolt	36.34	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-3.55*	
05 05 23 00-1112	EA	3/4" Diameter x 4" Length, 316 Stainless Steel, Hex Head Bolt	41.37	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-1113	EA	3/4" Diameter x 4-1/2" Length, 316 Stainless Steel, Hex Head Bolt	43.34	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-1114	EA	3/4" Diameter x 5" Length, 316 Stainless Steel, Hex Head Bolt	44.43	
		For >100 To 250, Deduct	*-2.42*	
		For >250 To 500, Deduct	*-3.02*	
		For >500, Deduct	*-3.62*	
05 05 23 00-1115	EA	3/4" Diameter x 5-1/2" Length, 316 Stainless Steel, Hex Head Bolt	46.12	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-1116	EA	3/4" Diameter x 6" Length, 316 Stainless Steel, Hex Head Bolt	48.60	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-1117	EA	3/4" Diameter x 6-1/2" Length, 316 Stainless Steel, Hex Head Bolt	56.20	
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.08*	
		For >500, Deduct	*-3.70*	
05 05 23 00-1118	EA	3/4" Diameter x 7" Length, 316 Stainless Steel, Hex Head Bolt	67.47	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-1119	EA	3/4" Diameter x 7-1/2" Length, 316 Stainless Steel, Hex Head Bolt	76.05	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	
05 05 23 00-1120	EA	3/4" Diameter x 8" Length, 316 Stainless Steel, Hex Head Bolt	77.34	
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.15*	
		For >500, Deduct	*-3.78*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-1121	EA	3/4" Diameter x 8-1/2" Length, 316 Stainless Steel, Hex Head Bolt	82.77	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-1122	EA	3/4" Diameter x 9" Length, 316 Stainless Steel, Hex Head Bolt	95.76	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-1123	EA	3/4" Diameter x 9-1/2" Length, 316 Stainless Steel, Hex Head Bolt	96.86	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-1124	EA	3/4" Diameter x 10" Length, 316 Stainless Steel, Hex Head Bolt	99.60	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	

05 05 23 00-1125 7/8" Diameter, 316 Stainless Steel, Hex Head Bolts *(05 05 23 00-0989)*

05 05 23 00-1126	EA	7/8" Diameter x 1-1/2" Length, 316 Stainless Steel, Hex Head Bolt	28.83	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-1127	EA	7/8" Diameter x 2" Length, 316 Stainless Steel, Hex Head Bolt	32.40	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-1128	EA	7/8" Diameter x 2-1/2" Length, 316 Stainless Steel, Hex Head Bolt	34.60	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-1129	EA	7/8" Diameter x 3" Length, 316 Stainless Steel, Hex Head Bolt	39.60	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-1130	EA	7/8" Diameter x 3-1/2" Length, 316 Stainless Steel, Hex Head Bolt	41.84	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-1131	EA	7/8" Diameter x 4" Length, 316 Stainless Steel, Hex Head Bolt	44.07	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-1132	EA	7/8" Diameter x 4-1/2" Length, 316 Stainless Steel, Hex Head Bolt	47.11	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-1133	EA	7/8" Diameter x 5" Length, 316 Stainless Steel, Hex Head Bolt	53.92	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-1134	EA	7/8" Diameter x 5-1/2" Length, 316 Stainless Steel, Hex Head Bolt	54.35	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-1135	EA	7/8" Diameter x 6" Length, 316 Stainless Steel, Hex Head Bolt	56.61	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-1136	EA	7/8" Diameter x 6-1/2" Length, 316 Stainless Steel, Hex Head Bolt	75.69	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-1137	EA	7/8" Diameter x 7" Length, 316 Stainless Steel, Hex Head Bolt	84.37	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-1138	EA	7/8" Diameter x 7-1/2" Length, 316 Stainless Steel, Hex Head Bolt	93.42	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-1139	EA	7/8" Diameter x 8" Length, 316 Stainless Steel, Hex Head Bolt	97.88	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-1140	EA	7/8" Diameter x 8-1/2" Length, 316 Stainless Steel, Hex Head Bolt	103.93	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-1141	EA	7/8" Diameter x 9" Length, 316 Stainless Steel, Hex Head Bolt	107.81	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-1142	EA	7/8" Diameter x 9-1/2" Length, 316 Stainless Steel, Hex Head Bolt	111.65	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-1143	EA	7/8" Diameter x 10" Length, 316 Stainless Steel, Hex Head Bolt	115.98	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-1144		1" Diameter, 316 Stainless Steel, Hex Head Bolts *(05 05 23 00-0989)*		
05 05 23 00-1145	EA	1" Diameter x 2" Length, 316 Stainless Steel, Hex Head Bolt	36.69	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-3.22*	
		For >500, Deduct	*-3.86*	
05 05 23 00-1146	EA	1" Diameter x 2-1/2" Length, 316 Stainless Steel, Hex Head Bolt	42.44	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-1147	EA	1" Diameter x 3" Length, 316 Stainless Steel, Hex Head Bolt	46.13	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-1148	EA	1" Diameter x 3-1/2" Length, 316 Stainless Steel, Hex Head Bolt	52.02	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-3.93*	
05 05 23 00-1149	EA	1" Diameter x 4" Length, 316 Stainless Steel, Hex Head Bolt	54.39	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-1150	EA	1" Diameter x 4-1/2" Length, 316 Stainless Steel, Hex Head Bolt	58.38	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-1151	EA	1" Diameter x 5" Length, 316 Stainless Steel, Hex Head Bolt	62.42	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.34*	
		For >500, Deduct	*-4.01*	
05 05 23 00-1152	EA	1" Diameter x 5-1/2" Length, 316 Stainless Steel, Hex Head Bolt	66.73	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-1153	EA	1" Diameter x 6" Length, 316 Stainless Steel, Hex Head Bolt	77.15	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-1154	EA	1" Diameter x 6-1/2" Length, 316 Stainless Steel, Hex Head Bolt	87.43	
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.09*	
05 05 23 00-1155	EA	1" Diameter x 7" Length, 316 Stainless Steel, Hex Head Bolt	101.75	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-1156	EA	1" Diameter x 7-1/2" Length, 316 Stainless Steel, Hex Head Bolt	113.56	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-1157	EA	1" Diameter x 8" Length, 316 Stainless Steel, Hex Head Bolt	115.26	
		For >100 To 250, Deduct	*-2.78*	
		For >250 To 500, Deduct	*-3.47*	
		For >500, Deduct	*-4.16*	
05 05 23 00-1158	EA	1" Diameter x 8-1/2" Length, 316 Stainless Steel, Hex Head Bolt	119.37	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-1159	EA	1" Diameter x 9" Length, 316 Stainless Steel, Hex Head Bolt	121.00	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-1160	EA	1" Diameter x 9-1/2" Length, 316 Stainless Steel, Hex Head Bolt	140.62	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-1161	EA	1" Diameter x 10" Length, 316 Stainless Steel, Hex Head Bolt	159.56	
		For >100 To 250, Deduct	*-2.83*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-4.24*	
05 05 23 00-1162		Screws *(05 05 23)*		
05 05 23 00-1163		Teks® 5 Self Drilling Screws *(05 05 23 00-1162)*		
		Note: Includes Climaseal® finish, self-drill point and tapping threads.		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-1164	EA	12-24 x 1-1/4", Hex Washer Head, Teks® 5 Self Drilling Screw	4.83	
		For >10 To 50, Deduct	*-0.21*	
		For >50 To 100, Deduct	*-0.44*	
		For >100, Deduct	*-0.88*	
05 05 23 00-1165	EA	12-24 x 1-1/2", Hex Washer Head, Teks® 5 Self Drilling Screw	5.03	
		For >10 To 50, Deduct	*-0.21*	
		For >50 To 100, Deduct	*-0.45*	
		For >100, Deduct	*-0.89*	
05 05 23 00-1166	EA	12-24 x 2", Hex Washer Head, Teks® 5 Self Drilling Screw	5.60	
		For >10 To 50, Deduct	*-0.23*	
		For >50 To 100, Deduct	*-0.48*	
		For >100, Deduct	*-0.97*	
05 05 23 00-1167	EA	1/4" x 3", 28 TPI, Hex Washer Head, Teks® 5 Self Drilling Screw	7.67	
		For >10 To 50, Deduct	*-0.29*	
		For >50 To 100, Deduct	*-0.62*	
		For >100, Deduct	*-1.24*	
05 05 23 00-1168	EA	1/4" x 4", 28 TPI, Hex Washer Head, Teks® 5 Self Drilling Screw	8.19	
		For >10 To 50, Deduct	*-0.30*	
		For >50 To 100, Deduct	*-0.65*	
		For >100, Deduct	*-1.31*	
05 05 23 00-1169	EA	1/4" x 6", 28 TPI, Hex Washer Head, Teks® 5 Self Drilling Screw	10.06	
		For >10 To 50, Deduct	*-0.31*	
		For >50 To 100, Deduct	*-0.72*	
		For >100, Deduct	*-1.45*	
05 05 23 00-1170	EA	1/4" x 8", 28 TPI, Hex Washer Head, Teks® 5 Self Drilling Screw	11.23	
		For >10 To 50, Deduct	*-0.33*	
		For >50 To 100, Deduct	*-0.77*	
		For >100, Deduct	*-1.55*	

05 05 23 00-1171 Security Screws *(05 05 23 00-1162)*

05 05 23 00-1172 304/18-8 Stainless Steel, Security Screws *(05 05 23 00-1171)*

Note: Includes "security" style drive in machine or sheet metal screw threads.

05 05 23 00-1173	EA	#4 Diameter x 1/2" Length, 304/18-8 Stainless Steel, Security Screws	3.80	
		For >10 To 50, Deduct	*-0.18*	
		For >50 To 100, Deduct	*-0.36*	
		For >100, Deduct	*-0.73*	
05 05 23 00-1174	EA	#6 Diameter x 1/2" Length, 304/18-8 Stainless Steel, Security Screw	4.35	
		For >10 To 50, Deduct	*-0.18*	
		For >50 To 100, Deduct	*-0.38*	
		For >100, Deduct	*-0.76*	
05 05 23 00-1175	EA	#6 Diameter x 1" Length, 304/18-8 Stainless Steel, Security Screw	4.83	
		For >10 To 50, Deduct	*-0.18*	
		For >50 To 100, Deduct	*-0.39*	
		For >100, Deduct	*-0.78*	
05 05 23 00-1176	EA	#6 Diameter x 1-1/2" Length, 304/18-8 Stainless Steel, Security Screw	4.99	
		For >10 To 50, Deduct	*-0.18*	
		For >50 To 100, Deduct	*-0.39*	
		For >100, Deduct	*-0.79*	
05 05 23 00-1177	EA	#6 Diameter x 2" Length, 304/18-8 Stainless Steel, Security Screw	5.30	
		For >10 To 50, Deduct	*-0.18*	
		For >50 To 100, Deduct	*-0.40*	
		For >100, Deduct	*-0.80*	
05 05 23 00-1178	EA	#8 Diameter x 1/2" Length, 304/18-8 Stainless Steel, Security Screw	4.48	
		For >10 To 50, Deduct	*-0.18*	
		For >50 To 100, Deduct	*-0.38*	
		For >100, Deduct	*-0.76*	
05 05 23 00-1179	EA	#8 Diameter x 1" Length, 304/18-8 Stainless Steel, Security Screw	4.70	
		For >10 To 50, Deduct	*-0.18*	
		For >50 To 100, Deduct	*-0.39*	
		For >100, Deduct	*-0.77*	
05 05 23 00-1180	EA	#8 Diameter x 1-1/2" Length, 304/18-8 Stainless Steel, Security Screw	5.18	
		For >10 To 50, Deduct	*-0.18*	
		For >50 To 100, Deduct	*-0.40*	
		For >100, Deduct	*-0.80*	
05 05 23 00-1181	EA	#8 Diameter x 2" Length, 304/18-8 Stainless Steel, Security Screw	5.32	
		For >10 To 50, Deduct	*-0.18*	
		For >50 To 100, Deduct	*-0.40*	
		For >100, Deduct	*-0.80*	
05 05 23 00-1182	EA	#10 Diameter x 1/2" Length, 304/18-8 Stainless Steel, Security Screw	4.62	
		For >10 To 50, Deduct	*-0.18*	
		For >50 To 100, Deduct	*-0.38*	
		For >100, Deduct	*-0.77*	
05 05 23 00-1183	EA	#10 Diameter x 1" Length, 304/18-8 Stainless Steel, Security Screw	4.68	
		For >10 To 50, Deduct	*-0.18*	
		For >50 To 100, Deduct	*-0.39*	
		For >100, Deduct	*-0.77*	
05 05 23 00-1184	EA	#10 Diameter x 1-1/2" Length, 304/18-8 Stainless Steel, Security Screw	4.89	
		For >10 To 50, Deduct	*-0.18*	
		For >50 To 100, Deduct	*-0.39*	
		For >100, Deduct	*-0.78*	
05 05 23 00-1185	EA	#10 Diameter x 2" Length, 304/18-8 Stainless Steel, Security Screw	5.53	
		For >10 To 50, Deduct	*-0.18*	
		For >50 To 100, Deduct	*-0.41*	
		For >100, Deduct	*-0.82*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-1186	EA	1/4" Diameter x 1/2" Length, 304/18-8 Stainless Steel, Security Screw	4.99	
		For >10 To 50, Deduct	*-0.18*	
		For >50 To 100, Deduct	*-0.39*	
		For >100, Deduct	*-0.79*	
05 05 23 00-1187	EA	1/4" Diameter x 1" Length, 304/18-8 Stainless Steel, Security Screw	5.13	
		For >10 To 50, Deduct	*-0.18*	
		For >50 To 100, Deduct	*-0.40*	
		For >100, Deduct	*-0.80*	
05 05 23 00-1188	EA	1/4" Diameter x 1-1/2" Length, 304/18-8 Stainless Steel, Security Screw	5.75	
		For >10 To 50, Deduct	*-0.18*	
		For >50 To 100, Deduct	*-0.41*	
		For >100, Deduct	*-0.83*	
05 05 23 00-1189	EA	1/4" Diameter x 2" Length, 304/18-8 Stainless Steel, Security Screw	6.72	
		For >10 To 50, Deduct	*-0.18*	
		For >50 To 100, Deduct	*-0.44*	
		For >100, Deduct	*-0.87*	

05 05 23 00-1190 Threaded Rod *(05 05 23)*

Note: Fully threaded. See CSI section 05 05 19 00-0169 for anchoring adhesive, 05 05 23 00-1283 for nuts and washers.

05 05 23 00-1191 Plain Finish Steel, Low Carbon Threaded Rod *(05 05 23 00-1190)*

05 05 23 00-1192	LF	1/4" Diameter, Plain Finish Steel, Low Carbon Threaded Rod	2.18	0.59
		For Left Hand Threaded Rod, Add	*0.10*	
05 05 23 00-1193	LF	5/16" Diameter, Plain Finish Steel, Low Carbon Threaded Rod	2.80	0.65
		For Left Hand Threaded Rod, Add	*0.15*	
05 05 23 00-1194	LF	3/8" Diameter, Plain Finish Steel, Low Carbon Threaded Rod	3.24	0.76
		For Left Hand Threaded Rod, Add	*0.17*	
05 05 23 00-1195	LF	7/16" Diameter, Plain Finish Steel, Low Carbon Threaded Rod	4.25	0.78
		For Left Hand Threaded Rod, Add	*0.27*	
05 05 23 00-1196	LF	1/2" Diameter, Plain Finish Steel, Low Carbon Threaded Rod	4.36	0.81
		For Left Hand Threaded Rod, Add	*0.28*	
05 05 23 00-1197	LF	9/16" Diameter, Plain Finish Steel, Low Carbon Threaded Rod	5.32	0.82
		For Left Hand Threaded Rod, Add	*0.37*	
05 05 23 00-1198	LF	5/8" Diameter, Plain Finish Steel, Low Carbon Threaded Rod	5.95	0.83
		For Left Hand Threaded Rod, Add	*0.43*	
05 05 23 00-1199	LF	3/4" Diameter, Plain Finish Steel, Low Carbon Threaded Rod	9.51	0.85
		For Left Hand Threaded Rod, Add	*0.78*	
05 05 23 00-1200	LF	7/8" Diameter, Plain Finish Steel, Low Carbon Threaded Rod	10.34	0.88
		For Left Hand Threaded Rod, Add	*0.86*	
05 05 23 00-1201	LF	1" Diameter, Plain Finish Steel, Low Carbon Threaded Rod	14.03	1.00
		For Left Hand Threaded Rod, Add	*1.20*	
05 05 23 00-1202	LF	1-1/8" Diameter, Plain Finish Steel, Low Carbon Threaded Rod	17.41	1.11
		For Left Hand Threaded Rod, Add	*1.52*	
05 05 23 00-1203	LF	1-1/4" Diameter, Plain Finish Steel, Low Carbon Threaded Rod	22.99	1.20
		For Left Hand Threaded Rod, Add	*2.05*	
05 05 23 00-1204	LF	1-3/8" Diameter, Plain Finish Steel, Low Carbon Threaded Rod	28.48	1.30
		For Left Hand Threaded Rod, Add	*2.59*	
05 05 23 00-1205	LF	1-1/2" Diameter, Plain Finish Steel, Low Carbon Threaded Rod	33.96	1.36
		For Left Hand Threaded Rod, Add	*3.12*	
05 05 23 00-1206	LF	1-3/4" Diameter, Plain Finish Steel, Low Carbon Threaded Rod	41.52	1.43
		For Left Hand Threaded Rod, Add	*3.87*	
05 05 23 00-1207	LF	2" Diameter, Plain Finish Steel, Low Carbon Threaded Rod	52.88	1.50
		For Left Hand Threaded Rod, Add	*4.99*	

05 05 23 00-1208 Zinc Plated Steel, Low Carbon Threaded Rod *(05 05 23 00-1190)*

05 05 23 00-1209	LF	1/4" Diameter, Zinc Plated Steel, Low Carbon Threaded Rod	2.19	0.59
		For Left Hand Threaded Rod, Add	*0.10*	
05 05 23 00-1210	LF	5/16" Diameter, Zinc Plated Steel, Low Carbon Threaded Rod	3.13	0.65
		For Left Hand Threaded Rod, Add	*0.18*	
05 05 23 00-1211	LF	3/8" Diameter, Zinc Plated Steel, Low Carbon Threaded Rod	3.49	0.76
		For Left Hand Threaded Rod, Add	*0.20*	
05 05 23 00-1212	LF	7/16" Diameter, Zinc Plated Steel, Low Carbon Threaded Rod	4.86	0.78
		For Left Hand Threaded Rod, Add	*0.33*	
05 05 23 00-1213	LF	1/2" Diameter, Zinc Plated Steel, Low Carbon Threaded Rod	5.22	0.81
		For Left Hand Threaded Rod, Add	*0.36*	
05 05 23 00-1214	LF	9/16" Diameter, Zinc Plated Steel, Low Carbon Threaded Rod	6.72	0.82
		For Left Hand Threaded Rod, Add	*0.51*	
05 05 23 00-1215	LF	5/8" Diameter, Zinc Plated Steel, Low Carbon Threaded Rod	7.12	0.83
		For Left Hand Threaded Rod, Add	*0.55*	
05 05 23 00-1216	LF	3/4" Diameter, Zinc Plated Steel, Low Carbon Threaded Rod	10.51	0.85
		For Left Hand Threaded Rod, Add	*0.88*	
05 05 23 00-1217	LF	7/8" Diameter, Zinc Plated Steel, Low Carbon Threaded Rod	13.50	0.88
		For Left Hand Threaded Rod, Add	*1.17*	
05 05 23 00-1218	LF	1" Diameter, Zinc Plated Steel, Low Carbon Threaded Rod	18.03	1.00
		For Left Hand Threaded Rod, Add	*1.60*	
05 05 23 00-1219	LF	1-1/8" Diameter, Zinc Plated Steel, Low Carbon Threaded Rod	23.19	1.11
		For Left Hand Threaded Rod, Add	*2.10*	
05 05 23 00-1220	LF	1-1/4" Diameter, Zinc Plated Steel, Low Carbon Threaded Rod	27.63	1.20
		For Left Hand Threaded Rod, Add	*2.51*	
05 05 23 00-1221	LF	1-3/8" Diameter, Zinc Plated Steel, Low Carbon Threaded Rod	31.36	1.30
		For Left Hand Threaded Rod, Add	*2.88*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-1222	LF	1-1/2" Diameter, Zinc Plated Steel, Low Carbon Threaded Rod	39.34	1.36
		For Left Hand Threaded Rod, Add	*3.66*	
05 05 23 00-1223	LF	1-3/4" Diameter, Zinc Plated Steel, Low Carbon Threaded Rod	48.61	1.43
		For Left Hand Threaded Rod, Add	*4.58*	
05 05 23 00-1224	LF	2" Diameter, Zinc Plated Steel, Low Carbon Threaded Rod	70.64	1.50
		For Left Hand Threaded Rod, Add	*6.77*	

05 05 23 00-1225 Hot Dipped Galvanized Steel, Low Carbon Threaded Rod *(05 05 23 00-1190)*

05 05 23 00-1226	LF	3/8" Diameter, Hot Dipped Galvanized Steel, Low Carbon Threaded Rod	5.50	0.76
		For Left Hand Threaded Rod, Add	*0.40*	
05 05 23 00-1227	LF	1/2" Diameter, Hot Dipped Galvanized Steel, Low Carbon Threaded Rod	7.57	0.81
		For Left Hand Threaded Rod, Add	*0.60*	
05 05 23 00-1228	LF	5/8" Diameter, Hot Dipped Galvanized Steel, Low Carbon Threaded Rod	10.09	0.83
		For Left Hand Threaded Rod, Add	*0.84*	
05 05 23 00-1229	LF	3/4" Diameter, Hot Dipped Galvanized Steel, Low Carbon Threaded Rod	13.72	0.85
		For Left Hand Threaded Rod, Add	*1.20*	
05 05 23 00-1230	LF	7/8" Diameter, Hot Dipped Galvanized Steel, Low Carbon Threaded Rod	18.84	0.88
		For Left Hand Threaded Rod, Add	*1.71*	
05 05 23 00-1231	LF	1" Diameter, Hot Dipped Galvanized Steel, Low Carbon Threaded Rod	24.23	1.00
		For Left Hand Threaded Rod, Add	*2.22*	
05 05 23 00-1232	LF	1-1/8" Diameter, Hot Dipped Galvanized Steel, Low Carbon Threaded Rod	31.79	1.11
		For Left Hand Threaded Rod, Add	*2.96*	
05 05 23 00-1233	LF	1-1/4" Diameter, Hot Dipped Galvanized Steel, Low Carbon Threaded Rod	41.70	1.20
		For Left Hand Threaded Rod, Add	*3.92*	
05 05 23 00-1234	LF	1-3/8" Diameter, Hot Dipped Galvanized Steel, Low Carbon Threaded Rod	46.56	1.30
		For Left Hand Threaded Rod, Add	*4.40*	
05 05 23 00-1235	LF	1-1/2" Diameter, Hot Dipped Galvanized Steel, Low Carbon Threaded Rod	55.32	1.36
		For Left Hand Threaded Rod, Add	*5.26*	
05 05 23 00-1236	LF	1-3/4" Diameter, Hot Dipped Galvanized Steel, Low Carbon Threaded Rod	67.10	1.43
		For Left Hand Threaded Rod, Add	*6.43*	
05 05 23 00-1237	LF	2" Diameter, Hot Dipped Galvanized Steel, Low Carbon Threaded Rod	116.63	1.50
		For Left Hand Threaded Rod, Add	*11.36*	

05 05 23 00-1238 304/18-8 Stainless Steel Threaded Rod *(05 05 23 00-1190)*

05 05 23 00-1239	LF	1/4" Diameter, 304/18-8 Stainless Steel Threaded Rod	4.12	0.59
		For Left Hand Threaded Rod, Add	*0.29*	
05 05 23 00-1240	LF	5/16" Diameter, 304/18-8 Stainless Steel Threaded Rod	6.31	0.65
		For Left Hand Threaded Rod, Add	*0.50*	
05 05 23 00-1241	LF	3/8" Diameter, 304/18-8 Stainless Steel Threaded Rod	8.15	0.76
		For Left Hand Threaded Rod, Add	*0.67*	
05 05 23 00-1242	LF	7/16" Diameter, 304/18-8 Stainless Steel Threaded Rod	11.44	0.78
		For Left Hand Threaded Rod, Add	*0.99*	
05 05 23 00-1243	LF	1/2" Diameter, 304/18-8 Stainless Steel Threaded Rod	13.78	0.81
		For Left Hand Threaded Rod, Add	*1.22*	
05 05 23 00-1244	LF	9/16" Diameter, 304/18-8 Stainless Steel Threaded Rod	19.97	0.82
		For Left Hand Threaded Rod, Add	*1.84*	
05 05 23 00-1245	LF	5/8" Diameter, 304/18-8 Stainless Steel Threaded Rod	20.86	0.83
		For Left Hand Threaded Rod, Add	*1.92*	
05 05 23 00-1246	LF	3/4" Diameter, 304/18-8 Stainless Steel Threaded Rod	29.35	0.85
		For Left Hand Threaded Rod, Add	*2.77*	
05 05 23 00-1247	LF	7/8" Diameter, 304/18-8 Stainless Steel Threaded Rod	40.51	0.88
		For Left Hand Threaded Rod, Add	*3.88*	
05 05 23 00-1248	LF	1" Diameter, 304/18-8 Stainless Steel Threaded Rod	52.02	1.00
		For Left Hand Threaded Rod, Add	*5.00*	
05 05 23 00-1249	LF	1-1/4" Diameter, 304/18-8 Stainless Steel Threaded Rod	110.51	1.20
		For Left Hand Threaded Rod, Add	*10.80*	
05 05 23 00-1250	LF	1-1/2" Diameter, 304/18-8 Stainless Steel Threaded Rod	168.51	1.36
		For Left Hand Threaded Rod, Add	*16.58*	
05 05 23 00-1251	LF	1-3/4" Diameter, 304/18-8 Stainless Steel Threaded Rod	173.32	1.43
		For Left Hand Threaded Rod, Add	*17.05*	
05 05 23 00-1252	LF	2" Diameter, 304/18-8 Stainless Steel Threaded Rod	240.04	1.50
		For Left Hand Threaded Rod, Add	*23.71*	

05 05 23 00-1253 316 Stainless Steel Threaded Rod *(05 05 23 00-1190)*

05 05 23 00-1254	LF	1/4" Diameter, 316 Stainless Steel Threaded Rod	6.08	0.59
		For Left Hand Threaded Rod, Add	*0.49*	
05 05 23 00-1255	LF	5/16" Diameter, 316 Stainless Steel Threaded Rod	9.94	0.65
		For Left Hand Threaded Rod, Add	*0.86*	
05 05 23 00-1256	LF	3/8" Diameter, 316 Stainless Steel Threaded Rod	13.25	0.76
		For Left Hand Threaded Rod, Add	*1.18*	
05 05 23 00-1257	LF	7/16" Diameter, 316 Stainless Steel Threaded Rod	20.85	0.78
		For Left Hand Threaded Rod, Add	*1.93*	
05 05 23 00-1258	LF	1/2" Diameter, 316 Stainless Steel Threaded Rod	22.13	0.81
		For Left Hand Threaded Rod, Add	*2.05*	
05 05 23 00-1259	LF	9/16" Diameter, 316 Stainless Steel Threaded Rod	29.14	0.82
		For Left Hand Threaded Rod, Add	*2.75*	
05 05 23 00-1260	LF	5/8" Diameter, 316 Stainless Steel Threaded Rod	31.38	0.83
		For Left Hand Threaded Rod, Add	*2.97*	
05 05 23 00-1261	LF	3/4" Diameter, 316 Stainless Steel Threaded Rod	45.91	0.85
		For Left Hand Threaded Rod, Add	*4.42*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-1262	LF	7/8" Diameter, 316 Stainless Steel Threaded Rod	62.99	0.88
		For Left Hand Threaded Rod, Add	*6.12*	
05 05 23 00-1263	LF	1" Diameter, 316 Stainless Steel Threaded Rod	79.76	1.00
		For Left Hand Threaded Rod, Add	*7.78*	
05 05 23 00-1264	LF	1-1/4" Diameter, 316 Stainless Steel Threaded Rod	168.78	1.20
		For Left Hand Threaded Rod, Add	*16.63*	
05 05 23 00-1265	LF	1-1/2" Diameter, 316 Stainless Steel Threaded Rod	221.35	1.36
		For Left Hand Threaded Rod, Add	*21.86*	
05 05 23 00-1266		Plain Finish Steel, B-7 Alloy Threaded Rod *(05 05 23 00-1190)*		
05 05 23 00-1267	LF	1/4" Diameter, Plain Finish Steel, B-7 Alloy Threaded Rod	3.56	0.59
		For Zinc Plating, Add	*1.18*	
05 05 23 00-1268	LF	5/16" Diameter, Plain Finish Steel, B-7 Alloy Threaded Rod	5.37	0.65
		For Zinc Plating, Add	*2.03*	
05 05 23 00-1269	LF	3/8" Diameter, Plain Finish Steel, B-7 Alloy Threaded Rod	5.64	0.76
		For Zinc Plating, Add	*2.07*	
05 05 23 00-1270	LF	7/16" Diameter, Plain Finish Steel, B-7 Alloy Threaded Rod	6.13	0.78
		For Zinc Plating, Add	*2.30*	
05 05 23 00-1271	LF	1/2" Diameter, Plain Finish Steel, B-7 Alloy Threaded Rod	6.73	0.81
		For Zinc Plating, Add	*2.57*	
05 05 23 00-1272	LF	9/16" Diameter, Plain Finish Steel, B-7 Alloy Threaded Rod	8.33	0.82
		For Zinc Plating, Add	*3.36*	
05 05 23 00-1273	LF	5/8" Diameter, Plain Finish Steel, B-7 Alloy Threaded Rod	8.59	0.83
		For Zinc Plating, Add	*3.47*	
05 05 23 00-1274	LF	3/4" Diameter, Plain Finish Steel, B-7 Alloy Threaded Rod	11.29	0.85
		For Zinc Plating, Add	*4.80*	
05 05 23 00-1275	LF	7/8" Diameter, Plain Finish Steel, B-7 Alloy Threaded Rod	13.47	0.88
		For Zinc Plating, Add	*5.86*	
05 05 23 00-1276	LF	1" Diameter, Plain Finish Steel, B-7 Alloy Threaded Rod	17.41	1.00
		For Zinc Plating, Add	*7.71*	
05 05 23 00-1277	LF	1-1/8" Diameter, Plain Finish Steel, B-7 Alloy Threaded Rod	22.57	1.11
		For Zinc Plating, Add	*10.18*	
05 05 23 00-1278	LF	1-1/4" Diameter, Plain Finish Steel, B-7 Alloy Threaded Rod	25.13	1.20
		For Zinc Plating, Add	*11.32*	
05 05 23 00-1279	LF	1-3/8" Diameter, Plain Finish Steel, B-7 Alloy Threaded Rod	28.94	1.30
		For Zinc Plating, Add	*13.17*	
05 05 23 00-1280	LF	1-1/2" Diameter, Plain Finish Steel, B-7 Alloy Threaded Rod	35.09	1.36
		For Zinc Plating, Add	*16.19*	
05 05 23 00-1281	LF	1-3/4" Diameter, Plain Finish Steel, B-7 Alloy Threaded Rod	36.28	1.43
		For Zinc Plating, Add	*16.72*	
05 05 23 00-1282	LF	2" Diameter, Plain Finish Steel, B-7 Alloy Threaded Rod	48.51	1.50
		For Zinc Plating, Add	*22.76*	
05 05 23 00-1283		Nuts And Washers *(05 05 23)*		
05 05 23 00-1284		Hex Nuts *(05 05 23 00-1283)*		
05 05 23 00-1285		Zinc Plated Steel, Low Carbon/Grade 2 Hex Nuts *(05 05 23 00-1284)*		
05 05 23 00-1286	EA	1/4" Diameter, Zinc Plated Steel, Low Carbon/Grade 2 Hex Nut	0.79	0.36
05 05 23 00-1287	EA	5/16" Diameter, Zinc Plated Steel, Low Carbon/Grade 2 Hex Nut	0.88	0.36
05 05 23 00-1288	EA	3/8" Diameter, Zinc Plated Steel, Low Carbon/Grade 2 Hex Nut	0.95	0.36
05 05 23 00-1289	EA	7/16" Diameter, Zinc Plated Steel, Low Carbon/Grade 2 Hex Nut	1.10	0.36
05 05 23 00-1290	EA	1/2" Diameter, Zinc Plated Steel, Low Carbon/Grade 2 Hex Nut	1.19	0.36
05 05 23 00-1291	EA	9/16" Diameter, Zinc Plated Steel, Low Carbon/Grade 2 Hex Nut	1.56	0.36
05 05 23 00-1292	EA	5/8" Diameter, Zinc Plated Steel, Low Carbon/Grade 2 Hex Nut	1.61	0.36
05 05 23 00-1293	EA	3/4" Diameter, Zinc Plated Steel, Low Carbon/Grade 2 Hex Nut	1.91	0.71
05 05 23 00-1294	EA	7/8" Diameter, Zinc Plated Steel, Low Carbon/Grade 2 Hex Nut	2.78	0.71
05 05 23 00-1295	EA	1" Diameter, Zinc Plated Steel, Low Carbon/Grade 2 Hex Nut	3.53	0.71
05 05 23 00-1296	EA	1-1/8" Diameter, Zinc Plated Steel, Low Carbon/Grade 2 Hex Nut	5.76	0.71
05 05 23 00-1297	EA	1-1/4" Diameter, Zinc Plated Steel, Low Carbon/Grade 2 Hex Nut	7.04	0.71
05 05 23 00-1298	EA	1-3/8" Diameter, Zinc Plated Steel, Low Carbon/Grade 2 Hex Nut	10.33	0.71
05 05 23 00-1299	EA	1-1/2" Diameter, Zinc Plated Steel, Low Carbon/Grade 2 Hex Nut	11.96	1.08
05 05 23 00-1300	EA	1-3/4" Diameter, Zinc Plated Steel, Low Carbon/Grade 2 Hex Nut	17.54	1.08
05 05 23 00-1301	EA	2" Diameter, Zinc Plated Steel, Low Carbon/Grade 2 Hex Nut	25.33	1.08
05 05 23 00-1302		Zinc Plated Steel, Grade 5 Hex Nuts *(05 05 23 00-1284)*		
05 05 23 00-1303	EA	1/4" Diameter, Zinc Plated Steel, Grade 5 Hex Nut	0.82	0.36
05 05 23 00-1304	EA	5/16" Diameter, Zinc Plated Steel, Grade 5 Hex Nut	0.89	0.36
05 05 23 00-1305	EA	3/8" Diameter, Zinc Plated Steel, Grade 5 Hex Nut	0.98	0.36
05 05 23 00-1306	EA	7/16" Diameter, Zinc Plated Steel, Grade 5 Hex Nut	1.14	0.36
05 05 23 00-1307	EA	1/2" Diameter, Zinc Plated Steel, Grade 5 Hex Nut	1.33	0.36
05 05 23 00-1308	EA	9/16" Diameter, Zinc Plated Steel, Grade 5 Hex Nut	1.60	0.36
05 05 23 00-1309	EA	5/8" Diameter, Zinc Plated Steel, Grade 5 Hex Nut	1.64	0.36
05 05 23 00-1310	EA	3/4" Diameter, Zinc Plated Steel, Grade 5 Hex Nut	2.16	0.71
05 05 23 00-1311	EA	7/8" Diameter, Zinc Plated Steel, Grade 5 Hex Nut	3.03	0.71
05 05 23 00-1312	EA	1" Diameter, Zinc Plated Steel, Grade 5 Hex Nut	4.27	0.71
05 05 23 00-1313	EA	1-1/8" Diameter, Zinc Plated Steel, Grade 5 Hex Nut	6.50	0.71
05 05 23 00-1314	EA	1-1/4" Diameter, Zinc Plated Steel, Grade 5 Hex Nut	9.17	0.71
05 05 23 00-1315	EA	1-3/8" Diameter, Zinc Plated Steel, Grade 5 Hex Nut	13.45	0.71
05 05 23 00-1316	EA	1-1/2" Diameter, Zinc Plated Steel, Grade 5 Hex Nut	14.85	1.08

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-1317	EA	1-3/4" Diameter, Zinc Plated Steel, Grade 5 Hex Nut	26.76	1.08
05 05 23 00-1318	EA	2" Diameter, Zinc Plated Steel, Grade 5 Hex Nut	38.36	1.08
05 05 23 00-1319		**Zinc Plated Steel, Grade 8 Hex Nuts** *(05 05 23 00-1284)*		
05 05 23 00-1320	EA	1/4" Diameter, Zinc Plated Steel, Grade 8 Hex Nut	0.83	0.36
05 05 23 00-1321	EA	5/16" Diameter, Zinc Plated Steel, Grade 8 Hex Nut	0.96	0.36
05 05 23 00-1322	EA	3/8" Diameter, Zinc Plated Steel, Grade 8 Hex Nut	1.04	0.36
05 05 23 00-1323	EA	7/16" Diameter, Zinc Plated Steel, Grade 8 Hex Nut	1.30	0.36
05 05 23 00-1324	EA	1/2" Diameter, Zinc Plated Steel, Grade 8 Hex Nut	1.55	0.36
05 05 23 00-1325	EA	9/16" Diameter, Zinc Plated Steel, Grade 8 Hex Nut	1.85	0.36
05 05 23 00-1326	EA	5/8" Diameter, Zinc Plated Steel, Grade 8 Hex Nut	2.10	0.36
05 05 23 00-1327	EA	3/4" Diameter, Zinc Plated Steel, Grade 8 Hex Nut	2.61	0.71
05 05 23 00-1328	EA	7/8" Diameter, Zinc Plated Steel, Grade 8 Hex Nut	3.89	0.71
05 05 23 00-1329	EA	1" Diameter, Zinc Plated Steel, Grade 8 Hex Nut	5.18	0.71
05 05 23 00-1330	EA	1-1/8" Diameter, Zinc Plated Steel, Grade 8 Hex Nut	8.10	0.71
05 05 23 00-1331	EA	1-1/4" Diameter, Zinc Plated Steel, Grade 8 Hex Nut	10.10	0.71
05 05 23 00-1332	EA	1-3/8" Diameter, Zinc Plated Steel, Grade 8 Hex Nut	16.60	0.71
05 05 23 00-1333	EA	1-1/2" Diameter, Zinc Plated Steel, Grade 8 Hex Nut	17.62	1.08
05 05 23 00-1334	EA	1-3/4" Diameter, Zinc Plated Steel, Grade 8 Hex Nut	26.84	1.08
05 05 23 00-1335	EA	2" Diameter, Zinc Plated Steel, Grade 8 Hex Nut	37.93	1.08
05 05 23 00-1336		**Hot Dipped Galvanized Steel, Low Carbon/Grade 2 Hex Nuts** *(05 05 23 00-1284)*		
05 05 23 00-1337	EA	1/4" Diameter, Hot Dipped Galvanized Steel, Low Carbon/Grade 2 Hex Nut	0.83	0.36
05 05 23 00-1338	EA	5/16" Diameter, Hot Dipped Galvanized Steel, Low Carbon/Grade 2 Hex Nut	0.93	0.36
05 05 23 00-1339	EA	3/8" Diameter, Hot Dipped Galvanized Steel, Low Carbon/Grade 2 Hex Nut	1.01	0.36
05 05 23 00-1340	EA	7/16" Diameter, Hot Dipped Galvanized Steel, Low Carbon/Grade 2 Hex Nut	1.27	0.36
05 05 23 00-1341	EA	1/2" Diameter, Hot Dipped Galvanized Steel, Low Carbon/Grade 2 Hex Nut	1.46	0.36
05 05 23 00-1342	EA	9/16" Diameter, Hot Dipped Galvanized Steel, Low Carbon/Grade 2 Hex Nut	1.62	0.36
05 05 23 00-1343	EA	5/8" Diameter, Hot Dipped Galvanized Steel, Low Carbon/Grade 2 Hex Nut	1.78	0.36
05 05 23 00-1344	EA	3/4" Diameter, Hot Dipped Galvanized Steel, Low Carbon/Grade 2 Hex Nut	2.38	0.71
05 05 23 00-1345	EA	7/8" Diameter, Hot Dipped Galvanized Steel, Low Carbon/Grade 2 Hex Nut	3.44	0.71
05 05 23 00-1346	EA	1" Diameter, Hot Dipped Galvanized Steel, Low Carbon/Grade 2 Hex Nut	4.74	0.71
05 05 23 00-1347	EA	1-1/8" Diameter, Hot Dipped Galvanized Steel, Low Carbon/Grade 2 Hex Nut	7.84	0.71
05 05 23 00-1348	EA	1-1/4" Diameter, Hot Dipped Galvanized Steel, Low Carbon/Grade 2 Hex Nut	10.04	0.71
05 05 23 00-1349	EA	1-3/8" Diameter, Hot Dipped Galvanized Steel, Low Carbon/Grade 2 Hex Nut	14.88	0.71
05 05 23 00-1350	EA	1-1/2" Diameter, Hot Dipped Galvanized Steel, Low Carbon/Grade 2 Hex Nut	17.35	1.08
05 05 23 00-1351	EA	1-3/4" Diameter, Hot Dipped Galvanized Steel, Low Carbon/Grade 2 Hex Nut	30.22	1.08
05 05 23 00-1352	EA	2" Diameter, Hot Dipped Galvanized Steel, Low Carbon/Grade 2 Hex Nut	52.25	1.08
05 05 23 00-1353		**304 Stainless Steel Hex Nuts** *(05 05 23 00-1284)*		
05 05 23 00-1354	EA	1/4" Diameter, 304 Stainless Steel Hex Nut	0.95	0.36
05 05 23 00-1355	EA	5/16" Diameter, 304 Stainless Steel Hex Nut	1.12	0.36
05 05 23 00-1356	EA	3/8" Diameter, 304 Stainless Steel Hex Nut	1.27	0.36
05 05 23 00-1357	EA	7/16" Diameter, 304 Stainless Steel Hex Nut	1.91	0.36
05 05 23 00-1358	EA	1/2" Diameter, 304 Stainless Steel Hex Nut	2.07	0.36
05 05 23 00-1359	EA	9/16" Diameter, 304 Stainless Steel Hex Nut	3.17	0.36
05 05 23 00-1360	EA	5/8" Diameter, 304 Stainless Steel Hex Nut	3.54	0.36
05 05 23 00-1361	EA	3/4" Diameter, 304 Stainless Steel Hex Nut	4.08	0.71
05 05 23 00-1362	EA	7/8" Diameter, 304 Stainless Steel Hex Nut	6.73	0.71
05 05 23 00-1363	EA	1" Diameter, 304 Stainless Steel Hex Nut	10.32	0.71
05 05 23 00-1364	EA	1-1/4" Diameter, 304 Stainless Steel Hex Nut	24.89	0.71
05 05 23 00-1365	EA	1-1/2" Diameter, 304 Stainless Steel Hex Nut	47.91	1.08
05 05 23 00-1366	EA	1-3/4" Diameter, 304 Stainless Steel Hex Nut	84.33	1.08
05 05 23 00-1367	EA	2" Diameter, 304 Stainless Steel Hex Nut	120.24	1.08
05 05 23 00-1368		**316 Stainless Steel Hex Nuts** *(05 05 23 00-1284)*		
05 05 23 00-1369	EA	1/4" Diameter, 316 Stainless Steel Hex Nut	1.11	0.36
05 05 23 00-1370	EA	5/16" Diameter, 316 Stainless Steel Hex Nut	1.27	0.36
05 05 23 00-1371	EA	3/8" Diameter, 316 Stainless Steel Hex Nut	1.52	0.36
05 05 23 00-1372	EA	7/16" Diameter, 316 Stainless Steel Hex Nut	2.53	0.36
05 05 23 00-1373	EA	1/2" Diameter, 316 Stainless Steel Hex Nut	2.71	0.36
05 05 23 00-1374	EA	9/16" Diameter, 316 Stainless Steel Hex Nut	3.71	0.36
05 05 23 00-1375	EA	5/8" Diameter, 316 Stainless Steel Hex Nut	4.19	0.36
05 05 23 00-1376	EA	3/4" Diameter, 316 Stainless Steel Hex Nut	5.88	0.71
05 05 23 00-1377	EA	7/8" Diameter, 316 Stainless Steel Hex Nut	8.19	0.71
05 05 23 00-1378	EA	1" Diameter, 316 Stainless Steel Hex Nut	12.66	0.71
05 05 23 00-1379	EA	1-1/4" Diameter, 316 Stainless Steel Hex Nut	38.66	0.71
05 05 23 00-1380	EA	1-1/2" Diameter, 316 Stainless Steel Hex Nut	62.58	1.08
05 05 23 00-1381	EA	1-3/4" Diameter, 316 Stainless Steel Hex Nut	105.71	1.08
05 05 23 00-1382	EA	2" Diameter, 316 Stainless Steel Hex Nut	196.62	1.08
05 05 23 00-1383		**Flat Washers** *(05 05 23 00-1283)*		
05 05 23 00-1384		**Zinc Plated Steel, Low Carbon Flat Washers** *(05 05 23 00-1383)*		
05 05 23 00-1385	EA	1/4" Inside Diameter, Zinc Plated Steel, Low Carbon Flat Washer	0.06	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-1386	EA	5/16" Inside Diameter, Zinc Plated Steel, Low Carbon Flat Washer	0.09	
05 05 23 00-1387	EA	3/8" Inside Diameter, Zinc Plated Steel, Low Carbon Flat Washer	0.16	
05 05 23 00-1388	EA	7/16" Inside Diameter, Zinc Plated Steel, Low Carbon Flat Washer	0.25	
05 05 23 00-1389	EA	1/2" Inside Diameter, Zinc Plated Steel, Low Carbon Flat Washer	0.35	
05 05 23 00-1390	EA	9/16" Inside Diameter, Zinc Plated Steel, Low Carbon Flat Washer	0.40	
05 05 23 00-1391	EA	5/8" Inside Diameter, Zinc Plated Steel, Low Carbon Flat Washer	0.68	
05 05 23 00-1392	EA	3/4" Inside Diameter, Zinc Plated Steel, Low Carbon Flat Washer	0.98	
05 05 23 00-1393	EA	7/8" Inside Diameter, Zinc Plated Steel, Low Carbon Flat Washer	1.17	
05 05 23 00-1394	EA	1" Inside Diameter, Zinc Plated Steel, Low Carbon Flat Washer	1.43	
05 05 23 00-1395	EA	1-1/8" Inside Diameter, Zinc Plated Steel, Low Carbon Flat Washer	1.62	
05 05 23 00-1396	EA	1-1/4" Inside Diameter, Zinc Plated Steel, Low Carbon Flat Washer	1.93	
05 05 23 00-1397	EA	1-3/8" Inside Diameter, Zinc Plated Steel, Low Carbon Flat Washer	3.03	
05 05 23 00-1398	EA	1-1/2" Inside Diameter, Zinc Plated Steel, Low Carbon Flat Washer	3.11	
05 05 23 00-1399	EA	1-3/4" Inside Diameter, Zinc Plated Steel, Low Carbon Flat Washer	4.60	
05 05 23 00-1400	EA	2" Inside Diameter, Zinc Plated Steel, Low Carbon Flat Washer	5.72	
05 05 23 00-1401		Zinc Plated Steel, Hardened Flat Washers *(05 05 23 00-1383)*		
05 05 23 00-1402	EA	1/4" Inside Diameter, Zinc Plated Steel, Hardened Flat Washer	0.21	
05 05 23 00-1403	EA	5/16" Inside Diameter, Zinc Plated Steel, Hardened Flat Washer	0.29	
05 05 23 00-1404	EA	3/8" Inside Diameter, Zinc Plated Steel, Hardened Flat Washer	0.33	
05 05 23 00-1405	EA	7/16" Inside Diameter, Zinc Plated Steel, Hardened Flat Washer	0.45	
05 05 23 00-1406	EA	1/2" Inside Diameter, Zinc Plated Steel, Hardened Flat Washer	0.61	
05 05 23 00-1407	EA	9/16" Inside Diameter, Zinc Plated Steel, Hardened Flat Washer	0.98	
05 05 23 00-1408	EA	5/8" Inside Diameter, Zinc Plated Steel, Hardened Flat Washer	1.40	
05 05 23 00-1409	EA	3/4" Inside Diameter, Zinc Plated Steel, Hardened Flat Washer	1.98	
05 05 23 00-1410	EA	7/8" Inside Diameter, Zinc Plated Steel, Hardened Flat Washer	3.30	
05 05 23 00-1411	EA	1" Inside Diameter, Zinc Plated Steel, Hardened Flat Washer	3.66	
05 05 23 00-1412	EA	1-1/8" Inside Diameter, Zinc Plated Steel, Hardened Flat Washer	5.33	
05 05 23 00-1413	EA	1-1/4" Inside Diameter, Zinc Plated Steel, Hardened Flat Washer	5.81	
05 05 23 00-1414	EA	1-3/8" Inside Diameter, Zinc Plated Steel, Hardened Flat Washer	7.67	
05 05 23 00-1415	EA	1-1/2" Inside Diameter, Zinc Plated Steel, Hardened Flat Washer	8.77	
05 05 23 00-1416	EA	1-3/4" Inside Diameter, Zinc Plated Steel, Hardened Flat Washer	11.79	
05 05 23 00-1417	EA	2" Inside Diameter, Zinc Plated Steel, Hardened Flat Washer	14.14	
05 05 23 00-1418		Hot Dipped Galvanized Steel Flat Washers *(05 05 23 00-1383)*		
05 05 23 00-1419	EA	1/4" Inside Diameter, Hot Dipped Galvanized Steel Flat Washer	0.14	
05 05 23 00-1420	EA	5/16" Inside Diameter, Hot Dipped Galvanized Steel Flat Washer	0.20	
05 05 23 00-1421	EA	3/8" Inside Diameter, Hot Dipped Galvanized Steel Flat Washer	0.22	
05 05 23 00-1422	EA	7/16" Inside Diameter, Hot Dipped Galvanized Steel Flat Washer	0.41	
05 05 23 00-1423	EA	1/2" Inside Diameter, Hot Dipped Galvanized Steel Flat Washer	0.53	
05 05 23 00-1424	EA	9/16" Inside Diameter, Hot Dipped Galvanized Steel Flat Washer	0.86	
05 05 23 00-1425	EA	5/8" Inside Diameter, Hot Dipped Galvanized Steel Flat Washer	0.96	
05 05 23 00-1426	EA	3/4" Inside Diameter, Hot Dipped Galvanized Steel Flat Washer	1.46	
05 05 23 00-1427	EA	7/8" Inside Diameter, Hot Dipped Galvanized Steel Flat Washer	2.06	
05 05 23 00-1428	EA	1" Inside Diameter, Hot Dipped Galvanized Steel Flat Washer	2.26	
05 05 23 00-1429	EA	1-1/8" Inside Diameter, Hot Dipped Galvanized Steel Flat Washer	3.46	
05 05 23 00-1430	EA	1-1/4" Inside Diameter, Hot Dipped Galvanized Steel Flat Washer	3.85	
05 05 23 00-1431	EA	1-3/8" Inside Diameter, Hot Dipped Galvanized Steel Flat Washer	5.50	
05 05 23 00-1432	EA	1-1/2" Inside Diameter, Hot Dipped Galvanized Steel Flat Washer	5.96	
05 05 23 00-1433	EA	1-3/4" Inside Diameter, Hot Dipped Galvanized Steel Flat Washer	8.64	
05 05 23 00-1434		304/18-8 Stainless Steel Flat Washers *(05 05 23 00-1383)*		
05 05 23 00-1435	EA	1/4" Inside Diameter, 304/18-8 Stainless Steel Flat Washer	0.18	
05 05 23 00-1436	EA	5/16" Inside Diameter, 304/18-8 Stainless Steel Flat Washer	0.24	
05 05 23 00-1437	EA	3/8" Inside Diameter, 304/18-8 Stainless Steel Flat Washer	0.34	
05 05 23 00-1438	EA	7/16" Inside Diameter, 304/18-8 Stainless Steel Flat Washer	0.64	
05 05 23 00-1439	EA	1/2" Inside Diameter, 304/18-8 Stainless Steel Flat Washer	1.16	
05 05 23 00-1440	EA	9/16" Inside Diameter, 304/18-8 Stainless Steel Flat Washer	1.45	
05 05 23 00-1441	EA	5/8" Inside Diameter, 304/18-8 Stainless Steel Flat Washer	2.12	
05 05 23 00-1442	EA	3/4" Inside Diameter, 304/18-8 Stainless Steel Flat Washer	2.16	
05 05 23 00-1443	EA	7/8" Inside Diameter, 304/18-8 Stainless Steel Flat Washer	4.56	
05 05 23 00-1444	EA	1" Inside Diameter, 304/18-8 Stainless Steel Flat Washer	5.77	
05 05 23 00-1445	EA	1-1/8" Inside Diameter, 304/18-8 Stainless Steel Flat Washer	6.72	
05 05 23 00-1446	EA	1-1/4" Inside Diameter, 304/18-8 Stainless Steel Flat Washer	7.24	
05 05 23 00-1447	EA	1-3/8" Inside Diameter, 304/18-8 Stainless Steel Flat Washer	7.65	
05 05 23 00-1448	EA	1-1/2" Inside Diameter, 304/18-8 Stainless Steel Flat Washer	9.33	
05 05 23 00-1449	EA	1-3/4" Inside Diameter, 304/18-8 Stainless Steel Flat Washer	11.59	
05 05 23 00-1450	EA	2" Inside Diameter, 304/18-8 Stainless Steel Flat Washer	22.77	
05 05 23 00-1451		316 Stainless Steel Flat Washers *(05 05 23 00-1383)*		
05 05 23 00-1452	EA	1/4" Inside Diameter, 316 Stainless Steel Flat Washer	0.35	
05 05 23 00-1453	EA	5/16" Inside Diameter, 316 Stainless Steel Flat Washer	0.39	
05 05 23 00-1454	EA	3/8" Inside Diameter, 316 Stainless Steel Flat Washer	0.69	
05 05 23 00-1455	EA	7/16" Inside Diameter, 316 Stainless Steel Flat Washer	0.81	
05 05 23 00-1456	EA	1/2" Inside Diameter, 316 Stainless Steel Flat Washer	1.50	
05 05 23 00-1457	EA	9/16" Inside Diameter, 316 Stainless Steel Flat Washer	2.70	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-1458	EA	5/8" Inside Diameter, 316 Stainless Steel Flat Washer	3.19	
05 05 23 00-1459	EA	3/4" Inside Diameter, 316 Stainless Steel Flat Washer	4.02	
05 05 23 00-1460	EA	7/8" Inside Diameter, 316 Stainless Steel Flat Washer	6.22	
05 05 23 00-1461	EA	1" Inside Diameter, 316 Stainless Steel Flat Washer	6.95	
05 05 23 00-1462	EA	1-1/8" Inside Diameter, 316 Stainless Steel Flat Washer	7.92	
05 05 23 00-1463	EA	1-1/4" Inside Diameter, 316 Stainless Steel Flat Washer	9.75	
05 05 23 00-1464	EA	1-3/8" Inside Diameter, 316 Stainless Steel Flat Washer	10.31	
05 05 23 00-1465	EA	1-1/2" Inside Diameter, 316 Stainless Steel Flat Washer	10.54	
05 05 23 00-1466	EA	1-3/4" Inside Diameter, 316 Stainless Steel Flat Washer	15.45	
05 05 23 00-1467		Lock Washers *(05 05 23 00-1283)*		
05 05 23 00-1468		Zinc Plated Steel, Low Carbon Lock Washers *(05 05 23 00-1467)*		
05 05 23 00-1469	EA	1/4" Inside Diameter, Zinc Plated Steel, Low Carbon Lock Washer	0.02	
05 05 23 00-1470	EA	5/16" Inside Diameter, Zinc Plated Steel, Low Carbon Lock Washer	0.04	
05 05 23 00-1471	EA	3/8" Inside Diameter, Zinc Plated Steel, Low Carbon Lock Washer	0.06	
05 05 23 00-1472	EA	7/16" Inside Diameter, Zinc Plated Steel, Low Carbon Lock Washer	0.10	
05 05 23 00-1473	EA	1/2" Inside Diameter, Zinc Plated Steel, Low Carbon Lock Washer	0.14	
05 05 23 00-1474	EA	9/16" Inside Diameter, Zinc Plated Steel, Low Carbon Lock Washer	0.23	
05 05 23 00-1475	EA	5/8" Inside Diameter, Zinc Plated Steel, Low Carbon Lock Washer	0.25	
05 05 23 00-1476	EA	3/4" Inside Diameter, Zinc Plated Steel, Low Carbon Lock Washer	0.39	
05 05 23 00-1477	EA	7/8" Inside Diameter, Zinc Plated Steel, Low Carbon Lock Washer	0.65	
05 05 23 00-1478	EA	1" Inside Diameter, Zinc Plated Steel, Low Carbon Lock Washer	1.17	
05 05 23 00-1479	EA	1-1/8" Inside Diameter, Zinc Plated Steel, Low Carbon Lock Washer	1.71	
05 05 23 00-1480	EA	1-1/4" Inside Diameter, Zinc Plated Steel, Low Carbon Lock Washer	2.62	
05 05 23 00-1481	EA	1-3/8" Inside Diameter, Zinc Plated Steel, Low Carbon Lock Washer	4.15	
05 05 23 00-1482	EA	1-1/2" Inside Diameter, Zinc Plated Steel, Low Carbon Lock Washer	4.89	
05 05 23 00-1483	EA	1-3/4" Inside Diameter, Zinc Plated Steel, Low Carbon Lock Washer	8.72	
05 05 23 00-1484	EA	2" Inside Diameter, Zinc Plated Steel, Low Carbon Lock Washer	9.82	
05 05 23 00-1485		Hot Dipped Galvanized Steel Lock Washers *(05 05 23 00-1467)*		
05 05 23 00-1486	EA	1/4" Inside Diameter, Hot Dipped Galvanized Steel Lock Washer	0.11	
05 05 23 00-1487	EA	5/16" Inside Diameter, Hot Dipped Galvanized Steel Lock Washer	0.13	
05 05 23 00-1488	EA	3/8" Inside Diameter, Hot Dipped Galvanized Steel Lock Washer	0.17	
05 05 23 00-1489	EA	7/16" Inside Diameter, Hot Dipped Galvanized Steel Lock Washer	0.18	
05 05 23 00-1490	EA	1/2" Inside Diameter, Hot Dipped Galvanized Steel Lock Washer	0.29	
05 05 23 00-1491	EA	9/16" Inside Diameter, Hot Dipped Galvanized Steel Lock Washer	0.38	
05 05 23 00-1492	EA	5/8" Inside Diameter, Hot Dipped Galvanized Steel Lock Washer	0.45	
05 05 23 00-1493	EA	3/4" Inside Diameter, Hot Dipped Galvanized Steel Lock Washer	0.75	
05 05 23 00-1494	EA	7/8" Inside Diameter, Hot Dipped Galvanized Steel Lock Washer	1.08	
05 05 23 00-1495	EA	1" Inside Diameter, Hot Dipped Galvanized Steel Lock Washer	1.71	
05 05 23 00-1496	EA	1-1/8" Inside Diameter, Hot Dipped Galvanized Steel Lock Washer	3.10	
05 05 23 00-1497	EA	1-1/4" Inside Diameter, Hot Dipped Galvanized Steel Lock Washer	3.69	
05 05 23 00-1498	EA	1-3/8" Inside Diameter, Hot Dipped Galvanized Steel Lock Washer	5.33	
05 05 23 00-1499	EA	1-1/2" Inside Diameter, Hot Dipped Galvanized Steel Lock Washer	6.10	
05 05 23 00-1500	EA	1-3/4" Inside Diameter, Hot Dipped Galvanized Steel Lock Washer	8.25	
05 05 23 00-1501	EA	2" Inside Diameter, Hot Dipped Galvanized Steel Lock Washer	11.24	
05 05 23 00-1502		304/18-8 Stainless Steel Lock Washers *(05 05 23 00-1467)*		
05 05 23 00-1503	EA	1/4" Inside Diameter, 304/18-8 Stainless Steel Lock Washer	0.15	
05 05 23 00-1504	EA	5/16" Inside Diameter, 304/18-8 Stainless Steel Lock Washer	0.21	
05 05 23 00-1505	EA	3/8" Inside Diameter, 304/18-8 Stainless Steel Lock Washer	0.30	
05 05 23 00-1506	EA	7/16" Inside Diameter, 304/18-8 Stainless Steel Lock Washer	0.56	
05 05 23 00-1507	EA	1/2" Inside Diameter, 304/18-8 Stainless Steel Lock Washer	0.61	
05 05 23 00-1508	EA	9/16" Inside Diameter, 304/18-8 Stainless Steel Lock Washer	1.49	
05 05 23 00-1509	EA	5/8" Inside Diameter, 304/18-8 Stainless Steel Lock Washer	1.76	
05 05 23 00-1510	EA	3/4" Inside Diameter, 304/18-8 Stainless Steel Lock Washer	2.05	
05 05 23 00-1511	EA	7/8" Inside Diameter, 304/18-8 Stainless Steel Lock Washer	3.71	
05 05 23 00-1512	EA	1" Inside Diameter, 304/18-8 Stainless Steel Lock Washer	5.23	
05 05 23 00-1513	EA	1-1/8" Inside Diameter, 304/18-8 Stainless Steel Lock Washer	9.13	
05 05 23 00-1514	EA	1-1/4" Inside Diameter, 304/18-8 Stainless Steel Lock Washer	12.15	
05 05 23 00-1515	EA	1-3/8" Inside Diameter, 304/18-8 Stainless Steel Lock Washer	15.45	
05 05 23 00-1516	EA	1-1/2" Inside Diameter, 304/18-8 Stainless Steel Lock Washer	18.54	
05 05 23 00-1517		316 Stainless Steel Lock Washers *(05 05 23 00-1467)*		
05 05 23 00-1518	EA	1/4" Inside Diameter, 316 Stainless Steel Lock Washer	0.18	
05 05 23 00-1519	EA	5/16" Inside Diameter, 316 Stainless Steel Lock Washer	0.40	
05 05 23 00-1520	EA	3/8" Inside Diameter, 316 Stainless Steel Lock Washer	0.47	
05 05 23 00-1521	EA	7/16" Inside Diameter, 316 Stainless Steel Lock Washer	0.80	
05 05 23 00-1522	EA	1/2" Inside Diameter, 316 Stainless Steel Lock Washer	0.89	
05 05 23 00-1523	EA	9/16" Inside Diameter, 316 Stainless Steel Lock Washer	1.59	
05 05 23 00-1524	EA	5/8" Inside Diameter, 316 Stainless Steel Lock Washer	1.74	
05 05 23 00-1525	EA	3/4" Inside Diameter, 316 Stainless Steel Lock Washer	3.01	
05 05 23 00-1526	EA	7/8" Inside Diameter, 316 Stainless Steel Lock Washer	4.98	
05 05 23 00-1527	EA	1" Inside Diameter, 316 Stainless Steel Lock Washer	6.78	
05 05 23 00-1528	EA	1-1/8" Inside Diameter, 316 Stainless Steel Lock Washer	9.46	
05 05 23 00-1529	EA	1-1/4" Inside Diameter, 316 Stainless Steel Lock Washer	14.56	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-1530	EA	1-3/8" Inside Diameter, 316 Stainless Steel Lock Washer	26.07	
05 05 23 00-1531	EA	1-1/2" Inside Diameter, 316 Stainless Steel Lock Washer	28.95	
05 05 23 00-1532		Load Indicating Washers *(05 05 23 00-1283)*		
05 05 23 00-1533		A325, Direct Tension Indicator, Load Indicating Washers (ASTM F959) *(05 05 23 00-1532)*		
05 05 23 00-1534		Plain Finish, A325, Direct Tension Indicator, Load Indicating Washers (ASTM F959) *(05 05 23 00-1533)*		
05 05 23 00-1535	EA	1/2", Plain Finish, (ASTM F959) A325, Direct Tension Indicator, Load Indicating Washer	2.84	
05 05 23 00-1536	EA	5/8", Plain Finish, (ASTM F959) A325, Direct Tension Indicator, Load Indicating Washer	3.22	
05 05 23 00-1537	EA	3/4", Plain Finish, (ASTM F959) A325, Direct Tension Indicator, Load Indicating Washer	3.47	
05 05 23 00-1538	EA	7/8", Plain Finish, (ASTM F959) A325, Direct Tension Indicator, Load Indicating Washer	3.94	
05 05 23 00-1539	EA	1", Plain Finish, (ASTM F959) A325, Direct Tension Indicator, Load Indicating Washer	4.76	
05 05 23 00-1540	EA	1-1/8", Plain Finish, (ASTM F959) A325, Direct Tension Indicator, Load Indicating Washer	7.92	
05 05 23 00-1541	EA	1-1/4", Plain Finish, (ASTM F959) A325, Direct Tension Indicator, Load Indicating Washer	10.23	
05 05 23 00-1542	EA	1-3/8", Plain Finish, (ASTM F959) A325, Direct Tension Indicator, Load Indicating Washer	13.06	
05 05 23 00-1543	EA	1-1/2", Plain Finish, (ASTM F959) A325, Direct Tension Indicator, Load Indicating Washer	14.36	
05 05 23 00-1544		Galvanized, A325, Direct Tension Indicator, Load Indicating Washers (ASTM F959) *(05 05 23 00-1533)*		
05 05 23 00-1545	EA	1/2", Galvanized, (ASTM F959) A325, Direct Tension Indicator, Load Indicating Washer	3.60	
05 05 23 00-1546	EA	5/8", Galvanized, (ASTM F959) A325, Direct Tension Indicator, Load Indicating Washer	4.01	
05 05 23 00-1547	EA	3/4", Galvanized, (ASTM F959) A325, Direct Tension Indicator, Load Indicating Washer	3.90	
05 05 23 00-1548	EA	7/8", Galvanized, (ASTM F959) A325, Direct Tension Indicator, Load Indicating Washer	4.76	
05 05 23 00-1549	EA	1", Galvanized, (ASTM F959) A325, Direct Tension Indicator, Load Indicating Washer	5.64	
05 05 23 00-1550	EA	1-1/8", Galvanized, (ASTM F959) A325, Direct Tension Indicator, Load Indicating Washer	8.50	
05 05 23 00-1551	EA	1-1/4", Galvanized, (ASTM F959) A325, Direct Tension Indicator, Load Indicating Washer	10.70	
05 05 23 00-1552	EA	1-3/8", Galvanized, (ASTM F959) A325, Direct Tension Indicator, Load Indicating Washer	15.23	
05 05 23 00-1553	EA	1-1/2", Galvanized, (ASTM F959) A325, Direct Tension Indicator, Load Indicating Washer	16.75	
05 05 23 00-1554		Beveled Washers *(05 05 23 00-1283)*		
05 05 23 00-1555		Plain Finish, Square Beveled Structural Washers (ASTM F436) *(05 05 23 00-1554)*		
05 05 23 00-1556	EA	1/2", Plain Finish, (ASTM F436) Square Beveled Structural Washer	4.70	
05 05 23 00-1557	EA	5/8", Plain Finish, (ASTM F436) Square Beveled Structural Washer	4.79	
05 05 23 00-1558	EA	3/4", Plain Finish, (ASTM F436) Square Beveled Structural Washer	4.90	
05 05 23 00-1559	EA	7/8", Plain Finish, (ASTM F436) Square Beveled Structural Washer	5.96	
05 05 23 00-1560	EA	1", Plain Finish, (ASTM F436) Square Beveled Structural Washer	6.27	
05 05 23 00-1561		Galvanized, Square Beveled Structural Washers (ASTM F436) *(05 05 23 00-1554)*		
05 05 23 00-1562	EA	1/2", Galvanized, (ASTM F436) Square Beveled Structural Washer	6.76	
05 05 23 00-1563	EA	5/8", Galvanized, (ASTM F436) Square Beveled Structural Washer	7.06	
05 05 23 00-1564	EA	3/4", Galvanized, (ASTM F436) Square Beveled Structural Washer	7.06	
05 05 23 00-1565	EA	7/8", Galvanized, (ASTM F436) Square Beveled Structural Washer	7.46	
05 05 23 00-1566	EA	1", Galvanized, (ASTM F436) Square Beveled Structural Washer	7.94	
05 05 23 00-1567		Drilling In Existing Steel Plates *(05 05 23)*		
05 05 23 00-1568	EA	Up To 1/2" Diameter Drill Through Up To 1/4" Steel Plate	24.21	
		For Aluminum, Deduct	*-2.42*	
		For Stainless Steel, Add	*3.03*	
		For >5 To 10, Deduct	*-2.42*	
		For >10 To 25, Deduct	*-6.05*	
		For >25 To 50, Deduct	*-8.47*	
		For >50, Deduct	*-12.11*	
05 05 23 00-1569	EA	>1/2" To 7/8" Diameter Drill Through Up To 1/4" Steel Plate	28.47	
		For Aluminum, Deduct	*-2.85*	
		For Stainless Steel, Add	*3.56*	
		For >5 To 10, Deduct	*-2.85*	
		For >10 To 25, Deduct	*-7.12*	
		For >25 To 50, Deduct	*-9.96*	
		For >50, Deduct	*-14.24*	
05 05 23 00-1570	EA	>7/8" To 1-1/2" Diameter Drill Through Up To 1/4" Steel Plate	34.17	
		For Aluminum, Deduct	*-3.42*	
		For Stainless Steel, Add	*4.27*	
		For >5 To 10, Deduct	*-3.42*	
		For >10 To 25, Deduct	*-8.54*	
		For >25 To 50, Deduct	*-11.96*	
		For >50, Deduct	*-17.09*	
05 05 23 00-1571	EA	>1-1/2" To 4" Diameter Drill Through Up To 1/4" Steel Plate	39.86	
		For Aluminum, Deduct	*-3.99*	
		For Stainless Steel, Add	*4.98*	
		For >5 To 10, Deduct	*-3.99*	
		For >10 To 25, Deduct	*-9.97*	
		For >25 To 50, Deduct	*-13.95*	
		For >50, Deduct	*-19.93*	

copyright 2026 The Gordian Group, Inc.

	MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-1572		EA	>4" To 10" Diameter Drill Through Up To 1/4" Steel Plate	53.39	
			For Aluminum, Deduct	*-5.34*	
			For Stainless Steel, Add	*6.67*	
			For >5 To 10, Deduct	*-5.34*	
			For >10 To 25, Deduct	*-13.35*	
			For >25 To 50, Deduct	*-18.69*	
			For >50, Deduct	*-26.70*	
05 05 23 00-1573		EA	Up To 1/2" Diameter Drill Through >1/4" To 1/2" Steel Plate	28.47	
			For Aluminum, Deduct	*-2.85*	
			For Stainless Steel, Add	*3.56*	
			For >5 To 10, Deduct	*-2.85*	
			For >10 To 25, Deduct	*-7.12*	
			For >25 To 50, Deduct	*-9.96*	
			For >50, Deduct	*-14.24*	
05 05 23 00-1574		EA	>1/2" To 7/8" Diameter Drill Through >1/4" To 1/2" Steel Plate	35.59	
			For Aluminum, Deduct	*-3.56*	
			For Stainless Steel, Add	*4.45*	
			For >5 To 10, Deduct	*-3.56*	
			For >10 To 25, Deduct	*-8.90*	
			For >25 To 50, Deduct	*-12.46*	
			For >50, Deduct	*-17.80*	
05 05 23 00-1575		EA	>7/8" To 1-1/2" Diameter Drill Through >1/4" To 1/2" Steel Plate	42.71	
			For Aluminum, Deduct	*-4.27*	
			For Stainless Steel, Add	*5.34*	
			For >5 To 10, Deduct	*-4.27*	
			For >10 To 25, Deduct	*-10.68*	
			For >25 To 50, Deduct	*-14.95*	
			For >50, Deduct	*-21.36*	
05 05 23 00-1576		EA	>1-1/2" To 4" Diameter Drill Through >1/4" To 1/2" Steel Plate	53.39	
			For Aluminum, Deduct	*-5.34*	
			For Stainless Steel, Add	*6.67*	
			For >5 To 10, Deduct	*-5.34*	
			For >10 To 25, Deduct	*-13.35*	
			For >25 To 50, Deduct	*-18.69*	
			For >50, Deduct	*-26.70*	
05 05 23 00-1577		EA	Up To 1/2" Diameter Drill Through >1/2" To 1" Steel Plate	35.59	
			For Aluminum, Deduct	*-3.56*	
			For Stainless Steel, Add	*4.45*	
			For >5 To 10, Deduct	*-3.56*	
			For >10 To 25, Deduct	*-8.90*	
			For >25 To 50, Deduct	*-12.46*	
			For >50, Deduct	*-17.80*	
05 05 23 00-1578		EA	>1/2" To 7/8" Diameter Drill Through >1/2" To 1" Steel Plate	46.98	
			For Aluminum, Deduct	*-4.70*	
			For Stainless Steel, Add	*5.87*	
			For >5 To 10, Deduct	*-4.70*	
			For >10 To 25, Deduct	*-11.75*	
			For >25 To 50, Deduct	*-16.44*	
			For >50, Deduct	*-23.49*	
05 05 23 00-1579		EA	>7/8" To 1-1/2" Diameter Drill Through >1/2" To 1" Steel Plate	56.95	
			For Aluminum, Deduct	*-5.70*	
			For Stainless Steel, Add	*7.12*	
			For >5 To 10, Deduct	*-5.70*	
			For >10 To 25, Deduct	*-14.24*	
			For >25 To 50, Deduct	*-19.93*	
			For >50, Deduct	*-28.48*	

05 05 23 00-1580 Cutting Existing Steel With Torch *(05 05 23)*

05 05 23 00-1581		LF	Torch Cutting, Milled Steel Up To 1/4" Thick	7.50	

05 05 23 00-1582 Welded Stud Anchors *(05 05 23)*

05 05 23 00-1583		EA	1-1/8" Long x 1/4" Diameter, Welded Stud Concrete Anchors	4.68	
05 05 23 00-1584		EA	2-11/16" Long x 1/4" Diameter, Welded Stud Concrete Anchors	4.78	
05 05 23 00-1585		EA	3-1/8" Long x 1/4" Diameter, Welded Stud Concrete Anchors	4.82	
05 05 23 00-1586		EA	4-1/8" Long x 1/4" Diameter, Welded Stud Concrete Anchors	4.86	
05 05 23 00-1587		EA	1-3/8" Long x 3/8" Diameter, Welded Stud Concrete Anchors	4.61	
05 05 23 00-1588		EA	1-5/8" Long x 3/8" Diameter, Welded Stud Concrete Anchors	4.86	
05 05 23 00-1589		EA	2-1/8" Long x 3/8" Diameter, Welded Stud Concrete Anchors	5.10	
05 05 23 00-1590		EA	2-5/8" Long x 3/8" Diameter, Welded Stud Concrete Anchors	5.23	
05 05 23 00-1591		EA	3-1/8" Long x 3/8" Diameter, Welded Stud Concrete Anchors	5.36	
05 05 23 00-1592		EA	4-1/8" Long x 3/8" Diameter, Welded Stud Concrete Anchors	5.87	
05 05 23 00-1593		EA	5-1/8" Long x 3/8" Diameter, Welded Stud Concrete Anchors	6.29	
05 05 23 00-1594		EA	6-1/8" Long x 3/8" Diameter, Welded Stud Concrete Anchors	6.62	
05 05 23 00-1595		EA	1-1/2" Long x 1/2" Diameter, Welded Stud Concrete Anchors	5.65	
05 05 23 00-1596		EA	1-5/8" Long x 1/2" Diameter, Welded Stud Concrete Anchors	5.68	
05 05 23 00-1597		EA	2-1/8" Long x 1/2" Diameter, Welded Stud Concrete Anchors	6.07	
05 05 23 00-1598		EA	2-5/8" Long x 1/2" Diameter, Welded Stud Concrete Anchors	6.43	
05 05 23 00-1599		EA	3-1/8" Long x 1/2" Diameter, Welded Stud Concrete Anchors	6.87	
05 05 23 00-1600		EA	4-1/8" Long x 1/2" Diameter, Welded Stud Concrete Anchors	7.57	
05 05 23 00-1601		EA	5-5/16" Long x 1/2" Diameter, Welded Stud Concrete Anchors	8.01	
05 05 23 00-1602		EA	6-1/8" Long x 1/2" Diameter, Welded Stud Concrete Anchors	9.23	
05 05 23 00-1603		EA	8-1/8" Long x 1/2" Diameter, Welded Stud Concrete Anchors	11.54	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 05 23 00-1604	EA	2-11/16" Long x 5/8" Diameter, Welded Stud Concrete Anchors	8.04	
05 05 23 00-1605	EA	3-3/16" Long x 5/8" Diameter, Welded Stud Concrete Anchors	8.63	
05 05 23 00-1606	EA	3-11/16" Long x 5/8" Diameter, Welded Stud Concrete Anchors	9.10	
05 05 23 00-1607	EA	4-3/16" Long x 5/8" Diameter, Welded Stud Concrete Anchors	9.57	
05 05 23 00-1608	EA	4-11/16" Long x 5/8" Diameter, Welded Stud Concrete Anchors	9.96	
05 05 23 00-1609	EA	5-3/16" Long x 5/8" Diameter, Welded Stud Concrete Anchors	10.32	
05 05 23 00-1610	EA	6-3/16" Long x 5/8" Diameter, Welded Stud Concrete Anchors	10.79	
05 05 23 00-1611	EA	6-9/16" Long x 5/8" Diameter, Welded Stud Concrete Anchors	12.76	
05 05 23 00-1612	EA	8-3/16" Long x 5/8" Diameter, Welded Stud Concrete Anchors	15.48	

05 05 23 00-1613 Welded Shear Stud Connector *(05 05 23)*

05 05 23 00-1614 3/4" Diameter Welded Shear Stud Connector *(05 05 23 00-1613)*

05 05 23 00-1615	EA	3/4" Diameter x 3-3/16" Long, Welded Shear Stud Connector	10.30	
05 05 23 00-1616	EA	3/4" Diameter x 3-3/8" Long, Welded Shear Stud Connector	10.72	
05 05 23 00-1617	EA	3/4" Diameter x 3-7/8" Long, Welded Shear Stud Connector	10.83	
05 05 23 00-1618	EA	3/4" Diameter x 4-3/16" Long, Welded Shear Stud Connector	10.88	
05 05 23 00-1619	EA	3/4" Diameter x 4-3/8" Long, Welded Shear Stud Connector	11.35	
05 05 23 00-1620	EA	3/4" Diameter x 4-11/16" Long, Welded Shear Stud Connector	12.21	
05 05 23 00-1621	EA	3/4" Diameter x 4-7/8" Long, Welded Shear Stud Connector	20.57	
05 05 23 00-1622	EA	3/4" Diameter x 5-3/16" Long, Welded Shear Stud Connector	13.21	
05 05 23 00-1623	EA	3/4" Diameter x 5-3/8" Long, Welded Shear Stud Connector	14.74	
05 05 23 00-1624	EA	3/4" Diameter x 6-3/16" Long, Welded Shear Stud Connector	19.29	
05 05 23 00-1625	EA	3/4" Diameter x 7-3/16" Long, Welded Shear Stud Connector	19.76	
05 05 23 00-1626	EA	3/4" Diameter x 8-3/16" Long, Welded Shear Stud Connector	21.43	
05 05 23 00-1627	EA	3/4" Diameter x 10-3/16" Long, Welded Shear Stud Connector	28.42	

05 05 23 00-1628 7/8" Diameter Welded Shear Stud Connector *(05 05 23 00-1613)*

05 05 23 00-1629	EA	7/8" Diameter x 3-3/16" Long, Welded Shear Stud Connector	12.38	
05 05 23 00-1630	EA	7/8" Diameter x 3-11/16" Long, Welded Shear Stud Connector	13.05	
05 05 23 00-1631	EA	7/8" Diameter x 4-3/16" Long, Welded Shear Stud Connector	13.71	
05 05 23 00-1632	EA	7/8" Diameter x 5-3/16" Long, Welded Shear Stud Connector	15.63	
05 05 23 00-1633	EA	7/8" Diameter x 6-3/16" Long, Welded Shear Stud Connector	20.32	
05 05 23 00-1634	EA	7/8" Diameter x 7-3/16" Long, Welded Shear Stud Connector	22.34	
05 05 23 00-1635	EA	7/8" Diameter x 8-3/16" Long, Welded Shear Stud Connector	24.34	
05 05 23 00-1636	EA	7/8" Diameter x 10-3/16" Long, Welded Shear Stud Connector	29.95	

05 05 23 00-1637 1" Diameter Welded Shear Stud Connector *(05 05 23 00-1613)*

05 05 23 00-1638	EA	1" Diameter x 3-1/4" Long, Welded Shear Stud Connector	16.74	
05 05 23 00-1639	EA	1" Diameter x 4-1/4" Long, Welded Shear Stud Connector	18.79	
05 05 23 00-1640	EA	1" Diameter x 5-1/4" Long, Welded Shear Stud Connector	21.82	
05 05 23 00-1641	EA	1" Diameter x 6-1/4" Long, Welded Shear Stud Connector	27.89	
05 05 23 00-1642	EA	1" Diameter x 7-1/4" Long, Welded Shear Stud Connector	31.06	
05 05 23 00-1643	EA	1" Diameter x 8-1/4" Long, Welded Shear Stud Connector	34.22	

05 10 Structural Metal Framing *(05)*

05 12 Structural Steel Framing *(05 10)*

05 12 23 Structural Steel for Buildings *(05 12)*

See CSI section 05 05 21 00-0007 for moment connection welding, 05 12 23 00-0131 for field fabrication of additional structural metal connections.

05 12 23 00-0001 Rolled Steel Members *(05 12 23)*

Note: Prices by Ton (or Lb.) are based on ASTM A992/A36 steel with bolted standard beam connections and shop primed with red primer paint. Stock cross-sections only. Includes shop fabrication into sub-assemblies and delivery to site, all connecting bolts, connecting welds, and crane for erection (or demolition). Excludes moment connection welding. See CSI section 05 05 21 00-0007 for moment connection welding, 05 12 23 00-0131 for field fabrication of additional structural metal connections.

05 12 23 00-0002 Beams, Girders And Columns *(05 12 23 00-0001)*

Note: For one and two story I beams and W shapes and HP shapes.

05 12 23 00-0003	TON	Up To 30 Lb./LF Beams, Girders And Columns	11,457.24	1,439.31
		For ASTM A242 Type 2 High Strength Steel, Add	*678.37*	
		For Hot Dip Galvanizing, Add	*2,374.29*	
		For >10 To 25 Tons, Deduct	*-720.77*	
		For >25 To 50 Tons, Deduct	*-1,483.93*	
		For >50 To 75 Tons, Deduct	*-2,119.90*	
		For >75 Tons, Deduct	*-1,059.95*	
05 12 23 00-0004	TON	>30-65 Lb./LF Beams, Girders And Columns	7,951.84	930.42
		For ASTM A242 Type 2 High Strength Steel, Add	*556.74*	
		For Hot Dip Galvanizing, Add	*1,948.60*	
		For >10 To 25 Tons, Deduct	*-591.54*	
		For >25 To 50 Tons, Deduct	*-1,217.88*	
		For >50 To 75 Tons, Deduct	*-1,739.82*	
		For >75 Tons, Deduct	*-869.91*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0005	TON	>65-100 Lb./LF Beams, Girders And Columns	6,736.64	523.41
		For ASTM A242 Type 2 High Strength Steel, Add	*494.27*	
		For Hot Dip Galvanizing, Add	*1,729.94*	
		For >10 To 25 Tons, Deduct	*-525.16*	
		For >25 To 50 Tons, Deduct	*-1,081.21*	
		For >50 To 75 Tons, Deduct	*-1,544.59*	
		For >75 Tons, Deduct	*-772.29*	
05 12 23 00-0006	TON	>100-300 Lb./LF Beams, Girders And Columns	4,521.38	278.60
		For ASTM A242 Type 2 High Strength Steel, Add	*337.89*	
		For Hot Dip Galvanizing, Add	*1,182.61*	
		For >10 To 25 Tons, Deduct	*-359.01*	
		For >25 To 50 Tons, Deduct	*-739.13*	
		For >50 To 75 Tons, Deduct	*-1,055.91*	
		For >75 Tons, Deduct	*-527.95*	

05 12 23 00-0007 Trusses, Built-Up *(05 12 23 00-0001)*

05 12 23 00-0008	TON	Built-Up Trusses, Rolled Structural Steel Members	8,437.22	978.86
		For ASTM A242 Type 2 High Strength Steel, Add	*591.49*	
		For Hot Dip Galvanizing, Add	*2,070.22*	
		For >10 To 25 Tons, Deduct	*-628.46*	
		For >25 To 50 Tons, Deduct	*-1,293.89*	
		For >50 To 75 Tons, Deduct	*-1,848.42*	
		For >75 Tons, Deduct	*-924.21*	

05 12 23 00-0009 Shapes *(05 12 23 00-0001)*

05 12 23 00-0010 Rolled Shape Steel Angles *(05 12 23 00-0009)*

05 12 23 00-0011	TON	Up To 10 Lb./LF Rolled Shape Steel Angles	16,705.22	2,675.68
		For ASTM A242 Type 2 High Strength Steel, Add	*979.66*	
		For Hot Dip Galvanizing, Add	*3,428.81*	
		For >10 To 25 Tons, Deduct	*-1,040.89*	
		For >25 To 50 Tons, Deduct	*-2,143.00*	
		For >50 To 75 Tons, Deduct	*-3,061.44*	
		For >75 Tons, Deduct	*-1,530.72*	
05 12 23 00-0012	TON	>10 To 20 Lb./LF Rolled Shape Steel Angles	14,691.95	1,570.23
		For ASTM A242 Type 2 High Strength Steel, Add	*937.15*	
		For Hot Dip Galvanizing, Add	*3,280.01*	
		For >10 To 25 Tons, Deduct	*-995.72*	
		For >25 To 50 Tons, Deduct	*-2,050.01*	
		For >50 To 75 Tons, Deduct	*-2,928.58*	
		For >75 Tons, Deduct	*-1,464.29*	
05 12 23 00-0013	TON	>20 To 58 Lb./LF Rolled Shape Steel Angles	11,297.30	930.42
		For ASTM A242 Type 2 High Strength Steel, Add	*824.39*	
		For Hot Dip Galvanizing, Add	*2,885.37*	
		For >10 To 25 Tons, Deduct	*-875.92*	
		For >25 To 50 Tons, Deduct	*-1,803.36*	
		For >50 To 75 Tons, Deduct	*-2,576.23*	
		For >75 Tons, Deduct	*-1,288.11*	

05 12 23 00-0014 Rolled C, MC Steel Channels *(05 12 23 00-0009)*

05 12 23 00-0015	TON	Up To 10 Lb./LF Rolled C, MC Steel Channels	18,196.14	3,663.89
		For ASTM A242 Type 2 High Strength Steel, Add	*964.87*	
		For Hot Dip Galvanizing, Add	*3,377.05*	
		For >10 To 25 Tons, Deduct	*-1,025.18*	
		For >25 To 50 Tons, Deduct	*-2,110.66*	
		For >50 To 75 Tons, Deduct	*-3,015.23*	
		For >75 Tons, Deduct	*-1,507.61*	
05 12 23 00-0016	TON	>10 To 20 Rolled C, MC Steel Channels	14,530.22	2,791.53
		For ASTM A242 Type 2 High Strength Steel, Add	*924.21*	
		For Hot Dip Galvanizing, Add	*3,234.73*	
		For >10 To 25 Tons, Deduct	*-981.97*	
		For >25 To 50 Tons, Deduct	*-2,021.70*	
		For >50 To 75 Tons, Deduct	*-2,888.15*	
		For >75 Tons, Deduct	*-1,444.07*	
05 12 23 00-0017	TON	>20 To 58 Lb./LF Rolled C, MC Steel Channels	11,112.46	930.42
		For ASTM A242 Type 2 High Strength Steel, Add	*809.61*	
		For Hot Dip Galvanizing, Add	*2,833.62*	
		For >10 To 25 Tons, Deduct	*-860.21*	
		For >25 To 50 Tons, Deduct	*-1,771.01*	
		For >50 To 75 Tons, Deduct	*-2,530.02*	
		For >75 Tons, Deduct	*-1,265.01*	

05 12 23 00-0018 Double L Shape Steel Angles *(05 12 23 00-0009)*

05 12 23 00-0019	TON	Up To 20 Lb./LF Double L Shape Steel Angles	15,499.88	2,122.96
		For ASTM A242 Type 2 High Strength Steel, Add	*942.69*	
		For Hot Dip Galvanizing, Add	*3,299.42*	
		For >10 To 25 Tons, Deduct	*-1,001.61*	
		For >25 To 50 Tons, Deduct	*-2,062.14*	
		For >50 To 75 Tons, Deduct	*-2,945.91*	
		For >75 Tons, Deduct	*-1,472.96*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0020	TON	>20 To 50 Lb./LF Double L Shape Steel Angles	12,082.87	930.42
		For ASTM A242 Type 2 High Strength Steel, Add	*887.24*	
		For Hot Dip Galvanizing, Add	*3,105.33*	
		For >10 To 25 Tons, Deduct	*-942.69*	
		For >25 To 50 Tons, Deduct	*-1,940.83*	
		For >50 To 75 Tons, Deduct	*-2,772.62*	
		For >75 Tons, Deduct	*-1,386.31*	
05 12 23 00-0021	TON	>50 To 80 Lb./LF Double L Shape Steel Angles	9,107.22	523.41
		For ASTM A242 Type 2 High Strength Steel, Add	*683.91*	
		For Hot Dip Galvanizing, Add	*2,393.70*	
		For >10 To 25 Tons, Deduct	*-726.66*	
		For >25 To 50 Tons, Deduct	*-1,496.06*	
		For >50 To 75 Tons, Deduct	*-2,137.23*	
		For >75 Tons, Deduct	*-1,068.62*	
05 12 23 00-0022	TON	>80 To 115 Lb./LF Double L Shape Steel Angles	5,842.53	279.01
		For ASTM A242 Type 2 High Strength Steel, Add	*443.62*	
		For Hot Dip Galvanizing, Add	*1,552.67*	
		For >10 To 25 Tons, Deduct	*-471.35*	
		For >25 To 50 Tons, Deduct	*-970.42*	
		For >50 To 75 Tons, Deduct	*-1,386.31*	
		For >75 Tons, Deduct	*-693.16*	

05 12 23 00-0023 Structural WT, MT, ST Tee Shapes *(05 12 23 00-0001)*

05 12 23 00-0024	TON	Up To 30 Lb./LF Structural WT, MT, ST Tee Shapes	14,068.11	1,570.23
		For ASTM A242 Type 2 High Strength Steel, Add	*887.24*	
		For Hot Dip Galvanizing, Add	*3,105.33*	
		For >10 To 25 Tons, Deduct	*-942.69*	
		For >25 To 50 Tons, Deduct	*-1,940.83*	
		For >50 To 75 Tons, Deduct	*-2,772.62*	
		For >75 Tons, Deduct	*-1,386.31*	
05 12 23 00-0025	TON	>30 To 65 Lb./LF Structural WT, MT, ST Tee Shapes	9,472.15	930.42
		For ASTM A242 Type 2 High Strength Steel, Add	*678.37*	
		For Hot Dip Galvanizing, Add	*2,374.29*	
		For >10 To 25 Tons, Deduct	*-720.77*	
		For >25 To 50 Tons, Deduct	*-1,483.93*	
		For >50 To 75 Tons, Deduct	*-2,119.90*	
		For >75 Tons, Deduct	*-1,059.95*	
05 12 23 00-0026	TON	>65 To 100 Lb./LF Structural WT, MT, ST Tee Shapes	7,489.85	523.41
		For ASTM A242 Type 2 High Strength Steel, Add	*554.52*	
		For Hot Dip Galvanizing, Add	*1,940.83*	
		For >10 To 25 Tons, Deduct	*-589.18*	
		For >25 To 50 Tons, Deduct	*-1,213.02*	
		For >50 To 75 Tons, Deduct	*-1,732.89*	
		For >75 Tons, Deduct	*-866.44*	
05 12 23 00-0027	TON	>100 To 365 Lb./LF Structural WT, MT, ST Tee Shapes	5,519.53	278.60
		For ASTM A242 Type 2 High Strength Steel, Add	*417.74*	
		For Hot Dip Galvanizing, Add	*1,462.10*	
		For >10 To 25 Tons, Deduct	*-443.85*	
		For >25 To 50 Tons, Deduct	*-913.81*	
		For >50 To 75 Tons, Deduct	*-1,305.44*	
		For >75 Tons, Deduct	*-652.72*	

05 12 23 00-0028 Combination Section Shapes *(05 12 23 00-0001)*

05 12 23 00-0029 Combination Section, W Shapes And Angles *(05 12 23 00-0028)*

05 12 23 00-0030	TON	Up To 30 Lb./LF Combination Section - W Shapes And Angles	13,351.85	1,570.23
		For ASTM A242 Type 2 High Strength Steel, Add	*829.94*	
		For Hot Dip Galvanizing, Add	*2,904.78*	
		For >10 To 25 Tons, Deduct	*-881.81*	
		For >25 To 50 Tons, Deduct	*-1,815.49*	
		For >50 To 75 Tons, Deduct	*-2,593.56*	
		For >75 Tons, Deduct	*-1,296.78*	
05 12 23 00-0031	TON	>30-65 Lb./LF Combination Section - W Shapes And Angles	9,541.48	930.42
		For ASTM A242 Type 2 High Strength Steel, Add	*683.91*	
		For Hot Dip Galvanizing, Add	*2,393.70*	
		For >10 To 25 Tons, Deduct	*-726.66*	
		For >25 To 50 Tons, Deduct	*-1,496.06*	
		For >50 To 75 Tons, Deduct	*-2,137.23*	
		For >75 Tons, Deduct	*-1,068.62*	
05 12 23 00-0032	TON	>65-100 Lb./LF Combination Section - W Shapes And Angles	6,912.22	523.41
		For ASTM A242 Type 2 High Strength Steel, Add	*508.31*	
		For Hot Dip Galvanizing, Add	*1,779.10*	
		For >10 To 25 Tons, Deduct	*-540.08*	
		For >25 To 50 Tons, Deduct	*-1,111.94*	
		For >50 To 75 Tons, Deduct	*-1,588.48*	
		For >75 Tons, Deduct	*-794.24*	
05 12 23 00-0033	TON	>100-300 Lb./LF Combination Section - W Shapes And Angles	5,981.17	278.60
		For ASTM A242 Type 2 High Strength Steel, Add	*454.71*	
		For Hot Dip Galvanizing, Add	*1,591.49*	
		For >10 To 25 Tons, Deduct	*-483.13*	
		For >25 To 50 Tons, Deduct	*-994.68*	
		For >50 To 75 Tons, Deduct	*-1,420.97*	
		For >75 Tons, Deduct	*-710.49*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0034	TON	>300-500 Lb./LF Combination Section - W Shapes And Angles	5,162.72	139.86
		For ASTM A242 Type 2 High Strength Steel, Add	*401.11*	
		For Hot Dip Galvanizing, Add	*1,403.88*	
		For >10 To 25 Tons, Deduct	*-426.18*	
		For >25 To 50 Tons, Deduct	*-877.42*	
		For >50 To 75 Tons, Deduct	*-1,253.46*	
		For >75 Tons, Deduct	*-626.73*	

05 12 23 00-0035 Combination Section, S Shapes And Angles *(05 12 23 00-0028)*

05 12 23 00-0036	TON	>30-65 Lb./LF Combination Section - S Shapes And Angles	9,171.78	930.42
		For ASTM A242 Type 2 High Strength Steel, Add	*654.34*	
		For Hot Dip Galvanizing, Add	*2,290.18*	
		For >10 To 25 Tons, Deduct	*-695.23*	
		For >25 To 50 Tons, Deduct	*-1,431.37*	
		For >50 To 75 Tons, Deduct	*-2,044.81*	
		For >75 Tons, Deduct	*-1,022.40*	
05 12 23 00-0037	TON	>65-100 Lb./LF Combination Section - S Shapes And Angles	6,935.33	523.41
		For ASTM A242 Type 2 High Strength Steel, Add	*510.16*	
		For Hot Dip Galvanizing, Add	*1,785.57*	
		For >10 To 25 Tons, Deduct	*-542.05*	
		For >25 To 50 Tons, Deduct	*-1,115.98*	
		For >50 To 75 Tons, Deduct	*-1,594.26*	
		For >75 Tons, Deduct	*-797.13*	

05 12 23 00-0038 Combination Section, Channels And Angles *(05 12 23 00-0028)*

05 12 23 00-0039	TON	Up To 30 Lb./LF Combination Section - Channels And Angles	14,068.11	1,570.23
		For ASTM A242 Type 2 High Strength Steel, Add	*887.24*	
		For Hot Dip Galvanizing, Add	*3,105.33*	
		For >10 To 25 Tons, Deduct	*-942.69*	
		For >25 To 50 Tons, Deduct	*-1,940.83*	
		For >50 To 75 Tons, Deduct	*-2,772.62*	
		For >75 Tons, Deduct	*-1,386.31*	
05 12 23 00-0040	TON	>30-65 Lb./LF Combination Section - Channels And Angles	10,003.57	930.42
		For ASTM A242 Type 2 High Strength Steel, Add	*720.88*	
		For Hot Dip Galvanizing, Add	*2,523.09*	
		For >10 To 25 Tons, Deduct	*-765.94*	
		For >25 To 50 Tons, Deduct	*-1,576.93*	
		For >50 To 75 Tons, Deduct	*-2,252.76*	
		For >75 Tons, Deduct	*-1,126.38*	
05 12 23 00-0041	TON	>65-100 Lb./LF Combination Section - Channels And Angles	7,097.06	523.41
		For ASTM A242 Type 2 High Strength Steel, Add	*523.10*	
		For Hot Dip Galvanizing, Add	*1,830.85*	
		For >10 To 25 Tons, Deduct	*-555.79*	
		For >25 To 50 Tons, Deduct	*-1,144.28*	
		For >50 To 75 Tons, Deduct	*-1,634.69*	
		For >75 Tons, Deduct	*-817.35*	

05 12 23 00-0042 Standard Weight Pipe *(05 12 23 00-0001)*

05 12 23 00-0043	TON	1/2" To 5" Diameter Standard Weight Pipe	8,102.11	837.46
		For ASTM A242 Type 2 High Strength Steel, Add	*576.71*	
		For Hot Dip Galvanizing, Add	*2,018.47*	
		For >10 To 25 Tons, Deduct	*-612.75*	
		For >25 To 50 Tons, Deduct	*-1,261.54*	
		For >50 To 75 Tons, Deduct	*-1,802.21*	
		For >75 Tons, Deduct	*-901.10*	
05 12 23 00-0044	TON	>5" To 12" Diameter Standard Weight Pipe	8,648.90	1,046.83
		For ASTM A242 Type 2 High Strength Steel, Add	*602.58*	
		For Hot Dip Galvanizing, Add	*2,109.04*	
		For >10 To 25 Tons, Deduct	*-640.24*	
		For >25 To 50 Tons, Deduct	*-1,318.15*	
		For >50 To 75 Tons, Deduct	*-1,883.07*	
		For >75 Tons, Deduct	*-941.54*	

05 12 23 00-0045 Temporary Steel Support For Structures *(05 12 23 00-0001)*

Note: Includes removal after use.

05 12 23 00-0046	TON	Up To 30 Lb./LF Temporary Steel Support For Structures	11,457.24
		Note: For all stock sections.	
05 12 23 00-0047	TON	>30 Lb./LF Temporary Steel Support For Structures	7,951.84
		Note: For all stock sections.	

05 12 23 00-0048 Structural Steel Shapes *(05 12 23)*

Note: Prices by Ton (or Lb.) are based on ASTM A992/A36 steel with bolted standard beam connections and shop primed with red primer paint. Stock cross-sections only. Includes shop fabrication into sub-assemblies and delivery to site, all connecting bolts, connecting welds, and crane for erection (or demolition). Excludes moment connection welding. See CSI section 05 05 21 00-0007 for moment connection welding, 05 12 23 00-0131 for field fabrication of additional structural metal connections.

05 12 23 00-0049 Steel Rods *(05 12 23 00-0048)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0050	TON	1/2" To 5" Diameter Extra Strong Steel, Solid	8,738.48	654.34
		For ASTM A242 Type 2 High Strength Steel, Add	*643.25*	
		For Hot Dip Galvanizing, Add	*2,251.37*	
		For >10 To 25 Tons, Deduct	*-683.45*	
		For >25 To 50 Tons, Deduct	*-1,407.11*	
		For >50 To 75 Tons, Deduct	*-2,010.15*	
		For >75 Tons, Deduct	*-1,005.08*	
05 12 23 00-0051	TON	>5" To 12" Diameter Extra Strong Steel, Solid	10,003.57	930.42
		For ASTM A242 Type 2 High Strength Steel, Add	*720.88*	
		For Hot Dip Galvanizing, Add	*2,523.09*	
		For >10 To 25 Tons, Deduct	*-765.94*	
		For >25 To 50 Tons, Deduct	*-1,576.93*	
		For >50 To 75 Tons, Deduct	*-2,252.76*	
		For >75 Tons, Deduct	*-1,126.38*	

05 12 23 00-0052 Column Base Plates *(05 12 23 00-0048)*

05 12 23 00-0053	LB	Column Base Plates, Up To 150 Lb. / Each, A36 Miscellaneous Steel Items	4.36	0.84
		For ASTM A242 Type 2 High Strength Steel, Add	*0.28*	
		For Hot Dip Galvanizing, Add	*0.97*	
05 12 23 00-0054	LB	Column Base Plates, >150 Lb. / Each, A36 Miscellaneous Steel Items	4.09	0.71
		For ASTM A242 Type 2 High Strength Steel, Add	*0.26*	
		For Hot Dip Galvanizing, Add	*0.92*	
05 12 23 00-0055	TON	Column Base Plates, Up To 150 Lb. Each, A36 Miscellaneous Steel Items	7,945.73	748.53
		For ASTM A242 Type 2 High Strength Steel, Add	*571.78*	
		For Hot Dip Galvanizing, Add	*2,001.24*	
		For >10 To 25 Tons, Deduct	*-607.52*	
		For >25 To 50 Tons, Deduct	*-1,250.78*	
		For >50 To 75 Tons, Deduct	*-1,786.83*	
		For >75 Tons, Deduct	*-893.41*	
05 12 23 00-0056	TON	Column Base Plates, >150 Lb. Each, A36 Miscellaneous Steel Items	5,648.61	449.12
		For ASTM A242 Type 2 High Strength Steel, Add	*413.56*	
		For Hot Dip Galvanizing, Add	*1,447.47*	
		For >10 To 25 Tons, Deduct	*-439.41*	
		For >25 To 50 Tons, Deduct	*-904.67*	
		For >50 To 75 Tons, Deduct	*-1,292.39*	
		For >75 Tons, Deduct	*-646.19*	

05 12 23 00-0057 Double Extra Strong Pipes *(05 12 23 00-0048)*

05 12 23 00-0058	TON	2" To 5" Diameter Double Extra Strong Pipe	10,471.99	1,196.31
		For ASTM A242 Type 2 High Strength Steel, Add	*735.67*	
		For Hot Dip Galvanizing, Add	*2,574.84*	
		For >10 To 25 Tons, Deduct	*-781.65*	
		For >25 To 50 Tons, Deduct	*-1,609.28*	
		For >50 To 75 Tons, Deduct	*-2,298.97*	
		For >75 Tons, Deduct	*-1,149.48*	
05 12 23 00-0059	TON	>5" To 8" Diameter Double Extra Strong Pipe	9,883.01	644.15
		For ASTM A242 Type 2 High Strength Steel, Add	*735.67*	
		For Hot Dip Galvanizing, Add	*2,574.84*	
		For >10 To 25 Tons, Deduct	*-781.65*	
		For >25 To 50 Tons, Deduct	*-1,609.28*	
		For >50 To 75 Tons, Deduct	*-2,298.97*	
		For >75 Tons, Deduct	*-1,149.48*	

05 12 23 00-0060 Structural Pipes *(05 12 23 00-0048)*

05 12 23 00-0061	TON	3" To 5" Outside Diameter Structural Pipe, Extra Heavy A36 Miscellaneous Steel Items	7,319.88	552.72
		For ASTM A242 Type 2 High Strength Steel, Add	*517.56*	
		For Hot Dip Galvanizing, Add	*1,811.45*	
		For >10 To 25 Tons, Deduct	*-549.90*	
		For >25 To 50 Tons, Deduct	*-1,132.15*	
		For >50 To 75 Tons, Deduct	*-1,617.36*	
		For >75 Tons, Deduct	*-808.68*	
05 12 23 00-0062	TON	>5" To 12" Outside Diameter Structural Pipe, Extra Heavy A36 Miscellaneous Steel Items	7,875.76	637.45
		For ASTM A242 Type 2 High Strength Steel, Add	*517.56*	
		For Hot Dip Galvanizing, Add	*1,811.45*	
		For >10 To 25 Tons, Deduct	*-549.90*	
		For >25 To 50 Tons, Deduct	*-1,132.15*	
		For >50 To 75 Tons, Deduct	*-1,617.36*	
		For >75 Tons, Deduct	*-808.68*	

05 12 23 00-0063 Structural Tubing *(05 12 23 00-0048)*

05 12 23 00-0064 Rectangle Structural Tubing *(05 12 23 00-0063)*

05 12 23 00-0065	TON	3" x 2" Weight Range 5-7 Lb./LF Structural Tubing - Rectangle	12,148.12	558.30
		For ASTM A242 Type 2 High Strength Steel, Add	*924.21*	
		For Hot Dip Galvanizing, Add	*3,234.73*	
		For >10 To 25 Tons, Deduct	*-981.97*	
		For >25 To 50 Tons, Deduct	*-2,021.70*	
		For >50 To 75 Tons, Deduct	*-2,888.15*	
		For >75 Tons, Deduct	*-1,444.07*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0066	TON 4" x 3", 2" Weight Range 6-13 Lb./LF Structural Tubing - Rectangle	12,239.74	644.15
	For ASTM A242 Type 2 High Strength Steel, Add	*924.21*	
	For Hot Dip Galvanizing, Add	*3,234.73*	
	For >10 To 25 Tons, Deduct	*-981.97*	
	For >25 To 50 Tons, Deduct	*-2,021.70*	
	For >50 To 75 Tons, Deduct	*-2,888.15*	
	For >75 Tons, Deduct	*-1,444.07*	
05 12 23 00-0067	TON 5" x 4", 3", 2" Weight Range 8-20 Lb./LF Structural Tubing - Rectangle	10,679.64	697.88
	For ASTM A242 Type 2 High Strength Steel, Add	*794.82*	
	For Hot Dip Galvanizing, Add	*2,781.86*	
	For >10 To 25 Tons, Deduct	*-844.49*	
	For >25 To 50 Tons, Deduct	*-1,738.67*	
	For >50 To 75 Tons, Deduct	*-2,483.81*	
	For >75 Tons, Deduct	*-1,241.90*	
05 12 23 00-0068	TON 6" x 4", 3", 2" Weight Range 9-29 Lb./LF Structural Tubing - Rectangle	10,135.36	837.46
	For ASTM A242 Type 2 High Strength Steel, Add	*739.37*	
	For Hot Dip Galvanizing, Add	*2,587.78*	
	For >10 To 25 Tons, Deduct	*-785.58*	
	For >25 To 50 Tons, Deduct	*-1,617.36*	
	For >50 To 75 Tons, Deduct	*-2,310.52*	
	For >75 Tons, Deduct	*-1,155.26*	
05 12 23 00-0069	TON 7" x 5", 4", 3" Weight Range 12-35 Lb./LF Structural Tubing - Rectangle	9,964.45	930.42
	For ASTM A242 Type 2 High Strength Steel, Add	*717.75*	
	For Hot Dip Galvanizing, Add	*2,512.13*	
	For >10 To 25 Tons, Deduct	*-762.61*	
	For >25 To 50 Tons, Deduct	*-1,570.08*	
	For >50 To 75 Tons, Deduct	*-2,242.98*	
	For >75 Tons, Deduct	*-1,121.49*	
05 12 23 00-0070	TON 8" x 6", 4", 3", 2" Weight Range 11-42 Lb./LF Structural Tubing - Rectangle	10,133.85	1,287.59
	For ASTM A242 Type 2 High Strength Steel, Add	*700.83*	
	For Hot Dip Galvanizing, Add	*2,452.91*	
	For >10 To 25 Tons, Deduct	*-744.63*	
	For >25 To 50 Tons, Deduct	*-1,533.07*	
	For >50 To 75 Tons, Deduct	*-2,190.10*	
	For >75 Tons, Deduct	*-1,095.05*	
05 12 23 00-0071	TON 10" x 6", 4", 2" Weight Range 15-50 Lb./LF Structural Tubing - Rectangle	10,549.39	1,702.14
	For ASTM A242 Type 2 High Strength Steel, Add	*698.70*	
	For Hot Dip Galvanizing, Add	*2,445.45*	
	For >10 To 25 Tons, Deduct	*-742.37*	
	For >25 To 50 Tons, Deduct	*-1,528.41*	
	For >50 To 75 Tons, Deduct	*-2,183.44*	
	For >75 Tons, Deduct	*-1,091.72*	
05 12 23 00-0072	TON 12" x 6", 4", 2" Weight Range 17-76 Lb./LF Structural Tubing - Rectangle	10,809.51	1,859.31
	For ASTM A242 Type 2 High Strength Steel, Add	*706.09*	
	For Hot Dip Galvanizing, Add	*2,471.33*	
	For >10 To 25 Tons, Deduct	*-750.23*	
	For >25 To 50 Tons, Deduct	*-1,544.58*	
	For >50 To 75 Tons, Deduct	*-2,206.55*	
	For >75 Tons, Deduct	*-1,103.27*	
05 12 23 00-0073	TON 14" x 10", 6", 4" Weight Range 29-76 Lb./LF Structural Tubing - Rectangle	11,059.41	2,093.65
	For ASTM A242 Type 2 High Strength Steel, Add	*706.09*	
	For Hot Dip Galvanizing, Add	*2,471.33*	
	For >10 To 25 Tons, Deduct	*-750.23*	
	For >25 To 50 Tons, Deduct	*-1,544.58*	
	For >50 To 75 Tons, Deduct	*-2,206.55*	
	For >75 Tons, Deduct	*-1,103.27*	
05 12 23 00-0074	TON 16" x 12", 8", 4" Weight Range 40-90 Lb./LF Structural Tubing - Rectangle	11,711.39	2,791.53
	For ASTM A242 Type 2 High Strength Steel, Add	*698.70*	
	For Hot Dip Galvanizing, Add	*2,445.45*	
	For >10 To 25 Tons, Deduct	*-742.37*	
	For >25 To 50 Tons, Deduct	*-1,528.41*	
	For >50 To 75 Tons, Deduct	*-2,183.44*	
	For >75 Tons, Deduct	*-1,091.72*	
05 12 23 00-0075	TON 18" x 6", 4" Weight Range 48-76 Lb./LF Structural Tubing - Rectangle	13,194.36	4,398.48
	For ASTM A242 Type 2 High Strength Steel, Add	*680.22*	
	For Hot Dip Galvanizing, Add	*2,380.76*	
	For >10 To 25 Tons, Deduct	*-722.73*	
	For >25 To 50 Tons, Deduct	*-1,487.97*	
	For >50 To 75 Tons, Deduct	*-2,125.68*	
	For >75 Tons, Deduct	*-1,062.84*	
05 12 23 00-0076	TON 20" x 12", 8", 4" Weight Range 48-105 Lb./LF Structural Tubing - Rectangle	14,969.24	6,422.34
	For ASTM A242 Type 2 High Strength Steel, Add	*649.51*	
	For Hot Dip Galvanizing, Add	*2,273.28*	
	For >10 To 25 Tons, Deduct	*-690.10*	
	For >25 To 50 Tons, Deduct	*-1,420.80*	
	For >50 To 75 Tons, Deduct	*-2,029.71*	
	For >75 Tons, Deduct	*-1,014.86*	
05 12 23 00-0077	Square Structural Tubing *(05 12 23 00-0063)*		
05 12 23 00-0078	TON 2" x 2" Weight Range 4-6 Lb./LF Structural Tubing - Square	12,110.89	523.41
	For ASTM A242 Type 2 High Strength Steel, Add	*924.21*	
	For Hot Dip Galvanizing, Add	*3,234.73*	
	For >10 To 25 Tons, Deduct	*-981.97*	
	For >25 To 50 Tons, Deduct	*-2,021.70*	
	For >50 To 75 Tons, Deduct	*-2,888.15*	
	For >75 Tons, Deduct	*-1,444.07*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0079	TON	2.5" x 2.5" Weight Range 5-8 Lb./LF Structural Tubing - Square	12,148.12	558.30
		For ASTM A242 Type 2 High Strength Steel, Add	*924.21*	
		For Hot Dip Galvanizing, Add	*3,234.73*	
		For >10 To 25 Tons, Deduct	*-981.97*	
		For >25 To 50 Tons, Deduct	*-2,021.70*	
		For >50 To 75 Tons, Deduct	*-2,888.15*	
		For >75 Tons, Deduct	*-1,444.07*	
05 12 23 00-0080	TON	3" x 3" Weight Range 6-11 Lb./LF Structural Tubing - Square	10,910.69	697.88
		For ASTM A242 Type 2 High Strength Steel, Add	*813.30*	
		For Hot Dip Galvanizing, Add	*2,846.56*	
		For >10 To 25 Tons, Deduct	*-864.13*	
		For >25 To 50 Tons, Deduct	*-1,779.10*	
		For >50 To 75 Tons, Deduct	*-2,541.57*	
		For >75 Tons, Deduct	*-1,270.79*	
05 12 23 00-0081	TON	3.5" x 3.5" Weight Range 8-13 Lb./LF Structural Tubing - Square	10,828.52	837.46
		For ASTM A242 Type 2 High Strength Steel, Add	*794.82*	
		For Hot Dip Galvanizing, Add	*2,781.86*	
		For >10 To 25 Tons, Deduct	*-844.49*	
		For >25 To 50 Tons, Deduct	*-1,738.67*	
		For >50 To 75 Tons, Deduct	*-2,483.81*	
		For >75 Tons, Deduct	*-1,241.90*	
05 12 23 00-0082	TON	4" x 4" Weight Range 10-22 Lb./LF Structural Tubing - Square	8,695.11	1,046.83
		For ASTM A242 Type 2 High Strength Steel, Add	*606.28*	
		For Hot Dip Galvanizing, Add	*2,121.98*	
		For >10 To 25 Tons, Deduct	*-644.17*	
		For >25 To 50 Tons, Deduct	*-1,326.24*	
		For >50 To 75 Tons, Deduct	*-1,894.63*	
		For >75 Tons, Deduct	*-947.31*	
05 12 23 00-0083	TON	5" x 5" Weight Range 12-30 Lb./LF Structural Tubing - Square	8,854.63	1,196.31
		For ASTM A242 Type 2 High Strength Steel, Add	*606.28*	
		For Hot Dip Galvanizing, Add	*2,121.98*	
		For >10 To 25 Tons, Deduct	*-644.17*	
		For >25 To 50 Tons, Deduct	*-1,326.24*	
		For >50 To 75 Tons, Deduct	*-1,894.63*	
		For >75 Tons, Deduct	*-947.31*	
05 12 23 00-0084	TON	6" x 6" Weight Range 15-35 Lb./LF Structural Tubing - Square	9,365.09	1,674.92
		For ASTM A242 Type 2 High Strength Steel, Add	*606.28*	
		For Hot Dip Galvanizing, Add	*2,121.98*	
		For >10 To 25 Tons, Deduct	*-644.17*	
		For >25 To 50 Tons, Deduct	*-1,326.24*	
		For >50 To 75 Tons, Deduct	*-1,894.63*	
		For >75 Tons, Deduct	*-947.31*	
05 12 23 00-0085	TON	7" x 7" Weight Range 17-42 Lb./LF Structural Tubing - Square	9,950.36	2,093.65
		For ASTM A242 Type 2 High Strength Steel, Add	*617.37*	
		For Hot Dip Galvanizing, Add	*2,160.80*	
		For >10 To 25 Tons, Deduct	*-655.96*	
		For >25 To 50 Tons, Deduct	*-1,350.50*	
		For >50 To 75 Tons, Deduct	*-1,929.28*	
		For >75 Tons, Deduct	*-964.64*	
05 12 23 00-0086	TON	8" x 8" Weight Range 20-60 Lb./LF Structural Tubing - Square	11,942.44	2,791.53
		For ASTM A242 Type 2 High Strength Steel, Add	*717.18*	
		For Hot Dip Galvanizing, Add	*2,510.15*	
		For >10 To 25 Tons, Deduct	*-762.01*	
		For >25 To 50 Tons, Deduct	*-1,568.84*	
		For >50 To 75 Tons, Deduct	*-2,241.20*	
		For >75 Tons, Deduct	*-1,120.60*	
05 12 23 00-0087	TON	10" x 10" Weight Range 33-77 Lb./LF Structural Tubing - Square	13,431.27	4,187.30
		For ASTM A242 Type 2 High Strength Steel, Add	*717.18*	
		For Hot Dip Galvanizing, Add	*2,510.15*	
		For >10 To 25 Tons, Deduct	*-762.01*	
		For >25 To 50 Tons, Deduct	*-1,568.84*	
		For >50 To 75 Tons, Deduct	*-2,241.20*	
		For >75 Tons, Deduct	*-1,120.60*	
05 12 23 00-0088	TON	12" x 12" Weight Range 40-80 Lb./LF Structural Tubing - Square	12,959.45	4,914.63
		For ASTM A242 Type 2 High Strength Steel, Add	*617.37*	
		For Hot Dip Galvanizing, Add	*2,160.80*	
		For >10 To 25 Tons, Deduct	*-655.96*	
		For >25 To 50 Tons, Deduct	*-1,350.50*	
		For >50 To 75 Tons, Deduct	*-1,929.28*	
		For >75 Tons, Deduct	*-964.64*	
05 12 23 00-0089	TON	14" x 14" Weight Range 57-90 Lb./LF Structural Tubing - Square	15,630.36	6,422.34
		For ASTM A242 Type 2 High Strength Steel, Add	*702.40*	
		For Hot Dip Galvanizing, Add	*2,458.39*	
		For >10 To 25 Tons, Deduct	*-746.30*	
		For >25 To 50 Tons, Deduct	*-1,536.49*	
		For >50 To 75 Tons, Deduct	*-2,194.99*	
		For >75 Tons, Deduct	*-1,097.50*	
05 12 23 00-0090	TON	16" x 16" Weight Range 65-105 Lb./LF Structural Tubing - Square	17,897.72	8,374.61
		For ASTM A242 Type 2 High Strength Steel, Add	*717.18*	
		For Hot Dip Galvanizing, Add	*2,510.15*	
		For >10 To 25 Tons, Deduct	*-762.01*	
		For >25 To 50 Tons, Deduct	*-1,568.84*	
		For >50 To 75 Tons, Deduct	*-2,241.20*	
		For >75 Tons, Deduct	*-1,120.60*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0091		**Galvanized Steel Pipe Tubing** *(05 12 23 00-0063)*		
		Note: ASTM A53 Grade B		
05 12 23 00-0092	LF	2" Diameter Galvanized Steel Pipe Tubing, Standard Weight	45.74	6.12
05 12 23 00-0093	LF	2-1/2" Diameter Galvanized Steel Pipe Tubing, Standard Weight	50.38	7.28
05 12 23 00-0094	LF	3" Diameter Galvanized Steel Pipe Tubing, Standard Weight	56.32	9.67
05 12 23 00-0095	LF	3-1/2" Diameter Galvanized Steel Pipe Tubing, Standard Weight	60.84	10.78
05 12 23 00-0096	LF	4" Diameter Galvanized Steel Pipe Tubing, Standard Weight	63.74	11.65
05 12 23 00-0097	LF	5" Diameter Galvanized Steel Pipe Tubing, Standard Weight	71.87	14.57
05 12 23 00-0098	LF	6" Diameter Galvanized Steel Pipe Tubing, Standard Weight	80.02	17.48
05 12 23 00-0099	LF	8" Diameter Galvanized Steel Pipe Tubing, Standard Weight	88.17	20.97
05 12 23 00-0100	LF	10" Diameter Galvanized Steel Pipe Tubing, Standard Weight	99.80	25.64
05 12 23 00-0101	LF	12" Diameter Galvanized Steel Pipe Tubing, Standard Weight	118.43	32.64
05 12 23 00-0102		**Structural Shapes** *(05 12 23 00-0048)*		
05 12 23 00-0103	TON	Up To 20 Lb./LF Structural Shapes, Steel Angle A36 Structural Steel, Purlins And Girts	9,227.33	2,994.10
		For ASTM A242 Type 2 High Strength Steel, Add	*357.98*	
		For Hot Dip Galvanizing, Add	*1,252.94*	
		For >20 To 50 Lb./LF, Deduct	*-1,160.36*	
		For >50 To 75 Lb./LF, Deduct	*-1,859.35*	
		For >75 To 100 Lb./LF, Deduct	*-2,558.35*	
		For >10 To 25 Tons, Deduct	*-380.36*	
		For >25 To 50 Tons, Deduct	*-783.09*	
		For >50 To 75 Tons, Deduct	*-1,118.70*	
		For >75 Tons, Deduct	*-559.35*	
05 12 23 00-0104	TON	Structural Shapes, Steel Plate A36 Structural Steel	8,986.43	1,197.64
		Note: Up to 21.5 Lb. per SF		
		For ASTM A242 Type 2 High Strength Steel, Add	*591.51*	
		For Hot Dip Galvanizing, Add	*2,070.27*	
		For >21.5 To 50 Lb./LF, Deduct	*-978.27*	
		For >10 To 25 Tons, Deduct	*-628.47*	
		For >25 To 50 Tons, Deduct	*-1,293.92*	
		For >50 To 75 Tons, Deduct	*-1,848.46*	
		For >75 Tons, Deduct	*-924.23*	
05 12 23 00-0105	LB	Up To 20 Lb./LF Structural Shapes, Primed Pipe Supports	5.24	0.27
05 12 23 00-0106	LB	Structural Shapes, Galvanized Pipe Supports	6.39	0.27
05 12 23 00-0107		**Built-Up Trusses** *(05 12 23 00-0048)*		
05 12 23 00-0108	TON	Up To 50 LF Span Average Weight 100 Lb./LF Trusses, Built-up	9,850.45	418.73
		For >10 To 25 Tons, Deduct	*-799.32*	
		For >25 To 50 Tons, Deduct	*-1,645.67*	
		For >50 To 75 Tons, Deduct	*-2,350.95*	
		For >75 Tons, Deduct	*-1,175.48*	
05 12 23 00-0109	TON	>50-100 LF Span Average Weight 120 Lb./LF Trusses, Built-up	9,744.36	232.54
		For >10 To 25 Tons, Deduct	*-807.18*	
		For >25 To 50 Tons, Deduct	*-1,661.84*	
		For >50 To 75 Tons, Deduct	*-2,374.06*	
		For >75 Tons, Deduct	*-1,187.03*	
05 12 23 00-0110	TON	>100-200 LF Span Average Weight 150 Lb./LF Trusses, Built-up	8,680.29	123.10
		For >10 To 25 Tons, Deduct	*-726.66*	
		For >25 To 50 Tons, Deduct	*-1,496.06*	
		For >50 To 75 Tons, Deduct	*-2,137.23*	
		For >75 Tons, Deduct	*-1,068.62*	
05 12 23 00-0111	TON	>200 LF Span Average Weight 180 Lb./LF Trusses, Built-up	8,441.93	116.41
		For >10 To 25 Tons, Deduct	*-707.02*	
		For >25 To 50 Tons, Deduct	*-1,455.63*	
		For >50 To 75 Tons, Deduct	*-2,079.47*	
		For >75 Tons, Deduct	*-1,039.73*	
05 12 23 00-0112		**Masonry Plates, Filler Plates, Sole Plates And Anchor Straps** *(05 12 23 00-0048)*		
		Note: Includes shop fabrication, welds, drilling and shop primer.		
05 12 23 00-0113	SF	1/4" Masonry Plates, Filler Plates, Sole Plates And Anchor Straps	32.62	8.63
05 12 23 00-0114	SF	3/8" Masonry Plates, Filler Plates, Sole Plates And Anchor Straps	48.92	12.90
05 12 23 00-0115	SF	1/2" Masonry Plates, Filler Plates, Sole Plates And Anchor Straps	65.23	17.20
05 12 23 00-0116	SF	5/8" Masonry Plates, Filler Plates, Sole Plates And Anchor Straps	81.53	21.49
05 12 23 00-0117	SF	3/4" Masonry Plates, Filler Plates, Sole Plates And Anchor Straps	97.84	25.66
05 12 23 00-0118	SF	7/8" Masonry Plates, Filler Plates, Sole Plates And Anchor Straps	114.15	30.08
05 12 23 00-0119	SF	1" Masonry Plates, Filler Plates, Sole Plates And Anchor Straps	130.45	34.38
05 12 23 00-0120	SF	1-1/8" Masonry Plates, Filler Plates, Sole Plates And Anchor Straps	146.75	38.68
05 12 23 00-0121	SF	1-1/4" Masonry Plates, Filler Plates, Sole Plates And Anchor Straps	163.07	42.98
05 12 23 00-0122	SF	1-3/8" Masonry Plates, Filler Plates, Sole Plates And Anchor Straps	179.37	47.28
05 12 23 00-0123	SF	1-1/2" Masonry Plates, Filler Plates, Sole Plates And Anchor Straps	195.68	51.58
05 12 23 00-0124	SF	1-5/8" Masonry Plates, Filler Plates, Sole Plates And Anchor Straps	211.99	55.88
05 12 23 00-0125	SF	1-3/4" Masonry Plates, Filler Plates, Sole Plates And Anchor Straps	228.30	60.17
05 12 23 00-0126	SF	1-7/8" Masonry Plates, Filler Plates, Sole Plates And Anchor Straps	244.61	64.47
05 12 23 00-0127	SF	2" Masonry Plates, Filler Plates, Sole Plates And Anchor Straps	260.91	68.77
05 12 23 00-0128		**Accessories For Steel** *(05 12 23)*		
05 12 23 00-0129		**Field Painting For Touch-Up Of Shop Prime Coat** *(05 12 23 00-0128)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0130	SF	Touch Up Paint - Type 1 Red Oxide Field Painting Prime Coat	1.46	
05 12 23 00-0131		**Connection And Stiffener Plates** *(05 12 23 00-0128)*		
		Note: For field fabrication of additional structural metal connections.		
05 12 23 00-0132	TON	1/8" Plate Weight 6.16 Lb./SF Connection And Stiffener Plates	21,345.21	
		For >10 To 25 Tons, Deduct	*-1,814.34*	
		For >25 To 50 Tons, Deduct	*-3,735.41*	
		For >50 To 75 Tons, Deduct	*-5,336.30*	
		For >75 Tons, Deduct	*-2,668.15*	
05 12 23 00-0133	TON	3/16" Plate Weight 8.71 Lb./SF Connection And Stiffener Plates	18,211.64	
		For >10 To 25 Tons, Deduct	*-1,547.99*	
		For >25 To 50 Tons, Deduct	*-3,187.04*	
		For >50 To 75 Tons, Deduct	*-4,552.91*	
		For >75 Tons, Deduct	*-2,276.46*	
05 12 23 00-0134	TON	1/4" Plate Weight 11.26 Lb./SF Connection And Stiffener Plates	14,083.44	
		For >10 To 25 Tons, Deduct	*-1,197.09*	
		For >25 To 50 Tons, Deduct	*-2,464.60*	
		For >50 To 75 Tons, Deduct	*-3,520.86*	
		For >75 Tons, Deduct	*-1,760.43*	
05 12 23 00-0135	TON	5/16" Plate Weight 13.81 Lb./SF Connection And Stiffener Plates	14,083.44	
		For >10 To 25 Tons, Deduct	*-1,197.09*	
		For >25 To 50 Tons, Deduct	*-2,464.60*	
		For >50 To 75 Tons, Deduct	*-3,520.86*	
		For >75 Tons, Deduct	*-1,760.43*	
05 12 23 00-0136	TON	3/8" Plate Weight 16.37 Lb./SF Connection And Stiffener Plates	14,083.44	
		For >10 To 25 Tons, Deduct	*-1,197.09*	
		For >25 To 50 Tons, Deduct	*-2,464.60*	
		For >50 To 75 Tons, Deduct	*-3,520.86*	
		For >75 Tons, Deduct	*-1,760.43*	
05 12 23 00-0137	TON	1/2" Plate Weight 21.47 Lb./SF Connection And Stiffener Plates	14,083.44	
		For >10 To 25 Tons, Deduct	*-1,197.09*	
		For >25 To 50 Tons, Deduct	*-2,464.60*	
		For >50 To 75 Tons, Deduct	*-3,520.86*	
		For >75 Tons, Deduct	*-1,760.43*	
05 12 23 00-0138	TON	9/16" Plate Weight 24.02 Lb./SF Connection And Stiffener Plates	14,083.44	
		For >10 To 25 Tons, Deduct	*-1,197.09*	
		For >25 To 50 Tons, Deduct	*-2,464.60*	
		For >50 To 75 Tons, Deduct	*-3,520.86*	
		For >75 Tons, Deduct	*-1,760.43*	
05 12 23 00-0139	TON	5/8" Plate Weight 26.58 Lb./SF Connection And Stiffener Plates	14,083.44	
		For >10 To 25 Tons, Deduct	*-1,197.09*	
		For >25 To 50 Tons, Deduct	*-2,464.60*	
		For >50 To 75 Tons, Deduct	*-3,520.86*	
		For >75 Tons, Deduct	*-1,760.43*	
05 12 23 00-0140	TON	3/4" Plate Weight 31.68 Lb./SF Connection And Stiffener Plates	13,203.22	
		For >10 To 25 Tons, Deduct	*-1,122.27*	
		For >25 To 50 Tons, Deduct	*-2,310.56*	
		For >50 To 75 Tons, Deduct	*-3,300.81*	
		For >75 Tons, Deduct	*-1,650.40*	
05 12 23 00-0141	TON	7/8" Plate Weight 36.78 Lb./SF Connection And Stiffener Plates	13,203.22	
		For >10 To 25 Tons, Deduct	*-1,122.27*	
		For >25 To 50 Tons, Deduct	*-2,310.56*	
		For >50 To 75 Tons, Deduct	*-3,300.81*	
		For >75 Tons, Deduct	*-1,650.40*	
05 12 23 00-0142	TON	1" Plate Weight 41.89 Lb./SF Connection And Stiffener Plates	13,203.22	
		For >10 To 25 Tons, Deduct	*-1,122.27*	
		For >25 To 50 Tons, Deduct	*-2,310.56*	
		For >50 To 75 Tons, Deduct	*-3,300.81*	
		For >75 Tons, Deduct	*-1,650.40*	
05 12 23 00-0143		**Field Applied Cold Galvanizing** *(05 12 23 00-0128)*		
05 12 23 00-0144	SF	Brush Applied Cold Galvanizing	2.02	
05 12 23 00-0145		**Metal Grinding** *(05 12 23 00-0128)*		
		Note: For use to prepare existing metal for welding by removing of rust or scale and smoothing surface after torch cutting.		
05 12 23 00-0146	SI	Metal Grinding Up To 1/32" Thickness To Be Removed	1.16	
		Note: Includes rust or scale removal on metal and smoothing surface.		
05 12 23 00-0147		**Structural Steel For Buildings And Structures** *(05 12 23)*		
		Note: Prices by Ton (or Lb.) are based on ASTM A992/A36 steel with bolted standard beam connections and shop primed with red primer paint. Stock cross-sections only. Includes shop fabrication into sub-assemblies and delivery to site, all connecting bolts, connecting welds, and crane for erection (or demolition). Excludes moment connection welding.		
05 12 23 00-0148		**First Tier A992/A36 Structural Steel Columns, W Shapes** *(05 12 23 00-0147)*		
		Note: With base plate. Includes material delivery and erection.		
05 12 23 00-0149	LF	W14 x 730 A992/A36 Structural Column	1,770.83	83.05
		For Hot Dip Galvanizing, Add	*466.84*	
		For High Strength Low Alloy A572-50 Steel, Add	*159.37*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*354.17*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0150	LF	W14 x 665 A992/A36 Structural Column	1,615.01	77.40
		For Hot Dip Galvanizing, Add	*425.27*	
		For High Strength Low Alloy A572-50 Steel, Add	*145.35*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*323.00*	
05 12 23 00-0151	LF	W14 x 605 A992/A36 Structural Column	1,471.05	72.05
		For Hot Dip Galvanizing, Add	*386.90*	
		For High Strength Low Alloy A572-50 Steel, Add	*132.39*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*294.21*	
05 12 23 00-0152	LF	W14 x 550 A992/A36 Structural Column	1,338.93	67.02
		For Hot Dip Galvanizing, Add	*351.73*	
		For High Strength Low Alloy A572-50 Steel, Add	*120.50*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*267.79*	
05 12 23 00-0153	LF	W14 x 500 A992/A36 Structural Column	1,229.71	72.58
		For Hot Dip Galvanizing, Add	*319.75*	
		For High Strength Low Alloy A572-50 Steel, Add	*110.67*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*245.94*	
05 12 23 00-0154	LF	W14 x 426 A992/A36 Structural Column	1,049.24	63.37
		For Hot Dip Galvanizing, Add	*272.43*	
		For High Strength Low Alloy A572-50 Steel, Add	*94.43*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*209.85*	
05 12 23 00-0155	LF	W14 x 342 A992/A36 Structural Column	848.55	54.85
		For Hot Dip Galvanizing, Add	*219.26*	
		For High Strength Low Alloy A572-50 Steel, Add	*76.37*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*169.71*	
05 12 23 00-0156	LF	W14 x 311 A992/A36 Structural Column	764.31	51.22
		For Hot Dip Galvanizing, Add	*196.93*	
		For High Strength Low Alloy A572-50 Steel, Add	*68.79*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*152.86*	
05 12 23 00-0157	LF	W14 x 283 A992/A36 Structural Column	693.80	48.29
		For Hot Dip Galvanizing, Add	*178.25*	
		For High Strength Low Alloy A572-50 Steel, Add	*62.44*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*138.76*	
05 12 23 00-0158	LF	W14 x 257 A992/A36 Structural Column	609.92	45.78
		For Hot Dip Galvanizing, Add	*155.71*	
		For High Strength Low Alloy A572-50 Steel, Add	*54.89*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*121.98*	
05 12 23 00-0159	LF	W14 x 233 A992/A36 Structural Column	561.30	42.57
		For Hot Dip Galvanizing, Add	*143.17*	
		For High Strength Low Alloy A572-50 Steel, Add	*50.52*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*112.26*	
05 12 23 00-0160	LF	W14 x 211 A992/A36 Structural Column	499.31	39.64
		For Hot Dip Galvanizing, Add	*126.82*	
		For High Strength Low Alloy A572-50 Steel, Add	*44.94*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*99.86*	
05 12 23 00-0161	LF	W14 x 193 A992/A36 Structural Column	451.65	37.69
		For Hot Dip Galvanizing, Add	*114.18*	
		For High Strength Low Alloy A572-50 Steel, Add	*40.65*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*90.33*	
05 12 23 00-0162	LF	W14 x 176 A992/A36 Structural Column	407.14	36.01
		For Hot Dip Galvanizing, Add	*102.33*	
		For High Strength Low Alloy A572-50 Steel, Add	*36.64*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*81.43*	
05 12 23 00-0163	LF	W14 x 159 A992/A36 Structural Column	368.18	34.76
		For Hot Dip Galvanizing, Add	*91.91*	
		For High Strength Low Alloy A572-50 Steel, Add	*33.14*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*73.64*	
05 12 23 00-0164	LF	W14 x 145 A992/A36 Structural Column	355.81	33.64
		For Hot Dip Galvanizing, Add	*88.78*	
		For High Strength Low Alloy A572-50 Steel, Add	*32.02*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*71.16*	
05 12 23 00-0165	LF	W14 x 132 A992/A36 Structural Column	304.37	32.10
		For Hot Dip Galvanizing, Add	*74.97*	
		For High Strength Low Alloy A572-50 Steel, Add	*27.39*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*60.87*	
05 12 23 00-0166	LF	W14 x 120 A992/A36 Structural Column	285.42	31.27
		For Hot Dip Galvanizing, Add	*69.95*	
		For High Strength Low Alloy A572-50 Steel, Add	*25.69*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*57.08*	
05 12 23 00-0167	LF	W14 x 109 A992/A36 Structural Column	255.61	30.01
		For Hot Dip Galvanizing, Add	*62.06*	
		For High Strength Low Alloy A572-50 Steel, Add	*23.00*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*51.12*	
05 12 23 00-0168	LF	W14 x 99 A992/A36 Structural Column	233.29	29.17
		For Hot Dip Galvanizing, Add	*56.14*	
		For High Strength Low Alloy A572-50 Steel, Add	*21.00*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*46.66*	
05 12 23 00-0169	LF	W14 x 90 A992/A36 Structural Column	216.76	28.47
		For Hot Dip Galvanizing, Add	*51.75*	
		For High Strength Low Alloy A572-50 Steel, Add	*19.51*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*43.35*	
05 12 23 00-0170	LF	W14 x 82 A992/A36 Structural Column	199.71	27.64
		For Hot Dip Galvanizing, Add	*47.25*	
		For High Strength Low Alloy A572-50 Steel, Add	*17.97*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*39.94*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0171	LF	W14 x 74 A992/A36 Structural Column	180.39	26.94
		For Hot Dip Galvanizing, Add	*42.12*	
		For High Strength Low Alloy A572-50 Steel, Add	*16.24*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*36.08*	
05 12 23 00-0172	LF	W14 x 68 A992/A36 Structural Column	168.52	26.52
		For Hot Dip Galvanizing, Add	*38.94*	
		For High Strength Low Alloy A572-50 Steel, Add	*15.17*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*33.70*	
05 12 23 00-0173	LF	W14 x 61 A992/A36 Structural Column	153.71	25.82
		For Hot Dip Galvanizing, Add	*35.03*	
		For High Strength Low Alloy A572-50 Steel, Add	*13.83*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*30.74*	
05 12 23 00-0174	LF	W14 x 53 A992/A36 Structural Column	140.05	25.12
		For Hot Dip Galvanizing, Add	*31.43*	
		For High Strength Low Alloy A572-50 Steel, Add	*12.60*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*28.01*	
05 12 23 00-0175	LF	W14 x 48 A992/A36 Structural Column	131.25	24.71
		For Hot Dip Galvanizing, Add	*29.10*	
		For High Strength Low Alloy A572-50 Steel, Add	*11.81*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*26.25*	
05 12 23 00-0176	LF	W14 x 43 A992/A36 Structural Column	118.48	24.28
		For Hot Dip Galvanizing, Add	*25.71*	
		For High Strength Low Alloy A572-50 Steel, Add	*10.66*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*23.70*	
05 12 23 00-0177	LF	W12 x 336 A992/A36 Structural Column	807.51	36.98
		For Hot Dip Galvanizing, Add	*213.14*	
		For High Strength Low Alloy A572-50 Steel, Add	*72.68*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*161.50*	
05 12 23 00-0178	LF	W12 x 305 A992/A36 Structural Column	735.87	36.25
		For Hot Dip Galvanizing, Add	*193.48*	
		For High Strength Low Alloy A572-50 Steel, Add	*66.23*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*147.17*	
05 12 23 00-0179	LF	W12 x 279 A992/A36 Structural Column	675.96	35.81
		For Hot Dip Galvanizing, Add	*176.99*	
		For High Strength Low Alloy A572-50 Steel, Add	*60.84*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*135.19*	
05 12 23 00-0180	LF	W12 x 252 A992/A36 Structural Column	613.28	34.92
		For Hot Dip Galvanizing, Add	*159.86*	
		For High Strength Low Alloy A572-50 Steel, Add	*55.20*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*122.66*	
05 12 23 00-0181	LF	W12 x 230 A992/A36 Structural Column	562.46	34.41
		For Hot Dip Galvanizing, Add	*145.90*	
		For High Strength Low Alloy A572-50 Steel, Add	*50.62*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*112.49*	
05 12 23 00-0182	LF	W12 x 210 A992/A36 Structural Column	516.22	33.93
		For Hot Dip Galvanizing, Add	*133.21*	
		For High Strength Low Alloy A572-50 Steel, Add	*46.46*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*103.24*	
05 12 23 00-0183	LF	W12 x 190 A992/A36 Structural Column	475.51	38.52
		For Hot Dip Galvanizing, Add	*120.53*	
		For High Strength Low Alloy A572-50 Steel, Add	*42.80*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*95.10*	
05 12 23 00-0184	LF	W12 x 170 A992/A36 Structural Column	429.76	37.41
		For Hot Dip Galvanizing, Add	*108.22*	
		For High Strength Low Alloy A572-50 Steel, Add	*38.68*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*85.95*	
05 12 23 00-0185	LF	W12 x 152 A992/A36 Structural Column	387.43	34.76
		For Hot Dip Galvanizing, Add	*97.25*	
		For High Strength Low Alloy A572-50 Steel, Add	*34.87*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*77.49*	
05 12 23 00-0186	LF	W12 x 136 A992/A36 Structural Column	368.34	33.78
		For Hot Dip Galvanizing, Add	*92.22*	
		For High Strength Low Alloy A572-50 Steel, Add	*33.15*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*73.67*	
05 12 23 00-0187	LF	W12 x 120 A992/A36 Structural Column	278.99	30.99
		For Hot Dip Galvanizing, Add	*68.20*	
		For High Strength Low Alloy A572-50 Steel, Add	*25.11*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*55.80*	
05 12 23 00-0188	LF	W12 x 106 A992/A36 Structural Column	257.14	30.01
		For Hot Dip Galvanizing, Add	*62.49*	
		For High Strength Low Alloy A572-50 Steel, Add	*23.14*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*51.43*	
05 12 23 00-0189	LF	W12 x 96 A992/A36 Structural Column	230.10	29.03
		For Hot Dip Galvanizing, Add	*55.29*	
		For High Strength Low Alloy A572-50 Steel, Add	*20.71*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*46.02*	
05 12 23 00-0190	LF	W12 x 87 A992/A36 Structural Column	212.29	28.05
		For Hot Dip Galvanizing, Add	*50.58*	
		For High Strength Low Alloy A572-50 Steel, Add	*19.11*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*42.46*	
05 12 23 00-0191	LF	W12 x 79 A992/A36 Structural Column	186.33	27.21
		For Hot Dip Galvanizing, Add	*43.65*	
		For High Strength Low Alloy A572-50 Steel, Add	*16.77*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*37.27*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0192	LF	W12 x 72 A992/A36 Structural Column	170.58	26.52
		For Hot Dip Galvanizing, Add	*39.47*	
		For High Strength Low Alloy A572-50 Steel, Add	*15.35*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*34.12*	
05 12 23 00-0193	LF	W12 x 65 A992/A36 Structural Column	155.96	25.97
		For Hot Dip Galvanizing, Add	*35.61*	
		For High Strength Low Alloy A572-50 Steel, Add	*14.04*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*31.19*	
05 12 23 00-0194	LF	W12 x 58 A992/A36 Structural Column	150.91	25.68
		For Hot Dip Galvanizing, Add	*34.29*	
		For High Strength Low Alloy A572-50 Steel, Add	*13.58*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*30.18*	
05 12 23 00-0195	LF	W12 x 53 A992/A36 Structural Column	140.05	25.12
		For Hot Dip Galvanizing, Add	*31.43*	
		For High Strength Low Alloy A572-50 Steel, Add	*12.60*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*28.01*	
05 12 23 00-0196	LF	W12 x 50 A992/A36 Structural Column	135.72	24.99
		For Hot Dip Galvanizing, Add	*30.26*	
		For High Strength Low Alloy A572-50 Steel, Add	*12.21*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*27.14*	
05 12 23 00-0197	LF	W12 x 45 A992/A36 Structural Column	123.34	24.43
		For Hot Dip Galvanizing, Add	*26.98*	
		For High Strength Low Alloy A572-50 Steel, Add	*11.10*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*24.67*	
05 12 23 00-0198	LF	W12 x 40 A992/A36 Structural Column	110.58	23.87
		For Hot Dip Galvanizing, Add	*23.60*	
		For High Strength Low Alloy A572-50 Steel, Add	*9.95*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*22.12*	
05 12 23 00-0199	LF	W10 x 112 A992/A36 Structural Column	268.95	30.57
		For Hot Dip Galvanizing, Add	*65.61*	
		For High Strength Low Alloy A572-50 Steel, Add	*24.21*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*53.79*	
05 12 23 00-0200	LF	W10 x 110 A992/A36 Structural Column	243.29	29.31
		For Hot Dip Galvanizing, Add	*58.84*	
		For High Strength Low Alloy A572-50 Steel, Add	*21.90*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*48.66*	
05 12 23 00-0201	LF	W10 x 88 A992/A36 Structural Column	218.72	28.34
		For Hot Dip Galvanizing, Add	*52.33*	
		For High Strength Low Alloy A572-50 Steel, Add	*19.68*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*43.74*	
05 12 23 00-0202	LF	W10 x 77 A992/A36 Structural Column	194.53	27.21
		For Hot Dip Galvanizing, Add	*45.93*	
		For High Strength Low Alloy A572-50 Steel, Add	*17.51*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*38.91*	
05 12 23 00-0203	LF	W10 x 68 A992/A36 Structural Column	175.19	26.52
		For Hot Dip Galvanizing, Add	*40.79*	
		For High Strength Low Alloy A572-50 Steel, Add	*15.77*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*35.04*	
05 12 23 00-0204	LF	W10 x 60 A992/A36 Structural Column	153.71	25.82
		For Hot Dip Galvanizing, Add	*35.03*	
		For High Strength Low Alloy A572-50 Steel, Add	*13.83*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*30.74*	
05 12 23 00-0205	LF	W10 x 54 A992/A36 Structural Column	152.67	25.40
		For Hot Dip Galvanizing, Add	*34.82*	
		For High Strength Low Alloy A572-50 Steel, Add	*13.74*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*30.53*	
05 12 23 00-0206	LF	W10 x 49 A992/A36 Structural Column	134.05	24.99
		For Hot Dip Galvanizing, Add	*29.84*	
		For High Strength Low Alloy A572-50 Steel, Add	*12.06*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*26.81*	
05 12 23 00-0207	LF	W10 x 45 A992/A36 Structural Column	129.39	24.56
		For Hot Dip Galvanizing, Add	*28.62*	
		For High Strength Low Alloy A572-50 Steel, Add	*11.65*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*25.88*	
05 12 23 00-0208	LF	W10 x 39 A992/A36 Structural Column	112.63	24.15
		For Hot Dip Galvanizing, Add	*24.13*	
		For High Strength Low Alloy A572-50 Steel, Add	*10.14*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*22.53*	
05 12 23 00-0209	LF	W10 x 33 A992/A36 Structural Column	98.21	23.45
		For Hot Dip Galvanizing, Add	*20.32*	
		For High Strength Low Alloy A572-50 Steel, Add	*8.84*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*19.64*	
05 12 23 00-0210	LF	W8 x 67 A992/A36 Structural Column	168.71	26.52
		For Hot Dip Galvanizing, Add	*38.99*	
		For High Strength Low Alloy A572-50 Steel, Add	*15.18*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*33.74*	
05 12 23 00-0211	LF	W8 x 58 A992/A36 Structural Column	151.48	25.68
		For Hot Dip Galvanizing, Add	*34.44*	
		For High Strength Low Alloy A572-50 Steel, Add	*13.63*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*30.30*	
05 12 23 00-0212	LF	W8 x 48 A992/A36 Structural Column	135.58	24.99
		For Hot Dip Galvanizing, Add	*30.26*	
		For High Strength Low Alloy A572-50 Steel, Add	*12.20*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*27.12*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0213	LF	W8 x 40 A992/A36 Structural Column	116.39	24.28
		For Hot Dip Galvanizing, Add	*25.13*	
		For High Strength Low Alloy A572-50 Steel, Add	*10.48*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*23.28*	
05 12 23 00-0214	LF	W8 x 35 A992/A36 Structural Column	105.15	23.73
		For Hot Dip Galvanizing, Add	*22.17*	
		For High Strength Low Alloy A572-50 Steel, Add	*9.46*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*21.03*	
05 12 23 00-0215	LF	W8 x 31 A992/A36 Structural Column	96.11	23.45
		For Hot Dip Galvanizing, Add	*19.74*	
		For High Strength Low Alloy A572-50 Steel, Add	*8.65*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*19.22*	
05 12 23 00-0216	LF	W8 x 28 A992/A36 Structural Column	90.49	23.17
		For Hot Dip Galvanizing, Add	*18.25*	
		For High Strength Low Alloy A572-50 Steel, Add	*8.14*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*18.10*	
05 12 23 00-0217	LF	W8 x 24 A992/A36 Structural Column	83.73	22.89
		For Hot Dip Galvanizing, Add	*16.46*	
		For High Strength Low Alloy A572-50 Steel, Add	*7.54*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*16.75*	
05 12 23 00-0218	LF	W8 x 21 A992/A36 Structural Column	79.25	22.75
		For Hot Dip Galvanizing, Add	*15.29*	
		For High Strength Low Alloy A572-50 Steel, Add	*7.13*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*15.85*	
05 12 23 00-0219	LF	W8 x 18 A992/A36 Structural Column	70.77	22.33
		For Hot Dip Galvanizing, Add	*13.01*	
		For High Strength Low Alloy A572-50 Steel, Add	*6.37*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*14.15*	
05 12 23 00-0220	LF	W6 x 25 A992/A36 Structural Column	87.92	22.89
		For Hot Dip Galvanizing, Add	*17.62*	
		For High Strength Low Alloy A572-50 Steel, Add	*7.91*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*17.58*	
05 12 23 00-0221	LF	W6 x 20 A992/A36 Structural Column	74.35	22.47
		For Hot Dip Galvanizing, Add	*13.97*	
		For High Strength Low Alloy A572-50 Steel, Add	*6.69*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*14.87*	
05 12 23 00-0222	LF	W6 x 15 A992/A36 Structural Column	63.73	21.78
		For Hot Dip Galvanizing, Add	*11.22*	
		For High Strength Low Alloy A572-50 Steel, Add	*5.74*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*12.75*	
05 12 23 00-0223	LF	W6 x 12 A992/A36 Structural Column	59.73	21.78
		For Hot Dip Galvanizing, Add	*10.11*	
		For High Strength Low Alloy A572-50 Steel, Add	*5.38*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*11.95*	
05 12 23 00-0224	LF	W6 x 9 A992/A36 Structural Column	54.63	21.63
		For Hot Dip Galvanizing, Add	*8.73*	
		For High Strength Low Alloy A572-50 Steel, Add	*4.92*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*10.93*	
05 12 23 00-0225	LF	W5 x 19 A992/A36 Structural Column	73.20	22.47
		For Hot Dip Galvanizing, Add	*13.65*	
		For High Strength Low Alloy A572-50 Steel, Add	*6.59*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*14.64*	
05 12 23 00-0226	LF	W5 x 16 A992/A36 Structural Column	67.39	22.33
		For Hot Dip Galvanizing, Add	*12.12*	
		For High Strength Low Alloy A572-50 Steel, Add	*6.07*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*13.48*	
05 12 23 00-0227	LF	W4 x 13 A992/A36 Structural Column	63.11	22.06
		For Hot Dip Galvanizing, Add	*11.01*	
		For High Strength Low Alloy A572-50 Steel, Add	*5.68*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*12.62*	

05 12 23 00-0228 A992/A36 Structural Steel Beams And Girders, W Shapes *(05 12 23 00-0147)*

Note: Includes material delivery and erection.

05 12 23 00-0229	LF	W36 x 300 A992/A36 Structural Beam Or Girder	638.36	90.95
		For Hot Dip Galvanizing, Add	*150.22*	
		For High Strength Low Alloy A572-50 Steel, Add	*57.45*	
		For High Strength Low Alloy A588 Steel, Add	*127.67*	
		For Each Additional Top Copes >2, Add	*5.41*	
		For Structural Tees, WT, MT Or ST, Deduct	*-208.87*	
		For Skewed Or Sloped Connections, Add	*76.60*	
05 12 23 00-0230	LF	W36 x 280 A992/A36 Structural Beam Or Girder	616.92	104.68
		For Hot Dip Galvanizing, Add	*140.21*	
		For High Strength Low Alloy A572-50 Steel, Add	*55.52*	
		For High Strength Low Alloy A588 Steel, Add	*123.38*	
		For Each Additional Top Copes >2, Add	*5.05*	
		For Structural Tees, WT, MT Or ST, Deduct	*-199.17*	
		For Skewed Or Sloped Connections, Add	*74.03*	
05 12 23 00-0231	LF	W36 x 260 A992/A36 Structural Beam Or Girder	584.11	103.43
		For Hot Dip Galvanizing, Add	*131.49*	
		For High Strength Low Alloy A572-50 Steel, Add	*52.57*	
		For High Strength Low Alloy A588 Steel, Add	*116.82*	
		For Each Additional Top Copes >2, Add	*4.74*	
		For Structural Tees, WT, MT Or ST, Deduct	*-187.90*	
		For Skewed Or Sloped Connections, Add	*70.09*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0232	LF	W36 x 240 A992/A36 Structural Beam Or Girder	543.50	87.66
		For Hot Dip Galvanizing, Add	*124.88*	
		For High Strength Low Alloy A572-50 Steel, Add	*48.92*	
		For High Strength Low Alloy A588 Steel, Add	*108.70*	
		For Each Additional Top Copes >2, Add	*4.50*	
		For Structural Tees, WT, MT Or ST, Deduct	*-176.20*	
		For Skewed Or Sloped Connections, Add	*65.22*	
05 12 23 00-0233	LF	W36 x 230 A992/A36 Structural Beam Or Girder	526.07	88.90
		For Hot Dip Galvanizing, Add	*119.67*	
		For High Strength Low Alloy A572-50 Steel, Add	*47.35*	
		For High Strength Low Alloy A588 Steel, Add	*105.21*	
		For Each Additional Top Copes >2, Add	*4.31*	
		For Structural Tees, WT, MT Or ST, Deduct	*-169.90*	
		For Skewed Or Sloped Connections, Add	*63.13*	
05 12 23 00-0234	LF	W36 x 210 A992/A36 Structural Beam Or Girder	500.52	100.08
		For Hot Dip Galvanizing, Add	*109.27*	
		For High Strength Low Alloy A572-50 Steel, Add	*45.05*	
		For High Strength Low Alloy A588 Steel, Add	*100.10*	
		For Each Additional Top Copes >2, Add	*3.94*	
		For Structural Tees, WT, MT Or ST, Deduct	*-159.17*	
		For Skewed Or Sloped Connections, Add	*60.06*	
05 12 23 00-0235	LF	W36 x 194 A992/A36 Structural Beam Or Girder	470.99	85.02
		For Hot Dip Galvanizing, Add	*105.53*	
		For High Strength Low Alloy A572-50 Steel, Add	*42.39*	
		For High Strength Low Alloy A588 Steel, Add	*94.20*	
		For Each Additional Top Copes >2, Add	*3.80*	
		For Structural Tees, WT, MT Or ST, Deduct	*-151.24*	
		For Skewed Or Sloped Connections, Add	*56.52*	
05 12 23 00-0236	LF	W36 x 182 A992/A36 Structural Beam Or Girder	446.81	84.40
		For Hot Dip Galvanizing, Add	*99.01*	
		For High Strength Low Alloy A572-50 Steel, Add	*40.21*	
		For High Strength Low Alloy A588 Steel, Add	*89.36*	
		For Each Additional Top Copes >2, Add	*3.57*	
		For Structural Tees, WT, MT Or ST, Deduct	*-142.88*	
		For Skewed Or Sloped Connections, Add	*53.62*	
05 12 23 00-0237	LF	W36 x 170 A992/A36 Structural Beam Or Girder	422.25	83.43
		For Hot Dip Galvanizing, Add	*92.48*	
		For High Strength Low Alloy A572-50 Steel, Add	*38.00*	
		For High Strength Low Alloy A588 Steel, Add	*84.45*	
		For Each Additional Top Copes >2, Add	*3.33*	
		For Structural Tees, WT, MT Or ST, Deduct	*-134.44*	
		For Skewed Or Sloped Connections, Add	*50.67*	
05 12 23 00-0238	LF	W36 x 160 A992/A36 Structural Beam Or Girder	416.94	96.87
		For Hot Dip Galvanizing, Add	*87.04*	
		For High Strength Low Alloy A572-50 Steel, Add	*37.52*	
		For High Strength Low Alloy A588 Steel, Add	*83.39*	
		For Each Additional Top Copes >2, Add	*3.14*	
		For Structural Tees, WT, MT Or ST, Deduct	*-130.44*	
		For Skewed Or Sloped Connections, Add	*50.03*	
05 12 23 00-0239	LF	W36 x 150 A992/A36 Structural Beam Or Girder	399.81	96.17
		For Hot Dip Galvanizing, Add	*82.48*	
		For High Strength Low Alloy A572-50 Steel, Add	*35.98*	
		For High Strength Low Alloy A588 Steel, Add	*79.96*	
		For Each Additional Top Copes >2, Add	*2.97*	
		For Structural Tees, WT, MT Or ST, Deduct	*-124.54*	
		For Skewed Or Sloped Connections, Add	*47.98*	
05 12 23 00-0240	LF	W36 x 135 A992/A36 Structural Beam Or Girder	375.85	95.33
		For Hot Dip Galvanizing, Add	*76.10*	
		For High Strength Low Alloy A572-50 Steel, Add	*33.83*	
		For High Strength Low Alloy A588 Steel, Add	*75.17*	
		For Each Additional Top Copes >2, Add	*2.74*	
		For Structural Tees, WT, MT Or ST, Deduct	*-116.31*	
		For Skewed Or Sloped Connections, Add	*45.10*	
05 12 23 00-0241	LF	W33 x 241 A992/A36 Structural Beam Or Girder	550.35	90.41
		For Hot Dip Galvanizing, Add	*125.96*	
		For High Strength Low Alloy A572-50 Steel, Add	*49.53*	
		For High Strength Low Alloy A588 Steel, Add	*110.07*	
		For Each Additional Top Copes >2, Add	*4.54*	
		For Structural Tees, WT, MT Or ST, Deduct	*-178.16*	
		For Skewed Or Sloped Connections, Add	*66.04*	
05 12 23 00-0242	LF	W33 x 221 A992/A36 Structural Beam Or Girder	510.31	88.19
		For Hot Dip Galvanizing, Add	*115.51*	
		For High Strength Low Alloy A572-50 Steel, Add	*45.93*	
		For High Strength Low Alloy A588 Steel, Add	*102.06*	
		For Each Additional Top Copes >2, Add	*4.16*	
		For Structural Tees, WT, MT Or ST, Deduct	*-164.50*	
		For Skewed Or Sloped Connections, Add	*61.24*	
05 12 23 00-0243	LF	W33 x 201 A992/A36 Structural Beam Or Girder	484.66	99.38
		For Hot Dip Galvanizing, Add	*105.06*	
		For High Strength Low Alloy A572-50 Steel, Add	*43.62*	
		For High Strength Low Alloy A588 Steel, Add	*96.93*	
		For Each Additional Top Copes >2, Add	*3.79*	
		For Structural Tees, WT, MT Or ST, Deduct	*-153.72*	
		For Skewed Or Sloped Connections, Add	*58.16*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0244	LF	W33 x 170 A992/A36 Structural Beam Or Girder	435.35	97.56
		For Hot Dip Galvanizing, Add	*91.95*	
		For High Strength Low Alloy A572-50 Steel, Add	*39.18*	
		For High Strength Low Alloy A588 Steel, Add	*87.07*	
		For Each Additional Top Copes >2, Add	*3.31*	
		For Structural Tees, WT, MT Or ST, Deduct	*-136.77*	
		For Skewed Or Sloped Connections, Add	*52.24*	
05 12 23 00-0245	LF	W33 x 152 A992/A36 Structural Beam Or Girder	395.02	83.17
		For Hot Dip Galvanizing, Add	*85.00*	
		For High Strength Low Alloy A572-50 Steel, Add	*35.55*	
		For High Strength Low Alloy A588 Steel, Add	*79.00*	
		For Each Additional Top Copes >2, Add	*3.06*	
		For Structural Tees, WT, MT Or ST, Deduct	*-124.95*	
		For Skewed Or Sloped Connections, Add	*47.40*	
05 12 23 00-0246	LF	W33 x 141 A992/A36 Structural Beam Or Girder	386.17	95.61
		For Hot Dip Galvanizing, Add	*78.85*	
		For High Strength Low Alloy A572-50 Steel, Add	*34.76*	
		For High Strength Low Alloy A588 Steel, Add	*77.23*	
		For Each Additional Top Copes >2, Add	*2.84*	
		For Structural Tees, WT, MT Or ST, Deduct	*-119.86*	
		For Skewed Or Sloped Connections, Add	*46.34*	
05 12 23 00-0247	LF	W33 x 130 A992/A36 Structural Beam Or Girder	366.78	94.91
		For Hot Dip Galvanizing, Add	*73.70*	
		For High Strength Low Alloy A572-50 Steel, Add	*33.01*	
		For High Strength Low Alloy A588 Steel, Add	*73.36*	
		For Each Additional Top Copes >2, Add	*2.66*	
		For Structural Tees, WT, MT Or ST, Deduct	*-113.19*	
		For Skewed Or Sloped Connections, Add	*44.01*	
05 12 23 00-0248	LF	W33 x 118 A992/A36 Structural Beam Or Girder	344.24	94.07
		For Hot Dip Galvanizing, Add	*67.68*	
		For High Strength Low Alloy A572-50 Steel, Add	*30.98*	
		For High Strength Low Alloy A588 Steel, Add	*68.85*	
		For Each Additional Top Copes >2, Add	*2.44*	
		For Structural Tees, WT, MT Or ST, Deduct	*-105.43*	
		For Skewed Or Sloped Connections, Add	*41.31*	
05 12 23 00-0249	LF	W30 x 211 A992/A36 Structural Beam Or Girder	489.29	88.03
		For Hot Dip Galvanizing, Add	*109.72*	
		For High Strength Low Alloy A572-50 Steel, Add	*44.04*	
		For High Strength Low Alloy A588 Steel, Add	*97.86*	
		For Each Additional Top Copes >2, Add	*3.95*	
		For Structural Tees, WT, MT Or ST, Deduct	*-157.17*	
		For Skewed Or Sloped Connections, Add	*58.71*	
05 12 23 00-0250	LF	W30 x 191 A992/A36 Structural Beam Or Girder	463.30	98.68
		For Hot Dip Galvanizing, Add	*99.32*	
		For High Strength Low Alloy A572-50 Steel, Add	*41.70*	
		For High Strength Low Alloy A588 Steel, Add	*92.66*	
		For Each Additional Top Copes >2, Add	*3.58*	
		For Structural Tees, WT, MT Or ST, Deduct	*-146.35*	
		For Skewed Or Sloped Connections, Add	*55.60*	
05 12 23 00-0251	LF	W30 x 173 A992/A36 Structural Beam Or Girder	423.73	84.01
		For Hot Dip Galvanizing, Add	*92.72*	
		For High Strength Low Alloy A572-50 Steel, Add	*38.14*	
		For High Strength Low Alloy A588 Steel, Add	*84.75*	
		For Each Additional Top Copes >2, Add	*3.34*	
		For Structural Tees, WT, MT Or ST, Deduct	*-134.86*	
		For Skewed Or Sloped Connections, Add	*50.85*	
05 12 23 00-0252	LF	W30 x 154 A992/A36 Structural Beam Or Girder	400.15	96.31
		For Hot Dip Galvanizing, Add	*82.53*	
		For High Strength Low Alloy A572-50 Steel, Add	*36.01*	
		For High Strength Low Alloy A588 Steel, Add	*80.03*	
		For Each Additional Top Copes >2, Add	*2.97*	
		For Structural Tees, WT, MT Or ST, Deduct	*-124.64*	
		For Skewed Or Sloped Connections, Add	*48.02*	
05 12 23 00-0253	LF	W30 x 132 A992/A36 Structural Beam Or Girder	356.07	81.05
		For Hot Dip Galvanizing, Add	*74.82*	
		For High Strength Low Alloy A572-50 Steel, Add	*32.05*	
		For High Strength Low Alloy A588 Steel, Add	*71.21*	
		For Each Additional Top Copes >2, Add	*2.70*	
		For Structural Tees, WT, MT Or ST, Deduct	*-111.66*	
		For Skewed Or Sloped Connections, Add	*42.73*	
05 12 23 00-0254	LF	W30 x 124 A992/A36 Structural Beam Or Girder	339.68	81.00
		For Hot Dip Galvanizing, Add	*70.28*	
		For High Strength Low Alloy A572-50 Steel, Add	*30.57*	
		For High Strength Low Alloy A588 Steel, Add	*67.94*	
		For Each Additional Top Copes >2, Add	*2.53*	
		For Structural Tees, WT, MT Or ST, Deduct	*-105.93*	
		For Skewed Or Sloped Connections, Add	*40.76*	
05 12 23 00-0255	LF	W30 x 116 A992/A36 Structural Beam Or Girder	337.14	93.94
		For Hot Dip Galvanizing, Add	*65.75*	
		For High Strength Low Alloy A572-50 Steel, Add	*30.34*	
		For High Strength Low Alloy A588 Steel, Add	*67.43*	
		For Each Additional Top Copes >2, Add	*2.37*	
		For Structural Tees, WT, MT Or ST, Deduct	*-102.97*	
		For Skewed Or Sloped Connections, Add	*40.46*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0256	LF	W30 x 108 A992/A36 Structural Beam Or Girder	311.91	84.58
		For Hot Dip Galvanizing, Add	*61.54*	
		For High Strength Low Alloy A572-50 Steel, Add	*28.07*	
		For High Strength Low Alloy A588 Steel, Add	*62.38*	
		For Each Additional Top Copes >2, Add	*2.22*	
		For Structural Tees, WT, MT Or ST, Deduct	*-95.64*	
		For Skewed Or Sloped Connections, Add	*37.43*	
05 12 23 00-0257	LF	W30 x 99 A992/A36 Structural Beam Or Girder	298.08	84.16
		For Hot Dip Galvanizing, Add	*57.85*	
		For High Strength Low Alloy A572-50 Steel, Add	*26.83*	
		For High Strength Low Alloy A588 Steel, Add	*59.62*	
		For Each Additional Top Copes >2, Add	*2.08*	
		For Structural Tees, WT, MT Or ST, Deduct	*-90.89*	
		For Skewed Or Sloped Connections, Add	*35.77*	
05 12 23 00-0258	LF	W27 x 178 A992/A36 Structural Beam Or Girder	470.94	98.36
		For Hot Dip Galvanizing, Add	*101.57*	
		For High Strength Low Alloy A572-50 Steel, Add	*42.38*	
		For High Strength Low Alloy A588 Steel, Add	*94.19*	
		For Each Additional Top Copes >2, Add	*3.66*	
		For Structural Tees, WT, MT Or ST, Deduct	*-149.09*	
		For Skewed Or Sloped Connections, Add	*56.51*	
05 12 23 00-0259	LF	W27 x 161 A992/A36 Structural Beam Or Girder	432.01	94.65
		For Hot Dip Galvanizing, Add	*91.87*	
		For High Strength Low Alloy A572-50 Steel, Add	*38.88*	
		For High Strength Low Alloy A588 Steel, Add	*86.40*	
		For Each Additional Top Copes >2, Add	*3.31*	
		For Structural Tees, WT, MT Or ST, Deduct	*-136.06*	
		For Skewed Or Sloped Connections, Add	*51.84*	
05 12 23 00-0260	LF	W27 x 146 A992/A36 Structural Beam Or Girder	397.60	91.30
		For Hot Dip Galvanizing, Add	*83.31*	
		For High Strength Low Alloy A572-50 Steel, Add	*35.78*	
		For High Strength Low Alloy A588 Steel, Add	*79.52*	
		For Each Additional Top Copes >2, Add	*3.00*	
		For Structural Tees, WT, MT Or ST, Deduct	*-124.55*	
		For Skewed Or Sloped Connections, Add	*47.71*	
05 12 23 00-0261	LF	W27 x 114 A992/A36 Structural Beam Or Girder	315.31	75.85
		For Hot Dip Galvanizing, Add	*65.05*	
		For High Strength Low Alloy A572-50 Steel, Add	*28.38*	
		For High Strength Low Alloy A588 Steel, Add	*63.06*	
		For Each Additional Top Copes >2, Add	*2.34*	
		For Structural Tees, WT, MT Or ST, Deduct	*-98.22*	
		For Skewed Or Sloped Connections, Add	*37.84*	
05 12 23 00-0262	LF	W27 x 102 A992/A36 Structural Beam Or Girder	299.47	84.16
		For Hot Dip Galvanizing, Add	*58.20*	
		For High Strength Low Alloy A572-50 Steel, Add	*26.95*	
		For High Strength Low Alloy A588 Steel, Add	*59.89*	
		For Each Additional Top Copes >2, Add	*2.10*	
		For Structural Tees, WT, MT Or ST, Deduct	*-91.35*	
		For Skewed Or Sloped Connections, Add	*35.94*	
05 12 23 00-0263	LF	W27 x 94 A992/A36 Structural Beam Or Girder	286.48	83.60
		For Hot Dip Galvanizing, Add	*54.75*	
		For High Strength Low Alloy A572-50 Steel, Add	*25.78*	
		For High Strength Low Alloy A588 Steel, Add	*57.30*	
		For Each Additional Top Copes >2, Add	*1.97*	
		For Structural Tees, WT, MT Or ST, Deduct	*-86.89*	
		For Skewed Or Sloped Connections, Add	*34.38*	
05 12 23 00-0264	LF	W27 x 84 A992/A36 Structural Beam Or Girder	270.61	83.05
		For Hot Dip Galvanizing, Add	*50.54*	
		For High Strength Low Alloy A572-50 Steel, Add	*24.35*	
		For High Strength Low Alloy A588 Steel, Add	*54.12*	
		For Each Additional Top Copes >2, Add	*1.82*	
		For Structural Tees, WT, MT Or ST, Deduct	*-81.44*	
		For Skewed Or Sloped Connections, Add	*32.47*	
05 12 23 00-0265	LF	W24 x 162 A992/A36 Structural Beam Or Girder	416.11	90.75
		For Hot Dip Galvanizing, Add	*88.61*	
		For High Strength Low Alloy A572-50 Steel, Add	*37.45*	
		For High Strength Low Alloy A588 Steel, Add	*83.22*	
		For Each Additional Top Copes >2, Add	*3.19*	
		For Structural Tees, WT, MT Or ST, Deduct	*-131.12*	
		For Skewed Or Sloped Connections, Add	*49.93*	
05 12 23 00-0266	LF	W24 x 146 A992/A36 Structural Beam Or Girder	380.58	86.99
		For Hot Dip Galvanizing, Add	*79.86*	
		For High Strength Low Alloy A572-50 Steel, Add	*34.25*	
		For High Strength Low Alloy A588 Steel, Add	*76.12*	
		For Each Additional Top Copes >2, Add	*2.88*	
		For Structural Tees, WT, MT Or ST, Deduct	*-119.28*	
		For Skewed Or Sloped Connections, Add	*45.67*	
05 12 23 00-0267	LF	W24 x 131 A992/A36 Structural Beam Or Girder	346.79	83.05
		For Hot Dip Galvanizing, Add	*71.65*	
		For High Strength Low Alloy A572-50 Steel, Add	*31.21*	
		For High Strength Low Alloy A588 Steel, Add	*69.36*	
		For Each Additional Top Copes >2, Add	*2.58*	
		For Structural Tees, WT, MT Or ST, Deduct	*-108.09*	
		For Skewed Or Sloped Connections, Add	*41.61*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0268	LF	W24 x 117 A992/A36 Structural Beam Or Girder	314.78	78.90
		For Hot Dip Galvanizing, Add	*64.00*	
		For High Strength Low Alloy A572-50 Steel, Add	*28.33*	
		For High Strength Low Alloy A588 Steel, Add	*62.96*	
		For Each Additional Top Copes >2, Add	*2.31*	
		For Structural Tees, WT, MT Or ST, Deduct	*-97.55*	
		For Skewed Or Sloped Connections, Add	*37.77*	
05 12 23 00-0269	LF	W24 x 104 A992/A36 Structural Beam Or Girder	284.57	74.61
		For Hot Dip Galvanizing, Add	*56.88*	
		For High Strength Low Alloy A572-50 Steel, Add	*25.61*	
		For High Strength Low Alloy A588 Steel, Add	*56.91*	
		For Each Additional Top Copes >2, Add	*2.05*	
		For Structural Tees, WT, MT Or ST, Deduct	*-87.66*	
		For Skewed Or Sloped Connections, Add	*34.15*	
05 12 23 00-0270	LF	W24 x 94 A992/A36 Structural Beam Or Girder	274.46	83.60
		For Hot Dip Galvanizing, Add	*51.42*	
		For High Strength Low Alloy A572-50 Steel, Add	*24.70*	
		For High Strength Low Alloy A588 Steel, Add	*54.89*	
		For Each Additional Top Copes >2, Add	*1.85*	
		For Structural Tees, WT, MT Or ST, Deduct	*-82.68*	
		For Skewed Or Sloped Connections, Add	*32.94*	
05 12 23 00-0271	LF	W24 x 84 A992/A36 Structural Beam Or Girder	250.31	74.11
		For Hot Dip Galvanizing, Add	*47.50*	
		For High Strength Low Alloy A572-50 Steel, Add	*22.53*	
		For High Strength Low Alloy A588 Steel, Add	*50.06*	
		For Each Additional Top Copes >2, Add	*1.71*	
		For Structural Tees, WT, MT Or ST, Deduct	*-75.74*	
		For Skewed Or Sloped Connections, Add	*30.04*	
05 12 23 00-0272	LF	W24 x 76 A992/A36 Structural Beam Or Girder	238.15	73.55
		For Hot Dip Galvanizing, Add	*44.28*	
		For High Strength Low Alloy A572-50 Steel, Add	*21.43*	
		For High Strength Low Alloy A588 Steel, Add	*47.63*	
		For Each Additional Top Copes >2, Add	*1.60*	
		For Structural Tees, WT, MT Or ST, Deduct	*-71.57*	
		For Skewed Or Sloped Connections, Add	*28.58*	
05 12 23 00-0273	LF	W24 x 68 A992/A36 Structural Beam Or Girder	222.83	73.14
		For Hot Dip Galvanizing, Add	*40.18*	
		For High Strength Low Alloy A572-50 Steel, Add	*20.05*	
		For High Strength Low Alloy A588 Steel, Add	*44.57*	
		For Each Additional Top Copes >2, Add	*1.45*	
		For Structural Tees, WT, MT Or ST, Deduct	*-66.29*	
		For Skewed Or Sloped Connections, Add	*26.74*	
05 12 23 00-0274	LF	W24 x 62 A992/A36 Structural Beam Or Girder	214.83	72.72
		For Hot Dip Galvanizing, Add	*38.08*	
		For High Strength Low Alloy A572-50 Steel, Add	*19.33*	
		For High Strength Low Alloy A588 Steel, Add	*42.97*	
		For Each Additional Top Copes >2, Add	*1.37*	
		For Structural Tees, WT, MT Or ST, Deduct	*-63.55*	
		For Skewed Or Sloped Connections, Add	*25.78*	
05 12 23 00-0275	LF	W24 x 55 A992/A36 Structural Beam Or Girder	203.87	72.44
		For Hot Dip Galvanizing, Add	*35.15*	
		For High Strength Low Alloy A572-50 Steel, Add	*18.35*	
		For High Strength Low Alloy A588 Steel, Add	*40.77*	
		For Each Additional Top Copes >2, Add	*1.27*	
		For Structural Tees, WT, MT Or ST, Deduct	*-59.78*	
		For Skewed Or Sloped Connections, Add	*24.46*	
05 12 23 00-0276	LF	W21 x 147 A992/A36 Structural Beam Or Girder	364.15	74.62
		For Hot Dip Galvanizing, Add	*78.96*	
		For High Strength Low Alloy A572-50 Steel, Add	*32.77*	
		For High Strength Low Alloy A588 Steel, Add	*72.83*	
		For Each Additional Top Copes >2, Add	*2.85*	
		For Structural Tees, WT, MT Or ST, Deduct	*-115.51*	
		For Skewed Or Sloped Connections, Add	*43.70*	
05 12 23 00-0277	LF	W21 x 132 A992/A36 Structural Beam Or Girder	331.55	71.30
		For Hot Dip Galvanizing, Add	*70.90*	
		For High Strength Low Alloy A572-50 Steel, Add	*29.84*	
		For High Strength Low Alloy A588 Steel, Add	*66.31*	
		For Each Additional Top Copes >2, Add	*2.56*	
		For Structural Tees, WT, MT Or ST, Deduct	*-104.64*	
		For Skewed Or Sloped Connections, Add	*39.79*	
05 12 23 00-0278	LF	W21 x 122 A992/A36 Structural Beam Or Girder	310.92	70.10
		For Hot Dip Galvanizing, Add	*65.53*	
		For High Strength Low Alloy A572-50 Steel, Add	*27.98*	
		For High Strength Low Alloy A588 Steel, Add	*62.18*	
		For Each Additional Top Copes >2, Add	*2.36*	
		For Structural Tees, WT, MT Or ST, Deduct	*-97.61*	
		For Skewed Or Sloped Connections, Add	*37.31*	
05 12 23 00-0279	LF	W21 x 111 A992/A36 Structural Beam Or Girder	287.23	67.85
		For Hot Dip Galvanizing, Add	*59.62*	
		For High Strength Low Alloy A572-50 Steel, Add	*25.85*	
		For High Strength Low Alloy A588 Steel, Add	*57.45*	
		For Each Additional Top Copes >2, Add	*2.15*	
		For Structural Tees, WT, MT Or ST, Deduct	*-89.67*	
		For Skewed Or Sloped Connections, Add	*34.47*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0280	LF	W21 x 101 A992/A36 Structural Beam Or Girder	265.55	65.68
		For Hot Dip Galvanizing, Add	*54.25*	
		For High Strength Low Alloy A572-50 Steel, Add	*23.90*	
		For High Strength Low Alloy A588 Steel, Add	*53.11*	
		For Each Additional Top Copes >2, Add	*1.96*	
		For Structural Tees, WT, MT Or ST, Deduct	*-82.44*	
		For Skewed Or Sloped Connections, Add	*31.87*	
05 12 23 00-0281	LF	W21 x 93 A992/A36 Structural Beam Or Girder	259.98	74.96
		For Hot Dip Galvanizing, Add	*49.95*	
		For High Strength Low Alloy A572-50 Steel, Add	*23.40*	
		For High Strength Low Alloy A588 Steel, Add	*52.00*	
		For Each Additional Top Copes >2, Add	*1.80*	
		For Structural Tees, WT, MT Or ST, Deduct	*-79.00*	
		For Skewed Or Sloped Connections, Add	*31.20*	
05 12 23 00-0282	LF	W21 x 83 A992/A36 Structural Beam Or Girder	245.67	74.11
		For Hot Dip Galvanizing, Add	*46.21*	
		For High Strength Low Alloy A572-50 Steel, Add	*22.11*	
		For High Strength Low Alloy A588 Steel, Add	*49.13*	
		For Each Additional Top Copes >2, Add	*1.67*	
		For Structural Tees, WT, MT Or ST, Deduct	*-74.11*	
		For Skewed Or Sloped Connections, Add	*29.48*	
05 12 23 00-0283	LF	W21 x 73 A992/A36 Structural Beam Or Girder	228.10	73.55
		For Hot Dip Galvanizing, Add	*41.53*	
		For High Strength Low Alloy A572-50 Steel, Add	*20.53*	
		For High Strength Low Alloy A588 Steel, Add	*45.62*	
		For Each Additional Top Copes >2, Add	*1.50*	
		For Structural Tees, WT, MT Or ST, Deduct	*-68.07*	
		For Skewed Or Sloped Connections, Add	*27.37*	
05 12 23 00-0284	LF	W21 x 68 A992/A36 Structural Beam Or Girder	219.25	73.14
		For Hot Dip Galvanizing, Add	*39.19*	
		For High Strength Low Alloy A572-50 Steel, Add	*19.73*	
		For High Strength Low Alloy A588 Steel, Add	*43.85*	
		For Each Additional Top Copes >2, Add	*1.41*	
		For Structural Tees, WT, MT Or ST, Deduct	*-65.03*	
		For Skewed Or Sloped Connections, Add	*26.31*	
05 12 23 00-0285	LF	W21 x 62 A992/A36 Structural Beam Or Girder	211.25	72.72
		For Hot Dip Galvanizing, Add	*37.09*	
		For High Strength Low Alloy A572-50 Steel, Add	*19.01*	
		For High Strength Low Alloy A588 Steel, Add	*42.25*	
		For Each Additional Top Copes >2, Add	*1.34*	
		For Structural Tees, WT, MT Or ST, Deduct	*-62.30*	
		For Skewed Or Sloped Connections, Add	*25.35*	
05 12 23 00-0286	LF	W21 x 57 A992/A36 Structural Beam Or Girder	204.01	72.58
		For Hot Dip Galvanizing, Add	*35.15*	
		For High Strength Low Alloy A572-50 Steel, Add	*18.36*	
		For High Strength Low Alloy A588 Steel, Add	*40.80*	
		For Each Additional Top Copes >2, Add	*1.27*	
		For Structural Tees, WT, MT Or ST, Deduct	*-59.80*	
		For Skewed Or Sloped Connections, Add	*24.48*	
05 12 23 00-0287	LF	W21 x 50 A992/A36 Structural Beam Or Girder	180.88	62.95
		For Hot Dip Galvanizing, Add	*31.53*	
		For High Strength Low Alloy A572-50 Steel, Add	*16.28*	
		For High Strength Low Alloy A588 Steel, Add	*36.18*	
		For Each Additional Top Copes >2, Add	*1.14*	
		For Structural Tees, WT, MT Or ST, Deduct	*-53.22*	
		For Skewed Or Sloped Connections, Add	*21.71*	
05 12 23 00-0288	LF	W21 x 44 A992/A36 Structural Beam Or Girder	172.46	62.67
		For Hot Dip Galvanizing, Add	*29.30*	
		For High Strength Low Alloy A572-50 Steel, Add	*15.52*	
		For High Strength Low Alloy A588 Steel, Add	*34.49*	
		For Each Additional Top Copes >2, Add	*1.06*	
		For Structural Tees, WT, MT Or ST, Deduct	*-50.33*	
		For Skewed Or Sloped Connections, Add	*20.70*	
05 12 23 00-0289	LF	W18 x 119 A992/A36 Structural Beam Or Girder	302.34	69.86
		For Hot Dip Galvanizing, Add	*63.22*	
		For High Strength Low Alloy A572-50 Steel, Add	*27.21*	
		For High Strength Low Alloy A588 Steel, Add	*60.47*	
		For Each Additional Top Copes >2, Add	*2.28*	
		For Structural Tees, WT, MT Or ST, Deduct	*-94.64*	
		For Skewed Or Sloped Connections, Add	*36.28*	
05 12 23 00-0290	LF	W18 x 106 A992/A36 Structural Beam Or Girder	273.54	66.20
		For Hot Dip Galvanizing, Add	*56.31*	
		For High Strength Low Alloy A572-50 Steel, Add	*24.62*	
		For High Strength Low Alloy A588 Steel, Add	*54.71*	
		For Each Additional Top Copes >2, Add	*2.03*	
		For Structural Tees, WT, MT Or ST, Deduct	*-85.15*	
		For Skewed Or Sloped Connections, Add	*32.82*	
05 12 23 00-0291	LF	W18 x 97 A992/A36 Structural Beam Or Girder	265.82	74.96
		For Hot Dip Galvanizing, Add	*51.53*	
		For High Strength Low Alloy A572-50 Steel, Add	*23.92*	
		For High Strength Low Alloy A588 Steel, Add	*53.16*	
		For Each Additional Top Copes >2, Add	*1.86*	
		For Structural Tees, WT, MT Or ST, Deduct	*-81.02*	
		For Skewed Or Sloped Connections, Add	*31.90*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0292	LF	W18 x 86 A992/A36 Structural Beam Or Girder	249.39	74.26
		For Hot Dip Galvanizing, Add	*47.21*	
		For High Strength Low Alloy A572-50 Steel, Add	*22.45*	
		For High Strength Low Alloy A588 Steel, Add	*49.88*	
		For Each Additional Top Copes >2, Add	*1.70*	
		For Structural Tees, WT, MT Or ST, Deduct	*-75.39*	
		For Skewed Or Sloped Connections, Add	*29.93*	
05 12 23 00-0293	LF	W18 x 76 A992/A36 Structural Beam Or Girder	234.56	73.55
		For Hot Dip Galvanizing, Add	*43.28*	
		For High Strength Low Alloy A572-50 Steel, Add	*21.11*	
		For High Strength Low Alloy A588 Steel, Add	*46.91*	
		For Each Additional Top Copes >2, Add	*1.56*	
		For Structural Tees, WT, MT Or ST, Deduct	*-70.31*	
		For Skewed Or Sloped Connections, Add	*28.15*	
05 12 23 00-0294	LF	W18 x 71 A992/A36 Structural Beam Or Girder	223.74	73.42
		For Hot Dip Galvanizing, Add	*40.36*	
		For High Strength Low Alloy A572-50 Steel, Add	*20.14*	
		For High Strength Low Alloy A588 Steel, Add	*44.75*	
		For Each Additional Top Copes >2, Add	*1.45*	
		For Structural Tees, WT, MT Or ST, Deduct	*-66.56*	
		For Skewed Or Sloped Connections, Add	*26.85*	
05 12 23 00-0295	LF	W18 x 65 A992/A36 Structural Beam Or Girder	213.22	73.14
		For Hot Dip Galvanizing, Add	*37.55*	
		For High Strength Low Alloy A572-50 Steel, Add	*19.19*	
		For High Strength Low Alloy A588 Steel, Add	*42.64*	
		For Each Additional Top Copes >2, Add	*1.35*	
		For Structural Tees, WT, MT Or ST, Deduct	*-62.94*	
		For Skewed Or Sloped Connections, Add	*25.59*	
05 12 23 00-0296	LF	W18 x 60 A992/A36 Structural Beam Or Girder	203.72	72.58
		For Hot Dip Galvanizing, Add	*35.04*	
		For High Strength Low Alloy A572-50 Steel, Add	*18.33*	
		For High Strength Low Alloy A588 Steel, Add	*40.74*	
		For Each Additional Top Copes >2, Add	*1.26*	
		For Structural Tees, WT, MT Or ST, Deduct	*-59.68*	
		For Skewed Or Sloped Connections, Add	*24.45*	
05 12 23 00-0297	LF	W18 x 55 A992/A36 Structural Beam Or Girder	194.18	72.44
		For Hot Dip Galvanizing, Add	*32.46*	
		For High Strength Low Alloy A572-50 Steel, Add	*17.48*	
		For High Strength Low Alloy A588 Steel, Add	*38.84*	
		For Each Additional Top Copes >2, Add	*1.17*	
		For Structural Tees, WT, MT Or ST, Deduct	*-56.38*	
		For Skewed Or Sloped Connections, Add	*23.30*	
05 12 23 00-0298	LF	W18 x 50 A992/A36 Structural Beam Or Girder	174.98	62.95
		For Hot Dip Galvanizing, Add	*29.89*	
		For High Strength Low Alloy A572-50 Steel, Add	*15.75*	
		For High Strength Low Alloy A588 Steel, Add	*35.00*	
		For Each Additional Top Copes >2, Add	*1.08*	
		For Structural Tees, WT, MT Or ST, Deduct	*-51.15*	
		For Skewed Or Sloped Connections, Add	*21.00*	
05 12 23 00-0299	LF	W18 x 46 A992/A36 Structural Beam Or Girder	167.54	62.81
		For Hot Dip Galvanizing, Add	*27.90*	
		For High Strength Low Alloy A572-50 Steel, Add	*15.08*	
		For High Strength Low Alloy A588 Steel, Add	*33.51*	
		For Each Additional Top Copes >2, Add	*1.01*	
		For Structural Tees, WT, MT Or ST, Deduct	*-48.59*	
		For Skewed Or Sloped Connections, Add	*20.10*	
05 12 23 00-0300	LF	W18 x 40 A992/A36 Structural Beam Or Girder	146.59	53.59
		For Hot Dip Galvanizing, Add	*24.80*	
		For High Strength Low Alloy A572-50 Steel, Add	*13.19*	
		For High Strength Low Alloy A588 Steel, Add	*29.32*	
		For Each Additional Top Copes >2, Add	*0.89*	
		For Structural Tees, WT, MT Or ST, Deduct	*-42.72*	
		For Skewed Or Sloped Connections, Add	*17.59*	
05 12 23 00-0301	LF	W18 x 35 A992/A36 Structural Beam Or Girder	137.26	53.46
		For Hot Dip Galvanizing, Add	*22.29*	
		For High Strength Low Alloy A572-50 Steel, Add	*12.35*	
		For High Strength Low Alloy A588 Steel, Add	*27.45*	
		For Each Additional Top Copes >2, Add	*0.80*	
		For Structural Tees, WT, MT Or ST, Deduct	*-39.50*	
		For Skewed Or Sloped Connections, Add	*16.47*	
05 12 23 00-0302	LF	W16 x 100 A992/A36 Structural Beam Or Girder	251.54	48.71
		For Hot Dip Galvanizing, Add	*55.39*	
		For High Strength Low Alloy A572-50 Steel, Add	*22.64*	
		For High Strength Low Alloy A588 Steel, Add	*50.31*	
		For Each Additional Top Copes >2, Add	*2.00*	
		For Structural Tees, WT, MT Or ST, Deduct	*-80.25*	
		For Skewed Or Sloped Connections, Add	*30.18*	
05 12 23 00-0303	LF	W16 x 89 A992/A36 Structural Beam Or Girder	230.47	47.88
		For Hot Dip Galvanizing, Add	*49.78*	
		For High Strength Low Alloy A572-50 Steel, Add	*20.74*	
		For High Strength Low Alloy A588 Steel, Add	*46.09*	
		For Each Additional Top Copes >2, Add	*1.79*	
		For Structural Tees, WT, MT Or ST, Deduct	*-73.00*	
		For Skewed Or Sloped Connections, Add	*27.66*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0304	LF	W16 x 77 A992/A36 Structural Beam Or Girder	207.84	47.32
		For Hot Dip Galvanizing, Add	*43.70*	
		For High Strength Low Alloy A572-50 Steel, Add	*18.71*	
		For High Strength Low Alloy A588 Steel, Add	*41.57*	
		For Each Additional Top Copes >2, Add	*1.57*	
		For Structural Tees, WT, MT Or ST, Deduct	*-65.19*	
		For Skewed Or Sloped Connections, Add	*24.94*	
05 12 23 00-0305	LF	W16 x 67 A992/A36 Structural Beam Or Girder	188.60	46.62
		For Hot Dip Galvanizing, Add	*38.55*	
		For High Strength Low Alloy A572-50 Steel, Add	*16.97*	
		For High Strength Low Alloy A588 Steel, Add	*37.72*	
		For Each Additional Top Copes >2, Add	*1.39*	
		For Structural Tees, WT, MT Or ST, Deduct	*-58.56*	
		For Skewed Or Sloped Connections, Add	*22.63*	
05 12 23 00-0306	LF	W16 x 57 A992/A36 Structural Beam Or Girder	169.56	45.92
		For Hot Dip Galvanizing, Add	*33.46*	
		For High Strength Low Alloy A572-50 Steel, Add	*15.26*	
		For High Strength Low Alloy A588 Steel, Add	*33.91*	
		For Each Additional Top Copes >2, Add	*1.21*	
		For Structural Tees, WT, MT Or ST, Deduct	*-52.00*	
		For Skewed Or Sloped Connections, Add	*20.35*	
05 12 23 00-0307	LF	W16 x 50 A992/A36 Structural Beam Or Girder	156.28	45.50
		For Hot Dip Galvanizing, Add	*29.89*	
		For High Strength Low Alloy A572-50 Steel, Add	*14.07*	
		For High Strength Low Alloy A588 Steel, Add	*31.26*	
		For Each Additional Top Copes >2, Add	*1.08*	
		For Structural Tees, WT, MT Or ST, Deduct	*-47.41*	
		For Skewed Or Sloped Connections, Add	*18.75*	
05 12 23 00-0308	LF	W16 x 45 A992/A36 Structural Beam Or Girder	146.94	45.23
		For Hot Dip Galvanizing, Add	*27.38*	
		For High Strength Low Alloy A572-50 Steel, Add	*13.22*	
		For High Strength Low Alloy A588 Steel, Add	*29.39*	
		For Each Additional Top Copes >2, Add	*0.99*	
		For Structural Tees, WT, MT Or ST, Deduct	*-44.19*	
		For Skewed Or Sloped Connections, Add	*17.63*	
05 12 23 00-0309	LF	W16 x 40 A992/A36 Structural Beam Or Girder	137.25	44.80
		For Hot Dip Galvanizing, Add	*24.80*	
		For High Strength Low Alloy A572-50 Steel, Add	*12.35*	
		For High Strength Low Alloy A588 Steel, Add	*27.45*	
		For Each Additional Top Copes >2, Add	*0.89*	
		For Structural Tees, WT, MT Or ST, Deduct	*-40.86*	
		For Skewed Or Sloped Connections, Add	*16.47*	
05 12 23 00-0310	LF	W16 x 36 A992/A36 Structural Beam Or Girder	129.66	44.52
		For Hot Dip Galvanizing, Add	*22.81*	
		For High Strength Low Alloy A572-50 Steel, Add	*11.67*	
		For High Strength Low Alloy A588 Steel, Add	*25.93*	
		For Each Additional Top Copes >2, Add	*0.82*	
		For Structural Tees, WT, MT Or ST, Deduct	*-38.26*	
		For Skewed Or Sloped Connections, Add	*15.56*	
05 12 23 00-0311	LF	W16 x 31 A992/A36 Structural Beam Or Girder	110.75	35.46
		For Hot Dip Galvanizing, Add	*20.24*	
		For High Strength Low Alloy A572-50 Steel, Add	*9.97*	
		For High Strength Low Alloy A588 Steel, Add	*22.15*	
		For Each Additional Top Copes >2, Add	*0.73*	
		For Structural Tees, WT, MT Or ST, Deduct	*-33.09*	
		For Skewed Or Sloped Connections, Add	*13.29*	
05 12 23 00-0312	LF	W16 x 26 A992/A36 Structural Beam Or Girder	98.56	35.03
		For Hot Dip Galvanizing, Add	*16.97*	
		For High Strength Low Alloy A572-50 Steel, Add	*8.87*	
		For High Strength Low Alloy A588 Steel, Add	*19.71*	
		For Each Additional Top Copes >2, Add	*0.61*	
		For Structural Tees, WT, MT Or ST, Deduct	*-28.88*	
		For Skewed Or Sloped Connections, Add	*11.83*	
05 12 23 00-0313	LF	W14 x 99 A992/A36 Structural Beam Or Girder	240.29	39.92
		For Hot Dip Galvanizing, Add	*54.87*	
		For High Strength Low Alloy A572-50 Steel, Add	*21.63*	
		For High Strength Low Alloy A588 Steel, Add	*48.06*	
		For Each Additional Top Copes >2, Add	*1.98*	
		For Structural Tees, WT, MT Or ST, Deduct	*-77.72*	
		For Skewed Or Sloped Connections, Add	*28.83*	
05 12 23 00-0314	LF	W14 x 90 A992/A36 Structural Beam Or Girder	223.15	39.22
		For Hot Dip Galvanizing, Add	*50.31*	
		For High Strength Low Alloy A572-50 Steel, Add	*20.08*	
		For High Strength Low Alloy A588 Steel, Add	*44.63*	
		For Each Additional Top Copes >2, Add	*1.81*	
		For Structural Tees, WT, MT Or ST, Deduct	*-71.82*	
		For Skewed Or Sloped Connections, Add	*26.78*	
05 12 23 00-0315	LF	W14 x 82 A992/A36 Structural Beam Or Girder	207.84	38.80
		For Hot Dip Galvanizing, Add	*46.21*	
		For High Strength Low Alloy A572-50 Steel, Add	*18.71*	
		For High Strength Low Alloy A588 Steel, Add	*41.57*	
		For Each Additional Top Copes >2, Add	*1.67*	
		For Structural Tees, WT, MT Or ST, Deduct	*-66.55*	
		For Skewed Or Sloped Connections, Add	*24.94*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0316	LF	W14 x 74 A992/A36 Structural Beam Or Girder	192.54	38.24
		For Hot Dip Galvanizing, Add	*42.12*	
		For High Strength Low Alloy A572-50 Steel, Add	*17.33*	
		For High Strength Low Alloy A588 Steel, Add	*38.51*	
		For Each Additional Top Copes >2, Add	*1.52*	
		For Structural Tees, WT, MT Or ST, Deduct	*-61.27*	
		For Skewed Or Sloped Connections, Add	*23.10*	
05 12 23 00-0317	LF	W14 x 68 A992/A36 Structural Beam Or Girder	181.15	37.83
		For Hot Dip Galvanizing, Add	*39.07*	
		For High Strength Low Alloy A572-50 Steel, Add	*16.30*	
		For High Strength Low Alloy A588 Steel, Add	*36.23*	
		For Each Additional Top Copes >2, Add	*1.41*	
		For Structural Tees, WT, MT Or ST, Deduct	*-57.35*	
		For Skewed Or Sloped Connections, Add	*21.74*	
05 12 23 00-0318	LF	W14 x 61 A992/A36 Structural Beam Or Girder	167.87	37.41
		For Hot Dip Galvanizing, Add	*35.51*	
		For High Strength Low Alloy A572-50 Steel, Add	*15.11*	
		For High Strength Low Alloy A588 Steel, Add	*33.57*	
		For Each Additional Top Copes >2, Add	*1.28*	
		For Structural Tees, WT, MT Or ST, Deduct	*-52.77*	
		For Skewed Or Sloped Connections, Add	*20.14*	
05 12 23 00-0319	LF	W14 x 53 A992/A36 Structural Beam Or Girder	152.76	36.85
		For Hot Dip Galvanizing, Add	*31.47*	
		For High Strength Low Alloy A572-50 Steel, Add	*13.75*	
		For High Strength Low Alloy A588 Steel, Add	*30.55*	
		For Each Additional Top Copes >2, Add	*1.13*	
		For Structural Tees, WT, MT Or ST, Deduct	*-47.56*	
		For Skewed Or Sloped Connections, Add	*18.33*	
05 12 23 00-0320	LF	W14 x 48 A992/A36 Structural Beam Or Girder	143.07	36.43
		For Hot Dip Galvanizing, Add	*28.90*	
		For High Strength Low Alloy A572-50 Steel, Add	*12.88*	
		For High Strength Low Alloy A588 Steel, Add	*28.61*	
		For Each Additional Top Copes >2, Add	*1.04*	
		For Structural Tees, WT, MT Or ST, Deduct	*-44.23*	
		For Skewed Or Sloped Connections, Add	*17.17*	
05 12 23 00-0321	LF	W14 x 43 A992/A36 Structural Beam Or Girder	133.52	36.29
		For Hot Dip Galvanizing, Add	*26.32*	
		For High Strength Low Alloy A572-50 Steel, Add	*12.02*	
		For High Strength Low Alloy A588 Steel, Add	*26.70*	
		For Each Additional Top Copes >2, Add	*0.95*	
		For Structural Tees, WT, MT Or ST, Deduct	*-40.93*	
		For Skewed Or Sloped Connections, Add	*16.02*	
05 12 23 00-0322	LF	W14 x 38 A992/A36 Structural Beam Or Girder	124.03	36.01
		For Hot Dip Galvanizing, Add	*23.81*	
		For High Strength Low Alloy A572-50 Steel, Add	*11.16*	
		For High Strength Low Alloy A588 Steel, Add	*24.81*	
		For Each Additional Top Copes >2, Add	*0.86*	
		For Structural Tees, WT, MT Or ST, Deduct	*-37.67*	
		For Skewed Or Sloped Connections, Add	*14.88*	
05 12 23 00-0323	LF	W14 x 34 A992/A36 Structural Beam Or Girder	116.37	35.59
		For Hot Dip Galvanizing, Add	*21.76*	
		For High Strength Low Alloy A572-50 Steel, Add	*10.47*	
		For High Strength Low Alloy A588 Steel, Add	*23.27*	
		For Each Additional Top Copes >2, Add	*0.78*	
		For Structural Tees, WT, MT Or ST, Deduct	*-35.04*	
		For Skewed Or Sloped Connections, Add	*13.96*	
05 12 23 00-0324	LF	W14 x 30 A992/A36 Structural Beam Or Girder	108.73	35.46
		For Hot Dip Galvanizing, Add	*19.71*	
		For High Strength Low Alloy A572-50 Steel, Add	*9.79*	
		For High Strength Low Alloy A588 Steel, Add	*21.75*	
		For Each Additional Top Copes >2, Add	*0.71*	
		For Structural Tees, WT, MT Or ST, Deduct	*-32.40*	
		For Skewed Or Sloped Connections, Add	*13.05*	
05 12 23 00-0325	LF	W14 x 26 A992/A36 Structural Beam Or Girder	101.07	35.03
		For Hot Dip Galvanizing, Add	*17.67*	
		For High Strength Low Alloy A572-50 Steel, Add	*9.10*	
		For High Strength Low Alloy A588 Steel, Add	*20.21*	
		For Each Additional Top Copes >2, Add	*0.64*	
		For Structural Tees, WT, MT Or ST, Deduct	*-29.76*	
		For Skewed Or Sloped Connections, Add	*12.13*	
05 12 23 00-0326	LF	W14 x 22 A992/A36 Structural Beam Or Girder	93.62	34.89
		For Hot Dip Galvanizing, Add	*15.68*	
		For High Strength Low Alloy A572-50 Steel, Add	*8.43*	
		For High Strength Low Alloy A588 Steel, Add	*18.72*	
		For Each Additional Top Copes >2, Add	*0.56*	
		For Structural Tees, WT, MT Or ST, Deduct	*-27.20*	
		For Skewed Or Sloped Connections, Add	*11.23*	
05 12 23 00-0327	LF	W12 x 87 A992/A36 Structural Beam Or Girder	217.53	39.08
		For Hot Dip Galvanizing, Add	*48.78*	
		For High Strength Low Alloy A572-50 Steel, Add	*19.58*	
		For High Strength Low Alloy A588 Steel, Add	*43.51*	
		For Each Additional Top Copes >2, Add	*1.76*	
		For Structural Tees, WT, MT Or ST, Deduct	*-69.88*	
		For Skewed Or Sloped Connections, Add	*26.10*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0328	LF	W12 x 79 A992/A36 Structural Beam Or Girder	202.21	38.52
		For Hot Dip Galvanizing, Add	*44.69*	
		For High Strength Low Alloy A572-50 Steel, Add	*18.20*	
		For High Strength Low Alloy A588 Steel, Add	*40.44*	
		For Each Additional Top Copes >2, Add	*1.61*	
		For Structural Tees, WT, MT Or ST, Deduct	*-64.60*	
		For Skewed Or Sloped Connections, Add	*24.27*	
05 12 23 00-0329	LF	W12 x 72 A992/A36 Structural Beam Or Girder	188.79	38.11
		For Hot Dip Galvanizing, Add	*41.12*	
		For High Strength Low Alloy A572-50 Steel, Add	*16.99*	
		For High Strength Low Alloy A588 Steel, Add	*37.76*	
		For Each Additional Top Copes >2, Add	*1.48*	
		For Structural Tees, WT, MT Or ST, Deduct	*-59.99*	
		For Skewed Or Sloped Connections, Add	*22.65*	
05 12 23 00-0330	LF	W12 x 65 A992/A36 Structural Beam Or Girder	175.53	37.69
		For Hot Dip Galvanizing, Add	*37.55*	
		For High Strength Low Alloy A572-50 Steel, Add	*15.80*	
		For High Strength Low Alloy A588 Steel, Add	*35.11*	
		For Each Additional Top Copes >2, Add	*1.35*	
		For Structural Tees, WT, MT Or ST, Deduct	*-55.41*	
		For Skewed Or Sloped Connections, Add	*21.06*	
05 12 23 00-0331	LF	W12 x 58 A992/A36 Structural Beam Or Girder	162.11	37.13
		For Hot Dip Galvanizing, Add	*33.99*	
		For High Strength Low Alloy A572-50 Steel, Add	*14.59*	
		For High Strength Low Alloy A588 Steel, Add	*32.42*	
		For Each Additional Top Copes >2, Add	*1.22*	
		For Structural Tees, WT, MT Or ST, Deduct	*-50.79*	
		For Skewed Or Sloped Connections, Add	*19.45*	
05 12 23 00-0332	LF	W12 x 53 A992/A36 Structural Beam Or Girder	152.76	36.85
		For Hot Dip Galvanizing, Add	*31.47*	
		For High Strength Low Alloy A572-50 Steel, Add	*13.75*	
		For High Strength Low Alloy A588 Steel, Add	*30.55*	
		For Each Additional Top Copes >2, Add	*1.13*	
		For Structural Tees, WT, MT Or ST, Deduct	*-47.56*	
		For Skewed Or Sloped Connections, Add	*18.33*	
05 12 23 00-0333	LF	W12 x 50 A992/A36 Structural Beam Or Girder	146.79	36.71
		For Hot Dip Galvanizing, Add	*29.89*	
		For High Strength Low Alloy A572-50 Steel, Add	*13.21*	
		For High Strength Low Alloy A588 Steel, Add	*29.36*	
		For Each Additional Top Copes >2, Add	*1.08*	
		For Structural Tees, WT, MT Or ST, Deduct	*-45.51*	
		For Skewed Or Sloped Connections, Add	*17.61*	
05 12 23 00-0334	LF	W12 x 45 A992/A36 Structural Beam Or Girder	137.45	36.43
		For Hot Dip Galvanizing, Add	*27.38*	
		For High Strength Low Alloy A572-50 Steel, Add	*12.37*	
		For High Strength Low Alloy A588 Steel, Add	*27.49*	
		For Each Additional Top Copes >2, Add	*0.99*	
		For Structural Tees, WT, MT Or ST, Deduct	*-42.29*	
		For Skewed Or Sloped Connections, Add	*16.49*	
05 12 23 00-0335	LF	W12 x 40 A992/A36 Structural Beam Or Girder	118.27	27.08
		For Hot Dip Galvanizing, Add	*24.80*	
		For High Strength Low Alloy A572-50 Steel, Add	*10.64*	
		For High Strength Low Alloy A588 Steel, Add	*23.65*	
		For Each Additional Top Copes >2, Add	*0.89*	
		For Structural Tees, WT, MT Or ST, Deduct	*-37.06*	
		For Skewed Or Sloped Connections, Add	*14.19*	
05 12 23 00-0336	LF	W12 x 35 A992/A36 Structural Beam Or Girder	108.93	26.94
		For Hot Dip Galvanizing, Add	*22.29*	
		For High Strength Low Alloy A572-50 Steel, Add	*9.80*	
		For High Strength Low Alloy A588 Steel, Add	*21.79*	
		For Each Additional Top Copes >2, Add	*0.80*	
		For Structural Tees, WT, MT Or ST, Deduct	*-33.83*	
		For Skewed Or Sloped Connections, Add	*13.07*	
05 12 23 00-0337	LF	W12 x 30 A992/A36 Structural Beam Or Girder	99.23	26.52
		For Hot Dip Galvanizing, Add	*19.71*	
		For High Strength Low Alloy A572-50 Steel, Add	*8.93*	
		For High Strength Low Alloy A588 Steel, Add	*19.85*	
		For Each Additional Top Copes >2, Add	*0.71*	
		For Structural Tees, WT, MT Or ST, Deduct	*-30.50*	
		For Skewed Or Sloped Connections, Add	*11.91*	
05 12 23 00-0338	LF	W12 x 26 A992/A36 Structural Beam Or Girder	91.58	26.24
		For Hot Dip Galvanizing, Add	*17.67*	
		For High Strength Low Alloy A572-50 Steel, Add	*8.24*	
		For High Strength Low Alloy A588 Steel, Add	*18.32*	
		For Each Additional Top Copes >2, Add	*0.64*	
		For Structural Tees, WT, MT Or ST, Deduct	*-27.87*	
		For Skewed Or Sloped Connections, Add	*10.99*	
05 12 23 00-0339	LF	W12 x 22 A992/A36 Structural Beam Or Girder	84.13	25.97
		For Hot Dip Galvanizing, Add	*15.68*	
		For High Strength Low Alloy A572-50 Steel, Add	*7.57*	
		For High Strength Low Alloy A588 Steel, Add	*16.83*	
		For Each Additional Top Copes >2, Add	*0.56*	
		For Structural Tees, WT, MT Or ST, Deduct	*-25.30*	
		For Skewed Or Sloped Connections, Add	*10.10*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0340	LF	W12 x 19 A992/A36 Structural Beam Or Girder	78.29	25.82
		For Hot Dip Galvanizing, Add	*14.10*	
		For High Strength Low Alloy A572-50 Steel, Add	*7.05*	
		For High Strength Low Alloy A588 Steel, Add	*15.66*	
		For Each Additional Top Copes >2, Add	*0.51*	
		For Structural Tees, WT, MT Or ST, Deduct	*-23.28*	
		For Skewed Or Sloped Connections, Add	*9.39*	
05 12 23 00-0341	LF	W12 x 16 A992/A36 Structural Beam Or Girder	72.53	25.40
		For Hot Dip Galvanizing, Add	*12.58*	
		For High Strength Low Alloy A572-50 Steel, Add	*6.53*	
		For High Strength Low Alloy A588 Steel, Add	*14.51*	
		For Each Additional Top Copes >2, Add	*0.45*	
		For Structural Tees, WT, MT Or ST, Deduct	*-21.30*	
		For Skewed Or Sloped Connections, Add	*8.70*	
05 12 23 00-0342	LF	W12 x 14 A992/A36 Structural Beam Or Girder	68.82	25.40
		For Hot Dip Galvanizing, Add	*11.58*	
		For High Strength Low Alloy A572-50 Steel, Add	*6.19*	
		For High Strength Low Alloy A588 Steel, Add	*13.76*	
		For Each Additional Top Copes >2, Add	*0.42*	
		For Structural Tees, WT, MT Or ST, Deduct	*-20.03*	
		For Skewed Or Sloped Connections, Add	*8.26*	
05 12 23 00-0343	LF	W10 x 68 A992/A36 Structural Beam Or Girder	172.22	29.17
		For Hot Dip Galvanizing, Add	*39.19*	
		For High Strength Low Alloy A572-50 Steel, Add	*15.50*	
		For High Strength Low Alloy A588 Steel, Add	*34.44*	
		For Each Additional Top Copes >2, Add	*1.41*	
		For Structural Tees, WT, MT Or ST, Deduct	*-55.63*	
		For Skewed Or Sloped Connections, Add	*20.67*	
05 12 23 00-0344	LF	W10 x 60 A992/A36 Structural Beam Or Girder	157.11	28.62
		For Hot Dip Galvanizing, Add	*35.15*	
		For High Strength Low Alloy A572-50 Steel, Add	*14.14*	
		For High Strength Low Alloy A588 Steel, Add	*31.42*	
		For Each Additional Top Copes >2, Add	*1.27*	
		For Structural Tees, WT, MT Or ST, Deduct	*-50.42*	
		For Skewed Or Sloped Connections, Add	*18.85*	
05 12 23 00-0345	LF	W10 x 54 A992/A36 Structural Beam Or Girder	145.52	28.05
		For Hot Dip Galvanizing, Add	*32.05*	
		For High Strength Low Alloy A572-50 Steel, Add	*13.10*	
		For High Strength Low Alloy A588 Steel, Add	*29.10*	
		For Each Additional Top Copes >2, Add	*1.16*	
		For Structural Tees, WT, MT Or ST, Deduct	*-46.43*	
		For Skewed Or Sloped Connections, Add	*17.46*	
05 12 23 00-0346	LF	W10 x 49 A992/A36 Structural Beam Or Girder	136.04	27.77
		For Hot Dip Galvanizing, Add	*29.54*	
		For High Strength Low Alloy A572-50 Steel, Add	*12.24*	
		For High Strength Low Alloy A588 Steel, Add	*27.21*	
		For Each Additional Top Copes >2, Add	*1.06*	
		For Structural Tees, WT, MT Or ST, Deduct	*-43.18*	
		For Skewed Or Sloped Connections, Add	*16.32*	
05 12 23 00-0347	LF	W10 x 45 A992/A36 Structural Beam Or Girder	128.38	27.64
		For Hot Dip Galvanizing, Add	*27.49*	
		For High Strength Low Alloy A572-50 Steel, Add	*11.55*	
		For High Strength Low Alloy A588 Steel, Add	*25.68*	
		For Each Additional Top Copes >2, Add	*0.99*	
		For Structural Tees, WT, MT Or ST, Deduct	*-40.54*	
		For Skewed Or Sloped Connections, Add	*15.41*	
05 12 23 00-0348	LF	W10 x 39 A992/A36 Structural Beam Or Girder	117.01	27.08
		For Hot Dip Galvanizing, Add	*24.45*	
		For High Strength Low Alloy A572-50 Steel, Add	*10.53*	
		For High Strength Low Alloy A588 Steel, Add	*23.40*	
		For Each Additional Top Copes >2, Add	*0.88*	
		For Structural Tees, WT, MT Or ST, Deduct	*-36.62*	
		For Skewed Or Sloped Connections, Add	*14.04*	
05 12 23 00-0349	LF	W10 x 33 A992/A36 Structural Beam Or Girder	105.62	26.66
		For Hot Dip Galvanizing, Add	*21.41*	
		For High Strength Low Alloy A572-50 Steel, Add	*9.51*	
		For High Strength Low Alloy A588 Steel, Add	*21.12*	
		For Each Additional Top Copes >2, Add	*0.77*	
		For Structural Tees, WT, MT Or ST, Deduct	*-32.70*	
		For Skewed Or Sloped Connections, Add	*12.67*	
05 12 23 00-0350	LF	W10 x 30 A992/A36 Structural Beam Or Girder	99.80	26.52
		For Hot Dip Galvanizing, Add	*19.83*	
		For High Strength Low Alloy A572-50 Steel, Add	*8.98*	
		For High Strength Low Alloy A588 Steel, Add	*19.96*	
		For Each Additional Top Copes >2, Add	*0.71*	
		For Structural Tees, WT, MT Or ST, Deduct	*-30.68*	
		For Skewed Or Sloped Connections, Add	*11.98*	
05 12 23 00-0351	LF	W10 x 26 A992/A36 Structural Beam Or Girder	92.34	26.38
		For Hot Dip Galvanizing, Add	*17.84*	
		For High Strength Low Alloy A572-50 Steel, Add	*8.31*	
		For High Strength Low Alloy A588 Steel, Add	*18.47*	
		For Each Additional Top Copes >2, Add	*0.64*	
		For Structural Tees, WT, MT Or ST, Deduct	*-28.11*	
		For Skewed Or Sloped Connections, Add	*11.08*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0352	LF	W10 x 22 A992/A36 Structural Beam Or Girder	84.55	25.97
		For Hot Dip Galvanizing, Add	*15.79*	
		For High Strength Low Alloy A572-50 Steel, Add	*7.61*	
		For High Strength Low Alloy A588 Steel, Add	*16.91*	
		For Each Additional Top Copes >2, Add	*0.57*	
		For Structural Tees, WT, MT Or ST, Deduct	*-25.45*	
		For Skewed Or Sloped Connections, Add	*10.15*	
05 12 23 00-0353	LF	W10 x 19 A992/A36 Structural Beam Or Girder	78.92	25.82
		For Hot Dip Galvanizing, Add	*14.27*	
		For High Strength Low Alloy A572-50 Steel, Add	*7.10*	
		For High Strength Low Alloy A588 Steel, Add	*15.78*	
		For Each Additional Top Copes >2, Add	*0.51*	
		For Structural Tees, WT, MT Or ST, Deduct	*-23.50*	
		For Skewed Or Sloped Connections, Add	*9.47*	
05 12 23 00-0354	LF	W10 x 17 A992/A36 Structural Beam Or Girder	75.00	25.68
		For Hot Dip Galvanizing, Add	*13.22*	
		For High Strength Low Alloy A572-50 Steel, Add	*6.75*	
		For High Strength Low Alloy A588 Steel, Add	*15.00*	
		For Each Additional Top Copes >2, Add	*0.48*	
		For Structural Tees, WT, MT Or ST, Deduct	*-22.15*	
		For Skewed Or Sloped Connections, Add	*9.00*	
05 12 23 00-0355	LF	W10 x 15 A992/A36 Structural Beam Or Girder	71.26	25.40
		For Hot Dip Galvanizing, Add	*12.22*	
		For High Strength Low Alloy A572-50 Steel, Add	*6.41*	
		For High Strength Low Alloy A588 Steel, Add	*14.25*	
		For Each Additional Top Copes >2, Add	*0.44*	
		For Structural Tees, WT, MT Or ST, Deduct	*-20.86*	
		For Skewed Or Sloped Connections, Add	*8.55*	
05 12 23 00-0356	LF	W10 x 12 A992/A36 Structural Beam Or Girder	65.65	25.40
		For Hot Dip Galvanizing, Add	*10.70*	
		For High Strength Low Alloy A572-50 Steel, Add	*5.91*	
		For High Strength Low Alloy A588 Steel, Add	*13.13*	
		For Each Additional Top Copes >2, Add	*0.39*	
		For Structural Tees, WT, MT Or ST, Deduct	*-18.92*	
		For Skewed Or Sloped Connections, Add	*7.88*	
05 12 23 00-0357	LF	W8 x 35 A992/A36 Structural Beam Or Girder	109.35	26.94
		For Hot Dip Galvanizing, Add	*22.40*	
		For High Strength Low Alloy A572-50 Steel, Add	*9.84*	
		For High Strength Low Alloy A588 Steel, Add	*21.87*	
		For Each Additional Top Copes >2, Add	*0.81*	
		For Structural Tees, WT, MT Or ST, Deduct	*-33.98*	
		For Skewed Or Sloped Connections, Add	*13.12*	
05 12 23 00-0358	LF	W8 x 31 A992/A36 Structural Beam Or Girder	101.69	26.52
		For Hot Dip Galvanizing, Add	*20.35*	
		For High Strength Low Alloy A572-50 Steel, Add	*9.15*	
		For High Strength Low Alloy A588 Steel, Add	*20.34*	
		For Each Additional Top Copes >2, Add	*0.73*	
		For Structural Tees, WT, MT Or ST, Deduct	*-31.34*	
		For Skewed Or Sloped Connections, Add	*12.20*	
05 12 23 00-0359	LF	W8 x 28 A992/A36 Structural Beam Or Girder	94.53	24.99
		For Hot Dip Galvanizing, Add	*18.83*	
		For High Strength Low Alloy A572-50 Steel, Add	*8.51*	
		For High Strength Low Alloy A588 Steel, Add	*18.91*	
		For Each Additional Top Copes >2, Add	*0.68*	
		For Structural Tees, WT, MT Or ST, Deduct	*-29.09*	
		For Skewed Or Sloped Connections, Add	*11.34*	
05 12 23 00-0360	LF	W8 x 24 A992/A36 Structural Beam Or Girder	86.14	23.45
		For Hot Dip Galvanizing, Add	*16.97*	
		For High Strength Low Alloy A572-50 Steel, Add	*7.75*	
		For High Strength Low Alloy A588 Steel, Add	*17.23*	
		For Each Additional Top Copes >2, Add	*0.61*	
		For Structural Tees, WT, MT Or ST, Deduct	*-26.40*	
		For Skewed Or Sloped Connections, Add	*10.34*	
05 12 23 00-0361	LF	W8 x 21 A992/A36 Structural Beam Or Girder	80.14	21.78
		For Hot Dip Galvanizing, Add	*15.77*	
		For High Strength Low Alloy A572-50 Steel, Add	*7.21*	
		For High Strength Low Alloy A588 Steel, Add	*16.03*	
		For Each Additional Top Copes >2, Add	*0.57*	
		For Structural Tees, WT, MT Or ST, Deduct	*-24.55*	
		For Skewed Or Sloped Connections, Add	*9.62*	
05 12 23 00-0362	LF	W8 x 18 A992/A36 Structural Beam Or Girder	70.02	20.24
		For Hot Dip Galvanizing, Add	*13.43*	
		For High Strength Low Alloy A572-50 Steel, Add	*6.30*	
		For High Strength Low Alloy A588 Steel, Add	*14.00*	
		For Each Additional Top Copes >2, Add	*0.48*	
		For Structural Tees, WT, MT Or ST, Deduct	*-21.26*	
		For Skewed Or Sloped Connections, Add	*8.40*	
05 12 23 00-0363	LF	W8 x 10 A992/A36 Structural Beam Or Girder	41.19	14.51
		For Hot Dip Galvanizing, Add	*7.17*	
		For High Strength Low Alloy A572-50 Steel, Add	*3.71*	
		For High Strength Low Alloy A588 Steel, Add	*8.24*	
		For Each Additional Top Copes >2, Add	*0.26*	
		For Structural Tees, WT, MT Or ST, Deduct	*-12.11*	
		For Skewed Or Sloped Connections, Add	*4.94*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0364	LF	W6 x 9 A992/A36 Structural Beam Or Girder	38.08	11.86
		For Hot Dip Galvanizing, Add	*7.08*	
		For High Strength Low Alloy A572-50 Steel, Add	*3.43*	
		For High Strength Low Alloy A588 Steel, Add	*7.62*	
		For Each Additional Top Copes >2, Add	*0.26*	
		For Structural Tees, WT, MT Or ST, Deduct	*-11.44*	
		For Skewed Or Sloped Connections, Add	*4.57*	
05 12 23 00-0365		**A992/A36 Structural Steel, M Shapes** *(05 12 23 00-0147)*		
		Note: Includes material delivery and erection.		
05 12 23 00-0366	LF	M14 x 18 A992/A36 Structural Steel	72.70	18.40
		For Hot Dip Galvanizing, Add	*14.73*	
		For High Strength Low Alloy A572-50 Steel, Add	*6.54*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*14.54*	
05 12 23 00-0367	LF	M12 x 11.8 A992/A36 Structural Steel	52.16	16.28
		For Hot Dip Galvanizing, Add	*9.66*	
		For High Strength Low Alloy A572-50 Steel, Add	*4.69*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*10.43*	
05 12 23 00-0368	LF	M10 x 9 A992/A36 Structural Steel	40.47	13.07
		For Hot Dip Galvanizing, Add	*7.36*	
		For High Strength Low Alloy A572-50 Steel, Add	*3.64*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*8.09*	
05 12 23 00-0369	LF	M8 x 6.5 A992/A36 Structural Steel	29.23	9.43
		For Hot Dip Galvanizing, Add	*5.32*	
		For High Strength Low Alloy A572-50 Steel, Add	*2.63*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*5.85*	
05 12 23 00-0370	LF	M6 x 20 A992/A36 Structural Steel	82.71	22.47
		For Hot Dip Galvanizing, Add	*16.37*	
		For High Strength Low Alloy A572-50 Steel, Add	*7.44*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*16.54*	
05 12 23 00-0371	LF	M6 x 4.4 A992/A36 Structural Steel	19.77	6.38
		For Hot Dip Galvanizing, Add	*3.59*	
		For High Strength Low Alloy A572-50 Steel, Add	*1.78*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*3.95*	
05 12 23 00-0372	LF	M5 x 18.9 A992/A36 Structural Steel	79.65	22.47
		For Hot Dip Galvanizing, Add	*15.44*	
		For High Strength Low Alloy A572-50 Steel, Add	*7.17*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*15.93*	
05 12 23 00-0373	LF	M4 x 13 A992/A36 Structural Steel	65.40	22.06
		For Hot Dip Galvanizing, Add	*11.64*	
		For High Strength Low Alloy A572-50 Steel, Add	*5.89*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*13.08*	
05 12 23 00-0374		**A992/A36 Structural Steel, S Shapes** *(05 12 23 00-0147)*		
		Note: Includes material delivery and erection.		
05 12 23 00-0375	LF	S24 x 121 A992/A36 Structural Steel	437.39	93.23
		For Hot Dip Galvanizing, Add	*93.80*	
		For High Strength Low Alloy A572-50 Steel, Add	*39.37*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*87.48*	
05 12 23 00-0376	LF	S24 x 106 A992/A36 Structural Steel	387.76	85.97
		For Hot Dip Galvanizing, Add	*82.17*	
		For High Strength Low Alloy A572-50 Steel, Add	*34.90*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*77.55*	
05 12 23 00-0377	LF	S24 x 100 A992/A36 Structural Steel	370.36	85.36
		For Hot Dip Galvanizing, Add	*77.52*	
		For High Strength Low Alloy A572-50 Steel, Add	*33.33*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*74.07*	
05 12 23 00-0378	LF	S24 x 90 A992/A36 Structural Steel	337.64	80.87
		For Hot Dip Galvanizing, Add	*69.77*	
		For High Strength Low Alloy A572-50 Steel, Add	*30.39*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*67.53*	
05 12 23 00-0379	LF	S24 x 80 A992/A36 Structural Steel	304.14	75.68
		For Hot Dip Galvanizing, Add	*62.01*	
		For High Strength Low Alloy A572-50 Steel, Add	*27.37*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*60.83*	
05 12 23 00-0380	LF	S20 x 96 A992/A36 Structural Steel	355.55	81.95
		For Hot Dip Galvanizing, Add	*74.42*	
		For High Strength Low Alloy A572-50 Steel, Add	*32.00*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*71.11*	
05 12 23 00-0381	LF	S20 x 86 A992/A36 Structural Steel	322.62	77.28
		For Hot Dip Galvanizing, Add	*66.66*	
		For High Strength Low Alloy A572-50 Steel, Add	*29.04*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*64.52*	
05 12 23 00-0382	LF	S20 x 75 A992/A36 Structural Steel	285.14	70.95
		For Hot Dip Galvanizing, Add	*58.14*	
		For High Strength Low Alloy A572-50 Steel, Add	*25.66*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*57.03*	
05 12 23 00-0383	LF	S20 x 66 A992/A36 Structural Steel	254.43	65.71
		For Hot Dip Galvanizing, Add	*51.16*	
		For High Strength Low Alloy A572-50 Steel, Add	*22.90*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*50.89*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0384	LF	S18 x 70 A992/A36 Structural Steel	269.85	69.70
		For Hot Dip Galvanizing, Add	*54.26*	
		For High Strength Low Alloy A572-50 Steel, Add	*24.29*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*53.97*	
05 12 23 00-0385	LF	S18 x 54.7 A992/A36 Structural Steel	213.93	57.34
		For Hot Dip Galvanizing, Add	*42.40*	
		For High Strength Low Alloy A572-50 Steel, Add	*19.25*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*42.79*	
05 12 23 00-0386	LF	S15 x 50 A992/A36 Structural Steel	198.49	55.16
		For Hot Dip Galvanizing, Add	*38.76*	
		For High Strength Low Alloy A572-50 Steel, Add	*17.86*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*39.70*	
05 12 23 00-0387	LF	S15 x 42.9 A992/A36 Structural Steel	172.96	49.82
		For Hot Dip Galvanizing, Add	*33.26*	
		For High Strength Low Alloy A572-50 Steel, Add	*15.57*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*34.59*	
05 12 23 00-0388	LF	S12 x 50 A992/A36 Structural Steel	195.54	52.41
		For Hot Dip Galvanizing, Add	*38.76*	
		For High Strength Low Alloy A572-50 Steel, Add	*17.60*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*39.11*	
05 12 23 00-0389	LF	S12 x 40.8 A992/A36 Structural Steel	161.96	45.02
		For Hot Dip Galvanizing, Add	*31.63*	
		For High Strength Low Alloy A572-50 Steel, Add	*14.58*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*32.39*	
05 12 23 00-0390	LF	S12 x 35 A992/A36 Structural Steel	141.10	40.64
		For Hot Dip Galvanizing, Add	*27.13*	
		For High Strength Low Alloy A572-50 Steel, Add	*12.70*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*28.22*	
05 12 23 00-0391	LF	S12 x 31.8 A992/A36 Structural Steel	130.28	38.87
		For Hot Dip Galvanizing, Add	*24.65*	
		For High Strength Low Alloy A572-50 Steel, Add	*11.73*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*26.06*	
05 12 23 00-0392	LF	S10 x 35 A992/A36 Structural Steel	143.39	42.79
		For Hot Dip Galvanizing, Add	*27.13*	
		For High Strength Low Alloy A572-50 Steel, Add	*12.91*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*28.68*	
05 12 23 00-0393	LF	S10 x 25.4 A992/A36 Structural Steel	105.80	32.68
		For Hot Dip Galvanizing, Add	*19.69*	
		For High Strength Low Alloy A572-50 Steel, Add	*9.52*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*21.16*	
05 12 23 00-0394	LF	S8 x 23 A992/A36 Structural Steel	95.81	29.59
		For Hot Dip Galvanizing, Add	*17.83*	
		For High Strength Low Alloy A572-50 Steel, Add	*8.62*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*19.16*	
05 12 23 00-0395	LF	S8 x 18.4 A992/A36 Structural Steel	77.98	24.93
		For Hot Dip Galvanizing, Add	*14.26*	
		For High Strength Low Alloy A572-50 Steel, Add	*7.02*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*15.60*	
05 12 23 00-0396	LF	S7 x 20 A992/A36 Structural Steel	84.75	27.09
		For Hot Dip Galvanizing, Add	*15.50*	
		For High Strength Low Alloy A572-50 Steel, Add	*7.63*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*16.95*	
05 12 23 00-0397	LF	S7 x 15.3 A992/A36 Structural Steel	66.00	21.82
		For Hot Dip Galvanizing, Add	*11.86*	
		For High Strength Low Alloy A572-50 Steel, Add	*5.94*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*13.20*	
05 12 23 00-0398	LF	S6 x 17.25 A992/A36 Structural Steel	73.32	23.57
		For Hot Dip Galvanizing, Add	*13.37*	
		For High Strength Low Alloy A572-50 Steel, Add	*6.60*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*14.66*	
05 12 23 00-0399	LF	S6 x 12.5 A992/A36 Structural Steel	62.83	21.78
		For Hot Dip Galvanizing, Add	*10.97*	
		For High Strength Low Alloy A572-50 Steel, Add	*5.65*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*12.57*	
05 12 23 00-0400	LF	S5 x 14.75 A992/A36 Structural Steel	66.92	22.19
		For Hot Dip Galvanizing, Add	*12.02*	
		For High Strength Low Alloy A572-50 Steel, Add	*6.02*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*13.38*	
05 12 23 00-0401	LF	S5 x 10 A992/A36 Structural Steel	56.80	21.63
		For Hot Dip Galvanizing, Add	*9.33*	
		For High Strength Low Alloy A572-50 Steel, Add	*5.11*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*11.36*	
05 12 23 00-0402	LF	S4 x 9.5 A992/A36 Structural Steel	55.24	21.63
		For Hot Dip Galvanizing, Add	*8.90*	
		For High Strength Low Alloy A572-50 Steel, Add	*4.97*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*11.05*	
05 12 23 00-0403	LF	S4 x 7.7 A992/A36 Structural Steel	51.63	21.63
		For Hot Dip Galvanizing, Add	*7.94*	
		For High Strength Low Alloy A572-50 Steel, Add	*4.65*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*10.33*	
05 12 23 00-0404	LF	S3 x 7.5 A992/A36 Structural Steel	51.28	21.63
		For Hot Dip Galvanizing, Add	*7.84*	
		For High Strength Low Alloy A572-50 Steel, Add	*4.62*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*10.26*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0405	LF	S3 x 5.7 A992/A36 Structural Steel	46.98	21.50
		For Hot Dip Galvanizing, Add	*6.68*	
		For High Strength Low Alloy A572-50 Steel, Add	*4.23*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*9.40*	

05 12 23 00-0406 A992/A36 Structural Steel, HP Shapes *(05 12 23 00-0147)*

Note: Includes material delivery and erection.

05 12 23 00-0407	LF	HP14 x 117 A992/A36 Structural Steel	269.50	27.62
		For Hot Dip Galvanizing, Add	*66.62*	
		For High Strength Low Alloy A572-50 Steel, Add	*24.26*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*53.90*	
05 12 23 00-0408	LF	HP14 x 102 A992/A36 Structural Steel	235.82	25.70
		For Hot Dip Galvanizing, Add	*57.84*	
		For High Strength Low Alloy A572-50 Steel, Add	*21.22*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*47.16*	
05 12 23 00-0409	LF	HP14 x 89 A992/A36 Structural Steel	210.10	24.11
		For Hot Dip Galvanizing, Add	*51.17*	
		For High Strength Low Alloy A572-50 Steel, Add	*18.91*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*42.02*	
05 12 23 00-0410	LF	HP14 x 73 A992/A36 Structural Steel	173.93	22.72
		For Hot Dip Galvanizing, Add	*41.55*	
		For High Strength Low Alloy A572-50 Steel, Add	*15.65*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*34.79*	
05 12 23 00-0411	LF	HP13 x 100 A992/A36 Structural Steel	231.20	25.20
		For Hot Dip Galvanizing, Add	*56.70*	
		For High Strength Low Alloy A572-50 Steel, Add	*20.81*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*46.24*	
05 12 23 00-0412	LF	HP13 x 87 A992/A36 Structural Steel	205.39	23.57
		For Hot Dip Galvanizing, Add	*50.02*	
		For High Strength Low Alloy A572-50 Steel, Add	*18.49*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*41.08*	
05 12 23 00-0413	LF	HP13 x 73 A992/A36 Structural Steel	173.93	22.72
		For Hot Dip Galvanizing, Add	*41.55*	
		For High Strength Low Alloy A572-50 Steel, Add	*15.65*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*34.79*	
05 12 23 00-0414	LF	HP13 x 60 A992/A36 Structural Steel	147.36	21.78
		For Hot Dip Galvanizing, Add	*34.45*	
		For High Strength Low Alloy A572-50 Steel, Add	*13.26*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*29.47*	
05 12 23 00-0415	LF	HP12 x 84 A992/A36 Structural Steel	193.74	24.85
		For Hot Dip Galvanizing, Add	*46.41*	
		For High Strength Low Alloy A572-50 Steel, Add	*17.44*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*38.75*	
05 12 23 00-0416	LF	HP12 x 74 A992/A36 Structural Steel	171.17	23.44
		For Hot Dip Galvanizing, Add	*40.57*	
		For High Strength Low Alloy A572-50 Steel, Add	*15.41*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*34.23*	
05 12 23 00-0417	LF	HP12 x 63 A992/A36 Structural Steel	147.35	21.55
		For Hot Dip Galvanizing, Add	*34.51*	
		For High Strength Low Alloy A572-50 Steel, Add	*13.26*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*29.47*	
05 12 23 00-0418	LF	HP12 x 53 A992/A36 Structural Steel	135.10	20.49
		For Hot Dip Galvanizing, Add	*31.43*	
		For High Strength Low Alloy A572-50 Steel, Add	*12.16*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*27.02*	
05 12 23 00-0419	LF	HP10 x 57 A992/A36 Structural Steel	142.33	21.03
		For Hot Dip Galvanizing, Add	*33.28*	
		For High Strength Low Alloy A572-50 Steel, Add	*12.81*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*28.47*	
05 12 23 00-0420	LF	HP10 x 42 A992/A36 Structural Steel	117.29	19.71
		For Hot Dip Galvanizing, Add	*26.71*	
		For High Strength Low Alloy A572-50 Steel, Add	*10.56*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*23.46*	
05 12 23 00-0421	LF	HP8 x 36 A992/A36 Structural Steel	101.98	18.58
		For Hot Dip Galvanizing, Add	*22.80*	
		For High Strength Low Alloy A572-50 Steel, Add	*9.18*	
		For High Strength Low Alloy A588 Grade B Steel, Add	*20.40*	

05 12 23 00-0422 Lightweight Framing Steel Shapes *(05 12 23)*

Note: Includes cutting to length. Excludes fasteners or welds. When used with structural steel shapes by TON, connecting bolts or welds are considered included with structural steel tasks by TON.

05 12 23 00-0423 Angle Iron - L *(05 12 23 00-0422)*

05 12 23 00-0424 1/8" Thick *(05 12 23 00-0423)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0425	LF	1/2" x 1/2" x 1/8" Thick, Plain Steel Angle Iron	3.08	1.88
		For >100 To 250, Deduct	*-0.20*	
		For >250 To 500, Deduct	*-0.28*	
		For >500 To 1,000, Deduct	*-0.42*	
		For >1,000, Deduct	*-0.56*	
		For 304 Stainless Steel, Add	*1.60*	
		For 316 Stainless Steel, Add	*1.79*	
		For Aluminum, Add	*0.10*	
		For Galvanized Steel, Add	*0.35*	
		For High Strength Steel (HSS), Add	*0.62*	
05 12 23 00-0426	LF	3/4" x 1/2" x 1/8" Thick, Plain Steel Angle Iron	3.56	2.13
		For >100 To 250, Deduct	*-0.23*	
		For >250 To 500, Deduct	*-0.32*	
		For >500 To 1,000, Deduct	*-0.48*	
		For >1,000, Deduct	*-0.64*	
		For 304 Stainless Steel, Add	*2.02*	
		For 316 Stainless Steel, Add	*2.27*	
		For Aluminum, Add	*0.13*	
		For Galvanized Steel, Add	*0.44*	
		For High Strength Steel (HSS), Add	*0.71*	
05 12 23 00-0427	LF	3/4" x 3/4" x 1/8" Thick, Plain Steel Angle Iron	4.02	2.36
		For >100 To 250, Deduct	*-0.26*	
		For >250 To 500, Deduct	*-0.36*	
		For >500 To 1,000, Deduct	*-0.54*	
		For >1,000, Deduct	*-0.72*	
		For 304 Stainless Steel, Add	*2.51*	
		For 316 Stainless Steel, Add	*2.82*	
		For Aluminum, Add	*0.16*	
		For Galvanized Steel, Add	*0.55*	
		For High Strength Steel (HSS), Add	*0.80*	
05 12 23 00-0428	LF	1" x 3/4" x 1/8" Thick, Plain Steel Angle Iron	4.51	2.62
		For >100 To 250, Deduct	*-0.29*	
		For >250 To 500, Deduct	*-0.40*	
		For >500 To 1,000, Deduct	*-0.60*	
		For >1,000, Deduct	*-0.80*	
		For 304 Stainless Steel, Add	*2.91*	
		For 316 Stainless Steel, Add	*3.26*	
		For Aluminum, Add	*0.18*	
		For Galvanized Steel, Add	*0.63*	
		For High Strength Steel (HSS), Add	*0.90*	
05 12 23 00-0429	LF	1" x 1" x 1/8" Thick, Plain Steel Angle Iron	4.97	2.83
		For >100 To 250, Deduct	*-0.31*	
		For >250 To 500, Deduct	*-0.44*	
		For >500 To 1,000, Deduct	*-0.66*	
		For >1,000, Deduct	*-0.88*	
		For 304 Stainless Steel, Add	*3.39*	
		For 316 Stainless Steel, Add	*3.81*	
		For Aluminum, Add	*0.21*	
		For Galvanized Steel, Add	*0.74*	
		For High Strength Steel (HSS), Add	*0.99*	
05 12 23 00-0430	LF	1-1/4" x 1-1/4" x 1/8" Thick, Plain Steel Angle Iron	5.94	3.33
		For >100 To 250, Deduct	*-0.37*	
		For >250 To 500, Deduct	*-0.52*	
		For >500 To 1,000, Deduct	*-0.78*	
		For >1,000, Deduct	*-1.04*	
		For 304 Stainless Steel, Add	*4.28*	
		For 316 Stainless Steel, Add	*4.80*	
		For Aluminum, Add	*0.27*	
		For Galvanized Steel, Add	*0.93*	
		For High Strength Steel (HSS), Add	*1.19*	
05 12 23 00-0431	LF	1-1/2" x 1" x 1/8" Thick, Plain Steel Angle Iron	5.94	3.33
		For >100 To 250, Deduct	*-0.37*	
		For >250 To 500, Deduct	*-0.52*	
		For >500 To 1,000, Deduct	*-0.78*	
		For >1,000, Deduct	*-1.04*	
		For 304 Stainless Steel, Add	*4.28*	
		For 316 Stainless Steel, Add	*4.80*	
		For Aluminum, Add	*0.27*	
		For Galvanized Steel, Add	*0.93*	
		For High Strength Steel (HSS), Add	*1.19*	
05 12 23 00-0432	LF	1-1/2" x 1-1/2" x 1/8" Thick, Plain Steel Angle Iron	6.57	3.57
		For >100 To 250, Deduct	*-0.40*	
		For >250 To 500, Deduct	*-0.57*	
		For >500 To 1,000, Deduct	*-0.85*	
		For >1,000, Deduct	*-1.13*	
		For 304 Stainless Steel, Add	*5.13*	
		For 316 Stainless Steel, Add	*5.76*	
		For Aluminum, Add	*0.32*	
		For Galvanized Steel, Add	*1.12*	
		For High Strength Steel (HSS), Add	*1.31*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0433	LF	1-3/4" x 1-3/4" x 1/8" Thick, Plain Steel Angle Iron	7.07	3.70
		For >100 To 250, Deduct	*-0.42*	
		For >250 To 500, Deduct	*-0.60*	
		For >500 To 1,000, Deduct	*-0.90*	
		For >1,000, Deduct	*-1.20*	
		For 304 Stainless Steel, Add	*6.10*	
		For 316 Stainless Steel, Add	*6.85*	
		For Aluminum, Add	*0.39*	
		For Galvanized Steel, Add	*1.33*	
		For High Strength Steel (HSS), Add	*1.41*	
05 12 23 00-0434	LF	2" x 1-1/2" x 1/8" Thick, Plain Steel Angle Iron	7.07	3.70
		For >100 To 250, Deduct	*-0.42*	
		For >250 To 500, Deduct	*-0.60*	
		For >500 To 1,000, Deduct	*-0.90*	
		For >1,000, Deduct	*-1.20*	
		For 304 Stainless Steel, Add	*6.10*	
		For 316 Stainless Steel, Add	*6.85*	
		For Aluminum, Add	*0.39*	
		For Galvanized Steel, Add	*1.33*	
		For High Strength Steel (HSS), Add	*1.41*	
05 12 23 00-0435	LF	2" x 2" x 1/8" Thick, Plain Steel Angle Iron	7.55	3.82
		For >100 To 250, Deduct	*-0.44*	
		For >250 To 500, Deduct	*-0.63*	
		For >500 To 1,000, Deduct	*-0.95*	
		For >1,000, Deduct	*-1.27*	
		For 304 Stainless Steel, Add	*6.98*	
		For 316 Stainless Steel, Add	*7.84*	
		For Aluminum, Add	*0.44*	
		For Galvanized Steel, Add	*1.52*	
		For High Strength Steel (HSS), Add	*1.51*	

05 12 23 00-0436 3/16" Thick *(05 12 23 00-0423)*

05 12 23 00-0437	LF	1" x 1" x 3/16" Thick, Plain Steel Angle Iron	5.71	2.99
		For >100 To 250, Deduct	*-0.34*	
		For >250 To 500, Deduct	*-0.49*	
		For >500 To 1,000, Deduct	*-0.73*	
		For >1,000, Deduct	*-0.97*	
		For 304 Stainless Steel, Add	*4.90*	
		For 316 Stainless Steel, Add	*5.50*	
		For Aluminum, Add	*0.31*	
		For Galvanized Steel, Add	*1.07*	
		For High Strength Steel (HSS), Add	*1.14*	
05 12 23 00-0438	LF	1-1/4" x 1-1/4" x 3/16" Thick, Plain Steel Angle Iron	6.88	3.52
		For >100 To 250, Deduct	*-0.41*	
		For >250 To 500, Deduct	*-0.58*	
		For >500 To 1,000, Deduct	*-0.87*	
		For >1,000, Deduct	*-1.16*	
		For 304 Stainless Steel, Add	*6.24*	
		For 316 Stainless Steel, Add	*7.01*	
		For Aluminum, Add	*0.39*	
		For Galvanized Steel, Add	*1.36*	
		For High Strength Steel (HSS), Add	*1.38*	
05 12 23 00-0439	LF	1-1/2" x 1" x 3/16" Thick, Plain Steel Angle Iron	6.88	3.52
		For >100 To 250, Deduct	*-0.41*	
		For >250 To 500, Deduct	*-0.58*	
		For >500 To 1,000, Deduct	*-0.87*	
		For >1,000, Deduct	*-1.16*	
		For 304 Stainless Steel, Add	*6.24*	
		For 316 Stainless Steel, Add	*7.01*	
		For Aluminum, Add	*0.39*	
		For Galvanized Steel, Add	*1.36*	
		For High Strength Steel (HSS), Add	*1.38*	
05 12 23 00-0440	LF	1-1/2" x 1-1/2" x 3/16" Thick, Plain Steel Angle Iron	7.70	3.78
		For >100 To 250, Deduct	*-0.44*	
		For >250 To 500, Deduct	*-0.64*	
		For >500 To 1,000, Deduct	*-0.95*	
		For >1,000, Deduct	*-1.27*	
		For 304 Stainless Steel, Add	*7.61*	
		For 316 Stainless Steel, Add	*8.54*	
		For Aluminum, Add	*0.48*	
		For Galvanized Steel, Add	*1.66*	
		For High Strength Steel (HSS), Add	*1.54*	
05 12 23 00-0441	LF	1-3/4" x 1-3/4" x 3/16" Thick, Plain Steel Angle Iron	8.36	3.91
		For >100 To 250, Deduct	*-0.47*	
		For >250 To 500, Deduct	*-0.68*	
		For >500 To 1,000, Deduct	*-1.02*	
		For >1,000, Deduct	*-1.36*	
		For 304 Stainless Steel, Add	*8.98*	
		For 316 Stainless Steel, Add	*10.08*	
		For Aluminum, Add	*0.57*	
		For Galvanized Steel, Add	*1.95*	
		For High Strength Steel (HSS), Add	*1.67*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0442	LF	2" x 1-1/2" x 3/16" Thick, Plain Steel Angle Iron	8.36	3.91
		For >100 To 250, Deduct	*-0.47*	
		For >250 To 500, Deduct	*-0.68*	
		For >500 To 1,000, Deduct	*-1.02*	
		For >1,000, Deduct	*-1.36*	
		For 304 Stainless Steel, Add	*8.98*	
		For 316 Stainless Steel, Add	*10.08*	
		For Aluminum, Add	*0.57*	
		For Galvanized Steel, Add	*1.95*	
		For High Strength Steel (HSS), Add	*1.67*	
05 12 23 00-0443	LF	2" x 2" x 3/16" Thick, Plain Steel Angle Iron	9.02	4.05
		For >100 To 250, Deduct	*-0.50*	
		For >250 To 500, Deduct	*-0.72*	
		For >500 To 1,000, Deduct	*-1.08*	
		For >1,000, Deduct	*-1.44*	
		For 304 Stainless Steel, Add	*10.35*	
		For 316 Stainless Steel, Add	*11.62*	
		For Aluminum, Add	*0.65*	
		For Galvanized Steel, Add	*2.25*	
		For High Strength Steel (HSS), Add	*1.80*	
05 12 23 00-0444	LF	2-1/2" x 2" x 3/16" Thick, Plain Steel Angle Iron	9.87	4.33
		For >100 To 250, Deduct	*-0.54*	
		For >250 To 500, Deduct	*-0.78*	
		For >500 To 1,000, Deduct	*-1.17*	
		For >1,000, Deduct	*-1.57*	
		For 304 Stainless Steel, Add	*11.66*	
		For 316 Stainless Steel, Add	*13.09*	
		For Aluminum, Add	*0.74*	
		For Galvanized Steel, Add	*2.54*	
		For High Strength Steel (HSS), Add	*1.97*	
05 12 23 00-0445	LF	2-1/2" x 2-1/2" x 3/16" Thick, Plain Steel Angle Iron	10.76	4.64
		For >100 To 250, Deduct	*-0.58*	
		For >250 To 500, Deduct	*-0.85*	
		For >500 To 1,000, Deduct	*-1.27*	
		For >1,000, Deduct	*-1.70*	
		For 304 Stainless Steel, Add	*13.02*	
		For 316 Stainless Steel, Add	*14.62*	
		For Aluminum, Add	*0.82*	
		For Galvanized Steel, Add	*2.83*	
		For High Strength Steel (HSS), Add	*2.15*	
05 12 23 00-0446	LF	3" x 2" x 3/16" Thick, Plain Steel Angle Iron	10.75	4.64
		For >100 To 250, Deduct	*-0.58*	
		For >250 To 500, Deduct	*-0.85*	
		For >500 To 1,000, Deduct	*-1.27*	
		For >1,000, Deduct	*-1.69*	
		For 304 Stainless Steel, Add	*13.00*	
		For 316 Stainless Steel, Add	*14.59*	
		For Aluminum, Add	*0.82*	
		For Galvanized Steel, Add	*2.83*	
		For High Strength Steel (HSS), Add	*2.15*	
05 12 23 00-0447	LF	3" x 2-1/2" x 3/16" Thick, Plain Steel Angle Iron	11.88	5.12
		For >100 To 250, Deduct	*-0.64*	
		For >250 To 500, Deduct	*-0.94*	
		For >500 To 1,000, Deduct	*-1.40*	
		For >1,000, Deduct	*-1.87*	
		For 304 Stainless Steel, Add	*14.36*	
		For 316 Stainless Steel, Add	*16.13*	
		For Aluminum, Add	*0.91*	
		For Galvanized Steel, Add	*3.12*	
		For High Strength Steel (HSS), Add	*2.38*	
05 12 23 00-0448	LF	3" x 3" x 3/16" Thick, Plain Steel Angle Iron	12.99	5.61
		For >100 To 250, Deduct	*-0.70*	
		For >250 To 500, Deduct	*-1.02*	
		For >500 To 1,000, Deduct	*-1.54*	
		For >1,000, Deduct	*-2.05*	
		For 304 Stainless Steel, Add	*15.70*	
		For 316 Stainless Steel, Add	*17.63*	
		For Aluminum, Add	*0.99*	
		For Galvanized Steel, Add	*3.42*	
		For High Strength Steel (HSS), Add	*2.60*	

05 12 23 00-0449 1/4" Thick *(05 12 23 00-0423)*

05 12 23 00-0450	LF	1" x 1" x 1/4" Thick, Plain Steel Angle Iron	6.81	3.46
		For >100 To 250, Deduct	*-0.40*	
		For >250 To 500, Deduct	*-0.57*	
		For >500 To 1,000, Deduct	*-0.86*	
		For >1,000, Deduct	*-1.14*	
		For 304 Stainless Steel, Add	*6.24*	
		For 316 Stainless Steel, Add	*7.01*	
		For Aluminum, Add	*0.39*	
		For Galvanized Steel, Add	*1.36*	
		For High Strength Steel (HSS), Add	*1.36*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0451	LF	1-1/4" x 1-1/4" x 1/4" Thick, Plain Steel Angle Iron	7.78	3.72
		For >100 To 250, Deduct	*-0.44*	
		For >250 To 500, Deduct	*-0.64*	
		For >500 To 1,000, Deduct	*-0.96*	
		For >1,000, Deduct	*-1.27*	
		For 304 Stainless Steel, Add	*8.04*	
		For 316 Stainless Steel, Add	*9.02*	
		For Aluminum, Add	*0.51*	
		For Galvanized Steel, Add	*1.75*	
		For High Strength Steel (HSS), Add	*1.56*	
05 12 23 00-0452	LF	1-1/2" x 1" x 1/4" Thick, Plain Steel Angle Iron	7.78	3.72
		For >100 To 250, Deduct	*-0.44*	
		For >250 To 500, Deduct	*-0.64*	
		For >500 To 1,000, Deduct	*-0.96*	
		For >1,000, Deduct	*-1.27*	
		For 304 Stainless Steel, Add	*8.04*	
		For 316 Stainless Steel, Add	*9.02*	
		For Aluminum, Add	*0.51*	
		For Galvanized Steel, Add	*1.75*	
		For High Strength Steel (HSS), Add	*1.56*	
05 12 23 00-0453	LF	1-1/2" x 1-1/2" x 1/4" Thick, Plain Steel Angle Iron	8.75	3.98
		For >100 To 250, Deduct	*-0.48*	
		For >250 To 500, Deduct	*-0.70*	
		For >500 To 1,000, Deduct	*-1.05*	
		For >1,000, Deduct	*-1.41*	
		For 304 Stainless Steel, Add	*9.80*	
		For 316 Stainless Steel, Add	*11.01*	
		For Aluminum, Add	*0.62*	
		For Galvanized Steel, Add	*2.13*	
		For High Strength Steel (HSS), Add	*1.75*	
05 12 23 00-0454	LF	1-3/4" x 1-3/4" x 1/4" Thick, Plain Steel Angle Iron	9.61	4.11
		For >100 To 250, Deduct	*-0.51*	
		For >250 To 500, Deduct	*-0.76*	
		For >500 To 1,000, Deduct	*-1.13*	
		For >1,000, Deduct	*-1.51*	
		For 304 Stainless Steel, Add	*11.74*	
		For 316 Stainless Steel, Add	*13.18*	
		For Aluminum, Add	*0.74*	
		For Galvanized Steel, Add	*2.55*	
		For High Strength Steel (HSS), Add	*1.92*	
05 12 23 00-0455	LF	2" x 1" x 1/4" Thick, Plain Steel Angle Iron	8.52	3.86
		For >100 To 250, Deduct	*-0.47*	
		For >250 To 500, Deduct	*-0.68*	
		For >500 To 1,000, Deduct	*-1.02*	
		For >1,000, Deduct	*-1.36*	
		For 304 Stainless Steel, Add	*9.89*	
		For 316 Stainless Steel, Add	*11.10*	
		For Aluminum, Add	*0.62*	
		For Galvanized Steel, Add	*2.15*	
		For High Strength Steel (HSS), Add	*1.70*	
05 12 23 00-0456	LF	2" x 1-1/2" x 1/4" Thick, Plain Steel Angle Iron	9.60	4.11
		For >100 To 250, Deduct	*-0.51*	
		For >250 To 500, Deduct	*-0.75*	
		For >500 To 1,000, Deduct	*-1.13*	
		For >1,000, Deduct	*-1.51*	
		For 304 Stainless Steel, Add	*11.71*	
		For 316 Stainless Steel, Add	*13.15*	
		For Aluminum, Add	*0.74*	
		For Galvanized Steel, Add	*2.55*	
		For High Strength Steel (HSS), Add	*1.92*	
05 12 23 00-0457	LF	2" x 2" x 1/4" Thick, Plain Steel Angle Iron	10.39	4.25
		For >100 To 250, Deduct	*-0.54*	
		For >250 To 500, Deduct	*-0.80*	
		For >500 To 1,000, Deduct	*-1.20*	
		For >1,000, Deduct	*-1.61*	
		For 304 Stainless Steel, Add	*13.48*	
		For 316 Stainless Steel, Add	*15.14*	
		For Aluminum, Add	*0.85*	
		For Galvanized Steel, Add	*2.93*	
		For High Strength Steel (HSS), Add	*2.08*	
05 12 23 00-0458	LF	2-1/2" x 2" x 1/4" Thick, Plain Steel Angle Iron	11.65	4.70
		For >100 To 250, Deduct	*-0.60*	
		For >250 To 500, Deduct	*-0.90*	
		For >500 To 1,000, Deduct	*-1.34*	
		For >1,000, Deduct	*-1.79*	
		For 304 Stainless Steel, Add	*15.33*	
		For 316 Stainless Steel, Add	*17.22*	
		For Aluminum, Add	*0.97*	
		For Galvanized Steel, Add	*3.34*	
		For High Strength Steel (HSS), Add	*2.33*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0459	LF	2-1/2" x 2-1/2" x 1/4" Thick, Plain Steel Angle Iron	12.96	5.15
		For >100 To 250, Deduct	*-0.67*	
		For >250 To 500, Deduct	*-0.99*	
		For >500 To 1,000, Deduct	*-1.49*	
		For >1,000, Deduct	*-1.98*	
		For 304 Stainless Steel, Add	*17.33*	
		For 316 Stainless Steel, Add	*19.46*	
		For Aluminum, Add	*1.09*	
		For Galvanized Steel, Add	*3.77*	
		For High Strength Steel (HSS), Add	*2.59*	
05 12 23 00-0460	LF	3" x 2" x 1/4" Thick, Plain Steel Angle Iron	12.96	5.15
		For >100 To 250, Deduct	*-0.67*	
		For >250 To 500, Deduct	*-0.99*	
		For >500 To 1,000, Deduct	*-1.49*	
		For >1,000, Deduct	*-1.98*	
		For 304 Stainless Steel, Add	*17.33*	
		For 316 Stainless Steel, Add	*19.46*	
		For Aluminum, Add	*1.09*	
		For Galvanized Steel, Add	*3.77*	
		For High Strength Steel (HSS), Add	*2.59*	
05 12 23 00-0461	LF	3" x 2-1/2" x 1/4" Thick, Plain Steel Angle Iron	14.32	5.72
		For >100 To 250, Deduct	*-0.74*	
		For >250 To 500, Deduct	*-1.10*	
		For >500 To 1,000, Deduct	*-1.65*	
		For >1,000, Deduct	*-2.20*	
		For 304 Stainless Steel, Add	*19.07*	
		For 316 Stainless Steel, Add	*21.41*	
		For Aluminum, Add	*1.20*	
		For Galvanized Steel, Add	*4.15*	
		For High Strength Steel (HSS), Add	*2.86*	
05 12 23 00-0462	LF	3" x 3" x 1/4" Thick, Plain Steel Angle Iron	15.65	6.29
		For >100 To 250, Deduct	*-0.81*	
		For >250 To 500, Deduct	*-1.20*	
		For >500 To 1,000, Deduct	*-1.80*	
		For >1,000, Deduct	*-2.40*	
		For 304 Stainless Steel, Add	*20.69*	
		For 316 Stainless Steel, Add	*23.23*	
		For Aluminum, Add	*1.31*	
		For Galvanized Steel, Add	*4.50*	
		For High Strength Steel (HSS), Add	*3.13*	
05 12 23 00-0463	LF	3-1/2" x 3" x 1/4" Thick, Plain Steel Angle Iron	17.01	6.76
		For >100 To 250, Deduct	*-0.88*	
		For >250 To 500, Deduct	*-1.30*	
		For >500 To 1,000, Deduct	*-1.95*	
		For >1,000, Deduct	*-2.60*	
		For 304 Stainless Steel, Add	*22.80*	
		For 316 Stainless Steel, Add	*25.60*	
		For Aluminum, Add	*1.44*	
		For Galvanized Steel, Add	*4.96*	
		For High Strength Steel (HSS), Add	*3.40*	
05 12 23 00-0464	LF	3-1/2" x 3-1/2" x 1/4" Thick, Plain Steel Angle Iron	18.03	0.70
		For >100 To 250, Deduct	*-0.92*	
		For >250 To 500, Deduct	*-1.37*	
		For >500 To 1,000, Deduct	*-2.06*	
		For >1,000, Deduct	*-2.74*	
		For 304 Stainless Steel, Add	*24.57*	
		For 316 Stainless Steel, Add	*27.58*	
		For Aluminum, Add	*1.55*	
		For Galvanized Steel, Add	*5.34*	
		For High Strength Steel (HSS), Add	*3.61*	
05 12 23 00-0465	LF	4" x 3" x 1/4" Thick, Plain Steel Angle Iron	18.03	7.06
		For >100 To 250, Deduct	*-0.92*	
		For >250 To 500, Deduct	*-1.37*	
		For >500 To 1,000, Deduct	*-2.06*	
		For >1,000, Deduct	*-2.74*	
		For 304 Stainless Steel, Add	*24.57*	
		For 316 Stainless Steel, Add	*27.58*	
		For Aluminum, Add	*1.55*	
		For Galvanized Steel, Add	*5.34*	
		For High Strength Steel (HSS), Add	*3.61*	
05 12 23 00-0466	LF	4" x 3-1/2" x 1/4" Thick, Plain Steel Angle Iron	19.00	7.36
		For >100 To 250, Deduct	*-0.97*	
		For >250 To 500, Deduct	*-1.44*	
		For >500 To 1,000, Deduct	*-2.16*	
		For >1,000, Deduct	*-2.88*	
		For 304 Stainless Steel, Add	*26.19*	
		For 316 Stainless Steel, Add	*29.41*	
		For Aluminum, Add	*1.65*	
		For Galvanized Steel, Add	*5.70*	
		For High Strength Steel (HSS), Add	*3.80*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0467	LF	4" x 4" x 1/4" Thick, Plain Steel Angle Iron	20.04	7.67
		For >100 To 250, Deduct	*-1.01*	
		For >250 To 500, Deduct	*-1.51*	
		For >500 To 1,000, Deduct	*-2.27*	
		For >1,000, Deduct	*-3.03*	
		For 304 Stainless Steel, Add	*27.96*	
		For 316 Stainless Steel, Add	*31.39*	
		For Aluminum, Add	*1.77*	
		For Galvanized Steel, Add	*6.08*	
		For High Strength Steel (HSS), Add	*4.01*	
05 12 23 00-0468	LF	5" x 3" x 1/4" Thick, Plain Steel Angle Iron	20.04	7.67
		For >100 To 250, Deduct	*-1.01*	
		For >250 To 500, Deduct	*-1.51*	
		For >500 To 1,000, Deduct	*-2.27*	
		For >1,000, Deduct	*-3.03*	
		For 304 Stainless Steel, Add	*27.96*	
		For 316 Stainless Steel, Add	*31.39*	
		For Aluminum, Add	*1.77*	
		For Galvanized Steel, Add	*6.08*	
		For High Strength Steel (HSS), Add	*4.01*	
05 12 23 00-0469	LF	5" x 3-1/2" x 1/4" Thick, Plain Steel Angle Iron	21.16	8.08
		For >100 To 250, Deduct	*-1.07*	
		For >250 To 500, Deduct	*-1.60*	
		For >500 To 1,000, Deduct	*-2.40*	
		For >1,000, Deduct	*-3.19*	
		For 304 Stainless Steel, Add	*29.58*	
		For 316 Stainless Steel, Add	*33.22*	
		For Aluminum, Add	*1.87*	
		For Galvanized Steel, Add	*6.44*	
		For High Strength Steel (HSS), Add	*4.23*	

05 12 23 00-0470 5/16" Thick *(05 12 23 00-0423)*

05 12 23 00-0471	LF	2-1/2" x 2" x 5/16" Thick, Plain Steel Angle Iron	13.98	5.47
		For >100 To 250, Deduct	*-0.71*	
		For >250 To 500, Deduct	*-1.06*	
		For >500 To 1,000, Deduct	*-1.60*	
		For >1,000, Deduct	*-2.13*	
		For 304 Stainless Steel, Add	*19.07*	
		For 316 Stainless Steel, Add	*21.41*	
		For Aluminum, Add	*1.20*	
		For Galvanized Steel, Add	*4.15*	
		For High Strength Steel (HSS), Add	*2.80*	
05 12 23 00-0472	LF	2-1/2" x 2-1/2" x 5/16" Thick, Plain Steel Angle Iron	15.15	5.79
		For >100 To 250, Deduct	*-0.76*	
		For >250 To 500, Deduct	*-1.14*	
		For >500 To 1,000, Deduct	*-1.72*	
		For >1,000, Deduct	*-2.29*	
		For 304 Stainless Steel, Add	*21.18*	
		For 316 Stainless Steel, Add	*23.78*	
		For Aluminum, Add	*1.34*	
		For Galvanized Steel, Add	*4.61*	
		For High Strength Steel (HSS), Add	*3.03*	
05 12 23 00-0473	LF	3" x 2" x 5/16" Thick, Plain Steel Angle Iron	15.15	5.79
		For >100 To 250, Deduct	*-0.76*	
		For >250 To 500, Deduct	*-1.14*	
		For >500 To 1,000, Deduct	*-1.72*	
		For >1,000, Deduct	*-2.29*	
		For 304 Stainless Steel, Add	*21.18*	
		For 316 Stainless Steel, Add	*23.78*	
		For Aluminum, Add	*1.34*	
		For Galvanized Steel, Add	*4.61*	
		For High Strength Steel (HSS), Add	*3.03*	
05 12 23 00-0474	LF	3" x 2-1/2" x 5/16" Thick, Plain Steel Angle Iron	16.79	6.35
		For >100 To 250, Deduct	*-0.84*	
		For >250 To 500, Deduct	*-1.26*	
		For >500 To 1,000, Deduct	*-1.89*	
		For >1,000, Deduct	*-2.53*	
		For 304 Stainless Steel, Add	*23.71*	
		For 316 Stainless Steel, Add	*26.62*	
		For Aluminum, Add	*1.50*	
		For Galvanized Steel, Add	*5.16*	
		For High Strength Steel (HSS), Add	*3.36*	
05 12 23 00-0475	LF	3" x 3" x 5/16" Thick, Plain Steel Angle Iron	18.26	6.91
		For >100 To 250, Deduct	*-0.92*	
		For >250 To 500, Deduct	*-1.37*	
		For >500 To 1,000, Deduct	*-2.06*	
		For >1,000, Deduct	*-2.75*	
		For 304 Stainless Steel, Add	*25.82*	
		For 316 Stainless Steel, Add	*28.99*	
		For Aluminum, Add	*1.63*	
		For Galvanized Steel, Add	*5.62*	
		For High Strength Steel (HSS), Add	*3.65*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0476	LF	3-1/2" x 3" x 5/16" Thick, Plain Steel Angle Iron	19.48	7.26
		For >100 To 250, Deduct	*-0.97*	
		For >250 To 500, Deduct	*-1.46*	
		For >500 To 1,000, Deduct	*-2.19*	
		For >1,000, Deduct	*-2.92*	
		For 304 Stainless Steel, Add	*27.96*	
		For 316 Stainless Steel, Add	*31.39*	
		For Aluminum, Add	*1.77*	
		For Galvanized Steel, Add	*6.08*	
		For High Strength Steel (HSS), Add	*3.90*	
05 12 23 00-0477	LF	3-1/2" x 3-1/2" x 5/16" Thick, Plain Steel Angle Iron	20.82	7.61
		For >100 To 250, Deduct	*-1.03*	
		For >250 To 500, Deduct	*-1.55*	
		For >500 To 1,000, Deduct	*-2.32*	
		For >1,000, Deduct	*-3.10*	
		For 304 Stainless Steel, Add	*30.41*	
		For 316 Stainless Steel, Add	*34.14*	
		For Aluminum, Add	*1.92*	
		For Galvanized Steel, Add	*6.62*	
		For High Strength Steel (HSS), Add	*4.16*	
05 12 23 00-0478	LF	4" x 3" x 5/16" Thick, Plain Steel Angle Iron	20.82	7.61
		For >100 To 250, Deduct	*-1.03*	
		For >250 To 500, Deduct	*-1.55*	
		For >500 To 1,000, Deduct	*-2.32*	
		For >1,000, Deduct	*-3.10*	
		For 304 Stainless Steel, Add	*30.41*	
		For 316 Stainless Steel, Add	*34.14*	
		For Aluminum, Add	*1.92*	
		For Galvanized Steel, Add	*6.62*	
		For High Strength Steel (HSS), Add	*4.16*	
05 12 23 00-0479	LF	4" x 3-1/2" x 5/16" Thick, Plain Steel Angle Iron	22.14	8.05
		For >100 To 250, Deduct	*-1.09*	
		For >250 To 500, Deduct	*-1.64*	
		For >500 To 1,000, Deduct	*-2.47*	
		For >1,000, Deduct	*-3.29*	
		For 304 Stainless Steel, Add	*32.52*	
		For 316 Stainless Steel, Add	*36.51*	
		For Aluminum, Add	*2.05*	
		For Galvanized Steel, Add	*7.07*	
		For High Strength Steel (HSS), Add	*4.43*	
05 12 23 00-0480	LF	4" x 4" x 5/16" Thick, Plain Steel Angle Iron	23.40	8.41
		For >100 To 250, Deduct	*-1.15*	
		For >250 To 500, Deduct	*-1.73*	
		For >500 To 1,000, Deduct	*-2.60*	
		For >1,000, Deduct	*-3.46*	
		For 304 Stainless Steel, Add	*34.74*	
		For 316 Stainless Steel, Add	*39.01*	
		For Aluminum, Add	*2.19*	
		For Galvanized Steel, Add	*7.56*	
		For High Strength Steel (HSS), Add	*4.68*	
05 12 23 00-0481	LF	5" x 3" x 5/16" Thick, Plain Steel Angle Iron	23.40	8.41
		For >100 To 250, Deduct	*-1.15*	
		For >250 To 500, Deduct	*-1.73*	
		For >500 To 1,000, Deduct	*-2.60*	
		For >1,000, Deduct	*-3.46*	
		For 304 Stainless Steel, Add	*34.74*	
		For 316 Stainless Steel, Add	*39.01*	
		For Aluminum, Add	*2.19*	
		For Galvanized Steel, Add	*7.56*	
		For High Strength Steel (HSS), Add	*4.68*	
05 12 23 00-0482	LF	5" x 3-1/2" x 5/16" Thick, Plain Steel Angle Iron	24.58	8.76
		For >100 To 250, Deduct	*-1.20*	
		For >250 To 500, Deduct	*-1.81*	
		For >500 To 1,000, Deduct	*-2.72*	
		For >1,000, Deduct	*-3.63*	
		For 304 Stainless Steel, Add	*36.77*	
		For 316 Stainless Steel, Add	*41.28*	
		For Aluminum, Add	*2.32*	
		For Galvanized Steel, Add	*8.00*	
		For High Strength Steel (HSS), Add	*4.92*	
05 12 23 00-0483	LF	5" x 5" x 5/16" Thick, Plain Steel Angle Iron	27.48	9.13
		For >100 To 250, Deduct	*-1.30*	
		For >250 To 500, Deduct	*-1.98*	
		For >500 To 1,000, Deduct	*-2.97*	
		For >1,000, Deduct	*-3.97*	
		For 304 Stainless Steel, Add	*43.63*	
		For 316 Stainless Steel, Add	*48.99*	
		For Aluminum, Add	*2.76*	
		For Galvanized Steel, Add	*9.49*	
		For High Strength Steel (HSS), Add	*5.50*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0484	LF	6" x 3-1/2" x 5/16" Thick, Plain Steel Angle Iron	27.22	9.51
		For >100 To 250, Deduct	*-1.32*	
		For >250 To 500, Deduct	*-2.00*	
		For >500 To 1,000, Deduct	*-2.99*	
		For >1,000, Deduct	*-3.99*	
		For 304 Stainless Steel, Add	*41.41*	
		For 316 Stainless Steel, Add	*46.50*	
		For Aluminum, Add	*2.62*	
		For Galvanized Steel, Add	*9.01*	
		For High Strength Steel (HSS), Add	*5.44*	
05 12 23 00-0485		3/8" Thick *(05 12 23 00-0423)*		
05 12 23 00-0486	LF	3" x 2" x 3/8" Thick, Plain Steel Angle Iron	16.83	6.06
		For >100 To 250, Deduct	*-0.82*	
		For >250 To 500, Deduct	*-1.25*	
		For >500 To 1,000, Deduct	*-1.87*	
		For >1,000, Deduct	*-2.49*	
		For 304 Stainless Steel, Add	*24.94*	
		For 316 Stainless Steel, Add	*28.00*	
		For Aluminum, Add	*1.58*	
		For Galvanized Steel, Add	*5.43*	
		For High Strength Steel (HSS), Add	*3.37*	
05 12 23 00-0487	LF	3" x 2-1/2" x 3/8" Thick, Plain Steel Angle Iron	18.57	6.56
		For >100 To 250, Deduct	*-0.90*	
		For >250 To 500, Deduct	*-1.37*	
		For >500 To 1,000, Deduct	*-2.05*	
		For >1,000, Deduct	*-2.73*	
		For 304 Stainless Steel, Add	*27.96*	
		For 316 Stainless Steel, Add	*31.39*	
		For Aluminum, Add	*1.77*	
		For Galvanized Steel, Add	*6.08*	
		For High Strength Steel (HSS), Add	*3.71*	
05 12 23 00-0488	LF	3" x 3" x 3/8" Thick, Plain Steel Angle Iron	20.10	7.08
		For >100 To 250, Deduct	*-0.97*	
		For >250 To 500, Deduct	*-1.48*	
		For >500 To 1,000, Deduct	*-2.21*	
		For >1,000, Deduct	*-2.95*	
		For 304 Stainless Steel, Add	*30.41*	
		For 316 Stainless Steel, Add	*34.14*	
		For Aluminum, Add	*1.92*	
		For Galvanized Steel, Add	*6.62*	
		For High Strength Steel (HSS), Add	*4.02*	
05 12 23 00-0489	LF	3-1/2" x 3" x 3/8" Thick, Plain Steel Angle Iron	21.44	7.27
		For >100 To 250, Deduct	*-1.02*	
		For >250 To 500, Deduct	*-1.56*	
		For >500 To 1,000, Deduct	*-2.34*	
		For >1,000, Deduct	*-3.11*	
		For 304 Stainless Steel, Add	*33.46*	
		For 316 Stainless Steel, Add	*37.57*	
		For Aluminum, Add	*2.11*	
		For Galvanized Steel, Add	*7.28*	
		For High Strength Steel (HSS), Add	*4.29*	
05 12 23 00-0490	LF	3-1/2" x 3-1/2" x 3/8" Thick, Plain Steel Angle Iron	22.82	7.66
		For >100 To 250, Deduct	*-1.08*	
		For >250 To 500, Deduct	*-1.65*	
		For >500 To 1,000, Deduct	*-2.48*	
		For >1,000, Deduct	*-3.30*	
		For 304 Stainless Steel, Add	*35.91*	
		For 316 Stainless Steel, Add	*40.32*	
		For Aluminum, Add	*2.27*	
		For Galvanized Steel, Add	*7.81*	
		For High Strength Steel (HSS), Add	*4.56*	
05 12 23 00-0491	LF	4" x 3" x 3/8" Thick, Plain Steel Angle Iron	22.82	7.66
		For >100 To 250, Deduct	*-1.08*	
		For >250 To 500, Deduct	*-1.65*	
		For >500 To 1,000, Deduct	*-2.48*	
		For >1,000, Deduct	*-3.30*	
		For 304 Stainless Steel, Add	*35.91*	
		For 316 Stainless Steel, Add	*40.32*	
		For Aluminum, Add	*2.27*	
		For Galvanized Steel, Add	*7.81*	
		For High Strength Steel (HSS), Add	*4.56*	
05 12 23 00-0492	LF	4" x 3-1/2" x 3/8" Thick, Plain Steel Angle Iron	24.62	8.36
		For >100 To 250, Deduct	*-1.17*	
		For >250 To 500, Deduct	*-1.79*	
		For >500 To 1,000, Deduct	*-2.68*	
		For >1,000, Deduct	*-3.58*	
		For 304 Stainless Steel, Add	*38.45*	
		For 316 Stainless Steel, Add	*43.17*	
		For Aluminum, Add	*2.43*	
		For Galvanized Steel, Add	*8.36*	
		For High Strength Steel (HSS), Add	*4.92*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0493	LF	4" x 4" x 3/8" Thick, Plain Steel Angle Iron	25.99	8.60
		For >100 To 250, Deduct	*-1.22*	
		For >250 To 500, Deduct	*-1.87*	
		For >500 To 1,000, Deduct	*-2.81*	
		For >1,000, Deduct	*-3.75*	
		For 304 Stainless Steel, Add	*41.41*	
		For 316 Stainless Steel, Add	*46.50*	
		For Aluminum, Add	*2.62*	
		For Galvanized Steel, Add	*9.01*	
		For High Strength Steel (HSS), Add	*5.20*	
05 12 23 00-0494	LF	5" x 3" x 3/8" Thick, Plain Steel Angle Iron	26.45	8.94
		For >100 To 250, Deduct	*-1.26*	
		For >250 To 500, Deduct	*-1.92*	
		For >500 To 1,000, Deduct	*-2.88*	
		For >1,000, Deduct	*-3.84*	
		For 304 Stainless Steel, Add	*41.41*	
		For 316 Stainless Steel, Add	*46.50*	
		For Aluminum, Add	*2.62*	
		For Galvanized Steel, Add	*9.01*	
		For High Strength Steel (HSS), Add	*5.29*	
05 12 23 00-0495	LF	5" x 3-1/2" x 3/8" Thick, Plain Steel Angle Iron	28.27	9.63
		For >100 To 250, Deduct	*-1.35*	
		For >250 To 500, Deduct	*-2.06*	
		For >500 To 1,000, Deduct	*-3.08*	
		For >1,000, Deduct	*-4.11*	
		For 304 Stainless Steel, Add	*43.95*	
		For 316 Stainless Steel, Add	*49.34*	
		For Aluminum, Add	*2.78*	
		For Galvanized Steel, Add	*9.56*	
		For High Strength Steel (HSS), Add	*5.65*	
05 12 23 00-0496	LF	5" x 5" x 3/8" Thick, Plain Steel Angle Iron	33.24	11.23
		For >100 To 250, Deduct	*-1.58*	
		For >250 To 500, Deduct	*-2.41*	
		For >500 To 1,000, Deduct	*-3.62*	
		For >1,000, Deduct	*-4.82*	
		For 304 Stainless Steel, Add	*52.10*	
		For 316 Stainless Steel, Add	*58.50*	
		For Aluminum, Add	*3.29*	
		For Galvanized Steel, Add	*11.33*	
		For High Strength Steel (HSS), Add	*6.65*	
05 12 23 00-0497	LF	6" x 3-1/2" x 3/8" Thick, Plain Steel Angle Iron	31.25	10.44
		For >100 To 250, Deduct	*-1.48*	
		For >250 To 500, Deduct	*-2.26*	
		For >500 To 1,000, Deduct	*-3.39*	
		For >1,000, Deduct	*-4.52*	
		For 304 Stainless Steel, Add	*49.42*	
		For 316 Stainless Steel, Add	*55.49*	
		For Aluminum, Add	*3.12*	
		For Galvanized Steel, Add	*10.75*	
		For High Strength Steel (HSS), Add	*6.25*	
05 12 23 00-0498	LF	6" x 4" x 3/8" Thick, Plain Steel Angle Iron	33.24	11.23
		For >100 To 250, Deduct	*-1.58*	
		For >250 To 500, Deduct	*-2.41*	
		For >500 To 1,000, Deduct	*-3.62*	
		For >1,000, Deduct	*-4.82*	
		For 304 Stainless Steel, Add	*52.10*	
		For 316 Stainless Steel, Add	*58.50*	
		For Aluminum, Add	*3.29*	
		For Galvanized Steel, Add	*11.33*	
		For High Strength Steel (HSS), Add	*6.65*	
05 12 23 00-0499	LF	6" x 6" x 3/8" Thick, Plain Steel Angle Iron	40.09	13.47
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-2.90*	
		For >500 To 1,000, Deduct	*-4.35*	
		For >1,000, Deduct	*-5.80*	
		For 304 Stainless Steel, Add	*63.10*	
		For 316 Stainless Steel, Add	*70.85*	
		For Aluminum, Add	*3.99*	
		For Galvanized Steel, Add	*13.73*	
		For High Strength Steel (HSS), Add	*8.02*	
05 12 23 00-0500	LF	7" x 4" x 3/8" Thick, Plain Steel Angle Iron	36.68	12.34
		For >100 To 250, Deduct	*-1.74*	
		For >250 To 500, Deduct	*-2.66*	
		For >500 To 1,000, Deduct	*-3.99*	
		For >1,000, Deduct	*-5.32*	
		For 304 Stainless Steel, Add	*57.60*	
		For 316 Stainless Steel, Add	*64.67*	
		For Aluminum, Add	*3.64*	
		For Galvanized Steel, Add	*12.53*	
		For High Strength Steel (HSS), Add	*7.34*	

05 12 23 00-0501 1/2" Thick *(05 12 23 00-0423)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0502	LF	3" x 3" x 1/2" Thick, Plain Steel Angle Iron	23.60	7.23
		For >100 To 250, Deduct	*-1.07*	
		For >250 To 500, Deduct	*-1.66*	
		For >500 To 1,000, Deduct	*-2.49*	
		For >1,000, Deduct	*-3.32*	
		For 304 Stainless Steel, Add	*39.81*	
		For 316 Stainless Steel, Add	*44.70*	
		For Aluminum, Add	*2.51*	
		For Galvanized Steel, Add	*8.66*	
		For High Strength Steel (HSS), Add	*4.72*	
05 12 23 00-0503	LF	4" x 3" x 1/2" Thick, Plain Steel Angle Iron	27.88	8.54
		For >100 To 250, Deduct	*-1.27*	
		For >250 To 500, Deduct	*-1.96*	
		For >500 To 1,000, Deduct	*-2.94*	
		For >1,000, Deduct	*-3.93*	
		For 304 Stainless Steel, Add	*47.03*	
		For 316 Stainless Steel, Add	*52.80*	
		For Aluminum, Add	*2.97*	
		For Galvanized Steel, Add	*10.23*	
		For High Strength Steel (HSS), Add	*5.58*	
05 12 23 00-0504	LF	4" x 3-1/2" x 1/2" Thick, Plain Steel Angle Iron	29.88	9.15
		For >100 To 250, Deduct	*-1.36*	
		For >250 To 500, Deduct	*-2.10*	
		For >500 To 1,000, Deduct	*-3.16*	
		For >1,000, Deduct	*-4.21*	
		For 304 Stainless Steel, Add	*50.39*	
		For 316 Stainless Steel, Add	*56.58*	
		For Aluminum, Add	*3.18*	
		For Galvanized Steel, Add	*10.96*	
		For High Strength Steel (HSS), Add	*5.98*	
05 12 23 00-0505	LF	4" x 4" x 1/2" Thick, Plain Steel Angle Iron	32.15	9.85
		For >100 To 250, Deduct	*-1.46*	
		For >250 To 500, Deduct	*-2.26*	
		For >500 To 1,000, Deduct	*-3.40*	
		For >1,000, Deduct	*-4.53*	
		For 304 Stainless Steel, Add	*54.21*	
		For 316 Stainless Steel, Add	*60.86*	
		For Aluminum, Add	*3.42*	
		For Galvanized Steel, Add	*11.79*	
		For High Strength Steel (HSS), Add	*6.43*	
05 12 23 00-0506	LF	5" x 3" x 1/2" Thick, Plain Steel Angle Iron	32.15	9.85
		For >100 To 250, Deduct	*-1.46*	
		For >250 To 500, Deduct	*-2.26*	
		For >500 To 1,000, Deduct	*-3.40*	
		For >1,000, Deduct	*-4.53*	
		For 304 Stainless Steel, Add	*54.21*	
		For 316 Stainless Steel, Add	*60.86*	
		For Aluminum, Add	*3.42*	
		For Galvanized Steel, Add	*11.79*	
		For High Strength Steel (HSS), Add	*6.43*	
05 12 23 00-0507	LF	5" x 3-1/2" x 1/2" Thick, Plain Steel Angle Iron	34.15	10.46
		For >100 To 250, Deduct	*-1.55*	
		For >250 To 500, Deduct	*-2.40*	
		For >500 To 1,000, Deduct	*-3.61*	
		For >1,000, Deduct	*-4.81*	
		For 304 Stainless Steel, Add	*57.60*	
		For 316 Stainless Steel, Add	*64.67*	
		For Aluminum, Add	*3.64*	
		For Galvanized Steel, Add	*12.53*	
		For High Strength Steel (HSS), Add	*6.83*	
05 12 23 00-0508	LF	5" x 5" x 1/2" Thick, Plain Steel Angle Iron	40.68	12.45
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.86*	
		For >500 To 1,000, Deduct	*-4.30*	
		For >1,000, Deduct	*-5.73*	
		For 304 Stainless Steel, Add	*68.60*	
		For 316 Stainless Steel, Add	*77.02*	
		For Aluminum, Add	*4.33*	
		For Galvanized Steel, Add	*14.92*	
		For High Strength Steel (HSS), Add	*8.14*	
05 12 23 00-0509	LF	6" x 4" x 1/2" Thick, Plain Steel Angle Iron	40.68	12.45
		For >100 To 250, Deduct	*-1.85*	
		For >250 To 500, Deduct	*-2.86*	
		For >500 To 1,000, Deduct	*-4.30*	
		For >1,000, Deduct	*-5.73*	
		For 304 Stainless Steel, Add	*68.60*	
		For 316 Stainless Steel, Add	*77.02*	
		For Aluminum, Add	*4.33*	
		For Galvanized Steel, Add	*14.92*	
		For High Strength Steel (HSS), Add	*8.14*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0510	LF	6" x 6" x 1/2" Thick, Plain Steel Angle Iron	49.22	15.07
		For >100 To 250, Deduct	*-2.24*	
		For >250 To 500, Deduct	*-3.47*	
		For >500 To 1,000, Deduct	*-5.20*	
		For >1,000, Deduct	*-6.93*	
		For 304 Stainless Steel, Add	*82.99*	
		For 316 Stainless Steel, Add	*93.18*	
		For Aluminum, Add	*5.24*	
		For Galvanized Steel, Add	*18.05*	
		For High Strength Steel (HSS), Add	*9.84*	
05 12 23 00-0511	LF	7" x 4" x 1/2" Thick, Plain Steel Angle Iron	44.93	13.76
		For >100 To 250, Deduct	*-2.04*	
		For >250 To 500, Deduct	*-3.16*	
		For >500 To 1,000, Deduct	*-4.75*	
		For >1,000, Deduct	*-6.33*	
		For 304 Stainless Steel, Add	*75.78*	
		For 316 Stainless Steel, Add	*85.09*	
		For Aluminum, Add	*4.79*	
		For Galvanized Steel, Add	*16.49*	
		For High Strength Steel (HSS), Add	*8.99*	
05 12 23 00-0512	LF	8" x 4" x 1/2" Thick, Plain Steel Angle Iron	49.22	15.07
		For >100 To 250, Deduct	*-2.24*	
		For >250 To 500, Deduct	*-3.47*	
		For >500 To 1,000, Deduct	*-5.20*	
		For >1,000, Deduct	*-6.93*	
		For 304 Stainless Steel, Add	*82.99*	
		For 316 Stainless Steel, Add	*93.18*	
		For Aluminum, Add	*5.24*	
		For Galvanized Steel, Add	*18.05*	
		For High Strength Steel (HSS), Add	*9.84*	
05 12 23 00-0513	LF	8" x 6" x 1/2" Thick, Plain Steel Angle Iron	57.76	17.69
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-4.07*	
		For >500 To 1,000, Deduct	*-6.10*	
		For >1,000, Deduct	*-8.13*	
		For 304 Stainless Steel, Add	*97.41*	
		For 316 Stainless Steel, Add	*109.38*	
		For Aluminum, Add	*6.15*	
		For Galvanized Steel, Add	*21.19*	
		For High Strength Steel (HSS), Add	*11.55*	
05 12 23 00-0514	LF	8" x 8" x 1/2" Thick, Plain Steel Angle Iron	66.28	20.30
		For >100 To 250, Deduct	*-3.01*	
		For >250 To 500, Deduct	*-4.67*	
		For >500 To 1,000, Deduct	*-7.00*	
		For >1,000, Deduct	*-9.33*	
		For 304 Stainless Steel, Add	*111.78*	
		For 316 Stainless Steel, Add	*125.50*	
		For Aluminum, Add	*7.06*	
		For Galvanized Steel, Add	*24.32*	
		For High Strength Steel (HSS), Add	*13.26*	
05 12 23 00-0515		5/8" Thick *(05 12 23 00-0423)*		
05 12 23 00-0516	LF	4" x 4" x 5/8" Thick, Plain Steel Angle Iron	38.37	11.29
		For >100 To 250, Deduct	*-1.71*	
		For >250 To 500, Deduct	*-2.67*	
		For >500 To 1,000, Deduct	*-4.01*	
		For >1,000, Deduct	*-5.34*	
		For 316 Stainless Steel, Add	*74.66*	
		For Aluminum, Add	*4.20*	
		For Galvanized Steel, Add	*14.46*	
		For High Strength Steel (HSS), Add	*7.67*	
05 12 23 00-0517	LF	5" x 3-1/2" x 5/8" Thick, Plain Steel Angle Iron	41.07	12.07
		For >100 To 250, Deduct	*-1.83*	
		For >250 To 500, Deduct	*-2.86*	
		For >500 To 1,000, Deduct	*-4.29*	
		For >1,000, Deduct	*-5.72*	
		For 316 Stainless Steel, Add	*79.90*	
		For Aluminum, Add	*4.49*	
		For Galvanized Steel, Add	*15.48*	
		For High Strength Steel (HSS), Add	*8.21*	
05 12 23 00-0518	LF	5" x 5" x 5/8" Thick, Plain Steel Angle Iron	48.87	14.38
		For >100 To 250, Deduct	*-2.18*	
		For >250 To 500, Deduct	*-3.40*	
		For >500 To 1,000, Deduct	*-5.10*	
		For >1,000, Deduct	*-6.80*	
		For 316 Stainless Steel, Add	*95.07*	
		For Aluminum, Add	*5.35*	
		For Galvanized Steel, Add	*18.42*	
		For High Strength Steel (HSS), Add	*9.77*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0519	LF	6" x 4" x 5/8" Thick, Plain Steel Angle Iron	48.87	14.38
		For >100 To 250, Deduct	*-2.18*	
		For >250 To 500, Deduct	*-3.40*	
		For >500 To 1,000, Deduct	*-5.10*	
		For >1,000, Deduct	*-6.80*	
		For 316 Stainless Steel, Add	*95.07*	
		For Aluminum, Add	*5.35*	
		For Galvanized Steel, Add	*18.42*	
		For High Strength Steel (HSS), Add	*9.77*	
05 12 23 00-0520	LF	6" x 6" x 5/8" Thick, Plain Steel Angle Iron	59.15	17.39
		For >100 To 250, Deduct	*-2.64*	
		For >250 To 500, Deduct	*-4.12*	
		For >500 To 1,000, Deduct	*-6.18*	
		For >1,000, Deduct	*-8.23*	
		For 316 Stainless Steel, Add	*115.07*	
		For Aluminum, Add	*6.47*	
		For Galvanized Steel, Add	*22.30*	
		For High Strength Steel (HSS), Add	*11.83*	
05 12 23 00-0521	LF	7" x 4" x 5/8" Thick, Plain Steel Angle Iron	54.01	15.88
		For >100 To 250, Deduct	*-2.41*	
		For >250 To 500, Deduct	*-3.76*	
		For >500 To 1,000, Deduct	*-5.64*	
		For >1,000, Deduct	*-7.52*	
		For 316 Stainless Steel, Add	*105.09*	
		For Aluminum, Add	*5.91*	
		For Galvanized Steel, Add	*20.36*	
		For High Strength Steel (HSS), Add	*10.80*	
05 12 23 00-0522	LF	8" x 6" x 5/8" Thick, Plain Steel Angle Iron	69.65	20.48
		For >100 To 250, Deduct	*-3.11*	
		For >250 To 500, Deduct	*-4.85*	
		For >500 To 1,000, Deduct	*-7.27*	
		For >1,000, Deduct	*-9.70*	
		For 316 Stainless Steel, Add	*135.52*	
		For Aluminum, Add	*7.62*	
		For Galvanized Steel, Add	*26.26*	
		For High Strength Steel (HSS), Add	*13.93*	
05 12 23 00-0523	LF	8" x 8" x 5/8" Thick, Plain Steel Angle Iron	79.93	23.50
		For >100 To 250, Deduct	*-3.56*	
		For >250 To 500, Deduct	*-5.56*	
		For >500 To 1,000, Deduct	*-8.34*	
		For >1,000, Deduct	*-11.13*	
		For 316 Stainless Steel, Add	*155.52*	
		For Aluminum, Add	*8.75*	
		For Galvanized Steel, Add	*30.13*	
		For High Strength Steel (HSS), Add	*15.99*	
05 12 23 00-0524		3/4" Thick *(05 12 23 00-0423)*		
05 12 23 00-0525	LF	4" x 4" x 3/4" Thick, Plain Steel Angle Iron	44.12	12.46
		For >100 To 250, Deduct	*-1.93*	
		For >250 To 500, Deduct	*-3.04*	
		For >500 To 1,000, Deduct	*-4.56*	
		For >1,000, Deduct	*-6.07*	
		For 316 Stainless Steel, Add	*88.00*	
		For Aluminum, Add	*4.95*	
		For Galvanized Steel, Add	*17.05*	
		For High Strength Steel (HSS), Add	*8.82*	
05 12 23 00-0526	LF	5" x 3-1/2" x 3/4" Thick, Plain Steel Angle Iron	47.21	13.34
		For >100 To 250, Deduct	*-2.07*	
		For >250 To 500, Deduct	*-3.25*	
		For >500 To 1,000, Deduct	*-4.88*	
		For >1,000, Deduct	*-6.50*	
		For 316 Stainless Steel, Add	*94.14*	
		For Aluminum, Add	*5.30*	
		For Galvanized Steel, Add	*18.24*	
		For High Strength Steel (HSS), Add	*9.44*	
05 12 23 00-0527	LF	5" x 5" x 3/4" Thick, Plain Steel Angle Iron	56.27	15.91
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.87*	
		For >500 To 1,000, Deduct	*-5.81*	
		For >1,000, Deduct	*-7.75*	
		For 316 Stainless Steel, Add	*112.22*	
		For Aluminum, Add	*6.31*	
		For Galvanized Steel, Add	*21.74*	
		For High Strength Steel (HSS), Add	*11.25*	
05 12 23 00-0528	LF	6" x 4" x 3/4" Thick, Plain Steel Angle Iron	56.27	15.91
		For >100 To 250, Deduct	*-2.47*	
		For >250 To 500, Deduct	*-3.87*	
		For >500 To 1,000, Deduct	*-5.81*	
		For >1,000, Deduct	*-7.75*	
		For 316 Stainless Steel, Add	*112.22*	
		For Aluminum, Add	*6.31*	
		For Galvanized Steel, Add	*21.74*	
		For High Strength Steel (HSS), Add	*11.25*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0529	LF	6" x 6" x 3/4" Thick, Plain Steel Angle Iron	68.43	19.33
		For >100 To 250, Deduct	*-3.00*	
		For >250 To 500, Deduct	*-4.71*	
		For >500 To 1,000, Deduct	*-7.07*	
		For >1,000, Deduct	*-9.42*	
		For 316 Stainless Steel, Add	*136.48*	
		For Aluminum, Add	*7.68*	
		For Galvanized Steel, Add	*26.44*	
		For High Strength Steel (HSS), Add	*13.69*	
05 12 23 00-0530	LF	7" x 4" x 3/4" Thick, Plain Steel Angle Iron	62.47	17.65
		For >100 To 250, Deduct	*-2.74*	
		For >250 To 500, Deduct	*-4.30*	
		For >500 To 1,000, Deduct	*-6.45*	
		For >1,000, Deduct	*-8.60*	
		For 316 Stainless Steel, Add	*124.58*	
		For Aluminum, Add	*7.01*	
		For Galvanized Steel, Add	*24.14*	
		For High Strength Steel (HSS), Add	*12.49*	
05 12 23 00-0531	LF	8" x 4" x 3/4" Thick, Plain Steel Angle Iron	68.43	19.33
		For >100 To 250, Deduct	*-3.00*	
		For >250 To 500, Deduct	*-4.71*	
		For >500 To 1,000, Deduct	*-7.07*	
		For >1,000, Deduct	*-9.42*	
		For 316 Stainless Steel, Add	*136.48*	
		For Aluminum, Add	*7.68*	
		For Galvanized Steel, Add	*26.44*	
		For High Strength Steel (HSS), Add	*13.69*	
05 12 23 00-0532	LF	8" x 6" x 3/4" Thick, Plain Steel Angle Iron	80.60	22.76
		For >100 To 250, Deduct	*-3.53*	
		For >250 To 500, Deduct	*-5.55*	
		For >500 To 1,000, Deduct	*-8.32*	
		For >1,000, Deduct	*-11.10*	
		For 316 Stainless Steel, Add	*160.77*	
		For Aluminum, Add	*9.04*	
		For Galvanized Steel, Add	*31.15*	
		For High Strength Steel (HSS), Add	*16.12*	
05 12 23 00-0533	LF	8" x 8" x 3/4" Thick, Plain Steel Angle Iron	92.75	26.21
		For >100 To 250, Deduct	*-4.07*	
		For >250 To 500, Deduct	*-6.38*	
		For >500 To 1,000, Deduct	*-9.58*	
		For >1,000, Deduct	*-12.77*	
		For 316 Stainless Steel, Add	*184.99*	
		For Aluminum, Add	*10.41*	
		For Galvanized Steel, Add	*35.84*	
		For High Strength Steel (HSS), Add	*18.55*	

05 12 23 00-0534 7/8" Thick *(05 12 23 00-0423)*

05 12 23 00-0535	LF	5" x 5" x 7/8" Thick, Plain Steel Angle Iron	63.21	17.11
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-4.30*	
		For >500 To 1,000, Deduct	*-6.45*	
		For >1,000, Deduct	*-8.60*	
		For 316 Stainless Steel, Add	*129.31*	
		For Aluminum, Add	*7.27*	
		For Galvanized Steel, Add	*25.05*	
		For High Strength Steel (HSS), Add	*12.64*	
05 12 23 00-0536	LF	6" x 4" x 7/8" Thick, Plain Steel Angle Iron	63.21	17.11
		For >100 To 250, Deduct	*-2.72*	
		For >250 To 500, Deduct	*-4.30*	
		For >500 To 1,000, Deduct	*-6.45*	
		For >1,000, Deduct	*-8.60*	
		For 316 Stainless Steel, Add	*129.31*	
		For Aluminum, Add	*7.27*	
		For Galvanized Steel, Add	*25.05*	
		For High Strength Steel (HSS), Add	*12.64*	
05 12 23 00-0537	LF	6" x 6" x 7/8" Thick, Plain Steel Angle Iron	76.94	20.82
		For >100 To 250, Deduct	*-3.31*	
		For >250 To 500, Deduct	*-5.23*	
		For >500 To 1,000, Deduct	*-7.85*	
		For >1,000, Deduct	*-10.47*	
		For 316 Stainless Steel, Add	*157.41*	
		For Aluminum, Add	*8.85*	
		For Galvanized Steel, Add	*30.50*	
		For High Strength Steel (HSS), Add	*15.39*	
05 12 23 00-0538	LF	8" x 6" x 7/8" Thick, Plain Steel Angle Iron	90.89	24.59
		For >100 To 250, Deduct	*-3.91*	
		For >250 To 500, Deduct	*-6.18*	
		For >500 To 1,000, Deduct	*-9.28*	
		For >1,000, Deduct	*-12.37*	
		For 316 Stainless Steel, Add	*185.95*	
		For Aluminum, Add	*10.46*	
		For Galvanized Steel, Add	*36.03*	
		For High Strength Steel (HSS), Add	*18.18*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0539	LF	8" x 8" x 7/8" Thick, Plain Steel Angle Iron	104.58	28.30
		For >100 To 250, Deduct	*-4.50*	
		For >250 To 500, Deduct	*-7.12*	
		For >500 To 1,000, Deduct	*-10.67*	
		For >1,000, Deduct	*-14.23*	
		For 316 Stainless Steel, Add	*213.95*	
		For Aluminum, Add	*12.03*	
		For Galvanized Steel, Add	*41.45*	
		For High Strength Steel (HSS), Add	*20.92*	

05 12 23 00-0540 Bar Channel *(05 12 23 00-0422)*

05 12 23 00-0541	LF	1" x 1/2" x 1/8" Thick Bar Channel	5.40	
		For 304 Stainless Steel, Add	*4.62*	
		For 316 Stainless Steel, Add	*5.18*	
		For Aluminum, Add	*0.29*	
		For Galvanized Steel, Add	*1.00*	
		For High Strength Steel (HSS), Add	*1.08*	
05 12 23 00-0542	LF	1-1/4" x 1/2" x 1/8" Thick Bar Channel	6.05	
		For 304 Stainless Steel, Add	*5.53*	
		For 316 Stainless Steel, Add	*6.21*	
		For Aluminum, Add	*0.35*	
		For Galvanized Steel, Add	*1.20*	
		For High Strength Steel (HSS), Add	*1.21*	
05 12 23 00-0543	LF	1-1/2" x 1/2" x 1/8" Thick Bar Channel	6.58	
		For 304 Stainless Steel, Add	*6.10*	
		For 316 Stainless Steel, Add	*6.85*	
		For Aluminum, Add	*0.39*	
		For Galvanized Steel, Add	*1.33*	
		For High Strength Steel (HSS), Add	*1.32*	
05 12 23 00-0544	LF	1-1/2" x 3/4" x 1/8" Thick Bar Channel	7.55	
		For 304 Stainless Steel, Add	*6.36*	
		For 316 Stainless Steel, Add	*7.14*	
		For Aluminum, Add	*0.40*	
		For Galvanized Steel, Add	*1.38*	
		For High Strength Steel (HSS), Add	*1.51*	
05 12 23 00-0545	LF	2" x 1/2" x 1/8" Thick Bar Channel	8.06	
		For 304 Stainless Steel, Add	*7.81*	
		For 316 Stainless Steel, Add	*8.77*	
		For Aluminum, Add	*0.49*	
		For Galvanized Steel, Add	*1.70*	
05 12 23 00-0546	LF	2" x 1" x 1/8" Thick Bar Channel	10.65	
		For 304 Stainless Steel, Add	*8.72*	
		For 316 Stainless Steel, Add	*9.79*	
		For Aluminum, Add	*0.55*	
		For Galvanized Steel, Add	*1.90*	

05 12 23 00-0547 Channels - C *(05 12 23 00-0422)*

05 12 23 00-0548	LF	C2 x 1.78 - 2" Wide Channel	8.85	4.68
		For >100 To 250, Deduct	*-0.53*	
		For >250 To 500, Deduct	*-0.76*	
		For >500 To 1,000, Deduct	*-1.13*	
		For >1,000, Deduct	*-1.51*	
		For 304 Stainless Steel, Add	*7.41*	
		For 316 Stainless Steel, Add	*8.32*	
		For Aluminum, Add	*0.47*	
		For Galvanized Steel, Add	*1.61*	
05 12 23 00-0549	LF	C3 x 4.1 - 3" Wide Channel	15.07	6.74
		For >100 To 250, Deduct	*-0.83*	
		For >250 To 500, Deduct	*-1.20*	
		For >500 To 1,000, Deduct	*-1.80*	
		For >1,000, Deduct	*-2.41*	
		For 304 Stainless Steel, Add	*17.36*	
		For 316 Stainless Steel, Add	*19.49*	
		For Aluminum, Add	*1.10*	
		For Galvanized Steel, Add	*3.78*	
05 12 23 00-0550	LF	C3 x 5 - 3" Wide Channel	18.38	8.22
		For >100 To 250, Deduct	*-1.01*	
		For >250 To 500, Deduct	*-1.47*	
		For >500 To 1,000, Deduct	*-2.20*	
		For >1,000, Deduct	*-2.93*	
		For 304 Stainless Steel, Add	*21.18*	
		For 316 Stainless Steel, Add	*23.78*	
		For Aluminum, Add	*1.34*	
		For Galvanized Steel, Add	*4.61*	
05 12 23 00-0551	LF	C3 x 6 - 3" Wide Channel	22.06	9.86
		For >100 To 250, Deduct	*-1.21*	
		For >250 To 500, Deduct	*-1.76*	
		For >500 To 1,000, Deduct	*-2.64*	
		For >1,000, Deduct	*-3.52*	
		For 304 Stainless Steel, Add	*25.39*	
		For 316 Stainless Steel, Add	*28.51*	
		For Aluminum, Add	*1.60*	
		For Galvanized Steel, Add	*5.52*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0552	LF	C4 x 5.4 - 4" Wide Channel	18.80	8.08
		For >100 To 250, Deduct	*-1.01*	
		For >250 To 500, Deduct	*-1.48*	
		For >500 To 1,000, Deduct	*-2.22*	
		For >1,000, Deduct	*-2.96*	
		For 304 Stainless Steel, Add	*22.86*	
		For 316 Stainless Steel, Add	*25.66*	
		For Aluminum, Add	*1.44*	
		For Galvanized Steel, Add	*4.97*	
05 12 23 00-0553	LF	C4 x 7.25 - 4" Wide Channel	25.24	10.85
		For >100 To 250, Deduct	*-1.35*	
		For >250 To 500, Deduct	*-1.99*	
		For >500 To 1,000, Deduct	*-2.98*	
		For >1,000, Deduct	*-3.97*	
		For 304 Stainless Steel, Add	*30.69*	
		For 316 Stainless Steel, Add	*34.46*	
		For Aluminum, Add	*1.94*	
		For Galvanized Steel, Add	*6.68*	
05 12 23 00-0554	LF	C5 x 6.7 - 5" Wide Channel	22.52	9.42
		For >100 To 250, Deduct	*-1.19*	
		For >250 To 500, Deduct	*-1.75*	
		For >500 To 1,000, Deduct	*-2.63*	
		For >1,000, Deduct	*-3.51*	
		For 304 Stainless Steel, Add	*28.36*	
		For 316 Stainless Steel, Add	*31.84*	
		For Aluminum, Add	*1.79*	
		For Galvanized Steel, Add	*6.17*	
05 12 23 00-0555	LF	C5 x 9 - 5" Wide Channel	30.25	12.68
		For >100 To 250, Deduct	*-1.60*	
		For >250 To 500, Deduct	*-2.36*	
		For >500 To 1,000, Deduct	*-3.53*	
		For >1,000, Deduct	*-4.71*	
		For 304 Stainless Steel, Add	*38.10*	
		For 316 Stainless Steel, Add	*42.78*	
		For Aluminum, Add	*2.41*	
		For Galvanized Steel, Add	*8.29*	
05 12 23 00-0556	LF	C6 x 8.2 - 6" Wide Channel	27.27	11.32
		For >100 To 250, Deduct	*-1.44*	
		For >250 To 500, Deduct	*-2.12*	
		For >500 To 1,000, Deduct	*-3.18*	
		For >1,000, Deduct	*-4.24*	
		For 304 Stainless Steel, Add	*34.71*	
		For 316 Stainless Steel, Add	*38.98*	
		For Aluminum, Add	*2.19*	
		For Galvanized Steel, Add	*7.55*	
05 12 23 00-0557	LF	C6 x 10.5 - 6" Wide Channel	34.92	14.49
		For >100 To 250, Deduct	*-1.84*	
		For >250 To 500, Deduct	*-2.71*	
		For >500 To 1,000, Deduct	*-4.07*	
		For >1,000, Deduct	*-5.42*	
		For 304 Stainless Steel, Add	*44.46*	
		For 316 Stainless Steel, Add	*49.92*	
		For Aluminum, Add	*2.81*	
		For Galvanized Steel, Add	*9.67*	
05 12 23 00-0558	LF	C6 x 13 - 6" Wide Channel	43.25	17.94
		For >100 To 250, Deduct	*-2.28*	
		For >250 To 500, Deduct	*-3.36*	
		For >500 To 1,000, Deduct	*-5.04*	
		For >1,000, Deduct	*-6.72*	
		For 304 Stainless Steel, Add	*55.06*	
		For 316 Stainless Steel, Add	*61.82*	
		For Aluminum, Add	*3.48*	
		For Galvanized Steel, Add	*11.98*	
05 12 23 00-0559	LF	C7 x 9.8 - 7" Wide Channel	32.52	13.47
		For >100 To 250, Deduct	*-1.71*	
		For >250 To 500, Deduct	*-2.52*	
		For >500 To 1,000, Deduct	*-3.79*	
		For >1,000, Deduct	*-5.05*	
		For 304 Stainless Steel, Add	*41.50*	
		For 316 Stainless Steel, Add	*46.59*	
		For Aluminum, Add	*2.62*	
		For Galvanized Steel, Add	*9.03*	
05 12 23 00-0560	LF	C7 x 12.25 - 7" Wide Channel	40.65	16.84
		For >100 To 250, Deduct	*-2.14*	
		For >250 To 500, Deduct	*-3.16*	
		For >500 To 1,000, Deduct	*-4.73*	
		For >1,000, Deduct	*-6.31*	
		For 304 Stainless Steel, Add	*51.87*	
		For 316 Stainless Steel, Add	*58.24*	
		For Aluminum, Add	*3.28*	
		For Galvanized Steel, Add	*11.28*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0561	LF	C7 x 14.75 - 7" Wide Channel	48.96	20.28
		For >100 To 250, Deduct	*-2.58*	
		For >250 To 500, Deduct	*-3.80*	
		For >500 To 1,000, Deduct	*-5.70*	
		For >1,000, Deduct	*-7.60*	
		For 304 Stainless Steel, Add	*62.47*	
		For 316 Stainless Steel, Add	*70.14*	
		For Aluminum, Add	*3.95*	
		For Galvanized Steel, Add	*13.59*	
05 12 23 00-0562	LF	C8 x 11.5 - 8" Wide Channel	36.85	14.82
		For >100 To 250, Deduct	*-1.91*	
		For >250 To 500, Deduct	*-2.83*	
		For >500 To 1,000, Deduct	*-4.25*	
		For >1,000, Deduct	*-5.66*	
		For 304 Stainless Steel, Add	*48.71*	
		For 316 Stainless Steel, Add	*54.69*	
		For Aluminum, Add	*3.08*	
		For Galvanized Steel, Add	*10.60*	
05 12 23 00-0563	LF	C8 x 13.75 - 8" Wide Channel	44.06	17.73
		For >100 To 250, Deduct	*-2.28*	
		For >250 To 500, Deduct	*-3.38*	
		For >500 To 1,000, Deduct	*-5.08*	
		For >1,000, Deduct	*-6.77*	
		For 304 Stainless Steel, Add	*58.23*	
		For 316 Stainless Steel, Add	*65.38*	
		For Aluminum, Add	*3.68*	
		For Galvanized Steel, Add	*12.67*	
05 12 23 00-0564	LF	C8 x 18.75 - 8" Wide Channel	60.08	24.17
		For >100 To 250, Deduct	*-3.11*	
		For >250 To 500, Deduct	*-4.62*	
		For >500 To 1,000, Deduct	*-6.92*	
		For >1,000, Deduct	*-9.23*	
		For 304 Stainless Steel, Add	*79.40*	
		For 316 Stainless Steel, Add	*89.15*	
		For Aluminum, Add	*5.01*	
		For Galvanized Steel, Add	*17.27*	
05 12 23 00-0565	LF	C9 x 13.4 - 9" Wide Channel	42.94	17.27
		For >100 To 250, Deduct	*-2.23*	
		For >250 To 500, Deduct	*-3.30*	
		For >500 To 1,000, Deduct	*-4.95*	
		For >1,000, Deduct	*-6.60*	
		For 304 Stainless Steel, Add	*56.74*	
		For 316 Stainless Steel, Add	*63.71*	
		For Aluminum, Add	*3.58*	
		For Galvanized Steel, Add	*12.34*	
05 12 23 00-0566	LF	C9 x 15 - 9" Wide Channel	48.06	19.33
		For >100 To 250, Deduct	*-2.49*	
		For >250 To 500, Deduct	*-3.69*	
		For >500 To 1,000, Deduct	*-5.54*	
		For >1,000, Deduct	*-7.38*	
		For 304 Stainless Steel, Add	*63.53*	
		For 316 Stainless Steel, Add	*71.33*	
		For Aluminum, Add	*4.01*	
		For Galvanized Steel, Add	*13.82*	
05 12 23 00-0567	LF	C9 x 20 - 9" Wide Channel	64.09	25.77
		For >100 To 250, Deduct	*-3.32*	
		For >250 To 500, Deduct	*-4.92*	
		For >500 To 1,000, Deduct	*-7.38*	
		For >1,000, Deduct	*-9.85*	
		For 304 Stainless Steel, Add	*84.70*	
		For 316 Stainless Steel, Add	*95.10*	
		For Aluminum, Add	*5.35*	
		For Galvanized Steel, Add	*18.43*	
05 12 23 00-0568	LF	C10 x 15.3 - 10" Wide Channel	49.02	19.71
		For >100 To 250, Deduct	*-2.54*	
		For >250 To 500, Deduct	*-3.77*	
		For >500 To 1,000, Deduct	*-5.65*	
		For >1,000, Deduct	*-7.53*	
		For 304 Stainless Steel, Add	*64.78*	
		For 316 Stainless Steel, Add	*72.74*	
		For Aluminum, Add	*4.09*	
		For Galvanized Steel, Add	*14.09*	
05 12 23 00-0569	LF	C10 x 20 - 10" Wide Channel	64.09	25.77
		For >100 To 250, Deduct	*-3.32*	
		For >250 To 500, Deduct	*-4.92*	
		For >500 To 1,000, Deduct	*-7.38*	
		For >1,000, Deduct	*-9.85*	
		For 304 Stainless Steel, Add	*84.70*	
		For 316 Stainless Steel, Add	*95.10*	
		For Aluminum, Add	*5.35*	
		For Galvanized Steel, Add	*18.43*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0570	LF	C10 x 25 - 10" Wide Channel	80.10	32.22
		For >100 To 250, Deduct	*-4.15*	
		For >250 To 500, Deduct	*-6.15*	
		For >500 To 1,000, Deduct	*-9.23*	
		For >1,000, Deduct	*-12.31*	
		For 304 Stainless Steel, Add	*105.85*	
		For 316 Stainless Steel, Add	*118.85*	
		For Aluminum, Add	*6.69*	
		For Galvanized Steel, Add	*23.03*	
05 12 23 00-0571	LF	C10 x 30 - 10" Wide Channel	96.12	38.66
		For >100 To 250, Deduct	*-4.98*	
		For >250 To 500, Deduct	*-7.38*	
		For >500 To 1,000, Deduct	*-11.08*	
		For >1,000, Deduct	*-14.77*	
		For 304 Stainless Steel, Add	*127.02*	
		For 316 Stainless Steel, Add	*142.62*	
		For Aluminum, Add	*8.02*	
		For Galvanized Steel, Add	*27.63*	
05 12 23 00-0572	LF	C12 x 20.7 - 12" Wide Channel	66.33	26.68
		For >100 To 250, Deduct	*-3.44*	
		For >250 To 500, Deduct	*-5.10*	
		For >500 To 1,000, Deduct	*-7.64*	
		For >1,000, Deduct	*-10.19*	
		For 304 Stainless Steel, Add	*87.67*	
		For 316 Stainless Steel, Add	*98.43*	
		For Aluminum, Add	*5.54*	
		For Galvanized Steel, Add	*19.07*	
05 12 23 00-0573	LF	C12 x 25 - 12" Wide Channel	80.10	32.22
		For >100 To 250, Deduct	*-4.15*	
		For >250 To 500, Deduct	*-6.15*	
		For >500 To 1,000, Deduct	*-9.23*	
		For >1,000, Deduct	*-12.31*	
		For 304 Stainless Steel, Add	*105.85*	
		For 316 Stainless Steel, Add	*118.85*	
		For Aluminum, Add	*6.69*	
		For Galvanized Steel, Add	*23.03*	
05 12 23 00-0574	LF	C12 x 30 - 12" Wide Channel	96.12	38.66
		For >100 To 250, Deduct	*-4.98*	
		For >250 To 500, Deduct	*-7.38*	
		For >500 To 1,000, Deduct	*-11.08*	
		For >1,000, Deduct	*-14.77*	
		For 304 Stainless Steel, Add	*127.02*	
		For 316 Stainless Steel, Add	*142.62*	
		For Aluminum, Add	*8.02*	
		For Galvanized Steel, Add	*27.63*	
05 12 23 00-0575	LF	C15 x 33.9 - 15" Wide Channel	108.62	43.69
		For >100 To 250, Deduct	*-5.63*	
		For >250 To 500, Deduct	*-8.34*	
		For >500 To 1,000, Deduct	*-12.52*	
		For >1,000, Deduct	*-16.69*	
		For 304 Stainless Steel, Add	*143.55*	
		For 316 Stainless Steel, Add	*161.18*	
		For Aluminum, Add	*9.07*	
		For Galvanized Steel, Add	*31.23*	
05 12 23 00-0576	LF	C15 x 40 - 15" Wide Channel	128.16	51.55
		For >100 To 250, Deduct	*-6.64*	
		For >250 To 500, Deduct	*-9.84*	
		For >500 To 1,000, Deduct	*-14.77*	
		For >1,000, Deduct	*-19.69*	
		For 304 Stainless Steel, Add	*169.38*	
		For 316 Stainless Steel, Add	*190.18*	
		For Aluminum, Add	*10.70*	
		For Galvanized Steel, Add	*36.85*	
05 12 23 00-0577	LF	C15 x 50 - 15" Wide Channel	160.21	64.43
		For >100 To 250, Deduct	*-8.30*	
		For >250 To 500, Deduct	*-12.31*	
		For >500 To 1,000, Deduct	*-18.46*	
		For >1,000, Deduct	*-24.61*	
		For 304 Stainless Steel, Add	*211.73*	
		For 316 Stainless Steel, Add	*237.73*	
		For Aluminum, Add	*13.37*	
		For Galvanized Steel, Add	*46.06*	

05 12 23 00-0578 Miscellaneous Channels - MC *(05 12 23 00-0422)*

05 12 23 00-0579	LF	MC6 x 12 - 6" Wide Channel	39.92	16.56
		For >100 To 250, Deduct	*-2.10*	
		For >250 To 500, Deduct	*-3.10*	
		For >500 To 1,000, Deduct	*-4.65*	
		For >1,000, Deduct	*-6.20*	
		For 304 Stainless Steel, Add	*50.82*	
		For 316 Stainless Steel, Add	*57.06*	
		For Aluminum, Add	*3.21*	
		For Galvanized Steel, Add	*11.05*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0580	LF	MC6 x 15.1 - 6" Wide Channel	50.23	20.84
		For >100 To 250, Deduct	*-2.65*	
		For >250 To 500, Deduct	*-3.90*	
		For >500 To 1,000, Deduct	*-5.85*	
		For >1,000, Deduct	*-7.80*	
		For 304 Stainless Steel, Add	*63.95*	
		For 316 Stainless Steel, Add	*71.81*	
		For Aluminum, Add	*4.04*	
		For Galvanized Steel, Add	*13.91*	
05 12 23 00-0581	LF	MC6 x 15.3 - 6" Wide Channel	50.89	21.11
		For >100 To 250, Deduct	*-2.68*	
		For >250 To 500, Deduct	*-3.95*	
		For >500 To 1,000, Deduct	*-5.93*	
		For >1,000, Deduct	*-7.91*	
		For 304 Stainless Steel, Add	*64.78*	
		For 316 Stainless Steel, Add	*72.74*	
		For Aluminum, Add	*4.09*	
		For Galvanized Steel, Add	*14.09*	
05 12 23 00-0582	LF	MC6 x 16.3 - 6" Wide Channel	54.22	22.49
		For >100 To 250, Deduct	*-2.86*	
		For >250 To 500, Deduct	*-4.21*	
		For >500 To 1,000, Deduct	*-6.32*	
		For >1,000, Deduct	*-8.42*	
		For 304 Stainless Steel, Add	*69.03*	
		For 316 Stainless Steel, Add	*77.50*	
		For Aluminum, Add	*4.36*	
		For Galvanized Steel, Add	*15.02*	
05 12 23 00-0583	LF	MC6 x 18 - 6" Wide Channel	59.86	24.84
		For >100 To 250, Deduct	*-3.15*	
		For >250 To 500, Deduct	*-4.65*	
		For >500 To 1,000, Deduct	*-6.97*	
		For >1,000, Deduct	*-9.30*	
		For 304 Stainless Steel, Add	*76.21*	
		For 316 Stainless Steel, Add	*85.57*	
		For Aluminum, Add	*4.81*	
		For Galvanized Steel, Add	*16.58*	
05 12 23 00-0584	LF	MC7 x 17.6 - 7" Wide Channel	58.42	24.20
		For >100 To 250, Deduct	*-3.07*	
		For >250 To 500, Deduct	*-4.53*	
		For >500 To 1,000, Deduct	*-6.80*	
		For >1,000, Deduct	*-9.07*	
		For 304 Stainless Steel, Add	*74.53*	
		For 316 Stainless Steel, Add	*83.68*	
		For Aluminum, Add	*4.71*	
		For Galvanized Steel, Add	*16.21*	
05 12 23 00-0585	LF	MC7 x 19.1 - 7" Wide Channel	63.40	26.27
		For >100 To 250, Deduct	*-3.34*	
		For >250 To 500, Deduct	*-4.92*	
		For >500 To 1,000, Deduct	*-7.38*	
		For >1,000, Deduct	*-9.84*	
		For 304 Stainless Steel, Add	*80.88*	
		For 316 Stainless Steel, Add	*90.82*	
		For Aluminum, Add	*5.11*	
		For Galvanized Steel, Add	*17.60*	
05 12 23 00-0586	LF	MC7 x 22.7 - 7" Wide Channel	75.35	31.21
		For >100 To 250, Deduct	*-3.96*	
		For >250 To 500, Deduct	*-5.85*	
		For >500 To 1,000, Deduct	*-8.77*	
		For >1,000, Deduct	*-11.70*	
		For 304 Stainless Steel, Add	*96.13*	
		For 316 Stainless Steel, Add	*107.94*	
		For Aluminum, Add	*6.07*	
		For Galvanized Steel, Add	*20.91*	
05 12 23 00-0587	LF	MC8 x 8.5 - 8" Wide Channel	27.24	10.95
		For >100 To 250, Deduct	*-1.41*	
		For >250 To 500, Deduct	*-2.09*	
		For >500 To 1,000, Deduct	*-3.14*	
		For >1,000, Deduct	*-4.19*	
		For 304 Stainless Steel, Add	*36.00*	
		For 316 Stainless Steel, Add	*40.42*	
		For Aluminum, Add	*2.27*	
		For Galvanized Steel, Add	*7.83*	
05 12 23 00-0588	LF	MC8 x 18.7 - 8" Wide Channel	59.92	24.09
		For >100 To 250, Deduct	*-3.11*	
		For >250 To 500, Deduct	*-4.60*	
		For >500 To 1,000, Deduct	*-6.90*	
		For >1,000, Deduct	*-9.21*	
		For 304 Stainless Steel, Add	*79.17*	
		For 316 Stainless Steel, Add	*88.90*	
		For Aluminum, Add	*5.00*	
		For Galvanized Steel, Add	*17.22*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0589	LF	MC8 x 20 - 8" Wide Channel	64.09	25.77
		For >100 To 250, Deduct	*-3.32*	
		For >250 To 500, Deduct	*-4.92*	
		For >500 To 1,000, Deduct	*-7.38*	
		For >1,000, Deduct	*-9.85*	
		For 304 Stainless Steel, Add	*84.70*	
		For 316 Stainless Steel, Add	*95.10*	
		For Aluminum, Add	*5.35*	
		For Galvanized Steel, Add	*18.43*	
05 12 23 00-0590	LF	MC8 x 21.4 - 8" Wide Channel	68.58	27.59
		For >100 To 250, Deduct	*-3.55*	
		For >250 To 500, Deduct	*-5.27*	
		For >500 To 1,000, Deduct	*-7.90*	
		For >1,000, Deduct	*-10.54*	
		For 304 Stainless Steel, Add	*90.63*	
		For 316 Stainless Steel, Add	*101.76*	
		For Aluminum, Add	*5.72*	
		For Galvanized Steel, Add	*19.72*	
05 12 23 00-0591	LF	MC8 x 22.8 - 8" Wide Channel	73.05	29.39
		For >100 To 250, Deduct	*-3.78*	
		For >250 To 500, Deduct	*-5.61*	
		For >500 To 1,000, Deduct	*-8.42*	
		For >1,000, Deduct	*-11.22*	
		For 304 Stainless Steel, Add	*96.56*	
		For 316 Stainless Steel, Add	*108.42*	
		For Aluminum, Add	*6.10*	
		For Galvanized Steel, Add	*21.01*	
05 12 23 00-0592	LF	MC9 x 23.9 - 9" Wide Channel	76.58	30.81
		For >100 To 250, Deduct	*-3.97*	
		For >250 To 500, Deduct	*-5.88*	
		For >500 To 1,000, Deduct	*-8.82*	
		For >1,000, Deduct	*-11.77*	
		For 304 Stainless Steel, Add	*101.20*	
		For 316 Stainless Steel, Add	*113.63*	
		For Aluminum, Add	*6.39*	
		For Galvanized Steel, Add	*22.02*	
05 12 23 00-0593	LF	MC9 x 25.4 - 9" Wide Channel	81.38	32.73
		For >100 To 250, Deduct	*-4.22*	
		For >250 To 500, Deduct	*-6.25*	
		For >500 To 1,000, Deduct	*-9.38*	
		For >1,000, Deduct	*-12.50*	
		For 304 Stainless Steel, Add	*107.56*	
		For 316 Stainless Steel, Add	*120.77*	
		For Aluminum, Add	*6.79*	
		For Galvanized Steel, Add	*23.40*	
05 12 23 00-0594	LF	MC10 x 6.5 - 10" Wide Channel	20.84	8.38
		For >100 To 250, Deduct	*-1.08*	
		For >250 To 500, Deduct	*-1.60*	
		For >500 To 1,000, Deduct	*-2.40*	
		For >1,000, Deduct	*-3.20*	
		For 304 Stainless Steel, Add	*27.53*	
		For 316 Stainless Steel, Add	*30.91*	
		For Aluminum, Add	*1.74*	
		For Galvanized Steel, Add	*5.99*	
05 12 23 00-0595	LF	MC10 x 8.4 - 10" Wide Channel	26.91	10.82
		For >100 To 250, Deduct	*-1.39*	
		For >250 To 500, Deduct	*-2.07*	
		For >500 To 1,000, Deduct	*-3.10*	
		For >1,000, Deduct	*-4.13*	
		For 304 Stainless Steel, Add	*35.57*	
		For 316 Stainless Steel, Add	*39.94*	
		For Aluminum, Add	*2.25*	
		For Galvanized Steel, Add	*7.74*	
05 12 23 00-0596	LF	MC10 x 21.9 - 10" Wide Channel	70.17	28.23
		For >100 To 250, Deduct	*-3.64*	
		For >250 To 500, Deduct	*-5.39*	
		For >500 To 1,000, Deduct	*-8.09*	
		For >1,000, Deduct	*-10.78*	
		For 304 Stainless Steel, Add	*92.74*	
		For 316 Stainless Steel, Add	*104.13*	
		For Aluminum, Add	*5.86*	
		For Galvanized Steel, Add	*20.17*	
05 12 23 00-0597	LF	MC10 x 24.9 - 10" Wide Channel	79.79	32.10
		For >100 To 250, Deduct	*-4.13*	
		For >250 To 500, Deduct	*-6.13*	
		For >500 To 1,000, Deduct	*-9.19*	
		For >1,000, Deduct	*-12.26*	
		For 304 Stainless Steel, Add	*105.45*	
		For 316 Stainless Steel, Add	*118.40*	
		For Aluminum, Add	*6.66*	
		For Galvanized Steel, Add	*22.94*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0598	LF	MC10 x 25.3 - 10" Wide Channel	81.06	32.61
		For >100 To 250, Deduct	*-4.20*	
		For >250 To 500, Deduct	*-6.23*	
		For >500 To 1,000, Deduct	*-9.34*	
		For >1,000, Deduct	*-12.45*	
		For 304 Stainless Steel, Add	*107.13*	
		For 316 Stainless Steel, Add	*120.29*	
		For Aluminum, Add	*6.77*	
		For Galvanized Steel, Add	*23.31*	
05 12 23 00-0599	LF	MC10 x 28.3 - 10" Wide Channel	90.69	36.47
		For >100 To 250, Deduct	*-4.70*	
		For >250 To 500, Deduct	*-6.97*	
		For >500 To 1,000, Deduct	*-10.45*	
		For >1,000, Deduct	*-13.93*	
		For 304 Stainless Steel, Add	*119.84*	
		For 316 Stainless Steel, Add	*134.56*	
		For Aluminum, Add	*7.57*	
		For Galvanized Steel, Add	*26.07*	
05 12 23 00-0600	LF	MC10 x 28.5 - 10" Wide Channel	91.31	36.73
		For >100 To 250, Deduct	*-4.73*	
		For >250 To 500, Deduct	*-7.01*	
		For >500 To 1,000, Deduct	*-10.52*	
		For >1,000, Deduct	*-14.03*	
		For 304 Stainless Steel, Add	*120.67*	
		For 316 Stainless Steel, Add	*135.49*	
		For Aluminum, Add	*7.62*	
		For Galvanized Steel, Add	*26.25*	
05 12 23 00-0601	LF	MC10 x 33.6 - 10" Wide Channel	107.66	43.31
		For >100 To 250, Deduct	*-5.58*	
		For >250 To 500, Deduct	*-8.27*	
		For >500 To 1,000, Deduct	*-12.41*	
		For >1,000, Deduct	*-16.54*	
		For 304 Stainless Steel, Add	*142.27*	
		For 316 Stainless Steel, Add	*159.74*	
		For Aluminum, Add	*8.99*	
		For Galvanized Steel, Add	*30.95*	
05 12 23 00-0602	LF	MC10 x 41.1 - 10" Wide Channel	131.69	52.98
		For >100 To 250, Deduct	*-6.82*	
		For >250 To 500, Deduct	*-10.12*	
		For >500 To 1,000, Deduct	*-15.17*	
		For >1,000, Deduct	*-20.23*	
		For 304 Stainless Steel, Add	*174.05*	
		For 316 Stainless Steel, Add	*195.42*	
		For Aluminum, Add	*10.99*	
		For Galvanized Steel, Add	*37.86*	
05 12 23 00-0603	LF	MC12 x 30.9 - 12" Wide Channel	99.02	39.82
		For >100 To 250, Deduct	*-5.13*	
		For >250 To 500, Deduct	*-7.61*	
		For >500 To 1,000, Deduct	*-11.41*	
		For >1,000, Deduct	*-15.21*	
		For 304 Stainless Steel, Add	*130.84*	
		For 316 Stainless Steel, Add	*146.91*	
		For Aluminum, Add	*8.26*	
		For Galvanized Steel, Add	*28.46*	
05 12 23 00-0604	LF	MC12 x 32.9 - 12" Wide Channel	105.42	42.39
		For >100 To 250, Deduct	*-5.46*	
		For >250 To 500, Deduct	*-8.10*	
		For >500 To 1,000, Deduct	*-12.15*	
		For >1,000, Deduct	*-16.20*	
		For 304 Stainless Steel, Add	*139.31*	
		For 316 Stainless Steel, Add	*156.42*	
		For Aluminum, Add	*8.80*	
		For Galvanized Steel, Add	*30.31*	
05 12 23 00-0605	LF	MC12 x 35 - 12" Wide Channel	112.14	45.10
		For >100 To 250, Deduct	*-5.81*	
		For >250 To 500, Deduct	*-8.61*	
		For >500 To 1,000, Deduct	*-12.92*	
		For >1,000, Deduct	*-17.23*	
		For 304 Stainless Steel, Add	*148.20*	
		For 316 Stainless Steel, Add	*166.40*	
		For Aluminum, Add	*9.36*	
		For Galvanized Steel, Add	*32.24*	
05 12 23 00-0606	LF	MC12 x 37 - 12" Wide Channel	118.56	47.69
		For >100 To 250, Deduct	*-6.14*	
		For >250 To 500, Deduct	*-9.11*	
		For >500 To 1,000, Deduct	*-13.66*	
		For >1,000, Deduct	*-18.22*	
		For 304 Stainless Steel, Add	*156.66*	
		For 316 Stainless Steel, Add	*175.90*	
		For Aluminum, Add	*9.89*	
		For Galvanized Steel, Add	*34.08*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0607	LF	MC12 x 40 - 12" Wide Channel	128.16	51.55
		For >100 To 250, Deduct	*-6.64*	
		For >250 To 500, Deduct	*-9.84*	
		For >500 To 1,000, Deduct	*-14.77*	
		For >1,000, Deduct	*-19.69*	
		For 304 Stainless Steel, Add	*169.38*	
		For 316 Stainless Steel, Add	*190.18*	
		For Aluminum, Add	*10.70*	
		For Galvanized Steel, Add	*36.85*	
05 12 23 00-0608	LF	MC12 x 45 - 12" Wide Channel	144.19	58.00
		For >100 To 250, Deduct	*-7.47*	
		For >250 To 500, Deduct	*-11.08*	
		For >500 To 1,000, Deduct	*-16.61*	
		For >1,000, Deduct	*-22.15*	
		For 304 Stainless Steel, Add	*190.55*	
		For 316 Stainless Steel, Add	*213.95*	
		For Aluminum, Add	*12.03*	
		For Galvanized Steel, Add	*41.45*	
05 12 23 00-0609	LF	MC12 x 50 - 12" Wide Channel	160.21	64.44
		For >100 To 250, Deduct	*-8.30*	
		For >250 To 500, Deduct	*-12.31*	
		For >500 To 1,000, Deduct	*-18.46*	
		For >1,000, Deduct	*-24.61*	
		For 304 Stainless Steel, Add	*211.73*	
		For 316 Stainless Steel, Add	*237.73*	
		For Aluminum, Add	*13.37*	
		For Galvanized Steel, Add	*46.06*	
05 12 23 00-0610	LF	MC13 x 31.8 - 13" Wide Channel	101.90	40.99
		For >100 To 250, Deduct	*-5.28*	
		For >250 To 500, Deduct	*-7.83*	
		For >500 To 1,000, Deduct	*-11.74*	
		For >1,000, Deduct	*-15.66*	
		For 304 Stainless Steel, Add	*134.66*	
		For 316 Stainless Steel, Add	*151.20*	
		For Aluminum, Add	*8.51*	
		For Galvanized Steel, Add	*29.30*	
05 12 23 00-0611	LF	MC13 x 35 - 13" Wide Channel	112.14	45.10
		For >100 To 250, Deduct	*-5.81*	
		For >250 To 500, Deduct	*-8.61*	
		For >500 To 1,000, Deduct	*-12.92*	
		For >1,000, Deduct	*-17.23*	
		For 304 Stainless Steel, Add	*148.20*	
		For 316 Stainless Steel, Add	*166.40*	
		For Aluminum, Add	*9.36*	
		For Galvanized Steel, Add	*32.24*	
05 12 23 00-0612	LF	MC13 x 40 - 13" Wide Channel	128.16	51.55
		For >100 To 250, Deduct	*-6.64*	
		For >250 To 500, Deduct	*-9.84*	
		For >500 To 1,000, Deduct	*-14.77*	
		For >1,000, Deduct	*-19.69*	
		For 304 Stainless Steel, Add	*169.38*	
		For 316 Stainless Steel, Add	*190.18*	
		For Aluminum, Add	*10.70*	
		For Galvanized Steel, Add	*36.85*	
05 12 23 00-0613	LF	MC13 x 50 - 13" Wide Channel	160.21	64.44
		For >100 To 250, Deduct	*-8.30*	
		For >250 To 500, Deduct	*-12.31*	
		For >500 To 1,000, Deduct	*-18.46*	
		For >1,000, Deduct	*-24.61*	
		For 304 Stainless Steel, Add	*211.73*	
		For 316 Stainless Steel, Add	*237.73*	
		For Aluminum, Add	*13.37*	
		For Galvanized Steel, Add	*46.06*	
05 12 23 00-0614	LF	MC18 x 42.7 - 18" Wide Channel	136.82	55.03
		For >100 To 250, Deduct	*-7.09*	
		For >250 To 500, Deduct	*-10.51*	
		For >500 To 1,000, Deduct	*-15.77*	
		For >1,000, Deduct	*-21.02*	
		For 304 Stainless Steel, Add	*180.80*	
		For 316 Stainless Steel, Add	*203.01*	
		For Aluminum, Add	*11.42*	
		For Galvanized Steel, Add	*39.33*	
05 12 23 00-0615	LF	MC18 x 45.8 - 18" Wide Channel	146.75	59.04
		For >100 To 250, Deduct	*-7.60*	
		For >250 To 500, Deduct	*-11.27*	
		For >500 To 1,000, Deduct	*-16.91*	
		For >1,000, Deduct	*-22.55*	
		For 304 Stainless Steel, Add	*193.94*	
		For 316 Stainless Steel, Add	*217.76*	
		For Aluminum, Add	*12.25*	
		For Galvanized Steel, Add	*42.19*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0616	LF	MC18 x 51.9 - 18" Wide Channel	166.30	66.89
		For >100 To 250, Deduct	*-8.62*	
		For >250 To 500, Deduct	*-12.77*	
		For >500 To 1,000, Deduct	*-19.16*	
		For >1,000, Deduct	*-25.55*	
		For 304 Stainless Steel, Add	*219.76*	
		For 316 Stainless Steel, Add	*246.75*	
		For Aluminum, Add	*13.88*	
		For Galvanized Steel, Add	*47.81*	
05 12 23 00-0617	LF	MC18 x 58 - 18" Wide Channel	185.85	74.74
		For >100 To 250, Deduct	*-9.63*	
		For >250 To 500, Deduct	*-14.28*	
		For >500 To 1,000, Deduct	*-21.41*	
		For >1,000, Deduct	*-28.55*	
		For 304 Stainless Steel, Add	*245.61*	
		For 316 Stainless Steel, Add	*275.78*	
		For Aluminum, Add	*15.51*	
		For Galvanized Steel, Add	*53.43*	

05 12 23 00-0618 Structural Bar Tees *(05 12 23 00-0422)*

05 12 23 00-0619	LF	3/4" x 3/4" x 1/8" Structural Bar Tee	5.77	3.43
		For >100 To 250, Deduct	*-0.37*	
		For >250 To 500, Deduct	*-0.52*	
		For >500 To 1,000, Deduct	*-0.78*	
		For >1,000, Deduct	*-1.03*	
		For 304 Stainless Steel, Add	*3.42*	
		For 316 Stainless Steel, Add	*3.84*	
		For Aluminum, Add	*0.22*	
		For Galvanized Steel, Add	*0.74*	
05 12 23 00-0620	LF	1" x 1" x 1/8" Structural Bar Tee	7.04	4.04
		For >100 To 250, Deduct	*-0.45*	
		For >250 To 500, Deduct	*-0.62*	
		For >500 To 1,000, Deduct	*-0.93*	
		For >1,000, Deduct	*-1.24*	
		For 304 Stainless Steel, Add	*4.70*	
		For 316 Stainless Steel, Add	*5.28*	
		For Aluminum, Add	*0.30*	
		For Galvanized Steel, Add	*1.02*	
05 12 23 00-0621	LF	1-1/2" x 1-1/2" x 1/4" Structural Bar Tee	10.93	4.67
		For >100 To 250, Deduct	*-0.58*	
		For >250 To 500, Deduct	*-0.86*	
		For >500 To 1,000, Deduct	*-1.29*	
		For >1,000, Deduct	*-1.72*	
		For 304 Stainless Steel, Add	*13.42*	
		For 316 Stainless Steel, Add	*15.07*	
		For Aluminum, Add	*0.85*	
		For Galvanized Steel, Add	*2.92*	
05 12 23 00-0622	LF	2" x 2" x 1/4" Structural Bar Tee	15.16	6.11
		For >100 To 250, Deduct	*-0.79*	
		For >250 To 500, Deduct	*-1.17*	
		For >500 To 1,000, Deduct	*-1.75*	
		For >1,000, Deduct	*-2.33*	
		For 304 Stainless Steel, Add	*20.01*	
		For 316 Stainless Steel, Add	*22.46*	
		For Aluminum, Add	*1.26*	
		For Galvanized Steel, Add	*4.35*	
05 12 23 00-0623	LF	2-1/2" x 2-1/2" x 3/8" Structural Bar Tee	22.43	7.37
		For >100 To 250, Deduct	*-1.05*	
		For >250 To 500, Deduct	*-1.61*	
		For >500 To 1,000, Deduct	*-2.42*	
		For >1,000, Deduct	*-3.23*	
		For 304 Stainless Steel, Add	*35.91*	
		For 316 Stainless Steel, Add	*40.32*	
		For Aluminum, Add	*2.27*	
		For Galvanized Steel, Add	*7.81*	
05 12 23 00-0624	LF	3" x 3" x 3/8" Structural Bar Tee	27.69	9.43
		For >100 To 250, Deduct	*-1.32*	
		For >250 To 500, Deduct	*-2.01*	
		For >500 To 1,000, Deduct	*-3.02*	
		For >1,000, Deduct	*-4.03*	
		For 304 Stainless Steel, Add	*43.09*	
		For 316 Stainless Steel, Add	*48.38*	
		For Aluminum, Add	*2.72*	
		For Galvanized Steel, Add	*9.37*	

05 12 23 00-0625 Structural Zees *(05 12 23 00-0422)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0626	LF	1-1/4" x 1-3/4" x 1-3/4" x 3/16" Structural Zee	13.24	4.67
		For >100 To 250, Deduct	*-0.64*	
		For >250 To 500, Deduct	*-0.97*	
		For >500 To 1,000, Deduct	*-1.46*	
		For >1,000, Deduct	*-1.95*	
		For 304 Stainless Steel, Add	*20.01*	
		For 316 Stainless Steel, Add	*22.46*	
		For Aluminum, Add	*1.26*	
		For Galvanized Steel, Add	*4.35*	
05 12 23 00-0627	LF	2-11/16" x 3" x 2-11/16" x 1/4" Structural Zee	24.23	5.57
		For >100 To 250, Deduct	*-0.98*	
		For >250 To 500, Deduct	*-1.58*	
		For >500 To 1,000, Deduct	*-2.37*	
		For >1,000, Deduct	*-3.17*	
		For 304 Stainless Steel, Add	*47.91*	
		For 316 Stainless Steel, Add	*53.79*	
		For Aluminum, Add	*3.03*	
		For Galvanized Steel, Add	*10.42*	
05 12 23 00-0628	LF	3-1/16" x 4" x 3-1/16" x 1/4" Structural Zee	28.96	6.29
		For >100 To 250, Deduct	*-1.14*	
		For >250 To 500, Deduct	*-1.87*	
		For >500 To 1,000, Deduct	*-2.80*	
		For >1,000, Deduct	*-3.74*	
		For 304 Stainless Steel, Add	*58.62*	
		For 316 Stainless Steel, Add	*65.82*	
		For Aluminum, Add	*3.70*	
		For Galvanized Steel, Add	*12.75*	
05 12 23 00-0629	LF	3-1/4" x 5" x 3-1/4" x 5/16" Structural Zee	38.68	7.19
		For >100 To 250, Deduct	*-1.45*	
		For >250 To 500, Deduct	*-2.41*	
		For >500 To 1,000, Deduct	*-3.62*	
		For >1,000, Deduct	*-4.83*	
		For 304 Stainless Steel, Add	*82.94*	
		For 316 Stainless Steel, Add	*93.12*	
		For Aluminum, Add	*5.24*	
		For Galvanized Steel, Add	*18.04*	
05 12 23 00-0630	LF	3-1/2" x 6" x 3-1/2" x 3/8" Structural Zee	49.80	7.81
		For >100 To 250, Deduct	*-1.77*	
		For >250 To 500, Deduct	*-3.01*	
		For >500 To 1,000, Deduct	*-4.52*	
		For >1,000, Deduct	*-6.02*	
		For 304 Stainless Steel, Add	*112.23*	
		For 316 Stainless Steel, Add	*126.02*	
		For Aluminum, Add	*7.09*	
		For Galvanized Steel, Add	*24.42*	

05 12 23 00-0631 Junior I-Beams *(05 12 23 00-0422)*

05 12 23 00-0632	LF	3" Junior I-Beam, 2.9 Lb./LF	18.24	6.74
		For >100 To 250, Deduct	*-0.91*	
		For >250 To 500, Deduct	*-1.36*	
		For >500 To 1,000, Deduct	*-2.04*	
		For >1,000, Deduct	*-2.72*	
		For 304 Stainless Steel, Add	*26.39*	
		For 316 Stainless Steel, Add	*29.63*	
		For Aluminum, Add	*1.67*	
		For Galvanized Steel, Add	*5.74*	
05 12 23 00-0633	LF	4" Junior I-Beam, 3.2 Lb./LF	20.05	7.37
		For >100 To 250, Deduct	*-0.99*	
		For >250 To 500, Deduct	*-1.49*	
		For >500 To 1,000, Deduct	*-2.24*	
		For >1,000, Deduct	*-2.99*	
		For 304 Stainless Steel, Add	*29.13*	
		For 316 Stainless Steel, Add	*32.70*	
		For Aluminum, Add	*1.84*	
		For Galvanized Steel, Add	*6.34*	
05 12 23 00-0634	LF	5" Junior I-Beam, 3.8 Lb./LF	22.90	8.08
		For >100 To 250, Deduct	*-1.11*	
		For >250 To 500, Deduct	*-1.68*	
		For >500 To 1,000, Deduct	*-2.53*	
		For >1,000, Deduct	*-3.37*	
		For 304 Stainless Steel, Add	*34.57*	
		For 316 Stainless Steel, Add	*38.82*	
		For Aluminum, Add	*2.18*	
		For Galvanized Steel, Add	*7.52*	
05 12 23 00-0635	LF	6" Junior I-Beam, 4.4 Lb./LF	25.79	8.80
		For >100 To 250, Deduct	*-1.23*	
		For >250 To 500, Deduct	*-1.88*	
		For >500 To 1,000, Deduct	*-2.81*	
		For >1,000, Deduct	*-3.75*	
		For 304 Stainless Steel, Add	*40.04*	
		For 316 Stainless Steel, Add	*44.96*	
		For Aluminum, Add	*2.53*	
		For Galvanized Steel, Add	*8.71*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0636	LF	7" Junior I-Beam, 5.5 Lb./LF	30.13	9.43
		For >100 To 250, Deduct	*-1.38*	
		For >250 To 500, Deduct	*-2.14*	
		For >500 To 1,000, Deduct	*-3.20*	
		For >1,000, Deduct	*-4.27*	
		For 304 Stainless Steel, Add	*50.05*	
		For 316 Stainless Steel, Add	*56.19*	
		For Aluminum, Add	*3.16*	
		For Galvanized Steel, Add	*10.89*	
05 12 23 00-0637	LF	8" Junior I-Beam, 6.5 Lb./LF	34.16	10.06
		For >100 To 250, Deduct	*-1.52*	
		For >250 To 500, Deduct	*-2.38*	
		For >500 To 1,000, Deduct	*-3.57*	
		For >1,000, Deduct	*-4.76*	
		For 304 Stainless Steel, Add	*59.14*	
		For 316 Stainless Steel, Add	*66.40*	
		For Aluminum, Add	*3.74*	
		For Galvanized Steel, Add	*12.87*	
05 12 23 00-0638	LF	10" Junior I-Beam, 9 Lb./LF	44.06	11.50
		For >100 To 250, Deduct	*-1.87*	
		For >250 To 500, Deduct	*-2.97*	
		For >500 To 1,000, Deduct	*-4.45*	
		For >1,000, Deduct	*-5.94*	
		For 304 Stainless Steel, Add	*81.88*	
		For 316 Stainless Steel, Add	*91.94*	
		For Aluminum, Add	*5.17*	
		For Galvanized Steel, Add	*17.81*	
05 12 23 00-0639	LF	12" Junior I-Beam, 11.8 Lb./LF	55.87	13.65
		For >100 To 250, Deduct	*-2.31*	
		For >250 To 500, Deduct	*-3.70*	
		For >500 To 1,000, Deduct	*-5.56*	
		For >1,000, Deduct	*-7.41*	
		For 304 Stainless Steel, Add	*107.36*	
		For 316 Stainless Steel, Add	*120.54*	
		For Aluminum, Add	*6.78*	
		For Galvanized Steel, Add	*23.36*	

05 12 23 00-0640 Round Stock *(05 12 23 00-0422)*

05 12 23 00-0641	LF	1/4" Carbon Steel Rounds, ASTM A108	2.60	
		For 304 Stainless Steel, Add	*3.99*	
		For 316 Stainless Steel, Add	*4.48*	
		For Aluminum, Add	*0.25*	
		For Galvanized Steel, Add	*0.87*	
05 12 23 00-0642	LF	3/8" Carbon Steel Rounds, ASTM A108	4.11	
		For 304 Stainless Steel, Add	*7.84*	
		For 316 Stainless Steel, Add	*8.80*	
		For Aluminum, Add	*0.50*	
		For Galvanized Steel, Add	*1.71*	
05 12 23 00-0643	LF	1/2" Carbon Steel Rounds, ASTM A108	5.69	
		For 304 Stainless Steel, Add	*11.94*	
		For 316 Stainless Steel, Add	*13.41*	
		For Aluminum, Add	*0.75*	
		For Galvanized Steel, Add	*2.60*	
05 12 23 00-0644	LF	5/8" Carbon Steel Rounds, ASTM A108	8.64	
		For 304 Stainless Steel, Add	*19.89*	
		For 316 Stainless Steel, Add	*22.34*	
		For Aluminum, Add	*1.26*	
		For Galvanized Steel, Add	*4.33*	
05 12 23 00-0645	LF	3/4" Carbon Steel Rounds, ASTM A108	10.28	
		For 304 Stainless Steel, Add	*23.63*	
		For 316 Stainless Steel, Add	*26.53*	
		For Aluminum, Add	*1.49*	
		For Galvanized Steel, Add	*5.14*	
05 12 23 00-0646	LF	7/8" Carbon Steel Rounds, ASTM A108	12.00	
		For 304 Stainless Steel, Add	*27.62*	
		For 316 Stainless Steel, Add	*31.01*	
		For Aluminum, Add	*1.74*	
		For Galvanized Steel, Add	*6.01*	
05 12 23 00-0647	LF	1" Carbon Steel Rounds, ASTM A108	17.48	
		For 304 Stainless Steel, Add	*42.07*	
		For 316 Stainless Steel, Add	*47.23*	
		For Aluminum, Add	*2.66*	
		For Galvanized Steel, Add	*9.15*	
05 12 23 00-0648	LF	1-1/8" Carbon Steel Rounds, ASTM A108	21.25	
		For 304 Stainless Steel, Add	*51.10*	
		For 316 Stainless Steel, Add	*57.38*	
		For Aluminum, Add	*3.23*	
		For Galvanized Steel, Add	*11.12*	
05 12 23 00-0649	LF	1-1/4" Carbon Steel Rounds, ASTM A108	25.39	
		For 304 Stainless Steel, Add	*60.16*	
		For 316 Stainless Steel, Add	*67.55*	
		For Aluminum, Add	*3.80*	
		For Galvanized Steel, Add	*13.09*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0650	LF	1-3/8" Carbon Steel Rounds, ASTM A108	30.75	
		For 304 Stainless Steel, Add	*73.42*	
		For 316 Stainless Steel, Add	*82.43*	
		For Aluminum, Add	*4.64*	
		For Galvanized Steel, Add	*15.97*	
05 12 23 00-0651	LF	1-1/2" Carbon Steel Rounds, ASTM A108	34.25	
		For 304 Stainless Steel, Add	*80.54*	
		For 316 Stainless Steel, Add	*90.43*	
		For Aluminum, Add	*5.09*	
		For Galvanized Steel, Add	*17.52*	
05 12 23 00-0652	LF	1-5/8" Carbon Steel Rounds, ASTM A108	39.51	
		For 304 Stainless Steel, Add	*91.26*	
		For 316 Stainless Steel, Add	*102.46*	
		For Aluminum, Add	*5.76*	
		For Galvanized Steel, Add	*19.85*	
05 12 23 00-0653	LF	1-3/4" Carbon Steel Rounds, ASTM A108	47.24	
		For 304 Stainless Steel, Add	*106.19*	
		For 316 Stainless Steel, Add	*119.23*	
		For Aluminum, Add	*6.71*	
		For Galvanized Steel, Add	*23.10*	
05 12 23 00-0654	LF	1-7/8" Carbon Steel Rounds, ASTM A108	56.83	
		For 304 Stainless Steel, Add	*124.40*	
		For 316 Stainless Steel, Add	*139.68*	
		For Aluminum, Add	*7.86*	
		For Galvanized Steel, Add	*27.06*	
05 12 23 00-0655	LF	2" Carbon Steel Rounds, ASTM A108	64.88	
		For 304 Stainless Steel, Add	*138.40*	
		For 316 Stainless Steel, Add	*155.39*	
		For Aluminum, Add	*8.74*	
		For Galvanized Steel, Add	*30.11*	
05 12 23 00-0656	LF	2-1/8" Carbon Steel Rounds, ASTM A108	75.72	
		For 304 Stainless Steel, Add	*158.03*	
		For 316 Stainless Steel, Add	*177.44*	
		For Aluminum, Add	*9.98*	
		For Galvanized Steel, Add	*34.38*	
05 12 23 00-0657	LF	2-1/4" Carbon Steel Rounds, ASTM A108	85.65	
		For 304 Stainless Steel, Add	*177.70*	
		For 316 Stainless Steel, Add	*199.52*	
		For Aluminum, Add	*11.22*	
		For Galvanized Steel, Add	*38.66*	
05 12 23 00-0658	LF	2-3/8" Carbon Steel Rounds, ASTM A108	98.11	
		For 304 Stainless Steel, Add	*203.23*	
		For 316 Stainless Steel, Add	*228.19*	
		For Aluminum, Add	*12.84*	
		For Galvanized Steel, Add	*44.21*	
05 12 23 00-0659	LF	2-1/2" Carbon Steel Rounds, ASTM A108	108.32	
		For 304 Stainless Steel, Add	*219.05*	
		For 316 Stainless Steel, Add	*245.95*	
		For Aluminum, Add	*13.83*	
		For Galvanized Steel, Add	*47.65*	
05 12 23 00-0660	LF	2-5/8" Carbon Steel Rounds, ASTM A108	132.58	
		For 304 Stainless Steel, Add	*278.22*	
		For 316 Stainless Steel, Add	*312.38*	
		For Aluminum, Add	*17.57*	
		For Galvanized Steel, Add	*60.52*	
05 12 23 00-0661	LF	2-3/4" Carbon Steel Rounds, ASTM A108	150.95	
		For 304 Stainless Steel, Add	*317.29*	
		For 316 Stainless Steel, Add	*356.26*	
		For Aluminum, Add	*20.04*	
		For Galvanized Steel, Add	*69.02*	
05 12 23 00-0662	LF	2-7/8 Carbon Steel Rounds, ASTM A108	168.35	
		For 304 Stainless Steel, Add	*353.57*	
		For 316 Stainless Steel, Add	*396.99*	
		For Aluminum, Add	*22.33*	
		For Galvanized Steel, Add	*76.92*	
05 12 23 00-0663	LF	3" Carbon Steel Rounds, ASTM A108	176.73	
		For 304 Stainless Steel, Add	*364.17*	
		For 316 Stainless Steel, Add	*408.90*	
		For Aluminum, Add	*23.00*	
		For Galvanized Steel, Add	*79.22*	
05 12 23 00-0664	LF	3-1/8" Carbon Steel Rounds, ASTM A108	184.23	
		For 304 Stainless Steel, Add	*372.27*	
		For 316 Stainless Steel, Add	*417.98*	
		For Aluminum, Add	*23.51*	
		For Galvanized Steel, Add	*80.98*	
05 12 23 00-0665	LF	3-1/4" Carbon Steel Rounds, ASTM A108	194.23	
		For 304 Stainless Steel, Add	*387.46*	
		For 316 Stainless Steel, Add	*435.04*	
		For Aluminum, Add	*24.47*	
		For Galvanized Steel, Add	*84.29*	
05 12 23 00-0666	LF	3-1/2" Carbon Steel Rounds, ASTM A108	236.59	
		For 304 Stainless Steel, Add	*491.60*	
		For 316 Stainless Steel, Add	*551.97*	
		For Aluminum, Add	*31.05*	
		For Galvanized Steel, Add	*106.94*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0667	LF	3-5/8" Carbon Steel Rounds, ASTM A108	262.89	
		For 304 Stainless Steel, Add	*549.94*	
		For 316 Stainless Steel, Add	*617.47*	
		For Aluminum, Add	*34.73*	
		For Galvanized Steel, Add	*119.64*	
05 12 23 00-0668	LF	3-3/4" Carbon Steel Rounds, ASTM A108	282.16	
		For 304 Stainless Steel, Add	*588.27*	
		For 316 Stainless Steel, Add	*660.51*	
		For Aluminum, Add	*37.15*	
		For Galvanized Steel, Add	*127.97*	
05 12 23 00-0669	LF	4" Carbon Steel Rounds, ASTM A108	316.59	
		For 304 Stainless Steel, Add	*669.78*	
		For 316 Stainless Steel, Add	*752.03*	
		For Aluminum, Add	*42.30*	
		For Galvanized Steel, Add	*145.71*	

05 12 23 00-0670 Square Stock *(05 12 23 00-0422)*

05 12 23 00-0671	LF	3/8" Square Bar Stock	2.07	
		For 304 Stainless Steel, Add	*2.02*	
		For 316 Stainless Steel, Add	*2.27*	
		For Aluminum, Add	*0.13*	
		For Galvanized Steel, Add	*0.44*	
05 12 23 00-0672	LF	1/2" Square Bar Stock	2.75	
		For 304 Stainless Steel, Add	*3.56*	
		For 316 Stainless Steel, Add	*4.00*	
		For Aluminum, Add	*0.23*	
		For Galvanized Steel, Add	*0.78*	
05 12 23 00-0673	LF	5/8" Square Bar Stock	3.62	
		For 304 Stainless Steel, Add	*5.59*	
		For 316 Stainless Steel, Add	*6.27*	
		For Aluminum, Add	*0.35*	
		For Galvanized Steel, Add	*1.22*	
05 12 23 00-0674	LF	3/4" Square Bar Stock	4.82	
		For 304 Stainless Steel, Add	*8.07*	
		For 316 Stainless Steel, Add	*9.06*	
		For Aluminum, Add	*0.51*	
		For Galvanized Steel, Add	*1.75*	
05 12 23 00-0675	LF	7/8" Square Bar Stock	6.26	
		For 304 Stainless Steel, Add	*11.26*	
		For 316 Stainless Steel, Add	*12.64*	
		For Aluminum, Add	*0.71*	
		For Galvanized Steel, Add	*2.45*	
05 12 23 00-0676	LF	1" Square Bar Stock	7.76	
		For 304 Stainless Steel, Add	*14.36*	
		For 316 Stainless Steel, Add	*16.13*	
		For Aluminum, Add	*0.91*	
		For Galvanized Steel, Add	*3.12*	
05 12 23 00-0677	LF	1-1/4" Square Bar Stock	12.15	
		For 304 Stainless Steel, Add	*22.43*	
		For 316 Stainless Steel, Add	*25.18*	
		For Aluminum, Add	*1.42*	
		For Galvanized Steel, Add	*4.88*	
05 12 23 00-0678	LF	1-1/2" Square Bar Stock	17.32	
		For 304 Stainless Steel, Add	*32.29*	
		For 316 Stainless Steel, Add	*36.26*	
		For Aluminum, Add	*2.04*	
		For Galvanized Steel, Add	*7.02*	
05 12 23 00-0679	LF	1-3/4" Square Bar Stock	25.74	
		For 304 Stainless Steel, Add	*44.92*	
		For 316 Stainless Steel, Add	*50.43*	
		For Aluminum, Add	*2.84*	
		For Galvanized Steel, Add	*9.77*	
05 12 23 00-0680	LF	2" Square Bar Stock	36.92	
		For 304 Stainless Steel, Add	*57.46*	
		For 316 Stainless Steel, Add	*64.51*	
		For Aluminum, Add	*3.63*	
		For Galvanized Steel, Add	*12.50*	

05 12 23 00-0681 Steel Tubing *(05 12 23 00-0422)*

Note: General purpose low-carbon steel.

05 12 23 00-0682 Square Steel Tubing *(05 12 23 00-0681)*

05 12 23 00-0683 0.06" Wall Thickness *(05 12 23 00-0682)*

05 12 23 00-0684	LF	1/2" x 1/2" x 0.06" Square Steel Tubing	2.71	0.64
		For >100 To 250, Deduct	*-0.11*	
		For >250 To 500, Deduct	*-0.18*	
		For >500 To 1,000, Deduct	*-0.27*	
		For >1,000, Deduct	*-0.36*	
		For 304 Stainless Steel, Add	*5.27*	
		For 316 Stainless Steel, Add	*5.92*	
		For Aluminum, Add	*0.33*	
		For Galvanized Steel, Add	*1.15*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0685	LF	3/4" x 3/4" x 0.06" Square Steel Tubing	4.17	1.02
		For >100 To 250, Deduct	*-0.17*	
		For >250 To 500, Deduct	*-0.28*	
		For >500 To 1,000, Deduct	*-0.41*	
		For >1,000, Deduct	*-0.55*	
		For 304 Stainless Steel, Add	*8.04*	
		For 316 Stainless Steel, Add	*9.02*	
		For Aluminum, Add	*0.51*	
		For Galvanized Steel, Add	*1.75*	
05 12 23 00-0686	LF	1" x 1" x 0.06" Square Steel Tubing	5.61	1.84
		For >100 To 250, Deduct	*-0.23*	
		For >250 To 500, Deduct	*-0.37*	
		For >500 To 1,000, Deduct	*-0.56*	
		For >1,000, Deduct	*-0.75*	
		For 304 Stainless Steel, Add	*10.74*	
		For 316 Stainless Steel, Add	*12.06*	
		For Aluminum, Add	*0.68*	
		For Galvanized Steel, Add	*2.34*	
05 12 23 00-0687	LF	1-1/4" x 1-1/4" x 0.06" Square Steel Tubing	7.41	1.74
		For >100 To 250, Deduct	*-0.30*	
		For >250 To 500, Deduct	*-0.49*	
		For >500 To 1,000, Deduct	*-0.73*	
		For >1,000, Deduct	*-0.97*	
		For 304 Stainless Steel, Add	*14.48*	
		For 316 Stainless Steel, Add	*16.26*	
		For Aluminum, Add	*0.91*	
		For Galvanized Steel, Add	*3.15*	
05 12 23 00-0688	LF	1-1/2" x 1-1/2" x 0.06" Square Steel Tubing	8.79	2.11
		For >100 To 250, Deduct	*-0.36*	
		For >250 To 500, Deduct	*-0.58*	
		For >500 To 1,000, Deduct	*-0.87*	
		For >1,000, Deduct	*-1.16*	
		For 304 Stainless Steel, Add	*17.01*	
		For 316 Stainless Steel, Add	*19.10*	
		For Aluminum, Add	*1.07*	
		For Galvanized Steel, Add	*3.70*	

05 12 23 00-0689 0.083" Wall Thickness *(05 12 23 00-0682)*

05 12 23 00-0690	LF	3/4" x 3/4" x 0.083" Square Steel Tubing	4.85	1.19
		For >100 To 250, Deduct	*-0.20*	
		For >250 To 500, Deduct	*-0.32*	
		For >500 To 1,000, Deduct	*-0.48*	
		For >1,000, Deduct	*-0.64*	
		For 304 Stainless Steel, Add	*9.32*	
		For 316 Stainless Steel, Add	*10.46*	
		For Aluminum, Add	*0.59*	
		For Galvanized Steel, Add	*2.03*	
05 12 23 00-0691	LF	1" x 1" x 0.083" Square Steel Tubing	7.07	1.63
		For >100 To 250, Deduct	*-0.29*	
		For >250 To 500, Deduct	*-0.46*	
		For >500 To 1,000, Deduct	*-0.69*	
		For >1,000, Deduct	*-0.92*	
		For 304 Stainless Steel, Add	*13.97*	
		For 316 Stainless Steel, Add	*15.68*	
		For Aluminum, Add	*0.88*	
		For Galvanized Steel, Add	*3.04*	
05 12 23 00-0692	LF	1-1/4" x 1-1/4" x 0.083" Square Steel Tubing	8.54	2.07
		For >100 To 250, Deduct	*-0.35*	
		For >250 To 500, Deduct	*-0.57*	
		For >500 To 1,000, Deduct	*-0.85*	
		For >1,000, Deduct	*-1.13*	
		For 304 Stainless Steel, Add	*16.47*	
		For 316 Stainless Steel, Add	*18.50*	
		For Aluminum, Add	*1.04*	
		For Galvanized Steel, Add	*3.58*	
05 12 23 00-0693	LF	1-1/2" x 1-1/2" x 0.083" Square Steel Tubing	10.32	2.52
		For >100 To 250, Deduct	*-0.43*	
		For >250 To 500, Deduct	*-0.68*	
		For >500 To 1,000, Deduct	*-1.03*	
		For >1,000, Deduct	*-1.37*	
		For 304 Stainless Steel, Add	*19.86*	
		For 316 Stainless Steel, Add	*22.30*	
		For Aluminum, Add	*1.25*	
		For Galvanized Steel, Add	*4.32*	
05 12 23 00-0694	LF	2" x 2" x 0.083" Square Steel Tubing	13.25	3.35
		For >100 To 250, Deduct	*-0.55*	
		For >250 To 500, Deduct	*-0.89*	
		For >500 To 1,000, Deduct	*-1.33*	
		For >1,000, Deduct	*-1.77*	
		For 304 Stainless Steel, Add	*25.02*	
		For 316 Stainless Steel, Add	*28.10*	
		For Aluminum, Add	*1.58*	
		For Galvanized Steel, Add	*5.44*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0695		**0.12" Wall Thickness** *(05 12 23 00-0682)*		
05 12 23 00-0696	LF	1" x 1" x 0.12" Square Steel Tubing	7.81	1.93
		For >100 To 250, Deduct	*-0.32*	
		For >250 To 500, Deduct	*-0.52*	
		For >500 To 1,000, Deduct	*-0.78*	
		For >1,000, Deduct	*-1.04*	
		For 304 Stainless Steel, Add	*14.88*	
		For 316 Stainless Steel, Add	*16.70*	
		For Aluminum, Add	*0.94*	
		For Galvanized Steel, Add	*3.24*	
05 12 23 00-0697	LF	1-1/4" x 1-1/4" x 0.12" Square Steel Tubing	10.04	2.49
		For >100 To 250, Deduct	*-0.42*	
		For >250 To 500, Deduct	*-0.67*	
		For >500 To 1,000, Deduct	*-1.00*	
		For >1,000, Deduct	*-1.34*	
		For 304 Stainless Steel, Add	*19.18*	
		For 316 Stainless Steel, Add	*21.54*	
		For Aluminum, Add	*1.21*	
		For Galvanized Steel, Add	*4.17*	
05 12 23 00-0698	LF	1-1/2" x 1-1/2" x 0.12" Square Steel Tubing	12.33	3.04
		For >100 To 250, Deduct	*-0.51*	
		For >250 To 500, Deduct	*-0.82*	
		For >500 To 1,000, Deduct	*-1.23*	
		For >1,000, Deduct	*-1.64*	
		For 304 Stainless Steel, Add	*23.60*	
		For 316 Stainless Steel, Add	*26.50*	
		For Aluminum, Add	*1.49*	
		For Galvanized Steel, Add	*5.13*	
05 12 23 00-0699	LF	2" x 2" x 0.12" Square Steel Tubing	16.70	4.14
		For >100 To 250, Deduct	*-0.69*	
		For >250 To 500, Deduct	*-1.11*	
		For >500 To 1,000, Deduct	*-1.67*	
		For >1,000, Deduct	*-2.22*	
		For 304 Stainless Steel, Add	*31.86*	
		For 316 Stainless Steel, Add	*35.78*	
		For Aluminum, Add	*2.01*	
		For Galvanized Steel, Add	*6.93*	
05 12 23 00-0700		**1/8" Wall Thickness** *(05 12 23 00-0682)*		
05 12 23 00-0701	LF	2" x 2" x 1/8" Square Steel Tubing	15.05	4.30
		For >100 To 250, Deduct	*-0.66*	
		For >250 To 500, Deduct	*-1.04*	
		For >500 To 1,000, Deduct	*-1.56*	
		For >1,000, Deduct	*-2.08*	
		For 304 Stainless Steel, Add	*26.56*	
		For 316 Stainless Steel, Add	*29.82*	
		For Aluminum, Add	*1.68*	
		For Galvanized Steel, Add	*5.78*	
05 12 23 00-0702	LF	2-1/2" x 2-1/2" x 1/8" Square Steel Tubing	19.85	5.45
		For >100 To 250, Deduct	*-0.86*	
		For >250 To 500, Deduct	*-1.36*	
		For >500 To 1,000, Deduct	*-2.03*	
		For >1,000, Deduct	*-2.71*	
		For 304 Stainless Steel, Add	*35.88*	
		For 316 Stainless Steel, Add	*40.29*	
		For Aluminum, Add	*2.27*	
		For Galvanized Steel, Add	*7.81*	
05 12 23 00-0703	LF	3" x 3" x 1/8" Square Steel Tubing	23.26	6.59
		For >100 To 250, Deduct	*-1.02*	
		For >250 To 500, Deduct	*-1.60*	
		For >500 To 1,000, Deduct	*-2.40*	
		For >1,000, Deduct	*-3.21*	
		For 304 Stainless Steel, Add	*41.24*	
		For 316 Stainless Steel, Add	*46.30*	
		For Aluminum, Add	*2.60*	
		For Galvanized Steel, Add	*8.97*	
05 12 23 00-0704	LF	3-1/2" x 3-1/2" x 1/8" Square Steel Tubing	26.96	7.74
		For >100 To 250, Deduct	*-1.19*	
		For >250 To 500, Deduct	*-1.86*	
		For >500 To 1,000, Deduct	*-2.80*	
		For >1,000, Deduct	*-3.73*	
		For 304 Stainless Steel, Add	*47.42*	
		For 316 Stainless Steel, Add	*53.25*	
		For Aluminum, Add	*3.00*	
		For Galvanized Steel, Add	*10.32*	
05 12 23 00-0705	LF	4" x 4" x 1/8" Square Steel Tubing	29.72	8.88
		For >100 To 250, Deduct	*-1.34*	
		For >250 To 500, Deduct	*-2.08*	
		For >500 To 1,000, Deduct	*-3.12*	
		For >1,000, Deduct	*-4.16*	
		For 304 Stainless Steel, Add	*50.93*	
		For 316 Stainless Steel, Add	*57.18*	
		For Aluminum, Add	*3.22*	
		For Galvanized Steel, Add	*11.08*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0706		3/16" Wall Thickness *(05 12 23 00-0682)*		
05 12 23 00-0707	LF	2" x 2" x 3/16" Square Steel Tubing	17.06	4.85
		For >100 To 250, Deduct	*-0.75*	
		For >250 To 500, Deduct	*-1.18*	
		For >500 To 1,000, Deduct	*-1.76*	
		For >1,000, Deduct	*-2.35*	
		For 304 Stainless Steel, Add	*30.21*	
		For 316 Stainless Steel, Add	*33.92*	
		For Aluminum, Add	*1.91*	
		For Galvanized Steel, Add	*6.57*	
05 12 23 00-0708	LF	2-1/2" x 2-1/2" x 3/16" Square Steel Tubing	22.09	6.27
		For >100 To 250, Deduct	*-0.97*	
		For >250 To 500, Deduct	*-1.52*	
		For >500 To 1,000, Deduct	*-2.28*	
		For >1,000, Deduct	*-3.05*	
		For 304 Stainless Steel, Add	*39.10*	
		For 316 Stainless Steel, Add	*43.90*	
		For Aluminum, Add	*2.47*	
		For Galvanized Steel, Add	*8.51*	
05 12 23 00-0709	LF	3" x 3" x 3/16" Square Steel Tubing	27.15	7.71
		For >100 To 250, Deduct	*-1.19*	
		For >250 To 500, Deduct	*-1.87*	
		For >500 To 1,000, Deduct	*-2.81*	
		For >1,000, Deduct	*-3.74*	
		For 304 Stainless Steel, Add	*48.05*	
		For 316 Stainless Steel, Add	*53.95*	
		For Aluminum, Add	*3.03*	
		For Galvanized Steel, Add	*10.45*	
05 12 23 00-0710	LF	3-1/2" x 3-1/2" x 3/16" Square Steel Tubing	32.21	9.15
		For >100 To 250, Deduct	*-1.42*	
		For >250 To 500, Deduct	*-2.22*	
		For >500 To 1,000, Deduct	*-3.33*	
		For >1,000, Deduct	*-4.44*	
		For 304 Stainless Steel, Add	*57.03*	
		For 316 Stainless Steel, Add	*64.03*	
		For Aluminum, Add	*3.60*	
		For Galvanized Steel, Add	*12.41*	
05 12 23 00-0711	LF	4" x 4" x 3/16" Square Steel Tubing	37.22	10.58
		For >100 To 250, Deduct	*-1.64*	
		For >250 To 500, Deduct	*-2.57*	
		For >500 To 1,000, Deduct	*-3.85*	
		For >1,000, Deduct	*-5.13*	
		For 304 Stainless Steel, Add	*65.89*	
		For 316 Stainless Steel, Add	*73.98*	
		For Aluminum, Add	*4.16*	
		For Galvanized Steel, Add	*14.33*	
05 12 23 00-0712	LF	4-1/2" x 4-1/2" x 3/16" Square Steel Tubing	42.29	12.01
		For >100 To 250, Deduct	*-1.86*	
		For >250 To 500, Deduct	*-2.92*	
		For >500 To 1,000, Deduct	*-4.37*	
		For >1,000, Deduct	*-5.83*	
		For 304 Stainless Steel, Add	*74.87*	
		For 316 Stainless Steel, Add	*84.06*	
		For Aluminum, Add	*4.73*	
		For Galvanized Steel, Add	*16.29*	
05 12 23 00-0713	LF	5" x 5" x 3/16" Square Steel Tubing	47.30	13.44
		For >100 To 250, Deduct	*-2.08*	
		For >250 To 500, Deduct	*-3.26*	
		For >500 To 1,000, Deduct	*-4.89*	
		For >1,000, Deduct	*-6.52*	
		For 304 Stainless Steel, Add	*83.73*	
		For 316 Stainless Steel, Add	*94.02*	
		For Aluminum, Add	*5.29*	
		For Galvanized Steel, Add	*18.22*	
05 12 23 00-0714	LF	6" x 6" x 3/16" Square Steel Tubing	57.43	16.31
		For >100 To 250, Deduct	*-2.52*	
		For >250 To 500, Deduct	*-3.96*	
		For >500 To 1,000, Deduct	*-5.94*	
		For >1,000, Deduct	*-7.92*	
		For 304 Stainless Steel, Add	*101.66*	
		For 316 Stainless Steel, Add	*114.14*	
		For Aluminum, Add	*6.42*	
		For Galvanized Steel, Add	*22.12*	
05 12 23 00-0715		1/4" Wall Thickness *(05 12 23 00-0682)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0716	LF	2" x 2" x 1/4" Square Steel Tubing	18.20	4.86
		For >100 To 250, Deduct	*-0.78*	
		For >250 To 500, Deduct	*-1.23*	
		For >500 To 1,000, Deduct	*-1.85*	
		For >1,000, Deduct	*-2.47*	
		For 304 Stainless Steel, Add	*33.40*	
		For 316 Stainless Steel, Add	*37.50*	
		For Aluminum, Add	*2.11*	
		For Galvanized Steel, Add	*7.27*	
05 12 23 00-0717	LF	2-1/2" x 2-1/2" x 1/4" Square Steel Tubing	23.92	6.38
		For >100 To 250, Deduct	*-1.02*	
		For >250 To 500, Deduct	*-1.62*	
		For >500 To 1,000, Deduct	*-2.43*	
		For >1,000, Deduct	*-3.24*	
		For 304 Stainless Steel, Add	*43.89*	
		For 316 Stainless Steel, Add	*49.28*	
		For Aluminum, Add	*2.77*	
		For Galvanized Steel, Add	*9.55*	
05 12 23 00-0718	LF	3" x 3" x 1/4" Square Steel Tubing	29.64	7.91
		For >100 To 250, Deduct	*-1.27*	
		For >250 To 500, Deduct	*-2.01*	
		For >500 To 1,000, Deduct	*-3.01*	
		For >1,000, Deduct	*-4.02*	
		For 304 Stainless Steel, Add	*54.41*	
		For 316 Stainless Steel, Add	*61.09*	
		For Aluminum, Add	*3.44*	
		For Galvanized Steel, Add	*11.84*	
05 12 23 00-0719	LF	3-1/2" x 3-1/2" x 1/4" Square Steel Tubing	35.35	9.44
		For >100 To 250, Deduct	*-1.51*	
		For >250 To 500, Deduct	*-2.40*	
		For >500 To 1,000, Deduct	*-3.59*	
		For >1,000, Deduct	*-4.79*	
		For 304 Stainless Steel, Add	*64.89*	
		For 316 Stainless Steel, Add	*72.86*	
		For Aluminum, Add	*4.10*	
		For Galvanized Steel, Add	*14.12*	
05 12 23 00-0720	LF	4" x 4" x 1/4" Square Steel Tubing	41.07	10.96
		For >100 To 250, Deduct	*-1.76*	
		For >250 To 500, Deduct	*-2.78*	
		For >500 To 1,000, Deduct	*-4.18*	
		For >1,000, Deduct	*-5.57*	
		For 304 Stainless Steel, Add	*75.38*	
		For 316 Stainless Steel, Add	*84.64*	
		For Aluminum, Add	*4.76*	
		For Galvanized Steel, Add	*16.40*	
05 12 23 00-0721	LF	4-1/2" x 4-1/2" x 1/4" Square Steel Tubing	46.80	12.49
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-3.17*	
		For >500 To 1,000, Deduct	*-4.76*	
		For >1,000, Deduct	*-6.35*	
		For 304 Stainless Steel, Add	*85.90*	
		For 316 Stainless Steel, Add	*96.45*	
		For Aluminum, Add	*5.43*	
		For Galvanized Steel, Add	*18.69*	
05 12 23 00-0722	LF	5" x 5" x 1/4" Square Steel Tubing	52.55	14.03
		For >100 To 250, Deduct	*-2.25*	
		For >250 To 500, Deduct	*-3.56*	
		For >500 To 1,000, Deduct	*-5.34*	
		For >1,000, Deduct	*-7.13*	
		For 304 Stainless Steel, Add	*96.44*	
		For 316 Stainless Steel, Add	*108.29*	
		For Aluminum, Add	*6.09*	
		For Galvanized Steel, Add	*20.98*	
05 12 23 00-0723	LF	6" x 6" x 1/4" Square Steel Tubing	63.99	17.08
		For >100 To 250, Deduct	*-2.74*	
		For >250 To 500, Deduct	*-4.34*	
		For >500 To 1,000, Deduct	*-6.51*	
		For >1,000, Deduct	*-8.68*	
		For 304 Stainless Steel, Add	*117.45*	
		For 316 Stainless Steel, Add	*131.87*	
		For Aluminum, Add	*7.42*	
		For Galvanized Steel, Add	*25.55*	

05 12 23 00-0724 Rectangular Steel Tubing *(05 12 23 00-0681)*

05 12 23 00-0725 3/16" Wall Thickness *(05 12 23 00-0724)*

05 12 23 00-0726	LF	3" x 2" x 3/16" Square Steel Tubing	22.09	6.27
		For >100 To 250, Deduct	*-0.97*	
		For >250 To 500, Deduct	*-1.52*	
		For >500 To 1,000, Deduct	*-2.28*	
		For >1,000, Deduct	*-3.05*	
		For 304 Stainless Steel, Add	*39.10*	
		For 316 Stainless Steel, Add	*43.90*	
		For Aluminum, Add	*2.47*	
		For Galvanized Steel, Add	*8.51*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0727	LF	4" x 2" x 3/16" Square Steel Tubing	27.15	7.71
		For >100 To 250, Deduct	*-1.19*	
		For >250 To 500, Deduct	*-1.87*	
		For >500 To 1,000, Deduct	*-2.81*	
		For >1,000, Deduct	*-3.74*	
		For 304 Stainless Steel, Add	*48.05*	
		For 316 Stainless Steel, Add	*53.95*	
		For Aluminum, Add	*3.03*	
		For Galvanized Steel, Add	*10.45*	
05 12 23 00-0728	LF	4" x 3" x 3/16" Square Steel Tubing	32.21	9.15
		For >100 To 250, Deduct	*-1.42*	
		For >250 To 500, Deduct	*-2.22*	
		For >500 To 1,000, Deduct	*-3.33*	
		For >1,000, Deduct	*-4.44*	
		For 304 Stainless Steel, Add	*57.03*	
		For 316 Stainless Steel, Add	*64.03*	
		For Aluminum, Add	*3.60*	
		For Galvanized Steel, Add	*12.41*	
05 12 23 00-0729	LF	5" x 2" x 3/16" Square Steel Tubing	32.21	9.15
		For >100 To 250, Deduct	*-1.42*	
		For >250 To 500, Deduct	*-2.22*	
		For >500 To 1,000, Deduct	*-3.33*	
		For >1,000, Deduct	*-4.44*	
		For 304 Stainless Steel, Add	*57.03*	
		For 316 Stainless Steel, Add	*64.03*	
		For Aluminum, Add	*3.60*	
		For Galvanized Steel, Add	*12.41*	
05 12 23 00-0730	LF	5" x 3" x 3/16" Square Steel Tubing	37.22	10.58
		For >100 To 250, Deduct	*-1.64*	
		For >250 To 500, Deduct	*-2.57*	
		For >500 To 1,000, Deduct	*-3.85*	
		For >1,000, Deduct	*-5.13*	
		For 304 Stainless Steel, Add	*65.89*	
		For 316 Stainless Steel, Add	*73.98*	
		For Aluminum, Add	*4.16*	
		For Galvanized Steel, Add	*14.33*	
05 12 23 00-0731	LF	5" x 4" x 3/16" Square Steel Tubing	42.29	12.01
		For >100 To 250, Deduct	*-1.86*	
		For >250 To 500, Deduct	*-2.92*	
		For >500 To 1,000, Deduct	*-4.37*	
		For >1,000, Deduct	*-5.83*	
		For 304 Stainless Steel, Add	*74.87*	
		For 316 Stainless Steel, Add	*84.06*	
		For Aluminum, Add	*4.73*	
		For Galvanized Steel, Add	*16.29*	
05 12 23 00-0732	LF	6" x 2" x 3/16" Square Steel Tubing	37.22	10.58
		For >100 To 250, Deduct	*-1.64*	
		For >250 To 500, Deduct	*-2.57*	
		For >500 To 1,000, Deduct	*-3.85*	
		For >1,000, Deduct	*-5.13*	
		For 304 Stainless Steel, Add	*65.89*	
		For 316 Stainless Steel, Add	*73.98*	
		For Aluminum, Add	*4.16*	
		For Galvanized Steel, Add	*14.33*	
05 12 23 00-0733	LF	6" x 3" x 3/16" Square Steel Tubing	42.29	12.01
		For >100 To 250, Deduct	*-1.86*	
		For >250 To 500, Deduct	*-2.92*	
		For >500 To 1,000, Deduct	*-4.37*	
		For >1,000, Deduct	*-5.83*	
		For 304 Stainless Steel, Add	*74.87*	
		For 316 Stainless Steel, Add	*84.06*	
		For Aluminum, Add	*4.73*	
		For Galvanized Steel, Add	*16.29*	
05 12 23 00-0734	LF	6" x 4" x 3/16" Square Steel Tubing	47.30	13.44
		For >100 To 250, Deduct	*-2.08*	
		For >250 To 500, Deduct	*-3.26*	
		For >500 To 1,000, Deduct	*-4.89*	
		For >1,000, Deduct	*-6.52*	
		For 304 Stainless Steel, Add	*83.73*	
		For 316 Stainless Steel, Add	*94.02*	
		For Aluminum, Add	*5.29*	
		For Galvanized Steel, Add	*18.22*	

05 12 23 00-0735 1/4" Wall Thickness *(05 12 23 00-0724)*

05 12 23 00-0736	LF	3" x 2" x 1/4" Square Steel Tubing	23.92	6.38
		For >100 To 250, Deduct	*-1.02*	
		For >250 To 500, Deduct	*-1.62*	
		For >500 To 1,000, Deduct	*-2.43*	
		For >1,000, Deduct	*-3.24*	
		For 304 Stainless Steel, Add	*43.89*	
		For 316 Stainless Steel, Add	*49.28*	
		For Aluminum, Add	*2.77*	
		For Galvanized Steel, Add	*9.55*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0737	LF	4" x 2" x 1/4" Square Steel Tubing	29.64	7.91
		For >100 To 250, Deduct	*-1.27*	
		For >250 To 500, Deduct	*-2.01*	
		For >500 To 1,000, Deduct	*-3.01*	
		For >1,000, Deduct	*-4.02*	
		For 304 Stainless Steel, Add	*54.41*	
		For 316 Stainless Steel, Add	*61.09*	
		For Aluminum, Add	*3.44*	
		For Galvanized Steel, Add	*11.84*	
05 12 23 00-0738	LF	4" x 3" x 1/4" Square Steel Tubing	35.35	9.44
		For >100 To 250, Deduct	*-1.51*	
		For >250 To 500, Deduct	*-2.40*	
		For >500 To 1,000, Deduct	*-3.59*	
		For >1,000, Deduct	*-4.79*	
		For 304 Stainless Steel, Add	*64.89*	
		For 316 Stainless Steel, Add	*72.86*	
		For Aluminum, Add	*4.10*	
		For Galvanized Steel, Add	*14.12*	
05 12 23 00-0739	LF	5" x 2" x 1/4" Square Steel Tubing	35.35	9.44
		For >100 To 250, Deduct	*-1.51*	
		For >250 To 500, Deduct	*-2.40*	
		For >500 To 1,000, Deduct	*-3.59*	
		For >1,000, Deduct	*-4.79*	
		For 304 Stainless Steel, Add	*64.89*	
		For 316 Stainless Steel, Add	*72.86*	
		For Aluminum, Add	*4.10*	
		For Galvanized Steel, Add	*14.12*	
05 12 23 00-0740	LF	5" x 3" x 1/4" Square Steel Tubing	41.07	10.96
		For >100 To 250, Deduct	*-1.76*	
		For >250 To 500, Deduct	*-2.78*	
		For >500 To 1,000, Deduct	*-4.18*	
		For >1,000, Deduct	*-5.57*	
		For 304 Stainless Steel, Add	*75.38*	
		For 316 Stainless Steel, Add	*84.64*	
		For Aluminum, Add	*4.76*	
		For Galvanized Steel, Add	*16.40*	
05 12 23 00-0741	LF	5" x 4" x 1/4" Square Steel Tubing	46.80	12.49
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-3.17*	
		For >500 To 1,000, Deduct	*-4.76*	
		For >1,000, Deduct	*-6.35*	
		For 304 Stainless Steel, Add	*85.90*	
		For 316 Stainless Steel, Add	*96.45*	
		For Aluminum, Add	*5.43*	
		For Galvanized Steel, Add	*18.69*	
05 12 23 00-0742	LF	6" x 2" x 1/4" Square Steel Tubing	41.07	10.96
		For >100 To 250, Deduct	*-1.76*	
		For >250 To 500, Deduct	*-2.78*	
		For >500 To 1,000, Deduct	*-4.18*	
		For >1,000, Deduct	*-5.57*	
		For 304 Stainless Steel, Add	*75.38*	
		For 316 Stainless Steel, Add	*84.64*	
		For Aluminum, Add	*4.76*	
		For Galvanized Steel, Add	*16.40*	
05 12 23 00-0743	LF	6" x 3" x 1/4" Square Steel Tubing	46.80	12.49
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-3.17*	
		For >500 To 1,000, Deduct	*-4.76*	
		For >1,000, Deduct	*-6.35*	
		For 304 Stainless Steel, Add	*85.90*	
		For 316 Stainless Steel, Add	*96.45*	
		For Aluminum, Add	*5.43*	
		For Galvanized Steel, Add	*18.69*	
05 12 23 00-0744	LF	6" x 4" x 1/4" Square Steel Tubing	52.55	14.03
		For >100 To 250, Deduct	*-2.25*	
		For >250 To 500, Deduct	*-3.56*	
		For >500 To 1,000, Deduct	*-5.34*	
		For >1,000, Deduct	*-7.13*	
		For 304 Stainless Steel, Add	*96.44*	
		For 316 Stainless Steel, Add	*108.29*	
		For Aluminum, Add	*6.09*	
		For Galvanized Steel, Add	*20.98*	

05 12 23 00-0745 Round Steel Tubing *(05 12 23 00-0681)*

05 12 23 00-0746 0.065" Wall Thickness *(05 12 23 00-0745)*

05 12 23 00-0747	LF	1" Diameter x 0.065" Round Steel Tubing	4.84	1.17
		For >100 To 250, Deduct	*-0.20*	
		For >250 To 500, Deduct	*-0.32*	
		For >500 To 1,000, Deduct	*-0.48*	
		For >1,000, Deduct	*-0.64*	
		For 304 Stainless Steel, Add	*9.38*	
		For 316 Stainless Steel, Add	*10.53*	
		For Aluminum, Add	*0.59*	
		For Galvanized Steel, Add	*2.04*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0748	LF	1-1/4" Diameter x 0.065" Round Steel Tubing	6.15	1.48
		For >100 To 250, Deduct	*-0.25*	
		For >250 To 500, Deduct	*-0.41*	
		For >500 To 1,000, Deduct	*-0.61*	
		For >1,000, Deduct	*-0.81*	
		For 304 Stainless Steel, Add	*11.91*	
		For 316 Stainless Steel, Add	*13.38*	
		For Aluminum, Add	*0.75*	
		For Galvanized Steel, Add	*2.59*	
05 12 23 00-0749	LF	1-1/2" Diameter x 0.065" Round Steel Tubing	7.45	1.79
		For >100 To 250, Deduct	*-0.31*	
		For >250 To 500, Deduct	*-0.49*	
		For >500 To 1,000, Deduct	*-0.74*	
		For >1,000, Deduct	*-0.98*	
		For 304 Stainless Steel, Add	*14.42*	
		For 316 Stainless Steel, Add	*16.19*	
		For Aluminum, Add	*0.91*	
		For Galvanized Steel, Add	*3.14*	
05 12 23 00-0750	LF	2" Diameter x 0.065" Round Steel Tubing	10.04	2.42
		For >100 To 250, Deduct	*-0.41*	
		For >250 To 500, Deduct	*-0.66*	
		For >500 To 1,000, Deduct	*-0.99*	
		For >1,000, Deduct	*-1.33*	
		For 304 Stainless Steel, Add	*19.44*	
		For 316 Stainless Steel, Add	*21.82*	
		For Aluminum, Add	*1.23*	
		For Galvanized Steel, Add	*4.23*	
05 12 23 00-0751	LF	2-1/2" Diameter x 0.065" Round Steel Tubing	12.63	3.04
		For >100 To 250, Deduct	*-0.52*	
		For >250 To 500, Deduct	*-0.83*	
		For >500 To 1,000, Deduct	*-1.25*	
		For >1,000, Deduct	*-1.67*	
		For 304 Stainless Steel, Add	*24.45*	
		For 316 Stainless Steel, Add	*27.46*	
		For Aluminum, Add	*1.54*	
		For Galvanized Steel, Add	*5.32*	
05 12 23 00-0752	LF	3" Diameter x 0.065" Round Steel Tubing	15.22	3.65
		For >100 To 250, Deduct	*-0.62*	
		For >250 To 500, Deduct	*-1.01*	
		For >500 To 1,000, Deduct	*-1.51*	
		For >1,000, Deduct	*-2.01*	
		For 304 Stainless Steel, Add	*29.47*	
		For 316 Stainless Steel, Add	*33.09*	
		For Aluminum, Add	*1.86*	
		For Galvanized Steel, Add	*6.41*	
05 12 23 00-0753	LF	3-1/2" Diameter x 0.065" Round Steel Tubing	17.81	4.29
		For >100 To 250, Deduct	*-0.73*	
		For >250 To 500, Deduct	*-1.18*	
		For >500 To 1,000, Deduct	*-1.76*	
		For >1,000, Deduct	*-2.35*	
		For 304 Stainless Steel, Add	*34.49*	
		For 316 Stainless Steel, Add	*38.72*	
		For Aluminum, Add	*2.18*	
		For Galvanized Steel, Add	*7.50*	
05 12 23 00-0754	LF	4" Diameter x 0.065" Round Steel Tubing	20.41	4.91
		For >100 To 250, Deduct	*-0.84*	
		For >250 To 500, Deduct	*-1.35*	
		For >500 To 1,000, Deduct	*-2.02*	
		For >1,000, Deduct	*-2.70*	
		For 304 Stainless Steel, Add	*39.53*	
		For 316 Stainless Steel, Add	*44.38*	
		For Aluminum, Add	*2.50*	
		For Galvanized Steel, Add	*8.60*	

05 12 23 00-0755 0.083" Wall Thickness *(05 12 23 00-0745)*

05 12 23 00-0756	LF	1" Diameter x 0.083" Round Steel Tubing	5.26	1.28
		For >100 To 250, Deduct	*-0.22*	
		For >250 To 500, Deduct	*-0.35*	
		For >500 To 1,000, Deduct	*-0.52*	
		For >1,000, Deduct	*-0.70*	
		For 304 Stainless Steel, Add	*10.15*	
		For 316 Stainless Steel, Add	*11.39*	
		For Aluminum, Add	*0.64*	
		For Galvanized Steel, Add	*2.21*	
05 12 23 00-0757	LF	1-1/4" Diameter x 0.083" Round Steel Tubing	6.70	1.63
		For >100 To 250, Deduct	*-0.28*	
		For >250 To 500, Deduct	*-0.44*	
		For >500 To 1,000, Deduct	*-0.66*	
		For >1,000, Deduct	*-0.89*	
		For 304 Stainless Steel, Add	*12.94*	
		For 316 Stainless Steel, Add	*14.53*	
		For Aluminum, Add	*0.82*	
		For Galvanized Steel, Add	*2.81*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0758	LF	1-1/2" Diameter x 0.083" Round Steel Tubing	8.14	1.97
		For >100 To 250, Deduct	*-0.34*	
		For >250 To 500, Deduct	*-0.54*	
		For >500 To 1,000, Deduct	*-0.81*	
		For >1,000, Deduct	*-1.08*	
		For 304 Stainless Steel, Add	*15.70*	
		For 316 Stainless Steel, Add	*17.63*	
		For Aluminum, Add	*0.99*	
		For Galvanized Steel, Add	*3.42*	
05 12 23 00-0759	LF	2" Diameter x 0.083" Round Steel Tubing	11.01	2.67
		For >100 To 250, Deduct	*-0.45*	
		For >250 To 500, Deduct	*-0.73*	
		For >500 To 1,000, Deduct	*-1.09*	
		For >1,000, Deduct	*-1.46*	
		For 304 Stainless Steel, Add	*21.23*	
		For 316 Stainless Steel, Add	*23.84*	
		For Aluminum, Add	*1.34*	
		For Galvanized Steel, Add	*4.62*	
05 12 23 00-0760	LF	2-1/2" Diameter x 0.083" Round Steel Tubing	13.89	3.37
		For >100 To 250, Deduct	*-0.57*	
		For >250 To 500, Deduct	*-0.92*	
		For >500 To 1,000, Deduct	*-1.38*	
		For >1,000, Deduct	*-1.84*	
		For 304 Stainless Steel, Add	*26.79*	
		For 316 Stainless Steel, Add	*30.08*	
		For Aluminum, Add	*1.69*	
		For Galvanized Steel, Add	*5.83*	
05 12 23 00-0761	LF	3" Diameter x 0.083" Round Steel Tubing	16.76	4.07
		For >100 To 250, Deduct	*-0.69*	
		For >250 To 500, Deduct	*-1.11*	
		For >500 To 1,000, Deduct	*-1.66*	
		For >1,000, Deduct	*-2.22*	
		For 304 Stainless Steel, Add	*32.32*	
		For 316 Stainless Steel, Add	*36.29*	
		For Aluminum, Add	*2.04*	
		For Galvanized Steel, Add	*7.03*	
05 12 23 00-0762	LF	3-1/2" Diameter x 0.083" Round Steel Tubing	19.63	4.76
		For >100 To 250, Deduct	*-0.81*	
		For >250 To 500, Deduct	*-1.30*	
		For >500 To 1,000, Deduct	*-1.95*	
		For >1,000, Deduct	*-2.60*	
		For 304 Stainless Steel, Add	*37.85*	
		For 316 Stainless Steel, Add	*42.50*	
		For Aluminum, Add	*2.39*	
		For Galvanized Steel, Add	*8.23*	
05 12 23 00-0763	LF	4" Diameter x 0.083" Round Steel Tubing	22.50	5.46
		For >100 To 250, Deduct	*-0.93*	
		For >250 To 500, Deduct	*-1.49*	
		For >500 To 1,000, Deduct	*-2.23*	
		For >1,000, Deduct	*-2.98*	
		For 304 Stainless Steel, Add	*43.38*	
		For 316 Stainless Steel, Add	*48.70*	
		For Aluminum, Add	*2.74*	
		For Galvanized Steel, Add	*9.44*	

05 12 23 00-0764 0.125" Wall Thickness *(05 12 23 00-0745)*

05 12 23 00-0765	LF	2" Diameter x 0.125" Round Steel Tubing	11.81	3.37
		For >100 To 250, Deduct	*-0.52*	
		For >250 To 500, Deduct	*-0.82*	
		For >500 To 1,000, Deduct	*-1.22*	
		For >1,000, Deduct	*-1.63*	
		For 304 Stainless Steel, Add	*20.83*	
		For 316 Stainless Steel, Add	*23.39*	
		For Aluminum, Add	*1.32*	
		For Galvanized Steel, Add	*4.53*	
05 12 23 00-0766	LF	2-1/2" Diameter x 0.125" Round Steel Tubing	14.96	4.27
		For >100 To 250, Deduct	*-0.66*	
		For >250 To 500, Deduct	*-1.03*	
		For >500 To 1,000, Deduct	*-1.55*	
		For >1,000, Deduct	*-2.07*	
		For 304 Stainless Steel, Add	*26.39*	
		For 316 Stainless Steel, Add	*29.63*	
		For Aluminum, Add	*1.67*	
		For Galvanized Steel, Add	*5.74*	
05 12 23 00-0767	LF	3" Diameter x 0.125" Round Steel Tubing	18.11	5.17
		For >100 To 250, Deduct	*-0.80*	
		For >250 To 500, Deduct	*-1.25*	
		For >500 To 1,000, Deduct	*-1.88*	
		For >1,000, Deduct	*-2.50*	
		For 304 Stainless Steel, Add	*31.95*	
		For 316 Stainless Steel, Add	*35.87*	
		For Aluminum, Add	*2.02*	
		For Galvanized Steel, Add	*6.95*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0768	LF	3-1/2" Diameter x 0.125" Round Steel Tubing	21.25	6.07
		For >100 To 250, Deduct	*-0.94*	
		For >250 To 500, Deduct	*-1.47*	
		For >500 To 1,000, Deduct	*-2.20*	
		For >1,000, Deduct	*-2.93*	
		For 304 Stainless Steel, Add	*37.51*	
		For 316 Stainless Steel, Add	*42.11*	
		For Aluminum, Add	*2.37*	
		For Galvanized Steel, Add	*8.16*	
05 12 23 00-0769	LF	4" Diameter x 0.125" Round Steel Tubing	24.40	6.97
		For >100 To 250, Deduct	*-1.07*	
		For >250 To 500, Deduct	*-1.68*	
		For >500 To 1,000, Deduct	*-2.53*	
		For >1,000, Deduct	*-3.37*	
		For 304 Stainless Steel, Add	*43.06*	
		For 316 Stainless Steel, Add	*48.35*	
		For Aluminum, Add	*2.72*	
		For Galvanized Steel, Add	*9.37*	

05 12 23 00-0770 Flat Steel Bar *(05 12 23 00-0422)*

05 12 23 00-0771 1/8" Thick *(05 12 23 00-0770)*

05 12 23 00-0772	LF	1/8" Thick x 1" Wide Flat Steel Bar	3.61	1.68
		For 304 Stainless Steel, Add	*3.11*	
		For 316 Stainless Steel, Add	*3.49*	
		For Aluminum, Add	*0.20*	
		For Galvanized Steel, Add	*0.68*	
05 12 23 00-0773	LF	1/8" Thick x 2" Wide Flat Steel Bar	5.59	2.52
		For 304 Stainless Steel, Add	*5.16*	
		For 316 Stainless Steel, Add	*5.79*	
		For Aluminum, Add	*0.33*	
		For Galvanized Steel, Add	*1.12*	
05 12 23 00-0774	LF	1/8" Thick x 4" Wide Flat Steel Bar	8.61	3.54
		For 304 Stainless Steel, Add	*9.38*	
		For 316 Stainless Steel, Add	*10.53*	
		For Aluminum, Add	*0.59*	
		For Galvanized Steel, Add	*2.04*	
05 12 23 00-0775	LF	1/8" Thick x 6" Wide Flat Steel Bar	11.67	4.81
		For 304 Stainless Steel, Add	*12.68*	
		For 316 Stainless Steel, Add	*14.24*	
		For Aluminum, Add	*0.80*	
		For Galvanized Steel, Add	*2.76*	

05 12 23 00-0776 3/16" Thick *(05 12 23 00-0770)*

05 12 23 00-0777	LF	3/16" Thick x 1" Wide Flat Steel Bar	4.78	2.08
		For 304 Stainless Steel, Add	*4.73*	
		For 316 Stainless Steel, Add	*5.31*	
		For Aluminum, Add	*0.30*	
		For Galvanized Steel, Add	*1.03*	
05 12 23 00-0778	LF	3/16" Thick x 2" Wide Flat Steel Bar	7.55	3.12
		For 304 Stainless Steel, Add	*8.15*	
		For 316 Stainless Steel, Add	*9.15*	
		For Aluminum, Add	*0.51*	
		For Galvanized Steel, Add	*1.77*	
05 12 23 00-0779	LF	3/16" Thick x 4" Wide Flat Steel Bar	10.22	3.59
		For 304 Stainless Steel, Add	*13.77*	
		For 316 Stainless Steel, Add	*15.46*	
		For Aluminum, Add	*0.87*	
		For Galvanized Steel, Add	*2.99*	
05 12 23 00-0780	LF	3/16" Thick x 6" Wide Flat Steel Bar	14.14	4.98
		For 304 Stainless Steel, Add	*19.01*	
		For 316 Stainless Steel, Add	*21.34*	
		For Aluminum, Add	*1.20*	
		For Galvanized Steel, Add	*4.14*	

05 12 23 00-0781 1/4" Thick *(05 12 23 00-0770)*

05 12 23 00-0782	LF	1/4" Thick x 1" Wide Flat Steel Bar	4.94	2.20
		For 304 Stainless Steel, Add	*4.67*	
		For 316 Stainless Steel, Add	*5.25*	
		For Aluminum, Add	*0.30*	
		For Galvanized Steel, Add	*1.02*	
05 12 23 00-0783	LF	1/4" Thick x 2" Wide Flat Steel Bar	8.26	3.30
		For 304 Stainless Steel, Add	*9.43*	
		For 316 Stainless Steel, Add	*10.59*	
		For Aluminum, Add	*0.60*	
		For Galvanized Steel, Add	*2.05*	
05 12 23 00-0784	LF	1/4" Thick x 4" Wide Flat Steel Bar	12.08	3.78
		For 304 Stainless Steel, Add	*18.27*	
		For 316 Stainless Steel, Add	*20.51*	
		For Aluminum, Add	*1.15*	
		For Galvanized Steel, Add	*3.97*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0785	LF	1/4" Thick x 6" Wide Flat Steel Bar	17.48	5.58
		For 304 Stainless Steel, Add	*25.91*	
		For 316 Stainless Steel, Add	*29.09*	
		For Aluminum, Add	*1.64*	
		For Galvanized Steel, Add	*5.64*	

05 12 23 00-0786 3/8" Thick *(05 12 23 00-0770)*

05 12 23 00-0787	LF	3/8" Thick x 1" Wide Flat Steel Bar	6.29	2.48
		For 304 Stainless Steel, Add	*7.32*	
		For 316 Stainless Steel, Add	*8.22*	
		For Aluminum, Add	*0.46*	
		For Galvanized Steel, Add	*1.59*	
05 12 23 00-0788	LF	3/8" Thick x 2" Wide Flat Steel Bar	10.32	3.71
		For 304 Stainless Steel, Add	*13.51*	
		For 316 Stainless Steel, Add	*15.17*	
		For Aluminum, Add	*0.85*	
		For Galvanized Steel, Add	*2.94*	
05 12 23 00-0789	LF	3/8" Thick x 4" Wide Flat Steel Bar	15.85	4.24
		For 304 Stainless Steel, Add	*27.02*	
		For 316 Stainless Steel, Add	*30.34*	
		For Aluminum, Add	*1.71*	
		For Galvanized Steel, Add	*5.88*	
05 12 23 00-0790	LF	3/8" Thick x 6" Wide Flat Steel Bar	22.77	6.27
		For 304 Stainless Steel, Add	*38.02*	
		For 316 Stainless Steel, Add	*42.69*	
		For Aluminum, Add	*2.40*	
		For Galvanized Steel, Add	*8.27*	

05 12 23 00-0791 1/2" Thick *(05 12 23 00-0770)*

05 12 23 00-0792	LF	1/2" Thick x 1" Wide Flat Steel Bar	7.39	2.72
		For 304 Stainless Steel, Add	*9.38*	
		For 316 Stainless Steel, Add	*10.53*	
		For Aluminum, Add	*0.59*	
		For Galvanized Steel, Add	*2.04*	
05 12 23 00-0793	LF	1/2" Thick x 2" Wide Flat Steel Bar	12.19	4.10
		For 304 Stainless Steel, Add	*17.24*	
		For 316 Stainless Steel, Add	*19.36*	
		For Aluminum, Add	*1.09*	
		For Galvanized Steel, Add	*3.75*	
05 12 23 00-0794	LF	1/2" Thick x 4" Wide Flat Steel Bar	17.32	4.66
		For 304 Stainless Steel, Add	*29.38*	
		For 316 Stainless Steel, Add	*32.99*	
		For Aluminum, Add	*1.86*	
		For Galvanized Steel, Add	*6.39*	
05 12 23 00-0795	LF	1/2" Thick x 6" Wide Flat Steel Bar	30.94	6.91
		For 304 Stainless Steel, Add	*58.62*	
		For 316 Stainless Steel, Add	*65.82*	
		For Aluminum, Add	*3.70*	
		For Galvanized Steel, Add	*12.75*	

05 12 23 00-0796 Flat Steel Plate *(05 12 23 00-0422)*

05 12 23 00-0797	SF	1/8" Thick Flat Steel Plate	18.60	7.22
		For 304 Stainless Steel, Add	*22.12*	
		For 316 Stainless Steel, Add	*24.83*	
		For Aluminum, Add	*1.40*	
		For Galvanized Steel, Add	*4.81*	
05 12 23 00-0798	SF	3/16" Thick Flat Steel Plate	20.94	7.47
		For 304 Stainless Steel, Add	*27.67*	
		For 316 Stainless Steel, Add	*31.07*	
		For Aluminum, Add	*1.75*	
		For Galvanized Steel, Add	*6.02*	
05 12 23 00-0799	SF	1/4" Thick Flat Steel Plate	24.95	8.38
		For 304 Stainless Steel, Add	*35.28*	
		For 316 Stainless Steel, Add	*39.62*	
		For Aluminum, Add	*2.23*	
		For Galvanized Steel, Add	*7.68*	
05 12 23 00-0800	SF	3/8" Thick Flat Steel Plate	33.58	9.42
		For 304 Stainless Steel, Add	*55.38*	
		For 316 Stainless Steel, Add	*62.18*	
		For Aluminum, Add	*3.50*	
		For Galvanized Steel, Add	*12.05*	
05 12 23 00-0801	SF	1/2" Thick Flat Steel Plate	39.75	10.36
		For 304 Stainless Steel, Add	*68.97*	
		For 316 Stainless Steel, Add	*77.44*	
		For Aluminum, Add	*4.36*	
		For Galvanized Steel, Add	*15.00*	
05 12 23 00-0802	SF	3/4" Thick Flat Steel Plate	64.85	12.84
		For 304 Stainless Steel, Add	*129.39*	
		For 316 Stainless Steel, Add	*145.28*	
		For Aluminum, Add	*8.17*	
		For Galvanized Steel, Add	*28.15*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 12 23 00-0803	SF	1" Thick Flat Steel Plate	86.47	16.05
		For 304 Stainless Steel, Add	*177.16*	
		For 316 Stainless Steel, Add	*198.91*	
		For Aluminum, Add	*11.19*	
		For Galvanized Steel, Add	*38.54*	

05 13 Structural Stainless-Steel Framing *(05 10)*

05 13 00 00-0001 Stainless Steel Tube *(05 13)*

05 13 00 00-0002	LF	1" x 1" Stainless Steel Tube	39.52	
05 13 00 00-0003	LF	1-1/2" x 1-1/2" Stainless Steel Tube	51.29	
05 13 00 00-0004	LF	2" x 2" Stainless Steel Tube	69.91	

05 14 Structural Aluminum Framing *(05 10)*

05 14 13 Architecturally-Exposed Structural Aluminum Framing *(05 14)*

05 14 13 00-0001 Rolled Or Plate Shapes *(05 14 13)*

Note: 1" through 10" member.

05 14 13 00-0002	LB	Structural Aluminum, Up To 2,000 Lb. / Order 1" To 10" Rolled / Plate Structural Members	11.97	0.98
05 14 13 00-0003	LB	Structural Aluminum, >2,000 - 9,999 Lb. / Order 1" To 10" Rolled / Plate Structural Members	10.53	0.91

05 14 13 00-0004 Aluminum Extrusions *(05 14 13)*

05 14 13 00-0005	LB	Aluminum Extrusions, Stock Shapes 1" To 10" Rolled / Plate Structural Members	18.75	4.04
05 14 13 00-0006	LB	Aluminum Extrusions, Custom Shapes 1" To 10" Rolled / Plate Structural Members	19.95	4.04

05 14 13 00-0007 Aluminum Tubing *(05 14 13)*

05 14 13 00-0008	LB	Aluminum Extrusions, Tubular Shapes 1" To 10" Rolled / Plate Structural Members	16.97	2.47
05 14 13 00-0009	LF	1" x 1" Aluminum Tubing, 1/8" Wall Thickness	14.35	3.99
05 14 13 00-0010	LF	1-1/4" x 1-1/4" Aluminum Tubing, 1/8" Wall Thickness	17.57	4.36
05 14 13 00-0011	LF	1-1/2" x 1-1/2" Aluminum Tubing, 1/8" Wall Thickness	20.14	5.08
05 14 13 00-0012	LF	2" x 2" Aluminum Tubing, 1/8" Wall Thickness	24.24	5.46
05 14 13 00-0013	LF	4" x 4" Aluminum Tubing, 1/4" Wall Thickness	75.22	6.91
05 14 13 00-0014	LF	2" x 5" Aluminum Tubing, 1/4" Wall Thickness	61.36	6.18

05 14 13 00-0015 Columns *(05 14 13)*

Note: Baked on paint finish, load bearing.

05 14 13 00-0016 Round Columns *(05 14 13 00-0015)*

05 14 13 00-0017	LF	6" Diameter Aluminum Column	68.22	7.81
05 14 13 00-0018	LF	8" Diameter Aluminum Column	90.73	11.19
05 14 13 00-0019	LF	10" Diameter Aluminum Column	111.43	12.59
05 14 13 00-0020	LF	12" Diameter Aluminum Column	171.05	13.17
05 14 13 00-0021	LF	15" Diameter Aluminum Column	219.32	15.27
05 14 13 00-0022	EA	6" Diameter Aluminum Base And Cap	133.65	14.57
05 14 13 00-0023	EA	8" Diameter Aluminum Base And Cap	153.62	15.73
05 14 13 00-0024	EA	10" Diameter Aluminum Base And Cap	195.52	17.48
05 14 13 00-0025	EA	12" Diameter Aluminum Base And Cap	345.81	18.65
05 14 13 00-0026	EA	15" Diameter Aluminum Base And Cap	535.06	20.40

05 14 13 00-0027 Octagonal Columns *(05 14 13 00-0015)*

05 14 13 00-0028	LF	6" Diameter Aluminum Column	77.06	7.81
05 14 13 00-0029	LF	8" Diameter Aluminum Column	104.40	11.19
05 14 13 00-0030	LF	10" Diameter Aluminum Column	128.68	12.59
05 14 13 00-0031	LF	12" Diameter Aluminum Column	200.02	13.17
05 14 13 00-0032	LF	15" Diameter Aluminum Column	257.10	15.27
05 14 13 00-0033	EA	6" Diameter Aluminum Base And Cap	154.55	14.57
05 14 13 00-0034	EA	8" Diameter Aluminum Base And Cap	178.05	15.73
05 14 13 00-0035	EA	10" Diameter Aluminum Base And Cap	227.63	17.48
05 14 13 00-0036	EA	12" Diameter Aluminum Base And Cap	407.51	18.65
05 14 13 00-0037	EA	15" Diameter Aluminum Base And Cap	633.91	20.40

05 14 13 00-0038 Fluted Columns *(05 14 13 00-0015)*

05 14 13 00-0039	LF	6" Diameter Aluminum Column	86.29	7.81
05 14 13 00-0040	LF	8" Diameter Aluminum Column	116.69	11.19
05 14 13 00-0041	LF	10" Diameter Aluminum Column	144.21	12.59
05 14 13 00-0042	LF	12" Diameter Aluminum Column	226.08	13.17
05 14 13 00-0043	LF	15" Diameter Aluminum Column	291.10	15.27
05 14 13 00-0044	EA	6" Diameter Aluminum Base And Cap	173.37	14.57
05 14 13 00-0045	EA	8" Diameter Aluminum Base And Cap	200.03	15.73
05 14 13 00-0046	EA	10" Diameter Aluminum Base And Cap	256.53	17.48
05 14 13 00-0047	EA	12" Diameter Aluminum Base And Cap	463.04	18.65
05 14 13 00-0048	EA	15" Diameter Aluminum Base And Cap	722.88	20.40

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 14 13 00-0049		Square Columns *(05 14 13 00-0015)*		
05 14 13 00-0050	LF	6" Aluminum Column	92.61	7.81
05 14 13 00-0051	LF	8" Aluminum Column	125.10	11.19
05 14 13 00-0052	LF	10" Aluminum Column	154.83	12.59
05 14 13 00-0053	LF	12" Aluminum Column	243.91	13.17
05 14 13 00-0054	LF	15" Aluminum Column	314.35	15.27
05 14 13 00-0055	EA	6" Aluminum Base And Cap	186.23	14.57
05 14 13 00-0056	EA	8" Aluminum Base And Cap	215.07	15.73
05 14 13 00-0057	EA	10" Aluminum Base And Cap	276.29	17.48
05 14 13 00-0058	EA	12" Aluminum Base And Cap	501.02	18.65
05 14 13 00-0059	EA	15" Aluminum Base And Cap	783.71	20.40
05 14 13 00-0060		Ornamental Or Decorative Cap And Bases *(05 14 13 00-0015)*		
05 14 13 00-0061	EA	8" Corinthian Capital And Base	1,099.03	17.48
05 14 13 00-0062	EA	10" Corinthian Capital And Base	1,620.99	20.40
05 14 13 00-0063	EA	12" Corinthian Capital And Base	2,570.38	23.31
05 14 13 00-0064	EA	8" Scamozzi Capital And Base	539.71	17.48
05 14 13 00-0065	EA	10" Scamozzi Capital And Base	725.17	20.40
05 14 13 00-0066	EA	12" Scamozzi Capital And Base	1,470.84	23.31

05 15 Wire Rope Assemblies *(05 10)*

05 15 16 Steel Wire Rope Assemblies *(05 15)*

05 15 16 00-0001		6x19, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope *(05 15 16)*		
05 15 16 00-0002	LF	1/4" Diameter, 6x19, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	1.68	0.12
		For >500, Deduct	*-0.29*	
05 15 16 00-0003	LF	5/16" Diameter, 6x19, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	2.25	0.12
		For >500, Deduct	*-0.39*	
05 15 16 00-0004	LF	3/8" Diameter, 6x19, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	2.68	0.24
		For >500, Deduct	*-0.44*	
05 15 16 00-0005	LF	7/16" Diameter, 6x19, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	3.23	0.24
		For >500, Deduct	*-0.52*	
05 15 16 00-0006	LF	1/2" Diameter, 6x19, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	3.74	0.36
		For >500, Deduct	*-0.58*	
05 15 16 00-0007	LF	9/16" Diameter, 6x19, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	4.59	0.48
		For >500, Deduct	*-0.71*	
05 15 16 00-0008	LF	5/8" Diameter, 6x19, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	5.49	0.48
		For >500, Deduct	*-0.84*	
05 15 16 00-0009	LF	3/4" Diameter, 6x19, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	7.61	0.84
		For >500, Deduct	*-1.14*	
05 15 16 00-0010	LF	7/8" Diameter, 6x19, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	10.23	0.96
		For >500, Deduct	*-1.53*	
05 15 16 00-0011	LF	1" Diameter, 6x19, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	12.75	1.32
		For >500, Deduct	*-1.87*	
05 15 16 00-0012	LF	1-1/8" Diameter, 6x19, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	15.76	1.68
		For >500, Deduct	*-2.31*	
05 15 16 00-0013	LF	1-1/4" Diameter, 6x19, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	19.21	2.03
		For >500, Deduct	*-2.81*	
05 15 16 00-0014		6x37, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope *(05 15 16)*		
05 15 16 00-0015	LF	1/4" Diameter, 6x37, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	1.97	0.12
		For >500, Deduct	*-0.35*	
05 15 16 00-0016	LF	5/16" Diameter, 6x37, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	2.55	0.12
		For >500, Deduct	*-0.45*	
05 15 16 00-0017	LF	3/8" Diameter, 6x37, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	3.16	0.24
		For >500, Deduct	*-0.54*	
05 15 16 00-0018	LF	7/16" Diameter, 6x37, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	3.60	0.24
		For >500, Deduct	*-0.59*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 15 16 00-0019	LF	1/2" Diameter, 6x37, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	4.28	0.36
		For >500, Deduct	*-0.69*	
05 15 16 00-0020	LF	9/16" Diameter, 6x37, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	4.94	0.48
		For >500, Deduct	*-0.78*	
05 15 16 00-0021	LF	5/8" Diameter, 6x37, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	5.78	0.48
		For >500, Deduct	*-0.90*	
05 15 16 00-0022	LF	3/4" Diameter, 6x37, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	8.48	0.84
		For >500, Deduct	*-1.32*	
05 15 16 00-0023	LF	7/8" Diameter, 6x37, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	10.87	0.96
		For >500, Deduct	*-1.66*	
05 15 16 00-0024	LF	1" Diameter, 6x37, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	13.39	1.32
		For >500, Deduct	*-2.01*	
05 15 16 00-0025	LF	1-1/8" Diameter, 6x37, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	17.13	1.68
		For >500, Deduct	*-2.57*	
05 15 16 00-0026	LF	1-1/4" Diameter, 6x37, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	20.85	2.03
		For >500, Deduct	*-3.14*	

05 15 16 00-0027 6x19, Fiber Core (FC), Improved Plow Steel (IPS), Bright Finish, Wire Rope *(05 15 16)*

05 15 16 00-0028	LF	1/4" Diameter, 6x19, Fiber Core (FC), Improved Plow Steel (IPS), Bright Finish, Wire Rope	1.56	0.12
		For >500, Deduct	*-0.27*	
05 15 16 00-0029	LF	5/16" Diameter, 6x19, Fiber Core (FC), Improved Plow Steel (IPS), Bright Finish, Wire Rope	2.12	0.12
		For >500, Deduct	*-0.36*	
05 15 16 00-0030	LF	3/8" Diameter, 6x19, Fiber Core (FC), Improved Plow Steel (IPS), Bright Finish, Wire Rope	2.52	0.24
		For >500, Deduct	*-0.41*	
05 15 16 00-0031	LF	7/16" Diameter, 6x19, Fiber Core (FC), Improved Plow Steel (IPS), Bright Finish, Wire Rope	2.96	0.24
		For >500, Deduct	*-0.47*	
05 15 16 00-0032	LF	1/2" Diameter, 6x19, Fiber Core (FC), Improved Plow Steel (IPS), Bright Finish, Wire Rope	3.57	0.36
		For >500, Deduct	*-0.55*	
05 15 16 00-0033	LF	9/16" Diameter, 6x19, Fiber Core (FC), Improved Plow Steel (IPS), Bright Finish, Wire Rope	4.52	0.48
		For >500, Deduct	*-0.69*	
05 15 16 00-0034	LF	5/8" Diameter, 6x19, Fiber Core (FC), Improved Plow Steel (IPS), Bright Finish, Wire Rope	5.27	0.48
		For >500, Deduct	*-0.79*	
05 15 16 00-0035	LF	3/4" Diameter, 6x19, Fiber Core (FC), Improved Plow Steel (IPS), Bright Finish, Wire Rope	7.41	0.84
		For >500, Deduct	*-1.10*	
05 15 16 00-0036	LF	7/8" Diameter, 6x19, Fiber Core (FC), Improved Plow Steel (IPS), Bright Finish, Wire Rope	9.09	0.96
		For >500, Deduct	*-1.31*	
05 15 16 00-0037	LF	1" Diameter, 6x19, Fiber Core (FC), Improved Plow Steel (IPS), Bright Finish, Wire Rope	11.55	1.32
		For >500, Deduct	*-1.63*	

05 15 16 00-0038 6x37, Fiber Core (FC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope *(05 15 16)*

05 15 16 00-0039	LF	1/4" Diameter, 6x37, Fiber Core (FC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	1.54	0.12
		For >500, Deduct	*-0.27*	
05 15 16 00-0040	LF	5/16" Diameter, 6x37, Fiber Core (FC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	2.04	0.12
		For >500, Deduct	*-0.34*	
05 15 16 00-0041	LF	3/8" Diameter, 6x37, Fiber Core (FC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	2.52	0.24
		For >500, Deduct	*-0.41*	
05 15 16 00-0042	LF	7/16" Diameter, 6x37, Fiber Core (FC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	2.96	0.24
		For >500, Deduct	*-0.47*	
05 15 16 00-0043	LF	1/2" Diameter, 6x37, Fiber Core (FC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	3.72	0.36
		For >500, Deduct	*-0.58*	
05 15 16 00-0044	LF	9/16" Diameter, 6x37, Fiber Core (FC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	4.44	0.48
		For >500, Deduct	*-0.68*	
05 15 16 00-0045	LF	5/8" Diameter, 6x37, Fiber Core (FC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	5.56	0.48
		For >500, Deduct	*-0.85*	
05 15 16 00-0046	LF	3/4" Diameter, 6x37, Fiber Core (FC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	7.76	0.84
		For >500, Deduct	*-1.17*	
05 15 16 00-0047	LF	7/8" Diameter, 6x37, Fiber Core (FC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	10.16	0.96
		For >500, Deduct	*-1.52*	
05 15 16 00-0048	LF	1" Diameter, 6x37, Fiber Core (FC), Extra Improved Plow Steel (EIPS), Bright Finish, Wire Rope	12.53	1.32
		For >500, Deduct	*-1.84*	

05 15 16 00-0049 6x19, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Galvanized Finish, Wire Rope *(05 15 16)*

05 15 16 00-0050	LF	3/8" Diameter, 6x19, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Galvanized Finish, Wire Rope	2.85	0.24
		For >500, Deduct	*-0.48*	
05 15 16 00-0051	LF	7/16" Diameter, 6x19, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Galvanized Finish, Wire Rope	3.34	0.24
		For >500, Deduct	*-0.54*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 15 16 00-0052	LF	1/2" Diameter, 6x19, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Galvanized Finish, Wire Rope	3.91	0.36
		For >500, Deduct	*-0.62*	
05 15 16 00-0053	LF	9/16" Diameter, 6x19, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Galvanized Finish, Wire Rope	5.27	0.48
		For >500, Deduct	*-0.84*	
05 15 16 00-0054	LF	5/8" Diameter, 6x19, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Galvanized Finish, Wire Rope	5.82	0.48
		For >500, Deduct	*-0.90*	
05 15 16 00-0055	LF	3/4" Diameter, 6x19, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Galvanized Finish, Wire Rope	7.94	0.84
		For >500, Deduct	*-1.21*	
05 15 16 00-0056	LF	7/8" Diameter, 6x19, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Galvanized Finish, Wire Rope	10.19	0.96
		For >500, Deduct	*-1.53*	
05 15 16 00-0057	LF	1" Diameter, 6x19, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Galvanized Finish, Wire Rope	13.43	1.32
		For >500, Deduct	*-2.01*	
05 15 16 00-0058	LF	1-1/8" Diameter, 6x19, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Galvanized Finish, Wire Rope	16.27	1.68
		For >500, Deduct	*-2.41*	
05 15 16 00-0059	LF	1-1/4" Diameter, 6x19, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Galvanized Finish, Wire Rope	19.64	2.03
		For >500, Deduct	*-2.90*	

05 15 16 00-0060 6x37, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Galvanized Finish, Wire Rope *(05 15 16)*

05 15 16 00-0061	LF	3/8" Diameter, 6x37, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Galvanized Finish, Wire Rope	2.93	0.24
		For >500, Deduct	*-0.49*	
05 15 16 00-0062	LF	7/16" Diameter, 6x37, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Galvanized Finish, Wire Rope	3.54	0.24
		For >500, Deduct	*-0.58*	
05 15 16 00-0063	LF	1/2" Diameter, 6x37, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Galvanized Finish, Wire Rope	4.19	0.36
		For >500, Deduct	*-0.67*	
05 15 16 00-0064	LF	9/16" Diameter, 6x37, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Galvanized Finish, Wire Rope	5.85	0.48
		For >500, Deduct	*-0.96*	
05 15 16 00-0065	LF	5/8" Diameter, 6x37, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Galvanized Finish, Wire Rope	5.91	0.48
		For >500, Deduct	*-0.92*	
05 15 16 00-0066	LF	3/4" Diameter, 6x37, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Galvanized Finish, Wire Rope	8.13	0.84
		For >500, Deduct	*-1.25*	
05 15 16 00-0067	LF	7/8" Diameter, 6x37, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Galvanized Finish, Wire Rope	10.78	0.96
		For >500, Deduct	*-1.64*	
05 15 16 00-0068	LF	1" Diameter, 6x37, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Galvanized Finish, Wire Rope	13.62	1.32
		For >500, Deduct	*-2.05*	

05 15 16 00-0069 19x7, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Rotation Resistant Wire Rope *(05 15 16)*

05 15 16 00-0070	LF	1/4" Diameter, 19x7, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Rotation Resistant Wire Rope	3.02	0.12
		For >500, Deduct	*-0.56*	
05 15 16 00-0071	LF	5/16" Diameter, 19x7, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Rotation Resistant Wire Rope	3.25	0.12
		For >500, Deduct	*-0.59*	
05 15 16 00-0072	LF	3/8" Diameter, 19x7, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Rotation Resistant Wire Rope	3.83	0.24
		For >500, Deduct	*-0.68*	
05 15 16 00-0073	LF	7/16" Diameter, 19x7, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Rotation Resistant Wire Rope	5.15	0.24
		For >500, Deduct	*-0.90*	
05 15 16 00-0074	LF	1/2" Diameter, 19x7, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Rotation Resistant Wire Rope	5.87	0.24
		For >500, Deduct	*-1.05*	
05 15 16 00-0075	LF	9/16" Diameter, 19x7, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Rotation Resistant Wire Rope	6.79	0.48
		For >500, Deduct	*-1.15*	
05 15 16 00-0076	LF	5/8" Diameter, 19x7, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Rotation Resistant Wire Rope	8.08	0.48
		For >500, Deduct	*-1.36*	
05 15 16 00-0077	LF	3/4" Diameter, 19x7, Independent Wire Rope Core (IWRC), Extra Improved Plow Steel (EIPS), Bright Finish, Rotation Resistant Wire Rope	11.13	0.71
		For >500, Deduct	*-1.86*	

05 15 16 00-0078 7x7, Galvanized Finish, Aircraft Cable *(05 15 16)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 15 16 00-0079	LF	1/16" Diameter, 7x7, Galvanized Finish, Aircraft Cable	0.34	0.08
		For >500, Deduct	*-0.04*	
05 15 16 00-0080	LF	3/32" Diameter, 7x7, Galvanized Finish, Aircraft Cable	0.39	0.10
		For >500, Deduct	*-0.05*	
05 15 16 00-0081	LF	1/8" Diameter, 7x7, Galvanized Finish, Aircraft Cable	0.44	0.11
		For >500, Deduct	*-0.05*	
05 15 16 00-0082	LF	5/32" Diameter, 7x7, Galvanized Finish, Aircraft Cable	0.51	0.12
		For >500, Deduct	*-0.06*	
05 15 16 00-0083	LF	3/16" Diameter, 7x7, Galvanized Finish, Aircraft Cable	0.63	0.12
		For >500, Deduct	*-0.08*	
05 15 16 00-0084		7x19, Galvanized Finish, Aircraft Cable *(05 15 16)*		
05 15 16 00-0085	LF	1/8" Diameter, 7x19, Galvanized Finish, Aircraft Cable	0.62	0.11
		For >500, Deduct	*-0.09*	
05 15 16 00-0086	LF	5/32" Diameter, 7x19, Galvanized Finish, Aircraft Cable	0.67	0.12
		For >500, Deduct	*-0.10*	
05 15 16 00-0087	LF	3/16" Diameter, 7x19, Galvanized Finish, Aircraft Cable	0.77	0.12
		For >500, Deduct	*-0.11*	
05 15 16 00-0088	LF	1/4" Diameter, 7x19, Galvanized Finish, Aircraft Cable	0.90	0.12
		For >500, Deduct	*-0.14*	
05 15 16 00-0089	LF	5/16" Diameter, 7x19, Galvanized Finish, Aircraft Cable	1.36	0.12
		For >500, Deduct	*-0.21*	
05 15 16 00-0090	LF	3/8" Diameter, 7x19, Galvanized Finish, Aircraft Cable	1.82	0.12
		For >500, Deduct	*-0.27*	
05 15 16 00-0091		Heavy-Duty, Galvanized Steel, Wire Rope Thimbles *(05 15 16)*		
05 15 16 00-0092	EA	1/4" Diameter, Heavy-Duty, Galvanized Steel, Wire Rope Thimble	15.39	3.59
05 15 16 00-0093	EA	5/16" Diameter, Heavy-Duty, Galvanized Steel, Wire Rope Thimble	17.50	3.59
05 15 16 00-0094	EA	3/8" Diameter, Heavy-Duty, Galvanized Steel, Wire Rope Thimble	19.84	3.59
05 15 16 00-0095	EA	7/16" Diameter, Heavy-Duty, Galvanized Steel, Wire Rope Thimble	26.27	3.59
05 15 16 00-0096	EA	1/2" Diameter, Heavy-Duty, Galvanized Steel, Wire Rope Thimble	26.30	3.59
05 15 16 00-0097	EA	9/16" Diameter, Heavy-Duty, Galvanized Steel, Wire Rope Thimble	26.30	3.59
05 15 16 00-0098	EA	5/8" Diameter, Heavy-Duty, Galvanized Steel, Wire Rope Thimble	28.48	3.59
05 15 16 00-0099	EA	3/4" Diameter, Heavy-Duty, Galvanized Steel, Wire Rope Thimble	52.11	5.51
05 15 16 00-0100	EA	7/8" Diameter, Heavy-Duty, Galvanized Steel, Wire Rope Thimble	61.48	6.71
05 15 16 00-0101	EA	1" Diameter, Heavy-Duty, Galvanized Steel, Wire Rope Thimble	109.52	11.01
05 15 16 00-0102	EA	1-1/8" Diameter, Heavy-Duty, Galvanized Steel, Wire Rope Thimble	157.31	14.97
05 15 16 00-0103	EA	1-1/4" Diameter, Heavy-Duty, Galvanized Steel, Wire Rope Thimble	157.31	14.97
05 15 16 00-0104		Galvanized Steel, Wire Rope Clips *(05 15 16)*		
05 15 16 00-0105	EA	1/8" Diameter, Galvanized Steel, Wire Rope Clip	18.79	3.59
05 15 16 00-0106	EA	3/16" Diameter, Galvanized Steel, Wire Rope Clip	19.21	3.59
05 15 16 00-0107	EA	1/4" Diameter, Galvanized Steel, Wire Rope Clip	22.09	3.59
05 15 16 00-0108	EA	5/16" Diameter, Galvanized Steel, Wire Rope Clip	22.54	3.59
05 15 16 00-0109	EA	3/8" Diameter, Galvanized Steel, Wire Rope Clip	23.19	3.59
05 15 16 00-0110	EA	7/16" Diameter, Galvanized Steel, Wire Rope Clip	29.38	3.59
05 15 16 00-0111	EA	1/2" Diameter, Galvanized Steel, Wire Rope Clip	29.85	3.59
05 15 16 00-0112	EA	9/16" Diameter, Galvanized Steel, Wire Rope Clip	34.30	3.59
05 15 16 00-0113	EA	5/8" Diameter, Galvanized Steel, Wire Rope Clip	34.95	3.59
05 15 16 00-0114	EA	3/4" Diameter, Galvanized Steel, Wire Rope Clip	47.75	4.79
05 15 16 00-0115	EA	7/8" Diameter, Galvanized Steel, Wire Rope Clip	71.29	7.19
05 15 16 00-0116	EA	1" Diameter, Galvanized Steel, Wire Rope Clip	78.58	7.19
05 15 16 00-0117	EA	1-1/8" Diameter, Galvanized Steel, Wire Rope Clip	92.09	9.58
05 15 16 00-0118	EA	1-1/4" Diameter, Galvanized Steel, Wire Rope Clip	133.73	14.38
05 15 16 00-0119		Steel, Open Swage Sockets *(05 15 16)*		
05 15 16 00-0120	EA	1/4" Diameter, Steel, Open Swage Socket	104.93	3.59
05 15 16 00-0121	EA	5/16" Diameter, Steel, Open Swage Socket	167.70	3.59
05 15 16 00-0122	EA	3/8" Diameter, Steel, Open Swage Socket	172.43	4.79
05 15 16 00-0123	EA	7/16" Diameter, Steel, Open Swage Socket	204.82	5.99
05 15 16 00-0124	EA	1/2" Diameter, Steel, Open Swage Socket	204.82	5.99
05 15 16 00-0125	EA	9/16" Diameter, Steel, Open Swage Socket	298.52	13.18
05 15 16 00-0126	EA	5/8" Diameter, Steel, Open Swage Socket	298.52	13.18
05 15 16 00-0127	EA	3/4" Diameter, Steel, Open Swage Socket	379.48	25.15
05 15 16 00-0128	EA	7/8" Diameter, Steel, Open Swage Socket	510.38	35.93
05 15 16 00-0129	EA	1" Diameter, Steel, Open Swage Socket	717.22	55.09
05 15 16 00-0130	EA	1-1/8" Diameter, Steel, Open Swage Socket	938.21	86.23
05 15 16 00-0131	EA	1-1/4" Diameter, Steel, Open Swage Socket	1,092.31	99.41
05 15 16 00-0132		Steel, Closed Swage Sockets *(05 15 16)*		
05 15 16 00-0133	EA	1/4" Diameter, Steel, Closed Swage Socket	84.25	3.59
05 15 16 00-0134	EA	5/16" Diameter, Steel, Closed Swage Socket	114.33	3.59
05 15 16 00-0135	EA	3/8" Diameter, Steel, Closed Swage Socket	114.33	3.59
05 15 16 00-0136	EA	7/16" Diameter, Steel, Closed Swage Socket	142.38	4.79
05 15 16 00-0137	EA	1/2" Diameter, Steel, Closed Swage Socket	143.69	4.79
05 15 16 00-0138	EA	9/16" Diameter, Steel, Closed Swage Socket	196.56	8.39

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 15 16 00-0139	EA	5/8" Diameter, Steel, Closed Swage Socket	202.26	9.58
05 15 16 00-0140	EA	3/4" Diameter, Steel, Closed Swage Socket	249.46	15.56
05 15 16 00-0141	EA	7/8" Diameter, Steel, Closed Swage Socket	321.73	22.75
05 15 16 00-0142	EA	1" Diameter, Steel, Closed Swage Socket	460.22	31.14
05 15 16 00-0143	EA	1-1/8" Diameter, Steel, Closed Swage Socket	569.42	43.12
05 15 16 00-0144	EA	1-1/4" Diameter, Steel, Closed Swage Socket	769.66	67.07

05 15 16 00-0145 Galvanized Steel, Open Spelter Sockets *(05 15 16)*

05 15 16 00-0146	EA	1/4" Galvanized Steel, Open Spelter Socket	176.23	3.59
05 15 16 00-0147	EA	5/16" Galvanized Steel, Open Spelter Socket	180.54	3.59
05 15 16 00-0148	EA	3/8" Galvanized Steel, Open Spelter Socket	180.54	3.59
05 15 16 00-0149	EA	7/16" Galvanized Steel, Open Spelter Socket	201.00	7.19
05 15 16 00-0150	EA	1/2" Galvanized Steel, Open Spelter Socket	201.00	7.19
05 15 16 00-0151	EA	9/16" Galvanized Steel, Open Spelter Socket	262.84	11.98
05 15 16 00-0152	EA	5/8" Galvanized Steel, Open Spelter Socket	262.84	11.98
05 15 16 00-0153	EA	3/4" Galvanized Steel, Open Spelter Socket	332.03	17.96
05 15 16 00-0154	EA	7/8" Galvanized Steel, Open Spelter Socket	495.97	29.94
05 15 16 00-0155	EA	1" Galvanized Steel, Open Spelter Socket	904.31	46.70
05 15 16 00-0156	EA	1-1/8" Galvanized Steel, Open Spelter Socket	1,057.25	75.45
05 15 16 00-0157	EA	1-1/4" Galvanized Steel, Open Spelter Socket	1,429.44	99.41

05 15 16 00-0158 Galvanized Steel, Closed Spelter Sockets *(05 15 16)*

05 15 16 00-0159	EA	1/4" Galvanized Steel, Closed Spelter Socket	147.62	3.59
05 15 16 00-0160	EA	5/16" Galvanized Steel, Closed Spelter Socket	148.19	3.59
05 15 16 00-0161	EA	3/8" Galvanized Steel, Closed Spelter Socket	148.19	3.59
05 15 16 00-0162	EA	7/16" Galvanized Steel, Closed Spelter Socket	165.52	5.99
05 15 16 00-0163	EA	1/2" Galvanized Steel, Closed Spelter Socket	165.52	5.99
05 15 16 00-0164	EA	9/16" Galvanized Steel, Closed Spelter Socket	230.88	10.78
05 15 16 00-0165	EA	5/8" Galvanized Steel, Closed Spelter Socket	230.88	10.78
05 15 16 00-0166	EA	3/4" Galvanized Steel, Closed Spelter Socket	282.28	15.56
05 15 16 00-0167	EA	7/8" Galvanized Steel, Closed Spelter Socket	411.89	23.95
05 15 16 00-0168	EA	1" Galvanized Steel, Closed Spelter Socket	621.68	37.13
05 15 16 00-0169	EA	1-1/8" Galvanized Steel, Closed Spelter Socket	813.58	50.30
05 15 16 00-0170	EA	1-1/4" Galvanized Steel, Closed Spelter Socket	1,023.98	67.07

05 15 16 00-0171 Forged Steel, Jaw And Jaw Turnbuckles *(05 15 16)*

05 15 16 00-0172	EA	1/4" x 4", Forged Steel, Jaw And Jaw Turnbuckle	101.25	3.59
		For "Eye And Eye" Or "Hook and Hook" Turnbuckle, Deduct	*-13.39*	
05 15 16 00-0173	EA	5/16" x 4-1/2", Forged Steel, Jaw And Jaw Turnbuckle	108.68	3.59
		For "Eye And Eye" Or "Hook and Hook" Turnbuckle, Deduct	*-14.51*	
05 15 16 00-0174	EA	3/8" x 6", Forged Steel, Jaw And Jaw Turnbuckle	122.43	3.59
		For "Eye And Eye" Or "Hook and Hook" Turnbuckle, Deduct	*-16.57*	
05 15 16 00-0175	EA	1/2" x 6", Forged Steel, Jaw And Jaw Turnbuckle	135.03	4.79
		For "Eye And Eye" Or "Hook and Hook" Turnbuckle, Deduct	*-17.24*	
05 15 16 00-0176	EA	1/2" x 9", Forged Steel, Jaw And Jaw Turnbuckle	177.86	5.99
		For "Eye And Eye" Or "Hook and Hook" Turnbuckle, Deduct	*-22.94*	
05 15 16 00-0177	EA	1/2" x 12", Forged Steel, Jaw And Jaw Turnbuckle	202.00	7.19
		For "Eye And Eye" Or "Hook and Hook" Turnbuckle, Deduct	*-25.97*	
05 15 16 00-0178	EA	5/8" x 6", Forged Steel, Jaw And Jaw Turnbuckle	204.88	9.58
		For "Eye And Eye" Or "Hook and Hook" Turnbuckle, Deduct	*-25.20*	
05 15 16 00-0179	EA	5/8" x 9", Forged Steel, Jaw And Jaw Turnbuckle	254.06	9.58
		For "Eye And Eye" Or "Hook and Hook" Turnbuckle, Deduct	*-32.12*	
05 15 16 00-0180	EA	5/8" x 12", Forged Steel, Jaw And Jaw Turnbuckle	288.73	10.78
		For "Eye And Eye" Or "Hook and Hook" Turnbuckle, Deduct	*-36.89*	
05 15 16 00-0181	EA	3/4" x 6", Forged Steel, Jaw And Jaw Turnbuckle	276.14	13.18
		For "Eye And Eye" Or "Hook and Hook" Turnbuckle, Deduct	*-33.78*	
05 15 16 00-0182	EA	3/4" x 9", Forged Steel, Jaw And Jaw Turnbuckle	313.84	15.56
		For "Eye And Eye" Or "Hook and Hook" Turnbuckle, Deduct	*-37.62*	
05 15 16 00-0183	EA	3/4" x 12", Forged Steel, Jaw And Jaw Turnbuckle	388.57	16.76
		For "Eye And Eye" Or "Hook and Hook" Turnbuckle, Deduct	*-48.02*	
05 15 16 00-0184	EA	3/4" x 18", Forged Steel, Jaw And Jaw Turnbuckle	467.44	20.36
		For "Eye And Eye" Or "Hook and Hook" Turnbuckle, Deduct	*-57.73*	
05 15 16 00-0185	EA	7/8" x 12", Forged Steel, Jaw And Jaw Turnbuckle	529.92	28.74
		For "Eye And Eye" Or "Hook and Hook" Turnbuckle, Deduct	*-62.38*	
05 15 16 00-0186	EA	7/8" x 18", Forged Steel, Jaw And Jaw Turnbuckle	643.32	33.54
		For "Eye And Eye" Or "Hook and Hook" Turnbuckle, Deduct	*-76.54*	
05 15 16 00-0187	EA	1" x 6", Forged Steel, Jaw And Jaw Turnbuckle	550.96	28.74
		For "Eye And Eye" Or "Hook and Hook" Turnbuckle, Deduct	*-65.54*	
05 15 16 00-0188	EA	1" x 12", Forged Steel, Jaw And Jaw Turnbuckle	628.40	37.13
		For "Eye And Eye" Or "Hook and Hook" Turnbuckle, Deduct	*-71.80*	
05 15 16 00-0189	EA	1" x 18", Forged Steel, Jaw And Jaw Turnbuckle	863.86	46.70
		For "Eye And Eye" Or "Hook and Hook" Turnbuckle, Deduct	*-101.94*	
05 15 16 00-0190	EA	1" x 24", Forged Steel, Jaw And Jaw Turnbuckle	964.78	55.09
		For "Eye And Eye" Or "Hook and Hook" Turnbuckle, Deduct	*-112.05*	
05 15 16 00-0191	EA	1-1/4" x 12", Forged Steel, Jaw And Jaw Turnbuckle	1,072.53	67.07
		For "Eye And Eye" Or "Hook and Hook" Turnbuckle, Deduct	*-120.96*	
05 15 16 00-0192	EA	1-1/4" x 18", Forged Steel, Jaw And Jaw Turnbuckle	1,297.28	75.45
		For "Eye And Eye" Or "Hook and Hook" Turnbuckle, Deduct	*-149.68*	

copyright 2026 The Gordian Group, Inc.

CSI	MINOR UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 15 16 00-0193	EA	1-1/4" x 24", Forged Steel, Jaw And Jaw Turnbuckle	1,685.25	86.23
		For "Eye And Eye" Or "Hook and Hook" Turnbuckle, Deduct	*-201.46*	
05 15 16 00-0194	EA	1-1/2" x 12", Forged Steel, Jaw And Jaw Turnbuckle	1,663.03	92.22
		For "Eye And Eye" Or "Hook and Hook" Turnbuckle, Deduct	*-194.18*	
05 15 16 00-0195	EA	1-1/2" x 18", Forged Steel, Jaw And Jaw Turnbuckle	1,822.13	119.76
		For "Eye And Eye" Or "Hook and Hook" Turnbuckle, Deduct	*-201.46*	
05 15 16 00-0196	EA	1-1/2" x 24", Forged Steel, Jaw And Jaw Turnbuckle	3,309.24	155.70
		For "Eye And Eye" Or "Hook and Hook" Turnbuckle, Deduct	*-406.56*	
05 15 16 00-0197	EA	2" x 24", Forged Steel, Jaw And Jaw Turnbuckle	5,404.84	299.41
		For "Eye And Eye" Or "Hook and Hook" Turnbuckle, Deduct	*-631.08*	

05 15 16 00-0198 Galvanized Steel, Drop Forged, Shoulder Eye Bolts *(05 15 16)*

05 15 16 00-0199	EA	1/4" Diameter Thread, 3/4" Inside Eye Diameter, Galvanized Steel, Drop Forged, Shoulder Eye Bolt	21.72
05 15 16 00-0200	EA	5/16" Diameter Thread, 7/8" Inside Eye Diameter, Galvanized Steel, Drop Forged, Shoulder Eye Bolt	21.82
05 15 16 00-0201	EA	3/8" Diameter Thread, 1" Inside Eye Diameter, Galvanized Steel, Drop Forged, Shoulder Eye Bolt	24.62
05 15 16 00-0202	EA	7/16" Diameter Thread, 1-3/32" Inside Eye Diameter, Galvanized Steel, Drop Forged, Shoulder Eye Bolt	29.41
05 15 16 00-0203	EA	1/2" Diameter Thread, 1-3/16" Inside Eye Diameter, Galvanized Steel, Drop Forged, Shoulder Eye Bolt	29.28
05 15 16 00-0204	EA	5/8" Diameter Thread, 1-3/8" Inside Eye Diameter, Galvanized Steel, Drop Forged, Shoulder Eye Bolt	40.09
05 15 16 00-0205	EA	3/4" Diameter Thread, 1-1/2" Inside Eye Diameter, Galvanized Steel, Drop Forged, Shoulder Eye Bolt	48.21
05 15 16 00-0206	EA	7/8" Diameter Thread, 1-11/16" Inside Eye Diameter, Galvanized Steel, Drop Forged, Shoulder Eye Bolt	65.22
05 15 16 00-0207	EA	1" Diameter Thread, 1-13/16" Inside Eye Diameter, Galvanized Steel, Drop Forged, Shoulder Eye Bolt	87.58
05 15 16 00-0208	EA	1-1/8" Diameter Thread, 2" Inside Eye Diameter, Galvanized Steel, Drop Forged, Shoulder Eye Bolt	127.55
05 15 16 00-0209	EA	1-1/4" Diameter Thread, 2-3/16" Inside Eye Diameter, Galvanized Steel, Drop Forged, Shoulder Eye Bolt	151.78
05 15 16 00-0210	EA	1-1/2" Diameter Thread, 2-1/2" Inside Eye Diameter, Galvanized Steel, Drop Forged, Shoulder Eye Bolt	276.18
05 15 16 00-0211	EA	1-3/4" Diameter Thread, 2-7/8" Inside Eye Diameter, Galvanized Steel, Drop Forged, Shoulder Eye Bolt	316.78
05 15 16 00-0212	EA	2" Diameter Thread, 3-1/4" Inside Eye Diameter, Galvanized Steel, Drop Forged, Shoulder Eye Bolt	391.85

05 15 16 00-0213 Galvanized Steel, Drop Forged, Eye Bolts *(05 15 16)*

05 15 16 00-0214	EA	1/4" Diameter Thread, 3" Shank Length, 1/2" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	28.62
05 15 16 00-0215	EA	1/4" Diameter Thread, 4" Shank Length, 1/2" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	25.80
05 15 16 00-0216	EA	5/16" Diameter Thread, 2-1/4" Shank Length, 5/8" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	35.09
05 15 16 00-0217	EA	5/16" Diameter Thread, 4-1/4" Shank Length, 5/8" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	23.47
05 15 16 00-0218	EA	3/8" Diameter Thread, 2-1/2" Shank Length, 3/4" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	31.78
05 15 16 00-0219	EA	3/8" Diameter Thread, 3" Shank Length, 3/4" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	48.02
05 15 16 00-0220	EA	3/8" Diameter Thread, 4" Shank Length, 3/4" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	46.53
05 15 16 00-0221	EA	3/8" Diameter Thread, 4-1/2" Shank Length, 3/4" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	44.21
05 15 16 00-0222	EA	3/8" Diameter Thread, 5" Shank Length, 3/4" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	39.60
05 15 16 00-0223	EA	3/8" Diameter Thread, 6" Shank Length, 3/4" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	40.90
05 15 16 00-0224	EA	1/2" Diameter Thread, 2" Shank Length, 1" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	36.11
05 15 16 00-0225	EA	1/2" Diameter Thread, 3" Shank Length, 1" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	28.73
05 15 16 00-0226	EA	1/2" Diameter Thread, 3-1/4" Shank Length, 1" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	37.50
05 15 16 00-0227	EA	1/2" Diameter Thread, 4" Shank Length, 1" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	51.30
05 15 16 00-0228	EA	1/2" Diameter Thread, 4-1/2" Shank Length, 1" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	38.89
05 15 16 00-0229	EA	1/2" Diameter Thread, 6" Shank Length, 1" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	62.74
05 15 16 00-0230	EA	1/2" Diameter Thread, 8" Shank Length, 1" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	55.19
05 15 16 00-0231	EA	1/2" Diameter Thread, 10" Shank Length, 1" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	50.33
05 15 16 00-0232	EA	1/2" Diameter Thread, 12" Shank Length, 1" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	59.25
05 15 16 00-0233	EA	5/8" Diameter Thread, 4" Shank Length, 1-1/4" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	60.12
05 15 16 00-0234	EA	5/8" Diameter Thread, 4-1/2" Shank Length, 1-1/4" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	53.50
05 15 16 00-0235	EA	5/8" Diameter Thread, 6" Shank Length, 1-1/4" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	67.37
05 15 16 00-0236	EA	5/8" Diameter Thread, 8" Shank Length, 1-1/4" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	77.28
05 15 16 00-0237	EA	5/8" Diameter Thread, 10" Shank Length, 1-1/4" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	89.18
05 15 16 00-0238	EA	5/8" Diameter Thread, 12" Shank Length, 1-1/4" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	73.62
05 15 16 00-0239	EA	3/4" Diameter Thread, 4-1/2" Shank Length, 1-1/2" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	73.59
05 15 16 00-0240	EA	3/4" Diameter Thread, 6" Shank Length, 1-1/2" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	75.05
05 15 16 00-0241	EA	3/4" Diameter Thread, 8" Shank Length, 1-1/2" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	82.99
05 15 16 00-0242	EA	3/4" Diameter Thread, 10" Shank Length, 1-1/2" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	89.54
05 15 16 00-0243	EA	3/4" Diameter Thread, 12" Shank Length, 1-1/2" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	104.70
05 15 16 00-0244	EA	1" Diameter Thread, 8" Shank Length, 2" Inside Eye Diameter, Galvanized Steel, Drop Forged, Eye Bolt	138.71

05 15 19 Stainless Steel Wire Rope Assemblies *(05 15)*

05 15 19 00-0001 7x7, 304 Stainless Steel, Aircraft Cable *(05 15 19)*

05 15 19 00-0002	LF	1/16" Diameter, 7x7, 304 Stainless Steel, Aircraft Cable	0.30	0.08
		For >500, Deduct	*-0.03*	
05 15 19 00-0003	LF	3/32" Diameter, 7x7, 304 Stainless Steel, Aircraft Cable	0.38	0.10
		For >500, Deduct	*-0.05*	
05 15 19 00-0004	LF	1/8" Diameter, 7x7, 304 Stainless Steel, Aircraft Cable	0.49	0.11
		For >500, Deduct	*-0.06*	
05 15 19 00-0005	LF	5/32" Diameter, 7x7, 304 Stainless Steel, Aircraft Cable	0.64	0.12
		For >500, Deduct	*-0.09*	
05 15 19 00-0006	LF	3/16" Diameter, 7x7, 304 Stainless Steel, Aircraft Cable	0.79	0.12
		For >500, Deduct	*-0.11*	

05 15 19 00-0007 7x19, 304 Stainless Steel, Aircraft Cable *(05 15 19)*

05 15 19 00-0008	LF	1/8" Diameter, 7x19, 304 Stainless Steel, Aircraft Cable	0.55	0.11
		For >500, Deduct	*-0.08*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 15 19 00-0009	LF	5/32" Diameter, 7x19, 304 Stainless Steel, Aircraft Cable	0.64	0.12
		For >500, Deduct	*-0.09*	
05 15 19 00-0010	LF	3/16" Diameter, 7x19, 304 Stainless Steel, Aircraft Cable	0.75	0.12
		For >500, Deduct	*-0.11*	
05 15 19 00-0011	LF	1/4" Diameter, 7x19, 304 Stainless Steel, Aircraft Cable	0.94	0.12
		For >500, Deduct	*-0.15*	
05 15 19 00-0012	LF	5/16" Diameter, 7x19, 304 Stainless Steel, Aircraft Cable	1.43	0.12
		For >500, Deduct	*-0.22*	
05 15 19 00-0013	LF	3/8" Diameter, 7x19, 304 Stainless Steel, Aircraft Cable	2.14	0.24
		For >500, Deduct	*-0.34*	
05 15 19 00-0014		7x7, 316 Stainless Steel, Aircraft Cable *(05 15 19)*		
05 15 19 00-0015	LF	1/16" Diameter, 7x7, 316 Stainless Steel, Aircraft Cable	0.30	0.08
		For >500, Deduct	*-0.03*	
05 15 19 00-0016	LF	3/32" Diameter, 7x7, 316 Stainless Steel, Aircraft Cable	0.38	0.10
		For >500, Deduct	*-0.05*	
05 15 19 00-0017	LF	1/8" Diameter, 7x7, 316 Stainless Steel, Aircraft Cable	0.49	0.11
		For >500, Deduct	*-0.06*	
05 15 19 00-0018	LF	5/32" Diameter, 7x7, 316 Stainless Steel, Aircraft Cable	0.64	0.12
		For >500, Deduct	*-0.09*	
05 15 19 00-0019	LF	3/16" Diameter, 7x7, 316 Stainless Steel, Aircraft Cable	0.79	0.12
		For >500, Deduct	*-0.11*	
05 15 19 00-0020		7x19, 316 Stainless Steel, Aircraft Cable *(05 15 19)*		
05 15 19 00-0021	LF	1/8" Diameter, 7x19, 316 Stainless Steel, Aircraft Cable	0.55	0.11
		For >500, Deduct	*-0.08*	
05 15 19 00-0022	LF	5/32" Diameter, 7x19, 316 Stainless Steel, Aircraft Cable	0.64	0.12
		For >500, Deduct	*-0.09*	
05 15 19 00-0023	LF	3/16" Diameter, 7x19, 316 Stainless Steel, Aircraft Cable	0.75	0.12
		For >500, Deduct	*-0.11*	
05 15 19 00-0024	LF	1/4" Diameter, 7x19, 316 Stainless Steel, Aircraft Cable	0.94	0.12
		For >500, Deduct	*-0.15*	
05 15 19 00-0025	LF	5/16" Diameter, 7x19, 316 Stainless Steel, Aircraft Cable	1.43	0.12
		For >500, Deduct	*-0.22*	
05 15 19 00-0026	LF	3/8" Diameter, 7x19, 316 Stainless Steel, Aircraft Cable	2.14	0.12
		For >500, Deduct	*-0.34*	

05 20 Metal Joists *(05)*

Note: Includes all connecting bolts and welds.

05 21 Steel Joist Framing *(05 20)*

05 21 19 Open Web Steel Joist Framing *(05 21)*

05 21 19 00-0001	TON	H, J Or K Open Web Joist, Up To 30' Span, Steel, Horizontal Bridging	2,879.02	212.10
		For Welded Cross Bridging, Add	*265.12*	
		For Shop Prime Paint Other Than Manufacturer's Standard, Add	*239.43*	
05 21 19 00-0002	TON	H, J Or K Open Web Joist, >30' To 50' Span, Steel, Horizontal Bridging	2,638.31	198.84
		For Welded Cross Bridging, Add	*235.67*	
		For Shop Prime Paint Other Than Manufacturer's Standard, Add	*222.33*	
05 21 19 00-0003	TON	LJ Or LH Open Web Joist, Up To 96' Span, Steel, Bolted Cross Bridging	3,163.86	198.84
		For Welded Cross Bridging, Add	*244.73*	
		For Shop Prime Paint Other Than Manufacturer's Standard, Add	*281.77*	
05 21 19 00-0004	TON	DLJ Or DLH Open Web Joist, Up To 144' Span, Steel, Bolted Cross Bridging	3,581.30	198.84
		For Welded Cross Bridging, Add	*244.73*	
		For Shop Prime Paint Other Than Manufacturer's Standard, Add	*331.86*	
05 21 19 00-0005	TON	CS Open Web Joist, Up To 30' Span, Steel, Horizontal Bridging	3,179.66	198.84
		For Welded Cross Bridging, Add	*265.12*	
		For Shop Prime Paint Other Than Manufacturer's Standard, Add	*275.51*	
05 21 19 00-0006	TON	SLH Open Web Joist, Up To 200' Span, Steel, Bolted Cross Bridging	3,946.56	198.84
		For Welded Cross Bridging, Add	*244.73*	
		For Shop Prime Paint Other Than Manufacturer's Standard, Add	*375.70*	

05 30 Metal Decking *(05)*

Note: Includes all connecting bolts and welds.

05 31 Steel Decking *(05 30)*

05 31 13 Steel Floor Decking *(05 31)*

Note: Floor or roof decking

05 31 13 00-0001 Open Ribbed Galvanized Steel Deck *(05 31 13)*

05 31 13 00-0002	SF	1" Deep, 22 Gauge Open Ribbed Galvanized Steel Deck	3.27	0.54
		For Painted, Deduct	*-0.13*	
		For Perforated Or Slotted, Add	*0.13*	
		For Site Installed Insulation Between Ribs, Add	*0.87*	
		For Up To 100, Add	*0.94*	
		For >100 To 500, Add	*0.53*	
		For >500 To 1,500, Add	*0.17*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 31 13 00-0003	SF	1" Deep, 20 Gauge Open Ribbed Galvanized Steel Deck	3.73	0.63
		For Painted, Deduct	*-0.15*	
		For Perforated Or Slotted, Add	*0.15*	
		For Site Installed Insulation Between Ribs, Add	*0.99*	
		For Up To 100, Add	*1.08*	
		For >100 To 500, Add	*0.61*	
		For >500 To 1,500, Add	*0.20*	
05 31 13 00-0004	SF	1" Deep, 18 Gauge Open Ribbed Galvanized Steel Deck	4.68	0.76
		For Painted, Deduct	*-0.19*	
		For Perforated Or Slotted, Add	*0.19*	
		For Site Installed Insulation Between Ribs, Add	*1.24*	
		For Up To 100, Add	*1.33*	
		For >100 To 500, Add	*0.76*	
		For >500 To 1,500, Add	*0.24*	
05 31 13 00-0005	SF	1-1/2" Deep, 22 Gauge Open Ribbed Galvanized Steel Deck	3.59	0.61
		For Painted, Deduct	*-0.14*	
		For Perforated Or Slotted, Add	*0.14*	
		For Site Installed Insulation Between Ribs, Add	*0.96*	
		For Up To 100, Add	*1.04*	
		For >100 To 500, Add	*0.59*	
		For >500 To 1,500, Add	*0.19*	
05 31 13 00-0006	SF	1-1/2" Deep, 20 Gauge Open Ribbed Galvanized Steel Deck	4.13	0.70
		For Painted, Deduct	*-0.16*	
		For Perforated Or Slotted, Add	*0.16*	
		For Site Installed Insulation Between Ribs, Add	*1.10*	
		For Up To 100, Add	*1.20*	
		For >100 To 500, Add	*0.67*	
		For >500 To 1,500, Add	*0.22*	
05 31 13 00-0007	SF	1-1/2" Deep, 18 Gauge Open Ribbed Galvanized Steel Deck	5.19	0.85
		For Painted, Deduct	*-0.21*	
		For Perforated Or Slotted, Add	*0.21*	
		For Site Installed Insulation Between Ribs, Add	*1.38*	
		For Up To 100, Add	*1.48*	
		For >100 To 500, Add	*0.84*	
		For >500 To 1,500, Add	*0.27*	
05 31 13 00-0008	SF	2" Deep, 22 Gauge Open Ribbed Galvanized Steel Deck	4.06	0.64
		For Painted, Deduct	*-0.16*	
		For Perforated Or Slotted, Add	*0.16*	
		For Site Installed Insulation Between Ribs, Add	*1.08*	
		For Up To 100, Add	*1.13*	
		For >100 To 500, Add	*0.65*	
		For >500 To 1,500, Add	*0.20*	
05 31 13 00-0009	SF	2" Deep, 20 Gauge Open Ribbed Galvanized Steel Deck	4.71	0.74
		For Painted, Deduct	*-0.19*	
		For Perforated Or Slotted, Add	*0.19*	
		For Site Installed Insulation Between Ribs, Add	*1.25*	
		For Up To 100, Add	*1.29*	
		For >100 To 500, Add	*0.74*	
		For >500 To 1,500, Add	*0.23*	
05 31 13 00-0010	SF	2" Deep, 18 Gauge Open Ribbed Galvanized Steel Deck	5.80	0.83
		For Painted, Deduct	*-0.24*	
		For Perforated Or Slotted, Add	*0.24*	
		For Site Installed Insulation Between Ribs, Add	*1.53*	
		For Up To 100, Add	*1.52*	
		For >100 To 500, Add	*0.89*	
		For >500 To 1,500, Add	*0.26*	
05 31 13 00-0011	SF	2" Deep, 16 Gauge Open Ribbed Galvanized Steel Deck	7.28	0.90
		For Painted, Deduct	*-0.31*	
		For Perforated Or Slotted, Add	*0.31*	
		For Site Installed Insulation Between Ribs, Add	*1.90*	
		For Up To 100, Add	*1.75*	
		For >100 To 500, Add	*1.07*	
		For >500 To 1,500, Add	*0.28*	
05 31 13 00-0012	SF	3" Deep, 22 Gauge Open Ribbed Galvanized Steel Deck	4.53	0.68
		For Painted, Deduct	*-0.18*	
		For Perforated Or Slotted, Add	*0.18*	
		For Site Installed Insulation Between Ribs, Add	*1.20*	
		For Up To 100, Add	*1.21*	
		For >100 To 500, Add	*0.71*	
		For >500 To 1,500, Add	*0.21*	
05 31 13 00-0013	SF	3" Deep, 20 Gauge Open Ribbed Galvanized Steel Deck	5.29	0.76
		For Painted, Deduct	*-0.22*	
		For Perforated Or Slotted, Add	*0.22*	
		For Site Installed Insulation Between Ribs, Add	*1.39*	
		For Up To 100, Add	*1.39*	
		For >100 To 500, Add	*0.82*	
		For >500 To 1,500, Add	*0.24*	
05 31 13 00-0014	SF	3" Deep, 18 Gauge Open Ribbed Galvanized Steel Deck	6.59	0.95
		For Painted, Deduct	*-0.27*	
		For Perforated Or Slotted, Add	*0.27*	
		For Site Installed Insulation Between Ribs, Add	*1.74*	
		For Up To 100, Add	*1.72*	
		For >100 To 500, Add	*1.01*	
		For >500 To 1,500, Add	*0.30*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 31 13 00-0015	SF	3" Deep, 16 Gauge Open Ribbed Galvanized Steel Deck	8.29	1.15
		For Painted, Deduct	*-0.34*	
		For Perforated Or Slotted, Add	*0.34*	
		For Site Installed Insulation Between Ribs, Add	*2.18*	
		For Up To 100, Add	*2.12*	
		For >100 To 500, Add	*1.26*	
		For >500 To 1,500, Add	*0.36*	
05 31 13 00-0016	SF	4-1/2" Deep, 18 Gauge Open Ribbed Galvanized Steel Deck	11.94	
		For Painted, Deduct	*-0.55*	
		For Perforated Or Slotted, Add	*0.55*	
		For Site Installed Insulation Between Ribs, Add	*3.06*	
		For Up To 100, Add	*2.13*	
		For >100 To 500, Add	*1.51*	
		For >500 To 1,500, Add	*0.26*	
05 31 13 00-0017	SF	4-1/2" Deep, 16 Gauge Open Ribbed Galvanized Steel Deck	15.04	0.95
		For Painted, Deduct	*-0.69*	
		For Perforated Or Slotted, Add	*0.69*	
		For Site Installed Insulation Between Ribs, Add	*3.85*	
		For Up To 100, Add	*2.57*	
		For >100 To 500, Add	*1.86*	
		For >500 To 1,500, Add	*0.30*	
05 31 13 00-0018	SF	6" Deep, 20 Gauge Open Ribbed Galvanized Steel Deck	13.97	0.95
		For Painted, Deduct	*-0.64*	
		For Perforated Or Slotted, Add	*0.64*	
		For Site Installed Insulation Between Ribs, Add	*3.58*	
		For Up To 100, Add	*2.46*	
		For >100 To 500, Add	*1.75*	
		For >500 To 1,500, Add	*0.30*	
05 31 13 00-0019	SF	6" Deep, 18 Gauge Open Ribbed Galvanized Steel Deck	14.66	1.15
		For Painted, Deduct	*-0.66*	
		For Perforated Or Slotted, Add	*0.66*	
		For Site Installed Insulation Between Ribs, Add	*3.77*	
		For Up To 100, Add	*2.75*	
		For >100 To 500, Add	*1.90*	
		For >500 To 1,500, Add	*0.36*	
05 31 13 00-0020	SF	6" Deep, 16 Gauge Open Ribbed Galvanized Steel Deck	18.31	1.39
		For Painted, Deduct	*-0.83*	
		For Perforated Or Slotted, Add	*0.83*	
		For Site Installed Insulation Between Ribs, Add	*4.71*	
		For Up To 100, Add	*3.41*	
		For >100 To 500, Add	*2.36*	
		For >500 To 1,500, Add	*0.44*	
05 31 13 00-0021	SF	7-1/2" Deep, 18 Gauge Open Ribbed Galvanized Steel Deck	16.21	1.26
		For Painted, Deduct	*-0.73*	
		For Perforated Or Slotted, Add	*0.73*	
		For Site Installed Insulation Between Ribs, Add	*4.17*	
		For Up To 100, Add	*3.04*	
		For >100 To 500, Add	*2.10*	
		For >500 To 1,500, Add	*0.40*	
05 31 13 00-0022	SF	7-1/2" Deep, 16 Gauge Open Ribbed Galvanized Steel Deck	20.19	1.53
		For Painted, Deduct	*-0.91*	
		For Perforated Or Slotted, Add	*0.91*	
		For Site Installed Insulation Between Ribs, Add	*5.19*	
		For Up To 100, Add	*3.74*	
		For >100 To 500, Add	*2.59*	
		For >500 To 1,500, Add	*0.48*	

05 31 13 00-0023 Cellular Galvanized Steel Deck *(05 31 13)*

Note: Cellular decking is made of a top ribbed sheet and a flat bottom sheet welded together to create hollow longitudinal cells within the panels.

05 31 13 00-0024	SF	1" Deep, 22/18 Gauge Cellular Galvanized Steel Deck	10.72	0.97
		For Painted, Deduct	*-0.48*	
		For Perforated Or Slotted, Add	*0.48*	
		For Insulated Cells, Add	*2.14*	
		For Site Installed Insulation Between Ribs, Add	*2.77*	
		For Up To 100, Add	*2.16*	
		For >100 To 500, Add	*1.44*	
		For >500 To 1,500, Add	*0.30*	
05 31 13 00-0025	SF	1" Deep, 18/18 Gauge Cellular Galvanized Steel Deck	11.68	1.28
		For Painted, Deduct	*-0.50*	
		For Perforated Or Slotted, Add	*0.50*	
		For Insulated Cells, Add	*2.27*	
		For Site Installed Insulation Between Ribs, Add	*3.04*	
		For Up To 100, Add	*2.62*	
		For >100 To 500, Add	*1.65*	
		For >500 To 1,500, Add	*0.40*	
05 31 13 00-0026	SF	1-1/2" Deep, 22/18 Gauge Cellular Galvanized Steel Deck	13.15	1.02
		For Painted, Deduct	*-0.59*	
		For Perforated Or Slotted, Add	*0.59*	
		For Insulated Cells, Add	*2.67*	
		For Site Installed Insulation Between Ribs, Add	*3.38*	
		For Up To 100, Add	*2.46*	
		For >100 To 500, Add	*1.70*	
		For >500 To 1,500, Add	*0.32*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 31 13 00-0027	SF	1-1/2" Deep, 18/18 Gauge Cellular Galvanized Steel Deck	14.25	1.35
		For Painted, Deduct	*-0.63*	
		For Perforated Or Slotted, Add	*0.63*	
		For Insulated Cells, Add	*2.83*	
		For Site Installed Insulation Between Ribs, Add	*3.69*	
		For Up To 100, Add	*2.95*	
		For >100 To 500, Add	*1.93*	
		For >500 To 1,500, Add	*0.42*	
05 31 13 00-0028	SF	3" Deep, 20/18 Gauge Cellular Galvanized Steel Deck	15.06	1.24
		For Painted, Deduct	*-0.68*	
		For Perforated Or Slotted, Add	*0.68*	
		For Insulated Cells, Add	*3.05*	
		For Site Installed Insulation Between Ribs, Add	*3.88*	
		For Up To 100, Add	*2.87*	
		For >100 To 500, Add	*1.96*	
		For >500 To 1,500, Add	*0.38*	
05 31 13 00-0029	SF	3" Deep, 18/18 Gauge Cellular Galvanized Steel Deck	18.00	1.42
		For Painted, Deduct	*-0.81*	
		For Perforated Or Slotted, Add	*0.81*	
		For Insulated Cells, Add	*3.65*	
		For Site Installed Insulation Between Ribs, Add	*4.63*	
		For Up To 100, Add	*3.40*	
		For >100 To 500, Add	*2.33*	
		For >500 To 1,500, Add	*0.45*	
05 31 13 00-0030	SF	3" Deep, 18/16 Gauge Cellular Galvanized Steel Deck	20.17	1.53
		For Painted, Deduct	*-0.91*	
		For Perforated Or Slotted, Add	*0.91*	
		For Insulated Cells, Add	*4.11*	
		For Site Installed Insulation Between Ribs, Add	*5.19*	
		For Up To 100, Add	*3.74*	
		For >100 To 500, Add	*2.59*	
		For >500 To 1,500, Add	*0.48*	
05 31 13 00-0031	SF	3" Deep, 16/16 Gauge Cellular Galvanized Steel Deck	21.81	1.65
		For Painted, Deduct	*-0.99*	
		For Perforated Or Slotted, Add	*0.99*	
		For Insulated Cells, Add	*4.45*	
		For Site Installed Insulation Between Ribs, Add	*5.61*	
		For Up To 100, Add	*4.03*	
		For >100 To 500, Add	*2.80*	
		For >500 To 1,500, Add	*0.51*	
05 31 13 00-0032	SF	4-1/2" Deep, 20/18 Gauge Cellular Galvanized Steel Deck	23.30	1.24
		For Painted, Deduct	*-1.09*	
		For Perforated Or Slotted, Add	*1.09*	
		For Insulated Cells, Add	*4.90*	
		For Site Installed Insulation Between Ribs, Add	*5.94*	
		For Up To 100, Add	*3.72*	
		For >100 To 500, Add	*2.79*	
		For >500 To 1,500, Add	*0.39*	
05 31 13 00-0033	SF	4-1/2" Deep, 18/18 Gauge Cellular Galvanized Steel Deck	24.80	1.44
		For Painted, Deduct	*-1.15*	
		For Perforated Or Slotted, Add	*1.15*	
		For Insulated Cells, Add	*5.18*	
		For Site Installed Insulation Between Ribs, Add	*6.33*	
		For Up To 100, Add	*4.10*	
		For >100 To 500, Add	*3.02*	
		For >500 To 1,500, Add	*0.45*	
05 31 13 00-0034	SF	4-1/2" Deep, 18/16 Gauge Cellular Galvanized Steel Deck	26.21	1.55
		For Painted, Deduct	*-1.21*	
		For Perforated Or Slotted, Add	*1.21*	
		For Insulated Cells, Add	*5.46*	
		For Site Installed Insulation Between Ribs, Add	*6.70*	
		For Up To 100, Add	*4.37*	
		For >100 To 500, Add	*3.20*	
		For >500 To 1,500, Add	*0.49*	
05 31 13 00-0035	SF	4-1/2" Deep, 16/16 Gauge Cellular Galvanized Steel Deck	27.95	1.67
		For Painted, Deduct	*-1.29*	
		For Perforated Or Slotted, Add	*1.29*	
		For Insulated Cells, Add	*5.82*	
		For Site Installed Insulation Between Ribs, Add	*7.14*	
		For Up To 100, Add	*4.67*	
		For >100 To 500, Add	*3.42*	
		For >500 To 1,500, Add	*0.52*	

05 31 23 Steel Roof Decking *(05 31)*

See CSI section 05 31 13 00-0000 for Steel floor or roof decking.

05 31 33 Steel Form Decking *(05 31)*

05 31 33 00-0001 Open Ribbed Galvanized Steel Form Deck *(05 31 33)*

05 31 33 00-0002	SF	9/16" Deep, 28 Gauge Open Ribbed Galvanized Steel Form Deck	2.99	
		For Painted, Deduct	*-0.10*	
		For Perforated Or Slotted, Add	*0.10*	
		For Up To 100, Add	*1.22*	
		For >100 To 500, Add	*0.61*	
		For >500 To 1,500, Add	*0.26*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 31 33 00-0003	SF	9/16" Deep, 26 Gauge Open Ribbed Galvanized Steel Form Deck	3.16	
		For Painted, Deduct	*-0.10*	
		For Perforated Or Slotted, Add	*0.10*	
		For Up To 100, Add	*1.28*	
		For >100 To 500, Add	*0.64*	
		For >500 To 1,500, Add	*0.27*	
05 31 33 00-0004	SF	9/16" Deep, 24 Gauge Open Ribbed Galvanized Steel Form Deck	3.51	
		For Painted, Deduct	*-0.11*	
		For Perforated Or Slotted, Add	*0.11*	
		For Up To 100, Add	*1.47*	
		For >100 To 500, Add	*0.72*	
		For >500 To 1,500, Add	*0.31*	
05 31 33 00-0005	SF	9/16" Deep, 22 Gauge Open Ribbed Galvanized Steel Form Deck	3.80	
		For Painted, Deduct	*-0.12*	
		For Perforated Or Slotted, Add	*0.12*	
		For Up To 100, Add	*1.65*	
		For >100 To 500, Add	*0.80*	
		For >500 To 1,500, Add	*0.35*	
05 31 33 00-0006	SF	15/16" Deep, 26 Gauge Open Ribbed Galvanized Steel Form Deck	3.57	
		For Painted, Deduct	*-0.13*	
		For Perforated Or Slotted, Add	*0.13*	
		For Up To 100, Add	*1.32*	
		For >100 To 500, Add	*0.68*	
		For >500 To 1,500, Add	*0.27*	
05 31 33 00-0007	SF	15/16" Deep, 25 Gauge Open Ribbed Galvanized Steel Form Deck	3.76	
		For Painted, Deduct	*-0.13*	
		For Perforated Or Slotted, Add	*0.13*	
		For Up To 100, Add	*1.39*	
		For >100 To 500, Add	*0.72*	
		For >500 To 1,500, Add	*0.28*	
05 31 33 00-0008	SF	15/16" Deep, 24 Gauge Open Ribbed Galvanized Steel Form Deck	3.96	
		For Painted, Deduct	*-0.14*	
		For Perforated Or Slotted, Add	*0.14*	
		For Up To 100, Add	*1.51*	
		For >100 To 500, Add	*0.77*	
		For >500 To 1,500, Add	*0.31*	
05 31 33 00-0009	SF	15/16" Deep, 22 Gauge Open Ribbed Galvanized Steel Form Deck	4.23	
		For Painted, Deduct	*-0.14*	
		For Perforated Or Slotted, Add	*0.14*	
		For Up To 100, Add	*1.69*	
		For >100 To 500, Add	*0.85*	
		For >500 To 1,500, Add	*0.35*	
05 31 33 00-0010	SF	1-15/16" Deep, 26 Gauge Open Ribbed Galvanized Steel Form Deck	4.45	
		For Painted, Deduct	*-0.15*	
		For Perforated Or Slotted, Add	*0.15*	
		For Up To 100, Add	*1.76*	
		For >100 To 500, Add	*0.88*	
		For >500 To 1,500, Add	*0.37*	
05 31 33 00-0011	SF	1-15/16" Deep, 24 Gauge Open Ribbed Galvanized Steel Form Deck	4.86	
		For Painted, Deduct	*-0.17*	
		For Perforated Or Slotted, Add	*0.17*	
		For Up To 100, Add	*1.85*	
		For >100 To 500, Add	*0.94*	
		For >500 To 1,500, Add	*0.38*	
05 31 33 00-0012	SF	1-15/16" Deep, 22 Gauge Open Ribbed Galvanized Steel Form Deck	5.57	
		For Painted, Deduct	*-0.20*	
		For Perforated Or Slotted, Add	*0.20*	
		For Up To 100, Add	*2.03*	
		For >100 To 500, Add	*1.05*	
		For >500 To 1,500, Add	*0.41*	
05 31 33 00-0013	SF	1-15/16" Deep, 20 Gauge Open Ribbed Galvanized Steel Form Deck	6.17	
		For Painted, Deduct	*-0.22*	
		For Perforated Or Slotted, Add	*0.22*	
		For Up To 100, Add	*2.29*	
		For >100 To 500, Add	*1.18*	
		For >500 To 1,500, Add	*0.47*	

05 36 Composite Metal Decking *(05 30)*

05 36 00 00-0001 Composite Open Ribbed Galvanized Steel Deck *(05 36)*

Note: Composite decking has rolled-in embossments or ridges designed to interlock with the concrete slab.

05 36 00 00-0002	SF	1-1/2" Deep, 22 Gauge Composite Open Ribbed Galvanized Steel Deck	4.50	
		For Painted, Deduct	*-0.15*	
		For Perforated Or Slotted, Add	*0.15*	
		For Up To 100, Add	*1.76*	
		For >100 To 500, Add	*0.89*	
		For >500 To 1,500, Add	*0.37*	
05 36 00 00-0003	SF	1-1/2" Deep, 20 Gauge Composite Open Ribbed Galvanized Steel Deck	4.82	
		For Painted, Deduct	*-0.16*	
		For Perforated Or Slotted, Add	*0.16*	
		For Up To 100, Add	*1.96*	
		For >100 To 500, Add	*0.97*	
		For >500 To 1,500, Add	*0.41*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 36 00 00-0004	SF	1-1/2" Deep, 18 Gauge Composite Open Ribbed Galvanized Steel Deck	5.40	
		For Painted, Deduct	*-0.17*	
		For Perforated Or Slotted, Add	*0.17*	
		For Up To 100, Add	*2.37*	
		For >100 To 500, Add	*1.15*	
		For >500 To 1,500, Add	*0.51*	
05 36 00 00-0005	SF	1-1/2" Deep, 16 Gauge Composite Open Ribbed Galvanized Steel Deck	5.89	
		For Painted, Deduct	*-0.17*	
		For Perforated Or Slotted, Add	*0.17*	
		For Up To 100, Add	*2.77*	
		For >100 To 500, Add	*1.32*	
		For >500 To 1,500, Add	*0.61*	
05 36 00 00-0006	SF	2" Deep, 22 Gauge Composite Open Ribbed Galvanized Steel Deck	4.82	
		For Painted, Deduct	*-0.16*	
		For Perforated Or Slotted, Add	*0.16*	
		For Up To 100, Add	*1.96*	
		For >100 To 500, Add	*0.97*	
		For >500 To 1,500, Add	*0.41*	
05 36 00 00-0007	SF	2" Deep, 20 Gauge Composite Open Ribbed Galvanized Steel Deck	5.20	
		For Painted, Deduct	*-0.17*	
		For Perforated Or Slotted, Add	*0.17*	
		For Up To 100, Add	*2.14*	
		For >100 To 500, Add	*1.06*	
		For >500 To 1,500, Add	*0.45*	
05 36 00 00-0008	SF	2" Deep, 18 Gauge Composite Open Ribbed Galvanized Steel Deck	5.78	
		For Painted, Deduct	*-0.18*	
		For Perforated Or Slotted, Add	*0.18*	
		For Up To 100, Add	*2.56*	
		For >100 To 500, Add	*1.24*	
		For >500 To 1,500, Add	*0.55*	
05 36 00 00-0009	SF	2" Deep, 16 Gauge Composite Open Ribbed Galvanized Steel Deck	6.32	
		For Painted, Deduct	*-0.19*	
		For Perforated Or Slotted, Add	*0.19*	
		For Up To 100, Add	*2.96*	
		For >100 To 500, Add	*1.41*	
		For >500 To 1,500, Add	*0.65*	
05 36 00 00-0010	SF	3" Deep, 22 Gauge Composite Open Ribbed Galvanized Steel Deck	5.06	
		For Painted, Deduct	*-0.17*	
		For Perforated Or Slotted, Add	*0.17*	
		For Up To 100, Add	*2.03*	
		For >100 To 500, Add	*1.01*	
		For >500 To 1,500, Add	*0.42*	
05 36 00 00-0011	SF	3" Deep, 20 Gauge Composite Open Ribbed Galvanized Steel Deck	5.42	
		For Painted, Deduct	*-0.18*	
		For Perforated Or Slotted, Add	*0.18*	
		For Up To 100, Add	*2.26*	
		For >100 To 500, Add	*1.12*	
		For >500 To 1,500, Add	*0.48*	
05 36 00 00-0012	SF	3" Deep, 18 Gauge Composite Open Ribbed Galvanized Steel Deck	6.10	
		For Painted, Deduct	*-0.19*	
		For Perforated Or Slotted, Add	*0.19*	
		For Up To 100, Add	*2.74*	
		For >100 To 500, Add	*1.32*	
		For >500 To 1,500, Add	*0.59*	
05 36 00 00-0013	SF	3" Deep, 16 Gauge Composite Open Ribbed Galvanized Steel Deck	6.80	
		For Painted, Deduct	*-0.20*	
		For Perforated Or Slotted, Add	*0.20*	
		For Up To 100, Add	*3.21*	
		For >100 To 500, Add	*1.52*	
		For >500 To 1,500, Add	*0.70*	

05 36 00 00-0014 Composite Cellular Galvanized Steel Deck *(05 36)*

Note: Composite decking has rolled-in embossments or ridges designed to interlock with the concrete slab. Cellular decking is made of a top ribbed sheet and a bottom flat sheet welded together to create hollow longitudinal cells within the panels.

05 36 00 00-0015	SF	1-1/2" Deep, 20/20 Gauge Composite Cellular Galvanized Steel Deck	8.25	
		For Painted, Deduct	*-0.28*	
		For Perforated Or Slotted, Add	*0.28*	
		For Insulated Cells, Add	*1.26*	
		For Up To 100, Add	*3.21*	
		For >100 To 500, Add	*1.62*	
		For >500 To 1,500, Add	*0.66*	
05 36 00 00-0016	SF	1-1/2" Deep, 20/18 Gauge Composite Cellular Galvanized Steel Deck	8.82	
		For Painted, Deduct	*-0.29*	
		For Perforated Or Slotted, Add	*0.29*	
		For Insulated Cells, Add	*1.33*	
		For Up To 100, Add	*3.52*	
		For >100 To 500, Add	*1.76*	
		For >500 To 1,500, Add	*0.73*	
05 36 00 00-0017	SF	1-1/2" Deep, 18/20 Gauge Composite Cellular Galvanized Steel Deck	8.93	
		For Painted, Deduct	*-0.29*	
		For Perforated Or Slotted, Add	*0.29*	
		For Insulated Cells, Add	*1.33*	
		For Up To 100, Add	*3.63*	
		For >100 To 500, Add	*1.81*	
		For >500 To 1,500, Add	*0.76*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 36 00 00-0018	SF	1-1/2" Deep, 18/18 Gauge Composite Cellular Galvanized Steel Deck	9.49	
		For Painted, Deduct	*-0.31*	
		For Perforated Or Slotted, Add	*0.31*	
		For Insulated Cells, Add	*1.37*	
		For Up To 100, Add	*3.99*	
		For >100 To 500, Add	*1.96*	
		For >500 To 1,500, Add	*0.85*	
05 36 00 00-0019	SF	1-1/2" Deep, 18/16 Gauge Composite Cellular Galvanized Steel Deck	10.17	
		For Painted, Deduct	*-0.33*	
		For Perforated Or Slotted, Add	*0.33*	
		For Insulated Cells, Add	*1.46*	
		For Up To 100, Add	*4.31*	
		For >100 To 500, Add	*2.12*	
		For >500 To 1,500, Add	*0.92*	
05 36 00 00-0020	SF	1-1/2" Deep, 16/18 Gauge Composite Cellular Galvanized Steel Deck	10.28	
		For Painted, Deduct	*-0.33*	
		For Perforated Or Slotted, Add	*0.33*	
		For Insulated Cells, Add	*1.46*	
		For Up To 100, Add	*4.42*	
		For >100 To 500, Add	*2.16*	
		For >500 To 1,500, Add	*0.94*	
05 36 00 00-0021	SF	1-1/2" Deep, 16/16 Gauge Composite Cellular Galvanized Steel Deck	10.85	
		For Painted, Deduct	*-0.34*	
		For Perforated Or Slotted, Add	*0.34*	
		For Insulated Cells, Add	*1.51*	
		For Up To 100, Add	*4.79*	
		For >100 To 500, Add	*2.32*	
		For >500 To 1,500, Add	*1.03*	
05 36 00 00-0022	SF	2" Deep, 20/20 Gauge Composite Cellular Galvanized Steel Deck	8.52	
		For Painted, Deduct	*-0.29*	
		For Perforated Or Slotted, Add	*0.29*	
		For Insulated Cells, Add	*1.28*	
		For Up To 100, Add	*3.38*	
		For >100 To 500, Add	*1.70*	
		For >500 To 1,500, Add	*0.70*	
05 36 00 00-0023	SF	2" Deep, 20/18 Gauge Composite Cellular Galvanized Steel Deck	9.00	
		For Painted, Deduct	*-0.30*	
		For Perforated Or Slotted, Add	*0.30*	
		For Insulated Cells, Add	*1.34*	
		For Up To 100, Add	*3.64*	
		For >100 To 500, Add	*1.81*	
		For >500 To 1,500, Add	*0.76*	
05 36 00 00-0024	SF	2" Deep, 18/20 Gauge Composite Cellular Galvanized Steel Deck	9.11	
		For Painted, Deduct	*-0.30*	
		For Perforated Or Slotted, Add	*0.30*	
		For Insulated Cells, Add	*1.34*	
		For Up To 100, Add	*3.75*	
		For >100 To 500, Add	*1.86*	
		For >500 To 1,500, Add	*0.79*	
05 36 00 00-0025	SF	2" Deep, 18/18 Gauge Composite Cellular Galvanized Steel Deck	9.79	
		For Painted, Deduct	*-0.31*	
		For Perforated Or Slotted, Add	*0.31*	
		For Insulated Cells, Add	*1.42*	
		For Up To 100, Add	*4.13*	
		For >100 To 500, Add	*2.03*	
		For >500 To 1,500, Add	*0.88*	
05 36 00 00-0026	SF	2" Deep, 18/16 Gauge Composite Cellular Galvanized Steel Deck	10.35	
		For Painted, Deduct	*-0.33*	
		For Perforated Or Slotted, Add	*0.33*	
		For Insulated Cells, Add	*1.48*	
		For Up To 100, Add	*4.43*	
		For >100 To 500, Add	*2.17*	
		For >500 To 1,500, Add	*0.94*	
05 36 00 00-0027	SF	2" Deep, 16/18 Gauge Composite Cellular Galvanized Steel Deck	10.52	
		For Painted, Deduct	*-0.33*	
		For Perforated Or Slotted, Add	*0.33*	
		For Insulated Cells, Add	*1.48*	
		For Up To 100, Add	*4.60*	
		For >100 To 500, Add	*2.23*	
		For >500 To 1,500, Add	*0.99*	
05 36 00 00-0028	SF	2" Deep, 16/16 Gauge Composite Cellular Galvanized Steel Deck	11.11	
		For Painted, Deduct	*-0.34*	
		For Perforated Or Slotted, Add	*0.34*	
		For Insulated Cells, Add	*1.55*	
		For Up To 100, Add	*4.92*	
		For >100 To 500, Add	*2.38*	
		For >500 To 1,500, Add	*1.06*	
05 36 00 00-0029	SF	3" Deep, 20/20 Gauge Composite Cellular Galvanized Steel Deck	8.55	
		For Painted, Deduct	*-0.29*	
		For Perforated Or Slotted, Add	*0.29*	
		For Insulated Cells, Add	*1.29*	
		For Up To 100, Add	*3.38*	
		For >100 To 500, Add	*1.70*	
		For >500 To 1,500, Add	*0.70*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 36 00 00-0030	SF	3" Deep, 20/18 Gauge Composite Cellular Galvanized Steel Deck	9.06	
		For Painted, Deduct	*-0.30*	
		For Perforated Or Slotted, Add	*0.30*	
		For Insulated Cells, Add	*1.34*	
		For Up To 100, Add	*3.70*	
		For >100 To 500, Add	*1.84*	
		For >500 To 1,500, Add	*0.78*	
05 36 00 00-0031	SF	3" Deep, 18/20 Gauge Composite Cellular Galvanized Steel Deck	9.23	
		For Painted, Deduct	*-0.30*	
		For Perforated Or Slotted, Add	*0.30*	
		For Insulated Cells, Add	*1.34*	
		For Up To 100, Add	*3.87*	
		For >100 To 500, Add	*1.90*	
		For >500 To 1,500, Add	*0.82*	
05 36 00 00-0032	SF	3" Deep, 18/18 Gauge Composite Cellular Galvanized Steel Deck	9.88	
		For Painted, Deduct	*-0.32*	
		For Perforated Or Slotted, Add	*0.32*	
		For Insulated Cells, Add	*1.42*	
		For Up To 100, Add	*4.18*	
		For >100 To 500, Add	*2.05*	
		For >500 To 1,500, Add	*0.89*	
05 36 00 00-0033	SF	3" Deep, 18/16 Gauge Composite Cellular Galvanized Steel Deck	10.52	
		For Painted, Deduct	*-0.33*	
		For Perforated Or Slotted, Add	*0.33*	
		For Insulated Cells, Add	*1.51*	
		For Up To 100, Add	*4.50*	
		For >100 To 500, Add	*2.20*	
		For >500 To 1,500, Add	*0.96*	
05 36 00 00-0034	SF	3" Deep, 16/18 Gauge Composite Cellular Galvanized Steel Deck	10.74	
		For Painted, Deduct	*-0.33*	
		For Perforated Or Slotted, Add	*0.33*	
		For Insulated Cells, Add	*1.51*	
		For Up To 100, Add	*4.72*	
		For >100 To 500, Add	*2.29*	
		For >500 To 1,500, Add	*1.01*	
05 36 00 00-0035	SF	3" Deep, 16/16 Gauge Composite Cellular Galvanized Steel Deck	11.22	
		For Painted, Deduct	*-0.34*	
		For Perforated Or Slotted, Add	*0.34*	
		For Insulated Cells, Add	*1.55*	
		For Up To 100, Add	*5.03*	
		For >100 To 500, Add	*2.42*	
		For >500 To 1,500, Add	*1.09*	

05 36 00 00-0036 Non-Cellular, Composite Deck, Galvanized *(05 36)*

05 36 00 00-0037	SF	1" Deep x 16 Gauge Composite Metal Deck Galvanized, Non-Cellular	6.29	
05 36 00 00-0038	SF	1" Deep x 18 Gauge Composite Metal Deck Galvanized, Non-Cellular	5.18	
05 36 00 00-0039	SF	1" Deep x 20 Gauge Composite Metal Deck Galvanized, Non-Cellular	4.30	
05 36 00 00-0040	SF	1" Deep x 22 Gauge Composite Metal Deck Galvanized, Non-Cellular	3.71	
05 36 00 00-0041	SF	1-1/2" Deep x 16 Gauge Composite Metal Deck Galvanized, Non-Cellular	6.92	
05 36 00 00-0042	SF	1-1/2" Deep x 18 Gauge Composite Metal Deck Galvanized, Non-Cellular	5.64	
05 36 00 00-0043	SF	1-1/2" Deep x 20 Gauge Composite Metal Deck Galvanized, Non-Cellular	4.68	
05 36 00 00-0044	SF	1-1/2" Deep x 22 Gauge Composite Metal Deck Galvanized, Non-Cellular	4.05	
05 36 00 00-0045	SF	3" Deep x 16 Gauge Composite Metal Deck Galvanized, Non-Cellular	7.99	
05 36 00 00-0046	SF	3" Deep x 18 Gauge Composite Metal Deck Galvanized, Non-Cellular	6.40	
05 36 00 00-0047	SF	3" Deep x 20 Gauge Composite Metal Deck Galvanized, Non-Cellular	5.38	
05 36 00 00-0048	SF	3" Deep x 22 Gauge Composite Metal Deck Galvanized, Non-Cellular	4.86	

05 40 Cold-Formed Metal Framing *(05)*

Note: Includes all connecting bolts and welds.

05 41 Structural Metal Stud Framing *(05 40)*

Note: Includes studs, bridging, fasteners, and metal stiffener at half height. Do not deduct for openings of less than 25 SF.

05 41 00 00-0001 18 Gauge, Load Bearing, Structural Metal Stud Framing With Tracks And Runners Assemblies *(05 41)*

05 41 00 00-0002	SF	2-1/2" Width, 16" On Center, 18 Gauge, Load Bearing, Structural Metal Stud Framing With Tracks And Runners Assembly	7.27	1.22
		For Walls >10' High, Add	*1.45*	
		For Curved Wall, Add	*0.85*	
		For Up To 200, Add	*2.02*	
		For >200 To 500, Add	*1.01*	
		For 12" On Center, Add	*1.31*	
		For 24" On Center, Deduct	*-1.31*	
05 41 00 00-0003	SF	3-5/8" Width, 16" On Center, 18 Gauge, Load Bearing, Structural Metal Stud Framing With Tracks And Runners Assembly	8.19	1.22
		For Walls >10' High, Add	*1.64*	
		For Curved Wall, Add	*0.89*	
		For Up To 200, Add	*2.23*	
		For >200 To 500, Add	*1.12*	
		For 12" On Center, Add	*1.49*	
		For 24" On Center, Deduct	*-1.49*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 41 00 00-0004	SF	4" Width, 16" On Center, 18 Gauge, Load Bearing, Structural Metal Stud Framing With Tracks And Runners Assembly	8.54	1.22
		For Walls >10' High, Add	*1.71*	
		For Curved Wall, Add	*0.93*	
		For Up To 200, Add	*2.33*	
		For >200 To 500, Add	*1.16*	
		For 12" On Center, Add	*1.55*	
		For 24" On Center, Deduct	*-1.55*	
05 41 00 00-0005	SF	6" Width, 16" On Center, 18 Gauge, Load Bearing, Structural Metal Stud Framing With Tracks And Runners Assembly	11.10	1.35
		For Walls >10' High, Add	*2.22*	
		For Curved Wall, Add	*0.97*	
		For Up To 200, Add	*2.86*	
		For >200 To 500, Add	*1.43*	
		For 12" On Center, Add	*2.06*	
		For 24" On Center, Deduct	*-2.06*	
05 41 00 00-0006	SF	8" Width, 16" On Center, 18 Gauge, Load Bearing, Structural Metal Stud Framing With Tracks And Runners Assembly	12.49	1.48
		For Walls >10' High, Add	*2.50*	
		For Curved Wall, Add	*1.01*	
		For Up To 200, Add	*3.17*	
		For >200 To 500, Add	*1.59*	
		For 12" On Center, Add	*2.33*	
		For 24" On Center, Deduct	*-2.33*	

05 41 00 00-0007 16 Gauge, Load Bearing, Structural Metal Stud Framing With Tracks And Runners Assemblies *(05 41)*

05 41 00 00-0008	SF	2-1/2" Width, 16" On Center, 16 Gauge, Load Bearing, Structural Metal Stud Framing With Tracks And Runners Assembly	7.84	1.22
		For Walls >10' High, Add	*1.57*	
		For Curved Wall, Add	*0.89*	
		For Up To 200, Add	*2.16*	
		For >200 To 500, Add	*1.08*	
		For 12" On Center, Add	*1.42*	
		For 24" On Center, Deduct	*-1.42*	
05 41 00 00-0009	SF	3-5/8" Width, 16" On Center, 16 Gauge, Load Bearing, Structural Metal Stud Framing With Tracks And Runners Assembly	9.18	1.23
		For Walls >10' High, Add	*1.84*	
		For Curved Wall, Add	*0.94*	
		For Up To 200, Add	*2.46*	
		For >200 To 500, Add	*1.23*	
		For 12" On Center, Add	*1.68*	
		For 24" On Center, Deduct	*-1.68*	
05 41 00 00-0010	SF	4" Width, 16" On Center, 16 Gauge, Load Bearing, Structural Metal Stud Framing With Tracks And Runners Assembly	9.70	1.23
		For Walls >10' High, Add	*1.94*	
		For Curved Wall, Add	*0.97*	
		For Up To 200, Add	*2.59*	
		For >200 To 500, Add	*1.29*	
		For 12" On Center, Add	*1.78*	
		For 24" On Center, Deduct	*-1.78*	
05 41 00 00-0011	SF	6" Width, 16" On Center, 16 Gauge, Load Bearing, Structural Metal Stud Framing With Tracks And Runners Assembly	12.50	1.48
		For Walls >10' High, Add	*2.50*	
		For Curved Wall, Add	*1.02*	
		For Up To 200, Add	*3.18*	
		For >200 To 500, Add	*1.59*	
		For 12" On Center, Add	*2.33*	
		For 24" On Center, Deduct	*-2.33*	
05 41 00 00-0012	SF	8" Width, 16" On Center, 16 Gauge, Load Bearing, Structural Metal Stud Framing With Tracks And Runners Assembly	13.85	1.62
		For Walls >10' High, Add	*2.77*	
		For Curved Wall, Add	*1.07*	
		For Up To 200, Add	*3.48*	
		For >200 To 500, Add	*1.74*	
		For 12" On Center, Add	*2.59*	
		For 24" On Center, Deduct	*-2.59*	

05 41 00 00-0013 14 Gauge, Load Bearing, Structural Metal Stud Framing With Tracks And Runners Assemblies *(05 41)*

05 41 00 00-0014	SF	3-5/8" Width, 16" On Center, 14 Gauge, Load Bearing, Structural Metal Stud Framing With Tracks And Runners Assembly	10.90	1.68
		For Walls >10' High, Add	*2.18*	
		For Curved Wall, Add	*1.12*	
		For Up To 200, Add	*2.93*	
		For >200 To 500, Add	*1.46*	
		For 12" On Center, Add	*1.99*	
		For 24" On Center, Deduct	*-1.99*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 41 00 00-0015	SF	4" Width, 16" On Center, 14 Gauge, Load Bearing, Structural Metal Stud Framing With Tracks And Runners Assembly	11.22	1.71
		For Walls >10' High, Add	*2.24*	
		For Curved Wall, Add	*1.14*	
		For Up To 200, Add	*3.01*	
		For >200 To 500, Add	*1.50*	
		For 12" On Center, Add	*2.05*	
		For 24" On Center, Deduct	*-2.05*	
05 41 00 00-0016	SF	6" Width, 16" On Center, 14 Gauge, Load Bearing, Structural Metal Stud Framing With Tracks And Runners Assembly	14.34	1.80
		For Walls >10' High, Add	*2.87*	
		For Curved Wall, Add	*1.20*	
		For Up To 200, Add	*3.67*	
		For >200 To 500, Add	*1.83*	
		For 12" On Center, Add	*2.67*	
		For 24" On Center, Deduct	*-2.67*	
05 41 00 00-0017	SF	8" Width, 16" On Center, 14 Gauge, Load Bearing, Structural Metal Stud Framing With Tracks And Runners Assembly	15.81	1.88
		For Walls >10' High, Add	*3.16*	
		For Curved Wall, Add	*1.25*	
		For Up To 200, Add	*4.00*	
		For >200 To 500, Add	*2.00*	
		For 12" On Center, Add	*2.95*	
		For 24" On Center, Deduct	*-2.95*	

05 42 Cold-Formed Metal Joist Framing *(05 40)*

05 42 13 Cold-Formed Metal Floor Joist Framing *(05 42)*

Note: Floor or roof joist framing

05 42 13 00-0001 Steel Joists, 20 Gauge *(05 42 13)*

05 42 13 00-0002	LF	5-1/2" - 20 Gauge Steel Joists	15.88	2.89
05 42 13 00-0003	LF	6" - 20 Gauge Steel Joists	17.11	3.64
05 42 13 00-0004	LF	7-1/4" - 20 Gauge Steel Joists	18.52	3.98
05 42 13 00-0005	LF	8" - 20 Gauge Steel Joists	20.91	4.24

05 42 13 00-0006 Steel Joists, 18 Gauge *(05 42 13)*

05 42 13 00-0007	LF	5-1/2" - 18 Gauge Steel Joists	17.72	3.21
05 42 13 00-0008	LF	6" - 18 Gauge Steel Joists	19.11	4.04
05 42 13 00-0009	LF	7-1/4" - 18 Gauge Steel Joists	20.76	4.43
05 42 13 00-0010	LF	8" - 18 Gauge Steel Joists	21.31	4.71

05 42 13 00-0011 Steel Joists, 16 Gauge *(05 42 13)*

05 42 13 00-0012	LF	7-1/4" - 16 Gauge Steel Joists	22.63	4.47
05 42 13 00-0013	LF	8" - 16 Gauge Steel Joists	23.91	4.71

05 42 13 00-0014 Steel Joists, 14 Gauge *(05 42 13)*

05 42 13 00-0015	LF	9-1/4" - 14 Gauge Steel Joists	27.28	4.71
05 42 13 00-0016	LF	11-1/2" - 14 Gauge Steel Joists	29.72	4.96

05 42 13 00-0017 Steel Joists, 12 Gauge *(05 42 13)*

05 42 13 00-0018	LF	9-1/4" - 12 Gauge Steel Joists	32.71	5.18
05 42 13 00-0019	LF	11-1/2" - 12 Gauge Steel Joists	35.88	5.46

05 42 13 00-0020 Steel Joists, 10 Gauge *(05 42 13)*

05 42 13 00-0021	LF	9-1/4" - 10 Gauge Steel Joists	38.21	5.70
05 42 13 00-0022	LF	11-1/2" - 10 Gauge Steel Joists	42.12	6.00

05 42 13 00-0023 Steel Joists, 8 Gauge *(05 42 13)*

05 42 13 00-0024	LF	9-1/4" - 8 Gauge Steel Joists	43.79	6.27
05 42 13 00-0025	LF	11-1/2" - 8 Gauge Steel Joists	48.41	6.61

05 42 23 Cold-Formed Metal Roof Joist Framing *(05 42)*

See CSI section 05 42 13 00-0000 for metal joist framing.

05 43 Slotted Channel Framing *(05 40)*

05 43 00 00-0001 Metal Framing Channel *(05 43)*

Note: Excludes fasteners and accessories. See CSI section 26 05 29 00-0001 for Unistrut framing channels with Electrical Crews.

05 43 00 00-0002 Steel Unistrut Channel *(05 43 00 00-0001)*

05 43 00 00-0003	LF	1-5/8" Wide x 1-5/8" High, 12 Gauge, Steel Unistrut Channel	14.59	2.70
		For Galvanizing, Add	*1.56*	
		For Powder Coating, Add	*1.38*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 43 00 00-0004	LF	1-5/8" Wide x 1-3/8" High, 12 Gauge, Steel Unistrut Channel	15.04	2.70
		For Galvanizing, Add	*1.64*	
		For Powder Coating, Add	*1.44*	
05 43 00 00-0005	LF	1-5/8" Wide x 13/16" High, 12 Gauge, Steel Unistrut Channel	15.72	2.70
		For Galvanizing, Add	*1.75*	
		For Powder Coating, Add	*1.55*	
05 43 00 00-0006	LF	1-5/8" Wide x 1-5/8" High, 14 Gauge, Steel Unistrut Channel	13.70	2.70
		For Galvanizing, Add	*1.41*	
		For Powder Coating, Add	*1.24*	
05 43 00 00-0007	LF	1-5/8" Wide x 13/16" High, 14 Gauge, Steel Unistrut Channel	11.75	2.70
		For Galvanizing, Add	*1.08*	
		For Powder Coating, Add	*0.95*	

05 43 00 00-0008 Stainless Steel Unistrut Channel *(05 43 00 00-0001)*

05 43 00 00-0009 304 Stainless Steel Unistrut Channel *(05 43 00 00-0008)*

05 43 00 00-0010	LF	1-5/8" Wide x 13/16" High, 14 Gauge, 304 Stainless Steel Unistrut Channel	25.53	2.70
05 43 00 00-0011	LF	1-5/8" Wide x 13/16" High, 12 Gauge, 304 Stainless Steel Unistrut Channel	30.44	2.70
05 43 00 00-0012	LF	1-5/8" Wide x 1-5/8" High, 14 Gauge, 304 Stainless Steel Unistrut Channel	29.22	2.70
05 43 00 00-0013	LF	1-5/8" Wide x 1-5/8" High, 12 Gauge, 304 Stainless Steel Unistrut Channel	36.81	2.70

05 43 00 00-0014 316 Stainless Steel Unistrut Channel *(05 43 00 00-0008)*

05 43 00 00-0015	LF	1-5/8" Wide x 13/16" High, 14 Gauge, 316 Stainless Steel Unistrut Channel	41.47	2.70

05 43 00 00-0016 Aluminum Unistrut Channel *(05 43 00 00-0001)*

05 43 00 00-0017	LF	1-5/8" Wide x 1-5/8" High, 12 Gauge, Aluminum Unistrut Channel	14.01	2.70
05 43 00 00-0018	LF	1-5/8" Wide x 13/16" High, 14 Gauge, Aluminum Unistrut Channel	10.61	2.70

05 43 00 00-0019 Metal Framing Channel Fittings *(05 43)*

05 43 00 00-0020 Unistrut Closure Strips *(05 43 00 00-0019)*

05 43 00 00-0021	LF	Steel Raceway Closure Strip For Unistrut Channel	9.09	0.59

05 43 00 00-0022 Lock Nuts With Spring For Unistrut Channel *(05 43 00 00-0019)*

Note: Includes hex bolt.

05 43 00 00-0023 Steel Lock Nuts With Spring For Unistrut Channel *(05 43 00 00-0022)*

Note: Includes hex bolt.

05 43 00 00-0024	EA	1/4-20, Steel Lock Nut With Spring For Unistrut Channel	9.04
05 43 00 00-0025	EA	3/8-16, Steel Lock Nut With Spring For Unistrut Channel	10.12
05 43 00 00-0026	EA	1/2-13, Steel Lock Nut With Spring For Unistrut Channel	10.93
05 43 00 00-0027	EA	5/8-11, Steel Lock Nut With Spring For Unistrut Channel	15.31

05 43 00 00-0028 Stainless Steel Lock Nuts With Spring For Unistrut Channel *(05 43 00 00-0022)*

Note: Includes hex bolt.

05 43 00 00-0029	EA	1/4-20, 316 Stainless Steel Lock Nut With Spring For Unistrut Channel	15.38
05 43 00 00-0030	EA	3/8-16, 316 Stainless Steel Lock Nut With Spring For Unistrut Channel	16.45
05 43 00 00-0031	EA	1/2-13, 316 Stainless Steel Lock Nut With Spring For Unistrut Channel	22.98
05 43 00 00-0032	EA	5/8-11, 316 Stainless Steel Lock Nut With Spring For Unistrut Channel	37.28

05 43 00 00-0033 Lock Nuts Without Spring For Unistrut Channel *(05 43 00 00-0019)*

Note: Includes hex bolt.

05 43 00 00-0034 Steel Lock Nuts Without Spring For Unistrut Channel *(05 43 00 00-0033)*

Note: Includes hex bolt.

05 43 00 00-0035	EA	1/4-20, Steel Lock Nut Without Spring For Unistrut Channel	9.07
05 43 00 00-0036	EA	3/8-16, Steel Lock Nut Without Spring For Unistrut Channel	10.27
05 43 00 00-0037	EA	1/2-13, Steel Lock Nut Without Spring For Unistrut Channel	10.99
05 43 00 00-0038	EA	5/8-11, Steel Lock Nut Without Spring For Unistrut Channel	16.57

05 43 00 00-0039 Stainless Steel Lock Nuts Without Spring For Unistrut Channel *(05 43 00 00-0033)*

Note: Includes hex bolt.

05 43 00 00-0040	EA	1/4-20, 316 Stainless Steel Lock Nut Without Spring For Unistrut Channel	11.41
05 43 00 00-0041	EA	3/8-16, 316 Stainless Steel Lock Nut Without Spring For Unistrut Channel	13.65
05 43 00 00-0042	EA	1/2-13, 316 Stainless Steel Lock Nut Without Spring For Unistrut Channel	15.08
05 43 00 00-0043	EA	5/8-11, 316 Stainless Steel Lock Nut Without Spring For Unistrut Channel	36.35

05 43 00 00-0044 Beam Clamp For Unistrut Channel *(05 43 00 00-0019)*

05 43 00 00-0045	EA	1-5/8" Channel, P2675 Unistrut Beam Clamp	25.26	8.98
05 43 00 00-0046	EA	1-5/8" Channel, P2676 Unistrut Beam Clamp	32.05	8.98
05 43 00 00-0047	EA	Add For Unistrut Swivel Nut, P2676	3.70	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 43 00 00-0048		**Beam Clamp Clevis Hangers For Unistrut Channel** *(05 43 00 00-0019)*		
05 43 00 00-0049	EA	Up To 3/8" Rod, Beam Clamp Clevis Hanger (Unistrut P2674)	27.62	8.98
05 43 00 00-0050	EA	Up To 1/2" Rod, Beam Clamp Clevis Hanger (Unistrut P2677)	33.02	8.98
05 43 00 00-0051	EA	Add For Unistrut Swivel Nut	3.70	
05 43 00 00-0052	EA	6-Hole Electrogalvanized Steel Shelf Bracket For Unistrut	190.71	11.98
05 43 00 00-0053		**Accessories For Unistrut Channel** *(05 43 00 00-0019)*		
05 43 00 00-0054	EA	Trolley Truck Hanger, 1-5/8" Channel P1834	62.85	8.98
05 43 00 00-0055	EA	Flat Plate Fitting, One Hole, 1-5/8" Channel P1064	15.72	5.99
05 43 00 00-0056	EA	60 Degree Angle, 1-5/8" Channel P2097	16.47	5.99
05 43 00 00-0057		**Bases For Unistrut Channel** *(05 43 00 00-0019)*		
05 43 00 00-0058		**Steel Bases For Unistrut Channel** *(05 43 00 00-0057)*		
		Note: Includes straight or angled post mounting and fasteners.		
05 43 00 00-0059	EA	6" x 6", 1-5/8" Height, Single Post, Steel Base For Unistrut Channel	119.51	29.94
05 43 00 00-0060	EA	6" x 6", 3-1/2" Height, Single Post, Steel Base For Unistrut Channel	121.09	29.94
05 43 00 00-0061	EA	6" x 6", 1-5/8" Height, Double Post, Steel Base For Unistrut Channel	174.25	29.94
05 43 00 00-0062	EA	6" x 6", 3-1/2" Height, Double Post, Steel Base For Unistrut Channel	143.16	29.94
05 43 00 00-0063		**Stainless Steel Bases For Unistrut Channel** *(05 43 00 00-0057)*		
		Note: Includes straight or angled post mounting and fasteners.		
05 43 00 00-0064	EA	6" x 6", 1-5/8" Height, Single Post, 304 Stainless Steel Base For Unistrut Channel	240.92	29.94
05 43 00 00-0065	EA	6" x 6", 3-1/2" Height, Single Post, 304 Stainless Steel Base For Unistrut Channel	439.17	29.94
05 43 00 00-0066	EA	6" x 6", 3-1/2" Height, Double Post, 304 Stainless Steel Base For Unistrut Channel	332.79	29.94
05 43 00 00-0067	EA	6" x 6", 1-5/8" Height, Single Post, 316 Stainless Steel Base For Unistrut Channel	493.38	29.94
05 43 00 00-0068	EA	6" x 6", 3-1/2" Height, Double Post, 316 Stainless Steel Base For Unistrut Channel	430.85	29.94
05 43 00 00-0069		**Pipe And Rigid Conduit Clamps** *(05 43 00 00-0019)*		
05 43 00 00-0070		**Pipe And Rigid Conduit Clamps** *(05 43 00 00-0069)*		
		Note: Includes stainless steel (316) hardware.		
05 43 00 00-0071	PR	1/2" Diameter, Pipe And Rigid Steel Conduit Clamps With Stainless Steel (316) Hardware	6.57	2.15
05 43 00 00-0072	PR	3/4" Diameter, Pipe And Rigid Steel Conduit Clamps With Stainless Steel (316) Hardware	6.71	2.15
05 43 00 00-0073	PR	1" Diameter, Pipe And Rigid Steel Conduit Clamps With Stainless Steel (316) Hardware	7.76	2.60
05 43 00 00-0074	PR	1-1/4" Diameter, Pipe And Rigid Steel Conduit Clamps With Stainless Steel (316) Hardware	8.23	2.82
05 43 00 00-0075	PR	1-1/2" Diameter, Pipe And Rigid Steel Conduit Clamps With Stainless Steel (316) Hardware	10.38	3.16
05 43 00 00-0076	PR	2" Diameter, Pipe And Rigid Steel Conduit Clamps With Stainless Steel (316) Hardware	10.38	3.16
05 43 00 00-0077	PR	2-1/2" Diameter, Pipe And Rigid Steel Conduit Clamps With Stainless Steel (316) Hardware	16.01	5.30
05 43 00 00-0078	PR	3" Diameter, Pipe And Rigid Steel Conduit Clamps With Stainless Steel (316) Hardware	16.29	5.30
05 43 00 00-0079	PR	3-1/2" Diameter, Pipe And Rigid Steel Conduit Clamps With Stainless Steel (316) Hardware	17.44	5.86
05 43 00 00-0080	PR	4" Diameter, Pipe And Rigid Steel Conduit Clamps With Stainless Steel (316) Hardware	19.29	6.32
05 43 00 00-0081		**Pipe And Rigid Conduit Clamps** *(05 43 00 00-0069)*		
		Note: Includes nylon hardware.		
05 43 00 00-0082	PR	1/2" Diameter, Pipe And Rigid Steel Conduit Clamps With Nylon Hardware	10.57	2.15
05 43 00 00-0083	PR	3/4" Diameter, Pipe And Rigid Steel Conduit Clamps With Nylon Hardware	10.96	2.15
05 43 00 00-0084	PR	1" Diameter, Pipe And Rigid Steel Conduit Clamps With Nylon Hardware	12.01	2.60
05 43 00 00-0085	PR	1-1/4" Diameter, Pipe And Rigid Steel Conduit Clamps With Nylon Hardware	12.63	2.82
05 43 00 00-0086	PR	1-1/2" Diameter, Pipe And Rigid Steel Conduit Clamps With Nylon Hardware	17.26	3.16
05 43 00 00-0087	PR	2" Diameter, Pipe And Rigid Steel Conduit Clamps With Nylon Hardware	17.26	3.16
05 43 00 00-0088	PR	2-1/2" Diameter, Pipe And Rigid Steel Conduit Clamps With Nylon Hardware	25.30	5.30
05 43 00 00-0089	PR	3" Diameter, Pipe And Rigid Steel Conduit Clamps With Nylon Hardware	26.06	5.30
05 43 00 00-0090	PR	3-1/2" Diameter, Pipe And Rigid Steel Conduit Clamps With Nylon Hardware	27.36	5.86
05 43 00 00-0091	PR	4" Diameter, Pipe And Rigid Steel Conduit Clamps With Nylon Hardware	30.58	6.32

05 45 Metal Support Assemblies *(05 40)*

05 45 16 Electrical Metal Supports *(05 45)*

See CSI section 26 05 29 00-0000 for metal supports.

05 70 Decorative Metal *(05)*

Note: Includes anchors and related accessories.

05 71 Decorative Metal Stairs *(05 70)*

05 71 13 Fabricated Metal Spiral Stairs *(05 71)*

Note: Includes factory prime.

05 71 13 00-0001		**Spiral Stairs, Stock Units** *(05 71 13)*		
		Note: Includes factory prime.		
05 71 13 00-0002		**Steel Tread** *(05 71 13 00-0001)*		
05 71 13 00-0003	VLF	3'-6" Diameter, Spiral Steel Stair With Rails	480.31	58.28
		For Galvanized, Add	*254.63*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 71 13 00-0004	VLF	4' Diameter, Spiral Steel Stair With Rails	546.95	64.10
		For Galvanized, Add	*293.13*	
05 71 13 00-0005	VLF	4'-6" Diameter, Spiral Steel Stair With Rails	605.14	69.93
		For Galvanized, Add	*325.70*	
05 71 13 00-0006	VLF	5' Diameter, Spiral Steel Stair With Rails	648.51	75.76
		For Galvanized, Add	*347.90*	

05 73 Decorative Metal Railings *(05 70)*

Note: Factory primed. Includes brackets.

05 73 23 Decorative Metal Railings *(05 73)*

05 73 23 00-0001 Railings; Vertical Square Bars At 6" *(05 73 23)*

Note: Centers with shaped top rails (round, square, rectangular, diamond, triangular or other shape).

05 73 23 00-0002	LF	Steel Ornamental Handrail Vertical Square Bars At 6", Shaped Top Rail, Up To 42" High	80.04	12.82
		For Rake Or Angle Railings, Add	*11.17*	
		For Curved Railings, Add	*21.09*	
		For 4" On Center Standards, Add	*2.13*	
		For 4-1/2" On Center Standards, Add	*1.70*	
		For 5" On Center Standards, Add	*1.14*	
		For 5-1/2" On Center Standards, Add	*0.57*	
		For Each Field Bending Of Rails, Add	*15.41*	
		For Galvanized, Add	*3.97*	
05 73 23 00-0003	LF	Aluminum Ornamental Handrail Vertical Square Bars At 6", Shaped Top Rail, Up To 42" High	222.41	17.48
		For Rake Or Angle Railings, Add	*22.78*	
		For Curved Railings, Add	*81.80*	
		For 4" On Center Standards, Add	*11.35*	
		For 4-1/2" On Center Standards, Add	*9.08*	
		For 5" On Center Standards, Add	*6.05*	
		For 5-1/2" On Center Standards, Add	*3.03*	
		For Each Field Bending Of Rails, Add	*20.26*	
05 73 23 00-0004	LF	Bronze Ornamental Handrail Vertical Square Bars At 6", Shaped Top Rail, Up To 42" High	164.18	29.13
		For Rake Or Angle Railings, Add	*22.53*	
		For Curved Railings, Add	*44.34*	
		For 4" On Center Standards, Add	*4.62*	
		For 4-1/2" On Center Standards, Add	*3.70*	
		For 5" On Center Standards, Add	*2.46*	
		For 5-1/2" On Center Standards, Add	*1.23*	
		For Each Field Bending Of Rails, Add	*28.14*	
05 73 23 00-0005	LF	Stainless Steel Ornamental Handrail Vertical Square Bars At 6", Shaped Top Rail, Up To 42" High	300.72	23.31
		For Rake Or Angle Railings, Add	*30.64*	
		For Curved Railings, Add	*111.05*	
		For 4" On Center Standards, Add	*15.46*	
		For 4-1/2" On Center Standards, Add	*12.36*	
		For 5" On Center Standards, Add	*8.24*	
		For 5-1/2" On Center Standards, Add	*4.12*	
		For Each Field Bending Of Rails, Add	*26.16*	
05 73 23 00-0006	LF	Black Wrought Iron Ornamental Handrail Vertical Square Bars At 6", Shaped Top Rail, Up To 42" High	420.55	35.55
		For Rake Or Angle Railings, Add	*35.86*	
		For Curved Railings, Add	*174.91*	
		For 4" On Center Standards, Add	*26.21*	
		For 4-1/2" On Center Standards, Add	*20.97*	
		For 5" On Center Standards, Add	*13.98*	
		For 5-1/2" On Center Standards, Add	*6.99*	
		For Each Field Bending Of Rails, Add	*20.27*	

05 73 23 00-0007 Laminated Metal Or Wood Handrails With Metal Supports *(05 73 23)*

05 73 23 00-0008	LF	2-1/2" Laminated Metal Or Wood Handrail Round/Oval Shape With Metal Supports	183.00	5.83
		For Rake Or Angle Railings, Add	*14.44*	
		For Curved Railings, Add	*79.38*	
		For 4" On Center Standards, Add	*12.17*	
		For 4-1/2" On Center Standards, Add	*9.74*	
		For 5" On Center Standards, Add	*6.49*	
		For 5-1/2" On Center Standards, Add	*3.25*	
		For Each Field Bending Of Rails, Add	*7.68*	
		For Exterior Post-Installed Anchors, Add	*11.01*	

05 73 23 00-0009 Plain Handrails *(05 73 23)*

05 73 23 00-0010	LF	2" Brass Handrail	62.03	12.61
05 73 23 00-0011	EA	90 Degree Angle For 2" Brass Handrail	128.64	45.97
05 73 23 00-0012	EA	End Cap For 2" Brass Handrail	58.02	23.04
05 73 23 00-0013	EA	Brass Bracket And Joint For 2" Brass Handrail	97.04	45.97
05 73 23 00-0014	LF	2" Stainless Steel Handrail	73.74	15.77

05 73 23 00-0015 Restoration Of Existing Metal Handrail And Railing *(05 73 23)*

Note: Task includes rust removal by grinding, cleaning, surface prep and one coat of protective primer. See CSI section 09 91 13 00-0369 for painting.

05 73 23 00-0016	LF	Refinish Metal Handrail	11.54
05 73 23 00-0017	LF	Refinish Wrought Iron Balustrade	11.49

copyright 2026 The Gordian Group, Inc.

CSI	MINOR UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 73 23 00-0018		Remove And Reinstall Ornamental Railing *(05 73 23)*		
05 73 23 00-0019	LF	Removal And Reinstallation Of Ornamental Handrail And Pickets	107.22	

05 75 Decorative Formed Metal *(05 70)*

05 75 00 00-0001 Metal Sheets, Installed On Walls *(05 75)*
Note: Includes field fabrication (bending) where noted.

05 75 00 00-0002 Copper Sheets, Installed On Walls *(05 75 00 00-0001)*
Note: Includes field fabrication.

05 75 00 00-0003	SF	0.0162" (12 Ounce) Thick Copper Sheet, Installed On Walls	28.96	2.79
		For >16 To 200, Deduct	*-1.66*	
		For >200 To 500, Deduct	*-3.32*	
		For >500, Deduct	*-4.76*	
05 75 00 00-0004	SF	0.0215" (16 Ounce) Thick Copper Sheet, Installed On Walls	36.00	3.11
		For >16 To 200, Deduct	*-2.03*	
		For >200 To 500, Deduct	*-4.07*	
		For >500, Deduct	*-5.87*	
05 75 00 00-0005	SF	0.0242" (18 Ounce) Thick Copper Sheet, Installed On Walls	39.38	3.35
		For >16 To 200, Deduct	*-2.22*	
		For >200 To 500, Deduct	*-4.44*	
		For >500, Deduct	*-6.41*	
05 75 00 00-0006	SF	0.027" (20 Ounce) Thick Copper Sheet, Installed On Walls	42.49	3.52
		For >16 To 200, Deduct	*-2.39*	
		For >200 To 500, Deduct	*-4.78*	
		For >500, Deduct	*-6.90*	
05 75 00 00-0007	SF	0.0323" (24 Ounce) Thick Copper Sheet, Installed On Walls	48.31	3.68
		For >16 To 200, Deduct	*-2.69*	
		For >200 To 500, Deduct	*-5.38*	
		For >500, Deduct	*-7.80*	
05 75 00 00-0008	SF	0.0431" (32 Ounce) Thick Copper Sheet, Installed On Walls	60.85	3.86
		For >16 To 200, Deduct	*-3.33*	
		For >200 To 500, Deduct	*-6.66*	
		For >500, Deduct	*-9.71*	
05 75 00 00-0009	SF	0.052" (40 Ounce) Thick Copper Sheet, Installed On Walls	71.09	4.03
		For >16 To 200, Deduct	*-3.86*	
		For >200 To 500, Deduct	*-7.71*	
		For >500, Deduct	*-11.27*	
05 75 00 00-0010	SF	0.0646" (48 Ounce) Thick Copper Sheet, Installed On Walls	85.86	4.35
		For >16 To 200, Deduct	*-4.62*	
		For >200 To 500, Deduct	*-9.24*	
		For >500, Deduct	*-13.53*	
05 75 00 00-0011	SF	0.08" Thick Copper Sheet, Installed On Walls	105.17	4.69
		For >16 To 200, Deduct	*-5.61*	
		For >200 To 500, Deduct	*-11.22*	
		For >500, Deduct	*-16.48*	
05 75 00 00-0012	SF	0.125" Thick Copper Sheet, Installed On Walls	153.64	5.03
		For >16 To 200, Deduct	*-8.06*	
		For >200 To 500, Deduct	*-16.12*	
		For >500, Deduct	*-23.80*	

05 75 00 00-0013 Stainless Steel Sheets, Installed On Walls *(05 75 00 00-0001)*
Note: Includes field fabrication.

05 75 00 00-0014	SF	0.026" Thick (24 Gauge) 304 Brushed Stainless Steel Sheet, Installed On Walls	15.74	2.59
		For >16 To 200, Deduct	*-0.98*	
		For >200 To 500, Deduct	*-1.96*	
		For >500, Deduct	*-2.75*	
05 75 00 00-0015	SF	0.0312" Thick (22 Gauge) 304 Brushed Stainless Steel Sheet, Installed On Walls	17.79	2.79
		For >16 To 200, Deduct	*-1.10*	
		For >200 To 500, Deduct	*-2.20*	
		For >500, Deduct	*-3.09*	
05 75 00 00-0016	SF	0.0375" Thick (20 Gauge) 304 Brushed Stainless Steel Sheet, Installed On Walls	19.34	2.93
		For >16 To 200, Deduct	*-1.19*	
		For >200 To 500, Deduct	*-2.37*	
		For >500, Deduct	*-3.34*	
05 75 00 00-0017	SF	0.050" Thick (18 Gauge) 304 Brushed Stainless Steel Sheet, Installed On Walls	22.61	3.07
		For >16 To 200, Deduct	*-1.36*	
		For >200 To 500, Deduct	*-2.72*	
		For >500, Deduct	*-3.85*	
05 75 00 00-0018	SF	0.0625" Thick (16 Gauge) 304 Brushed Stainless Steel Sheet, Installed On Walls	25.78	3.21
		For >16 To 200, Deduct	*-1.53*	
		For >200 To 500, Deduct	*-3.06*	
		For >500, Deduct	*-4.35*	
05 75 00 00-0019	SF	0.078" Thick (14 Gauge) 304 Brushed Stainless Steel Sheet, Installed On Walls	29.77	3.35
		For >16 To 200, Deduct	*-1.74*	
		For >200 To 500, Deduct	*-3.48*	
		For >500, Deduct	*-4.97*	
05 75 00 00-0020	SF	0.125" Thick (11 Gauge) 304 Brushed Stainless Steel Sheet, Installed On Walls	42.69	3.91
		For >16 To 200, Deduct	*-2.43*	
		For >200 To 500, Deduct	*-4.86*	
		For >500, Deduct	*-6.99*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 75 00 00-0021	SF	3/16" Thick (7 Gauge) 304 Brushed Stainless Steel Sheet, Installed On Walls	57.57	4.15
		For >16 To 200, Deduct	*-3.19*	
		For >200 To 500, Deduct	*-6.38*	
		For >500, Deduct	*-9.26*	
05 75 00 00-0022	SF	1/4" Thick (3 Gauge) 304 Brushed Stainless Steel Sheet, Installed On Walls	78.73	5.03
		For >16 To 200, Deduct	*-4.31*	
		For >200 To 500, Deduct	*-8.63*	
		For >500, Deduct	*-12.56*	
05 75 00 00-0023	SF	3/8" Thick 304 Brushed Stainless Steel Sheet, Installed On Walls	131.16	5.39
		For >16 To 200, Deduct	*-6.96*	
		For >200 To 500, Deduct	*-13.92*	
		For >500, Deduct	*-20.48*	
05 75 00 00-0024	SF	1/2" Thick 304 Brushed Stainless Steel Sheet, Installed On Walls	167.74	6.27
		For >16 To 200, Deduct	*-8.86*	
		For >200 To 500, Deduct	*-17.72*	
		For >500, Deduct	*-26.10*	

05 75 00 00-0025 Aluminum Sheets, Installed On Walls *(05 75 00 00-0001)*

Note: Includes field fabrication.

05 75 00 00-0026	SF	0.016" Thick (26 Gauge) Aluminum Sheet, Installed On Walls	12.70	2.79
		For >16 To 200, Deduct	*-0.84*	
		For >200 To 500, Deduct	*-1.69*	
		For >500, Deduct	*-2.32*	
05 75 00 00-0027	SF	0.020" Thick (24 Gauge) Aluminum Sheet, Installed On Walls	14.40	3.11
		For >16 To 200, Deduct	*-0.95*	
		For >200 To 500, Deduct	*-1.91*	
		For >500, Deduct	*-2.63*	
05 75 00 00-0028	SF	0.025" Thick (22 Gauge) Aluminum Sheet, Installed On Walls	16.03	3.35
		For >16 To 200, Deduct	*-1.05*	
		For >200 To 500, Deduct	*-2.11*	
		For >500, Deduct	*-2.91*	
05 75 00 00-0029	SF	0.032" Thick (20 Gauge) Aluminum Sheet, Installed On Walls	17.71	3.52
		For >16 To 200, Deduct	*-1.15*	
		For >200 To 500, Deduct	*-2.30*	
		For >500, Deduct	*-3.19*	
05 75 00 00-0030	SF	0.040" Thick (18 Gauge) Aluminum Sheet, Installed On Walls	19.38	3.68
		For >16 To 200, Deduct	*-1.25*	
		For >200 To 500, Deduct	*-2.49*	
		For >500, Deduct	*-3.46*	
05 75 00 00-0031	SF	0.050" Thick (16 Gauge) Aluminum Sheet, Installed On Walls	21.21	3.86
		For >16 To 200, Deduct	*-1.35*	
		For >200 To 500, Deduct	*-2.70*	
		For >500, Deduct	*-3.76*	
05 75 00 00-0032	SF	0.064" Thick (14 Gauge) Aluminum Sheet, Installed On Walls	23.44	4.03
		For >16 To 200, Deduct	*-1.47*	
		For >200 To 500, Deduct	*-2.95*	
		For >500, Deduct	*-4.12*	
05 75 00 00-0033	SF	0.090" Thick (11 Gauge) Aluminum Sheet, Installed On Walls	27.85	4.69
		For >16 To 200, Deduct	*-1.74*	
		For >200 To 500, Deduct	*-3.49*	
		For >500, Deduct	*-4.88*	

05 75 00 00-0034 Galvanized Steel Sheets, Installed On Walls *(05 75 00 00-0001)*

Note: Includes field fabrication.

05 75 00 00-0035	SF	0.0217" (26 Gauge) Thick Galvanized Steel Sheet, Installed On Walls	11.11	2.79
		For >16 To 200, Deduct	*-0.77*	
		For >200 To 500, Deduct	*-1.53*	
		For >500, Deduct	*-2.09*	
05 75 00 00-0036	SF	0.0276" (24 Gauge) Thick Galvanized Steel Sheet, Installed On Walls	12.33	3.11
		For >16 To 200, Deduct	*-0.85*	
		For >200 To 500, Deduct	*-1.70*	
		For >500, Deduct	*-2.32*	
05 75 00 00-0037	SF	0.0336" (22 Gauge) Thick Galvanized Steel Sheet, Installed On Walls	13.14	3.35
		For >16 To 200, Deduct	*-0.91*	
		For >200 To 500, Deduct	*-1.82*	
		For >500, Deduct	*-2.47*	
05 75 00 00-0038	SF	0.0396" (20 Gauge) Thick Galvanized Steel Sheet, Installed On Walls	13.93	3.52
		For >16 To 200, Deduct	*-0.96*	
		For >200 To 500, Deduct	*-1.92*	
		For >500, Deduct	*-2.62*	
05 75 00 00-0039	SF	0.0516" (18 Gauge) Thick Galvanized Steel Sheet, Installed On Walls	14.92	3.68
		For >16 To 200, Deduct	*-1.02*	
		For >200 To 500, Deduct	*-2.05*	
		For >500, Deduct	*-2.79*	
05 75 00 00-0040	SF	0.0635" (16 Gauge) Thick Galvanized Steel Sheet, Installed On Walls	15.99	3.86
		For >16 To 200, Deduct	*-1.09*	
		For >200 To 500, Deduct	*-2.18*	
		For >500, Deduct	*-2.98*	
05 75 00 00-0041	SF	0.0785" (14 Gauge) Thick Galvanized Steel Sheet, Installed On Walls	17.62	4.03
		For >16 To 200, Deduct	*-1.18*	
		For >200 To 500, Deduct	*-2.37*	
		For >500, Deduct	*-3.25*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
05 75 00 00-0042	SF	0.1084" (12 Gauge) Thick Galvanized Steel Sheet, Installed On Walls	20.03	4.35
		For >16 To 200, Deduct	*-1.33*	
		For >200 To 500, Deduct	*-2.66*	
		For >500, Deduct	*-3.66*	
05 75 00 00-0043	SF	0.1382" (10 Gauge) Thick Galvanized Steel Sheet, Installed On Walls	23.09	5.03
		For >16 To 200, Deduct	*-1.53*	
		For >200 To 500, Deduct	*-3.06*	
		For >500, Deduct	*-4.22*	
05 75 00 00-0044		Galvanized Zinc-Plated Steel Sheets, Installed On Walls *(05 75 00 00-0001)*		
		Note: Includes field fabrication.		
05 75 00 00-0045	SF	0.013" Thick Galvanized Zinc Plated Steel Sheet, Installed On Walls	14.56	2.64
		For >16 To 200, Deduct	*-0.99*	
		For >200 To 500, Deduct	*-1.99*	
		For >500, Deduct	*-2.71*	
05 75 00 00-0046	SF	0.016" Thick Galvanized Zinc Plated Steel Sheet, Installed On Walls	16.77	3.00
		For >16 To 200, Deduct	*-1.14*	
		For >200 To 500, Deduct	*-2.28*	
		For >500, Deduct	*-3.12*	
05 75 00 00-0047	SF	0.019" Thick Galvanized Zinc Plated Steel Sheet, Installed On Walls	18.94	3.32
		For >16 To 200, Deduct	*-1.28*	
		For >200 To 500, Deduct	*-2.56*	
		For >500, Deduct	*-3.51*	
05 75 00 00-0048	SF	0.024" Thick Galvanized Zinc Plated Steel Sheet, Installed On Walls	20.85	3.59
		For >16 To 200, Deduct	*-1.40*	
		For >200 To 500, Deduct	*-2.80*	
		For >500, Deduct	*-3.85*	

END OF SECTION 05

copyright 2026 The Gordian Group, Inc.

CSI	MINOR UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

THIS PAGE INTENTIONALLY LEFT BLANK

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

06 Wood, Plastics, and Composites

06 01 Maintenance of Wood, Plastics, and Composites *(06)*

06 01 20 Maintenance of Finish Carpentry *(06 01)*

06 01 20 91 Finish Carpentry Restoration *(06 01 20)*

06 01 20 91-0001 Wood Trim Repair *(06 01 20 91)*

06 01 20 91-0002	SF	Restoration Of Existing Decorative Woodwork		10.64	
		Note: Includes stripping to bare wood, filling or patching, stain or paint to match existing.			

06 05 Common Work Results for Wood, Plastics, and Composites *(06)*

06 05 23 Wood, Plastic, and Composite Fastenings *(06 05)*

Note: For additional fasteners above normal conditions, for replacing existing fasteners, for relocating existing materials or fixtures, or for different fasteners required due to load limits on standard fasteners.

06 05 23 00-0001 Threaded Anchor Bolts *(06 05 23)*

Note: Threaded on two ends with two nuts and flat washers.

06 05 23 00-0002	EA	1/2" Diameter x 4" Long, Threaded Anchor Bolt		14.97	
		For >10 To 50, Deduct	*-0.51*		
		For >50 To 100, Deduct	*-1.14*		
		For >100 To 250, Deduct	*-2.28*		
		For >250 To 500, Deduct	*-3.93*		
		For >500, Deduct	*-5.58*		
06 05 23 00-0003	EA	1/2" Diameter x 7-1/2" Long, Threaded Anchor Bolt		19.10	
		For >10 To 50, Deduct	*-0.55*		
		For >50 To 100, Deduct	*-1.30*		
		For >100 To 250, Deduct	*-2.60*		
		For >250 To 500, Deduct	*-4.45*		
		For >500, Deduct	*-6.31*		
06 05 23 00-0004	EA	3/4" Diameter x 7-1/2" Long, Threaded Anchor Bolt		20.87	
		For >10 To 50, Deduct	*-0.55*		
		For >50 To 100, Deduct	*-1.35*		
		For >100 To 250, Deduct	*-2.69*		
		For >250 To 500, Deduct	*-4.59*		
		For >500, Deduct	*-6.48*		
06 05 23 00-0005	EA	3/4" Diameter x 12" Long, Threaded Anchor Bolt		38.89	
		For >10 To 50, Deduct	*-0.75*		
		For >50 To 100, Deduct	*-2.10*		
		For >100 To 250, Deduct	*-4.20*		
		For >250 To 500, Deduct	*-7.05*		
		For >500, Deduct	*-9.90*		

06 05 23 00-0006 Framing Anchors *(06 05 23)*

Note: Including nails.

06 05 23 00-0007	EA	1-7/16" x 2-1/2", 18 Gauge, Galvanized Framing Angle Anchor (Simpson Strong Tie® A34)		9.02	4.28
		For >10 To 50, Deduct	*-0.41*		
		For >50 To 100, Deduct	*-0.84*		
		For >100 To 250, Deduct	*-1.68*		
		For >250 To 500, Deduct	*-2.92*		
		For >500, Deduct	*-4.17*		
06 05 23 00-0008	EA	1-7/16" x 4-1/2", 18 Gauge, Galvanized Framing Angle Anchor (Simpson Strong Tie® A35)		10.07	4.71
		For >10 To 50, Deduct	*-0.46*		
		For >50 To 100, Deduct	*-0.94*		
		For >100 To 250, Deduct	*-1.88*		
		For >250 To 500, Deduct	*-3.28*		
		For >500, Deduct	*-4.68*		

06 05 23 00-0009 Angle Anchors *(06 05 23)*

Note: Including nails.

06 05 23 00-0010	EA	2" x 1-1/2" x 1-3/8" Wide, 18 Gauge Galvanized Angle Anchor (Simpson Strong Tie® A21)		9.13	4.28
		For >10 To 50, Deduct	*-0.41*		
		For >50 To 100, Deduct	*-0.84*		
		For >100 To 250, Deduct	*-1.68*		
		For >250 To 500, Deduct	*-2.93*		
		For >500, Deduct	*-4.18*		
06 05 23 00-0011	EA	2" x 1-1/2" x 2-3/4" Wide, 18 Gauge Galvanized Angle Anchor (Simpson Strong Tie® A23)		10.00	4.57
		For >10 To 50, Deduct	*-0.44*		
		For >50 To 100, Deduct	*-0.90*		
		For >100 To 250, Deduct	*-1.81*		
		For >250 To 500, Deduct	*-3.15*		
		For >500, Deduct	*-4.48*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 05 23 00-0012	EA	3-7/8" x 2" x 2-1/2" Wide, 12 Gauge Galvanized Angle Anchor (Simpson Strong Tie® A24)	17.00	4.71
		For >10 To 50, Deduct	*-0.46*	
		For >50 To 100, Deduct	*-1.11*	
		For >100 To 250, Deduct	*-2.23*	
		For >250 To 500, Deduct	*-3.80*	
		For >500, Deduct	*-5.37*	
06 05 23 00-0013	EA	3" x 3" x 1-1/2" Wide, 18 Gauge Galvanized Angle Anchor (Simpson Strong Tie® A33)	15.35	4.71
		For >10 To 50, Deduct	*-0.46*	
		For >50 To 100, Deduct	*-1.07*	
		For >100 To 250, Deduct	*-2.14*	
		For >250 To 500, Deduct	*-3.68*	
		For >500, Deduct	*-5.21*	
06 05 23 00-0014	EA	4-9/16" x 4-9/16" x 1-1/2" Wide, 18 Gauge Galvanized Angle Anchor (Simpson Strong Tie® A44)	16.78	5.29
		For >10 To 50, Deduct	*-0.51*	
		For >50 To 100, Deduct	*-1.18*	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-4.04*	
		For >500, Deduct	*-5.72*	
06 05 23 00-0015	EA	5-7/8" x 5-7/8" x 1-1/2" Wide, 18 Gauge Galvanized Angle Anchor (Simpson Strong Tie® A66)	19.00	5.57
		For >10 To 50, Deduct	*-0.54*	
		For >50 To 100, Deduct	*-1.29*	
		For >100 To 250, Deduct	*-2.58*	
		For >250 To 500, Deduct	*-4.41*	
		For >500, Deduct	*-6.25*	
06 05 23 00-0016		Reinforcing Angle Wood Construction Connectors *(06 05 23)*		
		Note: Including nails.		
06 05 23 00-0017	EA	3" x 3-3/4", 16 Gauge, Galvanized Reinforcing Angle Wood Construction Connectors (Simpson Strong Tie® L30)	10.00	4.00
		For >10 To 50, Deduct	*-0.41*	
		For >50 To 100, Deduct	*-0.86*	
		For >100 To 250, Deduct	*-1.72*	
		For >250 To 500, Deduct	*-2.99*	
		For >500, Deduct	*-4.26*	
06 05 23 00-0018	EA	5" x 3-3/4", 16 Gauge, Galvanized Reinforcing Angle Wood Construction Connectors (Simpson Strong Tie® L50)	12.30	4.28
		For >10 To 50, Deduct	*-0.43*	
		For >50 To 100, Deduct	*-0.96*	
		For >100 To 250, Deduct	*-1.91*	
		For >250 To 500, Deduct	*-3.30*	
		For >500, Deduct	*-4.69*	
06 05 23 00-0019	EA	7" x 3-3/4", 16 Gauge, Galvanized Reinforcing Angle Wood Construction Connectors (Simpson Strong Tie® L70)	13.96	4.42
		For >10 To 50, Deduct	*-0.45*	
		For >50 To 100, Deduct	*-1.02*	
		For >100 To 250, Deduct	*-2.04*	
		For >250 To 500, Deduct	*-3.50*	
		For >500, Deduct	*-4.97*	
06 05 23 00-0020	EA	9" x 3-3/4", 16 Gauge, Galvanized Reinforcing Angle Wood Construction Connectors (Simpson Strong Tie® L90)	15.47	4.57
		For >10 To 50, Deduct	*-0.47*	
		For >50 To 100, Deduct	*-1.09*	
		For >100 To 250, Deduct	*-2.18*	
		For >250 To 500, Deduct	*-3.74*	
		For >500, Deduct	*-5.30*	
06 05 23 00-0021	EA	3-3/8" x 3-3/4", 18 Gauge, Galvanized Reinforcing Skewable Angle Wood Construction Connectors (Simpson Strong Tie® LS30)	10.89	4.00
		For >10 To 50, Deduct	*-0.41*	
		For >50 To 100, Deduct	*-0.88*	
		For >100 To 250, Deduct	*-1.77*	
		For >250 To 500, Deduct	*-3.06*	
		For >500, Deduct	*-4.35*	
06 05 23 00-0022	EA	4-7/8" x 3-3/4", 18 Gauge, Galvanized Reinforcing Skewable Angle Wood Construction Connectors (Simpson Strong Tie® LS50)	11.99	4.28
		For >10 To 50, Deduct	*-0.43*	
		For >50 To 100, Deduct	*-0.95*	
		For >100 To 250, Deduct	*-1.90*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-4.66*	
06 05 23 00-0023	EA	6-3/8" x 3-3/4", 18 Gauge, Galvanized Reinforcing Skewable Angle Wood Construction Connectors (Simpson Strong Tie® LS70)	13.88	4.42
		For >10 To 50, Deduct	*-0.45*	
		For >50 To 100, Deduct	*-1.02*	
		For >100 To 250, Deduct	*-2.03*	
		For >250 To 500, Deduct	*-3.50*	
		For >500, Deduct	*-4.96*	
06 05 23 00-0024	EA	7-7/8" x 3-3/4", 18 Gauge, Galvanized Reinforcing Skewable Angle Wood Construction Connectors (Simpson Strong Tie® LS90)	16.42	4.57
		For >10 To 50, Deduct	*-0.47*	
		For >50 To 100, Deduct	*-1.11*	
		For >100 To 250, Deduct	*-2.23*	
		For >250 To 500, Deduct	*-3.81*	
		For >500, Deduct	*-5.39*	
06 05 23 00-0025		Hold Down Anchors *(06 05 23)*		
		Note: Including nails.		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 05 23 00-0026	EA	8-5/8" High x 2-1/2" Wide x 2-1/4" Deep, 12 Gauge, Galvanized Hold Downs (Simpson Strong Tie® HD3B)	71.67	
		For >10 To 50, Deduct	*-2.21*	
		For >50 To 100, Deduct	*-5.11*	
		For >100 To 250, Deduct	*-10.22*	
		For >250 To 500, Deduct	*-17.55*	
		For >500, Deduct	*-24.87*	
06 05 23 00-0027	EA	9-3/8" High x 2-1/2" Wide x 2-1/2" Deep, 10 Gauge, Galvanized Hold Downs (Simpson Strong Tie® HD5B)	99.57	
		For >10 To 50, Deduct	*-2.28*	
		For >50 To 100, Deduct	*-5.92*	
		For >100 To 250, Deduct	*-11.83*	
		For >250 To 500, Deduct	*-20.03*	
		For >500, Deduct	*-28.23*	
06 05 23 00-0028	EA	12-3/8" High x 2-1/2" Wide x 2-1/2" Deep, 10 Gauge, Galvanized Hold Downs (Simpson Strong Tie® HD7B)	122.43	
		For >10 To 50, Deduct	*-2.43*	
		For >50 To 100, Deduct	*-6.70*	
		For >100 To 250, Deduct	*-13.40*	
		For >250 To 500, Deduct	*-22.53*	
		For >500, Deduct	*-31.66*	
06 05 23 00-0029	EA	14" High x 2-1/2" Wide x 2-1/2" Deep, 7 Gauge, Galvanized Hold Downs (Simpson Strong Tie® HD9B)	144.33	
		For >10 To 50, Deduct	*-2.71*	
		For >50 To 100, Deduct	*-7.68*	
		For >100 To 250, Deduct	*-15.35*	
		For >250 To 500, Deduct	*-25.74*	
		For >500, Deduct	*-36.13*	
06 05 23 00-0030	EA	20-5/16" High x 3-1/2" Wide x 4-1/2" Deep, 3 Gauge, Galvanized Hold Downs (Simpson Strong Tie® HD12)	232.87	
		For >10 To 50, Deduct	*-3.43*	
		For >50 To 100, Deduct	*-10.96*	
		For >100 To 250, Deduct	*-21.92*	
		For >250 To 500, Deduct	*-36.31*	
		For >500, Deduct	*-50.70*	
06 05 23 00-0031	EA	24-1/2" High x 3-1/2" Wide x 4-1/2" Deep, 3 Gauge, Galvanized Hold Downs (Simpson Strong Tie® HD19)	312.60	
		For >10 To 50, Deduct	*-3.57*	
		For >50 To 100, Deduct	*-13.17*	
		For >100 To 250, Deduct	*-26.34*	
		For >250 To 500, Deduct	*-43.08*	
		For >500, Deduct	*-59.82*	
06 05 23 00-0032	EA	8-11/16" Height x 3" Wide x 3-1/4" Deep, 14 Gauge, Galvanized Predeflected Holdown With Screws (Simpson Strong Tie® HDU2-SDS2.5)	83.99	
		For >10 To 50, Deduct	*-2.21*	
		For >50 To 100, Deduct	*-5.42*	
		For >100 To 250, Deduct	*-10.84*	
		For >250 To 500, Deduct	*-18.47*	
		For >500, Deduct	*-26.10*	
06 05 23 00-0033	EA	10-15/16" Height x 3" Wide x 3-1/4" Deep, 14 Gauge, Galvanized Predeflected Holdown With Screws (Simpson Strong Tie® HDU4-SDS2.5)	92.77	
		For >10 To 50, Deduct	*-2.28*	
		For >50 To 100, Deduct	*-5.75*	
		For >100 To 250, Deduct	*-11.49*	
		For >250 To 500, Deduct	*-19.52*	
		For >500, Deduct	*-27.55*	
06 05 23 00-0034	EA	13-3/16" Height x 3" Wide x 3-1/4" Deep, 14 Gauge, Galvanized Predeflected Holdown With Screws (Simpson Strong Tie® HDU5-SDS2.5)	103.78	
		For >10 To 50, Deduct	*-2.43*	
		For >50 To 100, Deduct	*-6.24*	
		For >100 To 250, Deduct	*-12.47*	
		For >250 To 500, Deduct	*-21.13*	
		For >500, Deduct	*-29.80*	
06 05 23 00-0035	EA	16-5/8" Height x 3" Wide x 3-1/2" Deep, 10 Gauge, Galvanized Predeflected Holdown With Screws (Simpson Strong Tie® HDU8-SDS2.5)	127.85	
		For >10 To 50, Deduct	*-2.71*	
		For >50 To 100, Deduct	*-7.27*	
		For >100 To 250, Deduct	*-14.53*	
		For >250 To 500, Deduct	*-24.51*	
		For >500, Deduct	*-34.49*	
06 05 23 00-0036	EA	22-1/4" Height x 3" Wide x 3-1/2" Deep, 10 Gauge, Galvanized Predeflected Holdown With Screws (Simpson Strong Tie® HDU11-SDS2.5)	164.58	
		For >10 To 50, Deduct	*-3.43*	
		For >50 To 100, Deduct	*-9.26*	
		For >100 To 250, Deduct	*-18.51*	
		For >250 To 500, Deduct	*-31.19*	
		For >500, Deduct	*-43.87*	
06 05 23 00-0037	EA	25-11/16" Height x 3" Wide x 3-1/2" Deep, 7 Gauge, Galvanized Predeflected Holdown With Screws (Simpson Strong Tie® HDU14-SDS2.5)	183.60	
		For >10 To 50, Deduct	*-3.57*	
		For >50 To 100, Deduct	*-9.94*	
		For >100 To 250, Deduct	*-19.89*	
		For >250 To 500, Deduct	*-33.40*	
		For >500, Deduct	*-46.92*	

06 05 23 00-0038 Joist And Beam Hangers *(06 05 23)*

Note: Including nails.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 05 23 00-0039	EA	18 Gauge, Galvanized Joist Hanger, For 2" x 4" Joist Also Acceptable For Beam Hangers (Simpson Strong Tie® LU24)	9.57	4.00
		For >10 To 50, Deduct	*-0.41*	
		For >50 To 100, Deduct	*-0.85*	
		For >100 To 250, Deduct	*-1.70*	
		For >250 To 500, Deduct	*-2.96*	
		For >500, Deduct	*-4.22*	
06 05 23 00-0040	EA	18 Gauge, Galvanized Joist Hanger, For 2" x 6" To 2" x 10" Joist, Also Acceptable For Beam Hangers (Simpson Strong Tie® LU28)	10.64	4.28
		For >10 To 50, Deduct	*-0.43*	
		For >50 To 100, Deduct	*-0.91*	
		For >100 To 250, Deduct	*-1.83*	
		For >250 To 500, Deduct	*-3.18*	
		For >500, Deduct	*-4.52*	
06 05 23 00-0041	EA	16 Gauge, Galvanized Joist Hanger, For 3" x 6" To 3" x 9" Joist, Also Acceptable For Beam Hangers (Simpson Strong Tie® LUS36)	14.77	4.42
		For >10 To 50, Deduct	*-0.45*	
		For >50 To 100, Deduct	*-1.04*	
		For >100 To 250, Deduct	*-2.08*	
		For >250 To 500, Deduct	*-3.56*	
		For >500, Deduct	*-5.05*	
06 05 23 00-0042	EA	16 Gauge, Galvanized Joist Hanger, For 3" x 10" To 3" x 14" Joist, Also Acceptable For Beam Hangers (Simpson Strong Tie® LUS310)	16.05	4.57
		For >10 To 50, Deduct	*-0.47*	
		For >50 To 100, Deduct	*-1.10*	
		For >100 To 250, Deduct	*-2.21*	
		For >250 To 500, Deduct	*-3.78*	
		For >500, Deduct	*-5.35*	
06 05 23 00-0043	EA	14 Gauge, Galvanized Joist Hanger, For 4" x 6" To 4" x 8" Joist, Also Acceptable For Beam Hangers (Simpson Strong Tie® HUS46)	24.32	4.85
		For >10 To 50, Deduct	*-0.48*	
		For >50 To 100, Deduct	*-1.33*	
		For >100 To 250, Deduct	*-2.66*	
		For >250 To 500, Deduct	*-4.48*	
		For >500, Deduct	*-6.29*	
06 05 23 00-0044	EA	14 Gauge, Galvanized Joist Hanger, For 4" x 10" To 4" x 14" Joist, Also Acceptable For Beam Hangers (Simpson Strong Tie® HUS412)	28.89	5.00
		For >10 To 50, Deduct	*-0.49*	
		For >50 To 100, Deduct	*-1.46*	
		For >100 To 250, Deduct	*-2.93*	
		For >250 To 500, Deduct	*-4.88*	
		For >500, Deduct	*-6.84*	

06 05 23 00-0045 Anchor And Ties *(06 05 23)*

Note: Including nails.

06 05 23 00-0046	EA	12-3/8" Long, 11 Gauge, Galvanized Heavy Tension Tie (Simpson Strong Tie® HTT4) Note: Includes nails. Excludes anchor bolt.	43.69	
06 05 23 00-0047	EA	16" Long, 11 Gauge, Galvanized Heavy Tension Tie (Simpson Strong Tie® HTT5) Note: Includes nails. Excludes anchor bolt.	54.12	
06 05 23 00-0048	EA	16 Gauge, Zinc Galvanized Finish Mudsill Anchor (Simpson Strong Tie® MASAZ)	5.88	
06 05 23 00-0049	EA	16 Gauge, Zinc Galvanized Finish Mudsill Anchor (Simpson Strong Tie® MASBZ)	6.60	

06 05 23 00-0050 Hurricane Ties *(06 05 23)*

06 05 23 00-0051	EA	6" x 1-3/8" Wide, 18 Gauge, Galvanized Finish Hurricane Ties (Simpson Strong Tie® H2.5A)	10.52	4.42
		For >10 To 50, Deduct	*-0.49*	
		For >50 To 100, Deduct	*-1.00*	
		For >100 To 250, Deduct	*-2.00*	
		For >250 To 500, Deduct	*-3.50*	
		For >500, Deduct	*-4.99*	
06 05 23 00-0052	EA	6" x 1-3/8" Wide, 18 Gauge, Zinc Galvanized Finish Hurricane Ties (Simpson Strong Tie® H2.5AZ)	3.78	
06 05 23 00-0053	EA	6" x 1-3/8" Wide, 18 Gauge, Stainless Steel Hurricane Ties (Simpson Strong Tie® H2.5ASS)	10.02	
06 05 23 00-0054	EA	10-7/16" x 1-1/2" Wide, 18 Gauge, Galvanized Finish Hurricane Ties (Simpson Strong Tie® H2A)	12.84	4.42
		For >10 To 50, Deduct	*-0.49*	
		For >50 To 100, Deduct	*-1.06*	
		For >100 To 250, Deduct	*-2.12*	
		For >250 To 500, Deduct	*-3.67*	
		For >500, Deduct	*-5.22*	
06 05 23 00-0055	EA	19-3/16" x 2-1/4" Wide, 18 Gauge, Galvanized Finish Hurricane Ties (Simpson Strong Tie® H6)	21.02	

06 05 23 00-0056 Post Column Bases *(06 05 23)*

Note: Including nails.

06 05 23 00-0057	EA	Adjustable And Standoff 4" x 4" Post Base, With Bolts (Simpson Strong Tie® ABA44)	38.83	
06 05 23 00-0058	EA	Adjustable And Standoff 4" x 6" Post Base, With Bolts (Simpson Strong Tie® ABA46)	59.87	
06 05 23 00-0059	EA	Adjustable And Standoff 6" x 6" Post Base, With Bolts (Simpson Strong Tie® ABA66)	61.70	

06 05 23 00-0060 Post Column Caps *(06 05 23)*

Note: Including nails.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 05 23 00-0061	EA	4" Beam, 4" Post Flange, 18 Gauge, Galvanized Post Cap (Simpson Strong Tie® BC4)	21.73	5.00
		For >10 To 50, Deduct	*-0.55*	
		For >50 To 100, Deduct	*-1.37*	
		For >100 To 250, Deduct	*-2.74*	
		For >250 To 500, Deduct	*-4.65*	
		For >500, Deduct	*-6.57*	
06 05 23 00-0062	EA	6" Beam, 6" Post Flange, 18 Gauge, Galvanized Post Cap (Simpson Strong Tie® BC6)	47.17	5.00
		For >10 To 50, Deduct	*-0.58*	
		For >50 To 100, Deduct	*-2.05*	
		For >100 To 250, Deduct	*-4.10*	
		For >250 To 500, Deduct	*-6.73*	
		For >500, Deduct	*-9.36*	
06 05 23 00-0063	EA	3-1/8" Beam, 4" Post, 7 Gauge, Gray Paint Column Cap With Bolts (Simpson Strong Tie® CC3 1/4-4) Note: Excludes field welding	231.30	
		For >10 To 50, Deduct	*-1.43*	
		For >50 To 100, Deduct	*-7.92*	
		For >100 To 250, Deduct	*-15.85*	
		For >250 To 500, Deduct	*-25.20*	
		For >500, Deduct	*-34.55*	
		For Hot Dipped Galvanized, Add	*91.24*	
06 05 23 00-0064	EA	3-1/8" Beam, 6" Post, 7 Gauge, Gray Paint Column Cap With Bolts (Simpson Strong Tie® CC3 1/4-6)	241.00	
		For >10 To 50, Deduct	*-1.61*	
		For >50 To 100, Deduct	*-8.43*	
		For >100 To 250, Deduct	*-16.87*	
		For >250 To 500, Deduct	*-26.91*	
		For >500, Deduct	*-36.95*	
		For Hot Dipped Galvanized, Add	*94.00*	
06 05 23 00-0065	EA	4" Beam, 4" Post, 7 Gauge, Gray Paint Column Cap With Bolts (Simpson Strong Tie® CC44) Note: Excludes field welding	149.17	
		For >10 To 50, Deduct	*-1.43*	
		For >50 To 100, Deduct	*-5.87*	
		For >100 To 250, Deduct	*-11.74*	
		For >250 To 500, Deduct	*-19.04*	
		For >500, Deduct	*-26.34*	
		For Hot Dipped Galvanized, Add	*54.28*	
06 05 23 00-0066	EA	4" Beam, 6" Post, 7 Gauge, Gray Paint Column Cap With Bolts (Simpson Strong Tie® CC46)	236.01	
		For >10 To 50, Deduct	*-1.61*	
		For >50 To 100, Deduct	*-8.31*	
		For >100 To 250, Deduct	*-16.62*	
		For >250 To 500, Deduct	*-26.53*	
		For >500, Deduct	*-36.45*	
		For Hot Dipped Galvanized, Add	*91.75*	
06 05 23 00-0067	EA	4" Beam, 8" Post, 7 Gauge, Gray Paint Column Cap With Bolts (Simpson Strong Tie® CC48) Note: Excludes field welding	246.79	
		For >10 To 50, Deduct	*-1.61*	
		For >50 To 100, Deduct	*-8.58*	
		For >100 To 250, Deduct	*-17.16*	
		For >250 To 500, Deduct	*-27.34*	
		For >500, Deduct	*-37.53*	
		For Hot Dipped Galvanized, Add	*96.60*	
06 05 23 00-0068	EA	6" Beam, 4" Post, 7 Gauge, Gray Paint Column Cap With Bolts (Simpson Strong Tie® CC64)	252.11	
		For >10 To 50, Deduct	*-1.54*	
		For >50 To 100, Deduct	*-8.61*	
		For >100 To 250, Deduct	*-17.21*	
		For >250 To 500, Deduct	*-27.35*	
		For >500, Deduct	*-37.49*	
		For Hot Dipped Galvanized, Add	*99.63*	
06 05 23 00-0069	EA	6" Beam, 6" Post, 7 Gauge, Gray Paint Column Cap With Bolts (Simpson Strong Tie® CC66)	254.97	
		For >10 To 50, Deduct	*-1.68*	
		For >50 To 100, Deduct	*-8.89*	
		For >100 To 250, Deduct	*-17.78*	
		For >250 To 500, Deduct	*-28.35*	
		For >500, Deduct	*-38.92*	
		For Hot Dipped Galvanized, Add	*99.63*	
06 05 23 00-0070	EA	6" Beam, 8" Post, 7 Gauge, Gray Paint Column Cap With Bolts (Simpson Strong Tie® CC68)	254.97	
		For >10 To 50, Deduct	*-1.68*	
		For >50 To 100, Deduct	*-8.89*	
		For >100 To 250, Deduct	*-17.78*	
		For >250 To 500, Deduct	*-28.35*	
		For >500, Deduct	*-38.92*	
		For Hot Dipped Galvanized, Add	*99.63*	
06 05 23 00-0071	EA	5-1/8" Beam, 4" Post, 3 Gauge, Gray Paint Column Cap With Bolts (Simpson Strong Tie® CC5 1/4-4)	294.43	
		For >10 To 50, Deduct	*-1.54*	
		For >50 To 100, Deduct	*-9.66*	
		For >100 To 250, Deduct	*-19.33*	
		For >250 To 500, Deduct	*-30.52*	
		For >500, Deduct	*-41.72*	
		For Hot Dipped Galvanized, Add	*118.68*	
06 05 23 00-0072	EA	5-1/8" Beam, 6" Post, 3 Gauge, Gray Paint Column Cap With Bolts (Simpson Strong Tie® CC5 1/4-6)	297.29	
		For >10 To 50, Deduct	*-1.68*	
		For >50 To 100, Deduct	*-9.95*	
		For >100 To 250, Deduct	*-19.90*	
		For >250 To 500, Deduct	*-31.53*	
		For >500, Deduct	*-43.15*	
		For Hot Dipped Galvanized, Add	*118.68*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 05 23 00-0073	EA	5-1/8" Beam, 8" Post, 3 Gauge, Gray Paint Column Cap With Bolts (Simpson Strong Tie® CC5 1/4-8)	297.29	
		For >10 To 50, Deduct	*-1.68*	
		For >50 To 100, Deduct	*-9.95*	
		For >100 To 250, Deduct	*-19.90*	
		For >250 To 500, Deduct	*-31.53*	
		For >500, Deduct	*-43.15*	
		For Hot Dipped Galvanized, Add	*118.68*	
06 05 23 00-0074	EA	8" Beam, 4" Post, 3 Gauge, Gray Paint Column Cap With Bolts (Simpson Strong Tie® CC84)	359.95	
		For >10 To 50, Deduct	*-1.54*	
		For >50 To 100, Deduct	*-11.30*	
		For >100 To 250, Deduct	*-22.60*	
		For >250 To 500, Deduct	*-35.44*	
		For >500, Deduct	*-48.28*	
		For Hot Dipped Galvanized, Add	*148.16*	
06 05 23 00-0075	EA	8" Beam, 6" Post, 3 Gauge, Gray Paint Column Cap With Bolts (Simpson Strong Tie® CC86)	362.81	
		For >10 To 50, Deduct	*-1.68*	
		For >50 To 100, Deduct	*-11.59*	
		For >100 To 250, Deduct	*-23.17*	
		For >250 To 500, Deduct	*-36.44*	
		For >500, Deduct	*-49.71*	
		For Hot Dipped Galvanized, Add	*148.16*	
06 05 23 00-0076	EA	8" Beam, 8" Post, 3 Gauge, Gray Paint Column Cap With Bolts (Simpson Strong Tie® CC88)	362.81	
		For >10 To 50, Deduct	*-1.68*	
		For >50 To 100, Deduct	*-11.59*	
		For >100 To 250, Deduct	*-23.17*	
		For >250 To 500, Deduct	*-36.44*	
		For >500, Deduct	*-49.71*	
		For Hot Dipped Galvanized, Add	*148.16*	
06 05 23 00-0077	EA	3-1/8" Beam, 4" Post, 7 Gauge, Gray Paint End Column Cap With Bolts (Simpson Strong Tie® ECC3 1/4-4) Note: Excludes field welding	231.30	
		For >10 To 50, Deduct	*-1.43*	
		For >50 To 100, Deduct	*-7.92*	
		For >100 To 250, Deduct	*-15.85*	
		For >250 To 500, Deduct	*-25.20*	
		For >500, Deduct	*-34.55*	
		For Hot Dipped Galvanized, Add	*91.24*	
06 05 23 00-0078	EA	3-1/8" Beam, 6" Post, 7 Gauge, Gray Paint End Column Cap With Bolts (Simpson Strong Tie® ECC3 1/4-6)	241.00	
		For >10 To 50, Deduct	*-1.61*	
		For >50 To 100, Deduct	*-8.43*	
		For >100 To 250, Deduct	*-16.87*	
		For >250 To 500, Deduct	*-26.91*	
		For >500, Deduct	*-36.95*	
		For Hot Dipped Galvanized, Add	*94.00*	
06 05 23 00-0079	EA	4" Beam, 4" Post, 7 Gauge, Gray Paint End Column Cap With Bolts (Simpson Strong Tie® ECC44) Note: Excludes field welding	149.17	
		For >10 To 50, Deduct	*-1.43*	
		For >50 To 100, Deduct	*-5.87*	
		For >100 To 250, Deduct	*-11.74*	
		For >250 To 500, Deduct	*-19.04*	
		For >500, Deduct	*-26.34*	
		For Hot Dipped Galvanized, Add	*54.28*	
06 05 23 00-0080	EA	4" Beam, 6" Post, 7 Gauge, Gray Paint End Column Cap With Bolts (Simpson Strong Tie® ECC46)	236.01	
		For >10 To 50, Deduct	*-1.61*	
		For >50 To 100, Deduct	*-8.31*	
		For >100 To 250, Deduct	*-16.62*	
		For >250 To 500, Deduct	*-26.53*	
		For >500, Deduct	*-36.45*	
		For Hot Dipped Galvanized, Add	*91.75*	
06 05 23 00-0081	EA	4" Beam, 8" Post, 7 Gauge, Gray Paint End Column Cap With Bolts (Simpson Strong Tie® ECC48) Note: Excludes field welding	246.79	
		For >10 To 50, Deduct	*-1.61*	
		For >50 To 100, Deduct	*-8.58*	
		For >100 To 250, Deduct	*-17.16*	
		For >250 To 500, Deduct	*-27.34*	
		For >500, Deduct	*-37.53*	
		For Hot Dipped Galvanized, Add	*96.60*	
06 05 23 00-0082	EA	6" Beam, 4" Post, 7 Gauge, Gray Paint End Column Cap With Bolts (Simpson Strong Tie® ECC64)	252.11	
		For >10 To 50, Deduct	*-1.54*	
		For >50 To 100, Deduct	*-8.61*	
		For >100 To 250, Deduct	*-17.21*	
		For >250 To 500, Deduct	*-27.35*	
		For >500, Deduct	*-37.49*	
		For Hot Dipped Galvanized, Add	*99.63*	
06 05 23 00-0083	EA	6" Beam, 6" Post, 7 Gauge, Gray Paint End Column Cap With Bolts (Simpson Strong Tie® ECC66)	254.97	
		For >10 To 50, Deduct	*-1.68*	
		For >50 To 100, Deduct	*-8.89*	
		For >100 To 250, Deduct	*-17.78*	
		For >250 To 500, Deduct	*-28.35*	
		For >500, Deduct	*-38.92*	
		For Hot Dipped Galvanized, Add	*99.63*	
06 05 23 00-0084	EA	6" Beam, 8" Post, 7 Gauge, Gray Paint End Column Cap With Bolts (Simpson Strong Tie® ECC68)	254.97	
		For >10 To 50, Deduct	*-1.68*	
		For >50 To 100, Deduct	*-8.89*	
		For >100 To 250, Deduct	*-17.78*	
		For >250 To 500, Deduct	*-28.35*	
		For >500, Deduct	*-38.92*	
		For Hot Dipped Galvanized, Add	*99.63*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 05 23 00-0085	EA	5-1/8" Beam, 4" Post, 3 Gauge, Gray Paint End Column Cap With Bolts (Simpson Strong Tie® ECC5 1/4-4)	294.43	
		For >10 To 50, Deduct	*-1.54*	
		For >50 To 100, Deduct	*-9.66*	
		For >100 To 250, Deduct	*-19.33*	
		For >250 To 500, Deduct	*-30.52*	
		For >500, Deduct	*-41.72*	
		For Hot Dipped Galvanized, Add	*118.68*	
06 05 23 00-0086	EA	5-1/8" Beam, 6" Post, 3 Gauge, Gray Paint End Column Cap With Bolts (Simpson Strong Tie® ECC5 1/4-6)	297.29	
		For >10 To 50, Deduct	*-1.68*	
		For >50 To 100, Deduct	*-9.95*	
		For >100 To 250, Deduct	*-19.90*	
		For >250 To 500, Deduct	*-31.53*	
		For >500, Deduct	*-43.15*	
		For Hot Dipped Galvanized, Add	*118.68*	
06 05 23 00-0087	EA	5-1/8" Beam, 8" Post, 3 Gauge, Gray Paint End Column Cap With Bolts (Simpson Strong Tie® ECC5 1/4-8)	297.29	
		For >10 To 50, Deduct	*-1.68*	
		For >50 To 100, Deduct	*-9.95*	
		For >100 To 250, Deduct	*-19.90*	
		For >250 To 500, Deduct	*-31.53*	
		For >500, Deduct	*-43.15*	
		For Hot Dipped Galvanized, Add	*118.68*	
06 05 23 00-0088	EA	8" Beam, 4" Post, 3 Gauge, Gray Paint End Column Cap With Bolts (Simpson Strong Tie® ECC84)	359.95	
		For >10 To 50, Deduct	*-1.54*	
		For >50 To 100, Deduct	*-11.30*	
		For >100 To 250, Deduct	*-22.60*	
		For >250 To 500, Deduct	*-35.44*	
		For >500, Deduct	*-48.28*	
		For Hot Dipped Galvanized, Add	*148.16*	
06 05 23 00-0089	EA	8" Beam, 6" Post, 3 Gauge, Gray Paint End Column Cap With Bolts (Simpson Strong Tie® ECC86)	362.81	
		For >10 To 50, Deduct	*-1.68*	
		For >50 To 100, Deduct	*-11.59*	
		For >100 To 250, Deduct	*-23.17*	
		For >250 To 500, Deduct	*-36.44*	
		For >500, Deduct	*-49.71*	
		For Hot Dipped Galvanized, Add	*148.16*	
06 05 23 00-0090	EA	8" Beam, 8" Post, 3 Gauge, Gray Paint End Column Cap With Bolts (Simpson Strong Tie® ECC88)	362.81	
		For >10 To 50, Deduct	*-1.68*	
		For >50 To 100, Deduct	*-11.59*	
		For >100 To 250, Deduct	*-23.17*	
		For >250 To 500, Deduct	*-36.44*	
		For >500, Deduct	*-49.71*	
		For Hot Dipped Galvanized, Add	*148.16*	

06 05 23 00-0091 Rafter Connectors *(06 05 23)*

06 05 23 00-0092	EA	Galvanized Rigid Rafter Connector, For 2" x 6" (Simpson Strong Tie® RR)	12.49	4.42
		For >10 To 50, Deduct	*-0.49*	
		For >50 To 100, Deduct	*-1.05*	
		For >100 To 250, Deduct	*-2.10*	
		For >250 To 500, Deduct	*-3.65*	
		For >500, Deduct	*-5.19*	

06 05 23 00-0093 Bolts And Fasteners *(06 05 23)*

06 05 23 00-0094 Carriage Bolts *(06 05 23 00-0093)*

Note: Includes drilling of holes in any material. Includes nut and washer.

06 05 23 00-0095 Zinc Plated Steel, Low Carbon/Grade 2, Carriage Bolts *(06 05 23 00-0094)*

06 05 23 00-0096	EA	1/4" Diameter x 2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Carriage Bolt	19.02	
		For >10 To 50, Deduct	*-0.93*	
		For >50 To 100, Deduct	*-1.87*	
		For >100 To 250, Deduct	*-3.74*	
		For >250 To 500, Deduct	*-6.53*	
		For >500, Deduct	*-9.33*	
06 05 23 00-0097	EA	1/4" Diameter x 4" Length, Zinc Plated Steel, Low Carbon/Grade 2, Carriage Bolt	19.22	
		For >10 To 50, Deduct	*-0.93*	
		For >50 To 100, Deduct	*-1.87*	
		For >100 To 250, Deduct	*-3.75*	
		For >250 To 500, Deduct	*-6.55*	
		For >500, Deduct	*-9.35*	
06 05 23 00-0098	EA	1/4" Diameter x 6" Length, Zinc Plated Steel, Low Carbon/Grade 2, Carriage Bolt	19.34	
		For >10 To 50, Deduct	*-0.93*	
		For >50 To 100, Deduct	*-1.88*	
		For >100 To 250, Deduct	*-3.75*	
		For >250 To 500, Deduct	*-6.55*	
		For >500, Deduct	*-9.36*	
06 05 23 00-0099	EA	1/4" Diameter x 8" Length, Zinc Plated Steel, Low Carbon/Grade 2, Carriage Bolt	22.56	
		For >10 To 50, Deduct	*-1.07*	
		For >50 To 100, Deduct	*-2.17*	
		For >100 To 250, Deduct	*-4.34*	
		For >250 To 500, Deduct	*-7.58*	
		For >500, Deduct	*-10.82*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 05 23 00-0100	EA	3/8" Diameter x 2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Carriage Bolt	20.98	
		For >10 To 50, Deduct	*-1.00*	
		For >50 To 100, Deduct	*-2.02*	
		For >100 To 250, Deduct	*-4.05*	
		For >250 To 500, Deduct	*-7.07*	
		For >500, Deduct	*-10.09*	
06 05 23 00-0101	EA	3/8" Diameter x 4" Length, Zinc Plated Steel, Low Carbon/Grade 2, Carriage Bolt	22.74	
		For >10 To 50, Deduct	*-1.07*	
		For >50 To 100, Deduct	*-2.18*	
		For >100 To 250, Deduct	*-4.35*	
		For >250 To 500, Deduct	*-7.60*	
		For >500, Deduct	*-10.84*	
06 05 23 00-0102	EA	3/8" Diameter x 6" Length, Zinc Plated Steel, Low Carbon/Grade 2, Carriage Bolt	23.06	
		For >10 To 50, Deduct	*-1.07*	
		For >50 To 100, Deduct	*-2.18*	
		For >100 To 250, Deduct	*-4.37*	
		For >250 To 500, Deduct	*-7.62*	
		For >500, Deduct	*-10.87*	
06 05 23 00-0103	EA	3/8" Diameter x 8" Length, Zinc Plated Steel, Low Carbon/Grade 2, Carriage Bolt	27.57	
		For >10 To 50, Deduct	*-1.29*	
		For >50 To 100, Deduct	*-2.62*	
		For >100 To 250, Deduct	*-5.23*	
		For >250 To 500, Deduct	*-9.14*	
		For >500, Deduct	*-13.04*	
06 05 23 00-0104	EA	3/8" Diameter x 10" Length, Zinc Plated Steel, Low Carbon/Grade 2, Carriage Bolt	29.97	
		For >10 To 50, Deduct	*-1.36*	
		For >50 To 100, Deduct	*-2.78*	
		For >100 To 250, Deduct	*-5.57*	
		For >250 To 500, Deduct	*-9.71*	
		For >500, Deduct	*-13.85*	
06 05 23 00-0105	EA	3/8" Diameter x 12" Length, Zinc Plated Steel, Low Carbon/Grade 2, Carriage Bolt	33.77	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-3.09*	
		For >100 To 250, Deduct	*-6.19*	
		For >250 To 500, Deduct	*-10.78*	
		For >500, Deduct	*-15.37*	
06 05 23 00-0106	EA	1/2" Diameter x 2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Carriage Bolt	23.42	
		For >10 To 50, Deduct	*-1.07*	
		For >50 To 100, Deduct	*-2.19*	
		For >100 To 250, Deduct	*-4.38*	
		For >250 To 500, Deduct	*-7.65*	
		For >500, Deduct	*-10.91*	
06 05 23 00-0107	EA	1/2" Diameter x 4" Length, Zinc Plated Steel, Low Carbon/Grade 2, Carriage Bolt	25.68	
		For >10 To 50, Deduct	*-1.14*	
		For >50 To 100, Deduct	*-2.36*	
		For >100 To 250, Deduct	*-4.71*	
		For >250 To 500, Deduct	*-8.21*	
		For >500, Deduct	*-11.71*	
06 05 23 00-0108	EA	1/2" Diameter x 6" Length, Zinc Plated Steel, Low Carbon/Grade 2, Carriage Bolt	27.37	
		For >10 To 50, Deduct	*-1.21*	
		For >50 To 100, Deduct	*-2.50*	
		For >100 To 250, Deduct	*-5.01*	
		For >250 To 500, Deduct	*-8.73*	
		For >500, Deduct	*-12.45*	
06 05 23 00-0109	EA	1/2" Diameter x 8" Length, Zinc Plated Steel, Low Carbon/Grade 2, Carriage Bolt	30.69	
		For >10 To 50, Deduct	*-1.36*	
		For >50 To 100, Deduct	*-2.80*	
		For >100 To 250, Deduct	*-5.60*	
		For >250 To 500, Deduct	*-9.76*	
		For >500, Deduct	*-13.92*	
06 05 23 00-0110	EA	1/2" Diameter x 10" Length, Zinc Plated Steel, Low Carbon/Grade 2, Carriage Bolt	36.08	
		For >10 To 50, Deduct	*-1.57*	
		For >50 To 100, Deduct	*-3.26*	
		For >100 To 250, Deduct	*-6.52*	
		For >250 To 500, Deduct	*-11.34*	
		For >500, Deduct	*-16.17*	
06 05 23 00-0111	EA	1/2" Diameter x 12" Length, Zinc Plated Steel, Low Carbon/Grade 2, Carriage Bolt	40.45	
		For >10 To 50, Deduct	*-1.71*	
		For >50 To 100, Deduct	*-3.58*	
		For >100 To 250, Deduct	*-7.16*	
		For >250 To 500, Deduct	*-12.46*	
		For >500, Deduct	*-17.75*	
06 05 23 00-0112	EA	3/4" Diameter x 2" Length, Zinc Plated Steel, Low Carbon/Grade 2, Carriage Bolt	32.07	
		For >10 To 50, Deduct	*-1.29*	
		For >50 To 100, Deduct	*-2.73*	
		For >100 To 250, Deduct	*-5.46*	
		For >250 To 500, Deduct	*-9.47*	
		For >500, Deduct	*-13.49*	
06 05 23 00-0113	EA	3/4" Diameter x 4" Length, Zinc Plated Steel, Low Carbon/Grade 2, Carriage Bolt	34.79	
		For >10 To 50, Deduct	*-1.36*	
		For >50 To 100, Deduct	*-2.90*	
		For >100 To 250, Deduct	*-5.81*	
		For >250 To 500, Deduct	*-10.07*	
		For >500, Deduct	*-14.33*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 05 23 00-0114	EA	3/4" Diameter x 6" Length, Zinc Plated Steel, Low Carbon/Grade 2, Carriage Bolt	41.71	
		For >10 To 50, Deduct	*-1.57*	
		For >50 To 100, Deduct	*-3.40*	
		For >100 To 250, Deduct	*-6.80*	
		For >250 To 500, Deduct	*-11.77*	
		For >500, Deduct	*-16.74*	
06 05 23 00-0115	EA	3/4" Diameter x 8" Length, Zinc Plated Steel, Low Carbon/Grade 2, Carriage Bolt	46.95	
		For >10 To 50, Deduct	*-1.64*	
		For >50 To 100, Deduct	*-3.64*	
		For >100 To 250, Deduct	*-7.28*	
		For >250 To 500, Deduct	*-12.56*	
		For >500, Deduct	*-17.84*	
06 05 23 00-0116	EA	3/4" Diameter x 10" Length, Zinc Plated Steel, Low Carbon/Grade 2, Carriage Bolt	50.98	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-3.95*	
		For >100 To 250, Deduct	*-7.90*	
		For >250 To 500, Deduct	*-13.64*	
		For >500, Deduct	*-19.38*	
06 05 23 00-0117	EA	3/4" Diameter x 12" Length, Zinc Plated Steel, Low Carbon/Grade 2, Carriage Bolt	51.97	
		For >10 To 50, Deduct	*-1.86*	
		For >50 To 100, Deduct	*-4.08*	
		For >100 To 250, Deduct	*-8.17*	
		For >250 To 500, Deduct	*-14.11*	
		For >500, Deduct	*-20.05*	

06 05 23 00-0118 Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Carriage Bolts *(06 05 23 00-0094)*

06 05 23 00-0119	EA	1/4" Diameter x 2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Carriage Bolt	19.38	
		For >10 To 50, Deduct	*-0.93*	
		For >50 To 100, Deduct	*-1.88*	
		For >100 To 250, Deduct	*-3.75*	
		For >250 To 500, Deduct	*-6.56*	
		For >500, Deduct	*-9.36*	
06 05 23 00-0120	EA	1/4" Diameter x 4" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Carriage Bolt	19.75	
		For >10 To 50, Deduct	*-0.93*	
		For >50 To 100, Deduct	*-1.89*	
		For >100 To 250, Deduct	*-3.77*	
		For >250 To 500, Deduct	*-6.59*	
		For >500, Deduct	*-9.40*	
06 05 23 00-0121	EA	1/4" Diameter x 6" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Carriage Bolt	20.16	
		For >10 To 50, Deduct	*-0.93*	
		For >50 To 100, Deduct	*-1.90*	
		For >100 To 250, Deduct	*-3.79*	
		For >250 To 500, Deduct	*-6.62*	
		For >500, Deduct	*-9.44*	
06 05 23 00-0122	EA	1/4" Diameter x 8" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Carriage Bolt	23.95	
		For >10 To 50, Deduct	*-1.07*	
		For >50 To 100, Deduct	*-2.21*	
		For >100 To 250, Deduct	*-4.41*	
		For >250 To 500, Deduct	*-7.69*	
		For >500, Deduct	*-10.96*	
06 05 23 00-0123	EA	3/8" Diameter x 2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Carriage Bolt	21.48	
		For >10 To 50, Deduct	*-1.00*	
		For >50 To 100, Deduct	*-2.04*	
		For >100 To 250, Deduct	*-4.07*	
		For >250 To 500, Deduct	*-7.11*	
		For >500, Deduct	*-10.14*	
06 05 23 00-0124	EA	3/8" Diameter x 4" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Carriage Bolt	23.52	
		For >10 To 50, Deduct	*-1.07*	
		For >50 To 100, Deduct	*-2.19*	
		For >100 To 250, Deduct	*-4.39*	
		For >250 To 500, Deduct	*-7.65*	
		For >500, Deduct	*-10.92*	
06 05 23 00-0125	EA	3/8" Diameter x 6" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Carriage Bolt	23.98	
		For >10 To 50, Deduct	*-1.07*	
		For >50 To 100, Deduct	*-2.21*	
		For >100 To 250, Deduct	*-4.41*	
		For >250 To 500, Deduct	*-7.69*	
		For >500, Deduct	*-10.97*	
06 05 23 00-0126	EA	3/8" Diameter x 8" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Carriage Bolt	28.97	
		For >10 To 50, Deduct	*-1.29*	
		For >50 To 100, Deduct	*-2.65*	
		For >100 To 250, Deduct	*-5.30*	
		For >250 To 500, Deduct	*-9.24*	
		For >500, Deduct	*-13.18*	
06 05 23 00-0127	EA	3/8" Diameter x 10" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Carriage Bolt	31.53	
		For >10 To 50, Deduct	*-1.36*	
		For >50 To 100, Deduct	*-2.82*	
		For >100 To 250, Deduct	*-5.65*	
		For >250 To 500, Deduct	*-9.83*	
		For >500, Deduct	*-14.01*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 05 23 00-0128	EA	3/8" Diameter x 12" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Carriage Bolt	35.23	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-3.13*	
		For >100 To 250, Deduct	*-6.26*	
		For >250 To 500, Deduct	*-10.89*	
		For >500, Deduct	*-15.52*	
06 05 23 00-0129	EA	1/2" Diameter x 2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Carriage Bolt	24.59	
		For >10 To 50, Deduct	*-1.07*	
		For >50 To 100, Deduct	*-2.22*	
		For >100 To 250, Deduct	*-4.44*	
		For >250 To 500, Deduct	*-7.73*	
		For >500, Deduct	*-11.03*	
06 05 23 00-0130	EA	1/2" Diameter x 4" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Carriage Bolt	26.61	
		For >10 To 50, Deduct	*-1.14*	
		For >50 To 100, Deduct	*-2.38*	
		For >100 To 250, Deduct	*-4.76*	
		For >250 To 500, Deduct	*-8.28*	
		For >500, Deduct	*-11.80*	
06 05 23 00-0131	EA	1/2" Diameter x 6" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Carriage Bolt	28.47	
		For >10 To 50, Deduct	*-1.21*	
		For >50 To 100, Deduct	*-2.53*	
		For >100 To 250, Deduct	*-5.06*	
		For >250 To 500, Deduct	*-8.81*	
		For >500, Deduct	*-12.56*	
06 05 23 00-0132	EA	1/2" Diameter x 8" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Carriage Bolt	32.27	
		For >10 To 50, Deduct	*-1.36*	
		For >50 To 100, Deduct	*-2.84*	
		For >100 To 250, Deduct	*-5.68*	
		For >250 To 500, Deduct	*-9.88*	
		For >500, Deduct	*-14.08*	
06 05 23 00-0133	EA	1/2" Diameter x 10" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Carriage Bolt	37.63	
		For >10 To 50, Deduct	*-1.57*	
		For >50 To 100, Deduct	*-3.30*	
		For >100 To 250, Deduct	*-6.59*	
		For >250 To 500, Deduct	*-11.46*	
		For >500, Deduct	*-16.33*	
06 05 23 00-0134	EA	1/2" Diameter x 12" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Carriage Bolt	41.64	
		For >10 To 50, Deduct	*-1.71*	
		For >50 To 100, Deduct	*-3.61*	
		For >100 To 250, Deduct	*-7.22*	
		For >250 To 500, Deduct	*-12.55*	
		For >500, Deduct	*-17.87*	
06 05 23 00-0135	EA	3/4" Diameter x 2" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Carriage Bolt	35.60	
		For >10 To 50, Deduct	*-1.29*	
		For >50 To 100, Deduct	*-2.82*	
		For >100 To 250, Deduct	*-5.64*	
		For >250 To 500, Deduct	*-9.74*	
		For >500, Deduct	*-13.84*	
06 05 23 00-0136	EA	3/4" Diameter x 4" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Carriage Bolt	37.25	
		For >10 To 50, Deduct	*-1.36*	
		For >50 To 100, Deduct	*-2.97*	
		For >100 To 250, Deduct	*-5.93*	
		For >250 To 500, Deduct	*-10.25*	
		For >500, Deduct	*-14.58*	
06 05 23 00-0137	EA	3/4" Diameter x 6" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Carriage Bolt	43.46	
		For >10 To 50, Deduct	*-1.57*	
		For >50 To 100, Deduct	*-3.44*	
		For >100 To 250, Deduct	*-6.88*	
		For >250 To 500, Deduct	*-11.90*	
		For >500, Deduct	*-16.91*	
06 05 23 00-0138	EA	3/4" Diameter x 8" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Carriage Bolt	46.82	
		For >10 To 50, Deduct	*-1.64*	
		For >50 To 100, Deduct	*-3.63*	
		For >100 To 250, Deduct	*-7.27*	
		For >250 To 500, Deduct	*-12.55*	
		For >500, Deduct	*-17.82*	
06 05 23 00-0139	EA	3/4" Diameter x 10" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Carriage Bolt	53.25	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-4.01*	
		For >100 To 250, Deduct	*-8.02*	
		For >250 To 500, Deduct	*-13.81*	
		For >500, Deduct	*-19.61*	
06 05 23 00-0140	EA	3/4" Diameter x 12" Length, Hot Dipped Galvanized Steel, Low Carbon/Grade 2, Carriage Bolt	56.71	
		For >10 To 50, Deduct	*-1.86*	
		For >50 To 100, Deduct	*-4.20*	
		For >100 To 250, Deduct	*-8.41*	
		For >250 To 500, Deduct	*-14.46*	
		For >500, Deduct	*-20.52*	

06 05 23 00-0141 304/18-8 Stainless Steel, Carriage Bolts *(06 05 23 00-0094)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 05 23 00-0142	EA	1/4" Diameter x 2" Length, 304/18-8 Stainless Steel, Carriage Bolt	20.47	
		For >10 To 50, Deduct	*-0.93*	
		For >50 To 100, Deduct	*-1.90*	
		For >100 To 250, Deduct	*-3.81*	
		For >250 To 500, Deduct	*-6.64*	
		For >500, Deduct	*-9.47*	
06 05 23 00-0143	EA	1/4" Diameter x 4" Length, 304/18-8 Stainless Steel, Carriage Bolt	22.56	
		For >10 To 50, Deduct	*-0.93*	
		For >50 To 100, Deduct	*-1.96*	
		For >100 To 250, Deduct	*-3.91*	
		For >250 To 500, Deduct	*-6.80*	
		For >500, Deduct	*-9.68*	
06 05 23 00-0144	EA	1/4" Diameter x 6" Length, 304/18-8 Stainless Steel, Carriage Bolt	23.93	
		For >10 To 50, Deduct	*-0.93*	
		For >50 To 100, Deduct	*-1.99*	
		For >100 To 250, Deduct	*-3.98*	
		For >250 To 500, Deduct	*-6.90*	
		For >500, Deduct	*-9.82*	
06 05 23 00-0145	EA	1/4" Diameter x 8" Length, 304/18-8 Stainless Steel, Carriage Bolt	41.52	
		For >10 To 50, Deduct	*-1.07*	
		For >50 To 100, Deduct	*-2.64*	
		For >100 To 250, Deduct	*-5.29*	
		For >250 To 500, Deduct	*-9.00*	
		For >500, Deduct	*-12.72*	
06 05 23 00-0146	EA	3/8" Diameter x 2" Length, 304/18-8 Stainless Steel, Carriage Bolt	23.84	
		For >10 To 50, Deduct	*-1.00*	
		For >50 To 100, Deduct	*-2.10*	
		For >100 To 250, Deduct	*-4.19*	
		For >250 To 500, Deduct	*-7.29*	
		For >500, Deduct	*-10.38*	
06 05 23 00-0147	EA	3/8" Diameter x 4" Length, 304/18-8 Stainless Steel, Carriage Bolt	28.30	
		For >10 To 50, Deduct	*-1.07*	
		For >50 To 100, Deduct	*-2.31*	
		For >100 To 250, Deduct	*-4.63*	
		For >250 To 500, Deduct	*-8.01*	
		For >500, Deduct	*-11.40*	
06 05 23 00-0148	EA	3/8" Diameter x 6" Length, 304/18-8 Stainless Steel, Carriage Bolt	28.96	
		For >10 To 50, Deduct	*-1.07*	
		For >50 To 100, Deduct	*-2.33*	
		For >100 To 250, Deduct	*-4.66*	
		For >250 To 500, Deduct	*-8.06*	
		For >500, Deduct	*-11.46*	
06 05 23 00-0149	EA	3/8" Diameter x 8" Length, 304/18-8 Stainless Steel, Carriage Bolt	55.06	
		For >10 To 50, Deduct	*-1.29*	
		For >50 To 100, Deduct	*-3.30*	
		For >100 To 250, Deduct	*-6.61*	
		For >250 To 500, Deduct	*-11.20*	
		For >500, Deduct	*-15.79*	
06 05 23 00-0150	EA	3/8" Diameter x 10" Length, 304/18-8 Stainless Steel, Carriage Bolt	67.38	
		For >10 To 50, Deduct	*-1.36*	
		For >50 To 100, Deduct	*-3.72*	
		For >100 To 250, Deduct	*-7.44*	
		For >250 To 500, Deduct	*-12.51*	
		For >500, Deduct	*-17.59*	
06 05 23 00-0151	EA	3/8" Diameter x 12" Length, 304/18-8 Stainless Steel, Carriage Bolt	75.52	
		For >10 To 50, Deduct	*-1.50*	
		For >50 To 100, Deduct	*-4.14*	
		For >100 To 250, Deduct	*-8.27*	
		For >250 To 500, Deduct	*-13.91*	
		For >500, Deduct	*-19.54*	
06 05 23 00-0152	EA	1/2" Diameter x 2" Length, 304/18-8 Stainless Steel, Carriage Bolt	30.74	
		For >10 To 50, Deduct	*-1.07*	
		For >50 To 100, Deduct	*-2.38*	
		For >100 To 250, Deduct	*-4.75*	
		For >250 To 500, Deduct	*-8.20*	
		For >500, Deduct	*-11.64*	
06 05 23 00-0153	EA	1/2" Diameter x 4" Length, 304/18-8 Stainless Steel, Carriage Bolt	35.09	
		For >10 To 50, Deduct	*-1.14*	
		For >50 To 100, Deduct	*-2.59*	
		For >100 To 250, Deduct	*-5.18*	
		For >250 To 500, Deduct	*-8.92*	
		For >500, Deduct	*-12.65*	
06 05 23 00-0154	EA	1/2" Diameter x 6" Length, 304/18-8 Stainless Steel, Carriage Bolt	42.86	
		For >10 To 50, Deduct	*-1.21*	
		For >50 To 100, Deduct	*-2.89*	
		For >100 To 250, Deduct	*-5.78*	
		For >250 To 500, Deduct	*-9.89*	
		For >500, Deduct	*-13.99*	
06 05 23 00-0155	EA	1/2" Diameter x 8" Length, 304/18-8 Stainless Steel, Carriage Bolt	69.30	
		For >10 To 50, Deduct	*-1.36*	
		For >50 To 100, Deduct	*-3.77*	
		For >100 To 250, Deduct	*-7.53*	
		For >250 To 500, Deduct	*-12.66*	
		For >500, Deduct	*-17.78*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 05 23 00-0156	EA	1/2" Diameter x 10" Length, 304/18-8 Stainless Steel, Carriage Bolt	78.20	
		For >10 To 50, Deduct	*-1.57*	
		For >50 To 100, Deduct	*-4.31*	
		For >100 To 250, Deduct	*-8.62*	
		For >250 To 500, Deduct	*-14.50*	
		For >500, Deduct	*-20.38*	
06 05 23 00-0157	EA	1/2" Diameter x 12" Length, 304/18-8 Stainless Steel, Carriage Bolt	124.30	
		For >10 To 50, Deduct	*-1.71*	
		For >50 To 100, Deduct	*-5.68*	
		For >100 To 250, Deduct	*-11.36*	
		For >250 To 500, Deduct	*-18.75*	
		For >500, Deduct	*-26.14*	
06 05 23 00-0158	EA	3/4" Diameter x 4" Length, 304/18-8 Stainless Steel, Carriage Bolt	96.48	
		For >10 To 50, Deduct	*-1.36*	
		For >50 To 100, Deduct	*-4.45*	
		For >100 To 250, Deduct	*-8.89*	
		For >250 To 500, Deduct	*-14.70*	
		For >500, Deduct	*-20.50*	
06 05 23 00-0159	EA	3/4" Diameter x 6" Length, 304/18-8 Stainless Steel, Carriage Bolt	137.31	
		For >10 To 50, Deduct	*-1.57*	
		For >50 To 100, Deduct	*-5.79*	
		For >100 To 250, Deduct	*-11.58*	
		For >250 To 500, Deduct	*-18.94*	
		For >500, Deduct	*-26.30*	
06 05 23 00-0160	EA	3/4" Diameter x 8" Length, 304/18-8 Stainless Steel, Carriage Bolt	152.37	
		For >10 To 50, Deduct	*-1.64*	
		For >50 To 100, Deduct	*-6.27*	
		For >100 To 250, Deduct	*-12.55*	
		For >250 To 500, Deduct	*-20.46*	
		For >500, Deduct	*-28.38*	
06 05 23 00-0161	EA	3/4" Diameter x 10" Length, 304/18-8 Stainless Steel, Carriage Bolt	226.18	
		For >10 To 50, Deduct	*-1.79*	
		For >50 To 100, Deduct	*-8.33*	
		For >100 To 250, Deduct	*-16.66*	
		For >250 To 500, Deduct	*-26.78*	
		For >500, Deduct	*-36.90*	
06 05 23 00-0162	EA	3/4" Diameter x 12" Length, 304/18-8 Stainless Steel, Carriage Bolt	237.96	
		For >10 To 50, Deduct	*-1.86*	
		For >50 To 100, Deduct	*-8.73*	
		For >100 To 250, Deduct	*-17.47*	
		For >250 To 500, Deduct	*-28.06*	
		For >500, Deduct	*-38.65*	

06 05 23 00-0163 316 Stainless Steel, Carriage Bolts *(06 05 23 00-0094)*

06 05 23 00-0164	EA	1/4" Diameter x 2" Length, 316 Stainless Steel, Carriage Bolt	30.13	
		For >10 To 50, Deduct	*-0.93*	
		For >50 To 100, Deduct	*-2.15*	
		For >100 To 250, Deduct	*-4.29*	
		For >250 To 500, Deduct	*-7.36*	
		For >500, Deduct	*-10.44*	
06 05 23 00-0165	EA	1/4" Diameter x 4" Length, 316 Stainless Steel, Carriage Bolt	33.80	
		For >10 To 50, Deduct	*-0.93*	
		For >50 To 100, Deduct	*-2.24*	
		For >100 To 250, Deduct	*-4.47*	
		For >250 To 500, Deduct	*-7.64*	
		For >500, Deduct	*-10.80*	
06 05 23 00-0166	EA	3/8" Diameter x 2" Length, 316 Stainless Steel, Carriage Bolt	36.48	
		For >10 To 50, Deduct	*-1.00*	
		For >50 To 100, Deduct	*-2.41*	
		For >100 To 250, Deduct	*-4.82*	
		For >250 To 500, Deduct	*-8.23*	
		For >500, Deduct	*-11.64*	
06 05 23 00-0167	EA	3/8" Diameter x 4" Length, 316 Stainless Steel, Carriage Bolt	43.01	
		For >10 To 50, Deduct	*-1.07*	
		For >50 To 100, Deduct	*-2.68*	
		For >100 To 250, Deduct	*-5.36*	
		For >250 To 500, Deduct	*-9.12*	
		For >500, Deduct	*-12.87*	
06 05 23 00-0168	EA	1/2" Diameter x 2" Length, 316 Stainless Steel, Carriage Bolt	59.35	
		For >10 To 50, Deduct	*-1.07*	
		For >50 To 100, Deduct	*-3.09*	
		For >100 To 250, Deduct	*-6.18*	
		For >250 To 500, Deduct	*-10.34*	
		For >500, Deduct	*-14.50*	
06 05 23 00-0169	EA	1/2" Diameter x 4" Length, 316 Stainless Steel, Carriage Bolt	64.74	
		For >10 To 50, Deduct	*-1.14*	
		For >50 To 100, Deduct	*-3.33*	
		For >100 To 250, Deduct	*-6.66*	
		For >250 To 500, Deduct	*-11.14*	
		For >500, Deduct	*-15.61*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 05 23 00-0170	EA	1/2" Diameter x 6" Length, 316 Stainless Steel, Carriage Bolt	69.81	
		For >10 To 50, Deduct	*-1.21*	
		For >50 To 100, Deduct	*-3.57*	
		For >100 To 250, Deduct	*-7.13*	
		For >250 To 500, Deduct	*-11.91*	
		For >500, Deduct	*-16.69*	

06 05 23 00-0171 Hex Lag Bolts *(06 05 23 00-0093)*

Note: Includes drilling of holes in any material.

06 05 23 00-0172 Zinc Plated Steel, Hex Lag Bolts *(06 05 23 00-0171)*

06 05 23 00-0173	EA	1/4" Diameter x 2" Length, Zinc Plated Steel, Hex Lag Bolt	18.13	
		For >10 To 50, Deduct	*-0.89*	
		For >50 To 100, Deduct	*-1.79*	
		For >100 To 250, Deduct	*-3.58*	
		For >250 To 500, Deduct	*-6.27*	
		For >500, Deduct	*-8.95*	
06 05 23 00-0174	EA	1/4" Diameter x 4" Length, Zinc Plated Steel, Hex Lag Bolt	18.30	
		For >10 To 50, Deduct	*-0.89*	
		For >50 To 100, Deduct	*-1.80*	
		For >100 To 250, Deduct	*-3.59*	
		For >250 To 500, Deduct	*-6.28*	
		For >500, Deduct	*-8.97*	
06 05 23 00-0175	EA	1/4" Diameter x 6" Length, Zinc Plated Steel, Hex Lag Bolt	18.66	
		For >10 To 50, Deduct	*-0.89*	
		For >50 To 100, Deduct	*-1.81*	
		For >100 To 250, Deduct	*-3.61*	
		For >250 To 500, Deduct	*-6.31*	
		For >500, Deduct	*-9.01*	
06 05 23 00-0176	EA	3/8" Diameter x 2" Length, Zinc Plated Steel, Hex Lag Bolt	19.98	
		For >10 To 50, Deduct	*-0.97*	
		For >50 To 100, Deduct	*-1.96*	
		For >100 To 250, Deduct	*-3.92*	
		For >250 To 500, Deduct	*-6.85*	
		For >500, Deduct	*-9.78*	
06 05 23 00-0177	EA	3/8" Diameter x 4" Length, Zinc Plated Steel, Hex Lag Bolt	21.71	
		For >10 To 50, Deduct	*-1.04*	
		For >50 To 100, Deduct	*-2.11*	
		For >100 To 250, Deduct	*-4.21*	
		For >250 To 500, Deduct	*-7.36*	
		For >500, Deduct	*-10.51*	
06 05 23 00-0178	EA	3/8" Diameter x 6" Length, Zinc Plated Steel, Hex Lag Bolt	22.10	
		For >10 To 50, Deduct	*-1.04*	
		For >50 To 100, Deduct	*-2.12*	
		For >100 To 250, Deduct	*-4.23*	
		For >250 To 500, Deduct	*-7.39*	
		For >500, Deduct	*-10.55*	
06 05 23 00-0179	EA	3/8" Diameter x 8" Length, Zinc Plated Steel, Hex Lag Bolt	27.06	
		For >10 To 50, Deduct	*-1.25*	
		For >50 To 100, Deduct	*-2.55*	
		For >100 To 250, Deduct	*-5.10*	
		For >250 To 500, Deduct	*-8.91*	
		For >500, Deduct	*-12.71*	
06 05 23 00-0180	EA	3/8" Diameter x 10" Length, Zinc Plated Steel, Hex Lag Bolt	28.67	
		For >10 To 50, Deduct	*-1.32*	
		For >50 To 100, Deduct	*-2.70*	
		For >100 To 250, Deduct	*-5.39*	
		For >250 To 500, Deduct	*-9.41*	
		For >500, Deduct	*-13.42*	
06 05 23 00-0181	EA	1/2" Diameter x 2" Length, Zinc Plated Steel, Hex Lag Bolt	22.12	
		For >10 To 50, Deduct	*-1.05*	
		For >50 To 100, Deduct	*-2.13*	
		For >100 To 250, Deduct	*-4.26*	
		For >250 To 500, Deduct	*-7.43*	
		For >500, Deduct	*-10.61*	
06 05 23 00-0182	EA	1/2" Diameter x 4" Length, Zinc Plated Steel, Hex Lag Bolt	24.07	
		For >10 To 50, Deduct	*-1.12*	
		For >50 To 100, Deduct	*-2.28*	
		For >100 To 250, Deduct	*-4.56*	
		For >250 To 500, Deduct	*-7.96*	
		For >500, Deduct	*-11.36*	
06 05 23 00-0183	EA	1/2" Diameter x 6" Length, Zinc Plated Steel, Hex Lag Bolt	26.20	
		For >10 To 50, Deduct	*-1.19*	
		For >50 To 100, Deduct	*-2.44*	
		For >100 To 250, Deduct	*-4.88*	
		For >250 To 500, Deduct	*-8.51*	
		For >500, Deduct	*-12.14*	
06 05 23 00-0184	EA	1/2" Diameter x 8" Length, Zinc Plated Steel, Hex Lag Bolt	29.83	
		For >10 To 50, Deduct	*-1.33*	
		For >50 To 100, Deduct	*-2.74*	
		For >100 To 250, Deduct	*-5.48*	
		For >250 To 500, Deduct	*-9.55*	
		For >500, Deduct	*-13.62*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 05 23 00-0185	EA	1/2" Diameter x 10" Length, Zinc Plated Steel, Hex Lag Bolt	35.15	
		For >10 To 50, Deduct	*-1.54*	
		For >50 To 100, Deduct	*-3.19*	
		For >100 To 250, Deduct	*-6.38*	
		For >250 To 500, Deduct	*-11.11*	
		For >500, Deduct	*-15.84*	
06 05 23 00-0186	EA	1/2" Diameter x 12" Length, Zinc Plated Steel, Hex Lag Bolt	38.36	
		For >10 To 50, Deduct	*-1.68*	
		For >50 To 100, Deduct	*-3.48*	
		For >100 To 250, Deduct	*-6.96*	
		For >250 To 500, Deduct	*-12.12*	
		For >500, Deduct	*-17.28*	
06 05 23 00-0187	EA	3/4" Diameter x 4" Length, Zinc Plated Steel, Hex Lag Bolt	32.18	
		For >10 To 50, Deduct	*-1.33*	
		For >50 To 100, Deduct	*-2.80*	
		For >100 To 250, Deduct	*-5.60*	
		For >250 To 500, Deduct	*-9.73*	
		For >500, Deduct	*-13.85*	
06 05 23 00-0188	EA	3/4" Diameter x 6" Length, Zinc Plated Steel, Hex Lag Bolt	38.42	
		For >10 To 50, Deduct	*-1.54*	
		For >50 To 100, Deduct	*-3.27*	
		For >100 To 250, Deduct	*-6.54*	
		For >250 To 500, Deduct	*-11.35*	
		For >500, Deduct	*-16.16*	
06 05 23 00-0189	EA	3/4" Diameter x 8" Length, Zinc Plated Steel, Hex Lag Bolt	42.50	
		For >10 To 50, Deduct	*-1.61*	
		For >50 To 100, Deduct	*-3.48*	
		For >100 To 250, Deduct	*-6.95*	
		For >250 To 500, Deduct	*-12.04*	
		For >500, Deduct	*-17.13*	
06 05 23 00-0190	EA	3/4" Diameter x 10" Length, Zinc Plated Steel, Hex Lag Bolt	47.76	
		For >10 To 50, Deduct	*-1.75*	
		For >50 To 100, Deduct	*-3.82*	
		For >100 To 250, Deduct	*-7.64*	
		For >250 To 500, Deduct	*-13.21*	
		For >500, Deduct	*-18.78*	
06 05 23 00-0191	EA	3/4" Diameter x 12" Length, Zinc Plated Steel, Hex Lag Bolt	53.47	
		For >10 To 50, Deduct	*-1.82*	
		For >50 To 100, Deduct	*-4.07*	
		For >100 To 250, Deduct	*-8.13*	
		For >250 To 500, Deduct	*-14.02*	
		For >500, Deduct	*-19.90*	

06 05 23 00-0192 Hot Dipped Galvanized Steel, Hex Lag Bolts *(06 05 23 00-0171)*

06 05 23 00-0193	EA	1/4" Diameter x 2" Length, Hot Dipped Galvanized Steel, Hex Lag Bolt	18.21	
		For >10 To 50, Deduct	*-0.89*	
		For >50 To 100, Deduct	*-1.79*	
		For >100 To 250, Deduct	*-3.59*	
		For >250 To 500, Deduct	*-6.27*	
		For >500, Deduct	*-8.96*	
06 05 23 00-0194	EA	1/4" Diameter x 4" Length, Hot Dipped Galvanized Steel, Hex Lag Bolt	18.48	
		For >10 To 50, Deduct	*-0.89*	
		For >50 To 100, Deduct	*-1.80*	
		For >100 To 250, Deduct	*-3.60*	
		For >250 To 500, Deduct	*-6.29*	
		For >500, Deduct	*-8.99*	
06 05 23 00-0195	EA	1/4" Diameter x 6" Length, Hot Dipped Galvanized Steel, Hex Lag Bolt	18.75	
		For >10 To 50, Deduct	*-0.89*	
		For >50 To 100, Deduct	*-1.81*	
		For >100 To 250, Deduct	*-3.62*	
		For >250 To 500, Deduct	*-6.32*	
		For >500, Deduct	*-9.02*	
06 05 23 00-0196	EA	3/8" Diameter x 2" Length, Hot Dipped Galvanized Steel, Hex Lag Bolt	20.13	
		For >10 To 50, Deduct	*-0.97*	
		For >50 To 100, Deduct	*-1.96*	
		For >100 To 250, Deduct	*-3.92*	
		For >250 To 500, Deduct	*-6.86*	
		For >500, Deduct	*-9.79*	
06 05 23 00-0197	EA	3/8" Diameter x 4" Length, Hot Dipped Galvanized Steel, Hex Lag Bolt	21.94	
		For >10 To 50, Deduct	*-1.04*	
		For >50 To 100, Deduct	*-2.11*	
		For >100 To 250, Deduct	*-4.22*	
		For >250 To 500, Deduct	*-7.38*	
		For >500, Deduct	*-10.53*	
06 05 23 00-0198	EA	3/8" Diameter x 6" Length, Hot Dipped Galvanized Steel, Hex Lag Bolt	22.38	
		For >10 To 50, Deduct	*-1.04*	
		For >50 To 100, Deduct	*-2.12*	
		For >100 To 250, Deduct	*-4.25*	
		For >250 To 500, Deduct	*-7.41*	
		For >500, Deduct	*-10.57*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 05 23 00-0199	EA	3/8" Diameter x 8" Length, Hot Dipped Galvanized Steel, Hex Lag Bolt	27.59	
		For >10 To 50, Deduct	*-1.25*	
		For >50 To 100, Deduct	*-2.57*	
		For >100 To 250, Deduct	*-5.13*	
		For >250 To 500, Deduct	*-8.95*	
		For >500, Deduct	*-12.76*	
06 05 23 00-0200	EA	3/8" Diameter x 10" Length, Hot Dipped Galvanized Steel, Hex Lag Bolt	29.55	
		For >10 To 50, Deduct	*-1.32*	
		For >50 To 100, Deduct	*-2.72*	
		For >100 To 250, Deduct	*-5.44*	
		For >250 To 500, Deduct	*-9.47*	
		For >500, Deduct	*-13.51*	
06 05 23 00-0201	EA	1/2" Diameter x 2" Length, Hot Dipped Galvanized Steel, Hex Lag Bolt	22.52	
		For >10 To 50, Deduct	*-1.05*	
		For >50 To 100, Deduct	*-2.14*	
		For >100 To 250, Deduct	*-4.28*	
		For >250 To 500, Deduct	*-7.46*	
		For >500, Deduct	*-10.65*	
06 05 23 00-0202	EA	1/2" Diameter x 4" Length, Hot Dipped Galvanized Steel, Hex Lag Bolt	24.29	
		For >10 To 50, Deduct	*-1.12*	
		For >50 To 100, Deduct	*-2.29*	
		For >100 To 250, Deduct	*-4.57*	
		For >250 To 500, Deduct	*-7.98*	
		For >500, Deduct	*-11.39*	
06 05 23 00-0203	EA	1/2" Diameter x 6" Length, Hot Dipped Galvanized Steel, Hex Lag Bolt	26.60	
		For >10 To 50, Deduct	*-1.19*	
		For >50 To 100, Deduct	*-2.45*	
		For >100 To 250, Deduct	*-4.90*	
		For >250 To 500, Deduct	*-8.54*	
		For >500, Deduct	*-12.18*	
06 05 23 00-0204	EA	1/2" Diameter x 8" Length, Hot Dipped Galvanized Steel, Hex Lag Bolt	31.02	
		For >10 To 50, Deduct	*-1.33*	
		For >50 To 100, Deduct	*-2.77*	
		For >100 To 250, Deduct	*-5.54*	
		For >250 To 500, Deduct	*-9.64*	
		For >500, Deduct	*-13.74*	
06 05 23 00-0205	EA	1/2" Diameter x 10" Length, Hot Dipped Galvanized Steel, Hex Lag Bolt	35.73	
		For >10 To 50, Deduct	*-1.54*	
		For >50 To 100, Deduct	*-3.20*	
		For >100 To 250, Deduct	*-6.41*	
		For >250 To 500, Deduct	*-11.15*	
		For >500, Deduct	*-15.89*	
06 05 23 00-0206	EA	1/2" Diameter x 12" Length, Hot Dipped Galvanized Steel, Hex Lag Bolt	39.79	
		For >10 To 50, Deduct	*-1.68*	
		For >50 To 100, Deduct	*-3.51*	
		For >100 To 250, Deduct	*-7.03*	
		For >250 To 500, Deduct	*-12.22*	
		For >500, Deduct	*-17.42*	
06 05 23 00-0207	EA	3/4" Diameter x 4" Length, Hot Dipped Galvanized Steel, Hex Lag Bolt	33.06	
		For >10 To 50, Deduct	*-1.33*	
		For >50 To 100, Deduct	*-2.82*	
		For >100 To 250, Deduct	*-5.64*	
		For >250 To 500, Deduct	*-9.79*	
		For >500, Deduct	*-13.94*	
06 05 23 00-0208	EA	3/4" Diameter x 6" Length, Hot Dipped Galvanized Steel, Hex Lag Bolt	39.22	
		For >10 To 50, Deduct	*-1.54*	
		For >50 To 100, Deduct	*-3.29*	
		For >100 To 250, Deduct	*-6.58*	
		For >250 To 500, Deduct	*-11.41*	
		For >500, Deduct	*-16.24*	
06 05 23 00-0209	EA	3/4" Diameter x 8" Length, Hot Dipped Galvanized Steel, Hex Lag Bolt	43.83	
		For >10 To 50, Deduct	*-1.61*	
		For >50 To 100, Deduct	*-3.51*	
		For >100 To 250, Deduct	*-7.02*	
		For >250 To 500, Deduct	*-12.14*	
		For >500, Deduct	*-17.26*	
06 05 23 00-0210	EA	3/4" Diameter x 10" Length, Hot Dipped Galvanized Steel, Hex Lag Bolt	50.92	
		For >10 To 50, Deduct	*-1.75*	
		For >50 To 100, Deduct	*-3.90*	
		For >100 To 250, Deduct	*-7.80*	
		For >250 To 500, Deduct	*-13.44*	
		For >500, Deduct	*-19.09*	
06 05 23 00-0211	EA	3/4" Diameter x 12" Length, Hot Dipped Galvanized Steel, Hex Lag Bolt	56.85	
		For >10 To 50, Deduct	*-1.82*	
		For >50 To 100, Deduct	*-4.15*	
		For >100 To 250, Deduct	*-8.30*	
		For >250 To 500, Deduct	*-14.27*	
		For >500, Deduct	*-20.24*	

06 05 23 00-0212 304/18-8 Stainless Steel, Hex Lag Bolts *(06 05 23 00-0171)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 05 23 00-0213	EA	1/4" Diameter x 2" Length, 304/18-8 Stainless Steel, Hex Lag Bolt	19.16	
		For >10 To 50, Deduct	*-0.89*	
		For >50 To 100, Deduct	*-1.82*	
		For >100 To 250, Deduct	*-3.64*	
		For >250 To 500, Deduct	*-6.35*	
		For >500, Deduct	*-9.06*	
06 05 23 00-0214	EA	1/4" Diameter x 4" Length, 304/18-8 Stainless Steel, Hex Lag Bolt	20.15	
		For >10 To 50, Deduct	*-0.89*	
		For >50 To 100, Deduct	*-1.84*	
		For >100 To 250, Deduct	*-3.69*	
		For >250 To 500, Deduct	*-6.42*	
		For >500, Deduct	*-9.16*	
06 05 23 00-0215	EA	1/4" Diameter x 6" Length, 304/18-8 Stainless Steel, Hex Lag Bolt	22.81	
		For >10 To 50, Deduct	*-0.89*	
		For >50 To 100, Deduct	*-1.91*	
		For >100 To 250, Deduct	*-3.82*	
		For >250 To 500, Deduct	*-6.62*	
		For >500, Deduct	*-9.42*	
06 05 23 00-0216	EA	3/8" Diameter x 2" Length, 304/18-8 Stainless Steel, Hex Lag Bolt	22.81	
		For >10 To 50, Deduct	*-0.97*	
		For >50 To 100, Deduct	*-2.03*	
		For >100 To 250, Deduct	*-4.06*	
		For >250 To 500, Deduct	*-7.06*	
		For >500, Deduct	*-10.06*	
06 05 23 00-0217	EA	3/8" Diameter x 4" Length, 304/18-8 Stainless Steel, Hex Lag Bolt	25.69	
		For >10 To 50, Deduct	*-1.04*	
		For >50 To 100, Deduct	*-2.21*	
		For >100 To 250, Deduct	*-4.41*	
		For >250 To 500, Deduct	*-7.66*	
		For >500, Deduct	*-10.91*	
06 05 23 00-0218	EA	3/8" Diameter x 6" Length, 304/18-8 Stainless Steel, Hex Lag Bolt	27.39	
		For >10 To 50, Deduct	*-1.04*	
		For >50 To 100, Deduct	*-2.25*	
		For >100 To 250, Deduct	*-4.50*	
		For >250 To 500, Deduct	*-7.79*	
		For >500, Deduct	*-11.08*	
06 05 23 00-0219	EA	3/8" Diameter x 8" Length, 304/18-8 Stainless Steel, Hex Lag Bolt	55.27	
		For >10 To 50, Deduct	*-1.25*	
		For >50 To 100, Deduct	*-3.26*	
		For >100 To 250, Deduct	*-6.52*	
		For >250 To 500, Deduct	*-11.02*	
		For >500, Deduct	*-15.53*	
06 05 23 00-0220	EA	3/8" Diameter x 10" Length, 304/18-8 Stainless Steel, Hex Lag Bolt	77.41	
		For >10 To 50, Deduct	*-1.32*	
		For >50 To 100, Deduct	*-3.91*	
		For >100 To 250, Deduct	*-7.83*	
		For >250 To 500, Deduct	*-13.06*	
		For >500, Deduct	*-18.30*	
06 05 23 00-0221	EA	1/2" Diameter x 2" Length, 304/18-8 Stainless Steel, Hex Lag Bolt	27.60	
		For >10 To 50, Deduct	*-1.05*	
		For >50 To 100, Deduct	*-2.27*	
		For >100 To 250, Deduct	*-4.53*	
		For >250 To 500, Deduct	*-7.85*	
		For >500, Deduct	*-11.16*	
06 05 23 00-0222	EA	1/2" Diameter x 4" Length, 304/18-8 Stainless Steel, Hex Lag Bolt	32.55	
		For >10 To 50, Deduct	*-1.12*	
		For >50 To 100, Deduct	*-2.49*	
		For >100 To 250, Deduct	*-4.99*	
		For >250 To 500, Deduct	*-8.60*	
		For >500, Deduct	*-12.21*	
06 05 23 00-0223	EA	1/2" Diameter x 6" Length, 304/18-8 Stainless Steel, Hex Lag Bolt	40.10	
		For >10 To 50, Deduct	*-1.19*	
		For >50 To 100, Deduct	*-2.79*	
		For >100 To 250, Deduct	*-5.58*	
		For >250 To 500, Deduct	*-9.55*	
		For >500, Deduct	*-13.53*	
06 05 23 00-0224	EA	1/2" Diameter x 8" Length, 304/18-8 Stainless Steel, Hex Lag Bolt	82.42	
		For >10 To 50, Deduct	*-1.33*	
		For >50 To 100, Deduct	*-4.05*	
		For >100 To 250, Deduct	*-8.11*	
		For >250 To 500, Deduct	*-13.49*	
		For >500, Deduct	*-18.88*	
06 05 23 00-0225	EA	1/2" Diameter x 10" Length, 304/18-8 Stainless Steel, Hex Lag Bolt	112.04	
		For >10 To 50, Deduct	*-1.54*	
		For >50 To 100, Deduct	*-5.11*	
		For >100 To 250, Deduct	*-10.22*	
		For >250 To 500, Deduct	*-16.87*	
		For >500, Deduct	*-23.52*	
06 05 23 00-0226	EA	1/2" Diameter x 12" Length, 304/18-8 Stainless Steel, Hex Lag Bolt	130.81	
		For >10 To 50, Deduct	*-1.68*	
		For >50 To 100, Deduct	*-5.79*	
		For >100 To 250, Deduct	*-11.58*	
		For >250 To 500, Deduct	*-19.05*	
		For >500, Deduct	*-26.52*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 05 23 00-0227	EA	3/4" Diameter x 4" Length, 304/18-8 Stainless Steel, Hex Lag Bolt	121.21	
		For >10 To 50, Deduct	*-1.33*	
		For >50 To 100, Deduct	*-5.02*	
		For >100 To 250, Deduct	*-10.05*	
		For >250 To 500, Deduct	*-16.40*	
		For >500, Deduct	*-22.76*	
06 05 23 00-0228	EA	3/4" Diameter x 6" Length, 304/18-8 Stainless Steel, Hex Lag Bolt	138.57	
		For >10 To 50, Deduct	*-1.54*	
		For >50 To 100, Deduct	*-5.77*	
		For >100 To 250, Deduct	*-11.55*	
		For >250 To 500, Deduct	*-18.86*	
		For >500, Deduct	*-26.18*	
06 05 23 00-0229	EA	3/4" Diameter x 8" Length, 304/18-8 Stainless Steel, Hex Lag Bolt	144.19	
		For >10 To 50, Deduct	*-1.61*	
		For >50 To 100, Deduct	*-6.02*	
		For >100 To 250, Deduct	*-12.04*	
		For >250 To 500, Deduct	*-19.67*	
		For >500, Deduct	*-27.30*	
06 05 23 00-0230	EA	3/4" Diameter x 10" Length, 304/18-8 Stainless Steel, Hex Lag Bolt	199.53	
		For >10 To 50, Deduct	*-1.75*	
		For >50 To 100, Deduct	*-7.61*	
		For >100 To 250, Deduct	*-15.23*	
		For >250 To 500, Deduct	*-24.59*	
		For >500, Deduct	*-33.95*	
06 05 23 00-0231	EA	3/4" Diameter x 12" Length, 304/18-8 Stainless Steel, Hex Lag Bolt	217.66	
		For >10 To 50, Deduct	*-1.82*	
		For >50 To 100, Deduct	*-8.17*	
		For >100 To 250, Deduct	*-16.34*	
		For >250 To 500, Deduct	*-26.33*	
		For >500, Deduct	*-36.32*	

06 05 23 00-0232 Stainless Steel Screws *(06 05 23 00-0093)*

06 05 23 00-0233	EA	#8 x 1-1/2" Stainless Steel Screw	2.83	
06 05 23 00-0234	EA	#9 x 1-1/2" Stainless Steel Screw	2.88	
06 05 23 00-0235	EA	#10 x 1-1/2" Stainless Steel Screw	2.96	
06 05 23 00-0236	EA	#12 x 1-1/2" Stainless Steel Screw	3.18	

06 05 23 00-0237 Galvanized Steel Screws *(06 05 23 00-0093)*

06 05 23 00-0238	EA	#8 x 1-1/2" Galvanized Steel Screw	2.61	
06 05 23 00-0239	EA	#9 x 1-1/2" Galvanized Steel Screw	2.66	
06 05 23 00-0240	EA	#10 x 1-1/2" Galvanized Steel Screw	2.73	
06 05 23 00-0241	EA	#12 x 1-1/2" Galvanized Steel Screw	2.92	
06 05 23 00-0242	EA	#8 x 2-1/2" Galvanized Steel Screw	2.66	
06 05 23 00-0243	EA	#9 x 2-1/2" Galvanized Steel Screw	2.70	
06 05 23 00-0244	EA	#10 x 2-1/2" Galvanized Steel Screw	2.78	
06 05 23 00-0245	EA	#12 x 2-1/2" Galvanized Steel Screw	3.02	

06 05 23 00-0246 Timber Bolts *(06 05 23 00-0093)*

Note: Includes drilling of holes in any material.

06 05 23 00-0247	EA	5/8" - 11 x 4" Threaded x 8" OAL A153 Galvanized Timber Bolt (Fastenal #11103914)	44.26	
		For >10 To 50, Deduct	*-1.48*	
		For >50 To 100, Deduct	*-3.32*	
		For >100 To 250, Deduct	*-6.65*	
		For >250 To 500, Deduct	*-11.45*	
		For >500, Deduct	*-16.25*	
06 05 23 00-0248	EA	5/8" - 11 x 4" Threaded x 10" OAL A153 Galvanized Timber Bolt (Fastenal #11103915)	50.00	
		For >10 To 50, Deduct	*-1.65*	
		For >50 To 100, Deduct	*-3.73*	
		For >100 To 250, Deduct	*-7.46*	
		For >250 To 500, Deduct	*-12.85*	
		For >500, Deduct	*-18.23*	
06 05 23 00-0249	EA	5/8" - 11 x 6" Threaded x 12" OAL A153 Galvanized Timber Bolt (Fastenal #11103916)	54.00	
		For >10 To 50, Deduct	*-1.76*	
		For >50 To 100, Deduct	*-3.99*	
		For >100 To 250, Deduct	*-7.99*	
		For >250 To 500, Deduct	*-13.74*	
		For >500, Deduct	*-19.50*	
06 05 23 00-0250	EA	5/8" - 11 x 6" Threaded x 14" OAL A153 Galvanized Timber Bolt (Fastenal #11103917)	60.06	
		For >10 To 50, Deduct	*-1.86*	
		For >50 To 100, Deduct	*-4.29*	
		For >100 To 250, Deduct	*-8.59*	
		For >250 To 500, Deduct	*-14.75*	
		For >500, Deduct	*-20.90*	
06 05 23 00-0251	EA	5/8" - 11 x 6" Threaded x 16" OAL A153 Galvanized Timber Bolt (Fastenal #11103918)	63.91	
		For >10 To 50, Deduct	*-1.96*	
		For >50 To 100, Deduct	*-4.54*	
		For >100 To 250, Deduct	*-9.08*	
		For >250 To 500, Deduct	*-15.59*	
		For >500, Deduct	*-22.10*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 05 23 00-0252	EA	5/8" - 11 x 6" Threaded x 18" OAL A153 Galvanized Timber Bolt (Fastenal #11103919)	66.38	
		For >10 To 50, Deduct	*-2.05*	
		For >50 To 100, Deduct	*-4.73*	
		For >100 To 250, Deduct	*-9.47*	
		For >250 To 500, Deduct	*-16.25*	
		For >500, Deduct	*-23.03*	
06 05 23 00-0253	EA	3/4" - 11 x 4" Threaded x 10" OAL A153 Galvanized Timber Bolt (Fastenal #11103920)	59.47	
		For >10 To 50, Deduct	*-1.76*	
		For >50 To 100, Deduct	*-4.13*	
		For >100 To 250, Deduct	*-8.26*	
		For >250 To 500, Deduct	*-14.15*	
		For >500, Deduct	*-20.04*	
06 05 23 00-0254	EA	3/4" - 11 x 6" Threaded x 12" OAL A153 Galvanized Timber Bolt (Fastenal #11103921)	62.19	
		For >10 To 50, Deduct	*-1.83*	
		For >50 To 100, Deduct	*-4.31*	
		For >100 To 250, Deduct	*-8.61*	
		For >250 To 500, Deduct	*-14.75*	
		For >500, Deduct	*-20.89*	
06 05 23 00-0255	EA	3/4" - 11 x 6" Threaded x 14" OAL A153 Galvanized Timber Bolt (Fastenal #11103922)	68.79	
		For >10 To 50, Deduct	*-1.94*	
		For >50 To 100, Deduct	*-4.63*	
		For >100 To 250, Deduct	*-9.26*	
		For >250 To 500, Deduct	*-15.84*	
		For >500, Deduct	*-22.41*	
06 05 23 00-0256	EA	3/4" - 11 x 6" Threaded x 16" OAL A153 Galvanized Timber Bolt (Fastenal #11103923)	73.82	
		For >10 To 50, Deduct	*-2.04*	
		For >50 To 100, Deduct	*-4.91*	
		For >100 To 250, Deduct	*-9.82*	
		For >250 To 500, Deduct	*-16.77*	
		For >500, Deduct	*-23.72*	
06 05 23 00-0257	EA	3/4" - 11 x 6" Threaded x 18" OAL A153 Galvanized Timber Bolt (Fastenal #11103924)	79.28	
		For >10 To 50, Deduct	*-2.14*	
		For >50 To 100, Deduct	*-5.20*	
		For >100 To 250, Deduct	*-10.39*	
		For >250 To 500, Deduct	*-17.73*	
		For >500, Deduct	*-25.07*	

06 05 23 00-0258 Supports *(06 05 23)*

06 05 23 00-0259 Shear Plates *(06 05 23 00-0258)*

06 05 23 00-0260	EA	2-5/8" Diameter, Shear Plate	17.88	5.29
		For >10 To 50, Deduct	*-0.60*	
		For >50 To 100, Deduct	*-1.34*	
		For >100 To 250, Deduct	*-2.68*	
		For >250 To 500, Deduct	*-4.61*	
		For >500, Deduct	*-6.55*	
06 05 23 00-0261	EA	4" Diameter, Shear Plate	17.42	5.57
		For >10 To 50, Deduct	*-0.62*	
		For >50 To 100, Deduct	*-1.37*	
		For >100 To 250, Deduct	*-2.73*	
		For >250 To 500, Deduct	*-4.72*	
		For >500, Deduct	*-6.71*	

06 05 23 00-0262 Sill Anchors *(06 05 23 00-0258)*

06 05 23 00-0263	EA	Sill Anchor Embedded In Concrete	15.80	5.57
		For >10 To 50, Deduct	*-0.62*	
		For >50 To 100, Deduct	*-1.33*	
		For >100 To 250, Deduct	*-2.65*	
		For >250 To 500, Deduct	*-4.60*	
		For >500, Deduct	*-6.54*	

06 05 23 00-0264 Spike Grids *(06 05 23 00-0258)*

06 05 23 00-0265	EA	3" x 6" Flat Or Curved Spike Grid	14.28	5.29
		For >10 To 50, Deduct	*-0.60*	
		For >50 To 100, Deduct	*-1.25*	
		For >100 To 250, Deduct	*-2.50*	
		For >250 To 500, Deduct	*-4.34*	
		For >500, Deduct	*-6.19*	

06 05 23 00-0266 Split Rings *(06 05 23 00-0258)*

06 05 23 00-0267	EA	2-1/2" Diameter Split Ring	18.08	5.29
		For >10 To 50, Deduct	*-0.60*	
		For >50 To 100, Deduct	*-1.34*	
		For >100 To 250, Deduct	*-2.69*	
		For >250 To 500, Deduct	*-4.63*	
		For >500, Deduct	*-6.57*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 05 23 00-0268	EA	4" Diameter Split Ring	19.50	5.85
		For >10 To 50, Deduct	*-0.65*	
		For >50 To 100, Deduct	*-1.46*	
		For >100 To 250, Deduct	*-2.92*	
		For >250 To 500, Deduct	*-5.03*	
		For >500, Deduct	*-7.15*	
06 05 23 00-0269		**Toothed Rings** *(06 05 23 00-0258)*		
06 05 23 00-0270	EA	2-5/8" Or 4" Toothed Ring	14.99	5.29
		For >10 To 50, Deduct	*-0.60*	
		For >50 To 100, Deduct	*-1.27*	
		For >100 To 250, Deduct	*-2.53*	
		For >250 To 500, Deduct	*-4.40*	
		For >500, Deduct	*-6.26*	
06 05 23 00-0271		**Straps And Shields** *(06 05 23)*		
06 05 23 00-0272		**Shield Plate** *(06 05 23 00-0271)*		
06 05 23 00-0273	EA	5" Wide x 8" Long, 16 Gauge, Galvanized Shield Plate (Simpson Strong Tie® PSPN58Z)	10.74	
		For >10 To 50, Deduct	*-0.09*	
		For >50 To 100, Deduct	*-0.36*	
		For >100 To 250, Deduct	*-0.72*	
		For >250 To 500, Deduct	*-1.25*	
		For >500, Deduct	*-1.90*	
06 05 23 00-0274	EA	5" Wide x 16" Long, 16 Gauge, Galvanized Shield Plate (Simpson Strong Tie® PSPN516Z)	17.07	
		For >10 To 50, Deduct	*-0.11*	
		For >50 To 100, Deduct	*-0.53*	
		For >100 To 250, Deduct	*-1.07*	
		For >250 To 500, Deduct	*-1.82*	
		For >500, Deduct	*-2.69*	
06 05 23 00-0275		**Strap Ties** *(06 05 23 00-0271)*		
06 05 23 00-0276	EA	1-1/4" Wide x 9" Long, 20 Gauge, Galvanized Strap Tie (Simpson Strong Tie® LSTA9)	4.17	
		For >10 To 50, Deduct	*-0.07*	
		For >50 To 100, Deduct	*-0.18*	
		For >100 To 250, Deduct	*-0.35*	
		For >250 To 500, Deduct	*-0.67*	
		For >500, Deduct	*-1.07*	
06 05 23 00-0277	EA	1-1/4" Wide x 12" Long, 20 Gauge, Galvanized Strap Tie (Simpson Strong Tie® LSTA12)	4.27	
		For >10 To 50, Deduct	*-0.07*	
		For >50 To 100, Deduct	*-0.18*	
		For >100 To 250, Deduct	*-0.36*	
		For >250 To 500, Deduct	*-0.68*	
		For >500, Deduct	*-1.08*	
06 05 23 00-0278	EA	1-1/4" Wide x 15" Long, 20 Gauge, Galvanized Strap Tie (Simpson Strong Tie® LSTA15)	5.45	
		For >10 To 50, Deduct	*-0.09*	
		For >50 To 100, Deduct	*-0.23*	
		For >100 To 250, Deduct	*-0.45*	
		For >250 To 500, Deduct	*-0.86*	
		For >500, Deduct	*-1.37*	
06 05 23 00-0279	EA	1-1/4" Wide x 18" Long, 20 Gauge, Galvanized Strap Tie (Simpson Strong Tie® LSTA18)	5.67	
		For >10 To 50, Deduct	*-0.09*	
		For >50 To 100, Deduct	*-0.23*	
		For >100 To 250, Deduct	*-0.46*	
		For >250 To 500, Deduct	*-0.87*	
		For >500, Deduct	*-1.39*	
06 05 23 00-0280	EA	1-1/4" Wide x 21" Long, 20 Gauge, Galvanized Strap Tie (Simpson Strong Tie® LSTA21)	5.88	
		For >10 To 50, Deduct	*-0.09*	
		For >50 To 100, Deduct	*-0.24*	
		For >100 To 250, Deduct	*-0.47*	
		For >250 To 500, Deduct	*-0.89*	
		For >500, Deduct	*-1.41*	
06 05 23 00-0281	EA	1-1/4" Wide x 24" Long, 20 Gauge, Galvanized Strap Tie (Simpson Strong Tie® LSTA24)	6.76	
		For >10 To 50, Deduct	*-0.11*	
		For >50 To 100, Deduct	*-0.28*	
		For >100 To 250, Deduct	*-0.55*	
		For >250 To 500, Deduct	*-1.04*	
		For >500, Deduct	*-1.66*	
06 05 23 00-0282	EA	1-1/4" Wide x 30" Long, 20 Gauge, Galvanized Strap Tie (Simpson Strong Tie® LSTA30)	8.75	
		For >10 To 50, Deduct	*-0.11*	
		For >50 To 100, Deduct	*-0.33*	
		For >100 To 250, Deduct	*-0.65*	
		For >250 To 500, Deduct	*-1.19*	
		For >500, Deduct	*-1.86*	
06 05 23 00-0283	EA	1-1/4" Wide x 36" Long, 20 Gauge, Galvanized Strap Tie (Simpson Strong Tie® LSTA36)	10.15	
		For >10 To 50, Deduct	*-0.13*	
		For >50 To 100, Deduct	*-0.38*	
		For >100 To 250, Deduct	*-0.76*	
		For >250 To 500, Deduct	*-1.39*	
		For >500, Deduct	*-2.17*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 05 23 00-0284	EA	1-1/4" Wide x 9" Long, 18 Gauge, Galvanized Strap Tie (Simpson Strong Tie® MSTA9)	4.61	
		For >10 To 50, Deduct	*-0.07*	
		For >50 To 100, Deduct	*-0.19*	
		For >100 To 250, Deduct	*-0.37*	
		For >250 To 500, Deduct	*-0.70*	
		For >500, Deduct	*-1.12*	
06 05 23 00-0285	EA	1-1/4" Wide x 12" Long, 18 Gauge, Galvanized Strap Tie (Simpson Strong Tie® MSTA12)	4.78	
		For >10 To 50, Deduct	*-0.07*	
		For >50 To 100, Deduct	*-0.19*	
		For >100 To 250, Deduct	*-0.38*	
		For >250 To 500, Deduct	*-0.71*	
		For >500, Deduct	*-1.13*	
06 05 23 00-0286	EA	1-1/4" Wide x 15" Long, 18 Gauge, Galvanized Strap Tie (Simpson Strong Tie® MSTA15)	6.08	
		For >10 To 50, Deduct	*-0.09*	
		For >50 To 100, Deduct	*-0.24*	
		For >100 To 250, Deduct	*-0.48*	
		For >250 To 500, Deduct	*-0.90*	
		For >500, Deduct	*-1.43*	
06 05 23 00-0287	EA	1-1/4" Wide x 18" Long, 18 Gauge, Galvanized Strap Tie (Simpson Strong Tie® MSTA18)	6.34	
		For >10 To 50, Deduct	*-0.09*	
		For >50 To 100, Deduct	*-0.25*	
		For >100 To 250, Deduct	*-0.50*	
		For >250 To 500, Deduct	*-0.92*	
		For >500, Deduct	*-1.46*	
06 05 23 00-0288	EA	1-1/4" Wide x 21" Long, 18 Gauge, Galvanized Strap Tie (Simpson Strong Tie® MSTA21)	6.47	
		For >10 To 50, Deduct	*-0.09*	
		For >50 To 100, Deduct	*-0.25*	
		For >100 To 250, Deduct	*-0.50*	
		For >250 To 500, Deduct	*-0.93*	
		For >500, Deduct	*-1.47*	
06 05 23 00-0289	EA	1-1/4" Wide x 24" Long, 18 Gauge, Galvanized Strap Tie (Simpson Strong Tie® MSTA24)	7.39	
		For >10 To 50, Deduct	*-0.11*	
		For >50 To 100, Deduct	*-0.29*	
		For >100 To 250, Deduct	*-0.58*	
		For >250 To 500, Deduct	*-1.09*	
		For >500, Deduct	*-1.72*	
06 05 23 00-0290	EA	1-1/4" Wide x 30" Long, 18 Gauge, Galvanized Strap Tie (Simpson Strong Tie® MSTA30)	9.17	
		For >10 To 50, Deduct	*-0.11*	
		For >50 To 100, Deduct	*-0.34*	
		For >100 To 250, Deduct	*-0.67*	
		For >250 To 500, Deduct	*-1.22*	
		For >500, Deduct	*-1.90*	
06 05 23 00-0291	EA	1-1/4" Wide x 36" Long, 18 Gauge, Galvanized Strap Tie (Simpson Strong Tie® MSTA36)	10.16	
		For >10 To 50, Deduct	*-0.13*	
		For >50 To 100, Deduct	*-0.38*	
		For >100 To 250, Deduct	*-0.76*	
		For >250 To 500, Deduct	*-1.39*	
		For >500, Deduct	*-2.17*	
06 05 23 00-0292	EA	1-1/4" Wide x 36" Long, 18 Gauge, Galvanized Strap Tie (Simpson Strong Tie® MSTA49)	16.01	
		For >10 To 50, Deduct	*-0.14*	
		For >50 To 100, Deduct	*-0.54*	
		For >100 To 250, Deduct	*-1.09*	
		For >250 To 500, Deduct	*-1.91*	
		For >500, Deduct	*-2.91*	
06 05 23 00-0293	EA	1-1/4" Wide x 9" Long, 16 Gauge, Galvanized Strap Tie (Simpson Strong Tie® ST9)	5.44	
		For >10 To 50, Deduct	*-0.07*	
		For >50 To 100, Deduct	*-0.21*	
		For >100 To 250, Deduct	*-0.41*	
		For >250 To 500, Deduct	*-0.76*	
		For >500, Deduct	*-1.20*	
06 05 23 00-0294	EA	1-1/4" Wide x 12" Long, 16 Gauge, Galvanized Strap Tie (Simpson Strong Tie® ST12)	5.45	
		For >10 To 50, Deduct	*-0.07*	
		For >50 To 100, Deduct	*-0.21*	
		For >100 To 250, Deduct	*-0.42*	
		For >250 To 500, Deduct	*-0.77*	
		For >500, Deduct	*-1.20*	
06 05 23 00-0295	EA	1-1/4" Wide x 18" Long, 16 Gauge, Galvanized Strap Tie (Simpson Strong Tie® ST18)	6.63	
		For >10 To 50, Deduct	*-0.09*	
		For >50 To 100, Deduct	*-0.26*	
		For >100 To 250, Deduct	*-0.51*	
		For >250 To 500, Deduct	*-0.94*	
		For >500, Deduct	*-1.48*	
06 05 23 00-0296	EA	1-1/4" Wide x 22" Long, 16 Gauge, Galvanized Strap Tie (Simpson Strong Tie® ST22)	9.17	
		For >10 To 50, Deduct	*-0.11*	
		For >50 To 100, Deduct	*-0.34*	
		For >100 To 250, Deduct	*-0.67*	
		For >250 To 500, Deduct	*-1.22*	
		For >500, Deduct	*-1.90*	
06 05 23 00-0297	EA	1-3/8" Wide x 6" Long, 12 Gauge, Galvanized Strap Tie (Simpson Strong Tie® HRS6)	7.81	
		For >10 To 50, Deduct	*-0.07*	
		For >50 To 100, Deduct	*-0.27*	
		For >100 To 250, Deduct	*-0.53*	
		For >250 To 500, Deduct	*-0.94*	
		For >500, Deduct	*-1.44*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 05 23 00-0298	EA	1-3/8" Wide x 8" Long, 12 Gauge, Galvanized Strap Tie (Simpson Strong Tie® HRS8)	8.61	
		For >10 To 50, Deduct	*-0.07*	
		For >50 To 100, Deduct	*-0.29*	
		For >100 To 250, Deduct	*-0.57*	
		For >250 To 500, Deduct	*-1.00*	
		For >500, Deduct	*-1.52*	
06 05 23 00-0299	EA	1-3/8" Wide x 12" Long, 12 Gauge, Galvanized Strap Tie (Simpson Strong Tie® HRS12)	11.29	
		For >10 To 50, Deduct	*-0.09*	
		For >50 To 100, Deduct	*-0.37*	
		For >100 To 250, Deduct	*-0.74*	
		For >250 To 500, Deduct	*-1.29*	
		For >500, Deduct	*-1.95*	
06 05 23 00-0300	EA	2-1/16" Wide x 27" Long, 12 Gauge, Galvanized Medium Strap Tie (Simpson Strong Tie® MST27)	16.78	
		For >10 To 50, Deduct	*-0.11*	
		For >50 To 100, Deduct	*-0.53*	
		For >100 To 250, Deduct	*-1.05*	
		For >250 To 500, Deduct	*-1.79*	
		For >500, Deduct	*-2.66*	
06 05 23 00-0301	EA	2-1/16" Wide x 37" Long, 12 Gauge, Galvanized Medium Strap Tie (Simpson Strong Tie® MST37)	20.90	
		For >10 To 50, Deduct	*-0.13*	
		For >50 To 100, Deduct	*-0.65*	
		For >100 To 250, Deduct	*-1.30*	
		For >250 To 500, Deduct	*-2.19*	
		For >500, Deduct	*-3.24*	
06 05 23 00-0302	EA	2-1/16" Wide x 48" Long, 12 Gauge, Galvanized Medium Strap Tie (Simpson Strong Tie® MST48)	30.90	
		For >10 To 50, Deduct	*-0.14*	
		For >50 To 100, Deduct	*-0.92*	
		For >100 To 250, Deduct	*-1.83*	
		For >250 To 500, Deduct	*-3.03*	
		For >500, Deduct	*-4.40*	
06 05 23 00-0303	EA	2-1/16" Wide x 60" Long, 12 Gauge, Galvanized Medium Strap Tie (Simpson Strong Tie® MST60)	53.73	
		For >10 To 50, Deduct	*-0.16*	
		For >50 To 100, Deduct	*-1.50*	
		For >100 To 250, Deduct	*-3.01*	
		For >250 To 500, Deduct	*-4.83*	
		For >500, Deduct	*-6.85*	
06 05 23 00-0304	EA	2-1/16" Wide x 72" Long, 12 Gauge, Galvanized Medium Strap Tie (Simpson Strong Tie® MST72)	69.23	
		For >10 To 50, Deduct	*-0.18*	
		For >50 To 100, Deduct	*-1.91*	
		For >100 To 250, Deduct	*-3.82*	
		For >250 To 500, Deduct	*-6.08*	
		For >500, Deduct	*-8.57*	
06 05 23 00-0305	EA	3" Wide x 28-1/4" Long, 16 Gauge, Galvanized Strap Ties (Simpson Strong Tie® MSTC28)	20.00	
		For >10 To 50, Deduct	*-0.11*	
		For >50 To 100, Deduct	*-0.61*	
		For >100 To 250, Deduct	*-1.21*	
		For >250 To 500, Deduct	*-2.04*	
		For >500, Deduct	*-2.98*	
06 05 23 00-0306	EA	3" Wide x 40-1/4" Long, 16 Gauge, Galvanized Strap Ties (Simpson Strong Tie® MSTC40)	25.81	
		For >10 To 50, Deduct	*-0.13*	
		For >50 To 100, Deduct	*-0.77*	
		For >100 To 250, Deduct	*-1.54*	
		For >250 To 500, Deduct	*-2.56*	
		For >500, Deduct	*-3.73*	
06 05 23 00-0307	EA	3" Wide x 52-1/4" Long, 16 Gauge, Galvanized Strap Ties (Simpson Strong Tie® MSTC52)	30.13	
		For >10 To 50, Deduct	*-0.14*	
		For >50 To 100, Deduct	*-0.90*	
		For >100 To 250, Deduct	*-1.79*	
		For >250 To 500, Deduct	*-2.97*	
		For >500, Deduct	*-4.33*	
06 05 23 00-0308	EA	3" Wide x 66-1/4" Long, 16 Gauge, Galvanized Strap Ties (Simpson Strong Tie® MSTC66)	45.82	
		For >10 To 50, Deduct	*-0.16*	
		For >50 To 100, Deduct	*-1.31*	
		For >100 To 250, Deduct	*-2.61*	
		For >250 To 500, Deduct	*-4.24*	
		For >500, Deduct	*-6.06*	

06 05 23 00-0309 Twist Strap Ties *(06 05 23 00-0271)*

06 05 23 00-0310	EA	1-1/4" Wide x 12" Long, 18 Gauge, Galvanized Twist Strap Tie (Simpson Strong Tie® LTS12)	4.87	
		For >10 To 50, Deduct	*-0.07*	
		For >50 To 100, Deduct	*-0.19*	
		For >100 To 250, Deduct	*-0.39*	
		For >250 To 500, Deduct	*-0.72*	
		For >500, Deduct	*-1.14*	
06 05 23 00-0311	EA	1-1/4" Wide x 16" Long, 18 Gauge, Galvanized Twist Strap Tie (Simpson Strong Tie® LTS16)	6.12	
		For >10 To 50, Deduct	*-0.08*	
		For >50 To 100, Deduct	*-0.23*	
		For >100 To 250, Deduct	*-0.47*	
		For >250 To 500, Deduct	*-0.86*	
		For >500, Deduct	*-1.35*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 05 23 00-0312	EA	1-1/4" Wide x 18" Long, 18 Gauge, Galvanized Twist Strap Tie (Simpson Strong Tie® LTS18)	7.05	
		For >10 To 50, Deduct	*-0.09*	
		For >50 To 100, Deduct	*-0.27*	
		For >100 To 250, Deduct	*-0.53*	
		For >250 To 500, Deduct	*-0.98*	
		For >500, Deduct	*-1.53*	
06 05 23 00-0313	EA	1-1/4" Wide x 20" Long, 18 Gauge, Galvanized Twist Strap Tie (Simpson Strong Tie® LTS20)	7.64	
		For >10 To 50, Deduct	*-0.10*	
		For >50 To 100, Deduct	*-0.29*	
		For >100 To 250, Deduct	*-0.58*	
		For >250 To 500, Deduct	*-1.06*	
		For >500, Deduct	*-1.67*	
06 05 23 00-0314	EA	1-1/4" Wide x 12" Long, 16 Gauge, Galvanized Twist Strap Tie (Simpson Strong Tie® MTS12)	4.81	
		For >10 To 50, Deduct	*-0.07*	
		For >50 To 100, Deduct	*-0.19*	
		For >100 To 250, Deduct	*-0.38*	
		For >250 To 500, Deduct	*-0.72*	
		For >500, Deduct	*-1.14*	
06 05 23 00-0315	EA	1-1/4" Wide x 16" Long, 16 Gauge, Galvanized Twist Strap Tie (Simpson Strong Tie® MTS16)	6.22	
		For >10 To 50, Deduct	*-0.08*	
		For >50 To 100, Deduct	*-0.24*	
		For >100 To 250, Deduct	*-0.47*	
		For >250 To 500, Deduct	*-0.87*	
		For >500, Deduct	*-1.36*	
06 05 23 00-0316	EA	1-1/4" Wide x 18" Long, 16 Gauge, Galvanized Twist Strap Tie (Simpson Strong Tie® MTS18)	7.22	
		For >10 To 50, Deduct	*-0.09*	
		For >50 To 100, Deduct	*-0.27*	
		For >100 To 250, Deduct	*-0.54*	
		For >250 To 500, Deduct	*-0.99*	
		For >500, Deduct	*-1.54*	
06 05 23 00-0317	EA	1-1/4" Wide x 20" Long, 16 Gauge, Galvanized Twist Strap Tie (Simpson Strong Tie® MTS20)	7.70	
		For >10 To 50, Deduct	*-0.10*	
		For >50 To 100, Deduct	*-0.29*	
		For >100 To 250, Deduct	*-0.58*	
		For >250 To 500, Deduct	*-1.07*	
		For >500, Deduct	*-1.67*	
06 05 23 00-0318	EA	1-1/4" Wide x 24" Long, 16 Gauge, Galvanized Twist Strap Tie (Simpson Strong Tie® MTS24)	10.50	
		For >10 To 50, Deduct	*-0.11*	
		For >50 To 100, Deduct	*-0.37*	
		For >100 To 250, Deduct	*-0.74*	
		For >250 To 500, Deduct	*-1.32*	
		For >500, Deduct	*-2.03*	
06 05 23 00-0319	EA	1-1/4" Wide x 16" Long, 14 Gauge, Galvanized Twist Strap Tie (Simpson Strong Tie® HTS16)	8.03	
		For >10 To 50, Deduct	*-0.08*	
		For >50 To 100, Deduct	*-0.28*	
		For >100 To 250, Deduct	*-0.56*	
		For >250 To 500, Deduct	*-1.00*	
		For >500, Deduct	*-1.54*	
06 05 23 00-0320	EA	1-1/4" Wide x 20" Long, 14 Gauge, Galvanized Twist Strap Tie (Simpson Strong Tie® HTS20)	9.61	
		For >10 To 50, Deduct	*-0.10*	
		For >50 To 100, Deduct	*-0.34*	
		For >100 To 250, Deduct	*-0.68*	
		For >250 To 500, Deduct	*-1.21*	
		For >500, Deduct	*-1.86*	
06 05 23 00-0321	EA	1-1/4" Wide x 24" Long, 14 Gauge, Galvanized Twist Strap Tie (Simpson Strong Tie® HTS24)	11.16	
		For >10 To 50, Deduct	*-0.11*	
		For >50 To 100, Deduct	*-0.39*	
		For >100 To 250, Deduct	*-0.77*	
		For >250 To 500, Deduct	*-1.37*	
		For >500, Deduct	*-2.10*	

06 05 23 00-0322 Retrofit Plate Strap *(06 05 23 00-0271)*

06 05 23 00-0323	EA	1-3/8" Wide x 18-5/16" Long, 16 Gauge, Galvanized Retrofit Plate Strap (Simpson Strong Tie® RPS18)	8.04	
		For >10 To 50, Deduct	*-0.09*	
		For >50 To 100, Deduct	*-0.29*	
		For >100 To 250, Deduct	*-0.58*	
		For >250 To 500, Deduct	*-1.05*	
		For >500, Deduct	*-1.63*	
06 05 23 00-0324	EA	1-3/8" Wide x 22-5/16" Long, 16 Gauge, Galvanized Retrofit Plate Strap (Simpson Strong Tie® RPS22)	9.19	
		For >10 To 50, Deduct	*-0.09*	
		For >50 To 100, Deduct	*-0.32*	
		For >100 To 250, Deduct	*-0.64*	
		For >250 To 500, Deduct	*-1.14*	
		For >500, Deduct	*-1.74*	
06 05 23 00-0325	EA	1-3/8" Wide x 28-5/16" Long, 16 Gauge, Galvanized Retrofit Plate Strap (Simpson Strong Tie® RPS28)	11.02	
		For >10 To 50, Deduct	*-0.09*	
		For >50 To 100, Deduct	*-0.36*	
		For >100 To 250, Deduct	*-0.73*	
		For >250 To 500, Deduct	*-1.27*	
		For >500, Deduct	*-1.92*	

06 05 23 00-0326 Stud Shoe *(06 05 23 00-0271)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 05 23 00-0327	EA	6" High With 3-1/4" Wide Tabs For 2X Stud, 16 Gauge, Galvanized Stud Shoe (Simpson Strong Tie® SS1.5)	13.72	
		For >10 To 50, Deduct	*-0.11*	
		For >50 To 100, Deduct	*-0.45*	
		For >100 To 250, Deduct	*-0.90*	
		For >250 To 500, Deduct	*-1.56*	
		For >500, Deduct	*-2.36*	
06 05 23 00-0328	EA	6" High With 3-1/4" Wide Tabs For 3X Stud, 16 Gauge, Galvanized Stud Shoe (Simpson Strong Tie® SS2.5)	27.14	
		For >10 To 50, Deduct	*-0.11*	
		For >50 To 100, Deduct	*-0.79*	
		For >100 To 250, Deduct	*-1.57*	
		For >250 To 500, Deduct	*-2.57*	
		For >500, Deduct	*-3.70*	
06 05 23 00-0329	EA	6" High With 3-1/4" Wide Tabs For 2-2X Studs, 16 Gauge, Galvanized Stud Shoe (Simpson Strong Tie® SS3)	27.26	
		For >10 To 50, Deduct	*-0.11*	
		For >50 To 100, Deduct	*-0.79*	
		For >100 To 250, Deduct	*-1.58*	
		For >250 To 500, Deduct	*-2.58*	
		For >500, Deduct	*-3.71*	
06 05 23 00-0330	EA	6" High With 3-1/4" Wide Tabs For 3-2X Studs, 16 Gauge, Galvanized Stud Shoe (Simpson Strong Tie® SS4.5)	36.59	
		For >10 To 50, Deduct	*-0.11*	
		For >50 To 100, Deduct	*-1.02*	
		For >100 To 250, Deduct	*-2.04*	
		For >250 To 500, Deduct	*-3.28*	
		For >500, Deduct	*-4.64*	
06 05 23 00-0331	EA	7-1/8" High With 3-1/4" Wide Tabs For 2X Studs, 16 Gauge, Galvanized Stud Shoe (Simpson Strong Tie® HSS2-SDS1.5)	34.37	
		For >10 To 50, Deduct	*-0.11*	
		For >50 To 100, Deduct	*-0.97*	
		For >100 To 250, Deduct	*-1.93*	
		For >250 To 500, Deduct	*-3.11*	
		For >500, Deduct	*-4.42*	
06 05 23 00-0332	EA	7-1/8" High With 3-1/4" Wide Tabs For 2-2X Studs, 16 Gauge, Galvanized Stud Shoe (Simpson Strong Tie HSS2-2-SDS3)	37.25	
		For >10 To 50, Deduct	*-0.11*	
		For >50 To 100, Deduct	*-1.04*	
		For >100 To 250, Deduct	*-2.08*	
		For >250 To 500, Deduct	*-3.33*	
		For >500, Deduct	*-4.71*	
06 05 23 00-0333	EA	7-1/8" High With 3-1/4" Wide Tabs For 3-2X Studs, 16 Gauge, Galvanized Stud Shoe (Simpson Strong Tie® HSS2-3-SDS3)	39.44	
		For >10 To 50, Deduct	*-0.11*	
		For >50 To 100, Deduct	*-1.09*	
		For >100 To 250, Deduct	*-2.19*	
		For >250 To 500, Deduct	*-3.49*	
		For >500, Deduct	*-4.93*	
06 05 23 00-0334	EA	7-1/8" High With 3-1/4" Wide Tabs For 4X Studs, 16 Gauge, Galvanized Stud Shoe (Simpson Strong Tie® HSS4-SDS3)	59.68	
		For >10 To 50, Deduct	*-0.11*	
		For >50 To 100, Deduct	*-1.60*	
		For >100 To 250, Deduct	*-3.20*	
		For >250 To 500, Deduct	*-5.01*	
		For >500, Deduct	*-6.95*	

06 05 23 00-0335 Nail Stops *(06 05 23 00-0271)*

06 05 23 00-0336	EA	1-1/2" Wide x 3" Long, 16 Gauge, Galvanized Nail Stops (Simpson Strong Tie® NS1)	3.83	
		For >10 To 50, Deduct	*-0.07*	
		For >50 To 100, Deduct	*-0.17*	
		For >100 To 250, Deduct	*-0.33*	
		For >250 To 500, Deduct	*-0.64*	
		For >500, Deduct	*-1.04*	
06 05 23 00-0337	EA	1-1/2" Wide x 6" Long, 16 Gauge, Galvanized Nail Stops (Simpson Strong Tie® NS2)	4.01	
		For >10 To 50, Deduct	*-0.07*	
		For >50 To 100, Deduct	*-0.17*	
		For >100 To 250, Deduct	*-0.34*	
		For >250 To 500, Deduct	*-0.66*	
		For >500, Deduct	*-1.06*	

06 05 73 Wood Treatment *(06 05)*

06 05 73 13 Fire-Retardant Wood Treatment *(06 05 73)*

06 05 73 13-0001 Preservative Treated Lumber *(06 05 73 13)*

06 05 73 13-0002 Fire Retardant Treatment (FRT) For Lumber *(06 05 73 13-0001)*

06 05 73 13-0003	MBF	Fire Retardant Treatment (FRT) For Lumber	814.90	

06 05 73 33 Preservative Wood Treatment *(06 05 73)*

06 05 73 33-0001 Preservative Treatment For Marine And Fresh Water Uses *(06 05 73 33)*

06 05 73 33-0002	MBF	Preservative Treatment For Marine And Fresh Water Lumber	145.92	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

06 10 Rough Carpentry *(06)*

06 11 Wood Framing *(06 10)*

Note: All framing lumber is grade #2 or better unless otherwise listed. Dimensions are nominal. See CSI section 06 05 23 00-0000 for anchors and supports.

06 11 13 Engineered Wood Products *(06 11)*

Note: All framing lumber is grade #2 or better unless otherwise listed. Dimensions are nominal.

06 11 13 00-0001 Built-Up Members *(06 11 13)*

Note: A structural framing member made from fastening separate pieces of lumber together.

06 11 13 00-0002 Built-Up Beams Or Joists *(06 11 13 00-0001)*

06 11 13 00-0003	LF	Two 2" x 6" Built-up Wood Beam Or Joist	5.53	2.44
		For Each Additional 2" x_" In The Built Up Member, Add	*0.90*	
06 11 13 00-0004	LF	Two 2" x 8" Built-up Wood Beam Or Joist	6.85	2.88
		For Each Additional 2" x_" In The Built Up Member, Add	*1.27*	
06 11 13 00-0005	LF	Two 2" x 10" Built-up Wood Beam Or Joist	8.72	3.44
		For Each Additional 2" x_" In The Built Up Member, Add	*1.77*	

06 11 13 00-0006 Built-Up Posts *(06 11 13 00-0001)*

06 11 13 00-0007	LF	Two 2" x 6" Built-up Wood Post	5.53	2.44
		For Each Additional 2" x_" In The Built Up Member, Add	*0.90*	
06 11 13 00-0008	LF	Two 2" x 8" Built-up Wood Post	6.85	2.88
		For Each Additional 2" x_" In The Built Up Member, Add	*1.27*	
06 11 13 00-0009	LF	Two 2" x 10" Built-up Wood Post	8.72	3.44
		For Each Additional 2" x_" In The Built Up Member, Add	*1.77*	

06 11 16 Mechanically Graded Lumber *(06 11)*

06 11 16 00-0001 Rafters And Joists *(06 11 16)*

06 11 16 00-0002 Rafters *(06 11 16 00-0001)*

Note: An inclined roof framing member to which a roof covering is attached.

06 11 16 00-0003	LF	2" x 6" Wood Rafter	3.20	1.72
06 11 16 00-0004	LF	2" x 8" Wood Rafter	3.71	1.86
06 11 16 00-0005	LF	2" x 10" Wood Rafter	5.37	2.73
06 11 16 00-0006	LF	2" x 12" Wood Rafter	6.16	3.02
06 11 16 00-0007	LF	2" x 14" Wood Rafter	6.69	3.30
06 11 16 00-0008	LF	2" x 6" Pressure Treated Wood Rafter	3.17	1.72
06 11 16 00-0009	LF	2" x 8" Pressure Treated Wood Rafter	3.66	1.86
06 11 16 00-0010	LF	2" x 10" Pressure Treated Wood Rafter	5.11	2.73
06 11 16 00-0011	LF	2" x 12" Pressure Treated Wood Rafter	5.99	3.02

06 11 16 00-0012 Joists *(06 11 16 00-0001)*

Note: A series of parallel beams to support floors or ceilings.

06 11 16 00-0013	LF	2" x 6" Wood Floor Joist	2.76	1.44
06 11 16 00-0014	LF	2" x 8" Wood Floor Joist	3.43	1.58
06 11 16 00-0015	LF	2" x 10" Wood Floor Joist	4.35	2.02
06 11 16 00-0016	LF	2" x 12" Wood Floor Joist	5.16	2.30
06 11 16 00-0017	LF	2" x 14" Wood Floor Joist	5.68	2.44
06 11 16 00-0018	LF	2" x 6" Pressure Treated Wood Floor Joist	2.73	1.44
06 11 16 00-0019	LF	2" x 8" Pressure Treated Wood Floor Joist	3.38	1.58
06 11 16 00-0020	LF	2" x 10" Pressure Treated Wood Floor Joist	4.09	2.02
06 11 16 00-0021	LF	2" x 12" Pressure Treated Wood Floor Joist	4.99	2.30

06 11 16 00-0022 Purlins *(06 11 16 00-0001)*

Note: A horizontal structural member in a roof, supporting the loads from the roof deck or sheathing.

06 11 16 00-0023	LF	2" x 4" Wood Purlin	2.26	0.86
06 11 16 00-0024	LF	2" x 6" Wood Purlin	2.79	0.95
06 11 16 00-0025	LF	2" x 8" Wood Purlin	3.36	1.05
06 11 16 00-0026	LF	2" x 10" Wood Purlin	4.07	1.14
06 11 16 00-0027	LF	2" x 4" Pressure Treated Wood Purlin	2.24	0.86
06 11 16 00-0028	LF	2" x 6" Pressure Treated Wood Purlin	2.76	0.95
06 11 16 00-0029	LF	2" x 8" Pressure Treated Wood Purlin	3.31	1.05
06 11 16 00-0030	LF	2" x 10" Pressure Treated Wood Purlin	3.81	1.14

06 11 16 00-0031 Exposed Rafters Or Joists *(06 11 16 00-0001)*

06 11 16 00-0032 Redwood Rafters Or Joists *(06 11 16 00-0031)*

06 11 16 00-0033	LF	2" x 6" Redwood Rafter Or Joist	4.07	1.44
06 11 16 00-0034	LF	2" x 8" Redwood Rafter Or Joist	4.96	1.58
06 11 16 00-0035	LF	2" x 10" Redwood Rafter Or Joist	6.16	2.02
06 11 16 00-0036	LF	2" x 12" Redwood Rafter Or Joist	7.46	2.30

06 11 16 00-0037 Cedar Rafters Or Joists *(06 11 16 00-0031)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 11 16 00-0038	LF	2" x 6" Cedar Rafter Or Joist	2.77	1.44
06 11 16 00-0039	LF	2" x 8" Cedar Rafter Or Joist	3.13	1.58
06 11 16 00-0040	LF	2" x 10" Cedar Rafter Or Joist	3.60	2.02
06 11 16 00-0041	LF	2" x 12" Cedar Rafter Or Joist	4.10	2.30
06 11 16 00-0042		**Oak Rafters Or Joists** *(06 11 16 00-0031)*		
06 11 16 00-0043	LF	2" x 6" Oak Rafter Or Joist	3.30	1.44
06 11 16 00-0044	LF	2" x 8" Oak Rafter Or Joist	4.48	1.58
06 11 16 00-0045	LF	2" x 10" Oak Rafter Or Joist	5.78	2.02
06 11 16 00-0046	LF	2" x 12" Oak Rafter Or Joist	7.10	2.30
06 11 16 00-0047		**Framing** *(06 11 16)*		
06 11 16 00-0048		**Partition Framing** *(06 11 16 00-0047)*		
06 11 16 00-0049	LF	2" x 4" Wood Stud Framing, For Partition Walls	2.19	1.14
06 11 16 00-0050	LF	2" x 6" Wood Stud Framing, For Partition Walls	2.62	1.23
06 11 16 00-0051	LF	2" x 8" Wood Stud Framing, For Partition Walls	3.06	1.30
06 11 16 00-0052	LF	2" x 4" Pressure Treated Wood Stud Framing, For Partition Walls	2.17	1.14
06 11 16 00-0053	LF	2" x 6" Pressure Treated Wood Stud Framing, For Partition Walls	2.59	1.23
06 11 16 00-0054	LF	2" x 8" Pressure Treated Wood Stud Framing, For Partition Walls	3.01	1.30
06 11 16 00-0055		**Wall Framing Assemblies** *(06 11 16 00-0047)*		
		Note: Includes single bottom and double top plates, center support bracing, vertical studs and appropriate fastening devices. Excludes blocking for wall mounted fixtures or cabinets. Per SF of wall area measures one side. Do not deduct for openings of less than 25 SF when calculating total wall square footage.		
06 11 16 00-0056		**Wall Framing By The SF, 12" On Center** *(06 11 16 00-0055)*		
06 11 16 00-0057	SF	2" x 4" At 12" On Center, Wood Wall Framing Assembly	2.82	1.39
		For Up To 200, Add	*0.97*	
		For >200 To 500, Add	*0.49*	
06 11 16 00-0058	SF	2" x 6" At 12" On Center, Wood Wall Framing Assembly	3.78	1.78
		For Up To 200, Add	*1.28*	
		For >200 To 500, Add	*0.64*	
06 11 16 00-0059	SF	2" x 8" At 12" On Center, Wood Wall Framing Assembly	5.04	2.37
		For Up To 200, Add	*1.71*	
		For >200 To 500, Add	*0.85*	
06 11 16 00-0060		**Wall Framing By The SF, 16" On Center** *(06 11 16 00-0055)*		
06 11 16 00-0061	SF	2" x 4" At 16" On Center, Wood Wall Framing Assembly	2.29	1.12
		For Up To 200, Add	*0.79*	
		For >200 To 500, Add	*0.39*	
06 11 16 00-0062	SF	2" x 6" At 16" On Center, Wood Wall Framing Assembly	3.14	1.49
		For Up To 200, Add	*1.06*	
		For >200 To 500, Add	*0.53*	
06 11 16 00-0063	SF	2" x 8" At 16" On Center, Wood Wall Framing Assembly	4.20	1.97
		For Up To 200, Add	*1.42*	
		For >200 To 500, Add	*0.71*	
06 11 16 00-0064		**Wall Framing By The SF, 24" On Center** *(06 11 16 00-0055)*		
06 11 16 00-0065	SF	2" x 4" At 24" On Center, Wood Wall Framing Assembly	1.81	0.88
		For Up To 200, Add	*0.62*	
		For >200 To 500, Add	*0.31*	
06 11 16 00-0066	SF	2" x 6" At 24" On Center, Wood Wall Framing Assembly	2.46	1.15
		For Up To 200, Add	*0.83*	
		For >200 To 500, Add	*0.42*	
06 11 16 00-0067	SF	2" x 8" At 24" On Center, Wood Wall Framing Assembly	3.29	1.54
		For Up To 200, Add	*1.11*	
		For >200 To 500, Add	*0.56*	
06 11 16 00-0068		**Sills And Plates** *(06 11 16)*		
06 11 16 00-0069		**Sills** *(06 11 16 00-0068)*		
		Note: A horizontal member which rests on and is attached to the foundation.		
06 11 16 00-0070	LF	2" x 4" Wood Sill	3.77	2.16
06 11 16 00-0071	LF	2" x 6" Wood Sill	4.50	2.44
06 11 16 00-0072	LF	2" x 8" Wood Sill	5.32	2.73
06 11 16 00-0073	LF	2" x 4" Pressure Treated Wood Sill	3.75	2.16
06 11 16 00-0074	LF	2" x 6" Pressure Treated Wood Sill	4.47	2.44
06 11 16 00-0075	LF	2" x 8" Pressure Treated Wood Sill	5.27	2.73
06 11 16 00-0076		**Plates** *(06 11 16 00-0068)*		
		Note: A horizontal member connecting and terminating studs, posts, joists, rafters, etc. such as the top and bottom plate on a stud framed partition wall.		
06 11 16 00-0077	LF	2" x 4" Wood Plate	3.77	2.16
06 11 16 00-0078	LF	2" x 6" Wood Plate	4.50	2.44
06 11 16 00-0079	LF	2" x 8" Wood Plate	5.29	2.73

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 11 16 00-0080	LF	2" x 4" Pressure Treated Wood Plate	3.75	2.16
06 11 16 00-0081	LF	2" x 6" Pressure Treated Wood Plate	4.47	2.44
06 11 16 00-0082	LF	2" x 8" Pressure Treated Wood Plate	5.24	2.73
06 11 16 00-0083		Sills And Plates From Redwood *(06 11 16 00-0068)*		
06 11 16 00-0084		Construction Grade/Rough *(06 11 16 00-0083)*		
06 11 16 00-0085	LF	2" x 6" Redwood, Construction Grade/Rough	7.03	2.44
06 11 16 00-0086	LF	2" x 8" Redwood, Construction Grade/Rough	9.29	2.73
06 11 16 00-0087	LF	2" x 10" Redwood, Construction Grade/Rough	11.29	3.02
06 11 16 00-0088	LF	2" x 12" Redwood, Construction Grade/Rough	13.63	3.30
06 11 16 00-0089		Con Heart/Smooth *(06 11 16 00-0083)*		
06 11 16 00-0090	LF	2" x 6" Redwood, Con Heart/Smooth	8.50	2.44
06 11 16 00-0091	LF	2" x 8" Redwood, Con Heart/Smooth	11.49	2.73
06 11 16 00-0092	LF	2" x 10" Redwood, Con Heart/Smooth	15.01	3.02
06 11 16 00-0093	LF	2" x 12" Redwood, Con Heart/Smooth	18.05	3.30
06 11 16 00-0094		Suspended Ceiling Framing *(06 11 16)*		
06 11 16 00-0095	LF	1" x 2" Wood Suspended Ceiling Framing	3.12	1.86
06 11 16 00-0096	LF	1" x 3" Wood Suspended Ceiling Framing	3.39	2.02
06 11 16 00-0097	LF	1" x 4" Wood Suspended Ceiling Framing	3.55	2.16
06 11 16 00-0098	LF	2" x 2" Wood Suspended Ceiling Framing	3.65	2.16
06 11 16 00-0099	LF	2" x 4" Wood Suspended Ceiling Framing	4.33	2.44
06 11 16 00-0100	LF	1" x 2" Pressure Treated Wood Suspended Ceiling Framing	3.31	1.86
06 11 16 00-0101	LF	1" x 3" Pressure Treated Wood Suspended Ceiling Framing	3.40	2.02
06 11 16 00-0102	LF	1" x 4" Pressure Treated Wood Suspended Ceiling Framing	3.59	2.16
06 11 16 00-0103	LF	2" x 2" Pressure Treated Wood Suspended Ceiling Framing	3.63	2.16
06 11 16 00-0104	LF	2" x 4" Pressure Treated Wood Suspended Ceiling Framing	4.26	2.44
06 11 16 00-0105		Posts And Girts *(06 11 16)*		
06 11 16 00-0106		Posts *(06 11 16 00-0105)*		
		Note: A vertical, upright framing member.		
06 11 16 00-0107	LF	4" x 4" Wood Post	5.42	2.73
06 11 16 00-0108	LF	4" x 5" Wood Post	6.18	3.16
06 11 16 00-0109	LF	4" x 6" Wood Post	6.83	3.44
06 11 16 00-0110	LF	6" x 6" Wood Post	7.57	3.74
06 11 16 00-0111	LF	8" x 8" Wood Post	8.34	3.88
06 11 16 00-0112	LF	10" x 10" Wood Post	9.10	4.46
06 11 16 00-0113	LF	4" x 4" Pressure Treated Wood Post	6.06	2.73
06 11 16 00-0114	LF	3" x 6" Pressure Treated Wood Post	6.91	3.44
06 11 16 00-0115	LF	4" x 6" Pressure Treated Wood Post	8.26	3.44
06 11 16 00-0116	LF	6" x 6" Pressure Treated Wood Post	10.89	3.74
06 11 16 00-0117		Girts *(06 11 16 00-0105)*		
		Note: A horizontal member at intermediate level between columns, studs, or posts.		
06 11 16 00-0118	LF	2" x 4" Wood Girt	2.61	1.03
06 11 16 00-0119	LF	2" x 6" Wood Girt	3.17	1.13
06 11 16 00-0120	LF	2" x 8" Wood Girt	3.77	1.25
06 11 16 00-0121	LF	2" x 10" Wood Girt	4.52	1.38
06 11 16 00-0122	LF	4" x 4" Wood Girt	5.27	2.07
06 11 16 00-0123	LF	4" x 5" Wood Girt	6.04	2.33
06 11 16 00-0124	LF	4" x 6" Wood Girt	6.80	2.58
06 11 16 00-0125	LF	6" x 6" Wood Girt	7.55	2.85
06 11 16 00-0126	LF	8" x 8" Wood Girt	8.32	3.10
06 11 16 00-0127	LF	10" x 10" Wood Girt	9.08	3.37
06 11 16 00-0128	LF	2" x 4" Pressure Treated Wood Girt	2.59	1.03
06 11 16 00-0129	LF	2" x 6" Pressure Treated Wood Girt	3.14	1.13
06 11 16 00-0130	LF	2" x 8" Pressure Treated Wood Girt	3.72	1.25
06 11 16 00-0131	LF	2" x 10" Pressure Treated Wood Girt	4.26	1.38
06 11 16 00-0132	LF	4" x 4" Pressure Treated Wood Girt	6.06	2.07
06 11 16 00-0133	LF	3" x 6" Pressure Treated Wood Girt	6.91	2.58
06 11 16 00-0134	LF	4" x 6" Pressure Treated Wood Girt	8.26	2.58
06 11 16 00-0135	LF	6" x 6" Pressure Treated Wood Girt	10.89	2.85
06 11 16 00-0136		Construction Grade/Rough Redwood Posts *(06 11 16 00-0105)*		
06 11 16 00-0137	LF	4" x 4" Redwood, Construction Grade/Rough Post	10.76	2.73
		For Smooth "Clear", Add	*1.33*	
06 11 16 00-0138	LF	4" x 5" Redwood, Construction Grade/Rough Post	12.93	3.16
		For Smooth "Clear", Add	*1.66*	
06 11 16 00-0139	LF	4" x 6" Redwood, Construction Grade/Rough Post	15.14	3.44
		For Smooth "Clear", Add	*1.99*	
06 11 16 00-0140	LF	4" x 8" Redwood, Construction Grade/Rough Post	18.68	3.54
		For Smooth "Clear", Add	*2.66*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 11 16 00-0141	LF	4" x 10" Redwood, Construction Grade/Rough Post	22.32	3.78
		For Smooth "Clear", Add	*3.32*	
06 11 16 00-0142	LF	6" x 6" Redwood, Construction Grade/Rough Post	20.63	3.74
		For Smooth "Clear", Add	*2.99*	
06 11 16 00-0143	LF	6" x 8" Redwood, Construction Grade/Rough Post	25.83	3.88
		For Smooth "Clear", Add	*3.98*	
06 11 16 00-0144	LF	6" x 10" Redwood, Construction Grade/Rough Post	30.97	3.64
		For Smooth "Clear", Add	*4.98*	
06 11 16 00-0145	LF	8" x 8" Redwood, Construction Grade/Rough Post	32.78	3.88
		For Smooth "Clear", Add	*5.31*	
06 11 16 00-0146		**Stair Stringers** *(06 11 16)*		
06 11 16 00-0147	LF	2" x 10" Wood Stair Stringer	10.35	5.74
06 11 16 00-0148	LF	2" x 12" Wood Stair Stringer	12.23	6.76
06 11 16 00-0149	LF	2" x 10" Pressure Treated Wood Stair Stringer	10.13	5.74
06 11 16 00-0150	LF	2" x 12" Pressure Treated Wood Stair Stringer	12.03	6.76
06 11 16 00-0151		**Blocking And Sleepers** *(06 11 16)*		
06 11 16 00-0152		**Blocking** *(06 11 16 00-0151)*		
06 11 16 00-0153		**Blocking To Wood** *(06 11 16 00-0152)*		
06 11 16 00-0154	LF	2" x 4" Pressure Treated Wood Blocking To Wood	7.65	3.45
06 11 16 00-0155	LF	2" x 6" Pressure Treated Wood Blocking To Wood	8.85	3.80
06 11 16 00-0156	LF	2" x 8" Pressure Treated Wood Blocking To Wood	9.97	4.17
06 11 16 00-0157	LF	4" x 4" Pressure Treated Wood Blocking To Wood	11.37	4.59
06 11 16 00-0158	LF	4" x 6" Pressure Treated Wood Blocking To Wood	13.34	5.05
06 11 16 00-0159	LF	2" x 4" Wood Blocking To Wood	7.44	3.45
06 11 16 00-0160	LF	2" x 6" Wood Blocking To Wood	8.49	3.80
06 11 16 00-0161	LF	2" x 8" Wood Blocking To Wood	9.62	4.17
06 11 16 00-0162	LF	4" x 4" Wood Blocking To Wood	10.49	4.59
06 11 16 00-0163	LF	4" x 6" Wood Blocking To Wood	11.76	5.05
06 11 16 00-0164		**Blocking To Steel** *(06 11 16 00-0152)*		
06 11 16 00-0165	LF	2" x 4" Pressure Treated Wood Blocking To Steel	8.77	3.97
06 11 16 00-0166	LF	2" x 6" Pressure Treated Wood Blocking To Steel	10.11	4.37
06 11 16 00-0167	LF	2" x 8" Pressure Treated Wood Blocking To Steel	11.39	4.80
06 11 16 00-0168	LF	2" x 4" Wood Blocking To Steel	8.53	3.97
06 11 16 00-0169	LF	2" x 6" Wood Blocking To Steel	9.72	4.37
06 11 16 00-0170	LF	2" x 8" Wood Blocking To Steel	11.01	4.80
06 11 16 00-0171		**Blocking To Concrete** *(06 11 16 00-0152)*		
06 11 16 00-0172	LF	2" x 4" Pressure Treated Wood Blocking To Concrete	8.77	3.97
06 11 16 00-0173	LF	2" x 6" Pressure Treated Wood Blocking To Concrete	10.11	4.37
06 11 16 00-0174	LF	2" x 8" Pressure Treated Wood Blocking To Concrete	11.39	4.80
06 11 16 00-0175	LF	2" x 4" Wood Blocking To Concrete	8.53	3.97
06 11 16 00-0176	LF	2" x 6" Wood Blocking To Concrete	9.72	4.37
06 11 16 00-0177	LF	2" x 8" Wood Blocking To Concrete	11.01	4.80
06 11 16 00-0178		**Pressure Treated Lattice** *(06 11 16 00-0151)*		
06 11 16 00-0179	SF	3/4" Thick Pressure Treated Wood Lattice	8.04	3.02
06 11 16 00-0180		**Sleepers** *(06 11 16 00-0151)*		
06 11 16 00-0181		**Sleepers To Wood** *(06 11 16 00-0180)*		
06 11 16 00-0182	LF	1" x 2" Pressure Treated Wood Sleeper On Wood	1.43	0.51
06 11 16 00-0183	LF	1" x 3" Pressure Treated Wood Sleeper On Wood	1.52	0.58
06 11 16 00-0184	LF	1" x 4" Pressure Treated Wood Sleeper On Wood	1.81	0.65
06 11 16 00-0185	LF	2" x 4" Pressure Treated Wood Sleeper On Wood	2.33	0.79
06 11 16 00-0186	LF	2" x 6" Pressure Treated Wood Sleeper On Wood	2.98	0.86
06 11 16 00-0187		**Sleepers To Concrete** *(06 11 16 00-0180)*		
06 11 16 00-0188	LF	1" x 2" Pressure Treated Wood Sleeper On Concrete	1.48	0.51
06 11 16 00-0189	LF	1" x 3" Pressure Treated Wood Sleeper On Concrete	1.56	0.58
06 11 16 00-0190	LF	1" x 4" Pressure Treated Wood Sleeper On Concrete	1.86	0.65
06 11 16 00-0191	LF	2" x 4" Pressure Treated Wood Sleeper On Concrete	2.41	0.79
06 11 16 00-0192	LF	2" x 6" Pressure Treated Wood Sleeper On Concrete	3.10	0.86
06 11 16 00-0193		**Roofing Nailers** *(06 11 16)*		
06 11 16 00-0194	LF	2" x 4" Pressure Treated Lumber, For Roofing Nailers	3.82	1.14
06 11 16 00-0195	LF	2" x 6" Pressure Treated Lumber, For Roofing Nailers	4.31	1.23
06 11 16 00-0196	LF	2" x 8" Pressure Treated Lumber, For Roofing Nailers	4.82	1.30

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 11 16 00-0197		**Roofing Sleepers** *(06 11 16)*		
06 11 16 00-0198	LF	2" x 4" Pressure Treated Lumber, For Roofing Sleepers	1.59	
06 11 16 00-0199	LF	4" x 4" Pressure Treated Lumber, For Roofing Sleepers	4.03	
06 11 16 00-0200	LF	4" x 6" Pressure Treated Lumber, For Roofing Sleepers	5.66	
06 11 16 00-0201	LF	6" x 6" Pressure Treated Lumber, For Roofing Sleepers	8.08	
06 11 16 00-0202		**Canopy Framing, Bridging, And Furring** *(06 11 16)*		
06 11 16 00-0203		**Wood And Steel Bridging** *(06 11 16 00-0202)*		
06 11 16 00-0204		**Wood Bridging** *(06 11 16 00-0203)*		
06 11 16 00-0205	EA	1 Pair Wood Bridging, 1" x 3" Cross Type Note: For joists spaced at 16" on center.	11.53	5.03
06 11 16 00-0206	EA	1 Pair Wood Bridging, 2" x 3" Cross Type Note: For joists spaced at 16" on center.	11.82	5.03
06 11 16 00-0207		**Steel Bridging** *(06 11 16 00-0203)*		
06 11 16 00-0208	EA	1 Pair Steel Bridging, Wood Joists At 16" On Center	13.76	5.03
06 11 16 00-0209	EA	1 Pair Steel Bridging, Wood Joists At 24" On Center	13.72	5.03
06 11 16 00-0210		**Light Framing, Trim And Furring** *(06 11 16 00-0202)*		
06 11 16 00-0211		**Pine/Spruce/Fir Light Framing, Trim And Furring** *(06 11 16 00-0210)* Note: S4S board, select grade 1		
06 11 16 00-0212	LF	1" x 1" Pine/Spruce/Fir Light Framing, Trim And Furring	2.53	1.17
06 11 16 00-0213	LF	1" x 2" Pine/Spruce/Fir Light Framing, Trim And Furring	2.82	1.30
06 11 16 00-0214	LF	1" x 4" Pine/Spruce/Fir Light Framing, Trim And Furring	3.24	1.42
06 11 16 00-0215	LF	1" x 6" Pine/Spruce/Fir Light Framing, Trim And Furring	3.60	1.57
06 11 16 00-0216	LF	1" x 8" Pine/Spruce/Fir Light Framing, Trim And Furring	3.99	1.72
06 11 16 00-0217	LF	1" x 10" Pine/Spruce/Fir Light Framing, Trim And Furring	4.41	1.89
06 11 16 00-0218	LF	2" x 2" Pine/Spruce/Fir Light Framing, Trim And Furring	3.62	1.57
06 11 16 00-0219	LF	2" x 4" Pine/Spruce/Fir Light Framing, Trim And Furring	4.03	1.72
06 11 16 00-0220	LF	2" x 6" Pine/Spruce/Fir Light Framing, Trim And Furring	4.69	1.89
06 11 16 00-0221	LF	2" x 8" Pine/Spruce/Fir Light Framing, Trim And Furring	5.43	2.09
06 11 16 00-0222	LF	2" x 10" Pine/Spruce/Fir Light Framing, Trim And Furring	6.35	2.30
06 11 16 00-0223		**Cedar Light Framing, Trim And Furring** *(06 11 16 00-0210)* Note: S4S board, select grade 1		
06 11 16 00-0224	LF	1" x 1" Cedar Light Framing, Trim And Furring	2.56	1.17
06 11 16 00-0225	LF	1" x 2" Cedar Light Framing, Trim And Furring	2.97	1.30
06 11 16 00-0226	LF	1" x 4" Cedar Light Framing, Trim And Furring	3.82	1.42
06 11 16 00-0227	LF	1" x 6" Cedar Light Framing, Trim And Furring	4.58	1.57
06 11 16 00-0228	LF	1" x 8" Cedar Light Framing, Trim And Furring	6.56	1.72
06 11 16 00-0229	LF	1" x 10" Cedar Light Framing, Trim And Furring	7.69	1.89
06 11 16 00-0230	LF	2" x 2" Cedar Light Framing, Trim And Furring	3.99	1.57
06 11 16 00-0231	LF	2" x 4" Cedar Light Framing, Trim And Furring	4.58	1.72
06 11 16 00-0232		**Oak Light Framing, Trim And Furring** *(06 11 16 00-0210)* Note: S4S board, select grade 1		
06 11 16 00-0233	LF	1" x 1" Oak Light Framing, Trim And Furring	2.57	1.17
06 11 16 00-0234	LF	1" x 2" Oak Light Framing, Trim And Furring	2.99	1.30
06 11 16 00-0235	LF	1" x 4" Oak Light Framing, Trim And Furring	3.67	1.42
06 11 16 00-0236	LF	1" x 6" Oak Light Framing, Trim And Furring	4.36	1.57
06 11 16 00-0237	LF	1" x 8" Oak Light Framing, Trim And Furring	5.08	1.72
06 11 16 00-0238	LF	1" x 10" Oak Light Framing, Trim And Furring	5.85	1.89
06 11 16 00-0239	LF	2" x 2" Oak Light Framing, Trim And Furring	3.95	1.57
06 11 16 00-0240	LF	2" x 4" Oak Light Framing, Trim And Furring	5.09	1.72
06 11 16 00-0241		**Redwood Light Framing, Trim And Furring** *(06 11 16 00-0210)* Note: S4S board, select grade 1		
06 11 16 00-0242	LF	1" x 1" Redwood Light Framing, Trim And Furring	2.50	1.17
06 11 16 00-0243	LF	1" x 2" Redwood Light Framing, Trim And Furring	2.88	1.30
06 11 16 00-0244	LF	1" x 4" Redwood Light Framing, Trim And Furring	3.47	1.42
06 11 16 00-0245	LF	1" x 6" Redwood Light Framing, Trim And Furring	4.12	1.57
06 11 16 00-0246	LF	1" x 8" Redwood Light Framing, Trim And Furring	4.83	1.72
06 11 16 00-0247	LF	1" x 10" Redwood Light Framing, Trim And Furring	5.61	1.89
06 11 16 00-0248	LF	2" x 2" Redwood Light Framing, Trim And Furring	4.14	1.57
06 11 16 00-0249	LF	2" x 4" Redwood Light Framing, Trim And Furring	4.85	1.72
06 11 16 00-0250		**Poplar Light Framing, Trim And Furring** *(06 11 16 00-0210)* Note: S4S board, select grade 1		
06 11 16 00-0251	LF	1" x 1" Poplar Light Framing, Trim And Furring	2.85	1.17
06 11 16 00-0252	LF	1" x 2" Poplar Light Framing, Trim And Furring	3.42	1.30

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 11 16 00-0253	LF	1" x 4" Poplar Light Framing, Trim And Furring	4.24	1.42
06 11 16 00-0254	LF	1" x 6" Poplar Light Framing, Trim And Furring	5.31	1.57
06 11 16 00-0255	LF	1" x 8" Poplar Light Framing, Trim And Furring	6.13	1.72
06 11 16 00-0256	LF	1" x 10" Poplar Light Framing, Trim And Furring	7.95	1.89
06 11 16 00-0257	LF	1" x 12" Poplar Light Framing, Trim And Furring	8.54	1.89
06 11 16 00-0258	LF	2" x 2" Poplar Light Framing, Trim And Furring	6.79	1.57
06 11 16 00-0259	LF	2" x 4" Poplar Light Framing, Trim And Furring	7.59	1.72
06 11 16 00-0260	LF	2" x 6" Poplar Light Framing, Trim And Furring	10.01	1.89
06 11 16 00-0261		Maple Light Framing, Trim And Furring *(06 11 16 00-0210)*		
		Note: S4S board, select grade 1		
06 11 16 00-0262	LF	1" x 4" Maple Light Framing, Trim And Furring	5.17	1.42
06 11 16 00-0263	LF	1" x 6" Maple Light Framing, Trim And Furring	6.74	1.57
06 11 16 00-0264	LF	1" x 8" Maple Light Framing, Trim And Furring	8.36	1.72

06 13 Heavy Timber Construction *(06 10)*

06 13 23 Heavy Timber Framing *(06 13)*

06 13 23 00-0001 Heavy Timber Framing *(06 13 23)*
Note: Excludes fasteners. See CSI section 06 05 23 00-0093 for bolts and fasteners.

06 13 23 00-0002 Heavy Timber Beams *(06 13 23 00-0001)*

06 13 23 00-0003 Pine, Heavy Timber Beams *(06 13 23 00-0002)*

06 13 23 00-0004	LF	4" x 4", Pine, Heavy Timber Beam	7.13	2.55
06 13 23 00-0005	LF	4" x 6", Pine, Heavy Timber Beam	8.37	2.65
06 13 23 00-0006	LF	4" x 8", Pine, Heavy Timber Beam	9.59	2.76
06 13 23 00-0007	LF	4" x 10", Pine, Heavy Timber Beam	12.05	2.95
06 13 23 00-0008	LF	4" x 12", Pine, Heavy Timber Beam	14.09	3.13
06 13 23 00-0009	LF	6" x 6", Pine, Heavy Timber Beam	10.26	2.88
06 13 23 00-0010	LF	6" x 8", Pine, Heavy Timber Beam	12.04	3.02
06 13 23 00-0011	LF	6" x 10", Pine, Heavy Timber Beam	15.71	3.23
06 13 23 00-0012	LF	6" x 12", Pine, Heavy Timber Beam	18.35	3.30
06 13 23 00-0013	LF	8" x 8", Pine, Heavy Timber Beam	14.37	3.13
06 13 23 00-0014	LF	8" x 10", Pine, Heavy Timber Beam	18.79	3.23
06 13 23 00-0015	LF	8" x 12", Pine, Heavy Timber Beam	22.40	3.30
06 13 23 00-0016	LF	10" x 10", Pine, Heavy Timber Beam	22.16	3.30
06 13 23 00-0017	LF	10" x 12", Pine, Heavy Timber Beam	26.77	3.60
06 13 23 00-0018	LF	12" x 12", Pine, Heavy Timber Beam	31.40	3.95

06 13 23 00-0019 Douglas Fir, Heavy Timber Beams *(06 13 23 00-0002)*

06 13 23 00-0020	LF	4" x 4", Douglas Fir, Heavy Timber Beam	7.34	2.55
06 13 23 00-0021	LF	4" x 6", Douglas Fir, Heavy Timber Beam	8.67	2.65
06 13 23 00-0022	LF	4" x 8", Douglas Fir, Heavy Timber Beam	10.00	2.76
06 13 23 00-0023	LF	4" x 10", Douglas Fir, Heavy Timber Beam	12.67	2.95
06 13 23 00-0024	LF	4" x 12", Douglas Fir, Heavy Timber Beam	14.86	3.13
06 13 23 00-0025	LF	6" x 6", Douglas Fir, Heavy Timber Beam	10.71	2.88
06 13 23 00-0026	LF	6" x 8", Douglas Fir, Heavy Timber Beam	12.64	3.02
06 13 23 00-0027	LF	6" x 10", Douglas Fir, Heavy Timber Beam	16.62	3.23
06 13 23 00-0028	LF	6" x 12", Douglas Fir, Heavy Timber Beam	19.53	3.30
06 13 23 00-0029	LF	8" x 8", Douglas Fir, Heavy Timber Beam	15.18	3.13
06 13 23 00-0030	LF	8" x 10", Douglas Fir, Heavy Timber Beam	20.02	3.23
06 13 23 00-0031	LF	8" x 12", Douglas Fir, Heavy Timber Beam	23.97	3.30
06 13 23 00-0032	LF	10" x 10", Douglas Fir, Heavy Timber Beam	23.69	3.30
06 13 23 00-0033	LF	10" x 12", Douglas Fir, Heavy Timber Beam	28.70	3.60
06 13 23 00-0034	LF	12" x 12", Douglas Fir, Heavy Timber Beam	33.74	3.95

06 13 23 00-0035 Pressure Treated, Heavy Timber Beams *(06 13 23 00-0002)*

06 13 23 00-0036	LF	4" x 4", Pressure Treated, Heavy Timber Beam	7.04	2.55
06 13 23 00-0037	LF	4" x 6", Pressure Treated, Heavy Timber Beam	8.40	2.65
06 13 23 00-0038	LF	4" x 8", Pressure Treated, Heavy Timber Beam	9.60	2.76
06 13 23 00-0039	LF	4" x 10", Pressure Treated, Heavy Timber Beam	12.05	2.95
06 13 23 00-0040	LF	4" x 12", Pressure Treated, Heavy Timber Beam	14.08	3.13
06 13 23 00-0041	LF	6" x 6", Pressure Treated, Heavy Timber Beam	10.89	2.88
06 13 23 00-0042	LF	6" x 8", Pressure Treated, Heavy Timber Beam	12.91	3.02
06 13 23 00-0043	LF	6" x 10", Pressure Treated, Heavy Timber Beam	15.18	3.23
06 13 23 00-0044	LF	6" x 12", Pressure Treated, Heavy Timber Beam	18.05	3.30
06 13 23 00-0045	LF	8" x 8", Pressure Treated, Heavy Timber Beam	18.05	3.13
06 13 23 00-0046	LF	8" x 10", Pressure Treated, Heavy Timber Beam	20.62	3.23
06 13 23 00-0047	LF	8" x 12", Pressure Treated, Heavy Timber Beam	23.91	3.30
06 13 23 00-0048	LF	10" x 10", Pressure Treated, Heavy Timber Beam	24.01	3.30
06 13 23 00-0049	LF	10" x 12", Pressure Treated, Heavy Timber Beam	31.01	3.60
06 13 23 00-0050	LF	12" x 12", Pressure Treated, Heavy Timber Beam	36.50	3.95

06 13 23 00-0051 Heavy Timber Columns *(06 13 23 00-0001)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 13 23 00-0052		**Pine, Heavy Timber Columns** *(06 13 23 00-0051)*		
06 13 23 00-0053	LF	4" x 4", Pine, Heavy Timber Column	4.71	1.34
06 13 23 00-0054	LF	4" x 6", Pine, Heavy Timber Column	5.89	1.42
06 13 23 00-0055	LF	4" x 8", Pine, Heavy Timber Column	6.97	1.46
06 13 23 00-0056	LF	4" x 10", Pine, Heavy Timber Column	9.26	1.55
06 13 23 00-0057	LF	4" x 12", Pine, Heavy Timber Column	11.13	1.64
06 13 23 00-0058	LF	6" x 6", Pine, Heavy Timber Column	7.57	1.50
06 13 23 00-0059	LF	6" x 8", Pine, Heavy Timber Column	9.22	1.57
06 13 23 00-0060	LF	6" x 10", Pine, Heavy Timber Column	12.65	1.70
06 13 23 00-0061	LF	6" x 12", Pine, Heavy Timber Column	15.22	1.74
06 13 23 00-0062	LF	8" x 8", Pine, Heavy Timber Column	11.41	1.64
06 13 23 00-0063	LF	8" x 10", Pine, Heavy Timber Column	15.73	1.70
06 13 23 00-0064	LF	8" x 12", Pine, Heavy Timber Column	19.20	1.77
06 13 23 00-0065	LF	10" x 10", Pine, Heavy Timber Column	18.95	1.77
06 13 23 00-0066	LF	10" x 12", Pine, Heavy Timber Column	23.37	1.89
06 13 23 00-0067	LF	12" x 12", Pine, Heavy Timber Column	27.66	2.08
06 13 23 00-0068		**Douglas Fir, Heavy Timber Columns** *(06 13 23 00-0051)*		
06 13 23 00-0069	LF	4" x 4", Douglas Fir, Heavy Timber Column	4.92	1.34
06 13 23 00-0070	LF	4" x 6", Douglas Fir, Heavy Timber Column	6.19	1.42
06 13 23 00-0071	LF	4" x 8", Douglas Fir, Heavy Timber Column	7.38	1.46
06 13 23 00-0072	LF	4" x 10", Douglas Fir, Heavy Timber Column	9.88	1.55
06 13 23 00-0073	LF	4" x 12", Douglas Fir, Heavy Timber Column	11.90	1.64
06 13 23 00-0074	LF	6" x 6", Douglas Fir, Heavy Timber Column	8.02	1.50
06 13 23 00-0075	LF	6" x 8", Douglas Fir, Heavy Timber Column	9.82	1.57
06 13 23 00-0076	LF	6" x 10", Douglas Fir, Heavy Timber Column	13.56	1.70
06 13 23 00-0077	LF	6" x 12", Douglas Fir, Heavy Timber Column	16.40	1.74
06 13 23 00-0078	LF	8" x 8", Douglas Fir, Heavy Timber Column	12.22	1.64
06 13 23 00-0079	LF	8" x 10", Douglas Fir, Heavy Timber Column	16.96	1.70
06 13 23 00-0080	LF	8" x 12", Douglas Fir, Heavy Timber Column	20.77	1.77
06 13 23 00-0081	LF	10" x 10", Douglas Fir, Heavy Timber Column	20.48	1.77
06 13 23 00-0082	LF	10" x 12", Douglas Fir, Heavy Timber Column	25.30	1.89
06 13 23 00-0083	LF	12" x 12", Douglas Fir, Heavy Timber Column	30.00	2.08
06 13 23 00-0084		**Pressure Treated, Heavy Timber Columns** *(06 13 23 00-0051)*		
06 13 23 00-0085	LF	4" x 4", Pressure Treated, Heavy Timber Column	4.62	1.34
06 13 23 00-0086	LF	4" x 6", Pressure Treated, Heavy Timber Column	5.92	1.42
06 13 23 00-0087	LF	4" x 8", Pressure Treated, Heavy Timber Column	6.98	1.46
06 13 23 00-0088	LF	4" x 10", Pressure Treated, Heavy Timber Column	9.26	1.55
06 13 23 00-0089	LF	4" x 12", Pressure Treated, Heavy Timber Column	11.12	1.64
06 13 23 00-0090	LF	6" x 6", Pressure Treated, Heavy Timber Column	8.20	1.50
06 13 23 00-0091	LF	6" x 8", Pressure Treated, Heavy Timber Column	10.09	1.57
06 13 23 00-0092	LF	6" x 10", Pressure Treated, Heavy Timber Column	12.12	1.70
06 13 23 00-0093	LF	6" x 12", Pressure Treated, Heavy Timber Column	14.92	1.74
06 13 23 00-0094	LF	8" x 8", Pressure Treated, Heavy Timber Column	15.09	1.64
06 13 23 00-0095	LF	8" x 10", Pressure Treated, Heavy Timber Column	17.56	1.70
06 13 23 00-0096	LF	8" x 12", Pressure Treated, Heavy Timber Column	20.71	1.77
06 13 23 00-0097	LF	10" x 10", Pressure Treated, Heavy Timber Column	20.80	1.77
06 13 23 00-0098	LF	10" x 12", Pressure Treated, Heavy Timber Column	27.61	1.89
06 13 23 00-0099	LF	12" x 12", Pressure Treated, Heavy Timber Column	32.76	2.08

06 15 Wood Decking *(06 10)*

06 15 13 Wood Floor Decking *(06 15)*

06 15 13 00-0001 Wood Deck System Assemblies *(06 15 13)*
Note: Includes the deck, joists, girders, railing posts 8' on-center, pickets and railing. Excludes ground posts.

06 15 13 00-0002 Pressure Treated Wood Deck System Assemblies *(06 15 13 00-0001)*

06 15 13 00-0003 2" x 8" Joists At 16" On Center, Pressure Treated Wood Deck System Assemblies *(06 15 13 00-0002)*

06 15 13 00-0004	SF	5/4" x 4" Pressure Treated Decking, 2" x 8" Pressure Treated Joists 16" On Center, Wood Deck System Assembly	42.98	8.57
06 15 13 00-0005	SF	5/4" x 6" Pressure Treated Decking, 2" x 8" Pressure Treated Joists 16" On Center, Wood Deck System Assembly	41.48	8.15
06 15 13 00-0006	SF	2" x 4" Pressure Treated Decking, 2" x 8" Pressure Treated Joists 16" On Center, Wood Deck System Assembly	44.50	8.80
06 15 13 00-0007	SF	2" x 6" Pressure Treated Decking, 2" x 8" Pressure Treated Joists 16" On Center, Wood Deck System Assembly	43.01	8.36

06 15 13 00-0008 2" x 10" Joists At 16" On Center, Pressure Treated Wood Deck System Assemblies *(06 15 13 00-0002)*

06 15 13 00-0009	SF	5/4" x 4" Pressure Treated Decking, 2" x 10" Pressure Treated Joists 16" On Center, Wood Deck System Assembly	44.37	8.80
06 15 13 00-0010	SF	5/4" x 6" Pressure Treated Decking, 2" x 10" Pressure Treated Joists 16" On Center, Wood Deck System Assembly	42.81	8.35
06 15 13 00-0011	SF	2" x 4" Pressure Treated Decking, 2" x 10" Pressure Treated Joists 16" On Center, Wood Deck System Assembly	45.92	9.02
06 15 13 00-0012	SF	2" x 6" Pressure Treated Decking, 2" x 10" Pressure Treated Joists 16" On Center, Wood Deck System Assembly	44.39	8.56

copyright 2026 The Gordian Group, Inc.

CSI	MINOR UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 15 13 00-0013		2" x 10" Joists At 24" On Center, Pressure Treated Wood Deck System Assemblies *(06 15 13 00-0002)*		
06 15 13 00-0014	SF	5/4" x 4" Pressure Treated Decking, 2" x 10" Pressure Treated Joists 24" On Center, Wood Deck System Assembly	42.98	8.57
06 15 13 00-0015	SF	5/4" x 6" Pressure Treated Decking, 2" x 10" Pressure Treated Joists 24" On Center, Wood Deck System Assembly	41.48	8.15
06 15 13 00-0016	SF	2" x 4" Pressure Treated Decking, 2" x 10" Pressure Treated Joists 24" On Center, Wood Deck System Assembly	44.50	8.80
06 15 13 00-0017	SF	2" x 6" Pressure Treated Decking, 2" x 10" Pressure Treated Joists 24" On Center, Wood Deck System Assembly	43.01	8.36
06 15 13 00-0018		Redwood With Pressure Treated Joists, Wood Deck System Assemblies *(06 15 13 00-0001)*		
06 15 13 00-0019		2" x 8" Joists At 16" On Center, Redwood With Pressure Treated Joists, Wood Deck System Assemblies *(06 15 13 00-0018)*		
06 15 13 00-0020	SF	5/4" x 4" Redwood Decking, 2" x 8" Pressure Treated Joists 16" On Center, Wood Deck System Assembly	45.41	8.57
06 15 13 00-0021	SF	5/4" x 6" Redwood Decking, 2" x 8" Pressure Treated Joists 16" On Center, Wood Deck System Assembly	44.03	8.54
06 15 13 00-0022	SF	2" x 4" Redwood Decking, 2" x 8" Pressure Treated Joists 16" On Center, Wood Deck System Assembly	47.55	8.80
06 15 13 00-0023	SF	2" x 6" Redwood Decking, 2" x 8" Pressure Treated Joists 16" On Center, Wood Deck System Assembly	45.88	8.36
06 15 13 00-0024		2" x 10" Joists At 16" On Center, Redwood With Pressure Treated Joists, Wood Deck System Assemblies *(06 15 13 00-0018)*		
06 15 13 00-0025	SF	5/4" x 4" Redwood Decking, 2" x 10" Pressure Treated Joists 16" On Center, Wood Deck System Assembly Assembly	48.19	8.80
06 15 13 00-0026	SF	5/4" x 6" Redwood Decking, 2" x 10" Pressure Treated Joists 16" On Center, Wood Deck System Assembly	46.74	8.35
06 15 13 00-0027	SF	2" x 4" Redwood Decking, 2" x 10" Pressure Treated Joists 16" On Center, Wood Deck System Assembly	50.49	9.02
06 15 13 00-0028	SF	2" x 6" Redwood Decking, 2" x 10" Pressure Treated Joists 16" On Center, Wood Deck System Assembly	48.80	8.56
06 15 13 00-0029		2" x 10" Joists At 24" On Center, Redwood With Pressure Treated Joists, Wood Deck System Assemblies *(06 15 13 00-0018)*		
06 15 13 00-0030	SF	5/4" x 4" Redwood Decking, 2" x 10" Pressure Treated Joists 24" On Center, Wood Deck System Assembly	46.39	8.57
06 15 13 00-0031	SF	5/4" x 6" Redwood Decking, 2" x 10" Pressure Treated Joists 24" On Center, Wood Deck System Assembly	45.01	8.15
06 15 13 00-0032	SF	2" x 4" Redwood Decking, 2" x 10" Pressure Treated Joists 24" On Center, Wood Deck System Assembly	48.59	8.80
06 15 13 00-0033	SF	2" x 6" Redwood Decking, 2" x 10" Pressure Treated Joists 24" On Center, Wood Deck System Assembly	47.69	8.36
06 15 13 00-0034		Wood Ramp System Assemblies *(06 15 13)* Note: Includes the decking, joists, girders, railing posts at corners and along ramp, pickets and railing. Excludes ground posts.		
06 15 13 00-0035		Pressure Treated Wood Ramp System Assemblies *(06 15 13 00-0034)*		
06 15 13 00-0036		2" x 6" Joists, Pressure Treated Wood Ramp System Assemblies *(06 15 13 00-0035)*		
06 15 13 00-0037	SF	5/4" x 4" Pressure Treated Decking, 2" x 6" Pressure Treated Joists, Wood Ramp System Assembly	50.43	8.36
06 15 13 00-0038	SF	5/4" x 6" Pressure Treated Decking, 2" x 6" Pressure Treated Joists, Wood Ramp System Assembly	48.52	7.94
06 15 13 00-0039	SF	2" x 4" Pressure Treated Decking, 2" x 6" Pressure Treated Joists, Wood Ramp System Assembly	52.12	8.57
06 15 13 00-0040	SF	2" x 6" Pressure Treated Decking, 2" x 6" Pressure Treated Joists, Wood Ramp System Assembly	50.20	8.15
06 15 13 00-0041		2" x 8" Joists, Pressure Treated Wood Ramp System Assemblies *(06 15 13 00-0035)*		
06 15 13 00-0042	SF	5/4" x 4" Pressure Treated Decking, 2" x 8" Pressure Treated Joists, Wood Ramp System Assembly	51.97	8.57
06 15 13 00-0043	SF	5/4" x 6" Pressure Treated Decking, 2" x 8" Pressure Treated Joists, Wood Ramp System Assembly	50.02	8.15
06 15 13 00-0044	SF	2" x 4" Pressure Treated Decking, 2" x 8" Pressure Treated Joists, Wood Ramp System Assembly	53.72	8.80
06 15 13 00-0045	SF	2" x 6" Pressure Treated Decking, 2" x 8" Pressure Treated Joists, Wood Ramp System Assembly	51.77	8.36
06 15 13 00-0046		2" x 10" Joists, Pressure Treated Wood Ramp System Assemblies *(06 15 13 00-0035)*		
06 15 13 00-0047	SF	5/4" x 4" Pressure Treated Decking, 2" x 10" Pressure Treated Joists, Wood Ramp System Assembly	53.56	8.79
06 15 13 00-0048	SF	5/4" x 6" Pressure Treated Decking, 2" x 10" Pressure Treated Joists, Wood Ramp System Assembly	51.58	8.35
06 15 13 00-0049	SF	2" x 4" Pressure Treated Decking, 2" x 10" Pressure Treated Joists, Wood Ramp System Assembly	55.37	9.02
06 15 13 00-0050	SF	2" x 6" Pressure Treated Decking, 2" x 10" Pressure Treated Joists, Wood Ramp System Assembly	53.37	8.56
06 15 13 00-0051		Redwood With Pressure Treated Joists, Wood Ramp System Assemblies *(06 15 13 00-0034)*		
06 15 13 00-0052		2" x 6" Joists, Redwood With Pressure Treated Joists, Wood Ramp System Assemblies *(06 15 13 00-0051)*		
06 15 13 00-0053	SF	5/4" x 4" Redwood Decking, 2" x 6" Pressure Treated Joists, Wood Ramp System Assembly	52.71	8.36
06 15 13 00-0054	SF	5/4" x 6" Redwood Decking, 2" x 6" Pressure Treated Joists, Wood Ramp System Assembly	50.91	7.94
06 15 13 00-0055	SF	2" x 4" Redwood Decking, 2" x 6" Pressure Treated Joists, Wood Ramp System Assembly	54.98	8.57
06 15 13 00-0056	SF	2" x 6" Redwood Decking, 2" x 6" Pressure Treated Joists, Wood Ramp System Assembly	52.90	8.15
06 15 13 00-0057		2" x 8" Joists, Redwood With Pressure Treated Joists, Wood Ramp System Assemblies *(06 15 13 00-0051)*		
06 15 13 00-0058	SF	5/4" x 4" Redwood Decking, 2" x 8" Pressure Treated Joists, Wood Ramp System Assembly	54.40	8.57

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 15 13 00-0059	SF	5/4" x 6" Redwood Decking, 2" x 8" Pressure Treated Joists, Wood Ramp System Assembly	52.57	8.15
06 15 13 00-0060	SF	2" x 4" Redwood Decking, 2" x 8" Pressure Treated Joists, Wood Ramp System Assembly	56.77	8.80
06 15 13 00-0061	SF	2" x 6" Redwood Decking, 2" x 8" Pressure Treated Joists, Wood Ramp System Assembly	54.64	8.36
06 15 13 00-0062		2" x 10" Joists, Redwood With Pressure Treated Joists, Wood Ramp System Assemblies *(06 15 13 00-0051)*		
06 15 13 00-0063	SF	5/4" x 4" Redwood Decking, 2" x 10" Pressure Treated Joists, Wood Ramp System Assembly	57.40	8.79
06 15 13 00-0064	SF	5/4" x 6" Redwood Decking, 2" x 10" Pressure Treated Joists, Wood Ramp System Assembly	55.51	8.35
06 15 13 00-0065	SF	2" x 4" Redwood Decking, 2" x 10" Pressure Treated Joists, Wood Ramp System Assembly	59.95	9.02
06 15 13 00-0066	SF	2" x 6" Redwood Decking, 2" x 10" Pressure Treated Joists, Wood Ramp System Assembly	58.28	8.56
06 15 13 00-0067		Cedar With Pressure Treated Joists, Wood Ramp System Assemblies *(06 15 13 00-0034)*		
06 15 13 00-0068		2" x 6" Joists, Cedar With Pressure Treated Joists, Wood Ramp System Assemblies *(06 15 13 00-0067)*		
06 15 13 00-0069	SF	5/4" x 4" Cedar Decking, 2" x 6" Pressure Treated Joists, Wood Ramp System Assembly	51.24	8.36
06 15 13 00-0070	SF	5/4" x 6" Cedar Decking, 2" x 6" Pressure Treated Joists, Wood Ramp System Assembly	49.36	7.94
06 15 13 00-0071	SF	2" x 4" Cedar Decking, 2" x 6" Pressure Treated Joists, Wood Ramp System Assembly	52.99	8.57
06 15 13 00-0072	SF	2" x 6" Cedar Decking, 2" x 6" Pressure Treated Joists, Wood Ramp System Assembly	51.12	8.15
06 15 13 00-0073		2" x 8" Joists, Cedar With Pressure Treated Joists, Wood Ramp System Assemblies *(06 15 13 00-0067)*		
06 15 13 00-0074	SF	5/4" x 4" Cedar Decking, 2" x 8" Pressure Treated Joists, Wood Ramp System Assembly	52.83	8.57
06 15 13 00-0075	SF	5/4" x 6" Cedar Decking, 2" x 8" Pressure Treated Joists, Wood Ramp System Assembly	50.92	8.15
06 15 13 00-0076	SF	2" x 4" Cedar Decking, 2" x 8" Pressure Treated Joists, Wood Ramp System Assembly	54.66	8.80
06 15 13 00-0077	SF	2" x 6" Cedar Decking, 2" x 8" Pressure Treated Joists, Wood Ramp System Assembly	52.74	8.36
06 15 13 00-0078		2" x 10" Joists, Cedar With Pressure Treated Joists, Wood Ramp System Assemblies *(06 15 13 00-0067)*		
06 15 13 00-0079	SF	5/4" x 4" Cedar Decking, 2" x 10" Pressure Treated Joists, Wood Ramp System Assembly	54.50	8.79
06 15 13 00-0080	SF	5/4" x 6" Cedar Decking, 2" x 10" Pressure Treated Joists, Wood Ramp System Assembly	52.54	8.35
06 15 13 00-0081	SF	2" x 4" Cedar Decking, 2" x 10" Pressure Treated Joists, Wood Ramp System Assembly	56.37	9.02
06 15 13 00-0082	SF	2" x 6" Cedar Decking, 2" x 10" Pressure Treated Joists, Wood Ramp System Assembly	54.41	8.56
06 15 13 00-0083		Wood Stair System Assemblies *(06 15 13)* Note: Includes the decking, joists, girders, railing posts at corners and along stairs, pickets and railing. Excludes ground posts.		
06 15 13 00-0084		Pressure Treated Wood Stair System Assemblies *(06 15 13 00-0083)*		
06 15 13 00-0085		2" x 10" Joists, Pressure Treated Wood Stair System Assemblies *(06 15 13 00-0084)*		
06 15 13 00-0086	RSR	3' Wide, 5/4" x 4" Pressure Treated Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	134.86	20.57
06 15 13 00-0087	RSR	3' Wide, 5/4" x 6" Pressure Treated Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	131.04	19.54
06 15 13 00-0088	RSR	3' Wide, 2" x 4" Pressure Treated Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	138.91	21.10
06 15 13 00-0089	RSR	3' Wide, 2" x 6" Pressure Treated Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	134.50	20.05
06 15 13 00-0090	RSR	3'-6" Wide, 5/4" x 4" Pressure Treated Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	141.60	21.61
06 15 13 00-0091	RSR	3'-6" Wide, 5/4" x 6" Pressure Treated Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	137.60	20.53
06 15 13 00-0092	RSR	3'-6" Wide, 2" x 4" Pressure Treated Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	145.87	22.16
06 15 13 00-0093	RSR	3'-6" Wide, 2" x 6" Pressure Treated Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	141.22	21.06
06 15 13 00-0094	RSR	4' Wide, 5/4" x 4" Pressure Treated Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	148.55	22.69
06 15 13 00-0095	RSR	4' Wide, 5/4" x 6" Pressure Treated Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	144.32	21.55
06 15 13 00-0096	RSR	4' Wide, 2" x 4" Pressure Treated Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	153.02	23.27
06 15 13 00-0097	RSR	4' Wide, 2" x 6" Pressure Treated Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	148.14	22.11
06 15 13 00-0098	RSR	5' Wide, 5/4" x 4" Pressure Treated Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	157.46	23.82
06 15 13 00-0099	RSR	5' Wide, 5/4" x 6" Pressure Treated Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	153.12	22.63
06 15 13 00-0100	RSR	5' Wide, 2" x 4" Pressure Treated Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	162.22	24.44
06 15 13 00-0101	RSR	5' Wide, 2" x 6" Pressure Treated Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	157.15	23.22
06 15 13 00-0102		2" x 12" Joists, Pressure Treated Wood Stair System Assemblies *(06 15 13 00-0084)*		
06 15 13 00-0103	RSR	3' Wide, 5/4" x 4" Pressure Treated Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	137.82	21.09
06 15 13 00-0104	RSR	3' Wide, 5/4" x 6" Pressure Treated Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	133.44	20.04
06 15 13 00-0105	RSR	3' Wide, 2" x 4" Pressure Treated Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	142.10	21.64
06 15 13 00-0106	RSR	3' Wide, 2" x 6" Pressure Treated Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	137.62	20.55
06 15 13 00-0107	RSR	3'-6" Wide, 5/4" x 4" Pressure Treated Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	144.71	22.15
06 15 13 00-0108	RSR	3'-6" Wide, 5/4" x 6" Pressure Treated Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	140.12	21.04
06 15 13 00-0109	RSR	3'-6" Wide, 2" x 4" Pressure Treated Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	149.20	22.71

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 15 13 00-0110	RSR	3'-6" Wide, 2" x 6" Pressure Treated Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	144.51	21.57
06 15 13 00-0111	RSR	4' Wide, 5/4" x 4" Pressure Treated Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	151.82	23.25
06 15 13 00-0112	RSR	4' Wide, 5/4" x 6" Pressure Treated Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	146.98	22.09
06 15 13 00-0113	RSR	4' Wide, 2" x 4" Pressure Treated Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	156.52	23.85
06 15 13 00-0114	RSR	4' Wide, 2" x 6" Pressure Treated Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	151.59	22.67
06 15 13 00-0115	RSR	5' Wide, 5/4" x 4" Pressure Treated Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	160.90	24.42
06 15 13 00-0116	RSR	5' Wide, 5/4" x 6" Pressure Treated Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	155.90	23.20
06 15 13 00-0117	RSR	5' Wide, 2" x 4" Pressure Treated Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	165.91	25.04
06 15 13 00-0118	RSR	5' Wide, 2" x 6" Pressure Treated Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	160.79	23.79

06 15 13 00-0119 Redwood With Pressure Treated Joists, Wood Stair System Assemblies *(06 15 13 00-0083)*

06 15 13 00-0120 2" x 10" Joists, Redwood With Pressure Treated Joists, Wood Stair System Assemblies *(06 15 13 00-0119)*

06 15 13 00-0121	RSR	3' Wide, 5/4" x 4" Redwood Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	148.38	20.57
06 15 13 00-0122	RSR	3' Wide, 5/4" x 6" Redwood Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	144.44	19.54
06 15 13 00-0123	RSR	3' Wide, 2" x 4" Redwood Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	153.28	21.10
06 15 13 00-0124	RSR	3' Wide, 2" x 6" Redwood Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	149.29	20.05
06 15 13 00-0125	RSR	3'-6" Wide, 5/4" x 4" Redwood Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	155.79	21.61
06 15 13 00-0126	RSR	3'-6" Wide, 5/4" x 6" Redwood Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	151.67	20.53
06 15 13 00-0127	RSR	3'-6" Wide, 2" x 4" Redwood Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	160.95	22.16
06 15 13 00-0128	RSR	3'-6" Wide, 2" x 6" Redwood Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	156.75	21.06
06 15 13 00-0129	RSR	4' Wide, 5/4" x 4" Redwood Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	163.38	22.69
06 15 13 00-0130	RSR	4' Wide, 5/4" x 6" Redwood Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	159.02	21.55
06 15 13 00-0131	RSR	4' Wide, 2" x 4" Redwood Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	168.77	23.27
06 15 13 00-0132	RSR	4' Wide, 2" x 6" Redwood Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	164.36	22.11
06 15 13 00-0133	RSR	5' Wide, 5/4" x 4" Redwood Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	173.77	23.82
06 15 13 00-0134	RSR	5' Wide, 5/4" x 6" Redwood Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	169.28	22.63
06 15 13 00-0135	RSR	5' Wide, 2" x 4" Redwood Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	179.55	24.44
06 15 13 00-0136	RSR	5' Wide, 2" x 6" Redwood Decking With 2" x 10" Pressure Treated Joists, Wood Stair System Assembly	174.99	23.22

06 15 13 00-0137 2" x 12" Joists, Redwood With Pressure Treated Joists, Wood Stair System Assemblies *(06 15 13 00-0119)*

06 15 13 00-0138	RSR	3' Wide, 5/4" x 4" Redwood Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	147.35	21.09
06 15 13 00-0139	RSR	3' Wide, 5/4" x 6" Redwood Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	143.32	20.04
06 15 13 00-0140	RSR	3' Wide, 2" x 4" Redwood Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	152.02	21.64
06 15 13 00-0141	RSR	3' Wide, 2" x 6" Redwood Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	148.01	20.55
06 15 13 00-0142	RSR	3'-6" Wide, 5/4" x 4" Redwood Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	154.72	22.15
06 15 13 00-0143	RSR	3'-6" Wide, 5/4" x 6" Redwood Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	150.48	21.04
06 15 13 00-0144	RSR	3'-6" Wide, 2" x 4" Redwood Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	159.62	22.71
06 15 13 00-0145	RSR	3'-6" Wide, 2" x 6" Redwood Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	155.41	21.57
06 15 13 00-0146	RSR	4' Wide, 5/4" x 4" Redwood Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	162.28	23.25
06 15 13 00-0147	RSR	4' Wide, 5/4" x 6" Redwood Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	157.81	22.09
06 15 13 00-0148	RSR	4' Wide, 2" x 4" Redwood Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	167.41	23.85
06 15 13 00-0149	RSR	4' Wide, 2" x 6" Redwood Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	162.99	22.67
06 15 13 00-0150	RSR	5' Wide, 5/4" x 4" Redwood Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	172.41	24.42
06 15 13 00-0151	RSR	5' Wide, 5/4" x 6" Redwood Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	167.81	23.20
06 15 13 00-0152	RSR	5' Wide, 2" x 4" Redwood Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	177.88	25.04
06 15 13 00-0153	RSR	5' Wide, 2" x 6" Redwood Decking With 2" x 12" Pressure Treated Joists, Wood Stair System Assembly	173.33	23.79

06 15 13 00-0154 Wood Deck And Ramp Systems Repairs *(06 15 13)*

Note: Includes removal of material and screws. Excludes anchors and bolts.

06 15 13 00-0155 Deck Joist Or Girt *(06 15 13 00-0154)*

See CSI section 06 11 16 00-0012 for treated wood joist replacement.

06 15 13 00-0156 Deck Boards *(06 15 13 00-0154)*

06 15 13 00-0157	LF	5/4" x 4" Round Edge Pressure Treated Deck Boards	2.48	1.10
06 15 13 00-0158	LF	5/4" x 6" Round Edge Pressure Treated Deck Boards	2.76	1.31
06 15 13 00-0159	LF	2" x 4" Round Edge Pressure Treated Deck Boards	2.46	1.31
06 15 13 00-0160	LF	2" x 6" Round Edge Pressure Treated Deck Boards	3.11	1.51
06 15 13 00-0161	LF	2" x 8" Round Edge Pressure Treated Deck Boards	3.88	1.81
06 15 13 00-0162	LF	2" x 10" Round Edge Pressure Treated Deck Boards	4.75	2.21
06 15 13 00-0163	LF	2" x 12" Round Edge Pressure Treated Deck Boards	5.79	2.61
06 15 13 00-0164	LF	2" x 4" Round Edge Cedar Deck Boards	3.08	1.31
06 15 13 00-0165	LF	2" x 6" Round Edge Cedar Deck Boards	3.95	1.51
06 15 13 00-0166	LF	2" x 4" Round Edge Redwood Deck Boards	3.35	1.31
06 15 13 00-0167	LF	2" x 6" Round Edge Redwood Deck Boards	4.35	1.51

06 15 13 00-0168 Deck Posts *(06 15 13 00-0154)*

See CSI section 06 11 16 00-0105 for treated wood post replacement.

06 15 13 00-0169 Deck Railing And Pickets *(06 15 13 00-0154)*

06 15 13 00-0170	LF	2" x 4" Pressure Treated Deck Railing	2.46	1.31
06 15 13 00-0171	LF	2" x 2" Pressure Treated Deck Railing Picket	1.97	1.00
06 15 13 00-0172	LF	2" x 4" Cedar Deck Railing	3.08	1.31

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 15 13 00-0173	LF	2" x 2" Cedar Deck Railing Picket	2.34	1.00
06 15 13 00-0174	LF	2" x 4" Redwood Deck Railing	3.35	1.31
06 15 13 00-0175	LF	2" x 2" Redwood Deck Railing Picket	2.54	1.00

06 16 Sheathing *(06 10)*

06 16 23 Subflooring *(06 16)*

06 16 23 00-0001 Board Type Subflooring *(06 16 23)*

06 16 23 00-0002	SF	1" x 8" Regular Surface Board Type Subfloor Note: 4 Sides Laid In A Regular Pattern.	3.92	1.14
		For Water Resistant Coating Or Treatment, Add	*0.08*	
		For Foil Backing, Add	*0.13*	
		For Tongue And Groove, Add	*0.09*	
06 16 23 00-0003	SF	1" x 8" Diagonal Surface Board Type Subfloor Note: 4 Sides Laid In A Diagonal Pattern.	4.39	1.44
		For Water Resistant Coating Or Treatment, Add	*0.08*	
		For Foil Backing, Add	*0.14*	
		For Tongue And Groove, Add	*0.09*	
06 16 23 00-0004	SF	1" x 10" Regular Surface Board Type Subfloor Note: 4 sides laid in a regular pattern.	3.76	1.00
		For Water Resistant Coating Or Treatment, Add	*0.08*	
		For Foil Backing, Add	*0.14*	
		For Tongue And Groove, Add	*0.10*	
06 16 23 00-0005	SF	1" x 10" Diagonal Surface Board Type Subfloor Note: 4 sides laid in a diagonal pattern.	4.09	1.14
		For Water Resistant Coating Or Treatment, Add	*0.08*	
		For Foil Backing, Add	*0.14*	
		For Tongue And Groove, Add	*0.10*	

06 16 33 Wood Board Sheathing *(06 16)*

06 16 33 00-0001 Plywood *(06 16 33)*

06 16 33 00-0002 Roof Decking *(06 16 33 00-0001)*

06 16 33 00-0003	SF	3/8" Thick CDX Plywood Roof Decking Note: Applied to wood rafters.	2.37	0.72
		For Shear Wall Construction, Add	*0.34*	
		For Exterior CC Grade Plywood, Add	*0.10*	
		For Application To Metal Studs, Joists, Or Rafters, Add	*0.34*	
		For ACQ Preservative Treatment, Add	*0.33*	
		For Selective Replacement <400 (Includes Removal Of Damaged Plywood And Fitting New Plywood To Size), Add	*2.54*	
		For Fire Retardant Treatment, Add	*0.54*	
		For >1,696 To 3,200, Deduct	*-0.04*	
		For >3,200 To 6,400, Deduct	*-0.06*	
		For >6,400 To 12,800, Deduct	*-0.12*	
		For >12,800, Deduct	*-0.17*	
06 16 33 00-0004	SF	1/2" Thick CDX Plywood Roof Decking Note: Applied to wood rafters.	2.66	0.86
		For Shear Wall Construction, Add	*0.37*	
		For Exterior CC Grade Plywood, Add	*0.12*	
		For Application To Metal Studs, Joists, Or Rafters, Add	*0.37*	
		For ACQ Preservative Treatment, Add	*0.39*	
		For Selective Replacement <400 (Includes Removal Of Damaged Plywood And Fitting New Plywood To Size), Add	*2.76*	
		For Fire Retardant Treatment, Add	*0.65*	
		For >1,696 To 3,200, Deduct	*-0.05*	
		For >3,200 To 6,400, Deduct	*-0.07*	
		For >6,400 To 12,800, Deduct	*-0.14*	
		For >12,800, Deduct	*-0.19*	
06 16 33 00-0005	SF	5/8" Thick CDX Plywood Roof Decking Note: Applied to wood rafters.	3.03	0.86
		For Shear Wall Construction, Add	*0.40*	
		For Exterior CC Grade Plywood, Add	*0.16*	
		For Application To Metal Studs, Joists, Or Rafters, Add	*0.40*	
		For ACQ Preservative Treatment, Add	*0.50*	
		For Selective Replacement <400 (Includes Removal Of Damaged Plywood And Fitting New Plywood To Size), Add	*2.99*	
		For Fire Retardant Treatment, Add	*0.82*	
		For >1,696 To 3,200, Deduct	*-0.06*	
		For >3,200 To 6,400, Deduct	*-0.09*	
		For >6,400 To 12,800, Deduct	*-0.16*	
		For >12,800, Deduct	*-0.22*	
		For Tongue And Groove, Add	*0.07*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 16 33 00-0006	SF	3/4" Thick CDX Plywood Roof Decking	3.36	1.00
		Note: Applied to wood rafters.		
		For Shear Wall Construction, Add	*0.43*	
		For Exterior CC Grade Plywood, Add	*0.18*	
		For Application To Metal Studs, Joists, Or Rafters, Add	*0.43*	
		For ACQ Preservative Treatment, Add	*0.58*	
		For Selective Replacement <400 (Includes Removal Of Damaged Plywood And Fitting New Plywood To Size), Add	*3.23*	
		For Fire Retardant Treatment, Add	*0.96*	
		For >1,696 To 3,200, Deduct	*-0.07*	
		For >3,200 To 6,400, Deduct	*-0.11*	
		For >6,400 To 12,800, Deduct	*-0.19*	
		For >12,800, Deduct	*-0.25*	
		For Tongue And Groove, Add	*0.08*	
06 16 33 00-0007	SF	1" Thick CDX Plywood Roof Decking	3.97	1.14
		Note: Applied to wood rafters.		
		For Shear Wall Construction, Add	*0.47*	
		For Exterior CC Grade Plywood, Add	*0.24*	
		For Application To Metal Studs, Joists, Or Rafters, Add	*0.47*	
		For ACQ Preservative Treatment, Add	*0.78*	
		For Selective Replacement <400 (Includes Removal Of Damaged Plywood And Fitting New Plywood To Size), Add	*3.51*	
		For Fire Retardant Treatment, Add	*1.29*	
		For >1,696 To 3,200, Deduct	*-0.10*	
		For >3,200 To 6,400, Deduct	*-0.15*	
		For >6,400 To 12,800, Deduct	*-0.24*	
		For >12,800, Deduct	*-0.31*	
		For Tongue And Groove, Add	*0.11*	

06 16 33 00-0008 Wall Sheathing *(06 16 33 00-0001)*

06 16 33 00-0009	SF	1/4" Interior BC Plywood Wall Sheathing	2.82	1.00
		Note: Applied to wall studs.		
		For Shear Wall Construction, Add	*0.43*	
		For Exterior CC Grade Plywood, Add	*0.10*	
		For Application To Metal Studs, Joists, Or Rafters, Add	*0.43*	
		For Ceiling Installation, Add	*0.22*	
		For Selective Replacement <400 (Includes Removal Of Damaged Plywood And Fitting New Plywood To Size), Add	*3.23*	
		For Fire Retardant Treatment, Add	*0.53*	
		For >1,696 To 3,200, Deduct	*-0.04*	
		For >3,200 To 6,400, Deduct	*-0.06*	
		For >6,400 To 12,800, Deduct	*-0.13*	
		For >12,800, Deduct	*-0.19*	
06 16 33 00-0010	SF	5/16" Interior BC Plywood Wall Sheathing	2.85	1.00
		Note: Applied to wall studs.		
		For Shear Wall Construction, Add	*0.43*	
		For Exterior CC Grade Plywood, Add	*0.11*	
		For Application To Metal Studs, Joists, Or Rafters, Add	*0.43*	
		For Ceiling Installation, Add	*0.22*	
		For Selective Replacement <400 (Includes Removal Of Damaged Plywood And Fitting New Plywood To Size), Add	*3.23*	
		For Fire Retardant Treatment, Add	*0.55*	
		For >1,696 To 3,200, Deduct	*-0.04*	
		For >3,200 To 6,400, Deduct	*-0.06*	
		For >6,400 To 12,800, Deduct	*-0.13*	
		For >12,800, Deduct	*-0.19*	
06 16 33 00-0011	SF	3/8" Interior BC Plywood Wall Sheathing	2.91	1.14
		Note: Applied to wall studs.		
		For Shear Wall Construction, Add	*0.43*	
		For Exterior CC Grade Plywood, Add	*0.11*	
		For Application To Metal Studs, Joists, Or Rafters, Add	*0.43*	
		For Ceiling Installation, Add	*0.22*	
		For Selective Replacement <400 (Includes Removal Of Damaged Plywood And Fitting New Plywood To Size), Add	*3.23*	
		For Fire Retardant Treatment, Add	*0.60*	
		For >1,696 To 3,200, Deduct	*-0.05*	
		For >3,200 To 6,400, Deduct	*-0.07*	
		For >6,400 To 12,800, Deduct	*-0.14*	
		For >12,800, Deduct	*-0.20*	
06 16 33 00-0012	SF	1/2" Interior BC Plywood Wall Sheathing	3.25	1.14
		Note: Applied to wall studs.		
		For Shear Wall Construction, Add	*0.46*	
		For Exterior CC Grade Plywood, Add	*0.14*	
		For Application To Metal Studs, Joists, Or Rafters, Add	*0.46*	
		For Ceiling Installation, Add	*0.23*	
		For Selective Replacement <400 (Includes Removal Of Damaged Plywood And Fitting New Plywood To Size), Add	*3.44*	
		For Fire Retardant Treatment, Add	*0.76*	
		For >1,696 To 3,200, Deduct	*-0.06*	
		For >3,200 To 6,400, Deduct	*-0.09*	
		For >6,400 To 12,800, Deduct	*-0.16*	
		For >12,800, Deduct	*-0.23*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 16 33 00-0013	SF	5/8" Interior BC Plywood Wall Sheathing Note: Applied to wall studs.	3.65	1.30
		For Shear Wall Construction, Add	*0.49*	
		For Exterior CC Grade Plywood, Add	*0.18*	
		For Application To Metal Studs, Joists, Or Rafters, Add	*0.49*	
		For Ceiling Installation, Add	*0.25*	
		For Selective Replacement <400 (Includes Removal Of Damaged Plywood And Fitting New Plywood To Size), Add	*3.69*	
		For Fire Retardant Treatment, Add	*0.94*	
		For >1,696 To 3,200, Deduct	*-0.07*	
		For >3,200 To 6,400, Deduct	*-0.11*	
		For >6,400 To 12,800, Deduct	*-0.19*	
		For >12,800, Deduct	*-0.27*	
06 16 33 00-0014	SF	3/4" Interior BC Plywood Wall Sheathing Note: Applied to wall studs.	4.00	1.44
		For Shear Wall Construction, Add	*0.53*	
		For Exterior CC Grade Plywood, Add	*0.20*	
		For Application To Metal Studs, Joists, Or Rafters, Add	*0.53*	
		For Ceiling Installation, Add	*0.27*	
		For Selective Replacement <400 (Includes Removal Of Damaged Plywood And Fitting New Plywood To Size), Add	*3.98*	
		For Fire Retardant Treatment, Add	*1.07*	
		For >1,696 To 3,200, Deduct	*-0.08*	
		For >3,200 To 6,400, Deduct	*-0.12*	
		For >6,400 To 12,800, Deduct	*-0.21*	
		For >12,800, Deduct	*-0.29*	
06 16 33 00-0015		Floor Decking *(06 16 33 00-0001)* Note: Includes patching of seams and all fastener holes where necessary.		
06 16 33 00-0016	SF	5/16" CD Grade Plywood Floor Decking Note: Applied to floor or joists.	2.14	0.86
		For Selective Replacement <400 (Includes Removal Of Damaged Plywood And Fitting New Plywood To Size), Add	*2.43*	
		For Fire Retardant Treatment, Add	*0.41*	
		For >1,696 To 3,200, Deduct	*-0.03*	
		For >3,200 To 6,400, Deduct	*-0.05*	
		For >6,400 To 12,800, Deduct	*-0.10*	
		For >12,800, Deduct	*-0.14*	
		For ACQ Preservative Treatment, Add	*0.25*	
		For Fir Plywood, Add	*0.10*	
		For BC Grade Plywood, Add	*0.08*	
		For Exterior Glue, Add	*0.05*	
		For Marine Grade, Add	*0.41*	
06 16 33 00-0017	SF	3/8" CD Grade Plywood Floor Decking Note: Applied to floor or joists.	2.25	0.86
		For Selective Replacement <400 (Includes Removal Of Damaged Plywood And Fitting New Plywood To Size), Add	*2.55*	
		For Fire Retardant Treatment, Add	*0.43*	
		For >1,696 To 3,200, Deduct	*-0.03*	
		For >3,200 To 6,400, Deduct	*-0.05*	
		For >6,400 To 12,800, Deduct	*-0.10*	
		For >12,800, Deduct	*-0.15*	
		For ACQ Preservative Treatment, Add	*0.26*	
		For Fir Plywood, Add	*0.10*	
		For BC Grade Plywood, Add	*0.08*	
		For Exterior Glue, Add	*0.05*	
		For Marine Grade, Add	*0.43*	
06 16 33 00-0018	SF	1/2" CD Grade Plywood Floor Decking Note: Applied to floor or joists.	2.52	0.86
		For Selective Replacement <400 (Includes Removal Of Damaged Plywood And Fitting New Plywood To Size), Add	*2.69*	
		For Fire Retardant Treatment, Add	*0.58*	
		For >1,696 To 3,200, Deduct	*-0.04*	
		For >3,200 To 6,400, Deduct	*-0.07*	
		For >6,400 To 12,800, Deduct	*-0.13*	
		For >12,800, Deduct	*-0.18*	
		For ACQ Preservative Treatment, Add	*0.35*	
		For Fir Plywood, Add	*0.14*	
		For BC Grade Plywood, Add	*0.11*	
		For Exterior Glue, Add	*0.07*	
		For Marine Grade, Add	*0.57*	
06 16 33 00-0019	SF	5/8" CD Grade Plywood Floor Decking Note: Applied to floor or joists.	2.85	0.86
		For Selective Replacement <400 (Includes Removal Of Damaged Plywood And Fitting New Plywood To Size), Add	*2.93*	
		For Fire Retardant Treatment, Add	*0.71*	
		For >1,696 To 3,200, Deduct	*-0.05*	
		For >3,200 To 6,400, Deduct	*-0.08*	
		For >6,400 To 12,800, Deduct	*-0.15*	
		For >12,800, Deduct	*-0.21*	
		For ACQ Preservative Treatment, Add	*0.43*	
		For Fir Plywood, Add	*0.17*	
		For BC Grade Plywood, Add	*0.13*	
		For Exterior Glue, Add	*0.08*	
		For Marine Grade, Add	*0.70*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 16 33 00-0020	SF	3/4" CD Grade Plywood Floor Decking	3.23	0.86
		Note: Applied to floor or joists.		
		For Selective Replacement <400 (Includes Removal Of Damaged Plywood And Fitting New Plywood To Size), Add	*3.11*	
		For Fire Retardant Treatment, Add	*0.92*	
		For >1,696 To 3,200, Deduct	*-0.07*	
		For >3,200 To 6,400, Deduct	*-0.10*	
		For >6,400 To 12,800, Deduct	*-0.18*	
		For >12,800, Deduct	*-0.24*	
		For ACQ Preservative Treatment, Add	*0.56*	
		For Fir Plywood, Add	*0.21*	
		For BC Grade Plywood, Add	*0.17*	
		For Exterior Glue, Add	*0.11*	
		For Marine Grade, Add	*0.91*	
06 16 33 00-0021	SF	1-1/8" CD Grade Plywood Floor Decking	4.66	1.30
		Note: Applied to floor or joists.		
		For Selective Replacement <400 (Includes Removal Of Damaged Plywood And Fitting New Plywood To Size), Add	*3.71*	
		For Fire Retardant Treatment, Add	*1.73*	
		For >1,696 To 3,200, Deduct	*-0.13*	
		For >3,200 To 6,400, Deduct	*-0.20*	
		For >6,400 To 12,800, Deduct	*-0.30*	
		For >12,800, Deduct	*-0.39*	
		For ACQ Preservative Treatment, Add	*1.05*	
		For Fir Plywood, Add	*0.41*	
		For BC Grade Plywood, Add	*0.32*	
		For Exterior Glue, Add	*0.20*	
		For Marine Grade, Add	*1.71*	
06 16 33 00-0022	SF	1/2" AC Fir Plywood Floor Decking	2.96	0.86
		Note: Applied to floor or joists.		
		For Selective Replacement <400 (Includes Removal Of Damaged Plywood And Fitting New Plywood To Size), Add	*2.69*	
		For Fire Retardant Treatment, Add	*0.92*	
		For >1,696 To 3,200, Deduct	*-0.07*	
		For >3,200 To 6,400, Deduct	*-0.11*	
		For >6,400 To 12,800, Deduct	*-0.17*	
		For >12,800, Deduct	*-0.23*	
		For ACQ Preservative Treatment, Add	*0.56*	
		For Exterior Glue, Add	*0.11*	
		For Marine Grade, Add	*0.92*	
		For Tongue And Groove, Add	*0.08*	
06 16 33 00-0023	SF	5/8" AC Fir Plywood Floor Decking	3.35	0.86
		Note: Applied to floor or joists.		
		For Selective Replacement <400 (Includes Removal Of Damaged Plywood And Fitting New Plywood To Size), Add	*2.93*	
		For Fire Retardant Treatment, Add	*1.11*	
		For >1,696 To 3,200, Deduct	*-0.08*	
		For >3,200 To 6,400, Deduct	*-0.13*	
		For >6,400 To 12,800, Deduct	*-0.20*	
		For >12,800, Deduct	*-0.27*	
		For ACQ Preservative Treatment, Add	*0.67*	
		For Exterior Glue, Add	*0.13*	
		For Marine Grade, Add	*1.10*	
		For Tongue And Groove, Add	*0.10*	
06 16 33 00-0024	SF	3/4" AC Fir Plywood Floor Decking	3.60	0.86
		Note: Applied to floor or joists.		
		For Selective Replacement <400 (Includes Removal Of Damaged Plywood And Fitting New Plywood To Size), Add	*3.12*	
		For Fire Retardant Treatment, Add	*1.20*	
		For >1,696 To 3,200, Deduct	*-0.09*	
		For >3,200 To 6,400, Deduct	*-0.14*	
		For >6,400 To 12,800, Deduct	*-0.22*	
		For >12,800, Deduct	*-0.29*	
		For ACQ Preservative Treatment, Add	*0.73*	
		For Exterior Glue, Add	*0.14*	
		For Marine Grade, Add	*1.19*	
		For Tongue And Groove, Add	*0.11*	

06 16 33 00-0025 Underlayment Grade *(06 16 33 00-0001)*

Note: Includes patching of seams and all fastener holes where necessary.

06 16 33 00-0026	SF	1/4" Thick Plywood Underlayment BC Grade	2.27	0.86
		For Fire Retardant Treatment, Add	*0.48*	
		For >1,696 To 3,200, Deduct	*-0.04*	
		For >3,200 To 6,400, Deduct	*-0.05*	
		For >6,400 To 12,800, Deduct	*-0.10*	
		For >12,800, Deduct	*-0.16*	
06 16 33 00-0027	SF	3/8" Thick Plywood Underlayment BC Grade	2.42	0.86
		For Fire Retardant Treatment, Add	*0.53*	
		For >1,696 To 3,200, Deduct	*-0.04*	
		For >3,200 To 6,400, Deduct	*-0.06*	
		For >6,400 To 12,800, Deduct	*-0.10*	
		For >12,800, Deduct	*-0.17*	
06 16 33 00-0028	SF	1/2" Thick Plywood Underlayment BC Grade	2.51	1.00
		For Fire Retardant Treatment, Add	*0.58*	
		For >1,696 To 3,200, Deduct	*-0.04*	
		For >3,200 To 6,400, Deduct	*-0.07*	
		For >6,400 To 12,800, Deduct	*-0.11*	
		For >12,800, Deduct	*-0.18*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 16 33 00-0029	SF	5/8" Thick Plywood Underlayment BC Grade	2.85	1.00
		For Fire Retardant Treatment, Add	*0.68*	
		For >1,696 To 3,200, Deduct	*-0.05*	
		For >3,200 To 6,400, Deduct	*-0.08*	
		For >6,400 To 12,800, Deduct	*-0.13*	
		For >12,800, Deduct	*-0.20*	
		For Tongue And Groove, Add	*0.06*	
06 16 33 00-0030	SF	3/4" Thick Plywood Underlayment BC Grade	3.03	1.00
		For Fire Retardant Treatment, Add	*0.82*	
		For >1,696 To 3,200, Deduct	*-0.06*	
		For >3,200 To 6,400, Deduct	*-0.09*	
		For >6,400 To 12,800, Deduct	*-0.14*	
		For >12,800, Deduct	*-0.22*	
		For Tongue And Groove, Add	*0.07*	
06 16 33 00-0031	SF	1-1/8" Thick Plywood Underlayment BC Grade	3.82	1.14
		For Fire Retardant Treatment, Add	*1.26*	
		For >1,696 To 3,200, Deduct	*-0.10*	
		For >3,200 To 6,400, Deduct	*-0.14*	
		For >6,400 To 12,800, Deduct	*-0.20*	
		For >12,800, Deduct	*-0.30*	
		For Tongue And Groove, Add	*0.11*	
06 16 33 00-0032	SF	3/8" Thick CDX Plywood Underlayment Grade	2.57	0.86
		For Fire Retardant Treatment, Add	*0.65*	
		For >1,696 To 3,200, Deduct	*-0.05*	
		For >3,200 To 6,400, Deduct	*-0.07*	
		For >6,400 To 12,800, Deduct	*-0.12*	
		For >12,800, Deduct	*-0.19*	
06 16 33 00-0033	SF	5/8" Thick CDX Plywood Underlayment Grade	3.19	1.00
		For Fire Retardant Treatment, Add	*0.98*	
		For >1,696 To 3,200, Deduct	*-0.07*	
		For >3,200 To 6,400, Deduct	*-0.11*	
		For >6,400 To 12,800, Deduct	*-0.16*	
		For >12,800, Deduct	*-0.25*	
06 16 33 00-0034		Oriented Strand Board *(06 16 33)*		
06 16 33 00-0035		On Roof *(06 16 33 00-0034)*		
06 16 33 00-0036	SF	3/8" Thick Structural Oriented Strand Board (OSB) On Roof	2.04	0.86
		For >1,408 To 3,200, Deduct	*-0.02*	
		For >3,200 To 6,400, Deduct	*-0.03*	
		For >6,400 To 12,800, Deduct	*-0.08*	
		For >12,800, Deduct	*-0.13*	
		For Fire Retardant Treatment, Add	*0.28*	
		For Selective Replacement <400 (Includes Removal Of Damaged OSB And Fitting New OSB To Size), Add	*2.54*	
06 16 33 00-0037	SF	1/2" Thick Structural Oriented Strand Board (OSB) On Roof	2.25	0.86
		For >1,408 To 3,200, Deduct	*-0.02*	
		For >3,200 To 6,400, Deduct	*-0.04*	
		For >6,400 To 12,800, Deduct	*-0.09*	
		For >12,800, Deduct	*-0.14*	
		For Fire Retardant Treatment, Add	*0.32*	
		For Selective Replacement <400 (Includes Removal Of Damaged OSB And Fitting New OSB To Size), Add	*2.76*	
06 16 33 00-0038	SF	5/8" Thick Structural Oriented Strand Board (OSB) On Roof	2.59	1.00
		For >1,408 To 3,200, Deduct	*-0.04*	
		For >3,200 To 6,400, Deduct	*-0.05*	
		For >6,400 To 12,800, Deduct	*-0.12*	
		For >12,800, Deduct	*-0.17*	
		For Fire Retardant Treatment, Add	*0.47*	
		For Selective Replacement <400 (Includes Removal Of Damaged OSB And Fitting New OSB To Size), Add	*2.99*	
06 16 33 00-0039	SF	3/4" Thick Structural Oriented Strand Board (OSB) On Roof	2.95	1.00
		For >1,408 To 3,200, Deduct	*-0.05*	
		For >3,200 To 6,400, Deduct	*-0.07*	
		For >6,400 To 12,800, Deduct	*-0.14*	
		For >12,800, Deduct	*-0.20*	
		For Fire Retardant Treatment, Add	*0.63*	
		For Selective Replacement <400 (Includes Removal Of Damaged OSB And Fitting New OSB To Size), Add	*3.23*	
06 16 33 00-0040		On Walls *(06 16 33 00-0034)*		
06 16 33 00-0041	SF	3/8" Thick Structural Oriented Strand Board (OSB) On Walls	2.50	1.00
		For >1,408 To 3,200, Deduct	*-0.02*	
		For >3,200 To 6,400, Deduct	*-0.03*	
		For >6,400 To 12,800, Deduct	*-0.09*	
		For >12,800, Deduct	*-0.15*	
		For Fire Retardant Treatment, Add	*0.28*	
		For Selective Replacement <400 (Includes Removal Of Damaged OSB And Fitting New OSB To Size), Add	*3.23*	
06 16 33 00-0042	SF	1/2" Thick Structural Oriented Strand Board (OSB) On Walls	2.70	1.14
		For >1,408 To 3,200, Deduct	*-0.02*	
		For >3,200 To 6,400, Deduct	*-0.04*	
		For >6,400 To 12,800, Deduct	*-0.10*	
		For >12,800, Deduct	*-0.16*	
		For Fire Retardant Treatment, Add	*0.32*	
		For Selective Replacement <400 (Includes Removal Of Damaged OSB And Fitting New OSB To Size), Add	*3.44*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 16 33 00-0043	SF	5/8" Thick Structural Oriented Strand Board (OSB) On Walls	3.06	1.30
		For >1,408 To 3,200, Deduct	*-0.04*	
		For >3,200 To 6,400, Deduct	*-0.05*	
		For >6,400 To 12,800, Deduct	*-0.13*	
		For >12,800, Deduct	*-0.20*	
		For Fire Retardant Treatment, Add	*0.47*	
		For Selective Replacement <400 (Includes Removal Of Damaged OSB And Fitting New OSB To Size), Add	*3.69*	
06 16 33 00-0044	SF	3/4" Thick Structural Oriented Strand Board (OSB) On Walls	3.45	1.30
		For >1,408 To 3,200, Deduct	*-0.05*	
		For >3,200 To 6,400, Deduct	*-0.07*	
		For >6,400 To 12,800, Deduct	*-0.15*	
		For >12,800, Deduct	*-0.23*	
		For Fire Retardant Treatment, Add	*0.63*	
		For Selective Replacement <400 (Includes Removal Of Damaged OSB And Fitting New OSB To Size), Add	*3.98*	
06 16 33 00-0045		**On Floors** *(06 16 33 00-0034)*		
		Note: Includes patching of seams and all fastener holes where necessary.		
06 16 33 00-0046	SF	3/8" Thick Structural Oriented Strand Board (OSB) On Floors	2.08	0.86
		For >1,408 To 3,200, Deduct	*-0.02*	
		For >3,200 To 6,400, Deduct	*-0.03*	
		For >6,400 To 12,800, Deduct	*-0.08*	
		For >12,800, Deduct	*-0.13*	
		For Fire Retardant Treatment, Add	*0.28*	
		For Selective Replacement <400 (Includes Removal Of Damaged OSB And Fitting New OSB To Size), Add	*2.60*	
06 16 33 00-0047	SF	1/2" Thick Structural Oriented Strand Board (OSB) On Floors	2.48	1.00
		For >1,408 To 3,200, Deduct	*-0.02*	
		For >3,200 To 6,400, Deduct	*-0.04*	
		For >6,400 To 12,800, Deduct	*-0.10*	
		For >12,800, Deduct	*-0.15*	
		For Fire Retardant Treatment, Add	*0.32*	
		For Selective Replacement <400 (Includes Removal Of Damaged OSB And Fitting New OSB To Size), Add	*3.11*	
06 16 33 00-0048	SF	5/8" Thick Structural Oriented Strand Board (OSB) On Floors	2.85	1.14
		For >1,408 To 3,200, Deduct	*-0.04*	
		For >3,200 To 6,400, Deduct	*-0.05*	
		For >6,400 To 12,800, Deduct	*-0.12*	
		For >12,800, Deduct	*-0.18*	
		For Fire Retardant Treatment, Add	*0.47*	
		For Selective Replacement <400 (Includes Removal Of Damaged OSB And Fitting New OSB To Size), Add	*3.38*	
06 16 33 00-0049	SF	3/4" Thick Structural Oriented Strand Board (OSB) On Floors	3.26	1.30
		For >1,408 To 3,200, Deduct	*-0.05*	
		For >3,200 To 6,400, Deduct	*-0.07*	
		For >6,400 To 12,800, Deduct	*-0.15*	
		For >12,800, Deduct	*-0.22*	
		For Fire Retardant Treatment, Add	*0.63*	
		For Selective Replacement <400 (Includes Removal Of Damaged OSB And Fitting New OSB To Size), Add	*3.69*	
06 16 33 00-0050		**Particle Board** *(06 16 33)*		
06 16 33 00-0051		**Particle Board Floor Decking** *(06 16 33 00-0050)*		
		Note: Includes patching of seams and all fastener holes where necessary.		
06 16 33 00-0052	SF	3/8" Particle Board Floor Decking	2.34	0.72
		Note: Applied to plywood subfloor.		
		For Fire Retardant Treatment Add	*0.51*	
		For >1,536 To 3,200, Deduct	*-0.04*	
		For >3,200 To 6,400, Deduct	*-0.06*	
		For >6,400 To 12,800, Deduct	*-0.11*	
		For >12,800, Deduct	*-0.16*	
		For Tongue And Groove, Add	*0.05*	
06 16 33 00-0053	SF	1/2" Particle Board Floor Decking	2.67	0.72
		Note: Applied to plywood subfloor.		
		For Fire Retardant Treatment Add	*0.70*	
		For >1,536 To 3,200, Deduct	*-0.05*	
		For >3,200 To 6,400, Deduct	*-0.08*	
		For >6,400 To 12,800, Deduct	*-0.14*	
		For >12,800, Deduct	*-0.20*	
		For Tongue And Groove, Add	*0.06*	
06 16 33 00-0054	SF	5/8" Particle Board Floor Decking	3.00	0.86
		Note: Applied to plywood subfloor.		
		For Fire Retardant Treatment Add	*0.88*	
		For >1,536 To 3,200, Deduct	*-0.07*	
		For >3,200 To 6,400, Deduct	*-0.10*	
		For >6,400 To 12,800, Deduct	*-0.17*	
		For >12,800, Deduct	*-0.23*	
		For Tongue And Groove, Add	*0.08*	
06 16 33 00-0055	SF	3/4" Particle Board Floor Decking	3.31	0.86
		Note: Applied to plywood subfloor.		
		For Fire Retardant Treatment Add	*1.03*	
		For >1,536 To 3,200, Deduct	*-0.08*	
		For >3,200 To 6,400, Deduct	*-0.12*	
		For >6,400 To 12,800, Deduct	*-0.19*	
		For >12,800, Deduct	*-0.26*	
		For Tongue And Groove, Add	*0.09*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
06 16 43		**Gypsum Sheathing** *(06 16)*		
06 16 43 00-0001		Exterior Gypsum Sheathing *(06 16 43)* Note: Includes moisture resistant core and fiberglass mats on both sides and long edges.		
06 16 43 00-0002	SF	1/2" Exterior Gypsum Sheathing (GP Dens-Glass Gold)	3.73	1.14
		For Application To Metal Studs, Joists, Or Rafters, Add	*0.46*	
		For Ceiling Installation, Add	*0.23*	
		For >1,696 To 3,200, Deduct	*-0.09*	
		For >3,200 To 6,400, Deduct	*-0.13*	
		For >6,400 To 12,800, Deduct	*-0.22*	
		For >12,800, Deduct	*-0.29*	
		For Selective Replacement <400 (Includes Removal Of Damaged Gypsum And Fitting New Gypsum To Size), Add	*3.44*	
06 16 43 00-0003	SF	5/8" Exterior Gypsum Sheathing (GP Dens-Glass Gold)	4.02	1.44
		For Application To Metal Studs, Joists, Or Rafters, Add	*0.49*	
		For Ceiling Installation, Add	*0.25*	
		For >1,696 To 3,200, Deduct	*-0.09*	
		For >3,200 To 6,400, Deduct	*-0.14*	
		For >6,400 To 12,800, Deduct	*-0.23*	
		For >12,800, Deduct	*-0.31*	
		For Selective Replacement <400 (Includes Removal Of Damaged Gypsum And Fitting New Gypsum To Size), Add	*3.69*	

END OF SECTION 06

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

07 Thermal And Moisture Protection

07 60 Flashing and Sheet Metal *(07)*

07 62 Sheet Metal Flashing and Trim *(07 60)*

07 62 13 Fabricated Copings *(07 62)*

07 62 13 00-0001 Lead Flashing And Trim *(07 62 13)*

07 62 13 00-0002	SF	2.5 Lb./SF, Sheet Lead Flashing	25.01	6.00
		For Up To 100, Add	*6.25*	
07 62 13 00-0003	SF	4 Lb./SF, Sheet Lead Flashing	32.72	6.00
		For Up To 100, Add	*8.18*	

07 62 13 00-0004 Copper Flashing And Trim *(07 62 13)*

07 62 13 00-0005 Copper Flashing And Trim *(07 62 13 00-0004)*

07 62 13 00-0006	SF	16 Ounce, 0.021" Thick, Copper Flashing And Trim	29.29	5.86
		For Up To 100, Add	*7.32*	
		For >500 To 2,000, Deduct	*-4.04*	
		For >2,000, Deduct	*-4.92*	
		For Copper Valley For Steep Slope Roofing, Over 7 To 12, Add	*2.32*	
		For Wrap Around Window Panning, Add	*11.59*	
07 62 13 00-0007	SF	20 Ounce, 0.027" Thick, Copper Flashing And Trim	30.25	6.00
		For Up To 100, Add	*7.56*	
		For >500 To 2,000, Deduct	*-4.17*	
		For >2,000, Deduct	*-5.08*	
		For Copper Valley For Steep Slope Roofing, Over 7 To 12, Add	*2.42*	
		For Wrap Around Window Panning, Add	*12.11*	
07 62 13 00-0008	SF	24 Ounce, 0.032" Thick, Copper Flashing And Trim	34.47	6.40
		For Up To 100, Add	*8.62*	
		For >500 To 2,000, Deduct	*-4.74*	
		For >2,000, Deduct	*-5.82*	
		For Copper Valley For Steep Slope Roofing, Over 7 To 12, Add	*2.54*	
		For Wrap Around Window Panning, Add	*12.70*	
07 62 13 00-0009	SF	32 Ounce, 0.043" Thick, Copper Flashing And Trim	42.35	6.66
		For Up To 100, Add	*10.59*	
		For >500 To 2,000, Deduct	*-5.77*	
		For >2,000, Deduct	*-7.22*	
		For Copper Valley For Steep Slope Roofing, Over 7 To 12, Add	*2.67*	
		For Wrap Around Window Panning, Add	*13.33*	

07 62 13 00-0010 Stainless Steel Flashing And Trim *(07 62 13)*

07 62 13 00-0011 Stainless Steel Flashing And Trim *(07 62 13 00-0010)*

07 62 13 00-0012	SF	32 Gauge, 0.010" Thick, Stainless Steel Flashing And Trim	11.81	3.20
		For Up To 100, Add	*2.95*	
		For Wrap Around Window Panning, Add	*8.23*	
		For Mechanically Keyed Flashing, Add	*1.43*	
07 62 13 00-0013	SF	30 Gauge, 0.0125" Thick, Stainless Steel Flashing And Trim	12.83	3.60
		For Up To 100, Add	*3.21*	
		For Wrap Around Window Panning, Add	*8.36*	
		For Mechanically Keyed Flashing, Add	*1.79*	
07 62 13 00-0014	SF	28 Gauge, 0.0156" Thick, Stainless Steel Flashing And Trim	13.85	3.99
		For Up To 100, Add	*3.46*	
		For Wrap Around Window Panning, Add	*8.49*	
		For Mechanically Keyed Flashing, Add	*2.14*	
07 62 13 00-0015	SF	26 Gauge, 0.0187" Thick, Stainless Steel Flashing And Trim	15.47	4.40
		For Up To 100, Add	*3.87*	
		For Wrap Around Window Panning, Add	*8.77*	
		For Mechanically Keyed Flashing, Add	*2.68*	
07 62 13 00-0016	SF	24 Gauge, 0.025" Thick, Stainless Steel Flashing And Trim	18.19	4.67
		For Up To 100, Add	*4.55*	
		For Wrap Around Window Panning, Add	*9.26*	
		For Mechanically Keyed Flashing, Add	*3.57*	
07 62 13 00-0017	SF	22 Gauge, 0.031" Thick, Stainless Steel Flashing And Trim	19.88	4.90
		For Up To 100, Add	*4.97*	
		For Wrap Around Window Panning, Add	*9.80*	
		For Mechanically Keyed Flashing, Add	*4.03*	
07 62 13 00-0018	SF	20 Gauge, 0.0375" Thick, Stainless Steel Flashing And Trim	21.29	5.20
		For Up To 100, Add	*5.32*	
		For Wrap Around Window Panning, Add	*10.37*	
		For Mechanically Keyed Flashing, Add	*4.37*	

07 62 13 00-0019 Aluminum Flashing And Trim *(07 62 13)*

07 62 13 00-0020 Aluminum Flashing And Trim *(07 62 13 00-0019)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
07 62 13 00-0021	SF	0.013" Thick, Mill Finish, Aluminum Flashing And Trim	13.51	4.13
		For Up To 100, Add	*3.38*	
		For Baked Aluminum Colors, Add	*0.43*	
		For Wrap Around Window Panning, Add	*9.19*	
07 62 13 00-0022	SF	0.016" Thick, Mill Finish, Aluminum Flashing And Trim	14.45	4.13
		For Up To 100, Add	*3.61*	
		For Baked Aluminum Colors, Add	*0.53*	
		For Wrap Around Window Panning, Add	*9.19*	
07 62 13 00-0023	SF	0.019" Thick, Mill Finish, Aluminum Flashing And Trim	15.20	4.13
		For Up To 100, Add	*3.80*	
		For Baked Aluminum Colors, Add	*0.60*	
		For Wrap Around Window Panning, Add	*9.19*	
07 62 13 00-0024	SF	0.024" Thick, Mill Finish, Aluminum Flashing And Trim	16.28	4.13
		For Up To 100, Add	*4.07*	
		For Baked Aluminum Colors, Add	*0.71*	
		For Wrap Around Window Panning, Add	*9.19*	
07 62 13 00-0025	SF	0.032" Thick, Mill Finish, Aluminum Flashing And Trim	17.79	4.13
		For Up To 100, Add	*4.45*	
		For Baked Aluminum Colors, Add	*0.86*	
		For Wrap Around Window Panning, Add	*9.19*	
07 62 13 00-0026	SF	0.040" Thick, Mill Finish, Aluminum Flashing And Trim	18.72	4.13
		For Up To 100, Add	*4.68*	
		For Baked Aluminum Colors, Add	*0.95*	
		For Wrap Around Window Panning, Add	*9.19*	
07 62 13 00-0027	SF	0.050" Thick, Mill Finish, Aluminum Flashing And Trim	19.47	4.13
		For Up To 100, Add	*4.87*	
		For Baked Aluminum Colors, Add	*1.03*	
		For Wrap Around Window Panning, Add	*9.19*	

07 62 13 00-0028 Steel Flashing And Trim *(07 62 13)*

07 62 13 00-0029 Galvanized Steel Flashing And Trim *(07 62 13 00-0028)*

07 62 13 00-0030	SF	28 Gauge, 0.019" Thick, Galvanized Steel Flashing	13.14	3.99
		For Up To 100, Add	*3.29*	
		For Wrap Around Window Panning, Add	*8.49*	
07 62 13 00-0031	SF	26 Gauge, 0.022" Thick, Galvanized Steel Flashing	13.67	4.40
		For Up To 100, Add	*3.42*	
		For Wrap Around Window Panning, Add	*8.77*	
07 62 13 00-0032	SF	24 Gauge, 0.028" Thick, Galvanized Steel Flashing	14.55	4.67
		For Up To 100, Add	*3.64*	
		For Wrap Around Window Panning, Add	*9.26*	
07 62 13 00-0033	SF	22 Gauge, 0.034" Thick, Galvanized Steel Flashing	15.47	4.90
		For Up To 100, Add	*3.87*	
		For Wrap Around Window Panning, Add	*9.80*	
07 62 13 00-0034	SF	20 Gauge, 0.04" Thick, Galvanized Steel Flashing	16.72	5.20
		For Up To 100, Add	*4.18*	
		For Wrap Around Window Panning, Add	*10.37*	

07 62 19 Fabricated Gravel Stops and Fasciae *(07 62)*

07 62 19 00-0001 Drip Edge *(07 62 19)*

07 62 19 00-0002 Aluminum Drip Edge *(07 62 19 00-0001)*
Note: Girth (stretch-out) equals the total (flattened) width of the drip edge.

07 62 19 00-0003 KYNAR 500® Finish, Aluminum Drip Edge *(07 62 19 00-0002)*

07 62 19 00-0004 0.016" Thick, KYNAR 500® Finish, Aluminum Drip Edge *(07 62 19 00-0003)*

07 62 19 00-0005	LF	Up To 5" Girth, 0.016" Thick, KYNAR 500® Finish, Aluminum Drip Edge	14.45	2.08
07 62 19 00-0006	LF	>5" To 7" Girth, 0.016" Thick, KYNAR 500® Finish, Aluminum Drip Edge	17.95	2.22
07 62 19 00-0007	LF	>7" To 9" Girth, 0.016" Thick, KYNAR 500® Finish, Aluminum Drip Edge	20.27	2.49
07 62 19 00-0008	LF	>9" To 12" Girth, 0.016" Thick, KYNAR 500® Finish, Aluminum Drip Edge	24.33	2.63
07 62 19 00-0009	LF	>12" To 15" Girth, 0.016" Thick, KYNAR 500® Finish, Aluminum Drip Edge	31.00	2.76

07 62 19 00-0010 0.019" Thick, KYNAR 500® Finish, Aluminum Drip Edge *(07 62 19 00-0003)*

07 62 19 00-0011	LF	Up To 5" Girth, 0.019" Thick, KYNAR 500® Finish, Aluminum Drip Edge	15.44	2.08
07 62 19 00-0012	LF	>5" To 7" Girth, 0.019" Thick, KYNAR 500® Finish, Aluminum Drip Edge	19.05	2.22
07 62 19 00-0013	LF	>7" To 9" Girth, 0.019" Thick, KYNAR 500® Finish, Aluminum Drip Edge	21.91	2.49
07 62 19 00-0014	LF	>9" To 12" Girth, 0.019" Thick, KYNAR 500® Finish, Aluminum Drip Edge	26.30	2.63
07 62 19 00-0015	LF	>12" To 15" Girth, 0.019" Thick, KYNAR 500® Finish, Aluminum Drip Edge	32.86	2.76

07 62 19 00-0016 0.025" Thick, KYNAR 500® Finish, Aluminum Drip Edge *(07 62 19 00-0003)*

07 62 19 00-0017	LF	Up To 5" Girth, 0.025" Thick, KYNAR 500® Finish, Aluminum Drip Edge	16.43	2.08
07 62 19 00-0018	LF	>5" To 7" Girth, 0.025" Thick, KYNAR 500® Finish, Aluminum Drip Edge	20.37	2.22
07 62 19 00-0019	LF	>7" To 9" Girth, 0.025" Thick, KYNAR 500® Finish, Aluminum Drip Edge	23.50	2.49
07 62 19 00-0020	LF	>9" To 12" Girth, 0.025" Thick, KYNAR 500® Finish, Aluminum Drip Edge	28.28	2.63
07 62 19 00-0021	LF	>12" To 15" Girth, 0.025" Thick, KYNAR 500® Finish, Aluminum Drip Edge	35.49	2.76

07 62 19 00-0022 0.032" Thick, KYNAR 500® Finish, Aluminum Drip Edge *(07 62 19 00-0003)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
07 62 19 00-0023	LF	Up To 5" Girth, 0.032" Thick, KYNAR 500® Finish, Aluminum Drip Edge	18.40	2.08
07 62 19 00-0024	LF	>5" To 7" Girth, 0.032" Thick, KYNAR 500® Finish, Aluminum Drip Edge	23.00	2.22
07 62 19 00-0025	LF	>7" To 9" Girth, 0.032" Thick, KYNAR 500® Finish, Aluminum Drip Edge	26.63	2.49
07 62 19 00-0026	LF	>9" To 12" Girth, 0.032" Thick, KYNAR 500® Finish, Aluminum Drip Edge	32.22	2.63
07 62 19 00-0027	LF	>12" To 15" Girth, 0.032" Thick, KYNAR 500® Finish, Aluminum Drip Edge	40.76	2.76
07 62 19 00-0028		0.040" Thick, KYNAR 500® Finish, Aluminum Drip Edge *(07 62 19 00-0003)*		
07 62 19 00-0029	LF	Up To 5" Girth, 0.040" Thick, KYNAR 500® Finish, Aluminum Drip Edge	19.06	2.08
07 62 19 00-0030	LF	>5" To 7" Girth, 0.040" Thick, KYNAR 500® Finish, Aluminum Drip Edge	23.99	2.22
07 62 19 00-0031	LF	>7" To 9" Girth, 0.040" Thick, KYNAR 500® Finish, Aluminum Drip Edge	27.67	2.49
07 62 19 00-0032	LF	>9" To 12" Girth, 0.040" Thick, KYNAR 500® Finish, Aluminum Drip Edge	33.54	2.63
07 62 19 00-0033	LF	>12" To 15" Girth, 0.040" Thick, KYNAR 500® Finish, Aluminum Drip Edge	42.51	2.76
07 62 19 00-0034		0.050" Thick, KYNAR 500® Finish, Aluminum Drip Edge *(07 62 19 00-0003)*		
07 62 19 00-0035	LF	Up To 5" Girth, 0.050" Thick, KYNAR 500® Finish, Aluminum Drip Edge	21.36	2.08
07 62 19 00-0036	LF	>5" To 7" Girth, 0.050" Thick, KYNAR 500® Finish, Aluminum Drip Edge	26.95	2.22
07 62 19 00-0037	LF	>7" To 9" Girth, 0.050" Thick, KYNAR 500® Finish, Aluminum Drip Edge	31.29	2.49
07 62 19 00-0038	LF	>9" To 12" Girth, 0.050" Thick, KYNAR 500® Finish, Aluminum Drip Edge	38.14	2.63
07 62 19 00-0039	LF	>12" To 15" Girth, 0.050" Thick, KYNAR 500® Finish, Aluminum Drip Edge	48.65	2.76
07 62 19 00-0040		0.063" Thick, KYNAR 500® Finish, Aluminum Drip Edge *(07 62 19 00-0003)*		
07 62 19 00-0041	LF	Up To 5" Girth, 0.063" Thick, KYNAR 500® Finish, Aluminum Drip Edge	24.65	2.08
07 62 19 00-0042	LF	>5" To 7" Girth, 0.063" Thick, KYNAR 500® Finish, Aluminum Drip Edge	31.33	2.22
07 62 19 00-0043	LF	>7" To 9" Girth, 0.063" Thick, KYNAR 500® Finish, Aluminum Drip Edge	36.50	2.49
07 62 19 00-0044	LF	>9" To 12" Girth, 0.063" Thick, KYNAR 500® Finish, Aluminum Drip Edge	44.72	2.63
07 62 19 00-0045	LF	>12" To 15" Girth, 0.063" Thick, KYNAR 500® Finish, Aluminum Drip Edge	57.43	2.76
07 62 19 00-0046		0.080" Thick, KYNAR 500® Finish, Aluminum Drip Edge *(07 62 19 00-0003)*		
07 62 19 00-0047	LF	Up To 5" Girth, 0.080" Thick, KYNAR 500® Finish, Aluminum Drip Edge	28.60	2.08
07 62 19 00-0048	LF	>5" To 7" Girth, 0.080" Thick, KYNAR 500® Finish, Aluminum Drip Edge	36.60	2.22
07 62 19 00-0049	LF	>7" To 9" Girth, 0.080" Thick, KYNAR 500® Finish, Aluminum Drip Edge	42.75	2.49
07 62 19 00-0050	LF	>9" To 12" Girth, 0.080" Thick, KYNAR 500® Finish, Aluminum Drip Edge	52.62	2.63
07 62 19 00-0051	LF	>12" To 15" Girth, 0.080" Thick, KYNAR 500® Finish, Aluminum Drip Edge	67.95	2.76
07 62 19 00-0052		Mill Finish, Aluminum Drip Edge *(07 62 19 00-0002)*		
07 62 19 00-0053		0.016" Thick, Mill Finish, Aluminum Drip Edge *(07 62 19 00-0052)*		
07 62 19 00-0054	LF	Up To 5" Girth, 0.016" Thick, Mill Finish, Aluminum Drip Edge	11.90	2.08
07 62 19 00-0055	LF	>5" To 7" Girth, 0.016" Thick, Mill Finish, Aluminum Drip Edge	14.48	2.22
07 62 19 00-0056	LF	>7" To 9" Girth, 0.016" Thick, Mill Finish, Aluminum Drip Edge	16.25	2.49
07 62 19 00-0057	LF	>9" To 12" Girth, 0.016" Thick, Mill Finish, Aluminum Drip Edge	19.22	2.63
07 62 19 00-0058	LF	>12" To 15" Girth, 0.016" Thick, Mill Finish, Aluminum Drip Edge	23.95	2.76
07 62 19 00-0059		0.019" Thick, Mill Finish, Aluminum Drip Edge *(07 62 19 00-0052)*		
07 62 19 00-0060	LF	Up To 5" Girth, 0.019" Thick, Mill Finish, Aluminum Drip Edge	12.58	2.08
07 62 19 00-0061	LF	>5" To 7" Girth, 0.019" Thick, Mill Finish, Aluminum Drip Edge	15.24	2.22
07 62 19 00-0062	LF	>7" To 9" Girth, 0.019" Thick, Mill Finish, Aluminum Drip Edge	17.39	2.49
07 62 19 00-0063	LF	>9" To 12" Girth, 0.019" Thick, Mill Finish, Aluminum Drip Edge	20.58	2.63
07 62 19 00-0064	LF	>12" To 15" Girth, 0.019" Thick, Mill Finish, Aluminum Drip Edge	25.24	2.76
07 62 19 00-0065		0.025" Thick, Mill Finish, Aluminum Drip Edge *(07 62 19 00-0052)*		
07 62 19 00-0066	LF	Up To 5" Girth, 0.025" Thick, Mill Finish, Aluminum Drip Edge	13.26	2.08
07 62 19 00-0067	LF	>5" To 7" Girth, 0.025" Thick, Mill Finish, Aluminum Drip Edge	16.15	2.22
07 62 19 00-0068	LF	>7" To 9" Girth, 0.025" Thick, Mill Finish, Aluminum Drip Edge	18.48	2.49
07 62 19 00-0069	LF	>9" To 12" Girth, 0.025" Thick, Mill Finish, Aluminum Drip Edge	21.95	2.63
07 62 19 00-0070	LF	>12" To 15" Girth, 0.025" Thick, Mill Finish, Aluminum Drip Edge	27.05	2.76
07 62 19 00-0071		0.032" Thick, Mill Finish, Aluminum Drip Edge *(07 62 19 00-0052)*		
07 62 19 00-0072	LF	Up To 5" Girth, 0.032" Thick, Mill Finish, Aluminum Drip Edge	14.62	2.08
07 62 19 00-0073	LF	>5" To 7" Girth, 0.032" Thick, Mill Finish, Aluminum Drip Edge	17.96	2.22
07 62 19 00-0074	LF	>7" To 9" Girth, 0.032" Thick, Mill Finish, Aluminum Drip Edge	20.64	2.49
07 62 19 00-0075	LF	>9" To 12" Girth, 0.032" Thick, Mill Finish, Aluminum Drip Edge	24.67	2.63
07 62 19 00-0076	LF	>12" To 15" Girth, 0.032" Thick, Mill Finish, Aluminum Drip Edge	30.68	2.76
07 62 19 00-0077		0.040" Thick, Mill Finish, Aluminum Drip Edge *(07 62 19 00-0052)*		
07 62 19 00-0078	LF	Up To 5" Girth, 0.040" Thick, Mill Finish, Aluminum Drip Edge	15.08	2.08
07 62 19 00-0079	LF	>5" To 7" Girth, 0.040" Thick, Mill Finish, Aluminum Drip Edge	18.64	2.22
07 62 19 00-0080	LF	>7" To 9" Girth, 0.040" Thick, Mill Finish, Aluminum Drip Edge	21.36	2.49
07 62 19 00-0081	LF	>9" To 12" Girth, 0.040" Thick, Mill Finish, Aluminum Drip Edge	25.58	2.63
07 62 19 00-0082	LF	>12" To 15" Girth, 0.040" Thick, Mill Finish, Aluminum Drip Edge	31.89	2.76

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
07 62 19 00-0083		**0.050" Thick, Mill Finish, Aluminum Drip Edge** *(07 62 19 00-0052)*		
07 62 19 00-0084	LF	Up To 5" Girth, 0.050" Thick, Mill Finish, Aluminum Drip Edge	16.67	2.08
07 62 19 00-0085	LF	>5" To 7" Girth, 0.050" Thick, Mill Finish, Aluminum Drip Edge	20.68	2.22
07 62 19 00-0086	LF	>7" To 9" Girth, 0.050" Thick, Mill Finish, Aluminum Drip Edge	23.85	2.49
07 62 19 00-0087	LF	>9" To 12" Girth, 0.050" Thick, Mill Finish, Aluminum Drip Edge	28.75	2.63
07 62 19 00-0088	LF	>12" To 15" Girth, 0.050" Thick, Mill Finish, Aluminum Drip Edge	36.13	2.76
07 62 19 00-0089		**0.063" Thick, Mill Finish, Aluminum Drip Edge** *(07 62 19 00-0052)*		
07 62 19 00-0090	LF	Up To 5" Girth, 0.063" Thick, Mill Finish, Aluminum Drip Edge	18.93	2.08
07 62 19 00-0091	LF	>5" To 7" Girth, 0.063" Thick, Mill Finish, Aluminum Drip Edge	23.71	2.22
07 62 19 00-0092	LF	>7" To 9" Girth, 0.063" Thick, Mill Finish, Aluminum Drip Edge	27.45	2.49
07 62 19 00-0093	LF	>9" To 12" Girth, 0.063" Thick, Mill Finish, Aluminum Drip Edge	33.29	2.63
07 62 19 00-0094	LF	>12" To 15" Girth, 0.063" Thick, Mill Finish, Aluminum Drip Edge	42.18	2.76
07 62 19 00-0095		**0.080" Thick, Mill Finish, Aluminum Drip Edge** *(07 62 19 00-0052)*		
07 62 19 00-0096	LF	Up To 5" Girth, 0.080" Thick, Mill Finish, Aluminum Drip Edge	21.66	2.08
07 62 19 00-0097	LF	>5" To 7" Girth, 0.080" Thick, Mill Finish, Aluminum Drip Edge	27.34	2.22
07 62 19 00-0098	LF	>7" To 9" Girth, 0.080" Thick, Mill Finish, Aluminum Drip Edge	31.76	2.49
07 62 19 00-0099	LF	>9" To 12" Girth, 0.080" Thick, Mill Finish, Aluminum Drip Edge	38.73	2.63
07 62 19 00-0100	LF	>12" To 15" Girth, 0.080" Thick, Mill Finish, Aluminum Drip Edge	49.44	2.76
07 62 19 00-0101		**Clear Anodized Finish, Aluminum Drip Edge** *(07 62 19 00-0002)*		
07 62 19 00-0102		**0.016" Thick, Clear Anodized Finish, Aluminum Drip Edge** *(07 62 19 00-0101)*		
07 62 19 00-0103	LF	Up To 5" Girth, 0.016" Thick, Clear Anodized Finish, Aluminum Drip Edge	14.95	2.08
07 62 19 00-0104	LF	>5" To 7" Girth, 0.016" Thick, Clear Anodized Finish, Aluminum Drip Edge	18.63	2.22
07 62 19 00-0105	LF	>7" To 9" Girth, 0.016" Thick, Clear Anodized Finish, Aluminum Drip Edge	21.05	2.49
07 62 19 00-0106	LF	>9" To 12" Girth, 0.016" Thick, Clear Anodized Finish, Aluminum Drip Edge	25.32	2.63
07 62 19 00-0107	LF	>12" To 15" Girth, 0.016" Thick, Clear Anodized Finish, Aluminum Drip Edge	32.36	2.76
07 62 19 00-0108		**0.019" Thick, Clear Anodized Finish, Aluminum Drip Edge** *(07 62 19 00-0101)*		
07 62 19 00-0109	LF	Up To 5" Girth, 0.019" Thick, Clear Anodized Finish, Aluminum Drip Edge	15.99	2.08
07 62 19 00-0110	LF	>5" To 7" Girth, 0.019" Thick, Clear Anodized Finish, Aluminum Drip Edge	19.79	2.22
07 62 19 00-0111	LF	>7" To 9" Girth, 0.019" Thick, Clear Anodized Finish, Aluminum Drip Edge	22.79	2.49
07 62 19 00-0112	LF	>9" To 12" Girth, 0.019" Thick, Clear Anodized Finish, Aluminum Drip Edge	27.41	2.63
07 62 19 00-0113	LF	>12" To 15" Girth, 0.019" Thick, Clear Anodized Finish, Aluminum Drip Edge	34.34	2.76
07 62 19 00-0114		**0.025" Thick, Clear Anodized Finish, Aluminum Drip Edge** *(07 62 19 00-0101)*		
07 62 19 00-0115	LF	Up To 5" Girth, 0.025" Thick, Clear Anodized Finish, Aluminum Drip Edge	17.04	2.08
07 62 19 00-0116	LF	>5" To 7" Girth, 0.025" Thick, Clear Anodized Finish, Aluminum Drip Edge	21.18	2.22
07 62 19 00-0117	LF	>7" To 9" Girth, 0.025" Thick, Clear Anodized Finish, Aluminum Drip Edge	24.47	2.49
07 62 19 00-0118	LF	>9" To 12" Girth, 0.025" Thick, Clear Anodized Finish, Aluminum Drip Edge	29.50	2.63
07 62 19 00-0119	LF	>12" To 15" Girth, 0.025" Thick, Clear Anodized Finish, Aluminum Drip Edge	37.13	2.76
07 62 19 00-0120		**0.032" Thick, Clear Anodized Finish, Aluminum Drip Edge** *(07 62 19 00-0101)*		
07 62 19 00-0121	LF	Up To 5" Girth, 0.032" Thick, Clear Anodized Finish, Aluminum Drip Edge	19.13	2.08
07 62 19 00-0122	LF	>5" To 7" Girth, 0.032" Thick, Clear Anodized Finish, Aluminum Drip Edge	23.97	2.22
07 62 19 00-0123	LF	>7" To 9" Girth, 0.032" Thick, Clear Anodized Finish, Aluminum Drip Edge	27.79	2.49
07 62 19 00-0124	LF	>9" To 12" Girth, 0.032" Thick, Clear Anodized Finish, Aluminum Drip Edge	33.68	2.63
07 62 19 00-0125	LF	>12" To 15" Girth, 0.032" Thick, Clear Anodized Finish, Aluminum Drip Edge	42.71	2.76
07 62 19 00-0126		**0.040" Thick, Clear Anodized Finish, Aluminum Drip Edge** *(07 62 19 00-0101)*		
07 62 19 00-0127	LF	Up To 5" Girth, 0.040" Thick, Clear Anodized Finish, Aluminum Drip Edge	19.83	2.08
07 62 19 00-0128	LF	>5" To 7" Girth, 0.040" Thick, Clear Anodized Finish, Aluminum Drip Edge	25.02	2.22
07 62 19 00-0129	LF	>7" To 9" Girth, 0.040" Thick, Clear Anodized Finish, Aluminum Drip Edge	28.89	2.49
07 62 19 00-0130	LF	>9" To 12" Girth, 0.040" Thick, Clear Anodized Finish, Aluminum Drip Edge	35.08	2.63
07 62 19 00-0131	LF	>12" To 15" Girth, 0.040" Thick, Clear Anodized Finish, Aluminum Drip Edge	44.56	2.76
07 62 19 00-0132		**0.050" Thick, Clear Anodized Finish, Aluminum Drip Edge** *(07 62 19 00-0101)*		
07 62 19 00-0133	LF	Up To 5" Girth, 0.050" Thick, Clear Anodized Finish, Aluminum Drip Edge	22.27	2.08
07 62 19 00-0134	LF	>5" To 7" Girth, 0.050" Thick, Clear Anodized Finish, Aluminum Drip Edge	28.16	2.22
07 62 19 00-0135	LF	>7" To 9" Girth, 0.050" Thick, Clear Anodized Finish, Aluminum Drip Edge	32.73	2.49
07 62 19 00-0136	LF	>9" To 12" Girth, 0.050" Thick, Clear Anodized Finish, Aluminum Drip Edge	39.96	2.63
07 62 19 00-0137	LF	>12" To 15" Girth, 0.050" Thick, Clear Anodized Finish, Aluminum Drip Edge	51.07	2.76
07 62 19 00-0138		**0.063" Thick, Clear Anodized Finish, Aluminum Drip Edge** *(07 62 19 00-0101)*		
07 62 19 00-0139	LF	Up To 5" Girth, 0.063" Thick, Clear Anodized Finish, Aluminum Drip Edge	25.76	2.08
07 62 19 00-0140	LF	>5" To 7" Girth, 0.063" Thick, Clear Anodized Finish, Aluminum Drip Edge	32.81	2.22

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
07 62 19 00-0141	LF	>7" To 9" Girth, 0.063" Thick, Clear Anodized Finish, Aluminum Drip Edge	38.25	2.49
07 62 19 00-0142	LF	>9" To 12" Girth, 0.063" Thick, Clear Anodized Finish, Aluminum Drip Edge	46.93	2.63
07 62 19 00-0143	LF	>12" To 15" Girth, 0.063" Thick, Clear Anodized Finish, Aluminum Drip Edge	60.37	2.76
07 62 19 00-0144		0.080" Thick, Clear Anodized Finish, Aluminum Drip Edge *(07 62 19 00-0101)*		
07 62 19 00-0145	LF	Up To 5" Girth, 0.080" Thick, Clear Anodized Finish, Aluminum Drip Edge	29.94	2.08
07 62 19 00-0146	LF	>5" To 7" Girth, 0.080" Thick, Clear Anodized Finish, Aluminum Drip Edge	38.39	2.22
07 62 19 00-0147	LF	>7" To 9" Girth, 0.080" Thick, Clear Anodized Finish, Aluminum Drip Edge	44.87	2.49
07 62 19 00-0148	LF	>9" To 12" Girth, 0.080" Thick, Clear Anodized Finish, Aluminum Drip Edge	55.30	2.63
07 62 19 00-0149	LF	>12" To 15" Girth, 0.080" Thick, Clear Anodized Finish, Aluminum Drip Edge	71.53	2.76
07 62 19 00-0150		Galvanized Steel Drip Edge *(07 62 19 00-0001)*		
		Note: Girth (stretch-out) equals the total (flattened) width of the drip edge.		
07 62 19 00-0151		Galvanized Steel Drip Edge *(07 62 19 00-0150)*		
07 62 19 00-0152		26 Gauge, Galvanized Steel Drip Edge *(07 62 19 00-0151)*		
07 62 19 00-0153	LF	Up To 5" Girth, 26 Gauge, Galvanized Steel Drip Edge	13.79	2.08
07 62 19 00-0154	LF	>5" To 7" Girth, 26 Gauge, Galvanized Steel Drip Edge	16.92	2.22
07 62 19 00-0155	LF	>7" To 9" Girth, 26 Gauge, Galvanized Steel Drip Edge	19.32	2.49
07 62 19 00-0156	LF	>9" To 12" Girth, 26 Gauge, Galvanized Steel Drip Edge	23.01	2.63
07 62 19 00-0157	LF	>12" To 15" Girth, 26 Gauge, Galvanized Steel Drip Edge	28.47	2.76
07 62 19 00-0158		24 Gauge, Galvanized Steel Drip Edge *(07 62 19 00-0151)*		
07 62 19 00-0159	LF	Up To 5" Girth, 24 Gauge, Galvanized Steel Drip Edge	14.93	2.08
07 62 19 00-0160	LF	>5" To 7" Girth, 24 Gauge, Galvanized Steel Drip Edge	18.44	2.22
07 62 19 00-0161	LF	>7" To 9" Girth, 24 Gauge, Galvanized Steel Drip Edge	21.12	2.49
07 62 19 00-0162	LF	>9" To 12" Girth, 24 Gauge, Galvanized Steel Drip Edge	25.29	2.63
07 62 19 00-0163	LF	>12" To 15" Girth, 24 Gauge, Galvanized Steel Drip Edge	31.48	2.76
07 62 19 00-0164		KYNAR 500® Finish, Galvanized Steel Drip Edge *(07 62 19 00-0150)*		
07 62 19 00-0165		26 Gauge, KYNAR 500® Finish, Galvanized Steel Drip Edge *(07 62 19 00-0164)*		
07 62 19 00-0166	LF	Up To 5" Girth, 26 Gauge, KYNAR 500® Finish, Galvanized Steel Drip Edge	17.20	2.08
07 62 19 00-0167	LF	>5" To 7" Girth, 26 Gauge, KYNAR 500® Finish, Galvanized Steel Drip Edge	21.49	2.22
07 62 19 00-0168	LF	>7" To 9" Girth, 26 Gauge, KYNAR 500® Finish, Galvanized Steel Drip Edge	24.72	2.49
07 62 19 00-0169	LF	>9" To 12" Girth, 26 Gauge, KYNAR 500® Finish, Galvanized Steel Drip Edge	29.81	2.63
07 62 19 00-0170	LF	>12" To 15" Girth, 26 Gauge, KYNAR 500® Finish, Galvanized Steel Drip Edge	37.54	2.76
07 62 19 00-0171		24 Gauge, KYNAR 500® Finish, Galvanized Steel Drip Edge *(07 62 19 00-0164)*		
07 62 19 00-0172	LF	Up To 5" Girth, 24 Gauge, KYNAR 500® Finish, Galvanized Steel Drip Edge	18.84	2.08
07 62 19 00-0173	LF	>5" To 7" Girth, 24 Gauge, KYNAR 500® Finish, Galvanized Steel Drip Edge	23.69	2.22
07 62 19 00-0174	LF	>7" To 9" Girth, 24 Gauge, KYNAR 500® Finish, Galvanized Steel Drip Edge	27.32	2.49
07 62 19 00-0175	LF	>9" To 12" Girth, 24 Gauge, KYNAR 500® Finish, Galvanized Steel Drip Edge	33.10	2.63
07 62 19 00-0176	LF	>12" To 15" Girth, 24 Gauge, KYNAR 500® Finish, Galvanized Steel Drip Edge	41.93	2.76
07 62 19 00-0177		Stainless Steel Drip Edge *(07 62 19 00-0001)*		
		Note: Girth (stretch-out) equals the total (flattened) width of the drip edge.		
07 62 19 00-0178		26 Gauge, Stainless Steel Drip Edge *(07 62 19 00-0177)*		
07 62 19 00-0179	LF	Up To 5" Girth, 26 Gauge, Stainless Steel Drip Edge	23.47	2.08
07 62 19 00-0180	LF	>5" To 7" Girth, 26 Gauge, Stainless Steel Drip Edge	29.76	2.22
07 62 19 00-0181	LF	>7" To 9" Girth, 26 Gauge, Stainless Steel Drip Edge	34.63	2.49
07 62 19 00-0182	LF	>9" To 12" Girth, 26 Gauge, Stainless Steel Drip Edge	42.37	2.63
07 62 19 00-0183	LF	>12" To 15" Girth, 26 Gauge, Stainless Steel Drip Edge	54.28	2.76
07 62 19 00-0184		24 Gauge, Stainless Steel Drip Edge *(07 62 19 00-0177)*		
07 62 19 00-0185	LF	Up To 5" Girth, 24 Gauge, Stainless Steel Drip Edge	28.90	2.08
07 62 19 00-0186	LF	>5" To 7" Girth, 24 Gauge, Stainless Steel Drip Edge	37.00	2.22
07 62 19 00-0187	LF	>7" To 9" Girth, 24 Gauge, Stainless Steel Drip Edge	43.25	2.49
07 62 19 00-0188	LF	>9" To 12" Girth, 24 Gauge, Stainless Steel Drip Edge	53.22	2.63
07 62 19 00-0189	LF	>12" To 15" Girth, 24 Gauge, Stainless Steel Drip Edge	68.76	2.76
07 62 19 00-0190		22 Gauge, Stainless Steel Drip Edge *(07 62 19 00-0177)*		
07 62 19 00-0191	LF	Up To 5" Girth, 22 Gauge, Stainless Steel Drip Edge	35.29	2.08
07 62 19 00-0192	LF	>5" To 7" Girth, 22 Gauge, Stainless Steel Drip Edge	45.51	2.22
07 62 19 00-0193	LF	>7" To 9" Girth, 22 Gauge, Stainless Steel Drip Edge	53.36	2.49
07 62 19 00-0194	LF	>9" To 12" Girth, 22 Gauge, Stainless Steel Drip Edge	65.99	2.63
07 62 19 00-0195	LF	>12" To 15" Girth, 22 Gauge, Stainless Steel Drip Edge	85.79	2.76

07 63 Sheet Metal Roofing Specialties *(07 60)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
07 63 00 00-0001		**Pitch Pockets** *(07 63)* Note: Cut into deck, filled with non-shrink grout, includes blocking.		
07 63 00 00-0002		**24 Gauge Galvanized Sheet Metal, Non-Shrink Grout Filled Pitch Pockets** *(07 63 00 00-0001)*		
07 63 00 00-0003	EA	4" x 4" 24 Gauge Galvanized Sheet Metal, Non-Shrink Grout Filled Pitch Pocket	102.60	
		For Pourable Sealer Filled, Add	*41.63*	
		For Pourable Sealer Top Filled (2" Non-Shrink Grout Topped With 2" Pourable Sealer), Add	*20.82*	
07 63 00 00-0004	EA	6" x 6" 24 Gauge Galvanized Sheet Metal, Non-Shrink Grout Filled Pitch Pocket	123.94	
		For Pourable Sealer Filled, Add	*93.71*	
		For Pourable Sealer Top Filled (2" Non-Shrink Grout Topped With 2" Pourable Sealer), Add	*46.98*	
07 63 00 00-0005	EA	8" x 8" 24 Gauge Galvanized Sheet Metal, Non-Shrink Grout Filled Pitch Pocket	150.94	
		For Pourable Sealer Filled, Add	*166.50*	
		For Pourable Sealer Top Filled (2" Non-Shrink Grout Topped With 2" Pourable Sealer), Add	*83.06*	
07 63 00 00-0006	EA	8" x 10" 24 Gauge Galvanized Sheet Metal, Non-Shrink Grout Filled Pitch Pocket	165.44	
		For Pourable Sealer Filled, Add	*208.13*	
		For Pourable Sealer Top Filled (2" Non-Shrink Grout Topped With 2" Pourable Sealer), Add	*104.40*	
07 63 00 00-0007	EA	8" x 12" 24 Gauge Galvanized Sheet Metal, Non-Shrink Grout Filled Pitch Pocket	179.24	
		For Pourable Sealer Filled, Add	*249.76*	
		For Pourable Sealer Top Filled (2" Non-Shrink Grout Topped With 2" Pourable Sealer), Add	*124.90*	
07 63 00 00-0008	SF	24 Gauge Galvanized Sheet Metal, Non-Shrink Grout Filled Pitch Pocket	210.26	
		For Pourable Sealer Filled, Add	*374.63*	
		For Pourable Sealer Top Filled (2" Non-Shrink Grout Topped With 2" Pourable Sealer), Add	*186.16*	
07 63 00 00-0009		**16 Ounce Copper Sheet Metal, Non-Shrink Grout Filled Pitch Pockets** *(07 63 00 00-0001)*		
07 63 00 00-0010	EA	4" x 4" 16 Ounce Copper Sheet Metal, Non-Shrink Grout Filled Pitch Pocket	100.14	
		For Pourable Sealer Filled, Add	*41.63*	
		For Pourable Sealer Top Filled (2" Non-Shrink Grout Topped With 2" Pourable Sealer), Add	*20.82*	
07 63 00 00-0011	EA	6" x 6" 16 Ounce Copper Sheet Metal, Non-Shrink Grout Filled Pitch Pocket	120.72	
		For Pourable Sealer Filled, Add	*93.71*	
		For Pourable Sealer Top Filled (2" Non-Shrink Grout Topped With 2" Pourable Sealer), Add	*46.98*	
07 63 00 00-0012	EA	8" x 8" 16 Ounce Copper Sheet Metal, Non-Shrink Grout Filled Pitch Pocket	147.73	
		For Pourable Sealer Filled, Add	*166.50*	
		For Pourable Sealer Top Filled (2" Non-Shrink Grout Topped With 2" Pourable Sealer), Add	*83.06*	
07 63 00 00-0013	EA	8" x 10" 16 Ounce Copper Sheet Metal, Non-Shrink Grout Filled Pitch Pocket	164.99	
		For Pourable Sealer Filled, Add	*208.13*	
		For Pourable Sealer Top Filled (2" Non-Shrink Grout Topped With 2" Pourable Sealer), Add	*104.40*	
07 63 00 00-0014	EA	8" x 12" 16 Ounce Copper Sheet Metal, Non-Shrink Grout Filled Pitch Pocket	178.25	
		For Pourable Sealer Filled, Add	*249.76*	
		For Pourable Sealer Top Filled (2" Non-Shrink Grout Topped With 2" Pourable Sealer), Add	*124.90*	
07 63 00 00-0015	SF	16 Ounce Copper Sheet Metal, Non-Shrink Grout Filled Pitch Pocket	209.42	
		For Pourable Sealer Filled, Add	*374.63*	
		For Pourable Sealer Top Filled (2" Non-Shrink Grout Topped With 2" Pourable Sealer), Add	*186.16*	
07 63 00 00-0016		**24 Gauge Stainless Steel Sheet Metal, Non-Shrink Grout Filled Pitch Pockets** *(07 63 00 00-0001)*		
07 63 00 00-0017	EA	4" x 4" 24 Gauge Stainless Steel Sheet Metal, Non-Shrink Grout Filled Pitch Pocket	129.44	
		For Pourable Sealer Filled, Add	*41.63*	
		For Pourable Sealer Top Filled (2" Non-Shrink Grout Topped With 2" Pourable Sealer), Add	*20.82*	
07 63 00 00-0018	EA	6" x 6" 24 Gauge Stainless Steel Sheet Metal, Non-Shrink Grout Filled Pitch Pocket	154.09	
		For Pourable Sealer Filled, Add	*93.71*	
		For Pourable Sealer Top Filled (2" Non-Shrink Grout Topped With 2" Pourable Sealer), Add	*46.98*	
07 63 00 00-0019	EA	8" x 8" 24 Gauge Stainless Steel Sheet Metal, Non-Shrink Grout Filled Pitch Pocket	177.52	
		For Pourable Sealer Filled, Add	*166.50*	
		For Pourable Sealer Top Filled (2" Non-Shrink Grout Topped With 2" Pourable Sealer), Add	*83.06*	
07 63 00 00-0020	EA	8" x 10" 24 Gauge Stainless Steel Sheet Metal, Non-Shrink Grout Filled Pitch Pocket	191.35	
		For Pourable Sealer Filled, Add	*208.13*	
		For Pourable Sealer Top Filled (2" Non-Shrink Grout Topped With 2" Pourable Sealer), Add	*104.40*	
07 63 00 00-0021	EA	8" x 12" 24 Gauge Stainless Steel Sheet Metal, Non-Shrink Grout Filled Pitch Pocket	204.30	
		For Pourable Sealer Filled, Add	*249.76*	
		For Pourable Sealer Top Filled (2" Non-Shrink Grout Topped With 2" Pourable Sealer), Add	*124.90*	
07 63 00 00-0022	SF	24 Gauge Stainless Steel Sheet Metal, Non-Shrink Grout Filled Pitch Pocket	233.25	
		For Pourable Sealer Filled, Add	*374.63*	
		For Pourable Sealer Top Filled (2" Non-Shrink Grout Topped With 2" Pourable Sealer), Add	*186.16*	
07 63 00 00-0023		**Clean, Repair And Refill Existing Pitch Pockets With Non-Shrink Grout** *(07 63 00 00-0001)* Note: Includes removing existing filler and refilling with non-shrink grout.		
07 63 00 00-0024	EA	Clean, Repair And Refill Existing 4" x 4" Pitch Pocket With Non-Shrink Grout	90.52	
		For Pourable Sealer Filled, Add	*41.63*	
		For Pourable Sealer Top Filled (2" Non-Shrink Grout Topped With 2" Pourable Sealer), Add	*20.82*	
07 63 00 00-0025	EA	Clean, Repair And Refill Existing 6" x 6" Pitch Pocket With Non-Shrink Grout	103.10	
		For Pourable Sealer Filled, Add	*93.71*	
		For Pourable Sealer Top Filled (2" Non-Shrink Grout Topped With 2" Pourable Sealer), Add	*46.98*	
07 63 00 00-0026	EA	Clean, Repair And Refill Existing 8" x 8" Pitch Pocket With Non-Shrink Grout	119.74	
		For Pourable Sealer Filled, Add	*166.50*	
		For Pourable Sealer Top Filled (2" Non-Shrink Grout Topped With 2" Pourable Sealer), Add	*83.06*	
07 63 00 00-0027	EA	Clean, Repair And Refill Existing 8" x 10" Pitch Pocket With Non-Shrink Grout	130.40	
		For Pourable Sealer Filled, Add	*208.13*	
		For Pourable Sealer Top Filled (2" Non-Shrink Grout Topped With 2" Pourable Sealer), Add	*104.40*	

copyright 2026 The Gordian Group, Inc.

	MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
07 63 00 00-0028		EA	Clean, Repair And Refill Existing 8" x 12" Pitch Pocket With Non-Shrink Grout	141.06	
			For Pourable Sealer Filled, Add	*249.76*	
			For Pourable Sealer Top Filled (2" Non-Shrink Grout Topped With 2" Pourable Sealer), Add	*124.90*	
07 63 00 00-0029		SF	Clean, Repair And Refill Existing Pitch Pocket With Non-Shrink Grout	167.53	
			For Pourable Sealer Filled, Add	*374.63*	
			For Pourable Sealer Top Filled (2" Non-Shrink Grout Topped With 2" Pourable Sealer), Add	*186.16*	
07 63 00 00-0030			Lead Pipe Flashing For Roofs *(07 63)*		
			Note: Includes 6" skirt base.		
07 63 00 00-0031		EA	1-1/4" ID x 12" Riser Pipe, 4 Lb. Lead Pipe Flashing For Roofs, Fits 3/4" Diameter Pipe	101.98	34.18
07 63 00 00-0032		EA	1-1/2" ID x 12" Riser Pipe, 4 Lb. Lead Pipe Flashing For Roofs, Fits 1" Diameter Pipe	101.98	34.18
07 63 00 00-0033		EA	2-3/4" ID x 12" Riser Pipe, 4 Lb. Lead Pipe Flashing For Roofs, Fits 2" Diameter Pipe	120.83	34.18
07 63 00 00-0034		EA	3-3/4" ID x 12" Riser Pipe, 4 Lb. Lead Pipe Flashing For Roofs, Fits 3" Diameter Pipe	131.60	34.18
07 63 00 00-0035		EA	4-1/4" ID x 12" Riser Pipe, 4 Lb. Lead Pipe Flashing For Roofs, Fits 3-1/2" Diameter Pipe	136.98	34.18
07 63 00 00-0036		EA	4-3/4" ID x 12" Riser Pipe, 4 Lb. Lead Pipe Flashing For Roofs, Fits 4" Diameter Pipe	139.68	34.18
07 63 00 00-0037		EA	6-7/8" ID x 12" Riser Pipe, 4 Lb. Lead Pipe Flashing For Roofs, Fits 6" Diameter Pipe	166.60	34.18
07 63 00 00-0038		EA	8-7/8" ID x 12" Riser Pipe, 4 Lb. Lead Pipe Flashing For Roofs, Fits 8" Diameter Pipe	178.72	34.18
07 63 00 00-0039			Galvanized Metal Flashing With Neoprene Collar, Shingle Roofing *(07 63)*		
07 63 00 00-0040		EA	2" Vent Through Roof, Galvanized Metal Flashing With Neoprene Collar, Shingle Roofing	87.13	22.09
07 63 00 00-0041		EA	3" Vent Through Roof, Galvanized Metal Flashing With Neoprene Collar, Shingle Roofing	88.29	22.09
07 63 00 00-0042		EA	4" Vent Through Roof, Galvanized Metal Flashing With Neoprene Collar, Shingle Roofing	92.49	22.09
07 63 00 00-0043		EA	6" Vent Through Roof, Galvanized Metal Flashing With Neoprene Collar, Shingle Roofing	96.10	22.09

07 64 Sheet Metal Wall Cladding *(07 60)*

07 64 19 Flat Seam Sheet Metal Wall Cladding *(07 64)*

See CSI section 05 75 00 00-0000 for metal wall cladding.

07 65 Flexible Flashing *(07 60)*

07 65 16 Modified Bituminous Sheet Flashing *(07 65)*

07 65 16 00-0001			Liquid Flashing System For Modified And BUR Systems *(07 65 16)*		
07 65 16 00-0002		SF	60 Mil, Urethane Elastomer Liquid Applied Flashing Note: Includes applying a 30 mil base coat, rolling in a stichbonded polyester reinforcing scrim and applying a 30 mil second coat.	16.71	2.61

07 65 19 Plastic Sheet Flashing *(07 65)*

07 65 19 00-0001			Plastic Flashing And Trim *(07 65 19)*		
07 65 19 00-0002			Neoprene Flashing *(07 65 19 00-0001)*		
07 65 19 00-0003			60 Mil Neoprene Flashing *(07 65 19 00-0002)*		
07 65 19 00-0004		LF	6" Wide Strip, 60 Mil, Neoprene Flashing	11.32	3.72
07 65 19 00-0005		LF	12" Wide Strip, 60 Mil, Neoprene Flashing	14.82	3.99
07 65 19 00-0006		LF	18" Wide Strip, 60 Mil, Neoprene Flashing	18.75	4.40
07 65 19 00-0007		LF	24" Wide Strip, 60 Mil, Neoprene Flashing	22.91	4.96

07 65 33 Flexible Roof Boot *(07 65)*

07 65 33 00-0001			Neoprene Roof Boot *(07 65 33)*		
07 65 33 00-0002		EA	2" Diameter Pipe, Neoprene Roof Boot	49.09	11.43
07 65 33 00-0003		EA	3" Diameter Pipe, Neoprene Roof Boot	57.29	12.80
07 65 33 00-0004		EA	4" Diameter Pipe, Neoprene Roof Boot	63.30	13.77

07 90 Joint Protection *(07)*

07 91 Preformed Joint Seals *(07 90)*

07 91 23 Backer Rods *(07 91)*

07 91 23 00-0001			Backer Rods *(07 91 23)*		
07 91 23 00-0002		LF	1/4" Polyethylene Or Polyurethane Backer Rod	2.53	0.69
07 91 23 00-0003		LF	3/8" Polyethylene Or Polyurethane Backer Rod	2.73	0.69
07 91 23 00-0004		LF	1/2" Polyethylene Or Polyurethane Backer Rod	3.04	0.69
07 91 23 00-0005		LF	5/8" Polyethylene Or Polyurethane Backer Rod	3.56	0.69
07 91 23 00-0006		LF	3/4" Polyethylene Or Polyurethane Backer Rod	3.72	0.82
07 91 23 00-0007		LF	7/8" Polyethylene Or Polyurethane Backer Rod	4.16	0.82
07 91 23 00-0008		LF	1" Polyethylene Or Polyurethane Backer Rod	5.31	0.82
07 91 23 00-0009		LF	1-1/4" Polyethylene Or Polyurethane Backer Rod	6.42	0.96
07 91 23 00-0010		LF	1-1/2" Polyethylene Or Polyurethane Backer Rod	7.65	1.10
07 91 23 00-0011		LF	2" Polyethylene Or Polyurethane Backer Rod	10.54	1.24
07 91 23 00-0012		LF	3" Polyethylene Or Polyurethane Backer Rod	21.99	1.52

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

07 91 26 Joint Fillers *(07 91)*

07 91 26 00-0001 Butyl Rubber Fillers *(07 91 26)*

07 91 26 00-0002	LF	1/4" x 1/4" Butyl Rubber Filler	3.19	0.82
		For Custom Match Coloring, Add	*0.06*	
07 91 26 00-0003	LF	1/2" x 1/2" Butyl Rubber Filler	9.66	2.34
		For Custom Match Coloring, Add	*0.24*	
07 91 26 00-0004	LF	1/2" x 3/4" Butyl Rubber Filler	11.76	2.48
		For Custom Match Coloring, Add	*0.38*	
07 91 26 00-0005	LF	3/4" x 3/4" Butyl Rubber Filler	12.87	2.62
07 91 26 00-0006	LF	1" x 1" Butyl Rubber Filler	17.43	4.82

07 91 26 00-0007 Closed Cell Neoprene *(07 91 26)*

07 91 26 00-0008	CLF	1/8" x 3" Neoprene Gasket Closed Cell, Adhesive	546.16	158.90
07 91 26 00-0009	CLF	1/8" x 6" Neoprene Gasket Closed Cell, Adhesive	864.41	229.53
07 91 26 00-0010	CLF	1/4" x 3" Neoprene Gasket Closed Cell, Adhesive	696.80	196.76
07 91 26 00-0011	CLF	1/4" x 6" Neoprene Gasket Closed Cell, Adhesive	793.45	206.54
07 91 26 00-0012	CLF	1/2" x 6" Neoprene Gasket Closed Cell, Adhesive	1,211.56	317.80
07 91 26 00-0013	CLF	1/2" x 9" Neoprene Gasket Closed Cell, Adhesive	1,377.67	344.23
07 91 26 00-0014	CLF	1/2" x 12" Neoprene Gasket Closed Cell, Adhesive	1,217.71	250.33

07 91 26 00-0015 Closed Cell Polyvinyl Chloride *(07 91 26)*

07 91 26 00-0016	CLF	1/8" x 3" Polyethylene Joint Backing, Closed Cell	572.50	196.76
07 91 26 00-0017	CLF	1/8" x 6" Polyethylene Joint Backing, Closed Cell	1,022.46	317.80
07 91 26 00-0018	CLF	1/4" x 3" Polyethylene Joint Backing, Closed Cell	764.11	271.25
07 91 26 00-0019	CLF	1/4" x 6" Polyethylene Joint Backing, Closed Cell	960.27	286.40
07 91 26 00-0020	CLF	1/2" x 6" Polyethylene Joint Backing, Closed Cell	1,458.87	439.24
07 91 26 00-0021	CLF	1/2" x 9" Polyethylene Joint Backing, Closed Cell	1,743.51	476.69
07 91 26 00-0022	CLF	1/2" x 12" Polyethylene Joint Backing, Closed Cell	2,366.41	571.42

07 91 26 00-0023 Silicon RTV Foam Penetration Seal *(07 91 26)*

07 91 26 00-0024	CLF	1/4" x 1/2" Silicon RTV Foam Seal	175.32	31.53
07 91 26 00-0025	CLF	1/2" x 1/2" Silicon RTV Foam Seal	350.63	62.92
07 91 26 00-0026	CLF	1/2" x 3/4" Silicon RTV Foam Seal	522.39	93.50
07 91 26 00-0027	CLF	3/4" x 3/4" Silicon RTV Foam Seal	736.50	125.99
07 91 26 00-0028	CLF	1/8" x 1" Silicon RTV Foam Seal	175.32	31.53
07 91 26 00-0029	CLF	1/8" x 3" Silicon RTV Foam Seal	521.83	93.22
07 91 26 00-0030	CLF	1/4" x 3" Silicon RTV Foam Seal	888.69	140.03
07 91 26 00-0031	CLF	1/4" x 6" Silicon RTV Foam Seal	1,774.92	279.11
07 91 26 00-0032	CLF	1/2" x 6" Silicon RTV Foam Seal	3,360.15	503.82
07 91 26 00-0033	CLF	1/2" x 9" Silicon RTV Foam Seal	5,141.51	787.05
07 91 26 00-0034	CLF	1/2" x 12" Silicon RTV Foam Seal	7,576.14	1,259.33

07 91 26 00-0035 Seals O-Ring Type Cord "J-Seal" *(07 91 26)*

07 91 26 00-0036	LF	1/4" Seals O-Ring Cord, J-Seal	5.89	1.79
07 91 26 00-0037	LF	1/2" Seals O-Ring Cord, J-Seal	6.24	1.79
07 91 26 00-0038	LF	3/4" Seals O-Ring Cord, J-Seal	6.57	1.94
07 91 26 00-0039	LF	1" Seals O-Ring Cord, J-Seal	6.91	2.08
07 91 26 00-0040	LF	1-1/4" Seals O-Ring Cord, J-Seal	7.39	2.22
07 91 26 00-0041	LF	1-1/2" Seals O-Ring Cord, J-Seal	7.73	2.22
07 91 26 00-0042	LF	1-3/4" Seals O-Ring Cord, J-Seal	8.16	2.35
07 91 26 00-0043	LF	2" Seals O-Ring Cord, J-Seal	8.41	2.35

07 91 33 Expansion Joint Seal Systems *(07 91)*

07 91 33 00-0001 Expansion Joint Seal Systems (Wabo®) *(07 91 33)*

07 91 33 00-0002 Coated Foam, Pre-Compressed, Elastomeric Expansion Joint Seal Systems (Wabo® HSeal) *(07 91 33 00-0001)*

Note: Includes a pre-compressed seal, epoxy adhesive and traffic grade elastomeric top coating.

07 91 33 00-0003	LF	1/2" Minimum, 1-1/2" Maximum Joint Opening, Coated Foam, Pre-Compressed, Elastomeric Expansion Joint Seal System (Wabo® HSeal 25EH)	103.12	9.05
07 91 33 00-0004	LF	3/4" Minimum, 2-1/4" Maximum Joint Opening, Coated Foam, Pre-Compressed, Elastomeric Expansion Joint Seal System (Wabo® HSeal 40EH)	137.65	9.48
07 91 33 00-0005	LF	1" Minimum, 3" Maximum Joint Opening, Coated Foam, Pre-Compressed, Elastomeric Expansion Joint Seal System (Wabo® HSeal 50EH)	174.05	9.92
07 91 33 00-0006	LF	1-1/4" Minimum, 3-3/4" Maximum Joint Opening, Coated Foam, Pre-Compressed, Elastomeric Expansion Joint Seal System (Wabo® HSeal 65EH)	214.55	10.34
07 91 33 00-0007	LF	1-1/2" Minimum, 4-1/2" Maximum Joint Opening, Coated Foam, Pre-Compressed, Elastomeric Expansion Joint Seal System (Wabo® HSeal 75EH)	278.02	10.78
07 91 33 00-0008	LF	1-3/4" Minimum, 5-1/4" Maximum Joint Opening, Coated Foam, Pre-Compressed, Elastomeric Expansion Joint Seal System (Wabo® HSeal 90EH)	319.21	11.20
07 91 33 00-0009	LF	2" Minimum, 6" Maximum Joint Opening, Coated Foam, Pre-Compressed, Elastomeric Expansion Joint Seal System (Wabo® HSeal 100EH)	370.28	11.64

copyright 2026 The Gordian Group, Inc.

CSI	MINOR UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
07 91 33 00-0010		Neoprene, Preformed Elastomeric Horizontal Expansion Joint Seal Systems (Wabo® CompressionSeal) *(07 91 33 00-0001)*		
		Note: Includes preformed neoprene joint seal and lubricant adhesive.		
07 91 33 00-0011	LF	0.625" Minimum, 1.381" Maximum Joint Opening, Neoprene, Preformed Elastomeric Horizontal Expansion Joint Seal System (Wabo® CompressionSeal WA-162)	53.23	9.05
07 91 33 00-0012	LF	0.688" Minimum, 1.488" Maximum Joint Opening, Neoprene, Preformed Elastomeric Horizontal Expansion Joint Seal System (Wabo® CompressionSeal WA-175)	58.03	9.18
07 91 33 00-0013	LF	0.875" Minimum, 1.700" Maximum Joint Opening, Neoprene, Preformed Elastomeric Horizontal Expansion Joint Seal System (Wabo® CompressionSeal WA-200)	69.95	9.31
07 91 33 00-0014	LF	0.953" Minimum, 1.913" Maximum Joint Opening, Neoprene, Preformed Elastomeric Horizontal Expansion Joint Seal System (Wabo® CompressionSeal WA-225)	74.20	9.48
07 91 33 00-0015	LF	1.000" Minimum, 2.125" Maximum Joint Opening, Neoprene, Preformed Elastomeric Horizontal Expansion Joint Seal System (Wabo® CompressionSeal WA-250)	79.22	9.61
07 91 33 00-0016	LF	1.125" Minimum, 2.550" Maximum Joint Opening, Neoprene, Preformed Elastomeric Horizontal Expansion Joint Seal System (Wabo® CompressionSeal WA-300)	96.89	9.74
07 91 33 00-0017	LF	1.375" Minimum, 2.975" Maximum Joint Opening, Neoprene, Preformed Elastomeric Horizontal Expansion Joint Seal System (Wabo® CompressionSeal WA-350)	119.29	9.92
07 91 33 00-0018	LF	1.625" Minimum, 3.400" Maximum Joint Opening, Neoprene, Preformed Elastomeric Horizontal Expansion Joint Seal System (Wabo® CompressionSeal WA-400)	140.95	10.34
07 91 33 00-0019	LF	1.687" Minimum, 4.250" Maximum Joint Opening, Neoprene, Preformed Elastomeric Horizontal Expansion Joint Seal System (Wabo® CompressionSeal WA-500)	159.46	10.78
07 91 33 00-0020		Santoprene®, Preformed Elastomeric Vertical Expansion Joint Seal Systems (Wabo® CompressionSeal) *(07 91 33 00-0001)*		
		Note: Includes preformed Santoprene® joint seal and lubricant adhesive.		
07 91 33 00-0021	LF	0.500" Minimum, 1.500" Maximum Joint Opening, Santoprene®, Preformed Elastomeric Vertical Expansion Joint Seal System (Wabo® CompressionSeal WE-100)	44.73	9.05
07 91 33 00-0022	LF	0.688" Minimum, 1.938" Maximum Joint Opening, Santoprene®, Preformed Elastomeric Vertical Expansion Joint Seal System (Wabo® CompressionSeal WE-225)	57.89	9.48
07 91 33 00-0023	LF	1.063" Minimum, 2.125" Maximum Joint Opening, Santoprene®, Preformed Elastomeric Vertical Expansion Joint Seal System (Wabo® CompressionSeal WE-250)	70.81	9.92
07 91 33 00-0024	LF	1.250" Minimum, 2.563" Maximum Joint Opening, Santoprene®, Preformed Elastomeric Vertical Expansion Joint Seal System (Wabo® CompressionSeal WE-300)	74.74	10.13
07 91 33 00-0025	LF	1.250" Minimum, 3.375" Maximum Joint Opening, Santoprene®, Preformed Elastomeric Vertical Expansion Joint Seal System (Wabo® CompressionSeal WE-400)	82.82	10.34
07 91 33 00-0026	LF	1.438" Minimum, 4.250" Maximum Joint Opening, Santoprene®, Preformed Elastomeric Vertical Expansion Joint Seal System (Wabo® CompressionSeal WE-500)	118.34	10.78
07 91 33 00-0027	LF	1.813" Minimum, 5.125" Maximum Joint Opening, Santoprene®, Preformed Elastomeric Vertical Expansion Joint Seal System (Wabo® CompressionSeal WE-600)	162.28	11.20
07 91 33 00-0028		Coated Foam, Pre-Compressed, Elastomeric Expansion Joint Seal Systems (Wabo® Seismic WeatherSeal) *(07 91 33 00-0001)*		
		Note: Includes a pre-compressed foam seal and silicone sealant.		
07 91 33 00-0029	LF	1/2" Minimum, 1-1/2" Maximum Joint Opening, Coated Foam, Pre-Compressed, Elastomeric Expansion Joint Seal System (Wabo® Seismic WeatherSeal SWS-100)	37.97	3.60
07 91 33 00-0030	LF	3/4" Minimum, 2-1/4" Maximum Joint Opening, Coated Foam, Pre-Compressed, Elastomeric Expansion Joint Seal System (Wabo® Seismic WeatherSeal SWS-150)	63.53	3.74
07 91 33 00-0031	LF	1" Minimum, 3" Maximum Joint Opening, Coated Foam, Pre-Compressed, Elastomeric Expansion Joint Seal System (Wabo® Seismic WeatherSeal SWS-200)	95.53	3.88
07 91 33 00-0032	LF	1-1/4" Minimum, 3-3/4" Maximum Joint Opening, Coated Foam, Pre-Compressed, Elastomeric Expansion Joint Seal System (Wabo® Seismic WeatherSeal SWS-250)	120.40	4.02
07 91 33 00-0033	LF	1-1/2" Minimum, 4-1/2" Maximum Joint Opening, Coated Foam, Pre-Compressed, Elastomeric Expansion Joint Seal System (Wabo® Seismic WeatherSeal SWS-300)	158.38	4.16
07 91 33 00-0034	LF	1-3/4" Minimum, 5-1/4" Maximum Joint Opening, Coated Foam, Pre-Compressed, Elastomeric Expansion Joint Seal System (Wabo® Seismic WeatherSeal SWS-350)	209.44	4.31
07 91 33 00-0035	LF	2" Minimum, 6" Maximum Joint Opening, Coated Foam, Pre-Compressed, Elastomeric Expansion Joint Seal System (Wabo® Seismic WeatherSeal SWS-400)	256.82	4.46
07 91 33 00-0036	LF	2-1/2" Minimum, 7-1/2" Maximum Joint Opening, Coated Foam, Pre-Compressed, Elastomeric Expansion Joint Seal System (Wabo® Seismic WeatherSeal SWS-500)	346.27	4.60
07 91 33 00-0037	LF	3" Minimum, 9" Maximum Joint Opening, Coated Foam, Pre-Compressed, Elastomeric Expansion Joint Seal System (Wabo® Seismic WeatherSeal SWS-600)	404.23	4.74
07 91 33 00-0038		Silicone Faced Foam, Preformed Elastomeric Expansion Joint Seal Systems (Wabo® WeatherSeal II) *(07 91 33 00-0001)*		
		Note: Includes a pre-compressed foam seal and silicone sealant.		
07 91 33 00-0039	LF	0.75" Minimum, 1.25" Maximum Joint Opening, Silicone Faced Foam, Preformed Elastomeric Expansion Joint Seal System (Wabo® WeatherSeal II WS-100)	37.05	3.60
07 91 33 00-0040	LF	1.13" Minimum, 1.88" Maximum Joint Opening, Silicone Faced Foam, Preformed Elastomeric Expansion Joint Seal System (Wabo® WeatherSeal II WS-150)	48.83	3.74
07 91 33 00-0041	LF	1.50" Minimum, 2.50" Maximum Joint Opening, Silicone Faced Foam, Preformed Elastomeric Expansion Joint Seal System (Wabo® WeatherSeal II WS-200)	65.43	3.88
07 91 33 00-0042	LF	1.88" Minimum, 3.13" Maximum Joint Opening, Silicone Faced Foam, Preformed Elastomeric Expansion Joint Seal System (Wabo® WeatherSeal II WS-250)	88.69	4.02
07 91 33 00-0043	LF	2.25" Minimum, 3.75" Maximum Joint Opening, Silicone Faced Foam, Preformed Elastomeric Expansion Joint Seal System (Wabo® WeatherSeal II WS-300)	101.17	4.16
07 91 33 00-0044	LF	2.63" Minimum, 4.38" Maximum Joint Opening, Silicone Faced Foam, Preformed Elastomeric Expansion Joint Seal System (Wabo® WeatherSeal II WS-350)	140.28	4.31
07 91 33 00-0045	LF	3.00" Minimum, 5.00" Maximum Joint Opening, Silicone Faced Foam, Preformed Elastomeric Expansion Joint Seal System (Wabo® WeatherSeal II WS-400)	188.35	4.46

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
07 91 33 00-0046	LF	3.75" Minimum, 6.25" Maximum Joint Opening, Silicone Faced Foam, Preformed Elastomeric Expansion Joint Seal System (Wabo® WeatherSeal II WS-500)	203.36	4.60
07 91 33 00-0047		Molded EPDM Rubber Cover, For Pedestrian Foot Traffic And Slow Speed Non-Commercial Vehicular Traffic (Wabo® SafetyFlexl) *(07 91 33 00-0001)*		
07 91 33 00-0048	LF	2-1/2" Minimum, 12" Maximum Joint Opening, Elastomeric Hinged Cover System for Pedestrian Walkway And Low-speed Vehicular Traffic Areas (Wabo® SafetyFlex SFP-600)	275.64	11.64
07 91 33 00-0049		Closed Cell Neoprene Expanded Rubber Foam Seal, Preformed Flexible Joint Seal Systems (Wabo® InverSeal) *(07 91 33 00-0001)*		
		Note: Includes epoxy adhesive.		
07 91 33 00-0050	LF	0.45" Minimum, 1.25" Maximum Joint Opening, Closed Cell Neoprene Expanded Rubber Foam Seal, Preformed Flexible Joint Seal Systems (Wabo® InverSeal IV-100)	30.82	
07 91 33 00-0051	LF	0.675" Minimum, 1.875" Maximum Joint Opening, Closed Cell Neoprene Expanded Rubber Foam Seal, Preformed Flexible Joint Seal Systems (Wabo® InverSeal IV-150)	33.69	
07 91 33 00-0052	LF	0.90" Minimum, 2.50" Maximum Joint Opening, Closed Cell Neoprene Expanded Rubber Foam Seal, Preformed Flexible Joint Seal Systems (Wabo® InverSeal IV-200)	44.01	
07 91 33 00-0053	LF	1.125" Minimum, 3.125" Maximum Joint Opening, Closed Cell Neoprene Expanded Rubber Foam Seal, Preformed Flexible Joint Seal Systems (Wabo® InverSeal IV-250)	54.43	
07 91 33 00-0054	LF	1.35" Minimum, 3.75" Maximum Joint Opening, Closed Cell Neoprene Expanded Rubber Foam Seal, Preformed Flexible Joint Seal Systems (Wabo® InverSeal IV-300)	138.14	
07 91 33 00-0055	LF	1.80" Minimum, 5.00" Maximum Joint Opening, Closed Cell Neoprene Expanded Rubber Foam Seal, Preformed Flexible Joint Seal Systems (Wabo® InverSeal IV-400)	177.85	

07 92 Joint Sealants *(07 90)*

07 92 13 Elastomeric Joint Sealants *(07 92)*

07 92 13 00-0001		Silicone Sealant And Caulking *(07 92 13)*		
07 92 13 00-0002	CLF	1/4" x 1/4" Joint, Silicone Sealant And Caulking	429.12	128.51
		For Custom Match Coloring, Add	*10.46*	
		For Up To 6 CLF, Add	*22.55*	
		For >30 CLF, Deduct	*-23.64*	
		For 1 Part Mildew Resistant, Add	*15.26*	
		For High-Modulus Non-Acid Curing, Add	*8.72*	
07 92 13 00-0003	CLF	1/4" x 3/8" Joint, Silicone Sealant And Caulking	450.92	128.51
		For Custom Match Coloring, Add	*15.69*	
		For Up To 4 CLF, Add	*24.18*	
		For >20 CLF, Deduct	*-25.82*	
		For 1 Part Mildew Resistant, Add	*22.89*	
		For High-Modulus Non-Acid Curing, Add	*13.08*	
07 92 13 00-0004	CLF	1/4" x 1/2" Joint, Silicone Sealant And Caulking	486.99	132.79
		For Custom Match Coloring, Add	*20.92*	
		For Up To 3 CLF, Add	*26.53*	
		For >15 CLF, Deduct	*-28.71*	
		For 1 Part Mildew Resistant, Add	*30.51*	
		For High-Modulus Non-Acid Curing, Add	*17.44*	
07 92 13 00-0005	CLF	3/8" x 3/8" Joint, Silicone Sealant And Caulking	497.89	132.79
		For Custom Match Coloring, Add	*23.54*	
		For Up To 2.5 CLF, Add	*27.35*	
		For >13 CLF, Deduct	*-29.80*	
		For 1 Part Mildew Resistant, Add	*34.33*	
		For High-Modulus Non-Acid Curing, Add	*19.62*	
07 92 13 00-0006	CLF	3/8" x 1/2" Joint, Silicone Sealant And Caulking	530.58	132.79
		For Custom Match Coloring, Add	*31.38*	
		For Up To 2 CLF, Add	*29.80*	
		For >10 CLF, Deduct	*-33.07*	
		For 1 Part Mildew Resistant, Add	*45.77*	
		For High-Modulus Non-Acid Curing, Add	*26.15*	
07 92 13 00-0007	CLF	3/8" x 5/8" Joint, Silicone Sealant And Caulking	563.27	132.79
		For Custom Match Coloring, Add	*39.23*	
		For Up To 1.5 CLF, Add	*32.25*	
		For >8 CLF, Deduct	*-36.34*	
		For 1 Part Mildew Resistant, Add	*57.21*	
		For High-Modulus Non-Acid Curing, Add	*32.69*	
07 92 13 00-0008	CLF	3/8" x 3/4" Joint, Silicone Sealant And Caulking	610.24	138.50
		For Custom Match Coloring, Add	*47.08*	
		For Up To 1.3 CLF, Add	*35.42*	
		For >7 CLF, Deduct	*-40.32*	
		For 1 Part Mildew Resistant, Add	*68.65*	
		For High-Modulus Non-Acid Curing, Add	*39.23*	
07 92 13 00-0009	CLF	1/2" x 1/2" Joint, Silicone Sealant And Caulking	588.45	138.50
		For Custom Match Coloring, Add	*41.85*	
		For Up To 1.4 CLF, Add	*33.78*	
		For >7.5 CLF, Deduct	*-38.14*	
		For 1 Part Mildew Resistant, Add	*61.03*	
		For High-Modulus Non-Acid Curing, Add	*34.87*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
07 92 13 00-0010	CLF	1/2" x 5/8" Joint, Silicone Sealant And Caulking	646.32	142.79
		For Custom Match Coloring, Add	*52.31*	
		For Up To 1.15 CLF, Add	*37.76*	
		For >6 CLF, Deduct	*-43.21*	
		For 1 Part Mildew Resistant, Add	*76.28*	
		For High-Modulus Non-Acid Curing, Add	*43.59*	
07 92 13 00-0011	CLF	1/2" x 3/4" Joint, Silicone Sealant And Caulking	689.91	142.79
		For Custom Match Coloring, Add	*62.77*	
		For Up To 1 CLF, Add	*41.03*	
		For >5 CLF, Deduct	*-47.57*	
		For 1 Part Mildew Resistant, Add	*91.54*	
		For High-Modulus Non-Acid Curing, Add	*52.31*	
07 92 13 00-0012	CLF	1/2" x 7/8" Joint, Silicone Sealant And Caulking	747.77	147.07
		For Custom Match Coloring, Add	*73.23*	
		For Up To 0.8 CLF, Add	*45.02*	
		For >4.5 CLF, Deduct	*-52.65*	
		For 1 Part Mildew Resistant, Add	*106.80*	
		For High-Modulus Non-Acid Curing, Add	*61.03*	
07 92 13 00-0013	CLF	1/2" x 1" Joint, Silicone Sealant And Caulking	805.64	152.78
		For Custom Match Coloring, Add	*83.69*	
		For Up To 0.75 CLF, Add	*49.00*	
		For >4 CLF, Deduct	*-57.72*	
		For 1 Part Mildew Resistant, Add	*122.05*	
		For High-Modulus Non-Acid Curing, Add	*69.74*	
07 92 13 00-0014	CLF	3/4" x 3/4" Joint, Silicone Sealant And Caulking	863.51	157.07
		For Custom Match Coloring, Add	*94.15*	
		For Up To 0.65 CLF, Add	*52.98*	
		For >3.5 CLF, Deduct	*-62.79*	
		For 1 Part Mildew Resistant, Add	*137.31*	
		For High-Modulus Non-Acid Curing, Add	*78.46*	
07 92 13 00-0015	CLF	3/4" x 1" Joint, Silicone Sealant And Caulking	1,037.11	171.35
		For Custom Match Coloring, Add	*125.54*	
		For Up To 0.5 CLF, Add	*64.93*	
		For >2.5 CLF, Deduct	*-78.01*	
		For 1 Part Mildew Resistant, Add	*183.08*	
		For High-Modulus Non-Acid Curing, Add	*104.62*	
07 92 13 00-0016	CLF	1" x 1" Joint, Silicone Sealant And Caulking	1,268.59	189.91
		For Custom Match Coloring, Add	*167.39*	
		For Up To 0.4 CLF, Add	*80.87*	
		For >2 CLF, Deduct	*-98.30*	
		For 1 Part Mildew Resistant, Add	*244.10*	
		For High-Modulus Non-Acid Curing, Add	*139.49*	

07 92 13 00-0017 Acrylic/Latex Sealant And Caulking *(07 92 13)*

07 92 13 00-0018	CLF	1/4" x 1/4" Joint, Acrylic/Latex Sealant And Caulking	400.82	128.51
		For Up To 6 CLF, Add	*20.42*	
		For >30 CLF, Deduct	*-20.81*	
07 92 13 00-0019	CLF	1/4" x 3/8" Joint, Acrylic/Latex Sealant And Caulking	408.47	128.51
		For Up To 4 CLF, Add	*21.00*	
		For >20 CLF, Deduct	*-21.57*	
07 92 13 00-0020	CLF	1/4" x 1/2" Joint, Acrylic/Latex Sealant And Caulking	430.40	132.79
		For Up To 3 CLF, Add	*22.28*	
		For >15 CLF, Deduct	*-23.05*	
07 92 13 00-0021	CLF	3/8" x 3/8" Joint, Acrylic/Latex Sealant And Caulking	434.22	132.79
		For Up To 2.5 CLF, Add	*22.57*	
		For >13 CLF, Deduct	*-23.43*	
07 92 13 00-0022	CLF	3/8" x 1/2" Joint, Acrylic/Latex Sealant And Caulking	445.69	132.79
		For Up To 2 CLF, Add	*23.43*	
		For >10 CLF, Deduct	*-24.58*	
07 92 13 00-0023	CLF	3/8" x 5/8" Joint, Acrylic/Latex Sealant And Caulking	457.16	132.79
		For Up To 1.5 CLF, Add	*24.29*	
		For >8 CLF, Deduct	*-25.73*	
07 92 13 00-0024	CLF	3/8" x 3/4" Joint, Acrylic/Latex Sealant And Caulking	482.91	138.50
		For Up To 1.3 CLF, Add	*25.87*	
		For >7 CLF, Deduct	*-27.59*	
07 92 13 00-0025	CLF	1/2" x 1/2" Joint, Acrylic/Latex Sealant And Caulking	475.26	138.50
		For Up To 1.4 CLF, Add	*25.29*	
		For >7.5 CLF, Deduct	*-26.82*	
07 92 13 00-0026	CLF	1/2" x 5/8" Joint, Acrylic/Latex Sealant And Caulking	504.83	142.79
		For Up To 1.15 CLF, Add	*27.15*	
		For >6 CLF, Deduct	*-29.06*	
07 92 13 00-0027	CLF	1/2" x 3/4" Joint, Acrylic/Latex Sealant And Caulking	520.13	142.79
		For Up To 1 CLF, Add	*28.30*	
		For >5 CLF, Deduct	*-30.59*	
07 92 13 00-0028	CLF	1/2" x 7/8" Joint, Acrylic/Latex Sealant And Caulking	549.69	147.07
		For Up To 0.8 CLF, Add	*30.16*	
		For >4.5 CLF, Deduct	*-32.84*	
07 92 13 00-0029	CLF	1/2" x 1" Joint, Acrylic/Latex Sealant And Caulking	579.26	152.78
		For Up To 0.75 CLF, Add	*32.02*	
		For >4 CLF, Deduct	*-35.08*	
07 92 13 00-0030	CLF	3/4" x 3/4" Joint, Acrylic/Latex Sealant And Caulking	608.83	157.07
		For Up To 0.65 CLF, Add	*33.88*	
		For >3.5 CLF, Deduct	*-37.32*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
07 92 13 00-0031	CLF	3/4" x 1" Joint, Acrylic/Latex Sealant And Caulking	697.54	171.35
		For Up To 0.5 CLF, Add	*39.46*	
		For >2.5 CLF, Deduct	*-44.05*	
07 92 13 00-0032	CLF	1" x 1" Joint, Acrylic/Latex Sealant And Caulking	815.83	189.91
		For Up To 0.4 CLF, Add	*46.91*	
		For >2 CLF, Deduct	*-53.03*	
07 92 13 00-0033		**Polyurethane Sealant And Caulking** *(07 92 13)*		
		Note: 1 or 2 part, non-sag.		
07 92 13 00-0034	CLF	1/4" x 1/4" Joint, Polyurethane Sealant And Caulking	418.96	128.51
		For Up To 6 CLF, Add	*21.78*	
		For >30 CLF, Deduct	*-22.62*	
07 92 13 00-0035	CLF	1/4" x 3/8" Joint, Polyurethane Sealant And Caulking	435.68	128.51
		For Up To 4 CLF, Add	*23.04*	
		For >20 CLF, Deduct	*-24.29*	
07 92 13 00-0036	CLF	1/4" x 1/2" Joint, Polyurethane Sealant And Caulking	466.67	132.79
		For Up To 3 CLF, Add	*25.01*	
		For >15 CLF, Deduct	*-26.68*	
07 92 13 00-0037	CLF	3/8" x 3/8" Joint, Polyurethane Sealant And Caulking	475.03	132.79
		For Up To 2.5 CLF, Add	*25.63*	
		For >13 CLF, Deduct	*-27.51*	
07 92 13 00-0038	CLF	3/8" x 1/2" Joint, Polyurethane Sealant And Caulking	500.11	132.79
		For Up To 2 CLF, Add	*27.51*	
		For >10 CLF, Deduct	*-30.02*	
07 92 13 00-0039	CLF	3/8" x 5/8" Joint, Polyurethane Sealant And Caulking	525.18	132.79
		For Up To 1.5 CLF, Add	*29.39*	
		For >8 CLF, Deduct	*-32.53*	
07 92 13 00-0040	CLF	3/8" x 3/4" Joint, Polyurethane Sealant And Caulking	564.53	138.50
		For Up To 1.3 CLF, Add	*31.99*	
		For >7 CLF, Deduct	*-35.75*	
07 92 13 00-0041	CLF	1/2" x 1/2" Joint, Polyurethane Sealant And Caulking	547.82	138.50
		For Up To 1.4 CLF, Add	*30.73*	
		For >7.5 CLF, Deduct	*-34.08*	
07 92 13 00-0042	CLF	1/2" x 5/8" Joint, Polyurethane Sealant And Caulking	595.53	142.79
		For Up To 1.15 CLF, Add	*33.96*	
		For >6 CLF, Deduct	*-38.13*	
07 92 13 00-0043	CLF	1/2" x 3/4" Joint, Polyurethane Sealant And Caulking	628.96	142.79
		For Up To 1 CLF, Add	*36.46*	
		For >5 CLF, Deduct	*-41.48*	
07 92 13 00-0044	CLF	1/2" x 7/8" Joint, Polyurethane Sealant And Caulking	676.66	147.07
		For Up To 0.8 CLF, Add	*39.68*	
		For >4.5 CLF, Deduct	*-45.53*	
07 92 13 00-0045	CLF	1/2" x 1" Joint, Polyurethane Sealant And Caulking	724.38	152.78
		For Up To 0.75 CLF, Add	*42.91*	
		For >4 CLF, Deduct	*-49.59*	
07 92 13 00-0046	CLF	3/4" x 3/4" Joint, Polyurethane Sealant And Caulking	772.09	157.07
		For Up To 0.65 CLF, Add	*46.13*	
		For >3.5 CLF, Deduct	*-53.65*	
07 92 13 00-0047	CLF	3/4" x 1" Joint, Polyurethane Sealant And Caulking	915.21	171.35
		For Up To 0.5 CLF, Add	*55.79*	
		For >2.5 CLF, Deduct	*-65.82*	
07 92 13 00-0048		**Flexible Polysulfide Sealant And Caulking, Clear** *(07 92 13)*		
		Note: 1 or 2 part, non-sag.		
07 92 13 00-0049	CLF	1/4" x 1/4" Joint, Polysulfide Sealant And Caulking	422.13	128.51
		For Up To 6 CLF, Add	*22.02*	
		For >30 CLF, Deduct	*-22.94*	
07 92 13 00-0050	CLF	1/4" x 3/8" Joint, Polysulfide Sealant And Caulking	440.45	128.51
		For Up To 4 CLF, Add	*23.40*	
		For >20 CLF, Deduct	*-24.77*	
07 92 13 00-0051	CLF	1/4" x 1/2" Joint, Polysulfide Sealant And Caulking	473.04	132.79
		For Up To 3 CLF, Add	*25.48*	
		For >15 CLF, Deduct	*-27.31*	
07 92 13 00-0052	CLF	3/8" x 3/8" Joint, Polysulfide Sealant And Caulking	482.19	132.79
		For Up To 2.5 CLF, Add	*26.17*	
		For >13 CLF, Deduct	*-28.23*	
07 92 13 00-0053	CLF	3/8" x 1/2" Joint, Polysulfide Sealant And Caulking	509.66	132.79
		For Up To 2 CLF, Add	*28.23*	
		For >10 CLF, Deduct	*-30.98*	
07 92 13 00-0054	CLF	3/8" x 5/8" Joint, Polysulfide Sealant And Caulking	537.11	132.79
		For Up To 1.5 CLF, Add	*30.29*	
		For >8 CLF, Deduct	*-33.72*	
07 92 13 00-0055	CLF	3/8" x 3/4" Joint, Polysulfide Sealant And Caulking	578.84	138.50
		For Up To 1.3 CLF, Add	*33.06*	
		For >7 CLF, Deduct	*-37.18*	
07 92 13 00-0056	CLF	1/2" x 1/2" Joint, Polysulfide Sealant And Caulking	560.54	138.50
		For Up To 1.4 CLF, Add	*31.69*	
		For >7.5 CLF, Deduct	*-35.35*	
07 92 13 00-0057	CLF	1/2" x 5/8" Joint, Polysulfide Sealant And Caulking	611.44	142.79
		For Up To 1.15 CLF, Add	*35.15*	
		For >6 CLF, Deduct	*-39.73*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
07 92 13 00-0058	CLF	1/2" x 3/4" Joint, Polysulfide Sealant And Caulking	648.05	142.79
		For Up To 1 CLF, Add	*37.89*	
		For >5 CLF, Deduct	*-43.39*	
07 92 13 00-0059	CLF	1/2" x 7/8" Joint, Polysulfide Sealant And Caulking	698.94	147.07
		For Up To 0.8 CLF, Add	*41.35*	
		For >4.5 CLF, Deduct	*-47.76*	
07 92 13 00-0060	CLF	1/2" x 1" Joint, Polysulfide Sealant And Caulking	749.82	152.78
		For Up To 0.75 CLF, Add	*44.81*	
		For >4 CLF, Deduct	*-52.14*	
07 92 13 00-0061	CLF	3/4" x 3/4" Joint, Polysulfide Sealant And Caulking	800.72	157.07
		For Up To 0.65 CLF, Add	*48.27*	
		For >3.5 CLF, Deduct	*-56.51*	
07 92 13 00-0062	CLF	3/4" x 1" Joint, Polysulfide Sealant And Caulking	953.38	171.35
		For Up To 0.5 CLF, Add	*58.65*	
		For >2.5 CLF, Deduct	*-69.64*	

07 92 13 00-0063 Flexible Polyurethane Security Sealant And Caulking *(07 92 13)*

Note: 1 or 2 part, non-sag.

07 92 13 00-0064	CLF	1/4" x 1/4" Joint, Flexible Polyurethane Security Sealant And Caulking	429.90	128.51
		For Up To 6 CLF, Add	*22.60*	
		For >30 CLF, Deduct	*-23.71*	
07 92 13 00-0065	CLF	1/4" x 3/8" Joint, Flexible Polyurethane Security Sealant And Caulking	452.09	128.51
		For Up To 4 CLF, Add	*24.27*	
		For >20 CLF, Deduct	*-25.93*	
07 92 13 00-0066	CLF	1/4" x 1/2" Joint, Flexible Polyurethane Security Sealant And Caulking	488.55	132.79
		For Up To 3 CLF, Add	*26.65*	
		For >15 CLF, Deduct	*-28.86*	
07 92 13 00-0067	CLF	3/8" x 3/8" Joint, Flexible Polyurethane Security Sealant And Caulking	499.65	132.79
		For Up To 2.5 CLF, Add	*27.48*	
		For >13 CLF, Deduct	*-29.97*	
07 92 13 00-0068	CLF	3/8" x 1/2" Joint, Flexible Polyurethane Security Sealant And Caulking	532.92	132.79
		For Up To 2 CLF, Add	*29.97*	
		For >10 CLF, Deduct	*-33.30*	
07 92 13 00-0069	CLF	3/8" x 5/8" Joint, Flexible Polyurethane Security Sealant And Caulking	566.20	132.79
		For Up To 1.5 CLF, Add	*32.47*	
		For >8 CLF, Deduct	*-36.63*	
07 92 13 00-0070	CLF	3/8" x 3/4" Joint, Flexible Polyurethane Security Sealant And Caulking	613.76	138.50
		For Up To 1.3 CLF, Add	*35.68*	
		For >7 CLF, Deduct	*-40.67*	
07 92 13 00-0071	CLF	1/2" x 1/2" Joint, Flexible Polyurethane Security Sealant And Caulking	591.58	138.50
		For Up To 1.4 CLF, Add	*34.02*	
		For >7.5 CLF, Deduct	*-38.45*	
07 92 13 00-0072	CLF	1/2" x 5/8" Joint, Flexible Polyurethane Security Sealant And Caulking	650.23	142.79
		For Up To 1.15 CLF, Add	*38.06*	
		For >6 CLF, Deduct	*-43.60*	
07 92 13 00-0073	CLF	1/2" x 3/4" Joint, Flexible Polyurethane Security Sealant And Caulking	694.60	142.79
		For Up To 1 CLF, Add	*41.39*	
		For >5 CLF, Deduct	*-48.04*	
07 92 13 00-0074	CLF	1/2" x 7/8" Joint, Flexible Polyurethane Security Sealant And Caulking	753.24	147.07
		For Up To 0.8 CLF, Add	*45.43*	
		For >4.5 CLF, Deduct	*-53.19*	
07 92 13 00-0075	CLF	1/2" x 1" Joint, Flexible Polyurethane Security Sealant And Caulking	811.89	152.78
		For Up To 0.75 CLF, Add	*49.47*	
		For >4 CLF, Deduct	*-58.34*	
07 92 13 00-0076	CLF	3/4" x 3/4" Joint, Flexible Polyurethane Security Sealant And Caulking	870.54	157.07
		For Up To 0.65 CLF, Add	*53.51*	
		For >3.5 CLF, Deduct	*-63.49*	
07 92 13 00-0077	CLF	3/4" x 1" Joint, Flexible Polyurethane Security Sealant And Caulking	1,046.49	171.35
		For Up To 0.5 CLF, Add	*65.64*	
		For >2.5 CLF, Deduct	*-78.95*	

07 92 19 Acoustical Joint Sealants *(07 92)*

07 92 19 00-0001 Acoustical Sealant *(07 92 19)*

07 92 19 00-0002	CLF	1/4" x 1/4" Joint, Acoustical Sealant	439.50	128.51
		For Custom Match Coloring, Add	*12.95*	
		For Up To 6 CLF, Add	*23.32*	
		For >30 CLF, Deduct	*-24.67*	
		For 1 Part Mildew Resistant, Add	*18.89*	
		For High-Modulus Non-Acid Curing, Add	*10.79*	
07 92 19 00-0003	CLF	1/4" x 3/8" Joint, Acoustical Sealant	459.99	128.51
		For Custom Match Coloring, Add	*17.87*	
		For Up To 4 CLF, Add	*24.86*	
		For >20 CLF, Deduct	*-26.72*	
		For 1 Part Mildew Resistant, Add	*26.06*	
		For High-Modulus Non-Acid Curing, Add	*14.89*	
07 92 19 00-0004	CLF	1/4" x 1/2" Joint, Acoustical Sealant	486.35	132.79
		For Custom Match Coloring, Add	*20.77*	
		For Up To 3 CLF, Add	*26.48*	
		For >15 CLF, Deduct	*-28.64*	
		For 1 Part Mildew Resistant, Add	*30.29*	
		For High-Modulus Non-Acid Curing, Add	*17.31*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
07 92 19 00-0005	CLF	3/8" x 3/8" Joint, Acoustical Sealant	519.88	132.79
		For Custom Match Coloring, Add	*28.82*	
		For Up To 2.5 CLF, Add	*29.00*	
		For >13 CLF, Deduct	*-32.00*	
		For 1 Part Mildew Resistant, Add	*42.02*	
		For High-Modulus Non-Acid Curing, Add	*24.01*	
07 92 19 00-0006	CLF	3/8" x 1/2" Joint, Acoustical Sealant	554.74	132.79
		For Custom Match Coloring, Add	*37.18*	
		For Up To 2 CLF, Add	*31.61*	
		For >10 CLF, Deduct	*-35.48*	
		For 1 Part Mildew Resistant, Add	*54.23*	
		For High-Modulus Non-Acid Curing, Add	*30.99*	
07 92 19 00-0007	CLF	1/2" x 1/2" Joint, Acoustical Sealant	632.41	138.50
		For Custom Match Coloring, Add	*52.40*	
		For Up To 1.4 CLF, Add	*37.08*	
		For >7.5 CLF, Deduct	*-42.54*	
		For 1 Part Mildew Resistant, Add	*76.41*	
		For High-Modulus Non-Acid Curing, Add	*43.66*	

07 95 Expansion Control *(07 90)*

07 95 13 Expansion Joint Cover Assemblies *(07 95)*

Note: Includes necessary waterproofing mastics/caulking.

07 95 13 13 Interior Expansion Joint Cover Assemblies *(07 95 13)*

07 95 13 13-0001 Interior Floor Expansion Joint Cover Assemblies *(07 95 13 13)*

07 95 13 13-0002 With 1" Space *(07 95 13 13-0001)*

07 95 13 13-0003	LF	1" Opening Floor Assembly Type, With Aluminum Expansion Joint Cover	95.75	7.19
07 95 13 13-0004	LF	1" Opening Floor Assembly Type, With Bronze Expansion Joint Cover	47.18	7.19
07 95 13 13-0005	LF	1" Opening Floor Assembly Type, With Stainless Steel Expansion Joint Cover	97.55	7.19

07 95 13 13-0006 With 2" Space *(07 95 13 13-0001)*

07 95 13 13-0007	LF	2" Opening Floor Assembly Type, Aluminum Expansion Joint Cover	131.00	7.19
07 95 13 13-0008	LF	2" Opening Floor Assembly Type, Bronze Expansion Joint Cover	54.48	7.19
07 95 13 13-0009	LF	2" Opening Floor Assembly Type, Stainless Steel Expansion Joint Cover	133.70	7.19

07 95 13 13-0010 Interior Ceiling And Wall Expansion Joint Cover Assemblies *(07 95 13 13)*

07 95 13 13-0011 With 1" Space *(07 95 13 13-0010)*

07 95 13 13-0012	LF	1" Opening Ceiling And Wall Assembly Type, Aluminum Expansion Joint Cover	66.76	7.19
07 95 13 13-0013	LF	1" Opening Ceiling And Wall Assembly Type, Bronze Expansion Joint Cover	46.13	7.19
07 95 13 13-0014	LF	1" Opening Ceiling And Wall Assembly Type, Stainless Steel Expansion Joint Cover	85.73	7.19

07 95 13 13-0015 With 2" Space *(07 95 13 13-0010)*

07 95 13 13-0016	LF	2" Opening Ceiling And Wall Assembly Type, Aluminum Expansion Joint Cover	87.91	7.19
07 95 13 13-0017	LF	2" Opening Ceiling And Wall Assembly Type, Bronze Expansion Joint Cover	49.77	7.19
07 95 13 13-0018	LF	2" Opening Ceiling And Wall Assembly Type, Stainless Steel Expansion Joint Cover	103.80	7.19

07 95 13 16 Exterior Expansion Joint Cover Assemblies *(07 95 13)*

07 95 13 16-0001 Exterior Roof Aluminum Expansion Joint Cover Assemblies *(07 95 13 16)*

07 95 13 16-0002 Roof To Roof *(07 95 13 16-0001)*

07 95 13 16-0003	LF	1" Opening Aluminum Assemblies, Exterior Roof To Roof Expansion Joint	135.04	4.79
07 95 13 16-0004	LF	2" Opening Aluminum Assemblies, Exterior Roof To Roof Expansion Joint	164.70	4.79
07 95 13 16-0005	LF	3" Opening Aluminum Assemblies, Exterior Roof To Roof Expansion Joint	185.13	4.79

07 95 13 16-0006 Roof To Wall *(07 95 13 16-0001)*

07 95 13 16-0007	LF	1" Opening Aluminum Assemblies, Exterior Roof To Wall Expansion Joint	97.47	4.79
07 95 13 16-0008	LF	2" Opening Aluminum Assemblies, Exterior Roof To Wall Expansion Joint	133.78	4.79

07 95 13 16-0009 Flat Wall To Wall *(07 95 13 16-0001)*

07 95 13 16-0010	LF	1" Opening Aluminum Assemblies, Exterior Wall To Wall Expansion Joint	70.79	4.79
07 95 13 16-0011	LF	2" Opening Aluminum Assemblies, Exterior Wall To Wall Expansion Joint	92.58	4.79
07 95 13 16-0012	LF	3" Opening Aluminum Assemblies, Exterior Wall To Wall Expansion Joint	118.87	4.79

07 95 13 16-0013 Corner To Flat Wall *(07 95 13 16-0001)*

07 95 13 16-0014	LF	1" Opening Aluminum Assemblies, Exterior Corner To Wall Expansion Joint	65.35	4.79
07 95 13 16-0015	LF	2" Opening Aluminum Assemblies, Exterior Corner To Wall Expansion Joint	79.87	4.79
07 95 13 16-0016	LF	3" Opening Aluminum Assemblies, Exterior Corner To Wall Expansion Joint	120.69	4.79

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

END OF SECTION 07

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

THIS PAGE INTENTIONALLY LEFT BLANK

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

09 Finishes

09 01 Maintenance of Finishes *(09)*

09 01 20 Maintenance of Plaster and Gypsum Board *(09 01)*

09 01 20 91 Plaster Restoration *(09 01 20)*

09 01 20 91-0001 Cut And Patch Hole In Gypsum Board To Match Existing *(09 01 20 91)*
Note: Includes cutting of existing gypsum board, cutting new board to fit opening, taping, gypsum board finishing, and disposal of debris into dumpster. Per location. See CSI section 09 29 00 00-0000 for "Gypsum Board" repairs > 32 SF.

09 01 20 91-0002	SF	Up To 2 SF, Cut And Patch Hole In Gypsum Board To Match Existing Note: Per location.	24.50
09 01 20 91-0003	SF	>2 To 4 SF, Cut And Patch Hole In Gypsum Board To Match Existing Note: Per location.	19.78
09 01 20 91-0004	SF	>4 To 8 SF, Cut And Patch Hole In Gypsum Board To Match Existing Note: Per location.	17.76
09 01 20 91-0005	SF	>8 To 16 SF, Cut And Patch Hole In Gypsum Board To Match Existing Note: Per location.	15.64
09 01 20 91-0006	SF	>16 To 32 SF, Cut And Patch Hole In Gypsum Board To Match Existing Note: Per location. See CSI section 09 29 10 00-0001 for "Gypsum Board" repairs > 32 SF.	14.00

09 01 20 91-0007 Patch/Finish Gypsum Board To Match Existing *(09 01 20 91)*
Note: Includes taping, gypsum board finishing. Per location. See CSI section 09 01 20 91-0001 for patching walls requiring gypsum board to be cut and installed.

09 01 20 91-0008	EA	Tape, Spackle And Finish Gypsum Board To Patch/Finish Small Diameter Holes Or Screw Head Pops	2.35
		For ASTM C840 Level 1 Finish, Deduct	*-1.14*
		For ASTM C840 Level 2 Finish, Deduct	*-0.57*
		For ASTM C840 Level 3 Finish, Deduct	*-0.23*
		For ASTM C840 Level 5 High Quality Finish, Add	*1.74*

09 01 20 91-0009 Plaster/Stucco Repair *(09 01 20 91)*
Note: Per location.

09 01 20 91-0010 Clean And Repair Crack In Plaster/Stucco *(09 01 20 91-0009)*
Note: Includes plaster weld.

09 01 20 91-0011	LF	Up To 10', Chip, Clean And Repair Crack In Plaster/Stucco	23.91
09 01 20 91-0012	LF	>10' To 50', Chip, Clean And Repair Crack In Plaster/Stucco	19.19
09 01 20 91-0013	LF	>50' To 100', Chip, Clean And Repair Crack In Plaster/Stucco	15.65
09 01 20 91-0014	LF	>100' To 250', Chip, Clean And Repair Crack In Plaster/Stucco	12.10
09 01 20 91-0015	LF	>250' To 500', Chip, Clean And Repair Crack In Plaster/Stucco	9.73
09 01 20 91-0016	LF	>500', Chip, Clean And Repair Crack In Plaster/Stucco	7.37

09 01 20 91-0017 Cut And Patch Hole In Plaster/Stucco To Match Existing *(09 01 20 91-0009)*
Note: Includes plaster weld.

09 01 20 91-0018	SF	Up To 10 SF, Cut And Patch Hole In Plaster To Match Existing	22.77
09 01 20 91-0019	SF	>10 To 50 SF, Cut And Patch Hole In Plaster To Match Existing	20.14
09 01 20 91-0020	SF	>50 To 100 SF, Cut And Patch Hole In Plaster To Match Existing	18.56
09 01 20 91-0021	SF	>100 To 250 SF, Cut And Patch Hole In Plaster To Match Existing	17.23
09 01 20 91-0022	SF	>250 To 500 SF, Cut And Patch Hole In Plaster To Match Existing	16.08
09 01 20 91-0023	SF	>500 SF, Cut And Patch Hole In Plaster To Match Existing	14.80

09 01 20 91-0024 Chip, Clean And Repair Plaster/Stucco *(09 01 20 91-0009)*
Note: Includes plaster weld.

09 01 20 91-0025	SF	Up To 10 SF, Chip, Clean And Repair Plaster/Stucco	43.03
09 01 20 91-0026	SF	>10 To 50 SF, Chip, Clean And Repair Plaster/Stucco	31.21
09 01 20 91-0027	SF	>50 To 250 SF, Chip, Clean And Repair Plaster/Stucco	22.94
09 01 20 91-0028	SF	>250 SF, Chip, Clean And Repair Plaster/Stucco	18.21

09 01 30 Maintenance of Tiling *(09 01)*

09 01 30 91 Tile Restoration *(09 01 30)*

09 01 30 91-0001	SF	Regrout Floor Tile Including Removal Of Loose Grout	8.84
09 01 30 91-0002	SF	Regrout Wall Tile Including Removal Of Loose Grout	11.02
09 01 30 91-0003	SF	Up To 1 SF, Cut And Patch Hole In Wall Tile To Match Existing Note: Per location.	56.32

09 01 50 Maintenance of Ceilings *(09 01)*

09 01 50 91 Ceiling Restoration *(09 01 50)*

09 01 50 91-0001 Repair Ceiling Suspension System *(09 01 50 91)*
See CSI section 09 53 23 00-0009 for ceiling suspension system accessories for replacement.

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

09 01 60 Maintenance of Flooring *(09 01)*

09 01 60 91 Flooring Restoration *(09 01 60)*

09 01 60 91-0001 Grinding, Polishing And Sealing Terrazzo *(09 01 60 91)*

09 01 60 91-0002	CSF	Grinding, Polishing And Sealing Existing Terrazzo	376.10
09 01 60 91-0003	SF	Removal Of Setting Bed And Clean Area For Terrazzo Repair	5.79
09 01 60 91-0004	SF	Repair Existing Terrazzo	25.08
09 01 60 91-0005	LF	Repair Cracks In Existing Terrazzo	5.87

09 01 60 91-0006 Standard Flooring Maintenance *(09 01 60 91)*

09 01 60 91-0007	CSF	Steam Clean Carpet	49.30
09 01 60 91-0008	CSF	Wax And Polish Tile And VCT Flooring	54.52
		For Additional Coat, Add	*45.70*
		For Stripping Existing Wax From Floor, Add	*52.10*
09 01 60 91-0009	CSF	Wax And Polish Wood Flooring	33.60
		For Additional Coat, Add	*29.68*
		For Stripping Existing Wax From Floor, Add	*52.10*
09 01 60 91-0010	MSF	Vacuum Floors	27.28

09 01 60 91-0011 Prepare Existing Concrete Floor Prior To Installation Of Flooring *(09 01 60 91)*

09 01 60 91-0012	SY	Grinding Of Existing Concrete Floor Prior To Installation Of Flooring Note: Up to 1/8" of material per pass	10.61
09 01 60 91-0013	LF	Up To 6" Wide, Hand Detail Work/Grinding At Wall Of Existing Concrete Floor Prior To Installation Of Flooring Note: Up to 1/4" of material per pass	20.87
09 01 60 91-0014	SY	Chemical Prepare Existing Concrete Floor Prior To Installation Of Flooring	8.55

09 01 60 91-0015 Floor Sealants *(09 01 60 91)*

09 01 60 91-0016	SF	Water-Based Emulsion, Masonry/Tile/Stone/Terrazzo Floor Sealant/Finish, Per Coat Note: For terrazzo, concrete, quarry tile, brick and unglazed ceramic tile.	1.48
09 01 60 91-0017	SF	Water-Based, Clear Acrylic, Concrete Floor Sealant/Finish, Per Coat Note: For interior/exterior concrete surfaces.	1.61
09 01 60 91-0018	SF	Fluorochemical Acrylate Copolymer Masonry/Tile/Stone/Terrazzo Floor Sealant	1.82
09 01 60 91-0019	GAL	Masonry/Tile/Stone/Terrazzo Floor Sealant (Extra To Be Provided To Owner)	37.89

09 01 80 Maintenance of Acoustic Treatment *(09 01)*

09 01 80 00-0001 Removal Of Acoustical Ceiling Treatment *(09 01 80)*

09 01 80 00-0002	SF	Removal Of Acoustical And Popcorn Ceilings Treatment	3.06

09 01 90 Maintenance of Painting and Coating *(09 01)*

09 01 90 52 Maintenance Repainting *(09 01 90)*

09 01 90 52-0001 Cleaning And Preparation Of Painted And Unpainted Surfaces *(09 01 90 52)*

Note: In excess of surface preparation required. Water blast and pressure washing includes mild detergent and rinsing of surface until detergent free. Media blast and water blast includes canvas/plastic for protection of existing surfaces as well as for containment and collection.

09 01 90 52-0002 Concrete, Stone And Masonry Surfaces, Surface Preparation *(09 01 90 52-0001)*

09 01 90 52-0003	SF	Trisodium Phosphate (TSP), Clean Concrete, Stone Or Masonry Surfaces, Surface Preparation	0.52
		For Up To 100, Add	*0.38*
		For >100 To 250, Add	*0.18*
		For >250 To 500, Add	*0.08*
		For >5,000 To 10,000, Deduct	*-0.03*
		For >10,000 To 15,000, Deduct	*-0.05*
		For >15,000 To 30,000, Deduct	*-0.08*
		For >30,000, Deduct	*-0.10*
09 01 90 52-0004	SF	Calcimine Removal/Washing, Concrete, Stone And Masonry Surfaces, Surface Preparation	0.53
		For Up To 100, Add	*0.93*
		For >100 To 250, Add	*0.24*
		For >250 To 500, Add	*0.12*
		For >5,000 To 10,000, Deduct	*-0.02*
		For >10,000 To 15,000, Deduct	*-0.05*
		For >15,000 To 30,000, Deduct	*-0.08*
		For >30,000, Deduct	*-0.10*
09 01 90 52-0005	SF	Chemical Clean, Brush And Wash, Concrete, Stone And Masonry Surfaces, Surface Preparation	0.85
		For Up To 100, Add	*1.43*
		For >100 To 250, Add	*0.38*
		For >250 To 500, Add	*0.19*
		For >5,000 To 10,000, Deduct	*-0.04*
		For >10,000 To 15,000, Deduct	*-0.08*
		For >15,000 To 30,000, Deduct	*-0.12*
		For >30,000, Deduct	*-0.16*

copyright 2026 The Gordian Group, Inc.

CSI	MINOR UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 01 90 52-0006	SF	Hand Scrape, Concrete And Masonry Surfaces, Surface Preparation	1.33	
		For Up To 100, Add	*2.66*	
		For >100 To 250, Add	*0.67*	
		For >250 To 500, Add	*0.33*	
		For >5,000 To 10,000, Deduct	*-0.07*	
		For >10,000 To 15,000, Deduct	*-0.13*	
		For >15,000 To 30,000, Deduct	*-0.20*	
		For >30,000, Deduct	*-0.27*	
09 01 90 52-0007	SF	Steam Clean, Concrete, Stone And Masonry Surfaces, Surface Preparation	0.90	
		For Up To 100, Add	*1.56*	
		For >100 To 250, Add	*0.41*	
		For >250 To 500, Add	*0.20*	
		For >5,000 To 10,000, Deduct	*-0.04*	
		For >10,000 To 15,000, Deduct	*-0.08*	
		For >15,000 To 30,000, Deduct	*-0.13*	
		For >30,000, Deduct	*-0.17*	
09 01 90 52-0008	SF	2,000 To 5,000 PSI Pressure Wash, Concrete, Stone And Masonry Surfaces, Surface Preparation	0.58	
		For Up To 100, Add	*0.95*	
		For >100 To 250, Add	*0.26*	
		For >250 To 500, Add	*0.12*	
		For >5,000 To 10,000, Deduct	*-0.03*	
		For >10,000 To 15,000, Deduct	*-0.05*	
		For >15,000 To 30,000, Deduct	*-0.08*	
		For >30,000, Deduct	*-0.11*	
09 01 90 52-0009	SF	10,000 To 12,000 PSI Water Blast, Concrete, Stone And Masonry Surfaces, Surface Preparation	1.61	
		For Up To 100, Add	*2.91*	
		For >100 To 250, Add	*0.75*	
		For >250 To 500, Add	*0.37*	
		For >5,000 To 10,000, Deduct	*-0.08*	
		For >10,000 To 15,000, Deduct	*-0.15*	
		For >15,000 To 30,000, Deduct	*-0.24*	
		For >30,000, Deduct	*-0.31*	
09 01 90 52-0010	SF	30,000 To 40,000 PSI Water Blast, Concrete, Stone And Masonry Surfaces, Surface Preparation	2.66	
		For Up To 100, Add	*5.01*	
		For >100 To 250, Add	*1.28*	
		For >250 To 500, Add	*0.63*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 15,000, Deduct	*-0.26*	
		For >15,000 To 30,000, Deduct	*-0.39*	
		For >30,000, Deduct	*-0.52*	
09 01 90 52-0011	SF	Abrasive Glass Media Blasting, Concrete And Masonry Surfaces, Surface Preparation Note: 3 Lb. of sand or glass abrasive media material per SF	4.17	
		For 4.5 Lb. Of Abrasive Media Material per SF, Where Multiple Pass Is Required, Add	*2.43*	
		For 6 Lb. Of Abrasive Media Material per SF, Where Multiple Pass Is Required, Add	*5.02*	
		For 9 Lb. Of Abrasive Media Material per SF, Where Multiple Pass Is Required, Add	*8.34*	
		For Up To 100, Add	*7.20*	
		For >100 To 250, Add	*1.90*	
		For >250 To 500, Add	*0.93*	
		For >5,000 To 10,000, Deduct	*-0.19*	
		For >10,000 To 15,000, Deduct	*-0.39*	
		For >15,000 To 30,000, Deduct	*-0.60*	
		For >30,000, Deduct	*-0.80*	

09 01 90 52-0012 Drywall Surfaces, Surface Preparation *(09 01 90 52-0001)*

See CSI section 09 01 20 91-0007 for Patch holes other than nail/screw holes and greater than 1/2" diameter.

09 01 90 52-0013	SF	Hand Wash Drywall Surfaces With Mild Detergent Or Degreaser (No Sanding, Repairing Or Scraping), Surface Preparation	0.40	
		For Up To 100, Add	*0.80*	
		For >100 To 250, Add	*0.20*	
		For >250 To 500, Add	*0.10*	
09 01 90 52-0014	SF	Hand Wash, Minor Repair And Light Sanding Drywall Surfaces, Surface Preparation	0.68	
		For Up To 100, Add	*1.36*	
		For >100 To 250, Add	*0.34*	
		For >250 To 500, Add	*0.17*	
09 01 90 52-0015	SF	Hand Scrape, Repair And Sand Severely Damaged Drywall Surfaces, Surface Preparation	1.28	
		For Up To 100, Add	*2.44*	
		For >100 To 250, Add	*0.62*	
		For >250 To 500, Add	*0.31*	

09 01 90 52-0016 Metal Surfaces, Surface Preparation *(09 01 90 52-0001)*

09 01 90 52-0017	SF	Trisodium Phosphate (TSP), Clean Metal Surfaces, Surface Preparation	0.50	
		For Up To 100, Add	*0.36*	
		For >100 To 250, Add	*0.17*	
		For >250 To 500, Add	*0.07*	
		For >5,000 To 10,000, Deduct	*-0.02*	
		For >10,000 To 15,000, Deduct	*-0.05*	
		For >15,000 To 30,000, Deduct	*-0.07*	
		For >30,000, Deduct	*-0.10*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 01 90 52-0018	SF	Chemical Clean, Brush And Wash, Metal Surfaces, Surface Preparation	0.85	
		For Up To 100, Add	*0.50*	
		For >100 To 250, Add	*0.23*	
		For >250 To 500, Add	*0.10*	
		For >5,000 To 10,000, Deduct	*-0.04*	
		For >10,000 To 15,000, Deduct	*-0.08*	
		For >15,000 To 30,000, Deduct	*-0.12*	
		For >30,000, Deduct	*-0.16*	
09 01 90 52-0019	SF	Hand Scraping And Sanding, Metal Surfaces, Surface Preparation	1.08	
		For Up To 100, Add	*0.81*	
		For >100 To 250, Add	*0.38*	
		For >250 To 500, Add	*0.16*	
		For >5,000 To 10,000, Deduct	*-0.05*	
		For >10,000 To 15,000, Deduct	*-0.11*	
		For >15,000 To 30,000, Deduct	*-0.16*	
		For >30,000, Deduct	*-0.22*	
09 01 90 52-0020	SF	2,000 To 5,000 PSI Pressure Wash, Metal Surfaces, Surface Preparation	0.55	
		For Up To 100, Add	*0.33*	
		For >100 To 250, Add	*0.15*	
		For >250 To 500, Add	*0.07*	
		For >5,000 To 10,000, Deduct	*-0.03*	
		For >10,000 To 15,000, Deduct	*-0.05*	
		For >15,000 To 30,000, Deduct	*-0.08*	
		For >30,000, Deduct	*-0.10*	
09 01 90 52-0021	SF	Power Tool Cleaning, Metal Surfaces, Surface Preparation	1.47	
		For Up To 100, Add	*1.10*	
		For >100 To 250, Add	*0.51*	
		For >250 To 500, Add	*0.22*	
		For >5,000 To 10,000, Deduct	*-0.07*	
		For >10,000 To 15,000, Deduct	*-0.15*	
		For >15,000 To 30,000, Deduct	*-0.22*	
		For >30,000, Deduct	*-0.29*	
09 01 90 52-0022	SF	Steam Cleaning, Metal Surfaces, Surface Preparation	0.56	
		For Up To 100, Add	*0.30*	
		For >100 To 250, Add	*0.14*	
		For >250 To 500, Add	*0.06*	
		For >5,000 To 10,000, Deduct	*-0.02*	
		For >10,000 To 15,000, Deduct	*-0.05*	
		For >15,000 To 30,000, Deduct	*-0.08*	
		For >30,000, Deduct	*-0.10*	
09 01 90 52-0023	SF	Loose Mill Scale With Fine Powder, Commercial Blast, Metal Surfaces, Surface Preparation	1.23	
		For Up To 100, Add	*0.76*	
		For >100 To 250, Add	*0.35*	
		For >250 To 500, Add	*0.15*	
		For >5,000 To 10,000, Deduct	*-0.06*	
		For >10,000 To 15,000, Deduct	*-0.11*	
		For >15,000 To 30,000, Deduct	*-0.18*	
		For >30,000, Deduct	*-0.24*	
09 01 90 52-0024	SF	Tight Mill Scale With Fine Powder Rust, Commercial Blast, Metal Surfaces, Surface Preparation	1.69	
		For Up To 100, Add	*1.02*	
		For >100 To 250, Add	*0.48*	
		For >250 To 500, Add	*0.20*	
		For >5,000 To 10,000, Deduct	*-0.08*	
		For >10,000 To 15,000, Deduct	*-0.16*	
		For >15,000 To 30,000, Deduct	*-0.24*	
		For >30,000, Deduct	*-0.32*	
09 01 90 52-0025	SF	Exterior Coating Blistered Pitted, Rust, Commercial Blast, Metal Surfaces, Surface Preparation	2.48	
		For Up To 100, Add	*1.53*	
		For >100 To 250, Add	*0.71*	
		For >250 To 500, Add	*0.31*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 15,000, Deduct	*-0.23*	
		For >15,000 To 30,000, Deduct	*-0.36*	
		For >30,000, Deduct	*-0.47*	
09 01 90 52-0026	SF	Badly Pitted With Rust Nodules, Commercial Blast, Metal Surfaces, Surface Preparation	4.13	
		For Up To 100, Add	*2.54*	
		For >100 To 250, Add	*1.19*	
		For >250 To 500, Add	*0.51*	
		For >5,000 To 10,000, Deduct	*-0.19*	
		For >10,000 To 15,000, Deduct	*-0.38*	
		For >15,000 To 30,000, Deduct	*-0.60*	
		For >30,000, Deduct	*-0.79*	
09 01 90 52-0027	SF	Loose Mill Scale With Fine Powder Rust, Near White Blast, Metal Surfaces, Surface Preparation	3.14	
		For Up To 100, Add	*1.91*	
		For >100 To 250, Add	*0.89*	
		For >250 To 500, Add	*0.38*	
		For >5,000 To 10,000, Deduct	*-0.15*	
		For >10,000 To 15,000, Deduct	*-0.29*	
		For >15,000 To 30,000, Deduct	*-0.45*	
		For >30,000, Deduct	*-0.60*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 01 90 52-0028	SF	Tight Mill Scale Little Rust, Near White Blast, Metal Surfaces, Surface Preparation	3.90	
		For Up To 100, Add	*2.35*	
		For >100 To 250, Add	*1.10*	
		For >250 To 500, Add	*0.47*	
		For >5,000 To 10,000, Deduct	*-0.18*	
		For >10,000 To 15,000, Deduct	*-0.36*	
		For >15,000 To 30,000, Deduct	*-0.56*	
		For >30,000, Deduct	*-0.74*	
09 01 90 52-0029	SF	Exterior Coat Blistered Pitted Rust, Near White Blast, Metal Surfaces, Surface Preparation	5.04	
		For Up To 100, Add	*3.05*	
		For >100 To 250, Add	*1.42*	
		For >250 To 500, Add	*0.61*	
		For >5,000 To 10,000, Deduct	*-0.23*	
		For >10,000 To 15,000, Deduct	*-0.46*	
		For >15,000 To 30,000, Deduct	*-0.73*	
		For >30,000, Deduct	*-0.96*	
09 01 90 52-0030	SF	Badly Pitted Rust Nodules, Near White Blast, Metal Surfaces, Surface Preparation	6.31	
		For Up To 100, Add	*3.81*	
		For >100 To 250, Add	*1.78*	
		For >250 To 500, Add	*0.76*	
		For >5,000 To 10,000, Deduct	*-0.29*	
		For >10,000 To 15,000, Deduct	*-0.58*	
		For >15,000 To 30,000, Deduct	*-0.91*	
		For >30,000, Deduct	*-1.20*	

09 01 90 52-0031 Tile Surfaces, Surface Preparation *(09 01 90 52-0001)*

09 01 90 52-0032	SF	Trisodium Phosphate (TSP), Clean Tile Surfaces, Surface Preparation	0.46	
		For Up To 100, Add	*0.33*	
		For >100 To 250, Add	*0.15*	
		For >250 To 500, Add	*0.07*	
		For >5,000 To 10,000, Deduct	*-0.02*	
		For >10,000 To 15,000, Deduct	*-0.05*	
		For >15,000 To 30,000, Deduct	*-0.07*	
		For >30,000, Deduct	*-0.09*	
09 01 90 52-0033	CSF	Chemical Alkaline Cleaner, Brush And Wash Tile Surfaces, Surface Preparation	45.18	
		For Up To 100, Add	*33.60*	
		For >100 To 250, Add	*15.68*	
		For >250 To 500, Add	*6.72*	
		For >5,000 To 10,000, Deduct	*-2.25*	
		For >10,000 To 15,000, Deduct	*-4.50*	
		For >15,000 To 30,000, Deduct	*-6.77*	
		For >30,000, Deduct	*-9.02*	
09 01 90 52-0034	SF	2,000 To 5,000 PSI, Pressure Wash Tile Surfaces, Surface Preparation	0.40	
		For Up To 100, Add	*0.25*	
		For >100 To 250, Add	*0.12*	
		For >250 To 500, Add	*0.05*	
		For >5,000 To 10,000, Deduct	*-0.02*	
		For >10,000 To 15,000, Deduct	*-0.04*	
		For >15,000 To 30,000, Deduct	*-0.06*	
		For >30,000, Deduct	*-0.08*	

09 01 90 52-0035 Wood Surfaces, Surface Preparation *(09 01 90 52-0001)*

09 01 90 52-0036	SF	Prepare New Wood Floor For Finish, Multi Grit Sanding/Screening	1.89	
		For Up To 100, Add	*1.34*	
		For >100 To 250, Add	*0.63*	
		For >250 To 500, Add	*0.27*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 15,000, Deduct	*-0.19*	
		For >15,000 To 30,000, Deduct	*-0.28*	
		For >30,000, Deduct	*-0.37*	
09 01 90 52-0037	SF	Trisodium Phosphate (TSP), Clean Wood Surfaces, Surface Preparation	0.48	
		For Up To 100, Add	*0.35*	
		For >100 To 250, Add	*0.16*	
		For >250 To 500, Add	*0.07*	
		For >5,000 To 10,000, Deduct	*-0.02*	
		For >10,000 To 15,000, Deduct	*-0.05*	
		For >15,000 To 30,000, Deduct	*-0.07*	
		For >30,000, Deduct	*-0.10*	
09 01 90 52-0038	SF	Chemical Clean, Brush And Wash Wood Surfaces, Surface Preparation	0.71	
		For Up To 100, Add	*0.40*	
		For >100 To 250, Add	*0.19*	
		For >250 To 500, Add	*0.08*	
		For >5,000 To 10,000, Deduct	*-0.03*	
		For >10,000 To 15,000, Deduct	*-0.06*	
		For >15,000 To 30,000, Deduct	*-0.10*	
		For >30,000, Deduct	*-0.13*	
09 01 90 52-0039	SF	Hand Scrape Wood Surfaces, Surface Preparation	0.96	
		For Up To 100, Add	*0.72*	
		For >100 To 250, Add	*0.34*	
		For >250 To 500, Add	*0.14*	
		For >5,000 To 10,000, Deduct	*-0.05*	
		For >10,000 To 15,000, Deduct	*-0.10*	
		For >15,000 To 30,000, Deduct	*-0.14*	
		For >30,000, Deduct	*-0.19*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 01 90 52-0040	SF	Steam Clean Wood Surfaces, Surface Preparation	0.88	
		For Up To 100, Add	*0.54*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >5,000 To 10,000, Deduct	*-0.04*	
		For >10,000 To 15,000, Deduct	*-0.08*	
		For >15,000 To 30,000, Deduct	*-0.13*	
		For >30,000, Deduct	*-0.17*	
09 01 90 52-0041	SF	2,000 To 5,000 PSI, Pressure Wash Wood Surfaces, Surface Preparation	0.60	
		For Up To 100, Add	*0.37*	
		For >100 To 250, Add	*0.17*	
		For >250 To 500, Add	*0.07*	
		For >5,000 To 10,000, Deduct	*-0.03*	
		For >10,000 To 15,000, Deduct	*-0.06*	
		For >15,000 To 30,000, Deduct	*-0.09*	
		For >30,000, Deduct	*-0.11*	
09 01 90 52-0042	SF	Sanding Wood Paneling, Boards, Doors Or Other Wood Surfaces, Surface Preparation	0.95	
		For Up To 100, Add	*0.65*	
		For >100 To 250, Add	*0.30*	
		For >250 To 500, Add	*0.13*	
		For >5,000 To 10,000, Deduct	*-0.05*	
		For >10,000 To 15,000, Deduct	*-0.09*	
		For >15,000 To 30,000, Deduct	*-0.14*	
		For >30,000, Deduct	*-0.19*	
09 01 90 52-0043	SF	Sanding Wood Trim Surfaces, Surface Preparation	1.28	
		For Up To 100, Add	*0.90*	
		For >100 To 250, Add	*0.42*	
		For >250 To 500, Add	*0.18*	
		For >5,000 To 10,000, Deduct	*-0.06*	
		For >10,000 To 15,000, Deduct	*-0.12*	
		For >15,000 To 30,000, Deduct	*-0.19*	
		For >30,000, Deduct	*-0.25*	
09 01 90 52-0044	SF	Prime Wood Surfaces With Linseed Oil, 1 Coat, Surface Preparation	0.85	
		For Up To 100, Add	*0.53*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >5,000 To 10,000, Deduct	*-0.04*	
		For >10,000 To 15,000, Deduct	*-0.08*	
		For >15,000 To 30,000, Deduct	*-0.12*	
		For >30,000, Deduct	*-0.16*	
09 01 90 52-0045	SF	Paint Wood Surfaces With Linseed Oil, 1 Coat, Surface Preparation	0.98	
		For Up To 100, Add	*0.63*	
		For >100 To 250, Add	*0.29*	
		For >250 To 500, Add	*0.13*	
		For >5,000 To 10,000, Deduct	*-0.05*	
		For >10,000 To 15,000, Deduct	*-0.09*	
		For >15,000 To 30,000, Deduct	*-0.14*	
		For >30,000, Deduct	*-0.19*	

09 01 90 52-0046 Vinyl Siding Surfaces, Surface Preparation *(09 01 90 52-0001)*

09 01 90 52-0047	SF	Trisodium Phosphate (TSP), Clean, Vinyl Siding Surfaces, Surface Preparation	0.46	
		For Up To 100, Add	*0.33*	
		For >100 To 250, Add	*0.15*	
		For >250 To 500, Add	*0.07*	
		For >5,000 To 10,000, Deduct	*-0.02*	
		For >10,000 To 15,000, Deduct	*-0.05*	
		For >15,000 To 30,000, Deduct	*-0.07*	
		For >30,000, Deduct	*-0.09*	
09 01 90 52-0048	SF	Hand Wash, Vinyl Siding Surfaces, Surface Preparation	0.72	
		For Up To 100, Add	*0.51*	
		For >100 To 250, Add	*0.24*	
		For >250 To 500, Add	*0.10*	
		For >5,000 To 10,000, Deduct	*-0.04*	
		For >10,000 To 15,000, Deduct	*-0.07*	
		For >15,000 To 30,000, Deduct	*-0.11*	
		For >30,000, Deduct	*-0.14*	
09 01 90 52-0049	SF	2,000 To 5,000 PSI Pressure Wash, Vinyl Siding Surfaces, Surface Preparation	0.51	
		For Up To 100, Add	*0.29*	
		For >100 To 250, Add	*0.13*	
		For >250 To 500, Add	*0.06*	
		For >5,000 To 10,000, Deduct	*-0.02*	
		For >10,000 To 15,000, Deduct	*-0.05*	
		For >15,000 To 30,000, Deduct	*-0.07*	
		For >30,000, Deduct	*-0.10*	
09 01 90 52-0050	SF	Steam Clean, Vinyl Siding Surfaces, Surface Preparation	0.93	
		For Up To 100, Add	*0.54*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >5,000 To 10,000, Deduct	*-0.04*	
		For >10,000 To 15,000, Deduct	*-0.08*	
		For >15,000 To 30,000, Deduct	*-0.13*	
		For >30,000, Deduct	*-0.18*	

copyright 2026 The Gordian Group, Inc.

CSI		MINOR UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 01 90 52-0051			Plaster/Stucco Surfaces, Surface Preparation *(09 01 90 52-0001)*		
			Note: Based on total project quantity.		
09 01 90 52-0052		SF	Trisodium Phosphate (TSP), Clean Plaster/Stucco Surfaces, Surface Preparation	0.52	
			For Up To 100, Add	*0.38*	
			For >100 To 250, Add	*0.18*	
			For >250 To 500, Add	*0.08*	
			For >5,000 To 10,000, Deduct	*-0.03*	
			For >10,000 To 15,000, Deduct	*-0.05*	
			For >15,000 To 30,000, Deduct	*-0.08*	
			For >30,000, Deduct	*-0.10*	
09 01 90 52-0053		SF	2,000 To 5,000 PSI Pressure Wash Plaster/Stucco Surfaces, Surface Preparation	0.65	
			For Up To 100, Add	*0.38*	
			For >100 To 250, Add	*0.18*	
			For >250 To 500, Add	*0.08*	
			For >5,000 To 10,000, Deduct	*-0.03*	
			For >10,000 To 15,000, Deduct	*-0.06*	
			For >15,000 To 30,000, Deduct	*-0.09*	
			For >30,000, Deduct	*-0.12*	
09 01 90 52-0054			Prep Work *(09 01 90 52-0001)*		
09 01 90 52-0055		SF	Citrus Strip, Single Applications	1.27	
			Note: For removal of up to 40 mils each application (average 5 layers at 8 mils per layer) dried latex and oil-based paint, varnish, lacquer, polyurethane and shellac from wood, metal, and masonry surfaces. Multiple applications may be necessary, refer to manufacturer recommendations		
09 01 90 52-0056			Corrosive Inhibitor Sealant For Concrete *(09 01 90 52-0001)*		
09 01 90 52-0057		SF	Corrosive Inhibitor Sealant For Concrete	0.86	
			For Up To 100, Add	*0.42*	
			For >100 To 250, Add	*0.21*	
			For >250 To 500, Add	*0.09*	
09 01 90 61			**Repainting** *(09 01 90)*		
09 01 90 61-0001			Touchup and "Spot" Painting Of Surfaces *(09 01 90 61)*		
			Note: For use on individual areas less than 10 SF.		
09 01 90 61-0002		SF	"Spot" Paint Drywall, Plaster, Wood And Concrete Surfaces, Per Coat	1.60	
09 01 90 91			**Paint Restoration** *(09 01 90)*		
09 01 90 91-0001			Paint Removal, Strip To Bare Wood *(09 01 90 91)*		
09 01 90 91-0002		SF	Flat Surfaces, Paint Removal, Strip To Bare Wood	8.23	
09 01 90 91-0003		SF	Cornices And Decorative Trim To 12" Wide, Paint Removal, Strip To Bare Wood	8.76	

09 05 Common Work Results for Finishes *(09)*

09 05 61 Common Work Results for Flooring Preparation *(09 05)*

09 05 61 13 Moisture Vapor Emission Control *(09 05 61)*

CSI		MINOR UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 05 61 13-0001			Moisture Vapor Reduction System (Koster VAP) *(09 05 61 13)*		
09 05 61 13-0002		SF	Up To 200 SF, Water Vapor Emission Control System (Koster VAP 1-2000)	17.20	
			Note: Clear		
09 05 61 13-0003		SF	>200 To 500 SF, Water Vapor Emission Control System (Koster VAP 1-2000)	13.65	
			Note: Clear		
09 05 61 13-0004		SF	>500 To 1,000 SF, Water Vapor Emission Control System (Koster VAP 1-2000)	9.10	
			Note: Clear		
09 05 61 13-0005		SF	>1,000 To 3,000 SF, Water Vapor Emission Control System (Koster VAP 1-2000)	7.59	
			Note: Clear		
09 05 61 13-0006		SF	>3,000 SF, Water Vapor Emission Control System (Koster VAP 1-2000)	6.06	
			Note: Clear		
09 05 61 13-0007			Moisture Vapor Transmission Control (Dependable Cutdown® II) *(09 05 61 13)*		
09 05 61 13-0008		SF	8# Two Coats, Moisture Vapor Transmission Control (Dependable Cutdown® II)	3.61	
09 05 61 13-0009		SF	15# Two Coats, Moisture Vapor Transmission Control (Dependable Cutdown® II)	4.77	

09 05 71 Acoustic Underlayment *(09 05)*

CSI		MINOR UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 05 71 00-0001			Tile And Stone Acoustical Underlayment *(09 05 71)*		
09 05 71 00-0002		SF	5 Mil Tile And Stone Acoustical Underlayment (EasyMat)	4.85	
			For High-Modulus, Low-Viscosity, High-Strength Chemical Resistant Epoxy Grout, Add	*0.58*	
09 05 71 00-0003			Resilient Floor Acoustical Underlayment *(09 05 71)*		
09 05 71 00-0004		SF	Vinyl, Linoleum, LVT And Vinyl Strip Flooring Acoustical Underlayment (Impacta, Soundseal VC300)	3.27	
09 05 71 00-0005		SF	2 MM Thick Resilient Plank Floor Acoustical Underlayment (Floormuffler)	1.69	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 05 71 00-0006	SF	0.055" Thick High-Density Polyurethane Foam Floor Acoustical Underlayment (Silencer LVT)	1.61	

09 20 Plaster and Gypsum Board *(09)*

09 22 Supports for Plaster and Gypsum Board *(09 20)*

Note: Per SF of wall area measures one side. Do not deduct for opens of less than 25 SF when calculating total wall square footage.

09 22 13 Metal Furring *(09 22)*

09 22 13 13 Metal Channel Furring *(09 22 13)*

09 22 13 13-0001 Hat Furring Channel *(09 22 13 13)*

Note: Includes clips where required.

09 22 13 13-0002 Installed On Walls, Hat Furring Channel *(09 22 13 13-0001)*

09 22 13 13-0003	SF	7/8", 25 Gauge, 16" On Center, Installed On Walls, Hat Furring Channel	5.82	2.19
		For Walls >10' High, Add	*0.66*	
		For 24" On Center, Deduct	*-0.73*	
		For 12" On Center, Add	*0.95*	
		For 22 Gauge, Add	*1.05*	
		For 20 Gauge, Add	*1.61*	
09 22 13 13-0004	SF	1-1/2", 25 Gauge, 16" On Center, Installed On Walls, Hat Furring Channel	6.39	2.19
		For Walls >10' High, Add	*0.66*	
		For 24" On Center, Deduct	*-0.84*	
		For 12" On Center, Add	*1.06*	
		For 22 Gauge, Add	*1.34*	
		For 20 Gauge, Add	*1.99*	

09 22 13 13-0005 Installed On Columns And Beams, Hat Furring Channel *(09 22 13 13-0001)*

09 22 13 13-0006	SF	7/8", 25 Gauge, 16" On Center, Installed On Columns And Beams, Hat Furring Channel	8.18	3.36
		For Columns And Beams >10' High, Add	*1.35*	
		For 24" On Center, Deduct	*-0.96*	
		For 12" On Center, Add	*1.30*	
		For 22 Gauge, Add	*1.23*	
		For 20 Gauge, Add	*1.97*	
09 22 13 13-0007	SF	1-1/2", 25 Gauge, 16" On Center, Installed On Columns And Beams, Hat Furring Channel	8.75	3.36
		For Columns And Beams >10' High, Add	*1.35*	
		For 24" On Center, Deduct	*-1.08*	
		For 12" On Center, Add	*1.41*	
		For 22 Gauge, Add	*1.51*	
		For 20 Gauge, Add	*2.34*	

09 22 13 13-0008 Installed On Ceilings, Hat Furring Channel *(09 22 13 13-0001)*

09 22 13 13-0009	SF	7/8", 25 Gauge, 16" On Center, Installed On Ceilings, Hat Furring Channel	7.79	2.69
		For Ceilings >10' High, Add	*0.81*	
		For 24" On Center, Deduct	*-1.02*	
		For 12" On Center, Add	*1.29*	
		For 22 Gauge, Add	*1.61*	
		For 20 Gauge, Add	*2.40*	
09 22 13 13-0010	SF	1-1/2", 25 Gauge, 16" On Center, Installed On Ceilings, Hat Furring Channel	8.36	2.69
		For Ceilings >10' High, Add	*0.81*	
		For 24" On Center, Deduct	*-1.13*	
		For 12" On Center, Add	*1.40*	
		For 22 Gauge, Add	*1.89*	
		For 20 Gauge, Add	*2.77*	

09 22 13 13-0011 Z Furring Channel *(09 22 13 13)*

09 22 13 13-0012 Installed On Walls, Z Furring Channel *(09 22 13 13-0011)*

09 22 13 13-0013	SF	1", 25 Gauge, 16" On Center, Installed On Walls, Z Furring Channel	4.70	2.19
		For Walls >10' High, Add	*0.66*	
		For 24" On Center, Deduct	*-0.50*	
		For 12" On Center, Add	*0.72*	
		For 22 Gauge, Add	*0.49*	
		For 20 Gauge, Add	*0.87*	
09 22 13 13-0014	SF	1-1/2", 25 Gauge, 16" On Center, Installed On Walls, Z Furring Channel	4.77	2.19
		For Walls >10' High, Add	*0.66*	
		For 24" On Center, Deduct	*-0.52*	
		For 12" On Center, Add	*0.74*	
		For 22 Gauge, Add	*0.53*	
		For 20 Gauge, Add	*0.92*	
09 22 13 13-0015	SF	2", 25 Gauge, 16" On Center, Installed On Walls, Z Furring Channel	4.83	2.19
		For Walls >10' High, Add	*0.66*	
		For 24" On Center, Deduct	*-0.53*	
		For 12" On Center, Add	*0.75*	
		For 22 Gauge, Add	*0.56*	
		For 20 Gauge, Add	*0.96*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 22 13 13-0016	SF	2-1/2", 25 Gauge, 16" On Center, Installed On Walls, Z Furring Channel	4.88	2.19
		For Walls >10' High, Add	*0.66*	
		For 24" On Center, Deduct	*-0.54*	
		For 12" On Center, Add	*0.76*	
		For 22 Gauge, Add	*0.58*	
		For 20 Gauge, Add	*0.99*	
09 22 13 13-0017	SF	3", 25 Gauge, 16" On Center, Installed On Walls, Z Furring Channel	4.92	2.19
		For Walls >10' High, Add	*0.66*	
		For 24" On Center, Deduct	*-0.55*	
		For 12" On Center, Add	*0.77*	
		For 22 Gauge, Add	*0.60*	
		For 20 Gauge, Add	*1.02*	

09 22 13 23 Resilient Channel Furring *(09 22 13)*

09 22 13 23-0001 Single-Leg Resilient Channel, RC1 Furring Channel *(09 22 13 23)*
Note: Includes clips where required.

09 22 13 23-0002 Installed On Walls, Single-Leg Resilient Channel, RC1 Furring Channel *(09 22 13 23-0001)*

09 22 13 23-0003	SF	25 Gauge, 16" On Center, Installed On Walls, Single-Leg Resilient Channel, RC1 Furring Channel	5.08	2.19
		For Walls >10' High, Add	*0.66*	
		For 24" On Center, Deduct	*-0.58*	
		For 12" On Center, Add	*0.80*	
		For 20 Gauge, Add	*1.12*	

09 22 13 23-0004 Installed On Ceilings, Single-Leg Resilient Channel, RC1 Furring Channel *(09 22 13 23-0001)*

09 22 13 23-0005	SF	25 Gauge, 16" On Center, Installed On Ceilings, Single-Leg Resilient Channel, RC1 Furring Channel	6.09	2.69
		For Ceilings >10' High, Add	*0.81*	
		For 24" On Center, Deduct	*-0.68*	
		For 12" On Center, Add	*0.95*	
		For 20 Gauge, Add	*1.28*	

09 22 13 23-0006 Double-Leg Resilient Channel, RC2 Furring Channel *(09 22 13 23)*
Note: Includes clips where required.

09 22 13 23-0007 Installed On Walls, Double-Leg Resilient Channel, RC2 Furring Channel *(09 22 13 23-0006)*

09 22 13 23-0008	SF	25 Gauge, 16" On Center, Installed On Walls, Double-Leg Resilient Channel, RC2 Furring Channel	5.34	2.19
		For Walls >10' High, Add	*0.66*	
		For 24" On Center, Deduct	*-0.63*	
		For 12" On Center, Add	*0.85*	
		For 20 Gauge, Add	*1.30*	

09 22 13 23-0009 Installed On Ceilings, Double-Leg Resilient Channel, RC2 Furring Channel *(09 22 13 23-0006)*

09 22 13 23-0010	SF	25 Gauge, 16" On Center, Installed On Ceilings, Double-Leg Resilient Channel, RC2 Furring Channel	6.35	2.69
		For Ceilings >10' High, Add	*0.81*	
		For 24" On Center, Deduct	*-0.73*	
		For 12" On Center, Add	*1.00*	
		For 20 Gauge, Add	*1.45*	

09 22 16 Non-Structural Metal Framing *(09 22)*

Note: Includes studs, bridging, fasteners, and metal stiffener at half height. Do not deduct for openings of less than 25 SF.

09 22 16 13 Non-Structural Metal Stud Framing *(09 22 16)*

09 22 16 13-0001 25 Gauge, Non-Load Bearing, Non-Structural, Galvanized Steel Stud Framing With Tracks And Runners Assemblies *(09 22 16 13)*

09 22 16 13-0002	SF	1-5/8" Width, 16" On Center, 25 Gauge, Non-Load Bearing, Non-Structural, Galvanized Steel Stud Framing With Tracks And Runners Assembly	3.83	0.91
		For Powder-Actuated Fasteners Every 2', Add	*0.06*	
		For Walls >10' High, Add	*0.77*	
		For Soffit, Columns Or Beams Up To 10' High, Add	*2.20*	
		For Soffit, Columns Or Beams >10' High, Add	*2.88*	
		For Horizontal Installation Up To 10' High, Add	*0.72*	
		For Horizontal Installation >10' High, Add	*0.95*	
		For Curved Wall, Add	*0.68*	
		For 12" On Center, Add	*0.65*	
		For 24" On Center, Deduct	*-0.65*	
		For Up To 100, Add	*1.22*	
		For >100 To 300, Add	*0.61*	
		For >1,000, Deduct	*-0.35*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 22 16 13-0003	SF	2-1/2" Width, 16" On Center, 25 Gauge, Non-Load Bearing, Non-Structural, Galvanized Steel Stud Framing With Tracks And Runners Assembly	4.13	0.95
		For Powder-Actuated Fasteners Every 2', Add	*0.06*	
		For Walls >10' High, Add	*0.83*	
		For Soffit, Columns Or Beams Up To 10' High, Add	*2.32*	
		For Soffit, Columns Or Beams >10' High, Add	*3.03*	
		For Horizontal Installation Up To 10' High, Add	*0.77*	
		For Horizontal Installation >10' High, Add	*1.01*	
		For Curved Wall, Add	*0.71*	
		For 12" On Center, Add	*0.71*	
		For 24" On Center, Deduct	*-0.71*	
		For Up To 100, Add	*1.30*	
		For >100 To 300, Add	*0.65*	
		For >1,000, Deduct	*-0.38*	
09 22 16 13-0004	SF	3-5/8" Width, 16" On Center, 25 Gauge, Non-Load Bearing, Non-Structural, Galvanized Steel Stud Framing With Tracks And Runners Assembly	4.52	0.99
		For Powder-Actuated Fasteners Every 2', Add	*0.06*	
		For Walls >10' High, Add	*0.90*	
		For Soffit, Columns Or Beams Up To 10' High, Add	*2.45*	
		For Soffit, Columns Or Beams >10' High, Add	*3.20*	
		For Horizontal Installation Up To 10' High, Add	*0.83*	
		For Horizontal Installation >10' High, Add	*1.08*	
		For Curved Wall, Add	*0.75*	
		For 12" On Center, Add	*0.78*	
		For 24" On Center, Deduct	*-0.78*	
		For Up To 100, Add	*1.40*	
		For >100 To 300, Add	*0.70*	
		For >1,000, Deduct	*-0.43*	
09 22 16 13-0005	SF	4" Width, 16" On Center, 25 Gauge, Non-Load Bearing, Non-Structural, Galvanized Steel Stud Framing With Tracks And Runners Assembly	4.84	1.04
		For Powder-Actuated Fasteners Every 2', Add	*0.06*	
		For Walls >10' High, Add	*0.97*	
		For Soffit, Columns Or Beams Up To 10' High, Add	*2.58*	
		For Soffit, Columns Or Beams >10' High, Add	*3.37*	
		For Horizontal Installation Up To 10' High, Add	*0.88*	
		For Horizontal Installation >10' High, Add	*1.14*	
		For Curved Wall, Add	*0.79*	
		For 12" On Center, Add	*0.84*	
		For 24" On Center, Deduct	*-0.84*	
		For Up To 100, Add	*1.49*	
		For >100 To 300, Add	*0.75*	
		For >1,000, Deduct	*-0.46*	
09 22 16 13-0006	SF	6" Width, 16" On Center, 25 Gauge, Non-Load Bearing, Non-Structural, Galvanized Steel Stud Framing With Tracks And Runners Assembly	5.49	1.10
		For Powder-Actuated Fasteners Every 2', Add	*0.06*	
		For Walls >10' High, Add	*1.10*	
		For Soffit, Columns Or Beams Up To 10' High, Add	*2.76*	
		For Soffit, Columns Or Beams >10' High, Add	*3.59*	
		For Horizontal Installation Up To 10' High, Add	*0.96*	
		For Horizontal Installation >10' High, Add	*1.24*	
		For Curved Wall, Add	*0.83*	
		For 12" On Center, Add	*0.96*	
		For 24" On Center, Deduct	*-0.96*	
		For Up To 100, Add	*1.65*	
		For >100 To 300, Add	*0.83*	
		For >1,000, Deduct	*-0.55*	

09 22 16 13-0007 20 Gauge, Non-Load Bearing, Non-Structural, Galvanized Steel Stud Framing With Tracks And Runners Assemblies *(09 22 16 13)*

09 22 16 13-0008	SF	1-5/8" Width, 16" On Center, 20 Gauge, Non-Load Bearing, Non-Structural, Galvanized Steel Stud Framing With Tracks And Runners Assembly	4.42	0.92
		For Powder-Actuated Fasteners Every 2', Add	*0.06*	
		For Walls >10' High, Add	*0.88*	
		For Soffit, Columns Or Beams Up To 10' High, Add	*2.31*	
		For Soffit, Columns Or Beams >10' High, Add	*3.01*	
		For Horizontal Installation Up To 10' High, Add	*0.79*	
		For Horizontal Installation >10' High, Add	*1.02*	
		For Curved Wall, Add	*0.70*	
		For 12" On Center, Add	*0.77*	
		For 24" On Center, Deduct	*-0.77*	
		For Up To 100, Add	*1.35*	
		For >100 To 300, Add	*0.68*	
		For >1,000, Deduct	*-0.43*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 22 16 13-0009	SF	2-1/2" Width, 16" On Center, 20 Gauge, Non-Load Bearing, Non-Structural, Galvanized Steel Stud Framing With Tracks And Runners Assembly	4.91	0.98
		For Powder-Actuated Fasteners Every 2', Add	*0.06*	
		For Walls >10' High, Add	*0.98*	
		For Soffit, Columns Or Beams Up To 10' High, Add	*2.45*	
		For Soffit, Columns Or Beams >10' High, Add	*3.19*	
		For Horizontal Installation Up To 10' High, Add	*0.86*	
		For Horizontal Installation >10' High, Add	*1.10*	
		For Curved Wall, Add	*0.74*	
		For 12" On Center, Add	*0.86*	
		For 24" On Center, Deduct	*-0.86*	
		For Up To 100, Add	*1.47*	
		For >100 To 300, Add	*0.74*	
		For >1,000, Deduct	*-0.49*	
09 22 16 13-0010	SF	3-5/8" Width, 16" On Center, 20 Gauge, Non-Load Bearing, Non-Structural, Galvanized Steel Stud Framing With Tracks And Runners Assembly	5.48	1.02
		For Powder-Actuated Fasteners Every 2', Add	*0.06*	
		For Walls >10' High, Add	*1.10*	
		For Soffit, Columns Or Beams Up To 10' High, Add	*2.60*	
		For Soffit, Columns Or Beams >10' High, Add	*3.38*	
		For Horizontal Installation Up To 10' High, Add	*0.93*	
		For Horizontal Installation >10' High, Add	*1.19*	
		For Curved Wall, Add	*0.77*	
		For 12" On Center, Add	*0.97*	
		For 24" On Center, Deduct	*-0.97*	
		For Up To 100, Add	*1.61*	
		For >100 To 300, Add	*0.81*	
		For >1,000, Deduct	*-0.57*	
09 22 16 13-0011	SF	4" Width, 16" On Center, 20 Gauge, Non-Load Bearing, Non-Structural Structural, Galvanized Steel Framing With Tracks And Runners Assembly	5.86	1.07
		For Powder-Actuated Fasteners Every 2', Add	*0.06*	
		For Walls >10' High, Add	*1.17*	
		For Soffit, Columns Or Beams Up To 10' High, Add	*2.74*	
		For Soffit, Columns Or Beams >10' High, Add	*3.55*	
		For Horizontal Installation Up To 10' High, Add	*0.99*	
		For Horizontal Installation >10' High, Add	*1.26*	
		For Curved Wall, Add	*0.81*	
		For 12" On Center, Add	*1.04*	
		For 24" On Center, Deduct	*-1.04*	
		For Up To 100, Add	*1.71*	
		For >100 To 300, Add	*0.86*	
		For >1,000, Deduct	*-0.61*	
09 22 16 13-0012	SF	6" Width, 16" On Center, 20 Gauge, Non-Load Bearing, Non-Structural, Galvanized Steel Stud Framing With Tracks And Runners Assembly	8.51	1.12
		For Powder-Actuated Fasteners Every 2', Add	*0.06*	
		For Walls >10' High, Add	*1.70*	
		For Soffit, Columns Or Beams Up To 10' High, Add	*3.11*	
		For Soffit, Columns Or Beams >10' High, Add	*3.95*	
		For Horizontal Installation Up To 10' High, Add	*1.27*	
		For Horizontal Installation >10' High, Add	*1.56*	
		For Curved Wall, Add	*0.85*	
		For 12" On Center, Add	*1.56*	
		For 24" On Center, Deduct	*-1.56*	
		For Up To 100, Add	*2.27*	
		For >100 To 300, Add	*1.13*	
		For >1,000, Deduct	*-0.99*	

09 22 16 13-0013 18 Gauge, Non-Load Bearing, Non-Structural, Galvanized Steel Stud Framing With Tracks And Runners Assemblies *(09 22 16 13)*

09 22 16 13-0014	SF	2-1/2" Width, 16" On Center, 18 Gauge, Non-Load Bearing, Non-Structural, Galvanized Steel Stud Framing With Tracks And Runners Assembly	7.13	0.99
		For Powder-Actuated Fasteners Every 2', Add	*0.06*	
		For Walls >10' High, Add	*1.43*	
		For Soffit, Columns Or Beams Up To 10' High, Add	*2.71*	
		For Soffit, Columns Or Beams >10' High, Add	*3.46*	
		For Horizontal Installation Up To 10' High, Add	*1.09*	
		For Horizontal Installation >10' High, Add	*1.34*	
		For Curved Wall, Add	*0.75*	
		For 12" On Center, Add	*1.30*	
		For 24" On Center, Deduct	*-1.30*	
		For Up To 100, Add	*1.93*	
		For >100 To 300, Add	*0.96*	
		For >1,000, Deduct	*-0.82*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 22 16 13-0015	SF	3-5/8" Width, 16" On Center, 18 Gauge, Non-Load Bearing, Non-Structural, Galvanized Steel Stud Framing With Tracks And Runners Assembly	7.94	1.04
		For Powder-Actuated Fasteners Every 2', Add	*0.06*	
		For Walls >10' High, Add	*1.59*	
		For Soffit, Columns Or Beams Up To 10' High, Add	*2.90*	
		For Soffit, Columns Or Beams >10' High, Add	*3.69*	
		For Horizontal Installation Up To 10' High, Add	*1.19*	
		For Horizontal Installation >10' High, Add	*1.45*	
		For Curved Wall, Add	*0.79*	
		For 12" On Center, Add	*1.46*	
		For 24" On Center, Deduct	*-1.46*	
		For Up To 100, Add	*2.11*	
		For >100 To 300, Add	*1.06*	
		For >1,000, Deduct	*-0.93*	
09 22 16 13-0016	SF	4" Width, 16" On Center, 18 Gauge, Non-Load Bearing, Non-Structural, Galvanized Steel Stud Framing With Tracks And Runners Assembly	8.56	1.10
		For Powder-Actuated Fasteners Every 2', Add	*0.06*	
		For Walls >10' High, Add	*1.71*	
		For Soffit, Columns Or Beams Up To 10' High, Add	*3.06*	
		For Soffit, Columns Or Beams >10' High, Add	*3.89*	
		For Horizontal Installation Up To 10' High, Add	*1.27*	
		For Horizontal Installation >10' High, Add	*1.55*	
		For Curved Wall, Add	*0.83*	
		For 12" On Center, Add	*1.57*	
		For 24" On Center, Deduct	*-1.57*	
		For Up To 100, Add	*2.26*	
		For >100 To 300, Add	*1.13*	
		For >1,000, Deduct	*-1.01*	
09 22 16 13-0017	SF	6" Width, 16" On Center, 18 Gauge, Non-Load Bearing, Non-Structural, Galvanized Steel Stud Framing With Tracks And Runners Assembly	11.45	1.15
		For Powder-Actuated Fasteners Every 2', Add	*0.06*	
		For Walls >10' High, Add	*2.29*	
		For Soffit, Columns Or Beams Up To 10' High, Add	*3.47*	
		For Soffit, Columns Or Beams >10' High, Add	*4.34*	
		For Horizontal Installation Up To 10' High, Add	*1.58*	
		For Horizontal Installation >10' High, Add	*1.87*	
		For Curved Wall, Add	*0.87*	
		For 12" On Center, Add	*2.15*	
		For 24" On Center, Deduct	*-2.15*	
		For Up To 100, Add	*2.87*	
		For >100 To 300, Add	*1.44*	
		For >1,000, Deduct	*-1.43*	
09 22 16 13-0018	SF	8" Width, 16" On Center, 18 Gauge, Non-Load Bearing, Non-Structural, Galvanized Steel Stud Framing With Tracks And Runners Assembly	12.52	1.23
		For Powder-Actuated Fasteners Every 2', Add	*0.06*	
		For Walls >10' High, Add	*2.50*	
		For Soffit, Columns Or Beams Up To 10' High, Add	*3.68*	
		For Soffit, Columns Or Beams >10' High, Add	*4.60*	
		For Horizontal Installation Up To 10' High, Add	*1.71*	
		For Horizontal Installation >10' High, Add	*2.01*	
		For Curved Wall, Add	*0.91*	
		For 12" On Center, Add	*2.35*	
		For 24" On Center, Deduct	*-2.35*	
		For Up To 100, Add	*3.11*	
		For >100 To 300, Add	*1.56*	
		For >1,000, Deduct	*-1.57*	

09 22 16 13-0019 16 Gauge, Non-Load Bearing, Non-Structural, Galvanized Steel Stud Framing With Tracks And Runners Assemblies *(09 22 16 13)*

09 22 16 13-0020	SF	2-1/2" Width, 16" On Center, 16 Gauge, Non-Load Bearing, Non-Structural, Galvanized Steel Stud Framing With Tracks And Runners Assembly	7.62	1.02
		For Powder-Actuated Fasteners Every 2', Add	*0.06*	
		For Walls >10' High, Add	*1.52*	
		For Soffit, Columns Or Beams Up To 10' High, Add	*2.82*	
		For Soffit, Columns Or Beams >10' High, Add	*3.59*	
		For Horizontal Installation Up To 10' High, Add	*1.15*	
		For Horizontal Installation >10' High, Add	*1.40*	
		For Curved Wall, Add	*0.77*	
		For 12" On Center, Add	*1.40*	
		For 24" On Center, Deduct	*-1.40*	
		For Up To 100, Add	*2.04*	
		For >100 To 300, Add	*1.02*	
		For >1,000, Deduct	*-0.89*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 22 16 13-0021	SF	3-5/8" Width, 16" On Center, 16 Gauge, Non-Load Bearing, Non-Structural, Galvanized Steel Stud Framing With Tracks And Runners Assembly	9.09	1.07
		For Powder-Actuated Fasteners Every 2', Add	*0.06*	
		For Walls >10' High, Add	*1.82*	
		For Soffit, Columns Or Beams Up To 10' High, Add	*3.06*	
		For Soffit, Columns Or Beams >10' High, Add	*3.87*	
		For Horizontal Installation Up To 10' High, Add	*1.31*	
		For Horizontal Installation >10' High, Add	*1.58*	
		For Curved Wall, Add	*0.81*	
		For 12" On Center, Add	*1.68*	
		For 24" On Center, Deduct	*-1.68*	
		For Up To 100, Add	*2.36*	
		For >100 To 300, Add	*1.18*	
		For >1,000, Deduct	*-1.09*	
09 22 16 13-0022	SF	4" Width, 16" On Center, 16 Gauge, Non-Load Bearing, Non-Structural, Galvanized Steel Stud Framing With Tracks And Runners Assembly	9.63	1.12
		For Powder-Actuated Fasteners Every 2', Add	*0.06*	
		For Walls >10' High, Add	*1.93*	
		For Soffit, Columns Or Beams Up To 10' High, Add	*3.22*	
		For Soffit, Columns Or Beams >10' High, Add	*4.07*	
		For Horizontal Installation Up To 10' High, Add	*1.39*	
		For Horizontal Installation >10' High, Add	*1.67*	
		For Curved Wall, Add	*0.85*	
		For 12" On Center, Add	*1.79*	
		For 24" On Center, Deduct	*-1.79*	
		For Up To 100, Add	*2.49*	
		For >100 To 300, Add	*1.25*	
		For >1,000, Deduct	*-1.16*	
09 22 16 13-0023	SF	6" Width, 16" On Center, 16 Gauge, Non-Load Bearing, Non-Structural, Galvanized Steel Stud Framing With Tracks And Runners Assembly	12.42	1.19
		For Powder-Actuated Fasteners Every 2', Add	*0.06*	
		For Walls >10' High, Add	*2.48*	
		For Soffit, Columns Or Beams Up To 10' High, Add	*3.62*	
		For Soffit, Columns Or Beams >10' High, Add	*4.51*	
		For Horizontal Installation Up To 10' High, Add	*1.69*	
		For Horizontal Installation >10' High, Add	*1.98*	
		For Curved Wall, Add	*0.89*	
		For 12" On Center, Add	*2.34*	
		For 24" On Center, Deduct	*-2.34*	
		For Up To 100, Add	*3.08*	
		For >100 To 300, Add	*1.54*	
		For >1,000, Deduct	*-1.57*	
09 22 16 13-0024	SF	8" Width, 16" On Center, 16 Gauge, Non-Load Bearing, Non-Structural, Galvanized Steel Stud Framing With Tracks And Runners Assembly	13.75	1.26
		For Powder-Actuated Fasteners Every 2', Add	*0.06*	
		For Walls >10' High, Add	*2.75*	
		For Soffit, Columns Or Beams Up To 10' High, Add	*3.87*	
		For Soffit, Columns Or Beams >10' High, Add	*4.81*	
		For Horizontal Installation Up To 10' High, Add	*1.84*	
		For Horizontal Installation >10' High, Add	*2.16*	
		For Curved Wall, Add	*0.94*	
		For 12" On Center, Add	*2.59*	
		For 24" On Center, Deduct	*-2.59*	
		For Up To 100, Add	*3.37*	
		For >100 To 300, Add	*1.69*	
		For >1,000, Deduct	*-1.75*	

09 22 16 13-0025 Galvanized Steel Backing Plates *(09 22 16 13)*

Note: Used to attach fixtures, cabinets, shelves or handrails to metal stud walls.

09 22 16 13-0026	LF	3" Wide, 25 Gauge Galvanized Steel Backing Plate	1.75
09 22 16 13-0027	LF	4" Wide, 25 Gauge Galvanized Steel Backing Plate	2.13
09 22 16 13-0028	LF	6" Wide, 25 Gauge Galvanized Steel Backing Plate	2.71
09 22 16 13-0029	LF	8" Wide, 25 Gauge Galvanized Steel Backing Plate	3.31
09 22 16 13-0030	LF	10" Wide, 25 Gauge Galvanized Steel Backing Plate	3.89
09 22 16 13-0031	LF	12" Wide, 25 Gauge Galvanized Steel Backing Plate	4.62
09 22 16 13-0032	LF	3" Wide, 20 Gauge Galvanized Steel Backing Plate	2.22
09 22 16 13-0033	LF	4" Wide, 20 Gauge Galvanized Steel Backing Plate	2.74
09 22 16 13-0034	LF	6" Wide, 20 Gauge Galvanized Steel Backing Plate	3.62
09 22 16 13-0035	LF	8" Wide, 20 Gauge Galvanized Steel Backing Plate	4.50
09 22 16 13-0036	LF	10" Wide, 20 Gauge Galvanized Steel Backing Plate	5.41
09 22 16 13-0037	LF	12" Wide, 20 Gauge Galvanized Steel Backing Plate	6.42
09 22 16 13-0038	LF	3" Wide, 16 Gauge Galvanized Steel Backing Plate	3.00
09 22 16 13-0039	LF	4" Wide, 16 Gauge Galvanized Steel Backing Plate	3.71
09 22 16 13-0040	LF	6" Wide, 16 Gauge Galvanized Steel Backing Plate	5.00
09 22 16 13-0041	LF	8" Wide, 16 Gauge Galvanized Steel Backing Plate	6.30
09 22 16 13-0042	LF	10" Wide, 16 Gauge Galvanized Steel Backing Plate	7.70
09 22 16 13-0043	LF	12" Wide, 16 Gauge Galvanized Steel Backing Plate	9.06
09 22 16 13-0044	LF	3" Wide, 14 Gauge Galvanized Steel Backing Plate	3.51
09 22 16 13-0045	LF	4" Wide, 14 Gauge Galvanized Steel Backing Plate	4.39
09 22 16 13-0046	LF	6" Wide, 14 Gauge Galvanized Steel Backing Plate	6.02
09 22 16 13-0047	LF	8" Wide, 14 Gauge Galvanized Steel Backing Plate	7.66
09 22 16 13-0048	LF	10" Wide, 14 Gauge Galvanized Steel Backing Plate	9.41
09 22 16 13-0049	LF	12" Wide, 14 Gauge Galvanized Steel Backing Plate	11.10

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 22 36		**Lath** *(09 22)*		
09 22 36 13		**Gypsum Lath** *(09 22 36)*		
09 22 36 13-0001		Plaster Base Gypsum Panels *(09 22 36 13)*		
09 22 36 13-0002	SF	3/8" Thick, Installed On Studs Or Furred Walls, Plaster Base Gypsum Panel	1.79	0.60
		For Walls >10' High, Add	*0.15*	
		For Up To 100, Add	*0.61*	
		For >100 To 500, Add	*0.31*	
		For >5,000, Deduct	*-0.12*	
09 22 36 13-0003	SF	1/2" Thick, Installed On Studs Or Furred Walls, Plaster Base Gypsum Panel	2.45	0.70
		For Walls >10' High, Add	*0.18*	
		For Up To 100, Add	*0.70*	
		For >100 To 500, Add	*0.35*	
		For >5,000, Deduct	*-0.14*	
09 22 36 13-0004	SF	5/8" Thick, Installed On Studs Or Furred Walls, Plaster Base Gypsum Panel	3.12	0.80
		For Walls >10' High, Add	*0.20*	
		For Up To 100, Add	*0.80*	
		For >100 To 500, Add	*0.40*	
		For >5,000, Deduct	*-0.16*	
09 22 36 13-0005	SF	3/8" Thick, Installed On Ceiling, Plaster Base Gypsum Panel	2.27	0.84
		For Ceilings >10' High, Add	*0.26*	
		For Up To 100, Add	*0.85*	
		For >100 To 500, Add	*0.43*	
		For >5,000, Deduct	*-0.17*	
09 22 36 13-0006	SF	1/2" Thick, Installed On Ceiling, Plaster Base Gypsum Panel	3.01	0.97
		For Ceilings >10' High, Add	*0.29*	
		For Up To 100, Add	*0.98*	
		For >100 To 500, Add	*0.49*	
		For >5,000, Deduct	*-0.20*	
09 22 36 13-0007	SF	5/8" Thick, Installed On Ceiling, Plaster Base Gypsum Panel	3.76	1.12
		For Ceilings >10' High, Add	*0.34*	
		For Up To 100, Add	*1.12*	
		For >100 To 500, Add	*0.56*	
		For >5,000, Deduct	*-0.22*	
09 22 36 13-0008	SF	3/8" Thick, Installed On Columns And Beams, Plaster Base Gypsum Panel	2.75	1.08
		For Columns And Beams >10' High, Add	*0.33*	
		For Up To 100, Add	*1.09*	
		For >100 To 500, Add	*0.55*	
		For >5,000, Deduct	*-0.22*	
09 22 36 13-0009	SF	1/2" Thick, Installed On Columns And Beams, Plaster Base Gypsum Panel	3.57	1.26
		For Columns And Beams >10' High, Add	*0.38*	
		For Up To 100, Add	*1.26*	
		For >100 To 500, Add	*0.63*	
		For >5,000, Deduct	*-0.25*	
09 22 36 13-0010	SF	5/8" Thick, Installed On Columns And Beams, Plaster Base Gypsum Panel	4.40	1.46
		For Columns And Beams >10' High, Add	*0.43*	
		For Up To 100, Add	*1.44*	
		For >100 To 500, Add	*0.72*	
		For >5,000, Deduct	*-0.29*	
09 22 36 13-0011		Firestop Plaster Base Gypsum Panels *(09 22 36 13)*		
09 22 36 13-0012	SF	3/8" Thick, Installed On Studs Or Furred Walls, Firestop Plaster Base Gypsum Panel	2.48	0.60
		For Walls >10' High, Add	*0.15*	
		For Up To 100, Add	*0.61*	
		For >100 To 500, Add	*0.31*	
		For >5,000, Deduct	*-0.12*	
09 22 36 13-0013	SF	1/2" Thick, Installed On Studs Or Furred Walls, Firestop Plaster Base Gypsum Panel	2.88	0.70
		For Walls >10' High, Add	*0.18*	
		For Up To 100, Add	*0.70*	
		For >100 To 500, Add	*0.35*	
		For >5,000, Deduct	*-0.14*	
09 22 36 13-0014	SF	3/8" Thick, Installed On Ceilings, Firestop Plaster Base Gypsum Panel	2.96	0.84
		For Ceilings >10' High, Add	*0.26*	
		For Up To 100, Add	*0.85*	
		For >100 To 500, Add	*0.43*	
		For >5,000, Deduct	*-0.17*	
09 22 36 13-0015	SF	1/2" Thick, Installed On Ceilings, Firestop Plaster Base Gypsum Panel	3.44	0.97
		For Ceilings >10' High, Add	*0.29*	
		For Up To 100, Add	*0.98*	
		For >100 To 500, Add	*0.49*	
		For >5,000, Deduct	*-0.20*	
09 22 36 13-0016	SF	3/8" Thick, Installed On Columns And Beams, Firestop Plaster Base Gypsum Panel	3.44	1.08
		For Columns And Beams >10' High, Add	*0.33*	
		For Up To 100, Add	*1.09*	
		For >100 To 500, Add	*0.55*	
		For >5,000, Deduct	*-0.22*	
09 22 36 13-0017	SF	1/2" Thick, Installed On Columns And Beams, Firestop Plaster Base Gypsum Panel	4.00	1.26
		For Columns And Beams >10' High, Add	*0.38*	
		For Up To 100, Add	*1.26*	
		For >100 To 500, Add	*0.63*	
		For >5,000, Deduct	*-0.25*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 22 36 13-0018		Foil Back Plaster Base Gypsum Panels *(09 22 36 13)*		
09 22 36 13-0019	SF	3/8" Thick, Installed On Studs Or Furred Walls, Foil Back Plaster Base Gypsum Panel	2.48	0.60
		For Walls >10' High, Add	*0.15*	
		For Up To 100, Add	*0.61*	
		For >100 To 500, Add	*0.31*	
		For >5,000, Deduct	*-0.12*	
09 22 36 13-0020	SF	1/2" Thick, Installed On Studs Or Furred Walls, Foil Back Plaster Base Gypsum Panel	2.88	0.70
		For Walls >10' High, Add	*0.18*	
		For Up To 100, Add	*0.70*	
		For >100 To 500, Add	*0.35*	
		For >5,000, Deduct	*-0.14*	
09 22 36 13-0021	SF	3/8" Thick, Installed On Ceiling, Foil Back Plaster Base Gypsum Panel	2.96	0.84
		For Ceilings >10' High, Add	*0.26*	
		For Up To 100, Add	*0.85*	
		For >100 To 500, Add	*0.43*	
		For >5,000, Deduct	*-0.17*	
09 22 36 13-0022	SF	1/2" Thick, Installed On Ceiling, Foil Back Plaster Base Gypsum Panel	3.44	0.97
		For Ceilings >10' High, Add	*0.29*	
		For Up To 100, Add	*0.98*	
		For >100 To 500, Add	*0.49*	
		For >5,000, Deduct	*-0.20*	
09 22 36 13-0023	SF	3/8" Thick, Installed On Columns And Beams, Foil Back Plaster Base Gypsum Panel	3.44	1.08
		For Columns And Beams >10' High, Add	*0.33*	
		For Up To 100, Add	*1.09*	
		For >100 To 500, Add	*0.55*	
		For >5,000, Deduct	*-0.22*	
09 22 36 13-0024	SF	1/2" Thick, Installed On Columns And Beams, Foil Back Plaster Base Gypsum Panel	4.00	1.26
		For Columns And Beams >10' High, Add	*0.38*	
		For Up To 100, Add	*1.26*	
		For >100 To 500, Add	*0.63*	
		For >5,000, Deduct	*-0.25*	
09 22 36 23		**Metal Lath** *(09 22 36)*		
09 22 36 23-0001		Flat Diamond, Expanded Metal Lath *(09 22 36 23)*		
09 22 36 23-0002	SF	1.75 Lb./SY, Installed On Studs Or Furred Walls, Flat Diamond, Expanded Metal Lath	2.97	0.83
		For Walls >10' High, Add	*0.23*	
		For Paper Backed Lath, Add	*0.06*	
		For Up To 100, Add	*0.94*	
		For >100 To 500, Add	*0.47*	
		For >5,000, Deduct	*-0.19*	
09 22 36 23-0003	SF	2 Lb./SY, Installed On Studs Or Furred Walls, Flat Diamond, Expanded Metal Lath	3.10	0.83
		For Walls >10' High, Add	*0.23*	
		For Paper Backed Lath, Add	*0.06*	
		For Up To 100, Add	*0.94*	
		For >100 To 500, Add	*0.47*	
		For >5,000, Deduct	*-0.19*	
09 22 36 23-0004	SF	2.5 Lb./SY, Installed On Studs Or Furred Walls, Flat Diamond, Expanded Metal Lath	3.24	0.83
		For Walls >10' High, Add	*0.23*	
		For Paper Backed Lath, Add	*0.06*	
		For Up To 100, Add	*0.94*	
		For >100 To 500, Add	*0.47*	
		For >5,000, Deduct	*-0.19*	
09 22 36 23-0005	SF	3.4 Lb./SY, Installed On Studs Or Furred Walls, Flat Diamond, Expanded Metal Lath	3.71	0.89
		For Walls >10' High, Add	*0.25*	
		For Paper Backed Lath, Add	*0.06*	
		For Up To 100, Add	*1.00*	
		For >100 To 500, Add	*0.50*	
		For >5,000, Deduct	*-0.20*	
09 22 36 23-0006	SF	1.75 Lb./SY, Installed On Ceiling, Flat Diamond, Expanded Metal Lath	3.24	0.95
		For Ceilings >10' High, Add	*0.32*	
		For Paper Backed Lath, Add	*0.06*	
		For Up To 100, Add	*1.07*	
		For >100 To 500, Add	*0.54*	
		For >5,000, Deduct	*-0.21*	
09 22 36 23-0007	SF	2 Lb./SY, Installed On Ceiling, Flat Diamond, Expanded Metal Lath	3.37	0.95
		For Ceilings >10' High, Add	*0.32*	
		For Paper Backed Lath, Add	*0.06*	
		For Up To 100, Add	*1.07*	
		For >100 To 500, Add	*0.54*	
		For >5,000, Deduct	*-0.21*	
09 22 36 23-0008	SF	2.5 Lb./SY, Installed On Ceiling, Flat Diamond, Expanded Metal Lath	3.51	0.95
		For Ceilings >10' High, Add	*0.32*	
		For Paper Backed Lath, Add	*0.06*	
		For Up To 100, Add	*1.07*	
		For >100 To 500, Add	*0.54*	
		For >5,000, Deduct	*-0.21*	
09 22 36 23-0009	SF	3.4 Lb./SY, Installed On Ceiling, Flat Diamond, Expanded Metal Lath	3.86	0.95
		For Ceilings >10' High, Add	*0.32*	
		For Paper Backed Lath, Add	*0.06*	
		For Up To 100, Add	*1.07*	
		For >100 To 500, Add	*0.54*	
		For >5,000, Deduct	*-0.21*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 22 36 23-0010	SF	1.75 Lb./SY, Installed On Columns And Beams, Flat Diamond, Expanded Metal Lath	4.29	1.35
		For Columns And Beams >10' High, Add	*0.45*	
		For Paper Backed Lath, Add	*0.06*	
		For Up To 100, Add	*1.50*	
		For >100 To 500, Add	*0.75*	
		For >5,000, Deduct	*-0.30*	
09 22 36 23-0011	SF	2 Lb./SY, Installed On Columns And Beams, Flat Diamond, Expanded Metal Lath	4.43	1.35
		For Columns And Beams >10' High, Add	*0.45*	
		For Paper Backed Lath, Add	*0.06*	
		For Up To 100, Add	*1.50*	
		For >100 To 500, Add	*0.75*	
		For >5,000, Deduct	*-0.30*	
09 22 36 23-0012	SF	2.5 Lb./SY, Installed On Columns And Beams, Flat Diamond, Expanded Metal Lath	4.56	1.35
		For Columns And Beams >10' High, Add	*0.45*	
		For Paper Backed Lath, Add	*0.06*	
		For Up To 100, Add	*1.50*	
		For >100 To 500, Add	*0.75*	
		For >5,000, Deduct	*-0.30*	
09 22 36 23-0013	SF	3.4 Lb./SY, Installed On Columns And Beams, Flat Diamond, Expanded Metal Lath	5.66	1.69
		For Columns And Beams >10' High, Add	*0.56*	
		For Paper Backed Lath, Add	*0.06*	
		For Up To 100, Add	*1.87*	
		For >100 To 500, Add	*0.94*	
		For >5,000, Deduct	*-0.37*	
09 22 36 23-0014		Self-Furring, Flat Diamond, Expanded Metal Lath *(09 22 36 23)*		
09 22 36 23-0015	SF	1.75 Lb./SY, Installed On Solid Wall Surface, Self-Furring, Flat Diamond, Expanded Metal Lath	3.09	0.89
		For Walls >10' High, Add	*0.25*	
		For Paper Backed Lath, Add	*0.06*	
		For Up To 100, Add	*1.00*	
		For >100 To 500, Add	*0.50*	
		For >5,000, Deduct	*-0.20*	
09 22 36 23-0016	SF	2.0 Lb./SY, Installed On Solid Wall Surface, Self-Furring, Flat Diamond, Expanded Metal Lath	3.22	0.89
		For Walls >10' High, Add	*0.25*	
		For Paper Backed Lath, Add	*0.06*	
		For Up To 100, Add	*1.00*	
		For >100 To 500, Add	*0.50*	
		For >5,000, Deduct	*-0.20*	
09 22 36 23-0017	SF	2.5 Lb./SY, Installed On Solid Wall Surface, Self-Furring, Flat Diamond, Expanded Metal Lath	3.36	0.89
		For Walls >10' High, Add	*0.25*	
		For Paper Backed Lath, Add	*0.06*	
		For Up To 100, Add	*1.00*	
		For >100 To 500, Add	*0.50*	
		For >5,000, Deduct	*-0.20*	
09 22 36 23-0018	SF	3.4 Lb./SY, Installed On Solid Wall Surface, Self-Furring, Flat Diamond, Expanded Metal Lath	3.71	0.89
		For Walls >10' High, Add	*0.25*	
		For Paper Backed Lath, Add	*0.06*	
		For Up To 100, Add	*1.00*	
		For >100 To 500, Add	*0.50*	
		For >5,000, Deduct	*-0.20*	
09 22 36 23-0019	SF	1.75 Lb./SY, Installed On Columns And Beams, Self-Furring, Flat Diamond, Expanded Metal Lath	5.04	1.69
		For Columns And Beams >10' High, Add	*0.56*	
		For Paper Backed Lath, Add	*0.06*	
		For Up To 100, Add	*1.87*	
		For >100 To 500, Add	*0.94*	
		For >5,000, Deduct	*-0.37*	
09 22 36 23-0020	SF	2.0 Lb./SY, Installed On Columns And Beams, Self-Furring, Flat Diamond, Expanded Metal Lath	5.18	1.69
		For Columns And Beams >10' High, Add	*0.56*	
		For Paper Backed Lath, Add	*0.06*	
		For Up To 100, Add	*1.87*	
		For >100 To 500, Add	*0.94*	
		For >5,000, Deduct	*-0.37*	
09 22 36 23-0021	SF	2.5 Lb./SY, Installed On Columns And Beams, Self-Furring, Flat Diamond, Expanded Metal Lath	5.31	1.69
		For Columns And Beams >10' High, Add	*0.56*	
		For Paper Backed Lath, Add	*0.06*	
		For Up To 100, Add	*1.87*	
		For >100 To 500, Add	*0.94*	
		For >5,000, Deduct	*-0.37*	
09 22 36 23-0022	SF	3.4 Lb./SY, Installed On Columns And Beams, Self-Furring, Flat Diamond, Expanded Metal Lath	6.19	1.93
		For Columns And Beams >10' High, Add	*0.64*	
		For Paper Backed Lath, Add	*0.06*	
		For Up To 100, Add	*2.14*	
		For >100 To 500, Add	*1.07*	
		For >5,000, Deduct	*-0.43*	
09 22 36 23-0023		High Rib Metal Lath *(09 22 36 23)*		
09 22 36 23-0024	SF	2.75 Lb./SY, Installed On Ceiling, 1/8" High Rib Metal Lath	3.62	0.95
		For Ceilings >10' High, Add	*0.32*	
		For Up To 100, Add	*1.07*	
		For >100 To 500, Add	*0.54*	
		For >5,000, Deduct	*-0.21*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 22 36 23-0025	SF	3.4 Lb./SY, Installed On Ceiling, 1/8" High Rib Metal Lath	3.81	0.95
		For Ceilings >10' High, Add	*0.32*	
		For Up To 100, Add	*1.07*	
		For >100 To 500, Add	*0.54*	
		For >5,000, Deduct	*-0.21*	
09 22 36 23-0026	SF	3.4 Lb./SY, Installed On Ceiling, 3/8" High Rib Metal Lath	3.94	0.95
		For Ceilings >10' High, Add	*0.32*	
		For Up To 100, Add	*1.07*	
		For >100 To 500, Add	*0.54*	
		For >5,000, Deduct	*-0.21*	
09 22 36 23-0027	SF	4.0 Lb./SY, Installed On Ceiling, 3/8" High Rib Metal Lath	4.16	0.95
		For Ceilings >10' High, Add	*0.32*	
		For Up To 100, Add	*1.07*	
		For >100 To 500, Add	*0.54*	
		For >5,000, Deduct	*-0.21*	

09 22 36 33 Fiberglass Lath *(09 22 36)*

09 22 36 33-0001 Non-Metallic, Fiberglass Lath *(09 22 36 33)*

09 22 36 33-0002	SF	1/8" Thick, Installed On Ceiling, Non-Metallic, Fiberglass Lath	3.93	0.95
		For Ceilings >10' High, Add	*0.32*	
		For Up To 100, Add	*1.07*	
		For >100 To 500, Add	*0.54*	
		For >5,000, Deduct	*-0.21*	
09 22 36 33-0003	SF	1/4" Thick, Installed On Ceiling, Non-Metallic, Fiberglass Lath	4.19	0.95
		For Ceilings >10' High, Add	*0.32*	
		For Up To 100, Add	*1.07*	
		For >100 To 500, Add	*0.54*	
		For >5,000, Deduct	*-0.21*	
09 22 36 33-0004	SF	1/8" Thick, Installed On Solid Wall Surface, Non-Metallic, Fiberglass Lath	3.78	0.89
		For Walls >10' High, Add	*0.25*	
		For Up To 100, Add	*1.00*	
		For >100 To 500, Add	*0.50*	
		For >5,000, Deduct	*-0.20*	
09 22 36 33-0005	SF	1/4" Thick, Installed On Solid Wall Surface, Non-Metallic, Fiberglass Lath	4.04	0.89
		For Walls >10' High, Add	*0.25*	
		For Up To 100, Add	*1.00*	
		For >100 To 500, Add	*0.50*	
		For >5,000, Deduct	*-0.20*	

09 23 Gypsum Plastering *(09 20)*

09 23 13 Acoustical Gypsum Plastering *(09 23)*

Note: Excludes lath, furring and studs. See CSI section 09 22 00 00-0000 for metal studs and furring, 09 22 36 00-0000 for lath.

09 23 13 00-0001 Casing And Corner Beads *(09 23 13)*

09 23 13 00-0002	LF	Galvanized Expanded Flange Casing Bead For Plaster Applications	5.53	1.35
09 23 13 00-0003	LF	Zinc Expanded Flange Casing Bead For Plaster Applications	5.54	1.35
09 23 13 00-0004	LF	Vinyl Expanded Flange Casing Bead For Plaster Applications	5.86	1.35
09 23 13 00-0005	LF	Galvanized Corner Bead For Plaster Applications	5.32	1.35
09 23 13 00-0006	LF	Vinyl Corner Bead For Plaster Applications	5.35	1.35

09 23 13 00-0007 Trim *(09 23 13)*

09 23 13 00-0008	LF	Galvanized "J" Trim For Plaster Applications	6.04	1.35
		For Vinyl Instead Of Galvanized, Add	*0.38*	
		For Zinc Instead Of Galvanized, Add	*2.54*	
09 23 13 00-0009	LF	Galvanized "L" Trim For Plaster Applications	6.04	1.35
		For Vinyl Instead Of Galvanized, Add	*0.38*	
		For Zinc Instead Of Galvanized, Add	*2.54*	
09 23 13 00-0010	LF	Galvanized "U" Trim For Plaster Applications	6.04	1.35
		For Vinyl Instead Of Galvanized, Add	*0.38*	
		For Zinc Instead Of Galvanized, Add	*2.54*	

09 23 13 00-0011 Plaster Forms And Expansion Joints *(09 23 13)*

09 23 13 00-0012	SF	1" Architectural Foam Forms To Cover With Plaster	6.43	
09 23 13 00-0013	LF	3/4" Galvanized Expansion Joint For Plaster Applications	6.47	1.35

09 23 13 00-0014 One Skim Coat Gypsum Plaster On Walls *(09 23 13)*

09 23 13 00-0015	SF	Skim Coat One Coat Gypsum Plaster On Walls	1.52	
		For Walls >10' High, Add	*0.13*	
		For Horizontal Installation Up To 10' High, Add	*0.20*	
		For Horizontal Installation >10' High, Add	*0.40*	
		For Columns Or Beams Up To 10' High, Add	*0.41*	
		For Columns Or Beams >10' High, Add	*0.61*	
		For Up To 100, Add	*0.66*	
		For >100 To 500, Add	*0.33*	
		For >5,000, Deduct	*-0.26*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 23 13 00-0016	SF	For Each Additional Coat Over One, Skim Coat Gypsum Plaster On Walls	1.09	
		For Walls >10' High, Add	*0.09*	
		For Horizontal Installation Up To 10' High, Add	*0.14*	
		For Horizontal Installation >10' High, Add	*0.28*	
		For Columns Or Beams Up To 10' High, Add	*0.29*	
		For Columns Or Beams >10' High, Add	*0.43*	
		For Up To 100, Add	*0.47*	
		For >100 To 500, Add	*0.24*	
		For >5,000, Deduct	*-0.19*	
09 23 13 00-0017		Two Coats Gypsum Plaster On Walls *(09 23 13)*		
09 23 13 00-0018	SF	Smooth Finish Two Coats Gypsum Plaster On Walls	7.57	4.37
		For Walls >10' High, Add	*0.72*	
		For Horizontal Installation Up To 10' High, Add	*1.08*	
		For Horizontal Installation >10' High, Add	*2.16*	
		For Columns Or Beams Up To 10' High, Add	*2.23*	
		For Columns Or Beams >10' High, Add	*3.31*	
		For Up To 100, Add	*3.60*	
		For >100 To 500, Add	*1.80*	
		For >5,000, Deduct	*-1.44*	
09 23 13 00-0019	SF	Sand Aggregate Two Coats Gypsum Plaster On Walls	7.65	4.14
		For Walls >10' High, Add	*0.68*	
		For Horizontal Installation Up To 10' High, Add	*1.01*	
		For Horizontal Installation >10' High, Add	*2.03*	
		For Columns Or Beams Up To 10' High, Add	*2.10*	
		For Columns Or Beams >10' High, Add	*3.11*	
		For Up To 100, Add	*3.38*	
		For >100 To 500, Add	*1.69*	
		For >5,000, Deduct	*-1.35*	
09 23 13 00-0020	SF	Perlite Or Vermiculite Two Coats Gypsum Plaster On Walls	7.73	4.14
		For Walls >10' High, Add	*0.68*	
		For Horizontal Installation Up To 10' High, Add	*1.01*	
		For Horizontal Installation >10' High, Add	*2.03*	
		For Columns Or Beams Up To 10' High, Add	*2.10*	
		For Columns Or Beams >10' High, Add	*3.11*	
		For Up To 100, Add	*3.38*	
		For >100 To 500, Add	*1.69*	
		For >5,000, Deduct	*-1.35*	
09 23 13 00-0021		Three Coats Gypsum Plaster On Walls *(09 23 13)*		
09 23 13 00-0022	SF	Smooth Finish Three Coats Gypsum Plaster On Walls	9.14	5.32
		For Walls >10' High, Add	*0.86*	
		For Horizontal Installation Up To 10' High, Add	*1.29*	
		For Horizontal Installation >10' High, Add	*2.58*	
		For Columns Or Beams Up To 10' High, Add	*2.67*	
		For Columns Or Beams >10' High, Add	*3.96*	
		For Up To 100, Add	*4.31*	
		For >100 To 500, Add	*2.15*	
		For >5,000, Deduct	*-1.72*	
09 23 13 00-0023	SF	Sand Aggregate Three Coats Gypsum Plaster On Walls	9.04	4.85
		For Walls >10' High, Add	*0.80*	
		For Horizontal Installation Up To 10' High, Add	*1.20*	
		For Horizontal Installation >10' High, Add	*2.39*	
		For Columns Or Beams Up To 10' High, Add	*2.47*	
		For Columns Or Beams >10' High, Add	*3.67*	
		For Up To 100, Add	*3.99*	
		For >100 To 500, Add	*2.00*	
		For >5,000, Deduct	*-1.60*	
09 23 13 00-0024	SF	Perlite Or Vermiculite Three Coats Gypsum Plaster On Walls	8.59	4.85
		For Walls >10' High, Add	*0.79*	
		For Horizontal Installation Up To 10' High, Add	*1.19*	
		For Horizontal Installation >10' High, Add	*2.38*	
		For Columns Or Beams Up To 10' High, Add	*2.46*	
		For Columns Or Beams >10' High, Add	*3.65*	
		For Up To 100, Add	*3.97*	
		For >100 To 500, Add	*1.99*	
		For >5,000, Deduct	*-1.59*	
09 23 13 00-0025		Plaster Bonding Agent *(09 23 13)*		
09 23 13 00-0026	SF	1 Coat, Brush/Roller Applied Plaster Bonding Agent	0.87	
		For Walls >10' High, Add	*0.07*	
		For Columns Or Beams Up To 10' High, Add	*0.21*	
		For Columns Or Beams >10' High, Add	*0.31*	
		For Ceiling Application Up To 10' High, Add	*0.09*	
		For Ceiling Application >10' High, Add	*0.16*	

09 24 Cement Plastering *(09 20)*

09 24 13 Acoustical Cement Plastering *(09 24)*

09 24 13 00-0001 Keene's Cement Plaster, Quick Setting, White Hard Plaster *(09 24 13)*

Note: Used for areas with higher than normal moisture.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 24 13 00-0002	SF	1 Coat Keene's Cement Plaster On Walls	5.80	2.95
		For Walls >10' High, Add	*0.47*	
		For Horizontal Installation Up To 10' High, Add	*0.71*	
		For Horizontal Installation >10' High, Add	*1.42*	
		For Columns Or Beams Up To 10' High, Add	*1.46*	
		For Columns Or Beams >10' High, Add	*2.17*	
		For Up To 100, Add	*2.36*	
		For >100 To 500, Add	*1.18*	
		For >5,000, Deduct	*-0.94*	
09 24 13 00-0003	SF	2 Coat Keene's Cement Plaster On Walls	8.85	4.61
		For Walls >10' High, Add	*0.75*	
		For Horizontal Installation Up To 10' High, Add	*1.12*	
		For Horizontal Installation >10' High, Add	*2.25*	
		For Columns Or Beams Up To 10' High, Add	*2.32*	
		For Columns Or Beams >10' High, Add	*3.45*	
		For Up To 100, Add	*3.75*	
		For >100 To 500, Add	*1.87*	
		For >5,000, Deduct	*-1.50*	
09 24 13 00-0004	SF	3 Coat Keene's Cement Plaster On Walls	10.01	5.20
		For Walls >10' High, Add	*0.85*	
		For Horizontal Installation Up To 10' High, Add	*1.27*	
		For Horizontal Installation >10' High, Add	*2.54*	
		For Columns Or Beams Up To 10' High, Add	*2.63*	
		For Columns Or Beams >10' High, Add	*3.90*	
		For Up To 100, Add	*4.24*	
		For >100 To 500, Add	*2.12*	
		For >5,000, Deduct	*-1.69*	

09 24 23 Cement Stucco *(09 24)*

Note: Packaged product reinforced with fibers. All plastering excludes lath, furring or studs except as noted. See CSI section 09 22 00 00-0000 for metal studs and furring.

09 24 23 00-0001 Stucco *(09 24 23)*

Note: Excludes wall scaffolding or lifting equipment. See CSI section 09 22 36 00-0000 for lath.

09 24 23 00-0002	SF	Scratch/Brown/Finish, Three Coat Troweled Stucco Note: Excludes lath and felt. Interior or exterior, one side.	11.26	3.66
		For Walls >10' High, Add	*1.00*	
		For Horizontal Installation Up To 10' High, Add	*1.50*	
		For Horizontal Installation >10' High, Add	*3.00*	
		For Columns Or Beams Up To 10' High, Add	*3.10*	
		For Columns Or Beams >10' High, Add	*4.60*	
		For Color Added To Finish Coat, Add	*0.15*	
		For Smooth Float Finish, Add	*2.10*	
		For Up To 100, Add	*5.01*	
		For >100 To 500, Add	*2.50*	
		For >5,000, Deduct	*-2.00*	
09 24 23 00-0003	SF	Scratch/Brown, Two Coat Troweled Stucco Note: Excludes lath and felt. Interior or exterior, one side.	4.76	1.77
		For Walls >10' High, Add	*0.37*	
		For Horizontal Installation Up To 10' High, Add	*0.55*	
		For Horizontal Installation >10' High, Add	*1.10*	
		For Columns Or Beams Up To 10' High, Add	*1.13*	
		For Columns Or Beams >10' High, Add	*1.68*	
		For Up To 100, Add	*1.83*	
		For >100 To 500, Add	*0.92*	
		For >5,000, Deduct	*-0.73*	
09 24 23 00-0004	SF	Scratch/Finish, Two Coat Troweled Stucco Note: Excludes lath and felt. Interior or exterior, one side.	7.42	1.77
		For Walls >10' High, Add	*0.65*	
		For Horizontal Installation Up To 10' High, Add	*0.98*	
		For Horizontal Installation >10' High, Add	*1.95*	
		For Columns Or Beams Up To 10' High, Add	*2.02*	
		For Columns Or Beams >10' High, Add	*2.99*	
		For Color Added To Finish Coat, Add	*0.15*	
		For Smooth Float Finish, Add	*1.79*	
		For Up To 100, Add	*3.25*	
		For >100 To 500, Add	*1.63*	
		For >5,000, Deduct	*-1.30*	
09 24 23 00-0005	SF	Finish Coat Troweled Stucco Note: Excludes lath and felt. Interior or exterior, one side.	4.87	1.18
		For Walls >10' High, Add	*0.47*	
		For Horizontal Installation Up To 10' High, Add	*0.71*	
		For Horizontal Installation >10' High, Add	*1.42*	
		For Columns Or Beams Up To 10' High, Add	*1.46*	
		For Columns Or Beams >10' High, Add	*2.17*	
		For Color Added To Finish Coat, Add	*0.15*	
		For Smooth Float Finish, Add	*1.78*	
		For Up To 100, Add	*2.36*	
		For >100 To 500, Add	*1.18*	
		For >5,000, Deduct	*-0.94*	

09 24 33 Cement Parging *(09 24)*

09 24 33 00-0001 Cement Parging *(09 24 33)*

09 24 33 00-0002	SF	1/8" Thick Sand And Cement Parging	4.39	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 24 33 00-0003	SF	1/4" Thick Sand And Cement Parging	5.60	
09 24 33 00-0004	SF	1/2" Thick Sand And Cement Parging	8.55	

09 28 Backing Boards and Underlayments *(09 20)*

09 28 13 Cementitious Backing Boards *(09 28)*

09 28 13 00-0001 Cementitious Backer Units *(09 28 13)*

Note: Installed with mechanical fasteners to floor, wall and ceiling surfaces. Use thin-set from setting methods section for floor installations as applicable.

09 28 13 00-0002	SF	1/4" Cementitious Backer Units For Installation On Floors	4.69	0.90
		For Up To 50, Add	*3.85*	
		For >50 To 250, Add	*0.71*	
		For >1,000, Deduct	*-0.36*	
		For Installation On Wall, Add	*0.71*	
		For Installation On Ceiling, Add	*1.79*	
09 28 13 00-0003	SF	1/2" Cementitious Backer Units For Installation On Floors	5.44	1.08
		For Up To 50, Add	*4.57*	
		For >50 To 250, Add	*0.86*	
		For >1,000, Deduct	*-0.43*	
		For Installation On Wall, Add	*0.86*	
		For Installation On Ceiling, Add	*2.14*	
09 28 13 00-0004	SF	5/8" Cementitious Backer Units For Installation On Floors	6.62	1.25
		For Up To 50, Add	*5.41*	
		For >50 To 250, Add	*1.00*	
		For >1,000, Deduct	*-0.50*	
		For Installation On Wall, Add	*1.00*	
		For Installation On Ceiling, Add	*2.50*	

09 28 16 Glass-Mat Faced Gypsum Backing Boards *(09 28)*

09 28 16 00-0001 Glass Mat Faced Backer Units (DensShield) *(09 28 16)*

Note: Installed with mechanical fasteners to floor, wall and ceiling surfaces. Use thin-set from setting methods section for floor installations as applicable.

09 28 16 00-0002	SF	1/2" Glass-Mat Faced Gypsum Backing Boards For Installation On Floors (DensShield Tile Backer)	4.08	1.00
		For Up To 50, Add	*2.95*	
		For >50 To 250, Add	*0.51*	
		For >1,000, Deduct	*-0.26*	
		For Installation On Wall, Add	*0.51*	
		For Installation On Ceiling, Add	*1.29*	
09 28 16 00-0003	SF	5/8" Glass-Mat Faced Gypsum Backing Boards For Installation On Floors (DensShield Tile Backer)	4.97	1.15
		For Up To 50, Add	*3.39*	
		For >50 To 250, Add	*0.57*	
		For >1,000, Deduct	*-0.29*	
		For Installation On Wall, Add	*0.57*	
		For Installation On Ceiling, Add	*1.43*	

09 29 Gypsum Board *(09 20)*

Note: Do not deduct for opens of less than 25 SF when calculating total wall square footage.

09 29 10 Gypsum Board *(09 29)*

09 29 10 00-0001 Standard Gypsum Board Application *(09 29 10)*

Note: Includes gypsum board screwed in place on walls, ceilings, beams, columns, soffits, etc. Excludes finishing. See CSI section 09 01 20 91-0001 for small repairs, 09 29 10 00-0036 for finishing gypsum board, 09 29 10 00-0049 for casing and corner bead.

09 29 10 00-0002 Standard Gypsum Board Application *(09 29 10 00-0001)*

09 29 10 00-0003	SF	1/4" Gypsum Board	1.67	0.57
		For Curved Surfaces With A 2'-0" Maximum Radius, Add	*0.27*	
		For Adhesive Applied Sheets, Add	*0.12*	
		Note: Includes bracing until adhesive is bonded		
		For Horizontal Installation Up To 10' High, Add	*0.39*	
		For Horizontal Installation >10' High, Add	*0.58*	
		For Walls >10' High, Add	*0.09*	
		For Up To 128, Add	*0.56*	
		For >128 To 320, Add	*0.34*	
		For >1,536, Deduct	*-0.14*	
09 29 10 00-0004	SF	3/8" Gypsum Board	1.82	0.64
		For Curved Surfaces With A 2'-0" Maximum Radius, Add	*0.30*	
		For Adhesive Applied Sheets, Add	*0.12*	
		Note: Includes bracing until adhesive is bonded		
		For Foil Back Board, Add	*0.10*	
		For Horizontal Installation Up To 10' High, Add	*0.44*	
		For Horizontal Installation >10' High, Add	*0.65*	
		For Walls >10' High, Add	*0.10*	
		For Up To 128, Add	*0.62*	
		For >128 To 320, Add	*0.38*	
		For >1,536, Deduct	*-0.14*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 29 10 00-0005	SF	1/2" Gypsum Board	2.00	0.74
		For Curved Surfaces With A 2'-0" Maximum Radius, Add	*0.35*	
		For Adhesive Applied Sheets, Add	*0.13*	
		Note: Includes bracing until adhesive is bonded		
		For Foil Back Board, Add	*0.10*	
		For Horizontal Installation Up To 10' High, Add	*0.50*	
		For Horizontal Installation >10' High, Add	*0.74*	
		For Walls >10' High, Add	*0.12*	
		For Up To 128, Add	*0.70*	
		For >128 To 320, Add	*0.42*	
		For >1,536, Deduct	*-0.15*	
09 29 10 00-0006	SF	5/8" Gypsum Board	2.35	0.85
		For Curved Surfaces With A 2'-0" Maximum Radius, Add	*0.40*	
		For Adhesive Applied Sheets, Add	*0.15*	
		Note: Includes bracing until adhesive is bonded		
		For Foil Back Board, Add	*0.10*	
		For Horizontal Installation Up To 10' High, Add	*0.58*	
		For Horizontal Installation >10' High, Add	*0.85*	
		For Walls >10' High, Add	*0.14*	
		For Up To 128, Add	*0.81*	
		For >128 To 320, Add	*0.49*	
		For >1,536, Deduct	*-0.18*	

09 29 10 00-0007 Fire Rated Gypsum Board Application *(09 29 10 00-0001)*

09 29 10 00-0008 Type X, Fire Rated Gypsum Board *(09 29 10 00-0007)*

09 29 10 00-0009	SF	5/8" Type X Fire Rated Gypsum Board	2.51	0.85
		For Curved Surfaces With A 2'-0" Maximum Radius, Add	*0.44*	
		For Adhesive Applied Sheets, Add	*0.15*	
		Note: Includes bracing until adhesive is bonded		
		For Foil Back Board, Add	*0.10*	
		For Horizontal Installation Up To 10' High, Add	*0.64*	
		For Horizontal Installation >10' High, Add	*0.94*	
		For Walls >10' High, Add	*0.15*	
		For Up To 128, Add	*0.88*	
		For >128 To 320, Add	*0.53*	
		For >1,536, Deduct	*-0.19*	

09 29 10 00-0010 Type C, Fire Rated Gypsum Board *(09 29 10 00-0007)*

09 29 10 00-0011	SF	1/2" Type C Fire Rated Gypsum Board	2.30	0.74
		For Curved Surfaces With A 2'-0" Maximum Radius, Add	*0.38*	
		For Adhesive Applied Sheets, Add	*0.14*	
		Note: Includes bracing until adhesive is bonded		
		For Foil Back Board, Add	*0.10*	
		For Horizontal Installation Up To 10' High, Add	*0.55*	
		For Horizontal Installation >10' High, Add	*0.82*	
		For Walls >10' High, Add	*0.13*	
		For Up To 128, Add	*0.79*	
		For >128 To 320, Add	*0.47*	
		For >1,536, Deduct	*-0.18*	
09 29 10 00-0012	SF	5/8" Type C Fire Rated Gypsum Board	2.58	0.85
		For Curved Surfaces With A 2'-0" Maximum Radius, Add	*0.44*	
		For Adhesive Applied Sheets, Add	*0.15*	
		Note: Includes bracing until adhesive is bonded		
		For Foil Back Board, Add	*0.10*	
		For Horizontal Installation Up To 10' High, Add	*0.64*	
		For Horizontal Installation >10' High, Add	*0.94*	
		For Walls >10' High, Add	*0.15*	
		For Up To 128, Add	*0.89*	
		For >128 To 320, Add	*0.54*	
		For >1,536, Deduct	*-0.20*	

09 29 10 00-0013 Fire Rated Gypsum Board (Sheetrock® Ultracode®) *(09 29 10 00-0007)*

09 29 10 00-0014	SF	3/4" Fire Rated Gypsum Board (Sheetrock® Ultracode®)	3.49	0.85
		For Curved Surfaces With A 2'-0" Maximum Radius, Add	*0.45*	
		For Adhesive Applied Sheets, Add	*0.15*	
		Note: Includes bracing until adhesive is bonded		
		For Horizontal Installation Up To 10' High, Add	*0.64*	
		For Horizontal Installation >10' High, Add	*0.94*	
		For Walls >10' High, Add	*0.15*	
		For Up To 128, Add	*1.07*	
		For >128 To 320, Add	*0.63*	
		For >1,536, Deduct	*-0.34*	

09 29 10 00-0015 Moisture Resistant Gypsum Board Application *(09 29 10 00-0001)*

Note: Water-resistant gypsum core.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 29 10 00-0016	SF	1/2" Moisture Resistant Gypsum Board	2.17	0.74
		For Curved Surfaces With A 2'-0" Maximum Radius, Add	*0.35*	
		For Adhesive Applied Sheets, Add	*0.13*	
		Note: Includes bracing until adhesive is bonded		
		For Horizontal Installation Up To 10' High, Add	*0.50*	
		For Horizontal Installation >10' High, Add	*0.74*	
		For Walls >10' High, Add	*0.12*	
		For Up To 128, Add	*0.73*	
		For >128 To 320, Add	*0.44*	
		For >1,536, Deduct	*-0.18*	
09 29 10 00-0017	SF	5/8" Moisture Resistant Gypsum Board	2.80	0.74
		For Curved Surfaces With A 2'-0" Maximum Radius, Add	*0.40*	
		For Adhesive Applied Sheets, Add	*0.15*	
		Note: Includes bracing until adhesive is bonded		
		For Horizontal Installation Up To 10' High, Add	*0.58*	
		For Horizontal Installation >10' High, Add	*0.85*	
		For Walls >10' High, Add	*0.14*	
		For Up To 128, Add	*0.90*	
		For >128 To 320, Add	*0.54*	
		For >1,536, Deduct	*-0.25*	
09 29 10 00-0018		Vinyl Faced Gypsum Board Application *(09 29 10 00-0001)*		
		Note: Includes clips and adhesive.		
09 29 10 00-0019	SF	3/8" Prefinished, Vinyl Faced Gypsum Board	4.31	0.57
		For Curved Surfaces With A 2'-0" Maximum Radius, Add	*0.33*	
		For Adhesive Applied Sheets, Add	*0.12*	
		Note: Includes bracing until adhesive is bonded		
		For Horizontal Installation Up To 10' High, Add	*0.44*	
		For Horizontal Installation >10' High, Add	*0.65*	
		For Walls >10' High, Add	*0.10*	
		For Up To 128, Add	*1.12*	
		For >128 To 320, Add	*0.62*	
		For >1,536, Deduct	*-0.52*	
09 29 10 00-0020	SF	1/2" Prefinished, Vinyl Faced Gypsum Board	4.50	0.74
		For Curved Surfaces With A 2'-0" Maximum Radius, Add	*0.37*	
		For Adhesive Applied Sheets, Add	*0.13*	
		Note: Includes bracing until adhesive is bonded		
		For Horizontal Installation Up To 10' High, Add	*0.50*	
		For Horizontal Installation >10' High, Add	*0.74*	
		For Walls >10' High, Add	*0.12*	
		For Up To 128, Add	*1.20*	
		For >128 To 320, Add	*0.67*	
		For >1,536, Deduct	*-0.53*	
09 29 10 00-0021	SF	5/8" Prefinished, Vinyl Faced Gypsum Board	4.72	0.85
		For Curved Surfaces With A 2'-0" Maximum Radius, Add	*0.42*	
		For Adhesive Applied Sheets, Add	*0.15*	
		Note: Includes bracing until adhesive is bonded		
		For Horizontal Installation Up To 10' High, Add	*0.58*	
		For Horizontal Installation >10' High, Add	*0.85*	
		For Walls >10' High, Add	*0.14*	
		For Up To 128, Add	*1.28*	
		For >128 To 320, Add	*0.73*	
		For >1,536, Deduct	*-0.54*	
09 29 10 00-0022	SF	1/2" Fire Rated, Prefinished Vinyl Faced Gypsum Board	5.15	0.74
		For Curved Surfaces With A 2'-0" Maximum Radius, Add	*0.41*	
		For Adhesive Applied Sheets, Add	*0.14*	
		Note: Includes bracing until adhesive is bonded		
		For Horizontal Installation Up To 10' High, Add	*0.55*	
		For Horizontal Installation >10' High, Add	*0.82*	
		For Walls >10' High, Add	*0.13*	
		For Up To 128, Add	*1.36*	
		For >128 To 320, Add	*0.76*	
		For >1,536, Deduct	*-0.61*	
09 29 10 00-0023	SF	5/8" Fire Rated, Prefinished Vinyl Faced Gypsum Board	7.65	0.85
		For Curved Surfaces With A 2'-0" Maximum Radius, Add	*0.49*	
		For Adhesive Applied Sheets, Add	*0.15*	
		Note: Includes bracing until adhesive is bonded		
		For Horizontal Installation Up To 10' High, Add	*0.64*	
		For Horizontal Installation >10' High, Add	*0.94*	
		For Walls >10' High, Add	*0.15*	
		For Up To 128, Add	*1.90*	
		For >128 To 320, Add	*1.05*	
		For >1,536, Deduct	*-0.96*	
09 29 10 00-0024		Moisture And Mold Resistant Gypsum Board Application *(09 29 10 00-0001)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 29 10 00-0025	SF	1/2", Mesh Reinforced, Moisture And Mold Resistant Gypsum Board (Georgia-Pacific ToughRock® Mold-Guard™)	2.52	0.71
		For Curved Surfaces With A 2'-0" Maximum Radius, Add	*0.35*	
		For Adhesive Applied Sheets, Add	*0.13*	
		Note: Includes bracing until adhesive is bonded		
		For Non-reinforced Board, Deduct	*-0.08*	
		For Horizontal Installation Up To 10' High, Add	*0.50*	
		For Horizontal Installation >10' High, Add	*0.74*	
		For Walls >10' High, Add	*0.12*	
		For Up To 128, Add	*0.80*	
		For >128 To 320, Add	*0.47*	
		For >1,536, Deduct	*-0.23*	
09 29 10 00-0026	SF	5/8", Mesh Reinforced, Moisture And Mold Resistant Gypsum Board (Georgia-Pacific ToughRock® Mold-Guard™)	2.98	0.81
		For Curved Surfaces With A 2'-0" Maximum Radius, Add	*0.40*	
		For Adhesive Applied Sheets, Add	*0.15*	
		Note: Includes bracing until adhesive is bonded		
		For Non-reinforced Board, Deduct	*-0.08*	
		For Horizontal Installation Up To 10' High, Add	*0.58*	
		For Horizontal Installation >10' High, Add	*0.85*	
		For Walls >10' High, Add	*0.14*	
		For Up To 128, Add	*0.94*	
		For >128 To 320, Add	*0.55*	
		For >1,536, Deduct	*-0.28*	
09 29 10 00-0027	SF	1/2" Fire Rated, Mesh Reinforced, Moisture And Mold Resistant Gypsum Board (Georgia-Pacific ToughRock® Fireguard X® Mold-Guard™)	2.98	0.71
		For Curved Surfaces With A 2'-0" Maximum Radius, Add	*0.39*	
		For Adhesive Applied Sheets, Add	*0.14*	
		Note: Includes bracing until adhesive is bonded		
		For Horizontal Installation Up To 10' High, Add	*0.55*	
		For Horizontal Installation >10' High, Add	*0.82*	
		For Walls >10' High, Add	*0.13*	
		For Up To 128, Add	*0.92*	
		For >128 To 320, Add	*0.54*	
		For >1,536, Deduct	*-0.28*	
09 29 10 00-0028	SF	5/8" Fire Rated, Mesh Reinforced, Moisture And Mold Resistant Gypsum Board (Georgia-Pacific ToughRock® Fireguard X® Mold-Guard™)	3.34	0.81
		For Curved Surfaces With A 2'-0" Maximum Radius, Add	*0.44*	
		For Adhesive Applied Sheets, Add	*0.15*	
		Note: Includes bracing until adhesive is bonded		
		For Horizontal Installation Up To 10' High, Add	*0.64*	
		For Horizontal Installation >10' High, Add	*0.94*	
		For Walls >10' High, Add	*0.15*	
		For Up To 128, Add	*1.04*	
		For >128 To 320, Add	*0.61*	
		For >1,536, Deduct	*-0.31*	
09 29 10 00-0029		Impact Resistant Gypsum Board *(09 29 10 00-0001)*		
		Note: Includes tapered edge, mold and moisture resistant, fire-resistant, Type X gypsum core encased in a heavy, abrasion and mold/mildew/moisture resistant		
09 29 10 00-0030	SF	5/8" Fire Rated, Impact Resistant Gypsum Board (National Gypsum Hi-Impact®)	4.51	0.81
		For Curved Surfaces With A 2'-0" Maximum Radius, Add	*0.42*	
		For Adhesive Applied Sheets, Add	*0.14*	
		Note: Includes bracing until adhesive is bonded		
		For Horizontal Installation Up To 10' High, Add	*0.57*	
		For Horizontal Installation >10' High, Add	*0.85*	
		For Walls >10' High, Add	*0.14*	
		For Up To 128, Add	*1.24*	
		For >128 To 320, Add	*0.70*	
		For >1,536, Deduct	*-0.51*	
09 29 10 00-0031		Abuse Resistant Gypsum Board *(09 29 10 00-0001)*		
		Note: Includes tapered edge, mold and moisture resistant, fire-resistant Type X gypsum core encased in a heavy, abrasion and mold/mildew/moisture resistant		
09 29 10 00-0032	SF	5/8" Fire Rated, Abuse Resistant Gypsum Board (National Gypsum Hi-Abuse®)	3.06	0.81
		For Curved Surfaces With A 2'-0" Maximum Radius, Add	*0.40*	
		For Adhesive Applied Sheets, Add	*0.14*	
		Note: Includes bracing until adhesive is bonded		
		For Horizontal Installation Up To 10' High, Add	*0.57*	
		For Horizontal Installation >10' High, Add	*0.85*	
		For Walls >10' High, Add	*0.14*	
		For Up To 128, Add	*0.95*	
		For >128 To 320, Add	*0.56*	
		For >1,536, Deduct	*-0.29*	
09 29 10 00-0033		Noise Reducing Gypsum Board *(09 29 10 00-0001)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 29 10 00-0034	SF	1/2" Noise Reducing Gypsum Board (National Gypsum SoundBreak)	5.51	0.85
		For Curved Surfaces With A 2'-0" Maximum Radius, Add	*0.43*	
		For Adhesive Applied Sheets, Add	*0.15*	
		Note: Includes bracing until adhesive is bonded		
		For Horizontal Installation Up To 10' High, Add	*0.58*	
		For Horizontal Installation >10' High, Add	*0.86*	
		For Walls >10' High, Add	*0.14*	
		For Up To 128, Add	*1.44*	
		For >128 To 320, Add	*0.81*	
		For >1,536, Deduct	*-0.66*	
09 29 10 00-0035	SF	5/8" Noise Reducing Gypsum Board (National Gypsum SoundBreak)	6.62	0.85
		For Curved Surfaces With A 2'-0" Maximum Radius, Add	*0.44*	
		For Adhesive Applied Sheets, Add	*0.15*	
		Note: Includes bracing until adhesive is bonded		
		For Horizontal Installation Up To 10' High, Add	*0.58*	
		For Horizontal Installation >10' High, Add	*0.86*	
		For Walls >10' High, Add	*0.14*	
		For Up To 128, Add	*1.67*	
		For >128 To 320, Add	*0.92*	
		For >1,536, Deduct	*-0.82*	

09 29 10 00-0036 Finishing Gypsum Board Applications *(09 29 10)*

Note: Includes flat or curved walls, columns, soffits, recesses, and chases. Tape, spackle, sand and finish gypsum board to the appropriate level as defined by ASTM C 840. No taping or finishing is required for Level 0. For Level 1, tape is set in compound at joints and interior angles. Ridges and tool marks are acceptable. For Level 2, tape is set in compound and wiped with a joint knife leaving a thin coating of compound over joints, interior angles, fastener heads, and beads. Ridges and tool marks are acceptable. Compound applied over the body of the tape at the time of the tape is set satisfies the conditions for this level. For Level 3, tape is set in compound and one additional coat of compound is applied over all joints and interior angles. Fastener heads and accessories receive two separate coats of joint compound. Ridges and tool marks are not acceptable. For Level 4, tape is set in compound and two separate coats of compound are applied over all flat joints with one separate coat of compound applied over interior angles. Fastener heads and accessories receive three separate coats of compound. Ridges and tool marks are not acceptable. A Level 5 finish is a Level 4 finish plus a thin skim coat of compound applied to the entire drywall surface. All levels of finish require that the surface be free of excess compound. A single modifier may be used to change the level of finish to the appropriate level.

09 29 10 00-0037 Finish Gypsum Board Walls, ASTM C840 Level 4 *(09 29 10 00-0036)*

09 29 10 00-0038	SF	Up To 10' High, Walls, Tape, Spackle And Finish Gypsum Board	0.95	
		For Up To 128, Add	*0.36*	
		For >128 To 320, Add	*0.23*	
		For >5,400, Deduct	*-0.10*	
		For ASTM C840 Level 1 Finish, Deduct	*-0.45*	
		For ASTM C840 Level 2 Finish, Deduct	*-0.23*	
		For ASTM C840 Level 3 Finish, Deduct	*-0.09*	
		For ASTM C840 Level 5 High Quality Finish, Add	*0.70*	
		For Spray Applied Textured Or Orange Peel Finish, Add	*0.70*	
09 29 10 00-0039	SF	>10' High, Walls, Tape, Spackle And Finish Gypsum Board	1.26	
		Note: Use this task for the entire wall area when the wall is >10' high.		
		For Up To 128, Add	*0.49*	
		For >128 To 320, Add	*0.30*	
		For >5,400, Deduct	*-0.13*	
		For ASTM C840 Level 1 Finish, Deduct	*-0.61*	
		For ASTM C840 Level 2 Finish, Deduct	*-0.30*	
		For ASTM C840 Level 3 Finish, Deduct	*-0.12*	
		For ASTM C840 Level 5 High Quality Finish, Add	*0.93*	
		For Spray Applied Textured Or Orange Peel Finish, Add	*0.93*	

09 29 10 00-0040 Finish Gypsum Board Ceilings, ASTM C840 Level 4 *(09 29 10 00-0036)*

09 29 10 00-0041	SF	Up To 10' High, Ceilings, Tape, Spackle And Finish Gypsum Board	1.23	
		For Up To 128, Add	*0.48*	
		For >128 To 320, Add	*0.30*	
		For >5,400, Deduct	*-0.12*	
		For ASTM C840 Level 1 Finish, Deduct	*-0.59*	
		For ASTM C840 Level 2 Finish, Deduct	*-0.30*	
		For ASTM C840 Level 3 Finish, Deduct	*-0.12*	
		For ASTM C840 Level 5 High Quality Finish, Add	*0.91*	
		For Spray Applied Textured Or Orange Peel Finish, Add	*0.91*	
09 29 10 00-0042	SF	>10' High, Ceilings, Tape, Spackle And Finish Gypsum Board	1.65	
		Note: Use this task for the entire wall area when the wall is >10' high.		
		For Up To 128, Add	*0.64*	
		For >128 To 320, Add	*0.40*	
		For >5,400, Deduct	*-0.17*	
		For ASTM C840 Level 1 Finish, Deduct	*-0.80*	
		For ASTM C840 Level 2 Finish, Deduct	*-0.40*	
		For ASTM C840 Level 3 Finish, Deduct	*-0.16*	
		For ASTM C840 Level 5 High Quality Finish, Add	*1.23*	
		For Spray Applied Textured Or Orange Peel Finish, Add	*1.23*	

09 29 10 00-0043 Finish Gypsum Board Vertical Corners, ASTM C840 Level 4 *(09 29 10 00-0036)*

Note: Inside or outside gypsum board corners.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 29 10 00-0044	LF	Up To 10' High, Vertical Corners, Tape, Spackle And Finish Gypsum Board	1.89	
		For ASTM C840 Level 1 Finish, Deduct	*-0.88*	
		For ASTM C840 Level 2 Finish, Deduct	*-0.44*	
		For ASTM C840 Level 3 Finish, Deduct	*-0.18*	
		For ASTM C840 Level 5 High Quality Finish, Add	*1.39*	
09 29 10 00-0045	LF	>10' High, Vertical Corners, Tape, Spackle And Finish Gypsum Board Note: Use this task for the entire wall area when the wall is >10' high.	2.25	
		For ASTM C840 Level 1 Finish, Deduct	*-1.06*	
		For ASTM C840 Level 2 Finish, Deduct	*-0.53*	
		For ASTM C840 Level 3 Finish, Deduct	*-0.21*	
		For ASTM C840 Level 5 High Quality Finish, Add	*1.66*	
09 29 10 00-0046		**Finish Gypsum Board Horizontal Corners, ASTM C840 Level 4** *(09 29 10 00-0036)* Note: Inside or outside gypsum board corners.		
09 29 10 00-0047	LF	Up To 10' High, Horizontal Corners, Tape, Spackle And Finish Gypsum Board	2.19	
		For ASTM C840 Level 1 Finish, Deduct	*-1.03*	
		For ASTM C840 Level 2 Finish, Deduct	*-0.52*	
		For ASTM C840 Level 3 Finish, Deduct	*-0.21*	
		For ASTM C840 Level 5 High Quality Finish, Add	*1.61*	
09 29 10 00-0048	LF	>10' High, Horizontal Corners, Tape, Spackle And Finish Gypsum Board Note: Use this task for the entire wall area when the wall is >10' high.	2.63	
		For ASTM C840 Level 1 Finish, Deduct	*-1.25*	
		For ASTM C840 Level 2 Finish, Deduct	*-0.63*	
		For ASTM C840 Level 3 Finish, Deduct	*-0.25*	
		For ASTM C840 Level 5 High Quality Finish, Add	*1.94*	
09 29 10 00-0049		**Casing And Corner Beads** *(09 29 10)*		
09 29 10 00-0050	LF	Casing, Galvanized Steel J-Bead For Gypsum Board	5.48	1.43
		For Up To 100, Add	*0.43*	
		For >500, Deduct	*-0.27*	
09 29 10 00-0051	LF	Corner Bead, Galvanized Steel For Gypsum Board	4.98	1.43
		For Up To 100, Add	*0.33*	
		For >500, Deduct	*-0.25*	
09 29 10 00-0052		**Preformed Architectural Profiles** *(09 29 10)*		
09 29 10 00-0053		**Trim Reveals For Gypsum Board** *(09 29 10 00-0052)*		
09 29 10 00-0054	LF	1/8" x 1/2" Aluminum Extrusions, Single Fin Trim Reveal For Gypsum Board	7.76	1.72
09 29 10 00-0055	LF	1/4" x 1/2" Aluminum Extrusions, Single Fin Trim Reveal For Gypsum Board	7.83	1.72
09 29 10 00-0056	LF	3/8" x 1/2" Aluminum Extrusions, Single Fin Trim Reveal For Gypsum Board	8.09	1.72
09 29 10 00-0057	LF	1/2" x 1/2" Aluminum Extrusions, Single Fin Trim Reveal For Gypsum Board	8.23	1.72
09 29 10 00-0058	LF	5/8" x 1/2" Aluminum Extrusions, Single Fin Trim Reveal For Gypsum Board	8.56	1.72
09 29 10 00-0059	LF	3/4" x 1/2" Aluminum Extrusions, Single Fin Trim Reveal For Gypsum Board	8.89	1.72
09 29 10 00-0060	LF	1" x 1/2" Aluminum Extrusions, Single Fin Trim Reveal For Gypsum Board	9.22	1.72
09 29 10 00-0061	LF	1-1/2" x 1/2" Aluminum Extrusions, Single Fin Trim Reveal For Gypsum Board	10.29	1.72
09 29 10 00-0062	LF	2" x 1/2" Aluminum Extrusions, Single Fin Trim Reveal For Gypsum Board	11.35	1.72
09 29 10 00-0063	LF	1/8" x 5/8" Aluminum Extrusions, Single Fin Trim Reveal For Gypsum Board	7.91	1.86
09 29 10 00-0064	LF	1/4" x 5/8" Aluminum Extrusions, Single Fin Trim Reveal For Gypsum Board	7.91	1.86
09 29 10 00-0065	LF	3/8" x 5/8" Aluminum Extrusions, Single Fin Trim Reveal For Gypsum Board	8.64	1.86
09 29 10 00-0066	LF	1/2" x 5/8" Aluminum Extrusions, Single Fin Trim Reveal For Gypsum Board	8.77	1.86
09 29 10 00-0067	LF	5/8" x 5/8" Aluminum Extrusions, Single Fin Trim Reveal For Gypsum Board	9.24	1.86
09 29 10 00-0068	LF	3/4" x 5/8" Aluminum Extrusions, Single Fin Trim Reveal For Gypsum Board	9.44	1.86
09 29 10 00-0069	LF	1" x 5/8" Aluminum Extrusions, Single Fin Trim Reveal For Gypsum Board	9.70	1.86
09 29 10 00-0070	LF	1 1/2" x 5/8" Aluminum Extrusions, Single Fin Trim Reveal For Gypsum Board	10.90	1.86
09 29 10 00-0071	LF	2" x 5/8" Aluminum Extrusions, Single Fin Trim Reveal For Gypsum Board	12.10	1.86
09 29 10 00-0072	LF	3" x 5/8", Aluminum Extrusions, Single Fin Trim Reveal For Gypsum Board	16.78	2.14
09 29 10 00-0073	LF	4" x 5/8", Aluminum Extrusions, Single Fin Trim Reveal For Gypsum Board	18.77	2.14
09 29 10 00-0074		**Edge Trim For Gypsum Board** *(09 29 10 00-0052)*		
09 29 10 00-0075	LF	1/2" Aluminum Extrusions, Edge Trim For Gypsum Board	7.03	1.79
09 29 10 00-0076	LF	5/8" Aluminum Extrusions, Edge Trim For Gypsum Board	7.56	1.79
09 29 10 00-0077	LF	1" Aluminum Extrusions, Edge Trim For Gypsum Board	8.89	1.97
09 29 10 00-0078	LF	1-1/4" Aluminum Extrusions, Edge Trim For Gypsum Board	9.32	2.14
09 29 10 00-0079	LF	1/2" Flexible Aluminum Extrusions, Edge Trim For Gypsum Board	13.67	1.79
09 29 10 00-0080	LF	5/8" Flexible Aluminum Extrusions, Edge Trim For Gypsum Board	14.21	1.79
09 29 10 00-0081	LF	1" Flexible Aluminum Extrusions, Edge Trim For Gypsum Board	15.54	1.97
09 29 10 00-0082	LF	1-1/4" Flexible Aluminum Extrusions, Edge Trim For Gypsum Board	15.96	2.14
09 29 10 00-0083		**Bevel Trim For Gypsum Board** *(09 29 10 00-0052)*		
09 29 10 00-0084	LF	5/16" x 1/4" Aluminum Extrusions, Bevel Trim For Gypsum Board	7.56	1.79
09 29 10 00-0085	LF	5/8" x 5/8" Aluminum Extrusions, Bevel Trim For Gypsum Board	8.69	1.97
09 29 10 00-0086		**Trim/Wainscot Caps For Gypsum Board** *(09 29 10 00-0052)*		
09 29 10 00-0087	LF	1-1/2" Wide Aluminum Extrusions, Trim/Wainscot Cap For Gypsum Board	10.45	2.14

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 29 10 00-0088		**Single Fin Wall/Trim Reveals For Gypsum Board** *(09 29 10 00-0052)*		
09 29 10 00-0089	LF	1/8" x 1/2" Aluminum Extrusions, Single Fin Wall Reveal For Gypsum Board	7.61	1.15
09 29 10 00-0090	LF	1/4" x 1/2" Aluminum Extrusions, Single Fin Wall Reveal For Gypsum Board	7.67	1.29
09 29 10 00-0091	LF	3/8" x 1/2" Aluminum Extrusions, Single Fin Wall Reveal For Gypsum Board	8.83	1.43
09 29 10 00-0092	LF	1/2" x 1/2" Aluminum Extrusions, Single Fin Wall Reveal For Gypsum Board	9.37	1.57
09 29 10 00-0093	LF	5/8" x 1/2" Aluminum Extrusions, Single Fin Wall Reveal For Gypsum Board	9.89	1.72
09 29 10 00-0094	LF	3/4" x 1/2" Aluminum Extrusions, Single Fin Wall Reveal For Gypsum Board	10.09	1.72
09 29 10 00-0095	LF	1" x 1/2" Aluminum Extrusions, Single Fin Wall Reveal For Gypsum Board	10.69	1.72
09 29 10 00-0096	LF	1-1/2" x 1/2" Aluminum Extrusions, Single Fin Wall Reveal For Gypsum Board	11.82	1.72
09 29 10 00-0097	LF	2" x 1/2" Aluminum Extrusions, Single Fin Wall Reveal For Gypsum Board	12.21	1.72
09 29 10 00-0098	LF	1/8" x 5/8" Aluminum Extrusions, Single Fin Wall Reveal For Gypsum Board	9.24	1.86
09 29 10 00-0099	LF	1/4" x 5/8" Aluminum Extrusions, Single Fin Wall Reveal For Gypsum Board	9.37	1.86
09 29 10 00-0100	LF	3/8" x 5/8" Aluminum Extrusions, Single Fin Wall Reveal For Gypsum Board	10.10	1.86
09 29 10 00-0101	LF	1/2" x 5/8" Aluminum Extrusions, Single Fin Wall Reveal For Gypsum Board	10.43	1.86
09 29 10 00-0102	LF	5/8" x 5/8" Aluminum Extrusions, Single Fin Wall Reveal For Gypsum Board	10.70	1.86
09 29 10 00-0103	LF	3/4" x 5/8" Aluminum Extrusions, Single Fin Wall Reveal For Gypsum Board	11.03	1.86
09 29 10 00-0104	LF	1" x 5/8" Aluminum Extrusions, Single Fin Wall Reveal For Gypsum Board	11.50	1.86
09 29 10 00-0105	LF	1-1/2" x 5/8" Aluminum Extrusions, Single Fin Wall Reveal For Gypsum Board	12.69	1.86
09 29 10 00-0106	LF	2" x 5/8" Aluminum Extrusions, Single Fin Wall Reveal For Gypsum Board	13.69	1.86
09 29 10 00-0107	LF	3" x 5/8" Aluminum Extrusions, Single Fin Wall Reveal For Gypsum Board	16.88	1.86
09 29 10 00-0108	LF	4" x 5/8" Aluminum Extrusions, Single Fin Wall Reveal For Gypsum Board	23.00	1.86
09 29 10 00-0109	LF	3-1/16" x 7/16", Aluminum Extrusions, Single Fin Wall Base For Gypsum Board	15.68	1.86
09 29 10 00-0110	LF	3-1/16" x 9/16", Aluminum Extrusions, Single Fin Wall Base For Gypsum Board	16.22	1.86
09 29 10 00-0111	LF	4-1/16" x 7/16", Aluminum Extrusions, Single Fin Wall Base For Gypsum Board	18.01	1.86
09 29 10 00-0112	LF	4-1/16" x 9/16", Aluminum Extrusions, Single Fin Wall Base For Gypsum Board	18.21	1.86
09 29 10 00-0113	LF	9/16" Tall with 1/2" Reveal, Aluminum Extrusions, Single Fin Wall Base With Reveal For Gypsum Board	20.80	1.86
09 29 10 00-0114	LF	5/8" Aluminum Extrusions, Single Fin Wall/Trim Reveal Hanging Track For Gypsum Board	16.95	1.86
09 29 10 00-0115		**'V' Groove Wall Reveals For Gypsum Board** *(09 29 10 00-0052)*		
09 29 10 00-0116	LF	1/4" x 5/8" Aluminum Extrusions, 'V' Groove Wall Reveal For Gypsum Board	11.41	2.57
09 29 10 00-0117	LF	3/4" x 1/2" Aluminum Extrusions, 'V' Groove Wall Reveal For Gypsum Board	13.06	2.86
09 29 10 00-0118	LF	1" x 1/2" Aluminum Extrusions, 'V' Groove Wall Reveal For Gypsum Board	14.85	3.43
09 29 10 00-0119	LF	9/32" x 5/8" Aluminum Extrusions, 'V' Groove Wall Reveal For Gypsum Board	15.02	3.71
09 29 10 00-0120		**Double Fin Wall Reveals For Gypsum Board** *(09 29 10 00-0052)*		
09 29 10 00-0121	LF	3/8" x 3/8" Aluminum Extrusions, Double Fin Wall Reveal For Gypsum Board	10.95	1.72
09 29 10 00-0122	LF	1/8" x 1/2" Aluminum Extrusions, Double Fin Wall Reveal For Gypsum Board	11.08	1.72
09 29 10 00-0123	LF	1/4" x 1/2" Aluminum Extrusions, Double Fin Wall Reveal For Gypsum Board	11.22	1.72
09 29 10 00-0124	LF	3/8" x 1/2" Aluminum Extrusions, Double Fin Wall Reveal For Gypsum Board	11.22	1.72
09 29 10 00-0125	LF	1/2" x 1/2" Aluminum Extrusions, Double Fin Wall Reveal For Gypsum Board	11.82	1.72
09 29 10 00-0126	LF	5/8" x 1/2" Aluminum Extrusions, Double Fin Wall Reveal For Gypsum Board	12.08	1.69
09 29 10 00-0127	LF	3/4" x 1/2" Aluminum Extrusions, Double Fin Wall Reveal For Gypsum Board	12.35	1.72
09 29 10 00-0128	LF	1" x 1/2" Aluminum Extrusions, Double Fin Wall Reveal For Gypsum Board	12.95	1.72
09 29 10 00-0129	LF	1-1/2" x 1/2" Aluminum Extrusions, Double Fin Wall Reveal For Gypsum Board	13.94	1.72
09 29 10 00-0130	LF	2" x 1/2" Aluminum Extrusions, Double Fin Wall Reveal For Gypsum Board	15.01	1.72
09 29 10 00-0131	LF	3/8" x 5/8" Aluminum Extrusions, Double Fin Wall Reveal For Gypsum Board	11.56	1.86
09 29 10 00-0132	LF	1/4" x 5/8" Aluminum Extrusions, Double Fin Wall Reveal For Gypsum Board	11.70	1.86
09 29 10 00-0133	LF	3/8" x 5/8" Aluminum Extrusions, Double Fin Wall Reveal For Gypsum Board	11.96	1.86
09 29 10 00-0134	LF	1/2" x 5/8" Aluminum Extrusions, Double Fin Wall Reveal For Gypsum Board	12.56	1.86
09 29 10 00-0135	LF	5/8" x 5/8" Aluminum Extrusions, Double Fin Wall Reveal For Gypsum Board	12.83	1.86
09 29 10 00-0136	LF	3/4" x 5/8" Aluminum Extrusions, Double Fin Wall Reveal For Gypsum Board	13.03	1.86
09 29 10 00-0137	LF	1" x 5/8" Aluminum Extrusions, Double Fin Wall Reveal For Gypsum Board	13.69	1.86
09 29 10 00-0138	LF	1-1/2" x 5/8" Aluminum Extrusions, Double Fin Wall Reveal For Gypsum Board	14.75	1.86
09 29 10 00-0139	LF	2" x 5/8" Aluminum Extrusions, Double Fin Wall Reveal For Gypsum Board	15.82	1.86
09 29 10 00-0140	LF	3" x 5/8" Aluminum Extrusions, Double Fin Wall Reveal For Gypsum Board	18.68	1.86
09 29 10 00-0141	LF	4" x 5/8" Aluminum Extrusions, Double Fin Wall Reveal For Gypsum Board	24.66	1.86
09 29 10 00-0142	LF	1-1/2" x 1" Aluminum Extrusions, Double Fin Wall Reveal For Gypsum Board	22.01	2.03
09 29 10 00-0143	LF	3/4" x 1 1/2" Aluminum Extrusions, Double Fin Wall Reveal For Gypsum Board	24.97	2.48
09 29 10 00-0144	LF	1-1/2" x 1-1/2" Aluminum Extrusions, Double Fin Wall Reveal For Gypsum Board	25.83	2.48
09 29 10 00-0145	LF	1/2", Aluminum Extrusions, Double Fin Hanging Track Wall Reveal For Gypsum Board	20.06	1.69
09 29 10 00-0146	LF	1 3/16", Aluminum Extrusions, Double Fin Hanging Track Wall Reveal For Gypsum Board	18.25	2.48
09 29 10 00-0147	LF	1/4" Aluminum Extrusions, Double Fin Wall Covering Joiner For Gypsum Board	13.14	1.69
09 29 10 00-0148		**Special Conditions Reveals For Gypsum Board** *(09 29 10 00-0052)*		
09 29 10 00-0149		**Radius Conditions** *(09 29 10 00-0148)*		
09 29 10 00-0150	EA	8' Long Inside Radius For Gypsum Board Note: Task used in conjunction with "Preformed Architectural Profiles" tasks.	166.17	
09 29 10 00-0151	EA	8' Long Outside Radius For Gypsum Board Note: Task used in conjunction with "Preformed Architectural Profiles" tasks.	166.17	
09 29 10 00-0152	EA	8' Long Circular / Arched Radius For Gypsum Board Note: Task used in conjunction with "Preformed Architectural Profiles" tasks.	166.17	
09 29 10 00-0153		**Knee Brace Kit** *(09 29 10 00-0148)*		
09 29 10 00-0154	EA	46" H, Aluminum Extrusions, Knee Brace Kit For Gypsum Board	354.75	17.85

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 29 10 00-0155		**Wall Bumper Rail** *(09 29 10 00-0148)*		
09 29 10 00-0156	LF	2-1/2" x 5/8", Aluminum Extrusions, Wall Bumper Rail For Gypsum Board	47.51	7.14
09 29 10 00-0157		**Corners For Gypsum Board** *(09 29 10 00-0052)*		
09 29 10 00-0158	LF	1/2"R, Aluminum Extrusions, Outside Corner For Gypsum Board	10.09	1.72
09 29 10 00-0159	LF	5/8"R, Aluminum Extrusions, Outside Corner For Gypsum Board	10.77	1.86
09 29 10 00-0160	LF	3/4"R, Aluminum Extrusions, Outside Corner For Gypsum Board	11.99	1.94
09 29 10 00-0161	LF	1"R, Aluminum Extrusions, Outside Corner For Gypsum Board	13.43	2.03
09 29 10 00-0162	LF	1-1/2" R, Aluminum Extrusions, Outside Corner For Gypsum Board	16.26	2.48
09 29 10 00-0163	LF	2" R, Aluminum Extrusions, Outside Corner For Gypsum Board	18.87	2.78
09 29 10 00-0164	LF	2-1/2" R, Aluminum Extrusions, Outside Corner For Gypsum Board	22.99	3.19
09 29 10 00-0165	LF	3" R, Aluminum Extrusions, Outside Corner For Gypsum Board	27.98	3.72
09 29 10 00-0166	LF	4" R, Aluminum Extrusions, Outside Corner For Gypsum Board	38.50	4.96
09 29 10 00-0167	LF	90 Degree 3/8" Aluminum Extrusions, Hi-Strength Corner For Gypsum Board	10.09	1.65
09 29 10 00-0168	LF	90 Degree 1-1/4" Aluminum Extrusions, Hi-Strength Corner For Gypsum Board	18.82	2.23
09 29 10 00-0169	LF	90 Degree 1-1/4" Aluminum Extrusions, Fabric Tuck Corner For Gypsum Board	13.30	2.23
09 29 10 00-0170	LF	90 Degree 1-1/4" Aluminum Extrusions, Corner With Vertical Reveal For Gypsum Board	24.67	2.23
09 29 10 00-0171	LF	45 Degree 2" Aluminum Extrusions, Corner For Gypsum Board	35.23	2.78
09 29 10 00-0172	LF	60 Degree 2" Aluminum Extrusions, Corner For Gypsum Board	33.76	2.78
09 29 10 00-0173	LF	3/4" Aluminum Extrusions, Chamfered Corner For Gypsum Board	9.80	1.94
09 29 10 00-0174	LF	5/8" R, Aluminum Extrusions, Corners Return For Gypsum Board	9.90	1.86
09 29 10 00-0175	LF	1/2" x 1/2" Aluminum Extrusions, Double Corner Step For Gypsum Board	10.02	1.72
09 29 10 00-0176	LF	5/8" x 5/8" Aluminum Extrusions, Double Corner Step For Gypsum Board	10.50	1.86
09 29 10 00-0177	LF	1" x 1" Aluminum Extrusions, Double Corner Step For Gypsum Board	14.30	2.03
09 29 10 00-0178	LF	1/2" x 1/2" Aluminum Extrusions, Triple Corner Step For Gypsum Board	12.61	1.72
09 29 10 00-0179	LF	5/8" x 5/8" Aluminum Extrusions, Triple Corner Step For Gypsum Board	13.29	1.86
09 29 10 00-0180	LF	1" x 1" Aluminum Extrusions, Triple Corner Step For Gypsum Board	19.75	2.03
09 29 10 00-0181	LF	1/3" x 1/2" Aluminum Extrusions, Quad Corner Step For Gypsum Board	21.92	1.72
09 29 10 00-0182	LF	3" Aluminum Extrusions, Bullnose For Gypsum Board	37.35	3.72
09 29 10 00-0183	LF	3-7/8" Aluminum Extrusions, Bullnose For Gypsum Board	40.01	3.72
09 29 10 00-0184	LF	5-3/8", Aluminum Extrusions, Bullnose For Gypsum Board	74.34	6.20
09 29 10 00-0185	LF	7-3/8", Aluminum Extrusions, Bullnose For Gypsum Board	123.92	8.78
09 29 10 00-0186	LF	3/4" R, Aluminum Extrusions, Inside Corner For Gypsum Board	12.05	1.91
09 29 10 00-0187	LF	1" R, Aluminum Extrusions, Inside Corner For Gypsum Board	13.83	2.00
09 29 10 00-0188	LF	1-1/2" R, Aluminum Extrusions, Inside Corner For Gypsum Board	16.59	2.44
09 29 10 00-0189	LF	2"R, Aluminum Extrusions, Inside Corner For Gypsum Board	20.47	2.75
09 29 10 00-0190	LF	2-1/2" R, Aluminum Extrusions, Inside Corner For Gypsum Board	29.30	3.15
09 29 10 00-0191	LF	3"R, Aluminum Extrusions, Inside Corner For Gypsum Board	31.57	3.67
09 29 10 00-0192	LF	4" R, Aluminum Extrusions, Inside Corner For Gypsum Board	35.58	4.88
09 29 10 00-0193	LF	3-5/8", Aluminum Extrusions, Aluminum Wall Cap For Gypsum Board	22.40	3.67
09 29 10 00-0194	LF	3-7/8", Aluminum Extrusions, Aluminum Wall Cap For Gypsum Board	22.73	3.67
09 29 10 00-0195	LF	4-3/4", Aluminum Extrusions, Aluminum Wall Cap For Gypsum Board	24.85	3.67
09 29 10 00-0196	LF	5", Aluminum Extrusions, Aluminum Wall Cap For Gypsum Board	25.52	3.67

09 29 82 Gypsum Board Fire Protection *(09 29)*

09 29 82 00-0001 Shaft Wall *(09 29 82)*

See CSI section 09 29 10 00-0036 for finishing drywall.

09 29 82 00-0002	SF	3/4" Fire Rated Shaft Wall Assembly Note: 1/4" thick fiber-cement board with tapered edges over 1/2" thick type "X" gypsum board. Excludes studs or wall structure.	8.79	3.57
		For Horizontal Installation Up To 10' High, Add	*2.43*	
		For Horizontal Installation >10' High, Add	*3.57*	
		For Walls >10' High, Add	*0.57*	
		For Up To 128, Add	*3.19*	
		For >128 To 320, Add	*1.95*	
		For >1,536, Deduct	*-0.60*	
09 29 82 00-0003	SF	7/8" Fire Rated Shaft Wall Assembly Note: 1/4" thick fiber-cement board with tapered edges over 5/8" thick type "X" gypsum board. Excludes studs or wall structure.	10.27	4.28
		For Horizontal Installation Up To 10' High, Add	*2.91*	
		For Horizontal Installation >10' High, Add	*4.29*	
		For Walls >10' High, Add	*0.69*	
		For Up To 128, Add	*3.77*	
		For >128 To 320, Add	*2.31*	
		For >1,536, Deduct	*-0.68*	
09 29 82 00-0004	SF	2-1/2", 25 Gauge C-H Stud/J-Runner, 1" Gypsum Liner Panel Shaft Wall Assembly Note: Includes sealant installed at top of wall and panel gaps. Excludes additional gypsum panels and finishing.	9.52	2.75
		For Horizontal Installation Up To 10' High, Add	*1.87*	
		For Horizontal Installation >10' High, Add	*2.75*	
		For Walls >10' High, Add	*0.44*	
		For Up To 128, Add	*3.00*	
		For >128 To 320, Add	*1.78*	
		For Glass Mat Surfaces, Add	*0.37*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 29 82 00-0005	SF	4", 25 Gauge C-H Stud/J-Runner, 1" Gypsum Liner Panel Shaft Wall Assembly	10.28	2.89
		Note: Includes sealant installed at top of wall and panel gaps. Excludes additional gypsum panels and finishing.		
		For Horizontal Installation Up To 10' High, Add	*1.96*	
		For Horizontal Installation >10' High, Add	*2.89*	
		For Walls >10' High, Add	*0.46*	
		For Up To 128, Add	*3.21*	
		For >128 To 320, Add	*1.89*	
		For Glass Mat Surfaces, Add	*0.37*	
09 29 82 00-0006	SF	2-1/2", 20 Gauge C-H Stud/J-Runner, 1" Gypsum Liner Panel Shaft Wall Assembly	11.57	2.89
		Note: Includes sealant installed at top of wall and panel gaps. Excludes additional gypsum panels and finishing.		
		For Horizontal Installation Up To 10' High, Add	*1.96*	
		For Horizontal Installation >10' High, Add	*2.89*	
		For Walls >10' High, Add	*0.46*	
		For Up To 128, Add	*3.47*	
		For >128 To 320, Add	*2.02*	
		For Glass Mat Surfaces, Add	*0.37*	
09 29 82 00-0007	SF	4", 20 Gauge C-H Stud/J-Runner, 1" Gypsum Liner Panel Shaft Wall Assembly	12.37	3.03
		Note: Includes sealant installed at top of wall and panel gaps. Excludes additional gypsum panels and finishing.		
		For Horizontal Installation Up To 10' High, Add	*2.06*	
		For Horizontal Installation >10' High, Add	*3.03*	
		For Walls >10' High, Add	*0.48*	
		For Up To 128, Add	*3.68*	
		For >128 To 320, Add	*2.14*	
		For Glass Mat Surfaces, Add	*0.37*	

09 50 Ceilings *(09)*

Note: Includes cutting for area around columns, speakers, sprinklers, diffusers, etc.

09 51 Acoustical Ceilings *(09 50)*

Note: Excludes suspension system. See CSI section 09 53 00 00-0000 for suspension systems.

09 51 13 Acoustical Panel Ceilings *(09 51)*

Note: Includes cutting around sprinkler heads, speakers, or other penetrations through the ceiling.

09 51 13 00-0001 Fiberglass Panels *(09 51 13)*

09 51 13 00-0002 Fiberglass Acoustical Panels *(09 51 13 00-0001)*

Note: Includes square or tegular edge and class A fire rating.

09 51 13 00-0003	SF	2' x 2' x 3/4" Thick, Square Edge, Fiberglass Acoustical Ceiling Panel (Armstrong Optima®)	10.90	0.57
		For Up To 50, Add	*2.38*	
		For >50 To 200, Add	*1.46*	
		For >200 To 500, Add	*0.64*	
		For >2,500 To 4,000, Deduct	*-0.27*	
		For >4,000 To 5,000, Deduct	*-0.55*	
		For >5,000, Deduct	*-0.86*	
		For Individual Room Quantities <495, Add	*1.46*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0004	SF	2' x 4' x 3/4" Thick, Square Edge, Fiberglass Acoustical Ceiling Panel (Armstrong Optima®)	10.83	0.57
		For Up To 50, Add	*2.37*	
		For >50 To 200, Add	*1.46*	
		For >200 To 500, Add	*0.63*	
		For >2,500 To 4,000, Deduct	*-0.27*	
		For >4,000 To 5,000, Deduct	*-0.54*	
		For >5,000, Deduct	*-0.86*	
		For Individual Room Quantities <495, Add	*1.46*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0005	SF	2' x 2' x 1" Thick, Square Edge, Fiberglass Acoustical Ceiling Panel (Armstrong Optima®)	11.52	0.71
		For Up To 50, Add	*2.53*	
		For >50 To 200, Add	*1.55*	
		For >200 To 500, Add	*0.68*	
		For >2,500 To 4,000, Deduct	*-0.29*	
		For >4,000 To 5,000, Deduct	*-0.58*	
		For >5,000, Deduct	*-0.91*	
		For Individual Room Quantities <495, Add	*1.55*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Ceilings >10' High, Add	*0.15*	
09 51 13 00-0006	SF	2' x 4' x 1" Thick, Square Edge, Fiberglass Acoustical Ceiling Panel (Armstrong Optima®)	11.64	0.71
		For Up To 50, Add	*2.55*	
		For >50 To 200, Add	*1.56*	
		For >200 To 500, Add	*0.68*	
		For >2,500 To 4,000, Deduct	*-0.29*	
		For >4,000 To 5,000, Deduct	*-0.58*	
		For >5,000, Deduct	*-0.92*	
		For Individual Room Quantities <495, Add	*1.56*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Ceilings >10' High, Add	*0.15*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 51 13 00-0007	SF	2' x 2' x 1" Thick, Square or Beveled Tegular Edge, Fiberglass Acoustical Ceiling Panel (Armstrong Optima® 3352, 3354, and 3355)	11.97	0.71
		For Up To 50, Add	*2.60*	
		For >50 To 200, Add	*1.60*	
		For >200 To 500, Add	*0.70*	
		For >2,500 To 4,000, Deduct	*-0.30*	
		For >4,000 To 5,000, Deduct	*-0.60*	
		For >5,000, Deduct	*-0.95*	
		For Individual Room Quantities <495, Add	*1.60*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Ceilings >10' High, Add	*0.15*	
09 51 13 00-0008	SF	2' x 4' x 1" Thick, Square Edge, Fiberglass Acoustical Ceiling Panel (Armstrong Optima® 3353)	11.95	0.71
		For Up To 50, Add	*2.59*	
		For >50 To 200, Add	*1.60*	
		For >200 To 500, Add	*0.70*	
		For >2,500 To 4,000, Deduct	*-0.30*	
		For >4,000 To 5,000, Deduct	*-0.60*	
		For >5,000, Deduct	*-0.95*	
		For Individual Room Quantities <495, Add	*1.60*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Ceilings >10' High, Add	*0.15*	
09 51 13 00-0009	SF	2' x 2' x 1" Thick, Square Edge, Fiberglass Acoustical Ceiling Panel (Armstrong Lyra™)	12.47	0.71
		For Up To 50, Add	*2.67*	
		For >50 To 200, Add	*1.65*	
		For >200 To 500, Add	*0.72*	
		For >2,500 To 4,000, Deduct	*-0.31*	
		For >4,000 To 5,000, Deduct	*-0.62*	
		For >5,000, Deduct	*-0.99*	
		For Individual Room Quantities <495, Add	*1.65*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Ceilings >10' High, Add	*0.15*	
09 51 13 00-0010	SF	2' x 4' x 1" Thick, Square Edge, Fiberglass Acoustical Ceiling Panel (Armstrong Lyra™)	12.45	0.71
		For Up To 50, Add	*2.67*	
		For >50 To 200, Add	*1.65*	
		For >200 To 500, Add	*0.72*	
		For >2,500 To 4,000, Deduct	*-0.31*	
		For >4,000 To 5,000, Deduct	*-0.62*	
		For >5,000, Deduct	*-0.98*	
		For Individual Room Quantities <495, Add	*1.65*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Ceilings >10' High, Add	*0.15*	

09 51 13 00-0011 Mineral Fiber Panels *(09 51 13)*

09 51 13 00-0012 Mineral Fiber Acoustical Ceiling Panels *(09 51 13 00-0011)*

Note: Includes square or tegular edge and class A fire rating.

09 51 13 00-0013	SF	2' x 2' x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Random Textured)	2.65	0.57
		For Up To 50, Add	*1.14*	
		For >50 To 200, Add	*0.64*	
		For >200 To 500, Add	*0.23*	
		For >2,500 To 4,000, Deduct	*-0.07*	
		For >4,000 To 5,000, Deduct	*-0.13*	
		For >5,000, Deduct	*-0.25*	
		For Individual Room Quantities <495, Add	*0.64*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0014	SF	2' x 4' x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Random Textured)	2.62	0.86
		For Up To 50, Add	*1.14*	
		For >50 To 200, Add	*0.63*	
		For >200 To 500, Add	*0.22*	
		For >2,500 To 4,000, Deduct	*-0.07*	
		For >4,000 To 5,000, Deduct	*-0.13*	
		For >5,000, Deduct	*-0.24*	
		For Individual Room Quantities <495, Add	*0.63*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0015	SF	2' x 2' x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Cortega)	3.06	0.57
		For Up To 50, Add	*1.20*	
		For >50 To 200, Add	*0.68*	
		For >200 To 500, Add	*0.25*	
		For >2,500 To 4,000, Deduct	*-0.08*	
		For >4,000 To 5,000, Deduct	*-0.15*	
		For >5,000, Deduct	*-0.28*	
		For Individual Room Quantities <495, Add	*0.68*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 51 13 00-0016	SF	2' x 4' x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Cortega)	3.04	0.85
		For Up To 50, Add	*1.20*	
		For >50 To 200, Add	*0.68*	
		For >200 To 500, Add	*0.25*	
		For >2,500 To 4,000, Deduct	*-0.08*	
		For >4,000 To 5,000, Deduct	*-0.15*	
		For >5,000, Deduct	*-0.27*	
		For Individual Room Quantities <495, Add	*0.68*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0017	SF	2' x 2' x 5/8" Thick, Beveled Tegular Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Cortega)	3.33	0.57
		For Up To 50, Add	*1.24*	
		For >50 To 200, Add	*0.71*	
		For >200 To 500, Add	*0.26*	
		For >2,500 To 4,000, Deduct	*-0.08*	
		For >4,000 To 5,000, Deduct	*-0.17*	
		For >5,000, Deduct	*-0.30*	
		For Individual Room Quantities <495, Add	*0.71*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0018	SF	2' x 4' x 5/8" Thick, Beveled Tegular Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Cortega)	3.33	0.57
		For Up To 50, Add	*1.24*	
		For >50 To 200, Add	*0.71*	
		For >200 To 500, Add	*0.26*	
		For >2,500 To 4,000, Deduct	*-0.08*	
		For >4,000 To 5,000, Deduct	*-0.17*	
		For >5,000, Deduct	*-0.30*	
		For Individual Room Quantities <495, Add	*0.71*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0019	SF	2' x 2' x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Cortega Fire Guard)	3.55	0.85
		For Up To 50, Add	*1.28*	
		For >50 To 200, Add	*0.73*	
		For >200 To 500, Add	*0.27*	
		For >2,500 To 4,000, Deduct	*-0.09*	
		For >4,000 To 5,000, Deduct	*-0.18*	
		For >5,000, Deduct	*-0.31*	
		For Individual Room Quantities <495, Add	*0.73*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0020	SF	2' x 4' x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Cortega Fire Guard)	3.56	0.85
		For Up To 50, Add	*1.28*	
		For >50 To 200, Add	*0.73*	
		For >200 To 500, Add	*0.27*	
		For >2,500 To 4,000, Deduct	*-0.09*	
		For >4,000 To 5,000, Deduct	*-0.18*	
		For >5,000, Deduct	*-0.31*	
		For Individual Room Quantities <495, Add	*0.73*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0021	SF	2' x 2' x 5/8" Thick, Beveled Tegular Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Cortega Fire Guard)	3.84	0.85
		For Up To 50, Add	*1.32*	
		For >50 To 200, Add	*0.76*	
		For >200 To 500, Add	*0.29*	
		For >2,500 To 4,000, Deduct	*-0.10*	
		For >4,000 To 5,000, Deduct	*-0.19*	
		For >5,000, Deduct	*-0.33*	
		For Individual Room Quantities <495, Add	*0.76*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0022	SF	2' x 2' x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Designer)	3.31	0.57
		For Up To 50, Add	*1.24*	
		For >50 To 200, Add	*0.70*	
		For >200 To 500, Add	*0.26*	
		For >2,500 To 4,000, Deduct	*-0.08*	
		For >4,000 To 5,000, Deduct	*-0.17*	
		For >5,000, Deduct	*-0.29*	
		For Individual Room Quantities <495, Add	*0.70*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 51 13 00-0023	SF	2' x 4' x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Designer)	3.30	0.85
		For Up To 50, Add	*1.24*	
		For >50 To 200, Add	*0.70*	
		For >200 To 500, Add	*0.26*	
		For >2,500 To 4,000, Deduct	*-0.08*	
		For >4,000 To 5,000, Deduct	*-0.17*	
		For >5,000, Deduct	*-0.29*	
		For Individual Room Quantities <495, Add	*0.70*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0024	SF	2' x 2' x 5/8" Thick, Beveled Tegular Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Designer)	3.74	0.57
		For Up To 50, Add	*1.31*	
		For >50 To 200, Add	*0.75*	
		For >200 To 500, Add	*0.28*	
		For >2,500 To 4,000, Deduct	*-0.09*	
		For >4,000 To 5,000, Deduct	*-0.19*	
		For >5,000, Deduct	*-0.33*	
		For Individual Room Quantities <495, Add	*0.75*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0025	SF	2' x 2' x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Fissured)	3.06	0.57
		For Up To 50, Add	*1.20*	
		For >50 To 200, Add	*0.68*	
		For >200 To 500, Add	*0.25*	
		For >2,500 To 4,000, Deduct	*-0.08*	
		For >4,000 To 5,000, Deduct	*-0.15*	
		For >5,000, Deduct	*-0.28*	
		For Individual Room Quantities <495, Add	*0.68*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0026	SF	2' x 4' x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Fissured)	3.04	0.57
		For Up To 50, Add	*1.20*	
		For >50 To 200, Add	*0.68*	
		For >200 To 500, Add	*0.25*	
		For >2,500 To 4,000, Deduct	*-0.08*	
		For >4,000 To 5,000, Deduct	*-0.15*	
		For >5,000, Deduct	*-0.27*	
		For Individual Room Quantities <495, Add	*0.68*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0027	SF	2' x 2' x 5/8" Thick, Beveled Tegular Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Fissured)	3.33	0.57
		For Up To 50, Add	*1.24*	
		For >50 To 200, Add	*0.71*	
		For >200 To 500, Add	*0.26*	
		For >2,500 To 4,000, Deduct	*-0.08*	
		For >4,000 To 5,000, Deduct	*-0.17*	
		For >5,000, Deduct	*-0.30*	
		For Individual Room Quantities <495, Add	*0.71*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0028	SF	2' x 2' x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Fine Fissured)	3.08	0.57
		For Up To 50, Add	*1.21*	
		For >50 To 200, Add	*0.68*	
		For >200 To 500, Add	*0.25*	
		For >2,500 To 4,000, Deduct	*-0.08*	
		For >4,000 To 5,000, Deduct	*-0.15*	
		For >5,000, Deduct	*-0.28*	
		For Individual Room Quantities <495, Add	*0.68*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0029	SF	2' x 4' x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Fine Fissured)	3.07	0.57
		For Up To 50, Add	*1.20*	
		For >50 To 200, Add	*0.68*	
		For >200 To 500, Add	*0.25*	
		For >2,500 To 4,000, Deduct	*-0.08*	
		For >4,000 To 5,000, Deduct	*-0.15*	
		For >5,000, Deduct	*-0.28*	
		For Individual Room Quantities <495, Add	*0.68*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 51 13 00-0030	SF	2' x 2' x 5/8" Thick, Beveled Tegular Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Fine Fissured)	3.48	0.57
		For Up To 50, Add	*1.27*	
		For >50 To 200, Add	*0.72*	
		For >200 To 500, Add	*0.27*	
		For >2,500 To 4,000, Deduct	*-0.09*	
		For >4,000 To 5,000, Deduct	*-0.17*	
		For >5,000, Deduct	*-0.31*	
		For Individual Room Quantities <495, Add	*0.72*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0031	SF	2' x 4' x 5/8" Thick, Beveled Tegular Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Fine Fissured)	3.48	0.57
		For Up To 50, Add	*1.27*	
		For >50 To 200, Add	*0.72*	
		For >200 To 500, Add	*0.27*	
		For >2,500 To 4,000, Deduct	*-0.09*	
		For >4,000 To 5,000, Deduct	*-0.17*	
		For >5,000, Deduct	*-0.31*	
		For Individual Room Quantities <495, Add	*0.72*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0032	SF	2' x 2' x 3/4" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Fine Fissured)	3.64	0.57
		For Up To 50, Add	*1.29*	
		For >50 To 200, Add	*0.74*	
		For >200 To 500, Add	*0.28*	
		For >2,500 To 4,000, Deduct	*-0.09*	
		For >4,000 To 5,000, Deduct	*-0.18*	
		For >5,000, Deduct	*-0.32*	
		For Individual Room Quantities <495, Add	*0.74*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0033	SF	2' x 4' x 3/4" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Fine Fissured)	4.21	0.57
		For Up To 50, Add	*1.38*	
		For >50 To 200, Add	*0.79*	
		For >200 To 500, Add	*0.30*	
		For >2,500 To 4,000, Deduct	*-0.11*	
		For >4,000 To 5,000, Deduct	*-0.21*	
		For >5,000, Deduct	*-0.36*	
		For Individual Room Quantities <495, Add	*0.79*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0034	SF	2' x 2' x 3/4" Thick, Beveled Tegular Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Fine Fissured)	3.55	0.57
		For Up To 50, Add	*1.28*	
		For >50 To 200, Add	*0.73*	
		For >200 To 500, Add	*0.27*	
		For >2,500 To 4,000, Deduct	*-0.09*	
		For >4,000 To 5,000, Deduct	*-0.18*	
		For >5,000, Deduct	*-0.31*	
		For Individual Room Quantities <495, Add	*0.73*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0035	SF	2' x 4' x 3/4" Thick, Beveled Tegular Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Fine Fissured)	4.23	0.57
		For Up To 50, Add	*1.38*	
		For >50 To 200, Add	*0.80*	
		For >200 To 500, Add	*0.30*	
		For >2,500 To 4,000, Deduct	*-0.11*	
		For >4,000 To 5,000, Deduct	*-0.21*	
		For >5,000, Deduct	*-0.36*	
		For Individual Room Quantities <495, Add	*0.80*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0036	SF	30" x 60"' x 3/4" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Fine Fissured)	3.36	0.57
		For Up To 50, Add	*1.25*	
		For >50 To 200, Add	*0.71*	
		For >200 To 500, Add	*0.26*	
		For >2,500 To 4,000, Deduct	*-0.08*	
		For >4,000 To 5,000, Deduct	*-0.17*	
		For >5,000, Deduct	*-0.30*	
		For Individual Room Quantities <495, Add	*0.71*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 51 13 00-0037	SF	2' x 2' x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Fine Fissured Fire Guard)	3.64	0.85
		For Up To 50, Add	*1.29*	
		For >50 To 200, Add	*0.74*	
		For >200 To 500, Add	*0.28*	
		For >2,500 To 4,000, Deduct	*-0.09*	
		For >4,000 To 5,000, Deduct	*-0.18*	
		For >5,000, Deduct	*-0.32*	
		For Individual Room Quantities <495, Add	*0.74*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0038	SF	2' x 4' x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Fine Fissured Fire Guard)	3.58	0.85
		For Up To 50, Add	*1.28*	
		For >50 To 200, Add	*0.73*	
		For >200 To 500, Add	*0.27*	
		For >2,500 To 4,000, Deduct	*-0.09*	
		For >4,000 To 5,000, Deduct	*-0.18*	
		For >5,000, Deduct	*-0.32*	
		For Individual Room Quantities <495, Add	*0.73*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0039	SF	2' x 2' x 5/8" Thick, Beveled Tegular Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Fine Fissured Fire Guard)	3.98	0.85
		For Up To 50, Add	*1.34*	
		For >50 To 200, Add	*0.77*	
		For >200 To 500, Add	*0.29*	
		For >2,500 To 4,000, Deduct	*-0.10*	
		For >4,000 To 5,000, Deduct	*-0.20*	
		For >5,000, Deduct	*-0.35*	
		For Individual Room Quantities <495, Add	*0.77*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0040	SF	2' x 4' x 5/8" Thick, Beveled Tegular Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Fine Fissured Fire Guard)	3.98	0.85
		For Up To 50, Add	*1.34*	
		For >50 To 200, Add	*0.77*	
		For >200 To 500, Add	*0.29*	
		For >2,500 To 4,000, Deduct	*-0.10*	
		For >4,000 To 5,000, Deduct	*-0.20*	
		For >5,000, Deduct	*-0.35*	
		For Individual Room Quantities <495, Add	*0.77*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0041	SF	2' x 2' x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Ceramaguard Fine Fissured)	8.98	1.00
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0042	SF	2' x 2' x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Georgian™)	3.81	0.57
		For Up To 50, Add	*1.32*	
		For >50 To 200, Add	*0.75*	
		For >200 To 500, Add	*0.28*	
		For >2,500 To 4,000, Deduct	*-0.10*	
		For >4,000 To 5,000, Deduct	*-0.19*	
		For >5,000, Deduct	*-0.33*	
		For Individual Room Quantities <495, Add	*0.75*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0043	SF	2' x 4' x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Georgian™)	3.80	0.57
		For Up To 50, Add	*1.31*	
		For >50 To 200, Add	*0.75*	
		For >200 To 500, Add	*0.28*	
		For >2,500 To 4,000, Deduct	*-0.10*	
		For >4,000 To 5,000, Deduct	*-0.19*	
		For >5,000, Deduct	*-0.33*	
		For Individual Room Quantities <495, Add	*0.75*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0044	SF	2' x 4' x 3/4" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Georgian™)	4.40	0.57
		For Up To 50, Add	*1.40*	
		For >50 To 200, Add	*0.81*	
		For >200 To 500, Add	*0.31*	
		For >2,500 To 4,000, Deduct	*-0.11*	
		For >4,000 To 5,000, Deduct	*-0.22*	
		For >5,000, Deduct	*-0.38*	
		For Individual Room Quantities <495, Add	*0.81*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 51 13 00-0045	SF	2' x 2' x 5/8" Thick, Beveled Tegular Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Georgian™)	4.05	0.57
		For Up To 50, Add	*1.35*	
		For >50 To 200, Add	*0.78*	
		For >200 To 500, Add	*0.30*	
		For >2,500 To 4,000, Deduct	*-0.10*	
		For >4,000 To 5,000, Deduct	*-0.20*	
		For >5,000, Deduct	*-0.35*	
		For Individual Room Quantities <495, Add	*0.78*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0046	SF	2' x 2' x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Dune)	4.00	0.57
		For Up To 50, Add	*1.34*	
		For >50 To 200, Add	*0.77*	
		For >200 To 500, Add	*0.29*	
		For >2,500 To 4,000, Deduct	*-0.10*	
		For >4,000 To 5,000, Deduct	*-0.20*	
		For >5,000, Deduct	*-0.35*	
		For Individual Room Quantities <495, Add	*0.77*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0047	SF	2' x 4' x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Dune)	4.00	0.57
		For Up To 50, Add	*1.34*	
		For >50 To 200, Add	*0.77*	
		For >200 To 500, Add	*0.29*	
		For >2,500 To 4,000, Deduct	*-0.10*	
		For >4,000 To 5,000, Deduct	*-0.20*	
		For >5,000, Deduct	*-0.35*	
		For Individual Room Quantities <495, Add	*0.77*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0048	SF	2' x 2' x 5/8" Thick, Beveled Tegular Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Dune)	4.19	0.57
		For Up To 50, Add	*1.37*	
		For >50 To 200, Add	*0.79*	
		For >200 To 500, Add	*0.30*	
		For >2,500 To 4,000, Deduct	*-0.10*	
		For >4,000 To 5,000, Deduct	*-0.21*	
		For >5,000, Deduct	*-0.36*	
		For Individual Room Quantities <495, Add	*0.79*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0049	SF	2' x 4' x 5/8" Thick, Beveled Tegular Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Dune)	4.34	0.57
		For Up To 50, Add	*1.40*	
		For >50 To 200, Add	*0.81*	
		For >200 To 500, Add	*0.31*	
		For >2,500 To 4,000, Deduct	*-0.11*	
		For >4,000 To 5,000, Deduct	*-0.22*	
		For >5,000, Deduct	*-0.37*	
		For Individual Room Quantities <495, Add	*0.81*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0050	SF	2' x 2' x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Dune Fire Guard)	4.55	0.57
		For Up To 50, Add	*1.43*	
		For >50 To 200, Add	*0.83*	
		For >200 To 500, Add	*0.32*	
		For >2,500 To 4,000, Deduct	*-0.11*	
		For >4,000 To 5,000, Deduct	*-0.23*	
		For >5,000, Deduct	*-0.39*	
		For Individual Room Quantities <495, Add	*0.83*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0051	SF	2' x 4' x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Dune Fire Guard)	4.52	0.57
		For Up To 50, Add	*1.42*	
		For >50 To 200, Add	*0.82*	
		For >200 To 500, Add	*0.32*	
		For >2,500 To 4,000, Deduct	*-0.11*	
		For >4,000 To 5,000, Deduct	*-0.23*	
		For >5,000, Deduct	*-0.39*	
		For Individual Room Quantities <495, Add	*0.82*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 51 13 00-0052	SF	2' x 2' x 3/4" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Mesa)	4.40	0.85
		For Up To 50, Add	*1.40*	
		For >50 To 200, Add	*0.81*	
		For >200 To 500, Add	*0.31*	
		For >2,500 To 4,000, Deduct	*-0.11*	
		For >4,000 To 5,000, Deduct	*-0.22*	
		For >5,000, Deduct	*-0.38*	
		For Individual Room Quantities <495, Add	*0.81*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0053	SF	2' x 4' x 3/4" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Mesa)	4.40	0.85
		For Up To 50, Add	*1.40*	
		For >50 To 200, Add	*0.81*	
		For >200 To 500, Add	*0.31*	
		For >2,500 To 4,000, Deduct	*-0.11*	
		For >4,000 To 5,000, Deduct	*-0.22*	
		For >5,000, Deduct	*-0.38*	
		For Individual Room Quantities <495, Add	*0.81*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0054	SF	2' x 2' x 3/4" Thick, Beveled Tegular Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Mesa)	4.73	0.57
		For Up To 50, Add	*1.45*	
		For >50 To 200, Add	*0.85*	
		For >200 To 500, Add	*0.33*	
		For >2,500 To 4,000, Deduct	*-0.12*	
		For >4,000 To 5,000, Deduct	*-0.24*	
		For >5,000, Deduct	*-0.40*	
		For Individual Room Quantities <495, Add	*0.85*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0055	SF	2' x 4' x 3/4" Thick, Beveled Tegular Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Mesa)	4.63	0.57
		For Up To 50, Add	*1.44*	
		For >50 To 200, Add	*0.84*	
		For >200 To 500, Add	*0.32*	
		For >2,500 To 4,000, Deduct	*-0.12*	
		For >4,000 To 5,000, Deduct	*-0.23*	
		For >5,000, Deduct	*-0.39*	
		For Individual Room Quantities <495, Add	*0.84*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0056	SF	2' x 2' x 3/4" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Cirrus)	5.60	0.85
		For Up To 50, Add	*1.58*	
		For >50 To 200, Add	*0.93*	
		For >200 To 500, Add	*0.37*	
		For >2,500 To 4,000, Deduct	*-0.14*	
		For >4,000 To 5,000, Deduct	*-0.28*	
		For >5,000, Deduct	*-0.47*	
		For Individual Room Quantities <495, Add	*0.93*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0057	SF	2' x 4' x 3/4" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Cirrus)	5.56	0.85
		For Up To 50, Add	*1.58*	
		For >50 To 200, Add	*0.93*	
		For >200 To 500, Add	*0.37*	
		For >2,500 To 4,000, Deduct	*-0.14*	
		For >4,000 To 5,000, Deduct	*-0.28*	
		For >5,000, Deduct	*-0.46*	
		For Individual Room Quantities <495, Add	*0.93*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0058	SF	2' x 2' x 3/4" Thick, Beveled Tegular Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Cirrus)	5.60	0.85
		For Up To 50, Add	*1.58*	
		For >50 To 200, Add	*0.93*	
		For >200 To 500, Add	*0.37*	
		For >2,500 To 4,000, Deduct	*-0.14*	
		For >4,000 To 5,000, Deduct	*-0.28*	
		For >5,000, Deduct	*-0.47*	
		For Individual Room Quantities <495, Add	*0.93*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 51 13 00-0059	SF	2' x 4' x 3/4" Thick, Beveled Tegular Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Cirrus)	5.56	0.85
		For Up To 50, Add	*1.58*	
		For >50 To 200, Add	*0.93*	
		For >200 To 500, Add	*0.37*	
		For >2,500 To 4,000, Deduct	*-0.14*	
		For >4,000 To 5,000, Deduct	*-0.28*	
		For >5,000, Deduct	*-0.46*	
		For Individual Room Quantities <495, Add	*0.93*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0060	SF	2' x 4' x 3/4" Thick, Beveled Tegular Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Cirrus Second Look)	6.10	0.57
		For Up To 50, Add	*1.66*	
		For >50 To 200, Add	*0.98*	
		For >200 To 500, Add	*0.40*	
		For >2,500 To 4,000, Deduct	*-0.15*	
		For >4,000 To 5,000, Deduct	*-0.31*	
		For >5,000, Deduct	*-0.50*	
		For Individual Room Quantities <495, Add	*0.98*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0061	SF	2' x 2' x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Tundra)	6.06	0.85
		For Up To 50, Add	*1.65*	
		For >50 To 200, Add	*0.98*	
		For >200 To 500, Add	*0.40*	
		For >2,500 To 4,000, Deduct	*-0.15*	
		For >4,000 To 5,000, Deduct	*-0.30*	
		For >5,000, Deduct	*-0.50*	
		For Individual Room Quantities <495, Add	*0.98*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0062	SF	2' x 4' x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Tundra)	6.05	0.85
		For Up To 50, Add	*1.65*	
		For >50 To 200, Add	*0.98*	
		For >200 To 500, Add	*0.40*	
		For >2,500 To 4,000, Deduct	*-0.15*	
		For >4,000 To 5,000, Deduct	*-0.30*	
		For >5,000, Deduct	*-0.50*	
		For Individual Room Quantities <495, Add	*0.98*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0063	SF	2' x 2' x 5/8" Thick, Beveled Tegular Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Tundra)	6.50	0.57
		For Up To 50, Add	*1.72*	
		For >50 To 200, Add	*1.02*	
		For >200 To 500, Add	*0.42*	
		For >2,500 To 4,000, Deduct	*-0.16*	
		For >4,000 To 5,000, Deduct	*-0.33*	
		For >5,000, Deduct	*-0.53*	
		For Individual Room Quantities <495, Add	*1.02*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0064	SF	2' x 4' x 5/8" Thick, Beveled Tegular Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Tundra)	6.50	0.57
		For Up To 50, Add	*1.72*	
		For >50 To 200, Add	*1.02*	
		For >200 To 500, Add	*0.42*	
		For >2,500 To 4,000, Deduct	*-0.16*	
		For >4,000 To 5,000, Deduct	*-0.33*	
		For >5,000, Deduct	*-0.53*	
		For Individual Room Quantities <495, Add	*1.02*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0065	SF	2' x 2' x 3/4" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Ultima®)	6.08	0.57
		For Up To 50, Add	*1.66*	
		For >50 To 200, Add	*0.98*	
		For >200 To 500, Add	*0.40*	
		For >2,500 To 4,000, Deduct	*-0.15*	
		For >4,000 To 5,000, Deduct	*-0.30*	
		For >5,000, Deduct	*-0.50*	
		For Individual Room Quantities <495, Add	*0.98*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 51 13 00-0066	SF	2' x 4' x 3/4" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Ultima®)	6.08	0.57
		For Up To 50, Add	*1.66*	
		For >50 To 200, Add	*0.98*	
		For >200 To 500, Add	*0.40*	
		For >2,500 To 4,000, Deduct	*-0.15*	
		For >4,000 To 5,000, Deduct	*-0.30*	
		For >5,000, Deduct	*-0.50*	
		For Individual Room Quantities <495, Add	*0.98*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0067	SF	2' x 2' x 3/4" Thick, Beveled Tegular Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Ultima®)	6.08	0.57
		For Up To 50, Add	*1.66*	
		For >50 To 200, Add	*0.98*	
		For >200 To 500, Add	*0.40*	
		For >2,500 To 4,000, Deduct	*-0.15*	
		For >4,000 To 5,000, Deduct	*-0.30*	
		For >5,000, Deduct	*-0.50*	
		For Individual Room Quantities <495, Add	*0.98*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0068	SF	2' x 4' x 3/4" Thick, Beveled Tegular Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Ultima®)	6.08	0.57
		For Up To 50, Add	*1.66*	
		For >50 To 200, Add	*0.98*	
		For >200 To 500, Add	*0.40*	
		For >2,500 To 4,000, Deduct	*-0.15*	
		For >4,000 To 5,000, Deduct	*-0.30*	
		For >5,000, Deduct	*-0.50*	
		For Individual Room Quantities <495, Add	*0.98*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0069	SF	2' x 2' x 7/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Ultima High-NRC)	6.53	0.71
		For Up To 50, Add	*1.78*	
		For >50 To 200, Add	*1.05*	
		For >200 To 500, Add	*0.43*	
		For >2,500 To 4,000, Deduct	*-0.16*	
		For >4,000 To 5,000, Deduct	*-0.33*	
		For >5,000, Deduct	*-0.54*	
		For Individual Room Quantities <495, Add	*1.05*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.90*	
		For Ceilings >10' High, Add	*0.15*	
09 51 13 00-0070	SF	2' x 4' x 7/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Ultima High-NRC)	6.53	0.71
		For Up To 50, Add	*1.78*	
		For >50 To 200, Add	*1.05*	
		For >200 To 500, Add	*0.43*	
		For >2,500 To 4,000, Deduct	*-0.16*	
		For >4,000 To 5,000, Deduct	*-0.33*	
		For >5,000, Deduct	*-0.54*	
		For Individual Room Quantities <495, Add	*1.05*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.90*	
		For Ceilings >10' High, Add	*0.15*	
09 51 13 00-0071	SF	2' x 2' x 7/8" Thick, Beveled Tegular Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Ultima High-NRC)	6.53	0.71
		For Up To 50, Add	*1.78*	
		For >50 To 200, Add	*1.05*	
		For >200 To 500, Add	*0.43*	
		For >2,500 To 4,000, Deduct	*-0.16*	
		For >4,000 To 5,000, Deduct	*-0.33*	
		For >5,000, Deduct	*-0.54*	
		For Individual Room Quantities <495, Add	*1.05*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.90*	
		For Ceilings >10' High, Add	*0.15*	
09 51 13 00-0072	SF	2' x 4' x 7/8" Thick, Beveled Tegular Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Ultima High-NRC)	6.53	0.71
		For Up To 50, Add	*1.78*	
		For >50 To 200, Add	*1.05*	
		For >200 To 500, Add	*0.43*	
		For >2,500 To 4,000, Deduct	*-0.16*	
		For >4,000 To 5,000, Deduct	*-0.33*	
		For >5,000, Deduct	*-0.54*	
		For Individual Room Quantities <495, Add	*1.05*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.90*	
		For Ceilings >10' High, Add	*0.15*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 51 13 00-0073	SF	2' x 2' x 3/4" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Ultima Health Zone™)	6.80	0.57
		For Up To 50, Add	*1.76*	
		For >50 To 200, Add	*1.05*	
		For >200 To 500, Add	*0.43*	
		For >2,500 To 4,000, Deduct	*-0.17*	
		For >4,000 To 5,000, Deduct	*-0.34*	
		For >5,000, Deduct	*-0.56*	
		For Individual Room Quantities <495, Add	*1.05*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0074	SF	2' x 4' x 3/4" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Ultima Health Zone™)	6.81	0.57
		For Up To 50, Add	*1.77*	
		For >50 To 200, Add	*1.05*	
		For >200 To 500, Add	*0.43*	
		For >2,500 To 4,000, Deduct	*-0.17*	
		For >4,000 To 5,000, Deduct	*-0.34*	
		For >5,000, Deduct	*-0.56*	
		For Individual Room Quantities <495, Add	*1.05*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0075	SF	2' x 2' x 3/4" Thick, Beveled Tegular Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Ultima Health Zone™)	6.80	0.57
		For Up To 50, Add	*1.76*	
		For >50 To 200, Add	*1.05*	
		For >200 To 500, Add	*0.43*	
		For >2,500 To 4,000, Deduct	*-0.17*	
		For >4,000 To 5,000, Deduct	*-0.34*	
		For >5,000, Deduct	*-0.56*	
		For Individual Room Quantities <495, Add	*1.05*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0076	SF	2' x 2' x 7/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Ultima Health Zone™ High-NRC)	7.70	0.57
		For Up To 50, Add	*1.96*	
		For >50 To 200, Add	*1.17*	
		For >200 To 500, Add	*0.49*	
		For >2,500 To 4,000, Deduct	*-0.19*	
		For >4,000 To 5,000, Deduct	*-0.39*	
		For >5,000, Deduct	*-0.63*	
		For Individual Room Quantities <495, Add	*1.17*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.90*	
		For Ceilings >10' High, Add	*0.15*	
09 51 13 00-0077	SF	2' x 4' x 7/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Ultima Health Zone™ High-NRC)	7.60	0.57
		For Up To 50, Add	*1.94*	
		For >50 To 200, Add	*1.16*	
		For >200 To 500, Add	*0.48*	
		For >2,500 To 4,000, Deduct	*-0.19*	
		For >4,000 To 5,000, Deduct	*-0.38*	
		For >5,000, Deduct	*-0.62*	
		For Individual Room Quantities <495, Add	*1.16*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.90*	
		For Ceilings >10' High, Add	*0.15*	
09 51 13 00-0078	SF	2' x 2' x 7/8" Thick, Beveled Tegular Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Ultima Health Zone™ High-NRC)	7.65	0.57
		For Up To 50, Add	*1.95*	
		For >50 To 200, Add	*1.17*	
		For >200 To 500, Add	*0.48*	
		For >2,500 To 4,000, Deduct	*-0.19*	
		For >4,000 To 5,000, Deduct	*-0.38*	
		For >5,000, Deduct	*-0.62*	
		For Individual Room Quantities <495, Add	*1.17*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.90*	
		For Ceilings >10' High, Add	*0.15*	
09 51 13 00-0079	SF	2' x 2' x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong VL)	7.16	0.57
		For Up To 50, Add	*1.82*	
		For >50 To 200, Add	*1.09*	
		For >200 To 500, Add	*0.45*	
		For >2,500 To 4,000, Deduct	*-0.18*	
		For >4,000 To 5,000, Deduct	*-0.36*	
		For >5,000, Deduct	*-0.58*	
		For Individual Room Quantities <495, Add	*1.09*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 51 13 00-0080	SF	2' x 4' x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong VL)	7.04	0.57
		For Up To 50, Add	*1.80*	
		For >50 To 200, Add	*1.08*	
		For >200 To 500, Add	*0.45*	
		For >2,500 To 4,000, Deduct	*-0.18*	
		For >4,000 To 5,000, Deduct	*-0.35*	
		For >5,000, Deduct	*-0.57*	
		For Individual Room Quantities <495, Add	*1.08*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0081	SF	2' x 2' x 1" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Calla)	7.78	0.71
		For Up To 50, Add	*1.97*	
		For >50 To 200, Add	*1.18*	
		For >200 To 500, Add	*0.49*	
		For >2,500 To 4,000, Deduct	*-0.19*	
		For >4,000 To 5,000, Deduct	*-0.39*	
		For >5,000, Deduct	*-0.63*	
		For Individual Room Quantities <495, Add	*1.18*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.90*	
		For Ceilings >10' High, Add	*0.15*	
09 51 13 00-0082	SF	2' x 4' x 1" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Calla)	7.78	0.71
		For Up To 50, Add	*1.97*	
		For >50 To 200, Add	*1.18*	
		For >200 To 500, Add	*0.49*	
		For >2,500 To 4,000, Deduct	*-0.19*	
		For >4,000 To 5,000, Deduct	*-0.39*	
		For >5,000, Deduct	*-0.63*	
		For Individual Room Quantities <495, Add	*1.18*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.90*	
		For Ceilings >10' High, Add	*0.15*	
09 51 13 00-0083	SF	2' x 2' x 1" Thick, Beveled Tegular Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Calla)	7.78	0.57
		For Up To 50, Add	*1.97*	
		For >50 To 200, Add	*1.18*	
		For >200 To 500, Add	*0.49*	
		For >2,500 To 4,000, Deduct	*-0.19*	
		For >4,000 To 5,000, Deduct	*-0.39*	
		For >5,000, Deduct	*-0.63*	
		For Individual Room Quantities <495, Add	*1.18*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.90*	
		For Ceilings >10' High, Add	*0.15*	
09 51 13 00-0084	SF	2' x 4' x 1" Thick, Beveled Tegular Edge, Mineral Fiber Acoustical Ceiling Panel (Armstrong Calla)	7.78	0.71
		For Up To 50, Add	*1.97*	
		For >50 To 200, Add	*1.18*	
		For >200 To 500, Add	*0.49*	
		For >2,500 To 4,000, Deduct	*-0.19*	
		For >4,000 To 5,000, Deduct	*-0.39*	
		For >5,000, Deduct	*-0.63*	
		For Individual Room Quantities <495, Add	*1.18*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.90*	
		For Ceilings >10' High, Add	*0.15*	
09 51 13 00-0085	SF	20" x 60" x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Panel (USG Radar™ 2617)	2.99	0.57
		For Individual Room Quantities <495, Add	*0.67*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0086	SF	20" x 60" x 5/8" Thick, Tapered Edge, Mineral Fiber Acoustical Ceiling Panel (USG Radar™ 2627)	3.07	0.57
		For Individual Room Quantities <495, Add	*0.68*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	
09 51 13 00-0087	SF	2' x 4' x 3/4" Tapered Edge, Mineral Fiber Acoustical Ceiling Panel (USG Radar™ Illusion Basic Two 2742)	4.43	0.57
		For Individual Room Quantities <495, Add	*0.82*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Vertical Application, Add	*0.84*	
		For Ceilings >10' High, Add	*0.14*	

09 51 13 00-0088 Clean Room, Mineral Fiber Acoustical Ceiling Panels *(09 51 13 00-0011)*

Note: Includes square or tegular edge and class A fire rating.

09 51 13 00-0089	SF	2' x 2' x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Border Panel (Armstrong Clean Room™ VL)	6.65	0.85
		For Up To 50, Add	*1.65*	
		For >50 To 200, Add	*0.99*	
		For >200 To 500, Add	*0.41*	
		For >2,500 To 4,000, Deduct	*-0.17*	
		For >4,000 To 5,000, Deduct	*-0.33*	
		For >5,000, Deduct	*-0.54*	
		For Vertical Application, Add	*0.73*	
		For Ceilings >10' High, Add	*0.12*	
		For Single Angled Tegular Edge (Reveal), Add	*2.43*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 51 13 00-0090	SF	2' x 4' x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Border Panel (Armstrong Clean Room™ VL)	6.63	0.85
		For Up To 50, Add	*1.63*	
		For >50 To 200, Add	*0.98*	
		For >200 To 500, Add	*0.41*	
		For >2,500 To 4,000, Deduct	*-0.17*	
		For >4,000 To 5,000, Deduct	*-0.33*	
		For >5,000, Deduct	*-0.54*	
		For Vertical Application, Add	*0.72*	
		For Ceilings >10' High, Add	*0.12*	
		For Single Angled Tegular Edge (Reveal), Add	*2.43*	
09 51 13 00-0091	SF	2' x 2' x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Border Panel (Armstrong Clean Room™ FL)	12.08	0.85
		For Up To 50, Add	*2.46*	
		For >50 To 200, Add	*1.53*	
		For >200 To 500, Add	*0.69*	
		For >2,500 To 4,000, Deduct	*-0.30*	
		For >4,000 To 5,000, Deduct	*-0.60*	
		For >5,000, Deduct	*-0.95*	
		For Vertical Application, Add	*0.73*	
		For Ceilings >10' High, Add	*0.12*	
		For Single Angled Tegular Edge (Reveal), Add	*4.87*	
09 51 13 00-0092	SF	2' x 4' x 5/8" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Border Panel (Armstrong Clean Room™ FL)	11.93	0.85
		For Up To 50, Add	*2.43*	
		For >50 To 200, Add	*1.51*	
		For >200 To 500, Add	*0.68*	
		For >2,500 To 4,000, Deduct	*-0.30*	
		For >4,000 To 5,000, Deduct	*-0.60*	
		For >5,000, Deduct	*-0.93*	
		For Vertical Application, Add	*0.72*	
		For Ceilings >10' High, Add	*0.12*	
		For Single Angled Tegular Edge (Reveal), Add	*4.81*	
09 51 13 00-0093	SF	2' x 2' x 3/4" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Field Panel (Armstrong Clean Room™ FL)	11.85	0.85
		For Up To 50, Add	*2.43*	
		For >50 To 200, Add	*1.51*	
		For >200 To 500, Add	*0.67*	
		For >2,500 To 4,000, Deduct	*-0.30*	
		For >4,000 To 5,000, Deduct	*-0.59*	
		For >5,000, Deduct	*-0.93*	
		For Vertical Application, Add	*0.73*	
		For Ceilings >10' High, Add	*0.12*	
		For Single Angled Tegular Edge (Reveal), Add	*4.77*	
09 51 13 00-0094	SF	2' x 4' x 3/4" Thick, Square Edge, Mineral Fiber Acoustical Ceiling Field Panel (Armstrong Clean Room™ FL)	11.80	0.85
		For Up To 50, Add	*2.41*	
		For >50 To 200, Add	*1.50*	
		For >200 To 500, Add	*0.67*	
		For >2,500 To 4,000, Deduct	*-0.30*	
		For >4,000 To 5,000, Deduct	*-0.59*	
		For >5,000, Deduct	*-0.92*	
		For Vertical Application, Add	*0.72*	
		For Ceilings >10' High, Add	*0.12*	
		For Single Angled Tegular Edge (Reveal), Add	*4.75*	

09 51 13 00-0095 Vinyl Faced, Gypsum Core Panels *(09 51 13)*

Note: National Gypsum Gold Bond Gridstone.

09 51 13 00-0096	SF	2' x 2' x 1/2", Vinyl Faced, Gypsum Core Ceiling Panel	6.77	0.57
		For Up To 50, Add	*1.65*	
		For >50 To 200, Add	*1.00*	
		For >200 To 500, Add	*0.42*	
		For >2,500 To 4,000, Deduct	*-0.17*	
		For >4,000 To 5,000, Deduct	*-0.34*	
		For >5,000, Deduct	*-0.55*	
		For Individual Room Quantities <495, Add	*1.00*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Ceilings >10' High, Add	*0.12*	
09 51 13 00-0097	SF	2' x 4' x 1/2", Vinyl Faced, Gypsum Core Ceiling Panel	6.60	0.57
		For Up To 50, Add	*1.63*	
		For >50 To 200, Add	*0.98*	
		For >200 To 500, Add	*0.41*	
		For >2,500 To 4,000, Deduct	*-0.17*	
		For >4,000 To 5,000, Deduct	*-0.33*	
		For >5,000, Deduct	*-0.53*	
		For Individual Room Quantities <495, Add	*0.98*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Ceilings >10' High, Add	*0.12*	

09 51 13 00-0098 Wood Fiber Panels *(09 51 13)*

09 51 13 00-0099	SF	2' x 2' x 1/2" Wood Fiber Acoustical Ceiling Panels	9.74	0.85
		For Up To 50, Add	*2.48*	
		For >50 To 200, Add	*1.48*	
		For >200 To 500, Add	*0.61*	
		For >2,500 To 4,000, Deduct	*-0.24*	
		For >4,000 To 5,000, Deduct	*-0.49*	
		For >5,000, Deduct	*-0.79*	
		For Individual Room Quantities <495, Add	*1.48*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Ceilings >10' High, Add	*0.19*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 51 13 00-0100	SF	2' x 4' x 1/2" Wood Fiber Acoustical Ceiling Panels	9.47	0.85
		For Up To 50, Add	*2.33*	
		For >50 To 200, Add	*1.40*	
		For >200 To 500, Add	*0.59*	
		For >2,500 To 4,000, Deduct	*-0.24*	
		For >4,000 To 5,000, Deduct	*-0.47*	
		For >5,000, Deduct	*-0.77*	
		For Individual Room Quantities <495, Add	*1.40*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Ceilings >10' High, Add	*0.17*	
09 51 13 00-0101	SF	2' x 2' x 5/8" Wood Fiber Acoustical Ceiling Panels	12.94	0.85
		For Up To 50, Add	*2.96*	
		For >50 To 200, Add	*1.80*	
		For >200 To 500, Add	*0.77*	
		For >2,500 To 4,000, Deduct	*-0.32*	
		For >4,000 To 5,000, Deduct	*-0.65*	
		For >5,000, Deduct	*-1.03*	
		For Individual Room Quantities <495, Add	*1.80*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Ceilings >10' High, Add	*0.19*	
09 51 13 00-0102	SF	2' x 4' x 5/8" Wood Fiber Acoustical Ceiling Panels	12.67	0.85
		For Up To 50, Add	*2.81*	
		For >50 To 200, Add	*1.72*	
		For >200 To 500, Add	*0.75*	
		For >2,500 To 4,000, Deduct	*-0.32*	
		For >4,000 To 5,000, Deduct	*-0.63*	
		For >5,000, Deduct	*-1.01*	
		For Individual Room Quantities <495, Add	*1.72*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Ceilings >10' High, Add	*0.17*	
09 51 13 00-0103	SF	2' x 2' x 3/4" Wood Fiber Acoustical Ceiling Panels	16.04	0.85
		For Up To 50, Add	*3.43*	
		For >50 To 200, Add	*2.11*	
		For >200 To 500, Add	*0.93*	
		For >2,500 To 4,000, Deduct	*-0.40*	
		For >4,000 To 5,000, Deduct	*-0.80*	
		For >5,000, Deduct	*-1.27*	
		For Individual Room Quantities <495, Add	*2.11*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Ceilings >10' High, Add	*0.19*	
09 51 13 00-0104	SF	2' x 4' x 3/4" Wood Fiber Acoustical Ceiling Panels	15.77	0.85
		For Up To 50, Add	*3.28*	
		For >50 To 200, Add	*2.03*	
		For >200 To 500, Add	*0.90*	
		For >2,500 To 4,000, Deduct	*-0.39*	
		For >4,000 To 5,000, Deduct	*-0.79*	
		For >5,000, Deduct	*-1.24*	
		For Individual Room Quantities <495, Add	*2.03*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Ceilings >10' High, Add	*0.17*	
09 51 13 00-0105	SF	2' x 2' x 1" Wood Fiber Acoustical Ceiling Panels	11.62	0.85
		For Up To 50, Add	*2.76*	
		For >50 To 200, Add	*1.67*	
		For >200 To 500, Add	*0.71*	
		For >2,500 To 4,000, Deduct	*-0.29*	
		For >4,000 To 5,000, Deduct	*-0.58*	
		For >5,000, Deduct	*-0.94*	
		For Individual Room Quantities <495, Add	*1.67*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Ceilings >10' High, Add	*0.19*	
09 51 13 00-0106	SF	2' x 4' x 1" Wood Fiber Acoustical Ceiling Panels	11.35	0.85
		For Up To 50, Add	*2.61*	
		For >50 To 200, Add	*1.59*	
		For >200 To 500, Add	*0.68*	
		For >2,500 To 4,000, Deduct	*-0.28*	
		For >4,000 To 5,000, Deduct	*-0.57*	
		For >5,000, Deduct	*-0.91*	
		For Individual Room Quantities <495, Add	*1.59*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Ceilings >10' High, Add	*0.17*	

09 51 13 00-0107 Removal And Reinstallation Of Acoustical Ceiling Panels *(09 51 13)*

Note: 2'x2' Or 2'x4'. Includes storage and cleaning.

09 51 13 00-0108	SF	Removal And Reinstallation Of Acoustical Panels Only	2.92	
		For Up To 50, Add	*1.61*	
		For >50 To 200, Add	*0.88*	
		For >200 To 500, Add	*0.29*	
		For >2,500 To 4,000, Deduct	*-0.07*	
		For >4,000 To 5,000, Deduct	*-0.15*	
		For >5,000, Deduct	*-0.29*	
		For Ceilings >10' High, Add	*0.22*	

09 51 23 Acoustical Tile Ceilings *(09 51)*

Note: Includes fastening with staples and/or adhesive.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 51 23 00-0001		**Mineral Fiber Acoustical Tile Ceilings** *(09 51 23)*		
09 51 23 00-0002	SF	12" x 12" x 1/2" Tongue And Groove Mineral Fiber Acoustical Ceiling Tile	7.53	1.57
		For Furring 1 x 3 Strips 12" On Center, Add	*0.50*	
		For Up To 50, Add	*2.56*	
		For >50 To 200, Add	*1.47*	
		For >200 To 500, Add	*0.56*	
		For >2,500, Deduct	*-0.38*	
		For Ceilings >10' High, Add	*0.27*	
09 51 23 00-0003	SF	12" x 12" x 5/8" Spline Mineral Fiber Acoustical Ceiling Tile	8.25	1.57
		For Furring 1 x 3 Strips 12" On Center, Add	*0.50*	
		For Up To 50, Add	*2.67*	
		For >50 To 200, Add	*1.54*	
		For >200 To 500, Add	*0.59*	
		For >2,500, Deduct	*-0.41*	
		For Placing Tiles In Suspended Ceiling System, Deduct	*-0.55*	
		For Ceilings >10' High, Add	*0.27*	
09 51 23 00-0004	SF	12" x 12" x 3/4" Spline Mineral Fiber Acoustical Ceiling Tile	9.27	1.57
		For Furring 1 x 3 Strips 12" On Center, Add	*0.50*	
		For Up To 50, Add	*2.82*	
		For >50 To 200, Add	*1.64*	
		For >200 To 500, Add	*0.64*	
		For >2,500, Deduct	*-0.46*	
		For Placing Tiles In Suspended Ceiling System, Deduct	*-0.55*	
		For Ceilings >10' High, Add	*0.27*	
09 51 23 00-0005		**Wood Fiber Acoustical Tile Ceilings** *(09 51 23)*		
09 51 23 00-0006	SF	12" x 12" x 1/2" Staple Flange Wood Fiber Acoustical Ceiling Tile	6.44	1.57
		For Furring 1 x 3 Strips 12" On Center, Add	*0.50*	
		For Up To 50, Add	*2.39*	
		For >50 To 200, Add	*1.36*	
		For >200 To 500, Add	*0.50*	
		For >2,500, Deduct	*-0.32*	
		For Ceilings >10' High, Add	*0.27*	
09 51 33		**Acoustical Metal Pan Ceilings** *(09 51)*		
09 51 33 13		**Acoustical Snap-in Metal Pan Ceilings** *(09 51 33)*		
09 51 33 13-0001		**Galvanized Steel, Acoustical Snap-In Metal Ceiling Panels** *(09 51 33 13)*		
09 51 33 13-0002	SF	24" x 24", Unperforated, Tamper-Resistant, 18 Gauge, Galvanized Steel, Acoustical Lay-In Metal Ceiling Panel (Armstrong MetalWorks™ SecureLock™)	24.88	1.25
09 51 33 13-0003	SF	24" x 24", Perforated, Tamper-Resistant, 18 Gauge, Galvanized Steel, Acoustical Lay-In Metal Ceiling Panel (Armstrong MetalWorks™ SecureLock™)	26.62	1.25
09 51 33 13-0004		**Aluminum, Acoustical Snap-In Metal Ceiling Panels** *(09 51 33 13)*		
09 51 33 13-0005	SF	24" x 24", Unperforated, 0.040" Thick, Painted Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	18.59	1.43
09 51 33 13-0006	SF	24" x 24", Unperforated, 0.040" Thick, Metallic Painted Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	31.46	1.43
09 51 33 13-0007	SF	24" x 24", Unperforated, 0.040" Thick, Wood Tone Painted Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	61.44	1.43
09 51 33 13-0008	SF	24" x 24", Unperforated, 0.040" Thick, Anodized Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	27.90	1.43
09 51 33 13-0009	SF	24" x 24", Perforated, 0.040" Thick, Painted Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	19.62	1.43
09 51 33 13-0010	SF	24" x 24", Perforated, 0.040" Thick, Metallic Painted Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	30.65	1.43
09 51 33 13-0011	SF	24" x 24", Perforated, 0.040" Thick, Wood Tone Painted Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	60.98	1.43
09 51 33 13-0012	SF	24" x 24", Perforated, 0.040" Thick, Anodized Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	27.67	1.43
09 51 33 13-0013	SF	30" x 30", Unperforated, 0.040" Thick, Painted Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	25.25	1.43
09 51 33 13-0014	SF	30" x 30", Unperforated, 0.040" Thick, Metallic Painted Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	33.18	1.43
09 51 33 13-0015	SF	30" x 30", Unperforated, 0.040" Thick, Wood Tone Painted Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	67.76	1.43
09 51 33 13-0016	SF	30" x 30", Unperforated, 0.040" Thick, Anodized Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	32.84	1.43
09 51 33 13-0017	SF	30" x 30", Perforated, 0.040" Thick, Painted Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	26.75	1.43
09 51 33 13-0018	SF	30" x 30", Perforated, 0.040" Thick, Metallic Painted Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	33.98	1.43
09 51 33 13-0019	SF	30" x 30", Perforated, 0.040" Thick, Wood Tone Painted Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	70.06	1.43
09 51 33 13-0020	SF	30" x 30", Perforated, 0.040" Thick, Anodized Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	33.64	1.43
09 51 33 13-0021	SF	12" x 48", Unperforated, 0.040" Thick, Painted Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	22.84	1.43
09 51 33 13-0022	SF	12" x 48", Unperforated, 0.040" Thick, Metallic Painted Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	37.32	1.43

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 51 33 13-0023	SF	12" x 48", Unperforated, 0.040" Thick, Wood Tone Painted Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	66.27	1.43
09 51 33 13-0024	SF	12" x 48", Unperforated, 0.040" Thick, Anodized Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	32.03	1.43
09 51 33 13-0025	SF	12" x 48", Perforated, 0.040" Thick, Painted Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	24.56	1.43
09 51 33 13-0026	SF	12" x 48", Perforated, 0.040" Thick, Metallic Painted Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	37.78	1.43
09 51 33 13-0027	SF	12" x 48", Perforated, 0.040" Thick, Wood Tone Painted Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	68.68	1.43
09 51 33 13-0028	SF	12" x 48", Perforated, 0.040" Thick, Anodized Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	33.07	1.43
09 51 33 13-0029	SF	24" x 48", Unperforated, 0.040" Thick, Painted Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	18.11	1.43
09 51 33 13-0030	SF	24" x 48", Unperforated, 0.040" Thick, Metallic Painted Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	27.76	1.43
09 51 33 13-0031	SF	24" x 48", Unperforated, 0.040" Thick, Wood Tone Painted Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	57.63	1.43
09 51 33 13-0032	SF	24" x 48", Unperforated, 0.040" Thick, Anodized Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	26.38	1.43
09 51 33 13-0033	SF	24" x 48", Perforated, 0.040" Thick, Painted Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	19.26	1.43
09 51 33 13-0034	SF	24" x 48", Perforated, 0.040" Thick, Metallic Painted Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	27.53	1.43
09 51 33 13-0035	SF	24" x 48", Perforated, 0.040" Thick, Wood Tone Painted Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	57.74	1.43
09 51 33 13-0036	SF	24" x 48", Perforated, 0.040" Thick, Anodized Aluminum, Acoustical Snap-In Metal Ceiling Panel (Armstrong MetalWorks™)	26.38	1.43

09 51 33 23 Acoustical Lay-in Metal Pan Ceilings *(09 51 33)*

09 51 33 23-0001 Acoustical Lay-In Metal Pan Ceilings *(09 51 33 23)*

09 51 33 23-0002 Aluminum, Acoustical Lay-In Metal Ceiling Panels *(09 51 33 23-0001)*

09 51 33 23-0003	SF	24" x 24", Unperforated, Painted Aluminum, Acoustical Lay-In Metal Ceiling Panel (USG Panz™)	19.37	1.08
		For Up To 50, Add	*3.76*	
		For >50 To 200, Add	*2.37*	
		For >200 To 500, Add	*1.08*	
		For >2,500 To 4,000, Deduct	*-0.48*	
		For >4,000 To 5,000, Deduct	*-0.97*	
		For >5,000, Deduct	*-1.51*	
		For Ceilings >10' High, Add	*0.16*	
09 51 33 23-0004	SF	24" x 24", Unperforated, Metallic Aluminum, Acoustical Lay-In Metal Ceiling Panel (USG Panz™)	21.96	1.08
		For Up To 50, Add	*4.15*	
		For >50 To 200, Add	*2.62*	
		For >200 To 500, Add	*1.21*	
		For >2,500 To 4,000, Deduct	*-0.55*	
		For >4,000 To 5,000, Deduct	*-1.10*	
		For >5,000, Deduct	*-1.70*	
		For Ceilings >10' High, Add	*0.16*	
09 51 33 23-0005	SF	24" x 24", Unperforated, Wood Tone Aluminum, Acoustical Lay-In Metal Ceiling Panel (USG Panz™)	32.30	1.08
		For Up To 50, Add	*5.70*	
		For >50 To 200, Add	*3.66*	
		For >200 To 500, Add	*1.72*	
		For >2,500 To 4,000, Deduct	*-0.81*	
		For >4,000 To 5,000, Deduct	*-1.62*	
		For >5,000, Deduct	*-2.48*	
		For Ceilings >10' High, Add	*0.16*	
09 51 33 23-0006	SF	24" x 24", Perforated, Painted Aluminum, Acoustical Lay-In Metal Ceiling Panel (USG Panz™)	27.41	1.08
		For Up To 50, Add	*4.97*	
		For >50 To 200, Add	*3.17*	
		For >200 To 500, Add	*1.48*	
		For >2,500 To 4,000, Deduct	*-0.69*	
		For >4,000 To 5,000, Deduct	*-1.37*	
		For >5,000, Deduct	*-2.11*	
		For Ceilings >10' High, Add	*0.16*	
09 51 33 23-0007	SF	24" x 24", Perforated, Metallic Aluminum, Acoustical Lay-In Metal Ceiling Panel (USG Panz™)	29.43	1.08
		For Up To 50, Add	*5.27*	
		For >50 To 200, Add	*3.37*	
		For >200 To 500, Add	*1.58*	
		For >2,500 To 4,000, Deduct	*-0.74*	
		For >4,000 To 5,000, Deduct	*-1.47*	
		For >5,000, Deduct	*-2.26*	
		For Ceilings >10' High, Add	*0.16*	
09 51 33 23-0008	SF	24" x 24", Perforated, Wood Tone Aluminum, Acoustical Lay-In Metal Ceiling Panel (USG Panz™)	46.37	1.08
		For Up To 50, Add	*7.81*	
		For >50 To 200, Add	*5.07*	
		For >200 To 500, Add	*2.43*	
		For >2,500 To 4,000, Deduct	*-1.16*	
		For >4,000 To 5,000, Deduct	*-2.32*	
		For >5,000, Deduct	*-3.53*	
		For Ceilings >10' High, Add	*0.16*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 51 33 23-0009	SF	30" x 30", Unperforated, Painted Aluminum, Acoustical Lay-In Metal Ceiling Panel (USG Panz™)	28.98	1.08
		For Up To 50, Add	*5.20*	
		For >50 To 200, Add	*3.33*	
		For >200 To 500, Add	*1.56*	
		For >2,500 To 4,000, Deduct	*-0.72*	
		For >4,000 To 5,000, Deduct	*-1.45*	
		For >5,000, Deduct	*-2.23*	
		For Ceilings >10' High, Add	*0.16*	
09 51 33 23-0010	SF	30" x 30", Perforated, Painted Aluminum, Acoustical Lay-In Metal Ceiling Panel (USG Panz™)	35.96	1.08
		For Up To 50, Add	*6.25*	
		For >50 To 200, Add	*4.02*	
		For >200 To 500, Add	*1.91*	
		For >2,500 To 4,000, Deduct	*-0.90*	
		For >4,000 To 5,000, Deduct	*-1.80*	
		For >5,000, Deduct	*-2.75*	
		For Ceilings >10' High, Add	*0.16*	
09 51 33 23-0011	SF	48" x 48", Unperforated, Painted Aluminum, Acoustical Lay-In Metal Ceiling Panel (USG Panz™)	29.14	1.08
		For Up To 50, Add	*5.23*	
		For >50 To 200, Add	*3.34*	
		For >200 To 500, Add	*1.56*	
		For >2,500 To 4,000, Deduct	*-0.73*	
		For >4,000 To 5,000, Deduct	*-1.46*	
		For >5,000, Deduct	*-2.24*	
		For Ceilings >10' High, Add	*0.16*	
09 51 33 23-0012	SF	48" x 48", Perforated, Painted Aluminum, Acoustical Lay-In Metal Ceiling Panel (USG Panz™)	36.17	1.08
		For Up To 50, Add	*6.28*	
		For >50 To 200, Add	*4.05*	
		For >200 To 500, Add	*1.92*	
		For >2,500 To 4,000, Deduct	*-0.90*	
		For >4,000 To 5,000, Deduct	*-1.81*	
		For >5,000, Deduct	*-2.77*	
		For Ceilings >10' High, Add	*0.16*	
09 51 33 23-0013	SF	12" x 48", Unperforated, Painted Aluminum, Acoustical Lay-In Metal Ceiling Panel (USG Panz™)	29.28	1.08
		For Up To 50, Add	*5.25*	
		For >50 To 200, Add	*3.36*	
		For >200 To 500, Add	*1.57*	
		For >2,500 To 4,000, Deduct	*-0.73*	
		For >4,000 To 5,000, Deduct	*-1.46*	
		For >5,000, Deduct	*-2.25*	
		For Ceilings >10' High, Add	*0.16*	
09 51 33 23-0014	SF	12" x 48", Perforated, Painted Aluminum, Acoustical Lay-In Metal Ceiling Panel (USG Panz™)	36.03	1.08
		For Up To 50, Add	*6.26*	
		For >50 To 200, Add	*4.03*	
		For >200 To 500, Add	*1.91*	
		For >2,500 To 4,000, Deduct	*-0.90*	
		For >4,000 To 5,000, Deduct	*-1.80*	
		For >5,000, Deduct	*-2.76*	
		For Ceilings >10' High, Add	*0.16*	
09 51 33 23-0015	SF	24" x 48", Unperforated, Painted Aluminum, Acoustical Lay-In Metal Ceiling Panel (USG Panz™)	29.28	1.08
		For Up To 50, Add	*5.25*	
		For >50 To 200, Add	*3.36*	
		For >200 To 500, Add	*1.57*	
		For >2,500 To 4,000, Deduct	*-0.73*	
		For >4,000 To 5,000, Deduct	*-1.46*	
		For >5,000, Deduct	*-2.25*	
		For Ceilings >10' High, Add	*0.16*	
09 51 33 23-0016	SF	24" x 48", Perforated, Painted Aluminum, Acoustical Lay-In Metal Ceiling Panel (USG Panz™)	36.32	1.08
		For Up To 50, Add	*6.30*	
		For >50 To 200, Add	*4.06*	
		For >200 To 500, Add	*1.92*	
		For >2,500 To 4,000, Deduct	*-0.91*	
		For >4,000 To 5,000, Deduct	*-1.82*	
		For >5,000, Deduct	*-2.78*	
		For Ceilings >10' High, Add	*0.16*	

09 51 33 23-0017 Steel, Acoustical Lay-In Metal Ceiling Panels *(09 51 33 23-0001)*

09 51 33 23-0018	SF	24" x 24", Unperforated, 0.021" Thick, Painted Steel, Acoustical Lay-In Metal Ceiling Panel (Armstrong MetalWorks™ Vector®)	25.03	1.08
		For Up To 50, Add	*4.61*	
		For >50 To 200, Add	*2.93*	
		For >200 To 500, Add	*1.36*	
		For >2,500 To 4,000, Deduct	*-0.63*	
		For >4,000 To 5,000, Deduct	*-1.25*	
		For >5,000, Deduct	*-1.93*	
		For Ceilings >10' High, Add	*0.16*	
09 51 33 23-0019	SF	24" x 24", Unperforated, 0.021" Thick, Metallic Painted Steel, Acoustical Lay-In Metal Ceiling Panel (Armstrong MetalWorks™ Vector®)	29.85	1.08
		For Up To 50, Add	*5.33*	
		For >50 To 200, Add	*3.41*	
		For >200 To 500, Add	*1.60*	
		For >2,500 To 4,000, Deduct	*-0.75*	
		For >4,000 To 5,000, Deduct	*-1.49*	
		For >5,000, Deduct	*-2.29*	
		For Ceilings >10' High, Add	*0.16*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 51 33 23-0020	SF	24" x 24", Unperforated, 0.021" Thick, Wood Tone Painted Steel, Acoustical Lay-In Metal Ceiling Panel (Armstrong MetalWorks™ Vector®)	32.03	1.08
		For Up To 50, Add	*5.66*	
		For >50 To 200, Add	*3.63*	
		For >200 To 500, Add	*1.71*	
		For >2,500 To 4,000, Deduct	*-0.80*	
		For >4,000 To 5,000, Deduct	*-1.60*	
		For >5,000, Deduct	*-2.46*	
		For Ceilings >10' High, Add	*0.16*	
09 51 33 23-0021	SF	24" x 24", Perforated, 0.021" Thick, Painted Steel, Acoustical Lay-In Metal Ceiling Panel (Armstrong MetalWorks™ Vector®)	30.08	1.08
		For Up To 50, Add	*5.37*	
		For >50 To 200, Add	*3.44*	
		For >200 To 500, Add	*1.61*	
		For >2,500 To 4,000, Deduct	*-0.75*	
		For >4,000 To 5,000, Deduct	*-1.50*	
		For >5,000, Deduct	*-2.31*	
		For Ceilings >10' High, Add	*0.16*	
09 51 33 23-0022	SF	24" x 24", Perforated, 0.021" Thick, Metallic Painted Steel, Acoustical Lay-In Metal Ceiling Panel (Armstrong MetalWorks™ Vector®)	30.88	1.08
		For Up To 50, Add	*5.49*	
		For >50 To 200, Add	*3.52*	
		For >200 To 500, Add	*1.65*	
		For >2,500 To 4,000, Deduct	*-0.77*	
		For >4,000 To 5,000, Deduct	*-1.54*	
		For >5,000, Deduct	*-2.37*	
		For Ceilings >10' High, Add	*0.16*	
09 51 33 23-0023	SF	24" x 24", Perforated, 0.021" Thick, Wood Tone Painted Steel, Acoustical Lay-In Metal Ceiling Panel (Armstrong MetalWorks™ Vector®)	32.72	1.08
		For Up To 50, Add	*5.76*	
		For >50 To 200, Add	*3.70*	
		For >200 To 500, Add	*1.74*	
		For >2,500 To 4,000, Deduct	*-0.82*	
		For >4,000 To 5,000, Deduct	*-1.64*	
		For >5,000, Deduct	*-2.51*	
		For Ceilings >10' High, Add	*0.16*	

09 51 33 33 Acoustical Tegular Lay-in Metal Pan Ceilings *(09 51 33)*

09 51 33 33-0001 Acoustical Tegular Lay-In Metal Pan Ceilings *(09 51 33 33)*

09 51 33 33-0002 Steel, Acoustical Tegular Lay-In Metal Pan Ceilings *(09 51 33 33-0001)*

09 51 33 33-0003	SF	24" x 24", Unperforated, 0.021" Thick, Painted Steel, Acoustical Tegular Lay-In Metal Ceiling Panel (Armstrong MetalWorks™)	18.25	1.08
09 51 33 33-0004	SF	24" x 24", Unperforated, 0.021" Thick, Metallic Painted Steel, Acoustical Tegular Lay-In Metal Ceiling Panel (Armstrong MetalWorks™)	20.54	1.08
09 51 33 33-0005	SF	24" x 24", Unperforated, 0.021" Thick, Wood Tone Painted Steel, Acoustical Tegular Lay-In Metal Ceiling Panel (Armstrong MetalWorks™)	29.05	1.08
09 51 33 33-0006	SF	24" x 24", Perforated, 0.021" Thick, Painted Steel, Acoustical Tegular Lay-In Metal Ceiling Panel (Armstrong MetalWorks™)	20.77	1.08
09 51 33 33-0007	SF	24" x 24", Perforated, 0.021" Thick, Metallic Painted Steel, Acoustical Tegular Lay-In Metal Ceiling Panel (Armstrong MetalWorks™)	23.53	1.08
09 51 33 33-0008	SF	24" x 24", Perforated, 0.021" Thick, Wood Tone Painted Steel, Acoustical Tegular Lay-In Metal Ceiling Panel (Armstrong MetalWorks™)	31.69	1.08

09 53 Acoustical Ceiling Suspension Assemblies *(09 50)*

09 53 13 Curved Profile Ceiling Suspension *(09 53)*

09 53 13 00-0001 Perimeter Trim *(09 53 13)*

09 53 13 00-0002	LF	2" Straight Section Axiom Perimeter Trim	25.02
09 53 13 00-0003	LF	4" Straight Section Axiom Perimeter Trim	30.51
09 53 13 00-0004	LF	6" Straight Section Axiom Perimeter Trim	34.17
09 53 13 00-0005	EA	2" Corner Section Axiom Perimeter Trim	46.13
09 53 13 00-0006	EA	4" Corner Section Axiom Perimeter Trim	59.31
09 53 13 00-0007	EA	6" Corner Section Axiom Perimeter Trim	67.00

09 53 23 Metal Acoustical Ceiling Suspension Assemblies *(09 53)*

09 53 23 00-0001 Ceiling Suspension System Assemblies *(09 53 23)*

Note: Hot-dipped galvanized steel. Includes single 8 gauge wire hangers (between 3' To 4') attached from wood deck or wood members above to main members 4' on center. Includes all main tees, cross tees, wall angle, wall anchors, connector clips, hold down clips, double faced tape (where required). All above shall be mechanically installed by minimum 2-1/4" x 3/8" wedge anchors. Excludes chain supports for lights.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 53 23 00-0002	SF	1' x 1' Grid, Concealed, Hot Dipped Galvanized Steel, 15/16" T Bar Ceiling Suspension System Assembly Note: Excludes ceiling tile.	5.42	0.71
		For Fastening To Concrete, Add	*1.65*	
		For Fastening To Steel, Add	*1.81*	
		For Vertical Application, Add	*2.71*	
		For Individual Room Quantities <495, Add	*0.58*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Up To 50, Add	*2.05*	
		For >50 To 200, Add	*1.16*	
		For >200 To 500, Add	*0.43*	
		For >2,500 To 4,000, Deduct	*-0.12*	
		For >4,000 To 5,000, Deduct	*-0.22*	
		For >5,000, Deduct	*-0.33*	
		For Ceilings >10' High, Add	*0.23*	
09 53 23 00-0003	SF	1' x 2' Grid, Hot Dipped Galvanized Steel, 15/16" T Bar Ceiling Suspension System Assembly	4.38	0.71
		For UL Listed (Fire Guard), Add	*0.27*	
		For 1-1/2" Wide Faced Grid, Add	*0.50*	
		For Fastening To Concrete, Add	*1.60*	
		For Fastening To Steel, Add	*1.76*	
		For Vertical Application, Add	*2.28*	
		For Chemical Corrosion Resistant, Polyvinyl Chloride (PVC) Coated, Add	*2.50*	
		For Individual Room Quantities <495, Add	*0.48*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Aluminum T-Bar System, Add	*0.80*	
		For Up To 50, Add	*1.70*	
		For >50 To 200, Add	*0.96*	
		For >200 To 500, Add	*0.35*	
		For >2,500 To 4,000, Deduct	*-0.10*	
		For >4,000 To 5,000, Deduct	*-0.18*	
		For >5,000, Deduct	*-0.27*	
		For Ceilings >10' High, Add	*0.20*	
09 53 23 00-0004	SF	2' x 2' Grid, Hot Dipped Galvanized Steel, 15/16" T Bar Ceiling Suspension System Assembly	3.68	0.71
		For UL Listed (Fire Guard), Add	*0.20*	
		For 1-1/2" Wide Faced Grid, Add	*0.36*	
		For Fastening To Concrete, Add	*1.58*	
		For Fastening To Steel, Add	*1.74*	
		For Vertical Application, Add	*2.08*	
		For Chemical Corrosion Resistant, Polyvinyl Chloride (PVC) Coated, Add	*2.50*	
		For Individual Room Quantities <495, Add	*0.42*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Aluminum T-Bar System, Add	*0.59*	
		For Up To 50, Add	*1.50*	
		For >50 To 200, Add	*0.84*	
		For >200 To 500, Add	*0.30*	
		For >2,500 To 4,000, Deduct	*-0.09*	
		For >4,000 To 5,000, Deduct	*-0.16*	
		For >5,000, Deduct	*-0.23*	
		For Black Grid, Add	*0.16*	
		For Ceilings >10' High, Add	*0.18*	
		For Concealed Spline Grid, Add	*0.56*	
09 53 23 00-0005	SF	2' x 4' Grid, Hot Dipped Galvanized Steel, 15/16" T Bar Ceiling Suspension System Assembly	3.05	0.71
		For UL Listed (Fire Guard), Add	*0.16*	
		For 1-1/2" Wide Faced Grid, Add	*0.29*	
		For Fastening To Concrete, Add	*1.54*	
		For Fastening To Steel, Add	*1.70*	
		For Vertical Application, Add	*2.00*	
		For Chemical Corrosion Resistant, Polyvinyl Chloride (PVC) Coated, Add	*2.50*	
		For Individual Room Quantities <495, Add	*0.35*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Aluminum T-Bar System, Add	*0.47*	
		For Up To 50, Add	*1.26*	
		For >50 To 200, Add	*0.71*	
		For >200 To 500, Add	*0.25*	
		For >2,500 To 4,000, Deduct	*-0.07*	
		For >4,000 To 5,000, Deduct	*-0.13*	
		For >5,000, Deduct	*-0.19*	
		For Black Grid, Add	*0.13*	
		For Ceilings >10' High, Add	*0.15*	
		For Concealed Spline Grid, Add	*0.46*	
09 53 23 00-0006	SF	1'-8" To 2' x 5' Grid, Hot Dipped Galvanized Steel, 15/16" T Bar Ceiling Suspension System Assembly	2.67	0.71
		For UL Listed (Fire Guard), Add	*0.14*	
		For 1-1/2" Wide Faced Grid, Add	*0.27*	
		For Fastening To Concrete, Add	*1.51*	
		For Fastening To Steel, Add	*1.67*	
		For Chemical Corrosion Resistant, Polyvinyl Chloride (PVC) Coated, Add	*2.50*	
		For Individual Room Quantities <495, Add	*0.30*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Aluminum T-Bar System, Add	*0.43*	
		For Up To 50, Add	*1.08*	
		For >50 To 200, Add	*0.61*	
		For >200 To 500, Add	*0.22*	
		For >2,500 To 4,000, Deduct	*-0.06*	
		For >4,000 To 5,000, Deduct	*-0.11*	
		For >5,000, Deduct	*-0.17*	
		For Ceilings >10' High, Add	*0.13*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 53 23 00-0007	SF	2' x 2' Grid, Hot Dipped Galvanized Steel, 9/16" T Bar Ceiling Suspension System Assembly	3.95	0.71
		For UL Listed (Fire Guard), Add	*0.24*	
		For Fastening To Concrete, Add	*1.58*	
		For Fastening To Steel, Add	*1.74*	
		For Vertical Application, Add	*2.08*	
		For Chemical Corrosion Resistant, Polyvinyl Chloride (PVC) Coated, Add	*2.50*	
		For Individual Room Quantities <495, Add	*0.44*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Up To 50, Add	*1.54*	
		For >50 To 200, Add	*0.87*	
		For >200 To 500, Add	*0.32*	
		For >2,500 To 4,000, Deduct	*-0.09*	
		For >4,000 To 5,000, Deduct	*-0.17*	
		For >5,000, Deduct	*-0.24*	
		For Black Grid, Add	*0.20*	
		For Ceilings >10' High, Add	*0.18*	
09 53 23 00-0008	SF	2' x 4' Grid, Hot Dipped Galvanized Steel, 9/16" T Bar Ceiling Suspension System Assembly	3.26	0.71
		For UL Listed (Fire Guard), Add	*0.19*	
		For Fastening To Concrete, Add	*1.54*	
		For Fastening To Steel, Add	*1.70*	
		For Vertical Application, Add	*2.00*	
		For Chemical Corrosion Resistant, Polyvinyl Chloride (PVC) Coated, Add	*2.50*	
		For Individual Room Quantities <495, Add	*0.36*	
		Note: For use with projects >500 SF. Other quantity discounts would apply.		
		For Up To 50, Add	*1.29*	
		For >50 To 200, Add	*0.73*	
		For >200 To 500, Add	*0.26*	
		For >2,500 To 4,000, Deduct	*-0.08*	
		For >4,000 To 5,000, Deduct	*-0.14*	
		For >5,000, Deduct	*-0.20*	
		For Black Grid, Add	*0.16*	
		For Ceilings >10' High, Add	*0.15*	

09 53 23 00-0009 Ceiling Suspension System Accessories *(09 53 23)*

09 53 23 00-0010	LF	Pencil Rod Support For Suspended Ceiling with Accessories	1.69	
09 53 23 00-0011	LF	1" x 1/8" Flat Bar Bracing For Suspended Ceiling	4.09	2.00
		For 304 Stainless Steel, Add	*3.11*	
		For 316 Stainless Steel, Add	*3.49*	
		For Aluminum, Add	*0.20*	
		For Galvanized Steel, Add	*0.68*	
09 53 23 00-0012	LF	1" x 3/16" Flat Bar Bracing For Suspended Ceiling	5.83	2.14
		For 304 Stainless Steel, Add	*4.73*	
		For 316 Stainless Steel, Add	*5.31*	
		For Aluminum, Add	*0.30*	
		For Galvanized Steel, Add	*1.03*	
09 53 23 00-0013	LF	1-1/2" x 1/4" Flat Bar Bracing For Suspended Ceiling	8.02	2.28
		For 304 Stainless Steel, Add	*9.43*	
		For 316 Stainless Steel, Add	*10.59*	
		For Aluminum, Add	*0.60*	
		For Galvanized Steel, Add	*2.05*	
09 53 23 00-0014	LF	12 Gauge Ceiling Suspension Wire (Seismic Control Or Where Required) For Suspended Ceiling	1.05	
09 53 23 00-0015	LF	8 Gauge Ceiling Suspension Wire (Seismic Control Or Where Required) For Suspended Ceiling	1.23	
09 53 23 00-0016	EA	2', Exposed 15/16" Hot-dipped Galvanized Steel, Suspended Ceiling Cross Tee Note: Can be used to convert an existing 2' x 4' suspension system to a 2' x 2' system or to replace an individual component.	8.64	0.41
09 53 23 00-0017	EA	Lateral Support For Suspended Ceiling Channel, Installed 12'-0" On Center Maximum Note: Includes vertical center strut and four 12 gauge diagonal wires.	33.98	10.06
09 53 23 00-0018	EA	Up To 30" Compression Posts, Telescopic, With Splay Wires, Attached To Structure For Suspended Ceiling	104.20	29.03
09 53 23 00-0019	EA	>30" To 48" Compression Posts, Telescopic, With Splay Wires, Attached To Structure For Suspended Ceiling	108.08	29.59
09 53 23 00-0020	EA	>48" To 84" Compression Posts, Telescopic, With Splay Wires, Attached To Structure For Suspended Ceiling	121.72	29.59

09 53 23 00-0021 Removal And Reinstallation Of Acoustical Ceiling Suspension Assembly *(09 53 23)*

Note: 2'x2' Or 2'x4'. Includes storage and cleaning.

09 53 23 00-0022	SF	Removal And Reinstallation Of 2' x 2' Or 2' x 4' Acoustical Ceiling Tile And Grid Assembly Note: Suspension system tie wire, wall angles and bracing to remain in place.	3.94	
		For Up To 50, Add	*2.17*	
		For >50 To 200, Add	*1.18*	
		For >200 To 500, Add	*0.39*	
		For >2,500 To 4,000, Deduct	*-0.10*	
		For >4,000 To 5,000, Deduct	*-0.20*	
		For >5,000, Deduct	*-0.30*	
		For Ceilings >10' High, Add	*0.30*	
09 53 23 00-0023	SF	Removal And Reinstallation Of Grid System Assembly Note: Suspension system tie wire, wall angles and bracing to remain in place. Excludes ceiling tiles.	1.71	
		For Up To 50, Add	*0.94*	
		For >50 To 200, Add	*0.51*	
		For >200 To 500, Add	*0.17*	
		For >2,500 To 4,000, Deduct	*-0.04*	
		For >4,000 To 5,000, Deduct	*-0.09*	
		For >5,000, Deduct	*-0.13*	
		For Ceilings >10' High, Add	*0.13*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 54 Specialty Ceilings *(09 50)*				
09 54 16 Luminous Ceilings *(09 54)*				
09 54 16 00-0001		Translucent Ceiling Panels *(09 54 16)*		
09 54 16 00-0002	SF	2' x 2' x 0.013" Thick, Rigid Vinyl Plastic, Translucent Ceiling Panel	4.00	0.71
		For Ceilings >10' High, Add	*0.12*	
		For >100 To 200, Deduct	*-0.17*	
		For >200 To 300, Deduct	*-0.44*	
		For >300, Deduct	*-0.76*	
09 54 23 Linear Metal Ceilings *(09 54)*				
09 54 23 00-0001		Linear Ceiling Systems *(09 54 23)*		
09 54 23 00-0002		0.032" Aluminum, Linear Ceiling Systems *(09 54 23 00-0001)* Note: For flat ceilings. Includes round or box style panels with KYNAR 500® or HYLAR 5000® PVDF finish. Includes ceiling suspension system and flush or recessed filler strips.		
09 54 23 00-0003	SF	4" Panel Width, 0.032" Aluminum, Linear Ceiling System	24.60	2.82
		For Up To 50, Add	*6.39*	
		For >50 To 200, Add	*3.81*	
		For >200 To 500, Add	*1.57*	
		For >2,500, Deduct	*-1.23*	
		For Ceilings >10' High, Add	*0.51*	
		For Linear Ceiling Systems Without Filler Strips, Deduct	*-4.43*	
		For Curved Ceilings, Add	*1.57*	
09 54 23 00-0004	SF	8" Panel Width, 0.032" Aluminum, Linear Ceiling System	19.88	2.82
		For Up To 50, Add	*5.63*	
		For >50 To 200, Add	*3.31*	
		For >200 To 500, Add	*1.33*	
		For >2,500, Deduct	*-0.99*	
		For Ceilings >10' High, Add	*0.50*	
		For Linear Ceiling Systems Without Filler Strips, Deduct	*-2.20*	
		For Curved Ceilings, Add	*1.55*	
09 54 23 00-0005	SF	12" Panel Width, 0.032" Aluminum, Linear Ceiling System	18.05	2.82
		For Up To 50, Add	*5.30*	
		For >50 To 200, Add	*3.10*	
		For >200 To 500, Add	*1.23*	
		For >2,500, Deduct	*-0.90*	
		For Ceilings >10' High, Add	*0.49*	
		For Linear Ceiling Systems Without Filler Strips, Deduct	*-1.46*	
		For Curved Ceilings, Add	*1.52*	
09 54 23 00-0006		Tin Ceilings *(09 54 23)*		
09 54 23 00-0007	SF	2' x 2' Tin Ceiling Embossed Panels	22.98	4.37
		For Up To 50, Add	*5.56*	
		For >50 To 200, Add	*3.35*	
		For >200 To 500, Add	*1.41*	
		For >2,500, Deduct	*-1.15*	
		For Ceilings >10' High, Add	*0.40*	
09 54 23 00-0008	SF	12" x 12" Tin Ceiling Embossed Plates	33.78	2.82
		For Up To 50, Add	*7.29*	
		For >50 To 200, Add	*4.49*	
		For >200 To 500, Add	*1.97*	
		For >2,500, Deduct	*-1.69*	
		For Ceilings >10' High, Add	*0.42*	
09 54 23 00-0009	SF	12" x 24" Tin Ceiling Embossed Plates	24.80	2.82
		For Up To 50, Add	*5.94*	
		For >50 To 200, Add	*3.59*	
		For >200 To 500, Add	*1.52*	
		For >2,500, Deduct	*-1.24*	
		For Ceilings >10' High, Add	*0.42*	
09 54 23 00-0010	SF	24" x 24" Tin Ceiling Embossed Plates	22.78	2.82
		For Up To 50, Add	*5.47*	
		For >50 To 200, Add	*3.30*	
		For >200 To 500, Add	*1.40*	
		For >2,500, Deduct	*-1.14*	
		For Ceilings >10' High, Add	*0.38*	
09 54 23 00-0011	SF	24" x 48" Tin Ceiling Embossed Plates	19.88	2.11
		For Up To 50, Add	*4.77*	
		For >50 To 200, Add	*2.88*	
		For >200 To 500, Add	*1.22*	
		For >2,500, Deduct	*-0.99*	
		For Ceilings >10' High, Add	*0.34*	
09 54 23 00-0012	LF	3" Or 4" Wide Embossed Molding	16.03	4.23
		For Ceilings >10' High, Add	*0.62*	
09 54 23 00-0013	LF	6" Wide Embossed Molding	19.95	4.93
		For Ceilings >10' High, Add	*0.69*	
09 54 23 00-0014	LF	12" Wide Embossed Molding	26.69	5.78
		For Ceilings >10' High, Add	*0.87*	
09 54 23 00-0015	EA	3", 4" Or 6" Wide Embossed Cross, Tee Or Ell	46.65	13.38
		For Ceilings >10' High, Add	*1.96*	
09 54 23 00-0016	EA	12" Wide Embossed Cross, Tee Or Ell	64.22	15.64
		For Ceilings >10' High, Add	*2.35*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

09 57 Special Function Ceilings *(09 50)*

09 57 63 High Impact Ceilings *(09 57)*

09 57 63 00-0001 High Impact Ceilings *(09 57 63)*

09 57 63 00-0002	SF	Polyvinyl Chloride Face High Impact Ceiling Panels	8.71	1.43
		For Ceilings >10' High, Add	*0.17*	
09 57 63 00-0003	EA	High Impact Clips	5.24	1.15
		For Ceilings >10' High, Add	*0.27*	

09 80 Acoustic Treatment *(09)*

09 81 Acoustic Insulation *(09 80)*

09 81 16 Acoustic Blanket Insulation *(09 81)*

09 81 16 00-0001 Sound Attenuation Fire Blankets (SAFB) *(09 81 16)*
Note: Mineral wool

09 81 16 00-0002 2.5 PCF Density, Sound Attenuation Fire Blankets (SAFB) *(09 81 16 00-0001)*

09 81 16 00-0003	SF	1-1/2" Thick, 2.5 PCF Density, Sound Attenuation Fire Blanket (Thermafiber SAFB)	2.40	0.43
09 81 16 00-0004	SF	2" Thick, 2.5 PCF Density, Sound Attenuation Fire Blanket (Thermafiber SAFB)	2.57	0.43
09 81 16 00-0005	SF	2-1/2" Thick, 2.5 PCF Density, Sound Attenuation Fire Blanket (Thermafiber SAFB)	2.81	0.43
09 81 16 00-0006	SF	3" Thick, 2.5 PCF Density, Sound Attenuation Fire Blanket (Thermafiber SAFB)	3.00	0.43
09 81 16 00-0007	SF	3-1/2" Thick, 2.5 PCF Density, Sound Attenuation Fire Blanket (Thermafiber SAFB)	3.24	0.43
09 81 16 00-0008	SF	4" Thick, 2.5 PCF Density, Sound Attenuation Fire Blanket (Thermafiber SAFB)	3.47	0.43
09 81 16 00-0009	SF	5" Thick, 2.5 PCF Density, Sound Attenuation Fire Blanket (Thermafiber SAFB)	3.78	0.43
09 81 16 00-0010	SF	6" Thick, 2.5 PCF Density, Sound Attenuation Fire Blanket (Thermafiber SAFB)	4.13	0.43

09 81 16 00-0011 4 PCF Density, Sound Attenuation Fire Blankets (SAFB) *(09 81 16 00-0001)*

09 81 16 00-0012	SF	1" Thick, 4 PCF Density, Sound Attenuation Fire Blanket (Thermafiber SAFB)	2.36	0.43

09 81 16 00-0013 Sound Attenuation Batts *(09 81 16)*
Note: NoiseReducer® by Certainteed, Quitezone® by Owens Corning, Sound-Shield® by Johns Mansville.

09 81 16 00-0014	SF	2-1/2" Thick, Unfaced Sound Attenuation Batt	1.97	0.57
09 81 16 00-0015	SF	3-1/2" Thick, Unfaced Sound Attenuation Batt	2.16	0.57
09 81 16 00-0016	SF	3-1/2" Thick, Kraft Faced Sound Attenuation Batt	2.32	0.57
09 81 16 00-0017	SF	5-1/2" Thick, Unfaced Sound Attenuation Batt	2.71	0.57
09 81 16 00-0018	SF	5-1/2" Thick, Kraft Faced Sound Attenuation Batt	2.83	0.57
09 81 16 00-0019	SF	6-1/4" Thick, Unfaced Sound Attenuation Batt	2.80	0.57
09 81 16 00-0020	SF	6-1/4" Thick, Kraft Faced Sound Attenuation Batt	2.94	0.57

09 84 Acoustic Room Components *(09 80)*

09 84 13 Fixed Sound-Absorptive Panels *(09 84)*

09 84 13 00-0001 Sound Absorbing Panels And Attenuation Blankets *(09 84 13)*
Note: No backs, 3" thick modular, ceiling or wall hung back. Excludes ceiling suspension systems and wall furring system. See CSI section 09 22 13 00-0000 for furring, 09 53 23 00-0000 for suspended ceiling support.

09 84 13 00-0002	SF	3" Thick Perforated Steel Sound Absorbing Panel Painted, No Back With Fiberglass Or Mineral Filler	14.91	2.85
09 84 13 00-0003	SF	1" Thick Fiberglass Sound Absorbing Panels With Glass Cloth Face For Walls	21.96	2.85

09 84 13 00-0004 Sound Absorbing Acoustical Wall Panel System *(09 84 13)*
See CSI section 06 11 16 00-0211 for wood furring.

09 84 13 00-0005 Fiberglass Substrate, Sound Absorbing Acoustical Wall Panel System (Armstrong® Soundsoak®) *(09 84 13 00-0004)*
Note: Includes molding and mounting hardware for flush mount.

09 84 13 00-0006	SF	1" Panel Thickness, Composed Fabric Surface (Non-Woven), Fiberglass Substrate, Sound Absorbing Acoustical Wall Panel System (Armstrong® Soundsoak® 85 Rhythms®)	19.02	3.22
09 84 13 00-0007	SF	1" Panel Thickness, Woven Fabric Surface, Fiberglass Substrate, Sound Absorbing Acoustical Wall Panel System (Armstrong® Soundsoak® 85 FR-701)	22.10	3.22
09 84 13 00-0008	SF	1" Panel Thickness, Woven Fabric Surface, Fiberglass Substrate, Sound Absorbing Acoustical Wall Panel System (Armstrong® Soundsoak® 85 Lido™)	22.10	3.22
09 84 13 00-0009	SF	1" Panel Thickness, Woven Fabric Surface, Fiberglass Substrate, Sound Absorbing Acoustical Wall Panel System (Armstrong® Soundsoak® 85 Spinel™)	25.17	3.22
09 84 13 00-0010	SF	1" Panel Thickness, Woven Fabric Surface, Fiberglass Substrate, Sound Absorbing Acoustical Wall Panel System (Armstrong® Soundsoak® 85 Zirconia™)	25.17	3.22

09 84 13 00-0011 Mineral Fiber Substrate, Sound Absorbing Acoustical Wall Panel System (Armstrong® Soundsoak®) *(09 84 13 00-0004)*
Note: Includes tackable surface, molding and mounting hardware for flush mount.

09 84 13 00-0012	SF	5/8" Panel Thickness, Vinyl Surface, Mineral Fiber Substrate, Sound Absorbing Acoustical Wall Panel System (Armstrong® Soundsoak® 60 Signature Vinyl)	16.42	3.22

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 84 13 00-0013	SF	3/4" Panel Thickness, Composed Fabric Surface (Non-Woven), Mineral Fiber Substrate, Sound Absorbing Acoustical Wall Panel System (Armstrong® Soundsoak® 60 Rhythms®)	15.24	3.22
09 84 13 00-0014	SF	3/4" Panel Thickness, Woven Fabric Surface, Mineral Fiber Substrate, Sound Absorbing Acoustical Wall Panel System (Armstrong® Soundsoak® 60 FR-701)	18.97	3.22
09 84 13 00-0015	SF	3/4" Panel Thickness, Woven Fabric Surface, Mineral Fiber Substrate, Sound Absorbing Acoustical Wall Panel System (Armstrong® Soundsoak® 60 Lido™)	19.00	3.22
09 84 13 00-0016	SF	3/4" Panel Thickness, Woven Fabric Surface, Mineral Fiber Substrate, Sound Absorbing Acoustical Wall Panel System (Armstrong® Soundsoak® 60 Spinel™)	20.89	3.22
09 84 13 00-0017	SF	3/4" Panel Thickness, Woven Fabric Surface, Mineral Fiber Substrate, Sound Absorbing Acoustical Wall Panel System (Armstrong® Soundsoak® 60 Zirconia™)	20.89	3.22

09 84 13 00-0018 Woven Fabric Covered, Fiberglass, Sound Absorbing Wall Panel System (Maharam) *(09 84 13 00-0004)*

Note: Includes molding and mounting hardware for flush mount. All panels are 3/4" thick.

09 84 13 00-0019	SF	Woven Fabric Covered, Fiberglass, Sound Absorbing Wall Panel System (Maharam Tek-Wall)	21.83	3.22
09 84 13 00-0020	SF	Woven Fabric Covered, Fiberglass, Sound Absorbing Wall Panel System (Maharam Adorn)	26.34	3.22

09 84 13 00-0021 Sound Absorbing Panel, Eggcrate Style *(09 84 13)*

Note: Ceiling or wall hung back.

09 84 13 00-0022	SF	2" Thick (Eggcrate Style) Polyurethane Sound Wave	15.65	
		For Pyramid Style, Add	*1.18*	
09 84 13 00-0023	SF	3" Thick (Eggcrate Style) Polyurethane Sound Wave	21.21	
		For Pyramid Style, Add	*1.18*	
09 84 13 00-0024	SF	4" Thick (Eggcrate Style) Polyurethane Sound Wave	28.44	
		For Pyramid Style, Add	*1.18*	
09 84 13 00-0025	SF	2" Thick (Eggcrate Style) Melamine Sound Wave	21.23	
		For Eggcrate Style With Hypalon Coating, Add	*1.97*	
		For Pyramid Style, Add	*2.05*	
		For Pyramid Style With Hypalon Coating, Add	*4.02*	
09 84 13 00-0026	SF	3" Thick (Eggcrate Style) Melamine Sound Wave	30.03	
		For Eggcrate Style With Hypalon Coating, Add	*1.97*	
		For Pyramid Style, Add	*0.42*	
		For Pyramid Style With Hypalon Coating, Add	*2.40*	
09 84 13 00-0027	SF	4" Thick (Eggcrate Style) Melamine Sound Wave	38.00	
		For Eggcrate Style With Hypalon Coating, Add	*1.97*	
		For Pyramid Style, Add	*0.42*	
		For Pyramid Style With Hypalon Coating, Add	*2.40*	

09 84 13 00-0028 Sound Deadening Fiberboard *(09 84 13)*

09 84 13 00-0029	SF	1/2" Sound Deadening Fiberboard	1.78	0.71
		For Horizontal Installation Up To 10' High, Add	*0.44*	
		For Horizontal Installation >10' High, Add	*0.65*	
		For Walls >10' High, Add	*0.10*	
		For Up To 128, Add	*0.62*	
		For >128 To 320, Add	*0.37*	

09 90 Painting and Coating *(09)*

Note: Includes masking, safety signs, cleaning of area (dry wiping down walls, floors, doors, etc.), removal of loose paint (paint, caulk, etc.), feathering rough edges, sanding between coats, protective work to contain dust and paint splatters (drop cloths), unless otherwise noted, removal and reinstallation of cabinet hardware, switch covers and outlet plates, equipment to place paint and ladders. New construction work additionally includes filling knots, divots, depressions, holes (screw and nail holes in drywall to 1/4" diameter of unlimited quantity). All work designated as "brush/roller" includes brush work for cut and roller work up to cut in. See CSI section 01 56 16 00-0001 for temporary plastic sheeting to protect existing equipment or materials, 07 92 00 00-0000 for caulking where required, 09 01 20 00-0000 for severely damaged surface preparation in excess of items included above, hand scrape, pressure washing and chemical cleaning where required, 09 29 10 00-0037 for finishing existing wall surfaces or small holes not requiring patching in excess of items included above.

09 91 Painting *(09 90)*

09 91 13 Exterior Painting *(09 91)*

Note: Acrylic latex paint unless otherwise stated. Paint tasks covers all paint sheens: flat, eggshell, satin, semi-gloss, or gloss.

09 91 13 00-0001 Paint Exterior Walls/Siding *(09 91 13)*

09 91 13 00-0002 Paint Exterior Brick Walls *(09 91 13 00-0001)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0003	LF	1 Coat Paint, Cut-in Brush Work, Paint Exterior Brick Walls	0.26	
		For Oil Based Paint, Add	*0.02*	
		For Work >15' To 20' Above Floor, Add	*0.03*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.05*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.08*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.16*	
		For >100 To 250, Add	*0.08*	
		For >250 To 500, Add	*0.03*	
		For >2,500 To 5,000, Deduct	*-0.01*	
		For >5,000 To 10,000, Deduct	*-0.03*	
		For >10,000 To 20,000, Deduct	*-0.04*	
		For >20,000, Deduct	*-0.05*	
09 91 13 00-0004	SF	1 Coat Filler, Brush Work, Paint Exterior Brick Walls	1.13	
		For Oil Based Paint, Add	*0.07*	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.46*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.67*	
		For >100 To 250, Add	*0.32*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.23*	
09 91 13 00-0005	SF	1 Coat Paint, Brush Work, Paint Exterior Brick Walls	1.60	
		For Oil Based Paint, Add	*0.10*	
		For Work >15' To 20' Above Floor, Add	*0.19*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.31*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.50*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.69*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.99*	
		For >100 To 250, Add	*0.47*	
		For >250 To 500, Add	*0.21*	
		For >2,500 To 5,000, Deduct	*-0.08*	
		For >5,000 To 10,000, Deduct	*-0.16*	
		For >10,000 To 20,000, Deduct	*-0.24*	
		For >20,000, Deduct	*-0.32*	
09 91 13 00-0006	SF	2 Coats Paint, Brush Work, Paint Exterior Brick Walls	2.37	
		For Oil Based Paint, Add	*0.15*	
		For Work >15' To 20' Above Floor, Add	*0.25*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.67*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.92*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.36*	
		For >100 To 250, Add	*0.65*	
		For >250 To 500, Add	*0.29*	
		For >2,500 To 5,000, Deduct	*-0.12*	
		For >5,000 To 10,000, Deduct	*-0.24*	
		For >10,000 To 20,000, Deduct	*-0.36*	
		For >20,000, Deduct	*-0.47*	
09 91 13 00-0007	SF	1 Coat Filler, Brush/Roller Work, Paint Exterior Brick Walls	0.80	
		For Oil Based Paint, Add	*0.06*	
		For Work >15' To 20' Above Floor, Add	*0.08*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.28*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.42*	
		For >100 To 250, Add	*0.21*	
		For >250 To 500, Add	*0.09*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.08*	
		For >10,000 To 20,000, Deduct	*-0.12*	
		For >20,000, Deduct	*-0.16*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0008	SF	1 Coat Paint, Brush/Roller Work, Paint Exterior Brick Walls	1.30	
		For Oil Based Paint, Add	*0.09*	
		For Work >15' To 20' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.34*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.47*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.71*	
		For >100 To 250, Add	*0.34*	
		For >250 To 500, Add	*0.15*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.20*	
		For >20,000, Deduct	*-0.26*	
09 91 13 00-0009	SF	2 Coats Paint, Brush/Roller Work, Paint Exterior Brick Walls	1.97	
		For Oil Based Paint, Add	*0.14*	
		For Work >15' To 20' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.29*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.47*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.64*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.00*	
		For >100 To 250, Add	*0.49*	
		For >250 To 500, Add	*0.22*	
		For >2,500 To 5,000, Deduct	*-0.10*	
		For >5,000 To 10,000, Deduct	*-0.20*	
		For >10,000 To 20,000, Deduct	*-0.30*	
		For >20,000, Deduct	*-0.39*	
09 91 13 00-0010	SF	1 Coat Filler, Sprayed, Paint Exterior Brick Walls	0.79	
		For Oil Based Paint, Add	*0.06*	
		For Work >15' To 20' Above Floor, Add	*0.07*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.38*	
		For >100 To 250, Add	*0.19*	
		For >250 To 500, Add	*0.08*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.08*	
		For >10,000 To 20,000, Deduct	*-0.12*	
		For >20,000, Deduct	*-0.16*	
09 91 13 00-0011	SF	1 Coat Paint, Sprayed, Paint Exterior Brick Walls	0.85	
		For Oil Based Paint, Add	*0.07*	
		For Work >15' To 20' Above Floor, Add	*0.05*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.19*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.34*	
		For >100 To 250, Add	*0.17*	
		For >250 To 500, Add	*0.08*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.17*	
09 91 13 00-0012	SF	2 Coats Paint, Sprayed, Paint Exterior Brick Walls	1.74	
		For Oil Based Paint, Add	*0.13*	
		For Work >15' To 20' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.49*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.80*	
		For >100 To 250, Add	*0.40*	
		For >250 To 500, Add	*0.18*	
		For >2,500 To 5,000, Deduct	*-0.09*	
		For >5,000 To 10,000, Deduct	*-0.17*	
		For >10,000 To 20,000, Deduct	*-0.26*	
		For >20,000, Deduct	*-0.35*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0013		Paint Exterior Concrete Walls *(09 91 13 00-0001)*		
09 91 13 00-0014	LF	1 Coat Paint, Cut-in Brush Work, Paint Exterior Concrete Walls	0.17	
		For Oil Based Paint, Add	*0.01*	
		For Epoxy Paint, Add	*0.02*	
		For Work >15' To 20' Above Floor, Add	*0.02*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.04*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.06*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.08*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.11*	
		For >100 To 250, Add	*0.05*	
		For >250 To 500, Add	*0.02*	
		For >2,500 To 5,000, Deduct	*-0.01*	
		For >5,000 To 10,000, Deduct	*-0.02*	
		For >10,000 To 20,000, Deduct	*-0.03*	
		For >20,000, Deduct	*-0.03*	
09 91 13 00-0015	SF	1 Coat Filler, Brush Work, Paint Exterior Concrete Walls	0.96	
		For Oil Based Paint, Add	*0.06*	
		For Epoxy Paint, Add	*0.12*	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.28*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.39*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.57*	
		For >100 To 250, Add	*0.27*	
		For >250 To 500, Add	*0.12*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.14*	
		For >20,000, Deduct	*-0.19*	
09 91 13 00-0016	SF	1 Coat Filler, Brush Work, Paint Exterior Concrete Walls	1.02	
		For Oil Based Paint, Add	*0.06*	
		For Epoxy Paint, Add	*0.11*	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.45*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.65*	
		For >100 To 250, Add	*0.31*	
		For >250 To 500, Add	*0.13*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.15*	
		For >20,000, Deduct	*-0.20*	
09 91 13 00-0017	SF	2 Coats Paint, Brush Work, Paint Exterior Concrete Walls	1.93	
		For Oil Based Paint, Add	*0.12*	
		For Epoxy Paint, Add	*0.22*	
		For Work >15' To 20' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.38*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.61*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.84*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.21*	
		For >100 To 250, Add	*0.58*	
		For >250 To 500, Add	*0.25*	
		For >2,500 To 5,000, Deduct	*-0.10*	
		For >5,000 To 10,000, Deduct	*-0.19*	
		For >10,000 To 20,000, Deduct	*-0.29*	
		For >20,000, Deduct	*-0.39*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0018	SF	1 Coat Filler, Brush/Roller Work, Paint Exterior Concrete Walls	0.80	
		For Oil Based Paint, Add	*0.05*	
		For Epoxy Paint, Add	*0.12*	
		For Work >15' To 20' Above Floor, Add	*0.08*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.30*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.45*	
		For >100 To 250, Add	*0.22*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.08*	
		For >10,000 To 20,000, Deduct	*-0.12*	
		For >20,000, Deduct	*-0.16*	
09 91 13 00-0019	SF	1 Coat Paint, Brush/Roller Work, Paint Exterior Concrete Walls	0.87	
		For Oil Based Paint, Add	*0.05*	
		For Epoxy Paint, Add	*0.10*	
		For Work >15' To 20' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.27*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.37*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.53*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.17*	
09 91 13 00-0020	SF	2 Coats Paint, Brush/Roller Work, Paint Exterior Concrete Walls	1.49	
		For Oil Based Paint, Add	*0.09*	
		For Epoxy Paint, Add	*0.19*	
		For Work >15' To 20' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.27*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.44*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.60*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.88*	
		For >100 To 250, Add	*0.42*	
		For >250 To 500, Add	*0.18*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.15*	
		For >10,000 To 20,000, Deduct	*-0.22*	
		For >20,000, Deduct	*-0.30*	
09 91 13 00-0021	SF	1 Coat Filler, Sprayed, Paint Exterior Concrete Walls	0.71	
		For Oil Based Paint, Add	*0.05*	
		For Epoxy Paint, Add	*0.13*	
		For Work >15' To 20' Above Floor, Add	*0.06*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.35*	
		For >100 To 250, Add	*0.17*	
		For >250 To 500, Add	*0.08*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.07*	
		For >10,000 To 20,000, Deduct	*-0.11*	
		For >20,000, Deduct	*-0.14*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0022	SF	1 Coat Paint, Sprayed, Paint Exterior Concrete Walls	0.64	
		For Oil Based Paint, Add	*0.04*	
		For Epoxy Paint, Add	*0.11*	
		For Work >15' To 20' Above Floor, Add	*0.06*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.33*	
		For >100 To 250, Add	*0.16*	
		For >250 To 500, Add	*0.07*	
		For >2,500 To 5,000, Deduct	*-0.03*	
		For >5,000 To 10,000, Deduct	*-0.06*	
		For >10,000 To 20,000, Deduct	*-0.10*	
		For >20,000, Deduct	*-0.13*	
09 91 13 00-0023	SF	2 Coats Paint, Sprayed, Paint Exterior Concrete Walls	1.13	
		For Oil Based Paint, Add	*0.08*	
		For Epoxy Paint, Add	*0.21*	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.25*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.35*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.55*	
		For >100 To 250, Add	*0.27*	
		For >250 To 500, Add	*0.12*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.23*	

09 91 13 00-0024 Paint Exterior Concrete Block Walls *(09 91 13 00-0001)*

09 91 13 00-0025 Paint Exterior Concrete Block Walls, Epoxy Paint *(09 91 13 00-0024)*

09 91 13 00-0026	LF	1 Coat Epoxy Paint, Cut-in Brush Work, Paint Exterior Concrete Block Walls	0.25	
		For Work >15' To 20' Above Floor, Add	*0.03*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.05*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.07*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.15*	
		For >100 To 250, Add	*0.07*	
		For >250 To 500, Add	*0.03*	
		For >2,500 To 5,000, Deduct	*-0.01*	
		For >5,000 To 10,000, Deduct	*-0.03*	
		For >10,000 To 20,000, Deduct	*-0.04*	
		For >20,000, Deduct	*-0.05*	
09 91 13 00-0027	SF	1 Coat Epoxy Filler, Brush Work, Paint Exterior Concrete Block Walls	1.38	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.37*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.51*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.77*	
		For >100 To 250, Add	*0.37*	
		For >250 To 500, Add	*0.16*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.14*	
		For >10,000 To 20,000, Deduct	*-0.21*	
		For >20,000, Deduct	*-0.28*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0028	SF	1 Coat Epoxy Paint, Brush Work, Paint Exterior Concrete Block Walls	1.56	
		For Work >15' To 20' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.28*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.44*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.61*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.90*	
		For >100 To 250, Add	*0.43*	
		For >250 To 500, Add	*0.19*	
		For >2,500 To 5,000, Deduct	*-0.08*	
		For >5,000 To 10,000, Deduct	*-0.16*	
		For >10,000 To 20,000, Deduct	*-0.23*	
		For >20,000, Deduct	*-0.31*	
09 91 13 00-0029	SF	2 Coats Epoxy Paint, Brush Work, Paint Exterior Concrete Block Walls	2.76	
		For Work >15' To 20' Above Floor, Add	*0.28*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.47*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.74*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.02*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.53*	
		For >100 To 250, Add	*0.74*	
		For >250 To 500, Add	*0.32*	
		For >2,500 To 5,000, Deduct	*-0.14*	
		For >5,000 To 10,000, Deduct	*-0.28*	
		For >10,000 To 20,000, Deduct	*-0.41*	
		For >20,000, Deduct	*-0.55*	
09 91 13 00-0030	SF	1 Coat Epoxy Filler, Brush/Roller Work, Paint Exterior Concrete Block Walls	1.16	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.28*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.39*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.60*	
		For >100 To 250, Add	*0.29*	
		For >250 To 500, Add	*0.13*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.23*	
09 91 13 00-0031	SF	1 Coat Epoxy Paint, Brush/Roller Work, Paint Exterior Concrete Block Walls	1.27	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.45*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.68*	
		For >100 To 250, Add	*0.33*	
		For >250 To 500, Add	*0.15*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.19*	
		For >20,000, Deduct	*-0.25*	
09 91 13 00-0032	SF	2 Coats Epoxy Paint, Brush/Roller Work, Paint Exterior Concrete Block Walls	2.28	
		For Work >15' To 20' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.35*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.55*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.76*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.17*	
		For >100 To 250, Add	*0.57*	
		For >250 To 500, Add	*0.25*	
		For >2,500 To 5,000, Deduct	*-0.11*	
		For >5,000 To 10,000, Deduct	*-0.23*	
		For >10,000 To 20,000, Deduct	*-0.34*	
		For >20,000, Deduct	*-0.46*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0033	SF	1 Coat Epoxy Filler, Sprayed, Paint Exterior Concrete Block Walls	0.98	
		For Work >15' To 20' Above Floor, Add	*0.06*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.41*	
		For >100 To 250, Add	*0.21*	
		For >250 To 500, Add	*0.09*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.15*	
		For >20,000, Deduct	*-0.20*	
09 91 13 00-0034	SF	1 Coat Epoxy Paint, Sprayed, Paint Exterior Concrete Block Walls	1.07	
		For Work >15' To 20' Above Floor, Add	*0.08*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.29*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.47*	
		For >100 To 250, Add	*0.24*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.16*	
		For >20,000, Deduct	*-0.21*	
09 91 13 00-0035	SF	2 Coats Epoxy Paint, Sprayed, Paint Exterior Concrete Block Walls	2.10	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.38*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.52*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.89*	
		For >100 To 250, Add	*0.45*	
		For >250 To 500, Add	*0.20*	
		For >2,500 To 5,000, Deduct	*-0.11*	
		For >5,000 To 10,000, Deduct	*-0.21*	
		For >10,000 To 20,000, Deduct	*-0.32*	
		For >20,000, Deduct	*-0.42*	

09 91 13 00-0036 Paint Exterior Concrete Block Walls, Acrylic Latex Paint *(09 91 13 00-0024)*

09 91 13 00-0037	LF	1 Coat Paint, Cut-in Brush Work, Paint Exterior Concrete Block Walls	0.25	
		For Oil Based Paint, Add	*0.02*	
		For Work >15' To 20' Above Floor, Add	*0.03*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.05*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.07*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.15*	
		For >100 To 250, Add	*0.07*	
		For >250 To 500, Add	*0.03*	
		For >2,500 To 5,000, Deduct	*-0.01*	
		For >5,000 To 10,000, Deduct	*-0.03*	
		For >10,000 To 20,000, Deduct	*-0.04*	
		For >20,000, Deduct	*-0.05*	
09 91 13 00-0038	SF	1 Coat Filler, Brush Work, Paint Exterior Concrete Block Walls	1.23	
		For Oil Based Paint, Add	*0.08*	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.37*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.51*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.74*	
		For >100 To 250, Add	*0.36*	
		For >250 To 500, Add	*0.15*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.18*	
		For >20,000, Deduct	*-0.25*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0039	SF	1 Coat Paint, Brush Work, Paint Exterior Concrete Block Walls	1.47	
		For Oil Based Paint, Add	*0.09*	
		For Work >15' To 20' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.27*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.43*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.59*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.86*	
		For >100 To 250, Add	*0.41*	
		For >250 To 500, Add	*0.18*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.15*	
		For >10,000 To 20,000, Deduct	*-0.22*	
		For >20,000, Deduct	*-0.29*	
09 91 13 00-0040	SF	2 Coats Paint, Brush Work, Paint Exterior Concrete Block Walls	2.71	
		For Oil Based Paint, Add	*0.18*	
		For Work >15' To 20' Above Floor, Add	*0.29*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.48*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.76*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.05*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.55*	
		For >100 To 250, Add	*0.75*	
		For >250 To 500, Add	*0.33*	
		For >2,500 To 5,000, Deduct	*-0.14*	
		For >5,000 To 10,000, Deduct	*-0.27*	
		For >10,000 To 20,000, Deduct	*-0.41*	
		For >20,000, Deduct	*-0.54*	
09 91 13 00-0041	SF	1 Coat Texture Paint, Brush Work, Paint Exterior Concrete Block Walls	1.64	
		For Oil Based Paint, Add	*0.10*	
		For Work >15' To 20' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.30*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.48*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.65*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.96*	
		For >100 To 250, Add	*0.46*	
		For >250 To 500, Add	*0.20*	
		For >2,500 To 5,000, Deduct	*-0.08*	
		For >5,000 To 10,000, Deduct	*-0.16*	
		For >10,000 To 20,000, Deduct	*-0.25*	
		For >20,000, Deduct	*-0.33*	
09 91 13 00-0042	SF	1 Coat Filler, Brush/Roller Work, Paint Exterior Concrete Block Walls	0.99	
		For Oil Based Paint, Add	*0.06*	
		For Work >15' To 20' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.28*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.38*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.56*	
		For >100 To 250, Add	*0.27*	
		For >250 To 500, Add	*0.12*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.15*	
		For >20,000, Deduct	*-0.20*	
09 91 13 00-0043	SF	1 Coat Paint, Brush/Roller Work, Paint Exterior Concrete Block Walls	1.27	
		For Oil Based Paint, Add	*0.08*	
		For Work >15' To 20' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.35*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.48*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.71*	
		For >100 To 250, Add	*0.34*	
		For >250 To 500, Add	*0.15*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.19*	
		For >20,000, Deduct	*-0.25*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0044	SF	2 Coats Paint, Brush/Roller Work, Paint Exterior Concrete Block Walls	2.22	
		For Oil Based Paint, Add	*0.15*	
		For Work >15' To 20' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.57*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.78*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.19*	
		For >100 To 250, Add	*0.58*	
		For >250 To 500, Add	*0.25*	
		For >2,500 To 5,000, Deduct	*-0.11*	
		For >5,000 To 10,000, Deduct	*-0.22*	
		For >10,000 To 20,000, Deduct	*-0.33*	
		For >20,000, Deduct	*-0.44*	
09 91 13 00-0045	SF	1 Coat Texture Paint, Brush/Roller Work, Paint Exterior Concrete Block Walls	1.42	
		For Oil Based Paint, Add	*0.09*	
		For Work >15' To 20' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.39*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.53*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.80*	
		For >100 To 250, Add	*0.38*	
		For >250 To 500, Add	*0.17*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.14*	
		For >10,000 To 20,000, Deduct	*-0.21*	
		For >20,000, Deduct	*-0.28*	
09 91 13 00-0046	SF	1 Coat Filler, Sprayed, Paint Exterior Concrete Block Walls	0.99	
		For Oil Based Paint, Add	*0.07*	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.50*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.15*	
		For >20,000, Deduct	*-0.20*	
09 91 13 00-0047	SF	1 Coat Paint, Sprayed, Paint Exterior Concrete Block Walls	1.06	
		For Oil Based Paint, Add	*0.08*	
		For Work >15' To 20' Above Floor, Add	*0.08*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.31*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.50*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.16*	
		For >20,000, Deduct	*-0.21*	
09 91 13 00-0048	SF	2 Coats Paint, Sprayed, Paint Exterior Concrete Block Walls	1.58	
		For Oil Based Paint, Add	*0.11*	
		For Work >15' To 20' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.25*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.39*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.54*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.83*	
		For >100 To 250, Add	*0.40*	
		For >250 To 500, Add	*0.18*	
		For >2,500 To 5,000, Deduct	*-0.08*	
		For >5,000 To 10,000, Deduct	*-0.16*	
		For >10,000 To 20,000, Deduct	*-0.24*	
		For >20,000, Deduct	*-0.32*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0049	SF	1 Coat Texture Paint, Sprayed, Paint Exterior Concrete Block Walls	1.35	
		For Oil Based Paint, Add	*0.10*	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.19*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.30*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.41*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.65*	
		For >100 To 250, Add	*0.32*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.14*	
		For >10,000 To 20,000, Deduct	*-0.20*	
		For >20,000, Deduct	*-0.27*	

09 91 13 00-0050 Paint Exterior Drywall/Plaster Walls *(09 91 13 00-0001)*

09 91 13 00-0051	LF	1 Coat Paint, Cut-in Brush Work, Paint Exterior Drywall/Plaster Walls	0.17	
		For Oil Based Paint, Add	*0.01*	
		For Work >15' To 20' Above Floor, Add	*0.02*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.04*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.06*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.08*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.11*	
		For >100 To 250, Add	*0.05*	
		For >250 To 500, Add	*0.02*	
		For >2,500 To 5,000, Deduct	*-0.01*	
		For >5,000 To 10,000, Deduct	*-0.02*	
		For >10,000 To 20,000, Deduct	*-0.03*	
		For >20,000, Deduct	*-0.03*	
		For Epoxy Paint, Add	*0.02*	
09 91 13 00-0052	SF	1 Coat Primer, Brush Work, Paint Exterior Drywall/Plaster Wall	0.99	
		For Oil Based Paint, Add	*0.06*	
		For Orange Peel Finish, Add	*0.13*	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.19*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.30*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.41*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.59*	
		For >100 To 250, Add	*0.28*	
		For >250 To 500, Add	*0.12*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.15*	
		For >20,000, Deduct	*-0.20*	
		For Epoxy Paint, Add	*0.12*	
09 91 13 00-0053	SF	1 Coat Paint, Brush Work, Paint Exterior Drywall/Plaster Walls	1.05	
		For Oil Based Paint, Add	*0.06*	
		For Orange Peel Finish, Add	*0.14*	
		For Work >15' To 20' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.34*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.47*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.67*	
		For >100 To 250, Add	*0.32*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.16*	
		For >20,000, Deduct	*-0.21*	
		For Epoxy Paint, Add	*0.11*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0054	SF	2 Coats Paint, Brush Work, Paint Exterior Drywall/Plaster Walls	1.94	
		For Oil Based Paint, Add	*0.12*	
		For Orange Peel Finish, Add	*0.27*	
		For Work >15' To 20' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.39*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.62*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.85*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.22*	
		For >100 To 250, Add	*0.58*	
		For >250 To 500, Add	*0.25*	
		For >2,500 To 5,000, Deduct	*-0.10*	
		For >5,000 To 10,000, Deduct	*-0.19*	
		For >10,000 To 20,000, Deduct	*-0.29*	
		For >20,000, Deduct	*-0.39*	
		For Epoxy Paint, Add	*0.22*	
09 91 13 00-0055	SF	1 Coat Primer, Brush/Roller Work, Paint Exterior Drywall/Plaster Walls	0.80	
		For Oil Based Paint, Add	*0.05*	
		For Orange Peel Finish, Add	*0.10*	
		For Work >15' To 20' Above Floor, Add	*0.08*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.30*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.45*	
		For >100 To 250, Add	*0.22*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.08*	
		For >10,000 To 20,000, Deduct	*-0.12*	
		For >20,000, Deduct	*-0.16*	
		For Epoxy Paint, Add	*0.12*	
09 91 13 00-0056	SF	1 Coat Paint, Brush/Roller Work, Paint Exterior Drywall/Plaster Walls	0.79	
		For Oil Based Paint, Add	*0.05*	
		For Orange Peel Finish, Add	*0.11*	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.47*	
		For >100 To 250, Add	*0.23*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.08*	
		For >10,000 To 20,000, Deduct	*-0.12*	
		For >20,000, Deduct	*-0.16*	
		For Epoxy Paint, Add	*0.10*	
09 91 13 00-0057	SF	2 Coats Paint, Brush/Roller Work, Paint Exterior Drywall/Plaster Walls	1.46	
		For Oil Based Paint, Add	*0.09*	
		For Orange Peel Finish, Add	*0.19*	
		For Work >15' To 20' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.27*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.58*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.86*	
		For >100 To 250, Add	*0.41*	
		For >250 To 500, Add	*0.18*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.15*	
		For >10,000 To 20,000, Deduct	*-0.22*	
		For >20,000, Deduct	*-0.29*	
		For Epoxy Paint, Add	*0.19*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0058	SF	1 Coat Primer, Sprayed, Paint Exterior Drywall/Plaster Walls	0.71	
		For Oil Based Paint, Add	*0.05*	
		For Work >15' To 20' Above Floor, Add	*0.06*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.35*	
		For >100 To 250, Add	*0.17*	
		For >250 To 500, Add	*0.08*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.07*	
		For >10,000 To 20,000, Deduct	*-0.11*	
		For >20,000, Deduct	*-0.14*	
		For Epoxy Paint, Add	*0.13*	
09 91 13 00-0059	SF	1 Coat Paint, Sprayed, Paint Exterior Drywall/Plaster Walls	0.74	
		For Oil Based Paint, Add	*0.05*	
		For Work >15' To 20' Above Floor, Add	*0.07*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.27*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.41*	
		For >100 To 250, Add	*0.20*	
		For >250 To 500, Add	*0.09*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.07*	
		For >10,000 To 20,000, Deduct	*-0.11*	
		For >20,000, Deduct	*-0.15*	
		For Epoxy Paint, Add	*0.11*	
09 91 13 00-0060	SF	2 Coats Paint, Sprayed, Paint Exterior Drywall/Plaster Walls	1.24	
		For Oil Based Paint, Add	*0.09*	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.19*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.30*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.41*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.63*	
		For >100 To 250, Add	*0.31*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.19*	
		For >20,000, Deduct	*-0.25*	
		For Epoxy Paint, Add	*0.21*	

09 91 13 00-0061 Paint Exterior Metal Walls *(09 91 13 00-0001)*

09 91 13 00-0062 Paint Exterior Galvanized Walls *(09 91 13 00-0061)*

Note: Linseed oil or acrylic latex paint.

09 91 13 00-0063	SF	1 Coat Primer, Brush Work, Paint Exterior Galvanized Wall Surfaces	1.23	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.46*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.68*	
		For >100 To 250, Add	*0.33*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.18*	
		For >20,000, Deduct	*-0.25*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0064	SF	1 Coat Paint, Brush Work, Paint Exterior Galvanized Wall Surfaces	1.35	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.38*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.52*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.77*	
		For >100 To 250, Add	*0.37*	
		For >250 To 500, Add	*0.16*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.14*	
		For >10,000 To 20,000, Deduct	*-0.20*	
		For >20,000, Deduct	*-0.27*	
09 91 13 00-0065	SF	2 Coats Paint, Brush Work, Paint Exterior Galvanized Wall Surfaces	2.48	
		For Work >15' To 20' Above Floor, Add	*0.25*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.67*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.92*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.37*	
		For >100 To 250, Add	*0.67*	
		For >250 To 500, Add	*0.29*	
		For >2,500 To 5,000, Deduct	*-0.12*	
		For >5,000 To 10,000, Deduct	*-0.25*	
		For >10,000 To 20,000, Deduct	*-0.37*	
		For >20,000, Deduct	*-0.50*	
09 91 13 00-0066	SF	1 Coat Primer, Brush/Roller Work, Paint Exterior Galvanized Walls	0.93	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.50*	
		For >100 To 250, Add	*0.24*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.14*	
		For >20,000, Deduct	*-0.19*	
09 91 13 00-0067	SF	1 Coat Paint, Brush/Roller Work, Paint Exterior Galvanized Walls	1.07	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.29*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.40*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.59*	
		For >100 To 250, Add	*0.29*	
		For >250 To 500, Add	*0.13*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.16*	
		For >20,000, Deduct	*-0.21*	
09 91 13 00-0068	SF	2 Coats Paint, Brush/Roller Work, Paint Exterior Galvanized Walls	2.00	
		For Work >15' To 20' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.52*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.72*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.09*	
		For >100 To 250, Add	*0.53*	
		For >250 To 500, Add	*0.23*	
		For >2,500 To 5,000, Deduct	*-0.10*	
		For >5,000 To 10,000, Deduct	*-0.20*	
		For >10,000 To 20,000, Deduct	*-0.30*	
		For >20,000, Deduct	*-0.40*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0069	SF	1 Coat Primer, Sprayed, Paint Exterior Galvanized Walls	0.82	
		For Work >15' To 20' Above Floor, Add	*0.05*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.34*	
		For >100 To 250, Add	*0.17*	
		For >250 To 500, Add	*0.08*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.08*	
		For >10,000 To 20,000, Deduct	*-0.12*	
		For >20,000, Deduct	*-0.16*	
09 91 13 00-0070	SF	1 Coat Paint, Sprayed, Paint Exterior Galvanized Walls	1.05	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.51*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.16*	
		For >20,000, Deduct	*-0.21*	
09 91 13 00-0071	SF	2 Coats Paint, Sprayed, Paint Exterior Galvanized Walls	1.79	
		For Work >15' To 20' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.35*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.48*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.79*	
		For >100 To 250, Add	*0.40*	
		For >250 To 500, Add	*0.18*	
		For >2,500 To 5,000, Deduct	*-0.09*	
		For >5,000 To 10,000, Deduct	*-0.18*	
		For >10,000 To 20,000, Deduct	*-0.27*	
		For >20,000, Deduct	*-0.36*	

09 91 13 00-0072 Paint Exterior Aluminum And Aluminum Alloy Walls *(09 91 13 00-0061)*

Note: Alkyd enamel paint.

09 91 13 00-0073	SF	1 Coat Primer, Brush Work, Paint Exterior Aluminum And Aluminum Alloy Wall Surfaces	1.23	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.46*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.68*	
		For >100 To 250, Add	*0.33*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.18*	
		For >20,000, Deduct	*-0.25*	
09 91 13 00-0074	SF	1 Coat Paint, Brush Work, Paint Exterior Aluminum And Aluminum Alloy Wall Surfaces	1.35	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.38*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.52*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.77*	
		For >100 To 250, Add	*0.37*	
		For >250 To 500, Add	*0.16*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.14*	
		For >10,000 To 20,000, Deduct	*-0.20*	
		For >20,000, Deduct	*-0.27*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0075	SF	2 Coats Paint, Brush Work, Paint Exterior Aluminum And Aluminum Alloy Wall Surfaces	2.47	
		For Work >15' To 20' Above Floor, Add	*0.25*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.67*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.92*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.37*	
		For >100 To 250, Add	*0.66*	
		For >250 To 500, Add	*0.29*	
		For >2,500 To 5,000, Deduct	*-0.12*	
		For >5,000 To 10,000, Deduct	*-0.25*	
		For >10,000 To 20,000, Deduct	*-0.37*	
		For >20,000, Deduct	*-0.49*	
09 91 13 00-0076	SF	1 Coat Primer, Brush/Roller Work, Paint Exterior Aluminum And Aluminum Alloy Walls	1.06	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.52*	
		For >100 To 250, Add	*0.26*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.16*	
		For >20,000, Deduct	*-0.21*	
09 91 13 00-0077	SF	1 Coat Paint, Brush/Roller Work, Paint Exterior Aluminum And Aluminum Alloy Walls	1.18	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.29*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.40*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.61*	
		For >100 To 250, Add	*0.30*	
		For >250 To 500, Add	*0.13*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.18*	
		For >20,000, Deduct	*-0.24*	
09 91 13 00-0078	SF	2 Coats Paint, Brush/Roller Work, Paint Exterior Aluminum And Aluminum Alloy Walls	2.23	
		For Work >15' To 20' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.52*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.72*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.12*	
		For >100 To 250, Add	*0.55*	
		For >250 To 500, Add	*0.24*	
		For >2,500 To 5,000, Deduct	*-0.11*	
		For >5,000 To 10,000, Deduct	*-0.22*	
		For >10,000 To 20,000, Deduct	*-0.33*	
		For >20,000, Deduct	*-0.45*	
09 91 13 00-0079	SF	1 Coat Primer, Sprayed, Paint Exterior Aluminum And Aluminum Alloy Walls	0.89	
		For Work >15' To 20' Above Floor, Add	*0.06*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.39*	
		For >100 To 250, Add	*0.20*	
		For >250 To 500, Add	*0.09*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.18*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0080	SF	1 Coat Paint, Sprayed, Paint Exterior Aluminum And Aluminum Alloy Walls	1.05	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.51*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.16*	
		For >20,000, Deduct	*-0.21*	
09 91 13 00-0081	SF	2 Coats Paint, Sprayed, Paint Exterior Aluminum And Aluminum Alloy Walls	1.79	
		For Work >15' To 20' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.35*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.48*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.79*	
		For >100 To 250, Add	*0.40*	
		For >250 To 500, Add	*0.18*	
		For >2,500 To 5,000, Deduct	*-0.09*	
		For >5,000 To 10,000, Deduct	*-0.18*	
		For >10,000 To 20,000, Deduct	*-0.27*	
		For >20,000, Deduct	*-0.36*	

09 91 13 00-0082 Paint Exterior Aluminum And Aluminum Alloy Roof Stacks *(09 91 13 00-0061)*

09 91 13 00-0083	LF	1 Coat Primer, Paint Exterior Aluminum And Aluminum Alloy Roof Stack With Heat Resistant Paint, Per LF Of Stack	15.37	
		For Work >15' To 20' Above Floor, Add	*1.96*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*3.27*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*5.22*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*7.18*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*10.14*	
		For >100 To 250, Add	*4.80*	
		For >250 To 500, Add	*2.07*	
		For >2,500 To 5,000, Deduct	*-0.77*	
		For >5,000 To 10,000, Deduct	*-1.54*	
		For >10,000 To 20,000, Deduct	*-2.31*	
		For >20,000, Deduct	*-3.07*	
09 91 13 00-0084	LF	1 Coat Paint, Paint Exterior Aluminum And Aluminum Alloy Roof Stack With Heat Resistant Paint, Per LF Of Stack	17.10	
		For Work >15' To 20' Above Floor, Add	*2.18*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*3.63*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*5.80*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*7.98*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*11.27*	
		For >100 To 250, Add	*5.34*	
		For >250 To 500, Add	*2.31*	
		For >2,500 To 5,000, Deduct	*-0.86*	
		For >5,000 To 10,000, Deduct	*-1.71*	
		For >10,000 To 20,000, Deduct	*-2.57*	
		For >20,000, Deduct	*-3.42*	
09 91 13 00-0085	LF	2 Coats Paint, Paint Exterior Aluminum And Aluminum Alloy Roof Stack With Heat Resistant Paint, Per LF Of Stack	31.89	
		For Work >15' To 20' Above Floor, Add	*4.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*6.82*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*10.91*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*15.00*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*21.15*	
		For >100 To 250, Add	*10.01*	
		For >250 To 500, Add	*4.32*	
		For >2,500 To 5,000, Deduct	*-1.59*	
		For >5,000 To 10,000, Deduct	*-3.19*	
		For >10,000 To 20,000, Deduct	*-4.78*	
		For >20,000, Deduct	*-6.38*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

09 91 13 00-0086 Paint Exterior Corrugated Metal Walls *(09 91 13 00-0061)*

09 91 13 00-0087	SF	1 Coat Primer, Sprayed, Paint Exterior Corrugated Metal Walls	1.01	
		For Work >15' To 20' Above Floor, Add	*0.07*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.19*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.44*	
		For >100 To 250, Add	*0.22*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.15*	
		For >20,000, Deduct	*-0.20*	
09 91 13 00-0088	SF	1 Coat Paint, Sprayed, Paint Exterior Corrugated Metal Walls	1.30	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.19*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.31*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.66*	
		For >100 To 250, Add	*0.32*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.20*	
		For >20,000, Deduct	*-0.26*	
09 91 13 00-0089	SF	2 Coats Paint, Sprayed, Paint Exterior Corrugated Metal Walls	2.22	
		For Work >15' To 20' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.29*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.46*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.64*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.03*	
		For >100 To 250, Add	*0.51*	
		For >250 To 500, Add	*0.23*	
		For >2,500 To 5,000, Deduct	*-0.11*	
		For >5,000 To 10,000, Deduct	*-0.22*	
		For >10,000 To 20,000, Deduct	*-0.33*	
		For >20,000, Deduct	*-0.44*	

09 91 13 00-0090 Paint Exterior Stucco Walls *(09 91 13 00-0001)*

09 91 13 00-0091	LF	1 Coat Paint, Cut-in Brush Work, Paint Exterior Stucco Wall Surfaces	0.30	
		For Oil Based Paint, Add	*0.02*	
		For Work >15' To 20' Above Floor, Add	*0.04*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.06*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.19*	
		For >100 To 250, Add	*0.09*	
		For >250 To 500, Add	*0.04*	
		For >2,500 To 5,000, Deduct	*-0.02*	
		For >5,000 To 10,000, Deduct	*-0.03*	
		For >10,000 To 20,000, Deduct	*-0.05*	
		For >20,000, Deduct	*-0.06*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0092	SF	1 Coat Primer, Brush Work, Paint Exterior Stucco Wall Surfaces	1.61	
		For Oil Based Paint, Add	*0.10*	
		For Work >15' To 20' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.52*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.72*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.03*	
		For >100 To 250, Add	*0.49*	
		For >250 To 500, Add	*0.21*	
		For >2,500 To 5,000, Deduct	*-0.08*	
		For >5,000 To 10,000, Deduct	*-0.16*	
		For >10,000 To 20,000, Deduct	*-0.24*	
		For >20,000, Deduct	*-0.32*	
09 91 13 00-0093	SF	1 Coat Paint, Brush Work, Paint Exterior Stucco Wall Surfaces	1.78	
		For Oil Based Paint, Add	*0.11*	
		For Work >15' To 20' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.57*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.79*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.13*	
		For >100 To 250, Add	*0.54*	
		For >250 To 500, Add	*0.23*	
		For >2,500 To 5,000, Deduct	*-0.09*	
		For >5,000 To 10,000, Deduct	*-0.18*	
		For >10,000 To 20,000, Deduct	*-0.27*	
		For >20,000, Deduct	*-0.36*	
09 91 13 00-0094	SF	2 Coats Paint, Brush Work, Paint Exterior Stucco Wall Surfaces	3.31	
		For Oil Based Paint, Add	*0.20*	
		For Work >15' To 20' Above Floor, Add	*0.39*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.65*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*1.04*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.44*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*2.06*	
		For >100 To 250, Add	*0.98*	
		For >250 To 500, Add	*0.43*	
		For >2,500 To 5,000, Deduct	*-0.17*	
		For >5,000 To 10,000, Deduct	*-0.33*	
		For >10,000 To 20,000, Deduct	*-0.50*	
		For >20,000, Deduct	*-0.66*	
09 91 13 00-0095	SF	1 Coat Primer, Brush/Roller Work, Paint Exterior Stucco Walls	1.24	
		For Oil Based Paint, Add	*0.08*	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.38*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.52*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.75*	
		For >100 To 250, Add	*0.36*	
		For >250 To 500, Add	*0.16*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.19*	
		For >20,000, Deduct	*-0.25*	
09 91 13 00-0096	SF	1 Coat Paint, Brush/Roller Work, Paint Exterior Stucco Walls	1.41	
		For Oil Based Paint, Add	*0.09*	
		For Work >15' To 20' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.27*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.58*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.85*	
		For >100 To 250, Add	*0.41*	
		For >250 To 500, Add	*0.18*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.14*	
		For >10,000 To 20,000, Deduct	*-0.21*	
		For >20,000, Deduct	*-0.28*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0097	SF	2 Coats Paint, Brush/Roller Work, Paint Exterior Stucco Walls	2.62	
		For Oil Based Paint, Add	*0.17*	
		For Work >15' To 20' Above Floor, Add	*0.29*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.48*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.77*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.06*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.55*	
		For >100 To 250, Add	*0.74*	
		For >250 To 500, Add	*0.32*	
		For >2,500 To 5,000, Deduct	*-0.13*	
		For >5,000 To 10,000, Deduct	*-0.26*	
		For >10,000 To 20,000, Deduct	*-0.39*	
		For >20,000, Deduct	*-0.52*	
09 91 13 00-0098	SF	1 Coat Primer, Sprayed, Paint Exterior Stucco Walls	0.97	
		For Oil Based Paint, Add	*0.07*	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.25*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.34*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.52*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.15*	
		For >20,000, Deduct	*-0.19*	
09 91 13 00-0099	SF	1 Coat Paint, Sprayed, Paint Exterior Stucco Walls	1.18	
		For Oil Based Paint, Add	*0.08*	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.29*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.40*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.62*	
		For >100 To 250, Add	*0.30*	
		For >250 To 500, Add	*0.13*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.18*	
		For >20,000, Deduct	*-0.24*	
09 91 13 00-0100	SF	2 Coats Paint, Sprayed, Paint Exterior Stucco Walls	2.26	
		For Oil Based Paint, Add	*0.15*	
		For Work >15' To 20' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.37*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.58*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.80*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.22*	
		For >100 To 250, Add	*0.59*	
		For >250 To 500, Add	*0.26*	
		For >2,500 To 5,000, Deduct	*-0.11*	
		For >5,000 To 10,000, Deduct	*-0.23*	
		For >10,000 To 20,000, Deduct	*-0.34*	
		For >20,000, Deduct	*-0.45*	

09 91 13 00-0101 Paint Exterior Wood Siding *(09 91 13 00-0001)*

09 91 13 00-0102 Paint Exterior Smooth Wood Siding *(09 91 13 00-0101)*
Note: Includes tongue and groove, beveled, drop or board and batten siding.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0103	LF	1 Coat Paint, Cut-in Brush Work, Paint Exterior Wood Smooth Siding	0.24	
		For Oil Based Paint, Add	*0.01*	
		For Work >15' To 20' Above Floor, Add	*0.03*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.05*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.08*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.15*	
		For >100 To 250, Add	*0.07*	
		For >250 To 500, Add	*0.03*	
		For >2,500 To 5,000, Deduct	*-0.01*	
		For >5,000 To 10,000, Deduct	*-0.02*	
		For >10,000 To 20,000, Deduct	*-0.04*	
		For >20,000, Deduct	*-0.05*	
09 91 13 00-0104	SF	1 Coat Primer, Brush Work, Paint Exterior Wood Smooth Siding	1.39	
		For Oil Based Paint, Add	*0.09*	
		For Work >15' To 20' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.57*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.83*	
		For >100 To 250, Add	*0.40*	
		For >250 To 500, Add	*0.17*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.14*	
		For >10,000 To 20,000, Deduct	*-0.21*	
		For >20,000, Deduct	*-0.28*	
09 91 13 00-0105	SF	1 Coat Paint, Brush Work, Paint Exterior Wood Smooth Siding	1.45	
		For Oil Based Paint, Add	*0.09*	
		For Work >15' To 20' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.29*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.46*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.63*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.91*	
		For >100 To 250, Add	*0.43*	
		For >250 To 500, Add	*0.19*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.15*	
		For >10,000 To 20,000, Deduct	*-0.22*	
		For >20,000, Deduct	*-0.29*	
09 91 13 00-0106	SF	2 Coats Paint, Brush Work, Paint Exterior Wood Smooth Siding	2.61	
		For Oil Based Paint, Add	*0.16*	
		For Work >15' To 20' Above Floor, Add	*0.30*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.50*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.80*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.11*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.60*	
		For >100 To 250, Add	*0.76*	
		For >250 To 500, Add	*0.33*	
		For >2,500 To 5,000, Deduct	*-0.13*	
		For >5,000 To 10,000, Deduct	*-0.26*	
		For >10,000 To 20,000, Deduct	*-0.39*	
		For >20,000, Deduct	*-0.52*	
09 91 13 00-0107	SF	1 Coat Primer, Brush/Roller Work, Paint Exterior Smooth Wood Siding	1.12	
		For Oil Based Paint, Add	*0.08*	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.29*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.40*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.60*	
		For >100 To 250, Add	*0.29*	
		For >250 To 500, Add	*0.13*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.22*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0108	SF	1 Coat Paint, Brush/Roller Work, Paint Exterior Smooth Wood Siding	1.21	
		For Oil Based Paint, Add	*0.08*	
		For Work >15' To 20' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.34*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.47*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.70*	
		For >100 To 250, Add	*0.34*	
		For >250 To 500, Add	*0.15*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.18*	
		For >20,000, Deduct	*-0.24*	
09 91 13 00-0109	SF	2 Coats Paint, Brush/Roller Work, Paint Exterior Smooth Wood Siding	2.28	
		For Oil Based Paint, Add	*0.15*	
		For Work >15' To 20' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.40*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.63*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.87*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.29*	
		For >100 To 250, Add	*0.62*	
		For >250 To 500, Add	*0.27*	
		For >2,500 To 5,000, Deduct	*-0.11*	
		For >5,000 To 10,000, Deduct	*-0.23*	
		For >10,000 To 20,000, Deduct	*-0.34*	
		For >20,000, Deduct	*-0.46*	
09 91 13 00-0110	SF	1 Coat Primer, Sprayed, Paint Exterior Smooth Wood Siding	0.93	
		For Oil Based Paint, Add	*0.07*	
		For Work >15' To 20' Above Floor, Add	*0.08*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.29*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.46*	
		For >100 To 250, Add	*0.23*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.14*	
		For >20,000, Deduct	*-0.19*	
09 91 13 00-0111	SF	1 Coat Paint, Sprayed, Paint Exterior Smooth Wood Siding	1.10	
		For Oil Based Paint, Add	*0.08*	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.28*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.39*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.59*	
		For >100 To 250, Add	*0.29*	
		For >250 To 500, Add	*0.13*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.22*	
09 91 13 00-0112	SF	2 Coats Paint, Sprayed, Paint Exterior Smooth Wood Siding	1.79	
		For Oil Based Paint, Add	*0.13*	
		For Work >15' To 20' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.57*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.89*	
		For >100 To 250, Add	*0.44*	
		For >250 To 500, Add	*0.19*	
		For >2,500 To 5,000, Deduct	*-0.09*	
		For >5,000 To 10,000, Deduct	*-0.18*	
		For >10,000 To 20,000, Deduct	*-0.27*	
		For >20,000, Deduct	*-0.36*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0113		Paint Exterior Rough Wood Siding *(09 91 13 00-0101)*		
		Note: Includes shingles, shakes or rough sawn siding.		
09 91 13 00-0114	SF	1 Coat Primer, Brush Work, Paint Exterior Wood Rough (Shingles, Shakes Or Rough Sawn) Siding	1.84	
		For Oil Based Paint, Add	*0.11*	
		For Work >15' To 20' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.58*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.79*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.14*	
		For >100 To 250, Add	*0.54*	
		For >250 To 500, Add	*0.24*	
		For >2,500 To 5,000, Deduct	*-0.09*	
		For >5,000 To 10,000, Deduct	*-0.18*	
		For >10,000 To 20,000, Deduct	*-0.28*	
		For >20,000, Deduct	*-0.37*	
09 91 13 00-0115	SF	1 Coat Paint, Brush Work, Paint Exterior Wood Rough (Shingles, Shakes Or Rough Sawn) Siding	1.81	
		For Oil Based Paint, Add	*0.11*	
		For Work >15' To 20' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.38*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.60*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.83*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.18*	
		For >100 To 250, Add	*0.56*	
		For >250 To 500, Add	*0.24*	
		For >2,500 To 5,000, Deduct	*-0.09*	
		For >5,000 To 10,000, Deduct	*-0.18*	
		For >10,000 To 20,000, Deduct	*-0.27*	
		For >20,000, Deduct	*-0.36*	
09 91 13 00-0116	SF	2 Coats Paint, Brush Work, Paint Exterior Wood Rough (Shingles, Shakes Or Rough Sawn) Siding	3.35	
		For Oil Based Paint, Add	*0.20*	
		For Work >15' To 20' Above Floor, Add	*0.41*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.69*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*1.10*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.51*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*2.15*	
		For >100 To 250, Add	*1.02*	
		For >250 To 500, Add	*0.44*	
		For >2,500 To 5,000, Deduct	*-0.17*	
		For >5,000 To 10,000, Deduct	*-0.34*	
		For >10,000 To 20,000, Deduct	*-0.50*	
		For >20,000, Deduct	*-0.67*	
09 91 13 00-0117	SF	1 Coat Primer, Brush/Roller Work, Paint Exterior Shingles, Shakes Or Rough Sawn Wood Siding	1.72	
		For Oil Based Paint, Add	*0.12*	
		For Work >15' To 20' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.27*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.43*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.59*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.90*	
		For >100 To 250, Add	*0.44*	
		For >250 To 500, Add	*0.19*	
		For >2,500 To 5,000, Deduct	*-0.09*	
		For >5,000 To 10,000, Deduct	*-0.17*	
		For >10,000 To 20,000, Deduct	*-0.26*	
		For >20,000, Deduct	*-0.34*	
09 91 13 00-0118	SF	1 Coat Paint, Brush/Roller Work, Paint Exterior Shingles, Shakes Or Rough Sawn Wood Siding	1.84	
		For Oil Based Paint, Add	*0.12*	
		For Work >15' To 20' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.30*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.48*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.65*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.99*	
		For >100 To 250, Add	*0.48*	
		For >250 To 500, Add	*0.21*	
		For >2,500 To 5,000, Deduct	*-0.09*	
		For >5,000 To 10,000, Deduct	*-0.18*	
		For >10,000 To 20,000, Deduct	*-0.28*	
		For >20,000, Deduct	*-0.37*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0119	SF	2 Coats Paint, Brush/Roller Work, Paint Exterior Shingles, Shakes Or Rough Sawn Wood Siding	3.44	
		For Oil Based Paint, Add	*0.24*	
		For Work >15' To 20' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.54*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.86*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.18*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.80*	
		For >100 To 250, Add	*0.88*	
		For >250 To 500, Add	*0.39*	
		For >2,500 To 5,000, Deduct	*-0.17*	
		For >5,000 To 10,000, Deduct	*-0.34*	
		For >10,000 To 20,000, Deduct	*-0.52*	
		For >20,000, Deduct	*-0.69*	
09 91 13 00-0120	SF	1 Coat Primer, Sprayed, Paint Exterior Shingles, Shakes Or Rough Sawn Wood Siding	1.28	
		For Oil Based Paint, Add	*0.09*	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.29*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.40*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.63*	
		For >100 To 250, Add	*0.31*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.19*	
		For >20,000, Deduct	*-0.26*	
09 91 13 00-0121	SF	1 Coat Paint, Sprayed, Paint Exterior Shingles, Shakes Or Rough Sawn Wood Siding	1.43	
		For Oil Based Paint, Add	*0.10*	
		For Work >15' To 20' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.35*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.48*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.74*	
		For >100 To 250, Add	*0.36*	
		For >250 To 500, Add	*0.16*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.14*	
		For >10,000 To 20,000, Deduct	*-0.21*	
		For >20,000, Deduct	*-0.29*	
09 91 13 00-0122	SF	2 Coats Paint, Sprayed, Paint Exterior Shingles, Shakes Or Rough Sawn Wood Siding	2.70	
		For Oil Based Paint, Add	*0.19*	
		For Work >15' To 20' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.40*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.64*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.88*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.37*	
		For >100 To 250, Add	*0.67*	
		For >250 To 500, Add	*0.30*	
		For >2,500 To 5,000, Deduct	*-0.14*	
		For >5,000 To 10,000, Deduct	*-0.27*	
		For >10,000 To 20,000, Deduct	*-0.41*	
		For >20,000, Deduct	*-0.54*	

09 91 13 00-0123 Paint Exterior Vinyl Siding *(09 91 13 00-0001)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0124	LF	1 Coat Paint, Cut-in Brush Work, Paint Exterior Vinyl Siding	0.19	
		For Oil Based Paint, Add	*0.01*	
		For Work >15' To 20' Above Floor, Add	*0.02*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.03*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.05*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.07*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.11*	
		For >100 To 250, Add	*0.05*	
		For >250 To 500, Add	*0.02*	
		For >2,500 To 5,000, Deduct	*-0.01*	
		For >5,000 To 10,000, Deduct	*-0.02*	
		For >10,000 To 20,000, Deduct	*-0.03*	
		For >20,000, Deduct	*-0.04*	
09 91 13 00-0125	SF	1 Coat Primer, Brush Work, Paint Exterior Vinyl Siding	1.06	
		For Oil Based Paint, Add	*0.07*	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.28*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.39*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.59*	
		For >100 To 250, Add	*0.28*	
		For >250 To 500, Add	*0.12*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.16*	
		For >20,000, Deduct	*-0.21*	
09 91 13 00-0126	SF	1 Coat Paint, Brush Work, Paint Exterior Vinyl Siding	1.16	
		For Oil Based Paint, Add	*0.08*	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.45*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.66*	
		For >100 To 250, Add	*0.32*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.23*	
09 91 13 00-0127	SF	2 Coats Paint, Brush Work, Paint Exterior Vinyl Siding	2.18	
		For Oil Based Paint, Add	*0.15*	
		For Work >15' To 20' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.57*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.79*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.19*	
		For >100 To 250, Add	*0.58*	
		For >250 To 500, Add	*0.25*	
		For >2,500 To 5,000, Deduct	*-0.11*	
		For >5,000 To 10,000, Deduct	*-0.22*	
		For >10,000 To 20,000, Deduct	*-0.33*	
		For >20,000, Deduct	*-0.44*	
09 91 13 00-0128	SF	1 Coat Primer, Brush/Roller Work, Paint Exterior Vinyl Siding	1.00	
		For Oil Based Paint, Add	*0.07*	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.51*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.15*	
		For >20,000, Deduct	*-0.20*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0129	SF	1 Coat Paint, Brush/Roller Work, Paint Exterior Vinyl Siding	1.00	
		For Oil Based Paint, Add	*0.07*	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.51*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.15*	
		For >20,000, Deduct	*-0.20*	
09 91 13 00-0130	SF	2 Coats Paint, Brush/Roller Work, Paint Exterior Vinyl Siding	1.87	
		For Oil Based Paint, Add	*0.13*	
		For Work >15' To 20' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.27*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.43*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.59*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.92*	
		For >100 To 250, Add	*0.45*	
		For >250 To 500, Add	*0.20*	
		For >2,500 To 5,000, Deduct	*-0.09*	
		For >5,000 To 10,000, Deduct	*-0.19*	
		For >10,000 To 20,000, Deduct	*-0.28*	
		For >20,000, Deduct	*-0.37*	
09 91 13 00-0131	SF	1 Coat Primer, Sprayed, Paint Exterior Vinyl Siding	0.93	
		For Oil Based Paint, Add	*0.07*	
		For Work >15' To 20' Above Floor, Add	*0.06*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.40*	
		For >100 To 250, Add	*0.20*	
		For >250 To 500, Add	*0.09*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.14*	
		For >20,000, Deduct	*-0.19*	
09 91 13 00-0132	SF	1 Coat Paint, Sprayed, Paint Exterior Vinyl Siding	1.08	
		For Oil Based Paint, Add	*0.09*	
		For Work >15' To 20' Above Floor, Add	*0.06*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.42*	
		For >100 To 250, Add	*0.22*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.16*	
		For >20,000, Deduct	*-0.22*	
09 91 13 00-0133	SF	2 Coats Paint, Sprayed, Paint Exterior Vinyl Siding	2.13	
		For Oil Based Paint, Add	*0.17*	
		For Work >15' To 20' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.35*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.48*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.85*	
		For >100 To 250, Add	*0.43*	
		For >250 To 500, Add	*0.19*	
		For >2,500 To 5,000, Deduct	*-0.11*	
		For >5,000 To 10,000, Deduct	*-0.21*	
		For >10,000 To 20,000, Deduct	*-0.32*	
		For >20,000, Deduct	*-0.43*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0134		Paint Exterior Ceilings *(09 91 13)*		
09 91 13 00-0135		Paint Exterior Concrete Ceilings *(09 91 13 00-0134)*		
09 91 13 00-0136	LF	1 Coat Paint, Cut-in Brush Work, Paint Exterior Concrete Ceiling	0.19	
		For Oil Based Paint, Add	*0.01*	
		For Epoxy Paint, Add	*0.02*	
		For Work >15' To 20' Above Floor, Add	*0.02*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.04*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.06*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.12*	
		For >100 To 250, Add	*0.06*	
		For >250 To 500, Add	*0.03*	
		For >2,500 To 5,000, Deduct	*-0.01*	
		For >5,000 To 10,000, Deduct	*-0.02*	
		For >10,000 To 20,000, Deduct	*-0.03*	
		For >20,000, Deduct	*-0.04*	
09 91 13 00-0137	SF	1 Coat Filler, Brush Work, Paint Exterior Concrete Ceiling	1.08	
		For Oil Based Paint, Add	*0.07*	
		For Epoxy Paint, Add	*0.13*	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.46*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.66*	
		For >100 To 250, Add	*0.32*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.16*	
		For >20,000, Deduct	*-0.22*	
09 91 13 00-0138	SF	1 Coat Paint, Brush Work, Paint Exterior Concrete Ceiling	1.15	
		For Oil Based Paint, Add	*0.07*	
		For Epoxy Paint, Add	*0.12*	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.38*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.52*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.74*	
		For >100 To 250, Add	*0.35*	
		For >250 To 500, Add	*0.15*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.23*	
09 91 13 00-0139	SF	2 Coats Paint, Brush Work, Paint Exterior Concrete Ceiling	2.06	
		For Oil Based Paint, Add	*0.12*	
		For Epoxy Paint, Add	*0.22*	
		For Work >15' To 20' Above Floor, Add	*0.25*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.66*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.91*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.31*	
		For >100 To 250, Add	*0.62*	
		For >250 To 500, Add	*0.27*	
		For >2,500 To 5,000, Deduct	*-0.10*	
		For >5,000 To 10,000, Deduct	*-0.21*	
		For >10,000 To 20,000, Deduct	*-0.31*	
		For >20,000, Deduct	*-0.41*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0140	SF	1 Coat Filler, Brush/Roller Work, Paint Exterior Concrete Ceiling	0.85	
		For Oil Based Paint, Add	*0.06*	
		For Epoxy Paint, Add	*0.12*	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.49*	
		For >100 To 250, Add	*0.24*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.17*	
09 91 13 00-0141	SF	1 Coat Paint, Brush/Roller Work, Paint Exterior Concrete Ceiling	0.91	
		For Oil Based Paint, Add	*0.06*	
		For Epoxy Paint, Add	*0.11*	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.28*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.39*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.56*	
		For >100 To 250, Add	*0.27*	
		For >250 To 500, Add	*0.12*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.14*	
		For >20,000, Deduct	*-0.18*	
09 91 13 00-0142	SF	2 Coats Paint, Brush/Roller Work, Paint Exterior Concrete Ceiling	1.72	
		For Oil Based Paint, Add	*0.11*	
		For Epoxy Paint, Add	*0.21*	
		For Work >15' To 20' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.53*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.73*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.05*	
		For >100 To 250, Add	*0.50*	
		For >250 To 500, Add	*0.22*	
		For >2,500 To 5,000, Deduct	*-0.09*	
		For >5,000 To 10,000, Deduct	*-0.17*	
		For >10,000 To 20,000, Deduct	*-0.26*	
		For >20,000, Deduct	*-0.34*	
09 91 13 00-0143	SF	1 Coat Filler, Sprayed, Paint Exterior Concrete Ceiling	0.73	
		For Oil Based Paint, Add	*0.05*	
		For Epoxy Paint, Add	*0.13*	
		For Work >15' To 20' Above Floor, Add	*0.06*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.37*	
		For >100 To 250, Add	*0.18*	
		For >250 To 500, Add	*0.08*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.07*	
		For >10,000 To 20,000, Deduct	*-0.11*	
		For >20,000, Deduct	*-0.15*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0144	SF	1 Coat Paint, Sprayed, Paint Exterior Concrete Ceiling	0.84	
		For Oil Based Paint, Add	*0.05*	
		For Epoxy Paint, Add	*0.12*	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.48*	
		For >100 To 250, Add	*0.23*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.08*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.17*	
09 91 13 00-0145	SF	2 Coats Paint, Sprayed, Paint Exterior Concrete Ceiling	1.37	
		For Oil Based Paint, Add	*0.09*	
		For Epoxy Paint, Add	*0.22*	
		For Work >15' To 20' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.35*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.48*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.73*	
		For >100 To 250, Add	*0.35*	
		For >250 To 500, Add	*0.16*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.14*	
		For >10,000 To 20,000, Deduct	*-0.21*	
		For >20,000, Deduct	*-0.27*	

09 91 13 00-0146 Drywall/Plaster *(09 91 13 00-0134)*

09 91 13 00-0147	LF	1 Coat Paint, Cut-in Brush Work, Paint Exterior Drywall/Plaster Ceiling	0.19	
		For Oil Based Paint, Add	*0.01*	
		For Epoxy Paint, Add	*0.02*	
		For Work >15' To 20' Above Floor, Add	*0.02*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.04*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.06*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.12*	
		For >100 To 250, Add	*0.06*	
		For >250 To 500, Add	*0.03*	
		For >2,500 To 5,000, Deduct	*-0.01*	
		For >5,000 To 10,000, Deduct	*-0.02*	
		For >10,000 To 20,000, Deduct	*-0.03*	
		For >20,000, Deduct	*-0.04*	
		For Epoxy Paint, Add	*0.02*	
09 91 13 00-0148	SF	1 Coat Primer, Brush Work, Paint Exterior Drywall/Plaster Ceiling	1.09	
		For Oil Based Paint, Add	*0.07*	
		For Orange Peel Finish, Add	*0.15*	
		For Epoxy Paint, Add	*0.13*	
		For Work >15' To 20' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.34*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.46*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.67*	
		For >100 To 250, Add	*0.32*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.16*	
		For >20,000, Deduct	*-0.22*	
		For Epoxy Paint, Add	*0.13*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0149	SF	1 Coat Paint, Brush Work, Paint Exterior Drywall/Plaster Ceiling	1.15	
		For Oil Based Paint, Add	*0.07*	
		For Orange Peel Finish, Add	*0.16*	
		For Epoxy Paint, Add	*0.12*	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.38*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.52*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.74*	
		For >100 To 250, Add	*0.35*	
		For >250 To 500, Add	*0.15*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.23*	
		For Epoxy Paint, Add	*0.12*	
09 91 13 00-0150	SF	2 Coats Paint, Brush Work, Paint Exterior Drywall/Plaster Ceiling	2.07	
		For Oil Based Paint, Add	*0.12*	
		For Orange Peel Finish, Add	*0.28*	
		For Epoxy Paint, Add	*0.22*	
		For Work >15' To 20' Above Floor, Add	*0.25*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.67*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.92*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.31*	
		For >100 To 250, Add	*0.62*	
		For >250 To 500, Add	*0.27*	
		For >2,500 To 5,000, Deduct	*-0.10*	
		For >5,000 To 10,000, Deduct	*-0.21*	
		For >10,000 To 20,000, Deduct	*-0.31*	
		For >20,000, Deduct	*-0.41*	
		For Epoxy Paint, Add	*0.22*	
09 91 13 00-0151	SF	1 Coat Primer, Brush/Roller Work, Paint Exterior Drywall/Plaster Ceiling	0.83	
		For Oil Based Paint, Add	*0.05*	
		For Orange Peel Finish, Add	*0.11*	
		For Epoxy Paint, Add	*0.12*	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.47*	
		For >100 To 250, Add	*0.23*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.08*	
		For >10,000 To 20,000, Deduct	*-0.12*	
		For >20,000, Deduct	*-0.17*	
		For Epoxy Paint, Add	*0.12*	
09 91 13 00-0152	SF	1 Coat Paint, Brush/Roller Work, Paint Exterior Drywall/Plaster Ceiling	0.91	
		For Oil Based Paint, Add	*0.06*	
		For Orange Peel Finish, Add	*0.12*	
		For Epoxy Paint, Add	*0.11*	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.28*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.39*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.56*	
		For >100 To 250, Add	*0.27*	
		For >250 To 500, Add	*0.12*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.14*	
		For >20,000, Deduct	*-0.18*	
		For Epoxy Paint, Add	*0.11*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0153	SF	2 Coats Paint, Brush/Roller Work, Paint Exterior Drywall/Plaster Ceiling	1.71	
		For Oil Based Paint, Add	*0.11*	
		For Orange Peel Finish, Add	*0.23*	
		For Epoxy Paint, Add	*0.21*	
		For Work >15' To 20' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.52*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.72*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.04*	
		For >100 To 250, Add	*0.50*	
		For >250 To 500, Add	*0.22*	
		For >2,500 To 5,000, Deduct	*-0.09*	
		For >5,000 To 10,000, Deduct	*-0.17*	
		For >10,000 To 20,000, Deduct	*-0.26*	
		For >20,000, Deduct	*-0.34*	
		For Epoxy Paint, Add	*0.21*	
09 91 13 00-0154	SF	1 Coat Primer, Sprayed, Paint Exterior Drywall/Plaster Ceiling	0.73	
		For Oil Based Paint, Add	*0.05*	
		For Epoxy Paint, Add	*0.13*	
		For Work >15' To 20' Above Floor, Add	*0.06*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.37*	
		For >100 To 250, Add	*0.18*	
		For >250 To 500, Add	*0.08*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.07*	
		For >10,000 To 20,000, Deduct	*-0.11*	
		For >20,000, Deduct	*-0.15*	
		For Epoxy Paint, Add	*0.13*	
09 91 13 00-0155	SF	1 Coat Paint, Sprayed, Paint Exterior Drywall/Plaster Ceiling	0.84	
		For Oil Based Paint, Add	*0.05*	
		For Epoxy Paint, Add	*0.12*	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.48*	
		For >100 To 250, Add	*0.23*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.08*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.17*	
		For Epoxy Paint, Add	*0.12*	
09 91 13 00-0156	SF	2 Coats Paint, Sprayed, Paint Exterior Drywall/Plaster Ceiling	1.38	
		For Oil Based Paint, Add	*0.09*	
		For Epoxy Paint, Add	*0.22*	
		For Work >15' To 20' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.35*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.48*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.74*	
		For >100 To 250, Add	*0.36*	
		For >250 To 500, Add	*0.16*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.14*	
		For >10,000 To 20,000, Deduct	*-0.21*	
		For >20,000, Deduct	*-0.28*	
		For Epoxy Paint, Add	*0.22*	

09 91 13 00-0157 Paint Exterior Wood Ceilings *(09 91 13 00-0134)*

09 91 13 00-0158 Paint Exterior Smooth Wood Ceilings *(09 91 13 00-0157)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0159	LF	1 Coat Paint, Cut-in Brush Work, Paint Exterior Wood Smooth Ceiling	0.23	
		For Oil Based Paint, Add	*0.01*	
		For Work >15' To 20' Above Floor, Add	*0.03*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.05*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.07*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.14*	
		For >100 To 250, Add	*0.07*	
		For >250 To 500, Add	*0.03*	
		For >2,500 To 5,000, Deduct	*-0.01*	
		For >5,000 To 10,000, Deduct	*-0.02*	
		For >10,000 To 20,000, Deduct	*-0.03*	
		For >20,000, Deduct	*-0.05*	
09 91 13 00-0160	SF	1 Coat Primer, Brush Work, Paint Exterior Wood Smooth Ceiling	1.34	
		For Oil Based Paint, Add	*0.08*	
		For Work >15' To 20' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.25*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.40*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.54*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.80*	
		For >100 To 250, Add	*0.38*	
		For >250 To 500, Add	*0.17*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.20*	
		For >20,000, Deduct	*-0.27*	
09 91 13 00-0161	SF	1 Coat Paint, Brush Work, Paint Exterior Wood Smooth Ceiling	1.37	
		For Oil Based Paint, Add	*0.08*	
		For Work >15' To 20' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.27*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.43*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.59*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.85*	
		For >100 To 250, Add	*0.40*	
		For >250 To 500, Add	*0.18*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.14*	
		For >10,000 To 20,000, Deduct	*-0.21*	
		For >20,000, Deduct	*-0.27*	
09 91 13 00-0162	SF	2 Coats Paint, Brush Work, Paint Exterior Wood Smooth Ceiling	2.51	
		For Oil Based Paint, Add	*0.16*	
		For Work >15' To 20' Above Floor, Add	*0.29*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.48*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.76*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.05*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.52*	
		For >100 To 250, Add	*0.73*	
		For >250 To 500, Add	*0.32*	
		For >2,500 To 5,000, Deduct	*-0.13*	
		For >5,000 To 10,000, Deduct	*-0.25*	
		For >10,000 To 20,000, Deduct	*-0.38*	
		For >20,000, Deduct	*-0.50*	
09 91 13 00-0163	SF	1 Coat Primer, Brush/Roller Work, Paint Exterior Smooth Wood Ceiling	1.12	
		For Oil Based Paint, Add	*0.08*	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.29*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.40*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.60*	
		For >100 To 250, Add	*0.29*	
		For >250 To 500, Add	*0.13*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.22*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0164	SF	1 Coat Paint, Brush/Roller Work, Paint Exterior Smooth Wood Ceiling	1.18	
		For Oil Based Paint, Add	*0.08*	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.46*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.68*	
		For >100 To 250, Add	*0.33*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.18*	
		For >20,000, Deduct	*-0.24*	
09 91 13 00-0165	SF	2 Coats Paint, Brush/Roller Work, Paint Exterior Smooth Wood Ceiling	2.13	
		For Oil Based Paint, Add	*0.14*	
		For Work >15' To 20' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.57*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.79*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.18*	
		For >100 To 250, Add	*0.57*	
		For >250 To 500, Add	*0.25*	
		For >2,500 To 5,000, Deduct	*-0.11*	
		For >5,000 To 10,000, Deduct	*-0.21*	
		For >10,000 To 20,000, Deduct	*-0.32*	
		For >20,000, Deduct	*-0.43*	
09 91 13 00-0166	SF	1 Coat Primer, Sprayed, Paint Exterior Smooth Wood Ceiling	0.89	
		For Oil Based Paint, Add	*0.06*	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.49*	
		For >100 To 250, Add	*0.24*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.18*	
09 91 13 00-0167	SF	1 Coat Paint, Sprayed, Paint Exterior Smooth Wood Ceiling	0.89	
		For Oil Based Paint, Add	*0.06*	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.49*	
		For >100 To 250, Add	*0.24*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.18*	
09 91 13 00-0168	SF	2 Coats Paint, Sprayed, Paint Exterior Smooth Wood Ceiling	1.62	
		For Oil Based Paint, Add	*0.11*	
		For Work >15' To 20' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.41*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.56*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.86*	
		For >100 To 250, Add	*0.42*	
		For >250 To 500, Add	*0.18*	
		For >2,500 To 5,000, Deduct	*-0.08*	
		For >5,000 To 10,000, Deduct	*-0.16*	
		For >10,000 To 20,000, Deduct	*-0.24*	
		For >20,000, Deduct	*-0.32*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0169		Paint Exterior Rough Wood Ceilings *(09 91 13 00-0157)*		
09 91 13 00-0170	SF	1 Coat Primer, Brush Work, Paint Exterior Wood Rough Ceiling	2.00	
		For Oil Based Paint, Add	*0.13*	
		For Work >15' To 20' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.38*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.60*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.83*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.20*	
		For >100 To 250, Add	*0.58*	
		For >250 To 500, Add	*0.25*	
		For >2,500 To 5,000, Deduct	*-0.10*	
		For >5,000 To 10,000, Deduct	*-0.20*	
		For >10,000 To 20,000, Deduct	*-0.30*	
		For >20,000, Deduct	*-0.40*	
09 91 13 00-0171	SF	1 Coat Paint, Brush Work, Paint Exterior Wood Rough Ceiling	1.97	
		For Oil Based Paint, Add	*0.11*	
		For Work >15' To 20' Above Floor, Add	*0.25*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.67*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.92*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.30*	
		For >100 To 250, Add	*0.61*	
		For >250 To 500, Add	*0.27*	
		For >2,500 To 5,000, Deduct	*-0.10*	
		For >5,000 To 10,000, Deduct	*-0.20*	
		For >10,000 To 20,000, Deduct	*-0.30*	
		For >20,000, Deduct	*-0.39*	
09 91 13 00-0172	SF	2 Coats Paint, Brush Work, Paint Exterior Wood Rough Ceiling	3.46	
		For Oil Based Paint, Add	*0.20*	
		For Work >15' To 20' Above Floor, Add	*0.43*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.72*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*1.14*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.57*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*2.24*	
		For >100 To 250, Add	*1.06*	
		For >250 To 500, Add	*0.46*	
		For >2,500 To 5,000, Deduct	*-0.17*	
		For >5,000 To 10,000, Deduct	*-0.35*	
		For >10,000 To 20,000, Deduct	*-0.52*	
		For >20,000, Deduct	*-0.69*	
09 91 13 00-0173	SF	1 Coat Primer, Brush/Roller Work, Paint Exterior Rough Wood Ceiling	1.84	
		For Oil Based Paint, Add	*0.12*	
		For Work >15' To 20' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.30*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.48*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.65*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.99*	
		For >100 To 250, Add	*0.48*	
		For >250 To 500, Add	*0.21*	
		For >2,500 To 5,000, Deduct	*-0.09*	
		For >5,000 To 10,000, Deduct	*-0.18*	
		For >10,000 To 20,000, Deduct	*-0.28*	
		For >20,000, Deduct	*-0.37*	
09 91 13 00-0174	SF	1 Coat Paint, Brush/Roller Work, Paint Exterior Rough Wood Ceiling	1.96	
		For Oil Based Paint, Add	*0.13*	
		For Work >15' To 20' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.52*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.72*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.08*	
		For >100 To 250, Add	*0.52*	
		For >250 To 500, Add	*0.23*	
		For >2,500 To 5,000, Deduct	*-0.10*	
		For >5,000 To 10,000, Deduct	*-0.20*	
		For >10,000 To 20,000, Deduct	*-0.29*	
		For >20,000, Deduct	*-0.39*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0175	SF	2 Coats Paint, Brush/Roller Work, Paint Exterior Rough Wood Ceiling	3.55	
		For Oil Based Paint, Add	*0.24*	
		For Work >15' To 20' Above Floor, Add	*0.34*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.56*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.90*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.24*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.88*	
		For >100 To 250, Add	*0.92*	
		For >250 To 500, Add	*0.40*	
		For >2,500 To 5,000, Deduct	*-0.18*	
		For >5,000 To 10,000, Deduct	*-0.36*	
		For >10,000 To 20,000, Deduct	*-0.53*	
		For >20,000, Deduct	*-0.71*	
09 91 13 00-0176	SF	1 Coat Primer, Sprayed, Paint Exterior Rough Wood Ceiling	1.42	
		For Oil Based Paint, Add	*0.10*	
		For Work >15' To 20' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.35*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.48*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.74*	
		For >100 To 250, Add	*0.36*	
		For >250 To 500, Add	*0.16*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.14*	
		For >10,000 To 20,000, Deduct	*-0.21*	
		For >20,000, Deduct	*-0.28*	
09 91 13 00-0177	SF	1 Coat Paint, Sprayed, Paint Exterior Rough Wood Ceiling	1.56	
		For Oil Based Paint, Add	*0.11*	
		For Work >15' To 20' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.25*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.40*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.56*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.84*	
		For >100 To 250, Add	*0.41*	
		For >250 To 500, Add	*0.18*	
		For >2,500 To 5,000, Deduct	*-0.08*	
		For >5,000 To 10,000, Deduct	*-0.16*	
		For >10,000 To 20,000, Deduct	*-0.23*	
		For >20,000, Deduct	*-0.31*	
09 91 13 00-0178	SF	2 Coats Paint, Sprayed, Paint Exterior Rough Wood Ceiling	2.86	
		For Oil Based Paint, Add	*0.20*	
		For Work >15' To 20' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.44*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.70*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.97*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.49*	
		For >100 To 250, Add	*0.73*	
		For >250 To 500, Add	*0.32*	
		For >2,500 To 5,000, Deduct	*-0.14*	
		For >5,000 To 10,000, Deduct	*-0.29*	
		For >10,000 To 20,000, Deduct	*-0.43*	
		For >20,000, Deduct	*-0.57*	

09 91 13 00-0179 Paint Exterior Metal Ceilings *(09 91 13 00-0134)*

09 91 13 00-0180 Paint Exterior Galvanized Ceilings *(09 91 13 00-0179)*
Note: Linseed oil or acrylic latex paint.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0181	SF	1 Coat Primer, Brush Work, Paint Exterior Galvanized Ceiling	1.35	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.38*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.52*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.77*	
		For >100 To 250, Add	*0.37*	
		For >250 To 500, Add	*0.16*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.14*	
		For >10,000 To 20,000, Deduct	*-0.20*	
		For >20,000, Deduct	*-0.27*	
09 91 13 00-0182	SF	1 Coat Paint, Brush Work, Paint Exterior Galvanized Ceiling	1.47	
		For Work >15' To 20' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.27*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.43*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.59*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.86*	
		For >100 To 250, Add	*0.41*	
		For >250 To 500, Add	*0.18*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.15*	
		For >10,000 To 20,000, Deduct	*-0.22*	
		For >20,000, Deduct	*-0.29*	
09 91 13 00-0183	SF	2 Coats Paint, Brush Work, Paint Exterior Galvanized Ceiling	2.71	
		For Work >15' To 20' Above Floor, Add	*0.29*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.48*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.76*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.05*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.55*	
		For >100 To 250, Add	*0.75*	
		For >250 To 500, Add	*0.33*	
		For >2,500 To 5,000, Deduct	*-0.14*	
		For >5,000 To 10,000, Deduct	*-0.27*	
		For >10,000 To 20,000, Deduct	*-0.41*	
		For >20,000, Deduct	*-0.54*	
09 91 13 00-0184	SF	1 Coat Primer, Brush/Roller Work, Paint Exterior Galvanized Ceiling	1.05	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.29*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.40*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.59*	
		For >100 To 250, Add	*0.29*	
		For >250 To 500, Add	*0.12*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.16*	
		For >20,000, Deduct	*-0.21*	
09 91 13 00-0185	SF	1 Coat Paint, Brush/Roller Work, Paint Exterior Galvanized Ceiling	1.16	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.46*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.67*	
		For >100 To 250, Add	*0.32*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.23*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0186	SF	2 Coats Paint, Brush/Roller Work, Paint Exterior Galvanized Ceiling	2.09	
		For Work >15' To 20' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.57*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.79*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.17*	
		For >100 To 250, Add	*0.57*	
		For >250 To 500, Add	*0.25*	
		For >2,500 To 5,000, Deduct	*-0.10*	
		For >5,000 To 10,000, Deduct	*-0.21*	
		For >10,000 To 20,000, Deduct	*-0.31*	
		For >20,000, Deduct	*-0.42*	
09 91 13 00-0187	SF	1 Coat Primer, Sprayed, Paint Exterior Galvanized Ceiling	1.05	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.51*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.16*	
		For >20,000, Deduct	*-0.21*	
09 91 13 00-0188	SF	1 Coat Paint, Sprayed, Paint Exterior Galvanized Ceiling	1.17	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.28*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.39*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.60*	
		For >100 To 250, Add	*0.29*	
		For >250 To 500, Add	*0.13*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.18*	
		For >20,000, Deduct	*-0.23*	
09 91 13 00-0189	SF	2 Coats Paint, Sprayed, Paint Exterior Galvanized Ceiling	1.94	
		For Work >15' To 20' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.41*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.56*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.90*	
		For >100 To 250, Add	*0.45*	
		For >250 To 500, Add	*0.20*	
		For >2,500 To 5,000, Deduct	*-0.10*	
		For >5,000 To 10,000, Deduct	*-0.19*	
		For >10,000 To 20,000, Deduct	*-0.29*	
		For >20,000, Deduct	*-0.39*	

09 91 13 00-0190 Paint Exterior Aluminum And Aluminum Alloy Ceilings *(09 91 13 00-0179)*

Note: Alkyd enamel paint.

09 91 13 00-0191	SF	1 Coat Primer, Brush Work, Paint Exterior Aluminum And Aluminum Alloy Ceiling	1.35	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.38*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.52*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.77*	
		For >100 To 250, Add	*0.37*	
		For >250 To 500, Add	*0.16*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.14*	
		For >10,000 To 20,000, Deduct	*-0.20*	
		For >20,000, Deduct	*-0.27*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0192	SF	1 Coat Paint, Brush Work, Paint Exterior Aluminum And Aluminum Alloy Ceiling	1.47	
		For Work >15' To 20' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.27*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.43*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.59*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.86*	
		For >100 To 250, Add	*0.41*	
		For >250 To 500, Add	*0.18*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.15*	
		For >10,000 To 20,000, Deduct	*-0.22*	
		For >20,000, Deduct	*-0.29*	
09 91 13 00-0193	SF	2 Coats Paint, Brush Work, Paint Exterior Aluminum And Aluminum Alloy Ceiling	2.71	
		For Work >15' To 20' Above Floor, Add	*0.29*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.48*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.76*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.05*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.55*	
		For >100 To 250, Add	*0.75*	
		For >250 To 500, Add	*0.33*	
		For >2,500 To 5,000, Deduct	*-0.14*	
		For >5,000 To 10,000, Deduct	*-0.27*	
		For >10,000 To 20,000, Deduct	*-0.41*	
		For >20,000, Deduct	*-0.54*	
09 91 13 00-0194	SF	1 Coat Primer, Brush/Roller Work, Paint Exterior Aluminum And Aluminum Alloy Ceiling	1.18	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.29*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.40*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.61*	
		For >100 To 250, Add	*0.30*	
		For >250 To 500, Add	*0.13*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.18*	
		For >20,000, Deduct	*-0.24*	
09 91 13 00-0195	SF	1 Coat Paint, Brush/Roller Work, Paint Exterior Aluminum And Aluminum Alloy Ceiling	1.29	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.46*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.69*	
		For >100 To 250, Add	*0.34*	
		For >250 To 500, Add	*0.15*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.19*	
		For >20,000, Deduct	*-0.26*	
09 91 13 00-0196	SF	2 Coats Paint, Brush/Roller Work, Paint Exterior Aluminum And Aluminum Alloy Ceiling	2.35	
		For Work >15' To 20' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.57*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.79*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.21*	
		For >100 To 250, Add	*0.59*	
		For >250 To 500, Add	*0.26*	
		For >2,500 To 5,000, Deduct	*-0.12*	
		For >5,000 To 10,000, Deduct	*-0.24*	
		For >10,000 To 20,000, Deduct	*-0.35*	
		For >20,000, Deduct	*-0.47*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0197	SF	1 Coat Primer, Sprayed, Paint Exterior Aluminum And Aluminum Alloy Ceiling	1.05	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.51*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.16*	
		For >20,000, Deduct	*-0.21*	
09 91 13 00-0198	SF	1 Coat Paint, Sprayed, Paint Exterior Aluminum And Aluminum Alloy Ceiling	1.05	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.51*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.16*	
		For >20,000, Deduct	*-0.21*	
09 91 13 00-0199	SF	2 Coats Paint, Sprayed, Paint Exterior Aluminum And Aluminum Alloy Ceiling	1.94	
		For Work >15' To 20' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.41*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.56*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.90*	
		For >100 To 250, Add	*0.45*	
		For >250 To 500, Add	*0.20*	
		For >2,500 To 5,000, Deduct	*-0.10*	
		For >5,000 To 10,000, Deduct	*-0.19*	
		For >10,000 To 20,000, Deduct	*-0.29*	
		For >20,000, Deduct	*-0.39*	

09 91 13 00-0200 Paint Exterior Corrugated Metal Ceilings *(09 91 13 00-0179)*

09 91 13 00-0201	SF	1 Coat Primer, Sprayed, Paint Exterior Corrugated Metal Ceiling	1.15	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.25*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.34*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.54*	
		For >100 To 250, Add	*0.27*	
		For >250 To 500, Add	*0.12*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.23*	
09 91 13 00-0202	SF	1 Coat Paint, Sprayed, Paint Exterior Corrugated Metal Ceiling	1.30	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.19*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.31*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.66*	
		For >100 To 250, Add	*0.32*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.20*	
		For >20,000, Deduct	*-0.26*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0203	SF	2 Coats Paint, Sprayed, Paint Exterior Corrugated Metal Ceiling	2.41	
		For Work >15' To 20' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.34*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.54*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.74*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.17*	
		For >100 To 250, Add	*0.58*	
		For >250 To 500, Add	*0.26*	
		For >2,500 To 5,000, Deduct	*-0.12*	
		For >5,000 To 10,000, Deduct	*-0.24*	
		For >10,000 To 20,000, Deduct	*-0.36*	
		For >20,000, Deduct	*-0.48*	

09 91 13 00-0204 Paint Exterior Floors *(09 91 13)*

09 91 13 00-0205 Paint Exterior Concrete Floors *(09 91 13 00-0204)*

09 91 13 00-0206	LF	1 Coat Paint, Cut-in Brush Work, Paint Exterior Concrete Floors And Decks	0.15	
		For Up To 100, Add	*0.09*	
		For >100 To 250, Add	*0.05*	
		For >250 To 500, Add	*0.02*	
		For >2,500 To 5,000, Deduct	*-0.01*	
		For >5,000 To 10,000, Deduct	*-0.02*	
		For >10,000 To 20,000, Deduct	*-0.02*	
		For >20,000, Deduct	*-0.03*	
09 91 13 00-0207	SF	1 Coat Primer, Brush Work, Paint Exterior Concrete Floors And Decks	0.85	
		For Oil Based Paint, Add	*0.06*	
		For Epoxy Paint, Add	*0.12*	
		For Up To 100, Add	*0.49*	
		For >100 To 250, Add	*0.24*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.17*	
09 91 13 00-0208	SF	1 Coat Paint, Brush Work, Paint Exterior Concrete Floors And Decks	0.91	
		For Oil Based Paint, Add	*0.06*	
		For Epoxy Paint, Add	*0.11*	
		For Up To 100, Add	*0.56*	
		For >100 To 250, Add	*0.27*	
		For >250 To 500, Add	*0.12*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.14*	
		For >20,000, Deduct	*-0.18*	
09 91 13 00-0209	SF	2 Coats Paint, Brush Work, Paint Exterior Concrete Floors And Decks	1.71	
		For Oil Based Paint, Add	*0.11*	
		For Epoxy Paint, Add	*0.21*	
		For Up To 100, Add	*1.04*	
		For >100 To 250, Add	*0.50*	
		For >250 To 500, Add	*0.22*	
		For >2,500 To 5,000, Deduct	*-0.09*	
		For >5,000 To 10,000, Deduct	*-0.17*	
		For >10,000 To 20,000, Deduct	*-0.26*	
		For >20,000, Deduct	*-0.34*	
09 91 13 00-0210	SF	1 Coat Primer, Brush/Roller Work, Paint Exterior Concrete Floors And Decks	0.72	
		For Oil Based Paint, Add	*0.05*	
		For Epoxy Paint, Add	*0.11*	
		For Up To 100, Add	*0.39*	
		For >100 To 250, Add	*0.19*	
		For >250 To 500, Add	*0.08*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.07*	
		For >10,000 To 20,000, Deduct	*-0.11*	
		For >20,000, Deduct	*-0.14*	
09 91 13 00-0211	SF	1 Coat Paint, Brush/Roller Work, Paint Exterior Concrete Floors And Decks	0.80	
		For Oil Based Paint, Add	*0.05*	
		For Epoxy Paint, Add	*0.10*	
		For Up To 100, Add	*0.48*	
		For >100 To 250, Add	*0.23*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.08*	
		For >10,000 To 20,000, Deduct	*-0.12*	
		For >20,000, Deduct	*-0.16*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0212	SF	2 Coats Paint, Brush/Roller Work, Paint Exterior Concrete Floors And Decks	1.33	
		For Oil Based Paint, Add	*0.09*	
		For Epoxy Paint, Add	*0.19*	
		For Up To 100, Add	*0.76*	
		For >100 To 250, Add	*0.37*	
		For >250 To 500, Add	*0.16*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.20*	
		For >20,000, Deduct	*-0.27*	
09 91 13 00-0213	SF	1 Coat Primer, Sprayed, Paint Exterior Concrete Floors And Decks	0.59	
		For Oil Based Paint, Add	*0.04*	
		For Epoxy Paint, Add	*0.12*	
		For Up To 100, Add	*0.26*	
		For >100 To 250, Add	*0.13*	
		For >250 To 500, Add	*0.06*	
		For >2,500 To 5,000, Deduct	*-0.03*	
		For >5,000 To 10,000, Deduct	*-0.06*	
		For >10,000 To 20,000, Deduct	*-0.09*	
		For >20,000, Deduct	*-0.12*	
09 91 13 00-0214	SF	1 Coat Paint, Sprayed, Paint Exterior Concrete Floors And Decks	0.68	
		For Oil Based Paint, Add	*0.05*	
		For Epoxy Paint, Add	*0.11*	
		For Up To 100, Add	*0.36*	
		For >100 To 250, Add	*0.18*	
		For >250 To 500, Add	*0.08*	
		For >2,500 To 5,000, Deduct	*-0.03*	
		For >5,000 To 10,000, Deduct	*-0.07*	
		For >10,000 To 20,000, Deduct	*-0.10*	
		For >20,000, Deduct	*-0.14*	
09 91 13 00-0215	SF	2 Coats Paint, Sprayed, Paint Exterior Concrete Floors And Decks	1.23	
		For Oil Based Paint, Add	*0.09*	
		For Epoxy Paint, Add	*0.21*	
		For Up To 100, Add	*0.62*	
		For >100 To 250, Add	*0.31*	
		For >250 To 500, Add	*0.13*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.18*	
		For >20,000, Deduct	*-0.25*	
09 91 13 00-0216	SF	1 Coat Non-Slip Paint, Brush/Roller Work, Paint Exterior Concrete Floors And Decks	2.29	
		For Up To 100, Add	*0.70*	
		For >100 To 250, Add	*0.38*	
		For >250 To 500, Add	*0.17*	
		For >2,500 To 5,000, Deduct	*-0.11*	
		For >5,000 To 10,000, Deduct	*-0.23*	
		For >10,000 To 20,000, Deduct	*-0.34*	
		For >20,000, Deduct	*-0.46*	
09 91 13 00-0217	SF	1 Coat Anti-Slip Paint, Single Component Epoxy Coating, Brush/Roller Work, Paint Exterior Concrete Floors And Decks	5.53	
		For Up To 100, Add	*1.19*	
		For >100 To 250, Add	*0.70*	
		For >250 To 500, Add	*0.34*	
		For >2,500 To 5,000, Deduct	*-0.28*	
		For >5,000 To 10,000, Deduct	*-0.55*	
		For >10,000 To 20,000, Deduct	*-0.83*	
		For >20,000, Deduct	*-1.11*	
09 91 13 00-0218	SF	1 Coat Anti-Slip Paint, High Performance Epoxy Coating, Brush/Roller Work, Paint Exterior Concrete Floors And Decks	6.89	
		For Up To 100, Add	*1.39*	
		For >100 To 250, Add	*0.84*	
		For >250 To 500, Add	*0.40*	
		For >2,500 To 5,000, Deduct	*-0.34*	
		For >5,000 To 10,000, Deduct	*-0.69*	
		For >10,000 To 20,000, Deduct	*-1.03*	
		For >20,000, Deduct	*-1.38*	

09 91 13 00-0219 Paint Exterior Wood Floors *(09 91 13 00-0204)*

09 91 13 00-0220	LF	1 Coat Paint, Cut-in Brush Work, Paint Exterior Wood Floors And Decks	0.19	
		For Up To 100, Add	*0.11*	
		For >100 To 250, Add	*0.05*	
		For >250 To 500, Add	*0.02*	
		For >2,500 To 5,000, Deduct	*-0.01*	
		For >5,000 To 10,000, Deduct	*-0.02*	
		For >10,000 To 20,000, Deduct	*-0.03*	
		For >20,000, Deduct	*-0.04*	
09 91 13 00-0221	SF	1 Coat Primer, Brush Work, Paint Exterior Wood Floors And Decks	1.07	
		For Oil Based Paint, Add	*0.07*	
		For Up To 100, Add	*0.59*	
		For >100 To 250, Add	*0.29*	
		For >250 To 500, Add	*0.13*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.16*	
		For >20,000, Deduct	*-0.21*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0222	SF	1 Coat Paint, Brush Work, Paint Exterior Wood Floors And Decks	1.13	
		For Oil Based Paint, Add	*0.07*	
		For Up To 100, Add	*0.67*	
		For >100 To 250, Add	*0.32*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.23*	
09 91 13 00-0223	SF	2 Coats Paint, Brush Work, Paint Exterior Wood Floors And Decks	2.14	
		For Oil Based Paint, Add	*0.14*	
		For Up To 100, Add	*1.25*	
		For >100 To 250, Add	*0.60*	
		For >250 To 500, Add	*0.26*	
		For >2,500 To 5,000, Deduct	*-0.11*	
		For >5,000 To 10,000, Deduct	*-0.21*	
		For >10,000 To 20,000, Deduct	*-0.32*	
		For >20,000, Deduct	*-0.43*	
09 91 13 00-0224	SF	1 Coat Primer, Brush/Roller Work, Paint Exterior Wood Floors And Decks	1.00	
		For Oil Based Paint, Add	*0.07*	
		For Up To 100, Add	*0.51*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.15*	
		For >20,000, Deduct	*-0.20*	
09 91 13 00-0225	SF	1 Coat Paint, Brush/Roller Work, Paint Exterior Wood Floors And Decks	1.06	
		For Oil Based Paint, Add	*0.07*	
		For Up To 100, Add	*0.59*	
		For >100 To 250, Add	*0.28*	
		For >250 To 500, Add	*0.12*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.16*	
		For >20,000, Deduct	*-0.21*	
09 91 13 00-0226	SF	2 Coats Paint, Brush/Roller Work, Paint Exterior Wood Floors And Decks	1.77	
		For Oil Based Paint, Add	*0.12*	
		For Up To 100, Add	*0.91*	
		For >100 To 250, Add	*0.44*	
		For >250 To 500, Add	*0.20*	
		For >2,500 To 5,000, Deduct	*-0.09*	
		For >5,000 To 10,000, Deduct	*-0.18*	
		For >10,000 To 20,000, Deduct	*-0.27*	
		For >20,000, Deduct	*-0.35*	
09 91 13 00-0227	SF	1 Coat Primer, Sprayed, Paint Exterior Wood Floors And Decks	0.73	
		For Oil Based Paint, Add	*0.05*	
		For Up To 100, Add	*0.37*	
		For >100 To 250, Add	*0.18*	
		For >250 To 500, Add	*0.08*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.07*	
		For >10,000 To 20,000, Deduct	*-0.11*	
		For >20,000, Deduct	*-0.15*	
09 91 13 00-0228	SF	1 Coat Paint, Sprayed, Paint Exterior Wood Floors And Decks	0.89	
		For Oil Based Paint, Add	*0.06*	
		For Up To 100, Add	*0.49*	
		For >100 To 250, Add	*0.24*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.18*	
09 91 13 00-0229	SF	2 Coats Paint, Sprayed, Paint Exterior Wood Floors And Decks	1.48	
		For Oil Based Paint, Add	*0.10*	
		For Up To 100, Add	*0.75*	
		For >100 To 250, Add	*0.37*	
		For >250 To 500, Add	*0.16*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.15*	
		For >10,000 To 20,000, Deduct	*-0.22*	
		For >20,000, Deduct	*-0.30*	
09 91 13 00-0230	SF	1 Coat Non-Slip Paint, Brush Work, Paint Exterior Wood Floors And Decks	2.41	
		For Up To 100, Add	*0.79*	
		For >100 To 250, Add	*0.42*	
		For >250 To 500, Add	*0.19*	
		For >2,500 To 5,000, Deduct	*-0.12*	
		For >5,000 To 10,000, Deduct	*-0.24*	
		For >10,000 To 20,000, Deduct	*-0.36*	
		For >20,000, Deduct	*-0.48*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0231	SF	1 Coat Non-Slip Epoxy Paint, Brush Work, Paint Exterior Wood Floors And Decks	7.01	
		For Up To 100, Add	*1.48*	
		For >100 To 250, Add	*0.88*	
		For >250 To 500, Add	*0.42*	
		For >2,500 To 5,000, Deduct	*-0.35*	
		For >5,000 To 10,000, Deduct	*-0.70*	
		For >10,000 To 20,000, Deduct	*-1.05*	
		For >20,000, Deduct	*-1.40*	
09 91 13 00-0232		Paint Exterior Doors And Windows *(09 91 13)*		
09 91 13 00-0233		Paint Exterior Door Frames *(09 91 13 00-0232)*		
09 91 13 00-0234	LF	1 Coat Primer, Brush/Roller Work, Paint Exterior Wood Door Frame And Trim	1.32	
		For Painting Either Interior Or Exterior Only, Deduct	*-0.36*	
09 91 13 00-0235	LF	1 Coat Paint, Brush/Roller Work, Paint Exterior Wood Door Frame And Trim	1.69	
		For Painting Either Interior Or Exterior Only, Deduct	*-0.45*	
09 91 13 00-0236	LF	2 Coats Paint, Brush/Roller Work, Paint Exterior Wood Door Frame And Trim	2.87	
		For Painting Either Interior Or Exterior Only, Deduct	*-0.76*	
09 91 13 00-0237	LF	1 Coat Primer, Brush/Roller Work, Paint Exterior Metal Door Frame And Trim	1.33	
		For Painting Either Interior Or Exterior Only, Deduct	*-0.36*	
09 91 13 00-0238	LF	1 Coat Paint, Brush/Roller Work, Paint Exterior Metal Door Frame And Trim	1.70	
		For Painting Either Interior Or Exterior Only, Deduct	*-0.45*	
09 91 13 00-0239	LF	2 Coats Paint, Brush/Roller Work, Paint Exterior Metal Door Frame And Trim	2.88	
		For Painting Either Interior Or Exterior Only, Deduct	*-0.77*	
09 91 13 00-0240		Paint Exterior Metal Doors *(09 91 13 00-0232)*		
09 91 13 00-0241	EA	1 Coat Primer, Brush/Roller Work, Paint Exterior Metal Door	61.85	
		Note: One face		
		For Half Louvered Door, Add	*5.18*	
		For Full Louvered Door, Add	*8.64*	
		For Electrostatic Painting, Add	*10.28*	
		For >5 To 10, Deduct	*-3.09*	
		For >10 To 25, Deduct	*-6.19*	
		For >25, Deduct	*-9.28*	
09 91 13 00-0242	EA	1 Coat Paint, Brush/Roller Work, Paint Exterior Metal Door	61.85	
		Note: One face		
		For Half Louvered Door, Add	*5.18*	
		For Full Louvered Door, Add	*8.64*	
		For Electrostatic Painting, Add	*10.28*	
		For >5 To 10, Deduct	*-3.09*	
		For >10 To 25, Deduct	*-6.19*	
		For >25, Deduct	*-9.28*	
09 91 13 00-0243	EA	2 Coat Paint, Brush/Roller Work, Paint Exterior Metal Door	112.62	
		Note: One face		
		For Half Louvered Door, Add	*8.75*	
		For Full Louvered Door, Add	*14.59*	
		For Electrostatic Painting, Add	*19.40*	
		For >5 To 10, Deduct	*-5.63*	
		For >10 To 25, Deduct	*-11.26*	
		For >25, Deduct	*-16.89*	
09 91 13 00-0244	EA	1 Coat Primer, Brush/Roller Work, Paint Exterior Metal Door	111.03	
		Note: Both faces		
		For Half Louvered Door, Add	*9.29*	
		For Full Louvered Door, Add	*15.49*	
		For Electrostatic Painting, Add	*18.46*	
		For >5 To 10, Deduct	*-5.55*	
		For >10 To 25, Deduct	*-11.10*	
		For >25, Deduct	*-16.65*	
09 91 13 00-0245	EA	1 Coat Paint, Brush/Roller Work, Paint Exterior Metal Door	111.03	
		Note: Both faces		
		For Half Louvered Door, Add	*9.29*	
		For Full Louvered Door, Add	*15.49*	
		For Electrostatic Painting, Add	*18.46*	
		For >5 To 10, Deduct	*-5.55*	
		For >10 To 25, Deduct	*-11.10*	
		For >25, Deduct	*-16.65*	
09 91 13 00-0246	EA	2 Coats Paint, Brush/Roller Work, Paint Exterior Metal Door	202.95	
		Note: Both faces		
		For Half Louvered Door, Add	*15.72*	
		For Full Louvered Door, Add	*26.21*	
		For Electrostatic Painting, Add	*35.01*	
		For >5 To 10, Deduct	*-10.15*	
		For >10 To 25, Deduct	*-20.30*	
		For >25, Deduct	*-30.44*	
09 91 13 00-0247	EA	1 Coat Primer, Sprayed, Paint Exterior Metal Door	58.15	
		Note: One face		
		For Half Louvered Door, Add	*4.22*	
		For Full Louvered Door, Add	*7.03*	
		For Electrostatic Painting, Add	*10.32*	
		For >5 To 10, Deduct	*-2.91*	
		For >10 To 25, Deduct	*-5.82*	
		For >25, Deduct	*-8.72*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0248	EA	1 Coat Paint, Sprayed, Paint Exterior Metal Door	58.15	
		Note: One face		
		For Half Louvered Door, Add	*4.22*	
		For Full Louvered Door, Add	*7.03*	
		For Electrostatic Painting, Add	*10.32*	
		For >5 To 10, Deduct	*-2.91*	
		For >10 To 25, Deduct	*-5.82*	
		For >25, Deduct	*-8.72*	
09 91 13 00-0249	EA	2 Coats Paint, Sprayed, Paint Exterior Metal Door	107.17	
		Note: One face		
		For Half Louvered Door, Add	*7.12*	
		For Full Louvered Door, Add	*11.87*	
		For Electrostatic Painting, Add	*19.67*	
		For >5 To 10, Deduct	*-5.36*	
		For >10 To 25, Deduct	*-10.72*	
		For >25, Deduct	*-16.08*	
09 91 13 00-0250	EA	1 Coat Primer, Sprayed, Paint Exterior Metal Door	104.38	
		Note: Both faces		
		For Half Louvered Door, Add	*7.56*	
		For Full Louvered Door, Add	*12.60*	
		For Electrostatic Painting, Add	*18.53*	
		For >5 To 10, Deduct	*-5.22*	
		For >10 To 25, Deduct	*-10.44*	
		For >25, Deduct	*-15.66*	
09 91 13 00-0251	EA	1 Coat Paint, Sprayed, Paint Exterior Metal Door	104.38	
		Note: Both faces		
		For Half Louvered Door, Add	*7.56*	
		For Full Louvered Door, Add	*12.60*	
		For Electrostatic Painting, Add	*18.53*	
		For >5 To 10, Deduct	*-5.22*	
		For >10 To 25, Deduct	*-10.44*	
		For >25, Deduct	*-15.66*	
09 91 13 00-0252	EA	2 Coats Paint, Sprayed, Paint Exterior Metal Door	193.25	
		Note: Both faces		
		For Half Louvered Door, Add	*12.80*	
		For Full Louvered Door, Add	*21.33*	
		For Electrostatic Painting, Add	*35.52*	
		For >5 To 10, Deduct	*-9.66*	
		For >10 To 25, Deduct	*-19.33*	
		For >25, Deduct	*-28.99*	
09 91 13 00-0253	SF	1 Coat Primer, Brush/Roller Work, Paint Exterior Metal Overhead, Sectional Door, Or Roll Up Door	2.82	
		For Electrostatic Painting, Add	*0.35*	
09 91 13 00-0254	SF	1 Coat Paint, Brush/Roller Work, Paint Exterior Metal Overhead, Sectional Door, Or Roll Up Door	3.00	
		For Electrostatic Painting, Add	*0.40*	
09 91 13 00-0255	SF	2 Coats Paint, Brush/Roller Work, Paint Exterior Metal Overhead, Section Door, Or Roll Up Door	6.12	
		For Electrostatic Painting, Add	*0.78*	
09 91 13 00-0256	SF	1 Coat Primer, Sprayed, Paint Exterior Metal Overhead, Sectional Door, Or Roll Up Door	3.10	
		For Electrostatic Painting, Add	*0.38*	
09 91 13 00-0257	SF	1 Coat Paint, Sprayed, Paint Exterior Metal Overhead, Sectional Door, Or Roll Up Door	3.28	
		For Electrostatic Painting, Add	*0.42*	
09 91 13 00-0258	SF	2 Coats Paint, Sprayed, Paint Exterior Metal Overhead, Sectional Door, Or Roll Up Door	6.34	
		For Electrostatic Painting, Add	*0.82*	

09 91 13 00-0259 Paint Exterior Wood Doors *(09 91 13 00-0232)*

09 91 13 00-0260	EA	1 Coat Primer, Brush/Roller Work, Paint Exterior Wood Door	58.11	
		Note: One face		
		For Half Louvered Door, Add	*5.18*	
		For Full Louvered Door, Add	*8.64*	
		For >5 To 10, Deduct	*-2.91*	
		For >10 To 25, Deduct	*-5.81*	
		For >25, Deduct	*-8.72*	
09 91 13 00-0261	EA	1 Coat Paint, Brush/Roller Work, Paint Exterior Wood Door	58.11	
		Note: One face		
		For Half Louvered Door, Add	*5.18*	
		For Full Louvered Door, Add	*8.64*	
		For >5 To 10, Deduct	*-2.91*	
		For >10 To 25, Deduct	*-5.81*	
		For >25, Deduct	*-8.72*	
09 91 13 00-0262	EA	2 Coats Paint, Brush/Roller Work, Paint Exterior Wood Door	105.18	
		Note: One face		
		For Half Louvered Door, Add	*8.75*	
		For Full Louvered Door, Add	*14.59*	
		For >5 To 10, Deduct	*-5.26*	
		For >10 To 25, Deduct	*-10.52*	
		For >25, Deduct	*-15.78*	
09 91 13 00-0263	EA	1 Coat Primer, Brush/Roller Work, Paint Exterior Wood Door	104.30	
		Note: Both faces		
		For Half Louvered Door, Add	*9.29*	
		For Full Louvered Door, Add	*15.49*	
		For >5 To 10, Deduct	*-5.22*	
		For >10 To 25, Deduct	*-10.43*	
		For >25, Deduct	*-15.65*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0264	EA	1 Coat Paint, Brush/Roller Work, Paint Exterior Wood Door	104.30	
		Note: Both faces		
		For Half Louvered Door, Add	*9.29*	
		For Full Louvered Door, Add	*15.49*	
		For >5 To 10, Deduct	*-5.22*	
		For >10 To 25, Deduct	*-10.43*	
		For >25, Deduct	*-15.65*	
09 91 13 00-0265	EA	2 Coats Paint, Brush Roller Work, Paint Exterior Wood Door	189.49	
		Note: Both faces		
		For Half Louvered Door, Add	*15.72*	
		For Full Louvered Door, Add	*26.21*	
		For >5 To 10, Deduct	*-9.47*	
		For >10 To 25, Deduct	*-18.95*	
		For >25, Deduct	*-28.42*	
09 91 13 00-0266	EA	1 Coat Primer, Sprayed, Paint Exterior Wood Door	54.03	
		Note: One face		
		For Half Louvered Door, Add	*4.22*	
		For Full Louvered Door, Add	*7.03*	
		For >5 To 10, Deduct	*-2.70*	
		For >10 To 25, Deduct	*-5.40*	
		For >25, Deduct	*-8.10*	
09 91 13 00-0267	EA	1 Coat Paint, Sprayed, Paint Exterior Wood Door	54.03	
		Note: One face		
		For Half Louvered Door, Add	*4.22*	
		For Full Louvered Door, Add	*7.03*	
		For >5 To 10, Deduct	*-2.70*	
		For >10 To 25, Deduct	*-5.40*	
		For >25, Deduct	*-8.10*	
09 91 13 00-0268	EA	2 Coats Paint, Sprayed, Paint Exterior Wood Door	99.00	
		Note: One face		
		For Half Louvered Door, Add	*7.13*	
		For Full Louvered Door, Add	*11.88*	
		For >5 To 10, Deduct	*-4.95*	
		For >10 To 25, Deduct	*-9.90*	
		For >25, Deduct	*-14.85*	
09 91 13 00-0269	EA	1 Coat Primer, Sprayed, Paint Exterior Wood Door	96.98	
		Note: Both faces		
		For Half Louvered Door, Add	*7.56*	
		For Full Louvered Door, Add	*12.60*	
		For >5 To 10, Deduct	*-4.85*	
		For >10 To 25, Deduct	*-9.70*	
		For >25, Deduct	*-14.55*	
09 91 13 00-0270	EA	1 Coat Paint, Sprayed, Paint Exterior Wood Door	96.98	
		Note: Both faces		
		For Half Louvered Door, Add	*7.56*	
		For Full Louvered Door, Add	*12.60*	
		For >5 To 10, Deduct	*-4.85*	
		For >10 To 25, Deduct	*-9.70*	
		For >25, Deduct	*-14.55*	
09 91 13 00-0271	EA	2 Coats Paint, Sprayed, Paint Exterior Wood Door	178.44	
		Note: Both faces		
		For Half Louvered Door, Add	*12.80*	
		For Full Louvered Door, Add	*21.33*	
		For >5 To 10, Deduct	*-8.92*	
		For >10 To 25, Deduct	*-17.84*	
		For >25, Deduct	*-26.77*	
09 91 13 00-0272	SF	1 Coat Primer, Brush/Roller Work, Paint Exterior Wood Overhead, Sectional Door, Or Roll Up Door	2.78	
09 91 13 00-0273	SF	1 Coat Paint, Brush/Roller Work, Paint Exterior Wood Overhead, Sectional Door, Or Roll Up Door	2.91	
09 91 13 00-0274	SF	2 Coats Paint, Brush/Roller Work, Paint Exterior Wood Overhead, Sectional Door, Or Roll Up Door	5.97	
09 91 13 00-0275	SF	1 Coat Primer, Sprayed, Paint Exterior Wood Overhead, Sectional Door, Or Roll Up Door	3.04	
09 91 13 00-0276	SF	1 Coat Paint, Sprayed, Paint Exterior Wood Overhead, Sectional Door, Or Roll Up Door	3.19	
09 91 13 00-0277	SF	2 Coats Paint, Sprayed, Paint Exterior Wood Overhead, Sectional Door, Or Roll Up Door	6.18	
09 91 13 00-0278		Paint Exterior Metal Windows *(09 91 13 00-0232)*		
		Note: Two finish coats paint over rust inhibitive primer.		
09 91 13 00-0279	EA	Up To 8 SF Window Size, 1 Coat Primer And Two Coats Paint, Brush Work, Exterior Metal Window Including Trim	95.58	
		For Electrostatic Painting, Add	*12.28*	
		For >5 To 10, Deduct	*-4.78*	
		For >10 To 25, Deduct	*-9.56*	
		For >25, Deduct	*-14.34*	
09 91 13 00-0280	EA	>8 To 14 SF Window Size, 1 Coat Primer And Two Coats Paint, Brush Work, Exterior Metal Window Including Trim	117.38	
		For Electrostatic Painting, Add	*15.94*	
		For >5 To 10, Deduct	*-5.87*	
		For >10 To 25, Deduct	*-11.74*	
		For >25, Deduct	*-17.61*	
09 91 13 00-0281	EA	>14 To 20 SF Window Size, 1 Coat Primer And Two Coats Paint, Brush Work, Exterior Metal Window Including Trim	158.96	
		For Electrostatic Painting, Add	*21.87*	
		For >5 To 10, Deduct	*-7.95*	
		For >10 To 25, Deduct	*-15.90*	
		For >25, Deduct	*-23.84*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0282	EA	>20 To 26 SF Window Size, 1 Coat Primer And Two Coats Paint, Brush Work, Exterior Metal Window Including Trim	179.04	
		For Electrostatic Painting, Add	*24.65*	
		For >5 To 10, Deduct	*-8.95*	
		For >10 To 25, Deduct	*-17.90*	
		For >25, Deduct	*-26.86*	
09 91 13 00-0283	EA	>26 To 34 SF Window Size, 1 Coat Primer And Two Coats Paint, Brush Work, Exterior Metal Window Including Trim	198.44	
		For Electrostatic Painting, Add	*27.27*	
		For >5 To 10, Deduct	*-9.92*	
		For >10 To 25, Deduct	*-19.84*	
		For >25, Deduct	*-29.77*	
09 91 13 00-0284	SF	>34 SF Window Size, 1 Coat Primer And Two Coats Paint, Brush Work, Exterior Metal Window Including Trim	6.29	
		For Electrostatic Painting, Add	*0.86*	

09 91 13 00-0285 Paint Exterior Wood Windows *(09 91 13 00-0232)*

Note: Two finish coats paint over primer.

09 91 13 00-0286	EA	Up To 8 SF Window Size, 1 Coat Primer And Two Coats Paint, Brush Work, Exterior Wood Window Including Trim	93.09	
		For >5 To 10, Deduct	*-4.65*	
		For >10 To 25, Deduct	*-9.31*	
		For >25, Deduct	*-13.96*	
09 91 13 00-0287	EA	>8 To 14 SF Window Size, 1 Coat Primer And Two Coats Paint, Brush Work, Exterior Wood Window Including Trim	113.54	
		For >5 To 10, Deduct	*-5.68*	
		For >10 To 25, Deduct	*-11.35*	
		For >25, Deduct	*-17.03*	
09 91 13 00-0288	EA	>14 To 20 SF Window Size, 1 Coat Primer And Two Coats Paint, Brush Work, Exterior Wood Window Including Trim	153.50	
		For >5 To 10, Deduct	*-7.68*	
		For >10 To 25, Deduct	*-15.35*	
		For >25, Deduct	*-23.03*	
09 91 13 00-0289	EA	>20 To 26 SF Window Size, 1 Coat Primer And Two Coats Paint, Brush Work, Exterior Wood Window Including Trim	172.87	
		For >5 To 10, Deduct	*-8.64*	
		For >10 To 25, Deduct	*-17.29*	
		For >25, Deduct	*-25.93*	
09 91 13 00-0290	EA	>26 To 34 SF Window Size, 1 Coat Primer And Two Coats Paint, Brush Work, Exterior Wood Window Including Trim	191.65	
		For >5 To 10, Deduct	*-9.58*	
		For >10 To 25, Deduct	*-19.17*	
		For >25, Deduct	*-28.75*	
09 91 13 00-0291	SF	>34 SF Window Size, 1 Coat Primer And Two Coats Paint, Brush Work, Exterior Wood Window Including Trim	6.38	

09 91 13 00-0292 Paint Exterior Security Screens *(09 91 13 00-0232)*

09 91 13 00-0293	SF	1 Coat Primer, Brush/Roller Work, Paint Exterior Security Screen	1.68	
		For Electrostatic Painting, Add	*0.23*	
09 91 13 00-0294	SF	1 Coat Paint, Brush/Roller Work, Paint Exterior Security Screen	1.70	
		For Electrostatic Painting, Add	*0.21*	
09 91 13 00-0295	SF	2 Coats Paint, Brush/Roller Work, Paint Exterior Security Screen	2.82	
		For Electrostatic Painting, Add	*0.36*	

09 91 13 00-0296 Paint Exterior Window Guards *(09 91 13 00-0232)*

09 91 13 00-0297	SF	1 Coat Primer, Brush/Roller Work, Paint Exterior Metal Window Guards	1.68	
09 91 13 00-0298	SF	1 Coat Paint, Brush/Roller Work, Paint Exterior Metal Window Guards	1.70	
09 91 13 00-0299	SF	2 Coats Paint, Brush/Roller Work, Paint Exterior Metal Window Guards	2.82	

09 91 13 00-0300 Paint Exterior Window Trim *(09 91 13 00-0232)*

09 91 13 00-0301	LF	1 Coat Primer, Brush/Roller Work, Paint Exterior Wood Window Frame And Trim	1.57	
09 91 13 00-0302	LF	1 Coat Paint, Brush/Roller Work, Paint Exterior Wood Window Frame And Trim	1.57	
09 91 13 00-0303	LF	2 Coats Paint, Brush/Roller Work, Paint Exterior Wood Window Frame And Trim	2.58	
09 91 13 00-0304	LF	1 Coat Primer, Brush/Roller Work, Paint Exterior Metal Window Frame And Trim	1.81	
09 91 13 00-0305	LF	1 Coat Paint, Brush/Roller Work, Paint Exterior Metal Window Frame And Trim	1.81	
09 91 13 00-0306	LF	2 Coats Paint, Brush/Roller Work, Paint Exterior Metal Window Frame And Trim	3.07	

09 91 13 00-0307 Paint Exterior Roofing And Trim *(09 91 13)*

09 91 13 00-0308 Paint Stain Or Seal Wood Roofing *(09 91 13 00-0307)*

09 91 13 00-0309	SF	1 Coat Paint, Brush/Roller Work, Stain And Seal Shingles/Shake	2.33	
		For Up To 100, Add	*1.12*	
		For >100 To 250, Add	*0.55*	
		For >250 To 500, Add	*0.24*	
09 91 13 00-0310	SF	2 Coats Stain, Brush/Roller Work, Stain And Seal Shingles/Shake	4.29	
		For Up To 100, Add	*2.02*	
		For >100 To 250, Add	*1.00*	
		For >250 To 500, Add	*0.44*	

09 91 13 00-0311 Paint Metal Roofing *(09 91 13 00-0307)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0312	SF	1 Coat Paint, Brush/Roller Work, Paint Metal Roofing	1.03	
		For Up To 100, Add	*0.46*	
		For >100 To 250, Add	*0.23*	
		For >250 To 500, Add	*0.10*	
09 91 13 00-0313	SF	2 Coats Paint, Brush/Roller Work, Paint Metal Roofing	1.79	
		For Up To 100, Add	*0.82*	
		For >100 To 250, Add	*0.41*	
		For >250 To 500, Add	*0.18*	
09 91 13 00-0314		Paint Fascia Board *(09 91 13 00-0307)*		
09 91 13 00-0315	LF	1 Coat Primer, Brush/Roller Work, Paint Fascia Board	0.96	
		For Up To 100, Add	*0.45*	
		For >100 To 250, Add	*0.22*	
		For >250 To 500, Add	*0.10*	
09 91 13 00-0316	LF	1 Coat Paint, Brush/Roller Work, Paint Fascia Board	0.96	
		For Up To 100, Add	*0.45*	
		For >100 To 250, Add	*0.22*	
		For >250 To 500, Add	*0.10*	
09 91 13 00-0317	LF	2 Coats Paint, Brush/Roller Work, Paint Fascia Board	1.67	
		For Up To 100, Add	*0.80*	
		For >100 To 250, Add	*0.40*	
		For >250 To 500, Add	*0.18*	
09 91 13 00-0318		Paint Soffit *(09 91 13 00-0307)*		
09 91 13 00-0319	SF	1 Coat Primer, Brush/Roller Work, Paint Soffit	1.16	
		For Up To 100, Add	*0.48*	
		For >100 To 250, Add	*0.24*	
		For >250 To 500, Add	*0.11*	
09 91 13 00-0320	SF	1 Coat Paint, Brush/Roller Work, Paint Soffit	1.16	
		For Up To 100, Add	*0.48*	
		For >100 To 250, Add	*0.24*	
		For >250 To 500, Add	*0.11*	
09 91 13 00-0321	SF	2 Coats Paint, Brush/Roller Work, Paint Soffit	1.97	
		For Up To 100, Add	*0.85*	
		For >100 To 250, Add	*0.43*	
		For >250 To 500, Add	*0.19*	
09 91 13 00-0322		Acrylic Elastomeric Coating For All Types Of Roofs *(09 91 13 00-0307)*		
09 91 13 00-0323	SF	2 Coats, Energy-Armor Ultra SunWhite Ultra Premium Acrylic Elastomeric Roof Coating (ICP APOC® AP-252)	3.32	
09 91 13 00-0324		Elastomeric Coating For All Types Of Roofs *(09 91 13 00-0307)*		
09 91 13 00-0325	SF	1 Coat, White Elastomeric Liquid Silicone Roof Membrane Coating (ICP APOC® Armor Flex® AP-585) Note: Per Coat	3.98	
09 91 13 00-0326		Paint Metal Surfaces *(09 91 13)* Note: Tasks can be used for exterior or interior applications.		
09 91 13 00-0327		Paint Structural Steel *(09 91 13 00-0326)*		
09 91 13 00-0328		Paint Structural Steel, Brush Work *(09 91 13 00-0327)*		
09 91 13 00-0329	SF	1 Field Coat Primer, Brush/Roller Work, Paint Exterior Structural Steel	1.17	
		For Up To 100, Add	*0.72*	
		For >100 To 250, Add	*0.34*	
		For >250 To 500, Add	*0.15*	
		For Epoxy Paint, Add	*0.14*	
09 91 13 00-0330	SF	1 Field Coat Paint, Brush/Roller Work, Paint Exterior Structural Steel	1.04	
		For Up To 100, Add	*0.62*	
		For >100 To 250, Add	*0.30*	
		For >250 To 500, Add	*0.13*	
		For Epoxy Paint, Add	*0.13*	
09 91 13 00-0331		Paint Structural Steel, Spray Work *(09 91 13 00-0327)*		
09 91 13 00-0332	SF	1 Field Coat Primer, Sprayed, Paint Exterior Structural Steel	0.87	
		For Electrostatic Painting, Add	*0.13*	
		For Up To 100, Add	*0.49*	
		For >100 To 250, Add	*0.24*	
		For >250 To 500, Add	*0.10*	
		For Epoxy Paint, Add	*0.12*	
09 91 13 00-0333	SF	1 Field Coat Paint, Sprayed, Paint Exterior Structural Steel	0.73	
		For Electrostatic Painting, Add	*0.11*	
		For Up To 100, Add	*0.39*	
		For >100 To 250, Add	*0.19*	
		For >250 To 500, Add	*0.08*	
		For Epoxy Paint, Add	*0.12*	
09 91 13 00-0334		Paint Metal Decking, Beams And Bar Joist *(09 91 13 00-0327)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0335	SF	1 Coat Primer, Sprayed, Paint Exposed Metal Decking	0.97	
		For Up To 100, Add	*0.57*	
		For >100 To 250, Add	*0.27*	
		For >250 To 500, Add	*0.12*	
		For Epoxy Paint, Add	*0.13*	
09 91 13 00-0336	SF	1 Coat Paint, Sprayed, Paint Exposed Metal Decking	0.97	
		For Up To 100, Add	*0.57*	
		For >100 To 250, Add	*0.27*	
		For >250 To 500, Add	*0.12*	
		For Epoxy Paint, Add	*0.13*	
09 91 13 00-0337	SF	2 Coats Paint, Sprayed, Paint Exposed Metal Decking	1.63	
		For Up To 100, Add	*0.90*	
		For >100 To 250, Add	*0.44*	
		For >250 To 500, Add	*0.19*	
		For Epoxy Paint, Add	*0.24*	
09 91 13 00-0338	SF	1 Coat Primer, Brush/Roller Work, Paint Metal Beams And Bar Joists	1.42	
		For Up To 100, Add	*0.76*	
		For >100 To 250, Add	*0.37*	
		For >250 To 500, Add	*0.16*	
		For Epoxy Paint, Add	*0.22*	
09 91 13 00-0339	SF	1 Coat Paint, Brush/Roller Work, Paint Metal Beams And Bar Joists	1.38	
		For Up To 100, Add	*0.77*	
		For >100 To 250, Add	*0.37*	
		For >250 To 500, Add	*0.16*	
		For Epoxy Paint, Add	*0.20*	
09 91 13 00-0340	SF	2 Coats Paint, Brush/Roller Work, Paint Metal Beams And Bar Joists	2.61	
		For Up To 100, Add	*1.42*	
		For >100 To 250, Add	*0.69*	
		For >250 To 500, Add	*0.30*	
		For Epoxy Paint, Add	*0.40*	
09 91 13 00-0341	SF	1 Coat Primer, Sprayed, Paint Metal Beams And Bar Joists	1.20	
		For Up To 100, Add	*0.67*	
		For >100 To 250, Add	*0.32*	
		For >250 To 500, Add	*0.14*	
		For Epoxy Paint, Add	*0.18*	
09 91 13 00-0342	SF	1 Coat Paint, Sprayed, Paint Metal Beams And Bar Joists	1.20	
		For Up To 100, Add	*0.67*	
		For >100 To 250, Add	*0.32*	
		For >250 To 500, Add	*0.14*	
		For Epoxy Paint, Add	*0.18*	
09 91 13 00-0343	SF	2 Coats Paint, Sprayed, Paint Metal Beams And Bar Joists	2.05	
		For Up To 100, Add	*1.08*	
		For >100 To 250, Add	*0.53*	
		For >250 To 500, Add	*0.23*	
		For Epoxy Paint, Add	*0.33*	

09 91 13 00-0344 Paint Steel Pipes *(09 91 13 00-0326)*

Note: Includes pipe, tubes, rails, conduit, etc.

09 91 13 00-0345	LF	1 Coat Primer, 1/2" To 1-1/2" Diameter, Paint Conduit Or Steel Pipe	1.89	
		For Electrostatic Painting, Add	*0.25*	
		For Epoxy Paint, Add	*0.21*	
09 91 13 00-0346	LF	1 Coat Primer, 2" To 3-1/2" Diameter, Paint Conduit Or Steel Pipe	2.11	
		For Electrostatic Painting, Add	*0.28*	
		For Epoxy Paint, Add	*0.24*	
09 91 13 00-0347	LF	1 Coat Primer, 4" Diameter, Paint Steel Pipes	2.39	
		For Electrostatic Painting, Add	*0.32*	
		For Epoxy Paint, Add	*0.28*	
09 91 13 00-0348	LF	1 Coat Primer, 6" To 8" Diameter, Paint Steel Pipes	2.98	
		For Electrostatic Painting, Add	*0.39*	
		For Epoxy Paint, Add	*0.34*	
09 91 13 00-0349	LF	1 Coat Primer, 10" To 12" Diameter, Paint Steel Pipes	3.77	
		For Electrostatic Painting, Add	*0.50*	
		For Epoxy Paint, Add	*0.43*	
09 91 13 00-0350	LF	1 Coat Paint, 1/2"To 1-1/2" Diameter, Paint Conduit Or Steel Pipe	1.89	
		For Electrostatic Painting, Add	*0.25*	
		For Epoxy Paint, Add	*0.21*	
09 91 13 00-0351	LF	1 Coat Paint, 2" To 3-1/2" Diameter, Paint Conduit Or Steel Pipe	2.11	
		For Electrostatic Painting, Add	*0.28*	
		For Epoxy Paint, Add	*0.24*	
09 91 13 00-0352	LF	1 Coat Paint, 4" Diameter, Paint Steel Pipes	2.39	
		For Electrostatic Painting, Add	*0.32*	
		For Epoxy Paint, Add	*0.28*	
09 91 13 00-0353	LF	1 Coat Paint, 6" To 8" Diameter, Paint Steel Pipes	2.98	
		For Electrostatic Painting, Add	*0.39*	
		For Epoxy Paint, Add	*0.34*	
09 91 13 00-0354	LF	1 Coat Paint, 10" To 12" Diameter, Paint Steel Pipes	3.77	
		For Electrostatic Painting, Add	*0.50*	
		For Epoxy Paint, Add	*0.43*	
09 91 13 00-0355	LF	2 Coats Paint, 1/2" To 1-1/2" Diameter, Paint Conduit Or Steel Pipe	3.88	
		For Electrostatic Painting, Add	*0.54*	
		For Epoxy Paint, Add	*0.51*	
09 91 13 00-0356	LF	2 Coats Paint, 2" To 3-1/2" Diameter, Paint Conduit Or Steel Pipe	4.23	
		For Electrostatic Painting, Add	*0.56*	
		For Epoxy Paint, Add	*0.49*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0357	LF	2 Coats Paint, 4" Diameter, Paint Steel Pipes	4.59	
		For Electrostatic Painting, Add	*0.62*	
		For Epoxy Paint, Add	*0.54*	
09 91 13 00-0358	LF	2 Coats Paint, 6" To 8" Diameter, Paint Steel Pipes	5.78	
		For Electrostatic Painting, Add	*0.77*	
		For Epoxy Paint, Add	*0.67*	
09 91 13 00-0359	LF	2 Coats Paint, 10" To 12" Diameter, Paint Steel Pipes	7.13	
		For Electrostatic Painting, Add	*0.96*	
		For Epoxy Paint, Add	*0.84*	
09 91 13 00-0360	EA	1 Coat Paint, Paint Exposed Single Or Double Gang Outlet Box	8.98	
		For Electrostatic Painting, Add	*0.96*	
		For Epoxy Paint, Add	*0.57*	

09 91 13 00-0361 Paint Metal Louvers *(09 91 13 00-0326)*

09 91 13 00-0362	SF	1 Coat Primer, Brush/Roller Work, Paint Ventilation Louver, SF Of Opening Area	1.58	
		For Electrostatic Painting, Add	*0.19*	
09 91 13 00-0363	SF	1 Coat Alkyd Paint, Brush/Roller Work, Paint Ventilation Louver, SF Of Opening Area	1.62	
		For Electrostatic Painting, Add	*0.20*	
09 91 13 00-0364	SF	2 Coats Alkyd Paint, Brush/Roller Work, Paint Ventilation Louver, SF Of Opening Area	3.32	
		For Electrostatic Painting, Add	*0.42*	

09 91 13 00-0365 Paint Ladders *(09 91 13 00-0326)*

09 91 13 00-0366	LF	1 Coat Alkyd Primer, Brush/Roller Work, Paint Ladders	4.26	
		For Epoxy Paint, Add	*0.27*	
09 91 13 00-0367	LF	1 Coat Alkyd Enamel Paint, Brush/Roller Work, Paint Ladders	4.76	
		For Epoxy Paint, Add	*0.30*	
09 91 13 00-0368	LF	2 Coats Alkyd Enamel Paint, Brush/Roller Work, Paint Ladders	9.35	
		For Epoxy Paint, Add	*0.55*	

09 91 13 00-0369 Paint Handrails *(09 91 13 00-0326)*

09 91 13 00-0370	LF	1 Coat Alkyd Primer, Brush/Roller Work, 1 Rail, Paint Hand Rail And Bracket	1.72	
		For Epoxy Paint, Add	*0.15*	
09 91 13 00-0371	LF	1 Coat Alkyd Enamel Paint, Brush/Roller Work, 1 Rail, Paint Hand Rail And Bracket	1.91	
		For Epoxy Paint, Add	*0.16*	
09 91 13 00-0372	LF	2 Coats Alkyd Enamel Paint, Brush/Roller Work, 1 Rail, Paint Hand Rail And Bracket	3.11	
		For Epoxy Paint, Add	*0.22*	
09 91 13 00-0373	LF	1 Coat Alkyd Primer, Brush/Roller Work, 1 Rail, Paint Pipe Rail And Pickets	3.25	
		For Epoxy Paint, Add	*0.44*	
09 91 13 00-0374	LF	1 Coat Alkyd Enamel Paint, Brush/Roller Work, 1 Rail, Paint Pipe Rail And Pickets	3.53	
		For Epoxy Paint, Add	*0.46*	
09 91 13 00-0375	LF	2 Coats Alkyd Enamel Paint, Brush/Roller Work, 1 Rail, Paint Pipe Rail And Pickets	6.01	
		For Epoxy Paint, Add	*0.72*	
09 91 13 00-0376	LF	1 Coat Alkyd Primer, Brush/Roller Work, 2 Rails, Paint Pipe Rail And Pickets	3.48	
		For Epoxy Paint, Add	*0.45*	
09 91 13 00-0377	LF	1 Coat Alkyd Enamel Paint, Brush/Roller Work, 2 Rails, Paint Pipe Rail And Pickets	3.80	
		For Epoxy Paint, Add	*0.47*	
09 91 13 00-0378	LF	2 Coats Alkyd Enamel Paint, Brush/Roller Work, 2 Rails, Paint Pipe Rail And Pickets	6.36	
		For Epoxy Paint, Add	*0.74*	
09 91 13 00-0379	LF	1 Coat Alkyd Primer, Brush/Roller Work, Paint Balustrades	1.93	
		For Epoxy Paint, Add	*0.23*	
09 91 13 00-0380	LF	1 Coat Alkyd Enamel Paint, Brush/Roller Work, Paint Balustrades	2.11	
		For Epoxy Paint, Add	*0.24*	
09 91 13 00-0381	LF	2 Coats Alkyd Enamel Paint, Brush/Roller Work, Paint Balustrades	3.87	
		For Epoxy Paint, Add	*0.47*	

09 91 13 00-0382 Paint Grating *(09 91 13 00-0326)*

09 91 13 00-0383	SF	1 Coat Primer, Brush/Roller Work, Paint Gratings And Frames	3.11	
		For Epoxy Paint, Add	*0.22*	
09 91 13 00-0384	SF	1 Coat Paint, Brush/Roller Work, Paint Gratings And Frames	3.18	
		For Epoxy Paint, Add	*0.24*	
09 91 13 00-0385	SF	2 Coats Paint, Brush/Roller Work, Paint Gratings And Frames	4.79	
		For Epoxy Paint, Add	*0.40*	

09 91 13 00-0386 Equipment And Tanks *(09 91 13 00-0326)*

09 91 13 00-0387 Paint Valves *(09 91 13 00-0386)*

Note: Includes 1 coat primer and 1 coat paint finish

09 91 13 00-0388	EA	Prime And Paint 4" Diameter And Smaller Valve	33.31	
09 91 13 00-0389	EA	Prime And Paint 6" To 10" Diameter Valve	41.00	
09 91 13 00-0390	EA	Prime And Paint 12" To 18" Diameter Valve	53.80	
09 91 13 00-0391	EA	Prime And Paint 20" To 24" Diameter Valve	71.73	
09 91 13 00-0392	EA	Prime And Paint >24" To 36" Diameter Valve	97.35	
09 91 13 00-0393	EA	Prime And Paint >36" To 48" Diameter Valve	133.22	

09 91 13 00-0394 Paint Pumps And Motors *(09 91 13 00-0386)*

Note: Includes 1 coat primer and 1 coat paint finish

09 91 13 00-0395	EA	Prime And Paint Pump Under 1 HP	102.49	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0396	EA	Prime And Paint Pump, 1 HP To 5 HP	135.79	
09 91 13 00-0397	EA	Prime And Paint Pump, >5 HP To 10 HP	163.99	
09 91 13 00-0398	EA	Prime And Paint Pump, >10 HP To 20 HP	184.49	
09 91 13 00-0399	EA	Prime And Paint Pump, >20 HP To 30 HP	215.25	
09 91 13 00-0400	EA	Prime And Paint Pump, >30 HP To 50 HP	245.99	
09 91 13 00-0401	EA	Prime And Paint Pump, >50 HP To 75 HP	271.62	
09 91 13 00-0402	EA	Prime And Paint Pump, >75 HP	307.50	

09 91 13 00-0403 Paint Storage Tanks *(09 91 13 00-0386)*

09 91 13 00-0404	SF	1 Coat Primer, Roller, Paint Storage Tank, Exterior Surface	1.31	
09 91 13 00-0405	SF	1 Coat Paint, Roller, Paint Storage Tank, Exterior Surface	1.75	
09 91 13 00-0406	SF	2 Coats Paint, Roller, Paint Storage Tank, Exterior Surface	3.34	
09 91 13 00-0407	SF	1 Coat Primer, Roller, Paint Storage Tank, Interior Surface	1.74	
09 91 13 00-0408	SF	1 Coat Paint, Roller, Paint Storage Tank, Interior Surface	2.23	
09 91 13 00-0409	SF	2 Coats Paint, Roller, Paint Storage Tank, Interior Surface	4.29	
09 91 13 00-0410	SF	1 Coat Primer, Sprayed, Paint Storage Tank, Exterior Surface	1.39	
09 91 13 00-0411	SF	1 Coat Paint, Sprayed, Paint Storage Tank, Exterior Surface	1.73	
09 91 13 00-0412	SF	2 Coats Paint, Sprayed, Paint Storage Tank, Exterior Surface	3.37	
09 91 13 00-0413	SF	1 Coat Primer, Sprayed, Paint Storage Tank, Interior Surface	1.59	
09 91 13 00-0414	SF	1 Coat Paint, Sprayed, Paint Storage Tank, Interior Surface	2.10	
09 91 13 00-0415	SF	2 Coats Paint, Sprayed, Paint Storage Tank, Interior Surface	4.08	

09 91 13 00-0416 Other Site Work Painting *(09 91 13)*

09 91 13 00-0417 Paint Fencing *(09 91 13 00-0416)*

Note: Per side of fence. Based on gross fence area (length of fence x height of fence).

09 91 13 00-0418	SF	1 Coat Paint, Brush/Roller, Paint Existing Chain Link Fence	0.95	
		For Epoxy Paint, Add	*0.12*	
		For Up To 100, Add	*0.57*	
		For >100 To 250, Add	*0.28*	
		For >250 To 500, Add	*0.12*	
09 91 13 00-0419	SF	2 Coats Paint, Brush/Roller, Paint Existing Chain Link Fence	1.79	
		For Epoxy Paint, Add	*0.23*	
		For Up To 100, Add	*1.07*	
		For >100 To 250, Add	*0.51*	
		For >250 To 500, Add	*0.22*	
09 91 13 00-0420	SF	1 Coat Paint, Sprayed, Paint Existing Chain Link Fence	0.88	
		For Epoxy Paint, Add	*0.13*	
		For Electrostatic Painting, Add	*0.13*	
		For Up To 100, Add	*0.49*	
		For >100 To 250, Add	*0.24*	
		For >250 To 500, Add	*0.10*	
09 91 13 00-0421	SF	2 Coats Paint, Sprayed, Paint Existing Chain Link Fence	1.63	
		For Epoxy Paint, Add	*0.26*	
		For Electrostatic Painting, Add	*0.25*	
		For Up To 100, Add	*0.87*	
		For >100 To 250, Add	*0.43*	
		For >250 To 500, Add	*0.19*	
09 91 13 00-0422	SF	1 Coat Primer, Brush/Roller, Paint Wrought Iron Fence	0.89	
		For Epoxy Paint, Add	*0.13*	
		For Up To 100, Add	*0.49*	
		For >100 To 250, Add	*0.24*	
		For >250 To 500, Add	*0.10*	
09 91 13 00-0423	SF	1 Coat Paint, Brush/Roller, Paint Wrought Iron Fence	0.83	
		For Epoxy Paint, Add	*0.11*	
		For Up To 100, Add	*0.48*	
		For >100 To 250, Add	*0.23*	
		For >250 To 500, Add	*0.10*	
09 91 13 00-0424	SF	Each Additional Coat, Brush/Roller, Paint Wrought Iron Fence	0.60	
		For Epoxy Paint, Add	*0.10*	
		For Up To 100, Add	*0.31*	
		For >100 To 250, Add	*0.15*	
		For >250 To 500, Add	*0.07*	
09 91 13 00-0425	SF	1 Coat Primer, Brush/Roller, Paint Picket Fence	1.10	
		For Epoxy Paint, Add	*0.10*	
		For Up To 100, Add	*0.74*	
		For >100 To 250, Add	*0.35*	
		For >250 To 500, Add	*0.15*	
09 91 13 00-0426	SF	1 Coat Paint, Brush/Roller, Paint Picket Fence	1.10	
		For Epoxy Paint, Add	*0.10*	
		For Up To 100, Add	*0.74*	
		For >100 To 250, Add	*0.35*	
		For >250 To 500, Add	*0.15*	
09 91 13 00-0427	SF	Each Additional Coat, Brush/Roller, Paint Picket Fence	0.80	
		For Epoxy Paint, Add	*0.09*	
		For Up To 100, Add	*0.51*	
		For >100 To 250, Add	*0.24*	
		For >250 To 500, Add	*0.11*	
09 91 13 00-0428	SF	1 Coat Paint, Brush/Roller, Paint Wood Fences	0.85	
		For Up To 100, Add	*0.49*	
		For >100 To 250, Add	*0.24*	
		For >250 To 500, Add	*0.10*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0429	SF	2 Coats Paint, Brush/Roller, Paint Wood Fences	1.53	
		For Up To 100, Add	*0.85*	
		For >100 To 250, Add	*0.41*	
		For >250 To 500, Add	*0.18*	
09 91 13 00-0430	SF	1 Coat Paint, Sprayed, Paint Wood Fences	0.68	
		For Up To 100, Add	*0.36*	
		For >100 To 250, Add	*0.18*	
		For >250 To 500, Add	*0.08*	
09 91 13 00-0431	SF	2 Coats Paint, Sprayed, Paint Wood Fences	1.30	
		For Up To 100, Add	*0.68*	
		For >100 To 250, Add	*0.33*	
		For >250 To 500, Add	*0.15*	

09 91 13 00-0432 Paint Shutters Or Blinds, Solid Panel *(09 91 13 00-0416)*

09 91 13 00-0433	SF	1 Coat Primer, Brush Work, Paint Shutter Or Blinds, Solid Panel	3.38	
09 91 13 00-0434	SF	1 Coat Paint, Brush Work, Paint Shutter Or Blinds, Solid Panel	3.40	
09 91 13 00-0435	SF	2 Coats Paint, Brush Work, Paint Shutter Or Blinds, Solid Panel	6.04	
09 91 13 00-0436	SF	1 Coat Primer, Sprayed, Paint Shutter Or Blinds, Solid Panel	2.10	
09 91 13 00-0437	SF	1 Coat Paint, Sprayed, Paint Shutter Or Blinds, Solid Panel	2.12	
09 91 13 00-0438	SF	2 Coats Paint, Sprayed, Paint Shutter Or Blinds, Solid Panel	3.93	

09 91 13 00-0439 Paint Shutters Or Blinds, Louvered Panel *(09 91 13 00-0416)*

09 91 13 00-0440	SF	1 Coat Primer, Brush Work, Paint Shutter Or Blinds, Louvered Panel	4.16	
09 91 13 00-0441	SF	1 Coat Paint, Brush Work, Paint Shutter Or Blinds, Louvered Panel	4.18	
09 91 13 00-0442	SF	2 Coats Paint, Brush Work, Paint Shutter Or Blinds, Louvered Panel	7.44	
09 91 13 00-0443	SF	1 Coat Primer, Sprayed, Paint Shutter Or Blinds, Louvered Panel	2.53	
09 91 13 00-0444	SF	1 Coat Paint, Sprayed, Paint Shutter Or Blinds, Louvered Panel	2.55	
09 91 13 00-0445	SF	2 Coats Paint, Sprayed, Paint Shutter Or Blinds, Louvered Panel	4.74	

09 91 13 00-0446 Paint Flagpoles *(09 91 13 00-0416)*

09 91 13 00-0447	EA	1 Coat Paint, 20' High, Paint Steel Flagpole	244.75	
09 91 13 00-0448	EA	1 Coat Paint, 30' High, Paint Steel Flagpole	330.36	
09 91 13 00-0449	EA	1 Coat Paint, 40' High, Paint Steel Flagpole	416.02	
09 91 13 00-0450	EA	1 Coat Paint, 50' High, Paint Steel Flagpole	501.68	
09 91 13 00-0451	EA	1 Coat Paint, 70' High, Paint Steel Flagpole	660.99	
09 91 13 00-0452	EA	1 Coat Paint, 80' High, Paint Steel Flagpole	745.14	
09 91 13 00-0453	EA	1 Coat Paint, 90' High, Paint Steel Flagpole	829.31	

09 91 13 00-0454 Paint Lattice Or Trellis *(09 91 13 00-0416)*

09 91 13 00-0455	SF	1 Coat Paint, Sprayed, Per Side, Paint Wood Lattice Or Trellis	1.64	
		For Up To 100, Add	*1.08*	
		For >100 To 250, Add	*0.51*	
		For >250 To 500, Add	*0.22*	
09 91 13 00-0456	SF	2 Coats Paint, Sprayed, Per Side, Paint Wood Lattice Or Trellis	3.06	
		For Up To 100, Add	*2.00*	
		For >100 To 250, Add	*0.95*	
		For >250 To 500, Add	*0.41*	

09 91 13 00-0457 Paint Exterior Stairs *(09 91 13)*

09 91 13 00-0458 Paint Exterior Concrete Stairs *(09 91 13 00-0457)*

09 91 13 00-0459	RSR	1 Coat Primer, Brush/Roller Work, Paint Up To 4' Wide Exterior Concrete Stair	18.53	
09 91 13 00-0460	RSR	1 Coat Alkyd Enamel Paint, Brush/Roller Work, Paint Up To 4' Wide Exterior Concrete Stair	18.53	
09 91 13 00-0461	RSR	1 Coat Non-Slip Paint, Brush/Roller Work, Paint Up To 4' Wide Exterior Concrete Stair	24.85	
09 91 13 00-0462	RSR	1 Coat Non-Slip Epoxy Paint, Brush/Roller Work, Paint Up To 4' Wide Exterior Concrete Stair	43.27	
09 91 13 00-0463	RSR	2 Coats Alkyd Enamel Paint, Brush/Roller Work, Paint Up To 4' Wide Exterior Concrete Stair	37.07	

09 91 13 00-0464 Paint Exterior Metal Stairs *(09 91 13 00-0457)*

09 91 13 00-0465	RSR	1 Coat Primer, Brush/Roller Work, Paint Up To 4' Wide Exterior Metal Stair	9.83	
		For Oil Based Paint, Add	*0.54*	
09 91 13 00-0466	RSR	1 Coat Alkyd Enamel Paint, Brush/Roller Work, Paint Up To 4' Wide Exterior Metal Stair	9.83	
		For Oil Based Paint, Add	*0.54*	
09 91 13 00-0467	RSR	2 Coats Alkyd Enamel Paint, Brush/Roller Work, Paint Up To 4' Wide Exterior Metal Stair	19.66	
		For Oil Based Paint, Add	*1.08*	

09 91 13 00-0468 Paint Exterior Wood Stairs *(09 91 13 00-0457)*

09 91 13 00-0469	RSR	1 Coat Primer, Brush/Roller Work, Paint Up To 4' Wide Exterior Wood Stair	9.69	
09 91 13 00-0470	RSR	1 Coat Alkyd Enamel Paint, Brush/Roller Work, Paint Up To 4' Wide Exterior Wood Stair	9.68	
09 91 13 00-0471	RSR	1 Coat Non-Slip Paint, Brush/Roller Work, Paint Up To 4' Wide Exterior Wood Stair	16.00	
09 91 13 00-0472	RSR	1 Coat Non-Slip Epoxy Paint, Brush/Roller Work, Paint Up To 4' Wide Exterior Wood Stair	34.42	
09 91 13 00-0473	RSR	2 Coats Alkyd Enamel Paint, Brush/Roller Work, Paint Up To 4' Wide Exterior Wood Stair	19.38	

09 91 13 00-0474 Paint Exterior Stair Nosing *(09 91 13 00-0457)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0475	LF	1 Coat Paint, Up To 2", Non-Slip, Brush Work, Paint Exterior Yellow Stair Safety Strip	1.80	

09 91 13 00-0476 Paint Exterior Trim *(09 91 13)*

09 91 13 00-0477 Paint Exterior Metal Trim And Gutters *(09 91 13 00-0476)*

09 91 13 00-0478	SF	1 Coat Primer, Brush Work, Paint Exterior Exposed Metal Trim	1.30	
		For Work >15' To 20' Above Floor, Add		*0.16*
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add		*0.26*
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add		*0.42*
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add		*0.57*
		Note: Applied only to work area above 40'.		
09 91 13 00-0479	SF	1 Coat Paint, Brush Work, Paint Exterior Exposed Metal Trim	1.41	
		For Work >15' To 20' Above Floor, Add		*0.17*
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add		*0.29*
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add		*0.46*
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add		*0.63*
		Note: Applied only to work area above 40'.		
09 91 13 00-0480	SF	2 Coats Paint, Brush Work, Paint Exterior Exposed Metal Trim	2.56	
		For Work >15' To 20' Above Floor, Add		*0.31*
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add		*0.51*
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add		*0.82*
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add		*1.12*
		Note: Applied only to work area above 40'.		
09 91 13 00-0481	SF	1 Coat Primer, Brush/Roller Work, Paint Exterior Exposed Metal Trim	1.18	
		For Work >15' To 20' Above Floor, Add		*0.14*
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add		*0.23*
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add		*0.37*
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add		*0.51*
		Note: Applied only to work area above 40'.		
09 91 13 00-0482	SF	1 Coat Paint, Brush/Roller Work, Paint Exterior Exposed Metal Trim	1.29	
		For Work >15' To 20' Above Floor, Add		*0.15*
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add		*0.26*
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add		*0.41*
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add		*0.57*
		Note: Applied only to work area above 40'.		
09 91 13 00-0483	SF	2 Coats Paint, Brush/Roller Work, Paint Exterior Exposed Metal Trim	2.31	
		For Work >15' To 20' Above Floor, Add		*0.27*
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add		*0.45*
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add		*0.72*
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add		*0.98*
		Note: Applied only to work area above 40'.		
09 91 13 00-0484	LF	1 Coat Paint, Brush Work, Paint Exterior Gutter And Downspout	2.04	
		For Work >15' To 20' Above Floor, Add		*0.25*
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add		*0.42*
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add		*0.68*
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add		*0.93*
		Note: Applied only to work area above 40'.		
09 91 13 00-0485	LF	2 Coats Paint, Brush Work, Paint Exterior Gutter And Downspout	2.52	
		For Work >15' To 20' Above Floor, Add		*0.37*
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add		*0.62*
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add		*0.98*
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add		*1.35*
		Note: Applied only to work area above 40'.		

09 91 13 00-0486 Paint Exterior Wood Trim *(09 91 13 00-0476)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0487	SF	1 Coat Primer, Brush Work, Paint Exterior Wood Trim	1.87	
		For Oil Based Paint, Add	*0.12*	
		For Work >15' To 20' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.57*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.78*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.13*	
		For >100 To 250, Add	*0.54*	
		For >250 To 500, Add	*0.24*	
		For >2,500 To 5,000, Deduct	*-0.09*	
		For >5,000 To 10,000, Deduct	*-0.19*	
		For >10,000 To 20,000, Deduct	*-0.28*	
		For >20,000, Deduct	*-0.37*	
09 91 13 00-0488	SF	1 Coat Paint, Brush Work, Paint Exterior Wood Trim	2.03	
		For Oil Based Paint, Add	*0.13*	
		For Work >15' To 20' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.38*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.61*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.84*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.22*	
		For >100 To 250, Add	*0.59*	
		For >250 To 500, Add	*0.25*	
		For >2,500 To 5,000, Deduct	*-0.10*	
		For >5,000 To 10,000, Deduct	*-0.20*	
		For >10,000 To 20,000, Deduct	*-0.30*	
		For >20,000, Deduct	*-0.41*	
09 91 13 00-0489	SF	2 Coats Paint, Brush Work, Paint Exterior Wood Trim	3.72	
		For Oil Based Paint, Add	*0.24*	
		For Work >15' To 20' Above Floor, Add	*0.41*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.68*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*1.09*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.50*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*2.19*	
		For >100 To 250, Add	*1.05*	
		For >250 To 500, Add	*0.46*	
		For >2,500 To 5,000, Deduct	*-0.19*	
		For >5,000 To 10,000, Deduct	*-0.37*	
		For >10,000 To 20,000, Deduct	*-0.56*	
		For >20,000, Deduct	*-0.74*	
09 91 13 00-0490	SF	1 Coat Primer, Brush/Roller Work, Paint Exterior Wood Trim	1.51	
		For Oil Based Paint, Add	*0.10*	
		For Work >15' To 20' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.27*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.58*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.86*	
		For >100 To 250, Add	*0.42*	
		For >250 To 500, Add	*0.18*	
		For >2,500 To 5,000, Deduct	*-0.08*	
		For >5,000 To 10,000, Deduct	*-0.15*	
		For >10,000 To 20,000, Deduct	*-0.23*	
		For >20,000, Deduct	*-0.30*	
09 91 13 00-0491	SF	1 Coat Paint, Brush/Roller Work, Paint Exterior Wood Trim	1.68	
		For Oil Based Paint, Add	*0.11*	
		For Work >15' To 20' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.30*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.47*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.65*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.96*	
		For >100 To 250, Add	*0.46*	
		For >250 To 500, Add	*0.20*	
		For >2,500 To 5,000, Deduct	*-0.08*	
		For >5,000 To 10,000, Deduct	*-0.17*	
		For >10,000 To 20,000, Deduct	*-0.25*	
		For >20,000, Deduct	*-0.34*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 13 00-0492	SF	2 Coats Paint, Brush/Roller Work, Paint Exterior Wood Trim	3.14	
		For Oil Based Paint, Add	*0.21*	
		For Work >15' To 20' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.54*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.86*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.18*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.76*	
		For >100 To 250, Add	*0.85*	
		For >250 To 500, Add	*0.37*	
		For >2,500 To 5,000, Deduct	*-0.16*	
		For >5,000 To 10,000, Deduct	*-0.31*	
		For >10,000 To 20,000, Deduct	*-0.47*	
		For >20,000, Deduct	*-0.63*	
09 91 13 00-0493	SF	1 Coat Primer, Sprayed, Paint Exterior Wood Trim	1.28	
		For Oil Based Paint, Add	*0.09*	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.29*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.40*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.63*	
		For >100 To 250, Add	*0.31*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.19*	
		For >20,000, Deduct	*-0.26*	
09 91 13 00-0494	SF	1 Coat Paint, Sprayed, Paint Exterior Wood Trim	1.43	
		For Oil Based Paint, Add	*0.10*	
		For Work >15' To 20' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.35*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.48*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.74*	
		For >100 To 250, Add	*0.36*	
		For >250 To 500, Add	*0.16*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.14*	
		For >10,000 To 20,000, Deduct	*-0.21*	
		For >20,000, Deduct	*-0.29*	
09 91 13 00-0495	SF	2 Coats Paint, Sprayed, Paint Exterior Wood Trim	2.70	
		For Oil Based Paint, Add	*0.19*	
		For Work >15' To 20' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.40*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.64*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.88*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.37*	
		For >100 To 250, Add	*0.67*	
		For >250 To 500, Add	*0.30*	
		For >2,500 To 5,000, Deduct	*-0.14*	
		For >5,000 To 10,000, Deduct	*-0.27*	
		For >10,000 To 20,000, Deduct	*-0.41*	
		For >20,000, Deduct	*-0.54*	

09 91 13 00-0496 Paint Exterior Miscellaneous Metal Surfaces *(09 91 13)*

09 91 13 00-0497	SF	1 Coat Alkyd Anticorrosive Metal Primer, Brush/Roller Work, Paint Exterior Miscellaneous Metal Surfaces	1.57	
		For Epoxy Paint, Add	*0.20*	
		For Electrostatic Painting, Add	*0.22*	
09 91 13 00-0498	SF	1 Coat Alkyd Enamel Paint, Brush/Roller Work, Paint Exterior Miscellaneous Metal Surfaces	1.44	
		For Epoxy Paint, Add	*0.15*	
		For Electrostatic Painting, Add	*0.18*	
09 91 13 00-0499	SF	2 Coats Alkyd Enamel Paint, Brush/Roller Work, Paint Exterior Miscellaneous Metal Surfaces	2.90	
		For Epoxy Paint, Add	*0.32*	
		For Electrostatic Painting, Add	*0.38*	

09 91 23 Interior Painting *(09 91)*

Note: Acrylic latex paint unless otherwise stated. VOC compliant in all regulated areas, review specifications for levels. Paint tasks covers all paint sheens: flat, eggshell, satin, semi-gloss, or gloss. See CSI section 09 91 13 00-0326 for additional interior materials.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0001		Paint Interior Walls *(09 91 23)*		
09 91 23 00-0002		Paint Interior Brick Walls *(09 91 23 00-0001)*		
09 91 23 00-0003	LF	1 Coat Paint, Cut-in Brush Work, Paint Interior Brick Walls	0.22	
		For Work >15' To 20' Above Floor, Add	*0.03*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.05*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.07*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.14*	
		For >100 To 250, Add	*0.07*	
		For >250 To 500, Add	*0.03*	
		For >2,500 To 5,000, Deduct	*-0.01*	
		For >5,000 To 10,000, Deduct	*-0.02*	
		For >10,000 To 20,000, Deduct	*-0.03*	
		For >20,000, Deduct	*-0.04*	
09 91 23 00-0004	SF	1 Coat Filler, Brush Work, Paint Interior Brick Walls	1.15	
		For Oil Based Paint, Add	*0.07*	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.37*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.51*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.73*	
		For >100 To 250, Add	*0.35*	
		For >250 To 500, Add	*0.15*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.23*	
09 91 23 00-0005	SF	1 Coat Paint, Brush Work, Paint Interior Brick Walls	1.33	
		For Oil Based Paint, Add	*0.08*	
		For Work >15' To 20' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.27*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.43*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.59*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.84*	
		For >100 To 250, Add	*0.40*	
		For >250 To 500, Add	*0.17*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.20*	
		For >20,000, Deduct	*-0.27*	
09 91 23 00-0006	SF	2 Coat Paint, Brush Work, Paint Interior Brick Walls	2.37	
		For Oil Based Paint, Add	*0.14*	
		For Work >15' To 20' Above Floor, Add	*0.28*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.46*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.74*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.02*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.47*	
		For >100 To 250, Add	*0.70*	
		For >250 To 500, Add	*0.30*	
		For >2,500 To 5,000, Deduct	*-0.12*	
		For >5,000 To 10,000, Deduct	*-0.24*	
		For >10,000 To 20,000, Deduct	*-0.36*	
		For >20,000, Deduct	*-0.47*	
09 91 23 00-0007	SF	1 Coat Filler, Brush/Roller Work, Paint Interior Brick Walls	0.94	
		For Oil Based Paint, Add	*0.06*	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.29*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.40*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.57*	
		For >100 To 250, Add	*0.27*	
		For >250 To 500, Add	*0.12*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.14*	
		For >20,000, Deduct	*-0.19*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0008	SF	1 Coat Paint, Brush/Roller Work, Paint Interior Brick Walls	1.18	
		For Oil Based Paint, Add	*0.08*	
		For Work >15' To 20' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.34*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.46*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.68*	
		For >100 To 250, Add	*0.33*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.18*	
		For >20,000, Deduct	*-0.24*	
09 91 23 00-0009	SF	2 Coats Paint, Brush/Roller Work, Paint Interior Brick Walls	2.03	
		For Oil Based Paint, Add	*0.13*	
		For Work >15' To 20' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.57*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.79*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.16*	
		For >100 To 250, Add	*0.56*	
		For >250 To 500, Add	*0.24*	
		For >2,500 To 5,000, Deduct	*-0.10*	
		For >5,000 To 10,000, Deduct	*-0.20*	
		For >10,000 To 20,000, Deduct	*-0.30*	
		For >20,000, Deduct	*-0.41*	
09 91 23 00-0010	SF	1 Coat Filler, Sprayed, Paint Interior Brick Walls	0.85	
		For Oil Based Paint, Add	*0.06*	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.48*	
		For >100 To 250, Add	*0.23*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.17*	
09 91 23 00-0011	SF	1 Coat Paint, Sprayed, Paint Interior Brick Walls	0.95	
		For Oil Based Paint, Add	*0.07*	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.31*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.48*	
		For >100 To 250, Add	*0.24*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.14*	
		For >20,000, Deduct	*-0.19*	
09 91 23 00-0012	SF	2 Coats Paint, Sprayed, Paint Interior Brick Walls	1.62	
		For Oil Based Paint, Add	*0.11*	
		For Work >15' To 20' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.25*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.39*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.54*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.83*	
		For >100 To 250, Add	*0.41*	
		For >250 To 500, Add	*0.18*	
		For >2,500 To 5,000, Deduct	*-0.08*	
		For >5,000 To 10,000, Deduct	*-0.16*	
		For >10,000 To 20,000, Deduct	*-0.24*	
		For >20,000, Deduct	*-0.32*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0013	SF	1 Coat Bonding Agent, Brush Work, Paint Interior Brick Walls	1.20	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.37*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.51*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.74*	
		For >100 To 250, Add	*0.35*	
		For >250 To 500, Add	*0.15*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.18*	
		For >20,000, Deduct	*-0.24*	
09 91 23 00-0014	SF	1 Coat Bonding Agent, Brush/Roller Work, Paint Interior Brick Walls	0.99	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.29*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.40*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.58*	
		For >100 To 250, Add	*0.28*	
		For >250 To 500, Add	*0.12*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.15*	
		For >20,000, Deduct	*-0.20*	
09 91 23 00-0015	SF	1 Coat Bonding Agent, Sprayed, Paint Interior Brick Walls	0.90	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.49*	
		For >100 To 250, Add	*0.24*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.14*	
		For >20,000, Deduct	*-0.18*	

09 91 23 00-0016 Paint Interior Concrete Walls *(09 91 23 00-0001)*

09 91 23 00-0017	SF	1 Coat Filler, Brush Work, Paint Interior Concrete Walls	0.98	
		For Oil Based Paint, Add	*0.06*	
		For Epoxy Paint, Add	*0.11*	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.43*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.62*	
		For >100 To 250, Add	*0.30*	
		For >250 To 500, Add	*0.13*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.15*	
		For >20,000, Deduct	*-0.20*	
09 91 23 00-0018	SF	1 Coat Paint, Brush Work, Paint Interior Concrete Walls	1.06	
		For Oil Based Paint, Add	*0.06*	
		For Epoxy Paint, Add	*0.10*	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.50*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.71*	
		For >100 To 250, Add	*0.33*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.16*	
		For >20,000, Deduct	*-0.21*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0019	SF	2 Coats Paint, Brush Work, Paint Interior Concrete Walls	1.95	
		For Oil Based Paint, Add	*0.11*	
		For Epoxy Paint, Add	*0.17*	
		For Work >15' To 20' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.43*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.68*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.94*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.31*	
		For >100 To 250, Add	*0.62*	
		For >250 To 500, Add	*0.27*	
		For >2,500 To 5,000, Deduct	*-0.10*	
		For >5,000 To 10,000, Deduct	*-0.20*	
		For >10,000 To 20,000, Deduct	*-0.29*	
		For >20,000, Deduct	*-0.39*	
09 91 23 00-0020	SF	1 Coat Filler, Brush/Roller Work, Paint Interior Concrete Walls	0.80	
		For Oil Based Paint, Add	*0.05*	
		For Epoxy Paint, Add	*0.10*	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.34*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.49*	
		For >100 To 250, Add	*0.23*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.08*	
		For >10,000 To 20,000, Deduct	*-0.12*	
		For >20,000, Deduct	*-0.16*	
09 91 23 00-0021	SF	1 Coat Paint, Brush/Roller Work, Paint Interior Concrete Walls	0.89	
		For Oil Based Paint, Add	*0.05*	
		For Epoxy Paint, Add	*0.09*	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.19*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.30*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.41*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.58*	
		For >100 To 250, Add	*0.27*	
		For >250 To 500, Add	*0.12*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.18*	
09 91 23 00-0022	SF	2 Coats Paint, Brush/Roller Work, Paint Interior Concrete Walls	1.64	
		For Oil Based Paint, Add	*0.10*	
		For Epoxy Paint, Add	*0.17*	
		For Work >15' To 20' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.34*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.54*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.74*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.05*	
		For >100 To 250, Add	*0.50*	
		For >250 To 500, Add	*0.22*	
		For >2,500 To 5,000, Deduct	*-0.08*	
		For >5,000 To 10,000, Deduct	*-0.16*	
		For >10,000 To 20,000, Deduct	*-0.25*	
		For >20,000, Deduct	*-0.33*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0023	SF	1 Coat Filler, Sprayed, Paint Interior Concrete Walls	0.68	
		For Oil Based Paint, Add	*0.05*	
		For Epoxy Paint, Add	*0.10*	
		For Work >15' To 20' Above Floor, Add	*0.07*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.25*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.38*	
		For >100 To 250, Add	*0.18*	
		For >250 To 500, Add	*0.08*	
		For >2,500 To 5,000, Deduct	*-0.03*	
		For >5,000 To 10,000, Deduct	*-0.07*	
		For >10,000 To 20,000, Deduct	*-0.10*	
		For >20,000, Deduct	*-0.14*	
09 91 23 00-0024	SF	1 Coat Paint, Sprayed, Paint Interior Concrete Walls	0.78	
		For Oil Based Paint, Add	*0.05*	
		For Epoxy Paint, Add	*0.10*	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.47*	
		For >100 To 250, Add	*0.23*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.08*	
		For >10,000 To 20,000, Deduct	*-0.12*	
		For >20,000, Deduct	*-0.16*	
09 91 23 00-0025	SF	2 Coats Paint, Sprayed, Paint Interior Concrete Walls	1.25	
		For Oil Based Paint, Add	*0.08*	
		For Epoxy Paint, Add	*0.18*	
		For Work >15' To 20' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.35*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.48*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.71*	
		For >100 To 250, Add	*0.34*	
		For >250 To 500, Add	*0.15*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.19*	
		For >20,000, Deduct	*-0.25*	
09 91 23 00-0026	SF	1 Coat Bonding Agent, Brush Work, Paint Interior Concrete Walls	1.01	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.43*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.63*	
		For >100 To 250, Add	*0.30*	
		For >250 To 500, Add	*0.13*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.15*	
		For >20,000, Deduct	*-0.20*	
09 91 23 00-0027	SF	1 Coat Bonding Agent, Brush/Roller Work, Paint Interior Concrete Walls	0.83	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.34*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.49*	
		For >100 To 250, Add	*0.24*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.08*	
		For >10,000 To 20,000, Deduct	*-0.12*	
		For >20,000, Deduct	*-0.17*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0028	SF	1 Coat Bonding Agent, Sprayed, Paint Interior Concrete Walls	0.73	
		For Work >15' To 20' Above Floor, Add	*0.07*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.25*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.39*	
		For >100 To 250, Add	*0.19*	
		For >250 To 500, Add	*0.08*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.07*	
		For >10,000 To 20,000, Deduct	*-0.11*	
		For >20,000, Deduct	*-0.15*	
09 91 23 00-0029	LF	1 Coat Paint, Cut-in Brush Work, Paint Interior Concrete Walls	0.17	
		For Work >15' To 20' Above Floor, Add	*0.02*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.04*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.06*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.08*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.12*	
		For >100 To 250, Add	*0.05*	
		For >250 To 500, Add	*0.02*	
		For >2,500 To 5,000, Deduct	*-0.01*	
		For >5,000 To 10,000, Deduct	*-0.02*	
		For >10,000 To 20,000, Deduct	*-0.03*	
		For >20,000, Deduct	*-0.03*	

09 91 23 00-0030 Paint Interior Concrete Block Walls *(09 91 23 00-0001)*

09 91 23 00-0031 Paint Interior Concrete Block Walls, Epoxy Paint *(09 91 23 00-0030)*

09 91 23 00-0032	LF	1 Coat Epoxy Paint, Cut-in Brush Work, Paint Interior Concrete Block Walls	0.54	
		For Work >15' To 20' Above Floor, Add	*0.03*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.05*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.08*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.20*	
		For >100 To 250, Add	*0.10*	
		For >250 To 500, Add	*0.05*	
		For >2,500 To 5,000, Deduct	*-0.03*	
		For >5,000 To 10,000, Deduct	*-0.05*	
		For >10,000 To 20,000, Deduct	*-0.08*	
		For >20,000, Deduct	*-0.11*	
09 91 23 00-0033	SF	1 Coat Epoxy Filler, Brush Work, Paint Interior Concrete Block Walls	1.37	
		For Work >15' To 20' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.41*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.57*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.82*	
		For >100 To 250, Add	*0.39*	
		For >250 To 500, Add	*0.17*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.14*	
		For >10,000 To 20,000, Deduct	*-0.21*	
		For >20,000, Deduct	*-0.27*	
09 91 23 00-0034	SF	1 Coat Epoxy Paint, Brush Work, Paint Interior Concrete Block Walls	1.58	
		For Work >15' To 20' Above Floor, Add	*0.19*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.31*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.50*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.68*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.98*	
		For >100 To 250, Add	*0.47*	
		For >250 To 500, Add	*0.20*	
		For >2,500 To 5,000, Deduct	*-0.08*	
		For >5,000 To 10,000, Deduct	*-0.16*	
		For >10,000 To 20,000, Deduct	*-0.24*	
		For >20,000, Deduct	*-0.32*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0035	SF	2 Coats Epoxy Paint, Brush Work, Paint Interior Concrete Block Walls	2.82	
		For Work >15' To 20' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.54*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.86*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.18*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.71*	
		For >100 To 250, Add	*0.82*	
		For >250 To 500, Add	*0.36*	
		For >2,500 To 5,000, Deduct	*-0.14*	
		For >5,000 To 10,000, Deduct	*-0.28*	
		For >10,000 To 20,000, Deduct	*-0.42*	
		For >20,000, Deduct	*-0.56*	
09 91 23 00-0036	SF	1 Coat Epoxy Filler, Brush/Roller Work, Paint Interior Concrete Block Walls	1.13	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.43*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.64*	
		For >100 To 250, Add	*0.31*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.23*	
09 91 23 00-0037	SF	1 Coat Epoxy Paint, Brush/Roller Work, Paint Interior Concrete Block Walls	1.25	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.50*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.73*	
		For >100 To 250, Add	*0.35*	
		For >250 To 500, Add	*0.15*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.19*	
		For >20,000, Deduct	*-0.25*	
09 91 23 00-0038	SF	2 Coats Epoxy Paint, Brush/Roller Work, Paint Interior Concrete Block Walls	2.35	
		For Work >15' To 20' Above Floor, Add	*0.25*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.67*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.92*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.35*	
		For >100 To 250, Add	*0.65*	
		For >250 To 500, Add	*0.28*	
		For >2,500 To 5,000, Deduct	*-0.12*	
		For >5,000 To 10,000, Deduct	*-0.24*	
		For >10,000 To 20,000, Deduct	*-0.35*	
		For >20,000, Deduct	*-0.47*	
09 91 23 00-0039	SF	1 Coat Epoxy Filler, Sprayed, Paint Interior Concrete Block Walls	0.94	
		For Work >15' To 20' Above Floor, Add	*0.08*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.29*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.46*	
		For >100 To 250, Add	*0.23*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.14*	
		For >20,000, Deduct	*-0.19*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0040	SF	1 Coat Epoxy Paint, Sprayed, Paint Interior Concrete Block Walls	1.14	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.29*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.40*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.61*	
		For >100 To 250, Add	*0.30*	
		For >250 To 500, Add	*0.13*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.23*	
09 91 23 00-0041	SF	2 Coats Epoxy Paint, Sprayed, Paint Interior Concrete Block Walls	2.07	
		For Work >15' To 20' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.30*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.48*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.67*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.04*	
		For >100 To 250, Add	*0.51*	
		For >250 To 500, Add	*0.22*	
		For >2,500 To 5,000, Deduct	*-0.10*	
		For >5,000 To 10,000, Deduct	*-0.21*	
		For >10,000 To 20,000, Deduct	*-0.31*	
		For >20,000, Deduct	*-0.41*	

09 91 23 00-0042 Paint Interior Concrete Block Walls, Acrylic Latex Paint *(09 91 23 00-0030)*

09 91 23 00-0043	LF	1 Coat Paint, Cut-in Brush Work, Paint Interior Concrete Block Walls	0.25	
		For Oil Based Paint, Add	*0.02*	
		For Work >15' To 20' Above Floor, Add	*0.03*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.05*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.08*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.16*	
		For >100 To 250, Add	*0.08*	
		For >250 To 500, Add	*0.03*	
		For >2,500 To 5,000, Deduct	*-0.01*	
		For >5,000 To 10,000, Deduct	*-0.03*	
		For >10,000 To 20,000, Deduct	*-0.04*	
		For >20,000, Deduct	*-0.05*	
09 91 23 00-0044	SF	1 Coat Filler, Brush Work, Paint Interior Concrete Block Walls	1.25	
		For Oil Based Paint, Add	*0.07*	
		For Work >15' To 20' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.41*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.57*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.81*	
		For >100 To 250, Add	*0.38*	
		For >250 To 500, Add	*0.17*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.19*	
		For >20,000, Deduct	*-0.25*	
09 91 23 00-0045	SF	1 Coat Paint, Brush Work, Paint Interior Concrete Block Walls	1.50	
		For Oil Based Paint, Add	*0.09*	
		For Work >15' To 20' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.30*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.48*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.66*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.95*	
		For >100 To 250, Add	*0.45*	
		For >250 To 500, Add	*0.20*	
		For >2,500 To 5,000, Deduct	*-0.08*	
		For >5,000 To 10,000, Deduct	*-0.15*	
		For >10,000 To 20,000, Deduct	*-0.23*	
		For >20,000, Deduct	*-0.30*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0046	SF	2 Coats Paint, Brush Work, Paint Interior Concrete Block Walls	2.72	
		For Oil Based Paint, Add	*0.17*	
		For Work >15' To 20' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.53*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.85*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.17*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.68*	
		For >100 To 250, Add	*0.80*	
		For >250 To 500, Add	*0.35*	
		For >2,500 To 5,000, Deduct	*-0.14*	
		For >5,000 To 10,000, Deduct	*-0.27*	
		For >10,000 To 20,000, Deduct	*-0.41*	
		For >20,000, Deduct	*-0.54*	
09 91 23 00-0047	SF	1 Coat Texture Paint, Brush Work, Paint Interior Concrete Block Walls	1.66	
		For Oil Based Paint, Add	*0.10*	
		For Work >15' To 20' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.53*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.73*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.04*	
		For >100 To 250, Add	*0.50*	
		For >250 To 500, Add	*0.22*	
		For >2,500 To 5,000, Deduct	*-0.08*	
		For >5,000 To 10,000, Deduct	*-0.17*	
		For >10,000 To 20,000, Deduct	*-0.25*	
		For >20,000, Deduct	*-0.33*	
09 91 23 00-0048	SF	1 Coat Filler, Brush/Roller Work, Paint Interior Concrete Block Walls	1.06	
		For Oil Based Paint, Add	*0.06*	
		For Work >15' To 20' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.34*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.46*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.66*	
		For >100 To 250, Add	*0.32*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.16*	
		For >20,000, Deduct	*-0.21*	
09 91 23 00-0049	SF	1 Coat Paint, Brush/Roller Work, Paint Interior Concrete Block Walls	1.27	
		For Oil Based Paint, Add	*0.08*	
		For Work >15' To 20' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.39*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.53*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.77*	
		For >100 To 250, Add	*0.37*	
		For >250 To 500, Add	*0.16*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.19*	
		For >20,000, Deduct	*-0.25*	
09 91 23 00-0050	SF	2 Coats Paint, Brush/Roller Work, Paint Interior Concrete Block Walls	2.27	
		For Oil Based Paint, Add	*0.14*	
		For Work >15' To 20' Above Floor, Add	*0.25*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.67*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.92*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.34*	
		For >100 To 250, Add	*0.64*	
		For >250 To 500, Add	*0.28*	
		For >2,500 To 5,000, Deduct	*-0.11*	
		For >5,000 To 10,000, Deduct	*-0.23*	
		For >10,000 To 20,000, Deduct	*-0.34*	
		For >20,000, Deduct	*-0.45*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0051	SF	1 Coat Texture Paint, Brush/Roller Work, Paint Interior Concrete Block Walls	1.42	
		For Oil Based Paint, Add	*0.09*	
		For Work >15' To 20' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.27*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.43*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.59*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.86*	
		For >100 To 250, Add	*0.41*	
		For >250 To 500, Add	*0.18*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.14*	
		For >10,000 To 20,000, Deduct	*-0.21*	
		For >20,000, Deduct	*-0.28*	
09 91 23 00-0052	SF	1 Coat Filler, Sprayed, Paint Interior Concrete Block Walls	0.96	
		For Oil Based Paint, Add	*0.06*	
		For Work >15' To 20' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.54*	
		For >100 To 250, Add	*0.26*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.14*	
		For >20,000, Deduct	*-0.19*	
09 91 23 00-0053	SF	1 Coat Paint, Sprayed, Paint Interior Concrete Block Walls	1.11	
		For Oil Based Paint, Add	*0.07*	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.29*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.40*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.60*	
		For >100 To 250, Add	*0.29*	
		For >250 To 500, Add	*0.13*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.22*	
09 91 23 00-0054	SF	2 Coats Paint, Sprayed, Paint Interior Concrete Block Walls	1.80	
		For Oil Based Paint, Add	*0.13*	
		For Work >15' To 20' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.27*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.44*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.60*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.92*	
		For >100 To 250, Add	*0.45*	
		For >250 To 500, Add	*0.20*	
		For >2,500 To 5,000, Deduct	*-0.09*	
		For >5,000 To 10,000, Deduct	*-0.18*	
		For >10,000 To 20,000, Deduct	*-0.27*	
		For >20,000, Deduct	*-0.36*	
09 91 23 00-0055	SF	1 Coat Texture Paint, Sprayed, Paint Interior Concrete Block Walls	1.28	
		For Oil Based Paint, Add	*0.09*	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.46*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.69*	
		For >100 To 250, Add	*0.34*	
		For >250 To 500, Add	*0.15*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.19*	
		For >20,000, Deduct	*-0.26*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0056		**Paint Interior Concrete Block Walls With Bonding Agent** *(09 91 23 00-0030)*		
09 91 23 00-0057	SF	1 Coat Bonding Agent, Brush Work, Paint Interior Concrete Block Walls	1.30	
		For Work >15' To 20' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.41*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.57*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.81*	
		For >100 To 250, Add	*0.39*	
		For >250 To 500, Add	*0.17*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.20*	
		For >20,000, Deduct	*-0.26*	
09 91 23 00-0058	SF	1 Coat Bonding Agent, Brush/Roller Work, Paint Interior Concrete Block Walls	1.11	
		For Work >15' To 20' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.34*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.46*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.67*	
		For >100 To 250, Add	*0.32*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.22*	
09 91 23 00-0059	SF	1 Coat Bonding Agent, Sprayed, Paint Interior Concrete Block Walls	1.02	
		For Work >15' To 20' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.55*	
		For >100 To 250, Add	*0.27*	
		For >250 To 500, Add	*0.12*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.15*	
		For >20,000, Deduct	*-0.20*	
09 91 23 00-0060		**Paint Interior Plaster/Drywall Walls** *(09 91 23 00-0001)*		
09 91 23 00-0061		**Paint Interior Plaster/Drywall Walls** *(09 91 23 00-0060)*		
09 91 23 00-0062	LF	1 Coat Paint, Cut-in Brush Work, Paint Interior Plaster/Drywall Walls	0.17	
		For Oil Based Paint, Add	*0.01*	
		For Work >15' To 20' Above Floor, Add	*0.02*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.04*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.06*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.08*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.12*	
		For >100 To 250, Add	*0.05*	
		For >250 To 500, Add	*0.02*	
		For >2,500 To 5,000, Deduct	*-0.01*	
		For >5,000 To 10,000, Deduct	*-0.02*	
		For >10,000 To 20,000, Deduct	*-0.03*	
		For >20,000, Deduct	*-0.03*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0063	SF	1 Coat Primer, Brush Work, Paint Interior Plaster/Drywall Walls	1.03	
		For Oil Based Paint, Add	*0.06*	
		For Orange Peel Finish, Add	*0.14*	
		For Epoxy Paint, Add	*0.11*	
		For Work >15' To 20' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.34*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.46*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.66*	
		For >100 To 250, Add	*0.31*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.15*	
		For >20,000, Deduct	*-0.21*	
09 91 23 00-0064	SF	1 Coat Paint, Brush Work, Paint Interior Plaster/Drywall Walls	1.08	
		For Oil Based Paint, Add	*0.06*	
		For Orange Peel Finish, Add	*0.15*	
		For Epoxy Paint, Add	*0.10*	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.37*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.51*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.72*	
		For >100 To 250, Add	*0.34*	
		For >250 To 500, Add	*0.15*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.16*	
		For >20,000, Deduct	*-0.22*	
09 91 23 00-0065	SF	2 Coats Paint, Brush Work, Paint Interior Plaster/Drywall Walls	1.97	
		For Oil Based Paint, Add	*0.11*	
		For Orange Peel Finish, Add	*0.28*	
		For Epoxy Paint, Add	*0.19*	
		For Work >15' To 20' Above Floor, Add	*0.25*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.67*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.92*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.30*	
		For >100 To 250, Add	*0.61*	
		For >250 To 500, Add	*0.27*	
		For >2,500 To 5,000, Deduct	*-0.10*	
		For >5,000 To 10,000, Deduct	*-0.20*	
		For >10,000 To 20,000, Deduct	*-0.30*	
		For >20,000, Deduct	*-0.39*	
09 91 23 00-0066	SF	1 Coat Primer, Brush/Roller Work, Paint Interior Plaster/Drywall Walls	0.82	
		For Oil Based Paint, Add	*0.05*	
		For Orange Peel Finish, Add	*0.11*	
		For Epoxy Paint, Add	*0.10*	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.25*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.35*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.50*	
		For >100 To 250, Add	*0.24*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.08*	
		For >10,000 To 20,000, Deduct	*-0.12*	
		For >20,000, Deduct	*-0.16*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0067	SF	1 Coat Paint, Brush/Roller Work, Paint Interior Plaster/Drywall Walls	0.92	
		For Oil Based Paint, Add	*0.05*	
		For Orange Peel Finish, Add	*0.13*	
		For Epoxy Paint, Add	*0.10*	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.19*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.30*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.41*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.59*	
		For >100 To 250, Add	*0.28*	
		For >250 To 500, Add	*0.12*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.14*	
		For >20,000, Deduct	*-0.18*	
09 91 23 00-0068	SF	2 Coats Paint, Brush/Roller Work, Paint Interior Plaster/Drywall Walls	1.65	
		For Oil Based Paint, Add	*0.10*	
		For Orange Peel Finish, Add	*0.23*	
		For Epoxy Paint, Add	*0.18*	
		For Work >15' To 20' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.52*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.72*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.03*	
		For >100 To 250, Add	*0.49*	
		For >250 To 500, Add	*0.21*	
		For >2,500 To 5,000, Deduct	*-0.08*	
		For >5,000 To 10,000, Deduct	*-0.17*	
		For >10,000 To 20,000, Deduct	*-0.25*	
		For >20,000, Deduct	*-0.33*	
09 91 23 00-0069	SF	1 Coat Primer, Sprayed, Paint Interior Plaster/Drywall Walls	0.70	
		For Oil Based Paint, Add	*0.05*	
		For Epoxy Paint, Add	*0.10*	
		For Work >15' To 20' Above Floor, Add	*0.07*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.19*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.39*	
		For >100 To 250, Add	*0.19*	
		For >250 To 500, Add	*0.08*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.07*	
		For >10,000 To 20,000, Deduct	*-0.11*	
		For >20,000, Deduct	*-0.14*	
09 91 23 00-0070	SF	1 Coat Paint, Sprayed, Paint Interior Plaster/Drywall Walls	0.78	
		For Oil Based Paint, Add	*0.05*	
		For Epoxy Paint, Add	*0.10*	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.47*	
		For >100 To 250, Add	*0.23*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.08*	
		For >10,000 To 20,000, Deduct	*-0.12*	
		For >20,000, Deduct	*-0.16*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0071	SF	2 Coats Paint, Sprayed, Paint Interior Plaster/Drywall Walls	1.25	
		For Oil Based Paint, Add	*0.08*	
		For Epoxy Paint, Add	*0.18*	
		For Work >15' To 20' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.35*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.48*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.71*	
		For >100 To 250, Add	*0.34*	
		For >250 To 500, Add	*0.15*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.19*	
		For >20,000, Deduct	*-0.25*	

09 91 23 00-0072 Paint Interior Plaster/Drywall Or Masonry Walls With Polymix Multi-Color Paint *(09 91 23 00-0060)*

09 91 23 00-0073	SF	2 Tone Polymix With Base Coat, Sprayed, Paint Interior Plaster/Drywall Or Masonry Walls	2.15	
		For Work >15' To 20' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.41*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.56*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.93*	
		For >100 To 250, Add	*0.47*	
		For >250 To 500, Add	*0.21*	
		For >2,500 To 5,000, Deduct	*-0.11*	
		For >5,000 To 10,000, Deduct	*-0.22*	
		For >10,000 To 20,000, Deduct	*-0.32*	
		For >20,000, Deduct	*-0.43*	
09 91 23 00-0074	SF	3 Tone Polymix With Base Coat, Sprayed, Paint Interior Plaster/Drywall Or Masonry Walls	2.33	
		For Work >15' To 20' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.41*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.56*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.96*	
		For >100 To 250, Add	*0.49*	
		For >250 To 500, Add	*0.22*	
		For >2,500 To 5,000, Deduct	*-0.12*	
		For >5,000 To 10,000, Deduct	*-0.23*	
		For >10,000 To 20,000, Deduct	*-0.35*	
		For >20,000, Deduct	*-0.47*	
09 91 23 00-0075	SF	4 Tone Polymix With Base Coat, Sprayed, Paint Interior Plaster/Drywall Or Masonry Walls	2.52	
		For Work >15' To 20' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.41*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.56*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.99*	
		For >100 To 250, Add	*0.51*	
		For >250 To 500, Add	*0.23*	
		For >2,500 To 5,000, Deduct	*-0.13*	
		For >5,000 To 10,000, Deduct	*-0.25*	
		For >10,000 To 20,000, Deduct	*-0.38*	
		For >20,000, Deduct	*-0.50*	

09 91 23 00-0076 Paint Interior Plaster/Drywall Walls, Acoustic Texture *(09 91 23 00-0060)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0077	SF	1 Coat Primer, Sprayed, Acoustic Texture, Paint Interior Plaster/Drywall Walls	0.87	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.31*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.47*	
		For >100 To 250, Add	*0.23*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.17*	
09 91 23 00-0078	SF	1 Coat Finish, Sprayed, Acoustic Texture, Paint Interior Plaster/Drywall Walls	1.03	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.29*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.40*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.59*	
		For >100 To 250, Add	*0.29*	
		For >250 To 500, Add	*0.12*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.15*	
		For >20,000, Deduct	*-0.21*	
09 91 23 00-0079	SF	2 Coats Finish, Sprayed, Acoustic Texture, Paint Interior Plaster/Drywall Walls	1.62	
		For Work >15' To 20' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.41*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.56*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.86*	
		For >100 To 250, Add	*0.42*	
		For >250 To 500, Add	*0.18*	
		For >2,500 To 5,000, Deduct	*-0.08*	
		For >5,000 To 10,000, Deduct	*-0.16*	
		For >10,000 To 20,000, Deduct	*-0.24*	
		For >20,000, Deduct	*-0.32*	
09 91 23 00-0080	SF	Stipple Finish (Drippowder), Paint Interior Plaster/Drywall Walls	1.66	
		For Work >15' To 20' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.39*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.62*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.85*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.17*	
		For >100 To 250, Add	*0.55*	
		For >250 To 500, Add	*0.24*	
		For >2,500 To 5,000, Deduct	*-0.08*	
		For >5,000 To 10,000, Deduct	*-0.17*	
		For >10,000 To 20,000, Deduct	*-0.25*	
		For >20,000, Deduct	*-0.33*	

09 91 23 00-0081 Paint Interior Metal Walls *(09 91 23 00-0001)*

09 91 23 00-0082 Paint Interior Galvanized Walls *(09 91 23 00-0081)*

Note: Linseed oil or acrylic latex paint.

09 91 23 00-0083	SF	1 Coat Primer, Brush Work, Paint Interior Galvanized Wall Surfaces	1.32	
		For Electrostatic Painting, Add	*0.19*	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.37*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.51*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.75*	
		For >100 To 250, Add	*0.36*	
		For >250 To 500, Add	*0.16*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.20*	
		For >20,000, Deduct	*-0.26*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0084	SF	1 Coat Paint, Brush Work, Paint Interior Galvanized Wall Surfaces	1.46	
		For Electrostatic Painting, Add	*0.21*	
		For Work >15' To 20' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.27*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.58*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.86*	
		For >100 To 250, Add	*0.41*	
		For >250 To 500, Add	*0.18*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.15*	
		For >10,000 To 20,000, Deduct	*-0.22*	
		For >20,000, Deduct	*-0.29*	
09 91 23 00-0085	SF	2 Coats Paint, Brush Work, Paint Interior Galvanized Wall Surfaces	2.66	
		For Electrostatic Painting, Add	*0.39*	
		For Work >15' To 20' Above Floor, Add	*0.28*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.46*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.74*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.02*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.51*	
		For >100 To 250, Add	*0.73*	
		For >250 To 500, Add	*0.32*	
		For >2,500 To 5,000, Deduct	*-0.13*	
		For >5,000 To 10,000, Deduct	*-0.27*	
		For >10,000 To 20,000, Deduct	*-0.40*	
		For >20,000, Deduct	*-0.53*	
09 91 23 00-0086	SF	1 Coat Primer, Brush/Roller Work, Paint Interior Galvanized Walls	1.00	
		For Electrostatic Painting, Add	*0.15*	
		For Work >15' To 20' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.27*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.37*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.55*	
		For >100 To 250, Add	*0.27*	
		For >250 To 500, Add	*0.12*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.15*	
		For >20,000, Deduct	*-0.20*	
09 91 23 00-0087	SF	1 Coat Paint, Brush/Roller Work, Paint Interior Galvanized Wall	1.14	
		For Electrostatic Painting, Add	*0.17*	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.43*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.65*	
		For >100 To 250, Add	*0.31*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.23*	
09 91 23 00-0088	SF	2 Coats Paint, Brush/Roller Work, Paint Interior Galvanized Walls	2.15	
		For Electrostatic Painting, Add	*0.32*	
		For Work >15' To 20' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.37*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.58*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.80*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.20*	
		For >100 To 250, Add	*0.58*	
		For >250 To 500, Add	*0.25*	
		For >2,500 To 5,000, Deduct	*-0.11*	
		For >5,000 To 10,000, Deduct	*-0.22*	
		For >10,000 To 20,000, Deduct	*-0.32*	
		For >20,000, Deduct	*-0.43*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0089	SF	1 Coat Primer, Sprayed, Paint Interior Galvanized Walls	0.87	
		For Electrostatic Painting, Add	*0.16*	
		For Work >15' To 20' Above Floor, Add	*0.06*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.38*	
		For >100 To 250, Add	*0.19*	
		For >250 To 500, Add	*0.08*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.17*	
09 91 23 00-0090	SF	1 Coat Paint, Sprayed, Paint Interior Galvanized Walls	1.12	
		For Electrostatic Painting, Add	*0.18*	
		For Work >15' To 20' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.56*	
		For >100 To 250, Add	*0.28*	
		For >250 To 500, Add	*0.12*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.22*	
09 91 23 00-0091	SF	2 Coats Paint, Sprayed, Paint Interior Galvanized Walls	1.88	
		For Electrostatic Painting, Add	*0.33*	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.38*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.53*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.86*	
		For >100 To 250, Add	*0.43*	
		For >250 To 500, Add	*0.19*	
		For >2,500 To 5,000, Deduct	*-0.09*	
		For >5,000 To 10,000, Deduct	*-0.19*	
		For >10,000 To 20,000, Deduct	*-0.28*	
		For >20,000, Deduct	*-0.38*	

09 91 23 00-0092 Paint Interior Aluminum And Aluminum Alloy Walls *(09 91 23 00-0081)*

Note: Alkyd enamel paint.

09 91 23 00-0093	SF	1 Coat Primer, Brush Work, Paint Interior Aluminum And Aluminum Alloy Wall Surfaces	1.32	
		For Electrostatic Painting, Add	*0.19*	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.37*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.51*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.75*	
		For >100 To 250, Add	*0.36*	
		For >250 To 500, Add	*0.16*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.20*	
		For >20,000, Deduct	*-0.26*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0094	SF	1 Coat Paint, Brush Work, Paint Interior Aluminum And Aluminum Alloy Wall Surfaces	1.46	
		For Electrostatic Painting, Add	*0.21*	
		For Work >15' To 20' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.27*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.58*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.86*	
		For >100 To 250, Add	*0.41*	
		For >250 To 500, Add	*0.18*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.15*	
		For >10,000 To 20,000, Deduct	*-0.22*	
		For >20,000, Deduct	*-0.29*	
09 91 23 00-0095	SF	2 Coats Paint, Brush Work, Paint Interior Aluminum And Aluminum Alloy Wall Surfaces	2.65	
		For Electrostatic Painting, Add	*0.39*	
		For Work >15' To 20' Above Floor, Add	*0.28*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.46*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.74*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.02*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.51*	
		For >100 To 250, Add	*0.73*	
		For >250 To 500, Add	*0.32*	
		For >2,500 To 5,000, Deduct	*-0.13*	
		For >5,000 To 10,000, Deduct	*-0.27*	
		For >10,000 To 20,000, Deduct	*-0.40*	
		For >20,000, Deduct	*-0.53*	
09 91 23 00-0096	SF	1 Coat Primer, Brush/Roller Work, Paint Interior Aluminum And Aluminum Alloy Walls	1.12	
		For Electrostatic Painting, Add	*0.18*	
		For Work >15' To 20' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.56*	
		For >100 To 250, Add	*0.28*	
		For >250 To 500, Add	*0.12*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.22*	
09 91 23 00-0097	SF	1 Coat Paint, Brush/Roller Work, Paint Interior Aluminum And Aluminum Alloy Walls	1.25	
		For Electrostatic Painting, Add	*0.19*	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.43*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.66*	
		For >100 To 250, Add	*0.32*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.19*	
		For >20,000, Deduct	*-0.25*	
09 91 23 00-0098	SF	2 Coats Paint, Brush/Roller Work, Paint Interior Aluminum And Aluminum Alloy Walls	2.38	
		For Electrostatic Painting, Add	*0.38*	
		For Work >15' To 20' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.37*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.58*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.80*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.23*	
		For >100 To 250, Add	*0.60*	
		For >250 To 500, Add	*0.27*	
		For >2,500 To 5,000, Deduct	*-0.12*	
		For >5,000 To 10,000, Deduct	*-0.24*	
		For >10,000 To 20,000, Deduct	*-0.36*	
		For >20,000, Deduct	*-0.48*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0099	SF	1 Coat Primer, Sprayed, Paint Interior Aluminum And Aluminum Alloy Walls	0.95	
		For Electrostatic Painting, Add	*0.16*	
		For Work >15' To 20' Above Floor, Add	*0.07*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.27*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.44*	
		For >100 To 250, Add	*0.22*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.14*	
		For >20,000, Deduct	*-0.19*	
09 91 23 00-0100	SF	1 Coat Paint, Sprayed, Paint Interior Aluminum And Aluminum Alloy Walls	1.12	
		For Electrostatic Painting, Add	*0.18*	
		For Work >15' To 20' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.56*	
		For >100 To 250, Add	*0.28*	
		For >250 To 500, Add	*0.12*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.22*	
09 91 23 00-0101	SF	2 Coats Paint, Sprayed, Paint Interior Aluminum And Aluminum Alloy Walls	1.88	
		For Electrostatic Painting, Add	*0.33*	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.38*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.53*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.86*	
		For >100 To 250, Add	*0.43*	
		For >250 To 500, Add	*0.19*	
		For >2,500 To 5,000, Deduct	*-0.09*	
		For >5,000 To 10,000, Deduct	*-0.19*	
		For >10,000 To 20,000, Deduct	*-0.28*	
		For >20,000, Deduct	*-0.38*	

09 91 23 00-0102 Paint Interior Corrugated Metal Walls *(09 91 23 00-0081)*

09 91 23 00-0103	SF	1 Coat Primer, Sprayed, Paint Interior Corrugated Metal Walls	1.07	
		For Electrostatic Painting, Add	*0.19*	
		For Work >15' To 20' Above Floor, Add	*0.08*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.30*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.48*	
		For >100 To 250, Add	*0.24*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.16*	
		For >20,000, Deduct	*-0.21*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0104	SF	1 Coat Paint, Sprayed, Paint Interior Corrugated Metal Walls	1.40	
		For Electrostatic Painting, Add	*0.22*	
		For Work >15' To 20' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.35*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.48*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.73*	
		For >100 To 250, Add	*0.36*	
		For >250 To 500, Add	*0.16*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.14*	
		For >10,000 To 20,000, Deduct	*-0.21*	
		For >20,000, Deduct	*-0.28*	
09 91 23 00-0105	SF	2 Coats Paint, Sprayed, Paint Interior Corrugated Metal Walls	2.35	
		For Electrostatic Painting, Add	*0.39*	
		For Work >15' To 20' Above Floor, Add	*0.19*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.52*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.71*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.13*	
		For >100 To 250, Add	*0.56*	
		For >250 To 500, Add	*0.25*	
		For >2,500 To 5,000, Deduct	*-0.12*	
		For >5,000 To 10,000, Deduct	*-0.24*	
		For >10,000 To 20,000, Deduct	*-0.35*	
		For >20,000, Deduct	*-0.47*	

09 91 23 00-0106 Paint Interior Stucco Walls *(09 91 23 00-0001)*

09 91 23 00-0107	LF	1 Coat Paint, Cut-in Brush Work, Paint Interior Stucco Wall Surfaces	0.30	
		For Oil Based Paint, Add	*0.02*	
		For Work >15' To 20' Above Floor, Add	*0.04*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.07*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.20*	
		For >100 To 250, Add	*0.10*	
		For >250 To 500, Add	*0.04*	
		For >2,500 To 5,000, Deduct	*-0.02*	
		For >5,000 To 10,000, Deduct	*-0.03*	
		For >10,000 To 20,000, Deduct	*-0.05*	
		For >20,000, Deduct	*-0.06*	
09 91 23 00-0108	SF	1 Coat Primer, Brush Work, Paint Interior Stucco Wall Surfaces	1.68	
		For Oil Based Paint, Add	*0.10*	
		For Work >15' To 20' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.37*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.58*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.80*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.13*	
		For >100 To 250, Add	*0.53*	
		For >250 To 500, Add	*0.23*	
		For >2,500 To 5,000, Deduct	*-0.08*	
		For >5,000 To 10,000, Deduct	*-0.17*	
		For >10,000 To 20,000, Deduct	*-0.25*	
		For >20,000, Deduct	*-0.34*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0109	SF	1 Coat Paint, Brush Work, Paint Interior Stucco Wall Surfaces	1.85	
		For Oil Based Paint, Add	*0.11*	
		For Work >15' To 20' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.40*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.64*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.87*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.23*	
		For >100 To 250, Add	*0.58*	
		For >250 To 500, Add	*0.25*	
		For >2,500 To 5,000, Deduct	*-0.09*	
		For >5,000 To 10,000, Deduct	*-0.19*	
		For >10,000 To 20,000, Deduct	*-0.28*	
		For >20,000, Deduct	*-0.37*	
09 91 23 00-0110	SF	2 Coats Paint, Brush Work, Paint Interior Stucco Wall Surfaces	3.27	
		For Oil Based Paint, Add	*0.19*	
		For Work >15' To 20' Above Floor, Add	*0.41*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.69*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*1.10*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.51*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*2.14*	
		For >100 To 250, Add	*1.01*	
		For >250 To 500, Add	*0.44*	
		For >2,500 To 5,000, Deduct	*-0.16*	
		For >5,000 To 10,000, Deduct	*-0.33*	
		For >10,000 To 20,000, Deduct	*-0.49*	
		For >20,000, Deduct	*-0.65*	
09 91 23 00-0111	SF	1 Coat Primer, Brush/Roller Work, Paint Interior Stucco Wall Surfaces	1.27	
		For Oil Based Paint, Add	*0.07*	
		For Work >15' To 20' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.58*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.82*	
		For >100 To 250, Add	*0.39*	
		For >250 To 500, Add	*0.17*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.19*	
		For >20,000, Deduct	*-0.25*	
09 91 23 00-0112	SF	1 Coat Paint, Brush/Roller Work, Paint Interior Stucco Wall Surfaces	1.45	
		For Oil Based Paint, Add	*0.09*	
		For Work >15' To 20' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.30*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.48*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.65*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.93*	
		For >100 To 250, Add	*0.44*	
		For >250 To 500, Add	*0.19*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.15*	
		For >10,000 To 20,000, Deduct	*-0.22*	
		For >20,000, Deduct	*-0.29*	
09 91 23 00-0113	SF	2 Coats Paint, Brush/Roller Work, Paint Interior Stucco Wall Surfaces	2.65	
		For Oil Based Paint, Add	*0.16*	
		For Work >15' To 20' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.53*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.85*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.17*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.68*	
		For >100 To 250, Add	*0.80*	
		For >250 To 500, Add	*0.35*	
		For >2,500 To 5,000, Deduct	*-0.13*	
		For >5,000 To 10,000, Deduct	*-0.27*	
		For >10,000 To 20,000, Deduct	*-0.40*	
		For >20,000, Deduct	*-0.53*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0114	SF	1 Coat Primer, Sprayed, Paint Interior Stucco Wall Surfaces	0.94	
		For Oil Based Paint, Add	*0.06*	
		For Work >15' To 20' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.27*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.37*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.55*	
		For >100 To 250, Add	*0.26*	
		For >250 To 500, Add	*0.12*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.14*	
		For >20,000, Deduct	*-0.19*	
09 91 23 00-0115	SF	1 Coat Paint, Sprayed, Paint Interior Stucco Wall Surfaces	1.16	
		For Oil Based Paint, Add	*0.08*	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.45*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.67*	
		For >100 To 250, Add	*0.32*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.23*	
09 91 23 00-0116	SF	2 Coats Paint, Sprayed, Paint Interior Stucco Wall Surfaces	2.23	
		For Oil Based Paint, Add	*0.14*	
		For Work >15' To 20' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.41*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.65*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.90*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.31*	
		For >100 To 250, Add	*0.63*	
		For >250 To 500, Add	*0.27*	
		For >2,500 To 5,000, Deduct	*-0.11*	
		For >5,000 To 10,000, Deduct	*-0.22*	
		For >10,000 To 20,000, Deduct	*-0.33*	
		For >20,000, Deduct	*-0.45*	

09 91 23 00-0117 Paint Interior Wood Walls *(09 91 23 00-0001)*

09 91 23 00-0118 Interior Wood Walls *(09 91 23 00-0117)*

09 91 23 00-0119	LF	1 Coat Paint, Cut-in Brush Work, Paint Interior Wood Wall Surfaces	0.21	
		For Oil Based Paint, Add	*0.01*	
		For Work >15' To 20' Above Floor, Add	*0.03*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.05*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.07*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.14*	
		For >100 To 250, Add	*0.07*	
		For >250 To 500, Add	*0.03*	
		For >2,500 To 5,000, Deduct	*-0.01*	
		For >5,000 To 10,000, Deduct	*-0.02*	
		For >10,000 To 20,000, Deduct	*-0.03*	
		For >20,000, Deduct	*-0.04*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0120	SF	1 Coat Paint, Brush Work, Paint Interior Wood Wall Surfaces	1.26	
		For Oil Based Paint, Add	*0.07*	
		For Work >15' To 20' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.27*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.43*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.59*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.83*	
		For >100 To 250, Add	*0.39*	
		For >250 To 500, Add	*0.17*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.19*	
		For >20,000, Deduct	*-0.25*	
09 91 23 00-0121	SF	2 Coats Paint, Brush Work, Paint Interior Wood Wall Surfaces	2.31	
		For Oil Based Paint, Add	*0.13*	
		For Work >15' To 20' Above Floor, Add	*0.29*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.48*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.77*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.06*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.50*	
		For >100 To 250, Add	*0.71*	
		For >250 To 500, Add	*0.31*	
		For >2,500 To 5,000, Deduct	*-0.12*	
		For >5,000 To 10,000, Deduct	*-0.23*	
		For >10,000 To 20,000, Deduct	*-0.35*	
		For >20,000, Deduct	*-0.46*	
09 91 23 00-0122	SF	1 Coat Primer, Brush/Roller Work, Paint Interior Wood Walls	0.90	
		For Oil Based Paint, Add	*0.05*	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.28*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.39*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.56*	
		For >100 To 250, Add	*0.27*	
		For >250 To 500, Add	*0.12*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.14*	
		For >20,000, Deduct	*-0.18*	
09 91 23 00-0123	SF	1 Coat Paint, Brush/Roller Work, Paint Interior Wood Walls	1.02	
		For Oil Based Paint, Add	*0.06*	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.46*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.65*	
		For >100 To 250, Add	*0.31*	
		For >250 To 500, Add	*0.13*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.15*	
		For >20,000, Deduct	*-0.20*	
09 91 23 00-0124	SF	2 Coats Paint, Brush/Roller Work, Paint Interior Wood Walls	1.81	
		For Oil Based Paint, Add	*0.11*	
		For Work >15' To 20' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.57*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.79*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.13*	
		For >100 To 250, Add	*0.54*	
		For >250 To 500, Add	*0.23*	
		For >2,500 To 5,000, Deduct	*-0.09*	
		For >5,000 To 10,000, Deduct	*-0.18*	
		For >10,000 To 20,000, Deduct	*-0.27*	
		For >20,000, Deduct	*-0.36*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0125	SF	1 Coat Primer, Sprayed, Paint Interior Wood Walls	0.66	
		For Oil Based Paint, Add	*0.04*	
		For Work >15' To 20' Above Floor, Add	*0.07*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.36*	
		For >100 To 250, Add	*0.18*	
		For >250 To 500, Add	*0.08*	
		For >2,500 To 5,000, Deduct	*-0.03*	
		For >5,000 To 10,000, Deduct	*-0.07*	
		For >10,000 To 20,000, Deduct	*-0.10*	
		For >20,000, Deduct	*-0.13*	
09 91 23 00-0126	SF	1 Coat Paint, Sprayed, Paint Interior Wood Walls	0.85	
		For Oil Based Paint, Add	*0.06*	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.48*	
		For >100 To 250, Add	*0.23*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.17*	
09 91 23 00-0127	SF	2 Coats Paint, Sprayed, Paint Interior Wood Walls	1.55	
		For Oil Based Paint, Add	*0.10*	
		For Work >15' To 20' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.41*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.57*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.85*	
		For >100 To 250, Add	*0.41*	
		For >250 To 500, Add	*0.18*	
		For >2,500 To 5,000, Deduct	*-0.08*	
		For >5,000 To 10,000, Deduct	*-0.16*	
		For >10,000 To 20,000, Deduct	*-0.23*	
		For >20,000, Deduct	*-0.31*	

09 91 23 00-0128 Paint Interior Ceilings *(09 91 23)*

09 91 23 00-0129 Paint Interior Acoustical Ceilings *(09 91 23 00-0128)*

Note: Includes grid.

09 91 23 00-0130	LF	1 Coat Paint, Cut-in Brush Work, Paint Interior Acoustical Ceiling	0.35	
		For Oil Based Paint, Add	*0.03*	
		For Work >15' To 20' Above Floor, Add	*0.03*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.05*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.08*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.17*	
		For >100 To 250, Add	*0.09*	
		For >250 To 500, Add	*0.04*	
		For >2,500 To 5,000, Deduct	*-0.02*	
		For >5,000 To 10,000, Deduct	*-0.04*	
		For >10,000 To 20,000, Deduct	*-0.05*	
		For >20,000, Deduct	*-0.07*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0131	SF	1 Coat Primer, Brush Work, Paint Interior Acoustical Ceiling	1.12	
		For Oil Based Paint, Add	*0.07*	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.37*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.51*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.73*	
		For >100 To 250, Add	*0.34*	
		For >250 To 500, Add	*0.15*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.22*	
09 91 23 00-0132	SF	1 Coat Paint, Brush Work, Paint Interior Acoustical Ceiling	1.21	
		For Oil Based Paint, Add	*0.07*	
		For Work >15' To 20' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.27*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.58*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.82*	
		For >100 To 250, Add	*0.39*	
		For >250 To 500, Add	*0.17*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.18*	
		For >20,000, Deduct	*-0.24*	
09 91 23 00-0133	SF	2 Coats Paint, Brush Work, Paint Interior Acoustical Ceiling	2.15	
		For Oil Based Paint, Add	*0.12*	
		For Work >15' To 20' Above Floor, Add	*0.28*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.46*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.74*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.02*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.43*	
		For >100 To 250, Add	*0.68*	
		For >250 To 500, Add	*0.29*	
		For >2,500 To 5,000, Deduct	*-0.11*	
		For >5,000 To 10,000, Deduct	*-0.22*	
		For >10,000 To 20,000, Deduct	*-0.32*	
		For >20,000, Deduct	*-0.43*	
09 91 23 00-0134	SF	1 Coat Primer, Brush/Roller Work, Paint Interior Acoustical Ceiling	0.96	
		For Oil Based Paint, Add	*0.06*	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.19*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.31*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.61*	
		For >100 To 250, Add	*0.29*	
		For >250 To 500, Add	*0.13*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.14*	
		For >20,000, Deduct	*-0.19*	
09 91 23 00-0135	SF	1 Coat Paint, Brush/Roller Work, Paint Interior Acoustical Ceiling	0.94	
		For Oil Based Paint, Add	*0.05*	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.43*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.62*	
		For >100 To 250, Add	*0.29*	
		For >250 To 500, Add	*0.13*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.14*	
		For >20,000, Deduct	*-0.19*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0136	SF	2 Coats Paint, Brush/Roller Work, Paint Interior Acoustical Ceiling	1.76	
		For Oil Based Paint, Add	*0.10*	
		For Work >15' To 20' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.37*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.58*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.80*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.14*	
		For >100 To 250, Add	*0.54*	
		For >250 To 500, Add	*0.23*	
		For >2,500 To 5,000, Deduct	*-0.09*	
		For >5,000 To 10,000, Deduct	*-0.18*	
		For >10,000 To 20,000, Deduct	*-0.26*	
		For >20,000, Deduct	*-0.35*	
09 91 23 00-0137	SF	1 Coat Primer, Sprayed, Paint Interior Acoustical Ceiling	0.86	
		For Oil Based Paint, Add	*0.05*	
		For Work >15' To 20' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.35*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.51*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.17*	
09 91 23 00-0138	SF	1 Coat Paint, Sprayed, Paint Interior Acoustical Ceiling	0.85	
		For Oil Based Paint, Add	*0.05*	
		For Work >15' To 20' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.52*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.17*	
09 91 23 00-0139	SF	2 Coats Paint, Sprayed, Paint Interior Acoustical Ceiling	1.35	
		For Oil Based Paint, Add	*0.09*	
		For Work >15' To 20' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.39*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.53*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.78*	
		For >100 To 250, Add	*0.38*	
		For >250 To 500, Add	*0.16*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.14*	
		For >10,000 To 20,000, Deduct	*-0.20*	
		For >20,000, Deduct	*-0.27*	

09 91 23 00-0140 Paint Interior Concrete Ceilings *(09 91 23 00-0128)*

09 91 23 00-0141	LF	1 Coat Paint, Cut-in Brush Work, Paint Interior Concrete Ceiling	0.20	
		For Work >15' To 20' Above Floor, Add	*0.03*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.05*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.07*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.14*	
		For >100 To 250, Add	*0.07*	
		For >250 To 500, Add	*0.03*	
		For >2,500 To 5,000, Deduct	*-0.01*	
		For >5,000 To 10,000, Deduct	*-0.02*	
		For >10,000 To 20,000, Deduct	*-0.03*	
		For >20,000, Deduct	*-0.04*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0142	SF	1 Coat Filler, Brush Work, Paint Interior Concrete Ceiling	1.11	
		For Oil Based Paint, Add	*0.07*	
		For Epoxy Paint, Add	*0.11*	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.37*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.51*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.72*	
		For >100 To 250, Add	*0.34*	
		For >250 To 500, Add	*0.15*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.22*	
09 91 23 00-0143	SF	1 Coat Paint, Brush Work, Paint Interior Concrete Ceiling	1.21	
		For Oil Based Paint, Add	*0.07*	
		For Epoxy Paint, Add	*0.11*	
		For Work >15' To 20' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.27*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.58*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.82*	
		For >100 To 250, Add	*0.39*	
		For >250 To 500, Add	*0.17*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.18*	
		For >20,000, Deduct	*-0.24*	
09 91 23 00-0144	SF	2 Coats Paint, Brush Work, Paint Interior Concrete Ceiling	2.15	
		For Oil Based Paint, Add	*0.12*	
		For Epoxy Paint, Add	*0.20*	
		For Work >15' To 20' Above Floor, Add	*0.28*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.46*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.74*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.02*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.43*	
		For >100 To 250, Add	*0.68*	
		For >250 To 500, Add	*0.29*	
		For >2,500 To 5,000, Deduct	*-0.11*	
		For >5,000 To 10,000, Deduct	*-0.22*	
		For >10,000 To 20,000, Deduct	*-0.32*	
		For >20,000, Deduct	*-0.43*	
09 91 23 00-0145	SF	1 Coat Filler, Brush/Roller Work, Paint Interior Concrete Ceiling	0.85	
		For Oil Based Paint, Add	*0.05*	
		For Epoxy Paint, Add	*0.10*	
		For Work >15' To 20' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.52*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.17*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0146	SF	1 Coat Paint, Brush/Roller Work, Paint Interior Concrete Ceiling	0.94	
		For Oil Based Paint, Add	*0.05*	
		For Epoxy Paint, Add	*0.09*	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.43*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.62*	
		For >100 To 250, Add	*0.29*	
		For >250 To 500, Add	*0.13*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.14*	
		For >20,000, Deduct	*-0.19*	
09 91 23 00-0147	SF	2 Coats Paint, Brush/Roller Work, Paint Interior Concrete Ceiling	1.76	
		For Oil Based Paint, Add	*0.10*	
		For Epoxy Paint, Add	*0.18*	
		For Work >15' To 20' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.37*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.58*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.80*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.14*	
		For >100 To 250, Add	*0.54*	
		For >250 To 500, Add	*0.23*	
		For >2,500 To 5,000, Deduct	*-0.09*	
		For >5,000 To 10,000, Deduct	*-0.18*	
		For >10,000 To 20,000, Deduct	*-0.26*	
		For >20,000, Deduct	*-0.35*	
09 91 23 00-0148	SF	1 Coat Filler, Sprayed, Paint Interior Concrete Ceiling	0.82	
		For Oil Based Paint, Add	*0.05*	
		For Epoxy Paint, Add	*0.11*	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.48*	
		For >100 To 250, Add	*0.23*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.08*	
		For >10,000 To 20,000, Deduct	*-0.12*	
		For >20,000, Deduct	*-0.16*	
09 91 23 00-0149	SF	1 Coat Paint, Sprayed, Paint Interior Concrete Ceiling	0.85	
		For Oil Based Paint, Add	*0.05*	
		For Epoxy Paint, Add	*0.10*	
		For Work >15' To 20' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.52*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.17*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0150	SF	2 Coats Paint, Sprayed, Paint Interior Concrete Ceiling	1.34	
		For Oil Based Paint, Add	*0.09*	
		For Epoxy Paint, Add	*0.18*	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.38*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.53*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.78*	
		For >100 To 250, Add	*0.37*	
		For >250 To 500, Add	*0.16*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.20*	
		For >20,000, Deduct	*-0.27*	
09 91 23 00-0151	SF	1 Coat Bonding Agent, Brush Work, Paint Interior Concrete Ceiling	1.14	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.37*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.51*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.72*	
		For >100 To 250, Add	*0.34*	
		For >250 To 500, Add	*0.15*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.23*	
09 91 23 00-0152	SF	1 Coat Bonding Agent, Brush/Roller, Paint Interior Concrete Ceiling	0.88	
		For Work >15' To 20' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.53*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.18*	
09 91 23 00-0153	SF	1 Coat Bonding Agent, Sprayed, Paint Interior Concrete Ceiling	0.87	
		For Work >15' To 20' Above Floor, Add	*0.09*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.49*	
		For >100 To 250, Add	*0.24*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.17*	

09 91 23 00-0154 Paint Interior Drywall/Plaster Ceilings *(09 91 23 00-0128)*

09 91 23 00-0155	LF	1 Coat Paint, Cut-in Brush Work, Paint Interior Drywall/Plaster Ceiling	0.20	
		For Epoxy Paint, Add	*0.02*	
		For Oil Based Paint, Add	*0.01*	
		For Work >15' To 20' Above Floor, Add	*0.03*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.05*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.07*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.14*	
		For >100 To 250, Add	*0.07*	
		For >250 To 500, Add	*0.03*	
		For >2,500 To 5,000, Deduct	*-0.01*	
		For >5,000 To 10,000, Deduct	*-0.02*	
		For >10,000 To 20,000, Deduct	*-0.03*	
		For >20,000, Deduct	*-0.04*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0156	SF	1 Coat Primer, Brush Work, Pain Interior Drywall/Plaster Ceiling	1.12	
		For Epoxy Paint, Add	*0.11*	
		For Oil Based Paint, Add	*0.07*	
		For Orange Peel Finish, Add	*0.16*	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.37*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.51*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.73*	
		For >100 To 250, Add	*0.34*	
		For >250 To 500, Add	*0.15*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.22*	
09 91 23 00-0157	SF	1 Coat Paint, Brush Work, Paint Interior Drywall/Plaster Ceiling	1.21	
		For Epoxy Paint, Add	*0.11*	
		For Oil Based Paint, Add	*0.07*	
		For Orange Peel Finish, Add	*0.17*	
		For Work >15' To 20' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.27*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.58*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.82*	
		For >100 To 250, Add	*0.39*	
		For >250 To 500, Add	*0.17*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.18*	
		For >20,000, Deduct	*-0.24*	
09 91 23 00-0158	SF	2 Coats Paint, Brush Work, Paint Interior Drywall/Plaster Ceiling	2.15	
		For Epoxy Paint, Add	*0.20*	
		For Oil Based Paint, Add	*0.12*	
		For Orange Peel Finish, Add	*0.30*	
		For Work >15' To 20' Above Floor, Add	*0.28*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.46*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.74*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.02*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.43*	
		For >100 To 250, Add	*0.68*	
		For >250 To 500, Add	*0.29*	
		For >2,500 To 5,000, Deduct	*-0.11*	
		For >5,000 To 10,000, Deduct	*-0.22*	
		For >10,000 To 20,000, Deduct	*-0.32*	
		For >20,000, Deduct	*-0.43*	
09 91 23 00-0159	SF	1 Coat Primer, Brush/Roller Work, Paint Interior Drywall/Plaster Ceiling	0.96	
		For Epoxy Paint, Add	*0.11*	
		For Oil Based Paint, Add	*0.06*	
		For Orange Peel Finish, Add	*0.13*	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.19*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.31*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.61*	
		For >100 To 250, Add	*0.29*	
		For >250 To 500, Add	*0.13*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.14*	
		For >20,000, Deduct	*-0.19*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0160	SF	1 Coat Paint, Brush/Roller Work, Paint Interior Drywall/Plaster Ceiling	0.94	
		For Epoxy Paint, Add	*0.09*	
		For Oil Based Paint, Add	*0.05*	
		For Orange Peel Finish, Add	*0.13*	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.43*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.62*	
		For >100 To 250, Add	*0.29*	
		For >250 To 500, Add	*0.13*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.14*	
		For >20,000, Deduct	*-0.19*	
09 91 23 00-0161	SF	2 Coats Paint, Brush/Roller Work, Paint Interior Drywall/Plaster Ceiling	1.76	
		For Epoxy Paint, Add	*0.18*	
		For Oil Based Paint, Add	*0.10*	
		For Orange Peel Finish, Add	*0.24*	
		For Work >15' To 20' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.37*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.58*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.80*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.14*	
		For >100 To 250, Add	*0.54*	
		For >250 To 500, Add	*0.23*	
		For >2,500 To 5,000, Deduct	*-0.09*	
		For >5,000 To 10,000, Deduct	*-0.18*	
		For >10,000 To 20,000, Deduct	*-0.26*	
		For >20,000, Deduct	*-0.35*	
09 91 23 00-0162	SF	1 Coat Primer, Sprayed, Paint Interior Drywall/Plaster Ceiling	0.86	
		For Epoxy Paint, Add	*0.11*	
		For Oil Based Paint, Add	*0.05*	
		For Work >15' To 20' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.35*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.51*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.17*	
09 91 23 00-0163	SF	1 Coat Paint, Sprayed, Paint Interior Drywall/Plaster Ceiling	0.85	
		For Epoxy Paint, Add	*0.10*	
		For Oil Based Paint, Add	*0.05*	
		For Work >15' To 20' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.52*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.17*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0164	SF	2 Coats Paint, Sprayed, Paint Interior Drywall/Plaster Ceiling	1.35	
		For Epoxy Paint, Add	*0.18*	
		For Oil Based Paint, Add	*0.09*	
		For Work >15' To 20' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.24*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.39*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.53*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.78*	
		For >100 To 250, Add	*0.38*	
		For >250 To 500, Add	*0.16*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.14*	
		For >10,000 To 20,000, Deduct	*-0.20*	
		For >20,000, Deduct	*-0.27*	

09 91 23 00-0165 Paint Interior Metal Ceilings *(09 91 23 00-0128)*

09 91 23 00-0166 Galvanized Surfaces, Galvanized Primer *(09 91 23 00-0165)*

Note: Linseed oil or acrylic latex paint.

09 91 23 00-0167	SF	1 Coat Primer, Brush Work, Paint Interior Galvanized Ceiling	1.46	
		For Electrostatic Painting, Add	*0.21*	
		For Work >15' To 20' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.27*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.58*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.86*	
		For >100 To 250, Add	*0.41*	
		For >250 To 500, Add	*0.18*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.15*	
		For >10,000 To 20,000, Deduct	*-0.22*	
		For >20,000, Deduct	*-0.29*	
09 91 23 00-0168	SF	1 Coat Paint, Brush Work, Paint Interior Galvanized Ceiling	1.60	
		For Electrostatic Painting, Add	*0.22*	
		For Work >15' To 20' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.30*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.48*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.66*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.96*	
		For >100 To 250, Add	*0.46*	
		For >250 To 500, Add	*0.20*	
		For >2,500 To 5,000, Deduct	*-0.08*	
		For >5,000 To 10,000, Deduct	*-0.16*	
		For >10,000 To 20,000, Deduct	*-0.24*	
		For >20,000, Deduct	*-0.32*	
09 91 23 00-0169	SF	2 Coats Paint, Brush Work, Paint Interior Galvanized Ceiling	2.92	
		For Electrostatic Painting, Add	*0.41*	
		For Work >15' To 20' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.53*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.85*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.17*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.71*	
		For >100 To 250, Add	*0.82*	
		For >250 To 500, Add	*0.36*	
		For >2,500 To 5,000, Deduct	*-0.15*	
		For >5,000 To 10,000, Deduct	*-0.29*	
		For >10,000 To 20,000, Deduct	*-0.44*	
		For >20,000, Deduct	*-0.58*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0170	SF	1 Coat Primer, Brush/Roller Work, Paint Interior Galvanized Ceiling	1.12	
		For Electrostatic Painting, Add	*0.16*	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.43*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.64*	
		For >100 To 250, Add	*0.31*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.22*	
09 91 23 00-0171	SF	1 Coat Paint, Brush/Roller Work, Paint Interior Galvanized Ceiling	1.25	
		For Electrostatic Painting, Add	*0.17*	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.37*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.51*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.74*	
		For >100 To 250, Add	*0.36*	
		For >250 To 500, Add	*0.15*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.19*	
		For >20,000, Deduct	*-0.25*	
09 91 23 00-0172	SF	2 Coats Paint, Brush/Roller Work, Paint Interior Galvanized Ceiling	2.33	
		For Electrostatic Painting, Add	*0.33*	
		For Work >15' To 20' Above Floor, Add	*0.25*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.67*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.92*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.35*	
		For >100 To 250, Add	*0.65*	
		For >250 To 500, Add	*0.28*	
		For >2,500 To 5,000, Deduct	*-0.12*	
		For >5,000 To 10,000, Deduct	*-0.23*	
		For >10,000 To 20,000, Deduct	*-0.35*	
		For >20,000, Deduct	*-0.47*	
09 91 23 00-0173	SF	1 Coat Primer, Sprayed, Paint Interior Galvanized Ceiling	1.12	
		For Electrostatic Painting, Add	*0.18*	
		For Work >15' To 20' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.56*	
		For >100 To 250, Add	*0.28*	
		For >250 To 500, Add	*0.12*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.22*	
09 91 23 00-0174	SF	1 Coat Paint, Sprayed, Paint Interior Galvanized Ceiling	1.27	
		For Electrostatic Painting, Add	*0.20*	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.45*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.68*	
		For >100 To 250, Add	*0.33*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.19*	
		For >20,000, Deduct	*-0.25*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0175	SF	2 Coats Paint, Sprayed, Paint Interior Galvanized Ceiling	2.05	
		For Electrostatic Painting, Add	*0.34*	
		For Work >15' To 20' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.28*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.45*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.62*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.99*	
		For >100 To 250, Add	*0.49*	
		For >250 To 500, Add	*0.22*	
		For >2,500 To 5,000, Deduct	*-0.10*	
		For >5,000 To 10,000, Deduct	*-0.21*	
		For >10,000 To 20,000, Deduct	*-0.31*	
		For >20,000, Deduct	*-0.41*	

09 91 23 00-0176 Aluminum And Aluminum Alloy Surface Pretreatment Primer *(09 91 23 00-0165)*

Note: Alkyd enamel paint.

09 91 23 00-0177	SF	1 Coat Primer, Brush Work, Paint Interior Aluminum And Aluminum Alloy Ceiling	1.46	
		For Electrostatic Painting, Add	*0.21*	
		For Work >15' To 20' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.27*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.58*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.86*	
		For >100 To 250, Add	*0.41*	
		For >250 To 500, Add	*0.18*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.15*	
		For >10,000 To 20,000, Deduct	*-0.22*	
		For >20,000, Deduct	*-0.29*	
09 91 23 00-0178	SF	1 Coat Paint, Brush Work, Paint Interior Aluminum And Aluminum Alloy Ceiling	1.60	
		For Electrostatic Painting, Add	*0.22*	
		For Work >15' To 20' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.30*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.48*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.66*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.96*	
		For >100 To 250, Add	*0.46*	
		For >250 To 500, Add	*0.20*	
		For >2,500 To 5,000, Deduct	*-0.08*	
		For >5,000 To 10,000, Deduct	*-0.16*	
		For >10,000 To 20,000, Deduct	*-0.24*	
		For >20,000, Deduct	*-0.32*	
09 91 23 00-0179	SF	2 Coats Paint, Brush Work, Paint Interior Aluminum And Aluminum Alloy Ceiling	2.92	
		For Electrostatic Painting, Add	*0.41*	
		For Work >15' To 20' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.53*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.85*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.17*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.71*	
		For >100 To 250, Add	*0.82*	
		For >250 To 500, Add	*0.36*	
		For >2,500 To 5,000, Deduct	*-0.15*	
		For >5,000 To 10,000, Deduct	*-0.29*	
		For >10,000 To 20,000, Deduct	*-0.44*	
		For >20,000, Deduct	*-0.58*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0180	SF	1 Coat Primer, Brush/Roller Work, Paint Interior Aluminum And Aluminum Alloy Ceiling	1.25	
		For Electrostatic Painting, Add	*0.19*	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.43*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.66*	
		For >100 To 250, Add	*0.32*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.19*	
		For >20,000, Deduct	*-0.25*	
09 91 23 00-0181	SF	1 Coat Paint, Brush/Roller Work, Paint Interior Aluminum And Aluminum Alloy Ceiling	1.38	
		For Electrostatic Painting, Add	*0.21*	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.37*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.51*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.76*	
		For >100 To 250, Add	*0.37*	
		For >250 To 500, Add	*0.16*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.14*	
		For >10,000 To 20,000, Deduct	*-0.21*	
		For >20,000, Deduct	*-0.28*	
09 91 23 00-0182	SF	2 Coats Paint, Brush/Roller Work, Paint Interior Aluminum And Aluminum Alloy Ceiling	2.63	
		For Electrostatic Painting, Add	*0.40*	
		For Work >15' To 20' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.43*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.68*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.94*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.42*	
		For >100 To 250, Add	*0.69*	
		For >250 To 500, Add	*0.30*	
		For >2,500 To 5,000, Deduct	*-0.13*	
		For >5,000 To 10,000, Deduct	*-0.26*	
		For >10,000 To 20,000, Deduct	*-0.39*	
		For >20,000, Deduct	*-0.53*	
09 91 23 00-0183	SF	1 Coat Primer, Sprayed, Paint Interior Aluminum And Aluminum Alloy Ceiling	1.12	
		For Electrostatic Painting, Add	*0.18*	
		For Work >15' To 20' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.56*	
		For >100 To 250, Add	*0.28*	
		For >250 To 500, Add	*0.12*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.22*	
09 91 23 00-0184	SF	1 Coat Paint, Sprayed, Paint Interior Aluminum And Aluminum Alloy Ceiling	1.27	
		For Electrostatic Painting, Add	*0.20*	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.45*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.68*	
		For >100 To 250, Add	*0.33*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.19*	
		For >20,000, Deduct	*-0.25*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0185	SF	2 Coats Paint, Sprayed, Paint Interior Aluminum And Aluminum Alloy Ceiling	2.05	
		For Electrostatic Painting, Add	*0.34*	
		For Work >15' To 20' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.28*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.45*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.62*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.99*	
		For >100 To 250, Add	*0.49*	
		For >250 To 500, Add	*0.22*	
		For >2,500 To 5,000, Deduct	*-0.10*	
		For >5,000 To 10,000, Deduct	*-0.21*	
		For >10,000 To 20,000, Deduct	*-0.31*	
		For >20,000, Deduct	*-0.41*	
09 91 23 00-0186		Paint Interior Ceiling Tile Grid *(09 91 23 00-0165)*		
		Note: Grid only.		
09 91 23 00-0187	LF	1 Coat Paint, Brush/Roller Work, Paint Interior Ceiling Tile Grid	0.30	
		For Electrostatic Painting, Add	*0.04*	
		For Work >15' To 20' Above Floor, Add	*0.04*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.06*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.19*	
		For >100 To 250, Add	*0.09*	
		For >250 To 500, Add	*0.04*	
		For >2,500 To 5,000, Deduct	*-0.02*	
		For >5,000 To 10,000, Deduct	*-0.03*	
		For >10,000 To 20,000, Deduct	*-0.05*	
		For >20,000, Deduct	*-0.06*	
09 91 23 00-0188	LF	2 Coats Paint, Brush/Roller Work, Paint Interior Ceiling Tile Grid	0.62	
		For Electrostatic Painting, Add	*0.08*	
		For Work >15' To 20' Above Floor, Add	*0.08*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.28*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.39*	
		For >100 To 250, Add	*0.19*	
		For >250 To 500, Add	*0.08*	
		For >2,500 To 5,000, Deduct	*-0.03*	
		For >5,000 To 10,000, Deduct	*-0.06*	
		For >10,000 To 20,000, Deduct	*-0.09*	
		For >20,000, Deduct	*-0.12*	
09 91 23 00-0189		Paint Interior Corrugated Metal Ceilings *(09 91 23 00-0165)*		
09 91 23 00-0190	SF	1 Coat Primer, Sprayed, Paint Interior Corrugated Metal Ceiling	1.48	
		For Electrostatic Painting, Add	*0.24*	
		For Work >15' To 20' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.35*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.48*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.74*	
		For >100 To 250, Add	*0.37*	
		For >250 To 500, Add	*0.16*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.15*	
		For >10,000 To 20,000, Deduct	*-0.22*	
		For >20,000, Deduct	*-0.30*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0191	SF	1 Coat Paint, Sprayed, Paint Interior Corrugated Metal Ceiling	1.68	
		For Electrostatic Painting, Add	*0.26*	
		For Work >15' To 20' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.27*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.43*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.59*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.89*	
		For >100 To 250, Add	*0.44*	
		For >250 To 500, Add	*0.19*	
		For >2,500 To 5,000, Deduct	*-0.08*	
		For >5,000 To 10,000, Deduct	*-0.17*	
		For >10,000 To 20,000, Deduct	*-0.25*	
		For >20,000, Deduct	*-0.34*	
09 91 23 00-0192	SF	2 Coats Paint, Sprayed, Paint Interior Corrugated Metal Ceiling	2.74	
		For Electrostatic Painting, Add	*0.46*	
		For Work >15' To 20' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.38*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.60*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.83*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.32*	
		For >100 To 250, Add	*0.65*	
		For >250 To 500, Add	*0.29*	
		For >2,500 To 5,000, Deduct	*-0.14*	
		For >5,000 To 10,000, Deduct	*-0.27*	
		For >10,000 To 20,000, Deduct	*-0.41*	
		For >20,000, Deduct	*-0.55*	

09 91 23 00-0193 Paint Interior Wood Ceilings *(09 91 23 00-0128)*

09 91 23 00-0194 Paint Interior Smooth Wood Ceilings *(09 91 23 00-0193)*

09 91 23 00-0195	LF	1 Coat Paint, Cut-in Brush Work, Paint Interior Wood Smooth Ceiling	0.24	
		For Oil Based Paint, Add	*0.01*	
		For Work >15' To 20' Above Floor, Add	*0.03*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.05*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.08*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.16*	
		For >100 To 250, Add	*0.07*	
		For >250 To 500, Add	*0.03*	
		For >2,500 To 5,000, Deduct	*-0.01*	
		For >5,000 To 10,000, Deduct	*-0.02*	
		For >10,000 To 20,000, Deduct	*-0.04*	
		For >20,000, Deduct	*-0.05*	
09 91 23 00-0196	SF	1 Coat Primer, Brush Work, Paint Interior Wood Smooth Ceiling	1.36	
		For Oil Based Paint, Add	*0.08*	
		For Work >15' To 20' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.28*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.44*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.61*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.86*	
		For >100 To 250, Add	*0.41*	
		For >250 To 500, Add	*0.18*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.14*	
		For >10,000 To 20,000, Deduct	*-0.20*	
		For >20,000, Deduct	*-0.27*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0197	SF	1 Coat Paint, Brush Work, Paint Interior Wood Smooth Ceiling	1.42	
		For Oil Based Paint, Add	*0.08*	
		For Work >15' To 20' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.30*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.48*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.66*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.93*	
		For >100 To 250, Add	*0.44*	
		For >250 To 500, Add	*0.19*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.14*	
		For >10,000 To 20,000, Deduct	*-0.21*	
		For >20,000, Deduct	*-0.28*	
09 91 23 00-0198	SF	2 Coats Paint, Brush Work, Paint Interior Wood Smooth Ceiling	2.57	
		For Oil Based Paint, Add	*0.15*	
		For Work >15' To 20' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.53*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.85*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.17*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.66*	
		For >100 To 250, Add	*0.79*	
		For >250 To 500, Add	*0.34*	
		For >2,500 To 5,000, Deduct	*-0.13*	
		For >5,000 To 10,000, Deduct	*-0.26*	
		For >10,000 To 20,000, Deduct	*-0.39*	
		For >20,000, Deduct	*-0.51*	
09 91 23 00-0199	SF	1 Coat Primer, Brush/Roller Work, Paint Interior Smooth Wood Ceiling	1.10	
		For Oil Based Paint, Add	*0.07*	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.44*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.65*	
		For >100 To 250, Add	*0.31*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.22*	
09 91 23 00-0200	SF	1 Coat Paint, Brush/Roller Work, Paint Interior Smooth Wood Ceiling	1.19	
		For Oil Based Paint, Add	*0.07*	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.37*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.51*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.74*	
		For >100 To 250, Add	*0.35*	
		For >250 To 500, Add	*0.15*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.18*	
		For >20,000, Deduct	*-0.24*	
09 91 23 00-0201	SF	2 Coats Paint, Brush/Roller Work, Paint Interior Smooth Wood Ceiling	2.23	
		For Oil Based Paint, Add	*0.14*	
		For Work >15' To 20' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.43*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.68*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.94*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.36*	
		For >100 To 250, Add	*0.65*	
		For >250 To 500, Add	*0.28*	
		For >2,500 To 5,000, Deduct	*-0.11*	
		For >5,000 To 10,000, Deduct	*-0.22*	
		For >10,000 To 20,000, Deduct	*-0.33*	
		For >20,000, Deduct	*-0.45*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0202	SF	1 Coat Primer, Sprayed, Paint Interior Smooth Wood Ceiling	0.88	
		For Oil Based Paint, Add	*0.06*	
		For Work >15' To 20' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.53*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.18*	
09 91 23 00-0203	SF	1 Coat Paint, Sprayed, Paint Interior Smooth Wood Ceiling	1.04	
		For Oil Based Paint, Add	*0.06*	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.45*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.65*	
		For >100 To 250, Add	*0.31*	
		For >250 To 500, Add	*0.13*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.16*	
		For >20,000, Deduct	*-0.21*	
09 91 23 00-0204	SF	2 Coats Paint, Sprayed, Paint Interior Smooth Wood Ceiling	1.58	
		For Oil Based Paint, Add	*0.10*	
		For Work >15' To 20' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.28*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.45*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.62*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.92*	
		For >100 To 250, Add	*0.44*	
		For >250 To 500, Add	*0.19*	
		For >2,500 To 5,000, Deduct	*-0.08*	
		For >5,000 To 10,000, Deduct	*-0.16*	
		For >10,000 To 20,000, Deduct	*-0.24*	
		For >20,000, Deduct	*-0.32*	

09 91 23 00-0205 Paint Interior Wood Beams *(09 91 23 00-0128)*

09 91 23 00-0206	SF	1 Coat Primer, Brush Work, Paint Interior Wood Beams	1.50	
		For Oil Based Paint, Add	*0.09*	
		For Work >15' To 20' Above Floor, Add	*0.19*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.31*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.50*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.68*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.97*	
		For >100 To 250, Add	*0.46*	
		For >250 To 500, Add	*0.20*	
		For >2,500 To 5,000, Deduct	*-0.08*	
		For >5,000 To 10,000, Deduct	*-0.15*	
		For >10,000 To 20,000, Deduct	*-0.23*	
		For >20,000, Deduct	*-0.30*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0207	SF	1 Coat Paint, Brush Work, Paint Interior Wood Beams	1.53	
		For Oil Based Paint, Add	*0.09*	
		For Work >15' To 20' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.52*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.72*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.02*	
		For >100 To 250, Add	*0.48*	
		For >250 To 500, Add	*0.21*	
		For >2,500 To 5,000, Deduct	*-0.08*	
		For >5,000 To 10,000, Deduct	*-0.15*	
		For >10,000 To 20,000, Deduct	*-0.23*	
		For >20,000, Deduct	*-0.31*	
09 91 23 00-0208	SF	2 Coats Paint, Brush Work, Paint Interior Wood Beams	2.81	
		For Oil Based Paint, Add	*0.16*	
		For Work >15' To 20' Above Floor, Add	*0.35*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.59*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.94*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.30*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.84*	
		For >100 To 250, Add	*0.87*	
		For >250 To 500, Add	*0.38*	
		For >2,500 To 5,000, Deduct	*-0.14*	
		For >5,000 To 10,000, Deduct	*-0.28*	
		For >10,000 To 20,000, Deduct	*-0.42*	
		For >20,000, Deduct	*-0.56*	
09 91 23 00-0209	SF	1 Coat Primer, Brush/Roller Work, Paint Interior Wood Beams	1.21	
		For Oil Based Paint, Add	*0.08*	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.50*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.73*	
		For >100 To 250, Add	*0.35*	
		For >250 To 500, Add	*0.15*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.18*	
		For >20,000, Deduct	*-0.24*	
09 91 23 00-0210	SF	1 Coat Paint, Brush/Roller Work, Paint Interior Wood Beams	1.19	
		For Oil Based Paint, Add	*0.07*	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.37*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.51*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.74*	
		For >100 To 250, Add	*0.35*	
		For >250 To 500, Add	*0.15*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.18*	
		For >20,000, Deduct	*-0.24*	
09 91 23 00-0211	SF	2 Coats Paint, Brush/Roller Work, Paint Interior Wood Beams	2.23	
		For Oil Based Paint, Add	*0.14*	
		For Work >15' To 20' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.43*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.68*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.94*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.36*	
		For >100 To 250, Add	*0.65*	
		For >250 To 500, Add	*0.28*	
		For >2,500 To 5,000, Deduct	*-0.11*	
		For >5,000 To 10,000, Deduct	*-0.22*	
		For >10,000 To 20,000, Deduct	*-0.33*	
		For >20,000, Deduct	*-0.45*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0212	SF	1 Coat Primer, Sprayed, Paint Interior Wood Beams	1.04	
		For Oil Based Paint, Add	*0.06*	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.21*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.33*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.45*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.65*	
		For >100 To 250, Add	*0.31*	
		For >250 To 500, Add	*0.13*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.16*	
		For >20,000, Deduct	*-0.21*	
09 91 23 00-0213	SF	1 Coat Paint, Sprayed, Paint Interior Wood Beams	1.03	
		For Oil Based Paint, Add	*0.06*	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.45*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.64*	
		For >100 To 250, Add	*0.31*	
		For >250 To 500, Add	*0.13*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.15*	
		For >20,000, Deduct	*-0.21*	
09 91 23 00-0214	SF	2 Coats Paint, Sprayed, Paint Interior Wood Beams	1.72	
		For Oil Based Paint, Add	*0.11*	
		For Work >15' To 20' Above Floor, Add	*0.19*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.51*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.70*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.02*	
		For >100 To 250, Add	*0.49*	
		For >250 To 500, Add	*0.21*	
		For >2,500 To 5,000, Deduct	*-0.09*	
		For >5,000 To 10,000, Deduct	*-0.17*	
		For >10,000 To 20,000, Deduct	*-0.26*	
		For >20,000, Deduct	*-0.34*	

09 91 23 00-0215 Paint Interior Floors And Decks *(09 91 23)*

09 91 23 00-0216 Paint Interior Concrete Floors And Decks *(09 91 23 00-0215)*

09 91 23 00-0217	LF	1 Coat Paint, Cut-in Brush Work, Paint Interior Concrete Floors And Decks	0.15	
		For Up To 100, Add	*0.10*	
		For >100 To 250, Add	*0.05*	
		For >250 To 500, Add	*0.02*	
		For >2,500 To 5,000, Deduct	*-0.01*	
		For >5,000 To 10,000, Deduct	*-0.02*	
		For >10,000 To 20,000, Deduct	*-0.02*	
		For >20,000, Deduct	*-0.03*	
09 91 23 00-0218	SF	1 Coat Primer, Brush Work, Paint Interior Concrete Floors And Decks	0.85	
		For Oil Based Paint, Add	*0.05*	
		For Epoxy Paint, Add	*0.10*	
		For Up To 100, Add	*0.52*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.17*	
09 91 23 00-0219	SF	1 Coat Paint, Brush Work, Paint Interior Concrete Floors And Decks	0.94	
		For Oil Based Paint, Add	*0.05*	
		For Epoxy Paint, Add	*0.09*	
		For Up To 100, Add	*0.62*	
		For >100 To 250, Add	*0.29*	
		For >250 To 500, Add	*0.13*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.14*	
		For >20,000, Deduct	*-0.19*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0220	SF	2 Coats Paint, Brush Work, Paint Interior Concrete Floors And Decks	1.85	
		For Oil Based Paint, Add	*0.11*	
		For Epoxy Paint, Add	*0.18*	
		For Up To 100, Add	*1.21*	
		For >100 To 250, Add	*0.57*	
		For >250 To 500, Add	*0.25*	
		For >2,500 To 5,000, Deduct	*-0.09*	
		For >5,000 To 10,000, Deduct	*-0.19*	
		For >10,000 To 20,000, Deduct	*-0.28*	
		For >20,000, Deduct	*-0.37*	
09 91 23 00-0221	SF	1 Coat Primer, Brush/Roller Work, Paint Interior Concrete Floors And Decks	0.84	
		For Oil Based Paint, Add	*0.05*	
		For Epoxy Paint, Add	*0.10*	
		For Up To 100, Add	*0.52*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.08*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.17*	
09 91 23 00-0222	SF	1 Coat Paint, Brush/Roller Work, Paint Interior Concrete Floors And Decks	0.81	
		For Oil Based Paint, Add	*0.05*	
		For Epoxy Paint, Add	*0.09*	
		For Up To 100, Add	*0.52*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.08*	
		For >10,000 To 20,000, Deduct	*-0.12*	
		For >20,000, Deduct	*-0.16*	
09 91 23 00-0223	SF	2 Coats Paint, Brush/Roller Work, Paint Interior Concrete Floors And Decks	1.33	
		For Oil Based Paint, Add	*0.08*	
		For Epoxy Paint, Add	*0.16*	
		For Up To 100, Add	*0.82*	
		For >100 To 250, Add	*0.39*	
		For >250 To 500, Add	*0.17*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.20*	
		For >20,000, Deduct	*-0.27*	
09 91 23 00-0224	SF	1 Coat Primer, Sprayed, Paint Interior Concrete Floors And Decks	0.66	
		For Oil Based Paint, Add	*0.04*	
		For Epoxy Paint, Add	*0.10*	
		For Up To 100, Add	*0.36*	
		For >100 To 250, Add	*0.18*	
		For >250 To 500, Add	*0.08*	
		For >2,500 To 5,000, Deduct	*-0.03*	
		For >5,000 To 10,000, Deduct	*-0.07*	
		For >10,000 To 20,000, Deduct	*-0.10*	
		For >20,000, Deduct	*-0.13*	
09 91 23 00-0225	SF	1 Coat Paint, Sprayed, Paint Interior Concrete Floors And Decks	0.68	
		For Oil Based Paint, Add	*0.04*	
		For Epoxy Paint, Add	*0.09*	
		For Up To 100, Add	*0.40*	
		For >100 To 250, Add	*0.19*	
		For >250 To 500, Add	*0.08*	
		For >2,500 To 5,000, Deduct	*-0.03*	
		For >5,000 To 10,000, Deduct	*-0.07*	
		For >10,000 To 20,000, Deduct	*-0.10*	
		For >20,000, Deduct	*-0.14*	
09 91 23 00-0226	SF	2 Coats Paint, Sprayed, Paint Interior Concrete Floors And Decks	1.20	
		For Oil Based Paint, Add	*0.08*	
		For Epoxy Paint, Add	*0.17*	
		For Up To 100, Add	*0.67*	
		For >100 To 250, Add	*0.33*	
		For >250 To 500, Add	*0.14*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.18*	
		For >20,000, Deduct	*-0.24*	
09 91 23 00-0227	SF	1 Coat Bonding Agent, Brush Work, Paint Interior Concrete Floors And Decks	0.88	
		For Up To 100, Add	*0.53*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.18*	
09 91 23 00-0228	SF	1 Coat Bonding Agent, Brush/Roller Work, Paint Interior Concrete Floors And Decks	0.87	
		For Up To 100, Add	*0.52*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.17*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0229	SF	1 Coat Bonding Agent, Sprayed, Paint Interior Concrete Floors And Decks	0.71	
		For Up To 100, Add	*0.37*	
		For >100 To 250, Add	*0.18*	
		For >250 To 500, Add	*0.08*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.07*	
		For >10,000 To 20,000, Deduct	*-0.11*	
		For >20,000, Deduct	*-0.14*	
09 91 23 00-0230	SF	1 Coat Non-Slip Paint, Brush Work, Paint Interior Concrete Floors And Decks	2.49	
		For Up To 100, Add	*0.85*	
		For >100 To 250, Add	*0.45*	
		For >250 To 500, Add	*0.20*	
		For >2,500 To 5,000, Deduct	*-0.12*	
		For >5,000 To 10,000, Deduct	*-0.25*	
		For >10,000 To 20,000, Deduct	*-0.37*	
		For >20,000, Deduct	*-0.50*	
09 91 23 00-0231	SF	1 Coat Non-Slip Epoxy Paint, Brush Work, Paint Interior Concrete Floors And Decks (Rust-Oleum® AS91864251)	7.09	
		For Up To 100, Add	*1.54*	
		For >100 To 250, Add	*0.91*	
		For >250 To 500, Add	*0.43*	
		For >2,500 To 5,000, Deduct	*-0.35*	
		For >5,000 To 10,000, Deduct	*-0.71*	
		For >10,000 To 20,000, Deduct	*-1.06*	
		For >20,000, Deduct	*-1.42*	

09 91 23 00-0232 Paint Interior Wood Floors And Decks *(09 91 23 00-0215)*

09 91 23 00-0233	LF	1 Coat Paint, Cut-in Brush Work, Paint Interior Wood Floors And Decks	0.19	
		For Up To 100, Add	*0.12*	
		For >100 To 250, Add	*0.06*	
		For >250 To 500, Add	*0.02*	
		For >2,500 To 5,000, Deduct	*-0.01*	
		For >5,000 To 10,000, Deduct	*-0.02*	
		For >10,000 To 20,000, Deduct	*-0.03*	
		For >20,000, Deduct	*-0.04*	
09 91 23 00-0234	SF	1 Coat Primer, Brush Work, Paint Interior Wood Floors And Decks	1.06	
		For Oil Based Paint, Add	*0.07*	
		For Up To 100, Add	*0.64*	
		For >100 To 250, Add	*0.31*	
		For >250 To 500, Add	*0.13*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.16*	
		For >20,000, Deduct	*-0.21*	
09 91 23 00-0235	SF	1 Coat Paint, Brush Work, Paint Interior Wood Floors And Decks	1.15	
		For Oil Based Paint, Add	*0.07*	
		For Up To 100, Add	*0.73*	
		For >100 To 250, Add	*0.35*	
		For >250 To 500, Add	*0.15*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.23*	
09 91 23 00-0236	SF	2 Coats Paint, Brush Work, Paint Interior Wood Floors And Decks	2.16	
		For Oil Based Paint, Add	*0.13*	
		For Up To 100, Add	*1.35*	
		For >100 To 250, Add	*0.64*	
		For >250 To 500, Add	*0.28*	
		For >2,500 To 5,000, Deduct	*-0.11*	
		For >5,000 To 10,000, Deduct	*-0.22*	
		For >10,000 To 20,000, Deduct	*-0.32*	
		For >20,000, Deduct	*-0.43*	
09 91 23 00-0237	SF	1 Coat Primer, Brush/Roller Work, Paint Interior Wood Floors And Decks	0.86	
		For Oil Based Paint, Add	*0.06*	
		For Up To 100, Add	*0.47*	
		For >100 To 250, Add	*0.23*	
		For >250 To 500, Add	*0.10*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.17*	
09 91 23 00-0238	SF	1 Coat Paint, Brush/Roller Work, Paint Interior Wood Floors And Decks	0.92	
		For Oil Based Paint, Add	*0.06*	
		For Up To 100, Add	*0.53*	
		For >100 To 250, Add	*0.26*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.14*	
		For >20,000, Deduct	*-0.18*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0239	SF	2 Coats Paint, Brush/Roller Work, Paint Interior Wood Floors And Decks	1.83	
		For Oil Based Paint, Add	*0.12*	
		For Up To 100, Add	*1.06*	
		For >100 To 250, Add	*0.51*	
		For >250 To 500, Add	*0.22*	
		For >2,500 To 5,000, Deduct	*-0.09*	
		For >5,000 To 10,000, Deduct	*-0.18*	
		For >10,000 To 20,000, Deduct	*-0.27*	
		For >20,000, Deduct	*-0.37*	
09 91 23 00-0240	SF	1 Coat Primer, Sprayed, Paint Interior Wood Floors And Decks	0.71	
		For Oil Based Paint, Add	*0.05*	
		For Up To 100, Add	*0.40*	
		For >100 To 250, Add	*0.19*	
		For >250 To 500, Add	*0.08*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.07*	
		For >10,000 To 20,000, Deduct	*-0.11*	
		For >20,000, Deduct	*-0.14*	
09 91 23 00-0241	SF	1 Coat Paint, Sprayed, Paint Interior Wood Floors And Decks	0.88	
		For Oil Based Paint, Add	*0.06*	
		For Up To 100, Add	*0.53*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.13*	
		For >20,000, Deduct	*-0.18*	
09 91 23 00-0242	SF	2 Coats Paint, Sprayed, Paint Interior Wood Floors And Decks	1.28	
		For Oil Based Paint, Add	*0.09*	
		For Up To 100, Add	*0.69*	
		For >100 To 250, Add	*0.34*	
		For >250 To 500, Add	*0.15*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.19*	
		For >20,000, Deduct	*-0.26*	
09 91 23 00-0243	SF	1 Coat Non-Slip Paint, Brush Work, Paint Interior Wood Floors And Decks	2.49	
		For Up To 100, Add	*0.85*	
		For >100 To 250, Add	*0.45*	
		For >250 To 500, Add	*0.20*	
		For >2,500 To 5,000, Deduct	*-0.12*	
		For >5,000 To 10,000, Deduct	*-0.25*	
		For >10,000 To 20,000, Deduct	*-0.37*	
		For >20,000, Deduct	*-0.50*	
09 91 23 00-0244	SF	1 Coat Non-Slip Epoxy Paint, Brush Work, Paint Interior Wood Floors And Decks	7.09	
		For Up To 100, Add	*1.54*	
		For >100 To 250, Add	*0.91*	
		For >250 To 500, Add	*0.43*	
		For >2,500 To 5,000, Deduct	*-0.35*	
		For >5,000 To 10,000, Deduct	*-0.71*	
		For >10,000 To 20,000, Deduct	*-1.06*	
		For >20,000, Deduct	*-1.42*	

09 91 23 00-0245 Paint Interior Doors And Windows *(09 91 23)*

09 91 23 00-0246 Paint Interior Door Frames *(09 91 23 00-0245)*

09 91 23 00-0247	LF	1 Coat Primer, Brush/Roller Work, Paint Interior Wood Door Frame And Trim	1.28	
		For Oil Based Paint, Add	*0.07*	
		For Painting One Face Of Frame Only, Deduct	*-0.34*	
09 91 23 00-0248	LF	1 Coat Paint, Brush/Roller Work, Paint Interior Wood Door Frame And Trim	1.65	
		For Oil Based Paint, Add	*0.09*	
		For Painting One Face Of Frame Only, Deduct	*-0.43*	
09 91 23 00-0249	LF	2 Coats Paint, Brush/Roller Work, Paint Interior Wood Door Frame And Trim	2.79	
		For Oil Based Paint, Add	*0.15*	
		For Painting One Face Of Frame Only, Deduct	*-0.73*	
09 91 23 00-0250	LF	1 Coat Primer, Brush/Roller Work, Paint Interior Metal Door Frame And Trim	1.33	
		For Oil Based Paint, Add	*0.08*	
		For Painting One Face Of Frame Only, Deduct	*-0.36*	
09 91 23 00-0251	LF	1 Coat Paint, Brush/Roller Work, Paint Interior Metal Door Frame And Trim	1.70	
		For Oil Based Paint, Add	*0.09*	
		For Painting One Face Of Frame Only, Deduct	*-0.45*	
09 91 23 00-0252	LF	2 Coats Paint, Brush/Roller Work, Paint Interior Metal Door Frame And Trim	2.88	
		For Oil Based Paint, Add	*0.16*	
		For Painting One Face Of Frame Only, Deduct	*-0.77*	

09 91 23 00-0253 Paint Interior Metal Doors *(09 91 23 00-0245)*

09 91 23 00-0254	EA	1 Coat Primer, Brush/Roller Work, One Face, Paint Interior Metal Door	65.69	
		For Electrostatic Painting, Add	*10.66*	
		For Half Louvered Door, Add	*5.76*	
		For Full Louvered Door, Add	*9.60*	
		For Oil Based Paint, Add	*4.65*	
		For >5 To 10, Deduct	*-3.28*	
		For >10 To 25, Deduct	*-6.57*	
		For >25, Deduct	*-9.85*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0255	EA	1 Coat Paint, Brush/Roller Work, One Face, Paint Interior Metal Door	65.69	
		For Electrostatic Painting, Add	*10.66*	
		For Half Louvered Door, Add	*5.76*	
		For Full Louvered Door, Add	*9.60*	
		For Oil Based Paint, Add	*4.65*	
		For >5 To 10, Deduct	*-3.28*	
		For >10 To 25, Deduct	*-6.57*	
		For >25, Deduct	*-9.85*	
09 91 23 00-0256	EA	2 Coats Paint, Brush/Roller Work, One Face, Paint Interior Metal Door	119.11	
		For Electrostatic Painting, Add	*20.05*	
		For Half Louvered Door, Add	*9.73*	
		For Full Louvered Door, Add	*16.21*	
		For Oil Based Paint, Add	*8.67*	
		For >5 To 10, Deduct	*-5.96*	
		For >10 To 25, Deduct	*-11.91*	
		For >25, Deduct	*-17.87*	
09 91 23 00-0257	EA	1 Coat Primer, Brush/Roller Work, Both Faces, Paint Interior Metal Door	117.90	
		For Electrostatic Painting, Add	*19.15*	
		For Half Louvered Door, Add	*10.32*	
		For Full Louvered Door, Add	*17.21*	
		For Oil Based Paint, Add	*8.35*	
		For >5 To 10, Deduct	*-5.90*	
		For >10 To 25, Deduct	*-11.79*	
		For >25, Deduct	*-17.69*	
09 91 23 00-0258	EA	1 Coat Paint, Brush/Roller Work, Both Faces, Paint Interior Metal Door	117.91	
		For Electrostatic Painting, Add	*19.15*	
		For Half Louvered Door, Add	*10.33*	
		For Full Louvered Door, Add	*17.21*	
		For Oil Based Paint, Add	*8.35*	
		For >5 To 10, Deduct	*-5.90*	
		For >10 To 25, Deduct	*-11.79*	
		For >25, Deduct	*-17.69*	
09 91 23 00-0259	EA	2 Coats Paint, Brush/Roller Work, Both Faces, Paint Interior Metal Door	214.60	
		For Electrostatic Painting, Add	*36.18*	
		For Half Louvered Door, Add	*17.47*	
		For Full Louvered Door, Add	*29.12*	
		For Oil Based Paint, Add	*15.64*	
		For >5 To 10, Deduct	*-10.73*	
		For >10 To 25, Deduct	*-21.46*	
		For >25, Deduct	*-32.19*	
09 91 23 00-0260	EA	1 Coat Primer, Sprayed, One Face, Paint Interior Metal Door	58.15	
		For Electrostatic Painting, Add	*10.32*	
		For Half Louvered Door, Add	*4.22*	
		For Full Louvered Door, Add	*7.03*	
		For Oil Based Paint, Add	*4.41*	
		For >5 To 10, Deduct	*-2.91*	
		For >10 To 25, Deduct	*-5.82*	
		For >25, Deduct	*-8.72*	
09 91 23 00-0261	EA	1 Coat Paint, Sprayed, One Face, Paint Interior Metal Door	58.15	
		For Electrostatic Painting, Add	*10.32*	
		For Half Louvered Door, Add	*4.22*	
		For Full Louvered Door, Add	*7.03*	
		For Oil Based Paint, Add	*4.41*	
		For >5 To 10, Deduct	*-2.91*	
		For >10 To 25, Deduct	*-5.82*	
		For >25, Deduct	*-8.72*	
09 91 23 00-0262	EA	2 Coats Paint, Sprayed, One Face, Paint Interior Metal Door	107.17	
		For Electrostatic Painting, Add	*19.67*	
		For Half Louvered Door, Add	*7.12*	
		For Full Louvered Door, Add	*11.87*	
		For Oil Based Paint, Add	*8.34*	
		For >5 To 10, Deduct	*-5.36*	
		For >10 To 25, Deduct	*-10.72*	
		For >25, Deduct	*-16.08*	
09 91 23 00-0263	EA	1 Coat Primer, Sprayed, Both Faces, Paint Interior Metal Door	104.38	
		For Electrostatic Painting, Add	*18.53*	
		For Half Louvered Door, Add	*7.56*	
		For Full Louvered Door, Add	*12.60*	
		For Oil Based Paint, Add	*7.92*	
		For >5 To 10, Deduct	*-5.22*	
		For >10 To 25, Deduct	*-10.44*	
		For >25, Deduct	*-15.66*	
09 91 23 00-0264	EA	1 Coat Paint, Sprayed, Both Faces, Paint Interior Metal Door	104.38	
		For Electrostatic Painting, Add	*18.53*	
		For Half Louvered Door, Add	*7.56*	
		For Full Louvered Door, Add	*12.60*	
		For Oil Based Paint, Add	*7.92*	
		For >5 To 10, Deduct	*-5.22*	
		For >10 To 25, Deduct	*-10.44*	
		For >25, Deduct	*-15.66*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0265	EA	2 Coats Paint, Sprayed, Both Faces, Paint Interior Metal Door	193.25	
		For Electrostatic Painting, Add	*35.52*	
		For Half Louvered Door, Add	*12.80*	
		For Full Louvered Door, Add	*21.33*	
		For Oil Based Paint, Add	*15.06*	
		For >5 To 10, Deduct	*-9.66*	
		For >10 To 25, Deduct	*-19.33*	
		For >25, Deduct	*-28.99*	

09 91 23 00-0266 Paint Interior Wood Doors *(09 91 23 00-0245)*

09 91 23 00-0267	EA	1 Coat Primer, Brush/Roller Work, One Face, Paint Interior Wood Door	56.13	
		For Oil Based Paint, Add	*3.69*	
		For Half Louvered Door, Add	*5.76*	
		For Full Louvered Door, Add	*9.60*	
		For >5 To 10, Deduct	*-2.81*	
		For >10 To 25, Deduct	*-5.61*	
		For >25, Deduct	*-8.42*	
09 91 23 00-0268	EA	1 Coat Paint, Brush/Roller Work, One Face, Paint Interior Wood Door	56.13	
		For Oil Based Paint, Add	*3.69*	
		For Half Louvered Door, Add	*5.76*	
		For Full Louvered Door, Add	*9.60*	
		For >5 To 10, Deduct	*-2.81*	
		For >10 To 25, Deduct	*-5.61*	
		For >25, Deduct	*-8.42*	
09 91 23 00-0269	EA	2 Coats Paint, Brush/Roller Work, One Face, Paint Interior Wood Door	100.10	
		For Oil Based Paint, Add	*6.77*	
		For Half Louvered Door, Add	*9.73*	
		For Full Louvered Door, Add	*16.21*	
		For >5 To 10, Deduct	*-5.01*	
		For >10 To 25, Deduct	*-10.01*	
		For >25, Deduct	*-15.02*	
09 91 23 00-0270	EA	1 Coat Primer, Brush/Roller Work, Both Faces, Paint Interior Wood Door	100.72	
		For Oil Based Paint, Add	*6.63*	
		For Half Louvered Door, Add	*10.33*	
		For Full Louvered Door, Add	*17.21*	
		For >5 To 10, Deduct	*-5.04*	
		For >10 To 25, Deduct	*-10.07*	
		For >25, Deduct	*-15.11*	
09 91 23 00-0271	EA	1 Coat Paint, Brush/Roller Work, Both Faces, Paint Interior Wood Door	100.72	
		For Oil Based Paint, Add	*6.63*	
		For Half Louvered Door, Add	*10.33*	
		For Full Louvered Door, Add	*17.21*	
		For >5 To 10, Deduct	*-5.04*	
		For >10 To 25, Deduct	*-10.07*	
		For >25, Deduct	*-15.11*	
09 91 23 00-0272	EA	2 Coats Paint, Brush/Roller Work, Both Faces, Paint Interior Wood Door	180.22	
		For Oil Based Paint, Add	*12.20*	
		For Half Louvered Door, Add	*17.47*	
		For Full Louvered Door, Add	*29.12*	
		For >5 To 10, Deduct	*-9.01*	
		For >10 To 25, Deduct	*-18.02*	
		For >25, Deduct	*-27.03*	
09 91 23 00-0273	EA	1 Coat Primer, Sprayed, One Face, Paint Interior Wood Door	47.63	
		For Oil Based Paint, Add	*3.36*	
		For Half Louvered Door, Add	*4.22*	
		For Full Louvered Door, Add	*7.03*	
		For >5 To 10, Deduct	*-2.38*	
		For >10 To 25, Deduct	*-4.76*	
		For >25, Deduct	*-7.14*	
09 91 23 00-0274	EA	1 Coat Paint, Sprayed, One Face, Paint Interior Wood Door	47.63	
		For Oil Based Paint, Add	*3.36*	
		For Half Louvered Door, Add	*4.22*	
		For Full Louvered Door, Add	*7.03*	
		For >5 To 10, Deduct	*-2.38*	
		For >10 To 25, Deduct	*-4.76*	
		For >25, Deduct	*-7.14*	
09 91 23 00-0275	EA	2 Coats Paint, Sprayed, One Face, Paint Interior Wood Door	86.28	
		For Oil Based Paint, Add	*6.25*	
		For Half Louvered Door, Add	*7.13*	
		For Full Louvered Door, Add	*11.88*	
		For >5 To 10, Deduct	*-4.31*	
		For >10 To 25, Deduct	*-8.63*	
		For >25, Deduct	*-12.94*	
09 91 23 00-0276	EA	1 Coat Primer, Sprayed, Both Faces, Paint Interior Wood Door	85.47	
		For Oil Based Paint, Add	*6.03*	
		For Half Louvered Door, Add	*7.56*	
		For Full Louvered Door, Add	*12.60*	
		For >5 To 10, Deduct	*-4.27*	
		For >10 To 25, Deduct	*-8.55*	
		For >25, Deduct	*-12.82*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0277	EA	1 Coat Paint, Sprayed, Both Faces, Paint Interior Wood Door	85.47	
		For Oil Based Paint, Add	*6.03*	
		For Half Louvered Door, Add	*7.56*	
		For Full Louvered Door, Add	*12.60*	
		For >5 To 10, Deduct	*-4.27*	
		For >10 To 25, Deduct	*-8.55*	
		For >25, Deduct	*-12.82*	
09 91 23 00-0278	EA	2 Coats Paint, Sprayed, Both Faces, Paint Interior Wood Door	155.43	
		For Oil Based Paint, Add	*11.28*	
		For Half Louvered Door, Add	*12.80*	
		For Full Louvered Door, Add	*21.33*	
		For >5 To 10, Deduct	*-7.77*	
		For >10 To 25, Deduct	*-15.54*	
		For >25, Deduct	*-23.31*	
09 91 23 00-0279		**Paint Interior Metal Windows** *(09 91 23 00-0245)*		
		Note: Two finish coats paint over rust inhibitive primer.		
09 91 23 00-0280	EA	Up To 8 SF Window Size, 1 Coat Primer And Two Coats Paint, Brush Work, Interior Metal Window Including Trim, Brush/Roller Work	104.19	
		For Oil Based Paint, Add	*6.12*	
		For Electrostatic Painting, Add	*13.14*	
		For >5 To 10, Deduct	*-5.21*	
		For >10 To 25, Deduct	*-10.42*	
		For >25, Deduct	*-15.63*	
09 91 23 00-0281	EA	>8 To 14 SF Window Size, 1 Coat Primer And Two Coats Paint, Brush Work, Interior Metal Window Including Trim, Brush/Roller Work	127.31	
		For Oil Based Paint, Add	*7.77*	
		For Electrostatic Painting, Add	*16.94*	
		For >5 To 10, Deduct	*-6.37*	
		For >10 To 25, Deduct	*-12.73*	
		For >25, Deduct	*-19.10*	
09 91 23 00-0282	EA	>14 To 20 SF Window Size, 1 Coat Primer And Two Coats Paint, Brush Work, Interior Metal Window Including Trim, Brush/Roller Work	172.19	
		For Oil Based Paint, Add	*10.60*	
		For Electrostatic Painting, Add	*23.19*	
		For >5 To 10, Deduct	*-8.61*	
		For >10 To 25, Deduct	*-17.22*	
		For >25, Deduct	*-25.83*	
09 91 23 00-0283	EA	>20 To 26 SF Window Size, 1 Coat Primer And Two Coats Paint, Brush Work, Interior Metal Window Including Trim, Brush/Roller Work	193.94	
		For Oil Based Paint, Add	*11.95*	
		For Electrostatic Painting, Add	*26.14*	
		For >5 To 10, Deduct	*-9.70*	
		For >10 To 25, Deduct	*-19.39*	
		For >25, Deduct	*-29.09*	
09 91 23 00-0284	EA	>26 To 34 SF Window Size, 1 Coat Primer And Two Coats Paint, Brush Work, Interior Metal Window Including Trim, Brush/Roller Work	214.99	
		For Oil Based Paint, Add	*13.22*	
		For Electrostatic Painting, Add	*28.92*	
		For >5 To 10, Deduct	*-10.75*	
		For >10 To 25, Deduct	*-21.50*	
		For >25, Deduct	*-32.25*	
09 91 23 00-0285	SF	>34 SF Window Size, 1 Coat Primer And Two Coats Paint, Brush Work, Interior Metal Window Including Trim, Brush/Roller Work	6.82	
		For Oil Based Paint, Add	*0.42*	
		For Electrostatic Painting, Add	*0.92*	
09 91 23 00-0286		**Paint Interior Wood Windows** *(09 91 23 00-0245)*		
		Note: Two finish coats paint over primer.		
09 91 23 00-0287	EA	Up To 8 SF Window Size, 1 Coat Primer And Two Coats Paint, Brush Work, Interior Wood Windows Including Trim, Brush/Roller Work	97.84	
		For Oil Based Paint, Add	*5.48*	
		For >5 To 10, Deduct	*-4.89*	
		For >10 To 25, Deduct	*-9.78*	
		For >25, Deduct	*-14.68*	
09 91 23 00-0288	EA	>8 To 14 SF Window Size, 1 Coat Primer And Two Coats Paint, Brush Work, Interior Wood Windows Including Trim, Brush/Roller Work	117.49	
		For Oil Based Paint, Add	*6.79*	
		For >5 To 10, Deduct	*-5.87*	
		For >10 To 25, Deduct	*-11.75*	
		For >25, Deduct	*-17.62*	
09 91 23 00-0289	EA	>14 To 20 SF Window Size, 1 Coat Primer And Two Coats Paint, Brush Work, Interior Wood Windows Including Trim, Brush/Roller Work	168.12	
		For Oil Based Paint, Add	*9.70*	
		For >5 To 10, Deduct	*-8.41*	
		For >10 To 25, Deduct	*-16.81*	
		For >25, Deduct	*-25.22*	
09 91 23 00-0290	EA	>20 To 26 SF Window Size, 1 Coat Primer And Two Coats Paint, Brush Work, Interior Wood Windows Including Trim, Brush/Roller Work	189.31	
		For Oil Based Paint, Add	*10.93*	
		For >5 To 10, Deduct	*-9.47*	
		For >10 To 25, Deduct	*-18.93*	
		For >25, Deduct	*-28.40*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0291	EA	>26 To 34 SF Window Size, 1 Coat Primer And Two Coats Paint, Brush Work, Interior Wood Windows Including Trim, Brush/Roller Work	197.65	
		For Oil Based Paint, Add	*11.49*	
		For >5 To 10, Deduct	*-9.88*	
		For >10 To 25, Deduct	*-19.77*	
		For >25, Deduct	*-29.65*	
09 91 23 00-0292	SF	>34 SF Window Size, 1 Coat Primer And Two Coats Paint, Brush Work, Interior Wood Windows Including Trim, Brush/Roller Work	6.60	
		For Oil Based Paint, Add	*0.38*	

09 91 23 00-0293 Paint Interior Security Screens *(09 91 23 00-0245)*

09 91 23 00-0294	SF	1 Coat Primer, Brush/Roller Work, Paint Interior Security Screen	1.68	
		For Oil Based Paint, Add	*0.10*	
		For Electrostatic Painting, Add	*0.23*	
09 91 23 00-0295	SF	1 Coat Paint, Brush/Roller Work, Paint Interior Security Screen	1.70	
		For Oil Based Paint, Add	*0.10*	
		For Electrostatic Painting, Add	*0.21*	
09 91 23 00-0296	SF	2 Coats Paint, Brush/Roller Work, Paint Interior Security Screen	2.82	
		For Oil Based Paint, Add	*0.17*	
		For Electrostatic Painting, Add	*0.36*	

09 91 23 00-0297 Paint Interior Window Guards *(09 91 23 00-0245)*

09 91 23 00-0298	SF	1 Coat Primer, Brush/Roller Work, Paint Interior Metal Window Guards	1.68	
		For Oil Based Paint, Add	*0.10*	
09 91 23 00-0299	SF	1 Coat Paint, Brush/Roller Work, Paint Interior Metal Window Guards	1.70	
		For Oil Based Paint, Add	*0.10*	
09 91 23 00-0300	SF	2 Coats Paint, Brush/Roller Work, Paint Interior Metal Window Guards	2.82	
		For Oil Based Paint, Add	*0.17*	

09 91 23 00-0301 Paint Interior Window Trim *(09 91 23 00-0245)*

09 91 23 00-0302	LF	1 Coat Primer, Brush/Roller Work, Paint Interior Wood Window Frame And Trim	1.58	
		For Oil Based Paint, Add	*0.10*	
		For Painting One Face Of Frame Only, Deduct	*-0.45*	
09 91 23 00-0303	LF	1 Coat Paint, Brush/Roller Work, Paint Interior Wood Window Frame And Trim	1.58	
		For Oil Based Paint, Add	*0.10*	
		For Painting One Face Of Frame Only, Deduct	*-0.45*	
09 91 23 00-0304	LF	2 Coats Paint, Brush/Roller Work, Paint Interior Wood Window Frame And Trim	3.45	
		For Oil Based Paint, Add	*0.21*	
		For Painting One Face Of Frame Only, Deduct	*-0.96*	
09 91 23 00-0305	LF	1 Coat Primer, Brush/Roller Work, Paint Interior Metal Window Frame And Trim Note: Brush/roller work.	1.84	
		For Painting One Face Of Frame Only, Deduct	*-0.55*	
09 91 23 00-0306	LF	1 Coat Paint, Brush/Roller Work, Paint Interior Metal Window Frame And Trim Note: Brush/roller work.	1.84	
		For Painting One Face Of Frame Only, Deduct	*-0.55*	
09 91 23 00-0307	LF	2 Coats Paint, Brush/Roller Work, Paint Interior Metal Window Frame And Trim Note: Brush/roller work.	3.98	
		For Painting One Face Of Frame Only, Deduct	*-1.18*	

09 91 23 00-0308 Paint Interior Cabinets And Casework *(09 91 23)*

09 91 23 00-0309 Paint Interior Wood Cabinets And Casework *(09 91 23 00-0308)*

09 91 23 00-0310	SF	1 Coat Paint, Brush/Roller Work, Paint Interior Wood Cabinets And Casework	1.42	
		For >5,000 To 10,000, Deduct	*-0.07*	
		For >10,000 To 20,000, Deduct	*-0.14*	
		For >20,000, Deduct	*-0.21*	
09 91 23 00-0311	SF	1 Coat Enamel Primer And 1 Coat Alkyd Or Latex Paint, Brush/Roller Work, Paint Interior Wood Cabinets And Casework	1.94	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.19*	
		For >20,000, Deduct	*-0.29*	
09 91 23 00-0312	SF	1 Coat Enamel Primer And 2 Coats Alkyd Or Latex Paint, Brush/Roller Work, Paint Interior Wood Cabinets And Casework	3.19	
		For >5,000 To 10,000, Deduct	*-0.16*	
		For >10,000 To 20,000, Deduct	*-0.32*	
		For >20,000, Deduct	*-0.48*	

09 91 23 00-0313 Paint Exposed Metal Lockers And Cabinets *(09 91 23 00-0308)*

09 91 23 00-0314	SF	1 Coat Primer, Brush/Roller Work, Paint Exposed Metal Locker	1.57	
		For >5,000 To 10,000, Deduct	*-0.08*	
		For >10,000 To 20,000, Deduct	*-0.16*	
		For >20,000, Deduct	*-0.24*	
09 91 23 00-0315	SF	1 Coat Alkyd Enamel Paint, Brush/Roller Work, Paint Exposed Metal Locker	1.57	
		For >5,000 To 10,000, Deduct	*-0.08*	
		For >10,000 To 20,000, Deduct	*-0.16*	
		For >20,000, Deduct	*-0.24*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0316	SF	2 Coats Alkyd Enamel Paint, Brush/Roller Work, Paint Exposed Metal Locker	2.90	
		For >5,000 To 10,000, Deduct	*-0.15*	
		For >10,000 To 20,000, Deduct	*-0.29*	
		For >20,000, Deduct	*-0.44*	
09 91 23 00-0317		**Paint Interior Stairs** *(09 91 23)*		
09 91 23 00-0318		**Paint Interior Concrete Stairs** *(09 91 23 00-0317)*		
		Note: Includes the riser and tread.		
09 91 23 00-0319	RSR	1 Coat Primer, Brush/Roller Work, Paint Up To 4' Wide Interior Concrete Stair	20.28	
09 91 23 00-0320	RSR	1 Coat Alkyd Enamel Paint, Brush/Roller Work, Paint Up To 4' Wide Interior Concrete Stair	20.28	
09 91 23 00-0321	RSR	1 Coat Non-Slip Paint, Brush/Roller Work, Paint Up To 4' Wide Interior Concrete Stair	17.00	
		Note: Excludes riser.		
09 91 23 00-0322	RSR	1 Coat Non-Slip Epoxy Paint, Brush/Roller Work, Paint Up To 4' Wide Interior Concrete Stair	35.42	
		Note: Excludes riser.		
09 91 23 00-0323	RSR	2 Coats Alkyd Enamel Paint, Brush/Roller Work, Paint Up To 4' Wide Interior Concrete Stair	40.57	
09 91 23 00-0324		**Paint Interior Metal Stairs** *(09 91 23 00-0317)*		
		Note: Includes the riser and tread.		
09 91 23 00-0325	RSR	1 Coat Primer, Brush/Roller Work, Paint Up To 4' Wide Interior Metal Stair	11.23	
09 91 23 00-0326	RSR	1 Coat Alkyd Enamel Paint, Brush/Roller Work, Paint Up To 4' Wide Interior Metal Stair	10.82	
09 91 23 00-0327	RSR	2 Coats Alkyd Enamel Paint, Brush/Roller Work, Paint Up To 4' Wide Interior Metal Stair	21.62	
09 91 23 00-0328		**Paint Interior Wood Stairs** *(09 91 23 00-0317)*		
		Note: Includes the riser and tread.		
09 91 23 00-0329	RSR	1 Coat Primer, Brush/Roller Work, Paint Up To 4' Wide Interior Wood Stair	10.47	
09 91 23 00-0330	RSR	1 Coat Alkyd Enamel Paint, Brush/Roller Work, Paint Up To 4' Wide Interior Wood Stair	10.46	
09 91 23 00-0331	RSR	1 Coat Non-Slip Paint, Brush/Roller Work, Paint Up To 4' Wide Interior Wood Stair	12.08	
		Note: Excludes riser.		
09 91 23 00-0332	RSR	1 Coat Non-Slip Epoxy Paint, Brush/Roller Work, Paint Up To 4' Wide Interior Wood Stair	30.50	
		Note: Excludes riser.		
09 91 23 00-0333	RSR	2 Coats Alkyd Enamel Paint, Brush/Roller Work, Paint Up To 4' Wide Interior Wood Stair	20.92	
09 91 23 00-0334		**Paint Interior Stair Nosing** *(09 91 23 00-0317)*		
09 91 23 00-0335	LF	1 Coat Paint, Up To 2", Non-Slip, Brush Work, Paint Interior Yellow Stair Safety Strip	1.75	
09 91 23 00-0336		**Paint Interior Trim** *(09 91 23)*		
09 91 23 00-0337		**Paint Interior Metal Trim** *(09 91 23 00-0336)*		
09 91 23 00-0338	SF	1 Coat Primer, Brush Work, Paint Interior Exposed Metal Trim	1.41	
		For Work >15' To 20' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.29*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.46*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.63*	
		Note: Applied only to work area above 40'.		
09 91 23 00-0339	SF	1 Coat Paint, Brush Work, Paint Interior Exposed Metal Trim	1.54	
		For Work >15' To 20' Above Floor, Add	*0.19*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.51*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.70*	
		Note: Applied only to work area above 40'.		
09 91 23 00-0340	SF	2 Coats Paint, Brush Work, Paint Interior Exposed Metal Trim	2.79	
		For Work >15' To 20' Above Floor, Add	*0.34*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.57*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.91*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.25*	
		Note: Applied only to work area above 40'.		
09 91 23 00-0341	SF	1 Coat Primer, Brush/Roller Work, Paint Interior Exposed Metal Trim	1.19	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.37*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.51*	
		Note: Applied only to work area above 40'.		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0342	SF	1 Coat Paint, Brush/Roller Work, Paint Interior Exposed Metal Trim	1.29	
		For Work >15' To 20' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.41*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.57*	
		Note: Applied only to work area above 40'.		
09 91 23 00-0343	SF	2 Coats Paint, Brush/Roller Work, Paint Interior Exposed Metal Trim	2.33	
		For Work >15' To 20' Above Floor, Add	*0.27*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.45*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.72*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.00*	
		Note: Applied only to work area above 40'.		

09 91 23 00-0344 Paint Interior Wood Trim *(09 91 23 00-0336)*

09 91 23 00-0345	LF	1 Coat Primer, Brush Work, Paint Interior Wood Trim To 6" Wide	0.87	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.20*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.43*	
		Note: Applied only to work area above 40'.		
		For Oil Based Paint, Add	*0.05*	
09 91 23 00-0346	LF	1 Coat Paint, Brush Work, Paint Interior Wood Trim To 6" Wide	0.97	
		For Work >15' To 20' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.35*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.48*	
		Note: Applied only to work area above 40'.		
		For Oil Based Paint, Add	*0.05*	
09 91 23 00-0347	LF	2 Coats Paint, Brush Work, Paint Interior Wood Trim To 6" Wide	2.02	
		For Work >15' To 20' Above Floor, Add	*0.28*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.47*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.76*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.04*	
		Note: Applied only to work area above 40'.		
		For Oil Based Paint, Add	*0.11*	
09 91 23 00-0348	SF	1 Coat Primer, Brush Work, Paint Interior Wood Trim	2.70	
		For Work >15' To 20' Above Floor, Add	*0.35*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.59*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.94*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.30*	
		Note: Applied only to work area above 40'.		
		For Oil Based Paint, Add	*0.15*	
09 91 23 00-0349	SF	1 Coat Paint, Brush Work, Paint Interior Wood Trim	3.00	
		For Work >15' To 20' Above Floor, Add	*0.39*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.66*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*1.05*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.44*	
		Note: Applied only to work area above 40'.		
		For Oil Based Paint, Add	*0.17*	
09 91 23 00-0350	SF	2 Coats Paint, Brush Work, Paint Interior Wood Trim	5.43	
		For Work >15' To 20' Above Floor, Add	*0.70*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*1.17*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*1.87*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*2.57*	
		Note: Applied only to work area above 40'.		
		For Oil Based Paint, Add	*0.31*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0351	SF	1 Coat Primer, Brush/Roller Work, Paint Interior Wood Trim	2.22	
		For Work >15' To 20' Above Floor, Add	*0.28*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.47*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.75*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.03*	
		Note: Applied only to work area above 40'.		
		For Oil Based Paint, Add	*0.13*	
09 91 23 00-0352	SF	1 Coat Paint, Brush/Roller Work, Paint Interior Wood Trim	2.48	
		For Work >15' To 20' Above Floor, Add	*0.32*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.53*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.84*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*1.16*	
		Note: Applied only to work area above 40'.		
		For Oil Based Paint, Add	*0.14*	
09 91 23 00-0353	SF	2 Coats Paint, Brush/Roller Work, Paint Interior Wood Trim	4.46	
		For Work >15' To 20' Above Floor, Add	*0.56*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.93*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*1.48*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*2.04*	
		Note: Applied only to work area above 40'.		
		For Oil Based Paint, Add	*0.26*	

09 91 23 00-0354 Paint Interior Metal Surfaces *(09 91 23)*

09 91 23 00-0355 Paint Interior Miscellaneous Metal Surfaces *(09 91 23 00-0354)*

09 91 23 00-0356	SF	1 Coat Alkyd Anticorrosive Metal Primer, Brush/Roller Work, Paint Interior Miscellaneous Metal Surfaces	0.97	
		For Electrostatic Painting, Add	*0.14*	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.18*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.28*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.39*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.57*	
		For >100 To 250, Add	*0.27*	
		For >250 To 500, Add	*0.12*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.15*	
		For >20,000, Deduct	*-0.19*	
09 91 23 00-0357	SF	1 Coat Alkyd Enamel Paint, Brush/Roller Work, Paint Interior Miscellaneous Metal Surfaces	1.17	
		For Electrostatic Painting, Add	*0.16*	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.50*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.72*	
		For >100 To 250, Add	*0.34*	
		For >250 To 500, Add	*0.15*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.12*	
		For >10,000 To 20,000, Deduct	*-0.18*	
		For >20,000, Deduct	*-0.23*	
09 91 23 00-0358	SF	2 Coats Alkyd Enamel Paint, Brush/Roller Work, Paint Interior Miscellaneous Metal Surfaces	2.03	
		For Electrostatic Painting, Add	*0.27*	
		For Work >15' To 20' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.39*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.62*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.86*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.24*	
		For >100 To 250, Add	*0.59*	
		For >250 To 500, Add	*0.26*	
		For >2,500 To 5,000, Deduct	*-0.10*	
		For >5,000 To 10,000, Deduct	*-0.20*	
		For >10,000 To 20,000, Deduct	*-0.30*	
		For >20,000, Deduct	*-0.41*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0359	SF	1 Coat Alkyd Anticorrosive Metal Primer, Sprayed, Paint Interior Miscellaneous Metal Surfaces	1.30	
		For Electrostatic Painting, Add	*0.18*	
		For Work >15' To 20' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.25*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.40*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.55*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.80*	
		For >100 To 250, Add	*0.38*	
		For >250 To 500, Add	*0.17*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.20*	
		For >20,000, Deduct	*-0.26*	
09 91 23 00-0360	SF	1 Coat Alkyd Enamel Paint, Sprayed, Paint Interior Miscellaneous Metal Surfaces	1.30	
		For Electrostatic Painting, Add	*0.18*	
		For Work >15' To 20' Above Floor, Add	*0.15*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.25*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.40*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.55*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.80*	
		For >100 To 250, Add	*0.38*	
		For >250 To 500, Add	*0.17*	
		For >2,500 To 5,000, Deduct	*-0.07*	
		For >5,000 To 10,000, Deduct	*-0.13*	
		For >10,000 To 20,000, Deduct	*-0.20*	
		For >20,000, Deduct	*-0.26*	
09 91 23 00-0361	SF	2 Coats Alkyd Enamel Paint, Sprayed, Paint Interior Miscellaneous Metal Surfaces	2.11	
		For Electrostatic Painting, Add	*0.30*	
		For Work >15' To 20' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.39*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.62*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.85*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*1.25*	
		For >100 To 250, Add	*0.60*	
		For >250 To 500, Add	*0.26*	
		For >2,500 To 5,000, Deduct	*-0.11*	
		For >5,000 To 10,000, Deduct	*-0.21*	
		For >10,000 To 20,000, Deduct	*-0.32*	
		For >20,000, Deduct	*-0.42*	
09 91 23 00-0362	LF	1 Coat Alkyd Enamel, Cut-in Brush Work, Paint Interior Miscellaneous Exposed Metal	0.19	
		For Electrostatic Painting, Add	*0.03*	
		For Work >15' To 20' Above Floor, Add	*0.02*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.04*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*0.06*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.08*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.12*	
		For >100 To 250, Add	*0.06*	
		For >250 To 500, Add	*0.02*	
		For >2,500 To 5,000, Deduct	*-0.01*	
		For >5,000 To 10,000, Deduct	*-0.02*	
		For >10,000 To 20,000, Deduct	*-0.03*	
		For >20,000, Deduct	*-0.04*	

09 91 23 00-0363 Paint Additives *(09 91 23)*

09 91 23 00-0364	SF	Mildewcide/Mold Killing Paint Additive Per Each Coat	0.02	
09 91 23 00-0365	SF	Class "B" Fire Rating, Fire Resistant Paint Additive	0.08	
		For Class "A" Fire Rating, Add	*0.08*	

09 91 23 00-0366 Hand Painting Letters/Numbers *(09 91 23)*

Note: Painting on walls, floors, poles, signs, etc.

09 91 23 00-0367	EA	Up To 1" High, Hand Paint, Per Letter/Number	2.71	
09 91 23 00-0368	EA	1" To 2" High, Hand Paint, Per Letter/Number	3.15	
09 91 23 00-0369	EA	2" To 3" High, Hand Paint, Per Letter/Number	4.78	
09 91 23 00-0370	EA	3" To 4" High, Hand Paint, Per Letter/Number	5.84	
09 91 23 00-0371	EA	4" To 6" High, Hand Paint, Per Letter/Number	8.06	
09 91 23 00-0372	EA	6" To 12" High, Hand Paint, Per Letter/Number	10.20	
09 91 23 00-0373	EA	Over 12" High, Hand Paint, Per Letter/Number	11.96	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

09 91 23 00-0374 Glove/Mitt Application *(09 91 23)*

09 91 23 00-0375 Conduit/Pipe *(09 91 23 00-0374)*

09 91 23 00-0376	CSF	Acid Wash (Muriatic Acid) Conduit Or Pipe With Glove/Mitt	51.19	
		For Work >15' To 20' Above Floor, Add	*7.15*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*11.92*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*19.06*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*26.21*	
		Note: Applied only to work area above 40'.		
09 91 23 00-0377	CSF	Metal Primer Conduit Or Pipe With Glove/Mitt	85.73	
		For Work >15' To 20' Above Floor, Add	*8.58*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*14.30*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*22.88*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*31.46*	
		Note: Applied only to work area above 40'.		
09 91 23 00-0378	CSF	Enamel Paint, Oil Base Paint, First Coat Conduit Or Pipe With Glove/Mitt	67.64	
		For Work >15' To 20' Above Floor, Add	*6.29*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*10.49*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*16.78*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*23.07*	
		Note: Applied only to work area above 40'.		
09 91 23 00-0379	CSF	Enamel Paint, Oil Base Paint, Second Coat Conduit Or Pipe With Glove/Mitt	55.53	
		For Work >15' To 20' Above Floor, Add	*4.72*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*7.87*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*12.58*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*17.30*	
		Note: Applied only to work area above 40'.		
09 91 23 00-0380	CSF	Epoxy Paint, First Coat Conduit Or Pipe With Glove/Mitt	105.70	
		For Work >15' To 20' Above Floor, Add	*7.15*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*11.92*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*19.06*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*26.21*	
		Note: Applied only to work area above 40'.		
09 91 23 00-0381	CSF	Epoxy Paint, Second Coat Conduit Or Pipe With Glove/Mitt	97.58	
		For Work >15' To 20' Above Floor, Add	*6.29*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*10.49*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*16.78*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*23.07*	
		Note: Applied only to work area above 40'.		

09 91 23 00-0382 Ductwork *(09 91 23 00-0374)*

09 91 23 00-0383	CSF	Acid Wash (Muriatic Acid) Ductwork With Glove/Mitt	51.19	
		For Work >15' To 20' Above Floor, Add	*7.15*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*11.92*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*19.06*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*26.21*	
		Note: Applied only to work area above 40'.		
09 91 23 00-0384	CSF	Metal Primer Ductwork With Glove/Mitt	83.12	
		For Work >15' To 20' Above Floor, Add	*7.15*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*11.92*	
		Note: Applied only to work area above 20' to 30'.		
		For Work >30' To 40' Above Floor, Add	*19.06*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*26.21*	
		Note: Applied only to work area above 40'.		

copyright 2026 The Gordian Group, Inc.

	MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 23 00-0385		CSF	Enamel Paint, Oil Base Paint Ductwork With Glove/Mitt	61.46	
			For Work >15' To 20' Above Floor, Add	*5.72*	
			Note: Applied only to work area above 15' to 20'.		
			For Work >20' To 30' Above Floor, Add	*9.53*	
			Note: Applied only to work area above 20' to 30'.		
			For Work >30' To 40' Above Floor, Add	*15.25*	
			Note: Applied only to work area above 30' to 40'.		
			For Work >40' Above Floor, Add	*20.97*	
			Note: Applied only to work area above 40'.		
09 91 23 00-0386		CSF	Epoxy Paint, First Coat Ductwork With Glove/Mitt	101.53	
			For Work >15' To 20' Above Floor, Add	*7.15*	
			Note: Applied only to work area above 15' to 20'.		
			For Work >20' To 30' Above Floor, Add	*11.92*	
			Note: Applied only to work area above 20' to 30'.		
			For Work >30' To 40' Above Floor, Add	*19.06*	
			Note: Applied only to work area above 30' to 40'.		
			For Work >40' Above Floor, Add	*26.21*	
			Note: Applied only to work area above 40'.		
09 91 23 00-0387		CSF	Epoxy Paint, Second Coat Ductwork With Glove/Mitt	88.63	
			For Work >15' To 20' Above Floor, Add	*5.72*	
			Note: Applied only to work area above 15' to 20'.		
			For Work >20' To 30' Above Floor, Add	*9.53*	
			Note: Applied only to work area above 20' to 30'.		
			For Work >30' To 40' Above Floor, Add	*15.25*	
			Note: Applied only to work area above 30' to 40'.		
			For Work >40' Above Floor, Add	*20.97*	
			Note: Applied only to work area above 40'.		

09 91 23 00-0388 Stencil Painting Letters/Numbers *(09 91 23)*

Note: Painting on walls, floors, poles, etc. Includes stencil cutout and paint.

09 91 23 00-0389		EA	Up To 1" High, Stencil Painting, Per Letter/Number	2.21	
			For >200 To 500, Deduct	*-0.18*	
			For >500 To 1,000, Deduct	*-0.28*	
			For >1,000 To 2,000, Deduct	*-0.35*	
			For >2,000, Deduct	*-0.44*	
09 91 23 00-0390		EA	1" To 2" High, Stencil Painting, Per Letter/Number	2.56	
			For >200 To 500, Deduct	*-0.20*	
			For >500 To 1,000, Deduct	*-0.32*	
			For >1,000 To 2,000, Deduct	*-0.41*	
			For >2,000, Deduct	*-0.51*	
09 91 23 00-0391		EA	2" To 3" High, Stencil Painting, Per Letter/Number	4.30	
			For >200 To 500, Deduct	*-0.34*	
			For >500 To 1,000, Deduct	*-0.54*	
			For >1,000 To 2,000, Deduct	*-0.69*	
			For >2,000, Deduct	*-0.86*	
09 91 23 00-0392		EA	3" To 4" High, Stencil Painting, Per Letter/Number	5.29	
			For >200 To 500, Deduct	*-0.42*	
			For >500 To 1,000, Deduct	*-0.66*	
			For >1,000 To 2,000, Deduct	*-0.85*	
			For >2,000, Deduct	*-1.06*	
09 91 23 00-0393		EA	4" To 6" High, Stencil Painting, Per Letter/Number	7.28	
			For >200 To 500, Deduct	*-0.58*	
			For >500 To 1,000, Deduct	*-0.91*	
			For >1,000 To 2,000, Deduct	*-1.16*	
			For >2,000, Deduct	*-1.46*	
09 91 23 00-0394		EA	6" To 12" High, Stencil Painting, Per Letter/Number	9.66	
			For >200 To 500, Deduct	*-0.77*	
			For >500 To 1,000, Deduct	*-1.21*	
			For >1,000 To 2,000, Deduct	*-1.55*	
			For >2,000, Deduct	*-1.93*	
09 91 23 00-0395		EA	Over 12" High, Stencil Painting, Per Letter/Number	11.38	
			For >200 To 500, Deduct	*-0.91*	
			For >500 To 1,000, Deduct	*-1.42*	
			For >1,000 To 2,000, Deduct	*-1.82*	
			For >2,000, Deduct	*-2.28*	

09 91 33 Painting Materials *(09 91)*

Note: Paint per gallon for owners to obtain extra paint. Not to be used in conjunction with other painting tasks.

09 91 33 00-0001 Primer *(09 91 33)*

09 91 33 00-0002		GAL	Alkyd Primer/Sealer, Interior, 500 SF Per Gallon	67.54
09 91 33 00-0003		GAL	Alkyd Wood Primer, Exterior, 400 SF Per Gallon	43.03
09 91 33 00-0004		GAL	Prime Coat Oil Wood Primer, 310 SF Per Gallon	54.57
09 91 33 00-0005		GAL	Catalyzed Epoxy Primer, Two Component Type, 425 SF Per Gallon	154.56
09 91 33 00-0006		EA	Cement Base Primer, 25 Lb. Sack	45.00
09 91 33 00-0007		GAL	Alkali Resistant Concrete And Masonry Primer, Exterior, 225 SF Per Gallon	69.38
09 91 33 00-0008		GAL	Alkali Resistant Concrete And Masonry Primer, Interior, 225 SF Per Gallon	55.69
09 91 33 00-0009		GAL	Acrylic Latex Primer, Flat Exterior, Fast Drying Wood Undercoat And Back Primer, 400 SF per Gallon	43.03
09 91 33 00-0010		GAL	Acrylic (Vinyl Acrylic) Block Filler, 50 SF Per Gallon	39.10
09 91 33 00-0011		GAL	Acrylic (Vinyl Acrylic) Rust Inhibiting Metal, Primer - 500 SF Per Gallon: Paint - 260 SF Per Gallon	68.91
09 91 33 00-0012		GAL	Acrylic Heavy-Duty Wall Primer/Sealer, Low Odor Type, Alkali-Resistant, 800 SF Per Gallon	57.38
09 91 33 00-0013		GAL	Acrylic (Vinyl Acrylic) Undercoat, All Purpose, Interior/Exterior, 500 SF Per Gallon	57.38
09 91 33 00-0014		GAL	Latex Wood Primer, Exterior, 300 SF Per Gallon	64.69
09 91 33 00-0015		GAL	Linseed (Oil Base) Primer, Exterior/Interior, 300 SF Per Gallon	42.19

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 91 33 00-0016	GAL	Red Alkyd Primer, 500 SF Per Gallon	115.59	
09 91 33 00-0017	GAL	Wood Sealer/Primer, Interior, Clear, 600 SF Per Gallon	45.00	
09 91 33 00-0018	GAL	Zinc Chromate Primer, 300 SF Per Gallon	36.00	
09 91 33 00-0019	GAL	Zinc Dust/Zinc Oxide Primer, 300 SF Per Gallon	93.10	
09 91 33 00-0020	GAL	Stain Killer, Alcohol Base	58.05	
09 91 33 00-0021	GAL	Sealer, Primer Kilz, 400 SF Per Gallon	65.50	
09 91 33 00-0022		Paint *(09 91 33)*		
09 91 33 00-0023	GAL	Aluminum Fiber Roof Coat On Composition Roof, 50 SF Per Gallon	31.50	
09 91 33 00-0024	GAL	Acrylic Urethane Sealer	156.20	
09 91 33 00-0025	GAL	Asphalt-Fiber Roof And Foundation Coating, Solvent Type Note: 75 SF per gallon on roof or concrete, 100 SF per gallon on metal.	16.88	
09 91 33 00-0026	GAL	Concrete Enamel Epoxy, 350 SF Per Gallon	97.60	
09 91 33 00-0027	GAL	Concrete Acrylic Sealer, 400 SF Per Gallon	51.19	
09 91 33 00-0028	GAL	Tar Emulsion, Driveway Coating, 120 SF Per Gallon	22.41	
09 91 33 00-0029	GAL	Acrylic Latex, Driveway Coating, 250 SF Per Gallon	33.99	
09 91 33 00-0030	GAL	Exterior, Oil Base, Gloss Enamel, 400 SF Per Gallon	92.71	
09 91 33 00-0031	GAL	Exterior, Oil Base, Gloss, 400 SF Per Gallon	91.52	
09 91 33 00-0032	GAL	Exterior, Oil Base, Semi-Gloss, 400 SF Per Gallon	74.71	
09 91 33 00-0033	GAL	Exterior, Flat, Oil Base	68.48	
09 91 33 00-0034	GAL	Exterior, Latex, Semi-Gloss, 400 SF Per Gallon	65.00	
09 91 33 00-0035	GAL	Exterior, Flat Latex, Trim Paint, 500 SF Per Gallon	76.58	
09 91 33 00-0036	GAL	Exterior, Latex Flat Paint, 300 SF Per Gallon	67.99	
09 91 33 00-0037	GAL	Exterior, Water Base, Latex Gloss Enamel	96.78	
09 91 33 00-0038	GAL	Cold Galvanizing Paint	372.72	
09 91 33 00-0039	GAL	High Heat Paint	163.65	
09 91 33 00-0040	GAL	Heat Resistant Paint	109.10	
09 91 33 00-0041	GAL	Zinc Chromate Paint	98.71	
09 91 33 00-0042	QT	Anti-Rust Enamel, 500 SF Per Quart	38.96	
09 91 33 00-0043	GAL	Rust Inhibitor, Ferrous Metal	109.10	
09 91 33 00-0044	GAL	Masonry Waterproofing, 100 SF Per Gallon	67.99	
09 91 33 00-0045	GAL	Alkyd Latex, Black	80.96	
09 91 33 00-0046	GAL	Alkyd Latex, White	73.60	
09 91 33 00-0047	GAL	Alkyd Latex, Colors	88.75	
09 91 33 00-0048	QT	Wrought Iron Paint, Black	99.58	
09 91 33 00-0049	GAL	Vinyl Paint	86.07	
09 91 33 00-0050	GAL	Silicone Alkyd	104.63	
09 91 33 00-0051	GAL	2 Component Solvent Based Acrylic Epoxy	106.32	
09 91 33 00-0052	GAL	2 Component Solvent Based Polyester Epoxy	133.32	
09 91 33 00-0053	GAL	Chlorinated Rubber	97.88	
09 91 33 00-0054	GAL	Polyamide Epoxy Sealer	101.26	
09 91 33 00-0055	GAL	Coal Tar Epoxy	72.57	
09 91 33 00-0056	GAL	Swimming Pool Enamel, 350 SF Per Gallon	90.57	
09 91 33 00-0057	GAL	Swimming Pool Epoxy Or Urethane Base	118.13	
09 91 33 00-0058	GAL	Swimming Pool Rubber Base	81.00	
09 91 33 00-0059	GAL	Interior, Latex Flat Paint, 300 SF Per Gallon	51.47	
09 91 33 00-0060	GAL	Interior, Latex Eggshell Or Semi-Gloss Enamel, 300 SF Per Gallon	63.43	
09 91 33 00-0061	GAL	Interior, Fire-Retardant Flat Paint, 200 SF Per Gallon	105.47	
09 91 33 00-0062	GAL	Interior, Ceiling White Latex Flat, 350 SF Per Gallon	35.72	
09 91 33 00-0063	GAL	Linseed Oil	31.22	
09 91 33 00-0064	GAL	Latex Floor Paint, 300 SF Per Gallon	51.19	
09 91 33 00-0065	GAL	Acrylic Floor Paint, 400 SF Per Gallon	57.66	
09 91 33 00-0066	GAL	Textured Paint, Sand Texture Latex, Armor Coat, 100 SF Per Gallon	52.74	
09 91 33 00-0067	GAL	Acoustic Spray-On Texture, Finish	42.38	
09 91 33 00-0068		Stain, Varnish *(09 91 33)*		
09 91 33 00-0069	GAL	Thompson Water Sealer, 150 SF Per Gallon	29.25	
09 91 33 00-0070	GAL	Latex Redwood Stain, Water Base, 300 SF Per Gallon	54.57	
09 91 33 00-0071	GAL	Redwood Oil Stain, 300 SF Per Gallon	48.66	
09 91 33 00-0072	GAL	Varnish, Clear	47.44	
09 91 33 00-0073	GAL	Penetrating Water-Repellent Stain	34.45	
09 91 33 00-0074	GAL	Redwood Hue Or Clear Stain	30.79	
09 91 33 00-0075	GAL	Polyurethane	54.06	
09 91 33 00-0076	GAL	Lacquer, Semi-Gloss	51.34	
09 91 33 00-0077	GAL	Shellac, Clear	67.35	
09 91 33 00-0078	GAL	Acetone	22.22	
09 91 33 00-0079	GAL	Paint Thinner	5.48	
09 91 33 00-0080	GAL	Shellac Or Lacquer Thinner	22.50	
09 91 33 00-0081	GAL	Turpentine	30.94	
09 91 33 00-0082	GAL	Wood Filler Paste	52.88	
09 91 33 00-0083	GAL	Wood Preservative, Pentachlorophenol, General Purpose, 40%, 150 SF Per Gallon	42.19	
09 91 33 00-0084	GAL	Water Based Alkyd Urethane (Sherwin Williams B53W01153)	109.22	

09 91 43 Surface Preparation *(09 91)*

See CSI section 09 01 90 52-0000 for preparation on painted or unpainted surfaces.

09 93 Staining and Transparent Finishing *(09 90)*

Note: Includes light sanding or screening between coats.

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 93 13		**Exterior Staining and Finishing** *(09 93)*		
09 93 13 53		**Exterior Finishing** *(09 93 13)*		
09 93 13 53-0001		Stain Sealer *(09 93 13 53)*		
		Note: Measured by surface area of wall or ceiling.		
09 93 13 53-0002	SF	Stain Sealer, Brush Work	1.06	
		For Ceiling Work, Add	*0.14*	
		For >5,000 To 10,000, Deduct	*-0.03*	
		For >10,000 To 20,000, Deduct	*-0.06*	
		For >20,000, Deduct	*-0.09*	
09 93 13 53-0003	SF	Stain Sealer, Brush/Roller Work	0.85	
		For Ceiling Work, Add	*0.11*	
		For >5,000 To 10,000, Deduct	*-0.02*	
		For >10,000 To 20,000, Deduct	*-0.05*	
		For >20,000, Deduct	*-0.07*	
09 93 13 53-0004	SF	Stain Sealer, Sprayed	0.34	
		For Ceiling Work, Add	*0.03*	
		For >5,000 To 10,000, Deduct	*-0.01*	
		For >10,000 To 20,000, Deduct	*-0.02*	
		For >20,000, Deduct	*-0.04*	
09 93 23		**Interior Staining and Finishing** *(09 93)*		
		Note: VOC compliant in all regulated areas, review specifications for levels.		
09 93 23 13		**Interior Staining** *(09 93 23)*		
09 93 23 13-0001		Stain Wood Trim *(09 93 23 13)*		
09 93 23 13-0002	LF	Stain Wood Trim, Up To 6" Wide, 1 Coat Stain, With Brush And Wipe Off	1.29	
		For Up To 100, Add	*0.91*	
		For >100 To 250, Add	*0.43*	
		For >250 To 500, Add	*0.18*	
		For >4,000, Deduct	*-0.06*	
09 93 23 13-0003	SF	Stain Wood Trim, 1 Coat Stain, With Brush And Wipe Off	1.91	
		For Up To 100, Add	*1.34*	
		For >100 To 250, Add	*0.63*	
		For >250 To 500, Add	*0.27*	
		For >4,000, Deduct	*-0.10*	
09 93 23 13-0004		Stain Wood Floor *(09 93 23 13)*		
09 93 23 13-0005	SF	Stain Or Varnish Wood Floor, 1 Coat Stain, Brush Work	0.62	
		For Up To 100, Add	*0.37*	
		For >100 To 250, Add	*0.18*	
		For >250 To 500, Add	*0.08*	
		For >4,000, Deduct	*-0.03*	
09 93 23 13-0006	SF	Stain Or Varnish Wood Floor, 1 Coat Stain, Brush/Roller Work	0.47	
		For Up To 100, Add	*0.26*	
		For >100 To 250, Add	*0.12*	
		For >250 To 500, Add	*0.05*	
		For >4,000, Deduct	*-0.02*	
09 93 23 13-0007		Stain Wood Door And Window *(09 93 23 13)*		
09 93 23 13-0008	EA	Stain Wood Door, 1 Coat Stain With Brush And Wipe Off Wood Door (Per Face)	61.51	
		For Up To 4, Add	*44.69*	
		For >4 To 10, Add	*20.93*	
		For >10 To 20, Add	*8.99*	
		For >160, Deduct	*-3.08*	
09 93 23 13-0009	EA	Stain Wood Window, 1 Coat Stain With Brush And Wipe Off Wood Window And Frame (Per Face)	44.05	
		For Up To 4, Add	*30.91*	
		For >4 To 10, Add	*14.53*	
		For >10 To 20, Add	*6.25*	
		For >160, Deduct	*-2.20*	
09 93 23 13-0010		Stain Wood Cabinet *(09 93 23 13)*		
09 93 23 13-0011	SF	Stain Cabinet, 1 Coat Stain With Brush And Wipe	1.54	
09 93 23 53		**Interior Finishing** *(09 93 23)*		
09 93 23 53-0001		Concrete Finishes *(09 93 23 53)*		
09 93 23 53-0002	SF	Finish Concrete Floor, 1 Coat Polyurethane	0.94	
		For Up To 100, Add	*0.55*	
		For >100 To 250, Add	*0.26*	
		For >250 To 500, Add	*0.12*	
		For >4,000, Deduct	*-0.05*	
09 93 23 53-0003		Wood Trim Finishes *(09 93 23 53)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 93 23 53-0004	SF	Finish Wood Trim, 1 Coat Sealer And 1 Coat Varnish Or Polyurethane	1.58	
		For Up To 100, Add	*1.04*	
		For >100 To 250, Add	*0.49*	
		For >250 To 500, Add	*0.21*	
		For >4,000, Deduct	*-0.08*	
09 93 23 53-0005	SF	Finish Wood Trim, 1 Coat Varnish Or Polyurethane	1.04	
		For Up To 100, Add	*0.71*	
		For >100 To 250, Add	*0.34*	
		For >250 To 500, Add	*0.15*	
		For >4,000, Deduct	*-0.05*	

09 93 23 53-0006 Wood Floor Finishes *(09 93 23 53)*

09 93 23 53-0007	SF	Refinish Wood Floor, 2 Coats Polyurethane Note: Includes sanding existing floor.	4.01	
		For Up To 100, Add	*2.85*	
		For >100 To 250, Add	*1.34*	
		For >250 To 500, Add	*0.57*	
		For >4,000, Deduct	*-0.20*	
09 93 23 53-0008	SF	Polyurethane Wood Floor, 1 Coat Polyurethane, With Wool Applicator Or Brush Work Note: Includes screening between coats.	0.79	
		For Up To 100, Add	*0.51*	
		For >100 To 250, Add	*0.24*	
		For >250 To 500, Add	*0.11*	
		For >4,000, Deduct	*-0.04*	
09 93 23 53-0009	SF	Refinish Wood Floor, 1 Coat Sealer And 2 Coats Polyurethane Note: Includes sanding existing floor.	4.55	
		For Up To 100, Add	*3.21*	
		For >100 To 250, Add	*1.51*	
		For >250 To 500, Add	*0.65*	
		For >4,000, Deduct	*-0.23*	

09 93 23 53-0010 Wood Door And Window Finishes *(09 93 23 53)*

09 93 23 53-0011	EA	Varnish Or Polyurethane Wood Door, 1 Coat Shellac (Per Face)	44.45	
		For Up To 4, Add	*32.20*	
		For >4 To 10, Add	*15.08*	
		For >10 To 20, Add	*6.48*	
		For >160, Deduct	*-2.22*	
09 93 23 53-0012	EA	Varnish Or Polyurethane Wood Door, 3 Coats Shellac, With Light Sanding Between Coats (Per Face)	135.22	
		For Up To 4, Add	*96.17*	
		For >4 To 10, Add	*45.14*	
		For >10 To 20, Add	*19.41*	
		For >160, Deduct	*-6.76*	

09 93 23 53-0013 Cabinet Finishes *(09 93 23 53)*

09 93 23 53-0014	SF	Finish Cabinet, 1 Coat Shellac, Varnish Or Polyurethane	1.55	

09 93 23 53-0015 Gym, Stage And Dance Floor Finishes *(09 93 23 53)*

09 93 23 53-0016	SF	Yearly Maintenance Refinish Of Gym, Stage Or Dance Floor Note: Includes screening, one coat of finish and buffing. Excludes repainting of game lines.	0.96	
09 93 23 53-0017	SF	Finish New Elementary School Wood Gym, Stage Or Dance Floor Note: Includes sanding to level, vacuuming, tack cloth wiping, seal coat, light sanding between coats, painting of all game lines, logos, court markings and solid paint areas, seal and finish coats per manufacturer's instructions, minimum four coats total with not less than two finish coats.	4.22	
		For Stage Or Dance Floors, Deduct	*-0.08*	
09 93 23 53-0018	SF	Finish New Middle Or Junior School Wood Gym, Stage Or Dance Floor Note: Includes sanding to level, vacuuming, tack cloth wiping, seal coat, light sanding between coats, painting of all game lines, logos, court markings and solid paint areas, seal and finish coats per manufacturer's instructions, minimum four coats total with not less than two finish coats.	4.32	
		For Stage Or Dance Floors, Deduct	*-0.09*	
09 93 23 53-0019	SF	Finish New High School Wood Gym, Stage Or Dance Floor Note: Includes sanding to level, vacuuming, tack cloth wiping, seal coat, light sanding between coats, painting of all game lines, logos, court markings and solid paint areas, seal and finish coats per manufacturer's instructions, minimum four coats total with not less than two finish coats.	4.41	
		For Stage Or Dance Floors, Deduct	*-0.09*	
09 93 23 53-0020	SF	Refinish Existing Elementary School Wood Gym, Stage Or Dance Floor Note: Includes removal of existing finish and sanding to level, vacuuming, tack cloth wiping, seal coat, light sanding between coats, painting of all game lines, logos, court markings and solid paint areas, seal and finish coats per manufacturer's instructions, minimum four coats total with not less than two finish coats.	4.22	
		For Stage Or Dance Floors, Deduct	*-0.08*	
09 93 23 53-0021	SF	Refinish Existing Middle Or Junior School Wood Gym, Stage Or Dance Floor Note: Includes removal of existing finish and sanding to level, vacuuming, tack cloth wiping, seal coat, light sanding between coats, painting of all game lines, logos, court markings and solid paint areas, seal and finish coats per manufacturer's instructions, minimum four coats total with not less than two finish coats.	4.32	
		For Stage Or Dance Floors, Deduct	*-0.09*	
09 93 23 53-0022	SF	Refinish Existing High School Wood Gym, Stage Or Dance Floor Note: Includes removal of existing finish and sanding to level, vacuuming, tack cloth wiping, seal coat, light sanding between coats, painting of all game lines, logos, court markings and solid paint areas, seal and finish coats per manufacturer's instructions, minimum four coats total with not less than two finish coats.	4.41	
		For Stage Or Dance Floors, Deduct	*-0.09*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	MINOR DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

09 96 High-Performance Coatings *(09 90)*

09 96 23 Graffiti-Resistant Coatings *(09 96)*

09 96 23 00-0001 Anti-Graffiti Coating *(09 96 23)*

09 96 23 00-0002	SF	Sacrificial Anti-Graffiti Coating, Per Coat	1.62	
		For Up To 100, Add	*0.96*	
		For >100 To 250, Add	*0.46*	
		For >250 To 500, Add	*0.20*	
09 96 23 00-0003	SF	Permanent (Non-Sacrificial) Anti-Graffiti Coating, Per Coat	1.73	
		For Up To 100, Add	*0.98*	
		For >100 To 250, Add	*0.47*	
		For >250 To 500, Add	*0.21*	

09 96 53 Elastomeric Coatings *(09 96)*

09 96 53 00-0001 Elastomeric Painting *(09 96 53)*

Note: Per coat.

09 96 53 00-0002	SF	1 Coat, 5.3 To 8 Wet Mils, Brush Work, Elastomeric Primer Applied To Walls And Floors	0.97	
		For Work >15' To 20' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.19*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.31*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.61*	
		For >100 To 250, Add	*0.29*	
		For >250 To 500, Add	*0.13*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.10*	
		For >10,000 To 20,000, Deduct	*-0.15*	
		For >20,000, Deduct	*-0.19*	
09 96 53 00-0003	SF	1 Coat, 5.3 To 8 Wet Mils, Brush/Roller Work, Elastomeric Primer Applied To Walls And Floors	0.83	
		For Work >15' To 20' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.51*	
		For >100 To 250, Add	*0.25*	
		For >250 To 500, Add	*0.11*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.08*	
		For >10,000 To 20,000, Deduct	*-0.12*	
		For >20,000, Deduct	*-0.17*	
09 96 53 00-0004	SF	1 Coat, 5.3 To 8 Wet Mils, Sprayed, Elastomeric Primer Applied To Walls And Floors	0.72	
		For Work >15' To 20' Above Floor, Add	*0.07*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.12*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.19*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.40*	
		For >100 To 250, Add	*0.19*	
		For >250 To 500, Add	*0.08*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.07*	
		For >10,000 To 20,000, Deduct	*-0.11*	
		For >20,000, Deduct	*-0.14*	
09 96 53 00-0005	SF	1 Coat, 13 To 16 Wet Mils, Brush Work, Elastomeric Paint Applied To Walls And Floors	2.12	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.50*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.86*	
		For >100 To 250, Add	*0.44*	
		For >250 To 500, Add	*0.20*	
		For >2,500 To 5,000, Deduct	*-0.11*	
		For >5,000 To 10,000, Deduct	*-0.21*	
		For >10,000 To 20,000, Deduct	*-0.32*	
		For >20,000, Deduct	*-0.42*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 96 53 00-0006	SF	1 Coat, 13 To 16 Wet Mils, Brush/Roller Work, Elastomeric Paint Applied To Walls And Floors	1.97	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.19*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.30*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.75*	
		For >100 To 250, Add	*0.39*	
		For >250 To 500, Add	*0.17*	
		For >2,500 To 5,000, Deduct	*-0.10*	
		For >5,000 To 10,000, Deduct	*-0.20*	
		For >10,000 To 20,000, Deduct	*-0.30*	
		For >20,000, Deduct	*-0.39*	
09 96 53 00-0007	SF	1 Coat, 13 To 16 Wet Mils, Sprayed, Elastomeric Paint Applied To Walls And Floors	2.19	
		For Work >15' To 20' Above Floor, Add	*0.08*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.31*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.66*	
		For >100 To 250, Add	*0.36*	
		For >250 To 500, Add	*0.17*	
		For >2,500 To 5,000, Deduct	*-0.11*	
		For >5,000 To 10,000, Deduct	*-0.22*	
		For >10,000 To 20,000, Deduct	*-0.33*	
		For >20,000, Deduct	*-0.44*	
09 96 53 00-0008	SF	1 Coat, 5.3 To 8 Wet Mils, Brush Work, Elastomeric Primer Applied To Ceilings And Overhead	1.10	
		For Work >15' To 20' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.23*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.50*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.71*	
		For >100 To 250, Add	*0.34*	
		For >250 To 500, Add	*0.15*	
		For >2,500 To 5,000, Deduct	*-0.06*	
		For >5,000 To 10,000, Deduct	*-0.11*	
		For >10,000 To 20,000, Deduct	*-0.17*	
		For >20,000, Deduct	*-0.22*	
09 96 53 00-0009	SF	1 Coat, 5.3 To 8 Wet Mils, Brush/Roller Work, Elastomeric Primer Applied To Ceilings And Overhead	0.94	
		For Work >15' To 20' Above Floor, Add	*0.11*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.19*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.30*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.60*	
		For >100 To 250, Add	*0.28*	
		For >250 To 500, Add	*0.12*	
		For >2,500 To 5,000, Deduct	*-0.05*	
		For >5,000 To 10,000, Deduct	*-0.09*	
		For >10,000 To 20,000, Deduct	*-0.14*	
		For >20,000, Deduct	*-0.19*	
09 96 53 00-0010	SF	1 Coat, 5.3 To 8 Wet Mils, Sprayed, Elastomeric Primer Applied To Ceilings And Overhead	0.79	
		For Work >15' To 20' Above Floor, Add	*0.08*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.14*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.30*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.45*	
		For >100 To 250, Add	*0.22*	
		For >250 To 500, Add	*0.09*	
		For >2,500 To 5,000, Deduct	*-0.04*	
		For >5,000 To 10,000, Deduct	*-0.08*	
		For >10,000 To 20,000, Deduct	*-0.12*	
		For >20,000, Deduct	*-0.16*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 96 53 00-0011	SF	1 Coat, 13 To 16 Wet Mils, Brush Work, Elastomeric Paint Applied To Ceilings And Overhead	2.27	
		For Work >15' To 20' Above Floor, Add	*0.16*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.27*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.42*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.58*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.98*	
		For >100 To 250, Add	*0.49*	
		For >250 To 500, Add	*0.22*	
		For >2,500 To 5,000, Deduct	*-0.11*	
		For >5,000 To 10,000, Deduct	*-0.23*	
		For >10,000 To 20,000, Deduct	*-0.34*	
		For >20,000, Deduct	*-0.45*	
09 96 53 00-0012	SF	1 Coat, 13 To 16 Wet Mils, Brush/Roller Work, Elastomeric Paint Applied To Ceilings And Overhead	2.10	
		For Work >15' To 20' Above Floor, Add	*0.13*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.22*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.49*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.85*	
		For >100 To 250, Add	*0.43*	
		For >250 To 500, Add	*0.19*	
		For >2,500 To 5,000, Deduct	*-0.11*	
		For >5,000 To 10,000, Deduct	*-0.21*	
		For >10,000 To 20,000, Deduct	*-0.32*	
		For >20,000, Deduct	*-0.42*	
09 96 53 00-0013	SF	1 Coat, 13 To 16 Wet Mils, Sprayed, Elastomeric Paint Applied To Ceilings And Overhead	2.29	
		For Work >15' To 20' Above Floor, Add	*0.10*	
		Note: Applied only to work area above 15' to 20'.		
		For Work >20' To 30' Above Floor, Add	*0.17*	
		Note: Applied only to work area above 20'.		
		For Work >30' To 40' Above Floor, Add	*0.26*	
		Note: Applied only to work area above 30' to 40'.		
		For Work >40' Above Floor, Add	*0.36*	
		Note: Applied only to work area above 40'.		
		For Up To 100, Add	*0.74*	
		For >100 To 250, Add	*0.39*	
		For >250 To 500, Add	*0.18*	
		For >2,500 To 5,000, Deduct	*-0.11*	
		For >5,000 To 10,000, Deduct	*-0.23*	
		For >10,000 To 20,000, Deduct	*-0.34*	
		For >20,000, Deduct	*-0.46*	

09 96 56 Epoxy Coatings *(09 96)*

09 96 56 00-0001 High Build Epoxy *(09 96 56)*

09 96 56 00-0002	SF	50 Mil, High Build Epoxy	3.42	

09 96 56 00-0003 Laminated Epoxy With Fiberglass *(09 96 56)*

09 96 56 00-0004	SF	Laminated Epoxy With Fiberglass	6.72	

09 96 66 Aggregate Wall Coatings *(09 96)*

09 96 66 00-0001 Troweled On *(09 96 66)*

09 96 66 00-0002	SF	Exposed Aggregate - 1/16" To 1/4" - Troweled On	4.90	
09 96 66 00-0003	SF	Exposed Aggregate - 1/2" To 5/8" Troweled On	8.77	
09 96 66 00-0004	SF	Exposed Aggregate - 1" Troweled On	13.12	

09 96 66 00-0005 Sprayed On *(09 96 66)*

09 96 66 00-0006	SF	Exposed Aggregate - 1/8" - Sprayed On	4.00	

09 97 Special Coatings *(09 90)*

09 97 13 Steel Coatings *(09 97)*

09 97 13 23 Exterior Steel Coatings *(09 97 13)*

Note: Steel Structure Painting Council, SSPC; Surface Preparation, SP.

09 97 13 23-0001 Surface Preparation For Structural Steel *(09 97 13 23)*

Note: Type 1 structural steel - up to 2 SF per LF, Type 2 structural steel - over 2 SF to 5 SF per LF, Type 3 structural steel - over 5 SF per LF, and piping - under 14" diameter.

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

09 97 13 23-0002 SSPC SP7 Brush Off Blast Cleaning Surface Preparation For Structural Steel *(09 97 13 23-0001)*

Note: A Brush-Off Blast Cleaned surface, when viewed without magnification, shall be free of all visible oil, grease, dirt, dust, loose mill scale, loose rust and loose paint. Tightly adherent mill scale, rust and paint may remain on the surface. Mill scale, rust and coating are considered adherent if they cannot be removed by lifting with a dull putty knife after abrasive blast cleaning has been performed. Before blast cleaning, visible deposits of oil or grease shall be removed by any of the methods specified in SSPC-SP1 or other agreed upon methods. For complete instructions, refer to Joint Surface Preparation Standard SSPC-SP11

09 97 13 23-0003	SF	Type 1 Structural Steel SP7 Brush Off Blast Cleaning Surface Preparation	1.16	
		For Up To 100, Add	*0.82*	
		For >100 To 250, Add	*0.38*	
		For >250 To 500, Add	*0.17*	
09 97 13 23-0004	SF	Type 2 Structural Steel SP7 Brush Off Blast Cleaning Surface Preparation	1.03	
		For Up To 100, Add	*0.72*	
		For >100 To 250, Add	*0.34*	
		For >250 To 500, Add	*0.15*	
09 97 13 23-0005	SF	Type 3 Structural Steel SP7 Brush Off Blast Cleaning Surface Preparation	1.02	
		For Up To 100, Add	*0.72*	
		For >100 To 250, Add	*0.34*	
		For >250 To 500, Add	*0.15*	
09 97 13 23-0006	SF	Up To 14" Diameter Pipe SP7 Brush Off Blast Cleaning Surface Preparation	1.45	
		For Up To 100, Add	*1.03*	
		For >100 To 250, Add	*0.48*	
		For >250 To 500, Add	*0.21*	

09 97 13 23-0007 SSPC SP6 Commercial Blast Cleaning Surface Preparation For Structural Steel *(09 97 13 23-0001)*

Note: A Commercial Blast Cleaned surface, when viewed without magnification, shall be free of all visible oil, grease, dirt, dust, mill scale, rust, paint, oxides, corrosion products and other foreign matter, except for staining. Staining shall be limited to no more than 33% of each square inch of surface area and may consist of light shadows, slight streaks or minor discoloration caused by stains of rust, stains of mill scale or stains of previously applied paint. Before blast cleaning, visible deposits of oil or grease shall be removed by any of the methods specified in SSPC-SP1 or other agreed upon methods. For complete instructions, refer to Joint Surface Preparation Standard SSPC-SP6/NACE 3 or ISO 8501-1 Sa 2.

09 97 13 23-0008	SF	Type 1 Structural Steel SP6 Commercial Blast Cleaning Surface Preparation	2.99	
		For Up To 100, Add	*2.14*	
		For >100 To 250, Add	*1.00*	
		For >250 To 500, Add	*0.43*	
09 97 13 23-0009	SF	Type 2 Structural Steel SP6 Commercial Blast Cleaning Surface Preparation	2.60	
		For Up To 100, Add	*1.85*	
		For >100 To 250, Add	*0.87*	
		For >250 To 500, Add	*0.37*	
09 97 13 23-0010	SF	Type 3 Structural Steel SP6 Commercial Blast Cleaning Surface Preparation	2.41	
		For Up To 100, Add	*1.71*	
		For >100 To 250, Add	*0.80*	
		For >250 To 500, Add	*0.35*	
09 97 13 23-0011	SF	Up To 14" Diameter Pipe SP6 Commercial Blast Cleaning Surface Preparation	3.75	
		For Up To 100, Add	*2.71*	
		For >100 To 250, Add	*1.27*	
		For >250 To 500, Add	*0.55*	

09 97 13 23-0012 SSPC SP5 White Metal Blast Cleaning Surface Preparation For Structural Steel *(09 97 13 23-0001)*

Note: A White Metal Blast Cleaned surface, when viewed without magnification, shall be free of all visible oil, grease, dirt, dust, mill scale, rust, paint, oxides, corrosion products and other foreign matter. Before blast cleaning, visible deposits of oil or grease shall be removed by any of the methods specified in SSPC-SP1 or other agreed upon methods. For complete Instructions, refer to Joint Surface Preparation Standard SSPC-SP5/NACE 1 or ISO 8501-1 Sa 3.

09 97 13 23-0013	SF	Type 1 Structural Steel SP5 White Metal Blast Cleaning Surface Preparation	5.83	
		For Up To 100, Add	*4.19*	
		For >100 To 250, Add	*1.97*	
		For >250 To 500, Add	*0.84*	
09 97 13 23-0014	SF	Type 2 Structural Steel SP5 White Metal Blast Cleaning Surface Preparation	4.99	
		For Up To 100, Add	*3.57*	
		For >100 To 250, Add	*1.68*	
		For >250 To 500, Add	*0.72*	
09 97 13 23-0015	SF	Type 3 Structural Steel SP5 White Metal Blast Cleaning Surface Preparation	4.58	
		For Up To 100, Add	*3.27*	
		For >100 To 250, Add	*1.53*	
		For >250 To 500, Add	*0.66*	
09 97 13 23-0016	SF	Up To 14" Diameter Pipe SP5 White Metal Blast Cleaning Surface Preparation	7.05	
		For Up To 100, Add	*5.11*	
		For >100 To 250, Add	*2.40*	
		For >250 To 500, Add	*1.03*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 97 13 23-0017		SSPC SP10 Near White Metal Blast Cleaning Surface Preparation For Structural Steel *(09 97 13 23-0001)*		
		Note: A Near-White Blast Cleaned surface, when viewed without magnification, shall be free of all visible oil, grease, dirt, dust, mill scale, rust, paint, oxides, corrosion products and other foreign matter, except for staining. Staining shall be limited to no more than 5 percent of each square inch of surface area and may consist of light shadows, slight streaks or minor discoloration caused by stains of rust, stains of mill scale or stains of previously applied paint. Before blast cleaning, visible deposits of oil or grease shall be removed by any of the methods specified in SSPC-SP1 or other agreed upon methods. For complete instructions, refer to Joint Surface Preparation Standard SSPC-SP10/NACE 2 or ISO 8501-1 Sa 2.5.		
09 97 13 23-0018	SF	Type 1 Structural Steel SP10 Near White Metal Blast Cleaning Surface Preparation	4.34	
		For Up To 100, Add	*3.11*	
		For >100 To 250, Add	*1.46*	
		For >250 To 500, Add	*0.63*	
09 97 13 23-0019	SF	Type 2 Structural Steel SP10 Near White Metal Blast Cleaning Surface Preparation	3.69	
		For Up To 100, Add	*2.64*	
		For >100 To 250, Add	*1.24*	
		For >250 To 500, Add	*0.53*	
09 97 13 23-0020	SF	Type 3 Structural Steel SP10 Near White Metal Blast Cleaning Surface Preparation	3.49	
		For Up To 100, Add	*2.49*	
		For >100 To 250, Add	*1.17*	
		For >250 To 500, Add	*0.50*	
09 97 13 23-0021	SF	Up To 14" Diameter Pipe SP10 Near White Metal Blast Cleaning Surface Preparation	5.13	
		For Up To 100, Add	*3.72*	
		For >100 To 250, Add	*1.74*	
		For >250 To 500, Add	*0.75*	
09 97 13 23-0022		Protective Coatings For Tanks And Structural Steel *(09 97 13 23)*		
		Note: Type 1 structural steel - up to 2 SF per LF, Type 2 structural steel - over 2 SF to 5 SF per LF, Type 3 structural steel - over 5 SF per LF, and piping - under 14" diameter.		
09 97 13 23-0023		1.5 Mil Prime Coat For Structural Steel *(09 97 13 23-0022)*		
09 97 13 23-0024	SF	Spray Type 1 Structural Steel 1.5 Mil Prime Coat	1.28	
		For Up To 100, Add	*0.83*	
		For >100 To 250, Add	*0.40*	
		For >250 To 500, Add	*0.17*	
09 97 13 23-0025	SF	Spray Type 2 Structural Steel 1.5 Mil Prime Coat	0.95	
		For Up To 100, Add	*0.60*	
		For >100 To 250, Add	*0.29*	
		For >250 To 500, Add	*0.12*	
09 97 13 23-0026	SF	Spray Type 3 Structural Steel 1.5 Mil Prime Coat	0.86	
		For Up To 100, Add	*0.54*	
		For >100 To 250, Add	*0.26*	
		For >250 To 500, Add	*0.11*	
09 97 13 23-0027	SF	Spray Up To 14" Diameter Pipe 1.5 Mil Prime Coat	1.52	
		For Up To 100, Add	*1.02*	
		For >100 To 250, Add	*0.48*	
		For >250 To 500, Add	*0.21*	
09 97 13 23-0028	SF	Brush Type 1 Structural Steel 1.5 Mil Prime Coat	1.66	
		For Up To 100, Add	*1.12*	
		For >100 To 250, Add	*0.53*	
		For >250 To 500, Add	*0.23*	
09 97 13 23-0029	SF	Brush Type 2 Structural Steel 1.5 Mil Prime Coat	1.24	
		For Up To 100, Add	*0.82*	
		For >100 To 250, Add	*0.39*	
		For >250 To 500, Add	*0.17*	
09 97 13 23-0030	SF	Brush Type 3 Structural Steel 1.5 Mil Prime Coat	1.11	
		For Up To 100, Add	*0.72*	
		For >100 To 250, Add	*0.34*	
		For >250 To 500, Add	*0.15*	
09 97 13 23-0031	SF	Brush Up To 14" Diameter Pipe 1.5 Mil Prime Coat	1.99	
		For Up To 100, Add	*1.37*	
		For >100 To 250, Add	*0.65*	
		For >250 To 500, Add	*0.28*	
09 97 13 23-0032		1.5 Mil Prime And Two 1.5 Mil Alkyd Finish Coats For Structural Steel *(09 97 13 23-0022)*		
09 97 13 23-0033	SF	Spray Type 1 Structural Steel 1.5 Mil Prime And Two 1.5 Mil Alkyd Finish Coats	3.76	
		For Up To 100, Add	*2.43*	
		For >100 To 250, Add	*1.15*	
		For >250 To 500, Add	*0.50*	
09 97 13 23-0034	SF	Spray Type 2 Structural Steel 1.5 Mil Prime And Two 1.5 Mil Alkyd Finish Coats	2.72	
		For Up To 100, Add	*1.69*	
		For >100 To 250, Add	*0.80*	
		For >250 To 500, Add	*0.35*	
09 97 13 23-0035	SF	Spray Type 3 Structural Steel 1.5 Mil Prime And Two 1.5 Mil Alkyd Finish Coats	2.54	
		For Up To 100, Add	*1.55*	
		For >100 To 250, Add	*0.74*	
		For >250 To 500, Add	*0.32*	
09 97 13 23-0036	SF	Spray Up To 14" Diameter Pipe 1.5 Mil Prime And Two 1.5 Mil Alkyd Finish Coats	4.57	
		For Up To 100, Add	*3.02*	
		For >100 To 250, Add	*1.43*	
		For >250 To 500, Add	*0.62*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 97 13 23-0037	SF	Spray Type 1 Structural Steel 1.5 Mil Prime And One 1.5 Mil Alkyd Finish Coats	2.82	
		For Up To 100, Add	*1.82*	
		For >100 To 250, Add	*0.86*	
		For >250 To 500, Add	*0.37*	
09 97 13 23-0038	SF	Spray Type 2 Structural Steel 1.5 Mil Prime And One 1.5 Mil Alkyd Finish Coats	2.05	
		For Up To 100, Add	*1.27*	
		For >100 To 250, Add	*0.61*	
		For >250 To 500, Add	*0.26*	
09 97 13 23-0039	SF	Spray Type 3 Structural Steel 1.5 Mil Prime And One 1.5 Mil Alkyd Finish Coats	1.89	
		For Up To 100, Add	*1.15*	
		For >100 To 250, Add	*0.55*	
		For >250 To 500, Add	*0.24*	
09 97 13 23-0040	SF	Spray Up To 14" Diameter Pipe 1.5 Mil Prime And One 1.5 Mil Alkyd Finish Coats	3.43	
		For Up To 100, Add	*2.27*	
		For >100 To 250, Add	*1.07*	
		For >250 To 500, Add	*0.46*	
09 97 13 23-0041	SF	Brush Type 1 Structural Steel 1.5 Mil Prime And Two 1.5 Mil Alkyd Finish Coats	5.27	
		For Up To 100, Add	*3.56*	
		For >100 To 250, Add	*1.68*	
		For >250 To 500, Add	*0.73*	
09 97 13 23-0042	SF	Brush Type 2 Structural Steel 1.5 Mil Prime And Two 1.5 Mil Alkyd Finish Coats	3.77	
		For Up To 100, Add	*2.47*	
		For >100 To 250, Add	*1.17*	
		For >250 To 500, Add	*0.51*	
09 97 13 23-0043	SF	Brush Type 3 Structural Steel 1.5 Mil Prime And Two 1.5 Mil Alkyd Finish Coats	3.48	
		For Up To 100, Add	*2.26*	
		For >100 To 250, Add	*1.07*	
		For >250 To 500, Add	*0.46*	
09 97 13 23-0044	SF	Brush Up To 14" Diameter Pipe 1.5 Mil Prime And Two 1.5 Mil Alkyd Finish Coats	6.45	
		For Up To 100, Add	*4.43*	
		For >100 To 250, Add	*2.09*	
		For >250 To 500, Add	*0.90*	
09 97 13 23-0045	SF	Brush Type 1 Structural Steel 1.5 Mil Prime And One 1.5 Mil Alkyd Finish Coats	3.95	
		For Up To 100, Add	*2.67*	
		For >100 To 250, Add	*1.26*	
		For >250 To 500, Add	*0.54*	
09 97 13 23-0046	SF	Brush Type 2 Structural Steel 1.5 Mil Prime And One 1.5 Mil Alkyd Finish Coats	2.82	
		For Up To 100, Add	*1.85*	
		For >100 To 250, Add	*0.88*	
		For >250 To 500, Add	*0.38*	
09 97 13 23-0047	SF	Brush Type 3 Structural Steel 1.5 Mil Prime And One 1.5 Mil Alkyd Finish Coats	2.60	
		For Up To 100, Add	*1.69*	
		For >100 To 250, Add	*0.80*	
		For >250 To 500, Add	*0.35*	
09 97 13 23-0048	SF	Brush Up To 14" Diameter Pipe 1.5 Mil Prime And One 1.5 Mil Alkyd Finish Coats	4.83	
		For Up To 100, Add	*3.32*	
		For >100 To 250, Add	*1.56*	
		For >250 To 500, Add	*0.67*	
09 97 13 23-0049		**Touch-Up And Two 1.5 Mil Alkyd Finish Coats For Structural Steel** *(09 97 13 23-0022)*		
09 97 13 23-0050	SF	Spray Type 1 Structural Steel Touch-Up And Two 1.5 Mil Alkyd Finish Coats	2.90	
		For Up To 100, Add	*1.89*	
		For >100 To 250, Add	*0.90*	
		For >250 To 500, Add	*0.39*	
09 97 13 23-0051	SF	Spray Type 2 Structural Steel Touch-Up And Two 1.5 Mil Alkyd Finish Coats	2.38	
		For Up To 100, Add	*1.53*	
		For >100 To 250, Add	*0.73*	
		For >250 To 500, Add	*0.31*	
09 97 13 23-0052	SF	Spray Type 3 Structural Steel Touch-Up And Two 1.5 Mil Alkyd Finish Coats	2.18	
		For Up To 100, Add	*1.38*	
		For >100 To 250, Add	*0.66*	
		For >250 To 500, Add	*0.28*	
09 97 13 23-0053	SF	Spray Up To 14" Diameter Pipe Touch-Up And Two 1.5 Mil Alkyd Finish Coats	3.60	
		For Up To 100, Add	*2.41*	
		For >100 To 250, Add	*1.14*	
		For >250 To 500, Add	*0.49*	
09 97 13 23-0054	SF	Spray Type 1 Structural Steel Touch-Up And One 1.5 Mil Alkyd Finish Coat	1.86	
		For Up To 100, Add	*1.22*	
		For >100 To 250, Add	*0.58*	
		For >250 To 500, Add	*0.25*	
09 97 13 23-0055	SF	Spray Type 2 Structural Steel Touch-Up And One 1.5 Mil Alkyd Finish Coat	1.53	
		For Up To 100, Add	*0.98*	
		For >100 To 250, Add	*0.47*	
		For >250 To 500, Add	*0.20*	
09 97 13 23-0056	SF	Spray Type 3 Structural Steel Touch-Up And One 1.5 Mil Alkyd Finish Coat	1.40	
		For Up To 100, Add	*0.88*	
		For >100 To 250, Add	*0.42*	
		For >250 To 500, Add	*0.18*	
09 97 13 23-0057	SF	Spray Up To 14" Diameter Pipe Touch-Up And One 1.5 Mil Alkyd Finish Coat	2.30	
		For Up To 100, Add	*1.54*	
		For >100 To 250, Add	*0.73*	
		For >250 To 500, Add	*0.31*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 97 13 23-0058	SF	Brush Type 1 Structural Steel Touch-Up And Two 1.5 Mil Alkyd Finish Coats	3.76	
		For Up To 100, Add	*2.54*	
		For >100 To 250, Add	*1.20*	
		For >250 To 500, Add	*0.52*	
09 97 13 23-0059	SF	Brush Type 2 Structural Steel Touch-Up And Two 1.5 Mil Alkyd Finish Coats	3.06	
		For Up To 100, Add	*2.04*	
		For >100 To 250, Add	*0.96*	
		For >250 To 500, Add	*0.42*	
09 97 13 23-0060	SF	Brush Type 3 Structural Steel Touch-Up And Two 1.5 Mil Alkyd Finish Coats	2.80	
		For Up To 100, Add	*1.84*	
		For >100 To 250, Add	*0.87*	
		For >250 To 500, Add	*0.38*	
09 97 13 23-0061	SF	Brush Up To 14" Diameter Pipe Touch-Up And Two 1.5 Mil Alkyd Finish Coats	4.70	
		For Up To 100, Add	*3.23*	
		For >100 To 250, Add	*1.52*	
		For >250 To 500, Add	*0.66*	
09 97 13 23-0062	SF	Brush Type 1 Structural Steel Touch-Up And One 1.5 Mil Alkyd Finish Coat	2.40	
		For Up To 100, Add	*1.62*	
		For >100 To 250, Add	*0.77*	
		For >250 To 500, Add	*0.33*	
09 97 13 23-0063	SF	Brush Type 2 Structural Steel Touch-Up And One 1.5 Mil Alkyd Finish Coat	1.97	
		For Up To 100, Add	*1.31*	
		For >100 To 250, Add	*0.62*	
		For >250 To 500, Add	*0.27*	
09 97 13 23-0064	SF	Brush Type 3 Structural Steel Touch-Up And One 1.5 Mil Alkyd Finish Coat	1.80	
		For Up To 100, Add	*1.18*	
		For >100 To 250, Add	*0.56*	
		For >250 To 500, Add	*0.24*	
09 97 13 23-0065	SF	Brush Up To 14" Diameter Pipe Touch-Up And One 1.5 Mil Alkyd Finish Coat	3.01	
		For Up To 100, Add	*2.07*	
		For >100 To 250, Add	*0.98*	
		For >250 To 500, Add	*0.42*	

09 97 13 23-0066 2 Mil Prime And Two 2 Mil Epoxy Polyamide Cured Resin Finish Coats For Structural Steel *(09 97 13 23-0022)*

09 97 13 23-0067	SF	Spray Type 1 Structural Steel 2 Mil Prime And Two 2 Mil Epoxy Polyamide Cured Resin Finish Coats	4.82	
		For Up To 100, Add	*2.82*	
		For >100 To 250, Add	*1.36*	
		For >250 To 500, Add	*0.59*	
09 97 13 23-0068	SF	Spray Type 2 Structural Steel 2 Mil Prime And Two 2 Mil Epoxy Polyamide Cured Resin Finish Coats	3.53	
		For Up To 100, Add	*1.93*	
		For >100 To 250, Add	*0.94*	
		For >250 To 500, Add	*0.41*	
09 97 13 23-0069	SF	Spray Type 3 Structural Steel 2 Mil Prime And Two 2 Mil Epoxy Polyamide Cured Resin Finish Coats	3.15	
		For Up To 100, Add	*1.64*	
		For >100 To 250, Add	*0.80*	
		For >250 To 500, Add	*0.35*	
09 97 13 23-0070	SF	Spray Up To 14" Diameter Pipe 2 Mil Prime And Two 2 Mil Epoxy Polyamide Cured Resin Finish Coats	5.44	
		For Up To 100, Add	*3.26*	
		For >100 To 250, Add	*1.56*	
		For >250 To 500, Add	*0.68*	
09 97 13 23-0071	SF	Spray Type 1 Structural Steel Two 2 Mil Epoxy Polyamide Cured Resin Finish Coats	3.37	
		For Up To 100, Add	*1.98*	
		For >100 To 250, Add	*0.95*	
		For >250 To 500, Add	*0.41*	
09 97 13 23-0072	SF	Spray Type 2 Structural Steel Two 2 Mil Epoxy Polyamide Cured Resin Finish Coats	2.47	
		For Up To 100, Add	*1.35*	
		For >100 To 250, Add	*0.65*	
		For >250 To 500, Add	*0.29*	
09 97 13 23-0073	SF	Spray Type 3 Structural Steel Two 2 Mil Epoxy Polyamide Cured Resin Finish Coats	2.20	
		For Up To 100, Add	*1.15*	
		For >100 To 250, Add	*0.56*	
		For >250 To 500, Add	*0.25*	
09 97 13 23-0074	SF	Spray Up To 14" Diameter Pipe Two 2 Mil Epoxy Polyamide Cured Resin Finish Coats	3.81	
		For Up To 100, Add	*2.29*	
		For >100 To 250, Add	*1.10*	
		For >250 To 500, Add	*0.48*	

09 97 13 23-0075 2 Mil Prime And Two 6 Mil High Build Epoxy Finish Coats For Structural Steel *(09 97 13 23-0022)*

09 97 13 23-0076	SF	Spray Type 1 Structural Steel 2 Mil Prime And Two 6 Mil High Build Epoxy Finish Coats	5.19	
		For Up To 100, Add	*2.88*	
		For >100 To 250, Add	*1.39*	
		For >250 To 500, Add	*0.61*	
09 97 13 23-0077	SF	Spray Type 2 Structural Steel 2 Mil Prime And Two 6 Mil High Build Epoxy Finish Coats	3.87	
		For Up To 100, Add	*1.98*	
		For >100 To 250, Add	*0.97*	
		For >250 To 500, Add	*0.43*	
09 97 13 23-0078	SF	Spray Type 3 Structural Steel 2 Mil Prime And Two 6 Mil High Build Epoxy Finish Coats	3.49	
		For Up To 100, Add	*1.69*	
		For >100 To 250, Add	*0.84*	
		For >250 To 500, Add	*0.37*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 97 13 23-0079	SF	Spray Up To 14" Diameter Pipe 2 Mil Prime And Two 6 Mil High Build Epoxy Finish Coats	5.83	
		For Up To 100, Add	*3.32*	
		For >100 To 250, Add	*1.60*	
		For >250 To 500, Add	*0.70*	
09 97 13 23-0080	SF	Spray Type 1 Structural Steel Two 6 Mil High Build Epoxy Finish Coats	4.26	
		For Up To 100, Add	*2.36*	
		For >100 To 250, Add	*1.14*	
		For >250 To 500, Add	*0.50*	
09 97 13 23-0081	SF	Spray Type 2 Structural Steel Two 6 Mil High Build Epoxy Finish Coats	3.18	
		For Up To 100, Add	*1.63*	
		For >100 To 250, Add	*0.80*	
		For >250 To 500, Add	*0.35*	
09 97 13 23-0082	SF	Spray Type 3 Structural Steel Two 6 Mil High Build Epoxy Finish Coats	2.86	
		For Up To 100, Add	*1.39*	
		For >100 To 250, Add	*0.69*	
		For >250 To 500, Add	*0.30*	
09 97 13 23-0083	SF	Spray Up To 14" Diameter Pipe Two 6 Mil High Build Epoxy Finish Coats	4.78	
		For Up To 100, Add	*2.73*	
		For >100 To 250, Add	*1.32*	
		For >250 To 500, Add	*0.57*	
09 97 13 23-0084		**1 Mil Prime, Three 2.33 Mil Body Coats And Two 1 Mil Vinyl Finish Coats For Structural Steel** *(09 97 13 23-0022)*		
09 97 13 23-0085	SF	Spray Type 1 Structural Steel 1 Mil Prime, Three 2.33 Mil Body Coats And Two 1 Mil Vinyl Finish Coats	10.83	
		For Up To 100, Add	*6.17*	
		For >100 To 250, Add	*2.98*	
		For >250 To 500, Add	*1.30*	
09 97 13 23-0086	SF	Spray Type 2 Structural Steel 1 Mil Prime, Three 2.33 Mil Body Coats And Two 1 Mil Vinyl Finish Coats	8.26	
		For Up To 100, Add	*4.45*	
		For >100 To 250, Add	*2.16*	
		For >250 To 500, Add	*0.95*	
09 97 13 23-0087	SF	Spray Type 3 Structural Steel 1 Mil Prime, Three 2.33 Mil Body Coats And Two 1 Mil Vinyl Finish Coats	7.96	
		For Up To 100, Add	*4.22*	
		For >100 To 250, Add	*2.06*	
		For >250 To 500, Add	*0.90*	
09 97 13 23-0088	SF	Spray Up To 14" Diameter Pipe 1 Mil Prime, Three 2.33 Mil Body Coats And Two 1 Mil Vinyl Finish Coats	12.55	
		For Up To 100, Add	*7.43*	
		For >100 To 250, Add	*3.57*	
		For >250 To 500, Add	*1.55*	
09 97 13 23-0089		**1.5 Mil Prime And Two 4 Mil High Build Vinyl Finish Coats For Structural Steel** *(09 97 13 23-0022)*		
09 97 13 23-0090	SF	Spray Type 1 Structural Steel 1.5 Mil Prime And Two 4 Mil High Build Vinyl Finish Coats	5.75	
		For Up To 100, Add	*3.02*	
		For >100 To 250, Add	*1.48*	
		For >250 To 500, Add	*0.65*	
09 97 13 23-0091	SF	Spray Type 2 Structural Steel 1.5 Mil Prime And Two 4 Mil High Build Vinyl Finish Coats	4.56	
		For Up To 100, Add	*2.14*	
		For >100 To 250, Add	*1.06*	
		For >250 To 500, Add	*0.47*	
09 97 13 23-0092	SF	Spray Type 3 Structural Steel 1.5 Mil Prime And Two 4 Mil High Build Vinyl Finish Coats	4.37	
		For Up To 100, Add	*2.00*	
		For >100 To 250, Add	*1.00*	
		For >250 To 500, Add	*0.44*	
09 97 13 23-0093	SF	Spray Up To 14" Diameter Pipe 1.5 Mil Prime And Two 4 Mil High Build Vinyl Finish Coats	6.50	
		For Up To 100, Add	*3.54*	
		For >100 To 250, Add	*1.72*	
		For >250 To 500, Add	*0.75*	
09 97 13 23-0094	SF	Spray Type 1 Structural Steel Two 4 Mil High Build Vinyl Finish Coats	4.55	
		For Up To 100, Add	*2.39*	
		For >100 To 250, Add	*1.17*	
		For >250 To 500, Add	*0.51*	
09 97 13 23-0095	SF	Spray Type 2 Structural Steel Two 4 Mil High Build Vinyl Finish Coats	3.60	
		For Up To 100, Add	*1.69*	
		For >100 To 250, Add	*0.84*	
		For >250 To 500, Add	*0.37*	
09 97 13 23-0096	SF	Spray Type 3 Structural Steel Two 4 Mil High Build Vinyl Finish Coats	3.44	
		For Up To 100, Add	*1.57*	
		For >100 To 250, Add	*0.78*	
		For >250 To 500, Add	*0.35*	
09 97 13 23-0097	SF	Spray Up To 14" Diameter Pipe Two 4 Mil High Build Vinyl Finish Coats	5.13	
		For Up To 100, Add	*2.80*	
		For >100 To 250, Add	*1.36*	
		For >250 To 500, Add	*0.59*	
09 97 13 23-0098		**Two 8 Mil Coal Tar Epoxy Coats For Structural Steel** *(09 97 13 23-0022)*		
09 97 13 23-0099	SF	Spray Type 1 Structural Steel Two 8 Mil Coal Tar Epoxy Coats	4.82	
		For Up To 100, Add	*2.88*	
		For >100 To 250, Add	*1.38*	
		For >250 To 500, Add	*0.60*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 97 13 23-0100	SF	Spray Type 2 Structural Steel Two 8 Mil Coal Tar Epoxy Coats	3.93	
		For Up To 100, Add	*2.28*	
		For >100 To 250, Add	*1.10*	
		For >250 To 500, Add	*0.48*	
09 97 13 23-0101	SF	Spray Type 3 Structural Steel Two 8 Mil Coal Tar Epoxy Coats	3.64	
		For Up To 100, Add	*2.06*	
		For >100 To 250, Add	*1.00*	
		For >250 To 500, Add	*0.44*	
09 97 13 23-0102	SF	Spray Up To 14" Diameter Pipe Two 8 Mil Coal Tar Epoxy Coats	5.93	
		For Up To 100, Add	*3.69*	
		For >100 To 250, Add	*1.76*	
		For >250 To 500, Add	*0.76*	

09 97 13 23-0103 One 1 Mil Primer, One 3 Mil Intermediate And One 1 Mil Chlorinated Rubber Finish Coat For Structural Steel *(09 97 13 23-0022)*

09 97 13 23-0104	SF	Spray Type 1 Structural Steel One 1 Mil Primer, One 3 Mil Intermediate And One 1 Mil Chlorinated Rubber Finish Coat	4.61	
		For Up To 100, Add	*2.91*	
		For >100 To 250, Add	*1.38*	
		For >250 To 500, Add	*0.60*	
09 97 13 23-0105	SF	Spray Type 2 Structural Steel One 1 Mil Primer, One 3 Mil Intermediate And One 1 Mil Chlorinated Rubber Finish Coat	3.30	
		For Up To 100, Add	*1.95*	
		For >100 To 250, Add	*0.94*	
		For >250 To 500, Add	*0.41*	
09 97 13 23-0106	SF	Spray Type 3 Structural Steel One 1 Mil Primer, One 3 Mil Intermediate And One 1 Mil Chlorinated Rubber Finish Coat	2.82	
		For Up To 100, Add	*1.59*	
		For >100 To 250, Add	*0.77*	
		For >250 To 500, Add	*0.34*	
09 97 13 23-0107	SF	Spray Up To 14" Diameter Pipe One 1 Mil Primer, One 3 Mil Intermediate And One 1 Mil Chlorinated Rubber Finish Coat	5.27	
		For Up To 100, Add	*3.36*	
		For >100 To 250, Add	*1.60*	
		For >250 To 500, Add	*0.69*	

09 97 13 23-0108 One 3 Mil High Zinc Silicate Coat For Structural Steel *(09 97 13 23-0022)*

09 97 13 23-0109	SF	Spray Type 1 Structural Steel One 3 Mil High Zinc Silicate Coat	2.52	
		For Up To 100, Add	*1.31*	
		For >100 To 250, Add	*0.64*	
		For >250 To 500, Add	*0.28*	
09 97 13 23-0110	SF	Spray Type 2 Structural Steel One 3 Mil High Zinc Silicate Coat	1.85	
		For Up To 100, Add	*0.86*	
		For >100 To 250, Add	*0.43*	
		For >250 To 500, Add	*0.19*	
09 97 13 23-0111	SF	Spray Type 3 Structural Steel One 3 Mil High Zinc Silicate Coat	1.76	
		For Up To 100, Add	*0.79*	
		For >100 To 250, Add	*0.40*	
		For >250 To 500, Add	*0.18*	
09 97 13 23-0112	SF	Spray Up To 14" Diameter Pipe One 3 Mil High Zinc Silicate Coat	2.65	
		For Up To 100, Add	*1.39*	
		For >100 To 250, Add	*0.68*	
		For >250 To 500, Add	*0.30*	

09 97 13 23-0113 Two 1.5 Mil Vinyl Enamel Finish Coats For Structural Steel *(09 97 13 23-0022)*

Note: Installed over existing primer.

09 97 13 23-0114	SF	Spray Type 1 Structural Steel Two 1.5 Mil Vinyl Enamel Finish Coats	3.84	
		For Up To 100, Add	*2.21*	
		For >100 To 250, Add	*1.06*	
		For >250 To 500, Add	*0.46*	
09 97 13 23-0115	SF	Spray Type 2 Structural Steel Two 1.5 Mil Vinyl Enamel Finish Coats	3.15	
		For Up To 100, Add	*1.75*	
		For >100 To 250, Add	*0.85*	
		For >250 To 500, Add	*0.37*	
09 97 13 23-0116	SF	Spray Type 3 Structural Steel Two 1.5 Mil Vinyl Enamel Finish Coats	2.77	
		For Up To 100, Add	*1.47*	
		For >100 To 250, Add	*0.71*	
		For >250 To 500, Add	*0.31*	
09 97 13 23-0117	SF	Spray Up To 14" Diameter Pipe Two 1.5 Mil Vinyl Enamel Finish Coats	4.47	
		For Up To 100, Add	*2.66*	
		For >100 To 250, Add	*1.27*	
		For >250 To 500, Add	*0.55*	

09 97 13 24 Steel Water Storage Tank Painting *(09 97 13)*

09 97 13 24-0001 Surface Preparation For Tanks *(09 97 13 24)*

Note: Small pressure vessels and tanks - up to 12' diameter, large pressure vessels and tanks - over 12' diameter, tank interiors - over 6' diameter.

09 97 13 24-0002 SSPC SP2 Or 3 Hand Or Power Tool Cleaning Surface Preparation For Tanks *(09 97 13 24-0001)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 97 13 24-0003	SF	Small Vessel/Tank SP2/3 Hand Or Power Tool Cleaning Surface Preparation	1.61	
		For Up To 100, Add	*1.21*	
		For >100 To 250, Add	*0.56*	
		For >250 To 500, Add	*0.24*	
09 97 13 24-0004	SF	Large Vessel/Tank SP2/3 Hand Or Power Tool Cleaning Surface Preparation	1.43	
		For Up To 100, Add	*1.07*	
		For >100 To 250, Add	*0.50*	
		For >250 To 500, Add	*0.21*	
09 97 13 24-0005	SF	Vessel/Tank Interior SP2/3 Hand Or Power Tool Cleaning Surface Preparation	2.02	
		For Up To 100, Add	*1.52*	
		For >100 To 250, Add	*0.71*	
		For >250 To 500, Add	*0.30*	

09 97 13 24-0006 SSPC SP7 Brush Off Blast Cleaning Surface Preparation For Tanks *(09 97 13 24-0001)*

09 97 13 24-0007	SF	Small Vessel/Tank SP7 Brush Off Blast Cleaning Surface Preparation	0.98	
		For Up To 100, Add	*0.69*	
		For >100 To 250, Add	*0.32*	
		For >250 To 500, Add	*0.14*	
09 97 13 24-0008	SF	Large Vessel/Tank SP7 Brush Off Blast Cleaning Surface Preparation	0.80	
		For Up To 100, Add	*0.56*	
		For >100 To 250, Add	*0.27*	
		For >250 To 500, Add	*0.11*	
09 97 13 24-0009	SF	Vessel/Tank Interior SP7 Brush Off Blast Cleaning Surface Preparation	1.39	
		For Up To 100, Add	*1.01*	
		For >100 To 250, Add	*0.47*	
		For >250 To 500, Add	*0.20*	

09 97 13 24-0010 SSPC SP6 Commercial Blast Cleaning Surface Preparation For Tanks *(09 97 13 24-0001)*

09 97 13 24-0011	SF	Small Vessel/Tank SP6 Commercial Blast Cleaning Surface Preparation	2.41	
		For Up To 100, Add	*1.71*	
		For >100 To 250, Add	*0.80*	
		For >250 To 500, Add	*0.35*	
09 97 13 24-0012	SF	Large Vessel/Tank SP6 Commercial Blast Cleaning Surface Preparation	2.21	
		For Up To 100, Add	*1.56*	
		For >100 To 250, Add	*0.73*	
		For >250 To 500, Add	*0.32*	
09 97 13 24-0013	SF	Vessel/Tank Interior SP6 Commercial Blast Cleaning Surface Preparation	3.23	
		For Up To 100, Add	*2.33*	
		For >100 To 250, Add	*1.09*	
		For >250 To 500, Add	*0.47*	

09 97 13 24-0014 SSPC SP5 White Metal Blast Cleaning Surface Preparation For Tanks *(09 97 13 24-0001)*

09 97 13 24-0015	SF	Small Vessel/Tank SP5 White Metal Blast Cleaning Surface Preparation	4.37	
		For Up To 100, Add	*3.12*	
		For >100 To 250, Add	*1.46*	
		For >250 To 500, Add	*0.63*	
09 97 13 24-0016	SF	Large Vessel/Tank SP5 White Metal Blast Cleaning Surface Preparation	4.16	
		For Up To 100, Add	*2.96*	
		For >100 To 250, Add	*1.39*	
		For >250 To 500, Add	*0.60*	
09 97 13 24-0017	SF	Vessel/Tank Interior SP5 White Metal Blast Cleaning Surface Preparation	6.10	
		For Up To 100, Add	*4.41*	
		For >100 To 250, Add	*2.07*	
		For >250 To 500, Add	*0.89*	

09 97 13 24-0018 SSPC SP10 Near White Metal Blast Cleaning Surface Preparation For Tanks *(09 97 13 24-0001)*

09 97 13 24-0019	SF	Small Vessel/Tank SP10 Near White Metal Blast Cleaning Surface Preparation	3.48	
		For Up To 100, Add	*2.49*	
		For >100 To 250, Add	*1.17*	
		For >250 To 500, Add	*0.50*	
09 97 13 24-0020	SF	Large Vessel/Tank SP10 Near White Metal Blast Cleaning Surface Preparation	3.48	
		For Up To 100, Add	*2.49*	
		For >100 To 250, Add	*1.17*	
		For >250 To 500, Add	*0.50*	
09 97 13 24-0021	SF	Vessel/Tank Interior SP10 Near White Metal Blast Cleaning Surface Preparation	5.12	
		For Up To 100, Add	*3.72*	
		For >100 To 250, Add	*1.74*	
		For >250 To 500, Add	*0.75*	

09 97 13 24-0022 Protective Coatings For Tanks *(09 97 13 24)*

Note: Small pressure vessels and tanks - up to 12' diameter, large pressure vessels and tanks - over 12' diameter, tank interiors - over 6' diameter.

09 97 13 24-0023 1.5 Mil Prime Coat For Tanks *(09 97 13 24-0022)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 97 13 24-0024	SF	Spray Small Vessel/Tank 1.5 Mil Prime Coat	0.76	
		For Up To 100, Add	*0.47*	
		For >100 To 250, Add	*0.22*	
		For >250 To 500, Add	*0.10*	
09 97 13 24-0025	SF	Spray Large Vessel/Tank 1.5 Mil Prime Coat	0.61	
		For Up To 100, Add	*0.36*	
		For >100 To 250, Add	*0.17*	
		For >250 To 500, Add	*0.07*	
09 97 13 24-0026	SF	Spray Tank Interior 1.5 Mil Prime Coat	1.44	
		For Up To 100, Add	*0.98*	
		For >100 To 250, Add	*0.46*	
		For >250 To 500, Add	*0.20*	
09 97 13 24-0027	SF	Brush Small Vessel/Tank 1.5 Mil Prime Coat	0.96	
		For Up To 100, Add	*0.62*	
		For >100 To 250, Add	*0.29*	
		For >250 To 500, Add	*0.13*	
09 97 13 24-0028	SF	Brush Large Vessel/Tank 1.5 Mil Prime Coat	0.77	
		For Up To 100, Add	*0.48*	
		For >100 To 250, Add	*0.23*	
		For >250 To 500, Add	*0.10*	
09 97 13 24-0029	SF	Brush Tank Interior 1.5 Mil Prime Coat	1.88	
		For Up To 100, Add	*1.31*	
		For >100 To 250, Add	*0.62*	
		For >250 To 500, Add	*0.27*	

09 97 13 24-0030 1.5 Mil Prime And Two 1.5 Mil Alkyd Finish Coats For Tanks *(09 97 13 24-0022)*

09 97 13 24-0031	SF	Spray Small Vessel/Tank 1.5 Mil Prime And Two 1.5 Mil Alkyd Finish Coats	2.23	
		For Up To 100, Add	*1.32*	
		For >100 To 250, Add	*0.64*	
		For >250 To 500, Add	*0.28*	
09 97 13 24-0032	SF	Spray Large Vessel/Tank 1.5 Mil Prime And Two 1.5 Mil Alkyd Finish Coats	1.75	
		For Up To 100, Add	*0.96*	
		For >100 To 250, Add	*0.47*	
		For >250 To 500, Add	*0.20*	
09 97 13 24-0033	SF	Spray Tank Interior 1.5 Mil Prime And Two 1.5 Mil Alkyd Finish Coats	4.08	
		For Up To 100, Add	*2.71*	
		For >100 To 250, Add	*1.28*	
		For >250 To 500, Add	*0.55*	
09 97 13 24-0034	SF	Spray Small Vessel/Tank 1.5 Mil Prime And One 1.5 Mil Alkyd Finish Coats	1.67	
		For Up To 100, Add	*0.99*	
		For >100 To 250, Add	*0.48*	
		For >250 To 500, Add	*0.21*	
09 97 13 24-0035	SF	Spray Large Vessel/Tank 1.5 Mil Prime And One 1.5 Mil Alkyd Finish Coats	1.31	
		For Up To 100, Add	*0.72*	
		For >100 To 250, Add	*0.35*	
		For >250 To 500, Add	*0.15*	
09 97 13 24-0036	SF	Spray Tank Interior 1.5 Mil Prime And One 1.5 Mil Alkyd Finish Coats	3.06	
		For Up To 100, Add	*2.04*	
		For >100 To 250, Add	*0.96*	
		For >250 To 500, Add	*0.42*	
09 97 13 24-0037	SF	Brush Small Vessel/Tank 1.5 Mil Prime And Two 1.5 Mil Alkyd Finish Coats	3.03	
		For Up To 100, Add	*1.92*	
		For >100 To 250, Add	*0.92*	
		For >250 To 500, Add	*0.40*	
09 97 13 24-0038	SF	Brush Large Vessel/Tank 1.5 Mil Prime And Two 1.5 Mil Alkyd Finish Coats	2.31	
		For Up To 100, Add	*1.38*	
		For >100 To 250, Add	*0.66*	
		For >250 To 500, Add	*0.29*	
09 97 13 24-0039	SF	Brush Tank Interior 1.5 Mil Prime And Two 1.5 Mil Alkyd Finish Coats	5.77	
		For Up To 100, Add	*3.98*	
		For >100 To 250, Add	*1.87*	
		For >250 To 500, Add	*0.81*	
09 97 13 24-0040	SF	Brush Small Vessel/Tank 1.5 Mil Prime And One 1.5 Mil Alkyd Finish Coats	2.27	
		For Up To 100, Add	*1.44*	
		For >100 To 250, Add	*0.69*	
		For >250 To 500, Add	*0.30*	
09 97 13 24-0041	SF	Brush Large Vessel/Tank 1.5 Mil Prime And One 1.5 Mil Alkyd Finish Coats	1.73	
		For Up To 100, Add	*1.04*	
		For >100 To 250, Add	*0.50*	
		For >250 To 500, Add	*0.22*	
09 97 13 24-0042	SF	Brush Tank Interior 1.5 Mil Prime And One 1.5 Mil Alkyd Finish Coats	4.32	
		For Up To 100, Add	*2.98*	
		For >100 To 250, Add	*1.40*	
		For >250 To 500, Add	*0.61*	

09 97 13 24-0043 Touch-Up And Two 1.5 Mil Alkyd Finish Coats For Tanks *(09 97 13 24-0022)*

09 97 13 24-0044	SF	Spray Small Vessel/Tank Touch-Up And Two 1.5 Mil Alkyd Finish Coats	1.98	
		For Up To 100, Add	*1.23*	
		For >100 To 250, Add	*0.59*	
		For >250 To 500, Add	*0.26*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 97 13 24-0045	SF	Spray Large Vessel/Tank Touch-Up And Two 1.5 Mil Alkyd Finish Coats	1.69	
		For Up To 100, Add	*1.02*	
		For >100 To 250, Add	*0.49*	
		For >250 To 500, Add	*0.21*	
09 97 13 24-0046	SF	Spray Tank Interior Touch-Up And Two 1.5 Mil Alkyd Finish Coats	4.21	
		For Up To 100, Add	*2.91*	
		For >100 To 250, Add	*1.37*	
		For >250 To 500, Add	*0.59*	
09 97 13 24-0047	SF	Spray Small Vessel/Tank Touch-Up And One 1.5 Mil Alkyd Finish Coat	1.27	
		For Up To 100, Add	*0.79*	
		For >100 To 250, Add	*0.38*	
		For >250 To 500, Add	*0.16*	
09 97 13 24-0048	SF	Spray Large Vessel/Tank Touch-Up And One 1.5 Mil Alkyd Finish Coat	1.07	
		For Up To 100, Add	*0.64*	
		For >100 To 250, Add	*0.31*	
		For >250 To 500, Add	*0.13*	
09 97 13 24-0049	SF	Spray Tank Interior Touch-Up And One 1.5 Mil Alkyd Finish Coats	2.69	
		For Up To 100, Add	*1.86*	
		For >100 To 250, Add	*0.87*	
		For >250 To 500, Add	*0.38*	
09 97 13 24-0050	SF	Brush Small Vessel/Tank Touch-Up And Two 1.5 Mil Alkyd Finish Coats	2.52	
		For Up To 100, Add	*1.64*	
		For >100 To 250, Add	*0.78*	
		For >250 To 500, Add	*0.34*	
09 97 13 24-0051	SF	Brush Large Vessel/Tank Touch-Up And Two 1.5 Mil Alkyd Finish Coats	2.13	
		For Up To 100, Add	*1.35*	
		For >100 To 250, Add	*0.64*	
		For >250 To 500, Add	*0.28*	
09 97 13 24-0052	SF	Brush Tank Interior Touch-Up And Two 1.5 Mil Alkyd Finish Coats	5.89	
		For Up To 100, Add	*4.26*	
		For >100 To 250, Add	*1.99*	
		For >250 To 500, Add	*0.86*	
09 97 13 24-0053	SF	Brush Small Vessel/Tank Touch-Up And One 1.5 Mil Alkyd Finish Coat	1.62	
		For Up To 100, Add	*1.05*	
		For >100 To 250, Add	*0.50*	
		For >250 To 500, Add	*0.22*	
09 97 13 24-0054	SF	Brush Large Vessel/Tank Touch-Up And One 1.5 Mil Alkyd Finish Coat	1.37	
		For Up To 100, Add	*0.87*	
		For >100 To 250, Add	*0.41*	
		For >250 To 500, Add	*0.18*	
09 97 13 24-0055	SF	Brush Tank Interior Touch-Up And One 1.5 Mil Alkyd Finish Coats	3.87	
		For Up To 100, Add	*2.74*	
		For >100 To 250, Add	*1.29*	
		For >250 To 500, Add	*0.55*	

09 97 13 24-0056 2 Mil Prime And Two 2 Mil Epoxy Polyamide Cured Resin Finish Coats For Tanks *(09 97 13 24-0022)*

09 97 13 24-0057	SF	Spray Small Vessel/Tank 2 Mil Prime And Two 2 Mil Epoxy Polyamide Cured Resin Finish Coats	2.91	
		For Up To 100, Add	*1.49*	
		For >100 To 250, Add	*0.73*	
		For >250 To 500, Add	*0.32*	
09 97 13 24-0058	SF	Spray Large Vessel/Tank 2 Mil Prime And Two 2 Mil Epoxy Polyamide Cured Resin Finish Coats	2.52	
		For Up To 100, Add	*1.19*	
		For >100 To 250, Add	*0.59*	
		For >250 To 500, Add	*0.26*	
09 97 13 24-0059	SF	Spray Small Vessel/Tank Two 2 Mil Epoxy Polyamide Cured Resin Finish Coats	2.04	
		For Up To 100, Add	*1.04*	
		For >100 To 250, Add	*0.51*	
		For >250 To 500, Add	*0.23*	
09 97 13 24-0060	SF	Spray Large Vessel/Tank Two 2 Mil Epoxy Polyamide Cured Resin Finish Coats	1.76	
		For Up To 100, Add	*0.83*	
		For >100 To 250, Add	*0.41*	
		For >250 To 500, Add	*0.18*	

09 97 13 24-0061 2 Mil Prime And Two 6 Mil High Build Epoxy Finish Coats For Tanks *(09 97 13 24-0022)*

09 97 13 24-0062	SF	Spray Small Vessel/Tank 2 Mil Prime And Two 6 Mil High Build Epoxy Finish Coats	3.24	
		For Up To 100, Add	*1.54*	
		For >100 To 250, Add	*0.76*	
		For >250 To 500, Add	*0.34*	
09 97 13 24-0063	SF	Spray Large Vessel/Tank 2 Mil Prime And Two 6 Mil High Build Epoxy Finish Coats	2.85	
		For Up To 100, Add	*1.24*	
		For >100 To 250, Add	*0.63*	
		For >250 To 500, Add	*0.28*	
09 97 13 24-0064	SF	Spray Small Vessel/Tank Two 6 Mil High Build Epoxy Finish Coats	2.65	
		For Up To 100, Add	*1.26*	
		For >100 To 250, Add	*0.62*	
		For >250 To 500, Add	*0.28*	
09 97 13 24-0065	SF	Spray Large Vessel/Tank Two 6 Mil High Build Epoxy Finish Coats	2.33	
		For Up To 100, Add	*1.02*	
		For >100 To 250, Add	*0.51*	
		For >250 To 500, Add	*0.23*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 97 13 24-0066		1 Mil Prime, Three 2.33 Mil Body Coats And Two 1 Mil Vinyl Finish Coats For Tanks *(09 97 13 24-0022)*		
09 97 13 24-0067	SF	Spray Small Vessel/Tank 1 Mil Prime, Three 2.33 Mil Body Coats And Two 1 Mil Vinyl Finish Coats	7.69	
		For Up To 100, Add	*4.07*	
		For >100 To 250, Add	*1.98*	
		For >250 To 500, Add	*0.87*	
09 97 13 24-0068	SF	Spray Large Vessel/Tank 1 Mil Prime, Three 2.33 Mil Body Coats And Two 1 Mil Vinyl Finish Coats	7.11	
		For Up To 100, Add	*3.63*	
		For >100 To 250, Add	*1.78*	
		For >250 To 500, Add	*0.78*	
09 97 13 24-0069	SF	Spray Tank Interior 1 Mil Prime, Three 2.33 Mil Body Coats And Two 1 Mil Vinyl Finish Coats	11.57	
		For Up To 100, Add	*6.98*	
		For >100 To 250, Add	*3.34*	
		For >250 To 500, Add	*1.45*	
09 97 13 24-0070		1.5 Mil Prime And Two 4 Mil High Build Vinyl Finish Coats For Tanks *(09 97 13 24-0022)*		
09 97 13 24-0071	SF	Spray Small Vessel/Tank 1.5 Mil Prime And Two 4 Mil High Build Vinyl Finish Coats	4.07	
		For Up To 100, Add	*1.92*	
		For >100 To 250, Add	*0.95*	
		For >250 To 500, Add	*0.42*	
09 97 13 24-0072	SF	Spray Large Vessel/Tank 1.5 Mil Prime And Two 4 Mil High Build Vinyl Finish Coats	3.64	
		For Up To 100, Add	*1.60*	
		For >100 To 250, Add	*0.80*	
		For >250 To 500, Add	*0.36*	
09 97 13 24-0073	SF	Spray Tank Interior 1.5 Mil Prime And Two 4 Mil High Build Vinyl Finish Coats	5.97	
		For Up To 100, Add	*3.34*	
		For >100 To 250, Add	*1.62*	
		For >250 To 500, Add	*0.71*	
09 97 13 24-0074	SF	Spray Small Vessel/Tank Two 4 Mil High Build Vinyl Finish Coats	3.21	
		For Up To 100, Add	*1.51*	
		For >100 To 250, Add	*0.75*	
		For >250 To 500, Add	*0.33*	
09 97 13 24-0075	SF	Spray Large Vessel/Tank Two 4 Mil High Build Vinyl Finish Coats	2.87	
		For Up To 100, Add	*1.26*	
		For >100 To 250, Add	*0.63*	
		For >250 To 500, Add	*0.28*	
09 97 13 24-0076	SF	Spray Tank Interior Two 4 Mil High Build Vinyl Finish Coats	4.72	
		For Up To 100, Add	*2.65*	
		For >100 To 250, Add	*1.28*	
		For >250 To 500, Add	*0.56*	
09 97 13 24-0077		Two 8 Mil Coal Tar Epoxy Coats For Tanks *(09 97 13 24-0022)*		
09 97 13 24-0078	SF	Spray Small Vessel/Tank Two 8 Mil Coal Tar Epoxy Coats	3.60	
		For Up To 100, Add	*2.06*	
		For >100 To 250, Add	*0.99*	
		For >250 To 500, Add	*0.43*	
09 97 13 24-0079	SF	Spray Large Vessel/Tank Two 8 Mil Coal Tar Epoxy Coats	3.02	
		For Up To 100, Add	*1.62*	
		For >100 To 250, Add	*0.79*	
		For >250 To 500, Add	*0.35*	
09 97 13 24-0080	SF	Spray Tank Interior Two 8 Mil Coal Tar Epoxy Coats	4.57	
		For Up To 100, Add	*2.79*	
		For >100 To 250, Add	*1.33*	
		For >250 To 500, Add	*0.58*	
09 97 13 24-0081		One 1 Mil Primer, One 3 Mil Intermediate And One 1 Mil Chlorinated Rubber Finish Coat For Tanks *(09 97 13 24-0022)*		
09 97 13 24-0082	SF	Spray Small Vessel/Tank One 1 Mil Primer, One 3 Mil Intermediate And One 1 Mil Chlorinated Rubber Finish Coat	2.49	
		For Up To 100, Add	*1.36*	
		For >100 To 250, Add	*0.66*	
		For >250 To 500, Add	*0.29*	
09 97 13 24-0083	SF	Spray Large Vessel/Tank One 1 Mil Primer, One 3 Mil Intermediate And One 1 Mil Chlorinated Rubber Finish Coat	2.29	
		For Up To 100, Add	*1.21*	
		For >100 To 250, Add	*0.59*	
		For >250 To 500, Add	*0.26*	
09 97 13 24-0084	SF	Spray Tank Interior One 1 Mil Primer, One 3 Mil Intermediate And One 1 Mil Chlorinated Rubber Finish Coat	3.76	
		For Up To 100, Add	*2.32*	
		For >100 To 250, Add	*1.11*	
		For >250 To 500, Add	*0.48*	
09 97 13 24-0085		Two 6 Mil High Build Epoxy Finish Coats For Tanks Interior *(09 97 13 24-0022)*		
09 97 13 24-0086	SF	Spray Small Tank Interior Two 6 Mil High Build Epoxy Finish Coats	5.47	
		For Up To 100, Add	*3.15*	
		For >100 To 250, Add	*1.52*	
		For >250 To 500, Add	*0.66*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
09 97 13 24-0087	SF	Spray Large Tank Interior Two 6 Mil High Build Epoxy Finish Coats	3.38	
		For Up To 100, Add	*1.68*	
		For >100 To 250, Add	*0.83*	
		For >250 To 500, Add	*0.36*	
09 97 13 24-0088		One 3 Mil High Zinc Silicate Coat For Tanks *(09 97 13 24-0022)*		
09 97 13 24-0089	SF	Spray Small Vessel/Tank One 3 Mil High Zinc Silicate Coat	1.62	
		For Up To 100, Add	*0.71*	
		For >100 To 250, Add	*0.35*	
		For >250 To 500, Add	*0.16*	
09 97 13 24-0090	SF	Spray Large Vessel/Tank One 3 Mil High Zinc Silicate Coat	1.59	
		For Up To 100, Add	*0.68*	
		For >100 To 250, Add	*0.34*	
		For >250 To 500, Add	*0.15*	
09 97 13 24-0091	SF	Spray Tank Interior One 3 Mil High Zinc Silicate Coat	2.50	
		For Up To 100, Add	*1.37*	
		For >100 To 250, Add	*0.66*	
		For >250 To 500, Add	*0.29*	
09 97 13 24-0092		Two 1.5 Mil Vinyl Enamel Finish Coats For Tanks *(09 97 13 24-0022)*		
		Note: Installed over existing primer.		
09 97 13 24-0093	SF	Spray Small Vessel/Tank Two 1.5 Mil Vinyl Enamel Finish Coats	2.63	
		For Up To 100, Add	*1.38*	
		For >100 To 250, Add	*0.68*	
		For >250 To 500, Add	*0.30*	
09 97 13 24-0094	SF	Spray Large Vessel/Tank Two 1.5 Mil Vinyl Enamel Finish Coats	2.34	
		For Up To 100, Add	*1.17*	
		For >100 To 250, Add	*0.57*	
		For >250 To 500, Add	*0.25*	
09 97 13 24-0095	SF	Spray Tank Interior Two 1.5 Mil Vinyl Enamel Finish Coats	3.61	
		For Up To 100, Add	*2.12*	
		For >100 To 250, Add	*1.02*	
		For >250 To 500, Add	*0.44*	
09 97 13 24-0096		One 1 Mil Primer And 95 Mil Hot Coal Tar Enamel Finish Coat For Tanks *(09 97 13 24-0022)*		
09 97 13 24-0097	SF	Spray/Mop Large Vessel/Tank One 1 Mil Primer And 95 Mil Hot Coal Tar Enamel Finish Coat	9.40	
		For Up To 100, Add	*5.84*	
		For >100 To 250, Add	*2.79*	
		For >250 To 500, Add	*1.21*	
09 97 26		**Cementitious Coatings** *(09 97)*		
09 97 26 13		**Interior Cementitious Coatings** *(09 97 26)*		
09 97 26 13-0001		Ceramic-Like Glazed Coating *(09 97 26 13)*		
09 97 26 13-0002		Ceramic-Like Glazed Coating, Cementitious *(09 97 26 13-0001)*		
09 97 26 13-0003	SF	Ceramic-like Glazed Coating. - Cementitious	2.90	
09 97 26 13-0004		Ceramic-Like Glazed Coating, Resin Base *(09 97 26 13-0001)*		
09 97 26 13-0005	SF	Ceramic-like Glazed Coating - Resin	2.45	
09 97 35		**Dry Erase Coatings** *(09 97)*		
09 97 35 00-0001		Dry-Erase Paint *(09 97 35)*		
09 97 35 00-0002		Dry-Erase Paint (IdeaPaint™ PRO) *(09 97 35 00-0001)*		
09 97 35 00-0003	SF	Dry-Erase Paint (IdeaPaint™ PRO), Applied With Roller	13.32	
		Note: Includes two coats of primer and white, white sand, light beige or light gray surface.		
09 97 35 00-0004		Low VOC/Odorless, Dry-Erase Paint (IdeaPaint™ CREATE) *(09 97 35 00-0001)*		
09 97 35 00-0005	SF	Clear, Low VOC/Odorless, Dry-Erase Paint (IdeaPaint™ CREATE), Applied With Roller	7.37	
		Note: For application over existing latex-based top coats.		
09 97 35 00-0006	SF	Black Or White, Low VOC/Odorless, Dry-Erase Paint (IdeaPaint™ CREATE), Applied With Roller	14.25	
		Note: Includes two coats of primer and white or black surface coat.		
09 97 63		**Special Coatings and Protection Systems** *(09 97)*		
09 97 63 00-0001		Acrylic Glazed Coating *(09 97 63)*		
09 97 63 00-0002	SF	Acrylic Glazed Coating	1.90	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

END OF SECTION 09

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

THIS PAGE INTENTIONALLY LEFT BLANK

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

13 Special Construction

13 40 Integrated Construction *(13)*

13 46 Lightning Protection Systems *(13 40)*

13 46 13 Lightning Protection for Structures *(13 46)*

13 46 13 00-0001 Lightning Protection *(13 46 13)*

13 46 13 00-0002 Air Terminals For Lightning Protection *(13 46 13 00-0001)*

13 46 13 00-0003 Copper Lightning Protection Air Terminals *(13 46 13 00-0002)*

13 46 13 00-0004	EA	3/8" x 10" Copper Lightning Protection Air Terminal	74.25	11.28
13 46 13 00-0005	EA	1/2" x 12" Copper Lightning Protection Air Terminal	92.00	11.28
13 46 13 00-0006	EA	5/8" x 12" Copper Lightning Protection Air Terminal	120.66	11.28
13 46 13 00-0007	EA	1/2" x 24" Copper Lightning Protection Air Terminal	134.05	11.28
13 46 13 00-0008	EA	1/2" x 60" Copper Lightning Protection Air Terminal	262.06	22.56

13 46 13 00-0009 Aluminum Lightning Protection Air Terminals *(13 46 13 00-0002)*

13 46 13 00-0010	EA	3/8" x 10" Aluminum Lightning Protection Air Terminal	40.17	11.28
13 46 13 00-0011	EA	1/2" x 12" Aluminum Lightning Protection Air Terminal	51.81	11.28
13 46 13 00-0012	EA	5/8" x 12" Aluminum Lightning Protection Air Terminal	63.50	11.28
13 46 13 00-0013	EA	1/2" x 24" Aluminum Lightning Protection Air Terminal	70.94	11.28
13 46 13 00-0014	EA	1/2" x 60" Aluminum Lightning Protection Air Terminal	132.17	22.56

13 46 13 00-0015 Terminal Bases For Lightning Protection *(13 46 13 00-0001)*

13 46 13 00-0016 Copper Lightning Protection Terminal Bases *(13 46 13 00-0015)*

13 46 13 00-0017	EA	Adhesive Base For Copper Lightning Protection Terminal	93.97	33.84
13 46 13 00-0018	EA	Bolted Base For Copper Lightning Protection Terminal	121.01	45.12
13 46 13 00-0019	EA	Hinged Base For Copper Lightning Protection Terminal	165.00	56.40
13 46 13 00-0020	EA	Side Mounted Base For Copper Lightning Protection Terminal	121.01	45.12
13 46 13 00-0021	EA	Offset Point Support For Copper Lightning Protection Terminal	130.31	45.12
13 46 13 00-0022	EA	Concealed Base Assembly For Copper Lightning Protection Terminal	229.36	90.24
13 46 13 00-0023	EA	36" Tripod Base For 60" Copper Lightning Protection Terminal	162.57	56.40
13 46 13 00-0024	EA	Intermediate Base For Copper Lightning Protection Terminal	93.97	33.84

13 46 13 00-0025 Aluminum Lightning Protection Terminal Bases *(13 46 13 00-0015)*

13 46 13 00-0026	EA	Adhesive Base For Aluminum Lightning Protection Terminal	72.33	33.84
13 46 13 00-0027	EA	Bolted Base For Aluminum Lightning Protection Terminal	106.55	45.12
13 46 13 00-0028	EA	Hinged Base For Aluminum Lightning Protection Terminal	138.44	56.40
13 46 13 00-0029	EA	Side Mounted Base For Aluminum Lightning Protection Terminal	106.72	45.12
13 46 13 00-0030	EA	Offset Point Support For Aluminum Lightning Protection Terminal	109.20	45.12
13 46 13 00-0031	EA	Concealed Base Assembly For Aluminum Lightning Protection Terminal	201.56	90.24
13 46 13 00-0032	EA	36" Tripod Base For 60" Aluminum Lightning Protection Terminal	142.86	56.40
13 46 13 00-0033	EA	Intermediate Base For Aluminum Lightning Protection Terminal	72.33	33.84

13 46 13 00-0034 Connectors *(13 46 13 00-0001)*

13 46 13 00-0035 Copper Cable Connectors *(13 46 13 00-0034)*

13 46 13 00-0036	EA	Thru Wall Cable Connector For Copper Lightning Protection System	189.63	56.40
13 46 13 00-0037	EA	Thru Roof Adapter Assembly For Copper Lightning Protection System	254.50	90.24
13 46 13 00-0038	EA	Beam Connector For Copper Lightning Protection System	166.69	56.40
13 46 13 00-0039	EA	Double Bolt Cable Connector For Copper Lightning Protection System	40.96	11.28
13 46 13 00-0040	EA	Cable To Bar Connector For Copper Lightning Protection System	42.52	11.28
13 46 13 00-0041	EA	Tee Connector For Copper Lightning Protection Terminal	128.36	33.84

13 46 13 00-0042 Aluminum Cable Connectors *(13 46 13 00-0034)*

13 46 13 00-0043	EA	Thru Wall Cable Connector For Aluminum Lightning Protection System	146.05	56.40
13 46 13 00-0044	EA	Thru Roof Adapter Assembly For Aluminum Lightning Protection System	211.73	90.24
13 46 13 00-0045	EA	Beam Connector For Aluminum Lightning Protection System	140.74	56.40
13 46 13 00-0046	EA	Double Bolt Cable Connector For Aluminum Lightning Protection System	30.93	11.28
13 46 13 00-0047	EA	Tee Connector For Aluminum Lightning Protection Terminal	91.99	33.84

13 46 13 00-0048 Bonding Plates *(13 46 13 00-0001)*

13 46 13 00-0049 Copper Bonding Plates *(13 46 13 00-0048)*

13 46 13 00-0050	EA	8" Square I Beam Bonding Plate For Copper Lightning Protection System	144.53	56.40
13 46 13 00-0051	EA	8" Square Purlin Bonding Plate For Copper Lightning Protection System	150.22	56.40
13 46 13 00-0052	EA	16" Square Bonding Plate For Copper Lightning Protection System	220.26	90.24

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
13 46 13 00-0053		Aluminum Bonding Plates *(13 46 13 00-0048)*		
13 46 13 00-0054	EA	8" Square I Beam Bonding Plate For Aluminum Lightning Protection System	129.25	56.40
13 46 13 00-0055	EA	8" Square Purlin Bonding Plate For Aluminum Lightning Protection System	132.08	56.40
13 46 13 00-0056	EA	16" Square Bonding Plate For Aluminum Lightning Protection System	194.31	90.24
13 46 13 00-0057		Cable Supports *(13 46 13 00-0001)*		
13 46 13 00-0058		Copper Cable Supports *(13 46 13 00-0057)*		
13 46 13 00-0059	EA	Loop Fastener, Copper Cable Supports For Lightning Protection System	27.60	11.28
13 46 13 00-0060	EA	Adhesive Cable Holder, Copper Cable Support For Lightning Protection System	28.68	11.28
13 46 13 00-0061		Aluminum Cable Supports *(13 46 13 00-0057)*		
13 46 13 00-0062	EA	Loop Fastener, Aluminum Cable Supports For Lightning Protection System	25.54	11.28
13 46 13 00-0063	EA	Adhesive Cable Holder, Aluminum Cable Support For Lightning Protection System	25.35	11.28
13 46 13 00-0064		Bonding Straps *(13 46 13 00-0001)*		
13 46 13 00-0065		Copper Bonding Straps *(13 46 13 00-0064)*		
13 46 13 00-0066	EA	3/4" x 9-1/2" Flex Braided Strap For Copper Lightning Protection System	76.89	33.84
13 46 13 00-0067		Aluminum Bonding Straps *(13 46 13 00-0064)*		
13 46 13 00-0068	EA	3/4" x 9-1/2" Flex Braided Strap For Aluminum Lightning Protection System	66.32	33.84
13 46 13 00-0069		Accessories For Lightning Protection *(13 46 13 00-0001)*		
13 46 13 00-0070		Copper Adapters *(13 46 13 00-0069)*		
13 46 13 00-0071	EA	Swivel Adapters For Copper Lightning Protection System	32.23	5.64
13 46 13 00-0072		Aluminum Adapters *(13 46 13 00-0069)*		
13 46 13 00-0073	EA	Swivel Adapters For Aluminum Lightning Protection System	21.68	5.64
13 46 13 00-0074	EA	Floor Ground Receptacle For Aluminum Lightning Protection System	179.63	56.40

END OF SECTION 13

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

26 Electrical

Note: Termination costs are included with all electrical equipment, panel boards, fixtures and devices. Terminations are not included with patch panels. Electricial equipment and lighting shall conform to California Title 24.

26 01 Operation and Maintenance of Electrical Systems *(26)*

26 01 10 Operation and Maintenance of Medium-Voltage Electrical Distribution *(26 01)*

26 01 10 91 Medium-Voltage Electrical Distribution Restoration *(26 01 10)*

26 01 10 91-0001 Retrofit Distribution Enclosures *(26 01 10 91)*
Note: Includes removal of equipment housing, punch or drill hole for window, touch-up area, and reinstallation of equipment housing.

26 01 10 91-0002	EA	2" Infrared Window Installed In Medium Voltage Equipment, NEMA Type 3/12 Rated (Flir IRW-2C) Note: 2mm thick, aluminum frame, hinged cover.	526.97	
		For Up To 20, Add	*114.32*	
		For >20 To 50, Add	*91.46*	
		For >50 To 100, Add	*45.73*	
26 01 10 91-0003	EA	3" Infrared Window Installed In Medium Voltage Equipment, NEMA Type 3/12 Rated (Flir IRW-3C) Note: 2mm thick, aluminum frame, hinged cover.	690.88	
		For Up To 20, Add	*155.30*	
		For >20 To 50, Add	*124.24*	
		For >50 To 100, Add	*62.12*	
26 01 10 91-0004	EA	4" Infrared Window Installed In Medium Voltage Equipment, NEMA Type 3/12 Rated (Flir IRW-4C) Note: 4mm thick, aluminum frame, hinged cover.	1,051.46	
		For Up To 20, Add	*245.45*	
		For >20 To 50, Add	*196.36*	
		For >50 To 100, Add	*98.18*	
26 01 10 91-0005	EA	2" Infrared Window Installed In Medium Voltage Equipment, NEMA Type 3/12 Rated (Fluke CLKT-2) Note: 2mm thick, aluminum frame, twist cover.	525.18	
		For Up To 20, Add	*113.88*	
		For >20 To 50, Add	*91.10*	
		For >50 To 100, Add	*45.55*	
26 01 10 91-0006	EA	3" Infrared Window Installed In Medium Voltage Equipment, NEMA Type 3/12 Rated (Fluke CLKT-3) Note: 2mm thick, aluminum frame, twist cover.	677.53	
		For Up To 20, Add	*151.96*	
		For >20 To 50, Add	*121.57*	
		For >50 To 100, Add	*60.79*	
26 01 10 91-0007	EA	4" Infrared Window Installed In Medium Voltage Equipment, NEMA Type 3/12 Rated (Fluke CLKT-4) Note: 4mm thick, aluminum frame, twist cover.	1,021.82	
		For Up To 20, Add	*238.04*	
		For >20 To 50, Add	*190.43*	
		For >50 To 100, Add	*95.21*	
26 01 10 91-0008	EA	2" Infrared Window Pane Installed In Medium Voltage Equipment, NEMA Type 4 Rated (Schneider Electric VPFR) Note: 0.25mm thick, composite frame, metal grille reinforced polymer.	408.96	
		For Up To 20, Add	*84.82*	
		For >20 To 50, Add	*67.86*	
		For >50 To 100, Add	*33.93*	
26 01 10 91-0009	EA	3" Infrared Window Pane Installed In Medium Voltage Equipment, NEMA Type 4 Rated (Schneider Electric VPFR) Note: 0.25mm thick, composite frame, metal grille reinforced polymer.	585.98	
		For Up To 20, Add	*129.08*	
		For >20 To 50, Add	*103.26*	
		For >50 To 100, Add	*51.63*	
26 01 10 91-0010	EA	4" Infrared Window Pane Installed In Medium Voltage Equipment, NEMA Type 4 Rated (Schneider Electric VPFR) Note: 0.25mm thick, composite frame, metal grille reinforced polymer.	844.13	
		For Up To 20, Add	*193.61*	
		For >20 To 50, Add	*154.89*	
		For >50 To 100, Add	*77.45*	
26 01 10 91-0011	EA	2" Infrared Window Installed In Medium Voltage Equipment, Longwave, NEMA Type 4 Rated (Schneider Electric IRHVIR) Note: 4mm thick, aluminum frame, magnetic cover.	767.53	
		For Up To 20, Add	*174.46*	
		For >20 To 50, Add	*139.57*	
		For >50 To 100, Add	*69.79*	
26 01 10 91-0012	EA	3" Infrared Window Installed In Medium Voltage Equipment, Longwave, NEMA Type 4 Rated (Schneider Electric IRHVIR) Note: 4mm thick, aluminum frame, magnetic cover.	1,063.69	
		For Up To 20, Add	*248.50*	
		For >20 To 50, Add	*198.80*	
		For >50 To 100, Add	*99.40*	
26 01 10 91-0013	EA	4" Infrared Window Installed In Medium Voltage Equipment, Longwave, NEMA Type 4 Rated (Schneider Electric IRHVIR) Note: 4mm thick, aluminum frame, magnetic cover.	1,968.25	
		For Up To 20, Add	*474.64*	
		For >20 To 50, Add	*379.71*	
		For >50 To 100, Add	*189.86*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 10 91-0014	EA	3" Infrared Window Installed In Medium Voltage Equipment, Shortwave, NEMA Type 4 Rated (Schneider Electric IRHVIR)	885.25	
		Note: 4mm thick, aluminum frame, magnetic cover.		
		For Up To 20, Add	*203.89*	
		For >20 To 50, Add	*163.11*	
		For >50 To 100, Add	*81.56*	
26 01 10 91-0015	EA	4" Infrared Window Installed In Medium Voltage Equipment, Shortwave, NEMA Type 4 Rated (Schneider Electric IRHVIR)	1,314.07	
		Note: 4mm thick, aluminum frame, magnetic cover.		
		For Up To 20, Add	*311.10*	
		For >20 To 50, Add	*248.88*	
		For >50 To 100, Add	*124.44*	

26 01 20 Operation and Maintenance of Low-Voltage Electrical Distribution *(26 01)*

26 01 20 91 Low-Voltage Electrical Distribution Restoration *(26 01 20)*

26 01 20 91-0001 Lock Out/Tag Out Devices *(26 01 20 91)*

Note: Includes following OSHA procedures and completing Owner's paperwork. Excludes circuit tracing.

26 01 20 91-0002	EA	Lock Out/Tag Out Local Disconnect	40.68
		Note: Excludes tag or padlock See CSI section 26 01 20 91-0004 for padlock, 26 01 20 91-0005 for tag(s).	
26 01 20 91-0003	EA	Lock Out/Tag Out Breaker Or Motor Starter	40.68
		Note: Excludes tag or padlock See CSI section 26 01 20 91-0004 for padlock, 26 01 20 91-0005 for tag(s).	
26 01 20 91-0004	EA	Lock Out Padlock Device	11.30
		Note: Includes the installation and removal of pad lock when required	
26 01 20 91-0005	EA	Lock Out Tags	4.67
		Note: Includes filling out tag information, installation and removal of identifying tags.	

26 01 20 91-0006 Existing Circuit Tracing *(26 01 20 91)*

26 01 20 91-0007	EA	Motors, Diconnects And Other Single Source Devices, Existing Circuit Tracing Per Device	23.50
26 01 20 91-0008	EA	Lighting, Existing Circuit Tracing Per Circuit	23.50

26 01 26 Maintenance Testing of Electrical Systems *(26 01)*

26 01 26 00-0001 NETA Electrical Maintenance Testing *(26 01 26)*

26 01 26 00-0002	EA	600 Volt Cable Insulation NETA Electrical Maintenance Testing Per Conductor	363.75
26 01 26 00-0003	EA	NETA Field Maintenance Testing Of Aged Medium Voltage (5 KV - 15 KV) Cables, Per Cable	485.00
		Note: Provide test equipment, labor, and technical personnel as necessary to perform the electrical maintenance tests. Perform Full Dielectric-Absorption (Megger) test, DC High Potential test and provide "Final Test Report".	
26 01 26 00-0004	EA	Panel Board NETA Electrical Maintenance Testing	363.75
		Note: Excludes metering and CT's.	
26 01 26 00-0005	EA	Primary Injection Breaker NETA Electrical Maintenance Testing	545.62
		Note: Includes setting breaker 3 phase from 400 amperes to 1,200 amperes.	
26 01 26 00-0006	EA	Primary Injection Breaker NETA Electrical Maintenance Testing	727.50
		Note: Includes setting breaker 3 phase from 1,200 amperes to 2,000 amperes.	
26 01 26 00-0007	EA	Primary And Secondary Injection Low Voltage Air Circuit Breaker NETA Electrical Maintenance Testing	1,091.25
		Note: Includes CT ratio test to include setting breaker 3 phase 400A to 2000A. Excludes breaker removal from gear.	
26 01 26 00-0008	EA	Single, Primary And Secondary Acceptance Test, 400 Amperes Circuit Breaker NETA Electrical Maintenance Testing	727.50
		Note: Includes CT ratio test to include setting breaker 3 phase 400 Amperes to 2000 Amperes. Excludes breaker removal from gear.	
26 01 26 00-0009	EA	2 To 3, Primary And Secondary Acceptance Test, 400 Amperes Circuit Breaker NETA Electrical Maintenance Testing	454.69
		Note: Includes CT ratio test to include setting breaker 3 phase 400 Amperes to 2,000 Amperes. Excludes breaker removal from gear.	
26 01 26 00-0010	EA	4 Or More, Primary And Secondary Acceptance Test, 400 Amperes Circuit Breaker NETA Electrical Testing	318.28
		Note: Includes CT ratio test to include setting breaker 3 phase 400 Amperes to 2000 Amperes. Excludes breaker removal from gear.	

26 01 26 00-0011 TTR Maintenance Testing Or Meggar Maintenance Testing of Transformers *(26 01 26)*

Note: Includes all required small tools and equipment. Use other MRO tasks required to remove equipment cover.

26 01 26 00-0012 TTR Maintenance Testing Or Meggar Maintenance Testing of Transformers, Not Connected *(26 01 26 00-0011)*

26 01 26 00-0013	EA	TTR Or Megger Maintenance Testing Of Up To 15 KVA, Single Phase Transformer, Not Connected	28.20
26 01 26 00-0014	EA	TTR Or Megger Maintenance Testing Of >15 To 50 KVA, Single Phase Transformer, Not Connected	47.00
26 01 26 00-0015	EA	TTR Or Megger Maintenance Testing Of 75 KVA, Single Phase Transformer, Not Connected	65.80
26 01 26 00-0016	EA	TTR Or Megger Maintenance Testing Of 100 KVA, Single Phase Transformer, Not Connected	84.60
26 01 26 00-0017	EA	TTR Or Megger Maintenance Testing Of 150 KVA, Single Phase Transformer, Not Connected	103.40
26 01 26 00-0018	EA	TTR Or Megger Maintenance Testing Of 167 KVA, Single Phase Transformer, Not Connected	122.20
26 01 26 00-0019	EA	TTR Or Megger Maintenance Testing Of 200 KVA, Single Phase Transformer, Not Connected	131.60
26 01 26 00-0020	EA	TTR Or Megger Maintenance Testing Of 250 KVA, Single Phase Transformer, Not Connected	141.01
26 01 26 00-0021	EA	TTR Or Megger Maintenance Testing Of Up To 15 KVA, Three Phase Transformer, Not Connected	47.00
26 01 26 00-0022	EA	TTR Or Megger Maintenance Testing Of >15 To 45 KVA, Three Phase Transformer, Not Connected	65.80
26 01 26 00-0023	EA	TTR Or Megger Maintenance Testing Of 75 KVA, Three Phase Transformer, Not Connected	84.60
26 01 26 00-0024	EA	TTR Or Megger Maintenance Testing Of 112.5 KVA, Three Phase Transformer, Not Connected	94.00

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 26 00-0025	EA	TTR Or Megger Maintenance Testing Of 150 KVA, Three Phase Transformer, Not Connected	131.60	
26 01 26 00-0026	EA	TTR Or Megger Maintenance Testing Of 225 KVA, Three Phase Transformer, Not Connected	150.40	
26 01 26 00-0027	EA	TTR Or Megger Testing Of 300 KVA, Three Phase Transformer, Not Connected	169.20	

26 01 26 00-0028 TTR Maintenance Testing Or Meggar Maintenance Testing of Transformers, Connected *(26 01 26 00-0011)*

26 01 26 00-0029	EA	TTR Or Megger Maintenance Testing Of Up To 15 KVA, Single Phase Transformer, Connected	47.00	
26 01 26 00-0030	EA	TTR Or Megger Maintenance Testing Of >15 To 50 KVA, Single Phase Transformer, Connected	65.80	
26 01 26 00-0031	EA	TTR Or Megger Maintenance Testing Of 75 KVA, Single Phase Transformer, Connected	75.20	
26 01 26 00-0032	EA	TTR Or Megger Maintenance Testing Of 100 KVA, Single Phase Transformer, Connected	94.00	
26 01 26 00-0033	EA	TTR Or Megger Maintenance Testing Of 150 KVA, Single Phase Transformer, Connected	131.60	
26 01 26 00-0034	EA	TTR Or Megger Maintenance Testing Of 167 KVA, Single Phase Transformer, Connected	159.80	
26 01 26 00-0035	EA	TTR Or Megger Maintenance Testing Of 200 KVA, Single Phase Transformer, Connected	169.20	
26 01 26 00-0036	EA	TTR Or Megger Maintenance Testing Of 250 KVA, Single Phase Transformer, Connected	178.60	
26 01 26 00-0037	EA	TTR Or Megger Maintenance Testing Of Up To 15 KVA, Three Phase Transformer, Connected	65.80	
26 01 26 00-0038	EA	TTR Or Megger Maintenance Testing Of >15 To 45 KVA, Three Phase Transformer, Connected	84.60	
26 01 26 00-0039	EA	TTR Or Megger Maintenance Testing Of 75 KVA, Three Phase Transformer, Connected	112.80	
26 01 26 00-0040	EA	TTR Or Megger Maintenance Testing Of 112.5 KVA, Three Phase Transformer, Connected	150.40	
26 01 26 00-0041	EA	TTR Or Megger Maintenance Testing Of 150 KVA, Three Phase Transformer, Connected	169.20	
26 01 26 00-0042	EA	TTR Or Megger Maintenance Testing Of 225 KVA, Three Phase Transformer, Connected	197.40	
26 01 26 00-0043	EA	TTR Or Megger Testing Of 300 KVA, Three Phase Transformer, Connected	253.80	

26 01 30 Operation and Maintenance of Facility Electrical Power Generating and Storing Equipment *(26 01)*

26 01 30 91 Facility Electrical Power Generating and Storing Equipment Restoration *(26 01 30)*

26 01 30 91-0001 Emergency Generator Permits *(26 01 30 91)*

26 01 30 91-0002 Air Pollution Control Board *(26 01 30 91-0001)*

26 01 30 91-0003	EA	APCD Permit To Construct And Operate Emergency Generator	5,181.28	

26 01 50 Operation and Maintenance of Lighting *(26 01)*

26 01 50 51 Luminaire Relamping *(26 01 50)*

26 01 50 51-0001 Replace Lamps In Existing Fixtures *(26 01 50 51)*

Note: Includes removal of existing lamp from fixture and installation of new lamp. Excludes disposal of hazardous lamps.

26 01 50 51-0002 Halogen Lamps *(26 01 50 51-0001)*

26 01 50 51-0003	EA	300 Watt, T3, Tungsten Halogen Lamp	60.33	
26 01 50 51-0004	EA	500 Watt, T3, Tungsten Halogen Lamp	78.83	
26 01 50 51-0005	EA	1,000 Watt, T3, Tungsten Halogen Lamp	119.11	
26 01 50 51-0006	EA	60 Watt, PAR38, Halogen Lamp	27.59	
26 01 50 51-0007	EA	75 Watt, PAR38, Halogen Lamp	27.59	
26 01 50 51-0008	EA	90 Watt, PAR38, Halogen Lamp	25.94	
26 01 50 51-0009	EA	100 Watt, PAR38, Halogen Lamp	25.94	
26 01 50 51-0010	EA	60 Watt, PAR38, Halogen IR Reflective Lamp	37.39	
26 01 50 51-0011	EA	67 Watt, PAR38, Halogen IR Reflective Lamp	41.31	
26 01 50 51-0012	EA	70 Watt, PAR38, Halogen IR Reflective Lamp	40.30	
26 01 50 51-0013	EA	90 Watt, PAR38, Halogen IR Reflective Lamp	43.29	
26 01 50 51-0014	EA	100 Watt, PAR38, Halogen IR Reflective Lamp	43.93	
26 01 50 51-0015	EA	20-50 Watt, 12 Volt MR16 Low-Voltage Halogen Lamp	17.29	
26 01 50 51-0016	EA	20-37 Watt, Infrared Reflecting, 12 Volt MR16 Low-Voltage Halogen Lamp	24.77	
26 01 50 51-0017	EA	50 Watt, Infrared Reflecting, 12 Volt MR16 Low-Voltage Halogen Lamp	23.67	
26 01 50 51-0018	EA	12 Watt, 10 Degree Beam, Base B01, Halogen Lamp (Soraa MR16-65-B01-12-830-10)	23.11	
26 01 50 51-0019	EA	12 Watt, 20 Degree Beam, Base B01, Halogen Lamp (Soraa MR16-75-B01-12-830-20)	23.11	
26 01 50 51-0020	EA	12 Watt, 25 Degree Beam, Base B01, Halogen Lamp (Soraa MR16-75-B01-12-830-25)	25.47	
26 01 50 51-0021	EA	12 Watt, 36 Degree Beam, Base B01, Halogen Lamp (Soraa MR16-75-B01-12-830-36)	25.47	

26 01 50 51-0022 Incandescent Lamps *(26 01 50 51-0001)*

26 01 50 51-0023	EA	100 Watt, Frosted, Interior Incandescent Lamp	6.68	
		For Removal Of Multiple Lamps In A Fixture, Deduct		*-1.87*
26 01 50 51-0024	EA	150 Watt, Frosted, Interior Incandescent Lamp	8.76	
		For Removal Of Multiple Lamps In A Fixture, Deduct		*-1.87*
26 01 50 51-0025	EA	200 Watt, Frosted, Interior Incandescent Lamp	11.11	
		For Removal Of Multiple Lamps In A Fixture, Deduct		*-1.87*
26 01 50 51-0026	EA	300 Watt, PS25, Interior Incandescent Lamp	14.06	
		For Removal Of Multiple Lamps In A Fixture, Deduct		*-1.87*
26 01 50 51-0027	EA	60 Watt, G25, Clear, Interior Incandescent Lamp	10.08	
		For Removal Of Multiple Lamps In A Fixture, Deduct		*-1.87*
26 01 50 51-0028	EA	75 Watt, R20, Interior Incandescent Lamp	16.67	
		For Removal Of Multiple Lamps In A Fixture, Deduct		*-2.24*
26 01 50 51-0029	EA	75 Watt, PAR38, Exterior Incandescent Lamp	20.80	
		For Removal Of Multiple Lamps In A Fixture, Deduct		*-2.24*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 50 51-0030	EA	100 Watt, PAR38, Exterior Incandescent Lamp	19.15	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-2.24*	
26 01 50 51-0031	EA	150 Watt, PAR38, Exterior Incandescent Lamp	34.82	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-2.24*	
26 01 50 51-0032	EA	250 Watt, PAR38, Exterior Incandescent Lamp	73.90	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-2.62*	
26 01 50 51-0033	EA	300 Watt, PAR56, Exterior Incandescent Lamp	85.40	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-2.62*	
26 01 50 51-0034		**Exit Light Lamps** *(26 01 50 51-0001)*		
26 01 50 51-0035	EA	Convert Exit Light Lamps To Red LED Lamps	114.58	
		For Green LED Lamps, Add	*25.00*	
26 01 50 51-0036	EA	Fluorescent Lamp For Exit Light	33.04	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-7.48*	
26 01 50 51-0037	EA	Lamp Replacement For Emergency Lights On Exit Sign	48.83	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-3.74*	
26 01 50 51-0038		**Fluorescent Lamps** *(26 01 50 51-0001)*		
26 01 50 51-0039	EA	18", 15 Watt, T8 Fluorescent Lamp	12.30	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-2.99*	
26 01 50 51-0040	EA	2', 17 Watt, T8 Fluorescent Lamp	15.10	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-2.99*	
26 01 50 51-0041	EA	3', 25 Watt, T8 Fluorescent Lamp	17.39	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-3.37*	
26 01 50 51-0042	EA	4', 32 Watt, T8 Fluorescent Lamp	17.32	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-3.37*	
26 01 50 51-0043	EA	4', 30 Watt, T8 Fluorescent Lamp	22.22	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-3.37*	
26 01 50 51-0044	EA	4', 28 Watt, T8 Fluorescent Lamp	19.28	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-3.37*	
26 01 50 51-0045	EA	4', 25 Watt, T8 Fluorescent Lamp	19.16	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-3.37*	
26 01 50 51-0046	EA	4', 44 Watt, T8HO Fluorescent Lamp	31.82	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-3.37*	
26 01 50 51-0047	EA	8', 59 Watt, T8 Fluorescent Lamp	23.87	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-3.37*	
26 01 50 51-0048	EA	18", 15 Watt, T12 Fluorescent Lamp	19.35	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-2.99*	
26 01 50 51-0049	EA	2', 20 Watt, T12 Fluorescent Lamp	14.30	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-2.99*	
26 01 50 51-0050	EA	3', 30 Watt, T12 Fluorescent Lamp	16.06	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-3.37*	
26 01 50 51-0051	EA	4', 34 Watt, T12 Fluorescent Lamp	16.15	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-3.37*	
26 01 50 51-0052	EA	4', 40 Watt, T12 Fluorescent Lamp	15.78	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-3.37*	
26 01 50 51-0053	EA	8', 60 Watt, T12 Fluorescent Lamp	24.51	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-3.37*	
26 01 50 51-0054	EA	8', 75 Watt, T12 Fluorescent Lamp	20.45	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-3.37*	
26 01 50 51-0055	EA	8', 95 Watt, Instant Start T12 Fluorescent Lamp	36.20	
26 01 50 51-0056	EA	6" Diameter, 20 Watt, Circular T9 Fluorescent Lamp	19.61	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-2.99*	
26 01 50 51-0057	EA	8" Diameter, 22 Watt, Circular T9 Fluorescent Lamp	15.86	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-2.99*	
26 01 50 51-0058	EA	12" Diameter, 32 Watt, Circular T9 Fluorescent Lamp	15.29	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-2.99*	
26 01 50 51-0059	EA	16" Diameter, 40 Watt, Circular T9 Fluorescent Lamp	17.08	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-2.99*	
26 01 50 51-0060	EA	32 Watt, Rapid Start, U-Shaped T8 Fluorescent Lamp	28.84	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-3.74*	
26 01 50 51-0061	EA	40 Watt, Rapid Start, U-Shaped T12 Fluorescent Lamp	27.74	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-3.74*	
26 01 50 51-0062	EA	6", 4 Watt, T5 Fluorescent Lamp	13.82	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-2.99*	
26 01 50 51-0063	EA	9", 6 Watt, T5 Fluorescent Lamp	13.56	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-2.99*	
26 01 50 51-0064	EA	12", 8 Watt, T5 Fluorescent Lamp	14.05	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-2.99*	
26 01 50 51-0065	EA	21", 13 Watt, T5 Fluorescent Lamp	14.76	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-2.99*	
26 01 50 51-0066	EA	24", 14 Watt, T5 Fluorescent Lamp	17.24	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-2.99*	
26 01 50 51-0067	EA	34", 21 Watt, T5 Fluorescent Lamp	18.70	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-3.37*	
26 01 50 51-0068	EA	46", 28 Watt, T5 Fluorescent Lamp	18.06	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-3.37*	
26 01 50 51-0069	EA	46", 54 Watt, T5HO Fluorescent Lamp	19.92	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-3.37*	
26 01 50 51-0070	EA	46", 54 Watt T5 Fluorescent Lamp	18.39	
26 01 50 51-0071	EA	5-13 Watt, 2-Pin Compact Fluorescent Lamp	11.18	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-1.87*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 50 51-0072	EA	9-26 Watt, 4-Pin Compact Fluorescent Lamp	12.47	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-1.87*	
26 01 50 51-0073	EA	27-55 Watt, 4-Pin Compact Fluorescent Lamp	26.65	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-1.87*	
26 01 50 51-0074	EA	Compact Fluorescent 13 Watt, 4-Pin Lamps CF13DD/E/827, Dulux	34.46	
26 01 50 51-0075	EA	Compact Fluorescent 18 Watt, 4-Pin Lamps CF18DD/E/827, Dulux	34.46	
26 01 50 51-0076	EA	32 Watt 2D (DoubleD) Fluorescent Lamp, 4-Pin	66.91	
26 01 50 51-0077	EA	26 Watt (1,600 Lumens) 4-pin Quad Tube PL Lamp	23.65	
26 01 50 51-0078	EA	<9 Watt, Screw-In, Spiral Compact Fluorescent Lamps	11.68	
26 01 50 51-0079	EA	9 To 27 Watt, Screw-In, Spiral Compact Fluorescent Lamps	9.94	
26 01 50 51-0080	EA	29 To 32 Watt, Screw-In, Spiral Compact Fluorescent Lamps	10.48	
26 01 50 51-0081	EA	33 To 42 Watt, Screw-In, Spiral Compact Fluorescent Lamps	46.40	
26 01 50 51-0082	EA	43 To 65 Watt, Screw-In, Spiral Compact Fluorescent Lamps	50.71	
26 01 50 51-0083	EA	85 Watt, Screw-In, Spiral Compact Fluorescent Lamps	97.51	
26 01 50 51-0084	EA	105 Watt, Screw-In, Spiral Compact Fluorescent Lamps	117.01	
26 01 50 51-0085	EA	200 Watt, Screw-In, Spiral Compact Fluorescent Lamps	120.98	
26 01 50 51-0086	EA	11 Watt, Screw-In, Compact Fluorescent Reflector Lamps	43.01	
26 01 50 51-0087	EA	15 Watt, Screw-In, Compact Fluorescent Reflector Lamps	44.91	
26 01 50 51-0088	EA	20 To 28 Watt, Screw-In, Compact Fluorescent Reflector Lamps	52.06	

26 01 50 51-0089 Metal Halide Lamps *(26 01 50 51-0001)*

26 01 50 51-0090	EA	50 Watt, Pulse Start Metal Halide Lamp	49.93	
26 01 50 51-0091	EA	70 Watt, Pulse Start Metal Halide Lamp	47.63	
26 01 50 51-0092	EA	100 Watt, Pulse Start Metal Halide Lamp	54.88	
26 01 50 51-0093	EA	150 Watt, Pulse Start Metal Halide Lamp	53.24	
26 01 50 51-0094	EA	175 Watt, Pulse Start Metal Halide Lamp	52.76	
26 01 50 51-0095	EA	250 Watt, Pulse Start Metal Halide Lamp	53.09	
26 01 50 51-0096	EA	400 Watt, Pulse Start Metal Halide Lamp	64.64	
26 01 50 51-0097	EA	1,000 Watt, Pulse Start Metal Halide Lamp	75.71	
26 01 50 51-0098	EA	1,500 Watt, Pulse Start Metal Halide Lamp	75.26	

26 01 50 51-0099 High Pressure Sodium Lamps *(26 01 50 51-0001)*

26 01 50 51-0100	EA	35 Watt, High Pressure Sodium Lamp	40.59	
		For Enclosed And Gasket Light Fixtures, Add	*2.88*	
26 01 50 51-0101	EA	50 Watt, High Pressure Sodium Lamp	40.59	
		For Enclosed And Gasket Light Fixtures, Add	*2.88*	
26 01 50 51-0102	EA	70 Watt, High Pressure Sodium Lamp	41.57	
		For Enclosed And Gasket Light Fixtures, Add	*2.88*	
26 01 50 51-0103	EA	100 Watt, High Pressure Sodium Lamp	43.46	
		For Enclosed And Gasket Light Fixtures, Add	*2.88*	
26 01 50 51-0104	EA	150 Watt, High Pressure Sodium Lamp	41.57	
		For Enclosed And Gasket Light Fixtures, Add	*2.88*	
26 01 50 51-0105	EA	250 Watt, High Pressure Sodium Lamp	41.57	
		For Enclosed And Gasket Light Fixtures, Add	*2.88*	
26 01 50 51-0106	EA	400 Watt, High Pressure Sodium Lamp	38.77	
		For Enclosed And Gasket Light Fixtures, Add	*2.88*	
26 01 50 51-0107	EA	1,000 Watt, High Pressure Sodium Lamp	93.89	

26 01 50 51-0108 Low Pressure Sodium Lamps *(26 01 50 51-0001)*

26 01 50 51-0109	EA	35 Watt, Low Pressure Sodium Lamp	108.63	
26 01 50 51-0110	EA	55 Watt, Low Pressure Sodium Lamp	121.62	
26 01 50 51-0111	EA	70 Watt, Low Pressure Sodium Lamp	124.55	
26 01 50 51-0112	EA	90 Watt, Low Pressure Sodium Lamp	127.47	
26 01 50 51-0113	EA	135 Watt, Low Pressure Sodium Lamp	139.18	
26 01 50 51-0114	EA	180 Watt, Low Pressure Sodium Lamp	191.86	

26 01 50 51-0115 LED Lamps *(26 01 50 51-0001)*

26 01 50 51-0116 LED Lamps, Candelabra Base, CA10 *(26 01 50 51-0115)*

26 01 50 51-0117	EA	3 Watt (25 Watt Incandescent Equivalent), Candelabra Base, CA10, Dimmable LED Lamp (Energy Star)	25.84	

26 01 50 51-0118 LED Lamps, Medium Base, A19 Or A21 *(26 01 50 51-0115)*

26 01 50 51-0119	EA	6 Watt (40 Watt Incandescent Equivalent), Medium Base, A19, Dimmable LED Lamp (Energy Star)	37.21	
26 01 50 51-0120	EA	11 Watt (60 Watt Incandescent Equivalent), Medium Base, A19, Dimmable LED Lamp (Energy Star)	37.21	
26 01 50 51-0121	EA	14 Watt (75 Watt Incandescent Equivalent), Medium Base, A19, Dimmable LED Lamp (Energy Star)	67.74	
26 01 50 51-0122	EA	17 Watt (75 Watt Incandescent Equivalent), Medium Base, A21, Dimmable LED Lamp (Energy Star)	44.92	
26 01 50 51-0123	EA	18 Watt (100 Watt Incandescent Equivalent), Medium Base, A21, Dimmable LED Lamp (Energy Star)	86.82	

26 01 50 51-0124 LED Lamps, Medium Base, BR30 Or BR40 *(26 01 50 51-0115)*

26 01 50 51-0125	EA	9.5 Watt (65 Watt Incandescent Equivalent), Medium Base, BR30, Dimmable LED Lamp (Energy Star)	49.05	
26 01 50 51-0126	EA	14 Watt (85 Watt Incandescent Equivalent), Medium Base, BR30, Dimmable LED Lamp (Energy Star)	42.60	
26 01 50 51-0127	EA	11 Watt (65 Watt Incandescent Equivalent), Medium Base, BR40, Dimmable LED Lamp (Energy Star)	59.73	
26 01 50 51-0128	EA	14.5 Watt (75 Watt Incandescent Equivalent), Medium Base, BR40, Dimmable LED Lamp (Energy Star)	48.32	
26 01 50 51-0129	EA	14 Watt (85 Watt Incandescent Equivalent), Medium Base, BR40, Dimmable LED Lamp (Energy Star)	67.36	
26 01 50 51-0130	EA	18 Watt (90 Watt Incandescent Equivalent), Medium Base, BR40, Dimmable LED Lamp (Energy Star)	48.32	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 50 51-0131		**LED Lamps, Medium Base, PAR** *(26 01 50 51-0115)*		
26 01 50 51-0132	EA	7 Watt (45 Watt Halogen Equivalent), Medium Base, PAR20, Dimmable LED Lamp (Energy Star)	55.15	
26 01 50 51-0133	EA	12 Watt (60 Watt Halogen Equivalent), Medium Base, Short Neck Par30, Dimmable LED Lamp (Energy Star)	78.85	
26 01 50 51-0134	EA	16.3 Watt (65 Watt Halogen Equivalent), Medium Base, Short Neck PAR30, Dimmable LED Lamp (Energy Star)	78.85	
26 01 50 51-0135	EA	15.6 Watt (70 Watt Halogen Equivalent), Medium Base, Short Neck PAR30, Dimmable LED Lamp (Energy Star)	75.03	
26 01 50 51-0136	EA	12 Watt (50 Watt Halogen Equivalent), Medium Base, Short Neck PAR30, Dimmable LED Lamp (Energy Star)	71.22	
26 01 50 51-0137	EA	15 Watt (75 Watt Halogen Equivalent), Medium Base, Long Neck PAR30, Dimmable LED Lamp (Energy Star)	71.22	
26 01 50 51-0138	EA	18 Watt (90 Watt Halogen Equivalent), Medium Base, Long Neck PAR30, Dimmable LED Lamp (Energy Star)	148.30	
26 01 50 51-0139	EA	15 Watt (75 Watt Halogen Equivalent), Medium Base, PAR38, Dimmable LED Lamp (Energy Star)	78.85	
26 01 50 51-0140	EA	18 Watt (90 Watt Halogen Equivalent), Medium Base, PAR38, Dimmable LED Lamp (Energy Star)	75.03	
26 01 50 51-0141	EA	19 Watt (120 Watt Halogen Equivalent), Medium Base, Par38, Dimmable LED Lamp (Energy Star)	78.85	
26 01 50 51-0142	EA	24 Watt (120 Watt Halogen Equivalent), Medium Base, PAR38, Dimmable LED Lamp (Energy Star)	78.85	
26 01 50 51-0143		**LED Lamps, GU Base, MR16** *(26 01 50 51-0115)*		
26 01 50 51-0144	EA	4 Watt (20 Watt Halogen Equivalent), GU5.3 Base, MR16, LED Lamp (Energy Star)	34.97	
26 01 50 51-0145	EA	6 Watt (30 Watt Halogen Equivalent), GU10 Base, MR16, Dimmable LED Lamp (Energy Star)	49.05	
26 01 50 51-0146	EA	8 Watt (50 Watt Halogen Equivalent), GU5.3 Base, MR16, Dimmable LED Lamp (Energy Star)	55.15	
26 01 50 51-0147		**LED Lamps, PL Series** *(26 01 50 51-0115)*		
26 01 50 51-0148	EA	3.5 Watt, 2-Pin CFL G23 Base , Hybrid Lamp (GreenCreative PLS 3.5 HYB G23)	17.11	
26 01 50 51-0149	EA	26 Watt, 2700K CCT, PL EDGE DIRect Series (Green Creative 9.5PLH/827/DIR)	22.53	
26 01 50 51-0150	EA	26 Watt, 3000K CCT, PL EDGE DIRect Series (Green Creative 9.5PLH/830/DIR)	19.00	
26 01 50 51-0151	EA	26 Watt, 3500K CCT, PL EDGE DIRect Series (Green Creative 9.5PLH/835/DIR)	21.21	
26 01 50 51-0152	EA	26 Watt, 4000K CCT, PL EDGE DIRect Series (Green Creative 9.5PLH/840/DIR)	21.21	
26 01 50 51-0153	EA	26 Watt, 3000K CCT, High CRI, PL EDGE DIRect Series (Green Creative 10.5PLH/930/DIR)	25.19	
26 01 50 51-0154	EA	13-18 Watt, 2700K CCT, PL EDGE DIRect Series (Green Creative 5.5PLH/827/DIR)	21.21	
26 01 50 51-0155	EA	13-18 Watt, 3000K CCT, PL EDGE DIRect Series (Green Creative 5.5PLH/830/DIR)	21.21	
26 01 50 51-0156	EA	13-18 Watt, 3500K CCT, PL EDGE DIRect Series (Green Creative 5.5PLH/835/DIR)	21.21	
26 01 50 51-0157	EA	13-18 Watt, 4000K CCT, PL EDGE DIRect Series (Green Creative 5.5PLH/840/DIR)	21.21	
26 01 50 51-0158	EA	26 Watt, 2700K CCT, PL EDGE DIRect Series (Green Creative 10PLV/827/DIR)	23.86	
26 01 50 51-0159	EA	26 Watt, 3000K CCT, PL EDGE DIRect Series (Green Creative 10PLV/830/DIR)	23.86	
26 01 50 51-0160	EA	26 Watt, 3500K CCT, PL EDGE DIRect Series (Green Creative 10PLV/835/DIR)	23.86	
26 01 50 51-0161	EA	26 Watt, 4000K CCT, PL EDGE DIRect Series (Green Creative 10PLV/840/DIR)	23.86	
26 01 50 51-0162	EA	26 Watt, 3000K CCT, High CRI, PL EDGE DIRect Series (Green Creative 11PLV/930/DIR)	22.53	
26 01 50 51-0163	EA	13-18 Watt, 2700K CCT, PL EDGE DIRect Series (Green Creative 6.5PLV/827/DIR)	22.53	
26 01 50 51-0164	EA	13-18 Watt, 3000K CCT, PL EDGE DIRect Series (Green Creative 6.5PLV/830/DIR)	22.53	
26 01 50 51-0165	EA	13-18 Watt, 3500K CCT, PL EDGE DIRect Series (Green Creative 6.5PLV/835/DIR)	23.42	
26 01 50 51-0166	EA	13-18 Watt, 4000K CCT, PL EDGE DIRect Series (Green Creative 6.5PLV/840/DIR)	23.42	
26 01 50 51-0167	EA	26 Watt, 2700K CCT, PL EDGE BYPass Series (Green Creative 10.5PLH/827/BYP)	23.61	
26 01 50 51-0168	EA	26 Watt, 3000K CCT, PL EDGE BYPass Series (Green Creative 10.5PLH/830/BYP)	23.61	
26 01 50 51-0169	EA	26 Watt, 3500K CCT, PL EDGE BYPass Series (Green Creative 10.5PLH/835/BYP)	23.61	
26 01 50 51-0170	EA	26 Watt, 4000K CCT, PL EDGE BYPass Series (Green Creative 10.5PLH/840/BYP)	23.61	
26 01 50 51-0171	EA	13-18 Watt, 3500K CCT, PL EDGE BYPass Series (Green Creative 6PLH/835/BYP)	24.30	
26 01 50 51-0172	EA	13-18 Watt, 4000K CCT, PL EDGE BYPass Series (Green Creative 6PLH/840/BYP)	24.30	
26 01 50 51-0173	EA	13 Watt, 3000K CCT, PL EDGE BYPass Series (Green Creative 6PLH/830/BYP/E26)	24.30	
26 01 50 51-0174	EA	13 Watt, 3500K CCT, PL EDGE BYPass Series (Green Creative 6PLH/835/BYP/E26)	24.30	
26 01 50 51-0175	EA	13 Watt, 4000K CCT, PL EDGE BYPass Series (Green Creative 6PLH/840/BYP/E26)	24.30	
26 01 50 51-0176	EA	13 Watt, 3000K CCT, PL EDGE BYPass Series (Green Creative 6PLH/830/BYP/GU24)	24.30	
26 01 50 51-0177	EA	13 Watt, 3500K CCT, PL EDGE BYPass Series (Green Creative 6PLH/835/BYP/GU24)	24.30	
26 01 50 51-0178	EA	13 Watt, 4000K CCT, PL EDGE BYPass Series (Green Creative 6PLH/840/BYP/GU24)	24.30	
26 01 50 51-0179	EA	26 Watt, 2700K CCT, PL EDGE BYPass Series (Green Creative 11.5PLV/827/BYP)	31.21	
26 01 50 51-0180	EA	26 Watt, 3000K CCT, PL EDGE BYPass Series (Green Creative 11.5PLV/830/BYP)	31.21	
26 01 50 51-0181	EA	26 Watt, 3500K CCT, PL EDGE BYPass Series (Green Creative 11.5PLV/835/BYP)	31.21	
26 01 50 51-0182	EA	26 Watt, 4000K CCT, PL EDGE BYPass Series (Green Creative 11.5PLV/840/BYP)	29.62	
26 01 50 51-0183	EA	13-18 Watt, 3500K CCT, PL EDGE BYPass Series (Green Creative 7PLV/835/BYP)	29.62	
26 01 50 51-0184	EA	13-18 Watt, 4000K CCT, PL EDGE BYPass Series (Green Creative 7PLV/840/BYP)	29.62	
26 01 50 51-0185	EA	4 Pin, 6 Watt, 560 Lumens 4000K CCT, Horizontal Mount LED PL Lamp (Green Creative 57898)	26.87	
26 01 50 51-0186		**HID LED Lamps, Medium Base E26** *(26 01 50 51-0115)*		
26 01 50 51-0187	EA	27 Watt, 4000K CCT, Medium Base E26, LED Lamp (Green Creative 27HID/840/277V/E26)	60.12	
26 01 50 51-0188	EA	27 Watt, 5000K CCT, Medium Base E26, LED Lamp (Green Creative 27HID/850/277V/E26)	60.12	
26 01 50 51-0189	EA	45 Watt, 4000K CCT, Medium Base E26, LED Lamp (Green Creative 45HID/840/277V/E26)	76.47	
26 01 50 51-0190	EA	45 Watt, 5000K CCT, Medium Base E26, LED Lamp (Green Creative 45HID/850/277V/E26)	76.47	
26 01 50 51-0191	EA	10 Watt, 3000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED10-3026)	51.68	
26 01 50 51-0192	EA	10 Watt, 4000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED10-4026)	51.68	
26 01 50 51-0193	EA	10 Watt, 5000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED10-5026)	51.68	
26 01 50 51-0194	EA	10 Watt, 6000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED10-6026)	51.68	
26 01 50 51-0195	EA	15 Watt, 3000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED15-3026)	53.45	
26 01 50 51-0196	EA	15 Watt, 4000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED15-4026)	53.45	
26 01 50 51-0197	EA	15 Watt, 5000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED15-5026)	53.45	
26 01 50 51-0198	EA	15 Watt, 6000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED15-6026)	53.45	
26 01 50 51-0199	EA	20 Watt, 3000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED20-3026)	60.53	
26 01 50 51-0200	EA	20 Watt, 4000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED20-4026)	60.53	
26 01 50 51-0201	EA	20 Watt, 5000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED20-5026)	60.53	
26 01 50 51-0202	EA	20 Watt, 6000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED20-6026)	60.53	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 50 51-0203	EA	25 Watt, 3000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED25-3026)	69.37	
26 01 50 51-0204	EA	25 Watt, 4000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED25-4026)	69.37	
26 01 50 51-0205	EA	25 Watt, 5000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED25-5026)	69.37	
26 01 50 51-0206	EA	25 Watt, 6000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED25-6026)	69.37	
26 01 50 51-0207	EA	30 Watt, 3000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED30-3026)	88.82	
26 01 50 51-0208	EA	30 Watt, 4000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED30-4026)	88.82	
26 01 50 51-0209	EA	30 Watt, 5000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED30-5026)	88.82	
26 01 50 51-0210	EA	30 Watt, 6000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED30-6026)	88.82	
26 01 50 51-0211	EA	40 Watt, 3000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED40-3026)	105.63	
26 01 50 51-0212	EA	40 Watt, 4000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED40-4026)	105.63	
26 01 50 51-0213	EA	40 Watt, 5000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED40-5026)	105.63	
26 01 50 51-0214	EA	40 Watt, 6000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED40-6026)	105.63	
26 01 50 51-0215	EA	60 Watt, 3000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED60-3026)	117.12	
26 01 50 51-0216	EA	60 Watt, 4000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED60-4026)	117.12	
26 01 50 51-0217	EA	60 Watt, 5000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED60-5026)	117.12	
26 01 50 51-0218	EA	60 Watt, 6000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED60-6026)	117.12	
26 01 50 51-0219	EA	80 Watt, 3000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED80-3026)	158.68	
26 01 50 51-0220	EA	80 Watt, 4000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED80-4026)	158.68	
26 01 50 51-0221	EA	80 Watt, 5000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED80-5026)	158.68	
26 01 50 51-0222	EA	80 Watt, 6000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED80-6026)	158.68	
26 01 50 51-0223	EA	100 Watt, 3000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED100-3026)	163.99	
26 01 50 51-0224	EA	100 Watt, 4000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED100-4026)	163.99	
26 01 50 51-0225	EA	100 Watt, 5000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED100-5026)	163.99	
26 01 50 51-0226	EA	100 Watt, 6000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED100-6026)	163.99	
26 01 50 51-0227	EA	120 Watt, 3000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED120-3026)	194.94	
26 01 50 51-0228	EA	120 Watt, 4000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED120-4026)	194.94	
26 01 50 51-0229	EA	120 Watt, 5000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED120-5026)	194.94	
26 01 50 51-0230	EA	120 Watt, 6000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED120-6026)	194.94	
26 01 50 51-0231	EA	150 Watt, 3000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED150-3026)	232.08	
26 01 50 51-0232	EA	150 Watt, 4000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED150-4026)	232.08	
26 01 50 51-0233	EA	150 Watt, 5000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED150-5026)	232.08	
26 01 50 51-0234	EA	150 Watt, 6000K CCT, Medium Base E26, LED Omnidirectional Street Lamp (Bergen industries LED150-6026)	232.08	
26 01 50 51-0235	EA	20 Watt, 4000K CCT, Medium Base E26, LED Post Top Lamp (EiKO industries LED20WPT40KMED-G6)	74.68	
26 01 50 51-0236	EA	20 Watt, 5000K CCT, Medium Base E26, LED Post Top Lamp (EiKO industries LED20WPT50KMED-G6)	80.87	
26 01 50 51-0237	EA	27 Watt, 4000K CCT, Medium Base E26, LED Post Top Lamp (EiKO industries LED27WPT40KMED-G5)	80.87	
26 01 50 51-0238	EA	27 Watt, 5000K CCT, Medium Base E26, LED Post Top Lamp (EiKO industries LED27WPT50KMED-G5)	74.68	
26 01 50 51-0239	EA	36 Watt, 4000K CCT, Medium Base E26, LED Post Top Lamp (EiKO industries LED36WPT40KMED-G5)	94.13	
26 01 50 51-0240	EA	36 Watt, 5000K CCT, Medium Base E26, LED Post Top Lamp (EiKO industries LED36WPT50KMED-G5)	86.18	
26 01 50 51-0241	EA	45 Watt, 4000K CCT, Medium Base E26, LED Post Top Lamp (EiKO industries LED45WPT40KMED-G5)	103.86	
26 01 50 51-0242	EA	45 Watt, 5000K CCT, Medium Base E26, LED Post Top Lamp (EiKO industries LED45WPT50KMED-G5)	102.82	
26 01 50 51-0243	EA	54 Watt, 4000K CCT, Medium Base E26, LED Post Top Lamp (EiKO industries LED54WPT40KMED-G5)	105.19	
26 01 50 51-0244	EA	54 Watt, 5000K CCT, Medium Base E26, LED Post Top Lamp (EiKO industries LED54WPT50KMED-G5)	105.19	
26 01 50 51-0245	EA	27 Watt, 4000K CCT, Medium Base E26, LED Lamp (EiKO industries LED27WPT40KMED-G7)	63.21	
26 01 50 51-0246	EA	27 Watt, 5000K CCT, Medium Base E26, LED Lamp (EiKO industries LED27WPT50KMED-G7)	63.21	
26 01 50 51-0247	EA	36 Watt, 4000K CCT, Medium Base E26, LED Lamp (EiKO industries LED36WPT40KMED-G7)	71.39	
26 01 50 51-0248	EA	36 Watt, 5000K CCT, Medium Base E26, LED Lamp (EiKO industries LED36WPT50KMED-G7)	71.39	
26 01 50 51-0249	EA	45 Watt, 4000K CCT, Medium Base E26, LED Lamp (EiKO industries LED45WPT40KMED-G7)	76.83	
26 01 50 51-0250	EA	45 Watt, 5000K CCT, Medium Base E26, LED Lamp (EiKO industries LED45WPT50KMED-G7)	76.83	
26 01 50 51-0251	EA	54 Watt, 4000K CCT, Medium Base E26, LED Lamp (EiKO industries LED54WPT40KMED-G7)	85.00	
26 01 50 51-0252	EA	54 Watt, 5000K CCT, Medium Base E26, LED Lamp (EiKO industries LED54WPT50KMED-G7)	85.00	
26 01 50 51-0253	EA	20 Watt, 5500K CCT, Medium Base E26, LED Lamp (Olympic CL-20W8-55K-E26)	85.42	
26 01 50 51-0254	EA	30 Watt, 5500K CCT, Medium Base E26, LED Lamp (Olympic CL-30W8-55K-E26)	92.68	
26 01 50 51-0255	EA	40 Watt, 5500K CCT, Medium Base E26, LED Lamp (Olympic CL-40W8-55K-E26)	115.58	
26 01 50 51-0256	EA	50 Watt, 5500K CCT, Medium Base E26, LED Lamp (Olympic CL-50W8-55K-E26)	127.43	
26 01 50 51-0257	EA	10 Watt, 5500K CCT, Medium Base E26, Compact LED Lamp (Olympic CCL-10W12-55K-E26)	49.34	
26 01 50 51-0258	EA	15 Watt, 5500K CCT, Medium Base E26, Compact LED Lamp (Olympic CCL-15W12-55K-E26)	55.71	
26 01 50 51-0259	EA	20 Watt, 5500K CCT, Medium Base E26, Compact LED Lamp (Olympic CCL-20W12-55K-E26)	58.89	
26 01 50 51-0260	EA	25 Watt, 5500K CCT, Medium Base E26, Compact LED Lamp (Olympic CCL-25W12-55K-E26)	64.82	
26 01 50 51-0261	EA	15 Watt, Medium Base E26, LED Self-Ballasted Retrofit Lamp (Neptun LED-N148015-UNV)	78.19	
26 01 50 51-0262	EA	20 Watt, Medium Base E26, LED Self-Ballasted Retrofit Lamp (Neptun LED-N148020-UNV)	91.80	
26 01 50 51-0263	EA	25 Watt, Medium Base E26, LED Self-Ballasted Retrofit Lamp (Neptun LED-N148025-UNV)	125.81	
26 01 50 51-0264	EA	30 Watt, Medium Base E26, LED Self-Ballasted Retrofit Lamp (Neptun LED-N148030-UNV)	132.61	
26 01 50 51-0265	EA	35 Watt, Medium Base E26, LED Self-Ballasted Retrofit Lamp (Neptun LED-N148035-UNV)	143.50	
26 01 50 51-0266	EA	40 Watt, Medium Base E26, LED Self-Ballasted Retrofit Lamp (Neptun LED-N148040-UNV)	150.30	
26 01 50 51-0267	EA	60 Watt, Medium Base E26, LED Self-Ballasted Retrofit Lamp (Neptun LED-N148060-UNV)	216.96	
26 01 50 51-0268	EA	20 Watt, 5000K CCT, 120-277 Volt, E26 (Medium) Base, LED Retrofit Omni-Directional Lamp (HYLITE HL-IOD-20W-E26-50K)	66.05	

26 01 50 51-0269 HID LED Lamps, Mogul Base E39 Or EX39 *(26 01 50 51-0115)*

26 01 50 51-0270	EA	120 Watt, 2700K CCT, Mogul Base EX39, HID LED Lamp (Green Creative 120HID/827/277V/EX39)	207.00	
26 01 50 51-0271	EA	120 Watt, 5000K CCT, Mogul Base EX39, HID LED Lamp (Green Creative 120HID/850/277V/EX39)	207.00	
26 01 50 51-0272	EA	120 Watt, 5700 CCT, Mogul Base EX39, HID LED Lamp (Green Creative 120HID/857/277V/EX39)	207.00	
26 01 50 51-0273	EA	27 Watt, 3000K CCT, Mogul Base E39, LED Lamp (Green Creative 27HID/830/277V/EX39)	60.12	
26 01 50 51-0274	EA	27 Watt, 4000K CCT, Mogul Base E39, LED Lamp (Green Creative 27HID/840/277V/EX39/R)	60.12	
26 01 50 51-0275	EA	27 Watt, 5000K CCT, Mogul Base E39, LED Lamp (Green Creative 27HID/850/277V/EX39)	60.12	
26 01 50 51-0276	EA	45 Watt, 3000K CCT, Mogul Base E39, LED Lamp (Green Creative 45HID/830/277V/EX39)	76.47	
26 01 50 51-0277	EA	45 Watt, 4000K CCT, Mogul Base E39, LED Lamp (Green Creative 45HID/840/277V/EX39/R)	76.47	
26 01 50 51-0278	EA	45 Watt, 5000K CCT, Mogul Base E39, LED Lamp (Green Creative 45HID/850/277V/EX39)	76.47	
26 01 50 51-0279	EA	80 Watt, 5000K CCT, Mogul Base E39, LED Lamp (Green Creative 80HID/850/277V/EX39)	142.80	
26 01 50 51-0280	EA	80 Watt, 3000K CCT, Mogul Base E39, LED Omnidirectional Street Lamp (Bergen industries LED80-3039)	158.68	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 50 51-0281	EA	80 Watt, 4000K CCT, Mogul Base E39, LED Omnidirectional Street Lamp (Bergen industries LED80-4039)	158.68	
26 01 50 51-0282	EA	80 Watt, 5000K CCT, Mogul Base E39, LED Omnidirectional Street Lamp (Bergen industries LED80-5039)	158.68	
26 01 50 51-0283	EA	80 Watt, 6000K CCT, Mogul Base E39, LED Omnidirectional Street Lamp (Bergen industries LED80-6039)	158.68	
26 01 50 51-0284	EA	100 Watt, 3000K CCT, Mogul Base E39, LED Omnidirectional Street Lamp (Bergen industries LED100-3039)	163.99	
26 01 50 51-0285	EA	100 Watt, 4000K CCT, Mogul Base E39, LED Omnidirectional Street Lamp (Bergen industries LED100-4039)	163.99	
26 01 50 51-0286	EA	100 Watt, 5000K CCT, Mogul Base E39, LED Omnidirectional Street Lamp (Bergen industries LED100-5039)	163.99	
26 01 50 51-0287	EA	100 Watt, 6000K CCT, Mogul Base E39, LED Omnidirectional Street Lamp (Bergen industries LED100-6039)	163.99	
26 01 50 51-0288	EA	120 Watt, 3000K CCT, Mogul Base E39, LED Omnidirectional Street Lamp (Bergen industries LED120-3039)	194.94	
26 01 50 51-0289	EA	120 Watt, 4000K CCT, Mogul Base E39, LED Omnidirectional Street Lamp (Bergen industries LED120-4039)	194.94	
26 01 50 51-0290	EA	120 Watt, 5000K CCT, Mogul Base E39, LED Omnidirectional Street Lamp (Bergen industries LED120-5039)	194.94	
26 01 50 51-0291	EA	120 Watt, 6000K CCT, Mogul Base E39, LED Omnidirectional Street Lamp (Bergen industries LED120-6039)	194.94	
26 01 50 51-0292	EA	150 Watt, 3000K CCT, Mogul Base E39, LED Omnidirectional Street Lamp (Bergen industries LED150-3039)	232.08	
26 01 50 51-0293	EA	150 Watt, 4000K CCT, Mogul Base E39, LED Omnidirectional Street Lamp (Bergen industries LED150-4039)	232.08	
26 01 50 51-0294	EA	150 Watt, 5000K CCT, Mogul Base E39, LED Omnidirectional Street Lamp (Bergen industries LED150-5039)	232.08	
26 01 50 51-0295	EA	150 Watt, 6000K CCT, Mogul Base E39, LED Omnidirectional Street Lamp (Bergen industries LED150-6039)	232.08	
26 01 50 51-0296	EA	27 Watt, 4000K CCT, Mogul Base E39, LED Post Top Lamp (EiKO industries LED27WPT40KMOG-G5)	80.87	
26 01 50 51-0297	EA	27 Watt, 5000K CCT, Mogul Base E39, LED Post Top Lamp (EiKO industries LED27WPT50KMOG-G5)	80.87	
26 01 50 51-0298	EA	36 Watt, 4000K CCT, Mogul Base E39, LED Post Top Lamp (EiKO industries LED36WPT40KMOG-G5)	94.13	
26 01 50 51-0299	EA	36 Watt, 5000K CCT, Mogul Base E39, LED Post Top Lamp (EiKO industries LED36WPT50KMOG-G5)	92.91	
26 01 50 51-0300	EA	45 Watt, 4000K CCT, Mogul Base E39, LED Post Top Lamp (EiKO industries LED45WPT40KMOG-G5)	103.86	
26 01 50 51-0301	EA	45 Watt, 5000K CCT, Mogul Base E39, LED Post Top Lamp (EiKO industries LED45WPT50KMOG-G5)	102.82	
26 01 50 51-0302	EA	54 Watt, 4000K CCT, Mogul Base E39, LED Post Top Lamp (EiKO industries LED54WPT40KMOG-G5)	105.19	
26 01 50 51-0303	EA	54 Watt, 5000K CCT, Mogul Base E39, LED Post Top Lamp (EiKO industries LED54WPT50KMOG-G5)	102.11	
26 01 50 51-0304	EA	100 Watt, 4000K CCT, Mogul Base E39, LED Post Top Lamp (EiKO industries LED100WPT40KMOG-G5)	222.36	
26 01 50 51-0305	EA	20 Watt, 4000K CCT, Mogul Base E39, Horizontal LED Lamp (EiKO industries LED20WPT/180/40KMOG-G7)	80.84	
26 01 50 51-0306	EA	20 Watt, 5000K CCT, Mogul Base E39, Horizontal LED Lamp (EiKO industries LED20WPT/180/50KMOG-G7)	80.84	
26 01 50 51-0307	EA	30 Watt, 4000K CCT, Mogul Base E39, Horizontal LED Lamp (EiKO industries LED30WPT/180/40KMOG-G7)	91.84	
26 01 50 51-0308	EA	30 Watt, 5000K CCT, Mogul Base E39, Horizontal LED Lamp (EiKO industries LED30WPT/180/50KMOG-G7)	91.84	
26 01 50 51-0309	EA	40 Watt, 4000K CCT, Mogul Base E39, Horizontal LED Lamp (EiKO industries LED40WPT/180/40KMOG-G7)	98.46	
26 01 50 51-0310	EA	40 Watt, 5000K CCT, Mogul Base E39, Horizontal LED Lamp (EiKO industries LED40WPT/180/50KMOG-G7)	98.46	
26 01 50 51-0311	EA	27 Watt, 4000K CCT, Mogul Base E39, LED Lamp (EiKO industries LED27WPT40KMOG-G7)	63.10	
26 01 50 51-0312	EA	27 Watt, 5000K CCT, Mogul Base E39, LED Lamp (EiKO industries LED27WPT50KMOG-G7)	63.10	
26 01 50 51-0313	EA	36 Watt, 4000K CCT, Mogul Base E39, LED Lamp (EiKO industries LED36WPT40KMOG-G7)	71.39	
26 01 50 51-0314	EA	36 Watt, 5000K CCT, Mogul Base E39, LED Lamp (EiKO industries LED36WPT50KMOG-G7)	71.39	
26 01 50 51-0315	EA	45 Watt, 4000K CCT, Mogul Base E39, LED Lamp (EiKO industries LED45WPT40KMOG-G7)	76.83	
26 01 50 51-0316	EA	45 Watt, 5000K CCT, Mogul Base E39, LED Lamp (EiKO industries LED45WPT50KMOG-G7)	76.83	
26 01 50 51-0317	EA	54 Watt, 4000K CCT, Mogul Base E39, LED Lamp (EiKO industries LED54WPT40KMOG-G7)	85.00	
26 01 50 51-0318	EA	54 Watt, 5000K CCT, Mogul Base E39, LED Lamp (EiKO industries LED54WPT50KMOG-G7)	85.00	
26 01 50 51-0319	EA	65 Watt, 5500K CCT, Mogul Base E39, LED Lamp (Olympic CL-65W8-55K-E39)	153.87	
26 01 50 51-0320	EA	80 Watt, 5500K CCT, Mogul Base E39, LED Lamp (Olympic CL-80W8-55K-E39)	178.10	
26 01 50 51-0321	EA	100 Watt, 5500K CCT, Mogul Base E39, LED Lamp (Olympic CL-100W8-55K-E39)	212.59	
26 01 50 51-0322	EA	120 Watt, 5500K CCT, Mogul Base E39, LED Lamp (Olympic CL-120W8-55K-E39)	415.67	
26 01 50 51-0323	EA	150 Watt, 5500K CCT, Mogul Base E39, LED Lamp (Olympic CL-150W8-55K-E39)	392.48	
26 01 50 51-0324	EA	200 Watt, 5500K CCT, Mogul Base E39, LED Lamp (Olympic CL-200W8-55K-E39)	415.67	
26 01 50 51-0325	EA	250 Watt, 5500K CCT, Mogul Base E39, LED Lamp (Olympic CL-250W8-55K-E39)	417.48	
26 01 50 51-0326	EA	24 Watt, 3000K CCT, Mogul Base E39, LED Lamp (Light Efficient Design LED-8029M30-A)	62.70	
26 01 50 51-0327	EA	24 Watt, 4000K CCT, Mogul Base E39, LED Lamp (Light Efficient Design LED-8029M40-A)	62.70	
26 01 50 51-0328	EA	24 Watt, 5700K CCT, Mogul Base E39, LED Lamp (Light Efficient Design LED-8029M57-A)	62.70	
26 01 50 51-0329	EA	100 Watt, Mogul Base E39, LED Area Lamp (MaxLite AR100LED50)	186.01	
26 01 50 51-0330	EA	115 Watt, 4000K CCT, Mogul Base EX39, HID LED Lamp (Keystone KT-LED115HID-V-EX39-840-D)	431.45	
26 01 50 51-0331	EA	40 Watt, 120-277 Volt, 5000K CCT, E39 Base, LED Arc-Cob Lamp (HYLITE HL-AC-40W-E39-50K)	178.00	
26 01 50 51-0332	EA	100 Watt, 480 Volt, 5000K CCT, E39 Base, LED Omni-Cob Lamp (HYLITE HL-OC-100W-E39-50K)	210.00	
26 01 50 51-0333	EA	45 Watt, 120-277 Volt, 5000K CCT, E39 Base, LED Omni-Cob Lamp (HYLITE HL-OC-45W-E39-50K)	91.64	
26 01 50 51-0334	EA	40 Watt, 5680 Lumens, Mogul Base E39, LED Directional Flood Lamp (HYLITE HL-IDL-40W-E39-50K)	299.52	

26 01 50 51-0335 LED Lamps, 2G11 Base *(26 01 50 51-0115)*

26 01 50 51-0336	EA	19 Watt, 1550 Lumens, 3500K CCT, 2G11 Base, Dimmable LED Lamp (Green Creative 14.5PLL/835/DIR)	49.85	

26 01 50 51-0337 LED Lamps, GX23 Or G23 Base *(26 01 50 51-0115)*

26 01 50 51-0338	EA	5 Watt, 580 Lumens, 2 Pin GX23 Base, Dimmable LED Lamp (Lunera HN-H-GX23-U-5W-840-G4)	24.02	

26 01 50 51-0339 LED Lamps, G24 Base *(26 01 50 51-0115)*

26 01 50 51-0340	EA	5.5 Watt, 500 Lumens, G24 Base, LED Lamp (Green Creative 5.5PLH/835/DIR/R)	31.51	

26 01 50 51-0341 LED Tubes (Fluorescent Lamp Replacement) *(26 01 50 51-0115)*

26 01 50 51-0342	EA	2', 1,250 Lumens, 4000K CCT, LED Tube (T8 Fluorescent Lamp Replacement) (Remphos RPT-TOTALTUBEG2-T8-24IN-4000K)	43.26	
		For Removal Of Multiple Lamps In A Fixture, Deduct		*-2.99*
26 01 50 51-0343	EA	2', 1,900 Lumens, 4000K CCT, LED Tube (T8 Fluorescent Lamp Replacement) (Remphos RPT-TOTALTUBEG2-T8-24INU-4000K)	56.72	
		For Removal Of Multiple Lamps In A Fixture, Deduct		*-2.99*
26 01 50 51-0344	EA	3', 1,900 Lumens, 4000K CCT, LED Tube (T8 Fluorescent Lamp Replacement) (Remphos RPT-TOTALTUBEG2-T8-36IN-4000K)	46.64	
		For Removal Of Multiple Lamps In A Fixture, Deduct		*-3.18*
26 01 50 51-0345	EA	4', 1,900 Lumens, 4000K CCT, LED Tube (T8 Fluorescent Lamp Replacement) (Remphos RPT-TOTALTUBEG2-T8-48IN-4000K)	51.13	
		For Removal Of Multiple Lamps In A Fixture, Deduct		*-3.37*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 50 51-0346	EA	4', 2,200 Lumens, 4000K CCT, LED Tube (T8 Fluorescent Lamp Replacement) (Remphos RPT-TOTALTUBEG2HO-T8-48IN-4000K)	56.18	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-3.37*	
26 01 50 51-0347	EA	4', 2,539 Lumens, LED Tube (T8 Fluorescent Lamp Replacement) (Carson Technology CT-D02018TBN)	34.71	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-3.37*	
26 01 50 51-0348	EA	2', 1,348 Lumens, LED Tube (T8 Fluorescent Lamp Replacement) (Carson Technology CT-D02010TBN)	33.57	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-2.99*	
26 01 50 51-0349	EA	2', 1,100 Lumens, LED Tube (T8 Fluorescent Lamp Replacement) (Sylvania LED9T8/L24/FG/835/BF)	30.45	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-2.99*	
26 01 50 51-0350	EA	3', 1,650 Lumens, LED Tube (T8 Fluorescent Lamp Replacement) (Sylvania LED12T8/L36/FG/835/BF)	30.93	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-3.18*	
26 01 50 51-0351	EA	4', 1,700 Lumens, LED Tube (T8 Fluorescent Lamp Replacement) (Sylvania LED14T8/L48/FG/835/BF)	30.83	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-3.37*	
26 01 50 51-0352	EA	4', 2,100 Lumens, LED Tube (T8 Fluorescent Lamp Replacement) (Sylvania LED17T8/L48/FG/835/BF)	32.02	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-3.37*	

26 01 50 51-0353 Filament LED Lamps *(26 01 50 51-0115)*

26 01 50 51-0354	EA	7.5 Watt, 2700K CCT, Clear A19 Filament LED Lamp (Green Creative 7.5FA19DIM/827)	19.17	
26 01 50 51-0355	EA	4.5 Watt, 2700K CCT, Clear A19 Filament LED Lamp (Green Creative 4.5A19DIM/827/R)	19.17	
26 01 50 51-0356	EA	4.5 Watt, 2700K CCT, Clear A19 Filament LED Lamp (Green Creative 4.5FA19DIM/827)	18.29	
26 01 50 51-0357	EA	4.5 Watt, 2400 CCT, Amber A19 Filament LED Lamp (Green Creative 4.5FA19DIM/824/A)	18.29	
26 01 50 51-0358	EA	4.5 Watt, 2700K CCT, Clear G25 Globe Filament LED Lamp (Green Creative 4.5FG25DIM/827)	19.70	
26 01 50 51-0359	EA	4.5 Watt, 2400 CCT, Amber G25 Globe Filament LED Lamp (Green Creative 4.5FG25DIM/824/A)	19.70	
26 01 50 51-0360	EA	3.5 Watt, 2700K CCT, Clear B10 Candle Filament LED Lamp (Green Creative 3.5FB10DIM/827)	16.52	
26 01 50 51-0361	EA	3.5 Watt, 2700K CCT, Clear B11 Candle Filament LED Lamp (Green Creative 3.5FB11DIM/827/E26)	16.52	
26 01 50 51-0362	EA	3.5 Watt, 2400 CCT, Amber B10 Candle Filament LED Lamp (Green Creative 3.5FBA10DIM/824/FT/A)	17.05	
26 01 50 51-0363	EA	3.5 Watt, 2400 CCT, Amber ST19 Filament LED Lamp (Green Creative 5FST19DIM/824/A)	20.94	
26 01 50 51-0364	EA	4.5 Watt, 120 Volt 450 Lumens ULTRA LED Filament Lamp (Sylvania 79521)	23.25	

26 01 50 51-0365 Other Lamps *(26 01 50 51-0115)*

26 01 50 51-0366	EA	8 Watt, Medium Base, A19, A-Shape Dimmable LED Lamp (Philips 8A19/END/2700 DIM 6/1)	18.15	
26 01 50 51-0367	EA	8 Watt, Medium Base, A19, A-Shape Dimmable LED Lamp (Philips 7A19/2700 DIM)	18.15	
26 01 50 51-0368	EA	11 Watt, Medium Base, A19, A-Shape Dimmable LED Lamp (Philips 11A19/2700 DIM)	18.15	
26 01 50 51-0369	EA	12 Watt, Medium Base, Dimmable BR40 LED Lamp (Philips 12BR40/F90 2700 DIM AF 6/1)	19.03	
26 01 50 51-0370	EA	13 Watt, Medium Base, Dimmable PAR38 LED Single Optic Lamp (Philips 13PAR38/S15 4000 DIM AF SO 6/1)	19.03	
26 01 50 51-0371	EA	8 Watt, Medium Base, Dimmable PAR20 LED Lamp (Philips 8PAR20/END/F36 3000 DIM 6/1)	19.03	

26 01 50 51-0372 LED Lamps, Light Engines, Round, LER Series *(26 01 50 51-0115)*

26 01 50 51-0373	EA	5.5" Diameter, 17 Watt, 3000K CCT, Round LED Light Engine (Maxlite LER5.5A1730)	55.84	
26 01 50 51-0374	EA	9 Watt, 120 Volt, 800 Lumens, 2700K, Omnidirectional Ultra LED A-line Lamp (Sylvania LED9A19/DIM/O/827/U)	30.93	

26 01 50 51-0375 Remove Hazardous Lamps From Fixture For Recycling *(26 01 50 51)*

Note: Excludes containers, shipping costs and recycling fees. See CSI section 26 01 50 51-0384 for recycling hazardous lamps.

26 01 50 51-0376	EA	Removal Of 2' Length Linear Fluorescent Lamps	3.97	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-1.31*	
26 01 50 51-0377	EA	Removal Of 3' Length Linear Fluorescent Lamps	4.53	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-1.49*	
26 01 50 51-0378	EA	Removal Of 4' Length Linear Fluorescent Lamps	5.10	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-1.68*	
26 01 50 51-0379	EA	Removal Of 6' Length Linear Fluorescent Lamps	5.67	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-1.87*	
26 01 50 51-0380	EA	Removal Of 8' Length Linear Fluorescent Lamps	6.23	
		For Removal Of Multiple Lamps In A Fixture, Deduct	*-2.06*	
26 01 50 51-0381	EA	Removal Of Compact Fluorescent Lamps	3.40	
		For >25 To 40, Deduct	*-0.34*	
		For >40, Deduct	*-0.68*	
26 01 50 51-0382	EA	Removal Of U-Shaped Or Circular Fluorescent Lamps	5.39	
		For >25 To 40, Deduct	*-0.54*	
		For >40, Deduct	*-1.08*	
26 01 50 51-0383	EA	Removal Of High Intensity Discharge (HID) Or Metal Halide Lamps	9.64	
		For >25 To 40, Deduct	*-0.96*	
		For >40, Deduct	*-1.93*	

26 01 50 51-0384 Recycle Hazardous Lamps *(26 01 50 51)*

Note: Includes containers, shipping costs and recycling fees. Excludes lamp removal. See CSI section 26 01 50 51-0001 for removal of lamps from fixtures.

26 01 50 51-0385	EA	Recycle 2' Length Linear Fluorescent Lamps	1.83	
26 01 50 51-0386	EA	Recycle 3' Length Linear Fluorescent Lamps	2.35	
26 01 50 51-0387	EA	Recycle 4' Length Linear Fluorescent Lamps	2.86	
26 01 50 51-0388	EA	Recycle 6' Length Linear Fluorescent Lamps	4.05	
26 01 50 51-0389	EA	Recycle 8' Length Linear Fluorescent Lamps	5.07	
26 01 50 51-0390	EA	Recycle Compact Fluorescent Lamps	4.67	
26 01 50 51-0391	EA	Recycle U-Shaped Or Circular Fluorescent Lamps	4.67	
26 01 50 51-0392	EA	Recycle High Intensity Discharge (HID) Lamps	7.38	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

26 01 50 52 Ballasts Replacement *(26 01 50)*

26 01 50 52-0001 Lighting Ballasts *(26 01 50 52)*
Note: Excludes recycling fees. See CSI section 02 84 16 00-0003 for ballast recycling.

26 01 50 52-0002 Fluorescent Ballasts *(26 01 50 52-0001)*

26 01 50 52-0003 Retrofit For Existing Ballasts, In Place *(26 01 50 52-0002)*
Note: CEE listed ballasts. Excludes ballast removal or recycling fees. See CSI section 26 01 50 52-0035 for ballast removal.

26 01 50 52-0004 Instant Start Fluorescent Ballasts *(26 01 50 52-0003)*

26 01 50 52-0005	EA	1 Lamp, Normal Or Low Power Factor, Instant Start Fluorescent Ballast (General Electric UltraMax™ 132)	53.67	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.47*	
		For High Power, Add	*3.24*	
		For Programmed Start, Add	*5.22*	
26 01 50 52-0006	EA	2 Lamp, Normal Or Low Power Factor, Instant Start Fluorescent Ballast (General Electric UltraMax™ 232)	53.67	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.47*	
		For High Power, Add	*3.24*	
		For Programmed Start, Add	*5.22*	
26 01 50 52-0007	EA	3 Lamp, Normal Or Low Power Factor, Instant Start Fluorescent Ballast (General Electric UltraMax™ 332)	59.69	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.47*	
		For High Power, Add	*2.83*	
		For Programmed Start, Add	*5.55*	
26 01 50 52-0008	EA	4 Lamp, Normal Or Low Power Factor, Instant Start Fluorescent Ballast (General Electric UltraMax™ 432)	63.60	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.47*	
		For High Power, Add	*3.19*	
		For Programmed Start, Add	*6.08*	

26 01 50 52-0009 Program/Rapid Start Fluorescent Ballasts *(26 01 50 52-0003)*

26 01 50 52-0010	EA	1 Lamp, Normal Power Factor, Program/Rapid Start Fluorescent Ballast (General Electric UltraStart® 132-MVPS-N)	79.39	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.47*	
26 01 50 52-0011	EA	2 Lamp, Normal Power Factor, Program/Rapid Start Fluorescent Ballast (General Electric UltraStart® 232-MVPS-N)	79.39	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.47*	
26 01 50 52-0012	EA	3 Lamp, Normal Power Factor, Program/Rapid Start Fluorescent Ballast (General Electric UltraStart® 332-MVPS-N)	83.91	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.47*	
26 01 50 52-0013	EA	4 Lamp, Normal Power Factor, Program/Rapid Start Fluorescent Ballast (General Electric UltraStart® 432-MVPS-N)	87.42	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.47*	
26 01 50 52-0014	EA	2 Lamp, Normal Power Factor, Program/Rapid Start Fluorescent Ballast (General Electric UltraStart® 228MVPS)	99.66	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.47*	
26 01 50 52-0015	EA	2 Lamp, Normal Power Factor, Program/Rapid Start Fluorescent Ballast (General Electric UltraStart® 254MVPS)	117.62	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.47*	
26 01 50 52-0016	EA	4 Lamp, Normal Power Factor, Program/Rapid Start Fluorescent Ballast (General Electric UltraStart® 454MVPS90)	129.56	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.47*	

26 01 50 52-0017 Slimline, Instant Start Fluorescent Ballasts *(26 01 50 52-0003)*

26 01 50 52-0018	EA	2 Lamp, Standard Performance, Normal Power Factor, Slimline, Instant Start Fluorescent Ballast (General Electric GE-259-MV-N)	73.45	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.47*	
26 01 50 52-0019	EA	2 Lamp, Premium Performance, Normal Power Factor, Slimline, Instant Start Fluorescent Ballast (General Electric GE-259-MAX-N/ULTRA)	76.45	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.47*	

26 01 50 52-0020 Step Dimming, Instant Start Fluorescent Ballasts *(26 01 50 52-0003)*

26 01 50 52-0021	EA	1 Or 2 Lamp, High Power Factor, Step Dimming, Instant Start Fluorescent Ballast (General Electric UltraMax™ 232MAX90-S60)	75.58	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.47*	
26 01 50 52-0022	EA	3 Lamp, High Power Factor, Step Dimming, Instant Start Fluorescent Ballast (General Electric UltraMax™ 332MAX90-S60)	78.70	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.47*	
26 01 50 52-0023	EA	4 Lamp, High Power Factor, Step Dimming, Instant Start Fluorescent Ballast (General Electric UltraMax™ 432MAX90-S60)	93.68	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.47*	
26 01 50 52-0024	EA	6 Lamp, High Power Factor, Step Dimming, Instant Start Fluorescent Ballast (General Electric UltraMax™ 632MAX-H90-S60)	135.45	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.47*	

26 01 50 52-0025 Load Shed 0-10 V Dimming, Instant Start Fluorescent Ballasts *(26 01 50 52-0003)*

26 01 50 52-0026	EA	1 Or 2 Lamp, High Power Factor, Load Shed 0-10 V Dimming, Instant Start Fluorescent Ballast (General Electric UltraMax™ 232MAX90-V60)	75.58	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.47*	
26 01 50 52-0027	EA	3 Lamp, High Power Factor, Load Shed 0-10 V Dimming, Instant Start Fluorescent Ballast (General Electric UltraMax™ 332MAX90-V60)	81.20	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.47*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 50 52-0028	EA	4 Lamp, High Power Factor, Load Shed 0-10 V Dimming, Instant Start Fluorescent Ballast (General Electric UltraMax™ 432MAX90-V60)	93.68	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.47*	
26 01 50 52-0029	EA	6 Lamp, High Power Factor, Load Shed 0-10 V Dimming, Instant Start Fluorescent Ballast (General Electric UltraMax™ 632MAX90-V60)	143.41	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.47*	
26 01 50 52-0030		**Dimming To 5%, Rapid Start Fluorescent Ballasts** *(26 01 50 52-0003)*		
26 01 50 52-0031	EA	1 Lamp, Normal Power Factor, Dimming To 5%, Rapid Start Fluorescent Ballast (General Electric B132R120V5)	155.44	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.47*	
26 01 50 52-0032	EA	2 Lamp, Normal Power Factor, Dimming To 5%, Rapid Start Fluorescent Ballast (General Electric B232SR120V5)	149.90	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.47*	
26 01 50 52-0033	EA	3 Lamp, Normal Power Factor, Dimming To 5%, Rapid Start Fluorescent Ballast (General Electric B332SR120V5)	160.11	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.47*	
26 01 50 52-0034	EA	4 Lamp, Normal Power Factor, Dimming To 5%, Rapid Start Fluorescent Ballast (Sylvania QTP 4X32T8/UNV DIM-TC)	178.17	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.47*	
26 01 50 52-0035		**Fluorescent Ballast Removal From Fixture** *(26 01 50 52-0002)*		
		Note: Place removed ballast in leak-proof container and transfer to on-site storage area.		
26 01 50 52-0036	EA	Fluorescent Ballast Removal	22.95	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0037	EA	Inspect Ballast To Determine If It Is T8 or T12	11.33	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.40*	
26 01 50 52-0038		**T5 Fluorescent Ballasts** *(26 01 50 52-0002)*		
26 01 50 52-0039		**T5 Fluorescent Electronic Ballasts** *(26 01 50 52-0038)*		
		Note: Includes 120/277 Volt and normal ballast factor.		
26 01 50 52-0040		**14 Watt, T5 Fluorescent Electronic Ballasts** *(26 01 50 52-0039)*		
26 01 50 52-0041	EA	1 Lamp, 14 Watt, Program/Rapid Start, T5 Fluorescent Electronic Ballast	122.36	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
		For High Ballast Factor, Add	*7.00*	
26 01 50 52-0042	EA	2 Lamp, 14 Watt, Program/Rapid Start, T5 Fluorescent Electronic Ballast	128.01	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
		For High Ballast Factor, Add	*7.00*	
26 01 50 52-0043		**21 Watt, T5 Fluorescent Electronic Ballasts** *(26 01 50 52-0039)*		
26 01 50 52-0044	EA	1 Lamp, 21 Watt, Program/Rapid Start, T5 Fluorescent Electronic Ballast	122.36	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
		For High Ballast Factor, Add	*7.00*	
26 01 50 52-0045	EA	2 Lamp, 21 Watt, Program/Rapid Start, T5 Fluorescent Electronic Ballast	128.01	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
		For High Ballast Factor, Add	*7.00*	
26 01 50 52-0046		**28 Watt, T5 Fluorescent Electronic Ballasts** *(26 01 50 52-0039)*		
26 01 50 52-0047	EA	1 Lamp, 28 Watt, Program/Rapid Start, T5 Fluorescent Electronic Ballast	122.36	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
		For High Ballast Factor, Add	*7.00*	
26 01 50 52-0048	EA	2 Lamp, 28 Watt, Program/Rapid Start, T5 Fluorescent Electronic Ballast	128.01	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
		For High Ballast Factor, Add	*7.00*	
26 01 50 52-0049		**35 Watt, T5 Fluorescent Electronic Ballasts** *(26 01 50 52-0039)*		
26 01 50 52-0050	EA	1 Lamp, 35 Watt, Program/Rapid Start, T5 Fluorescent Electronic Ballast	122.36	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0051	EA	2 Lamp, 35 Watt, Program/Rapid Start, T5 Fluorescent Electronic Ballast	128.01	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0052		**54 Watt, T5 Fluorescent Electronic Ballasts** *(26 01 50 52-0039)*		
26 01 50 52-0053	EA	1 Lamp, 54 Watt, Program/Rapid Start, T5 Fluorescent Electronic Ballast	122.22	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0054	EA	2 Lamp, 54 Watt, Program/Rapid Start, T5 Fluorescent Electronic Ballast	127.87	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0055	EA	3 Lamp, 54 Watt, Program/Rapid Start, T5 Fluorescent Electronic Ballast	175.40	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
26 01 50 52-0056	EA	4 Lamp, 54 Watt, Program/Rapid Start, T5 Fluorescent Electronic Ballast	181.07	39.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0057		**High-Output, T5HO Fluorescent Electronic Ballasts** *(26 01 50 52-0038)*		
		Note: Includes 120/277 Volt and normal ballast factor.		
26 01 50 52-0058		**12 Watt, High-Output, T5HO Fluorescent Electronic Ballasts** *(26 01 50 52-0057)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 50 52-0059	EA	1 Lamp, 12 Watt, Programmed Start, High-Output, T5HO Fluorescent Electronic Ballast	102.48	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0060	EA	2 Lamp, 12 Watt, Programmed Start, High-Output, T5HO Fluorescent Electronic Ballast	108.13	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0061		**24 Watt, High-Output, T5HO Fluorescent Electronic Ballasts** *(26 01 50 52-0057)*		
26 01 50 52-0062	EA	1 Lamp, 24 Watt, Programmed Start, High-Output, T5HO Fluorescent Electronic Ballast	134.26	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0063	EA	2 Lamp, 24 Watt, Programmed Start, High-Output, T5HO Fluorescent Electronic Ballast	139.91	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0064		**39 Watt, High-Output, T5HO Fluorescent Electronic Ballasts** *(26 01 50 52-0057)*		
26 01 50 52-0065	EA	1 Lamp, 39 Watt, Programmed Start, High-Output, T5HO Fluorescent Electronic Ballast	134.26	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0066	EA	2 Lamp, 39 Watt, Programmed Start, High-Output, T5HO Fluorescent Electronic Ballast	139.91	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0067		**54 Watt, High-Output, T5HO Fluorescent Electronic Ballasts** *(26 01 50 52-0057)*		
26 01 50 52-0068	EA	1 Lamp, 54 Watt, Programmed Start, High-Output, T5HO Fluorescent Electronic Ballast	102.48	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0069	EA	2 Lamp, 54 Watt, Programmed Start, High-Output, T5HO Fluorescent Electronic Ballast	108.13	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0070		**Dimming, T5 Fluorescent Electronic Ballasts** *(26 01 50 52-0038)*		
26 01 50 52-0071		**Step Dimming, T5 Fluorescent Electronic Ballasts** *(26 01 50 52-0070)* Note: Includes 120/277 Volt and normal ballast factor.		
26 01 50 52-0072		**28 Watt, Step Dimming, T5 Fluorescent Electronic Ballast** *(26 01 50 52-0071)*		
26 01 50 52-0073	EA	2 Lamp, 28 Watt, Programmed Start, Step Dimming, T5 Fluorescent Electronic Ballast	126.18	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0074		**Dimming To 5%, T5 Fluorescent Electronic Ballasts** *(26 01 50 52-0070)* Note: Includes 120/277 Volt and normal ballast factor.		
26 01 50 52-0075		**54 Watt, Dimming To 5%, High-Output, T5HO Fluorescent Electronic Ballasts** *(26 01 50 52-0074)*		
26 01 50 52-0076	EA	1 Lamp, 54 Watt, Programmed Start, Dimming To 5%, High-Output, T5HO Fluorescent Electronic Ballast	435.34	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0077	EA	2 Lamp, 54 Watt, Programmed Start, Dimming To 5%, High-Output, T5HO Fluorescent Electronic Ballast	428.98	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0078		**T8 Fluorescent Ballasts** *(26 01 50 52-0002)*		
26 01 50 52-0079		**T8 Fluorescent Electronic Ballasts** *(26 01 50 52-0078)* Note: Includes 120/277 Volt and low or normal ballast factor.		
26 01 50 52-0080		**17 Watt, T8 Fluorescent Electronic Ballasts** *(26 01 50 52-0079)*		
26 01 50 52-0081	EA	1 Lamp, 17 Watt, Instant Start, T8 Fluorescent Electronic Ballast	53.11	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
		For High Ballast Factor, Add	*17.03*	
26 01 50 52-0082	EA	1 Lamp, 17 Watt, Program/Rapid Start, T8 Fluorescent Electronic Ballast	94.08	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
		For High Ballast Factor, Add	*11.20*	
26 01 50 52-0083	EA	2 Lamp, 17 Watt, Instant Start, T8 Fluorescent Electronic Ballast	58.76	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
		For High Ballast Factor, Add	*17.03*	
26 01 50 52-0084	EA	2 Lamp, 17 Watt, Program/Rapid Start, T8 Fluorescent Electronic Ballast	99.73	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
		For High Ballast Factor, Add	*11.20*	
26 01 50 52-0085	EA	3 Lamp, 17 Watt, Instant Start, T8 Fluorescent Electronic Ballast	71.63	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
		For High Ballast Factor, Add	*16.58*	
26 01 50 52-0086	EA	3 Lamp, 17 Watt, Program/Rapid Start, T8 Fluorescent Electronic Ballast	111.70	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
		For High Ballast Factor, Add	*9.52*	
26 01 50 52-0087	EA	4 Lamp, 17 Watt, Instant Start, T8 Fluorescent Electronic Ballast	81.97	39.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
		For High Ballast Factor, Add	*41.98*	
26 01 50 52-0088	EA	4 Lamp, 17 Watt, Program/Rapid Start, T8 Fluorescent Electronic Ballast	122.27	39.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
		For High Ballast Factor, Add	*24.50*	
26 01 50 52-0089		**25 Watt, T8 Fluorescent Electronic Ballasts** *(26 01 50 52-0079)*		
26 01 50 52-0090	EA	1 Lamp, 25 Watt, Instant Start, T8 Fluorescent Electronic Ballast	53.11	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
		For High Ballast Factor, Add	*17.03*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 50 52-0091	EA	1 Lamp, 25 Watt, Program/Rapid Start, T8 Fluorescent Electronic Ballast	94.08	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
		For High Ballast Factor, Add	*11.20*	
26 01 50 52-0092	EA	2 Lamp, 25 Watt, Instant Start, T8 Fluorescent Electronic Ballast	58.76	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
		For High Ballast Factor, Add	*17.03*	
26 01 50 52-0093	EA	2 Lamp, 25 Watt, Program/Rapid Start, T8 Fluorescent Electronic Ballast	99.73	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
		For High Ballast Factor, Add	*11.20*	
26 01 50 52-0094	EA	3 Lamp, 25 Watt, Instant Start, T8 Fluorescent Electronic Ballast	71.63	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
		For High Ballast Factor, Add	*16.58*	
26 01 50 52-0095	EA	3 Lamp, 25 Watt, Program/Rapid Start, T8 Fluorescent Electronic Ballast	111.70	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
		For High Ballast Factor, Add	*9.52*	
26 01 50 52-0096	EA	4 Lamp, 25 Watt, Instant Start, T8 Fluorescent Electronic Ballast	81.97	39.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
		For High Ballast Factor, Add	*41.98*	
26 01 50 52-0097	EA	4 Lamp, 25 Watt, Program/Rapid Start, T8 Fluorescent Electronic Ballast	122.27	39.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
		For High Ballast Factor, Add	*24.50*	
26 01 50 52-0098		**28 Watt, T8 Fluorescent Electronic Ballasts** *(26 01 50 52-0079)*		
26 01 50 52-0099	EA	1 Lamp, 28 Watt, Instant Start, T8 Fluorescent Electronic Ballast	53.11	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
		For High Ballast Factor, Add	*17.03*	
26 01 50 52-0100	EA	1 Lamp, 28 Watt, Program/Rapid Start, T8 Fluorescent Electronic Ballast	94.08	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
		For High Ballast Factor, Add	*11.20*	
26 01 50 52-0101	EA	2 Lamp, 28 Watt, Instant Start, T8 Fluorescent Electronic Ballast	58.76	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
		For High Ballast Factor, Add	*17.03*	
26 01 50 52-0102	EA	2 Lamp, 28 Watt, Program/Rapid Start, T8 Fluorescent Electronic Ballast	99.73	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
		For High Ballast Factor, Add	*11.20*	
26 01 50 52-0103	EA	3 Lamp, 28 Watt, Instant Start, T8 Fluorescent Electronic Ballast	71.63	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
		For High Ballast Factor, Add	*16.58*	
26 01 50 52-0104	EA	3 Lamp, 28 Watt, Program/Rapid Start, T8 Fluorescent Electronic Ballast	111.70	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
		For High Ballast Factor, Add	*9.52*	
26 01 50 52-0105	EA	4 Lamp, 28 Watt, Instant Start, T8 Fluorescent Electronic Ballast	81.97	39.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
		For High Ballast Factor, Add	*41.98*	
26 01 50 52-0106	EA	4 Lamp, 28 Watt, Program/Rapid Start, T8 Fluorescent Electronic Ballast	122.27	39.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
		For High Ballast Factor, Add	*24.50*	
26 01 50 52-0107		**32 Watt, T8 Fluorescent Electronic Ballasts** *(26 01 50 52-0079)*		
26 01 50 52-0108	EA	1 Lamp, 32 Watt, Instant Start, T8 Fluorescent Electronic Ballast	53.11	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
		For High Ballast Factor, Add	*17.03*	
26 01 50 52-0109	EA	1 Lamp, 32 Watt, Program/Rapid Start, T8 Fluorescent Electronic Ballast	94.08	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
		For High Ballast Factor, Add	*11.20*	
26 01 50 52-0110	EA	2 Lamp, 32 Watt, Instant Start, T8 Fluorescent Electronic Ballast	58.76	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
		For High Ballast Factor, Add	*17.03*	
26 01 50 52-0111	EA	2 Lamp, 32 Watt, Program/Rapid Start, T8 Fluorescent Electronic Ballast	99.73	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
		For High Ballast Factor, Add	*11.20*	
26 01 50 52-0112	EA	3 Lamp, 32 Watt, Instant Start, T8 Fluorescent Electronic Ballast	71.63	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
		For High Ballast Factor, Add	*16.58*	
26 01 50 52-0113	EA	3 Lamp, 32 Watt, Program/Rapid Start, T8 Fluorescent Electronic Ballast	111.70	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
		For High Ballast Factor, Add	*9.52*	
26 01 50 52-0114	EA	4 Lamp, 32 Watt, Instant Start, T8 Fluorescent Electronic Ballast	81.97	39.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
		For High Ballast Factor, Add	*41.98*	
26 01 50 52-0115	EA	4 Lamp, 32 Watt, Program/Rapid Start, T8 Fluorescent Electronic Ballast	122.27	39.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
		For High Ballast Factor, Add	*24.50*	
26 01 50 52-0116		**40 Watt, T8 Fluorescent Electronic Ballasts** *(26 01 50 52-0079)*		
26 01 50 52-0117	EA	1 Lamp, 40 Watt, Instant Start, T8 Fluorescent Electronic Ballast	85.40	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
		For High Ballast Factor, Add	*7.28*	
26 01 50 52-0118	EA	1 Lamp, 40 Watt, Program/Rapid Start, T8 Fluorescent Electronic Ballast	94.08	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
		For High Ballast Factor, Add	*11.20*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 50 52-0119	EA	2 Lamp, 40 Watt, Instant Start, T8 Fluorescent Electronic Ballast	91.05	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
		For High Ballast Factor, Add	*7.28*	
26 01 50 52-0120	EA	2 Lamp, 40 Watt, Program/Rapid Start, T8 Fluorescent Electronic Ballast	99.73	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
		For High Ballast Factor, Add	*11.20*	
26 01 50 52-0121	EA	3 Lamp, 40 Watt, Instant Start, T8 Fluorescent Electronic Ballast	113.80	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
		For High Ballast Factor, Add	*4.48*	
26 01 50 52-0122	EA	3 Lamp, 40 Watt, Program/Rapid Start, T8 Fluorescent Electronic Ballast	111.70	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
26 01 50 52-0123	EA	4 Lamp, 40 Watt, Instant Start, T8 Fluorescent Electronic Ballast	119.47	39.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
		For High Ballast Factor, Add	*4.48*	
26 01 50 52-0124	EA	4 Lamp, 40 Watt, Program/Rapid Start, T8 Fluorescent Electronic Ballast	122.27	39.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0125		**96 Watt, T8 Fluorescent Electronic Ballasts** *(26 01 50 52-0079)*		
26 01 50 52-0126	EA	1 Lamp, 96 Watt, Instant Start, T8 Fluorescent Electronic Ballast	102.48	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
		For High Ballast Factor, Add	*15.60*	
26 01 50 52-0127	EA	2 Lamp, 96 Watt, Instant Start, T8 Fluorescent Electronic Ballast	108.13	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
		For High Ballast Factor, Add	*15.60*	
26 01 50 52-0128		**High-Output, T8HO Fluorescent Electronic Ballasts** *(26 01 50 52-0078)*		
		Note: Includes 120/277 Volt and normal ballast factor.		
26 01 50 52-0129		**48 Watt, High-Output, T8HO Fluorescent Electronic Ballasts** *(26 01 50 52-0128)*		
26 01 50 52-0130	EA	1 Lamp, 48 Watt, Instant Start, High-Output, T8HO Fluorescent Electronic Ballast	124.46	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0131	EA	1 Lamp, 48 Watt, Programmed Start, High-Output, T8HO Fluorescent Electronic Ballast	162.43	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0132	EA	2 Lamp, 48 Watt, Instant Start, High-Output, T8HO Fluorescent Electronic Ballast	130.11	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0133	EA	2 Lamp, 48 Watt, Programmed Start, High-Output, T8HO Fluorescent Electronic Ballast	168.08	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0134		**60 Watt, High-Output, T8HO Fluorescent Electronic Ballasts** *(26 01 50 52-0128)*		
26 01 50 52-0135	EA	1 Lamp, 60 Watt, Instant Start, High-Output, T8HO Fluorescent Electronic Ballast	124.46	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0136	EA	1 Lamp, 60 Watt, Programmed Start, High-Output, T8HO Fluorescent Electronic Ballast	162.43	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0137	EA	2 Lamp, 60 Watt, Instant Start, High-Output, T8HO Fluorescent Electronic Ballast	130.11	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0138	EA	2 Lamp, 60 Watt, Programmed Start, High-Output, T8HO Fluorescent Electronic Ballast	168.08	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0139		**72 Watt, High-Output, T8HO Fluorescent Electronic Ballasts** *(26 01 50 52-0128)*		
26 01 50 52-0140	EA	1 Lamp, 72 Watt, Instant Start, High-Output, T8HO Fluorescent Electronic Ballast	124.46	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0141	EA	1 Lamp, 72 Watt, Programmed Start, High-Output, T8HO Fluorescent Electronic Ballast	162.43	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0142	EA	2 Lamp, 72 Watt, Instant Start, High-Output, T8HO Fluorescent Electronic Ballast	130.11	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0143	EA	2 Lamp, 72 Watt, Programmed Start, High-Output, T8HO Fluorescent Electronic Ballast	168.08	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0144		**96 Watt, High-Output, T8HO Fluorescent Electronic Ballasts** *(26 01 50 52-0128)*		
26 01 50 52-0145	EA	1 Lamp, 96 Watt, Instant Start, High-Output, T8HO Fluorescent Electronic Ballast	124.46	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0146	EA	1 Lamp, 96 Watt, Programmed Start, High-Output, T8HO Fluorescent Electronic Ballast	162.43	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0147	EA	2 Lamp, 96 Watt, Instant Start, High-Output, T8HO Fluorescent Electronic Ballast	130.11	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0148	EA	2 Lamp, 96 Watt, Programmed Start, High-Output, T8HO Fluorescent Electronic Ballast	168.08	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0149		**Dimming, T8 Fluorescent Electronic Ballasts** *(26 01 50 52-0078)*		
26 01 50 52-0150		**Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballasts** *(26 01 50 52-0149)*		
		Note: Includes 120/277 Volt and high ballast factor.		
26 01 50 52-0151		**17 Watt, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballasts** *(26 01 50 52-0150)*		
26 01 50 52-0152	EA	1 Lamp, 17 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	70.03	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 50 52-0153	EA	2 Lamp, 17 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	75.68	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0154	EA	3 Lamp, 17 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	86.97	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
26 01 50 52-0155	EA	4 Lamp, 17 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	105.12	39.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0156	EA	5 Lamp, 17 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	160.51	45.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
26 01 50 52-0157	EA	6 Lamp, 17 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	166.18	50.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.30*	
26 01 50 52-0158		**25 Watt, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballasts** *(26 01 50 52-0150)*		
26 01 50 52-0159	EA	1 Lamp, 25 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	70.03	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0160	EA	2 Lamp, 25 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	75.68	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0161	EA	3 Lamp, 25 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	86.97	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
26 01 50 52-0162	EA	4 Lamp, 25 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	105.12	39.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0163	EA	5 Lamp, 25 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	160.51	45.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
26 01 50 52-0164	EA	6 Lamp, 25 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	166.18	50.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.30*	
26 01 50 52-0165		**28 Watt, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballasts** *(26 01 50 52-0150)*		
26 01 50 52-0166	EA	1 Lamp, 28 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	70.03	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0167	EA	2 Lamp, 28 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	75.68	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0168	EA	3 Lamp, 28 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	86.97	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
26 01 50 52-0169	EA	4 Lamp, 28 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	105.12	39.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0170	EA	5 Lamp, 28 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	160.51	45.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
26 01 50 52-0171	EA	6 Lamp, 28 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	166.18	50.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.30*	
26 01 50 52-0172		**32 Watt, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballasts** *(26 01 50 52-0150)*		
26 01 50 52-0173	EA	1 Lamp, 32 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	70.03	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0174	EA	2 Lamp, 32 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	75.68	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0175	EA	3 Lamp, 32 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	86.97	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
26 01 50 52-0176	EA	4 Lamp, 32 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	105.12	39.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0177	EA	5 Lamp, 32 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	160.51	45.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
26 01 50 52-0178	EA	6 Lamp, 32 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	166.18	50.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.30*	
26 01 50 52-0179		**40 Watt, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballasts** *(26 01 50 52-0150)*		
26 01 50 52-0180	EA	1 Lamp, 40 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	70.03	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0181	EA	2 Lamp, 40 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	75.68	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0182	EA	3 Lamp, 40 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	86.97	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
26 01 50 52-0183	EA	4 Lamp, 40 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	105.12	39.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0184	EA	5 Lamp, 40 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	160.51	45.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
26 01 50 52-0185	EA	6 Lamp, 40 Watt, Instant Start, Load Shed 0-10 V Dimming, T8 Fluorescent Electronic Ballast	166.18	50.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.30*	
26 01 50 52-0186		**Step Dimming, T8 Fluorescent Electronic Ballasts** *(26 01 50 52-0149)*		
		Note: Includes 120/277 Volt and high ballast factor.		
26 01 50 52-0187		**17 Watt, Step Dimming, T8 Fluorescent Electronic Ballasts** *(26 01 50 52-0186)*		
26 01 50 52-0188	EA	1 Lamp, 17 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	70.03	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0189	EA	2 Lamp, 17 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	75.68	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 50 52-0190	EA	3 Lamp, 17 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	84.47	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
26 01 50 52-0191	EA	4 Lamp, 17 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	105.12	39.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0192	EA	5 Lamp, 17 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	152.55	45.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
26 01 50 52-0193	EA	6 Lamp, 17 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	158.22	50.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.30*	

26 01 50 52-0194 25 Watt, Step Dimming, T8 Fluorescent Electronic Ballasts *(26 01 50 52-0186)*

26 01 50 52-0195	EA	1 Lamp, 25 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	70.03	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0196	EA	2 Lamp, 25 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	75.68	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0197	EA	3 Lamp, 25 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	84.47	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
26 01 50 52-0198	EA	4 Lamp, 25 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	105.12	39.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0199	EA	5 Lamp, 25 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	152.55	45.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
26 01 50 52-0200	EA	6 Lamp, 25 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	158.22	50.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.30*	

26 01 50 52-0201 28 Watt, Step Dimming, T8 Fluorescent Electronic Ballasts *(26 01 50 52-0186)*

26 01 50 52-0202	EA	1 Lamp, 28 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	70.03	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0203	EA	2 Lamp, 28 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	75.68	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0204	EA	3 Lamp, 28 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	84.47	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
26 01 50 52-0205	EA	4 Lamp, 28 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	105.12	39.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0206	EA	5 Lamp, 28 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	152.55	45.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
26 01 50 52-0207	EA	6 Lamp, 28 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	158.22	50.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.30*	

26 01 50 52-0208 32 Watt, Step Dimming, T8 Fluorescent Electronic Ballasts *(26 01 50 52-0186)*

26 01 50 52-0209	EA	1 Lamp, 32 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	70.03	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0210	EA	2 Lamp, 32 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	75.68	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0211	EA	3 Lamp, 32 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	84.47	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
26 01 50 52-0212	EA	4 Lamp, 32 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	105.12	39.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0213	EA	5 Lamp, 32 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	152.55	45.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
26 01 50 52-0214	EA	6 Lamp, 32 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	158.22	50.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.30*	

26 01 50 52-0215 40 Watt, Step Dimming, T8 Fluorescent Electronic Ballasts *(26 01 50 52-0186)*

26 01 50 52-0216	EA	1 Lamp, 40 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	70.03	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0217	EA	2 Lamp, 40 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	75.68	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0218	EA	3 Lamp, 40 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	84.47	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
26 01 50 52-0219	EA	4 Lamp, 40 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	105.12	39.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0220	EA	5 Lamp, 40 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	152.55	45.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
26 01 50 52-0221	EA	6 Lamp, 40 Watt, Instant Start, Step Dimming, T8 Fluorescent Electronic Ballast	158.22	50.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.30*	

26 01 50 52-0222 Dimming To 3%, T8 Fluorescent Electronic Ballasts *(26 01 50 52-0149)*

Note: Includes 120/277 Volt and normal ballast factor.

26 01 50 52-0223 17 Watt, Dimming To 3%, T8 Fluorescent Electronic Ballasts *(26 01 50 52-0222)*

26 01 50 52-0224	EA	1 Lamp, 17 Watt, Program/Rapid Start, Dimming To 3%, T8 Fluorescent Electronic Ballast	153.58	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0225	EA	2 Lamp, 17 Watt, Program/Rapid Start, Dimming To 3%, T8 Fluorescent Electronic Ballast	159.23	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0226	EA	3 Lamp, 17 Watt, Program/Rapid Start, Dimming To 3%, T8 Fluorescent Electronic Ballast	190.24	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
26 01 50 52-0227	EA	4 Lamp, 17 Watt, Program/Rapid Start, Dimming To 3%, T8 Fluorescent Electronic Ballast	195.91	39.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 50 52-0228		**25 Watt, Dimming To 3%, T8 Fluorescent Electronic Ballasts** *(26 01 50 52-0222)*		
26 01 50 52-0229	EA	1 Lamp, 25 Watt, Program/Rapid Start, Dimming To 3%, T8 Fluorescent Electronic Ballast	153.58	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0230	EA	2 Lamp, 25 Watt, Program/Rapid Start, Dimming To 3%, T8 Fluorescent Electronic Ballast	159.23	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0231	EA	3 Lamp, 25 Watt, Program/Rapid Start, Dimming To 3%, T8 Fluorescent Electronic Ballast	190.24	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
26 01 50 52-0232	EA	4 Lamp, 25 Watt, Program/Rapid Start, Dimming To 3%, T8 Fluorescent Electronic Ballast	195.91	39.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0233		**28 Watt, Dimming To 3%, T8 Fluorescent Electronic Ballasts** *(26 01 50 52-0222)*		
26 01 50 52-0234	EA	1 Lamp, 28 Watt, Program/Rapid Start, Dimming To 3%, T8 Fluorescent Electronic Ballast	153.58	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0235	EA	2 Lamp, 28 Watt, Program/Rapid Start, Dimming To 3%, T8 Fluorescent Electronic Ballast	159.23	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0236	EA	3 Lamp, 28 Watt, Program/Rapid Start, Dimming To 3%, T8 Fluorescent Electronic Ballast	190.24	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
26 01 50 52-0237	EA	4 Lamp, 28 Watt, Program/Rapid Start, Dimming To 3%, T8 Fluorescent Electronic Ballast	195.91	39.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0238		**32 Watt, Dimming To 3%, T8 Fluorescent Electronic Ballasts** *(26 01 50 52-0222)*		
26 01 50 52-0239	EA	1 Lamp, 32 Watt, Program/Rapid Start, Dimming To 3%, T8 Fluorescent Electronic Ballast	153.58	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0240	EA	2 Lamp, 32 Watt, Program/Rapid Start, Dimming To 3%, T8 Fluorescent Electronic Ballast	159.23	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0241	EA	3 Lamp, 32 Watt, Program/Rapid Start, Dimming To 3%, T8 Fluorescent Electronic Ballast	190.24	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
26 01 50 52-0242	EA	4 Lamp, 32 Watt, Program/Rapid Start, Dimming To 3%, T8 Fluorescent Electronic Ballast	195.91	39.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0243		**T10 Fluorescent Ballasts** *(26 01 50 52-0002)*		
26 01 50 52-0244		**T10 Fluorescent Electronic Ballasts** *(26 01 50 52-0243)*		
		Note: Includes 120/277 Volt and normal ballast factor.		
26 01 50 52-0245		**40 Watt, T10 Fluorescent Electronic Ballasts** *(26 01 50 52-0244)*		
26 01 50 52-0246	EA	1 Lamp, 40 Watt, Program/Rapid Start, T10 Fluorescent Electronic Ballast	75.59	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0247	EA	2 Lamp, 40 Watt, Program/Rapid Start, T10 Fluorescent Electronic Ballast	81.24	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0248	EA	3 Lamp, 40 Watt, Program/Rapid Start, T10 Fluorescent Electronic Ballast	99.66	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
26 01 50 52-0249		**T12 Fluorescent Ballasts** *(26 01 50 52-0002)*		
26 01 50 52-0250		**T12 Fluorescent Electronic Ballasts** *(26 01 50 52-0249)*		
		Note: Includes 120/277 Volt and normal ballast factor.		
26 01 50 52-0251		**25 Watt, T12 Fluorescent Electronic Ballasts** *(26 01 50 52-0250)*		
26 01 50 52-0252	EA	1 Lamp, 25 Watt, Instant Start, T12 Fluorescent Electronic Ballast	53.11	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0253	EA	1 Lamp, 25 Watt, Program/Rapid Start, T12 Fluorescent Electronic Ballast	75.59	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0254	EA	2 Lamp, 25 Watt, Instant Start, T12 Fluorescent Electronic Ballast	58.76	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0255	EA	2 Lamp, 25 Watt, Program/Rapid Start, T12 Fluorescent Electronic Ballast	81.24	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0256	EA	3 Lamp, 25 Watt, Instant Start, T12 Fluorescent Electronic Ballast	71.63	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
26 01 50 52-0257	EA	4 Lamp, 25 Watt, Instant Start, T12 Fluorescent Electronic Ballast	81.97	39.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0258		**30 Watt, T12 Fluorescent Electronic Ballasts** *(26 01 50 52-0250)*		
26 01 50 52-0259	EA	1 Lamp, 30 Watt, Program/Rapid Start, T12 Fluorescent Electronic Ballast	75.59	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0260	EA	2 Lamp, 30 Watt, Program/Rapid Start, T12 Fluorescent Electronic Ballast	81.24	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0261	EA	3 Lamp, 30 Watt, Program/Rapid Start, T12 Fluorescent Electronic Ballast	99.66	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
26 01 50 52-0262		**34 Watt, T12 Fluorescent Electronic Ballasts** *(26 01 50 52-0250)*		
26 01 50 52-0263	EA	1 Lamp, 34 Watt, Program/Rapid Start, T12 Fluorescent Electronic Ballast	75.59	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0264	EA	2 Lamp, 34 Watt, Program/Rapid Start, T12 Fluorescent Electronic Ballast	81.24	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0265	EA	3 Lamp, 34 Watt, Program/Rapid Start, T12 Fluorescent Electronic Ballast	99.66	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 50 52-0266		**40 Watt, T12 Fluorescent Electronic Ballasts** *(26 01 50 52-0250)*		
26 01 50 52-0267	EA	1 Lamp, 40 Watt, Program/Rapid Start, T12 Fluorescent Electronic Ballast	75.59	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0268	EA	2 Lamp, 40 Watt, Program/Rapid Start, T12 Fluorescent Electronic Ballast	81.24	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0269	EA	3 Lamp, 40 Watt, Program/Rapid Start, T12 Fluorescent Electronic Ballast	99.66	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
26 01 50 52-0270		**96 Watt, T12 Fluorescent Electronic Ballasts** *(26 01 50 52-0250)*		
26 01 50 52-0271	EA	1 Lamp, 96 Watt, Program/Rapid Start, T12 Fluorescent Electronic Ballast	95.06	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0272	EA	2 Lamp, 96 Watt, Program/Rapid Start, T12 Fluorescent Electronic Ballast	108.13	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0273		**High-Output, T12HO Fluorescent Electronic Ballasts** *(26 01 50 52-0249)*		
		Note: Includes 120/277 Volt and normal ballast factor.		
26 01 50 52-0274		**48 Watt, High-Output, T12HO Fluorescent Electronic Ballasts** *(26 01 50 52-0273)*		
26 01 50 52-0275	EA	1 Lamp, 48 Watt, Program/Rapid Start, High-Output, T12HO Fluorescent Electronic Ballast	124.88	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0276	EA	2 Lamp, 48 Watt, Program/Rapid Start, High-Output, T12HO Fluorescent Electronic Ballast	130.53	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0277		**60 Watt, High-Output, T12HO Fluorescent Electronic Ballasts** *(26 01 50 52-0273)*		
26 01 50 52-0278	EA	1 Lamp, 60 Watt, Program/Rapid Start, High-Output, T12HO Fluorescent Electronic Ballast	124.88	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0279	EA	2 Lamp, 60 Watt, Program/Rapid Start, High-Output, T12HO Fluorescent Electronic Ballast	130.53	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0280		**72 Watt, High-Output, T12HO Fluorescent Electronic Ballasts** *(26 01 50 52-0273)*		
26 01 50 52-0281	EA	1 Lamp, 72 Watt, Program/Rapid Start, High-Output, T12HO Fluorescent Electronic Ballast	124.88	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0282	EA	2 Lamp, 72 Watt, Program/Rapid Start, High-Output, T12HO Fluorescent Electronic Ballast	130.53	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0283		**96 Watt, High-Output, T12HO Fluorescent Electronic Ballasts** *(26 01 50 52-0273)*		
26 01 50 52-0284	EA	2 Lamp, 96 Watt, Program/Rapid Start, High-Output, T12HO Fluorescent Electronic Ballast	124.88	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0285	EA	2 Lamp, 96 Watt, Program/Rapid Start, High-Output, T12HO Fluorescent Electronic Ballast	130.53	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0286		**Emergency Fluorescent Ballasts** *(26 01 50 52-0002)*		
		Note: 120/277 Volt.		
26 01 50 52-0287	EA	350 To 450 Lumens, One Lamp, Code Compliance, Ninety Minute Illumination, Emergency Fluorescent Ballast (Bodine B100)	194.91	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
		For Factory Installation In New Fixtures, Deduct	*-45.32*	
26 01 50 52-0288	EA	600 To 700 Lumens, Two Lamp, Ninety Minute Illumination, Emergency Fluorescent Ballast (Bodine B60)	323.78	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.28*	
		For Factory Installation In New Fixtures, Deduct	*-47.59*	
26 01 50 52-0289	EA	1,100 To 1,400 Lumens, One Or Two Lamp, Ninety Minute Illumination, Emergency Fluorescent Ballast (Bodine B50)	403.61	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.28*	
		For Factory Installation In New Fixtures, Deduct	*-47.59*	
26 01 50 52-0290	EA	600 To 700 Lumens, One Or Two Lamp, Two Hour Illumination, Emergency Fluorescent Ballast (Bodine B70A)	297.09	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.28*	
		For Factory Installation In New Fixtures, Deduct	*-47.59*	
26 01 50 52-0291	EA	2,700 To 3,400 Lumens, Two Or Three Lamp, Ninety Minute Illumination, Emergency Fluorescent Ballast (Bodine B33)	1,413.07	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.96*	
		For Factory Installation In New Fixtures, Deduct	*-49.85*	
26 01 50 52-0292	EA	225 To 450 Lumens, One Lamp, Four Hour Illumination, Emergency Fluorescent Ballast (Bodine B54)	409.74	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
		For Factory Installation In New Fixtures, Deduct	*-45.32*	
26 01 50 52-0293	EA	325 To 1,000 Lumens, One Or Two Lamp, Ninety Minute Illumination, Emergency Compact Fluorescent Ballast (Bodine B84CG)	689.97	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.28*	
		For Factory Installation In New Fixtures, Deduct	*-47.59*	
26 01 50 52-0294	EA	300 To 750 Lumens, One Or Two Lamp, Ninety Minute Illumination, Emergency Compact Fluorescent Ballast (Bodine B94CG)	377.32	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.28*	
		For Factory Installation In New Fixtures, Deduct	*-47.59*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 50 52-0295	EA	200 To 625 Lumens, One Lamp, Ninety Minute Illumination, Damp Location, Emergency Compact Fluorescent Ballast (Bodine B413)	516.74	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
		For Factory Installation In New Fixtures, Deduct	*-45.32*	
26 01 50 52-0296	EA	300 To 650 Lumens, One Lamp, Damp Location, Ninety Minute Illumination, Emergency Compact Fluorescent Ballast (Bodine B463)	399.55	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
		For Factory Installation In New Fixtures, Deduct	*-45.32*	
26 01 50 52-0297	EA	450 To 950 Lumens, One Or Two Lamp, Ninety Minute Illumination, Damp Location, Emergency Compact Fluorescent Ballast (Bodine B426)	451.69	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.28*	
		For Factory Installation In New Fixtures, Deduct	*-47.59*	
26 01 50 52-0298	EA	1,100 To 1,400 Lumens, One Or Two Lamp, Ninety Minute Illumination, Damp Location, Emergency Fluorescent Ballast (Bodine BDL500)	489.24	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.28*	
		For Factory Installation In New Fixtures, Deduct	*-47.59*	
26 01 50 52-0299	EA	600 To 700 Lumens, Two Lamp, Damp Location, Emergency Fluorescent Ballast (Bodine BDL600)	410.92	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.28*	
		For Factory Installation In New Fixtures, Deduct	*-47.59*	
26 01 50 52-0300	EA	600 To 700 Lumens, One Lamp, Two Hour Illumination, Emergency Fluorescent Ballast (Bodine BDL700)	417.53	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
		For Factory Installation In New Fixtures, Deduct	*-45.32*	
26 01 50 52-0301	EA	500 To 600 Lumens, One Lamp, Damp Location, Ninety Minute Illumination, Emergency Fluorescent Ballast (Bodine BDL900)	363.23	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
		For Factory Installation In New Fixtures, Deduct	*-45.32*	
26 01 50 52-0302	EA	300 To 750 Lumens, One Or Two Lamp, Damp Location, Ninety Minute Illumination, Emergency Compact Fluorescent Ballast (Bodine BDL94C)	377.32	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.28*	
		For Factory Installation In New Fixtures, Deduct	*-47.59*	
26 01 50 52-0303	EA	450 Lumens, One Lamp, Low Profile, Ninety Minute Illumination, Emergency Fluorescent Ballast (Bodine LP400)	369.08	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
		For Factory Installation In New Fixtures, Deduct	*-45.32*	
26 01 50 52-0304	EA	1,100 To 1,400 Lumens, One Or Two Lamp, Self Testing, Ninety Minute Illumination, Emergency Fluorescent Ballast (Bodine B50ST)	679.05	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.28*	
		For Factory Installation In New Fixtures, Deduct	*-47.59*	
26 01 50 52-0305	EA	1,800 To 3,500 Lumens, One Or Two Lamp, Self Testing, Ninety Minute Illumination, Emergency Fluorescent Ballast (Bodine B30ST)	850.34	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.28*	
		For Factory Installation In New Fixtures, Deduct	*-47.59*	
26 01 50 52-0306	EA	1,450 To 3,500 Lumens, One Or Two Lamp, Remote Control Testing, Ninety Minute Illumination, Emergency Fluorescent Ballast (Bodine B30RCT)	1,595.43	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.28*	
		For Factory Installation In New Fixtures, Deduct	*-47.59*	
26 01 50 52-0307	EA	1,100 To 1,400 Lumens, One Or Two Lamp, Remote Control Testing, Ninety Minute Illumination, Emergency Fluorescent Ballast (Bodine B50RCT)	1,106.78	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.28*	
		For Factory Installation In New Fixtures, Deduct	*-47.59*	
26 01 50 52-0308	EA	1,100 To 3,100 Lumens, One Or Two Lamp, Central Battery, Emergency Fluorescent Ballast With Voltage Sensing Circuit (Bodine CB90-48)	560.45	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.28*	
		For Factory Installation In New Fixtures, Deduct	*-47.59*	
26 01 50 52-0309	EA	1,050 To 3,200 Lumens, One Lamp, Interim Lighting For Generator Backup, Five Minute Illumination, Emergency Fluorescent Ballast (Bodine GEN1)	728.24	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
		For Factory Installation In New Fixtures, Deduct	*-45.32*	
26 01 50 52-0310	EA	250 Watt, Self-Diagnostic, Ninety Minute Illumination, Fluorescent Emergency Lighting Inverter (Bodine ELI-250-SD)	4,095.73	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
		For Factory Installation In New Fixtures, Deduct	*-45.32*	

26 01 50 52-0311 LED Emergency Ballasts *(26 01 50 52-0001)*

26 01 50 52-0312	EA	Up To 520 Lumens, Ninety Minute Illumination, 120-277 Volt, 4 Watt Output, Emergency LED Driver (Bodine BSL4L)	143.09	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
		For Factory Installation In New Fixtures, Deduct	*-45.32*	
26 01 50 52-0313	EA	Up To 780 Lumens, Ninety Minute Illumination, 120-277 Volt, 6 Watt Output, Emergency LED Driver (Bodine BSL6LST)	215.62	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
		For Factory Installation In New Fixtures, Deduct	*-45.32*	
26 01 50 52-0314	EA	Up To 975 Lumens, Ninety Minute Illumination, 120-277 Volt, 7.5 Watt Output, Emergency LED Driver (Bodine BSL17C)	259.12	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
		For Factory Installation In New Fixtures, Deduct	*-45.32*	
26 01 50 52-0315	EA	Up To 1,300 Lumens, Ninety Minute Illumination, 120-277 Volt, 10 Watt Output, Emergency LED Driver (Bodine BSL310)	290.17	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
		For Factory Installation In New Fixtures, Deduct	*-45.32*	
26 01 50 52-0316	EA	Up To 2,200 Lumens, Ninety Minute Illumination, 120-277 Volt, 18 Watt Output, Emergency LED Driver (Bodine BSL718)	298.02	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
		For Factory Installation In New Fixtures, Deduct	*-45.32*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 50 52-0317	EA	Up To 2,600 Lumens, Ninety Minute Illumination, 120-277 Volt, 20 Watt Output, Emergency LED Driver (Bodine BSL20LV)	388.92	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
		For Factory Installation In New Fixtures, Deduct	*-45.32*	
26 01 50 52-0318	EA	Up To 2,300 Lumens, Ninety Minute Illumination, 120-277 Volt, 23 Watt LED Emergency Battery Backup (LiteTronics EB23UQ)	461.85	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
		For Factory Installation In New Fixtures, Deduct	*-45.32*	
26 01 50 52-0319		Compact Fluorescent Ballasts *(26 01 50 52-0001)*		
26 01 50 52-0320		Compact Fluorescent Electronic Ballasts *(26 01 50 52-0319)* Note: Includes 120/277 Volt and normal ballast factor.		
26 01 50 52-0321		18 Watt, Compact Fluorescent Electronic Ballasts *(26 01 50 52-0320)*		
26 01 50 52-0322	EA	1 Lamp, 18 Watt, Program/Rapid Start, Compact Fluorescent Electronic Ballast	115.64	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0323	EA	2 Lamp, 18 Watt, Program/Rapid Start, Compact Fluorescent Electronic Ballast	121.29	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0324		26 Watt, Compact Fluorescent Electronic Ballasts *(26 01 50 52-0320)*		
26 01 50 52-0325	EA	1 Lamp, 26 Watt, Program/Rapid Start, Compact Fluorescent Electronic Ballast	115.64	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0326	EA	2 Lamp, 26 Watt, Program/Rapid Start, Compact Fluorescent Electronic Ballast	121.29	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0327		32 Watt, Compact Fluorescent Electronic Ballasts *(26 01 50 52-0320)*		
26 01 50 52-0328	EA	1 Lamp, 32 Watt, Program/Rapid Start, Compact Fluorescent Electronic Ballast	143.78	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0329	EA	2 Lamp, 32 Watt, Program/Rapid Start, Compact Fluorescent Electronic Ballast	149.43	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0330		40 Watt, Compact Fluorescent Electronic Ballasts *(26 01 50 52-0320)*		
26 01 50 52-0331	EA	1 Lamp, 40 Watt, Instant Start, Compact Fluorescent Electronic Ballast	112.28	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0332	EA	1 Lamp, 40 Watt, Program/Rapid Start, Compact Fluorescent Electronic Ballast	143.78	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0333	EA	2 Lamp, 40 Watt, Instant Start, Compact Fluorescent Electronic Ballast	212.47	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0334	EA	2 Lamp, 40 Watt, Program/Rapid Start, Compact Fluorescent Electronic Ballast	149.43	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0335	EA	3 Lamp, 40 Watt, Instant Start, Compact Fluorescent Electronic Ballast	251.08	33.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.20*	
26 01 50 52-0336		42 Watt, Compact Fluorescent Electronic Ballasts *(26 01 50 52-0320)*		
26 01 50 52-0337	EA	1 Lamp, 42 Watt, Program/Rapid Start, Compact Fluorescent Electronic Ballast	143.78	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0338	EA	2 Lamp, 42 Watt, Program/Rapid Start, Compact Fluorescent Electronic Ballast	149.43	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0339		55 Watt, Compact Fluorescent Electronic Ballasts *(26 01 50 52-0320)*		
26 01 50 52-0340	EA	1 Lamp, 55 Watt, Program/Rapid Start, Compact Fluorescent Electronic Ballast	143.78	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0341	EA	2 Lamp, 55 Watt, Program/Rapid Start, Compact Fluorescent Electronic Ballast	149.43	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0342		Dimming, Compact Fluorescent Electronic Ballasts *(26 01 50 52-0319)*		
26 01 50 52-0343		Dimming To 5%, Compact Fluorescent Electronic Ballasts *(26 01 50 52-0342)* Note: Includes 120/277 Volt and normal ballast factor.		
26 01 50 52-0344		18 Watt, Dimming To 5%, Compact Fluorescent Electronic Ballasts *(26 01 50 52-0343)*		
26 01 50 52-0345	EA	1 Lamp, 18 Watt, Program/Rapid Start, Dimming To 5%, Compact Fluorescent Electronic Ballast	215.75	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0346	EA	2 Lamp, 18 Watt, Program/Rapid Start, Dimming To 5%, Compact Fluorescent Electronic Ballast	221.40	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0347		26 Watt, Dimming To 5%, Compact Fluorescent Electronic Ballasts *(26 01 50 52-0343)*		
26 01 50 52-0348	EA	1 Lamp, 26 Watt, Program/Rapid Start, Dimming To 5%, Compact Fluorescent Electronic Ballast	215.75	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0349	EA	2 Lamp, 26 Watt, Program/Rapid Start, Dimming To 5%, Compact Fluorescent Electronic Ballast	221.40	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 50 52-0350		32 Watt, Dimming To 5%, Compact Fluorescent Electronic Ballasts *(26 01 50 52-0343)*		
26 01 50 52-0351	EA	1 Lamp, 32 Watt, Program/Rapid Start, Dimming To 5%, Compact Fluorescent Electronic Ballast	215.75	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0352	EA	2 Lamp, 32 Watt, Program/Rapid Start, Dimming To 5%, Compact Fluorescent Electronic Ballast	236.94	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0353		40 Watt, Dimming To 5%, Compact Fluorescent Electronic Ballasts *(26 01 50 52-0343)*		
26 01 50 52-0354	EA	2 Lamp, 40 Watt, Program/Rapid Start, Dimming To 5%, Compact Fluorescent Electronic Ballast	236.94	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0355		42 Watt, Dimming To 5%, Compact Fluorescent Electronic Ballasts *(26 01 50 52-0343)*		
26 01 50 52-0356	EA	1 Lamp, 42 Watt, Program/Rapid Start, Dimming To 5%, Compact Fluorescent Electronic Ballast	215.75	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0357	EA	2 Lamp, 42 Watt, Program/Rapid Start, Dimming To 5%, Compact Fluorescent Electronic Ballast	236.94	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0358		55 Watt, Dimming To 5%, Compact Fluorescent Electronic Ballasts *(26 01 50 52-0343)*		
26 01 50 52-0359	EA	1 Lamp, 55 Watt, Program/Rapid Start, Dimming To 5%, Compact Fluorescent Electronic Ballast	345.96	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0360	EA	2 Lamp, 55 Watt, Program/Rapid Start, Dimming To 5%, Compact Fluorescent Electronic Ballast	388.15	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0361		High Intensity Discharge (HID) Ballasts *(26 01 50 52-0001)*		
26 01 50 52-0362		Magnetic High Intensity Discharge (HID) Ballasts *(26 01 50 52-0361)*		
26 01 50 52-0363		Core And Coil High Intensity Discharge (HID) Ballasts *(26 01 50 52-0362)*		
26 01 50 52-0364		Metal Halide, Core And Coil High Intensity Discharge (HID) Ballasts *(26 01 50 52-0363)*		
26 01 50 52-0365	EA	1 Lamp, 100 Watt Metal Halide, 120/277 Volt, Core And Coil High Intensity Discharge (HID) Ballast	255.56	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0366	EA	1 Lamp, 250 Watt Metal Halide, 120/277 Volt, Core And Coil High Intensity Discharge (HID) Ballast	262.54	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0367	EA	1 Lamp, 250 Watt Metal Halide, 480 Volt, Core And Coil High Intensity Discharge (HID) Ballast	262.54	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0368	EA	1 Lamp, 400 Watt Metal Halide, 120/277 Volt, Core And Coil High Intensity Discharge (HID) Ballast	242.66	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0369	EA	1 Lamp, 400 Watt Metal Halide, 480 Volt, Core And Coil High Intensity Discharge (HID) Ballast	242.66	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0370	EA	1 Lamp, 1,000 Watt Metal Halide, 120/277 Volt, Core And Coil High Intensity Discharge (HID) Ballast	375.87	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0371	EA	1 Lamp, 1,000 Watt Metal Halide, 480 Volt, Core And Coil High Intensity Discharge (HID) Ballast	375.87	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0372	EA	1 Lamp, 1,500 Watt Metal Halide, 120/277 Volt, Core And Coil High Intensity Discharge (HID) Ballast	493.20	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0373	EA	1 Lamp, 1,500 Watt Metal Halide, 480 Volt, Core And Coil High Intensity Discharge (HID) Ballast	553.05	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0374		High Pressure Sodium, Core And Coil High Intensity Discharge (HID) Ballasts *(26 01 50 52-0363)*		
26 01 50 52-0375	EA	1 Lamp, 50 Watt High Pressure Sodium, 120/277 Volt, Core And Coil High Intensity Discharge (HID) Ballast	227.97	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0376	EA	1 Lamp, 70 Watt High Pressure Sodium, 120/277 Volt, Core And Coil High Intensity Discharge (HID) Ballast	243.58	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0377	EA	1 Lamp, 100 Watt High Pressure Sodium, 120/277 Volt, Core And Coil High Intensity Discharge (HID) Ballast	236.84	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0378	EA	1 Lamp, 150 Watt High Pressure Sodium, 120/277 Volt, Core And Coil High Intensity Discharge (HID) Ballast	283.76	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0379	EA	1 Lamp, 150 Watt High Pressure Sodium, 480 Volt, Core And Coil High Intensity Discharge (HID) Ballast	277.05	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0380	EA	1 Lamp, 250 Watt High Pressure Sodium, 120/277 Volt, Core And Coil High Intensity Discharge (HID) Ballast	320.59	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0381	EA	1 Lamp, 250 Watt High Pressure Sodium, 480 Volt, Core And Coil High Intensity Discharge (HID) Ballast	320.59	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0382	EA	1 Lamp, 400 Watt High Pressure Sodium, 120/277 Volt, Core And Coil High Intensity Discharge (HID) Ballast	393.01	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0383	EA	1 Lamp, 400 Watt High Pressure Sodium, 480 Volt, Core And Coil High Intensity Discharge (HID) Ballast	393.01	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0384	EA	1 Lamp, 1,000 Watt High Pressure Sodium, 120/277 Volt, Core And Coil High Intensity Discharge (HID) Ballast	647.11	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0385	EA	1 Lamp, 1,000 Watt High Pressure Sodium, 480 Volt, Core And Coil High Intensity Discharge (HID) Ballast	647.11	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 50 52-0386		**Mounting Brackets For Core And Coil High Intensity Discharge (HID) Ballasts** *(26 01 50 52-0363)*		
26 01 50 52-0387	EA	Single Mounting Bracket For Core And Coil Type	17.65	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.40*	
26 01 50 52-0388	EA	Double Mounting Bracket For Core And Coil Type	29.69	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.10*	
26 01 50 52-0389		**F-Can High Intensity Discharge (HID) Ballasts** *(26 01 50 52-0362)*		
26 01 50 52-0390		**Metal Halide, F-Can High Intensity Discharge (HID) Ballasts** *(26 01 50 52-0389)*		
26 01 50 52-0391	EA	1 Lamp, 70 Watt Metal Halide, 120/277 Volt, F-Can High Intensity Discharge (HID) Ballast	332.45	28.32
		For Pulse Start Ballast, Add	*29.28*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0392	EA	1 Lamp, 100 Watt Metal Halide, 120/277 Volt, F-Can High Intensity Discharge (HID) Ballast	351.82	28.32
		For Pulse Start Ballast, Add	*31.22*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0393	EA	1 Lamp, 175 Watt Metal Halide, 120/277 Volt, F-Can High Intensity Discharge (HID) Ballast	317.79	28.32
		For Pulse Start Ballast, Add	*27.81*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0394	EA	1 Lamp, 250 Watt Metal Halide, 120/277 Volt, F-Can High Intensity Discharge (HID) Ballast	373.71	28.32
		For Pulse Start Ballast, Add	*33.41*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0395	EA	1 Lamp, 400 Watt Metal Halide, 120/277 Volt, F-Can High Intensity Discharge (HID) Ballast	530.43	28.32
		For Pulse Start Ballast, Add	*49.08*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0396		**High Pressure Sodium, F-Can High Intensity Discharge (HID) Ballasts** *(26 01 50 52-0389)*		
26 01 50 52-0397	EA	1 Lamp, 70 Watt High Pressure Sodium, 120/277 Volt, F-Can High Intensity Discharge (HID) Ballast	405.84	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0398	EA	1 Lamp, 100 Watt High Pressure Sodium, 120/277 Volt, F-Can High Intensity Discharge (HID) Ballast	436.03	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0399		**Postline High Intensity Discharge (HID) Ballasts** *(26 01 50 52-0362)*		
26 01 50 52-0400		**Metal Halide, Postline High Intensity Discharge (HID) Ballasts** *(26 01 50 52-0399)*		
26 01 50 52-0401	EA	1 Lamp, 50 Watt Metal Halide, 120 Volt, Postline High Intensity Discharge (HID) Ballast	695.25	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0402		**High Pressure Sodium, Postline High Intensity Discharge (HID) Ballasts** *(26 01 50 52-0399)*		
26 01 50 52-0403	EA	1 Lamp, 70 Watt High Pressure Sodium, 120 Volt, Postline High Intensity Discharge (HID) Ballast	1,087.24	28.25
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.87*	
26 01 50 52-0404	EA	1 Lamp, 100 Watt High Pressure Sodium, 120 Volt, Postline High Intensity Discharge (HID) Ballast	1,215.93	28.25
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.87*	
26 01 50 52-0405	EA	1 Lamp, 150 Watt High Pressure Sodium, 120 Volt, Postline High Intensity Discharge (HID) Ballast	1,171.41	28.25
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.87*	
26 01 50 52-0406		**Indoor Enclosed High Intensity Discharge (HID) Ballasts** *(26 01 50 52-0362)*		
26 01 50 52-0407		**Metal Halide, Indoor Enclosed High Intensity Discharge (HID) Ballasts** *(26 01 50 52-0406)*		
26 01 50 52-0408	EA	1 Lamp, 175 Watt Metal Halide, 120/277 Volt, Indoor Enclosed High Intensity Discharge (HID) Ballast	862.89	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0409	EA	1 Lamp, 250 Watt Metal Halide, 120/277 Volt, Indoor Enclosed High Intensity Discharge (HID) Ballast	983.40	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0410	EA	1 Lamp, 400 Watt Metal Halide, 120/277 Volt, Indoor Enclosed High Intensity Discharge (HID) Ballast	1,308.39	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0411	EA	1 Lamp, 400 Watt Metal Halide, 480 Volt, Indoor Enclosed High Intensity Discharge (HID) Ballast	1,301.39	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0412	EA	2 Lamp, 400 Watt Metal Halide, 120/277 Volt, Indoor Enclosed High Intensity Discharge (HID) Ballast	1,833.57	30.59
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*12.58*	
26 01 50 52-0413	EA	2 Lamp, 400 Watt Metal Halide, 480 Volt, Indoor Enclosed High Intensity Discharge (HID) Ballast	1,833.57	30.59
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*12.58*	
26 01 50 52-0414	EA	1 Lamp, 1,000 Watt Metal Halide, 120/277 Volt, Indoor Enclosed High Intensity Discharge (HID) Ballast	1,253.58	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0415	EA	1 Lamp, 1,000 Watt Metal Halide, 480 Volt, Indoor Enclosed High Intensity Discharge (HID) Ballast	1,480.08	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0416		**High Pressure Sodium, Indoor Enclosed High Intensity Discharge (HID) Ballasts** *(26 01 50 52-0406)*		
26 01 50 52-0417	EA	1 Lamp, 400 Watt High Pressure Sodium, 120/277 Volt, Indoor Enclosed High Intensity Discharge (HID) Ballast	1,635.82	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0418	EA	1 Lamp, 400 Watt High Pressure Sodium, 480 Volt, Indoor Enclosed High Intensity Discharge (HID) Ballast	1,556.00	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0419	EA	1 Lamp, 1,000 Watt High Pressure Sodium, 120/277 Volt, Indoor Enclosed High Intensity Discharge (HID) Ballast	2,008.58	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 50 52-0420	EA	1 Lamp, 1,000 Watt High Pressure Sodium, 480 Volt, Indoor Enclosed High Intensity Discharge (HID) Ballast	2,008.58	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	

26 01 50 52-0421 Outdoor Weatherproof High Intensity Discharge (HID) Ballasts *(26 01 50 52-0362)*

26 01 50 52-0422 Metal Halide, Outdoor Weatherproof High Intensity Discharge (HID) Ballasts *(26 01 50 52-0421)*

26 01 50 52-0423	EA	1 Lamp, 175 Watt Metal Halide, 120/277 Volt, Outdoor Weatherproof High Intensity Discharge (HID) Ballast	973.32	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0424	EA	1 Lamp, 250 Watt Metal Halide, 120/277 Volt, Outdoor Weatherproof High Intensity Discharge (HID) Ballast	1,053.75	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0425	EA	1 Lamp, 400 Watt Metal Halide, 120/277 Volt, Outdoor Weatherproof High Intensity Discharge (HID) Ballast	1,045.83	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0426	EA	1 Lamp, 400 Watt Metal Halide, 480 Volt, Outdoor Weatherproof High Intensity Discharge (HID) Ballast	1,099.71	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0427	EA	2 Lamp, 400 Watt Metal Halide, 120/277 Volt, Outdoor Weatherproof High Intensity Discharge (HID) Ballast	1,763.31	30.59
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*12.58*	
26 01 50 52-0428	EA	2 Lamp, 400 Watt Metal Halide, 480 Volt, Outdoor Weatherproof High Intensity Discharge (HID) Ballast	2,174.78	30.59
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*12.58*	
26 01 50 52-0429	EA	1 Lamp, 1,000 Watt Metal Halide, 120/277 Volt, Outdoor Weatherproof High Intensity Discharge (HID) Ballast	1,645.18	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0430	EA	1 Lamp, 1,000 Watt Metal Halide, 480 Volt, Outdoor Weatherproof High Intensity Discharge (HID) Ballast	1,495.15	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	

26 01 50 52-0431 High Pressure Sodium, Outdoor Weatherproof High Intensity Discharge (HID) Ballasts *(26 01 50 52-0421)*

26 01 50 52-0432	EA	1 Lamp, 400 Watt High Pressure Sodium, 120/277 Volt, Outdoor Weatherproof High Intensity Discharge (HID) Ballast	1,265.17	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0433	EA	1 Lamp, 400 Watt High Pressure Sodium, 480 Volt, Outdoor Weatherproof High Intensity Discharge (HID) Ballast	1,366.62	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0434	EA	1 Lamp, 1,000 Watt High Pressure Sodium, 120/277 Volt, Outdoor Weatherproof High Intensity Discharge (HID) Ballast	2,055.41	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0435	EA	1 Lamp, 1,000 Watt High Pressure Sodium, 480 Volt, Outdoor Weatherproof High Intensity Discharge (HID) Ballast	1,764.39	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	

26 01 50 52-0436 Electronic High Intensity Discharge (HID) Ballasts *(26 01 50 52-0361)*

26 01 50 52-0437 Electronic Low Frequency High Intensity Discharge (HID) Ballasts *(26 01 50 52-0436)*

26 01 50 52-0438	EA	1 Lamp, 70 Watt Metal Halide, 120/277 Volt, Electronic Low Frequency High Intensity Discharge (HID) Ballast	371.02	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0439	EA	1 Lamp, 100 Watt Metal Halide, 120/277 Volt, Electronic Low Frequency High Intensity Discharge (HID) Ballast	371.02	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0440	EA	1 Lamp, 150 Watt Metal Halide, 120/277 Volt, Electronic Low Frequency High Intensity Discharge (HID) Ballast	421.88	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0441	EA	1 Lamp, 250 Watt Metal Halide, 120/277 Volt, Electronic Low Frequency High Intensity Discharge (HID) Ballast	1,134.40	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0442	EA	1 Lamp, 300 Watt Metal Halide, 120/277 Volt, Electronic Low Frequency High Intensity Discharge (HID) Ballast	1,134.40	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0443	EA	1 Lamp, 320 Watt Metal Halide, 120/277 Volt, Electronic Low Frequency High Intensity Discharge (HID) Ballast	1,134.40	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0444	EA	1 Lamp, 350 Watt Metal Halide, 120/277 Volt, Electronic Low Frequency High Intensity Discharge (HID) Ballast	1,134.40	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0445	EA	1 Lamp, 400 Watt Metal Halide, 120/277 Volt, Electronic Low Frequency High Intensity Discharge (HID) Ballast	1,134.40	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	

26 01 50 52-0446 Owner Supplied Ballasts *(26 01 50 52-0001)*

26 01 50 52-0447	EA	Install Owner Supplied, 1 Lamp Fluorescent Ballast	22.67	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 01 50 52-0448	EA	Install Owner Supplied, 2 Lamp Fluorescent Ballast	28.32	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 01 50 52-0449	EA	Install Owner Supplied, 3 Lamp Fluorescent Ballast	32.86	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.86*	
26 01 50 52-0450	EA	Install Owner Supplied, 4 Lamp Fluorescent Ballast	35.12	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.54*	
26 01 50 52-0451	EA	Install Owner Supplied, 1 Lamp High Intensity Discharge (HID) Ballast	39.66	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.90*	
26 01 50 52-0452	EA	Install Owner Supplied, 2 Lamp High Intensity Discharge (HID) Ballast	41.93	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*12.58*	

26 01 50 53 Lens and Accessory Replacement *(26 01 50)*

26 01 50 53-0001 Lens and Accessory Replacement *(26 01 50 53)*

26 01 50 53-0002	EA	Removal And Replacement Of Parabolic Aluminum Louver	84.28
26 01 50 53-0003	EA	Removal And Replacement Of Visor For Fixtures	181.62
26 01 50 53-0004	EA	Removal And Replacement Of Globe On Pole	209.03

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 50 53-0005	EA	Removal And Replacement Of Lenses For Flat Top Pole Fixtures	86.18	
26 01 50 53-0006	EA	Removal And Replacement Of 1' x 4' Diffuser With 0.125" Thick Prismatic Acrylic Diffuser	29.32	
26 01 50 53-0007	EA	Removal And Replacement Of 2' x 2' Diffuser With 0.125" Thick Prismatic Acrylic Diffuser	30.40	
26 01 50 53-0008	EA	Removal And Replacement Of 2' x 4' Diffuser With 0.125" Thick Prismatic Acrylic Diffuser	35.08	
26 01 50 53-0009	EA	Removal And Replacement Of Slide-On Lampholder	12.99	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.39*	
26 01 50 53-0010	EA	Removal And Replacement Of Screw Mount Lampholder	13.16	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.39*	
26 01 50 53-0011	EA	Removal And Replacement Of Medium Bi-Pin Lampholder	14.59	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.39*	
26 01 50 53-0012	EA	Removal And Replacement Of Fixed High Output Lampholder, Recessed, Double Contact Double Pedestal Type	16.78	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.39*	
26 01 50 53-0013	EA	Removal And Replacement Of Plunger High Output Lampholder, Recessed, Double Contact Double Pedestal Type	18.21	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.39*	
26 01 50 53-0014	EA	Removal And Replacement Of Compact Twin-Tube Lampholder, Snap-in	14.37	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.39*	
26 01 50 53-0015	EA	Removal And Replacement Of Exterior Light Globes	54.93	

26 01 50 81 Luminaire Replacement *(26 01 50)*

26 01 50 81-0001 Retrofit Lighting Fixtures *(26 01 50 81)*

26 01 50 81-0002 LED Lighting Retrofits For Existing Fixtures *(26 01 50 81-0001)*

26 01 50 81-0003 LED Lighting Retrofits For Existing Downlight Fixtures (GreenCreative) *(26 01 50 81-0002)*

Note: Includes removing existing lamps and disconnecting existing ballast. Includes installing adaptor frame, LED light panel, dimming driver and trim. Excludes recycling or disposal of lamps and ballasts. See CSI section 02 84 16 00-0003 for ballast recycling.

26 01 50 81-0004	EA	7" Round Downlight, 15 Watt, 2700K CCT, LED Retrofit (GreenCreative 15SMPR7DIM/927)	105.86
26 01 50 81-0005	EA	7" Round Downlight, 15 Watt, 3000K CCT, LED Retrofit (GreenCreative 15SMPR7DIM/930)	105.86
26 01 50 81-0006	EA	7" Round Downlight, 15 Watt, 4000K CCT, LED Retrofit (GreenCreative 15SMPR7DIM/940)	105.86
26 01 50 81-0007	EA	4" Diameter, 8.5 Watt, 2700K CCT, THINFIT LED Downlight, (GreenCreative 8.5DLNC4DIM/827)	86.49
26 01 50 81-0008	EA	4" Diameter, 8.5 Watt, 3000K CCT, THINFIT LED Downlight, (GreenCreative 8.5DLNC4DIM/830)	86.49
26 01 50 81-0009	EA	4" Diameter, 8.5 Watt, 4000K CCT, THINFIT LED Downlight, (GreenCreative 8.5DLNC4DIM/840)	86.49
26 01 50 81-0010	EA	6" Diameter, 11.6 Watt, 2700K CCT, THINFIT LED Downlight, (GreenCreative 11.6DLNC6DIM/827)	94.65
26 01 50 81-0011	EA	6" Diameter, 11.6 Watt, 3000K CCT, THINFIT LED Downlight, (GreenCreative 11.6DLNC6DIM/830)	94.65
26 01 50 81-0012	EA	6" Diameter, 11.6 Watt, 4000K CCT, THINFIT LED Downlight, (GreenCreative 11.6DLNC6DIM/840)	94.65

26 01 50 81-0013 LED Lighting Retrofits For Existing Site Fixtures (Daylight Technology) *(26 01 50 81-0002)*

Note: Includes removing existing lamps and disconnecting existing ballast. Includes installing adaptor frame, LED light panel, dimming driver and trim. Excludes recycling or disposal of lamps and ballasts. See CSI section 02 84 16 00-0003 for ballast recycling.

26 01 50 81-0014	EA	2,300 Lumens, 23 Watt, LED Site Retrofit Plate (Daylight Technology DL-S-20w)	313.38
26 01 50 81-0015	EA	3,300 Lumens, 33 Watt, LED Site Retrofit Plate (Daylight Technology DL-S-30w)	325.62
26 01 50 81-0016	EA	4,400 Lumens, 44 Watt, LED Site Retrofit Plate (Daylight Technology DL-S-40w)	337.86
26 01 50 81-0017	EA	5,400 Lumens, 54 Watt, LED Site Retrofit Plate (Daylight Technology DL-S-50w)	352.35
26 01 50 81-0018	EA	6,500 Lumens, 65 Watt, LED Site Retrofit Plate (Daylight Technology DL-S-60w)	388.04
26 01 50 81-0019	EA	7,600 Lumens, 75 Watt, LED Site Retrofit Plate (Daylight Technology DL-S-70w)	402.54
26 01 50 81-0020	EA	8,600 Lumens, 86 Watt, LED Site Retrofit Plate (Daylight Technology DL-S-80w)	436.19
26 01 50 81-0021	EA	9,600 Lumens, 96 Watt, LED Site Retrofit Plate (Daylight Technology DL-S-90w)	448.43
26 01 50 81-0022	EA	10,700 Lumens, 107 Watt, LED Site Retrofit Plate (Daylight Technology DL-S-100w)	462.92
26 01 50 81-0023	EA	11,700 Lumens, 117 Watt, LED Site Retrofit Plate (Daylight Technology DL-S-110w)	485.35
26 01 50 81-0024	EA	12,800 Lumens, 128 Watt, LED Site Retrofit Plate (Daylight Technology DL-S-120w)	509.03
26 01 50 81-0025	EA	13,800 Lumens, 138 Watt, LED Site Retrofit Plate (Daylight Technology DL-S-130w)	532.48
26 01 50 81-0026	EA	14,900 Lumens, 149 Watt, LED Site Retrofit Plate (Daylight Technology DL-S-140w)	544.72
26 01 50 81-0027	EA	16,100 Lumens, 161 Watt, LED Site Retrofit Plate (Daylight Technology DL-S-150w)	565.11
26 01 50 81-0028	EA	17,200 Lumens, 172 Watt, LED Site Retrofit Plate (Daylight Technology DL-S-160w)	588.90
26 01 50 81-0029	EA	18,200 Lumens, 182 Watt, LED Site Retrofit Plate (Daylight Technology DL-S-170w)	614.39
26 01 50 81-0030	EA	19,300 Lumens, 193 Watt, LED Site Retrofit Plate (Daylight Technology DL-S-180w)	653.14
26 01 50 81-0031	EA	20,300 Lumens, 203 Watt, LED Site Retrofit Plate (Daylight Technology DL-S-190w)	670.47
26 01 50 81-0032	EA	21,400 Lumens, 214 Watt, LED Site Retrofit Plate (Daylight Technology DL-S-200w)	700.26
26 01 50 81-0033	EA	22,400 Lumens, 224 Watt, LED Site Retrofit Plate (Daylight Technology DL-S-210w)	740.03
26 01 50 81-0034	EA	23,500 Lumens, 235 Watt, LED Site Retrofit Plate (Daylight Technology DL-S-220w)	760.43
26 01 50 81-0035	EA	24,500 Lumens, 245 Watt, LED Site Retrofit Plate (Daylight Technology DL-S-230w)	808.68
26 01 50 81-0036	EA	25,600 Lumens, 256 Watt, LED Site Retrofit Plate (Daylight Technology DL-S-240w)	853.55
26 01 50 81-0037	EA	26,600 Lumens, 266 Watt, LED Site Retrofit Plate (Daylight Technology DL-S-250w)	884.36
26 01 50 81-0038	EA	27,700 Lumens, 277 Watt, LED Site Retrofit Plate (Daylight Technology DL-S-260w)	928.21
26 01 50 81-0039	EA	28,700 Lumens, 287 Watt, LED Site Retrofit Plate (Daylight Technology DL-S-270w)	1,013.06
26 01 50 81-0040	EA	29,800 Lumens, 298 Watt, LED Site Retrofit Plate (Daylight Technology DL-S-280w)	1,023.26
26 01 50 81-0041	EA	31,900 Lumens, 319 Watt, LED Site Retrofit Plate (Daylight Technology DL-S-300w)	1,049.08

26 01 50 81-0042 LED Lighting Retrofits For Existing Fixtures (Optilumen) *(26 01 50 81-0002)*

Note: Includes removing existing lamps and disconnecting existing ballast. Includes installing adaptor frame, LED light panel, dimming driver and trim. Excludes recycling or disposal of lamps and ballasts. See CSI section 02 84 16 00-0003 for ballast recycling.

26 01 50 81-0043	EA	20 Watt, 1 x 42", 3500L CCT, LED Retrofit Kit (Optilumen RKT1418M-35) Note: Fits 1' x 4' Troffer/Strip	131.96

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 50 81-0044	EA	20 Watt, 1 x 42", 4000L CCT, LED Retrofit Kit (Optilumen RKT1418M-40) Note: Fits 1' x 4' Troffer/Strip	131.96	
26 01 50 81-0045	EA	20 Watt, 1 x 42", 5000L CCT, LED Retrofit Kit (Optilumen RKT1418M-50) Note: Fits 1' x 4' Troffer/Strip	131.96	
26 01 50 81-0046	EA	30 Watt, 2 x 42", 3500L CCT, LED Retrofit Kit (Optilumen RKT2415M-35) Note: Fits 2' x 4' Troffer/Strip	137.06	
26 01 50 81-0047	EA	2 x 42", 30 Watt, 4000K CCT, LED Retrofit Kit (Optilumen RKT2415M-40) Note: Fits 2' x 4' Troffer/Strip	137.06	
26 01 50 81-0048	EA	2 x 42", 30 Watt, 5000K CCT, LED Retrofit Kit (Optilumen RKT2415M-50) Note: Fits 2' x 4' Troffer/Strip	137.06	
26 01 50 81-0049	EA	2 x 42", 40 Watt, 3500K CCT, LED Retrofit Kit (Optilumen RKT2418M-35) Note: Fits 2' x 4' Troffer/Strip	147.25	
26 01 50 81-0050	EA	2 x 42", 40 Watt, 4000K CCT, LED Retrofit Kit (Optilumen RKT2418M-40) Note: Fits 2' x 4' Troffer/Strip	147.25	
26 01 50 81-0051	EA	2 x 42", 40 Watt, 5000K CCT, LED Retrofit Kit (Optilumen RKT2418M-50) Note: Fits 2' x 4' Troffer/Strip	147.25	
26 01 50 81-0052	EA	3 x 42", 30 Watt, 3500K CCT, LED Retrofit Kit (Optilumen RKT3415M-35) Note: Fits 2' x 4' Troffer/Strip	137.06	
26 01 50 81-0053	EA	3 x 42", 30 Watt, 4000K CCT, LED Retrofit Kit (Optilumen RKT3415M-40) Note: Fits 2' x 4' Troffer/Strip	137.06	
26 01 50 81-0054	EA	3 x 42", 30 Watt, 5000K CCT, LED Retrofit Kit (Optilumen RKT3415M-50) Note: Fits 2' x 4' Troffer/Strip	137.06	
26 01 50 81-0055	EA	3 x 42", 40 Watt, 3500K CCT, LED Retrofit Kit (Optilumen RKT3418M-35) Note: Fits 2' x 4' Troffer/Strip	147.25	
26 01 50 81-0056	EA	3 x 42", 40 Watt, 4000K CCT, LED Retrofit Kit (Optilumen RKT3418M-40) Note: Fits 2' x 4' Troffer/Strip	147.25	
26 01 50 81-0057	EA	3 x 42", 40 Watt, 5000K CCT, LED Retrofit Kit (Optilumen RKT3418M-50) Note: Fits 2' x 4' Troffer/Strip	147.25	
26 01 50 81-0058	EA	3 x 42", 60 Watt, 3500K CCT, LED Retrofit Kit (Optilumen RKT3424M-35) Note: Fits 2' x 4' Troffer/Strip	167.65	
26 01 50 81-0059	EA	3 x 42", 60 Watt, 4000K CCT, LED Retrofit Kit (Optilumen RKT3424M-40) Note: Fits 2' x 4' Troffer/Strip	167.65	
26 01 50 81-0060	EA	3 x 42", 60 Watt, 5000K CCT, LED Retrofit Kit (Optilumen RKT3424M-50) Note: Fits 2' x 4' Troffer/Strip	167.65	
26 01 50 81-0061	EA	1 x 21", 10 Watt, 3500K CCT, LED Retrofit Kit (Optilumen RKT1209M-35) Note: Fits 1' x 2' Troffer/Strip	131.96	
26 01 50 81-0062	EA	1 x 21", 10 Watt, 4000K CCT, LED Retrofit Kit (Optilumen RKT1209M-40) Note: Fits 1' x 2' Troffer/Strip	131.96	
26 01 50 81-0063	EA	1 x 21", 10 Watt, 5000K CCT, LED Retrofit Kit (Optilumen RKT1209M-50) Note: Fits 1' x 2' Troffer/Strip	131.96	
26 01 50 81-0064	EA	2 x 21", 22 Watt, 3500K CCT, LED Retrofit Kit (Optilumen RKT2209M-35) Note: Fits 2' x 2' Troffer/Strip	131.96	
26 01 50 81-0065	EA	2 x 21", 22 Watt, 4000K CCT, LED Retrofit Kit (Optilumen RKT2209M-40) Note: Fits 2' x 2' Troffer/Strip	131.96	
26 01 50 81-0066	EA	2 x 21", 22 Watt, 5000K CCT, LED Retrofit Kit (Optilumen RKT2209M-50) Note: Fits 2' x 2' Troffer/Strip	131.96	
26 01 50 81-0067	EA	3 x 21", 20 Watt, 3500K CCT, LED Retrofit Kit (Optilumen RKT3209M-35) Note: Fits 2' x 2' Troffer/Strip	137.06	
26 01 50 81-0068	EA	3 x 21", 20 Watt, 4000K CCT, LED Retrofit Kit (Optilumen RKT3209M-40) Note: Fits 2' x 2' Troffer/Strip	137.06	
26 01 50 81-0069	EA	3 x 21", 20 Watt, 5000K CCT, LED Retrofit Kit (Optilumen RKT3209M-50) Note: Fits 2' x 2' Troffer/Strip	137.06	
26 01 50 81-0070	EA	3 x 21", 30 Watt, 3500K CCT, LED Retrofit Kit (Optilumen RKT3210M-35) Note: Fits 2' x 2' Troffer/Strip	143.17	
26 01 50 81-0071	EA	3 x 21", 30 Watt, 4000K CCT, LED Retrofit Kit (Optilumen RKT3210M-40) Note: Fits 2' x 2' Troffer/Strip	143.17	
26 01 50 81-0072	EA	3 x 21", 30 Watt, 5000K CCT, LED Retrofit Kit (Optilumen RKT3210M-50) Note: Fits 2' x 2' Troffer/Strip	143.17	
26 01 50 81-0073		LED Lighting Retrofits For Existing Lay-In/Troffer Fixtures (LG) *(26 01 50 81-0002)* Note: Includes removing existing lamps and disconnecting existing ballast. Includes installing adaptor frame, LED light panel, dimming driver and trim. Excludes recycling or disposal of lamps and ballasts. See CSI section 02 84 16 00-0003 for ballast recycling.		
26 01 50 81-0074	EA	34 Watt, 3500K CCT, 2' x 4', Retrofit Troffer LED Fixture With Sensor (LG LGE-2X4RT-34-35-4400-R(W)-SN)	301.34	
26 01 50 81-0075	EA	34 Watt, 4000K CCT, 2' x 4', Retrofit Troffer LED Fixture With Sensor (LG LGE-2X4RT-34-40-4500-R(W)-SN)	301.34	
26 01 50 81-0076	EA	26 Watt, 3500K CCT, 2' x 2', Retrofit Troffer LED Fixture With Sensor (LG LGE-2X2RT-26-35-3400-R(W)-SN)	271.76	
26 01 50 81-0077	EA	26 Watt, 4000K CCT, 2' x 2', Retrofit Troffer LED Fixture With Sensor (LG LGE-2X2RT-26-40-3400-R(W)-SN)	271.76	
26 01 50 81-0078	EA	25 Watt, 3,250 Lumens, 3500K CCT, Lay-In Retrofit 2' x 2' Troffer (LG LGE-2X2SI-25-35-3200-RV) Note: No sensor, ZigBee ready driver	134.47	
26 01 50 81-0079	EA	25 Watt, 3,250 Lumens, 4000K CCT, Lay-In Retrofit 2' x 2' Troffer (LG LGE-2X2SI-25-40-3200-RV) Note: No sensor, ZigBee ready driver	134.47	
26 01 50 81-0080	EA	31 Watt, 4,050 Lumens, 3500K CCT, Lay-In Retrofit 2' x 4' Troffer (LG LGE-2X2SI-31-35-3200-RV) Note: No sensor, ZigBee ready driver	153.84	
26 01 50 81-0081	EA	31 Watt, 4,050 Lumens, 4000K CCT, Lay-In Retrofit 2' x 4' Troffer (LG LGE-2X2SI-31-40-3200-RV) Note: No sensor, ZigBee ready driver	153.84	
26 01 50 81-0082	EA	25 Watt, 3,250 Lumens, 3500K CCT, Lay-In Retrofit 2' x 2' Troffer With Sensor Connect (LG LGE-2X2SC-25-35-3200-RV) Note: Factory installed sensor and ZigBee dongle	168.12	
26 01 50 81-0083	EA	25 Watt, 3,250 Lumens, 4000K CCT, Lay-In Retrofit 2' x 2' Troffer With Sensor Connect (LG LGE-2X2SC-25-40-3200-RV) Note: Factory installed sensor and ZigBee dongle	168.12	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 50 81-0084	EA	31 Watt, 3,250 Lumens, 3500K CCT, Lay-In Retrofit 2' x 4' Troffer With Sensor Connect (LG LGE-2X2SC-31-35-3200-RV) Note: Factory installed sensor and ZigBee dongle	173.21	
26 01 50 81-0085	EA	31 Watt, 3,250 Lumens, 4000K CCT, Lay-In Retrofit 2' x 4' Troffer With Sensor Connect (LG LGE-2X2SC-31-40-3200-RV) Note: Factory installed sensor and ZigBee dongle	173.21	
26 01 50 81-0086	EA	2' x 2' 2-Board, 25 Watt, 3,120 Lumens, 3500K CCT, Retrofit Board Kits (LG LGE-2BDK-25-35-3120) Note: No sensor, ZigBee ready driver	104.89	
26 01 50 81-0087	EA	2' x 2' 2-Board, 25 Watt, 3,120 Lumens, 4000K CCT, Retrofit Board Kits (LG LGE-2BDK-25-40-3120) Note: No sensor, ZigBee ready driver	104.89	
26 01 50 81-0088	EA	2' x 4' 4-Board, 31 Watt, 3,120 Lumens, 3500K CCT, Retrofit Board Kits (LG LGE-4BDK-31-35-3880) Note: No sensor, ZigBee ready driver	117.13	
26 01 50 81-0089	EA	2' x 4' 4-Board, 31 Watt, 3,120 Lumens, 4000K CCT, Retrofit Board Kits (LG LGE-4BDK-31-40-3880) Note: No sensor, ZigBee ready driver	117.13	
26 01 50 81-0090	EA	2' x 2' 2-Board, 25 Watt, 3,120 Lumens, 3500K CCT, With Lens Retrofit Board Kits (LG LGE-2BDK-25-35-3120-L) Note: No sensor, ZigBee ready driver	107.95	
26 01 50 81-0091	EA	2' x 2' 2-Board, 25 Watt, 3,120 Lumens, 4000K CCT, With Lens Retrofit Board Kits (LG LGE-2BDK-25-40-3120-L) Note: No sensor, ZigBee ready driver	107.95	
26 01 50 81-0092	EA	2' x 4' 4-Board, 31 Watt, 3,120 Lumens, 3500K CCT, With Lens Retrofit Board Kits (LG LGE-4BDK-31-35-3880-L) Note: No sensor, ZigBee ready driver	120.19	
26 01 50 81-0093	EA	2' x 4' 4-Board, 31 Watt, 3,120 Lumens, 4000K CCT, With Lens Retrofit Board Kits (LG LGE-4BDK-31-40-3880-L) Note: No sensor, ZigBee ready driver	120.19	
26 01 50 81-0094	EA	6" Diameter, 16 Watt, 1,450 Lumens, 3500K CCT, Comm Retrofit Downlight (LG LGE-CRDL-16-35-1450) Note: No sensor, ZigBee ready driver	106.93	
26 01 50 81-0095	EA	6" Diameter, 16 Watt, 1,450 Lumens, 4000K CCT, Comm Retrofit Downlight (LG LGE-CRDL-16-40-1450) Note: No sensor, ZigBee ready driver	106.93	
26 01 50 81-0096	EA	8" Diameter, 22 Watt, 2,000 Lumens, 3500K CCT, Comm Retrofit Downlight (LG LGE-CRDL-22-35-2000) Note: No sensor, ZigBee ready driver	116.11	
26 01 50 81-0097	EA	8" Diameter, 22 Watt, 2,000 Lumens, 4000K CCT, Comm Retrofit Downlight (LG LGE-CRDL-22-40-2000) Note: No sensor, ZigBee ready driver	116.11	

26 01 50 81-0098 LED Lighting Retrofit Accessories (LG) *(26 01 50 81-0002)*

See CSI section 02 84 16 00-0003 for ballast recycling.

26 01 50 81-0099	EA	Dongle (LG LGE-DONGLE)	25.75	
26 01 50 81-0100	EA	1-group On/Off/Dim, 2-Button, Wireless Switch (LG LGE-SWITCH-BAT-2B)	141.13	12.89
26 01 50 81-0101	EA	2-group On/Off/Dim, 4-Button, Wireless Switch (LG LGE-SWITCH-BAT-4B)	146.28	15.46
26 01 50 81-0102	EA	1-group On/Off/Dim, 2-Button, AC Powered Switch (LG LGE-SWITCH-AC-2B)	182.33	12.89
26 01 50 81-0103	EA	2-group On/Off/Dim, 4-Button, AC Powered Switch (LG LGE-SWITCH-AC-4B)	187.48	15.46
26 01 50 81-0104	EA	Photo, Motion Sensor With ZigBee Dongle plugin (LG LGE-MULTI-SENSOR)	92.71	10.31
26 01 50 81-0105	EA	Tube Clip For Multi Sensor (LG LGE-TUBE-CLIP)	29.10	10.31
26 01 50 81-0106	EA	Ceiling Plate For Multi Sensor (LG LGE-CEILING-PLATE)	31.51	10.31
26 01 50 81-0107	EA	Wireless Interface Module (LG PIHN-W005A) Note: includes dongle	85.50	15.46

26 01 50 81-0108 Retrofit Existing (T12) Fluorescent Fixtures *(26 01 50 81-0001)*

Note: Excludes recycling or disposal of lamps and ballasts. See CSI section 02 84 16 00-0003 for ballast recycling, 02 84 16 00-0008 for leaking ballast disposal.

26 01 50 81-0109 Retrofit Existing (T12) Strip Style Fluorescent Fixtures Without Reflector *(26 01 50 81-0108)*

Note: Includes ballast, white reflective ballast cover, lamps, lamp holders, clips, wiring, cable connectors and cleaning of fixture.

26 01 50 81-0110	EA	Retrofit An Existing 4' (T12) Strip Style Fixture Without Reflector To Operate One 4' (T8) Lamp	105.97
		For Specular Ballast Cover, Add	*13.28*
26 01 50 81-0111	EA	Retrofit An Existing 4' (T12) Strip Style Fixture Without Reflector To Operate Two 4' (T8) Lamps	113.63
		For Specular Ballast Cover, Add	*14.82*
26 01 50 81-0112	EA	Retrofit An Existing 8' (T12) Strip Style Fixture Without Reflector To Operate Two 4' (T8) Lamps	157.41
		For Specular Ballast Cover, Add	*23.57*
26 01 50 81-0113	EA	Retrofit An Existing 8' (T12) Strip Style Fixture Without Reflector To Operate Four 4' (T8) Lamps	182.01
		For Specular Ballast Cover, Add	*28.49*

26 01 50 81-0114 Retrofit Existing (T12) Strip Style Fluorescent Fixtures With Reflector *(26 01 50 81-0108)*

Note: Includes ballast, white reflector and ballast cover, lamps, lamp holders, clips, wiring, cable connectors and cleaning of fixture.

26 01 50 81-0115	EA	Retrofit An Existing 4' (T12) Strip Style Fixture With Reflector To Operate One 4' (T8) Lamp	112.41
		For Specular Reflector, Add	*14.57*
26 01 50 81-0116	EA	Retrofit An Existing 4' (T12) Strip Style Fixture With Reflector To Operate Two 4' (T8) Lamps	120.84
		For Specular Reflector, Add	*16.26*
26 01 50 81-0117	EA	Retrofit An Existing 8' (T12) Strip Style Fixture With Reflector To Operate Two 4' (T8) Lamps	166.42
		For Specular Reflector, Add	*25.37*
26 01 50 81-0118	EA	Retrofit An Existing 8' (T12) Strip Style Fixture With Reflector To Operate Four 4' (T8) Lamps	212.73
		For Specular Reflector, Add	*34.64*

26 01 50 81-0119 Retrofit Existing (T12) Troffer Style Fluorescent Fixtures *(26 01 50 81-0108)*

Note: Includes ballast, white reflector and ballast cover, lamps, lamp holders, clips, wiring, cable connectors and cleaning of fixture.

26 01 50 81-0120	EA	Retrofit An Existing 1 x 4 (T12) Troffer Style Fixture To Operate One 4' (T8) Lamps	140.45
		For Specular Reflector, Add	*17.92*
26 01 50 81-0121	EA	Retrofit An Existing 1 x 4 (T12) Troffer Style Fixture To Operate Two 4' (T8) Lamps	148.10
		For Specular Reflector, Add	*19.45*

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 50 81-0122	EA	Retrofit An Existing 2 x 2 (T12) Troffer Style Fixture To Operate Two 2' (T8) Lamps	150.03	
		For Specular Reflector, Add	*19.84*	
26 01 50 81-0123	EA	Retrofit An Existing 2 x 2 (T12) Troffer Style Fixture To Operate Three 2' (T8) Lamps	168.42	
		For Specular Reflector, Add	*23.51*	
26 01 50 81-0124	EA	Retrofit An Existing 2 x 2 (T12) Troffer Style Fixture To Operate Four 2' (T8) Lamps	204.71	
		For Specular Reflector, Add	*30.77*	
26 01 50 81-0125	EA	Retrofit An Existing 2 x 4 (T12) Troffer Style Fixture To Operate Two 4' (T8) Lamps	155.83	
		For Specular Reflector, Add	*21.00*	
26 01 50 81-0126	EA	Retrofit An Existing 2 x 4 (T12) Troffer Style Fixture To Operate Three 4' (T8) Lamps	171.97	
		For Specular Reflector, Add	*24.22*	
26 01 50 81-0127	EA	Retrofit An Existing 2 x 4 (T12) Troffer Style Fixture To Operate Four 4' (T8) Lamps	185.59	
		For Specular Reflector, Add	*26.95*	

26 01 50 81-0128 Retrofit Existing Recessed Lay-In/Troffer Fixtures *(26 01 50 81-0001)*

26 01 50 81-0129 Fluorescent Volumetric Lighting Retrofits For Existing Recessed Lay-In/Troffer Fixtures (Lithonia) *(26 01 50 81-0128)*

Note: Includes removing existing lamps and ballast. Includes installing adaptor frame, volumetric reflectors, lamps and ballasts. Excludes recycling or disposal of lamps and ballasts. See CSI section 02 84 16 00-0003 for ballast recycling.

26 01 50 81-0130	EA	2 T8 Lamps, 0.78 Ballast Factor, 2' x 4', Volumetric Lighting Retrofit For Existing Parabolic Recessed Fluorescent Fixtures (Lithonia 2RT8R)	179.99
26 01 50 81-0131	EA	2 T8 Lamps, 0.88 Ballast Factor, 2' x 4', Volumetric Lighting Retrofit For Existing Parabolic Recessed Fluorescent Fixtures (Lithonia 2RT8R)	179.99
26 01 50 81-0132	EA	2 T8 Lamps, 1.20 Ballast Factor, 2' x 4', Volumetric Lighting Retrofit For Existing Parabolic Recessed Fluorescent Fixtures (Lithonia 2RT8R)	179.99
26 01 50 81-0133	EA	2 T8 Lamps, 0.88 Ballast Factor, Step Dimming Ballast, 2' x 4', Volumetric Lighting Retrofit For Existing Parabolic Recessed Fluorescent Fixtures (Lithonia 2RT8R)	196.51
26 01 50 81-0134	EA	2 T8 Lamps, 0.78 Ballast Factor, 2' x 4', Volumetric Lighting Retrofit For Existing Lensed Recessed Fluorescent Fixtures (Lithonia 2RT8RT)	179.99
26 01 50 81-0135	EA	2 T8 Lamps, 0.88 Ballast Factor, 2' x 4', Volumetric Lighting Retrofit For Existing Lensed Recessed Fluorescent Fixtures (Lithonia 2RT8RT)	179.99
26 01 50 81-0136	EA	2 T8 Lamps, 1.20 Ballast Factor, 2' x 4', Volumetric Lighting Retrofit For Existing Lensed Recessed Fluorescent Fixtures (Lithonia 2RT8RT)	179.99
26 01 50 81-0137	EA	2 T8 Lamps, 0.88 Ballast Factor, Step Dimming Ballast, 2' x 4', Volumetric Lighting Retrofit For Existing Lensed Recessed Fluorescent Fixtures (Lithonia 2RT8RT)	196.51
26 01 50 81-0138	EA	2 T8 Lamps, 0.78 Ballast Factor, 2' x 2', Volumetric Lighting Retrofit For Existing Parabolic Recessed Fluorescent Fixtures (Lithonia 2RT8R)	181.06
26 01 50 81-0139	EA	2 T8 Lamps, 0.88 Ballast Factor, 2' x 2', Volumetric Lighting Retrofit For Existing Parabolic Recessed Fluorescent Fixtures (Lithonia 2RT8R)	181.06
26 01 50 81-0140	EA	2 T8 Lamps, 1.20 Ballast Factor, 2' x 2', Volumetric Lighting Retrofit For Existing Parabolic Recessed Fluorescent Fixtures (Lithonia 2RT8R)	181.06
26 01 50 81-0141	EA	2 T8 Lamps, 0.88 Ballast Factor, Step Dimming Ballast, 2' x 2', Volumetric Lighting Retrofit For Existing Parabolic Recessed Fluorescent Fixtures (Lithonia 2RT8R)	197.58
26 01 50 81-0142	EA	2 T8 Lamps, 0.78 Ballast Factor, 2' x 2', Volumetric Lighting Retrofit For Existing Lensed Recessed Fluorescent Fixtures (Lithonia 2RT8RT)	181.06
26 01 50 81-0143	EA	2 T8 Lamps, 0.88 Ballast Factor, 2' x 2', Volumetric Lighting Retrofit For Existing Lensed Recessed Fluorescent Fixtures (Lithonia 2RT8RT)	181.06
26 01 50 81-0144	EA	2 T8 Lamps, 1.20 Ballast Factor, 2' x 2', Volumetric Lighting Retrofit For Existing Lensed Recessed Fluorescent Fixtures (Lithonia 2RT8RT)	181.06
26 01 50 81-0145	EA	2 T8 Lamps, 0.88 Ballast Factor, Step Dimming Ballast, 2' x 2', Volumetric Lighting Retrofit For Existing Lensed Recessed Fluorescent Fixtures (Lithonia 2RT8RT)	197.58

26 01 50 81-0146 LED Architectural Lighting Retrofits For Existing Recessed Lay-In/Troffer Fixtures (PlanLED) *(26 01 50 81-0128)*

Note: Includes adaptor frame, optical system, LEDs and driver. Excludes recycling or disposal of lamps and ballasts. See CSI section 02 84 16 00-0003 for ballast recycling.

26 01 50 81-0147	EA	2,400 Lumens, 2' x 4', LED Architectural Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (PlanLED FR3E-025)	253.08
26 01 50 81-0148	EA	4,300 Lumens, 2' x 4', LED Architectural Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (PlanLED FR3E-045)	264.31

26 01 50 81-0149 LED Architectural Lighting Retrofits For Existing Recessed Lay-In/Troffer Fixtures (Raffino™) *(26 01 50 81-0128)*

Note: Includes removing existing lamps and disconnecting existing ballast. Includes installing adaptor frame, LED light panel, dimming driver and trim. Excludes recycling or disposal of lamps and ballasts. See CSI section 02 84 16 00-0003 for ballast recycling.

26 01 50 81-0150	EA	1,800 Lumens, 1' x 4', LED Architectural Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (Raffino™ LR14-1800L)	364.83
26 01 50 81-0151	EA	2,600 Lumens, 1' x 4', LED Architectural Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (Raffino™ LR14-2700L)	373.80
26 01 50 81-0152	EA	2,200 Lumens, 2' x 2', LED Architectural Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (Raffino™ LR22-2200L)	364.83
26 01 50 81-0153	EA	3,300 Lumens, 2' x 2', LED Architectural Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (Raffino™ LR22-3300L)	373.80
26 01 50 81-0154	EA	3,300 Lumens, 2' x 4', LED Architectural Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (Raffino™ LR24-3000L)	418.65
26 01 50 81-0155	EA	4,150 Lumens, 2' x 4', LED Architectural Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (Raffino™ LR24-4000L)	432.11

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 50 81-0156	EA	5,000 Lumens, 2' x 4', LED Architectural Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (Raffino™ LR24-5000L)	463.51	
26 01 50 81-0157		**LED Architectural Lighting Retrofits For Existing Recessed Lay-In/Troffer Fixtures (Orion)** *(26 01 50 81-0128)* Note: Includes removing existing lamps and disconnecting existing ballast. Includes installing adaptor frame, LED light panel, dimming driver and trim. Excludes recycling or disposal of lamps and ballasts. See CSI section 02 84 16 00-0003 for ballast recycling.		
26 01 50 81-0158	EA	3,000 Lumens, 2' x 2', LED Architectural Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (Orion LDR-030L-FO-UNV-FDX-840-22-1P-CT-M-ST)	337.38	
26 01 50 81-0159	EA	3,500 Lumens, 2' x 2', LED Architectural Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (Orion LDR-035L-FO-UNV-FDX-840-22-1P-CT-M-ST)	349.89	
26 01 50 81-0160	EA	3,200 Lumens, 2' x 4', LED Architectural Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (Orion LDR-032L-FO-UNV-FDX-840-24-1P-CT-M-ST)	353.64	
26 01 50 81-0161	EA	3,800 Lumens, 2' x 4', LED Architectural Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (Orion LDR-038L-FO-UNV-FDX-840-24-1P-CT-M-ST)	366.15	
26 01 50 81-0162	EA	2,000 Lumens, 2' x 2', LED Architectural Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (Orion LDRE1A1UNVFDSX84022MST)	252.92	
26 01 50 81-0163	EA	4,000 Lumens, 2' x 2', LED Architectural Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (Orion LDRE1B1UNVFDSX84022MST)	258.86	
26 01 50 81-0164	EA	3,000 Lumens, 2' x 4', LED Architectural Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (Orion LDRE1D1UNVFDSX84024MST)	268.37	
26 01 50 81-0165	EA	4,000 Lumens, 2' x 4', LED Architectural Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (Orion LDRE1E1UNVFDSX84024MST)	274.31	
26 01 50 81-0166	EA	6,000 Lumens, 2' x 4', LED Architectural Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (Orion LDRE1F1UNVFDSX84024MST)	340.88	
26 01 50 81-0167	EA	8,000 Lumens, 2' x 4', LED Architectural Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (ORION LDRE1G1UNVFDSX84024MST)	407.44	
26 01 50 81-0168		**Fluorescent Direct-Indirect Louver Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (A.L.P. Lighting Components)** *(26 01 50 81-0128)* Note: Includes adaptor frame, optical system, lamps and ballasts. Excludes recycling or disposal of lamps and ballasts. See CSI section 02 84 16 00-0003 for ballast recycling.		
26 01 50 81-0169	EA	1 T5 Lamp, 2' x 2', Fluorescent Direct-Indirect Louver Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (A.L.P. Lighting Components)	297.34	
26 01 50 81-0170	EA	1 T8 Lamp, 2' x 2', Fluorescent Direct-Indirect Louver Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (A.L.P. Lighting Components)	220.86	
26 01 50 81-0171	EA	2 T5 Lamps, 2' x 2', Fluorescent Direct-Indirect Louver Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (A.L.P. Lighting Components)	305.76	
26 01 50 81-0172	EA	2 T8 Lamps, 2' x 2', Fluorescent Direct-Indirect Louver Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (A.L.P. Lighting Components)	229.20	
26 01 50 81-0173	EA	3 T5 Lamps, 2' x 2', Fluorescent Direct-Indirect Louver Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (A.L.P. Lighting Components)	320.91	
26 01 50 81-0174	EA	3 T8 Lamps, 2' x 2', Fluorescent Direct-Indirect Louver Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (A.L.P. Lighting Components)	250.36	
26 01 50 81-0175	EA	1 T5 Lamp, 2' x 4', Fluorescent Direct-Indirect Louver Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (A.L.P. Lighting Components)	353.39	
26 01 50 81-0176	EA	1 T8 Lamp, 2' x 4', Fluorescent Direct-Indirect Louver Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (A.L.P. Lighting Components)	276.70	
26 01 50 81-0177	EA	2 T5 Lamps, 2' x 4', Fluorescent Direct-Indirect Louver Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (A.L.P. Lighting Components)	361.26	
26 01 50 81-0178	EA	2 T8 Lamps, 2' x 4', Fluorescent Direct-Indirect Louver Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (A.L.P. Lighting Components)	284.65	
26 01 50 81-0179	EA	3 T5 Lamps, 2' x 4', Fluorescent Direct-Indirect Louver Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (A.L.P. Lighting Components)	376.22	
26 01 50 81-0180	EA	3 T8 Lamps, 2' x 4', Fluorescent Direct-Indirect Louver Lighting Retrofit For Existing Recessed Lay-In/Troffer Fixtures (A.L.P. Lighting Components)	305.70	
26 01 50 81-0181		**LED Volumetric Lighting Retrofit For Existing Lensed Or Parabolic Recessed Lay-In/Troffer Fixtures (Lithonia 2VTL2R/RT)** *(26 01 50 81-0128)* Note: Includes removing existing lamps and ballast. Includes installing LED light engine assembly, dimming driver and trim. Excludes recycling or disposal of lamps and ballasts. See CSI section 02 84 16 00-0003 for ballast recycling.		
26 01 50 81-0182	EA	3,300 Lumens, 2' x 2', LED Volumetric Lighting Retrofit For Existing Lensed Or Parabolic Recessed Lay-In/Troffer Fixtures (Lithonia 2VTL2R/RT)	680.28	
26 01 50 81-0183	EA	4,800 Lumens, 2' x 4', LED Volumetric Lighting Retrofit For Existing Lensed Or Parabolic Recessed Lay-In/Troffer Fixtures (Lithonia 2VTL4R/RT)	756.77	
26 01 50 81-0184		**Retrofit Existing Fluorescent Fixtures** *(26 01 50 81-0001)*		
26 01 50 81-0185		**Retrofit Existing Fluorescent Fixtures (Cree® UR)** *(26 01 50 81-0184)* Note: Fully assembled Cree® UR retrofit. Includes one lightbar retrofit and one driver retrofit. Excludes recycling or disposal of lamps and ballasts. See CSI section 02 84 16 00-0003 for ballast recycling.		
26 01 50 81-0186		**LED Lightbar Retrofit For Existing Fluorescent Fixtures (Cree® UR)** *(26 01 50 81-0185)*		
26 01 50 81-0187	EA	2' Length, 2 Pack, LED Lightbar Retrofit For Existing Fluorescent Fixtures (Cree® UR-24-35K-FD-LB-2)	90.86	
26 01 50 81-0188	EA	2' Length, 3 Pack, LED Lightbar Retrofit For Existing Fluorescent Fixtures (Cree® UR-24-35K-FD-LB-3)	127.82	
26 01 50 81-0189	EA	4' Length, 2 Pack, LED Lightbar Retrofit For Existing Fluorescent Fixtures (Cree® UR-48-35K-FD-LB-2)	109.30	
26 01 50 81-0190	EA	4' Length, 3 Pack, LED Lightbar Retrofit For Existing Fluorescent Fixtures (Cree® UR-48-35K-FD-LB-3)	155.51	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 50 81-0191		LED Driver Retrofit For Existing Fluorescent Fixtures (Cree® UR) *(26 01 50 81-0185)*		
26 01 50 81-0192	EA	3,600 Lumens, 2' Length, 2 Lightbars, Step Dimming, LED Driver Retrofit For Existing Fluorescent Fixtures (Cree® UR2-24-36L-S-FD-DR)	98.58	
26 01 50 81-0193	EA	3,600 Lumens, 2' Length, 3 Lightbars, Step Dimming, LED Driver Retrofit For Existing Fluorescent Fixtures (Cree® UR3-24-36L-S-FD-DR)	117.05	
26 01 50 81-0194	EA	3,600 Lumens, 2' Length, 2 Lightbars, 0-10V Dimming, LED Driver Retrofit For Existing Fluorescent Fixtures (Cree® UR2-24-36L-10V-FD-DR)	135.53	
26 01 50 81-0195	EA	3,600 Lumens, 2' Length, 3 Lightbars, 0-10V Dimming, LED Driver Retrofit For Existing Fluorescent Fixtures (Cree® UR3-24-36L-10V-FD-DR)	172.49	
26 01 50 81-0196	EA	4,500 Lumens, 4' Length, 2 Lightbars, Step Dimming, LED Driver Retrofit For Existing Fluorescent Fixtures (Cree® UR2-48-45L-S-FD-DR)	107.75	
26 01 50 81-0197	EA	4,500 Lumens, 4' Length, 3 Lightbars, Step Dimming, LED Driver Retrofit For Existing Fluorescent Fixtures (Cree® UR3-48-45L-S-FD-DR)	126.22	
26 01 50 81-0198	EA	4,500 Lumens, 4' Length, 2 Lightbars, 0-10V Dimming, LED Driver Retrofit For Existing Fluorescent Fixtures (Cree® UR2-48-45L-10V-FD-DR)	144.71	
26 01 50 81-0199	EA	4,500 Lumens, 4' Length, 3 Lightbars, 0-10V Dimming, LED Driver Retrofit For Existing Fluorescent Fixtures (Cree® UR3-48-45L-10V-FD-DR)	181.66	
26 01 50 81-0200		Retrofit Existing HID Fixtures *(26 01 50 81-0001)*		
26 01 50 81-0201	EA	Tear Drop LED Retrofit Kit (Holophane LTDRL2 P35S 40K AS BK TDRD 3 P)	1,543.94	
26 01 50 81-0202		LED Lighting Retrofits For Existing Fluorescent Fixtures *(26 01 50 81-0001)* Note: Excludes recycling or disposal of lamps and ballasts.		
26 01 50 81-0203		LED Lightbar Retrofit For Existing Fluorescent Fixtures (Lithonia) *(26 01 50 81-0202)*		
26 01 50 81-0204	EA	2' Length, 2 Bar, 2,000 Lumens, 3500K CCT, Lightbar Kit LED Retrofit System (Lithonia LBK 2FT 2 2000LMHE 80CRI 35K MIN10 GZT MVOLT)	111.57	
		For >25 To 50, Deduct	*-5.58*	
		For >50 To 100, Deduct	*-9.64*	
		For >100, Deduct	*-16.24*	
26 01 50 81-0205	EA	2' Length, 4 Bar, 8,000 Lumens, 3500K CCT, Lightbar Kit LED Retrofit System (Lithonia LBK 2FT 4 8000LMHE 80CRI MIN10 GZT MVOLT)	163.62	
		For >25 To 50, Deduct	*-8.18*	
		For >50 To 100, Deduct	*-13.54*	
		For >100, Deduct	*-21.45*	
26 01 50 81-0206	EA	3' Length, 2 Bar, 4,000 Lumens, 3500K CCT, Lightbar Kit LED Retrofit System (Lithonia LBK 3FT 2 4000LMHE 80CRI 35K MIN10 GZT MVOLT)	121.46	
		For >25 To 50, Deduct	*-6.07*	
		For >50 To 100, Deduct	*-10.45*	
		For >100, Deduct	*-17.51*	
26 01 50 81-0207	EA	3' Length, 1 Bar, 1,600 Lumens, 3500K CCT, Lightbar Kit LED Retrofit System (Lithonia LBK 3FT 1 1600LMHE 80CRI 35K MIN10 GZT MVOLT)	111.30	
		For >25 To 50, Deduct	*-5.57*	
		For >50 To 100, Deduct	*-9.69*	
		For >100, Deduct	*-16.50*	
26 01 50 81-0208	EA	4' Length, 2 Bar, 6,000 Lumens, 3500K CCT, Lightbar Kit LED Retrofit System (Lithonia LBK 4FT 2 6000LMHE 80CRI 35K MIN10 GZT MVOLT)	146.72	
		For >25 To 50, Deduct	*-7.34*	
		For >50 To 100, Deduct	*-12.42*	
		For >100, Deduct	*-20.32*	
26 01 50 81-0209	EA	4' Length, 4 Bar, 6,000 Lumens, 3500K CCT, Lightbar Kit LED Retrofit System (Lithonia LBK 4FT 4 6000LMHE 80CRI 35K MIN10 GZT MVOLT)	191.83	
		For >25 To 50, Deduct	*-9.59*	
		For >50 To 100, Deduct	*-15.80*	
		For >100, Deduct	*-24.83*	
26 01 50 81-0210	EA	4' Length, 1 Bar, 3,000 Lumens, 3500K CCT, Lightbar Kit LED Retrofit System (Lithonia LBK 4FT 1 3000LMHE 80CRI 35K MIN10 GZT MVOLT)	120.40	
		For >25 To 50, Deduct	*-6.02*	
		For >50 To 100, Deduct	*-10.44*	
		For >100, Deduct	*-17.69*	
26 01 50 81-0211	EA	4' Length, 1 Bar, 4,000 Lumens, 3500K CCT, Lightbar Kit LED Retrofit System (Lithonia LBK 4FT 1 4000LMHE 80CRI 35K MIN10 GZT MVOLT)	120.40	
		For >25 To 50, Deduct	*-6.02*	
		For >50 To 100, Deduct	*-10.44*	
		For >100, Deduct	*-17.69*	
26 01 50 81-0212	EA	4' Length, 4 Bar, 8,000 Lumens, 3500K CCT, Lightbar Kit LED Retrofit System (Lithonia LBK 4FT 4 8000LMHE 80CRI 35K MIN10 GZT MVOLT)	155.74	
		For >25 To 50, Deduct	*-7.79*	
		For >50 To 100, Deduct	*-13.09*	
		For >100, Deduct	*-21.22*	
26 01 50 81-0213	EA	4' Length, 2 Bar, 4,000 Lumens, 3500K CCT, Lightbar Kit LED Retrofit System (Lithonia LBK 4FT 2 4000LMHE 80CRI 35K MIN10 GZT MVOLT)	131.68	
		For >25 To 50, Deduct	*-6.58*	
		For >50 To 100, Deduct	*-11.29*	
		For >100, Deduct	*-18.82*	
26 01 50 81-0214	EA	4' Length, 2 Bar, 3,000 Lumens, 3500K CCT, Lightbar Kit LED Retrofit System (Lithonia LBK 4FT 2 3000LMHE 80CRI 35K MIN10 GZT MVOLT)	131.68	
		For >25 To 50, Deduct	*-6.58*	
		For >50 To 100, Deduct	*-11.29*	
		For >100, Deduct	*-18.82*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 50 81-0215		**LED Retrofit For Existing Fluorescent Fixtures (Lithonia)** *(26 01 50 81-0202)*		
26 01 50 81-0216	EA	1'x 4', 4,000 Lumens, 3500K CCT, Square Smooth Diffuser, Dimming LED Relight Assembly (Lithonia BLT4R F 40LHE SDSMT MVOLT EZ1 LP835 NLTAIR2)	269.68	
		For nLight AIR PIR integral occupancy sensor with automatic dimming photocell for Networking Capabilities Individual Control (nLight RES7), Add	*179.91*	
		For nLight AIR radio module without sensor (nLight RIO), Add	*116.95*	
		For >25 To 50, Deduct	*-13.48*	
		For >50 To 100, Deduct	*-21.64*	
		For >100, Deduct	*-32.62*	
26 01 50 81-0217	EA	1'x 4', 4,800 Lumens, 3500K CCT, Curved Smooth Diffuser, Dimming LED Relight Assembly (Lithonia BLT4R 48LHE ADSMT MVOLT EZ1 LP835 NLTAIR2)	291.02	
		For nLight AIR PIR integral occupancy sensor with automatic dimming photocell for Networking Capabilities Individual Control (nLight RES7), Add	*179.91*	
		For nLight AIR radio module without sensor (nLight RIO), Add	*116.95*	
		For >25 To 50, Deduct	*-14.55*	
		For >50 To 100, Deduct	*-23.24*	
		For >100, Deduct	*-34.75*	
26 01 50 81-0218	EA	2'x 2', 3,300 Lumens, 3500K CCT, Square Smooth Diffuser, Dimming LED Relight Assembly (Lithonia 2BLT2R 33LHE SDSMT MVOLT EZ1 LP835 NLTAIR2)	306.97	
		For nLight AIR PIR integral occupancy sensor with automatic dimming photocell for Networking Capabilities Individual Control (nLight RES7), Add	*179.91*	
		For nLight AIR radio module without sensor (nLight RIO), Add	*116.95*	
		For >25 To 50, Deduct	*-15.35*	
		For >50 To 100, Deduct	*-24.44*	
		For >100, Deduct	*-36.35*	
26 01 50 81-0219	EA	2'x 2', 4,000 Lumens, 3500K CCT, Square Smooth Diffuser, Dimming LED Relight Assembly (Lithonia 2BLT2R F 40LHE SDSMT MVOLT EZ1 LP835 NLTAIR2)	331.89	
		For nLight AIR PIR integral occupancy sensor with automatic dimming photocell for Networking Capabilities Individual Control (nLight RES7), Add	*179.91*	
		For nLight AIR radio module without sensor (nLight RIO), Add	*116.95*	
		For >25 To 50, Deduct	*-16.59*	
		For >50 To 100, Deduct	*-26.30*	
		For >100, Deduct	*-38.84*	
26 01 50 81-0220	EA	2'x 4', 4,000 Lumens, 3500K CCT, Curved Smooth Diffuser, Dimming LED Relight Assembly (Lithonia 2BLT4R 40LHE ADSMT MVOLT EZ1 LP835 NLTAIR2 RIO)	355.46	
		For nLight AIR PIR integral occupancy sensor with automatic dimming photocell for Networking Capabilities Individual Control (nLight RES7), Add	*179.91*	
		For nLight AIR radio module without sensor (nLight RIO), Add	*116.95*	
		For >25 To 50, Deduct	*-17.77*	
		For >50 To 100, Deduct	*-28.35*	
		For >100, Deduct	*-42.33*	
26 01 50 81-0221	EA	2'x 4', 4,800 Lumens, 3500K CCT, Curved Smooth Diffuser, Dimming LED Relight Assembly (Lithonia 2BLT4R 48LHE ADSMT MVOLT EZ1 LP835 NLTAIR2 RIO)	384.40	
		For nLight AIR PIR integral occupancy sensor with automatic dimming photocell for Networking Capabilities Individual Control (nLight RES7), Add	*179.91*	
		For nLight AIR radio module without sensor (nLight RIO), Add	*116.95*	
		For >25 To 50, Deduct	*-19.22*	
		For >50 To 100, Deduct	*-30.53*	
		For >100, Deduct	*-45.22*	
26 01 50 81-0222		**LED Lighting Retrofits For Existing Fluorescent Fixtures (ELED Lights)** *(26 01 50 81-0202)*		
		Note: Includes removal of existing fluorescent lamps, installing LED strip lighting and trim. Excludes recycling or disposal of lamps. See CSI section 02 84 16 00-0003 for ballast recycling.		
26 01 50 81-0223	EA	2' Dimmable, 20 Watts, 2,900 Lumens, 4000K, Magnetic Linear LED Retrofit Kit (ELEDLIGHTS 2X2STRPD20W40)	105.15	
		Note: Kit contains two 2-foot magnetic linear LED strips, connectors, and magnetic-mount LED driver		
		For >25 To 50, Deduct	*-5.26*	
		For >50 To 100, Deduct	*-9.16*	
		For >100, Deduct	*-15.60*	
26 01 50 81-0224	EA	2' Dimmable, 20 Watts, 2,900 Lumens, 5000K, Magnetic Linear LED Retrofit Kit (ELEDLIGHTS 2X2STRPD20W50)	105.15	
		Note: Kit contains two 2-foot magnetic linear LED strips, connectors, and magnetic-mount LED driver		
		For >25 To 50, Deduct	*-5.26*	
		For >50 To 100, Deduct	*-9.16*	
		For >100, Deduct	*-15.60*	
26 01 50 81-0225	EA	4' Dimmable, 32 Watts, 5,000 Lumens, 4000K, Magnetic Linear LED Retrofit Kit (ELEDLIGHTS 2X4STRPD32W40)	139.88	
		Note: Kit contains two 4-foot magnetic linear LED strips, connectors, and magnetic-mount LED driver		
		For >25 To 50, Deduct	*-6.99*	
		For >50 To 100, Deduct	*-11.90*	
		For >100, Deduct	*-19.64*	
26 01 50 81-0226	EA	4' Dimmable, 32 Watts, 5,000 Lumens, 5000K, Magnetic Linear LED Retrofit Kit (ELEDLIGHTS 2X4STRPD32W50)	139.88	
		Note: Kit contains two 4-foot magnetic linear LED strips, connectors, and magnetic-mount LED driver		
		For >25 To 50, Deduct	*-6.99*	
		For >50 To 100, Deduct	*-11.90*	
		For >100, Deduct	*-19.64*	
26 01 50 81-0227	EA	4' Dimmable, 35 Watts, 5,500 Lumens, 3000K, Magnetic Linear LED Retrofit Kit (ELEDLIGHTS 4STRPUSA035UN30)	140.00	
		Note: Kit contains four 2-foot magnetic linear LED strips, connectors, and magnetic-mount LED driver		
		For >25 To 50, Deduct	*-7.00*	
		For >50 To 100, Deduct	*-11.91*	
		For >100, Deduct	*-19.65*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 50 81-0228	EA	4' Dimmable, 35 Watts, 5,500 Lumens, 3000K, Frosted Lens, Magnetic Linear LED Retrofit Kit (ELEDLIGHTS 4STRPUSA035UN30F)	153.38	
		Note: Kit contains four 2-foot magnetic linear LED strips, frosted lens covers, connectors, and magnetic-mount LED driver		
		For >25 To 50, Deduct	*-7.67*	
		For >50 To 100, Deduct	*-12.92*	
		For >100, Deduct	*-20.99*	
26 01 50 81-0229	EA	4' Dimmable, 35 Watts, 5500 Lumens, 3500K, Magnetic Linear LED Retrofit Kit (ELEDLIGHTS 4STRPUSA035UN35)	140.00	
		Note: Kit contains four 2-foot magnetic linear LED strips, connectors, and magnetic-mount LED driver		
		For >25 To 50, Deduct	*-7.00*	
		For >50 To 100, Deduct	*-11.91*	
		For >100, Deduct	*-19.65*	
26 01 50 81-0230	EA	4' Dimmable, 35 Watts, 5500 Lumens, 3500K, Frosted Lens, Magnetic Linear LED Retrofit Kit (ELEDLIGHTS 4STRPUSA035UN35F)	153.38	
		Note: Kit contains four 2-foot magnetic linear LED strips, frosted lens covers, connectors, and magnetic-mount LED driver		
		For >25 To 50, Deduct	*-7.67*	
		For >50 To 100, Deduct	*-12.92*	
		For >100, Deduct	*-20.99*	
26 01 50 81-0231	EA	4' Dimmable, 35 Watts, 5,500 Lumens, 4000K, Magnetic Linear LED Retrofit Kit (ELEDLIGHTS 4STRPUSA035UN40)	140.00	
		Note: Kit contains four 2-foot magnetic linear LED strips, connectors, and magnetic-mount LED driver		
		For >25 To 50, Deduct	*-7.00*	
		For >50 To 100, Deduct	*-11.91*	
		For >100, Deduct	*-19.65*	
26 01 50 81-0232	EA	4' Dimmable, 35 Watts, 5,500 Lumens, 4000K, Frosted Lens, Magnetic Linear LED Retrofit Kit (ELEDLIGHTS 4STRPUSA035UN40F)	153.38	
		Note: Kit contains four 2-foot magnetic linear LED strips, frosted lens covers, connectors, and magnetic-mount LED driver		
		For >25 To 50, Deduct	*-7.67*	
		For >50 To 100, Deduct	*-12.92*	
		For >100, Deduct	*-20.99*	
26 01 50 81-0233	EA	4' Dimmable, 35 Watts, 5,500 Lumens, 5000K, Magnetic Linear LED Retrofit Kit (ELEDLIGHTS 4STRPUSA035UN50)	140.00	
		Note: Kit contains four 2-foot magnetic linear LED strips, connectors, and magnetic-mount LED driver		
		For >25 To 50, Deduct	*-7.00*	
		For >50 To 100, Deduct	*-11.91*	
		For >100, Deduct	*-19.65*	
26 01 50 81-0234	EA	4' Dimmable, 35 Watts, 5,500 Lumens, 5000K, Frosted Lens, Magnetic Linear LED Retrofit Kit (ELEDLIGHTS 4STRPUSA035UN50F)	153.38	
		Note: Kit contains four 2-foot magnetic linear LED strips, frosted lens covers, connectors, and magnetic-mount LED driver		
		For >25 To 50, Deduct	*-7.67*	
		For >50 To 100, Deduct	*-12.92*	
		For >100, Deduct	*-20.99*	
26 01 50 81-0235	EA	4' Dimmable, 46 Watts, 6,800 Lumens, 5000K, Ultra High Lumen Magnetic Linear LED Retrofit Kit (ELEDLIGHTS 2X4STRPD46W50)	153.26	
		Note: Kit contains two 4-foot magnetic linear LED strips, connectors, and magnetic-mount LED driver		
		For >25 To 50, Deduct	*-7.66*	
		For >50 To 100, Deduct	*-12.91*	
		For >100, Deduct	*-20.98*	
26 01 50 81-0236	EA	4' Dimmable, 31 Watts, 5,730 Lumens, 4000K, High Efficacy Magnetic Linear LED Retrofit Kit (ELEDLIGHTS 4C3STRP031DD40)	181.88	
		Note: Kit contains two 4-foot magnetic linear LED strips, connectors, and magnetic-mount LED driver		
		For >25 To 50, Deduct	*-9.09*	
		For >50 To 100, Deduct	*-15.05*	
		For >100, Deduct	*-23.84*	
26 01 50 81-0237	EA	4' Dimmable, 31 Watts, 5,730 Lumens, 4000K, Frosted Lens, High Efficacy Magnetic Linear LED Retrofit Kit (ELEDLIGHTS 4C3STRP031DD40F)	198.59	
		Note: Kit contains two 4-foot magnetic linear LED strips, frosted lens covers, connectors, and magnetic-mount LED driver		
		For >25 To 50, Deduct	*-9.93*	
		For >50 To 100, Deduct	*-16.31*	
		For >100, Deduct	*-25.51*	
26 01 50 81-0238	EA	4' Dimmable, 31 Watts, 5,730 Lumens, 5000K, High Efficacy Magnetic Linear LED Retrofit Kit (ELEDLIGHTS 4C3STRP031DD50)	181.88	
		Note: Kit contains two 4-foot magnetic linear LED strips, connectors, and magnetic-mount LED driver		
		For >25 To 50, Deduct	*-9.09*	
		For >50 To 100, Deduct	*-15.05*	
		For >100, Deduct	*-23.84*	
26 01 50 81-0239	EA	4' Dimmable, 31 Watts, 5,730 Lumens, 5000K, Frosted Lens, High Efficacy Magnetic Linear LED Retrofit Kit (ELEDLIGHTS 4C3STRP031DD50F)	198.59	
		Note: Kit contains two 4-foot magnetic linear LED strips, frosted lens covers, connectors, and magnetic-mount LED driver		
		For >25 To 50, Deduct	*-9.93*	
		For >50 To 100, Deduct	*-16.31*	
		For >100, Deduct	*-25.51*	
26 01 50 81-0240	EA	20 Watts, Emergency Battery Backup, For Use With 2' And 4' Linear LED Retrofit Kits (ELEDLIGHTS BLD-AM20D-480800)	203.55	
		Note: 90-minute emergency battery with DIP switch-selectable power output of 10 Watts, 15 Watts, or 20 Watts		
		For >25 To 50, Deduct	*-10.18*	
		For >50 To 100, Deduct	*-15.55*	
		For >100, Deduct	*-21.49*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 50 81-0241	EA	20 Watts, Emergency Battery Backup, For Use With 2' And 4' Linear LED Retrofit Kits (ELEDLIGHTS EM-HM-20W)	186.63	
		Note: 90-minute emergency battery with power output of 20 Watts		
		For >25 To 50, Deduct	*-9.33*	
		For >50 To 100, Deduct	*-14.28*	
		For >100, Deduct	*-19.79*	
26 01 50 81-0242	EA	8' Dimmable, 46 Watts, 7,400 Lumens, 5000K, Magnetic Linear LED Retrofit Kit (ELEDLIGHTS 4X4STRPD46W50)	181.91	
		Note: Kit contains four 4-foot magnetic linear LED strips, connectors, and magnetic-mount LED driver		
		For >25 To 50, Deduct	*-9.10*	
		For >50 To 100, Deduct	*-15.48*	
		For >100, Deduct	*-25.54*	
26 01 50 81-0243	EA	8' Dimmable, 49 Watts, 6,680 Lumens, 5000K, Frosted Lens, Magnetic Linear LED Retrofit Kit (ELEDLIGHTS 4X4STRPD49W50F)	190.27	
		Note: Kit contains four 4-foot magnetic linear LED strips, frosted lens covers, connectors, and magnetic-mount LED driver		
		For >25 To 50, Deduct	*-9.51*	
		For >50 To 100, Deduct	*-16.11*	
		For >100, Deduct	*-26.37*	
26 01 50 81-0244	EA	8' Dimmable, 64 Watts, 11,850 Lumens, 4000K, High Efficacy Magnetic Linear LED Retrofit Kit (ELEDLIGHTS 4C3STRP031DD40)	272.38	
		Note: Kit contains four 4-foot magnetic linear LED strips, connectors, and magnetic-mount LED driver		
		For >25 To 50, Deduct	*-13.62*	
		For >50 To 100, Deduct	*-22.26*	
		For >100, Deduct	*-34.58*	
26 01 50 81-0245	EA	8' Dimmable, 64 Watts, 11,850 Lumens, 4000K, Frosted Lens, High Efficacy Magnetic Linear LED Retrofit Kit (ELEDLIGHTS 4C3STRP031DD40F)	305.82	
		Note: Kit contains four 4-foot magnetic linear LED strips, frosted lens covers, connectors, and magnetic-mount LED driver		
		For >25 To 50, Deduct	*-15.29*	
		For >50 To 100, Deduct	*-24.77*	
		For >100, Deduct	*-37.93*	
26 01 50 81-0246	EA	8' Dimmable, 64 Watts, 11,850 Lumens, 5000K, High Efficacy Magnetic Linear LED Retrofit Kit (ELEDLIGHTS 4C3STRP031DD50)	272.38	
		Note: Kit contains four 4-foot magnetic linear LED strips, connectors, and magnetic-mount LED driver		
		For >25 To 50, Deduct	*-13.62*	
		For >50 To 100, Deduct	*-22.26*	
		For >100, Deduct	*-34.58*	
26 01 50 81-0247	EA	8' Dimmable, 64 Watts, 11,850 Lumens, 5000K, Frosted Lens, High Efficacy Magnetic Linear LED Retrofit Kit (ELEDLIGHTS 4C3STRP031DD50F)	305.82	
		Note: Kit contains four 4-foot magnetic linear LED strips, frosted lens covers, connectors, and magnetic-mount LED driver		
		For >25 To 50, Deduct	*-15.29*	
		For >50 To 100, Deduct	*-24.77*	
		For >100, Deduct	*-37.93*	
26 01 50 81-0248		Vapor Tight LED Retrofit Kit (ILP) *(26 01 50 81-0001)*		
		Note: 120-277 volt universal driver, 0-10 volt dimmable driver, 3000K, 3500K, 4000K or 5000K CCT. Compatible fixtures: Columbia XEM & HEM Series; LSI EG3 Series; HE Williams 96 Series; Simkar ENZ Series; Texas Fluorescents CIT Series; Atlas IFW Series; LDPI 376 Series; Daybrite DW Series; LIGHTOLIER STW.		
26 01 50 81-0249	EA	4' Length, 18 Watt, Vapor Tight LED Retrofit Kit (ILP VTR Series DLC Premium Listed)	221.30	
		For On/Off Wet Location Sensor, Add	*171.41*	
		For User Select Bi-level Dim With Occupational Sensor, Add	*197.81*	
		For Preset Bi-level Dim Sensor With Photocell, Add	*197.81*	
		For 480 Volt Or 347 Volt Step Down Transformer, Add	*49.57*	
		For Factory Installed 7 Watt LED Battery Backup, Add	*276.92*	
		For Factory Installed 10 Watt LED Battery Backup, Add	*303.31*	
		For Factory Installed 12 Watt LED Battery Backup, Add	*329.71*	
26 01 50 81-0250	EA	4' Length, 25 Watt, Vapor Tight LED Retrofit Kit (ILP VTR Series DLC Premium Listed)	223.42	
		For On/Off Wet Location Sensor, Add	*171.41*	
		For User Select Bi-level Dim With Occupational Sensor, Add	*197.81*	
		For Preset Bi-level Dim Sensor With Photocell, Add	*197.81*	
		For 480 Volt Or 347 Volt Step Down Transformer, Add	*49.57*	
		For Factory Installed 7 Watt LED Battery Backup, Add	*276.92*	
		For Factory Installed 10 Watt LED Battery Backup, Add	*303.31*	
		For Factory Installed 12 Watt LED Battery Backup, Add	*329.71*	
26 01 50 81-0251	EA	4' Length, 28 Watt, Vapor Tight LED Retrofit Kit (ILP VTR Series DLC Premium Listed)	240.62	
		For On/Off Wet Location Sensor, Add	*171.41*	
		For User Select Bi-level Dim With Occupational Sensor, Add	*197.81*	
		For Preset Bi-level Dim Sensor With Photocell, Add	*197.81*	
		For 480 Volt Or 347 Volt Step Down Transformer, Add	*49.57*	
		For Factory Installed 7 Watt LED Battery Backup, Add	*276.92*	
		For Factory Installed 10 Watt LED Battery Backup, Add	*303.31*	
		For Factory Installed 12 Watt LED Battery Backup, Add	*329.71*	
26 01 50 81-0252	EA	4' Length, 40 Watt, Vapor Tight LED Retrofit Kit (ILP VTR Series DLC Premium Listed)	242.46	
		For On/Off Wet Location Sensor, Add	*171.41*	
		For User Select Bi-level Dim With Occupational Sensor, Add	*197.81*	
		For Preset Bi-level Dim Sensor With Photocell, Add	*197.81*	
		For 480 Volt Or 347 Volt Step Down Transformer, Add	*49.57*	
		For Factory Installed 7 Watt LED Battery Backup, Add	*276.92*	
		For Factory Installed 10 Watt LED Battery Backup, Add	*303.31*	
		For Factory Installed 12 Watt LED Battery Backup, Add	*329.71*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 01 50 81-0253	EA	4' Length, 48 Watt, Vapor Tight LED Retrofit Kit (ILP VTR Series DLC Premium Listed)	250.91	
		For On/Off Wet Location Sensor, Add	*171.41*	
		For User Select Bi-level Dim With Occupational Sensor, Add	*197.81*	
		For Preset Bi-level Dim Sensor With Photocell, Add	*197.81*	
		For 480 Volt Or 347 Volt Step Down Transformer, Add	*49.57*	
		For Factory Installed 7 Watt LED Battery Backup, Add	*276.92*	
		For Factory Installed 10 Watt LED Battery Backup, Add	*303.31*	
		For Factory Installed 12 Watt LED Battery Backup, Add	*329.71*	
26 01 50 81-0254	EA	8' Length, 36 Watt, Vapor Tight LED Retrofit Kit (ILP VTR Series DLC Premium Listed)	327.40	
		For On/Off Wet Location Sensor, Add	*171.41*	
		For User Select Bi-level Dim With Occupational Sensor, Add	*197.81*	
		For Preset Bi-level Dim Sensor With Photocell, Add	*197.81*	
		For 480 Volt Or 347 Volt Step Down Transformer, Add	*49.57*	
		For Factory Installed 7 Watt LED Battery Backup, Add	*276.92*	
		For Factory Installed 10 Watt LED Battery Backup, Add	*303.31*	
		For Factory Installed 12 Watt LED Battery Backup, Add	*329.71*	
26 01 50 81-0255	EA	8' Length, 50 Watt, Vapor Tight LED Retrofit Kit (ILP VTR Series DLC Premium Listed)	346.42	
		For On/Off Wet Location Sensor, Add	*171.41*	
		For User Select Bi-level Dim With Occupational Sensor, Add	*197.81*	
		For Preset Bi-level Dim Sensor With Photocell, Add	*197.81*	
		For 480 Volt Or 347 Volt Step Down Transformer, Add	*49.57*	
		For Factory Installed 7 Watt LED Battery Backup, Add	*276.92*	
		For Factory Installed 10 Watt LED Battery Backup, Add	*303.31*	
		For Factory Installed 12 Watt LED Battery Backup, Add	*329.71*	
26 01 50 81-0256	EA	8' Length, 56 Watt, Vapor Tight LED Retrofit Kit (ILP VTR Series DLC Premium Listed)	348.50	
		For On/Off Wet Location Sensor, Add	*171.41*	
		For User Select Bi-level Dim With Occupational Sensor, Add	*197.81*	
		For Preset Bi-level Dim Sensor With Photocell, Add	*197.81*	
		For 480 Volt Or 347 Volt Step Down Transformer, Add	*49.57*	
		For Factory Installed 7 Watt LED Battery Backup, Add	*276.92*	
		For Factory Installed 10 Watt LED Battery Backup, Add	*303.31*	
		For Factory Installed 12 Watt LED Battery Backup, Add	*329.71*	
26 01 50 81-0257	EA	8' Length, 80 Watt, Vapor Tight LED Retrofit Kit (ILP VTR Series DLC Premium Listed)	350.64	
		For On/Off Wet Location Sensor, Add	*171.41*	
		For User Select Bi-level Dim With Occupational Sensor, Add	*197.81*	
		For Preset Bi-level Dim Sensor With Photocell, Add	*197.81*	
		For 480 Volt Or 347 Volt Step Down Transformer, Add	*49.57*	
		For Factory Installed 7 Watt LED Battery Backup, Add	*276.92*	
		For Factory Installed 10 Watt LED Battery Backup, Add	*303.31*	
		For Factory Installed 12 Watt LED Battery Backup, Add	*329.71*	
26 01 50 81-0258	EA	8' Length, 96 Watt, Vapor Tight LED Retrofit Kit (ILP VTR Series DLC Premium Listed)	352.72	
		For On/Off Wet Location Sensor, Add	*171.41*	
		For User Select Bi-level Dim With Occupational Sensor, Add	*197.81*	
		For Preset Bi-level Dim Sensor With Photocell, Add	*197.81*	
		For 480 Volt Or 347 Volt Step Down Transformer, Add	*49.57*	
		For Factory Installed 7 Watt LED Battery Backup, Add	*276.92*	
		For Factory Installed 10 Watt LED Battery Backup, Add	*303.31*	
		For Factory Installed 12 Watt LED Battery Backup, Add	*329.71*	

26 05 Common Work Results for Electrical *(26)*

26 05 13 Medium-Voltage Cables *(26 05)*

26 05 13 16 Medium-Voltage, Single-and Multi-Conductor Cables *(26 05 13)*

26 05 13 16-0001 Wire And Cable *(26 05 13 16)*

Note: Pulled in conduit except as noted. Includes pull wires, pulling branch circuit conductors, testing, and splicing (#8 and lighter). All conductors are copper except as otherwise noted. No special set-up is required. Excludes terminations.

26 05 13 16-0002 5 KV Cable *(26 05 13 16-0001)*

26 05 13 16-0003 Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor, 133 Percent Insulation, Installed In Duct *(26 05 13 16-0002)*

26 05 13 16-0004	MLF	#6 AWG, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor Cable, Installed In Duct	3,923.63	912.15
26 05 13 16-0005	MLF	#4 AWG, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor Cable, Installed In Duct	4,711.53	995.98
26 05 13 16-0006	MLF	#2 AWG, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor Cable, Installed In Duct	5,674.01	1,125.32
26 05 13 16-0007	MLF	1/0 AWG, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor Cable, Installed In Duct	7,422.29	1,386.43
26 05 13 16-0008	MLF	2/0 AWG, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor Cable, Installed In Duct	8,468.09	1,561.25
26 05 13 16-0009	MLF	3/0 AWG, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor Cable, Installed In Duct	10,540.82	1,732.93
26 05 13 16-0010	MLF	4/0 AWG, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor Cable, Installed In Duct	11,867.56	1,947.14
26 05 13 16-0011	MLF	250 MCM, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor Cable, Installed In Duct	14,204.68	2,166.28
26 05 13 16-0012	MLF	350 MCM, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor Cable, Installed In Duct	16,509.31	2,586.48
26 05 13 16-0013	MLF	500 MCM, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor Cable, Installed In Duct	20,991.40	3,040.34

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 13 16-0014	MLF	750 MCM, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor Cable, Installed In Duct	32,039.14	3,583.37
26 05 13 16-0015	MLF	1,000 MCM, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor Cable, Installed In Duct	43,092.54	4,126.14
26 05 13 16-0016		**Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor, 133 Percent Insulation, Direct Burial** *(26 05 13 16-0002)*		
		Note: Excludes excavation.		
26 05 13 16-0017	MLF	#6 AWG, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	3,809.62	
26 05 13 16-0018	MLF	#4 AWG, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	4,387.86	
26 05 13 16-0019	MLF	#2 AWG, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	5,026.96	
26 05 13 16-0020	MLF	1/0 AWG, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	6,336.78	
26 05 13 16-0021	MLF	2/0 AWG, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	6,945.45	
26 05 13 16-0022	MLF	3/0 AWG, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	8,802.66	
26 05 13 16-0023	MLF	4/0 AWG, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	9,593.93	
26 05 13 16-0024	MLF	250 MCM, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	11,602.41	
26 05 13 16-0025	MLF	350 MCM, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	12,970.30	
26 05 13 16-0026	MLF	500 MCM, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	16,420.29	
26 05 13 16-0027		**Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor, 133 Percent Insulation, Installed On Poles (Aerial)** *(26 05 13 16-0002)*		
26 05 13 16-0028	MLF	#6 AWG, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	3,156.04	568.10
26 05 13 16-0029	MLF	#4 AWG, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	3,843.77	609.11
26 05 13 16-0030	MLF	#2 AWG, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	4,911.77	770.28
26 05 13 16-0031	MLF	1/0 AWG, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	6,446.28	935.10
26 05 13 16-0032	MLF	2/0 AWG, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	7,487.98	1,097.72
26 05 13 16-0033	MLF	3/0 AWG, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	9,551.24	1,255.36
26 05 13 16-0034	MLF	4/0 AWG, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	10,878.23	1,456.57
26 05 13 16-0035	MLF	250 MCM, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	13,668.64	1,832.46
26 05 13 16-0036	MLF	350 MCM, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	16,217.05	2,318.63
26 05 13 16-0037	MLF	500 MCM, Cross-Linked Polyethylene (XLP) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	21,147.80	2,913.14
26 05 13 16-0038		**5 KV Non-Shielded Single Copper Conductor** *(26 05 13 16-0002)*		
26 05 13 16-0039	MLF	1/0 AWG, 5 KV, Non-Shielded, Single Copper Conductor Cable, Installed In Duct	8,651.96	1,817.81
26 05 13 16-0040	MLF	2/0 AWG, 5 KV, Non-Shielded, Single Copper Conductor Cable, Installed In Duct	10,154.93	1,843.93
26 05 13 16-0041	MLF	3/0 AWG, 5 KV, Non-Shielded, Single Copper Conductor Cable, Installed In Duct	11,657.92	1,870.06
26 05 13 16-0042	MLF	4/0 AWG, 5 KV, Non-Shielded, Single Copper Conductor Cable, Installed In Duct	12,171.80	1,911.40
26 05 13 16-0043	MLF	350 MCM, 5 KV, Non-Shielded, Single Copper Conductor Cable, Installed In Duct	14,789.74	1,984.31
26 05 13 16-0044	MLF	500 MCM, 5 KV, Non-Shielded, Single Copper Conductor Cable, Installed In Duct	21,628.61	2,079.57
26 05 13 16-0045	MLF	750 MCM, 5 KV, Non-Shielded, Single Copper Conductor Cable, Installed In Duct	33,881.45	2,599.47
26 05 13 16-0046	MLF	1,000 MCM, 5 KV, Non-Shielded, Single Copper Conductor Cable, Installed In Duct	38,785.95	3,466.01
26 05 13 16-0047		**Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor, 133 Percent Insulation, Installed In Duct** *(26 05 13 16-0002)*		
26 05 13 16-0048	MLF	#6 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor Cable, Installed In Duct	4,219.44	912.15
26 05 13 16-0049	MLF	#4 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor Cable, Installed In Duct	5,111.43	995.98
26 05 13 16-0050	MLF	#2 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor Cable, Installed In Duct	6,188.94	1,125.32
26 05 13 16-0051	MLF	#1 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor Cable, Installed In Duct	7,161.50	1,255.81
26 05 13 16-0052	MLF	1/0 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor Cable, Installed In Duct	8,134.42	1,386.43
26 05 13 16-0053	MLF	2/0 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor Cable, Installed In Duct	9,289.79	1,561.25
26 05 13 16-0054	MLF	3/0 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor Cable, Installed In Duct	11,658.33	1,732.93

copyright 2026 The Gordian Group, Inc.

	MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 13 16-0055		MLF	4/0 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor Cable, Installed In Duct	13,127.49	1,947.14
26 05 13 16-0056		MLF	250 MCM, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor Cable, Installed In Duct	15,786.72	2,166.28
26 05 13 16-0057		MLF	350 MCM, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor Cable, Installed In Duct	18,317.04	2,586.48
26 05 13 16-0058		MLF	500 MCM, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor Cable, Installed In Duct	23,401.71	3,040.34
26 05 13 16-0059		MLF	750 MCM, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor Cable, Installed In Duct	36,194.25	3,583.37
26 05 13 16-0060		MLF	1,000 MCM, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor Cable, Installed In Duct	48,992.43	4,126.14
26 05 13 16-0061			Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor, 133 Percent Insulation, Direct Burial *(26 05 13 16-0002)*		
			Note: Excludes excavation.		
26 05 13 16-0062		MLF	#6 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	4,105.43	
26 05 13 16-0063		MLF	#4 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	4,787.75	
26 05 13 16-0064		MLF	#2 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	5,541.89	
26 05 13 16-0065		MLF	#1 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	6,295.90	
26 05 13 16-0066		MLF	1/0 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	7,048.92	
26 05 13 16-0067		MLF	2/0 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	7,767.15	
26 05 13 16-0068		MLF	3/0 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	9,920.17	
26 05 13 16-0069		MLF	4/0 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	10,853.86	
26 05 13 16-0070		MLF	250 MCM, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	13,184.45	
26 05 13 16-0071		MLF	350 MCM, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	14,778.03	
26 05 13 16-0072		MLF	500 MCM, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	18,830.60	
26 05 13 16-0073			Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor, 133 Percent Insulation, Installed On Poles (Aerial) *(26 05 13 16-0002)*		
26 05 13 16-0074		MLF	#6 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	3,451.85	568.10
26 05 13 16-0075		MLF	#4 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	4,243.67	609.11
26 05 13 16-0076		MLF	#2 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	5,426.70	770.28
26 05 13 16-0077		MLF	#1 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	6,291.02	852.08
26 05 13 16-0078		MLF	1/0 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	7,158.41	935.10
26 05 13 16-0079		MLF	2/0 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	8,309.68	1,097.72
26 05 13 16-0080		MLF	3/0 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	10,668.75	1,255.36
26 05 13 16-0081		MLF	4/0 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	12,138.16	1,456.57
26 05 13 16-0082		MLF	250 MCM, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	15,250.68	1,832.46
26 05 13 16-0083		MLF	350 MCM, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	18,024.78	2,318.63
26 05 13 16-0084		MLF	500 MCM, Ethylene-Propylene Rubber (EPR) Insulation, 5 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	23,558.11	2,913.14
26 05 13 16-0085			15 KV Cable *(26 05 13 16-0001)*		
26 05 13 16-0086			Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable *(26 05 13 16-0085)*		
26 05 13 16-0087			Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed In Duct *(26 05 13 16-0086)*		
26 05 13 16-0088		MLF	#4 AWG, Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installled In Duct	8,803.81	1,817.81
26 05 13 16-0089		MLF	#2 AWG, Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installled In Duct	9,670.27	1,817.81
26 05 13 16-0090		MLF	#1 AWG, Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installled In Duct	10,000.77	1,817.81
26 05 13 16-0091		MLF	1/0 AWG, Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installled In Duct	11,077.42	1,817.81

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 13 16-0092	MLF	2/0 AWG, Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installled In Duct	12,099.32	1,817.81
26 05 13 16-0093	MLF	3/0 AWG, Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installled In Duct	14,013.67	1,897.48
26 05 13 16-0094	MLF	4/0 AWG, Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installled In Duct	14,415.13	1,897.48
26 05 13 16-0095	MLF	250 MCM, Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installled In Duct	16,822.19	1,984.31
26 05 13 16-0096	MLF	350 MCM, Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installled In Duct	19,292.49	2,030.84
26 05 13 16-0097	MLF	500 MCM, Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installled In Duct	24,003.59	2,287.54

26 05 13 16-0098 Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial *(26 05 13 16-0086)*

Note: Excludes excavation.

26 05 13 16-0099	MLF	#1 AWG, Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	8,045.35	
26 05 13 16-0100	MLF	1/0 AWG, Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	9,121.99	
26 05 13 16-0101	MLF	2/0 AWG, Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	10,143.89	
26 05 13 16-0102	MLF	3/0 AWG, Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	12,083.40	
26 05 13 16-0103	MLF	4/0 AWG, Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	12,484.85	
26 05 13 16-0104	MLF	250 MCM, Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	14,998.91	
26 05 13 16-0105	MLF	350 MCM, Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	17,472.86	
26 05 13 16-0106	MLF	500 MCM, Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	21,924.02	

26 05 13 16-0107 Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial) *(26 05 13 16-0086)*

26 05 13 16-0108	MLF	#1 AWG, Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	7,617.16	811.55
26 05 13 16-0109	MLF	1/0 AWG, Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	9,022.83	935.10
26 05 13 16-0110	MLF	2/0 AWG, Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	10,477.77	1,097.72
26 05 13 16-0111	MLF	3/0 AWG, Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	12,612.98	1,255.36
26 05 13 16-0112	MLF	4/0 AWG, Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	13,550.15	1,456.57
26 05 13 16-0113	MLF	250 MCM, Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	16,376.75	1,695.64
26 05 13 16-0114	MLF	350 MCM, Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	19,476.78	1,975.85
26 05 13 16-0115	MLF	500 MCM, Cross-Linked Polyethylene (XLP) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	24,396.48	2,295.14

26 05 13 16-0116 Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable *(26 05 13 16-0085)*

26 05 13 16-0117 Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed In Duct *(26 05 13 16-0116)*

26 05 13 16-0118	MLF	#4 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed In Duct	9,570.48	1,817.81
26 05 13 16-0119	MLF	#2 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed In Duct	10,592.90	1,817.81
26 05 13 16-0120	MLF	#1 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed In Duct	10,982.89	1,817.81
26 05 13 16-0121	MLF	1/0 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed In Duct	12,253.33	1,817.81
26 05 13 16-0122	MLF	2/0 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed In Duct	13,459.17	1,817.81
26 05 13 16-0123	MLF	3/0 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed In Duct	15,682.29	1,897.48
26 05 13 16-0124	MLF	4/0 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed In Duct	16,156.02	1,897.48
26 05 13 16-0125	MLF	250 MCM, Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed In Duct	18,957.24	1,984.31
26 05 13 16-0126	MLF	350 MCM, Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed In Duct	21,851.26	2,030.84
26 05 13 16-0127	MLF	500 MCM, Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed In Duct	27,294.84	2,287.54

copyright 2026 The Gordian Group, Inc.

CSI	MINOR UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 13 16-0128		Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial *(26 05 13 16-0116)*		
		Note: Excludes excavation.		
26 05 13 16-0129	MLF	#1 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	9,027.47	
26 05 13 16-0130	MLF	1/0 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	10,297.91	
26 05 13 16-0131	MLF	2/0 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	11,503.75	
26 05 13 16-0132	MLF	3/0 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	13,752.02	
26 05 13 16-0133	MLF	4/0 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	14,225.73	
26 05 13 16-0134	MLF	250 MCM, Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	17,127.74	
26 05 13 16-0135	MLF	350 MCM, Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	20,023.49	
26 05 13 16-0136	MLF	500 MCM, Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Direct Burial	25,215.28	
26 05 13 16-0137		Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial) *(26 05 13 16-0116)*		
26 05 13 16-0138	MLF	#1 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	8,599.28	811.55
26 05 13 16-0139	MLF	1/0 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	10,198.75	935.10
26 05 13 16-0140	MLF	2/0 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	11,837.63	1,097.72
26 05 13 16-0141	MLF	3/0 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	14,281.60	1,255.36
26 05 13 16-0142	MLF	4/0 AWG, Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	15,291.03	1,456.57
26 05 13 16-0143	MLF	250 MCM, Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	18,511.80	1,695.64
26 05 13 16-0144	MLF	350 MCM, Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	22,035.55	1,975.85
26 05 13 16-0145	MLF	500 MCM, Ethylene-Propylene Rubber (EPR) Insulation, 15 KV, Shielded, Single Copper Conductor, 133% Insulation Cable, Installed On Poles (Aerial)	27,687.74	2,295.14
26 05 13 16-0146		15 KV Non-Shielded Single Copper Conductor *(26 05 13 16-0085)*		
26 05 13 16-0147	MLF	1/0 AWG, 15 KV, Non-Shielded, Single Copper Conductor Cable, Installed In Duct	13,426.82	1,824.18
26 05 13 16-0148	MLF	2/0 AWG, 15 KV, Non-Shielded, Single Copper Conductor Cable, Installed In Duct	11,319.22	1,867.79
26 05 13 16-0149	MLF	3/0 AWG, 15 KV, Non-Shielded, Single Copper Conductor Cable, Installed In Duct	17,913.77	1,911.40
26 05 13 16-0150	MLF	350 MCM, 15 KV, Non-Shielded, Single Copper Conductor Cable, Installed In Duct	25,217.03	2,038.76
26 05 13 16-0151		Shielded, Armored Copper, 15 KV, 3 Conductor Cable *(26 05 13 16-0085)*		
		Note: Laid in cable tray or hung in vertical cable shaft.		
26 05 13 16-0152		Galvanized Steel Interlocked Armor Cable *(26 05 13 16-0151)*		
26 05 13 16-0153	LF	3 Conductors, #2 AWG, TC, 15 KV, Galvanized Armored Shielded Cable, Laid In Cable Tray Or Hung Vertically	58.52	13.91
26 05 13 16-0154	LF	3 Conductors, 1/0 AWG, TC, 15 KV, Galvanized Armored Shielded Cable, Laid In Cable Tray Or Hung Vertically	71.68	14.82
26 05 13 16-0155		Aluminum Interlocked Armor Cable *(26 05 13 16-0151)*		
26 05 13 16-0156	LF	3 Conductors, #2 AWG, TC, 15 KV, Aluminum Armored Shielded Cable, Laid In Cable Tray Or Hung Vertically	58.52	13.91
26 05 13 16-0157	LF	3 Conductor, 1/0 AWG, TC, 15 KV, Aluminum Armored Shielded Cable, Laid In Cable Tray Or Hung Vertically	71.68	14.82
26 05 13 16-0158		Underground Residential Distribution (URD), 15 KV Primary Concentric UD Cable *(26 05 13 16-0085)*		
		Note: 0.175" cross-linked polyethylene (XLPE) insulation, copper conductor.		
26 05 13 16-0159	MLF	#4 AWG, Underground Residential Distribution (URD), Cross-Linked Polyethylene (XLPE) Insulation, 15 KV, Shielded, Single Conductor Cable, Installed In Conduit	4,346.08	912.15
26 05 13 16-0160	MLF	#2 AWG, Underground Residential Distribution (URD), Cross-Linked Polyethylene (XLPE) Insulation, 15 KV, Shielded, Single Conductor Cable, Installed In Conduit	5,282.62	995.98
26 05 13 16-0161	MLF	#1 AWG, Underground Residential Distribution (URD), Cross-Linked Polyethylene (XLPE) Insulation, 15 KV, Shielded, Single Conductor Cable, Installed In Conduit	6,409.38	1,125.32
26 05 13 16-0162	MLF	1/0 AWG, Underground Residential Distribution (URD), Cross-Linked Polyethylene (XLPE) Insulation, 15 KV, Shielded, Single Conductor Cable, Installed In Conduit	8,430.06	1,382.66
26 05 13 16-0163	MLF	2/0 AWG, Underground Residential Distribution (URD), Cross-Linked Polyethylene (XLPE) Insulation, 15 KV, Shielded, Single Conductor Cable, Installed In Conduit	9,629.87	1,556.56
26 05 13 16-0164	MLF	3/0 AWG, Underground Residential Distribution (URD), Cross-Linked Polyethylene (XLPE) Insulation, 15 KV, Shielded, Single Conductor Cable, Installed In Conduit	12,136.73	1,732.93
26 05 13 16-0165	MLF	4/0 AWG, Underground Residential Distribution (URD), Cross-Linked Polyethylene (XLPE) Insulation, 15 KV, Shielded, Single Conductor Cable, Installed In Conduit	13,648.70	1,939.86

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 13 16-0166		15 KV, Underground Residential Distribution (URD), Copper Cable, Direct Burial *(26 05 13 16-0085)*		
26 05 13 16-0167	MLF	3 Conductors, #6 AWG, 15 KV, URD Copper Cable, Direct Burial	24,531.55	
26 05 13 16-0168		Wire Connections *(26 05 13 16-0001)*		
26 05 13 16-0169		Medium Voltage Up To 5 KV *(26 05 13 16-0168)*		
26 05 13 16-0170		Shielded One Conductor Cable Splice *(26 05 13 16-0169)*		
26 05 13 16-0171	EA	#6 AWG Cable Splice, To 5 KV One Conductor, Shielded Medium Voltage To 5 KV	510.29	112.80
26 05 13 16-0172	EA	#2 AWG Cable Splice, To 5 KV One Conductor, Shielded Medium Voltage To 5 KV	800.24	112.80
26 05 13 16-0173	EA	1/0 AWG Cable Splice, To 5 KV One Conductor, Shielded Medium Voltage To 5 KV	800.24	112.80
26 05 13 16-0174	EA	2/0 AWG Cable Splice, To 5 KV One Conductor, Shielded Medium Voltage To 5 KV	833.81	135.36
26 05 13 16-0175	EA	3/0 AWG Cable Splice, To 5 KV One Conductor, Shielded Medium Voltage To 5 KV	833.81	135.36
26 05 13 16-0176	EA	4/0 AWG Cable Splice, To 5 KV One Conductor, Shielded Medium Voltage To 5 KV	833.81	135.36
26 05 13 16-0177	EA	250 MCM Cable Splice, To 5 KV One Conductor, Shielded Medium Voltage To 5 KV	878.58	157.93
26 05 13 16-0178	EA	350 MCM Cable Splice, To 5 KV One Conductor, Shielded Medium Voltage To 5 KV	878.58	157.93
26 05 13 16-0179	EA	500 MCM Cable Splice, To 5 KV One Conductor, Shielded Medium Voltage To 5 KV	878.58	157.93
26 05 13 16-0180		Cable Termination Without Stress Cone *(26 05 13 16-0169)*		
26 05 13 16-0181	EA	#6 To 4/0 AWG Cable Termination Without Stress Cone, Medium Voltage To 5 KV	884.02	135.36
26 05 13 16-0182	EA	250 To 500 MCM Cable Termination Without Stress Cone, Medium Voltage To 5 KV	1,015.23	157.93
26 05 13 16-0183		Cable Termination With Stress Cone *(26 05 13 16-0169)*		
26 05 13 16-0184	EA	#6 To 4/0 AWG Cable Termination With Stress Cone, Medium Voltage To 5 KV	3,029.01	270.72
26 05 13 16-0185	EA	250 To 500 MCM Cable Termination With Stress Cone, Medium Voltage To 5 KV	4,143.47	372.25
26 05 13 16-0186		Connect To Pothead, Pothead Included *(26 05 13 16-0169)*		
26 05 13 16-0187	EA	#6 To 4/0 AWG Connection To Pothead (Included) Medium Voltage To 5 KV	3,204.14	270.72
26 05 13 16-0188	EA	250 To 500 MCM Connection To Pothead (Included) Medium Voltage To 5 KV	4,193.32	310.20
26 05 13 16-0189		Two Conductor Pothead *(26 05 13 16-0169)* Note: Includes 5 KV pothead.		
26 05 13 16-0190	EA	#6 To 4/0 AWG, Two Conductors, 5 KV Pothead (Included) Medium Voltage To 5 KV	1,806.99	372.25
26 05 13 16-0191	EA	250 To 350 MCM, Two Conductors, 5 KV Pothead (Included) Medium Voltage To 5 KV	2,522.50	473.77
26 05 13 16-0192	EA	400 To 700 MCM, Two Conductors, 5 KV Pothead (Included) Medium Voltage To 5 KV	4,393.08	537.16
26 05 13 16-0193	EA	750 MCM, Two Conductors, 5 KV Pothead (Included) Medium Voltage To 5 KV	7,890.90	626.72
26 05 13 16-0194	EA	1,000 MCM, Two Conductors, 5 KV Pothead (Included) Medium Voltage To 5 KV	15,155.13	939.97
26 05 13 16-0195		Three Conductor Pothead *(26 05 13 16-0169)* Note: Includes 5 KV pothead.		
26 05 13 16-0196	EA	#6 To 4/0 AWG, Three Conductors, 5 KV Pothead (Included) Medium Voltage To 5 KV	10,317.30	541.44
26 05 13 16-0197	EA	250 To 500 MCM, Three Conductors, 5 KV Pothead (Included) Medium Voltage To 5 KV	11,180.97	631.68
26 05 13 16-0198		Copper Cable Splice, Crimp Compression Connection *(26 05 13 16-0169)* Note: For bare wire.		
26 05 13 16-0199	EA	#6 AWG Crimp Compression Connection For Bare Copper Wire	83.40	
26 05 13 16-0200	EA	#4 AWG Crimp Compression Connection For Bare Copper Wire	93.70	
26 05 13 16-0201	EA	#3 AWG Crimp Compression Connection For Bare Copper Wire	109.15	
26 05 13 16-0202	EA	#2 AWG Crimp Compression Connection For Bare Copper Wire	122.15	
26 05 13 16-0203	EA	#1 AWG Crimp Compression Connection For Bare Copper Wire	138.59	
26 05 13 16-0204	EA	1/0 AWG Crimp Compression Connection For Bare Copper Wire	153.69	
26 05 13 16-0205	EA	2/0 AWG Crimp Compression Connection For Bare Copper Wire	168.21	
26 05 13 16-0206	EA	3/0 AWG Crimp Compression Connection For Bare Copper Wire	185.08	
26 05 13 16-0207	EA	4/0 AWG Crimp Compression Connection For Bare Copper Wire	200.52	
26 05 13 16-0208	EA	250 MCM Crimp Compression Connection For Bare Copper Wire	217.03	
26 05 13 16-0209	EA	300 MCM Crimp Compression Connection For Bare Copper Wire	234.88	
26 05 13 16-0210	EA	350 MCM Crimp Compression Connection For Bare Copper Wire	249.51	
26 05 13 16-0211	EA	400 MCM Crimp Compression Connection For Bare Copper Wire	284.38	
26 05 13 16-0212	EA	500 MCM Crimp Compression Connection For Bare Copper Wire	322.48	
26 05 13 16-0213		Aluminum Cable Splice, Crimp Compression Connection *(26 05 13 16-0169)* Note: For bare wire.		
26 05 13 16-0214	EA	#6 AWG Crimp Compression Connection For Bare Aluminum Wire	89.65	
26 05 13 16-0215	EA	#4 AWG Crimp Compression Connection For Bare Aluminum Wire	97.15	
26 05 13 16-0216	EA	#2 AWG Crimp Compression Connection For Bare Aluminum Wire	133.55	
26 05 13 16-0217	EA	#1 AWG Crimp Compression Connection For Bare Aluminum Wire	167.58	
26 05 13 16-0218	EA	1/0 AWG Crimp Compression Connection For Bare Aluminum Wire	181.04	
26 05 13 16-0219	EA	2/0 AWG Crimp Compression Connection For Bare Aluminum Wire	194.34	
26 05 13 16-0220	EA	3/0 AWG Crimp Compression Connection For Bare Aluminum Wire	215.41	
26 05 13 16-0221	EA	4/0 AWG Crimp Compression Connection For Bare Aluminum Wire	232.61	
26 05 13 16-0222	EA	250 MCM Crimp Compression Connection For Bare Aluminum Wire	248.35	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 13 16-0223	EA	300 MCM Crimp Compression Connection For Bare Aluminum Wire	265.50	
26 05 13 16-0224	EA	350 MCM Crimp Compression Connection For Bare Aluminum Wire	281.65	
26 05 13 16-0225	EA	400 MCM Crimp Compression Connection For Bare Aluminum Wire	330.43	
26 05 13 16-0226	EA	500 MCM Crimp Compression Connection For Bare Aluminum Wire	379.92	
26 05 13 16-0227		15 KV *(26 05 13 16-0168)*		
26 05 13 16-0228		Single Conductor Pothead On Racks *(26 05 13 16-0227)*		
		Note: Includes pothead.		
26 05 13 16-0229	EA	#2 To 4/0 AWG, Single Conductor, 15 KV Pothead (Included), On Racks	2,156.63	473.77
26 05 13 16-0230	EA	250 To 500 MCM, Single Conductor, 15 KV Pothead (Included), On Racks	2,787.65	586.57
26 05 13 16-0231		Two Conductor Pothead On Rack *(26 05 13 16-0227)*		
		Note: Includes pothead.		
26 05 13 16-0232	EA	#2 To 4/0 AWG, Two Conductors, 15 KV Pothead (Included), On Racks	3,087.02	721.93
26 05 13 16-0233	EA	250 To 500 MCM, Two Conductors, 15 KV Pothead (Included), On Racks	3,756.55	857.28
26 05 13 16-0234		Three Conductor Pothead On Rack *(26 05 13 16-0227)*		
		Note: Includes pothead.		
26 05 13 16-0235	EA	#2 To 4/0 AWG, Three Conductors, 15 KV Pothead (Included), On Racks	3,892.00	936.25
26 05 13 16-0236	EA	250 To 500 MCM, Three Conductors, 15 KV Pothead (Included), On Racks	4,836.78	1,173.12
26 05 13 16-0237		Stress Relief Cone On Rack *(26 05 13 16-0227)*		
26 05 13 16-0238	EA	#2 To 4/0 AWG Stress Relief Cone, On Rack	1,945.04	473.77
26 05 13 16-0239	EA	250 To 500 MCM Stress Relief Cone, On Rack	2,549.76	586.57
26 05 13 16-0240		Grounded, Shielded Cable Splice *(26 05 13 16-0227)*		
26 05 13 16-0241	EA	#2 To 4/0 AWG Cable Splice, Grounded, Shielded, 15 KV	1,264.60	349.68
26 05 13 16-0242	EA	250 To 500 MCM Cable Splice, Grounded, Shielded, 15 KV	1,610.94	451.20
26 05 13 16-0243	EA	3/0 To 500 MCM 15 KV Splice Kit, Cable Splice, Grounded, Shielded, Universal Mechanical Type CE - CE 2-Way	10,475.47	1,240.80
26 05 13 16-0244	EA	3/0 To 500 MCM 15 KV Splice Kit, Cable Splice, Grounded, Shielded, Universal Mechanical Type CE - CE - CE 3-Way	14,157.17	1,353.61
26 05 13 16-0245		Cable Termination *(26 05 13 16-0227)*		
26 05 13 16-0246	EA	#2 To 3/0 AWG Cable Termination 15 KV	940.94	197.40
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*118.44*	
26 05 13 16-0247	EA	4/0 To 250 MCM Cable Termination 15 KV	1,175.81	253.80
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*152.28*	
26 05 13 16-0248	EA	350 To 500 MCM Cable Termination 15 KV	1,470.82	310.20
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*186.12*	
26 05 13 16-0249	EA	#2 To 3/0 AWG Cable Elbow Termination 15 KV	637.57	112.80
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*67.68*	
26 05 13 16-0250		Stress Cones, 5-15 KV, 4 Skirted *(26 05 13 16-0227)*		
26 05 13 16-0251	EA	#4 To 1/0 AWG Stress Cones, 5-15 KV, 4 Skirted	1,511.37	146.64
26 05 13 16-0252	EA	2/0 To 3/0 AWG Stress Cones, 5-15 KV, 4 Skirted	1,736.87	162.08
26 05 13 16-0253	EA	4/0 To 350 MCM Stress Cones, 5-15 KV, 4 Skirted	2,107.30	177.37
26 05 13 16-0254	EA	400 To 500 MCM Stress Cones, 5-15 KV, 4 Skirted	2,780.47	204.35
26 05 13 16-0255		Stress Cones, 5-15 KV, 6 Skirted *(26 05 13 16-0227)*		
26 05 13 16-0256	EA	#4 To 1/0 AWG Stress Cones, 5-15 KV, 6 Skirted	3,022.80	293.78
26 05 13 16-0257	EA	2/0 To 3/0 AWG Stress Cones, 5-15 KV, 6 Skirted	3,474.27	324.14
26 05 13 16-0258	EA	4/0 To 350 MCM Stress Cones, 5-15 KV, 6 Skirted	4,201.42	348.15
26 05 13 16-0259	EA	400 To 500 MCM Stress Cones, 5-15 KV, 6 Skirted	5,560.93	408.70
26 05 13 16-0260		35 KV *(26 05 13 16-0168)*		
26 05 13 16-0261		35 KV One Conductor Splice *(26 05 13 16-0260)*		
26 05 13 16-0262	EA	#1 Stranded To 4/0 Stranded, 35 KV, Cable Splicing	3,185.60	
26 05 13 16-0263		Cable Termination *(26 05 13 16-0260)*		
26 05 13 16-0264	EA	#2 To 3/0 AWG Cable Termination, 35 KV	929.98	135.47
26 05 13 16-0265	EA	3/0 AWG To 250 MCM, 35 KV, Cable Termination	1,215.10	204.40
26 05 13 16-0266	EA	350 To 500 MCM Cable Termination 35 KV	1,463.49	218.61
26 05 13 16-0267	EA	#2 To 3/0 AWG Cable Elbow Termination 35 KV	722.76	112.80
26 05 13 16-0268		70 KV *(26 05 13 16-0168)*		
26 05 13 16-0269		Cable Splice *(26 05 13 16-0268)*		
26 05 13 16-0270	EA	350 MCM, 70 KV, Cable Splicing	26,802.92	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 13 16-0271	EA	#2 To 4/0, 70 KV, Cable Splicing	3,399.65	

26 05 19 Low-Voltage Electrical Power Conductors and Cables *(26 05)*

26 05 19 13 Undercarpet Electrical Power Cables *(26 05 19)*

26 05 19 13-0001 Under Carpet Power System *(26 05 19 13)*

Note: Includes laying out, floor prep, taping, drill floor, folds, identifying, tagging and testing

26 05 19 13-0002	LF	3-Conductor, #12 Flat Cable With Attached Bottom Shield	7.87	0.51
26 05 19 13-0003	LF	Steel, Top Shield	13.67	0.51
26 05 19 13-0004	EA	3-Conductor, Splice	39.61	8.76
26 05 19 13-0005	EA	Splice Top Shield For 3 Conductor	10.06	4.12
26 05 19 13-0006	EA	3-Conductor, Tap	49.91	10.31
26 05 19 13-0007	EA	Insulating Patch, Splice Tap And End	84.15	8.76
26 05 19 13-0008	EA	3-Conductor, Transition Block Assembly	55.39	5.15
26 05 19 13-0009	EA	Single, Direct Connected, Receptacle With Box	166.25	16.49
26 05 19 13-0010	EA	Dual, Direct Connected, Receptacle With Box	278.53	25.76
26 05 19 13-0011	EA	Floor Mounted Box With Cover	281.94	20.61
26 05 19 13-0012	LF	5-Conductor, #12 Cable With Attached Bottom Shield	12.79	0.51
26 05 19 13-0013	LF	Steel, Top Shield For 5-Conductor Cable	12.69	0.51
26 05 19 13-0014	EA	5-Conductor, Splice	40.24	8.76
26 05 19 13-0015	EA	5-Conductor, Transition Block Assembly	74.72	5.15
26 05 19 13-0016	EA	Box, Wall, Flush With Cover	116.74	20.61
26 05 19 13-0017	EA	Telephone, Transition Fitting Wall Box	73.98	17.01
26 05 19 13-0018	EA	RJ-45, Telephone Fitting With Duplex Jack And Cover	99.79	19.58
26 05 19 13-0019	EA	Miniature Telephone With Duplex RJ-45	43.55	7.73
26 05 19 13-0020	LF	4-Pair, Level 5, Under Carpet Telephone Wire	2.47	0.51
26 05 19 13-0021	EA	BNC, Coax Plug, Connector	31.16	10.31
26 05 19 13-0022	EA	TNC, Coax Plug, Connector	31.16	10.31
26 05 19 13-0023	CLF	Under Carpet Power System; Flat RG A/U 59, 75 Ohm, RG A/U 62, 93 Ohm, RG A/U 58, 50 Ohm	166.15	51.52

26 05 19 16 Low-Voltage, Single-and Multi-Conductor Cables *(26 05 19)*

26 05 19 16-0001 Cable Installation Methods *(26 05 19 16)*

26 05 19 16-0002 Pull Cord *(26 05 19 16-0001)*

Note: Left in conduit for others to pull cable. Not to be used when contractor has priced new wire in a conduit. Priced when owner wants a pull cord left in a conduit for owner to pull wire at a later time.

26 05 19 16-0003	LF	Pull String Installed To Remain In Place, In Existing Conduit	0.36	
26 05 19 16-0004	LF	Pull String Installed To Remain In Place, In New Conduits	0.19	
26 05 19 16-0005	LF	1/4" Nylon Pull Cord Installed To Remain In Place, In Existing Conduit	0.64	
26 05 19 16-0006	LF	1/4" Nylon Pull Cord Installed To Remain In Place, In New Conduits	0.42	

26 05 19 16-0007 Bore Conduit Into Dirt Or Sand *(26 05 19 16-0001)*

Note: For installation under roads, driveways or other structures up to 20'.

26 05 19 16-0008	LF	Bore 1" To 4" Conduit Into Dirt Or Sand	3.66	
26 05 19 16-0009	LF	Bore 5" To 8" Conduit Into Dirt Or Sand	4.65	
26 05 19 16-0010	EA	Minimum Set-up Charge For Boring Note: For projects where the total boring charge is less than the minimum set-up charge. Use this item exclusively. This item should not be used in conjunction with any other items in this section.	512.15	

26 05 19 16-0011 Wire and Cable *(26 05 19 16)*

Note: Pulled in conduit except as noted. Includes pull wires, pulling branch circuit conductors, splicing (#8 and lighter), identifying, tagging and testing. All conductors are copper except as otherwise noted. No special set-up is required. For tasks installed in conduit, tasks exclude conduit. Excludes terminations. See CSI section 26 05 33 13-0058 for various conduit types.

26 05 19 16-0012 Multi-Conductor Cords, Cables And Associated Equipment *(26 05 19 16-0011)*

26 05 19 16-0013 Multi-Conductor Cords *(26 05 19 16-0012)*

Note: Includes installation in cable tray, surface mounting or installation between junction boxes. Excludes strain relief devices, plugs and connector bodies.

26 05 19 16-0014 Multi-Conductor Type SOOW And SJOOW Cord *(26 05 19 16-0013)*

Note: Includes ethylene propylene diene monomer (EPDM) rubber insulation.

26 05 19 16-0015 300 Volt, 90 Degree Celsius, Multi-Conductor Type SJOOW Cord *(26 05 19 16-0014)*

26 05 19 16-0016 #18, 300 Volt, 90 Degree Celsius, Multi-Conductor Type SJOOW Cord *(26 05 19 16-0015)*

26 05 19 16-0017	LF	2 Conductors, #18 AWG, 300 Volt, 90 Degree Celsius, Multi-Conductor Type SJOOW Cord (Carol Carolprene)	1.02	0.45
26 05 19 16-0018	LF	3 Conductors, #18 AWG, 300 Volt, 90 Degree Celsius, Multi-Conductor Type SJOOW Cord (Carol Carolprene)	1.06	0.45
26 05 19 16-0019	LF	4 Conductors, #18 AWG, 300 Volt, 90 Degree Celsius, Multi-Conductor Type SJOOW Cord (Carol Carolprene)	1.16	0.45

26 05 19 16-0020 #16, 300 Volt, 90 Degree Celsius, Multi-Conductor Type SJOOW Cord *(26 05 19 16-0015)*

26 05 19 16-0021	LF	2 Conductors, #16 AWG, 300 Volt, 90 Degree Celsius, Multi-Conductor Type SJOOW Cord (Carol Carolprene)	1.20	0.45
26 05 19 16-0022	LF	3 Conductors, #16 AWG, 300 Volt, 90 Degree Celsius, Multi-Conductor Type SJOOW Cord (Carol Carolprene)	1.26	0.45
26 05 19 16-0023	LF	4 Conductors, #16 AWG, 300 Volt, 90 Degree Celsius, Multi-Conductor Type SJOOW Cord (Carol Carolprene)	1.34	0.45

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 19 16-0024		#14, 300 Volt, 90 Degree Celsius, Multi-Conductor Type SJOOW Cord *(26 05 19 16-0015)*		
26 05 19 16-0025	LF	2 Conductors, #14 AWG, 300 Volt, 90 Degree Celsius, Multi-Conductor Type SJOOW Cord (Carol Carolprene)	1.31	0.45
26 05 19 16-0026	LF	3 Conductors, #14 AWG, 300 Volt, 90 Degree Celsius, Multi-Conductor Type SJOOW Cord (Carol Carolprene)	1.41	0.45
26 05 19 16-0027	LF	4 Conductors, #14 AWG, 300 Volt, 90 Degree Celsius, Multi-Conductor Type SJOOW Cord (Carol Carolprene)	1.59	0.45
26 05 19 16-0028		#12, 300 Volt, 90 Degree Celsius, Multi-Conductor Type SJOOW Cord *(26 05 19 16-0015)*		
26 05 19 16-0029	LF	2 Conductors, #12 AWG, 300 Volt, 90 Degree Celsius, Multi-Conductor Type SJOOW Cord (Carol Carolprene)	1.47	0.45
26 05 19 16-0030	LF	3 Conductors, #12 AWG, 300 Volt, 90 Degree Celsius, Multi-Conductor Type SJOOW Cord (Carol Carolprene)	1.58	0.45
26 05 19 16-0031	LF	4 Conductors, #12 AWG, 300 Volt, 90 Degree Celsius, Multi-Conductor Type SJOOW Cord (Carol Carolprene)	1.74	0.45
26 05 19 16-0032		#10, 300 Volt, 90 Degree Celsius, Multi-Conductor Type SJOOW Cord *(26 05 19 16-0015)*		
26 05 19 16-0033	LF	2 Conductors, #10 AWG, 300 Volt, 90 Degree Celsius, Multi-Conductor Type SJOOW Cord (Carol Carolprene)	1.84	0.56
26 05 19 16-0034	LF	3 Conductors, #10 AWG, 300 Volt, 90 Degree Celsius, Multi-Conductor Type SJOOW Cord (Carol Carolprene)	1.92	0.56
26 05 19 16-0035	LF	4 Conductors, #10 AWG, 300 Volt, 90 Degree Celsius, Multi-Conductor Type SJOOW Cord (Carol Carolprene)	2.04	0.56
26 05 19 16-0036		600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord *(26 05 19 16-0014)*		
26 05 19 16-0037		#18, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord *(26 05 19 16-0036)*		
26 05 19 16-0038	LF	2 Conductors, #18 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Carolprene)	1.06	0.45
26 05 19 16-0039	LF	3 Conductors, #18 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Carolprene)	1.13	0.45
26 05 19 16-0040	LF	4 Conductors, #18 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Carolprene)	1.22	0.45
26 05 19 16-0041	LF	5 Conductors, #18 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	2.00	0.61
26 05 19 16-0042	LF	6 Conductors, #18 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	2.16	0.62
26 05 19 16-0043	LF	7 Conductors, #18 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	2.29	0.64
26 05 19 16-0044	LF	8 Conductors, #18 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	2.49	0.66
26 05 19 16-0045	LF	10 Conductors, #18 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	2.82	0.69
26 05 19 16-0046	LF	12 Conductors, #18 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	3.18	0.71
26 05 19 16-0047	LF	14 Conductors, #18 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	4.09	0.73
26 05 19 16-0048	LF	16 Conductors, #18 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	4.17	0.74
26 05 19 16-0049	LF	18 Conductors, #18 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	4.28	0.76
26 05 19 16-0050	LF	20 Conductors, #18 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	4.72	0.78
26 05 19 16-0051	LF	24 Conductors, #18 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	5.86	0.79
26 05 19 16-0052	LF	30 Conductors, #18 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	6.13	0.84
26 05 19 16-0053		#16, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord *(26 05 19 16-0036)*		
26 05 19 16-0054	LF	2 Conductors, #16 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Carolprene)	1.26	0.45
26 05 19 16-0055	LF	3 Conductors, #16 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Carolprene)	1.32	0.45
26 05 19 16-0056	LF	4 Conductors, #16 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Carolprene)	1.43	0.45
26 05 19 16-0057	LF	5 Conductors, #16 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	2.07	0.61
26 05 19 16-0058	LF	6 Conductors, #16 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	2.26	0.62
26 05 19 16-0059	LF	7 Conductors, #16 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	2.45	0.64
26 05 19 16-0060	LF	8 Conductors, #16 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	2.69	0.66
26 05 19 16-0061	LF	9 Conductors, #16 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	2.80	0.68
26 05 19 16-0062	LF	10 Conductors, #16 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	3.07	0.69
26 05 19 16-0063	LF	12 Conductors, #16 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	3.54	0.71
26 05 19 16-0064	LF	14 Conductors, #16 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	3.78	0.73
26 05 19 16-0065	LF	16 Conductors, #16 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	4.23	0.74
26 05 19 16-0066	LF	18 Conductors, #16 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	4.84	0.76
26 05 19 16-0067	LF	20 Conductors, #16 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	5.38	0.78
26 05 19 16-0068	LF	24 Conductors, #16 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	6.43	0.79
26 05 19 16-0069	LF	26 Conductors, #16 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	7.04	0.81
26 05 19 16-0070	LF	30 Conductors, #16 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	8.15	0.84
26 05 19 16-0071		#14, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord *(26 05 19 16-0036)*		
26 05 19 16-0072	LF	2 Conductors, #14 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Carolprene)	1.42	0.45
26 05 19 16-0073	LF	3 Conductors, #14 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Carolprene)	1.49	0.45

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 19 16-0074	LF	4 Conductors, #14 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Carolprene)	1.66	0.45
26 05 19 16-0075	LF	5 Conductors, #14 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	2.60	0.61
26 05 19 16-0076	LF	6 Conductors, #14 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	3.06	0.62
26 05 19 16-0077	LF	7 Conductors, #14 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	3.23	0.64
26 05 19 16-0078	LF	8 Conductors, #14 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	3.60	0.66
26 05 19 16-0079	LF	9 Conductors, #14 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	3.86	0.68
26 05 19 16-0080	LF	10 Conductors, #14 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	4.27	0.69
26 05 19 16-0081	LF	12 Conductors, #14 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	4.67	0.71
26 05 19 16-0082	LF	14 Conductors, #14 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	5.13	0.73
26 05 19 16-0083	LF	16 Conductors, #14 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	6.10	0.74
26 05 19 16-0084	LF	20 Conductors, #14 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	6.81	0.78
26 05 19 16-0085	LF	24 Conductors, #14 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	7.97	0.79
26 05 19 16-0086	LF	30 Conductors, #14 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	9.39	0.84
26 05 19 16-0087		#12, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord *(26 05 19 16-0036)*		
26 05 19 16-0088	LF	2 Conductors, #12 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Carolprene)	1.59	0.45
26 05 19 16-0089	LF	3 Conductors, #12 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Carolprene)	1.72	0.45
26 05 19 16-0090	LF	4 Conductors, #12 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Carolprene)	1.84	0.45
26 05 19 16-0091	LF	5 Conductors, #12 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	2.93	0.61
26 05 19 16-0092	LF	6 Conductors, #12 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	3.36	0.62
26 05 19 16-0093	LF	7 Conductors, #12 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	3.80	0.64
26 05 19 16-0094	LF	8 Conductors, #12 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	4.27	0.66
26 05 19 16-0095	LF	9 Conductors, #12 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	4.61	0.68
26 05 19 16-0096	LF	10 Conductors, #12 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	5.18	0.69
26 05 19 16-0097	LF	12 Conductors, #12 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	5.86	0.71
26 05 19 16-0098	LF	14 Conductors, #12 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	6.49	0.73
26 05 19 16-0099	LF	16 Conductors, #12 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	7.12	0.74
26 05 19 16-0100	LF	18 Conductors, #12 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	7.43	0.76
26 05 19 16-0101	LF	20 Conductors, #12 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	8.51	0.78
26 05 19 16-0102	LF	24 Conductors, #12 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	9.62	0.79
26 05 19 16-0103	LF	26 Conductors, #12 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	10.74	0.81
26 05 19 16-0104	LF	28 Conductors, #12 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	11.10	0.83
26 05 19 16-0105	LF	30 Conductors, #12 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	11.50	0.84
26 05 19 16-0106		#10, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord *(26 05 19 16-0036)*		
26 05 19 16-0107	LF	2 Conductors, #10 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Carolprene)	1.81	0.56
26 05 19 16-0108	LF	3 Conductors, #10 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Carolprene)	1.92	0.56
26 05 19 16-0109	LF	4 Conductors, #10 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Carolprene)	2.03	0.56
26 05 19 16-0110	LF	5 Conductors, #10 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	2.58	0.61
26 05 19 16-0111	LF	6 Conductors, #10 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	4.04	0.62
26 05 19 16-0112	LF	7 Conductors, #10 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	4.70	0.64
26 05 19 16-0113	LF	10 Conductors, #10 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	5.99	0.69
26 05 19 16-0114	LF	12 Conductors, #10 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	6.82	0.71
26 05 19 16-0115	LF	16 Conductors, #10 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	8.62	0.74
26 05 19 16-0116	LF	20 Conductors, #10 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron)	12.38	0.78
26 05 19 16-0117		#8, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord *(26 05 19 16-0036)*		
26 05 19 16-0118	LF	3 Conductors, #8 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Carolprene)	3.44	0.68
26 05 19 16-0119	LF	4 Conductors, #8 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Carolprene)	3.72	0.79
26 05 19 16-0120	LF	5 Conductors, #8 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Carolprene)	4.94	0.79
26 05 19 16-0121		#6, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord *(26 05 19 16-0036)*		
26 05 19 16-0122	LF	3 Conductors, #6 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Carolprene)	4.79	0.79
26 05 19 16-0123	LF	4 Conductors, #6 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Carolprene)	5.77	0.90
26 05 19 16-0124	LF	5 Conductors, #6 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Carolprene)	6.92	1.13

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 19 16-0125		#4, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord *(26 05 19 16-0036)*			
26 05 19 16-0126	LF	3 Conductors, #4 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Carolprene)		7.55	1.13
26 05 19 16-0127	LF	4 Conductors, #4 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Carolprene)		8.26	1.24
26 05 19 16-0128	LF	5 Conductors, #4 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Carolprene)		9.90	1.35
26 05 19 16-0129		#2, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord *(26 05 19 16-0036)*			
26 05 19 16-0130	LF	3 Conductors, #2 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Carolprene)		11.69	2.26
26 05 19 16-0131	LF	4 Conductors, #2 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Carolprene)		14.85	2.82
26 05 19 16-0132	LF	5 Conductors, #2 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Carolprene)		18.19	3.72
26 05 19 16-0133		300 Volt, 105 Degree Celsius, Multi-Conductor Type SJOOW Cord *(26 05 19 16-0014)*			
26 05 19 16-0134		#18, 300 Volt, Multi-Conductor Type SJOOW Cord *(26 05 19 16-0133)*			
26 05 19 16-0135	LF	2 Conductors, #18 AWG, 300 Volt, 105 Degree Celsius, Multi-Conductor Type SJOOW Cord (Carol Super Vu-Tron III)		1.35	0.45
26 05 19 16-0136	LF	3 Conductors, #18 AWG, 300 Volt, 105 Degree Celsius, Multi-Conductor Type SJOOW Cord (Carol Super Vu-Tron III)		1.45	0.45
26 05 19 16-0137	LF	4 Conductors, #18 AWG, 300 Volt, 105 Degree Celsius, Multi-Conductor Type SJOOW Cord (Carol Super Vu-Tron III)		1.65	0.45
26 05 19 16-0138		#16, 300 Volt, Multi-Conductor Type SJOOW Cord *(26 05 19 16-0133)*			
26 05 19 16-0139	LF	2 Conductors, #16 AWG, 300 Volt, 105 Degree Celsius, Multi-Conductor Type SJOOW Cord (Carol Super Vu-Tron III)		1.41	0.45
26 05 19 16-0140	LF	3 Conductors, #16 AWG, 300 Volt, 105 Degree Celsius, Multi-Conductor Type SJOOW Cord (Carol Super Vu-Tron III)		1.58	0.45
26 05 19 16-0141	LF	4 Conductors, #16 AWG, 300 Volt, 105 Degree Celsius, Multi-Conductor Type SJOOW Cord (Carol Super Vu-Tron III)		1.66	0.45
26 05 19 16-0142		#14, 300 Volt, Multi-Conductor Type SJOOW Cord *(26 05 19 16-0133)*			
26 05 19 16-0143	LF	2 Conductors, #14 AWG, 300 Volt, 105 Degree Celsius, Multi-Conductor Type SJOOW Cord (Carol Super Vu-Tron III)		1.83	0.45
26 05 19 16-0144	LF	3 Conductors, #14 AWG, 300 Volt, 105 Degree Celsius, Multi-Conductor Type SJOOW Cord (Carol Super Vu-Tron III)		2.52	0.45
26 05 19 16-0145	LF	4 Conductors, #14 AWG, 300 Volt, 105 Degree Celsius, Multi-Conductor Type SJOOW Cord (Carol Super Vu-Tron III)		3.16	0.56
26 05 19 16-0146		600 Volt, 105 Degree Celsius, Multi-Conductor Type SOOW Cord *(26 05 19 16-0014)*			
26 05 19 16-0147		#18 AWG, 600 Volt, 105 Degree Celsius, Multi-Conductor Type SOOW Cord *(26 05 19 16-0146)*			
26 05 19 16-0148	LF	2 Conductors, #18 AWG, 600 Volt, 105 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron III)		1.78	0.45
26 05 19 16-0149	LF	3 Conductors, #18 AWG, 600 Volt, 105 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron III)		2.07	0.45
26 05 19 16-0150	LF	4 Conductors, #18 AWG, 600 Volt, 105 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron III)		2.37	0.45
26 05 19 16-0151		#16 AWG, 600 Volt, 105 Degree Celsius, Multi-Conductor Type SOOW Cord *(26 05 19 16-0146)*			
26 05 19 16-0152	LF	2/c #16, 600 Volt, 105 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron III)		1.88	0.45
26 05 19 16-0153	LF	3/c #16, 600 Volt, 105 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron III)		2.18	0.45
26 05 19 16-0154	LF	4/c #16, 600 Volt, 105 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron III)		2.64	0.45
26 05 19 16-0155	LF	5/c #16, 600 Volt, 105 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron III)		2.86	0.56
26 05 19 16-0156		#14 AWG, 600 Volt, 105 Degree Celsius, Multi-Conductor Type SOOW Cord *(26 05 19 16-0146)*			
26 05 19 16-0157	LF	3 Conductors, #14 AWG, 600 Volt, 105 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron III)		2.25	0.45
26 05 19 16-0158	LF	4 Conductors, #14 AWG, 600 Volt, 105 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron III)		2.63	0.45
26 05 19 16-0159	LF	5 Conductors, #14 AWG, 600 Volt, 105 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron III)		2.92	0.56
26 05 19 16-0160		#12 AWG, 600 Volt, 105 Degree Celsius, Multi-Conductor Type SOOW Cord *(26 05 19 16-0146)*			
26 05 19 16-0161	LF	3 Conductors, #12 AWG, 600 Volt, 105 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron III)		2.60	0.45
26 05 19 16-0162	LF	4 Conductors, #12 AWG, 600 Volt, 105 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron III)		2.94	0.45

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 19 16-0163	LF	5 Conductors, #12 AWG, 600 Volt, 105 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron III)	3.27	0.56
26 05 19 16-0164		#10, 600 Volt, 105 Degree Celsius, Multi-Conductor Type SOOW Cord *(26 05 19 16-0146)*		
26 05 19 16-0165	LF	3/c #10, 600 Volt, 105 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron III)	2.96	0.56
26 05 19 16-0166	LF	4/c #10, 600 Volt, 105 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron III)	3.26	0.56
26 05 19 16-0167	LF	5/c #10, 600 Volt, 105 Degree Celsius, Multi-Conductor Type SOOW Cord (Carol Super Vu-Tron III)	3.58	0.56
26 05 19 16-0168		Multi-Conductor Type SEOW Cord *(26 05 19 16-0013)* Note: Includes thermoplastic elastomeric (TPE) insulation.		
26 05 19 16-0169		600 Volt, 90 Degree Celsius, Multi-Conductor Type SEOW Cord *(26 05 19 16-0168)*		
26 05 19 16-0170		#16 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SEOW Cord *(26 05 19 16-0169)*		
26 05 19 16-0171	LF	3 Conductors, #16 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SEOW Cord	1.42	0.45
26 05 19 16-0172	LF	4 Conductors, #16 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SEOW Cord	1.54	0.45
26 05 19 16-0173	LF	5 Conductors, #16 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SEOW Cord	2.20	0.56
26 05 19 16-0174		#14 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SEOW Cord *(26 05 19 16-0169)*		
26 05 19 16-0175	LF	3/c #14, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SEOW Cord	1.77	0.45
26 05 19 16-0176	LF	4/c #14, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SEOW Cord	1.99	0.45
26 05 19 16-0177	LF	5/c #14, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SEOW Cord	2.75	0.56
26 05 19 16-0178		#12 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SEOW Cord *(26 05 19 16-0169)*		
26 05 19 16-0179	LF	3 Conductors, #12 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SEOW Cord	2.13	0.45
26 05 19 16-0180	LF	4 Conductors, #12 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SEOW Cord	2.42	0.45
26 05 19 16-0181	LF	5 Conductors, #12 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SEOW Cord	2.98	0.56
26 05 19 16-0182		#10 AWG, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SEOW Cord *(26 05 19 16-0169)*		
26 05 19 16-0183	LF	3/c #10, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SEOW Cord	2.64	0.56
26 05 19 16-0184	LF	4/c #10, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SEOW Cord	2.98	0.56
26 05 19 16-0185	LF	5/c #10, 600 Volt, 90 Degree Celsius, Multi-Conductor Type SEOW Cord	3.19	0.56
26 05 19 16-0186		Multi-Conductor Type W Cord *(26 05 19 16-0013)* Note: Includes ethylene propylene diene monomer (EPDM) rubber insulation.		
26 05 19 16-0187		2,000 Volt, 90 Degree Celsius, Multi-Conductor Type W Cord *(26 05 19 16-0186)*		
26 05 19 16-0188		#8 AWG, 2,000 Volt, 90 Degree Celsius, Multi-Conductor Type W Cord *(26 05 19 16-0187)*		
26 05 19 16-0189	LF	3/c #8, 2,000 Volt, 90 Degree Celsius, Multi-Conductor Type W Cord (Carol Super Vu-Tron)	3.73	0.68
26 05 19 16-0190	LF	4/c #8, 2,000 Volt, 90 Degree Celsius, Multi-Conductor Type W Cord (Carol Super Vu-Tron)	3.99	0.79
26 05 19 16-0191	LF	5/c #8, 2,000 Volt, 90 Degree Celsius, Multi-Conductor Type W Cord (Carol Super Vu-Tron)	4.67	0.79
26 05 19 16-0192		#6 AWG, 2,000 Volt, 90 Degree Celsius, Multi-Conductor Type W Cord *(26 05 19 16-0187)*		
26 05 19 16-0193	LF	3 Conductors, #6 AWG, 2,000 Volt, 90 Degree Celsius, Multi-Conductor Type W Cord (Carol Super Vu-Tron)	4.02	0.79
26 05 19 16-0194	LF	4 Conductors, #6 AWG, 2,000 Volt, 90 Degree Celsius, Multi-Conductor Type W Cord (Carol Super Vu-Tron)	4.78	0.90
26 05 19 16-0195	LF	5/c #6, 2,000 Volt, 90 Degree Celsius, Multi-Conductor Type W Cord (Carol Super Vu-Tron)	5.92	1.13
26 05 19 16-0196		#4 AWG, 2,000 Volt, 90 Degree Celsius, Multi-Conductor Type W Cord *(26 05 19 16-0187)*		
26 05 19 16-0197	LF	3 Conductors, #4 AWG, 2,000 Volt, 90 Degree Celsius, Multi-Conductor Type W Cord (Carol Super Vu-Tron)	5.28	0.79
26 05 19 16-0198	LF	4 Conductors, #4 AWG, 2,000 Volt, 90 Degree Celsius, Multi-Conductor Type W Cord (Carol Super Vu-Tron)	6.24	0.90
26 05 19 16-0199	LF	5 Conductors, #4 AWG, 2,000 Volt, 90 Degree Celsius, Multi-Conductor Type W Cord (Carol Super Vu-Tron)	7.96	1.13
26 05 19 16-0200		Cord Grips, Cable Reels, Extension Cords, And Accessories *(26 05 19 16-0012)*		
26 05 19 16-0201		Cord Grips *(26 05 19 16-0200)*		
26 05 19 16-0202	EA	Cord Grip With Watertight Connector For 1/2" NPT Zinc Plated Steel	72.23	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.51*	
26 05 19 16-0203	EA	Cord Grip With Watertight Connector For 3/4" NPT Zinc Plated Steel	72.67	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.51*	
26 05 19 16-0204		Cable Reels *(26 05 19 16-0200)* Note: Includes handling, mounting, electrical connections and installing cord.		
26 05 19 16-0205	EA	30', 16-3, SJO, Extension Cord Reel (Cox Reels PC10-3016-A)	688.25	56.40
26 05 19 16-0206	EA	50', 10-4, SEOOW, Extension Cord Reel (Reelcraft L 7050 104 X 1)	1,924.65	56.40
26 05 19 16-0207	EA	50', 16-3, SOOW, Extension Cord Reel (KH Industries RTFD3L-WW-B16K)	1,435.91	56.40

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 19 16-0208		**Extension Cords For Cable Reel** *(26 05 19 16-0200)*		
26 05 19 16-0209	EA	100 LF, 120 Volt, 12 Gauge, 3 Wire, Extension Cord	213.43	
26 05 19 16-0210	EA	100 LF, 240 Volt, 10 Gauge, 3 Wire, Extension Cord	305.82	
26 05 19 16-0211		**Plugs And Connector Bodies** *(26 05 19 16-0200)* Note: Up to 277 volt		
26 05 19 16-0212		**NEMA Twist-Lock Plugs** *(26 05 19 16-0211)*		
26 05 19 16-0213	EA	15 Amperes, 2 Pole 2 Wire, NEMA Twist-Lock Plug (Hubbell HBL7545C)	77.42	
26 05 19 16-0214	EA	15 Amperes, 2 Pole 3 Wire, NEMA Twist-Lock Plug (Hubbell HBL4770CBK)	79.04	
26 05 19 16-0215	EA	20 Amperes, 2 Pole 2 Wire, NEMA Twist-Lock Plug (Hubbell HBL7102C)	72.23	
26 05 19 16-0216	EA	20 Amperes, 2 Pole 3 Wire, NEMA Twist-Lock Plug (Hubbell HBL2331)	77.22	
26 05 19 16-0217	EA	20 Amperes, 3 Pole 4 Wire, NEMA Twist-Lock Plug (Hubbell HBL2411)	100.60	
26 05 19 16-0218	EA	20 Amperes, 4 Pole 4 Wire, NEMA Twist-Lock Plug (Hubbell HBL2441)	106.93	
26 05 19 16-0219	EA	20 Amperes, 4 Pole 5 Wire, NEMA Twist-Lock Plug (Hubbell HBL2511BK)	113.13	
26 05 19 16-0220	EA	30 Amperes, 2 Pole 3 Wire, NEMA Twist-Lock Plug (Hubbell HBL2611BK)	101.54	
26 05 19 16-0221	EA	30 Amperes, 3 Pole 4 Wire, NEMA Twist-Lock Plug (Hubbell HBL2711BK)	116.77	
26 05 19 16-0222	EA	30 Amperes, 4 Pole 4 Wire, NEMA Twist-Lock Plug (Hubbell HBL2761)	119.73	
26 05 19 16-0223	EA	30 Amperes, 4 Pole 5 Wire, NEMA Twist-Lock Plug (Hubbell HBL2811BK)	123.51	
26 05 19 16-0224		**NEMA Twist-Lock Connector Bodies** *(26 05 19 16-0211)*		
26 05 19 16-0225	EA	15 Amperes, 2 Pole 2 Wire, NEMA Twist-Lock Connector Body (Hubbell HBL7506C)	82.00	
26 05 19 16-0226	EA	15 Amperes, 2 Pole 3 Wire, NEMA Twist-Lock Connector Body (Hubbell HBL4779C)	87.73	
26 05 19 16-0227	EA	20 Amperes, 2 Pole 2 Wire, NEMA Twist-Lock Connector Body (Hubbell HBL7101C)	75.67	
26 05 19 16-0228	EA	20 Amperes, 2 Pole 3 Wire, NEMA Twist-Lock Connector Body (Hubbell HBL2323BK)	101.54	
26 05 19 16-0229	EA	20 Amperes, 3 Pole 4 Wire, NEMA Twist-Lock Connector Body (Hubbell HBL2413BK)	118.25	
26 05 19 16-0230	EA	20 Amperes, 4 Pole 4 Wire, NEMA Twist-Lock Connector Body (Hubbell HBL2443)	126.34	
26 05 19 16-0231	EA	20 Amperes, 4 Pole 5 Wire, NEMA Twist-Lock Connector Body (Hubbell HBL2513BK)	153.55	
26 05 19 16-0232	EA	30 Amperes, 2 Pole 3 Wire, NEMA Twist-Lock Connector Body (Hubbell HBL2623BK)	146.68	
26 05 19 16-0233	EA	30 Amperes, 3 Pole 4 Wire, NEMA Twist-Lock Connector Body (Hubbell HBL2713BK)	180.77	
26 05 19 16-0234	EA	30 Amperes, 4 Pole 4 Wire, NEMA Twist-Lock Connector Body (Hubbell HBL2753)	189.80	
26 05 19 16-0235	EA	30 Amperes, 4 Pole 5 Wire, NEMA Twist-Lock Connector Body (Hubbell HBL2813BK)	179.97	
26 05 19 16-0236		**Watertight Pin And Sleeve Plug** *(26 05 19 16-0211)*		
26 05 19 16-0237	EA	20 Amperes, 2 Pole, 3 Wire, 125 Volt, Watertight Pin And Sleeve Plug (Hubbell 320P4W)	285.75	33.84
26 05 19 16-0238	EA	20 Amperes, 2 Pole, 3 Wire, 250 Volt, Watertight Pin And Sleeve Plug (Hubbell 320P6W)	288.91	33.84
26 05 19 16-0239	EA	20 Amperes, 2 Pole, 3 Wire, 480 Volt, Watertight Pin And Sleeve Plug (Hubbell 320P7W)	313.47	33.84
26 05 19 16-0240	EA	20 Amperes, 3 Pole, 4 Wire, 125/250 Volt, Watertight Pin And Sleeve Plug (Hubbell 420P12W)	312.84	37.23
26 05 19 16-0241	EA	20 Amperes, 3 Pole, 4 Wire, 250 Volt, Watertight Pin And Sleeve Plug (Hubbell 420P9W)	308.07	37.23
26 05 19 16-0242	EA	20 Amperes, Pole, 4 Wire, 480 Volt, Watertight Pin And Sleeve Plug (Hubbell 420P7W)	309.49	37.23
26 05 19 16-0243	EA	30 Amperes, 2 Pole, 3 Wire, 125 Volt, Watertight Pin And Sleeve Plug (Hubbell 330P4W)	439.33	41.62
26 05 19 16-0244	EA	30 Amperes, 2 Pole, 3 Wire, 250 Volt, Watertight Pin And Sleeve Plug (Hubbell 330P6W)	427.47	41.62
26 05 19 16-0245	EA	30 Amperes, 2 Pole, 3 Wire, 480 Volt, Watertight Pin And Sleeve Plug (Hubbell 330P7W)	478.43	41.62
26 05 19 16-0246	EA	30 Amperes, 3 Pole, 4 Wire, 125/250 Volt, Watertight Pin And Sleeve Plug (Hubbell 430P12W)	468.40	45.69
26 05 19 16-0247	EA	30 Amperes, 3 Pole, 4 Wire, 250 Volt, Watertight Pin And Sleeve Plug (Hubbell 430P9W)	447.80	45.69
26 05 19 16-0248	EA	30 Amperes, 3 Pole, 4 Wire, 480 Volt, Watertight Pin And Sleeve Plug (Hubbell 430P7W)	461.97	45.69
26 05 19 16-0249	EA	60 Amperes, 2 Pole, 3 Wire, 125 Volt, Watertight Pin And Sleeve Plug (Hubbell 360P4W)	597.76	54.15
26 05 19 16-0250	EA	60 Amperes, 2 Pole, 3 Wire, 250 Volt, Watertight Pin And Sleeve Plug (Hubbell 360P6W)	609.06	54.15
26 05 19 16-0251	EA	60 Amperes, 2 Pole, 3 Wire, 480 Volt, Watertight Pin And Sleeve Plug (Hubbell 360P7W)	582.27	54.15
26 05 19 16-0252	EA	60 Amperes, 3 Pole, 4 Wire, 125/250 Volt, Watertight Pin And Sleeve Plug (Hubbell 460P12W)	663.60	60.23
26 05 19 16-0253	EA	60 Amperes, 3 Pole, 4 Wire, 250 Volt, Watertight Pin And Sleeve Plug (Hubbell 460P9W)	646.01	60.23
26 05 19 16-0254	EA	60 Amperes, 3 Pole, 4 Wire, 480 Volt, Watertight Pin And Sleeve Plug (Hubbell 460P7W)	653.62	60.23
26 05 19 16-0255	EA	100 Amperes, 2 Pole, 3 Wire, 250 Volt, Watertight Pin And Sleeve Plug (Hubbell 3100P6W)	822.60	67.68
26 05 19 16-0256	EA	100 Amperes, 2 Pole, 3 Wire, 480 Volt, Watertight Pin And Sleeve Plug (Hubbell 3100P7W)	866.24	67.68
26 05 19 16-0257	EA	100 Amperes, 3 Pole, 4 Wire, 125/250 Volt, Watertight Pin And Sleeve Plug (Hubbell 4100P12W)	841.63	74.45
26 05 19 16-0258	EA	100 Amperes, 3 Pole, 4 Wire, 250 Volt, Watertight Pin And Sleeve Plug (Hubbell 4100P9W)	826.72	74.45
26 05 19 16-0259	EA	100 Amperes, 3 Pole, 4 Wire, 480 Volt, Watertight Pin And Sleeve Plug (Hubbell 4100P7W)	834.77	74.45
26 05 19 16-0260		**Watertight Pin And Sleeve Connector** *(26 05 19 16-0211)*		
26 05 19 16-0261	EA	20 Amperes, 2 Pole, 3 Wire, 125 Volt, Watertight Pin And Sleeve Connector (Hubbell 320C4W)	303.94	33.84
26 05 19 16-0262	EA	20 Amperes, 2 Pole, 3 Wire, 250 Volt, Watertight Pin And Sleeve Connector (Hubbell 320C6W)	306.13	33.84
26 05 19 16-0263	EA	20 Amperes, 2 Pole, 3 Wire, 480 Volt, Watertight Pin And Sleeve Connector (Hubbell 320C7W)	362.68	33.84
26 05 19 16-0264	EA	20 Amperes, 3 Pole, 4 Wire, 125/250 Volt, Watertight Pin And Sleeve Connector (Hubbell 420C12W)	358.67	37.23
26 05 19 16-0265	EA	20 Amperes, 3 Pole, 4 Wire, 250 Volt, Watertight Pin And Sleeve Connector (Hubbell 420C9W)	352.93	37.23
26 05 19 16-0266	EA	20 Amperes, 3 Pole, 4 Wire, 480 Volt, Watertight Pin And Sleeve Connector (Hubbell 420C7W)	358.12	37.23
26 05 19 16-0267	EA	30 Amperes, 2 Pole, 3 Wire, 125 Volt, Watertight Pin And Sleeve Connector (Hubbell 330C4W)	450.20	41.62
26 05 19 16-0268	EA	30 Amperes, 2 Pole, 3 Wire, 250 Volt, Watertight Pin And Sleeve Connector (Hubbell 330C6W)	450.08	41.62
26 05 19 16-0269	EA	30 Amperes, 2 Pole, 3 Wire, 480 Volt, Watertight Pin And Sleeve Connector (Hubbell 330C7W)	469.59	41.62
26 05 19 16-0270	EA	30 Amperes, 3 Pole, 4 Wire, 125/250 Volt, Watertight Pin And Sleeve Connector (Hubbell 430C12W)	463.11	45.69
26 05 19 16-0271	EA	30 Amperes, 3 Pole, 4 Wire, 250 Volt, Watertight Pin And Sleeve Connector (Hubbell 430C9W)	467.12	45.69
26 05 19 16-0272	EA	30 Amperes, 3 Pole, 4 Wire, 480 Volt, Watertight Pin And Sleeve Connector (Hubbell 430C7W)	462.88	45.69
26 05 19 16-0273	EA	60 Amperes, 2 Pole, 3 Wire, 125 Volt, Watertight Pin And Sleeve Connector (Hubbell 360C4W)	709.23	54.15
26 05 19 16-0274	EA	60 Amperes, 2 Pole, 3 Wire, 250 Volt, Watertight Pin And Sleeve Connector (Hubbell 360C6W)	685.34	54.15
26 05 19 16-0275	EA	60 Amperes, 2 Pole, 3 Wire, 480 Volt, Watertight Pin And Sleeve Connector (Hubbell 360C7W)	671.11	54.15
26 05 19 16-0276	EA	60 Amperes, 3 Pole, 4 Wire, 125/250 Volt, Watertight Pin And Sleeve Connector (Hubbell 460C12W)	729.95	60.23
26 05 19 16-0277	EA	60 Amperes, 3 Pole, 4 Wire, 250 Volt, Watertight Pin And Sleeve Connector (Hubbell 460C9W)	750.71	60.23

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 19 16-0278	EA	60 Amperes, 3 Pole, 4 Wire, 480 Volt, Watertight Pin And Sleeve Connector (Hubbell 460C7W)	752.23	60.23
26 05 19 16-0279	EA	100 Amperes, 2 Pole, 3 Wire, 250 Volt, Watertight Pin And Sleeve Connector (Hubbell 3100C6W)	944.88	67.68
26 05 19 16-0280	EA	100 Amperes, 2 Pole, 3 Wire, 480 Volt, Watertight Pin And Sleeve Connector (Hubbell 3100C7W)	972.27	67.68
26 05 19 16-0281	EA	100 Amperes, 3 Pole, 4 Wire, 125/250 Volt, Watertight Pin And Sleeve Connector (Hubbell 4100C12W)	1,050.17	74.45
26 05 19 16-0282	EA	100 Amperes, 3 Pole, 4 Wire, 250 Volt, Watertight Pin And Sleeve Connector (Hubbell 4100C9W)	1,012.53	74.45
26 05 19 16-0283	EA	100 Amperes, 3 Pole, 4 Wire, 480 Volt, Watertight Pin And Sleeve Connector (Hubbell 4100C7W)	1,025.37	74.45

26 05 19 16-0284 Accessories *(26 05 19 16-0200)*

26 05 19 16-0285	EA	1/2" Straight Steel Cord Connector	62.98	11.28
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.77*	
26 05 19 16-0286	EA	1/2" Straight Nylon Cord Connector	37.13	8.46
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.08*	
26 05 19 16-0287	EA	1/2" 90 Degree Steel Cord Connector	71.64	14.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.46*	
26 05 19 16-0288	EA	1/2" 90 Degree Nylon Cord Connector	44.28	11.28
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.77*	
26 05 19 16-0289	EA	1/2" Straight Steel Cord Connector With Strain Relief Mesh	70.64	14.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.46*	
26 05 19 16-0290	EA	1/2" 90 Degree Steel Cord Connector With Strain Relief Mesh	125.07	16.92
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.15*	
26 05 19 16-0291	EA	1/2" Straight Nylon Cord Connector With Strain Relief Mesh	43.50	11.28
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.77*	
26 05 19 16-0292	EA	1/2" 90 Degree Nylon Cord Connector With Strain Relief Mesh	75.33	14.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.46*	
26 05 19 16-0293	EA	3/4" Straight Steel Cord Connector	65.81	11.28
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.77*	
26 05 19 16-0294	EA	3/4" Straight Nylon Cord Connector	38.55	8.46
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.08*	
26 05 19 16-0295	EA	3/4" 90 Degree Steel Cord Connector	80.53	14.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.46*	
26 05 19 16-0296	EA	3/4" 90 Degree Nylon Cord Connector	48.72	11.28
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.77*	
26 05 19 16-0297	EA	3/4" Straight Steel Cord Connector With Strain Relief Mesh	79.27	16.92
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.15*	
26 05 19 16-0298	EA	3/4" 90 Degree Steel Cord Connector With Strain Relief Mesh	94.43	19.74
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.84*	
26 05 19 16-0299	EA	3/4" Straight Nylon Cord Connector With Strain Relief Mesh	52.15	14.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.46*	
26 05 19 16-0300	EA	3/4" 90 Degree Nylon Cord Connector With Strain Relief Mesh	63.01	16.92
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.15*	
26 05 19 16-0301	EA	1" Straight Steel Cord Connector	84.07	11.28
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.77*	
26 05 19 16-0302	EA	1" Straight Nylon Cord Connector	47.68	8.46
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.08*	
26 05 19 16-0303	EA	1" 90 Degree Steel Cord Connector	92.59	14.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.46*	
26 05 19 16-0304	EA	1" 90 Degree Nylon Cord Connector	54.75	11.28
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.77*	
26 05 19 16-0305	EA	1" Straight Steel Cord Connector With Strain Relief Mesh	98.44	16.92
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.15*	
26 05 19 16-0306	EA	1" 90 Degree Steel Cord Connector With Strain Relief Mesh	107.08	19.74
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.84*	
26 05 19 16-0307	EA	1" Straight Nylon Cord Connector With Strain Relief Mesh	61.87	14.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.46*	
26 05 19 16-0308	EA	1" 90 Degree Nylon Cord Connector With Strain Relief Mesh	71.24	16.92
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.15*	

26 05 19 16-0309 600 Volt Wire *(26 05 19 16-0011)*

26 05 19 16-0310 Single Solid Conductor, Copper *(26 05 19 16-0309)*

26 05 19 16-0311	MLF	#14 AWG,Type THHN-THWN, 600 Volt, Copper, Single Solid Cable, Installed In Conduit	655.37	250.10
26 05 19 16-0312	MLF	#12 AWG, Type THHN-THWN, 600 Volt, Copper, Single Solid Cable, Installed In Conduit	828.74	294.21
26 05 19 16-0313	MLF	#10 AWG,Type THHN-THWN, 600 Volt, Copper, Single Solid Cable, Installed In Conduit	1,039.11	359.75
26 05 19 16-0314	MLF	#14 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Copper, Single Solid Cable, Installed In Conduit	858.58	250.10
26 05 19 16-0315	MLF	#12 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Copper, Single Solid Cable, Installed In Conduit	1,046.52	294.21
26 05 19 16-0316	MLF	#10 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Copper, Single Solid Cable, Installed In Conduit	1,269.37	359.75

26 05 19 16-0317 Power Cable, Stranded Conductor, Copper *(26 05 19 16-0309)*

26 05 19 16-0318 Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Single Stranded Conductor, Power Cable *(26 05 19 16-0317)*

26 05 19 16-0319	MLF	#16 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), 600 Volt Copper, Single Stranded, Power Cable, Installed In Conduit	707.96	206.10
26 05 19 16-0320	MLF	#14 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), 600 Volt Copper, Single Stranded, Power Cable, Installed In Conduit	831.37	247.33
26 05 19 16-0321	MLF	#12 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), 600 Volt Copper, Single Stranded, Power Cable, Installed In Conduit	1,040.80	288.55

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 19 16-0322	MLF	#10 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), 600 Volt Copper, Single Stranded, Power Cable, Installed In Conduit	1,308.29	329.76
26 05 19 16-0323	MLF	#8 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), 600 Volt, Copper, Single Stranded, Power Cable, Installed In Conduit	1,773.72	412.21
26 05 19 16-0324	MLF	#6 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), 600 Volt Copper, Single Stranded, Power Cable, Installed In Conduit	2,465.39	494.65
26 05 19 16-0325	MLF	#4 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), 600 Volt Copper, Single Stranded, Power Cable, Installed In Conduit	3,440.63	618.31
26 05 19 16-0326	MLF	#3 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), 600 Volt Copper, Single Stranded, Power Cable, Installed In Conduit	4,105.10	700.75
26 05 19 16-0327	MLF	#2 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), 600 Volt Copper, Single Stranded, Power Cable, Installed In Conduit	4,912.52	783.19
26 05 19 16-0328	MLF	#1 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), 600 Volt Copper, Single Stranded, Power Cable, Installed In Conduit	6,207.02	865.64
26 05 19 16-0329	MLF	1/0 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), 600 Volt Copper, Single Stranded, Power Cable, Installed In Conduit	7,501.88	989.29
26 05 19 16-0330	MLF	2/0 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), 600 Volt Copper, Single Stranded, Power Cable, Installed In Conduit	9,066.85	1,112.95
26 05 19 16-0331	MLF	3/0 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), 600 Volt Copper, Single Stranded, Power Cable, Installed In Conduit	10,959.00	1,236.62
26 05 19 16-0332	MLF	4/0 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), 600 Volt Copper, Single Stranded, Power Cable, Installed In Conduit	13,267.99	1,360.28
26 05 19 16-0333	MLF	250 MCM, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), 600 Volt Copper, Single Stranded, Power Cable, Installed In Conduit	14,013.77	1,483.95
26 05 19 16-0334	MLF	300 MCM, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), 600 Volt Copper, Single Stranded, Power Cable, Installed In Conduit	16,785.91	1,607.60
26 05 19 16-0335	MLF	350 MCM, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), 600 Volt Copper, Single Stranded, Power Cable, Installed In Conduit	17,888.58	1,731.26
26 05 19 16-0336	MLF	400 MCM, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), 600 Volt Copper, Single Stranded, Power Cable, Installed In Conduit	20,100.39	1,854.93
26 05 19 16-0337	MLF	500 MCM, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), 600 Volt Copper, Single Stranded, Power Cable, Installed In Conduit	23,463.70	1,978.59
26 05 19 16-0338	MLF	600 MCM, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), 600 Volt Copper, Single Stranded, Power Cable, Installed In Conduit	27,172.38	2,143.47
26 05 19 16-0339	MLF	750 MCM, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), 600 Volt Copper, Single Stranded, Power Cable, Installed In Conduit	42,269.76	2,390.79
26 05 19 16-0340	MLF	1,000 MCM, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), 600 Volt Copper, Single Stranded, Power Cable, Installed In Conduit	60,255.34	2,803.00

26 05 19 16-0341 Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Multi Stranded Conductor, Power Cable *(26 05 19 16-0317)*

26 05 19 16-0342	MLF	2 Conductors, #14 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	1,662.75	494.54
26 05 19 16-0343	MLF	3 Conductors, #14 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	2,081.92	577.19
26 05 19 16-0344	MLF	4 Conductors, #14 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	2,604.25	700.75
26 05 19 16-0345	MLF	6 Conductors, #14 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	3,184.03	762.27
26 05 19 16-0346	MLF	7 Conductors, #14 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	3,500.75	803.70
26 05 19 16-0347	MLF	9 Conductors, #14 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	4,132.61	886.03
26 05 19 16-0348	MLF	10 Conductors, #14 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	2,521.81	923.54
26 05 19 16-0349	MLF	12 Conductors, #14 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	5,081.59	1,009.90
26 05 19 16-0350	MLF	14 Conductors, #14 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	5,662.70	1,071.94
26 05 19 16-0351	MLF	24 Conductors, #14 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	8,514.55	1,360.38
26 05 19 16-0352	MLF	37 Conductors, #14 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	12,933.03	2,019.81
26 05 19 16-0353	MLF	2 Conductors, #12 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	2,081.85	577.19
26 05 19 16-0354	MLF	3 Conductors, #12 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	2,710.32	700.75
26 05 19 16-0355	MLF	4 Conductors, #12 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	3,338.80	824.41
26 05 19 16-0356	MLF	2 Conductors, #10 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	2,821.88	741.66
26 05 19 16-0357	MLF	3 Conductors, #10 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	3,716.82	906.03
26 05 19 16-0358	MLF	4 Conductors, #10 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	4,821.44	1,154.39
26 05 19 16-0359	MLF	6 Conductors, #10 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	6,614.38	1,484.46
26 05 19 16-0360	MLF	9 Conductors, #10 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	9,095.46	1,896.25
26 05 19 16-0361	MLF	2 Conductors, #8 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	3,598.94	845.02
26 05 19 16-0362	MLF	3 Conductors, #8 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	4,702.82	989.29

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 19 16-0363	MLF	4 Conductors, #8 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	6,115.85	1,257.23
26 05 19 16-0364	MLF	2 Conductors, #6 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	4,827.84	948.07
26 05 19 16-0365	MLF	3 Conductors, #6 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	6,623.29	1,174.79
26 05 19 16-0366	MLF	4 Conductors, #6 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	8,537.36	1,448.90
26 05 19 16-0367	MLF	2 Conductors, #4 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	6,665.29	1,150.26
26 05 19 16-0368	MLF	3 Conductors, #4 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	8,973.76	1,315.66
26 05 19 16-0369	MLF	4 Conductors, #4 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	11,683.88	1,641.82
26 05 19 16-0370	MLF	2 Conductors, #2 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	9,411.77	1,401.09
26 05 19 16-0371	MLF	3 Conductors, #2 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	12,780.59	1,566.79
26 05 19 16-0372	MLF	4 Conductors, #2 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	16,970.72	2,061.03
26 05 19 16-0373	MLF	3 Conductors, #1 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	17,074.46	1,978.28
26 05 19 16-0374	MLF	4 Conductors, #1 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	22,352.22	2,472.21
26 05 19 16-0375	MLF	3 Conductors, 1/0 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	20,445.55	2,143.88
26 05 19 16-0376	MLF	3 Conductors, 2/0 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	25,033.84	2,472.21
26 05 19 16-0377	MLF	3 Conductors, 3/0 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	30,812.85	2,884.20
26 05 19 16-0378	MLF	4 Conductors, 3/0 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	40,740.44	3,708.31
26 05 19 16-0379	MLF	3 Conductors, 4/0 AWG, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	37,853.06	3,300.43
26 05 19 16-0380	MLF	3 Conductors, 250 MCM, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	40,182.35	3,708.31
26 05 19 16-0381	MLF	3 Conductors, 350 MCM, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	50,986.34	4,122.06
26 05 19 16-0382	MLF	3 Conductors, 500 MCM, 600 Volt, Cross-linked High Heat-Resistant Water-Resistant (XHHW-2), Copper, Stranded, Power Cable, Installed In Conduit	66,877.56	4,530.35

26 05 19 16-0383 Underground Feeder And Branch Circuit Suitable, Single Stranded Copper

(26 05 19 16-0309)

Note: Direct bury.

26 05 19 16-0384	MLF	#14 AWG, Type USE, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	985.43
26 05 19 16-0385	MLF	#12 AWG, Type USE, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	1,161.43
26 05 19 16-0386	MLF	#10 AWG, Type USE, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	1,477.10
26 05 19 16-0387	MLF	#8 AWG, Type USE, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	1,957.80
26 05 19 16-0388	MLF	#6 AWG, Type USE, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	2,794.68
26 05 19 16-0389	MLF	#4 AWG, Type USE, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	3,703.30
26 05 19 16-0390	MLF	#2 AWG, Type USE, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	5,425.30
26 05 19 16-0391	MLF	#1 AWG, Type USE, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	6,818.55
26 05 19 16-0392	MLF	1/0 AWG, Type USE, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	8,410.09
26 05 19 16-0393	MLF	2/0 AWG, Type USE, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	10,245.14
26 05 19 16-0394	MLF	3/0 AWG, Type USE, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	12,417.19
26 05 19 16-0395	MLF	4/0 AWG, Type USE, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	14,050.49
26 05 19 16-0396	MLF	250 MCM, Type USE, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	15,208.56
26 05 19 16-0397	MLF	300 MCM, Type USE, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	18,315.24
26 05 19 16-0398	MLF	350 MCM, Type USE, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	20,519.28
26 05 19 16-0399	MLF	400 MCM, Type USE, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	23,110.60
26 05 19 16-0400	MLF	500 MCM, Type USE, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	27,510.80
26 05 19 16-0401	MLF	600 MCM, Type USE, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	32,588.33
26 05 19 16-0402	MLF	750 MCM, Type USE, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	52,481.77
26 05 19 16-0403	MLF	#14 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	822.74
26 05 19 16-0404	MLF	#12 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	994.99
26 05 19 16-0405	MLF	#10 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	1,208.29
26 05 19 16-0406	MLF	#8 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	1,473.78
26 05 19 16-0407	MLF	#6 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	1,933.87
26 05 19 16-0408	MLF	#4 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	2,614.22
26 05 19 16-0409	MLF	#2 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	3,610.11
26 05 19 16-0410	MLF	#1 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	4,337.26
26 05 19 16-0411	MLF	1/0 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	4,899.42
26 05 19 16-0412	MLF	2/0 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	5,524.14

copyright 2026 The Gordian Group, Inc.

	MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 19 16-0413		MLF	3/0 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	6,480.61	
26 05 19 16-0414		MLF	4/0 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	7,664.86	
26 05 19 16-0415		MLF	250 MCM, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	8,757.82	
26 05 19 16-0416		MLF	300 MCM, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	9,917.96	
26 05 19 16-0417		MLF	350 MCM, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	11,188.58	
26 05 19 16-0418		MLF	400 MCM, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	12,507.26	
26 05 19 16-0419		MLF	500 MCM, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	14,763.41	
26 05 19 16-0420		MLF	750 MCM, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	25,680.27	
26 05 19 16-0421		MLF	#14 AWG, Type THHN-THWN, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	688.57	
26 05 19 16-0422		MLF	#12 AWG, Type THHN-THWN, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	866.27	
26 05 19 16-0423		MLF	#10 AWG, Type THHN-THWN, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	1,093.85	
26 05 19 16-0424		MLF	#8 AWG, Type THHN-THWN, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	1,575.86	
26 05 19 16-0425		MLF	#6 AWG, Type THHN-THWN, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	2,205.62	
26 05 19 16-0426		MLF	#4 AWG, Type THHN-THWN, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	2,991.89	
26 05 19 16-0427		MLF	#2 AWG, Type THHN-THWN, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	4,352.00	
26 05 19 16-0428		MLF	#1 AWG, Type THHN-THWN, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	5,246.19	
26 05 19 16-0429		MLF	1/0 AWG, Type THHN-THWN, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	6,108.33	
26 05 19 16-0430		MLF	2/0 AWG, Type THHN-THWN, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	6,980.87	
26 05 19 16-0431		MLF	3/0 AWG, Type THHN-THWN, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	8,405.53	
26 05 19 16-0432		MLF	4/0 AWG, Type THHN-THWN, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	10,114.38	
26 05 19 16-0433		MLF	250 MCM, Type THHN-THWN, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	11,975.31	
26 05 19 16-0434		MLF	300 MCM, Type THHN-THWN, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	13,920.53	
26 05 19 16-0435		MLF	350 MCM, Type THHN-THWN, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	16,022.55	
26 05 19 16-0436		MLF	400 MCM, Type THHN-THWN, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	18,045.47	
26 05 19 16-0437		MLF	500 MCM, Type THHN-THWN, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	21,660.64	
26 05 19 16-0438		MLF	600 MCM, Type THHN-THWN, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	26,233.50	
26 05 19 16-0439		MLF	750 MCM, Type THHN-THWN, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	42,620.97	
26 05 19 16-0440		MLF	#2 AWG, Type Ethylene-Propylene Rubber (EPR) Insulation, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	6,895.93	
26 05 19 16-0441		MLF	1/0 AWG, Type Ethylene-Propylene Rubber (EPR) Insulation, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	10,061.96	
26 05 19 16-0442		MLF	2/0 AWG, Type Ethylene-Propylene Rubber (EPR) Insulation, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	11,154.17	
26 05 19 16-0443		MLF	3/0 AWG, Type Ethylene-Propylene Rubber (EPR) Insulation, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	12,702.25	
26 05 19 16-0444		MLF	4/0 AWG, Type Ethylene-Propylene Rubber (EPR) Insulation, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	14,133.96	
26 05 19 16-0445		MLF	250 MCM,Type Ethylene-Propylene Rubber (EPR) Insulation, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	15,210.20	
26 05 19 16-0446		MLF	350 MCM, Type Ethylene-Propylene Rubber (EPR) Insulation, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	22,283.30	
26 05 19 16-0447		MLF	400 MCM, Type Ethylene-Propylene Rubber (EPR) Insulation, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	24,257.44	
26 05 19 16-0448		MLF	500 MCM, Type Ethylene-Propylene Rubber (EPR) Insulation, 600 Volt, Underground Feeder And Branch Circuits, Single Stranded Copper Cable	27,829.16	

26 05 19 16-0449 600 Volt, Armored Cable, Copper Conductors *(26 05 19 16-0309)*

26 05 19 16-0450 ACTHH, Solid *(26 05 19 16-0449)*

26 05 19 16-0451		MLF	1 Conductor, #8 AWG, Type ACT, Solid, Armored Cable	2,589.09	676.80
26 05 19 16-0452		MLF	1 Conductor, #6 AWG, Type ACT, Solid, Armored Cable	2,994.11	767.04
26 05 19 16-0453		MLF	1 Conductor, #4 AWG, Type ACT, Solid, Armored Cable	3,464.88	812.16
26 05 19 16-0454		MLF	2 Conductors, #14 AWG, Type ACTHH, Solid, Armored Cable	3,643.76	1,128.00
26 05 19 16-0455		MLF	2 Conductors, #12 AWG, Type ACTHH, Solid, Armored Cable	3,871.66	1,263.14
26 05 19 16-0456		MLF	2 Conductors, #10 AWG, Type ACTHH, Solid, Armored Cable	5,020.07	1,399.52
26 05 19 16-0457		MLF	2 Conductors, #8 AWG, Type ACTHH, Solid, Armored Cable	6,735.93	1,534.65
26 05 19 16-0458		MLF	3 Conductors, #14 AWG, Type ACTHH, Solid, Armored Cable	4,465.80	1,263.14
26 05 19 16-0459		MLF	3 Conductors, #12 AWG, Type ACTHH, Solid, Armored Cable	4,633.35	1,399.52
26 05 19 16-0460		MLF	3 Conductors, #10 AWG, Type ACTHH, Solid, Armored Cable	6,049.10	1,579.89
26 05 19 16-0461		MLF	3 Conductors, #8 AWG, Type ACTHH, Solid, Armored Cable	8,057.99	1,714.34
26 05 19 16-0462		MLF	4 Conductors, #14 AWG, Type ACTHH, Solid, Armored Cable	5,388.31	1,399.52

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 19 16-0463	MLF	4 Conductors, #12 AWG, Type ACTHH, Solid, Armored Cable	5,877.04	1,579.89
26 05 19 16-0464	MLF	4 Conductors, #10 AWG, Type ACTHH, Solid, Armored Cable	7,626.69	1,759.80
26 05 19 16-0465	MLF	4 Conductors, #8 AWG, Type ACTHH, Solid, Armored Cable	10,122.51	1,895.84
26 05 19 16-0466		**ACTHH, Stranded** *(26 05 19 16-0449)*		
26 05 19 16-0467	MLF	2 Conductors, #8 AWG, Type ACTHH, Stranded, Armored Cable	6,962.59	1,625.35
26 05 19 16-0468	MLF	2 Conductors, #6 AWG, Type ACTHH, Stranded, Armored Cable	8,571.92	1,849.14
26 05 19 16-0469	MLF	3 Conductors, #8 AWG, Type ACTHH, Stranded, Armored Cable	8,284.28	1,804.81
26 05 19 16-0470	MLF	3 Conductors, #6 AWG, Type ACTHH, Stranded, Armored Cable	10,534.14	2,028.83
26 05 19 16-0471	MLF	3 Conductors, #4 AWG, Type ACTHH, Stranded, Armored Cable	13,522.95	2,256.01
26 05 19 16-0472	MLF	3 Conductors, #3 AWG, Type ACTHH, Stranded, Armored Cable	15,618.11	2,479.13
26 05 19 16-0473	MLF	3 Conductors, #2 AWG, Type ACTHH, Stranded, Armored Cable	17,980.69	2,705.06
26 05 19 16-0474	MLF	4 Conductors, #8 AWG, Type ACTHH, Stranded, Armored Cable	10,795.70	2,165.09
26 05 19 16-0475	MLF	4 Conductors, #6 AWG, Type ACTHH, Stranded, Armored Cable	13,213.90	2,389.79
26 05 19 16-0476	MLF	4 Conductors, #4 AWG, Type ACTHH, Stranded, Armored Cable	17,282.60	2,617.20
26 05 19 16-0477	MLF	4 Conductors, #3 AWG, Type ACTHH, Stranded, Armored Cable	18,956.95	2,841.33
26 05 19 16-0478	MLF	4 Conductors, #2 AWG, Type ACTHH, Stranded, Armored Cable	22,682.19	3,065.24
26 05 19 16-0479		**HCFC, Solid** *(26 05 19 16-0449)*		
26 05 19 16-0480	MLF	2 Conductors, #14 AWG, Type HCF, Solid, Armored Cable	4,161.18	1,128.00
26 05 19 16-0481	MLF	2 Conductors, #12 AWG, Type HCF, Solid, Armored Cable	4,536.10	1,267.42
26 05 19 16-0482	MLF	2 Conductors, #10 AWG, Type HCF, Solid, Armored Cable	5,085.13	1,392.63
26 05 19 16-0483	MLF	3 Conductors, #14 AWG, Type HCF, Solid, Armored Cable	5,106.30	1,267.42
26 05 19 16-0484	MLF	3 Conductors, #12 AWG, Type HCF, Solid, Armored Cable	5,458.24	1,392.63
26 05 19 16-0485	MLF	3 Conductors, #10 AWG, Type HCF, Solid, Armored Cable	7,282.88	1,588.80
26 05 19 16-0486	MLF	4 Conductors, #14 AWG, Type HCF, Solid, Armored Cable	6,376.09	1,392.63
26 05 19 16-0487	MLF	4 Conductors, #12 AWG, Type HCF, Solid, Armored Cable	6,924.94	1,588.80
26 05 19 16-0488	MLF	4 Conductors, #10 AWG, Type HCF, Solid, Armored Cable	9,720.46	1,762.51
26 05 19 16-0489		**MC, Solid Or Stranded, Galvanized Steel Armor** *(26 05 19 16-0449)*		
26 05 19 16-0490	MLF	2 Conductors, #14 AWG, Type MC, Solid Or Stranded, Galvanized Steel Armored Cable	4,066.78	1,128.00
26 05 19 16-0491	MLF	2 Conductors, #12 AWG, Type MC, Solid Or Stranded, Galvanized Steel Armored Cable	4,524.57	1,267.42
26 05 19 16-0492	MLF	2 Conductors, #10 AWG, Type MC, Solid Or Stranded, Galvanized Steel Armored Cable	5,748.96	1,392.63
26 05 19 16-0493	MLF	2 Conductors, #8 AWG, Type MC, Solid Or Stranded, Galvanized Steel Armored Cable	8,045.79	1,488.18
26 05 19 16-0494	MLF	2 Conductors, #6 AWG, Type MC, Solid Or Stranded, Galvanized Steel Armored Cable	10,669.98	1,577.63
26 05 19 16-0495	MLF	3 Conductors, #14 AWG, Type MC, Solid Or Stranded, Galvanized Steel Armored Cable	4,781.05	1,267.42
26 05 19 16-0496	MLF	3 Conductors, #12 AWG, Type MC, Solid Or Stranded, Galvanized Steel Armored Cable	5,482.98	1,392.63
26 05 19 16-0497	MLF	3 Conductors, #10 AWG, Type MC, Solid Or Stranded, Galvanized Steel Armored Cable	7,396.31	1,588.80
26 05 19 16-0498	MLF	3 Conductors, #8 AWG, Type MC, Solid Or Stranded, Galvanized Steel Armored Cable	10,443.11	1,714.34
26 05 19 16-0499	MLF	3 Conductors, #6 AWG, Type MC, Solid Or Stranded, Galvanized Steel Armored Cable	12,582.36	1,849.14
26 05 19 16-0500	MLF	3 Conductors, #4 AWG, Type MC, Solid Or Stranded, Galvanized Steel Armored Cable	16,288.81	1,985.96
26 05 19 16-0501	MLF	3 Conductors, #2 AWG, Type MC, Solid Or Stranded, Galvanized Steel Armored Cable	24,021.80	2,120.31
26 05 19 16-0502	MLF	4 Conductors, #14 AWG, Type MC, Solid Or Stranded, Galvanized Steel Armored Cable	5,725.69	1,392.63
26 05 19 16-0503	MLF	4 Conductors, #12 AWG, Type MC, Solid Or Stranded, Galvanized Steel Armored Cable	6,575.11	1,588.80
26 05 19 16-0504	MLF	4 Conductors, #10 AWG, Type MC, Solid Or Stranded, Galvanized Steel Armored Cable	11,455.72	1,762.51
26 05 19 16-0505	MLF	4 Conductors, #8 AWG, Type MC, Solid Or Stranded, Galvanized Steel Armored Cable	16,608.99	1,941.52
26 05 19 16-0506	MLF	4 Conductors, #6 AWG, Type MC, Solid Or Stranded, Galvanized Steel Armored Cable	21,004.81	2,077.33
26 05 19 16-0507	MLF	4 Conductors, #4 AWG, Type MC, Solid Or Stranded, Galvanized Steel Armored Cable	28,982.95	2,211.79
26 05 19 16-0508	MLF	4 Conductors, #2 AWG, Type MC, Solid Or Stranded, Galvanized Steel Armored Cable	38,668.31	2,345.12
26 05 19 16-0509		**MC, Solid Or Stranded, Aluminum Armor** *(26 05 19 16-0449)*		
26 05 19 16-0510	MLF	2 Conductors, #14 AWG, Type MC, Solid Or Stranded, Aluminum Armored Cable	4,011.59	1,128.00
26 05 19 16-0511	MLF	2 Conductors, #12 AWG, Type MC, Solid Or Stranded, Aluminum Armored Cable	4,381.47	1,267.42
26 05 19 16-0512	MLF	2 Conductors, #10 AWG, Type MC, Solid Or Stranded, Aluminum Armored Cable	5,622.38	1,392.63
26 05 19 16-0513	MLF	3 Conductors, #14 AWG, Type MC, Solid Or Stranded, Aluminum Armored Cable	5,011.55	1,267.42
26 05 19 16-0514	MLF	3 Conductors, #12 AWG, Type MC, Solid Or Stranded, Aluminum Armored Cable	5,355.83	1,392.63
26 05 19 16-0515	MLF	3 Conductors, #10 AWG, Type MC, Solid Or Stranded, Aluminum Armored Cable	7,295.76	1,588.80
26 05 19 16-0516	MLF	4 Conductors, #14 AWG, Type MC, Solid Or Stranded, Aluminum Armored Cable	6,821.51	1,392.63
26 05 19 16-0517	MLF	4 Conductors, #12 AWG, Type MC, Solid Or Stranded, Aluminum Armored Cable	7,369.33	1,588.80
26 05 19 16-0518	MLF	4 Conductors, #10 AWG, Type MC, Solid Or Stranded, Aluminum Armored Cable	11,455.72	1,762.51
26 05 19 16-0519		**FPLP Solid TFN Red Armored Cable** *(26 05 19 16-0449)* Note: Color coded red.		
26 05 19 16-0520	MLF	#18/2 With Bare #18 Ground Type TFN FPLP Red Armored Cable	3,939.57	857.28
26 05 19 16-0521	MLF	#18/4 With Bare #18 Ground Type TFN FPLP Red Armored Cable	4,459.97	992.64
26 05 19 16-0522	MLF	#18/6 With Bare #18 Ground Type TFN FPLP Red Armored Cable	5,602.85	1,128.00
26 05 19 16-0523	MLF	#18/8 With Bare #18 Ground Type TFN FPLP Red Armored Cable	6,448.50	1,263.37
26 05 19 16-0524	MLF	#16/2 With Bare #16 Ground Type TFN FPLP Red Armored Cable	4,471.82	992.64
26 05 19 16-0525	MLF	#16/4 With Bare #16 Ground Type TFN FPLP Red Armored Cable	5,318.54	1,128.00
26 05 19 16-0526	MLF	#16/6 With Bare #16 Ground Type TFN FPLP Red Armored Cable	6,789.89	1,263.37
26 05 19 16-0527	MLF	#16/8 With Bare #16 Ground Type TFN FPLP Red Armored Cable	7,751.86	1,398.73
26 05 19 16-0528		**FPLP Solid THHN Red Armored Cable** *(26 05 19 16-0449)* Note: Color coded red.		

copyright 2026 The Gordian Group, Inc.

	MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 19 16-0529		MLF	#14/2 With #14 Ground Type THHN FPLP Red Armored Cable	4,949.14	1,128.00
26 05 19 16-0530		MLF	#14/4 With #14 Ground Type THHN FPLP Red Armored Cable	6,244.95	1,263.37
26 05 19 16-0531		MLF	#14/6 With #14 Ground Type THHN FPLP Red Armored Cable	8,513.26	1,398.73
26 05 19 16-0532		MLF	#14/8 With #14 Ground Type THHN FPLP Red Armored Cable	9,933.99	1,534.09
26 05 19 16-0533		MLF	#12/2 With #12 Ground Type THHN FPLP Red Armored Cable	6,359.11	1,263.37
26 05 19 16-0534		MLF	#12/4 With #12 Ground Type THHN FPLP Red Armored Cable	7,887.55	1,398.73
26 05 19 16-0535			**FPLP Twisted Shielded Pair Red Armored Cable** *(26 05 19 16-0449)*		
			Note: Color coded red.		
26 05 19 16-0536		MLF	#18/2 With #18 Tinned Ground FPLP Twisted Shielded Pair Red Armored Cable	4,327.27	857.28
26 05 19 16-0537		MLF	#18/2 With #18 Tinned Ground And #14/2 With #14 Tinned Ground FPLP Twisted Shielded Pair Red Armored Cable	7,013.90	1,263.37
26 05 19 16-0538		MLF	#16/2 With #16 Tinned Ground FPLP Twisted Shielded Pair Red Armored Cable	5,366.76	992.64
26 05 19 16-0539		MLF	#16/4 With Two #16 Tinned Grounds FPLP Twisted Shielded Pair Red Armored Cable	6,371.80	1,128.00
26 05 19 16-0540		MLF	#16/2 With #16 Tinned Ground And #12/2 With #12 Ground FPLP Twisted Shielded Pair Red Armored Cable	8,983.89	1,398.73
26 05 19 16-0541		MLF	#14/2 With One #16 Tinned Ground And One #14 Ground FPLP Twisted Shielded Pair Red Armored Cable	6,278.91	1,173.12
26 05 19 16-0542		MLF	#14/4 With Two #16 Tinned Ground And One #14 Ground FPLP Twisted Shielded Pair Red Armored Cable	7,826.45	1,353.61
26 05 19 16-0543			**Armored Cable Connectors** *(26 05 19 16-0449)*		
26 05 19 16-0544		EA	3/4" Armored Cable Connector	6.99	2.48
			For Work In Restricted Working Space, Add	*1.86*	
			For Elevated Installation >10' To 15' Above Floor, Add	*0.62*	
			For Elevated Installation >15' To 20' Above Floor, Add	*1.24*	
			For Elevated Installation >20' To 25' Above Floor, Add	*1.55*	
			For Elevated Installation >25' To 30' Above Floor, Add	*2.17*	
			For Elevated Installation >30' To 35' Above Floor, Add	*2.48*	
			For Elevated Installation >35' To 40' Above Floor, Add	*3.10*	
			For Elevated Installation >40' Above Floor, Add	*3.40*	
			For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1.86*	
26 05 19 16-0545		EA	1" Armored Cable Connector	9.32	3.30
			For Work In Restricted Working Space, Add	*2.47*	
			For Elevated Installation >10' To 15' Above Floor, Add	*0.82*	
			For Elevated Installation >15' To 20' Above Floor, Add	*1.65*	
			For Elevated Installation >20' To 25' Above Floor, Add	*2.06*	
			For Elevated Installation >25' To 30' Above Floor, Add	*2.88*	
			For Elevated Installation >30' To 35' Above Floor, Add	*3.30*	
			For Elevated Installation >35' To 40' Above Floor, Add	*4.12*	
			For Elevated Installation >40' Above Floor, Add	*4.53*	
			For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.47*	
26 05 19 16-0546		EA	1-1/4" Armored Cable Connector	11.74	4.12
			For Work In Restricted Working Space, Add	*3.09*	
			For Elevated Installation >10' To 15' Above Floor, Add	*1.03*	
			For Elevated Installation >15' To 20' Above Floor, Add	*2.06*	
			For Elevated Installation >20' To 25' Above Floor, Add	*2.58*	
			For Elevated Installation >25' To 30' Above Floor, Add	*3.61*	
			For Elevated Installation >30' To 35' Above Floor, Add	*4.12*	
			For Elevated Installation >35' To 40' Above Floor, Add	*5.16*	
			For Elevated Installation >40' Above Floor, Add	*5.67*	
			For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.09*	
26 05 19 16-0547			**600 Volt, Feeder Wire, Single Stranded Copper** *(26 05 19 16-0309)*		
26 05 19 16-0548		MLF	#12 AWG, Type THW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	918.50	250.21
26 05 19 16-0549		MLF	#10 AWG, Type THW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	1,172.35	294.21
26 05 19 16-0550		MLF	#8 AWG, Type THW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	1,712.46	400.15
26 05 19 16-0551		MLF	#6 AWG, Type THW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	2,431.45	478.98
26 05 19 16-0552		MLF	#4 AWG, Type THW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	3,339.90	558.44
26 05 19 16-0553		MLF	#2 AWG, Type THW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	4,899.69	719.41
26 05 19 16-0554		MLF	#1 AWG, Type THW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	5,938.84	800.40
26 05 19 16-0555		MLF	1/0 AWG, Type THW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	6,917.43	901.80
26 05 19 16-0556		MLF	2/0 AWG, Type THW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	7,930.40	1,000.42
26 05 19 16-0557		MLF	3/0 AWG, Type THW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	9,611.72	1,123.36
26 05 19 16-0558		MLF	4/0 AWG, Type THW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	11,615.41	1,239.30
26 05 19 16-0559		MLF	250 MCM, Type THW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	13,803.22	1,362.34
26 05 19 16-0560		MLF	300 MCM, Type THW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	16,093.07	1,489.09
26 05 19 16-0561		MLF	350 MCM, Type THW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	18,572.76	1,600.69
26 05 19 16-0562		MLF	400 MCM, Type THW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	20,956.69	1,778.56
26 05 19 16-0563		MLF	500 MCM, Type THW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	25,268.32	1,960.04
26 05 19 16-0564		MLF	#14 AWG, XLPE-USE-RHH-RHW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	963.81	165.19
			For Ethylene-Propylene Rubber (EPR) Insulation, Add	*51.83*	
			For Chlorosulfonated Polyethylene (CSPE) Synthetic Rubber Jacket, Add	*120.93*	
26 05 19 16-0565		MLF	#12 AWG, XLPE-USE-RHH-RHW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	1,073.56	182.92
			For Ethylene-Propylene Rubber (EPR) Insulation, Add	*52.83*	
			For Chlorosulfonated Polyethylene (CSPE) Synthetic Rubber Jacket, Add	*123.27*	
26 05 19 16-0566		MLF	#10 AWG, XLPE-USE-RHH-RHW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	1,338.61	228.67
			For Ethylene-Propylene Rubber (EPR) Insulation, Add	*77.13*	
			For Chlorosulfonated Polyethylene (CSPE) Synthetic Rubber Jacket, Add	*179.97*	
26 05 19 16-0567		MLF	#8 AWG, XLPE-USE-RHH-RHW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	1,875.87	363.77
			For Ethylene-Propylene Rubber (EPR) Insulation, Add	*126.80*	
			For Chlorosulfonated Polyethylene (CSPE) Synthetic Rubber Jacket, Add	*295.87*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 19 16-0568	MLF	#6 AWG, XLPE-USE-RHH-RHW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	2,657.13	436.52
		For Ethylene-Propylene Rubber (EPR) Insulation, Add	*213.08*	
		For Chlorosulfonated Polyethylene (CSPE) Synthetic Rubber Jacket, Add	*497.18*	
26 05 19 16-0569	MLF	#4 AWG, XLPE-USE-RHH-RHW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	3,694.83	506.81
		For Ethylene-Propylene Rubber (EPR) Insulation, Add	*322.36*	
		For Chlorosulfonated Polyethylene (CSPE) Synthetic Rubber Jacket, Add	*752.17*	
26 05 19 16-0570	MLF	#3 AWG, XLPE-USE-RHH-RHW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	4,221.67	580.08
		For Ethylene-Propylene Rubber (EPR) Insulation, Add	*370.47*	
		For Chlorosulfonated Polyethylene (CSPE) Synthetic Rubber Jacket, Add	*864.43*	
26 05 19 16-0571	MLF	#2 AWG, XLPE-USE-RHH-RHW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	5,448.34	653.35
		For Ethylene-Propylene Rubber (EPR) Insulation, Add	*523.55*	
		For Chlorosulfonated Polyethylene (CSPE) Synthetic Rubber Jacket, Add	*1,221.63*	
26 05 19 16-0572	MLF	#1 AWG, XLPE-USE-RHH-RHW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	6,880.12	727.65
		For Ethylene-Propylene Rubber (EPR) Insulation, Add	*707.41*	
		For Chlorosulfonated Polyethylene (CSPE) Synthetic Rubber Jacket, Add	*1,650.62*	
26 05 19 16-0573	MLF	1/0 AWG, XLPE-USE-RHH-RHW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	8,363.26	820.90
		For Ethylene-Propylene Rubber (EPR) Insulation, Add	*883.50*	
		For Chlorosulfonated Polyethylene (CSPE) Synthetic Rubber Jacket, Add	*2,061.51*	
26 05 19 16-0574	MLF	2/0 AWG, XLPE-USE-RHH-RHW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	10,186.27	910.36
		For Ethylene-Propylene Rubber (EPR) Insulation, Add	*1,110.58*	
		For Chlorosulfonated Polyethylene (CSPE) Synthetic Rubber Jacket, Add	*2,591.36*	
26 05 19 16-0575	MLF	3/0 AWG, XLPE-USE-RHH-RHW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	12,343.61	1,016.30
		For Ethylene-Propylene Rubber (EPR) Insulation, Add	*1,387.81*	
		For Chlorosulfonated Polyethylene (CSPE) Synthetic Rubber Jacket, Add	*3,238.22*	
26 05 19 16-0576	MLF	4/0 AWG, XLPE-USE-RHH-RHW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	13,966.52	1,129.96
		For Ethylene-Propylene Rubber (EPR) Insulation, Add	*1,584.87*	
		For Chlorosulfonated Polyethylene (CSPE) Synthetic Rubber Jacket, Add	*3,698.04*	
26 05 19 16-0577	MLF	250 MCM, XLPE-USE-RHH-RHW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	14,829.15	1,239.30
		For Ethylene-Propylene Rubber (EPR) Insulation, Add	*1,667.90*	
		For Chlorosulfonated Polyethylene (CSPE) Synthetic Rubber Jacket, Add	*3,891.76*	
26 05 19 16-0578	MLF	300 MCM, XLPE-USE-RHH-RHW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	17,677.25	1,362.34
		For Ethylene-Propylene Rubber (EPR) Insulation, Add	*2,048.74*	
		For Chlorosulfonated Polyethylene (CSPE) Synthetic Rubber Jacket, Add	*4,780.39*	
26 05 19 16-0579	MLF	350 MCM, XLPE-USE-RHH-RHW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	19,796.72	1,444.27
		For Ethylene-Propylene Rubber (EPR) Insulation, Add	*2,320.28*	
		For Chlorosulfonated Polyethylene (CSPE) Synthetic Rubber Jacket, Add	*5,414.00*	
26 05 19 16-0580	MLF	400 MCM, XLPE-USE-RHH-RHW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	22,286.16	1,614.20
		For Ethylene-Propylene Rubber (EPR) Insulation, Add	*2,647.33*	
		For Chlorosulfonated Polyethylene (CSPE) Synthetic Rubber Jacket, Add	*6,177.10*	
26 05 19 16-0581	MLF	500 MCM, XLPE-USE-RHH-RHW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	25,641.45	1,795.26
		For Ethylene-Propylene Rubber (EPR) Insulation, Add	*3,104.25*	
		For Chlorosulfonated Polyethylene (CSPE) Synthetic Rubber Jacket, Add	*7,243.24*	
26 05 19 16-0582	MLF	600 MCM, XLPE-USE-RHH-RHW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	30,237.99	1,867.80
		For Ethylene-Propylene Rubber (EPR) Insulation, Add	*3,731.90*	
		For Chlorosulfonated Polyethylene (CSPE) Synthetic Rubber Jacket, Add	*8,707.76*	
26 05 19 16-0583	MLF	750 MCM, XLPE-USE-RHH-RHW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	50,406.24	1,940.25
		For Ethylene-Propylene Rubber (EPR) Insulation, Add	*6,664.39*	
		For Chlorosulfonated Polyethylene (CSPE) Synthetic Rubber Jacket, Add	*15,550.24*	
26 05 19 16-0584	MLF	1,000 MCM, XLPE-USE-RHH-RHW, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	64,034.55	2,073.19
		For Ethylene-Propylene Rubber (EPR) Insulation, Add	*8,646.80*	
		For Chlorosulfonated Polyethylene (CSPE) Synthetic Rubber Jacket, Add	*20,175.88*	
26 05 19 16-0585	MLF	#16 AWG, Type SFF-2, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	1,704.64	370.78
26 05 19 16-0586	MLF	#14 AWG, Type SFF-2, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	2,184.95	412.21
26 05 19 16-0587	MLF	#12 AWG, Type SFF-2, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	2,765.72	495.06
26 05 19 16-0588	MLF	#10 AWG, Type SFF-2, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	3,288.56	576.89
26 05 19 16-0589	MLF	#8 AWG, Type SFF-2, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	5,148.29	617.69
26 05 19 16-0590	MLF	#18 AWG, Type TFFN, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	531.88	206.10
26 05 19 16-0591	MLF	#16 AWG, Type TFFN, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	662.55	226.71
26 05 19 16-0592	MLF	#14 AWG, Type THHN-THWN, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	680.32	165.29
26 05 19 16-0593	MLF	#12 AWG, Type THHN-THWN, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	854.47	197.04
26 05 19 16-0594	MLF	#10 AWG, Type THHN-THWN, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	1,076.15	247.84
26 05 19 16-0595	MLF	#8 AWG, Type THHN-THWN, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	1,544.98	326.67
26 05 19 16-0596	MLF	#6 AWG, Type THHN-THWN, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	2,154.57	394.48
26 05 19 16-0597	MLF	#4 AWG, Type THHN-THWN, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	2,913.22	466.20
26 05 19 16-0598	MLF	#3 AWG, Type THHN-THWN, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	3,504.60	527.72
26 05 19 16-0599	MLF	#2 AWG, Type THHN-THWN, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	4,228.18	591.00
26 05 19 16-0600	MLF	#1 AWG, Type THHN-THWN, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	5,089.61	666.95
26 05 19 16-0601	MLF	1/0 AWG, Type THHN-THWN, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	5,925.42	730.33
26 05 19 16-0602	MLF	2/0 AWG, Type THHN-THWN, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	6,766.22	807.10
26 05 19 16-0603	MLF	3/0 AWG, Type THHN-THWN, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	8,132.85	853.68
26 05 19 16-0604	MLF	4/0 AWG, Type THHN-THWN, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	9,775.05	960.43
26 05 19 16-0605	MLF	250 MCM, Type THHN-THWN, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	11,562.09	1,021.75
26 05 19 16-0606	MLF	300 MCM, Type THHN-THWN, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	13,429.40	1,157.16
26 05 19 16-0607	MLF	350 MCM, Type THHN-THWN, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	15,446.05	1,280.62
26 05 19 16-0608	MLF	400 MCM, Type THHN-THWN, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	17,387.38	1,315.66
26 05 19 16-0609	MLF	500 MCM, Type THHN-THWN, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	20,845.10	1,391.91
26 05 19 16-0610	MLF	600 MCM, Type THHN-THWN, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	26,130.45	1,638.01
26 05 19 16-0611	MLF	750 MCM, Type THHN-THWN, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	40,856.37	1,940.25
26 05 19 16-0612	MLF	1,000 MCM, Type THHN-THWN, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	49,063.68	2,342.56
26 05 19 16-0613	MLF	#16 AWG, Type TGGT High Temperature, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	2,836.66	495.06
26 05 19 16-0614	MLF	#14 AWG, Type TGGT High Temperature, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	3,138.50	576.89
26 05 19 16-0615	MLF	#12 AWG, Type TGGT High Temperature, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	3,641.56	660.04
26 05 19 16-0616	MLF	#10 AWG, Type TGGT High Temperature, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	4,792.17	741.66
26 05 19 16-0617	MLF	#8 AWG, Type TGGT High Temperature, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	5,438.89	824.41

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 19 16-0618	MLF	#6 AWG, Type TGGT High Temperature, 600 Volt, Copper, Single Stranded Cable, Installed In Conduit	7,011.70	906.03
26 05 19 16-0619		**600 Volt, Single Stranded Copper, Low Smoke Zero Halogen** *(26 05 19 16-0309)*		
26 05 19 16-0620	MLF	#14 AWG, Low Smoke Zero Halogen (LSZH), 600 Volt, Single Stranded Copper Cable, Installed In Conduit	744.65	165.29
26 05 19 16-0621	MLF	#12 AWG, Low Smoke Zero Halogen (LSZH), 600 Volt, Single Stranded Copper Cable, Installed In Conduit	966.65	197.04
26 05 19 16-0622	MLF	#10 AWG, Low Smoke Zero Halogen (LSZH), 600 Volt, Single Stranded Copper Cable, Installed In Conduit	1,331.91	247.84
26 05 19 16-0623	MLF	#8 AWG, Low Smoke Zero Halogen (LSZH), 600 Volt, Single Stranded Copper Cable, Installed In Conduit	2,056.46	326.67
26 05 19 16-0624	MLF	#6 AWG, Low Smoke Zero Halogen (LSZH), 600 Volt, Single Stranded Copper Cable, Installed In Conduit	3,035.86	394.48
26 05 19 16-0625	MLF	#4 AWG, Low Smoke Zero Halogen (LSZH), 600 Volt, Single Stranded Copper Cable, Installed In Conduit	4,006.51	466.20
26 05 19 16-0626	MLF	#3 AWG, Low Smoke Zero Halogen (LSZH), 600 Volt, Single Stranded Copper Cable, Installed In Conduit	4,855.80	527.72
26 05 19 16-0627	MLF	#2 AWG, Low Smoke Zero Halogen (LSZH), 600 Volt, Single Stranded Copper Cable, Installed In Conduit	5,948.38	591.00
26 05 19 16-0628	MLF	#1 AWG, Low Smoke Zero Halogen (LSZH), 600 Volt, Single Stranded Copper Cable, Installed In Conduit	6,835.28	666.95
26 05 19 16-0629	MLF	1/0 AWG, Low Smoke Zero Halogen (LSZH), 600 Volt, Single Stranded Copper Cable, Installed In Conduit	7,862.85	730.33
26 05 19 16-0630	MLF	2/0 AWG, Low Smoke Zero Halogen (LSZH), 600 Volt, Single Stranded Copper Cable, Installed In Conduit	9,102.05	807.10
26 05 19 16-0631	MLF	3/0 AWG, Low Smoke Zero Halogen (LSZH), 600 Volt, Single Stranded Copper Cable, Installed In Conduit	11,133.73	853.68
26 05 19 16-0632	MLF	4/0 AWG, Low Smoke Zero Halogen (LSZH), 600 Volt, Single Stranded Copper Cable, Installed In Conduit	13,600.33	960.43
26 05 19 16-0633	MLF	250 MCM, Low Smoke Zero Halogen (LSZH), 600 Volt, Single Stranded Copper Cable, Installed In Conduit	15,545.38	1,021.75
26 05 19 16-0634	MLF	300 MCM, Low Smoke Zero Halogen (LSZH), 600 Volt, Single Stranded Copper Cable, Installed In Conduit	18,333.18	1,157.16
26 05 19 16-0635	MLF	350 MCM, Low Smoke Zero Halogen (LSZH), 600 Volt, Single Stranded Copper Cable, Installed In Conduit	21,325.81	1,280.62
26 05 19 16-0636	MLF	400 MCM, Low Smoke Zero Halogen (LSZH), 600 Volt, Single Stranded Copper Cable, Installed In Conduit	23,428.56	1,315.66
26 05 19 16-0637	MLF	500 MCM, Low Smoke Zero Halogen (LSZH), 600 Volt, Single Stranded Copper Cable, Installed In Conduit	28,436.78	1,391.91
26 05 19 16-0638	MLF	600 MCM, Low Smoke Zero Halogen (LSZH), 600 Volt, Single Stranded Copper Cable, Installed In Conduit	34,003.84	1,638.01
26 05 19 16-0639	MLF	750 MCM, Low Smoke Zero Halogen (LSZH), 600 Volt, Single Stranded Copper Cable, Installed In Conduit	44,497.21	1,940.25
26 05 19 16-0640	MLF	1,000 MCM, Low Smoke Zero Halogen (LSZH), 600 Volt, Single Stranded Copper Cable, Installed In Conduit	58,092.75	2,342.56
26 05 19 16-0641		**600 Volt, Feeder Wire, Single Stranded Aluminum** *(26 05 19 16-0309)*		
26 05 19 16-0642	MLF	#6 AWG,Type THHN-THWN, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	1,305.71	326.16
26 05 19 16-0643	MLF	#4 AWG, Type THHN-THWN, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	1,552.52	379.26
26 05 19 16-0644	MLF	#2 AWG, Type THHN-THWN, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	2,037.40	486.84
26 05 19 16-0645	MLF	#1 AWG,Type THHN-THWN, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	2,560.45	543.64
26 05 19 16-0646	MLF	1/0 AWG,Type THHN-THWN, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	2,973.02	612.49
26 05 19 16-0647	MLF	2/0 AWG,Type THHN-THWN, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	3,393.83	676.02
26 05 19 16-0648	MLF	3/0 AWG,Type THHN-THWN, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	4,023.87	762.92
26 05 19 16-0649	MLF	4/0 AWG,Type THHN-THWN, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	4,456.18	841.71
26 05 19 16-0650	MLF	250 MCM,Type THHN-THWN, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	5,184.55	925.30
26 05 19 16-0651	MLF	300 MCM,Type THHN-THWN, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	6,481.59	1,006.26
26 05 19 16-0652	MLF	350 MCM,Type THHN-THWN, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	6,749.53	1,087.18
26 05 19 16-0653	MLF	400 MCM,Type THHN-THWN, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	7,736.61	1,209.24
26 05 19 16-0654	MLF	500 MCM,Type THHN-THWN, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	8,527.16	1,331.26
26 05 19 16-0655	MLF	600 MCM,Type THHN-THWN, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	10,464.10	1,550.77
26 05 19 16-0656	MLF	700 MCM,Type THHN-THWN, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	11,854.54	1,700.08
26 05 19 16-0657	MLF	750 MCM,Type THHN-THWN, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	12,089.54	1,763.10
26 05 19 16-0658	MLF	1,000 MCM,Type THHN-THWN, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	16,783.67	2,138.74
26 05 19 16-0659	MLF	#8 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	1,496.45	365.94
26 05 19 16-0660	MLF	#6 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	1,682.23	412.21
26 05 19 16-0661	MLF	#4 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	2,071.05	507.12
26 05 19 16-0662	MLF	#2 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	2,644.53	621.61
26 05 19 16-0663	MLF	#1 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	3,426.36	731.77
26 05 19 16-0664	MLF	1/0 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	3,978.26	824.72
26 05 19 16-0665	MLF	2/0 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	4,554.80	916.02
26 05 19 16-0666	MLF	3/0 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	5,311.77	999.39
26 05 19 16-0667	MLF	4/0 AWG, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	5,785.19	1,063.60
26 05 19 16-0668	MLF	250 MCM, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	6,661.49	1,138.00
26 05 19 16-0669	MLF	300 MCM, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	8,320.58	1,219.61
26 05 19 16-0670	MLF	350 MCM, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	8,652.36	1,317.51
26 05 19 16-0671	MLF	400 MCM, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	9,857.01	1,436.75
26 05 19 16-0672	MLF	500 MCM, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	11,032.54	1,648.83
26 05 19 16-0673	MLF	600 MCM, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	13,093.86	1,735.18
26 05 19 16-0674	MLF	700 MCM, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	14,681.12	1,829.37
26 05 19 16-0675	MLF	750 MCM, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	15,071.37	1,944.17
26 05 19 16-0676	MLF	1,000 MCM, Cross-linked High Heat-Resistant Water-Resistant (XHHW), 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	22,013.37	2,724.68

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 19 16-0677	MLF	#6 AWG, Underground Service Entrance (USE), Cross-Linked Polyethylene (XLPE) Insulation, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	1,429.11	412.21
26 05 19 16-0678	MLF	#4 AWG, Underground Service Entrance (USE), Cross-Linked Polyethylene (XLPE) Insulation, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	1,779.87	507.02
26 05 19 16-0679	MLF	#2 AWG, Underground Service Entrance (USE), Cross-Linked Polyethylene (XLPE) Insulation, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	2,216.64	622.43
26 05 19 16-0680	MLF	#1 AWG, Underground Service Entrance (USE), Cross-Linked Polyethylene (XLPE) Insulation, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	2,764.23	727.65
26 05 19 16-0681	MLF	1/0 AWG, Underground Service Entrance (USE), Cross-Linked Polyethylene (XLPE) Insulation, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	3,122.72	820.90
26 05 19 16-0682	MLF	2/0 AWG, Underground Service Entrance (USE), Cross-Linked Polyethylene (XLPE) Insulation, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	3,528.63	910.36
26 05 19 16-0683	MLF	3/0 AWG, Underground Service Entrance (USE), Cross-Linked Polyethylene (XLPE) Insulation, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	4,070.12	999.39
26 05 19 16-0684	MLF	4/0 AWG, Underground Service Entrance (USE), Cross-Linked Polyethylene (XLPE) Insulation, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	4,435.60	1,063.60
26 05 19 16-0685	MLF	250 MCM, Underground Service Entrance (USE), Cross-Linked Polyethylene (XLPE) Insulation, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	5,006.99	1,137.28
26 05 19 16-0686	MLF	300 MCM, Underground Service Entrance (USE), Cross-Linked Polyethylene (XLPE) Insulation, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	6,013.83	1,221.16
26 05 19 16-0687	MLF	350 MCM, Underground Service Entrance (USE), Cross-Linked Polyethylene (XLPE) Insulation, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	6,373.04	1,319.27
26 05 19 16-0688	MLF	400 MCM, Underground Service Entrance (USE), Cross-Linked Polyethylene (XLPE) Insulation, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	7,045.76	1,433.45
26 05 19 16-0689	MLF	500 MCM, Underground Service Entrance (USE), Cross-Linked Polyethylene (XLPE) Insulation, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	8,107.95	1,648.83
26 05 19 16-0690	MLF	600 MCM, Underground Service Entrance (USE), Cross-Linked Polyethylene (XLPE) Insulation, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	9,223.25	1,730.54
26 05 19 16-0691	MLF	700 MCM, Underground Service Entrance (USE), Cross-Linked Polyethylene (XLPE) Insulation, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	10,199.31	1,829.37
26 05 19 16-0692	MLF	750 MCM, Underground Service Entrance (USE), Cross-Linked Polyethylene (XLPE) Insulation, 600 Volt, Aluminum, Single Stranded Cable, Installed In Conduit	10,608.26	1,938.30

26 05 19 16-0693 Non-Metallic Sheathed Cable *(26 05 19 16-0309)*

26 05 19 16-0694 Indoor Installation *(26 05 19 16-0693)*

Note: For NM, NM-B, NMC-B and NMS-B.

26 05 19 16-0695	MLF	#14 AWG, 2 Conductors, 600 Volt, Type NM, Copper, Non-Metallic Sheathed Cable	3,430.54	783.09
		For Installation In Wood Stud Wall (Includes Drilling), Add	*293.65*	
26 05 19 16-0696	MLF	#14 AWG, 3 Conductors, 600 Volt, Type NM, Copper, Non-Metallic Sheathed Cable	4,389.56	948.07
		For Installation In Wood Stud Wall (Includes Drilling), Add	*355.54*	
26 05 19 16-0697	MLF	#14 AWG, 4 Conductors, 600 Volt, Type NM, Copper, Non-Metallic Sheathed Cable	7,331.96	1,049.07
		For Installation In Wood Stud Wall (Includes Drilling), Add	*393.40*	
26 05 19 16-0698	MLF	#12 AWG, 2 Conductors, 600 Volt, Type NM, Copper, Non-Metallic Sheathed Cable	4,654.98	890.36
		For Installation In Wood Stud Wall (Includes Drilling), Add	*316.88*	
26 05 19 16-0699	MLF	#12 AWG, 3 Conductors, 600 Volt, Type NM, Copper, Non-Metallic Sheathed Cable	7,277.40	989.08
		For Installation In Wood Stud Wall (Includes Drilling), Add	*370.92*	
26 05 19 16-0700	MLF	#12 AWG, 4 Conductors, 600 Volt, Type NM, Copper, Non-Metallic Sheathed Cable	10,192.41	1,104.71
		For Installation In Wood Stud Wall (Includes Drilling), Add	*414.27*	
26 05 19 16-0701	MLF	#10 AWG, 2 Conductors, 600 Volt, Type NM, Copper, Non-Metallic Sheathed Cable	5,981.86	989.60
		For Installation In Wood Stud Wall (Includes Drilling), Add	*371.11*	
26 05 19 16-0702	MLF	#10 AWG, 3 Conductors, 600 Volt, Type NM, Copper, Non-Metallic Sheathed Cable	10,539.84	1,154.39
		For Installation In Wood Stud Wall (Includes Drilling), Add	*432.89*	
26 05 19 16-0703	MLF	#10 AWG, 4 Conductors, 600 Volt, Type NM, Copper, Non-Metallic Sheathed Cable	12,711.15	1,319.06
		For Installation In Wood Stud Wall (Includes Drilling), Add	*494.65*	
26 05 19 16-0704	MLF	#8 AWG, 2 Conductors, 600 Volt, Type NM, Copper, Non-Metallic Sheathed Cable	13,132.95	1,185.09
		For Installation In Wood Stud Wall (Includes Drilling), Add	*422.00*	
26 05 19 16-0705	MLF	#8 AWG, 3 Conductors, 600 Volt, Type NM, Copper, Non-Metallic Sheathed Cable	16,970.42	1,432.42
		For Installation In Wood Stud Wall (Includes Drilling), Add	*510.11*	
26 05 19 16-0706	MLF	#6 AWG, 2 Conductors, 600 Volt, Type NM, Copper, Non-Metallic Sheathed Cable	17,718.60	1,349.97
		For Installation In Wood Stud Wall (Includes Drilling), Add	*479.19*	
26 05 19 16-0707	MLF	#6 AWG, 3 Conductors, 600 Volt, Type NM, Copper, Non-Metallic Sheathed Cable	24,069.30	1,628.21
		For Installation In Wood Stud Wall (Includes Drilling), Add	*579.66*	
26 05 19 16-0708	MLF	#4 AWG, 3 Conductors, 600 Volt, Type NM, Copper, Non-Metallic Sheathed Cable	60,446.26	1,793.09
		For Installation In Wood Stud Wall (Includes Drilling), Add	*637.63*	
26 05 19 16-0709	MLF	#2 AWG, 3 Conductors, 600 Volt, Type NM, Copper, Non-Metallic Sheathed Cable	70,848.62	1,947.67
		For Installation In Wood Stud Wall (Includes Drilling), Add	*695.59*	

26 05 19 16-0710 Direct Burial Cable *(26 05 19 16-0693)*

Note: Excludes trench and backfill. For NM, NM-B, NMC-B and NMS-B. Copper.

26 05 19 16-0711	MLF	#14 AWG, 2 Conductors, 600 Volt, Type UF Copper, Direct Burial Non-Metallic Sheathed Cable, Placed In Trench	2,405.04	
26 05 19 16-0712	MLF	#14 AWG, 3 Conductors, 600 Volt, Type UF Copper, Direct Burial Non-Metallic Sheathed Cable, Placed In Trench	3,165.87	
26 05 19 16-0713	MLF	#12 AWG, 2 Conductors, 600 Volt, Type UF Copper, Direct Burial Non-Metallic Sheathed Cable, Placed In Trench	3,070.45	
26 05 19 16-0714	MLF	#12 AWG, 3 Conductors, 600 Volt, Type UF Copper, Direct Burial Non-Metallic Sheathed Cable, Placed In Trench	4,036.76	
26 05 19 16-0715	MLF	#10 AWG, 2 Conductors, 600 Volt, Type UF Copper, Direct Burial Non-Metallic Sheathed Cable, Placed In Trench	3,389.45	
26 05 19 16-0716	MLF	#10 AWG, 3 Conductors, 600 Volt, Type UF Copper, Direct Burial Non-Metallic Sheathed Cable, Placed In Trench	4,992.31	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 19 16-0717	MLF	#8 AWG, 2 Conductors, 600 Volt, Type UF Copper, Direct Burial Non-Metallic Sheathed Cable, Placed In Trench		5,511.63	
26 05 19 16-0718	MLF	#8 AWG, 3 Conductors, 600 Volt, Type UF Copper, Direct Burial Non-Metallic Sheathed Cable, Placed In Trench		7,108.76	
26 05 19 16-0719	MLF	#6 AWG, 2 Conductors, 600 Volt, Type UF Copper, Direct Burial Non-Metallic Sheathed Cable, Placed In Trench		7,018.55	
26 05 19 16-0720	MLF	#6 AWG, 3 Conductors, 600 Volt, Type UF Copper, Direct Burial Non-Metallic Sheathed Cable, Placed In Trench		9,362.51	

26 05 19 16-0721 SEU Cable Copper, 3 Conductor *(26 05 19 16-0693)*

26 05 19 16-0722	MLF	12-12-12 Cable SEU Copper		3,200.38	992.98
26 05 19 16-0723	MLF	10-10-10 Cable SEU Copper		4,103.52	1,128.00
26 05 19 16-0724	MLF	8-8-8 Cable SEU Copper		5,209.49	1,263.14
26 05 19 16-0725	MLF	6-6-8 Cable SEU Copper		6,418.02	1,354.17
26 05 19 16-0726	MLF	6-6-6 Cable SEU Copper		6,946.35	1,399.52
26 05 19 16-0727	MLF	4-4-6 Cable SEU Copper		8,595.04	1,534.65
26 05 19 16-0728	MLF	4-4-4 Cable SEU Copper		9,316.18	1,579.89
26 05 19 16-0729	MLF	3-3-5 Cable SEU Copper		10,940.54	1,714.34
26 05 19 16-0730	MLF	3-3-3 Cable SEU Copper		11,632.75	1,804.81
26 05 19 16-0731	MLF	2-2-4 Cable SEU Copper		12,451.03	1,895.84
26 05 19 16-0732	MLF	2-2-2 Cable SEU Copper		13,342.62	1,985.96
26 05 19 16-0733	MLF	1-1-1 Cable SEU Copper		16,463.54	2,256.01
26 05 19 16-0734	MLF	1/0-1/0-1/0 Cable SEU Copper		19,710.18	2,529.22
26 05 19 16-0735	MLF	2/0-2/0-2/0 Cable SEU Copper		23,883.65	2,848.56
26 05 19 16-0736	MLF	3/0-3/0-3/0 Cable SEU Copper		28,930.22	3,168.57
26 05 19 16-0737	MLF	4/0-4/0-4/0 Cable SEU Copper		32,334.86	3,536.07

26 05 19 16-0738 SEU Cable Aluminum, 3 Conductor *(26 05 19 16-0693)*

26 05 19 16-0739	MLF	8-8-8 Cable SEU Aluminum		4,193.26	1,267.42
26 05 19 16-0740	MLF	6-6-6 Cable SEU Aluminum		4,798.94	1,392.63
26 05 19 16-0741	MLF	4-4-6 Cable SEU Aluminum		5,403.68	1,524.39
26 05 19 16-0742	MLF	4-4-4 Cable SEU Aluminum		5,660.95	1,588.80
26 05 19 16-0743	MLF	2-2-4 Cable SEU Aluminum		6,780.70	1,880.04
26 05 19 16-0744	MLF	2-2-2 Cable SEU Aluminum		7,203.95	1,978.97
26 05 19 16-0745	MLF	1-1-1 Cable SEU Aluminum		8,698.00	2,256.01
26 05 19 16-0746	MLF	1/0-1/0-2 Cable SEU Aluminum		9,212.21	2,374.79
26 05 19 16-0747	MLF	1/0-1/0-1/0 Cable SEU Aluminum		11,336.94	2,506.65
26 05 19 16-0748	MLF	2/0-2/0-1 Cable SEU Aluminum		10,399.48	2,685.78
26 05 19 16-0749	MLF	2/0-2/0-2/0 Cable SEU Aluminum		10,992.37	2,820.01
26 05 19 16-0750	MLF	3/0-3/0-1/0 Cable SEU Aluminum		12,018.64	2,952.89
26 05 19 16-0751	MLF	3/0-3/0-3/0 Cable SEU Aluminum		12,867.49	3,133.37
26 05 19 16-0752	MLF	4/0-4/0-2/0 Cable SEU Aluminum		13,555.72	3,387.40
26 05 19 16-0753	MLF	4/0-4/0-4/0 Cable SEU Aluminum		14,336.14	3,525.01

26 05 19 16-0754 SER Cable Copper, 4 Conductor *(26 05 19 16-0693)*

26 05 19 16-0755	MLF	6-6-6-6 Cable SER Copper		11,018.77	1,625.35
26 05 19 16-0756	MLF	4-4-4-6 Cable SER Copper		12,097.43	1,759.80
26 05 19 16-0757	MLF	3-3-3-5 Cable SER Copper		15,118.83	1,985.96
26 05 19 16-0758	MLF	2-2-2-4 Cable SER Copper		17,379.19	2,165.09
26 05 19 16-0759	MLF	1-1-1-3 Cable SER Copper		20,285.03	2,479.13
26 05 19 16-0760	MLF	1/0-1/0-1/0-2 Cable SER Copper		24,822.57	2,841.33
26 05 19 16-0761	MLF	2/0-2/0-2/0-1 Cable SER Copper		31,423.39	3,065.24
26 05 19 16-0762	MLF	3/0-3/0-3/0-1/0 Cable SER Copper		36,368.72	3,428.58

26 05 19 16-0763 SER Cable Aluminum, 4 Conductor *(26 05 19 16-0693)*

26 05 19 16-0764	MLF	8-8-8-8 Cable SER Aluminum		5,127.36	1,517.06
26 05 19 16-0765	MLF	6-6-6-6 Cable SER Aluminum		5,593.03	1,625.35
26 05 19 16-0766	MLF	4-4-4-6 Cable SER Aluminum		6,267.07	1,759.80
26 05 19 16-0767	MLF	2-2-2-4 Cable SER Aluminum		7,900.08	2,165.09
26 05 19 16-0768	MLF	1-1-1-3 Cable SER Aluminum		9,524.82	2,479.13
26 05 19 16-0769	MLF	1/0-1/0-1/0-2 Cable SER Aluminum		10,756.07	2,841.33
26 05 19 16-0770	MLF	2/0-2/0-2/0-1 Cable SER Aluminum		12,046.95	3,065.24
26 05 19 16-0771	MLF	3/0-3/0-3/0-1/0 Cable SER Aluminum		13,721.82	3,428.58
26 05 19 16-0772	MLF	4/0-4/0-4/0-2/0 Cable SER Aluminum		15,590.27	3,820.44

26 05 19 16-0773 Control Tray Cable, Low Voltage *(26 05 19 16-0011)*

Note: Type "TC" multi-conductor (individually numbered conductors) control cables installed in conduit.

26 05 19 16-0774	MLF	2 Conductor #18 AWG, Stranded, Type TC Control Cable		1,232.91	499.91
		For Work In Restricted Working Space, Add		*249.95*	
26 05 19 16-0775	MLF	3 Conductor #18 AWG, Stranded, Type TC Control Cable		1,445.95	559.20
		For Work In Restricted Working Space, Add		*279.60*	
26 05 19 16-0776	MLF	4 Conductor #18 AWG, Stranded, Type TC Control Cable		1,550.64	559.16
		For Work In Restricted Working Space, Add		*279.60*	
26 05 19 16-0777	MLF	5 Conductor #18 AWG, Stranded, Type TC Control Cable		1,939.84	701.35
		For Work In Restricted Working Space, Add		*350.67*	
26 05 19 16-0778	MLF	7 Conductor #18 AWG, Stranded, Type TC Control Cable		2,480.88	854.66
		For Work In Restricted Working Space, Add		*427.33*	
26 05 19 16-0779	MLF	9 Conductor #18 AWG, Stranded, Type TC Control Cable		2,879.81	939.83
		For Work In Restricted Working Space, Add		*469.91*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 19 16-0780	MLF	12 Conductor #18 AWG, Stranded, Type TC Control Cable	3,492.97	1,067.88
		For Work In Restricted Working Space, Add	*533.94*	
26 05 19 16-0781	MLF	15 Conductor #18 AWG, Stranded, Type TC Control Cable	4,478.68	1,305.25
		For Work In Restricted Working Space, Add	*652.63*	
26 05 19 16-0782	MLF	19 Conductor #18 AWG, Stranded, Type TC Control Cable	5,209.52	1,423.96
		For Work In Restricted Working Space, Add	*711.98*	
26 05 19 16-0783	MLF	25 Conductor #18 AWG, Stranded, Type TC Control Cable	6,463.90	1,468.48
		For Work In Restricted Working Space, Add	*734.24*	
26 05 19 16-0784	MLF	30 Conductor #18 AWG, Stranded, Type TC Control Cable	7,882.96	1,834.52
		For Work In Restricted Working Space, Add	*917.26*	
26 05 19 16-0785	MLF	37 Conductor #18 AWG, Stranded, Type TC Control Cable	9,531.33	2,143.99
		For Work In Restricted Working Space, Add	*1,071.99*	
26 05 19 16-0786	MLF	2 Conductor #16 AWG, Stranded, Type TC Control Cable	1,376.64	526.59
		For Work In Restricted Working Space, Add	*263.09*	
26 05 19 16-0787	MLF	3 Conductor #16 AWG, Stranded, Type TC Control Cable	1,623.49	588.63
		For Work In Restricted Working Space, Add	*294.32*	
26 05 19 16-0788	MLF	4 Conductor #16 AWG, Stranded, Type TC Control Cable	1,902.75	677.66
		For Work In Restricted Working Space, Add	*338.84*	
26 05 19 16-0789	MLF	5 Conductor #16 AWG, Stranded, Type TC Control Cable	2,194.09	738.26
		For Work In Restricted Working Space, Add	*369.13*	
26 05 19 16-0790	MLF	7 Conductor #16 AWG, Stranded, Type TC Control Cable	2,819.97	899.64
		For Work In Restricted Working Space, Add	*449.82*	
26 05 19 16-0791	MLF	9 Conductor #16 AWG, Stranded, Type TC Control Cable	3,290.62	989.29
		For Work In Restricted Working Space, Add	*494.65*	
26 05 19 16-0792	MLF	12 Conductor #16 AWG, Stranded, Type TC Control Cable	4,014.94	1,124.08
		For Work In Restricted Working Space, Add	*562.04*	
26 05 19 16-0793	MLF	15 Conductor #16 AWG, Stranded, Type TC Control Cable	5,168.88	1,373.89
		For Work In Restricted Working Space, Add	*686.94*	
26 05 19 16-0794	MLF	19 Conductor #16 AWG, Stranded, Type TC Control Cable	6,043.28	1,498.78
		For Work In Restricted Working Space, Add	*749.39*	
26 05 19 16-0795	MLF	25 Conductor #16 AWG, Stranded, Type TC Control Cable	7,596.82	1,545.77
		For Work In Restricted Working Space, Add	*772.89*	
26 05 19 16-0796	MLF	30 Conductor #16 AWG, Stranded, Type TC Control Cable	9,250.08	1,930.98
		For Work In Restricted Working Space, Add	*965.49*	
26 05 19 16-0797	MLF	37 Conductor #16 AWG, Stranded, Type TC Control Cable	11,208.90	2,256.83
		For Work In Restricted Working Space, Add	*1,128.41*	
26 05 19 16-0798	MLF	2 Conductor #14 AWG, Stranded, Type TC Control Cable	1,522.87	549.67
		For Work In Restricted Working Space, Add	*274.84*	
26 05 19 16-0799	MLF	3 Conductor #14 AWG, Stranded, Type TC Control Cable	1,875.21	618.31
		For Work In Restricted Working Space, Add	*309.16*	
26 05 19 16-0800	MLF	4 Conductor #14 AWG, Stranded, Type TC Control Cable	2,224.82	706.73
		For Work In Restricted Working Space, Add	*353.36*	
26 05 19 16-0801	MLF	5 Conductor #14 AWG, Stranded, Type TC Control Cable	2,553.45	761.14
		For Work In Restricted Working Space, Add	*380.57*	
26 05 19 16-0802	MLF	7 Conductor #14 AWG, Stranded, Type TC Control Cable	3,518.05	933.03
		For Work In Restricted Working Space, Add	*466.52*	
26 05 19 16-0803	MLF	9 Conductor #14 AWG, Stranded, Type TC Control Cable	4,121.06	1,030.52
		For Work In Restricted Working Space, Add	*515.36*	
26 05 19 16-0804	MLF	12 Conductor #14 AWG, Stranded, Type TC Control Cable	5,224.13	1,150.05
		For Work In Restricted Working Space, Add	*575.03*	
26 05 19 16-0805	MLF	15 Conductor #14 AWG, Stranded, Type TC Control Cable	6,239.61	1,373.67
		For Work In Restricted Working Space, Add	*686.94*	
26 05 19 16-0806	MLF	19 Conductor #14 AWG, Stranded, Type TC Control Cable	11,606.30	1,596.26
		For Work In Restricted Working Space, Add	*797.93*	
26 05 19 16-0807	MLF	25 Conductor #14 AWG, Stranded, Type TC Control Cable	9,630.68	1,866.26
		For Work In Restricted Working Space, Add	*933.34*	
26 05 19 16-0808	MLF	30 Conductor #14 AWG, Stranded, Type TC Control Cable	11,317.24	2,085.56
		For Work In Restricted Working Space, Add	*1,042.78*	
26 05 19 16-0809	MLF	37 Conductor #14 AWG, Stranded, Type TC Control Cable	13,744.07	2,437.37
		For Work In Restricted Working Space, Add	*1,218.69*	
26 05 19 16-0810	MLF	2 Conductor #12 AWG, Stranded, Type TC Control Cable	1,849.53	588.63
		For Work In Restricted Working Space, Add	*294.32*	
26 05 19 16-0811	MLF	3 Conductor #12 AWG, Stranded, Type TC Control Cable	2,286.74	651.29
		For Work In Restricted Working Space, Add	*325.54*	
26 05 19 16-0812	MLF	4 Conductor #12 AWG, Stranded, Type TC Control Cable	2,843.18	749.39
		For Work In Restricted Working Space, Add	*374.69*	
26 05 19 16-0813	MLF	5 Conductor #12 AWG, Stranded, Type TC Control Cable	3,292.36	797.62
		For Work In Restricted Working Space, Add	*398.81*	
26 05 19 16-0814	MLF	7 Conductor #12 AWG, Stranded, Type TC Control Cable	4,487.80	950.96
		For Work In Restricted Working Space, Add	*475.48*	
26 05 19 16-0815	MLF	9 Conductor #12 AWG, Stranded, Type TC Control Cable	5,609.14	1,124.08
		For Work In Restricted Working Space, Add	*562.04*	
26 05 19 16-0816	MLF	12 Conductor #12 AWG, Stranded, Type TC Control Cable	6,967.57	1,268.16
		For Work In Restricted Working Space, Add	*634.08*	
26 05 19 16-0817	MLF	15 Conductor #12 AWG, Stranded, Type TC Control Cable	8,373.30	1,454.88
		For Work In Restricted Working Space, Add	*727.44*	
26 05 19 16-0818	MLF	19 Conductor #12 AWG, Stranded, Type TC Control Cable	10,005.55	1,649.03
		For Work In Restricted Working Space, Add	*824.51*	
26 05 19 16-0819	MLF	25 Conductor #12 AWG, Stranded, Type TC Control Cable	13,086.62	1,927.27
		For Work In Restricted Working Space, Add	*963.63*	
26 05 19 16-0820	MLF	30 Conductor #12 AWG, Stranded, Type TC Control Cable	15,124.06	2,252.50
		For Work In Restricted Working Space, Add	*1,126.25*	
26 05 19 16-0821	MLF	37 Conductor #12 AWG, Stranded, Type TC Control Cable	18,426.51	2,632.76
		For Work In Restricted Working Space, Add	*1,316.38*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 19 16-0822	MLF	2 Conductor #10 AWG, Stranded, Type TC Control Cable	2,327.29	618.31
		For Work In Restricted Working Space, Add	*309.16*	
26 05 19 16-0823	MLF	3 Conductor #10 AWG, Stranded, Type TC Control Cable	3,044.87	678.08
		For Work In Restricted Working Space, Add	*338.84*	
26 05 19 16-0824	MLF	4 Conductor #10 AWG, Stranded, Type TC Control Cable	3,786.51	772.88
		For Work In Restricted Working Space, Add	*386.44*	
26 05 19 16-0825	MLF	5 Conductor #10 AWG, Stranded, Type TC Control Cable	4,490.60	838.43
		For Work In Restricted Working Space, Add	*419.21*	
26 05 19 16-0826	MLF	7 Conductor #10 AWG, Stranded, Type TC Control Cable	6,203.41	1,052.37
		For Work In Restricted Working Space, Add	*526.18*	
26 05 19 16-0827	MLF	9 Conductor #10 AWG, Stranded, Type TC Control Cable	7,459.54	1,177.88
		For Work In Restricted Working Space, Add	*588.94*	
26 05 19 16-0828	MLF	12 Conductor #10 AWG, Stranded, Type TC Control Cable	8,690.40	1,373.89
		For Work In Restricted Working Space, Add	*686.94*	
26 05 19 16-0829	MLF	15 Conductor #10 AWG, Stranded, Type TC Control Cable	10,351.59	1,571.12
		For Work In Restricted Working Space, Add	*785.56*	
26 05 19 16-0830	MLF	19 Conductor #10 AWG, Stranded, Type TC Control Cable	12,402.20	1,780.73
		For Work In Restricted Working Space, Add	*890.36*	
26 05 19 16-0831	MLF	25 Conductor #10 AWG, Stranded, Type TC Control Cable	16,305.57	2,081.23
		For Work In Restricted Working Space, Add	*1,040.61*	
26 05 19 16-0832	MLF	30 Conductor #10 AWG, Stranded, Type TC Control Cable	18,834.91	2,432.43
		For Work In Restricted Working Space, Add	*1,216.21*	
26 05 19 16-0833	MLF	37 Conductor #10 AWG, Stranded, Type TC Control Cable	22,989.48	2,843.60
		For Work In Restricted Working Space, Add	*1,421.80*	

26 05 19 16-0834 ACSR (Aluminum Conductor Steel Reinforced) *(26 05 19 16-0011)*

Note: Concentric lay stranded Class A galvanizing installed on poles, aerially.

26 05 19 16-0835 ACSR Cable *(26 05 19 16-0834)*

26 05 19 16-0836	MLF	#4 AWG, ACSR Cable Swan 6/1, Aluminum Cable, Installed On Poles (Aerial)	1,788.04	526.83
26 05 19 16-0837	MLF	#4 AWG, ACSR Cable Swanate 7/1, Aluminum Cable, Installed On Poles (Aerial)	1,919.83	547.03
26 05 19 16-0838	MLF	#2 AWG, ACSR Cable Sparrow 6/1, Aluminum Cable, Installed On Poles (Aerial)	2,110.71	568.10
26 05 19 16-0839	MLF	#2 AWG, ACSR Cable Sparate 7/1, Aluminum Cable, Installed On Poles (Aerial)	2,242.74	588.67
26 05 19 16-0840	MLF	1/0 AWG, ACSR Cable Raven 6/1, Aluminum Cable, Installed On Poles (Aerial)	2,573.74	608.63
26 05 19 16-0841	MLF	2/0 AWG, ACSR Cable Quail 6/1, Aluminum Cable, Installed On Poles (Aerial)	3,029.49	689.94
26 05 19 16-0842	MLF	3/0 AWG, ACSR Cable Pigeon 6/1, Aluminum Cable, Installed On Poles (Aerial)	3,549.68	769.42
26 05 19 16-0843	MLF	4/0 AWG, ACSR Cable Penguin 6/1, Aluminum Cable, Installed On Poles (Aerial)	4,138.53	850.01
26 05 19 16-0844	MLF	336 AWG ACSR Cable Merlin 18/1, Aluminum Cable, Installed On Poles (Aerial)	4,693.18	1,092.37
26 05 19 16-0845	MLF	477 AWG, ACSR Cable Hawk 26/1, Aluminum Cable, Installed On Poles (Aerial)	5,321.60	1,253.05

26 05 19 16-0846 All Aluminum Conductors *(26 05 19 16-0834)*

26 05 19 16-0847	MLF	795.0 ACSR Conductor Aluminum	35,554.61	10,397.89

26 05 19 16-0848 Single Conductor Installed On Poles *(26 05 19 16-0011)*

26 05 19 16-0849 Bare Stranded Conductor *(26 05 19 16-0848)*

26 05 19 16-0850	MLF	#12 AWG, Single Conductor, Bare Stranded Copper Cable, Installed On Poles	1,409.13	446.37
26 05 19 16-0851	MLF	#10 AWG, Single Conductor, Bare Stranded Copper Cable, Installed On Poles	1,685.57	486.54
26 05 19 16-0852	MLF	#8 AWG, Single Conductor, Bare Stranded Copper Cable, Installed On Poles	1,963.34	527.20
26 05 19 16-0853	MLF	#6 AWG, Single Conductor, Bare Stranded Copper Cable, Installed On Poles	2,479.02	568.10
26 05 19 16-0854	MLF	#4 AWG, Single Conductor, Bare Stranded Copper Cable, Installed On Poles	3,091.48	609.11
26 05 19 16-0855	MLF	#2 AWG, Single Conductor, Bare Stranded Copper Cable, Installed On Poles	4,562.07	730.60
26 05 19 16-0856	MLF	#1 AWG, Single Conductor, Bare Stranded Copper Cable, Installed On Poles	5,269.13	811.55
26 05 19 16-0857	MLF	1/0 AWG, Single Conductor, Bare Stranded Copper Cable, Installed On Poles	6,046.10	891.03
26 05 19 16-0858	MLF	2/0 AWG, Single Conductor, Bare Stranded Copper Cable, Installed On Poles	8,239.46	1,056.82
26 05 19 16-0859	MLF	3/0 AWG, Single Conductor, Bare Stranded Copper Cable, Installed On Poles	10,062.34	1,215.07
26 05 19 16-0860	MLF	4/0 AWG, Single Conductor, Bare Stranded Copper Cable, Installed On Poles	10,731.12	1,377.08
26 05 19 16-0861	MLF	250 MCM, Single Conductor, Bare Stranded Copper Cable, Installed On Poles	13,697.31	1,622.97
26 05 19 16-0862	MLF	300 MCM, Single Conductor, Bare Stranded Copper Cable, Installed On Poles	13,965.75	1,708.42
26 05 19 16-0863	MLF	350 MCM, Single Conductor, Bare Stranded Copper Cable, Installed On Poles	17,762.17	1,789.13
26 05 19 16-0864	MLF	400 MCM, Single Conductor, Bare Stranded Copper Cable, Installed On Poles	19,737.58	1,862.53
26 05 19 16-0865	MLF	500 MCM, Single Conductor, Bare Stranded Copper Cable, Installed On Poles	23,227.26	1,942.02

26 05 19 16-0866 Insulated Stranded Conductor *(26 05 19 16-0848)*

26 05 19 16-0867	MLF	#12 AWG, Single Conductor, Insulated Stranded Copper Cable, Installed On Poles	1,557.87	446.37
26 05 19 16-0868	MLF	#10 AWG, Single Conductor, Insulated Stranded Copper Cable, Installed On Poles	1,877.48	486.54
26 05 19 16-0869	MLF	#8 AWG, Single Conductor, Insulated Stranded Copper Cable, Installed On Poles	2,342.20	527.20
26 05 19 16-0870	MLF	#6 AWG, Single Conductor, Insulated Stranded Copper Cable, Installed On Poles	2,550.73	568.10
26 05 19 16-0871	MLF	#4 AWG, Single Conductor, Insulated Stranded Copper Cable, Installed On Poles	3,200.89	609.11
26 05 19 16-0872	MLF	#2 AWG, Single Conductor, Insulated Stranded Copper Cable, Installed On Poles	4,404.06	730.60
26 05 19 16-0873	MLF	#1 AWG, Single Conductor, Insulated Stranded Copper Cable, Installed On Poles	5,253.36	811.55
26 05 19 16-0874	MLF	1/0 AWG, Single Conductor, Insulated Stranded Copper Cable, Installed On Poles	6,266.11	891.03
26 05 19 16-0875	MLF	2/0 AWG, Single Conductor, Insulated Stranded Copper Cable, Installed On Poles	7,563.85	1,056.82
26 05 19 16-0876	MLF	3/0 AWG, Single Conductor, Insulated Stranded Copper Cable, Installed On Poles	9,120.61	1,215.07
26 05 19 16-0877	MLF	4/0 AWG, Single Conductor, Insulated Stranded Copper Cable, Installed On Poles	10,804.59	1,377.08
26 05 19 16-0878	MLF	250 MCM, Single Conductor, Insulated Stranded Copper Cable, Installed On Poles	13,247.81	1,622.97
26 05 19 16-0879	MLF	300 MCM, Single Conductor, Insulated Stranded Copper Cable, Installed On Poles	15,155.57	1,708.42
26 05 19 16-0880	MLF	350 MCM, Single Conductor, Insulated Stranded Copper Cable, Installed On Poles	16,700.81	1,789.13

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 19 16-0881	MLF	400 MCM, Single Conductor, Insulated Stranded Copper Cable, Installed On Poles	18,857.57	1,862.53
26 05 19 16-0882	MLF	500 MCM, Single Conductor, Insulated Stranded Copper Cable, Installed On Poles	21,355.50	1,942.02
26 05 19 16-0883		Bare Solid Conductor *(26 05 19 16-0848)*		
26 05 19 16-0884	MLF	#12 AWG, Single Conductor, Bare Solid Copper Cable, Installed On Poles	1,409.13	446.37
26 05 19 16-0885	MLF	#8 AWG, Single Conductor, Bare Solid Copper Cable, Installed On Poles	1,963.34	527.20
26 05 19 16-0886	MLF	#6 AWG, Single Conductor, Bare Solid Copper Cable, Installed On Poles	2,479.02	568.10
26 05 19 16-0887	MLF	#4 AWG, Single Conductor, Bare Solid Copper Cable, Installed On Poles	3,046.27	609.11
26 05 19 16-0888		Luminary Cable *(26 05 19 16)*		
26 05 19 16-0889	MLF	16-2 (1TPJ), 12-2 MC Tuff Luminary Cable™	4,141.54	890.36
26 05 19 16-0890	MLF	16-2 (1TPJ), 12-3 MC Tuff Luminary Cable™	4,689.91	989.29
26 05 19 16-0891	MLF	16-2 (1TPJ), 10-2 MC Tuff Luminary Cable™	5,154.46	989.29
26 05 19 16-0892	MLF	16-2 (1TPJ), 12-2 MC Lite Luminary Cable™	4,652.04	890.36
26 05 19 16-0893	MLF	16-2 (1TPJ), 12-3 MC Lite Luminary Cable™	5,165.38	989.29
26 05 19 16-0894	MLF	16-2 (1TPJ), 10-2 MC Lite Luminary Cable™	5,136.02	989.29
26 05 19 16-0895	MLF	16-2 (1TPJ), 12-2 MC Lite Luminary Stranded Cable™	4,355.59	890.36
26 05 19 16-0896	MLF	16-2 (1TPJ), 12-3 MC Lite Luminary Stranded Cable™	5,157.34	989.29

26 05 23 Control-Voltage Electrical Power Cables *(26 05)*

26 05 23 00-0001 Cable For HVAC System Controls *(26 05 23)*

26 05 23 00-0002 Low Voltage Thermostat Cable To 300 Volt *(26 05 23 00-0001)*

Note: For surface or conduit installation.

26 05 23 00-0003	MLF	#20/2 Conductor, Low Volt Thermostat Cable	432.79	131.39
26 05 23 00-0004	MLF	#20/3 Conductor, Low Volt Thermostat Cable	490.72	138.40
26 05 23 00-0005	MLF	#20/4 Conductor, Low Volt Thermostat Cable	530.77	146.33
26 05 23 00-0006	MLF	#20/5 Conductor, Low Volt Thermostat Cable	628.98	152.52
26 05 23 00-0007	MLF	#20/6 Conductor, Low Volt Thermostat Cable	658.69	159.73
26 05 23 00-0008	MLF	#20/7 Conductor, Low Volt Thermostat Cable	722.68	166.37
26 05 23 00-0009	MLF	#20/8 Conductor, Low Volt Thermostat Cable	778.58	173.02
26 05 23 00-0010	MLF	#20/9 Conductor, Low Volt Thermostat Cable	843.00	179.93
26 05 23 00-0011	MLF	#20/10 Conductor, Low Volt Thermostat Cable	904.53	185.33
26 05 23 00-0012	MLF	#18/2 Conductor, Low Volt Thermostat Cable	466.71	131.39
26 05 23 00-0013	MLF	#18/3 Conductor, Low Volt Thermostat Cable	551.25	138.40
26 05 23 00-0014	MLF	#18/4 Conductor, Low Volt Thermostat Cable	626.79	146.33
26 05 23 00-0015	MLF	#18/5 Conductor, Low Volt Thermostat Cable	668.62	152.52
26 05 23 00-0016	MLF	#18/6 Conductor, Low Volt Thermostat Cable	738.31	159.73
26 05 23 00-0017	MLF	#18/7 Conductor, Low Volt Thermostat Cable	759.24	166.37
26 05 23 00-0018	MLF	#18/8 Conductor, Low Volt Thermostat Cable	834.37	173.02
26 05 23 00-0019	MLF	#18/9 Conductor, Low Volt Thermostat Cable	976.87	179.93
26 05 23 00-0020	MLF	#18/10 Conductor, Low Volt Thermostat Cable	1,069.65	185.33

26 05 26 Grounding and Bonding for Electrical Systems *(26 05)*

26 05 26 00-0001 Conductors, Straps And Conduit Jumpers *(26 05 26)*

26 05 26 00-0002 Single Conductor *(26 05 26 00-0001)*

26 05 26 00-0003 Copper Bare Stranded Conductors *(26 05 26 00-0002)*

26 05 26 00-0004	MLF	12 AWG Copper Bare Single Stranded Conductor	678.07	220.78
26 05 26 00-0005	MLF	10 AWG Copper Bare Single Stranded Conductor	934.16	220.78
26 05 26 00-0006	MLF	8 AWG Copper Bare Single Stranded Conductor	1,191.13	265.96
26 05 26 00-0007	MLF	6 AWG Copper Bare Single Stranded Conductor	1,714.41	265.96
26 05 26 00-0008	MLF	4 AWG Copper Bare Single Stranded Conductor	2,368.33	321.14
26 05 26 00-0009	MLF	2 AWG Copper Bare Single Stranded Conductor	3,843.41	321.14
26 05 26 00-0010	MLF	1 AWG Copper Bare Single Stranded Conductor	4,479.21	386.38
26 05 26 00-0011	MLF	1/0 AWG Copper Bare Single Stranded Conductor	5,264.78	386.38
26 05 26 00-0012	MLF	2/0 AWG Copper Bare Single Stranded Conductor	7,485.41	486.74
26 05 26 00-0013	MLF	3/0 AWG Copper Bare Single Stranded Conductor	9,282.11	486.74
26 05 26 00-0014	MLF	4/0 AWG Copper Bare Single Stranded Conductor	9,778.23	647.32
26 05 26 00-0015	MLF	250 MCM Copper Bare Single Stranded Conductor	12,674.54	647.32
26 05 26 00-0016	MLF	300 MCM Copper Bare Single Stranded Conductor	12,668.67	747.68
26 05 26 00-0017	MLF	350 MCM Copper Bare Single Stranded Conductor	17,260.56	747.68
26 05 26 00-0018	MLF	500 MCM Copper Bare Single Stranded Conductor	23,682.95	923.30
26 05 26 00-0019		Copper Insulated Single Stranded Conductors *(26 05 26 00-0002)*		
26 05 26 00-0020	MLF	12 AWG Copper Insulated Single Stranded Conductor	1,403.72	301.08
26 05 26 00-0021	MLF	10 AWG Copper Insulated Single Stranded Conductor	1,457.10	301.08
26 05 26 00-0022	MLF	8 AWG Copper Insulated Single Stranded Conductor	1,904.19	301.08
26 05 26 00-0023	MLF	6 AWG Copper Insulated Single Stranded Conductor	2,125.02	521.86
26 05 26 00-0024	MLF	4 AWG Copper Insulated Single Stranded Conductor	2,944.44	521.86
26 05 26 00-0025	MLF	2 AWG Copper Insulated Single Stranded Conductor	4,251.91	521.86
26 05 26 00-0026	MLF	1 AWG Copper Insulated Single Stranded Conductor	5,188.95	913.26
26 05 26 00-0027	MLF	1/0 AWG Copper Insulated Single Stranded Conductor	6,380.41	913.26

copyright 2026 The Gordian Group, Inc.

	MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 26 00-0028		MLF	2/0 AWG Copper Insulated Single Stranded Conductor	7,555.21	913.26
26 05 26 00-0029		MLF	3/0 AWG Copper Insulated Single Stranded Conductor	9,092.86	913.26
26 05 26 00-0030		MLF	4/0 AWG Copper Insulated Single Stranded Conductor	10,805.09	1,194.27
26 05 26 00-0031		MLF	250 MCM Copper Insulated Single Stranded Conductor	13,186.17	1,194.27
26 05 26 00-0032		MLF	300 MCM Copper Insulated Single Stranded Conductor	15,444.77	1,194.27
26 05 26 00-0033		MLF	350 MCM Copper Insulated Single Stranded Conductor	17,885.05	1,856.64
26 05 26 00-0034		MLF	500 MCM Copper Insulated Single Stranded Conductor	23,596.32	1,856.64
26 05 26 00-0035			**Copper Bare Single Solid Conductors** *(26 05 26 00-0002)*		
26 05 26 00-0036		MLF	12 AWG Copper Bare Single Solid Conductor	678.07	220.78
26 05 26 00-0037		MLF	10 AWG Copper Bare Single Solid Conductor	934.16	220.78
26 05 26 00-0038		MLF	8 AWG Copper Bare Single Solid Conductor	1,191.13	265.96
26 05 26 00-0039		MLF	6 AWG Copper Bare Single Solid Conductor	1,714.41	265.96
26 05 26 00-0040		MLF	4 AWG Copper Bare Single Solid Conductor	2,368.33	321.14
26 05 26 00-0041		MLF	2 AWG Copper Bare Single Solid Conductor	3,843.41	321.14
26 05 26 00-0042		MLF	1/0 AWG Copper Bare Single Solid Conductor	5,264.78	386.38
26 05 26 00-0043		MLF	2/0 AWG Copper Bare Single Solid Conductor	6,733.73	486.74
26 05 26 00-0044		MLF	3/0 AWG Copper Bare Single Solid Conductor	8,202.41	486.74
26 05 26 00-0045		MLF	4/0 AWG Copper Bare Single Solid Conductor	9,778.23	511.83
26 05 26 00-0046			**Aluminum Bare Single Stranded Conductors** *(26 05 26 00-0002)*		
26 05 26 00-0047		MLF	8 AWG Aluminum Bare Single Stranded Conductor	830.33	265.96
26 05 26 00-0048		MLF	6 AWG Aluminum Bare Single Stranded Conductor	932.94	265.96
26 05 26 00-0049		MLF	4 AWG Aluminum Bare Single Stranded Conductor	1,093.43	321.14
26 05 26 00-0050		MLF	2 AWG Aluminum Bare Single Stranded Conductor	1,428.48	321.14
26 05 26 00-0051		MLF	1 AWG Aluminum Bare Single Stranded Conductor	1,713.21	386.38
26 05 26 00-0052		MLF	1/0 AWG Aluminum Bare Single Stranded Conductor	1,963.38	386.38
26 05 26 00-0053		MLF	2/0 AWG Aluminum Bare Single Stranded Conductor	2,259.09	486.74
26 05 26 00-0054		MLF	3/0 AWG Aluminum Bare Single Stranded Conductor	2,637.57	486.74
26 05 26 00-0055		MLF	4/0 AWG Aluminum Bare Single Stranded Conductor	3,124.17	647.32
26 05 26 00-0056		MLF	250 MCM Aluminum Bare Single Stranded Conductor	3,551.07	647.32
26 05 26 00-0057		MLF	300 MCM Aluminum Bare Single Stranded Conductor	4,373.94	747.68
26 05 26 00-0058		MLF	350 MCM Aluminum Bare Single Stranded Conductor	5,062.68	747.68
26 05 26 00-0059		MLF	500 MCM Aluminum Bare Single Stranded Conductor	5,923.67	923.30
26 05 26 00-0060			**Aluminum Bare Single Solid Conductors** *(26 05 26 00-0002)*		
26 05 26 00-0061		MLF	8 AWG Aluminum Bare Single Solid Conductor	830.33	265.96
26 05 26 00-0062		MLF	6 AWG Aluminum Bare Single Solid Conductor	932.94	265.96
26 05 26 00-0063		MLF	4 AWG Aluminum Bare Single Solid Conductor	1,093.43	321.14
26 05 26 00-0064		MLF	2 AWG Aluminum Bare Single Solid Conductor	1,428.48	321.14
26 05 26 00-0065		MLF	1 AWG Aluminum Bare Single Solid Conductor	1,672.71	511.83
26 05 26 00-0066		MLF	1/0 AWG Aluminum Bare Single Solid Conductor	1,963.38	511.83
26 05 26 00-0067		MLF	2/0 AWG Aluminum Bare Single Solid Conductor	2,158.76	486.74
26 05 26 00-0068		MLF	3/0 AWG Aluminum Bare Single Solid Conductor	2,435.55	486.74
26 05 26 00-0069		MLF	4/0 AWG Aluminum Bare Single Solid Conductor	3,124.17	647.32
26 05 26 00-0070		MLF	250 MCM Aluminum Bare Single Solid Conductor	3,551.07	647.32
26 05 26 00-0071		MLF	300 MCM Aluminum Bare Single Solid Conductor	4,373.94	747.68
26 05 26 00-0072		MLF	350 MCM Aluminum Bare Single Solid Conductor	5,062.68	747.68
26 05 26 00-0073		MLF	500 MCM Aluminum Bare Single Solid Conductor	5,923.67	923.30
26 05 26 00-0074			**Aluminum Smooth Woven Conductors** *(26 05 26 00-0002)*		
26 05 26 00-0075		LF	10 Strand x 14 AWG Smooth Weave Aluminum Conductor	2.82	0.78
26 05 26 00-0076		LF	16 Strand x 14 AWG Smooth Weave Aluminum Conductor	3.11	0.86
26 05 26 00-0077		LF	24 Strand x 14 AWG Smooth Weave Aluminum Conductor	3.71	0.98
26 05 26 00-0078		LF	26 Strand x 14 AWG Smooth Weave Aluminum Conductor	3.73	1.00
26 05 26 00-0079		LF	28 Strand x 14 AWG Smooth Weave Aluminum Conductor	3.92	1.05
26 05 26 00-0080			**Copper Flexible Braid Connector Jumper Strap** *(26 05 26 00-0001)* Note: Manufactured from flat extra flexible tinned braid. Ferrules are tin plated pure electrolytic copper with 2 holes, on each end.		
26 05 26 00-0081		EA	100 Amperes, Copper Flexible Braid Jumper Strap, 12" Length	159.21	28.20
			For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.92*	
26 05 26 00-0082		EA	225 Amperes, Copper Flexible Braid Jumper Strap, 12" Length	286.15	33.84
			For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.30*	
26 05 26 00-0083		EA	225 Amperes, Copper Flexible Braid Jumper Strap, 18" Length	373.62	33.84
			For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.30*	
26 05 26 00-0084		EA	225 Amperes, Copper Flexible Braid Jumper Strap, 24" Length	459.89	33.84
			For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.30*	
26 05 26 00-0085		EA	400 Amperes, Copper Flexible Braid Jumper Strap, 12" Length	387.75	36.66
			For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*25.38*	
26 05 26 00-0086		EA	400 Amperes, Copper Flexible Braid Jumper Strap, 18" Length	513.59	36.66
			For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*25.38*	
26 05 26 00-0087		EA	400 Amperes, Copper Flexible Braid Jumper Strap, 24" Length	622.92	36.66
			For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*25.38*	
26 05 26 00-0088		EA	600 Amperes, Copper Flexible Braid Jumper Strap, 12" Length	511.31	46.53
			For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.92*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 26 00-0089	EA	800 Amperes, Copper Flexible Braid Jumper Strap, 12" Length	614.55	56.40
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*33.84*	
26 05 26 00-0090		**Bonding Jumper For Metallic Conduit** *(26 05 26 00-0001)*		
26 05 26 00-0091	EA	1/2" To 1" Conductor, Bonding Jumper, Metallic Conduit	195.96	62.04
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*35.25*	
26 05 26 00-0092	EA	1-1/4" To 2" Conductor, Bonding Jumper, Metallic Conduit	241.47	62.04
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*43.38*	
26 05 26 00-0093	EA	2-1/2" To 4" Conductor, Bonding Jumper, Metallic Conduit	369.84	95.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*51.27*	
26 05 26 00-0094	EA	5" To 6" Conductor, Bonding Jumper, Metallic Conduit	563.86	95.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*62.67*	
26 05 26 00-0095		**Ground Rods** *(26 05 26)*		
26 05 26 00-0096		**Copper-Clad Ground Rods** *(26 05 26 00-0095)*		
26 05 26 00-0097	EA	1/2" Diameter x 8' Long Copper-Clad Ground Rods	96.92	84.60
26 05 26 00-0098	EA	5/8" Diameter x 8' Long Copper-Clad Ground Rods	101.14	84.60
26 05 26 00-0099	EA	3/4" Diameter x 8' Long Copper-Clad Ground Rods	118.15	84.60
26 05 26 00-0100	EA	1/2" Diameter x 10' Long Copper-Clad Ground Rods	114.11	84.60
26 05 26 00-0101	EA	5/8" Diameter x 10' Long Copper-Clad Ground Rods	119.38	84.60
26 05 26 00-0102	EA	3/4" Diameter x 10' Long Copper-Clad Ground Rods	140.65	84.60
26 05 26 00-0103		**Copper Grounding Shaft** *(26 05 26 00-0095)*		
26 05 26 00-0104	EA	2-1/8" Diameter x 10' Long Copper Grounding Shaft	326.87	84.60
26 05 26 00-0105	EA	2-1/8" Diameter "L" Shaped; 3' Riser x 10' Horizontal Copper Grounding Shaft	406.89	84.60
26 05 26 00-0106	EA	2-1/8" Diameter "L" Shaped; 3' Riser x 20' Horizontal Copper Grounding Shaft	632.23	84.60
26 05 26 00-0107		**Ground Access Wells** *(26 05 26 00-0095)*		
26 05 26 00-0108		**Precast Ground Access Wells** *(26 05 26 00-0107)*		
26 05 26 00-0109	EA	8" Diameter x 24" Deep Precast Ground Access Well Note: With cast iron grate.	307.10	
26 05 26 00-0110	EA	10" Diameter x 24" Deep Precast Ground Access Well Note: With cast iron grate.	318.58	
26 05 26 00-0111	EA	12" Diameter x 24" Deep Precast Ground Access Well Note: With cast iron grate.	919.70	
26 05 26 00-0112	EA	18" Diameter x 24" Deep Precast Ground Access Well Note: With cast iron grate.	931.18	
26 05 26 00-0113		**Polyvinyl Chloride (PVC) Ground Access Well** *(26 05 26 00-0107)*		
26 05 26 00-0114	EA	10" Diameter x 24" Deep Polyvinyl Chloride (PVC) Belled Hub Ground Access Well Note: Schedule 40 with cast iron grated cover.	599.60	
26 05 26 00-0115	EA	12" Diameter x 24" Deep Polyvinyl Chloride (PVC) Belled Hub Ground Access Well Note: Schedule 40 with cast iron grated cover.	729.85	
26 05 26 00-0116	EA	18" Diameter x 24" Deep Polyvinyl Chloride (PVC) Belled Hub Ground Access Well Note: Schedule 40 with cast iron grated cover.	1,602.58	
26 05 26 00-0117	EA	10" Diameter x 24" Deep Polyvinyl Chloride (PVC) Belled Hub Ground Access Well Note: Schedule 40 with flat steel cover.	455.23	
26 05 26 00-0118	EA	12" Diameter x 24" Deep Polyvinyl Chloride (PVC) Belled Hub Ground Access Well Note: Schedule 40 with flat steel cover.	550.30	
26 05 26 00-0119	EA	18" Diameter x 24" Deep Polyvinyl Chloride (PVC) Belled Hub Ground Access Well Note: Schedule 40 with flat steel cover.	1,433.94	
26 05 26 00-0120	EA	8" Diameter x 24" Deep Polyvinyl Chloride (PVC) Ground Access Well Note: Schedule 40 with flat steel cover.	262.65	
26 05 26 00-0121	EA	10" Diameter x 24" Deep Polyvinyl Chloride (PVC) Ground Access Well Note: Schedule 40 with flat steel cover.	360.60	
26 05 26 00-0122	EA	12" Diameter x 24" Deep Polyvinyl Chloride (PVC) Ground Access Well Note: Schedule 40 with flat steel cover.	428.98	
26 05 26 00-0123	EA	8" Diameter x 24" Deep Schedule 40 Polyvinyl Chloride (PVC) Ground Access Well, Plastic Cover	214.13	
26 05 26 00-0124	EA	10" Diameter x 24" Deep Schedule 40 Polyvinyl Chloride (PVC) Ground Access Well, Plastic Cover	332.69	
26 05 26 00-0125	EA	8" Diameter x 42" Deep Polyvinyl Chloride (PVC) Slotted Ground Access Well Note: Schedule 40 with flat steel cover.	497.04	
26 05 26 00-0126	EA	10" Diameter x 42" Deep Polyvinyl Chloride (PVC) Slotted Ground Access Well Note: Schedule 40 with flat steel cover.	684.75	
26 05 26 00-0127	EA	8" Diameter x 42" Deep Polyvinyl Chloride (PVC) Slotted Ground Access Well Note: Schedule 40 with plastic cover.	476.41	
26 05 26 00-0128	EA	10" Diameter x 42" Deep Polyvinyl Chloride (PVC) Slotted Ground Access Well Note: Schedule 40 with plastic cover.	512.48	
26 05 26 00-0129	EA	10" Diameter x 36" Deep Polyvinyl Chloride (PVC) Schedule 80 Ground Access Well Note: With cast iron cover, heavy-duty.	915.02	
26 05 26 00-0130	EA	10" Diameter x 42" Deep Polyvinyl Chloride (PVC) Schedule 80 Ground Access Well Note: With cast iron cover, heavy-duty.	1,155.47	
26 05 26 00-0131	EA	12" Diameter x 12" Deep Polyvinyl Chloride (PVC) Schedule 80 Ground Access Well Note: With cast iron cover, heavy-duty.	509.82	
26 05 26 00-0132	EA	12" Diameter x 24" Deep Polyvinyl Chloride (PVC) Schedule 80 Ground Access Well Note: With cast iron cover, heavy-duty.	694.67	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 26 00-0133	EA	12" Diameter x 30" Deep Polyvinyl Chloride (PVC) Schedule 80 Ground Access Well Note: With cast iron cover, heavy-duty.	686.62	
26 05 26 00-0134		**Polymer Concrete Ground Access Well** *(26 05 26 00-0107)*		
26 05 26 00-0135	EA	12" x 12" x 12" Polymer Concrete Ground Access Well	580.54	
26 05 26 00-0136	EA	12" x 12" x 12" Heavy-Duty Polymer Concrete Ground Access Well	636.75	
26 05 26 00-0137	EA	12" x 12" x 18" Polymer Concrete Ground Access Well	639.63	
26 05 26 00-0138	EA	12" x 12" x 18" Heavy-Duty Polymer Concrete Ground Access Well	701.46	
26 05 26 00-0139	EA	12" x 12" x 24" Polymer Concrete Ground Access Well	700.96	
26 05 26 00-0140	EA	12" x 12" x 24" Heavy-Duty Polymer Concrete Ground Access Well	768.97	
26 05 26 00-0141	EA	13" x 24" x 18" Polymer Concrete Ground Access Well	934.79	
26 05 26 00-0142	EA	13" x 24" x 18" Heavy-Duty Polymer Concrete Ground Access Well	1,027.49	
26 05 26 00-0143		**High-Density Polyethylene (HDPE) Ground Access Well** *(26 05 26 00-0107)*		
26 05 26 00-0144	EA	9" Diameter x 10" Deep High-Density Polyethylene (HDPE) Ground Access Well Note: With cover.	212.25	
26 05 26 00-0145	EA	14" Diameter x 18" Deep High-Density Polyethylene (HDPE) Ground Access Well Note: With cover.	295.66	
26 05 26 00-0146		**Clay Tile Ground Access Wells** *(26 05 26 00-0107)*		
26 05 26 00-0147	EA	8" Diameter x 24" Deep Clay Tile Ground Access Well With Concrete Cover	335.29	
26 05 26 00-0148	EA	8" Diameter x 24" Deep Clay Tile Ground Access Well With Cast Iron Grated Cover	352.47	
26 05 26 00-0149	EA	Concrete Cover For 8" Diameter x 24" Deep Clay Tile Ground Access Well	106.67	
26 05 26 00-0150		**Ground Rod Clamps And Fittings** *(26 05 26)*		
26 05 26 00-0151		**Bronze Ground Rod Clamp** *(26 05 26 00-0150)*		
26 05 26 00-0152	EA	1/2" Bronze Ground Rod Clamp	22.89	12.75
26 05 26 00-0153	EA	5/8" Bronze Ground Rod Clamp	23.95	12.75
26 05 26 00-0154	EA	3/4" Bronze Ground Rod Clamp	25.46	12.75
26 05 26 00-0155		**Bronze Pipe Clamps** *(26 05 26 00-0150)*		
26 05 26 00-0156	EA	1/2" To 1" Diameter, Bronze Pipe Ground Clamps	29.37	21.21
26 05 26 00-0157	EA	1-1/4" To 2" Diameter, Bronze Ground Clamps For Pipe	36.43	25.38
26 05 26 00-0158	EA	2-1/2" To 3" Diameter, Bronze Ground Clamps For Pipe	49.22	29.67
26 05 26 00-0159	EA	2-1/2" To 4" Diameter, Bronze Ground Clamps For Pipe	61.34	38.13
26 05 26 00-0160	EA	4" To 6" Diameter, Bronze Ground Clamps For Pipe	91.88	55.05
26 05 26 00-0161		**Grounding Fittings** *(26 05 26 00-0150)*		
26 05 26 00-0162		**Embedded Fittings** *(26 05 26 00-0161)*		
26 05 26 00-0163	EA	Ground Insert With Two 3/8 x 16 Holes #2 To 250 MCM Cable Range, Embedded	154.14	
26 05 26 00-0164	EA	Ground Insert With Four 3/8 x 16 Holes #2 To 250 MCM Cable Range, Embedded	163.77	
26 05 26 00-0165	EA	Ground Insert With Four 3/8 x 16 Holes 250 To 500 MCM Cable Range, Embedded	180.86	
26 05 26 00-0166	EA	#8 To 1 AWG, Copper To Aluminum, Grounding Wire Splice	149.38	
26 05 26 00-0167	EA	1/0 To 3/0 AWG, Copper To Aluminum, Grounding Wire Splice	178.96	
26 05 26 00-0168	EA	4/0 To 300 MCM, Copper To Aluminum, Grounding Wire Splice	209.96	
26 05 26 00-0169	EA	350 To 500 MCM, Copper To Aluminum, Grounding Wire Splice	236.70	
26 05 26 00-0170		**Ground Rod Receptacle** *(26 05 26 00-0161)*		
26 05 26 00-0171	EA	1/2" Ground Rod Receptacle	332.78	117.31
26 05 26 00-0172	EA	5/8" Ground Rod Receptacle	347.90	120.62
26 05 26 00-0173	EA	3/4" Ground Rod Receptacle	363.35	123.90
26 05 26 00-0174		**Ground Kits For Circuit Breaker Panels** *(26 05 26 00-0161)*		
26 05 26 00-0175	EA	14-8 AWG Copper Ground Kit	74.54	28.20
26 05 26 00-0176	EA	12-8 AWG Aluminum Ground Kit	65.24	28.20
26 05 26 00-0177	EA	14-4 AWG Copper Ground Kit	82.64	28.20
26 05 26 00-0178	EA	12-4 AWG Aluminum Ground Kit	71.43	28.20
26 05 26 00-0179		**Insulated Grounding Bars** *(26 05 26 00-0150)*		
26 05 26 00-0180	EA	1/2" x 4" x 10" Insulated Ground Bar	311.66	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*50.76*	
26 05 26 00-0181	EA	Insulated Ground Bar SK 9560 1/2" x 4" x 20"	327.30	28.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*50.76*	
26 05 26 00-0182		**Ground Conductor Bonding** *(26 05 26)*		
26 05 26 00-0183		**Ground Conductor Bonding** *(26 05 26 00-0182)*		
26 05 26 00-0184		**Splice, Lug, Ground Rod, Rebar Or Structural Steel Cadweld** *(26 05 26 00-0183)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 26 00-0185	EA	Up To #6 AWG Cadweld Connection For Splice, Lug, Ground Rod, Rebar Or Structural Steel Note: Includes molds, materials and all necessary tools to make connections.	133.79	
26 05 26 00-0186	EA	#4 To #1 AWG Cadweld Connection For Splice, Lug, Ground Rod, Rebar Or Structural Steel Note: Includes molds, materials and all necessary tools to make connections.	145.08	
26 05 26 00-0187	EA	1/0 To 4/0 AWG Cadweld Connection For Splice, Lug, Ground Rod, Rebar Or Structural Steel Note: Includes molds, materials and all necessary tools to make connections.	156.35	
26 05 26 00-0188	EA	250 To 1,000 MCM AWG Cadweld Connection For Splice, Lug, Ground Rod, Rebar Or Structural Steel Note: Includes molds, materials and all necessary tools to make connections.	224.03	
26 05 26 00-0189		**Tee, Wye Or Cross Cadweld** *(26 05 26 00-0183)*		
26 05 26 00-0190	EA	Up To #6 AWG Cadweld Connection For Tee, Wye Or Cross Note: Includes molds, materials and all necessary tools to make connections.	150.71	
26 05 26 00-0191	EA	#4 To #1 AWG Cadweld Connection For Tee, Wye Or Cross Note: Includes molds, materials and all necessary tools to make connections.	173.26	
26 05 26 00-0192	EA	1/0 To 4/0 AWG Cadweld Connection For Tee, Wye Or Cross Note: Includes molds, materials and all necessary tools to make connections.	212.75	
26 05 26 00-0193	EA	250 To 1,000 MCM AWG Cadweld Connection For Tee, Wye Or Cross Note: Includes molds, materials and all necessary tools to make connections.	257.86	
26 05 26 00-0194		**Grounding Equipment** *(26 05 26)*		
26 05 26 00-0195		**Special Grounding Equipment** *(26 05 26 00-0194)*		
26 05 26 00-0196		**Ground Reels And Ground Bus** *(26 05 26 00-0195)*		
26 05 26 00-0197	EA	Ground Reel With 50' Of Galvanized Steel Cable	727.53	
26 05 26 00-0198		**Copper Bars** *(26 05 26 00-0195)*		
26 05 26 00-0199	LF	1/4" x 2" Copper Bar	42.06	
26 05 26 00-0200		**Phenolic Insulators** *(26 05 26 00-0195)*		
26 05 26 00-0201	EA	2" x 2" x 1" Long Phenolic Insulators	29.82	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.77*	
26 05 26 00-0202		**Grounding Studs** *(26 05 26 00-0195)*		
26 05 26 00-0203	EA	Ball Grounding Stud	43.16	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.10*	
26 05 26 00-0204		**Equipment Ground Bar Kits** *(26 05 26 00-0195)*		
26 05 26 00-0205	EA	Switch Rating 30 Ground Bar Kit	33.45	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.77*	
26 05 26 00-0206	EA	Switch Rating 60 Ground Bar Kit	42.74	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.45*	
26 05 26 00-0207	EA	Switch Rating 100 Ground Bar Kit	49.80	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.46*	
26 05 26 00-0208	EA	Switch Rating 200 Ground Bar Kit	86.43	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.15*	
26 05 26 00-0209		**Panelboard Ground Bar Kits** *(26 05 26 00-0195)*		
26 05 26 00-0210	EA	Panelboard Ground Bar Kit	125.34	8.46
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.46*	
26 05 26 00-0211		**Circuit Breaker Ground Bar Kits** *(26 05 26 00-0195)*		
26 05 26 00-0212	EA	3 Circuit, Ground Bar Kit	27.81	5.07
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.08*	
26 05 26 00-0213	EA	4 Circuit, Ground Bar Kit	27.30	5.07
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.08*	
26 05 26 00-0214	EA	7 Circuit, Ground Bar Kit	28.14	5.07
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.08*	
26 05 26 00-0215	EA	12 Circuit, Ground Bar Kit	31.91	5.75
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.75*	
26 05 26 00-0216	EA	20 Circuit, Ground Bar Kit	36.34	6.43
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.43*	
26 05 26 00-0217	EA	24 Circuit, Ground Bar Kit	40.10	7.11
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.11*	
26 05 26 00-0218	EA	30 Circuit, Ground Bar Kit	44.82	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.12*	
26 05 26 00-0219	EA	54 Circuit, Ground Bar Kit	51.85	9.47
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.48*	
26 05 26 00-0220	EA	24 Circuit, Ground Bar Kit With #1 To 4/0 Aluminum/Copper Lug	57.02	7.11
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.11*	
26 05 26 00-0221	EA	30 Circuit, Ground Bar Kit With #1 To 4/0 Aluminum/Copper Lug	63.08	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.12*	
26 05 26 00-0222	EA	54 Circuit, Ground Bar Kit With #1 To 4/0 Aluminum/Copper Lug	70.28	9.47
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.48*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

26 05 29 Hangers and Supports for Electrical Systems *(26 05)*

26 05 29 00-0001 Metal Framing Channel And Fittings *(26 05 29)*

See CSI section 05 43 00 00-0001 for additional unistrut fittings.

26 05 29 00-0002 Metal Framing Channel *(26 05 29 00-0001)*

Note: Excludes fasteners and accessories.

26 05 29 00-0003 Steel Unistrut Channel *(26 05 29 00-0002)*

26 05 29 00-0004	EA	Up To 1' Cut Length x 1-5/8" Wide x 13/16" High, 14 Gauge, Steel Unistrut Channel	19.74	6.19
		For Galvanizing, Add	*1.08*	
		For Powder Coating, Add	*0.95*	
26 05 29 00-0005	EA	>1' To 2' Cut Length x 1-5/8" Wide x 13/16" High, 14 Gauge, Steel Unistrut Channel	29.18	8.24
		For Galvanizing, Add	*2.16*	
		For Powder Coating, Add	*1.90*	
26 05 29 00-0006	EA	>2' To 3' Cut Length x 1-5/8" Wide x 13/16" High, 14 Gauge, Steel Unistrut Channel	38.61	9.79
		For Galvanizing, Add	*3.24*	
		For Powder Coating, Add	*2.85*	
26 05 29 00-0007	EA	>3' To 4' Cut Length x 1-5/8" Wide x 13/16" High, 14 Gauge, Steel Unistrut Channel	48.05	11.33
		For Galvanizing, Add	*4.31*	
		For Powder Coating, Add	*3.81*	
26 05 29 00-0008	LF	>4' Cut Lengths x 1-5/8" Wide x 13/16" High, 14 Gauge, Steel Unistrut Channel	10.99	2.33
		For Galvanizing, Add	*1.08*	
		For Powder Coating, Add	*0.95*	
26 05 29 00-0009	EA	Up To 1' Cut Length x 1-5/8" Wide x 1-5/8" High, 14 Gauge, Steel Unistrut Channel	21.69	6.19
		For Galvanizing, Add	*1.41*	
		For Powder Coating, Add	*1.24*	
26 05 29 00-0010	EA	>1' To 2' Cut Length x 1-5/8" Wide x 1-5/8" High, 14 Gauge, Steel Unistrut Channel	33.07	8.24
		For Galvanizing, Add	*2.82*	
		For Powder Coating, Add	*2.49*	
26 05 29 00-0011	EA	>2' To 3' Cut Length x 1-5/8" Wide x 1-5/8" High, 14 Gauge, Steel Unistrut Channel	44.45	9.79
		For Galvanizing, Add	*4.23*	
		For Powder Coating, Add	*3.73*	
26 05 29 00-0012	EA	>3' To 4' Cut Length x 1-5/8" Wide x 1-5/8" High, 14 Gauge, Steel Unistrut Channel	55.83	11.33
		For Galvanizing, Add	*5.64*	
		For Powder Coating, Add	*4.97*	
26 05 29 00-0013	LF	>4' Cut Lengths x 1-5/8" Wide x 1-5/8" High, 14 Gauge, Steel Unistrut Channel	12.94	2.33
		For Galvanizing, Add	*1.41*	
		For Powder Coating, Add	*1.24*	
26 05 29 00-0014	EA	Up To 1' Cut Length x 1-5/8" Wide x 13/16" High, 12 Gauge, Steel Unistrut Channel	23.71	6.19
		For Galvanizing, Add	*1.75*	
		For Powder Coating, Add	*1.55*	
26 05 29 00-0015	EA	>1' To 2' Cut Length x 1-5/8" Wide x 13/16" High, 12 Gauge, Steel Unistrut Channel	37.11	8.24
		For Galvanizing, Add	*3.51*	
		For Powder Coating, Add	*3.09*	
26 05 29 00-0016	EA	>2' To 3' Cut Length x 1-5/8" Wide x 13/16" High, 12 Gauge, Steel Unistrut Channel	50.52	9.79
		For Galvanizing, Add	*5.26*	
		For Powder Coating, Add	*4.64*	
26 05 29 00-0017	EA	>3' To 4' Cut Length x 1-5/8" Wide x 13/16" High, 12 Gauge, Steel Unistrut Channel	63.92	11.33
		For Galvanizing, Add	*7.01*	
		For Powder Coating, Add	*6.19*	
26 05 29 00-0018	LF	>4' Cut Lengths x 1-5/8" Wide x 13/16" High, 12 Gauge, Steel Unistrut Channel	14.96	2.33
		For Galvanizing, Add	*1.75*	
		For Powder Coating, Add	*1.55*	
26 05 29 00-0019	EA	Up To 1' Cut Length x 1-5/8" Wide x 1-3/8" High, 12 Gauge, Steel Unistrut Channel	23.03	6.19
		For Galvanizing, Add	*1.64*	
		For Powder Coating, Add	*1.44*	
26 05 29 00-0020	EA	>1' To 2' Cut Length x 1-5/8" Wide x 1-3/8" High, 12 Gauge, Steel Unistrut Channel	35.74	8.24
		For Galvanizing, Add	*3.27*	
		For Powder Coating, Add	*2.89*	
26 05 29 00-0021	EA	>2' To 3' Cut Length x 1-5/8" Wide x 1-3/8" High, 12 Gauge, Steel Unistrut Channel	48.46	9.79
		For Galvanizing, Add	*4.91*	
		For Powder Coating, Add	*4.33*	
26 05 29 00-0022	EA	>3' To 4' Cut Length x 1-5/8" Wide x 1-3/8" High, 12 Gauge, Steel Unistrut Channel	61.18	11.33
		For Galvanizing, Add	*6.55*	
		For Powder Coating, Add	*5.78*	
26 05 29 00-0023	LF	>4' Cut Lengths x 1-5/8" Wide x 1-3/8" High, 12 Gauge, Steel Unistrut Channel	14.28	2.33
		For Galvanizing, Add	*1.64*	
		For Powder Coating, Add	*1.44*	
26 05 29 00-0024	EA	Up To 1' Cut Length x 1-5/8" Wide x 1-5/8" High, 12 Gauge, Steel Unistrut Channel	22.58	6.19
		For Galvanizing, Add	*1.56*	
		For Powder Coating, Add	*1.38*	
26 05 29 00-0025	EA	>1' To 2' Cut Length x 1-5/8" Wide x 1-5/8" High, 12 Gauge, Steel Unistrut Channel	34.85	8.24
		For Galvanizing, Add	*3.12*	
		For Powder Coating, Add	*2.75*	
26 05 29 00-0026	EA	>2' To 3' Cut Length x 1-5/8" Wide x 1-5/8" High, 12 Gauge, Steel Unistrut Channel	47.13	9.79
		For Galvanizing, Add	*4.68*	
		For Powder Coating, Add	*4.13*	
26 05 29 00-0027	EA	>3' To 4' Cut Length x 1-5/8" Wide x 1-5/8" High, 12 Gauge, Steel Unistrut Channel	59.40	11.33
		For Galvanizing, Add	*6.24*	
		For Powder Coating, Add	*5.51*	
26 05 29 00-0028	LF	>4' Cut Lengths x 1-5/8" Wide x 1-5/8" High, 12 Gauge, Steel Unistrut Channel	13.83	2.33
		For Galvanizing, Add	*1.56*	
		For Powder Coating, Add	*1.38*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 29 00-0029		Stainless Steel Unistrut Channel *(26 05 29 00-0002)*		
26 05 29 00-0030		304 Stainless Steel Unistrut Channel *(26 05 29 00-0029)*		
26 05 29 00-0031	EA	Up To 1' Cut Length x 1-5/8" Wide x 13/16" High, 14 Gauge, 304 Stainless Steel Unistrut Channel	33.52	6.19
26 05 29 00-0032	EA	>1' To 2' Cut Length x 1-5/8" Wide x 13/16" High, 14 Gauge, 304 Stainless Steel Unistrut Channel	56.72	8.24
26 05 29 00-0033	EA	>2' To 3' Cut Length x 1-5/8" Wide x 13/16" High, 14 Gauge, 304 Stainless Steel Unistrut Channel	79.93	9.79
26 05 29 00-0034	EA	>3' To 4' Cut Length x 1-5/8" Wide x 13/16" High, 14 Gauge, 304 Stainless Steel Unistrut Channel	103.14	11.33
26 05 29 00-0035	LF	>4' Cut Lengths x 1-5/8" Wide x 13/16" High, 14 Gauge, 304 Stainless Steel Unistrut Channel	24.76	2.33
26 05 29 00-0036	EA	Up To 1' Cut Length x 1-5/8" Wide x 1-5/8" High, 14 Gauge, 304 Stainless Steel Unistrut Channel	37.21	6.19
26 05 29 00-0037	EA	>1' To 2' Cut Length x 1-5/8" Wide x 1-5/8" High, 14 Gauge, 304 Stainless Steel Unistrut Channel	64.11	8.24
26 05 29 00-0038	EA	>2' To 3' Cut Length x 1-5/8" Wide x 1-5/8" High, 14 Gauge, 304 Stainless Steel Unistrut Channel	91.01	9.79
26 05 29 00-0039	EA	>3' To 4' Cut Length x 1-5/8" Wide x 1-5/8" High, 14 Gauge, 304 Stainless Steel Unistrut Channel	117.92	11.33
26 05 29 00-0040	LF	>4' Cut Lengths x 1-5/8" Wide x 1-5/8" High, 14 Gauge, 304 Stainless Steel Unistrut Channel	28.45	2.33
26 05 29 00-0041	EA	Up To 1' Cut Length x 1-5/8" Wide x 13/16" High, 12 Gauge, 304 Stainless Steel Unistrut Channel	38.43	6.19
26 05 29 00-0042	EA	>1' To 2' Cut Length x 1-5/8" Wide x 13/16" High, 12 Gauge, 304 Stainless Steel Unistrut Channel	66.56	8.24
26 05 29 00-0043	EA	>2' To 3' Cut Length x 1-5/8" Wide x 13/16" High, 12 Gauge, 304 Stainless Steel Unistrut Channel	94.68	9.79
26 05 29 00-0044	EA	>3' To 4' Cut Length x 1-5/8" Wide x 13/16" High, 12 Gauge, 304 Stainless Steel Unistrut Channel	122.81	11.33
26 05 29 00-0045	LF	>4' Cut Lengths x 1-5/8" Wide x 13/16" High, 12 Gauge, 304 Stainless Steel Unistrut Channel	29.68	2.33
26 05 29 00-0046	EA	Up To 1' Cut Length x 1-5/8" Wide x 1-5/8" High, 12 Gauge, 304 Stainless Steel Unistrut Channel	44.80	6.19
26 05 29 00-0047	EA	>1' To 2' Cut Length x 1-5/8" Wide x 1-5/8" High, 12 Gauge, 304 Stainless Steel Unistrut Channel	79.30	8.24
26 05 29 00-0048	EA	>2' To 3' Cut Length x 1-5/8" Wide x 1-5/8" High, 12 Gauge, 304 Stainless Steel Unistrut Channel	113.79	9.79
26 05 29 00-0049	EA	>3' To 4' Cut Length x 1-5/8" Wide x 1-5/8" High, 12 Gauge, 304 Stainless Steel Unistrut Channel	148.29	11.33
26 05 29 00-0050	LF	>4' Cut Lengths x 1-5/8" Wide x 1-5/8" High, 12 Gauge, 304 Stainless Steel Unistrut Channel	36.05	2.33
26 05 29 00-0051		316 Stainless Steel Unistrut Channel *(26 05 29 00-0029)*		
26 05 29 00-0052	EA	Up To 1' Cut Length x 1-5/8" Wide x 13/16" High, 14 Gauge, 316 Stainless Steel Unistrut Channel	49.46	6.19
26 05 29 00-0053	EA	>1' To 2' Cut Length x 1-5/8" Wide x 13/16" High, 14 Gauge, 316 Stainless Steel Unistrut Channel	88.62	8.24
26 05 29 00-0054	EA	>2' To 3' Cut Length x 1-5/8" Wide x 13/16" High, 14 Gauge, 316 Stainless Steel Unistrut Channel	127.77	9.79
26 05 29 00-0055	EA	>3' To 4' Cut Length x 1-5/8" Wide x 13/16" High, 14 Gauge, 316 Stainless Steel Unistrut Channel	166.92	11.33
26 05 29 00-0056	LF	>4' Cut Lengths x 1-5/8" Wide x 13/16" High, 14 Gauge, 316 Stainless Steel Unistrut Channel	40.70	2.33
26 05 29 00-0057		Aluminum Unistrut Channel *(26 05 29 00-0002)*		
26 05 29 00-0058	EA	Up To 1' Cut Length x 1-5/8" Wide x 13/16" High, 14 Gauge, Aluminum Unistrut Channel	18.60	6.19
26 05 29 00-0059	EA	>1' To 2' Cut Length x 1-5/8" Wide x 13/16" High, 14 Gauge, Aluminum Unistrut Channel	26.89	8.24
26 05 29 00-0060	EA	>2' To 3' Cut Length x 1-5/8" Wide x 13/16" High, 14 Gauge, Aluminum Unistrut Channel	35.17	9.79
26 05 29 00-0061	EA	>3' To 4' Cut Length x 1-5/8" Wide x 13/16" High, 14 Gauge, Aluminum Unistrut Channel	43.46	11.33
26 05 29 00-0062	LF	>4' Cut Lengths x 1-5/8" Wide x 13/16" High, 14 Gauge, Aluminum Unistrut Channel	9.85	2.33
26 05 29 00-0063	EA	Up To 1' Cut Length x 1-5/8" Wide x 1-5/8" High, 12 Gauge, Aluminum Unistrut Channel	22.00	6.19
26 05 29 00-0064	EA	>1' To 2' Cut Length x 1-5/8" Wide x 1-5/8" High, 12 Gauge, Aluminum Unistrut Channel	33.68	8.24
26 05 29 00-0065	EA	>2' To 3' Cut Length x 1-5/8" Wide x 1-5/8" High, 12 Gauge, Aluminum Unistrut Channel	45.37	9.79
26 05 29 00-0066	EA	>3' To 4' Cut Length x 1-5/8" Wide x 1-5/8" High, 12 Gauge, Aluminum Unistrut Channel	57.05	11.33
26 05 29 00-0067	LF	>4' Cut lengths x 1-5/8" Wide x 1-5/8" High, 12 Gauge, Aluminum Unistrut Channel	13.25	2.33
26 05 29 00-0068		Metal Framing Channel Fittings *(26 05 29 00-0001)*		
26 05 29 00-0069		Unistrut Channel Closure Strips And Caps *(26 05 29 00-0068)*		
26 05 29 00-0070		Steel Unistrut Channel Closure Strips And Caps *(26 05 29 00-0069)*		
26 05 29 00-0071	LF	Steel Raceway Closure Strip, Unistrut Channel Fittings	9.02	0.56
26 05 29 00-0072	EA	Steel End Cap, Unistrut Channel Fittings	5.92	1.42
26 05 29 00-0073		Stainless Steel Unistrut Channel Closure Strips And Caps *(26 05 29 00-0069)*		
26 05 29 00-0074	EA	Stainless Steel End Cap For Unistrut Channel	12.36	1.42
26 05 29 00-0075		Flat Splice Plate, Unistrut Channel Fittings *(26 05 29 00-0068)*		
26 05 29 00-0076		Steel Flat Splice Plate, Unistrut Channel Fittings *(26 05 29 00-0075)*		
26 05 29 00-0077	EA	2-Hole, 3-1/4" Length, In-Line, Flat Splice Plate, Steel, Unistrut Channel Fitting	8.46	
26 05 29 00-0078	EA	3-Hole, 5-3/8" Length, In-Line, Flat Splice Plate, Steel, Unistrut Channel Fitting	8.40	
26 05 29 00-0079	EA	4-Hole, 7-1/4" Length, In-Line, Flat Splice Plate, Steel, Unistrut Channel Fitting	10.44	
26 05 29 00-0080		Stainless Steel Flat Splice Plate, Unistrut Channel Fittings *(26 05 29 00-0075)*		
26 05 29 00-0081	EA	2-Hole, 3-1/2" Length, In-Line, Flat Splice Plate, 304 Stainless Steel, Unistrut Channel Fitting	17.73	
26 05 29 00-0082	EA	3-Hole, 5-3/8" Length, In-Line, Flat Splice Plate, 304 Stainless Steel, Unistrut Channel Fitting	26.40	
26 05 29 00-0083	EA	4-Hole, 7-1/4" Length, In-Line, Flat Splice Plate, 304 Stainless Steel, Unistrut Channel Fitting	33.73	
26 05 29 00-0084		90 Degree Angle, Unistrut Channel Fittings *(26 05 29 00-0068)*		
26 05 29 00-0085		Steel 90 Degree Angle, Unistrut Channel Fittings *(26 05 29 00-0084)*		
26 05 29 00-0086	EA	2-Hole, 1-7/8" x 2", 90 Degree Angle, Steel, Unistrut Channel Fitting	8.16	
26 05 29 00-0087	EA	2-Hole, 1-5/8" x 2-1/4", 90 Degree Angle, Steel, Unistrut Channel Fitting	6.66	
26 05 29 00-0088	EA	3-Hole, 1-5/8" x 4-1/8", 90 Degree Angle, Steel, Unistrut Channel Fitting	12.23	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 29 00-0089	EA	3-Hole, 1-7/8" x 3-7/8", 90 Degree Angle, Steel, Unistrut Channel Fitting	12.05	
26 05 29 00-0090		**Stainless Steel 90 Degree Angle, Unistrut Channel Fittings** *(26 05 29 00-0084)*		
26 05 29 00-0091	EA	2-Hole, 1-7/8" x 2", 90 Degree Angle, 304 Stainless Steel, Unistrut Channel Fitting	10.14	
26 05 29 00-0092	EA	2-Hole, 1-7/8" x 2", 90 Degree Angle, 316 Stainless Steel, Unistrut Channel Fitting	12.68	
26 05 29 00-0093	EA	2-Hole, 1-5/8" x 2-1/4", 90 Degree Angle, 304 Stainless Steel, Unistrut Channel Fitting	10.75	
26 05 29 00-0094	EA	2-Hole, 1-5/8" x 2-1/4", 90 Degree Angle, 316 Stainless Steel, Unistrut Channel Fitting	15.28	
26 05 29 00-0095	EA	3-Hole, 1-5/8" x 4-1/8", 90 Degree Angle, 304 Stainless Steel, Unistrut Channel Fitting	13.97	
26 05 29 00-0096	EA	3-Hole, 1-5/8" x 4-1/8", 90 Degree Angle, 316 Stainless Steel, Unistrut Channel Fitting	25.80	
26 05 29 00-0097	EA	3-Hole, 1-7/8" x 3-7/8", 90 Degree Angle, 304 Stainless Steel, Unistrut Channel Fitting	14.68	
26 05 29 00-0098	EA	3-Hole, 1-7/8" x 3-7/8", 90 Degree Angle, 316 Stainless Steel, Unistrut Channel Fitting	21.31	
26 05 29 00-0099		**60 Degree Angle, Unistrut Channel Fittings** *(26 05 29 00-0068)*		
26 05 29 00-0100		**Steel 60 Degree Angle, Unistrut Channel Fittings** *(26 05 29 00-0099)*		
26 05 29 00-0101	EA	2-Hole, 1-7/8" x 3-3/8", 60 Degree Angle, Steel, Unistrut Channel Fitting	17.92	
26 05 29 00-0102		**U-Connector, Unistrut Channel Fittings** *(26 05 29 00-0068)*		
26 05 29 00-0103		**Steel, U-Connector, Unistrut Channel Fittings** *(26 05 29 00-0102)*		
26 05 29 00-0104	EA	3-Hole, 1-5/8" x 13/16", U-Connector, Steel, Unistrut Channel Fitting	5.69	
26 05 29 00-0105	EA	5-Hole, 1-5/8" x 1-5/8", U-Connector, Steel, Unistrut Channel Fitting	6.46	
26 05 29 00-0106		**Stainless Steel, U-Connector, Unistrut Channel Fittings** *(26 05 29 00-0102)*		
26 05 29 00-0107	EA	5-Hole, 1-5/8" x 1-5/8", U-Connector, 304 Stainless Steel, Unistrut Channel Fitting	21.16	
26 05 29 00-0108		**Z-Bracket, Unistrut Channel Fittings** *(26 05 29 00-0068)*		
26 05 29 00-0109		**Steel Z-Bracket, Unistrut Channel Fittings** *(26 05 29 00-0108)*		
26 05 29 00-0110	EA	3-Hole, Z-Bracket, Steel, Unistrut Channel Fitting	18.42	
26 05 29 00-0111		**Stainless Steel Z-Bracket, Unistrut Channel Fittings** *(26 05 29 00-0108)*		
26 05 29 00-0112	EA	3-Hole, Z-Bracket, 304 Stainless Steel, Unistrut Channel Fitting	41.18	
26 05 29 00-0113		**Standard Pipe And Rigid Conduit Clamps For Unistrut Channel** *(26 05 29 00-0068)* Note: Includes hex screw and nut.		
26 05 29 00-0114		**Steel, Standard Pipe And Rigid Conduit Clamps For Unistrut Channel** *(26 05 29 00-0113)* Note: Includes hex screw and nut.		
26 05 29 00-0115	EA	1/2" Diameter, Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	5.58	1.70
26 05 29 00-0116	EA	3/4" Diameter, Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	5.61	1.70
26 05 29 00-0117	EA	1" Diameter, Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	5.79	1.70
26 05 29 00-0118	EA	1-1/4" Diameter, Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	7.16	2.26
26 05 29 00-0119	EA	1-1/2" Diameter, Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	8.05	2.26
26 05 29 00-0120	EA	2" Diameter, Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	8.14	2.26
26 05 29 00-0121	EA	2-1/2" Diameter, Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	9.91	2.82
26 05 29 00-0122	EA	3" Diameter, Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	10.70	2.82
26 05 29 00-0123	EA	3-1/2" Diameter, Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	11.46	2.82
26 05 29 00-0124	EA	4" Diameter, Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	11.74	2.82
26 05 29 00-0125		**304 Stainless Steel, Standard Pipe And Rigid Conduit Clamps For Unistrut Channel** *(26 05 29 00-0113)* Note: Includes hex screw and nut.		
26 05 29 00-0126	EA	1/2" Diameter, 304 Stainless Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	8.04	1.70
26 05 29 00-0127	EA	3/4" Diameter, 304 Stainless Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	9.01	1.70
26 05 29 00-0128	EA	1" Diameter, 304 Stainless Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	9.97	1.70
26 05 29 00-0129	EA	1-1/4" Diameter, 304 Stainless Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	12.37	2.26
26 05 29 00-0130	EA	1-1/2" Diameter, 304 Stainless Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	15.06	2.26
26 05 29 00-0131	EA	2" Diameter, 304 Stainless Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	15.76	2.26
26 05 29 00-0132	EA	2-1/2" Diameter, 304 Stainless Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	18.91	2.82
26 05 29 00-0133	EA	3" Diameter, 304 Stainless Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	21.30	2.82
26 05 29 00-0134	EA	3-1/2" Diameter, 304 Stainless Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	22.32	2.82
26 05 29 00-0135	EA	4" Diameter, 304 Stainless Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	26.11	2.82
26 05 29 00-0136		**316 Stainless Steel, Standard Pipe And Rigid Conduit Clamps For Unistrut Channel** *(26 05 29 00-0113)* Note: Includes hex screw and nut.		
26 05 29 00-0137	EA	1/2" Diameter, 316 Stainless Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	8.63	1.70
26 05 29 00-0138	EA	3/4" Diameter, 316 Stainless Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	9.99	1.70
26 05 29 00-0139	EA	1" Diameter, 316 Stainless Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	10.38	1.70
26 05 29 00-0140	EA	1-1/4" Diameter, 316 Stainless Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	12.56	2.26

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 29 00-0141	EA	1-1/2" Diameter, 316 Stainless Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	17.26	2.26
26 05 29 00-0142	EA	2" Diameter, 316 Stainless Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	17.49	2.26
26 05 29 00-0143	EA	2-1/2" Diameter, 316 Stainless Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	20.72	2.82
26 05 29 00-0144	EA	3" Diameter, 316 Stainless Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	21.93	2.82
26 05 29 00-0145	EA	3-1/2" Diameter, 316 Stainless Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	30.58	2.82
26 05 29 00-0146	EA	4" Diameter, 316 Stainless Steel, Standard Pipe And Rigid Conduit Clamp For Unistrut Channel	35.87	2.82
26 05 29 00-0147		Beam Clamps, Unistrut Channel Fittings *(26 05 29 00-0068)*		
26 05 29 00-0148		Steel Beam Clamps, Unistrut Channel Fittings *(26 05 29 00-0147)*		
26 05 29 00-0149	EA	Set Screw Beam Clamp, Steel Unistrut Channel Fitting	43.60	10.31
26 05 29 00-0150	EA	"C" Beam Clamp Use With 1/2" Rod, Steel Unistrut Channel Fittings	25.89	10.31
26 05 29 00-0151	EA	"U" Bolt Beam Clamp, Steel Unistrut Channel Fitting	41.81	10.31
26 05 29 00-0152		304 Stainless Steel Beam Clamps, Unistrut Channel Fittings *(26 05 29 00-0147)*		
26 05 29 00-0153	EA	"U" Bolt Beam Clamp, 304 Stainless Steel Unistrut Channel Fitting	49.23	10.31
26 05 29 00-0154		Square Washers For Unistrut Channel *(26 05 29 00-0068)*		
26 05 29 00-0155		Steel Square Washers For Unistrut Channel *(26 05 29 00-0154)*		
26 05 29 00-0156	EA	1/2" Bolt Size, Steel, Square Washer For Unistrut Channel	5.84	
26 05 29 00-0157		Stainless Steel Square Washers For Unistrut Channel *(26 05 29 00-0154)*		
26 05 29 00-0158	EA	1/2" Bolt Size, 304 Stainless Steel, Square Washer For Unistrut Channel	5.02	
26 05 29 00-0159	EA	1/2" Bolt Size, 316 Stainless Steel, Square Washer For Unistrut Channel	6.34	
26 05 29 00-0160		Strut Braces, Unistrut Channel Fittings *(26 05 29 00-0068)*		
26 05 29 00-0161	EA	16" Diagonal Steel Bar Brace For Unistrut Channel	52.34	
26 05 29 00-0162		Trolley Hangers, Unistrut Channel Fittings *(26 05 29 00-0068)*		
26 05 29 00-0163	EA	Steel Trolley Track Hanger For Unistrut Channel	64.58	
26 05 29 00-0164		Lock Nuts With Spring For Unistrut Channel *(26 05 29 00-0068)* Note: Includes hex bolt.		
26 05 29 00-0165		Steel Lock Nuts With Spring For Unistrut Channel *(26 05 29 00-0164)* Note: Includes hex bolt.		
26 05 29 00-0166	EA	1/4-20, Steel Lock Nut With Spring For Unistrut Channel	8.70	
26 05 29 00-0167	EA	3/8-16, Steel Lock Nut With Spring For Unistrut Channel	9.78	
26 05 29 00-0168	EA	1/2-13, Steel Lock Nut With Spring For Unistrut Channel	10.59	
26 05 29 00-0169	EA	5/8-11, Steel Lock Nut With Spring For Unistrut Channel	14.97	
26 05 29 00-0170		Stainless Steel Lock Nuts With Spring For Unistrut Channel *(26 05 29 00-0164)* Note: Includes hex bolt.		
26 05 29 00-0171	EA	1/4-20, 316 Stainless Steel Lock Nut With Spring For Unistrut Channel	15.38	
26 05 29 00-0172	EA	3/8-16, 316 Stainless Steel Lock Nut With Spring For Unistrut Channel	16.45	
26 05 29 00-0173	EA	1/2-13, 316 Stainless Steel Lock Nut With Spring For Unistrut Channel	22.98	
26 05 29 00-0174	EA	5/8-11, 316 Stainless Steel Lock Nut With Spring For Unistrut Channel	37.28	
26 05 29 00-0175		Lock Nuts Without Spring For Unistrut Channel *(26 05 29 00-0068)* Note: Includes hex bolt.		
26 05 29 00-0176		Steel Lock Nuts Without Spring For Unistrut Channel *(26 05 29 00-0175)* Note: Includes hex bolt.		
26 05 29 00-0177	EA	1/4-20, Steel Lock Nut Without Spring For Unistrut Channel	8.73	
26 05 29 00-0178	EA	3/8-16, Steel Lock Nut Without Spring For Unistrut Channel	9.93	
26 05 29 00-0179	EA	1/2-13, Steel Lock Nut Without Spring For Unistrut Channel	10.65	
26 05 29 00-0180	EA	5/8-11, Steel Lock Nut Without Spring For Unistrut Channel	16.23	
26 05 29 00-0181		Stainless Steel Lock Nuts Without Spring For Unistrut Channel *(26 05 29 00-0175)* Note: Includes hex bolt.		
26 05 29 00-0182	EA	1/4-20, 316 Stainless Steel Lock Nut Without Spring For Unistrut Channel	11.41	
26 05 29 00-0183	EA	3/8-16, 316 Stainless Steel Lock Nut Without Spring For Unistrut Channel	13.65	
26 05 29 00-0184	EA	1/2-13, 316 Stainless Steel Lock Nut Without Spring For Unistrut Channel	15.08	
26 05 29 00-0185	EA	5/8-11, 316 Stainless Steel Lock Nut Without Spring For Unistrut Channel	36.35	
26 05 29 00-0186		Mounting Assemblies *(26 05 29)*		
26 05 29 00-0187		Galvanized Steel Mounting Assemblies *(26 05 29 00-0186)*		
26 05 29 00-0188		Galvanized Steel Back Plate *(26 05 29 00-0187)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 29 00-0189	EA	1/4" x 4' x 4', Galvanized Steel Back Plate, Painted	567.35	67.68
26 05 29 00-0190	EA	3/8" x 14" x 16", Galvanized Steel Back Plate, Painted	137.20	22.56
26 05 29 00-0191	EA	3/16" x 30" x 48", Galvanized Steel Back Plate, Painted	347.79	56.40

26 05 29 00-0192 Aluminum Mounting Assemblies *(26 05 29 00-0186)*

26 05 29 00-0193 Aluminum Back Plate *(26 05 29 00-0192)*

26 05 29 00-0194	EA	3/16" x 2' x 2' Aluminum Back Plate	546.74	84.60
26 05 29 00-0195	EA	3/16" x 4' x 4' Aluminum Back Plate	1,668.54	84.60

26 05 29 00-0196 Supports *(26 05 29)*

26 05 29 00-0197 One Hole Steel Conduit Straps *(26 05 29 00-0196)*

26 05 29 00-0198	EA	1/2", One Hole Steel Conduit Strap	4.28	
		For Work In Restricted Working Space, Add	*1.08*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.00*	
		For >50 To 100, Deduct	*-0.20*	
		For >100 To 250, Deduct	*-0.39*	
		For >250 To 500, Deduct	*-0.77*	
		For >500, Deduct	*-1.15*	
26 05 29 00-0199	EA	3/4", One Hole Steel Conduit Strap	4.35	
		For Work In Restricted Working Space, Add	*1.08*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.00*	
		For >50 To 100, Deduct	*-0.20*	
		For >100 To 250, Deduct	*-0.40*	
		For >250 To 500, Deduct	*-0.78*	
		For >500, Deduct	*-1.16*	
26 05 29 00-0200	EA	1", One Hole Steel Conduit Strap	4.74	
		For Work In Restricted Working Space, Add	*1.08*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.00*	
		For >50 To 100, Deduct	*-0.21*	
		For >100 To 250, Deduct	*-0.42*	
		For >250 To 500, Deduct	*-0.81*	
		For >500, Deduct	*-1.20*	
26 05 29 00-0201	EA	1-1/4", One Hole Steel Conduit Strap	5.03	
		For Work In Restricted Working Space, Add	*1.08*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.00*	
		For >50 To 100, Deduct	*-0.22*	
		For >100 To 250, Deduct	*-0.43*	
		For >250 To 500, Deduct	*-0.83*	
		For >500, Deduct	*-1.23*	
26 05 29 00-0202	EA	1-1/2", One Hole Steel Conduit Strap	5.22	
		For Work In Restricted Working Space, Add	*1.08*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.00*	
		For >50 To 100, Deduct	*-0.22*	
		For >100 To 250, Deduct	*-0.44*	
		For >250 To 500, Deduct	*-0.84*	
		For >500, Deduct	*-1.24*	
26 05 29 00-0203	EA	2", One Hole Steel Conduit Strap	6.40	
		For Work In Restricted Working Space, Add	*1.08*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.00*	
		For >50 To 100, Deduct	*-0.25*	
		For >100 To 250, Deduct	*-0.50*	
		For >250 To 500, Deduct	*-0.93*	
		For >500, Deduct	*-1.36*	
26 05 29 00-0204	EA	2-1/2", One Hole Steel Conduit Strap	7.61	
		For Work In Restricted Working Space, Add	*1.08*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.00*	
		For >50 To 100, Deduct	*-0.28*	
		For >100 To 250, Deduct	*-0.56*	
		For >250 To 500, Deduct	*-1.02*	
		For >500, Deduct	*-1.48*	
26 05 29 00-0205	EA	3", One Hole Steel Conduit Strap	8.01	
		For Work In Restricted Working Space, Add	*1.08*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.00*	
		For >50 To 100, Deduct	*-0.29*	
		For >100 To 250, Deduct	*-0.58*	
		For >250 To 500, Deduct	*-1.05*	
		For >500, Deduct	*-1.52*	
26 05 29 00-0206	EA	3-1/2", One Hole Steel Conduit Strap	9.99	
		For Work In Restricted Working Space, Add	*1.08*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.00*	
		For >50 To 100, Deduct	*-0.34*	
		For >100 To 250, Deduct	*-0.68*	
		For >250 To 500, Deduct	*-1.20*	
		For >500, Deduct	*-1.72*	
26 05 29 00-0207	EA	4", One Hole Steel Conduit Strap	11.57	
		For Work In Restricted Working Space, Add	*1.08*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.00*	
		For >50 To 100, Deduct	*-0.38*	
		For >100 To 250, Deduct	*-0.76*	
		For >250 To 500, Deduct	*-1.32*	
		For >500, Deduct	*-1.88*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 29 00-0208		One Hole Iron Conduit Straps *(26 05 29 00-0196)*		
26 05 29 00-0209	EA	1/2", One Hole Iron Conduit Strap	4.47	
		For Work In Restricted Working Space, Add	*1.08*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.00*	
		For >50 To 100, Deduct	*-0.20*	
		For >100 To 250, Deduct	*-0.40*	
		For >250 To 500, Deduct	*-0.79*	
		For >500, Deduct	*-1.17*	
26 05 29 00-0210	EA	3/4", One Hole Iron Conduit Strap	4.66	
		For Work In Restricted Working Space, Add	*1.08*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.00*	
		For >50 To 100, Deduct	*-0.21*	
		For >100 To 250, Deduct	*-0.41*	
		For >250 To 500, Deduct	*-0.80*	
		For >500, Deduct	*-1.19*	
26 05 29 00-0211	EA	1", One Hole Iron Conduit Strap	5.00	
		For Work In Restricted Working Space, Add	*1.08*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.00*	
		For >50 To 100, Deduct	*-0.22*	
		For >100 To 250, Deduct	*-0.43*	
		For >250 To 500, Deduct	*-0.83*	
		For >500, Deduct	*-1.22*	
26 05 29 00-0212	EA	1-1/4", One Hole Iron Conduit Strap	5.82	
		For Work In Restricted Working Space, Add	*1.08*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.00*	
		For >50 To 100, Deduct	*-0.24*	
		For >100 To 250, Deduct	*-0.47*	
		For >250 To 500, Deduct	*-0.89*	
		For >500, Deduct	*-1.30*	
26 05 29 00-0213	EA	1-1/2", One Hole Iron Conduit Strap	6.15	
		For Work In Restricted Working Space, Add	*1.08*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.00*	
		For >50 To 100, Deduct	*-0.24*	
		For >100 To 250, Deduct	*-0.49*	
		For >250 To 500, Deduct	*-0.91*	
		For >500, Deduct	*-1.34*	
26 05 29 00-0214	EA	2", One Hole Iron Conduit Strap	8.24	
		For Work In Restricted Working Space, Add	*1.08*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.00*	
		For >50 To 100, Deduct	*-0.30*	
		For >100 To 250, Deduct	*-0.59*	
		For >250 To 500, Deduct	*-1.07*	
		For >500, Deduct	*-1.55*	
26 05 29 00-0215	EA	2-1/2", One Hole Iron Conduit Strap	12.72	
		For Work In Restricted Working Space, Add	*1.08*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.00*	
		For >50 To 100, Deduct	*-0.41*	
		For >100 To 250, Deduct	*-0.82*	
		For >250 To 500, Deduct	*-1.41*	
		For >500, Deduct	*-1.99*	
26 05 29 00-0216	EA	3", One Hole Iron Conduit Strap	16.46	
		For Work In Restricted Working Space, Add	*1.08*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.00*	
		For >50 To 100, Deduct	*-0.50*	
		For >100 To 250, Deduct	*-1.00*	
		For >250 To 500, Deduct	*-1.69*	
		For >500, Deduct	*-2.37*	
26 05 29 00-0217	EA	3-1/2", One Hole Iron Conduit Strap	21.93	
		For Work In Restricted Working Space, Add	*1.08*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.00*	
		For >50 To 100, Deduct	*-0.64*	
		For >100 To 250, Deduct	*-1.28*	
		For >250 To 500, Deduct	*-2.10*	
		For >500, Deduct	*-2.92*	
26 05 29 00-0218	EA	4", One Hole Iron Conduit Strap	43.81	
		For Work In Restricted Working Space, Add	*1.08*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.00*	
		For >50 To 100, Deduct	*-1.19*	
		For >100 To 250, Deduct	*-2.37*	
		For >250 To 500, Deduct	*-3.74*	
		For >500, Deduct	*-5.10*	
26 05 29 00-0219	EA	5", One Hole Iron Conduit Strap	55.57	
		For Work In Restricted Working Space, Add	*1.08*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.00*	
		For >50 To 100, Deduct	*-1.48*	
		For >100 To 250, Deduct	*-2.96*	
		For >250 To 500, Deduct	*-4.62*	
		For >500, Deduct	*-6.28*	
26 05 29 00-0220		Two Hole Steel Conduit Straps *(26 05 29 00-0196)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 29 00-0221	EA	1/2", Two Hole Steel Conduit Strap	4.93	
		For Work In Restricted Working Space, Add	*1.22*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.22*	
		For >50 To 100, Deduct	*-0.22*	
		For >100 To 250, Deduct	*-0.45*	
		For >250 To 500, Deduct	*-0.88*	
		For >500, Deduct	*-1.31*	
26 05 29 00-0222	EA	3/4", Two Hole Steel Conduit Strap	5.06	
		For Work In Restricted Working Space, Add	*1.22*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.22*	
		For >50 To 100, Deduct	*-0.23*	
		For >100 To 250, Deduct	*-0.46*	
		For >250 To 500, Deduct	*-0.89*	
		For >500, Deduct	*-1.32*	
26 05 29 00-0223	EA	1", Two Hole Steel Conduit Strap	5.12	
		For Work In Restricted Working Space, Add	*1.22*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.22*	
		For >50 To 100, Deduct	*-0.23*	
		For >100 To 250, Deduct	*-0.46*	
		For >250 To 500, Deduct	*-0.89*	
		For >500, Deduct	*-1.32*	
26 05 29 00-0224	EA	1-1/4", Two Hole Steel Conduit Strap	5.22	
		For Work In Restricted Working Space, Add	*1.22*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.22*	
		For >50 To 100, Deduct	*-0.23*	
		For >100 To 250, Deduct	*-0.46*	
		For >250 To 500, Deduct	*-0.90*	
		For >500, Deduct	*-1.33*	
26 05 29 00-0225	EA	1-1/2", Two Hole Steel Conduit Strap	5.28	
		For Work In Restricted Working Space, Add	*1.22*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.22*	
		For >50 To 100, Deduct	*-0.23*	
		For >100 To 250, Deduct	*-0.47*	
		For >250 To 500, Deduct	*-0.90*	
		For >500, Deduct	*-1.34*	
26 05 29 00-0226	EA	2", Two Hole Steel Conduit Strap	5.45	
		For Work In Restricted Working Space, Add	*1.22*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.22*	
		For >50 To 100, Deduct	*-0.24*	
		For >100 To 250, Deduct	*-0.48*	
		For >250 To 500, Deduct	*-0.92*	
		For >500, Deduct	*-1.36*	
26 05 29 00-0227	EA	2-1/2", Two Hole Steel Conduit Strap	6.35	
		For Work In Restricted Working Space, Add	*1.22*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.22*	
		For >50 To 100, Deduct	*-0.26*	
		For >100 To 250, Deduct	*-0.52*	
		For >250 To 500, Deduct	*-0.98*	
		For >500, Deduct	*-1.45*	
26 05 29 00-0228	EA	3", Two Hole Steel Conduit Strap	6.54	
		For Work In Restricted Working Space, Add	*1.22*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.22*	
		For >50 To 100, Deduct	*-0.27*	
		For >100 To 250, Deduct	*-0.53*	
		For >250 To 500, Deduct	*-1.00*	
		For >500, Deduct	*-1.47*	
26 05 29 00-0229	EA	3-1/2", Two Hole Steel Conduit Strap	7.25	
		For Work In Restricted Working Space, Add	*1.22*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.22*	
		For >50 To 100, Deduct	*-0.28*	
		For >100 To 250, Deduct	*-0.57*	
		For >250 To 500, Deduct	*-1.05*	
		For >500, Deduct	*-1.54*	
26 05 29 00-0230	EA	4", Two Hole Steel Conduit Strap	7.73	
		For Work In Restricted Working Space, Add	*1.22*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.22*	
		For >50 To 100, Deduct	*-0.29*	
		For >100 To 250, Deduct	*-0.59*	
		For >250 To 500, Deduct	*-1.09*	
		For >500, Deduct	*-1.59*	
26 05 29 00-0231	EA	5", Two Hole Steel Conduit Strap	8.38	
		For Work In Restricted Working Space, Add	*1.22*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.22*	
		For >50 To 100, Deduct	*-0.31*	
		For >100 To 250, Deduct	*-0.62*	
		For >250 To 500, Deduct	*-1.14*	
		For >500, Deduct	*-1.65*	

26 05 29 00-0232 Clamp Back Spacers *(26 05 29 00-0196)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 29 00-0233	EA	1/2" Conduit, Clamp Back Spacer	4.17	
		For Work In Restricted Working Space, Add	*0.85*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*0.81*	
		For >50 To 100, Deduct	*-0.17*	
		For >100 To 250, Deduct	*-0.35*	
		For >250 To 500, Deduct	*-0.67*	
		For >500, Deduct	*-0.98*	
26 05 29 00-0234	EA	3/4" Conduit, Clamp Back Spacer	4.65	
		For Work In Restricted Working Space, Add	*0.85*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*0.81*	
		For >50 To 100, Deduct	*-0.19*	
		For >100 To 250, Deduct	*-0.37*	
		For >250 To 500, Deduct	*-0.70*	
		For >500, Deduct	*-1.03*	
26 05 29 00-0235	EA	1" Conduit, Clamp Back Spacer	5.09	
		For Work In Restricted Working Space, Add	*0.85*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*0.81*	
		For >50 To 100, Deduct	*-0.20*	
		For >100 To 250, Deduct	*-0.40*	
		For >250 To 500, Deduct	*-0.73*	
		For >500, Deduct	*-1.07*	
26 05 29 00-0236	EA	1-1/4" Conduit, Clamp Back Spacer	6.81	
		For Work In Restricted Working Space, Add	*0.85*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*0.81*	
		For >50 To 100, Deduct	*-0.24*	
		For >100 To 250, Deduct	*-0.48*	
		For >250 To 500, Deduct	*-0.86*	
		For >500, Deduct	*-1.25*	
26 05 29 00-0237	EA	1-1/2" Conduit, Clamp Back Spacer	8.20	
		For Work In Restricted Working Space, Add	*0.85*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*0.81*	
		For >50 To 100, Deduct	*-0.28*	
		For >100 To 250, Deduct	*-0.55*	
		For >250 To 500, Deduct	*-0.97*	
		For >500, Deduct	*-1.38*	
26 05 29 00-0238	EA	2" Conduit, Clamp Back Spacer	9.65	
		For Work In Restricted Working Space, Add	*0.85*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*0.81*	
		For >50 To 100, Deduct	*-0.31*	
		For >100 To 250, Deduct	*-0.62*	
		For >250 To 500, Deduct	*-1.08*	
		For >500, Deduct	*-1.53*	
26 05 29 00-0239	EA	2-1/2" Conduit, Clamp Back Spacer	15.57	
		For Work In Restricted Working Space, Add	*0.85*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*0.81*	
		For >50 To 100, Deduct	*-0.46*	
		For >100 To 250, Deduct	*-0.92*	
		For >250 To 500, Deduct	*-1.52*	
		For >500, Deduct	*-2.12*	
26 05 29 00-0240	EA	3" Conduit, Clamp Back Spacer	22.63	
		For Work In Restricted Working Space, Add	*0.85*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*0.81*	
		For >50 To 100, Deduct	*-0.64*	
		For >100 To 250, Deduct	*-1.27*	
		For >250 To 500, Deduct	*-2.05*	
		For >500, Deduct	*-2.83*	
26 05 29 00-0241	EA	3-1/2" Conduit, Clamp Back Spacer	29.49	
		For Work In Restricted Working Space, Add	*0.85*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*0.81*	
		For >50 To 100, Deduct	*-0.81*	
		For >100 To 250, Deduct	*-1.62*	
		For >250 To 500, Deduct	*-2.56*	
		For >500, Deduct	*-3.51*	
26 05 29 00-0242	EA	4" Conduit, Clamp Back Spacer	61.71	
		For Work In Restricted Working Space, Add	*0.85*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*0.81*	
		For >50 To 100, Deduct	*-1.61*	
		For >100 To 250, Deduct	*-3.23*	
		For >250 To 500, Deduct	*-4.98*	
		For >500, Deduct	*-6.74*	
26 05 29 00-0243	EA	5" Conduit, Clamp Back Spacer	116.11	
		For Work In Restricted Working Space, Add	*0.85*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*0.81*	
		For >50 To 100, Deduct	*-2.97*	
		For >100 To 250, Deduct	*-5.95*	
		For >250 To 500, Deduct	*-9.06*	
		For >500, Deduct	*-12.18*	

26 05 29 00-0244 Conduit Clips *(26 05 29 00-0196)*

Note: Push in or clip.

26 05 29 00-0245	EA	1/2" Conduit Clip	4.84	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.00*	
		For >50 To 100, Deduct	*-0.21*	
		For >100 To 250, Deduct	*-0.42*	
		For >250 To 500, Deduct	*-0.81*	
		For >500, Deduct	*-1.21*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 29 00-0246	EA	3/4" Conduit Clip	4.84	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.00*	
		For >50 To 100, Deduct	*-0.21*	
		For >100 To 250, Deduct	*-0.42*	
		For >250 To 500, Deduct	*-0.81*	
		For >500, Deduct	*-1.21*	
26 05 29 00-0247	EA	1" Conduit Clip	4.74	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.00*	
		For >50 To 100, Deduct	*-0.21*	
		For >100 To 250, Deduct	*-0.42*	
		For >250 To 500, Deduct	*-0.81*	
		For >500, Deduct	*-1.20*	
26 05 29 00-0248	EA	1-1/4" Conduit Clip	4.98	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.00*	
		For >50 To 100, Deduct	*-0.21*	
		For >100 To 250, Deduct	*-0.43*	
		For >250 To 500, Deduct	*-0.82*	
		For >500, Deduct	*-1.22*	

26 05 29 00-0249 Bolt And Nut Conduit Clips *(26 05 29 00-0196)*

26 05 29 00-0250	EA	3/4" Bolt And Nut Conduit Clip (Minerallac 1B)	6.00	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.23*	
		For >50 To 100, Deduct	*-0.26*	
		For >100 To 250, Deduct	*-0.53*	
		For >250 To 500, Deduct	*-1.01*	
		For >500, Deduct	*-1.50*	
26 05 29 00-0251	EA	1" Bolt And Nut Conduit Clip (Minerallac 2B)	6.24	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.23*	
		For >50 To 100, Deduct	*-0.27*	
		For >100 To 250, Deduct	*-0.54*	
		For >250 To 500, Deduct	*-1.03*	
		For >500, Deduct	*-1.53*	
26 05 29 00-0252	EA	1-1/4" Bolt And Nut Conduit Clip (Minerallac 2-1/2B)	6.65	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.30*	
		For >50 To 100, Deduct	*-0.29*	
		For >100 To 250, Deduct	*-0.57*	
		For >250 To 500, Deduct	*-1.10*	
		For >500, Deduct	*-1.62*	
26 05 29 00-0253	EA	1-1/2" Bolt And Nut Conduit Clip (Minerallac 3B)	6.79	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.30*	
		For >50 To 100, Deduct	*-0.29*	
		For >100 To 250, Deduct	*-0.58*	
		For >250 To 500, Deduct	*-1.11*	
		For >500, Deduct	*-1.64*	
26 05 29 00-0254	EA	2" Bolt And Nut Conduit Clip (Minerallac 5B)	7.70	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.30*	
		For >50 To 100, Deduct	*-0.31*	
		For >100 To 250, Deduct	*-0.62*	
		For >250 To 500, Deduct	*-1.18*	
		For >500, Deduct	*-1.73*	
26 05 29 00-0255	EA	2-1/2" Bolt And Nut Conduit Clip (Minerallac 6B)	8.36	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.37*	
		For >50 To 100, Deduct	*-0.34*	
		For >100 To 250, Deduct	*-0.67*	
		For >250 To 500, Deduct	*-1.26*	
		For >500, Deduct	*-1.85*	
26 05 29 00-0256	EA	3" Bolt And Nut Conduit Clip (Minerallac 7B)	9.17	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.37*	
		For >50 To 100, Deduct	*-0.36*	
		For >100 To 250, Deduct	*-0.71*	
		For >250 To 500, Deduct	*-1.32*	
		For >500, Deduct	*-1.93*	
26 05 29 00-0257	EA	4" Bolt And Nut Conduit Clip (Minerallac 9B)	17.34	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.51*	
		For >50 To 100, Deduct	*-0.57*	
		For >100 To 250, Deduct	*-1.15*	
		For >250 To 500, Deduct	*-2.01*	
		For >500, Deduct	*-2.86*	

26 05 29 00-0258 Conduit Hanger From Flange, Wire Or Rod *(26 05 29 00-0196)*

Note: Bat wing.

26 05 29 00-0259	EA	1/2", Conduit Hanger From Flange, Wire Or Rod	3.48	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*0.78*	
		For >50 To 100, Deduct	*-0.15*	
		For >100 To 250, Deduct	*-0.31*	
		For >250 To 500, Deduct	*-0.60*	
		For >500, Deduct	*-0.89*	
26 05 29 00-0260	EA	3/4", Conduit Hanger From Flange, Wire Or Rod	3.54	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*0.78*	
		For >50 To 100, Deduct	*-0.16*	
		For >100 To 250, Deduct	*-0.31*	
		For >250 To 500, Deduct	*-0.60*	
		For >500, Deduct	*-0.90*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 29 00-0261	EA	1", Conduit Hanger From Flange, Wire Or Rod	3.73	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*0.78*	
		For >50 To 100, Deduct	*-0.16*	
		For >100 To 250, Deduct	*-0.32*	
		For >250 To 500, Deduct	*-0.62*	
		For >500, Deduct	*-0.92*	
26 05 29 00-0262	EA	1-1/4", Conduit Hanger From Flange, Wire Or Rod	4.18	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*0.78*	
		For >50 To 100, Deduct	*-0.17*	
		For >100 To 250, Deduct	*-0.34*	
		For >250 To 500, Deduct	*-0.65*	
		For >500, Deduct	*-0.96*	

26 05 29 00-0263 Beam Flange Clamps *(26 05 29 00-0196)*

Note: For threaded rod, nut not required.

26 05 29 00-0264	EA	1/8" To 1/4" Flange Thickness, Beam Clamp (Caddy 6TA24)	5.37	
		For >50 To 100, Deduct	*-0.20*	
		For >100 To 250, Deduct	*-0.41*	
		For >250 To 500, Deduct	*-0.76*	
		For >500, Deduct	*-1.10*	
26 05 29 00-0265	EA	5/16" To 1/2" Flange Thickness, Beam Clamp (Caddy 6TA58)	5.25	
		For >50 To 100, Deduct	*-0.20*	
		For >100 To 250, Deduct	*-0.40*	
		For >250 To 500, Deduct	*-0.75*	
		For >500, Deduct	*-1.09*	
26 05 29 00-0266	EA	9/16" To 3/4" Flange Thickness, Beam Clamp (Caddy 6TA912)	5.96	
		For >50 To 100, Deduct	*-0.22*	
		For >100 To 250, Deduct	*-0.44*	
		For >250 To 500, Deduct	*-0.80*	
		For >500, Deduct	*-1.16*	

26 05 29 00-0267 T-Bar Support Clips *(26 05 29 00-0196)*

26 05 29 00-0268	EA	9/16" Grid Size, Independent T-Bar Support Clip (Caddy IDS95)	8.73	
		For >50 To 100, Deduct	*-0.36*	
		For >100 To 250, Deduct	*-0.72*	
		For >250 To 500, Deduct	*-1.36*	
		For >500, Deduct	*-2.00*	
26 05 29 00-0269	EA	15/16" Grid Size, Independent T-Bar Support Clip (Caddy IDS)	8.19	
		For >50 To 100, Deduct	*-0.35*	
		For >100 To 250, Deduct	*-0.69*	
		For >250 To 500, Deduct	*-1.32*	
		For >500, Deduct	*-1.95*	
26 05 29 00-0270	EA	15/16 Grid Size, Twist On T-Bar Support Clip (Caddy 4G16)	3.31	
		For >50 To 100, Deduct	*-0.12*	
		For >100 To 250, Deduct	*-0.24*	
		For >250 To 500, Deduct	*-0.42*	
		For >500, Deduct	*-0.61*	
26 05 29 00-0271	EA	24" Long Snap On T-Bar Electrical Box Hanger (Caddy 512)	29.54	
		For >50 To 100, Deduct	*-0.80*	
		For >100 To 250, Deduct	*-1.59*	
		For >250 To 500, Deduct	*-2.50*	
		For >500, Deduct	*-3.41*	

26 05 29 00-0272 Switch And Outlet Box Type Supports *(26 05 29 00-0196)*

26 05 29 00-0273	EA	1/4" To 3/4" Drywall Thickness, Adjustable Switch And Outlet Box Support (Caddy MFS)	6.92	
		For >50 To 100, Deduct	*-0.23*	
		For >100 To 250, Deduct	*-0.46*	
		For >250 To 500, Deduct	*-0.80*	
		For >500, Deduct	*-1.14*	
26 05 29 00-0274	EA	1/2" Drywall Thickness, Riveted Switch And Outlet Box Support (Caddy MF500)	5.77	
		For >50 To 100, Deduct	*-0.20*	
		For >100 To 250, Deduct	*-0.40*	
		For >250 To 500, Deduct	*-0.72*	
		For >500, Deduct	*-1.03*	
26 05 29 00-0275	EA	Flush, Riveted Switch And Outlet Box Support (Caddy MFO)	6.76	
		For >50 To 100, Deduct	*-0.23*	
		For >100 To 250, Deduct	*-0.45*	
		For >250 To 500, Deduct	*-0.79*	
		For >500, Deduct	*-1.13*	
26 05 29 00-0276	EA	Snap On, Switch And Outlet Box Support (Caddy MSF)	4.13	
		For >50 To 100, Deduct	*-0.16*	
		For >100 To 250, Deduct	*-0.32*	
		For >250 To 500, Deduct	*-0.59*	
		For >500, Deduct	*-0.87*	
26 05 29 00-0277	EA	1/4-20 Thread Impression, Switch And Outlet Box Support (Caddy MFI)	4.34	
		For >50 To 100, Deduct	*-0.17*	
		For >100 To 250, Deduct	*-0.33*	
		For >250 To 500, Deduct	*-0.61*	
		For >500, Deduct	*-0.89*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 29 00-0278		**Lighting Fixture Hanger** *(26 05 29 00-0196)*		
		Note: For existing or owner furnished fixtures.		
26 05 29 00-0279	EA	Lay-In/Troffer, Straight Lip Type Fixture Support Clip (Caddy 515)	5.63	
		For >50 To 100, Deduct	*-0.25*	
		For >100 To 250, Deduct	*-0.51*	
		For >250 To 500, Deduct	*-0.99*	
		For >500, Deduct	*-1.47*	
26 05 29 00-0280	PR	Support Bars For Recessed "High Hat" Light Fixtures (Caddy 517)	22.65	
		For >50 To 100, Deduct	*-0.68*	
		For >100 To 250, Deduct	*-1.36*	
		For >250 To 500, Deduct	*-2.26*	
		For >500, Deduct	*-3.17*	
26 05 29 00-0281	PR	Support Bars For Recessed "Lightolier" Light Fixtures (Caddy 520)	31.60	
		For >50 To 100, Deduct	*-0.90*	
		For >100 To 250, Deduct	*-1.81*	
		For >250 To 500, Deduct	*-2.93*	
		For >500, Deduct	*-4.06*	
26 05 29 00-0282		**Rigid Steel Conduit Clamps For Unistrut Channel** *(26 05 29 00-0196)*		
26 05 29 00-0283	EA	1/2" Diameter, Rigid Steel Conduit Clamp For Unistrut Channel	5.58	
		For >50 To 100, Deduct	*-0.22*	
		For >100 To 250, Deduct	*-0.45*	
		For >250 To 500, Deduct	*-0.84*	
		For >500, Deduct	*-1.24*	
		For Work In Restricted Working Space, Add	*1.02*	
26 05 29 00-0284	EA	3/4" Diameter, Rigid Steel Conduit Clamp For Unistrut Channel	5.61	
		For >50 To 100, Deduct	*-0.23*	
		For >100 To 250, Deduct	*-0.45*	
		For >250 To 500, Deduct	*-0.84*	
		For >500, Deduct	*-1.24*	
		For Work In Restricted Working Space, Add	*1.02*	
26 05 29 00-0285	EA	1" Diameter, Rigid Steel Conduit Clamp For Unistrut Channel	5.79	
		For >50 To 100, Deduct	*-0.23*	
		For >100 To 250, Deduct	*-0.46*	
		For >250 To 500, Deduct	*-0.86*	
		For >500, Deduct	*-1.26*	
		For Work In Restricted Working Space, Add	*1.02*	
26 05 29 00-0286	EA	1-1/4" Diameter, Rigid Steel Conduit Clamp For Unistrut Channel	7.15	
		For >50 To 100, Deduct	*-0.29*	
		For >100 To 250, Deduct	*-0.58*	
		For >250 To 500, Deduct	*-1.10*	
		For >500, Deduct	*-1.62*	
		For Work In Restricted Working Space, Add	*1.35*	
26 05 29 00-0287	EA	1-1/2" Diameter, Rigid Steel Conduit Clamp For Unistrut Channel	8.04	
		For >50 To 100, Deduct	*-0.31*	
		For >100 To 250, Deduct	*-0.63*	
		For >250 To 500, Deduct	*-1.17*	
		For >500, Deduct	*-1.71*	
		For Work In Restricted Working Space, Add	*1.35*	
26 05 29 00-0288	EA	2" Diameter, Rigid Steel Conduit Clamp For Unistrut Channel	8.13	
		For >50 To 100, Deduct	*-0.32*	
		For >100 To 250, Deduct	*-0.63*	
		For >250 To 500, Deduct	*-1.17*	
		For >500, Deduct	*-1.72*	
		For Work In Restricted Working Space, Add	*1.35*	
26 05 29 00-0289	EA	2-1/2" Diameter, Rigid Steel Conduit Clamp For Unistrut Channel	9.90	
		For >50 To 100, Deduct	*-0.39*	
		For >100 To 250, Deduct	*-0.78*	
		For >250 To 500, Deduct	*-1.45*	
		For >500, Deduct	*-2.12*	
		For Work In Restricted Working Space, Add	*1.69*	
26 05 29 00-0290	EA	3" Diameter, Rigid Steel Conduit Clamp For Unistrut Channel	10.69	
		For >50 To 100, Deduct	*-0.41*	
		For >100 To 250, Deduct	*-0.82*	
		For >250 To 500, Deduct	*-1.51*	
		For >500, Deduct	*-2.20*	
		For Work In Restricted Working Space, Add	*1.69*	
26 05 29 00-0291	EA	3-1/2" Diameter, Rigid Steel Conduit Clamp For Unistrut Channel	11.45	
		For >50 To 100, Deduct	*-0.43*	
		For >100 To 250, Deduct	*-0.85*	
		For >250 To 500, Deduct	*-1.56*	
		For >500, Deduct	*-2.27*	
		For Work In Restricted Working Space, Add	*1.69*	
26 05 29 00-0292	EA	4" Diameter, Rigid Steel Conduit Clamp For Unistrut Channel	11.73	
		For >50 To 100, Deduct	*-0.43*	
		For >100 To 250, Deduct	*-0.87*	
		For >250 To 500, Deduct	*-1.58*	
		For >500, Deduct	*-2.30*	
		For Work In Restricted Working Space, Add	*1.69*	
26 05 29 00-0293		**Electrical Metallic Tubing (EMT) Conduit Clamps For Unistrut Channel** *(26 05 29 00-0196)*		

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 29 00-0294	EA	1/2" Diameter, Electrical Metallic Tubing (EMT) Conduit Clamp For Unistrut Channel	6.16	
		For >50 To 100, Deduct	*-0.24*	
		For >100 To 250, Deduct	*-0.48*	
		For >250 To 500, Deduct	*-0.89*	
		For >500, Deduct	*-1.29*	
		For Work In Restricted Working Space, Add	*1.02*	
26 05 29 00-0295	EA	3/4" Diameter, Electrical Metallic Tubing (EMT) Conduit Clamp For Unistrut Channel	6.09	
		For >50 To 100, Deduct	*-0.24*	
		For >100 To 250, Deduct	*-0.47*	
		For >250 To 500, Deduct	*-0.88*	
		For >500, Deduct	*-1.29*	
		For Work In Restricted Working Space, Add	*1.02*	
26 05 29 00-0296	EA	1" Diameter, Electrical Metallic Tubing (EMT) Conduit Clamp For Unistrut Channel	6.00	
		For >50 To 100, Deduct	*-0.23*	
		For >100 To 250, Deduct	*-0.47*	
		For >250 To 500, Deduct	*-0.87*	
		For >500, Deduct	*-1.28*	
		For Work In Restricted Working Space, Add	*1.02*	
26 05 29 00-0297	EA	1-1/4" Diameter, Electrical Metallic Tubing (EMT) Conduit Clamp For Unistrut Channel	7.86	
		For >50 To 100, Deduct	*-0.31*	
		For >100 To 250, Deduct	*-0.62*	
		For >250 To 500, Deduct	*-1.15*	
		For >500, Deduct	*-1.69*	
		For Work In Restricted Working Space, Add	*1.35*	
26 05 29 00-0298	EA	1-1/2" Diameter, Electrical Metallic Tubing (EMT) Conduit Clamp For Unistrut Channel	9.41	
		For >50 To 100, Deduct	*-0.35*	
		For >100 To 250, Deduct	*-0.70*	
		For >250 To 500, Deduct	*-1.27*	
		For >500, Deduct	*-1.84*	
		For Work In Restricted Working Space, Add	*1.35*	
26 05 29 00-0299	EA	2" Diameter, Electrical Metallic Tubing (EMT) Conduit Clamp For Unistrut Channel	9.50	
		For >50 To 100, Deduct	*-0.35*	
		For >100 To 250, Deduct	*-0.70*	
		For >250 To 500, Deduct	*-1.28*	
		For >500, Deduct	*-1.85*	
		For Work In Restricted Working Space, Add	*1.35*	
26 05 29 00-0300		"J" Type Conduit Hangers *(26 05 29 00-0196)*		
26 05 29 00-0301	EA	1/2", "J" Type Conduit Hanger (Unistrut J1205)	26.68	
		For >50 To 100, Deduct	*-0.86*	
		For >100 To 250, Deduct	*-1.73*	
		For >250 To 500, Deduct	*-2.99*	
		For >500, Deduct	*-4.25*	
		For Work In Restricted Working Space, Add	*2.37*	
26 05 29 00-0302	EA	3/4", "J" Type Conduit Hanger (Unistrut J1207)	27.00	
		For >50 To 100, Deduct	*-0.87*	
		For >100 To 250, Deduct	*-1.75*	
		For >250 To 500, Deduct	*-3.01*	
		For >500, Deduct	*-4.28*	
		For Work In Restricted Working Space, Add	*2.37*	
26 05 29 00-0303	EA	1", "J" Type Conduit Hanger (Unistrut J1210)	28.43	
		For >50 To 100, Deduct	*-0.94*	
		For >100 To 250, Deduct	*-1.87*	
		For >250 To 500, Deduct	*-3.26*	
		For >500, Deduct	*-4.65*	
		For Work In Restricted Working Space, Add	*2.71*	
26 05 29 00-0304	EA	1-1/4", "J" Type Conduit Hanger (Unistrut J1212)	28.78	
		For >50 To 100, Deduct	*-0.95*	
		For >100 To 250, Deduct	*-1.89*	
		For >250 To 500, Deduct	*-3.29*	
		For >500, Deduct	*-4.68*	
		For Work In Restricted Working Space, Add	*2.71*	
26 05 29 00-0305	EA	1-1/2", "J" Type Conduit Hanger (Unistrut J1215)	30.14	
		For >50 To 100, Deduct	*-1.01*	
		For >100 To 250, Deduct	*-2.01*	
		For >250 To 500, Deduct	*-3.53*	
		For >500, Deduct	*-5.04*	
		For Work In Restricted Working Space, Add	*3.05*	
26 05 29 00-0306	EA	2", "J" Type Conduit Hanger (Unistrut J1220)	31.48	
		For >50 To 100, Deduct	*-1.04*	
		For >100 To 250, Deduct	*-2.08*	
		For >250 To 500, Deduct	*-3.63*	
		For >500, Deduct	*-5.18*	
		For Work In Restricted Working Space, Add	*3.05*	
26 05 29 00-0307	EA	2-1/2", "J" Type Conduit Hanger (Unistrut J1225)	51.67	
		For >50 To 100, Deduct	*-1.57*	
		For >100 To 250, Deduct	*-3.15*	
		For >250 To 500, Deduct	*-5.29*	
		For >500, Deduct	*-7.42*	
		For Work In Restricted Working Space, Add	*3.38*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 29 00-0308	EA	3", "J" Type Conduit Hanger (Unistrut J1230)	54.81	
		For >50 To 100, Deduct	*-1.68*	
		For >100 To 250, Deduct	*-3.36*	
		For >250 To 500, Deduct	*-5.66*	
		For >500, Deduct	*-7.96*	
		For Work In Restricted Working Space, Add	*3.72*	
26 05 29 00-0309	EA	3-1/2", "J" Type Conduit Hanger (Unistrut J1235)	58.95	
		For >50 To 100, Deduct	*-1.81*	
		For >100 To 250, Deduct	*-3.62*	
		For >250 To 500, Deduct	*-6.11*	
		For >500, Deduct	*-8.60*	
		For Work In Restricted Working Space, Add	*4.06*	
26 05 29 00-0310	EA	4", "J" Type Conduit Hanger (Unistrut J1240)	79.62	
		For >50 To 100, Deduct	*-2.33*	
		For >100 To 250, Deduct	*-4.66*	
		For >250 To 500, Deduct	*-7.66*	
		For >500, Deduct	*-10.67*	
		For Work In Restricted Working Space, Add	*4.06*	
26 05 29 00-0311	EA	5", "J" Type Conduit Hanger (Unistrut J1250)	87.54	
		For >50 To 100, Deduct	*-2.56*	
		For >100 To 250, Deduct	*-5.11*	
		For >250 To 500, Deduct	*-8.40*	
		For >500, Deduct	*-11.69*	
		For Work In Restricted Working Space, Add	*4.40*	
26 05 29 00-0312	EA	6", "J" Type Conduit Hanger (Unistrut J1260)	124.45	
		For >50 To 100, Deduct	*-3.53*	
		For >100 To 250, Deduct	*-7.07*	
		For >250 To 500, Deduct	*-11.45*	
		For >500, Deduct	*-15.83*	
		For Work In Restricted Working Space, Add	*5.08*	

26 05 29 00-0313 Between Studs Box Brackets *(26 05 29 00-0196)*

26 05 29 00-0314	EA	16" Stud Spacing, 1-1/2" Or 2-1/8" Box Depth, Screw Gun Between Studs Box Bracket (Caddy SGB16A)	9.48	
		For >50 To 100, Deduct	*-0.32*	
		For >100 To 250, Deduct	*-0.64*	
		For >250 To 500, Deduct	*-1.13*	
		For >500, Deduct	*-1.63*	
		For Work In Restricted Working Space, Add	*1.02*	
26 05 29 00-0315	EA	24" Stud Spacing, 1-1/2" Or 2-1/8" Box Depth, Screw Gun Between Studs Box Bracket (Caddy SGB24A)	11.58	
		For >50 To 100, Deduct	*-0.37*	
		For >100 To 250, Deduct	*-0.75*	
		For >250 To 500, Deduct	*-1.29*	
		For >500, Deduct	*-1.84*	
		For Work In Restricted Working Space, Add	*1.02*	

26 05 29 00-0316 Hangers And Brackets *(26 05 29 00-0196)*

26 05 29 00-0317	EA	Rod Hangers Only With 1/4" Thread Impression (Caddy 4TI)	3.06	
		For >50 To 100, Deduct	*-0.13*	
		For >100 To 250, Deduct	*-0.27*	
		For >250 To 500, Deduct	*-0.51*	
		For >500, Deduct	*-0.76*	
26 05 29 00-0318	EA	Angle Bracket Only With 1/4" Hole (Caddy AB)	2.94	
		For >50 To 100, Deduct	*-0.13*	
		For >100 To 250, Deduct	*-0.26*	
		For >250 To 500, Deduct	*-0.50*	
		For >500, Deduct	*-0.75*	
26 05 29 00-0319	EA	Offset Bracket Only With 1/4" Hole (Caddy AO)	2.94	
		For >50 To 100, Deduct	*-0.13*	
		For >100 To 250, Deduct	*-0.26*	
		For >250 To 500, Deduct	*-0.50*	
		For >500, Deduct	*-0.75*	
26 05 29 00-0320	EA	Angle Bracket Mount, 1/4" Threaded Rod Hanger With Thread Impression (Caddy 4TIB)	4.20	
		For >50 To 100, Deduct	*-0.16*	
		For >100 To 250, Deduct	*-0.32*	
		For >250 To 500, Deduct	*-0.60*	
		For >500, Deduct	*-0.87*	
26 05 29 00-0321	EA	Angle Bracket Mount, 3/8" Threaded Rod Hanger With Thread Impression (Caddy 6TIB)	4.23	
		For >50 To 100, Deduct	*-0.16*	
		For >100 To 250, Deduct	*-0.32*	
		For >250 To 500, Deduct	*-0.60*	
		For >500, Deduct	*-0.88*	
26 05 29 00-0322	EA	Angle Bracket Mount, 1/4" Or 3/8" Threaded Rod Hanger With Nut (Caddy 6TB)	4.09	
		For >50 To 100, Deduct	*-0.16*	
		For >100 To 250, Deduct	*-0.32*	
		For >250 To 500, Deduct	*-0.59*	
		For >500, Deduct	*-0.86*	
26 05 29 00-0323	EA	Offset Bracket Mount, 1/4" Threaded Rod Hanger With Thread Impression (Caddy 4TIO)	4.20	
		For >50 To 100, Deduct	*-0.16*	
		For >100 To 250, Deduct	*-0.32*	
		For >250 To 500, Deduct	*-0.60*	
		For >500, Deduct	*-0.87*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 29 00-0324	EA	Offset Bracket Mount, 3/8" Threaded Rod Hanger With Thread Impression (Caddy 6TIO)	4.23	
		For >50 To 100, Deduct	*-0.16*	
		For >100 To 250, Deduct	*-0.32*	
		For >250 To 500, Deduct	*-0.60*	
		For >500, Deduct	*-0.88*	

26 05 29 00-0325 Clips And Accessories *(26 05 29 00-0196)*

26 05 29 00-0326	EA	1/2" Diameter Center, Bridle Ring (Caddy 2BR)	2.11	
		For >50 To 100, Deduct	*-0.09*	
		For >100 To 250, Deduct	*-0.18*	
		For >250 To 500, Deduct	*-0.33*	
		For >500, Deduct	*-0.49*	
26 05 29 00-0327	EA	3/4" Diameter Center, Bridle Ring (Caddy 2BR12)	2.16	
		For >50 To 100, Deduct	*-0.09*	
		For >100 To 250, Deduct	*-0.18*	
		For >250 To 500, Deduct	*-0.34*	
		For >500, Deduct	*-0.50*	
26 05 29 00-0328	EA	1-1/4" Diameter Center, Bridle Ring (Caddy 2BR20)	2.35	
		For >50 To 100, Deduct	*-0.09*	
		For >100 To 250, Deduct	*-0.19*	
		For >250 To 500, Deduct	*-0.35*	
		For >500, Deduct	*-0.52*	
26 05 29 00-0329	EA	2" Diameter Center, Bridle Ring (Caddy 2BR32)	2.74	
		For >50 To 100, Deduct	*-0.10*	
		For >100 To 250, Deduct	*-0.21*	
		For >250 To 500, Deduct	*-0.38*	
		For >500, Deduct	*-0.56*	

26 05 29 00-0330 Wire Ties *(26 05 29 00-0196)*

Note: Per hundred (C).

26 05 29 00-0331	C	3" Length, 18 Lb. Tensile Strength, Nylon Cable Ties	29.58	
		For Up To 0.1, Add	*23.54*	
		For >0.1 To 0.25, Add	*11.77*	
		For >0.25 To 0.75, Add	*5.89*	
		For >2.0, Deduct	*-2.35*	
		For UV Black, Add	*0.91*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.06*	
26 05 29 00-0332	C	4" Length, 18 Lb. Tensile Strength, Nylon Cable Ties	29.81	
		For Up To 0.1, Add	*23.54*	
		For >0.1 To 0.25, Add	*11.77*	
		For >0.25 To 0.75, Add	*5.89*	
		For >2.0, Deduct	*-2.35*	
		For UV Black, Add	*0.94*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.06*	
26 05 29 00-0333	C	4-3/4" Length, 18 Lb. Tensile Strength, Nylon Cable Ties	29.98	
		For Up To 0.1, Add	*23.54*	
		For >0.1 To 0.25, Add	*11.77*	
		For >0.25 To 0.75, Add	*5.89*	
		For >2.0, Deduct	*-2.35*	
		For UV Black, Add	*0.97*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.06*	
26 05 29 00-0334	C	5-1/2" Length, 18 Lb. Tensile Strength, Nylon Cable Ties	30.05	
		For Up To 0.1, Add	*23.54*	
		For >0.1 To 0.25, Add	*11.77*	
		For >0.25 To 0.75, Add	*5.89*	
		For >2.0, Deduct	*-2.35*	
		For UV Black, Add	*0.98*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.06*	
26 05 29 00-0335	C	6-1/2" Length, 18 Lb. Tensile Strength, Nylon Cable Ties	31.14	
		For Up To 0.1, Add	*24.56*	
		For >0.1 To 0.25, Add	*12.28*	
		For >0.25 To 0.75, Add	*6.14*	
		For >2.0, Deduct	*-2.46*	
		For UV Black, Add	*0.99*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.37*	
26 05 29 00-0336	C	8" Length, 18 Lb. Tensile Strength, Nylon Cable Ties	37.37	
		For Up To 0.1, Add	*25.69*	
		For >0.1 To 0.25, Add	*12.85*	
		For >0.25 To 0.75, Add	*6.42*	
		For >2.0, Deduct	*-2.57*	
		For UV Black, Add	*1.75*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.71*	
26 05 29 00-0337	C	4-3/4" Length, 40 Lb. Tensile Strength, Nylon Cable Ties	36.07	
		For Up To 0.1, Add	*23.54*	
		For >0.1 To 0.25, Add	*11.77*	
		For >0.25 To 0.75, Add	*5.89*	
		For >2.0, Deduct	*-2.35*	
		For UV Black, Add	*1.88*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.06*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 29 00-0338	C	6" Length, 40 Lb. Tensile Strength, Nylon Cable Ties	37.18	
		For Up To 0.1, Add	*24.56*	
		For >0.1 To 0.25, Add	*12.28*	
		For >0.25 To 0.75, Add	*6.14*	
		For >2.0, Deduct	*-2.46*	
		For UV Black, Add	*1.89*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.37*	
26 05 29 00-0339	C	8" Length, 40 Lb. Tensile Strength, Nylon Cable Ties	38.38	
		For Up To 0.1, Add	*25.69*	
		For >0.1 To 0.25, Add	*12.85*	
		For >0.25 To 0.75, Add	*6.42*	
		For >2.0, Deduct	*-2.57*	
		For UV Black, Add	*1.90*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.71*	
26 05 29 00-0340	C	10" Length, 40 Lb. Tensile Strength, Nylon Cable Ties	56.95	
		For Up To 0.1, Add	*27.69*	
		For >0.1 To 0.25, Add	*13.85*	
		For >0.25 To 0.75, Add	*6.92*	
		For >2.0, Deduct	*-2.77*	
		For UV Black, Add	*4.39*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.31*	
26 05 29 00-0341	C	11-1/2" Length, 40 Lb. Tensile Strength, Nylon Cable Ties	59.60	
		For Up To 0.1, Add	*27.69*	
		For >0.1 To 0.25, Add	*13.85*	
		For >0.25 To 0.75, Add	*6.92*	
		For >2.0, Deduct	*-2.77*	
		For UV Black, Add	*4.79*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.31*	
26 05 29 00-0342	C	7" Length, 50 Lb. Tensile Strength, Nylon Cable Ties	40.23	
		For Up To 0.1, Add	*25.69*	
		For >0.1 To 0.25, Add	*12.85*	
		For >0.25 To 0.75, Add	*6.42*	
		For >2.0, Deduct	*-2.57*	
		For UV Black, Add	*2.18*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.71*	
26 05 29 00-0343	C	8" Length, 50 Lb. Tensile Strength, Nylon Cable Ties	37.89	
		For Up To 0.1, Add	*25.69*	
		For >0.1 To 0.25, Add	*12.85*	
		For >0.25 To 0.75, Add	*6.42*	
		For >2.0, Deduct	*-2.57*	
		For UV Black, Add	*1.83*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.71*	
26 05 29 00-0344	C	11" Length, 50 Lb. Tensile Strength, Nylon Cable Ties	57.68	
		For Up To 0.1, Add	*27.69*	
		For >0.1 To 0.25, Add	*13.85*	
		For >0.25 To 0.75, Add	*6.92*	
		For >2.0, Deduct	*-2.77*	
		For UV Black, Add	*4.50*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.31*	
26 05 29 00-0345	C	14-1/2" Length, 50 Lb. Tensile Strength, Nylon Cable Ties	66.30	
		For Up To 0.1, Add	*29.43*	
		For >0.1 To 0.25, Add	*14.72*	
		For >0.25 To 0.75, Add	*7.36*	
		For >2.0, Deduct	*-2.94*	
		For UV Black, Add	*5.53*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.83*	
26 05 29 00-0346	C	8" Length, 120 Lb. Tensile Strength, Nylon Cable Ties	65.26	
		For Up To 0.1, Add	*25.69*	
		For >0.1 To 0.25, Add	*12.85*	
		For >0.25 To 0.75, Add	*6.42*	
		For >2.0, Deduct	*-2.57*	
		For UV Black, Add	*5.94*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.71*	
26 05 29 00-0347	C	11" Length, 120 Lb. Tensile Strength, Nylon Cable Ties	71.49	
		For Up To 0.1, Add	*27.69*	
		For >0.1 To 0.25, Add	*13.85*	
		For >0.25 To 0.75, Add	*6.92*	
		For >2.0, Deduct	*-2.77*	
		For UV Black, Add	*6.57*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.31*	
26 05 29 00-0348	C	15" Length, 120 Lb. Tensile Strength, Nylon Cable Ties	87.05	
		For Up To 0.1, Add	*29.43*	
		For >0.1 To 0.25, Add	*14.72*	
		For >0.25 To 0.75, Add	*7.36*	
		For >2.0, Deduct	*-2.94*	
		For UV Black, Add	*8.64*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.83*	
26 05 29 00-0349	C	17" Length, 120 Lb. Tensile Strength, Nylon Cable Ties	125.79	
		For Up To 0.1, Add	*31.39*	
		For >0.1 To 0.25, Add	*15.70*	
		For >0.25 To 0.75, Add	*7.85*	
		For >2.0, Deduct	*-3.14*	
		For UV Black, Add	*14.16*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.42*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 29 00-0350	C	17-3/4" Length, 175 Lb. Tensile Strength, Nylon Cable Ties	121.76	
		For Up To 0.1, Add	*31.39*	
		For >0.1 To 0.25, Add	*15.70*	
		For >0.25 To 0.75, Add	*7.85*	
		For >2.0, Deduct	*-3.14*	
		For UV Black, Add	*13.56*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.42*	
26 05 29 00-0351	C	21-11/16" Length, 175 Lb. Tensile Strength, Nylon Cable Ties	148.97	
		For Up To 0.1, Add	*32.85*	
		For >0.1 To 0.25, Add	*16.43*	
		For >0.25 To 0.75, Add	*8.21*	
		For >2.0, Deduct	*-3.29*	
		For UV Black, Add	*17.42*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.86*	
26 05 29 00-0352	C	30" Length, 175 Lb. Tensile Strength, Nylon Cable Ties	172.86	
		For Up To 0.1, Add	*34.45*	
		For >0.1 To 0.25, Add	*17.23*	
		For >0.25 To 0.75, Add	*8.61*	
		For >2.0, Deduct	*-3.45*	
		For UV Black, Add	*20.76*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.34*	
26 05 29 00-0353	C	46" Length, 175 Lb. Tensile Strength, Nylon Cable Ties	238.28	
		For Up To 0.1, Add	*37.17*	
		For >0.1 To 0.25, Add	*18.59*	
		For >0.25 To 0.75, Add	*9.29*	
		For >2.0, Deduct	*-3.72*	
		For UV Black, Add	*30.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.15*	
26 05 29 00-0354	C	3/4" x 3/4" Self Adhesive Tie Mounts	38.27	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.60*	
26 05 29 00-0355	C	1.1" x 1.1" Tie Mounts With Screw	75.77	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.19*	
26 05 29 00-0356	EA	6" Length x 1/2" Width, Velcro Grip Cable Tie	2.46	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*0.17*	
26 05 29 00-0357	EA	8" Length x 1/2" Width, Velcro Grip Cable Tie	2.48	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*0.14*	
26 05 29 00-0358	EA	12" Length x 1/2" Width, Velcro Grip Cable Tie	3.07	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*0.14*	
26 05 29 00-0359	EA	15" Length x 3/4" Width, Velcro Grip Cable Tie	4.33	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*0.14*	
26 05 29 00-0360	EA	180" Length x 3/4" Width, Velcro Grip Cable Tie Roll Note: Cut to length.	112.51	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1.06*	

26 05 29 00-0361 Fastening Devices For Wireway And Conduit *(26 05 29)*

Note: Includes drilling of holes with power tools in concrete, brick, concrete block, wood, tile or steel and alignment of hangers and supports for bolts.

26 05 29 00-0362 Toggle Bolts *(26 05 29 00-0361)*

Note: Includes machine screw, toggle wing and drilling in concrete, concrete block, wood or steel.

26 05 29 00-0363	EA	1/8" Diameter, 3" Length, Zinc Plated Steel, Toggle Bolt	8.88	
		For >50 To 100, Deduct	*-0.84*	
		For >100 To 250, Deduct	*-1.68*	
		For >250 To 500, Deduct	*-2.93*	
		For >500, Deduct	*-4.18*	
26 05 29 00-0364	EA	1/8" Diameter, 4" Length, Zinc Plated Steel, Toggle Bolt	9.12	
		For >50 To 100, Deduct	*-0.86*	
		For >100 To 250, Deduct	*-1.72*	
		For >250 To 500, Deduct	*-3.01*	
		For >500, Deduct	*-4.29*	
26 05 29 00-0365	EA	3/16" Diameter, 3" Length, Zinc Plated Steel, Toggle Bolt	9.67	
		For >50 To 100, Deduct	*-0.89*	
		For >100 To 250, Deduct	*-1.78*	
		For >250 To 500, Deduct	*-3.10*	
		For >500, Deduct	*-4.43*	
26 05 29 00-0366	EA	3/16" Diameter, 4" Length, Zinc Plated Steel, Toggle Bolt	9.92	
		For >50 To 100, Deduct	*-0.91*	
		For >100 To 250, Deduct	*-1.83*	
		For >250 To 500, Deduct	*-3.18*	
		For >500, Deduct	*-4.54*	
26 05 29 00-0367	EA	1/4" Diameter, 4" Length, Zinc Plated Steel, Toggle Bolt	10.14	
		For >50 To 100, Deduct	*-0.93*	
		For >100 To 250, Deduct	*-1.87*	
		For >250 To 500, Deduct	*-3.25*	
		For >500, Deduct	*-4.64*	
26 05 29 00-0368	EA	5/16" Diameter, 4" Length, Zinc Plated Steel, Toggle Bolt	11.72	
		For >50 To 100, Deduct	*-0.99*	
		For >100 To 250, Deduct	*-1.98*	
		For >250 To 500, Deduct	*-3.43*	
		For >500, Deduct	*-4.88*	
26 05 29 00-0369	EA	3/8" Diameter, 4" Length, Zinc Plated Steel, Toggle Bolt	12.23	
		For >50 To 100, Deduct	*-1.02*	
		For >100 To 250, Deduct	*-2.03*	
		For >250 To 500, Deduct	*-3.52*	
		For >500, Deduct	*-5.02*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 29 00-0370		**Machine Screws** *(26 05 29 00-0361)* Note: Includes drilling in concrete, concrete block, wood or steel.		
26 05 29 00-0371	EA	#8 Diameter, 2" Length, Zinc Plated Steel, Machine Screw	2.61	
		For >50 To 100, Deduct	*-0.25*	
		For >100 To 250, Deduct	*-0.51*	
		For >250 To 500, Deduct	*-0.88*	
		For >500, Deduct	*-1.26*	
26 05 29 00-0372	EA	#10 Diameter, 2" Length, Zinc Plated Steel, Machine Screw	2.66	
		For >50 To 100, Deduct	*-0.25*	
		For >100 To 250, Deduct	*-0.51*	
		For >250 To 500, Deduct	*-0.89*	
		For >500, Deduct	*-1.27*	
26 05 29 00-0373	EA	1/4" Diameter, 2" Length, Zinc Plated Steel, Machine Screw	3.34	
		For >50 To 100, Deduct	*-0.32*	
		For >100 To 250, Deduct	*-0.64*	
		For >250 To 500, Deduct	*-1.11*	
		For >500, Deduct	*-1.59*	
26 05 29 00-0374	EA	5/16" Diameter, 2" Length, Zinc Plated Steel, Machine Screw	3.52	
		For >50 To 100, Deduct	*-0.32*	
		For >100 To 250, Deduct	*-0.65*	
		For >250 To 500, Deduct	*-1.13*	
		For >500, Deduct	*-1.61*	
26 05 29 00-0375	EA	3/8" Diameter, 2" Length, Zinc Plated Steel, Machine Screw	4.37	
		For >50 To 100, Deduct	*-0.39*	
		For >100 To 250, Deduct	*-0.78*	
		For >250 To 500, Deduct	*-1.36*	
		For >500, Deduct	*-1.94*	
26 05 29 00-0376		**Hex Lag Bolts With Lag Shield Expansion Anchors** *(26 05 29 00-0361)* Note: Includes lag bolt, lag shield expansion anchor and drilling in concrete, concrete block, wood or steel.		
26 05 29 00-0377	EA	1/4" Diameter, 2" Length, Zinc Plated Steel, Hex Lag Bolt With Lag Shield Expansion Anchor	4.47	
		For >50 To 100, Deduct	*-0.35*	
		For >100 To 250, Deduct	*-0.69*	
		For >250 To 500, Deduct	*-1.20*	
		For >500, Deduct	*-1.70*	
26 05 29 00-0378	EA	5/16" Diameter, 2" Length, Zinc Plated Steel, Hex Lag Bolt With Lag Shield Expansion Anchor	4.41	
		For >50 To 100, Deduct	*-0.35*	
		For >100 To 250, Deduct	*-0.69*	
		For >250 To 500, Deduct	*-1.19*	
		For >500, Deduct	*-1.70*	
26 05 29 00-0379	EA	3/8" Diameter, 2" Length, Zinc Plated Steel, Hex Lag Bolt With Lag Shield Expansion Anchor	6.40	
		For >50 To 100, Deduct	*-0.44*	
		For >100 To 250, Deduct	*-0.88*	
		For >250 To 500, Deduct	*-1.51*	
		For >500, Deduct	*-2.14*	
26 05 29 00-0380	EA	1/2" Diameter, 2" Length, Zinc Plated Steel, Hex Lag Bolt With Lag Shield Expansion Anchor	8.26	
		For >50 To 100, Deduct	*-0.53*	
		For >100 To 250, Deduct	*-1.07*	
		For >250 To 500, Deduct	*-1.82*	
		For >500, Deduct	*-2.57*	
26 05 29 00-0381		**Hanger Lag Bolts With Hex Nuts** *(26 05 29 00-0361)* Note: Includes hanger lag bolt (threaded one side), hex nut and drilling in concrete, concrete block, wood or steel.		
26 05 29 00-0382	EA	1/4" Diameter, 2" Length, Zinc Plated Steel, Hanger Lag Bolt With Hex Nut	3.31	
		For >50 To 100, Deduct	*-0.27*	
		For >100 To 250, Deduct	*-0.54*	
		For >250 To 500, Deduct	*-0.94*	
		For >500, Deduct	*-1.33*	
26 05 29 00-0383	EA	5/16" Diameter, 2" Length, Zinc Plated Steel, Hanger Lag Bolt With Hex Nut	3.37	
		For >50 To 100, Deduct	*-0.27*	
		For >100 To 250, Deduct	*-0.54*	
		For >250 To 500, Deduct	*-0.94*	
		For >500, Deduct	*-1.34*	
26 05 29 00-0384	EA	3/8" Diameter, 2-1/2" Length, Zinc Plated Steel, Hanger Lag Bolt With Hex Nut	4.03	
		For >50 To 100, Deduct	*-0.31*	
		For >100 To 250, Deduct	*-0.62*	
		For >250 To 500, Deduct	*-1.07*	
		For >500, Deduct	*-1.52*	
26 05 29 00-0385		**Hollow Wall Screw Anchors** *(26 05 29 00-0361)*		
26 05 29 00-0386	EA	6-32 Screw Size, 5/16" Hole Diameter, 1/8" To 5/8" Grip Range, Zinc Plated Steel, Hollow Wall Screw Anchor	1.94	
		For >50 To 100, Deduct	*-0.16*	
		For >100 To 250, Deduct	*-0.32*	
		For >250 To 500, Deduct	*-0.56*	
		For >500, Deduct	*-0.79*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 29 00-0387	EA	6-32 Screw Size, 5/16" Hole Diameter, 5/8" To 1-1/4" Grip Range, Zinc Plated Steel, Hollow Wall Screw Anchor	2.01	
		For >50 To 100, Deduct	*-0.16*	
		For >100 To 250, Deduct	*-0.33*	
		For >250 To 500, Deduct	*-0.56*	
		For >500, Deduct	*-0.80*	
26 05 29 00-0388	EA	6-32 Screw Size, 5/16" Hole Diameter, 1-1/4" To 1-3/4" Grip Range, Zinc Plated Steel, Hollow Wall Screw Anchor	2.12	
		For >50 To 100, Deduct	*-0.17*	
		For >100 To 250, Deduct	*-0.33*	
		For >250 To 500, Deduct	*-0.57*	
		For >500, Deduct	*-0.81*	
26 05 29 00-0389	EA	10-24 Screw Size, 3/8" Hole Diameter, 1/8" To 5/8" Grip Range, Zinc Plated Steel, Hollow Wall Screw Anchor	2.72	
		For >50 To 100, Deduct	*-0.20*	
		For >100 To 250, Deduct	*-0.40*	
		For >250 To 500, Deduct	*-0.68*	
		For >500, Deduct	*-0.97*	
26 05 29 00-0390	EA	10-24 Screw Size, 3/8" Hole Diameter, 5/8" To 1-1/4" Grip Range, Zinc Plated Steel, Hollow Wall Screw Anchor	2.87	
		For >50 To 100, Deduct	*-0.20*	
		For >100 To 250, Deduct	*-0.40*	
		For >250 To 500, Deduct	*-0.69*	
		For >500, Deduct	*-0.98*	
26 05 29 00-0391	EA	10-24 Screw Size, 3/8" Hole Diameter, 1-1/4" To 1-3/4" Grip Range, Zinc Plated Steel, Hollow Wall Screw Anchor	2.92	
		For >50 To 100, Deduct	*-0.20*	
		For >100 To 250, Deduct	*-0.41*	
		For >250 To 500, Deduct	*-0.70*	
		For >500, Deduct	*-0.99*	
26 05 29 00-0392	EA	1/4-20 Screw Size, 7/16" Hole Diameter, 1/8" To 5/8" Grip Range, Zinc Plated Steel, Hollow Wall Screw Anchor	2.95	
		For >50 To 100, Deduct	*-0.20*	
		For >100 To 250, Deduct	*-0.41*	
		For >250 To 500, Deduct	*-0.70*	
		For >500, Deduct	*-0.99*	
26 05 29 00-0393	EA	1/4-20 Screw Size, 7/16" Hole Diameter, 5/8" To 1-1/4" Grip Range, Zinc Plated Steel, Hollow Wall Screw Anchor	3.17	
		For >50 To 100, Deduct	*-0.21*	
		For >100 To 250, Deduct	*-0.42*	
		For >250 To 500, Deduct	*-0.72*	
		For >500, Deduct	*-1.01*	
26 05 29 00-0394	EA	1/4-20 Screw Size, 7/16" Hole Diameter, 1-1/4" To 1-3/4" Grip Range, Zinc Plated Steel, Hollow Wall Screw Anchor	3.25	
		For >50 To 100, Deduct	*-0.21*	
		For >100 To 250, Deduct	*-0.42*	
		For >250 To 500, Deduct	*-0.72*	
		For >500, Deduct	*-1.02*	

26 05 29 00-0395 Lead Screw Anchors *(26 05 29 00-0361)*

Note: Includes screw.

26 05 29 00-0396	EA	#6-8 Screw Size, 1/4" Hole Diameter, Lead Screw Anchor With Screw	4.42	
		For >50 To 100, Deduct	*-0.40*	
		For >100 To 250, Deduct	*-0.80*	
		For >250 To 500, Deduct	*-1.39*	
		For >500, Deduct	*-1.98*	
26 05 29 00-0397	EA	#10-14 Screw Size, 5/16" Hole Diameter, Lead Screw Anchor With Screw	5.29	
		For >50 To 100, Deduct	*-0.47*	
		For >100 To 250, Deduct	*-0.93*	
		For >250 To 500, Deduct	*-1.62*	
		For >500, Deduct	*-2.31*	
26 05 29 00-0398	EA	#16-18 Screw Size, 5/16" Hole Diameter, Lead Screw Anchor With Screw	7.24	
		For >50 To 100, Deduct	*-0.60*	
		For >100 To 250, Deduct	*-1.21*	
		For >250 To 500, Deduct	*-2.10*	
		For >500, Deduct	*-2.98*	

26 05 29 00-0399 Acoustical T-Bar Clips *(26 05 29 00-0361)*

Note: For conduit installation above suspended ceilings up to 15' height.

26 05 29 00-0400	EA	1/2" Conduit, Push-In Acoustical T-Bar Clip	8.21	
		For >50 To 100, Deduct	*-0.57*	
		For >100 To 250, Deduct	*-1.13*	
		For >250 To 500, Deduct	*-1.94*	
		For >500, Deduct	*-2.74*	
26 05 29 00-0401	EA	3/4" Conduit, Push-In Acoustical T-Bar Clip	8.60	
		For >50 To 100, Deduct	*-0.59*	
		For >100 To 250, Deduct	*-1.19*	
		For >250 To 500, Deduct	*-2.03*	
		For >500, Deduct	*-2.88*	
26 05 29 00-0402	EA	1" Conduit, Push-In Acoustical T-Bar Clip	9.45	
		For >50 To 100, Deduct	*-0.64*	
		For >100 To 250, Deduct	*-1.27*	
		For >250 To 500, Deduct	*-2.17*	
		For >500, Deduct	*-3.08*	

26 05 29 00-0403 Threaded Rod, Accessories And Attachments *(26 05 29)*

26 05 29 00-0404 Threaded Rod And Rod Accessories *(26 05 29 00-0403)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 29 00-0405		**Carbon Steel Threaded Rod** *(26 05 29 00-0404)*		
		Note: Includes plain finish.		
26 05 29 00-0406	LF	3/8" Diameter, Plain Finish Steel, Low Carbon Threaded Rod	3.16	0.71
		For Galvanized, Add	*0.70*	
		For Zinc Coated, Add	*0.50*	
26 05 29 00-0407	LF	1/2" Diameter, Plain Finish Steel, Low Carbon Threaded Rod	4.28	0.75
		For Galvanized, Add	*1.11*	
		For Zinc Coated, Add	*0.79*	
26 05 29 00-0408	LF	5/8" Diameter, Plain Finish Steel, Low Carbon Threaded Rod	5.86	0.78
		For Galvanized, Add	*1.72*	
		For Zinc Coated, Add	*1.23*	
26 05 29 00-0409	LF	3/4" Diameter, Plain Finish Steel, Low Carbon Threaded Rod	9.42	0.80
		For Galvanized, Add	*3.12*	
		For Zinc Coated, Add	*2.23*	
26 05 29 00-0410	LF	7/8" Diameter, Plain Finish Steel, Low Carbon Threaded Rod	10.24	0.83
		For Galvanized, Add	*3.43*	
		For Zinc Coated, Add	*2.45*	
26 05 29 00-0411	LF	1" Diameter, Plain Finish Steel, Low Carbon Threaded Rod	13.93	0.93
		For Galvanized, Add	*4.82*	
		For Zinc Coated, Add	*3.43*	
26 05 29 00-0412	LF	1-1/8" Diameter, Plain Finish Steel, Low Carbon Threaded Rod	17.28	1.04
		For Galvanized, Add	*6.08*	
		For Zinc Coated, Add	*4.33*	
26 05 29 00-0413		**Threaded Rod Couplings** *(26 05 29 00-0404)*		
26 05 29 00-0414	EA	3/8" Diameter, Threaded Rod Coupling Nut	9.39	
26 05 29 00-0415	EA	1/2" Diameter, Threaded Rod Coupling Nut	10.69	
26 05 29 00-0416	EA	5/8" Diameter, Threaded Rod Coupling Nut	13.55	
26 05 29 00-0417	EA	3/4" Diameter, Threaded Rod Coupling Nut	16.74	
26 05 29 00-0418	EA	7/8" Diameter, Threaded Rod Coupling Nut	25.23	
26 05 29 00-0419	EA	1" Diameter, Threaded Rod Coupling Nut	29.95	
26 05 29 00-0420	EA	1-1/8" Diameter, Threaded Rod Coupling Nut	59.21	
26 05 29 00-0421		**Flat Washers** *(26 05 29 00-0404)*		
26 05 29 00-0422	EA	3/8" Inside Diameter, Zinc Plated Steel, Low Carbon Flat Washer	0.80	0.28
		For Galvanized, Add	*0.04*	
26 05 29 00-0423	EA	1/2" Inside Diameter, Zinc Plated Steel, Low Carbon Flat Washer	1.05	0.28
		For Galvanized, Add	*0.09*	
26 05 29 00-0424	EA	5/8" Inside Diameter, Zinc Plated Steel, Low Carbon Flat Washer	1.42	0.28
		For Galvanized, Add	*0.17*	
26 05 29 00-0425	EA	3/4" Inside Diameter, Zinc Plated Steel, Low Carbon Flat Washer	1.76	0.56
		For Galvanized, Add	*0.25*	
26 05 29 00-0426	EA	7/8" Inside Diameter, Zinc Plated Steel, Low Carbon Flat Washer	2.00	0.56
		For Galvanized, Add	*0.29*	
26 05 29 00-0427	EA	1" Inside Diameter, Zinc Plated Steel, Low Carbon Flat Washer	2.37	0.56
		For Galvanized, Add	*0.36*	
26 05 29 00-0428	EA	1-1/8" Inside Diameter, Zinc Plated Steel, Low Carbon Flat Washer	2.66	0.56
		For Galvanized, Add	*0.41*	
26 05 29 00-0429		**Malleable Iron Eye Sockets** *(26 05 29 00-0404)*		
		Note: Type 16.		
26 05 29 00-0430	EA	3/8" Rod Size, Malleable Iron Eye Socket	15.43	
26 05 29 00-0431	EA	1/2" Rod Size, Malleable Iron Eye Socket	18.75	
26 05 29 00-0432	EA	5/8" Rod Size, Malleable Iron Eye Socket	34.58	
26 05 29 00-0433	EA	3/4" Rod Size, Malleable Iron Eye Socket	50.32	
26 05 29 00-0434	EA	7/8" Rod Size, Malleable Iron Eye Socket	53.39	
26 05 29 00-0435		**Hex Nuts** *(26 05 29 00-0404)*		
26 05 29 00-0436	EA	3/8" Diameter, Zinc Plated Steel, Low Carbon/Grade 2 Hex Nut	0.78	0.28
		For Galvanized, Add	*0.04*	
26 05 29 00-0437	EA	1/2" Diameter, Zinc Plated Steel, Low Carbon/Grade 2 Hex Nut	1.00	0.28
		For Galvanized, Add	*0.08*	
26 05 29 00-0438	EA	5/8" Diameter, Zinc Plated Steel, Low Carbon/Grade 2 Hex Nut	1.42	0.28
		For Galvanized, Add	*0.17*	
26 05 29 00-0439	EA	3/4" Diameter, Zinc Plated Steel, Low Carbon/Grade 2 Hex Nut	1.70	0.56
		For Galvanized, Add	*0.23*	
26 05 29 00-0440	EA	7/8" Diameter, Zinc Plated Steel, Low Carbon/Grade 2 Hex Nut	2.56	0.56
		For Galvanized, Add	*0.43*	
26 05 29 00-0441	EA	1" Diameter, Zinc Plated Steel, Low Carbon/Grade 2 Hex Nut	3.28	0.56
		For Galvanized, Add	*0.59*	
26 05 29 00-0442	EA	1-1/8" Diameter, Zinc Plated Steel, Low Carbon/Grade 2 Hex Nut	5.47	0.56
		For Galvanized, Add	*1.11*	
26 05 29 00-0443		**Forged Steel Turnbuckles** *(26 05 29 00-0404)*		
		Note: Type 13.		
26 05 29 00-0444	EA	3/8" Thread Diameter, Forged Steel Turnbuckle Body	36.42	
26 05 29 00-0445	EA	1/2" Thread Diameter, Forged Steel Turnbuckle Body	45.92	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 29 00-0446	EA	5/8" Thread Diameter, Forged Steel Turnbuckle Body	63.29	
26 05 29 00-0447	EA	3/4" Thread Diameter, Forged Steel Turnbuckle Body	79.20	
26 05 29 00-0448	EA	7/8" Thread Diameter, Forged Steel Turnbuckle Body	208.84	
26 05 29 00-0449	EA	1" Thread Diameter, Forged Steel Turnbuckle Body	132.31	
26 05 29 00-0450	EA	1-1/4" Thread Diameter, Forged Steel Turnbuckle Body	277.45	
26 05 29 00-0451		Attachments *(26 05 29 00-0403)*		
26 05 29 00-0452		Welded Beam Attachments *(26 05 29 00-0451)*		
		Note: Type 22.		
26 05 29 00-0453	EA	3/8" Rod Size, Welded Beam Attachment	65.67	11.28
26 05 29 00-0454	EA	1/2" Rod Size, Welded Beam Attachment	70.24	11.85
26 05 29 00-0455	EA	5/8" Rod Size, Welded Beam Attachment	74.90	12.52
26 05 29 00-0456	EA	3/4" Rod Size, Welded Beam Attachment	98.72	13.31
26 05 29 00-0457	EA	7/8" Rod Size, Welded Beam Attachment	120.56	14.10
26 05 29 00-0458	EA	1" Rod Size, Welded Beam Attachment	173.24	16.13
26 05 29 00-0459	EA	1-1/8" Rod Size, Welded Beam Attachment	252.17	16.92
26 05 29 00-0460		C-Clamp Style Beam Clamps *(26 05 29 00-0451)*		
		Note: Type 23. Top or bottom flange mount.		
26 05 29 00-0461	EA	3/8" Rod Size, C-Clamp Style Beam Clamp	19.40	8.48
26 05 29 00-0462	EA	1/2" Rod Size, C-Clamp Style Beam Clamp	24.19	9.04
26 05 29 00-0463	EA	5/8" Rod Size, C-Clamp Style Beam Clamp	28.02	9.68
26 05 29 00-0464	EA	3/4" Rod Size, C-Clamp Style Beam Clamp	37.97	10.43
26 05 29 00-0465	EA	7/8" Rod Size, C-Clamp Style Beam Clamp	58.83	11.30
26 05 29 00-0466		Bottom Mount I-Beam Clamps *(26 05 29 00-0451)*		
		Note: Type 21. For attaching threaded rod centered under beam flanges.		
26 05 29 00-0467	EA	3/8" Rod Size, Up To 6" Flange Width, Bottom Mount I-Beam Clamp	65.12	11.30
26 05 29 00-0468	EA	1/2" Rod Size, Up To 6" Flange Width, Bottom Mount I-Beam Clamp	99.85	12.33
26 05 29 00-0469	EA	5/8" Rod Size, Up To 6" Flange Width, Bottom Mount I-Beam Clamp	146.61	13.56
26 05 29 00-0470	EA	3/4" Rod Size, Up To 6" Flange Width, Bottom Mount I-Beam Clamp	176.60	15.06
26 05 29 00-0471	EA	1" Rod Size, Up To 6" Flange Width, Bottom Mount I-Beam Clamp	446.56	16.95
26 05 29 00-0472		Steel U-Bolts *(26 05 29 00-0451)*		
		Note: Type 24. Includes plate and nuts.		
26 05 29 00-0473	EA	1/2" Pipe Size, Zinc Plated Steel, U-Bolt	15.93	6.78
26 05 29 00-0474	EA	3/4" Pipe Size, Zinc Plated Steel, U-Bolt	17.51	7.14
26 05 29 00-0475	EA	1" Pipe Size, Zinc Plated Steel, U-Bolt	18.97	7.53
26 05 29 00-0476	EA	1-1/4" Pipe Size, Zinc Plated Steel, U-Bolt	22.15	7.97
26 05 29 00-0477	EA	1-1/2" Pipe Size, Zinc Plated Steel, U-Bolt	22.65	8.48
26 05 29 00-0478	EA	2" Pipe Size, Zinc Plated Steel, U-Bolt	24.26	9.04
26 05 29 00-0479	EA	2-1/2" Pipe Size, Zinc Plated Steel, U-Bolt	38.19	9.69
26 05 29 00-0480	EA	3" Pipe Size, Zinc Plated Steel, U-Bolt	42.33	10.43
26 05 29 00-0481	EA	4" Pipe Size, Zinc Plated Steel, U-Bolt	52.41	11.30
26 05 29 00-0482		Stainless Steel Threaded Rod *(26 05 29 00-0403)*		
26 05 29 00-0483	LF	1/4" Diameter, 304/18-8 Stainless Steel Threaded Rod	4.05	0.56
		For 316 Stainless Steel, Add	*1.18*	
26 05 29 00-0484	LF	5/16" Diameter, 304/18-8 Stainless Steel Threaded Rod	6.24	0.62
		For 316 Stainless Steel, Add	*2.02*	
26 05 29 00-0485	LF	3/8" Diameter, 304/18-8 Stainless Steel Threaded Rod	8.07	0.71
		For 316 Stainless Steel, Add	*2.69*	
26 05 29 00-0486	LF	7/16" Diameter, 304/18-8 Stainless Steel Threaded Rod	11.36	0.73
		For 316 Stainless Steel, Add	*4.01*	
26 05 29 00-0487	LF	1/2" Diameter, 304/18-8 Stainless Steel Threaded Rod	13.70	0.75
		For 316 Stainless Steel, Add	*4.94*	
26 05 29 00-0488	LF	5/8" Diameter, 304/18-8 Stainless Steel Threaded Rod	20.74	0.76
		For 316 Stainless Steel, Add	*7.78*	
26 05 29 00-0489	LF	3/4" Diameter, 304/18-8 Stainless Steel Threaded Rod	29.21	0.78
		For 316 Stainless Steel, Add	*11.20*	
26 05 29 00-0490	LF	7/8" Diameter, 304/18-8 Stainless Steel Threaded Rod	40.36	0.80
		For 316 Stainless Steel, Add	*15.69*	
26 05 29 00-0491	LF	1" Diameter, 304/18-8 Stainless Steel Threaded Rod	51.92	0.93
		For 316 Stainless Steel, Add	*20.26*	
26 05 29 00-0492	LF	1-1/4" Diameter, 304/18-8 Stainless Steel Threaded Rod	110.36	1.13
		For 316 Stainless Steel, Add	*43.74*	
26 05 29 00-0493		Polyvinyl Chloride (PVC) Coated Supports *(26 05 29)*		
		Note: Includes stainless steel and/or Polyvinyl Chloride (PVC) coated hardware.		
26 05 29 00-0494		Polyvinyl Chloride (PVC) Coated Beam Clamps *(26 05 29 00-0493)*		
26 05 29 00-0495		Right Angle, Polyvinyl Chloride (PVC) Coated Beam Clamps *(26 05 29 00-0494)*		
26 05 29 00-0496	EA	1/2", Right Angle, Polyvinyl Chloride (PVC) Coated Beam Clamp	62.03	22.56
26 05 29 00-0497	EA	3/4", Right Angle, Polyvinyl Chloride (PVC) Coated Beam Clamp	67.40	24.59
26 05 29 00-0498	EA	1", Right Angle, Polyvinyl Chloride (PVC) Coated Beam Clamp	71.82	27.07

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 29 00-0499	EA	1-1/4", Right Angle, Polyvinyl Chloride (PVC) Coated Beam Clamp	86.43	30.12
26 05 29 00-0500	EA	1-1/2", Right Angle, Polyvinyl Chloride (PVC) Coated Beam Clamp	99.96	33.84
26 05 29 00-0501	EA	2", Right Angle, Polyvinyl Chloride (PVC) Coated Beam Clamp	119.94	37.23
26 05 29 00-0502	EA	2-1/2", Right Angle, Polyvinyl Chloride (PVC) Coated Beam Clamp	131.18	40.61
26 05 29 00-0503	EA	3", Right Angle, Polyvinyl Chloride (PVC) Coated Beam Clamp	144.54	43.99
26 05 29 00-0504	EA	3-1/2", Right Angle, Polyvinyl Chloride (PVC) Coated Beam Clamp	152.55	47.37
26 05 29 00-0505	EA	4", Right Angle, Polyvinyl Chloride (PVC) Coated Beam Clamp	164.93	50.76
26 05 29 00-0506		Parallel, Polyvinyl Chloride (PVC) Coated Beam Clamps *(26 05 29 00-0494)*		
26 05 29 00-0507	EA	1/2", Parallel, Polyvinyl Chloride (PVC) Coated Beam Clamp	66.75	22.56
26 05 29 00-0508	EA	3/4", Parallel, Polyvinyl Chloride (PVC) Coated Beam Clamp	70.60	24.59
26 05 29 00-0509	EA	1", Parallel, Polyvinyl Chloride (PVC) Coated Beam Clamp	81.39	27.07
26 05 29 00-0510	EA	1-1/4", Parallel, Polyvinyl Chloride (PVC) Coated Beam Clamp	89.83	30.12
26 05 29 00-0511	EA	1-1/2", Parallel, Polyvinyl Chloride (PVC) Coated Beam Clamp	101.27	33.84
26 05 29 00-0512	EA	2", Parallel, Polyvinyl Chloride (PVC) Coated Beam Clamp	117.69	37.23
26 05 29 00-0513	EA	2-1/2", Parallel, Polyvinyl Chloride (PVC) Coated Beam Clamp	135.44	40.61
26 05 29 00-0514	EA	3", Parallel, Polyvinyl Chloride (PVC) Coated Beam Clamp	150.20	43.99
26 05 29 00-0515	EA	3-1/2", Parallel, Polyvinyl Chloride (PVC) Coated Beam Clamp	159.65	47.37
26 05 29 00-0516	EA	4", Parallel, Polyvinyl Chloride (PVC) Coated Beam Clamp	165.88	50.76
26 05 29 00-0517		Edge, Polyvinyl Chloride (PVC) Coated Beam Clamps *(26 05 29 00-0494)*		
26 05 29 00-0518	EA	1/2", Edge, Polyvinyl Chloride (PVC) Coated Beam Clamp	62.93	22.33
26 05 29 00-0519	EA	3/4", Edge, Polyvinyl Chloride (PVC) Coated Beam Clamp	67.63	24.37
26 05 29 00-0520	EA	1", Edge, Polyvinyl Chloride (PVC) Coated Beam Clamp	76.63	27.07
26 05 29 00-0521	EA	1-1/4", Edge, Polyvinyl Chloride (PVC) Coated Beam Clamp	90.12	29.78
26 05 29 00-0522	EA	1-1/2", Edge, Polyvinyl Chloride (PVC) Coated Beam Clamp	117.99	33.84
26 05 29 00-0523	EA	2", Edge, Polyvinyl Chloride (PVC) Coated Beam Clamp	129.35	37.23
26 05 29 00-0524		Polyvinyl Chloride (PVC) Coated Conduit Straps *(26 05 29 00-0493)*		
26 05 29 00-0525		One Hole, Polyvinyl Chloride (PVC) Coated Steel Conduit Straps *(26 05 29 00-0524)*		
26 05 29 00-0526	EA	1/2", One Hole, Polyvinyl Chloride (PVC) Coated Steel Conduit Strap	7.84	0.68
26 05 29 00-0527	EA	3/4", One Hole, Polyvinyl Chloride (PVC) Coated Steel Conduit Strap	8.53	0.68
26 05 29 00-0528	EA	1", One Hole, Polyvinyl Chloride (PVC) Coated Steel Conduit Strap	12.56	0.68
26 05 29 00-0529	EA	1-1/4", One Hole, Polyvinyl Chloride (PVC) Coated Steel Conduit Strap	15.29	0.68
26 05 29 00-0530	EA	1-1/2", One Hole, Polyvinyl Chloride (PVC) Coated Steel Conduit Strap	20.14	0.68
26 05 29 00-0531	EA	2", One Hole, Polyvinyl Chloride (PVC) Coated Steel Conduit Strap	30.28	0.68
26 05 29 00-0532	EA	2-1/2", One Hole, Polyvinyl Chloride (PVC) Coated Steel Conduit Strap	40.35	0.68
26 05 29 00-0533	EA	3", One Hole, Polyvinyl Chloride (PVC) Coated Steel Conduit Strap	54.08	0.68
26 05 29 00-0534	EA	3-1/2", One Hole, Polyvinyl Chloride (PVC) Coated Steel Conduit Strap	95.75	0.68
26 05 29 00-0535	EA	4", One Hole, Polyvinyl Chloride (PVC) Coated Steel Conduit Strap	101.76	0.68
26 05 29 00-0536		Two Hole, Polyvinyl Chloride (PVC) Coated Steel Conduit Straps *(26 05 29 00-0524)*		
26 05 29 00-0537	EA	1/2", Two Hole, Polyvinyl Chloride (PVC) Coated Steel Conduit Strap	15.46	1.35
26 05 29 00-0538	EA	3/4", Two Hole, Polyvinyl Chloride (PVC) Coated Steel Conduit Strap	15.53	1.35
26 05 29 00-0539	EA	1", Two Hole, Polyvinyl Chloride (PVC) Coated Steel Conduit Strap	15.94	1.35
26 05 29 00-0540	EA	1-1/4", Two Hole, Polyvinyl Chloride (PVC) Coated Steel Conduit Strap	20.09	1.35
26 05 29 00-0541	EA	1-1/2", Two Hole, Polyvinyl Chloride (PVC) Coated Steel Conduit Strap	20.66	1.35
26 05 29 00-0542	EA	2", Two Hole, Polyvinyl Chloride (PVC) Coated Steel Conduit Strap	23.72	1.35
26 05 29 00-0543	EA	2-1/2", Two Hole, Polyvinyl Chloride (PVC) Coated Steel Conduit Strap	26.69	1.35
26 05 29 00-0544	EA	3", Two Hole, Polyvinyl Chloride (PVC) Coated Steel Conduit Strap	27.92	1.35
26 05 29 00-0545	EA	3-1/2", Two Hole, Polyvinyl Chloride (PVC) Coated Steel Conduit Strap	29.82	1.35
26 05 29 00-0546	EA	4", Two Hole, Polyvinyl Chloride (PVC) Coated Steel Conduit Strap	32.36	1.35
26 05 29 00-0547		Polyvinyl Chloride (PVC) Coated Clamp Back Spacer *(26 05 29 00-0493)*		
26 05 29 00-0548		Polyvinyl Chloride (PVC) Coated Clamp Back Spacer *(26 05 29 00-0547)*		
26 05 29 00-0549	EA	1/2" Polyvinyl Chloride (PVC) Coated Clamp Back Spacer	14.01	1.35
26 05 29 00-0550	EA	3/4" Polyvinyl Chloride (PVC) Coated Clamp Back Spacer	16.32	1.35
26 05 29 00-0551	EA	1" Polyvinyl Chloride (PVC) Coated Clamp Back Spacer	20.57	1.35
26 05 29 00-0552	EA	1-1/4" Polyvinyl Chloride (PVC) Coated Clamp Back Spacer	24.08	1.35
26 05 29 00-0553	EA	1-1/2" Polyvinyl Chloride (PVC) Coated Clamp Back Spacer	32.30	1.35
26 05 29 00-0554	EA	2" Polyvinyl Chloride (PVC) Coated Clamp Back Spacer	62.66	1.35
26 05 29 00-0555	EA	2-1/2" Polyvinyl Chloride (PVC) Coated Clamp Back Spacer	79.53	1.35
26 05 29 00-0556	EA	3" Polyvinyl Chloride (PVC) Coated Clamp Back Spacer	108.65	1.35
26 05 29 00-0557	EA	3-1/2" Polyvinyl Chloride (PVC) Coated Clamp Back Spacer	190.30	1.35
26 05 29 00-0558	EA	4" Polyvinyl Chloride (PVC) Coated Clamp Back Spacer	190.30	1.35
26 05 29 00-0559		Polyvinyl Chloride (PVC) Coated Threaded Rod And Accessories *(26 05 29 00-0493)*		
26 05 29 00-0560		Polyvinyl Chloride (PVC) Coated Threaded Rod *(26 05 29 00-0559)*		
26 05 29 00-0561	LF	3/8" Diameter, Polyvinyl Chloride (PVC) Coated Threaded Rod	9.68	0.90
26 05 29 00-0562	LF	1/2" Diameter, Polyvinyl Chloride (PVC) Coated Threaded Rod	11.92	1.01

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 29 00-0563		**Attachments** *(26 05 29 00-0493)*		
26 05 29 00-0564		**Polyvinyl Chloride (PVC) Coated U-Bolts And Encapsulation Nuts** *(26 05 29 00-0563)*		
26 05 29 00-0565	EA	1/2" Polyvinyl Chloride (PVC) Coated U-Bolt And Encapsulated Nuts	18.29	6.78
26 05 29 00-0566	EA	3/4" Polyvinyl Chloride (PVC) Coated U-Bolt And Encapsulated Nuts	18.89	7.12
26 05 29 00-0567	EA	1" Polyvinyl Chloride (PVC) Coated U-Bolt And Encapsulated Nuts	19.88	7.57
26 05 29 00-0568	EA	1-1/4" Polyvinyl Chloride (PVC) Coated U-Bolt And Encapsulated Nuts	21.16	8.02
26 05 29 00-0569	EA	1-1/2" Polyvinyl Chloride (PVC) Coated U-Bolt And Encapsulated Nuts	22.55	8.48
26 05 29 00-0570	EA	2" Polyvinyl Chloride (PVC) Coated U-Bolt And Encapsulated Nuts	25.38	9.04
26 05 29 00-0571	EA	2-1/2" Polyvinyl Chloride (PVC) Coated U-Bolt And Encapsulated Nuts	37.00	9.72
26 05 29 00-0572	EA	3" Polyvinyl Chloride (PVC) Coated U-Bolt And Encapsulated Nuts	38.77	10.39
26 05 29 00-0573	EA	4" Polyvinyl Chloride (PVC) Coated U-Bolt And Encapsulated Nuts	41.32	11.30
26 05 29 00-0574	EA	5" Polyvinyl Chloride (PVC) Coated U-Bolt And Encapsulated Nuts	67.98	12.88
26 05 29 00-0575	EA	6" Polyvinyl Chloride (PVC) Coated U-Bolt And Encapsulated Nuts	84.35	14.91
26 05 29 00-0576		**Polyvinyl Chloride (PVC) Coated Hanger Rod Beam Clamps** *(26 05 29 00-0563)*		
26 05 29 00-0577	EA	1/4", 20 Hole, 15/16" Jaw, Polyvinyl Chloride (PVC) Coated Hanger Rod Beam Clamp	63.64	22.33
26 05 29 00-0578	EA	5/16", 18 Hole, 7/8" Jaw, Polyvinyl Chloride (PVC) Coated Hanger Rod Beam Clamp	74.87	22.33
26 05 29 00-0579	EA	3/8", 16 Hole, 1" Jaw, Polyvinyl Chloride (PVC) Coated Hanger Rod Beam Clamp	79.49	22.33
26 05 29 00-0580	EA	1/2", 13 Hole, 1" Jaw, Polyvinyl Chloride (PVC) Coated Hanger Rod Beam Clamp	87.80	23.69
26 05 29 00-0581	EA	1/2", 13 Hole, 2-1/8" Jaw, Polyvinyl Chloride (PVC) Coated Hanger Rod Beam Clamp	102.88	27.07
26 05 29 00-0582		**Polyvinyl Chloride (PVC) Coated Pipe Straps** *(26 05 29 00-0563)* Note: Includes stainless steel nuts and bolts.		
26 05 29 00-0583	EA	1/2" Polyvinyl Chloride (PVC) Coated Pipe Strap	24.51	7.45
26 05 29 00-0584	EA	3/4" Polyvinyl Chloride (PVC) Coated Pipe Strap	25.66	8.12
26 05 29 00-0585	EA	1" Polyvinyl Chloride (PVC) Coated Pipe Strap	27.98	8.80
26 05 29 00-0586	EA	1-1/4" Polyvinyl Chloride (PVC) Coated Pipe Strap	31.40	10.15
26 05 29 00-0587	EA	1-1/2" Polyvinyl Chloride (PVC) Coated Pipe Strap	35.98	11.51
26 05 29 00-0588	EA	2" Polyvinyl Chloride (PVC) Coated Pipe Strap	40.25	12.18
26 05 29 00-0589	EA	2-1/2" Polyvinyl Chloride (PVC) Coated Pipe Strap	44.44	13.53
26 05 29 00-0590	EA	3" Polyvinyl Chloride (PVC) Coated Pipe Strap	53.32	14.89
26 05 29 00-0591	EA	3-1/2" Polyvinyl Chloride (PVC) Coated Pipe Strap	58.56	15.57
26 05 29 00-0592	EA	4" Polyvinyl Chloride (PVC) Coated Pipe Strap	61.32	16.92
26 05 29 00-0593	EA	5" Polyvinyl Chloride (PVC) Coated Pipe Strap	65.20	18.96
26 05 29 00-0594		**Polyvinyl Chloride (PVC) Coated Channel** *(26 05 29 00-0493)*		
26 05 29 00-0595	LF	A12, Polyvinyl Chloride (PVC) Coated Channel	27.03	3.39
26 05 29 00-0596	LF	A12A, Polyvinyl Chloride (PVC) Coated Channel	48.33	4.74
26 05 29 00-0597	LF	A12P, Polyvinyl Chloride (PVC) Coated Channel	28.95	3.39
26 05 29 00-0598	LF	C14, Polyvinyl Chloride (PVC) Coated Channel	21.14	3.39
26 05 29 00-0599	LF	C14P, Polyvinyl Chloride (PVC) Coated Channel	22.33	3.39
26 05 29 00-0600		**Polymer Concrete Pads** *(26 05 29)* Note: Excludes excavation and backfill.		
26 05 29 00-0601		**Polymer Concrete, Box Pads** *(26 05 29 00-0600)*		
26 05 29 00-0602	EA	24" x 36", 18" Depth, Polymer Concrete, Box Pad	1,458.74	137.49
26 05 29 00-0603	EA	25" x 25", 24" Depth, Polymer Concrete, Box Pad	1,507.66	137.49
26 05 29 00-0604	EA	40" x 44", 15" Depth, Polymer Concrete, Box Pad	1,957.14	137.49
26 05 29 00-0605	EA	40" x 44", 24" Depth, Polymer Concrete, Box Pad	2,031.67	137.49
26 05 29 00-0606	EA	52" x 36", 18" Depth, Polymer Concrete, Box Pad	1,887.77	137.49
26 05 29 00-0607	EA	44" x 44", 32" Depth, Polymer Concrete, Box Pad	2,239.71	137.49
26 05 29 00-0608	EA	40" x 58", 24" Depth, Polymer Concrete, Box Pad	2,509.58	137.49
26 05 29 00-0609	EA	52" x 50", 18" Depth, Polymer Concrete, Box Pad	2,401.84	171.87
26 05 29 00-0610	EA	74" x 76", 36" Depth, Polymer Concrete, Box Pad	3,662.74	171.87
26 05 29 00-0611	EA	93" x 93", 36" Depth, Polymer Concrete, Box Pad	4,929.88	171.87
26 05 29 00-0612		**Polymer Concrete, Telecommunications Equipment Pads** *(26 05 29 00-0600)*		
26 05 29 00-0613	EA	42" x 42", 3" Thick, Polymer Concrete, Telecommunications Equipment Pad	697.14	71.88
26 05 29 00-0614	EA	48" x 46", 3" Thick, Polymer Concrete, Telecommunications Equipment Pad	830.75	71.88
26 05 29 00-0615	EA	60" x 42", 3" Thick, Polymer Concrete, Telecommunications Equipment Pad	1,082.22	103.12
26 05 29 00-0616	EA	54" x 48", 4" Thick, Polymer Concrete, Telecommunications Equipment Pad	1,131.88	103.12
26 05 29 00-0617	EA	57" x 60", 4" Thick, Polymer Concrete, Telecommunications Equipment Pad	1,637.42	103.12
26 05 29 00-0618	EA	72" x 60", 4" Thick, Polymer Concrete, Telecommunications Equipment Pad	1,707.69	103.12
26 05 29 00-0619	EA	64" x 72", 4" Thick, Polymer Concrete, Telecommunications Equipment Pad	1,838.61	103.12
26 05 29 00-0620	EA	72" x 64", 4" Thick, Polymer Concrete, Telecommunications Equipment Pad	1,838.61	103.12
26 05 29 00-0621	EA	76" x 84", 4" Thick, Polymer Concrete, Telecommunications Equipment Pad	3,483.40	103.12
26 05 29 00-0622	EA	96" x 84", 4" Thick, Polymer Concrete, Telecommunications Equipment Pad	3,952.72	103.12
26 05 29 00-0623		**Polymer Concrete, Electrical Equipment Pads** *(26 05 29 00-0600)*		
26 05 29 00-0624	EA	24" x 25", 2" Thick, Polymer Concrete, Electrical Equipment Pad	414.13	71.88
26 05 29 00-0625	EA	24" x 36", 2" Thick, Polymer Concrete, Electrical Equipment Pad	448.48	71.88
26 05 29 00-0626	EA	24" x 44", 2" Thick, Polymer Concrete, Electrical Equipment Pad	479.77	71.88

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 29 00-0627	EA	24" x 58", 2" Thick, Polymer Concrete, Electrical Equipment Pad	583.71	71.88
26 05 29 00-0628	EA	40" x 40", 3" Thick, Polymer Concrete, Electrical Equipment Pad	537.33	71.88
26 05 29 00-0629	EA	42" x 42", 3" Thick, Polymer Concrete, Electrical Equipment Pad	559.18	71.88
26 05 29 00-0630	EA	48" x 42", 4" Thick, Polymer Concrete, Electrical Equipment Pad	615.85	71.88
26 05 29 00-0631	EA	48" x 46", 3" Thick, Polymer Concrete, Electrical Equipment Pad	648.90	71.88
26 05 29 00-0632	EA	54" x 48", 4" Thick, Polymer Concrete, Electrical Equipment Pad	759.29	71.88
26 05 29 00-0633	EA	56" x 44", 3" Thick, Polymer Concrete, Electrical Equipment Pad	941.12	71.88
26 05 29 00-0634	EA	64" x 64", 4" Thick, Polymer Concrete, Electrical Equipment Pad	1,393.87	103.12
26 05 29 00-0635	EA	66" x 72", 4" Thick, Polymer Concrete, Electrical Equipment Pad	1,460.33	103.12
26 05 29 00-0636	EA	75" x 52", 4" Thick, Polymer Concrete, Electrical Equipment Pad	1,481.30	103.12
26 05 29 00-0637	EA	90" x 48", 4" Thick, Polymer Concrete, Electrical Equipment Pad	1,621.01	103.12
26 05 29 00-0638	EA	84" x 96", 4" Thick, Polymer Concrete, Electrical Equipment Pad	3,489.71	103.12
26 05 29 00-0639	EA	96" x 80", 4" Thick, Polymer Concrete, Electrical Equipment Pad	4,115.64	103.12

26 05 33 Raceway and Boxes for Electrical Systems *(26 05)*

26 05 33 13 Conduit for Electrical Systems *(26 05 33)*

26 05 33 13-0001 Conduit Assemblies With Wire Assemblies *(26 05 33 13)*

Note: Includes conduit, field bending conduit up to and including 1", fittings and wire. Excludes hangers or supports.

26 05 33 13-0002 Electrical Metallic Tubing (EMT) Conduit Assemblies *(26 05 33 13-0001)*

Note: Includes conduit, field bends, fittings, set screw connectors, set screw couplings, straps, and copper wire as indicated. Per CLF. See CSI section 26 05 19 16-0547 for larger copper conducter, 26 05 33 13-0599 for larger EMT conduit.

26 05 33 13-0003	CLF	1/2" Electrical Metallic Tubing (EMT) Conduit With 2 #12 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.	876.71	251.86
		For Work In Restricted Working Space, Add	*215.91*	
		For 2 #12 THWN Conductor Instead Of THHN, Add	*2.36*	
26 05 33 13-0004	CLF	1/2" Electrical Metallic Tubing (EMT) Conduit With 3 #12 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.	962.16	273.50
		For Work In Restricted Working Space, Add	*234.47*	
		For 3 #12 THWN Conductor Instead Of THHN, Add	*3.54*	
26 05 33 13-0005	CLF	1/2" Electrical Metallic Tubing (EMT) Conduit With 4 #12 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.	1,047.60	295.14
		For Work In Restricted Working Space, Add	*253.01*	
		For 4 #12 THWN Conductor Instead Of THHN, Add	*4.72*	
26 05 33 13-0006	CLF	1/2" Electrical Metallic Tubing (EMT) Conduit With 2 #10 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.	931.36	262.68
		For Work In Restricted Working Space, Add	*225.19*	
		For 2 #10 THWN Conductor Instead Of THHN, Add	*3.54*	
26 05 33 13-0007	CLF	1/2" Electrical Metallic Tubing (EMT) Conduit With 3 #10 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.	1,038.96	287.93
		For Work In Restricted Working Space, Add	*246.83*	
		For 3 #10 THWN Conductor Instead Of THHN, Add	*5.31*	
26 05 33 13-0008	CLF	1/2" Electrical Metallic Tubing (EMT) Conduit With 4 #10 Copper THHN And 1 #12 Copper Insulated Grounding Conducter Assembly Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.	1,146.58	313.18
		For Work In Restricted Working Space, Add	*268.47*	
		For 4 #10 THWN Conductor Instead Of THHN, Add	*7.08*	
26 05 33 13-0009	CLF	1/2" Electrical Metallic Tubing (EMT) Conduit With 2 #8 Copper THHN And 1 #10 Copper Insulated Grounding Conductor Assembly Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.	1,057.60	284.32
		For Work In Restricted Working Space, Add	*243.74*	
		For 2 #8 THWN Conductor Instead Of THHN, Add	*6.18*	
26 05 33 13-0010	CLF	3/4" Electrical Metallic Tubing (EMT) Conduit With 2 #12 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.	977.76	271.54
		For Work In Restricted Working Space, Add	*232.73*	
		For 2 #12 THWN Conductor Instead Of THHN, Add	*2.36*	
26 05 33 13-0011	CLF	3/4" Electrical Metallic Tubing (EMT) Conduit With 3 #12 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.	1,063.20	293.18
		For Work In Restricted Working Space, Add	*251.28*	
		For 3 #12 THWN Conductor Instead Of THHN, Add	*3.54*	
26 05 33 13-0012	CLF	3/4" Electrical Metallic Tubing (EMT) Conduit Assembly With 4 #12 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.	1,148.65	314.82
		For Work In Restricted Working Space, Add	*269.83*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0013	CLF	3/4" Electrical Metallic Tubing (EMT) Conduit With 5 #12 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly	1,234.11	336.46
		Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.		
		For Work In Restricted Working Space, Add	*288.38*	
		For 5 #12 THWN Conductor Instead Of THHN, Add	*5.90*	
26 05 33 13-0014	CLF	3/4" Electrical Metallic Tubing (EMT) Conduit With 2 #10 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly	1,032.40	282.36
		Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.		
		For Work In Restricted Working Space, Add	*242.00*	
		For 2 #10 THWN Conductor Instead Of THHN, Add	*3.54*	
26 05 33 13-0015	CLF	3/4" Electrical Metallic Tubing (EMT) Conduit With 3 #10 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly	1,140.02	307.61
		Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.		
		For Work In Restricted Working Space, Add	*263.65*	
		For 3 #10 THWN Conductor Instead Of THHN, Add	*5.31*	
26 05 33 13-0016	CLF	3/4" Electrical Metallic Tubing (EMT) Conduit With 4 #10 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly	1,247.63	332.86
		Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.		
		For Work In Restricted Working Space, Add	*285.29*	
		For 4 #10 THWN Conductor Instead Of THHN, Add	*7.08*	
26 05 33 13-0017	CLF	3/4" Electrical Metallic Tubing (EMT) Conduit With 5 #10 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly	1,355.25	358.11
		Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.		
		For Work In Restricted Working Space, Add	*306.93*	
		For 5 #10 THWN Conductor Instead Of THHN, Add	*8.85*	
26 05 33 13-0018	CLF	3/4" Electrical Metallic Tubing (EMT) Conduit With 3 #8 Copper THHN And 1 #10 Copper Insulated Grounding Conductor Assembly	1,313.15	336.46
		Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.		
		For Work In Restricted Working Space, Add	*288.38*	
		For 3 #8 THWN Conductor Instead Of THHN, Add	*9.26*	
26 05 33 13-0019	CLF	3/4" Electrical Metallic Tubing (EMT) Conduit With 4 #8 Copper THHN And 1 #10 Copper Insulated Grounding Conductor Assembly	1,467.64	368.93
		Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.		
		For Work In Restricted Working Space, Add	*316.20*	
		For 4 #8 THWN Conductor Instead Of THHN, Add	*12.35*	
26 05 33 13-0020	CLF	3/4" Electrical Metallic Tubing (EMT) Conduit With 2 #6 Copper THHN And 1 #8 Copper Insulated Grounding Conductor Assembly	1,327.45	325.64
		Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.		
		For Work In Restricted Working Space, Add	*279.11*	
		For 2 #6 THWN Conductor Instead Of THHN, Add	*10.21*	
26 05 33 13-0021	CLF	3/4" Electrical Metallic Tubing (EMT) Conduit With 3 #6 Copper THHN And 1 #8 Copper Insulated Grounding Conductor Assembly	1,542.90	365.32
		Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.		
		For Work In Restricted Working Space, Add	*313.11*	
		For 3 #6 THWN Conductor Instead Of THHN, Add	*15.32*	
26 05 33 13-0022	CLF	1" Electrical Metallic Tubing (EMT) Conduit With 2 #12 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly	1,122.75	292.26
		Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.		
		For Work In Restricted Working Space, Add	*250.54*	
		For 2 #12 THWN Conductor Instead Of THHN, Add	*2.36*	
26 05 33 13-0023	CLF	1" Electrical Metallic Tubing (EMT) Conduit With 3 #12 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly	1,208.20	313.90
		Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.		
		For Work In Restricted Working Space, Add	*269.09*	
		For 3 #12 THWN Conductor Instead Of THHN, Add	*3.54*	
26 05 33 13-0024	CLF	1" Electrical Metallic Tubing (EMT) Conduit With 4 #12 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly	1,293.64	335.54
		Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.		
		For Work In Restricted Working Space, Add	*287.64*	
26 05 33 13-0025	CLF	1" Electrical Metallic Tubing (EMT) Conduit With 5 #12 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly	1,379.09	357.18
		Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.		
		For Work In Restricted Working Space, Add	*306.19*	
		For 5 #12 THWN Conductor Instead Of THHN, Add	*5.90*	
26 05 33 13-0026	CLF	1" Electrical Metallic Tubing (EMT) Conduit With 2 #10 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly	1,177.40	303.08
		Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.		
		For Work In Restricted Working Space, Add	*259.82*	
		For 2 #10 THWN Conductor Instead Of THHN, Add	*3.54*	

copyright 2026 The Gordian Group, Inc.

	CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0027		CLF	1" Electrical Metallic Tubing (EMT) Conduit With 3 #10 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly	1,285.01	328.32
			Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.		
			For Work In Restricted Working Space, Add	*281.45*	
			For 3 #10 THWN Conductor Instead Of THHN, Add	*5.31*	
26 05 33 13-0028		CLF	1" Electrical Metallic Tubing (EMT) Conduit With 4 #10 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly	1,392.63	353.57
			Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.		
			For Work In Restricted Working Space, Add	*303.10*	
			For 4 #10 THWN Conductor Instead Of THHN, Add	*7.08*	
26 05 33 13-0029		CLF	1" Electrical Metallic Tubing (EMT) Conduit With 5 #10 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly	1,500.24	378.82
			Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.		
			For Work In Restricted Working Space, Add	*324.74*	
			For 5 #10 THWN Conductor Instead Of THHN, Add	*8.85*	
26 05 33 13-0030		CLF	1" Electrical Metallic Tubing (EMT) Conduit Assembly With 3 #8 Copper THHN And 1 #10 Copper Insulated Grounding Conductor Assembly	1,458.13	357.18
			Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.		
			For Work In Restricted Working Space, Add	*306.19*	
			For 3 #8 THWN Conductor Instead Of THHN, Add	*9.26*	
26 05 33 13-0031		CLF	1" Electrical Metallic Tubing (EMT) Conduit With 3 #6 Copper THHN And 1 #8 Copper Insulated Grounding Conductor Assembly	1,687.89	386.04
			Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.		
			For Work In Restricted Working Space, Add	*330.92*	
			For 3 #6 THWN Conductor Instead Of THHN, Add	*15.32*	
26 05 33 13-0032		CLF	1" Electrical Metallic Tubing (EMT) Conduit With 4 #6 Copper THHN And 1 #8 Copper Insulated Grounding Conductor Assembly	1,903.34	425.70
			Note: Includes conduit, set screw connectors, set screw couplings, straps, wire as indicated. Not for use where detail is available.		
			For Work In Restricted Working Space, Add	*364.92*	
			For 4 #6 THWN Conductor Instead Of THHN, Add	*20.42*	

26 05 33 13-0033 Rigid Galvanized Steel (RGS) Conduit Assemblies *(26 05 33 13-0001)*

Note: Includes conduit, field bends, fittings, terminations, straps, and copper wire as indicated. Per CLF. See CSI section 26 05 19 16-0547 for larger copper conducter, 26 05 33 13-0060 for larger RGS conduit.

26 05 33 13-0034		CLF	1/2" Rigid Galvanized Steel (RGS) Conduit With 2 #12 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly	1,178.82	286.69
			Note: Includes conduit, terminations, straps, wire as indicated. Not for use where detail is available.		
			For Work In Restricted Working Space, Add	*245.72*	
			For 2 #12 THWN Conductor Instead Of THHN, Add	*2.36*	
26 05 33 13-0035		CLF	1/2" Rigid Galvanized Steel (RGS) Conduit With 3 #12 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly	1,264.28	308.33
			Note: Includes conduit, terminations, straps, wire as indicated. Not for use where detail is available.		
			For Work In Restricted Working Space, Add	*264.27*	
			For 3 #12 THWN Conductor Instead Of THHN, Add	*3.54*	
26 05 33 13-0036		CLF	1/2" Rigid Galvanized Steel (RGS) Conduit With 2 #10 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly	1,233.47	297.51
			Note: Includes conduit, terminations, straps, wire as indicated. Not for use where detail is available.		
			For Work In Restricted Working Space, Add	*254.99*	
			For 2 #10 THWN Conductor Instead Of THHN, Add	*3.54*	
26 05 33 13-0037		CLF	1/2" Rigid Galvanized Steel (RGS) Conduit With 3 #10 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly	1,341.08	322.76
			Note: Includes conduit, terminations, straps, wire as indicated. Not for use where detail is available.		
			For Work In Restricted Working Space, Add	*276.63*	
			For 3 #10 THWN Conductor Instead Of THHN, Add	*5.31*	
26 05 33 13-0038		CLF	1/2" Rigid Galvanized Steel (RGS) Conduit With 2 #8 Copper THHN And 1 #10 Copper Insulated Grounding Conductor Assembly	1,359.71	319.15
			Note: Includes conduit, terminations, straps, wire as indicated. Not for use where detail is available.		
			For Work In Restricted Working Space, Add	*273.54*	
			For 2 #8 THWN Conductor Instead Of THHN, Add	*6.18*	
26 05 33 13-0039		CLF	3/4" Rigid Galvanized Steel (RGS) Conduit With 2 #12 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly	1,300.75	305.76
			Note: Includes conduit, terminations, straps, wire as indicated. Not for use where detail is available.		
			For Work In Restricted Working Space, Add	*262.04*	
			For 2 #12 THWN Conductor Instead Of THHN, Add	*2.36*	
26 05 33 13-0040		CLF	3/4" Rigid Galvanized Steel (RGS) Conduit With 3 #12 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly	1,386.20	327.39
			Note: Includes conduit, terminations, straps, wire as indicated. Not for use where detail is available.		
			For Work In Restricted Working Space, Add	*280.59*	
			For 3 #12 THWN Conductor Instead Of THHN, Add	*3.54*	
26 05 33 13-0041		CLF	3/4" Rigid Galvanized Steel (RGS) Conduit With 4 #12 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly	1,471.64	349.03
			Note: Includes conduit, terminations, straps, wire as indicated. Not for use where detail is available.		
			For Work In Restricted Working Space, Add	*299.14*	
26 05 33 13-0042		CLF	3/4" Rigid Galvanized Steel (RGS) Conduit With 2 #10 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly	1,355.39	316.58
			Note: Includes conduit, terminations, straps, wire as indicated. Not for use where detail is available.		
			For Work In Restricted Working Space, Add	*271.31*	
			For 2 #10 THWN Conductor Instead Of THHN, Add	*3.54*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0043	CLF	3/4" Rigid Galvanized Steel (RGS) Conduit With 3 #10 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly	1,463.01	341.82
		Note: Includes conduit, terminations, straps, wire as indicated. Not for use where detail is available.		
		For Work In Restricted Working Space, Add	*292.96*	
		For 3 #10 THWN Conductor Instead Of THHN, Add	*5.31*	
26 05 33 13-0044	CLF	3/4" Rigid Galvanized Steel (RGS) Conduit With 4 #10 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly	1,570.63	367.07
		Note: Includes conduit, terminations, straps, wire as indicated. Not for use where detail is available.		
		For Work In Restricted Working Space, Add	*314.60*	
		For 4 #10 THWN Conductor Instead Of THHN, Add	*7.08*	
26 05 33 13-0045	CLF	3/4" Rigid Galvanized Steel (RGS) Conduit With 3 #8 Copper THHN And 1 #10 Copper Insulated Grounding Conductor Assembly	1,636.12	370.67
		Note: Includes conduit, terminations, straps, wire as indicated. Not for use where detail is available.		
		For Work In Restricted Working Space, Add	*317.69*	
		For 3 #8 THWN Conductor Instead Of THHN, Add	*9.26*	
26 05 33 13-0046	CLF	3/4" Rigid Galvanized Steel (RGS) Conduit With 4 #8 Copper THHN And 1 #10 Copper Insulated Grounding Conductor Assembly	1,790.63	403.14
		Note: Includes conduit, terminations, straps, wire as indicated. Not for use where detail is available.		
		For Work In Restricted Working Space, Add	*345.51*	
		For 4 #8 THWN Conductor Instead Of THHN, Add	*12.35*	
26 05 33 13-0047	CLF	3/4" Rigid Galvanized Steel (RGS) Conduit With 2 #6 Copper THHN And 1 #8 Copper Insulated Grounding Conductor Assembly	1,650.43	359.85
		Note: Includes conduit, terminations, straps, wire as indicated. Not for use where detail is available.		
		For Work In Restricted Working Space, Add	*308.41*	
		For 2 #6 THWN Conductor Instead Of THHN, Add	*10.21*	
26 05 33 13-0048	CLF	3/4" Rigid Galvanized Steel (RGS) Conduit With 3 #6 Copper THHN And 1 #8 Copper Insulated Grounding Conductor Assembly	1,865.89	399.53
		Note: Includes conduit, terminations, straps, wire as indicated. Not for use where detail is available.		
		For Work In Restricted Working Space, Add	*342.42*	
		For 3 #6 THWN Conductor Instead Of THHN, Add	*15.32*	
26 05 33 13-0049	CLF	1" Rigid Galvanized Steel (RGS) Conduit With 3 #12 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly	1,689.51	365.11
		Note: Includes conduit, terminations, straps, wire as indicated. Not for use where detail is available.		
		For Work In Restricted Working Space, Add	*312.96*	
		For 3 #12 THWN Conductor Instead Of THHN, Add	*3.54*	
26 05 33 13-0050	CLF	1" Rigid Galvanized Steel (RGS) Conduit With 4 #12 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly	1,774.95	386.76
		Note: Includes conduit, terminations, straps, wire as indicated. Not for use where detail is available.		
		For Work In Restricted Working Space, Add	*331.51*	
26 05 33 13-0051	CLF	1" Rigid Galvanized Steel (RGS) Conduit With 5 #12 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly	1,860.40	408.40
		Note: Includes conduit, terminations, straps, wire as indicated. Not for use where detail is available.		
		For Work In Restricted Working Space, Add	*350.06*	
		For 5 #12 THWN Conductor Instead Of THHN, Add	*5.90*	
26 05 33 13-0052	CLF	1" Rigid Galvanized Steel (RGS) Conduit With 3 #10 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly	1,766.32	379.54
		Note: Includes conduit, terminations, straps, wire as indicated. Not for use where detail is available.		
		For Work In Restricted Working Space, Add	*325.32*	
		For 3 #10 THWN Conductor Instead Of THHN, Add	*5.31*	
26 05 33 13-0053	CLF	1" Rigid Galvanized Steel (RGS) Conduit With 4 #10 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly	1,873.94	404.79
		Note: Includes conduit, terminations, straps, wire as indicated. Not for use where detail is available.		
		For Work In Restricted Working Space, Add	*346.97*	
		For 4 #10 THWN Conductor Instead Of THHN, Add	*7.08*	
26 05 33 13-0054	CLF	1" Rigid Galvanized Steel (RGS) Conduit With 5 #10 Copper THHN And 1 #12 Copper Insulated Grounding Conductor Assembly	1,981.54	430.04
		Note: Includes conduit, terminations, straps, wire as indicated. Not for use where detail is available.		
		For Work In Restricted Working Space, Add	*368.60*	
		For 5 #10 THWN Conductor Instead Of THHN, Add	*8.85*	
26 05 33 13-0055	CLF	1" Rigid Galvanized Steel (RGS) Conduit With 3 #8 Copper THHN And 1 #10 Copper Insulated Grounding Conductor Assembly	1,939.44	408.40
		Note: Includes conduit, terminations, straps, wire as indicated. Not for use where detail is available.		
		For Work In Restricted Working Space, Add	*350.06*	
		For 3 #8 THWN Conductor Instead Of THHN, Add	*9.26*	
26 05 33 13-0056	CLF	1" Rigid Galvanized Steel (RGS) Conduit With 3 #6 Copper THHN And 1 #8 Copper Insulated Grounding Conductor Assembly	2,169.20	437.25
		Note: Includes conduit, terminations, straps, wire as indicated. Not for use where detail is available.		
		For Work In Restricted Working Space, Add	*374.79*	
		For 3 #6 THWN Conductor Instead Of THHN, Add	*15.32*	
26 05 33 13-0057	CLF	1" Rigid Galvanized Steel (RGS) Conduit With 4 #6 Copper THHN And 1 #8 Copper Insulated Grounding Conductor Assembly	2,384.66	476.92
		Note: Includes conduit, terminations, straps, wire as indicated. Not for use where detail is available.		
		For Work In Restricted Working Space, Add	*408.80*	
		For 4 #6 THWN Conductor Instead Of THHN, Add	*20.42*	

26 05 33 13-0058 Conduit *(26 05 33 13)*
Note: Where 4-1/2" conduit is required, use tasks for 5" conduit. Add couplings as required at each fitting.

26 05 33 13-0059 Conduit Installed Above Grade *(26 05 33 13-0058)*
See CSI section 26 05 29 00-0000 for supporting strap, hanger and fastening.

26 05 33 13-0060 Rigid Galvanized Steel (RGS) Or Galvanized Rigid Steel Conduit (GRC) Conduit *(26 05 33 13-0059)*
Note: Exposed installation, branch and feeder conduit. Excludes supporting strap, hanger and fastening.

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0061		Rigid Galvanized Steel (RGS) Conduit With Threaded Coupling *(26 05 33 13-0060)* Note: Includes field bending conduit up to and including 1". See CSI section 26 05 33 13-2319 for field bending >1".			
26 05 33 13-0062	LF	1/2" Rigid Galvanized Steel (RGS) Conduit With Threaded Coupling		8.42	2.27
		For >250 To 500, Deduct		*-0.14*	
		For >500 To 1,000, Deduct		*-0.49*	
		For >1,000, Deduct		*-0.70*	
		For Installation In Metal Stud Wall, Add		*0.57*	
		For Installation In Wood Stud Wall (Includes Drilling), Add		*1.42*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add		*0.85*	
		For Work In Restricted Working Space, Add		*1.70*	
		For Elevated Installation >10' To 15' Above Floor, Add		*0.57*	
		For Elevated Installation >15' To 20' Above Floor, Add		*1.13*	
		For Elevated Installation >20' To 25' Above Floor, Add		*1.42*	
		For Elevated Installation >25' To 30' Above Floor, Add		*1.98*	
		For Elevated Installation >30' To 35' Above Floor, Add		*2.27*	
		For Elevated Installation >35' To 40' Above Floor, Add		*2.84*	
		For Elevated Installation >40' Above Floor, Add		*3.12*	
26 05 33 13-0063	LF	3/4" Rigid Galvanized Steel (RGS) Conduit With Threaded Coupling		10.00	2.48
		For >250 To 500, Deduct		*-0.17*	
		For >500 To 1,000, Deduct		*-0.59*	
		For >1,000, Deduct		*-0.84*	
		For Installation In Metal Stud Wall, Add		*0.66*	
		For Installation In Wood Stud Wall (Includes Drilling), Add		*1.65*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add		*0.99*	
		For Work In Restricted Working Space, Add		*1.98*	
		For Elevated Installation >10' To 15' Above Floor, Add		*0.66*	
		For Elevated Installation >15' To 20' Above Floor, Add		*1.32*	
		For Elevated Installation >20' To 25' Above Floor, Add		*1.65*	
		For Elevated Installation >25' To 30' Above Floor, Add		*2.31*	
		For Elevated Installation >30' To 35' Above Floor, Add		*2.64*	
		For Elevated Installation >35' To 40' Above Floor, Add		*3.30*	
		For Elevated Installation >40' Above Floor, Add		*3.63*	
26 05 33 13-0064	LF	1" Rigid Galvanized Steel (RGS) Conduit With Threaded Coupling		14.12	2.89
		For >250 To 500, Deduct		*-0.26*	
		For >500 To 1,000, Deduct		*-0.84*	
		For >1,000, Deduct		*-1.19*	
		For Installation In Metal Stud Wall, Add		*0.89*	
		For Installation In Wood Stud Wall (Includes Drilling), Add		*2.22*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add		*1.33*	
		For Work In Restricted Working Space, Add		*2.66*	
		For Elevated Installation >10' To 15' Above Floor, Add		*0.89*	
		For Elevated Installation >15' To 20' Above Floor, Add		*1.77*	
		For Elevated Installation >20' To 25' Above Floor, Add		*2.22*	
		For Elevated Installation >25' To 30' Above Floor, Add		*3.10*	
		For Elevated Installation >30' To 35' Above Floor, Add		*3.54*	
		For Elevated Installation >35' To 40' Above Floor, Add		*4.43*	
		For Elevated Installation >40' Above Floor, Add		*4.87*	
26 05 33 13-0065	LF	1-1/4" Rigid Galvanized Steel (RGS) Conduit With Threaded Coupling		16.39	3.30
		For >250 To 500, Deduct		*-0.35*	
		For >500 To 1,000, Deduct		*-0.99*	
		For >1,000, Deduct		*-1.40*	
		For Installation In Metal Stud Wall, Add		*0.94*	
		For Installation In Wood Stud Wall (Includes Drilling), Add		*2.35*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add		*1.41*	
		For Work In Restricted Working Space, Add		*2.81*	
		For Elevated Installation >10' To 15' Above Floor, Add		*0.94*	
		For Elevated Installation >15' To 20' Above Floor, Add		*1.88*	
		For Elevated Installation >20' To 25' Above Floor, Add		*2.35*	
		For Elevated Installation >25' To 30' Above Floor, Add		*3.28*	
		For Elevated Installation >30' To 35' Above Floor, Add		*3.75*	
		For Elevated Installation >35' To 40' Above Floor, Add		*4.69*	
		For Elevated Installation >40' Above Floor, Add		*5.16*	
26 05 33 13-0066	LF	1-1/2" Rigid Galvanized Steel (RGS) Conduit With Threaded Coupling		18.90	3.71
		For >250 To 500, Deduct		*-0.43*	
		For >500 To 1,000, Deduct		*-1.16*	
		For >1,000, Deduct		*-1.63*	
		For Installation In Metal Stud Wall, Add		*1.03*	
		For Installation In Wood Stud Wall (Includes Drilling), Add		*2.58*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add		*1.55*	
		For Work In Restricted Working Space, Add		*3.09*	
		For Elevated Installation >10' To 15' Above Floor, Add		*1.03*	
		For Elevated Installation >15' To 20' Above Floor, Add		*2.06*	
		For Elevated Installation >20' To 25' Above Floor, Add		*2.58*	
		For Elevated Installation >25' To 30' Above Floor, Add		*3.61*	
		For Elevated Installation >30' To 35' Above Floor, Add		*4.12*	
		For Elevated Installation >35' To 40' Above Floor, Add		*5.16*	
		For Elevated Installation >40' Above Floor, Add		*5.67*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0067	LF	2" Rigid Galvanized Steel (RGS) Conduit With Threaded Coupling	24.15	4.53
		For >250 To 500, Deduct	*-0.57*	
		For >500 To 1,000, Deduct	*-1.49*	
		For >1,000, Deduct	*-2.10*	
		For Installation In Metal Stud Wall, Add	*1.27*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*3.17*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*1.90*	
		For Work In Restricted Working Space, Add	*3.80*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.27*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.53*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.17*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.43*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.07*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.34*	
		For Elevated Installation >40' Above Floor, Add	*6.97*	
26 05 33 13-0068	LF	2-1/2" Rigid Galvanized Steel (RGS) Conduit With Threaded Coupling	36.24	6.19
		For >250 To 500, Deduct	*-0.95*	
		For >500 To 1,000, Deduct	*-2.29*	
		For >1,000, Deduct	*-3.19*	
		For Installation In Metal Stud Wall, Add	*1.72*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*4.30*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*2.58*	
		For Work In Restricted Working Space, Add	*5.16*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.72*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.44*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.30*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.88*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.61*	
		For Elevated Installation >40' Above Floor, Add	*9.47*	
26 05 33 13-0069	LF	3" Rigid Galvanized Steel (RGS) Conduit With Threaded Coupling	47.40	8.24
		For >250 To 500, Deduct	*-1.21*	
		For >500 To 1,000, Deduct	*-2.98*	
		For >1,000, Deduct	*-4.16*	
		For Installation In Metal Stud Wall, Add	*2.32*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*5.80*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*3.48*	
		For Work In Restricted Working Space, Add	*6.95*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.32*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.64*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.80*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.11*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.27*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.59*	
		For Elevated Installation >40' Above Floor, Add	*12.75*	
26 05 33 13-0070	LF	3-1/2" Rigid Galvanized Steel (RGS) Conduit With Threaded Coupling	57.07	10.31
		For >250 To 500, Deduct	*-1.48*	
		For >500 To 1,000, Deduct	*-3.59*	
		For >1,000, Deduct	*-5.02*	
		For Installation In Metal Stud Wall, Add	*2.75*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*6.88*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*4.13*	
		For Work In Restricted Working Space, Add	*8.26*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.75*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.50*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.01*	
		For Elevated Installation >35' To 40' Above Floor, Add	*13.76*	
		For Elevated Installation >40' Above Floor, Add	*15.14*	
26 05 33 13-0071	LF	4" Rigid Galvanized Steel (RGS) Conduit With Threaded Coupling	67.84	12.36
		For >250 To 500, Deduct	*-1.81*	
		For >500 To 1,000, Deduct	*-4.29*	
		For >1,000, Deduct	*-5.99*	
		For Installation In Metal Stud Wall, Add	*3.17*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*7.94*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*4.76*	
		For Work In Restricted Working Space, Add	*9.52*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.17*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.35*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.94*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.11*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.70*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.87*	
		For Elevated Installation >40' Above Floor, Add	*17.46*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0072	LF	5" Rigid Galvanized Steel (RGS) Conduit With Threaded Coupling	108.86	15.66
		For >250 To 500, Deduct	*-3.49*	
		For >500 To 1,000, Deduct	*-7.19*	
		For >1,000, Deduct	*-9.91*	
		For Installation In Metal Stud Wall, Add	*3.92*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*9.79*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*5.87*	
		For Work In Restricted Working Space, Add	*11.75*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.92*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.83*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.79*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.66*	
		For Elevated Installation >35' To 40' Above Floor, Add	*19.58*	
		For Elevated Installation >40' Above Floor, Add	*21.54*	
26 05 33 13-0073	LF	6" Rigid Galvanized Steel (RGS) Conduit With Threaded Coupling	147.43	19.78
		For >250 To 500, Deduct	*-4.90*	
		For >500 To 1,000, Deduct	*-9.82*	
		For >1,000, Deduct	*-13.51*	
		For Installation In Metal Stud Wall, Add	*4.95*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*12.37*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*7.42*	
		For Work In Restricted Working Space, Add	*14.84*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.95*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.89*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.31*	
		For Elevated Installation >30' To 35' Above Floor, Add	*19.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*24.74*	
		For Elevated Installation >40' Above Floor, Add	*27.21*	

26 05 33 13-0074 Rigid Galvanized Steel (RGS) 90 Degree Standard Radius Elbow *(26 05 33 13-0060)*

See CSI section 26 05 33 13-2319 for conduit field bending.

26 05 33 13-0075	EA	1/2" Rigid Galvanized Steel (RGS) 90 Degree Standard Radius Elbow	31.35	10.20
		For Work In Restricted Working Space, Add	*7.68*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.56*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.12*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.40*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.96*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.24*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.80*	
		For Elevated Installation >40' Above Floor, Add	*14.07*	
26 05 33 13-0076	EA	3/4" Rigid Galvanized Steel (RGS) 90 Degree Standard Radius Elbow	39.41	12.67
		For Work In Restricted Working Space, Add	*9.54*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.18*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.36*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.95*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.13*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.72*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.91*	
		For Elevated Installation >40' Above Floor, Add	*17.50*	
26 05 33 13-0077	EA	1" Rigid Galvanized Steel (RGS) 90 Degree Standard Radius Elbow	50.49	15.56
		For Work In Restricted Working Space, Add	*11.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.88*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.76*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.70*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.58*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.52*	
		For Elevated Installation >35' To 40' Above Floor, Add	*19.40*	
		For Elevated Installation >40' Above Floor, Add	*21.34*	
26 05 33 13-0078	EA	1-1/4" Rigid Galvanized Steel (RGS) 90 Degree Standard Radius Elbow	65.03	18.03
		For Work In Restricted Working Space, Add	*13.51*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.50*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.01*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.26*	
		For Elevated Installation >25' To 30' Above Floor, Add	*15.76*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.02*	
		For Elevated Installation >35' To 40' Above Floor, Add	*22.52*	
		For Elevated Installation >40' Above Floor, Add	*24.77*	
26 05 33 13-0079	EA	1-1/2" Rigid Galvanized Steel (RGS) 90 Degree Standard Radius Elbow	75.54	20.72
		For Work In Restricted Working Space, Add	*15.51*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.17*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.34*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.93*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.68*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.85*	
		For Elevated Installation >40' Above Floor, Add	*28.44*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0080	EA	2" Rigid Galvanized Steel (RGS) 90 Degree Standard Radius Elbow	89.66	22.77
		For Work In Restricted Working Space, Add	*17.06*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.69*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.38*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*19.91*	
		For Elevated Installation >30' To 35' Above Floor, Add	*22.75*	
		For Elevated Installation >35' To 40' Above Floor, Add	*28.44*	
		For Elevated Installation >40' Above Floor, Add	*31.28*	
26 05 33 13-0081	EA	2-1/2" Rigid Galvanized Steel (RGS) 90 Degree Standard Radius Elbow	129.51	28.44
		For Work In Restricted Working Space, Add	*21.33*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.11*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.22*	
		For Elevated Installation >20' To 25' Above Floor, Add	*17.78*	
		For Elevated Installation >25' To 30' Above Floor, Add	*24.89*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.44*	
		For Elevated Installation >35' To 40' Above Floor, Add	*35.55*	
		For Elevated Installation >40' Above Floor, Add	*39.11*	
26 05 33 13-0082	EA	3" Rigid Galvanized Steel (RGS) 90 Degree Standard Radius Elbow	183.82	38.75
		For Work In Restricted Working Space, Add	*29.06*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.69*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.21*	
		For Elevated Installation >25' To 30' Above Floor, Add	*33.90*	
		For Elevated Installation >30' To 35' Above Floor, Add	*38.74*	
		For Elevated Installation >35' To 40' Above Floor, Add	*48.43*	
		For Elevated Installation >40' Above Floor, Add	*53.27*	
26 05 33 13-0083	EA	3-1/2" Rigid Galvanized Steel (RGS) 90 Degree Standard Radius Elbow	245.21	43.69
		For Work In Restricted Working Space, Add	*32.78*	
		For Elevated Installation >10' To 15' Above Floor, Add	*10.93*	
		For Elevated Installation >15' To 20' Above Floor, Add	*21.85*	
		For Elevated Installation >20' To 25' Above Floor, Add	*27.31*	
		For Elevated Installation >25' To 30' Above Floor, Add	*38.24*	
		For Elevated Installation >30' To 35' Above Floor, Add	*43.70*	
		For Elevated Installation >35' To 40' Above Floor, Add	*54.63*	
		For Elevated Installation >40' Above Floor, Add	*60.09*	
26 05 33 13-0084	EA	4" Rigid Galvanized Steel (RGS) 90 Degree Standard Radius Elbow	298.87	56.89
		For Work In Restricted Working Space, Add	*42.65*	
		For Elevated Installation >10' To 15' Above Floor, Add	*14.22*	
		For Elevated Installation >15' To 20' Above Floor, Add	*28.44*	
		For Elevated Installation >20' To 25' Above Floor, Add	*35.55*	
		For Elevated Installation >25' To 30' Above Floor, Add	*49.76*	
		For Elevated Installation >30' To 35' Above Floor, Add	*56.87*	
		For Elevated Installation >35' To 40' Above Floor, Add	*71.09*	
		For Elevated Installation >40' Above Floor, Add	*78.20*	
26 05 33 13-0085	EA	5" Rigid Galvanized Steel (RGS) 90 Degree Standard Radius Elbow	488.97	92.74
		For Work In Restricted Working Space, Add	*69.56*	
		For Elevated Installation >10' To 15' Above Floor, Add	*23.19*	
		For Elevated Installation >15' To 20' Above Floor, Add	*46.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*57.97*	
		For Elevated Installation >25' To 30' Above Floor, Add	*81.15*	
		For Elevated Installation >30' To 35' Above Floor, Add	*92.75*	
		For Elevated Installation >35' To 40' Above Floor, Add	*115.94*	
		For Elevated Installation >40' Above Floor, Add	*127.53*	
26 05 33 13-0086	EA	6" Rigid Galvanized Steel (RGS) 90 Degree Standard Radius Elbow	735.14	139.32
		For Work In Restricted Working Space, Add	*104.49*	
		For Elevated Installation >10' To 15' Above Floor, Add	*34.83*	
		For Elevated Installation >15' To 20' Above Floor, Add	*69.66*	
		For Elevated Installation >20' To 25' Above Floor, Add	*87.07*	
		For Elevated Installation >25' To 30' Above Floor, Add	*121.90*	
		For Elevated Installation >30' To 35' Above Floor, Add	*139.32*	
		For Elevated Installation >35' To 40' Above Floor, Add	*174.15*	
		For Elevated Installation >40' Above Floor, Add	*191.56*	

26 05 33 13-0087 Rigid Galvanized Steel (RGS) 45 Degree Standard Radius Elbow *(26 05 33 13-0060)*

See CSI section 26 05 33 13-2319 for conduit field bending.

26 05 33 13-0088	EA	1/2" Rigid Galvanized Steel (RGS) 45 Degree Standard Radius Elbow	31.35	10.20
		For Work In Restricted Working Space, Add	*7.68*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.56*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.12*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.40*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.96*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.24*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.80*	
		For Elevated Installation >40' Above Floor, Add	*14.07*	
26 05 33 13-0089	EA	3/4" Rigid Galvanized Steel (RGS) 45 Degree Standard Radius Elbow	39.41	12.67
		For Work In Restricted Working Space, Add	*9.54*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.18*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.36*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.95*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.13*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.72*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.91*	
		For Elevated Installation >40' Above Floor, Add	*17.50*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0090	EA	1" Rigid Galvanized Steel (RGS) 45 Degree Standard Radius Elbow	50.49	15.56
		For Work In Restricted Working Space, Add	*11.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.88*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.76*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.70*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.58*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.52*	
		For Elevated Installation >35' To 40' Above Floor, Add	*19.40*	
		For Elevated Installation >40' Above Floor, Add	*21.34*	
26 05 33 13-0091	EA	1-1/4" Rigid Galvanized Steel (RGS) 45 Degree Standard Radius Elbow	65.03	18.03
		For Work In Restricted Working Space, Add	*13.51*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.50*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.01*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.26*	
		For Elevated Installation >25' To 30' Above Floor, Add	*15.76*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.02*	
		For Elevated Installation >35' To 40' Above Floor, Add	*22.52*	
		For Elevated Installation >40' Above Floor, Add	*24.77*	
26 05 33 13-0092	EA	1-1/2" Rigid Galvanized Steel (RGS) 45 Degree Standard Radius Elbow	75.55	20.72
		For Work In Restricted Working Space, Add	*15.51*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.17*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.34*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.93*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.68*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.85*	
		For Elevated Installation >40' Above Floor, Add	*28.44*	
26 05 33 13-0093	EA	2" Rigid Galvanized Steel (RGS) 45 Degree Standard Radius Elbow	89.66	22.77
		For Work In Restricted Working Space, Add	*17.06*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.69*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.38*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*19.91*	
		For Elevated Installation >30' To 35' Above Floor, Add	*22.75*	
		For Elevated Installation >35' To 40' Above Floor, Add	*28.44*	
		For Elevated Installation >40' Above Floor, Add	*31.28*	
26 05 33 13-0094	EA	2-1/2" Rigid Galvanized Steel (RGS) 45 Degree Standard Radius Elbow	127.14	28.44
		For Work In Restricted Working Space, Add	*21.33*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.11*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.22*	
		For Elevated Installation >20' To 25' Above Floor, Add	*17.78*	
		For Elevated Installation >25' To 30' Above Floor, Add	*24.89*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.44*	
		For Elevated Installation >35' To 40' Above Floor, Add	*35.55*	
		For Elevated Installation >40' Above Floor, Add	*39.11*	
26 05 33 13-0095	EA	3" Rigid Galvanized Steel (RGS) 45 Degree Standard Radius Elbow	174.58	38.75
		For Work In Restricted Working Space, Add	*29.06*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.69*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.21*	
		For Elevated Installation >25' To 30' Above Floor, Add	*33.90*	
		For Elevated Installation >30' To 35' Above Floor, Add	*38.74*	
		For Elevated Installation >35' To 40' Above Floor, Add	*48.43*	
		For Elevated Installation >40' Above Floor, Add	*53.27*	
26 05 33 13-0096	EA	3-1/2" Rigid Galvanized Steel (RGS) 45 Degree Standard Radius Elbow	232.22	43.69
		For Work In Restricted Working Space, Add	*32.78*	
		For Elevated Installation >10' To 15' Above Floor, Add	*10.93*	
		For Elevated Installation >15' To 20' Above Floor, Add	*21.85*	
		For Elevated Installation >20' To 25' Above Floor, Add	*27.31*	
		For Elevated Installation >25' To 30' Above Floor, Add	*38.24*	
		For Elevated Installation >30' To 35' Above Floor, Add	*43.70*	
		For Elevated Installation >35' To 40' Above Floor, Add	*54.63*	
		For Elevated Installation >40' Above Floor, Add	*60.09*	
26 05 33 13-0097	EA	4" Rigid Galvanized Steel (RGS) 45 Degree Standard Radius Elbow	281.59	56.89
		For Work In Restricted Working Space, Add	*42.65*	
		For Elevated Installation >10' To 15' Above Floor, Add	*14.22*	
		For Elevated Installation >15' To 20' Above Floor, Add	*28.44*	
		For Elevated Installation >20' To 25' Above Floor, Add	*35.55*	
		For Elevated Installation >25' To 30' Above Floor, Add	*49.76*	
		For Elevated Installation >30' To 35' Above Floor, Add	*56.87*	
		For Elevated Installation >35' To 40' Above Floor, Add	*71.09*	
		For Elevated Installation >40' Above Floor, Add	*78.20*	
26 05 33 13-0098	EA	5" Rigid Galvanized Steel (RGS) 45 Degree Standard Radius Elbow	488.97	92.74
		For Work In Restricted Working Space, Add	*69.56*	
		For Elevated Installation >10' To 15' Above Floor, Add	*23.19*	
		For Elevated Installation >15' To 20' Above Floor, Add	*46.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*57.97*	
		For Elevated Installation >25' To 30' Above Floor, Add	*81.15*	
		For Elevated Installation >30' To 35' Above Floor, Add	*92.75*	
		For Elevated Installation >35' To 40' Above Floor, Add	*115.94*	
		For Elevated Installation >40' Above Floor, Add	*127.53*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0099	EA	6" Rigid Galvanized Steel (RGS) 45 Degree Standard Radius Elbow	735.14	139.32
		For Work In Restricted Working Space, Add	*104.49*	
		For Elevated Installation >10' To 15' Above Floor, Add	*34.83*	
		For Elevated Installation >15' To 20' Above Floor, Add	*69.66*	
		For Elevated Installation >20' To 25' Above Floor, Add	*87.07*	
		For Elevated Installation >25' To 30' Above Floor, Add	*121.90*	
		For Elevated Installation >30' To 35' Above Floor, Add	*139.32*	
		For Elevated Installation >35' To 40' Above Floor, Add	*174.15*	
		For Elevated Installation >40' Above Floor, Add	*191.56*	

26 05 33 13-0100 Rigid Galvanized Steel (RGS) 12" Large Radius Elbow *(26 05 33 13-0060)*

See CSI section 26 05 33 13-2319 for conduit field bending.

26 05 33 13-0101	EA	1" Rigid Galvanized Steel (RGS) 12" Large Radius Elbow	78.75	25.45
		For Work In Restricted Working Space, Add	*15.27*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
26 05 33 13-0102	EA	1-1/4" Rigid Galvanized Steel (RGS) 12" Large Radius Elbow	90.72	29.47
		For Work In Restricted Working Space, Add	*17.68*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
26 05 33 13-0103	EA	1-1/2" Rigid Galvanized Steel (RGS) 12" Large Radius Elbow	105.05	33.49
		For Work In Restricted Working Space, Add	*20.09*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	
26 05 33 13-0104	EA	2" Rigid Galvanized Steel (RGS) 12" Large Radius Elbow	118.54	36.84
		For Work In Restricted Working Space, Add	*22.10*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	

26 05 33 13-0105 Rigid Galvanized Steel (RGS) 15" Large Radius Elbow *(26 05 33 13-0060)*

See CSI section 26 05 33 13-2319 for conduit field bending.

26 05 33 13-0106	EA	1" Rigid Galvanized Steel (RGS) 15" Large Radius Elbow	85.98	25.45
		For Work In Restricted Working Space, Add	*15.27*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
26 05 33 13-0107	EA	1-1/4" Rigid Galvanized Steel (RGS) 15" Large Radius Elbow	100.00	29.47
		For Work In Restricted Working Space, Add	*17.68*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
26 05 33 13-0108	EA	1-1/2" Rigid Galvanized Steel (RGS) 15" Large Radius Elbow	109.28	33.49
		For Work In Restricted Working Space, Add	*20.09*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0109	EA	2" Rigid Galvanized Steel (RGS) 15" Large Radius Elbow	123.26	36.84
		For Work In Restricted Working Space, Add	*22.10*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
26 05 33 13-0110	EA	2-1/2" Rigid Galvanized Steel (RGS) 15" Large Radius Elbow	164.39	46.22
		For Work In Restricted Working Space, Add	*27.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
26 05 33 13-0111	EA	3" Rigid Galvanized Steel (RGS) 15" Large Radius Elbow	221.10	62.96
		For Work In Restricted Working Space, Add	*37.78*	
		For Elevated Installation >10' To 15' Above Floor, Add	*12.59*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.48*	
		For Elevated Installation >25' To 30' Above Floor, Add	*44.08*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.37*	
		For Elevated Installation >35' To 40' Above Floor, Add	*62.97*	
		For Elevated Installation >40' Above Floor, Add	*69.26*	
26 05 33 13-0112		**Rigid Galvanized Steel (RGS) 18" Large Radius Elbow** *(26 05 33 13-0060)*		
		See CSI section 26 05 33 13-2319 for conduit field bending.		
26 05 33 13-0113	EA	1" Rigid Galvanized Steel (RGS) 18" Large Radius Elbow	86.32	25.45
		For Work In Restricted Working Space, Add	*15.27*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
26 05 33 13-0114	EA	1-1/4" Rigid Galvanized Steel (RGS) 18" Large Radius Elbow	99.09	29.47
		For Work In Restricted Working Space, Add	*17.68*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
26 05 33 13-0115	EA	1-1/2" Rigid Galvanized Steel (RGS) 18" Large Radius Elbow	113.85	33.49
		For Work In Restricted Working Space, Add	*20.09*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	
26 05 33 13-0116	EA	2" Rigid Galvanized Steel (RGS) 18" Large Radius Elbow	133.49	36.84
		For Work In Restricted Working Space, Add	*22.10*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
26 05 33 13-0117	EA	2-1/2" Rigid Galvanized Steel (RGS) 18" Large Radius Elbow	173.92	46.22
		For Work In Restricted Working Space, Add	*27.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
26 05 33 13-0118	EA	3" Rigid Galvanized Steel (RGS) 18" Large Radius Elbow	228.79	62.96
		For Work In Restricted Working Space, Add	*37.78*	
		For Elevated Installation >10' To 15' Above Floor, Add	*12.59*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.48*	
		For Elevated Installation >25' To 30' Above Floor, Add	*44.08*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.37*	
		For Elevated Installation >35' To 40' Above Floor, Add	*62.97*	
		For Elevated Installation >40' Above Floor, Add	*69.26*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0119	EA	3-1/2" Rigid Galvanized Steel (RGS) 18" Large Radius Elbow	287.40	71.00
		For Work In Restricted Working Space, Add	*42.60*	
		For Elevated Installation >10' To 15' Above Floor, Add	*14.20*	
		For Elevated Installation >15' To 20' Above Floor, Add	*28.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*35.50*	
		For Elevated Installation >25' To 30' Above Floor, Add	*49.70*	
		For Elevated Installation >30' To 35' Above Floor, Add	*56.80*	
		For Elevated Installation >35' To 40' Above Floor, Add	*71.01*	
		For Elevated Installation >40' Above Floor, Add	*78.11*	
26 05 33 13-0120	EA	4" Rigid Galvanized Steel (RGS) 18" Large Radius Elbow	347.33	92.43
		For Work In Restricted Working Space, Add	*55.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*18.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*73.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.44*	
		For Elevated Installation >40' Above Floor, Add	*101.68*	

26 05 33 13-0121 Rigid Galvanized Steel (RGS) 24" Large Radius Elbow *(26 05 33 13-0060)*

See CSI section 26 05 33 13-2319 for conduit field bending.

26 05 33 13-0122	EA	1" Rigid Galvanized Steel (RGS) 24" Large Radius Elbow	97.83	25.45
		For Work In Restricted Working Space, Add	*15.27*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
26 05 33 13-0123	EA	1-1/4" Rigid Galvanized Steel (RGS) 24" Large Radius Elbow	110.38	29.47
		For Work In Restricted Working Space, Add	*17.68*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
26 05 33 13-0124	EA	1-1/2" Rigid Galvanized Steel (RGS) 24" Large Radius Elbow	122.31	33.49
		For Work In Restricted Working Space, Add	*20.09*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	
26 05 33 13-0125	EA	2" Rigid Galvanized Steel (RGS) 24" Large Radius Elbow	145.96	36.84
		For Work In Restricted Working Space, Add	*22.10*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
26 05 33 13-0126	EA	2-1/2" Rigid Galvanized Steel (RGS) 24" Large Radius Elbow	190.93	46.22
		For Work In Restricted Working Space, Add	*27.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
26 05 33 13-0127	EA	3" Rigid Galvanized Steel (RGS) 24" Large Radius Elbow	255.45	62.96
		For Work In Restricted Working Space, Add	*37.78*	
		For Elevated Installation >10' To 15' Above Floor, Add	*12.59*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.48*	
		For Elevated Installation >25' To 30' Above Floor, Add	*44.08*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.37*	
		For Elevated Installation >35' To 40' Above Floor, Add	*62.97*	
		For Elevated Installation >40' Above Floor, Add	*69.26*	
26 05 33 13-0128	EA	3-1/2" Rigid Galvanized Steel (RGS) 24" Large Radius Elbow	313.32	71.00
		For Work In Restricted Working Space, Add	*42.60*	
		For Elevated Installation >10' To 15' Above Floor, Add	*14.20*	
		For Elevated Installation >15' To 20' Above Floor, Add	*28.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*35.50*	
		For Elevated Installation >25' To 30' Above Floor, Add	*49.70*	
		For Elevated Installation >30' To 35' Above Floor, Add	*56.80*	
		For Elevated Installation >35' To 40' Above Floor, Add	*71.01*	
		For Elevated Installation >40' Above Floor, Add	*78.11*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0129	EA	4" Rigid Galvanized Steel (RGS) 24" Large Radius Elbow	368.00	92.43
		For Work In Restricted Working Space, Add	*55.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*18.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*73.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.44*	
		For Elevated Installation >40' Above Floor, Add	*101.68*	
26 05 33 13-0130		**Rigid Galvanized Steel (RGS) 30" Large Radius Elbow** *(26 05 33 13-0060)*		
		See CSI section 26 05 33 13-2319 for conduit field bending.		
26 05 33 13-0131	EA	1" Rigid Galvanized Steel (RGS) 30" Large Radius Elbow	97.13	25.45
		For Work In Restricted Working Space, Add	*15.27*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
26 05 33 13-0132	EA	1-1/4" Rigid Galvanized Steel (RGS) 30" Large Radius Elbow	118.78	29.47
		For Work In Restricted Working Space, Add	*17.68*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
26 05 33 13-0133	EA	1-1/2" Rigid Galvanized Steel (RGS) 30" Large Radius Elbow	131.41	33.49
		For Work In Restricted Working Space, Add	*20.09*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	
26 05 33 13-0134	EA	2" Rigid Galvanized Steel (RGS) 30" Large Radius Elbow	157.85	36.84
		For Work In Restricted Working Space, Add	*22.10*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
26 05 33 13-0135	EA	2-1/2" Rigid Galvanized Steel (RGS) 30" Large Radius Elbow	207.25	46.22
		For Work In Restricted Working Space, Add	*27.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
26 05 33 13-0136	EA	3" Rigid Galvanized Steel (RGS) 30" Large Radius Elbow	276.51	62.96
		For Work In Restricted Working Space, Add	*37.78*	
		For Elevated Installation >10' To 15' Above Floor, Add	*12.59*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.48*	
		For Elevated Installation >25' To 30' Above Floor, Add	*44.08*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.37*	
		For Elevated Installation >35' To 40' Above Floor, Add	*62.97*	
		For Elevated Installation >40' Above Floor, Add	*69.26*	
26 05 33 13-0137	EA	3-1/2" Rigid Galvanized Steel (RGS) 30" Large Radius Elbow	338.95	71.00
		For Work In Restricted Working Space, Add	*42.60*	
		For Elevated Installation >10' To 15' Above Floor, Add	*14.20*	
		For Elevated Installation >15' To 20' Above Floor, Add	*28.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*35.50*	
		For Elevated Installation >25' To 30' Above Floor, Add	*49.70*	
		For Elevated Installation >30' To 35' Above Floor, Add	*56.80*	
		For Elevated Installation >35' To 40' Above Floor, Add	*71.01*	
		For Elevated Installation >40' Above Floor, Add	*78.11*	
26 05 33 13-0138	EA	4" Rigid Galvanized Steel (RGS) 30" Large Radius Elbow	405.93	92.43
		For Work In Restricted Working Space, Add	*55.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*18.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*73.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.44*	
		For Elevated Installation >40' Above Floor, Add	*101.68*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0139	EA	5" Rigid Galvanized Steel (RGS) 30" Large Radius Elbow	585.35	150.71
		For Work In Restricted Working Space, Add	*90.43*	
		For Elevated Installation >10' To 15' Above Floor, Add	*30.14*	
		For Elevated Installation >15' To 20' Above Floor, Add	*60.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*75.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*105.50*	
		For Elevated Installation >30' To 35' Above Floor, Add	*120.57*	
		For Elevated Installation >35' To 40' Above Floor, Add	*150.71*	
		For Elevated Installation >40' Above Floor, Add	*165.78*	

26 05 33 13-0140 Rigid Galvanized Steel (RGS) 36" Large Radius Elbow *(26 05 33 13-0060)*

See CSI section 26 05 33 13-2319 for conduit field bending.

26 05 33 13-0141	EA	1" Rigid Galvanized Steel (RGS) 36" Large Radius Elbow	103.28	25.45
		For Work In Restricted Working Space, Add	*15.27*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
26 05 33 13-0142	EA	1-1/4" Rigid Galvanized Steel (RGS) 36" Large Radius Elbow	122.92	29.47
		For Work In Restricted Working Space, Add	*17.68*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
26 05 33 13-0143	EA	1-1/2" Rigid Galvanized Steel (RGS) 36" Large Radius Elbow	147.34	33.49
		For Work In Restricted Working Space, Add	*20.09*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	
26 05 33 13-0144	EA	2" Rigid Galvanized Steel (RGS) 36" Large Radius Elbow	167.13	36.84
		For Work In Restricted Working Space, Add	*22.10*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
26 05 33 13-0145	EA	2-1/2" Rigid Galvanized Steel (RGS) 36" Large Radius Elbow	226.60	46.22
		For Work In Restricted Working Space, Add	*27.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
26 05 33 13-0146	EA	3" Rigid Galvanized Steel (RGS) 36" Large Radius Elbow	294.52	62.96
		For Work In Restricted Working Space, Add	*37.78*	
		For Elevated Installation >10' To 15' Above Floor, Add	*12.59*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.48*	
		For Elevated Installation >25' To 30' Above Floor, Add	*44.08*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.37*	
		For Elevated Installation >35' To 40' Above Floor, Add	*62.97*	
		For Elevated Installation >40' Above Floor, Add	*69.26*	
26 05 33 13-0147	EA	3-1/2" Rigid Galvanized Steel (RGS) 36" Large Radius Elbow	372.05	71.00
		For Work In Restricted Working Space, Add	*42.60*	
		For Elevated Installation >10' To 15' Above Floor, Add	*14.20*	
		For Elevated Installation >15' To 20' Above Floor, Add	*28.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*35.50*	
		For Elevated Installation >25' To 30' Above Floor, Add	*49.70*	
		For Elevated Installation >30' To 35' Above Floor, Add	*56.80*	
		For Elevated Installation >35' To 40' Above Floor, Add	*71.01*	
		For Elevated Installation >40' Above Floor, Add	*78.11*	
26 05 33 13-0148	EA	4" Rigid Galvanized Steel (RGS) 36" Large Radius Elbow	423.78	92.43
		For Work In Restricted Working Space, Add	*55.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*18.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*73.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.44*	
		For Elevated Installation >40' Above Floor, Add	*101.68*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0149	EA	5" Rigid Galvanized Steel (RGS) 36" Large Radius Elbow	730.96	150.71
		For Work In Restricted Working Space, Add	*90.43*	
		For Elevated Installation >10' To 15' Above Floor, Add	*30.14*	
		For Elevated Installation >15' To 20' Above Floor, Add	*60.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*75.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*105.50*	
		For Elevated Installation >30' To 35' Above Floor, Add	*120.57*	
		For Elevated Installation >35' To 40' Above Floor, Add	*150.71*	
		For Elevated Installation >40' Above Floor, Add	*165.78*	
26 05 33 13-0150	EA	6" Rigid Galvanized Steel (RGS) 36" Large Radius Elbow	924.71	226.41
		For Work In Restricted Working Space, Add	*135.84*	
		For Elevated Installation >10' To 15' Above Floor, Add	*45.28*	
		For Elevated Installation >15' To 20' Above Floor, Add	*90.56*	
		For Elevated Installation >20' To 25' Above Floor, Add	*113.20*	
		For Elevated Installation >25' To 30' Above Floor, Add	*158.48*	
		For Elevated Installation >30' To 35' Above Floor, Add	*181.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*226.41*	
		For Elevated Installation >40' Above Floor, Add	*249.05*	

26 05 33 13-0151 Rigid Galvanized Steel (RGS) 42" Large Radius Elbow *(26 05 33 13-0060)*

See CSI section 26 05 33 13-2319 for conduit field bending.

26 05 33 13-0152	EA	1" Rigid Galvanized Steel (RGS) 42" Large Radius Elbow	112.29	25.45
		For Work In Restricted Working Space, Add	*15.27*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
26 05 33 13-0153	EA	1-1/4" Rigid Galvanized Steel (RGS) 42" Large Radius Elbow	133.92	29.47
		For Work In Restricted Working Space, Add	*17.68*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
26 05 33 13-0154	EA	1-1/2" Rigid Galvanized Steel (RGS) 42" Large Radius Elbow	159.04	33.49
		For Work In Restricted Working Space, Add	*20.09*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	
26 05 33 13-0155	EA	2" Rigid Galvanized Steel (RGS) 42" Large Radius Elbow	179.36	36.84
		For Work In Restricted Working Space, Add	*22.10*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
26 05 33 13-0156	EA	2-1/2" Rigid Galvanized Steel (RGS) 42" Large Radius Elbow	241.41	46.22
		For Work In Restricted Working Space, Add	*27.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.98*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
26 05 33 13-0157	EA	3" Rigid Galvanized Steel (RGS) 42" Large Radius Elbow	320.90	62.96
		For Work In Restricted Working Space, Add	*37.78*	
		For Elevated Installation >10' To 15' Above Floor, Add	*12.59*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.48*	
		For Elevated Installation >25' To 30' Above Floor, Add	*44.08*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.37*	
		For Elevated Installation >35' To 40' Above Floor, Add	*62.97*	
		For Elevated Installation >40' Above Floor, Add	*69.26*	
26 05 33 13-0158	EA	3-1/2" Rigid Galvanized Steel (RGS) 42" Large Radius Elbow	398.51	71.00
		For Work In Restricted Working Space, Add	*42.60*	
		For Elevated Installation >10' To 15' Above Floor, Add	*14.20*	
		For Elevated Installation >15' To 20' Above Floor, Add	*28.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*35.50*	
		For Elevated Installation >25' To 30' Above Floor, Add	*49.70*	
		For Elevated Installation >30' To 35' Above Floor, Add	*56.80*	
		For Elevated Installation >35' To 40' Above Floor, Add	*71.01*	
		For Elevated Installation >40' Above Floor, Add	*78.11*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0159	EA	4" Rigid Galvanized Steel (RGS) 42" Large Radius Elbow	499.92	92.43
		For Work In Restricted Working Space, Add	*55.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*18.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*73.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.44*	
		For Elevated Installation >40' Above Floor, Add	*101.68*	
26 05 33 13-0160	EA	5" Rigid Galvanized Steel (RGS) 42" Large Radius Elbow	836.00	150.71
		For Work In Restricted Working Space, Add	*90.43*	
		For Elevated Installation >10' To 15' Above Floor, Add	*30.14*	
		For Elevated Installation >15' To 20' Above Floor, Add	*60.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*75.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*105.50*	
		For Elevated Installation >30' To 35' Above Floor, Add	*120.57*	
		For Elevated Installation >35' To 40' Above Floor, Add	*150.71*	
		For Elevated Installation >40' Above Floor, Add	*165.78*	
26 05 33 13-0161	EA	6" Rigid Galvanized Steel (RGS) 42" Large Radius Elbow	1,015.67	226.41
		For Work In Restricted Working Space, Add	*135.84*	
		For Elevated Installation >10' To 15' Above Floor, Add	*45.28*	
		For Elevated Installation >15' To 20' Above Floor, Add	*90.56*	
		For Elevated Installation >20' To 25' Above Floor, Add	*113.20*	
		For Elevated Installation >25' To 30' Above Floor, Add	*158.48*	
		For Elevated Installation >30' To 35' Above Floor, Add	*181.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*226.41*	
		For Elevated Installation >40' Above Floor, Add	*249.05*	

26 05 33 13-0162 Rigid Galvanized Steel (RGS) 48" Large Radius Elbow *(26 05 33 13-0060)*

See CSI section 26 05 33 13-2319 for conduit field bending.

26 05 33 13-0163	EA	1" Rigid Galvanized Steel (RGS) 48" Large Radius Elbow	119.79	25.45
		For Work In Restricted Working Space, Add	*15.27*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
26 05 33 13-0164	EA	1-1/4" Rigid Galvanized Steel (RGS) 48" Large Radius Elbow	142.40	29.47
		For Work In Restricted Working Space, Add	*17.68*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
26 05 33 13-0165	EA	1-1/2" Rigid Galvanized Steel (RGS) 48" Large Radius Elbow	166.43	33.49
		For Work In Restricted Working Space, Add	*20.09*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	
26 05 33 13-0166	EA	2" Rigid Galvanized Steel (RGS) 48" Large Radius Elbow	202.20	36.84
		For Work In Restricted Working Space, Add	*22.10*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
26 05 33 13-0167	EA	2-1/2" Rigid Galvanized Steel (RGS) 48" Large Radius Elbow	268.71	46.22
		For Work In Restricted Working Space, Add	*27.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.98*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
26 05 33 13-0168	EA	3" Rigid Galvanized Steel (RGS) 48" Large Radius Elbow	347.49	62.96
		For Work In Restricted Working Space, Add	*37.78*	
		For Elevated Installation >10' To 15' Above Floor, Add	*12.59*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.48*	
		For Elevated Installation >25' To 30' Above Floor, Add	*44.08*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.37*	
		For Elevated Installation >35' To 40' Above Floor, Add	*62.97*	
		For Elevated Installation >40' Above Floor, Add	*69.26*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0169	EA	3-1/2" Rigid Galvanized Steel (RGS) 48" Large Radius Elbow	431.78	71.00
		For Work In Restricted Working Space, Add	*42.60*	
		For Elevated Installation >10' To 15' Above Floor, Add	*14.20*	
		For Elevated Installation >15' To 20' Above Floor, Add	*28.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*35.50*	
		For Elevated Installation >25' To 30' Above Floor, Add	*49.70*	
		For Elevated Installation >30' To 35' Above Floor, Add	*56.80*	
		For Elevated Installation >35' To 40' Above Floor, Add	*71.01*	
		For Elevated Installation >40' Above Floor, Add	*78.11*	
26 05 33 13-0170	EA	4" Rigid Galvanized Steel (RGS) 48" Large Radius Elbow	540.34	92.43
		For Work In Restricted Working Space, Add	*55.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*18.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*73.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.44*	
		For Elevated Installation >40' Above Floor, Add	*101.68*	
26 05 33 13-0171	EA	5" Rigid Galvanized Steel (RGS) 48" Large Radius Elbow	868.89	150.71
		For Work In Restricted Working Space, Add	*90.43*	
		For Elevated Installation >10' To 15' Above Floor, Add	*30.14*	
		For Elevated Installation >15' To 20' Above Floor, Add	*60.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*75.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*105.50*	
		For Elevated Installation >30' To 35' Above Floor, Add	*120.57*	
		For Elevated Installation >35' To 40' Above Floor, Add	*150.71*	
		For Elevated Installation >40' Above Floor, Add	*165.78*	
26 05 33 13-0172	EA	6" Rigid Galvanized Steel (RGS) 48" Large Radius Elbow	1,034.07	226.41
		For Work In Restricted Working Space, Add	*135.84*	
		For Elevated Installation >10' To 15' Above Floor, Add	*45.28*	
		For Elevated Installation >15' To 20' Above Floor, Add	*90.56*	
		For Elevated Installation >20' To 25' Above Floor, Add	*113.20*	
		For Elevated Installation >25' To 30' Above Floor, Add	*158.48*	
		For Elevated Installation >30' To 35' Above Floor, Add	*181.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*226.41*	
		For Elevated Installation >40' Above Floor, Add	*249.05*	

26 05 33 13-0173 Rigid Galvanized Steel (RGS) Plastic Insulating Bushing *(26 05 33 13-0060)*

26 05 33 13-0174	EA	1/2" Rigid Galvanized Steel (RGS) Plastic Insulating Bushing	13.55	6.57
		For Work In Restricted Working Space, Add	*3.94*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.31*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.63*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.29*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.60*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.26*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.57*	
		For Elevated Installation >40' Above Floor, Add	*7.23*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.94*	
26 05 33 13-0175	EA	3/4" Rigid Galvanized Steel (RGS) Plastic Insulating Bushing	14.56	7.01
		For Work In Restricted Working Space, Add	*4.21*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.40*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.80*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.51*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.91*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.01*	
		For Elevated Installation >40' Above Floor, Add	*7.71*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.21*	
26 05 33 13-0176	EA	1" Rigid Galvanized Steel (RGS) Plastic Insulating Bushing	16.57	7.88
		For Work In Restricted Working Space, Add	*4.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.94*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.52*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.88*	
		For Elevated Installation >40' Above Floor, Add	*8.67*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.73*	
26 05 33 13-0177	EA	1-1/4" Rigid Galvanized Steel (RGS) Plastic Insulating Bushing	18.70	8.76
		For Work In Restricted Working Space, Add	*5.26*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.75*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.50*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.13*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.01*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.76*	
		For Elevated Installation >40' Above Floor, Add	*9.64*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.26*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0178	EA	1-1/2" Rigid Galvanized Steel (RGS) Plastic Insulating Bushing	23.51	10.95
		For Work In Restricted Working Space, Add	*6.57*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.19*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.38*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.48*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.67*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.76*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.95*	
		For Elevated Installation >40' Above Floor, Add	*12.05*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.57*	
26 05 33 13-0179	EA	2" Rigid Galvanized Steel (RGS) Plastic Insulating Bushing	29.27	13.14
		For Work In Restricted Working Space, Add	*7.88*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.63*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.26*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.57*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.20*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.51*	
		For Elevated Installation >35' To 40' Above Floor, Add	*13.14*	
		For Elevated Installation >40' Above Floor, Add	*14.45*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.88*	
26 05 33 13-0180	EA	2-1/2" Rigid Galvanized Steel (RGS) Plastic Insulating Bushing	37.25	15.33
		For Work In Restricted Working Space, Add	*9.20*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.07*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.13*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.66*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.73*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.26*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.33*	
		For Elevated Installation >40' Above Floor, Add	*16.86*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.20*	
26 05 33 13-0181	EA	3" Rigid Galvanized Steel (RGS) Plastic Insulating Bushing	42.00	17.52
		For Work In Restricted Working Space, Add	*10.51*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.50*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.01*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.76*	
		For Elevated Installation >25' To 30' Above Floor, Add	*12.26*	
		For Elevated Installation >30' To 35' Above Floor, Add	*14.02*	
		For Elevated Installation >35' To 40' Above Floor, Add	*17.52*	
		For Elevated Installation >40' Above Floor, Add	*19.27*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.51*	
26 05 33 13-0182	EA	3-1/2" Rigid Galvanized Steel (RGS) Plastic Insulating Bushing	49.08	16.49
		For Work In Restricted Working Space, Add	*11.83*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.94*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.88*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.86*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.80*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.77*	
		For Elevated Installation >35' To 40' Above Floor, Add	*19.71*	
		For Elevated Installation >40' Above Floor, Add	*21.68*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.83*	
26 05 33 13-0183	EA	4" Rigid Galvanized Steel (RGS) Plastic Insulating Bushing	54.45	21.90
		For Work In Restricted Working Space, Add	*13.14*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.38*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.76*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.95*	
		For Elevated Installation >25' To 30' Above Floor, Add	*15.33*	
		For Elevated Installation >30' To 35' Above Floor, Add	*17.52*	
		For Elevated Installation >35' To 40' Above Floor, Add	*21.90*	
		For Elevated Installation >40' Above Floor, Add	*24.09*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.14*	
26 05 33 13-0184	EA	5" Rigid Galvanized Steel (RGS) Plastic Insulating Bushing	66.32	24.09
		For Work In Restricted Working Space, Add	*14.45*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.82*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.63*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.04*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.86*	
		For Elevated Installation >30' To 35' Above Floor, Add	*19.27*	
		For Elevated Installation >35' To 40' Above Floor, Add	*24.09*	
		For Elevated Installation >40' Above Floor, Add	*26.49*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.45*	
26 05 33 13-0185	EA	6" Rigid Galvanized Steel (RGS) Plastic Insulating Bushing	98.50	26.28
		For Work In Restricted Working Space, Add	*15.77*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.26*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.51*	
		For Elevated Installation >20' To 25' Above Floor, Add	*13.14*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.39*	
		For Elevated Installation >30' To 35' Above Floor, Add	*21.02*	
		For Elevated Installation >35' To 40' Above Floor, Add	*26.28*	
		For Elevated Installation >40' Above Floor, Add	*28.90*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.77*	

26 05 33 13-0186 Rigid Galvanized Steel (RGS) Steel Bushing *(26 05 33 13-0060)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0187	EA	1/2" Rigid Galvanized Steel (RGS) Steel Bushing	16.47	7.73
		For Work In Restricted Working Space, Add	*4.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.87*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.41*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.73*	
		For Elevated Installation >40' Above Floor, Add	*8.50*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.64*	
26 05 33 13-0188	EA	3/4" Rigid Galvanized Steel (RGS) Steel Bushing	17.96	8.24
		For Work In Restricted Working Space, Add	*4.95*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.65*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.12*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.77*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.60*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.25*	
		For Elevated Installation >40' Above Floor, Add	*9.07*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.95*	
26 05 33 13-0189	EA	1" Rigid Galvanized Steel (RGS) Steel Bushing	21.11	9.28
		For Work In Restricted Working Space, Add	*5.57*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.86*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.71*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.64*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.49*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.42*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.28*	
		For Elevated Installation >40' Above Floor, Add	*10.20*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.57*	
26 05 33 13-0190	EA	1-1/4" Rigid Galvanized Steel (RGS) Steel Bushing	23.77	10.31
		For Work In Restricted Working Space, Add	*6.18*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.06*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.12*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.15*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.21*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.24*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.31*	
		For Elevated Installation >40' Above Floor, Add	*11.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.18*	
26 05 33 13-0191	EA	1-1/2" Rigid Galvanized Steel (RGS) Steel Bushing	30.44	12.89
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.88*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	
26 05 33 13-0192	EA	2" Rigid Galvanized Steel (RGS) Steel Bushing	35.94	15.46
		For Work In Restricted Working Space, Add	*9.27*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.46*	
		For Elevated Installation >40' Above Floor, Add	*17.00*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.27*	
26 05 33 13-0193	EA	2-1/2" Rigid Galvanized Steel (RGS) Steel Bushing	51.87	18.03
		For Work In Restricted Working Space, Add	*10.82*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.61*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.21*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*12.62*	
		For Elevated Installation >30' To 35' Above Floor, Add	*14.43*	
		For Elevated Installation >35' To 40' Above Floor, Add	*18.04*	
		For Elevated Installation >40' Above Floor, Add	*19.84*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.82*	
26 05 33 13-0194	EA	3" Rigid Galvanized Steel (RGS) Steel Bushing	61.95	20.61
		For Work In Restricted Working Space, Add	*12.37*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.12*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.24*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.31*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.43*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.49*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.61*	
		For Elevated Installation >40' Above Floor, Add	*22.67*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*12.37*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0195	EA	3-1/2" Rigid Galvanized Steel (RGS) Steel Bushing	94.79	23.18
		For Work In Restricted Working Space, Add	*13.91*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.64*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.60*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.55*	
		For Elevated Installation >35' To 40' Above Floor, Add	*23.19*	
		For Elevated Installation >40' Above Floor, Add	*25.51*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.91*	
26 05 33 13-0196	EA	4" Rigid Galvanized Steel (RGS) Steel Bushing	130.03	25.76
		For Work In Restricted Working Space, Add	*15.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.76*	
		For Elevated Installation >40' Above Floor, Add	*28.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.46*	
26 05 33 13-0197	EA	5" Rigid Galvanized Steel (RGS) Steel Bushing	175.76	28.34
		For Work In Restricted Working Space, Add	*17.00*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.67*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.33*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.17*	
		For Elevated Installation >25' To 30' Above Floor, Add	*19.83*	
		For Elevated Installation >30' To 35' Above Floor, Add	*22.67*	
		For Elevated Installation >35' To 40' Above Floor, Add	*28.34*	
		For Elevated Installation >40' Above Floor, Add	*31.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*17.00*	
26 05 33 13-0198	EA	6" Rigid Galvanized Steel (RGS) Steel Bushing	262.83	30.91
		For Work In Restricted Working Space, Add	*18.55*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.18*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.46*	
		For Elevated Installation >25' To 30' Above Floor, Add	*21.64*	
		For Elevated Installation >30' To 35' Above Floor, Add	*24.73*	
		For Elevated Installation >35' To 40' Above Floor, Add	*30.92*	
		For Elevated Installation >40' Above Floor, Add	*34.01*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*18.55*	
26 05 33 13-0199		**Rigid Galvanized Steel (RGS) Steel Insulated Bushing** *(26 05 33 13-0060)*		
26 05 33 13-0200	EA	1/2" Rigid Galvanized Steel (RGS) Steel Insulated Bushing	17.66	7.73
		For Work In Restricted Working Space, Add	*4.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.87*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.41*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.73*	
		For Elevated Installation >40' Above Floor, Add	*8.50*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.64*	
26 05 33 13-0201	EA	3/4" Rigid Galvanized Steel (RGS) Steel Insulated Bushing	19.76	8.24
		For Work In Restricted Working Space, Add	*4.95*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.65*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.12*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.77*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.60*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.25*	
		For Elevated Installation >40' Above Floor, Add	*9.07*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.95*	
26 05 33 13-0202	EA	1" Rigid Galvanized Steel (RGS) Steel Insulated Bushing	23.37	9.28
		For Work In Restricted Working Space, Add	*5.57*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.86*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.71*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.64*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.49*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.42*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.28*	
		For Elevated Installation >40' Above Floor, Add	*10.20*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.57*	
26 05 33 13-0203	EA	1-1/4" Rigid Galvanized Steel (RGS) Steel Insulated Bushing	27.59	10.31
		For Work In Restricted Working Space, Add	*6.18*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.06*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.12*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.15*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.21*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.24*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.31*	
		For Elevated Installation >40' Above Floor, Add	*11.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.18*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0204	EA	1-1/2" Rigid Galvanized Steel (RGS) Steel Insulated Bushing	34.41	12.89
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.88*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	
26 05 33 13-0205	EA	2" Rigid Galvanized Steel (RGS) Steel Insulated Bushing	42.99	15.46
		For Work In Restricted Working Space, Add	*9.27*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.46*	
		For Elevated Installation >40' Above Floor, Add	*17.00*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.27*	
26 05 33 13-0206	EA	2-1/2" Rigid Galvanized Steel (RGS) Steel Insulated Bushing	61.43	18.03
		For Work In Restricted Working Space, Add	*10.82*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.61*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.21*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*12.62*	
		For Elevated Installation >30' To 35' Above Floor, Add	*14.43*	
		For Elevated Installation >35' To 40' Above Floor, Add	*18.04*	
		For Elevated Installation >40' Above Floor, Add	*19.84*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.82*	
26 05 33 13-0207	EA	3" Rigid Galvanized Steel (RGS) Steel Insulated Bushing	73.16	20.61
		For Work In Restricted Working Space, Add	*12.37*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.12*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.24*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.31*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.43*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.49*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.61*	
		For Elevated Installation >40' Above Floor, Add	*22.67*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*12.37*	
26 05 33 13-0208	EA	3-1/2" Rigid Galvanized Steel (RGS) Steel Insulated Bushing	96.88	23.18
		For Work In Restricted Working Space, Add	*13.91*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.64*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.60*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.55*	
		For Elevated Installation >35' To 40' Above Floor, Add	*23.19*	
		For Elevated Installation >40' Above Floor, Add	*25.51*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.91*	
26 05 33 13-0209	EA	4" Rigid Galvanized Steel (RGS) Steel Insulated Bushing	139.38	25.76
		For Work In Restricted Working Space, Add	*15.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.76*	
		For Elevated Installation >40' Above Floor, Add	*28.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.46*	
26 05 33 13-0210	EA	5" Rigid Galvanized Steel (RGS) Steel Insulated Bushing	185.94	28.34
		For Work In Restricted Working Space, Add	*17.00*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.67*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.33*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.17*	
		For Elevated Installation >25' To 30' Above Floor, Add	*19.83*	
		For Elevated Installation >30' To 35' Above Floor, Add	*22.67*	
		For Elevated Installation >35' To 40' Above Floor, Add	*28.34*	
		For Elevated Installation >40' Above Floor, Add	*31.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*17.00*	
26 05 33 13-0211	EA	6" Rigid Galvanized Steel (RGS) Steel Insulated Bushing	266.41	30.91
		For Work In Restricted Working Space, Add	*18.55*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.18*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.46*	
		For Elevated Installation >25' To 30' Above Floor, Add	*21.64*	
		For Elevated Installation >30' To 35' Above Floor, Add	*24.73*	
		For Elevated Installation >35' To 40' Above Floor, Add	*30.92*	
		For Elevated Installation >40' Above Floor, Add	*34.01*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*18.55*	

26 05 33 13-0212 Rigid Galvanized Steel (RGS) Steel Insulated Grounding Bushing *(26 05 33 13-0060)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0213	EA	1/2" Rigid Galvanized Steel (RGS) Steel Insulated Grounding Bushing	27.42	9.28
		For Work In Restricted Working Space, Add	*5.57*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.86*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.71*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.64*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.49*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.42*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.28*	
		For Elevated Installation >40' Above Floor, Add	*10.20*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.57*	
26 05 33 13-0214	EA	3/4" Rigid Galvanized Steel (RGS) Steel Insulated Grounding Bushing	30.74	10.31
		For Work In Restricted Working Space, Add	*6.18*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.06*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.12*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.15*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.21*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.24*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.31*	
		For Elevated Installation >40' Above Floor, Add	*11.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.18*	
26 05 33 13-0215	EA	1" Rigid Galvanized Steel (RGS) Steel Insulated Grounding Bushing	35.30	11.33
		For Work In Restricted Working Space, Add	*6.80*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.27*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.53*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.67*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.93*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.07*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.34*	
		For Elevated Installation >40' Above Floor, Add	*12.47*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 05 33 13-0216	EA	1-1/4" Rigid Galvanized Steel (RGS) Steel Insulated Grounding Bushing	42.10	12.89
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.88*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	
26 05 33 13-0217	EA	1-1/2" Rigid Galvanized Steel (RGS) Steel Insulated Grounding Bushing	50.81	15.97
		For Work In Restricted Working Space, Add	*9.59*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.20*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.39*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.99*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.18*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.78*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.98*	
		For Elevated Installation >40' Above Floor, Add	*17.57*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.59*	
26 05 33 13-0218	EA	2" Rigid Galvanized Steel (RGS) Steel Insulated Grounding Bushing	64.32	19.06
		For Work In Restricted Working Space, Add	*11.44*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.81*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.62*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.53*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.34*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.25*	
		For Elevated Installation >35' To 40' Above Floor, Add	*19.06*	
		For Elevated Installation >40' Above Floor, Add	*20.97*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.44*	
26 05 33 13-0219	EA	2-1/2" Rigid Galvanized Steel (RGS) Steel Insulated Grounding Bushing	87.11	22.16
		For Work In Restricted Working Space, Add	*13.29*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.43*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.86*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.08*	
		For Elevated Installation >25' To 30' Above Floor, Add	*15.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*17.72*	
		For Elevated Installation >35' To 40' Above Floor, Add	*22.16*	
		For Elevated Installation >40' Above Floor, Add	*24.37*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.29*	
26 05 33 13-0220	EA	3" Rigid Galvanized Steel (RGS) Steel Insulated Grounding Bushing	95.68	25.76
		For Work In Restricted Working Space, Add	*15.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.76*	
		For Elevated Installation >40' Above Floor, Add	*28.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.46*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0221	EA	3-1/2" Rigid Galvanized Steel (RGS) Steel Insulated Grounding Bushing	108.28	28.86
		For Work In Restricted Working Space, Add	*17.31*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.77*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.54*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.43*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.20*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.08*	
		For Elevated Installation >35' To 40' Above Floor, Add	*28.86*	
		For Elevated Installation >40' Above Floor, Add	*31.74*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*17.31*	
26 05 33 13-0222	EA	4" Rigid Galvanized Steel (RGS) Steel Insulated Grounding Bushing	141.30	31.95
		For Work In Restricted Working Space, Add	*19.17*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.39*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.78*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.97*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.36*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.56*	
		For Elevated Installation >35' To 40' Above Floor, Add	*31.95*	
		For Elevated Installation >40' Above Floor, Add	*35.14*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*19.17*	
26 05 33 13-0223	EA	5" Rigid Galvanized Steel (RGS) Steel Insulated Grounding Bushing	203.32	35.04
		For Work In Restricted Working Space, Add	*21.02*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.01*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.01*	
		For Elevated Installation >20' To 25' Above Floor, Add	*17.52*	
		For Elevated Installation >25' To 30' Above Floor, Add	*24.52*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.03*	
		For Elevated Installation >35' To 40' Above Floor, Add	*35.04*	
		For Elevated Installation >40' Above Floor, Add	*38.54*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.02*	
26 05 33 13-0224	EA	6" Rigid Galvanized Steel (RGS) Steel Insulated Grounding Bushing	282.69	38.65
		For Work In Restricted Working Space, Add	*23.19*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.73*	
		For Elevated Installation >15' To 20' Above Floor, Add	*15.46*	
		For Elevated Installation >20' To 25' Above Floor, Add	*19.32*	
		For Elevated Installation >25' To 30' Above Floor, Add	*27.05*	
		For Elevated Installation >30' To 35' Above Floor, Add	*30.92*	
		For Elevated Installation >35' To 40' Above Floor, Add	*38.65*	
		For Elevated Installation >40' Above Floor, Add	*42.51*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*23.19*	
26 05 33 13-0225		**Rigid Galvanized Steel (RGS) Box Connectors With Set Screw** *(26 05 33 13-0060)*		
26 05 33 13-0226	EA	1/2" Rigid Galvanized Steel (RGS) Box Connector With Set Screw	16.18	4.74
		For Work In Restricted Working Space, Add	*3.53*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.18*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.35*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.94*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.12*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.70*	
		For Elevated Installation >35' To 40' Above Floor, Add	*5.88*	
		For Elevated Installation >40' Above Floor, Add	*6.47*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.53*	
26 05 33 13-0227	EA	3/4" Rigid Galvanized Steel (RGS) Box Connector With Set Screw	19.76	5.46
		For Work In Restricted Working Space, Add	*4.09*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.36*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.72*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.41*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.77*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.45*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.81*	
		For Elevated Installation >40' Above Floor, Add	*7.49*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.09*	
26 05 33 13-0228	EA	1" Rigid Galvanized Steel (RGS) Box Connector With Set Screw	26.20	6.60
		For Work In Restricted Working Space, Add	*4.92*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.64*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.10*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.74*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.56*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.21*	
		For Elevated Installation >40' Above Floor, Add	*9.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.92*	
26 05 33 13-0229	EA	1-1/4" Rigid Galvanized Steel (RGS) Box Connector, Insulated With Set Screw	39.61	8.14
		For Work In Restricted Working Space, Add	*6.13*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.04*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.08*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.15*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.17*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.21*	
		For Elevated Installation >40' Above Floor, Add	*11.23*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.13*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0230	EA	1-1/2" Rigid Galvanized Steel (RGS) Box Connector, Insulated With Set Screw	53.69	10.92
		For Work In Restricted Working Space, Add	*8.20*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.73*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.47*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.83*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.57*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.93*	
		For Elevated Installation >35' To 40' Above Floor, Add	*13.67*	
		For Elevated Installation >40' Above Floor, Add	*15.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.20*	
26 05 33 13-0231	EA	2" Rigid Galvanized Steel (RGS) Box Connector, Insulated With Set Screw	92.63	16.38
		For Work In Restricted Working Space, Add	*12.28*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.24*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.33*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.38*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.47*	
		For Elevated Installation >40' Above Floor, Add	*22.52*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*12.28*	
26 05 33 13-0232	EA	2-1/2" Rigid Galvanized Steel (RGS) Box Connector, Insulated With Set Screw	173.25	18.14
		For Work In Restricted Working Space, Add	*13.60*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.53*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.07*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.34*	
		For Elevated Installation >25' To 30' Above Floor, Add	*15.87*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.14*	
		For Elevated Installation >35' To 40' Above Floor, Add	*22.67*	
		For Elevated Installation >40' Above Floor, Add	*24.94*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
26 05 33 13-0233	EA	3" Rigid Galvanized Steel (RGS) Box Connector, Insulated With Set Screw	206.32	21.95
		For Work In Restricted Working Space, Add	*16.48*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*13.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*19.22*	
		For Elevated Installation >30' To 35' Above Floor, Add	*21.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*27.46*	
		For Elevated Installation >40' Above Floor, Add	*30.21*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.48*	
26 05 33 13-0234	EA	3-1/2" Rigid Galvanized Steel (RGS) Box Connector, Insulated With Set Screw	280.19	27.52
		For Work In Restricted Working Space, Add	*20.63*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.88*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.75*	
		For Elevated Installation >20' To 25' Above Floor, Add	*17.19*	
		For Elevated Installation >25' To 30' Above Floor, Add	*24.06*	
		For Elevated Installation >30' To 35' Above Floor, Add	*27.50*	
		For Elevated Installation >35' To 40' Above Floor, Add	*34.38*	
		For Elevated Installation >40' Above Floor, Add	*37.81*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.63*	
26 05 33 13-0235	EA	4" Rigid Galvanized Steel (RGS) Box Connector, Insulated With Set Screw	327.82	32.98
		For Work In Restricted Working Space, Add	*24.74*	
		For Elevated Installation >10' To 15' Above Floor, Add	*8.25*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*20.61*	
		For Elevated Installation >25' To 30' Above Floor, Add	*28.86*	
		For Elevated Installation >30' To 35' Above Floor, Add	*32.98*	
		For Elevated Installation >35' To 40' Above Floor, Add	*41.23*	
		For Elevated Installation >40' Above Floor, Add	*45.35*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*24.74*	
26 05 33 13-0236	EA	5" Rigid Galvanized Steel (RGS) Box Connector, Insulated With Set Screw	587.58	36.69
		For Work In Restricted Working Space, Add	*27.48*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.16*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.32*	
		For Elevated Installation >20' To 25' Above Floor, Add	*22.90*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.06*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.64*	
		For Elevated Installation >35' To 40' Above Floor, Add	*45.81*	
		For Elevated Installation >40' Above Floor, Add	*50.39*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.48*	
26 05 33 13-0237	EA	6" Rigid Galvanized Steel (RGS) Box Connector, Insulated With Set Screw	703.41	41.22
		For Work In Restricted Working Space, Add	*30.91*	
		For Elevated Installation >10' To 15' Above Floor, Add	*10.30*	
		For Elevated Installation >15' To 20' Above Floor, Add	*20.61*	
		For Elevated Installation >20' To 25' Above Floor, Add	*25.76*	
		For Elevated Installation >25' To 30' Above Floor, Add	*36.06*	
		For Elevated Installation >30' To 35' Above Floor, Add	*41.21*	
		For Elevated Installation >35' To 40' Above Floor, Add	*51.52*	
		For Elevated Installation >40' Above Floor, Add	*56.67*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*30.91*	

26 05 33 13-0238 Rigid Galvanized Steel (RGS) Nipples *(26 05 33 13-0060)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0239	EA	1/2" x 2" Long, Rigid Galvanized Steel (RGS) Nipple	15.34	6.70
		For Work In Restricted Working Space, Add	*4.02*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.34*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.68*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.35*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.69*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.70*	
		For Elevated Installation >40' Above Floor, Add	*7.37*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.02*	
26 05 33 13-0240	EA	3/4" x 2" Long, Rigid Galvanized Steel (RGS) Nipple	17.64	7.73
		For Work In Restricted Working Space, Add	*4.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.86*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.41*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.73*	
		For Elevated Installation >40' Above Floor, Add	*8.50*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.64*	
26 05 33 13-0241	EA	1" x 2" Long, Rigid Galvanized Steel (RGS) Nipple	22.62	9.79
		For Work In Restricted Working Space, Add	*5.87*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.96*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.91*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.89*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.85*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.83*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.79*	
		For Elevated Installation >40' Above Floor, Add	*10.76*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.87*	
26 05 33 13-0242	EA	1-1/4" x 2" Long, Rigid Galvanized Steel (RGS) Nipple	26.55	11.33
		For Work In Restricted Working Space, Add	*6.80*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.27*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.53*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.67*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.93*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.07*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.34*	
		For Elevated Installation >40' Above Floor, Add	*12.47*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 05 33 13-0243	EA	1-1/2" x 2" Long, Rigid Galvanized Steel (RGS) Nipple	30.36	12.89
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.88*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	
26 05 33 13-0244	EA	1/2" x 2-1/2" Long, Rigid Galvanized Steel (RGS) Nipple	15.50	6.70
		For Work In Restricted Working Space, Add	*4.02*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.34*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.68*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.35*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.69*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.70*	
		For Elevated Installation >40' Above Floor, Add	*7.37*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.02*	
26 05 33 13-0245	EA	3/4" x 2-1/2" Long, Rigid Galvanized Steel (RGS) Nipple	17.88	7.73
		For Work In Restricted Working Space, Add	*4.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.86*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.41*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.73*	
		For Elevated Installation >40' Above Floor, Add	*8.50*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.64*	
26 05 33 13-0246	EA	1" x 2-1/2" Long, Rigid Galvanized Steel (RGS) Nipple	22.89	9.79
		For Work In Restricted Working Space, Add	*5.87*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.96*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.91*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.89*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.85*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.83*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.79*	
		For Elevated Installation >40' Above Floor, Add	*10.76*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.87*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0247	EA	1-1/4" x 2-1/2" Long, Rigid Galvanized Steel (RGS) Nipple	26.92	11.33
		For Work In Restricted Working Space, Add	*6.80*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.27*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.53*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.67*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.93*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.07*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.34*	
		For Elevated Installation >40' Above Floor, Add	*12.47*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 05 33 13-0248	EA	1-1/2" x 2-1/2" Long, Rigid Galvanized Steel (RGS) Nipple	30.95	12.89
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.88*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	
26 05 33 13-0249	EA	2" x 2-1/2" Long, Rigid Galvanized Steel (RGS) Nipple	35.13	14.43
		For Work In Restricted Working Space, Add	*8.66*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.77*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.54*	
		For Elevated Installation >35' To 40' Above Floor, Add	*14.43*	
		For Elevated Installation >40' Above Floor, Add	*15.87*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.66*	
26 05 33 13-0250	EA	1/2" x 3" Long, Rigid Galvanized Steel (RGS) Nipple	15.67	6.70
		For Work In Restricted Working Space, Add	*4.02*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.34*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.68*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.35*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.69*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.70*	
		For Elevated Installation >40' Above Floor, Add	*7.37*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.02*	
26 05 33 13-0251	EA	3/4" x 3" Long, Rigid Galvanized Steel (RGS) Nipple	18.10	7.73
		For Work In Restricted Working Space, Add	*4.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.86*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.41*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.73*	
		For Elevated Installation >40' Above Floor, Add	*8.50*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.64*	
26 05 33 13-0252	EA	1" x 3" Long, Rigid Galvanized Steel (RGS) Nipple	23.27	9.79
		For Work In Restricted Working Space, Add	*5.87*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.96*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.91*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.89*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.85*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.83*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.79*	
		For Elevated Installation >40' Above Floor, Add	*10.76*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.87*	
26 05 33 13-0253	EA	1-1/4" x 3" Long, Rigid Galvanized Steel (RGS) Nipple	27.25	11.33
		For Work In Restricted Working Space, Add	*6.80*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.27*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.53*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.67*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.93*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.07*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.34*	
		For Elevated Installation >40' Above Floor, Add	*12.47*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 05 33 13-0254	EA	1-1/2" x 3" Long, Rigid Galvanized Steel (RGS) Nipple	31.35	12.89
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.88*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0255	EA	2" x 3" Long, Rigid Galvanized Steel (RGS) Nipple	36.10	14.43
		For Work In Restricted Working Space, Add	*8.66*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.77*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.21*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.54*	
		For Elevated Installation >35' To 40' Above Floor, Add	*14.43*	
		For Elevated Installation >40' Above Floor, Add	*15.87*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.66*	
26 05 33 13-0256	EA	2-1/2" x 3" Long, Rigid Galvanized Steel (RGS) Nipple	50.01	17.52
		For Work In Restricted Working Space, Add	*10.51*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.50*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.01*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.76*	
		For Elevated Installation >25' To 30' Above Floor, Add	*12.26*	
		For Elevated Installation >30' To 35' Above Floor, Add	*14.02*	
		For Elevated Installation >35' To 40' Above Floor, Add	*17.52*	
		For Elevated Installation >40' Above Floor, Add	*19.27*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.51*	
26 05 33 13-0257	EA	3" x 3" Long, Rigid Galvanized Steel (RGS) Nipple	66.84	24.22
		For Work In Restricted Working Space, Add	*14.53*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.84*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.69*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.95*	
		For Elevated Installation >30' To 35' Above Floor, Add	*19.37*	
		For Elevated Installation >35' To 40' Above Floor, Add	*24.22*	
		For Elevated Installation >40' Above Floor, Add	*26.64*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.53*	
26 05 33 13-0258	EA	1/2" x 3-1/2" Long, Rigid Galvanized Steel (RGS) Nipple	15.89	6.70
		For Work In Restricted Working Space, Add	*4.02*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.34*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.68*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.35*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.69*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.70*	
		For Elevated Installation >40' Above Floor, Add	*7.37*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.02*	
26 05 33 13-0259	EA	3/4" x 3-1/2" Long, Rigid Galvanized Steel (RGS) Nipple	18.21	7.73
		For Work In Restricted Working Space, Add	*4.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.86*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.41*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.73*	
		For Elevated Installation >40' Above Floor, Add	*8.50*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.64*	
26 05 33 13-0260	EA	1" x 3-1/2" Long, Rigid Galvanized Steel (RGS) Nipple	23.76	9.79
		For Work In Restricted Working Space, Add	*5.87*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.96*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.91*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.89*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.85*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.83*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.79*	
		For Elevated Installation >40' Above Floor, Add	*10.76*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.87*	
26 05 33 13-0261	EA	1-1/4" x 3-1/2" Long, Rigid Galvanized Steel (RGS) Nipple	27.88	11.33
		For Work In Restricted Working Space, Add	*6.80*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.27*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.53*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.67*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.93*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.07*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.34*	
		For Elevated Installation >40' Above Floor, Add	*12.47*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 05 33 13-0262	EA	1-1/2" x 3-1/2" Long, Rigid Galvanized Steel (RGS) Nipple	32.18	12.89
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.88*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0263	EA	2" x 3-1/2" Long, Rigid Galvanized Steel (RGS), Nipple	37.11	14.43
		For Work In Restricted Working Space, Add	*8.66*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.77*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.21*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.54*	
		For Elevated Installation >35' To 40' Above Floor, Add	*14.43*	
		For Elevated Installation >40' Above Floor, Add	*15.87*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.66*	
26 05 33 13-0264	EA	2-1/2" x 3-1/2" Long, Rigid Galvanized Steel (RGS) Nipple	52.74	17.52
		For Work In Restricted Working Space, Add	*10.51*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.50*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.01*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.76*	
		For Elevated Installation >25' To 30' Above Floor, Add	*12.26*	
		For Elevated Installation >30' To 35' Above Floor, Add	*14.02*	
		For Elevated Installation >35' To 40' Above Floor, Add	*17.52*	
		For Elevated Installation >40' Above Floor, Add	*19.27*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.51*	
26 05 33 13-0265	EA	3" x 3-1/2" Long, Rigid Galvanized Steel (RGS) Nipple	69.20	24.22
		For Work In Restricted Working Space, Add	*14.53*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.84*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.69*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.95*	
		For Elevated Installation >30' To 35' Above Floor, Add	*19.37*	
		For Elevated Installation >35' To 40' Above Floor, Add	*24.22*	
		For Elevated Installation >40' Above Floor, Add	*26.64*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.53*	
26 05 33 13-0266	EA	1/2" x 4" Long, Rigid Galvanized Steel (RGS) Nipple	16.09	6.70
		For Work In Restricted Working Space, Add	*4.02*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.34*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.68*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.35*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.69*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.70*	
		For Elevated Installation >40' Above Floor, Add	*7.37*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.02*	
26 05 33 13-0267	EA	3/4" x 4" Long, Rigid Galvanized Steel (RGS) Nipple	18.59	7.73
		For Work In Restricted Working Space, Add	*4.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.86*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.41*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.73*	
		For Elevated Installation >40' Above Floor, Add	*8.50*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.64*	
26 05 33 13-0268	EA	1" x 4" Long, Rigid Galvanized Steel (RGS) Nipple	24.07	9.79
		For Work In Restricted Working Space, Add	*5.87*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.96*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.91*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.89*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.85*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.83*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.79*	
		For Elevated Installation >40' Above Floor, Add	*10.76*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.87*	
26 05 33 13-0269	EA	1-1/4" x 4" Long, Rigid Galvanized Steel (RGS) Nipple	28.19	11.33
		For Work In Restricted Working Space, Add	*6.80*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.27*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.53*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.67*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.93*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.07*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.34*	
		For Elevated Installation >40' Above Floor, Add	*12.47*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 05 33 13-0270	EA	1-1/2" x 4" Long, Rigid Galvanized Steel (RGS) Nipple	32.75	12.89
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.88*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0271	EA	2" x 4" Long, Rigid Galvanized Steel (RGS) Nipple	37.97	14.43
		For Work In Restricted Working Space, Add	*8.66*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.77*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.21*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.54*	
		For Elevated Installation >35' To 40' Above Floor, Add	*14.43*	
		For Elevated Installation >40' Above Floor, Add	*15.87*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.66*	
26 05 33 13-0272	EA	2-1/2" x 4" Long, Rigid Galvanized Steel (RGS) Nipple	53.58	17.52
		For Work In Restricted Working Space, Add	*10.51*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.50*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.01*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.76*	
		For Elevated Installation >25' To 30' Above Floor, Add	*12.26*	
		For Elevated Installation >30' To 35' Above Floor, Add	*14.02*	
		For Elevated Installation >35' To 40' Above Floor, Add	*17.52*	
		For Elevated Installation >40' Above Floor, Add	*19.27*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.51*	
26 05 33 13-0273	EA	3" x 4" Long, Rigid Galvanized Steel (RGS) Nipple	70.95	24.22
		For Work In Restricted Working Space, Add	*14.53*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.84*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.69*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.95*	
		For Elevated Installation >30' To 35' Above Floor, Add	*19.37*	
		For Elevated Installation >35' To 40' Above Floor, Add	*24.22*	
		For Elevated Installation >40' Above Floor, Add	*26.64*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.53*	
26 05 33 13-0274	EA	3-1/2" x 4" Long, Rigid Galvanized Steel (RGS) Nipple	82.02	27.30
		For Work In Restricted Working Space, Add	*16.38*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.46*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.92*	
		For Elevated Installation >20' To 25' Above Floor, Add	*13.65*	
		For Elevated Installation >25' To 30' Above Floor, Add	*19.11*	
		For Elevated Installation >30' To 35' Above Floor, Add	*21.84*	
		For Elevated Installation >35' To 40' Above Floor, Add	*27.31*	
		For Elevated Installation >40' Above Floor, Add	*30.04*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.38*	
26 05 33 13-0275	EA	4" x 4" Long, Rigid Galvanized Steel (RGS) Nipple	101.87	35.56
		For Work In Restricted Working Space, Add	*21.33*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.11*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.22*	
		For Elevated Installation >20' To 25' Above Floor, Add	*17.78*	
		For Elevated Installation >25' To 30' Above Floor, Add	*24.89*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.44*	
		For Elevated Installation >35' To 40' Above Floor, Add	*35.55*	
		For Elevated Installation >40' Above Floor, Add	*39.11*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.33*	
26 05 33 13-0276	EA	1/2" x 5" Long, Rigid Galvanized Steel (RGS) Nipple	16.41	6.70
		For Work In Restricted Working Space, Add	*4.02*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.34*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.68*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.35*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.69*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.70*	
		For Elevated Installation >40' Above Floor, Add	*7.37*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.02*	
26 05 33 13-0277	EA	3/4" x 5" Long, Rigid Galvanized Steel (RGS) Nipple	19.06	7.73
		For Work In Restricted Working Space, Add	*4.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.86*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.41*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.73*	
		For Elevated Installation >40' Above Floor, Add	*8.50*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.64*	
26 05 33 13-0278	EA	1" x 5" Long, Rigid Galvanized Steel (RGS) Nipple	24.67	9.79
		For Work In Restricted Working Space, Add	*5.87*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.96*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.91*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.89*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.85*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.83*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.79*	
		For Elevated Installation >40' Above Floor, Add	*10.76*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.87*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0279	EA	1-1/4" x 5" Long, Rigid Galvanized Steel (RGS) Nipple	29.06	11.33
		For Work In Restricted Working Space, Add	*6.80*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.27*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.53*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.67*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.93*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.07*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.34*	
		For Elevated Installation >40' Above Floor, Add	*12.47*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 05 33 13-0280	EA	1-1/2" x 5" Long, Rigid Galvanized Steel (RGS) Nipple	33.60	12.89
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.88*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	
26 05 33 13-0281	EA	2" x 5" Long, Rigid Galvanized Steel (RGS) Nipple	39.49	14.43
		For Work In Restricted Working Space, Add	*8.66*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.77*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.21*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.54*	
		For Elevated Installation >35' To 40' Above Floor, Add	*14.43*	
		For Elevated Installation >40' Above Floor, Add	*15.87*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.66*	
26 05 33 13-0282	EA	2-1/2" x 5" Long, Rigid Galvanized Steel (RGS) Nipple	56.95	17.52
		For Work In Restricted Working Space, Add	*10.51*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.50*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.01*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.76*	
		For Elevated Installation >25' To 30' Above Floor, Add	*12.26*	
		For Elevated Installation >30' To 35' Above Floor, Add	*14.02*	
		For Elevated Installation >35' To 40' Above Floor, Add	*17.52*	
		For Elevated Installation >40' Above Floor, Add	*19.27*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.51*	
26 05 33 13-0283	EA	3" x 5" Long, Rigid Galvanized Steel (RGS) Nipple	74.61	24.22
		For Work In Restricted Working Space, Add	*14.53*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.84*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.69*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.95*	
		For Elevated Installation >30' To 35' Above Floor, Add	*19.37*	
		For Elevated Installation >35' To 40' Above Floor, Add	*24.22*	
		For Elevated Installation >40' Above Floor, Add	*26.64*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.53*	
26 05 33 13-0284	EA	3-1/2" x 5" Long, Rigid Galvanized Steel (RGS) Nipple	85.65	27.30
		For Work In Restricted Working Space, Add	*16.38*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.46*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.92*	
		For Elevated Installation >20' To 25' Above Floor, Add	*13.65*	
		For Elevated Installation >25' To 30' Above Floor, Add	*19.11*	
		For Elevated Installation >30' To 35' Above Floor, Add	*21.84*	
		For Elevated Installation >35' To 40' Above Floor, Add	*27.31*	
		For Elevated Installation >40' Above Floor, Add	*30.04*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.38*	
26 05 33 13-0285	EA	4" x 5" Long, Rigid Galvanized Steel (RGS) Nipple	107.18	35.56
		For Work In Restricted Working Space, Add	*21.33*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.11*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.22*	
		For Elevated Installation >20' To 25' Above Floor, Add	*17.78*	
		For Elevated Installation >25' To 30' Above Floor, Add	*24.89*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.44*	
		For Elevated Installation >35' To 40' Above Floor, Add	*35.55*	
		For Elevated Installation >40' Above Floor, Add	*39.11*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.33*	
26 05 33 13-0286	EA	5" x 5" Long, Rigid Galvanized Steel (RGS) Nipple	167.92	48.95
		For Work In Restricted Working Space, Add	*29.37*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.79*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.58*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.47*	
		For Elevated Installation >25' To 30' Above Floor, Add	*34.26*	
		For Elevated Installation >30' To 35' Above Floor, Add	*39.16*	
		For Elevated Installation >35' To 40' Above Floor, Add	*48.95*	
		For Elevated Installation >40' Above Floor, Add	*53.84*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*29.37*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0287	EA	6" x 5" Long, Rigid Galvanized Steel (RGS) Nipple	212.87	62.76
		For Work In Restricted Working Space, Add	*37.68*	
		For Elevated Installation >10' To 15' Above Floor, Add	*12.56*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.12*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.40*	
		For Elevated Installation >25' To 30' Above Floor, Add	*43.96*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.24*	
		For Elevated Installation >35' To 40' Above Floor, Add	*62.80*	
		For Elevated Installation >40' Above Floor, Add	*69.07*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*37.68*	
26 05 33 13-0288	EA	1/2" x 6" Long, Rigid Galvanized Steel (RGS) Nipple	17.00	6.70
		For Work In Restricted Working Space, Add	*4.02*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.34*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.68*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.35*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.69*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.70*	
		For Elevated Installation >40' Above Floor, Add	*7.37*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.02*	
26 05 33 13-0289	EA	3/4" x 6" Long, Rigid Galvanized Steel (RGS) Nipple	19.66	7.73
		For Work In Restricted Working Space, Add	*4.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.86*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.41*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.73*	
		For Elevated Installation >40' Above Floor, Add	*8.50*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.64*	
26 05 33 13-0290	EA	1" x 6" Long, Rigid Galvanized Steel (RGS) Nipple	25.14	9.79
		For Work In Restricted Working Space, Add	*5.87*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.96*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.91*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.89*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.85*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.83*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.79*	
		For Elevated Installation >40' Above Floor, Add	*10.76*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.87*	
26 05 33 13-0291	EA	1-1/4" x 6" Long, Rigid Galvanized Steel (RGS) Nipple	29.86	11.33
		For Work In Restricted Working Space, Add	*6.80*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.27*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.53*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.67*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.93*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.07*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.34*	
		For Elevated Installation >40' Above Floor, Add	*12.47*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 05 33 13-0292	EA	1-1/2" x 6" Long, Rigid Galvanized Steel (RGS) Nipple	35.40	12.89
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.88*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	
26 05 33 13-0293	EA	2" x 6" Long, Rigid Galvanized Steel (RGS) Nipple	41.01	14.43
		For Work In Restricted Working Space, Add	*8.66*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.77*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.21*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.54*	
		For Elevated Installation >35' To 40' Above Floor, Add	*14.43*	
		For Elevated Installation >40' Above Floor, Add	*15.87*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.66*	
26 05 33 13-0294	EA	2-1/2" x 6" Long, Rigid Galvanized Steel (RGS) Nipple	59.91	17.52
		For Work In Restricted Working Space, Add	*10.51*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.50*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.01*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.76*	
		For Elevated Installation >25' To 30' Above Floor, Add	*12.26*	
		For Elevated Installation >30' To 35' Above Floor, Add	*14.02*	
		For Elevated Installation >35' To 40' Above Floor, Add	*17.52*	
		For Elevated Installation >40' Above Floor, Add	*19.27*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.51*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0295	EA	3" x 6" Long, Rigid Galvanized Steel (RGS) Nipple	78.32	24.22
		For Work In Restricted Working Space, Add	*14.53*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.84*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.69*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.95*	
		For Elevated Installation >30' To 35' Above Floor, Add	*19.37*	
		For Elevated Installation >35' To 40' Above Floor, Add	*24.22*	
		For Elevated Installation >40' Above Floor, Add	*26.64*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.53*	
26 05 33 13-0296	EA	3-1/2" x 6" Long, Rigid Galvanized Steel (RGS) Nipple	90.09	27.30
		For Work In Restricted Working Space, Add	*16.38*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.46*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.92*	
		For Elevated Installation >20' To 25' Above Floor, Add	*13.65*	
		For Elevated Installation >25' To 30' Above Floor, Add	*19.11*	
		For Elevated Installation >30' To 35' Above Floor, Add	*21.84*	
		For Elevated Installation >35' To 40' Above Floor, Add	*27.31*	
		For Elevated Installation >40' Above Floor, Add	*30.04*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.38*	
26 05 33 13-0297	EA	4" x 6" Long, Rigid Galvanized Steel (RGS) Nipple	111.39	35.56
		For Work In Restricted Working Space, Add	*21.33*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.11*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.22*	
		For Elevated Installation >20' To 25' Above Floor, Add	*17.78*	
		For Elevated Installation >25' To 30' Above Floor, Add	*24.89*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.44*	
		For Elevated Installation >35' To 40' Above Floor, Add	*35.55*	
		For Elevated Installation >40' Above Floor, Add	*39.11*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.33*	
26 05 33 13-0298	EA	5" x 6" Long, Rigid Galvanized Steel (RGS) Nipple	174.09	48.95
		For Work In Restricted Working Space, Add	*29.37*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.79*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.58*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.47*	
		For Elevated Installation >25' To 30' Above Floor, Add	*34.26*	
		For Elevated Installation >30' To 35' Above Floor, Add	*39.16*	
		For Elevated Installation >35' To 40' Above Floor, Add	*48.95*	
		For Elevated Installation >40' Above Floor, Add	*53.84*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*29.37*	
26 05 33 13-0299	EA	6" x 6" Long, Rigid Galvanized Steel (RGS) Nipple	221.90	62.76
		For Work In Restricted Working Space, Add	*37.68*	
		For Elevated Installation >10' To 15' Above Floor, Add	*12.56*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.12*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.40*	
		For Elevated Installation >25' To 30' Above Floor, Add	*43.96*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.24*	
		For Elevated Installation >35' To 40' Above Floor, Add	*62.80*	
		For Elevated Installation >40' Above Floor, Add	*69.07*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*37.68*	
26 05 33 13-0300	EA	1/2" x 8" Long, Rigid Galvanized Steel (RGS) Nipple	19.14	6.70
		For Work In Restricted Working Space, Add	*4.02*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.34*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.68*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.35*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.69*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.70*	
		For Elevated Installation >40' Above Floor, Add	*7.37*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.02*	
26 05 33 13-0301	EA	3/4" x 8" Long, Rigid Galvanized Steel (RGS) Nipple	22.39	7.73
		For Work In Restricted Working Space, Add	*4.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.86*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.41*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.73*	
		For Elevated Installation >40' Above Floor, Add	*8.50*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.64*	
26 05 33 13-0302	EA	1" x 8" Long, Rigid Galvanized Steel (RGS) Nipple	28.36	9.79
		For Work In Restricted Working Space, Add	*5.87*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.96*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.91*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.89*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.85*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.83*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.79*	
		For Elevated Installation >40' Above Floor, Add	*10.76*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.87*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0303	EA	1-1/4" x 8" Long, Rigid Galvanized Steel (RGS) Nipple	34.44	11.33
		For Work In Restricted Working Space, Add	*6.80*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.27*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.53*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.67*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.93*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.07*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.34*	
		For Elevated Installation >40' Above Floor, Add	*12.47*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 05 33 13-0304	EA	1-1/2" x 8" Long, Rigid Galvanized Steel (RGS) Nipple	40.50	12.89
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.88*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	
26 05 33 13-0305	EA	2" x 8" Long, Rigid Galvanized Steel (RGS) Nipple	46.40	14.43
		For Work In Restricted Working Space, Add	*8.66*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.77*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.21*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.54*	
		For Elevated Installation >35' To 40' Above Floor, Add	*14.43*	
		For Elevated Installation >40' Above Floor, Add	*15.87*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.66*	
26 05 33 13-0306	EA	2-1/2" x 8" Long, Rigid Galvanized Steel (RGS) Nipple	67.75	17.52
		For Work In Restricted Working Space, Add	*10.51*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.50*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.01*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.76*	
		For Elevated Installation >25' To 30' Above Floor, Add	*12.26*	
		For Elevated Installation >30' To 35' Above Floor, Add	*14.02*	
		For Elevated Installation >35' To 40' Above Floor, Add	*17.52*	
		For Elevated Installation >40' Above Floor, Add	*19.27*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.51*	
26 05 33 13-0307	EA	3" x 8" Long, Rigid Galvanized Steel (RGS) Nipple	87.33	24.22
		For Work In Restricted Working Space, Add	*14.53*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.84*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.69*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.95*	
		For Elevated Installation >30' To 35' Above Floor, Add	*19.37*	
		For Elevated Installation >35' To 40' Above Floor, Add	*24.22*	
		For Elevated Installation >40' Above Floor, Add	*26.64*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.53*	
26 05 33 13-0308	EA	3-1/2" x 8" Long, Rigid Galvanized Steel (RGS) Nipple	99.07	27.30
		For Work In Restricted Working Space, Add	*16.38*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.46*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.92*	
		For Elevated Installation >20' To 25' Above Floor, Add	*13.65*	
		For Elevated Installation >25' To 30' Above Floor, Add	*19.11*	
		For Elevated Installation >30' To 35' Above Floor, Add	*21.84*	
		For Elevated Installation >35' To 40' Above Floor, Add	*27.31*	
		For Elevated Installation >40' Above Floor, Add	*30.04*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.38*	
26 05 33 13-0309	EA	4" x 8" Long, Rigid Galvanized Steel (RGS) Nipple	121.31	35.56
		For Work In Restricted Working Space, Add	*21.33*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.11*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.22*	
		For Elevated Installation >20' To 25' Above Floor, Add	*17.78*	
		For Elevated Installation >25' To 30' Above Floor, Add	*24.89*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.44*	
		For Elevated Installation >35' To 40' Above Floor, Add	*35.55*	
		For Elevated Installation >40' Above Floor, Add	*39.11*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.33*	
26 05 33 13-0310	EA	5" x 8" Long, Rigid Galvanized Steel (RGS) Nipple	188.40	48.95
		For Work In Restricted Working Space, Add	*29.37*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.79*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.58*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.47*	
		For Elevated Installation >25' To 30' Above Floor, Add	*34.26*	
		For Elevated Installation >30' To 35' Above Floor, Add	*39.16*	
		For Elevated Installation >35' To 40' Above Floor, Add	*48.95*	
		For Elevated Installation >40' Above Floor, Add	*53.84*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*29.37*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0311	EA	6" x 8" Long, Rigid Galvanized Steel (RGS) Nipple	237.97	62.76
		For Work In Restricted Working Space, Add	*37.68*	
		For Elevated Installation >10' To 15' Above Floor, Add	*12.56*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.12*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.40*	
		For Elevated Installation >25' To 30' Above Floor, Add	*43.96*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.24*	
		For Elevated Installation >35' To 40' Above Floor, Add	*62.80*	
		For Elevated Installation >40' Above Floor, Add	*69.07*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*37.68*	
26 05 33 13-0312	EA	1/2" x 10" Long, Rigid Galvanized Steel (RGS) Nipple	20.58	6.70
		For Work In Restricted Working Space, Add	*4.02*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.34*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.68*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.35*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.69*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.70*	
		For Elevated Installation >40' Above Floor, Add	*7.37*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.02*	
26 05 33 13-0313	EA	3/4" x 10" Long, Rigid Galvanized Steel (RGS) Nipple	23.79	7.73
		For Work In Restricted Working Space, Add	*4.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.86*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.41*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.73*	
		For Elevated Installation >40' Above Floor, Add	*8.50*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.64*	
26 05 33 13-0314	EA	1" x 10" Long, Rigid Galvanized Steel (RGS) Nipple	30.92	9.79
		For Work In Restricted Working Space, Add	*5.87*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.96*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.91*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.89*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.85*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.83*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.79*	
		For Elevated Installation >40' Above Floor, Add	*10.76*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.87*	
26 05 33 13-0315	EA	1-1/4" x 10" Long, Rigid Galvanized Steel (RGS) Nipple	37.48	11.33
		For Work In Restricted Working Space, Add	*6.80*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.27*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.53*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.67*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.93*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.07*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.34*	
		For Elevated Installation >40' Above Floor, Add	*12.47*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 05 33 13-0316	EA	1-1/2" x 10" Long, Rigid Galvanized Steel (RGS) Nipple	43.50	12.89
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.88*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	
26 05 33 13-0317	EA	2" x 10" Long, Rigid Galvanized Steel (RGS) Nipple	49.87	14.43
		For Work In Restricted Working Space, Add	*8.66*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.77*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.21*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.54*	
		For Elevated Installation >35' To 40' Above Floor, Add	*14.43*	
		For Elevated Installation >40' Above Floor, Add	*15.87*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.66*	
26 05 33 13-0318	EA	2-1/2" x 10" Long, Rigid Galvanized Steel (RGS) Nipple	73.02	17.52
		For Work In Restricted Working Space, Add	*10.51*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.50*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.01*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.76*	
		For Elevated Installation >25' To 30' Above Floor, Add	*12.26*	
		For Elevated Installation >30' To 35' Above Floor, Add	*14.02*	
		For Elevated Installation >35' To 40' Above Floor, Add	*17.52*	
		For Elevated Installation >40' Above Floor, Add	*19.27*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.51*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0319	EA	3" x 10" Long, Rigid Galvanized Steel (RGS) Nipple	94.40	24.22
		For Work In Restricted Working Space, Add	*14.53*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.84*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.69*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.95*	
		For Elevated Installation >30' To 35' Above Floor, Add	*19.37*	
		For Elevated Installation >35' To 40' Above Floor, Add	*24.22*	
		For Elevated Installation >40' Above Floor, Add	*26.64*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.53*	
26 05 33 13-0320	EA	3-1/2" x 10" Long, Rigid Galvanized Steel (RGS) Nipple	108.39	27.30
		For Work In Restricted Working Space, Add	*16.38*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.46*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.92*	
		For Elevated Installation >20' To 25' Above Floor, Add	*13.65*	
		For Elevated Installation >25' To 30' Above Floor, Add	*19.11*	
		For Elevated Installation >30' To 35' Above Floor, Add	*21.84*	
		For Elevated Installation >35' To 40' Above Floor, Add	*27.31*	
		For Elevated Installation >40' Above Floor, Add	*30.04*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.38*	
26 05 33 13-0321	EA	4" x 10" Long, Rigid Galvanized Steel (RGS) Nipple	133.12	35.56
		For Work In Restricted Working Space, Add	*21.33*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.11*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.22*	
		For Elevated Installation >20' To 25' Above Floor, Add	*17.78*	
		For Elevated Installation >25' To 30' Above Floor, Add	*24.89*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.44*	
		For Elevated Installation >35' To 40' Above Floor, Add	*35.55*	
		For Elevated Installation >40' Above Floor, Add	*39.11*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.33*	
26 05 33 13-0322	EA	5" x 10" Long, Rigid Galvanized Steel (RGS) Nipple	204.01	48.95
		For Work In Restricted Working Space, Add	*29.37*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.79*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.58*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.47*	
		For Elevated Installation >25' To 30' Above Floor, Add	*34.26*	
		For Elevated Installation >30' To 35' Above Floor, Add	*39.16*	
		For Elevated Installation >35' To 40' Above Floor, Add	*48.95*	
		For Elevated Installation >40' Above Floor, Add	*53.84*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*29.37*	
26 05 33 13-0323	EA	6" x 10" Long, Rigid Galvanized Steel (RGS) Nipple	266.04	62.76
		For Work In Restricted Working Space, Add	*37.68*	
		For Elevated Installation >10' To 15' Above Floor, Add	*12.56*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.12*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.40*	
		For Elevated Installation >25' To 30' Above Floor, Add	*43.96*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.24*	
		For Elevated Installation >35' To 40' Above Floor, Add	*62.80*	
		For Elevated Installation >40' Above Floor, Add	*69.07*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*37.68*	
26 05 33 13-0324	EA	1/2" x 12" Long, Rigid Galvanized Steel (RGS) Nipple	21.68	6.70
		For Work In Restricted Working Space, Add	*4.02*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.34*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.68*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.35*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.69*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.70*	
		For Elevated Installation >40' Above Floor, Add	*7.37*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.02*	
26 05 33 13-0325	EA	3/4" x 12" Long, Rigid Galvanized Steel (RGS) Nipple	24.82	7.73
		For Work In Restricted Working Space, Add	*4.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.86*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.41*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.73*	
		For Elevated Installation >40' Above Floor, Add	*8.50*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.64*	
26 05 33 13-0326	EA	1" x 12" Long, Rigid Galvanized Steel (RGS) Nipple	32.46	9.79
		For Work In Restricted Working Space, Add	*5.87*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.96*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.91*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.89*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.85*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.83*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.79*	
		For Elevated Installation >40' Above Floor, Add	*10.76*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.87*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0327	EA	1-1/4" x 12" Long, Rigid Galvanized Steel (RGS) Nipple	39.92	11.33
		For Work In Restricted Working Space, Add	*6.80*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.27*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.53*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.67*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.93*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.07*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.34*	
		For Elevated Installation >40' Above Floor, Add	*12.47*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 05 33 13-0328	EA	1-1/2" x 12" Long, Rigid Galvanized Steel (RGS) Nipple	45.00	12.89
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.88*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	
26 05 33 13-0329	EA	2" x 12" Long, Rigid Galvanized Steel (RGS) Nipple	52.78	14.43
		For Work In Restricted Working Space, Add	*8.66*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.77*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.21*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.54*	
		For Elevated Installation >35' To 40' Above Floor, Add	*14.43*	
		For Elevated Installation >40' Above Floor, Add	*15.87*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.66*	
26 05 33 13-0330	EA	2-1/2" x 12" Long, Rigid Galvanized Steel (RGS) Nipple	79.22	17.52
		For Work In Restricted Working Space, Add	*10.51*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.50*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.01*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.76*	
		For Elevated Installation >25' To 30' Above Floor, Add	*12.26*	
		For Elevated Installation >30' To 35' Above Floor, Add	*14.02*	
		For Elevated Installation >35' To 40' Above Floor, Add	*17.52*	
		For Elevated Installation >40' Above Floor, Add	*19.27*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.51*	
26 05 33 13-0331	EA	3" x 12" Long, Rigid Galvanized Steel (RGS) Nipple	104.24	24.22
		For Work In Restricted Working Space, Add	*14.53*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.84*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.69*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.95*	
		For Elevated Installation >30' To 35' Above Floor, Add	*19.37*	
		For Elevated Installation >35' To 40' Above Floor, Add	*24.22*	
		For Elevated Installation >40' Above Floor, Add	*26.64*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.53*	
26 05 33 13-0332	EA	3-1/2" x 12" Long, Rigid Galvanized Steel (RGS) Nipple	117.46	27.30
		For Work In Restricted Working Space, Add	*16.38*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.46*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.92*	
		For Elevated Installation >20' To 25' Above Floor, Add	*13.65*	
		For Elevated Installation >25' To 30' Above Floor, Add	*19.11*	
		For Elevated Installation >30' To 35' Above Floor, Add	*21.84*	
		For Elevated Installation >35' To 40' Above Floor, Add	*27.31*	
		For Elevated Installation >40' Above Floor, Add	*30.04*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.38*	
26 05 33 13-0333	EA	4" x 12" Long, Rigid Galvanized Steel (RGS) Nipple	144.94	35.56
		For Work In Restricted Working Space, Add	*21.33*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.11*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.22*	
		For Elevated Installation >20' To 25' Above Floor, Add	*17.78*	
		For Elevated Installation >25' To 30' Above Floor, Add	*24.89*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.44*	
		For Elevated Installation >35' To 40' Above Floor, Add	*35.55*	
		For Elevated Installation >40' Above Floor, Add	*39.11*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.33*	
26 05 33 13-0334	EA	5" x 12" Long, Rigid Galvanized Steel (RGS) Nipple	226.43	48.95
		For Work In Restricted Working Space, Add	*29.37*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.79*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.58*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.47*	
		For Elevated Installation >25' To 30' Above Floor, Add	*34.26*	
		For Elevated Installation >30' To 35' Above Floor, Add	*39.16*	
		For Elevated Installation >35' To 40' Above Floor, Add	*48.95*	
		For Elevated Installation >40' Above Floor, Add	*53.84*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*29.37*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0335	EA	6" x 12" Long, Rigid Galvanized Steel (RGS) Nipple	281.65	62.76
		For Work In Restricted Working Space, Add	*37.68*	
		For Elevated Installation >10' To 15' Above Floor, Add	*12.56*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.12*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.40*	
		For Elevated Installation >25' To 30' Above Floor, Add	*43.96*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.24*	
		For Elevated Installation >35' To 40' Above Floor, Add	*62.80*	
		For Elevated Installation >40' Above Floor, Add	*69.07*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*37.68*	
26 05 33 13-0336		Rigid Galvanized Steel (RGS) Off-Set Nipples *(26 05 33 13-0060)*		
26 05 33 13-0337	EA	1/2" Rigid Galvanized Steel (RGS) Off-Set Nipple	15.86	5.35
		For Work In Restricted Working Space, Add	*4.05*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.73*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.75*	
		For Elevated Installation >40' Above Floor, Add	*7.43*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.05*	
26 05 33 13-0338	EA	3/4" Rigid Galvanized Steel (RGS) Off-Set Nipple	18.98	6.19
		For Work In Restricted Working Space, Add	*4.61*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.54*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.07*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.84*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.38*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.15*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.69*	
		For Elevated Installation >40' Above Floor, Add	*8.45*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.61*	
26 05 33 13-0339	EA	1" Rigid Galvanized Steel (RGS) Off-Set Nipple	23.78	7.83
		For Work In Restricted Working Space, Add	*5.90*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.97*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.93*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.92*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.88*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.86*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.83*	
		For Elevated Installation >40' Above Floor, Add	*10.81*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.90*	
26 05 33 13-0340	EA	1-1/4" Rigid Galvanized Steel (RGS) Off-Set Nipple, Insulated	30.21	9.38
		For Work In Restricted Working Space, Add	*7.07*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.36*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.71*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.89*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.25*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.42*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.78*	
		For Elevated Installation >40' Above Floor, Add	*12.96*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.07*	
26 05 33 13-0341	EA	1-1/2" Rigid Galvanized Steel (RGS) Off-Set Nipple, Insulated	33.08	10.31
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.16*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.45*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.31*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.89*	
		For Elevated Installation >40' Above Floor, Add	*14.18*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	
26 05 33 13-0342	EA	2" Rigid Galvanized Steel (RGS) Off-Set Nipple, Insulated	43.35	12.67
		For Work In Restricted Working Space, Add	*9.53*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.18*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.35*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.94*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.12*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.70*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.88*	
		For Elevated Installation >40' Above Floor, Add	*17.47*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.53*	
26 05 33 13-0343	EA	2-1/2" Rigid Galvanized Steel (RGS) Off-Set Nipple, Insulated	70.84	20.61
		For Work In Restricted Working Space, Add	*15.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.76*	
		For Elevated Installation >40' Above Floor, Add	*28.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.46*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0344	EA	3" Rigid Galvanized Steel (RGS) Off-Set Nipple, Insulated	114.98	28.44
		For Work In Restricted Working Space, Add	*21.33*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.11*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.22*	
		For Elevated Installation >20' To 25' Above Floor, Add	*17.78*	
		For Elevated Installation >25' To 30' Above Floor, Add	*24.89*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.44*	
		For Elevated Installation >35' To 40' Above Floor, Add	*35.55*	
		For Elevated Installation >40' Above Floor, Add	*39.11*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.33*	
26 05 33 13-0345	EA	3-1/2" Rigid Galvanized Steel (RGS) Off-Set Nipple, Insulated	142.78	33.59
		For Work In Restricted Working Space, Add	*25.06*	
		For Elevated Installation >10' To 15' Above Floor, Add	*8.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.71*	
		For Elevated Installation >20' To 25' Above Floor, Add	*20.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*29.24*	
		For Elevated Installation >30' To 35' Above Floor, Add	*33.41*	
		For Elevated Installation >35' To 40' Above Floor, Add	*41.77*	
		For Elevated Installation >40' Above Floor, Add	*45.94*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*25.06*	
26 05 33 13-0346	EA	4" Rigid Galvanized Steel (RGS) Off-Set Nipple, Insulated	171.41	38.75
		For Work In Restricted Working Space, Add	*29.06*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.69*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.38*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*33.91*	
		For Elevated Installation >30' To 35' Above Floor, Add	*38.75*	
		For Elevated Installation >35' To 40' Above Floor, Add	*48.44*	
		For Elevated Installation >40' Above Floor, Add	*53.28*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*29.06*	
26 05 33 13-0347		**Rigid Galvanized Steel (RGS) 3-Piece Conduit Coupling** *(26 05 33 13-0060)*		
		Note: Erickson fittings.		
26 05 33 13-0348	EA	1/2" Rigid Galvanized Steel (RGS) 3-Piece Conduit Coupling (Erickson)	44.04	16.49
		For Work In Restricted Working Space, Add	*12.38*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.13*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.25*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.32*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.51*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.64*	
		For Elevated Installation >40' Above Floor, Add	*22.70*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*12.38*	
26 05 33 13-0349	EA	3/4" Rigid Galvanized Steel (RGS) 3-Piece Conduit Coupling (Erickson)	49.61	18.45
		For Work In Restricted Working Space, Add	*13.82*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.61*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.21*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.52*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.12*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.42*	
		For Elevated Installation >35' To 40' Above Floor, Add	*23.03*	
		For Elevated Installation >40' Above Floor, Add	*25.33*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.82*	
26 05 33 13-0350	EA	1" Rigid Galvanized Steel (RGS) 3-Piece Conduit Coupling (Erickson)	57.86	20.51
		For Work In Restricted Working Space, Add	*15.39*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.13*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.26*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.83*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.96*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.52*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.66*	
		For Elevated Installation >40' Above Floor, Add	*28.22*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.39*	
26 05 33 13-0351	EA	1-1/4" Rigid Galvanized Steel (RGS) 3-Piece Conduit Coupling (Erickson)	70.12	22.46
		For Work In Restricted Working Space, Add	*16.84*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.61*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.23*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.04*	
		For Elevated Installation >25' To 30' Above Floor, Add	*19.65*	
		For Elevated Installation >30' To 35' Above Floor, Add	*22.46*	
		For Elevated Installation >35' To 40' Above Floor, Add	*28.07*	
		For Elevated Installation >40' Above Floor, Add	*30.88*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.84*	
26 05 33 13-0352	EA	1-1/2" Rigid Galvanized Steel (RGS) 3-Piece Conduit Coupling (Erickson)	78.18	24.53
		For Work In Restricted Working Space, Add	*18.43*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.14*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.29*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*21.50*	
		For Elevated Installation >30' To 35' Above Floor, Add	*24.57*	
		For Elevated Installation >35' To 40' Above Floor, Add	*30.72*	
		For Elevated Installation >40' Above Floor, Add	*33.79*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*18.43*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0353	EA	2" Rigid Galvanized Steel (RGS) 3-Piece Conduit Coupling (Erickson)	100.07	26.58
		For Work In Restricted Working Space, Add	*19.96*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.65*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.63*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.28*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.26*	
		For Elevated Installation >40' Above Floor, Add	*36.59*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*19.96*	
26 05 33 13-0354	EA	2-1/2" Rigid Galvanized Steel (RGS) 3-Piece Conduit Coupling (Erickson)	160.16	32.98
		For Work In Restricted Working Space, Add	*24.74*	
		For Elevated Installation >10' To 15' Above Floor, Add	*8.25*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*20.61*	
		For Elevated Installation >25' To 30' Above Floor, Add	*28.86*	
		For Elevated Installation >30' To 35' Above Floor, Add	*32.98*	
		For Elevated Installation >35' To 40' Above Floor, Add	*41.23*	
		For Elevated Installation >40' Above Floor, Add	*45.35*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*24.74*	
26 05 33 13-0355	EA	3" Rigid Galvanized Steel (RGS) 3-Piece Conduit Coupling (Erickson)	221.00	41.22
		For Work In Restricted Working Space, Add	*30.92*	
		For Elevated Installation >10' To 15' Above Floor, Add	*10.31*	
		For Elevated Installation >15' To 20' Above Floor, Add	*20.61*	
		For Elevated Installation >20' To 25' Above Floor, Add	*25.76*	
		For Elevated Installation >25' To 30' Above Floor, Add	*36.07*	
		For Elevated Installation >30' To 35' Above Floor, Add	*41.22*	
		For Elevated Installation >35' To 40' Above Floor, Add	*51.53*	
		For Elevated Installation >40' Above Floor, Add	*56.68*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*30.92*	
26 05 33 13-0356	EA	3-1/2" Rigid Galvanized Steel (RGS) 3-Piece Conduit Coupling (Erickson)	320.17	49.47
		For Work In Restricted Working Space, Add	*37.11*	
		For Elevated Installation >10' To 15' Above Floor, Add	*12.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*24.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*30.93*	
		For Elevated Installation >25' To 30' Above Floor, Add	*43.30*	
		For Elevated Installation >30' To 35' Above Floor, Add	*49.48*	
		For Elevated Installation >35' To 40' Above Floor, Add	*61.86*	
		For Elevated Installation >40' Above Floor, Add	*68.04*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*37.11*	
26 05 33 13-0357	EA	4" Rigid Galvanized Steel (RGS) 3-Piece Conduit Coupling (Erickson)	364.99	53.59
		For Work In Restricted Working Space, Add	*40.19*	
		For Elevated Installation >10' To 15' Above Floor, Add	*13.40*	
		For Elevated Installation >15' To 20' Above Floor, Add	*26.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*33.49*	
		For Elevated Installation >25' To 30' Above Floor, Add	*46.89*	
		For Elevated Installation >30' To 35' Above Floor, Add	*53.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*66.98*	
		For Elevated Installation >40' Above Floor, Add	*73.68*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*40.19*	
26 05 33 13-0358	EA	5" Rigid Galvanized Steel (RGS) 3-Piece Conduit Coupling (Erickson)	639.02	65.95
		For Work In Restricted Working Space, Add	*49.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*16.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*32.97*	
		For Elevated Installation >20' To 25' Above Floor, Add	*41.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*57.70*	
		For Elevated Installation >30' To 35' Above Floor, Add	*65.94*	
		For Elevated Installation >35' To 40' Above Floor, Add	*82.43*	
		For Elevated Installation >40' Above Floor, Add	*90.67*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*49.46*	
26 05 33 13-0359	EA	6" Rigid Galvanized Steel (RGS) 3-Piece Conduit Coupling (Erickson)	822.64	76.26
		For Work In Restricted Working Space, Add	*57.19*	
		For Elevated Installation >10' To 15' Above Floor, Add	*19.06*	
		For Elevated Installation >15' To 20' Above Floor, Add	*38.12*	
		For Elevated Installation >20' To 25' Above Floor, Add	*47.66*	
		For Elevated Installation >25' To 30' Above Floor, Add	*66.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*76.25*	
		For Elevated Installation >35' To 40' Above Floor, Add	*95.31*	
		For Elevated Installation >40' Above Floor, Add	*104.84*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*57.19*	

26 05 33 13-0360 Rigid Galvanized Steel (RGS) To Electrical Metallic Tubing (EMT) Connectors *(26 05 33 13-0060)*

26 05 33 13-0361	EA	1/2" Rigid Galvanized Steel (RGS) To Electrical Metallic Tubing (EMT) Connector	26.94	8.24
		For Work In Restricted Working Space, Add	*6.18*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.06*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.12*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.15*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.21*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.24*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.31*	
		For Elevated Installation >40' Above Floor, Add	*11.34*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0362	EA	3/4" Rigid Galvanized Steel (RGS) To Electrical Metallic Tubing (EMT) Connector	30.16	9.06
		For Work In Restricted Working Space, Add	*6.80*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.27*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.53*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.67*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.93*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.07*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.34*	
		For Elevated Installation >40' Above Floor, Add	*12.47*	
26 05 33 13-0363	EA	1" Rigid Galvanized Steel (RGS) To Electrical Metallic Tubing (EMT) Connector	34.67	10.31
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.88*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
26 05 33 13-0364	EA	1-1/4" Rigid Galvanized Steel (RGS) To Electrical Metallic Tubing (EMT) Connector	39.59	11.13
		For Work In Restricted Working Space, Add	*8.35*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.78*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.57*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.96*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.74*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.13*	
		For Elevated Installation >35' To 40' Above Floor, Add	*13.92*	
		For Elevated Installation >40' Above Floor, Add	*15.31*	
26 05 33 13-0365	EA	1-1/2" Rigid Galvanized Steel (RGS) To Electrical Metallic Tubing (EMT) Connector	47.31	12.36
		For Work In Restricted Working Space, Add	*9.27*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.46*	
		For Elevated Installation >40' Above Floor, Add	*17.00*	
26 05 33 13-0366	EA	2" Rigid Galvanized Steel (RGS) To Electrical Metallic Tubing (EMT) Connector	58.25	13.61
		For Work In Restricted Working Space, Add	*10.20*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.40*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.80*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.50*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.90*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.60*	
		For Elevated Installation >35' To 40' Above Floor, Add	*17.01*	
		For Elevated Installation >40' Above Floor, Add	*18.71*	
26 05 33 13-0367	EA	2-1/2" Rigid Galvanized Steel (RGS) To Electrical Metallic Tubing (EMT) Connector	80.08	16.49
		For Work In Restricted Working Space, Add	*12.37*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.12*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.24*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.31*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.43*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.49*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.61*	
		For Elevated Installation >40' Above Floor, Add	*22.67*	
26 05 33 13-0368	EA	3" Rigid Galvanized Steel (RGS) To Electrical Metallic Tubing (EMT) Connector	98.94	20.61
		For Work In Restricted Working Space, Add	*15.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.76*	
		For Elevated Installation >40' Above Floor, Add	*28.34*	
26 05 33 13-0369	EA	3-1/2" Rigid Galvanized Steel (RGS) To Electrical Metallic Tubing (EMT) Connector	118.87	24.73
		For Work In Restricted Working Space, Add	*18.55*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.18*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.46*	
		For Elevated Installation >25' To 30' Above Floor, Add	*21.64*	
		For Elevated Installation >30' To 35' Above Floor, Add	*24.73*	
		For Elevated Installation >35' To 40' Above Floor, Add	*30.92*	
		For Elevated Installation >40' Above Floor, Add	*34.01*	
26 05 33 13-0370	EA	4" Rigid Galvanized Steel (RGS) To Electrical Metallic Tubing (EMT) Connector	134.72	26.79
		For Work In Restricted Working Space, Add	*20.09*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	

26 05 33 13-0371 Rigid Galvanized Steel (RGS) Water Tight Conduit Hubs *(26 05 33 13-0060)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0372	EA	1/2" Rigid Galvanized Steel (RGS) Water Tight Conduit Hubs	23.43	9.28
		For Work In Restricted Working Space, Add	*5.57*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.86*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.71*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.64*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.49*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.42*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.28*	
		For Elevated Installation >40' Above Floor, Add	*10.20*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.57*	
26 05 33 13-0373	EA	3/4" Rigid Galvanized Steel (RGS) Water Tight Conduit Hubs	26.12	10.31
		For Work In Restricted Working Space, Add	*6.18*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.06*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.12*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.15*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.21*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.24*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.31*	
		For Elevated Installation >40' Above Floor, Add	*11.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.18*	
26 05 33 13-0374	EA	1" Rigid Galvanized Steel (RGS) Water Tight Conduit Hubs	32.22	12.89
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.88*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	
26 05 33 13-0375	EA	1-1/4" Rigid Galvanized Steel (RGS) Water Tight Conduit Hubs	39.69	15.46
		For Work In Restricted Working Space, Add	*9.27*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.46*	
		For Elevated Installation >40' Above Floor, Add	*17.00*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.27*	
26 05 33 13-0376	EA	1-1/2" Rigid Galvanized Steel (RGS) Water Tight Conduit Hubs	50.87	20.61
		For Work In Restricted Working Space, Add	*12.37*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.12*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.24*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.31*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.43*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.49*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.61*	
		For Elevated Installation >40' Above Floor, Add	*22.67*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*12.37*	
26 05 33 13-0377	EA	2" Rigid Galvanized Steel (RGS) Water Tight Conduit Hubs	59.27	23.18
		For Work In Restricted Working Space, Add	*13.91*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.64*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.60*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.55*	
		For Elevated Installation >35' To 40' Above Floor, Add	*23.19*	
		For Elevated Installation >40' Above Floor, Add	*25.51*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.91*	
26 05 33 13-0378	EA	2-1/2" Rigid Galvanized Steel (RGS) Water Tight Conduit Hubs	73.41	25.76
		For Work In Restricted Working Space, Add	*15.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.76*	
		For Elevated Installation >40' Above Floor, Add	*28.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.46*	
26 05 33 13-0379	EA	3" Rigid Galvanized Steel (RGS) Water Tight Conduit Hubs	99.24	32.46
		For Work In Restricted Working Space, Add	*19.48*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.23*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*32.46*	
		For Elevated Installation >40' Above Floor, Add	*35.71*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*19.48*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0380	EA	3-1/2" Rigid Galvanized Steel (RGS) Water Tight Conduit Hubs	117.72	39.16
		For Work In Restricted Working Space, Add	*23.50*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.83*	
		For Elevated Installation >15' To 20' Above Floor, Add	*15.66*	
		For Elevated Installation >20' To 25' Above Floor, Add	*19.58*	
		For Elevated Installation >25' To 30' Above Floor, Add	*27.41*	
		For Elevated Installation >30' To 35' Above Floor, Add	*31.33*	
		For Elevated Installation >35' To 40' Above Floor, Add	*39.16*	
		For Elevated Installation >40' Above Floor, Add	*43.08*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*23.50*	
26 05 33 13-0381	EA	4" Rigid Galvanized Steel (RGS) Water Tight Conduit Hubs	144.69	46.38
		For Work In Restricted Working Space, Add	*27.82*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.27*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.55*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.19*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.46*	
		For Elevated Installation >30' To 35' Above Floor, Add	*37.10*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.37*	
		For Elevated Installation >40' Above Floor, Add	*51.01*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.82*	

26 05 33 13-0382 Rigid Galvanized Steel (RGS) Expansion Fittings, 4" Conduit Movement *(26 05 33 13-0060)*

Note: Type AX

26 05 33 13-0383	EA	1/2" Rigid Galvanized Steel (RGS) Expansion Fitting, 4" Conduit Movement	129.46	16.49
		For Work In Restricted Working Space, Add	*12.37*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.12*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.25*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.31*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.43*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.49*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.62*	
		For Elevated Installation >40' Above Floor, Add	*22.68*	
26 05 33 13-0384	EA	3/4" Rigid Galvanized Steel (RGS) Expansion Fitting, 4" Conduit Movement	147.09	18.55
		For Work In Restricted Working Space, Add	*13.91*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.64*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.27*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.59*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.55*	
		For Elevated Installation >35' To 40' Above Floor, Add	*23.19*	
		For Elevated Installation >40' Above Floor, Add	*25.50*	
26 05 33 13-0385	EA	1" Rigid Galvanized Steel (RGS) Expansion Fitting, 4" Conduit Movement	175.44	20.61
		For Work In Restricted Working Space, Add	*15.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.31*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.04*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.77*	
		For Elevated Installation >40' Above Floor, Add	*28.34*	
26 05 33 13-0386	EA	1-1/4" Rigid Galvanized Steel (RGS) Expansion Fitting, 4" Conduit Movement	217.18	22.67
		For Work In Restricted Working Space, Add	*17.00*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.67*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.34*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.17*	
		For Elevated Installation >25' To 30' Above Floor, Add	*19.84*	
		For Elevated Installation >30' To 35' Above Floor, Add	*22.67*	
		For Elevated Installation >35' To 40' Above Floor, Add	*28.34*	
		For Elevated Installation >40' Above Floor, Add	*31.17*	
26 05 33 13-0387	EA	1-1/2" Rigid Galvanized Steel (RGS) Expansion Fitting, 4" Conduit Movement	276.33	24.73
		For Work In Restricted Working Space, Add	*18.55*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.18*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.46*	
		For Elevated Installation >25' To 30' Above Floor, Add	*21.64*	
		For Elevated Installation >30' To 35' Above Floor, Add	*24.73*	
		For Elevated Installation >35' To 40' Above Floor, Add	*30.92*	
		For Elevated Installation >40' Above Floor, Add	*34.01*	
26 05 33 13-0388	EA	2" Rigid Galvanized Steel (RGS) Expansion Fitting, 4" Conduit Movement	388.71	26.79
		For Work In Restricted Working Space, Add	*20.09*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.39*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.83*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0389	EA	2-1/2" Rigid Galvanized Steel (RGS) Expansion Fitting, 4" Conduit Movement	602.56	32.98
		For Work In Restricted Working Space, Add	*24.74*	
		For Elevated Installation >10' To 15' Above Floor, Add	*8.25*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*20.61*	
		For Elevated Installation >25' To 30' Above Floor, Add	*28.86*	
		For Elevated Installation >30' To 35' Above Floor, Add	*32.98*	
		For Elevated Installation >35' To 40' Above Floor, Add	*41.23*	
		For Elevated Installation >40' Above Floor, Add	*45.35*	
26 05 33 13-0390	EA	3" Rigid Galvanized Steel (RGS) Expansion Fitting, 4" Conduit Movement	772.93	41.22
		For Work In Restricted Working Space, Add	*30.92*	
		For Elevated Installation >10' To 15' Above Floor, Add	*10.31*	
		For Elevated Installation >15' To 20' Above Floor, Add	*20.61*	
		For Elevated Installation >20' To 25' Above Floor, Add	*25.76*	
		For Elevated Installation >25' To 30' Above Floor, Add	*36.07*	
		For Elevated Installation >30' To 35' Above Floor, Add	*41.22*	
		For Elevated Installation >35' To 40' Above Floor, Add	*51.53*	
		For Elevated Installation >40' Above Floor, Add	*56.68*	
26 05 33 13-0391	EA	3-1/2" Rigid Galvanized Steel (RGS) Expansion Fitting, 4" Conduit Movement	1,138.09	49.47
		For Work In Restricted Working Space, Add	*37.10*	
		For Elevated Installation >10' To 15' Above Floor, Add	*12.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*24.73*	
		For Elevated Installation >20' To 25' Above Floor, Add	*30.92*	
		For Elevated Installation >25' To 30' Above Floor, Add	*43.28*	
		For Elevated Installation >30' To 35' Above Floor, Add	*49.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*61.84*	
		For Elevated Installation >40' Above Floor, Add	*68.02*	
26 05 33 13-0392	EA	4" Rigid Galvanized Steel (RGS) Expansion Fitting, 4" Conduit Movement	1,212.43	53.59
		For Work In Restricted Working Space, Add	*40.19*	
		For Elevated Installation >10' To 15' Above Floor, Add	*13.40*	
		For Elevated Installation >15' To 20' Above Floor, Add	*26.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*33.49*	
		For Elevated Installation >25' To 30' Above Floor, Add	*46.89*	
		For Elevated Installation >30' To 35' Above Floor, Add	*53.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*66.98*	
		For Elevated Installation >40' Above Floor, Add	*73.68*	
26 05 33 13-0393	EA	5" Rigid Galvanized Steel (RGS) Expansion Fitting, 4" Conduit Movement	1,871.72	65.95
		For Work In Restricted Working Space, Add	*49.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*16.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*32.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*41.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*57.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*65.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*82.44*	
		For Elevated Installation >40' Above Floor, Add	*90.68*	
26 05 33 13-0394	EA	6" Rigid Galvanized Steel (RGS) Expansion Fitting, 4" Conduit Movement	2,306.37	73.17
		For Work In Restricted Working Space, Add	*54.91*	
		For Elevated Installation >10' To 15' Above Floor, Add	*18.30*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.60*	
		For Elevated Installation >20' To 25' Above Floor, Add	*45.76*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.06*	
		For Elevated Installation >30' To 35' Above Floor, Add	*73.21*	
		For Elevated Installation >35' To 40' Above Floor, Add	*91.51*	
		For Elevated Installation >40' Above Floor, Add	*100.66*	

26 05 33 13-0395 Rigid Galvanized Steel (RGS) Expansion Fittings, 8" Conduit Movement *(26 05 33 13-0060)*

Note: Type AX-8

26 05 33 13-0396	EA	1/2" Rigid Galvanized Steel (RGS) Expansion Fitting, 8" Conduit Movement	144.21	16.49
		For Work In Restricted Working Space, Add	*12.37*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.12*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.25*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.31*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.43*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.49*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.62*	
		For Elevated Installation >40' Above Floor, Add	*22.68*	
26 05 33 13-0397	EA	3/4" Rigid Galvanized Steel (RGS) Expansion Fitting, 8" Conduit Movement	160.16	18.55
		For Work In Restricted Working Space, Add	*13.91*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.64*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.27*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.59*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.55*	
		For Elevated Installation >35' To 40' Above Floor, Add	*23.19*	
		For Elevated Installation >40' Above Floor, Add	*25.50*	
26 05 33 13-0398	EA	1" Rigid Galvanized Steel (RGS) Expansion Fitting, 8" Conduit Movement	195.95	20.61
		For Work In Restricted Working Space, Add	*15.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.31*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.04*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.77*	
		For Elevated Installation >40' Above Floor, Add	*28.34*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0399	EA	1-1/4" Rigid Galvanized Steel (RGS) Expansion Fitting, 8" Conduit Movement	249.48	22.67
		For Work In Restricted Working Space, Add	*17.00*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.67*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.34*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.17*	
		For Elevated Installation >25' To 30' Above Floor, Add	*19.84*	
		For Elevated Installation >30' To 35' Above Floor, Add	*22.67*	
		For Elevated Installation >35' To 40' Above Floor, Add	*28.34*	
		For Elevated Installation >40' Above Floor, Add	*31.17*	
26 05 33 13-0400	EA	1-1/2" Rigid Galvanized Steel (RGS) Expansion Fitting, 8" Conduit Movement	340.50	24.73
		For Work In Restricted Working Space, Add	*18.55*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.18*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.46*	
		For Elevated Installation >25' To 30' Above Floor, Add	*21.64*	
		For Elevated Installation >30' To 35' Above Floor, Add	*24.73*	
		For Elevated Installation >35' To 40' Above Floor, Add	*30.92*	
		For Elevated Installation >40' Above Floor, Add	*34.01*	
26 05 33 13-0401	EA	2" Rigid Galvanized Steel (RGS) Expansion Fitting, 8" Conduit Movement	419.37	26.79
		For Work In Restricted Working Space, Add	*20.09*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.39*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.83*	
26 05 33 13-0402	EA	2-1/2" Rigid Galvanized Steel (RGS) Expansion Fitting, 8" Conduit Movement	801.35	32.98
		For Work In Restricted Working Space, Add	*24.74*	
		For Elevated Installation >10' To 15' Above Floor, Add	*8.25*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*20.61*	
		For Elevated Installation >25' To 30' Above Floor, Add	*28.86*	
		For Elevated Installation >30' To 35' Above Floor, Add	*32.98*	
		For Elevated Installation >35' To 40' Above Floor, Add	*41.23*	
		For Elevated Installation >40' Above Floor, Add	*45.35*	
26 05 33 13-0403	EA	3" Rigid Galvanized Steel (RGS) Expansion Fitting, 8" Conduit Movement	908.67	41.22
		For Work In Restricted Working Space, Add	*30.92*	
		For Elevated Installation >10' To 15' Above Floor, Add	*10.31*	
		For Elevated Installation >15' To 20' Above Floor, Add	*20.61*	
		For Elevated Installation >20' To 25' Above Floor, Add	*25.76*	
		For Elevated Installation >25' To 30' Above Floor, Add	*36.07*	
		For Elevated Installation >30' To 35' Above Floor, Add	*41.22*	
		For Elevated Installation >35' To 40' Above Floor, Add	*51.53*	
		For Elevated Installation >40' Above Floor, Add	*56.68*	
26 05 33 13-0404	EA	3-1/2" Rigid Galvanized Steel (RGS) Expansion Fitting, 8" Conduit Movement	1,406.35	49.47
		For Work In Restricted Working Space, Add	*37.10*	
		For Elevated Installation >10' To 15' Above Floor, Add	*12.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*24.73*	
		For Elevated Installation >20' To 25' Above Floor, Add	*30.92*	
		For Elevated Installation >25' To 30' Above Floor, Add	*43.28*	
		For Elevated Installation >30' To 35' Above Floor, Add	*49.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*61.84*	
		For Elevated Installation >40' Above Floor, Add	*68.02*	
26 05 33 13-0405	EA	4" Rigid Galvanized Steel (RGS) Expansion Fitting, 8" Conduit Movement	1,522.49	53.59
		For Work In Restricted Working Space, Add	*40.19*	
		For Elevated Installation >10' To 15' Above Floor, Add	*13.40*	
		For Elevated Installation >15' To 20' Above Floor, Add	*26.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*33.49*	
		For Elevated Installation >25' To 30' Above Floor, Add	*46.89*	
		For Elevated Installation >30' To 35' Above Floor, Add	*53.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*66.98*	
		For Elevated Installation >40' Above Floor, Add	*73.68*	
26 05 33 13-0406	EA	5" Rigid Galvanized Steel (RGS) Expansion Fitting, 8" Conduit Movement	2,133.08	65.95
		For Work In Restricted Working Space, Add	*49.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*16.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*32.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*41.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*57.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*65.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*82.44*	
		For Elevated Installation >40' Above Floor, Add	*90.68*	
26 05 33 13-0407	EA	6" Rigid Galvanized Steel (RGS) Expansion Fitting, 8" Conduit Movement	2,642.63	73.17
		For Work In Restricted Working Space, Add	*54.91*	
		For Elevated Installation >10' To 15' Above Floor, Add	*18.30*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.60*	
		For Elevated Installation >20' To 25' Above Floor, Add	*45.76*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.06*	
		For Elevated Installation >30' To 35' Above Floor, Add	*73.21*	
		For Elevated Installation >35' To 40' Above Floor, Add	*91.51*	
		For Elevated Installation >40' Above Floor, Add	*100.66*	

26 05 33 13-0408 Rigid Galvanized Steel (RGS)/Intermediate Metal Conduit (IMC) Expansion Fittings, 8" Conduit Movement *(26 05 33 13-0060)*
Note: Type EX

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0409	EA	1/2" Rigid Galvanized Steel (RGS)/Intermediate Metal Conduit (IMC) Expansion Fitting, 8" Conduit Movement	165.80	16.49
		For Work In Restricted Working Space, Add	*12.37*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.12*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.25*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.31*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.43*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.49*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.62*	
		For Elevated Installation >40' Above Floor, Add	*22.68*	
26 05 33 13-0410	EA	3/4" Rigid Galvanized Steel (RGS)/Intermediate Metal Conduit (IMC) Expansion Fitting, 8" Conduit Movement	211.06	18.55
		For Work In Restricted Working Space, Add	*13.91*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.64*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.27*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.59*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.55*	
		For Elevated Installation >35' To 40' Above Floor, Add	*23.19*	
		For Elevated Installation >40' Above Floor, Add	*25.50*	
26 05 33 13-0411	EA	1" Rigid Galvanized Steel (RGS)/Intermediate Metal Conduit (IMC) Expansion Fitting, 8" Conduit Movement	264.71	20.61
		For Work In Restricted Working Space, Add	*15.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.31*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.04*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.77*	
		For Elevated Installation >40' Above Floor, Add	*28.34*	
26 05 33 13-0412	EA	1-1/4" Rigid Galvanized Steel (RGS)/Intermediate Metal Conduit (IMC) Expansion Fitting, 8" Conduit Movement	323.93	22.67
		For Work In Restricted Working Space, Add	*17.00*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.67*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.34*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.17*	
		For Elevated Installation >25' To 30' Above Floor, Add	*19.84*	
		For Elevated Installation >30' To 35' Above Floor, Add	*22.67*	
		For Elevated Installation >35' To 40' Above Floor, Add	*28.34*	
		For Elevated Installation >40' Above Floor, Add	*31.17*	
26 05 33 13-0413	EA	1-1/2" Rigid Galvanized Steel (RGS)/Intermediate Metal Conduit (IMC) Expansion Fitting, 8" Conduit Movement	441.32	24.73
		For Work In Restricted Working Space, Add	*18.55*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.18*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.46*	
		For Elevated Installation >25' To 30' Above Floor, Add	*21.64*	
		For Elevated Installation >30' To 35' Above Floor, Add	*24.73*	
		For Elevated Installation >35' To 40' Above Floor, Add	*30.92*	
		For Elevated Installation >40' Above Floor, Add	*34.01*	
26 05 33 13-0414	EA	2" Rigid Galvanized Steel (RGS)/Intermediate Metal Conduit (IMC) Expansion Fitting, 8" Conduit Movement	614.19	26.79
		For Work In Restricted Working Space, Add	*20.09*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.39*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.83*	
26 05 33 13-0415	EA	2-1/2" Rigid Galvanized Steel (RGS)/Intermediate Metal Conduit (IMC) Expansion Fitting, 8" Conduit Movement	961.74	32.98
		For Work In Restricted Working Space, Add	*24.74*	
		For Elevated Installation >10' To 15' Above Floor, Add	*8.25*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*20.61*	
		For Elevated Installation >25' To 30' Above Floor, Add	*28.86*	
		For Elevated Installation >30' To 35' Above Floor, Add	*32.98*	
		For Elevated Installation >35' To 40' Above Floor, Add	*41.23*	
		For Elevated Installation >40' Above Floor, Add	*45.35*	
26 05 33 13-0416	EA	3" Rigid Galvanized Steel (RGS)/Intermediate Metal Conduit (IMC) Expansion Fitting, 8" Conduit Movement	1,299.19	41.22
		For Work In Restricted Working Space, Add	*30.92*	
		For Elevated Installation >10' To 15' Above Floor, Add	*10.31*	
		For Elevated Installation >15' To 20' Above Floor, Add	*20.61*	
		For Elevated Installation >20' To 25' Above Floor, Add	*25.76*	
		For Elevated Installation >25' To 30' Above Floor, Add	*36.07*	
		For Elevated Installation >30' To 35' Above Floor, Add	*41.22*	
		For Elevated Installation >35' To 40' Above Floor, Add	*51.53*	
		For Elevated Installation >40' Above Floor, Add	*56.68*	
26 05 33 13-0417	EA	3-1/2" Rigid Galvanized Steel (RGS)/Intermediate Metal Conduit (IMC) Expansion Fitting, 8" Conduit Movement	1,961.79	49.47
		For Work In Restricted Working Space, Add	*37.10*	
		For Elevated Installation >10' To 15' Above Floor, Add	*12.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*24.73*	
		For Elevated Installation >20' To 25' Above Floor, Add	*30.92*	
		For Elevated Installation >25' To 30' Above Floor, Add	*43.28*	
		For Elevated Installation >30' To 35' Above Floor, Add	*49.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*61.84*	
		For Elevated Installation >40' Above Floor, Add	*68.02*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0418	EA	4" Rigid Galvanized Steel (RGS)/Intermediate Metal Conduit (IMC) Expansion Fitting, 8" Conduit Movement	2,028.41	53.59
		For Work In Restricted Working Space, Add	*40.19*	
		For Elevated Installation >10' To 15' Above Floor, Add	*13.40*	
		For Elevated Installation >15' To 20' Above Floor, Add	*26.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*33.49*	
		For Elevated Installation >25' To 30' Above Floor, Add	*46.89*	
		For Elevated Installation >30' To 35' Above Floor, Add	*53.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*66.98*	
		For Elevated Installation >40' Above Floor, Add	*73.68*	
26 05 33 13-0419	EA	5" Rigid Galvanized Steel (RGS)/Intermediate Metal Conduit (IMC) Expansion Fitting, 8" Conduit Movement	3,065.68	65.95
		For Work In Restricted Working Space, Add	*49.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*16.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*32.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*41.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*57.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*65.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*82.44*	
		For Elevated Installation >40' Above Floor, Add	*90.68*	
26 05 33 13-0420	EA	6" Rigid Galvanized Steel (RGS)/Intermediate Metal Conduit (IMC) Expansion Fitting, 8" Conduit Movement	3,808.08	73.17
		For Work In Restricted Working Space, Add	*54.91*	
		For Elevated Installation >10' To 15' Above Floor, Add	*18.30*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.60*	
		For Elevated Installation >20' To 25' Above Floor, Add	*45.76*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.06*	
		For Elevated Installation >30' To 35' Above Floor, Add	*73.21*	
		For Elevated Installation >35' To 40' Above Floor, Add	*91.51*	
		For Elevated Installation >40' Above Floor, Add	*100.66*	

26 05 33 13-0421 Rigid Galvanized Steel (RGS)/Intermediate Metal Conduit (IMC) Deflection Expansion Fittings *(26 05 33 13-0060)*

Note: Type DX

26 05 33 13-0422	EA	1/2" Rigid Galvanized Steel (RGS)/Intermediate Metal Conduit (IMC) Deflection Expansion Fitting	298.92	16.49
		For Work In Restricted Working Space, Add	*12.37*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.12*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.25*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.31*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.43*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.49*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.62*	
		For Elevated Installation >40' Above Floor, Add	*22.68*	
26 05 33 13-0423	EA	3/4" Rigid Galvanized Steel (RGS)/Intermediate Metal Conduit (IMC) Deflection Expansion Fitting	357.05	18.55
		For Work In Restricted Working Space, Add	*13.91*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.64*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.27*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.59*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.55*	
		For Elevated Installation >35' To 40' Above Floor, Add	*23.19*	
		For Elevated Installation >40' Above Floor, Add	*25.50*	
26 05 33 13-0424	EA	1" Rigid Galvanized Steel (RGS)/Intermediate Metal Conduit (IMC) Deflection Expansion Fitting	433.18	20.61
		For Work In Restricted Working Space, Add	*15.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.31*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.04*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.77*	
		For Elevated Installation >40' Above Floor, Add	*28.34*	
26 05 33 13-0425	EA	1-1/4" Rigid Galvanized Steel (RGS)/Intermediate Metal Conduit (IMC) Deflection Expansion Fitting	510.60	22.67
		For Work In Restricted Working Space, Add	*17.00*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.67*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.34*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.17*	
		For Elevated Installation >25' To 30' Above Floor, Add	*19.84*	
		For Elevated Installation >30' To 35' Above Floor, Add	*22.67*	
		For Elevated Installation >35' To 40' Above Floor, Add	*28.34*	
		For Elevated Installation >40' Above Floor, Add	*31.17*	
26 05 33 13-0426	EA	1-1/2" Rigid Galvanized Steel (RGS)/Intermediate Metal Conduit (IMC) Deflection Expansion Fitting	564.95	24.73
		For Work In Restricted Working Space, Add	*18.55*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.18*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.46*	
		For Elevated Installation >25' To 30' Above Floor, Add	*21.64*	
		For Elevated Installation >30' To 35' Above Floor, Add	*24.73*	
		For Elevated Installation >35' To 40' Above Floor, Add	*30.92*	
		For Elevated Installation >40' Above Floor, Add	*34.01*	
26 05 33 13-0427	EA	2" Rigid Galvanized Steel (RGS)/Intermediate Metal Conduit (IMC) Deflection Expansion Fitting	701.50	26.79
		For Work In Restricted Working Space, Add	*20.09*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.39*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.83*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0428	EA	2-1/2" Rigid Galvanized Steel (RGS)/Intermediate Metal Conduit (IMC) Deflection Expansion Fitting	929.32	32.98
		For Work In Restricted Working Space, Add	*24.74*	
		For Elevated Installation >10' To 15' Above Floor, Add	*8.25*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*20.61*	
		For Elevated Installation >25' To 30' Above Floor, Add	*28.86*	
		For Elevated Installation >30' To 35' Above Floor, Add	*32.98*	
		For Elevated Installation >35' To 40' Above Floor, Add	*41.23*	
		For Elevated Installation >40' Above Floor, Add	*45.35*	
26 05 33 13-0429	EA	3" Rigid Galvanized Steel (RGS)/Intermediate Metal Conduit (IMC) Deflection Expansion Fitting	1,179.08	41.22
		For Work In Restricted Working Space, Add	*30.92*	
		For Elevated Installation >10' To 15' Above Floor, Add	*10.31*	
		For Elevated Installation >15' To 20' Above Floor, Add	*20.61*	
		For Elevated Installation >20' To 25' Above Floor, Add	*25.76*	
		For Elevated Installation >25' To 30' Above Floor, Add	*36.07*	
		For Elevated Installation >30' To 35' Above Floor, Add	*41.22*	
		For Elevated Installation >35' To 40' Above Floor, Add	*51.53*	
		For Elevated Installation >40' Above Floor, Add	*56.68*	
26 05 33 13-0430	EA	3-1/2" Rigid Galvanized Steel (RGS)/Intermediate Metal Conduit (IMC) Deflection Expansion Fitting	1,324.00	49.47
		For Work In Restricted Working Space, Add	*37.10*	
		For Elevated Installation >10' To 15' Above Floor, Add	*12.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*24.73*	
		For Elevated Installation >20' To 25' Above Floor, Add	*30.92*	
		For Elevated Installation >25' To 30' Above Floor, Add	*43.28*	
		For Elevated Installation >30' To 35' Above Floor, Add	*49.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*61.84*	
		For Elevated Installation >40' Above Floor, Add	*68.02*	
26 05 33 13-0431	EA	4" Rigid Galvanized Steel (RGS)/Intermediate Metal Conduit (IMC) Deflection Expansion Fitting	1,611.10	53.59
		For Work In Restricted Working Space, Add	*40.19*	
		For Elevated Installation >10' To 15' Above Floor, Add	*13.40*	
		For Elevated Installation >15' To 20' Above Floor, Add	*26.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*33.49*	
		For Elevated Installation >25' To 30' Above Floor, Add	*46.89*	
		For Elevated Installation >30' To 35' Above Floor, Add	*53.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*66.98*	
		For Elevated Installation >40' Above Floor, Add	*73.68*	
26 05 33 13-0432	EA	5" Rigid Galvanized Steel (RGS)/Intermediate Metal Conduit (IMC) Deflection Expansion Fitting	2,777.90	65.95
		For Work In Restricted Working Space, Add	*49.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*16.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*32.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*41.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*57.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*65.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*82.44*	
		For Elevated Installation >40' Above Floor, Add	*90.68*	
26 05 33 13-0433	EA	6" Rigid Galvanized Steel (RGS)/Intermediate Metal Conduit (IMC) Deflection Expansion Fitting	4,444.49	73.17
		For Work In Restricted Working Space, Add	*54.91*	
		For Elevated Installation >10' To 15' Above Floor, Add	*18.30*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.60*	
		For Elevated Installation >20' To 25' Above Floor, Add	*45.76*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.06*	
		For Elevated Installation >30' To 35' Above Floor, Add	*73.21*	
		For Elevated Installation >35' To 40' Above Floor, Add	*91.51*	
		For Elevated Installation >40' Above Floor, Add	*100.66*	

26 05 33 13-0434 Rigid Galvanized Steel (RGS) Conduit Bonding Jumpers *(26 05 33 13-0060)*

26 05 33 13-0435	EA	1/2" To 3/4" Conduit, 14" Bonding Jumper	73.75	8.24
		For Work In Restricted Working Space, Add	*6.19*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.06*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.12*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.16*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.22*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.25*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.31*	
		For Elevated Installation >40' Above Floor, Add	*11.34*	
26 05 33 13-0436	EA	1" To 1-1/4" Conduit, 14" Bonding Jumper	84.27	10.31
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.31*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.89*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
26 05 33 13-0437	EA	1-1/2" To 2" Conduit, 14" Bonding Jumper	104.17	12.36
		For Work In Restricted Working Space, Add	*9.27*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.46*	
		For Elevated Installation >40' Above Floor, Add	*17.00*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0438	EA	2-1/2" To 3" Conduit, 14" Bonding Jumper	147.09	16.49
		For Work In Restricted Working Space, Add	*12.37*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.12*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.24*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.31*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.43*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.49*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.61*	
		For Elevated Installation >40' Above Floor, Add	*22.67*	
26 05 33 13-0439	EA	3-1/2" To 4" Conduit, 14" Bonding Jumper	223.06	24.73
		For Work In Restricted Working Space, Add	*18.55*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.18*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.46*	
		For Elevated Installation >25' To 30' Above Floor, Add	*21.64*	
		For Elevated Installation >30' To 35' Above Floor, Add	*24.74*	
		For Elevated Installation >35' To 40' Above Floor, Add	*30.92*	
		For Elevated Installation >40' Above Floor, Add	*34.01*	
26 05 33 13-0440	EA	5" To 6" Conduit, 14" Bonding Jumper	388.77	32.98
		For Work In Restricted Working Space, Add	*24.74*	
		For Elevated Installation >10' To 15' Above Floor, Add	*8.25*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*20.61*	
		For Elevated Installation >25' To 30' Above Floor, Add	*28.86*	
		For Elevated Installation >30' To 35' Above Floor, Add	*32.98*	
		For Elevated Installation >35' To 40' Above Floor, Add	*41.23*	
		For Elevated Installation >40' Above Floor, Add	*45.35*	
26 05 33 13-0441	EA	1/2" To 3/4" Conduit, 24" Bonding Jumper	82.85	8.24
		For Work In Restricted Working Space, Add	*6.19*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.06*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.12*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.16*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.22*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.25*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.31*	
		For Elevated Installation >40' Above Floor, Add	*11.34*	
26 05 33 13-0442	EA	1" To 1-1/4" Conduit, 24" Bonding Jumper	95.77	10.31
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.31*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.89*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
26 05 33 13-0443	EA	1-1/2" To 2" Conduit, 24" Bonding Jumper	114.70	12.36
		For Work In Restricted Working Space, Add	*9.27*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.46*	
		For Elevated Installation >40' Above Floor, Add	*17.00*	
26 05 33 13-0444	EA	2-1/2" To 3" Conduit, 24" Bonding Jumper	161.07	16.49
		For Work In Restricted Working Space, Add	*12.37*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.12*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.24*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.31*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.43*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.49*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.61*	
		For Elevated Installation >40' Above Floor, Add	*22.67*	
26 05 33 13-0445	EA	3-1/2" To 4" Conduit, 24" Bonding Jumper	241.61	24.73
		For Work In Restricted Working Space, Add	*18.55*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.18*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.46*	
		For Elevated Installation >25' To 30' Above Floor, Add	*21.64*	
		For Elevated Installation >30' To 35' Above Floor, Add	*24.74*	
		For Elevated Installation >35' To 40' Above Floor, Add	*30.92*	
		For Elevated Installation >40' Above Floor, Add	*34.01*	
26 05 33 13-0446	EA	5" To 6" Conduit, 24" Bonding Jumper	448.58	32.98
		For Work In Restricted Working Space, Add	*24.74*	
		For Elevated Installation >10' To 15' Above Floor, Add	*8.25*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*20.61*	
		For Elevated Installation >25' To 30' Above Floor, Add	*28.86*	
		For Elevated Installation >30' To 35' Above Floor, Add	*32.98*	
		For Elevated Installation >35' To 40' Above Floor, Add	*41.23*	
		For Elevated Installation >40' Above Floor, Add	*45.35*	

26 05 33 13-0447 Rigid Galvanized Steel (RGS) Sealing Fittings, Vertical/Horizontal *(26 05 33 13-0060)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0448	EA	1/2" Rigid Galvanized Steel (RGS) Sealing Fitting, Vertical/Horizontal	95.42	25.76
		For Work In Restricted Working Space, Add	*15.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.76*	
		For Elevated Installation >40' Above Floor, Add	*28.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.46*	
26 05 33 13-0449	EA	3/4" Rigid Galvanized Steel (RGS) Sealing Fitting, Vertical/Horizontal	113.39	30.91
		For Work In Restricted Working Space, Add	*18.55*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.18*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.46*	
		For Elevated Installation >25' To 30' Above Floor, Add	*21.64*	
		For Elevated Installation >30' To 35' Above Floor, Add	*24.73*	
		For Elevated Installation >35' To 40' Above Floor, Add	*30.92*	
		For Elevated Installation >40' Above Floor, Add	*34.01*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*18.55*	
26 05 33 13-0450	EA	1" Rigid Galvanized Steel (RGS) Sealing Fitting, Vertical/Horizontal	138.40	36.07
		For Work In Restricted Working Space, Add	*21.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.21*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.43*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.04*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.25*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.86*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.07*	
		For Elevated Installation >40' Above Floor, Add	*39.68*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.64*	
26 05 33 13-0451	EA	1-1/4" Rigid Galvanized Steel (RGS) Sealing Fitting, Vertical/Horizontal	162.91	41.22
		For Work In Restricted Working Space, Add	*24.74*	
		For Elevated Installation >10' To 15' Above Floor, Add	*8.25*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*20.61*	
		For Elevated Installation >25' To 30' Above Floor, Add	*28.86*	
		For Elevated Installation >30' To 35' Above Floor, Add	*32.98*	
		For Elevated Installation >35' To 40' Above Floor, Add	*41.23*	
		For Elevated Installation >40' Above Floor, Add	*45.35*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*24.74*	
26 05 33 13-0452	EA	1-1/2" Rigid Galvanized Steel (RGS) Sealing Fitting, Vertical/Horizontal	213.88	46.38
		For Work In Restricted Working Space, Add	*27.82*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.27*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.55*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.19*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.46*	
		For Elevated Installation >30' To 35' Above Floor, Add	*37.10*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.37*	
		For Elevated Installation >40' Above Floor, Add	*51.01*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.82*	
26 05 33 13-0453	EA	2" Rigid Galvanized Steel (RGS) Sealing Fitting, Vertical/Horizontal	260.01	51.52
		For Work In Restricted Working Space, Add	*30.92*	
		For Elevated Installation >10' To 15' Above Floor, Add	*10.31*	
		For Elevated Installation >15' To 20' Above Floor, Add	*20.61*	
		For Elevated Installation >20' To 25' Above Floor, Add	*25.76*	
		For Elevated Installation >25' To 30' Above Floor, Add	*36.07*	
		For Elevated Installation >30' To 35' Above Floor, Add	*41.22*	
		For Elevated Installation >35' To 40' Above Floor, Add	*51.53*	
		For Elevated Installation >40' Above Floor, Add	*56.68*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*30.92*	
26 05 33 13-0454	EA	2-1/2" Rigid Galvanized Steel (RGS) Conduit Sealing Fitting, Vertical/Horizontal	367.52	61.83
		For Work In Restricted Working Space, Add	*37.10*	
		For Elevated Installation >10' To 15' Above Floor, Add	*12.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*24.73*	
		For Elevated Installation >20' To 25' Above Floor, Add	*30.92*	
		For Elevated Installation >25' To 30' Above Floor, Add	*43.28*	
		For Elevated Installation >30' To 35' Above Floor, Add	*49.46*	
		For Elevated Installation >35' To 40' Above Floor, Add	*61.83*	
		For Elevated Installation >40' Above Floor, Add	*68.01*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*37.10*	
26 05 33 13-0455	EA	3" Rigid Galvanized Steel (RGS) Sealing Fitting, Vertical/Horizontal	442.16	72.14
		For Work In Restricted Working Space, Add	*43.28*	
		For Elevated Installation >10' To 15' Above Floor, Add	*14.43*	
		For Elevated Installation >15' To 20' Above Floor, Add	*28.85*	
		For Elevated Installation >20' To 25' Above Floor, Add	*36.07*	
		For Elevated Installation >25' To 30' Above Floor, Add	*50.49*	
		For Elevated Installation >30' To 35' Above Floor, Add	*57.71*	
		For Elevated Installation >35' To 40' Above Floor, Add	*72.14*	
		For Elevated Installation >40' Above Floor, Add	*79.35*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*43.28*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0456	EA	3-1/2" Rigid Galvanized Steel (RGS) Sealing Fitting, Vertical/Horizontal	1,024.01	82.45
		For Work In Restricted Working Space, Add	*49.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*16.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*32.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*41.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*57.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*65.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*82.44*	
		For Elevated Installation >40' Above Floor, Add	*90.68*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*49.46*	
26 05 33 13-0457	EA	4" Rigid Galvanized Steel (RGS) Sealing Fitting, Vertical/Horizontal	1,179.81	92.74
		For Work In Restricted Working Space, Add	*55.65*	
		For Elevated Installation >10' To 15' Above Floor, Add	*18.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*37.10*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.93*	
		For Elevated Installation >30' To 35' Above Floor, Add	*74.20*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.75*	
		For Elevated Installation >40' Above Floor, Add	*102.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*55.65*	

26 05 33 13-0458 Rigid Galvanized Steel (RGS) Threaded Couplings *(26 05 33 13-0060)*

26 05 33 13-0459	EA	1/2" Rigid Galvanized Steel (RGS) Threaded Coupling	13.81	6.19
		For Work In Restricted Working Space, Add	*3.71*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.47*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.09*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.33*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.94*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.18*	
		For Elevated Installation >40' Above Floor, Add	*6.80*	
26 05 33 13-0460	EA	3/4" Rigid Galvanized Steel (RGS) Threaded Coupling	19.34	8.76
		For Work In Restricted Working Space, Add	*5.26*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.75*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.50*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.13*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.01*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.76*	
		For Elevated Installation >40' Above Floor, Add	*9.64*	
26 05 33 13-0461	EA	1" Rigid Galvanized Steel (RGS) Threaded Coupling	25.44	11.33
		For Work In Restricted Working Space, Add	*6.80*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.27*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.53*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.67*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.93*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.07*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.34*	
		For Elevated Installation >40' Above Floor, Add	*12.47*	
26 05 33 13-0462	EA	1-1/4" Rigid Galvanized Steel (RGS) Threaded Coupling	29.26	12.89
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.88*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
26 05 33 13-0463	EA	1-1/2" Rigid Galvanized Steel (RGS) Threaded Coupling	35.29	15.46
		For Work In Restricted Working Space, Add	*9.27*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.46*	
		For Elevated Installation >40' Above Floor, Add	*17.00*	
26 05 33 13-0464	EA	2" Rigid Galvanized Steel (RGS) Threaded Coupling	41.57	17.52
		For Work In Restricted Working Space, Add	*10.51*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.50*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.01*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.76*	
		For Elevated Installation >25' To 30' Above Floor, Add	*12.26*	
		For Elevated Installation >30' To 35' Above Floor, Add	*14.02*	
		For Elevated Installation >35' To 40' Above Floor, Add	*17.52*	
		For Elevated Installation >40' Above Floor, Add	*19.27*	
26 05 33 13-0465	EA	2-1/2" Rigid Galvanized Steel (RGS) Threaded Coupling	53.82	19.58
		For Work In Restricted Working Space, Add	*11.75*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.92*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.83*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.79*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.66*	
		For Elevated Installation >35' To 40' Above Floor, Add	*19.58*	
		For Elevated Installation >40' Above Floor, Add	*21.54*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0466	EA	3" Rigid Galvanized Steel (RGS) Threaded Coupling	63.37	22.16
		For Work In Restricted Working Space, Add	*13.29*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.43*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.86*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.08*	
		For Elevated Installation >25' To 30' Above Floor, Add	*15.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*17.72*	
		For Elevated Installation >35' To 40' Above Floor, Add	*22.16*	
		For Elevated Installation >40' Above Floor, Add	*24.37*	
26 05 33 13-0467	EA	3-1/2" Rigid Galvanized Steel (RGS) Threaded Coupling	74.18	24.22
		For Work In Restricted Working Space, Add	*14.53*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.84*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.69*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.95*	
		For Elevated Installation >30' To 35' Above Floor, Add	*19.37*	
		For Elevated Installation >35' To 40' Above Floor, Add	*24.22*	
		For Elevated Installation >40' Above Floor, Add	*26.64*	
26 05 33 13-0468	EA	4" Threaded Rigid Galvanized Steel (RGS) Coupling	78.34	25.76
		For Work In Restricted Working Space, Add	*15.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.76*	
		For Elevated Installation >40' Above Floor, Add	*28.34*	

26 05 33 13-0469 Rigid Galvanized Steel (RGS) Sealing Locknut *(26 05 33 13-0060)*

26 05 33 13-0470	EA	1/2" Rigid Galvanized Steel (RGS) Sealing Locknut	3.35	1.03
26 05 33 13-0471	EA	3/4" Rigid Galvanized Steel (RGS) Sealing Locknut	4.57	1.54
26 05 33 13-0472	EA	1" Rigid Galvanized Steel (RGS) Sealing Locknut	7.59	2.58
26 05 33 13-0473	EA	1-1/4" Rigid Galvanized Steel (RGS) Sealing Locknut	11.02	3.61
26 05 33 13-0474	EA	1-1/2" Rigid Galvanized Steel (RGS) Sealing Locknut	13.27	4.12
26 05 33 13-0475	EA	2" Rigid Galvanized Steel (RGS) Sealing Locknut	15.69	4.63

26 05 33 13-0476 Rigid Galvanized Steel (RGS) Fire Stop Fittings *(26 05 33 13-0060)*

26 05 33 13-0477	EA	1/2" Rigid Galvanized Steel (RGS) Fire Stop Fitting	206.16	12.51
		For Work In Restricted Working Space, Add	*9.38*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.13*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.25*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.82*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.94*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.51*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.64*	
		For Elevated Installation >40' Above Floor, Add	*17.20*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.38*	
26 05 33 13-0478	EA	3/4" Rigid Galvanized Steel (RGS) Fire Stop Fitting	209.17	13.71
		For Work In Restricted Working Space, Add	*10.28*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.43*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.86*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.57*	
		For Elevated Installation >25' To 30' Above Floor, Add	*12.00*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.71*	
		For Elevated Installation >35' To 40' Above Floor, Add	*17.14*	
		For Elevated Installation >40' Above Floor, Add	*18.85*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.28*	
26 05 33 13-0479	EA	1" Rigid Galvanized Steel (RGS) Fire Stop Fitting	251.59	15.04
		For Work In Restricted Working Space, Add	*11.26*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.75*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.51*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.39*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.14*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.02*	
		For Elevated Installation >35' To 40' Above Floor, Add	*18.77*	
		For Elevated Installation >40' Above Floor, Add	*20.65*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.26*	
26 05 33 13-0480	EA	1-1/4" Rigid Galvanized Steel (RGS) Fire Stop Fitting	276.18	16.49
		For Work In Restricted Working Space, Add	*12.38*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.13*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.25*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.31*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.50*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.63*	
		For Elevated Installation >40' Above Floor, Add	*22.69*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*12.38*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0481	EA	1-1/2" Rigid Galvanized Steel (RGS) Fire Stop Fitting	315.25	18.55
		For Work In Restricted Working Space, Add	*13.91*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.64*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.60*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.55*	
		For Elevated Installation >35' To 40' Above Floor, Add	*23.19*	
		For Elevated Installation >40' Above Floor, Add	*25.51*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.91*	
26 05 33 13-0482	EA	2" Rigid Galvanized Steel (RGS) Fire Stop Fitting	469.21	20.61
		For Work In Restricted Working Space, Add	*15.47*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.16*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.31*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.89*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.04*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.62*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.78*	
		For Elevated Installation >40' Above Floor, Add	*28.35*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.47*	
26 05 33 13-0483	EA	2-1/2" Rigid Galvanized Steel (RGS) Fire Stop Fitting	538.61	27.52
		For Work In Restricted Working Space, Add	*20.62*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.87*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.75*	
		For Elevated Installation >20' To 25' Above Floor, Add	*17.19*	
		For Elevated Installation >25' To 30' Above Floor, Add	*24.06*	
		For Elevated Installation >30' To 35' Above Floor, Add	*27.50*	
		For Elevated Installation >35' To 40' Above Floor, Add	*34.37*	
		For Elevated Installation >40' Above Floor, Add	*37.81*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.62*	
26 05 33 13-0484	EA	3" Rigid Galvanized Steel (RGS) Fire Stop Fitting	597.61	30.19
		For Work In Restricted Working Space, Add	*22.66*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*15.11*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.89*	
		For Elevated Installation >25' To 30' Above Floor, Add	*26.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*30.22*	
		For Elevated Installation >35' To 40' Above Floor, Add	*37.77*	
		For Elevated Installation >40' Above Floor, Add	*41.55*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*22.66*	
26 05 33 13-0485	EA	3-1/2" Rigid Galvanized Steel (RGS) Fire Stop Fitting	695.90	32.98
		For Work In Restricted Working Space, Add	*24.74*	
		For Elevated Installation >10' To 15' Above Floor, Add	*8.25*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*20.62*	
		For Elevated Installation >25' To 30' Above Floor, Add	*28.86*	
		For Elevated Installation >30' To 35' Above Floor, Add	*32.98*	
		For Elevated Installation >35' To 40' Above Floor, Add	*41.23*	
		For Elevated Installation >40' Above Floor, Add	*45.35*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*24.74*	
26 05 33 13-0486	EA	4" Rigid Galvanized Steel (RGS) Fire Stop Fitting	784.49	37.10
		For Work In Restricted Working Space, Add	*27.82*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.27*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.55*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.19*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.46*	
		For Elevated Installation >30' To 35' Above Floor, Add	*37.10*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.37*	
		For Elevated Installation >40' Above Floor, Add	*51.01*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.82*	
26 05 33 13-0487	EA	5" Rigid Galvanized Steel (RGS) Fire Stop Fitting	1,055.83	41.22
		For Work In Restricted Working Space, Add	*30.92*	
		For Elevated Installation >10' To 15' Above Floor, Add	*10.31*	
		For Elevated Installation >15' To 20' Above Floor, Add	*20.61*	
		For Elevated Installation >20' To 25' Above Floor, Add	*25.76*	
		For Elevated Installation >25' To 30' Above Floor, Add	*36.07*	
		For Elevated Installation >30' To 35' Above Floor, Add	*41.22*	
		For Elevated Installation >35' To 40' Above Floor, Add	*51.53*	
		For Elevated Installation >40' Above Floor, Add	*56.68*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*30.92*	
26 05 33 13-0488	EA	6" Rigid Galvanized Steel (RGS) Fire Stop Fitting	1,315.15	45.76
		For Work In Restricted Working Space, Add	*34.31*	
		For Elevated Installation >10' To 15' Above Floor, Add	*11.44*	
		For Elevated Installation >15' To 20' Above Floor, Add	*22.88*	
		For Elevated Installation >20' To 25' Above Floor, Add	*28.60*	
		For Elevated Installation >25' To 30' Above Floor, Add	*40.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*45.75*	
		For Elevated Installation >35' To 40' Above Floor, Add	*57.19*	
		For Elevated Installation >40' Above Floor, Add	*62.91*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*34.31*	

26 05 33 13-0489 Rigid Galvanized Steel (RGS) Reducing Bushings *(26 05 33 13-0060)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0490	EA	3/4" x 1/2" Rigid Galvanized Steel (RGS) Reducing Bushing	16.96	7.98
		For Work In Restricted Working Space, Add	*4.79*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.60*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.99*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.59*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.39*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.99*	
		For Elevated Installation >40' Above Floor, Add	*8.78*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.79*	
26 05 33 13-0491	EA	1" x 1/2" Rigid Galvanized Steel (RGS) Reducing Bushing	18.83	8.50
		For Work In Restricted Working Space, Add	*5.10*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.25*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.95*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.80*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.51*	
		For Elevated Installation >40' Above Floor, Add	*9.36*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.10*	
26 05 33 13-0492	EA	1" x 3/4" Rigid Galvanized Steel (RGS) Reducing Bushing	19.34	8.76
		For Work In Restricted Working Space, Add	*5.26*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.75*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.50*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.13*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.01*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.76*	
		For Elevated Installation >40' Above Floor, Add	*9.64*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.26*	
26 05 33 13-0493	EA	1-1/4" x 1/2" Rigid Galvanized Steel (RGS) Reducing Bushing	22.75	9.01
		For Work In Restricted Working Space, Add	*5.41*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.80*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.61*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.51*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.31*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.21*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.02*	
		For Elevated Installation >40' Above Floor, Add	*9.92*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.41*	
26 05 33 13-0494	EA	1-1/4" x 3/4" Rigid Galvanized Steel (RGS) Reducing Bushing	23.27	9.28
		For Work In Restricted Working Space, Add	*5.57*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.86*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.71*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.64*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.49*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.42*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.28*	
		For Elevated Installation >40' Above Floor, Add	*10.20*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.57*	
26 05 33 13-0495	EA	1-1/4" x 1" Rigid Galvanized Steel (RGS) Reducing Bushing	24.30	9.79
		For Work In Restricted Working Space, Add	*5.87*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.96*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.92*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.90*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.85*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.83*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.79*	
		For Elevated Installation >40' Above Floor, Add	*10.77*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.87*	
26 05 33 13-0496	EA	1-1/2" x 1/2" Rigid Galvanized Steel (RGS) Reducing Bushing	26.33	10.31
		For Work In Restricted Working Space, Add	*6.18*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.06*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.12*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.15*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.21*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.24*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.31*	
		For Elevated Installation >40' Above Floor, Add	*11.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.18*	
26 05 33 13-0497	EA	1-1/2" x 3/4" Rigid Galvanized Steel (RGS) Reducing Bushing	26.85	10.56
		For Work In Restricted Working Space, Add	*6.34*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.11*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.23*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.28*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.40*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.45*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.57*	
		For Elevated Installation >40' Above Floor, Add	*11.62*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.34*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0498	EA	1-1/2" x 1" Rigid Galvanized Steel (RGS) Reducing Bushing	27.88	11.08
		For Work In Restricted Working Space, Add	*6.65*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.22*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.43*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.54*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.76*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.86*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.08*	
		For Elevated Installation >40' Above Floor, Add	*12.19*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.65*	
26 05 33 13-0499	EA	1-1/2" x 1-1/4" Rigid Galvanized Steel (RGS) Reducing Bushing	28.90	11.59
		For Work In Restricted Working Space, Add	*6.95*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.32*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.64*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.80*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.11*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.27*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.59*	
		For Elevated Installation >40' Above Floor, Add	*12.75*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.95*	
26 05 33 13-0500	EA	2" x 1/2" Rigid Galvanized Steel (RGS) Reducing Bushing	35.74	11.59
		For Work In Restricted Working Space, Add	*6.95*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.32*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.64*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.80*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.11*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.27*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.59*	
		For Elevated Installation >40' Above Floor, Add	*12.75*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.95*	
26 05 33 13-0501	EA	2" x 3/4" Rigid Galvanized Steel (RGS) Reducing Bushing	36.26	11.85
		For Work In Restricted Working Space, Add	*7.11*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.93*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.30*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.48*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.85*	
		For Elevated Installation >40' Above Floor, Add	*13.04*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.11*	
26 05 33 13-0502	EA	2" x 1" Rigid Galvanized Steel (RGS) Reducing Bushing	37.29	12.36
		For Work In Restricted Working Space, Add	*7.42*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.47*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.95*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.18*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.66*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.89*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.37*	
		For Elevated Installation >40' Above Floor, Add	*13.60*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.42*	
26 05 33 13-0503	EA	2" x 1-1/4" Rigid Galvanized Steel (RGS) Reducing Bushing	38.32	12.89
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.88*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	
26 05 33 13-0504	EA	2" x 1-1/2" Rigid Galvanized Steel (RGS) Reducing Bushing	40.90	14.17
		For Work In Restricted Working Space, Add	*8.50*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.83*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.67*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.09*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.92*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.34*	
		For Elevated Installation >35' To 40' Above Floor, Add	*14.17*	
		For Elevated Installation >40' Above Floor, Add	*15.59*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.50*	
26 05 33 13-0505	EA	2-1/2" x 2" Rigid Galvanized Steel (RGS) Reducing Bushing	52.10	16.75
		For Work In Restricted Working Space, Add	*10.05*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.05*	

26 05 33 13-0506 Rigid Galvanized Steel (RGS) Locknuts *(26 05 33 13-0060)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0507	EA	1/2" Rigid Galvanized Steel (RGS) Locknuts	2.16	1.03
		For Work In Restricted Working Space, Add	*0.62*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.21*	
		For Elevated Installation >15' To 20' Above Floor, Add	*0.41*	
		For Elevated Installation >20' To 25' Above Floor, Add	*0.52*	
		For Elevated Installation >25' To 30' Above Floor, Add	*0.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*0.83*	
		For Elevated Installation >35' To 40' Above Floor, Add	*1.04*	
		For Elevated Installation >40' Above Floor, Add	*1.14*	
26 05 33 13-0508	EA	3/4" Rigid Galvanized Steel (RGS) Locknuts	3.22	1.54
		For Work In Restricted Working Space, Add	*0.93*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.31*	
		For Elevated Installation >15' To 20' Above Floor, Add	*0.62*	
		For Elevated Installation >20' To 25' Above Floor, Add	*0.77*	
		For Elevated Installation >25' To 30' Above Floor, Add	*1.08*	
		For Elevated Installation >30' To 35' Above Floor, Add	*1.24*	
		For Elevated Installation >35' To 40' Above Floor, Add	*1.55*	
		For Elevated Installation >40' Above Floor, Add	*1.70*	
26 05 33 13-0509	EA	1" Rigid Galvanized Steel (RGS) Locknuts	5.36	2.58
		For Work In Restricted Working Space, Add	*1.55*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.52*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.03*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.29*	
		For Elevated Installation >25' To 30' Above Floor, Add	*1.80*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.06*	
		For Elevated Installation >35' To 40' Above Floor, Add	*2.58*	
		For Elevated Installation >40' Above Floor, Add	*2.83*	
26 05 33 13-0510	EA	1-1/4" Rigid Galvanized Steel (RGS) Locknuts	7.56	3.61
		For Work In Restricted Working Space, Add	*2.16*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.72*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.44*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.80*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.52*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.88*	
		For Elevated Installation >35' To 40' Above Floor, Add	*3.61*	
		For Elevated Installation >40' Above Floor, Add	*3.97*	
26 05 33 13-0511	EA	1-1/2" Rigid Galvanized Steel (RGS) Locknuts	8.69	4.12
		For Work In Restricted Working Space, Add	*2.47*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.82*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.65*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.06*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.88*	
		For Elevated Installation >30' To 35' Above Floor, Add	*3.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*4.12*	
		For Elevated Installation >40' Above Floor, Add	*4.53*	
26 05 33 13-0512	EA	2" Rigid Galvanized Steel (RGS) Locknuts	9.84	4.63
		For Work In Restricted Working Space, Add	*2.78*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.93*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.86*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.32*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.25*	
		For Elevated Installation >30' To 35' Above Floor, Add	*3.71*	
		For Elevated Installation >35' To 40' Above Floor, Add	*4.64*	
		For Elevated Installation >40' Above Floor, Add	*5.10*	
26 05 33 13-0513	EA	2-1/2" Rigid Galvanized Steel (RGS) Locknuts	13.85	6.19
		For Work In Restricted Working Space, Add	*3.71*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.47*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.09*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.33*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.94*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.18*	
		For Elevated Installation >40' Above Floor, Add	*6.80*	
26 05 33 13-0514	EA	3" Rigid Galvanized Steel (RGS) Locknuts	17.10	7.73
		For Work In Restricted Working Space, Add	*4.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.87*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.41*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.73*	
		For Elevated Installation >40' Above Floor, Add	*8.50*	
26 05 33 13-0515	EA	3-1/2" Rigid Galvanized Steel (RGS) Locknuts	20.25	8.76
		For Work In Restricted Working Space, Add	*5.26*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.75*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.50*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.13*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.01*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.76*	
		For Elevated Installation >40' Above Floor, Add	*9.64*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0516	EA	4" Rigid Galvanized Steel (RGS) Locknuts	22.72	9.79
		For Work In Restricted Working Space, Add	*5.87*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.96*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.92*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.90*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.85*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.83*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.79*	
		For Elevated Installation >40' Above Floor, Add	*10.77*	
26 05 33 13-0517		Rigid Galvanized Steel (RGS) Grounding Locknuts *(26 05 33 13-0060)*		
26 05 33 13-0518	EA	1/2" Rigid Galvanized Steel (RGS) Grounding Locknuts	3.43	1.03
		For Work In Restricted Working Space, Add	*0.62*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.21*	
		For Elevated Installation >15' To 20' Above Floor, Add	*0.41*	
		For Elevated Installation >20' To 25' Above Floor, Add	*0.52*	
		For Elevated Installation >25' To 30' Above Floor, Add	*0.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*0.83*	
		For Elevated Installation >35' To 40' Above Floor, Add	*1.04*	
		For Elevated Installation >40' Above Floor, Add	*1.14*	
26 05 33 13-0519	EA	3/4" Rigid Galvanized Steel (RGS) Grounding Locknuts	4.72	1.54
		For Work In Restricted Working Space, Add	*0.93*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.31*	
		For Elevated Installation >15' To 20' Above Floor, Add	*0.62*	
		For Elevated Installation >20' To 25' Above Floor, Add	*0.77*	
		For Elevated Installation >25' To 30' Above Floor, Add	*1.08*	
		For Elevated Installation >30' To 35' Above Floor, Add	*1.24*	
		For Elevated Installation >35' To 40' Above Floor, Add	*1.55*	
		For Elevated Installation >40' Above Floor, Add	*1.70*	
26 05 33 13-0520	EA	1" Rigid Galvanized Steel (RGS) Grounding Locknuts	7.49	2.58
		For Work In Restricted Working Space, Add	*1.55*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.52*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.03*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.29*	
		For Elevated Installation >25' To 30' Above Floor, Add	*1.80*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.06*	
		For Elevated Installation >35' To 40' Above Floor, Add	*2.58*	
		For Elevated Installation >40' Above Floor, Add	*2.83*	
26 05 33 13-0521	EA	1-1/4" Rigid Galvanized Steel (RGS) Grounding Locknuts	10.46	3.61
		For Work In Restricted Working Space, Add	*2.16*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.72*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.44*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.80*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.52*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.88*	
		For Elevated Installation >35' To 40' Above Floor, Add	*3.61*	
		For Elevated Installation >40' Above Floor, Add	*3.97*	
26 05 33 13-0522	EA	1-1/2" Rigid Galvanized Steel (RGS) Grounding Locknuts	11.80	4.12
		For Work In Restricted Working Space, Add	*2.47*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.82*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.65*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.06*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.88*	
		For Elevated Installation >30' To 35' Above Floor, Add	*3.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*4.12*	
		For Elevated Installation >40' Above Floor, Add	*4.53*	
26 05 33 13-0523	EA	2" Rigid Galvanized Steel (RGS) Grounding Locknuts	13.93	4.63
		For Work In Restricted Working Space, Add	*2.78*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.93*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.86*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.32*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.25*	
		For Elevated Installation >30' To 35' Above Floor, Add	*3.71*	
		For Elevated Installation >35' To 40' Above Floor, Add	*4.64*	
		For Elevated Installation >40' Above Floor, Add	*5.10*	
26 05 33 13-0524	EA	2-1/2" Rigid Galvanized Steel (RGS) Grounding Locknuts	20.99	6.19
		For Work In Restricted Working Space, Add	*3.71*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.47*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.09*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.33*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.94*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.18*	
		For Elevated Installation >40' Above Floor, Add	*6.80*	
26 05 33 13-0525	EA	3" Rigid Galvanized Steel (RGS) Grounding Locknuts	26.42	7.73
		For Work In Restricted Working Space, Add	*4.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.87*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.41*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.73*	
		For Elevated Installation >40' Above Floor, Add	*8.50*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0526	EA	3-1/2" Rigid Galvanized Steel (RGS) Grounding Locknuts	35.31	8.76
		For Work In Restricted Working Space, Add	*5.26*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.75*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.50*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.13*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.01*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.76*	
		For Elevated Installation >40' Above Floor, Add	*9.64*	
26 05 33 13-0527	EA	4" Rigid Galvanized Steel (RGS) Grounding Locknuts	42.53	9.79
		For Work In Restricted Working Space, Add	*5.87*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.96*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.92*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.90*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.85*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.83*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.79*	
		For Elevated Installation >40' Above Floor, Add	*10.77*	

26 05 33 13-0528 Rigid Galvanized Steel (RGS) Insulated Ground Bushing *(26 05 33 13-0060)*

26 05 33 13-0529	EA	1/2" Rigid Galvanized Steel (RGS) Insulated Ground Bushing	9.59	3.09
		For Work In Restricted Working Space, Add	*1.86*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.62*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.24*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.55*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.17*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.48*	
		For Elevated Installation >35' To 40' Above Floor, Add	*3.10*	
		For Elevated Installation >40' Above Floor, Add	*3.40*	
26 05 33 13-0530	EA	3/4" Rigid Galvanized Steel (RGS) Insulated Ground Bushing	11.94	4.12
		For Work In Restricted Working Space, Add	*2.47*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.82*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.65*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.06*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.88*	
		For Elevated Installation >30' To 35' Above Floor, Add	*3.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*4.12*	
		For Elevated Installation >40' Above Floor, Add	*4.53*	
26 05 33 13-0531	EA	1" Rigid Galvanized Steel (RGS) Insulated Ground Bushing	15.29	5.15
		For Work In Restricted Working Space, Add	*3.09*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.03*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.06*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.58*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.61*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*5.16*	
		For Elevated Installation >40' Above Floor, Add	*5.67*	
26 05 33 13-0532	EA	1-1/4" Rigid Galvanized Steel (RGS) Insulated Ground Bushing	22.05	8.24
		For Work In Restricted Working Space, Add	*4.95*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.65*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.12*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.77*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.60*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.25*	
		For Elevated Installation >40' Above Floor, Add	*9.07*	
26 05 33 13-0533	EA	1-1/2" Rigid Galvanized Steel (RGS) Insulated Ground Bushing	24.84	9.28
		For Work In Restricted Working Space, Add	*5.57*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.86*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.71*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.64*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.49*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.42*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.28*	
		For Elevated Installation >40' Above Floor, Add	*10.20*	
26 05 33 13-0534	EA	2" Rigid Galvanized Steel (RGS) Insulated Ground Bushing	28.32	10.31
		For Work In Restricted Working Space, Add	*6.18*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.06*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.12*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.15*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.21*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.24*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.31*	
		For Elevated Installation >40' Above Floor, Add	*11.34*	
26 05 33 13-0535	EA	2-1/2" Rigid Galvanized Steel (RGS) Insulated Ground Bushing	39.63	12.36
		For Work In Restricted Working Space, Add	*7.42*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.47*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.95*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.18*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.66*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.89*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.37*	
		For Elevated Installation >40' Above Floor, Add	*13.60*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0536	EA	3" Rigid Galvanized Steel (RGS) Insulated Ground Bushing	47.98	15.46
		For Work In Restricted Working Space, Add	*9.27*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.46*	
		For Elevated Installation >40' Above Floor, Add	*17.00*	
26 05 33 13-0537	EA	3-1/2" Rigid Galvanized Steel (RGS) Insulated Ground Bushing	58.85	20.61
		For Work In Restricted Working Space, Add	*12.37*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.12*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.24*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.31*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.43*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.49*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.61*	
		For Elevated Installation >40' Above Floor, Add	*22.67*	
26 05 33 13-0538	EA	4" Rigid Galvanized Steel (RGS) Insulated Ground Bushing	71.45	25.76
		For Work In Restricted Working Space, Add	*15.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.76*	
		For Elevated Installation >40' Above Floor, Add	*28.34*	

26 05 33 13-0539 Rigid Galvanized Steel (RGS) Threadless Compression Connectors *(26 05 33 13-0060)*

26 05 33 13-0540	EA	1/2" Rigid Galvanized Steel (RGS) Threadless Compression Connectors	22.56	9.28
		For Work In Restricted Working Space, Add	*5.57*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.86*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.71*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.64*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.49*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.42*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.28*	
		For Elevated Installation >40' Above Floor, Add	*10.20*	
26 05 33 13-0541	EA	3/4" Rigid Galvanized Steel (RGS) Threadless Compression Connectors	27.07	10.31
		For Work In Restricted Working Space, Add	*6.18*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.06*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.12*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.15*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.21*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.24*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.31*	
		For Elevated Installation >40' Above Floor, Add	*11.34*	
26 05 33 13-0542	EA	1" Rigid Galvanized Steel (RGS) Threadless Compression Connectors	35.85	12.89
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.88*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
26 05 33 13-0543	EA	1-1/4" Rigid Galvanized Steel (RGS) Threadless Compression Connectors	49.91	15.46
		For Work In Restricted Working Space, Add	*9.27*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.46*	
		For Elevated Installation >40' Above Floor, Add	*17.00*	
26 05 33 13-0544	EA	1-1/2" Rigid Galvanized Steel (RGS) Threadless Compression Connectors	67.53	20.61
		For Work In Restricted Working Space, Add	*12.37*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.12*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.24*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.31*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.43*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.49*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.61*	
		For Elevated Installation >40' Above Floor, Add	*22.67*	
26 05 33 13-0545	EA	2" Rigid Galvanized Steel (RGS) Threadless Compression Connectors	102.00	25.76
		For Work In Restricted Working Space, Add	*15.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.76*	
		For Elevated Installation >40' Above Floor, Add	*28.34*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0546	EA	2-1/2" Rigid Galvanized Steel (RGS) Threadless Compression Connectors	178.28	30.91
		For Work In Restricted Working Space, Add	*18.55*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.18*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.46*	
		For Elevated Installation >25' To 30' Above Floor, Add	*21.64*	
		For Elevated Installation >30' To 35' Above Floor, Add	*24.73*	
		For Elevated Installation >35' To 40' Above Floor, Add	*30.92*	
		For Elevated Installation >40' Above Floor, Add	*34.01*	
26 05 33 13-0547	EA	3" Rigid Galvanized Steel (RGS) Threadless Compression Connectors	226.52	36.07
		For Work In Restricted Working Space, Add	*21.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.21*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.43*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.04*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.25*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.86*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.07*	
		For Elevated Installation >40' Above Floor, Add	*39.68*	
26 05 33 13-0548	EA	3-1/2" Rigid Galvanized Steel (RGS) Threadless Compression Connectors	289.33	43.80
		For Work In Restricted Working Space, Add	*26.28*	
		For Elevated Installation >10' To 15' Above Floor, Add	*8.76*	
		For Elevated Installation >15' To 20' Above Floor, Add	*17.52*	
		For Elevated Installation >20' To 25' Above Floor, Add	*21.90*	
		For Elevated Installation >25' To 30' Above Floor, Add	*30.66*	
		For Elevated Installation >30' To 35' Above Floor, Add	*35.04*	
		For Elevated Installation >35' To 40' Above Floor, Add	*43.80*	
		For Elevated Installation >40' Above Floor, Add	*48.17*	
26 05 33 13-0549	EA	4" Rigid Galvanized Steel (RGS) Threadless Compression Connectors	350.03	51.52
		For Work In Restricted Working Space, Add	*30.92*	
		For Elevated Installation >10' To 15' Above Floor, Add	*10.31*	
		For Elevated Installation >15' To 20' Above Floor, Add	*20.61*	
		For Elevated Installation >20' To 25' Above Floor, Add	*25.76*	
		For Elevated Installation >25' To 30' Above Floor, Add	*36.07*	
		For Elevated Installation >30' To 35' Above Floor, Add	*41.22*	
		For Elevated Installation >35' To 40' Above Floor, Add	*51.53*	
		For Elevated Installation >40' Above Floor, Add	*56.68*	

26 05 33 13-0550 Rigid Galvanized Steel (RGS) Compression Coupling *(26 05 33 13-0060)*

26 05 33 13-0551	EA	1/2" Rigid Galvanized Steel (RGS) Compression Coupling	32.24	12.89
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.88*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
26 05 33 13-0552	EA	3/4" Rigid Galvanized Steel (RGS) Compression Coupling	41.29	15.46
		For Work In Restricted Working Space, Add	*9.27*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.46*	
		For Elevated Installation >40' Above Floor, Add	*17.00*	
26 05 33 13-0553	EA	1" Rigid Galvanized Steel (RGS) Compression Coupling	59.33	20.61
		For Work In Restricted Working Space, Add	*12.37*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.12*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.24*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.31*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.43*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.49*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.61*	
		For Elevated Installation >40' Above Floor, Add	*22.67*	
26 05 33 13-0554	EA	1-1/4" Rigid Galvanized Steel (RGS) Compression Coupling	78.33	25.76
		For Work In Restricted Working Space, Add	*15.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.76*	
		For Elevated Installation >40' Above Floor, Add	*28.34*	
26 05 33 13-0555	EA	1-1/2" Rigid Galvanized Steel (RGS) Compression Coupling	96.74	30.91
		For Work In Restricted Working Space, Add	*18.55*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.18*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.46*	
		For Elevated Installation >25' To 30' Above Floor, Add	*21.64*	
		For Elevated Installation >30' To 35' Above Floor, Add	*24.73*	
		For Elevated Installation >35' To 40' Above Floor, Add	*30.92*	
		For Elevated Installation >40' Above Floor, Add	*34.01*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0556	EA	2" Rigid Galvanized Steel (RGS) Compression Coupling	148.48	36.07
		For Work In Restricted Working Space, Add	*21.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.21*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.43*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.04*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.25*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.86*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.07*	
		For Elevated Installation >40' Above Floor, Add	*39.68*	
26 05 33 13-0557	EA	2-1/2" Rigid Galvanized Steel (RGS) Compression Coupling	243.25	41.22
		For Work In Restricted Working Space, Add	*24.74*	
		For Elevated Installation >10' To 15' Above Floor, Add	*8.25*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*20.61*	
		For Elevated Installation >25' To 30' Above Floor, Add	*28.86*	
		For Elevated Installation >30' To 35' Above Floor, Add	*32.98*	
		For Elevated Installation >35' To 40' Above Floor, Add	*41.23*	
		For Elevated Installation >40' Above Floor, Add	*45.35*	
26 05 33 13-0558	EA	3" Rigid Galvanized Steel (RGS) Compression Coupling	284.14	35.56
		For Work In Restricted Working Space, Add	*21.33*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.11*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.22*	
		For Elevated Installation >20' To 25' Above Floor, Add	*17.78*	
		For Elevated Installation >25' To 30' Above Floor, Add	*24.89*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.44*	
		For Elevated Installation >35' To 40' Above Floor, Add	*35.55*	
		For Elevated Installation >40' Above Floor, Add	*39.11*	
26 05 33 13-0559	EA	3-1/2" Rigid Galvanized Steel (RGS) Compression Coupling	388.66	54.10
		For Work In Restricted Working Space, Add	*32.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*10.82*	
		For Elevated Installation >15' To 20' Above Floor, Add	*21.64*	
		For Elevated Installation >20' To 25' Above Floor, Add	*27.05*	
		For Elevated Installation >25' To 30' Above Floor, Add	*37.87*	
		For Elevated Installation >30' To 35' Above Floor, Add	*43.28*	
		For Elevated Installation >35' To 40' Above Floor, Add	*54.11*	
		For Elevated Installation >40' Above Floor, Add	*59.52*	
26 05 33 13-0560	EA	4" Rigid Galvanized Steel (RGS) Compression Coupling	482.52	61.83
		For Work In Restricted Working Space, Add	*37.10*	
		For Elevated Installation >10' To 15' Above Floor, Add	*12.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*24.73*	
		For Elevated Installation >20' To 25' Above Floor, Add	*30.92*	
		For Elevated Installation >25' To 30' Above Floor, Add	*43.28*	
		For Elevated Installation >30' To 35' Above Floor, Add	*49.46*	
		For Elevated Installation >35' To 40' Above Floor, Add	*61.83*	
		For Elevated Installation >40' Above Floor, Add	*68.01*	

26 05 33 13-0561 Zinc Plated Steel Snap-in Knock Out Seal *(26 05 33 13-0060)*

26 05 33 13-0562	EA	1/2" Zinc Plated Steel Snap-in Knock Out Seal	5.44	2.58
		For Work In Restricted Working Space, Add	*1.55*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.52*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.03*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.29*	
		For Elevated Installation >25' To 30' Above Floor, Add	*1.80*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.06*	
		For Elevated Installation >35' To 40' Above Floor, Add	*2.58*	
		For Elevated Installation >40' Above Floor, Add	*2.83*	
26 05 33 13-0563	EA	3/4" Zinc Plated Steel Snap-in Knock Out Seal	6.57	3.09
		For Work In Restricted Working Space, Add	*1.86*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.62*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.24*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.55*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.17*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.48*	
		For Elevated Installation >35' To 40' Above Floor, Add	*3.10*	
		For Elevated Installation >40' Above Floor, Add	*3.40*	
26 05 33 13-0564	EA	1" Zinc Plated Steel Snap-in Knock Out Seal	7.81	3.61
		For Work In Restricted Working Space, Add	*2.16*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.72*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.44*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.80*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.52*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.88*	
		For Elevated Installation >35' To 40' Above Floor, Add	*3.61*	
		For Elevated Installation >40' Above Floor, Add	*3.97*	
26 05 33 13-0565	EA	1-1/4" Zinc Plated Steel Snap-in Knock Out Seal	10.07	4.63
		For Work In Restricted Working Space, Add	*2.78*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.93*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.86*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.32*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.25*	
		For Elevated Installation >30' To 35' Above Floor, Add	*3.71*	
		For Elevated Installation >35' To 40' Above Floor, Add	*4.64*	
		For Elevated Installation >40' Above Floor, Add	*5.10*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0566	EA	1-1/2" Zinc Plated Steel Snap-in Knock Out Seal	11.41	5.15
		For Work In Restricted Working Space, Add	*3.09*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.03*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.06*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.58*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.61*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*5.16*	
		For Elevated Installation >40' Above Floor, Add	*5.67*	
26 05 33 13-0567	EA	2" Zinc Plated Steel Snap-in Knock Out Seal	13.90	6.19
		For Work In Restricted Working Space, Add	*3.71*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.47*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.09*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.33*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.94*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.18*	
		For Elevated Installation >40' Above Floor, Add	*6.80*	

26 05 33 13-0568 Zinc Plated Steel 3-Piece Knock Out Seal *(26 05 33 13-0060)*

26 05 33 13-0569	EA	1/2" Zinc Plated Steel 3-Piece Knock Out Seal	6.88	2.58
		For Work In Restricted Working Space, Add	*1.55*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.52*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.03*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.29*	
		For Elevated Installation >25' To 30' Above Floor, Add	*1.80*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.06*	
		For Elevated Installation >35' To 40' Above Floor, Add	*2.58*	
		For Elevated Installation >40' Above Floor, Add	*2.83*	
26 05 33 13-0570	EA	3/4" Zinc Plated Steel 3-Piece Knock Out Seal	8.20	3.09
		For Work In Restricted Working Space, Add	*1.86*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.62*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.24*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.55*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.17*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.48*	
		For Elevated Installation >35' To 40' Above Floor, Add	*3.10*	
		For Elevated Installation >40' Above Floor, Add	*3.40*	
26 05 33 13-0571	EA	1" Zinc Plated Steel 3-Piece Knock Out Seal	9.99	3.61
		For Work In Restricted Working Space, Add	*2.16*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.72*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.44*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.80*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.52*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.88*	
		For Elevated Installation >35' To 40' Above Floor, Add	*3.61*	
		For Elevated Installation >40' Above Floor, Add	*3.97*	
26 05 33 13-0572	EA	1-1/4" Zinc Plated Steel 3-Piece Knock Out Seal	12.85	4.63
		For Work In Restricted Working Space, Add	*2.78*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.93*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.86*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.32*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.25*	
		For Elevated Installation >30' To 35' Above Floor, Add	*3.71*	
		For Elevated Installation >35' To 40' Above Floor, Add	*4.64*	
		For Elevated Installation >40' Above Floor, Add	*5.10*	
26 05 33 13-0573	EA	1-1/2" Zinc Plated Steel 3-Piece Knock Out Seal	16.01	5.15
		For Work In Restricted Working Space, Add	*3.09*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.03*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.06*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.58*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.61*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*5.16*	
		For Elevated Installation >40' Above Floor, Add	*5.67*	
26 05 33 13-0574	EA	2" Zinc Plated Steel 3-Piece Knock Out Seal	19.37	6.19
		For Work In Restricted Working Space, Add	*3.71*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.47*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.09*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.33*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.94*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.18*	
		For Elevated Installation >40' Above Floor, Add	*6.80*	
26 05 33 13-0575	EA	2-1/2" Zinc Plated Steel 3-Piece Knock Out Seal	23.72	7.73
		For Work In Restricted Working Space, Add	*4.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.87*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.41*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.73*	
		For Elevated Installation >40' Above Floor, Add	*8.50*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0576	EA	3" Zinc Plated Steel 3-Piece Knock Out Seal	27.83	8.76
		For Work In Restricted Working Space, Add	*5.26*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.75*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.50*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.13*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.01*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.76*	
		For Elevated Installation >40' Above Floor, Add	*9.64*	
26 05 33 13-0577	EA	3-1/2" Zinc Plated Steel 3-Piece Knock Out Seal	34.10	9.79
		For Work In Restricted Working Space, Add	*5.87*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.96*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.92*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.90*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.85*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.83*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.79*	
		For Elevated Installation >40' Above Floor, Add	*10.77*	
26 05 33 13-0578	EA	4" Zinc Plated Steel 3-Piece Knock Out Seal	40.27	10.82
		For Work In Restricted Working Space, Add	*6.49*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.16*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.33*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.41*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.57*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.66*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.82*	
		For Elevated Installation >40' Above Floor, Add	*11.90*	

26 05 33 13-0579 Rigid Galvanized Steel (RGS) Chase Nipples *(26 05 33 13-0060)*

26 05 33 13-0580	EA	1/2" Rigid Galvanized Steel (RGS) Chase Nipple	12.80	6.19
		For Work In Restricted Working Space, Add	*3.71*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.47*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.09*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.33*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.94*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.18*	
		For Elevated Installation >40' Above Floor, Add	*6.80*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.71*	
26 05 33 13-0581	EA	3/4" Rigid Galvanized Steel (RGS) Chase Nipple	15.17	7.21
		For Work In Restricted Working Space, Add	*4.33*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.44*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.89*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.61*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.05*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.77*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.22*	
		For Elevated Installation >40' Above Floor, Add	*7.94*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.33*	
26 05 33 13-0582	EA	1" Rigid Galvanized Steel (RGS) Chase Nipple	19.13	8.76
		For Work In Restricted Working Space, Add	*5.26*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.75*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.50*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.13*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.01*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.76*	
		For Elevated Installation >40' Above Floor, Add	*9.64*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.26*	
26 05 33 13-0583	EA	1-1/4" Rigid Galvanized Steel (RGS) Chase Nipple	23.41	10.31
		For Work In Restricted Working Space, Add	*6.18*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.06*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.12*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.15*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.21*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.24*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.31*	
		For Elevated Installation >40' Above Floor, Add	*11.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.18*	
26 05 33 13-0584	EA	1-1/2" Rigid Galvanized Steel (RGS) Chase Nipple	29.36	12.89
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.88*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0585	EA	2" Rigid Galvanized Steel (RGS) Chase Nipple	36.76	15.46
		For Work In Restricted Working Space, Add	*9.27*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.46*	
		For Elevated Installation >40' Above Floor, Add	*17.00*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.27*	
26 05 33 13-0586	EA	2-1/2" Rigid Galvanized Steel (RGS) Chase Nipple	47.19	18.03
		For Work In Restricted Working Space, Add	*10.82*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.61*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.21*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*12.62*	
		For Elevated Installation >30' To 35' Above Floor, Add	*14.43*	
		For Elevated Installation >35' To 40' Above Floor, Add	*18.04*	
		For Elevated Installation >40' Above Floor, Add	*19.84*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.82*	
26 05 33 13-0587	EA	3" Rigid Galvanized Steel (RGS) Chase Nipple	52.63	20.61
		For Work In Restricted Working Space, Add	*12.37*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.12*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.24*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.31*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.43*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.49*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.61*	
		For Elevated Installation >40' Above Floor, Add	*22.67*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*12.37*	
26 05 33 13-0588	EA	3-1/2" Rigid Galvanized Steel (RGS) Chase Nipple	66.55	23.18
		For Work In Restricted Working Space, Add	*13.91*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.64*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.60*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.55*	
		For Elevated Installation >35' To 40' Above Floor, Add	*23.19*	
		For Elevated Installation >40' Above Floor, Add	*25.51*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.91*	
26 05 33 13-0589	EA	4" Rigid Galvanized Steel (RGS) Chase Nipple	93.78	25.76
		For Work In Restricted Working Space, Add	*15.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.76*	
		For Elevated Installation >40' Above Floor, Add	*28.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.46*	

26 05 33 13-0590 Rigid Galvanized Steel (RGS) Pulling Elbow *(26 05 33 13-0060)*

26 05 33 13-0591	EA	1/2" Rigid Galvanized Steel (RGS) Pulling Elbow	26.22	9.28
		For Work In Restricted Working Space, Add	*5.57*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.86*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.71*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.64*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.49*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.42*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.28*	
		For Elevated Installation >40' Above Floor, Add	*10.20*	
26 05 33 13-0592	EA	3/4" Rigid Galvanized Steel (RGS) Pulling Elbow	30.44	10.82
		For Work In Restricted Working Space, Add	*6.49*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.16*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.33*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.41*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.57*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.66*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.82*	
		For Elevated Installation >40' Above Floor, Add	*11.90*	
26 05 33 13-0593	EA	1" Rigid Galvanized Steel (RGS) Pulling Elbow	39.34	12.36
		For Work In Restricted Working Space, Add	*7.42*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.47*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.95*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.18*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.66*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.89*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.37*	
		For Elevated Installation >40' Above Floor, Add	*13.60*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0594	EA	1-1/4" Rigid Galvanized Steel (RGS) Pulling Elbow	50.58	15.46
		For Work In Restricted Working Space, Add	*9.27*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.46*	
		For Elevated Installation >40' Above Floor, Add	*17.00*	
26 05 33 13-0595	EA	1-1/2" Rigid Galvanized Steel (RGS) Pulling Elbow	68.33	18.55
		For Work In Restricted Working Space, Add	*11.13*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.71*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.42*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.28*	
		For Elevated Installation >25' To 30' Above Floor, Add	*12.99*	
		For Elevated Installation >30' To 35' Above Floor, Add	*14.84*	
		For Elevated Installation >35' To 40' Above Floor, Add	*18.55*	
		For Elevated Installation >40' Above Floor, Add	*20.41*	
26 05 33 13-0596	EA	2" Rigid Galvanized Steel (RGS) Pulling Elbow	92.71	21.64
		For Work In Restricted Working Space, Add	*12.98*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.33*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.66*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.82*	
		For Elevated Installation >25' To 30' Above Floor, Add	*15.15*	
		For Elevated Installation >30' To 35' Above Floor, Add	*17.31*	
		For Elevated Installation >35' To 40' Above Floor, Add	*21.64*	
		For Elevated Installation >40' Above Floor, Add	*23.80*	
26 05 33 13-0597	EA	2-1/2" Rigid Galvanized Steel (RGS) Pulling Elbow	131.07	24.73
		For Work In Restricted Working Space, Add	*14.84*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.95*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.89*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.31*	
		For Elevated Installation >30' To 35' Above Floor, Add	*19.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*24.74*	
		For Elevated Installation >40' Above Floor, Add	*27.21*	
26 05 33 13-0598	EA	3" Rigid Galvanized Steel (RGS) Pulling Elbow	234.69	30.91
		For Work In Restricted Working Space, Add	*18.55*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.18*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.46*	
		For Elevated Installation >25' To 30' Above Floor, Add	*21.64*	
		For Elevated Installation >30' To 35' Above Floor, Add	*24.73*	
		For Elevated Installation >35' To 40' Above Floor, Add	*30.92*	
		For Elevated Installation >40' Above Floor, Add	*34.01*	
26 05 33 13-0599		Electrical Metallic Tubing (EMT) Thinwall Conduit *(26 05 33 13-0059)* Note: Exposed installation, branch and feeder conduit. Excludes supporting strap, hanger and fastening.		
26 05 33 13-0600		Electrical Metallic Tubing (EMT) Thinwall Conduit *(26 05 33 13-0599)* Note: Includes field bending conduit up to and including 1". See CSI section 26 05 33 13-2319 for field bending >1".		
26 05 33 13-0601	LF	1/2" Electrical Metallic Tubing (EMT) Conduit	5.39	1.86
		For >250 To 500, Deduct	*-0.04*	
		For >500 To 1,000, Deduct	*-0.29*	
		For >1,000, Deduct	*-0.42*	
		For Installation In Metal Stud Wall, Add	*0.46*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*1.16*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*0.69*	
		For Work In Restricted Working Space, Add	*1.39*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.46*	
		For Elevated Installation >15' To 20' Above Floor, Add	*0.93*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.16*	
		For Elevated Installation >25' To 30' Above Floor, Add	*1.62*	
		For Elevated Installation >30' To 35' Above Floor, Add	*1.85*	
		For Elevated Installation >35' To 40' Above Floor, Add	*2.32*	
		For Elevated Installation >40' Above Floor, Add	*2.55*	
		For Factory Applied Color Coating, Add	*0.23*	
26 05 33 13-0602	LF	3/4" Electrical Metallic Tubing (EMT) Conduit	6.33	2.07
		For >250 To 500, Deduct	*-0.06*	
		For >500 To 1,000, Deduct	*-0.35*	
		For >1,000, Deduct	*-0.50*	
		For Installation In Metal Stud Wall, Add	*0.52*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*1.29*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*0.77*	
		For Work In Restricted Working Space, Add	*1.55*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.52*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.03*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.29*	
		For Elevated Installation >25' To 30' Above Floor, Add	*1.80*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.06*	
		For Elevated Installation >35' To 40' Above Floor, Add	*2.58*	
		For Elevated Installation >40' Above Floor, Add	*2.83*	
		For Factory Applied Color Coating, Add	*0.35*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0603	LF	1" Electrical Metallic Tubing (EMT) Conduit	7.64	2.27
		For >250 To 500, Deduct	*-0.10*	
		For >500 To 1,000, Deduct	*-0.43*	
		For >1,000, Deduct	*-0.62*	
		For Installation In Metal Stud Wall, Add	*0.57*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*1.42*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*0.85*	
		For Work In Restricted Working Space, Add	*1.70*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.57*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.13*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*1.98*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.27*	
		For Elevated Installation >35' To 40' Above Floor, Add	*2.84*	
		For Elevated Installation >40' Above Floor, Add	*3.12*	
		For Factory Applied Color Coating, Add	*0.59*	
26 05 33 13-0604	LF	1-1/4" Electrical Metallic Tubing (EMT) Conduit	9.50	2.56
		For >250 To 500, Deduct	*-0.16*	
		For >500 To 1,000, Deduct	*-0.55*	
		For >1,000, Deduct	*-0.79*	
		For Installation In Metal Stud Wall, Add	*0.64*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*1.60*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*0.96*	
		For Work In Restricted Working Space, Add	*1.92*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.64*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.60*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.24*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.56*	
		For Elevated Installation >35' To 40' Above Floor, Add	*3.20*	
		For Elevated Installation >40' Above Floor, Add	*3.51*	
		For Factory Applied Color Coating, Add	*0.93*	
26 05 33 13-0605	LF	1-1/2" Electrical Metallic Tubing (EMT) Conduit	11.08	2.89
		For >250 To 500, Deduct	*-0.19*	
		For >500 To 1,000, Deduct	*-0.65*	
		For >1,000, Deduct	*-0.93*	
		For Installation In Metal Stud Wall, Add	*0.72*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*1.80*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*1.08*	
		For Work In Restricted Working Space, Add	*2.16*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.72*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.44*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.80*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.52*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.88*	
		For Elevated Installation >35' To 40' Above Floor, Add	*3.61*	
		For Elevated Installation >40' Above Floor, Add	*3.97*	
		For Factory Applied Color Coating, Add	*1.16*	
26 05 33 13-0606	LF	2" Electrical Metallic Tubing (EMT) Conduit	12.83	3.30
		For >250 To 500, Deduct	*-0.23*	
		For >500 To 1,000, Deduct	*-0.76*	
		For >1,000, Deduct	*-1.08*	
		For Installation In Metal Stud Wall, Add	*0.82*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*2.06*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*1.24*	
		For Work In Restricted Working Space, Add	*2.47*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.82*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.65*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.06*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.88*	
		For Elevated Installation >30' To 35' Above Floor, Add	*3.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*4.12*	
		For Elevated Installation >40' Above Floor, Add	*4.53*	
		For Factory Applied Color Coating, Add	*1.38*	
26 05 33 13-0607	LF	2-1/2" Electrical Metallic Tubing (EMT) Conduit	16.59	3.92
		For >250 To 500, Deduct	*-0.34*	
		For >500 To 1,000, Deduct	*-1.00*	
		For >1,000, Deduct	*-1.41*	
		For Installation In Metal Stud Wall, Add	*0.98*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*2.45*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*1.47*	
		For Work In Restricted Working Space, Add	*2.94*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.98*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.96*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.45*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.43*	
		For Elevated Installation >30' To 35' Above Floor, Add	*3.92*	
		For Elevated Installation >35' To 40' Above Floor, Add	*4.90*	
		For Elevated Installation >40' Above Floor, Add	*5.38*	
		For Factory Applied Color Coating, Add	*2.04*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0608	LF	3" Electrical Metallic Tubing (EMT) Conduit	19.85	4.53
		For >250 To 500, Deduct	*-0.43*	
		For >500 To 1,000, Deduct	*-1.21*	
		For >1,000, Deduct	*-1.70*	
		For Installation In Metal Stud Wall, Add	*1.13*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*2.83*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*1.70*	
		For Work In Restricted Working Space, Add	*3.40*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.13*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.27*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.83*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.97*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.53*	
		For Elevated Installation >35' To 40' Above Floor, Add	*5.67*	
		For Elevated Installation >40' Above Floor, Add	*6.23*	
		For Factory Applied Color Coating, Add	*2.56*	
26 05 33 13-0609	LF	3-1/2" Electrical Metallic Tubing (EMT) Conduit	24.78	5.35
		For >250 To 500, Deduct	*-0.57*	
		For >500 To 1,000, Deduct	*-1.52*	
		For >1,000, Deduct	*-2.14*	
		For Installation In Metal Stud Wall, Add	*1.34*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*3.35*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*2.01*	
		For Work In Restricted Working Space, Add	*4.02*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.34*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.68*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.35*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.69*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.70*	
		For Elevated Installation >40' Above Floor, Add	*7.37*	
		For Factory Applied Color Coating, Add	*3.41*	
26 05 33 13-0610	LF	4" Electrical Metallic Tubing (EMT) Conduit	33.62	8.32
		For >250 To 500, Deduct	*-0.64*	
		For >500 To 1,000, Deduct	*-2.00*	
		For >1,000, Deduct	*-2.84*	
		For Installation In Metal Stud Wall, Add	*2.08*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*5.20*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*3.12*	
		For Work In Restricted Working Space, Add	*6.24*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.08*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.16*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.20*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.28*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.32*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.40*	
		For Elevated Installation >40' Above Floor, Add	*11.43*	
		For Factory Applied Color Coating, Add	*3.85*	

26 05 33 13-0611 Electrical Metallic Tubing (EMT) 90 Degree Elbows *(26 05 33 13-0599)*

See CSI section 26 05 33 13-2319 for conduit field bending.

26 05 33 13-0612	EA	1/2" Electrical Metallic Tubing (EMT) 90 Degree Elbow	13.46	4.53
		For Work In Restricted Working Space, Add	*3.40*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.13*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.27*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.84*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.97*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.54*	
		For Elevated Installation >35' To 40' Above Floor, Add	*5.67*	
		For Elevated Installation >40' Above Floor, Add	*6.24*	
26 05 33 13-0613	EA	3/4" Electrical Metallic Tubing (EMT) 90 Degree Elbow	14.24	4.94
		For Work In Restricted Working Space, Add	*3.71*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.47*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.09*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.33*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.94*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.18*	
		For Elevated Installation >40' Above Floor, Add	*6.80*	
26 05 33 13-0614	EA	1" Electrical Metallic Tubing (EMT) 90 Degree Elbow	17.39	5.78
		For Work In Restricted Working Space, Add	*4.33*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.44*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.89*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.61*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.05*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.77*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.22*	
		For Elevated Installation >40' Above Floor, Add	*7.94*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0615	EA	1-1/4" Electrical Metallic Tubing (EMT) 90 Degree Elbow	19.14	6.19
		For Work In Restricted Working Space, Add	*4.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.87*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.41*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.73*	
		For Elevated Installation >40' Above Floor, Add	*8.50*	
26 05 33 13-0616	EA	1-1/2" Electrical Metallic Tubing (EMT) 90 Degree Elbow	22.68	7.42
		For Work In Restricted Working Space, Add	*5.57*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.86*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.71*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.64*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.49*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.42*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.28*	
		For Elevated Installation >40' Above Floor, Add	*10.20*	
26 05 33 13-0617	EA	2" Electrical Metallic Tubing (EMT) 90 Degree Elbow	29.81	9.48
		For Work In Restricted Working Space, Add	*7.11*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.93*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.30*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.48*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.85*	
		For Elevated Installation >40' Above Floor, Add	*13.04*	
26 05 33 13-0618	EA	2-1/2" Electrical Metallic Tubing (EMT) 90 Degree Elbow	40.29	10.72
		For Work In Restricted Working Space, Add	*8.04*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.68*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.36*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.70*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.38*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.72*	
		For Elevated Installation >35' To 40' Above Floor, Add	*13.40*	
		For Elevated Installation >40' Above Floor, Add	*14.73*	
26 05 33 13-0619	EA	3" Electrical Metallic Tubing (EMT) 90 Degree Elbow	51.68	11.95
		For Work In Restricted Working Space, Add	*8.96*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.99*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.47*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.46*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*14.94*	
		For Elevated Installation >40' Above Floor, Add	*16.43*	
26 05 33 13-0620	EA	3-1/2" Electrical Metallic Tubing (EMT) 90 Degree Elbow	58.77	13.19
		For Work In Restricted Working Space, Add	*9.89*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.30*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.60*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.25*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.19*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.49*	
		For Elevated Installation >40' Above Floor, Add	*18.14*	
26 05 33 13-0621	EA	4" Electrical Metallic Tubing (EMT) 90 Degree Elbow	126.03	36.39
		For Work In Restricted Working Space, Add	*27.29*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.10*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.20*	
		For Elevated Installation >20' To 25' Above Floor, Add	*22.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*31.84*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.39*	
		For Elevated Installation >35' To 40' Above Floor, Add	*45.49*	
		For Elevated Installation >40' Above Floor, Add	*50.04*	

26 05 33 13-0622 Electrical Metallic Tubing (EMT) 45 Degree Elbows *(26 05 33 13-0599)*

See CSI section 26 05 33 13-2319 for conduit field bending.

26 05 33 13-0623	EA	1/2" Electrical Metallic Tubing (EMT) 45 Degree Elbow	13.23	4.53
		For Work In Restricted Working Space, Add	*3.40*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.13*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.27*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.84*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.97*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.54*	
		For Elevated Installation >35' To 40' Above Floor, Add	*5.67*	
		For Elevated Installation >40' Above Floor, Add	*6.24*	
26 05 33 13-0624	EA	3/4" Electrical Metallic Tubing (EMT) 45 Degree Elbow	14.38	4.94
		For Work In Restricted Working Space, Add	*3.71*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.47*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.09*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.33*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.94*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.18*	
		For Elevated Installation >40' Above Floor, Add	*6.80*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0625	EA	1" Electrical Metallic Tubing (EMT) 45 Degree Elbow	17.69	5.78
		For Work In Restricted Working Space, Add	*4.33*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.44*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.89*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.61*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.05*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.77*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.22*	
		For Elevated Installation >40' Above Floor, Add	*7.94*	
26 05 33 13-0626	EA	1-1/4" Electrical Metallic Tubing (EMT) 45 Degree Elbow	19.70	6.19
		For Work In Restricted Working Space, Add	*4.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.87*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.41*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.73*	
		For Elevated Installation >40' Above Floor, Add	*8.50*	
26 05 33 13-0627	EA	1-1/2" Electrical Metallic Tubing (EMT) 45 Degree Elbow	23.40	7.42
		For Work In Restricted Working Space, Add	*5.57*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.86*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.71*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.64*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.49*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.42*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.28*	
		For Elevated Installation >40' Above Floor, Add	*10.20*	
26 05 33 13-0628	EA	2" Electrical Metallic Tubing (EMT) 45 Degree Elbow	29.58	9.48
		For Work In Restricted Working Space, Add	*7.11*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.93*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.30*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.48*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.85*	
		For Elevated Installation >40' Above Floor, Add	*13.04*	
26 05 33 13-0629	EA	2-1/2" Electrical Metallic Tubing (EMT) 45 Degree Elbow	42.36	10.72
		For Work In Restricted Working Space, Add	*8.04*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.68*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.36*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.70*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.38*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.72*	
		For Elevated Installation >35' To 40' Above Floor, Add	*13.40*	
		For Elevated Installation >40' Above Floor, Add	*14.73*	
26 05 33 13-0630	EA	3" Electrical Metallic Tubing (EMT) 45 Degree Elbow	53.32	11.95
		For Work In Restricted Working Space, Add	*8.96*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.99*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.47*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.46*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*14.94*	
		For Elevated Installation >40' Above Floor, Add	*16.43*	
26 05 33 13-0631	EA	3-1/2" Electrical Metallic Tubing (EMT) 45 Degree Elbow	63.22	13.19
		For Work In Restricted Working Space, Add	*9.89*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.30*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.60*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.25*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.19*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.49*	
		For Elevated Installation >40' Above Floor, Add	*18.14*	
26 05 33 13-0632	EA	4" Electrical Metallic Tubing (EMT) 45 Degree Elbow	122.91	36.39
		For Work In Restricted Working Space, Add	*27.29*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.10*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.20*	
		For Elevated Installation >20' To 25' Above Floor, Add	*22.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*31.84*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.39*	
		For Elevated Installation >35' To 40' Above Floor, Add	*45.49*	
		For Elevated Installation >40' Above Floor, Add	*50.04*	

26 05 33 13-0633 Electrical Metallic Tubing (EMT) Set Screw Couplings *(26 05 33 13-0599)*

26 05 33 13-0634	EA	1/2" Electrical Metallic Tubing (EMT) Set Screw Coupling	5.39	2.48
		For Work In Restricted Working Space, Add	*1.55*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.52*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.03*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.29*	
		For Elevated Installation >25' To 30' Above Floor, Add	*1.80*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.06*	
		For Elevated Installation >35' To 40' Above Floor, Add	*2.58*	
		For Elevated Installation >40' Above Floor, Add	*2.83*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0635	EA	3/4" Electrical Metallic Tubing (EMT) Set Screw Coupling	6.55	2.48
		For Work In Restricted Working Space, Add	*1.86*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.62*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.24*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.55*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.17*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.48*	
		For Elevated Installation >35' To 40' Above Floor, Add	*3.10*	
		For Elevated Installation >40' Above Floor, Add	*3.40*	
26 05 33 13-0636	EA	1" Electrical Metallic Tubing (EMT) Set Screw Coupling	7.76	2.89
		For Work In Restricted Working Space, Add	*2.16*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.72*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.44*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.80*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.52*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.88*	
		For Elevated Installation >35' To 40' Above Floor, Add	*3.61*	
		For Elevated Installation >40' Above Floor, Add	*3.97*	
26 05 33 13-0637	EA	1-1/4" Electrical Metallic Tubing (EMT) Set Screw Coupling	10.47	3.71
		For Work In Restricted Working Space, Add	*2.78*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.93*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.86*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.32*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.25*	
		For Elevated Installation >30' To 35' Above Floor, Add	*3.71*	
		For Elevated Installation >35' To 40' Above Floor, Add	*4.64*	
		For Elevated Installation >40' Above Floor, Add	*5.10*	
26 05 33 13-0638	EA	1-1/2" Electrical Metallic Tubing (EMT) Set Screw Coupling	12.91	4.53
		For Work In Restricted Working Space, Add	*3.40*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.13*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.27*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.84*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.97*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.54*	
		For Elevated Installation >35' To 40' Above Floor, Add	*5.67*	
		For Elevated Installation >40' Above Floor, Add	*6.24*	
26 05 33 13-0639	EA	2" Electrical Metallic Tubing (EMT) Set Screw Coupling	17.55	6.19
		For Work In Restricted Working Space, Add	*4.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.86*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.41*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.73*	
		For Elevated Installation >40' Above Floor, Add	*8.50*	
26 05 33 13-0640	EA	2-1/2" Electrical Metallic Tubing (EMT) Set Screw Coupling	24.29	8.24
		For Work In Restricted Working Space, Add	*6.19*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.06*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.12*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.16*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.22*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.25*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.31*	
		For Elevated Installation >40' Above Floor, Add	*11.34*	
26 05 33 13-0641	EA	3" Electrical Metallic Tubing (EMT) Set Screw Coupling	31.46	9.48
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.88*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
26 05 33 13-0642	EA	3-1/2" Electrical Metallic Tubing (EMT) Set Screw Coupling	35.43	10.31
		For Work In Restricted Working Space, Add	*9.27*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.46*	
		For Elevated Installation >40' Above Floor, Add	*17.00*	
26 05 33 13-0643	EA	4" Electrical Metallic Tubing (EMT) Set Screw Coupling	105.66	30.16
		For Work In Restricted Working Space, Add	*29.28*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.76*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.52*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.40*	
		For Elevated Installation >25' To 30' Above Floor, Add	*34.16*	
		For Elevated Installation >30' To 35' Above Floor, Add	*39.04*	
		For Elevated Installation >35' To 40' Above Floor, Add	*48.81*	
		For Elevated Installation >40' Above Floor, Add	*53.69*	

26 05 33 13-0644 Electrical Metallic Tubing (EMT) Compression Couplings *(26 05 33 13-0599)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0645	EA	1/2 Electrical Metallic Tubing (EMT) Compression Coupling	6.79	2.48
		For Work In Restricted Working Space, Add	*1.86*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.62*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.24*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.55*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.17*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.48*	
		For Elevated Installation >35' To 40' Above Floor, Add	*3.10*	
		For Elevated Installation >40' Above Floor, Add	*3.40*	
26 05 33 13-0646	EA	3/4" Electrical Metallic Tubing (EMT) Compression Coupling	7.87	2.89
		For Work In Restricted Working Space, Add	*2.16*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.72*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.44*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.80*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.52*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.88*	
		For Elevated Installation >35' To 40' Above Floor, Add	*3.61*	
		For Elevated Installation >40' Above Floor, Add	*3.97*	
26 05 33 13-0647	EA	1" Electrical Metallic Tubing (EMT) Compression Coupling	11.23	4.12
		For Work In Restricted Working Space, Add	*3.09*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.03*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.06*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.58*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.61*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*5.16*	
		For Elevated Installation >40' Above Floor, Add	*5.67*	
26 05 33 13-0648	EA	1-1/4" Electrical Metallic Tubing (EMT) Compression Coupling	14.29	4.94
		For Work In Restricted Working Space, Add	*3.71*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.47*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.09*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.33*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.94*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.18*	
		For Elevated Installation >40' Above Floor, Add	*6.80*	
26 05 33 13-0649	EA	1-1/2" Electrical Metallic Tubing (EMT) Compression Coupling	17.14	5.78
		For Work In Restricted Working Space, Add	*4.33*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.44*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.89*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.61*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.05*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.77*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.22*	
		For Elevated Installation >40' Above Floor, Add	*7.94*	
26 05 33 13-0650	EA	2" Electrical Metallic Tubing (EMT) Compression Coupling	22.81	7.42
		For Work In Restricted Working Space, Add	*5.57*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.86*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.71*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.64*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.49*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.42*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.28*	
		For Elevated Installation >40' Above Floor, Add	*10.20*	
26 05 33 13-0651	EA	2-1/2" Electrical Metallic Tubing (EMT) Compression Coupling	35.87	9.90
		For Work In Restricted Working Space, Add	*7.42*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.47*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.95*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.18*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.66*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.89*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.37*	
		For Elevated Installation >40' Above Floor, Add	*13.60*	
26 05 33 13-0652	EA	3" Electrical Metallic Tubing (EMT) Compression Coupling	41.52	11.54
		For Work In Restricted Working Space, Add	*8.66*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.77*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.54*	
		For Elevated Installation >35' To 40' Above Floor, Add	*14.43*	
		For Elevated Installation >40' Above Floor, Add	*15.87*	
26 05 33 13-0653	EA	3-1/2" Electrical Metallic Tubing (EMT) Compression Coupling	51.91	14.43
		For Work In Restricted Working Space, Add	*10.82*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.61*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.21*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*12.62*	
		For Elevated Installation >30' To 35' Above Floor, Add	*14.43*	
		For Elevated Installation >35' To 40' Above Floor, Add	*18.04*	
		For Elevated Installation >40' Above Floor, Add	*19.84*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0654	EA	4" Electrical Metallic Tubing (EMT) Compression Coupling	66.58	18.55
		For Work In Restricted Working Space, Add	*13.91*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.64*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.60*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.55*	
		For Elevated Installation >35' To 40' Above Floor, Add	*23.19*	
		For Elevated Installation >40' Above Floor, Add	*25.51*	

26 05 33 13-0655 Electrical Metallic Tubing (EMT) Raintight Compression Couplings *(26 05 33 13-0599)*

26 05 33 13-0656	EA	1/2 Electrical Metallic Tubing (EMT) Raintight Compression Coupling	7.66	2.48
		For Work In Restricted Working Space, Add	*1.86*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.62*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.24*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.55*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.17*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.48*	
		For Elevated Installation >35' To 40' Above Floor, Add	*3.10*	
		For Elevated Installation >40' Above Floor, Add	*3.40*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1.86*	
26 05 33 13-0657	EA	3/4" Electrical Metallic Tubing (EMT) Raintight Compression Coupling	8.82	2.89
		For Work In Restricted Working Space, Add	*2.16*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.72*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.44*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.80*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.52*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.88*	
		For Elevated Installation >35' To 40' Above Floor, Add	*3.61*	
		For Elevated Installation >40' Above Floor, Add	*3.97*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.16*	
26 05 33 13-0658	EA	1" Electrical Metallic Tubing (EMT) Raintight Compression Coupling	13.04	4.12
		For Work In Restricted Working Space, Add	*3.09*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.03*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.06*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.58*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.61*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*5.16*	
		For Elevated Installation >40' Above Floor, Add	*5.67*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.09*	
26 05 33 13-0659	EA	1-1/4" Electrical Metallic Tubing (EMT) Raintight Compression Coupling	16.48	4.94
		For Work In Restricted Working Space, Add	*3.71*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.47*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.09*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.33*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.94*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.18*	
		For Elevated Installation >40' Above Floor, Add	*6.80*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.71*	
26 05 33 13-0660	EA	1-1/2" Electrical Metallic Tubing (EMT) Raintight Compression Coupling	21.04	5.78
		For Work In Restricted Working Space, Add	*4.33*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.44*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.89*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.61*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.05*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.77*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.22*	
		For Elevated Installation >40' Above Floor, Add	*7.94*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.33*	
26 05 33 13-0661	EA	2" Electrical Metallic Tubing (EMT) Raintight Compression Coupling	25.63	7.01
		For Work In Restricted Working Space, Add	*5.26*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.75*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.50*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.13*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.01*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.76*	
		For Elevated Installation >40' Above Floor, Add	*9.64*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.26*	
26 05 33 13-0662	EA	2-1/2" Electrical Metallic Tubing (EMT) Raintight Compression Coupling	34.49	9.48
		For Work In Restricted Working Space, Add	*7.11*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.93*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.30*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.48*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.85*	
		For Elevated Installation >40' Above Floor, Add	*13.04*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.11*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0663	EA	3" Electrical Metallic Tubing (EMT) Raintight Compression Coupling	43.52	11.54
		For Work In Restricted Working Space, Add	*8.66*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.77*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.54*	
		For Elevated Installation >35' To 40' Above Floor, Add	*14.43*	
		For Elevated Installation >40' Above Floor, Add	*15.87*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.66*	
26 05 33 13-0664	EA	3-1/2" Electrical Metallic Tubing (EMT) Raintight Compression Coupling	57.28	14.43
		For Work In Restricted Working Space, Add	*10.82*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.61*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.21*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*12.62*	
		For Elevated Installation >30' To 35' Above Floor, Add	*14.43*	
		For Elevated Installation >35' To 40' Above Floor, Add	*18.04*	
		For Elevated Installation >40' Above Floor, Add	*19.84*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.82*	
26 05 33 13-0665	EA	4" Electrical Metallic Tubing (EMT) Raintight Compression Coupling	70.09	18.55
		For Work In Restricted Working Space, Add	*13.91*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.64*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.60*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.55*	
		For Elevated Installation >35' To 40' Above Floor, Add	*23.19*	
		For Elevated Installation >40' Above Floor, Add	*25.51*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.91*	

26 05 33 13-0666 Electrical Metallic Tubing (EMT) Insulated Bushing *(26 05 33 13-0599)*

26 05 33 13-0667	EA	1/2" Electrical Metallic Tubing (EMT) Insulated Bushing	6.99	2.78
		For Work In Restricted Working Space, Add	*2.07*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.69*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.38*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.42*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.76*	
		For Elevated Installation >35' To 40' Above Floor, Add	*3.46*	
		For Elevated Installation >40' Above Floor, Add	*3.80*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.07*	
26 05 33 13-0668	EA	3/4" Electrical Metallic Tubing (EMT) Insulated Bushing	7.65	2.99
		For Work In Restricted Working Space, Add	*2.26*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.75*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.50*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*3.01*	
		For Elevated Installation >35' To 40' Above Floor, Add	*3.76*	
		For Elevated Installation >40' Above Floor, Add	*4.14*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.26*	
26 05 33 13-0669	EA	1" Electrical Metallic Tubing (EMT) Insulated Bushing	9.59	3.71
		For Work In Restricted Working Space, Add	*2.75*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.92*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.84*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.30*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.21*	
		For Elevated Installation >30' To 35' Above Floor, Add	*3.67*	
		For Elevated Installation >35' To 40' Above Floor, Add	*4.59*	
		For Elevated Installation >40' Above Floor, Add	*5.05*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.75*	
26 05 33 13-0670	EA	1-1/4" Electrical Metallic Tubing (EMT) Insulated Bushing	12.25	4.74
		For Work In Restricted Working Space, Add	*3.53*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.18*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.35*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.94*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.11*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.70*	
		For Elevated Installation >35' To 40' Above Floor, Add	*5.88*	
		For Elevated Installation >40' Above Floor, Add	*6.46*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.53*	
26 05 33 13-0671	EA	1-1/2" Electrical Metallic Tubing (EMT) Insulated Bushing	14.50	5.46
		For Work In Restricted Working Space, Add	*4.11*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.43*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.80*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.48*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.86*	
		For Elevated Installation >40' Above Floor, Add	*7.54*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.11*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0672	EA	2" Electrical Metallic Tubing (EMT) Insulated Bushing	17.82	6.60
		For Work In Restricted Working Space, Add	*4.95*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.65*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.12*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.77*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.60*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.25*	
		For Elevated Installation >40' Above Floor, Add	*9.07*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.95*	
26 05 33 13-0673	EA	2-1/2" Electrical Metallic Tubing (EMT) Insulated Bushing	25.73	9.18
		For Work In Restricted Working Space, Add	*6.86*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.29*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.57*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.72*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.00*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.15*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.44*	
		For Elevated Installation >40' Above Floor, Add	*12.58*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.86*	
26 05 33 13-0674	EA	3" Electrical Metallic Tubing (EMT) Insulated Bushing	34.14	12.16
		For Work In Restricted Working Space, Add	*9.15*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.05*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.10*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.63*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.68*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.20*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.25*	
		For Elevated Installation >40' Above Floor, Add	*16.78*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.15*	
26 05 33 13-0675	EA	3-1/2" Electrical Metallic Tubing (EMT) Insulated Bushing	43.76	15.66
		For Work In Restricted Working Space, Add	*11.78*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.93*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.85*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.82*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.74*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.71*	
		For Elevated Installation >35' To 40' Above Floor, Add	*19.64*	
		For Elevated Installation >40' Above Floor, Add	*21.60*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.78*	
26 05 33 13-0676	EA	4" Electrical Metallic Tubing (EMT) Insulated Bushing	56.52	20.61
		For Work In Restricted Working Space, Add	*15.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.76*	
		For Elevated Installation >40' Above Floor, Add	*28.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.46*	

26 05 33 13-0677 Electrical Metallic Tubing (EMT) Straight Box Connectors With Set Screw *(26 05 33 13-0599)*

26 05 33 13-0678	EA	1/2" Electrical Metallic Tubing (EMT) Straight Box Connector With Set Screw	5.35	2.07
		For Work In Restricted Working Space, Add	*1.55*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.52*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.03*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.29*	
		For Elevated Installation >25' To 30' Above Floor, Add	*1.80*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.06*	
		For Elevated Installation >35' To 40' Above Floor, Add	*2.58*	
		For Elevated Installation >40' Above Floor, Add	*2.83*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1.55*	
26 05 33 13-0679	EA	3/4" Electrical Metallic Tubing (EMT) Straight Box Connector With Set Screw	6.50	2.48
		For Work In Restricted Working Space, Add	*1.86*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.62*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.24*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.55*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.17*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.48*	
		For Elevated Installation >35' To 40' Above Floor, Add	*3.10*	
		For Elevated Installation >40' Above Floor, Add	*3.40*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1.86*	
26 05 33 13-0680	EA	1" Electrical Metallic Tubing (EMT) Straight Box Connector With Set Screw	7.76	2.89
		For Work In Restricted Working Space, Add	*2.16*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.72*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.44*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.80*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.52*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.88*	
		For Elevated Installation >35' To 40' Above Floor, Add	*3.61*	
		For Elevated Installation >40' Above Floor, Add	*3.97*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.16*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0681	EA	1-1/4" Electrical Metallic Tubing (EMT) Straight Box Connector With Set Screw	11.31	4.12
		For Work In Restricted Working Space, Add	*3.09*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.03*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.06*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.58*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.61*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*5.16*	
		For Elevated Installation >40' Above Floor, Add	*5.67*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.09*	
26 05 33 13-0682	EA	1-1/2" Electrical Metallic Tubing (EMT) Straight Box Connector With Set Screw	13.82	4.94
		For Work In Restricted Working Space, Add	*3.71*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.47*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.09*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.33*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.94*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.18*	
		For Elevated Installation >40' Above Floor, Add	*6.80*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.71*	
26 05 33 13-0683	EA	2" Electrical Metallic Tubing (EMT) Straight Box Connector With Set Screw	17.62	6.19
		For Work In Restricted Working Space, Add	*4.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.87*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.41*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.73*	
		For Elevated Installation >40' Above Floor, Add	*8.50*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.64*	
26 05 33 13-0684	EA	2-1/2" Electrical Metallic Tubing (EMT) Straight Box Connector With Set Screw	26.63	8.24
		For Work In Restricted Working Space, Add	*6.18*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.06*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.12*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.15*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.21*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.24*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.31*	
		For Elevated Installation >40' Above Floor, Add	*11.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.18*	
26 05 33 13-0685	EA	3" Electrical Metallic Tubing (EMT) Straight Box Connector With Set Screw	33.12	10.31
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.88*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	
26 05 33 13-0686	EA	3-1/2" Electrical Metallic Tubing (EMT) Straight Box Connector With Set Screw	39.18	12.36
		For Work In Restricted Working Space, Add	*9.27*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.46*	
		For Elevated Installation >40' Above Floor, Add	*17.00*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.27*	
26 05 33 13-0687	EA	4" Electrical Metallic Tubing (EMT) Straight Box Connector With Set Screw	45.65	14.43
		For Work In Restricted Working Space, Add	*10.82*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.61*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.21*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*12.62*	
		For Elevated Installation >30' To 35' Above Floor, Add	*14.43*	
		For Elevated Installation >35' To 40' Above Floor, Add	*18.04*	
		For Elevated Installation >40' Above Floor, Add	*19.84*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.82*	

26 05 33 13-0688 Electrical Metallic Tubing (EMT) Insulated Straight Box Connectors With Set Screw *(26 05 33 13-0599)*

26 05 33 13-0689	EA	1/2" Electrical Metallic Tubing (EMT) Insulated Straight Box Connector With Set Screw	7.23	2.78
		For Work In Restricted Working Space, Add	*2.07*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.69*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.38*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.42*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.76*	
		For Elevated Installation >35' To 40' Above Floor, Add	*3.46*	
		For Elevated Installation >40' Above Floor, Add	*3.80*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.07*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0690	EA	3/4" Electrical Metallic Tubing (EMT) Insulated Straight Box Connector With Set Screw	8.03	2.99
		For Work In Restricted Working Space, Add	*2.26*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.75*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.50*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*3.01*	
		For Elevated Installation >35' To 40' Above Floor, Add	*3.76*	
		For Elevated Installation >40' Above Floor, Add	*4.14*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.26*	
26 05 33 13-0691	EA	1" Electrical Metallic Tubing (EMT) Insulated Straight Box Connector With Set Screw	10.10	3.71
		For Work In Restricted Working Space, Add	*2.75*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.92*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.84*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.30*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.21*	
		For Elevated Installation >30' To 35' Above Floor, Add	*3.67*	
		For Elevated Installation >35' To 40' Above Floor, Add	*4.59*	
		For Elevated Installation >40' Above Floor, Add	*5.05*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.75*	
26 05 33 13-0692	EA	1-1/4" Electrical Metallic Tubing (EMT) Insulated Straight Box Connector With Set Screw	13.27	4.74
		For Work In Restricted Working Space, Add	*3.53*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.18*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.35*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.94*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.11*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.70*	
		For Elevated Installation >35' To 40' Above Floor, Add	*5.88*	
		For Elevated Installation >40' Above Floor, Add	*6.46*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.53*	
26 05 33 13-0693	EA	1-1/2" Electrical Metallic Tubing (EMT) Insulated Straight Box Connector With Set Screw	15.74	5.46
		For Work In Restricted Working Space, Add	*4.11*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.43*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.80*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.48*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.86*	
		For Elevated Installation >40' Above Floor, Add	*7.54*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.11*	
26 05 33 13-0694	EA	2" Electrical Metallic Tubing (EMT) Insulated Straight Box Connector With Set Screw	19.27	6.60
		For Work In Restricted Working Space, Add	*4.95*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.65*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.12*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.77*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.60*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.25*	
		For Elevated Installation >40' Above Floor, Add	*9.07*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.95*	
26 05 33 13-0695	EA	2-1/2" Electrical Metallic Tubing (EMT) Insulated Straight Box Connector With Set Screw	31.99	9.18
		For Work In Restricted Working Space, Add	*6.86*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.29*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.57*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.72*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.00*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.15*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.44*	
		For Elevated Installation >40' Above Floor, Add	*12.58*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.86*	
26 05 33 13-0696	EA	3" Electrical Metallic Tubing (EMT) Insulated Straight Box Connector With Set Screw	41.40	12.16
		For Work In Restricted Working Space, Add	*9.15*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.05*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.10*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.63*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.68*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.20*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.25*	
		For Elevated Installation >40' Above Floor, Add	*16.78*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.15*	
26 05 33 13-0697	EA	3-1/2" Electrical Metallic Tubing (EMT) Insulated Straight Box Connector With Set Screw	52.90	15.66
		For Work In Restricted Working Space, Add	*11.78*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.93*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.85*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.82*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.74*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.71*	
		For Elevated Installation >35' To 40' Above Floor, Add	*19.64*	
		For Elevated Installation >40' Above Floor, Add	*21.60*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.78*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0698	EA	4" Electrical Metallic Tubing (EMT) Insulated Straight Box Connector With Set Screw	66.52	20.61
		For Work In Restricted Working Space, Add	*15.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.76*	
		For Elevated Installation >40' Above Floor, Add	*28.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.46*	
26 05 33 13-0699		**Electrical Metallic Tubing (EMT) Straight Box Compression Connectors** *(26 05 33 13-0599)*		
26 05 33 13-0700	EA	1/2" Electrical Metallic Tubing (EMT) Straight Box Compression Connector	6.50	2.48
		For Work In Restricted Working Space, Add	*1.86*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.62*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.24*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.55*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.17*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.48*	
		For Elevated Installation >35' To 40' Above Floor, Add	*3.10*	
		For Elevated Installation >40' Above Floor, Add	*3.40*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1.86*	
26 05 33 13-0701	EA	3/4" Electrical Metallic Tubing (EMT) Straight Box Compression Connector	7.68	2.89
		For Work In Restricted Working Space, Add	*2.16*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.72*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.44*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.80*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.52*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.88*	
		For Elevated Installation >35' To 40' Above Floor, Add	*3.61*	
		For Elevated Installation >40' Above Floor, Add	*3.97*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.16*	
26 05 33 13-0702	EA	1" Electrical Metallic Tubing (EMT) Straight Box Compression Connector	10.98	4.12
		For Work In Restricted Working Space, Add	*3.09*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.03*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.06*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.58*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.61*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*5.16*	
		For Elevated Installation >40' Above Floor, Add	*5.67*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.09*	
26 05 33 13-0703	EA	1-1/4" Electrical Metallic Tubing (EMT) Straight Box Compression Connector	13.63	4.94
		For Work In Restricted Working Space, Add	*3.71*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.47*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.09*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.33*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.94*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.18*	
		For Elevated Installation >40' Above Floor, Add	*6.80*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.71*	
26 05 33 13-0704	EA	1-1/2" Electrical Metallic Tubing (EMT) Straight Box Compression Connector	16.21	5.78
		For Work In Restricted Working Space, Add	*4.33*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.44*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.89*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.61*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.05*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.77*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.22*	
		For Elevated Installation >40' Above Floor, Add	*7.94*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.33*	
26 05 33 13-0705	EA	2" Electrical Metallic Tubing (EMT) Straight Box Compression Connector	21.14	7.42
		For Work In Restricted Working Space, Add	*5.57*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.86*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.71*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.64*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.49*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.42*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.28*	
		For Elevated Installation >40' Above Floor, Add	*10.20*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.57*	
26 05 33 13-0706	EA	2-1/2" Electrical Metallic Tubing (EMT) Straight Box Compression Connector	32.52	9.90
		For Work In Restricted Working Space, Add	*7.42*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.47*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.95*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.18*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.66*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.89*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.37*	
		For Elevated Installation >40' Above Floor, Add	*13.60*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.42*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0707	EA	3" Electrical Metallic Tubing (EMT) Straight Box Compression Connector	41.10	12.36
		For Work In Restricted Working Space, Add	*9.27*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.46*	
		For Elevated Installation >40' Above Floor, Add	*17.00*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.27*	
26 05 33 13-0708	EA	3-1/2" Electrical Metallic Tubing (EMT) Straight Box Compression Connector	51.78	14.43
		For Work In Restricted Working Space, Add	*10.82*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.61*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.21*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*12.62*	
		For Elevated Installation >30' To 35' Above Floor, Add	*14.43*	
		For Elevated Installation >35' To 40' Above Floor, Add	*18.04*	
		For Elevated Installation >40' Above Floor, Add	*19.84*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.82*	
26 05 33 13-0709	EA	4" Electrical Metallic Tubing (EMT) Straight Box Compression Connector	58.26	16.49
		For Work In Restricted Working Space, Add	*12.37*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.12*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.24*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.31*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.43*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.49*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.61*	
		For Elevated Installation >40' Above Floor, Add	*22.67*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*12.37*	

26 05 33 13-0710 Electrical Metallic Tubing (EMT) Insulated Straight Box Compression Connectors *(26 05 33 13-0599)*

26 05 33 13-0711	EA	1/2" Electrical Metallic Tubing (EMT) Insulated Straight Box Compression Connector	7.44	2.78
		For Work In Restricted Working Space, Add	*2.07*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.69*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.38*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.42*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.76*	
		For Elevated Installation >35' To 40' Above Floor, Add	*3.46*	
		For Elevated Installation >40' Above Floor, Add	*3.80*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.07*	
26 05 33 13-0712	EA	3/4" Electrical Metallic Tubing (EMT) Insulated Straight Box Compression Connector	8.26	2.99
		For Work In Restricted Working Space, Add	*2.26*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.75*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.50*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*3.01*	
		For Elevated Installation >35' To 40' Above Floor, Add	*3.76*	
		For Elevated Installation >40' Above Floor, Add	*4.14*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.26*	
26 05 33 13-0713	EA	1" Electrical Metallic Tubing (EMT) Insulated Straight Box Compression Connector	10.28	3.71
		For Work In Restricted Working Space, Add	*2.75*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.92*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.84*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.30*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.21*	
		For Elevated Installation >30' To 35' Above Floor, Add	*3.67*	
		For Elevated Installation >35' To 40' Above Floor, Add	*4.59*	
		For Elevated Installation >40' Above Floor, Add	*5.05*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.75*	
26 05 33 13-0714	EA	1-1/4" Electrical Metallic Tubing (EMT) Insulated Straight Box Compression Connector	13.81	4.74
		For Work In Restricted Working Space, Add	*3.53*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.18*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.35*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.94*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.11*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.70*	
		For Elevated Installation >35' To 40' Above Floor, Add	*5.88*	
		For Elevated Installation >40' Above Floor, Add	*6.46*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.53*	
26 05 33 13-0715	EA	1-1/2" Electrical Metallic Tubing (EMT) Insulated Straight Box Compression Connector	16.63	5.46
		For Work In Restricted Working Space, Add	*4.11*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.43*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.80*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.48*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.86*	
		For Elevated Installation >40' Above Floor, Add	*7.54*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.11*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0716	EA	2" Electrical Metallic Tubing (EMT) Insulated Straight Box Compression Connector	20.56	6.60
		For Work In Restricted Working Space, Add	*4.95*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.65*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.12*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.77*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.60*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.25*	
		For Elevated Installation >40' Above Floor, Add	*9.07*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.95*	
26 05 33 13-0717	EA	2-1/2" Electrical Metallic Tubing (EMT) Insulated Straight Box Compression Connector	36.69	9.18
		For Work In Restricted Working Space, Add	*6.86*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.29*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.57*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.72*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.00*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.15*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.44*	
		For Elevated Installation >40' Above Floor, Add	*12.58*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.86*	
26 05 33 13-0718	EA	3" Electrical Metallic Tubing (EMT) Insulated Straight Box Compression Connector	49.30	12.16
		For Work In Restricted Working Space, Add	*9.15*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.05*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.10*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.63*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.68*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.20*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.25*	
		For Elevated Installation >40' Above Floor, Add	*16.78*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.15*	
26 05 33 13-0719	EA	3-1/2" Electrical Metallic Tubing (EMT) Insulated Straight Box Compression Connector	66.74	15.66
		For Work In Restricted Working Space, Add	*11.78*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.93*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.85*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.82*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.74*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.71*	
		For Elevated Installation >35' To 40' Above Floor, Add	*19.64*	
		For Elevated Installation >40' Above Floor, Add	*21.60*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.78*	
26 05 33 13-0720	EA	4" Electrical Metallic Tubing (EMT) Insulated Straight Box Compression Connector	83.65	20.61
		For Work In Restricted Working Space, Add	*15.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.76*	
		For Elevated Installation >40' Above Floor, Add	*28.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.46*	

26 05 33 13-0721 Electrical Metallic Tubing (EMT) Expansion Coupling *(26 05 33 13-0599)*

Note: Excludes jumper.

26 05 33 13-0722	EA	1/2" Electrical Metallic Tubing (EMT) Expansion Coupling	56.08	13.71
		For Work In Restricted Working Space, Add	*10.29*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.43*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.86*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.57*	
		For Elevated Installation >25' To 30' Above Floor, Add	*12.00*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.72*	
		For Elevated Installation >35' To 40' Above Floor, Add	*17.15*	
		For Elevated Installation >40' Above Floor, Add	*18.86*	
26 05 33 13-0723	EA	3/4" Electrical Metallic Tubing (EMT) Expansion Coupling	67.57	16.60
		For Work In Restricted Working Space, Add	*12.47*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.16*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.31*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.39*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.55*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.63*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.79*	
		For Elevated Installation >40' Above Floor, Add	*22.86*	
26 05 33 13-0724	EA	1" Electrical Metallic Tubing (EMT) Expansion Coupling	83.00	20.82
		For Work In Restricted Working Space, Add	*15.59*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.20*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.39*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.99*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.19*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.78*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.98*	
		For Elevated Installation >40' Above Floor, Add	*28.58*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0725	EA	1-1/4" Electrical Metallic Tubing (EMT) Expansion Coupling	107.40	25.56
		For Work In Restricted Working Space, Add	*19.18*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.39*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.78*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.98*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.37*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.57*	
		For Elevated Installation >35' To 40' Above Floor, Add	*31.96*	
		For Elevated Installation >40' Above Floor, Add	*35.16*	
26 05 33 13-0726	EA	1-1/2" Electrical Metallic Tubing (EMT) Expansion Coupling	133.57	29.99
		For Work In Restricted Working Space, Add	*22.49*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.50*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.99*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*26.24*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.99*	
		For Elevated Installation >35' To 40' Above Floor, Add	*37.49*	
		For Elevated Installation >40' Above Floor, Add	*41.23*	
26 05 33 13-0727	EA	2" Electrical Metallic Tubing (EMT) Expansion Coupling	167.49	36.48
		For Work In Restricted Working Space, Add	*27.39*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.13*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.26*	
		For Elevated Installation >20' To 25' Above Floor, Add	*22.82*	
		For Elevated Installation >25' To 30' Above Floor, Add	*31.95*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.52*	
		For Elevated Installation >35' To 40' Above Floor, Add	*45.65*	
		For Elevated Installation >40' Above Floor, Add	*50.21*	
26 05 33 13-0728	EA	2-1/2" Electrical Metallic Tubing (EMT) Expansion Coupling	321.22	46.89
		For Work In Restricted Working Space, Add	*35.18*	
		For Elevated Installation >10' To 15' Above Floor, Add	*11.73*	
		For Elevated Installation >15' To 20' Above Floor, Add	*23.45*	
		For Elevated Installation >20' To 25' Above Floor, Add	*29.31*	
		For Elevated Installation >25' To 30' Above Floor, Add	*41.04*	
		For Elevated Installation >30' To 35' Above Floor, Add	*46.90*	
		For Elevated Installation >35' To 40' Above Floor, Add	*58.63*	
		For Elevated Installation >40' Above Floor, Add	*64.49*	
26 05 33 13-0729	EA	3" Electrical Metallic Tubing (EMT) Expansion Coupling	393.04	54.82
		For Work In Restricted Working Space, Add	*41.13*	
		For Elevated Installation >10' To 15' Above Floor, Add	*13.71*	
		For Elevated Installation >15' To 20' Above Floor, Add	*27.42*	
		For Elevated Installation >20' To 25' Above Floor, Add	*34.28*	
		For Elevated Installation >25' To 30' Above Floor, Add	*47.99*	
		For Elevated Installation >30' To 35' Above Floor, Add	*54.84*	
		For Elevated Installation >35' To 40' Above Floor, Add	*68.55*	
		For Elevated Installation >40' Above Floor, Add	*75.41*	
26 05 33 13-0730	EA	3-1/2" Electrical Metallic Tubing (EMT) Expansion Coupling	483.21	59.77
		For Work In Restricted Working Space, Add	*44.84*	
		For Elevated Installation >10' To 15' Above Floor, Add	*14.95*	
		For Elevated Installation >15' To 20' Above Floor, Add	*29.89*	
		For Elevated Installation >20' To 25' Above Floor, Add	*37.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*52.31*	
		For Elevated Installation >30' To 35' Above Floor, Add	*59.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*74.74*	
		For Elevated Installation >40' Above Floor, Add	*82.21*	
26 05 33 13-0731	EA	4" Electrical Metallic Tubing (EMT) Expansion Coupling	522.91	65.95
		For Work In Restricted Working Space, Add	*49.48*	
		For Elevated Installation >10' To 15' Above Floor, Add	*16.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*32.99*	
		For Elevated Installation >20' To 25' Above Floor, Add	*41.23*	
		For Elevated Installation >25' To 30' Above Floor, Add	*57.73*	
		For Elevated Installation >30' To 35' Above Floor, Add	*65.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*82.47*	
		For Elevated Installation >40' Above Floor, Add	*90.71*	

26 05 33 13-0732 Electrical Metallic Tubing (EMT) To Flexible Conduit Compression Adapters

(26 05 33 13-0599)

26 05 33 13-0733	EA	1/2" To 3/8" Electrical Metallic Tubing (EMT) To Flexible Conduit Compression Adapter	10.47	3.71
		For Work In Restricted Working Space, Add	*2.75*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.92*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.83*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.29*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.20*	
		For Elevated Installation >30' To 35' Above Floor, Add	*3.66*	
		For Elevated Installation >35' To 40' Above Floor, Add	*4.58*	
		For Elevated Installation >40' Above Floor, Add	*5.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.75*	
26 05 33 13-0734	EA	1/2" Electrical Metallic Tubing (EMT) To Flexible Conduit Compression Adapter	11.18	3.71
		For Work In Restricted Working Space, Add	*2.75*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.92*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.83*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.29*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.20*	
		For Elevated Installation >30' To 35' Above Floor, Add	*3.66*	
		For Elevated Installation >35' To 40' Above Floor, Add	*4.58*	
		For Elevated Installation >40' Above Floor, Add	*5.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.75*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0735	EA	3/4" Electrical Metallic Tubing (EMT) To Flexible Conduit Compression Adapter	12.50	4.02
		For Work In Restricted Working Space, Add	*3.05*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.02*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.03*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.54*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.56*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.07*	
		For Elevated Installation >35' To 40' Above Floor, Add	*5.09*	
		For Elevated Installation >40' Above Floor, Add	*5.59*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.05*	
26 05 33 13-0736	EA	1" Electrical Metallic Tubing (EMT) To Flexible Conduit Compression Adapter	14.55	4.63
		For Work In Restricted Working Space, Add	*3.47*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.16*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.31*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.89*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.05*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.63*	
		For Elevated Installation >35' To 40' Above Floor, Add	*5.79*	
		For Elevated Installation >40' Above Floor, Add	*6.36*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.47*	
26 05 33 13-0737	EA	1-1/4" Electrical Metallic Tubing (EMT) To Flexible Conduit Compression Adapter	20.75	5.57
		For Work In Restricted Working Space, Add	*4.20*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.40*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.80*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.50*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.90*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.60*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.00*	
		For Elevated Installation >40' Above Floor, Add	*7.69*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.20*	
26 05 33 13-0738	EA	1-1/2" Electrical Metallic Tubing (EMT) To Flexible Conduit Compression Adapter	25.40	6.39
		For Work In Restricted Working Space, Add	*4.80*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.60*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.20*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.00*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.60*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.00*	
		For Elevated Installation >40' Above Floor, Add	*8.79*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.80*	
26 05 33 13-0739	EA	2" Electrical Metallic Tubing (EMT) To Flexible Conduit Compression Adapter	33.12	8.04
		For Work In Restricted Working Space, Add	*6.00*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.00*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.00*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.00*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.00*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.00*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.00*	
		For Elevated Installation >40' Above Floor, Add	*10.99*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.00*	

26 05 33 13-0740 Electrical Metallic Tubing (EMT) Pulling Elbows *(26 05 33 13-0599)*

26 05 33 13-0741	EA	1/2" Electrical Metallic Tubing (EMT) Pulling Elbow With Set Screws	21.97	9.28
		For Work In Restricted Working Space, Add	*5.57*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.71*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.57*	
26 05 33 13-0742	EA	3/4" Electrical Metallic Tubing (EMT) Pulling Elbow With Set Screws	25.60	10.82
		For Work In Restricted Working Space, Add	*6.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.33*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.49*	
26 05 33 13-0743	EA	1" Electrical Metallic Tubing (EMT) Pulling Elbow With Set Screws	31.81	12.36
		For Work In Restricted Working Space, Add	*7.42*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.95*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.42*	
26 05 33 13-0744	EA	1-1/4" Electrical Metallic Tubing (EMT) Pulling Elbow With Set Screws	40.65	15.46
		For Work In Restricted Working Space, Add	*9.27*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.18*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.27*	

26 05 33 13-0745 Intermediate Metal Conduit (IMC) *(26 05 33 13-0059)*

Note: Exposed installation, branch and feeder conduit. Excludes supporting strap, hanger and fastening.

26 05 33 13-0746 Intermediate Metal Conduit (IMC) Conduit *(26 05 33 13-0745)*

Note: Includes field bending conduit up to and including 1". See CSI section 26 05 33 13-2319 for field bending >1".

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0747	LF	1/2" Intermediate Metal Conduit (IMC) Conduit	7.64	2.07
		For >250 To 500, Deduct	*-0.11*	
		For >500 To 1,000, Deduct	*-0.17*	
		For >1,000, Deduct	*-0.23*	
		For Installation In Metal Stud Wall, Add	*0.54*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*1.34*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*0.80*	
		For Work In Restricted Working Space, Add	*1.61*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.54*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.07*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.34*	
		For Elevated Installation >25' To 30' Above Floor, Add	*1.87*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.14*	
		For Elevated Installation >35' To 40' Above Floor, Add	*2.68*	
		For Elevated Installation >40' Above Floor, Add	*2.94*	
26 05 33 13-0748	LF	3/4" Intermediate Metal Conduit (IMC) Conduit	9.12	2.27
		For >250 To 500, Deduct	*-0.14*	
		For >500 To 1,000, Deduct	*-0.20*	
		For >1,000, Deduct	*-0.27*	
		For Installation In Metal Stud Wall, Add	*0.64*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*1.60*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*0.96*	
		For Work In Restricted Working Space, Add	*1.92*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.64*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.60*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.24*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.56*	
		For Elevated Installation >35' To 40' Above Floor, Add	*3.20*	
		For Elevated Installation >40' Above Floor, Add	*3.51*	
26 05 33 13-0749	LF	1" Intermediate Metal Conduit (IMC) Conduit	12.25	2.48
		For >250 To 500, Deduct	*-0.21*	
		For >500 To 1,000, Deduct	*-0.32*	
		For >1,000, Deduct	*-0.42*	
		For Installation In Metal Stud Wall, Add	*0.80*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*2.01*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*1.21*	
		For Work In Restricted Working Space, Add	*2.41*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.80*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.61*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.01*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.81*	
		For Elevated Installation >30' To 35' Above Floor, Add	*3.22*	
		For Elevated Installation >35' To 40' Above Floor, Add	*4.02*	
		For Elevated Installation >40' Above Floor, Add	*4.42*	
26 05 33 13-0750	LF	1-1/4" Intermediate Metal Conduit (IMC) Conduit	14.20	4.94
		For >250 To 500, Deduct	*-0.27*	
		For >500 To 1,000, Deduct	*-0.40*	
		For >1,000, Deduct	*-0.53*	
		For Installation In Metal Stud Wall, Add	*0.89*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*2.22*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*1.33*	
		For Work In Restricted Working Space, Add	*2.66*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.77*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*3.54*	
		For Elevated Installation >35' To 40' Above Floor, Add	*4.43*	
		For Elevated Installation >40' Above Floor, Add	*4.87*	
26 05 33 13-0751	LF	1-1/2" Intermediate Metal Conduit (IMC) Conduit	15.99	3.30
		For >250 To 500, Deduct	*-0.32*	
		For >500 To 1,000, Deduct	*-0.47*	
		For >1,000, Deduct	*-0.63*	
		For Installation In Metal Stud Wall, Add	*0.97*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*2.42*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*1.45*	
		For Work In Restricted Working Space, Add	*2.91*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.97*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.94*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.39*	
		For Elevated Installation >30' To 35' Above Floor, Add	*3.88*	
		For Elevated Installation >35' To 40' Above Floor, Add	*4.85*	
		For Elevated Installation >40' Above Floor, Add	*5.33*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0752	LF	2" Intermediate Metal Conduit (IMC) Conduit	20.29	3.71
		For >250 To 500, Deduct	*-0.43*	
		For >500 To 1,000, Deduct	*-0.64*	
		For >1,000, Deduct	*-0.85*	
		For Installation In Metal Stud Wall, Add	*1.18*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*2.94*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*1.76*	
		For Work In Restricted Working Space, Add	*3.53*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.18*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.35*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.94*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.11*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.70*	
		For Elevated Installation >35' To 40' Above Floor, Add	*5.88*	
		For Elevated Installation >40' Above Floor, Add	*6.46*	
26 05 33 13-0753	LF	2-1/2" Intermediate Metal Conduit (IMC) Conduit	34.50	4.94
		For >250 To 500, Deduct	*-0.95*	
		For >500 To 1,000, Deduct	*-1.42*	
		For >1,000, Deduct	*-1.89*	
		For Installation In Metal Stud Wall, Add	*1.56*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*3.89*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*2.33*	
		For Work In Restricted Working Space, Add	*4.67*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.56*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.11*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.89*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.45*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.22*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.78*	
		For Elevated Installation >40' Above Floor, Add	*8.56*	
26 05 33 13-0754	LF	3" Intermediate Metal Conduit (IMC) Conduit	43.92	6.19
		For >250 To 500, Deduct	*-1.17*	
		For >500 To 1,000, Deduct	*-1.75*	
		For >1,000, Deduct	*-2.33*	
		For Installation In Metal Stud Wall, Add	*2.06*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*5.15*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*3.09*	
		For Work In Restricted Working Space, Add	*6.18*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.06*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.12*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.15*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.21*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.24*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.31*	
		For Elevated Installation >40' Above Floor, Add	*11.34*	
26 05 33 13-0755	LF	3-1/2" Intermediate Metal Conduit (IMC) Conduit	50.59	7.42
		For >250 To 500, Deduct	*-1.35*	
		For >500 To 1,000, Deduct	*-2.03*	
		For >1,000, Deduct	*-2.70*	
		For Installation In Metal Stud Wall, Add	*2.36*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*5.90*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*3.54*	
		For Work In Restricted Working Space, Add	*7.08*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.36*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.72*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.90*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.26*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.44*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.80*	
		For Elevated Installation >40' Above Floor, Add	*12.97*	
26 05 33 13-0756	LF	4" Intermediate Metal Conduit (IMC) Conduit	59.29	8.65
		For >250 To 500, Deduct	*-1.59*	
		For >500 To 1,000, Deduct	*-2.38*	
		For >1,000, Deduct	*-3.18*	
		For Installation In Metal Stud Wall, Add	*2.75*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*6.88*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*4.13*	
		For Work In Restricted Working Space, Add	*8.26*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.75*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.50*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.01*	
		For Elevated Installation >35' To 40' Above Floor, Add	*13.76*	
		For Elevated Installation >40' Above Floor, Add	*15.14*	

26 05 33 13-0757 Intermediate Metal Conduit (IMC) 90 Degree Elbows *(26 05 33 13-0745)*

See CSI section 26 05 33 13-2319 for conduit field bending.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0758	EA	1/2" Intermediate Metal Conduit (IMC) 90 Degree Elbow	37.66	10.20
		For Work In Restricted Working Space, Add	*7.68*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.56*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.12*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.40*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.96*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.24*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.80*	
		For Elevated Installation >40' Above Floor, Add	*14.07*	
26 05 33 13-0759	EA	3/4" Intermediate Metal Conduit (IMC) 90 Degree Elbow	45.35	12.67
		For Work In Restricted Working Space, Add	*9.54*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.18*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.36*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.95*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.13*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.72*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.91*	
		For Elevated Installation >40' Above Floor, Add	*17.50*	
26 05 33 13-0760	EA	1" Intermediate Metal Conduit (IMC) 90 Degree Elbow	58.05	15.56
		For Work In Restricted Working Space, Add	*11.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.88*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.76*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.70*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.58*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.52*	
		For Elevated Installation >35' To 40' Above Floor, Add	*19.40*	
		For Elevated Installation >40' Above Floor, Add	*21.34*	
26 05 33 13-0761	EA	1-1/4" Intermediate Metal Conduit (IMC) 90 Degree Elbow	72.03	18.03
		For Work In Restricted Working Space, Add	*13.51*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.50*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.01*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.26*	
		For Elevated Installation >25' To 30' Above Floor, Add	*15.76*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.02*	
		For Elevated Installation >35' To 40' Above Floor, Add	*22.52*	
		For Elevated Installation >40' Above Floor, Add	*24.77*	
26 05 33 13-0762	EA	1-1/2" Intermediate Metal Conduit (IMC) 90 Degree Elbow	85.83	20.72
		For Work In Restricted Working Space, Add	*15.51*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.17*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.34*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.93*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.68*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.85*	
		For Elevated Installation >40' Above Floor, Add	*28.44*	
26 05 33 13-0763	EA	2" Intermediate Metal Conduit (IMC) 90 Degree Elbow	106.02	22.77
		For Work In Restricted Working Space, Add	*17.06*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.69*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.38*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*19.91*	
		For Elevated Installation >30' To 35' Above Floor, Add	*22.75*	
		For Elevated Installation >35' To 40' Above Floor, Add	*28.44*	
		For Elevated Installation >40' Above Floor, Add	*31.28*	
26 05 33 13-0764	EA	2-1/2" Intermediate Metal Conduit (IMC) 90 Degree Elbow	154.53	28.44
		For Work In Restricted Working Space, Add	*21.33*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.11*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.22*	
		For Elevated Installation >20' To 25' Above Floor, Add	*17.78*	
		For Elevated Installation >25' To 30' Above Floor, Add	*24.89*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.44*	
		For Elevated Installation >35' To 40' Above Floor, Add	*35.55*	
		For Elevated Installation >40' Above Floor, Add	*39.11*	
26 05 33 13-0765	EA	3" Intermediate Metal Conduit (IMC) 90 Degree Elbow	224.57	38.75
		For Work In Restricted Working Space, Add	*29.06*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.69*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.21*	
		For Elevated Installation >25' To 30' Above Floor, Add	*33.90*	
		For Elevated Installation >30' To 35' Above Floor, Add	*38.74*	
		For Elevated Installation >35' To 40' Above Floor, Add	*48.43*	
		For Elevated Installation >40' Above Floor, Add	*53.27*	
26 05 33 13-0766	EA	3-1/2" Intermediate Metal Conduit (IMC) 90 Degree Elbow	334.73	43.69
		For Work In Restricted Working Space, Add	*32.78*	
		For Elevated Installation >10' To 15' Above Floor, Add	*10.93*	
		For Elevated Installation >15' To 20' Above Floor, Add	*21.85*	
		For Elevated Installation >20' To 25' Above Floor, Add	*27.31*	
		For Elevated Installation >25' To 30' Above Floor, Add	*38.24*	
		For Elevated Installation >30' To 35' Above Floor, Add	*43.70*	
		For Elevated Installation >35' To 40' Above Floor, Add	*54.63*	
		For Elevated Installation >40' Above Floor, Add	*60.09*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0767	EA	4" Intermediate Metal Conduit (IMC) 90 Degree Elbow	403.73	56.89
		For Work In Restricted Working Space, Add	*42.65*	
		For Elevated Installation >10' To 15' Above Floor, Add	*14.22*	
		For Elevated Installation >15' To 20' Above Floor, Add	*28.44*	
		For Elevated Installation >20' To 25' Above Floor, Add	*35.55*	
		For Elevated Installation >25' To 30' Above Floor, Add	*49.76*	
		For Elevated Installation >30' To 35' Above Floor, Add	*56.87*	
		For Elevated Installation >35' To 40' Above Floor, Add	*71.09*	
		For Elevated Installation >40' Above Floor, Add	*78.20*	
26 05 33 13-0768		**Intermediate Metal Conduit (IMC) Bushing Sets With Locknut** *(26 05 33 13-0745)*		
26 05 33 13-0769	EA	1/2" Intermediate Metal Conduit (IMC) Bushing Set With Locknut	14.23	5.35
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.02*	
26 05 33 13-0770	EA	3/4" Intermediate Metal Conduit (IMC) Bushing Set With Locknut	16.88	0.62
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.64*	
26 05 33 13-0771	EA	1" Intermediate Metal Conduit (IMC) Bushing Set With Locknut	21.96	7.83
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.87*	
26 05 33 13-0772	EA	1-1/4" Intermediate Metal Conduit (IMC) Bushing Set With Locknut	26.88	9.48
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.11*	
26 05 33 13-0773	EA	1-1/2" Intermediate Metal Conduit (IMC) Bushing Set With Locknut	30.28	10.31
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	
26 05 33 13-0774	EA	2" Intermediate Metal Conduit (IMC) Bushing Set With Locknut	39.41	12.77
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.59*	
26 05 33 13-0775	EA	2-1/2" Intermediate Metal Conduit (IMC) Bushing Set With Locknut	74.79	20.61
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.46*	
26 05 33 13-0776	EA	3" Intermediate Metal Conduit (IMC) Bushing Set With Locknut	90.76	28.03
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.02*	
26 05 33 13-0777	EA	3-1/2" Intermediate Metal Conduit (IMC) Bushing Set With Locknut	120.87	33.39
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*25.04*	
26 05 33 13-0778	EA	4" Intermediate Metal Conduit (IMC) Bushing Set With Locknut	143.10	38.75
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*29.06*	
26 05 33 13-0779		**Intermediate Metal Conduit (IMC) Erickson Or "Kwik-Couple" Fittings** *(26 05 33 13-0745)*		
		Note: 3-Piece coupling.		
26 05 33 13-0780	EA	1/2" Intermediate Metal Conduit (IMC) Erickson Or "Kwik-Couple" Fitting	47.74	16.49
		For Work In Restricted Working Space, Add	*12.38*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.13*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.25*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.32*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.51*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.64*	
		For Elevated Installation >40' Above Floor, Add	*22.70*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*12.38*	
26 05 33 13-0781	EA	3/4" Intermediate Metal Conduit (IMC) Erickson Or "Kwik-Couple" Fitting	54.40	18.45
		For Work In Restricted Working Space, Add	*13.82*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.61*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.21*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.52*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.12*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.42*	
		For Elevated Installation >35' To 40' Above Floor, Add	*23.03*	
		For Elevated Installation >40' Above Floor, Add	*25.33*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.82*	
26 05 33 13-0782	EA	1" Intermediate Metal Conduit (IMC) Erickson Or "Kwik-Couple" Fitting	67.38	20.51
		For Work In Restricted Working Space, Add	*15.39*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.13*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.26*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.83*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.96*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.52*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.66*	
		For Elevated Installation >40' Above Floor, Add	*28.22*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.39*	
26 05 33 13-0783	EA	1-1/4" Intermediate Metal Conduit (IMC) Erickson Or "Kwik-Couple" Fitting	85.71	22.46
		For Work In Restricted Working Space, Add	*16.84*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.61*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.23*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.04*	
		For Elevated Installation >25' To 30' Above Floor, Add	*19.65*	
		For Elevated Installation >30' To 35' Above Floor, Add	*22.46*	
		For Elevated Installation >35' To 40' Above Floor, Add	*28.07*	
		For Elevated Installation >40' Above Floor, Add	*30.88*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.84*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0784	EA	1-1/2" Intermediate Metal Conduit (IMC) Erickson Or "Kwik-Couple" Fitting	98.54	24.53
		For Work In Restricted Working Space, Add	*18.43*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.14*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.29*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*21.50*	
		For Elevated Installation >30' To 35' Above Floor, Add	*24.57*	
		For Elevated Installation >35' To 40' Above Floor, Add	*30.72*	
		For Elevated Installation >40' Above Floor, Add	*33.79*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*18.43*	
26 05 33 13-0785	EA	2" Intermediate Metal Conduit (IMC) Erickson Or "Kwik-Couple" Fitting	140.74	26.58
		For Work In Restricted Working Space, Add	*19.96*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.65*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.63*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.28*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.26*	
		For Elevated Installation >40' Above Floor, Add	*36.59*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*19.96*	
26 05 33 13-0786	EA	2-1/2" Intermediate Metal Conduit (IMC) Erickson Or "Kwik-Couple" Fitting	241.21	32.98
		For Work In Restricted Working Space, Add	*24.74*	
		For Elevated Installation >10' To 15' Above Floor, Add	*8.25*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*20.61*	
		For Elevated Installation >25' To 30' Above Floor, Add	*28.86*	
		For Elevated Installation >30' To 35' Above Floor, Add	*32.98*	
		For Elevated Installation >35' To 40' Above Floor, Add	*41.23*	
		For Elevated Installation >40' Above Floor, Add	*45.35*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*24.74*	
26 05 33 13-0787	EA	3" Intermediate Metal Conduit (IMC) Erickson Or "Kwik-Couple" Fitting	345.16	41.22
		For Work In Restricted Working Space, Add	*30.92*	
		For Elevated Installation >10' To 15' Above Floor, Add	*10.31*	
		For Elevated Installation >15' To 20' Above Floor, Add	*20.61*	
		For Elevated Installation >20' To 25' Above Floor, Add	*25.76*	
		For Elevated Installation >25' To 30' Above Floor, Add	*36.07*	
		For Elevated Installation >30' To 35' Above Floor, Add	*41.22*	
		For Elevated Installation >35' To 40' Above Floor, Add	*51.53*	
		For Elevated Installation >40' Above Floor, Add	*56.68*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*30.92*	
26 05 33 13-0788	EA	3-1/2" Intermediate Metal Conduit (IMC) Erickson Or "Kwik-Couple" Fitting	512.67	49.47
		For Work In Restricted Working Space, Add	*37.11*	
		For Elevated Installation >10' To 15' Above Floor, Add	*12.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*24.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*30.93*	
		For Elevated Installation >25' To 30' Above Floor, Add	*43.30*	
		For Elevated Installation >30' To 35' Above Floor, Add	*49.48*	
		For Elevated Installation >35' To 40' Above Floor, Add	*61.86*	
		For Elevated Installation >40' Above Floor, Add	*68.04*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*37.11*	
26 05 33 13-0789	EA	4" Intermediate Metal Conduit (IMC) Erickson Or "Kwik-Couple" Fitting	594.36	53.59
		For Work In Restricted Working Space, Add	*40.19*	
		For Elevated Installation >10' To 15' Above Floor, Add	*13.40*	
		For Elevated Installation >15' To 20' Above Floor, Add	*26.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*33.49*	
		For Elevated Installation >25' To 30' Above Floor, Add	*46.89*	
		For Elevated Installation >30' To 35' Above Floor, Add	*53.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*66.98*	
		For Elevated Installation >40' Above Floor, Add	*73.68*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*40.19*	

26 05 33 13-0790 Rigid Galvanized Steel (RGS) Or Intermediate Metal Conduit (IMC) To Electrical Metallic Tubing (EMT) Connectors *(26 05 33 13-0745)*

26 05 33 13-0791	EA	1/2" Rigid Galvanized Steel (RGS) Or Intermediate Metal Conduit (IMC) To Electrical Metallic Tubing (EMT) Connector	27.65	8.24
		For Work In Restricted Working Space, Add	*6.18*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.06*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.12*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.15*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.21*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.24*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.31*	
		For Elevated Installation >40' Above Floor, Add	*11.34*	
26 05 33 13-0792	EA	3/4" Rigid Galvanized Steel (RGS) Or Intermediate Metal Conduit (IMC) To Electrical Metallic Tubing (EMT) Connector	31.00	9.06
		For Work In Restricted Working Space, Add	*6.80*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.27*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.53*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.67*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.93*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.07*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.34*	
		For Elevated Installation >40' Above Floor, Add	*12.47*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0793	EA	1" Rigid Galvanized Steel (RGS) Or Intermediate Metal Conduit (IMC) To Electrical Metallic Tubing (EMT) Connector	35.68	10.31
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.88*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
26 05 33 13-0794	EA	1-1/4" Rigid Galvanized Steel (RGS) Or Intermediate Metal Conduit (IMC) To Electrical Metallic Tubing (EMT) Connector	40.93	11.13
		For Work In Restricted Working Space, Add	*8.35*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.78*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.57*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.96*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.74*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.13*	
		For Elevated Installation >35' To 40' Above Floor, Add	*13.92*	
		For Elevated Installation >40' Above Floor, Add	*15.31*	
26 05 33 13-0795	EA	1-1/2" Rigid Galvanized Steel (RGS) Or Intermediate Metal Conduit (IMC) To Electrical Metallic Tubing (EMT) Connector	49.17	12.36
		For Work In Restricted Working Space, Add	*9.27*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.46*	
		For Elevated Installation >40' Above Floor, Add	*17.00*	
26 05 33 13-0796	EA	2" Rigid Galvanized Steel (RGS) Or Intermediate Metal Conduit (IMC) To Electrical Metallic Tubing (EMT) Connector	61.00	13.61
		For Work In Restricted Working Space, Add	*10.20*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.40*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.80*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.50*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.90*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.60*	
		For Elevated Installation >35' To 40' Above Floor, Add	*17.01*	
		For Elevated Installation >40' Above Floor, Add	*18.71*	
26 05 33 13-0797	EA	2-1/2" Rigid Galvanized Steel (RGS) Or Intermediate Metal Conduit (IMC) To Electrical Metallic Tubing (EMT) Connector	84.48	16.49
		For Work In Restricted Working Space, Add	*12.37*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.12*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.24*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.31*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.43*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.49*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.61*	
		For Elevated Installation >40' Above Floor, Add	*22.67*	
26 05 33 13-0798	EA	3" Rigid Galvanized Steel (RGS) Or Intermediate Metal Conduit (IMC) To Electrical Metallic Tubing (EMT) Connector	104.31	20.61
		For Work In Restricted Working Space, Add	*15.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.76*	
		For Elevated Installation >40' Above Floor, Add	*28.34*	
26 05 33 13-0799	EA	3-1/2" Rigid Galvanized Steel (RGS) Or Intermediate Metal Conduit (IMC) To Electrical Metallic Tubing (EMT) Connector	125.33	24.73
		For Work In Restricted Working Space, Add	*18.55*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.18*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.46*	
		For Elevated Installation >25' To 30' Above Floor, Add	*21.64*	
		For Elevated Installation >30' To 35' Above Floor, Add	*24.73*	
		For Elevated Installation >35' To 40' Above Floor, Add	*30.92*	
		For Elevated Installation >40' Above Floor, Add	*34.01*	
26 05 33 13-0800	EA	4" Rigid Galvanized Steel (RGS) Or Intermediate Metal Conduit (IMC) To Electrical Metallic Tubing (EMT) Connector	142.39	26.79
		For Work In Restricted Working Space, Add	*20.09*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	

26 05 33 13-0801 Intermediate Metal Conduit (IMC) Rain Tight Threaded Hubs *(26 05 33 13-0745)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0802	EA	1/2" Intermediate Metal Conduit (IMC) Rain Tight Threaded Hub	23.56	8.24
		For Work In Restricted Working Space, Add	*6.19*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.06*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.12*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.16*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.22*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.25*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.31*	
		For Elevated Installation >40' Above Floor, Add	*11.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.19*	
26 05 33 13-0803	EA	3/4" Intermediate Metal Conduit (IMC) Rain Tight Threaded Hub	30.17	10.31
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.88*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	
26 05 33 13-0804	EA	1" Intermediate Metal Conduit (IMC) Rain Tight Threaded Hub	37.42	12.36
		For Work In Restricted Working Space, Add	*9.27*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.46*	
		For Elevated Installation >40' Above Floor, Add	*17.00*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.27*	
26 05 33 13-0805	EA	1-1/4" Intermediate Metal Conduit (IMC) Rain Tight Threaded Hub	45.28	14.43
		For Work In Restricted Working Space, Add	*10.82*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.61*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.21*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*12.62*	
		For Elevated Installation >30' To 35' Above Floor, Add	*14.43*	
		For Elevated Installation >35' To 40' Above Floor, Add	*18.04*	
		For Elevated Installation >40' Above Floor, Add	*19.84*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.82*	
26 05 33 13-0806	EA	1-1/2" Intermediate Metal Conduit (IMC) Rain Tight Threaded Hub	53.08	16.49
		For Work In Restricted Working Space, Add	*12.36*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.12*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.24*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.30*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.42*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.48*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.61*	
		For Elevated Installation >40' Above Floor, Add	*22.67*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*12.36*	
26 05 33 13-0807	EA	2" Intermediate Metal Conduit (IMC) Rain Tight Threaded Hub	63.52	18.55
		For Work In Restricted Working Space, Add	*13.91*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.64*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.27*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.59*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.55*	
		For Elevated Installation >35' To 40' Above Floor, Add	*23.19*	
		For Elevated Installation >40' Above Floor, Add	*25.50*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.91*	
26 05 33 13-0808	EA	2-1/2" Intermediate Metal Conduit (IMC) Rain Tight Threaded Hub	80.25	20.61
		For Work In Restricted Working Space, Add	*15.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.76*	
		For Elevated Installation >40' Above Floor, Add	*28.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.46*	
26 05 33 13-0809	EA	3" Intermediate Metal Conduit (IMC) Rain Tight Threaded Hub	95.37	22.67
		For Work In Restricted Working Space, Add	*17.00*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.67*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.33*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.17*	
		For Elevated Installation >25' To 30' Above Floor, Add	*19.83*	
		For Elevated Installation >30' To 35' Above Floor, Add	*22.67*	
		For Elevated Installation >35' To 40' Above Floor, Add	*28.34*	
		For Elevated Installation >40' Above Floor, Add	*31.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*17.00*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0810	EA	3-1/2" Intermediate Metal Conduit (IMC) Rain Tight Threaded Hub	117.15	26.79
		For Work In Restricted Working Space, Add	*20.09*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.09*	
26 05 33 13-0811	EA	4" Intermediate Metal Conduit (IMC) Rain Tight Threaded Hub	135.43	28.86
		For Work In Restricted Working Space, Add	*21.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.21*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.43*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.03*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.25*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.85*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.07*	
		For Elevated Installation >40' Above Floor, Add	*39.67*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.64*	

26 05 33 13-0812 Intermediate Metal Conduit (IMC) Expansion Fittings *(26 05 33 13-0745)*

26 05 33 13-0813	EA	1/2" Intermediate Metal Conduit (IMC) Expansion Fitting	168.24	16.49
		For Work In Restricted Working Space, Add	*12.37*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.12*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.25*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.31*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.43*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.49*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.62*	
		For Elevated Installation >40' Above Floor, Add	*22.68*	
26 05 33 13-0814	EA	3/4" Intermediate Metal Conduit (IMC) Expansion Fitting	186.08	18.55
		For Work In Restricted Working Space, Add	*13.91*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.64*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.27*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.59*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.55*	
		For Elevated Installation >35' To 40' Above Floor, Add	*23.19*	
		For Elevated Installation >40' Above Floor, Add	*25.50*	
26 05 33 13-0815	EA	1" Intermediate Metal Conduit (IMC) Expansion Fitting	206.80	20.61
		For Work In Restricted Working Space, Add	*15.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.31*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.04*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.77*	
		For Elevated Installation >40' Above Floor, Add	*28.34*	
26 05 33 13-0816	EA	1-1/4" Intermediate Metal Conduit (IMC) Expansion Fitting	250.36	22.67
		For Work In Restricted Working Space, Add	*17.00*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.67*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.34*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.17*	
		For Elevated Installation >25' To 30' Above Floor, Add	*19.84*	
		For Elevated Installation >30' To 35' Above Floor, Add	*22.67*	
		For Elevated Installation >35' To 40' Above Floor, Add	*28.34*	
		For Elevated Installation >40' Above Floor, Add	*31.17*	
26 05 33 13-0817	EA	1-1/2" Intermediate Metal Conduit (IMC) Expansion Fitting	307.51	24.73
		For Work In Restricted Working Space, Add	*18.55*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.18*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.46*	
		For Elevated Installation >25' To 30' Above Floor, Add	*21.64*	
		For Elevated Installation >30' To 35' Above Floor, Add	*24.73*	
		For Elevated Installation >35' To 40' Above Floor, Add	*30.92*	
		For Elevated Installation >40' Above Floor, Add	*34.01*	
26 05 33 13-0818	EA	2" Intermediate Metal Conduit (IMC) Expansion Fitting	405.76	26.79
		For Work In Restricted Working Space, Add	*20.09*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.39*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.83*	
26 05 33 13-0819	EA	2-1/2" Intermediate Metal Conduit (IMC) Expansion Fitting	614.61	32.98
		For Work In Restricted Working Space, Add	*24.74*	
		For Elevated Installation >10' To 15' Above Floor, Add	*8.25*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*20.61*	
		For Elevated Installation >25' To 30' Above Floor, Add	*28.86*	
		For Elevated Installation >30' To 35' Above Floor, Add	*32.98*	
		For Elevated Installation >35' To 40' Above Floor, Add	*41.23*	
		For Elevated Installation >40' Above Floor, Add	*45.35*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0820	EA	3" Intermediate Metal Conduit (IMC) Expansion Fitting	738.48	41.22
		For Work In Restricted Working Space, Add	*30.92*	
		For Elevated Installation >10' To 15' Above Floor, Add	*10.31*	
		For Elevated Installation >15' To 20' Above Floor, Add	*20.61*	
		For Elevated Installation >20' To 25' Above Floor, Add	*25.76*	
		For Elevated Installation >25' To 30' Above Floor, Add	*36.07*	
		For Elevated Installation >30' To 35' Above Floor, Add	*41.22*	
		For Elevated Installation >35' To 40' Above Floor, Add	*51.53*	
		For Elevated Installation >40' Above Floor, Add	*56.68*	
26 05 33 13-0821	EA	3-1/2" Intermediate Metal Conduit (IMC) Expansion Fitting	1,031.45	49.47
		For Work In Restricted Working Space, Add	*37.10*	
		For Elevated Installation >10' To 15' Above Floor, Add	*12.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*24.73*	
		For Elevated Installation >20' To 25' Above Floor, Add	*30.92*	
		For Elevated Installation >25' To 30' Above Floor, Add	*43.28*	
		For Elevated Installation >30' To 35' Above Floor, Add	*49.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*61.84*	
		For Elevated Installation >40' Above Floor, Add	*68.02*	
26 05 33 13-0822	EA	4" Intermediate Metal Conduit (IMC) Expansion Fitting	1,193.83	53.59
		For Work In Restricted Working Space, Add	*40.19*	
		For Elevated Installation >10' To 15' Above Floor, Add	*13.40*	
		For Elevated Installation >15' To 20' Above Floor, Add	*26.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*33.49*	
		For Elevated Installation >25' To 30' Above Floor, Add	*46.89*	
		For Elevated Installation >30' To 35' Above Floor, Add	*53.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*66.98*	
		For Elevated Installation >40' Above Floor, Add	*73.68*	

26 05 33 13-0823 Intermediate Metal Conduit (IMC) Sealing Fittings, Vertical/Horizontal *(26 05 33 13-0745)*

26 05 33 13-0824	EA	1/2" Intermediate Metal Conduit (IMC) Sealing Fitting, Vertical/Horizontal	100.39	25.76
		For Work In Restricted Working Space, Add	*15.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.76*	
		For Elevated Installation >40' Above Floor, Add	*28.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.46*	
26 05 33 13-0825	EA	3/4" Intermediate Metal Conduit (IMC) Sealing Fitting, Vertical/Horizontal	119.23	30.91
		For Work In Restricted Working Space, Add	*18.55*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.18*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.46*	
		For Elevated Installation >25' To 30' Above Floor, Add	*21.64*	
		For Elevated Installation >30' To 35' Above Floor, Add	*24.73*	
		For Elevated Installation >35' To 40' Above Floor, Add	*30.92*	
		For Elevated Installation >40' Above Floor, Add	*34.01*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*18.55*	
26 05 33 13-0826	EA	1" Intermediate Metal Conduit (IMC) Sealing Fitting, Vertical/Horizontal	145.91	36.07
		For Work In Restricted Working Space, Add	*21.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.21*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.43*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.04*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.25*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.86*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.07*	
		For Elevated Installation >40' Above Floor, Add	*39.68*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.64*	
26 05 33 13-0827	EA	1-1/4" Intermediate Metal Conduit (IMC) Sealing Fitting, Vertical/Horizontal	172.03	41.22
		For Work In Restricted Working Space, Add	*24.74*	
		For Elevated Installation >10' To 15' Above Floor, Add	*8.25*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*20.61*	
		For Elevated Installation >25' To 30' Above Floor, Add	*28.86*	
		For Elevated Installation >30' To 35' Above Floor, Add	*32.98*	
		For Elevated Installation >35' To 40' Above Floor, Add	*41.23*	
		For Elevated Installation >40' Above Floor, Add	*45.35*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*24.74*	
26 05 33 13-0828	EA	1-1/2" Intermediate Metal Conduit (IMC) Sealing Fitting, Vertical/Horizontal	227.61	46.38
		For Work In Restricted Working Space, Add	*27.82*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.27*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.55*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.19*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.46*	
		For Elevated Installation >30' To 35' Above Floor, Add	*37.10*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.37*	
		For Elevated Installation >40' Above Floor, Add	*51.01*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.82*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0829	EA	2" Intermediate Metal Conduit (IMC) Sealing Fitting, Vertical/Horizontal	277.79	51.52
		For Work In Restricted Working Space, Add	*30.92*	
		For Elevated Installation >10' To 15' Above Floor, Add	*10.31*	
		For Elevated Installation >15' To 20' Above Floor, Add	*20.61*	
		For Elevated Installation >20' To 25' Above Floor, Add	*25.76*	
		For Elevated Installation >25' To 30' Above Floor, Add	*36.07*	
		For Elevated Installation >30' To 35' Above Floor, Add	*41.22*	
		For Elevated Installation >35' To 40' Above Floor, Add	*51.53*	
		For Elevated Installation >40' Above Floor, Add	*56.68*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*30.92*	
26 05 33 13-0830	EA	2-1/2" Intermediate Metal Conduit (IMC) Sealing Fitting, Vertical/Horizontal	395.15	61.83
		For Work In Restricted Working Space, Add	*37.10*	
		For Elevated Installation >10' To 15' Above Floor, Add	*12.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*24.73*	
		For Elevated Installation >20' To 25' Above Floor, Add	*30.92*	
		For Elevated Installation >25' To 30' Above Floor, Add	*43.28*	
		For Elevated Installation >30' To 35' Above Floor, Add	*49.46*	
		For Elevated Installation >35' To 40' Above Floor, Add	*61.83*	
		For Elevated Installation >40' Above Floor, Add	*68.01*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*37.10*	
26 05 33 13-0831	EA	3" Intermediate Metal Conduit (IMC) Sealing Fitting, Vertical/Horizontal	475.90	72.14
		For Work In Restricted Working Space, Add	*43.28*	
		For Elevated Installation >10' To 15' Above Floor, Add	*14.43*	
		For Elevated Installation >15' To 20' Above Floor, Add	*28.85*	
		For Elevated Installation >20' To 25' Above Floor, Add	*36.07*	
		For Elevated Installation >25' To 30' Above Floor, Add	*50.49*	
		For Elevated Installation >30' To 35' Above Floor, Add	*57.71*	
		For Elevated Installation >35' To 40' Above Floor, Add	*72.14*	
		For Elevated Installation >40' Above Floor, Add	*79.35*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*43.28*	
26 05 33 13-0832	EA	3-1/2" Intermediate Metal Conduit (IMC) Sealing Fitting, Vertical/Horizontal	1,121.33	82.45
		For Work In Restricted Working Space, Add	*49.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*16.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*32.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*41.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*57.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*65.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*82.44*	
		For Elevated Installation >40' Above Floor, Add	*90.68*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*49.46*	
26 05 33 13-0833	EA	4" Intermediate Metal Conduit (IMC) Sealing Fitting, Vertical/Horizontal	1,292.45	92.74
		For Work In Restricted Working Space, Add	*55.65*	
		For Elevated Installation >10' To 15' Above Floor, Add	*18.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*37.10*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.93*	
		For Elevated Installation >30' To 35' Above Floor, Add	*74.20*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.75*	
		For Elevated Installation >40' Above Floor, Add	*102.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*55.65*	
26 05 33 13-0834		**Intermediate Metal Conduit (IMC) Threaded Couplings** *(26 05 33 13-0745)*		
26 05 33 13-0835	EA	1/2" Intermediate Metal Conduit (IMC) Threaded Coupling	14.03	4.94
		For Work In Restricted Working Space, Add	*3.71*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.47*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.09*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.33*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.94*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.18*	
		For Elevated Installation >40' Above Floor, Add	*6.80*	
26 05 33 13-0836	EA	3/4" Intermediate Metal Conduit (IMC) Threaded Coupling	19.55	7.01
		For Work In Restricted Working Space, Add	*5.26*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.75*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.51*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.14*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.01*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.77*	
		For Elevated Installation >40' Above Floor, Add	*9.64*	
26 05 33 13-0837	EA	1" Intermediate Metal Conduit (IMC) Threaded Coupling	25.67	9.06
		For Work In Restricted Working Space, Add	*6.80*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.27*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.53*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.66*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.93*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.06*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.33*	
		For Elevated Installation >40' Above Floor, Add	*12.46*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0838	EA	1-1/4" Intermediate Metal Conduit (IMC) Threaded Coupling	29.54	10.31
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.31*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.89*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
26 05 33 13-0839	EA	1-1/2" Intermediate Metal Conduit (IMC) Threaded Coupling	35.66	12.36
		For Work In Restricted Working Space, Add	*9.27*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.45*	
		For Elevated Installation >40' Above Floor, Add	*17.00*	
26 05 33 13-0840	EA	2" Intermediate Metal Conduit (IMC) Threaded Coupling	41.32	14.02
		For Work In Restricted Working Space, Add	*10.52*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.51*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.01*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.76*	
		For Elevated Installation >25' To 30' Above Floor, Add	*12.27*	
		For Elevated Installation >30' To 35' Above Floor, Add	*14.02*	
		For Elevated Installation >35' To 40' Above Floor, Add	*17.53*	
		For Elevated Installation >40' Above Floor, Add	*19.28*	
26 05 33 13-0841	EA	2-1/2" Intermediate Metal Conduit (IMC) Threaded Coupling	53.04	15.66
		For Work In Restricted Working Space, Add	*11.75*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.92*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.83*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.79*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.70*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.66*	
		For Elevated Installation >35' To 40' Above Floor, Add	*19.58*	
		For Elevated Installation >40' Above Floor, Add	*21.53*	
26 05 33 13-0842	EA	3" Intermediate Metal Conduit (IMC) Threaded Coupling	63.29	17.73
		For Work In Restricted Working Space, Add	*13.30*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.43*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.86*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.08*	
		For Elevated Installation >25' To 30' Above Floor, Add	*15.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*17.73*	
		For Elevated Installation >35' To 40' Above Floor, Add	*22.16*	
		For Elevated Installation >40' Above Floor, Add	*24.38*	
26 05 33 13-0843	EA	3-1/2" Intermediate Metal Conduit (IMC) Threaded Coupling	73.81	19.37
		For Work In Restricted Working Space, Add	*14.54*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.85*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.69*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.96*	
		For Elevated Installation >30' To 35' Above Floor, Add	*19.38*	
		For Elevated Installation >35' To 40' Above Floor, Add	*24.23*	
		For Elevated Installation >40' Above Floor, Add	*26.65*	
26 05 33 13-0844	EA	4" Intermediate Metal Conduit (IMC) Threaded Coupling	77.07	20.61
		For Work In Restricted Working Space, Add	*15.45*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.60*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.76*	
		For Elevated Installation >40' Above Floor, Add	*28.33*	

26 05 33 13-0845 Intermediate Metal Conduit (IMC) Reducer Bushings *(26 05 33 13-0745)*

26 05 33 13-0846	EA	1/2" To 3/4" Intermediate Metal Conduit (IMC) Reducing Bushing	7.02	2.07
		For Work In Restricted Working Space, Add	*1.55*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.52*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.03*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.29*	
		For Elevated Installation >25' To 30' Above Floor, Add	*1.80*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.06*	
		For Elevated Installation >35' To 40' Above Floor, Add	*2.58*	
		For Elevated Installation >40' Above Floor, Add	*2.83*	
26 05 33 13-0847	EA	3/4" To 1" Intermediate Metal Conduit (IMC) Reducing Bushing	8.09	2.07
		For Work In Restricted Working Space, Add	*1.55*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.52*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.03*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.29*	
		For Elevated Installation >25' To 30' Above Floor, Add	*1.80*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.06*	
		For Elevated Installation >35' To 40' Above Floor, Add	*2.58*	
		For Elevated Installation >40' Above Floor, Add	*2.83*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0848		**Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Conduit** *(26 05 33 13-0059)* Note: 40 mil polyvinyl chloride (PVC) coated, 2 mil urethane lined (Ocal Blue, Crouse-Hinds, Appleton or O-Z/Gedney). Used in hazardous locations. Exposed installation, branch and feeder conduit. Excludes supporting strap, hanger and fastening.		
26 05 33 13-0849		**Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Conduit** *(26 05 33 13-0848)* Note: Includes field bending conduit up to and including 1". See CSI section 26 05 33 13-2319 for field bending >1".		
26 05 33 13-0850	LF	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Conduit	12.62	2.89
		For >250 To 500, Deduct	*-0.45*	
		For >500 To 1,000, Deduct	*-0.77*	
		For >1,000, Deduct	*-1.08*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.72*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.44*	
		For Elevated Installation >20' To 25' Above Floor, Add	*1.80*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.52*	
		For Elevated Installation >30' To 35' Above Floor, Add	*2.88*	
		For Elevated Installation >35' To 40' Above Floor, Add	*3.61*	
		For Elevated Installation >40' Above Floor, Add	*3.97*	
		For Work In Restricted Working Space, Add	*2.16*	
26 05 33 13-0851	LF	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Conduit	14.50	3.30
		For >250 To 500, Deduct	*-0.52*	
		For >500 To 1,000, Deduct	*-0.88*	
		For >1,000, Deduct	*-1.24*	
		For Elevated Installation >10' To 15' Above Floor, Add	*0.82*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.65*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.06*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.88*	
		For Elevated Installation >30' To 35' Above Floor, Add	*3.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*4.12*	
		For Elevated Installation >40' Above Floor, Add	*4.53*	
		For Work In Restricted Working Space, Add	*2.47*	
26 05 33 13-0852	LF	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Conduit	18.42	4.12
		For >250 To 500, Deduct	*-0.66*	
		For >500 To 1,000, Deduct	*-1.12*	
		For >1,000, Deduct	*-1.58*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.03*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.06*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.58*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.61*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*5.16*	
		For Elevated Installation >40' Above Floor, Add	*5.67*	
		For Work In Restricted Working Space, Add	*3.09*	
26 05 33 13-0853	LF	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Conduit	22.64	4.94
		For >250 To 500, Deduct	*-0.82*	
		For >500 To 1,000, Deduct	*-1.39*	
		For >1,000, Deduct	*-1.96*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.47*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.09*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.33*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.94*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.18*	
		For Elevated Installation >40' Above Floor, Add	*6.80*	
		For Work In Restricted Working Space, Add	*3.71*	
26 05 33 13-0854	LF	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Conduit	27.96	6.19
		For >250 To 500, Deduct	*-1.01*	
		For >500 To 1,000, Deduct	*-1.71*	
		For >1,000, Deduct	*-2.41*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.87*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.41*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.73*	
		For Elevated Installation >40' Above Floor, Add	*8.50*	
		For Work In Restricted Working Space, Add	*4.64*	
26 05 33 13-0855	LF	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Conduit	34.84	7.42
		For >250 To 500, Deduct	*-1.28*	
		For >500 To 1,000, Deduct	*-2.15*	
		For >1,000, Deduct	*-3.02*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.86*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.71*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.64*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.49*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.42*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.28*	
		For Elevated Installation >40' Above Floor, Add	*10.20*	
		For Work In Restricted Working Space, Add	*5.57*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0856	LF	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Conduit	46.34	8.65
		For >250 To 500, Deduct	*-1.78*	
		For >500 To 1,000, Deduct	*-2.93*	
		For >1,000, Deduct	*-4.09*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.16*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.33*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.41*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.57*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.66*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.82*	
		For Elevated Installation >40' Above Floor, Add	*11.90*	
		For Work In Restricted Working Space, Add	*6.49*	
26 05 33 13-0857	LF	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Conduit	57.94	10.72
		For >250 To 500, Deduct	*-2.23*	
		For >500 To 1,000, Deduct	*-3.68*	
		For >1,000, Deduct	*-5.12*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.68*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.36*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.70*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.38*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.72*	
		For Elevated Installation >35' To 40' Above Floor, Add	*13.40*	
		For Elevated Installation >40' Above Floor, Add	*14.73*	
		For Work In Restricted Working Space, Add	*8.04*	
26 05 33 13-0858	LF	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Conduit	71.08	13.19
		For >250 To 500, Deduct	*-2.73*	
		For >500 To 1,000, Deduct	*-4.51*	
		For >1,000, Deduct	*-6.28*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.30*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.60*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.25*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.19*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.49*	
		For Elevated Installation >40' Above Floor, Add	*18.14*	
		For Work In Restricted Working Space, Add	*9.89*	
26 05 33 13-0859	LF	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Conduit	84.08	15.66
		For >250 To 500, Deduct	*-3.23*	
		For >500 To 1,000, Deduct	*-5.33*	
		For >1,000, Deduct	*-7.43*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.92*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.83*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.79*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.66*	
		For Elevated Installation >35' To 40' Above Floor, Add	*19.58*	
		For Elevated Installation >40' Above Floor, Add	*21.54*	
		For Work In Restricted Working Space, Add	*11.75*	
26 05 33 13-0860	LF	5" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Conduit	125.99	18.55
		For >250 To 500, Deduct	*-5.14*	
		For >500 To 1,000, Deduct	*-8.29*	
		For >1,000, Deduct	*-11.44*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.64*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.60*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.55*	
		For Elevated Installation >35' To 40' Above Floor, Add	*23.19*	
		For Elevated Installation >40' Above Floor, Add	*25.51*	
		For Work In Restricted Working Space, Add	*13.91*	
26 05 33 13-0861	LF	6" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Conduit	170.92	24.73
		For >250 To 500, Deduct	*-7.00*	
		For >500 To 1,000, Deduct	*-11.27*	
		For >1,000, Deduct	*-15.55*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.18*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.46*	
		For Elevated Installation >25' To 30' Above Floor, Add	*21.64*	
		For Elevated Installation >30' To 35' Above Floor, Add	*24.73*	
		For Elevated Installation >35' To 40' Above Floor, Add	*30.92*	
		For Elevated Installation >40' Above Floor, Add	*34.01*	
		For Work In Restricted Working Space, Add	*18.55*	

26 05 33 13-0862 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Couplings *(26 05 33 13-0848)*

26 05 33 13-0863	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Coupling	18.07	6.19
		For Elevated Installation >10' To 15' Above Floor, Add	*1.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.47*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.09*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.33*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.94*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.18*	
		For Elevated Installation >40' Above Floor, Add	*6.80*	
		For Work In Restricted Working Space, Add	*3.71*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0864	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Coupling	23.50	8.76
		For Elevated Installation >10' To 15' Above Floor, Add	*1.75*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.50*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.13*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.01*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.76*	
		For Elevated Installation >40' Above Floor, Add	*9.64*	
		For Work In Restricted Working Space, Add	*5.26*	
26 05 33 13-0865	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Coupling	30.43	11.33
		For Elevated Installation >10' To 15' Above Floor, Add	*2.27*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.53*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.67*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.93*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.07*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.34*	
		For Elevated Installation >40' Above Floor, Add	*12.47*	
		For Work In Restricted Working Space, Add	*6.80*	
26 05 33 13-0866	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Coupling	34.82	12.89
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.88*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
		For Work In Restricted Working Space, Add	*7.73*	
26 05 33 13-0867	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Coupling	41.68	15.46
		For Elevated Installation >10' To 15' Above Floor, Add	*3.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.46*	
		For Elevated Installation >40' Above Floor, Add	*17.00*	
		For Work In Restricted Working Space, Add	*9.27*	
26 05 33 13-0868	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Coupling	50.80	17.52
		For Elevated Installation >10' To 15' Above Floor, Add	*3.50*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.01*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.76*	
		For Elevated Installation >25' To 30' Above Floor, Add	*12.26*	
		For Elevated Installation >30' To 35' Above Floor, Add	*14.02*	
		For Elevated Installation >35' To 40' Above Floor, Add	*17.52*	
		For Elevated Installation >40' Above Floor, Add	*19.27*	
		For Work In Restricted Working Space, Add	*10.51*	
26 05 33 13-0869	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Coupling	78.17	17.52
		For Elevated Installation >10' To 15' Above Floor, Add	*3.92*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.83*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.79*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.66*	
		For Elevated Installation >35' To 40' Above Floor, Add	*19.58*	
		For Elevated Installation >40' Above Floor, Add	*21.54*	
		For Work In Restricted Working Space, Add	*11.75*	
26 05 33 13-0870	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Coupling	91.68	24.22
		For Elevated Installation >10' To 15' Above Floor, Add	*4.43*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.86*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.08*	
		For Elevated Installation >25' To 30' Above Floor, Add	*15.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*17.72*	
		For Elevated Installation >35' To 40' Above Floor, Add	*22.16*	
		For Elevated Installation >40' Above Floor, Add	*24.37*	
		For Work In Restricted Working Space, Add	*13.29*	
26 05 33 13-0871	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Coupling	109.20	24.22
		For Elevated Installation >10' To 15' Above Floor, Add	*4.84*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.69*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.95*	
		For Elevated Installation >30' To 35' Above Floor, Add	*19.37*	
		For Elevated Installation >35' To 40' Above Floor, Add	*24.22*	
		For Elevated Installation >40' Above Floor, Add	*26.64*	
		For Work In Restricted Working Space, Add	*14.53*	
26 05 33 13-0872	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Coupling	122.58	25.76
		For Elevated Installation >10' To 15' Above Floor, Add	*5.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.76*	
		For Elevated Installation >40' Above Floor, Add	*28.34*	
		For Work In Restricted Working Space, Add	*15.46*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0873	EA	5" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Coupling	293.37	30.91
		For Elevated Installation >10' To 15' Above Floor, Add	*6.18*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.46*	
		For Elevated Installation >25' To 30' Above Floor, Add	*21.64*	
		For Elevated Installation >30' To 35' Above Floor, Add	*24.73*	
		For Elevated Installation >35' To 40' Above Floor, Add	*30.92*	
		For Elevated Installation >40' Above Floor, Add	*34.01*	
		For Work In Restricted Working Space, Add	*18.55*	
26 05 33 13-0874	EA	6" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Coupling	330.78	36.07
		For Elevated Installation >10' To 15' Above Floor, Add	*7.21*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.43*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.04*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.25*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.86*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.07*	
		For Elevated Installation >40' Above Floor, Add	*39.68*	
		For Work In Restricted Working Space, Add	*21.64*	

26 05 33 13-0875 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Standard Radius Elbows *(26 05 33 13-0848)*

Note: 90, 45, or 30-degree.

26 05 33 13-0876	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Standard Radius Elbow	53.50	16.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Work In Restricted Working Space, Add	*10.05*	
26 05 33 13-0877	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Standard Radius Elbow	62.30	20.77
		For Elevated Installation >10' To 15' Above Floor, Add	*4.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.31*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.77*	
		For Elevated Installation >40' Above Floor, Add	*22.84*	
		For Work In Restricted Working Space, Add	*12.46*	
26 05 33 13-0878	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Standard Radius Elbow	74.73	25.45
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
		For Work In Restricted Working Space, Add	*15.27*	
26 05 33 13-0879	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Standard Radius Elbow	88.22	29.47
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
		For Work In Restricted Working Space, Add	*17.68*	
26 05 33 13-0880	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Standard Radius Elbow	102.96	33.49
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	
		For Work In Restricted Working Space, Add	*20.09*	
26 05 33 13-0881	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Standard Radius Elbow	123.89	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
26 05 33 13-0882	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Standard Radius Elbow	187.03	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0883	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Standard Radius Elbow	277.10	62.96
		For Elevated Installation >10' To 15' Above Floor, Add	*12.59*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.48*	
		For Elevated Installation >25' To 30' Above Floor, Add	*44.08*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.37*	
		For Elevated Installation >35' To 40' Above Floor, Add	*62.97*	
		For Elevated Installation >40' Above Floor, Add	*69.26*	
		For Work In Restricted Working Space, Add	*37.78*	
26 05 33 13-0884	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Standard Radius Elbow	340.37	71.00
		For Elevated Installation >10' To 15' Above Floor, Add	*14.20*	
		For Elevated Installation >15' To 20' Above Floor, Add	*28.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*35.50*	
		For Elevated Installation >25' To 30' Above Floor, Add	*49.70*	
		For Elevated Installation >30' To 35' Above Floor, Add	*56.80*	
		For Elevated Installation >35' To 40' Above Floor, Add	*71.01*	
		For Elevated Installation >40' Above Floor, Add	*78.11*	
		For Work In Restricted Working Space, Add	*42.60*	
26 05 33 13-0885	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Standard Radius Elbow	394.56	92.43
		For Elevated Installation >10' To 15' Above Floor, Add	*18.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*73.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.44*	
		For Elevated Installation >40' Above Floor, Add	*101.68*	
		For Work In Restricted Working Space, Add	*55.46*	
26 05 33 13-0886	EA	5" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Standard Radius Elbow	806.72	150.71
		For Elevated Installation >10' To 15' Above Floor, Add	*30.14*	
		For Elevated Installation >15' To 20' Above Floor, Add	*60.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*75.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*105.50*	
		For Elevated Installation >30' To 35' Above Floor, Add	*120.57*	
		For Elevated Installation >35' To 40' Above Floor, Add	*150.71*	
		For Elevated Installation >40' Above Floor, Add	*165.78*	
		For Work In Restricted Working Space, Add	*90.43*	
26 05 33 13-0887	EA	6" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Standard Radius Elbow	1,265.02	226.41
		For Elevated Installation >10' To 15' Above Floor, Add	*45.28*	
		For Elevated Installation >15' To 20' Above Floor, Add	*90.56*	
		For Elevated Installation >20' To 25' Above Floor, Add	*113.20*	
		For Elevated Installation >25' To 30' Above Floor, Add	*158.48*	
		For Elevated Installation >30' To 35' Above Floor, Add	*181.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*226.41*	
		For Elevated Installation >40' Above Floor, Add	*249.05*	
		For Work In Restricted Working Space, Add	*135.84*	

26 05 33 13-0888 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 12" Large Radius Elbows *(26 05 33 13-0848)*

26 05 33 13-0889	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 12" Large Radius Elbow	121.90	25.45
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
		For Work In Restricted Working Space, Add	*15.27*	
26 05 33 13-0890	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 12" Large Radius Elbow	137.46	29.47
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
		For Work In Restricted Working Space, Add	*17.68*	
26 05 33 13-0891	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 12" Large Radius Elbow	156.87	33.49
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	
		For Work In Restricted Working Space, Add	*20.09*	
26 05 33 13-0892	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 12" Large Radius Elbow	186.10	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0893	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 12" Large Radius Elbow	257.44	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	

26 05 33 13-0894 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 15" Large Radius Elbows *(26 05 33 13-0848)*

26 05 33 13-0895	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 15" Large Radius Elbow	134.65	25.45
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
		For Work In Restricted Working Space, Add	*15.27*	
26 05 33 13-0896	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 15" Large Radius Elbow	158.53	29.47
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
		For Work In Restricted Working Space, Add	*17.68*	
26 05 33 13-0897	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 15" Large Radius Elbow	171.98	33.49
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	
		For Work In Restricted Working Space, Add	*20.09*	
26 05 33 13-0898	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 15" Large Radius Elbow	219.05	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
26 05 33 13-0899	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 15" Large Radius Elbow	289.22	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	
26 05 33 13-0900	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 15" Large Radius Elbow	371.33	62.96
		For Elevated Installation >10' To 15' Above Floor, Add	*12.59*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.48*	
		For Elevated Installation >25' To 30' Above Floor, Add	*44.08*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.37*	
		For Elevated Installation >35' To 40' Above Floor, Add	*62.97*	
		For Elevated Installation >40' Above Floor, Add	*69.26*	
		For Work In Restricted Working Space, Add	*37.78*	

26 05 33 13-0901 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 18" Large Radius Elbows *(26 05 33 13-0848)*

26 05 33 13-0902	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 18" Large Radius Elbow	149.90	25.45
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
		For Work In Restricted Working Space, Add	*15.27*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0903	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 18" Large Radius Elbow	169.51	29.47
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
		For Work In Restricted Working Space, Add	*17.68*	
26 05 33 13-0904	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 18" Large Radius Elbow	191.37	33.49
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	
		For Work In Restricted Working Space, Add	*20.09*	
26 05 33 13-0905	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 18" Large Radius Elbow	229.98	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
26 05 33 13-0906	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 18" Large Radius Elbow	325.73	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	
26 05 33 13-0907	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 18" Large Radius Elbow	414.20	62.96
		For Elevated Installation >10' To 15' Above Floor, Add	*12.59*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.48*	
		For Elevated Installation >25' To 30' Above Floor, Add	*44.08*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.37*	
		For Elevated Installation >35' To 40' Above Floor, Add	*62.97*	
		For Elevated Installation >40' Above Floor, Add	*69.26*	
		For Work In Restricted Working Space, Add	*37.78*	
26 05 33 13-0908	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 18" Large Radius Elbow	519.89	71.00
		For Elevated Installation >10' To 15' Above Floor, Add	*14.20*	
		For Elevated Installation >15' To 20' Above Floor, Add	*28.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*35.50*	
		For Elevated Installation >25' To 30' Above Floor, Add	*49.70*	
		For Elevated Installation >30' To 35' Above Floor, Add	*56.80*	
		For Elevated Installation >35' To 40' Above Floor, Add	*71.01*	
		For Elevated Installation >40' Above Floor, Add	*78.11*	
		For Work In Restricted Working Space, Add	*42.60*	
26 05 33 13-0909	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 18" Large Radius Elbow	590.14	92.43
		For Elevated Installation >10' To 15' Above Floor, Add	*18.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*73.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.44*	
		For Elevated Installation >40' Above Floor, Add	*101.68*	
		For Work In Restricted Working Space, Add	*55.46*	

26 05 33 13-0910 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 24" Large Radius Elbows *(26 05 33 13-0848)*

26 05 33 13-0911	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 24" Large Radius Elbow	176.25	25.45
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
		For Work In Restricted Working Space, Add	*15.27*	
26 05 33 13-0912	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 24" Large Radius Elbow	195.28	29.47
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
		For Work In Restricted Working Space, Add	*17.68*	

copyright 2026 The Gordian Group, Inc.

	MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0913		EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 24" Large Radius Elbow	220.62	33.49
			For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
			For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
			For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
			For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
			For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
			For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
			For Elevated Installation >40' Above Floor, Add	*36.84*	
			For Work In Restricted Working Space, Add	*20.09*	
26 05 33 13-0914		EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 24" Large Radius Elbow	272.11	36.84
			For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
			For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
			For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
			For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
			For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
			For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
			For Elevated Installation >40' Above Floor, Add	*40.52*	
			For Work In Restricted Working Space, Add	*22.10*	
26 05 33 13-0915		EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 24" Large Radius Elbow	391.07	46.22
			For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
			For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
			For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
			For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
			For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
			For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
			For Elevated Installation >40' Above Floor, Add	*50.84*	
			For Work In Restricted Working Space, Add	*27.73*	
26 05 33 13-0916		EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 24" Large Radius Elbow	486.83	62.96
			For Elevated Installation >10' To 15' Above Floor, Add	*12.59*	
			For Elevated Installation >15' To 20' Above Floor, Add	*25.19*	
			For Elevated Installation >20' To 25' Above Floor, Add	*31.48*	
			For Elevated Installation >25' To 30' Above Floor, Add	*44.08*	
			For Elevated Installation >30' To 35' Above Floor, Add	*50.37*	
			For Elevated Installation >35' To 40' Above Floor, Add	*62.97*	
			For Elevated Installation >40' Above Floor, Add	*69.26*	
			For Work In Restricted Working Space, Add	*37.78*	
26 05 33 13-0917		EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 24" Large Radius Elbow	564.23	71.00
			For Elevated Installation >10' To 15' Above Floor, Add	*14.20*	
			For Elevated Installation >15' To 20' Above Floor, Add	*28.40*	
			For Elevated Installation >20' To 25' Above Floor, Add	*35.50*	
			For Elevated Installation >25' To 30' Above Floor, Add	*49.70*	
			For Elevated Installation >30' To 35' Above Floor, Add	*56.80*	
			For Elevated Installation >35' To 40' Above Floor, Add	*71.01*	
			For Elevated Installation >40' Above Floor, Add	*78.11*	
			For Work In Restricted Working Space, Add	*42.60*	
26 05 33 13-0918		EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 24" Large Radius Elbow	671.55	92.43
			For Elevated Installation >10' To 15' Above Floor, Add	*18.49*	
			For Elevated Installation >15' To 20' Above Floor, Add	*36.98*	
			For Elevated Installation >20' To 25' Above Floor, Add	*46.22*	
			For Elevated Installation >25' To 30' Above Floor, Add	*64.71*	
			For Elevated Installation >30' To 35' Above Floor, Add	*73.95*	
			For Elevated Installation >35' To 40' Above Floor, Add	*92.44*	
			For Elevated Installation >40' Above Floor, Add	*101.68*	
			For Work In Restricted Working Space, Add	*55.46*	

26 05 33 13-0919 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 30" Large Radius Elbows *(26 05 33 13-0848)*

26 05 33 13-0920		EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 30" Large Radius Elbow	196.74	25.45
			For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
			For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
			For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
			For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
			For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
			For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
			For Elevated Installation >40' Above Floor, Add	*28.00*	
			For Work In Restricted Working Space, Add	*15.27*	
26 05 33 13-0921		EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 30" Large Radius Elbow	219.26	29.47
			For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
			For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
			For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
			For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
			For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
			For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
			For Elevated Installation >40' Above Floor, Add	*32.42*	
			For Work In Restricted Working Space, Add	*17.68*	
26 05 33 13-0922		EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 30" Large Radius Elbow	249.42	33.49
			For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
			For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
			For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
			For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
			For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
			For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
			For Elevated Installation >40' Above Floor, Add	*36.84*	
			For Work In Restricted Working Space, Add	*20.09*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0923	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 30" Large Radius Elbow	308.78	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
26 05 33 13-0924	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 30" Large Radius Elbow	426.73	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	
26 05 33 13-0925	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 30" Large Radius Elbow	544.92	62.96
		For Elevated Installation >10' To 15' Above Floor, Add	*12.59*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.48*	
		For Elevated Installation >25' To 30' Above Floor, Add	*44.08*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.37*	
		For Elevated Installation >35' To 40' Above Floor, Add	*62.97*	
		For Elevated Installation >40' Above Floor, Add	*69.26*	
		For Work In Restricted Working Space, Add	*37.78*	
26 05 33 13-0926	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 30" Large Radius Elbow	672.05	71.00
		For Elevated Installation >10' To 15' Above Floor, Add	*14.20*	
		For Elevated Installation >15' To 20' Above Floor, Add	*28.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*35.50*	
		For Elevated Installation >25' To 30' Above Floor, Add	*49.70*	
		For Elevated Installation >30' To 35' Above Floor, Add	*56.80*	
		For Elevated Installation >35' To 40' Above Floor, Add	*71.01*	
		For Elevated Installation >40' Above Floor, Add	*78.11*	
		For Work In Restricted Working Space, Add	*42.60*	
26 05 33 13-0927	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 30" Large Radius Elbow	746.28	92.43
		For Elevated Installation >10' To 15' Above Floor, Add	*18.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*73.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.44*	
		For Elevated Installation >40' Above Floor, Add	*101.68*	
		For Work In Restricted Working Space, Add	*55.46*	
26 05 33 13-0928	EA	5" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 30" Large Radius Elbow	1,242.99	150.71
		For Elevated Installation >10' To 15' Above Floor, Add	*30.14*	
		For Elevated Installation >15' To 20' Above Floor, Add	*60.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*75.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*105.50*	
		For Elevated Installation >30' To 35' Above Floor, Add	*120.57*	
		For Elevated Installation >35' To 40' Above Floor, Add	*150.71*	
		For Elevated Installation >40' Above Floor, Add	*165.78*	
		For Work In Restricted Working Space, Add	*90.43*	

26 05 33 13-0929 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 36" Large Radius Elbows *(26 05 33 13-0848)*

26 05 33 13-0930	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 36" Large Radius Elbow	223.55	25.45
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
		For Work In Restricted Working Space, Add	*15.27*	
26 05 33 13-0931	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 36" Large Radius Elbow	248.24	29.47
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
		For Work In Restricted Working Space, Add	*17.68*	
26 05 33 13-0932	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 36" Large Radius Elbow	280.98	33.49
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	
		For Work In Restricted Working Space, Add	*20.09*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0933	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 36" Large Radius Elbow	349.45	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
26 05 33 13-0934	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 36" Large Radius Elbow	486.14	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	
26 05 33 13-0935	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 36" Large Radius Elbow	618.93	62.96
		For Elevated Installation >10' To 15' Above Floor, Add	*12.59*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.48*	
		For Elevated Installation >25' To 30' Above Floor, Add	*44.08*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.37*	
		For Elevated Installation >35' To 40' Above Floor, Add	*62.97*	
		For Elevated Installation >40' Above Floor, Add	*69.26*	
		For Work In Restricted Working Space, Add	*37.78*	
26 05 33 13-0936	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 36" Large Radius Elbow	726.08	71.00
		For Elevated Installation >10' To 15' Above Floor, Add	*14.20*	
		For Elevated Installation >15' To 20' Above Floor, Add	*28.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*35.50*	
		For Elevated Installation >25' To 30' Above Floor, Add	*49.70*	
		For Elevated Installation >30' To 35' Above Floor, Add	*56.80*	
		For Elevated Installation >35' To 40' Above Floor, Add	*71.01*	
		For Elevated Installation >40' Above Floor, Add	*78.11*	
		For Work In Restricted Working Space, Add	*42.60*	
26 05 33 13-0937	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 36" Large Radius Elbow	842.76	92.43
		For Elevated Installation >10' To 15' Above Floor, Add	*18.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*73.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.44*	
		For Elevated Installation >40' Above Floor, Add	*101.68*	
		For Work In Restricted Working Space, Add	*55.46*	
26 05 33 13-0938	EA	5" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 36" Large Radius Elbow	1,310.60	150.71
		For Elevated Installation >10' To 15' Above Floor, Add	*30.14*	
		For Elevated Installation >15' To 20' Above Floor, Add	*60.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*75.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*105.50*	
		For Elevated Installation >30' To 35' Above Floor, Add	*120.57*	
		For Elevated Installation >35' To 40' Above Floor, Add	*150.71*	
		For Elevated Installation >40' Above Floor, Add	*165.78*	
		For Work In Restricted Working Space, Add	*90.43*	
26 05 33 13-0939	EA	6" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 36" Large Radius Elbow	1,799.27	226.41
		For Elevated Installation >10' To 15' Above Floor, Add	*45.28*	
		For Elevated Installation >15' To 20' Above Floor, Add	*90.56*	
		For Elevated Installation >20' To 25' Above Floor, Add	*113.20*	
		For Elevated Installation >25' To 30' Above Floor, Add	*158.48*	
		For Elevated Installation >30' To 35' Above Floor, Add	*181.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*226.41*	
		For Elevated Installation >40' Above Floor, Add	*249.05*	
		For Work In Restricted Working Space, Add	*135.84*	

26 05 33 13-0940 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 42" Large Radius Elbows *(26 05 33 13-0848)*

26 05 33 13-0941	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 42" Large Radius Elbow	260.87	25.45
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
		For Work In Restricted Working Space, Add	*15.27*	
26 05 33 13-0942	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 42" Large Radius Elbow	274.07	29.47
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
		For Work In Restricted Working Space, Add	*17.68*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0943	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 42" Large Radius Elbow	323.22	33.49
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	
		For Work In Restricted Working Space, Add	*20.09*	
26 05 33 13-0944	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 42" Large Radius Elbow	406.06	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
26 05 33 13-0945	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 42" Large Radius Elbow	566.26	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.98*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	
26 05 33 13-0946	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 42" Large Radius Elbow	718.71	62.96
		For Elevated Installation >10' To 15' Above Floor, Add	*12.59*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.48*	
		For Elevated Installation >25' To 30' Above Floor, Add	*44.08*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.37*	
		For Elevated Installation >35' To 40' Above Floor, Add	*62.97*	
		For Elevated Installation >40' Above Floor, Add	*69.26*	
		For Work In Restricted Working Space, Add	*37.78*	
26 05 33 13-0947	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 42" Large Radius Elbow	876.28	71.00
		For Elevated Installation >10' To 15' Above Floor, Add	*14.20*	
		For Elevated Installation >15' To 20' Above Floor, Add	*28.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*35.50*	
		For Elevated Installation >25' To 30' Above Floor, Add	*49.70*	
		For Elevated Installation >30' To 35' Above Floor, Add	*56.80*	
		For Elevated Installation >35' To 40' Above Floor, Add	*71.01*	
		For Elevated Installation >40' Above Floor, Add	*78.11*	
		For Work In Restricted Working Space, Add	*42.60*	
26 05 33 13-0948	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 42" Large Radius Elbow	1,030.44	92.43
		For Elevated Installation >10' To 15' Above Floor, Add	*18.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*73.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.44*	
		For Elevated Installation >40' Above Floor, Add	*101.68*	
		For Work In Restricted Working Space, Add	*55.46*	
26 05 33 13-0949	EA	5" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 42" Large Radius Elbow	1,531.14	150.71
		For Elevated Installation >10' To 15' Above Floor, Add	*30.14*	
		For Elevated Installation >15' To 20' Above Floor, Add	*60.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*75.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*105.50*	
		For Elevated Installation >30' To 35' Above Floor, Add	*120.57*	
		For Elevated Installation >35' To 40' Above Floor, Add	*150.71*	
		For Elevated Installation >40' Above Floor, Add	*165.78*	
		For Work In Restricted Working Space, Add	*90.43*	
26 05 33 13-0950	EA	6" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 42" Large Radius Elbow	1,900.51	226.41
		For Elevated Installation >10' To 15' Above Floor, Add	*45.28*	
		For Elevated Installation >15' To 20' Above Floor, Add	*90.56*	
		For Elevated Installation >20' To 25' Above Floor, Add	*113.20*	
		For Elevated Installation >25' To 30' Above Floor, Add	*158.48*	
		For Elevated Installation >30' To 35' Above Floor, Add	*181.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*226.41*	
		For Elevated Installation >40' Above Floor, Add	*249.05*	
		For Work In Restricted Working Space, Add	*135.84*	

26 05 33 13-0951 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 48" Large Radius Elbows *(26 05 33 13-0848)*

26 05 33 13-0952	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 48" Large Radius Elbow	269.86	25.45
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
		For Work In Restricted Working Space, Add	*15.27*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0953	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 48" Large Radius Elbow	317.77	29.47
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
		For Work In Restricted Working Space, Add	*17.68*	
26 05 33 13-0954	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 48" Large Radius Elbow	359.75	33.49
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	
		For Work In Restricted Working Space, Add	*20.09*	
26 05 33 13-0955	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 48" Large Radius Elbow	423.09	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
26 05 33 13-0956	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 48" Large Radius Elbow	586.27	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.98*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	
26 05 33 13-0957	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 48" Large Radius Elbow	749.40	62.96
		For Elevated Installation >10' To 15' Above Floor, Add	*12.59*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.48*	
		For Elevated Installation >25' To 30' Above Floor, Add	*44.08*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.37*	
		For Elevated Installation >35' To 40' Above Floor, Add	*62.97*	
		For Elevated Installation >40' Above Floor, Add	*69.26*	
		For Work In Restricted Working Space, Add	*37.78*	
26 05 33 13-0958	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 48" Large Radius Elbow	958.08	71.00
		For Elevated Installation >10' To 15' Above Floor, Add	*14.20*	
		For Elevated Installation >15' To 20' Above Floor, Add	*28.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*35.50*	
		For Elevated Installation >25' To 30' Above Floor, Add	*49.70*	
		For Elevated Installation >30' To 35' Above Floor, Add	*56.80*	
		For Elevated Installation >35' To 40' Above Floor, Add	*71.01*	
		For Elevated Installation >40' Above Floor, Add	*78.11*	
		For Work In Restricted Working Space, Add	*42.60*	
26 05 33 13-0959	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 48" Large Radius Elbow	1,073.00	92.43
		For Elevated Installation >10' To 15' Above Floor, Add	*18.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*73.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.44*	
		For Elevated Installation >40' Above Floor, Add	*101.68*	
		For Work In Restricted Working Space, Add	*55.46*	
26 05 33 13-0960	EA	5" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 48" Large Radius Elbow	1,590.39	150.71
		For Elevated Installation >10' To 15' Above Floor, Add	*30.14*	
		For Elevated Installation >15' To 20' Above Floor, Add	*60.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*75.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*105.50*	
		For Elevated Installation >30' To 35' Above Floor, Add	*120.57*	
		For Elevated Installation >35' To 40' Above Floor, Add	*150.71*	
		For Elevated Installation >40' Above Floor, Add	*165.78*	
		For Work In Restricted Working Space, Add	*90.43*	
26 05 33 13-0961	EA	6" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 48" Large Radius Elbow	1,951.94	226.41
		For Elevated Installation >10' To 15' Above Floor, Add	*45.28*	
		For Elevated Installation >15' To 20' Above Floor, Add	*90.56*	
		For Elevated Installation >20' To 25' Above Floor, Add	*113.20*	
		For Elevated Installation >25' To 30' Above Floor, Add	*158.48*	
		For Elevated Installation >30' To 35' Above Floor, Add	*181.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*226.41*	
		For Elevated Installation >40' Above Floor, Add	*249.05*	
		For Work In Restricted Working Space, Add	*135.84*	

26 05 33 13-0962 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 45 Degree Sealtight Fittings *(26 05 33 13-0848)*

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0963	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 45 Degree Sealtight Fitting	100.78	16.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Work In Restricted Working Space, Add	*10.05*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.05*	
26 05 33 13-0964	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 45 Degree Sealtight Fitting	123.56	22.10
		For Elevated Installation >10' To 15' Above Floor, Add	*4.42*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.84*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.05*	
		For Elevated Installation >25' To 30' Above Floor, Add	*15.47*	
		For Elevated Installation >30' To 35' Above Floor, Add	*17.68*	
		For Elevated Installation >35' To 40' Above Floor, Add	*22.11*	
		For Elevated Installation >40' Above Floor, Add	*24.32*	
		For Work In Restricted Working Space, Add	*13.26*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.26*	
26 05 33 13-0965	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 45 Degree Sealtight Fitting	164.23	25.45
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
		For Work In Restricted Working Space, Add	*15.27*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.27*	
26 05 33 13-0966	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 45 Degree Sealtight Fitting	268.18	29.47
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
		For Work In Restricted Working Space, Add	*17.68*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*17.68*	
26 05 33 13-0967	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 45 Degree Sealtight Fitting	296.23	33.49
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	
		For Work In Restricted Working Space, Add	*20.09*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.09*	
26 05 33 13-0968	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 45 Degree Sealtight Fitting	373.62	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*22.10*	
26 05 33 13-0969	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 45 Degree Sealtight Fitting	1,011.21	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.73*	
26 05 33 13-0970	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 45 Degree Sealtight Fitting	1,207.91	62.96
		For Elevated Installation >10' To 15' Above Floor, Add	*12.59*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.49*	
		For Elevated Installation >25' To 30' Above Floor, Add	*44.08*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.38*	
		For Elevated Installation >35' To 40' Above Floor, Add	*62.97*	
		For Elevated Installation >40' Above Floor, Add	*69.27*	
		For Work In Restricted Working Space, Add	*37.78*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*37.78*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0971	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 45 Degree Sealtight Fitting	1,606.04	92.43
		For Elevated Installation >10' To 15' Above Floor, Add	*18.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.97*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.70*	
		For Elevated Installation >30' To 35' Above Floor, Add	*73.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.44*	
		For Elevated Installation >40' Above Floor, Add	*101.68*	
		For Work In Restricted Working Space, Add	*55.46*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*55.46*	

26 05 33 13-0972 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 90 Degree Sealtight Fittings *(26 05 33 13-0848)*

26 05 33 13-0973	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 90 Degree Sealtight Fitting	96.69	16.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Work In Restricted Working Space, Add	*10.05*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.05*	
26 05 33 13-0974	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 90 Degree Sealtight Fitting	118.94	22.10
		For Elevated Installation >10' To 15' Above Floor, Add	*4.42*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.84*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.05*	
		For Elevated Installation >25' To 30' Above Floor, Add	*15.47*	
		For Elevated Installation >30' To 35' Above Floor, Add	*17.68*	
		For Elevated Installation >35' To 40' Above Floor, Add	*22.11*	
		For Elevated Installation >40' Above Floor, Add	*24.32*	
		For Work In Restricted Working Space, Add	*13.26*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.26*	
26 05 33 13-0975	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 90 Degree Sealtight Fitting	164.23	25.45
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
		For Work In Restricted Working Space, Add	*15.27*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.27*	
26 05 33 13-0976	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 90 Degree Sealtight Fitting	265.80	29.47
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
		For Work In Restricted Working Space, Add	*17.68*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*17.68*	
26 05 33 13-0977	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 90 Degree Sealtight Fitting	286.64	33.49
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	
		For Work In Restricted Working Space, Add	*20.09*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.09*	
26 05 33 13-0978	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 90 Degree Sealtight Fitting	373.73	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*22.10*	
26 05 33 13-0979	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 90 Degree Sealtight Fitting	970.29	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.73*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0980	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 90 Degree Sealtight Fitting	1,178.06	62.96
		For Elevated Installation >10' To 15' Above Floor, Add	*12.59*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.49*	
		For Elevated Installation >25' To 30' Above Floor, Add	*44.08*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.38*	
		For Elevated Installation >35' To 40' Above Floor, Add	*62.97*	
		For Elevated Installation >40' Above Floor, Add	*69.27*	
		For Work In Restricted Working Space, Add	*37.78*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*37.78*	
26 05 33 13-0981	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 90 Degree Sealtight Fitting	1,605.97	92.43
		For Elevated Installation >10' To 15' Above Floor, Add	*18.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.97*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.70*	
		For Elevated Installation >30' To 35' Above Floor, Add	*73.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.44*	
		For Elevated Installation >40' Above Floor, Add	*101.68*	
		For Work In Restricted Working Space, Add	*55.46*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*55.46*	

26 05 33 13-0982 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Straight Sealtight Fittings *(26 05 33 13-0848)*

26 05 33 13-0983	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Straight Sealtight Fitting	87.63	16.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Work In Restricted Working Space, Add	*10.05*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.05*	
26 05 33 13-0984	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Straight Sealtight Fitting	105.19	22.10
		For Elevated Installation >10' To 15' Above Floor, Add	*4.42*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.84*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.05*	
		For Elevated Installation >25' To 30' Above Floor, Add	*15.47*	
		For Elevated Installation >30' To 35' Above Floor, Add	*17.68*	
		For Elevated Installation >35' To 40' Above Floor, Add	*22.11*	
		For Elevated Installation >40' Above Floor, Add	*24.32*	
		For Work In Restricted Working Space, Add	*13.26*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.26*	
26 05 33 13-0985	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Straight Sealtight Fitting	124.05	25.45
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
		For Work In Restricted Working Space, Add	*15.27*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.27*	
26 05 33 13-0986	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Straight Sealtight Fitting	175.38	29.47
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
		For Work In Restricted Working Space, Add	*17.68*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*17.68*	
26 05 33 13-0987	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Straight Sealtight Fitting	204.75	33.49
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	
		For Work In Restricted Working Space, Add	*20.09*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.09*	
26 05 33 13-0988	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Straight Sealtight Fitting	314.55	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*22.10*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0989	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Straight Sealtight Fitting	856.32	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.73*	
26 05 33 13-0990	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Straight Sealtight Fitting	965.19	62.96
		For Elevated Installation >10' To 15' Above Floor, Add	*12.59*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.49*	
		For Elevated Installation >25' To 30' Above Floor, Add	*44.08*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.38*	
		For Elevated Installation >35' To 40' Above Floor, Add	*62.97*	
		For Elevated Installation >40' Above Floor, Add	*69.27*	
		For Work In Restricted Working Space, Add	*37.78*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*37.78*	
26 05 33 13-0991	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Straight Sealtight Fitting	1,234.03	92.43
		For Elevated Installation >10' To 15' Above Floor, Add	*18.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.97*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.70*	
		For Elevated Installation >30' To 35' Above Floor, Add	*73.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.44*	
		For Elevated Installation >40' Above Floor, Add	*101.68*	
		For Work In Restricted Working Space, Add	*55.46*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*55.46*	

26 05 33 13-0992 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 45 Degree Grounded Sealtight Fittings *(26 05 33 13-0848)*

26 05 33 13-0993	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 45 Degree Grounded Sealtight Fitting	148.22	16.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Work In Restricted Working Space, Add	*10.05*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.05*	
26 05 33 13-0994	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 45 Degree Grounded Sealtight Fitting	223.02	22.10
		For Elevated Installation >10' To 15' Above Floor, Add	*4.42*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.84*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.05*	
		For Elevated Installation >25' To 30' Above Floor, Add	*15.47*	
		For Elevated Installation >30' To 35' Above Floor, Add	*17.68*	
		For Elevated Installation >35' To 40' Above Floor, Add	*22.11*	
		For Elevated Installation >40' Above Floor, Add	*24.32*	
		For Work In Restricted Working Space, Add	*13.26*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.26*	
26 05 33 13-0995	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 45 Degree Grounded Sealtight Fitting	280.09	25.45
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
		For Work In Restricted Working Space, Add	*15.27*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.27*	
26 05 33 13-0996	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 45 Degree Grounded Sealtight Fitting	323.32	29.47
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
		For Work In Restricted Working Space, Add	*17.68*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*17.68*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-0997	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 45 Degree Grounded Sealtight Fitting	367.20	33.49
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	
		For Work In Restricted Working Space, Add	*20.09*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.09*	
26 05 33 13-0998	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 45 Degree Grounded Sealtight Fitting	482.36	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*22.10*	
26 05 33 13-0999	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 45 Degree Grounded Sealtight Fitting	1,509.37	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.73*	
26 05 33 13-1000	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 45 Degree Grounded Sealtight Fitting	1,763.49	62.96
		For Elevated Installation >10' To 15' Above Floor, Add	*12.59*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.49*	
		For Elevated Installation >25' To 30' Above Floor, Add	*44.08*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.38*	
		For Elevated Installation >35' To 40' Above Floor, Add	*62.97*	
		For Elevated Installation >40' Above Floor, Add	*69.27*	
		For Work In Restricted Working Space, Add	*37.78*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*37.78*	
26 05 33 13-1001	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 45 Degree Grounded Sealtight Fitting	2,170.07	92.43
		For Elevated Installation >10' To 15' Above Floor, Add	*18.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.97*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.70*	
		For Elevated Installation >30' To 35' Above Floor, Add	*73.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.44*	
		For Elevated Installation >40' Above Floor, Add	*101.68*	
		For Work In Restricted Working Space, Add	*55.46*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*55.46*	

26 05 33 13-1002 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 90 Degree Grounded Sealtight Fittings *(26 05 33 13-0848)*

26 05 33 13-1003	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 90 Degree Grounded Sealtight Fitting	164.30	16.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Work In Restricted Working Space, Add	*10.05*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.05*	
26 05 33 13-1004	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 90 Degree Grounded Sealtight Fitting	238.20	22.10
		For Elevated Installation >10' To 15' Above Floor, Add	*4.42*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.84*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.05*	
		For Elevated Installation >25' To 30' Above Floor, Add	*15.47*	
		For Elevated Installation >30' To 35' Above Floor, Add	*17.68*	
		For Elevated Installation >35' To 40' Above Floor, Add	*22.11*	
		For Elevated Installation >40' Above Floor, Add	*24.32*	
		For Work In Restricted Working Space, Add	*13.26*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.26*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1005	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 90 Degree Grounded Sealtight Fitting	282.98	25.45
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
		For Work In Restricted Working Space, Add	*15.27*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.27*	
26 05 33 13-1006	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 90 Degree Grounded Sealtight Fitting	328.08	29.47
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
		For Work In Restricted Working Space, Add	*17.68*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*17.68*	
26 05 33 13-1007	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 90 Degree Grounded Sealtight Fitting	380.25	33.49
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	
		For Work In Restricted Working Space, Add	*20.09*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.09*	
26 05 33 13-1008	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 90 Degree Grounded Sealtight Fitting	597.12	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*22.10*	
26 05 33 13-1009	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 90 Degree Grounded Sealtight Fitting	1,682.52	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.73*	
26 05 33 13-1010	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 90 Degree Grounded Sealtight Fitting	2,367.99	62.96
		For Elevated Installation >10' To 15' Above Floor, Add	*12.59*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.49*	
		For Elevated Installation >25' To 30' Above Floor, Add	*44.08*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.38*	
		For Elevated Installation >35' To 40' Above Floor, Add	*62.97*	
		For Elevated Installation >40' Above Floor, Add	*69.27*	
		For Work In Restricted Working Space, Add	*37.78*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*37.78*	
26 05 33 13-1011	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 90 Degree Grounded Sealtight Fitting	2,476.09	92.43
		For Elevated Installation >10' To 15' Above Floor, Add	*18.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.97*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.70*	
		For Elevated Installation >30' To 35' Above Floor, Add	*73.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.44*	
		For Elevated Installation >40' Above Floor, Add	*101.68*	
		For Work In Restricted Working Space, Add	*55.46*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*55.46*	

26 05 33 13-1012 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Straight Grounded Sealtight Fittings *(26 05 33 13-0848)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1013	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Straight Grounded Sealtight Fitting	130.50	16.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Work In Restricted Working Space, Add	*10.05*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.05*	
26 05 33 13-1014	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Straight Grounded Sealtight Fitting	164.79	22.10
		For Elevated Installation >10' To 15' Above Floor, Add	*4.42*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.84*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.05*	
		For Elevated Installation >25' To 30' Above Floor, Add	*15.47*	
		For Elevated Installation >30' To 35' Above Floor, Add	*17.68*	
		For Elevated Installation >35' To 40' Above Floor, Add	*22.11*	
		For Elevated Installation >40' Above Floor, Add	*24.32*	
		For Work In Restricted Working Space, Add	*13.26*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.26*	
26 05 33 13-1015	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Straight Grounded Sealtight Fitting	197.30	25.45
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
		For Work In Restricted Working Space, Add	*15.27*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.27*	
26 05 33 13-1016	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Straight Grounded Sealtight Fitting	218.78	29.47
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
		For Work In Restricted Working Space, Add	*17.68*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*17.68*	
26 05 33 13-1017	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Straight Grounded Sealtight Fitting	293.83	33.49
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	
		For Work In Restricted Working Space, Add	*20.09*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.09*	
26 05 33 13-1018	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Straight Grounded Sealtight Fitting	413.96	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*22.10*	
26 05 33 13-1019	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Straight Grounded Sealtight Fitting	1,365.96	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.73*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1020	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Straight Grounded Sealtight Fitting	1,539.25	62.96
		For Elevated Installation >10' To 15' Above Floor, Add	*12.59*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.49*	
		For Elevated Installation >25' To 30' Above Floor, Add	*44.08*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.38*	
		For Elevated Installation >35' To 40' Above Floor, Add	*62.97*	
		For Elevated Installation >40' Above Floor, Add	*69.27*	
		For Work In Restricted Working Space, Add	*37.78*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*37.78*	
26 05 33 13-1021	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Straight Grounded Sealtight Fitting	1,831.50	92.43
		For Elevated Installation >10' To 15' Above Floor, Add	*18.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.97*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.70*	
		For Elevated Installation >30' To 35' Above Floor, Add	*73.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.44*	
		For Elevated Installation >40' Above Floor, Add	*101.68*	
		For Work In Restricted Working Space, Add	*55.46*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*55.46*	

26 05 33 13-1022 Type C, LB, LR, LL, Two Hub, Polyvinyl Chloride (PVC) Coated, Urethane Lined, Iron Conduit Bodies With Cover *(26 05 33 13-0848)*

Note: Suitable for use in hazardous locations. Class I, Div 2.

26 05 33 13-1023	EA	1/2" Type C, LB, LR, LL, Two Hub, Polyvinyl Chloride (PVC) Coated, Urethane Lined, Iron Conduit Bodies With Cover	120.35	32.15
		For Elevated Installation >10' To 15' Above Floor, Add	*6.43*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.86*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.08*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.72*	
		For Elevated Installation >35' To 40' Above Floor, Add	*32.16*	
		For Elevated Installation >40' Above Floor, Add	*35.37*	
		For Work In Restricted Working Space, Add	*19.29*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*19.29*	
26 05 33 13-1024	EA	3/4" Type C, LB, LR, LL, Two Hub, Polyvinyl Chloride (PVC) Coated, Urethane Lined, Iron Conduit Bodies With Cover	135.82	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*22.10*	
26 05 33 13-1025	EA	1" Type C, LB, LR, LL, Two Hub, Polyvinyl Chloride (PVC) Coated, Urethane Lined, Iron Conduit Bodies With Cover	167.54	42.20
		For Elevated Installation >10' To 15' Above Floor, Add	*8.44*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.88*	
		For Elevated Installation >20' To 25' Above Floor, Add	*21.10*	
		For Elevated Installation >25' To 30' Above Floor, Add	*29.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*33.76*	
		For Elevated Installation >35' To 40' Above Floor, Add	*42.20*	
		For Elevated Installation >40' Above Floor, Add	*46.42*	
		For Work In Restricted Working Space, Add	*25.32*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*25.32*	
26 05 33 13-1026	EA	1-1/4" Type C, LB, LR, LL, Two Hub, Polyvinyl Chloride (PVC) Coated, Urethane Lined, Iron Conduit Bodies With Cover	218.48	48.89
		For Elevated Installation >10' To 15' Above Floor, Add	*9.78*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.56*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.45*	
		For Elevated Installation >25' To 30' Above Floor, Add	*34.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*39.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*48.90*	
		For Elevated Installation >40' Above Floor, Add	*53.78*	
		For Work In Restricted Working Space, Add	*29.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*29.34*	
26 05 33 13-1027	EA	1-1/2" Type C, LB, LR, LL, Two Hub, Polyvinyl Chloride (PVC) Coated, Urethane Lined, Iron Conduit Bodies With Cover	254.55	53.59
		For Elevated Installation >10' To 15' Above Floor, Add	*10.72*	
		For Elevated Installation >15' To 20' Above Floor, Add	*21.43*	
		For Elevated Installation >20' To 25' Above Floor, Add	*26.79*	
		For Elevated Installation >25' To 30' Above Floor, Add	*37.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*42.87*	
		For Elevated Installation >35' To 40' Above Floor, Add	*53.59*	
		For Elevated Installation >40' Above Floor, Add	*58.94*	
		For Work In Restricted Working Space, Add	*32.15*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*32.15*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1028	EA	2" Type C, LB, LR, LL, Two Hub, Polyvinyl Chloride (PVC) Coated, Urethane Lined, Iron Conduit Bodies With Cover	345.89	64.31
		For Elevated Installation >10' To 15' Above Floor, Add	*12.86*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.72*	
		For Elevated Installation >20' To 25' Above Floor, Add	*32.15*	
		For Elevated Installation >25' To 30' Above Floor, Add	*45.01*	
		For Elevated Installation >30' To 35' Above Floor, Add	*51.44*	
		For Elevated Installation >35' To 40' Above Floor, Add	*64.31*	
		For Elevated Installation >40' Above Floor, Add	*70.74*	
		For Work In Restricted Working Space, Add	*38.58*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*38.58*	
26 05 33 13-1029	EA	2-1/2" Type C, LB, LR, LL, Two Hub, Polyvinyl Chloride (PVC) Coated, Urethane Lined, Iron Conduit Bodies With Cover	579.61	90.43
		For Elevated Installation >10' To 15' Above Floor, Add	*18.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.17*	
		For Elevated Installation >20' To 25' Above Floor, Add	*45.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*63.30*	
		For Elevated Installation >30' To 35' Above Floor, Add	*72.34*	
		For Elevated Installation >35' To 40' Above Floor, Add	*90.43*	
		For Elevated Installation >40' Above Floor, Add	*99.47*	
		For Work In Restricted Working Space, Add	*54.26*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*54.26*	
26 05 33 13-1030	EA	3" Type C, LB, LR, LL, Two Hub, Polyvinyl Chloride (PVC) Coated, Urethane Lined, Iron Conduit Bodies With Cover	742.75	120.57
		For Elevated Installation >10' To 15' Above Floor, Add	*24.12*	
		For Elevated Installation >15' To 20' Above Floor, Add	*48.23*	
		For Elevated Installation >20' To 25' Above Floor, Add	*60.29*	
		For Elevated Installation >25' To 30' Above Floor, Add	*84.40*	
		For Elevated Installation >30' To 35' Above Floor, Add	*96.46*	
		For Elevated Installation >35' To 40' Above Floor, Add	*120.58*	
		For Elevated Installation >40' Above Floor, Add	*132.63*	
		For Work In Restricted Working Space, Add	*72.35*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*72.35*	
26 05 33 13-1031	EA	3-1/2" Type C, LB, LR, LL, Two Hub, Polyvinyl Chloride (PVC) Coated, Urethane Lined, Iron Conduit Bodies With Cover	1,030.19	150.71
		For Elevated Installation >10' To 15' Above Floor, Add	*30.14*	
		For Elevated Installation >15' To 20' Above Floor, Add	*60.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*75.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*105.50*	
		For Elevated Installation >30' To 35' Above Floor, Add	*120.57*	
		For Elevated Installation >35' To 40' Above Floor, Add	*150.71*	
		For Elevated Installation >40' Above Floor, Add	*165.78*	
		For Work In Restricted Working Space, Add	*90.43*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*90.43*	
26 05 33 13-1032	EA	4" Type C, LB, LR, LL, Two Hub, Polyvinyl Chloride (PVC) Coated, Urethane Lined, Iron Conduit Bodies With Cover	1,183.97	183.53
		For Elevated Installation >10' To 15' Above Floor, Add	*36.71*	
		For Elevated Installation >15' To 20' Above Floor, Add	*73.41*	
		For Elevated Installation >20' To 25' Above Floor, Add	*91.77*	
		For Elevated Installation >25' To 30' Above Floor, Add	*128.47*	
		For Elevated Installation >30' To 35' Above Floor, Add	*146.83*	
		For Elevated Installation >35' To 40' Above Floor, Add	*183.54*	
		For Elevated Installation >40' Above Floor, Add	*201.89*	
		For Work In Restricted Working Space, Add	*110.12*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*110.12*	

26 05 33 13-1033 Type X, Four Hub, Polyvinyl Chloride (PVC) Coated, Urethane Lined, Iron Conduit Bodies With Cover *(26 05 33 13-0848)*

Note: Suitable for use in hazardous locations. Class I, Div 2.

26 05 33 13-1034	EA	1/2" Type X, Four Hub, Polyvinyl Chloride (PVC) Coated, Urethane Lined, Iron Conduit Bodies With Cover	157.25	42.20
		For Elevated Installation >10' To 15' Above Floor, Add	*8.44*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.88*	
		For Elevated Installation >20' To 25' Above Floor, Add	*21.10*	
		For Elevated Installation >25' To 30' Above Floor, Add	*29.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*33.76*	
		For Elevated Installation >35' To 40' Above Floor, Add	*42.20*	
		For Elevated Installation >40' Above Floor, Add	*46.41*	
		For Work In Restricted Working Space, Add	*25.32*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*25.32*	
26 05 33 13-1035	EA	3/4" Type X, Four Hub, Polyvinyl Chloride (PVC) Coated, Urethane Lined, Iron Conduit Bodies With Cover	179.09	46.89
		For Elevated Installation >10' To 15' Above Floor, Add	*9.38*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.76*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.45*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*37.51*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.89*	
		For Elevated Installation >40' Above Floor, Add	*51.58*	
		For Work In Restricted Working Space, Add	*28.13*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*28.13*	

copyright 2026 The Gordian Group, Inc.

	MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1036		EA	1" Type X, Four Hub, Polyvinyl Chloride (PVC) Coated, Urethane Lined, Iron Conduit Bodies With Cover	218.06	51.58
			For Elevated Installation >10' To 15' Above Floor, Add	*10.32*	
			For Elevated Installation >15' To 20' Above Floor, Add	*20.63*	
			For Elevated Installation >20' To 25' Above Floor, Add	*25.79*	
			For Elevated Installation >25' To 30' Above Floor, Add	*36.10*	
			For Elevated Installation >30' To 35' Above Floor, Add	*41.26*	
			For Elevated Installation >35' To 40' Above Floor, Add	*51.58*	
			For Elevated Installation >40' Above Floor, Add	*56.73*	
			For Work In Restricted Working Space, Add	*30.95*	
			For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*30.95*	
26 05 33 13-1037		EA	1-1/4" Type X, Four Hub, Polyvinyl Chloride (PVC) Coated, Urethane Lined, Iron Conduit Bodies With Cover	292.01	58.94
			For Elevated Installation >10' To 15' Above Floor, Add	*11.79*	
			For Elevated Installation >15' To 20' Above Floor, Add	*23.58*	
			For Elevated Installation >20' To 25' Above Floor, Add	*29.47*	
			For Elevated Installation >25' To 30' Above Floor, Add	*41.26*	
			For Elevated Installation >30' To 35' Above Floor, Add	*47.16*	
			For Elevated Installation >35' To 40' Above Floor, Add	*58.95*	
			For Elevated Installation >40' Above Floor, Add	*64.84*	
			For Work In Restricted Working Space, Add	*35.37*	
			For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*35.37*	
26 05 33 13-1038		EA	1-1/2" Type X, Four Hub, Polyvinyl Chloride (PVC) Coated, Urethane Lined, Iron Conduit Bodies With Cover	344.44	64.31
			For Elevated Installation >10' To 15' Above Floor, Add	*12.86*	
			For Elevated Installation >15' To 20' Above Floor, Add	*25.72*	
			For Elevated Installation >20' To 25' Above Floor, Add	*32.15*	
			For Elevated Installation >25' To 30' Above Floor, Add	*45.01*	
			For Elevated Installation >30' To 35' Above Floor, Add	*51.44*	
			For Elevated Installation >35' To 40' Above Floor, Add	*64.31*	
			For Elevated Installation >40' Above Floor, Add	*70.74*	
			For Work In Restricted Working Space, Add	*38.58*	
			For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*38.58*	
26 05 33 13-1039		EA	2" Type X, Four Hub, Polyvinyl Chloride (PVC) Coated, Urethane Lined, Iron Conduit Bodies With Cover	468.09	79.04
			For Elevated Installation >10' To 15' Above Floor, Add	*15.81*	
			For Elevated Installation >15' To 20' Above Floor, Add	*31.62*	
			For Elevated Installation >20' To 25' Above Floor, Add	*39.52*	
			For Elevated Installation >25' To 30' Above Floor, Add	*55.33*	
			For Elevated Installation >30' To 35' Above Floor, Add	*63.23*	
			For Elevated Installation >35' To 40' Above Floor, Add	*79.04*	
			For Elevated Installation >40' Above Floor, Add	*86.94*	
			For Work In Restricted Working Space, Add	*47.42*	
			For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*47.42*	

26 05 33 13-1040 Type T Or TB, Three Hub, Polyvinyl Chloride (PVC) Coated, Urethane Lined, Iron Conduit Bodies With Cover *(26 05 33 13-0848)*

Note: Suitable for use in hazardous locations. Class I, Div 2.

26 05 33 13-1041		EA	1/2" Type T Or TB, Three Hub, Polyvinyl Chloride (PVC) Coated, Urethane Lined, Iron Conduit Bodies With Cover	138.36	36.84
			For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
			For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
			For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
			For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
			For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
			For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
			For Elevated Installation >40' Above Floor, Add	*40.52*	
			For Work In Restricted Working Space, Add	*22.10*	
			For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*22.10*	
26 05 33 13-1042		EA	3/4" Type T Or TB, Three Hub, Polyvinyl Chloride (PVC) Coated, Urethane Lined, Iron Conduit Bodies With Cover	157.97	42.87
			For Elevated Installation >10' To 15' Above Floor, Add	*8.57*	
			For Elevated Installation >15' To 20' Above Floor, Add	*17.15*	
			For Elevated Installation >20' To 25' Above Floor, Add	*21.44*	
			For Elevated Installation >25' To 30' Above Floor, Add	*30.01*	
			For Elevated Installation >30' To 35' Above Floor, Add	*34.30*	
			For Elevated Installation >35' To 40' Above Floor, Add	*42.87*	
			For Elevated Installation >40' Above Floor, Add	*47.16*	
			For Work In Restricted Working Space, Add	*25.72*	
			For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*25.72*	
26 05 33 13-1043		EA	1" Type T Or TB, Three Hub, Polyvinyl Chloride (PVC) Coated, Urethane Lined, Iron Conduit Bodies With Cover	190.56	46.89
			For Elevated Installation >10' To 15' Above Floor, Add	*9.38*	
			For Elevated Installation >15' To 20' Above Floor, Add	*18.76*	
			For Elevated Installation >20' To 25' Above Floor, Add	*23.45*	
			For Elevated Installation >25' To 30' Above Floor, Add	*32.82*	
			For Elevated Installation >30' To 35' Above Floor, Add	*37.51*	
			For Elevated Installation >35' To 40' Above Floor, Add	*46.89*	
			For Elevated Installation >40' Above Floor, Add	*51.58*	
			For Work In Restricted Working Space, Add	*28.13*	
			For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*28.13*	
26 05 33 13-1044		EA	1-1/4" Type T Or TB, Three Hub, Polyvinyl Chloride (PVC) Coated, Urethane Lined, Iron Conduit Bodies With Cover	243.41	53.59
			For Elevated Installation >10' To 15' Above Floor, Add	*10.72*	
			For Elevated Installation >15' To 20' Above Floor, Add	*21.43*	
			For Elevated Installation >20' To 25' Above Floor, Add	*26.79*	
			For Elevated Installation >25' To 30' Above Floor, Add	*37.51*	
			For Elevated Installation >30' To 35' Above Floor, Add	*42.87*	
			For Elevated Installation >35' To 40' Above Floor, Add	*53.59*	
			For Elevated Installation >40' Above Floor, Add	*58.94*	
			For Work In Restricted Working Space, Add	*32.15*	
			For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*32.15*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1045	EA	1-1/2" Type T Or TB, Three Hub, Polyvinyl Chloride (PVC) Coated, Urethane Lined, Iron Conduit Bodies With Cover	288.03	58.94
		For Elevated Installation >10' To 15' Above Floor, Add	*11.79*	
		For Elevated Installation >15' To 20' Above Floor, Add	*23.58*	
		For Elevated Installation >20' To 25' Above Floor, Add	*29.47*	
		For Elevated Installation >25' To 30' Above Floor, Add	*41.26*	
		For Elevated Installation >30' To 35' Above Floor, Add	*47.16*	
		For Elevated Installation >35' To 40' Above Floor, Add	*58.95*	
		For Elevated Installation >40' Above Floor, Add	*64.84*	
		For Work In Restricted Working Space, Add	*35.37*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*35.37*	
26 05 33 13-1046	EA	2" Type T Or TB, Three Hub, Polyvinyl Chloride (PVC) Coated, Urethane Lined, Iron Conduit Bodies With Cover	385.06	68.99
		For Elevated Installation >10' To 15' Above Floor, Add	*13.80*	
		For Elevated Installation >15' To 20' Above Floor, Add	*27.60*	
		For Elevated Installation >20' To 25' Above Floor, Add	*34.50*	
		For Elevated Installation >25' To 30' Above Floor, Add	*48.30*	
		For Elevated Installation >30' To 35' Above Floor, Add	*55.20*	
		For Elevated Installation >35' To 40' Above Floor, Add	*69.00*	
		For Elevated Installation >40' Above Floor, Add	*75.89*	
		For Work In Restricted Working Space, Add	*41.40*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*41.40*	
26 05 33 13-1047	EA	2-1/2" Type T Or TB, Three Hub, Polyvinyl Chloride (PVC) Coated, Urethane Lined, Iron Conduit Bodies With Cover	618.31	100.47
		For Elevated Installation >10' To 15' Above Floor, Add	*20.10*	
		For Elevated Installation >15' To 20' Above Floor, Add	*40.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*50.24*	
		For Elevated Installation >25' To 30' Above Floor, Add	*70.34*	
		For Elevated Installation >30' To 35' Above Floor, Add	*80.38*	
		For Elevated Installation >35' To 40' Above Floor, Add	*100.48*	
		For Elevated Installation >40' Above Floor, Add	*110.53*	
		For Work In Restricted Working Space, Add	*60.29*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*60.29*	
26 05 33 13-1048	EA	3" Type T Or TB, Three Hub, Polyvinyl Chloride (PVC) Coated, Urethane Lined, Iron Conduit Bodies With Cover	818.15	130.62
		For Elevated Installation >10' To 15' Above Floor, Add	*26.12*	
		For Elevated Installation >15' To 20' Above Floor, Add	*52.25*	
		For Elevated Installation >20' To 25' Above Floor, Add	*65.31*	
		For Elevated Installation >25' To 30' Above Floor, Add	*91.43*	
		For Elevated Installation >30' To 35' Above Floor, Add	*104.49*	
		For Elevated Installation >35' To 40' Above Floor, Add	*130.62*	
		For Elevated Installation >40' Above Floor, Add	*143.68*	
		For Work In Restricted Working Space, Add	*78.37*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*78.37*	
26 05 33 13-1049	EA	3-1/2" Type T Or TB, Three Hub, Polyvinyl Chloride (PVC) Coated, Urethane Lined, Iron Conduit Bodies With Cover	1,121.99	160.76
		For Elevated Installation >10' To 15' Above Floor, Add	*32.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*64.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*80.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*112.53*	
		For Elevated Installation >30' To 35' Above Floor, Add	*128.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*160.76*	
		For Elevated Installation >40' Above Floor, Add	*176.84*	
		For Work In Restricted Working Space, Add	*96.46*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*96.46*	
26 05 33 13-1050	EA	4" Type T Or TB, Three Hub, Polyvinyl Chloride (PVC) Coated, Urethane Lined, Iron Conduit Bodies With Cover	1,255.59	193.58
		For Elevated Installation >10' To 15' Above Floor, Add	*38.72*	
		For Elevated Installation >15' To 20' Above Floor, Add	*77.44*	
		For Elevated Installation >20' To 25' Above Floor, Add	*96.80*	
		For Elevated Installation >25' To 30' Above Floor, Add	*135.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*154.87*	
		For Elevated Installation >35' To 40' Above Floor, Add	*193.59*	
		For Elevated Installation >40' Above Floor, Add	*212.95*	
		For Work In Restricted Working Space, Add	*116.15*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*116.15*	

26 05 33 13-1051 Replacement Iron Conduit Body Covers, Polyvinyl Chloride (PVC) Coated, Urethane Lined *(26 05 33 13-0848)*

26 05 33 13-1052	EA	1/2" Replacement Iron Conduit Body Covers, Polyvinyl Chloride (PVC) Coated, Urethane Lined	27.91	4.02
		For Elevated Installation >10' To 15' Above Floor, Add	*0.80*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.61*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.01*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.81*	
		For Elevated Installation >30' To 35' Above Floor, Add	*3.22*	
		For Elevated Installation >35' To 40' Above Floor, Add	*4.02*	
		For Elevated Installation >40' Above Floor, Add	*4.42*	
		For Work In Restricted Working Space, Add	*2.41*	
26 05 33 13-1053	EA	3/4" Replacement Iron Conduit Body Covers, Polyvinyl Chloride (PVC) Coated, Urethane Lined	31.33	4.69
		For Elevated Installation >10' To 15' Above Floor, Add	*0.94*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.88*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.35*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.28*	
		For Elevated Installation >30' To 35' Above Floor, Add	*3.75*	
		For Elevated Installation >35' To 40' Above Floor, Add	*4.69*	
		For Elevated Installation >40' Above Floor, Add	*5.16*	
		For Work In Restricted Working Space, Add	*2.81*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1054	EA	1" Replacement Iron Conduit Body Covers, Polyvinyl Chloride (PVC) Coated, Urethane Lined	40.84	6.03
		For Elevated Installation >10' To 15' Above Floor, Add	*1.21*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.41*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.01*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.22*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.82*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.03*	
		For Elevated Installation >40' Above Floor, Add	*6.63*	
		For Work In Restricted Working Space, Add	*3.62*	
26 05 33 13-1055	EA	1-1/4" Replacement Iron Conduit Body Covers, Polyvinyl Chloride (PVC) Coated, Urethane Lined	52.50	7.37
		For Elevated Installation >10' To 15' Above Floor, Add	*1.47*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.95*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.69*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.16*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.90*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.37*	
		For Elevated Installation >40' Above Floor, Add	*8.11*	
		For Work In Restricted Working Space, Add	*4.42*	
26 05 33 13-1056	EA	1-1/2" Replacement Iron Conduit Body Covers, Polyvinyl Chloride (PVC) Coated, Urethane Lined	58.83	8.70
		For Elevated Installation >10' To 15' Above Floor, Add	*1.74*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.48*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.71*	
		For Elevated Installation >40' Above Floor, Add	*9.58*	
		For Work In Restricted Working Space, Add	*5.23*	
26 05 33 13-1057	EA	2" Replacement Iron Conduit Body Covers, Polyvinyl Chloride (PVC) Coated, Urethane Lined	72.73	10.05
		For Elevated Installation >10' To 15' Above Floor, Add	*2.01*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.02*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.04*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.05*	
		For Elevated Installation >40' Above Floor, Add	*11.05*	
		For Work In Restricted Working Space, Add	*6.03*	
26 05 33 13-1058	EA	2-1/2" Replacement Iron Conduit Body Covers, Polyvinyl Chloride (PVC) Coated, Urethane Lined	93.94	11.39
		For Elevated Installation >10' To 15' Above Floor, Add	*2.28*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.55*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.69*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.97*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.11*	
		For Elevated Installation >35' To 40' Above Floor, Add	*11.39*	
		For Elevated Installation >40' Above Floor, Add	*12.52*	
		For Work In Restricted Working Space, Add	*6.83*	
26 05 33 13-1059	EA	3" Replacement Iron Conduit Body Covers, Polyvinyl Chloride (PVC) Coated, Urethane Lined	103.32	16.07
		For Elevated Installation >10' To 15' Above Floor, Add	*3.22*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.43*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.04*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.25*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.86*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.08*	
		For Elevated Installation >40' Above Floor, Add	*17.68*	
		For Work In Restricted Working Space, Add	*9.65*	
26 05 33 13-1060	EA	3-1/2" Replacement Iron Conduit Body Covers, Polyvinyl Chloride (PVC) Coated, Urethane Lined	125.41	18.09
		For Elevated Installation >10' To 15' Above Floor, Add	*3.62*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.23*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.04*	
		For Elevated Installation >25' To 30' Above Floor, Add	*12.66*	
		For Elevated Installation >30' To 35' Above Floor, Add	*14.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*18.09*	
		For Elevated Installation >40' Above Floor, Add	*19.89*	
		For Work In Restricted Working Space, Add	*10.85*	
26 05 33 13-1061	EA	4" Replacement Iron Conduit Body Covers, Polyvinyl Chloride (PVC) Coated, Urethane Lined	134.78	22.77
		For Elevated Installation >10' To 15' Above Floor, Add	*4.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.11*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.39*	
		For Elevated Installation >25' To 30' Above Floor, Add	*15.94*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.22*	
		For Elevated Installation >35' To 40' Above Floor, Add	*22.77*	
		For Elevated Installation >40' Above Floor, Add	*25.05*	
		For Work In Restricted Working Space, Add	*13.66*	

26 05 33 13-1062 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EYS Sealing Conduit Bodies *(26 05 33 13-0848)*

26 05 33 13-1063	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EYS Sealing Conduit Body	135.41	32.15
		For Elevated Installation >10' To 15' Above Floor, Add	*6.43*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.86*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.08*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.72*	
		For Elevated Installation >35' To 40' Above Floor, Add	*32.16*	
		For Elevated Installation >40' Above Floor, Add	*35.37*	
		For Work In Restricted Working Space, Add	*19.29*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*19.29*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1064	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EYS Sealing Conduit Body	150.14	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*22.10*	
26 05 33 13-1065	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EYS Sealing Conduit Body	175.24	42.20
		For Elevated Installation >10' To 15' Above Floor, Add	*8.44*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.88*	
		For Elevated Installation >20' To 25' Above Floor, Add	*21.10*	
		For Elevated Installation >25' To 30' Above Floor, Add	*29.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*33.76*	
		For Elevated Installation >35' To 40' Above Floor, Add	*42.20*	
		For Elevated Installation >40' Above Floor, Add	*46.42*	
		For Work In Restricted Working Space, Add	*25.32*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*25.32*	
26 05 33 13-1066	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EYS Sealing Conduit Body	207.82	48.89
		For Elevated Installation >10' To 15' Above Floor, Add	*9.78*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.56*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.45*	
		For Elevated Installation >25' To 30' Above Floor, Add	*34.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*39.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*48.90*	
		For Elevated Installation >40' Above Floor, Add	*53.79*	
		For Work In Restricted Working Space, Add	*29.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*29.34*	
26 05 33 13-1067	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EYS Sealing Conduit Body	257.55	53.59
		For Elevated Installation >10' To 15' Above Floor, Add	*10.72*	
		For Elevated Installation >15' To 20' Above Floor, Add	*21.43*	
		For Elevated Installation >20' To 25' Above Floor, Add	*26.79*	
		For Elevated Installation >25' To 30' Above Floor, Add	*37.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*42.87*	
		For Elevated Installation >35' To 40' Above Floor, Add	*53.59*	
		For Elevated Installation >40' Above Floor, Add	*58.94*	
		For Work In Restricted Working Space, Add	*32.15*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*32.15*	
26 05 33 13-1068	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EYS Sealing Conduit Body	312.04	64.31
		For Elevated Installation >10' To 15' Above Floor, Add	*12.86*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.72*	
		For Elevated Installation >20' To 25' Above Floor, Add	*32.15*	
		For Elevated Installation >25' To 30' Above Floor, Add	*45.01*	
		For Elevated Installation >30' To 35' Above Floor, Add	*51.44*	
		For Elevated Installation >35' To 40' Above Floor, Add	*64.31*	
		For Elevated Installation >40' Above Floor, Add	*70.74*	
		For Work In Restricted Working Space, Add	*38.58*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*38.58*	
26 05 33 13-1069	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EYS Sealing Conduit Body	451.46	90.43
		For Elevated Installation >10' To 15' Above Floor, Add	*18.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.17*	
		For Elevated Installation >20' To 25' Above Floor, Add	*45.21*	
		For Elevated Installation >25' To 30' Above Floor, Add	*63.30*	
		For Elevated Installation >30' To 35' Above Floor, Add	*72.34*	
		For Elevated Installation >35' To 40' Above Floor, Add	*90.43*	
		For Elevated Installation >40' Above Floor, Add	*99.47*	
		For Work In Restricted Working Space, Add	*54.26*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*54.26*	
26 05 33 13-1070	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EYS Sealing Conduit Body	579.60	120.57
		For Elevated Installation >10' To 15' Above Floor, Add	*24.11*	
		For Elevated Installation >15' To 20' Above Floor, Add	*48.23*	
		For Elevated Installation >20' To 25' Above Floor, Add	*60.29*	
		For Elevated Installation >25' To 30' Above Floor, Add	*84.40*	
		For Elevated Installation >30' To 35' Above Floor, Add	*96.46*	
		For Elevated Installation >35' To 40' Above Floor, Add	*120.57*	
		For Elevated Installation >40' Above Floor, Add	*132.63*	
		For Work In Restricted Working Space, Add	*72.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*72.34*	
26 05 33 13-1071	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EYS Sealing Conduit Body	1,145.73	150.71
		For Elevated Installation >10' To 15' Above Floor, Add	*30.14*	
		For Elevated Installation >15' To 20' Above Floor, Add	*60.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*75.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*105.50*	
		For Elevated Installation >30' To 35' Above Floor, Add	*120.57*	
		For Elevated Installation >35' To 40' Above Floor, Add	*150.71*	
		For Elevated Installation >40' Above Floor, Add	*165.78*	
		For Work In Restricted Working Space, Add	*90.43*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*90.43*	

copyright 2026 The Gordian Group, Inc.

CSI	MINOR UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1072	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EYS Sealing Conduit Body	1,672.19	183.53
		For Elevated Installation >10' To 15' Above Floor, Add	*36.71*	
		For Elevated Installation >15' To 20' Above Floor, Add	*73.41*	
		For Elevated Installation >20' To 25' Above Floor, Add	*91.77*	
		For Elevated Installation >25' To 30' Above Floor, Add	*128.47*	
		For Elevated Installation >30' To 35' Above Floor, Add	*146.83*	
		For Elevated Installation >35' To 40' Above Floor, Add	*183.54*	
		For Elevated Installation >40' Above Floor, Add	*201.89*	
		For Work In Restricted Working Space, Add	*110.12*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*110.12*	

26 05 33 13-1073 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EYD Sealing Conduit Bodies *(26 05 33 13-0848)*

26 05 33 13-1074	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EYD Sealing Conduit Body	227.96	32.15
		For Elevated Installation >10' To 15' Above Floor, Add	*6.43*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.86*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.08*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.72*	
		For Elevated Installation >35' To 40' Above Floor, Add	*32.16*	
		For Elevated Installation >40' Above Floor, Add	*35.37*	
		For Work In Restricted Working Space, Add	*19.29*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*19.29*	
26 05 33 13-1075	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EYD Sealing Conduit Body	245.83	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*22.10*	
26 05 33 13-1076	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EYD Sealing Conduit Body	280.75	42.20
		For Elevated Installation >10' To 15' Above Floor, Add	*8.44*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.88*	
		For Elevated Installation >20' To 25' Above Floor, Add	*21.10*	
		For Elevated Installation >25' To 30' Above Floor, Add	*29.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*33.76*	
		For Elevated Installation >35' To 40' Above Floor, Add	*42.20*	
		For Elevated Installation >40' Above Floor, Add	*46.42*	
		For Work In Restricted Working Space, Add	*25.32*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*25.32*	
26 05 33 13-1077	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EYD Sealing Conduit Body	314.53	48.89
		For Elevated Installation >10' To 15' Above Floor, Add	*9.78*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.56*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.45*	
		For Elevated Installation >25' To 30' Above Floor, Add	*34.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*39.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*48.90*	
		For Elevated Installation >40' Above Floor, Add	*53.79*	
		For Work In Restricted Working Space, Add	*29.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*29.34*	
26 05 33 13-1078	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EYD Sealing Conduit Body	380.40	53.59
		For Elevated Installation >10' To 15' Above Floor, Add	*10.72*	
		For Elevated Installation >15' To 20' Above Floor, Add	*21.43*	
		For Elevated Installation >20' To 25' Above Floor, Add	*26.79*	
		For Elevated Installation >25' To 30' Above Floor, Add	*37.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*42.87*	
		For Elevated Installation >35' To 40' Above Floor, Add	*53.59*	
		For Elevated Installation >40' Above Floor, Add	*58.94*	
		For Work In Restricted Working Space, Add	*32.15*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*32.15*	
26 05 33 13-1079	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EYD Sealing Conduit Body	428.89	64.31
		For Elevated Installation >10' To 15' Above Floor, Add	*12.86*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.72*	
		For Elevated Installation >20' To 25' Above Floor, Add	*32.15*	
		For Elevated Installation >25' To 30' Above Floor, Add	*45.01*	
		For Elevated Installation >30' To 35' Above Floor, Add	*51.44*	
		For Elevated Installation >35' To 40' Above Floor, Add	*64.31*	
		For Elevated Installation >40' Above Floor, Add	*70.74*	
		For Work In Restricted Working Space, Add	*38.58*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*38.58*	
26 05 33 13-1080	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EYD Sealing Conduit Body	603.40	90.43
		For Elevated Installation >10' To 15' Above Floor, Add	*18.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.17*	
		For Elevated Installation >20' To 25' Above Floor, Add	*45.21*	
		For Elevated Installation >25' To 30' Above Floor, Add	*63.30*	
		For Elevated Installation >30' To 35' Above Floor, Add	*72.34*	
		For Elevated Installation >35' To 40' Above Floor, Add	*90.43*	
		For Elevated Installation >40' Above Floor, Add	*99.47*	
		For Work In Restricted Working Space, Add	*54.26*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*54.26*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1081	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EYD Sealing Conduit Body	839.79	120.57
		For Elevated Installation >10' To 15' Above Floor, Add	*24.11*	
		For Elevated Installation >15' To 20' Above Floor, Add	*48.23*	
		For Elevated Installation >20' To 25' Above Floor, Add	*60.29*	
		For Elevated Installation >25' To 30' Above Floor, Add	*84.40*	
		For Elevated Installation >30' To 35' Above Floor, Add	*96.46*	
		For Elevated Installation >35' To 40' Above Floor, Add	*120.57*	
		For Elevated Installation >40' Above Floor, Add	*132.63*	
		For Work In Restricted Working Space, Add	*72.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*72.34*	
26 05 33 13-1082	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EYD Sealing Conduit Body	1,221.29	150.71
		For Elevated Installation >10' To 15' Above Floor, Add	*30.14*	
		For Elevated Installation >15' To 20' Above Floor, Add	*60.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*75.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*105.50*	
		For Elevated Installation >30' To 35' Above Floor, Add	*120.57*	
		For Elevated Installation >35' To 40' Above Floor, Add	*150.71*	
		For Elevated Installation >40' Above Floor, Add	*165.78*	
		For Work In Restricted Working Space, Add	*90.43*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*90.43*	
26 05 33 13-1083	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EYD Sealing Conduit Body	1,771.07	183.53
		For Elevated Installation >10' To 15' Above Floor, Add	*36.71*	
		For Elevated Installation >15' To 20' Above Floor, Add	*73.41*	
		For Elevated Installation >20' To 25' Above Floor, Add	*91.77*	
		For Elevated Installation >25' To 30' Above Floor, Add	*128.47*	
		For Elevated Installation >30' To 35' Above Floor, Add	*146.83*	
		For Elevated Installation >35' To 40' Above Floor, Add	*183.54*	
		For Elevated Installation >40' Above Floor, Add	*201.89*	
		For Work In Restricted Working Space, Add	*110.12*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*110.12*	

26 05 33 13-1084 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EZS Sealing Conduit Bodies *(26 05 33 13-0848)*

26 05 33 13-1085	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EZS Sealing Conduit Body	183.41	32.15
		For Elevated Installation >10' To 15' Above Floor, Add	*6.43*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.86*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.08*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.72*	
		For Elevated Installation >35' To 40' Above Floor, Add	*32.16*	
		For Elevated Installation >40' Above Floor, Add	*35.37*	
		For Work In Restricted Working Space, Add	*19.29*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*19.29*	
26 05 33 13-1086	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EZS Sealing Conduit Body	195.94	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*22.10*	
26 05 33 13-1087	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EZS Sealing Conduit Body	225.10	42.20
		For Elevated Installation >10' To 15' Above Floor, Add	*8.44*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.88*	
		For Elevated Installation >20' To 25' Above Floor, Add	*21.10*	
		For Elevated Installation >25' To 30' Above Floor, Add	*29.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*33.76*	
		For Elevated Installation >35' To 40' Above Floor, Add	*42.20*	
		For Elevated Installation >40' Above Floor, Add	*46.42*	
		For Work In Restricted Working Space, Add	*25.32*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*25.32*	
26 05 33 13-1088	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EZS Sealing Conduit Body	251.42	48.89
		For Elevated Installation >10' To 15' Above Floor, Add	*9.78*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.56*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.45*	
		For Elevated Installation >25' To 30' Above Floor, Add	*34.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*39.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*48.90*	
		For Elevated Installation >40' Above Floor, Add	*53.79*	
		For Work In Restricted Working Space, Add	*29.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*29.34*	
26 05 33 13-1089	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EZS Sealing Conduit Body	343.65	53.59
		For Elevated Installation >10' To 15' Above Floor, Add	*10.72*	
		For Elevated Installation >15' To 20' Above Floor, Add	*21.43*	
		For Elevated Installation >20' To 25' Above Floor, Add	*26.79*	
		For Elevated Installation >25' To 30' Above Floor, Add	*37.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*42.87*	
		For Elevated Installation >35' To 40' Above Floor, Add	*53.59*	
		For Elevated Installation >40' Above Floor, Add	*58.94*	
		For Work In Restricted Working Space, Add	*32.15*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*32.15*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1090	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EZS Sealing Conduit Body	431.11	64.31
		For Elevated Installation >10' To 15' Above Floor, Add	*12.86*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.72*	
		For Elevated Installation >20' To 25' Above Floor, Add	*32.15*	
		For Elevated Installation >25' To 30' Above Floor, Add	*45.01*	
		For Elevated Installation >30' To 35' Above Floor, Add	*51.44*	
		For Elevated Installation >35' To 40' Above Floor, Add	*64.31*	
		For Elevated Installation >40' Above Floor, Add	*70.74*	
		For Work In Restricted Working Space, Add	*38.58*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*38.58*	
26 05 33 13-1091	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EZS Sealing Conduit Body	668.01	90.43
		For Elevated Installation >10' To 15' Above Floor, Add	*18.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.17*	
		For Elevated Installation >20' To 25' Above Floor, Add	*45.21*	
		For Elevated Installation >25' To 30' Above Floor, Add	*63.30*	
		For Elevated Installation >30' To 35' Above Floor, Add	*72.34*	
		For Elevated Installation >35' To 40' Above Floor, Add	*90.43*	
		For Elevated Installation >40' Above Floor, Add	*99.47*	
		For Work In Restricted Working Space, Add	*54.26*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*54.26*	
26 05 33 13-1092	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EZS Sealing Conduit Body	971.25	120.57
		For Elevated Installation >10' To 15' Above Floor, Add	*24.11*	
		For Elevated Installation >15' To 20' Above Floor, Add	*48.23*	
		For Elevated Installation >20' To 25' Above Floor, Add	*60.29*	
		For Elevated Installation >25' To 30' Above Floor, Add	*84.40*	
		For Elevated Installation >30' To 35' Above Floor, Add	*96.46*	
		For Elevated Installation >35' To 40' Above Floor, Add	*120.57*	
		For Elevated Installation >40' Above Floor, Add	*132.63*	
		For Work In Restricted Working Space, Add	*72.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*72.34*	
26 05 33 13-1093	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EZS Sealing Conduit Body	1,221.29	150.71
		For Elevated Installation >10' To 15' Above Floor, Add	*30.14*	
		For Elevated Installation >15' To 20' Above Floor, Add	*60.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*75.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*105.50*	
		For Elevated Installation >30' To 35' Above Floor, Add	*120.57*	
		For Elevated Installation >35' To 40' Above Floor, Add	*150.71*	
		For Elevated Installation >40' Above Floor, Add	*165.78*	
		For Work In Restricted Working Space, Add	*90.43*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*90.43*	

26 05 33 13-1094 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EZD Sealing Conduit Bodies *(26 05 33 13-0848)*

26 05 33 13-1095	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EZD Sealing Conduit Body	241.04	32.15
		For Elevated Installation >10' To 15' Above Floor, Add	*6.43*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.86*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.08*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.72*	
		For Elevated Installation >35' To 40' Above Floor, Add	*32.16*	
		For Elevated Installation >40' Above Floor, Add	*35.37*	
		For Work In Restricted Working Space, Add	*19.29*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*19.29*	
26 05 33 13-1096	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EZD Sealing Conduit Body	267.65	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*22.10*	
26 05 33 13-1097	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EZD Sealing Conduit Body	331.21	42.20
		For Elevated Installation >10' To 15' Above Floor, Add	*8.44*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.88*	
		For Elevated Installation >20' To 25' Above Floor, Add	*21.10*	
		For Elevated Installation >25' To 30' Above Floor, Add	*29.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*33.76*	
		For Elevated Installation >35' To 40' Above Floor, Add	*42.20*	
		For Elevated Installation >40' Above Floor, Add	*46.42*	
		For Work In Restricted Working Space, Add	*25.32*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*25.32*	
26 05 33 13-1098	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EZD Sealing Conduit Body	407.86	48.89
		For Elevated Installation >10' To 15' Above Floor, Add	*9.78*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.56*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.45*	
		For Elevated Installation >25' To 30' Above Floor, Add	*34.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*39.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*48.90*	
		For Elevated Installation >40' Above Floor, Add	*53.79*	
		For Work In Restricted Working Space, Add	*29.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*29.34*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1099	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EZD Sealing Conduit Body	564.68	53.59
		For Elevated Installation >10' To 15' Above Floor, Add	*10.72*	
		For Elevated Installation >15' To 20' Above Floor, Add	*21.43*	
		For Elevated Installation >20' To 25' Above Floor, Add	*26.79*	
		For Elevated Installation >25' To 30' Above Floor, Add	*37.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*42.87*	
		For Elevated Installation >35' To 40' Above Floor, Add	*53.59*	
		For Elevated Installation >40' Above Floor, Add	*58.94*	
		For Work In Restricted Working Space, Add	*32.15*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*32.15*	
26 05 33 13-1100	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) EZD Sealing Conduit Body	676.77	64.31
		For Elevated Installation >10' To 15' Above Floor, Add	*12.86*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.72*	
		For Elevated Installation >20' To 25' Above Floor, Add	*32.15*	
		For Elevated Installation >25' To 30' Above Floor, Add	*45.01*	
		For Elevated Installation >30' To 35' Above Floor, Add	*51.44*	
		For Elevated Installation >35' To 40' Above Floor, Add	*64.31*	
		For Elevated Installation >40' Above Floor, Add	*70.74*	
		For Work In Restricted Working Space, Add	*38.58*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*38.58*	

26 05 33 13-1101 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Split Couplings *(26 05 33 13-0848)*

26 05 33 13-1102	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Split Coupling	47.41	12.89
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.88*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
		For Work In Restricted Working Space, Add	*7.73*	
26 05 33 13-1103	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Split Coupling	62.64	15.46
		For Elevated Installation >10' To 15' Above Floor, Add	*3.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.46*	
		For Elevated Installation >40' Above Floor, Add	*17.00*	
		For Work In Restricted Working Space, Add	*9.27*	
26 05 33 13-1104	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Split Coupling	79.74	20.61
		For Elevated Installation >10' To 15' Above Floor, Add	*4.12*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.24*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.31*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.43*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.49*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.61*	
		For Elevated Installation >40' Above Floor, Add	*22.67*	
		For Work In Restricted Working Space, Add	*12.37*	
26 05 33 13-1105	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Split Coupling	109.34	25.76
		For Elevated Installation >10' To 15' Above Floor, Add	*5.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.76*	
		For Elevated Installation >40' Above Floor, Add	*28.34*	
		For Work In Restricted Working Space, Add	*15.46*	
26 05 33 13-1106	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Split Coupling	143.05	30.91
		For Elevated Installation >10' To 15' Above Floor, Add	*6.18*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.46*	
		For Elevated Installation >25' To 30' Above Floor, Add	*21.64*	
		For Elevated Installation >30' To 35' Above Floor, Add	*24.73*	
		For Elevated Installation >35' To 40' Above Floor, Add	*30.92*	
		For Elevated Installation >40' Above Floor, Add	*34.01*	
		For Work In Restricted Working Space, Add	*18.55*	
26 05 33 13-1107	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Split Coupling	243.88	36.07
		For Elevated Installation >10' To 15' Above Floor, Add	*7.21*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.43*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.04*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.25*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.86*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.07*	
		For Elevated Installation >40' Above Floor, Add	*39.68*	
		For Work In Restricted Working Space, Add	*21.64*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1108	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Split Coupling	352.83	41.22
		For Elevated Installation >10' To 15' Above Floor, Add	*8.25*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*20.61*	
		For Elevated Installation >25' To 30' Above Floor, Add	*28.86*	
		For Elevated Installation >30' To 35' Above Floor, Add	*32.98*	
		For Elevated Installation >35' To 40' Above Floor, Add	*41.23*	
		For Elevated Installation >40' Above Floor, Add	*45.35*	
		For Work In Restricted Working Space, Add	*24.74*	
26 05 33 13-1109	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Split Coupling	439.47	46.38
		For Elevated Installation >10' To 15' Above Floor, Add	*9.27*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.55*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.19*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.46*	
		For Elevated Installation >30' To 35' Above Floor, Add	*37.10*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.37*	
		For Elevated Installation >40' Above Floor, Add	*51.01*	
		For Work In Restricted Working Space, Add	*27.82*	
26 05 33 13-1110	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Split Coupling	610.27	54.10
		For Elevated Installation >10' To 15' Above Floor, Add	*10.82*	
		For Elevated Installation >15' To 20' Above Floor, Add	*21.64*	
		For Elevated Installation >20' To 25' Above Floor, Add	*27.05*	
		For Elevated Installation >25' To 30' Above Floor, Add	*37.87*	
		For Elevated Installation >30' To 35' Above Floor, Add	*43.28*	
		For Elevated Installation >35' To 40' Above Floor, Add	*54.11*	
		For Elevated Installation >40' Above Floor, Add	*59.52*	
		For Work In Restricted Working Space, Add	*32.46*	
26 05 33 13-1111	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Split Coupling	740.43	61.83
		For Elevated Installation >10' To 15' Above Floor, Add	*12.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*24.73*	
		For Elevated Installation >20' To 25' Above Floor, Add	*30.92*	
		For Elevated Installation >25' To 30' Above Floor, Add	*43.28*	
		For Elevated Installation >30' To 35' Above Floor, Add	*49.46*	
		For Elevated Installation >35' To 40' Above Floor, Add	*61.83*	
		For Elevated Installation >40' Above Floor, Add	*68.01*	
		For Work In Restricted Working Space, Add	*37.10*	
26 05 33 13-1112	EA	5" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Split Coupling	1,184.92	97.90
		For Elevated Installation >10' To 15' Above Floor, Add	*19.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*39.16*	
		For Elevated Installation >20' To 25' Above Floor, Add	*48.95*	
		For Elevated Installation >25' To 30' Above Floor, Add	*68.53*	
		For Elevated Installation >30' To 35' Above Floor, Add	*78.32*	
		For Elevated Installation >35' To 40' Above Floor, Add	*97.90*	
		For Elevated Installation >40' Above Floor, Add	*107.69*	
		For Work In Restricted Working Space, Add	*58.74*	
26 05 33 13-1113	EA	6" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Split Coupling	1,621.95	149.43
		For Elevated Installation >10' To 15' Above Floor, Add	*29.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*59.77*	
		For Elevated Installation >20' To 25' Above Floor, Add	*74.71*	
		For Elevated Installation >25' To 30' Above Floor, Add	*104.60*	
		For Elevated Installation >30' To 35' Above Floor, Add	*119.54*	
		For Elevated Installation >35' To 40' Above Floor, Add	*149.43*	
		For Elevated Installation >40' Above Floor, Add	*164.37*	
		For Work In Restricted Working Space, Add	*89.66*	

26 05 33 13-1114 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Pulling Elbows *(26 05 33 13-0848)*

26 05 33 13-1115	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Pulling Elbow	173.24	32.15
		For Elevated Installation >10' To 15' Above Floor, Add	*6.43*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.86*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.08*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.72*	
		For Elevated Installation >35' To 40' Above Floor, Add	*32.16*	
		For Elevated Installation >40' Above Floor, Add	*35.37*	
		For Work In Restricted Working Space, Add	*19.29*	
26 05 33 13-1116	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Pulling Elbow	204.45	35.50
		For Elevated Installation >10' To 15' Above Floor, Add	*7.10*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.20*	
		For Elevated Installation >20' To 25' Above Floor, Add	*17.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*24.85*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*35.50*	
		For Elevated Installation >40' Above Floor, Add	*39.05*	
		For Work In Restricted Working Space, Add	*21.30*	
26 05 33 13-1117	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Pulling Elbow	226.03	42.20
		For Elevated Installation >10' To 15' Above Floor, Add	*8.44*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.88*	
		For Elevated Installation >20' To 25' Above Floor, Add	*21.10*	
		For Elevated Installation >25' To 30' Above Floor, Add	*29.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*33.76*	
		For Elevated Installation >35' To 40' Above Floor, Add	*42.20*	
		For Elevated Installation >40' Above Floor, Add	*46.42*	
		For Work In Restricted Working Space, Add	*25.32*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1118	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Pulling Elbow	323.17	48.89
		For Elevated Installation >10' To 15' Above Floor, Add	*9.78*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.56*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.45*	
		For Elevated Installation >25' To 30' Above Floor, Add	*34.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*39.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*48.90*	
		For Elevated Installation >40' Above Floor, Add	*53.79*	
		For Work In Restricted Working Space, Add	*29.34*	
26 05 33 13-1119	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Pulling Elbow	424.74	53.59
		For Elevated Installation >10' To 15' Above Floor, Add	*10.72*	
		For Elevated Installation >15' To 20' Above Floor, Add	*21.43*	
		For Elevated Installation >20' To 25' Above Floor, Add	*26.79*	
		For Elevated Installation >25' To 30' Above Floor, Add	*37.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*42.87*	
		For Elevated Installation >35' To 40' Above Floor, Add	*53.59*	
		For Elevated Installation >40' Above Floor, Add	*58.94*	
		For Work In Restricted Working Space, Add	*32.15*	
26 05 33 13-1120	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Pulling Elbow	459.37	64.31
		For Elevated Installation >10' To 15' Above Floor, Add	*12.86*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.72*	
		For Elevated Installation >20' To 25' Above Floor, Add	*32.15*	
		For Elevated Installation >25' To 30' Above Floor, Add	*45.01*	
		For Elevated Installation >30' To 35' Above Floor, Add	*51.44*	
		For Elevated Installation >35' To 40' Above Floor, Add	*64.31*	
		For Elevated Installation >40' Above Floor, Add	*70.74*	
		For Work In Restricted Working Space, Add	*38.58*	
26 05 33 13-1121	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Pulling Elbow	1,076.19	89.08
		For Elevated Installation >10' To 15' Above Floor, Add	*17.82*	
		For Elevated Installation >15' To 20' Above Floor, Add	*35.64*	
		For Elevated Installation >20' To 25' Above Floor, Add	*44.55*	
		For Elevated Installation >25' To 30' Above Floor, Add	*62.36*	
		For Elevated Installation >30' To 35' Above Floor, Add	*71.27*	
		For Elevated Installation >35' To 40' Above Floor, Add	*89.09*	
		For Elevated Installation >40' Above Floor, Add	*98.00*	
		For Work In Restricted Working Space, Add	*53.45*	
26 05 33 13-1122	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Pulling Elbow	1,139.37	120.57
		For Elevated Installation >10' To 15' Above Floor, Add	*24.12*	
		For Elevated Installation >15' To 20' Above Floor, Add	*48.23*	
		For Elevated Installation >20' To 25' Above Floor, Add	*60.29*	
		For Elevated Installation >25' To 30' Above Floor, Add	*84.40*	
		For Elevated Installation >30' To 35' Above Floor, Add	*96.46*	
		For Elevated Installation >35' To 40' Above Floor, Add	*120.58*	
		For Elevated Installation >40' Above Floor, Add	*132.63*	
		For Work In Restricted Working Space, Add	*72.35*	
26 05 33 13-1123	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Pulling Elbow	1,857.30	150.71
		For Elevated Installation >10' To 15' Above Floor, Add	*30.14*	
		For Elevated Installation >15' To 20' Above Floor, Add	*60.29*	
		For Elevated Installation >20' To 25' Above Floor, Add	*75.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*105.50*	
		For Elevated Installation >30' To 35' Above Floor, Add	*120.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*150.72*	
		For Elevated Installation >40' Above Floor, Add	*165.79*	
		For Work In Restricted Working Space, Add	*90.43*	
26 05 33 13-1124	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Pulling Elbow	1,938.04	183.53
		For Elevated Installation >10' To 15' Above Floor, Add	*36.71*	
		For Elevated Installation >15' To 20' Above Floor, Add	*73.42*	
		For Elevated Installation >20' To 25' Above Floor, Add	*91.77*	
		For Elevated Installation >25' To 30' Above Floor, Add	*128.48*	
		For Elevated Installation >30' To 35' Above Floor, Add	*146.84*	
		For Elevated Installation >35' To 40' Above Floor, Add	*183.55*	
		For Elevated Installation >40' Above Floor, Add	*201.90*	
		For Work In Restricted Working Space, Add	*110.13*	

26 05 33 13-1125 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Hazardous Locations Pulling Elbows *(26 05 33 13-0848)*

26 05 33 13-1126	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Hazardous Locations Pulling Elbow	250.77	32.15
		For Elevated Installation >10' To 15' Above Floor, Add	*6.43*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.86*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.08*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.72*	
		For Elevated Installation >35' To 40' Above Floor, Add	*32.16*	
		For Elevated Installation >40' Above Floor, Add	*35.37*	
		For Work In Restricted Working Space, Add	*19.29*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1127	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Hazardous Locations Pulling Elbow	285.69	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
26 05 33 13-1128	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Hazardous Locations Pulling Elbow	559.54	42.20
		For Elevated Installation >10' To 15' Above Floor, Add	*8.44*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.88*	
		For Elevated Installation >20' To 25' Above Floor, Add	*21.10*	
		For Elevated Installation >25' To 30' Above Floor, Add	*29.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*33.76*	
		For Elevated Installation >35' To 40' Above Floor, Add	*42.20*	
		For Elevated Installation >40' Above Floor, Add	*46.42*	
		For Work In Restricted Working Space, Add	*25.32*	
26 05 33 13-1129	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Hazardous Locations Pulling Elbow	587.61	48.89
		For Elevated Installation >10' To 15' Above Floor, Add	*9.78*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.56*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.45*	
		For Elevated Installation >25' To 30' Above Floor, Add	*34.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*39.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*48.90*	
		For Elevated Installation >40' Above Floor, Add	*53.79*	
		For Work In Restricted Working Space, Add	*29.34*	
26 05 33 13-1130	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Hazardous Locations Pulling Elbow	801.44	53.59
		For Elevated Installation >10' To 15' Above Floor, Add	*10.72*	
		For Elevated Installation >15' To 20' Above Floor, Add	*21.43*	
		For Elevated Installation >20' To 25' Above Floor, Add	*26.79*	
		For Elevated Installation >25' To 30' Above Floor, Add	*37.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*42.87*	
		For Elevated Installation >35' To 40' Above Floor, Add	*53.59*	
		For Elevated Installation >40' Above Floor, Add	*58.94*	
		For Work In Restricted Working Space, Add	*32.15*	
26 05 33 13-1131	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Hazardous Locations Pulling Elbow	855.81	64.31
		For Elevated Installation >10' To 15' Above Floor, Add	*12.86*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.72*	
		For Elevated Installation >20' To 25' Above Floor, Add	*32.15*	
		For Elevated Installation >25' To 30' Above Floor, Add	*45.01*	
		For Elevated Installation >30' To 35' Above Floor, Add	*51.44*	
		For Elevated Installation >35' To 40' Above Floor, Add	*64.31*	
		For Elevated Installation >40' Above Floor, Add	*70.74*	
		For Work In Restricted Working Space, Add	*38.58*	
26 05 33 13-1132	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Hazardous Locations Pulling Elbow	1,641.05	90.43
		For Elevated Installation >10' To 15' Above Floor, Add	*18.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.17*	
		For Elevated Installation >20' To 25' Above Floor, Add	*45.21*	
		For Elevated Installation >25' To 30' Above Floor, Add	*63.30*	
		For Elevated Installation >30' To 35' Above Floor, Add	*72.34*	
		For Elevated Installation >35' To 40' Above Floor, Add	*90.43*	
		For Elevated Installation >40' Above Floor, Add	*99.47*	
		For Work In Restricted Working Space, Add	*54.26*	
26 05 33 13-1133	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Hazardous Locations Pulling Elbow	1,730.20	120.57
		For Elevated Installation >10' To 15' Above Floor, Add	*24.11*	
		For Elevated Installation >15' To 20' Above Floor, Add	*48.23*	
		For Elevated Installation >20' To 25' Above Floor, Add	*60.29*	
		For Elevated Installation >25' To 30' Above Floor, Add	*84.40*	
		For Elevated Installation >30' To 35' Above Floor, Add	*96.46*	
		For Elevated Installation >35' To 40' Above Floor, Add	*120.57*	
		For Elevated Installation >40' Above Floor, Add	*132.63*	
		For Work In Restricted Working Space, Add	*72.34*	
26 05 33 13-1134	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Hazardous Locations Pulling Elbow	2,531.24	150.71
		For Elevated Installation >10' To 15' Above Floor, Add	*30.14*	
		For Elevated Installation >15' To 20' Above Floor, Add	*60.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*75.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*105.50*	
		For Elevated Installation >30' To 35' Above Floor, Add	*120.57*	
		For Elevated Installation >35' To 40' Above Floor, Add	*150.71*	
		For Elevated Installation >40' Above Floor, Add	*165.78*	
		For Work In Restricted Working Space, Add	*90.43*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1135	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Hazardous Locations Pulling Elbow	2,867.95	183.53
		For Elevated Installation >10' To 15' Above Floor, Add	*36.71*	
		For Elevated Installation >15' To 20' Above Floor, Add	*73.41*	
		For Elevated Installation >20' To 25' Above Floor, Add	*91.77*	
		For Elevated Installation >25' To 30' Above Floor, Add	*128.47*	
		For Elevated Installation >30' To 35' Above Floor, Add	*146.83*	
		For Elevated Installation >35' To 40' Above Floor, Add	*183.54*	
		For Elevated Installation >40' Above Floor, Add	*201.89*	
		For Work In Restricted Working Space, Add	*110.12*	

26 05 33 13-1136 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Male To Male 90 Degree Malleable Elbows *(26 05 33 13-0848)*

26 05 33 13-1137	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Male To Male 90 Degree Malleable Elbow	96.78	16.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Work In Restricted Working Space, Add	*10.05*	
26 05 33 13-1138	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Male To Male 90 Degree Malleable Elbow	112.79	20.77
		For Elevated Installation >10' To 15' Above Floor, Add	*4.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.31*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.77*	
		For Elevated Installation >40' Above Floor, Add	*22.84*	
		For Work In Restricted Working Space, Add	*12.46*	
26 05 33 13-1139	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Male To Male 90 Degree Malleable Elbow	134.47	25.45
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
		For Work In Restricted Working Space, Add	*15.27*	
26 05 33 13-1140	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Male To Male 90 Degree Malleable Elbow	158.65	29.47
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
		For Work In Restricted Working Space, Add	*17.68*	

26 05 33 13-1141 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Female To Female 90 Degree Malleable Elbows *(26 05 33 13-0848)*

26 05 33 13-1142	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Female To Female 90 Degree Malleable Elbow	76.59	16.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Work In Restricted Working Space, Add	*10.05*	
26 05 33 13-1143	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Female To Female 90 Degree Malleable Elbow	88.55	20.77
		For Elevated Installation >10' To 15' Above Floor, Add	*4.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.31*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.77*	
		For Elevated Installation >40' Above Floor, Add	*22.84*	
		For Work In Restricted Working Space, Add	*12.46*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1144	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Female To Female 90 Degree Malleable Elbow	122.66	25.45
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
		For Work In Restricted Working Space, Add	*15.27*	
26 05 33 13-1145	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Female To Female 90 Degree Malleable Elbow	158.74	29.47
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
		For Work In Restricted Working Space, Add	*17.68*	
26 05 33 13-1146	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Female To Female 90 Degree Malleable Elbow	193.19	33.49
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	
		For Work In Restricted Working Space, Add	*20.09*	
26 05 33 13-1147	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Female To Female 90 Degree Malleable Elbow	276.61	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
26 05 33 13-1148	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Female To Female 90 Degree Malleable Elbow	377.58	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	

26 05 33 13-1149 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Male To Female 90 Degree Malleable Elbows *(26 05 33 13-0848)*

26 05 33 13-1150	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Male To Female 90 Degree Malleable Elbow	96.83	16.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Work In Restricted Working Space, Add	*10.05*	
26 05 33 13-1151	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Male To Female 90 Degree Malleable Elbow	115.59	20.77
		For Elevated Installation >10' To 15' Above Floor, Add	*4.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.31*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.77*	
		For Elevated Installation >40' Above Floor, Add	*22.84*	
		For Work In Restricted Working Space, Add	*12.46*	
26 05 33 13-1152	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Male To Female 90 Degree Malleable Elbow	134.49	25.45
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
		For Work In Restricted Working Space, Add	*15.27*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1153	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Male To Female 90 Degree Malleable Elbow	158.70	29.47
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
		For Work In Restricted Working Space, Add	*17.68*	

26 05 33 13-1154 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Female To Female 45 Degree Malleable Elbows *(26 05 33 13-0848)*

26 05 33 13-1155	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Female To Female 45 Degree Malleable Elbow	76.66	16.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Work In Restricted Working Space, Add	*10.05*	
26 05 33 13-1156	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Female To Female 45 Degree Malleable Elbow	88.55	20.77
		For Elevated Installation >10' To 15' Above Floor, Add	*4.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.31*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.77*	
		For Elevated Installation >40' Above Floor, Add	*22.84*	
		For Work In Restricted Working Space, Add	*12.46*	
26 05 33 13-1157	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Female To Female 45 Degree Malleable Elbow	114.29	25.45
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
		For Work In Restricted Working Space, Add	*15.27*	
26 05 33 13-1158	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Female To Female 45 Degree Malleable Elbow	142.50	29.47
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
		For Work In Restricted Working Space, Add	*17.68*	
26 05 33 13-1159	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Female To Female 45 Degree Malleable Elbow	166.74	33.49
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	
		For Work In Restricted Working Space, Add	*20.09*	
26 05 33 13-1160	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Female To Female 45 Degree Malleable Elbow	191.88	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
26 05 33 13-1161	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Female To Female 45 Degree Malleable Elbow	355.97	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1162	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Female To Female 45 Degree Malleable Elbow	409.05	62.96
		For Elevated Installation >10' To 15' Above Floor, Add	*12.59*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.48*	
		For Elevated Installation >25' To 30' Above Floor, Add	*44.08*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.37*	
		For Elevated Installation >35' To 40' Above Floor, Add	*62.97*	
		For Elevated Installation >40' Above Floor, Add	*69.26*	
		For Work In Restricted Working Space, Add	*37.78*	
26 05 33 13-1163	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Female To Female 45 Degree Malleable Elbow	441.65	71.00
		For Elevated Installation >10' To 15' Above Floor, Add	*14.20*	
		For Elevated Installation >15' To 20' Above Floor, Add	*28.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*35.50*	
		For Elevated Installation >25' To 30' Above Floor, Add	*49.70*	
		For Elevated Installation >30' To 35' Above Floor, Add	*56.80*	
		For Elevated Installation >35' To 40' Above Floor, Add	*71.01*	
		For Elevated Installation >40' Above Floor, Add	*78.11*	
		For Work In Restricted Working Space, Add	*42.60*	
26 05 33 13-1164	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Female To Female 45 Degree Malleable Elbow	545.38	92.43
		For Elevated Installation >10' To 15' Above Floor, Add	*18.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*73.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.44*	
		For Elevated Installation >40' Above Floor, Add	*101.68*	
		For Work In Restricted Working Space, Add	*55.46*	

26 05 33 13-1165 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Service Entrance Elbows *(26 05 33 13-0848)*

26 05 33 13-1166	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Service Entrance Elbow	160.16	32.15
		For Elevated Installation >10' To 15' Above Floor, Add	*6.43*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.86*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.08*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.72*	
		For Elevated Installation >35' To 40' Above Floor, Add	*32.16*	
		For Elevated Installation >40' Above Floor, Add	*35.37*	
		For Work In Restricted Working Space, Add	*19.29*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*19.29*	
26 05 33 13-1167	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Service Entrance Elbow	173.30	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*22.10*	
26 05 33 13-1168	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Service Entrance Elbow	189.91	42.20
		For Elevated Installation >10' To 15' Above Floor, Add	*8.44*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.88*	
		For Elevated Installation >20' To 25' Above Floor, Add	*21.10*	
		For Elevated Installation >25' To 30' Above Floor, Add	*29.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*33.76*	
		For Elevated Installation >35' To 40' Above Floor, Add	*42.20*	
		For Elevated Installation >40' Above Floor, Add	*46.42*	
		For Work In Restricted Working Space, Add	*25.32*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*25.32*	
26 05 33 13-1169	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Service Entrance Elbow	254.24	48.89
		For Elevated Installation >10' To 15' Above Floor, Add	*9.78*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.56*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.45*	
		For Elevated Installation >25' To 30' Above Floor, Add	*34.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*39.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*48.90*	
		For Elevated Installation >40' Above Floor, Add	*53.79*	
		For Work In Restricted Working Space, Add	*29.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*29.34*	
26 05 33 13-1170	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Service Entrance Elbow	322.56	53.59
		For Elevated Installation >10' To 15' Above Floor, Add	*10.72*	
		For Elevated Installation >15' To 20' Above Floor, Add	*21.43*	
		For Elevated Installation >20' To 25' Above Floor, Add	*26.79*	
		For Elevated Installation >25' To 30' Above Floor, Add	*37.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*42.87*	
		For Elevated Installation >35' To 40' Above Floor, Add	*53.59*	
		For Elevated Installation >40' Above Floor, Add	*58.94*	
		For Work In Restricted Working Space, Add	*32.15*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*32.15*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1171		**Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) GUAB, GUAC, GUAL, GUAN Junction Boxes With Cast Iron Cover** *(26 05 33 13-0848)*		
26 05 33 13-1172	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) GUAB, GUAC, GUAL, GUAN Junction Box With Cast Iron Cover	192.16	32.15
		For Elevated Installation >10' To 15' Above Floor, Add	*6.43*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.86*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.08*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.72*	
		For Elevated Installation >35' To 40' Above Floor, Add	*32.16*	
		For Elevated Installation >40' Above Floor, Add	*35.37*	
		For Work In Restricted Working Space, Add	*19.29*	
26 05 33 13-1173	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) GUAB, GUAC, GUAL, GUAN Junction Box With Cast Iron Cover	207.27	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
26 05 33 13-1174	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) GUAB, GUAC, GUAL, GUAN Junction Box With Cast Iron Cover	242.18	42.20
		For Elevated Installation >10' To 15' Above Floor, Add	*8.44*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.88*	
		For Elevated Installation >20' To 25' Above Floor, Add	*21.10*	
		For Elevated Installation >25' To 30' Above Floor, Add	*29.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*33.76*	
		For Elevated Installation >35' To 40' Above Floor, Add	*42.20*	
		For Elevated Installation >40' Above Floor, Add	*46.42*	
		For Work In Restricted Working Space, Add	*25.32*	
26 05 33 13-1175	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) GUAB, GUAC, GUAL, GUAN Junction Box With Cast Iron Cover	344.96	48.89
		For Elevated Installation >10' To 15' Above Floor, Add	*9.78*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.56*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.45*	
		For Elevated Installation >25' To 30' Above Floor, Add	*34.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*39.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*48.90*	
		For Elevated Installation >40' Above Floor, Add	*53.79*	
		For Work In Restricted Working Space, Add	*29.34*	
26 05 33 13-1176	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) GUAB, GUAC, GUAL, GUAN Junction Box With Cast Iron Cover	557.63	53.59
		For Elevated Installation >10' To 15' Above Floor, Add	*10.72*	
		For Elevated Installation >15' To 20' Above Floor, Add	*21.43*	
		For Elevated Installation >20' To 25' Above Floor, Add	*26.79*	
		For Elevated Installation >25' To 30' Above Floor, Add	*37.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*42.87*	
		For Elevated Installation >35' To 40' Above Floor, Add	*53.59*	
		For Elevated Installation >40' Above Floor, Add	*58.94*	
		For Work In Restricted Working Space, Add	*32.15*	
26 05 33 13-1177	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) GUAB, GUAC, GUAL, GUAN Junction Box With Cast Iron Cover	603.22	64.31
		For Elevated Installation >10' To 15' Above Floor, Add	*12.86*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.72*	
		For Elevated Installation >20' To 25' Above Floor, Add	*32.15*	
		For Elevated Installation >25' To 30' Above Floor, Add	*45.01*	
		For Elevated Installation >30' To 35' Above Floor, Add	*51.44*	
		For Elevated Installation >35' To 40' Above Floor, Add	*64.31*	
		For Elevated Installation >40' Above Floor, Add	*70.74*	
		For Work In Restricted Working Space, Add	*38.58*	
26 05 33 13-1178		**Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) GUAT Junction Boxes With Cast Iron Cover** *(26 05 33 13-0848)*		
26 05 33 13-1179	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) GUAT Junction Box With Cast Iron Cover	210.33	32.15
		For Elevated Installation >10' To 15' Above Floor, Add	*6.43*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.86*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.08*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.72*	
		For Elevated Installation >35' To 40' Above Floor, Add	*32.16*	
		For Elevated Installation >40' Above Floor, Add	*35.37*	
		For Work In Restricted Working Space, Add	*19.29*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1180	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) GUAT Junction Box With Cast Iron Cover	237.56	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
26 05 33 13-1181	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) GUAT Junction Box With Cast Iron Cover	259.46	42.20
		For Elevated Installation >10' To 15' Above Floor, Add	*8.44*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.88*	
		For Elevated Installation >20' To 25' Above Floor, Add	*21.10*	
		For Elevated Installation >25' To 30' Above Floor, Add	*29.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*33.76*	
		For Elevated Installation >35' To 40' Above Floor, Add	*42.20*	
		For Elevated Installation >40' Above Floor, Add	*46.42*	
		For Work In Restricted Working Space, Add	*25.32*	
26 05 33 13-1182	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) GUAT Junction Box With Cast Iron Cover	362.52	48.89
		For Elevated Installation >10' To 15' Above Floor, Add	*9.78*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.56*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.45*	
		For Elevated Installation >25' To 30' Above Floor, Add	*34.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*39.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*48.90*	
		For Elevated Installation >40' Above Floor, Add	*53.79*	
		For Work In Restricted Working Space, Add	*29.34*	
26 05 33 13-1183	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) GUAT Junction Box With Cast Iron Cover	599.53	53.59
		For Elevated Installation >10' To 15' Above Floor, Add	*10.72*	
		For Elevated Installation >15' To 20' Above Floor, Add	*21.43*	
		For Elevated Installation >20' To 25' Above Floor, Add	*26.79*	
		For Elevated Installation >25' To 30' Above Floor, Add	*37.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*42.87*	
		For Elevated Installation >35' To 40' Above Floor, Add	*53.59*	
		For Elevated Installation >40' Above Floor, Add	*58.94*	
		For Work In Restricted Working Space, Add	*32.15*	
26 05 33 13-1184	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) GUAT Junction Box With Cast Iron Cover	641.67	64.31
		For Elevated Installation >10' To 15' Above Floor, Add	*12.86*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.72*	
		For Elevated Installation >20' To 25' Above Floor, Add	*32.15*	
		For Elevated Installation >25' To 30' Above Floor, Add	*45.01*	
		For Elevated Installation >30' To 35' Above Floor, Add	*51.44*	
		For Elevated Installation >35' To 40' Above Floor, Add	*64.31*	
		For Elevated Installation >40' Above Floor, Add	*70.74*	
		For Work In Restricted Working Space, Add	*38.58*	

26 05 33 13-1185 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) GUAW, GUAX Junction Boxes With Cast Iron Cover *(26 05 33 13-0848)*

26 05 33 13-1186	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) GUAW, GUAX Junction Box With Cast Iron Cover	210.47	32.15
		For Elevated Installation >10' To 15' Above Floor, Add	*6.43*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.86*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.08*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.72*	
		For Elevated Installation >35' To 40' Above Floor, Add	*32.16*	
		For Elevated Installation >40' Above Floor, Add	*35.37*	
		For Work In Restricted Working Space, Add	*19.29*	
26 05 33 13-1187	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) GUAW, GUAX Junction Box With Cast Iron Cover	232.20	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
26 05 33 13-1188	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) GUAW, GUAX Junction Box With Cast Iron Cover	276.15	42.20
		For Elevated Installation >10' To 15' Above Floor, Add	*8.44*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.88*	
		For Elevated Installation >20' To 25' Above Floor, Add	*21.10*	
		For Elevated Installation >25' To 30' Above Floor, Add	*29.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*33.76*	
		For Elevated Installation >35' To 40' Above Floor, Add	*42.20*	
		For Elevated Installation >40' Above Floor, Add	*46.42*	
		For Work In Restricted Working Space, Add	*25.32*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1189	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) GUAW, GUAX Junction Box With Cast Iron Cover	375.90	48.89
		For Elevated Installation >10' To 15' Above Floor, Add	*9.78*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.56*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.45*	
		For Elevated Installation >25' To 30' Above Floor, Add	*34.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*39.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*48.90*	
		For Elevated Installation >40' Above Floor, Add	*53.79*	
		For Work In Restricted Working Space, Add	*29.34*	
26 05 33 13-1190	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) GUAW, GUAX Junction Box With Cast Iron Cover	619.49	53.59
		For Elevated Installation >10' To 15' Above Floor, Add	*10.72*	
		For Elevated Installation >15' To 20' Above Floor, Add	*21.43*	
		For Elevated Installation >20' To 25' Above Floor, Add	*26.79*	
		For Elevated Installation >25' To 30' Above Floor, Add	*37.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*42.87*	
		For Elevated Installation >35' To 40' Above Floor, Add	*53.59*	
		For Elevated Installation >40' Above Floor, Add	*58.94*	
		For Work In Restricted Working Space, Add	*32.15*	
26 05 33 13-1191	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) GUAW, GUAX Junction Box With Cast Iron Cover	666.28	64.31
		For Elevated Installation >10' To 15' Above Floor, Add	*12.86*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.72*	
		For Elevated Installation >20' To 25' Above Floor, Add	*32.15*	
		For Elevated Installation >25' To 30' Above Floor, Add	*45.01*	
		For Elevated Installation >30' To 35' Above Floor, Add	*51.44*	
		For Elevated Installation >35' To 40' Above Floor, Add	*64.31*	
		For Elevated Installation >40' Above Floor, Add	*70.74*	
		For Work In Restricted Working Space, Add	*38.58*	

26 05 33 13-1192 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) GUAD Junction Boxes With Cast Iron Cover *(26 05 33 13-0848)*

26 05 33 13-1193	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) GUAD Junction Box With Cast Iron Cover	260.75	32.15
		For Elevated Installation >10' To 15' Above Floor, Add	*6.43*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.86*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.08*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.72*	
		For Elevated Installation >35' To 40' Above Floor, Add	*32.16*	
		For Elevated Installation >40' Above Floor, Add	*35.37*	
		For Work In Restricted Working Space, Add	*19.29*	
26 05 33 13-1194	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) GUAD Junction Box With Cast Iron Cover	288.10	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
26 05 33 13-1195	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) GUAD Junction Box With Cast Iron Cover	312.50	42.20
		For Elevated Installation >10' To 15' Above Floor, Add	*8.44*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.88*	
		For Elevated Installation >20' To 25' Above Floor, Add	*21.10*	
		For Elevated Installation >25' To 30' Above Floor, Add	*29.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*33.76*	
		For Elevated Installation >35' To 40' Above Floor, Add	*42.20*	
		For Elevated Installation >40' Above Floor, Add	*46.42*	
		For Work In Restricted Working Space, Add	*25.32*	
26 05 33 13-1196	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) GUAD Junction Box With Cast Iron Cover	782.27	48.89
		For Elevated Installation >10' To 15' Above Floor, Add	*9.78*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.56*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.45*	
		For Elevated Installation >25' To 30' Above Floor, Add	*34.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*39.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*48.90*	
		For Elevated Installation >40' Above Floor, Add	*53.79*	
		For Work In Restricted Working Space, Add	*29.34*	

26 05 33 13-1197 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) FS Series Junction Boxes *(26 05 33 13-0848)*

Note: Excludes cover.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1198	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) FS Series Junction Box	126.68	32.15
		For Elevated Installation >10' To 15' Above Floor, Add	*6.43*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.86*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.08*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.72*	
		For Elevated Installation >35' To 40' Above Floor, Add	*32.16*	
		For Elevated Installation >40' Above Floor, Add	*35.37*	
		For Work In Restricted Working Space, Add	*19.29*	
26 05 33 13-1199	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) FS Series Junction Box	139.42	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
26 05 33 13-1200	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) FS Series Junction Box	155.78	42.20
		For Elevated Installation >10' To 15' Above Floor, Add	*8.44*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.88*	
		For Elevated Installation >20' To 25' Above Floor, Add	*21.10*	
		For Elevated Installation >25' To 30' Above Floor, Add	*29.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*33.76*	
		For Elevated Installation >35' To 40' Above Floor, Add	*42.20*	
		For Elevated Installation >40' Above Floor, Add	*46.42*	
		For Work In Restricted Working Space, Add	*25.32*	
26 05 33 13-1201	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) FS Series Junction Box	140.31	32.15
		For Elevated Installation >10' To 15' Above Floor, Add	*6.43*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.86*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.08*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.72*	
		For Elevated Installation >35' To 40' Above Floor, Add	*32.16*	
		For Elevated Installation >40' Above Floor, Add	*35.37*	
		For Work In Restricted Working Space, Add	*19.29*	
26 05 33 13-1202	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) FS Series Junction Box	151.34	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
26 05 33 13-1203	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) FS Series Junction Box	172.35	42.20
		For Elevated Installation >10' To 15' Above Floor, Add	*8.44*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.88*	
		For Elevated Installation >20' To 25' Above Floor, Add	*21.10*	
		For Elevated Installation >25' To 30' Above Floor, Add	*29.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*33.76*	
		For Elevated Installation >35' To 40' Above Floor, Add	*42.20*	
		For Elevated Installation >40' Above Floor, Add	*46.42*	
		For Work In Restricted Working Space, Add	*25.32*	

26 05 33 13-1204 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) FD Series Junction Boxes *(26 05 33 13-0848)*

Note: Excludes cover.

26 05 33 13-1205	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) FD Series Junction Box	133.12	32.15
		For Elevated Installation >10' To 15' Above Floor, Add	*6.43*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.86*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.08*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.72*	
		For Elevated Installation >35' To 40' Above Floor, Add	*32.16*	
		For Elevated Installation >40' Above Floor, Add	*35.37*	
		For Work In Restricted Working Space, Add	*19.29*	
26 05 33 13-1206	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) FD Series Junction Box	146.68	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
26 05 33 13-1207	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) FD Series Junction Box	160.79	42.20
		For Elevated Installation >10' To 15' Above Floor, Add	*8.44*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.88*	
		For Elevated Installation >20' To 25' Above Floor, Add	*21.10*	
		For Elevated Installation >25' To 30' Above Floor, Add	*29.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*33.76*	
		For Elevated Installation >35' To 40' Above Floor, Add	*42.20*	
		For Elevated Installation >40' Above Floor, Add	*46.42*	
		For Work In Restricted Working Space, Add	*25.32*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1208	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) FD Series Junction Box	149.53	32.15
		For Elevated Installation >10' To 15' Above Floor, Add	*6.43*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.86*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.08*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.72*	
		For Elevated Installation >35' To 40' Above Floor, Add	*32.16*	
		For Elevated Installation >40' Above Floor, Add	*35.37*	
		For Work In Restricted Working Space, Add	*19.29*	
26 05 33 13-1209	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) FD Series Junction Box	163.25	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
26 05 33 13-1210	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) FD Series Junction Box	184.60	42.20
		For Elevated Installation >10' To 15' Above Floor, Add	*8.44*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.88*	
		For Elevated Installation >20' To 25' Above Floor, Add	*21.10*	
		For Elevated Installation >25' To 30' Above Floor, Add	*29.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*33.76*	
		For Elevated Installation >35' To 40' Above Floor, Add	*42.20*	
		For Elevated Installation >40' Above Floor, Add	*46.42*	
		For Work In Restricted Working Space, Add	*25.32*	

26 05 33 13-1211 Polyvinyl Chloride (PVC) Coated, Urethane Lined, FS And FD Series Covers *(26 05 33 13-0848)*

26 05 33 13-1212	EA	Polyvinyl Chloride (PVC) Coated, Urethane Lined, DS23, FS And FD Series Cover	46.63	4.02
		For Elevated Installation >10' To 15' Above Floor, Add	*0.80*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.61*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.01*	
		For Elevated Installation >25' To 30' Above Floor, Add	*2.81*	
		For Elevated Installation >30' To 35' Above Floor, Add	*3.22*	
		For Elevated Installation >35' To 40' Above Floor, Add	*4.02*	
		For Elevated Installation >40' Above Floor, Add	*4.42*	
		For Work In Restricted Working Space, Add	*2.41*	
26 05 33 13-1213	EA	Polyvinyl Chloride (PVC) Coated, Urethane Lined, DS21G, FS And FD Series Cover	63.36	4.69
		For Elevated Installation >10' To 15' Above Floor, Add	*0.94*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.88*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.35*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.28*	
		For Elevated Installation >30' To 35' Above Floor, Add	*3.75*	
		For Elevated Installation >35' To 40' Above Floor, Add	*4.69*	
		For Elevated Installation >40' Above Floor, Add	*5.16*	
		For Work In Restricted Working Space, Add	*2.81*	
26 05 33 13-1214	EA	Polyvinyl Chloride (PVC) Coated, Urethane Lined, DS32G, FS And FD Series Cover	59.82	4.69
		For Elevated Installation >10' To 15' Above Floor, Add	*0.94*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.88*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.35*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.28*	
		For Elevated Installation >30' To 35' Above Floor, Add	*3.75*	
		For Elevated Installation >35' To 40' Above Floor, Add	*4.69*	
		For Elevated Installation >40' Above Floor, Add	*5.16*	
		For Work In Restricted Working Space, Add	*2.81*	
26 05 33 13-1215	EA	Polyvinyl Chloride (PVC) Coated, Urethane Lined, DS100G, FS And FD Series Cover	53.22	4.69
		For Elevated Installation >10' To 15' Above Floor, Add	*0.94*	
		For Elevated Installation >15' To 20' Above Floor, Add	*1.88*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.35*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.28*	
		For Elevated Installation >30' To 35' Above Floor, Add	*3.75*	
		For Elevated Installation >35' To 40' Above Floor, Add	*4.69*	
		For Elevated Installation >40' Above Floor, Add	*5.16*	
		For Work In Restricted Working Space, Add	*2.81*	
26 05 33 13-1216	EA	Polyvinyl Chloride (PVC) Coated, Urethane Lined, WLRD1, FS And FD Series Cover	258.34	6.70
		For Elevated Installation >10' To 15' Above Floor, Add	*1.34*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.68*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.35*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.69*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.70*	
		For Elevated Installation >40' Above Floor, Add	*7.37*	
		For Work In Restricted Working Space, Add	*4.02*	
26 05 33 13-1217	EA	Polyvinyl Chloride (PVC) Coated, Urethane Lined, WLRS1, FS And FD Series Cover	229.69	6.70
		For Elevated Installation >10' To 15' Above Floor, Add	*1.34*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.68*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.35*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.69*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.70*	
		For Elevated Installation >40' Above Floor, Add	*7.37*	
		For Work In Restricted Working Space, Add	*4.02*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1218		Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Mogul Conduit Bodies *(26 05 33 13-0848)*			
		Note: Includes covers.			
26 05 33 13-1219	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BC Mogul Conduit Body		272.45	42.20
		For Elevated Installation >10' To 15' Above Floor, Add		*8.44*	
		For Elevated Installation >15' To 20' Above Floor, Add		*16.88*	
		For Elevated Installation >20' To 25' Above Floor, Add		*21.10*	
		For Elevated Installation >25' To 30' Above Floor, Add		*29.54*	
		For Elevated Installation >30' To 35' Above Floor, Add		*33.76*	
		For Elevated Installation >35' To 40' Above Floor, Add		*42.20*	
		For Elevated Installation >40' Above Floor, Add		*46.42*	
		For Work In Restricted Working Space, Add		*25.32*	
26 05 33 13-1220	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BC Mogul Conduit Body		306.14	48.89
		For Elevated Installation >10' To 15' Above Floor, Add		*9.78*	
		For Elevated Installation >15' To 20' Above Floor, Add		*19.56*	
		For Elevated Installation >20' To 25' Above Floor, Add		*24.45*	
		For Elevated Installation >25' To 30' Above Floor, Add		*34.23*	
		For Elevated Installation >30' To 35' Above Floor, Add		*39.12*	
		For Elevated Installation >35' To 40' Above Floor, Add		*48.90*	
		For Elevated Installation >40' Above Floor, Add		*53.79*	
		For Work In Restricted Working Space, Add		*29.34*	
26 05 33 13-1221	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BC Mogul Conduit Body		421.69	53.59
		For Elevated Installation >10' To 15' Above Floor, Add		*10.72*	
		For Elevated Installation >15' To 20' Above Floor, Add		*21.43*	
		For Elevated Installation >20' To 25' Above Floor, Add		*26.79*	
		For Elevated Installation >25' To 30' Above Floor, Add		*37.51*	
		For Elevated Installation >30' To 35' Above Floor, Add		*42.87*	
		For Elevated Installation >35' To 40' Above Floor, Add		*53.59*	
		For Elevated Installation >40' Above Floor, Add		*58.94*	
		For Work In Restricted Working Space, Add		*32.15*	
26 05 33 13-1222	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BC Mogul Conduit Body		502.52	64.31
		For Elevated Installation >10' To 15' Above Floor, Add		*12.86*	
		For Elevated Installation >15' To 20' Above Floor, Add		*25.72*	
		For Elevated Installation >20' To 25' Above Floor, Add		*32.15*	
		For Elevated Installation >25' To 30' Above Floor, Add		*45.01*	
		For Elevated Installation >30' To 35' Above Floor, Add		*51.44*	
		For Elevated Installation >35' To 40' Above Floor, Add		*64.31*	
		For Elevated Installation >40' Above Floor, Add		*70.74*	
		For Work In Restricted Working Space, Add		*38.58*	
26 05 33 13-1223	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BC Mogul Conduit Body		725.78	90.43
		For Elevated Installation >10' To 15' Above Floor, Add		*18.09*	
		For Elevated Installation >15' To 20' Above Floor, Add		*36.17*	
		For Elevated Installation >20' To 25' Above Floor, Add		*45.21*	
		For Elevated Installation >25' To 30' Above Floor, Add		*63.30*	
		For Elevated Installation >30' To 35' Above Floor, Add		*72.34*	
		For Elevated Installation >35' To 40' Above Floor, Add		*90.43*	
		For Elevated Installation >40' Above Floor, Add		*99.47*	
		For Work In Restricted Working Space, Add		*54.26*	
26 05 33 13-1224	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BC Mogul Conduit Body		916.25	120.57
		For Elevated Installation >10' To 15' Above Floor, Add		*24.11*	
		For Elevated Installation >15' To 20' Above Floor, Add		*48.23*	
		For Elevated Installation >20' To 25' Above Floor, Add		*60.29*	
		For Elevated Installation >25' To 30' Above Floor, Add		*84.40*	
		For Elevated Installation >30' To 35' Above Floor, Add		*96.46*	
		For Elevated Installation >35' To 40' Above Floor, Add		*120.57*	
		For Elevated Installation >40' Above Floor, Add		*132.63*	
		For Work In Restricted Working Space, Add		*72.34*	
26 05 33 13-1225	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BC Mogul Conduit Body		1,341.17	150.71
		For Elevated Installation >10' To 15' Above Floor, Add		*30.14*	
		For Elevated Installation >15' To 20' Above Floor, Add		*60.28*	
		For Elevated Installation >20' To 25' Above Floor, Add		*75.36*	
		For Elevated Installation >25' To 30' Above Floor, Add		*105.50*	
		For Elevated Installation >30' To 35' Above Floor, Add		*120.57*	
		For Elevated Installation >35' To 40' Above Floor, Add		*150.71*	
		For Elevated Installation >40' Above Floor, Add		*165.78*	
		For Work In Restricted Working Space, Add		*90.43*	
26 05 33 13-1226	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BC Mogul Conduit Body		1,663.90	183.53
		For Elevated Installation >10' To 15' Above Floor, Add		*36.71*	
		For Elevated Installation >15' To 20' Above Floor, Add		*73.41*	
		For Elevated Installation >20' To 25' Above Floor, Add		*91.77*	
		For Elevated Installation >25' To 30' Above Floor, Add		*128.47*	
		For Elevated Installation >30' To 35' Above Floor, Add		*146.83*	
		For Elevated Installation >35' To 40' Above Floor, Add		*183.54*	
		For Elevated Installation >40' Above Floor, Add		*201.89*	
		For Work In Restricted Working Space, Add		*110.12*	
26 05 33 13-1227	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BLB Mogul Conduit Body		272.45	42.20
		For Elevated Installation >10' To 15' Above Floor, Add		*8.44*	
		For Elevated Installation >15' To 20' Above Floor, Add		*16.88*	
		For Elevated Installation >20' To 25' Above Floor, Add		*21.10*	
		For Elevated Installation >25' To 30' Above Floor, Add		*29.54*	
		For Elevated Installation >30' To 35' Above Floor, Add		*33.76*	
		For Elevated Installation >35' To 40' Above Floor, Add		*42.20*	
		For Elevated Installation >40' Above Floor, Add		*46.42*	
		For Work In Restricted Working Space, Add		*25.32*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1228	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BLB Mogul Conduit Body	306.14	48.89
		For Elevated Installation >10' To 15' Above Floor, Add	*9.78*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.56*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.45*	
		For Elevated Installation >25' To 30' Above Floor, Add	*34.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*39.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*48.90*	
		For Elevated Installation >40' Above Floor, Add	*53.79*	
		For Work In Restricted Working Space, Add	*29.34*	
26 05 33 13-1229	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BLB Mogul Conduit Body	420.53	53.59
		For Elevated Installation >10' To 15' Above Floor, Add	*10.72*	
		For Elevated Installation >15' To 20' Above Floor, Add	*21.43*	
		For Elevated Installation >20' To 25' Above Floor, Add	*26.79*	
		For Elevated Installation >25' To 30' Above Floor, Add	*37.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*42.87*	
		For Elevated Installation >35' To 40' Above Floor, Add	*53.59*	
		For Elevated Installation >40' Above Floor, Add	*58.94*	
		For Work In Restricted Working Space, Add	*32.15*	
26 05 33 13-1230	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BLB Mogul Conduit Body	490.85	64.31
		For Elevated Installation >10' To 15' Above Floor, Add	*12.86*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.72*	
		For Elevated Installation >20' To 25' Above Floor, Add	*32.15*	
		For Elevated Installation >25' To 30' Above Floor, Add	*45.01*	
		For Elevated Installation >30' To 35' Above Floor, Add	*51.44*	
		For Elevated Installation >35' To 40' Above Floor, Add	*64.31*	
		For Elevated Installation >40' Above Floor, Add	*70.74*	
		For Work In Restricted Working Space, Add	*38.58*	
26 05 33 13-1231	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BLB Mogul Conduit Body	736.52	90.43
		For Elevated Installation >10' To 15' Above Floor, Add	*18.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.17*	
		For Elevated Installation >20' To 25' Above Floor, Add	*45.21*	
		For Elevated Installation >25' To 30' Above Floor, Add	*63.30*	
		For Elevated Installation >30' To 35' Above Floor, Add	*72.34*	
		For Elevated Installation >35' To 40' Above Floor, Add	*90.43*	
		For Elevated Installation >40' Above Floor, Add	*99.47*	
		For Work In Restricted Working Space, Add	*54.26*	
26 05 33 13-1232	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BLB Mogul Conduit Body	964.46	120.57
		For Elevated Installation >10' To 15' Above Floor, Add	*24.11*	
		For Elevated Installation >15' To 20' Above Floor, Add	*48.23*	
		For Elevated Installation >20' To 25' Above Floor, Add	*60.29*	
		For Elevated Installation >25' To 30' Above Floor, Add	*84.40*	
		For Elevated Installation >30' To 35' Above Floor, Add	*96.46*	
		For Elevated Installation >35' To 40' Above Floor, Add	*120.57*	
		For Elevated Installation >40' Above Floor, Add	*132.63*	
		For Work In Restricted Working Space, Add	*72.34*	
26 05 33 13-1233	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BLB Mogul Conduit Body	1,399.36	150.71
		For Elevated Installation >10' To 15' Above Floor, Add	*30.14*	
		For Elevated Installation >15' To 20' Above Floor, Add	*60.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*75.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*105.50*	
		For Elevated Installation >30' To 35' Above Floor, Add	*120.57*	
		For Elevated Installation >35' To 40' Above Floor, Add	*150.71*	
		For Elevated Installation >40' Above Floor, Add	*165.78*	
		For Work In Restricted Working Space, Add	*90.43*	
26 05 33 13-1234	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BLB Mogul Conduit Body	1,700.13	183.53
		For Elevated Installation >10' To 15' Above Floor, Add	*36.71*	
		For Elevated Installation >15' To 20' Above Floor, Add	*73.41*	
		For Elevated Installation >20' To 25' Above Floor, Add	*91.77*	
		For Elevated Installation >25' To 30' Above Floor, Add	*128.47*	
		For Elevated Installation >30' To 35' Above Floor, Add	*146.83*	
		For Elevated Installation >35' To 40' Above Floor, Add	*183.54*	
		For Elevated Installation >40' Above Floor, Add	*201.89*	
		For Work In Restricted Working Space, Add	*110.12*	
26 05 33 13-1235	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BT Mogul Conduit Body	272.45	42.20
		For Elevated Installation >10' To 15' Above Floor, Add	*8.44*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.88*	
		For Elevated Installation >20' To 25' Above Floor, Add	*21.10*	
		For Elevated Installation >25' To 30' Above Floor, Add	*29.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*33.76*	
		For Elevated Installation >35' To 40' Above Floor, Add	*42.20*	
		For Elevated Installation >40' Above Floor, Add	*46.42*	
		For Work In Restricted Working Space, Add	*25.32*	
26 05 33 13-1236	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BT Mogul Conduit Body	306.14	48.89
		For Elevated Installation >10' To 15' Above Floor, Add	*9.78*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.56*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.45*	
		For Elevated Installation >25' To 30' Above Floor, Add	*34.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*39.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*48.90*	
		For Elevated Installation >40' Above Floor, Add	*53.79*	
		For Work In Restricted Working Space, Add	*29.34*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1237	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BT Mogul Conduit Body	420.53	53.59
		For Elevated Installation >10' To 15' Above Floor, Add	*10.72*	
		For Elevated Installation >15' To 20' Above Floor, Add	*21.43*	
		For Elevated Installation >20' To 25' Above Floor, Add	*26.79*	
		For Elevated Installation >25' To 30' Above Floor, Add	*37.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*42.87*	
		For Elevated Installation >35' To 40' Above Floor, Add	*53.59*	
		For Elevated Installation >40' Above Floor, Add	*58.94*	
		For Work In Restricted Working Space, Add	*32.15*	
26 05 33 13-1238	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BT Mogul Conduit Body	490.85	64.31
		For Elevated Installation >10' To 15' Above Floor, Add	*12.86*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.72*	
		For Elevated Installation >20' To 25' Above Floor, Add	*32.15*	
		For Elevated Installation >25' To 30' Above Floor, Add	*45.01*	
		For Elevated Installation >30' To 35' Above Floor, Add	*51.44*	
		For Elevated Installation >35' To 40' Above Floor, Add	*64.31*	
		For Elevated Installation >40' Above Floor, Add	*70.74*	
		For Work In Restricted Working Space, Add	*38.58*	
26 05 33 13-1239	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BT Mogul Conduit Body	736.52	90.43
		For Elevated Installation >10' To 15' Above Floor, Add	*18.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.17*	
		For Elevated Installation >20' To 25' Above Floor, Add	*45.21*	
		For Elevated Installation >25' To 30' Above Floor, Add	*63.30*	
		For Elevated Installation >30' To 35' Above Floor, Add	*72.34*	
		For Elevated Installation >35' To 40' Above Floor, Add	*90.43*	
		For Elevated Installation >40' Above Floor, Add	*99.47*	
		For Work In Restricted Working Space, Add	*54.26*	
26 05 33 13-1240	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BT Mogul Conduit Body	964.46	120.57
		For Elevated Installation >10' To 15' Above Floor, Add	*24.11*	
		For Elevated Installation >15' To 20' Above Floor, Add	*48.23*	
		For Elevated Installation >20' To 25' Above Floor, Add	*60.29*	
		For Elevated Installation >25' To 30' Above Floor, Add	*84.40*	
		For Elevated Installation >30' To 35' Above Floor, Add	*96.46*	
		For Elevated Installation >35' To 40' Above Floor, Add	*120.57*	
		For Elevated Installation >40' Above Floor, Add	*132.63*	
		For Work In Restricted Working Space, Add	*72.34*	
26 05 33 13-1241	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BT Mogul Conduit Body	1,399.36	150.71
		For Elevated Installation >10' To 15' Above Floor, Add	*30.14*	
		For Elevated Installation >15' To 20' Above Floor, Add	*60.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*75.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*105.50*	
		For Elevated Installation >30' To 35' Above Floor, Add	*120.57*	
		For Elevated Installation >35' To 40' Above Floor, Add	*150.71*	
		For Elevated Installation >40' Above Floor, Add	*165.78*	
		For Work In Restricted Working Space, Add	*90.43*	
26 05 33 13-1242	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BT Mogul Conduit Body	1,700.13	183.53
		For Elevated Installation >10' To 15' Above Floor, Add	*36.71*	
		For Elevated Installation >15' To 20' Above Floor, Add	*73.41*	
		For Elevated Installation >20' To 25' Above Floor, Add	*91.77*	
		For Elevated Installation >25' To 30' Above Floor, Add	*128.47*	
		For Elevated Installation >30' To 35' Above Floor, Add	*146.83*	
		For Elevated Installation >35' To 40' Above Floor, Add	*183.54*	
		For Elevated Installation >40' Above Floor, Add	*201.89*	
		For Work In Restricted Working Space, Add	*110.12*	
26 05 33 13-1243	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BUB Mogul Conduit Body	272.45	42.20
		For Elevated Installation >10' To 15' Above Floor, Add	*8.44*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.88*	
		For Elevated Installation >20' To 25' Above Floor, Add	*21.10*	
		For Elevated Installation >25' To 30' Above Floor, Add	*29.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*33.76*	
		For Elevated Installation >35' To 40' Above Floor, Add	*42.20*	
		For Elevated Installation >40' Above Floor, Add	*46.42*	
		For Work In Restricted Working Space, Add	*25.32*	
26 05 33 13-1244	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BUB Mogul Conduit Body	306.14	48.89
		For Elevated Installation >10' To 15' Above Floor, Add	*9.78*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.56*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.45*	
		For Elevated Installation >25' To 30' Above Floor, Add	*34.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*39.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*48.90*	
		For Elevated Installation >40' Above Floor, Add	*53.79*	
		For Work In Restricted Working Space, Add	*29.34*	
26 05 33 13-1245	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BUB Mogul Conduit Body	421.69	53.59
		For Elevated Installation >10' To 15' Above Floor, Add	*10.72*	
		For Elevated Installation >15' To 20' Above Floor, Add	*21.43*	
		For Elevated Installation >20' To 25' Above Floor, Add	*26.79*	
		For Elevated Installation >25' To 30' Above Floor, Add	*37.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*42.87*	
		For Elevated Installation >35' To 40' Above Floor, Add	*53.59*	
		For Elevated Installation >40' Above Floor, Add	*58.94*	
		For Work In Restricted Working Space, Add	*32.15*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1246	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BUB Mogul Conduit Body	497.13	64.31
		For Elevated Installation >10' To 15' Above Floor, Add	*12.86*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.72*	
		For Elevated Installation >20' To 25' Above Floor, Add	*32.15*	
		For Elevated Installation >25' To 30' Above Floor, Add	*45.01*	
		For Elevated Installation >30' To 35' Above Floor, Add	*51.44*	
		For Elevated Installation >35' To 40' Above Floor, Add	*64.31*	
		For Elevated Installation >40' Above Floor, Add	*70.74*	
		For Work In Restricted Working Space, Add	*38.58*	
26 05 33 13-1247	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BUB Mogul Conduit Body	725.78	90.43
		For Elevated Installation >10' To 15' Above Floor, Add	*18.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.17*	
		For Elevated Installation >20' To 25' Above Floor, Add	*45.21*	
		For Elevated Installation >25' To 30' Above Floor, Add	*63.30*	
		For Elevated Installation >30' To 35' Above Floor, Add	*72.34*	
		For Elevated Installation >35' To 40' Above Floor, Add	*90.43*	
		For Elevated Installation >40' Above Floor, Add	*99.47*	
		For Work In Restricted Working Space, Add	*54.26*	
26 05 33 13-1248	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BUB Mogul Conduit Body	916.25	120.57
		For Elevated Installation >10' To 15' Above Floor, Add	*24.11*	
		For Elevated Installation >15' To 20' Above Floor, Add	*48.23*	
		For Elevated Installation >20' To 25' Above Floor, Add	*60.29*	
		For Elevated Installation >25' To 30' Above Floor, Add	*84.40*	
		For Elevated Installation >30' To 35' Above Floor, Add	*96.46*	
		For Elevated Installation >35' To 40' Above Floor, Add	*120.57*	
		For Elevated Installation >40' Above Floor, Add	*132.63*	
		For Work In Restricted Working Space, Add	*72.34*	
26 05 33 13-1249	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BUB Mogul Conduit Body	1,341.17	150.71
		For Elevated Installation >10' To 15' Above Floor, Add	*30.14*	
		For Elevated Installation >15' To 20' Above Floor, Add	*60.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*75.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*105.50*	
		For Elevated Installation >30' To 35' Above Floor, Add	*120.57*	
		For Elevated Installation >35' To 40' Above Floor, Add	*150.71*	
		For Elevated Installation >40' Above Floor, Add	*165.78*	
		For Work In Restricted Working Space, Add	*90.43*	
26 05 33 13-1250	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) BUB Mogul Conduit Body	1,678.99	183.53
		For Elevated Installation >10' To 15' Above Floor, Add	*36.71*	
		For Elevated Installation >15' To 20' Above Floor, Add	*73.41*	
		For Elevated Installation >20' To 25' Above Floor, Add	*91.77*	
		For Elevated Installation >25' To 30' Above Floor, Add	*128.47*	
		For Elevated Installation >30' To 35' Above Floor, Add	*146.83*	
		For Elevated Installation >35' To 40' Above Floor, Add	*183.54*	
		For Elevated Installation >40' Above Floor, Add	*201.89*	
		For Work In Restricted Working Space, Add	*110.12*	

26 05 33 13-1251 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Replacement Rigid Galvanized Steel (RGS) Mogul Covers *(26 05 33 13-0848)*

26 05 33 13-1252	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Replacement Rigid Galvanized Steel (RGS) Mogul Cover	134.57	6.03
		For Elevated Installation >10' To 15' Above Floor, Add	*1.21*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.41*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.01*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.22*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.82*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.03*	
		For Elevated Installation >40' Above Floor, Add	*6.63*	
		For Work In Restricted Working Space, Add	*3.62*	
26 05 33 13-1253	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Replacement Rigid Galvanized Steel (RGS) Mogul Cover	135.92	6.70
		For Elevated Installation >10' To 15' Above Floor, Add	*1.34*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.68*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.35*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.69*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.70*	
		For Elevated Installation >40' Above Floor, Add	*7.37*	
		For Work In Restricted Working Space, Add	*4.02*	
26 05 33 13-1254	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Replacement Rigid Galvanized Steel (RGS) Mogul Cover	192.13	9.38
		For Elevated Installation >10' To 15' Above Floor, Add	*1.88*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.75*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.69*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.56*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.50*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.38*	
		For Elevated Installation >40' Above Floor, Add	*10.31*	
		For Work In Restricted Working Space, Add	*5.63*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1255	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Replacement Rigid Galvanized Steel (RGS) Mogul Cover	194.82	10.72
		For Elevated Installation >10' To 15' Above Floor, Add	*2.14*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.29*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.50*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.72*	
		For Elevated Installation >40' Above Floor, Add	*11.79*	
		For Work In Restricted Working Space, Add	*6.43*	
26 05 33 13-1256	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Replacement Rigid Galvanized Steel (RGS) Mogul Cover	340.06	12.72
		For Elevated Installation >10' To 15' Above Floor, Add	*2.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.91*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.73*	
		For Elevated Installation >40' Above Floor, Add	*14.00*	
		For Work In Restricted Working Space, Add	*7.64*	
26 05 33 13-1257	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Replacement Rigid Galvanized Steel (RGS) Mogul Cover	346.76	16.07
		For Elevated Installation >10' To 15' Above Floor, Add	*3.22*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.43*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.04*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.25*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.86*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.08*	
		For Elevated Installation >40' Above Floor, Add	*17.68*	
		For Work In Restricted Working Space, Add	*9.65*	
26 05 33 13-1258	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Replacement Rigid Galvanized Steel (RGS) Mogul Cover	521.92	18.09
		For Elevated Installation >10' To 15' Above Floor, Add	*3.62*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.23*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.04*	
		For Elevated Installation >25' To 30' Above Floor, Add	*12.66*	
		For Elevated Installation >30' To 35' Above Floor, Add	*14.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*18.09*	
		For Elevated Installation >40' Above Floor, Add	*19.89*	
		For Work In Restricted Working Space, Add	*10.85*	
26 05 33 13-1259	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Replacement Rigid Galvanized Steel (RGS) Mogul Cover	532.64	23.44
		For Elevated Installation >10' To 15' Above Floor, Add	*4.69*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.38*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.72*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.41*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.76*	
		For Elevated Installation >35' To 40' Above Floor, Add	*23.45*	
		For Elevated Installation >40' Above Floor, Add	*25.79*	
		For Work In Restricted Working Space, Add	*14.07*	
26 05 33 13-1260		**Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Expansion Fittings** *(26 05 33 13-0848)*		
26 05 33 13-1261	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Expansion Fitting	232.12	16.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Work In Restricted Working Space, Add	*10.05*	
26 05 33 13-1262	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Expansion Fitting	274.32	20.77
		For Elevated Installation >10' To 15' Above Floor, Add	*4.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.31*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.77*	
		For Elevated Installation >40' Above Floor, Add	*22.84*	
		For Work In Restricted Working Space, Add	*12.46*	
26 05 33 13-1263	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Expansion Fitting	324.76	25.45
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
		For Work In Restricted Working Space, Add	*15.27*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1264	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Expansion Fitting	399.96	29.47
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
		For Work In Restricted Working Space, Add	*17.68*	
26 05 33 13-1265	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Expansion Fitting	534.33	33.49
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	
		For Work In Restricted Working Space, Add	*20.09*	
26 05 33 13-1266	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Expansion Fitting	739.25	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
26 05 33 13-1267	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Expansion Fitting	1,055.40	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	
26 05 33 13-1268	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Expansion Fitting	1,312.65	62.96
		For Elevated Installation >10' To 15' Above Floor, Add	*12.59*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.48*	
		For Elevated Installation >25' To 30' Above Floor, Add	*44.08*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.37*	
		For Elevated Installation >35' To 40' Above Floor, Add	*62.97*	
		For Elevated Installation >40' Above Floor, Add	*69.26*	
		For Work In Restricted Working Space, Add	*37.78*	
26 05 33 13-1269	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Expansion Fitting	1,840.70	71.00
		For Elevated Installation >10' To 15' Above Floor, Add	*14.20*	
		For Elevated Installation >15' To 20' Above Floor, Add	*28.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*35.50*	
		For Elevated Installation >25' To 30' Above Floor, Add	*49.70*	
		For Elevated Installation >30' To 35' Above Floor, Add	*56.80*	
		For Elevated Installation >35' To 40' Above Floor, Add	*71.01*	
		For Elevated Installation >40' Above Floor, Add	*78.11*	
		For Work In Restricted Working Space, Add	*42.60*	
26 05 33 13-1270	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Expansion Fitting	2,122.09	92.43
		For Elevated Installation >10' To 15' Above Floor, Add	*18.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*73.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.44*	
		For Elevated Installation >40' Above Floor, Add	*101.68*	
		For Work In Restricted Working Space, Add	*55.46*	

26 05 33 13-1271 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Expansion Fittings With Bonding Jumper *(26 05 33 13-0848)*

26 05 33 13-1272	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Expansion Fitting With Bonding Jumper	368.20	16.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Work In Restricted Working Space, Add	*10.05*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1273	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Expansion Fitting With Bonding Jumper	382.55	20.77
		For Elevated Installation >10' To 15' Above Floor, Add	*4.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.31*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.77*	
		For Elevated Installation >40' Above Floor, Add	*22.84*	
		For Work In Restricted Working Space, Add	*12.46*	
26 05 33 13-1274	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Expansion Fitting With Bonding Jumper	429.78	25.45
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
		For Work In Restricted Working Space, Add	*15.27*	
26 05 33 13-1275	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Expansion Fitting With Bonding Jumper	519.98	29.47
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
		For Work In Restricted Working Space, Add	*17.68*	
26 05 33 13-1276	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Expansion Fitting With Bonding Jumper	630.16	33.49
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	
		For Work In Restricted Working Space, Add	*20.09*	
26 05 33 13-1277	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Expansion Fitting With Bonding Jumper	805.22	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
26 05 33 13-1278	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Expansion Fitting With Bonding Jumper	1,188.29	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	
26 05 33 13-1279	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Expansion Fitting With Bonding Jumper	1,490.23	62.96
		For Elevated Installation >10' To 15' Above Floor, Add	*12.59*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.48*	
		For Elevated Installation >25' To 30' Above Floor, Add	*44.08*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.37*	
		For Elevated Installation >35' To 40' Above Floor, Add	*62.97*	
		For Elevated Installation >40' Above Floor, Add	*69.26*	
		For Work In Restricted Working Space, Add	*37.78*	
26 05 33 13-1280	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Expansion Fitting With Bonding Jumper	1,898.03	71.00
		For Elevated Installation >10' To 15' Above Floor, Add	*14.20*	
		For Elevated Installation >15' To 20' Above Floor, Add	*28.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*35.50*	
		For Elevated Installation >25' To 30' Above Floor, Add	*49.70*	
		For Elevated Installation >30' To 35' Above Floor, Add	*56.80*	
		For Elevated Installation >35' To 40' Above Floor, Add	*71.01*	
		For Elevated Installation >40' Above Floor, Add	*78.11*	
		For Work In Restricted Working Space, Add	*42.60*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1281	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Expansion Fitting With Bonding Jumper	2,376.00	92.43
		For Elevated Installation >10' To 15' Above Floor, Add	*18.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*73.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.44*	
		For Elevated Installation >40' Above Floor, Add	*101.68*	
		For Work In Restricted Working Space, Add	*55.46*	

26 05 33 13-1282 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS), STG Knockout Hubs *(26 05 33 13-0848)*

26 05 33 13-1283	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STG Knockout Hub	76.84	8.04
		For Elevated Installation >10' To 15' Above Floor, Add	*1.61*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.21*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.62*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.43*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.04*	
		For Elevated Installation >40' Above Floor, Add	*8.84*	
		For Work In Restricted Working Space, Add	*4.82*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.82*	
26 05 33 13-1284	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STG Knockout Hub	83.43	10.05
		For Elevated Installation >10' To 15' Above Floor, Add	*2.01*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.02*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.04*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.05*	
		For Elevated Installation >40' Above Floor, Add	*11.05*	
		For Work In Restricted Working Space, Add	*6.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.03*	
26 05 33 13-1285	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STG Knockout Hub	91.87	12.05
		For Elevated Installation >10' To 15' Above Floor, Add	*2.41*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.82*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.03*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.65*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.06*	
		For Elevated Installation >40' Above Floor, Add	*13.27*	
		For Work In Restricted Working Space, Add	*7.24*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.24*	
26 05 33 13-1286	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STG Knockout Hub	104.02	14.74
		For Elevated Installation >10' To 15' Above Floor, Add	*2.95*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.89*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.31*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*14.74*	
		For Elevated Installation >40' Above Floor, Add	*16.21*	
		For Work In Restricted Working Space, Add	*8.84*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.84*	
26 05 33 13-1287	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STG Knockout Hub	139.67	16.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Work In Restricted Working Space, Add	*10.05*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.05*	
26 05 33 13-1288	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STG Knockout Hub	170.54	18.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.75*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.50*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.13*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.00*	
		For Elevated Installation >35' To 40' Above Floor, Add	*18.76*	
		For Elevated Installation >40' Above Floor, Add	*20.63*	
		For Work In Restricted Working Space, Add	*11.25*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.25*	
26 05 33 13-1289	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STG Knockout Hub	243.86	23.44
		For Elevated Installation >10' To 15' Above Floor, Add	*4.69*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.38*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.72*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.41*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.76*	
		For Elevated Installation >35' To 40' Above Floor, Add	*23.45*	
		For Elevated Installation >40' Above Floor, Add	*25.79*	
		For Work In Restricted Working Space, Add	*14.07*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.07*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1290	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STG Knockout Hub	318.42	31.49
		For Elevated Installation >10' To 15' Above Floor, Add	*6.30*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.59*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.04*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*31.48*	
		For Elevated Installation >40' Above Floor, Add	*34.63*	
		For Work In Restricted Working Space, Add	*18.89*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*18.89*	
26 05 33 13-1291	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STG Knockout Hub	406.20	35.50
		For Elevated Installation >10' To 15' Above Floor, Add	*7.10*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.20*	
		For Elevated Installation >20' To 25' Above Floor, Add	*17.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*24.85*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*35.50*	
		For Elevated Installation >40' Above Floor, Add	*39.05*	
		For Work In Restricted Working Space, Add	*21.30*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.30*	
26 05 33 13-1292	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STG Knockout Hub	511.00	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.73*	
26 05 33 13-1293	EA	5" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STG Knockout Hub	636.83	75.02
		For Elevated Installation >10' To 15' Above Floor, Add	*15.00*	
		For Elevated Installation >15' To 20' Above Floor, Add	*30.01*	
		For Elevated Installation >20' To 25' Above Floor, Add	*37.51*	
		For Elevated Installation >25' To 30' Above Floor, Add	*52.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*60.02*	
		For Elevated Installation >35' To 40' Above Floor, Add	*75.02*	
		For Elevated Installation >40' Above Floor, Add	*82.52*	
		For Work In Restricted Working Space, Add	*45.01*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*45.01*	
26 05 33 13-1294	EA	6" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STG Knockout Hub	960.44	113.20
		For Elevated Installation >10' To 15' Above Floor, Add	*22.64*	
		For Elevated Installation >15' To 20' Above Floor, Add	*45.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*56.60*	
		For Elevated Installation >25' To 30' Above Floor, Add	*79.24*	
		For Elevated Installation >30' To 35' Above Floor, Add	*90.56*	
		For Elevated Installation >35' To 40' Above Floor, Add	*113.20*	
		For Elevated Installation >40' Above Floor, Add	*124.52*	
		For Work In Restricted Working Space, Add	*67.92*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*67.92*	

26 05 33 13-1295 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS), STTB Knockout Hubs *(26 05 33 13-0848)*

26 05 33 13-1296	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STTB Knockout Hub	115.50	8.04
		For Elevated Installation >10' To 15' Above Floor, Add	*1.61*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.21*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.62*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.43*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.04*	
		For Elevated Installation >40' Above Floor, Add	*8.84*	
		For Work In Restricted Working Space, Add	*4.82*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.82*	
26 05 33 13-1297	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STTB Knockout Hub	122.36	10.05
		For Elevated Installation >10' To 15' Above Floor, Add	*2.01*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.02*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.04*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.05*	
		For Elevated Installation >40' Above Floor, Add	*11.05*	
		For Work In Restricted Working Space, Add	*6.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.03*	
26 05 33 13-1298	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STTB Knockout Hub	131.66	12.05
		For Elevated Installation >10' To 15' Above Floor, Add	*2.41*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.82*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.03*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.65*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.06*	
		For Elevated Installation >40' Above Floor, Add	*13.27*	
		For Work In Restricted Working Space, Add	*7.24*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.24*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1299	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STTB Knockout Hub	150.42	14.74
		For Elevated Installation >10' To 15' Above Floor, Add	*2.95*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.89*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.31*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*14.74*	
		For Elevated Installation >40' Above Floor, Add	*16.21*	
		For Work In Restricted Working Space, Add	*8.84*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.84*	
26 05 33 13-1300	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STTB Knockout Hub	161.58	16.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Work In Restricted Working Space, Add	*10.05*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.05*	
26 05 33 13-1301	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STTB Knockout Hub	182.74	18.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.75*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.50*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.13*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.00*	
		For Elevated Installation >35' To 40' Above Floor, Add	*18.76*	
		For Elevated Installation >40' Above Floor, Add	*20.63*	
		For Work In Restricted Working Space, Add	*11.25*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.25*	
26 05 33 13-1302	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STTB Knockout Hub	278.11	23.44
		For Elevated Installation >10' To 15' Above Floor, Add	*4.69*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.38*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.72*	
		For Elevated Installation >25' To 30' Above Floor, Add	*16.41*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.76*	
		For Elevated Installation >35' To 40' Above Floor, Add	*23.45*	
		For Elevated Installation >40' Above Floor, Add	*25.79*	
		For Work In Restricted Working Space, Add	*14.07*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.07*	
26 05 33 13-1303	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STTB Knockout Hub	333.18	31.49
		For Elevated Installation >10' To 15' Above Floor, Add	*6.30*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.59*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.04*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*31.48*	
		For Elevated Installation >40' Above Floor, Add	*34.63*	
		For Work In Restricted Working Space, Add	*18.89*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*18.89*	
26 05 33 13-1304	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STTB Knockout Hub	409.39	35.50
		For Elevated Installation >10' To 15' Above Floor, Add	*7.10*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.20*	
		For Elevated Installation >20' To 25' Above Floor, Add	*17.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*24.85*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*35.50*	
		For Elevated Installation >40' Above Floor, Add	*39.05*	
		For Work In Restricted Working Space, Add	*21.30*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.30*	
26 05 33 13-1305	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STTB Knockout Hub	531.59	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.73*	
26 05 33 13-1306	EA	5" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STTB Knockout Hub	827.23	75.02
		For Elevated Installation >10' To 15' Above Floor, Add	*15.00*	
		For Elevated Installation >15' To 20' Above Floor, Add	*30.01*	
		For Elevated Installation >20' To 25' Above Floor, Add	*37.51*	
		For Elevated Installation >25' To 30' Above Floor, Add	*52.51*	
		For Elevated Installation >30' To 35' Above Floor, Add	*60.02*	
		For Elevated Installation >35' To 40' Above Floor, Add	*75.02*	
		For Elevated Installation >40' Above Floor, Add	*82.52*	
		For Work In Restricted Working Space, Add	*45.01*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*45.01*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1307	EA	6" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STTB Knockout Hub	1,352.83	113.20
		For Elevated Installation >10' To 15' Above Floor, Add	*22.64*	
		For Elevated Installation >15' To 20' Above Floor, Add	*45.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*56.60*	
		For Elevated Installation >25' To 30' Above Floor, Add	*79.24*	
		For Elevated Installation >30' To 35' Above Floor, Add	*90.56*	
		For Elevated Installation >35' To 40' Above Floor, Add	*113.20*	
		For Elevated Installation >40' Above Floor, Add	*124.52*	
		For Work In Restricted Working Space, Add	*67.92*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*67.92*	

26 05 33 13-1308 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS), STTTB Knockout Hubs *(26 05 33 13-0848)*

26 05 33 13-1309	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STTTB Knockout Hub	124.10	8.04
		For Elevated Installation >10' To 15' Above Floor, Add	*1.61*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.21*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.62*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.43*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.04*	
		For Elevated Installation >40' Above Floor, Add	*8.84*	
		For Work In Restricted Working Space, Add	*4.82*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.82*	
26 05 33 13-1310	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STTTB Knockout Hub	130.52	10.05
		For Elevated Installation >10' To 15' Above Floor, Add	*2.01*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.02*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.04*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.05*	
		For Elevated Installation >40' Above Floor, Add	*11.05*	
		For Work In Restricted Working Space, Add	*6.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.03*	
26 05 33 13-1311	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STTTB Knockout Hub	140.19	12.05
		For Elevated Installation >10' To 15' Above Floor, Add	*2.41*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.82*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.03*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.65*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.06*	
		For Elevated Installation >40' Above Floor, Add	*13.27*	
		For Work In Restricted Working Space, Add	*7.24*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.24*	
26 05 33 13-1312	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STTTB Knockout Hub	176.30	14.74
		For Elevated Installation >10' To 15' Above Floor, Add	*2.95*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.89*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.31*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*14.74*	
		For Elevated Installation >40' Above Floor, Add	*16.21*	
		For Work In Restricted Working Space, Add	*8.84*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.84*	
26 05 33 13-1313	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STTTB Knockout Hub	192.82	16.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Work In Restricted Working Space, Add	*10.05*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.05*	
26 05 33 13-1314	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) STTTB Knockout Hub	204.30	18.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.75*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.50*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.13*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.00*	
		For Elevated Installation >35' To 40' Above Floor, Add	*18.76*	
		For Elevated Installation >40' Above Floor, Add	*20.63*	
		For Work In Restricted Working Space, Add	*11.25*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.25*	

26 05 33 13-1315 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS), UNF Conduit Unions *(26 05 33 13-0848)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1316	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNF Conduit Union	93.13	16.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Work In Restricted Working Space, Add	*10.05*	
26 05 33 13-1317	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNF Conduit Union	102.26	20.77
		For Elevated Installation >10' To 15' Above Floor, Add	*4.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.31*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.77*	
		For Elevated Installation >40' Above Floor, Add	*22.84*	
		For Work In Restricted Working Space, Add	*12.46*	
26 05 33 13-1318	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNF Conduit Union	132.32	25.45
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
		For Work In Restricted Working Space, Add	*15.27*	
26 05 33 13-1319	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNF Conduit Union	189.96	29.47
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
		For Work In Restricted Working Space, Add	*17.68*	
26 05 33 13-1320	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNF Conduit Union	225.01	33.49
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	
		For Work In Restricted Working Space, Add	*20.09*	
26 05 33 13-1321	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNF Conduit Union	284.28	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	
26 05 33 13-1322	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNF Conduit Union	377.56	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	
26 05 33 13-1323	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNF Conduit Union	485.51	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	
26 05 33 13-1324	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNF Conduit Union	629.61	71.00
		For Elevated Installation >10' To 15' Above Floor, Add	*14.20*	
		For Elevated Installation >15' To 20' Above Floor, Add	*28.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*35.50*	
		For Elevated Installation >25' To 30' Above Floor, Add	*49.70*	
		For Elevated Installation >30' To 35' Above Floor, Add	*56.80*	
		For Elevated Installation >35' To 40' Above Floor, Add	*71.01*	
		For Elevated Installation >40' Above Floor, Add	*78.11*	
		For Work In Restricted Working Space, Add	*42.60*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1325	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNF Conduit Union	810.96	92.43
		For Elevated Installation >10' To 15' Above Floor, Add	*18.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*73.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.44*	
		For Elevated Installation >40' Above Floor, Add	*101.68*	
		For Work In Restricted Working Space, Add	*55.46*	
26 05 33 13-1326	EA	5" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNF Conduit Union	1,471.64	150.71
		For Elevated Installation >10' To 15' Above Floor, Add	*30.14*	
		For Elevated Installation >15' To 20' Above Floor, Add	*60.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*75.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*105.50*	
		For Elevated Installation >30' To 35' Above Floor, Add	*120.57*	
		For Elevated Installation >35' To 40' Above Floor, Add	*150.71*	
		For Elevated Installation >40' Above Floor, Add	*165.78*	
		For Work In Restricted Working Space, Add	*90.43*	
26 05 33 13-1327	EA	6" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNF Conduit Union	1,846.53	226.41
		For Elevated Installation >10' To 15' Above Floor, Add	*45.28*	
		For Elevated Installation >15' To 20' Above Floor, Add	*90.56*	
		For Elevated Installation >20' To 25' Above Floor, Add	*113.20*	
		For Elevated Installation >25' To 30' Above Floor, Add	*158.48*	
		For Elevated Installation >30' To 35' Above Floor, Add	*181.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*226.41*	
		For Elevated Installation >40' Above Floor, Add	*249.05*	
		For Work In Restricted Working Space, Add	*135.84*	

26 05 33 13-1328 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS), UNY Conduit Unions *(26 05 33 13-0848)*

26 05 33 13-1329	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNY Conduit Union	95.14	16.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Work In Restricted Working Space, Add	*10.05*	
26 05 33 13-1330	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNY Conduit Union	109.93	20.77
		For Elevated Installation >10' To 15' Above Floor, Add	*4.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*8.31*	
		For Elevated Installation >20' To 25' Above Floor, Add	*10.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*14.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*16.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*20.77*	
		For Elevated Installation >40' Above Floor, Add	*22.84*	
		For Work In Restricted Working Space, Add	*12.46*	
26 05 33 13-1331	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNY Conduit Union	136.41	25.45
		For Elevated Installation >10' To 15' Above Floor, Add	*5.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.18*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.46*	
		For Elevated Installation >40' Above Floor, Add	*28.00*	
		For Work In Restricted Working Space, Add	*15.27*	
26 05 33 13-1332	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNY Conduit Union	197.47	29.47
		For Elevated Installation >10' To 15' Above Floor, Add	*5.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*20.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*23.58*	
		For Elevated Installation >35' To 40' Above Floor, Add	*29.47*	
		For Elevated Installation >40' Above Floor, Add	*32.42*	
		For Work In Restricted Working Space, Add	*17.68*	
26 05 33 13-1333	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNY Conduit Union	235.44	33.49
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	
		For Work In Restricted Working Space, Add	*20.09*	
26 05 33 13-1334	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNY Conduit Union	306.79	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.47*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.84*	
		For Elevated Installation >40' Above Floor, Add	*40.52*	
		For Work In Restricted Working Space, Add	*22.10*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1335	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNY Conduit Union	425.71	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	
26 05 33 13-1336	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNY Conduit Union	534.48	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	
26 05 33 13-1337	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNY Conduit Union	718.13	71.00
		For Elevated Installation >10' To 15' Above Floor, Add	*14.20*	
		For Elevated Installation >15' To 20' Above Floor, Add	*28.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*35.50*	
		For Elevated Installation >25' To 30' Above Floor, Add	*49.70*	
		For Elevated Installation >30' To 35' Above Floor, Add	*56.80*	
		For Elevated Installation >35' To 40' Above Floor, Add	*71.01*	
		For Elevated Installation >40' Above Floor, Add	*78.11*	
		For Work In Restricted Working Space, Add	*42.60*	
26 05 33 13-1338	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNY Conduit Union	899.16	92.43
		For Elevated Installation >10' To 15' Above Floor, Add	*18.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*36.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*73.95*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.44*	
		For Elevated Installation >40' Above Floor, Add	*101.68*	
		For Work In Restricted Working Space, Add	*55.46*	
26 05 33 13-1339	EA	5" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNY Conduit Union	1,633.32	150.71
		For Elevated Installation >10' To 15' Above Floor, Add	*30.14*	
		For Elevated Installation >15' To 20' Above Floor, Add	*60.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*75.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*105.50*	
		For Elevated Installation >30' To 35' Above Floor, Add	*120.57*	
		For Elevated Installation >35' To 40' Above Floor, Add	*150.71*	
		For Elevated Installation >40' Above Floor, Add	*165.78*	
		For Work In Restricted Working Space, Add	*90.43*	
26 05 33 13-1340	EA	6" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNY Conduit Union	2,107.60	226.41
		For Elevated Installation >10' To 15' Above Floor, Add	*45.28*	
		For Elevated Installation >15' To 20' Above Floor, Add	*90.56*	
		For Elevated Installation >20' To 25' Above Floor, Add	*113.20*	
		For Elevated Installation >25' To 30' Above Floor, Add	*158.48*	
		For Elevated Installation >30' To 35' Above Floor, Add	*181.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*226.41*	
		For Elevated Installation >40' Above Floor, Add	*249.05*	
		For Work In Restricted Working Space, Add	*135.84*	

26 05 33 13-1341 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS), Reducing Couplings *(26 05 33 13-0848)*

26 05 33 13-1342	EA	3/4" x 1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Reducing Coupling	51.07	5.35
		For Elevated Installation >10' To 15' Above Floor, Add	*1.07*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.14*	
		For Elevated Installation >20' To 25' Above Floor, Add	*2.68*	
		For Elevated Installation >25' To 30' Above Floor, Add	*3.75*	
		For Elevated Installation >30' To 35' Above Floor, Add	*4.29*	
		For Elevated Installation >35' To 40' Above Floor, Add	*5.36*	
		For Elevated Installation >40' Above Floor, Add	*5.90*	
		For Work In Restricted Working Space, Add	*3.22*	
26 05 33 13-1343	EA	1" x 1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Reducing Coupling	56.17	6.70
		For Elevated Installation >10' To 15' Above Floor, Add	*1.34*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.68*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.35*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.69*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.70*	
		For Elevated Installation >40' Above Floor, Add	*7.37*	
		For Work In Restricted Working Space, Add	*4.02*	
26 05 33 13-1344	EA	1" x 3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Reducing Coupling	63.71	6.70
		For Elevated Installation >10' To 15' Above Floor, Add	*1.34*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.68*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.35*	
		For Elevated Installation >25' To 30' Above Floor, Add	*4.69*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.36*	
		For Elevated Installation >35' To 40' Above Floor, Add	*6.70*	
		For Elevated Installation >40' Above Floor, Add	*7.37*	
		For Work In Restricted Working Space, Add	*4.02*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1345	EA	1-1/4" x 3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Reducing Coupling	78.56	7.37
		For Elevated Installation >10' To 15' Above Floor, Add	*1.47*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.95*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.69*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.16*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.90*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.37*	
		For Elevated Installation >40' Above Floor, Add	*8.11*	
		For Work In Restricted Working Space, Add	*4.42*	
26 05 33 13-1346	EA	1-1/4" x 1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Reducing Coupling	82.91	7.37
		For Elevated Installation >10' To 15' Above Floor, Add	*1.47*	
		For Elevated Installation >15' To 20' Above Floor, Add	*2.95*	
		For Elevated Installation >20' To 25' Above Floor, Add	*3.69*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.16*	
		For Elevated Installation >30' To 35' Above Floor, Add	*5.90*	
		For Elevated Installation >35' To 40' Above Floor, Add	*7.37*	
		For Elevated Installation >40' Above Floor, Add	*8.11*	
		For Work In Restricted Working Space, Add	*4.42*	
26 05 33 13-1347	EA	1-1/2" x 3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Reducing Coupling	71.65	8.70
		For Elevated Installation >10' To 15' Above Floor, Add	*1.74*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.48*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.71*	
		For Elevated Installation >40' Above Floor, Add	*9.58*	
		For Work In Restricted Working Space, Add	*5.23*	
26 05 33 13-1348	EA	1-1/2" x 1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Reducing Coupling	81.36	8.70
		For Elevated Installation >10' To 15' Above Floor, Add	*1.74*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.48*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.71*	
		For Elevated Installation >40' Above Floor, Add	*9.58*	
		For Work In Restricted Working Space, Add	*5.23*	
26 05 33 13-1349	EA	1-1/2" x 1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Reducing Coupling	125.01	8.70
		For Elevated Installation >10' To 15' Above Floor, Add	*1.74*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.48*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.71*	
		For Elevated Installation >40' Above Floor, Add	*9.58*	
		For Work In Restricted Working Space, Add	*5.23*	
26 05 33 13-1350	EA	2" x 3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Reducing Coupling	139.03	10.05
		For Elevated Installation >10' To 15' Above Floor, Add	*2.01*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.02*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.04*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.05*	
		For Elevated Installation >40' Above Floor, Add	*11.05*	
		For Work In Restricted Working Space, Add	*6.03*	
26 05 33 13-1351	EA	2" x 1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Reducing Coupling	135.26	10.05
		For Elevated Installation >10' To 15' Above Floor, Add	*2.01*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.02*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.04*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.05*	
		For Elevated Installation >40' Above Floor, Add	*11.05*	
		For Work In Restricted Working Space, Add	*6.03*	
26 05 33 13-1352	EA	2" x 1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Reducing Coupling	142.26	10.05
		For Elevated Installation >10' To 15' Above Floor, Add	*2.01*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.02*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.04*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.05*	
		For Elevated Installation >40' Above Floor, Add	*11.05*	
		For Work In Restricted Working Space, Add	*6.03*	
26 05 33 13-1353	EA	2" x 1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Reducing Coupling	159.87	10.05
		For Elevated Installation >10' To 15' Above Floor, Add	*2.01*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.02*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.04*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.05*	
		For Elevated Installation >40' Above Floor, Add	*11.05*	
		For Work In Restricted Working Space, Add	*6.03*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1354	EA	2-1/2" x 1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Reducing Coupling	159.16	12.05
		For Elevated Installation >10' To 15' Above Floor, Add	*2.41*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.82*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.03*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*9.65*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.06*	
		For Elevated Installation >40' Above Floor, Add	*13.27*	
		For Work In Restricted Working Space, Add	*7.24*	
26 05 33 13-1355	EA	3" x 2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Reducing Coupling	203.19	16.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Work In Restricted Working Space, Add	*10.05*	
26 05 33 13-1356	EA	3-1/2" x 2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Reducing Coupling	298.23	19.42
		For Elevated Installation >10' To 15' Above Floor, Add	*3.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.77*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.71*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.60*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.54*	
		For Elevated Installation >35' To 40' Above Floor, Add	*19.43*	
		For Elevated Installation >40' Above Floor, Add	*21.37*	
		For Work In Restricted Working Space, Add	*11.66*	
26 05 33 13-1357	EA	4" x 3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Reducing Coupling	399.17	26.79
		For Elevated Installation >10' To 15' Above Floor, Add	*5.36*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.72*	
		For Elevated Installation >20' To 25' Above Floor, Add	*13.40*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.76*	
		For Elevated Installation >30' To 35' Above Floor, Add	*21.44*	
		For Elevated Installation >35' To 40' Above Floor, Add	*26.80*	
		For Elevated Installation >40' Above Floor, Add	*29.47*	
		For Work In Restricted Working Space, Add	*16.08*	
26 05 33 13-1358	EA	5" x 4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Reducing Coupling	499.77	36.84
		For Elevated Installation >10' To 15' Above Floor, Add	*7.37*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.74*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.42*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.79*	
		For Elevated Installation >30' To 35' Above Floor, Add	*29.48*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.85*	
		For Elevated Installation >40' Above Floor, Add	*40.53*	
		For Work In Restricted Working Space, Add	*22.11*	

26 05 33 13-1359 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS), Nipples *(26 05 33 13-0848)*

26 05 33 13-1360	EA	1/2" x 2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	32.98	8.04
		For Elevated Installation >10' To 15' Above Floor, Add	*1.61*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.21*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*5.62*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.43*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.04*	
		For Elevated Installation >40' Above Floor, Add	*8.84*	
		For Work In Restricted Working Space, Add	*4.82*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.82*	
26 05 33 13-1361	EA	3/4" x 2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	37.33	10.05
		For Elevated Installation >10' To 15' Above Floor, Add	*2.01*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.02*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.04*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.05*	
		For Elevated Installation >40' Above Floor, Add	*11.05*	
		For Work In Restricted Working Space, Add	*6.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.03*	
26 05 33 13-1362	EA	1" x 2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	43.64	12.72
		For Elevated Installation >10' To 15' Above Floor, Add	*2.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.91*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.73*	
		For Elevated Installation >40' Above Floor, Add	*14.00*	
		For Work In Restricted Working Space, Add	*7.64*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.64*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1363	EA	1-1/4" x 2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	51.84	14.74
		For Elevated Installation >10' To 15' Above Floor, Add	*2.95*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.89*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.31*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*14.74*	
		For Elevated Installation >40' Above Floor, Add	*16.21*	
		For Work In Restricted Working Space, Add	*8.84*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.84*	
26 05 33 13-1364	EA	1-1/2" x 2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	56.59	16.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Work In Restricted Working Space, Add	*10.05*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.05*	
26 05 33 13-1365	EA	1/2" x 2-1/2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	36.51	8.70
		For Elevated Installation >10' To 15' Above Floor, Add	*1.74*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.48*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.71*	
		For Elevated Installation >40' Above Floor, Add	*9.58*	
		For Work In Restricted Working Space, Add	*5.23*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.23*	
26 05 33 13-1366	EA	3/4" x 2-1/2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	39.64	10.05
		For Elevated Installation >10' To 15' Above Floor, Add	*2.01*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.02*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.04*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.05*	
		For Elevated Installation >40' Above Floor, Add	*11.05*	
		For Work In Restricted Working Space, Add	*6.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.03*	
26 05 33 13-1367	EA	1" x 2-1/2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	45.97	12.72
		For Elevated Installation >10' To 15' Above Floor, Add	*2.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.91*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.73*	
		For Elevated Installation >40' Above Floor, Add	*14.00*	
		For Work In Restricted Working Space, Add	*7.64*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.64*	
26 05 33 13-1368	EA	1-1/4" x 2-1/2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	54.31	14.74
		For Elevated Installation >10' To 15' Above Floor, Add	*2.95*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.89*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.31*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*14.74*	
		For Elevated Installation >40' Above Floor, Add	*16.21*	
		For Work In Restricted Working Space, Add	*8.84*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.84*	
26 05 33 13-1369	EA	1-1/2" x 2-1/2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	59.26	16.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Work In Restricted Working Space, Add	*10.05*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.05*	
26 05 33 13-1370	EA	2" x 2-1/2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	64.43	18.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.75*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.50*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.13*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.00*	
		For Elevated Installation >35' To 40' Above Floor, Add	*18.76*	
		For Elevated Installation >40' Above Floor, Add	*20.63*	
		For Work In Restricted Working Space, Add	*11.25*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.25*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1371	EA	1/2" x 3" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	36.67	8.70
		For Elevated Installation >10' To 15' Above Floor, Add	*1.74*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.48*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.71*	
		For Elevated Installation >40' Above Floor, Add	*9.58*	
		For Work In Restricted Working Space, Add	*5.23*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.23*	
26 05 33 13-1372	EA	3/4" x 3" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	39.80	10.05
		For Elevated Installation >10' To 15' Above Floor, Add	*2.01*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.02*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.04*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.05*	
		For Elevated Installation >40' Above Floor, Add	*11.05*	
		For Work In Restricted Working Space, Add	*6.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.03*	
26 05 33 13-1373	EA	1" x 3" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	46.27	12.72
		For Elevated Installation >10' To 15' Above Floor, Add	*2.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.91*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.73*	
		For Elevated Installation >40' Above Floor, Add	*14.00*	
		For Work In Restricted Working Space, Add	*7.64*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.64*	
26 05 33 13-1374	EA	1-1/4" x 3" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	54.63	14.74
		For Elevated Installation >10' To 15' Above Floor, Add	*2.95*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.89*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.31*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*14.74*	
		For Elevated Installation >40' Above Floor, Add	*16.21*	
		For Work In Restricted Working Space, Add	*8.84*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.84*	
26 05 33 13-1375	EA	1-1/2" x 3" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	59.58	16.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Work In Restricted Working Space, Add	*10.05*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.05*	
26 05 33 13-1376	EA	2" x 3" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	65.26	18.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.75*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.50*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.13*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.00*	
		For Elevated Installation >35' To 40' Above Floor, Add	*18.76*	
		For Elevated Installation >40' Above Floor, Add	*20.63*	
		For Work In Restricted Working Space, Add	*11.25*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.25*	
26 05 33 13-1377	EA	1/2" x 3-1/2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	38.86	8.70
		For Elevated Installation >10' To 15' Above Floor, Add	*1.74*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.48*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.71*	
		For Elevated Installation >40' Above Floor, Add	*9.58*	
		For Work In Restricted Working Space, Add	*5.23*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.23*	
26 05 33 13-1378	EA	3/4" x 3-1/2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	42.00	10.05
		For Elevated Installation >10' To 15' Above Floor, Add	*2.01*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.02*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.04*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.05*	
		For Elevated Installation >40' Above Floor, Add	*11.05*	
		For Work In Restricted Working Space, Add	*6.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.03*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1379	EA	1" x 3-1/2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	48.63	12.72
		For Elevated Installation >10' To 15' Above Floor, Add	*2.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.91*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.73*	
		For Elevated Installation >40' Above Floor, Add	*14.00*	
		For Work In Restricted Working Space, Add	*7.64*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.64*	
26 05 33 13-1380	EA	1-1/4" x 3-1/2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	55.97	14.74
		For Elevated Installation >10' To 15' Above Floor, Add	*2.95*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.89*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.31*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*14.74*	
		For Elevated Installation >40' Above Floor, Add	*16.21*	
		For Work In Restricted Working Space, Add	*8.84*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.84*	
26 05 33 13-1381	EA	1-1/2" x 3-1/2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	61.06	16.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Work In Restricted Working Space, Add	*10.05*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.05*	
26 05 33 13-1382	EA	2" x 3-1/2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	67.85	18.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.75*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.50*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.13*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.00*	
		For Elevated Installation >35' To 40' Above Floor, Add	*18.76*	
		For Elevated Installation >40' Above Floor, Add	*20.63*	
		For Work In Restricted Working Space, Add	*11.25*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.25*	
26 05 33 13-1383	EA	2-1/2" x 3-1/2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	93.70	22.77
		For Elevated Installation >10' To 15' Above Floor, Add	*4.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.11*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.39*	
		For Elevated Installation >25' To 30' Above Floor, Add	*15.94*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.22*	
		For Elevated Installation >35' To 40' Above Floor, Add	*22.77*	
		For Elevated Installation >40' Above Floor, Add	*25.05*	
		For Work In Restricted Working Space, Add	*13.66*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.66*	
26 05 33 13-1384	EA	3" x 3-1/2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	121.88	31.49
		For Elevated Installation >10' To 15' Above Floor, Add	*6.30*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.59*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.04*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*31.48*	
		For Elevated Installation >40' Above Floor, Add	*34.63*	
		For Work In Restricted Working Space, Add	*18.89*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*18.89*	
26 05 33 13-1385	EA	1/2" x 4" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	39.03	8.70
		For Elevated Installation >10' To 15' Above Floor, Add	*1.74*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.48*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.71*	
		For Elevated Installation >40' Above Floor, Add	*9.58*	
		For Work In Restricted Working Space, Add	*5.23*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.23*	
26 05 33 13-1386	EA	3/4" x 4" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	42.30	10.05
		For Elevated Installation >10' To 15' Above Floor, Add	*2.01*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.02*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.04*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.05*	
		For Elevated Installation >40' Above Floor, Add	*11.05*	
		For Work In Restricted Working Space, Add	*6.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.03*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1387	EA	1" x 4" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	48.95	12.72
		For Elevated Installation >10' To 15' Above Floor, Add	*2.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.91*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.73*	
		For Elevated Installation >40' Above Floor, Add	*14.00*	
		For Work In Restricted Working Space, Add	*7.64*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.64*	
26 05 33 13-1388	EA	1-1/4" x 4" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	57.31	14.74
		For Elevated Installation >10' To 15' Above Floor, Add	*2.95*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.89*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.31*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*14.74*	
		For Elevated Installation >40' Above Floor, Add	*16.21*	
		For Work In Restricted Working Space, Add	*8.84*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.84*	
26 05 33 13-1389	EA	1-1/2" x 4" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	62.54	16.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Work In Restricted Working Space, Add	*10.05*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.05*	
26 05 33 13-1390	EA	2" x 4" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	70.44	18.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.75*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.50*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.13*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.00*	
		For Elevated Installation >35' To 40' Above Floor, Add	*18.76*	
		For Elevated Installation >40' Above Floor, Add	*20.63*	
		For Work In Restricted Working Space, Add	*11.25*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.25*	
26 05 33 13-1391	EA	2-1/2" x 4" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	95.98	22.77
		For Elevated Installation >10' To 15' Above Floor, Add	*4.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.11*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.39*	
		For Elevated Installation >25' To 30' Above Floor, Add	*15.94*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.22*	
		For Elevated Installation >35' To 40' Above Floor, Add	*22.77*	
		For Elevated Installation >40' Above Floor, Add	*25.05*	
		For Work In Restricted Working Space, Add	*13.66*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.66*	
26 05 33 13-1392	EA	3" x 4" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	126.81	31.49
		For Elevated Installation >10' To 15' Above Floor, Add	*6.30*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.59*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.04*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*31.48*	
		For Elevated Installation >40' Above Floor, Add	*34.63*	
		For Work In Restricted Working Space, Add	*18.89*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*18.89*	
26 05 33 13-1393	EA	3-1/2" x 4" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	150.62	35.50
		For Elevated Installation >10' To 15' Above Floor, Add	*7.10*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.20*	
		For Elevated Installation >20' To 25' Above Floor, Add	*17.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*24.85*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*35.50*	
		For Elevated Installation >40' Above Floor, Add	*39.04*	
		For Work In Restricted Working Space, Add	*21.30*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.30*	
26 05 33 13-1394	EA	4" x 4" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	177.63	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.73*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1395	EA	1/2" x 5" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	39.33	8.70
		For Elevated Installation >10' To 15' Above Floor, Add	*1.74*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.48*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.71*	
		For Elevated Installation >40' Above Floor, Add	*9.58*	
		For Work In Restricted Working Space, Add	*5.23*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.23*	
26 05 33 13-1396	EA	3/4" x 5" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	42.62	10.05
		For Elevated Installation >10' To 15' Above Floor, Add	*2.01*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.02*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.04*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.05*	
		For Elevated Installation >40' Above Floor, Add	*11.05*	
		For Work In Restricted Working Space, Add	*6.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.03*	
26 05 33 13-1397	EA	1" x 5" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	49.30	12.72
		For Elevated Installation >10' To 15' Above Floor, Add	*2.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.91*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.73*	
		For Elevated Installation >40' Above Floor, Add	*14.00*	
		For Work In Restricted Working Space, Add	*7.64*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.64*	
26 05 33 13-1398	EA	1-1/4" x 5" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	57.94	14.74
		For Elevated Installation >10' To 15' Above Floor, Add	*2.95*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.89*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.31*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*14.74*	
		For Elevated Installation >40' Above Floor, Add	*16.21*	
		For Work In Restricted Working Space, Add	*8.84*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.84*	
26 05 33 13-1399	EA	1-1/2" x 5" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	63.18	16.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Work In Restricted Working Space, Add	*10.05*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.05*	
26 05 33 13-1400	EA	2" x 5" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	71.85	18.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.75*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.50*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.13*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.00*	
		For Elevated Installation >35' To 40' Above Floor, Add	*18.76*	
		For Elevated Installation >40' Above Floor, Add	*20.63*	
		For Work In Restricted Working Space, Add	*11.25*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.25*	
26 05 33 13-1401	EA	2-1/2" x 5" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	105.09	22.77
		For Elevated Installation >10' To 15' Above Floor, Add	*4.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.11*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.39*	
		For Elevated Installation >25' To 30' Above Floor, Add	*15.94*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.22*	
		For Elevated Installation >35' To 40' Above Floor, Add	*22.77*	
		For Elevated Installation >40' Above Floor, Add	*25.05*	
		For Work In Restricted Working Space, Add	*13.66*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.66*	
26 05 33 13-1402	EA	3" x 5" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	134.18	31.49
		For Elevated Installation >10' To 15' Above Floor, Add	*6.30*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.59*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.04*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*31.48*	
		For Elevated Installation >40' Above Floor, Add	*34.63*	
		For Work In Restricted Working Space, Add	*18.89*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*18.89*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1403	EA	3-1/2" x 5" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	152.19	35.50
		For Elevated Installation >10' To 15' Above Floor, Add	*7.10*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.20*	
		For Elevated Installation >20' To 25' Above Floor, Add	*17.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*24.85*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*35.50*	
		For Elevated Installation >40' Above Floor, Add	*39.04*	
		For Work In Restricted Working Space, Add	*21.30*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.30*	
26 05 33 13-1404	EA	4" x 5" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	181.83	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.73*	
26 05 33 13-1405	EA	5" x 5" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	266.32	63.63
		For Elevated Installation >10' To 15' Above Floor, Add	*12.73*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.45*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.82*	
		For Elevated Installation >25' To 30' Above Floor, Add	*44.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.90*	
		For Elevated Installation >35' To 40' Above Floor, Add	*63.63*	
		For Elevated Installation >40' Above Floor, Add	*69.99*	
		For Work In Restricted Working Space, Add	*38.18*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*38.18*	
26 05 33 13-1406	EA	1/2" x 6" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	39.90	8.70
		For Elevated Installation >10' To 15' Above Floor, Add	*1.74*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.48*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.71*	
		For Elevated Installation >40' Above Floor, Add	*9.58*	
		For Work In Restricted Working Space, Add	*5.23*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.23*	
26 05 33 13-1407	EA	3/4" x 6" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	43.20	10.05
		For Elevated Installation >10' To 15' Above Floor, Add	*2.01*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.02*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.04*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.05*	
		For Elevated Installation >40' Above Floor, Add	*11.05*	
		For Work In Restricted Working Space, Add	*6.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.03*	
26 05 33 13-1408	EA	1" x 6" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	49.92	12.72
		For Elevated Installation >10' To 15' Above Floor, Add	*2.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.91*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.73*	
		For Elevated Installation >40' Above Floor, Add	*14.00*	
		For Work In Restricted Working Space, Add	*7.64*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.64*	
26 05 33 13-1409	EA	1-1/4" x 6" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	59.09	14.74
		For Elevated Installation >10' To 15' Above Floor, Add	*2.95*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.89*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.31*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*14.74*	
		For Elevated Installation >40' Above Floor, Add	*16.21*	
		For Work In Restricted Working Space, Add	*8.84*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.84*	
26 05 33 13-1410	EA	1-1/2" x 6" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	64.57	16.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Work In Restricted Working Space, Add	*10.05*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.05*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1411	EA	2" x 6" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	73.26	18.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.75*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.50*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.13*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.00*	
		For Elevated Installation >35' To 40' Above Floor, Add	*18.76*	
		For Elevated Installation >40' Above Floor, Add	*20.63*	
		For Work In Restricted Working Space, Add	*11.25*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.25*	
26 05 33 13-1412	EA	2-1/2" x 6" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	114.33	22.77
		For Elevated Installation >10' To 15' Above Floor, Add	*4.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.11*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.39*	
		For Elevated Installation >25' To 30' Above Floor, Add	*15.94*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.22*	
		For Elevated Installation >35' To 40' Above Floor, Add	*22.77*	
		For Elevated Installation >40' Above Floor, Add	*25.05*	
		For Work In Restricted Working Space, Add	*13.66*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.66*	
26 05 33 13-1413	EA	3" x 6" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	143.98	31.49
		For Elevated Installation >10' To 15' Above Floor, Add	*6.30*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.59*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.04*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*31.48*	
		For Elevated Installation >40' Above Floor, Add	*34.63*	
		For Work In Restricted Working Space, Add	*18.89*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*18.89*	
26 05 33 13-1414	EA	3-1/2" x 6" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	161.02	35.50
		For Elevated Installation >10' To 15' Above Floor, Add	*7.10*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.20*	
		For Elevated Installation >20' To 25' Above Floor, Add	*17.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*24.85*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*35.50*	
		For Elevated Installation >40' Above Floor, Add	*39.04*	
		For Work In Restricted Working Space, Add	*21.30*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.30*	
26 05 33 13-1415	EA	4" x 6" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	196.71	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.73*	
26 05 33 13-1416	EA	5" x 6" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	288.57	63.63
		For Elevated Installation >10' To 15' Above Floor, Add	*12.73*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.45*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.82*	
		For Elevated Installation >25' To 30' Above Floor, Add	*44.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.90*	
		For Elevated Installation >35' To 40' Above Floor, Add	*63.63*	
		For Elevated Installation >40' Above Floor, Add	*69.99*	
		For Work In Restricted Working Space, Add	*38.18*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*38.18*	
26 05 33 13-1417	EA	1/2" x 8" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	40.80	8.70
		For Elevated Installation >10' To 15' Above Floor, Add	*1.74*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.48*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.71*	
		For Elevated Installation >40' Above Floor, Add	*9.58*	
		For Work In Restricted Working Space, Add	*5.23*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.23*	
26 05 33 13-1418	EA	3/4" x 8" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	44.08	10.05
		For Elevated Installation >10' To 15' Above Floor, Add	*2.01*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.02*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.04*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.05*	
		For Elevated Installation >40' Above Floor, Add	*11.05*	
		For Work In Restricted Working Space, Add	*6.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.03*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1419	EA	1" x 8" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	51.31	12.72
		For Elevated Installation >10' To 15' Above Floor, Add	*2.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.91*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.73*	
		For Elevated Installation >40' Above Floor, Add	*14.00*	
		For Work In Restricted Working Space, Add	*7.64*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.64*	
26 05 33 13-1420	EA	1-1/4" x 8" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	59.39	14.74
		For Elevated Installation >10' To 15' Above Floor, Add	*2.95*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.89*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.31*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*14.74*	
		For Elevated Installation >40' Above Floor, Add	*16.21*	
		For Work In Restricted Working Space, Add	*8.84*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.84*	
26 05 33 13-1421	EA	1-1/2" x 8" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	67.39	16.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Work In Restricted Working Space, Add	*10.05*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.05*	
26 05 33 13-1422	EA	2" x 8" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	80.14	18.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.75*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.50*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.13*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.00*	
		For Elevated Installation >35' To 40' Above Floor, Add	*18.76*	
		For Elevated Installation >40' Above Floor, Add	*20.63*	
		For Work In Restricted Working Space, Add	*11.25*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.25*	
26 05 33 13-1423	EA	2-1/2" x 8" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	125.70	22.77
		For Elevated Installation >10' To 15' Above Floor, Add	*4.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.11*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.39*	
		For Elevated Installation >25' To 30' Above Floor, Add	*15.94*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.22*	
		For Elevated Installation >35' To 40' Above Floor, Add	*22.77*	
		For Elevated Installation >40' Above Floor, Add	*25.05*	
		For Work In Restricted Working Space, Add	*13.66*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.66*	
26 05 33 13-1424	EA	3" x 8" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	157.38	31.49
		For Elevated Installation >10' To 15' Above Floor, Add	*6.30*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.59*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.04*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*31.48*	
		For Elevated Installation >40' Above Floor, Add	*34.63*	
		For Work In Restricted Working Space, Add	*18.89*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*18.89*	
26 05 33 13-1425	EA	3-1/2" x 8" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	183.11	35.50
		For Elevated Installation >10' To 15' Above Floor, Add	*7.10*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.20*	
		For Elevated Installation >20' To 25' Above Floor, Add	*17.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*24.85*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*35.50*	
		For Elevated Installation >40' Above Floor, Add	*39.04*	
		For Work In Restricted Working Space, Add	*21.30*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.30*	
26 05 33 13-1426	EA	4" x 8" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	219.06	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.73*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1427	EA	5" x 8" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	303.83	63.63
		For Elevated Installation >10' To 15' Above Floor, Add	*12.73*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.45*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.82*	
		For Elevated Installation >25' To 30' Above Floor, Add	*44.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.90*	
		For Elevated Installation >35' To 40' Above Floor, Add	*63.63*	
		For Elevated Installation >40' Above Floor, Add	*69.99*	
		For Work In Restricted Working Space, Add	*38.18*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*38.18*	
26 05 33 13-1428	EA	1/2" x 10" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	41.75	8.70
		For Elevated Installation >10' To 15' Above Floor, Add	*1.74*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.48*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.71*	
		For Elevated Installation >40' Above Floor, Add	*9.58*	
		For Work In Restricted Working Space, Add	*5.23*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.23*	
26 05 33 13-1429	EA	3/4" x 10" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	45.00	10.05
		For Elevated Installation >10' To 15' Above Floor, Add	*2.01*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.02*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.04*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.05*	
		For Elevated Installation >40' Above Floor, Add	*11.05*	
		For Work In Restricted Working Space, Add	*6.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.03*	
26 05 33 13-1430	EA	1" x 10" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	52.67	12.72
		For Elevated Installation >10' To 15' Above Floor, Add	*2.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.91*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.73*	
		For Elevated Installation >40' Above Floor, Add	*14.00*	
		For Work In Restricted Working Space, Add	*7.64*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.64*	
26 05 33 13-1431	EA	1-1/4" x 10" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	63.55	14.74
		For Elevated Installation >10' To 15' Above Floor, Add	*2.95*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.89*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.31*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*14.74*	
		For Elevated Installation >40' Above Floor, Add	*16.21*	
		For Work In Restricted Working Space, Add	*8.84*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.84*	
26 05 33 13-1432	EA	1-1/2" x 10" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	74.09	16.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Work In Restricted Working Space, Add	*10.05*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.05*	
26 05 33 13-1433	EA	2" x 10" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	90.26	18.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.75*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.50*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.13*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.00*	
		For Elevated Installation >35' To 40' Above Floor, Add	*18.76*	
		For Elevated Installation >40' Above Floor, Add	*20.63*	
		For Work In Restricted Working Space, Add	*11.25*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.25*	
26 05 33 13-1434	EA	2-1/2" x 10" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	137.72	22.77
		For Elevated Installation >10' To 15' Above Floor, Add	*4.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.11*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.39*	
		For Elevated Installation >25' To 30' Above Floor, Add	*15.94*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.22*	
		For Elevated Installation >35' To 40' Above Floor, Add	*22.77*	
		For Elevated Installation >40' Above Floor, Add	*25.05*	
		For Work In Restricted Working Space, Add	*13.66*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.66*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1435	EA	3" x 10" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	174.55	31.49
		For Elevated Installation >10' To 15' Above Floor, Add	*6.30*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.59*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.04*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*31.48*	
		For Elevated Installation >40' Above Floor, Add	*34.63*	
		For Work In Restricted Working Space, Add	*18.89*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*18.89*	
26 05 33 13-1436	EA	3-1/2" x 10" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	206.31	35.50
		For Elevated Installation >10' To 15' Above Floor, Add	*7.10*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.20*	
		For Elevated Installation >20' To 25' Above Floor, Add	*17.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*24.85*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*35.50*	
		For Elevated Installation >40' Above Floor, Add	*39.04*	
		For Work In Restricted Working Space, Add	*21.30*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.30*	
26 05 33 13-1437	EA	4" x 10" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	258.16	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.73*	
26 05 33 13-1438	EA	5" x 10" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	334.26	63.63
		For Elevated Installation >10' To 15' Above Floor, Add	*12.73*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.45*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.82*	
		For Elevated Installation >25' To 30' Above Floor, Add	*44.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.90*	
		For Elevated Installation >35' To 40' Above Floor, Add	*63.63*	
		For Elevated Installation >40' Above Floor, Add	*69.99*	
		For Work In Restricted Working Space, Add	*38.18*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*38.18*	
26 05 33 13-1439	EA	1/2" x 12" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	42.72	8.70
		For Elevated Installation >10' To 15' Above Floor, Add	*1.74*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.48*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*6.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*8.71*	
		For Elevated Installation >40' Above Floor, Add	*9.58*	
		For Work In Restricted Working Space, Add	*5.23*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.23*	
26 05 33 13-1440	EA	3/4" x 12" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	46.09	10.05
		For Elevated Installation >10' To 15' Above Floor, Add	*2.01*	
		For Elevated Installation >15' To 20' Above Floor, Add	*4.02*	
		For Elevated Installation >20' To 25' Above Floor, Add	*5.02*	
		For Elevated Installation >25' To 30' Above Floor, Add	*7.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*8.04*	
		For Elevated Installation >35' To 40' Above Floor, Add	*10.05*	
		For Elevated Installation >40' Above Floor, Add	*11.05*	
		For Work In Restricted Working Space, Add	*6.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.03*	
26 05 33 13-1441	EA	1" x 12" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	56.14	12.72
		For Elevated Installation >10' To 15' Above Floor, Add	*2.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.09*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.36*	
		For Elevated Installation >25' To 30' Above Floor, Add	*8.91*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.73*	
		For Elevated Installation >40' Above Floor, Add	*14.00*	
		For Work In Restricted Working Space, Add	*7.64*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.64*	
26 05 33 13-1442	EA	1-1/4" x 12" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	70.39	14.74
		For Elevated Installation >10' To 15' Above Floor, Add	*2.95*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.89*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*10.31*	
		For Elevated Installation >30' To 35' Above Floor, Add	*11.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*14.74*	
		For Elevated Installation >40' Above Floor, Add	*16.21*	
		For Work In Restricted Working Space, Add	*8.84*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.84*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1443	EA	1-1/2" x 12" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	82.20	16.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.35*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.70*	
		For Elevated Installation >20' To 25' Above Floor, Add	*8.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*13.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*16.75*	
		For Elevated Installation >40' Above Floor, Add	*18.42*	
		For Work In Restricted Working Space, Add	*10.05*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.05*	
26 05 33 13-1444	EA	2" x 12" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	98.40	18.75
		For Elevated Installation >10' To 15' Above Floor, Add	*3.75*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.50*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.13*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.00*	
		For Elevated Installation >35' To 40' Above Floor, Add	*18.76*	
		For Elevated Installation >40' Above Floor, Add	*20.63*	
		For Work In Restricted Working Space, Add	*11.25*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.25*	
26 05 33 13-1445	EA	2-1/2" x 12" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	153.75	22.77
		For Elevated Installation >10' To 15' Above Floor, Add	*4.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.11*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.39*	
		For Elevated Installation >25' To 30' Above Floor, Add	*15.94*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.22*	
		For Elevated Installation >35' To 40' Above Floor, Add	*22.77*	
		For Elevated Installation >40' Above Floor, Add	*25.05*	
		For Work In Restricted Working Space, Add	*13.66*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.66*	
26 05 33 13-1446	EA	3" x 12" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	200.29	31.49
		For Elevated Installation >10' To 15' Above Floor, Add	*6.30*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.59*	
		For Elevated Installation >20' To 25' Above Floor, Add	*15.74*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.04*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.18*	
		For Elevated Installation >35' To 40' Above Floor, Add	*31.48*	
		For Elevated Installation >40' Above Floor, Add	*34.63*	
		For Work In Restricted Working Space, Add	*18.89*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*18.89*	
26 05 33 13-1447	EA	3-1/2" x 12" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	220.54	35.50
		For Elevated Installation >10' To 15' Above Floor, Add	*7.10*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.20*	
		For Elevated Installation >20' To 25' Above Floor, Add	*17.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*24.85*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.40*	
		For Elevated Installation >35' To 40' Above Floor, Add	*35.50*	
		For Elevated Installation >40' Above Floor, Add	*39.04*	
		For Work In Restricted Working Space, Add	*21.30*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.30*	
26 05 33 13-1448	EA	4" x 12" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	270.15	46.22
		For Elevated Installation >10' To 15' Above Floor, Add	*9.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*23.11*	
		For Elevated Installation >25' To 30' Above Floor, Add	*32.35*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*46.22*	
		For Elevated Installation >40' Above Floor, Add	*50.84*	
		For Work In Restricted Working Space, Add	*27.73*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.73*	
26 05 33 13-1449	EA	5" x 12" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple	338.60	63.63
		For Elevated Installation >10' To 15' Above Floor, Add	*12.73*	
		For Elevated Installation >15' To 20' Above Floor, Add	*25.45*	
		For Elevated Installation >20' To 25' Above Floor, Add	*31.82*	
		For Elevated Installation >25' To 30' Above Floor, Add	*44.54*	
		For Elevated Installation >30' To 35' Above Floor, Add	*50.90*	
		For Elevated Installation >35' To 40' Above Floor, Add	*63.63*	
		For Elevated Installation >40' Above Floor, Add	*69.99*	
		For Work In Restricted Working Space, Add	*38.18*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*38.18*	

26 05 33 13-1450 Aluminum Rigid Conduit (ARC) *(26 05 33 13-0059)*

Note: Exposed installation, branch and feeder conduit. Excludes supporting strap, hanger and fastening.

26 05 33 13-1451 Aluminum Rigid Conduit (ARC) With Threaded Coupling *(26 05 33 13-1450)*

Note: Includes field bending conduit up to and including 1". See CSI section 26 05 33 13-2319 for field bending >1".

26 05 33 13-1452	LF	1/2" Aluminum Rigid Conduit (ARC) With Threaded Coupling	6.16	2.07
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*0.77*	
		For Work In Restricted Working Space, Add	*1.55*	
26 05 33 13-1453	LF	3/4" Aluminum Rigid Conduit (ARC) With Threaded Coupling	7.01	2.27
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*0.85*	
		For Work In Restricted Working Space, Add	*1.70*	
26 05 33 13-1454	LF	1" Aluminum Rigid Conduit (ARC) With Threaded Coupling	8.10	2.48
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*0.93*	
		For Work In Restricted Working Space, Add	*1.86*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1455	LF	1-1/4" Aluminum Rigid Conduit (ARC) With Threaded Coupling	9.21	2.68
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*1.01*	
		For Work In Restricted Working Space, Add	*2.01*	
26 05 33 13-1456	LF	1-1/2" Aluminum Rigid Conduit (ARC) With Threaded Coupling	10.32	2.89
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*1.08*	
		For Work In Restricted Working Space, Add	*2.16*	
26 05 33 13-1457	LF	2" Aluminum Rigid Conduit (ARC) With Threaded Coupling	12.40	3.30
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*1.24*	
		For Work In Restricted Working Space, Add	*2.47*	
26 05 33 13-1458	LF	2-1/2" Aluminum Rigid Conduit (ARC) With Threaded Coupling	16.88	4.12
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*1.55*	
		For Work In Restricted Working Space, Add	*3.09*	
26 05 33 13-1459	LF	3" Aluminum Rigid Conduit (ARC) With Threaded Coupling	21.00	4.94
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*1.85*	
		For Work In Restricted Working Space, Add	*3.71*	
26 05 33 13-1460	LF	3-1/2" Aluminum Rigid Conduit (ARC) With Threaded Coupling	25.83	6.19
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*2.32*	
		For Work In Restricted Working Space, Add	*4.64*	
26 05 33 13-1461	LF	4" Aluminum Rigid Conduit (ARC) With Threaded Coupling	31.86	7.83
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*2.94*	
		For Work In Restricted Working Space, Add	*5.87*	
26 05 33 13-1462	LF	5" Aluminum Rigid Conduit (ARC) With Threaded Coupling	42.30	9.90
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*3.71*	
		For Work In Restricted Working Space, Add	*7.42*	
26 05 33 13-1463	LF	6" Aluminum Rigid Conduit (ARC) With Threaded Coupling	54.03	12.36
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*4.64*	
		For Work In Restricted Working Space, Add	*9.27*	

26 05 33 13-1464 Aluminum 90 Degree Elbows *(26 05 33 13-1450)*

26 05 33 13-1465	EA	1" Aluminum 90 Degree Elbow	37.49	10.72
		For Work In Restricted Working Space, Add	*8.04*	
26 05 33 13-1466	EA	1-1/4" Aluminum 90 Degree Elbow	47.40	12.16
		For Work In Restricted Working Space, Add	*9.12*	
26 05 33 13-1467	EA	1-1/2" Aluminum 90 Degree Elbow	57.66	14.02
		For Work In Restricted Working Space, Add	*10.51*	
26 05 33 13-1468	EA	2" Aluminum 90 Degree Elbow	73.50	16.07
		For Work In Restricted Working Space, Add	*12.06*	
26 05 33 13-1469	EA	2-1/2" Aluminum 90 Degree Elbow	105.08	19.58
		For Work In Restricted Working Space, Add	*14.69*	
26 05 33 13-1470	EA	3" Aluminum 90 Degree Elbow	150.07	25.35
		For Work In Restricted Working Space, Add	*19.01*	
26 05 33 13-1471	EA	3-1/2" Aluminum 90 Degree Elbow	206.33	28.44
		For Work In Restricted Working Space, Add	*21.33*	
26 05 33 13-1472	EA	4" Aluminum 90 Degree Elbow	249.48	35.66
		For Work In Restricted Working Space, Add	*26.74*	
26 05 33 13-1473	EA	5" Aluminum 90 Degree Elbow	619.41	58.12
		For Work In Restricted Working Space, Add	*43.59*	
26 05 33 13-1474	EA	6" Aluminum 90 Degree Elbow	874.42	87.39
		For Work In Restricted Working Space, Add	*65.54*	

26 05 33 13-1475 Aluminum Bushing Set With Locknut *(26 05 33 13-1450)*

26 05 33 13-1476	EA	1/2" Aluminum Bushing Set With Locknut	11.12	4.12
		For Work In Restricted Working Space, Add	*3.09*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.09*	
26 05 33 13-1477	EA	3/4" Aluminum Bushing Set With Locknut	16.68	5.35
		For Work In Restricted Working Space, Add	*4.02*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.02*	
26 05 33 13-1478	EA	1" Aluminum Bushing Set With Locknut	17.02	6.60
		For Work In Restricted Working Space, Add	*4.95*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.95*	
26 05 33 13-1479	EA	1-1/4" Aluminum Bushing Set With Locknut	19.14	7.42
		For Work In Restricted Working Space, Add	*5.57*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.57*	
26 05 33 13-1480	EA	1-1/2" Aluminum Bushing Set With Locknut	23.42	9.06
		For Work In Restricted Working Space, Add	*6.80*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 05 33 13-1481	EA	2" Aluminum Bushing Set With Locknut	28.54	10.92
		For Work In Restricted Working Space, Add	*8.19*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.19*	
26 05 33 13-1482	EA	2-1/2" Aluminum Bushing Set With Locknut	35.00	12.99
		For Work In Restricted Working Space, Add	*9.74*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.74*	
26 05 33 13-1483	EA	3" Aluminum Bushing Set With Locknut	40.86	14.84
		For Work In Restricted Working Space, Add	*11.13*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.13*	
26 05 33 13-1484	EA	3-1/2" Aluminum Bushing Set With Locknut	44.19	16.07
		For Work In Restricted Working Space, Add	*12.06*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*12.06*	
26 05 33 13-1485	EA	4" Aluminum Bushing Set With Locknut	48.08	17.32
		For Work In Restricted Working Space, Add	*12.98*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*12.98*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1486	EA	5" Aluminum Bushing Set With Locknut	63.72	23.08
		For Work In Restricted Working Space, Add	*17.31*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*17.31*	
26 05 33 13-1487	EA	6" Aluminum Bushing Set With Locknut	94.82	34.62
		For Work In Restricted Working Space, Add	*25.97*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*25.97*	

26 05 33 13-1488 Schedule 40 Polyvinyl Chloride (PVC) Conduit *(26 05 33 13-0059)*

Note: Exposed installation, branch and feeder conduit. Excludes supporting strap, hanger and fastening.

26 05 33 13-1489 Schedule 40 Polyvinyl Chloride (PVC) Conduit With Glued Couplings *(26 05 33 13-1488)*

Note: Includes field bending conduit up to and including 1". See CSI section 26 05 33 13-2329 for field bending >1".

26 05 33 13-1490	LF	1/2" Schedule 40 Polyvinyl Chloride (PVC) Conduit With Coupled End	5.10	1.64
		For Schedule 60, Add	*0.45*	
		For Schedule 80, Add	*0.76*	
26 05 33 13-1491	LF	3/4" Schedule 40 Polyvinyl Chloride (PVC) Conduit With Coupled End	5.84	1.80
		For Schedule 60, Add	*0.56*	
		For Schedule 80, Add	*0.91*	
26 05 33 13-1492	LF	1" Schedule 40 Polyvinyl Chloride (PVC) Conduit With Coupled End	7.24	2.10
		For Schedule 60, Add	*0.76*	
		For Schedule 80, Add	*1.22*	
26 05 33 13-1493	LF	1-1/4" Schedule 40 Polyvinyl Chloride (PVC) Conduit With Coupled End	8.65	2.40
		For Schedule 60, Add	*0.96*	
		For Schedule 80, Add	*1.52*	
26 05 33 13-1494	LF	1-1/2" Schedule 40 Polyvinyl Chloride (PVC) Conduit With Coupled End	10.17	2.80
		For Schedule 60, Add	*1.14*	
		For Schedule 80, Add	*1.80*	
26 05 33 13-1495	LF	2" Schedule 40 Polyvinyl Chloride (PVC) Conduit With Coupled End	12.17	3.22
		For Schedule 60, Add	*1.44*	
		For Schedule 80, Add	*2.25*	
26 05 33 13-1496	LF	2-1/2" Schedule 40 Polyvinyl Chloride (PVC) Conduit With Coupled End	16.16	3.82
		For Schedule 60, Add	*2.13*	
		For Schedule 80, Add	*3.27*	
26 05 33 13-1497	LF	3" Schedule 40 Polyvinyl Chloride (PVC) Conduit With Coupled End	18.93	4.42
		For Schedule 60, Add	*2.52*	
		For Schedule 80, Add	*3.87*	
26 05 33 13-1498	LF	3-1/2" Schedule 40 Polyvinyl Chloride (PVC) Conduit With Coupled End	23.13	5.22
		For Schedule 60, Add	*3.17*	
		For Schedule 80, Add	*4.84*	
26 05 33 13-1499	LF	4" Schedule 40 Polyvinyl Chloride (PVC) Conduit With Coupled End	27.14	6.42
		For Schedule 60, Add	*3.57*	
		For Schedule 80, Add	*5.48*	
26 05 33 13-1500	LF	5" Schedule 40 Polyvinyl Chloride (PVC) Conduit With Coupled End	38.74	9.04
		For Schedule 60, Add	*5.17*	
		For Schedule 80, Add	*7.91*	
26 05 33 13-1501	LF	6" Schedule 40 Polyvinyl Chloride (PVC) Conduit With Coupled End	51.44	12.04
		For Schedule 60, Add	*6.84*	
		For Schedule 80, Add	*10.48*	

26 05 33 13-1502 Schedule 40 Polyvinyl Chloride (PVC) Conduit 90 Degree Elbows *(26 05 33 13-1488)*

See CSI section 26 05 33 13-2329 for conduit field bending.

26 05 33 13-1503	EA	1/2" Schedule 40 Polyvinyl Chloride (PVC) Conduit 90 Degree Elbow See CSI section 26 05 33 13-2329 for conduit field bending.	21.45	8.02
		For Schedule 60, Add	*1.35*	
		For Schedule 80, Add	*2.49*	
26 05 33 13-1504	EA	3/4" Schedule 40 Polyvinyl Chloride (PVC) Conduit 90 Degree Elbow See CSI section 26 05 33 13-2329 for conduit field bending.	23.74	8.84
		For Schedule 60, Add	*1.52*	
		For Schedule 80, Add	*2.79*	
26 05 33 13-1505	EA	1" Schedule 40 Polyvinyl Chloride (PVC) Conduit 90 Degree Elbow See CSI section 26 05 33 13-2329 for conduit field bending.	27.66	10.04
		For Schedule 60, Add	*1.90*	
		For Schedule 80, Add	*3.41*	
26 05 33 13-1506	EA	1-1/4" Schedule 40 Polyvinyl Chloride (PVC) Conduit 90 Degree Elbow See CSI section 26 05 33 13-2329 for conduit field bending.	35.84	12.84
		For Schedule 60, Add	*2.54*	
		For Schedule 80, Add	*4.51*	
26 05 33 13-1507	EA	1-1/2" Schedule 40 Polyvinyl Chloride (PVC) Conduit 90 Degree Elbow See CSI section 26 05 33 13-2329 for conduit field bending.	45.19	16.06
		For Schedule 60, Add	*3.27*	
		For Schedule 80, Add	*5.78*	
26 05 33 13-1508	EA	2" Schedule 40 Polyvinyl Chloride (PVC) Conduit 90 Degree Elbow See CSI section 26 05 33 13-2329 for conduit field bending.	57.20	20.08
		For Schedule 60, Add	*4.26*	
		For Schedule 80, Add	*7.48*	
26 05 33 13-1509	EA	2-1/2" Schedule 40 Polyvinyl Chloride (PVC) Conduit 90 Degree Elbow See CSI section 26 05 33 13-2329 for conduit field bending.	72.54	24.08
		For Schedule 60, Add	*6.09*	
		For Schedule 80, Add	*10.33*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1510	EA	3" Schedule 40 Polyvinyl Chloride (PVC) Conduit 90 Degree Elbow See CSI section 26 05 33 13-2329 for conduit field bending.	90.32	28.10
		For Schedule 60, Add	*8.53*	
		For Schedule 80, Add	*14.05*	
26 05 33 13-1511	EA	3-1/2" Schedule 40 Polyvinyl Chloride (PVC) Conduit 90 Degree Elbow See CSI section 26 05 33 13-2329 for conduit field bending.	113.15	34.12
		For Schedule 60, Add	*11.23*	
		For Schedule 80, Add	*18.28*	
26 05 33 13-1512	EA	4" Schedule 40 Polyvinyl Chloride (PVC) Conduit 90 Degree Elbow See CSI section 26 05 33 13-2329 for conduit field bending.	136.19	40.14
		For Schedule 60, Add	*13.98*	
		For Schedule 80, Add	*22.58*	
26 05 33 13-1513	EA	5" Schedule 40 Polyvinyl Chloride (PVC) Conduit 90 Degree Elbow See CSI section 26 05 33 13-2329 for conduit field bending.	188.76	50.18
		For Schedule 60, Add	*22.10*	
		For Schedule 80, Add	*34.71*	
26 05 33 13-1514	EA	6" Schedule 40 Polyvinyl Chloride (PVC) Conduit 90 Degree Elbow See CSI section 26 05 33 13-2329 for conduit field bending.	231.24	60.22
		For Schedule 60, Add	*27.70*	
		For Schedule 80, Add	*43.30*	
26 05 33 13-1515		**Schedule 40 Polyvinyl Chloride (PVC) Conduit 45 Degree Elbows** *(26 05 33 13-1488)* See CSI section 26 05 33 13-2329 for conduit field bending.		
26 05 33 13-1516	EA	1/2" Schedule 40 Polyvinyl Chloride (PVC) Conduit 45 Degree Elbow See CSI section 26 05 33 13-2329 for conduit field bending.	21.45	8.02
		For Schedule 60, Add	*1.35*	
		For Schedule 80, Add	*2.49*	
26 05 33 13-1517	EA	3/4" Schedule 40 Polyvinyl Chloride (PVC) Conduit 45 Degree Elbow See CSI section 26 05 33 13-2329 for conduit field bending.	23.64	8.84
		For Schedule 60, Add	*1.49*	
		For Schedule 80, Add	*2.75*	
26 05 33 13-1518	EA	1" Schedule 40 Polyvinyl Chloride (PVC) Conduit 45 Degree Elbow See CSI section 26 05 33 13-2329 for conduit field bending.	27.53	10.04
		For Schedule 60, Add	*1.87*	
		For Schedule 80, Add	*3.37*	
26 05 33 13-1519	EA	1-1/4" Schedule 40 Polyvinyl Chloride (PVC) Conduit 45 Degree Elbow See CSI section 26 05 33 13-2329 for conduit field bending.	35.45	12.84
		For Schedule 60, Add	*2.44*	
		For Schedule 80, Add	*4.38*	
26 05 33 13-1520	EA	1-1/2" Schedule 40 Polyvinyl Chloride (PVC) Conduit 45 Degree Elbow See CSI section 26 05 33 13-2329 for conduit field bending.	44.31	16.06
		For Schedule 60, Add	*3.05*	
		For Schedule 80, Add	*5.47*	
26 05 33 13-1521	EA	2" Schedule 40 Polyvinyl Chloride (PVC) Conduit 45 Degree Elbow See CSI section 26 05 33 13-2329 for conduit field bending.	56.73	20.08
		For Schedule 60, Add	*4.15*	
		For Schedule 80, Add	*7.31*	
26 05 33 13-1522	EA	2-1/2" Schedule 40 Polyvinyl Chloride (PVC) Conduit 45 Degree Elbow See CSI section 26 05 33 13-2329 for conduit field bending.	71.66	24.08
		For Schedule 60, Add	*5.87*	
		For Schedule 80, Add	*10.03*	
26 05 33 13-1523	EA	3" Schedule 40 Polyvinyl Chloride (PVC) Conduit 45 Degree Elbow See CSI section 26 05 33 13-2329 for conduit field bending.	89.20	28.10
		For Schedule 60, Add	*8.25*	
		For Schedule 80, Add	*13.66*	
26 05 33 13-1524	EA	3-1/2" Schedule 40 Polyvinyl Chloride (PVC) Conduit 45 Degree Elbow See CSI section 26 05 33 13-2329 for conduit field bending.	110.01	34.12
		For Schedule 60, Add	*10.44*	
		For Schedule 80, Add	*17.18*	
26 05 33 13-1525	EA	4" Schedule 40 Polyvinyl Chloride (PVC) Conduit 45 Degree Elbow See CSI section 26 05 33 13-2329 for conduit field bending.	133.49	40.14
		For Schedule 60, Add	*13.30*	
		For Schedule 80, Add	*21.63*	
26 05 33 13-1526	EA	5" Schedule 40 Polyvinyl Chloride (PVC) Conduit 45 Degree Elbow See CSI section 26 05 33 13-2329 for conduit field bending.	185.26	50.18
		For Schedule 60, Add	*21.23*	
		For Schedule 80, Add	*33.48*	
26 05 33 13-1527	EA	6" Schedule 40 Polyvinyl Chloride (PVC) Conduit 45 Degree Elbow See CSI section 26 05 33 13-2329 for conduit field bending.	220.82	60.22
		For Schedule 60, Add	*25.10*	
		For Schedule 80, Add	*39.65*	
26 05 33 13-1528		**Schedule 40 Polyvinyl Chloride (PVC) Conduit 18" Large Radius Elbow** *(26 05 33 13-1488)*		
26 05 33 13-1529	EA	1" Schedule 40, Polyvinyl Chloride (PVC), 18" Large Radius Elbow	103.82	25.45
		For Schedule 80, Add	*23.61*	
26 05 33 13-1530	EA	1-1/4" Schedule 40, Polyvinyl Chloride (PVC), 18" Large Radius Elbow	122.24	29.47
		For Schedule 80, Add	*28.05*	
26 05 33 13-1531	EA	1-1/2" Schedule 40, Polyvinyl Chloride (PVC), 18" Large Radius Elbow	138.19	33.49
		For Schedule 80, Add	*31.62*	
26 05 33 13-1532	EA	2" Schedule 40, Polyvinyl Chloride (PVC), 18" Large Radius Elbow	169.10	36.84
		For Schedule 80, Add	*40.77*	
26 05 33 13-1533	EA	2-1/2" Schedule 40, Polyvinyl Chloride (PVC), 18" Large Radius Elbow	225.99	46.22
		For Schedule 80, Add	*55.99*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1534	EA	3" Schedule 40, Polyvinyl Chloride (PVC), 18" Large Radius Elbow	290.96	62.96
		For Schedule 80, Add	*70.35*	
26 05 33 13-1535	EA	3-1/2" Schedule 40, Polyvinyl Chloride (PVC), 18" Large Radius Elbow	358.34	71.00
		For Schedule 80, Add	*89.92*	
26 05 33 13-1536	EA	4" Schedule 40, Polyvinyl Chloride (PVC), 18" Large Radius Elbow	416.88	92.43
		For Schedule 80, Add	*99.69*	
26 05 33 13-1537		**Schedule 40 Polyvinyl Chloride (PVC) Conduit 24" Large Radius Elbow** *(26 05 33 13-1488)*		
26 05 33 13-1538	EA	1" Schedule 40, Polyvinyl Chloride (PVC), 24" Large Radius Elbow	113.54	25.45
		For Schedule 80, Add	*27.01*	
26 05 33 13-1539	EA	1-1/4" Schedule 40, Polyvinyl Chloride (PVC), 24" Large Radius Elbow	145.62	29.47
		For Schedule 80, Add	*36.23*	
26 05 33 13-1540	EA	1-1/2" Schedule 40, Polyvinyl Chloride (PVC), 24" Large Radius Elbow	171.66	33.49
		For Schedule 80, Add	*43.34*	
26 05 33 13-1541	EA	2" Schedule 40, Polyvinyl Chloride (PVC), 24" Large Radius Elbow	185.67	36.84
		For Schedule 80, Add	*46.56*	
26 05 33 13-1542	EA	2-1/2" Schedule 40, Polyvinyl Chloride (PVC), 24" Large Radius Elbow	277.06	46.22
		For Schedule 80, Add	*73.86*	
26 05 33 13-1543	EA	3" Schedule 40, Polyvinyl Chloride (PVC), 24" Large Radius Elbow	365.22	62.96
		For Schedule 80, Add	*96.34*	
26 05 33 13-1544	EA	3-1/2" Schedule 40, Polyvinyl Chloride (PVC), 24" Large Radius Elbow	404.06	71.00
		For Schedule 80, Add	*105.92*	
26 05 33 13-1545	EA	4" Schedule 40, Polyvinyl Chloride (PVC), 24" Large Radius Elbow	472.23	92.43
		For Schedule 80, Add	*119.06*	
26 05 33 13-1546		**Schedule 40 Polyvinyl Chloride (PVC) Conduit 30" Large Radius Elbow** *(26 05 33 13-1488)*		
26 05 33 13-1547	EA	1" Schedule 40, Polyvinyl Chloride (PVC), 30" Large Radius Elbow	139.74	25.45
		For Schedule 80, Add	*36.18*	
26 05 33 13-1548	EA	1-1/4" Schedule 40, Polyvinyl Chloride (PVC), 30" Large Radius Elbow	156.60	29.47
		For Schedule 80, Add	*40.08*	
26 05 33 13-1549	EA	1-1/2" Schedule 40, Polyvinyl Chloride (PVC), 30" Large Radius Elbow	178.11	33.49
		For Schedule 80, Add	*45.59*	
26 05 33 13-1550	EA	2" Schedule 40, Polyvinyl Chloride (PVC), 30" Large Radius Elbow	216.91	36.84
		For Schedule 80, Add	*57.50*	
26 05 33 13-1551	EA	2-1/2" Schedule 40, Polyvinyl Chloride (PVC), 30" Large Radius Elbow	296.08	46.22
		For Schedule 80, Add	*80.52*	
26 05 33 13-1552	EA	3" Schedule 40, Polyvinyl Chloride (PVC), 30" Large Radius Elbow	381.18	62.96
		For Schedule 80, Add	*101.93*	
26 05 33 13-1553	EA	3-1/2" Schedule 40, Polyvinyl Chloride (PVC), 30" Large Radius Elbow	464.92	71.00
		For Schedule 80, Add	*127.22*	
26 05 33 13-1554	EA	4" Schedule 40, Polyvinyl Chloride (PVC), 30" Large Radius Elbow	526.89	92.43
		For Schedule 80, Add	*138.19*	
26 05 33 13-1555		**Schedule 40 Polyvinyl Chloride (PVC) Conduit 36" Large Radius Elbow** *(26 05 33 13-1488)*		
26 05 33 13-1556	EA	1" Schedule 40, Polyvinyl Chloride (PVC), 36" Large Radius Elbow	145.09	25.45
		For Schedule 80, Add	*38.05*	
26 05 33 13-1557	EA	1-1/4" Schedule 40, Polyvinyl Chloride (PVC), 36" Large Radius Elbow	189.08	29.47
		For Schedule 80, Add	*51.44*	
26 05 33 13-1558	EA	1-1/2" Schedule 40, Polyvinyl Chloride (PVC), 36" Large Radius Elbow	203.87	33.49
		For Schedule 80, Add	*54.61*	
26 05 33 13-1559	EA	2" Schedule 40, Polyvinyl Chloride (PVC), 36" Large Radius Elbow	218.07	36.84
		For Schedule 80, Add	*57.90*	
26 05 33 13-1560	EA	2-1/2" Schedule 40, Polyvinyl Chloride (PVC), 36" Large Radius Elbow	337.98	46.22
		For Schedule 80, Add	*95.19*	
26 05 33 13-1561	EA	3" Schedule 40, Polyvinyl Chloride (PVC), 36" Large Radius Elbow	475.08	62.96
		For Schedule 80, Add	*134.80*	
26 05 33 13-1562	EA	3-1/2" Schedule 40, Polyvinyl Chloride (PVC), 36" Large Radius Elbow	550.42	71.00
		For Schedule 80, Add	*157.14*	
26 05 33 13-1563	EA	4" Schedule 40, Polyvinyl Chloride (PVC), 36" Large Radius Elbow	628.15	92.43
		For Schedule 80, Add	*173.63*	
26 05 33 13-1564	EA	5" Schedule 40, Polyvinyl Chloride (PVC), 36" Large Radius Elbow	1,000.63	150.45
		For Schedule 80, Add	*274.87*	
26 05 33 13-1565	EA	6" Schedule 40, Polyvinyl Chloride (PVC), 36" Large Radius Elbow	1,455.75	226.71
		For Schedule 80, Add	*396.31*	
26 05 33 13-1566		**Schedule 40 Polyvinyl Chloride (PVC) Conduit 48" Large Radius Elbow** *(26 05 33 13-1488)*		
26 05 33 13-1567	EA	1" Schedule 40, Polyvinyl Chloride (PVC), 48" Large Radius Elbow	165.64	25.45
		For Schedule 80, Add	*45.25*	
26 05 33 13-1568	EA	1-1/4" Schedule 40, Polyvinyl Chloride (PVC), 48" Large Radius Elbow	194.58	29.47
		For Schedule 80, Add	*53.37*	
26 05 33 13-1569	EA	1-1/2" Schedule 40, Polyvinyl Chloride (PVC), 48" Large Radius Elbow	220.41	33.49
		For Schedule 80, Add	*60.40*	
26 05 33 13-1570	EA	2" Schedule 40, Polyvinyl Chloride (PVC), 48" Large Radius Elbow	275.17	36.84
		For Schedule 80, Add	*77.89*	
26 05 33 13-1571	EA	2-1/2" Schedule 40, Polyvinyl Chloride (PVC), 48" Large Radius Elbow	378.88	46.22
		For Schedule 80, Add	*109.50*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1572	EA	3" Schedule 40, Polyvinyl Chloride (PVC), 48" Large Radius Elbow	542.24	62.96
		For Schedule 80, Add	*158.30*	
26 05 33 13-1573	EA	3-1/2" Schedule 40, Polyvinyl Chloride (PVC), 48" Large Radius Elbow	614.63	71.00
		For Schedule 80, Add	*179.62*	
26 05 33 13-1574	EA	4" Schedule 40, Polyvinyl Chloride (PVC), 48" Large Radius Elbow	739.60	92.43
		For Schedule 80, Add	*212.64*	
26 05 33 13-1575	EA	5" Schedule 40, Polyvinyl Chloride (PVC), 48" Large Radius Elbow	1,065.83	150.45
		For Schedule 80, Add	*297.69*	
26 05 33 13-1576	EA	6" Schedule 40, Polyvinyl Chloride (PVC), 48" Large Radius Elbow	1,508.54	226.71
		For Schedule 80, Add	*414.79*	

26 05 33 13-1577 Polyvinyl Chloride (PVC) Conduit Female Adapters *(26 05 33 13-1488)*

26 05 33 13-1578	EA	1/2" Polyvinyl Chloride (PVC) Conduit Female Adapter	14.69	5.62
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.22*	
26 05 33 13-1579	EA	3/4" Polyvinyl Chloride (PVC) Conduit Female Adapter	16.92	6.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.82*	
26 05 33 13-1580	EA	1" Polyvinyl Chloride (PVC) Conduit Female Adapter	19.25	7.22
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 05 33 13-1581	EA	1-1/4" Polyvinyl Chloride (PVC) Conduit Female Adapter	21.71	8.02
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.02*	
26 05 33 13-1582	EA	1-1/2" Polyvinyl Chloride (PVC) Conduit Female Adapter	26.87	10.04
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.52*	
26 05 33 13-1583	EA	2" Polyvinyl Chloride (PVC) Conduit Female Adapter	32.66	12.04
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.03*	
26 05 33 13-1584	EA	2-1/2" Polyvinyl Chloride (PVC) Conduit Female Adapter	44.81	16.06
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*12.04*	
26 05 33 13-1585	EA	3" Polyvinyl Chloride (PVC) Conduit Female Adapter	56.52	20.08
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.05*	
26 05 33 13-1586	EA	3-1/2" Polyvinyl Chloride (PVC) Conduit Female Adapter	73.28	26.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*19.57*	
26 05 33 13-1587	EA	4" Polyvinyl Chloride (PVC) Conduit Female Adapter	88.70	32.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*24.08*	
26 05 33 13-1588	EA	5" Polyvinyl Chloride (PVC) Conduit Female Adapter	117.42	40.14
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*30.11*	
26 05 33 13-1589	EA	6" Polyvinyl Chloride (PVC) Conduit Female Adapter	146.04	50.18
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*37.63*	

26 05 33 13-1590 Polyvinyl Chloride (PVC) Conduit Bell Ends And Plug *(26 05 33 13-1488)*

26 05 33 13-1591	EA	1/2" Polyvinyl Chloride (PVC) Conduit Bell End And Plug	17.15	4.82
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.61*	
26 05 33 13-1592	EA	3/4" Polyvinyl Chloride (PVC) Conduit Bell End And Plug	19.54	5.62
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.22*	
26 05 33 13-1593	EA	1" Polyvinyl Chloride (PVC) Conduit Bell End And Plug	21.95	6.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.82*	
26 05 33 13-1594	EA	1-1/4" Polyvinyl Chloride (PVC) Conduit Bell End And Plug	26.14	7.22
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 05 33 13-1595	EA	1-1/2" Polyvinyl Chloride (PVC) Conduit Bell End And Plug	29.17	8.02
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.02*	
26 05 33 13-1596	EA	2" Polyvinyl Chloride (PVC) Conduit Bell End And Plug	35.07	9.24
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.92*	
26 05 33 13-1597	EA	2-1/2" Polyvinyl Chloride (PVC) Conduit Bell End And Plug	39.25	10.44
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.83*	
26 05 33 13-1598	EA	3" Polyvinyl Chloride (PVC) Conduit Bell End And Plug	44.41	12.04
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.03*	
26 05 33 13-1599	EA	3-1/2" Polyvinyl Chloride (PVC) Conduit Bell End And Plug	52.62	14.06
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.54*	
26 05 33 13-1600	EA	4" Polyvinyl Chloride (PVC) Conduit Bell End And Plug	58.06	16.06
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*12.04*	
26 05 33 13-1601	EA	5" Polyvinyl Chloride (PVC) Conduit Bell End And Plug	73.77	18.06
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.55*	
26 05 33 13-1602	EA	6" Polyvinyl Chloride (PVC) Conduit Bell End And Plug	83.07	20.08
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.05*	

26 05 33 13-1603 Polyvinyl Chloride (PVC) Conduit Terminal Adapters *(26 05 33 13-1488)*

26 05 33 13-1604	EA	1/2" Polyvinyl Chloride (PVC) Conduit Male Terminal Adapter	15.97	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.63*	
26 05 33 13-1605	EA	3/4" Polyvinyl Chloride (PVC) Conduit Male Terminal Adapter	19.36	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.55*	
26 05 33 13-1606	EA	1" Polyvinyl Chloride (PVC) Conduit Male Terminal Adapter	21.60	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.17*	
26 05 33 13-1607	EA	1-1/4" Polyvinyl Chloride (PVC) Conduit Male Terminal Adapter	24.28	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.87*	
26 05 33 13-1608	EA	1-1/2" Polyvinyl Chloride (PVC) Conduit Male Terminal Adapter	26.65	10.04
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.52*	
26 05 33 13-1609	EA	2" Polyvinyl Chloride (PVC) Conduit Male Terminal Adapter	32.36	12.04
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.03*	
26 05 33 13-1610	EA	2-1/2" Polyvinyl Chloride (PVC) Conduit Male Terminal Adapter	44.21	16.06
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*12.04*	
26 05 33 13-1611	EA	3" Polyvinyl Chloride (PVC) Conduit Male Terminal Adapter	55.69	20.08
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.05*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1612	EA	3-1/2" Polyvinyl Chloride (PVC) Conduit Male Terminal Adapter	72.21	26.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*19.57*	
26 05 33 13-1613	EA	4" Polyvinyl Chloride (PVC) Conduit Male Terminal Adapter	87.61	32.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*24.08*	
26 05 33 13-1614	EA	5" Polyvinyl Chloride (PVC) Conduit Male Terminal Adapter	115.26	40.14
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*30.11*	
26 05 33 13-1615	EA	6" Polyvinyl Chloride (PVC) Conduit Male Terminal Adapter	143.45	50.18
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*37.63*	

26 05 33 13-1616 Polyvinyl Chloride (PVC) Type C, LB, LR Or LL, Two Hub Conduit Body With Cover *(26 05 33 13-1488)*

26 05 33 13-1617	EA	1/2" Polyvinyl Chloride (PVC) Type C, LB, LR Or LL, Two Hub Conduit Body With Cover	45.98	16.06
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*12.04*	
26 05 33 13-1618	EA	3/4" Polyvinyl Chloride (PVC) Type C, LB, LR Or LL, Two Hub Conduit Body With Cover	53.42	18.06
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.55*	
26 05 33 13-1619	EA	1" Polyvinyl Chloride (PVC) Type C, LB, LR Or LL, Two Hub Conduit Body With Cover	59.34	20.08
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.05*	
26 05 33 13-1620	EA	1-1/4" Polyvinyl Chloride (PVC) Type C, LB, LR Or LL, Two Hub Conduit Body With Cover	73.29	24.08
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*18.07*	
26 05 33 13-1621	EA	1-1/2" Polyvinyl Chloride (PVC) Type C, LB, LR Or LL, Two Hub Conduit Body With Cover	90.58	30.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*22.58*	
26 05 33 13-1622	EA	2" Polyvinyl Chloride (PVC) Type C, LB, LR Or LL, Two Hub Conduit Body With Cover	117.48	36.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.10*	
26 05 33 13-1623	EA	2-1/2" Polyvinyl Chloride (PVC) Type C, LB, LR Or LL, Two Hub Conduit Body With Cover	201.85	40.14
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*30.11*	
26 05 33 13-1624	EA	3" Polyvinyl Chloride (PVC) Type C, LB, LR Or LL, Two Hub Conduit Body With Cover	215.44	44.16
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*33.12*	
26 05 33 13-1625	EA	3-1/2" Polyvinyl Chloride (PVC) Type C, LB, LR Or LL, Two Hub Conduit Body With Cover	234.03	50.18
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*37.63*	
26 05 33 13-1626	EA	4" Polyvinyl Chloride (PVC) Type C, LB, LR Or LL, Two Hub Conduit Body With Cover	261.24	58.20
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*43.66*	

26 05 33 13-1627 Polyvinyl Chloride (PVC) Type T, Three Hub Conduit Body With Cover *(26 05 33 13-1488)*

26 05 33 13-1628	EA	1/2" Polyvinyl Chloride (PVC) Type T, Three Hub Conduit Body With Cover	59.29	20.61
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.46*	
26 05 33 13-1629	EA	3/4" Polyvinyl Chloride (PVC) Type T, Three Hub Conduit Body With Cover	66.43	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*17.00*	
26 05 33 13-1630	EA	1" Polyvinyl Chloride (PVC) Type T, Three Hub Conduit Body With Cover	71.82	24.73
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*18.55*	
26 05 33 13-1631	EA	1-1/4" Polyvinyl Chloride (PVC) Type T, Three Hub Conduit Body With Cover	90.15	28.86
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.64*	
26 05 33 13-1632	EA	1-1/2" Polyvinyl Chloride (PVC) Type T, Three Hub Conduit Body With Cover	108.88	35.04
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*26.28*	
26 05 33 13-1633	EA	2" Polyvinyl Chloride (PVC) Type T, Three Hub Conduit Body With Cover	134.21	41.22
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*30.92*	

26 05 33 13-1634 Polyvinyl Chloride (PVC) Conduit Expansion Joint *(26 05 33 13-1488)*

26 05 33 13-1635	EA	1/2" Polyvinyl Chloride (PVC) Conduit Expansion Joint	99.92	20.08
26 05 33 13-1636	EA	3/4" Polyvinyl Chloride (PVC) Conduit Expansion Joint	111.22	24.08
26 05 33 13-1637	EA	1" Polyvinyl Chloride (PVC) Conduit Expansion Joint	123.28	28.10
26 05 33 13-1638	EA	1-1/4" Polyvinyl Chloride (PVC) Conduit Expansion Joint	134.58	32.12
26 05 33 13-1639	EA	1-1/2" Polyvinyl Chloride (PVC) Conduit Expansion Joint	145.60	36.12
26 05 33 13-1640	EA	2" Polyvinyl Chloride (PVC) Conduit Expansion Joint	159.04	40.14
26 05 33 13-1641	EA	2-1/2" Polyvinyl Chloride (PVC) Conduit Expansion Joint	194.73	46.16
26 05 33 13-1642	EA	3" Polyvinyl Chloride (PVC) Conduit Expansion Joint	233.36	52.18
26 05 33 13-1643	EA	3-1/2" Polyvinyl Chloride (PVC) Conduit Expansion Joint	273.19	60.22
26 05 33 13-1644	EA	4" Polyvinyl Chloride (PVC) Conduit Expansion Joint	325.04	70.26
26 05 33 13-1645	EA	5" Polyvinyl Chloride (PVC) Conduit Expansion Joint	430.41	84.30
26 05 33 13-1646	EA	6" Polyvinyl Chloride (PVC) Conduit Expansion Joint	565.99	108.38

26 05 33 13-1647 Polyvinyl Chloride (PVC) Conduit End Caps *(26 05 33 13-1488)*

26 05 33 13-1648	EA	1/2" Polyvinyl Chloride (PVC) Conduit End Cap	12.66	4.02
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.01*	
26 05 33 13-1649	EA	3/4" Polyvinyl Chloride (PVC) Conduit End Cap	14.96	4.82
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.61*	
26 05 33 13-1650	EA	1" Polyvinyl Chloride (PVC) Conduit End Cap	17.22	5.62
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.22*	
26 05 33 13-1651	EA	1-1/4" Polyvinyl Chloride (PVC) Conduit End Cap	20.61	6.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.82*	
26 05 33 13-1652	EA	1-1/2" Polyvinyl Chloride (PVC) Conduit End Cap	24.04	7.22
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 05 33 13-1653	EA	2" Polyvinyl Chloride (PVC) Conduit End Cap	28.46	8.02
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.02*	
26 05 33 13-1654	EA	2-1/2" Polyvinyl Chloride (PVC) Conduit End Cap	40.76	9.24
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.92*	
26 05 33 13-1655	EA	3" Polyvinyl Chloride (PVC) Conduit End Cap	44.64	10.44
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.83*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1656	EA	3-1/2" Polyvinyl Chloride (PVC) Conduit End Cap	57.16	11.64
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.73*	
26 05 33 13-1657	EA	4" Polyvinyl Chloride (PVC) Conduit End Cap	69.29	12.44
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.34*	
26 05 33 13-1658	EA	5" Polyvinyl Chloride (PVC) Conduit End Cap	80.73	14.06
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.54*	
26 05 33 13-1659	EA	6" Polyvinyl Chloride (PVC) Conduit End Cap	102.26	16.06
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*12.04*	

26 05 33 13-1660 Polyvinyl Chloride (PVC) Type LB Telecommunications Conduit Bodies With Cover (Smart Pathways) *(26 05 33 13-1488)*

26 05 33 13-1661	EA	2" Polyvinyl Chloride (PVC) Type LB Telecommunications Conduit Body With Cover (Smart Pathways EZLB200)	130.17	36.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.10*	
26 05 33 13-1662	EA	3/4" To 1-1/4" Polyvinyl Chloride (PVC) Type LB Telecommunications Conduit Body With Cover (Smart Pathways KBLB121)	140.69	24.08
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*18.07*	
26 05 33 13-1663	EA	1-1/2" To 2-1/2" Polyvinyl Chloride (PVC) Type LB Telecommunications Conduit Body With Cover (Smart Pathways KBLB251)	347.03	40.14
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*30.11*	
26 05 33 13-1664	EA	3" To 4" Polyvinyl Chloride (PVC) Type LB Telecommunications Conduit Body With Cover (Smart Pathways KBLB401)	682.26	58.20
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*43.66*	

26 05 33 13-1665 Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit *(26 05 33 13-0059)*

Note: Exposed installation. Excludes supporting strap, hanger and fastening.

26 05 33 13-1666 Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit *(26 05 33 13-1665)*

Note: Includes field bending conduit up to and including 1".

26 05 33 13-1667	LF	1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit	8.62	1.64
26 05 33 13-1668	LF	3/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit	9.59	1.80
26 05 33 13-1669	LF	1" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit	10.63	2.08
26 05 33 13-1670	LF	1-1/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit	11.68	2.40
26 05 33 13-1671	LF	1-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit	13.14	2.80
26 05 33 13-1672	LF	2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit	14.30	3.22
26 05 33 13-1673	LF	2-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit	17.06	3.82
26 05 33 13-1674	LF	3" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit	20.07	4.42
26 05 33 13-1675	LF	3-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit	23.19	5.22
26 05 33 13-1676	LF	4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit	27.34	6.42
26 05 33 13-1677	LF	5" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit	36.67	9.04
26 05 33 13-1678	LF	6" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit	47.73	12.04

26 05 33 13-1679 Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 90 Degree Elbows, 12" Large Radius Elbows *(26 05 33 13-1665)*

26 05 33 13-1680	EA	1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 90 Degree Elbow, 12" Large Radius Elbows	103.36	8.02
		For 24" Radius, Add	*7.25*	
		For 36" Radius, Add	*10.34*	
		For 48" Radius, Add	*13.42*	
26 05 33 13-1681	EA	3/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 90 Degree Elbow, 12" Large Radius Elbows	115.31	8.84
		For 24" Radius, Add	*8.10*	
		For 36" Radius, Add	*11.53*	
		For 48" Radius, Add	*14.97*	
26 05 33 13-1682	EA	1" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 90 Degree Elbow, 12" Large Radius Elbows	119.26	10.04
		For 24" Radius, Add	*8.32*	
		For 36" Radius, Add	*11.93*	
		For 48" Radius, Add	*15.53*	
26 05 33 13-1683	EA	1-1/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 90 Degree Elbow, 12" Large Radius Elbows	127.22	12.84
		For 24" Radius, Add	*8.74*	
		For 36" Radius, Add	*12.72*	
		For 48" Radius, Add	*16.71*	
26 05 33 13-1684	EA	1-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 90 Degree Elbow, 12" Large Radius Elbows	136.18	16.06
		For 24" Radius, Add	*9.21*	
		For 36" Radius, Add	*13.62*	
		For 48" Radius, Add	*18.03*	
26 05 33 13-1685	EA	2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 90 Degree Elbow, 12" Large Radius Elbows	159.47	20.08
		For 24" Radius, Add	*10.71*	
		For 36" Radius, Add	*15.95*	
		For 48" Radius, Add	*21.19*	
26 05 33 13-1686	EA	2-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 90 Degree Elbow, 12" Large Radius Elbows	191.03	24.08
		For 24" Radius, Add	*12.82*	
		For 36" Radius, Add	*19.10*	
		For 48" Radius, Add	*25.38*	
26 05 33 13-1687	EA	3" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 90 Degree Elbow, 12" Large Radius Elbows	227.23	28.10
		For 24" Radius, Add	*15.29*	
		For 36" Radius, Add	*22.72*	
		For 48" Radius, Add	*30.16*	

copyright 2026 The Gordian Group, Inc.

	MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1688		EA	3-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 90 Degree Elbow, 12" Large Radius Elbows	261.89	34.12
			For 24" Radius, Add	*17.51*	
			For 36" Radius, Add	*26.19*	
			For 48" Radius, Add	*34.87*	
26 05 33 13-1689		EA	4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 90 Degree Elbow, 12" Large Radius Elbows	296.57	40.14
			For 24" Radius, Add	*19.73*	
			For 36" Radius, Add	*29.66*	
			For 48" Radius, Add	*39.58*	
26 05 33 13-1690		EA	5" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 90 Degree Elbow, 12" Large Radius Elbows	370.71	50.18
			For 24" Radius, Add	*24.67*	
			For 36" Radius, Add	*37.07*	
			For 48" Radius, Add	*49.47*	
26 05 33 13-1691		EA	6" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 90 Degree Elbow, 12" Large Radius Elbows	457.12	60.22
			For 24" Radius, Add	*30.52*	
			For 36" Radius, Add	*45.71*	
			For 48" Radius, Add	*60.90*	

26 05 33 13-1692 Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 45 Degree Elbows, 12" Large Radius Elbows *(26 05 33 13-1665)*

26 05 33 13-1693		EA	1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 45 Degree Elbow, 12" Large Radius Elbows	88.37	8.02
			For 24" Radius, Add	*6.13*	
			For 36" Radius, Add	*8.84*	
			For 48" Radius, Add	*11.55*	
26 05 33 13-1694		EA	3/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 45 Degree Elbow, 12" Large Radius Elbows	98.53	8.84
			For 24" Radius, Add	*6.84*	
			For 36" Radius, Add	*9.85*	
			For 48" Radius, Add	*12.87*	
26 05 33 13-1695		EA	1" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 45 Degree Elbow, 12" Large Radius Elbows	102.31	10.04
			For 24" Radius, Add	*7.05*	
			For 36" Radius, Add	*10.23*	
			For 48" Radius, Add	*13.42*	
26 05 33 13-1696		EA	1-1/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 45 Degree Elbow, 12" Large Radius Elbows	110.10	12.84
			For 24" Radius, Add	*7.45*	
			For 36" Radius, Add	*11.01*	
			For 48" Radius, Add	*14.57*	
26 05 33 13-1697		EA	1-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 45 Degree Elbow, 12" Large Radius Elbows	118.90	16.06
			For 24" Radius, Add	*7.91*	
			For 36" Radius, Add	*11.89*	
			For 48" Radius, Add	*15.87*	
26 05 33 13-1698		EA	2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 45 Degree Elbow, 12" Large Radius Elbows	139.80	20.08
			For 24" Radius, Add	*9.23*	
			For 36" Radius, Add	*13.98*	
			For 48" Radius, Add	*18.73*	
26 05 33 13-1699		EA	2-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 45 Degree Elbow, 12" Large Radius Elbows	167.48	24.08
			For 24" Radius, Add	*11.06*	
			For 36" Radius, Add	*16.75*	
			For 48" Radius, Add	*22.44*	
26 05 33 13-1700		EA	3" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 45 Degree Elbow, 12" Large Radius Elbows	198.98	28.10
			For 24" Radius, Add	*13.17*	
			For 36" Radius, Add	*19.90*	
			For 48" Radius, Add	*26.63*	
26 05 33 13-1701		EA	3-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 45 Degree Elbow, 12" Large Radius Elbows	230.11	34.12
			For 24" Radius, Add	*15.13*	
			For 36" Radius, Add	*23.01*	
			For 48" Radius, Add	*30.90*	
26 05 33 13-1702		EA	4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 45 Degree Elbow, 12" Large Radius Elbows	261.26	40.14
			For 24" Radius, Add	*17.09*	
			For 36" Radius, Add	*26.13*	
			For 48" Radius, Add	*35.17*	
26 05 33 13-1703		EA	5" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 45 Degree Elbow, 12" Large Radius Elbows	326.56	50.18
			For 24" Radius, Add	*21.36*	
			For 36" Radius, Add	*32.66*	
			For 48" Radius, Add	*43.96*	
26 05 33 13-1704		EA	6" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 45 Degree Elbow, 12" Large Radius Elbows	401.94	60.22
			For 24" Radius, Add	*26.38*	
			For 36" Radius, Add	*40.19*	
			For 48" Radius, Add	*54.01*	

26 05 33 13-1705 Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 30 Degree Elbows, 12" Large Radius Elbows *(26 05 33 13-1665)*

26 05 33 13-1706		EA	1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 30 Degree Elbow, 12" Large Radius Elbows	82.18	7.22
			For 24" Radius, Add	*5.71*	
			For 36" Radius, Add	*8.22*	
			For 48" Radius, Add	*10.72*	
26 05 33 13-1707		EA	3/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 30 Degree Elbow, 12" Large Radius Elbows	91.67	7.94
			For 24" Radius, Add	*6.38*	
			For 36" Radius, Add	*9.17*	
			For 48" Radius, Add	*11.96*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1708	EA	1" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 30 Degree Elbow, 12" Large Radius Elbows	95.10	9.04
		For 24" Radius, Add	*6.57*	
		For 36" Radius, Add	*9.51*	
		For 48" Radius, Add	*12.45*	
26 05 33 13-1709	EA	1-1/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 30 Degree Elbow, 12" Large Radius Elbows	102.13	11.56
		For 24" Radius, Add	*6.94*	
		For 36" Radius, Add	*10.21*	
		For 48" Radius, Add	*13.49*	
26 05 33 13-1710	EA	1-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 30 Degree Elbow, 12" Large Radius Elbows	110.07	14.46
		For 24" Radius, Add	*7.35*	
		For 36" Radius, Add	*11.01*	
		For 48" Radius, Add	*14.66*	
26 05 33 13-1711	EA	2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 30 Degree Elbow, 12" Large Radius Elbows	129.31	18.06
		For 24" Radius, Add	*8.57*	
		For 36" Radius, Add	*12.93*	
		For 48" Radius, Add	*17.29*	
26 05 33 13-1712	EA	2-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 30 Degree Elbow, 12" Large Radius Elbows	154.92	21.68
		For 24" Radius, Add	*10.26*	
		For 36" Radius, Add	*15.49*	
		For 48" Radius, Add	*20.72*	
26 05 33 13-1713	EA	3" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 30 Degree Elbow, 12" Large Radius Elbows	184.09	25.30
		For 24" Radius, Add	*12.23*	
		For 36" Radius, Add	*18.41*	
		For 48" Radius, Add	*24.59*	
26 05 33 13-1714	EA	3-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 30 Degree Elbow, 12" Large Radius Elbows	212.76	30.70
		For 24" Radius, Add	*14.04*	
		For 36" Radius, Add	*21.28*	
		For 48" Radius, Add	*28.51*	
26 05 33 13-1715	EA	4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 30 Degree Elbow, 12" Large Radius Elbows	241.40	36.12
		For 24" Radius, Add	*15.85*	
		For 36" Radius, Add	*24.14*	
		For 48" Radius, Add	*32.43*	
26 05 33 13-1716	EA	5" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 30 Degree Elbow, 12" Large Radius Elbows	301.76	45.16
		For 24" Radius, Add	*19.81*	
		For 36" Radius, Add	*30.18*	
		For 48" Radius, Add	*40.54*	
26 05 33 13-1717	EA	6" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 30 Degree Elbow, 12" Large Radius Elbows	371.55	54.20
		For 24" Radius, Add	*24.48*	
		For 36" Radius, Add	*37.16*	
		For 48" Radius, Add	*49.83*	

26 05 33 13-1718 Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 22-1/2 Degree Elbows, 12" Large Radius Elbows *(26 05 33 13-1665)*

26 05 33 13-1719	EA	1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 22-1/2 Degree Elbow, 12" Large Radius Elbows	78.02	7.22
		For 24" Radius, Add	*5.40*	
		For 36" Radius, Add	*7.80*	
		For 48" Radius, Add	*10.20*	
26 05 33 13-1720	EA	3/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 22-1/2 Degree Elbow, 12" Large Radius Elbows	87.01	7.94
		For 24" Radius, Add	*6.03*	
		For 36" Radius, Add	*8.70*	
		For 48" Radius, Add	*11.37*	
26 05 33 13-1721	EA	1" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 22-1/2 Degree Elbow, 12" Large Radius Elbows	90.39	9.04
		For 24" Radius, Add	*6.21*	
		For 36" Radius, Add	*9.04*	
		For 48" Radius, Add	*11.86*	
26 05 33 13-1722	EA	1-1/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 22-1/2 Degree Elbow, 12" Large Radius Elbows	97.37	11.56
		For 24" Radius, Add	*6.58*	
		For 36" Radius, Add	*9.74*	
		For 48" Radius, Add	*12.89*	
26 05 33 13-1723	EA	1-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 22-1/2 Degree Elbow, 12" Large Radius Elbows	105.27	14.46
		For 24" Radius, Add	*6.99*	
		For 36" Radius, Add	*10.53*	
		For 48" Radius, Add	*14.06*	
26 05 33 13-1724	EA	2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 22-1/2 Degree Elbow, 12" Large Radius Elbows	123.85	18.06
		For 24" Radius, Add	*8.16*	
		For 36" Radius, Add	*12.39*	
		For 48" Radius, Add	*16.61*	
26 05 33 13-1725	EA	2-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 22-1/2 Degree Elbow, 12" Large Radius Elbows	148.38	21.68
		For 24" Radius, Add	*9.77*	
		For 36" Radius, Add	*14.84*	
		For 48" Radius, Add	*19.90*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1726	EA	3" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 22-1/2 Degree Elbow, 12" Large Radius Elbows	176.24	25.30
		For 24" Radius, Add	*11.64*	
		For 36" Radius, Add	*17.62*	
		For 48" Radius, Add	*23.61*	
26 05 33 13-1727	EA	3-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 22-1/2 Degree Elbow, 12" Large Radius Elbows	203.93	30.70
		For 24" Radius, Add	*13.38*	
		For 36" Radius, Add	*20.39*	
		For 48" Radius, Add	*27.41*	
26 05 33 13-1728	EA	4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 22-1/2 Degree Elbow, 12" Large Radius Elbows	231.59	36.12
		For 24" Radius, Add	*15.11*	
		For 36" Radius, Add	*23.16*	
		For 48" Radius, Add	*31.21*	
26 05 33 13-1729	EA	5" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 22-1/2 Degree Elbow, 12" Large Radius Elbows	289.49	45.16
		For 24" Radius, Add	*18.89*	
		For 36" Radius, Add	*28.95*	
		For 48" Radius, Add	*39.01*	
26 05 33 13-1730	EA	6" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 22-1/2 Degree Elbow, 12" Large Radius Elbows	356.22	54.20
		For 24" Radius, Add	*23.33*	
		For 36" Radius, Add	*35.62*	
		For 48" Radius, Add	*47.91*	

26 05 33 13-1731 Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Double Bell Couplings *(26 05 33 13-1665)*

26 05 33 13-1732	EA	1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Double Bell Coupling	48.54	5.62
26 05 33 13-1733	EA	3/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Double Bell Coupling	54.48	6.42
26 05 33 13-1734	EA	1" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Double Bell Coupling	56.88	7.22
26 05 33 13-1735	EA	1-1/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Double Bell Coupling	59.22	8.02
26 05 33 13-1736	EA	1-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Double Bell Coupling	65.01	10.04
26 05 33 13-1737	EA	2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Double Bell Coupling	77.65	12.04
26 05 33 13-1738	EA	2-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Double Bell Coupling	97.37	16.06
26 05 33 13-1739	EA	3" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Double Bell Coupling	118.85	20.08
26 05 33 13-1740	EA	3-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Double Bell Coupling	142.50	26.10
26 05 33 13-1741	EA	4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Double Bell Coupling	166.13	32.12
26 05 33 13-1742	EA	5" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Double Bell Coupling	207.66	40.14
26 05 33 13-1743	EA	6" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Double Bell Coupling	259.52	50.18

26 05 33 13-1744 Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Radius Double Bell Couplings *(26 05 33 13-1665)*

26 05 33 13-1745	EA	1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Radius Double Bell Coupling	33.51	5.62
26 05 33 13-1746	EA	3/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Radius Double Bell Coupling	37.68	6.42
26 05 33 13-1747	EA	1" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Radius Double Bell Coupling	39.91	7.22
26 05 33 13-1748	EA	1-1/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Radius Double Bell Coupling	42.16	8.02
26 05 33 13-1749	EA	1-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Radius Double Bell Coupling	47.38	10.04
26 05 33 13-1750	EA	2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Radius Double Bell Coupling	52.53	12.04
26 05 33 13-1751	EA	2-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Radius Double Bell Coupling	67.06	16.06
26 05 33 13-1752	EA	3" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Radius Double Bell Coupling	82.49	20.08
26 05 33 13-1753	EA	3-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Radius Double Bell Coupling	101.59	26.10
26 05 33 13-1754	EA	4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Radius Double Bell Coupling	120.67	32.12
26 05 33 13-1755	EA	5" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Radius Double Bell Coupling	150.89	40.14
26 05 33 13-1756	EA	6" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Radius Double Bell Coupling	188.55	50.18

26 05 33 13-1757 Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Sleeve Couplings *(26 05 33 13-1665)*

26 05 33 13-1758	EA	1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Sleeve Coupling	38.24	4.62
26 05 33 13-1759	EA	3/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Sleeve Coupling	42.94	6.42
26 05 33 13-1760	EA	1" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Sleeve Coupling	45.24	7.22
26 05 33 13-1761	EA	1-1/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Sleeve Coupling	47.42	8.02
26 05 33 13-1762	EA	1-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Sleeve Coupling	53.04	10.04
26 05 33 13-1763	EA	2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Sleeve Coupling	63.39	12.04
26 05 33 13-1764	EA	2-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Sleeve Coupling	80.07	16.06
26 05 33 13-1765	EA	3" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Sleeve Coupling	98.09	20.08
26 05 33 13-1766	EA	3-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Sleeve Coupling	119.13	26.10
26 05 33 13-1767	EA	4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Sleeve Coupling	140.16	32.12
26 05 33 13-1768	EA	5" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Sleeve Coupling	175.18	40.14
26 05 33 13-1769	EA	6" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Sleeve Coupling	219.00	50.18

26 05 33 13-1770 Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Expansion Joints *(26 05 33 13-1665)*

26 05 33 13-1771	EA	1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Expansion Joint	76.83	20.08
26 05 33 13-1772	EA	3/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Expansion Joint	89.78	24.08
26 05 33 13-1773	EA	1" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Expansion Joint	100.15	28.10
26 05 33 13-1774	EA	1-1/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Expansion Joint	110.37	32.12

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1775	EA	1-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Expansion Joint	121.09	36.12
26 05 33 13-1776	EA	2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Expansion Joint	136.99	40.14
26 05 33 13-1777	EA	2-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Expansion Joint	159.37	46.16
26 05 33 13-1778	EA	3" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Expansion Joint	183.21	52.18
26 05 33 13-1779	EA	3-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Expansion Joint	209.88	60.22
26 05 33 13-1780	EA	4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Expansion Joint	241.55	70.26
26 05 33 13-1781	EA	5" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Expansion Joint	283.13	80.28
26 05 33 13-1782	EA	6" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Expansion Joint	328.81	90.32
26 05 33 13-1783		**Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion Joints** *(26 05 33 13-1665)*		
26 05 33 13-1784	EA	1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion Joint	87.65	20.08
26 05 33 13-1785	EA	3/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion Joint	101.92	24.08
26 05 33 13-1786	EA	1" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion Joint	112.35	28.10
26 05 33 13-1787	EA	1-1/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion Joint	122.69	32.12
26 05 33 13-1788	EA	1-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion Joint	133.52	36.12
26 05 33 13-1789	EA	2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion Joint	151.18	40.14
26 05 33 13-1790	EA	2-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion Joint	176.41	46.16
26 05 33 13-1791	EA	3" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion Joint	203.65	52.18
26 05 33 13-1792	EA	3-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion Joint	232.88	60.22
26 05 33 13-1793	EA	4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion Joint	267.12	70.26
26 05 33 13-1794	EA	5" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion Joint	315.18	80.28
26 05 33 13-1795	EA	6" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion Joint	368.87	90.32
26 05 33 13-1796		**Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Adapters** *(26 05 33 13-1665)*		
26 05 33 13-1797	EA	1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Adapter	103.17	5.62
26 05 33 13-1798	EA	3/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Adapter	115.05	6.42
26 05 33 13-1799	EA	1" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Adapter	120.09	7.22
26 05 33 13-1800	EA	1-1/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Adapter	125.28	8.02
26 05 33 13-1801	EA	1-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Adapter	131.92	10.04
26 05 33 13-1802	EA	2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Adapter	147.11	12.04
26 05 33 13-1803	EA	2-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Adapter	180.56	16.06
26 05 33 13-1804	EA	3" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Adapter	218.60	20.08
26 05 33 13-1805	EA	3-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Adapter	254.72	26.10
26 05 33 13-1806	EA	4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Adapter	290.82	32.12
26 05 33 13-1807	EA	5" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Adapter	363.61	40.14
26 05 33 13-1808	EA	6" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Adapter	452.46	50.18
26 05 33 13-1809		**Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion/Deflection Joints** *(26 05 33 13-1665)*		
26 05 33 13-1810	EA	1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion/Deflection Joint	106.48	20.08
26 05 33 13-1811	EA	3/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion/Deflection Joint	122.78	24.08
26 05 33 13-1812	EA	1" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion/Deflection Joint	147.54	28.10
26 05 33 13-1813	EA	1-1/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion/Deflection Joint	184.48	32.12
26 05 33 13-1814	EA	1-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion/Deflection Joint	233.16	36.12
26 05 33 13-1815	EA	2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion/Deflection Joint	312.05	40.14
26 05 33 13-1816	EA	2-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion/Deflection Joint	448.53	46.16
26 05 33 13-1817	EA	3" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion/Deflection Joint	543.51	52.18
26 05 33 13-1818	EA	3-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion/Deflection Joint	658.53	60.22
26 05 33 13-1819	EA	4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion/Deflection Joint	778.55	70.26
26 05 33 13-1820	EA	5" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion/Deflection Joint	916.90	80.28
26 05 33 13-1821	EA	6" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion/Deflection Joint	1,441.64	90.32
26 05 33 13-1822		**Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Type LB, LR Or LL, Two Hub Conduit Body And Cover** *(26 05 33 13-1665)*		
26 05 33 13-1823	EA	1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Type LB, LR Or LL, Two Hub Conduit Body And Cover	89.97	16.06
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*12.04*	
26 05 33 13-1824	EA	3/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Type LB, LR Or LL, Two Hub Conduit Body And Cover	104.59	18.06
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.55*	
26 05 33 13-1825	EA	1" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Type LB, LR Or LL, Two Hub Conduit Body And Cover	140.79	20.08
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.05*	
26 05 33 13-1826	EA	1-1/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Type LB, LR Or LL, Two Hub Conduit Body And Cover	172.14	24.08
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*18.07*	
26 05 33 13-1827	EA	1-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Type LB, LR Or LL, Two Hub Conduit Body And Cover	219.16	30.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*22.58*	
26 05 33 13-1828	EA	2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Type LB, LR Or LL, Two Hub Conduit Body And Cover	303.51	36.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.10*	
26 05 33 13-1829	EA	2-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Type LB, LR Or LL, Two Hub Conduit Body And Cover	505.11	42.16
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*31.61*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1830	EA	3" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Type LB, LR Or LL, Two Hub Conduit Body And Cover	653.41	48.18
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*36.13*	
26 05 33 13-1831	EA	3-1/2" Type LB, LR Or LL, Two Hub Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Body And Cover	786.73	56.20
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*42.15*	
26 05 33 13-1832	EA	4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Type LB, LR Or LL, Two Hub Conduit Body And Cover	920.07	64.22
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*48.17*	
26 05 33 13-1833	EA	5" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Type LB, LR Or LL, Two Hub Conduit Body And Cover	1,086.69	72.26
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*54.19*	
26 05 33 13-1834	EA	6" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Type LB, LR Or LL, Two Hub Conduit Body And Cover	1,233.35	80.28
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*60.22*	

26 05 33 13-1835 Explosion Proof Conduit Fittings *(26 05 33 13-0059)*

Note: For use with Rigid Galvanized Steel (RGS), Electrical Metallic Tubing (EMT) and Intermediate Metal Conduit (IMC) conduit.

26 05 33 13-1836 Explosion Proof Malleable Iron Conduit Unions *(26 05 33 13-1835)*

26 05 33 13-1837	EA	1/2" Explosion Proof Malleable Iron Conduit Union	42.64	8.59
26 05 33 13-1838	EA	3/4" Explosion Proof Malleable Iron Conduit Union	52.86	9.49
26 05 33 13-1839	EA	1" Explosion Proof Malleable Iron Conduit Union	84.52	12.65
26 05 33 13-1840	EA	1-1/4" Explosion Proof Malleable Iron Conduit Union	112.62	14.01
26 05 33 13-1841	EA	1-1/2" Explosion Proof Malleable Iron Conduit Union	141.84	17.17
26 05 33 13-1842	EA	2" Explosion Proof Malleable Iron Conduit Union	177.13	19.89
26 05 33 13-1843	EA	2-1/2" Explosion Proof Malleable Iron Conduit Union	270.05	28.43
26 05 33 13-1844	EA	3" Explosion Proof Malleable Iron Conduit Union	343.84	33.84
26 05 33 13-1845	EA	3-1/2" Explosion Proof Malleable Iron Conduit Union	581.80	40.61
26 05 33 13-1846	EA	4" Explosion Proof Malleable Iron Conduit Union	614.68	51.88

26 05 33 13-1847 Explosion Proof Malleable Iron Conduit Bodies *(26 05 33 13-1835)*

26 05 33 13-1848	EA	1/2" Explosion Proof Malleable Iron Two Hub Conduit Body	151.89	27.12
26 05 33 13-1849	EA	3/4" Explosion Proof Malleable Iron Two Hub Conduit Body	171.15	30.74
26 05 33 13-1850	EA	1" Explosion Proof Malleable Iron Two Hub Conduit Conduit Body	201.04	33.90
26 05 33 13-1851	EA	1/2" Explosion Proof Malleable Iron Three Hub Conduit Body	170.43	33.90
26 05 33 13-1852	EA	3/4" Explosion Proof Malleable Iron Three Hub Conduit Body	202.97	40.68
26 05 33 13-1853	EA	1" Explosion Proof Malleable Iron Three Hub Conduit Body	240.66	46.55

26 05 33 13-1854 Explosion Proof Malleable Iron Conduit Sealing Fitting, Horizontal/Vertical *(26 05 33 13-1835)*

Note: Includes sealing gasket and lock nut.

26 05 33 13-1855	EA	1/2" x 1" Explosion Proof Malleable Iron Conduit Sealing Fitting, Horizontal/Vertical	125.57	22.60
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.95*	
26 05 33 13-1856	EA	3/4" x 1" Explosion Proof Malleable Iron Conduit Sealing Fitting, Horizontal/Vertical	127.67	25.31
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*18.98*	
26 05 33 13-1857	EA	1" x 1-1/2" Explosion Proof Malleable Iron Conduit Sealing Fitting, Horizontal/Vertical	139.38	27.57
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.68*	
26 05 33 13-1858	EA	1-1/4" x 2" Explosion Proof Malleable Iron Conduit Sealing Fitting, Horizontal/Vertical	179.60	33.90
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*25.43*	
26 05 33 13-1859	EA	1-1/2" x 2" Explosion Proof Malleable Iron Conduit Sealing Fitting, Horizontal/Vertical	230.31	39.77
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*29.83*	
26 05 33 13-1860	EA	2" x 2-1/2" Explosion Proof Malleable Iron Conduit Sealing Fitting, Horizontal/Vertical	297.73	45.20
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*33.90*	
26 05 33 13-1861	EA	2-1/2" x 3" Explosion Proof Malleable Iron Conduit Sealing Fitting, Horizontal/Vertical	422.88	67.68
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*50.76*	
26 05 33 13-1862	EA	3" x 4" Explosion Proof Malleable Iron Conduit Sealing Fitting, Horizontal/Vertical	534.71	84.82
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*63.62*	
26 05 33 13-1863	EA	3-1/2" x 4" Explosion Proof Malleable Iron Conduit Sealing Fitting, Horizontal/Vertical	763.02	93.40
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*70.05*	
26 05 33 13-1864	EA	4" x 5" Explosion Proof Malleable Iron Conduit Sealing Fitting, Horizontal/Vertical	990.17	101.52
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*76.14*	

26 05 33 13-1865 Explosion Proof Flexible Conduit Couplings *(26 05 33 13-1835)*

26 05 33 13-1866	EA	1/2" x 12" Explosion Proof Flexible Conduit Coupling	351.49	10.39
26 05 33 13-1867	EA	3/4" x 15" Explosion Proof Flexible Conduit Coupling	460.44	11.75

26 05 33 13-1868 Conduit Installed Below Grade *(26 05 33 13-0058)*

Note: By direct burial In trench or in concrete slabs or duct banks. Includes detectable warning tape for underground conduits. Excludes trenching, backfilling and concrete.

26 05 33 13-1869 Schedule 40 Polyvinyl Chloride (PVC) Conduit, Direct Burial *(26 05 33 13-1868)*

26 05 33 13-1870 Schedule 40 Polyvinyl Chloride (PVC) Conduit With Coupled End, Direct Burial *(26 05 33 13-1869)*

Note: Includes field bend conduit up to and including 1". See CSI section 26 05 33 13-2329 for field bending >1".

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1871	LF	1/2" Schedule 40 Polyvinyl Chloride (PVC) Conduit With Coupled End, Direct Burial	4.25	
		For Schedule 60, Add	*0.41*	
		For Schedule 80, Add	*0.67*	
26 05 33 13-1872	LF	3/4" Schedule 40 Polyvinyl Chloride (PVC) Conduit With Coupled End, Direct Burial	4.84	
		For Schedule 60, Add	*0.51*	
		For Schedule 80, Add	*0.81*	
26 05 33 13-1873	LF	1" Schedule 40 Polyvinyl Chloride (PVC) Conduit With Coupled End, Direct Burial	5.74	
		For Schedule 60, Add	*0.68*	
		For Schedule 80, Add	*1.07*	
26 05 33 13-1874	LF	1-1/4" Schedule 40 Polyvinyl Chloride (PVC) Conduit With Coupled End, Direct Burial	6.65	
		For Schedule 60, Add	*0.86*	
		For Schedule 80, Add	*1.32*	
26 05 33 13-1875	LF	1-1/2" Schedule 40 Polyvinyl Chloride (PVC) Conduit With Coupled End, Direct Burial	7.42	
		For Schedule 60, Add	*1.00*	
		For Schedule 80, Add	*1.53*	
26 05 33 13-1876	LF	2" Schedule 40 Polyvinyl Chloride (PVC) Conduit With Coupled End, Direct Burial	8.67	
		For Schedule 60, Add	*1.26*	
		For Schedule 80, Add	*1.90*	
26 05 33 13-1877	LF	2-1/2" Schedule 40 Polyvinyl Chloride (PVC) Conduit With Coupled End, Direct Burial	11.39	
		For Schedule 60, Add	*1.89*	
		For Schedule 80, Add	*2.79*	
26 05 33 13-1878	LF	3" Schedule 40 Polyvinyl Chloride (PVC) Conduit With Coupled End, Direct Burial	12.91	
		For Schedule 60, Add	*2.22*	
		For Schedule 80, Add	*3.26*	
26 05 33 13-1879	LF	3-1/2" Schedule 40 Polyvinyl Chloride (PVC) Conduit With Coupled End, Direct Burial	15.36	
		For Schedule 60, Add	*2.79*	
		For Schedule 80, Add	*4.06*	
26 05 33 13-1880	LF	4" Schedule 40 Polyvinyl Chloride (PVC) Conduit With Coupled End, Direct Burial	16.60	
		For Schedule 60, Add	*3.05*	
		For Schedule 80, Add	*4.43*	
26 05 33 13-1881	LF	5" Schedule 40 Polyvinyl Chloride (PVC) Conduit With Coupled End, Direct Burial	21.93	
		For Schedule 60, Add	*4.33*	
		For Schedule 80, Add	*6.23*	
26 05 33 13-1882	LF	6" Schedule 40 Polyvinyl Chloride (PVC) Conduit With Coupled End, Direct Burial	27.36	
		For Schedule 60, Add	*5.64*	
		For Schedule 80, Add	*8.07*	

26 05 33 13-1883 Schedule 40 Polyvinyl Chloride (PVC) Conduit 90 Degree Elbows, Direct Burial *(26 05 33 13-1869)*

See CSI section 26 05 33 13-2329 for conduit field bending.

26 05 33 13-1884	EA	1/2" Schedule 40 Polyvinyl Chloride (PVC) Conduit 90 Degree Elbow, Direct Burial	26.45	
		For Schedule 60, Add	*1.60*	
		For Schedule 80, Add	*2.99*	
26 05 33 13-1885	EA	3/4" Schedule 40 Polyvinyl Chloride (PVC) Conduit 90 Degree Elbow, Direct Burial	31.76	
		For Schedule 60, Add	*1.92*	
		For Schedule 80, Add	*3.59*	
26 05 33 13-1886	EA	1" Schedule 40 Polyvinyl Chloride (PVC) Conduit 90 Degree Elbow, Direct Burial	37.70	
		For Schedule 60, Add	*2.40*	
		For Schedule 80, Add	*4.42*	
26 05 33 13-1887	EA	1-1/4" Schedule 40 Polyvinyl Chloride (PVC) Conduit 90 Degree Elbow, Direct Burial	43.86	
		For Schedule 60, Add	*2.94*	
		For Schedule 80, Add	*5.32*	
26 05 33 13-1888	EA	1-1/2" Schedule 40 Polyvinyl Chloride (PVC) Conduit 90 Degree Elbow, Direct Burial	50.21	
		For Schedule 60, Add	*3.52*	
		For Schedule 80, Add	*6.28*	
26 05 33 13-1889	EA	2" Schedule 40 Polyvinyl Chloride (PVC) Conduit 90 Degree Elbow, Direct Burial	57.20	
		For Schedule 60, Add	*4.26*	
		For Schedule 80, Add	*7.48*	
26 05 33 13-1890	EA	2-1/2" Schedule 40 Polyvinyl Chloride (PVC) Conduit 90 Degree Elbow, Direct Burial	67.52	
		For Schedule 60, Add	*5.84*	
		For Schedule 80, Add	*9.83*	
26 05 33 13-1891	EA	3" Schedule 40 Polyvinyl Chloride (PVC) Conduit 90 Degree Elbow, Direct Burial	80.28	
		For Schedule 60, Add	*8.03*	
		For Schedule 80, Add	*13.04*	
26 05 33 13-1892	EA	3-1/2" Schedule 40 Polyvinyl Chloride (PVC) Conduit 90 Degree Elbow, Direct Burial	98.11	
		For Schedule 60, Add	*10.48*	
		For Schedule 80, Add	*16.77*	
26 05 33 13-1893	EA	4" Schedule 40 Polyvinyl Chloride (PVC) Conduit 90 Degree Elbow, Direct Burial	116.11	
		For Schedule 60, Add	*12.97*	
		For Schedule 80, Add	*20.57*	
26 05 33 13-1894	EA	5" Schedule 40 Polyvinyl Chloride (PVC) Conduit 90 Degree Elbow, Direct Burial	153.64	
		For Schedule 60, Add	*20.35*	
		For Schedule 80, Add	*31.19*	
26 05 33 13-1895	EA	6" Schedule 40 Polyvinyl Chloride (PVC) Conduit 90 Degree Elbow, Direct Burial	181.06	
		For Schedule 60, Add	*25.19*	
		For Schedule 80, Add	*38.28*	

26 05 33 13-1896 Schedule 40 Polyvinyl Chloride (PVC) Conduit 45 Degree Elbows, Direct Burial *(26 05 33 13-1869)*

See CSI section 26 05 33 13-2329 for conduit field bending.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1897	EA	1/2" Schedule 40 Polyvinyl Chloride (PVC) Conduit 45 Degree Elbow, Direct Burial	26.45	
		For Schedule 60, Add	*1.60*	
		For Schedule 80, Add	*2.99*	
26 05 33 13-1898	EA	3/4" Schedule 40 Polyvinyl Chloride (PVC) Conduit 45 Degree Elbow, Direct Burial	31.66	
		For Schedule 60, Add	*1.90*	
		For Schedule 80, Add	*3.56*	
26 05 33 13-1899	EA	1" Schedule 40 Polyvinyl Chloride (PVC) Conduit 45 Degree Elbow, Direct Burial	37.57	
		For Schedule 60, Add	*2.37*	
		For Schedule 80, Add	*4.37*	
26 05 33 13-1900	EA	1-1/4" Schedule 40 Polyvinyl Chloride (PVC) Conduit 45 Degree Elbow, Direct Burial	43.47	
		For Schedule 60, Add	*2.84*	
		For Schedule 80, Add	*5.18*	
26 05 33 13-1901	EA	1-1/2" Schedule 40 Polyvinyl Chloride (PVC) Conduit 45 Degree Elbow, Direct Burial	49.33	
		For Schedule 60, Add	*3.30*	
		For Schedule 80, Add	*5.98*	
26 05 33 13-1902	EA	2" Schedule 40 Polyvinyl Chloride (PVC) Conduit 45 Degree Elbow, Direct Burial	56.73	
		For Schedule 60, Add	*4.15*	
		For Schedule 80, Add	*7.31*	
26 05 33 13-1903	EA	2-1/2" Schedule 40 Polyvinyl Chloride (PVC) Conduit 45 Degree Elbow, Direct Burial	66.64	
		For Schedule 60, Add	*5.62*	
		For Schedule 80, Add	*9.52*	
26 05 33 13-1904	EA	3" Schedule 40 Polyvinyl Chloride (PVC) Conduit 45 Degree Elbow, Direct Burial	79.16	
		For Schedule 60, Add	*7.75*	
		For Schedule 80, Add	*12.65*	
26 05 33 13-1905	EA	3-1/2" Schedule 40 Polyvinyl Chloride (PVC) Conduit 45 Degree Elbow, Direct Burial	94.97	
		For Schedule 60, Add	*9.69*	
		For Schedule 80, Add	*15.67*	
26 05 33 13-1906	EA	4" Schedule 40 Polyvinyl Chloride (PVC) Conduit 45 Degree Elbow, Direct Burial	113.41	
		For Schedule 60, Add	*12.30*	
		For Schedule 80, Add	*19.62*	
26 05 33 13-1907	EA	5" Schedule 40 Polyvinyl Chloride (PVC) Conduit 45 Degree Elbow, Direct Burial	150.14	
		For Schedule 60, Add	*19.47*	
		For Schedule 80, Add	*29.97*	
26 05 33 13-1908	EA	6" Schedule 40 Polyvinyl Chloride (PVC) Conduit 45 Degree Elbow, Direct Burial	170.64	
		For Schedule 60, Add	*22.59*	
		For Schedule 80, Add	*34.63*	

26 05 33 13-1909 Polyvinyl Chloride (PVC) Conduit Female Adapters, Direct Burial *(26 05 33 13-1869)*

26 05 33 13-1910	EA	1/2" Polyvinyl Chloride (PVC) Conduit Female Adapter, Direct Burial	14.69	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.22*	
26 05 33 13-1911	EA	3/4" Polyvinyl Chloride (PVC) Conduit Female Adapter, Direct Burial	16.92	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.82*	
26 05 33 13-1912	EA	1" Polyvinyl Chloride (PVC) Conduit Female Adapter, Direct Burial	19.25	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 05 33 13-1913	EA	1-1/4" Polyvinyl Chloride (PVC) Conduit Female Adapter, Direct Burial	21.71	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.02*	
26 05 33 13-1914	EA	1-1/2" Polyvinyl Chloride (PVC) Conduit Female Adapter, Direct Burial	23.87	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.62*	
26 05 33 13-1915	EA	2" Polyvinyl Chloride (PVC) Conduit Female Adapter, Direct Burial	26.64	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.22*	
26 05 33 13-1916	EA	2-1/2" Polyvinyl Chloride (PVC) Conduit Female Adapter, Direct Burial	31.77	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.13*	
26 05 33 13-1917	EA	3" Polyvinyl Chloride (PVC) Conduit Female Adapter, Direct Burial	36.44	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.03*	
26 05 33 13-1918	EA	3-1/2" Polyvinyl Chloride (PVC) Conduit Female Adapter, Direct Burial	43.16	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.54*	
26 05 33 13-1919	EA	4" Polyvinyl Chloride (PVC) Conduit Female Adapter, Direct Burial	48.56	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*12.04*	
26 05 33 13-1920	EA	5" Polyvinyl Chloride (PVC) Conduit Female Adapter, Direct Burial	62.22	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.55*	
26 05 33 13-1921	EA	6" Polyvinyl Chloride (PVC) Conduit Female Adapter, Direct Burial	70.78	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.05*	

26 05 33 13-1922 Polyvinyl Chloride (PVC) Conduit Bell Ends And Plug, Direct Burial *(26 05 33 13-1869)*

26 05 33 13-1923	EA	1/2" Polyvinyl Chloride (PVC) Conduit Bell End And Plug, Direct Burial	17.15
26 05 33 13-1924	EA	3/4" Polyvinyl Chloride (PVC) Conduit Bell End And Plug, Direct Burial	19.54
26 05 33 13-1925	EA	1" Polyvinyl Chloride (PVC) Conduit Bell End And Plug, Direct Burial	21.95
26 05 33 13-1926	EA	1-1/4" Polyvinyl Chloride (PVC) Conduit Bell End And Plug, Direct Burial	28.16
26 05 33 13-1927	EA	1-1/2" Polyvinyl Chloride (PVC) Conduit Bell End And Plug, Direct Burial	31.17
26 05 33 13-1928	EA	2" Polyvinyl Chloride (PVC) Conduit Bell End And Plug, Direct Burial	35.07
26 05 33 13-1929	EA	2-1/2" Polyvinyl Chloride (PVC) Conduit Bell End And Plug, Direct Burial	39.25
26 05 33 13-1930	EA	3" Polyvinyl Chloride (PVC) Conduit Bell End And Plug, Direct Burial	44.41
26 05 33 13-1931	EA	3-1/2" Polyvinyl Chloride (PVC) Conduit Bell End And Plug, Direct Burial	52.62
26 05 33 13-1932	EA	4" Polyvinyl Chloride (PVC) Conduit Bell End And Plug, Direct Burial	58.06
26 05 33 13-1933	EA	5" Polyvinyl Chloride (PVC) Conduit Bell End And Plug, Direct Burial	73.77
26 05 33 13-1934	EA	6" Polyvinyl Chloride (PVC) Conduit Bell End And Plug, Direct Burial	83.07

26 05 33 13-1935 Polyvinyl Chloride (PVC) Conduit Male Terminal Adapters, Direct Burial *(26 05 33 13-1869)*

26 05 33 13-1936	EA	1/2" Polyvinyl Chloride (PVC) Conduit Male Terminal Adapters, Direct Burial	14.59

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1937	EA	3/4" Polyvinyl Chloride (PVC) Conduit Male Terminal Adapters, Direct Burial	16.92	
26 05 33 13-1938	EA	1" Polyvinyl Chloride (PVC) Conduit Male Terminal Adapters, Direct Burial	19.11	
26 05 33 13-1939	EA	1-1/4" Polyvinyl Chloride (PVC) Conduit Male Terminal Adapters, Direct Burial	21.47	
26 05 33 13-1940	EA	1-1/2" Polyvinyl Chloride (PVC) Conduit Male Terminal Adapter, Direct Burial	23.65	
26 05 33 13-1941	EA	2" Polyvinyl Chloride (PVC) Conduit Male Terminal Adapter, Direct Burial	26.34	
26 05 33 13-1942	EA	2-1/2" Polyvinyl Chloride (PVC) Conduit Male Terminal Adapter, Direct Burial	31.17	
26 05 33 13-1943	EA	3" Polyvinyl Chloride (PVC) Conduit Male Terminal Adapter, Direct Burial	35.61	
26 05 33 13-1944	EA	3-1/2" Polyvinyl Chloride (PVC) Conduit Male Terminal Adapter, Direct Burial	42.09	
26 05 33 13-1945	EA	4" Polyvinyl Chloride (PVC) Conduit Male Terminal Adapter, Direct Burial	47.47	
26 05 33 13-1946	EA	5" Polyvinyl Chloride (PVC) Conduit Male Terminal Adapter, Direct Burial	60.06	
26 05 33 13-1947	EA	6" Polyvinyl Chloride (PVC) Conduit Male Terminal Adapter, Direct Burial	68.19	

26 05 33 13-1948 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Conduit, Direct Burial *(26 05 33 13-1868)*

Note: 40 mil Polyvinyl Chloride (PVC) coated, 2 mil urethane lined (Ocal Blue, Crouse-Hinds, Appleton or O-Z/Gedney).

26 05 33 13-1949 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Conduit, Direct Burial *(26 05 33 13-1948)*

Note: Includes field bending for conduit up to and including 1". See CSI section 26 05 33 13-2319 for field bending >1".

26 05 33 13-1950	LF	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Conduit, Direct Burial	11.08	2.17
		For >250 To 500, Deduct	*-0.41*	
		For >500 To 1,000, Deduct	*-0.69*	
		For >1,000, Deduct	*-0.97*	
26 05 33 13-1951	LF	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Conduit, Direct Burial	12.45	2.68
		For >250 To 500, Deduct	*-0.47*	
		For >500 To 1,000, Deduct	*-0.78*	
		For >1,000, Deduct	*-1.09*	
26 05 33 13-1952	LF	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Conduit, Direct Burial	15.32	2.99
		For >250 To 500, Deduct	*-0.59*	
		For >500 To 1,000, Deduct	*-0.97*	
		For >1,000, Deduct	*-1.35*	
26 05 33 13-1953	LF	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Conduit, Direct Burial	18.52	4.02
		For >250 To 500, Deduct	*-0.72*	
		For >500 To 1,000, Deduct	*-1.18*	
		For >1,000, Deduct	*-1.65*	
26 05 33 13-1954	LF	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Conduit, Direct Burial	21.78	4.53
		For >250 To 500, Deduct	*-0.86*	
		For >500 To 1,000, Deduct	*-1.40*	
		For >1,000, Deduct	*-1.95*	
26 05 33 13-1955	LF	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Conduit, Direct Burial	27.62	4.94
		For >250 To 500, Deduct	*-1.10*	
		For >500 To 1,000, Deduct	*-1.79*	
		For >1,000, Deduct	*-2.48*	
26 05 33 13-1956	LF	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Conduit, Direct Burial	40.16	7.42
		For >250 To 500, Deduct	*-1.62*	
		For >500 To 1,000, Deduct	*-2.63*	
		For >1,000, Deduct	*-3.63*	
26 05 33 13-1957	LF	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Conduit, Direct Burial	51.76	9.28
		For >250 To 500, Deduct	*-2.07*	
		For >500 To 1,000, Deduct	*-3.37*	
		For >1,000, Deduct	*-4.66*	
26 05 33 13-1958	LF	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Conduit, Direct Burial	63.86	9.79
		For >250 To 500, Deduct	*-2.55*	
		For >500 To 1,000, Deduct	*-4.15*	
		For >1,000, Deduct	*-5.74*	
26 05 33 13-1959	LF	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Conduit, Direct Burial	75.83	10.82
		For >250 To 500, Deduct	*-3.02*	
		For >500 To 1,000, Deduct	*-4.91*	
		For >1,000, Deduct	*-6.81*	
26 05 33 13-1960	LF	5" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Conduit, Direct Burial	118.77	14.94
		For >250 To 500, Deduct	*-4.96*	
		For >500 To 1,000, Deduct	*-7.93*	
		For >1,000, Deduct	*-10.90*	
26 05 33 13-1961	LF	6" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Conduit, Direct Burial	158.56	19.58
		For >250 To 500, Deduct	*-6.69*	
		For >500 To 1,000, Deduct	*-10.66*	
		For >1,000, Deduct	*-14.62*	

26 05 33 13-1962 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Couplings, Direct Burial *(26 05 33 13-1948)*

26 05 33 13-1963	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Coupling, Direct Burial	11.90	3.09
26 05 33 13-1964	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Coupling, Direct Burial	14.22	4.12
26 05 33 13-1965	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Coupling, Direct Burial	18.07	5.15
26 05 33 13-1966	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Coupling, Direct Burial	20.39	5.67
26 05 33 13-1967	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Coupling, Direct Burial	24.17	6.70
26 05 33 13-1968	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Coupling, Direct Burial	31.22	7.73
26 05 33 13-1969	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Coupling, Direct Burial	57.56	9.28
26 05 33 13-1970	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Coupling, Direct Burial	73.14	12.89
26 05 33 13-1971	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Coupling, Direct Burial	90.65	14.94

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-1972	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Coupling, Direct Burial	112.28	20.61
26 05 33 13-1973	EA	5" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Coupling, Direct Burial	288.22	28.34
26 05 33 13-1974	EA	6" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Coupling, Direct Burial	290.59	15.97
26 05 33 13-1975		**Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Standard Radius Elbows, Direct Burial** *(26 05 33 13-1948)*		
		Note: 90, 45, or 30-degree.		
26 05 33 13-1976	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Standard Radius Elbow, Direct Burial	45.77	12.89
26 05 33 13-1977	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Standard Radius Elbow, Direct Burial	52.72	15.97
26 05 33 13-1978	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Standard Radius Elbow, Direct Burial	62.98	19.58
26 05 33 13-1979	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Standard Radius Elbow, Direct Burial	74.62	22.67
26 05 33 13-1980	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Standard Radius Elbow, Direct Burial	87.50	25.76
26 05 33 13-1981	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Standard Radius Elbow, Direct Burial	106.88	28.34
26 05 33 13-1982	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Standard Radius Elbow, Direct Burial	165.70	35.56
26 05 33 13-1983	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Standard Radius Elbow, Direct Burial	248.03	48.43
26 05 33 13-1984	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Standard Radius Elbow, Direct Burial	307.60	54.62
26 05 33 13-1985	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Standard Radius Elbow, Direct Burial	351.89	71.10
26 05 33 13-1986	EA	5" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Standard Radius Elbow, Direct Burial	737.16	115.94
26 05 33 13-1987	EA	6" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Standard Radius Elbow, Direct Burial	1,160.52	174.16
26 05 33 13-1988		**Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 12" Large Radius Elbows, Direct Burial** *(26 05 33 13-1948)*		
26 05 33 13-1989	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 12" Large Radius Elbow, Direct Burial	110.15	19.58
26 05 33 13-1990	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 12" Large Radius Elbow, Direct Burial	123.86	22.67
26 05 33 13-1991	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 12" Large Radius Elbow, Direct Burial	141.41	25.76
26 05 33 13-1992	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 12" Large Radius Elbow, Direct Burial	169.09	28.34
26 05 33 13-1993	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 12" Large Radius Elbow, Direct Burial	236.11	35.56
26 05 33 13-1994		**Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 15" Large Radius Elbows, Direct Burial** *(26 05 33 13-1948)*		
26 05 33 13-1995	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 15" Large Radius Elbow, Direct Burial	122.90	19.58
26 05 33 13-1996	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 15" Large Radius Elbow, Direct Burial	144.93	22.67
26 05 33 13-1997	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 15" Large Radius Elbow, Direct Burial	156.52	25.76
26 05 33 13-1998	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 15" Large Radius Elbow, Direct Burial	202.04	28.34
26 05 33 13-1999	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 15" Large Radius Elbow, Direct Burial	267.89	35.56
26 05 33 13-2000	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 15" Large Radius Elbow, Direct Burial	342.26	48.43
26 05 33 13-2001		**Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 18" Large Radius Elbows, Direct Burial** *(26 05 33 13-1948)*		
26 05 33 13-2002	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 18" Large Radius Elbow, Direct Burial	138.15	19.58
26 05 33 13-2003	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 18" Large Radius Elbow, Direct Burial	155.91	22.67
26 05 33 13-2004	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 18" Large Radius Elbow, Direct Burial	175.91	25.76
26 05 33 13-2005	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 18" Large Radius Elbow, Direct Burial	212.97	28.34
26 05 33 13-2006	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 18" Large Radius Elbow, Direct Burial	304.40	35.56
26 05 33 13-2007	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 18" Large Radius Elbow, Direct Burial	385.13	48.43
26 05 33 13-2008	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 18" Large Radius Elbow, Direct Burial	487.12	54.62
26 05 33 13-2009	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 18" Large Radius Elbow, Direct Burial	547.47	71.10

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2010		**Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 24" Large Radius Elbows, Direct Burial** *(26 05 33 13-1948)*		
26 05 33 13-2011	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 24" Large Radius Elbow, Direct Burial	164.50	19.58
26 05 33 13-2012	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 24" Large Radius Elbow, Direct Burial	181.68	22.67
26 05 33 13-2013	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 24" Large Radius Elbow, Direct Burial	205.16	25.76
26 05 33 13-2014	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 24" Large Radius Elbow, Direct Burial	255.10	28.34
26 05 33 13-2015	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 24" Large Radius Elbow, Direct Burial	369.74	35.56
26 05 33 13-2016	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 24" Large Radius Elbow, Direct Burial	457.76	48.43
26 05 33 13-2017	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 24" Large Radius Elbow, Direct Burial	531.46	54.62
26 05 33 13-2018	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 24" Large Radius Elbow, Direct Burial	628.88	71.10
26 05 33 13-2019		**Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 30" Large Radius Elbows, Direct Burial** *(26 05 33 13-1948)*		
26 05 33 13-2020	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 30" Large Radius Elbow, Direct Burial	184.99	19.58
26 05 33 13-2021	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 30" Large Radius Elbow, Direct Burial	205.66	22.67
26 05 33 13-2022	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 30" Large Radius Elbow, Direct Burial	233.96	25.76
26 05 33 13-2023	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 30" Large Radius Elbow, Direct Burial	291.77	28.34
26 05 33 13-2024	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 30" Large Radius Elbow, Direct Burial	405.40	35.56
26 05 33 13-2025	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 30" Large Radius Elbow, Direct Burial	515.85	48.43
26 05 33 13-2026	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 30" Large Radius Elbow, Direct Burial	639.28	54.62
26 05 33 13-2027	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 30" Large Radius Elbow, Direct Burial	703.61	71.10
26 05 33 13-2028	EA	5" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 30" Large Radius Elbow, Direct Burial	1,173.43	115.94
26 05 33 13-2029		**Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 36" Large Radius Elbows, Direct Burial** *(26 05 33 13-1948)*		
26 05 33 13-2030	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 36" Large Radius Elbow, Direct Burial	211.80	19.58
26 05 33 13-2031	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 36" Large Radius Elbow, Direct Burial	234.64	22.67
26 05 33 13-2032	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 36" Large Radius Elbow, Direct Burial	265.52	25.76
26 05 33 13-2033	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 36" Large Radius Elbow, Direct Burial	332.44	28.34
26 05 33 13-2034	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 36" Large Radius Elbow, Direct Burial	464.81	35.56
26 05 33 13-2035	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 36" Large Radius Elbow, Direct Burial	589.86	48.43
26 05 33 13-2036	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 36" Large Radius Elbow, Direct Burial	693.31	54.62
26 05 33 13-2037	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 36" Large Radius Elbow, Direct Burial	800.09	71.10
26 05 33 13-2038	EA	5" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 36" Large Radius Elbow, Direct Burial	1,241.04	115.94
26 05 33 13-2039	EA	6" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 36" Large Radius Elbow, Direct Burial	1,694.77	174.16
26 05 33 13-2040		**Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 42" Large Radius Elbows, Direct Burial** *(26 05 33 13-1948)*		
26 05 33 13-2041	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 42" Large Radius Elbow, Direct Burial	249.12	19.58
26 05 33 13-2042	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 42" Large Radius Elbow, Direct Burial	260.47	22.67
26 05 33 13-2043	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 42" Large Radius Elbow, Direct Burial	307.77	25.76
26 05 33 13-2044	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 42" Large Radius Elbow, Direct Burial	389.05	28.34
26 05 33 13-2045	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 42" Large Radius Elbow, Direct Burial	544.92	35.56
26 05 33 13-2046	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 42" Large Radius Elbow, Direct Burial	689.64	48.43

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2047	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 42" Large Radius Elbow, Direct Burial	843.51	54.62
26 05 33 13-2048	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 42" Large Radius Elbow, Direct Burial	987.77	71.10
26 05 33 13-2049	EA	5" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 42" Large Radius Elbow, Direct Burial	1,461.58	115.94
26 05 33 13-2050	EA	6" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 42" Large Radius Elbow, Direct Burial	1,796.01	174.16
26 05 33 13-2051		Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 48" Large Radius Elbows, Direct Burial *(26 05 33 13-1948)*		
26 05 33 13-2052	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 48" Large Radius Elbow, Direct Burial	258.11	19.58
26 05 33 13-2053	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 48" Large Radius Elbow, Direct Burial	304.17	22.67
26 05 33 13-2054	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 48" Large Radius Elbow, Direct Burial	344.30	25.76
26 05 33 13-2055	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 48" Large Radius Elbow, Direct Burial	406.08	28.34
26 05 33 13-2056	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 48" Large Radius Elbow, Direct Burial	564.93	35.56
26 05 33 13-2057	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 48" Large Radius Elbow, Direct Burial	720.33	48.43
26 05 33 13-2058	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 48" Large Radius Elbow, Direct Burial	925.31	54.62
26 05 33 13-2059	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 48" Large Radius Elbow, Direct Burial	1,030.33	71.10
26 05 33 13-2060	EA	5" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 48" Large Radius Elbow, Direct Burial	1,520.83	115.94
26 05 33 13-2061	EA	6" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) 48" Large Radius Elbow, Direct Burial	1,847.44	174.16
26 05 33 13-2062		Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS), UNF Conduit Unions, Direct Burial *(26 05 33 13-1948)*		
26 05 33 13-2063	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNF Conduit Union, Direct Burial	85.40	12.89
26 05 33 13-2064	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNF Conduit Union, Direct Burial	92.68	15.97
26 05 33 13-2065	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNF Conduit Union, Direct Burial	120.57	19.58
26 05 33 13-2066	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNF Conduit Union, Direct Burial	176.36	22.67
26 05 33 13-2067	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNF Conduit Union, Direct Burial	209.55	25.76
26 05 33 13-2068	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNF Conduit Union, Direct Burial	267.27	28.34
26 05 33 13-2069	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNF Conduit Union, Direct Burial	356.23	35.56
26 05 33 13-2070	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNF Conduit Union, Direct Burial	464.18	35.56
26 05 33 13-2071	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNF Conduit Union, Direct Burial	596.84	54.62
26 05 33 13-2072	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNF Conduit Union, Direct Burial	768.29	71.10
26 05 33 13-2073	EA	5" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNF Conduit Union, Direct Burial	1,402.08	115.94
26 05 33 13-2074	EA	6" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNF Conduit Union, Direct Burial	1,742.03	174.16
26 05 33 13-2075		Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS), UNY Conduit Unions, Direct Burial *(26 05 33 13-1948)*		
26 05 33 13-2076	EA	1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNY Conduit Union, Direct Burial	87.41	12.89
26 05 33 13-2077	EA	3/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNY Conduit Union, Direct Burial	100.35	15.97
26 05 33 13-2078	EA	1" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNY Conduit Union, Direct Burial	124.66	19.58
26 05 33 13-2079	EA	1-1/4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNY Conduit Union, Direct Burial	183.87	22.67
26 05 33 13-2080	EA	1-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNY Conduit Union, Direct Burial	219.98	25.76
26 05 33 13-2081	EA	2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNY Conduit Union, Direct Burial	289.78	28.34
26 05 33 13-2082	EA	2-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNY Conduit Union, Direct Burial	404.38	35.56
26 05 33 13-2083	EA	3" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNY Conduit Union, Direct Burial	513.15	35.56
26 05 33 13-2084	EA	3-1/2" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNY Conduit Union, Direct Burial	685.36	54.62

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2085	EA	4" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNY Conduit Union, Direct Burial	856.49	71.10
26 05 33 13-2086	EA	5" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNY Conduit Union, Direct Burial	1,563.76	115.94
26 05 33 13-2087	EA	6" Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) UNY Conduit Union, Direct Burial	2,003.10	174.16

26 05 33 13-2088 Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS), Nipples, Direct Burial *(26 05 33 13-1948)*

26 05 33 13-2089	EA	1/2" x 2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	29.27	6.19
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.71*	
26 05 33 13-2090	EA	3/4" x 2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	32.70	7.73
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.64*	
26 05 33 13-2091	EA	1" x 2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	37.77	9.79
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.87*	
26 05 33 13-2092	EA	1-1/4" x 2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	45.04	11.33
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 05 33 13-2093	EA	1-1/2" x 2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	48.86	12.89
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	
26 05 33 13-2094	EA	1/2" x 2-1/2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	32.49	6.70
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.02*	
26 05 33 13-2095	EA	3/4" x 2-1/2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	35.01	7.73
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.64*	
26 05 33 13-2096	EA	1" x 2-1/2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	40.10	9.79
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.87*	
26 05 33 13-2097	EA	1-1/4" x 2-1/2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	47.51	11.33
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 05 33 13-2098	EA	1-1/2" x 2-1/2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	51.53	12.89
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	
26 05 33 13-2099	EA	2" x 2-1/2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	55.78	14.43
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.66*	
26 05 33 13-2100	EA	1/2" x 3" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	32.65	6.70
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.02*	
26 05 33 13-2101	EA	3/4" x 3" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	35.16	7.73
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.64*	
26 05 33 13-2102	EA	1" x 3" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	40.39	9.79
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.87*	
26 05 33 13-2103	EA	1-1/4" x 3" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	47.83	11.33
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 05 33 13-2104	EA	1-1/2" x 3" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	51.85	12.89
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	
26 05 33 13-2105	EA	2" x 3" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	56.60	14.43
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.66*	
26 05 33 13-2106	EA	1/2" x 3-1/2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	34.84	6.70
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.02*	
26 05 33 13-2107	EA	3/4" x 3-1/2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	37.36	7.73
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.64*	
26 05 33 13-2108	EA	1" x 3-1/2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	42.75	9.79
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.87*	
26 05 33 13-2109	EA	1-1/4" x 3-1/2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	49.17	11.33
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 05 33 13-2110	EA	1-1/2" x 3-1/2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	53.33	12.89
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	
26 05 33 13-2111	EA	2" x 3-1/2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	59.19	14.43
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.66*	
26 05 33 13-2112	EA	2-1/2" x 3-1/2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	83.20	17.52
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.51*	
26 05 33 13-2113	EA	3" x 3-1/2" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	107.35	24.22
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.53*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2114	EA	1/2" x 4" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	35.01	6.70
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.02*	
26 05 33 13-2115	EA	3/4" x 4" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	37.66	7.73
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.64*	
26 05 33 13-2116	EA	1" x 4" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	43.07	9.79
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.87*	
26 05 33 13-2117	EA	1-1/4" x 4" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	50.51	11.33
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 05 33 13-2118	EA	1-1/2" x 4" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	54.81	12.89
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	
26 05 33 13-2119	EA	2" x 4" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	61.78	14.43
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.66*	
26 05 33 13-2120	EA	2-1/2" x 4" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	85.48	17.52
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.51*	
26 05 33 13-2121	EA	3" x 4" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	112.28	24.22
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.53*	
26 05 33 13-2122	EA	3-1/2" x 4" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	134.24	27.30
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.38*	
26 05 33 13-2123	EA	4" x 4" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	156.30	35.56
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.33*	
26 05 33 13-2124	EA	1/2" x 5" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	35.31	6.70
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.02*	
26 05 33 13-2125	EA	3/4" x 5" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	37.98	7.73
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.64*	
26 05 33 13-2126	EA	1" x 5" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	43.42	9.79
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.87*	
26 05 33 13-2127	EA	1-1/4" x 5" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	51.14	11.33
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 05 33 13-2128	EA	1-1/2" x 5" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	55.45	12.89
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	
26 05 33 13-2129	EA	2" x 5" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	63.19	14.43
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.66*	
26 05 33 13-2130	EA	2-1/2" x 5" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	94.59	17.52
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.51*	
26 05 33 13-2131	EA	3" x 5" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	119.65	24.22
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.53*	
26 05 33 13-2132	EA	3-1/2" x 5" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	135.81	27.30
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.38*	
26 05 33 13-2133	EA	4" x 5" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	160.50	35.56
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.33*	
26 05 33 13-2134	EA	5" x 5" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	236.95	48.95
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*29.37*	
26 05 33 13-2135	EA	1/2" x 6" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	35.88	6.70
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.02*	
26 05 33 13-2136	EA	3/4" x 6" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	38.56	7.73
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.64*	
26 05 33 13-2137	EA	1" x 6" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	44.04	9.79
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.87*	
26 05 33 13-2138	EA	1-1/4" x 6" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	52.29	11.33
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 05 33 13-2139	EA	1-1/2" x 6" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	56.84	12.89
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	
26 05 33 13-2140	EA	2" x 6" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	64.60	14.43
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.66*	
26 05 33 13-2141	EA	2-1/2" x 6" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	103.83	17.52
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.51*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2142	EA	3" x 6" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	129.45	24.22
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.53*	
26 05 33 13-2143	EA	3-1/2" x 6" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	144.64	27.30
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.38*	
26 05 33 13-2144	EA	4" x 6" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	175.38	35.56
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.33*	
26 05 33 13-2145	EA	5" x 6" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	259.20	48.95
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*29.37*	
26 05 33 13-2146	EA	1/2" x 8" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	36.78	6.70
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.02*	
26 05 33 13-2147	EA	3/4" x 8" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	39.44	7.73
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.64*	
26 05 33 13-2148	EA	1" x 8" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	45.43	9.79
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.87*	
26 05 33 13-2149	EA	1-1/4" x 8" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	52.59	11.33
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 05 33 13-2150	EA	1-1/2" x 8" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	59.66	12.89
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	
26 05 33 13-2151	EA	2" x 8" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	71.48	14.43
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.66*	
26 05 33 13-2152	EA	2-1/2" x 8" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	115.20	17.52
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.51*	
26 05 33 13-2153	EA	3" x 8" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	142.85	24.22
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.53*	
26 05 33 13-2154	EA	3-1/2" x 8" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	166.73	27.30
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.38*	
26 05 33 13-2155	EA	4" x 8" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	197.73	35.56
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.33*	
26 05 33 13-2156	EA	5" x 8" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	274.46	48.95
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*29.37*	
26 05 33 13-2157	EA	1/2" x 10" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	37.73	6.70
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.02*	
26 05 33 13-2158	EA	3/4" x 10" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	40.36	7.73
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.64*	
26 05 33 13-2159	EA	1" x 10" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	46.79	9.79
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.87*	
26 05 33 13-2160	EA	1-1/4" x 10" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	56.75	11.33
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 05 33 13-2161	EA	1-1/2" x 10" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	66.36	12.89
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	
26 05 33 13-2162	EA	2" x 10" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	81.60	14.43
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.66*	
26 05 33 13-2163	EA	2-1/2" x 10" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	127.22	17.52
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.51*	
26 05 33 13-2164	EA	3" x 10" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	160.02	24.22
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.53*	
26 05 33 13-2165	EA	3-1/2" x 10" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	189.93	27.30
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.38*	
26 05 33 13-2166	EA	4" x 10" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	236.83	35.56
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.33*	
26 05 33 13-2167	EA	5" x 10" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	304.89	48.95
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*29.37*	
26 05 33 13-2168	EA	1/2" x 12" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	38.70	6.70
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.02*	
26 05 33 13-2169	EA	3/4" x 12" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	41.45	7.73
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.64*	

copyright 2026 The Gordian Group, Inc.

	MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2170		EA	1" x 12" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	50.26	9.79
			For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.87*	
26 05 33 13-2171		EA	1-1/4" x 12" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	63.59	11.33
			For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 05 33 13-2172		EA	1-1/2" x 12" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	74.47	12.89
			For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	
26 05 33 13-2173		EA	2" x 12" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	89.74	14.43
			For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.66*	
26 05 33 13-2174		EA	2-1/2" x 12" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	143.25	17.52
			For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.51*	
26 05 33 13-2175		EA	3" x 12" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	185.76	24.22
			For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.53*	
26 05 33 13-2176		EA	3-1/2" x 12" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	204.16	27.30
			For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.38*	
26 05 33 13-2177		EA	4" x 12" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	248.82	35.56
			For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.33*	
26 05 33 13-2178		EA	5" x 12" Long Polyvinyl Chloride (PVC) Coated, Urethane Lined, Rigid Galvanized Steel (RGS) Nipple, Direct Burial	309.23	48.95
			For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*29.37*	

26 05 33 13-2179 Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit *(26 05 33 13-1868)*

Note: Direct burial or encased application.

26 05 33 13-2180 Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit *(26 05 33 13-2179)*

Note: Includes field bending for conduit up to and including 1". See CSI section 26 05 33 13-2329 for field bending >1".

26 05 33 13-2181		LF	1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit, Direct Burial	7.77	1.30
			For Work In Restricted Working Space, Add	*0.98*	
26 05 33 13-2182		LF	3/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit, Direct Burial	8.59	1.40
			For Work In Restricted Working Space, Add	*1.06*	
26 05 33 13-2183		LF	1" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit, Direct Burial	9.13	1.50
			For Work In Restricted Working Space, Add	*1.13*	
26 05 33 13-2184		LF	1-1/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit, Direct Burial	9.68	1.60
			For Work In Restricted Working Space, Add	*1.21*	
26 05 33 13-2185		LF	1-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit, Direct Burial	10.39	1.70
			For Work In Restricted Working Space, Add	*1.28*	
26 05 33 13-2186		LF	2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit, Direct Burial	10.80	1.80
			For Work In Restricted Working Space, Add	*1.36*	
26 05 33 13-2187		LF	2-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit, Direct Burial	12.29	1.90
			For Work In Restricted Working Space, Add	*1.43*	
26 05 33 13-2188		LF	3" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit, Direct Burial	14.05	2.00
			For Work In Restricted Working Space, Add	*1.51*	
26 05 33 13-2189		LF	3-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit, Direct Burial	15.42	2.10
			For Work In Restricted Working Space, Add	*1.58*	
26 05 33 13-2190		LF	4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit, Direct Burial	16.80	2.20
			For Work In Restricted Working Space, Add	*1.66*	
26 05 33 13-2191		LF	5" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit, Direct Burial	19.86	2.30
			For Work In Restricted Working Space, Add	*1.73*	
26 05 33 13-2192		LF	6" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit, Direct Burial	23.65	2.40
			For Work In Restricted Working Space, Add	*1.81*	

26 05 33 13-2193 Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 90 Degree Elbows, 12" Large Radius Elbows *(26 05 33 13-2179)*

26 05 33 13-2194		EA	1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 90 Degree Elbow, 12" Large Radius Elbows, Direct Burial	108.36	10.04
			For Work In Restricted Working Space, Add	*7.52*	
			For 24" Radius, Add	*7.50*	
			For 36" Radius, Add	*10.84*	
			For 48" Radius, Add	*14.17*	
26 05 33 13-2195		EA	3/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 90 Degree Elbow, 12" Large Radius Elbows, Direct Burial	123.33	12.04
			For Work In Restricted Working Space, Add	*9.03*	
			For 24" Radius, Add	*8.50*	
			For 36" Radius, Add	*12.33*	
			For 48" Radius, Add	*16.17*	
26 05 33 13-2196		EA	1" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 90 Degree Elbow, 12" Large Radius Elbows, Direct Burial	129.30	14.06
			For Work In Restricted Working Space, Add	*10.54*	
			For 24" Radius, Add	*8.82*	
			For 36" Radius, Add	*12.93*	
			For 48" Radius, Add	*17.04*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2197	EA	1-1/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 90 Degree Elbow, 12" Large Radius Elbows, Direct Burial	135.24	16.06
		For Work In Restricted Working Space, Add	*12.04*	
		For 24" Radius, Add	*9.14*	
		For 36" Radius, Add	*13.52*	
		For 48" Radius, Add	*17.91*	
26 05 33 13-2198	EA	1-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 90 Degree Elbow, 12" Large Radius Elbows, Direct Burial	141.20	18.06
		For Work In Restricted Working Space, Add	*13.55*	
		For 24" Radius, Add	*9.46*	
		For 36" Radius, Add	*14.12*	
		For 48" Radius, Add	*18.78*	
26 05 33 13-2199	EA	2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 90 Degree Elbow, 12" Large Radius Elbows, Direct Burial	159.47	20.08
		For Work In Restricted Working Space, Add	*15.05*	
		For 24" Radius, Add	*10.71*	
		For 36" Radius, Add	*15.95*	
		For 48" Radius, Add	*21.19*	
26 05 33 13-2200	EA	2-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 90 Degree Elbow, 12" Large Radius Elbows, Direct Burial	186.01	22.08
		For Work In Restricted Working Space, Add	*16.56*	
		For 24" Radius, Add	*12.57*	
		For 36" Radius, Add	*18.60*	
		For 48" Radius, Add	*24.63*	
26 05 33 13-2201	EA	3" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 90 Degree Elbow, 12" Large Radius Elbows, Direct Burial	217.19	24.08
		For Work In Restricted Working Space, Add	*18.07*	
		For 24" Radius, Add	*14.78*	
		For 36" Radius, Add	*21.72*	
		For 48" Radius, Add	*28.65*	
26 05 33 13-2202	EA	3-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 90 Degree Elbow, 12" Large Radius Elbows, Direct Burial	246.85	28.10
		For Work In Restricted Working Space, Add	*21.08*	
		For 24" Radius, Add	*16.76*	
		For 36" Radius, Add	*24.69*	
		For 48" Radius, Add	*32.61*	
26 05 33 13-2203	EA	4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 90 Degree Elbow, 12" Large Radius Elbows, Direct Burial	276.49	36.12
		For Work In Restricted Working Space, Add	*24.08*	
		For 24" Radius, Add	*18.73*	
		For 36" Radius, Add	*27.65*	
		For 48" Radius, Add	*36.57*	
26 05 33 13-2204	EA	5" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 90 Degree Elbow, 12" Large Radius Elbows, Direct Burial	335.59	36.12
		For Work In Restricted Working Space, Add	*27.10*	
		For 24" Radius, Add	*22.91*	
		For 36" Radius, Add	*33.56*	
		For 48" Radius, Add	*44.21*	
26 05 33 13-2205	EA	6" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit 90 Degree Elbow, 12" Large Radius Elbows, Direct Burial	406.94	40.14
		For Work In Restricted Working Space, Add	*30.11*	
		For 24" Radius, Add	*28.01*	
		For 36" Radius, Add	*40.69*	
		For 48" Radius, Add	*53.38*	

26 05 33 13-2206 Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Double Bell Couplings *(26 05 33 13-2179)*

26 05 33 13-2207	EA	1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Double Bell Coupling, Direct Burial	48.54	5.62
		For Work In Restricted Working Space, Add	*4.22*	
26 05 33 13-2208	EA	3/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Double Bell Coupling, Direct Burial	54.48	6.42
		For Work In Restricted Working Space, Add	*4.82*	
26 05 33 13-2209	EA	1" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Double Bell Coupling, Direct Burial	56.88	7.22
		For Work In Restricted Working Space, Add	*5.42*	
26 05 33 13-2210	EA	1-1/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Double Bell Coupling, Direct Burial	59.22	8.02
		For Work In Restricted Working Space, Add	*6.02*	
26 05 33 13-2211	EA	1-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Double Bell Coupling, Direct Burial	62.01	8.84
		For Work In Restricted Working Space, Add	*6.62*	
26 05 33 13-2212	EA	2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Double Bell Coupling, Direct Burial	71.63	9.64
		For Work In Restricted Working Space, Add	*7.22*	
26 05 33 13-2213	EA	2-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Double Bell Coupling, Direct Burial	84.33	10.84
		For Work In Restricted Working Space, Add	*8.13*	
26 05 33 13-2214	EA	3" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Double Bell Coupling, Direct Burial	98.77	12.04
		For Work In Restricted Working Space, Add	*9.03*	
26 05 33 13-2215	EA	3-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Double Bell Coupling, Direct Burial	112.38	14.06
		For Work In Restricted Working Space, Add	*10.54*	
26 05 33 13-2216	EA	4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Double Bell Coupling, Direct Burial	125.99	16.06
		For Work In Restricted Working Space, Add	*12.04*	
26 05 33 13-2217	EA	5" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Double Bell Coupling, Direct Burial	152.46	18.06
		For Work In Restricted Working Space, Add	*13.55*	
26 05 33 13-2218	EA	6" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Double Bell Coupling, Direct Burial	184.26	20.08
		For Work In Restricted Working Space, Add	*15.05*	

copyright 2026 The Gordian Group, Inc.

	MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2219			**Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Radius Double Bell Couplings** *(26 05 33 13-2179)*		
26 05 33 13-2220		EA	1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Radius Double Bell Coupling, Direct Burial	33.51	5.62
			For Work In Restricted Working Space, Add	*4.22*	
26 05 33 13-2221		EA	3/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Radius Double Bell Coupling, Direct Burial	37.68	6.42
			For Work In Restricted Working Space, Add	*4.82*	
26 05 33 13-2222		EA	1" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Radius Double Bell Coupling, Direct Burial	39.91	7.22
			For Work In Restricted Working Space, Add	*5.42*	
26 05 33 13-2223		EA	1-1/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Radius Double Bell Coupling, Direct Burial	42.16	8.02
			For Work In Restricted Working Space, Add	*6.02*	
26 05 33 13-2224		EA	1-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Radius Double Bell Coupling, Direct Burial	44.38	8.84
			For Work In Restricted Working Space, Add	*6.62*	
26 05 33 13-2225		EA	2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Radius Double Bell Coupling, Direct Burial	46.51	9.64
			For Work In Restricted Working Space, Add	*7.22*	
26 05 33 13-2226		EA	2-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Radius Double Bell Coupling, Direct Burial	54.02	10.84
			For Work In Restricted Working Space, Add	*8.13*	
26 05 33 13-2227		EA	3" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Radius Double Bell Coupling, Direct Burial	62.41	12.04
			For Work In Restricted Working Space, Add	*9.03*	
26 05 33 13-2228		EA	3-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Radius Double Bell Coupling, Direct Burial	71.47	14.06
			For Work In Restricted Working Space, Add	*10.54*	
26 05 33 13-2229		EA	4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Radius Double Bell Coupling, Direct Burial	80.53	16.06
			For Work In Restricted Working Space, Add	*12.04*	
26 05 33 13-2230		EA	5" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Radius Double Bell Coupling, Direct Burial	95.69	18.06
			For Work In Restricted Working Space, Add	*13.55*	
26 05 33 13-2231		EA	6" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Radius Double Bell Coupling, Direct Burial	113.29	20.08
			For Work In Restricted Working Space, Add	*15.05*	
26 05 33 13-2232			**Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Sleeve Couplings** *(26 05 33 13-2179)*		
26 05 33 13-2233		EA	1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Sleeve Coupling, Direct Burial	32.20	3.22
			For Work In Restricted Working Space, Add	*2.41*	
26 05 33 13-2234		EA	3/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Sleeve Coupling, Direct Burial	35.92	3.62
			For Work In Restricted Working Space, Add	*2.71*	
26 05 33 13-2235		EA	1" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Sleeve Coupling, Direct Burial	37.22	4.02
			For Work In Restricted Working Space, Add	*3.01*	
26 05 33 13-2236		EA	1-1/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Sleeve Coupling, Direct Burial	38.38	4.42
			For Work In Restricted Working Space, Add	*3.31*	
26 05 33 13-2237		EA	1-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Sleeve Coupling, Direct Burial	40.00	4.82
			For Work In Restricted Working Space, Add	*3.61*	
26 05 33 13-2238		EA	2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Sleeve Coupling, Direct Burial	47.35	5.62
			For Work In Restricted Working Space, Add	*4.22*	
26 05 33 13-2239		EA	2-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Sleeve Coupling, Direct Burial	56.99	6.82
			For Work In Restricted Working Space, Add	*5.12*	
26 05 33 13-2240		EA	3" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Sleeve Coupling, Direct Burial	67.99	8.02
			For Work In Restricted Working Space, Add	*6.02*	
26 05 33 13-2241		EA	3-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Sleeve Coupling, Direct Burial	78.97	10.04
			For Work In Restricted Working Space, Add	*7.52*	
26 05 33 13-2242		EA	4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Sleeve Coupling, Direct Burial	89.98	12.04
			For Work In Restricted Working Space, Add	*9.03*	
26 05 33 13-2243		EA	5" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Sleeve Coupling, Direct Burial	109.94	14.06
			For Work In Restricted Working Space, Add	*10.54*	
26 05 33 13-2244		EA	6" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Sleeve Coupling, Direct Burial	133.70	16.06
			For Work In Restricted Working Space, Add	*12.04*	
26 05 33 13-2245			**Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Expansion Joints** *(26 05 33 13-2179)*		
26 05 33 13-2246		EA	1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Expansion Joint, Direct Burial	76.83	20.08
			For Work In Restricted Working Space, Add	*15.05*	
26 05 33 13-2247		EA	3/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Expansion Joint, Direct Burial	89.78	24.08
			For Work In Restricted Working Space, Add	*18.07*	
26 05 33 13-2248		EA	1" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Expansion Joint, Direct Burial	100.15	28.10
			For Work In Restricted Working Space, Add	*21.08*	
26 05 33 13-2249		EA	1-1/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Expansion Joint, Direct Burial	110.37	32.12
			For Work In Restricted Working Space, Add	*24.08*	
26 05 33 13-2250		EA	1-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Expansion Joint, Direct Burial	116.07	34.12
			For Work In Restricted Working Space, Add	*25.59*	
26 05 33 13-2251		EA	2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Expansion Joint, Direct Burial	126.95	36.12
			For Work In Restricted Working Space, Add	*27.10*	
26 05 33 13-2252		EA	2-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Expansion Joint, Direct Burial	139.29	38.14
			For Work In Restricted Working Space, Add	*28.60*	
26 05 33 13-2253		EA	3" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Expansion Joint, Direct Burial	153.11	40.14
			For Work In Restricted Working Space, Add	*30.11*	
26 05 33 13-2254		EA	3-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Expansion Joint, Direct Burial	164.72	42.16
			For Work In Restricted Working Space, Add	*31.61*	
26 05 33 13-2255		EA	4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Expansion Joint, Direct Burial	176.33	44.16
			For Work In Restricted Working Space, Add	*33.12*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2256	EA	5" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Expansion Joint, Direct Burial	197.83	46.16
		For Work In Restricted Working Space, Add	*34.63*	
26 05 33 13-2257	EA	6" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Expansion Joint, Direct Burial	223.45	48.18
		For Work In Restricted Working Space, Add	*36.13*	

26 05 33 13-2258 Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion Joints *(26 05 33 13-2179)*

26 05 33 13-2259	EA	1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion Joint, Direct Burial	87.65	20.08
		For Work In Restricted Working Space, Add	*15.05*	
26 05 33 13-2260	EA	3/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion Joint, Direct Burial	101.92	24.08
		For Work In Restricted Working Space, Add	*18.07*	
26 05 33 13-2261	EA	1" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion Joint, Direct Burial	112.35	28.10
		For Work In Restricted Working Space, Add	*21.08*	
26 05 33 13-2262	EA	1-1/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion Joint, Direct Burial	122.69	32.12
		For Work In Restricted Working Space, Add	*24.08*	
26 05 33 13-2263	EA	1-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion Joint, Direct Burial	128.50	34.12
		For Work In Restricted Working Space, Add	*25.59*	
26 05 33 13-2264	EA	2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion Joint, Direct Burial	141.14	36.12
		For Work In Restricted Working Space, Add	*27.10*	
26 05 33 13-2265	EA	2-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion Joint, Direct Burial	156.33	38.14
		For Work In Restricted Working Space, Add	*28.60*	
26 05 33 13-2266	EA	3" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion Joint, Direct Burial	173.55	40.14
		For Work In Restricted Working Space, Add	*30.11*	
26 05 33 13-2267	EA	3-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion Joint, Direct Burial	187.72	42.16
		For Work In Restricted Working Space, Add	*31.61*	
26 05 33 13-2268	EA	4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion Joint, Direct Burial	201.90	44.16
		For Work In Restricted Working Space, Add	*33.12*	
26 05 33 13-2269	EA	5" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion Joint, Direct Burial	229.88	46.16
		For Work In Restricted Working Space, Add	*34.63*	
26 05 33 13-2270	EA	6" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion Joint, Direct Burial	263.51	48.18
		For Work In Restricted Working Space, Add	*36.13*	

26 05 33 13-2271 Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Adapters *(26 05 33 13-2179)*

26 05 33 13-2272	EA	1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Adapter, Direct Burial	103.17	5.62
		For Work In Restricted Working Space, Add	*4.22*	
26 05 33 13-2273	EA	3/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Adapter, Direct Burial	115.05	6.42
		For Work In Restricted Working Space, Add	*4.82*	
26 05 33 13-2274	EA	1" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Adapter, Direct Burial	120.09	7.22
		For Work In Restricted Working Space, Add	*5.42*	
26 05 33 13-2275	EA	1-1/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Adapter, Direct Burial	125.28	8.02
		For Work In Restricted Working Space, Add	*6.02*	
26 05 33 13-2276	EA	1-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Adapter, Direct Burial	128.92	8.84
		For Work In Restricted Working Space, Add	*6.62*	
26 05 33 13-2277	EA	2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Adapter, Direct Burial	141.09	9.64
		For Work In Restricted Working Space, Add	*7.22*	
26 05 33 13-2278	EA	2-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Adapter, Direct Burial	167.52	10.84
		For Work In Restricted Working Space, Add	*8.13*	
26 05 33 13-2279	EA	3" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Adapter, Direct Burial	198.52	12.04
		For Work In Restricted Working Space, Add	*9.03*	
26 05 33 13-2280	EA	3-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Adapter, Direct Burial	224.60	14.06
		For Work In Restricted Working Space, Add	*10.54*	
26 05 33 13-2281	EA	4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Adapter, Direct Burial	250.68	16.06
		For Work In Restricted Working Space, Add	*12.04*	
26 05 33 13-2282	EA	5" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Adapter, Direct Burial	308.41	18.06
		For Work In Restricted Working Space, Add	*13.55*	
26 05 33 13-2283	EA	6" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit Adapter, Direct Burial	377.20	20.08
		For Work In Restricted Working Space, Add	*15.05*	

26 05 33 13-2284 Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion/Deflection Joints *(26 05 33 13-2179)*

26 05 33 13-2285	EA	1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion/Deflection Joint, Direct Burial	106.48	20.08
		For Work In Restricted Working Space, Add	*15.05*	
26 05 33 13-2286	EA	3/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion/Deflection Joint, Direct Burial	122.78	24.08
		For Work In Restricted Working Space, Add	*18.07*	
26 05 33 13-2287	EA	1" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion/Deflection Joint, Direct Burial	147.54	28.10
		For Work In Restricted Working Space, Add	*21.08*	
26 05 33 13-2288	EA	1-1/4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion/Deflection Joint, Direct Burial	184.48	32.12
		For Work In Restricted Working Space, Add	*24.08*	
26 05 33 13-2289	EA	1-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion/Deflection Joint, Direct Burial	228.14	34.12
		For Work In Restricted Working Space, Add	*25.59*	
26 05 33 13-2290	EA	2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion/Deflection Joint, Direct Burial	302.01	36.12
		For Work In Restricted Working Space, Add	*27.10*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2291	EA	2-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion/Deflection Joint, Direct Burial	428.45	38.14
		For Work In Restricted Working Space, Add	*28.60*	
26 05 33 13-2292	EA	3" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion/Deflection Joint, Direct Burial	513.41	40.14
		For Work In Restricted Working Space, Add	*30.11*	
26 05 33 13-2293	EA	3-1/2" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion/Deflection Joint, Direct Burial	613.37	42.16
		For Work In Restricted Working Space, Add	*31.61*	
26 05 33 13-2294	EA	4" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion/Deflection Joint, Direct Burial	713.33	44.16
		For Work In Restricted Working Space, Add	*33.12*	
26 05 33 13-2295	EA	5" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion/Deflection Joint, Direct Burial	831.60	46.16
		For Work In Restricted Working Space, Add	*34.63*	
26 05 33 13-2296	EA	6" Fiberglass Reinforced Epoxy (FRE) Standard Wall (SW) Conduit O-Ring Expansion/Deflection Joint, Direct Burial	1,336.28	48.18
		For Work In Restricted Working Space, Add	*36.13*	

26 05 33 13-2297 Spacers *(26 05 33 13-1868)*

Note: For concrete encasement applications. See CSI section 26 05 33 13-1868 for conduit.

26 05 33 13-2298	EA	1" Base Spacers, Average 4" Wide, Direct Burial	10.80
26 05 33 13-2299	EA	1" Intermediate Spacers, Average 4" Wide, Direct Burial	11.57
26 05 33 13-2300	EA	1-1/4" Base Spacer, Average 4" Wide, Direct Burial	12.82
26 05 33 13-2301	EA	1-1/4" Intermediate Spacers, Average 4" Wide, Direct Burial	13.77
26 05 33 13-2302	EA	1-1/2" Base Spacer, Average 4" Wide, Direct Burial	12.95
26 05 33 13-2303	EA	1-1/2" Intermediate Spacers, Average 4" Wide, Direct Burial	13.86
26 05 33 13-2304	EA	2" Base Spacer, Average 4" Wide, Direct Burial	16.03
26 05 33 13-2305	EA	2" Intermediate Spacers, Average 4" Wide, Direct Burial	14.88
26 05 33 13-2306	EA	2-1/2" Base Spacer, Average 4" Wide, Direct Burial	17.70
26 05 33 13-2307	EA	2-1/2" Intermediate Spacers, Average 4" Wide, Direct Burial	17.12
26 05 33 13-2308	EA	3" Base Spacer, Average 4" Wide, Direct Burial	20.21
26 05 33 13-2309	EA	3" Intermediate Spacers, Average 4" Wide, Direct Burial	19.33
26 05 33 13-2310	EA	3-1/2" Base Spacer, Average 4" Wide, Direct Burial	21.91
26 05 33 13-2311	EA	3-1/2" Intermediate Spacers, Average 4" Wide, Direct Burial	20.96
26 05 33 13-2312	EA	4" Base Spacer, Average 4" Wide, Direct Burial	22.59
26 05 33 13-2313	EA	4" Intermediate Spacers, Average 4" Wide, Direct Burial	21.55
26 05 33 13-2314	EA	5" Base Spacer, Average 4" Wide, Direct Burial	24.99
26 05 33 13-2315	EA	5" Intermediate Spacers, Average 4" Wide, Direct Burial	23.76
26 05 33 13-2316	EA	6" Base Spacer, Average 4" Wide, Direct Burial	28.33
26 05 33 13-2317	EA	6" Intermediate Spacers, Average 4" Wide, Direct Burial	27.30

26 05 33 13-2318 Conduit Field Bending *(26 05 33 13-0058)*

Note: Conduit tasks by LF include field bending up to and include 1" conduit.

26 05 33 13-2319 Metallic Conduit Field Bending *(26 05 33 13-2318)*

Note: For use with Rigid Galvanized Steel (RGS), Electrical Metallic Tubing (EMT), and Intermediate Metal Conduit (IMC).

26 05 33 13-2320	EA	1-1/4" Metallic Conduit Field Bending	18.59
		For Aluminum Conduit Bending, Add	*12.27*
26 05 33 13-2321	EA	1-1/2" Metallic Conduit Field Bending	23.22
		For Aluminum Conduit Bending, Add	*15.33*
26 05 33 13-2322	EA	2" Metallic Conduit Field Bending	29.04
		For Aluminum Conduit Bending, Add	*19.17*
26 05 33 13-2323	EA	2-1/2" Metallic Conduit Field Bending	40.65
		For Aluminum Conduit Bending, Add	*26.83*
26 05 33 13-2324	EA	3" Metallic Conduit Field Bending	52.26
		For Aluminum Conduit Bending, Add	*34.49*
26 05 33 13-2325	EA	3-1/2" Metallic Conduit Field Bending	69.68
		For Aluminum Conduit Bending, Add	*45.99*
26 05 33 13-2326	EA	4" Metallic Conduit Field Bending	81.30
		For Aluminum Conduit Bending, Add	*53.66*
26 05 33 13-2327	EA	5" Metallic Conduit Field Bending	92.91
		For Aluminum Conduit Bending, Add	*61.32*
26 05 33 13-2328	EA	6" Metallic Conduit Field Bending	110.33
		For Aluminum Conduit Bending, Add	*72.82*

26 05 33 13-2329 Plastic Conduit Field Bending *(26 05 33 13-2318)*

Note: For PVC conduits.

26 05 33 13-2330	EA	1" Plastic Conduit Field Bending	26.71
26 05 33 13-2331	EA	1-1/4" Plastic Conduit Field Bending	29.04
26 05 33 13-2332	EA	1-1/2" Plastic Conduit Field Bending	34.84
26 05 33 13-2333	EA	2" Plastic Conduit Field Bending	46.46
26 05 33 13-2334	EA	2-1/2" Plastic Conduit Field Bending	58.07
26 05 33 13-2335	EA	3" Plastic Conduit Field Bending	69.68
26 05 33 13-2336	EA	3-1/2" Plastic Conduit Field Bending	81.30
26 05 33 13-2337	EA	4" Plastic Conduit Field Bending	92.91
26 05 33 13-2338	EA	5" Plastic Conduit Field Bending	104.52
26 05 33 13-2339	EA	6" Plastic Conduit Field Bending	116.13

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2340		Cut And Thread Existing In-Place Threaded Conduit *(26 05 33 13-0058)*		
		Note: For use when connecting conduit to an existing in-place system.		
26 05 33 13-2341	EA	1/2", Cut And Thread Existing In-Place Threaded Conduit	33.90	
		For Work In Restricted Working Space, Add	*10.17*	
26 05 33 13-2342	EA	3/4", Cut And Thread Existing In-Place Threaded Conduit	37.29	
		For Work In Restricted Working Space, Add	*11.19*	
26 05 33 13-2343	EA	1", Cut And Thread Existing In-Place Threaded Conduit	40.68	
		For Work In Restricted Working Space, Add	*12.20*	
26 05 33 13-2344	EA	1-1/4", Cut And Thread Existing In-Place Threaded Conduit	44.07	
		For Work In Restricted Working Space, Add	*13.22*	
26 05 33 13-2345	EA	1-1/2", Cut And Thread Existing In-Place Threaded Conduit	46.33	
		For Work In Restricted Working Space, Add	*13.90*	
26 05 33 13-2346	EA	2", Cut And Thread Existing In-Place Threaded Conduit	48.59	
		For Work In Restricted Working Space, Add	*14.58*	
26 05 33 13-2347	EA	2-1/2", Cut And Thread Existing In-Place Threaded Conduit	50.85	
		For Work In Restricted Working Space, Add	*15.26*	
26 05 33 13-2348	EA	3", Cut And Thread Existing In-Place Threaded Conduit	53.11	
		For Work In Restricted Working Space, Add	*15.93*	
26 05 33 13-2349	EA	3-1/2", Cut And Thread Existing In-Place Threaded Conduit	54.24	
		For Work In Restricted Working Space, Add	*16.27*	
26 05 33 13-2350	EA	4", Cut And Thread Existing In-Place Threaded Conduit	55.37	
		For Work In Restricted Working Space, Add	*16.61*	
26 05 33 13-2351	EA	5", Cut And Thread Existing In-Place Threaded Conduit	57.63	
		For Work In Restricted Working Space, Add	*17.29*	
26 05 33 13-2352	EA	6", Cut And Thread Existing In-Place Threaded Conduit	59.89	
		For Work In Restricted Working Space, Add	*17.97*	
26 05 33 13-2353		Flexible Conduit *(26 05 33 13-0058)*		
26 05 33 13-2354		Flexible Liquid Tight Metallic Conduit And Connectors *(26 05 33 13-2353)*		
		Note: Steel inner core with PVC cover.		
26 05 33 13-2355		Flexible Liquid Tight Metallic Conduit *(26 05 33 13-2354)*		
26 05 33 13-2356	LF	3/8" Flexible Liquid Tight Metallic Conduit	4.59	1.23
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*0.46*	
		For Work In Restricted Working Space, Add	*0.93*	
26 05 33 13-2357	LF	1/2" Flexible Liquid Tight Metallic Conduit	4.81	1.23
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*0.46*	
		For Work In Restricted Working Space, Add	*0.93*	
26 05 33 13-2358	LF	3/4" Flexible Liquid Tight Metallic Conduit	6.45	1.64
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*0.62*	
		For Work In Restricted Working Space, Add	*1.24*	
26 05 33 13-2359	LF	1" Flexible Liquid Tight Metallic Conduit	7.64	1.64
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*0.62*	
		For Work In Restricted Working Space, Add	*1.24*	
26 05 33 13-2360	LF	1-1/4" Flexible Liquid Tight Metallic Conduit	9.95	2.07
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*0.77*	
		For Work In Restricted Working Space, Add	*1.55*	
26 05 33 13-2361	LF	1-1/2" Flexible Liquid Tight Metallic Conduit	12.92	2.48
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*0.93*	
		For Work In Restricted Working Space, Add	*1.86*	
26 05 33 13-2362	LF	2" Flexible Liquid Tight Metallic Conduit	16.95	3.30
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*1.24*	
		For Work In Restricted Working Space, Add	*2.47*	
26 05 33 13-2363	LF	2-1/2" Flexible Liquid Tight Metallic Conduit	23.67	3.71
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*1.39*	
		For Work In Restricted Working Space, Add	*2.78*	
26 05 33 13-2364	LF	3" Flexible Liquid Tight Metallic Conduit	35.53	4.53
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*1.70*	
		For Work In Restricted Working Space, Add	*3.40*	
26 05 33 13-2365	LF	4" Flexible Liquid Tight Metallic Conduit	48.97	5.78
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*2.16*	
		For Work In Restricted Working Space, Add	*4.33*	
26 05 33 13-2366		Straight Liquid Tight Connector *(26 05 33 13-2354)*		
26 05 33 13-2367	EA	3/8" Straight Liquid Tight Connector	12.51	3.30
		For Work In Restricted Working Space, Add	*2.47*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.47*	
26 05 33 13-2368	EA	1/2" Straight Liquid Tight Connector	12.51	3.30
		For Work In Restricted Working Space, Add	*2.47*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.47*	
26 05 33 13-2369	EA	3/4" Straight Liquid Tight Connector	15.40	3.71
		For Work In Restricted Working Space, Add	*2.78*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.78*	
26 05 33 13-2370	EA	1" Straight Liquid Tight Connector	21.22	4.12
		For Work In Restricted Working Space, Add	*3.09*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.09*	
26 05 33 13-2371	EA	1-1/4" Straight Liquid Tight Connector	27.83	4.53
		For Work In Restricted Working Space, Add	*3.40*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.40*	
26 05 33 13-2372	EA	1-1/2" Straight Liquid Tight Connector	35.90	4.94
		For Work In Restricted Working Space, Add	*3.71*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.71*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2373	EA	2" Straight Liquid Tight Connector	50.29	5.78
		For Work In Restricted Working Space, Add	*4.33*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.33*	
26 05 33 13-2374	EA	2-1/2" Straight Liquid Tight Connector	181.35	7.42
		For Work In Restricted Working Space, Add	*5.57*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.57*	
26 05 33 13-2375	EA	3" Straight Liquid Tight Connector	235.18	7.83
		For Work In Restricted Working Space, Add	*5.87*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.87*	
26 05 33 13-2376	EA	4" Straight Liquid Tight Connector	286.34	11.54
		For Work In Restricted Working Space, Add	*8.66*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.66*	

26 05 33 13-2377 90 Degree Angle Liquid Tight Connector *(26 05 33 13-2354)*

26 05 33 13-2378	EA	3/8" 90 Degree Angle Liquid Tight Connector	18.46	4.53
		For Work In Restricted Working Space, Add	*3.40*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.40*	
26 05 33 13-2379	EA	1/2" 90 Degree Angle Liquid Tight Connector	19.38	4.53
		For Work In Restricted Working Space, Add	*3.40*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.40*	
26 05 33 13-2380	EA	3/4" 90 Degree Angle Liquid Tight Connector	22.04	4.94
		For Work In Restricted Working Space, Add	*3.71*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.71*	
26 05 33 13-2381	EA	1" 90 Degree Angle Liquid Tight Connector	32.03	5.78
		For Work In Restricted Working Space, Add	*4.33*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.33*	
26 05 33 13-2382	EA	1-1/4" 90 Degree Angle Liquid Tight Connector	41.20	6.19
		For Work In Restricted Working Space, Add	*4.64*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.64*	
26 05 33 13-2383	EA	1-1/2" 90 Degree Angle Liquid Tight Connector	50.68	6.60
		For Work In Restricted Working Space, Add	*4.95*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.95*	
26 05 33 13-2384	EA	2" 90 Degree Angle Liquid Tight Connector	68.05	7.42
		For Work In Restricted Working Space, Add	*5.57*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.57*	
26 05 33 13-2385	EA	2-1/2" 90 Degree Angle Liquid Tight Connector	255.33	7.83
		For Work In Restricted Working Space, Add	*5.87*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.87*	
26 05 33 13-2386	EA	3" 90 Degree Angle Liquid Tight Connector	301.84	9.06
		For Work In Restricted Working Space, Add	*6.80*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.80*	
26 05 33 13-2387	EA	4" 90 Degree Angle Liquid Tight Connector	416.09	14.43
		For Work In Restricted Working Space, Add	*10.82*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.82*	

26 05 33 13-2388 45 Degree Angle Connector *(26 05 33 13-2354)*

26 05 33 13-2389	EA	3/8" 45 Degree Angle Liquid Tight Connector	18.15	4.53
		For Work In Restricted Working Space, Add	*3.40*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.40*	
26 05 33 13-2390	EA	1/2" 45 Degree Angle Liquid Tight Connector	18.37	4.53
		For Work In Restricted Working Space, Add	*3.40*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.40*	
26 05 33 13-2391	EA	3/4" 45 Degree Angle Liquid Tight Connector	22.04	4.94
		For Work In Restricted Working Space, Add	*3.71*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.71*	
26 05 33 13-2392	EA	1" 45 Degree Angle Liquid Tight Connector	34.54	5.78
		For Work In Restricted Working Space, Add	*4.33*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.33*	
26 05 33 13-2393	EA	1-1/4" 45 Degree Angle Liquid Tight Connector	39.57	6.19
		For Work In Restricted Working Space, Add	*4.64*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.64*	
26 05 33 13-2394	EA	1-1/2" 45 Degree Angle Liquid Tight Connector	44.61	6.60
		For Work In Restricted Working Space, Add	*4.95*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.95*	

26 05 33 13-2395 Flexible Metallic Conduit And Connectors *(26 05 33 13-2353)*

26 05 33 13-2396 Flexible Steel Conduit *(26 05 33 13-2395)*

26 05 33 13-2397	LF	3/8" Flexible Metallic Conduit	4.19	1.35
		For Flexible Aluminum Conduit, Add	*0.15*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*0.50*	
		For Installation In Metal Stud Wall, Add	*0.33*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*0.83*	
		For Work In Restricted Working Space, Add	*0.99*	
26 05 33 13-2398	LF	1/2" Flexible Metallic Conduit	4.35	1.35
		For Flexible Aluminum Conduit, Add	*0.16*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*0.51*	
		For Installation In Metal Stud Wall, Add	*0.34*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*0.85*	
		For Work In Restricted Working Space, Add	*1.02*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2399	LF	3/4" Flexible Metallic Conduit	4.98	1.80
		For Flexible Aluminum Conduit, Add	*0.22*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*0.55*	
		For Installation In Metal Stud Wall, Add	*0.37*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*0.92*	
		For Work In Restricted Working Space, Add	*1.10*	
26 05 33 13-2400	LF	1" Flexible Metallic Conduit	6.40	1.80
		For Flexible Aluminum Conduit, Add	*0.40*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*0.59*	
		For Installation In Metal Stud Wall, Add	*0.40*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*0.99*	
		For Work In Restricted Working Space, Add	*1.19*	
26 05 33 13-2401	LF	1-1/4" Flexible Metallic Conduit	7.37	2.26
		For Flexible Aluminum Conduit, Add	*0.53*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*0.63*	
		For Installation In Metal Stud Wall, Add	*0.42*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*1.04*	
		For Work In Restricted Working Space, Add	*1.25*	
26 05 33 13-2402	LF	1-1/2" Flexible Metallic Conduit	9.95	2.71
		For Flexible Aluminum Conduit, Add	*0.93*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*0.65*	
		For Installation In Metal Stud Wall, Add	*0.43*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*1.09*	
		For Work In Restricted Working Space, Add	*1.30*	
26 05 33 13-2403	LF	2" Flexible Metallic Conduit	11.39	3.61
		For Flexible Aluminum Conduit, Add	*1.14*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*0.68*	
		For Installation In Metal Stud Wall, Add	*0.45*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*1.13*	
		For Work In Restricted Working Space, Add	*1.35*	
26 05 33 13-2404	LF	2-1/2" Flexible Steel Conduit	13.96	4.06
		For Flexible Aluminum Conduit, Add	*1.37*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*0.85*	
		For Installation In Metal Stud Wall, Add	*0.56*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*1.41*	
		For Work In Restricted Working Space, Add	*1.69*	
26 05 33 13-2405	LF	3" Flexible Metallic Conduit	21.23	4.96
		For Flexible Aluminum Conduit, Add	*2.39*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*1.02*	
		For Installation In Metal Stud Wall, Add	*0.68*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*1.69*	
		For Work In Restricted Working Space, Add	*2.03*	
26 05 33 13-2406	LF	3-1/2" Flexible Metallic Conduit	26.12	5.41
		For Flexible Aluminum Conduit, Add	*3.01*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*1.19*	
		For Installation In Metal Stud Wall, Add	*0.79*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*1.98*	
		For Work In Restricted Working Space, Add	*2.37*	
26 05 33 13-2407	LF	4" Flexible Metallic Conduit	30.05	6.32
		For Flexible Aluminum Conduit, Add	*3.47*	
		For Installation In Concrete Beam, Slab, etc. (Excludes Concrete), Add	*1.35*	
		For Installation In Metal Stud Wall, Add	*0.90*	
		For Installation In Wood Stud Wall (Includes Drilling), Add	*2.26*	
		For Work In Restricted Working Space, Add	*2.71*	

26 05 33 13-2408 Plain Squeeze Type Straight Connector *(26 05 33 13-2395)*

26 05 33 13-2409	EA	3/8" Flexible Straight Connectors, Plain	7.29	3.61
		For Work In Restricted Working Space, Add	*1.52*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1.52*	
26 05 33 13-2410	EA	1/2" Flexible Straight Connectors, Plain	9.16	4.06
		For Work In Restricted Working Space, Add	*1.69*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1.69*	
26 05 33 13-2411	EA	3/4" Flexible Straight Connectors, Plain	10.48	4.96
		For Work In Restricted Working Space, Add	*2.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.03*	
26 05 33 13-2412	EA	1" Flexible Straight Connectors, Plain	17.16	5.41
		For Work In Restricted Working Space, Add	*2.71*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.71*	
26 05 33 13-2413	EA	1-1/4" Flexible Straight Connectors, Plain	24.61	6.32
		For Work In Restricted Working Space, Add	*3.38*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.38*	
26 05 33 13-2414	EA	1-1/2" Flexible Straight Connectors, Plain	32.61	7.67
		For Work In Restricted Working Space, Add	*4.23*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.23*	
26 05 33 13-2415	EA	2" Flexible Straight Connectors, Plain	43.24	7.67
		For Work In Restricted Working Space, Add	*5.08*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.08*	
26 05 33 13-2416	EA	2-1/2" Flexible Straight Connectors, Plain	71.44	9.47
		For Work In Restricted Working Space, Add	*5.92*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.92*	
26 05 33 13-2417	EA	3" Flexible Straight Connectors, Plain	94.24	10.37
		For Work In Restricted Working Space, Add	*6.77*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.77*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2418	EA	3-1/2" Flexible Straight Connectors, Plain	302.59	12.18
		For Work In Restricted Working Space, Add	*7.61*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.61*	
26 05 33 13-2419	EA	4" Flexible Straight Connectors, Plain	378.90	14.89
		For Work In Restricted Working Space, Add	*8.46*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.46*	
26 05 33 13-2420		**Insulated Throat Squeeze Type Straight Connector** *(26 05 33 13-2395)*		
26 05 33 13-2421	EA	1/2" Flexible Straight Connectors, Insulated	10.37	4.06
		For Work In Restricted Working Space, Add	*1.69*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1.69*	
26 05 33 13-2422	EA	3/4" Flexible Straight Connectors, Insulated	12.07	4.96
		For Work In Restricted Working Space, Add	*2.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.03*	
26 05 33 13-2423	EA	1" Flexible Straight Connectors, Insulated	19.33	5.41
		For Work In Restricted Working Space, Add	*2.71*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.71*	
26 05 33 13-2424	EA	1-1/4" Flexible Straight Connectors, Insulated	28.59	6.32
		For Work In Restricted Working Space, Add	*3.38*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.38*	
26 05 33 13-2425	EA	1-1/2" Flexible Straight Connectors, Insulated	39.68	6.77
		For Work In Restricted Working Space, Add	*4.23*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.23*	
26 05 33 13-2426	EA	2" Flexible Straight Connectors, Insulated	55.73	7.67
		For Work In Restricted Working Space, Add	*5.08*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.08*	
26 05 33 13-2427	EA	2-1/2" Flexible Straight Connectors, Insulated	98.17	9.47
		For Work In Restricted Working Space, Add	*5.92*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.92*	
26 05 33 13-2428	EA	3" Flexible Straight Connectors, Insulated	125.75	10.37
		For Work In Restricted Working Space, Add	*6.77*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.77*	
26 05 33 13-2429	EA	3-1/2" Flexible Straight Connectors, Insulated	351.17	12.18
		For Work In Restricted Working Space, Add	*7.61*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.61*	
26 05 33 13-2430	EA	4" Flexible Straight Connectors, Insulated	451.93	14.89
		For Work In Restricted Working Space, Add	*8.46*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.46*	
26 05 33 13-2431		**Plain Squeeze Type 90 Degree Connector** *(26 05 33 13-2395)*		
26 05 33 13-2432	EA	3/8" Flexible 90 Degree Connector, Plain	10.32	4.51
		For Work In Restricted Working Space, Add	*2.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.03*	
26 05 33 13-2433	EA	1/2" Flexible 90 Degree Connector, Plain	13.85	4.96
		For Work In Restricted Working Space, Add	*2.37*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.37*	
26 05 33 13-2434	EA	3/4" Flexible 90 Degree Connector, Plain	18.33	5.41
		For Work In Restricted Working Space, Add	*2.71*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.71*	
26 05 33 13-2435	EA	1" Flexible 90 Degree Connector, Plain	25.97	6.32
		For Work In Restricted Working Space, Add	*3.38*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.38*	
26 05 33 13-2436	EA	1-1/4" Flexible 90 Degree Connector, Plain	41.42	6.77
		For Work In Restricted Working Space, Add	*4.06*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.06*	
26 05 33 13-2437	EA	1-1/2" Flexible 90 Degree Connector, Plain	65.67	7.90
		For Work In Restricted Working Space, Add	*5.08*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.08*	
26 05 33 13-2438	EA	2" Flexible 90 Degree Connector, Plain	79.47	9.70
		For Work In Restricted Working Space, Add	*5.75*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.75*	
26 05 33 13-2439	EA	2-1/2" Flexible 90 Degree Connector, Plain	179.70	10.37
		For Work In Restricted Working Space, Add	*6.77*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.77*	
26 05 33 13-2440	EA	3" Flexible 90 Degree Connector, Plain	231.68	12.18
		For Work In Restricted Working Space, Add	*7.61*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.61*	
26 05 33 13-2441	EA	3-1/2" Flexible 90 Degree Connector, Plain	497.35	14.89
		For Work In Restricted Working Space, Add	*8.46*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.46*	
26 05 33 13-2442	EA	4" Flexible 90 Degree Connector, Plain	892.32	16.92
		For Work In Restricted Working Space, Add	*10.15*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.15*	
26 05 33 13-2443		**Insulated Throat Squeeze Type 90 Degree Connector** *(26 05 33 13-2395)*		
26 05 33 13-2444	EA	1/2" Flexible 90 Degree Connector, Insulated	15.53	4.96
		For Work In Restricted Working Space, Add	*2.37*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.37*	
26 05 33 13-2445	EA	3/4" Flexible 90 Degree Connector, Insulated	20.40	5.41
		For Work In Restricted Working Space, Add	*2.71*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.71*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2446	EA	1" Flexible 90 Degree Connector, Insulated	25.97	6.32
		For Work In Restricted Working Space, Add	*3.38*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.38*	
26 05 33 13-2447	EA	1-1/4" Flexible 90 Degree Connector, Insulated	48.80	6.77
		For Work In Restricted Working Space, Add	*4.06*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.06*	
26 05 33 13-2448	EA	1-1/2" Flexible 90 Degree Connector, Insulated	79.06	7.90
		For Work In Restricted Working Space, Add	*5.08*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.08*	
26 05 33 13-2449	EA	2" Flexible 90 Degree Connector, Insulated	101.24	9.70
		For Work In Restricted Working Space, Add	*5.75*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.75*	
26 05 33 13-2450	EA	2-1/2" Flexible 90 Degree Connector, Insulated	247.76	10.37
		For Work In Restricted Working Space, Add	*6.77*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.77*	
26 05 33 13-2451	EA	3" Flexible 90 Degree Connector, Insulated	305.41	12.18
		For Work In Restricted Working Space, Add	*7.61*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.61*	
26 05 33 13-2452	EA	3-1/2" Flexible 90 Degree Connector, Insulated	831.54	14.89
		For Work In Restricted Working Space, Add	*8.46*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.46*	
26 05 33 13-2453	EA	4" Flexible 90 Degree Connector, Insulated	1,242.35	16.92
		For Work In Restricted Working Space, Add	*10.15*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.15*	

26 05 33 13-2454 Plain Squeeze Type 45 Degree Connector *(26 05 33 13-2395)*

26 05 33 13-2455	EA	3/8" Flexible 45 Degree Connector, Plain	11.68	4.51
		For Work In Restricted Working Space, Add	*2.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.03*	
26 05 33 13-2456	EA	1/2" Flexible 45 Degree Connector, Plain	16.02	4.96
		For Work In Restricted Working Space, Add	*2.37*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.37*	
26 05 33 13-2457	EA	3/4" Flexible 45 Degree Connector, Plain	20.76	5.41
		For Work In Restricted Working Space, Add	*2.71*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.71*	

26 05 33 13-2458 Insulated Squeeze Type 45 Degree Connector *(26 05 33 13-2395)*

26 05 33 13-2459	EA	3/8" Flexible 45 Degree Connector, Insulated	12.62	5.41
		For Work In Restricted Working Space, Add	*2.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.03*	
26 05 33 13-2460	EA	1/2" Flexible 45 Degree Connector, Insulated	17.56	4.96
		For Work In Restricted Working Space, Add	*2.37*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.37*	
26 05 33 13-2461	EA	3/4" Flexible 45 Degree Connector, Insulated	22.93	5.41
		For Work In Restricted Working Space, Add	*2.71*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.71*	

26 05 33 13-2462 Plain Screw-In Connector *(26 05 33 13-2395)*

26 05 33 13-2463	EA	3/8" Flexible Steel Screw-in Connector, Plain	5.89	3.61
		For Work In Restricted Working Space, Add	*1.52*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1.52*	
26 05 33 13-2464	EA	1/2" Flexible Steel Screw-in Connector, Plain	6.32	4.06
		For Work In Restricted Working Space, Add	*1.69*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1.69*	
26 05 33 13-2465	EA	3/4" Flexible Steel Screw-in Connector, Plain	8.15	4.96
		For Work In Restricted Working Space, Add	*2.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.03*	
26 05 33 13-2466	EA	1" Flexible Steel Screw-in Connector, Plain	11.80	5.41
		For Work In Restricted Working Space, Add	*2.71*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.71*	
26 05 33 13-2467	EA	1-1/4" Flexible Steel Screw-in Connector, Plain	17.78	6.32
		For Work In Restricted Working Space, Add	*3.38*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.38*	
26 05 33 13-2468	EA	1-1/2" Flexible Steel Screw-in Connector, Plain	21.67	6.77
		For Work In Restricted Working Space, Add	*4.23*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.23*	
26 05 33 13-2469	EA	2" Flexible Steel Screw-in Connector, Plain	32.64	7.67
		For Work In Restricted Working Space, Add	*5.08*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.08*	

26 05 33 13-2470 Insulated Screw-In Connector *(26 05 33 13-2395)*

26 05 33 13-2471	EA	3/8" Flexible Steel Screw-in Connector, Insulated	6.29	3.61
		For Work In Restricted Working Space, Add	*1.52*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1.52*	
26 05 33 13-2472	EA	1/2" Flexible Steel Screw-in Connector, Insulated	6.64	4.06
		For Work In Restricted Working Space, Add	*1.69*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1.69*	
26 05 33 13-2473	EA	3/4" Flexible Steel Screw-in Connector, Insulated	8.98	4.96
		For Work In Restricted Working Space, Add	*2.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.03*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2474	EA	1" Flexible Steel Screw-in Connector, Insulated	13.05	5.41
		For Work In Restricted Working Space, Add	*2.71*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.71*	
26 05 33 13-2475	EA	1-1/4" Flexible Steel Screw-in Connector, Insulated	19.57	6.32
		For Work In Restricted Working Space, Add	*3.38*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.38*	
26 05 33 13-2476	EA	1-1/2" Flexible Steel Screw-in Connector, Insulated	23.82	6.77
		For Work In Restricted Working Space, Add	*4.23*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.23*	
26 05 33 13-2477	EA	2" Flexible Steel Screw-in Connector, Insulated	34.53	7.67
		For Work In Restricted Working Space, Add	*5.08*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.08*	

26 05 33 13-2478 Screw-In Coupling *(26 05 33 13-2395)*

26 05 33 13-2479	EA	1/2" Flexible Steel Screw-in Coupling	7.11	4.06
		For Work In Restricted Working Space, Add	*1.69*	
26 05 33 13-2480	EA	3/4" Flexible Steel Screw-in Coupling	9.45	4.96
		For Work In Restricted Working Space, Add	*2.03*	

26 05 33 13-2481 Flexible To Electrical Metallic Tubing (EMT) Coupling *(26 05 33 13-2395)*

26 05 33 13-2482	EA	3/8" Flexible Steel To Electrical Metallic Tubing (EMT) Coupling	10.07	3.61
		For Work In Restricted Working Space, Add	*1.52*	
26 05 33 13-2483	EA	1/2" Flexible Steel To Electrical Metallic Tubing (EMT) Coupling	13.97	4.06
		For Work In Restricted Working Space, Add	*1.69*	
26 05 33 13-2484	EA	3/4" Flexible Steel To Electrical Metallic Tubing (EMT) Coupling	18.62	4.96
		For Work In Restricted Working Space, Add	*2.03*	

26 05 33 13-2485 Die Cast Squeeze Type Straight Connector *(26 05 33 13-2395)*

26 05 33 13-2486	EA	3/8" Flexible Straight Connector, Die Cast	6.14	3.61
		For Work In Restricted Working Space, Add	*1.52*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1.52*	
26 05 33 13-2487	EA	1/2" Flexible Straight Connector, Die Cast	6.97	4.06
		For Work In Restricted Working Space, Add	*1.69*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1.69*	
26 05 33 13-2488	EA	3/4" Flexible Straight Connector, Die Cast	8.71	4.96
		For Work In Restricted Working Space, Add	*2.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.03*	
26 05 33 13-2489	EA	1" Flexible Straight Connector, Die Cast	13.34	5.41
		For Work In Restricted Working Space, Add	*2.71*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.71*	
26 05 33 13-2490	EA	1-1/4" Flexible Straight Connector, Die Cast	18.16	6.32
		For Work In Restricted Working Space, Add	*3.38*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.38*	
26 05 33 13-2491	EA	1-1/2" Flexible Straight Connector, Die Cast	24.90	6.77
		For Work In Restricted Working Space, Add	*4.23*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.23*	
26 05 33 13-2492	EA	2" Flexible Straight Connector, Die Cast	32.46	7.67
		For Work In Restricted Working Space, Add	*5.08*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.08*	

26 05 33 13-2493 Die Cast Squeeze Type 90 Degree Connector *(26 05 33 13-2395)*

26 05 33 13-2494	EA	3/8" Flexible 90 Degree Connector, Die Cast	8.13	4.51
		For Work In Restricted Working Space, Add	*2.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.03*	
26 05 33 13-2495	EA	1/2" Flexible 90 Degree Connector, Die Cast	10.19	4.96
		For Work In Restricted Working Space, Add	*2.37*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.37*	
26 05 33 13-2496	EA	3/4" Flexible 90 Degree Connector, Die Cast	12.47	5.41
		For Work In Restricted Working Space, Add	*2.71*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.71*	
26 05 33 13-2497	EA	1" Flexible 90 Degree Connector, Die Cast	20.40	6.32
		For Work In Restricted Working Space, Add	*3.38*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.38*	
26 05 33 13-2498	EA	1-1/4" Flexible 90 Degree Connector, Die Cast	29.45	6.77
		For Work In Restricted Working Space, Add	*4.06*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.06*	
26 05 33 13-2499	EA	1-1/2" Flexible 90 Degree Connector, Die Cast	46.63	7.90
		For Work In Restricted Working Space, Add	*5.08*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.08*	
26 05 33 13-2500	EA	2" Flexible 90 Degree Connector, Die Cast	55.98	9.70
		For Work In Restricted Working Space, Add	*5.75*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.75*	

26 05 33 13-2501 Flexible Liquid Tight Non-Metallic Conduit And Connectors *(26 05 33 13-2353)*

26 05 33 13-2502 Flexible Liquid Tight Non-Metallic Conduit *(26 05 33 13-2501)*

26 05 33 13-2503	LF	3/8" Flexible Liquid Tight Non-Metallic Conduit	4.29	1.23
		For Work In Restricted Working Space, Add	*0.93*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2504	LF	1/2" Flexible Liquid Tight Non-Metallic Conduit	4.39	1.23
		For Work In Restricted Working Space, Add	*0.93*	
26 05 33 13-2505	LF	3/4" Flexible Liquid Tight Non-Metallic Conduit	5.92	1.64
		For Work In Restricted Working Space, Add	*1.24*	
26 05 33 13-2506	LF	1" Flexible Liquid Tight Non-Metallic Conduit	7.75	1.64
		For Work In Restricted Working Space, Add	*1.24*	
26 05 33 13-2507	LF	1-1/4" Flexible Liquid Tight Non-Metallic Conduit	9.87	2.07
		For Work In Restricted Working Space, Add	*1.55*	
26 05 33 13-2508	LF	1-1/2" Flexible Liquid Tight Non-Metallic Conduit	12.76	2.48
		For Work In Restricted Working Space, Add	*1.86*	
26 05 33 13-2509	LF	2" Flexible Liquid Tight Non-Metallic Conduit	16.24	3.30
		For Work In Restricted Working Space, Add	*2.47*	

26 05 33 13-2510 Liquid Tight Non-Metallic Straight Connector *(26 05 33 13-2501)*

26 05 33 13-2511	EA	3/8" Liquid Tight Non-Metallic Straight Connector	12.65	3.30
		For Work In Restricted Working Space, Add	*2.47*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.47*	
26 05 33 13-2512	EA	1/2" Liquid Tight Non-Metallic Straight Connector	12.65	3.30
		For Work In Restricted Working Space, Add	*2.47*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.47*	
26 05 33 13-2513	EA	3/4" Liquid Tight Non-Metallic Straight Connector	15.81	3.71
		For Work In Restricted Working Space, Add	*2.78*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.78*	
26 05 33 13-2514	EA	1" Liquid Tight Non-Metallic Straight Connector	20.13	4.12
		For Work In Restricted Working Space, Add	*3.09*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.09*	
26 05 33 13-2515	EA	1-1/4" Liquid Tight Non-Metallic Straight Connector	28.95	4.53
		For Work In Restricted Working Space, Add	*3.40*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.40*	
26 05 33 13-2516	EA	1-1/2" Liquid Tight Non-Metallic Straight Connector	36.89	4.94
		For Work In Restricted Working Space, Add	*3.71*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.71*	
26 05 33 13-2517	EA	2" Liquid Tight Non-Metallic Straight Connector	59.41	5.78
		For Work In Restricted Working Space, Add	*4.33*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.33*	

26 05 33 13-2518 Liquid Tight Non-Metallic 90 Degree Angle Connector *(26 05 33 13-2501)*

26 05 33 13-2519	EA	3/8" Liquid Tight Non-Metallic 90 Degree Angle Connector	18.51	4.53
		For Work In Restricted Working Space, Add	*3.40*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.40*	
26 05 33 13-2520	EA	1/2" Liquid Tight Non-Metallic 90 Degree Angle Connector	18.51	4.53
		For Work In Restricted Working Space, Add	*3.40*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.40*	
26 05 33 13-2521	EA	3/4" Liquid Tight Non-Metallic 90 Degree Angle Connector	23.41	4.94
		For Work In Restricted Working Space, Add	*3.71*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.71*	
26 05 33 13-2522	EA	1" Liquid Tight Non-Metallic 90 Degree Angle Connector	34.37	5.78
		For Work In Restricted Working Space, Add	*4.33*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.33*	
26 05 33 13-2523	EA	1-1/4" Liquid Tight Non-Metallic 90 Degree Angle Connector	35.30	6.19
		For Work In Restricted Working Space, Add	*4.64*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.64*	
26 05 33 13-2524	EA	1-1/2" Liquid Tight Non-Metallic 90 Degree Angle Connector	59.04	6.60
		For Work In Restricted Working Space, Add	*4.95*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.95*	
26 05 33 13-2525	EA	2" Liquid Tight Non-Metallic 90 Degree Angle Connector	80.81	7.42
		For Work In Restricted Working Space, Add	*5.57*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.57*	

26 05 33 13-2526 Liquid Tight Non-Metallic 45 Degree Angle Connector *(26 05 33 13-2501)*

26 05 33 13-2527	EA	3/8" Liquid Tight Non-Metallic 45 Degree Angle Connector	18.51	4.53
		For Work In Restricted Working Space, Add	*3.40*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.40*	
26 05 33 13-2528	EA	1/2" Liquid Tight Non-Metallic 45 Degree Angle Connector	18.51	4.53
		For Work In Restricted Working Space, Add	*3.40*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.40*	
26 05 33 13-2529	EA	3/4" Liquid Tight Non-Metallic 45 Degree Angle Connector	23.41	4.94
		For Work In Restricted Working Space, Add	*3.71*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.71*	
26 05 33 13-2530	EA	1" Liquid Tight Non-Metallic 45 Degree Angle Connector	34.37	5.78
		For Work In Restricted Working Space, Add	*4.33*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.33*	
26 05 33 13-2531	EA	1-1/4" Liquid Tight Non-Metallic 45 Degree Angle Connector	35.30	6.19
		For Work In Restricted Working Space, Add	*4.64*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.64*	
26 05 33 13-2532	EA	1-1/2" Liquid Tight Non-Metallic 45 Degree Angle Connector	59.04	6.60
		For Work In Restricted Working Space, Add	*4.95*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.95*	
26 05 33 13-2533	EA	2" Liquid Tight Non-Metallic 45 Degree Angle Connector	80.81	7.42
		For Work In Restricted Working Space, Add	*5.57*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.57*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2534		**Blue ENT Electrical Non-Metallic Tubing** *(26 05 33 13-2353)* Note: Carlon - FLEX-PLUS.		
26 05 33 13-2535		**Blue ENT Electrical Non-Metallic Tubing** *(26 05 33 13-2534)*		
26 05 33 13-2536	LF	1/2" Blue ENT Electrical Non-Metallic Tubing	4.95	1.35
		For Work In Restricted Working Space, Add	*1.02*	
26 05 33 13-2537	LF	3/4" Blue ENT Electrical Non-Metallic Tubing	6.69	1.80
		For Work In Restricted Working Space, Add	*1.35*	
26 05 33 13-2538	LF	1" Blue ENT Electrical Non-Metallic Tubing	8.03	1.80
		For Work In Restricted Working Space, Add	*1.35*	
26 05 33 13-2539		**Terminal Adapter** *(26 05 33 13-2534)*		
26 05 33 13-2540	EA	1/2" Quick Connect Terminal Adapter For Blue ENT Electrical Non-Metallic Tubing	11.59	3.61
		For Work In Restricted Working Space, Add	*2.71*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2.71*	
26 05 33 13-2541	EA	3/4" Quick Connect Terminal Adapter For Blue ENT Electrical Non-Metallic Tubing	14.84	4.06
		For Work In Restricted Working Space, Add	*3.05*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.05*	
26 05 33 13-2542	EA	1" Quick Connect Terminal Adapter For Blue ENT Electrical Non-Metallic Tubing	17.31	4.51
		For Work In Restricted Working Space, Add	*3.38*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.38*	
26 05 33 13-2543		**Coupling** *(26 05 33 13-2534)*		
26 05 33 13-2544	EA	1/2" Quick Connect Coupling For Blue ENT Electrical Non-Metallic Tubing	11.25	3.61
		For Work In Restricted Working Space, Add	*2.71*	
26 05 33 13-2545	EA	3/4" Quick Connect Coupling For Blue ENT Electrical Non-Metallic Tubing	13.05	4.06
		For Work In Restricted Working Space, Add	*3.05*	
26 05 33 13-2546	EA	1" Quick Connect Coupling For Blue ENT Electrical Non-Metallic Tubing	15.63	4.51
		For Work In Restricted Working Space, Add	*3.38*	
26 05 33 13-2547		**Metallic Conduit Bodies** *(26 05 33 13-0058)*		
26 05 33 13-2548		**Threaded, Cast Aluminum Conduit Body** *(26 05 33 13-2547)* Note: For use with Rigid Galvanized Steel (RGS), Galvanized Rigid Steel Conduit (GRC), Intermediate Metal Conduit (IMC), or Aluminum Rigid Conduit (ARC)		
26 05 33 13-2549		**Type LB, Threaded, Two Hub Cast Aluminum Conduit Body With Cover** *(26 05 33 13-2548)*		
26 05 33 13-2550	EA	1/2" Type LB, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	61.24	19.78
		For Mogul LB, Add	*6.35*	
		For Work In Restricted Working Space, Add	*14.84*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.95*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.89*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.31*	
		For Elevated Installation >30' To 35' Above Floor, Add	*19.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*24.74*	
		For Elevated Installation >40' Above Floor, Add	*27.21*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.84*	
26 05 33 13-2551	EA	3/4" Type LB, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	72.65	22.67
		For Mogul LB, Add	*9.15*	
		For Work In Restricted Working Space, Add	*17.00*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.67*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.33*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.17*	
		For Elevated Installation >25' To 30' Above Floor, Add	*19.83*	
		For Elevated Installation >30' To 35' Above Floor, Add	*22.67*	
		For Elevated Installation >35' To 40' Above Floor, Add	*28.34*	
		For Elevated Installation >40' Above Floor, Add	*31.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*17.00*	
26 05 33 13-2552	EA	1" Type LB, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	88.70	26.38
		For Mogul LB, Add	*13.77*	
		For Work In Restricted Working Space, Add	*19.79*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.60*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.49*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.08*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.38*	
		For Elevated Installation >35' To 40' Above Floor, Add	*32.98*	
		For Elevated Installation >40' Above Floor, Add	*36.27*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*19.79*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2553	EA	1-1/4" Type LB, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	109.20	30.09
		For Mogul LB, Add	*21.72*	
		For Work In Restricted Working Space, Add	*22.57*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.52*	
		For Elevated Installation >15' To 20' Above Floor, Add	*15.05*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.81*	
		For Elevated Installation >25' To 30' Above Floor, Add	*26.33*	
		For Elevated Installation >30' To 35' Above Floor, Add	*30.09*	
		For Elevated Installation >35' To 40' Above Floor, Add	*37.62*	
		For Elevated Installation >40' Above Floor, Add	*41.38*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*22.57*	
26 05 33 13-2554	EA	1-1/2" Type LB, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	126.27	32.98
		For Mogul LB, Add	*28.74*	
		For Work In Restricted Working Space, Add	*24.74*	
		For Elevated Installation >10' To 15' Above Floor, Add	*8.25*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*20.61*	
		For Elevated Installation >25' To 30' Above Floor, Add	*28.86*	
		For Elevated Installation >30' To 35' Above Floor, Add	*32.98*	
		For Elevated Installation >35' To 40' Above Floor, Add	*41.23*	
		For Elevated Installation >40' Above Floor, Add	*45.35*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*24.74*	
26 05 33 13-2555	EA	2" Type LB, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	169.71	39.57
		For Mogul LB, Add	*48.14*	
		For Work In Restricted Working Space, Add	*29.68*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*34.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*39.57*	
		For Elevated Installation >35' To 40' Above Floor, Add	*49.47*	
		For Elevated Installation >40' Above Floor, Add	*54.41*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*29.68*	
26 05 33 13-2556	EA	2-1/2" Type LB, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	295.78	55.65
		For Mogul LB, Add	*110.54*	
		For Work In Restricted Working Space, Add	*41.74*	
		For Elevated Installation >10' To 15' Above Floor, Add	*13.91*	
		For Elevated Installation >15' To 20' Above Floor, Add	*27.82*	
		For Elevated Installation >20' To 25' Above Floor, Add	*34.78*	
		For Elevated Installation >25' To 30' Above Floor, Add	*48.69*	
		For Elevated Installation >30' To 35' Above Floor, Add	*55.65*	
		For Elevated Installation >35' To 40' Above Floor, Add	*69.56*	
		For Elevated Installation >40' Above Floor, Add	*76.52*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*41.74*	
26 05 33 13-2557	EA	3" Type LB, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	387.77	74.19
		For Mogul LB, Add	*142.43*	
		For Work In Restricted Working Space, Add	*55.65*	
		For Elevated Installation >10' To 15' Above Floor, Add	*18.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*37.10*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.93*	
		For Elevated Installation >30' To 35' Above Floor, Add	*74.20*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.75*	
		For Elevated Installation >40' Above Floor, Add	*102.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*55.65*	
26 05 33 13-2558	EA	3-1/2" Type LB, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	521.15	92.74
		For Mogul LB, Add	*205.37*	
		For Work In Restricted Working Space, Add	*69.56*	
		For Elevated Installation >10' To 15' Above Floor, Add	*23.19*	
		For Elevated Installation >15' To 20' Above Floor, Add	*46.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*57.97*	
		For Elevated Installation >25' To 30' Above Floor, Add	*81.15*	
		For Elevated Installation >30' To 35' Above Floor, Add	*92.74*	
		For Elevated Installation >35' To 40' Above Floor, Add	*115.93*	
		For Elevated Installation >40' Above Floor, Add	*127.52*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*69.56*	
26 05 33 13-2559	EA	4" Type LB, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	684.34	112.95
		For Mogul LB, Add	*287.37*	
		For Work In Restricted Working Space, Add	*84.71*	
		For Elevated Installation >10' To 15' Above Floor, Add	*28.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*56.47*	
		For Elevated Installation >20' To 25' Above Floor, Add	*70.59*	
		For Elevated Installation >25' To 30' Above Floor, Add	*98.83*	
		For Elevated Installation >30' To 35' Above Floor, Add	*112.94*	
		For Elevated Installation >35' To 40' Above Floor, Add	*141.18*	
		For Elevated Installation >40' Above Floor, Add	*155.30*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*84.71*	

26 05 33 13-2560 Type LL Or LR, Threaded, Two Hub Cast Aluminum Conduit Body With Cover *(26 05 33 13-2548)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2561	EA	1/2" Type LL Or LR, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	62.67	19.78
		For Mogul LB, Add	*7.43*	
		For Work In Restricted Working Space, Add	*14.84*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.95*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.89*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.31*	
		For Elevated Installation >30' To 35' Above Floor, Add	*19.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*24.74*	
		For Elevated Installation >40' Above Floor, Add	*27.21*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.84*	
26 05 33 13-2562	EA	3/4" Type LL Or LR, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	74.05	22.67
		For Mogul LB, Add	*10.20*	
		For Work In Restricted Working Space, Add	*17.00*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.67*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.33*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.17*	
		For Elevated Installation >25' To 30' Above Floor, Add	*19.83*	
		For Elevated Installation >30' To 35' Above Floor, Add	*22.67*	
		For Elevated Installation >35' To 40' Above Floor, Add	*28.34*	
		For Elevated Installation >40' Above Floor, Add	*31.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*17.00*	
26 05 33 13-2563	EA	1" Type LL Or LR, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	91.51	26.38
		For Mogul LB, Add	*15.87*	
		For Work In Restricted Working Space, Add	*19.79*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.60*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.49*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.08*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.38*	
		For Elevated Installation >35' To 40' Above Floor, Add	*32.98*	
		For Elevated Installation >40' Above Floor, Add	*36.27*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*19.79*	
26 05 33 13-2564	EA	1-1/4" Type LL Or LR, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	112.63	30.09
		For Mogul LB, Add	*24.29*	
		For Work In Restricted Working Space, Add	*22.57*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.52*	
		For Elevated Installation >15' To 20' Above Floor, Add	*15.05*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.81*	
		For Elevated Installation >25' To 30' Above Floor, Add	*26.33*	
		For Elevated Installation >30' To 35' Above Floor, Add	*30.09*	
		For Elevated Installation >35' To 40' Above Floor, Add	*37.62*	
		For Elevated Installation >40' Above Floor, Add	*41.38*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*22.57*	
26 05 33 13-2565	EA	1-1/2" Type LL Or LR, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	132.11	32.98
		For Mogul LB, Add	*33.12*	
		For Work In Restricted Working Space, Add	*24.74*	
		For Elevated Installation >10' To 15' Above Floor, Add	*8.25*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*20.61*	
		For Elevated Installation >25' To 30' Above Floor, Add	*28.86*	
		For Elevated Installation >30' To 35' Above Floor, Add	*32.98*	
		For Elevated Installation >35' To 40' Above Floor, Add	*41.23*	
		For Elevated Installation >40' Above Floor, Add	*45.35*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*24.74*	
26 05 33 13-2566	EA	2" Type LL Or LR, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	182.23	39.57
		For Mogul LB, Add	*57.53*	
		For Work In Restricted Working Space, Add	*29.68*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*34.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*39.57*	
		For Elevated Installation >35' To 40' Above Floor, Add	*49.47*	
		For Elevated Installation >40' Above Floor, Add	*54.41*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*29.68*	
26 05 33 13-2567	EA	2-1/2" Type LL Or LR, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	289.47	55.65
		For Mogul LB, Add	*105.81*	
		For Work In Restricted Working Space, Add	*41.74*	
		For Elevated Installation >10' To 15' Above Floor, Add	*13.91*	
		For Elevated Installation >15' To 20' Above Floor, Add	*27.82*	
		For Elevated Installation >20' To 25' Above Floor, Add	*34.78*	
		For Elevated Installation >25' To 30' Above Floor, Add	*48.69*	
		For Elevated Installation >30' To 35' Above Floor, Add	*55.65*	
		For Elevated Installation >35' To 40' Above Floor, Add	*69.56*	
		For Elevated Installation >40' Above Floor, Add	*76.52*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*41.74*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2568	EA	3" Type LL Or LR, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	366.54	74.19
		For Mogul LB, Add	*126.51*	
		For Work In Restricted Working Space, Add	*55.65*	
		For Elevated Installation >10' To 15' Above Floor, Add	*18.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*37.10*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.93*	
		For Elevated Installation >30' To 35' Above Floor, Add	*74.20*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.75*	
		For Elevated Installation >40' Above Floor, Add	*102.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*55.65*	
26 05 33 13-2569	EA	3-1/2" Type LL Or LR, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	539.24	92.74
		For Mogul LB, Add	*218.94*	
		For Work In Restricted Working Space, Add	*69.56*	
		For Elevated Installation >10' To 15' Above Floor, Add	*23.19*	
		For Elevated Installation >15' To 20' Above Floor, Add	*46.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*57.97*	
		For Elevated Installation >25' To 30' Above Floor, Add	*81.15*	
		For Elevated Installation >30' To 35' Above Floor, Add	*92.74*	
		For Elevated Installation >35' To 40' Above Floor, Add	*115.93*	
		For Elevated Installation >40' Above Floor, Add	*127.52*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*69.56*	
26 05 33 13-2570	EA	4" Type LL Or LR, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	721.33	112.95
		For Mogul LB, Add	*315.11*	
		For Work In Restricted Working Space, Add	*84.71*	
		For Elevated Installation >10' To 15' Above Floor, Add	*28.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*56.47*	
		For Elevated Installation >20' To 25' Above Floor, Add	*70.59*	
		For Elevated Installation >25' To 30' Above Floor, Add	*98.83*	
		For Elevated Installation >30' To 35' Above Floor, Add	*112.94*	
		For Elevated Installation >35' To 40' Above Floor, Add	*141.18*	
		For Elevated Installation >40' Above Floor, Add	*155.30*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*84.71*	
26 05 33 13-2571		Type T, Threaded, Three Hub Cast Aluminum Conduit Body With Cover *(26 05 33 13-2548)*		
26 05 33 13-2572	EA	1/2" Type T, Threaded, Three Hub Cast Aluminum Conduit Body With Cover	72.27	22.67
		For Work In Restricted Working Space, Add	*17.00*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.67*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.33*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.17*	
		For Elevated Installation >25' To 30' Above Floor, Add	*19.83*	
		For Elevated Installation >30' To 35' Above Floor, Add	*22.67*	
		For Elevated Installation >35' To 40' Above Floor, Add	*28.34*	
		For Elevated Installation >40' Above Floor, Add	*31.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*17.00*	
26 05 33 13-2573	EA	3/4" Type T, Threaded, Three Hub Cast Aluminum Conduit Body With Cover	86.04	26.38
		For Work In Restricted Working Space, Add	*19.79*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.60*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.49*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.08*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.38*	
		For Elevated Installation >35' To 40' Above Floor, Add	*32.98*	
		For Elevated Installation >40' Above Floor, Add	*36.27*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*19.79*	
26 05 33 13-2574	EA	1" Type T, Threaded, Three Hub Cast Aluminum Conduit Body With Cover	100.57	28.86
		For Work In Restricted Working Space, Add	*21.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.21*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.43*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.04*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.25*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.86*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.07*	
		For Elevated Installation >40' Above Floor, Add	*39.68*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.64*	
26 05 33 13-2575	EA	1-1/4" Type T, Threaded, Three Hub Cast Aluminum Conduit Body With Cover	125.54	32.98
		For Work In Restricted Working Space, Add	*24.74*	
		For Elevated Installation >10' To 15' Above Floor, Add	*8.25*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*20.61*	
		For Elevated Installation >25' To 30' Above Floor, Add	*28.86*	
		For Elevated Installation >30' To 35' Above Floor, Add	*32.98*	
		For Elevated Installation >35' To 40' Above Floor, Add	*41.23*	
		For Elevated Installation >40' Above Floor, Add	*45.35*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*24.74*	
26 05 33 13-2576	EA	1-1/2" Type T, Threaded, Three Hub Cast Aluminum Conduit Body With Cover	146.69	36.28
		For Work In Restricted Working Space, Add	*27.21*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.07*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.14*	
		For Elevated Installation >20' To 25' Above Floor, Add	*22.67*	
		For Elevated Installation >25' To 30' Above Floor, Add	*31.74*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.28*	
		For Elevated Installation >35' To 40' Above Floor, Add	*45.35*	
		For Elevated Installation >40' Above Floor, Add	*49.88*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.21*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2577	EA	2" Type T, Threaded, Three Hub Cast Aluminum Conduit Body With Cover	201.92	42.46
		For Work In Restricted Working Space, Add	*31.84*	
		For Elevated Installation >10' To 15' Above Floor, Add	*10.61*	
		For Elevated Installation >15' To 20' Above Floor, Add	*21.23*	
		For Elevated Installation >20' To 25' Above Floor, Add	*26.54*	
		For Elevated Installation >25' To 30' Above Floor, Add	*37.15*	
		For Elevated Installation >30' To 35' Above Floor, Add	*42.46*	
		For Elevated Installation >35' To 40' Above Floor, Add	*53.07*	
		For Elevated Installation >40' Above Floor, Add	*58.38*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*31.84*	
26 05 33 13-2578	EA	2-1/2" Type T, Threaded, Three Hub Cast Aluminum Conduit Body With Cover	323.81	61.83
		For Work In Restricted Working Space, Add	*46.37*	
		For Elevated Installation >10' To 15' Above Floor, Add	*15.46*	
		For Elevated Installation >15' To 20' Above Floor, Add	*30.91*	
		For Elevated Installation >20' To 25' Above Floor, Add	*38.64*	
		For Elevated Installation >25' To 30' Above Floor, Add	*54.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*61.83*	
		For Elevated Installation >35' To 40' Above Floor, Add	*77.29*	
		For Elevated Installation >40' Above Floor, Add	*85.01*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*46.37*	
26 05 33 13-2579	EA	3" Type T, Threaded, Three Hub Cast Aluminum Conduit Body With Cover	417.90	80.38
		For Work In Restricted Working Space, Add	*60.29*	
		For Elevated Installation >10' To 15' Above Floor, Add	*20.10*	
		For Elevated Installation >15' To 20' Above Floor, Add	*40.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*50.24*	
		For Elevated Installation >25' To 30' Above Floor, Add	*70.33*	
		For Elevated Installation >30' To 35' Above Floor, Add	*80.38*	
		For Elevated Installation >35' To 40' Above Floor, Add	*100.48*	
		For Elevated Installation >40' Above Floor, Add	*110.52*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*60.29*	
26 05 33 13-2580	EA	3-1/2" Type T, Threaded, Three Hub Cast Aluminum Conduit Body With Cover	697.93	98.93
		For Work In Restricted Working Space, Add	*74.20*	
		For Elevated Installation >10' To 15' Above Floor, Add	*24.73*	
		For Elevated Installation >15' To 20' Above Floor, Add	*49.47*	
		For Elevated Installation >20' To 25' Above Floor, Add	*61.83*	
		For Elevated Installation >25' To 30' Above Floor, Add	*86.57*	
		For Elevated Installation >30' To 35' Above Floor, Add	*98.93*	
		For Elevated Installation >35' To 40' Above Floor, Add	*123.67*	
		For Elevated Installation >40' Above Floor, Add	*136.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*74.20*	
26 05 33 13-2581	EA	4" Type T, Threaded, Three Hub Cast Aluminum Conduit Body With Cover	793.94	119.13
		For Work In Restricted Working Space, Add	*89.34*	
		For Elevated Installation >10' To 15' Above Floor, Add	*29.78*	
		For Elevated Installation >15' To 20' Above Floor, Add	*59.56*	
		For Elevated Installation >20' To 25' Above Floor, Add	*74.45*	
		For Elevated Installation >25' To 30' Above Floor, Add	*104.23*	
		For Elevated Installation >30' To 35' Above Floor, Add	*119.12*	
		For Elevated Installation >35' To 40' Above Floor, Add	*148.91*	
		For Elevated Installation >40' Above Floor, Add	*163.80*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*89.34*	
26 05 33 13-2582		Type C, Threaded, Two Hub Cast Aluminum Conduit Body With Cover *(26 05 33 13-2548)*		
26 05 33 13-2583	EA	1/2" Type C, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	62.96	19.78
		For Work In Restricted Working Space, Add	*14.84*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.95*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.89*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.31*	
		For Elevated Installation >30' To 35' Above Floor, Add	*19.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*24.74*	
		For Elevated Installation >40' Above Floor, Add	*27.21*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.84*	
26 05 33 13-2584	EA	3/4" Type C, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	73.06	22.67
		For Work In Restricted Working Space, Add	*17.00*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.67*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.33*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.17*	
		For Elevated Installation >25' To 30' Above Floor, Add	*19.83*	
		For Elevated Installation >30' To 35' Above Floor, Add	*22.67*	
		For Elevated Installation >35' To 40' Above Floor, Add	*28.34*	
		For Elevated Installation >40' Above Floor, Add	*31.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*17.00*	
26 05 33 13-2585	EA	1" Type C, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	89.34	25.97
		For Work In Restricted Working Space, Add	*19.48*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.23*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*32.46*	
		For Elevated Installation >40' Above Floor, Add	*35.71*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*19.48*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2586	EA	1-1/4" Type C, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	111.26	30.09
		For Work In Restricted Working Space, Add	*22.57*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.52*	
		For Elevated Installation >15' To 20' Above Floor, Add	*15.05*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.81*	
		For Elevated Installation >25' To 30' Above Floor, Add	*26.33*	
		For Elevated Installation >30' To 35' Above Floor, Add	*30.09*	
		For Elevated Installation >35' To 40' Above Floor, Add	*37.62*	
		For Elevated Installation >40' Above Floor, Add	*41.38*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*22.57*	
26 05 33 13-2587	EA	1-1/2" Type C, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	125.32	32.98
		For Work In Restricted Working Space, Add	*24.74*	
		For Elevated Installation >10' To 15' Above Floor, Add	*8.25*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*20.61*	
		For Elevated Installation >25' To 30' Above Floor, Add	*28.86*	
		For Elevated Installation >30' To 35' Above Floor, Add	*32.98*	
		For Elevated Installation >35' To 40' Above Floor, Add	*41.23*	
		For Elevated Installation >40' Above Floor, Add	*45.35*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*24.74*	
26 05 33 13-2588	EA	2" Type C, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	169.82	39.57
		For Work In Restricted Working Space, Add	*29.68*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*34.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*39.57*	
		For Elevated Installation >35' To 40' Above Floor, Add	*49.47*	
		For Elevated Installation >40' Above Floor, Add	*54.41*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*29.68*	
26 05 33 13-2589	EA	2-1/2" Type C, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	284.15	55.65
		For Work In Restricted Working Space, Add	*41.74*	
		For Elevated Installation >10' To 15' Above Floor, Add	*13.91*	
		For Elevated Installation >15' To 20' Above Floor, Add	*27.82*	
		For Elevated Installation >20' To 25' Above Floor, Add	*34.78*	
		For Elevated Installation >25' To 30' Above Floor, Add	*48.69*	
		For Elevated Installation >30' To 35' Above Floor, Add	*55.65*	
		For Elevated Installation >35' To 40' Above Floor, Add	*69.56*	
		For Elevated Installation >40' Above Floor, Add	*76.52*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*41.74*	
26 05 33 13-2590	EA	3" Type C, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	363.15	74.19
		For Work In Restricted Working Space, Add	*55.65*	
		For Elevated Installation >10' To 15' Above Floor, Add	*18.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*37.10*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.93*	
		For Elevated Installation >30' To 35' Above Floor, Add	*74.20*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.75*	
		For Elevated Installation >40' Above Floor, Add	*102.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*55.65*	
26 05 33 13-2591	EA	3-1/2" Type C, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	528.36	92.74
		For Work In Restricted Working Space, Add	*69.56*	
		For Elevated Installation >10' To 15' Above Floor, Add	*23.19*	
		For Elevated Installation >15' To 20' Above Floor, Add	*46.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*57.97*	
		For Elevated Installation >25' To 30' Above Floor, Add	*81.15*	
		For Elevated Installation >30' To 35' Above Floor, Add	*92.74*	
		For Elevated Installation >35' To 40' Above Floor, Add	*115.93*	
		For Elevated Installation >40' Above Floor, Add	*127.52*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*69.56*	
26 05 33 13-2592	EA	4" Type C, Threaded, Two Hub Cast Aluminum Conduit Body With Cover	687.74	112.95
		For Work In Restricted Working Space, Add	*84.71*	
		For Elevated Installation >10' To 15' Above Floor, Add	*28.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*56.47*	
		For Elevated Installation >20' To 25' Above Floor, Add	*70.59*	
		For Elevated Installation >25' To 30' Above Floor, Add	*98.83*	
		For Elevated Installation >30' To 35' Above Floor, Add	*112.94*	
		For Elevated Installation >35' To 40' Above Floor, Add	*141.18*	
		For Elevated Installation >40' Above Floor, Add	*155.30*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*84.71*	
26 05 33 13-2593		Type X, Threaded, Four Hub Cast Aluminum Conduit Body With Cover *(26 05 33 13-2548)*		
26 05 33 13-2594	EA	1/2"Type X, Threaded, Four Hub Cast Aluminum Conduit Body With Cover	84.07	25.97
		For Work In Restricted Working Space, Add	*19.48*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.23*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*32.46*	
		For Elevated Installation >40' Above Floor, Add	*35.71*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*19.48*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2595	EA	3/4" Type X, Threaded, Four Hub Cast Aluminum Conduit Body With Cover	98.04	28.86
		For Work In Restricted Working Space, Add	*21.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.21*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.43*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.04*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.25*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.86*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.07*	
		For Elevated Installation >40' Above Floor, Add	*39.68*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.64*	
26 05 33 13-2596	EA	1" Type X, Threaded, Four Hub Cast Aluminum Conduit Body With Cover	123.17	31.74
		For Work In Restricted Working Space, Add	*23.81*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.94*	
		For Elevated Installation >15' To 20' Above Floor, Add	*15.87*	
		For Elevated Installation >20' To 25' Above Floor, Add	*19.84*	
		For Elevated Installation >25' To 30' Above Floor, Add	*27.77*	
		For Elevated Installation >30' To 35' Above Floor, Add	*31.74*	
		For Elevated Installation >35' To 40' Above Floor, Add	*39.68*	
		For Elevated Installation >40' Above Floor, Add	*43.64*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*23.81*	
26 05 33 13-2597	EA	1-1/4" Type X, Threaded, Four Hub Cast Aluminum Conduit Body With Cover	142.29	36.28
		For Work In Restricted Working Space, Add	*27.21*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.07*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.14*	
		For Elevated Installation >20' To 25' Above Floor, Add	*22.67*	
		For Elevated Installation >25' To 30' Above Floor, Add	*31.74*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.28*	
		For Elevated Installation >35' To 40' Above Floor, Add	*45.35*	
		For Elevated Installation >40' Above Floor, Add	*49.88*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.21*	
26 05 33 13-2598	EA	1-1/2" Type X, Threaded, Four Hub Cast Aluminum Conduit Body With Cover	189.31	39.57
		For Work In Restricted Working Space, Add	*29.68*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*34.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*39.57*	
		For Elevated Installation >35' To 40' Above Floor, Add	*49.47*	
		For Elevated Installation >40' Above Floor, Add	*54.41*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*29.68*	
26 05 33 13-2599	EA	2" Type X, Threaded, Four Hub Cast Aluminum Conduit Body With Cover	228.18	48.64
		For Work In Restricted Working Space, Add	*36.48*	
		For Elevated Installation >10' To 15' Above Floor, Add	*12.16*	
		For Elevated Installation >15' To 20' Above Floor, Add	*24.32*	
		For Elevated Installation >20' To 25' Above Floor, Add	*30.40*	
		For Elevated Installation >25' To 30' Above Floor, Add	*42.56*	
		For Elevated Installation >30' To 35' Above Floor, Add	*48.64*	
		For Elevated Installation >35' To 40' Above Floor, Add	*60.80*	
		For Elevated Installation >40' Above Floor, Add	*66.88*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*36.48*	
26 05 33 13-2600	EA	2-1/2" Type X, Threaded, Four Hub Cast Aluminum Conduit Body With Cover	442.71	71.31
		For Work In Restricted Working Space, Add	*53.48*	
		For Elevated Installation >10' To 15' Above Floor, Add	*17.83*	
		For Elevated Installation >15' To 20' Above Floor, Add	*35.66*	
		For Elevated Installation >20' To 25' Above Floor, Add	*44.57*	
		For Elevated Installation >25' To 30' Above Floor, Add	*62.40*	
		For Elevated Installation >30' To 35' Above Floor, Add	*71.31*	
		For Elevated Installation >35' To 40' Above Floor, Add	*89.14*	
		For Elevated Installation >40' Above Floor, Add	*98.05*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*53.48*	
26 05 33 13-2601	EA	3" Type X, Threaded, Four Hub Cast Aluminum Conduit Body With Cover	541.63	92.74
		For Work In Restricted Working Space, Add	*69.56*	
		For Elevated Installation >10' To 15' Above Floor, Add	*23.19*	
		For Elevated Installation >15' To 20' Above Floor, Add	*46.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*57.97*	
		For Elevated Installation >25' To 30' Above Floor, Add	*81.15*	
		For Elevated Installation >30' To 35' Above Floor, Add	*92.74*	
		For Elevated Installation >35' To 40' Above Floor, Add	*115.93*	
		For Elevated Installation >40' Above Floor, Add	*127.52*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*69.56*	
26 05 33 13-2602	EA	3-1/2" Type X, Threaded, Four Hub Cast Aluminum Conduit Body With Cover	788.14	114.59
		For Work In Restricted Working Space, Add	*86.57*	
		For Elevated Installation >10' To 15' Above Floor, Add	*28.86*	
		For Elevated Installation >15' To 20' Above Floor, Add	*57.71*	
		For Elevated Installation >20' To 25' Above Floor, Add	*72.14*	
		For Elevated Installation >25' To 30' Above Floor, Add	*100.99*	
		For Elevated Installation >30' To 35' Above Floor, Add	*115.42*	
		For Elevated Installation >35' To 40' Above Floor, Add	*144.28*	
		For Elevated Installation >40' Above Floor, Add	*158.70*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*86.57*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2603	EA	4" Type X, Threaded, Four Hub Cast Aluminum Conduit Body With Cover	953.66	137.68
		For Work In Restricted Working Space, Add	*103.26*	
		For Elevated Installation >10' To 15' Above Floor, Add	*34.42*	
		For Elevated Installation >15' To 20' Above Floor, Add	*68.84*	
		For Elevated Installation >20' To 25' Above Floor, Add	*86.05*	
		For Elevated Installation >25' To 30' Above Floor, Add	*120.47*	
		For Elevated Installation >30' To 35' Above Floor, Add	*137.68*	
		For Elevated Installation >35' To 40' Above Floor, Add	*172.10*	
		For Elevated Installation >40' Above Floor, Add	*189.30*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*103.26*	
26 05 33 13-2604		Threaded, Malleable Iron Conduit Body *(26 05 33 13-2547)*		
		Note: For use with Rigid Galvanized Steel (RGS), Galvanized Rigid Steel Conduit (GRC), or Intermediate Metal Conduit (IMC)		
26 05 33 13-2605		Type LB, Threaded, Two Hub Malleable Iron Conduit Body With Cover *(26 05 33 13-2604)*		
26 05 33 13-2606	EA	1/2" Type LB, Threaded, Two Hub Malleable Iron Conduit Body With Cover	65.24	19.78
		For Work In Restricted Working Space, Add	*14.84*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.95*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.89*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.31*	
		For Elevated Installation >30' To 35' Above Floor, Add	*19.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*24.74*	
		For Elevated Installation >40' Above Floor, Add	*27.21*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.84*	
26 05 33 13-2607	EA	3/4" Type LB, Threaded, Two Hub Malleable Iron Conduit Body With Cover	76.01	22.67
		For Work In Restricted Working Space, Add	*17.00*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.67*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.33*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.17*	
		For Elevated Installation >25' To 30' Above Floor, Add	*19.83*	
		For Elevated Installation >30' To 35' Above Floor, Add	*22.67*	
		For Elevated Installation >35' To 40' Above Floor, Add	*28.34*	
		For Elevated Installation >40' Above Floor, Add	*31.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*17.00*	
26 05 33 13-2608	EA	1" Type LB, Threaded, Two Hub Malleable Iron Conduit Body With Cover	94.77	26.38
		For Work In Restricted Working Space, Add	*19.79*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.60*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.49*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.08*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.38*	
		For Elevated Installation >35' To 40' Above Floor, Add	*32.98*	
		For Elevated Installation >40' Above Floor, Add	*36.27*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*19.79*	
26 05 33 13-2609	EA	1-1/4" Type LB, Threaded, Two Hub Malleable Iron Conduit Body With Cover	126.93	30.09
		For Work In Restricted Working Space, Add	*22.57*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.52*	
		For Elevated Installation >15' To 20' Above Floor, Add	*15.05*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.81*	
		For Elevated Installation >25' To 30' Above Floor, Add	*26.33*	
		For Elevated Installation >30' To 35' Above Floor, Add	*30.09*	
		For Elevated Installation >35' To 40' Above Floor, Add	*37.62*	
		For Elevated Installation >40' Above Floor, Add	*41.38*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*22.57*	
26 05 33 13-2610	EA	1-1/2" Type LB, Threaded, Two Hub Malleable Iron Conduit Body With Cover	145.87	32.98
		For Work In Restricted Working Space, Add	*24.74*	
		For Elevated Installation >10' To 15' Above Floor, Add	*8.25*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*20.61*	
		For Elevated Installation >25' To 30' Above Floor, Add	*28.86*	
		For Elevated Installation >30' To 35' Above Floor, Add	*32.98*	
		For Elevated Installation >35' To 40' Above Floor, Add	*41.23*	
		For Elevated Installation >40' Above Floor, Add	*45.35*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*24.74*	
26 05 33 13-2611	EA	2" Type LB, Threaded, Two Hub Malleable Iron Conduit Body With Cover	205.06	39.57
		For Work In Restricted Working Space, Add	*29.68*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*34.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*39.57*	
		For Elevated Installation >35' To 40' Above Floor, Add	*49.47*	
		For Elevated Installation >40' Above Floor, Add	*54.41*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*29.68*	
26 05 33 13-2612	EA	2-1/2" Type LB, Threaded, Two Hub Malleable Iron Conduit Body With Cover	356.37	55.65
		For Work In Restricted Working Space, Add	*41.74*	
		For Elevated Installation >10' To 15' Above Floor, Add	*13.91*	
		For Elevated Installation >15' To 20' Above Floor, Add	*27.83*	
		For Elevated Installation >20' To 25' Above Floor, Add	*34.78*	
		For Elevated Installation >25' To 30' Above Floor, Add	*48.70*	
		For Elevated Installation >30' To 35' Above Floor, Add	*55.65*	
		For Elevated Installation >35' To 40' Above Floor, Add	*69.57*	
		For Elevated Installation >40' Above Floor, Add	*76.52*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*41.74*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2613	EA	3" Type LB, Threaded, Two Hub Malleable Iron Conduit Body With Cover	509.57	74.19
		For Work In Restricted Working Space, Add	*55.65*	
		For Elevated Installation >10' To 15' Above Floor, Add	*18.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*37.10*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.93*	
		For Elevated Installation >30' To 35' Above Floor, Add	*74.20*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.75*	
		For Elevated Installation >40' Above Floor, Add	*102.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*55.65*	
26 05 33 13-2614	EA	3-1/2" Type LB, Threaded, Two Hub Malleable Iron Conduit Body With Cover	711.64	92.74
		For Work In Restricted Working Space, Add	*69.56*	
		For Elevated Installation >10' To 15' Above Floor, Add	*23.19*	
		For Elevated Installation >15' To 20' Above Floor, Add	*46.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*57.97*	
		For Elevated Installation >25' To 30' Above Floor, Add	*81.15*	
		For Elevated Installation >30' To 35' Above Floor, Add	*92.74*	
		For Elevated Installation >35' To 40' Above Floor, Add	*115.93*	
		For Elevated Installation >40' Above Floor, Add	*127.52*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*69.56*	
26 05 33 13-2615	EA	4" Type LB, Threaded, Two Hub Malleable Iron Conduit Body With Cover	849.70	112.95
		For Work In Restricted Working Space, Add	*84.71*	
		For Elevated Installation >10' To 15' Above Floor, Add	*28.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*56.47*	
		For Elevated Installation >20' To 25' Above Floor, Add	*70.59*	
		For Elevated Installation >25' To 30' Above Floor, Add	*98.83*	
		For Elevated Installation >30' To 35' Above Floor, Add	*112.94*	
		For Elevated Installation >35' To 40' Above Floor, Add	*141.18*	
		For Elevated Installation >40' Above Floor, Add	*155.30*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*84.71*	

26 05 33 13-2616 Type LL Or LR, Threaded, Two Hub Malleable Iron Conduit Body With Cover *(26 05 33 13-2604)*

26 05 33 13-2617	EA	1/2" Type LL Or LR, Threaded, Two Hub Malleable Iron Conduit Body With Cover	68.89	19.78
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.84*	
26 05 33 13-2618	EA	3/4" Type LL Or LR, Threaded, Two Hub Malleable Iron Conduit Body With Cover	77.08	22.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*17.00*	
26 05 33 13-2619	EA	1" Type LL Or LR, Threaded, Two Hub Malleable Iron Conduit Body With Cover	100.34	26.38
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*19.79*	
26 05 33 13-2620	EA	1-1/4" Type LL Or LR, Threaded, Two Hub Malleable Iron Conduit Body With Cover	130.67	30.09
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*22.57*	
26 05 33 13-2621	EA	1-1/2" Type LL Or LR, Threaded, Two Hub Malleable Iron Conduit Body With Cover	150.44	32.98
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*24.74*	
26 05 33 13-2622	EA	2" Type LL Or LR, Threaded, Two Hub Malleable Iron Conduit Body With Cover	195.68	39.57
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*29.68*	
26 05 33 13-2623	EA	2-1/2" Type LL Or LR, Threaded, Two Hub Malleable Iron Conduit Body With Cover	304.28	55.65
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*41.74*	
26 05 33 13-2624	EA	3" Type LL Or LR, Threaded, Two Hub Malleable Iron Conduit Body With Cover	415.91	74.19
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*55.65*	
26 05 33 13-2625	EA	3-1/2" Type LL Or LR, Threaded, Two Hub Malleable Iron Conduit Body With Cover	766.80	92.74
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*69.56*	
26 05 33 13-2626	EA	4" Type LL Or LR, Threaded, Two Hub Malleable Iron Conduit Body With Cover	890.38	112.95
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*84.71*	

26 05 33 13-2627 Type T, Threaded, Three Hub Malleable Iron Conduit Body With Cover *(26 05 33 13-2604)*

26 05 33 13-2628	EA	1/2" Type T, Threaded, Three Hub Malleable Iron Conduit Body With Cover	82.71	22.67
		For Work In Restricted Working Space, Add	*17.00*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.67*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.33*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.17*	
		For Elevated Installation >25' To 30' Above Floor, Add	*19.83*	
		For Elevated Installation >30' To 35' Above Floor, Add	*22.67*	
		For Elevated Installation >35' To 40' Above Floor, Add	*28.34*	
		For Elevated Installation >40' Above Floor, Add	*31.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*17.00*	
26 05 33 13-2629	EA	3/4" Type T, Threaded, Three Hub Malleable Iron Conduit Body With Cover	97.43	26.38
		For Work In Restricted Working Space, Add	*20.09*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.70*	
		For Elevated Installation >15' To 20' Above Floor, Add	*13.40*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.75*	
		For Elevated Installation >25' To 30' Above Floor, Add	*23.44*	
		For Elevated Installation >30' To 35' Above Floor, Add	*26.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*33.49*	
		For Elevated Installation >40' Above Floor, Add	*36.84*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.09*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2630	EA	1" Type T, Threaded, Three Hub Malleable Iron Conduit Body With Cover	118.20	28.86
		For Work In Restricted Working Space, Add	*21.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.21*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.43*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.04*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.25*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.86*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.07*	
		For Elevated Installation >40' Above Floor, Add	*39.68*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.64*	
26 05 33 13-2631	EA	1-1/4" Type T, Threaded, Three Hub Malleable Iron Conduit Body With Cover	152.77	32.98
		For Work In Restricted Working Space, Add	*24.42*	
		For Elevated Installation >10' To 15' Above Floor, Add	*8.14*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.28*	
		For Elevated Installation >20' To 25' Above Floor, Add	*20.35*	
		For Elevated Installation >25' To 30' Above Floor, Add	*28.49*	
		For Elevated Installation >30' To 35' Above Floor, Add	*32.56*	
		For Elevated Installation >35' To 40' Above Floor, Add	*40.71*	
		For Elevated Installation >40' Above Floor, Add	*44.78*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*24.42*	
26 05 33 13-2632	EA	1-1/2" Type T, Threaded, Three Hub Malleable Iron Conduit Body With Cover	176.44	36.28
		For Work In Restricted Working Space, Add	*27.21*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.07*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.14*	
		For Elevated Installation >20' To 25' Above Floor, Add	*22.67*	
		For Elevated Installation >25' To 30' Above Floor, Add	*31.74*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.28*	
		For Elevated Installation >35' To 40' Above Floor, Add	*45.35*	
		For Elevated Installation >40' Above Floor, Add	*49.88*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.21*	
26 05 33 13-2633	EA	2" Type T, Threaded, Three Hub Malleable Iron Conduit Body With Cover	240.49	42.46
		For Work In Restricted Working Space, Add	*31.84*	
		For Elevated Installation >10' To 15' Above Floor, Add	*10.61*	
		For Elevated Installation >15' To 20' Above Floor, Add	*21.23*	
		For Elevated Installation >20' To 25' Above Floor, Add	*26.54*	
		For Elevated Installation >25' To 30' Above Floor, Add	*37.15*	
		For Elevated Installation >30' To 35' Above Floor, Add	*42.46*	
		For Elevated Installation >35' To 40' Above Floor, Add	*53.07*	
		For Elevated Installation >40' Above Floor, Add	*58.38*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*31.84*	
26 05 33 13-2634	EA	2-1/2" Type T, Threaded, Three Hub Malleable Iron Conduit Body With Cover	295.52	61.83
		For Work In Restricted Working Space, Add	*46.37*	
		For Elevated Installation >10' To 15' Above Floor, Add	*15.46*	
		For Elevated Installation >15' To 20' Above Floor, Add	*30.91*	
		For Elevated Installation >20' To 25' Above Floor, Add	*38.64*	
		For Elevated Installation >25' To 30' Above Floor, Add	*54.10*	
		For Elevated Installation >30' To 35' Above Floor, Add	*61.83*	
		For Elevated Installation >35' To 40' Above Floor, Add	*77.29*	
		For Elevated Installation >40' Above Floor, Add	*85.01*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*46.37*	
26 05 33 13-2635	EA	3" Type T, Threaded, Three Hub Malleable Iron Conduit Body With Cover	435.18	80.38
		For Work In Restricted Working Space, Add	*60.29*	
		For Elevated Installation >10' To 15' Above Floor, Add	*20.10*	
		For Elevated Installation >15' To 20' Above Floor, Add	*40.19*	
		For Elevated Installation >20' To 25' Above Floor, Add	*50.24*	
		For Elevated Installation >25' To 30' Above Floor, Add	*70.33*	
		For Elevated Installation >30' To 35' Above Floor, Add	*80.38*	
		For Elevated Installation >35' To 40' Above Floor, Add	*100.48*	
		For Elevated Installation >40' Above Floor, Add	*110.52*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*60.29*	
26 05 33 13-2636	EA	3-1/2" Type T, Threaded, Three Hub Malleable Iron Conduit Body With Cover	807.74	98.93
		For Work In Restricted Working Space, Add	*74.20*	
		For Elevated Installation >10' To 15' Above Floor, Add	*24.73*	
		For Elevated Installation >15' To 20' Above Floor, Add	*49.47*	
		For Elevated Installation >20' To 25' Above Floor, Add	*61.83*	
		For Elevated Installation >25' To 30' Above Floor, Add	*86.57*	
		For Elevated Installation >30' To 35' Above Floor, Add	*98.93*	
		For Elevated Installation >35' To 40' Above Floor, Add	*123.67*	
		For Elevated Installation >40' Above Floor, Add	*136.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*74.20*	
26 05 33 13-2637	EA	4" Type T, Threaded, Three Hub Malleable Iron Conduit Body With Cover	928.89	119.13
		For Work In Restricted Working Space, Add	*89.66*	
		For Elevated Installation >10' To 15' Above Floor, Add	*29.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*59.77*	
		For Elevated Installation >20' To 25' Above Floor, Add	*74.71*	
		For Elevated Installation >25' To 30' Above Floor, Add	*104.60*	
		For Elevated Installation >30' To 35' Above Floor, Add	*119.54*	
		For Elevated Installation >35' To 40' Above Floor, Add	*149.43*	
		For Elevated Installation >40' Above Floor, Add	*164.37*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*89.66*	

26 05 33 13-2638 Type C, Threaded, Two Hub Malleable Iron Conduit Body With Cover *(26 05 33 13-2604)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2639	EA	1/2" Type C, Threaded, Two Hub Malleable Iron Conduit Body With Cover	65.52	19.78
		For Work In Restricted Working Space, Add	*14.84*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.95*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.89*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.37*	
		For Elevated Installation >25' To 30' Above Floor, Add	*17.31*	
		For Elevated Installation >30' To 35' Above Floor, Add	*19.79*	
		For Elevated Installation >35' To 40' Above Floor, Add	*24.74*	
		For Elevated Installation >40' Above Floor, Add	*27.21*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.84*	
26 05 33 13-2640	EA	3/4" Type C, Threaded, Two Hub Malleable Iron Conduit Body With Cover	80.74	22.67
		For Work In Restricted Working Space, Add	*17.00*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.67*	
		For Elevated Installation >15' To 20' Above Floor, Add	*11.34*	
		For Elevated Installation >20' To 25' Above Floor, Add	*14.17*	
		For Elevated Installation >25' To 30' Above Floor, Add	*19.84*	
		For Elevated Installation >30' To 35' Above Floor, Add	*22.67*	
		For Elevated Installation >35' To 40' Above Floor, Add	*28.34*	
		For Elevated Installation >40' Above Floor, Add	*31.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*17.00*	
26 05 33 13-2641	EA	1" Type C, Threaded, Two Hub Malleable Iron Conduit Body With Cover	95.06	25.97
		For Work In Restricted Working Space, Add	*19.48*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.99*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.23*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.73*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*32.47*	
		For Elevated Installation >40' Above Floor, Add	*35.71*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*19.48*	
26 05 33 13-2642	EA	1-1/4" Type C, Threaded, Two Hub Malleable Iron Conduit Body With Cover	133.80	30.09
		For Work In Restricted Working Space, Add	*22.57*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.52*	
		For Elevated Installation >15' To 20' Above Floor, Add	*15.05*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.81*	
		For Elevated Installation >25' To 30' Above Floor, Add	*26.33*	
		For Elevated Installation >30' To 35' Above Floor, Add	*30.09*	
		For Elevated Installation >35' To 40' Above Floor, Add	*37.62*	
		For Elevated Installation >40' Above Floor, Add	*41.38*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*22.57*	
26 05 33 13-2643	EA	1-1/2" Type C, Threaded, Two Hub Malleable Iron Conduit Body With Cover	158.75	32.98
		For Work In Restricted Working Space, Add	*24.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*8.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*16.49*	
		For Elevated Installation >20' To 25' Above Floor, Add	*20.61*	
		For Elevated Installation >25' To 30' Above Floor, Add	*28.85*	
		For Elevated Installation >30' To 35' Above Floor, Add	*32.98*	
		For Elevated Installation >35' To 40' Above Floor, Add	*41.22*	
		For Elevated Installation >40' Above Floor, Add	*45.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*24.73*	
26 05 33 13-2644	EA	2" Type C, Threaded, Two Hub Malleable Iron Conduit Body With Cover	208.74	39.57
		For Work In Restricted Working Space, Add	*29.68*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*34.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*39.57*	
		For Elevated Installation >35' To 40' Above Floor, Add	*49.47*	
		For Elevated Installation >40' Above Floor, Add	*54.41*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*29.68*	
26 05 33 13-2645	EA	2-1/2" Type C, Threaded, Two Hub Malleable Iron Conduit Body With Cover	449.61	104.40
		For Work In Restricted Working Space, Add	*78.26*	
		For Elevated Installation >10' To 15' Above Floor, Add	*26.09*	
		For Elevated Installation >15' To 20' Above Floor, Add	*52.17*	
		For Elevated Installation >20' To 25' Above Floor, Add	*65.22*	
		For Elevated Installation >25' To 30' Above Floor, Add	*91.30*	
		For Elevated Installation >30' To 35' Above Floor, Add	*104.34*	
		For Elevated Installation >35' To 40' Above Floor, Add	*130.43*	
		For Elevated Installation >40' Above Floor, Add	*143.47*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*78.26*	
26 05 33 13-2646	EA	3" Type C, Threaded, Two Hub Malleable Iron Conduit Body With Cover	455.25	74.19
		For Work In Restricted Working Space, Add	*55.65*	
		For Elevated Installation >10' To 15' Above Floor, Add	*18.55*	
		For Elevated Installation >15' To 20' Above Floor, Add	*37.10*	
		For Elevated Installation >20' To 25' Above Floor, Add	*46.38*	
		For Elevated Installation >25' To 30' Above Floor, Add	*64.93*	
		For Elevated Installation >30' To 35' Above Floor, Add	*74.20*	
		For Elevated Installation >35' To 40' Above Floor, Add	*92.75*	
		For Elevated Installation >40' Above Floor, Add	*102.03*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*55.65*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2647	EA	3-1/2" Type C, Threaded, Two Hub Malleable Iron Conduit Body With Cover	766.80	92.74
		For Work In Restricted Working Space, Add	*69.56*	
		For Elevated Installation >10' To 15' Above Floor, Add	*23.19*	
		For Elevated Installation >15' To 20' Above Floor, Add	*46.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*57.97*	
		For Elevated Installation >25' To 30' Above Floor, Add	*81.15*	
		For Elevated Installation >30' To 35' Above Floor, Add	*92.74*	
		For Elevated Installation >35' To 40' Above Floor, Add	*115.93*	
		For Elevated Installation >40' Above Floor, Add	*127.52*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*69.56*	
26 05 33 13-2648	EA	4" Type C, Threaded, Two Hub Malleable Iron Conduit Body With Cover	890.37	112.95
		For Work In Restricted Working Space, Add	*84.71*	
		For Elevated Installation >10' To 15' Above Floor, Add	*28.24*	
		For Elevated Installation >15' To 20' Above Floor, Add	*56.47*	
		For Elevated Installation >20' To 25' Above Floor, Add	*70.59*	
		For Elevated Installation >25' To 30' Above Floor, Add	*98.82*	
		For Elevated Installation >30' To 35' Above Floor, Add	*112.94*	
		For Elevated Installation >35' To 40' Above Floor, Add	*141.18*	
		For Elevated Installation >40' Above Floor, Add	*155.29*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*84.71*	

26 05 33 13-2649 Type X, Threaded, Four Hub Malleable Iron Conduit Body With Cover *(26 05 33 13-2604)*

26 05 33 13-2650	EA	1/2" Type X, Threaded, Four Hub Malleable Iron Conduit Body With Cover	93.79	25.97
		For Work In Restricted Working Space, Add	*19.48*	
		For Elevated Installation >10' To 15' Above Floor, Add	*6.49*	
		For Elevated Installation >15' To 20' Above Floor, Add	*12.98*	
		For Elevated Installation >20' To 25' Above Floor, Add	*16.23*	
		For Elevated Installation >25' To 30' Above Floor, Add	*22.72*	
		For Elevated Installation >30' To 35' Above Floor, Add	*25.97*	
		For Elevated Installation >35' To 40' Above Floor, Add	*32.46*	
		For Elevated Installation >40' Above Floor, Add	*35.71*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*19.48*	
26 05 33 13-2651	EA	3/4" Type X, Threaded, Four Hub Malleable Iron Conduit Body With Cover	102.08	28.86
		For Work In Restricted Working Space, Add	*21.64*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.21*	
		For Elevated Installation >15' To 20' Above Floor, Add	*14.43*	
		For Elevated Installation >20' To 25' Above Floor, Add	*18.04*	
		For Elevated Installation >25' To 30' Above Floor, Add	*25.25*	
		For Elevated Installation >30' To 35' Above Floor, Add	*28.86*	
		For Elevated Installation >35' To 40' Above Floor, Add	*36.07*	
		For Elevated Installation >40' Above Floor, Add	*39.68*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*21.64*	
26 05 33 13-2652	EA	1" Type X, Threaded, Four Hub Malleable Iron Conduit Body With Cover	120.45	31.74
		For Work In Restricted Working Space, Add	*23.81*	
		For Elevated Installation >10' To 15' Above Floor, Add	*7.94*	
		For Elevated Installation >15' To 20' Above Floor, Add	*15.87*	
		For Elevated Installation >20' To 25' Above Floor, Add	*19.84*	
		For Elevated Installation >25' To 30' Above Floor, Add	*27.77*	
		For Elevated Installation >30' To 35' Above Floor, Add	*31.74*	
		For Elevated Installation >35' To 40' Above Floor, Add	*39.68*	
		For Elevated Installation >40' Above Floor, Add	*43.64*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*23.81*	
26 05 33 13-2653	EA	1-1/4" Type X, Threaded, Four Hub Malleable Iron Conduit Body With Cover	144.95	36.28
		For Work In Restricted Working Space, Add	*27.21*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.07*	
		For Elevated Installation >15' To 20' Above Floor, Add	*18.14*	
		For Elevated Installation >20' To 25' Above Floor, Add	*22.67*	
		For Elevated Installation >25' To 30' Above Floor, Add	*31.74*	
		For Elevated Installation >30' To 35' Above Floor, Add	*36.28*	
		For Elevated Installation >35' To 40' Above Floor, Add	*45.35*	
		For Elevated Installation >40' Above Floor, Add	*49.88*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.21*	
26 05 33 13-2654	EA	1-1/2" Type X, Threaded, Four Hub Malleable Iron Conduit Body With Cover	169.73	39.57
		For Work In Restricted Working Space, Add	*29.68*	
		For Elevated Installation >10' To 15' Above Floor, Add	*9.89*	
		For Elevated Installation >15' To 20' Above Floor, Add	*19.79*	
		For Elevated Installation >20' To 25' Above Floor, Add	*24.73*	
		For Elevated Installation >25' To 30' Above Floor, Add	*34.63*	
		For Elevated Installation >30' To 35' Above Floor, Add	*39.57*	
		For Elevated Installation >35' To 40' Above Floor, Add	*49.47*	
		For Elevated Installation >40' Above Floor, Add	*54.41*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*29.68*	
26 05 33 13-2655	EA	2" Type X, Threaded, Four Hub Malleable Iron Conduit Body With Cover	244.85	48.64
		For Work In Restricted Working Space, Add	*36.48*	
		For Elevated Installation >10' To 15' Above Floor, Add	*12.16*	
		For Elevated Installation >15' To 20' Above Floor, Add	*24.32*	
		For Elevated Installation >20' To 25' Above Floor, Add	*30.40*	
		For Elevated Installation >25' To 30' Above Floor, Add	*42.56*	
		For Elevated Installation >30' To 35' Above Floor, Add	*48.64*	
		For Elevated Installation >35' To 40' Above Floor, Add	*60.80*	
		For Elevated Installation >40' Above Floor, Add	*66.88*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*36.48*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2656	EA	2-1/2" Type X, Threaded, Four Hub Malleable Iron Conduit Body With Cover	398.34	71.31
		For Work In Restricted Working Space, Add	*53.48*	
		For Elevated Installation >10' To 15' Above Floor, Add	*17.83*	
		For Elevated Installation >15' To 20' Above Floor, Add	*35.66*	
		For Elevated Installation >20' To 25' Above Floor, Add	*44.57*	
		For Elevated Installation >25' To 30' Above Floor, Add	*62.40*	
		For Elevated Installation >30' To 35' Above Floor, Add	*71.31*	
		For Elevated Installation >35' To 40' Above Floor, Add	*89.14*	
		For Elevated Installation >40' Above Floor, Add	*98.05*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*53.48*	
26 05 33 13-2657	EA	3" Type X, Threaded, Four Hub Malleable Iron Conduit Body With Cover	597.54	92.74
		For Work In Restricted Working Space, Add	*69.56*	
		For Elevated Installation >10' To 15' Above Floor, Add	*23.19*	
		For Elevated Installation >15' To 20' Above Floor, Add	*46.37*	
		For Elevated Installation >20' To 25' Above Floor, Add	*57.97*	
		For Elevated Installation >25' To 30' Above Floor, Add	*81.15*	
		For Elevated Installation >30' To 35' Above Floor, Add	*92.74*	
		For Elevated Installation >35' To 40' Above Floor, Add	*115.93*	
		For Elevated Installation >40' Above Floor, Add	*127.52*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*69.56*	
26 05 33 13-2658	EA	3-1/2" Type X, Threaded, Four Hub Malleable Iron Conduit Body With Cover	918.84	114.59
		For Work In Restricted Working Space, Add	*85.94*	
		For Elevated Installation >10' To 15' Above Floor, Add	*28.65*	
		For Elevated Installation >15' To 20' Above Floor, Add	*57.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*71.62*	
		For Elevated Installation >25' To 30' Above Floor, Add	*100.27*	
		For Elevated Installation >30' To 35' Above Floor, Add	*114.59*	
		For Elevated Installation >35' To 40' Above Floor, Add	*143.24*	
		For Elevated Installation >40' Above Floor, Add	*157.56*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*85.94*	
26 05 33 13-2659	EA	4" Type X, Threaded, Four Hub Malleable Iron Conduit Body With Cover	1,015.60	137.68
		For Work In Restricted Working Space, Add	*103.26*	
		For Elevated Installation >10' To 15' Above Floor, Add	*34.42*	
		For Elevated Installation >15' To 20' Above Floor, Add	*68.84*	
		For Elevated Installation >20' To 25' Above Floor, Add	*86.05*	
		For Elevated Installation >25' To 30' Above Floor, Add	*120.47*	
		For Elevated Installation >30' To 35' Above Floor, Add	*137.68*	
		For Elevated Installation >35' To 40' Above Floor, Add	*172.10*	
		For Elevated Installation >40' Above Floor, Add	*189.30*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*103.26*	

26 05 33 13-2660 Set Screw, Cast Aluminum Conduit Body *(26 05 33 13-2547)*

Note: For use with Electrical Metallic Tubing (EMT)

26 05 33 13-2661 Type LB, Set Screw, Two Hub Cast Aluminum Conduit Body With Cover *(26 05 33 13-2660)*

26 05 33 13-2662	EA	1/2" Type LB, Set Screw, Two Hub Cast Aluminum Conduit Body With Cover	33.27	7.83
		For Work In Restricted Working Space, Add	*5.87*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.96*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.92*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.90*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.85*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.83*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.79*	
		For Elevated Installation >40' Above Floor, Add	*10.77*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.87*	
26 05 33 13-2663	EA	3/4" Type LB, Set Screw, Two Hub Cast Aluminum Conduit Body With Cover	42.22	10.31
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.88*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	
26 05 33 13-2664	EA	1" Type LB, Set Screw, Two Hub Cast Aluminum Conduit Body With Cover	58.52	12.77
		For Work In Restricted Working Space, Add	*9.59*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.20*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.39*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.99*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.18*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.78*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.98*	
		For Elevated Installation >40' Above Floor, Add	*17.57*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.59*	
26 05 33 13-2665	EA	1-1/4" Type LB, Set Screw, Two Hub Cast Aluminum Conduit Body With Cover	76.95	15.66
		For Work In Restricted Working Space, Add	*11.75*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.92*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.83*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.79*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.66*	
		For Elevated Installation >35' To 40' Above Floor, Add	*19.58*	
		For Elevated Installation >40' Above Floor, Add	*21.54*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.75*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2666	EA	1-1/2" Type LB, Set Screw, Two Hub Cast Aluminum Conduit Body With Cover	104.12	18.14
		For Work In Restricted Working Space, Add	*13.60*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.53*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.07*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.34*	
		For Elevated Installation >25' To 30' Above Floor, Add	*15.87*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.14*	
		For Elevated Installation >35' To 40' Above Floor, Add	*22.67*	
		For Elevated Installation >40' Above Floor, Add	*24.94*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
26 05 33 13-2667	EA	2" Type LB, Set Screw, Two Hub Cast Aluminum Conduit Body With Cover	141.98	20.61
		For Work In Restricted Working Space, Add	*15.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.76*	
		For Elevated Installation >40' Above Floor, Add	*28.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.46*	

26 05 33 13-2668 Type LL Or LR, Set Screw, Two Hub Cast Aluminum Conduit Body With Cover *(26 05 33 13-2660)*

26 05 33 13-2669	EA	1/2" Type LL Or LR, Set Screw, Two Hub Cast Aluminum Conduit Body With Cover	33.65	7.83
		For Work In Restricted Working Space, Add	*5.87*	
		For Elevated Installation >10' To 15' Above Floor, Add	*1.96*	
		For Elevated Installation >15' To 20' Above Floor, Add	*3.92*	
		For Elevated Installation >20' To 25' Above Floor, Add	*4.90*	
		For Elevated Installation >25' To 30' Above Floor, Add	*6.85*	
		For Elevated Installation >30' To 35' Above Floor, Add	*7.83*	
		For Elevated Installation >35' To 40' Above Floor, Add	*9.79*	
		For Elevated Installation >40' Above Floor, Add	*10.77*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.87*	
26 05 33 13-2670	EA	3/4" Type LL Or LR, Set Screw, Two Hub Cast Aluminum Conduit Body With Cover	43.66	10.31
		For Work In Restricted Working Space, Add	*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add	*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add	*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add	*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add	*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add	*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add	*12.88*	
		For Elevated Installation >40' Above Floor, Add	*14.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.73*	
26 05 33 13-2671	EA	1" Type LL Or LR, Set Screw, Two Hub Cast Aluminum Conduit Body With Cover	53.49	12.77
		For Work In Restricted Working Space, Add	*9.59*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.20*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.39*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.99*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.18*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.78*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.98*	
		For Elevated Installation >40' Above Floor, Add	*17.57*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.59*	
26 05 33 13-2672	EA	1-1/4" Type LL Or LR, Set Screw, Two Hub Cast Aluminum Conduit Body With Cover	76.52	15.66
		For Work In Restricted Working Space, Add	*11.75*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.92*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.83*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.79*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.66*	
		For Elevated Installation >35' To 40' Above Floor, Add	*19.58*	
		For Elevated Installation >40' Above Floor, Add	*21.54*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.75*	
26 05 33 13-2673	EA	1-1/2" Type LL Or LR, Set Screw, Two Hub Cast Aluminum Conduit Body With Cover	95.76	18.14
		For Work In Restricted Working Space, Add	*13.60*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.53*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.07*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.34*	
		For Elevated Installation >25' To 30' Above Floor, Add	*15.87*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.14*	
		For Elevated Installation >35' To 40' Above Floor, Add	*22.67*	
		For Elevated Installation >40' Above Floor, Add	*24.94*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
26 05 33 13-2674	EA	2" Type LL Or LR, Set Screw, Two Hub Cast Aluminum Conduit Body With Cover	141.26	20.61
		For Work In Restricted Working Space, Add	*15.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.76*	
		For Elevated Installation >40' Above Floor, Add	*28.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.46*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2675		Type T, Set Screw, Three Hub Cast Aluminum Conduit Body With Cover *(26 05 33 13-2660)*			
26 05 33 13-2676	EA	1/2" Type T, Set Screw, Three Hub Cast Aluminum Conduit Body With Cover		43.00	10.31
		For Work In Restricted Working Space, Add		*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add		*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add		*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add		*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add		*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add		*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add		*12.88*	
		For Elevated Installation >40' Above Floor, Add		*14.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*7.73*	
26 05 33 13-2677	EA	3/4" Type T, Set Screw, Three Hub Cast Aluminum Conduit Body With Cover		56.79	12.77
		For Work In Restricted Working Space, Add		*9.59*	
		For Elevated Installation >10' To 15' Above Floor, Add		*3.20*	
		For Elevated Installation >15' To 20' Above Floor, Add		*6.39*	
		For Elevated Installation >20' To 25' Above Floor, Add		*7.99*	
		For Elevated Installation >25' To 30' Above Floor, Add		*11.18*	
		For Elevated Installation >30' To 35' Above Floor, Add		*12.78*	
		For Elevated Installation >35' To 40' Above Floor, Add		*15.98*	
		For Elevated Installation >40' Above Floor, Add		*17.57*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*9.59*	
26 05 33 13-2678	EA	1" Type T, Set Screw, Three Hub Cast Aluminum Conduit Body With Cover		68.20	15.66
		For Work In Restricted Working Space, Add		*11.75*	
		For Elevated Installation >10' To 15' Above Floor, Add		*3.92*	
		For Elevated Installation >15' To 20' Above Floor, Add		*7.83*	
		For Elevated Installation >20' To 25' Above Floor, Add		*9.79*	
		For Elevated Installation >25' To 30' Above Floor, Add		*13.71*	
		For Elevated Installation >30' To 35' Above Floor, Add		*15.66*	
		For Elevated Installation >35' To 40' Above Floor, Add		*19.58*	
		For Elevated Installation >40' Above Floor, Add		*21.54*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*11.75*	
26 05 33 13-2679	EA	1-1/4" Type T, Set Screw, Three Hub Cast Aluminum Conduit Body With Cover		97.53	18.14
		For Work In Restricted Working Space, Add		*14.22*	
		For Elevated Installation >10' To 15' Above Floor, Add		*4.74*	
		For Elevated Installation >15' To 20' Above Floor, Add		*9.48*	
		For Elevated Installation >20' To 25' Above Floor, Add		*11.85*	
		For Elevated Installation >25' To 30' Above Floor, Add		*16.59*	
		For Elevated Installation >30' To 35' Above Floor, Add		*18.96*	
		For Elevated Installation >35' To 40' Above Floor, Add		*23.70*	
		For Elevated Installation >40' Above Floor, Add		*26.07*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*14.22*	
26 05 33 13-2680	EA	1-1/2" Type T, Set Screw, Three Hub Cast Aluminum Conduit Body With Cover		127.51	20.61
		For Work In Restricted Working Space, Add		*16.70*	
		For Elevated Installation >10' To 15' Above Floor, Add		*5.57*	
		For Elevated Installation >15' To 20' Above Floor, Add		*11.13*	
		For Elevated Installation >20' To 25' Above Floor, Add		*13.91*	
		For Elevated Installation >25' To 30' Above Floor, Add		*19.48*	
		For Elevated Installation >30' To 35' Above Floor, Add		*22.26*	
		For Elevated Installation >35' To 40' Above Floor, Add		*27.83*	
		For Elevated Installation >40' Above Floor, Add		*30.61*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*16.70*	
26 05 33 13-2681	EA	2" Type T, Set Screw, Three Hub Cast Aluminum Conduit Body With Cover		176.81	23.08
		For Work In Restricted Working Space, Add		*19.17*	
		For Elevated Installation >10' To 15' Above Floor, Add		*6.39*	
		For Elevated Installation >15' To 20' Above Floor, Add		*12.78*	
		For Elevated Installation >20' To 25' Above Floor, Add		*15.97*	
		For Elevated Installation >25' To 30' Above Floor, Add		*22.36*	
		For Elevated Installation >30' To 35' Above Floor, Add		*25.56*	
		For Elevated Installation >35' To 40' Above Floor, Add		*31.95*	
		For Elevated Installation >40' Above Floor, Add		*35.14*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*19.17*	
26 05 33 13-2682		Type C, Set Screw, Two Hub Cast Aluminum Conduit Body With Cover *(26 05 33 13-2660)*			
26 05 33 13-2683	EA	1/2" Type C, Set Screw, Two Hub Cast Aluminum Conduit Body With Cover		34.88	7.83
		For Work In Restricted Working Space, Add		*5.87*	
		For Elevated Installation >10' To 15' Above Floor, Add		*1.96*	
		For Elevated Installation >15' To 20' Above Floor, Add		*3.92*	
		For Elevated Installation >20' To 25' Above Floor, Add		*4.90*	
		For Elevated Installation >25' To 30' Above Floor, Add		*6.85*	
		For Elevated Installation >30' To 35' Above Floor, Add		*7.83*	
		For Elevated Installation >35' To 40' Above Floor, Add		*9.79*	
		For Elevated Installation >40' Above Floor, Add		*10.77*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*5.87*	
26 05 33 13-2684	EA	3/4" Type C, Set Screw, Two Hub Cast Aluminum Conduit Body With Cover		46.87	10.31
		For Work In Restricted Working Space, Add		*7.73*	
		For Elevated Installation >10' To 15' Above Floor, Add		*2.58*	
		For Elevated Installation >15' To 20' Above Floor, Add		*5.15*	
		For Elevated Installation >20' To 25' Above Floor, Add		*6.44*	
		For Elevated Installation >25' To 30' Above Floor, Add		*9.02*	
		For Elevated Installation >30' To 35' Above Floor, Add		*10.30*	
		For Elevated Installation >35' To 40' Above Floor, Add		*12.88*	
		For Elevated Installation >40' Above Floor, Add		*14.17*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*7.73*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 13-2685	EA	1" Type C, Set Screw, Two Hub Cast Aluminum Conduit Body With Cover	60.34	12.77
		For Work In Restricted Working Space, Add	*9.59*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.20*	
		For Elevated Installation >15' To 20' Above Floor, Add	*6.39*	
		For Elevated Installation >20' To 25' Above Floor, Add	*7.99*	
		For Elevated Installation >25' To 30' Above Floor, Add	*11.18*	
		For Elevated Installation >30' To 35' Above Floor, Add	*12.78*	
		For Elevated Installation >35' To 40' Above Floor, Add	*15.98*	
		For Elevated Installation >40' Above Floor, Add	*17.57*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.59*	
26 05 33 13-2686	EA	1-1/4" Type C, Set Screw, Two Hub Cast Aluminum Conduit Body With Cover	79.13	15.66
		For Work In Restricted Working Space, Add	*11.75*	
		For Elevated Installation >10' To 15' Above Floor, Add	*3.92*	
		For Elevated Installation >15' To 20' Above Floor, Add	*7.83*	
		For Elevated Installation >20' To 25' Above Floor, Add	*9.79*	
		For Elevated Installation >25' To 30' Above Floor, Add	*13.71*	
		For Elevated Installation >30' To 35' Above Floor, Add	*15.66*	
		For Elevated Installation >35' To 40' Above Floor, Add	*19.58*	
		For Elevated Installation >40' Above Floor, Add	*21.54*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.75*	
26 05 33 13-2687	EA	1-1/2" Type C, Set Screw, Two Hub Cast Aluminum Conduit Body With Cover	97.26	18.14
		For Work In Restricted Working Space, Add	*13.60*	
		For Elevated Installation >10' To 15' Above Floor, Add	*4.53*	
		For Elevated Installation >15' To 20' Above Floor, Add	*9.07*	
		For Elevated Installation >20' To 25' Above Floor, Add	*11.34*	
		For Elevated Installation >25' To 30' Above Floor, Add	*15.87*	
		For Elevated Installation >30' To 35' Above Floor, Add	*18.14*	
		For Elevated Installation >35' To 40' Above Floor, Add	*22.67*	
		For Elevated Installation >40' Above Floor, Add	*24.94*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.60*	
26 05 33 13-2688	EA	2" Type C, Set Screw, Two Hub Cast Aluminum Conduit Body With Cover	155.21	20.61
		For Work In Restricted Working Space, Add	*15.46*	
		For Elevated Installation >10' To 15' Above Floor, Add	*5.15*	
		For Elevated Installation >15' To 20' Above Floor, Add	*10.30*	
		For Elevated Installation >20' To 25' Above Floor, Add	*12.88*	
		For Elevated Installation >25' To 30' Above Floor, Add	*18.03*	
		For Elevated Installation >30' To 35' Above Floor, Add	*20.61*	
		For Elevated Installation >35' To 40' Above Floor, Add	*25.76*	
		For Elevated Installation >40' Above Floor, Add	*28.34*	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.46*	
26 05 33 13-2689		**Aluminum Type LB Telecommunications Conduit Bodies With Cover (Smart Pathways)** *(26 05 33 13-2547)*		
26 05 33 13-2690	EA	3/4" To 1-1/4" Aluminum Type LB Telecommunications Conduit Body With Cover (Smart Pathways KBLB120)	163.32	22.57
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.94*	
26 05 33 13-2691	EA	1-1/2" To 2-1/2" Aluminum Type LB Telecommunications Conduit Body With Cover (Smart Pathways KBLB250)	629.76	41.73
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*31.32*	
26 05 33 13-2692	EA	3" To 4" Aluminum Type LB Telecommunications Conduit Body With Cover (Smart Pathways KBLB400)	1,209.38	84.71
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*63.53*	
26 05 33 13-2693		**Replacement Covers And Gaskets For Conduit Body** *(26 05 33 13-2547)*		
26 05 33 13-2694		**Replacement Stamped Aluminum Conduit Body Cover** *(26 05 33 13-2693)*		
26 05 33 13-2695	EA	1/2" Replacement Stamped Aluminum Conduit Body Cover	11.89	4.02
26 05 33 13-2696	EA	3/4" Replacement Stamped Aluminum Conduit Body Cover	14.77	4.69
26 05 33 13-2697	EA	1" Replacement Stamped Aluminum Conduit Body Cover	18.89	6.03
26 05 33 13-2698	EA	1-1/4" Replacement Stamped Aluminum Conduit Body Cover	22.98	7.37
26 05 33 13-2699	EA	1-1/2" Replacement Stamped Aluminum Conduit Body Cover	28.57	8.70
26 05 33 13-2700	EA	2" Replacement Stamped Aluminum Conduit Body Cover	34.14	10.05
26 05 33 13-2701	EA	2-1/2" Replacement Stamped Aluminum Conduit Body Cover	47.07	11.39
26 05 33 13-2702	EA	3" Replacement Stamped Aluminum Conduit Body Cover	59.12	16.07
26 05 33 13-2703	EA	3-1/2" Replacement Stamped Aluminum Conduit Body Cover	64.05	18.09
26 05 33 13-2704	EA	4" Replacement Stamped Aluminum Conduit Body Cover	80.74	22.77
26 05 33 13-2705		**Replacement Cast Steel Conduit Body Cover** *(26 05 33 13-2693)*		
26 05 33 13-2706	EA	1/2" Replacement Cast Steel Conduit Body Cover	14.52	4.02
26 05 33 13-2707	EA	3/4" Replacement Cast Steel Conduit Body Cover	17.05	4.69
26 05 33 13-2708	EA	1" Replacement Cast Steel Conduit Body Cover	24.53	6.03
26 05 33 13-2709	EA	1-1/4" Replacement Cast Steel Conduit Body Cover	30.62	7.37
26 05 33 13-2710	EA	1-1/2" Replacement Cast Steel Conduit Body Cover	37.47	8.70
26 05 33 13-2711	EA	2" Replacement Cast Steel Conduit Body Cover	44.32	10.05
26 05 33 13-2712	EA	2-1/2" Replacement Cast Steel Conduit Body Cover	51.11	11.39
26 05 33 13-2713	EA	3" Replacement Cast Steel Conduit Body Cover	68.67	16.07
26 05 33 13-2714	EA	3-1/2" Replacement Cast Steel Conduit Body Cover	79.09	18.09
26 05 33 13-2715	EA	4" Replacement Cast Steel Conduit Body Cover	99.77	22.77
26 05 33 13-2716		**Replacement Velbuna Composition Conduit Body Gasket** *(26 05 33 13-2693)*		
26 05 33 13-2717	EA	1/2" Replacement Velbuna Composition Conduit Body Gasket	10.72	4.02
26 05 33 13-2718	EA	3/4" Replacement Velbuna Composition Conduit Body Gasket	12.14	4.69

copyright 2026 The Gordian Group, Inc.

	MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
	26 05 33 13-2719	EA	1" Replacement Velbuna Composition Conduit Body Gasket	15.95	6.03
	26 05 33 13-2720	EA	1-1/4" Replacement Velbuna Composition Conduit Body Gasket	21.20	7.37
	26 05 33 13-2721	EA	1-1/2" Replacement Velbuna Composition Conduit Body Gasket	23.88	8.70
	26 05 33 13-2722	EA	2" Replacement Velbuna Composition Conduit Body Gasket	28.72	10.05
	26 05 33 13-2723	EA	2-1/2" Replacement Velbuna Composition Conduit Body Gasket	39.65	11.39
	26 05 33 13-2724	EA	3" Replacement Velbuna Composition Conduit Body Gasket	49.86	16.07
	26 05 33 13-2725	EA	3-1/2" Replacement Velbuna Composition Conduit Body Gasket	55.29	18.09
	26 05 33 13-2726	EA	4" Replacement Velbuna Composition Conduit Body Gasket	64.56	22.77
	26 05 33 13-2727		Replacement Neoprene Conduit Body Gasket *(26 05 33 13-2693)*		
	26 05 33 13-2728	EA	1/2" Replacement Neoprene Conduit Body Gasket	12.54	4.02
	26 05 33 13-2729	EA	3/4" Replacement Neoprene Conduit Body Gasket	13.88	4.69
	26 05 33 13-2730	EA	1" Replacement Neoprene Conduit Body Gasket	18.24	6.03
	26 05 33 13-2731	EA	1-1/4" Replacement Neoprene Conduit Body Gasket	22.36	7.37
	26 05 33 13-2732	EA	1-1/2" Replacement Neoprene Conduit Body Gasket	25.04	8.70
	26 05 33 13-2733	EA	2" Replacement Neoprene Conduit Body Gasket	28.84	10.05
	26 05 33 13-2734	EA	2-1/2" Replacement Neoprene Conduit Body Gasket	39.94	11.39
	26 05 33 13-2735	EA	3" Replacement Neoprene Conduit Body Gasket	50.15	16.07
	26 05 33 13-2736	EA	3-1/2" Replacement Neoprene Conduit Body Gasket	57.23	18.09
	26 05 33 13-2737	EA	4" Replacement Neoprene Conduit Body Gasket	66.50	22.77
	26 05 33 13-2738		Cutting Knockouts In-Place Metal Boxes Or Enclosures *(26 05 33 13-0058)*		
			Note: For use when connecting conduit to an existing in-place system.		
	26 05 33 13-2739	EA	1/2", Cutting Knockouts In-Place Metal Boxes Or Enclosures	17.06	
			For Work In Restricted Working Space, Add	*5.12*	
	26 05 33 13-2740	EA	3/4", Cutting Knockouts In-Place Metal Boxes Or Enclosures	19.21	
			For Work In Restricted Working Space, Add	*5.76*	
	26 05 33 13-2741	EA	1", Cutting Knockouts In-Place Metal Boxes Or Enclosures	22.60	
			For Work In Restricted Working Space, Add	*6.78*	
	26 05 33 13-2742	EA	1-1/4", Cutting Knockouts In-Place Metal Boxes Or Enclosures	25.08	
			For Work In Restricted Working Space, Add	*7.52*	
	26 05 33 13-2743	EA	1-1/2", Cutting Knockouts In-Place Metal Boxes Or Enclosures	28.25	
			For Work In Restricted Working Space, Add	*8.48*	
	26 05 33 13-2744	EA	2", Cutting Knockouts In-Place Metal Boxes Or Enclosures	33.45	
			For Work In Restricted Working Space, Add	*10.04*	
	26 05 33 13-2745	EA	2-1/2", Cutting Knockouts In-Place Metal Boxes Or Enclosures	39.55	
			For Work In Restricted Working Space, Add	*11.87*	
	26 05 33 13-2746	EA	3", Cutting Knockouts In-Place Metal Boxes Or Enclosures	45.20	
			For Work In Restricted Working Space, Add	*13.56*	
	26 05 33 13-2747	EA	3-1/2", Cutting Knockouts In-Place Metal Boxes Or Enclosures	50.85	
			For Work In Restricted Working Space, Add	*15.26*	
	26 05 33 13-2748	EA	4", Cutting Knockouts In-Place Metal Boxes Or Enclosures	56.50	
			For Work In Restricted Working Space, Add	*16.95*	
	26 05 33 13-2749		Buried Pipe Or Conduit Wrap *(26 05 33 13)*		
	26 05 33 13-2750		All-Weather Corrosion Protection Tape For Pipe Or Conduit *(26 05 33 13-2749)*		
			Note: Priced by the linear feet of pipe or conduit the tape is installed on.		
	26 05 33 13-2751	LF	Pipe Or Conduit Wrap For 1/2" Diameter Pipe, 10 Mil, All-Weather Corrosion Protection Tape (3M Scotchrap 50)	2.59	
	26 05 33 13-2752	LF	Pipe Or Conduit Wrap For 3/4" Diameter Pipe, 10 Mil, All-Weather Corrosion Protection Tape (3M Scotchrap 50)	3.00	
	26 05 33 13-2753	LF	Pipe Or Conduit Wrap For 1" Diameter Pipe, 10 Mil, All-Weather Corrosion Protection Tape (3M Scotchrap 50)	3.49	
	26 05 33 13-2754	LF	Pipe Or Conduit Wrap For 1-1/4" Diameter Pipe, 10 Mil, All-Weather Corrosion Protection Tape (3M Scotchrap 50)	4.03	
	26 05 33 13-2755	LF	Pipe Or Conduit Wrap For 1-1/2" Diameter Pipe, 10 Mil, All-Weather Corrosion Protection Tape (3M Scotchrap 50)	4.60	
	26 05 33 13-2756	LF	Pipe Or Conduit Wrap For 2" Diameter Pipe, 10 Mil, All-Weather Corrosion Protection Tape (3M Scotchrap 50)	5.56	
	26 05 33 13-2757	LF	Pipe Or Conduit Wrap For 2-1/2" Diameter Pipe, 10 Mil, All-Weather Corrosion Protection Tape (3M Scotchrap 50)	6.16	
	26 05 33 13-2758	LF	Pipe Or Conduit Wrap For 3" Diameter Pipe, 10 Mil, All-Weather Corrosion Protection Tape (3M Scotchrap 50)	6.75	
	26 05 33 13-2759	LF	Pipe Or Conduit Wrap For 4" Diameter Pipe, 10 Mil, All-Weather Corrosion Protection Tape (3M Scotchrap 50)	8.42	
	26 05 33 13-2760	LF	Pipe Or Conduit Wrap For 5" Diameter Pipe, 10 Mil, All-Weather Corrosion Protection Tape (3M Scotchrap 50)	9.77	
	26 05 33 13-2761	LF	Pipe Or Conduit Wrap For 6" Diameter Pipe, 10 Mil, All-Weather Corrosion Protection Tape (3M Scotchrap 50)	11.11	
	26 05 33 13-2762	LF	Pipe Or Conduit Wrap For 1/2" Diameter Pipe, 20 Mil, All-Weather Corrosion Protection Tape (3M Scotchrap 51)	2.61	
	26 05 33 13-2763	LF	Pipe Or Conduit Wrap For 3/4" Diameter Pipe, 20 Mil, All-Weather Corrosion Protection Tape (3M Scotchrap 51)	3.13	
	26 05 33 13-2764	LF	Pipe Or Conduit Wrap For 1" Diameter Pipe, 20 Mil, All-Weather Corrosion Protection Tape (3M Scotchrap 51)	3.66	
	26 05 33 13-2765	LF	Pipe Or Conduit Wrap For 1-1/4" Diameter Pipe, 20 Mil, All-Weather Corrosion Protection Tape (3M Scotchrap 51)	4.25	
	26 05 33 13-2766	LF	Pipe Or Conduit Wrap For 1-1/2" Diameter Pipe, 20 Mil, All-Weather Corrosion Protection Tape (3M Scotchrap 51)	4.88	
	26 05 33 13-2767	LF	Pipe Or Conduit Wrap For 2" Diameter Pipe, 20 Mil, All-Weather Corrosion Protection Tape (3M Scotchrap 51)	5.95	
	26 05 33 13-2768	LF	Pipe Or Conduit Wrap For 2-1/2" Diameter Pipe, 20 Mil, All-Weather Corrosion Protection Tape (3M Scotchrap 51)	6.77	
	26 05 33 13-2769	LF	Pipe Or Conduit Wrap For 3" Diameter Pipe, 20 Mil, All-Weather Corrosion Protection Tape (3M Scotchrap 51)	7.64	
	26 05 33 13-2770	LF	Pipe Or Conduit Wrap For 4" Diameter Pipe, 20 Mil, All-Weather Corrosion Protection Tape (3M Scotchrap 51)	9.62	
	26 05 33 13-2771	LF	Pipe Or Conduit Wrap For 5" Diameter Pipe, 20 Mil, All-Weather Corrosion Protection Tape (3M Scotchrap 51)	11.27	
	26 05 33 13-2772	LF	Pipe Or Conduit Wrap For 6" Diameter Pipe, 20 Mil, All-Weather Corrosion Protection Tape (3M Scotchrap 51)	12.91	

26 05 33 16 Boxes for Electrical Systems *(26 05 33)*

See CSI section 26 27 16 00-0000 for larger junction boxes and enclosures.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 16-0001		**Steel Junction, Device, And Fixture Boxes, Rings And Covers** *(26 05 33 16)* Note: Thin wall metal. See CSI section 26 27 26 00-0003 for steel box/receptacle assemblies, 26 27 26 00-0136 for steel box/switch assemblies.		
26 05 33 16-0002		**4" Square Steel Boxes, Rings And Covers** *(26 05 33 16-0001)*		
26 05 33 16-0003	EA	1-1/2" Depth, 4" Square Steel Box	36.41	16.92
		For Stud Bracket, Add	*0.63*	
26 05 33 16-0004	EA	2-1/8" Depth, 4" Square Steel Box	37.58	16.92
		For Stud Bracket, Add	*1.14*	
26 05 33 16-0005	EA	3-1/2" Depth, 4" Square Steel Box	41.60	16.92
		For Stud Bracket, Add	*1.24*	
26 05 33 16-0006	EA	1-1/2" Depth, 4" Square Steel Extension Ring	28.28	11.28
26 05 33 16-0007	EA	2-1/8" Depth, 4" Square Steel Extension Ring	24.22	11.28
26 05 33 16-0008	EA	1/2" Depth, 1 Gang, 4" Square Steel Mud Ring	12.51	5.64
26 05 33 16-0009	EA	5/8" Depth, 1 Gang, 4" Square Steel Mud Ring	12.69	5.64
26 05 33 16-0010	EA	3/4" Depth, 1 Gang, 4" Square Steel Mud Ring	12.83	5.64
26 05 33 16-0011	EA	1" Depth, 1 Gang, 4" Square Steel Mud Ring	13.26	5.64
26 05 33 16-0012	EA	1-1/4" Depth, 1 Gang, 4" Square Steel Mud Ring	13.39	5.64
26 05 33 16-0013	EA	1-1/2" Depth, 1 Gang, 4" Square Steel Mud Ring	14.78	5.64
26 05 33 16-0014	EA	1/2" Depth, 2 Gang, 4" Square Steel Mud Ring	13.03	5.64
26 05 33 16-0015	EA	5/8" Depth, 2 Gang, 4" Square Steel Mud Ring	13.17	5.64
26 05 33 16-0016	EA	3/4" Depth, 2 Gang, 4" Square Steel Mud Ring	13.33	5.64
26 05 33 16-0017	EA	1" Depth, 2 Gang, 4" Square Steel Mud Ring	14.75	5.64
26 05 33 16-0018	EA	1-1/4" Depth, 2 Gang, 4" Square Steel Mud Ring	15.05	5.64
26 05 33 16-0019	EA	1-1/2" Depth, 2 Gang, 4" Square Steel Mud Ring	16.85	5.64
26 05 33 16-0020	EA	3/4" Depth, Fixture Cover, 4" Square Mud Rings	13.73	5.64
26 05 33 16-0021	EA	1" Depth, Fixture Cover, 4" Square Mud Rings	14.87	5.64
26 05 33 16-0022	EA	One Toggle Switch, 4" Square Steel Exposed Work Cover	13.01	5.64
26 05 33 16-0023	EA	Two Toggle Switches, 4" Square Steel Exposed Work Cover	13.12	5.64
26 05 33 16-0024	EA	One Duplex Receptacle, 4" Square Steel Exposed Work Cover	12.99	5.64
26 05 33 16-0025	EA	Two Duplex Receptacles, 4" Square Steel Exposed Work Cover	13.29	5.64
26 05 33 16-0026	EA	One Toggle Switch And One Duplex Receptacle, 4" Square Steel Exposed Work Cover	13.55	5.64
26 05 33 16-0027	EA	One Toggle Switch And One 1.406" Diameter Receptacle, 4" Square Steel Exposed Work Cover	16.73	5.64
26 05 33 16-0028	EA	One 1.406" Diameter Receptacle, 4" Square Steel Exposed Work Cover	13.50	5.64
26 05 33 16-0029	EA	Two 1.406" Diameter Receptacles, 4" Square Steel Exposed Work Cover	16.73	5.64
26 05 33 16-0030	EA	One 1.620" Diameter Receptacle, 4" Square Steel Exposed Work Cover	13.50	5.64
26 05 33 16-0031	EA	One 1.719" Diameter Receptacle, 4" Square Steel Exposed Work Cover	14.25	5.64
26 05 33 16-0032	EA	One 2.165" Diameter Receptacle, 4" Square Steel Exposed Work Cover	16.73	5.64
26 05 33 16-0033	EA	One 2.480" Diameter Receptacle, 4" Square Steel Exposed Work Cover	16.73	5.64
26 05 33 16-0034	EA	Flat, 4" Square Steel Exposed Work Cover	12.10	5.64
26 05 33 16-0035		**4-11/16" Square Steel Boxes, Rings And Covers** *(26 05 33 16-0001)*		
26 05 33 16-0036	EA	1-1/2" Depth, 4-11/16" Square Steel Box	40.74	16.92
26 05 33 16-0037	EA	2-1/8" Depth, 4-11/16" Square Steel Box	38.10	16.92
		For Stud Bracket, Add	*0.59*	
26 05 33 16-0038	EA	3-1/4" Depth, 4-11/16" Square Steel Box	51.38	16.92
26 05 33 16-0039	EA	1-1/2" Depth, 4-11/16" Square Extension Ring	29.39	11.28
26 05 33 16-0040	EA	2-1/8" Depth, 4-11/16" Square Extension Ring	30.04	11.28
26 05 33 16-0041	EA	1/2" Depth, 1 Gang, 4-11/16" Square Steel Mud Ring	15.15	5.64
26 05 33 16-0042	EA	5/8" Depth, 1 Gang, 4-11/16" Square Steel Mud Ring	15.18	5.64
26 05 33 16-0043	EA	3/4" Depth, 1 Gang, 4-11/16" Square Steel Mud Ring	16.31	5.64
26 05 33 16-0044	EA	1" Depth, 1 Gang, 4-11/16" Square Steel Mud Ring	15.86	5.64
26 05 33 16-0045	EA	1-1/4" Depth, 1 Gang, 4-11/16" Square Steel Mud Ring	15.76	5.64
26 05 33 16-0046	EA	1-1/2" Depth, 1 Gang, 4-11/16" Square Steel Mud Ring	20.45	5.64
26 05 33 16-0047	EA	1/2" Depth, 2 Gang, 4-11/16" Square Steel Mud Ring	16.05	5.64
26 05 33 16-0048	EA	5/8" Depth, 2 Gang, 4-11/16" Square Steel Mud Ring	16.29	5.64
26 05 33 16-0049	EA	3/4" Depth, 2 Gang, 4-11/16" Square Steel Mud Ring	16.31	5.64
26 05 33 16-0050	EA	1" Depth, 2 Gang, 4-11/16" Square Steel Mud Ring	17.97	5.64
26 05 33 16-0051	EA	1-1/4" Depth, 2 Gang, 4-11/16" Square Steel Mud Ring	18.32	5.64
26 05 33 16-0052	EA	1-1/2" Depth, 2 Gang, 4-11/16" Square Steel Mud Ring	22.33	5.64
26 05 33 16-0053	EA	1/2" Depth, Fixture Cover, 4-11/16" Square Steel Mud Ring	15.83	5.64
26 05 33 16-0054	EA	5/8" Depth, Fixture Cover, 4-11/16" Square Steel Mud Ring	15.95	5.64
26 05 33 16-0055	EA	One Toggle Switch, 4-11/16" Square Steel Exposed Work Cover	19.06	5.64
26 05 33 16-0056	EA	Two Toggle Switches, 4-11/16" Square Steel Exposed Work Cover	19.94	5.64
26 05 33 16-0057	EA	One Duplex Receptacle, 4-11/16" Square Steel Exposed Work Cover	18.80	5.64
26 05 33 16-0058	EA	Two Duplex Receptacles, 4-11/16" Square Steel Exposed Work Cover	17.86	5.64
26 05 33 16-0059	EA	One Toggle Switch And One Duplex Receptacle, 4-11/16" Square Steel Exposed Work Cover	21.03	5.64
26 05 33 16-0060	EA	One 1.594" Diameter Receptacle, 4-11/16" Square Steel Exposed Work Cover	19.93	5.64
26 05 33 16-0061	EA	One 2.141" Diameter Receptacle, 4-11/16" Square Steel Exposed Work Cover	19.93	5.64
26 05 33 16-0062	EA	One 2.625" Diameter Receptacle, 4-11/16" Square Steel Exposed Work Cover	19.93	5.64
26 05 33 16-0063	EA	Flat, 4-11/16" Square Steel Exposed Work Cover	12.82	5.64
26 05 33 16-0064		**Steel Square Box Brackets** *(26 05 33 16-0001)*		
26 05 33 16-0065	EA	16" Or 24" Width Box Bracket, For Multiple 1-1/2" And 2-1/8" Deep Boxes	18.13	8.48
26 05 33 16-0066	EA	Single Box Bracket, One 4" Or 4-11/16" Square Box	13.13	5.65
26 05 33 16-0067	EA	16" Box Bracket, Up To Three 4" Or 4-11/16" Square Boxes	20.95	8.48
26 05 33 16-0068	EA	24" Box Bracket, Up To Four 4" Or 4-11/16" Square Boxes	22.40	8.48

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 16-0069		**4" Octagon Steel Boxes And Covers** *(26 05 33 16-0001)*		
26 05 33 16-0070	EA	1-1/2" Depth, 4" Steel Octagon Box	30.31	14.10
		For Stud Bracket, Add	*1.53*	
26 05 33 16-0071	EA	2-1/8" Depth, 4" Steel Octagon Box	31.33	14.10
26 05 33 16-0072	EA	Flat, 4" Octagon Steel Exposed Work Cover	12.04	5.64
26 05 33 16-0073		**4" Steel Octagonal Concrete Rings And Steel Covers** *(26 05 33 16-0001)*		
		Note: Placed in concrete slabs or walls.		
26 05 33 16-0074	EA	2" Depth, 4" Steel Octagonal Concrete Ring	49.74	
26 05 33 16-0075	EA	2-1/2" Depth, 4" Steel Octagonal Concrete Ring	52.76	
26 05 33 16-0076	EA	3" Depth, 4" Steel Octagonal Concrete Ring	55.21	
26 05 33 16-0077	EA	3-1/2" Depth, 4" Steel Octagonal Concrete Ring	57.60	
26 05 33 16-0078	EA	4" Depth, 4" Steel Octagonal Concrete Ring	62.68	
26 05 33 16-0079	EA	5" Depth, 4" Steel Octagonal Concrete Ring	67.93	
26 05 33 16-0080	EA	6" Depth, 4" Steel Octagonal Concrete Ring	72.06	
26 05 33 16-0081	EA	Flat, 4" Steel Octagonal Concrete Cover	13.45	5.64
26 05 33 16-0082		**4-1/2" Steel Gang Boxes** *(26 05 33 16-0001)*		
26 05 33 16-0083	EA	2 Device, 1-5/8" Depth, 4-1/2" Steel Gang Box	44.79	14.10
26 05 33 16-0084	EA	3 Device, 1-5/8" Depth, 4-1/2" Steel Gang Box	49.16	15.23
26 05 33 16-0085	EA	4 Device, 1-5/8" Depth, 4-1/2" Steel Gang Box	58.88	16.92
26 05 33 16-0086	EA	5 Device, 1-5/8" Depth, 4-1/2" Steel Gang Box	76.27	18.61
26 05 33 16-0087	EA	6 Device, 1-5/8" Depth, 4-1/2" Steel Gang Box	111.88	20.31
26 05 33 16-0088	EA	2 Device, 2-1/2" Depth, 4-1/2" Steel Gang Box	60.59	14.10
26 05 33 16-0089	EA	3 Device, 2-1/2" Depth, 4-1/2" Steel Gang Box	65.99	15.23
26 05 33 16-0090	EA	4 Device, 2-1/2" Depth, 4-1/2" Steel Gang Box	87.30	16.92
26 05 33 16-0091	EA	5 Device, 2-1/2" Depth, 4-1/2" Steel Gang Box	111.61	18.61
26 05 33 16-0092	EA	6 Device, 2-1/2" Depth, 4-1/2" Steel Gang Box	181.77	20.31
26 05 33 16-0093	EA	2 Device, Gang Box Mud Ring	19.50	5.64
26 05 33 16-0094	EA	3 Device, Gang Box Mud Ring	19.76	5.64
26 05 33 16-0095	EA	4 Device, Gang Box Mud Ring	22.81	5.64
26 05 33 16-0096	EA	5 Device, Gang Box Mud Ring	28.04	5.64
26 05 33 16-0097	EA	6 Device, Gang Box Mud Ring	39.52	5.64
26 05 33 16-0098	EA	2 Device, Gang Box Flat Cover	16.88	5.64
26 05 33 16-0099	EA	3 Device, Gang Box Flat Cover	19.73	5.64
26 05 33 16-0100	EA	4 Device, Gang Box Flat Cover	23.51	5.64
26 05 33 16-0101	EA	5 Device, Gang Box Flat Cover	28.33	5.64
26 05 33 16-0102	EA	6 Device, Gang Box Flat Cover	40.33	5.64
26 05 33 16-0103		**Steel Switch Boxes** *(26 05 33 16-0001)*		
26 05 33 16-0104	EA	2-1/2" Depth, 3" x 2", Stud Bracket, Steel Switch Box	32.28	14.10
26 05 33 16-0105	EA	2-3/4" Depth, 3" x 2", Stud Bracket, Steel Switch Box	32.72	14.10
26 05 33 16-0106	EA	3-1/2" Depth, 3" x 2", Stud Bracket, Steel Switch Box	35.00	14.10
26 05 33 16-0107	EA	2-1/2" Depth, 2 Device, Stud Bracket, Steel Box	40.12	14.10
26 05 33 16-0108	EA	2-1/2" Depth, 3 Device, Stud Bracket, Steel Box	40.57	14.10
26 05 33 16-0109	EA	2-1/2" Depth, 4 Device, Stud Bracket, Steel Box	47.51	14.10
26 05 33 16-0110		**4" x 2" Steel Handy Boxes, Extension Rings And Covers** *(26 05 33 16-0001)*		
26 05 33 16-0111	EA	1-1/2" Deep, 4" x 2" Steel Handy Box	30.19	14.10
		For Stud Bracket, Add	*2.47*	
26 05 33 16-0112	EA	1-7/8" Deep, 4" x 2" Steel Handy Box	30.67	14.10
		For Stud Bracket, Add	*1.06*	
26 05 33 16-0113	EA	2-1/8" Deep, 4" x 2" Steel Handy Box	31.72	14.10
		For Stud Bracket, Add	*1.45*	
26 05 33 16-0114	EA	1-1/2" Deep, 4" x 2" Steel Handy Box Extension Ring	19.79	8.46
26 05 33 16-0115	EA	1-7/8" Deep, 4" x 2" Steel Handy Box Extension Ring	19.31	8.46
26 05 33 16-0116	EA	GFI Receptacle, 2" x 4" Steel Handy Box Exposed Work Cover	6.67	2.82
26 05 33 16-0117	EA	1.406" Diameter Receptacle, 4" x 2" Steel Handy Box Exposed Work Cover	6.76	2.82
26 05 33 16-0118	EA	Duplex Receptacle, 4" x 2" Steel Handy Box Exposed Work Cover	6.32	2.82
26 05 33 16-0119	EA	Toggle Switch, 4" x 2" Steel Handy Box Exposed Work Cover	6.35	2.82
26 05 33 16-0120	EA	1.594" Diameter Receptacle, 4" x 2" Steel Handy Box Exposed Work Cover	7.25	2.82
26 05 33 16-0121	EA	Flat, 2" x 4" Steel Handy Box Exposed Work Cover	6.35	2.82
26 05 33 16-0122		**3-1/2" Depth, 3-3/4" Steel Masonry Boxes** *(26 05 33 16-0001)*		
26 05 33 16-0123	EA	1 Device, 3-1/2" Depth, 3-3/4" Steel Masonry Box	45.04	19.74
26 05 33 16-0124	EA	2 Device, 3-1/2" Depth, 3-3/4" Steel Masonry Box	50.12	20.87
26 05 33 16-0125	EA	3 Device, 3-1/2" Depth, 3-3/4" Steel Masonry Box	57.14	22.56
26 05 33 16-0126	EA	4 Device, 3-1/2" Depth, 3-3/4" Steel Masonry Box	64.90	24.82
26 05 33 16-0127		**Cast Boxes** *(26 05 33 16)*		
		Note: For flush or surface mount.		
26 05 33 16-0128		**Cast Iron Alloy Boxes** *(26 05 33 16-0127)*		
		See CSI section 26 27 26 00-0289 for box covers.		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 16-0129		**Shallow, Single Gang Cast Iron Alloy Boxes** *(26 05 33 16-0128)* Note: Up to 2" deep boxes.		
26 05 33 16-0130	EA	1/2" Depth, Type FS, Shallow, Single Gang Cast Iron Alloy Box Note: One hub.	108.96	33.84
26 05 33 16-0131	EA	3/4" Depth, Type FS, Shallow, Single Gang Cast Iron Alloy Box Note: One hub.	114.84	39.48
26 05 33 16-0132	EA	1" Depth, Type FS, Shallow, Single Gang Cast Iron Alloy Box Note: One hub.	134.02	47.94
26 05 33 16-0133	EA	1/2" Depth, Type FSC, Shallow, Single Gang Cast Iron Alloy Box Note: Two hub.	133.81	45.12
26 05 33 16-0134	EA	3/4" Depth, Type FSC, Shallow, Single Gang Cast Iron Alloy Box Note: Two hub.	174.49	53.58
26 05 33 16-0135	EA	1/2" Depth, Type FSL, Shallow, Single Gang Cast Iron Alloy Box Note: Two hub.	133.11	45.12
26 05 33 16-0136	EA	3/4" Depth, Type FSL, Shallow, Single Gang Cast Iron Alloy Box Note: Two hubs.	160.63	53.58
26 05 33 16-0137	EA	1/2" Depth, Type FSR, Shallow, Single Gang Cast Iron Alloy Box Note: Two hubs.	137.57	45.12
26 05 33 16-0138	EA	3/4" Depth, Type FSR, Shallow, Single Gang Cast Iron Alloy Box Note: Two hubs.	160.70	53.58
26 05 33 16-0139	EA	1/2" Depth, Type FSS, Shallow, Single Gang Cast Iron Alloy Box Note: Two hubs.	133.11	45.12
26 05 33 16-0140	EA	3/4" Depth, Type FSS, Shallow, Single Gang Cast Iron Alloy Box Note: Two hubs.	155.19	53.58
26 05 33 16-0141	EA	1/2" Depth, Type FSCA, Shallow, Single Gang Cast Iron Alloy Box Note: Three hubs.	156.40	56.40
26 05 33 16-0142	EA	3/4" Depth, Type FSCA, Shallow, Single Gang Cast Iron Alloy Box Note: Three hubs.	184.31	67.68
26 05 33 16-0143	EA	1/2" Depth, Type FSCC, Shallow, Single Gang Cast Iron Alloy Box Note: Three hubs.	164.94	56.40
26 05 33 16-0144	EA	3/4" Depth, Type FSCC, Shallow, Single Gang Cast Iron Alloy Box Note: Three hubs.	216.90	67.68
26 05 33 16-0145	EA	1/2" Depth, Type FSCT, Shallow, Single Gang Cast Iron Alloy Box Note: Three hubs.	170.52	56.40
26 05 33 16-0146	EA	3/4" Depth, Type FSCT, Shallow, Single Gang Cast Iron Alloy Box Note: Three hubs.	203.50	67.68
26 05 33 16-0147	EA	1/2" Depth, Type FST, Shallow, Single Gang Cast Iron Alloy Box Note: Three hubs.	155.67	56.40
26 05 33 16-0148	EA	3/4" Depth, Type FST, Shallow, Single Gang Cast Iron Alloy Box Note: Three hubs.	207.28	67.68
26 05 33 16-0149	EA	1/2" Depth, Type FSX, Shallow, Single Gang Cast Iron Alloy Box Note: Four hubs.	201.96	67.68
26 05 33 16-0150	EA	3/4" Depth, Type FSX, Shallow, Single Gang Cast Iron Alloy Box Note: Four hubs.	243.54	81.78
26 05 33 16-0151		**Deep, Single Gang Cast Iron Alloy Boxes** *(26 05 33 16-0128)* Note: >2" deep boxes.		
26 05 33 16-0152	EA	1/2" Depth, Type FD, Deep, Single Gang Cast Iron Alloy Box Note: One hub.	115.26	33.84
26 05 33 16-0153	EA	3/4" Depth, Type FD, Deep, Single Gang Cast Iron Alloy Box Note: One hub.	132.31	39.48
26 05 33 16-0154	EA	1" Depth, Type FD, Deep, Single Gang Cast Iron Alloy Box Note: One hub.	154.17	47.94
26 05 33 16-0155	EA	1/2" Depth, Type FDC, Deep, Single Gang Cast Iron Alloy Box Note: Two hubs.	145.32	45.12
26 05 33 16-0156	EA	3/4" Depth, Type FDC, Deep, Single Gang Cast Iron Alloy Box Note: Two hubs.	166.55	53.58
26 05 33 16-0157	EA	1" Depth, Type FDC, Deep, Single Gang Cast Iron Alloy Box Note: Two hubs.	199.80	64.86
26 05 33 16-0158	EA	3/4" Depth, Type FDS, Deep, Single Gang Cast Iron Alloy Box Note: Two hubs.	182.24	53.58
26 05 33 16-0159	EA	3/4" Depth, Type FDCC, Deep, Single Gang Cast Iron Alloy Box Note: Three hubs.	235.49	67.68
26 05 33 16-0160		**Shallow, Two Gang Cast Iron Alloy Boxes** *(26 05 33 16-0128)* Note: Up to 2" deep boxes.		
26 05 33 16-0161	EA	1/2" Depth, Type FS, Shallow, Two Gang Cast Iron Alloy Box Note: One hub.	134.40	36.66
26 05 33 16-0162	EA	3/4" Depth, Type FS, Shallow, Two Gang Cast Iron Alloy Box Note: One hub.	147.53	42.30
26 05 33 16-0163	EA	1" Depth, Type FS, Shallow, Two Gang Cast Iron Alloy Box Note: One hub.	170.06	50.76
26 05 33 16-0164	EA	1/2" Depth, Type FSC, Shallow, Two Gang Cast Iron Alloy Box Note: Two hubs.	159.98	47.94
26 05 33 16-0165	EA	3/4" Depth, Type FSC, Shallow, Two Gang Cast Iron Alloy Box Note: Two hubs.	180.13	56.40
26 05 33 16-0166		**Deep, Two Gang Cast Iron Alloy Boxes** *(26 05 33 16-0128)* Note: >2" deep boxes.		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 16-0167	EA	1/2" Depth, Type FD, Deep, Two Gang Cast Iron Alloy Box Note: One hub.	153.30	36.66
26 05 33 16-0168	EA	3/4" Depth, Type FD, Deep, Two Gang Cast Iron Alloy Box Note: One hub.	165.31	42.30
26 05 33 16-0169	EA	1/2" Depth, Type FDC, Deep, Two Gang Cast Iron Alloy Box Note: Two hubs.	188.43	47.94
26 05 33 16-0170	EA	3/4" Depth, Type FDC, Deep, Two Gang Cast Iron Alloy Box Note: Two hubs.	210.18	56.40
26 05 33 16-0171		Cast Aluminum Boxes *(26 05 33 16-0127)* See CSI section 26 27 26 00-0289 for box covers.		
26 05 33 16-0172		Shallow, Single Gang Cast Aluminum Boxes *(26 05 33 16-0171)* Note: Up to 2" deep boxes.		
26 05 33 16-0173	EA	1/2" Depth, Type FS, Shallow, Single Gang Cast Aluminum Box Note: One hub.	97.68	28.20
26 05 33 16-0174	EA	3/4" Depth, Type FS, Shallow, Single Gang Cast Aluminum Box Note: One hub.	110.61	33.84
26 05 33 16-0175	EA	1" Depth, Type FS, Shallow, Single Gang Cast Aluminum Box Note: One hub.	119.11	42.30
26 05 33 16-0176	EA	1/2" Depth, Type FSA, Shallow, Single Gang Cast Aluminum Box Note: One hub.	90.35	28.20
26 05 33 16-0177	EA	3/4" Depth, Type FSA, Shallow, Single Gang Cast Aluminum Box Note: One hub.	115.78	33.84
26 05 33 16-0178	EA	1/2" Depth, Type FSC, Shallow, Single Gang Cast Aluminum Box Note: Two hubs.	120.95	39.48
26 05 33 16-0179	EA	3/4" Depth, Type FSC, Shallow, Single Gang Cast Aluminum Box Note: Two hubs.	144.89	47.94
26 05 33 16-0180	EA	1" Depth, Type FSC, Shallow, Single Gang Cast Aluminum Box Note: Two hubs.	182.58	59.22
26 05 33 16-0181	EA	1/2" Depth, Type FSL, Shallow, Single Gang Cast Aluminum Box Note: Two hubs.	133.70	39.48
26 05 33 16-0182	EA	3/4" Depth, Type FSL, Shallow, Single Gang Cast Aluminum Box Note: Two hubs.	138.68	47.94
26 05 33 16-0183	EA	1/2" Depth, Type FSLB, Shallow, Single Gang Cast Aluminum Box Note: Two hubs.	126.45	39.48
26 05 33 16-0184	EA	3/4" Depth, Type FSLB, Shallow, Single Gang Cast Aluminum Box Note: Two hubs.	143.02	47.94
26 05 33 16-0185	EA	1/2" Depth, Type FSR, Shallow, Single Gang Cast Aluminum Box Note: Two hubs.	121.76	39.48
26 05 33 16-0186	EA	3/4" Depth, Type FSR, Shallow, Single Gang Cast Aluminum Box Note: Two hubs.	143.02	47.94
26 05 33 16-0187	EA	1/2" Depth, Type FSS, Shallow, Single Gang Cast Aluminum Box Note: Two hubs.	110.95	39.48
26 05 33 16-0188	EA	3/4" Depth, Type FSS, Shallow, Single Gang Cast Aluminum Box Note: Two hubs.	154.52	47.94
26 05 33 16-0189	EA	1/2" Depth, Type FSCA, Shallow, Single Gang Cast Aluminum Box Note: Three hubs.	140.97	50.76
26 05 33 16-0190	EA	3/4" Depth, Type FSCA, Shallow, Single Gang Cast Aluminum Box Note: Three hubs.	171.00	62.04
26 05 33 16-0191	EA	1/2" Depth, Type FSCC, Shallow, Single Gang Cast Aluminum Box Note: Three hubs.	152.18	50.76
26 05 33 16-0192	EA	3/4" Depth, Type FSCC, Shallow, Single Gang Cast Aluminum Box Note: Three hubs.	209.84	62.04
26 05 33 16-0193	EA	1/2" Depth, Type FSCT, Shallow, Single Gang Cast Aluminum Box Note: Three hubs.	151.24	50.76
26 05 33 16-0194	EA	3/4" Depth, Type FSCT, Shallow, Single Gang Cast Aluminum Box Note: Three hubs.	185.77	62.04
26 05 33 16-0195	EA	3/4" Depth, Type FST, Shallow, Single Gang Cast Aluminum Box Note: Three hubs.	189.11	62.04
26 05 33 16-0196	EA	1/2" Depth, Type FSX, Shallow, Single Gang Cast Aluminum Box Note: Four hubs.	184.31	62.04
26 05 33 16-0197	EA	3/4" Depth, Type FSX, Shallow, Single Gang Cast Aluminum Box Note: Four hubs.	224.63	76.14
26 05 33 16-0198		Deep, Single Gang Cast Aluminum Boxes *(26 05 33 16-0171)* Note: >2" deep boxes.		
26 05 33 16-0199	EA	1/2" Depth, Type FD, Deep, Single Gang Cast Aluminum Box Note: One hub.	110.69	28.20
26 05 33 16-0200	EA	3/4" Depth, Type FD, Deep, Single Gang Cast Aluminum Box Note: One hub.	132.55	33.84
26 05 33 16-0201	EA	1" Depth, Type FD, Deep, Single Gang Cast Aluminum Box Note: One hub.	149.28	42.30
26 05 33 16-0202	EA	3/4" Depth, Type FDA, Deep, Single Gang Cast Aluminum Box Note: One hub.	144.43	33.84
26 05 33 16-0203	EA	1/2" Depth, Type FDC, Deep, Single Gang Cast Aluminum Box Note: Two hubs.	137.77	39.48
26 05 33 16-0204	EA	3/4" Depth, Type FDC, Deep, Single Gang Cast Aluminum Box Note: Two hubs.	165.54	47.94
26 05 33 16-0205	EA	1" Depth, Type FDC, Deep, Single Gang Cast Aluminum Box Note: Two hubs.	180.64	59.22
26 05 33 16-0206	EA	3/4" Depth, Type FDS, Deep, Single Gang Cast Aluminum Box Note: Two hubs.	168.30	47.94

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 16-0207	EA	3/4" Depth, Type FDCC, Deep, Single Gang Cast Aluminum Box Note: Three hubs.	203.11	62.04
26 05 33 16-0208		**Shallow, Two Gang Cast Aluminum Boxes** *(26 05 33 16-0171)* Note: Up to 2" deep boxes.		
26 05 33 16-0209	EA	1/2" Depth, Type FS, Shallow, Two Gang Cast Aluminum Box Note: One hub.	134.54	31.02
26 05 33 16-0210	EA	3/4" Depth, Type FS, Shallow, Two Gang Cast Aluminum Box Note: One hub.	153.15	36.66
26 05 33 16-0211	EA	1" Depth, Type FS, Shallow, Two Gang Cast Aluminum Box Note: One hub.	159.82	45.12
26 05 33 16-0212	EA	1/2" Depth, Type FSC, Shallow, Two Gang Cast Aluminum Box Note: Two hubs.	165.31	42.30
26 05 33 16-0213	EA	3/4" Depth, Type FSC, Shallow, Two Gang Cast Aluminum Box Note: Two hubs.	162.45	50.76
26 05 33 16-0214	EA	1" Depth, Type FSC, Shallow, Two Gang Cast Aluminum Box Note: Two hubs.	201.22	62.04
26 05 33 16-0215		**Deep, Two Gang Cast Aluminum Boxes** *(26 05 33 16-0171)* Note: >2" deep boxes.		
26 05 33 16-0216	EA	1/2" Depth, Type FD, Deep, Two Gang Cast Aluminum Box Note: One hub.	134.39	31.02
26 05 33 16-0217	EA	3/4" Depth, Type FD, Deep, Two Gang Cast Aluminum Box Note: One hub.	154.93	36.66
26 05 33 16-0218	EA	1/2" Depth, Type FDC, Deep, Two Gang Cast Aluminum Box Note: Two hubs.	169.37	42.30
26 05 33 16-0219	EA	3/4" Depth, Type FDC, Deep, Two Gang Cast Aluminum Box Note: Two hubs.	189.65	50.76
26 05 33 16-0220	EA	1/2" Depth, Type FDC, Deep, Two Gang Cast Aluminum Box Note: Two hubs.	169.37	42.30
26 05 33 16-0221	EA	3/4" Depth, Type FDC, Deep, Two Gang Cast Aluminum Box Note: Two hubs.	189.65	50.76
26 05 33 16-0222		**Shallow, Three Gang Cast Aluminum Boxes** *(26 05 33 16-0171)* Note: Up to 2" deep boxes.		
26 05 33 16-0223	EA	1/2" Depth, Type FSC, Shallow, Three Gang Cast Aluminum Box Note: Two hubs.	177.18	45.12
26 05 33 16-0224	EA	3/4" Depth, Type FSC, Shallow, Three Gang Cast Aluminum Box Note: Two hubs.	196.41	53.58
26 05 33 16-0225		**Deep, Three Gang Cast Aluminum Boxes** *(26 05 33 16-0171)* Note: >2" deep boxes.		
26 05 33 16-0226	EA	3/4" Depth, Type FD, Deep, Three Gang Cast Aluminum Box Note: One hub.	211.66	39.48
26 05 33 16-0227	EA	1" Depth, Type FD, Deep, Three Gang Cast Aluminum Box Note: One hub.	232.75	47.94
26 05 33 16-0228		**Cast Aluminum Explosion Proof Outlet Bodies** *(26 05 33 16-0127)* Note: Class I, Div. 1 & 2; Class II, Div. 1 & 2; and Class III.		
26 05 33 16-0229	EA	1/2" Depth, Type GRSS, 7 Opening, Cast Aluminum Explosion Proof Outlet Body	215.57	45.12
26 05 33 16-0230	EA	3/4" Depth, Type GRSS, 7 Opening, Cast Aluminum Explosion Proof Outlet Body	271.42	50.76
26 05 33 16-0231	EA	1" Depth, Type GRSS, 7 Opening, Cast Aluminum Explosion Proof Outlet Body	240.08	56.40
26 05 33 16-0232	EA	1/2" Depth, Type GRSSA, 13 Opening, Cast Aluminum Explosion Proof Outlet Body	238.27	50.76
26 05 33 16-0233	EA	3/4" Depth, 13 Hubs, Explosion Proof Conduit Outlet Box With Cover Cast Aluminum, Type GRSSA	295.02	56.40
26 05 33 16-0234		**Non-Metallic (PVC) Boxes** *(26 05 33 16)* See CSI section 26 27 26 00-0289 for box covers.		
26 05 33 16-0235		**Shallow, Single Gang Non-Metallic (PVC) Boxes** *(26 05 33 16-0234)*		
26 05 33 16-0236	EA	1/2" Depth, Type FSE, Shallow, Single Gang Non-Metallic (PVC) Box Note: One hub.	58.91	23.69
26 05 33 16-0237	EA	3/4" Depth, Type FSE, Shallow, Single Gang Non-Metallic (PVC) Box Note: One hub.	67.17	27.64
26 05 33 16-0238	EA	1" Depth, Type FSE, Shallow, Single Gang Non-Metallic (PVC) Box Note: One hub.	75.99	33.56
26 05 33 16-0239	EA	1/2" Depth, Type FSC, Shallow, Single Gang Non-Metallic (PVC) Box Note: Two hubs.	75.07	31.59
26 05 33 16-0240	EA	3/4" Depth, Type FSC, Shallow, Single Gang Non-Metallic (PVC) Box Note: Two hubs.	88.09	37.51
26 05 33 16-0241	EA	1" Depth, Type FSC, Shallow, Single Gang Non-Metallic (PVC) Box Note: Two hubs.	106.88	45.40
26 05 33 16-0242	EA	1/2" Depth, Type FSS, Shallow, Single Gang Non-Metallic (PVC) Box Note: Two hubs.	75.37	31.59
26 05 33 16-0243	EA	3/4" Depth, Type FSS, Shallow, Single Gang Non-Metallic (PVC) Box Note: Two hubs.	87.28	37.51
26 05 33 16-0244	EA	1" Depth, Type FSS, Shallow, Single Gang Non-Metallic (PVC) Box Note: Two hubs.	104.09	45.40

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 16-0245	EA	1/2" Depth, Type FSCC, Shallow, Single Gang Non-Metallic (PVC) Box Note: Three hubs.	95.29	39.48
26 05 33 16-0246	EA	3/4" Depth, Type FSCC, Shallow, Single Gang Non-Metallic (PVC) Box Note: Three hubs.	107.86	47.37
26 05 33 16-0247	EA	1" Depth, Type FSCC, Shallow, Single Gang Non-Metallic (PVC) Box Note: Three hubs.	126.63	57.25
26 05 33 16-0248		**Deep, Single Gang Non-Metallic (PVC) Boxes** *(26 05 33 16-0234)*		
26 05 33 16-0249	EA	No Hub, Type FD, Deep, Single Gang Non-Metallic (PVC) Box Note: No hubs.	59.81	23.69
26 05 33 16-0250	EA	1/2" Depth, Type FDE, Deep, Single Gang Non-Metallic (PVC) Box Note: One hub.	58.23	23.69
26 05 33 16-0251	EA	3/4" Depth, Type FDE, Deep, Single Gang Non-Metallic (PVC) Box Note: One hub.	69.31	27.64
26 05 33 16-0252	EA	1" Depth, Type FDE, Deep, Single Gang Non-Metallic (PVC) Box Note: One hub.	76.86	33.56
26 05 33 16-0253	EA	1/2" Depth, Type FDC, Deep, Single Gang Non-Metallic (PVC) Box Note: Two hubs.	76.84	31.59
26 05 33 16-0254	EA	3/4" Depth, Type FDC, Deep, Single Gang Non-Metallic (PVC) Box Note: Two hubs.	85.78	37.51
26 05 33 16-0255	EA	1" Depth, Type FDC, Deep, Single Gang Non-Metallic (PVC) Box Note: Two hubs.	102.37	45.40
26 05 33 16-0256		**Shallow, Two Gang Non-Metallic (PVC) Boxes** *(26 05 33 16-0234)*		
26 05 33 16-0257	EA	1/2" Depth, Type FSE, Shallow, Two Gang Non-Metallic (PVC) Box Note: One hub.	63.33	25.66
26 05 33 16-0258	EA	3/4" Depth, Type FSE, Shallow, Two Gang Non-Metallic (PVC) Box Note: One hub.	72.49	29.61
26 05 33 16-0259	EA	1" Depth, Type FSE, Shallow, Two Gang Non-Metallic (PVC) Box Note: One hub.	80.10	35.53
26 05 33 16-0260	EA	1/2" Depth, Type FSC, Shallow, Two Gang Non-Metallic (PVC) Box Note: Two hubs.	77.06	33.56
26 05 33 16-0261	EA	3/4" Depth, Type FSC, Shallow, Two Gang Non-Metallic (PVC) Box Note: Two hubs.	95.88	39.48
26 05 33 16-0262	EA	1" Depth, Type FSC, Shallow, Two Gang Non-Metallic (PVC) Box Note: Two hubs.	113.26	47.37
26 05 33 16-0263	EA	1/2" Depth, Type FSS, Shallow, Two Gang Non-Metallic (PVC) Box Note: Two hubs.	79.15	33.56
26 05 33 16-0264	EA	3/4" Depth, Type FSS, Shallow, Two Gang Non-Metallic (PVC) Box Note: Two hubs.	101.67	39.48
26 05 33 16-0265	EA	1" Depth, Type FSS, Shallow, Two Gang Non-Metallic (PVC) Box Note: Two hubs.	108.62	47.37
26 05 33 16-0266	EA	1/2" Depth, Type FSCC, Shallow, Two Gang Non-Metallic (PVC) Box Note: Three hubs.	96.64	41.46
26 05 33 16-0267	EA	3/4" Depth, Type FSCC, Shallow, Two Gang Non-Metallic (PVC) Box Note: Three hubs.	128.70	49.35
26 05 33 16-0268	EA	1" Depth, Type FSCC, Shallow, Two Gang Non-Metallic (PVC) Box Note: Three hubs.	130.44	59.22
26 05 33 16-0269		**Poke Thru Units** *(26 05 33 16)*		
26 05 33 16-0270		**Surface Poke Thru Units** *(26 05 33 16-0269)* Note: Excludes concrete drilling. See CSI section 27 11 19 00-0124 for jacks.		
26 05 33 16-0271	EA	Single 20 Amperes, Duplex Receptacle RC3 Power And Communications Poke Thru Unit Note: Tile or carpet with brushed aluminum flange with black non-metallic cover. Excludes communication jacks. Wiremold RC3ATCAL.	552.30	42.30
26 05 33 16-0272	EA	Retrofit Kit Upgrades Existing RC3 Series Power And Communications Poke Thru Unit To Meet Scrub Water Requirements Note: Includes 20 Amp duplex receptacle. Tile or carpet with brushed aluminum flange with black non-metallic cover. Wiremold RC3KTCAL.	352.49	
26 05 33 16-0273	EA	20 Amperes, Replacement Duplex Receptacle For RC3 Series Power And Communications Poke Thru Unit Note: Wiremold RC37REC.	47.06	11.28
26 05 33 16-0274	EA	Abandonment Plate For RC3 Series Power And Communications Poke Thru Unit Note: Wiremold RC3APTCBK.	58.90	5.64
26 05 33 16-0275	EA	Four 20 Amperes, Receptacles RC4 Power And Communications Poke Thru Unit Note: Tile or carpet with brushed aluminum flange with black non-metallic cover. Excludes communication jacks. Wiremold RC4ATCAL.	625.34	45.12
26 05 33 16-0276	EA	Retrofit Kit Upgrades Existing RC4 Series Power And Communications Poke Thru Unit To Meet Scrub Water Requirements Note: Includes two 20 Amp duplex receptacles. Tile or carpet with brushed aluminum flange with black non-metallic cover. Excludes communication jacks. Wiremold RC4KTCAL.	329.58	
26 05 33 16-0277	EA	Two 20 Amperes, Replacement Duplex Receptacles For RC4 Series Power And Communications Poke Thru Unit Note: Wiremold RC4REC2.	81.28	16.92
26 05 33 16-0278	EA	Abandonment Plate For RC4 Series Power And Communications Poke Thru Unit Note: Wiremold RC4APTCBK.	58.90	5.64
26 05 33 16-0279	EA	Abandonment Plug For RC4 Series Power And Communications Poke Thru Unit Note: Wiremold ABPLUG4.	172.95	11.28
26 05 33 16-0280	EA	Four Jack RC9AMD Communications Poke Thru Unit Note: Tile or carpet with brushed aluminum flange with black non-metallic cover. Includes bezels to accept four Ortronics TracJack inserts and two Ortronics Series II inserts. Excludes communication jacks. Wiremold RC9AMDTCAL.	493.87	39.48

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 16-0281	EA	Abandonment Plate For RC9 Series Communications Poke Thru Unit Note: Wiremold RC9APTCBK.	40.49	5.64
26 05 33 16-0282	EA	Eight Jack AMD8 Communications Poke Thru Unit Note: Tile or carpet with brushed aluminum flange with black non-metallic cover. Includes bezels to accept eight Ortronics TracJack inserts and four Ortronics Series II inserts. Excludes communication jacks. Wiremold AMD8ATCAL.	491.55	39.48
26 05 33 16-0283	EA	Communication Conduit Adapter For Poke Thru Units Note: Includes two conduit connections for communication systems. Wiremold COM75.	56.88	5.64
26 05 33 16-0284		**Recessed Poke Thru Units** *(26 05 33 16-0269)* Note: Excludes concrete drilling.		
26 05 33 16-0285		**Evolution 6AT Poke Thru Units** *(26 05 33 16-0284)* Note: Excludes concrete drilling.		
26 05 33 16-0286	EA	Recessed Prewired Assembly With Surface Style Cover (Wiremold 6ATCP) Note: For carpet, tile, wood and laminate floors. For use in 6" diameter cored hole. Devices are recessed 3 1/4" below floor surface. Die-cast aluminum cover assembly is available in the following finishes: (BK) painted black, (GY) painted gray, (NK) nickel, (BS) brass, and (BZ) bronze.	966.07	45.12
26 05 33 16-0287	EA	Recessed Prewired Assembly With Flush Style Cover (Wiremold 6ATP) Note: For tile, wood and laminate floors. For use in 6" diameter cored hole. Devices are recessed 3 1/4" below floor surface. Die-cast aluminum cover assembly is available in the following finishes: (BK) painted black, (GY) painted gray, (NK) nickel, (BS) brass, and (BZ) bronze.	966.19	45.12
26 05 33 16-0288	EA	Recessed Assembly With Surface Style Cover (Wiremold 6ATC) Note: For carpet, tile, wood and laminate floors. For use in 6" diameter cored hole. Devices are recessed 3 1/4" below floor surface. Diecast aluminum cover is available in the following finishes: (BK) painted black, (GY) painted gray, (NK) nickel, (BS) brass, and (BZ) bronze.	919.87	45.12
26 05 33 16-0289	EA	Recessed Assembly With Flush Style Cover (Wiremold 6AT) Note: For tile, wood or laminate floors. For use in 6" diameter cored hole. Devices are recessed 3 1/4" below floor surface. Die-cast aluminum cover is available in the following finishes: (BK) painted black, (GY) painted gray, (NK) nickel, (BS) brass, and (BZ) bronze.	919.87	45.12
26 05 33 16-0290	EA	Recessed Prewired Audio/Video Assembly With Surface Style Cover (Wiremold 6ATCPA) Note: For carpet, tile, wood and laminate floors. For use in 6" diameter cored hole. Devices are recessed 3 1/4" below floor surface. Die-cast aluminum cover assembly is available in the following finishes: (BK) painted black, (GY) painted gray, (NK) nickel, (BS) brass, and (BZ) bronze.	966.07	45.12
26 05 33 16-0291	EA	Recessed Prewired Audio/Video Assembly With Flush Style Cover (Wiremold 6ATPA) Note: For tile, wood and laminate floors. For use in 6" diameter cored hole. Devices are recessed 3 1/4" below floor surface. Die-cast aluminum cover assembly is available in the following finishes: (BK) painted black, (GY) painted gray, (NK) nickel, (BS) brass, and (BZ) bronze.	966.07	45.12
26 05 33 16-0292	EA	Recessed Furniture Feed Assembly With Surface Style Cover (Wiremold 6ATCFF) Note: For carpet, tile, wood and laminate floors. For use in 6" diameter cored hole. Die-cast aluminum cover assembly provides one (1) 3/4" trade size screw plug opening and one (1) concentric 2" to 1 1/4" trade size screw plug opening and is available in the following finishes: (BK) painted black, (GY) painted gray, (NK) nickel, (BS) brass, and (BZ) bronze.	880.76	45.12
26 05 33 16-0293	EA	Recessed Assembly With Disposable Plate (Wiremold 6STC) Note: Includes 6" core hole poke-thru stem assembly with a disposable plate. Devices are recessed 3 1/4" below floor surface. No cover assembly is included. No device plates are included. For use with the following cover assemblies (purchased separately): 6CTC, 6CT, and 6CFFTC Series.	546.24	42.30
26 05 33 16-0294	EA	Recessed Prewired Audio/Video Assembly With Disposable Plate (Wiremold 6STCPAV) Note: Includes 6" core hole poke-thru stem assembly with a disposable plate. Devices are recessed 3 1/4" below floor surface. No cover assembly is included. For use with the following cover assemblies(purchased separately): 6CTC and 6CT Series.	587.10	42.30
26 05 33 16-0295	EA	Recessed Prewired Assembly With Disposable Plate (Wiremold 6STCP) Note: Includes 6" core hole poke-thru stem assembly with a disposable plate. Devices are recessed 3 1/4" below floor surface. No cover assembly is included. For use with the following cover assemblies (purchased separately): 6CTC and 6CT Series.	591.15	42.30
26 05 33 16-0296	EA	6" Pre-Pour Poke-Thru Sleeve (Wiremold 6PPS) Note: Non-metallic sleeve attaches to structural decking and maintains 6" to 6-1/8" diameter cast in core hole. Unit includes three (3) attachment legs, two (2) end caps and three (3) thumb screws.	163.07	22.56
26 05 33 16-0297	EA	Surface Style Cover Assembly (Wiremold 6CTC) Note: Die-cast aluminum cover assembly. Cover assembly is available in the following finishes: black (BK), gray (GY), nickel (NK), brass (BS), and bronze (BZ). 6CTC Series cover assemblies designed for use with 6STC, 6STCP, and 6STCPAV Poke-Thru Stem Assemblies.	392.31	11.28
26 05 33 16-0298	EA	Flush Style Cover Assembly (Wiremold 6CT) Note: Die-cast aluminum cover assembly. Cover assembly is available in the following finishes: black (BK), gray (GY), nickel (NK), brass (BS), and bronze (BZ). 6CT Series cover assemblies designed for use with 6STC, 6STCP and 6STCPAV Poke-Thru Stem Assemblies. Includes one (1) 6TS Tile Shim.	392.31	11.28
26 05 33 16-0299	EA	Furniture Feed Cover Assembly (Wiremold 6CFFTC) Note: Surface style, die-cast aluminum cover assembly, with one (1) 3/4" trade size screw plug opening, and one (1) concentric 2" to 1-1/4" trade size screw plug opening. Cover assembly is available in finishes: black (BK), gray(GY), nickel (NK), brass (BS), and bronze (BZ). 6CFFTC Series Cover Assemblies designed for use with 6STC Poke- Thru Stem Assembly. Includes one (1) 3/4" and one (1) 2" trade size conduit fittings and one (1) divider to separate services.	325.30	11.28
26 05 33 16-0300	EA	Tile Shim (Wiremold 6TS) Note: Used for floor coverings greater than 5/16" The 6TS will allow the top surface of the cover to be flush with the finished floor. Includes: two (2) 1/8" thick shims and two (2) 1/16" thick shims. Up to a total of 3/8" of adjustment.	46.55	2.82
26 05 33 16-0301	EA	Device Mounting Plate (Wiremold 6AAP) Note: Device plate that will accept up to two (2) Extron® Electronics AAP style plates. For use in the center compartment only. Devices supplied by others.	21.00	5.64
26 05 33 16-0302	EA	Device Mounting Plate (Wiremold 6ACT8A) Note: Device plate that will accept up to eight (8) ports of communication devices. For use in the center compartment only. Devices supplied by others.	24.63	5.64
26 05 33 16-0303	EA	Device Mounting Plate (Wiremold 6B) Note: Device plate used to blank off center compartment, when no devices are used.	20.89	5.64

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 16-0304	EA	Device Mounting Plate (Wiremold 6DEC) Note: Device plate that will accept Decorator style devices such as 20 amperes receptacles, GFCIs, 106 adapters or A/V devices. For use in the center compartment only. Devices supplied by others.	20.96	5.64
26 05 33 16-0305	EA	Device Mounting Plate (Wiremold 6DP) Note: Device plate that will accept standard 20 amperes duplex receptacle or duplex Turnlok receptacle. For use in the center compartment only. Devices supplied by others.	20.80	5.64
26 05 33 16-0306	EA	Device Mounting Plate (Wiremold 6MAAP) Note: Device plate that will accept up to six (6) Extron® Electronics MAAP style plates. For use in the center compartment only. Devices supplied by others.	25.01	5.64
26 05 33 16-0307	EA	Device Mounting Plate (Wiremold 6MAAP2A) Note: Combination device plate that will accept up to three (3) Extron® Electronics MAAP style plates, and up to two (2) ports of communication devices. For use in the center compartment only. Devices supplied by others.	24.72	5.64
26 05 33 16-0308	EA	Mosaic Mounting Plate (Wiremold 6MOS) Note: Device plate will accept two (2) standard [45mm x 45mm] or one (1) standard [45mm x 90mm] Mosaic style device(s). Devices supplied by others.	25.38	5.64
26 05 33 16-0309	EA	Device Mounting Plate (Wiremold 6S1) Note: Receptacle opening 1 3/8". For 6" poke-thru units only.	20.46	5.64
26 05 33 16-0310	EA	Device Mounting Plate (Wiremold 6S2) Note: Receptacle opening 1 9/16". For 6" poke-thru units only.	20.47	5.64
26 05 33 16-0311	EA	Device Mounting Plate (Wiremold 6SER) Note: Device plate that will accept up to four (4) Ortronics® Series II dual modular inserts. For use in the center compartment only. Devices supplied by others.	20.16	5.64
26 05 33 16-0312	EA	Device Mounting Plate (Wiremold 6TRAC) Note: Device plate that will accept up to eight (8) Ortronics® TracJack devices. For use in the center compartment only. Devices supplied by others.	20.16	5.64
26 05 33 16-0313	EA	20 Amperes, Duplex Receptacles (Wiremold 68REC) Note: Two (2) proprietary 20 amperes duplex power receptacles with mounting plates. Designed to fit in either of the two side compartments in both the 6ATC and the 8ATC Series Poke-Thru Devices. Receptacle can be wired as a standard or isolated ground device.	50.76	8.46
26 05 33 16-0314	EA	Device Mounting Plate (Wiremold 68B) Note: Blank plate. Used to blank off either of the side compartments when no devices or cabling are to be used.	18.25	5.64
26 05 33 16-0315	EA	Device Mounting Plate (Wiremold 68MAAP) Note: Device plate that will accept up to two (2) Extron® Electronics MAAP device plates. For use in either of the two side compartments only. Not for use in the center compartment. Extron Devices supplied by others.	18.77	5.64
26 05 33 16-0316	EA	20 Amperes, Duplex Receptacles (Wiremold 68REC-25) Note: Two (2) proprietary 20 amperes duplex power receptacles with mounting plates and 25' leads. Designed to fit in either of the two side compartments in both the 6ATC and the 8ATC Series Poke-Thru Devices. Receptacle can be wired as a standard or isolated	166.69	10.15
26 05 33 16-0317	EA	Device Mounting Plate (Wiremold 682A) Note: Device plate that will accept up to two (2) ports of communication devices. For use in either of the two side compartments only. Not for use in the center compartment. Communication devices supplied by others.	24.39	5.64
26 05 33 16-0318	EA	Bottom Housing Assembly (Wiremold 5PTHA) Note: Half-gang pass through housing assembly. Designed to allow pass through of communication cables when no conduit is required. For use on side compartments only.	25.52	5.64
26 05 33 16-0319	EA	Bottom Housing Assembly (Wiremold 5BLH) Note: Half-gang blank housing assembly. Designed to blank off compartment when no cable pass through is required. For use on side compartments only. Includes tunnels for 6" and 8" poke-thru devices.	26.31	5.64
26 05 33 16-0320	EA	Bottom Housing Assembly (Wiremold 152CHA) Note: One and a half-gang 2" trade size conduit housing assembly. Recommended for use with furniture feed devices (6ATCFF). Covers the center compartment and one of the side compartments.	39.30	11.28
26 05 33 16-0321	EA	Bottom Housing Assembly (Wiremold 575CHA) Note: Half-gang 3/4" trade size conduit housing assembly. Includes junction box attached to 3/4" trade size conduit for electrical power connections. For use on side compartments only.	44.52	14.10
26 05 33 16-0322	EA	Bottom Housing Assembly (Wiremold 175CHA) Note: One-gang 3/4" trade size conduit housing assembly. Includes junction box attached to 3/4" trade size conduit for electrical power connections.	49.72	14.10
26 05 33 16-0323	EA	Bottom Housing Assembly (Wiremold 1125CHA) Note: One-gang 1 1/4" trade size conduit housing assembly.	37.54	11.28
26 05 33 16-0324	EA	Bottom Housing Assembly (Wiremold 1PTHA) Note: One-gang pass through housing assembly. Designed to allow pass through of communication cables when no conduit is required.	25.32	5.64
26 05 33 16-0325	EA	Bottom Housing Assembly (Wiremold 1BLH) Note: One-gang blank housing assembly. Designed to blank off compartment when no cable pass through is required.	25.32	5.64
26 05 33 16-0326	EA	Bottom Housing Assembly (Wiremold 15FFHA) Note: One and a half-gang pass through conduit housing assembly. Used for furniture feed applications on the center compartment only. Only for use with 6AT Series units.	26.82	5.64
26 05 33 16-0327	EA	Bottom Housing Assembly (Wiremold 1BHA) Note: One-gang bottom housing assembly. Designed to accept 175CHA, 1125CHA, 1PTHA, and 1BLH plates.	27.83	5.64
26 05 33 16-0328		Evolution 8AT Poke Thru Units *(26 05 33 16-0284)* Note: Excludes concrete drilling.		
26 05 33 16-0329	EA	Recessed Prewired Assembly With Surface Style Cover (Wiremold 8ATCP) Note: For carpet, tile, wood and laminate floors. For use in 8" diameter cored hole. Devices are recessed 3 1/4" below floor surface. Die-cast aluminum cover assembly is available in the following finishes: (BK) painted black, (GY) painted gray, (NK) nickel, (BS) brass, and (BZ) bronze.	1,273.38	45.12
26 05 33 16-0330	EA	Recessed Prewired Assembly With Flush Style Cover (Wiremold 8ATP) Note: For tile, wood and laminate floors. For use in 8" diameter cored hole. Devices are recessed 3 1/4" [83mm] below floor surface. Die-cast aluminum cover assembly is available in the following finishes: (BK) painted black, (GY) painted gray, (NK) nickel, (BS) brass, and (BZ) bronze.	1,211.04	45.12
26 05 33 16-0331	EA	Recessed Prewired Assembly With Flush Style Cover (Wiremold 8AT2P) Note: For tile, wood and laminate floors. For use in 8" diameter cored hole. Devices are recessed 3 1/4" [83mm] below floor surface. Die-cast aluminum cover assembly is available in the following finishes: (BK) painted black, (GY) painted gray, (NK) nickel, (BS) brass, and (BZ) bronze.	1,287.50	45.12

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 16-0332	EA	Recessed Assembly With Surface Style Cover (Wiremold 8ATC) Note: For carpet, tile, wood and laminate floors. For use in 8" diameter cored hole. Devices are recessed 3 1/4" below floor surface. Diecast aluminum cover assembly is available in the following finishes: (BK) painted black, (GY) painted gray, (NK) nickel, (BS) brass, and (BZ) bronze.	1,199.30	45.12
26 05 33 16-0333	EA	Recessed Assembly With Flush Style Cover (Wiremold 8AT) Note: For tile, wood and laminate floors. For use in 8" diameter cored hole. Devices are recessed 3 1/4" below floor surface. Diecast aluminum cover assembly is available in the following finishes: (BK) painted black, (GY) painted gray, (NK) nickel, (BS) brass, and (BZ) bronze.	1,188.18	45.12
26 05 33 16-0334	EA	Recessed Assembly With Disposable Plate (Wiremold 8STC) Note: Includes 8" core hole poke-thru stem assembly with a disposable plate. Devices are recessed 3 1/4" below floor surface. No cover assembly is included. For use with the following cover assemblies (purchased separately): 8CTC and 8CT Series.	711.20	42.30
26 05 33 16-0335	EA	Recessed Prewired Assembly With Disposable Plate (Wiremold 8STCP) Note: Includes 8" core hole poke-thru stem assembly with a disposable plate. Devices are recessed 3 1/4" below floor surface. No cover assembly is included. For use with the following cover assemblies (purchased separately): 8CTC and 8CT Series.	799.03	42.30
26 05 33 16-0336	EA	8" Pre-Pour Poke-Thru Sleeve (Wiremold 8PPS) Note: Non-metallic sleeve attaches to structural decking and maintains 8" to 8 1/8" diameter cast in core hole. Unit includes three (3) attachment legs, two (2) end caps and three (3) thumb screws.	197.34	22.56
26 05 33 16-0337	EA	Surface Style Cover Assembly (Wiremold 8CTC) Note: Die-cast aluminum cover assembly. Cover assembly is available in the following finishes: (BK) painted black, (GY) painted gray, (NK) nickel, (BS) brass, and (BZ) bronze. 8CTC Series Cover Assemblies designed for use with 8STC and 8STCP Poke-Thru Stem Assemblies.	424.65	11.28
26 05 33 16-0338	EA	Flush Style Cover Assembly (Wiremold 8CT) Note: Die-cast aluminum cover assembly. Cover assembly is available in the following finishes: (BK) painted black, (GY) painted gray, (NK) nickel, (BS) brass, and (BZ) bronze. 8CTC Series Cover Assemblies designed for use with 8STC and 8STCP Poke-Thru Stem Assemblies. Includes one (1) 8TS Tile Shim.	424.65	11.28
26 05 33 16-0339	EA	Tile Shim (Wiremold 8TS) Note: Used for floor coverings greater than 5/16". The 8TS will allow the top surface of the cover to be flush with the finished floor. Includes: two (2) 1/8" thick shims and two (2) 1/16" thick shims. Up to a total of 3/8" [9.5mm] of adjustment.	73.22	2.82
26 05 33 16-0340	EA	Device Mounting Plate (Wiremold 8B) Note: Singlegang device plate used to blank off any one (1) of the three (3) gangs in the center compartment, when no devices are used.	21.78	5.64
26 05 33 16-0341	EA	Device Mounting Plate (Wiremold 8DP) Note: Singlegang device plate that accepts standard 20 amperes duplex receptacle or a duplex Turnlok receptacle. Fits in any one (1) of the three (3) gangs in the center compartment. Devices supplied by others.	21.92	5.64
26 05 33 16-0342	EA	Device Mounting Plate (Wiremold 8DEC) Note: Singlegang device plate that will accept Decorator style devices such as 20 amperes receptacles, GGCIs, 106 adapters or A/V devices. Fits in any one (1) of the three (3) gangs in the center compartment. Devices supplied by others.	22.07	5.64
26 05 33 16-0343	EA	Device Mounting Plate (Wiremold 8ACT6A) Note: Singlegang device plate that will accept up to six (6) ports of communication devices. Fits in any one (1) of the three (3) gangs in the center compartment. Devices supplied by others.	25.97	5.64
26 05 33 16-0344	EA	Mosaic Mounting Plate (Wiremold 8MOS) Note: Device plate accepts three (3) standard Mosaic devices. Devices supplied by others.	31.96	5.64
26 05 33 16-0345	EA	Crestron Double Gang Plate (Wiremold 8CREST) Note: Device plate accepts Crestron double-gang decorator style devices.	31.91	5.64
26 05 33 16-0346	EA	Device Mounting Plate (Wiremold 8S1) Note: Receptacle opening 1 3/8". For 8" poke-thru units only.	21.05	5.64
26 05 33 16-0347	EA	Device Mounting Plate (Wiremold 8S2) Note: Receptacle opening 1 9/16". For 8" poke-thru units only.	21.34	5.64
26 05 33 16-0348	EA	Device Mounting Plate (Wiremold 8TRAC) Note: Singlegang device plate that will accept up to six (6) Ortronics TracJack devices. Fits in any one (1) of the three (3) gangs in the center compartment. Devices supplied by others.	21.05	5.64
26 05 33 16-0349	EA	Device Mounting Plate (Wiremold 8SER) Note: Singlegang device plate that will accept up to three (3) Ortronics Series II dual modular inserts. Fits in any one (1) of the three (3) gangs in the center compartment. Devices supplied by others.	21.05	5.64
26 05 33 16-0350	EA	Device Mounting Plate (Wiremold 8MAAP) Note: Singlegang device plate that will accept up to four (4) Extron® Electronics MAAP style plates. Fits in any one (1) of the three (3) gangs in the center compartment. Devices supplied by others.	31.42	5.64
26 05 33 16-0351	EA	Device Mounting Plate (Wiremold 8AAP) Note: Twogang device plate that will accept up to four (4) Extron® Electronics AAP style plates. 8AAP takes up 2 of the 3 gangs in the center compartment. Devices supplied by others.	25.79	5.64
26 05 33 16-0352	EA	8" Divider (Wiremold 8DIV) Note: Divider allows for separation of services when required.	30.10	5.64
26 05 33 16-0353	EA	Bottom Housing Assembly (Wiremold 22CHA) Note: Two-gang 2" trade size conduit housing assembly. Used on 8AT Series devices. Covers two (2) of the three (3) gangs in the center compartment. Only for use with 8AT Series units.	39.30	11.28

26 05 33 23 Surface Raceways for Electrical Systems *(26 05 33)*

26 05 33 23-0001 Raceways *(26 05 33 23)*

26 05 33 23-0002 Wireway With Screw Cover *(26 05 33 23-0001)*

Note: Also known as wire trough. Galvanized steel construction. Mounted exposed on flat wall surface.

26 05 33 23-0003 2-1/2" x 2-1/2", Wireway With Screw Cover *(26 05 33 23-0002)*

26 05 33 23-0004	LF	2-1/2" x 2-1/2", NEMA 1, Surface Mounted Wireway With Screw Cover	31.71	5.15
		For Combination Hinged Screw Cover, Add	*1.07*	
		For Concrete Or Masonry Surface, Add	*0.52*	
26 05 33 23-0005	EA	2-1/2" x 2-1/2", End Plate For Surface Mounted Wireway With Screw Cover	23.22	7.73
		For Combination Hinged Screw Cover, Add	*0.39*	
26 05 33 23-0006	EA	2-1/2" x 2-1/2", Coupling For Surface Mounted Wireway With Screw Cover	27.03	9.64
		For Combination Hinged Screw Cover, Add	*0.39*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 23-0007	EA	2-1/2" x 2-1/2", Panel Adapter For Surface Mounted Wireway With Screw Cover	58.83	18.03
		For Combination Hinged Screw Cover, Add	*1.14*	
26 05 33 23-0008	EA	2-1/2" x 2-1/2", Elbow For Surface Mounted Wireway With Screw Cover	104.17	18.03
		For Combination Hinged Screw Cover, Add	*3.41*	
26 05 33 23-0009	EA	2-1/2" x 2-1/2", Tee For Surface Mounted Wireway With Screw Cover	155.23	25.66
		For Combination Hinged Screw Cover, Add	*5.20*	
26 05 33 23-0010	EA	2-1/2" x 2-1/2", Cross For Surface Mounted Wireway With Screw Cover	174.61	28.34
		For Combination Hinged Screw Cover, Add	*5.90*	
26 05 33 23-0011		**4" x 4", Wireway With Screw Cover** *(26 05 33 23-0002)*		
26 05 33 23-0012	LF	4" x 4", NEMA 1, Surface Mounted Wireway With Screw Cover	38.73	6.49
		For Combination Hinged Screw Cover, Add	*1.29*	
		For Concrete Or Masonry Surface, Add	*0.65*	
26 05 33 23-0013	LF	4" x 4", NEMA 3R, Surface Mounted Wireway With Screw Cover	73.89	6.49
		For Combination Hinged Screw Cover, Add	*3.05*	
		For Concrete Or Masonry Surface, Add	*0.65*	
26 05 33 23-0014	EA	4" x 4", End Plate For Surface Mounted Wireway With Screw Cover	19.43	5.67
		For Combination Hinged Screw Cover, Add	*0.41*	
26 05 33 23-0015	EA	4" x 4", Coupling For Surface Mounted Wireway With Screw Cover	29.74	10.82
		For Combination Hinged Screw Cover, Add	*0.41*	
26 05 33 23-0016	EA	4" x 4", Panel Adapter For Surface Mounted Wireway With Screw Cover	68.82	22.05
		For Combination Hinged Screw Cover, Add	*1.23*	
26 05 33 23-0017	EA	4" x 4", Elbow For Surface Mounted Wireway With Screw Cover	118.67	22.05
		For Combination Hinged Screw Cover, Add	*3.73*	
26 05 33 23-0018	EA	4" x 4", Tee For Surface Mounted Wireway With Screw Cover	170.25	28.65
		For Combination Hinged Screw Cover, Add	*5.65*	
26 05 33 23-0019	EA	4" x 4", Cross For Surface Mounted Wireway With Screw Cover	196.36	33.49
		For Combination Hinged Screw Cover, Add	*6.47*	
26 05 33 23-0020		**6" x 6", Wireway With Screw Cover** *(26 05 33 23-0002)*		
26 05 33 23-0021	LF	6" x 6", NEMA 1, Surface Mounted Wireway With Screw Cover	59.49	7.73
		For Combination Hinged Screw Cover, Add	*2.20*	
		For Concrete Or Masonry Surface, Add	*0.77*	
26 05 33 23-0022	LF	6" x 6", NEMA 3R, Surface Mounted Wireway With Screw Cover	121.16	7.73
		For Combination Hinged Screw Cover, Add	*5.28*	
		For Concrete Or Masonry Surface, Add	*0.77*	
26 05 33 23-0023	EA	6" x 6", End Plate For Surface Mounted Wireway With Screw Cover	25.40	6.19
		For Combination Hinged Screw Cover, Add	*0.65*	
26 05 33 23-0024	EA	6" x 6", Coupling For Surface Mounted Wireway With Screw Cover	38.80	12.89
		For Combination Hinged Screw Cover, Add	*0.65*	
26 05 33 23-0025	EA	6" x 6", Panel Adapter For Surface Mounted Wireway With Screw Cover	101.86	25.66
		For Combination Hinged Screw Cover, Add	*2.53*	
26 05 33 23-0026	EA	6" x 6", Elbow For Surface Mounted Wireway With Screw Cover	154.50	25.66
		For Combination Hinged Screw Cover, Add	*5.16*	
26 05 33 23-0027	EA	6" x 6", Tee For Surface Mounted Wireway With Screw Cover	249.64	32.05
		For Combination Hinged Screw Cover, Add	*9.28*	
26 05 33 23-0028	EA	6" x 6", Cross For Surface Mounted Wireway With Screw Cover	268.57	37.10
		For Combination Hinged Screw Cover, Add	*9.72*	
26 05 33 23-0029		**8" x 8", Wireway With Screw Cover** *(26 05 33 23-0002)*		
26 05 33 23-0030	LF	8" x 8", NEMA 1, Surface Mounted Wireway With Screw Cover	99.36	8.45
		For Combination Hinged Screw Cover, Add	*4.13*	
		For Concrete Or Masonry Surface, Add	*0.84*	
26 05 33 23-0031	LF	8" x 8", NEMA 3R, Surface Mounted Wireway With Screw Cover	187.17	8.45
		For Combination Hinged Screw Cover, Add	*8.52*	
		For Concrete Or Masonry Surface, Add	*0.84*	
26 05 33 23-0032	EA	8" x 8", End Plate For Surface Mounted Wireway With Screw Cover	28.06	6.70
		For Combination Hinged Screw Cover, Add	*0.73*	
26 05 33 23-0033	EA	8" x 8", Coupling For Surface Mounted Wireway With Screw Cover	42.49	13.91
		For Combination Hinged Screw Cover, Add	*0.73*	
26 05 33 23-0034	EA	8" x 8", Panel Adapter For Surface Mounted Wireway With Screw Cover	113.96	28.24
		For Combination Hinged Screw Cover, Add	*2.87*	
26 05 33 23-0035	EA	8" x 8", Elbow For Surface Mounted Wireway With Screw Cover	199.45	28.24
		For Combination Hinged Screw Cover, Add	*7.15*	
26 05 33 23-0036	EA	8" x 8", Tee For Surface Mounted Wireway With Screw Cover	303.27	34.84
		For Combination Hinged Screw Cover, Add	*11.68*	
26 05 33 23-0037	EA	8" x 8", Cross For Surface Mounted Wireway With Screw Cover	428.63	42.26
		For Combination Hinged Screw Cover, Add	*17.21*	
26 05 33 23-0038		**10" x 10", Wireway With Screw Cover** *(26 05 33 23-0002)*		
26 05 33 23-0039	LF	10" x 10", NEMA 1, Surface Mounted Wireway With Screw Cover	146.26	9.79
		For Combination Hinged Screw Cover, Add	*6.33*	
		For Concrete Or Masonry Surface, Add	*0.98*	
26 05 33 23-0040	LF	10" x 10", NEMA 3R, Surface Mounted Wireway With Screw Cover	265.10	9.79
		For Combination Hinged Screw Cover, Add	*12.27*	
		For Concrete Or Masonry Surface, Add	*0.98*	
26 05 33 23-0041	EA	10" x 10", End Plate For Surface Mounted Wireway With Screw Cover	40.64	7.73
		For Combination Hinged Screw Cover, Add	*1.26*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 23-0042	EA	10" x 10", Coupling For Surface Mounted Wireway With Screw Cover	56.09	15.46
		For Combination Hinged Screw Cover, Add	*1.26*	
26 05 33 23-0043	EA	10" x 10", Panel Adapter For Surface Mounted Wireway With Screw Cover	157.75	30.71
		For Combination Hinged Screw Cover, Add	*4.81*	
26 05 33 23-0044	EA	10" x 10", Elbow For Surface Mounted Wireway With Screw Cover	327.35	30.71
		For Combination Hinged Screw Cover, Add	*13.29*	
26 05 33 23-0045	EA	10" x 10", Tee For Surface Mounted Wireway With Screw Cover	501.48	38.75
		For Combination Hinged Screw Cover, Add	*21.20*	
26 05 33 23-0046	EA	10" x 10", Cross For Surface Mounted Wireway With Screw Cover	724.86	43.80
		For Combination Hinged Screw Cover, Add	*31.86*	

26 05 33 23-0047 12" x 12", Wireway With Screw Cover *(26 05 33 23-0002)*

26 05 33 23-0048	LF	12" x 12", NEMA 1, Surface Mounted Wireway With Screw Cover	171.48	11.85
		For Combination Hinged Screw Cover, Add	*7.39*	
		For Concrete Or Masonry Surface, Add	*1.19*	
26 05 33 23-0049	LF	12" x 12", NEMA 3R, Surface Mounted Wireway With Screw Cover	290.91	11.85
		For Combination Hinged Screw Cover, Add	*13.36*	
		For Concrete Or Masonry Surface, Add	*1.19*	
26 05 33 23-0050	EA	12" x 12", End Plate For Surface Mounted Wireway With Screw Cover	54.99	8.24
		For Combination Hinged Screw Cover, Add	*1.93*	
26 05 33 23-0051	EA	12" x 12", Coupling For Surface Mounted Wireway With Screw Cover	71.48	16.49
		For Combination Hinged Screw Cover, Add	*1.93*	
26 05 33 23-0052	EA	12" x 12", Panel Adapter For Surface Mounted Wireway With Screw Cover	212.54	33.49
		For Combination Hinged Screw Cover, Add	*7.28*	
26 05 33 23-0053	EA	12" x 12", Elbow For Surface Mounted Wireway With Screw Cover	437.13	33.49
		For Combination Hinged Screw Cover, Add	*18.51*	
26 05 33 23-0054	EA	12" x 12", Tee For Surface Mounted Wireway With Screw Cover	565.37	41.22
		For Combination Hinged Screw Cover, Add	*24.15*	
26 05 33 23-0055	EA	12" x 12", Cross For Surface Mounted Wireway With Screw Cover	938.29	46.38
		For Combination Hinged Screw Cover, Add	*42.28*	

26 05 33 23-0056 Surface Metal Raceways *(26 05 33 23-0001)*

Note: Exposed on flat wall surface.

26 05 33 23-0057 One Piece Surface Metal Raceways *(26 05 33 23-0056)*

Note: Exposed installations on masonry, concrete block or drywall walls or ceilings. (Wiremold or approved equal).

26 05 33 23-0058 3/4" x 17/32" One Piece Surface Metal Raceways (Wiremold #500) *(26 05 33 23-0057)*

Note: Available in ivory.

26 05 33 23-0059	LF	3/4" x 17/32" One Piece Surface Metal Raceway (Wiremold #500)	4.89	1.54
		For Concrete Or Masonry Surface, Add	*0.15*	
26 05 33 23-0060	EA	Bushing (Wiremold #502)	4.55	2.07
26 05 33 23-0061	EA	One Or Two Hole Strap (Wiremold #504)	4.61	2.07
26 05 33 23-0062	EA	Connection Cover (Wiremold #506)	4.81	2.07
26 05 33 23-0063	EA	Flat 90 Degree Elbow (Wiremold #511)	7.60	2.48
26 05 33 23-0064	EA	Flat 45 Degree Elbow (Wiremold #512)	13.34	2.58
26 05 33 23-0065	EA	Adjustable Internal Elbow (Wiremold #517)	9.49	3.09
26 05 33 23-0066	EA	Adjustable External Elbow (Wiremold #518)	9.24	3.09

26 05 33 23-0067 3/4" x 21/32" One Piece Surface Metal Raceways (Wiremold #700) *(26 05 33 23-0057)*

Note: Available in ivory and white.

26 05 33 23-0068	LF	3/4" x 21/32" One Piece Surface Metal Raceway (Wiremold #700)	6.15	2.07
		For Concrete Or Masonry Surface, Add	*0.21*	
26 05 33 23-0069	EA	Bushing (Wiremold #702)	4.70	2.07
26 05 33 23-0070	EA	One Or Two Hole Strap (Wiremold #704)	4.87	2.07
26 05 33 23-0071	EA	Connection Cover (Wiremold #706)	4.92	2.07
26 05 33 23-0072	EA	Flat 90 Degree Elbow (Wiremold #711)	11.03	4.12
26 05 33 23-0073	EA	Flat 45 Degree Elbow (Wiremold #712)	18.42	4.12
26 05 33 23-0074	EA	Adjustable Internal Elbow (Wiremold #717)	12.04	4.12
26 05 33 23-0075	EA	Adjustable External Elbow (Wiremold #718)	11.57	4.12

26 05 33 23-0076 One Piece Surface Metal Raceways Fittings (Wiremold #500 And 700 Fittings) *(26 05 33 23-0057)*

Note: Available in ivory.

26 05 33 23-0077	EA	18" Flex Fitting, For #500 Or 700 (Wiremold #5700F)	37.12	3.09
26 05 33 23-0078	EA	Galvanized Coupling For #500 Or 700 (Wiremold #5701)	4.85	2.07
26 05 33 23-0079	EA	Supporting Clip, For #500 Or 700 (Wiremold #5703)	4.85	2.07
26 05 33 23-0080	EA	Ground Clamp (Wiremold #5709)	15.39	3.09
26 05 33 23-0081	EA	Grounding Connector (Wiremold #5709GC)	12.78	3.09
26 05 33 23-0082	EA	L Or R (Left Or Right) Twisted Internal Ell (Wiremold #5711)	14.23	4.12
26 05 33 23-0083	EA	Tee (Wiremold #5715)	15.78	5.15
26 05 33 23-0084	EA	2-1/2" x 2-3/8" x 2-1/2" Corner Box (Wiremold #5719)	29.64	4.12
26 05 33 23-0085	EA	Utility Box For #500 Or #700 (Wiremold #57242)	22.37	4.12
26 05 33 23-0086	EA	2-3/8" Diameter, Blank Cover (Wiremold #5731)	11.86	2.58
26 05 33 23-0087	EA	3" Diameter, Outlet Box (Wiremold #5733)	28.15	4.12
26 05 33 23-0088	EA	4-3/4" Square x 1-3/8" Deep, Distribution Box (Wiremold #5735)	28.03	4.12
26 05 33 23-0089	EA	4-3/8" Blank Cover (Wiremold #5736)	12.64	2.58

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 23-0090	EA	4-3/4" Diameter, Extension Box/Open Base (Wiremold #5737)	25.29	4.12
26 05 33 23-0091	EA	5-1/2" Diameter, Extension Box/Open Base (Wiremold #5737A)	24.34	4.12
26 05 33 23-0092	EA	4-3/4" Diameter, Fixture Box/Solid Base (Wiremold #5738)	24.57	4.12
26 05 33 23-0093	EA	5-1/2" Diameter, Fixture Box/Solid Base (Wiremold #5738A)	24.57	4.12
26 05 33 23-0094	EA	5-1/2" Diameter, Fan Box/Solid Base (Wiremold #5738AF)	28.03	4.12
26 05 33 23-0095	EA	6-3/8" Diameter, Fixture Box/Solid Base (Wiremold #5739)	27.66	4.12
26 05 33 23-0096	EA	6-3/8" Diameter, Extension Box/Open Base (Wiremold #5739A)	29.65	4.12
26 05 33 23-0097	EA	Standard Switch Box For #500, Or #700 (Wiremold #57240)	32.47	6.70
26 05 33 23-0098	EA	Duplex Receptacle And Box, Ground, For #500 Or #700 (Wiremold #57243G)	50.32	12.89
26 05 33 23-0099	EA	2-13/16" x 4-5/8" x 1-3/8" Switch And Receptacle Box For Shallow Type Switches (Wiremold #5741)	23.76	6.70
26 05 33 23-0100	EA	1 Gang, 4-5/8" x 2-7/8" x 2-3/4" Extra Deep Switch And Receptacle Box (Wiremold #5744)	39.49	6.70
26 05 33 23-0101	EA	2 Gang, 4-3/4" x 4-3/4" x 2-3/4" Extra Deep Switch And Receptacle Box (Wiremold #5744-2)	45.73	6.70
26 05 33 23-0102	EA	3 Gang, 4-5/8" x 6-1/2" x 2-3/4" Extra Deep Switch And Receptacle Box (Wiremold #5744-3)	71.11	6.70
26 05 33 23-0103	EA	1 Gang, Signal Box (Wiremold #5744S)	35.96	5.67
26 05 33 23-0104	EA	2 Gang, Signal Box (Wiremold #5744S-2)	40.46	5.67
26 05 33 23-0105	EA	3 Gang, Signal Box (Wiremold #5744S-3)	66.55	5.67
26 05 33 23-0106	EA	4-5/8" x 2-7/8" x 1-3/4" Combination Switch And Receptacle Box With 1/2" KO's (Wiremold #5745)	24.96	6.70
26 05 33 23-0107	EA	4-5/8" x 2-7/8" x 1-3/8", 1 Gang, Shallow Switch And Receptacle Box For Standard Shallow Devices (Wiremold #5747)	21.55	6.70
26 05 33 23-0108	EA	4-3/4" x 4-3/4" x 1-3/8", 2 Gang, Shallow Switch And Receptacle Box For Standard Shallow Devices (Wiremold #5747-2)	31.63	6.70
26 05 33 23-0109	EA	4-5/8" x 6-1/2" x 2-3/4", 3 Gang, Shallow Switch And Receptacle Box For Standard Shallow Devices (Wiremold #5747-3)	64.62	6.70
26 05 33 23-0110	EA	4-5/8" x 2-7/8" x 1-3/4", 1 Gang, Switch And Receptacle Box For Deep Devices (Wiremold #5748)	23.26	6.70
26 05 33 23-0111	EA	4-3/4" x 4-3/4" x 1-3/4", 2 Gang, Switch And Receptacle Box For Deep Devices (Wiremold #5748-2)	33.67	6.70
26 05 33 23-0112	EA	4-5/8" x 6-1/2" x 1-3/4", 3 Gang, Switch And Receptacle Box For Deep Devices (Wiremold #5748-3)	62.72	6.70
26 05 33 23-0113	EA	4-5/8" x 8-11/32" x 1-3/4", 4 Gang, Switch And Receptacle Box For Deep Devices (Wiremold #5748-4)	94.67	6.70
26 05 33 23-0114	EA	4-5/8" x 10-5/32" x 1-3/4", 5 Gang, Switch And Receptacle Box For Deep Devices (Wiremold #5748-5)	158.21	6.70
26 05 33 23-0115	EA	4-5/8" x 11-31/32" x 1-3/4", 6 Gang, Switch And Receptacle Box For Deep Devices (Wiremold #5748-6)	161.05	6.70
26 05 33 23-0116	EA	4-3/8" x 2-7/8" x 15/16" Shallow Switch And Receptacle Box For Shallow Duplex Devices (Wiremold #5748-S)	22.93	6.70
26 05 33 23-0117	EA	4-5/8" x 2-7/8" x 15/16", 1 Gang, Flush-Type Extension Adapter (Wiremold #5751)	22.21	6.70
26 05 33 23-0118	EA	4-3/4" x 4-3/4" x 15/16", 2 Gang, Flush-Type Extension Adapter (Wiremold #5751-2)	30.61	6.70
26 05 33 23-0119	EA	4-5/8" x 6-1/2" x 15/16", 3 Gang, Flush-Type Extension Adapter (Wiremold #5751-3)	63.36	6.70
26 05 33 23-0120	EA	4-5/8" x 2-7/8" x 1-3/4", 1 Gang, Deep Flush-Type Extension Adapter (Wiremold #5751A)	24.26	6.70
26 05 33 23-0121	EA	4-11/16" x 4-11/16" x 1-3/8", 2 Gang, Alarm Device Box (Wiremold #5752)	32.38	6.70
26 05 33 23-0122	EA	4-11/16" x 4-11/16" x 2-3/4", 2 Gang, Extra Deep Alarm Device Box (Wiremold #5753)	48.08	6.70
26 05 33 23-0123	EA	Blank Extension Box (Wiremold #5760)	16.58	2.58
26 05 33 23-0124	EA	1/2" Special Nipple (Wiremold #5780)	15.74	2.58
26 05 33 23-0125	EA	1/2" Box Connector (Wiremold #5781)	10.05	2.58
26 05 33 23-0126	EA	3/4" Box Connector (Wiremold #5781A)	19.82	3.09
26 05 33 23-0127	EA	1/2" Conduit Connector (Wiremold #5782)	10.15	2.58
26 05 33 23-0128	EA	3/4" Conduit Connector (Wiremold #5782A)	25.22	3.09
26 05 33 23-0129	EA	1/2" Elbow Conduit Connector (Wiremold #5784)	22.43	3.09
26 05 33 23-0130	EA	Combination Connector, To Any 3-1/4" Or 4" Outlet Box (Wiremold #5785)	11.81	3.09
26 05 33 23-0131	EA	Offset Connector (Wiremold #5786)	20.72	3.09
26 05 33 23-0132	EA	Armor Cable Connector (Wiremold #5790B)	10.32	2.58
26 05 33 23-0133	EA	1/2" Electrical Metallic Tubing (EMT) Connector, For #500 Or 700 (Wiremold #5791)	9.24	2.07
26 05 33 23-0134		1-9/16" x 11/32" One Piece Surface Metal Raceways (Wiremold #1500) *(26 05 33 23-0057)*		
		Note: Galvanized finish.		
26 05 33 23-0135	LF	1-9/16" x 11/32" One Piece Surface Metal Raceway (Wiremold #1500-10)	9.11	2.58
		For Concrete Or Masonry Surface, Add	*0.26*	
26 05 33 23-0136	EA	Wire Clip (Wiremold #1500WC)	5.43	2.07
26 05 33 23-0137	EA	Bushing (Wiremold #1502)	6.37	2.58
26 05 33 23-0138	EA	2-Hole Strap (Wiremold #1504)	7.11	3.09
26 05 33 23-0139	EA	Flat Elbow (Wiremold #1511)	28.64	9.79
26 05 33 23-0140	EA	Internal Elbow (Wiremold #1517)	29.77	9.79
26 05 33 23-0141	EA	Adapter Fitting (Wiremold #1517B)	32.38	9.79
26 05 33 23-0142	EA	External Elbow (Wiremold #1518)	32.16	9.79
26 05 33 23-0143	EA	Utility Box (Wiremold #1528)	30.16	6.70
26 05 33 23-0144	EA	Junction Box (Wiremold #1542D)	31.21	6.70
26 05 33 23-0145	EA	Duplex Receptacle (Wiremold #1543GL)	61.29	12.89
26 05 33 23-0146	EA	Single Receptacle Box (Wiremold #1546A)	32.24	6.70
26 05 33 23-0147	EA	Duplex Receptacle Box (Wiremold #1546B)	40.22	6.70
26 05 33 23-0148	EA	Telephone Box (Wiremold #1546T)	39.39	6.70
26 05 33 23-0149	EA	Combination Connection (Wiremold #1585)	19.12	3.09
26 05 33 23-0150		2-7/32" x 28/32" One Piece Surface Metal Raceways (Wiremold #2600) *(26 05 33 23-0057)*		
		Note: Galvanized finish.		
26 05 33 23-0151	LF	2-7/32" x 28/32" One Piece Surface Metal Raceway (Wiremold #2600-10)	14.61	4.63
		For Concrete Or Masonry Surface, Add	*0.46*	
26 05 33 23-0152	EA	Wire Clip (Wiremold #2600WC)	5.40	2.07
26 05 33 23-0153	EA	Fiber Bushing (Wiremold #2602)	6.12	2.07
26 05 33 23-0154	EA	2-5/8", 90 Degree Flat Elbow (Wiremold #2611)	23.16	3.61
26 05 33 23-0155	EA	5" Diameter, Junction Box (Wiremold #2642D)	34.77	5.15
26 05 33 23-0156	EA	Service Fitting (Wiremold #2686FO)	33.70	6.19

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 23-0157		Two Piece Surface Metal Raceways *(26 05 33 23-0056)*			
		Note: Exposed installations on masonry, concrete block or drywall walls or ceilings. (Wiremold or approved equal).			
26 05 33 23-0158		1-9/32" x 3/4" Two Piece Surface Metal Raceways (Wiremold #2000) *(26 05 33 23-0157)*			
26 05 33 23-0159	LF	1-9/32" x 3/4" Two Piece Surface Metal Raceway Base And Cover (Wiremold #2000BC)		8.52	2.58
		For Concrete Or Masonry Surface, Add		*0.26*	
26 05 33 23-0160	EA	Wire Clip (Wiremold #2000WC)		3.96	2.07
26 05 33 23-0161	EA	Coupling (Wiremold #2001)		10.36	2.58
26 05 33 23-0162	EA	Supporting Clip (Wiremold #2003)		5.29	1.54
26 05 33 23-0163	EA	Cover Clip (Wiremold #2006)		4.86	1.54
26 05 33 23-0164	EA	Ground Clamp (Wiremold #2009)		13.17	2.58
26 05 33 23-0165	EA	Entrance End Fitting (Wiremold #2010A2)		25.06	7.73
26 05 33 23-0166	EA	Entrance End Fitting (Wiremold #2010A3)		43.98	10.31
26 05 33 23-0167	EA	Blank End Fitting (Wiremold #2010B)		6.44	2.58
26 05 33 23-0168	EA	Flat 90 Degree Elbow (Wiremold #2011)		21.53	6.70
26 05 33 23-0169	EA	Tee (Wiremold #2015)		40.47	9.69
26 05 33 23-0170	EA	Internal Corner Coupling (Wiremold #2017TC)		13.48	5.15
26 05 33 23-0171	EA	Single Gang Device Box (Wiremold #2048)		32.95	9.18
26 05 33 23-0172	EA	2-Gang device Box (Wiremold #2048-2)		53.61	10.20
26 05 33 23-0173	EA	Flush Plate Adapter (Wiremold #2051H)		35.60	10.20
26 05 33 23-0174	EA	Side Reducing Connector (Wiremold #2089)		30.65	5.15
26 05 33 23-0175	EA	#2089E End Reducing Connector		12.46	2.58
26 05 33 23-0176		1-7/8" x 7/8" Two Piece Surface Metal Raceways (Wiremold #2400) *(26 05 33 23-0157)*			
		Note: Available in gray enamel (G) or ivory (V).			
26 05 33 23-0177	LF	1-7/8" x 7/8" Two Piece Surface Metal Raceway Base (Wiremold #2400B)		7.14	2.58
		For Concrete Or Masonry Surface, Add		*0.26*	
26 05 33 23-0178	LF	1-7/8" x 7/8" Divided Two Piece Surface Metal Raceway Base (Wiremold #2400BD)		7.93	2.58
		For Concrete Or Masonry Surface, Add		*0.26*	
26 05 33 23-0179	LF	Raceway Cover (Wiremold #2400C)		3.06	0.51
26 05 33 23-0180	EA	Wire Clip (Wiremold #2400WC)		3.96	2.07
26 05 33 23-0181	EA	Coupling (Wiremold #2401)		10.27	2.58
26 05 33 23-0182	EA	Divided Raceway Coupling (Wiremold #2401D)		8.96	2.58
26 05 33 23-0183	EA	Cover Clip (Wiremold #2406)		4.91	1.54
26 05 33 23-0184	EA	Device Bracket Frame (Wiremold #2407-2CM)		38.11	7.73
26 05 33 23-0185	EA	Device Bracket Frame (Wiremold #2407-2TJ)		36.38	7.73
26 05 33 23-0186	EA	Ground Clamp (Wiremold #2409)		10.16	2.07
26 05 33 23-0187	EA	End Fitting (Wiremold #2410A)		23.93	7.73
26 05 33 23-0188	EA	Blank End (Wiremold #2410B)		6.52	2.58
26 05 33 23-0189	EA	Divided Blank End Fitting (Wiremold #2410BD)		6.62	2.58
26 05 33 23-0190	EA	Entrance End Fitting (Wiremold #2410C)		37.95	7.73
26 05 33 23-0191	EA	Divided Entrance End Fitting (Wiremold #2410D)		36.27	7.73
26 05 33 23-0192	EA	Divided Entrance End Fitting (Wiremold #2410DFO)		61.38	7.73
26 05 33 23-0193	EA	Full Cap Entrance End Fitting (Wiremold #2410FC)		46.32	7.73
26 05 33 23-0194	EA	Divided Flat 90 Degree Elbow (Wiremold #2411D)		27.19	7.73
26 05 33 23-0195	EA	Radiused Divided Flat 90 Degree Elbow (Wiremold #2411DFO)		45.38	7.73
26 05 33 23-0196	EA	Radiused Flat 90 Degree Elbow (Wiremold #2411FO)		40.34	7.62
26 05 33 23-0197	EA	Flat 90 Degree Elbow (Wiremold #2411M)		25.78	7.73
26 05 33 23-0198	EA	Radiused Divided Tee (Wiremold #2415DFO)		48.93	7.62
26 05 33 23-0199	EA	Radiused Tee (Wiremold #2415FO)		46.37	7.62
26 05 33 23-0200	EA	Tee (Wiremold #2415M)		31.14	7.62
26 05 33 23-0201	EA	Divided Internal Coupling (Wiremold #2417D)		25.48	7.62
26 05 33 23-0202	EA	Radiused Divided Internal Coupling (Wiremold #2417DFO)		41.75	7.62
26 05 33 23-0203	EA	Radiused Internal Coupling (Wiremold #2417FO)		40.42	7.62
26 05 33 23-0204	EA	Internal Coupling (Wiremold #2417M)		24.59	7.62
26 05 33 23-0205	EA	Radiused Divided External Coupling (Wiremold #2418DFO)		45.66	7.62
26 05 33 23-0206	EA	Radiused External Coupling (Wiremold #2418FO)		44.87	7.62
26 05 33 23-0207	EA	External Coupling (Wiremold #2418M)		30.56	7.62
26 05 33 23-0208	EA	1 Gang, Extra Deep Switch And Receptacle (Wiremold #2444)		41.64	6.70
26 05 33 23-0209	EA	2 Gang, Extra Deep Switch And Receptacle Box (Wiremold #2444-2)		46.53	6.70
26 05 33 23-0210	EA	Over Raceway, Extra Deep Switch And Receptacle Box, 2 Gang (Wiremold #2444-2LS)		46.78	6.70
26 05 33 23-0211	EA	Divided, 1 Gang, Extra Deep Switch And Receptacle (Wiremold #2444D)		44.71	6.70
26 05 33 23-0212	EA	Divided, 2 Gang, Extra Deep Switch And Receptacle Box (Wiremold #2444D-2A)		64.24	6.70
26 05 33 23-0213	EA	Divided, Over Raceway, 2 Gang, Extra Deep Switch And Receptacle Box (Wiremold #2444D-2N)		56.22	6.70
26 05 33 23-0214	EA	4-5/8" x 2-7/8" x 1-3/4", 1 Gang, Switch And Receptacle Box For Shallow Devices (Wiremold #2448)		28.34	6.70
26 05 33 23-0215	EA	4-3/4" x 4-3/4" x 1-3/4", 2 Gang, Switch And Receptacle Box For Shallow Devices (Wiremold #2448-2)		45.45	6.70
26 05 33 23-0216	EA	Device Bracket Type Adapter Plate (Wiremold #2450)		13.75	2.58
26 05 33 23-0217	EA	4-1/2" x 4-1/2" Back Feed Fitting (Wiremold #2451H)		31.94	7.73
26 05 33 23-0218	EA	Bridge Fitting For 2400/700/500 (Wiremold #2475D)		101.35	7.73
26 05 33 23-0219	EA	Side Reducing Connector (Wiremold #2489)		28.72	4.12
26 05 33 23-0220		2-3/4" x 1-17/32" Two Piece Surface Metal Raceways (Wiremold #3000) *(26 05 33 23-0157)*			
		Note: Available in gray enamel (G) or ivory (V).			
26 05 33 23-0221	LF	2-3/4" x 1-17/32" Two Piece Surface Metal Raceway Base (Wiremold #3000B)		14.34	4.63
		For Concrete Or Masonry Surface, Add		*0.46*	
26 05 33 23-0222	LF	Raceway Cover (Wiremold #3000CE)		3.66	0.51
26 05 33 23-0223	EA	Wire Clips For Conductors (Wiremold #3000WC)		5.57	2.07

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 23-0224	EA	Couplings (Wiremold #3001)	14.14	2.07
26 05 33 23-0225	EA	Rigid Inside Coupling (Wiremold #3001A)	14.87	2.58
26 05 33 23-0226	EA	Supporting Clip (Wiremold #3003)	10.67	2.58
26 05 33 23-0227	EA	Clip Cover (Wiremold #3006E)	5.88	2.07
26 05 33 23-0228	EA	Device Brackets (Wiremold #3007C)	15.73	4.12
26 05 33 23-0229	EA	C-Hanger (Wiremold #3008C)	16.09	3.09
26 05 33 23-0230	EA	Entrance End Fitting For Connecting To 1/2" Conduit Or Armored Connectors (Wiremold #3010AE)	36.34	9.79
26 05 33 23-0231	EA	Blank End Fittings (Wiremold #3010B)	13.06	4.12
26 05 33 23-0232	EA	Entrance End Fitting For Connecting To Rigid Or Flexible Conduit (Wiremold #3010C)	40.70	9.79
26 05 33 23-0233	EA	Flat 90 Degree Elbow (Wiremold #3011E)	62.01	12.77
26 05 33 23-0234	EA	Wall Box Connector (Wiremold #3014C)	42.63	12.89
26 05 33 23-0235	EA	Tee Fitting (Wiremold #3015E)	85.93	15.97
26 05 33 23-0236	EA	Internal Corner Coupling (Wiremold #3017TCE)	39.67	9.79
26 05 33 23-0237	EA	External Corner (Wiremold #3018AE)	49.94	9.79
26 05 33 23-0238	EA	Single Receptacle Cover With Face Diameters Of 1.38" To 1.4" (Wiremold #3027AE)	34.43	9.79
26 05 33 23-0239	EA	Utility Box (Wiremold #3028)	61.29	9.79
26 05 33 23-0240	EA	Single Receptacle Cover With Face Diameters Of 1.56" To 1.57" (Wiremold #3033JE)	20.04	2.58
26 05 33 23-0241	EA	Blank Cover (Wiremold #3036HE)	22.02	2.58
26 05 33 23-0242	EA	Switch Cover (Wiremold #3040CE)	19.98	2.58
26 05 33 23-0243	EA	Duplex Receptacle Cover (Wiremold #3043BE)	22.22	3.09
26 05 33 23-0244	EA	15 Amperes, 125 Volt Duplex Grounding Receptacle And Cover (Wiremold #3043GE)	56.17	13.40
26 05 33 23-0245	EA	2 Gang, Extra Deep Switch And Receptacle Box (Wiremold #3044-2)	69.54	9.79
26 05 33 23-0246	EA	Duplex Receptacle Cover (Wiremold #3046BE)	19.92	3.09
26 05 33 23-0247	EA	Tap Off Fitting (Wiremold #3046H-2)	22.00	2.58
26 05 33 23-0248	EA	1-15/16" Deep x 6" Long, Circuit Breaker Housing (Wiremold #3046KD)	88.66	6.19
26 05 33 23-0249	EA	2-3/4" Deep x 7-3/8" Long, Circuit Breaker Housing (Wiremold #3046KTSQ)	220.60	6.19
26 05 33 23-0250	EA	1-13/16" Deep x 7-3/8" Long, Circuit Breaker Housing (Wiremold #3046QOU)	76.83	6.19
26 05 33 23-0251	EA	1-13/16" Deep x 7-15/16" Long x 2-13/16" Wide, Bump Up Device Plate Cover (Wiremold #3046S)	83.38	6.19
26 05 33 23-0252	EA	1-13/32" Deep x 7-15/16" Long x 2-13/16" Wide, Bump Up Device Plate Cover (Wiremold #3046U)	83.38	6.19
26 05 33 23-0253	EA	Rectangular Receptacle Cover (Wiremold #3048R)	25.99	3.09

26 05 33 23-0254 4-3/4" x 1-3/4" Two Piece Surface Metal Raceways (Wiremold #4000) *(26 05 33 23-0157)*

Note: Available in gray enamel (G) or ivory (V).

26 05 33 23-0255	LF	4-3/4" x 1-3/4" Two Piece Surface Metal Raceway Base (Wiremold #4000B-10)	17.86	4.63
		For Concrete Or Masonry Surface, Add	*0.50*	
26 05 33 23-0256	LF	Raceway Cover (Wiremold #4000C)	6.62	0.51
26 05 33 23-0257	LF	Divider (Wiremold #4000D)	3.09	0.51
26 05 33 23-0258	EA	Wire Clips For Conductors (Wiremold #4000WC)	7.00	2.58
26 05 33 23-0259	EA	Couplings (Wiremold #4001A)	17.94	3.09
26 05 33 23-0260	EA	Divider Clip (Wiremold #4001D)	8.05	3.09
26 05 33 23-0261	EA	Seam Clip (Wiremold #4006)	8.22	3.09
26 05 33 23-0262	EA	Single Device Fitting (Wiremold #4007C-1R)	37.70	6.70
26 05 33 23-0263	EA	Blank End Fittings (Wiremold #4010B)	19.42	4.12
26 05 33 23-0264	EA	Entrance End Fitting (Wiremold #4010DFO)	74.57	15.87
26 05 33 23-0265	EA	Flat 90 Degree Elbow (Wiremold #4011)	70.18	12.89
26 05 33 23-0266	EA	Radiused Flat 90 Degree Elbow (Wiremold #4011FO)	83.96	12.89
26 05 33 23-0267	EA	Internal Or External 45 Degree Elbow (Wiremold #4012TX)	75.55	15.97
26 05 33 23-0268	EA	Wall Box Connector (Wiremold #4014A)	103.11	15.97
26 05 33 23-0269	EA	Tee Fitting (Wiremold #4015)	115.20	15.97
26 05 33 23-0270	EA	Divided Tee Fitting (Wiremold #4015D)	120.06	15.97
26 05 33 23-0271	EA	Radiused Full Capacity Divided Tee Fitting (Wiremold #4015DFO)	144.78	15.97
26 05 33 23-0272	EA	Radiused Tee Fitting (Wiremold #4015FO)	145.26	15.97
26 05 33 23-0273	EA	Internal Elbow (Wiremold #4017)	60.03	15.97
26 05 33 23-0274	EA	Internal Elbow (Wiremold #4017FO)	113.05	15.97
26 05 33 23-0275	EA	Inverted Internal Elbow (Wiremold #4017N)	67.32	15.97
26 05 33 23-0276	EA	Internal Corner Coupling (Wiremold #4017TCA)	56.17	15.97
26 05 33 23-0277	EA	External Elbow (Wiremold #4018)	93.15	15.97
26 05 33 23-0278	EA	Radiused External Elbow (Wiremold #4018FO)	109.27	15.97
26 05 33 23-0279	EA	Single Locking Receptacle And Two RJ11/45 Modulaular Connectors Outlet Cover (Wiremold #4046ARJ)	95.56	6.70
26 05 33 23-0280	EA	Double Duplex Receptacle Outlet Cover (Wiremold #4046B-2)	101.51	6.70
26 05 33 23-0281	EA	Duplex Receptacle And Two RJ11/45 Modular Connector Cover (Wiremold #4046DRJ)	101.51	6.70
26 05 33 23-0282	EA	Double Duplex Receptacle And Four RJ11/45 Modular Connector Cover (Wiremold #4046DRJ-2)	136.76	6.70
26 05 33 23-0283	EA	Tap-Off Fitting (Wiremold #4046H-2)	26.26	6.70
26 05 33 23-0284	EA	Combination Single Receptacle And Phone Outlet Center (Wiremold #4046JRJ)	88.35	3.09
26 05 33 23-0285	EA	Rectangular Receptacle And Two RJ11/45 Modular Connector Cover (Wiremold #4046RRJ)	103.98	6.70
26 05 33 23-0286	EA	1 Gang Device Plate (Wiremold #G4047C-1)	26.75	6.70
26 05 33 23-0287	EA	2 Gang Device Plate (Wiremold #G4047C-2)	31.62	6.70
26 05 33 23-0288	EA	Device Mounting Bracket (Wiremold #4050)	30.67	5.15
26 05 33 23-0289	EA	#4000 To #3000 Take-off Connector (Wiremold #4074A)	147.12	15.97
26 05 33 23-0290	EA	Bridge Fitting (Wiremold #4075D)	131.85	15.97
26 05 33 23-0291	EA	Bridge Fitting (Wiremold #4075DA)	131.85	15.97
26 05 33 23-0292	EA	Panel Connector (Wiremold #4086A)	97.97	30.40
26 05 33 23-0293	EA	Reducing Connector Fitting (Wiremold #4089)	61.55	15.97

26 05 33 23-0294 4-3/4" x 3-9/16" Two Piece Surface Metal Raceways (Wiremold #6000) *(26 05 33 23-0157)*

Note: Available in gray enamel (G) or ivory (V).

26 05 33 23-0295	LF	4-3/4" x 3-9/16" Two Piece Surface Metal Raceway Base (Wiremold #6000B-10)	26.48	5.67
		For Concrete Or Masonry Surface, Add	*0.57*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 23-0296	LF	Raceway Cover (Wiremold #6000C)	7.76	1.54
26 05 33 23-0297	LF	Divider (Wiremold #6000DA)	8.30	1.54
26 05 33 23-0298	EA	Wire Clips For Conductors (Wiremold #6000WC)	8.11	2.58
26 05 33 23-0299	EA	Couplings (Wiremold #6001A)	21.56	5.15
26 05 33 23-0300	EA	Divider Clip (Wiremold #6001D)	10.10	2.58
26 05 33 23-0301	EA	Converter Coupling (Wiremold #6001TX)	28.15	6.70
26 05 33 23-0302	EA	Connection Cover (Wiremold #6006)	26.58	6.70
26 05 33 23-0303	EA	Single Gang Device Plate (Wiremold #6007C-1)	28.01	6.70
26 05 33 23-0304	EA	Two Gang Device Plate (Wiremold #6007C-2)	30.92	6.70
26 05 33 23-0305	EA	C-Hanger (Wiremold #6008A)	44.92	9.79
26 05 33 23-0306	EA	Blank End Fittings (Wiremold #6010B)	46.41	15.46
26 05 33 23-0307	EA	Combination Flat Elbow (Wiremold #6011TX)	92.73	15.46
26 05 33 23-0308	EA	Internal-External 45 Degree Elbow (Wiremold #6012TX)	94.66	14.84
26 05 33 23-0309	EA	Connector Fitting (Wiremold #6014A)	137.25	15.97
26 05 33 23-0310	EA	Combination Internal-External Elbow (Wiremold #6017TX)	95.45	17.52
26 05 33 23-0311	EA	Circuit Breaker Housing (Wiremold #6046KD)	171.66	17.52
26 05 33 23-0312	EA	#6000 To #6000 Take-off Connector (Wiremold #6074)	166.25	15.46
26 05 33 23-0313	EA	#6000 To #4000 Take-off Connector (Wiremold #6074A)	180.40	15.46
26 05 33 23-0314	EA	Panel Connector (Wiremold #6086)	98.37	35.86

26 05 33 23-0315 Two Piece Surface Aluminum Raceways *(26 05 33 23-0056)*

Note: Exposed installations on masonry, concrete block or drywall walls or ceilings. (Wiremold or approved equal).

26 05 33 23-0316 1-7/16" x 1-1/8" Two Piece Surface Aluminum Raceways (Wiremold #AL2000) *(26 05 33 23-0315)*

26 05 33 23-0317	LF	1-7/16" x 1-1/8" Two Piece Surface Aluminum Raceway Base (Wiremold #AL2000B)	12.40	2.58
		For Concrete Or Masonry Surface, Add	*0.26*	
26 05 33 23-0318	LF	Aluminum Raceway Cover (Wiremold #AL2000C)	6.77	0.51
26 05 33 23-0319	EA	Wire Clip (Wiremold #AL2000WC)	5.78	2.07
26 05 33 23-0320	EA	Coupling (Wiremold #AL2001)	11.83	2.58
26 05 33 23-0321	EA	Supporting Clip (Wiremold #AL2003)	6.35	1.54
26 05 33 23-0322	EA	Cover Clip (Wiremold #AL2006)	8.38	1.54
26 05 33 23-0323	EA	Ground Clamp (Wiremold #AL2009)	11.71	2.58
26 05 33 23-0324	EA	Entrance End Fitting (Wiremold #AL2010A)	32.33	7.73
26 05 33 23-0325	EA	Blank End Fitting (Wiremold #AL2010B)	10.39	2.58
26 05 33 23-0326	EA	Flat 90 Degree Elbow (Wiremold #AL2011)	39.20	6.70
26 05 33 23-0327	EA	Tee (Wiremold #AL2015)	52.66	9.69
26 05 33 23-0328	EA	Internal Corner Elbow (Wiremold #AL2017)	36.21	5.15
26 05 33 23-0329	EA	External Corner Elbow (Wiremold #AL2018)	36.12	5.15
26 05 33 23-0330	EA	2 To 15 Amperes, In-Line Receptacle (Wiremold #AL2043)	57.63	10.20
26 05 33 23-0331	EA	4-13/16" Round Fixture Box (Wiremold #AL2038)	144.68	9.18
26 05 33 23-0332	EA	4-1/2" x 3" x 2-1/4" D Box (Wiremold #AL2044)	60.39	9.18
26 05 33 23-0333	EA	4-5/8" x 4-7/8" x 2-1/2" D Box (Wiremold #AL2044-2)	131.88	10.20
26 05 33 23-0334	EA	Single Gang Shallow Device Box (Wiremold #AL2047)	62.79	9.18
26 05 33 23-0335	EA	2-Gang Shallow Device Box (Wiremold #AL2047-2)	115.67	10.20
26 05 33 23-0336	EA	Flush Plate Adapter (Wiremold #AL2051H)	45.06	10.20

26 05 33 23-0337 2" x 1-9/32" Two Piece Surface Aluminum Raceways (Wiremold #AL2400)

(26 05 33 23-0315)

26 05 33 23-0338	LF	2" x 1-9/32" Two Piece Surface Aluminum Raceway Base (Wiremold #AL2400B)	13.91	2.58
		For Concrete Or Masonry Surface, Add	*0.26*	
26 05 33 23-0339	LF	Aluminum Raceway Cover (Wiremold #AL2400C)	6.84	0.51
26 05 33 23-0340	EA	Wire Clip (Wiremold #AL2400WC)	8.21	2.07
26 05 33 23-0341	EA	Coupling (Wiremold #AL2401)	14.13	2.58
26 05 33 23-0342	EA	Cover Clip (Wiremold #AL2406)	11.02	1.54
26 05 33 23-0343	EA	Ground Clamp (Wiremold #AL2409)	9.56	2.07
26 05 33 23-0344	EA	Blank End (Wiremold #AL2410B)	11.55	2.58
26 05 33 23-0345	EA	End Fitting (Wiremold #AL2410B2)	23.23	7.73
26 05 33 23-0346	EA	Flat 90 Degree Elbow (Wiremold #AL2411)	46.80	7.73
26 05 33 23-0347	EA	Tee (Wiremold #AL2415)	51.56	7.62
26 05 33 23-0348	EA	Fourway Fitting (Wiremold #AL2416)	61.51	7.62
26 05 33 23-0349	EA	Internal Coupling (Wiremold #AL2417)	46.65	7.62
26 05 33 23-0350	EA	External Coupling (Wiremold #AL2418)	50.64	7.62
26 05 33 23-0351	EA	4-1/2" x 4-1/2" Back Feed Fitting (Wiremold #AL2451H)	41.19	7.73

26 05 33 23-0352 2-7/8" x 1-7/8" Two Piece Surface Aluminum Raceways (Wiremold #AL3300) *(26 05 33 23-0315)*

26 05 33 23-0353	LF	2-7/8" x 1-7/8" Two Piece Surface Aluminum Raceway Base (Wiremold #AL3300B)	25.67	4.63
		For Concrete Or Masonry Surface, Add	*0.46*	
26 05 33 23-0354	LF	Aluminum Raceway Cover (Wiremold #AL3300CE)	8.47	0.51
26 05 33 23-0355	LF	Raceway Divider (Wiremold #AL3300D)	6.89	4.63
26 05 33 23-0356	EA	Wire Clips For Conductors (Wiremold #AL3300WC)	12.88	2.07
26 05 33 23-0357	EA	Couplings (Wiremold #AL3301)	21.49	2.07
26 05 33 23-0358	EA	Divider Coupling (Wiremold #AL3301D)	19.25	2.58
26 05 33 23-0359	EA	Ground Clamp (Wiremold #AL3309)	12.59	2.07
26 05 33 23-0360	EA	Blank End Fittings (Wiremold #AL3310B)	26.36	4.12
26 05 33 23-0361	EA	End Fitting (Wiremold #AL3310B1)	39.54	9.79

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 23-0362	EA	Flat 90 Degree Elbow (Wiremold #AL3311) Note: Includes two (2) AL3301 couplings.	138.39	12.77
26 05 33 23-0363	EA	Tee Fitting (Wiremold #AL3315) Note: Includes three (3) AL3301 couplings.	157.31	15.97
26 05 33 23-0364	EA	Cross Fitting (Wiremold #AL3316) Note: Includes four (4) AL3301 couplings.	180.15	15.97
26 05 33 23-0365	EA	Internal Elbow (Wiremold #AL3317) Note: Includes two (2) AL3301 couplings.	131.99	9.79
26 05 33 23-0366	EA	External Elbow (Wiremold #AL3318) Note: Includes two (2) AL3301 couplings.	132.14	9.79
26 05 33 23-0367	EA	Duplex Receptacle Cover (Wiremold #AL3346D)	28.31	3.09
26 05 33 23-0368	EA	Single Receptacle Cover (Wiremold #AL3346E)	28.11	3.09
26 05 33 23-0369	EA	GFCI/Surge Receptacle Cover (Wiremold #AL3346G)	27.78	3.09
26 05 33 23-0370	EA	Single Device Cover Plate (Wiremold #AL3356R)	28.35	2.58
26 05 33 23-0371		**5" x 2" Two Piece Surface Aluminum Raceways (Wiremold #AL5200)** *(26 05 33 23-0315)*		
26 05 33 23-0372	LF	5" x 2" Two Piece Surface Aluminum Raceway Base (Wiremold #AL5200B-10)	31.12	4.63
		For Concrete Or Masonry Surface, Add	*0.50*	
26 05 33 23-0373	LF	Aluminum Raceway Cover (Wiremold #AL5200C)	13.72	0.51
26 05 33 23-0374	LF	Divider (Wiremold #AL5200D)	7.88	0.51
26 05 33 23-0375	EA	Wire Clips For Conductors (Wiremold #AL5200WC)	10.39	2.58
26 05 33 23-0376	EA	Wire Clips For Conductors (Wiremold #AL5200WC2)	8.50	2.58
26 05 33 23-0377	EA	Wire Clips For Conductors (Wiremold #AL5200WC3)	8.44	2.58
26 05 33 23-0378	EA	Couplings (Wiremold #AL5201)	18.91	3.09
26 05 33 23-0379	EA	Cover Clip (Wiremold #AL5206)	17.64	3.09
26 05 33 23-0380	EA	Ground Adapter (Wiremold #AL5209)	21.27	3.09
26 05 33 23-0381	EA	Blank End Fittings (Wiremold #AL5210B)	23.12	4.12
26 05 33 23-0382	EA	Blank End Fittings (Wiremold #AL5210B1)	25.08	4.12
26 05 33 23-0383	EA	Blank End Fittings (Wiremold #AL5210B2)	25.51	4.12
26 05 33 23-0384	EA	Blank End Fittings (Wiremold #AL5210B3)	24.62	4.12
26 05 33 23-0385	EA	Flat 90 Degree Elbow (Wiemold #AL5211) Note: Includes two (2) pairs of AL5201 couplings.	136.16	12.89
26 05 33 23-0386	EA	Wall Box Connector (Wiremold #AL5214)	102.02	15.97
26 05 33 23-0387	EA	Tee Fitting (Wiremold #AL5215) Note: Includes three (3) pairs of AL5201 couplings.	158.56	15.97
26 05 33 23-0388	EA	Four Way Fitting (Wiremold #AL5216) Note: Includes four (4) pairs of AL5201 couplings.	175.29	15.97
26 05 33 23-0389	EA	Internal Elbow (Wiremold #AL5217) Note: Includes two (2) pairs of AL5201 couplings.	139.08	15.97
26 05 33 23-0390	EA	Internal Corner Coupling (Wiremold #AL5217A)	51.00	15.97
26 05 33 23-0391	EA	Inverted Internal Elbow (Wiremold #AL5217N)	143.34	15.97
26 05 33 23-0392	EA	External Elbow (Wiremold #AL5218) Note: Includes two (2) pairs of AL5201 couplings.	140.41	15.97
26 05 33 23-0393	EA	Blank Device Cover Plate (Wiremold #AL5246B)	30.39	3.09
26 05 33 23-0394	EA	Receptacle Device Cover Plate (Wiremold #AL5246D)	36.52	3.09
26 05 33 23-0395	EA	Double Receptacle Device Cover Plate (Wiremold #AL5246DD)	43.84	3.09
26 05 33 23-0396	EA	Device Cover Plate (Wiremold #AL5246F)	40.95	3.09
26 05 33 23-0397	EA	Device Cover Plate (Wiremold #AL5246G)	37.61	3.09
26 05 33 23-0398	EA	Offset Divider (Wiremold #AL5260)	33.28	6.70
26 05 33 23-0399		**3" x 2-1/4" Two Piece Surface Aluminum Raceways (Wiremold #ALA3800)** *(26 05 33 23-0315)*		
26 05 33 23-0400	LF	Single Channel, 3" x 2-1/4" Two Piece Surface Aluminum Raceway Base (Wiremold #ALA3800B-10)	27.97	4.63
26 05 33 23-0401	EA	Cover Clip (Wiremold #ALA3806)	12.66	3.09
26 05 33 23-0402	EA	Blank End Fittings (Wiremold #ALA3810B)	23.51	4.12
26 05 33 23-0403	EA	Entrance End Cap Fittings (Wiremold #ALA3810B1)	25.57	4.12
26 05 33 23-0404	EA	Flat 90 Degree Elbow (Wiremold #ALA3811) Note: Includes two (2) ALA01 couplings.	139.34	12.89
26 05 33 23-0405	EA	Flat Tee Fitting (Wiremold #ALA3815) Note: Includes three (3) ALA01 couplings.	141.07	15.97
26 05 33 23-0406	EA	Internal Elbow (Wiremold #ALA3817) Note: Includes two (2) ALA01 couplings.	137.14	15.97
26 05 33 23-0407	EA	Inverted Internal Elbow (Wiremold #ALA3817N) Note: Includes two (2) ALA01 couplings.	164.27	15.97
26 05 33 23-0408	EA	External Elbow (Wiremold #ALA3818) Note: Includes two (2) ALA01 couplings.	139.16	15.97
26 05 33 23-0409		**6" x 2-1/4" Two Piece Surface Aluminum Raceways (Wiremold #ALA4800)** *(26 05 33 23-0315)*		
26 05 33 23-0410	LF	Two Channel, 6" x 2-1/4" Two Piece Surface Aluminum Raceway Base (Wiremold #ALA4800B-10)	46.66	4.63
26 05 33 23-0411	EA	Cover Clip (Wiremold #ALA4806)	19.23	3.09
26 05 33 23-0412	EA	Blank End Fittings (Wiremold #ALA4810B)	25.09	4.12
26 05 33 23-0413	EA	Entrance End Cap Fittings (Wiremold #ALA4810B2)	28.42	4.12
26 05 33 23-0414	EA	Flat 90 Degree Elbow (Wiremold #ALA4811) Note: Includes four (4) ALA01 couplings.	177.97	12.89
26 05 33 23-0415	EA	Flat Tee Fitting (Wiremold #ALA4815) Note: Includes six (6) ALA01 couplings.	245.33	15.97
26 05 33 23-0416	EA	Internal Elbow (Wiremold #ALA4817) Note: Includes four (4) ALA01 couplings.	160.24	15.97

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 23-0417	EA	Inverted Internal Elbow (Wiremold #ALA4817N) Note: Includes four (4) ALA01 couplings.	191.59	15.97
26 05 33 23-0418	EA	External Elbow (Wiremold #ALA4818) Note: Includes four (4) ALA01 couplings.	169.06	15.97
26 05 33 23-0419		**Two Piece Surface Aluminum Raceways Fittings (Wiremold #ALA3800 And #ALA4800)** *(26 05 33 23-0315)* See CSI section 26 27 26 00-0010 for receptacles.		
26 05 33 23-0420	LF	3" Wide Aluminum Raceway Cover (Wiremold #ALAC-5) Note: For use with ALA3800 single channel raceway and ALA4800 dual channel raceway.	10.12	0.51
26 05 33 23-0421	EA	Wire Clips (Wiremold #ALAWC)	8.47	2.58
26 05 33 23-0422	EA	Slide Couplings (Wiremold #ALA01)	20.43	3.09
26 05 33 23-0423	EA	Grounding Adapter (Wiremold #ALA09)	16.74	3.09
26 05 33 23-0424	EA	Bend Radius Control Insert For Flat Elbow (Wiremold #ALA11RI)	45.25	12.89
26 05 33 23-0425	EA	Internal Corner Coupling (Wiremold #ALA17A)	53.36	15.97
26 05 33 23-0426	EA	Bend Radius Control Insert For Internal And External Elbow (Wiremold #ALA17/18RI)	51.88	12.89
26 05 33 23-0427	EA	Blank Cover Plate (Wiremold #ALA-BL)	24.02	3.09
26 05 33 23-0428	EA	Duplex Receptacle Cover Plate (Wiremold #ALA-DR)	25.83	3.09
26 05 33 23-0429	EA	Single Receptacle Cover Plate, 1.40" Diameter Opening (Wiremold #ALA-E)	27.03	3.09
26 05 33 23-0430	EA	Single Receptacle Cover Plate, 1.59" Diameter Opening (Wiremold #ALA-F)	26.62	3.09
26 05 33 23-0431	EA	GFCI/Surge/Decorator Cover Plate (Wiremold #ALA-G)	26.07	3.09
26 05 33 23-0432	EA	Single Receptacle Cover Plate, 2.13" Diameter Opening (Wiremold #ALA-J)	27.05	3.09
26 05 33 23-0433	EA	Toggle Switch Cover Plate (Wiremold #ALA-N)	27.83	3.09
26 05 33 23-0434	EA	Active LPB Cover Plate (Wiremold #ALA-LPB)	36.61	3.09
26 05 33 23-0435	EA	Active MAB Cover Plate (Wiremold #ALA-MAB)	34.22	3.09
26 05 33 23-0436	EA	Ortronics Cover Plate (Wiremold #ALA-MABRT)	39.94	3.09
26 05 33 23-0437	EA	1-3/4" x 2-3/4" Cover Plate (Wiremold #ALA-SG)	25.32	3.09
26 05 33 23-0438	EA	Active 2A Cover Plate (Wiremold #ALA-2A)	38.47	3.09
26 05 33 23-0439	EA	Ortronics Communications Cover Plate (Wiremold #ALA-ABRT)	34.93	3.09
26 05 33 23-0440	EA	3/4" Grommet/Mousehole Cover Plate (Wiremold #ALA-Z)	27.76	3.09
26 05 33 23-0441	EA	Ortronics Low Profile Cover Plate (Wiremold #ALA-LPB3S2)	35.27	3.09
26 05 33 23-0442		**Surface Non-Metallic Raceways** *(26 05 33 23-0001)* Note: Exposed on flat wall surface.		
26 05 33 23-0443		**One Piece Surface Non-Metallic Raceways** *(26 05 33 23-0442)* Note: Exposed on flat wall surface. (Wiremold or approved equal).		
26 05 33 23-0444		**7/8" x 7/16" One Piece Surface Non-Metallic Raceways (Wiremold #400)** *(26 05 33 23-0443)*		
26 05 33 23-0445	LF	7/8" x 7/16" One Piece Surface Non-Metallic Raceway Base And Cover (Wiremold #400BAC)	6.17	2.07
		For Concrete Or Masonry Surface, Add	*0.21*	
26 05 33 23-0446	EA	Wire Clip (Wiremold #400WC)	4.55	2.07
26 05 33 23-0447	EA	Cover Clip (Wiremold #406)	4.83	2.07
26 05 33 23-0448	EA	Blank End Clip (Wiremold #410B)	9.25	4.12
26 05 33 23-0449	EA	Flat 90 Degree Elbow (Wiremold #411)	10.95	4.12
26 05 33 23-0450	EA	Tee (Wiremold #415)	13.80	5.15
26 05 33 23-0451	EA	Internal Elbow (Wiremold #417)	10.73	4.12
26 05 33 23-0452	EA	External Elbow (Wiremold #418)	10.73	4.12
26 05 33 23-0453		**1-5/16" x 7/16" One Piece Surface Non-Metallic Raceways (Wiremold #800)** *(26 05 33 23-0443)*		
26 05 33 23-0454	LF	1-5/16" x 7/16" One Piece Surface Non-Metallic Raceway Base And Cover (Wiremold #800BAC)	7.23	2.07
		For Concrete Or Masonry Surface, Add	*0.21*	
26 05 33 23-0455	EA	Wire Clip (Wiremold #800WC)	4.64	2.07
26 05 33 23-0456	EA	Cover Clip (Wiremold #806)	4.75	2.07
26 05 33 23-0457	EA	Entrance End Fitting (Wiremold #810A2)	15.15	4.12
26 05 33 23-0458	EA	Blank End Fitting (Wiremold #810B)	9.36	4.12
26 05 33 23-0459	EA	Flat 90 Degree Elbow (Wiremold #811)	11.04	4.12
26 05 33 23-0460	EA	Tee (Wiremold #815)	13.88	5.15
26 05 33 23-0461	EA	Internal Elbow (Wiremold #817)	10.79	4.12
26 05 33 23-0462	EA	External Elbow (Wiremold #818)	10.79	4.12
26 05 33 23-0463	EA	End Reducer, #800 To #400 (Wiremold #889A)	12.37	4.12
26 05 33 23-0464		**2-1/4" x 11/16" One Piece Surface Non-Metallic Raceways (Wiremold #2300)** *(26 05 33 23-0443)*		
26 05 33 23-0465	LF	2-1/4" x 11/16" One Piece Surface Non-Metallic Raceway Base And Cover (Wiremold #2300BAC)	8.44	2.07
		For Concrete Or Masonry Surface, Add	*0.21*	
26 05 33 23-0466	LF	2-1/4" x 11/16" One Piece Surface Non-Metallic Divided Raceway Base And Cover (Wiremold #2300BACD)	9.03	2.07
		For Concrete Or Masonry Surface, Add	*0.21*	
26 05 33 23-0467	EA	Wire Clip (Wiremold #2300WC)	4.90	2.07
26 05 33 23-0468	EA	Cover Clip (Wiremold #2306)	5.20	2.07
26 05 33 23-0469	EA	Entrance End Fitting (Wiremold #2310A)	16.58	4.12
26 05 33 23-0470	EA	Blank End Fitting (Wiremold #2310B)	9.93	4.12
26 05 33 23-0471	EA	Divided Entrance End Fitting (Wiremold #2310DFO)	18.85	4.12
26 05 33 23-0472	EA	Flat 90 Degree Elbow (Wiremold #2311)	11.27	4.12
26 05 33 23-0473	EA	Divided Flat 90 Degree Elbow (Wiremold #2311DFO)	12.23	4.12
26 05 33 23-0474	EA	Tee (Wiremold #2315)	14.02	5.15

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 23-0475	EA	Internal Elbow (Wiremold #2317)	11.27	4.12
26 05 33 23-0476	EA	Divided Internal Elbow (Wiremold #2317DFO)	12.25	4.12
26 05 33 23-0477	EA	External Elbow (Wiremold #2318)	11.30	4.12
26 05 33 23-0478	EA	Divided External Elbow (Wiremold #2318DFO)	12.42	4.12
26 05 33 23-0479	EA	End Reducer, #2300 To #400 (Wiremold #2389)	12.43	4.12
26 05 33 23-0480	EA	End Reducer, #2300 To #800 (Wiremold #2389A)	13.05	4.12
26 05 33 23-0481		One Piece Surface Non-Metallic Raceway Fittings (Wiremold #400, #800 Or #2300) *(26 05 33 23-0443)*		
26 05 33 23-0482	EA	Blank Cover, 4-1/2" Diameter (Wiremold #2336)	14.22	3.61
26 05 33 23-0483	EA	Extension Box, 5-1/2" Diameter (Wiremold #2337A)	24.01	4.12
26 05 33 23-0484	EA	-A Fixture Box, 5-1/2" Diameter (Wiremold #233)	24.15	4.12
26 05 33 23-0485	EA	Extra Deep Device Box, 1 Gang, 2-3/4" Deep x 4-3/4" Long x 3" Wide (Wiremold #2344)	21.64	4.12
26 05 33 23-0486	EA	Extra Deep Device Box, 2 Gang, 2-3/4" Deep x 4-3/4" Long x 4-7/8" Wide (Wiremold #2344-2)	25.33	4.12
26 05 33 23-0487	EA	Extra Deep Divided Device Box, 1 Gang, 2-3/4" Deep x 4-3/4" Long x 3" Wide (Wiremold #2344D)	23.72	4.12
26 05 33 23-0488	EA	Deep Divided Device Box, 2 Gang, 2-1/4" Deep x 4-3/4" Long x 4-7/8" Wide (Wiremold #2344SD-2A)	25.91	4.12
26 05 33 23-0489	EA	1-Gang Standard Device Box, 1-3/8" Deep x 4-3/4" Long x 3" Wide (Wiremold #2347)	20.61	6.70
26 05 33 23-0490	EA	2-Gang Standard Device Box, 1-3/8" Deep x 4-3/4" Long x 4-7/8" Wide (Wiremold #2347-2)	23.86	6.70
26 05 33 23-0491	EA	1-Gang Deep Device Box, 1-3/4" Deep x 4-3/4" Long x 3" Wide (Wiremold #2348)	21.56	6.70
26 05 33 23-0492	EA	2-Gang Deep Device Box, 1-3/4" Deep x 4-3/4" Long x 4-7/8" Wide (Wiremold #2348-2)	26.46	6.70
26 05 33 23-0493	EA	3-Gang Deep Device Box, 1-3/4" Deep x 5" Long x 7" Wide (Wiremold #2348-3)	32.14	6.70
26 05 33 23-0494	EA	1-Gang Deep Device Box With Magnetic Backing, 1-3/4" Deep x 4-3/4" Long x 3" Wide (Wiremold #2348AMP)	30.33	6.70
26 05 33 23-0495	EA	1-Gang Divided Deep Device Box, 1-3/4" Deep x 4-3/4" Long x 3" Wide (Wiremold #2348D)	27.23	6.70
26 05 33 23-0496	EA	Shallow Device And Extension Box, 7/8" Deep x 4-3/4" Long x 3" Wide (Wiremold #2348S/51)	20.12	6.70
26 05 33 23-0497		3/4" x 3/8" One Piece Surface Non-Metallic Raceways (Wiremold #2700) *(26 05 33 23-0443)*		
26 05 33 23-0498	LF	3/4" x 3/8" One Piece Surface Non-Metallic Raceway Base And Cover (Wiremold #2700)	5.72	2.07
		For Concrete Or Masonry Surface, Add	*0.21*	
26 05 33 23-0499	EA	3/4" Wire Clip (Wiremold #2700WC)	2.41	1.03
26 05 33 23-0500	EA	Cover Clip (Wiremold #2706)	3.76	1.03
26 05 33 23-0501	EA	Blank End (Wiremold #2710B)	5.80	2.07
26 05 33 23-0502	EA	Flat 90 Degree Elbow (Wiremold #2711)	6.87	2.58
26 05 33 23-0503	EA	Tee (Wiremold #2715)	11.02	4.63
26 05 33 23-0504	EA	Internal Elbow (Wiremold #2717)	7.91	3.09
26 05 33 23-0505	EA	External Elbow (Wiremold #2718)	7.90	3.09
26 05 33 23-0506	EA	Drop Ceiling Connector (Wiremold #2786)	9.33	3.61
26 05 33 23-0507		1" x 1/2" One Piece Surface Non-Metallic Raceways (Wiremold #2800) *(26 05 33 23-0443)*		
26 05 33 23-0508	LF	1" x 1/2" One Piece Surface Non-Metallic Raceway Base And Cover (Wiremold #2800)	7.47	2.58
		For Concrete Or Masonry Surface, Add	*0.26*	
26 05 33 23-0509	EA	1" Wire Clip (Wiremold #2800WC)	3.59	1.54
26 05 33 23-0510	EA	Cover Clip (Wiremold #2806)	4.97	1.54
26 05 33 23-0511	EA	Blank End (Wiremold #2810B)	7.03	2.58
26 05 33 23-0512	EA	Flat 90 Degree Elbow (Wiremold #2811)	9.18	3.61
26 05 33 23-0513	EA	Radiused Flat 90 Degree Elbow (Wiremold #2811FO)	9.85	3.61
26 05 33 23-0514	EA	Tee (Wiremold #2815)	13.30	5.67
26 05 33 23-0515	EA	Internal Elbow (Wiremold #2817)	10.18	4.12
26 05 33 23-0516	EA	External Elbow (Wiremold #2818)	10.21	4.12
26 05 33 23-0517	EA	Radiused Tee (Wiremold #2815FO)	14.21	5.67
26 05 33 23-0518	EA	Radiused Internal Elbow (Wiremold #2817FO)	11.00	4.12
26 05 33 23-0519	EA	Radiused External Elbow (Wiremold #2818FO)	10.88	4.12
26 05 33 23-0520	EA	Drop Ceiling Connector (Wiremold #2886)	11.50	4.63
26 05 33 23-0521	EA	Reducer, #2800 To #2700 (Wiremold #2889)	10.37	4.12
26 05 33 23-0522		1-1/2" x 3/4" One Piece Surface Non-Metallic Raceways (Wiremold #2900) *(26 05 33 23-0443)*		
26 05 33 23-0523	LF	1-1/2" x 3/4" One Piece Surface Non-Metallic Raceway Base And Cover (Wiremold #2900)	9.11	3.09
		For Concrete Or Masonry Surface, Add	*0.31*	
26 05 33 23-0524	EA	1-1/2" Wire Clip (Wiremold #2900WC)	4.74	2.07
26 05 33 23-0525	EA	Cover Clip (Wiremold #2906)	6.14	2.07
26 05 33 23-0526	EA	Blank End (Wiremold #2910B)	8.21	3.09
26 05 33 23-0527	EA	Flat 90 Degree Elbow (Wiremold #2911)	10.28	4.12
26 05 33 23-0528	EA	Radiused Flat 90 Degree Elbow (Wiremold #2911FO)	11.35	4.12
26 05 33 23-0529	EA	Tee (Wiremold #2915)	14.40	6.19
26 05 33 23-0530	EA	Radiused Tee (Wiremold #2915FO)	15.49	6.19
26 05 33 23-0531	EA	Radiused External Elbow (Wiremold #2918FO)	12.74	4.63
26 05 33 23-0532	EA	Internal Elbow (Wiremold #2917)	11.32	4.63
26 05 33 23-0533	EA	Radiused Internal Elbow (Wiremold #2917FO)	12.43	4.63
26 05 33 23-0534	EA	External Elbow (Wiremold #2918)	11.30	4.63
26 05 33 23-0535	EA	Drop Ceiling Connector (Wiremold #2986)	11.49	4.63
26 05 33 23-0536	EA	Reducer, #2900 To #2800 (Wiremold #2989)	12.77	5.15
26 05 33 23-0537	EA	Reducer, #2900 To #2700 (Wiremold #2989A)	12.40	5.15
26 05 33 23-0538		Two Piece Surface Non-Metallic Raceways *(26 05 33 23-0442)*		
		Note: Exposed on flat wall surface. (Wiremold or approved equal).		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 23-0539		**5" x 1" Two Piece Surface Non-Metallic Raceways (Wiremold #500)** *(26 05 33 23-0538)*		
26 05 33 23-0540	LF	5" x 1" Two Piece Surface Non-Metallic Raceway Base (Wiremold #5000B)	14.06	4.63
		For Concrete Or Masonry Surface, Add	*0.46*	
26 05 33 23-0541	LF	Black, Gray Or White, Cover (Wiremold #5000C)	13.33	4.63
26 05 33 23-0542	LF	Oak Veneer, Cover (Wiremold #5000COA)	25.74	4.63
26 05 33 23-0543	LF	Maple Wood Veneer, Cover (Wiremold #5000CW)	20.84	4.63
26 05 33 23-0544	LF	Black, Gray Or White, Quarter Round Trim (Wiremold #5000T)	1.91	0.51
26 05 33 23-0545	LF	Oak Veneer, Quarter Round Trim (Wiremold #5000TOA)	8.13	0.51
26 05 33 23-0546	LF	Maple Wood Veneer, Quarter Round Trim (Wiremold #5000TW)	5.02	0.51
26 05 33 23-0547	EA	Base Coupling (Wiremold #5001)	12.83	5.15
26 05 33 23-0548	EA	Blank/Coax Adapter (Wiremold #5004)	7.24	2.58
26 05 33 23-0549	EA	Low Voltage Blank Plate (Wiremold #5005)	9.74	3.09
26 05 33 23-0550	EA	Cover Clip (Wiremold #5006)	13.87	5.15
26 05 33 23-0551	EA	Internal Wire Guard (Wiremold #5006A)	12.92	5.15
26 05 33 23-0552	EA	Device Bracket (Wiremold #5007C)	14.87	5.15
26 05 33 23-0553	EA	Device Plate (Wiremold #5007C-1)	26.77	10.31
26 05 33 23-0554	EA	Deep Device Plate (Wiremold #5007C-2)	27.77	10.31
26 05 33 23-0555	EA	Right Or Left End Cap (Wiremold #5010)	23.19	9.79
26 05 33 23-0556	EA	Entrance End Feed (Wiremold #5010A)	45.48	15.97
26 05 33 23-0557	EA	Internal Base Elbow (Wiremold #5017B)	31.29	12.89
26 05 33 23-0558	EA	Internal Cover Elbow (Wiremold #5017C)	28.43	10.31
26 05 33 23-0559	EA	Internal Elbow Wire Guard (Wiremold #5017WG)	19.38	7.73
26 05 33 23-0560	EA	External Base Elbow (Wiremold #5018B)	31.22	12.89
26 05 33 23-0561	EA	External Cover Elbow (Wiremold #5018C)	28.70	10.31
26 05 33 23-0562	EA	External Elbow Wire Guard (Wiremold #5018WG)	12.66	5.15
26 05 33 23-0563		**5-1/4" x 1-11/16" Two Piece Surface Non-Metallic Raceways (Wiremold #5400)** *(26 05 33 23-0538)*		
26 05 33 23-0564	LF	5-1/4" x 1-11/16", Two Compartment, Two Piece Surface Non-Metallic Raceway Base (Wiremold #5400TB)	16.10	4.63
		For Concrete Or Masonry Surface, Add	*0.46*	
26 05 33 23-0565	LF	Full Width Cover (Wiremold #5400C)	6.03	0.51
26 05 33 23-0566	LF	Twin Snap Cover (Wiremold #5400TC)	3.81	0.51
26 05 33 23-0567	EA	Twin Snap Cover Wire Clips (Wiremold #5400TWC)	5.88	2.58
26 05 33 23-0568	EA	Cover Clip (Wiremold #5406A)	10.43	3.09
26 05 33 23-0569	EA	Twin Cover Clip (Wiremold #5406T)	8.59	3.09
26 05 33 23-0570	EA	Base Seam Clip (Wiremold #5406TB)	7.55	3.09
26 05 33 23-0571	EA	L Or R (Left Or Right) Transition Fitting (Wiremold #5408)	60.07	15.97
26 05 33 23-0572	EA	End Cap (Wiremold #5410)	28.57	9.79
26 05 33 23-0573	EA	Radiused Divided Entrance Cap Fitting (Wiremold #5410DFO)	57.44	15.97
26 05 33 23-0574	EA	Radiused Flat 90 Degree Elbow (Wiremold #5411FO)	53.04	12.89
26 05 33 23-0575	EA	Tee Fitting (Wiremold #5415)	60.72	15.97
26 05 33 23-0576	EA	Radiused Tee Fitting (Wiremold #5415FO)	63.89	15.97
26 05 33 23-0577	EA	Radiused Internal Elbow (Wiremold #5417FO)	49.10	15.97
26 05 33 23-0578	EA	External Elbow (Wiremold #5418)	49.90	15.97
26 05 33 23-0579	EA	Radiused External Elbow (Wiremold #5418FO)	50.63	15.97
26 05 33 23-0580	EA	5-5/32" x 6" Device Bracket (Wiremold #5450)	24.83	5.15
26 05 33 23-0581	EA	7-19/32" x 7-1/2" Device Bracket (Wiremold #5450A3)	33.47	5.15
26 05 33 23-0582	EA	2-1/2" x 4-7/8" Twin Snap Device Bracket (Wiremold #5450T)	18.45	5.15
26 05 33 23-0583	EA	Transition Fitting (Wiremold #5474)	52.12	15.97
26 05 33 23-0584		**6-11/16" x 1-11/16" Two Piece Surface Non-Metallic Raceways (Wiremold #5500)** *(26 05 33 23-0538)*		
26 05 33 23-0585	LF	6-11/16" x 1-11/16", Three Compartment Divided, Two Piece Surface Non-Metallic Raceway Base (Wiremold #5500BD3)	19.60	4.63
		For Concrete Or Masonry Surface, Add	*0.46*	
26 05 33 23-0586	LF	Cover (Wiremold #5500C)	7.36	0.51
26 05 33 23-0587	EA	Wire Clips (Wiremold #5500WC)	6.86	2.58
26 05 33 23-0588	EA	Cover Clip (Wiremold #5506)	11.37	3.09
26 05 33 23-0589	EA	Base Seam Clip Fitting (Wiremold #5506B)	7.87	3.09
26 05 33 23-0590	EA	Modular Furniture Adapter (Wiremold #5507AD)	10.56	3.09
26 05 33 23-0591	EA	Blank Faceplate (Wiremold #5507B)	10.60	3.09
26 05 33 23-0592	EA	Duplex Receptacle Faceplate (Wiremold #5507D)	10.66	3.09
26 05 33 23-0593	EA	Dual RJ Connector Faceplate (Wiremold #5507FRJ)	10.66	3.09
26 05 33 23-0594	EA	Rectangular Receptacle Faceplate (Wiremold #5507R)	10.54	3.09
26 05 33 23-0595	EA	Dual RJ Connector Faceplate (Wiremold #5507RJ)	10.57	3.09
26 05 33 23-0596	EA	Rectangular Spacer Fitting (Wiremold #5507S)	10.49	3.09
26 05 33 23-0597	EA	Switch Faceplate (Wiremold #5507SW)	10.51	3.09
26 05 33 23-0598	EA	Twistlock Faceplate (Wiremold #5507T1)	10.60	3.09
26 05 33 23-0599	EA	Single Receptacle Faceplate (Wiremold #5507T2)	10.37	3.09
26 05 33 23-0600	EA	6-5/8" x 6" Device Bracket (Wiremold #5550)	28.33	5.15
26 05 33 23-0601	EA	9-5/8" x 7-1/2" Device Bracket (Wiremold #5550A4)	38.47	5.15
26 05 33 23-0602	EA	End Cap (Wiremold #5510)	30.32	9.79
26 05 33 23-0603	EA	Entrance End Fitting (Wiremold #5510D)	63.25	15.97
26 05 33 23-0604	EA	Radiused Flat 90 Degree Elbow (Wiremold #5511FO)	58.07	12.89
26 05 33 23-0605	EA	Backfeed Connector (Wiremold #5514A)	46.10	12.89
26 05 33 23-0606	EA	Tee Fitting (Wiremold #5515)	66.63	15.97
26 05 33 23-0607	EA	Radiused Internal Elbow (Wiremold #5517FO)	52.75	15.97

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 33 23-0608	EA	External Elbow (Wiremold #5518)	54.14	15.97
26 05 33 23-0609	EA	Radiused External Elbow (Wiremold #5518FO)	57.06	15.97
26 05 33 23-0610	EA	Transition Fitting (Wiremold #5574)	51.36	15.97
26 05 33 23-0611	EA	Transition Fitting (Wiremold #5574A)	70.31	15.97
26 05 33 23-0612		Hellermann Tyton Non-Metallic Low Voltage Raceways *(26 05 33 23-0442)*		
		Note: Exposed on flat wall surface.		
26 05 33 23-0613		1-1/4" x 3/4", Non-Metallic Low Voltage Raceways *(26 05 33 23-0612)*		
26 05 33 23-0614	LF	1-1/4" x 3/4", Non-Metallic Low Voltage Raceway (Hellermann Tyton TSR2)	5.74	2.58
26 05 33 23-0615	EA	Splice For 1-1/4" Non-Metallic Low Voltage Raceway (Hellermann Tyton TSR2X-14)	6.98	1.54
26 05 33 23-0616	EA	Tee For 1-1/4" Non-Metallic Low Voltage Raceway (Hellermann Tyton TSR2X-21-1)	15.63	5.67
26 05 33 23-0617	EA	Flat 90 Degree Elbow For 1-1/4" Non-Metallic Low Voltage Raceway (Hellermann Tyton TSR2X-25-1)	11.51	3.61
26 05 33 23-0618	EA	Internal Elbow For 1-1/4" Non-Metallic Low Voltage Raceway (Hellermann Tyton TSR2X-36)	12.13	4.12
26 05 33 23-0619	EA	External Elbow For 1-1/4" Non-Metallic Low Voltage Raceway (Hellermann Tyton TSR2X-29-1)	15.94	4.12
26 05 33 23-0620	EA	End Cap For 1-1/4" Non-Metallic Low Voltage Raceway (Hellermann Tyton TSR2X-36)	9.04	2.58
26 05 33 23-0621	EA	Drop Ceiling Connector For 1-1/4" Non-Metallic Low Voltage Raceway (Hellermann Tyton TSR2X-50)	15.62	4.63
26 05 33 23-0622		1-3/4" x 1", Non-Metallic Low Voltage Raceways *(26 05 33 23-0612)*		
26 05 33 23-0623	LF	1-3/4" x 1", Non-Metallic Low Voltage Raceway (Hellermann Tyton TSR3)	7.03	3.09
26 05 33 23-0624	EA	Splice For 1-3/4" Non-Metallic Low Voltage Raceway (Hellermann Tyton TSR3X-14)	8.37	2.07
26 05 33 23-0625	EA	Tee For 1-3/4" Non-Metallic Low Voltage Raceway (Hellermann Tyton TSR3X-21-1)	17.02	6.19
26 05 33 23-0626	EA	Flat 90 Degree Elbow For 1-3/4" Non-Metallic Low Voltage Raceway (Hellermann Tyton TSR3X-25-1)	12.90	4.12
26 05 33 23-0627	EA	Internal Elbow For 1-3/4" Non-Metallic Low Voltage Raceway (Hellermann Tyton TSR3X-33-1)	13.94	4.63
26 05 33 23-0628	EA	External Elbow For 1-3/4" Non-Metallic Low Voltage Raceway (Hellermann Tyton TSR3X-29-1)	17.52	4.63
26 05 33 23-0629	EA	End Cap For 1-3/4" Non-Metallic Low Voltage Raceway (Hellermann Tyton TSR3X-36)	10.44	3.09
26 05 33 23-0630	EA	Drop Ceiling Connector For 1-3/4" Non-Metallic Low Voltage Raceway (Hellermann Tyton TSR3X-50)	15.62	4.63
26 05 33 23-0631	EA	1-3/4" To 1-1/4" Reducer For Non-Metallic Low Voltage Raceway (Hellermann Tyton TSR1X-12)	14.56	5.15
26 05 33 23-0632		Non-Metallic Raceway Junction Boxes *(26 05 33 23-0612)*		
26 05 33 23-0633	EA	3" x 4-3/4" x 1-1/4", Single Gang, Non-Metallic Raceway Junction Box (Hellermann Tyton TSRX-JB1)	69.48	28.20
26 05 33 23-0634	EA	3" x 4-3/4" x 2", Single Gang, Non-Metallic Raceway Junction Box (Hellermann Tyton TSRX-JB2)	71.83	28.20
26 05 33 23-0635	EA	4.91" x 4.83" x 1.25", Double Gang, Non-Metallic Raceway Junction Box (Hellermann Tyton TSRX-JBD)	79.09	28.20
26 05 33 23-0636		Hubbell Two-Channel Non-Metallic Raceways *(26 05 33 23-0442)*		
		Note: Exposed on flat wall surface.		
26 05 33 23-0637		2.12" x 1.04", Two-Channel Non-Metallic Raceways *(26 05 33 23-0636)*		
26 05 33 23-0638	LF	2.12" x 1.04", Two-Channel Non-Metallic Raceway (Hubbell MT8BC7)	13.43	3.09
26 05 33 23-0639	LF	2.12" x 1.04", Two-Channel Non-Metallic Raceway With Adhesive (Hubbell MT8ABC7)	14.03	3.09
26 05 33 23-0640	EA	Splice Cover For 2.12" Two-Channel Non-Metallic Raceway (Hubbell MT8SC)	6.22	2.07
26 05 33 23-0641	EA	Tee Base And Cover For 2.12" Two-Channel Non-Metallic Raceway (Hubbell MT8TCBC)	26.25	6.19
26 05 33 23-0642	EA	Tee Cover Only For 2.12" Two-Channel Non-Metallic Raceway (Hubbell MT8TCC)	10.27	2.07
26 05 33 23-0643	EA	Flat 90 Degree Elbow Base And Cover For 2.12" Two-Channel Non-Metallic Raceway (Hubbell MT8FEBC)	19.35	4.12
26 05 33 23-0644	EA	Flat 90 Degree Elbow Cover Only For 2.12" Two-Channel Non-Metallic Raceway (Hubbell MT8FEC)	8.58	2.07
26 05 33 23-0645	EA	Internal Elbow Base And Cover For 2.12" Two-Channel Non-Metallic Raceway (Hubbell MT8IEBC)	21.18	4.63
26 05 33 23-0646	EA	Internal Elbow Cover Only For 2.12" Two-Channel Non-Metallic Raceway (Hubbell MT8IEC)	8.88	2.07
26 05 33 23-0647	EA	External Elbow Base And Cover For 2.12" Two-Channel Non-Metallic Raceway (Hubbell MT8EEBC)	21.78	4.63
26 05 33 23-0648	EA	External Elbow Cover Only For 2.12" Two-Channel Non-Metallic Raceway (Hubbell MT8EEC)	9.58	2.07
26 05 33 23-0649	EA	End Cap For 2.12" Two-Channel Non-Metallic Raceway (Hubbell MT8EC)	9.88	3.09
26 05 33 23-0650	EA	Conduit Adapter For 2.12" Two-Channel Non-Metallic Raceway (Hubbell MT8CACF)	21.98	4.63
26 05 33 23-0651	EA	Security Strap For 2.12" Two-Channel Non-Metallic Raceway (Hubbell MT8SS)	6.90	2.07
26 05 33 23-0652	EA	Light Fixture Box For 2.12" Two-Channel Non-Metallic Raceway (Hubbell MT678FB)	39.74	6.19
26 05 33 23-0653	EA	Single Gang Pass-Thru Divider Tunnel For 2.12" Two-Channel Non-Metallic Raceway (Hubbell MT678DT1G)	19.80	6.19
26 05 33 23-0654	EA	Double Gang Pass-Thru Divider Tunnel For 2.12" Two-Channel Non-Metallic Raceway (Hubbell MT678DT2G)	28.83	6.19
26 05 33 23-0655		Non-Metallic Raceway Junction Boxes *(26 05 33 23-0636)*		
26 05 33 23-0656	EA	3.25" x 4.90" x 1.25", Single Gang, Non-Metallic Raceway Junction Box (Hubbell MT678LB)	68.11	28.20
26 05 33 23-0657	EA	3.25" x 4.90" x 1.78", Single Gang, Non-Metallic Raceway Junction Box (Hubbell MT678SB)	69.10	28.20
26 05 33 23-0658	EA	3.25" x 4.90" x 2.44", Single Gang, Non-Metallic Raceway Junction Box (Hubbell MT678DB)	74.26	28.20
26 05 33 23-0659	EA	5.06" x 4.90" x 2.44", Double Gang, Non-Metallic Raceway Junction Box (Hubbell MT678CTGB)	75.05	28.20
26 05 33 23-0660	EA	Divided, 5.06" x 4.90" x 2.44", Double Gang, Non-Metallic Raceway Junction Box (Hubbell MT678TGD)	85.76	28.20
26 05 33 23-0661		Surface Cable Protection System *(26 05 33 23)*		
26 05 33 23-0662	EA	35-1/2" Long x 18-9/16" Wide x 3" High, Three Channel, Heavy-Duty Polyurethene, Surface Cable Protector (Yellow Jacket® CP-YJHD-3)	658.68	
		Note: Modular interlocking design with hinged lid.		
26 05 33 23-0663	EA	35-3/4" Long x 19-3/4" Wide x 1-7/8" High, Five Channel, Heavy-Duty Polyurethene, Surface Cable Protector (Yellow Jacket® CP-YJHD-5)	495.97	
		Note: Modular interlocking design with hinged lid.		

26 05 36 Cable Trays for Electrical Systems *(26 05)*

26 05 36 00-0001 Cable Trays *(26 05 36)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
		Note: Excludes supporting hangers.		
26 05 36 00-0002		Ladder Bottom Galvanized Steel Cable Tray *(26 05 36 00-0001)*		
26 05 36 00-0003		4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray *(26 05 36 00-0002)*		
26 05 36 00-0004		4" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray *(26 05 36 00-0003)*		
26 05 36 00-0005	LF	6" Wide, 4" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	42.69	10.83
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-3.36*	
26 05 36 00-0006	LF	9" Wide, 4" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	46.17	11.62
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-3.65*	
26 05 36 00-0007	LF	12" Wide, 4" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	50.52	12.52
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-4.01*	
26 05 36 00-0008	LF	18" Wide, 4" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	56.52	13.31
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-4.55*	
26 05 36 00-0009	LF	24" Wide, 4" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	62.39	13.76
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-5.10*	
26 05 36 00-0010	LF	30" Wide, 4" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	76.36	15.91
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-6.32*	
26 05 36 00-0011	LF	36" Wide, 4" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	85.55	18.16
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-7.05*	
26 05 36 00-0012		6" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray *(26 05 36 00-0003)*		
26 05 36 00-0013	LF	6" Wide, 6" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	40.08	10.61
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-3.12*	
26 05 36 00-0014	LF	9" Wide, 6" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	43.46	11.28
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-3.40*	
26 05 36 00-0015	LF	12" Wide, 6" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	46.29	12.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-3.60*	
26 05 36 00-0016	LF	18" Wide, 6" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	50.98	12.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-4.02*	
26 05 36 00-0017	LF	24" Wide, 6" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	55.19	13.42
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-4.40*	
26 05 36 00-0018	LF	30" Wide, 6" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	64.97	15.46
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-5.21*	
26 05 36 00-0019	LF	36" Wide, 6" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	70.96	16.92
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-5.68*	
26 05 36 00-0020		9" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray *(26 05 36 00-0003)*		
26 05 36 00-0021	LF	6" Wide, 9" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	38.55	10.49
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-2.98*	
26 05 36 00-0022	LF	9" Wide, 9" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	39.67	10.83
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-3.06*	
26 05 36 00-0023	LF	12" Wide, 9" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	43.89	11.51
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-3.43*	
26 05 36 00-0024	LF	18" Wide, 9" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	48.26	12.07
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-3.82*	
26 05 36 00-0025	LF	24" Wide, 9" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	52.57	12.41
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-4.22*	
26 05 36 00-0026	LF	30" Wide, 9" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	57.34	13.53
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-4.61*	
26 05 36 00-0027	LF	36" Wide, 9" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	61.54	14.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-4.93*	
26 05 36 00-0028		12" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray *(26 05 36 00-0003)*		
26 05 36 00-0029	LF	6" Wide, 12" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	37.43	10.04
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-2.91*	
26 05 36 00-0030	LF	9" Wide, 12" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	38.22	10.26
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-2.97*	
26 05 36 00-0031	LF	12" Wide, 12" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	40.49	10.83
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-3.15*	
26 05 36 00-0032	LF	18" Wide, 12" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	42.92	11.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-3.35*	
26 05 36 00-0033	LF	24" Wide, 12" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	44.90	11.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-3.54*	
26 05 36 00-0034	LF	30" Wide, 12" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	49.73	12.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-3.95*	
26 05 36 00-0035	LF	36" Wide, 12" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	52.40	12.86
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-4.17*	
26 05 36 00-0036		18" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray *(26 05 36 00-0003)*		
26 05 36 00-0037	LF	6" Wide, 18" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	36.94	9.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-2.87*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0038	LF	9" Wide, 18" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	37.58	10.04
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-2.92*	
26 05 36 00-0039	LF	12" Wide, 18" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	39.85	10.61
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-3.10*	
26 05 36 00-0040	LF	18" Wide, 18" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	41.87	11.06
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-3.26*	
26 05 36 00-0041	LF	24" Wide, 18" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	42.60	11.17
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-3.33*	
26 05 36 00-0042	LF	30" Wide, 18" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	45.21	11.96
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-3.52*	
26 05 36 00-0043	LF	36" Wide, 18" Rung Spacing, 4-5/8" High, Straight Sections, Ladder Bottom Galvanized Steel Cable Tray	47.13	12.63
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-3.66*	

26 05 36 00-0044 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fittings *(26 05 36 00-0002)*

26 05 36 00-0045 12" Radius, Horizontal 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0044)*

26 05 36 00-0046	EA	6" Wide, 12" Radius, Horizontal 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	321.60	113.14
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-22.73*	
26 05 36 00-0047	EA	9" Wide, 12" Radius, Horizontal 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	358.44	128.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-25.11*	
26 05 36 00-0048	EA	12" Wide, 12" Radius, Horizontal 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	393.70	142.47
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-27.50*	
26 05 36 00-0049	EA	18" Wide, 12" Radius, Horizontal 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	493.83	174.62
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-34.83*	
26 05 36 00-0050	EA	24" Wide, 12" Radius, Horizontal 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	562.28	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.52*	
26 05 36 00-0051	EA	30" Wide, 12" Radius, Horizontal 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	675.99	225.60
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-48.80*	
26 05 36 00-0052	EA	36" Wide, 12" Radius, Horizontal 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	780.44	257.86
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-56.56*	

26 05 36 00-0053 24" Radius, Horizontal 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0044)*

26 05 36 00-0054	EA	6" Wide, 24" Radius, Horizontal 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	470.75	117.65
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-37.27*	
26 05 36 00-0055	EA	9" Wide, 24" Radius, Horizontal 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	508.51	135.25
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.58*	
26 05 36 00-0056	EA	12" Wide, 24" Radius, Horizontal 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	544.32	150.37
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-41.90*	
26 05 36 00-0057	EA	18" Wide, 24" Radius, Horizontal 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	628.15	186.79
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-47.25*	
26 05 36 00-0058	EA	24" Wide, 24" Radius, Horizontal 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	701.21	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-52.07*	
26 05 36 00-0059	EA	30" Wide, 24" Radius, Horizontal 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	779.60	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-57.47*	
26 05 36 00-0060	EA	36" Wide, 24" Radius, Horizontal 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	914.17	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-67.68*	

26 05 36 00-0061 36" Radius, Horizontal 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0044)*

26 05 36 00-0062	EA	6" Wide, 36" Radius, Horizontal 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	509.17	122.95
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-40.67*	
26 05 36 00-0063	EA	9" Wide, 36" Radius, Horizontal 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	558.29	142.36
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-43.97*	
26 05 36 00-0064	EA	12" Wide, 36" Radius, Horizontal 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	601.44	159.28
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-46.87*	
26 05 36 00-0065	EA	18" Wide, 36" Radius, Horizontal 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	718.61	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-55.16*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0066	EA	24" Wide, 36" Radius, Horizontal 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	814.73	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-61.86*	
26 05 36 00-0067	EA	30" Wide, 36" Radius, Horizontal 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	958.23	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-73.26*	
26 05 36 00-0068	EA	36" Wide, 36" Radius, Horizontal 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,083.58	318.10
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-81.85*	
26 05 36 00-0069		**12" Radius, Horizontal 45 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting** *(26 05 36 00-0044)*		
26 05 36 00-0070	EA	6" Wide, 12" Radius, Horizontal 45 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	240.14	82.01
		For 60 Degree Bend, Deduct	*-47.82*	
		For 30 Degree Bend, Deduct	*-84.26*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-17.18*	
26 05 36 00-0071	EA	9" Wide, 12" Radius, Horizontal 45 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	271.60	98.36
		For 60 Degree Bend, Deduct	*-51.94*	
		For 30 Degree Bend, Deduct	*-92.03*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-18.97*	
26 05 36 00-0072	EA	12" Wide, 12" Radius, Horizontal 45 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	299.97	112.80
		For 60 Degree Bend, Deduct	*-55.75*	
		For 30 Degree Bend, Deduct	*-99.18*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-20.60*	
26 05 36 00-0073	EA	18" Wide, 12" Radius, Horizontal 45 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	355.89	142.58
		For 60 Degree Bend, Deduct	*-62.80*	
		For 30 Degree Bend, Deduct	*-112.59*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-23.71*	
26 05 36 00-0074	EA	24" Wide, 12" Radius, Horizontal 45 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	443.13	174.62
		For 60 Degree Bend, Deduct	*-79.30*	
		For 30 Degree Bend, Deduct	*-141.86*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-29.76*	
26 05 36 00-0075	EA	30" Wide, 12" Radius, Horizontal 45 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	528.48	200.45
		For 60 Degree Bend, Deduct	*-97.55*	
		For 30 Degree Bend, Deduct	*-173.72*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-36.14*	
26 05 36 00-0076	EA	36" Wide, 12" Radius, Horizontal 45 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	595.02	235.30
		For 60 Degree Bend, Deduct	*-106.15*	
		For 30 Degree Bend, Deduct	*-189.99*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.89*	
26 05 36 00-0077		**24" Radius, Horizontal 45 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting** *(26 05 36 00-0044)*		
26 05 36 00-0078	EA	6" Wide, 24" Radius, Horizontal 45 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	271.92	84.60
		For 60 Degree Bend, Deduct	*-57.32*	
		For 30 Degree Bend, Deduct	*-100.23*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-20.15*	
26 05 36 00-0079	EA	9" Wide, 24" Radius, Horizontal 45 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	309.41	101.97
		For 60 Degree Bend, Deduct	*-63.01*	
		For 30 Degree Bend, Deduct	*-110.68*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-22.44*	
26 05 36 00-0080	EA	12" Wide, 24" Radius, Horizontal 45 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	352.58	117.76
		For 60 Degree Bend, Deduct	*-71.21*	
		For 30 Degree Bend, Deduct	*-125.23*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-25.45*	
26 05 36 00-0081	EA	18" Wide, 24" Radius, Horizontal 45 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	411.23	150.37
		For 60 Degree Bend, Deduct	*-78.05*	
		For 30 Degree Bend, Deduct	*-138.44*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-28.59*	
26 05 36 00-0082	EA	24" Wide, 24" Radius, Horizontal 45 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	505.62	186.79
		For 60 Degree Bend, Deduct	*-95.26*	
		For 30 Degree Bend, Deduct	*-169.15*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-35.00*	
26 05 36 00-0083	EA	30" Wide, 24" Radius, Horizontal 45 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	593.47	216.69
		For 60 Degree Bend, Deduct	*-112.80*	
		For 30 Degree Bend, Deduct	*-200.03*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-41.29*	

copyright 2026 The Gordian Group, Inc.

	CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0084		EA	36" Wide, 24" Radius, Horizontal 45 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	696.07	257.97
			For 60 Degree Bend, Deduct	*-130.83*	
			For 30 Degree Bend, Deduct	*-232.38*	
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-48.11*	

26 05 36 00-0085 36" Radius, Horizontal 45 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0044)*

26 05 36 00-0086		EA	6" Wide, 36" Radius, Horizontal 45 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	333.46	87.31
			For 60 Degree Bend, Deduct	*-76.59*	
			For 30 Degree Bend, Deduct	*-132.50*	
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-26.07*	
26 05 36 00-0087		EA	9" Wide, 36" Radius, Horizontal 45 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	375.28	106.03
			For 60 Degree Bend, Deduct	*-83.20*	
			For 30 Degree Bend, Deduct	*-144.56*	
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-28.69*	
26 05 36 00-0088		EA	12" Wide, 36" Radius, Horizontal 45 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	407.90	123.06
			For 60 Degree Bend, Deduct	*-87.44*	
			For 30 Degree Bend, Deduct	*-152.56*	
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-30.54*	
26 05 36 00-0089		EA	18" Wide, 36" Radius, Horizontal 45 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	485.25	159.28
			For 60 Degree Bend, Deduct	*-99.06*	
			For 30 Degree Bend, Deduct	*-173.95*	
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-35.25*	
26 05 36 00-0090		EA	24" Wide, 36" Radius, Horizontal 45 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	566.51	200.45
			For 60 Degree Bend, Deduct	*-110.10*	
			For 30 Degree Bend, Deduct	*-194.64*	
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.95*	
26 05 36 00-0091		EA	30" Wide, 36" Radius, Horizontal 45 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	692.20	235.30
			For 60 Degree Bend, Deduct	*-138.22*	
			For 30 Degree Bend, Deduct	*-243.44*	
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-49.61*	
26 05 36 00-0092		EA	36" Wide, 36" Radius, Horizontal 45 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	808.54	284.82
			For 60 Degree Bend, Deduct	*-157.63*	
			For 30 Degree Bend, Deduct	*-278.53*	
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-57.12*	

26 05 36 00-0093 12" Radius, Vertical 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0044)*

26 05 36 00-0094		EA	6" Wide, 12" Radius, Vertical 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	352.10	112.80
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-25.81*	
26 05 36 00-0095		EA	9" Wide, 12" Radius, Vertical 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	382.66	128.82
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-27.53*	
26 05 36 00-0096		EA	12" Wide, 12" Radius, Vertical 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	410.91	142.47
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-29.22*	
26 05 36 00-0097		EA	18" Wide, 12" Radius, Vertical 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	472.10	174.62
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-32.66*	
26 05 36 00-0098		EA	24" Wide, 12" Radius, Vertical 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	522.75	200.45
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-35.57*	
26 05 36 00-0099		EA	30" Wide, 12" Radius, Vertical 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	579.72	225.60
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.17*	
26 05 36 00-0100		EA	36" Wide, 12" Radius, Vertical 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	640.48	257.52
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-42.59*	

26 05 36 00-0101 24" Radius, Vertical 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0044)*

26 05 36 00-0102		EA	6" Wide, 24" Radius, Vertical 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	428.12	117.65
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-33.01*	
26 05 36 00-0103		EA	9" Wide, 24" Radius, Vertical 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	463.27	135.36
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-35.05*	
26 05 36 00-0104		EA	12" Wide, 24" Radius, Vertical 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	497.77	150.37
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-37.24*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0105	EA	18" Wide, 24" Radius, Vertical 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	571.56	186.79
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-41.59*	
26 05 36 00-0106	EA	24" Wide, 24" Radius, Vertical 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	634.59	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-45.41*	
26 05 36 00-0107	EA	30" Wide, 24" Radius, Vertical 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	698.49	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-49.35*	
26 05 36 00-0108	EA	36" Wide, 24" Radius, Vertical 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	799.19	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-56.18*	
26 05 36 00-0109		**36" Radius, Vertical 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting** *(26 05 36 00-0044)*		
26 05 36 00-0110	EA	6" Wide, 36" Radius, Vertical 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	518.07	122.95
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-41.56*	
26 05 36 00-0111	EA	9" Wide, 36" Radius, Vertical 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	561.81	142.47
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-44.31*	
26 05 36 00-0112	EA	12" Wide, 36" Radius, Vertical 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	593.75	159.28
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-46.10*	
26 05 36 00-0113	EA	18" Wide, 36" Radius, Vertical 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	688.74	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-52.17*	
26 05 36 00-0114	EA	24" Wide, 36" Radius, Vertical 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	750.60	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-55.45*	
26 05 36 00-0115	EA	30" Wide, 36" Radius, Vertical 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	858.63	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-63.30*	
26 05 36 00-0116	EA	36" Wide, 36" Radius, Vertical 90 Degree Elbows, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	963.92	318.10
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-69.89*	
26 05 36 00-0117		**12" Radius, Horizontal Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting** *(26 05 36 00-0044)*		
26 05 36 00-0118	EA	6" Wide, 12" Radius, Horizontal Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	623.95	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-44.34*	
26 05 36 00-0119	EA	9" Wide, 12" Radius, Horizontal Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	674.70	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-47.86*	
26 05 36 00-0120	EA	12" Wide, 12" Radius, Horizontal Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	708.07	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-50.31*	
26 05 36 00-0121	EA	18" Wide, 12" Radius, Horizontal Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	792.54	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-56.69*	
26 05 36 00-0122	EA	24" Wide, 12" Radius, Horizontal Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	901.08	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-65.06*	
26 05 36 00-0123	EA	30" Wide, 12" Radius, Horizontal Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,009.73	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-74.42*	
26 05 36 00-0124	EA	36" Wide, 12" Radius, Horizontal Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,142.71	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-84.21*	
26 05 36 00-0125		**24" Radius, Horizontal Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting** *(26 05 36 00-0044)*		
26 05 36 00-0126	EA	6" Wide, 24" Radius, Horizontal Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	804.17	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-60.81*	
26 05 36 00-0127	EA	9" Wide, 24" Radius, Horizontal Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	861.46	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-64.65*	
26 05 36 00-0128	EA	12" Wide, 24" Radius, Horizontal Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	898.47	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-67.29*	
26 05 36 00-0129	EA	18" Wide, 24" Radius, Horizontal Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	983.47	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-73.30*	
26 05 36 00-0130	EA	24" Wide, 24" Radius, Horizontal Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,089.74	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-80.77*	
26 05 36 00-0131	EA	30" Wide, 24" Radius, Horizontal Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,174.10	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-87.35*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0132	EA	36" Wide, 24" Radius, Horizontal Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,428.26	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-108.10*	

26 05 36 00-0133 36" Radius, Horizontal Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0044)*

26 05 36 00-0134	EA	6" Wide, 36" Radius, Horizontal Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,045.86	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-83.09*	
26 05 36 00-0135	EA	9" Wide, 36" Radius, Horizontal Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,114.27	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-87.69*	
26 05 36 00-0136	EA	12" Wide, 36" Radius, Horizontal Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,183.56	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-93.31*	
26 05 36 00-0137	EA	18" Wide, 36" Radius, Horizontal Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,297.68	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-101.57*	
26 05 36 00-0138	EA	24" Wide, 36" Radius, Horizontal Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,471.68	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-114.98*	
26 05 36 00-0139	EA	30" Wide, 36" Radius, Horizontal Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,596.96	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-124.97*	
26 05 36 00-0140	EA	36" Wide, 36" Radius, Horizontal Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,788.85	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-137.90*	

26 05 36 00-0141 12" Radius, Vertical Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0044)*

26 05 36 00-0142	EA	6" Wide, 12" Radius, Vertical Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	781.39	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-61.43*	
26 05 36 00-0143	EA	9" Wide, 12" Radius, Vertical Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	798.49	208.35
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-62.48*	
26 05 36 00-0144	EA	12" Wide, 12" Radius, Vertical Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	816.20	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-63.57*	
26 05 36 00-0145	EA	18" Wide, 12" Radius, Vertical Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	855.17	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-65.91*	
26 05 36 00-0146	EA	24" Wide, 12" Radius, Vertical Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	880.70	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-67.58*	
26 05 36 00-0147	EA	30" Wide, 12" Radius, Vertical Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	953.40	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-72.78*	
26 05 36 00-0148	EA	36" Wide, 12" Radius, Vertical Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,022.70	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-77.23*	

26 05 36 00-0149 24" Radius, Vertical Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0044)*

26 05 36 00-0150	EA	6" Wide, 24" Radius, Vertical Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,169.30	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-98.88*	
26 05 36 00-0151	EA	9" Wide, 24" Radius, Vertical Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,195.99	225.60
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-100.80*	
26 05 36 00-0152	EA	12" Wide, 24" Radius, Vertical Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,223.97	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-102.79*	
26 05 36 00-0153	EA	18" Wide, 24" Radius, Vertical Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,285.18	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-107.02*	
26 05 36 00-0154	EA	24" Wide, 24" Radius, Vertical Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,330.04	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-110.44*	
26 05 36 00-0155	EA	30" Wide, 24" Radius, Vertical Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,403.27	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-115.28*	
26 05 36 00-0156	EA	36" Wide, 24" Radius, Vertical Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,505.62	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-122.36*	

26 05 36 00-0157 36" Radius, Vertical Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0044)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0158	EA	6" Wide, 36" Radius, Vertical Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,902.72	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-170.66*	
26 05 36 00-0159	EA	9" Wide, 36" Radius, Vertical Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,940.02	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-173.51*	
26 05 36 00-0160	EA	12" Wide, 36" Radius, Vertical Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,979.63	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-176.47*	
26 05 36 00-0161	EA	18" Wide, 36" Radius, Vertical Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	2,044.12	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-180.67*	
26 05 36 00-0162	EA	24" Wide, 36" Radius, Vertical Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	2,089.87	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-183.94*	
26 05 36 00-0163	EA	30" Wide, 36" Radius, Vertical Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	2,211.83	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-192.98*	
26 05 36 00-0164	EA	36" Wide, 36" Radius, Vertical Tees, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	2,311.29	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-198.94*	

26 05 36 00-0165 12" Radius, Horizontal Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0044)*

26 05 36 00-0166	EA	6" Wide, 12" Radius, Horizontal Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	776.84	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-55.12*	
26 05 36 00-0167	EA	9" Wide, 12" Radius, Horizontal Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	816.09	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-57.87*	
26 05 36 00-0168	EA	12" Wide, 12" Radius, Horizontal Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	873.61	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-62.32*	
26 05 36 00-0169	EA	18" Wide, 12" Radius, Horizontal Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	939.11	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-67.36*	
26 05 36 00-0170	EA	24" Wide, 12" Radius, Horizontal Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,056.40	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-75.58*	
26 05 36 00-0171	EA	30" Wide, 12" Radius, Horizontal Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,189.19	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-86.73*	
26 05 36 00-0172	EA	36" Wide, 12" Radius, Horizontal Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,302.71	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-95.54*	

26 05 36 00-0173 24" Radius, Horizontal Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0044)*

26 05 36 00-0174	EA	6" Wide, 24" Radius, Horizontal Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,132.56	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-88.21*	
26 05 36 00-0175	EA	9" Wide, 24" Radius, Horizontal Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,182.36	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-91.68*	
26 05 36 00-0176	EA	12" Wide, 24" Radius, Horizontal Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,234.90	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-95.29*	
26 05 36 00-0177	EA	18" Wide, 24" Radius, Horizontal Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,315.34	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-101.47*	
26 05 36 00-0178	EA	24" Wide, 24" Radius, Horizontal Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,455.72	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-110.84*	
26 05 36 00-0179	EA	30" Wide, 24" Radius, Horizontal Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,564.15	451.20
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-118.82*	
26 05 36 00-0180	EA	36" Wide, 24" Radius, Horizontal Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,761.39	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-135.15*	

26 05 36 00-0181 36" Radius, Horizontal Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0044)*

26 05 36 00-0182	EA	6" Wide, 36" Radius, Horizontal Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,446.77	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-116.48*	
26 05 36 00-0183	EA	9" Wide, 36" Radius, Horizontal Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,523.28	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-122.26*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0184	EA	12" Wide, 36" Radius, Horizontal Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,605.08	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-128.32*	
26 05 36 00-0185	EA	18" Wide, 36" Radius, Horizontal Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,753.90	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-140.66*	
26 05 36 00-0186	EA	24" Wide, 36" Radius, Horizontal Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,996.79	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-158.69*	
26 05 36 00-0187	EA	30" Wide, 36" Radius, Horizontal Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	2,176.07	540.54
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-172.56*	
26 05 36 00-0188	EA	36" Wide, 36" Radius, Horizontal Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	2,376.76	602.13
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-187.50*	

26 05 36 00-0189 12" Radius, Vertical Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0044)*

26 05 36 00-0190	EA	6" Wide, 12" Radius, Vertical Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	923.38	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-69.78*	
26 05 36 00-0191	EA	9" Wide, 12" Radius, Vertical Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	969.85	284.94
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-73.24*	
26 05 36 00-0192	EA	12" Wide, 12" Radius, Vertical Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,041.25	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-79.09*	
26 05 36 00-0193	EA	18" Wide, 12" Radius, Vertical Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,122.92	318.78
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-85.73*	
26 05 36 00-0194	EA	24" Wide, 12" Radius, Vertical Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,261.20	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-96.06*	
26 05 36 00-0195	EA	30" Wide, 12" Radius, Vertical Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,434.89	386.46
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-111.28*	
26 05 36 00-0196	EA	36" Wide, 12" Radius, Vertical Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,575.52	416.23
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-122.87*	

26 05 36 00-0197 24" Radius, Vertical Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0044)*

26 05 36 00-0198	EA	6" Wide, 24" Radius, Vertical Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,416.81	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-116.64*	
26 05 36 00-0199	EA	9" Wide, 24" Radius, Vertical Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,475.44	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-120.99*	
26 05 36 00-0200	EA	12" Wide, 24" Radius, Vertical Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,536.81	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-125.48*	
26 05 36 00-0201	EA	18" Wide, 24" Radius, Vertical Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,636.67	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-133.60*	
26 05 36 00-0202	EA	24" Wide, 24" Radius, Vertical Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,798.24	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-145.10*	
26 05 36 00-0203	EA	30" Wide, 24" Radius, Vertical Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,929.61	451.20
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-155.36*	
26 05 36 00-0204	EA	36" Wide, 24" Radius, Vertical Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	2,185.12	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-177.52*	

26 05 36 00-0205 36" Radius, Vertical Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0044)*

26 05 36 00-0206	EA	6" Wide, 36" Radius, Vertical Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,844.01	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-156.20*	
26 05 36 00-0207	EA	9" Wide, 36" Radius, Vertical Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,938.18	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-163.75*	
26 05 36 00-0208	EA	12" Wide, 36" Radius, Vertical Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	2,037.63	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-171.57*	
26 05 36 00-0209	EA	18" Wide, 36" Radius, Vertical Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	2,230.60	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-188.33*	
26 05 36 00-0210	EA	24" Wide, 36" Radius, Vertical Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	2,526.45	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-211.66*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0211	EA	30" Wide, 36" Radius, Vertical Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	2,749.87	540.54
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-229.94*	
26 05 36 00-0212	EA	36" Wide, 36" Radius, Vertical Crosses, 4" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	2,994.70	602.13
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-249.29*	

26 05 36 00-0213 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fittings *(26 05 36 00-0002)*

26 05 36 00-0214 12" Radius, Horizontal 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0213)*

26 05 36 00-0215	EA	6" Wide, 12" Radius, Horizontal 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	302.59	113.14
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-20.83*	
26 05 36 00-0216	EA	9" Wide, 12" Radius, Horizontal 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	337.91	128.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-23.05*	
26 05 36 00-0217	EA	12" Wide, 12" Radius, Horizontal 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	371.37	142.47
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-25.27*	
26 05 36 00-0218	EA	18" Wide, 12" Radius, Horizontal 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	464.86	174.62
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-31.94*	
26 05 36 00-0219	EA	24" Wide, 12" Radius, Horizontal 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	529.69	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-36.26*	
26 05 36 00-0220	EA	30" Wide, 12" Radius, Horizontal 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	633.13	225.60
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-44.51*	
26 05 36 00-0221	EA	36" Wide, 12" Radius, Horizontal 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	730.34	257.86
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-51.55*	

26 05 36 00-0222 24" Radius, Horizontal 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0213)*

26 05 36 00-0223	EA	6" Wide, 24" Radius, Horizontal 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	431.51	117.65
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-33.35*	
26 05 36 00-0224	EA	9" Wide, 24" Radius, Horizontal 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	468.07	135.25
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-35.54*	
26 05 36 00-0225	EA	12" Wide, 24" Radius, Horizontal 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	502.37	150.37
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-37.70*	
26 05 36 00-0226	EA	18" Wide, 24" Radius, Horizontal 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	582.88	186.79
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-42.73*	
26 05 36 00-0227	EA	24" Wide, 24" Radius, Horizontal 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	652.62	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-47.21*	
26 05 36 00-0228	EA	30" Wide, 24" Radius, Horizontal 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	726.78	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-52.18*	
26 05 36 00-0229	EA	36" Wide, 24" Radius, Horizontal 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	851.40	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-61.40*	

26 05 36 00-0230 36" Radius, Horizontal 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0213)*

26 05 36 00-0231	EA	6" Wide, 36" Radius, Horizontal 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	465.71	122.95
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-36.32*	
26 05 36 00-0232	EA	9" Wide, 36" Radius, Horizontal 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	512.41	142.36
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.38*	
26 05 36 00-0233	EA	12" Wide, 36" Radius, Horizontal 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	553.46	159.28
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-42.07*	
26 05 36 00-0234	EA	18" Wide, 36" Radius, Horizontal 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	663.69	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-49.66*	
26 05 36 00-0235	EA	24" Wide, 36" Radius, Horizontal 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	754.37	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-55.83*	
26 05 36 00-0236	EA	30" Wide, 36" Radius, Horizontal 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	885.79	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-66.02*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0237	EA	36" Wide, 36" Radius, Horizontal 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,004.51	318.10
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-73.95*	

26 05 36 00-0238 12" Radius, Horizontal 45 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0213)*

26 05 36 00-0239	EA	6" Wide, 12" Radius, Horizontal 45 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	225.35	82.01
		For 60 Degree Bend, Deduct	*-42.94*	
		For 30 Degree Bend, Deduct	*-76.13*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-15.70*	
26 05 36 00-0240	EA	9" Wide, 12" Radius, Horizontal 45 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	256.21	98.36
		For 60 Degree Bend, Deduct	*-46.86*	
		For 30 Degree Bend, Deduct	*-83.56*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-17.43*	
26 05 36 00-0241	EA	12" Wide, 12" Radius, Horizontal 45 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	283.97	112.80
		For 60 Degree Bend, Deduct	*-50.47*	
		For 30 Degree Bend, Deduct	*-90.38*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-19.00*	
26 05 36 00-0242	EA	18" Wide, 12" Radius, Horizontal 45 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	338.99	142.58
		For 60 Degree Bend, Deduct	*-57.22*	
		For 30 Degree Bend, Deduct	*-103.29*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-22.02*	
26 05 36 00-0243	EA	24" Wide, 12" Radius, Horizontal 45 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	421.40	174.62
		For 60 Degree Bend, Deduct	*-72.13*	
		For 30 Degree Bend, Deduct	*-129.91*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-27.59*	
26 05 36 00-0244	EA	30" Wide, 12" Radius, Horizontal 45 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	500.71	200.45
		For 60 Degree Bend, Deduct	*-88.39*	
		For 30 Degree Bend, Deduct	*-158.45*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-33.37*	
26 05 36 00-0245	EA	36" Wide, 12" Radius, Horizontal 45 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	566.05	235.30
		For 60 Degree Bend, Deduct	*-96.59*	
		For 30 Degree Bend, Deduct	*-174.05*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-36.99*	

26 05 36 00-0246 24" Radius, Horizontal 45 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0213)*

26 05 36 00-0247	EA	6" Wide, 24" Radius, Horizontal 45 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	253.21	84.60
		For 60 Degree Bend, Deduct	*-51.14*	
		For 30 Degree Bend, Deduct	*-89.94*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-18.27*	
26 05 36 00-0248	EA	9" Wide, 24" Radius, Horizontal 45 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	289.49	101.97
		For 60 Degree Bend, Deduct	*-56.44*	
		For 30 Degree Bend, Deduct	*-99.73*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-20.45*	
26 05 36 00-0249	EA	12" Wide, 24" Radius, Horizontal 45 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	330.25	117.76
		For 60 Degree Bend, Deduct	*-63.85*	
		For 30 Degree Bend, Deduct	*-112.95*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-23.21*	
26 05 36 00-0250	EA	18" Wide, 24" Radius, Horizontal 45 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	388.29	150.37
		For 60 Degree Bend, Deduct	*-70.48*	
		For 30 Degree Bend, Deduct	*-125.83*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-26.30*	
26 05 36 00-0251	EA	24" Wide, 24" Radius, Horizontal 45 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	477.85	186.79
		For 60 Degree Bend, Deduct	*-86.10*	
		For 30 Degree Bend, Deduct	*-153.88*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-32.22*	
26 05 36 00-0252	EA	30" Wide, 24" Radius, Horizontal 45 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	560.27	216.69
		For 60 Degree Bend, Deduct	*-101.84*	
		For 30 Degree Bend, Deduct	*-181.77*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-37.97*	
26 05 36 00-0253	EA	36" Wide, 24" Radius, Horizontal 45 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	658.04	257.97
		For 60 Degree Bend, Deduct	*-118.28*	
		For 30 Degree Bend, Deduct	*-211.46*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-44.31*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0254		**36" Radius, Horizontal 45 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting** *(26 05 36 00-0213)*		
26 05 36 00-0255	EA	6" Wide, 36" Radius, Horizontal 45 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	306.60	87.31
		For 60 Degree Bend, Deduct	*-67.73*	
		For 30 Degree Bend, Deduct	*-117.73*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-23.39*	
26 05 36 00-0256	EA	9" Wide, 36" Radius, Horizontal 45 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	346.91	106.03
		For 60 Degree Bend, Deduct	*-73.84*	
		For 30 Degree Bend, Deduct	*-128.96*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-25.86*	
26 05 36 00-0257	EA	12" Wide, 36" Radius, Horizontal 45 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	378.93	123.06
		For 60 Degree Bend, Deduct	*-77.88*	
		For 30 Degree Bend, Deduct	*-136.63*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-27.64*	
26 05 36 00-0258	EA	18" Wide, 36" Radius, Horizontal 45 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	453.86	159.28
		For 60 Degree Bend, Deduct	*-88.70*	
		For 30 Degree Bend, Deduct	*-156.68*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-32.11*	
26 05 36 00-0259	EA	24" Wide, 36" Radius, Horizontal 45 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	533.31	200.45
		For 60 Degree Bend, Deduct	*-99.14*	
		For 30 Degree Bend, Deduct	*-176.38*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-36.63*	
26 05 36 00-0260	EA	30" Wide, 36" Radius, Horizontal 45 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	649.34	235.30
		For 60 Degree Bend, Deduct	*-124.07*	
		For 30 Degree Bend, Deduct	*-219.86*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-45.32*	
26 05 36 00-0261	EA	36" Wide, 36" Radius, Horizontal 45 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	760.86	284.82
		For 60 Degree Bend, Deduct	*-141.89*	
		For 30 Degree Bend, Deduct	*-252.31*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-52.35*	
26 05 36 00-0262		**12" Radius, Vertical 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting** *(26 05 36 00-0213)*		
26 05 36 00-0263	EA	6" Wide, 12" Radius, Vertical 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	338.98	112.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-24.50*	
26 05 36 00-0264	EA	9" Wide, 12" Radius, Vertical 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	369.23	128.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-26.18*	
26 05 36 00-0265	EA	12" Wide, 12" Radius, Vertical 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	397.02	142.47
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-27.83*	
26 05 36 00-0266	EA	18" Wide, 12" Radius, Vertical 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	457.61	174.62
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-31.21*	
26 05 36 00-0267	EA	24" Wide, 12" Radius, Vertical 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	507.66	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-34.06*	
26 05 36 00-0268	EA	30" Wide, 12" Radius, Vertical 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	563.42	225.60
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-37.54*	
26 05 36 00-0269	EA	36" Wide, 12" Radius, Vertical 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	623.58	257.52
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-40.90*	
26 05 36 00-0270		**24" Radius, Vertical 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting** *(26 05 36 00-0213)*		
26 05 36 00-0271	EA	6" Wide, 24" Radius, Vertical 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	409.56	117.65
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-31.15*	
26 05 36 00-0272	EA	9" Wide, 24" Radius, Vertical 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	444.25	135.36
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-33.15*	
26 05 36 00-0273	EA	12" Wide, 24" Radius, Vertical 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	478.00	150.37
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-35.27*	
26 05 36 00-0274	EA	18" Wide, 24" Radius, Vertical 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	550.74	186.79
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.51*	
26 05 36 00-0275	EA	24" Wide, 24" Radius, Vertical 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	612.71	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-43.22*	
26 05 36 00-0276	EA	30" Wide, 24" Radius, Vertical 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	675.40	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-47.05*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0277	EA	36" Wide, 24" Radius, Vertical 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	773.23	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-53.59*	

26 05 36 00-0278 36" Radius, Vertical 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0213)*

26 05 36 00-0279	EA	6" Wide, 36" Radius, Vertical 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	493.02	122.95
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.05*	
26 05 36 00-0280	EA	9" Wide, 36" Radius, Vertical 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	535.85	142.47
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-41.72*	
26 05 36 00-0281	EA	12" Wide, 36" Radius, Vertical 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	567.49	159.28
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-43.47*	
26 05 36 00-0282	EA	18" Wide, 36" Radius, Vertical 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	660.37	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-49.33*	
26 05 36 00-0283	EA	24" Wide, 36" Radius, Vertical 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	721.93	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-52.58*	
26 05 36 00-0284	EA	30" Wide, 36" Radius, Vertical 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	826.04	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-60.04*	
26 05 36 00-0285	EA	36" Wide, 36" Radius, Vertical 90 Degree Elbows, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	929.21	318.10
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-66.42*	

26 05 36 00-0286 12" Radius, Horizontal Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0213)*

26 05 36 00-0287	EA	6" Wide, 12" Radius, Horizontal Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	603.73	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-42.32*	
26 05 36 00-0288	EA	9" Wide, 12" Radius, Horizontal Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	652.97	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-45.69*	
26 05 36 00-0289	EA	12" Wide, 12" Radius, Horizontal Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	685.13	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-48.02*	
26 05 36 00-0290	EA	18" Wide, 12" Radius, Horizontal Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	766.28	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-54.07*	
26 05 36 00-0291	EA	24" Wide, 12" Radius, Horizontal Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	870.29	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-61.98*	
26 05 36 00-0292	EA	30" Wide, 12" Radius, Horizontal Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	972.91	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-70.74*	
26 05 36 00-0293	EA	36" Wide, 12" Radius, Horizontal Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,101.06	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-80.04*	

26 05 36 00-0294 24" Radius, Horizontal Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0213)*

26 05 36 00-0295	EA	6" Wide, 24" Radius, Horizontal Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	772.48	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-57.64*	
26 05 36 00-0296	EA	9" Wide, 24" Radius, Horizontal Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	828.26	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-61.33*	
26 05 36 00-0297	EA	12" Wide, 24" Radius, Horizontal Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	864.06	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-63.85*	
26 05 36 00-0298	EA	18" Wide, 24" Radius, Horizontal Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	946.35	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-69.59*	
26 05 36 00-0299	EA	24" Wide, 24" Radius, Horizontal Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,049.30	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-76.73*	
26 05 36 00-0300	EA	30" Wide, 24" Radius, Horizontal Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,130.04	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-82.94*	
26 05 36 00-0301	EA	36" Wide, 24" Radius, Horizontal Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,371.82	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-102.45*	

26 05 36 00-0302 36" Radius, Horizontal Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0213)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0303	EA	6" Wide, 36" Radius, Horizontal Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	998.47	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-78.35*	
26 05 36 00-0304	EA	9" Wide, 36" Radius, Horizontal Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,065.07	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-82.77*	
26 05 36 00-0305	EA	12" Wide, 36" Radius, Horizontal Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,131.05	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-88.06*	
26 05 36 00-0306	EA	18" Wide, 36" Radius, Horizontal Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,241.24	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-95.92*	
26 05 36 00-0307	EA	24" Wide, 36" Radius, Horizontal Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,408.00	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-108.61*	
26 05 36 00-0308	EA	30" Wide, 36" Radius, Horizontal Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,527.55	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-118.03*	
26 05 36 00-0309	EA	36" Wide, 36" Radius, Horizontal Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,714.31	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-130.44*	

26 05 36 00-0310 12" Radius, Vertical Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0213)*

26 05 36 00-0311	EA	6" Wide, 12" Radius, Vertical Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	746.98	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-57.99*	
26 05 36 00-0312	EA	9" Wide, 12" Radius, Vertical Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	763.79	208.35
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-59.01*	
26 05 36 00-0313	EA	12" Wide, 12" Radius, Vertical Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	781.19	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-60.07*	
26 05 36 00-0314	EA	18" Wide, 12" Radius, Vertical Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	819.56	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-62.35*	
26 05 36 00-0315	EA	24" Wide, 12" Radius, Vertical Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	844.48	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-63.95*	
26 05 36 00-0316	EA	30" Wide, 12" Radius, Vertical Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	914.77	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-68.92*	
26 05 36 00-0317	EA	36" Wide, 12" Radius, Vertical Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	982.56	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-73.21*	

26 05 36 00-0318 24" Radius, Vertical Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0213)*

26 05 36 00-0319	EA	6" Wide, 24" Radius, Vertical Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,107.13	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-92.66*	
26 05 36 00-0320	EA	9" Wide, 24" Radius, Vertical Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,132.92	225.60
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-94.49*	
26 05 36 00-0321	EA	12" Wide, 24" Radius, Vertical Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,159.99	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-96.39*	
26 05 36 00-0322	EA	18" Wide, 24" Radius, Vertical Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,219.39	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-100.45*	
26 05 36 00-0323	EA	24" Wide, 24" Radius, Vertical Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,262.44	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-103.68*	
26 05 36 00-0324	EA	30" Wide, 24" Radius, Vertical Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,333.86	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-108.34*	
26 05 36 00-0325	EA	36" Wide, 24" Radius, Vertical Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,433.19	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-115.12*	

26 05 36 00-0326 36" Radius, Vertical Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0213)*

26 05 36 00-0327	EA	6" Wide, 36" Radius, Vertical Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,786.53	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-159.04*	
26 05 36 00-0328	EA	9" Wide, 36" Radius, Vertical Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,822.32	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-161.74*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0329	EA	12" Wide, 36" Radius, Vertical Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,860.42	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-164.55*	
26 05 36 00-0330	EA	18" Wide, 36" Radius, Vertical Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,923.39	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-168.60*	
26 05 36 00-0331	EA	24" Wide, 36" Radius, Vertical Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,967.64	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-171.72*	
26 05 36 00-0332	EA	30" Wide, 36" Radius, Vertical Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	2,085.08	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-180.31*	
26 05 36 00-0333	EA	36" Wide, 36" Radius, Vertical Tees, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	2,183.03	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-186.11*	

26 05 36 00-0334 12" Radius, Horizontal Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0213)*

26 05 36 00-0335	EA	6" Wide, 12" Radius, Horizontal Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	751.79	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-52.62*	
26 05 36 00-0336	EA	9" Wide, 12" Radius, Horizontal Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	789.83	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-55.25*	
26 05 36 00-0337	EA	12" Wide, 12" Radius, Horizontal Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	844.94	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-59.45*	
26 05 36 00-0338	EA	18" Wide, 12" Radius, Horizontal Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	907.72	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-64.22*	
26 05 36 00-0339	EA	24" Wide, 12" Radius, Horizontal Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,021.39	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-72.08*	
26 05 36 00-0340	EA	30" Wide, 12" Radius, Horizontal Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,147.24	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-82.53*	
26 05 36 00-0341	EA	36" Wide, 12" Radius, Horizontal Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,255.93	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-90.86*	

26 05 36 00-0342 24" Radius, Horizontal Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0213)*

26 05 36 00-0343	EA	6" Wide, 24" Radius, Horizontal Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,083.97	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-83.35*	
26 05 36 00-0344	EA	9" Wide, 24" Radius, Horizontal Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,132.26	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-86.67*	
26 05 36 00-0345	EA	12" Wide, 24" Radius, Horizontal Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,183.30	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-90.13*	
26 05 36 00-0346	EA	18" Wide, 24" Radius, Horizontal Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,260.41	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-95.98*	
26 05 36 00-0347	EA	24" Wide, 24" Radius, Horizontal Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,397.17	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-104.99*	
26 05 36 00-0348	EA	30" Wide, 24" Radius, Horizontal Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,501.67	451.20
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-112.57*	
26 05 36 00-0349	EA	36" Wide, 24" Radius, Horizontal Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,688.96	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-127.91*	

26 05 36 00-0350 36" Radius, Horizontal Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0213)*

26 05 36 00-0351	EA	6" Wide, 36" Radius, Horizontal Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,378.86	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-109.69*	
26 05 36 00-0352	EA	9" Wide, 36" Radius, Horizontal Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,452.36	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-115.17*	
26 05 36 00-0353	EA	12" Wide, 36" Radius, Horizontal Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,531.13	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-120.92*	
26 05 36 00-0354	EA	18" Wide, 36" Radius, Horizontal Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,672.42	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-132.51*	
26 05 36 00-0355	EA	24" Wide, 36" Radius, Horizontal Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,906.25	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-149.64*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0356	EA	30" Wide, 36" Radius, Horizontal Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	2,077.98	540.54
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-162.75*	
26 05 36 00-0357	EA	36" Wide, 36" Radius, Horizontal Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	2,271.13	602.13
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-176.93*	

26 05 36 00-0358 12" Radius, Vertical Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0213)*

26 05 36 00-0359	EA	6" Wide, 12" Radius, Vertical Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	887.06	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-66.15*	
26 05 36 00-0360	EA	9" Wide, 12" Radius, Vertical Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	931.78	284.94
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-69.43*	
26 05 36 00-0361	EA	12" Wide, 12" Radius, Vertical Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	999.68	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-74.93*	
26 05 36 00-0362	EA	18" Wide, 12" Radius, Vertical Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,077.41	318.78
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-81.18*	
26 05 36 00-0363	EA	24" Wide, 12" Radius, Vertical Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,210.44	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-90.98*	
26 05 36 00-0364	EA	30" Wide, 12" Radius, Vertical Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,374.07	386.46
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-105.20*	
26 05 36 00-0365	EA	36" Wide, 12" Radius, Vertical Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,507.69	416.23
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-116.08*	

26 05 36 00-0366 24" Radius, Vertical Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0213)*

26 05 36 00-0367	EA	6" Wide, 24" Radius, Vertical Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,346.36	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-109.59*	
26 05 36 00-0368	EA	9" Wide, 24" Radius, Vertical Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,402.79	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-113.73*	
26 05 36 00-0369	EA	12" Wide, 24" Radius, Vertical Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,461.98	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-118.00*	
26 05 36 00-0370	EA	18" Wide, 24" Radius, Vertical Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,557.02	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-125.64*	
26 05 36 00-0371	EA	24" Wide, 24" Radius, Vertical Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,713.34	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-136.61*	
26 05 36 00-0372	EA	30" Wide, 24" Radius, Vertical Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,839.03	451.20
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-146.30*	
26 05 36 00-0373	EA	36" Wide, 24" Radius, Vertical Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	2,080.09	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-167.02*	

26 05 36 00-0374 36" Radius, Vertical Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0213)*

26 05 36 00-0375	EA	6" Wide, 36" Radius, Vertical Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,745.55	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-146.36*	
26 05 36 00-0376	EA	9" Wide, 36" Radius, Vertical Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,835.34	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-153.47*	
26 05 36 00-0377	EA	12" Wide, 36" Radius, Vertical Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,930.42	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-160.85*	
26 05 36 00-0378	EA	18" Wide, 36" Radius, Vertical Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	2,112.44	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-176.52*	
26 05 36 00-0379	EA	24" Wide, 36" Radius, Vertical Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	2,395.17	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-198.53*	
26 05 36 00-0380	EA	30" Wide, 36" Radius, Vertical Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	2,607.64	540.54
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-215.72*	
26 05 36 00-0381	EA	36" Wide, 36" Radius, Vertical Crosses, 6" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	2,841.54	602.13
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-233.98*	

copyright 2026 The Gordian Group, Inc.

		MINOR CSI UOM DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0382		9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fittings *(26 05 36 00-0002)*		
26 05 36 00-0383		12" Radius, Horizontal 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0382)*		
26 05 36 00-0384	EA	6" Wide, 12" Radius, Horizontal 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	283.58	113.14
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-18.93*	
26 05 36 00-0385	EA	9" Wide, 12" Radius, Horizontal 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	317.39	128.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-21.00*	
26 05 36 00-0386	EA	12" Wide, 12" Radius, Horizontal 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	349.04	142.47
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-23.04*	
26 05 36 00-0387	EA	18" Wide, 12" Radius, Horizontal 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	435.88	174.62
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-29.04*	
26 05 36 00-0388	EA	24" Wide, 12" Radius, Horizontal 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	497.09	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-33.00*	
26 05 36 00-0389	EA	30" Wide, 12" Radius, Horizontal 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	590.28	225.60
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-40.23*	
26 05 36 00-0390	EA	36" Wide, 12" Radius, Horizontal 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	680.24	257.86
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-46.54*	
26 05 36 00-0391		24" Radius, Horizontal 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0382)*		
26 05 36 00-0392	EA	6" Wide, 24" Radius, Horizontal 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	392.28	117.65
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-29.42*	
26 05 36 00-0393	EA	9" Wide, 24" Radius, Horizontal 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	427.63	135.25
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-31.49*	
26 05 36 00-0394	EA	12" Wide, 24" Radius, Horizontal 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	460.42	150.37
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-33.51*	
26 05 36 00-0395	EA	18" Wide, 24" Radius, Horizontal 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	537.61	186.79
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-38.20*	
26 05 36 00-0396	EA	24" Wide, 24" Radius, Horizontal 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	604.03	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-42.35*	
26 05 36 00-0397	EA	30" Wide, 24" Radius, Horizontal 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	673.97	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-46.90*	
26 05 36 00-0398	EA	36" Wide, 24" Radius, Horizontal 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	788.62	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-55.12*	
26 05 36 00-0399		36" Radius, Horizontal 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0382)*		
26 05 36 00-0400	EA	6" Wide, 36" Radius, Horizontal 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	422.25	122.95
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-31.98*	
26 05 36 00-0401	EA	9" Wide, 36" Radius, Horizontal 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	466.54	142.36
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-34.80*	
26 05 36 00-0402	EA	12" Wide, 36" Radius, Horizontal 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	505.47	159.28
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-37.27*	
26 05 36 00-0403	EA	18" Wide, 36" Radius, Horizontal 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	608.76	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-44.17*	
26 05 36 00-0404	EA	24" Wide, 36" Radius, Horizontal 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	694.01	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-49.79*	
26 05 36 00-0405	EA	30" Wide, 36" Radius, Horizontal 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	813.36	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-58.78*	
26 05 36 00-0406	EA	36" Wide, 36" Radius, Horizontal 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	925.44	318.10
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-66.04*	
26 05 36 00-0407		12" Radius, Horizontal 45 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0382)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0408	EA	6" Wide, 12" Radius, Horizontal 45 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	210.56	82.01
		For 60 Degree Bend, Deduct	*-38.06*	
		For 30 Degree Bend, Deduct	*-67.99*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-14.23*	
26 05 36 00-0409	EA	9" Wide, 12" Radius, Horizontal 45 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	240.82	98.36
		For 60 Degree Bend, Deduct	*-41.78*	
		For 30 Degree Bend, Deduct	*-75.10*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-15.89*	
26 05 36 00-0410	EA	12" Wide, 12" Radius, Horizontal 45 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	267.98	112.80
		For 60 Degree Bend, Deduct	*-45.19*	
		For 30 Degree Bend, Deduct	*-81.59*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-17.40*	
26 05 36 00-0411	EA	18" Wide, 12" Radius, Horizontal 45 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	322.08	142.58
		For 60 Degree Bend, Deduct	*-51.64*	
		For 30 Degree Bend, Deduct	*-93.99*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-20.33*	
26 05 36 00-0412	EA	24" Wide, 12" Radius, Horizontal 45 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	399.67	174.62
		For 60 Degree Bend, Deduct	*-64.96*	
		For 30 Degree Bend, Deduct	*-117.96*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-25.42*	
26 05 36 00-0413	EA	30" Wide, 12" Radius, Horizontal 45 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	472.95	200.45
		For 60 Degree Bend, Deduct	*-79.23*	
		For 30 Degree Bend, Deduct	*-143.18*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-30.59*	
26 05 36 00-0414	EA	36" Wide, 12" Radius, Horizontal 45 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	537.07	235.30
		For 60 Degree Bend, Deduct	*-87.02*	
		For 30 Degree Bend, Deduct	*-158.12*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-34.10*	

26 05 36 00-0415 24" Radius, Horizontal 45 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0382)*

26 05 36 00-0416	EA	6" Wide, 24" Radius, Horizontal 45 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	234.50	84.60
		For 60 Degree Bend, Deduct	*-44.97*	
		For 30 Degree Bend, Deduct	*-79.65*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-16.40*	
26 05 36 00-0417	EA	9" Wide, 24" Radius, Horizontal 45 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	269.57	101.97
		For 60 Degree Bend, Deduct	*-49.86*	
		For 30 Degree Bend, Deduct	*-88.77*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-18.46*	
26 05 36 00-0418	EA	12" Wide, 24" Radius, Horizontal 45 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	307.92	117.76
		For 60 Degree Bend, Deduct	*-56.48*	
		For 30 Degree Bend, Deduct	*-100.67*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-20.98*	
26 05 36 00-0419	EA	18" Wide, 24" Radius, Horizontal 45 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	365.35	150.37
		For 60 Degree Bend, Deduct	*-62.91*	
		For 30 Degree Bend, Deduct	*-113.21*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-24.00*	
26 05 36 00-0420	EA	24" Wide, 24" Radius, Horizontal 45 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	450.09	186.79
		For 60 Degree Bend, Deduct	*-76.94*	
		For 30 Degree Bend, Deduct	*-138.61*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-29.45*	
26 05 36 00-0421	EA	30" Wide, 24" Radius, Horizontal 45 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	527.07	216.69
		For 60 Degree Bend, Deduct	*-90.88*	
		For 30 Degree Bend, Deduct	*-163.51*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-34.65*	
26 05 36 00-0422	EA	36" Wide, 24" Radius, Horizontal 45 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	620.01	257.97
		For 60 Degree Bend, Deduct	*-105.73*	
		For 30 Degree Bend, Deduct	*-190.55*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-40.51*	

26 05 36 00-0423 36" Radius, Horizontal 45 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0382)*

26 05 36 00-0424	EA	6" Wide, 36" Radius, Horizontal 45 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	279.74	87.31
		For 60 Degree Bend, Deduct	*-58.86*	
		For 30 Degree Bend, Deduct	*-102.95*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-20.70*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0425	EA	9" Wide, 36" Radius, Horizontal 45 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	318.54	106.03
		For 60 Degree Bend, Deduct	*-64.48*	
		For 30 Degree Bend, Deduct	*-113.36*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-23.02*	
26 05 36 00-0426	EA	12" Wide, 36" Radius, Horizontal 45 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	349.95	123.06
		For 60 Degree Bend, Deduct	*-68.31*	
		For 30 Degree Bend, Deduct	*-120.69*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-24.74*	
26 05 36 00-0427	EA	18" Wide, 36" Radius, Horizontal 45 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	422.48	159.28
		For 60 Degree Bend, Deduct	*-78.34*	
		For 30 Degree Bend, Deduct	*-139.43*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-28.97*	
26 05 36 00-0428	EA	24" Wide, 36" Radius, Horizontal 45 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	500.11	200.45
		For 60 Degree Bend, Deduct	*-88.19*	
		For 30 Degree Bend, Deduct	*-158.12*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-33.31*	
26 05 36 00-0429	EA	30" Wide, 36" Radius, Horizontal 45 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	606.49	235.30
		For 60 Degree Bend, Deduct	*-109.93*	
		For 30 Degree Bend, Deduct	*-196.30*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-41.04*	
26 05 36 00-0430	EA	36" Wide, 36" Radius, Horizontal 45 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	713.17	284.82
		For 60 Degree Bend, Deduct	*-126.15*	
		For 30 Degree Bend, Deduct	*-226.08*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-47.58*	

26 05 36 00-0431 12" Radius, Vertical 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0382)*

26 05 36 00-0432	EA	6" Wide, 12" Radius, Vertical 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	319.28	112.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-22.53*	
26 05 36 00-0433	EA	9" Wide, 12" Radius, Vertical 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	349.08	128.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-24.17*	
26 05 36 00-0434	EA	12" Wide, 12" Radius, Vertical 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	376.20	142.47
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-25.75*	
26 05 36 00-0435	EA	18" Wide, 12" Radius, Vertical 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	435.88	174.62
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-29.04*	
26 05 36 00-0436	EA	24" Wide, 12" Radius, Vertical 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	485.02	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-31.80*	
26 05 36 00-0437	EA	30" Wide, 12" Radius, Vertical 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	538.97	225.60
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-35.10*	
26 05 36 00-0438	EA	36" Wide, 12" Radius, Vertical 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	598.23	257.52
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-38.36*	

26 05 36 00-0439 24" Radius, Vertical 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0382)*

26 05 36 00-0440	EA	6" Wide, 24" Radius, Vertical 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	381.72	117.65
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-28.37*	
26 05 36 00-0441	EA	9" Wide, 24" Radius, Vertical 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	415.73	135.36
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-30.29*	
26 05 36 00-0442	EA	12" Wide, 24" Radius, Vertical 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	448.35	150.37
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-32.30*	
26 05 36 00-0443	EA	18" Wide, 24" Radius, Vertical 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	519.50	186.79
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-36.39*	
26 05 36 00-0444	EA	24" Wide, 24" Radius, Vertical 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	579.89	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.94*	
26 05 36 00-0445	EA	30" Wide, 24" Radius, Vertical 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	640.77	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-43.58*	
26 05 36 00-0446	EA	36" Wide, 24" Radius, Vertical 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	734.30	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-49.69*	

26 05 36 00-0447 36" Radius, Vertical 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0382)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0448	EA	6" Wide, 36" Radius, Vertical 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	455.44	122.95
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-35.30*	
26 05 36 00-0449	EA	9" Wide, 36" Radius, Vertical 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	496.92	142.47
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-37.82*	
26 05 36 00-0450	EA	12" Wide, 36" Radius, Vertical 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	528.11	159.28
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.53*	
26 05 36 00-0451	EA	18" Wide, 36" Radius, Vertical 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	617.81	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-45.08*	
26 05 36 00-0452	EA	24" Wide, 36" Radius, Vertical 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	678.92	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-48.28*	
26 05 36 00-0453	EA	30" Wide, 36" Radius, Vertical 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	777.15	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-55.16*	
26 05 36 00-0454	EA	36" Wide, 36" Radius, Vertical 90 Degree Elbows, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	877.15	318.10
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-61.21*	

26 05 36 00-0455 12" Radius, Horizontal Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0382)*

26 05 36 00-0456	EA	6" Wide, 12" Radius, Horizontal Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	563.29	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-38.28*	
26 05 36 00-0457	EA	9" Wide, 12" Radius, Horizontal Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	609.51	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-41.34*	
26 05 36 00-0458	EA	12" Wide, 12" Radius, Horizontal Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	639.26	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-43.43*	
26 05 36 00-0459	EA	18" Wide, 12" Radius, Horizontal Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	713.77	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-48.82*	
26 05 36 00-0460	EA	24" Wide, 12" Radius, Horizontal Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	808.73	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-55.83*	
26 05 36 00-0461	EA	30" Wide, 12" Radius, Horizontal Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	899.27	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-63.37*	
26 05 36 00-0462	EA	36" Wide, 12" Radius, Horizontal Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,017.77	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-71.71*	

26 05 36 00-0463 24" Radius, Horizontal Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0382)*

26 05 36 00-0464	EA	6" Wide, 24" Radius, Horizontal Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	709.10	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-51.30*	
26 05 36 00-0465	EA	9" Wide, 24" Radius, Horizontal Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	761.86	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-54.69*	
26 05 36 00-0466	EA	12" Wide, 24" Radius, Horizontal Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	795.25	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-56.97*	
26 05 36 00-0467	EA	18" Wide, 24" Radius, Horizontal Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	872.11	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-62.17*	
26 05 36 00-0468	EA	24" Wide, 24" Radius, Horizontal Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	968.41	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-68.64*	
26 05 36 00-0469	EA	30" Wide, 24" Radius, Horizontal Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,041.91	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-74.13*	
26 05 36 00-0470	EA	36" Wide, 24" Radius, Horizontal Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,258.95	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-91.17*	

26 05 36 00-0471 36" Radius, Horizontal Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0382)*

26 05 36 00-0472	EA	6" Wide, 36" Radius, Horizontal Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	903.71	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-68.88*	
26 05 36 00-0473	EA	9" Wide, 36" Radius, Horizontal Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	966.69	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-72.93*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0474	EA	12" Wide, 36" Radius, Horizontal Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,026.02	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-77.56*	
26 05 36 00-0475	EA	18" Wide, 36" Radius, Horizontal Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,128.37	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-84.64*	
26 05 36 00-0476	EA	24" Wide, 36" Radius, Horizontal Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,280.64	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-95.87*	
26 05 36 00-0477	EA	30" Wide, 36" Radius, Horizontal Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,388.72	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-104.14*	
26 05 36 00-0478	EA	36" Wide, 36" Radius, Horizontal Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,565.22	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-115.53*	

26 05 36 00-0479 12" Radius, Vertical Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0382)*

26 05 36 00-0480	EA	6" Wide, 12" Radius, Vertical Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	678.17	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-51.11*	
26 05 36 00-0481	EA	9" Wide, 12" Radius, Vertical Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	694.37	208.35
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-52.07*	
26 05 36 00-0482	EA	12" Wide, 12" Radius, Vertical Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	711.17	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-53.06*	
26 05 36 00-0483	EA	18" Wide, 12" Radius, Vertical Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	748.34	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-55.22*	
26 05 36 00-0484	EA	24" Wide, 12" Radius, Vertical Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	772.05	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-56.71*	
26 05 36 00-0485	EA	30" Wide, 12" Radius, Vertical Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	837.51	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-61.19*	
26 05 36 00-0486	EA	36" Wide, 12" Radius, Vertical Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	902.29	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-65.18*	

26 05 36 00-0487 24" Radius, Vertical Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0382)*

26 05 36 00-0488	EA	6" Wide, 24" Radius, Vertical Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	982.79	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-80.23*	
26 05 36 00-0489	EA	9" Wide, 24" Radius, Vertical Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,006.76	225.60
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-81.88*	
26 05 36 00-0490	EA	12" Wide, 24" Radius, Vertical Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,032.03	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-83.59*	
26 05 36 00-0491	EA	18" Wide, 24" Radius, Vertical Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,087.81	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-87.29*	
26 05 36 00-0492	EA	24" Wide, 24" Radius, Vertical Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,127.23	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-90.16*	
26 05 36 00-0493	EA	30" Wide, 24" Radius, Vertical Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,195.03	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-94.46*	
26 05 36 00-0494	EA	36" Wide, 24" Radius, Vertical Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,288.32	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-100.63*	

26 05 36 00-0495 36" Radius, Vertical Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0382)*

26 05 36 00-0496	EA	6" Wide, 36" Radius, Vertical Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,554.14	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-135.80*	
26 05 36 00-0497	EA	9" Wide, 36" Radius, Vertical Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,586.91	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-138.20*	
26 05 36 00-0498	EA	12" Wide, 36" Radius, Vertical Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,621.99	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-140.71*	
26 05 36 00-0499	EA	18" Wide, 36" Radius, Vertical Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,681.95	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-144.46*	
26 05 36 00-0500	EA	24" Wide, 36" Radius, Vertical Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,723.18	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-147.27*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0501	EA	30" Wide, 36" Radius, Vertical Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,831.56	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-154.96*	
26 05 36 00-0502	EA	36" Wide, 36" Radius, Vertical Tees, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,926.49	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-160.46*	

26 05 36 00-0503 12" Radius, Horizontal Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0382)*

26 05 36 00-0504	EA	6" Wide, 12" Radius, Horizontal Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	701.69	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-47.61*	
26 05 36 00-0505	EA	9" Wide, 12" Radius, Horizontal Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	737.32	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-49.99*	
26 05 36 00-0506	EA	12" Wide, 12" Radius, Horizontal Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	787.60	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-53.72*	
26 05 36 00-0507	EA	18" Wide, 12" Radius, Horizontal Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	844.94	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-57.94*	
26 05 36 00-0508	EA	24" Wide, 12" Radius, Horizontal Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	951.37	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-65.07*	
26 05 36 00-0509	EA	30" Wide, 12" Radius, Horizontal Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,063.34	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-74.14*	
26 05 36 00-0510	EA	36" Wide, 12" Radius, Horizontal Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,162.37	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-81.51*	

26 05 36 00-0511 24" Radius, Horizontal Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0382)*

26 05 36 00-0512	EA	6" Wide, 24" Radius, Horizontal Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	986.79	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-73.63*	
26 05 36 00-0513	EA	9" Wide, 24" Radius, Horizontal Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,032.06	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-76.65*	
26 05 36 00-0514	EA	12" Wide, 24" Radius, Horizontal Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,080.08	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-79.81*	
26 05 36 00-0515	EA	18" Wide, 24" Radius, Horizontal Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,150.56	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-84.99*	
26 05 36 00-0516	EA	24" Wide, 24" Radius, Horizontal Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,280.07	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-93.28*	
26 05 36 00-0517	EA	30" Wide, 24" Radius, Horizontal Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,376.73	451.20
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-100.07*	
26 05 36 00-0518	EA	36" Wide, 24" Radius, Horizontal Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,544.09	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-113.42*	

26 05 36 00-0519 36" Radius, Horizontal Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0382)*

26 05 36 00-0520	EA	6" Wide, 36" Radius, Horizontal Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,243.05	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-96.11*	
26 05 36 00-0521	EA	9" Wide, 36" Radius, Horizontal Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,310.51	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-100.99*	
26 05 36 00-0522	EA	12" Wide, 36" Radius, Horizontal Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,383.25	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-106.13*	
26 05 36 00-0523	EA	18" Wide, 36" Radius, Horizontal Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,509.44	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-116.22*	
26 05 36 00-0524	EA	24" Wide, 36" Radius, Horizontal Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,725.17	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-131.53*	
26 05 36 00-0525	EA	30" Wide, 36" Radius, Horizontal Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,881.81	540.54
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-143.13*	
26 05 36 00-0526	EA	36" Wide, 36" Radius, Horizontal Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	2,059.87	602.13
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-155.81*	

copyright 2026 The Gordian Group, Inc.

	MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0527			12" Radius, Vertical Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0382)*		
26 05 36 00-0528		EA	6" Wide, 12" Radius, Vertical Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	814.42	270.72
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-58.88*	
26 05 36 00-0529		EA	9" Wide, 12" Radius, Vertical Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	855.63	284.94
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-61.82*	
26 05 36 00-0530		EA	12" Wide, 12" Radius, Vertical Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	916.53	300.50
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-66.61*	
26 05 36 00-0531		EA	18" Wide, 12" Radius, Vertical Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	986.39	318.78
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-72.08*	
26 05 36 00-0532		EA	24" Wide, 12" Radius, Vertical Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,108.91	360.74
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-80.83*	
26 05 36 00-0533		EA	30" Wide, 12" Radius, Vertical Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,252.41	386.46
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-93.03*	
26 05 36 00-0534		EA	36" Wide, 12" Radius, Vertical Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,372.03	416.23
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-102.52*	
26 05 36 00-0535			24" Radius, Vertical Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0382)*		
26 05 36 00-0536		EA	6" Wide, 24" Radius, Vertical Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,205.44	300.50
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-95.50*	
26 05 36 00-0537		EA	9" Wide, 24" Radius, Vertical Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,257.51	318.66
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-99.20*	
26 05 36 00-0538		EA	12" Wide, 24" Radius, Vertical Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,312.32	338.40
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-103.03*	
26 05 36 00-0539		EA	18" Wide, 24" Radius, Vertical Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,397.73	360.74
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-109.71*	
26 05 36 00-0540		EA	24" Wide, 24" Radius, Vertical Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,543.55	416.80
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-119.63*	
26 05 36 00-0541		EA	30" Wide, 24" Radius, Vertical Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,657.86	451.20
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-128.19*	
26 05 36 00-0542		EA	36" Wide, 24" Radius, Vertical Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,870.04	491.81
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-146.02*	
26 05 36 00-0543			36" Radius, Vertical Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0382)*		
26 05 36 00-0544		EA	6" Wide, 36" Radius, Vertical Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,548.63	338.40
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-126.66*	
26 05 36 00-0545		EA	9" Wide, 36" Radius, Vertical Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,629.67	360.74
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-132.90*	
26 05 36 00-0546		EA	12" Wide, 36" Radius, Vertical Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,715.99	386.34
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-139.41*	
26 05 36 00-0547		EA	18" Wide, 36" Radius, Vertical Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,876.13	416.80
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-152.88*	
26 05 36 00-0548		EA	24" Wide, 36" Radius, Vertical Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	2,132.60	491.81
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-172.27*	
26 05 36 00-0549		EA	30" Wide, 36" Radius, Vertical Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	2,323.20	540.54
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-187.27*	
26 05 36 00-0550		EA	36" Wide, 36" Radius, Vertical Crosses, 9" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	2,535.21	602.13
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-203.34*	
26 05 36 00-0551			12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fittings *(26 05 36 00-0002)*		
26 05 36 00-0552			12" Radius, Horizontal 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0551)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0553	EA	6" Wide, 12" Radius, Horizontal 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	276.92	113.14
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-18.27*	
26 05 36 00-0554	EA	9" Wide, 12" Radius, Horizontal 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	310.21	128.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-20.28*	
26 05 36 00-0555	EA	12" Wide, 12" Radius, Horizontal 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	341.22	142.47
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-22.25*	
26 05 36 00-0556	EA	18" Wide, 12" Radius, Horizontal 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	425.74	174.62
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-28.02*	
26 05 36 00-0557	EA	24" Wide, 12" Radius, Horizontal 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	485.68	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-31.86*	
26 05 36 00-0558	EA	30" Wide, 12" Radius, Horizontal 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	575.28	225.60
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-38.73*	
26 05 36 00-0559	EA	36" Wide, 12" Radius, Horizontal 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	662.71	257.86
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-44.78*	

26 05 36 00-0560 24" Radius, Horizontal 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0551)*

26 05 36 00-0561	EA	6" Wide, 24" Radius, Horizontal 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	378.55	117.65
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-28.05*	
26 05 36 00-0562	EA	9" Wide, 24" Radius, Horizontal 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	413.47	135.25
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-30.08*	
26 05 36 00-0563	EA	12" Wide, 24" Radius, Horizontal 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	445.74	150.37
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-32.04*	
26 05 36 00-0564	EA	18" Wide, 24" Radius, Horizontal 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	521.77	186.79
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-36.61*	
26 05 36 00-0565	EA	24" Wide, 24" Radius, Horizontal 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	587.02	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-40.65*	
26 05 36 00-0566	EA	30" Wide, 24" Radius, Horizontal 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	655.48	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-45.05*	
26 05 36 00-0567	EA	36" Wide, 24" Radius, Horizontal 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	766.65	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-52.93*	

26 05 36 00-0568 36" Radius, Horizontal 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0551)*

26 05 36 00-0569	EA	6" Wide, 36" Radius, Horizontal 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	407.04	122.95
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-30.46*	
26 05 36 00-0570	EA	9" Wide, 36" Radius, Horizontal 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	450.48	142.36
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-33.19*	
26 05 36 00-0571	EA	12" Wide, 36" Radius, Horizontal 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	488.68	159.28
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-35.59*	
26 05 36 00-0572	EA	18" Wide, 36" Radius, Horizontal 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	589.53	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-42.25*	
26 05 36 00-0573	EA	24" Wide, 36" Radius, Horizontal 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	672.88	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-47.68*	
26 05 36 00-0574	EA	30" Wide, 36" Radius, Horizontal 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	788.01	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-56.24*	
26 05 36 00-0575	EA	36" Wide, 36" Radius, Horizontal 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	897.76	318.10
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-63.27*	

26 05 36 00-0576 12" Radius, Horizontal 45 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0551)*

26 05 36 00-0577	EA	6" Wide, 12" Radius, Horizontal 45 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	205.39	82.01
		For 60 Degree Bend, Deduct	*-36.36*	
		For 30 Degree Bend, Deduct	*-65.15*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-13.71*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0578	EA	9" Wide, 12" Radius, Horizontal 45 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	235.43	98.36
		For 60 Degree Bend, Deduct	*-40.00*	
		For 30 Degree Bend, Deduct	*-72.14*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-15.35*	
26 05 36 00-0579	EA	12" Wide, 12" Radius, Horizontal 45 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	262.38	112.80
		For 60 Degree Bend, Deduct	*-43.35*	
		For 30 Degree Bend, Deduct	*-78.51*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-16.84*	
26 05 36 00-0580	EA	18" Wide, 12" Radius, Horizontal 45 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	316.17	142.58
		For 60 Degree Bend, Deduct	*-49.69*	
		For 30 Degree Bend, Deduct	*-90.74*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-19.74*	
26 05 36 00-0581	EA	24" Wide, 12" Radius, Horizontal 45 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	392.06	174.62
		For 60 Degree Bend, Deduct	*-62.45*	
		For 30 Degree Bend, Deduct	*-113.78*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-24.66*	
26 05 36 00-0582	EA	30" Wide, 12" Radius, Horizontal 45 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	463.23	200.45
		For 60 Degree Bend, Deduct	*-76.02*	
		For 30 Degree Bend, Deduct	*-137.83*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-29.62*	
26 05 36 00-0583	EA	36" Wide, 12" Radius, Horizontal 45 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	526.93	235.30
		For 60 Degree Bend, Deduct	*-83.68*	
		For 30 Degree Bend, Deduct	*-152.54*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-33.08*	

26 05 36 00-0584 24" Radius, Horizontal 45 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0551)*

26 05 36 00-0585	EA	6" Wide, 24" Radius, Horizontal 45 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	227.95	84.60
		For 60 Degree Bend, Deduct	*-42.81*	
		For 30 Degree Bend, Deduct	*-76.04*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-15.75*	
26 05 36 00-0586	EA	9" Wide, 24" Radius, Horizontal 45 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	262.60	101.97
		For 60 Degree Bend, Deduct	*-47.56*	
		For 30 Degree Bend, Deduct	*-84.94*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-17.76*	
26 05 36 00-0587	EA	12" Wide, 24" Radius, Horizontal 45 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	300.10	117.76
		For 60 Degree Bend, Deduct	*-53.90*	
		For 30 Degree Bend, Deduct	*-96.37*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-20.20*	
26 05 36 00-0588	EA	18" Wide, 24" Radius, Horizontal 45 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	357.33	150.37
		For 60 Degree Bend, Deduct	*-60.26*	
		For 30 Degree Bend, Deduct	*-108.80*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-23.20*	
26 05 36 00-0589	EA	24" Wide, 24" Radius, Horizontal 45 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	440.37	186.79
		For 60 Degree Bend, Deduct	*-73.73*	
		For 30 Degree Bend, Deduct	*-133.26*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-28.47*	
26 05 36 00-0590	EA	30" Wide, 24" Radius, Horizontal 45 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	515.45	216.69
		For 60 Degree Bend, Deduct	*-87.05*	
		For 30 Degree Bend, Deduct	*-157.12*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-33.49*	
26 05 36 00-0591	EA	36" Wide, 24" Radius, Horizontal 45 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	606.71	257.97
		For 60 Degree Bend, Deduct	*-101.34*	
		For 30 Degree Bend, Deduct	*-183.23*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.18*	

26 05 36 00-0592 36" Radius, Horizontal 45 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0551)*

26 05 36 00-0593	EA	6" Wide, 36" Radius, Horizontal 45 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	270.34	87.31
		For 60 Degree Bend, Deduct	*-55.76*	
		For 30 Degree Bend, Deduct	*-97.78*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-19.76*	
26 05 36 00-0594	EA	9" Wide, 36" Radius, Horizontal 45 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	308.61	106.03
		For 60 Degree Bend, Deduct	*-61.20*	
		For 30 Degree Bend, Deduct	*-107.89*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-22.03*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0595	EA	12" Wide, 36" Radius, Horizontal 45 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	339.81	123.06
		For 60 Degree Bend, Deduct	*-64.97*	
		For 30 Degree Bend, Deduct	*-115.11*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-23.73*	
26 05 36 00-0596	EA	18" Wide, 36" Radius, Horizontal 45 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	411.49	159.28
		For 60 Degree Bend, Deduct	*-74.72*	
		For 30 Degree Bend, Deduct	*-133.38*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-27.87*	
26 05 36 00-0597	EA	24" Wide, 36" Radius, Horizontal 45 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	488.49	200.45
		For 60 Degree Bend, Deduct	*-84.35*	
		For 30 Degree Bend, Deduct	*-151.73*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-32.14*	
26 05 36 00-0598	EA	30" Wide, 36" Radius, Horizontal 45 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	591.49	235.30
		For 60 Degree Bend, Deduct	*-104.98*	
		For 30 Degree Bend, Deduct	*-188.05*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.54*	
26 05 36 00-0599	EA	36" Wide, 36" Radius, Horizontal 45 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	696.48	284.82
		For 60 Degree Bend, Deduct	*-120.65*	
		For 30 Degree Bend, Deduct	*-216.90*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-45.91*	

26 05 36 00-0600 12" Radius, Vertical 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0551)*

26 05 36 00-0601	EA	6" Wide, 12" Radius, Vertical 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	310.09	112.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-21.61*	
26 05 36 00-0602	EA	9" Wide, 12" Radius, Vertical 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	339.68	128.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-23.23*	
26 05 36 00-0603	EA	12" Wide, 12" Radius, Vertical 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	366.48	142.47
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-24.78*	
26 05 36 00-0604	EA	18" Wide, 12" Radius, Vertical 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	425.74	174.62
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-28.02*	
26 05 36 00-0605	EA	24" Wide, 12" Radius, Vertical 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	474.46	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-30.74*	
26 05 36 00-0606	EA	30" Wide, 12" Radius, Vertical 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	527.56	225.60
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-33.96*	
26 05 36 00-0607	EA	36" Wide, 12" Radius, Vertical 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	586.40	257.52
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-37.18*	

26 05 36 00-0608 24" Radius, Vertical 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0551)*

26 05 36 00-0609	EA	6" Wide, 24" Radius, Vertical 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	368.73	117.65
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-27.07*	
26 05 36 00-0610	EA	9" Wide, 24" Radius, Vertical 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	402.43	135.36
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-28.96*	
26 05 36 00-0611	EA	12" Wide, 24" Radius, Vertical 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	434.51	150.37
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-30.92*	
26 05 36 00-0612	EA	18" Wide, 24" Radius, Vertical 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	504.93	186.79
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-34.93*	
26 05 36 00-0613	EA	24" Wide, 24" Radius, Vertical 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	564.57	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-38.40*	
26 05 36 00-0614	EA	30" Wide, 24" Radius, Vertical 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	624.61	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-41.97*	
26 05 36 00-0615	EA	36" Wide, 24" Radius, Vertical 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	716.13	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-47.88*	

26 05 36 00-0616 36" Radius, Vertical 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0551)*

26 05 36 00-0617	EA	6" Wide, 36" Radius, Vertical 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	437.91	122.95
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-33.54*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0618	EA	9" Wide, 36" Radius, Vertical 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	478.75	142.47
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-36.01*	
26 05 36 00-0619	EA	12" Wide, 36" Radius, Vertical 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	509.73	159.28
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-37.70*	
26 05 36 00-0620	EA	18" Wide, 36" Radius, Vertical 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	597.95	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-43.09*	
26 05 36 00-0621	EA	24" Wide, 36" Radius, Vertical 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	658.85	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-46.27*	
26 05 36 00-0622	EA	30" Wide, 36" Radius, Vertical 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	754.33	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-52.87*	
26 05 36 00-0623	EA	36" Wide, 36" Radius, Vertical 90 Degree Elbows, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	852.86	318.10
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-58.78*	

26 05 36 00-0624 12" Radius, Horizontal Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0551)*

26 05 36 00-0625	EA	6" Wide, 12" Radius, Horizontal Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	543.07	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-36.25*	
26 05 36 00-0626	EA	9" Wide, 12" Radius, Horizontal Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	587.78	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.17*	
26 05 36 00-0627	EA	12" Wide, 12" Radius, Horizontal Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	616.32	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-41.14*	
26 05 36 00-0628	EA	18" Wide, 12" Radius, Horizontal Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	687.51	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-46.19*	
26 05 36 00-0629	EA	24" Wide, 12" Radius, Horizontal Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	777.94	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-52.75*	
26 05 36 00-0630	EA	30" Wide, 12" Radius, Horizontal Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	862.45	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-59.69*	
26 05 36 00-0631	EA	36" Wide, 12" Radius, Horizontal Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	976.12	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-67.55*	

26 05 36 00-0632 24" Radius, Horizontal Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0551)*

26 05 36 00-0633	EA	6" Wide, 24" Radius, Horizontal Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	677.41	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-48.13*	
26 05 36 00-0634	EA	9" Wide, 24" Radius, Horizontal Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	728.66	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-51.37*	
26 05 36 00-0635	EA	12" Wide, 24" Radius, Horizontal Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	760.85	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-53.53*	
26 05 36 00-0636	EA	18" Wide, 24" Radius, Horizontal Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	834.98	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-58.45*	
26 05 36 00-0637	EA	24" Wide, 24" Radius, Horizontal Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	927.97	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-64.60*	
26 05 36 00-0638	EA	30" Wide, 24" Radius, Horizontal Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	997.85	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-69.72*	
26 05 36 00-0639	EA	36" Wide, 24" Radius, Horizontal Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,202.51	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-85.52*	

26 05 36 00-0640 36" Radius, Horizontal Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0551)*

26 05 36 00-0641	EA	6" Wide, 36" Radius, Horizontal Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	856.32	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-64.14*	
26 05 36 00-0642	EA	9" Wide, 36" Radius, Horizontal Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	917.49	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-68.01*	
26 05 36 00-0643	EA	12" Wide, 36" Radius, Horizontal Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	973.51	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-72.31*	
26 05 36 00-0644	EA	18" Wide, 36" Radius, Horizontal Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,071.93	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-78.99*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0645	EA	24" Wide, 36" Radius, Horizontal Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,216.96	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-89.50*	
26 05 36 00-0646	EA	30" Wide, 36" Radius, Horizontal Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,319.31	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-97.20*	
26 05 36 00-0647	EA	36" Wide, 36" Radius, Horizontal Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,490.67	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-108.08*	

26 05 36 00-0648 12" Radius, Vertical Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0551)*

26 05 36 00-0649	EA	6" Wide, 12" Radius, Vertical Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	643.77	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-47.67*	
26 05 36 00-0650	EA	9" Wide, 12" Radius, Vertical Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	659.66	208.35
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-48.60*	
26 05 36 00-0651	EA	12" Wide, 12" Radius, Vertical Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	676.16	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-49.56*	
26 05 36 00-0652	EA	18" Wide, 12" Radius, Vertical Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	712.72	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-51.66*	
26 05 36 00-0653	EA	24" Wide, 12" Radius, Vertical Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	735.84	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-53.09*	
26 05 36 00-0654	EA	30" Wide, 12" Radius, Vertical Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	798.87	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-57.33*	
26 05 36 00-0655	EA	36" Wide, 12" Radius, Vertical Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	862.15	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-61.17*	

26 05 36 00-0656 24" Radius, Vertical Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0551)*

26 05 36 00-0657	EA	6" Wide, 24" Radius, Vertical Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	920.62	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-74.01*	
26 05 36 00-0658	EA	9" Wide, 24" Radius, Vertical Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	943.69	225.60
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-75.57*	
26 05 36 00-0659	EA	12" Wide, 24" Radius, Vertical Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	968.05	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-77.19*	
26 05 36 00-0660	EA	18" Wide, 24" Radius, Vertical Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,022.01	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-80.71*	
26 05 36 00-0661	EA	24" Wide, 24" Radius, Vertical Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,059.63	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-83.40*	
26 05 36 00-0662	EA	30" Wide, 24" Radius, Vertical Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,125.62	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-87.52*	
26 05 36 00-0663	EA	36" Wide, 24" Radius, Vertical Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,215.89	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-93.39*	

26 05 36 00-0664 36" Radius, Vertical Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0551)*

26 05 36 00-0665	EA	6" Wide, 36" Radius, Vertical Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,437.95	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-124.18*	
26 05 36 00-0666	EA	9" Wide, 36" Radius, Vertical Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,469.21	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-126.43*	
26 05 36 00-0667	EA	12" Wide, 36" Radius, Vertical Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,502.78	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-128.78*	
26 05 36 00-0668	EA	18" Wide, 36" Radius, Vertical Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,561.23	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-132.39*	
26 05 36 00-0669	EA	24" Wide, 36" Radius, Vertical Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,600.95	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-135.05*	
26 05 36 00-0670	EA	30" Wide, 36" Radius, Vertical Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,704.81	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-142.28*	
26 05 36 00-0671	EA	36" Wide, 36" Radius, Vertical Tees, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,798.23	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-147.63*	

copyright 2026 The Gordian Group, Inc.

CSI	MINOR UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0672		12" Radius, Horizontal Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0551)*		
26 05 36 00-0673	EA	6" Wide, 12" Radius, Horizontal Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	676.65	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-45.11*	
26 05 36 00-0674	EA	9" Wide, 12" Radius, Horizontal Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	711.06	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-47.37*	
26 05 36 00-0675	EA	12" Wide, 12" Radius, Horizontal Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	758.93	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-50.85*	
26 05 36 00-0676	EA	18" Wide, 12" Radius, Horizontal Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	813.56	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-54.80*	
26 05 36 00-0677	EA	24" Wide, 12" Radius, Horizontal Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	916.36	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-61.57*	
26 05 36 00-0678	EA	30" Wide, 12" Radius, Horizontal Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,021.39	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-69.95*	
26 05 36 00-0679	EA	36" Wide, 12" Radius, Horizontal Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,115.59	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-76.83*	
26 05 36 00-0680		24" Radius, Horizontal Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0551)*		
26 05 36 00-0681	EA	6" Wide, 24" Radius, Horizontal Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	938.20	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-68.78*	
26 05 36 00-0682	EA	9" Wide, 24" Radius, Horizontal Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	981.96	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-71.64*	
26 05 36 00-0683	EA	12" Wide, 24" Radius, Horizontal Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,028.47	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-74.65*	
26 05 36 00-0684	EA	18" Wide, 24" Radius, Horizontal Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,095.63	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-79.50*	
26 05 36 00-0685	EA	24" Wide, 24" Radius, Horizontal Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,221.52	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-87.42*	
26 05 36 00-0686	EA	30" Wide, 24" Radius, Horizontal Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,314.26	451.20
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-93.83*	
26 05 36 00-0687	EA	36" Wide, 24" Radius, Horizontal Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,471.66	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-106.18*	
26 05 36 00-0688		36" Radius, Horizontal Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0551)*		
26 05 36 00-0689	EA	6" Wide, 36" Radius, Horizontal Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,175.15	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-89.32*	
26 05 36 00-0690	EA	9" Wide, 36" Radius, Horizontal Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,239.59	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-93.90*	
26 05 36 00-0691	EA	12" Wide, 36" Radius, Horizontal Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,309.31	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-98.74*	
26 05 36 00-0692	EA	18" Wide, 36" Radius, Horizontal Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,427.96	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-108.07*	
26 05 36 00-0693	EA	24" Wide, 36" Radius, Horizontal Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,634.63	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-122.47*	
26 05 36 00-0694	EA	30" Wide, 36" Radius, Horizontal Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,783.73	540.54
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-133.33*	
26 05 36 00-0695	EA	36" Wide, 36" Radius, Horizontal Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,954.24	602.13
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-145.25*	
26 05 36 00-0696		12" Radius, Vertical Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting *(26 05 36 00-0551)*		
26 05 36 00-0697	EA	6" Wide, 12" Radius, Vertical Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	778.10	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-55.25*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0698	EA	9" Wide, 12" Radius, Vertical Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	817.56	284.94
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-58.01*	
26 05 36 00-0699	EA	12" Wide, 12" Radius, Vertical Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	874.96	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-62.46*	
26 05 36 00-0700	EA	18" Wide, 12" Radius, Vertical Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	940.87	318.78
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-67.52*	
26 05 36 00-0701	EA	24" Wide, 12" Radius, Vertical Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,058.15	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-75.75*	
26 05 36 00-0702	EA	30" Wide, 12" Radius, Vertical Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,191.58	386.46
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-86.95*	
26 05 36 00-0703	EA	36" Wide, 12" Radius, Vertical Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,304.20	416.23
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-95.73*	
26 05 36 00-0704		**24" Radius, Vertical Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting** *(26 05 36 00-0551)*		
26 05 36 00-0705	EA	6" Wide, 24" Radius, Vertical Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,134.99	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-88.45*	
26 05 36 00-0706	EA	9" Wide, 24" Radius, Vertical Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,184.86	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-91.93*	
26 05 36 00-0707	EA	12" Wide, 24" Radius, Vertical Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,237.48	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-95.55*	
26 05 36 00-0708	EA	18" Wide, 24" Radius, Vertical Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,318.09	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-101.75*	
26 05 36 00-0709	EA	24" Wide, 24" Radius, Vertical Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,458.65	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-111.14*	
26 05 36 00-0710	EA	30" Wide, 24" Radius, Vertical Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,567.27	451.20
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-119.13*	
26 05 36 00-0711	EA	36" Wide, 24" Radius, Vertical Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,765.01	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-135.51*	
26 05 36 00-0712		**36" Radius, Vertical Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting** *(26 05 36 00-0551)*		
26 05 36 00-0713	EA	6" Wide, 36" Radius, Vertical Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,450.16	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-116.82*	
26 05 36 00-0714	EA	9" Wide, 36" Radius, Vertical Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,526.83	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-122.62*	
26 05 36 00-0715	EA	12" Wide, 36" Radius, Vertical Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,608.77	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-128.69*	
26 05 36 00-0716	EA	18" Wide, 36" Radius, Vertical Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	1,757.98	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-141.07*	
26 05 36 00-0717	EA	24" Wide, 36" Radius, Vertical Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	2,001.32	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-159.14*	
26 05 36 00-0718	EA	30" Wide, 36" Radius, Vertical Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	2,180.97	540.54
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-173.05*	
26 05 36 00-0719	EA	36" Wide, 36" Radius, Vertical Crosses, 12" Rung Spacing, 4-5/8" High, Ladder Bottom Galvanized Steel Cable Tray Fitting	2,382.05	602.13
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-188.03*	
26 05 36 00-0720		**Dropout Or End Plates And Reducers** *(26 05 36 00-0002)*		
26 05 36 00-0721		**Straight Reducers** *(26 05 36 00-0720)*		
26 05 36 00-0722	EA	9" To 6" Reducer, Steel Cable Tray	277.61	83.25
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-20.82*	
26 05 36 00-0723	EA	12" To 9" Reducer, Steel Cable Tray	292.09	90.12
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-21.70*	
26 05 36 00-0724	EA	18" To 12" Reducer, Steel Cable Tray	315.28	104.00
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-22.86*	
26 05 36 00-0725	EA	24" To 18" Reducer, Steel Cable Tray	345.43	120.36
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-24.51*	
26 05 36 00-0726	EA	30" To 24" Reducer, Steel Cable Tray	373.48	135.36
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-26.07*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0727	EA	36" To 30" Reducer, Steel Cable Tray	423.76	154.65
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-29.49*	

26 05 36 00-0728 Reducers *(26 05 36 00-0720)*

26 05 36 00-0729	EA	18" To 6" Reducer, Steel Cable Tray	321.42	104.12
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-23.47*	
26 05 36 00-0730	EA	24" To 12" Reducer, Steel Cable Tray	351.76	120.47
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-25.13*	
26 05 36 00-0731	EA	30" To 12" Reducer, Steel Cable Tray	385.37	135.25
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-27.27*	
26 05 36 00-0732	EA	30" To 18" Reducer, Steel Cable Tray	391.23	135.13
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-27.86*	
26 05 36 00-0733	EA	36" To 12" Reducer, Steel Cable Tray	426.78	154.65
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-29.79*	
26 05 36 00-0734	EA	36" To 18" Reducer, Steel Cable Tray	439.58	158.71
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-30.73*	
26 05 36 00-0735	EA	36" To 24" Reducer, Steel Cable Tray	454.07	163.79
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-31.76*	

26 05 36 00-0736 Dropout Or End Plate *(26 05 36 00-0720)*

26 05 36 00-0737	EA	6" Dropout Or End Plate, Steel Cable Tray	71.94	33.84
26 05 36 00-0738	EA	9" Dropout Or End Plate, Steel Cable Tray	82.67	38.69
26 05 36 00-0739	EA	12" Dropout Or End Plate, Steel Cable Tray	89.29	41.62
26 05 36 00-0740	EA	18" Dropout Or End Plate, Steel Cable Tray	105.40	49.18
26 05 36 00-0741	EA	24" Dropout Or End Plate, Steel Cable Tray	118.61	54.15
26 05 36 00-0742	EA	30" Dropout Or End Plate, Steel Cable Tray	131.38	60.12
26 05 36 00-0743	EA	36" Dropout Or End Plate, Steel Cable Tray	148.41	67.68

26 05 36 00-0744 Ladder Bottom Aluminum Cable Tray *(26 05 36 00-0001)*

Note: 4-5/8" Height

26 05 36 00-0745 Straight Tray Sections *(26 05 36 00-0744)*

26 05 36 00-0746 4" Rung Spacing *(26 05 36 00-0745)*

26 05 36 00-0747	LF	6" Aluminum Cable Tray, 4" Rung Spacing, Straight Section	122.63	7.90
		For Class 12C Instead Of Class 12B, Add	*17.07*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-11.60*	
		For 6" Overall Height Instead Of 4-5/8", Add	*6.13*	
26 05 36 00-0748	LF	9" Aluminum Cable Tray, 4" Rung Spacing, Straight Section	129.70	8.35
		For Class 12C Instead Of Class 12B, Add	*18.07*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-12.28*	
		For 6" Overall Height Instead Of 4-5/8", Add	*6.49*	
26 05 36 00-0749	LF	12" Aluminum Cable Tray, 4" Rung Spacing, Straight Section	136.76	8.68
		For Class 12C Instead Of Class 12B, Add	*19.06*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-12.95*	
		For 6" Overall Height Instead Of 4-5/8", Add	*6.84*	
26 05 36 00-0750	LF	18" Aluminum Cable Tray, 4" Rung Spacing, Straight Section	152.00	9.47
		For Class 12C Instead Of Class 12B, Add	*21.21*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-14.41*	
		For 6" Overall Height Instead Of 4-5/8", Add	*7.60*	
26 05 36 00-0751	LF	24" Aluminum Cable Tray, 4" Rung Spacing, Straight Section	175.90	10.15
		For Class 12C Instead Of Class 12B, Add	*24.70*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-16.75*	
		For 6" Overall Height Instead Of 4-5/8", Add	*8.80*	
26 05 36 00-0752	LF	30" Aluminum Cable Tray, 4" Rung Spacing, Straight Section	193.06	10.83
		For Class 12C Instead Of Class 12B, Add	*27.16*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-18.41*	
		For 6" Overall Height Instead Of 4-5/8", Add	*9.65*	
26 05 36 00-0753	LF	36" Aluminum Cable Tray, 4" Rung Spacing, Straight Section	208.18	11.51
		For Class 12C Instead Of Class 12B, Add	*29.31*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-19.86*	
		For 6" Overall Height Instead Of 4-5/8", Add	*10.41*	

26 05 36 00-0754 6" Rung Spacing *(26 05 36 00-0745)*

26 05 36 00-0755	LF	6" Aluminum Cable Tray, 6" Rung Spacing, Straight Section	112.68	7.90
		For Class 12C Instead Of Class 12B, Add	*15.58*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-10.61*	
		For 6" Overall Height Instead Of 4-5/8", Add	*5.63*	
26 05 36 00-0756	LF	9" Aluminum Cable Tray, 6" Rung Spacing, Straight Section	119.17	8.35
		For Class 12C Instead Of Class 12B, Add	*16.49*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-11.22*	
		For 6" Overall Height Instead Of 4-5/8", Add	*5.96*	
26 05 36 00-0757	LF	12" Aluminum Cable Tray, 6" Rung Spacing, Straight Section	125.64	8.68
		For Class 12C Instead Of Class 12B, Add	*17.39*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-11.84*	
		For 6" Overall Height Instead Of 4-5/8", Add	*6.28*	
26 05 36 00-0758	LF	18" Aluminum Cable Tray, 6" Rung Spacing, Straight Section	139.62	9.47
		For Class 12C Instead Of Class 12B, Add	*19.36*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-13.17*	
		For 6" Overall Height Instead Of 4-5/8", Add	*6.98*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0759	LF	24" Aluminum Cable Tray, 6" Rung Spacing, Straight Section	161.44	10.15
		For Class 12C Instead Of Class 12B, Add	*22.53*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-15.30*	
		For 6" Overall Height Instead Of 4-5/8", Add	*8.07*	
26 05 36 00-0760	LF	30" Aluminum Cable Tray, 6" Rung Spacing, Straight Section	177.15	10.83
		For Class 12C Instead Of Class 12B, Add	*24.77*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-16.82*	
		For 6" Overall Height Instead Of 4-5/8", Add	*8.86*	
26 05 36 00-0761	LF	36" Aluminum Cable Tray, 6" Rung Spacing, Straight Section	191.00	11.51
		For Class 12C Instead Of Class 12B, Add	*26.73*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-18.14*	
		For 6" Overall Height Instead Of 4-5/8", Add	*9.55*	
26 05 36 00-0762		**9" Rung Spacing** *(26 05 36 00-0745)*		
26 05 36 00-0763	LF	6" Aluminum Cable Tray, 9" Rung Spacing, Straight Section	100.00	7.56
		For Class 12C Instead Of Class 12B, Add	*13.74*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-9.37*	
		For 6" Overall Height Instead Of 4-5/8", Add	*5.00*	
26 05 36 00-0764	LF	9" Aluminum Cable Tray, 9" Rung Spacing, Straight Section	101.03	7.90
		For Class 12C Instead Of Class 12B, Add	*13.83*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-9.44*	
		For 6" Overall Height Instead Of 4-5/8", Add	*5.05*	
26 05 36 00-0765	LF	12" Aluminum Cable Tray, 9" Rung Spacing, Straight Section	108.47	8.35
		For Class 12C Instead Of Class 12B, Add	*14.89*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-10.16*	
		For 6" Overall Height Instead Of 4-5/8", Add	*5.42*	
26 05 36 00-0766	LF	18" Aluminum Cable Tray, 9" Rung Spacing, Straight Section	115.79	8.91
		For Class 12C Instead Of Class 12B, Add	*15.88*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-10.84*	
		For 6" Overall Height Instead Of 4-5/8", Add	*5.79*	
26 05 36 00-0767	LF	24" Aluminum Cable Tray, 9" Rung Spacing, Straight Section	131.85	9.25
		For Class 12C Instead Of Class 12B, Add	*18.24*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-12.42*	
		For 6" Overall Height Instead Of 4-5/8", Add	*6.59*	
26 05 36 00-0768	LF	30" Aluminum Cable Tray, 9" Rung Spacing, Straight Section	146.20	9.92
		For Class 12C Instead Of Class 12B, Add	*20.27*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-13.79*	
		For 6" Overall Height Instead Of 4-5/8", Add	*7.31*	
26 05 36 00-0769	LF	36" Aluminum Cable Tray, 9" Rung Spacing, Straight Section	154.92	10.83
		For Class 12C Instead Of Class 12B, Add	*21.43*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-14.59*	
		For 6" Overall Height Instead Of 4-5/8", Add	*7.75*	
26 05 36 00-0770		**12" Rung Spacing** *(26 05 36 00-0745)*		
26 05 36 00-0771	LF	6" Aluminum Cable Tray, 12" Rung Spacing, Straight Section	98.10	7.33
		For Class 12C Instead Of Class 12B, Add	*13.49*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-9.20*	
		For 6" Overall Height Instead Of 4-5/8", Add	*4.91*	
26 05 36 00-0772	LF	9" Aluminum Cable Tray, 12" Rung Spacing, Straight Section	99.03	7.56
		For Class 12C Instead Of Class 12B, Add	*13.59*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-9.27*	
		For 6" Overall Height Instead Of 4-5/8", Add	*4.95*	
26 05 36 00-0773	LF	12" Aluminum Cable Tray, 12" Rung Spacing, Straight Section	102.68	8.01
		For Class 12C Instead Of Class 12B, Add	*14.06*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-9.60*	
		For 6" Overall Height Instead Of 4-5/8", Add	*5.13*	
26 05 36 00-0774	LF	18" Aluminum Cable Tray, 12" Rung Spacing, Straight Section	108.80	8.46
		For Class 12C Instead Of Class 12B, Add	*14.90*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-10.17*	
		For 6" Overall Height Instead Of 4-5/8", Add	*5.44*	
26 05 36 00-0775	LF	24" Aluminum Cable Tray, 12" Rung Spacing, Straight Section	119.67	8.57
		For Class 12C Instead Of Class 12B, Add	*16.51*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-11.25*	
		For 6" Overall Height Instead Of 4-5/8", Add	*5.98*	
26 05 36 00-0776	LF	30" Aluminum Cable Tray, 12" Rung Spacing, Straight Section	128.32	9.47
		For Class 12C Instead Of Class 12B, Add	*17.67*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-12.05*	
		For 6" Overall Height Instead Of 4-5/8", Add	*6.42*	
26 05 36 00-0777	LF	36" Aluminum Cable Tray, 12" Rung Spacing, Straight Section	135.47	10.26
		For Class 12C Instead Of Class 12B, Add	*18.61*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-12.69*	
		For 6" Overall Height Instead Of 4-5/8", Add	*6.77*	
26 05 36 00-0778		**18" Rung Spacing** *(26 05 36 00-0745)*		
26 05 36 00-0779	LF	6" Aluminum Cable Tray, 18" Rung Spacing, Straight Section	97.29	7.11
		For Class 12C Instead Of Class 12B, Add	*13.41*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-9.14*	
		For 6" Overall Height Instead Of 4-5/8", Add	*4.86*	
26 05 36 00-0780	LF	9" Aluminum Cable Tray, 18" Rung Spacing, Straight Section	96.76	7.45
		For Class 12C Instead Of Class 12B, Add	*13.28*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-9.06*	
		For 6" Overall Height Instead Of 4-5/8", Add	*4.84*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0781	LF	12" Aluminum Cable Tray, 18" Rung Spacing, Straight Section	102.12	7.67
		For Class 12C Instead Of Class 12B, Add	*14.04*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-9.57*	
		For 6" Overall Height Instead Of 4-5/8", Add	*5.11*	
26 05 36 00-0782	LF	18" Aluminum Cable Tray, 18" Rung Spacing, Straight Section	107.63	8.12
		For Class 12C Instead Of Class 12B, Add	*14.80*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-10.09*	
		For 6" Overall Height Instead Of 4-5/8", Add	*5.38*	
26 05 36 00-0783	LF	24" Aluminum Cable Tray, 18" Rung Spacing, Straight Section	115.13	8.23
		For Class 12C Instead Of Class 12B, Add	*15.90*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-10.83*	
		For 6" Overall Height Instead Of 4-5/8", Add	*5.76*	
26 05 36 00-0784	LF	30" Aluminum Cable Tray, 18" Rung Spacing, Straight Section	119.77	9.02
		For Class 12C Instead Of Class 12B, Add	*16.47*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-11.23*	
		For 6" Overall Height Instead Of 4-5/8", Add	*5.99*	
26 05 36 00-0785	LF	36" Aluminum Cable Tray, 18" Rung Spacing, Straight Section	126.06	9.81
		For Class 12C Instead Of Class 12B, Add	*17.27*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-11.79*	
		For 6" Overall Height Instead Of 4-5/8", Add	*6.30*	

26 05 36 00-0786 4" Rung Tray Fittings *(26 05 36 00-0744)*

26 05 36 00-0787 90 Degree, 12" Radius Horizontal Elbows *(26 05 36 00-0786)*

26 05 36 00-0788	EA	6" Horizontal 90 Degree Elbow, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	348.14	113.14
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-25.39*	
		For 6" Overall Height Instead Of 4-5/8", Add	*17.41*	
26 05 36 00-0789	EA	9" Horizontal 90 Degree Elbow, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	378.46	128.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-27.11*	
		For 6" Overall Height Instead Of 4-5/8", Add	*18.92*	
26 05 36 00-0790	EA	12" Horizontal 90 Degree Elbow, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	431.36	142.47
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-31.27*	
		For 6" Overall Height Instead Of 4-5/8", Add	*21.57*	
26 05 36 00-0791	EA	18" Horizontal 90 Degree Elbow, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	509.25	174.62
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-36.37*	
		For 6" Overall Height Instead Of 4-5/8", Add	*25.46*	
26 05 36 00-0792	EA	24" Horizontal 90 Degree Elbow, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	604.89	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-43.78*	
		For 6" Overall Height Instead Of 4-5/8", Add	*30.24*	
26 05 36 00-0793	EA	30" Horizontal 90 Degree Elbow, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	662.94	225.60
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-47.49*	
		For 6" Overall Height Instead Of 4-5/8", Add	*33.15*	
26 05 36 00-0794	EA	36" Horizontal 90 Degree Elbow, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	777.31	257.86
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-56.24*	
		For 6" Overall Height Instead Of 4-5/8", Add	*38.87*	

26 05 36 00-0795 90 Degree, 24" Radius Horizontal Elbows *(26 05 36 00-0786)*

26 05 36 00-0796	EA	6" Horizontal 90 Degree Elbow, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	479.01	117.65
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-38.10*	
		For 6" Overall Height Instead Of 4-5/8", Add	*23.95*	
26 05 36 00-0797	EA	9" Horizontal 90 Degree Elbow, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	520.44	135.25
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-40.77*	
		For 6" Overall Height Instead Of 4-5/8", Add	*26.02*	
26 05 36 00-0798	EA	12" Horizontal 90 Degree Elbow, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	559.83	150.37
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-43.45*	
		For 6" Overall Height Instead Of 4-5/8", Add	*27.99*	
26 05 36 00-0799	EA	18" Horizontal 90 Degree Elbow, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	646.69	186.79
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-49.11*	
		For 6" Overall Height Instead Of 4-5/8", Add	*32.33*	
26 05 36 00-0800	EA	24" Horizontal 90 Degree Elbow, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	728.84	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-54.83*	
		For 6" Overall Height Instead Of 4-5/8", Add	*36.44*	
26 05 36 00-0801	EA	30" Horizontal 90 Degree Elbow, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	812.01	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-60.71*	
		For 6" Overall Height Instead Of 4-5/8", Add	*40.60*	
26 05 36 00-0802	EA	36" Horizontal 90 Degree Elbow, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	927.38	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-69.00*	
		For 6" Overall Height Instead Of 4-5/8", Add	*46.37*	

26 05 36 00-0803 90 Degree, 36" Radius Horizontal Elbows *(26 05 36 00-0786)*

26 05 36 00-0804	EA	6" Horizontal 90 Degree Elbow, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	516.13	122.95
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-41.37*	
		For 6" Overall Height Instead Of 4-5/8", Add	*25.81*	
26 05 36 00-0805	EA	9" Horizontal 90 Degree Elbow, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	556.44	142.36
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-43.79*	
		For 6" Overall Height Instead Of 4-5/8", Add	*27.82*	
26 05 36 00-0806	EA	12" Horizontal 90 Degree Elbow, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	621.18	159.28
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-48.84*	
		For 6" Overall Height Instead Of 4-5/8", Add	*31.06*	
26 05 36 00-0807	EA	18" Horizontal 90 Degree Elbow, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	734.21	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-56.72*	
		For 6" Overall Height Instead Of 4-5/8", Add	*36.71*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0808	EA	24" Horizontal 90 Degree Elbow, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	844.84	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-64.87*	
		For 6" Overall Height Instead Of 4-5/8", Add	*42.24*	
26 05 36 00-0809	EA	30" Horizontal 90 Degree Elbow, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	948.29	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-72.27*	
		For 6" Overall Height Instead Of 4-5/8", Add	*47.41*	
26 05 36 00-0810	EA	36" Horizontal 90 Degree Elbow, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,099.91	318.10
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-83.49*	
		For 6" Overall Height Instead Of 4-5/8", Add	*55.00*	
26 05 36 00-0811		**45 Degree, 12" Radius Horizontal Elbows** *(26 05 36 00-0786)*		
26 05 36 00-0812	EA	6" Horizontal 45 Degree Elbow, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	241.70	82.01
		For 60 Degree Bend, Deduct	*-48.34*	
		For 30 Degree Bend, Deduct	*-85.12*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-17.34*	
		For 6" Overall Height Instead Of 4-5/8", Add	*12.09*	
26 05 36 00-0813	EA	9" Horizontal 45 Degree Elbow, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	272.98	98.36
		For 60 Degree Bend, Deduct	*-52.40*	
		For 30 Degree Bend, Deduct	*-92.79*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-19.11*	
		For 6" Overall Height Instead Of 4-5/8", Add	*13.65*	
26 05 36 00-0814	EA	12" Horizontal 45 Degree Elbow, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	301.16	112.80
		For 60 Degree Bend, Deduct	*-56.14*	
		For 30 Degree Bend, Deduct	*-99.84*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-20.72*	
		For 6" Overall Height Instead Of 4-5/8", Add	*15.06*	
26 05 36 00-0815	EA	18" Horizontal 45 Degree Elbow, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	370.94	142.58
		For 60 Degree Bend, Deduct	*-67.77*	
		For 30 Degree Bend, Deduct	*-120.86*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-25.22*	
		For 6" Overall Height Instead Of 4-5/8", Add	*18.55*	
26 05 36 00-0816	EA	24" Horizontal 45 Degree Elbow, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	456.72	174.62
		For 60 Degree Bend, Deduct	*-83.78*	
		For 30 Degree Bend, Deduct	*-149.34*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-31.12*	
		For 6" Overall Height Instead Of 4-5/8", Add	*22.84*	
26 05 36 00-0817	EA	30" Horizontal 45 Degree Elbow, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	524.06	200.45
		For 60 Degree Bend, Deduct	*-96.09*	
		For 30 Degree Bend, Deduct	*-171.29*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-35.70*	
		For 6" Overall Height Instead Of 4-5/8", Add	*26.20*	
26 05 36 00-0818	EA	36" Horizontal 45 Degree Elbow, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	590.24	235.30
		For 60 Degree Bend, Deduct	*-104.57*	
		For 30 Degree Bend, Deduct	*-187.36*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.41*	
		For 6" Overall Height Instead Of 4-5/8", Add	*29.51*	
26 05 36 00-0819		**45 Degree, 24" Radius Horizontal Elbows** *(26 05 36 00-0786)*		
26 05 36 00-0820	EA	6" Horizontal 45 Degree Elbow, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	282.39	84.60
		For 60 Degree Bend, Deduct	*-60.77*	
		For 30 Degree Bend, Deduct	*-105.99*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-21.19*	
		For 6" Overall Height Instead Of 4-5/8", Add	*14.12*	
26 05 36 00-0821	EA	9" Horizontal 45 Degree Elbow, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	327.59	101.97
		For 60 Degree Bend, Deduct	*-69.01*	
		For 30 Degree Bend, Deduct	*-120.68*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-24.26*	
		For 6" Overall Height Instead Of 4-5/8", Add	*16.38*	
26 05 36 00-0822	EA	12" Horizontal 45 Degree Elbow, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	357.90	117.76
		For 60 Degree Bend, Deduct	*-72.97*	
		For 30 Degree Bend, Deduct	*-128.16*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-25.98*	
		For 6" Overall Height Instead Of 4-5/8", Add	*17.90*	
26 05 36 00-0823	EA	18" Horizontal 45 Degree Elbow, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	424.45	150.37
		For 60 Degree Bend, Deduct	*-82.41*	
		For 30 Degree Bend, Deduct	*-145.71*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-29.91*	
		For 6" Overall Height Instead Of 4-5/8", Add	*21.22*	
26 05 36 00-0824	EA	24" Horizontal 45 Degree Elbow, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	513.33	186.79
		For 60 Degree Bend, Deduct	*-97.81*	
		For 30 Degree Bend, Deduct	*-173.39*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-35.77*	
		For 6" Overall Height Instead Of 4-5/8", Add	*25.67*	
26 05 36 00-0825	EA	30" Horizontal 45 Degree Elbow, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	603.56	216.69
		For 60 Degree Bend, Deduct	*-116.13*	
		For 30 Degree Bend, Deduct	*-205.58*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-42.30*	
		For 6" Overall Height Instead Of 4-5/8", Add	*30.18*	
26 05 36 00-0826	EA	36" Horizontal 45 Degree Elbow, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	684.49	257.97
		For 60 Degree Bend, Deduct	*-127.01*	
		For 30 Degree Bend, Deduct	*-226.01*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-46.96*	
		For 6" Overall Height Instead Of 4-5/8", Add	*34.22*	

copyright 2026 The Gordian Group, Inc.

	MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0827			**45 Degree, 36" Radius Horizontal Elbows** *(26 05 36 00-0786)*		
26 05 36 00-0828		EA	6" Horizontal 45 Degree Elbow, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	335.38	87.31
			For 60 Degree Bend, Deduct	*-77.22*	
			For 30 Degree Bend, Deduct	*-133.56*	
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-26.27*	
			For 6" Overall Height Instead Of 4-5/8", Add	*16.77*	
26 05 36 00-0829		EA	9" Horizontal 45 Degree Elbow, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	370.68	106.03
			For 60 Degree Bend, Deduct	*-81.69*	
			For 30 Degree Bend, Deduct	*-142.03*	
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-28.23*	
			For 6" Overall Height Instead Of 4-5/8", Add	*18.53*	
26 05 36 00-0830		EA	12" Horizontal 45 Degree Elbow, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	403.12	123.06
			For 60 Degree Bend, Deduct	*-85.86*	
			For 30 Degree Bend, Deduct	*-149.93*	
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-30.06*	
			For 6" Overall Height Instead Of 4-5/8", Add	*20.16*	
26 05 36 00-0831		EA	18" Horizontal 45 Degree Elbow, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	483.77	159.28
			For 60 Degree Bend, Deduct	*-98.57*	
			For 30 Degree Bend, Deduct	*-173.13*	
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-35.10*	
			For 6" Overall Height Instead Of 4-5/8", Add	*24.19*	
26 05 36 00-0832		EA	24" Horizontal 45 Degree Elbow, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	600.85	200.45
			For 60 Degree Bend, Deduct	*-121.43*	
			For 30 Degree Bend, Deduct	*-213.53*	
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-43.38*	
			For 6" Overall Height Instead Of 4-5/8", Add	*30.04*	
26 05 36 00-0833		EA	30" Horizontal 45 Degree Elbow, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	675.11	235.30
			For 60 Degree Bend, Deduct	*-132.58*	
			For 30 Degree Bend, Deduct	*-234.04*	
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-47.90*	
			For 6" Overall Height Instead Of 4-5/8", Add	*33.76*	
26 05 36 00-0834		EA	36" Horizontal 45 Degree Elbow, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	785.93	284.82
			For 60 Degree Bend, Deduct	*-150.16*	
			For 30 Degree Bend, Deduct	*-266.10*	
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-54.86*	
			For 6" Overall Height Instead Of 4-5/8", Add	*39.30*	
26 05 36 00-0835			**90 Degree, 12" Radius Vertical Risers** *(26 05 36 00-0786)*		
26 05 36 00-0836		EA	6" Vertical Riser 90 Degree, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	386.46	112.80
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-29.25*	
			For 6" Overall Height Instead Of 4-5/8", Add	*19.32*	
26 05 36 00-0837		EA	9" Vertical Riser 90 Degree, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	424.06	128.82
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-31.67*	
			For 6" Overall Height Instead Of 4-5/8", Add	*21.20*	
26 05 36 00-0838		EA	12" Vertical Riser 90 Degree, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	450.26	142.47
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-33.16*	
			For 6" Overall Height Instead Of 4-5/8", Add	*22.51*	
26 05 36 00-0839		EA	18" Vertical Riser 90 Degree, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	511.13	174.62
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-36.56*	
			For 6" Overall Height Instead Of 4-5/8", Add	*25.56*	
26 05 36 00-0840		EA	24" Vertical Riser 90 Degree, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	565.05	200.45
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.80*	
			For 6" Overall Height Instead Of 4-5/8", Add	*28.25*	
26 05 36 00-0841		EA	30" Vertical Riser 90 Degree, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	617.76	225.60
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-42.98*	
			For 6" Overall Height Instead Of 4-5/8", Add	*30.89*	
26 05 36 00-0842		EA	36" Vertical Riser 90 Degree, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	678.20	257.52
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-46.36*	
			For 6" Overall Height Instead Of 4-5/8", Add	*33.91*	
26 05 36 00-0843			**90 Degree, 24" Radius Vertical Risers** *(26 05 36 00-0786)*		
26 05 36 00-0844		EA	6" Vertical Riser 90 Degree, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	410.81	117.65
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-31.28*	
			For 6" Overall Height Instead Of 4-5/8", Add	*20.54*	
26 05 36 00-0845		EA	9" Vertical Riser 90 Degree, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	449.32	135.36
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-33.65*	
			For 6" Overall Height Instead Of 4-5/8", Add	*22.47*	
26 05 36 00-0846		EA	12" Vertical Riser 90 Degree, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	479.80	150.37
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-35.45*	
			For 6" Overall Height Instead Of 4-5/8", Add	*23.99*	
26 05 36 00-0847		EA	18" Vertical Riser 90 Degree, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	553.02	186.79
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.74*	
			For 6" Overall Height Instead Of 4-5/8", Add	*27.65*	
26 05 36 00-0848		EA	24" Vertical Riser 90 Degree, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	617.27	216.69
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-43.67*	
			For 6" Overall Height Instead Of 4-5/8", Add	*30.86*	
26 05 36 00-0849		EA	30" Vertical Riser 90 Degree, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	680.52	245.90
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-47.56*	
			For 6" Overall Height Instead Of 4-5/8", Add	*34.03*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0850	EA	36" Vertical Riser 90 Degree, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	763.42	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-52.60*	
		For 6" Overall Height Instead Of 4-5/8", Add	*38.17*	
26 05 36 00-0851		**90 Degree, 36" Radius Vertical Risers** *(26 05 36 00-0786)*		
26 05 36 00-0852	EA	6" Vertical Riser 90 Degree, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	536.92	122.95
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-43.44*	
		For 6" Overall Height Instead Of 4-5/8", Add	*26.85*	
26 05 36 00-0853	EA	9" Vertical Riser 90 Degree, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	576.56	142.47
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-45.79*	
		For 6" Overall Height Instead Of 4-5/8", Add	*28.83*	
26 05 36 00-0854	EA	12" Vertical Riser 90 Degree, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	626.38	159.28
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-49.36*	
		For 6" Overall Height Instead Of 4-5/8", Add	*31.32*	
26 05 36 00-0855	EA	18" Vertical Riser 90 Degree, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	709.39	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-54.23*	
		For 6" Overall Height Instead Of 4-5/8", Add	*35.47*	
26 05 36 00-0856	EA	24" Vertical Riser 90 Degree, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	781.91	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-58.58*	
		For 6" Overall Height Instead Of 4-5/8", Add	*39.10*	
26 05 36 00-0857	EA	30" Vertical Riser 90 Degree, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	869.77	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-64.42*	
		For 6" Overall Height Instead Of 4-5/8", Add	*43.49*	
26 05 36 00-0858	EA	36" Vertical Riser 90 Degree, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	966.69	318.10
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-70.17*	
		For 6" Overall Height Instead Of 4-5/8", Add	*48.33*	
26 05 36 00-0859		**12" Radius Horizontal Tees** *(26 05 36 00-0786)*		
26 05 36 00-0860	EA	6" Horizontal Tee, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	589.99	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-40.95*	
		For 6" Overall Height Instead Of 4-5/8", Add	*29.50*	
26 05 36 00-0861	EA	9" Horizontal Tee, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	636.13	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-44.00*	
		For 6" Overall Height Instead Of 4-5/8", Add	*31.81*	
26 05 36 00-0862	EA	12" Horizontal Tee, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	657.57	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-45.26*	
		For 6" Overall Height Instead Of 4-5/8", Add	*32.88*	
26 05 36 00-0863	EA	18" Horizontal Tee, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	747.66	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-52.21*	
		For 6" Overall Height Instead Of 4-5/8", Add	*37.38*	
26 05 36 00-0864	EA	24" Horizontal Tee, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	827.37	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-57.69*	
		For 6" Overall Height Instead Of 4-5/8", Add	*41.37*	
26 05 36 00-0865	EA	30" Horizontal Tee, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	910.09	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-64.46*	
		For 6" Overall Height Instead Of 4-5/8", Add	*45.50*	
26 05 36 00-0866	EA	36" Horizontal Tee, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	1,055.36	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-75.47*	
		For 6" Overall Height Instead Of 4-5/8", Add	*52.77*	
26 05 36 00-0867		**24" Radius Horizontal Tees** *(26 05 36 00-0786)*		
26 05 36 00-0868	EA	6" Horizontal Tee, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	782.49	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-58.64*	
		For 6" Overall Height Instead Of 4-5/8", Add	*39.12*	
26 05 36 00-0869	EA	9" Horizontal Tee, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	842.68	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-62.77*	
		For 6" Overall Height Instead Of 4-5/8", Add	*42.13*	
26 05 36 00-0870	EA	12" Horizontal Tee, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	875.25	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-64.97*	
		For 6" Overall Height Instead Of 4-5/8", Add	*43.76*	
26 05 36 00-0871	EA	18" Horizontal Tee, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	962.47	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-71.20*	
		For 6" Overall Height Instead Of 4-5/8", Add	*48.12*	
26 05 36 00-0872	EA	24" Horizontal Tee, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,066.86	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-78.49*	
		For 6" Overall Height Instead Of 4-5/8", Add	*53.34*	
26 05 36 00-0873	EA	30" Horizontal Tee, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,152.93	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-85.23*	
		For 6" Overall Height Instead Of 4-5/8", Add	*57.65*	
26 05 36 00-0874	EA	36" Horizontal Tee, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,538.94	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-119.17*	
		For 6" Overall Height Instead Of 4-5/8", Add	*76.95*	
26 05 36 00-0875		**36" Radius Horizontal Tees** *(26 05 36 00-0786)*		
26 05 36 00-0876	EA	6" Horizontal Tee, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	981.53	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-76.66*	
		For 6" Overall Height Instead Of 4-5/8", Add	*49.08*	
26 05 36 00-0877	EA	9" Horizontal Tee, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,041.41	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-80.40*	
		For 6" Overall Height Instead Of 4-5/8", Add	*52.07*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0878	EA	12" Horizontal Tee, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,120.08	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-86.96*	
		For 6" Overall Height Instead Of 4-5/8", Add	*56.00*	
26 05 36 00-0879	EA	18" Horizontal Tee, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,216.97	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-93.50*	
		For 6" Overall Height Instead Of 4-5/8", Add	*60.85*	
26 05 36 00-0880	EA	24" Horizontal Tee, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,364.36	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-104.24*	
		For 6" Overall Height Instead Of 4-5/8", Add	*68.22*	
26 05 36 00-0881	EA	30" Horizontal Tee, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,606.48	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-125.92*	
		For 6" Overall Height Instead Of 4-5/8", Add	*80.32*	
26 05 36 00-0882	EA	36" Horizontal Tee, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,833.00	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-142.31*	
		For 6" Overall Height Instead Of 4-5/8", Add	*91.65*	

26 05 36 00-0883 12" Radius Vertical Tees *(26 05 36 00-0786)*

26 05 36 00-0884	EA	6" Vertical Tee, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	848.24	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-68.12*	
		For 6" Overall Height Instead Of 4-5/8", Add	*42.41*	
26 05 36 00-0885	EA	9" Vertical Tee, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	876.43	208.35
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-70.28*	
		For 6" Overall Height Instead Of 4-5/8", Add	*43.82*	
26 05 36 00-0886	EA	12" Vertical Tee, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	893.96	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-71.34*	
		For 6" Overall Height Instead Of 4-5/8", Add	*44.70*	
26 05 36 00-0887	EA	18" Vertical Tee, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	936.35	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-74.02*	
		For 6" Overall Height Instead Of 4-5/8", Add	*46.82*	
26 05 36 00-0888	EA	24" Vertical Tee, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	999.06	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-79.41*	
		For 6" Overall Height Instead Of 4-5/8", Add	*49.95*	
26 05 36 00-0889	EA	30" Vertical Tee, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	1,051.63	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-82.60*	
		For 6" Overall Height Instead Of 4-5/8", Add	*52.58*	
26 05 36 00-0890	EA	36" Vertical Tee, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	1,120.08	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-86.96*	
		For 6" Overall Height Instead Of 4-5/8", Add	*56.00*	

26 05 36 00-0891 24" Radius Vertical Tees *(26 05 36 00-0786)*

26 05 36 00-0892	EA	6" Vertical Tee, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,231.70	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-105.12*	
		For 6" Overall Height Instead Of 4-5/8", Add	*61.59*	
26 05 36 00-0893	EA	9" Vertical Tee, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,257.88	225.60
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-106.99*	
		For 6" Overall Height Instead Of 4-5/8", Add	*62.89*	
26 05 36 00-0894	EA	12" Vertical Tee, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,285.35	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-108.92*	
		For 6" Overall Height Instead Of 4-5/8", Add	*64.27*	
26 05 36 00-0895	EA	18" Vertical Tee, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,349.29	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-113.44*	
		For 6" Overall Height Instead Of 4-5/8", Add	*67.46*	
26 05 36 00-0896	EA	24" Vertical Tee, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,393.13	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-116.75*	
		For 6" Overall Height Instead Of 4-5/8", Add	*69.66*	
26 05 36 00-0897	EA	30" Vertical Tee, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,465.33	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-121.49*	
		For 6" Overall Height Instead Of 4-5/8", Add	*73.27*	
26 05 36 00-0898	EA	36" Vertical Tee, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,614.75	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-133.28*	
		For 6" Overall Height Instead Of 4-5/8", Add	*80.74*	

26 05 36 00-0899 36" Radius Vertical Tee *(26 05 36 00-0786)*

26 05 36 00-0900	EA	6" Vertical Tee, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	2,048.46	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-185.24*	
		For 6" Overall Height Instead Of 4-5/8", Add	*102.42*	
26 05 36 00-0901	EA	9" Vertical Tee, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	2,087.64	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-188.27*	
		For 6" Overall Height Instead Of 4-5/8", Add	*104.38*	
26 05 36 00-0902	EA	12" Vertical Tee, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	2,129.14	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-191.42*	
		For 6" Overall Height Instead Of 4-5/8", Add	*106.46*	
26 05 36 00-0903	EA	18" Vertical Tee, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	2,195.55	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-195.82*	
		For 6" Overall Height Instead Of 4-5/8", Add	*109.78*	
26 05 36 00-0904	EA	24" Vertical Tee, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	2,243.19	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-199.27*	
		For 6" Overall Height Instead Of 4-5/8", Add	*112.16*	
26 05 36 00-0905	EA	30" Vertical Tee, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	2,370.81	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-208.88*	
		For 6" Overall Height Instead Of 4-5/8", Add	*118.54*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0906	EA	36" Vertical Tee, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	2,472.15	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-215.02*	
		For 6" Overall Height Instead Of 4-5/8", Add	*123.61*	
26 05 36 00-0907		**12" Radius Horizontal Crosses** *(26 05 36 00-0786)*		
26 05 36 00-0908	EA	6" Horizontal Cross, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	770.18	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-54.46*	
		For 6" Overall Height Instead Of 4-5/8", Add	*38.51*	
26 05 36 00-0909	EA	9" Horizontal Cross, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	827.50	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-59.01*	
		For 6" Overall Height Instead Of 4-5/8", Add	*41.38*	
26 05 36 00-0910	EA	12" Horizontal Cross, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	857.40	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-60.70*	
		For 6" Overall Height Instead Of 4-5/8", Add	*42.87*	
26 05 36 00-0911	EA	18" Horizontal Cross, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	962.63	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-69.71*	
		For 6" Overall Height Instead Of 4-5/8", Add	*48.13*	
26 05 36 00-0912	EA	24" Horizontal Cross, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	1,047.85	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-74.72*	
		For 6" Overall Height Instead Of 4-5/8", Add	*52.39*	
26 05 36 00-0913	EA	30" Horizontal Cross, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	1,169.22	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-84.73*	
		For 6" Overall Height Instead Of 4-5/8", Add	*58.46*	
26 05 36 00-0914	EA	36" Horizontal Cross, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	1,351.30	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-100.40*	
		For 6" Overall Height Instead Of 4-5/8", Add	*67.57*	
26 05 36 00-0915		**24" Radius Horizontal Crosses** *(26 05 36 00-0786)*		
26 05 36 00-0916	EA	6" Horizontal Cross, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,112.58	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-86.21*	
		For 6" Overall Height Instead Of 4-5/8", Add	*55.63*	
26 05 36 00-0917	EA	9" Horizontal Cross, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,161.52	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-89.60*	
		For 6" Overall Height Instead Of 4-5/8", Add	*58.08*	
26 05 36 00-0918	EA	12" Horizontal Cross, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,213.22	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-93.12*	
		For 6" Overall Height Instead Of 4-5/8", Add	*60.66*	
26 05 36 00-0919	EA	18" Horizontal Cross, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,284.27	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-98.36*	
		For 6" Overall Height Instead Of 4-5/8", Add	*64.21*	
26 05 36 00-0920	EA	24" Horizontal Cross, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,437.61	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-109.03*	
		For 6" Overall Height Instead Of 4-5/8", Add	*71.88*	
26 05 36 00-0921	EA	30" Horizontal Cross, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,583.76	451.20
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-120.78*	
		For 6" Overall Height Instead Of 4-5/8", Add	*79.19*	
26 05 36 00-0922	EA	36" Horizontal Cross, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,757.47	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-134.76*	
		For 6" Overall Height Instead Of 4-5/8", Add	*87.87*	
26 05 36 00-0923		**36" Radius Horizontal Crosses** *(26 05 36 00-0786)*		
26 05 36 00-0924	EA	6" Horizontal Cross, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,284.52	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-100.25*	
		For 6" Overall Height Instead Of 4-5/8", Add	*64.23*	
26 05 36 00-0925	EA	9" Horizontal Cross, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,385.96	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-108.53*	
		For 6" Overall Height Instead Of 4-5/8", Add	*69.30*	
26 05 36 00-0926	EA	12" Horizontal Cross, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,475.60	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-115.37*	
		For 6" Overall Height Instead Of 4-5/8", Add	*73.78*	
26 05 36 00-0927	EA	18" Horizontal Cross, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,542.69	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-119.54*	
		For 6" Overall Height Instead Of 4-5/8", Add	*77.13*	
26 05 36 00-0928	EA	24" Horizontal Cross, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,870.52	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-146.06*	
		For 6" Overall Height Instead Of 4-5/8", Add	*93.53*	
26 05 36 00-0929	EA	30" Horizontal Cross, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	2,064.29	540.54
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-161.38*	
		For 6" Overall Height Instead Of 4-5/8", Add	*103.21*	
26 05 36 00-0930	EA	36" Horizontal Cross, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	2,298.25	602.13
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-179.65*	
		For 6" Overall Height Instead Of 4-5/8", Add	*114.91*	
26 05 36 00-0931		**12" Radius Vertical Cross** *(26 05 36 00-0786)*		
26 05 36 00-0932	EA	6" Vertical Cross, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	770.18	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-54.46*	
		For 6" Overall Height Instead Of 4-5/8", Add	*38.51*	
26 05 36 00-0933	EA	9" Vertical Cross, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	827.66	284.94
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-59.02*	
		For 6" Overall Height Instead Of 4-5/8", Add	*41.38*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0934	EA	12" Vertical Cross, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	857.31	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-60.69*	
		For 6" Overall Height Instead Of 4-5/8", Add	*42.87*	
26 05 36 00-0935	EA	18" Vertical Cross, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	962.83	318.78
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-69.72*	
		For 6" Overall Height Instead Of 4-5/8", Add	*48.14*	
26 05 36 00-0936	EA	24" Vertical Cross, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	1,047.85	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-74.72*	
		For 6" Overall Height Instead Of 4-5/8", Add	*52.39*	
26 05 36 00-0937	EA	30" Vertical Cross, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	1,169.51	386.46
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-84.74*	
		For 6" Overall Height Instead Of 4-5/8", Add	*58.48*	
26 05 36 00-0938	EA	36" Vertical Cross, 4" Rung Spacing, 12" Radius, Aluminum Cable Tray	1,350.45	416.23
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-100.36*	
		For 6" Overall Height Instead Of 4-5/8", Add	*67.52*	
26 05 36 00-0939		**24" Radius Vertical Crosses** *(26 05 36 00-0786)*		
26 05 36 00-0940	EA	6" Vertical Cross, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,112.58	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-86.21*	
		For 6" Overall Height Instead Of 4-5/8", Add	*55.63*	
26 05 36 00-0941	EA	9" Vertical Cross, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,161.52	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-89.60*	
		For 6" Overall Height Instead Of 4-5/8", Add	*58.08*	
26 05 36 00-0942	EA	12" Vertical Cross, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,213.22	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-93.12*	
		For 6" Overall Height Instead Of 4-5/8", Add	*60.66*	
26 05 36 00-0943	EA	18" Vertical Cross, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,284.27	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-98.36*	
		For 6" Overall Height Instead Of 4-5/8", Add	*64.21*	
26 05 36 00-0944	EA	24" Vertical Cross, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,437.61	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-109.03*	
		For 6" Overall Height Instead Of 4-5/8", Add	*71.88*	
26 05 36 00-0945	EA	30" Vertical Cross, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,547.57	451.20
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-117.16*	
		For 6" Overall Height Instead Of 4-5/8", Add	*77.38*	
26 05 36 00-0946	EA	36" Vertical Cross, 4" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,716.66	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-130.68*	
		For 6" Overall Height Instead Of 4-5/8", Add	*85.83*	
26 05 36 00-0947		**36" Radius Vertical Crosses** *(26 05 36 00-0786)*		
26 05 36 00-0948	EA	6" Vertical Cross, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,608.75	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-132.68*	
		For 6" Overall Height Instead Of 4-5/8", Add	*80.44*	
26 05 36 00-0949	EA	9" Vertical Cross, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,689.56	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-138.89*	
		For 6" Overall Height Instead Of 4-5/8", Add	*84.48*	
26 05 36 00-0950	EA	12" Vertical Cross, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,797.42	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-147.55*	
		For 6" Overall Height Instead Of 4-5/8", Add	*89.87*	
26 05 36 00-0951	EA	18" Vertical Cross, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,924.34	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-157.71*	
		For 6" Overall Height Instead Of 4-5/8", Add	*96.22*	
26 05 36 00-0952	EA	24" Vertical Cross, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	2,343.36	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-193.35*	
		For 6" Overall Height Instead Of 4-5/8", Add	*117.17*	
26 05 36 00-0953	EA	30" Vertical Cross, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	2,587.79	540.54
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-213.73*	
		For 6" Overall Height Instead Of 4-5/8", Add	*129.39*	
26 05 36 00-0954	EA	36" Vertical Cross, 4" Rung Spacing, 36" Radius, Aluminum Cable Tray	2,880.85	602.13
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-237.91*	
		For 6" Overall Height Instead Of 4-5/8", Add	*144.04*	
26 05 36 00-0955		**6" Rung Tray Fittings** *(26 05 36 00-0744)*		
26 05 36 00-0956		**90 Degree, 12" Radius Horizontal Elbows** *(26 05 36 00-0955)*		
26 05 36 00-0957	EA	6" Horizontal 90 Degree Elbow, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	325.34	113.14
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-23.11*	
		For 6" Overall Height Instead Of 4-5/8", Add	*16.27*	
26 05 36 00-0958	EA	9" Horizontal 90 Degree Elbow, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	355.07	128.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-24.77*	
		For 6" Overall Height Instead Of 4-5/8", Add	*17.75*	
26 05 36 00-0959	EA	12" Horizontal 90 Degree Elbow, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	403.64	142.47
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-28.50*	
		For 6" Overall Height Instead Of 4-5/8", Add	*20.18*	
26 05 36 00-0960	EA	18" Horizontal 90 Degree Elbow, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	478.08	174.62
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-33.26*	
		For 6" Overall Height Instead Of 4-5/8", Add	*23.90*	
26 05 36 00-0961	EA	24" Horizontal 90 Degree Elbow, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	566.21	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.92*	
		For 6" Overall Height Instead Of 4-5/8", Add	*28.31*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0962	EA	30" Horizontal 90 Degree Elbow, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	621.95	225.60
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-43.40*	
		For 6" Overall Height Instead Of 4-5/8", Add	*31.10*	
26 05 36 00-0963	EA	36" Horizontal 90 Degree Elbow, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	727.66	257.86
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-51.28*	
		For 6" Overall Height Instead Of 4-5/8", Add	*36.38*	
26 05 36 00-0964		**90 Degree, 24" Radius Horizontal Elbows** *(26 05 36 00-0955)*		
26 05 36 00-0965	EA	6" Horizontal 90 Degree Elbow, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	438.59	117.65
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-34.05*	
		For 6" Overall Height Instead Of 4-5/8", Add	*21.93*	
26 05 36 00-0966	EA	9" Horizontal 90 Degree Elbow, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	478.29	135.25
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-36.56*	
		For 6" Overall Height Instead Of 4-5/8", Add	*23.91*	
26 05 36 00-0967	EA	12" Horizontal 90 Degree Elbow, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	515.67	150.37
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.03*	
		For 6" Overall Height Instead Of 4-5/8", Add	*25.78*	
26 05 36 00-0968	EA	18" Horizontal 90 Degree Elbow, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	598.77	186.79
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-44.31*	
		For 6" Overall Height Instead Of 4-5/8", Add	*29.94*	
26 05 36 00-0969	EA	24" Horizontal 90 Degree Elbow, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	676.31	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-49.58*	
		For 6" Overall Height Instead Of 4-5/8", Add	*33.82*	
26 05 36 00-0970	EA	30" Horizontal 90 Degree Elbow, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	754.56	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-54.96*	
		For 6" Overall Height Instead Of 4-5/8", Add	*37.73*	
26 05 36 00-0971	EA	36" Horizontal 90 Degree Elbow, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	862.72	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-62.53*	
		For 6" Overall Height Instead Of 4-5/8", Add	*43.14*	
26 05 36 00-0972		**90 Degree, 36" Radius Horizontal Elbows** *(26 05 36 00-0955)*		
26 05 36 00-0973	EA	6" Horizontal 90 Degree Elbow, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	471.68	122.95
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-36.92*	
		For 6" Overall Height Instead Of 4-5/8", Add	*23.58*	
26 05 36 00-0974	EA	9" Horizontal 90 Degree Elbow, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	510.83	142.36
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.22*	
		For 6" Overall Height Instead Of 4-5/8", Add	*25.54*	
26 05 36 00-0975	EA	12" Horizontal 90 Degree Elbow, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	570.37	159.28
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-43.76*	
		For 6" Overall Height Instead Of 4-5/8", Add	*28.52*	
26 05 36 00-0976	EA	18" Horizontal 90 Degree Elbow, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	677.06	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-51.00*	
		For 6" Overall Height Instead Of 4-5/8", Add	*33.85*	
26 05 36 00-0977	EA	24" Horizontal 90 Degree Elbow, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	780.18	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-58.41*	
		For 6" Overall Height Instead Of 4-5/8", Add	*39.01*	
26 05 36 00-0978	EA	30" Horizontal 90 Degree Elbow, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	877.27	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-65.17*	
		For 6" Overall Height Instead Of 4-5/8", Add	*43.86*	
26 05 36 00-0979	EA	36" Horizontal 90 Degree Elbow, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,018.51	318.10
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-75.35*	
		For 6" Overall Height Instead Of 4-5/8", Add	*50.93*	
26 05 36 00-0980		**45 Degree, 12" Radius Horizontal Elbows** *(26 05 36 00-0955)*		
26 05 36 00-0981	EA	6" Horizontal 45 Degree Elbow, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	226.68	82.01
		For 60 Degree Bend, Deduct	*-43.38*	
		For 30 Degree Bend, Deduct	*-76.86*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-15.84*	
		For 6" Overall Height Instead Of 4-5/8", Add	*11.33*	
26 05 36 00-0982	EA	9" Horizontal 45 Degree Elbow, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	257.39	98.36
		For 60 Degree Bend, Deduct	*-47.25*	
		For 30 Degree Bend, Deduct	*-84.21*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-17.55*	
		For 6" Overall Height Instead Of 4-5/8", Add	*12.87*	
26 05 36 00-0983	EA	12" Horizontal 45 Degree Elbow, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	284.99	112.80
		For 60 Degree Bend, Deduct	*-50.81*	
		For 30 Degree Bend, Deduct	*-90.94*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-19.10*	
		For 6" Overall Height Instead Of 4-5/8", Add	*14.25*	
26 05 36 00-0984	EA	18" Horizontal 45 Degree Elbow, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	351.89	142.58
		For 60 Degree Bend, Deduct	*-61.48*	
		For 30 Degree Bend, Deduct	*-110.39*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-23.31*	
		For 6" Overall Height Instead Of 4-5/8", Add	*17.59*	
26 05 36 00-0985	EA	24" Horizontal 45 Degree Elbow, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	433.04	174.62
		For 60 Degree Bend, Deduct	*-75.97*	
		For 30 Degree Bend, Deduct	*-136.32*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-28.75*	
		For 6" Overall Height Instead Of 4-5/8", Add	*21.65*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-0986	EA	30" Horizontal 45 Degree Elbow, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	496.93	200.45
		For 60 Degree Bend, Deduct	*-87.14*	
		For 30 Degree Bend, Deduct	*-156.37*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-32.99*	
		For 6" Overall Height Instead Of 4-5/8", Add	*24.85*	
26 05 36 00-0987	EA	36" Horizontal 45 Degree Elbow, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	561.95	235.30
		For 60 Degree Bend, Deduct	*-95.24*	
		For 30 Degree Bend, Deduct	*-171.80*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-36.58*	
		For 6" Overall Height Instead Of 4-5/8", Add	*28.10*	

26 05 36 00-0988 45 Degree, 24" Radius Horizontal Elbows *(26 05 36 00-0955)*

26 05 36 00-0989	EA	6" Horizontal 45 Degree Elbow, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	262.18	84.60
		For 60 Degree Bend, Deduct	*-54.10*	
		For 30 Degree Bend, Deduct	*-94.87*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-19.17*	
		For 6" Overall Height Instead Of 4-5/8", Add	*13.11*	
26 05 36 00-0990	EA	9" Horizontal 45 Degree Elbow, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	305.08	101.97
		For 60 Degree Bend, Deduct	*-61.58*	
		For 30 Degree Bend, Deduct	*-108.30*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-22.01*	
		For 6" Overall Height Instead Of 4-5/8", Add	*15.25*	
26 05 36 00-0991	EA	12" Horizontal 45 Degree Elbow, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	334.81	117.76
		For 60 Degree Bend, Deduct	*-65.35*	
		For 30 Degree Bend, Deduct	*-115.46*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-23.67*	
		For 6" Overall Height Instead Of 4-5/8", Add	*16.74*	
26 05 36 00-0992	EA	18" Horizontal 45 Degree Elbow, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	399.62	150.37
		For 60 Degree Bend, Deduct	*-74.22*	
		For 30 Degree Bend, Deduct	*-132.06*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-27.43*	
		For 6" Overall Height Instead Of 4-5/8", Add	*19.98*	
26 05 36 00-0993	EA	24" Horizontal 45 Degree Elbow, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	484.46	186.79
		For 60 Degree Bend, Deduct	*-88.28*	
		For 30 Degree Bend, Deduct	*-157.51*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-32.88*	
		For 6" Overall Height Instead Of 4-5/8", Add	*24.22*	
26 05 36 00-0994	EA	30" Horizontal 45 Degree Elbow, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	568.92	216.69
		For 60 Degree Bend, Deduct	*-104.70*	
		For 30 Degree Bend, Deduct	*-186.53*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-38.84*	
		For 6" Overall Height Instead Of 4-5/8", Add	*28.45*	
26 05 36 00-0995	EA	36" Horizontal 45 Degree Elbow, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	648.11	257.97
		For 60 Degree Bend, Deduct	*-115.00*	
		For 30 Degree Bend, Deduct	*-206.00*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-43.32*	
		For 6" Overall Height Instead Of 4-5/8", Add	*32.41*	

26 05 36 00-0996 45 Degree, 36" Radius Horizontal Elbows *(26 05 36 00-0955)*

26 05 36 00-0997	EA	6" Horizontal 45 Degree Elbow, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	308.25	87.31
		For 60 Degree Bend, Deduct	*-68.27*	
		For 30 Degree Bend, Deduct	*-118.63*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-23.55*	
		For 6" Overall Height Instead Of 4-5/8", Add	*15.41*	
26 05 36 00-0998	EA	9" Horizontal 45 Degree Elbow, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	342.96	106.03
		For 60 Degree Bend, Deduct	*-72.54*	
		For 30 Degree Bend, Deduct	*-126.79*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-25.46*	
		For 6" Overall Height Instead Of 4-5/8", Add	*17.15*	
26 05 36 00-0999	EA	12" Horizontal 45 Degree Elbow, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	374.83	123.06
		For 60 Degree Bend, Deduct	*-76.52*	
		For 30 Degree Bend, Deduct	*-134.38*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-27.23*	
		For 6" Overall Height Instead Of 4-5/8", Add	*18.74*	
26 05 36 00-1000	EA	18" Horizontal 45 Degree Elbow, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	452.60	159.28
		For 60 Degree Bend, Deduct	*-88.28*	
		For 30 Degree Bend, Deduct	*-155.99*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-31.98*	
		For 6" Overall Height Instead Of 4-5/8", Add	*22.63*	
26 05 36 00-1001	EA	24" Horizontal 45 Degree Elbow, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	562.75	200.45
		For 60 Degree Bend, Deduct	*-108.86*	
		For 30 Degree Bend, Deduct	*-192.57*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.57*	
		For 6" Overall Height Instead Of 4-5/8", Add	*28.14*	
26 05 36 00-1002	EA	30" Horizontal 45 Degree Elbow, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	634.69	235.30
		For 60 Degree Bend, Deduct	*-119.24*	
		For 30 Degree Bend, Deduct	*-211.81*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-43.86*	
		For 6" Overall Height Instead Of 4-5/8", Add	*31.73*	
26 05 36 00-1003	EA	36" Horizontal 45 Degree Elbow, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	741.48	284.82
		For 60 Degree Bend, Deduct	*-135.50*	
		For 30 Degree Bend, Deduct	*-241.65*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-50.41*	
		For 6" Overall Height Instead Of 4-5/8", Add	*37.07*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1004		**90 Degree, 12" Radius Vertical Risers** *(26 05 36 00-0955)*		
26 05 36 00-1005	EA	6" Vertical Riser 90 Degree, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	370.58	112.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-27.66*	
		For 6" Overall Height Instead Of 4-5/8", Add	*18.53*	
26 05 36 00-1006	EA	9" Vertical Riser 90 Degree, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	407.32	128.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-29.99*	
		For 6" Overall Height Instead Of 4-5/8", Add	*20.37*	
26 05 36 00-1007	EA	12" Vertical Riser 90 Degree, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	433.23	142.47
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-31.45*	
		For 6" Overall Height Instead Of 4-5/8", Add	*21.66*	
26 05 36 00-1008	EA	18" Vertical Riser 90 Degree, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	493.52	174.62
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-34.80*	
		For 6" Overall Height Instead Of 4-5/8", Add	*24.68*	
26 05 36 00-1009	EA	24" Vertical Riser 90 Degree, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	546.58	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-37.95*	
		For 6" Overall Height Instead Of 4-5/8", Add	*27.33*	
26 05 36 00-1010	EA	30" Vertical Riser 90 Degree, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	598.42	225.60
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-41.04*	
		For 6" Overall Height Instead Of 4-5/8", Add	*29.92*	
26 05 36 00-1011	EA	36" Vertical Riser 90 Degree, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	658.28	257.52
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-44.37*	
		For 6" Overall Height Instead Of 4-5/8", Add	*32.91*	
26 05 36 00-1012		**90 Degree, 24" Radius Vertical Risers** *(26 05 36 00-0955)*		
26 05 36 00-1013	EA	6" Vertical Riser 90 Degree, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	393.63	117.65
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-29.56*	
		For 6" Overall Height Instead Of 4-5/8", Add	*19.68*	
26 05 36 00-1014	EA	9" Vertical Riser 90 Degree, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	431.42	135.36
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-31.86*	
		For 6" Overall Height Instead Of 4-5/8", Add	*21.57*	
26 05 36 00-1015	EA	12" Vertical Riser 90 Degree, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	461.47	150.37
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-33.61*	
		For 6" Overall Height Instead Of 4-5/8", Add	*23.07*	
26 05 36 00-1016	EA	18" Vertical Riser 90 Degree, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	533.68	186.79
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-37.81*	
		For 6" Overall Height Instead Of 4-5/8", Add	*26.68*	
26 05 36 00-1017	EA	24" Vertical Riser 90 Degree, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	596.78	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-41.62*	
		For 6" Overall Height Instead Of 4-5/8", Add	*29.84*	
26 05 36 00-1018	EA	30" Vertical Riser 90 Degree, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	658.87	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-45.39*	
		For 6" Overall Height Instead Of 4-5/8", Add	*32.94*	
26 05 36 00-1019	EA	36" Vertical Riser 90 Degree, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	740.33	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-50.30*	
		For 6" Overall Height Instead Of 4-5/8", Add	*37.02*	
26 05 36 00-1020		**90 Degree, 36" Radius Vertical Risers** *(26 05 36 00-0955)*		
26 05 36 00-1021	EA	6" Vertical Riser 90 Degree, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	510.36	122.95
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-40.79*	
		For 6" Overall Height Instead Of 4-5/8", Add	*25.52*	
26 05 36 00-1022	EA	9" Vertical Riser 90 Degree, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	549.42	142.47
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-43.07*	
		For 6" Overall Height Instead Of 4-5/8", Add	*27.47*	
26 05 36 00-1023	EA	12" Vertical Riser 90 Degree, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	597.51	159.28
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-46.47*	
		For 6" Overall Height Instead Of 4-5/8", Add	*29.88*	
26 05 36 00-1024	EA	18" Vertical Riser 90 Degree, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	679.37	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-51.23*	
		For 6" Overall Height Instead Of 4-5/8", Add	*33.97*	
26 05 36 00-1025	EA	24" Vertical Riser 90 Degree, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	750.74	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-55.46*	
		For 6" Overall Height Instead Of 4-5/8", Add	*37.54*	
26 05 36 00-1026	EA	30" Vertical Riser 90 Degree, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	836.28	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-61.07*	
		For 6" Overall Height Instead Of 4-5/8", Add	*41.81*	
26 05 36 00-1027	EA	36" Vertical Riser 90 Degree, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	931.76	318.10
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-66.67*	
		For 6" Overall Height Instead Of 4-5/8", Add	*46.59*	
26 05 36 00-1028		**12" Radius Horizontal Tees** *(26 05 36 00-0955)*		
26 05 36 00-1029	EA	6" Horizontal Tee, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	572.39	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.19*	
		For 6" Overall Height Instead Of 4-5/8", Add	*28.62*	
26 05 36 00-1030	EA	9" Horizontal Tee, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	617.37	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-42.13*	
		For 6" Overall Height Instead Of 4-5/8", Add	*30.87*	
26 05 36 00-1031	EA	12" Horizontal Tee, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	638.52	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-43.36*	
		For 6" Overall Height Instead Of 4-5/8", Add	*31.93*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1032	EA	18" Horizontal Tee, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	724.86	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-49.93*	
		For 6" Overall Height Instead Of 4-5/8", Add	*36.24*	
26 05 36 00-1033	EA	24" Horizontal Tee, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	802.26	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-55.18*	
		For 6" Overall Height Instead Of 4-5/8", Add	*40.11*	
26 05 36 00-1034	EA	30" Horizontal Tee, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	880.94	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-61.54*	
		For 6" Overall Height Instead Of 4-5/8", Add	*44.05*	
26 05 36 00-1035	EA	36" Horizontal Tee, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	1,020.43	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-71.98*	
		For 6" Overall Height Instead Of 4-5/8", Add	*51.02*	

26 05 36 00-1036 24" Radius Horizontal Tees *(26 05 36 00-0955)*

26 05 36 00-1037	EA	6" Horizontal Tee, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	752.47	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-55.64*	
		For 6" Overall Height Instead Of 4-5/8", Add	*37.62*	
26 05 36 00-1038	EA	9" Horizontal Tee, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	810.92	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-59.60*	
		For 6" Overall Height Instead Of 4-5/8", Add	*40.55*	
26 05 36 00-1039	EA	12" Horizontal Tee, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	842.63	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-61.70*	
		For 6" Overall Height Instead Of 4-5/8", Add	*42.13*	
26 05 36 00-1040	EA	18" Horizontal Tee, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	926.96	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-67.65*	
		For 6" Overall Height Instead Of 4-5/8", Add	*46.35*	
26 05 36 00-1041	EA	24" Horizontal Tee, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,028.18	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-74.62*	
		For 6" Overall Height Instead Of 4-5/8", Add	*51.41*	
26 05 36 00-1042	EA	30" Horizontal Tee, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,110.49	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-80.99*	
		For 6" Overall Height Instead Of 4-5/8", Add	*55.52*	
26 05 36 00-1043	EA	36" Horizontal Tee, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,473.98	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-112.67*	
		For 6" Overall Height Instead Of 4-5/8", Add	*73.70*	

26 05 36 00-1044 36" Radius Horizontal Tees *(26 05 36 00-0955)*

26 05 36 00-1045	EA	6" Horizontal Tee, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	939.09	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-72.42*	
		For 6" Overall Height Instead Of 4-5/8", Add	*46.95*	
26 05 36 00-1046	EA	9" Horizontal Tee, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	997.82	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-76.04*	
		For 6" Overall Height Instead Of 4-5/8", Add	*49.89*	
26 05 36 00-1047	EA	12" Horizontal Tee, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,072.45	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-82.20*	
		For 6" Overall Height Instead Of 4-5/8", Add	*53.62*	
26 05 36 00-1048	EA	18" Horizontal Tee, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,166.74	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-88.47*	
		For 6" Overall Height Instead Of 4-5/8", Add	*58.34*	
26 05 36 00-1049	EA	24" Horizontal Tee, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,308.93	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-98.70*	
		For 6" Overall Height Instead Of 4-5/8", Add	*65.45*	
26 05 36 00-1050	EA	30" Horizontal Tee, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,536.34	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-118.91*	
		For 6" Overall Height Instead Of 4-5/8", Add	*76.82*	
26 05 36 00-1051	EA	36" Horizontal Tee, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,755.06	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-134.52*	
		For 6" Overall Height Instead Of 4-5/8", Add	*87.75*	

26 05 36 00-1052 12" Radius Vertical Tees *(26 05 36 00-0955)*

26 05 36 00-1053	EA	6" Vertical Tee, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	808.69	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-64.16*	
		For 6" Overall Height Instead Of 4-5/8", Add	*40.43*	
26 05 36 00-1054	EA	9" Vertical Tee, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	835.73	208.35
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-66.21*	
		For 6" Overall Height Instead Of 4-5/8", Add	*41.79*	
26 05 36 00-1055	EA	12" Vertical Tee, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	852.97	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-67.24*	
		For 6" Overall Height Instead Of 4-5/8", Add	*42.65*	
26 05 36 00-1056	EA	18" Vertical Tee, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	894.49	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-69.84*	
		For 6" Overall Height Instead Of 4-5/8", Add	*44.72*	
26 05 36 00-1057	EA	24" Vertical Tee, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	953.74	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-74.88*	
		For 6" Overall Height Instead Of 4-5/8", Add	*47.69*	
26 05 36 00-1058	EA	30" Vertical Tee, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	1,005.44	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-77.98*	
		For 6" Overall Height Instead Of 4-5/8", Add	*50.27*	
26 05 36 00-1059	EA	36" Vertical Tee, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	1,072.45	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-82.20*	
		For 6" Overall Height Instead Of 4-5/8", Add	*53.62*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1060		**24" Radius Vertical Tees** *(26 05 36 00-0955)*		
26 05 36 00-1061	EA	6" Vertical Tee, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,164.73	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-98.42*	
		For 6" Overall Height Instead Of 4-5/8", Add	*58.24*	
26 05 36 00-1062	EA	9" Vertical Tee, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,190.05	225.60
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-100.21*	
		For 6" Overall Height Instead Of 4-5/8", Add	*59.50*	
26 05 36 00-1063	EA	12" Vertical Tee, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,216.65	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-102.05*	
		For 6" Overall Height Instead Of 4-5/8", Add	*60.83*	
26 05 36 00-1064	EA	18" Vertical Tee, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,278.57	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-106.36*	
		For 6" Overall Height Instead Of 4-5/8", Add	*63.93*	
26 05 36 00-1065	EA	24" Vertical Tee, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,320.67	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-109.51*	
		For 6" Overall Height Instead Of 4-5/8", Add	*66.03*	
26 05 36 00-1066	EA	30" Vertical Tee, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,391.14	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-114.07*	
		For 6" Overall Height Instead Of 4-5/8", Add	*69.56*	
26 05 36 00-1067	EA	36" Vertical Tee, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,533.93	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-125.19*	
		For 6" Overall Height Instead Of 4-5/8", Add	*76.70*	
26 05 36 00-1068		**36" Radius Vertical Tees** *(26 05 36 00-0955)*		
26 05 36 00-1069	EA	6" Vertical Tee, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,921.06	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-172.50*	
		For 6" Overall Height Instead Of 4-5/8", Add	*96.05*	
26 05 36 00-1070	EA	9" Vertical Tee, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,958.59	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-175.36*	
		For 6" Overall Height Instead Of 4-5/8", Add	*97.93*	
26 05 36 00-1071	EA	12" Vertical Tee, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,998.42	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-178.35*	
		For 6" Overall Height Instead Of 4-5/8", Add	*99.92*	
26 05 36 00-1072	EA	18" Vertical Tee, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	2,063.18	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-182.58*	
		For 6" Overall Height Instead Of 4-5/8", Add	*103.16*	
26 05 36 00-1073	EA	24" Vertical Tee, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	2,109.17	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-185.87*	
		For 6" Overall Height Instead Of 4-5/8", Add	*105.46*	
26 05 36 00-1074	EA	30" Vertical Tee, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	2,231.82	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-194.98*	
		For 6" Overall Height Instead Of 4-5/8", Add	*111.59*	
26 05 36 00-1075	EA	36" Vertical Tee, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	2,331.51	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-200.96*	
		For 6" Overall Height Instead Of 4-5/8", Add	*116.58*	
26 05 36 00-1076		**12" Radius Horizontal Crosses** *(26 05 36 00-0955)*		
26 05 36 00-1077	EA	6" Horizontal Cross, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	745.64	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-52.00*	
		For 6" Overall Height Instead Of 4-5/8", Add	*37.28*	
26 05 36 00-1078	EA	9" Horizontal Cross, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	800.37	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-56.30*	
		For 6" Overall Height Instead Of 4-5/8", Add	*40.02*	
26 05 36 00-1079	EA	12" Horizontal Cross, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	829.97	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-57.95*	
		For 6" Overall Height Instead Of 4-5/8", Add	*41.50*	
26 05 36 00-1080	EA	18" Horizontal Cross, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	929.43	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-66.39*	
		For 6" Overall Height Instead Of 4-5/8", Add	*46.47*	
26 05 36 00-1081	EA	24" Horizontal Cross, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	1,013.50	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-71.29*	
		For 6" Overall Height Instead Of 4-5/8", Add	*50.68*	
26 05 36 00-1082	EA	30" Horizontal Cross, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	1,128.80	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-80.69*	
		For 6" Overall Height Instead Of 4-5/8", Add	*56.44*	
26 05 36 00-1083	EA	36" Horizontal Cross, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	1,300.78	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-95.35*	
		For 6" Overall Height Instead Of 4-5/8", Add	*65.04*	
26 05 36 00-1084		**24" Radius Horizontal Crosses** *(26 05 36 00-0955)*		
26 05 36 00-1085	EA	6" Horizontal Cross, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,065.53	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-81.51*	
		For 6" Overall Height Instead Of 4-5/8", Add	*53.28*	
26 05 36 00-1086	EA	9" Horizontal Cross, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,113.03	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-84.75*	
		For 6" Overall Height Instead Of 4-5/8", Add	*55.65*	
26 05 36 00-1087	EA	12" Horizontal Cross, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,163.28	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-88.13*	
		For 6" Overall Height Instead Of 4-5/8", Add	*58.16*	

copyright 2026 The Gordian Group, Inc.

	MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1088		EA	18" Horizontal Cross, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,231.73	360.74
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-93.11*	
			For 6" Overall Height Instead Of 4-5/8", Add	*61.59*	
26 05 36 00-1089		EA	24" Horizontal Cross, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,380.46	416.80
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-103.32*	
			For 6" Overall Height Instead Of 4-5/8", Add	*69.02*	
26 05 36 00-1090		EA	30" Horizontal Cross, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,486.37	451.20
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-111.04*	
			For 6" Overall Height Instead Of 4-5/8", Add	*74.32*	
26 05 36 00-1091		EA	36" Horizontal Cross, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,647.67	491.81
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-123.78*	
			For 6" Overall Height Instead Of 4-5/8", Add	*82.38*	
26 05 36 00-1092			**36" Radius Horizontal Crosses** *(26 05 36 00-0955)*		
26 05 36 00-1093		EA	6" Horizontal Cross, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,229.09	338.40
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-94.71*	
			For 6" Overall Height Instead Of 4-5/8", Add	*61.45*	
26 05 36 00-1094		EA	9" Horizontal Cross, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,294.08	360.74
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-99.34*	
			For 6" Overall Height Instead Of 4-5/8", Add	*64.70*	
26 05 36 00-1095		EA	12" Horizontal Cross, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,378.21	386.34
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-105.63*	
			For 6" Overall Height Instead Of 4-5/8", Add	*68.91*	
26 05 36 00-1096		EA	18" Horizontal Cross, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,477.45	416.80
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-113.02*	
			For 6" Overall Height Instead Of 4-5/8", Add	*73.87*	
26 05 36 00-1097		EA	24" Horizontal Cross, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,789.70	491.81
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-137.98*	
			For 6" Overall Height Instead Of 4-5/8", Add	*89.49*	
26 05 36 00-1098		EA	30" Horizontal Cross, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,974.81	540.54
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-152.43*	
			For 6" Overall Height Instead Of 4-5/8", Add	*98.74*	
26 05 36 00-1099		EA	36" Horizontal Cross, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	2,198.66	602.13
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-169.69*	
			For 6" Overall Height Instead Of 4-5/8", Add	*109.93*	
26 05 36 00-1100			**12" Radius Vertical Crosses** *(26 05 36 00-0955)*		
26 05 36 00-1101		EA	6" Vertical Cross, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	745.64	270.72
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-52.00*	
			For 6" Overall Height Instead Of 4-5/8", Add	*37.28*	
26 05 36 00-1102		EA	9" Vertical Cross, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	800.53	284.94
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-56.31*	
			For 6" Overall Height Instead Of 4-5/8", Add	*40.03*	
26 05 36 00-1103		EA	12" Vertical Cross, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	829.88	300.50
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-57.95*	
			For 6" Overall Height Instead Of 4-5/8", Add	*41.49*	
26 05 36 00-1104		EA	18" Vertical Cross, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	929.63	318.78
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-66.40*	
			For 6" Overall Height Instead Of 4-5/8", Add	*46.48*	
26 05 36 00-1105		EA	24" Vertical Cross, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	1,013.50	360.74
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-71.29*	
			For 6" Overall Height Instead Of 4-5/8", Add	*50.68*	
26 05 36 00-1106		EA	30" Vertical Cross, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	1,129.09	386.46
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-80.70*	
			For 6" Overall Height Instead Of 4-5/8", Add	*56.45*	
26 05 36 00-1107		EA	36" Vertical Cross, 6" Rung Spacing, 12" Radius, Aluminum Cable Tray	1,299.93	416.23
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-95.31*	
			For 6" Overall Height Instead Of 4-5/8", Add	*65.00*	
26 05 36 00-1108			**24" Radius Vertical Crosses** *(26 05 36 00-0955)*		
26 05 36 00-1109		EA	6" Vertical Cross, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,065.53	300.50
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-81.51*	
			For 6" Overall Height Instead Of 4-5/8", Add	*53.28*	
26 05 36 00-1110		EA	9" Vertical Cross, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,113.03	318.66
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-84.75*	
			For 6" Overall Height Instead Of 4-5/8", Add	*55.65*	
26 05 36 00-1111		EA	12" Vertical Cross, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,163.28	338.40
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-88.13*	
			For 6" Overall Height Instead Of 4-5/8", Add	*58.16*	
26 05 36 00-1112		EA	18" Vertical Cross, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,231.73	360.74
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-93.11*	
			For 6" Overall Height Instead Of 4-5/8", Add	*61.59*	
26 05 36 00-1113		EA	24" Vertical Cross, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,380.46	416.80
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-103.32*	
			For 6" Overall Height Instead Of 4-5/8", Add	*69.02*	
26 05 36 00-1114		EA	30" Vertical Cross, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,486.37	451.20
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-111.04*	
			For 6" Overall Height Instead Of 4-5/8", Add	*74.32*	
26 05 36 00-1115		EA	36" Vertical Cross, 6" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,647.67	491.81
			For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-123.78*	
			For 6" Overall Height Instead Of 4-5/8", Add	*82.38*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1116		**36" Radius Vertical Crosses** *(26 05 36 00-0955)*		
26 05 36 00-1117	EA	6" Vertical Cross, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,528.38	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-124.64*	
		For 6" Overall Height Instead Of 4-5/8", Add	*76.42*	
26 05 36 00-1118	EA	9" Vertical Cross, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,605.85	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-130.52*	
		For 6" Overall Height Instead Of 4-5/8", Add	*80.29*	
26 05 36 00-1119	EA	12" Vertical Cross, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,708.68	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-138.68*	
		For 6" Overall Height Instead Of 4-5/8", Add	*85.43*	
26 05 36 00-1120	EA	18" Vertical Cross, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,829.74	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-148.25*	
		For 6" Overall Height Instead Of 4-5/8", Add	*91.49*	
26 05 36 00-1121	EA	24" Vertical Cross, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	2,226.16	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-181.63*	
		For 6" Overall Height Instead Of 4-5/8", Add	*111.31*	
26 05 36 00-1122	EA	30" Vertical Cross, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	2,458.04	540.54
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-200.76*	
		For 6" Overall Height Instead Of 4-5/8", Add	*122.90*	
26 05 36 00-1123	EA	36" Vertical Cross, 6" Rung Spacing, 36" Radius, Aluminum Cable Tray	2,736.45	602.13
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-223.47*	
		For 6" Overall Height Instead Of 4-5/8", Add	*136.82*	
26 05 36 00-1124		**9" Rung Tray Fittings** *(26 05 36 00-0744)*		
26 05 36 00-1125		**90 Degree, 12" Radius Horizontal Elbows** *(26 05 36 00-1124)*		
26 05 36 00-1126	EA	6" Horizontal 90 Degree Elbow, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	302.53	113.14
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-20.83*	
		For 6" Overall Height Instead Of 4-5/8", Add	*15.13*	
26 05 36 00-1127	EA	9" Horizontal 90 Degree Elbow, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	331.69	128.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-22.43*	
		For 6" Overall Height Instead Of 4-5/8", Add	*16.58*	
26 05 36 00-1128	EA	12" Horizontal 90 Degree Elbow, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	375.93	142.47
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-25.72*	
		For 6" Overall Height Instead Of 4-5/8", Add	*18.80*	
26 05 36 00-1129	EA	18" Horizontal 90 Degree Elbow, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	446.90	174.62
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-30.14*	
		For 6" Overall Height Instead Of 4-5/8", Add	*22.35*	
26 05 36 00-1130	EA	24" Horizontal 90 Degree Elbow, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	527.53	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-36.05*	
		For 6" Overall Height Instead Of 4-5/8", Add	*26.38*	
26 05 36 00-1131	EA	30" Horizontal 90 Degree Elbow, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	580.95	225.60
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.30*	
		For 6" Overall Height Instead Of 4-5/8", Add	*29.05*	
26 05 36 00-1132	EA	36" Horizontal 90 Degree Elbow, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	678.00	257.86
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-46.31*	
		For 6" Overall Height Instead Of 4-5/8", Add	*33.90*	
26 05 36 00-1133		**90 Degree, 24" Radius Horizontal Elbows** *(26 05 36 00-1124)*		
26 05 36 00-1134	EA	6" Horizontal 90 Degree Elbow, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	398.18	117.65
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-30.01*	
		For 6" Overall Height Instead Of 4-5/8", Add	*19.91*	
26 05 36 00-1135	EA	9" Horizontal 90 Degree Elbow, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	436.15	135.25
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-32.34*	
		For 6" Overall Height Instead Of 4-5/8", Add	*21.81*	
26 05 36 00-1136	EA	12" Horizontal 90 Degree Elbow, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	471.50	150.37
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-34.62*	
		For 6" Overall Height Instead Of 4-5/8", Add	*23.58*	
26 05 36 00-1137	EA	18" Horizontal 90 Degree Elbow, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	550.85	186.79
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.52*	
		For 6" Overall Height Instead Of 4-5/8", Add	*27.54*	
26 05 36 00-1138	EA	24" Horizontal 90 Degree Elbow, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	623.77	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-44.32*	
		For 6" Overall Height Instead Of 4-5/8", Add	*31.19*	
26 05 36 00-1139	EA	30" Horizontal 90 Degree Elbow, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	697.12	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-49.22*	
		For 6" Overall Height Instead Of 4-5/8", Add	*34.86*	
26 05 36 00-1140	EA	36" Horizontal 90 Degree Elbow, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	798.06	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-56.07*	
		For 6" Overall Height Instead Of 4-5/8", Add	*39.90*	
26 05 36 00-1141		**90 Degree, 36" Radius Horizontal Elbows** *(26 05 36 00-1124)*		
26 05 36 00-1142	EA	6" Horizontal 90 Degree Elbow, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	427.22	122.95
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-32.47*	
		For 6" Overall Height Instead Of 4-5/8", Add	*21.36*	
26 05 36 00-1143	EA	9" Horizontal 90 Degree Elbow, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	465.22	142.36
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-34.66*	
		For 6" Overall Height Instead Of 4-5/8", Add	*23.26*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1144	EA	12" Horizontal 90 Degree Elbow, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	519.57	159.28
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-38.68*	
		For 6" Overall Height Instead Of 4-5/8", Add	*25.98*	
26 05 36 00-1145	EA	18" Horizontal 90 Degree Elbow, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	619.90	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-45.28*	
		For 6" Overall Height Instead Of 4-5/8", Add	*31.00*	
26 05 36 00-1146	EA	24" Horizontal 90 Degree Elbow, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	715.52	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-51.94*	
		For 6" Overall Height Instead Of 4-5/8", Add	*35.78*	
26 05 36 00-1147	EA	30" Horizontal 90 Degree Elbow, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	806.26	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-58.07*	
		For 6" Overall Height Instead Of 4-5/8", Add	*40.31*	
26 05 36 00-1148	EA	36" Horizontal 90 Degree Elbow, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	937.10	318.10
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-67.21*	
		For 6" Overall Height Instead Of 4-5/8", Add	*46.86*	

26 05 36 00-1149 45 Degree, 12" Radius Horizontal Elbows *(26 05 36 00-1124)*

26 05 36 00-1150	EA	6" Horizontal 45 Degree Elbow, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	211.67	82.01
		For 60 Degree Bend, Deduct	*-38.43*	
		For 30 Degree Bend, Deduct	*-68.60*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-14.34*	
		For 6" Overall Height Instead Of 4-5/8", Add	*10.58*	
26 05 36 00-1151	EA	9" Horizontal 45 Degree Elbow, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	241.80	98.36
		For 60 Degree Bend, Deduct	*-42.11*	
		For 30 Degree Bend, Deduct	*-75.64*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-15.99*	
		For 6" Overall Height Instead Of 4-5/8", Add	*12.09*	
26 05 36 00-1152	EA	12" Horizontal 45 Degree Elbow, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	268.83	112.80
		For 60 Degree Bend, Deduct	*-45.47*	
		For 30 Degree Bend, Deduct	*-82.06*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-17.48*	
		For 6" Overall Height Instead Of 4-5/8", Add	*13.44*	
26 05 36 00-1153	EA	18" Horizontal 45 Degree Elbow, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	332.84	142.58
		For 60 Degree Bend, Deduct	*-55.19*	
		For 30 Degree Bend, Deduct	*-99.91*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-21.41*	
		For 6" Overall Height Instead Of 4-5/8", Add	*16.64*	
26 05 36 00-1154	EA	24" Horizontal 45 Degree Elbow, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	409.37	174.62
		For 60 Degree Bend, Deduct	*-68.16*	
		For 30 Degree Bend, Deduct	*-123.30*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-26.39*	
		For 6" Overall Height Instead Of 4-5/8", Add	*20.47*	
26 05 36 00-1155	EA	30" Horizontal 45 Degree Elbow, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	469.79	200.45
		For 60 Degree Bend, Deduct	*-78.18*	
		For 30 Degree Bend, Deduct	*-141.44*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-30.27*	
		For 6" Overall Height Instead Of 4-5/8", Add	*23.49*	
26 05 36 00-1156	EA	36" Horizontal 45 Degree Elbow, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	533.66	235.30
		For 60 Degree Bend, Deduct	*-85.90*	
		For 30 Degree Bend, Deduct	*-156.24*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-33.76*	
		For 6" Overall Height Instead Of 4-5/8", Add	*26.68*	

26 05 36 00-1157 45 Degree, 24" Radius Horizontal Elbows *(26 05 36 00-1124)*

26 05 36 00-1158	EA	6" Horizontal 45 Degree Elbow, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	241.97	84.60
		For 60 Degree Bend, Deduct	*-47.43*	
		For 30 Degree Bend, Deduct	*-83.75*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-17.15*	
		For 6" Overall Height Instead Of 4-5/8", Add	*12.10*	
26 05 36 00-1159	EA	9" Horizontal 45 Degree Elbow, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	282.56	101.97
		For 60 Degree Bend, Deduct	*-54.15*	
		For 30 Degree Bend, Deduct	*-95.92*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-19.76*	
		For 6" Overall Height Instead Of 4-5/8", Add	*14.13*	
26 05 36 00-1160	EA	12" Horizontal 45 Degree Elbow, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	311.72	117.76
		For 60 Degree Bend, Deduct	*-57.73*	
		For 30 Degree Bend, Deduct	*-102.76*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-21.36*	
		For 6" Overall Height Instead Of 4-5/8", Add	*15.59*	
26 05 36 00-1161	EA	18" Horizontal 45 Degree Elbow, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	374.80	150.37
		For 60 Degree Bend, Deduct	*-66.03*	
		For 30 Degree Bend, Deduct	*-118.41*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-24.95*	
		For 6" Overall Height Instead Of 4-5/8", Add	*18.74*	
26 05 36 00-1162	EA	24" Horizontal 45 Degree Elbow, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	455.59	186.79
		For 60 Degree Bend, Deduct	*-78.75*	
		For 30 Degree Bend, Deduct	*-141.63*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-30.00*	
		For 6" Overall Height Instead Of 4-5/8", Add	*22.78*	
26 05 36 00-1163	EA	30" Horizontal 45 Degree Elbow, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	534.28	216.69
		For 60 Degree Bend, Deduct	*-93.26*	
		For 30 Degree Bend, Deduct	*-167.48*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-35.37*	
		For 6" Overall Height Instead Of 4-5/8", Add	*26.71*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1164	EA	36" Horizontal 45 Degree Elbow, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	611.74	257.97
		For 60 Degree Bend, Deduct	*-103.00*	
		For 30 Degree Bend, Deduct	*-186.00*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.68*	
		For 6" Overall Height Instead Of 4-5/8", Add	*30.59*	
26 05 36 00-1165		**45 Degree, 36" Radius Horizontal Elbows** *(26 05 36 00-1124)*		
26 05 36 00-1166	EA	6" Horizontal 45 Degree Elbow, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	281.11	87.31
		For 60 Degree Bend, Deduct	*-59.32*	
		For 30 Degree Bend, Deduct	*-103.71*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-20.84*	
		For 6" Overall Height Instead Of 4-5/8", Add	*14.06*	
26 05 36 00-1167	EA	9" Horizontal 45 Degree Elbow, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	315.25	106.03
		For 60 Degree Bend, Deduct	*-63.39*	
		For 30 Degree Bend, Deduct	*-111.55*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-22.69*	
		For 6" Overall Height Instead Of 4-5/8", Add	*15.76*	
26 05 36 00-1168	EA	12" Horizontal 45 Degree Elbow, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	346.54	123.06
		For 60 Degree Bend, Deduct	*-67.19*	
		For 30 Degree Bend, Deduct	*-118.82*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-24.40*	
		For 6" Overall Height Instead Of 4-5/8", Add	*17.33*	
26 05 36 00-1169	EA	18" Horizontal 45 Degree Elbow, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	421.42	159.28
		For 60 Degree Bend, Deduct	*-77.99*	
		For 30 Degree Bend, Deduct	*-138.84*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-28.87*	
		For 6" Overall Height Instead Of 4-5/8", Add	*21.07*	
26 05 36 00-1170	EA	24" Horizontal 45 Degree Elbow, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	524.64	200.45
		For 60 Degree Bend, Deduct	*-96.28*	
		For 30 Degree Bend, Deduct	*-171.61*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-35.76*	
		For 6" Overall Height Instead Of 4-5/8", Add	*26.23*	
26 05 36 00-1171	EA	30" Horizontal 45 Degree Elbow, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	594.28	235.30
		For 60 Degree Bend, Deduct	*-105.90*	
		For 30 Degree Bend, Deduct	*-189.58*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.82*	
		For 6" Overall Height Instead Of 4-5/8", Add	*29.71*	
26 05 36 00-1172	EA	36" Horizontal 45 Degree Elbow, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	697.02	284.82
		For 60 Degree Bend, Deduct	*-120.82*	
		For 30 Degree Bend, Deduct	*-217.20*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-45.96*	
		For 6" Overall Height Instead Of 4-5/8", Add	*34.85*	
26 05 36 00-1173		**90 Degree, 12" Radius Vertical Risers** *(26 05 36 00-1124)*		
26 05 36 00-1174	EA	6" Vertical Riser 90 Degree, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	346.77	112.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-25.28*	
		For 6" Overall Height Instead Of 4-5/8", Add	*17.34*	
26 05 36 00-1175	EA	9" Vertical Riser 90 Degree, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	382.21	128.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-27.48*	
		For 6" Overall Height Instead Of 4-5/8", Add	*19.11*	
26 05 36 00-1176	EA	12" Vertical Riser 90 Degree, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	407.68	142.47
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-28.90*	
		For 6" Overall Height Instead Of 4-5/8", Add	*20.38*	
26 05 36 00-1177	EA	18" Vertical Riser 90 Degree, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	467.11	174.62
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-32.16*	
		For 6" Overall Height Instead Of 4-5/8", Add	*23.36*	
26 05 36 00-1178	EA	24" Vertical Riser 90 Degree, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	518.87	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-35.18*	
		For 6" Overall Height Instead Of 4-5/8", Add	*25.94*	
26 05 36 00-1179	EA	30" Vertical Riser 90 Degree, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	569.41	225.60
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-38.14*	
		For 6" Overall Height Instead Of 4-5/8", Add	*28.47*	
26 05 36 00-1180	EA	36" Vertical Riser 90 Degree, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	628.40	257.52
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-41.38*	
		For 6" Overall Height Instead Of 4-5/8", Add	*31.42*	
26 05 36 00-1181		**90 Degree, 24" Radius Vertical Risers** *(26 05 36 00-1124)*		
26 05 36 00-1182	EA	6" Vertical Riser 90 Degree, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	367.87	117.65
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-26.98*	
		For 6" Overall Height Instead Of 4-5/8", Add	*18.39*	
26 05 36 00-1183	EA	9" Vertical Riser 90 Degree, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	404.57	135.36
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-29.18*	
		For 6" Overall Height Instead Of 4-5/8", Add	*20.23*	
26 05 36 00-1184	EA	12" Vertical Riser 90 Degree, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	433.97	150.37
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-30.86*	
		For 6" Overall Height Instead Of 4-5/8", Add	*21.70*	
26 05 36 00-1185	EA	18" Vertical Riser 90 Degree, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	504.67	186.79
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-34.90*	
		For 6" Overall Height Instead Of 4-5/8", Add	*25.23*	
26 05 36 00-1186	EA	24" Vertical Riser 90 Degree, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	566.03	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-38.55*	
		For 6" Overall Height Instead Of 4-5/8", Add	*28.30*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1187	EA	30" Vertical Riser 90 Degree, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	626.39	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-42.14*	
		For 6" Overall Height Instead Of 4-5/8", Add	*31.32*	
26 05 36 00-1188	EA	36" Vertical Riser 90 Degree, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	705.68	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-46.83*	
		For 6" Overall Height Instead Of 4-5/8", Add	*35.28*	
26 05 36 00-1189		**90 Degree, 36" Radius Vertical Risers** *(26 05 36 00-1124)*		
26 05 36 00-1190	EA	6" Vertical Riser 90 Degree, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	470.53	122.95
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-36.81*	
		For 6" Overall Height Instead Of 4-5/8", Add	*23.53*	
26 05 36 00-1191	EA	9" Vertical Riser 90 Degree, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	508.72	142.47
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.00*	
		For 6" Overall Height Instead Of 4-5/8", Add	*25.44*	
26 05 36 00-1192	EA	12" Vertical Riser 90 Degree, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	554.21	159.28
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-42.14*	
		For 6" Overall Height Instead Of 4-5/8", Add	*27.71*	
26 05 36 00-1193	EA	18" Vertical Riser 90 Degree, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	634.34	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-46.73*	
		For 6" Overall Height Instead Of 4-5/8", Add	*31.72*	
26 05 36 00-1194	EA	24" Vertical Riser 90 Degree, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	703.97	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-50.79*	
		For 6" Overall Height Instead Of 4-5/8", Add	*35.20*	
26 05 36 00-1195	EA	30" Vertical Riser 90 Degree, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	786.06	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-56.05*	
		For 6" Overall Height Instead Of 4-5/8", Add	*39.30*	
26 05 36 00-1196	EA	36" Vertical Riser 90 Degree, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	879.37	318.10
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-61.43*	
		For 6" Overall Height Instead Of 4-5/8", Add	*43.97*	
26 05 36 00-1197		**12" Radius Horizontal Tees** *(26 05 36 00-1124)*		
26 05 36 00-1198	EA	6" Horizontal Tee, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	537.17	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-35.66*	
		For 6" Overall Height Instead Of 4-5/8", Add	*26.86*	
26 05 36 00-1199	EA	9" Horizontal Tee, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	579.84	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-38.37*	
		For 6" Overall Height Instead Of 4-5/8", Add	*28.99*	
26 05 36 00-1200	EA	12" Horizontal Tee, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	600.41	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.55*	
		For 6" Overall Height Instead Of 4-5/8", Add	*30.02*	
26 05 36 00-1201	EA	18" Horizontal Tee, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	679.25	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-45.37*	
		For 6" Overall Height Instead Of 4-5/8", Add	*33.96*	
26 05 36 00-1202	EA	24" Horizontal Tee, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	752.03	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-50.16*	
		For 6" Overall Height Instead Of 4-5/8", Add	*37.60*	
26 05 36 00-1203	EA	30" Horizontal Tee, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	822.63	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-55.71*	
		For 6" Overall Height Instead Of 4-5/8", Add	*41.13*	
26 05 36 00-1204	EA	36" Horizontal Tee, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	950.57	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-64.99*	
		For 6" Overall Height Instead Of 4-5/8", Add	*47.53*	
26 05 36 00-1205		**24" Radius Horizontal Tees** *(26 05 36 00-1124)*		
26 05 36 00-1206	EA	6" Horizontal Tee, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	692.43	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-49.63*	
		For 6" Overall Height Instead Of 4-5/8", Add	*34.62*	
26 05 36 00-1207	EA	9" Horizontal Tee, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	747.42	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-53.25*	
		For 6" Overall Height Instead Of 4-5/8", Add	*37.37*	
26 05 36 00-1208	EA	12" Horizontal Tee, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	777.40	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-55.18*	
		For 6" Overall Height Instead Of 4-5/8", Add	*38.87*	
26 05 36 00-1209	EA	18" Horizontal Tee, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	855.95	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-60.55*	
		For 6" Overall Height Instead Of 4-5/8", Add	*42.80*	
26 05 36 00-1210	EA	24" Horizontal Tee, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	950.82	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-66.88*	
		For 6" Overall Height Instead Of 4-5/8", Add	*47.54*	
26 05 36 00-1211	EA	30" Horizontal Tee, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,025.62	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-72.50*	
		For 6" Overall Height Instead Of 4-5/8", Add	*51.28*	
26 05 36 00-1212	EA	36" Horizontal Tee, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,344.08	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-99.68*	
		For 6" Overall Height Instead Of 4-5/8", Add	*67.20*	
26 05 36 00-1213		**36" Radius Horizontal Tees** *(26 05 36 00-1124)*		
26 05 36 00-1214	EA	6" Horizontal Tee, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	854.22	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-63.93*	
		For 6" Overall Height Instead Of 4-5/8", Add	*42.71*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1215	EA	9" Horizontal Tee, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	910.64	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-67.33*	
		For 6" Overall Height Instead Of 4-5/8", Add	*45.53*	
26 05 36 00-1216	EA	12" Horizontal Tee, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	977.19	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-72.67*	
		For 6" Overall Height Instead Of 4-5/8", Add	*48.86*	
26 05 36 00-1217	EA	18" Horizontal Tee, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,066.28	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-78.43*	
		For 6" Overall Height Instead Of 4-5/8", Add	*53.31*	
26 05 36 00-1218	EA	24" Horizontal Tee, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,198.08	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-87.62*	
		For 6" Overall Height Instead Of 4-5/8", Add	*59.90*	
26 05 36 00-1219	EA	30" Horizontal Tee, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,396.04	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-104.88*	
		For 6" Overall Height Instead Of 4-5/8", Add	*69.80*	
26 05 36 00-1220	EA	36" Horizontal Tee, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,599.17	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-118.93*	
		For 6" Overall Height Instead Of 4-5/8", Add	*79.96*	
26 05 36 00-1221		**12" Radius Vertical Tees** *(26 05 36 00-1124)*		
26 05 36 00-1222	EA	6" Vertical Tee, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	729.60	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-56.25*	
		For 6" Overall Height Instead Of 4-5/8", Add	*36.48*	
26 05 36 00-1223	EA	9" Vertical Tee, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	754.32	208.35
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-58.07*	
		For 6" Overall Height Instead Of 4-5/8", Add	*37.72*	
26 05 36 00-1224	EA	12" Vertical Tee, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	770.99	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-59.05*	
		For 6" Overall Height Instead Of 4-5/8", Add	*38.55*	
26 05 36 00-1225	EA	18" Vertical Tee, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	810.78	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-61.47*	
		For 6" Overall Height Instead Of 4-5/8", Add	*40.54*	
26 05 36 00-1226	EA	24" Vertical Tee, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	863.10	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-65.82*	
		For 6" Overall Height Instead Of 4-5/8", Add	*43.16*	
26 05 36 00-1227	EA	30" Vertical Tee, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	913.07	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-68.75*	
		For 6" Overall Height Instead Of 4-5/8", Add	*45.65*	
26 05 36 00-1228	EA	36" Vertical Tee, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	977.19	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-72.67*	
		For 6" Overall Height Instead Of 4-5/8", Add	*48.86*	
26 05 36 00-1229		**24" Radius Vertical Tees** *(26 05 36 00-1124)*		
26 05 36 00-1230	EA	6" Vertical Tee, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,030.79	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-85.03*	
		For 6" Overall Height Instead Of 4-5/8", Add	*51.54*	
26 05 36 00-1231	EA	9" Vertical Tee, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,054.37	225.60
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-86.64*	
		For 6" Overall Height Instead Of 4-5/8", Add	*52.72*	
26 05 36 00-1232	EA	12" Vertical Tee, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,079.24	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-88.31*	
		For 6" Overall Height Instead Of 4-5/8", Add	*53.96*	
26 05 36 00-1233	EA	18" Vertical Tee, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,137.12	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-92.22*	
		For 6" Overall Height Instead Of 4-5/8", Add	*56.86*	
26 05 36 00-1234	EA	24" Vertical Tee, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,175.76	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-95.02*	
		For 6" Overall Height Instead Of 4-5/8", Add	*58.79*	
26 05 36 00-1235	EA	30" Vertical Tee, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,242.77	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-99.23*	
		For 6" Overall Height Instead Of 4-5/8", Add	*62.14*	
26 05 36 00-1236	EA	36" Vertical Tee, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,372.27	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-109.03*	
		For 6" Overall Height Instead Of 4-5/8", Add	*68.61*	
26 05 36 00-1237		**36" Radius Vertical Tees** *(26 05 36 00-1124)*		
26 05 36 00-1238	EA	6" Vertical Tee, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,666.25	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-147.01*	
		For 6" Overall Height Instead Of 4-5/8", Add	*83.31*	
26 05 36 00-1239	EA	9" Vertical Tee, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,700.47	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-149.55*	
		For 6" Overall Height Instead Of 4-5/8", Add	*85.02*	
26 05 36 00-1240	EA	12" Vertical Tee, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,737.00	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-152.21*	
		For 6" Overall Height Instead Of 4-5/8", Add	*86.85*	
26 05 36 00-1241	EA	18" Vertical Tee, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,798.44	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-156.11*	
		For 6" Overall Height Instead Of 4-5/8", Add	*89.92*	
26 05 36 00-1242	EA	24" Vertical Tee, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,841.12	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-159.07*	
		For 6" Overall Height Instead Of 4-5/8", Add	*92.06*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1243	EA	30" Vertical Tee, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,953.85	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-167.19*	
		For 6" Overall Height Instead Of 4-5/8", Add	*97.69*	
26 05 36 00-1244	EA	36" Vertical Tee, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	2,050.23	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-172.83*	
		For 6" Overall Height Instead Of 4-5/8", Add	*102.51*	
26 05 36 00-1245		**12" Radius Horizontal Crosses** *(26 05 36 00-1124)*		
26 05 36 00-1246	EA	6" Horizontal Cross, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	696.57	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-47.10*	
		For 6" Overall Height Instead Of 4-5/8", Add	*34.83*	
26 05 36 00-1247	EA	9" Horizontal Cross, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	746.10	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-50.87*	
		For 6" Overall Height Instead Of 4-5/8", Add	*37.31*	
26 05 36 00-1248	EA	12" Horizontal Cross, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	775.13	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-52.47*	
		For 6" Overall Height Instead Of 4-5/8", Add	*38.76*	
26 05 36 00-1249	EA	18" Horizontal Cross, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	863.04	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-59.75*	
		For 6" Overall Height Instead Of 4-5/8", Add	*43.15*	
26 05 36 00-1250	EA	24" Horizontal Cross, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	944.80	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-64.42*	
		For 6" Overall Height Instead Of 4-5/8", Add	*47.24*	
26 05 36 00-1251	EA	30" Horizontal Cross, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	1,047.98	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-72.61*	
		For 6" Overall Height Instead Of 4-5/8", Add	*52.40*	
26 05 36 00-1252	EA	36" Horizontal Cross, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	1,199.75	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-85.25*	
		For 6" Overall Height Instead Of 4-5/8", Add	*59.99*	
26 05 36 00-1253		**24" Radius Horizontal Crosses** *(26 05 36 00-1124)*		
26 05 36 00-1254	EA	6" Horizontal Cross, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	971.42	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-72.10*	
		For 6" Overall Height Instead Of 4-5/8", Add	*48.57*	
26 05 36 00-1255	EA	9" Horizontal Cross, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,016.03	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-75.05*	
		For 6" Overall Height Instead Of 4-5/8", Add	*50.80*	
26 05 36 00-1256	EA	12" Horizontal Cross, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,063.40	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-78.14*	
		For 6" Overall Height Instead Of 4-5/8", Add	*53.17*	
26 05 36 00-1257	EA	18" Horizontal Cross, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,126.66	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-82.60*	
		For 6" Overall Height Instead Of 4-5/8", Add	*56.33*	
26 05 36 00-1258	EA	24" Horizontal Cross, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,266.14	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-91.89*	
		For 6" Overall Height Instead Of 4-5/8", Add	*63.31*	
26 05 36 00-1259	EA	30" Horizontal Cross, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,363.98	451.20
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-98.80*	
		For 6" Overall Height Instead Of 4-5/8", Add	*68.20*	
26 05 36 00-1260	EA	36" Horizontal Cross, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,509.69	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-109.98*	
		For 6" Overall Height Instead Of 4-5/8", Add	*75.48*	
26 05 36 00-1261		**36" Radius Horizontal Crosses** *(26 05 36 00-1124)*		
26 05 36 00-1262	EA	6" Horizontal Cross, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,118.24	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-83.62*	
		For 6" Overall Height Instead Of 4-5/8", Add	*55.91*	
26 05 36 00-1263	EA	9" Horizontal Cross, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,178.62	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-87.80*	
		For 6" Overall Height Instead Of 4-5/8", Add	*58.93*	
26 05 36 00-1264	EA	12" Horizontal Cross, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,255.82	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-93.39*	
		For 6" Overall Height Instead Of 4-5/8", Add	*62.79*	
26 05 36 00-1265	EA	18" Horizontal Cross, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,346.97	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-99.97*	
		For 6" Overall Height Instead Of 4-5/8", Add	*67.35*	
26 05 36 00-1266	EA	24" Horizontal Cross, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,628.04	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-121.82*	
		For 6" Overall Height Instead Of 4-5/8", Add	*81.40*	
26 05 36 00-1267	EA	30" Horizontal Cross, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,795.83	540.54
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-134.54*	
		For 6" Overall Height Instead Of 4-5/8", Add	*89.79*	
26 05 36 00-1268	EA	36" Horizontal Cross, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,999.48	602.13
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-149.77*	
		For 6" Overall Height Instead Of 4-5/8", Add	*99.97*	
26 05 36 00-1269		**12" Radius Vertical Crosses** *(26 05 36 00-1124)*		
26 05 36 00-1270	EA	6" Vertical Cross, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	696.57	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-47.10*	
		For 6" Overall Height Instead Of 4-5/8", Add	*34.83*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1271	EA	9" Vertical Cross, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	746.10	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-50.87*	
		For 6" Overall Height Instead Of 4-5/8", Add	*37.31*	
26 05 36 00-1272	EA	12" Vertical Cross, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	775.13	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-52.47*	
		For 6" Overall Height Instead Of 4-5/8", Add	*38.76*	
26 05 36 00-1273	EA	18" Vertical Cross, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	863.04	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-59.75*	
		For 6" Overall Height Instead Of 4-5/8", Add	*43.15*	
26 05 36 00-1274	EA	24" Vertical Cross, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	944.80	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-64.42*	
		For 6" Overall Height Instead Of 4-5/8", Add	*47.24*	
26 05 36 00-1275	EA	30" Vertical Cross, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	1,047.98	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-72.61*	
		For 6" Overall Height Instead Of 4-5/8", Add	*52.40*	
26 05 36 00-1276	EA	36" Vertical Cross, 9" Rung Spacing, 12" Radius, Aluminum Cable Tray	1,198.05	415.67
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-85.16*	
		For 6" Overall Height Instead Of 4-5/8", Add	*59.90*	
26 05 36 00-1277		**24" Radius Vertical Crosses** *(26 05 36 00-1124)*		
26 05 36 00-1278	EA	6" Vertical Cross, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	971.42	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-72.10*	
		For 6" Overall Height Instead Of 4-5/8", Add	*48.57*	
26 05 36 00-1279	EA	9" Vertical Cross, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,016.03	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-75.05*	
		For 6" Overall Height Instead Of 4-5/8", Add	*50.80*	
26 05 36 00-1280	EA	12" Vertical Cross, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,063.40	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-78.14*	
		For 6" Overall Height Instead Of 4-5/8", Add	*53.17*	
26 05 36 00-1281	EA	18" Vertical Cross, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,126.66	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-82.60*	
		For 6" Overall Height Instead Of 4-5/8", Add	*56.33*	
26 05 36 00-1282	EA	24" Vertical Cross, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,266.14	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-91.89*	
		For 6" Overall Height Instead Of 4-5/8", Add	*63.31*	
26 05 36 00-1283	EA	30" Vertical Cross, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,363.98	451.20
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-98.80*	
		For 6" Overall Height Instead Of 4-5/8", Add	*68.20*	
26 05 36 00-1284	EA	36" Vertical Cross, 9" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,509.69	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-109.98*	
		For 6" Overall Height Instead Of 4-5/8", Add	*75.48*	
26 05 36 00-1285		**36" Radius Vertical Crosses** *(26 05 36 00-1124)*		
26 05 36 00-1286	EA	6" Vertical Cross, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,367.65	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-108.57*	
		For 6" Overall Height Instead Of 4-5/8", Add	*68.38*	
26 05 36 00-1287	EA	9" Vertical Cross, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,438.42	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-113.78*	
		For 6" Overall Height Instead Of 4-5/8", Add	*71.92*	
26 05 36 00-1288	EA	12" Vertical Cross, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,531.21	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-120.93*	
		For 6" Overall Height Instead Of 4-5/8", Add	*76.56*	
26 05 36 00-1289	EA	18" Vertical Cross, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,640.55	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-129.33*	
		For 6" Overall Height Instead Of 4-5/8", Add	*82.03*	
26 05 36 00-1290	EA	24" Vertical Cross, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,991.76	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-158.19*	
		For 6" Overall Height Instead Of 4-5/8", Add	*99.59*	
26 05 36 00-1291	EA	30" Vertical Cross, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	2,198.52	540.54
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-174.80*	
		For 6" Overall Height Instead Of 4-5/8", Add	*109.93*	
26 05 36 00-1292	EA	36" Vertical Cross, 9" Rung Spacing, 36" Radius, Aluminum Cable Tray	2,447.63	602.13
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-194.58*	
		For 6" Overall Height Instead Of 4-5/8", Add	*122.38*	
26 05 36 00-1293		**12" Rung Tray Fittings** *(26 05 36 00-0744)*		
26 05 36 00-1294		**90 Degree, 12" Radius Horizontal Elbows** *(26 05 36 00-1293)*		
26 05 36 00-1295	EA	6" Horizontal 90 Degree Elbow, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	294.55	113.14
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-20.03*	
		For 6" Overall Height Instead Of 4-5/8", Add	*14.73*	
26 05 36 00-1296	EA	9" Horizontal 90 Degree Elbow, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	323.51	128.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-21.61*	
		For 6" Overall Height Instead Of 4-5/8", Add	*16.18*	
26 05 36 00-1297	EA	12" Horizontal 90 Degree Elbow, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	366.23	142.47
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-24.75*	
		For 6" Overall Height Instead Of 4-5/8", Add	*18.31*	
26 05 36 00-1298	EA	18" Horizontal 90 Degree Elbow, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	435.99	174.62
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-29.05*	
		For 6" Overall Height Instead Of 4-5/8", Add	*21.80*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1299	EA	24" Horizontal 90 Degree Elbow, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	513.99	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-34.69*	
		For 6" Overall Height Instead Of 4-5/8", Add	*25.70*	
26 05 36 00-1300	EA	30" Horizontal 90 Degree Elbow, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	566.61	225.60
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-37.86*	
		For 6" Overall Height Instead Of 4-5/8", Add	*28.33*	
26 05 36 00-1301	EA	36" Horizontal 90 Degree Elbow, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	660.63	257.86
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-44.58*	
		For 6" Overall Height Instead Of 4-5/8", Add	*33.03*	

26 05 36 00-1302 90 Degree, 24" Radius Horizontal Elbows *(26 05 36 00-1293)*

26 05 36 00-1303	EA	6" Horizontal 90 Degree Elbow, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	384.03	117.65
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-28.60*	
		For 6" Overall Height Instead Of 4-5/8", Add	*19.20*	
26 05 36 00-1304	EA	9" Horizontal 90 Degree Elbow, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	421.40	135.25
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-30.87*	
		For 6" Overall Height Instead Of 4-5/8", Add	*21.07*	
26 05 36 00-1305	EA	12" Horizontal 90 Degree Elbow, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	456.04	150.37
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-33.07*	
		For 6" Overall Height Instead Of 4-5/8", Add	*22.80*	
26 05 36 00-1306	EA	18" Horizontal 90 Degree Elbow, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	534.08	186.79
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-37.85*	
		For 6" Overall Height Instead Of 4-5/8", Add	*26.70*	
26 05 36 00-1307	EA	24" Horizontal 90 Degree Elbow, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	605.38	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-42.48*	
		For 6" Overall Height Instead Of 4-5/8", Add	*30.27*	
26 05 36 00-1308	EA	30" Horizontal 90 Degree Elbow, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	677.01	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-47.21*	
		For 6" Overall Height Instead Of 4-5/8", Add	*33.85*	
26 05 36 00-1309	EA	36" Horizontal 90 Degree Elbow, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	775.43	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-53.81*	
		For 6" Overall Height Instead Of 4-5/8", Add	*38.77*	

26 05 36 00-1310 90 Degree, 36" Radius Horizontal Elbows *(26 05 36 00-1293)*

26 05 36 00-1311	EA	6" Horizontal 90 Degree Elbow, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	411.67	122.95
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-30.92*	
		For 6" Overall Height Instead Of 4-5/8", Add	*20.58*	
26 05 36 00-1312	EA	9" Horizontal 90 Degree Elbow, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	449.25	142.36
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-33.07*	
		For 6" Overall Height Instead Of 4-5/8", Add	*22.46*	
26 05 36 00-1313	EA	12" Horizontal 90 Degree Elbow, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	501.79	159.28
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-36.90*	
		For 6" Overall Height Instead Of 4-5/8", Add	*25.09*	
26 05 36 00-1314	EA	18" Horizontal 90 Degree Elbow, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	599.90	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-43.28*	
		For 6" Overall Height Instead Of 4-5/8", Add	*30.00*	
26 05 36 00-1315	EA	24" Horizontal 90 Degree Elbow, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	692.89	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-49.68*	
		For 6" Overall Height Instead Of 4-5/8", Add	*34.64*	
26 05 36 00-1316	EA	30" Horizontal 90 Degree Elbow, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	781.41	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-55.58*	
		For 6" Overall Height Instead Of 4-5/8", Add	*39.07*	
26 05 36 00-1317	EA	36" Horizontal 90 Degree Elbow, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	908.61	318.10
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-64.36*	
		For 6" Overall Height Instead Of 4-5/8", Add	*45.43*	

26 05 36 00-1318 45 Degree, 12" Radius Horizontal Elbows *(26 05 36 00-1293)*

26 05 36 00-1319	EA	6" Horizontal 45 Degree Elbow, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	206.42	82.01
		For 60 Degree Bend, Deduct	*-36.70*	
		For 30 Degree Bend, Deduct	*-65.71*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-13.81*	
		For 6" Overall Height Instead Of 4-5/8", Add	*10.32*	
26 05 36 00-1320	EA	9" Horizontal 45 Degree Elbow, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	236.34	98.36
		For 60 Degree Bend, Deduct	*-40.30*	
		For 30 Degree Bend, Deduct	*-72.64*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-15.44*	
		For 6" Overall Height Instead Of 4-5/8", Add	*11.82*	
26 05 36 00-1321	EA	12" Horizontal 45 Degree Elbow, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	263.17	112.80
		For 60 Degree Bend, Deduct	*-43.61*	
		For 30 Degree Bend, Deduct	*-78.94*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-16.92*	
		For 6" Overall Height Instead Of 4-5/8", Add	*13.16*	
26 05 36 00-1322	EA	18" Horizontal 45 Degree Elbow, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	326.17	142.58
		For 60 Degree Bend, Deduct	*-52.99*	
		For 30 Degree Bend, Deduct	*-96.24*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-20.74*	
		For 6" Overall Height Instead Of 4-5/8", Add	*16.31*	
26 05 36 00-1323	EA	24" Horizontal 45 Degree Elbow, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	401.09	174.62
		For 60 Degree Bend, Deduct	*-65.43*	
		For 30 Degree Bend, Deduct	*-118.74*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-25.56*	
		For 6" Overall Height Instead Of 4-5/8", Add	*20.05*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1324	EA	30" Horizontal 45 Degree Elbow, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	460.30	200.45
		For 60 Degree Bend, Deduct	*-75.05*	
		For 30 Degree Bend, Deduct	*-136.22*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-29.32*	
		For 6" Overall Height Instead Of 4-5/8", Add	*23.02*	
26 05 36 00-1325	EA	36" Horizontal 45 Degree Elbow, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	523.76	235.30
		For 60 Degree Bend, Deduct	*-82.63*	
		For 30 Degree Bend, Deduct	*-150.79*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-32.77*	
		For 6" Overall Height Instead Of 4-5/8", Add	*26.19*	

26 05 36 00-1326 45 Degree, 24" Radius Horizontal Elbows *(26 05 36 00-1293)*

26 05 36 00-1327	EA	6" Horizontal 45 Degree Elbow, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	234.90	84.60
		For 60 Degree Bend, Deduct	*-45.10*	
		For 30 Degree Bend, Deduct	*-79.87*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-16.44*	
		For 6" Overall Height Instead Of 4-5/8", Add	*11.75*	
26 05 36 00-1328	EA	9" Horizontal 45 Degree Elbow, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	274.68	101.97
		For 60 Degree Bend, Deduct	*-51.55*	
		For 30 Degree Bend, Deduct	*-91.58*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-18.97*	
		For 6" Overall Height Instead Of 4-5/8", Add	*13.73*	
26 05 36 00-1329	EA	12" Horizontal 45 Degree Elbow, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	303.63	117.76
		For 60 Degree Bend, Deduct	*-55.06*	
		For 30 Degree Bend, Deduct	*-98.31*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-20.55*	
		For 6" Overall Height Instead Of 4-5/8", Add	*15.18*	
26 05 36 00-1330	EA	18" Horizontal 45 Degree Elbow, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	366.11	150.37
		For 60 Degree Bend, Deduct	*-63.16*	
		For 30 Degree Bend, Deduct	*-113.63*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-24.08*	
		For 6" Overall Height Instead Of 4-5/8", Add	*18.31*	
26 05 36 00-1331	EA	24" Horizontal 45 Degree Elbow, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	445.49	186.79
		For 60 Degree Bend, Deduct	*-75.42*	
		For 30 Degree Bend, Deduct	*-136.08*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-28.99*	
		For 6" Overall Height Instead Of 4-5/8", Add	*22.27*	
26 05 36 00-1332	EA	30" Horizontal 45 Degree Elbow, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	522.16	216.69
		For 60 Degree Bend, Deduct	*-89.26*	
		For 30 Degree Bend, Deduct	*-160.81*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-34.16*	
		For 6" Overall Height Instead Of 4-5/8", Add	*26.11*	
26 05 36 00-1333	EA	36" Horizontal 45 Degree Elbow, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	599.01	257.97
		For 60 Degree Bend, Deduct	*-98.80*	
		For 30 Degree Bend, Deduct	*-179.00*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-38.41*	
		For 6" Overall Height Instead Of 4-5/8", Add	*29.95*	

26 05 36 00-1334 45 Degree, 36" Radius Horizontal Elbows *(26 05 36 00-1293)*

26 05 36 00-1335	EA	6" Horizontal 45 Degree Elbow, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	271.62	87.31
		For 60 Degree Bend, Deduct	*-56.18*	
		For 30 Degree Bend, Deduct	*-98.49*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-19.89*	
		For 6" Overall Height Instead Of 4-5/8", Add	*13.58*	
26 05 36 00-1336	EA	9" Horizontal 45 Degree Elbow, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	305.55	106.03
		For 60 Degree Bend, Deduct	*-60.19*	
		For 30 Degree Bend, Deduct	*-106.21*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-21.72*	
		For 6" Overall Height Instead Of 4-5/8", Add	*15.28*	
26 05 36 00-1337	EA	12" Horizontal 45 Degree Elbow, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	336.64	123.06
		For 60 Degree Bend, Deduct	*-63.92*	
		For 30 Degree Bend, Deduct	*-113.37*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-23.41*	
		For 6" Overall Height Instead Of 4-5/8", Add	*16.83*	
26 05 36 00-1338	EA	18" Horizontal 45 Degree Elbow, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	410.51	159.28
		For 60 Degree Bend, Deduct	*-74.39*	
		For 30 Degree Bend, Deduct	*-132.84*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-27.77*	
		For 6" Overall Height Instead Of 4-5/8", Add	*20.53*	
26 05 36 00-1339	EA	24" Horizontal 45 Degree Elbow, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	511.30	200.45
		For 60 Degree Bend, Deduct	*-91.88*	
		For 30 Degree Bend, Deduct	*-164.27*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-34.42*	
		For 6" Overall Height Instead Of 4-5/8", Add	*25.57*	
26 05 36 00-1340	EA	30" Horizontal 45 Degree Elbow, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	580.13	235.30
		For 60 Degree Bend, Deduct	*-101.23*	
		For 30 Degree Bend, Deduct	*-181.80*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-38.40*	
		For 6" Overall Height Instead Of 4-5/8", Add	*29.01*	
26 05 36 00-1341	EA	36" Horizontal 45 Degree Elbow, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	681.47	284.82
		For 60 Degree Bend, Deduct	*-115.69*	
		For 30 Degree Bend, Deduct	*-208.65*	
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-44.41*	
		For 6" Overall Height Instead Of 4-5/8", Add	*34.07*	

copyright 2026 The Gordian Group, Inc.

CSI	MINOR UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1342		**90 Degree, 12" Radius Vertical Risers** *(26 05 36 00-1293)*		
26 05 36 00-1343	EA	6" Vertical Riser 90 Degree, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	330.89	112.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-23.69*	
		For 6" Overall Height Instead Of 4-5/8", Add	*16.54*	
26 05 36 00-1344	EA	9" Vertical Riser 90 Degree, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	365.46	128.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-25.81*	
		For 6" Overall Height Instead Of 4-5/8", Add	*18.27*	
26 05 36 00-1345	EA	12" Vertical Riser 90 Degree, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	390.65	142.47
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-27.20*	
		For 6" Overall Height Instead Of 4-5/8", Add	*19.53*	
26 05 36 00-1346	EA	18" Vertical Riser 90 Degree, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	449.50	174.62
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-30.40*	
		For 6" Overall Height Instead Of 4-5/8", Add	*22.48*	
26 05 36 00-1347	EA	24" Vertical Riser 90 Degree, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	500.39	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-33.33*	
		For 6" Overall Height Instead Of 4-5/8", Add	*25.02*	
26 05 36 00-1348	EA	30" Vertical Riser 90 Degree, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	550.07	225.60
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-36.21*	
		For 6" Overall Height Instead Of 4-5/8", Add	*27.50*	
26 05 36 00-1349	EA	36" Vertical Riser 90 Degree, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	608.48	257.52
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.39*	
		For 6" Overall Height Instead Of 4-5/8", Add	*30.42*	
26 05 36 00-1350		**90 Degree, 24" Radius Vertical Risers** *(26 05 36 00-1293)*		
26 05 36 00-1351	EA	6" Vertical Riser 90 Degree, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	350.69	117.65
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-25.26*	
		For 6" Overall Height Instead Of 4-5/8", Add	*17.53*	
26 05 36 00-1352	EA	9" Vertical Riser 90 Degree, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	386.68	135.36
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-27.39*	
		For 6" Overall Height Instead Of 4-5/8", Add	*19.33*	
26 05 36 00-1353	EA	12" Vertical Riser 90 Degree, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	415.64	150.37
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-29.03*	
		For 6" Overall Height Instead Of 4-5/8", Add	*20.78*	
26 05 36 00-1354	EA	18" Vertical Riser 90 Degree, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	485.33	186.79
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-32.97*	
		For 6" Overall Height Instead Of 4-5/8", Add	*24.27*	
26 05 36 00-1355	EA	24" Vertical Riser 90 Degree, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	545.54	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-36.50*	
		For 6" Overall Height Instead Of 4-5/8", Add	*27.28*	
26 05 36 00-1356	EA	30" Vertical Riser 90 Degree, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	604.74	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.98*	
		For 6" Overall Height Instead Of 4-5/8", Add	*30.24*	
26 05 36 00-1357	EA	36" Vertical Riser 90 Degree, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	682.59	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-44.52*	
		For 6" Overall Height Instead Of 4-5/8", Add	*34.13*	
26 05 36 00-1358		**90 Degree, 36" Radius Vertical Risers** *(26 05 36 00-1293)*		
26 05 36 00-1359	EA	6" Vertical Riser 90 Degree, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	443.97	122.95
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-34.15*	
		For 6" Overall Height Instead Of 4-5/8", Add	*22.20*	
26 05 36 00-1360	EA	9" Vertical Riser 90 Degree, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	481.58	142.47
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-36.29*	
		For 6" Overall Height Instead Of 4-5/8", Add	*24.08*	
26 05 36 00-1361	EA	12" Vertical Riser 90 Degree, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	525.34	159.28
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-39.26*	
		For 6" Overall Height Instead Of 4-5/8", Add	*26.27*	
26 05 36 00-1362	EA	18" Vertical Riser 90 Degree, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	604.31	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-43.73*	
		For 6" Overall Height Instead Of 4-5/8", Add	*30.22*	
26 05 36 00-1363	EA	24" Vertical Riser 90 Degree, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	672.80	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-47.67*	
		For 6" Overall Height Instead Of 4-5/8", Add	*33.64*	
26 05 36 00-1364	EA	30" Vertical Riser 90 Degree, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	752.57	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-52.70*	
		For 6" Overall Height Instead Of 4-5/8", Add	*37.63*	
26 05 36 00-1365	EA	36" Vertical Riser 90 Degree, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	844.44	318.10
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-57.94*	
		For 6" Overall Height Instead Of 4-5/8", Add	*42.22*	
26 05 36 00-1366		**12" Radius Horizontal Tees** *(26 05 36 00-1293)*		
26 05 36 00-1367	EA	6" Horizontal Tee, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	519.56	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-33.90*	
		For 6" Overall Height Instead Of 4-5/8", Add	*25.98*	
26 05 36 00-1368	EA	9" Horizontal Tee, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	561.08	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-36.50*	
		For 6" Overall Height Instead Of 4-5/8", Add	*28.05*	
26 05 36 00-1369	EA	12" Horizontal Tee, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	581.36	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-37.64*	
		For 6" Overall Height Instead Of 4-5/8", Add	*29.07*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1370	EA	18" Horizontal Tee, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	656.44	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-43.08*	
		For 6" Overall Height Instead Of 4-5/8", Add	*32.82*	
26 05 36 00-1371	EA	24" Horizontal Tee, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	726.92	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-47.65*	
		For 6" Overall Height Instead Of 4-5/8", Add	*36.35*	
26 05 36 00-1372	EA	30" Horizontal Tee, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	793.47	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-52.79*	
		For 6" Overall Height Instead Of 4-5/8", Add	*39.67*	
26 05 36 00-1373	EA	36" Horizontal Tee, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	915.64	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-61.50*	
		For 6" Overall Height Instead Of 4-5/8", Add	*45.78*	

26 05 36 00-1374 24" Radius Horizontal Tees *(26 05 36 00-1293)*

26 05 36 00-1375	EA	6" Horizontal Tee, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	662.40	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-46.63*	
		For 6" Overall Height Instead Of 4-5/8", Add	*33.12*	
26 05 36 00-1376	EA	9" Horizontal Tee, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	715.66	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-50.07*	
		For 6" Overall Height Instead Of 4-5/8", Add	*35.78*	
26 05 36 00-1377	EA	12" Horizontal Tee, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	744.78	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-51.92*	
		For 6" Overall Height Instead Of 4-5/8", Add	*37.24*	
26 05 36 00-1378	EA	18" Horizontal Tee, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	820.45	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-57.00*	
		For 6" Overall Height Instead Of 4-5/8", Add	*41.02*	
26 05 36 00-1379	EA	24" Horizontal Tee, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	912.13	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-63.01*	
		For 6" Overall Height Instead Of 4-5/8", Add	*45.61*	
26 05 36 00-1380	EA	30" Horizontal Tee, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	983.19	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-68.26*	
		For 6" Overall Height Instead Of 4-5/8", Add	*49.16*	
26 05 36 00-1381	EA	36" Horizontal Tee, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,279.13	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-93.18*	
		For 6" Overall Height Instead Of 4-5/8", Add	*63.96*	

26 05 36 00-1382 36" Radius Horizontal Tees *(26 05 36 00-1293)*

26 05 36 00-1383	EA	6" Horizontal Tee, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	811.79	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-59.69*	
		For 6" Overall Height Instead Of 4-5/8", Add	*40.59*	
26 05 36 00-1384	EA	9" Horizontal Tee, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	867.05	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-62.97*	
		For 6" Overall Height Instead Of 4-5/8", Add	*43.35*	
26 05 36 00-1385	EA	12" Horizontal Tee, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	929.56	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-67.91*	
		For 6" Overall Height Instead Of 4-5/8", Add	*46.48*	
26 05 36 00-1386	EA	18" Horizontal Tee, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,016.05	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-73.41*	
		For 6" Overall Height Instead Of 4-5/8", Add	*50.80*	
26 05 36 00-1387	EA	24" Horizontal Tee, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,142.66	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-82.07*	
		For 6" Overall Height Instead Of 4-5/8", Add	*57.13*	
26 05 36 00-1388	EA	30" Horizontal Tee, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,325.90	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-97.86*	
		For 6" Overall Height Instead Of 4-5/8", Add	*66.30*	
26 05 36 00-1389	EA	36" Horizontal Tee, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,521.23	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-111.13*	
		For 6" Overall Height Instead Of 4-5/8", Add	*76.06*	

26 05 36 00-1390 12" Radius Vertical Tees *(26 05 36 00-1293)*

26 05 36 00-1391	EA	6" Vertical Tee, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	690.05	200.45
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-52.30*	
		For 6" Overall Height Instead Of 4-5/8", Add	*34.50*	
26 05 36 00-1392	EA	9" Vertical Tee, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	713.62	208.35
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-54.00*	
		For 6" Overall Height Instead Of 4-5/8", Add	*35.68*	
26 05 36 00-1393	EA	12" Vertical Tee, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	730.00	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-54.95*	
		For 6" Overall Height Instead Of 4-5/8", Add	*36.50*	
26 05 36 00-1394	EA	18" Vertical Tee, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	768.92	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-57.28*	
		For 6" Overall Height Instead Of 4-5/8", Add	*38.45*	
26 05 36 00-1395	EA	24" Vertical Tee, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	817.78	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-61.28*	
		For 6" Overall Height Instead Of 4-5/8", Add	*40.89*	
26 05 36 00-1396	EA	30" Vertical Tee, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	866.88	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-64.13*	
		For 6" Overall Height Instead Of 4-5/8", Add	*43.34*	
26 05 36 00-1397	EA	36" Vertical Tee, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	929.56	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-67.91*	
		For 6" Overall Height Instead Of 4-5/8", Add	*46.48*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1398		**24" Radius Vertical Tees** *(26 05 36 00-1293)*			
26 05 36 00-1399	EA	6" Vertical Tee, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray		963.82	216.69
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct		*-78.33*	
		For 6" Overall Height Instead Of 4-5/8", Add		*48.19*	
26 05 36 00-1400	EA	9" Vertical Tee, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray		986.53	225.60
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct		*-79.85*	
		For 6" Overall Height Instead Of 4-5/8", Add		*49.33*	
26 05 36 00-1401	EA	12" Vertical Tee, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray		1,010.54	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct		*-81.44*	
		For 6" Overall Height Instead Of 4-5/8", Add		*50.53*	
26 05 36 00-1402	EA	18" Vertical Tee, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray		1,066.39	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct		*-85.15*	
		For 6" Overall Height Instead Of 4-5/8", Add		*53.32*	
26 05 36 00-1403	EA	24" Vertical Tee, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray		1,103.30	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct		*-87.77*	
		For 6" Overall Height Instead Of 4-5/8", Add		*55.17*	
26 05 36 00-1404	EA	30" Vertical Tee, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray		1,168.58	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct		*-91.81*	
		For 6" Overall Height Instead Of 4-5/8", Add		*58.43*	
26 05 36 00-1405	EA	36" Vertical Tee, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray		1,291.44	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct		*-100.94*	
		For 6" Overall Height Instead Of 4-5/8", Add		*64.57*	
26 05 36 00-1406		**36" Radius Vertical Tees** *(26 05 36 00-1293)*			
26 05 36 00-1407	EA	6" Vertical Tee, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray		1,538.84	235.30
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct		*-134.27*	
		For 6" Overall Height Instead Of 4-5/8", Add		*76.94*	
26 05 36 00-1408	EA	9" Vertical Tee, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray		1,571.41	245.90
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct		*-136.65*	
		For 6" Overall Height Instead Of 4-5/8", Add		*78.57*	
26 05 36 00-1409	EA	12" Vertical Tee, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray		1,606.29	257.97
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct		*-139.14*	
		For 6" Overall Height Instead Of 4-5/8", Add		*80.31*	
26 05 36 00-1410	EA	18" Vertical Tee, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray		1,666.07	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct		*-142.87*	
		For 6" Overall Height Instead Of 4-5/8", Add		*83.30*	
26 05 36 00-1411	EA	24" Vertical Tee, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray		1,707.10	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct		*-145.67*	
		For 6" Overall Height Instead Of 4-5/8", Add		*85.36*	
26 05 36 00-1412	EA	30" Vertical Tee, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray		1,814.87	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct		*-153.29*	
		For 6" Overall Height Instead Of 4-5/8", Add		*90.74*	
26 05 36 00-1413	EA	36" Vertical Tee, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray		1,909.59	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct		*-158.77*	
		For 6" Overall Height Instead Of 4-5/8", Add		*95.48*	
26 05 36 00-1414		**12" Radius Horizontal Crosses** *(26 05 36 00-1293)*			
26 05 36 00-1415	EA	6" Horizontal Cross, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray		672.03	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct		*-44.64*	
		For 6" Overall Height Instead Of 4-5/8", Add		*33.60*	
26 05 36 00-1416	EA	9" Horizontal Cross, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray		718.96	284.82
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct		*-48.16*	
		For 6" Overall Height Instead Of 4-5/8", Add		*35.95*	
26 05 36 00-1417	EA	12" Horizontal Cross, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray		747.70	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct		*-49.73*	
		For 6" Overall Height Instead Of 4-5/8", Add		*37.39*	
26 05 36 00-1418	EA	18" Horizontal Cross, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray		829.84	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct		*-56.43*	
		For 6" Overall Height Instead Of 4-5/8", Add		*41.49*	
26 05 36 00-1419	EA	24" Horizontal Cross, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray		910.44	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct		*-60.98*	
		For 6" Overall Height Instead Of 4-5/8", Add		*45.52*	
26 05 36 00-1420	EA	30" Horizontal Cross, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray		1,007.56	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct		*-68.56*	
		For 6" Overall Height Instead Of 4-5/8", Add		*50.38*	
26 05 36 00-1421	EA	36" Horizontal Cross, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray		1,149.23	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct		*-80.19*	
		For 6" Overall Height Instead Of 4-5/8", Add		*57.46*	
26 05 36 00-1422		**24" Radius Horizontal Crosses** *(26 05 36 00-1293)*			
26 05 36 00-1423	EA	6" Horizontal Cross, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray		924.37	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct		*-67.39*	
		For 6" Overall Height Instead Of 4-5/8", Add		*46.22*	
26 05 36 00-1424	EA	9" Horizontal Cross, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray		967.54	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct		*-70.20*	
		For 6" Overall Height Instead Of 4-5/8", Add		*48.38*	
26 05 36 00-1425	EA	12" Horizontal Cross, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray		1,013.46	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct		*-73.15*	
		For 6" Overall Height Instead Of 4-5/8", Add		*50.67*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1426	EA	18" Horizontal Cross, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,074.12	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-77.35*	
		For 6" Overall Height Instead Of 4-5/8", Add	*53.71*	
26 05 36 00-1427	EA	24" Horizontal Cross, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,208.99	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-86.17*	
		For 6" Overall Height Instead Of 4-5/8", Add	*60.45*	
26 05 36 00-1428	EA	30" Horizontal Cross, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,302.78	451.20
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-92.68*	
		For 6" Overall Height Instead Of 4-5/8", Add	*65.14*	
26 05 36 00-1429	EA	36" Horizontal Cross, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,440.70	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-103.08*	
		For 6" Overall Height Instead Of 4-5/8", Add	*72.04*	

26 05 36 00-1430 36" Radius Horizontal Crosses *(26 05 36 00-1293)*

26 05 36 00-1431	EA	6" Horizontal Cross, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,062.82	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-78.08*	
		For 6" Overall Height Instead Of 4-5/8", Add	*53.14*	
26 05 36 00-1432	EA	9" Horizontal Cross, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,120.88	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-82.02*	
		For 6" Overall Height Instead Of 4-5/8", Add	*56.04*	
26 05 36 00-1433	EA	12" Horizontal Cross, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,194.62	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-87.27*	
		For 6" Overall Height Instead Of 4-5/8", Add	*59.73*	
26 05 36 00-1434	EA	18" Horizontal Cross, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,281.73	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-93.44*	
		For 6" Overall Height Instead Of 4-5/8", Add	*64.09*	
26 05 36 00-1435	EA	24" Horizontal Cross, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,547.21	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-113.73*	
		For 6" Overall Height Instead Of 4-5/8", Add	*77.36*	
26 05 36 00-1436	EA	30" Horizontal Cross, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,706.35	540.54
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-125.59*	
		For 6" Overall Height Instead Of 4-5/8", Add	*85.32*	
26 05 36 00-1437	EA	36" Horizontal Cross, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,899.89	602.13
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-139.81*	
		For 6" Overall Height Instead Of 4-5/8", Add	*94.99*	

26 05 36 00-1438 12" Radius Vertical Crosses *(26 05 36 00-1293)*

26 05 36 00-1439	EA	6" Vertical Cross, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	672.03	270.72
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-44.64*	
		For 6" Overall Height Instead Of 4-5/8", Add	*33.60*	
26 05 36 00-1440	EA	9" Vertical Cross, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	719.12	284.94
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-48.17*	
		For 6" Overall Height Instead Of 4-5/8", Add	*35.96*	
26 05 36 00-1441	EA	12" Vertical Cross, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	747.61	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-49.72*	
		For 6" Overall Height Instead Of 4-5/8", Add	*37.38*	
26 05 36 00-1442	EA	18" Vertical Cross, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	830.04	318.78
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-56.44*	
		For 6" Overall Height Instead Of 4-5/8", Add	*41.50*	
26 05 36 00-1443	EA	24" Vertical Cross, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	910.44	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-60.98*	
		For 6" Overall Height Instead Of 4-5/8", Add	*45.52*	
26 05 36 00-1444	EA	30" Vertical Cross, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	1,007.85	386.46
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-68.58*	
		For 6" Overall Height Instead Of 4-5/8", Add	*50.39*	
26 05 36 00-1445	EA	36" Vertical Cross, 12" Rung Spacing, 12" Radius, Aluminum Cable Tray	1,148.38	416.23
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-80.15*	
		For 6" Overall Height Instead Of 4-5/8", Add	*57.42*	

26 05 36 00-1446 24" Radius Vertical Crosses *(26 05 36 00-1293)*

26 05 36 00-1447	EA	6" Vertical Cross, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	924.37	300.50
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-67.39*	
		For 6" Overall Height Instead Of 4-5/8", Add	*46.22*	
26 05 36 00-1448	EA	9" Vertical Cross, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	967.54	318.66
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-70.20*	
		For 6" Overall Height Instead Of 4-5/8", Add	*48.38*	
26 05 36 00-1449	EA	12" Vertical Cross, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,013.46	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-73.15*	
		For 6" Overall Height Instead Of 4-5/8", Add	*50.67*	
26 05 36 00-1450	EA	18" Vertical Cross, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,074.12	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-77.35*	
		For 6" Overall Height Instead Of 4-5/8", Add	*53.71*	
26 05 36 00-1451	EA	24" Vertical Cross, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,208.99	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-86.17*	
		For 6" Overall Height Instead Of 4-5/8", Add	*60.45*	
26 05 36 00-1452	EA	30" Vertical Cross, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,302.78	451.20
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-92.68*	
		For 6" Overall Height Instead Of 4-5/8", Add	*65.14*	
26 05 36 00-1453	EA	36" Vertical Cross, 12" Rung Spacing, 24" Radius, Aluminum Cable Tray	1,440.70	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-103.08*	
		For 6" Overall Height Instead Of 4-5/8", Add	*72.04*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1454		**36" Radius Vertical Crosses** *(26 05 36 00-1293)*		
26 05 36 00-1455	EA	6" Vertical Cross, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,287.29	338.40
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-100.53*	
		For 6" Overall Height Instead Of 4-5/8", Add	*64.36*	
26 05 36 00-1456	EA	9" Vertical Cross, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,354.70	360.74
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-105.41*	
		For 6" Overall Height Instead Of 4-5/8", Add	*67.74*	
26 05 36 00-1457	EA	12" Vertical Cross, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,442.47	386.34
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-112.06*	
		For 6" Overall Height Instead Of 4-5/8", Add	*72.12*	
26 05 36 00-1458	EA	18" Vertical Cross, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,545.95	416.80
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-119.87*	
		For 6" Overall Height Instead Of 4-5/8", Add	*77.30*	
26 05 36 00-1459	EA	24" Vertical Cross, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	1,874.56	491.81
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-146.47*	
		For 6" Overall Height Instead Of 4-5/8", Add	*93.73*	
26 05 36 00-1460	EA	30" Vertical Cross, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	2,068.77	540.54
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-161.83*	
		For 6" Overall Height Instead Of 4-5/8", Add	*103.44*	
26 05 36 00-1461	EA	36" Vertical Cross, 12" Rung Spacing, 36" Radius, Aluminum Cable Tray	2,303.23	602.13
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-180.14*	
		For 6" Overall Height Instead Of 4-5/8", Add	*115.16*	
26 05 36 00-1462		**Dropout Or End Plates And Reducers** *(26 05 36 00-0744)*		
26 05 36 00-1463		**Straight Reducers** *(26 05 36 00-1462)*		
26 05 36 00-1464	EA	9" To 6" Reducer, Aluminum Cable Tray	268.68	83.25
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-19.93*	
		For 6" Overall Height Instead Of 4-5/8", Add	*13.43*	
26 05 36 00-1465	EA	12" To 9" Reducer, Aluminum Cable Tray	283.03	90.12
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-20.79*	
		For 6" Overall Height Instead Of 4-5/8", Add	*14.15*	
26 05 36 00-1466	EA	18" To 12" Reducer, Aluminum Cable Tray	309.10	104.00
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-22.24*	
		For 6" Overall Height Instead Of 4-5/8", Add	*15.46*	
26 05 36 00-1467	EA	24" To 18" Reducer, Aluminum Cable Tray	339.13	120.36
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-23.88*	
		For 6" Overall Height Instead Of 4-5/8", Add	*16.96*	
26 05 36 00-1468	EA	30" To 24" Reducer, Aluminum Cable Tray	367.05	135.36
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-25.43*	
		For 6" Overall Height Instead Of 4-5/8", Add	*18.35*	
26 05 36 00-1469	EA	36" To 30" Reducer, Aluminum Cable Tray	407.88	154.65
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-27.90*	
		For 6" Overall Height Instead Of 4-5/8", Add	*20.39*	
26 05 36 00-1470		**Reducers** *(26 05 36 00-1462)*		
26 05 36 00-1471	EA	18" To 6" Reducer, Aluminum Cable Tray	309.21	104.12
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-22.24*	
		For 6" Overall Height Instead Of 4-5/8", Add	*15.46*	
26 05 36 00-1472	EA	24" To 12" Reducer, Aluminum Cable Tray	339.42	120.47
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-23.90*	
		For 6" Overall Height Instead Of 4-5/8", Add	*16.97*	
26 05 36 00-1473	EA	30" To 12" Reducer, Aluminum Cable Tray	366.87	135.25
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-25.42*	
		For 6" Overall Height Instead Of 4-5/8", Add	*18.34*	
26 05 36 00-1474	EA	30" To 18" Reducer, Aluminum Cable Tray	369.57	135.13
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-25.70*	
		For 6" Overall Height Instead Of 4-5/8", Add	*18.48*	
26 05 36 00-1475	EA	36" To 12" Reducer, Aluminum Cable Tray	404.99	154.65
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-27.61*	
		For 6" Overall Height Instead Of 4-5/8", Add	*20.25*	
26 05 36 00-1476	EA	36" To 18" Reducer, Aluminum Cable Tray	414.65	158.71
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-28.24*	
		For 6" Overall Height Instead Of 4-5/8", Add	*20.73*	
26 05 36 00-1477	EA	36" To 24" Reducer, Aluminum Cable Tray	428.87	163.79
		For 3-5/8" Overall Height Instead Of 4-5/8", Deduct	*-29.24*	
		For 6" Overall Height Instead Of 4-5/8", Add	*21.44*	
26 05 36 00-1478		**Dropout Or End Plate** *(26 05 36 00-1462)*		
26 05 36 00-1479	EA	6" Dropout Or End Plate, Aluminum Cable Tray	73.58	33.84
26 05 36 00-1480	EA	9" Dropout Or End Plate, Aluminum Cable Tray	82.74	38.69
26 05 36 00-1481	EA	12" Dropout Or End Plate, Aluminum Cable Tray	89.29	41.62
26 05 36 00-1482	EA	18" Dropout Or End Plate, Aluminum Cable Tray	108.71	49.18
26 05 36 00-1483	EA	24" Dropout Or End Plate, Aluminum Cable Tray	121.56	54.15
26 05 36 00-1484	EA	30" Dropout Or End Plate, Aluminum Cable Tray	137.53	60.12
26 05 36 00-1485	EA	36" Dropout Or End Plate, Aluminum Cable Tray	154.22	67.68

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1486		**Solid Bottom Cable Tray** *(26 05 36 00-0001)* Note: 3-5/8" Height.		
26 05 36 00-1487		**Solid Bottom Galvanized Steel Straight Tray Sections** *(26 05 36 00-1486)*		
26 05 36 00-1488	LF	6" Solid Bottom Steel Cable Tray, Straight Section	31.88	8.80
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*3.31*	
26 05 36 00-1489	LF	12" Solid Bottom Steel Cable Tray, Straight Section	39.80	10.83
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*4.17*	
26 05 36 00-1490	LF	18" Solid Bottom Steel Cable Tray, Straight Section	52.69	15.57
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*5.31*	
26 05 36 00-1491	LF	24" Solid Bottom Steel Cable Tray, Straight Section	61.02	17.82
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*6.18*	
26 05 36 00-1492	LF	30" Solid Bottom Steel Cable Tray, Straight Section	73.06	21.54
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*7.36*	
26 05 36 00-1493	LF	36" Solid Bottom Steel Cable Tray, Straight Section	94.31	24.70
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*10.03*	
26 05 36 00-1494		**Solid Bottom Galvanized Steel Cable Tray Fittings** *(26 05 36 00-1486)*		
26 05 36 00-1495		**90 Degree, 12" Radius Horizontal Elbows** *(26 05 36 00-1494)*		
26 05 36 00-1496	EA	6" Horizontal 90 Degree Elbow, Solid Bottom, 12" Radius, Steel Cable Tray	317.82	112.91
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*28.86*	
26 05 36 00-1497	EA	12" Horizontal 90 Degree Elbow, Solid Bottom, 12" Radius, Steel Cable Tray	410.05	158.83
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*35.03*	
26 05 36 00-1498	EA	18" Horizontal 90 Degree Elbow, Solid Bottom, 12" Radius, Steel Cable Tray	500.13	200.45
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*41.61*	
26 05 36 00-1499	EA	24" Horizontal 90 Degree Elbow, Solid Bottom, 12" Radius, Steel Cable Tray	612.81	246.25
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*50.87*	
26 05 36 00-1500	EA	30" Horizontal 90 Degree Elbow, Solid Bottom, 12" Radius, Steel Cable Tray	716.78	285.39
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*59.96*	
26 05 36 00-1501	EA	36" Horizontal 90 Degree Elbow, Solid Bottom, 12" Radius, Steel Cable Tray	806.02	318.66
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*67.80*	
26 05 36 00-1502		**90 Degree, 24" Radius Horizontal Elbows** *(26 05 36 00-1494)*		
26 05 36 00-1503	EA	6" Horizontal 90 Degree Elbow, Solid Bottom, 24" Radius, Steel Cable Tray	380.13	117.54
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*37.42*	
26 05 36 00-1504	EA	12" Horizontal 90 Degree Elbow, Solid Bottom, 24" Radius, Steel Cable Tray	497.57	169.31
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*46.41*	
26 05 36 00-1505	EA	18" Horizontal 90 Degree Elbow, Solid Bottom, 24" Radius, Steel Cable Tray	610.09	216.69
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*55.41*	
26 05 36 00-1506	EA	24" Horizontal 90 Degree Elbow, Solid Bottom, 24" Radius, Steel Cable Tray	741.71	270.72
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*66.14*	
26 05 36 00-1507	EA	30" Horizontal 90 Degree Elbow, Solid Bottom, 24" Radius, Steel Cable Tray	869.88	318.10
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*77.47*	
26 05 36 00-1508	EA	36" Horizontal 90 Degree Elbow, Solid Bottom, 24" Radius, Steel Cable Tray	982.58	360.74
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*87.26*	
26 05 36 00-1509		**90 Degree, 36" Radius Horizontal Elbows** *(26 05 36 00-1494)*		
26 05 36 00-1510	EA	6" Horizontal 90 Degree Elbow, Solid Bottom, 36" Radius, Steel Cable Tray	474.41	122.84
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*50.70*	
26 05 36 00-1511	EA	12" Horizontal 90 Degree Elbow, Solid Bottom, 36" Radius, Steel Cable Tray	604.77	180.82
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*60.59*	
26 05 36 00-1512	EA	18" Horizontal 90 Degree Elbow, Solid Bottom, 36" Radius, Steel Cable Tray	763.68	235.64
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*75.28*	
26 05 36 00-1513	EA	24" Horizontal 90 Degree Elbow, Solid Bottom, 36" Radius, Steel Cable Tray	902.94	300.50
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*85.35*	
26 05 36 00-1514	EA	30" Horizontal 90 Degree Elbow, Solid Bottom, 36" Radius, Steel Cable Tray	1,083.74	360.74
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*102.43*	
26 05 36 00-1515	EA	36" Horizontal 90 Degree Elbow, Solid Bottom, 36" Radius, Steel Cable Tray	1,235.00	415.67
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*115.96*	
26 05 36 00-1516		**45 Degree, 12" Radius Horizontal Elbows** *(26 05 36 00-1494)*		
26 05 36 00-1517	EA	6" Horizontal 45 Degree Elbow, Solid Bottom, 12" Radius, Steel Cable Tray	285.52	112.91
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*24.00*	
26 05 36 00-1518	EA	12" Horizontal 45 Degree Elbow, Solid Bottom, 12" Radius, Steel Cable Tray	373.73	158.83
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*29.58*	
26 05 36 00-1519	EA	18" Horizontal 45 Degree Elbow, Solid Bottom, 12" Radius, Steel Cable Tray	458.24	200.22
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*35.36*	
26 05 36 00-1520	EA	24" Horizontal 45 Degree Elbow, Solid Bottom, 12" Radius, Steel Cable Tray	561.63	245.90
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*43.26*	
26 05 36 00-1521	EA	30" Horizontal 45 Degree Elbow, Solid Bottom, 12" Radius, Steel Cable Tray	656.47	285.39
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*50.92*	
26 05 36 00-1522	EA	36" Horizontal 45 Degree Elbow, Solid Bottom, 12" Radius, Steel Cable Tray	736.29	318.10
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*57.44*	
26 05 36 00-1523		**45 Degree, 24" Radius Horizontal Elbows** *(26 05 36 00-1494)*		
26 05 36 00-1524	EA	6" Horizontal 45 Degree Elbow, Solid Bottom, 24" Radius, Steel Cable Tray	334.23	117.65
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*30.52*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1525	EA	12" Horizontal 45 Degree Elbow, Solid Bottom, 24" Radius, Steel Cable Tray	443.47	169.20
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*38.32*	
26 05 36 00-1526	EA	18" Horizontal 45 Degree Elbow, Solid Bottom, 24" Radius, Steel Cable Tray	548.30	216.92
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*46.09*	
26 05 36 00-1527	EA	24" Horizontal 45 Degree Elbow, Solid Bottom, 24" Radius, Steel Cable Tray	669.08	270.72
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*55.24*	
26 05 36 00-1528	EA	30" Horizontal 45 Degree Elbow, Solid Bottom, 24" Radius, Steel Cable Tray	785.92	318.66
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*64.78*	
26 05 36 00-1529	EA	36" Horizontal 45 Degree Elbow, Solid Bottom, 24" Radius, Steel Cable Tray	887.25	360.74
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*72.96*	

26 05 36 00-1530 45 Degree, 36" Radius Horizontal Elbows *(26 05 36 00-1494)*

26 05 36 00-1531	EA	6" Horizontal 45 Degree Elbow, Solid Bottom, 36" Radius, Steel Cable Tray	407.27	122.95
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*40.60*	
26 05 36 00-1532	EA	12" Horizontal 45 Degree Elbow, Solid Bottom, 36" Radius, Steel Cable Tray	500.87	163.90
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*47.80*	
26 05 36 00-1533	EA	18" Horizontal 45 Degree Elbow, Solid Bottom, 36" Radius, Steel Cable Tray	670.95	235.64
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*61.37*	
26 05 36 00-1534	EA	24" Horizontal 45 Degree Elbow, Solid Bottom, 36" Radius, Steel Cable Tray	803.32	301.07
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*70.32*	
26 05 36 00-1535	EA	30" Horizontal 45 Degree Elbow, Solid Bottom, 36" Radius, Steel Cable Tray	963.12	360.74
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*84.34*	
26 05 36 00-1536	EA	36" Horizontal 45 Degree Elbow, Solid Bottom, 36" Radius, Steel Cable Tray	1,101.17	416.80
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*95.72*	

26 05 36 00-1537 90 Degree, 12" Radius Vertical Risers *(26 05 36 00-1494)*

26 05 36 00-1538	EA	6" Vertical Riser 90 Degree, Solid Bottom, 12" Radius, Steel Cable Tray	345.86	112.58
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*33.12*	
26 05 36 00-1539	EA	12" Vertical Riser 90 Degree, Solid Bottom, 12" Radius, Steel Cable Tray	430.80	158.83
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*38.14*	
26 05 36 00-1540	EA	18" Vertical Riser 90 Degree, Solid Bottom, 12" Radius, Steel Cable Tray	502.72	200.45
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*42.00*	
26 05 36 00-1541	EA	24" Vertical Riser 90 Degree, Solid Bottom, 12" Radius, Steel Cable Tray	607.62	246.25
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*50.09*	
26 05 36 00-1542	EA	30" Vertical Riser 90 Degree, Solid Bottom, 12" Radius, Steel Cable Tray	685.65	285.39
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*55.29*	
26 05 36 00-1543	EA	36" Vertical Riser 90 Degree, Solid Bottom, 12" Radius, Steel Cable Tray	747.96	318.10
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*59.19*	

26 05 36 00-1544 90 Degree, 24" Radius Vertical Risers *(26 05 36 00-1494)*

26 05 36 00-1545	EA	6" Vertical Riser 90 Degree, Solid Bottom, 24" Radius, Steel Cable Tray	419.04	117.54
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*43.26*	
26 05 36 00-1546	EA	12" Vertical Riser 90 Degree, Solid Bottom, 24" Radius, Steel Cable Tray	526.10	169.31
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*50.69*	
26 05 36 00-1547	EA	18" Vertical Riser 90 Degree, Solid Bottom, 24" Radius, Steel Cable Tray	625.65	216.69
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*57.74*	
26 05 36 00-1548	EA	24" Vertical Riser 90 Degree, Solid Bottom, 24" Radius, Steel Cable Tray	739.12	270.72
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*65.75*	
26 05 36 00-1549	EA	30" Vertical Riser 90 Degree, Solid Bottom, 24" Radius, Steel Cable Tray	833.56	318.10
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*72.03*	
26 05 36 00-1550	EA	36" Vertical Riser 90 Degree, Solid Bottom, 24" Radius, Steel Cable Tray	933.29	360.74
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*79.87*	

26 05 36 00-1551 90 Degree, 36" Radius Vertical Risers *(26 05 36 00-1494)*

26 05 36 00-1552	EA	6" Vertical Riser 90 Degree, Solid Bottom, 36" Radius, Steel Cable Tray	508.13	122.84
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*55.75*	
26 05 36 00-1553	EA	12" Vertical Riser 90 Degree, Solid Bottom, 36" Radius, Steel Cable Tray	613.59	164.24
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*64.66*	
26 05 36 00-1554	EA	18" Vertical Riser 90 Degree, Solid Bottom, 36" Radius, Steel Cable Tray	763.68	235.64
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*75.28*	
26 05 36 00-1555	EA	24" Vertical Riser 90 Degree, Solid Bottom, 36" Radius, Steel Cable Tray	908.13	300.50
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*86.13*	
26 05 36 00-1556	EA	30" Vertical Riser 90 Degree, Solid Bottom, 36" Radius, Steel Cable Tray	1,044.83	360.74
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*96.60*	
26 05 36 00-1557	EA	36" Vertical Riser 90 Degree, Solid Bottom, 36" Radius, Steel Cable Tray	1,175.34	415.67
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*107.01*	

26 05 36 00-1558 12" Radius Horizontal Tees *(26 05 36 00-1494)*

26 05 36 00-1559	EA	6" Horizontal Tee, Solid Bottom, 12" Radius, Steel Cable Tray	542.65	216.69
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*45.29*	
26 05 36 00-1560	EA	12" Horizontal Tee, Solid Bottom, 12" Radius, Steel Cable Tray	647.61	270.27
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*52.09*	
26 05 36 00-1561	EA	18" Horizontal Tee, Solid Bottom, 12" Radius, Steel Cable Tray	764.52	318.66
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*61.57*	
26 05 36 00-1562	EA	24" Horizontal Tee, Solid Bottom, 12" Radius, Steel Cable Tray	907.30	387.13
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*71.56*	
26 05 36 00-1563	EA	30" Horizontal Tee, Solid Bottom, 12" Radius, Steel Cable Tray	992.87	416.80
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*79.47*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1564	EA	36" Horizontal Tee, Solid Bottom, 12" Radius, Steel Cable Tray	1,162.16	491.81
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*92.35*	
26 05 36 00-1565		**24" Radius Horizontal Tees** *(26 05 36 00-1494)*		
26 05 36 00-1566	EA	6" Horizontal Tee, Solid Bottom, 24" Radius, Steel Cable Tray	674.94	235.30
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*62.02*	
26 05 36 00-1567	EA	12" Horizontal Tee, Solid Bottom, 24" Radius, Steel Cable Tray	830.31	300.50
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*74.46*	
26 05 36 00-1568	EA	18" Horizontal Tee, Solid Bottom, 24" Radius, Steel Cable Tray	967.01	360.74
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*84.92*	
26 05 36 00-1569	EA	24" Horizontal Tee, Solid Bottom, 24" Radius, Steel Cable Tray	1,247.43	451.20
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*111.91*	
26 05 36 00-1570	EA	30" Horizontal Tee, Solid Bottom, 24" Radius, Steel Cable Tray	1,359.29	491.81
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*121.92*	
26 05 36 00-1571	EA	36" Horizontal Tee, Solid Bottom, 24" Radius, Steel Cable Tray	1,587.19	602.13
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*137.72*	
26 05 36 00-1572		**36" Radius Horizontal Tees** *(26 05 36 00-1494)*		
26 05 36 00-1573	EA	6" Horizontal Tee, Solid Bottom, 36" Radius, Steel Cable Tray	873.43	257.97
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*88.03*	
26 05 36 00-1574	EA	12" Horizontal Tee, Solid Bottom, 36" Radius, Steel Cable Tray	1,059.43	338.40
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*102.51*	
26 05 36 00-1575	EA	18" Horizontal Tee, Solid Bottom, 36" Radius, Steel Cable Tray	1,234.10	416.80
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*115.66*	
26 05 36 00-1576	EA	24" Horizontal Tee, Solid Bottom, 36" Radius, Steel Cable Tray	1,512.33	491.81
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*144.87*	
26 05 36 00-1577	EA	30" Horizontal Tee, Solid Bottom, 36" Radius, Steel Cable Tray	1,656.07	542.34
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*158.03*	
26 05 36 00-1578	EA	36" Horizontal Tee, Solid Bottom, 36" Radius, Steel Cable Tray	1,906.16	676.80
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*173.12*	
26 05 36 00-1579		**12" Radius Vertical Tees** *(26 05 36 00-1494)*		
26 05 36 00-1580	EA	6" Vertical Tee, Solid Bottom, 12" Radius, Steel Cable Tray	659.37	216.69
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*62.80*	
26 05 36 00-1581	EA	12" Vertical Tee, Solid Bottom, 12" Radius, Steel Cable Tray	762.46	270.72
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*69.25*	
26 05 36 00-1582	EA	18" Vertical Tee, Solid Bottom, 12" Radius, Steel Cable Tray	817.34	300.50
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*72.51*	
26 05 36 00-1583	EA	24" Vertical Tee, Solid Bottom, 12" Radius, Steel Cable Tray	877.66	318.10
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*78.64*	
26 05 36 00-1584	EA	30" Vertical Tee, Solid Bottom, 12" Radius, Steel Cable Tray	972.20	360.74
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*85.70*	
26 05 36 00-1585	EA	36" Vertical Tee, Solid Bottom, 12" Radius, Steel Cable Tray	1,078.47	416.80
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*92.31*	
26 05 36 00-1586		**24" Radius Vertical Tees** *(26 05 36 00-1494)*		
26 05 36 00-1587	EA	6" Vertical Tee, Solid Bottom, 24" Radius, Steel Cable Tray	833.17	235.30
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*85.75*	
26 05 36 00-1588	EA	12" Vertical Tee, Solid Bottom, 24" Radius, Steel Cable Tray	962.60	300.50
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*94.30*	
26 05 36 00-1589	EA	18" Vertical Tee, Solid Bottom, 24" Radius, Steel Cable Tray	1,049.05	338.40
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*100.96*	
26 05 36 00-1590	EA	24" Vertical Tee, Solid Bottom, 24" Radius, Steel Cable Tray	1,109.68	360.74
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*106.32*	
26 05 36 00-1591	EA	30" Vertical Tee, Solid Bottom, 24" Radius, Steel Cable Tray	1,252.26	416.80
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*118.38*	
26 05 36 00-1592	EA	36" Vertical Tee, Solid Bottom, 24" Radius, Steel Cable Tray	1,403.39	491.81
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*128.53*	
26 05 36 00-1593		**36" Radius Vertical Tees** *(26 05 36 00-1494)*		
26 05 36 00-1594	EA	6" Vertical Tee, Solid Bottom, 36" Radius, Steel Cable Tray	1,116.59	257.52
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*124.57*	
26 05 36 00-1595	EA	12" Vertical Tee, Solid Bottom, 36" Radius, Steel Cable Tray	1,264.34	338.40
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*133.25*	
26 05 36 00-1596	EA	18" Vertical Tee, Solid Bottom, 36" Radius, Steel Cable Tray	1,396.06	386.34
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*145.03*	
26 05 36 00-1597	EA	24" Vertical Tee, Solid Bottom, 36" Radius, Steel Cable Tray	1,472.74	416.80
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*151.45*	
26 05 36 00-1598	EA	30" Vertical Tee, Solid Bottom, 36" Radius, Steel Cable Tray	1,727.62	491.81
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*177.17*	
26 05 36 00-1599	EA	36" Vertical Tee, Solid Bottom, 36" Radius, Steel Cable Tray	1,860.69	540.54
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*189.01*	
26 05 36 00-1600		**12" Radius Horizontal Crosses** *(26 05 36 00-1494)*		
26 05 36 00-1601	EA	6" Horizontal Cross, Solid Bottom, 12" Radius, Steel Cable Tray	669.08	270.72
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*55.24*	

copyright 2026 The Gordian Group, Inc.

	MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1602		EA	12" Horizontal Cross, Solid Bottom, 12" Radius, Steel Cable Tray	767.11	318.66
			For 4-5/8" Overall Height Instead Of 3-5/8", Add	*61.96*	
26 05 36 00-1603		EA	18" Horizontal Cross, Solid Bottom, 12" Radius, Steel Cable Tray	921.38	386.34
			For 4-5/8" Overall Height Instead Of 3-5/8", Add	*73.82*	
26 05 36 00-1604		EA	24" Horizontal Cross, Solid Bottom, 12" Radius, Steel Cable Tray	1,063.26	451.20
			For 4-5/8" Overall Height Instead Of 3-5/8", Add	*84.29*	
26 05 36 00-1605		EA	30" Horizontal Cross, Solid Bottom, 12" Radius, Steel Cable Tray	1,248.54	540.54
			For 4-5/8" Overall Height Instead Of 3-5/8", Add	*97.19*	
26 05 36 00-1606		EA	36" Horizontal Cross, Solid Bottom, 12" Radius, Steel Cable Tray	1,384.87	602.13
			For 4-5/8" Overall Height Instead Of 3-5/8", Add	*107.37*	

26 05 36 00-1607 24" Radius Horizontal Crosses *(26 05 36 00-1494)*

26 05 36 00-1608		EA	6" Horizontal Cross, Solid Bottom, 24" Radius, Steel Cable Tray	898.64	301.07
			For 4-5/8" Overall Height Instead Of 3-5/8", Add	*84.62*	
26 05 36 00-1609		EA	12" Horizontal Cross, Solid Bottom, 24" Radius, Steel Cable Tray	1,044.83	360.74
			For 4-5/8" Overall Height Instead Of 3-5/8", Add	*96.60*	
26 05 36 00-1610		EA	18" Horizontal Cross, Solid Bottom, 24" Radius, Steel Cable Tray	1,247.43	451.20
			For 4-5/8" Overall Height Instead Of 3-5/8", Add	*111.91*	
26 05 36 00-1611		EA	24" Horizontal Cross, Solid Bottom, 24" Radius, Steel Cable Tray	1,539.35	542.34
			For 4-5/8" Overall Height Instead Of 3-5/8", Add	*140.52*	
26 05 36 00-1612		EA	30" Horizontal Cross, Solid Bottom, 24" Radius, Steel Cable Tray	1,690.94	602.13
			For 4-5/8" Overall Height Instead Of 3-5/8", Add	*153.28*	
26 05 36 00-1613		EA	36" Horizontal Cross, Solid Bottom, 24" Radius, Steel Cable Tray	1,854.28	676.80
			For 4-5/8" Overall Height Instead Of 3-5/8", Add	*165.34*	

26 05 36 00-1614 36" Radius Horizontal Crosses *(26 05 36 00-1494)*

26 05 36 00-1615		EA	6" Horizontal Cross, Solid Bottom, 36" Radius, Steel Cable Tray	1,212.46	338.40
			For 4-5/8" Overall Height Instead Of 3-5/8", Add	*125.47*	
26 05 36 00-1616		EA	12" Horizontal Cross, Solid Bottom, 36" Radius, Steel Cable Tray	1,407.89	416.80
			For 4-5/8" Overall Height Instead Of 3-5/8", Add	*141.73*	
26 05 36 00-1617		EA	18" Horizontal Cross, Solid Bottom, 36" Radius, Steel Cable Tray	1,682.01	542.34
			For 4-5/8" Overall Height Instead Of 3-5/8", Add	*161.92*	
26 05 36 00-1618		EA	24" Horizontal Cross, Solid Bottom, 36" Radius, Steel Cable Tray	1,924.39	602.13
			For 4-5/8" Overall Height Instead Of 3-5/8", Add	*188.30*	
26 05 36 00-1619		EA	30" Horizontal Cross, Solid Bottom, 36" Radius, Steel Cable Tray	2,126.64	676.80
			For 4-5/8" Overall Height Instead Of 3-5/8", Add	*206.20*	
26 05 36 00-1620		EA	36" Horizontal Cross, Solid Bottom, 36" Radius, Steel Cable Tray	2,351.15	772.57
			For 4-5/8" Overall Height Instead Of 3-5/8", Add	*223.91*	

26 05 36 00-1621 Straight Reducers *(26 05 36 00-1494)*

26 05 36 00-1622		EA	12" To 6" Reducer, Solid Bottom, Steel Cable Tray	277.50	90.24
			For 4-5/8" Overall Height Instead Of 3-5/8", Add	*26.59*	
26 05 36 00-1623		EA	18" To 12" Reducer, Solid Bottom, Steel Cable Tray	299.67	101.97
			For 4-5/8" Overall Height Instead Of 3-5/8", Add	*27.95*	
26 05 36 00-1624		EA	24" To 18" Reducer, Solid Bottom, Steel Cable Tray	330.72	117.54
			For 4-5/8" Overall Height Instead Of 3-5/8", Add	*30.02*	
26 05 36 00-1625		EA	30" To 24" Reducer, Solid Bottom, Steel Cable Tray	370.86	135.36
			For 4-5/8" Overall Height Instead Of 3-5/8", Add	*33.07*	
26 05 36 00-1626		EA	36" To 30" Reducer, Solid Bottom, Steel Cable Tray	400.67	150.14
			For 4-5/8" Overall Height Instead Of 3-5/8", Add	*35.08*	

26 05 36 00-1627 Reducers *(26 05 36 00-1494)*

26 05 36 00-1628		EA	18" To 6" Reducer, Solid Bottom, Steel Cable Tray	299.77	102.08
			For 4-5/8" Overall Height Instead Of 3-5/8", Add	*27.96*	
26 05 36 00-1629		EA	24" To 12" Reducer, Solid Bottom, Steel Cable Tray	328.54	117.76
			For 4-5/8" Overall Height Instead Of 3-5/8", Add	*29.66*	
26 05 36 00-1630		EA	30" To 12" Reducer, Solid Bottom, Steel Cable Tray	365.49	135.25
			For 4-5/8" Overall Height Instead Of 3-5/8", Add	*32.28*	
26 05 36 00-1631		EA	30" To 18" Reducer, Solid Bottom, Steel Cable Tray	367.90	135.13
			For 4-5/8" Overall Height Instead Of 3-5/8", Add	*32.66*	
26 05 36 00-1632		EA	36" To 12" Reducer, Solid Bottom, Steel Cable Tray	398.08	150.14
			For 4-5/8" Overall Height Instead Of 3-5/8", Add	*34.69*	
26 05 36 00-1633		EA	36" To 18" Reducer, Solid Bottom, Steel Cable Tray	400.67	150.14
			For 4-5/8" Overall Height Instead Of 3-5/8", Add	*35.08*	
26 05 36 00-1634		EA	36" To 24" Reducer, Solid Bottom, Steel Cable Tray	403.71	150.37
			For 4-5/8" Overall Height Instead Of 3-5/8", Add	*35.49*	

26 05 36 00-1635 Dropout Or End Plate *(26 05 36 00-1494)*

26 05 36 00-1636		EA	6" Dropout Or End Plate, Solid Bottom, Steel Cable Tray	82.86	33.84
26 05 36 00-1637		EA	12" Dropout Or End Plate, Solid Bottom, Steel Cable Tray	101.75	41.29
26 05 36 00-1638		EA	18" Dropout Or End Plate, Solid Bottom, Steel Cable Tray	116.94	48.96
26 05 36 00-1639		EA	24" Dropout Or End Plate, Solid Bottom, Steel Cable Tray	131.87	54.15
26 05 36 00-1640		EA	30" Dropout Or End Plate, Solid Bottom, Steel Cable Tray	146.87	60.12
26 05 36 00-1641		EA	36" Dropout Or End Plate, Solid Bottom, Steel Cable Tray	162.73	67.68

26 05 36 00-1642 Solid Bottom Aluminum Straight Cable Tray Sections *(26 05 36 00-1486)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1643	LF	6" Solid Bottom Aluminum Cable Tray, Straight Section	28.49	7.11
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*3.09*	
26 05 36 00-1644	LF	12" Solid Bottom Aluminum Cable Tray, Straight Section	35.67	8.35
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*3.97*	
26 05 36 00-1645	LF	18" Solid Bottom Aluminum Cable Tray, Straight Section	45.50	10.83
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*5.01*	
26 05 36 00-1646	LF	24" Solid Bottom Aluminum Cable Tray, Straight Section	54.41	11.96
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*6.18*	
26 05 36 00-1647	LF	30" Solid Bottom Aluminum Cable Tray, Straight Section	66.47	15.46
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*7.40*	
26 05 36 00-1648	LF	36" Solid Bottom Steel Aluminum Tray, Straight Section	79.43	16.92
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*9.09*	

26 05 36 00-1649 Solid Bottom Aluminum Cable Tray Fittings *(26 05 36 00-1486)*

26 05 36 00-1650 90 Degree, 12" Radius Horizontal Elbows *(26 05 36 00-1649)*

26 05 36 00-1651	EA	6" Horizontal 90 Degree Elbow, Solid Bottom, 12" Radius, Aluminum Cable Tray	321.79	112.91
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*29.46*	
26 05 36 00-1652	EA	12" Horizontal 90 Degree Elbow, Solid Bottom, 12" Radius, Aluminum Cable Tray	387.34	142.13
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*34.40*	
26 05 36 00-1653	EA	18" Horizontal 90 Degree Elbow, Solid Bottom, 12" Radius, Aluminum Cable Tray	449.07	159.16
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*40.83*	
26 05 36 00-1654	EA	24" Horizontal 90 Degree Elbow, Solid Bottom, 12" Radius, Aluminum Cable Tray	522.53	186.91
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*47.22*	
26 05 36 00-1655	EA	30" Horizontal 90 Degree Elbow, Solid Bottom, 12" Radius, Aluminum Cable Tray	618.42	216.92
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*56.61*	
26 05 36 00-1656	EA	36" Horizontal 90 Degree Elbow, Solid Bottom, 12" Radius, Aluminum Cable Tray	698.70	246.25
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*63.76*	

26 05 36 00-1657 90 Degree, 24" Radius Horizontal Elbows *(26 05 36 00-1649)*

26 05 36 00-1658	EA	6" Horizontal 90 Degree Elbow, Solid Bottom, 24" Radius, Aluminum Cable Tray	386.02	117.54
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*38.31*	
26 05 36 00-1659	EA	12" Horizontal 90 Degree Elbow, Solid Bottom, 24" Radius, Aluminum Cable Tray	476.44	150.59
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*46.38*	
26 05 36 00-1660	EA	18" Horizontal 90 Degree Elbow, Solid Bottom, 24" Radius, Aluminum Cable Tray	538.88	169.20
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*52.63*	
26 05 36 00-1661	EA	24" Horizontal 90 Degree Elbow, Solid Bottom, 24" Radius, Aluminum Cable Tray	651.56	200.45
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*64.32*	
26 05 36 00-1662	EA	30" Horizontal 90 Degree Elbow, Solid Bottom, 24" Radius, Aluminum Cable Tray	755.06	234.96
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*74.09*	
26 05 36 00-1663	EA	36" Horizontal 90 Degree Elbow, Solid Bottom, 24" Radius, Aluminum Cable Tray	868.89	270.72
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*85.21*	

26 05 36 00-1664 90 Degree, 36" Radius Horizontal Elbows *(26 05 36 00-1649)*

26 05 36 00-1665	EA	6" Horizontal 90 Degree Elbow, Solid Bottom, 36" Radius, Aluminum Cable Tray	486.59	122.84
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*52.52*	
26 05 36 00-1666	EA	12" Horizontal 90 Degree Elbow, Solid Bottom, 36" Radius, Aluminum Cable Tray	604.12	159.50
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*64.04*	
26 05 36 00-1667	EA	18" Horizontal 90 Degree Elbow, Solid Bottom, 36" Radius, Aluminum Cable Tray	702.27	180.82
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*75.21*	
26 05 36 00-1668	EA	24" Horizontal 90 Degree Elbow, Solid Bottom, 36" Radius, Aluminum Cable Tray	790.84	216.35
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*82.56*	
26 05 36 00-1669	EA	30" Horizontal 90 Degree Elbow, Solid Bottom, 36" Radius, Aluminum Cable Tray	916.49	257.97
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*94.49*	
26 05 36 00-1670	EA	36" Horizontal 90 Degree Elbow, Solid Bottom, 36" Radius, Aluminum Cable Tray	1,070.15	300.05
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*110.52*	

26 05 36 00-1671 45 Degree, 12" Radius Horizontal Elbows *(26 05 36 00-1649)*

26 05 36 00-1672	EA	6" Horizontal 45 Degree Elbow, Solid Bottom, 12" Radius, Aluminum Cable Tray	292.51	112.91
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*25.05*	
26 05 36 00-1673	EA	12" Horizontal 45 Degree Elbow, Solid Bottom, 12" Radius, Aluminum Cable Tray	354.26	142.13
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*29.44*	
26 05 36 00-1674	EA	18" Horizontal 45 Degree Elbow, Solid Bottom, 12" Radius, Aluminum Cable Tray	408.39	159.05
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*34.75*	
26 05 36 00-1675	EA	24" Horizontal 45 Degree Elbow, Solid Bottom, 12" Radius, Aluminum Cable Tray	475.45	186.57
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*40.23*	
26 05 36 00-1676	EA	30" Horizontal 45 Degree Elbow, Solid Bottom, 12" Radius, Aluminum Cable Tray	561.91	216.92
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*48.13*	
26 05 36 00-1677	EA	36" Horizontal 45 Degree Elbow, Solid Bottom, 12" Radius, Aluminum Cable Tray	634.09	245.56
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*54.18*	

26 05 36 00-1678 45 Degree, 24" Radius Horizontal Elbows *(26 05 36 00-1649)*

26 05 36 00-1679	EA	6" Horizontal 45 Degree Elbow, Solid Bottom, 24" Radius, Aluminum Cable Tray	344.35	117.65
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*32.04*	
26 05 36 00-1680	EA	12" Horizontal 45 Degree Elbow, Solid Bottom, 24" Radius, Aluminum Cable Tray	426.60	150.37
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*38.92*	
26 05 36 00-1681	EA	18" Horizontal 45 Degree Elbow, Solid Bottom, 24" Radius, Aluminum Cable Tray	482.93	169.54
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*44.18*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1682	EA	24" Horizontal 45 Degree Elbow, Solid Bottom, 24" Radius, Aluminum Cable Tray	581.73	200.45
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*53.85*	
26 05 36 00-1683	EA	30" Horizontal 45 Degree Elbow, Solid Bottom, 24" Radius, Aluminum Cable Tray	676.20	235.64
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*62.15*	
26 05 36 00-1684	EA	36" Horizontal 45 Degree Elbow, Solid Bottom, 24" Radius, Aluminum Cable Tray	777.00	270.72
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*71.43*	
26 05 36 00-1685		**45 Degree, 36" Radius Horizontal Elbows** *(26 05 36 00-1649)*		
26 05 36 00-1686	EA	6" Horizontal 45 Degree Elbow, Solid Bottom, 36" Radius, Aluminum Cable Tray	424.86	122.95
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*43.23*	
26 05 36 00-1687	EA	12" Horizontal 45 Degree Elbow, Solid Bottom, 36" Radius, Aluminum Cable Tray	529.19	159.16
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*52.85*	
26 05 36 00-1688	EA	18" Horizontal 45 Degree Elbow, Solid Bottom, 36" Radius, Aluminum Cable Tray	614.06	180.82
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*61.98*	
26 05 36 00-1689	EA	24" Horizontal 45 Degree Elbow, Solid Bottom, 36" Radius, Aluminum Cable Tray	697.11	216.92
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*68.41*	
26 05 36 00-1690	EA	30" Horizontal 45 Degree Elbow, Solid Bottom, 36" Radius, Aluminum Cable Tray	809.43	257.97
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*78.43*	
26 05 36 00-1691	EA	36" Horizontal 45 Degree Elbow, Solid Bottom, 36" Radius, Aluminum Cable Tray	946.49	301.07
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*91.80*	
26 05 36 00-1692		**90 Degree, 12" Radius Vertical Risers** *(26 05 36 00-1649)*		
26 05 36 00-1693	EA	6" Vertical Riser 90 Degree, Solid Bottom, 12" Radius, Aluminum Cable Tray	346.35	112.58
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*33.19*	
26 05 36 00-1694	EA	12" Vertical Riser 90 Degree, Solid Bottom, 12" Radius, Aluminum Cable Tray	401.96	142.13
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*36.60*	
26 05 36 00-1695	EA	18" Vertical Riser 90 Degree, Solid Bottom, 12" Radius, Aluminum Cable Tray	451.16	159.16
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*41.15*	
26 05 36 00-1696	EA	24" Vertical Riser 90 Degree, Solid Bottom, 12" Radius, Aluminum Cable Tray	507.91	186.91
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*45.03*	
26 05 36 00-1697	EA	30" Vertical Riser 90 Degree, Solid Bottom, 12" Radius, Aluminum Cable Tray	570.38	216.92
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*49.40*	
26 05 36 00-1698	EA	36" Vertical Riser 90 Degree, Solid Bottom, 12" Radius, Aluminum Cable Tray	624.40	245.56
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*52.73*	
26 05 36 00-1699		**90 Degree, 24" Radius Vertical Risers** *(26 05 36 00-1649)*		
26 05 36 00-1700	EA	6" Vertical Riser 90 Degree, Solid Bottom, 24" Radius, Aluminum Cable Tray	421.52	117.54
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*43.63*	
26 05 36 00-1701	EA	12" Vertical Riser 90 Degree, Solid Bottom, 24" Radius, Aluminum Cable Tray	495.24	150.59
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*49.20*	
26 05 36 00-1702	EA	18" Vertical Riser 90 Degree, Solid Bottom, 24" Radius, Aluminum Cable Tray	545.14	169.20
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*53.57*	
26 05 36 00-1703	EA	24" Vertical Riser 90 Degree, Solid Bottom, 24" Radius, Aluminum Cable Tray	620.24	200.45
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*59.62*	
26 05 36 00-1704	EA	30" Vertical Riser 90 Degree, Solid Bottom, 24" Radius, Aluminum Cable Tray	694.50	234.96
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*65.01*	
26 05 36 00-1705	EA	36" Vertical Riser 90 Degree, Solid Bottom, 24" Radius, Aluminum Cable Tray	785.35	270.72
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*72.68*	
26 05 36 00-1706		**90 Degree, 36" Radius Vertical Risers** *(26 05 36 00-1649)*		
26 05 36 00-1707	EA	6" Vertical Riser 90 Degree, Solid Bottom, 36" Radius, Aluminum Cable Tray	501.21	122.84
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*54.72*	
26 05 36 00-1708	EA	12" Vertical Riser 90 Degree, Solid Bottom, 36" Radius, Aluminum Cable Tray	599.94	159.50
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*63.41*	
26 05 36 00-1709	EA	18" Vertical Riser 90 Degree, Solid Bottom, 36" Radius, Aluminum Cable Tray	664.68	180.82
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*69.57*	
26 05 36 00-1710	EA	24" Vertical Riser 90 Degree, Solid Bottom, 36" Radius, Aluminum Cable Tray	738.63	216.35
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*74.73*	
26 05 36 00-1711	EA	30" Vertical Riser 90 Degree, Solid Bottom, 36" Radius, Aluminum Cable Tray	847.57	257.97
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*84.15*	
26 05 36 00-1712	EA	36" Vertical Riser 90 Degree, Solid Bottom, 36" Radius, Aluminum Cable Tray	934.40	300.05
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*90.16*	
26 05 36 00-1713		**12" Radius Horizontal Tees** *(26 05 36 00-1649)*		
26 05 36 00-1714	EA	6" Horizontal Tee, Solid Bottom, 12" Radius, Aluminum Cable Tray	567.84	216.69
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*49.07*	
26 05 36 00-1715	EA	12" Horizontal Tee, Solid Bottom, 12" Radius, Aluminum Cable Tray	659.90	245.56
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*58.06*	
26 05 36 00-1716	EA	18" Horizontal Tee, Solid Bottom, 12" Radius, Aluminum Cable Tray	733.14	270.72
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*64.85*	
26 05 36 00-1717	EA	24" Horizontal Tee, Solid Bottom, 12" Radius, Aluminum Cable Tray	817.14	301.07
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*72.39*	
26 05 36 00-1718	EA	30" Horizontal Tee, Solid Bottom, 12" Radius, Aluminum Cable Tray	964.67	360.74
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*84.57*	
26 05 36 00-1719	EA	36" Horizontal Tee, Solid Bottom, 12" Radius, Aluminum Cable Tray	1,169.69	451.20
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*100.25*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1720		**24" Radius Horizontal Tees** *(26 05 36 00-1649)*		
26 05 36 00-1721	EA	6" Horizontal Tee, Solid Bottom, 24" Radius, Aluminum Cable Tray	732.63	235.30
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*70.67*	
26 05 36 00-1722	EA	12" Horizontal Tee, Solid Bottom, 24" Radius, Aluminum Cable Tray	835.47	270.72
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*80.20*	
26 05 36 00-1723	EA	18" Horizontal Tee, Solid Bottom, 24" Radius, Aluminum Cable Tray	935.29	300.50
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*90.20*	
26 05 36 00-1724	EA	24" Horizontal Tee, Solid Bottom, 24" Radius, Aluminum Cable Tray	1,133.83	360.74
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*109.95*	
26 05 36 00-1725	EA	30" Horizontal Tee, Solid Bottom, 24" Radius, Aluminum Cable Tray	1,357.65	451.20
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*128.45*	
26 05 36 00-1726	EA	36" Horizontal Tee, Solid Bottom, 24" Radius, Aluminum Cable Tray	1,500.92	493.27
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*142.92*	
26 05 36 00-1727		**36" Radius Horizontal Tees** *(26 05 36 00-1649)*		
26 05 36 00-1728	EA	6" Horizontal Tee, Solid Bottom, 36" Radius, Aluminum Cable Tray	983.32	257.97
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*104.51*	
26 05 36 00-1729	EA	12" Horizontal Tee, Solid Bottom, 36" Radius, Aluminum Cable Tray	1,106.54	300.50
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*115.89*	
26 05 36 00-1730	EA	18" Horizontal Tee, Solid Bottom, 36" Radius, Aluminum Cable Tray	1,263.63	338.40
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*133.14*	
26 05 36 00-1731	EA	24" Horizontal Tee, Solid Bottom, 36" Radius, Aluminum Cable Tray	1,507.38	415.67
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*156.82*	
26 05 36 00-1732	EA	30" Horizontal Tee, Solid Bottom, 36" Radius, Aluminum Cable Tray	1,801.88	542.34
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*179.90*	
26 05 36 00-1733	EA	36" Horizontal Tee, Solid Bottom, 36" Radius, Aluminum Cable Tray	2,006.03	602.13
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*200.55*	
26 05 36 00-1734		**12" Radius Vertical Tees** *(26 05 36 00-1649)*		
26 05 36 00-1735	EA	6" Vertical Tee, Solid Bottom, 12" Radius, Aluminum Cable Tray	655.55	216.69
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*62.22*	
26 05 36 00-1736	EA	12" Vertical Tee, Solid Bottom, 12" Radius, Aluminum Cable Tray	710.63	245.90
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*65.61*	
26 05 36 00-1737	EA	18" Vertical Tee, Solid Bottom, 12" Radius, Aluminum Cable Tray	742.49	257.52
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*68.45*	
26 05 36 00-1738	EA	24" Vertical Tee, Solid Bottom, 12" Radius, Aluminum Cable Tray	784.63	270.27
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*72.65*	
26 05 36 00-1739	EA	30" Vertical Tee, Solid Bottom, 12" Radius, Aluminum Cable Tray	864.28	300.50
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*79.55*	
26 05 36 00-1740	EA	36" Vertical Tee, Solid Bottom, 12" Radius, Aluminum Cable Tray	985.55	360.74
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*87.70*	
26 05 36 00-1741		**24" Radius Vertical Tees** *(26 05 36 00-1649)*		
26 05 36 00-1742	EA	6" Vertical Tee, Solid Bottom, 24" Radius, Aluminum Cable Tray	826.61	235.30
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*84.77*	
26 05 36 00-1743	EA	12" Vertical Tee, Solid Bottom, 24" Radius, Aluminum Cable Tray	910.66	270.72
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*91.48*	
26 05 36 00-1744	EA	18" Vertical Tee, Solid Bottom, 24" Radius, Aluminum Cable Tray	965.54	284.82
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*97.36*	
26 05 36 00-1745	EA	24" Vertical Tee, Solid Bottom, 24" Radius, Aluminum Cable Tray	1,033.44	300.50
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*104.93*	
26 05 36 00-1746	EA	30" Vertical Tee, Solid Bottom, 24" Radius, Aluminum Cable Tray	1,148.77	338.40
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*115.92*	
26 05 36 00-1747	EA	36" Vertical Tee, Solid Bottom, 24" Radius, Aluminum Cable Tray	1,308.97	415.67
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*127.06*	
26 05 36 00-1748		**36" Radius Vertical Tees** *(26 05 36 00-1649)*		
26 05 36 00-1749	EA	6" Vertical Tee, Solid Bottom, 36" Radius, Aluminum Cable Tray	1,107.97	257.52
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*123.27*	
26 05 36 00-1750	EA	12" Vertical Tee, Solid Bottom, 36" Radius, Aluminum Cable Tray	1,204.81	296.89
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*131.25*	
26 05 36 00-1751	EA	18" Vertical Tee, Solid Bottom, 36" Radius, Aluminum Cable Tray	1,281.92	318.10
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*139.28*	
26 05 36 00-1752	EA	24" Vertical Tee, Solid Bottom, 36" Radius, Aluminum Cable Tray	1,336.73	338.40
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*144.11*	
26 05 36 00-1753	EA	30" Vertical Tee, Solid Bottom, 36" Radius, Aluminum Cable Tray	1,479.22	386.34
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*157.50*	
26 05 36 00-1754	EA	36" Vertical Tee, Solid Bottom, 36" Radius, Aluminum Cable Tray	911.66	491.81
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*54.77*	
26 05 36 00-1755		**12" Radius Horizontal Crosses** *(26 05 36 00-1649)*		
26 05 36 00-1756	EA	6" Horizontal Cross, Solid Bottom, 12" Radius, Aluminum Cable Tray	673.03	245.90
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*59.97*	
26 05 36 00-1757	EA	12" Horizontal Cross, Solid Bottom, 12" Radius, Aluminum Cable Tray	747.76	270.72
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*67.04*	
26 05 36 00-1758	EA	18" Horizontal Cross, Solid Bottom, 12" Radius, Aluminum Cable Tray	868.41	318.10
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*77.25*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1759	EA	24" Horizontal Cross, Solid Bottom, 12" Radius, Aluminum Cable Tray	1,028.11	386.34
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*89.83*	
26 05 36 00-1760	EA	30" Horizontal Cross, Solid Bottom, 12" Radius, Aluminum Cable Tray	1,127.28	415.67
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*99.80*	
26 05 36 00-1761	EA	36" Horizontal Cross, Solid Bottom, 12" Radius, Aluminum Cable Tray	1,302.51	493.27
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*113.16*	

26 05 36 00-1762 24" Radius Horizontal Crosses *(26 05 36 00-1649)*

26 05 36 00-1763	EA	6" Horizontal Cross, Solid Bottom, 24" Radius, Aluminum Cable Tray	911.39	271.17
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*91.52*	
26 05 36 00-1764	EA	12" Horizontal Cross, Solid Bottom, 24" Radius, Aluminum Cable Tray	1,033.44	300.50
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*104.93*	
26 05 36 00-1765	EA	18" Horizontal Cross, Solid Bottom, 24" Radius, Aluminum Cable Tray	1,179.78	360.74
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*116.84*	
26 05 36 00-1766	EA	24" Horizontal Cross, Solid Bottom, 24" Radius, Aluminum Cable Tray	1,453.64	452.45
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*142.65*	
26 05 36 00-1767	EA	30" Horizontal Cross, Solid Bottom, 24" Radius, Aluminum Cable Tray	1,594.90	493.27
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*157.02*	
26 05 36 00-1768	EA	36" Horizontal Cross, Solid Bottom, 24" Radius, Aluminum Cable Tray	1,807.62	602.13
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*170.79*	

26 05 36 00-1769 36" Radius Horizontal Crosses *(26 05 36 00-1649)*

26 05 36 00-1770	EA	6" Horizontal Cross, Solid Bottom, 36" Radius, Aluminum Cable Tray	1,284.06	300.50
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*142.52*	
26 05 36 00-1771	EA	12" Horizontal Cross, Solid Bottom, 36" Radius, Aluminum Cable Tray	1,409.82	338.40
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*155.07*	
26 05 36 00-1772	EA	18" Horizontal Cross, Solid Bottom, 36" Radius, Aluminum Cable Tray	1,634.38	416.80
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*175.70*	
26 05 36 00-1773	EA	24" Horizontal Cross, Solid Bottom, 36" Radius, Aluminum Cable Tray	1,927.19	542.34
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*198.69*	
26 05 36 00-1774	EA	30" Horizontal Cross, Solid Bottom, 36" Radius, Aluminum Cable Tray	2,110.45	602.13
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*216.21*	
26 05 36 00-1775	EA	36" Horizontal Cross, Solid Bottom, 36" Radius, Aluminum Cable Tray	2,422.84	676.80
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*250.63*	

26 05 36 00-1776 Straight Reducers *(26 05 36 00-1649)*

26 05 36 00-1777	EA	12" To 6" Reducer, Solid Bottom, Aluminum Cable Tray	258.49	77.38
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*25.87*	
26 05 36 00-1778	EA	18" To 12" Reducer, Solid Bottom, Aluminum Cable Tray	283.82	90.12
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*27.56*	
26 05 36 00-1779	EA	24" To 18" Reducer, Solid Bottom, Aluminum Cable Tray	311.99	101.97
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*29.80*	
26 05 36 00-1780	EA	30" To 24" Reducer, Solid Bottom, Aluminum Cable Tray	350.66	117.65
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*32.99*	
26 05 36 00-1781	EA	36" To 30" Reducer, Solid Bottom, Aluminum Cable Tray	388.14	135.13
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*35.70*	

26 05 36 00-1782 Reducers *(26 05 36 00-1649)*

26 05 36 00-1783	EA	18" To 6" Reducer, Solid Bottom, Aluminum Cable Tray	281.81	90.12
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*27.25*	
26 05 36 00-1784	EA	24" To 12" Reducer, Solid Bottom, Aluminum Cable Tray	310.23	102.19
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*29.50*	
26 05 36 00-1785	EA	30" To 12" Reducer, Solid Bottom, Aluminum Cable Tray	346.34	117.54
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*32.35*	
26 05 36 00-1786	EA	30" To 18" Reducer, Solid Bottom, Aluminum Cable Tray	348.30	117.54
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*32.66*	
26 05 36 00-1787	EA	36" To 12" Reducer, Solid Bottom, Aluminum Cable Tray	388.14	135.13
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*35.70*	
26 05 36 00-1788	EA	36" To 18" Reducer, Solid Bottom, Aluminum Cable Tray	390.23	135.13
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*36.01*	
26 05 36 00-1789	EA	36" To 24" Reducer, Solid Bottom, Aluminum Cable Tray	394.76	135.36
		For 4-5/8" Overall Height Instead Of 3-5/8", Add	*36.65*	

26 05 36 00-1790 Dropout Or End Plate *(26 05 36 00-1649)*

26 05 36 00-1791	EA	6" Dropout Or End Plate, Solid Bottom, Aluminum Cable Tray	82.82	33.84
26 05 36 00-1792	EA	12" Dropout Or End Plate, Solid Bottom, Aluminum Cable Tray	98.67	41.29
26 05 36 00-1793	EA	18" Dropout Or End Plate, Solid Bottom, Aluminum Cable Tray	117.37	48.96
26 05 36 00-1794	EA	24" Dropout Or End Plate, Solid Bottom, Aluminum Cable Tray	129.61	54.15
26 05 36 00-1795	EA	30" Dropout Or End Plate, Solid Bottom, Aluminum Cable Tray	146.13	60.12
26 05 36 00-1796	EA	36" Dropout Or End Plate, Solid Bottom, Aluminum Cable Tray	166.06	67.68

26 05 36 00-1797 Vented Bottom Cable Tray *(26 05 36 00-0001)*

Note: 6" Height.

26 05 36 00-1798 Vented Bottom Galvanized Steel Cable Tray *(26 05 36 00-1797)*

26 05 36 00-1799	LF	6" Vented Bottom Steel Cable Tray, Straight Section	40.85	11.85
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-3.10*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1800	LF	12" Vented Bottom Steel Cable Tray, Straight Section	48.21	13.53
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-3.70*	
26 05 36 00-1801	LF	18" Vented Bottom Steel Cable Tray, Straight Section	56.88	15.57
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-4.39*	
26 05 36 00-1802	LF	24" Vented Bottom Steel Cable Tray, Straight Section	65.28	17.82
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-5.04*	
26 05 36 00-1803	LF	30" Vented Bottom Steel Cable Tray, Straight Section	86.89	21.54
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-6.89*	
26 05 36 00-1804	LF	36" Vented Bottom Steel Cable Tray, Straight Section	102.19	27.07
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-7.96*	

26 05 36 00-1805 Vented Bottom Galvanized Steel Cable Tray Fittings *(26 05 36 00-1797)*

26 05 36 00-1806 90 Degree, 12" Radius Horizontal Elbows *(26 05 36 00-1805)*

26 05 36 00-1807	EA	6" Horizontal 90 Degree Elbow, Vented Bottom, 12" Radius, Steel Cable Tray	367.30	142.58
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-24.85*	
26 05 36 00-1808	EA	12" Horizontal 90 Degree Elbow, Vented Bottom, 12" Radius, Steel Cable Tray	475.51	192.89
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-31.47*	
26 05 36 00-1809	EA	18" Horizontal 90 Degree Elbow, Vented Bottom, 12" Radius, Steel Cable Tray	586.89	245.90
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-38.19*	
26 05 36 00-1810	EA	24" Horizontal 90 Degree Elbow, Vented Bottom, 12" Radius, Steel Cable Tray	720.00	301.07
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-46.91*	
26 05 36 00-1811	EA	30" Horizontal 90 Degree Elbow, Vented Bottom, 12" Radius, Steel Cable Tray	812.44	339.08
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-52.99*	
26 05 36 00-1812	EA	36" Horizontal 90 Degree Elbow, Vented Bottom, 12" Radius, Steel Cable Tray	931.43	387.13
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-60.88*	

26 05 36 00-1813 90 Degree, 24" Radius Horizontal Elbows *(26 05 36 00-1805)*

26 05 36 00-1814	EA	6" Horizontal 90 Degree Elbow, Vented Bottom, 24" Radius, Steel Cable Tray	442.00	150.25
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-31.68*	
26 05 36 00-1815	EA	12" Horizontal 90 Degree Elbow, Vented Bottom, 24" Radius, Steel Cable Tray	567.94	208.35
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-39.43*	
26 05 36 00-1816	EA	18" Horizontal 90 Degree Elbow, Vented Bottom, 24" Radius, Steel Cable Tray	717.91	270.72
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-49.23*	
26 05 36 00-1817	EA	24" Horizontal 90 Degree Elbow, Vented Bottom, 24" Radius, Steel Cable Tray	864.65	338.40
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-58.27*	
26 05 36 00-1818	EA	30" Horizontal 90 Degree Elbow, Vented Bottom, 24" Radius, Steel Cable Tray	929.37	349.57
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-63.80*	
26 05 36 00-1819	EA	36" Horizontal 90 Degree Elbow, Vented Bottom, 24" Radius, Steel Cable Tray	1,154.49	451.20
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-77.85*	

26 05 36 00-1820 90 Degree, 36" Radius Horizontal Elbows *(26 05 36 00-1805)*

26 05 36 00-1821	EA	6" Horizontal 90 Degree Elbow, Vented Bottom, 36" Radius, Steel Cable Tray	550.90	158.83
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-41.85*	
26 05 36 00-1822	EA	12" Horizontal 90 Degree Elbow, Vented Bottom, 36" Radius, Steel Cable Tray	703.83	225.94
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-51.56*	
26 05 36 00-1823	EA	18" Horizontal 90 Degree Elbow, Vented Bottom, 36" Radius, Steel Cable Tray	894.57	301.07
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-64.37*	
26 05 36 00-1824	EA	24" Horizontal 90 Degree Elbow, Vented Bottom, 36" Radius, Steel Cable Tray	1,058.45	386.34
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-73.65*	
26 05 36 00-1825	EA	30" Horizontal 90 Degree Elbow, Vented Bottom, 36" Radius, Steel Cable Tray	1,217.53	451.20
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-84.15*	
26 05 36 00-1826	EA	36" Horizontal 90 Degree Elbow, Vented Bottom, 36" Radius, Steel Cable Tray	1,419.83	540.54
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-96.94*	

26 05 36 00-1827 45 Degree, 12" Radius Horizontal Elbows *(26 05 36 00-1805)*

26 05 36 00-1828	EA	6" Horizontal 45 Degree Elbow, Vented Bottom, 12" Radius, Steel Cable Tray	338.96	142.69
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-22.01*	
26 05 36 00-1829	EA	12" Horizontal 45 Degree Elbow, Vented Bottom, 12" Radius, Steel Cable Tray	441.64	192.89
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-28.09*	
26 05 36 00-1830	EA	18" Horizontal 45 Degree Elbow, Vented Bottom, 12" Radius, Steel Cable Tray	547.35	245.56
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-34.27*	
26 05 36 00-1831	EA	24" Horizontal 45 Degree Elbow, Vented Bottom, 12" Radius, Steel Cable Tray	671.10	300.50
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-42.07*	
26 05 36 00-1832	EA	30" Horizontal 45 Degree Elbow, Vented Bottom, 12" Radius, Steel Cable Tray	758.03	339.08
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-47.55*	
26 05 36 00-1833	EA	36" Horizontal 45 Degree Elbow, Vented Bottom, 12" Radius, Steel Cable Tray	867.00	386.34
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-54.51*	

26 05 36 00-1834 45 Degree, 24" Radius Horizontal Elbows *(26 05 36 00-1805)*

26 05 36 00-1835	EA	6" Horizontal 45 Degree Elbow, Vented Bottom, 24" Radius, Steel Cable Tray	400.08	150.37
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-27.47*	
26 05 36 00-1836	EA	12" Horizontal 45 Degree Elbow, Vented Bottom, 24" Radius, Steel Cable Tray	519.40	208.35
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-34.58*	
26 05 36 00-1837	EA	18" Horizontal 45 Degree Elbow, Vented Bottom, 24" Radius, Steel Cable Tray	659.96	271.17
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-43.40*	
26 05 36 00-1838	EA	24" Horizontal 45 Degree Elbow, Vented Bottom, 24" Radius, Steel Cable Tray	798.51	338.40
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-51.65*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1839	EA	30" Horizontal 45 Degree Elbow, Vented Bottom, 24" Radius, Steel Cable Tray	915.76	387.13
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-59.31*	
26 05 36 00-1840	EA	36" Horizontal 45 Degree Elbow, Vented Bottom, 24" Radius, Steel Cable Tray	1,065.94	451.20
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-68.99*	

26 05 36 00-1841 45 Degree, 36" Radius Horizontal Elbows *(26 05 36 00-1805)*

26 05 36 00-1842	EA	6" Horizontal 45 Degree Elbow, Vented Bottom, 36" Radius, Steel Cable Tray	488.45	159.16
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-35.58*	
26 05 36 00-1843	EA	12" Horizontal 45 Degree Elbow, Vented Bottom, 36" Radius, Steel Cable Tray	630.81	225.27
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-44.31*	
26 05 36 00-1844	EA	18" Horizontal 45 Degree Elbow, Vented Bottom, 36" Radius, Steel Cable Tray	808.16	301.07
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-55.73*	
26 05 36 00-1845	EA	24" Horizontal 45 Degree Elbow, Vented Bottom, 36" Radius, Steel Cable Tray	968.72	387.13
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-64.61*	
26 05 36 00-1846	EA	30" Horizontal 45 Degree Elbow, Vented Bottom, 36" Radius, Steel Cable Tray	1,115.11	451.20
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-73.91*	
26 05 36 00-1847	EA	36" Horizontal 45 Degree Elbow, Vented Bottom, 36" Radius, Steel Cable Tray	1,308.57	542.34
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-85.66*	

26 05 36 00-1848 90 Degree, 12" Radius Vertical Risers *(26 05 36 00-1805)*

26 05 36 00-1849	EA	6" Vertical Riser 90 Degree, Vented Bottom, 12" Radius, Steel Cable Tray	404.27	142.13
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-28.58*	
26 05 36 00-1850	EA	12" Vertical Riser 90 Degree, Vented Bottom, 12" Radius, Steel Cable Tray	508.25	192.89
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-34.75*	
26 05 36 00-1851	EA	18" Vertical Riser 90 Degree, Vented Bottom, 12" Radius, Steel Cable Tray	599.01	245.90
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-39.41*	
26 05 36 00-1852	EA	24" Vertical Riser 90 Degree, Vented Bottom, 12" Radius, Steel Cable Tray	717.57	301.07
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-46.67*	
26 05 36 00-1853	EA	30" Vertical Riser 90 Degree, Vented Bottom, 12" Radius, Steel Cable Tray	785.77	339.08
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-50.32*	
26 05 36 00-1854	EA	36" Vertical Riser 90 Degree, Vented Bottom, 12" Radius, Steel Cable Tray	876.60	386.34
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-55.47*	

26 05 36 00-1855 90 Degree, 24" Radius Vertical Risers *(26 05 36 00-1805)*

26 05 36 00-1856	EA	6" Vertical Riser 90 Degree, Vented Bottom, 24" Radius, Steel Cable Tray	490.49	150.25
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-36.53*	
26 05 36 00-1857	EA	12" Vertical Riser 90 Degree, Vented Bottom, 24" Radius, Steel Cable Tray	601.89	208.35
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-42.82*	
26 05 36 00-1858	EA	18" Vertical Riser 90 Degree, Vented Bottom, 24" Radius, Steel Cable Tray	732.46	270.72
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-50.69*	
26 05 36 00-1859	EA	24" Vertical Riser 90 Degree, Vented Bottom, 24" Radius, Steel Cable Tray	854.96	338.40
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-57.30*	
26 05 36 00-1860	EA	30" Vertical Riser 90 Degree, Vented Bottom, 24" Radius, Steel Cable Tray	971.16	386.34
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-64.92*	
26 05 36 00-1861	EA	36" Vertical Riser 90 Degree, Vented Bottom, 24" Radius, Steel Cable Tray	1,093.87	451.20
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-71.79*	

26 05 36 00-1862 90 Degree, 36" Radius Vertical Risers *(26 05 36 00-1805)*

26 05 36 00-1863	EA	6" Vertical Riser 90 Degree, Vented Bottom, 36" Radius, Steel Cable Tray	589.69	158.83
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-45.73*	
26 05 36 00-1864	EA	12" Vertical Riser 90 Degree, Vented Bottom, 36" Radius, Steel Cable Tray	720.81	225.94
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-53.26*	
26 05 36 00-1865	EA	18" Vertical Riser 90 Degree, Vented Bottom, 36" Radius, Steel Cable Tray	884.87	301.07
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-63.40*	
26 05 36 00-1866	EA	24" Vertical Riser 90 Degree, Vented Bottom, 36" Radius, Steel Cable Tray	1,053.60	386.34
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-73.17*	
26 05 36 00-1867	EA	30" Vertical Riser 90 Degree, Vented Bottom, 36" Radius, Steel Cable Tray	1,171.46	451.20
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-79.55*	
26 05 36 00-1868	EA	36" Vertical Riser 90 Degree, Vented Bottom, 36" Radius, Steel Cable Tray	1,366.49	540.54
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-91.60*	

26 05 36 00-1869 12" Radius Horizontal Tees *(26 05 36 00-1805)*

26 05 36 00-1870	EA	6" Horizontal Tee, Vented Bottom, 12" Radius, Steel Cable Tray	647.59	270.72
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-42.20*	
26 05 36 00-1871	EA	12" Horizontal Tee, Vented Bottom, 12" Radius, Steel Cable Tray	781.10	337.72
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-49.97*	
26 05 36 00-1872	EA	18" Horizontal Tee, Vented Bottom, 12" Radius, Steel Cable Tray	892.63	387.13
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-57.00*	
26 05 36 00-1873	EA	24" Horizontal Tee, Vented Bottom, 12" Radius, Steel Cable Tray	1,038.11	451.20
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-66.21*	
26 05 36 00-1874	EA	30" Horizontal Tee, Vented Bottom, 12" Radius, Steel Cable Tray	1,147.09	491.81
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-73.72*	
26 05 36 00-1875	EA	36" Horizontal Tee, Vented Bottom, 12" Radius, Steel Cable Tray	1,259.80	540.54
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-80.93*	

26 05 36 00-1876 24" Radius Horizontal Tees *(26 05 36 00-1805)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1877	EA	6" Horizontal Tee, Vented Bottom, 24" Radius, Steel Cable Tray	825.79	300.50
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-57.53*	
26 05 36 00-1878	EA	12" Horizontal Tee, Vented Bottom, 24" Radius, Steel Cable Tray	997.84	386.34
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-67.59*	
26 05 36 00-1879	EA	18" Horizontal Tee, Vented Bottom, 24" Radius, Steel Cable Tray	1,147.21	451.20
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-77.12*	
26 05 36 00-1880	EA	24" Horizontal Tee, Vented Bottom, 24" Radius, Steel Cable Tray	1,414.98	540.54
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-96.45*	
26 05 36 00-1881	EA	30" Horizontal Tee, Vented Bottom, 24" Radius, Steel Cable Tray	1,561.23	602.13
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-105.94*	
26 05 36 00-1882	EA	36" Horizontal Tee, Vented Bottom, 24" Radius, Steel Cable Tray	1,743.85	676.80
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-117.99*	

26 05 36 00-1883 36" Radius Horizontal Tees *(26 05 36 00-1805)*

26 05 36 00-1884	EA	6" Horizontal Tee, Vented Bottom, 36" Radius, Steel Cable Tray	1,029.53	338.40
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-74.75*	
26 05 36 00-1885	EA	12" Horizontal Tee, Vented Bottom, 36" Radius, Steel Cable Tray	1,282.99	451.20
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-90.70*	
26 05 36 00-1886	EA	18" Horizontal Tee, Vented Bottom, 36" Radius, Steel Cable Tray	1,483.34	542.34
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-103.14*	
26 05 36 00-1887	EA	24" Horizontal Tee, Vented Bottom, 36" Radius, Steel Cable Tray	1,826.29	676.80
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-126.23*	
26 05 36 00-1888	EA	30" Horizontal Tee, Vented Bottom, 36" Radius, Steel Cable Tray	2,033.10	776.18
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-138.63*	
26 05 36 00-1889	EA	36" Horizontal Tee, Vented Bottom, 36" Radius, Steel Cable Tray	2,372.87	900.03
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-162.29*	

26 05 36 00-1890 12" Radius Vertical Tees *(26 05 36 00-1805)*

26 05 36 00-1891	EA	6" Vertical Tee, Vented Bottom, 12" Radius, Steel Cable Tray	778.52	270.72
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-55.29*	
26 05 36 00-1892	EA	12" Vertical Tee, Vented Bottom, 12" Radius, Steel Cable Tray	896.17	338.40
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-61.42*	
26 05 36 00-1893	EA	18" Vertical Tee, Vented Bottom, 12" Radius, Steel Cable Tray	940.73	360.74
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-64.01*	
26 05 36 00-1894	EA	24" Vertical Tee, Vented Bottom, 12" Radius, Steel Cable Tray	1,002.68	386.34
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-68.08*	
26 05 36 00-1895	EA	30" Vertical Tee, Vented Bottom, 12" Radius, Steel Cable Tray	1,075.25	416.80
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-72.80*	
26 05 36 00-1896	EA	36" Vertical Tee, Vented Bottom, 12" Radius, Steel Cable Tray	1,207.71	491.81
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-79.78*	

26 05 36 00-1897 24" Radius Vertical Tees *(26 05 36 00-1805)*

26 05 36 00-1898	EA	6" Vertical Tee, Vented Bottom, 24" Radius, Steel Cable Tray	939.75	300.50
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-68.93*	
26 05 36 00-1899	EA	12" Vertical Tee, Vented Bottom, 24" Radius, Steel Cable Tray	1,104.52	386.34
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-78.26*	
26 05 36 00-1900	EA	18" Vertical Tee, Vented Bottom, 24" Radius, Steel Cable Tray	1,177.08	416.80
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-82.98*	
26 05 36 00-1901	EA	24" Vertical Tee, Vented Bottom, 24" Radius, Steel Cable Tray	1,270.87	451.20
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-89.49*	
26 05 36 00-1902	EA	30" Vertical Tee, Vented Bottom, 24" Radius, Steel Cable Tray	1,365.31	491.81
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-95.54*	
26 05 36 00-1903	EA	36" Vertical Tee, Vented Bottom, 24" Radius, Steel Cable Tray	1,595.18	602.13
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-109.34*	

26 05 36 00-1904 36" Radius Vertical Tees *(26 05 36 00-1805)*

26 05 36 00-1905	EA	6" Vertical Tee, Vented Bottom, 36" Radius, Steel Cable Tray	1,261.17	337.72
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-97.97*	
26 05 36 00-1906	EA	12" Vertical Tee, Vented Bottom, 36" Radius, Steel Cable Tray	1,467.26	451.20
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-109.13*	
26 05 36 00-1907	EA	18" Vertical Tee, Vented Bottom, 36" Radius, Steel Cable Tray	1,559.28	491.81
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-114.94*	
26 05 36 00-1908	EA	24" Vertical Tee, Vented Bottom, 36" Radius, Steel Cable Tray	1,691.85	542.34
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-123.99*	
26 05 36 00-1909	EA	30" Vertical Tee, Vented Bottom, 36" Radius, Steel Cable Tray	1,912.80	602.13
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-141.10*	
26 05 36 00-1910	EA	36" Vertical Tee, Vented Bottom, 36" Radius, Steel Cable Tray	2,209.03	772.57
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-156.52*	

26 05 36 00-1911 12" Radius Horizontal Crosses *(26 05 36 00-1805)*

26 05 36 00-1912	EA	6" Horizontal Cross, Vented Bottom, 12" Radius, Steel Cable Tray	816.16	338.40
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-53.42*	
26 05 36 00-1913	EA	12" Horizontal Cross, Vented Bottom, 12" Radius, Steel Cable Tray	899.91	387.13
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-57.73*	
26 05 36 00-1914	EA	18" Horizontal Cross, Vented Bottom, 12" Radius, Steel Cable Tray	1,035.68	451.20
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-65.97*	
26 05 36 00-1915	EA	24" Horizontal Cross, Vented Bottom, 12" Radius, Steel Cable Tray	1,199.19	540.54
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-74.87*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1916	EA	30" Horizontal Cross, Vented Bottom, 12" Radius, Steel Cable Tray	1,334.61	599.99
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-83.46*	
26 05 36 00-1917	EA	36" Horizontal Cross, Vented Bottom, 12" Radius, Steel Cable Tray	1,503.82	676.80
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-93.98*	

26 05 36 00-1918 24" Radius Horizontal Crosses *(26 05 36 00-1805)*

26 05 36 00-1919	EA	6" Horizontal Cross, Vented Bottom, 24" Radius, Steel Cable Tray	1,040.53	387.13
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-71.79*	
26 05 36 00-1920	EA	12" Horizontal Cross, Vented Bottom, 24" Radius, Steel Cable Tray	1,166.61	451.20
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-79.06*	
26 05 36 00-1921	EA	18" Horizontal Cross, Vented Bottom, 24" Radius, Steel Cable Tray	1,356.79	540.54
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-90.63*	
26 05 36 00-1922	EA	24" Horizontal Cross, Vented Bottom, 24" Radius, Steel Cable Tray	1,707.49	676.80
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-114.35*	
26 05 36 00-1923	EA	30" Horizontal Cross, Vented Bottom, 24" Radius, Steel Cable Tray	1,927.77	772.57
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-128.39*	
26 05 36 00-1924	EA	36" Horizontal Cross, Vented Bottom, 24" Radius, Steel Cable Tray	2,178.91	900.03
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-142.89*	

26 05 36 00-1925 36" Radius Horizontal Crosses *(26 05 36 00-1805)*

26 05 36 00-1926	EA	6" Horizontal Cross, Vented Bottom, 36" Radius, Steel Cable Tray	1,418.77	451.20
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-104.28*	
26 05 36 00-1927	EA	12" Horizontal Cross, Vented Bottom, 36" Radius, Steel Cable Tray	1,604.57	542.34
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-115.26*	
26 05 36 00-1928	EA	18" Horizontal Cross, Vented Bottom, 36" Radius, Steel Cable Tray	1,843.26	676.80
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-127.93*	
26 05 36 00-1929	EA	24" Horizontal Cross, Vented Bottom, 36" Radius, Steel Cable Tray	2,368.77	904.77
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-161.48*	
26 05 36 00-1930	EA	30" Horizontal Cross, Vented Bottom, 36" Radius, Steel Cable Tray	2,753.30	1,084.58
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-184.95*	
26 05 36 00-1931	EA	36" Horizontal Cross, Vented Bottom, 36" Radius, Steel Cable Tray	3,274.35	1,353.61
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-214.63*	

26 05 36 00-1932 Straight Reducers *(26 05 36 00-1805)*

26 05 36 00-1933	EA	12" To 6" Reducer, Vented Bottom, Steel Cable Tray	314.54	115.28
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-21.85*	
26 05 36 00-1934	EA	18" To 12" Reducer, Vented Bottom, Steel Cable Tray	341.90	128.82
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-23.46*	
26 05 36 00-1935	EA	24" To 18" Reducer, Vented Bottom, Steel Cable Tray	386.01	150.14
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-26.09*	
26 05 36 00-1936	EA	30" To 24" Reducer, Vented Bottom, Steel Cable Tray	422.63	169.20
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-28.16*	
26 05 36 00-1937	EA	36" To 30" Reducer, Vented Bottom, Steel Cable Tray	460.91	186.34
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-30.56*	

26 05 36 00-1938 Reducers *(26 05 36 00-1805)*

26 05 36 00-1939	EA	18" To 6" Reducer, Vented Bottom, Steel Cable Tray	341.90	128.82
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-23.46*	
26 05 36 00-1940	EA	24" To 12" Reducer, Vented Bottom, Steel Cable Tray	384.02	150.37
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-25.87*	
26 05 36 00-1941	EA	30" To 12" Reducer, Vented Bottom, Steel Cable Tray	419.92	168.97
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-27.91*	
26 05 36 00-1942	EA	30" To 18" Reducer, Vented Bottom, Steel Cable Tray	422.07	168.86
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-28.14*	
26 05 36 00-1943	EA	36" To 12" Reducer, Vented Bottom, Steel Cable Tray	458.48	186.34
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-30.32*	
26 05 36 00-1944	EA	36" To 18" Reducer, Vented Bottom, Steel Cable Tray	460.91	186.34
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-30.56*	
26 05 36 00-1945	EA	36" To 24" Reducer, Vented Bottom, Steel Cable Tray	464.01	186.79
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-30.84*	

26 05 36 00-1946 Dropout Or End Plate *(26 05 36 00-1805)*

26 05 36 00-1947	EA	6" Dropout Or End Plate, Vented Bottom, Steel Cable Tray	98.59	41.62
26 05 36 00-1948	EA	12" Dropout Or End Plate, Vented Bottom, Steel Cable Tray	117.10	48.85
26 05 36 00-1949	EA	18" Dropout Or End Plate, Vented Bottom, Steel Cable Tray	129.02	53.92
26 05 36 00-1950	EA	24" Dropout Or End Plate, Vented Bottom, Steel Cable Tray	145.27	60.12
26 05 36 00-1951	EA	30" Dropout Or End Plate, Vented Bottom, Steel Cable Tray	160.92	67.57
26 05 36 00-1952	EA	36" Dropout Or End Plate, Vented Bottom, Steel Cable Tray	188.01	80.76

26 05 36 00-1953 Vented Bottom Aluminum Cable Tray *(26 05 36 00-1797)*

26 05 36 00-1954	LF	6" Vented Bottom Aluminum Cable Tray, Straight Section	39.47	8.80
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-3.21*	
26 05 36 00-1955	LF	9" Vented Bottom Aluminum Cable Tray, Straight Section	43.86	9.70
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-3.58*	
26 05 36 00-1956	LF	12" Vented Bottom Aluminum Cable Tray, Straight Section	49.07	10.83
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-4.01*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1957	LF	18" Vented Bottom Aluminum Cable Tray, Straight Section	57.37	12.07
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-4.73*	
26 05 36 00-1958	LF	24" Vented Bottom Aluminum Cable Tray, Straight Section	66.06	13.42
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-5.49*	
26 05 36 00-1959	LF	30" Vented Bottom Aluminum Cable Tray, Straight Section	84.57	15.46
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-7.17*	
26 05 36 00-1960	LF	36" Vented Bottom Aluminum Cable Tray, Straight Section	93.71	18.16
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-7.86*	

26 05 36 00-1961 Vented Bottom Aluminum Cable Tray Fittings *(26 05 36 00-1797)*

26 05 36 00-1962 90 Degree, 12" Radius Horizontal Elbows *(26 05 36 00-1961)*

26 05 36 00-1963	EA	6" Horizontal 90 Degree Elbow, Vented Bottom, 12" Radius, Aluminum Cable Tray	438.61	142.58
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-31.98*	
26 05 36 00-1964	EA	9" Horizontal 90 Degree Elbow, Vented Bottom, 12" Radius, Aluminum Cable Tray	476.51	154.76
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-34.75*	
26 05 36 00-1965	EA	12" Horizontal 90 Degree Elbow, Vented Bottom, 12" Radius, Aluminum Cable Tray	523.50	174.27
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-37.83*	
26 05 36 00-1966	EA	18" Horizontal 90 Degree Elbow, Vented Bottom, 12" Radius, Aluminum Cable Tray	592.87	193.12
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-43.19*	
26 05 36 00-1967	EA	24" Horizontal 90 Degree Elbow, Vented Bottom, 12" Radius, Aluminum Cable Tray	707.41	235.64
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-51.10*	
26 05 36 00-1968	EA	30" Horizontal 90 Degree Elbow, Vented Bottom, 12" Radius, Aluminum Cable Tray	839.42	271.17
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-61.35*	
26 05 36 00-1969	EA	36" Horizontal 90 Degree Elbow, Vented Bottom, 12" Radius, Aluminum Cable Tray	924.23	301.07
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-67.33*	

26 05 36 00-1970 90 Degree, 24" Radius Horizontal Elbows *(26 05 36 00-1961)*

26 05 36 00-1971	EA	6" Horizontal 90 Degree Elbow, Vented Bottom, 24" Radius, Aluminum Cable Tray	541.80	150.25
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-41.66*	
26 05 36 00-1972	EA	12" Horizontal 90 Degree Elbow, Vented Bottom, 24" Radius, Aluminum Cable Tray	652.13	186.79
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-49.65*	
26 05 36 00-1973	EA	18" Horizontal 90 Degree Elbow, Vented Bottom, 24" Radius, Aluminum Cable Tray	740.62	208.35
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-56.70*	
26 05 36 00-1974	EA	24" Horizontal 90 Degree Elbow, Vented Bottom, 24" Radius, Aluminum Cable Tray	877.89	257.52
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-66.33*	
26 05 36 00-1975	EA	30" Horizontal 90 Degree Elbow, Vented Bottom, 24" Radius, Aluminum Cable Tray	1,012.77	300.05
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-76.28*	
26 05 36 00-1976	EA	36" Horizontal 90 Degree Elbow, Vented Bottom, 24" Radius, Aluminum Cable Tray	1,117.56	338.40
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-83.56*	

26 05 36 00-1977 90 Degree, 36" Radius Horizontal Elbows *(26 05 36 00-1961)*

26 05 36 00-1978	EA	6" Horizontal 90 Degree Elbow, Vented Bottom, 36" Radius, Aluminum Cable Tray	675.59	158.83
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-54.32*	
26 05 36 00-1979	EA	12" Horizontal 90 Degree Elbow, Vented Bottom, 36" Radius, Aluminum Cable Tray	803.60	200.67
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-63.63*	
26 05 36 00-1980	EA	18" Horizontal 90 Degree Elbow, Vented Bottom, 36" Radius, Aluminum Cable Tray	909.67	225.94
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-72.14*	
26 05 36 00-1981	EA	24" Horizontal 90 Degree Elbow, Vented Bottom, 36" Radius, Aluminum Cable Tray	1,057.44	284.82
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-82.01*	
26 05 36 00-1982	EA	30" Horizontal 90 Degree Elbow, Vented Bottom, 36" Radius, Aluminum Cable Tray	1,144.69	276.03
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-91.47*	
26 05 36 00-1983	EA	36" Horizontal 90 Degree Elbow, Vented Bottom, 36" Radius, Aluminum Cable Tray	1,386.77	386.34
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-106.49*	

26 05 36 00-1984 45 Degree, 12" Radius Horizontal Elbows *(26 05 36 00-1961)*

26 05 36 00-1985	EA	6" Horizontal 45 Degree Elbow, Vented Bottom, 12" Radius, Aluminum Cable Tray	394.58	142.69
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-27.57*	
26 05 36 00-1986	EA	9" Horizontal 45 Degree Elbow, Vented Bottom, 12" Radius, Aluminum Cable Tray	428.68	154.99
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-29.96*	
26 05 36 00-1987	EA	12" Horizontal 45 Degree Elbow, Vented Bottom, 12" Radius, Aluminum Cable Tray	472.22	174.27
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-32.70*	
26 05 36 00-1988	EA	18" Horizontal 45 Degree Elbow, Vented Bottom, 12" Radius, Aluminum Cable Tray	532.89	192.89
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-37.21*	
26 05 36 00-1989	EA	24" Horizontal 45 Degree Elbow, Vented Bottom, 12" Radius, Aluminum Cable Tray	637.64	235.30
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-44.15*	
26 05 36 00-1990	EA	30" Horizontal 45 Degree Elbow, Vented Bottom, 12" Radius, Aluminum Cable Tray	754.17	271.17
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-52.82*	
26 05 36 00-1991	EA	36" Horizontal 45 Degree Elbow, Vented Bottom, 12" Radius, Aluminum Cable Tray	830.40	300.50
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-58.00*	

26 05 36 00-1992 45 Degree, 24" Radius Horizontal Elbows *(26 05 36 00-1961)*

26 05 36 00-1993	EA	6" Horizontal 45 Degree Elbow, Vented Bottom, 24" Radius, Aluminum Cable Tray	477.92	150.37
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-35.26*	
26 05 36 00-1994	EA	12" Horizontal 45 Degree Elbow, Vented Bottom, 24" Radius, Aluminum Cable Tray	577.14	186.79
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-42.15*	
26 05 36 00-1995	EA	18" Horizontal 45 Degree Elbow, Vented Bottom, 24" Radius, Aluminum Cable Tray	654.51	208.68
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-48.07*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-1996	EA	24" Horizontal 45 Degree Elbow, Vented Bottom, 24" Radius, Aluminum Cable Tray	779.84	257.97
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-56.49*	
26 05 36 00-1997	EA	30" Horizontal 45 Degree Elbow, Vented Bottom, 24" Radius, Aluminum Cable Tray	901.74	301.07
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-65.09*	
26 05 36 00-1998	EA	36" Horizontal 45 Degree Elbow, Vented Bottom, 24" Radius, Aluminum Cable Tray	995.77	338.40
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-71.38*	

26 05 36 00-1999 45 Degree, 36" Radius Horizontal Elbows *(26 05 36 00-1961)*

26 05 36 00-2000	EA	6" Horizontal 45 Degree Elbow, Vented Bottom, 36" Radius, Aluminum Cable Tray	585.71	159.16
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-45.31*	
26 05 36 00-2001	EA	12" Horizontal 45 Degree Elbow, Vented Bottom, 36" Radius, Aluminum Cable Tray	699.60	200.22
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-53.27*	
26 05 36 00-2002	EA	18" Horizontal 45 Degree Elbow, Vented Bottom, 36" Radius, Aluminum Cable Tray	792.38	225.94
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-60.41*	
26 05 36 00-2003	EA	24" Horizontal 45 Degree Elbow, Vented Bottom, 36" Radius, Aluminum Cable Tray	930.05	285.39
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-69.23*	
26 05 36 00-2004	EA	30" Horizontal 45 Degree Elbow, Vented Bottom, 36" Radius, Aluminum Cable Tray	1,065.11	318.66
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-79.96*	
26 05 36 00-2005	EA	36" Horizontal 45 Degree Elbow, Vented Bottom, 36" Radius, Aluminum Cable Tray	1,224.81	387.13
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-90.22*	

26 05 36 00-2006 90 Degree, 12" Radius Vertical Risers *(26 05 36 00-1961)*

26 05 36 00-2007	EA	6" Vertical Riser 90 Degree, Vented Bottom, 12" Radius, Aluminum Cable Tray	481.70	142.13
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-36.32*	
26 05 36 00-2008	EA	9" Vertical Riser 90 Degree, Vented Bottom, 12" Radius, Aluminum Cable Tray	516.60	154.43
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-38.80*	
26 05 36 00-2009	EA	12" Vertical Riser 90 Degree, Vented Bottom, 12" Radius, Aluminum Cable Tray	552.63	174.27
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-40.74*	
26 05 36 00-2010	EA	18" Vertical Riser 90 Degree, Vented Bottom, 12" Radius, Aluminum Cable Tray	592.87	193.12
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-43.19*	
26 05 36 00-2011	EA	24" Vertical Riser 90 Degree, Vented Bottom, 12" Radius, Aluminum Cable Tray	692.85	235.64
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-49.65*	
26 05 36 00-2012	EA	30" Vertical Riser 90 Degree, Vented Bottom, 12" Radius, Aluminum Cable Tray	766.58	271.17
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-54.06*	
26 05 36 00-2013	EA	36" Vertical Riser 90 Degree, Vented Bottom, 12" Radius, Aluminum Cable Tray	818.46	300.50
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-56.80*	

26 05 36 00-2014 90 Degree, 24" Radius Vertical Risers *(26 05 36 00-1961)*

26 05 36 00-2015	EA	6" Vertical Riser 90 Degree, Vented Bottom, 24" Radius, Aluminum Cable Tray	579.67	150.25
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-45.44*	
26 05 36 00-2016	EA	12" Vertical Riser 90 Degree, Vented Bottom, 24" Radius, Aluminum Cable Tray	669.62	186.79
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-51.40*	
26 05 36 00-2017	EA	18" Vertical Riser 90 Degree, Vented Bottom, 24" Radius, Aluminum Cable Tray	737.70	208.35
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-56.41*	
26 05 36 00-2018	EA	24" Vertical Riser 90 Degree, Vented Bottom, 24" Radius, Aluminum Cable Tray	826.11	257.97
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-61.12*	
26 05 36 00-2019	EA	30" Vertical Riser 90 Degree, Vented Bottom, 24" Radius, Aluminum Cable Tray	917.51	300.50
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-66.71*	
26 05 36 00-2020	EA	36" Vertical Riser 90 Degree, Vented Bottom, 24" Radius, Aluminum Cable Tray	1,001.02	338.40
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-71.90*	

26 05 36 00-2021 90 Degree, 36" Radius Vertical Risers *(26 05 36 00-1961)*

26 05 36 00-2022	EA	6" Vertical Riser 90 Degree, Vented Bottom, 36" Radius, Aluminum Cable Tray	672.67	158.83
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-54.03*	
26 05 36 00-2023	EA	12" Vertical Riser 90 Degree, Vented Bottom, 36" Radius, Aluminum Cable Tray	771.55	200.67
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-60.43*	
26 05 36 00-2024	EA	18" Vertical Riser 90 Degree, Vented Bottom, 36" Radius, Aluminum Cable Tray	865.97	225.94
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-67.77*	
26 05 36 00-2025	EA	24" Vertical Riser 90 Degree, Vented Bottom, 36" Radius, Aluminum Cable Tray	1,005.00	284.82
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-76.76*	
26 05 36 00-2026	EA	30" Vertical Riser 90 Degree, Vented Bottom, 36" Radius, Aluminum Cable Tray	1,113.76	318.66
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-84.82*	
26 05 36 00-2027	EA	36" Vertical Riser 90 Degree, Vented Bottom, 36" Radius, Aluminum Cable Tray	1,244.01	386.34
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-92.21*	

26 05 36 00-2028 12" Radius Horizontal Tees *(26 05 36 00-1961)*

26 05 36 00-2029	EA	6" Horizontal Tee, Vented Bottom, 12" Radius, Aluminum Cable Tray	757.11	270.72
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-53.15*	
26 05 36 00-2030	EA	9" Horizontal Tee, Vented Bottom, 12" Radius, Aluminum Cable Tray	789.40	284.82
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-55.20*	
26 05 36 00-2031	EA	12" Horizontal Tee, Vented Bottom, 12" Radius, Aluminum Cable Tray	840.87	300.05
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-59.09*	
26 05 36 00-2032	EA	18" Horizontal Tee, Vented Bottom, 12" Radius, Aluminum Cable Tray	961.36	339.08
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-67.88*	
26 05 36 00-2033	EA	24" Horizontal Tee, Vented Bottom, 12" Radius, Aluminum Cable Tray	1,098.34	386.34
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-77.64*	
26 05 36 00-2034	EA	30" Horizontal Tee, Vented Bottom, 12" Radius, Aluminum Cable Tray	1,238.55	451.20
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-86.26*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-2035	EA	36" Horizontal Tee, Vented Bottom, 12" Radius, Aluminum Cable Tray	1,373.33	491.81
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-96.34*	
26 05 36 00-2036		**24" Radius Horizontal Tees** *(26 05 36 00-1961)*		
26 05 36 00-2037	EA	6" Horizontal Tee, Vented Bottom, 24" Radius, Aluminum Cable Tray	967.04	300.50
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-71.66*	
26 05 36 00-2038	EA	12" Horizontal Tee, Vented Bottom, 24" Radius, Aluminum Cable Tray	1,093.13	337.72
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-81.17*	
26 05 36 00-2039	EA	18" Horizontal Tee, Vented Bottom, 24" Radius, Aluminum Cable Tray	1,226.53	386.34
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-90.46*	
26 05 36 00-2040	EA	24" Horizontal Tee, Vented Bottom, 24" Radius, Aluminum Cable Tray	1,478.36	449.96
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-110.34*	
26 05 36 00-2041	EA	30" Horizontal Tee, Vented Bottom, 24" Radius, Aluminum Cable Tray	1,690.48	542.34
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-123.86*	
26 05 36 00-2042	EA	36" Horizontal Tee, Vented Bottom, 24" Radius, Aluminum Cable Tray	1,921.31	602.13
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-141.95*	
26 05 36 00-2043		**36" Radius Horizontal Tees** *(26 05 36 00-1961)*		
26 05 36 00-2044	EA	6" Horizontal Tee, Vented Bottom, 36" Radius, Aluminum Cable Tray	1,312.76	338.40
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-103.08*	
26 05 36 00-2045	EA	12" Horizontal Tee, Vented Bottom, 36" Radius, Aluminum Cable Tray	1,503.31	386.34
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-118.14*	
26 05 36 00-2046	EA	18" Horizontal Tee, Vented Bottom, 36" Radius, Aluminum Cable Tray	1,604.07	376.87
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-129.00*	
26 05 36 00-2047	EA	24" Horizontal Tee, Vented Bottom, 36" Radius, Aluminum Cable Tray	2,037.21	540.54
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-158.67*	
26 05 36 00-2048	EA	30" Horizontal Tee, Vented Bottom, 36" Radius, Aluminum Cable Tray	2,341.62	679.51
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-177.54*	
26 05 36 00-2049	EA	36" Horizontal Tee, Vented Bottom, 36" Radius, Aluminum Cable Tray	2,686.13	772.57
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-204.23*	
26 05 36 00-2050		**12" Radius Vertical Tees** *(26 05 36 00-1961)*		
26 05 36 00-2051	EA	6" Vertical Tee, Vented Bottom, 12" Radius, Aluminum Cable Tray	870.74	270.72
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-64.51*	
26 05 36 00-2052	EA	9" Vertical Tee, Vented Bottom, 12" Radius, Aluminum Cable Tray	897.20	284.82
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-65.98*	
26 05 36 00-2053	EA	12" Vertical Tee, Vented Bottom, 12" Radius, Aluminum Cable Tray	955.39	300.50
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-70.49*	
26 05 36 00-2054	EA	18" Vertical Tee, Vented Bottom, 12" Radius, Aluminum Cable Tray	988.48	318.66
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-72.29*	
26 05 36 00-2055	EA	24" Vertical Tee, Vented Bottom, 12" Radius, Aluminum Cable Tray	1,031.95	337.72
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-75.05*	
26 05 36 00-2056	EA	30" Vertical Tee, Vented Bottom, 12" Radius, Aluminum Cable Tray	1,090.74	360.74
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-79.01*	
26 05 36 00-2057	EA	36" Vertical Tee, Vented Bottom, 12" Radius, Aluminum Cable Tray	1,202.74	415.67
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-85.63*	
26 05 36 00-2058		**24" Radius Vertical Tees** *(26 05 36 00-1961)*		
26 05 36 00-2059	EA	6" Vertical Tee, Vented Bottom, 24" Radius, Aluminum Cable Tray	1,095.24	300.50
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-84.48*	
26 05 36 00-2060	EA	12" Vertical Tee, Vented Bottom, 24" Radius, Aluminum Cable Tray	1,203.84	337.72
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-92.24*	
26 05 36 00-2061	EA	18" Vertical Tee, Vented Bottom, 24" Radius, Aluminum Cable Tray	1,285.94	360.74
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-98.53*	
26 05 36 00-2062	EA	24" Vertical Tee, Vented Bottom, 24" Radius, Aluminum Cable Tray	1,372.20	386.34
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-105.03*	
26 05 36 00-2063	EA	30" Vertical Tee, Vented Bottom, 24" Radius, Aluminum Cable Tray	1,479.51	415.67
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-113.31*	
26 05 36 00-2064	EA	36" Vertical Tee, Vented Bottom, 24" Radius, Aluminum Cable Tray	1,623.37	493.27
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-121.23*	
26 05 36 00-2065		**36" Radius Vertical Tees** *(26 05 36 00-1961)*		
26 05 36 00-2066	EA	6" Vertical Tee, Vented Bottom, 36" Radius, Aluminum Cable Tray	1,480.62	337.72
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-119.92*	
26 05 36 00-2067	EA	12" Vertical Tee, Vented Bottom, 36" Radius, Aluminum Cable Tray	1,619.85	386.34
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-129.79*	
26 05 36 00-2068	EA	18" Vertical Tee, Vented Bottom, 36" Radius, Aluminum Cable Tray	1,698.02	415.67
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-135.16*	
26 05 36 00-2069	EA	24" Vertical Tee, Vented Bottom, 36" Radius, Aluminum Cable Tray	1,831.99	452.45
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-145.50*	
26 05 36 00-2070	EA	30" Vertical Tee, Vented Bottom, 36" Radius, Aluminum Cable Tray	1,987.55	493.27
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-157.65*	
26 05 36 00-2071	EA	36" Vertical Tee, Vented Bottom, 36" Radius, Aluminum Cable Tray	2,223.66	599.99
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-172.37*	
26 05 36 00-2072		**12" Radius Horizontal Crosses** *(26 05 36 00-1961)*		

copyright 2026 The Gordian Group, Inc.

	MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-2073		EA	6" Horizontal Cross, Vented Bottom, 12" Radius, Aluminum Cable Tray	882.55	300.50
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-63.21*	
26 05 36 00-2074		EA	9" Horizontal Cross, Vented Bottom, 12" Radius, Aluminum Cable Tray	938.95	318.66
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-67.34*	
26 05 36 00-2075		EA	12" Horizontal Cross, Vented Bottom, 12" Radius, Aluminum Cable Tray	984.67	339.08
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-70.21*	
26 05 36 00-2076		EA	18" Horizontal Cross, Vented Bottom, 12" Radius, Aluminum Cable Tray	1,083.77	386.34
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-76.19*	
26 05 36 00-2077		EA	24" Horizontal Cross, Vented Bottom, 12" Radius, Aluminum Cable Tray	1,239.46	449.96
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-86.45*	
26 05 36 00-2078		EA	30" Horizontal Cross, Vented Bottom, 12" Radius, Aluminum Cable Tray	1,411.74	490.46
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-100.30*	
26 05 36 00-2079		EA	36" Horizontal Cross, Vented Bottom, 12" Radius, Aluminum Cable Tray	1,720.28	602.13
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-121.85*	

26 05 36 00-2080 24" Radius Horizontal Crosses *(26 05 36 00-1961)*

26 05 36 00-2081		EA	6" Horizontal Cross, Vented Bottom, 24" Radius, Aluminum Cable Tray	1,249.79	339.08
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-96.72*	
26 05 36 00-2082		EA	12" Horizontal Cross, Vented Bottom, 24" Radius, Aluminum Cable Tray	1,392.60	386.34
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-107.07*	
26 05 36 00-2083		EA	18" Horizontal Cross, Vented Bottom, 24" Radius, Aluminum Cable Tray	1,557.03	449.96
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-118.20*	
26 05 36 00-2084		EA	24" Horizontal Cross, Vented Bottom, 24" Radius, Aluminum Cable Tray	1,833.27	540.54
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-138.28*	
26 05 36 00-2085		EA	30" Horizontal Cross, Vented Bottom, 24" Radius, Aluminum Cable Tray	2,005.15	599.99
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-150.51*	
26 05 36 00-2086		EA	36" Horizontal Cross, Vented Bottom, 24" Radius, Aluminum Cable Tray	2,423.92	772.57
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-178.01*	

26 05 36 00-2087 36" Radius Horizontal Crosses *(26 05 36 00-1961)*

26 05 36 00-2088		EA	6" Horizontal Cross, Vented Bottom, 36" Radius, Aluminum Cable Tray	1,765.52	386.34
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-144.36*	
26 05 36 00-2089		EA	12" Horizontal Cross, Vented Bottom, 36" Radius, Aluminum Cable Tray	1,948.53	452.45
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-157.15*	
26 05 36 00-2090		EA	18" Horizontal Cross, Vented Bottom, 36" Radius, Aluminum Cable Tray	2,197.45	540.54
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-174.70*	
26 05 36 00-2091		EA	24" Horizontal Cross, Vented Bottom, 36" Radius, Aluminum Cable Tray	2,632.96	679.51
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-206.67*	
26 05 36 00-2092		EA	30" Horizontal Cross, Vented Bottom, 36" Radius, Aluminum Cable Tray	2,925.13	776.18
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-227.83*	
26 05 36 00-2093		EA	36" Horizontal Cross, Vented Bottom, 36" Radius, Aluminum Cable Tray	3,393.76	900.03
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-264.38*	

26 05 36 00-2094 Straight Reducers *(26 05 36 00-1961)*

26 05 36 00-2095		EA	9" To 6" Reducer, Vented Bottom, Aluminum Cable Tray	336.94	90.24
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-26.17*	
26 05 36 00-2096		EA	12" To 9" Reducer, Vented Bottom, Aluminum Cable Tray	353.63	95.09
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-27.44*	
26 05 36 00-2097		EA	18" To 12" Reducer, Vented Bottom, Aluminum Cable Tray	397.65	112.69
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-30.37*	
26 05 36 00-2098		EA	24" To 18" Reducer, Vented Bottom, Aluminum Cable Tray	438.79	128.71
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-33.16*	
26 05 36 00-2099		EA	30" To 24" Reducer, Vented Bottom, Aluminum Cable Tray	480.83	150.37
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-35.55*	
26 05 36 00-2100		EA	36" To 30" Reducer, Vented Bottom, Aluminum Cable Tray	520.34	168.86
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-37.96*	

26 05 36 00-2101 Reducers *(26 05 36 00-1961)*

26 05 36 00-2102		EA	12" To 6" Reducer, Vented Bottom, Aluminum Cable Tray	353.36	94.87
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-27.43*	
26 05 36 00-2103		EA	18" To 6" Reducer, Vented Bottom, Aluminum Cable Tray	397.52	112.69
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-30.36*	
26 05 36 00-2104		EA	18" To 9" Reducer, Vented Bottom, Aluminum Cable Tray	397.52	112.69
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-30.36*	
26 05 36 00-2105		EA	24" To 6" Reducer, Vented Bottom, Aluminum Cable Tray	438.95	128.82
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-33.16*	
26 05 36 00-2106		EA	24" To 9" Reducer, Vented Bottom, Aluminum Cable Tray	438.95	128.82
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-33.16*	
26 05 36 00-2107		EA	24" To 12" Reducer, Vented Bottom, Aluminum Cable Tray	439.28	128.93
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-33.18*	
26 05 36 00-2108		EA	30" To 12" Reducer, Vented Bottom, Aluminum Cable Tray	486.44	150.25
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-36.12*	
26 05 36 00-2109		EA	30" To 18" Reducer, Vented Bottom, Aluminum Cable Tray	480.39	150.14
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-35.53*	
26 05 36 00-2110		EA	36" To 12" Reducer, Vented Bottom, Aluminum Cable Tray	520.34	168.86
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-37.96*	
26 05 36 00-2111		EA	36" To 18" Reducer, Vented Bottom, Aluminum Cable Tray	520.34	168.86
			For 4-5/8" Overall Height Instead Of 6", Deduct	*-37.96*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-2112	EA	36" To 24" Reducer, Vented Bottom, Aluminum Cable Tray	520.90	169.20
		For 4-5/8" Overall Height Instead Of 6", Deduct	*-37.99*	
26 05 36 00-2113		**Dropout Or End Plate** *(26 05 36 00-1961)*		
26 05 36 00-2114	EA	6" Dropout Or End Plate, Vented Bottom, Aluminum Cable Tray	107.54	41.62
26 05 36 00-2115	EA	9" Dropout Or End Plate, Vented Bottom, Aluminum Cable Tray	117.34	45.46
26 05 36 00-2116	EA	12" Dropout Or End Plate, Vented Bottom, Aluminum Cable Tray	126.50	48.85
26 05 36 00-2117	EA	18" Dropout Or End Plate, Vented Bottom, Aluminum Cable Tray	144.20	53.92
26 05 36 00-2118	EA	24" Dropout Or End Plate, Vented Bottom, Aluminum Cable Tray	165.84	60.12
26 05 36 00-2119	EA	30" Dropout Or End Plate, Vented Bottom, Aluminum Cable Tray	182.59	67.57
26 05 36 00-2120	EA	36" Dropout Or End Plate, Vented Bottom, Aluminum Cable Tray	209.07	77.38
26 05 36 00-2121		**Cable Tray Covers And Dividers** *(26 05 36 00-0001)*		
26 05 36 00-2122		**Galvanized Steel Covers** *(26 05 36 00-2121)*		
26 05 36 00-2123		**Ventilated Straight Sections** *(26 05 36 00-2122)*		
26 05 36 00-2124	LF	6" Steel Cable Tray Cover, Straight Section	11.08	2.03
26 05 36 00-2125	LF	9" Steel Cable Tray Cover, Straight Section	13.41	2.37
26 05 36 00-2126	LF	12" Steel Cable Tray Cover, Straight Section	15.77	2.71
26 05 36 00-2127	LF	18" Steel Cable Tray Cover, Straight Section	21.41	3.61
26 05 36 00-2128	LF	24" Steel Cable Tray Cover, Straight Section	27.05	4.85
26 05 36 00-2129	LF	30" Steel Cable Tray Cover, Straight Section	32.79	5.97
26 05 36 00-2130	LF	36" Steel Cable Tray Cover, Straight Section	139.09	67.79
26 05 36 00-2131		**90 Degree, 12" Radius Horizontal Elbows** *(26 05 36 00-2122)*		
26 05 36 00-2132	EA	6" Horizontal 90 Degree Elbow, 12" Radius, Steel Cable Tray Cover	69.06	7.22
26 05 36 00-2133	EA	9" Horizontal 90 Degree Elbow, 12" Radius, Steel Cable Tray Cover	77.14	8.46
26 05 36 00-2134	EA	12" Horizontal 90 Degree Elbow, 12" Radius, Steel Cable Tray Cover	83.34	10.04
26 05 36 00-2135	EA	18" Horizontal 90 Degree Elbow, 12" Radius, Steel Cable Tray Cover	113.56	12.86
26 05 36 00-2136	EA	24" Horizontal 90 Degree Elbow, 12" Radius, Steel Cable Tray Cover	138.85	16.36
26 05 36 00-2137	EA	30" Horizontal 90 Degree Elbow, 12" Radius, Steel Cable Tray Cover	168.37	18.16
26 05 36 00-2138	EA	36" Horizontal 90 Degree Elbow, 12" Radius, Steel Cable Tray Cover	203.44	21.66
26 05 36 00-2139		**90 Degree, 24" Radius Horizontal Elbows** *(26 05 36 00-2122)*		
26 05 36 00-2140	EA	6" Horizontal 90 Degree Elbow, 24" Radius, Steel Cable Tray Cover	107.86	8.01
26 05 36 00-2141	EA	9" Horizontal 90 Degree Elbow, 24" Radius, Steel Cable Tray Cover	112.55	9.36
26 05 36 00-2142	EA	12" Horizontal 90 Degree Elbow, 24" Radius, Steel Cable Tray Cover	126.74	11.28
26 05 36 00-2143	EA	18" Horizontal 90 Degree Elbow, 24" Radius, Steel Cable Tray Cover	157.15	14.32
26 05 36 00-2144	EA	24" Horizontal 90 Degree Elbow, 24" Radius, Steel Cable Tray Cover	192.57	18.05
26 05 36 00-2145	EA	30" Horizontal 90 Degree Elbow, 24" Radius, Steel Cable Tray Cover	248.05	20.76
26 05 36 00-2146	EA	36" Horizontal 90 Degree Elbow, 24" Radius, Steel Cable Tray Cover	288.37	24.59
26 05 36 00-2147		**90 Degree, 36" Radius Horizontal Elbows** *(26 05 36 00-2122)*		
26 05 36 00-2148	EA	6" Horizontal 90 Degree Elbow, 36" Radius, Steel Cable Tray Cover	153.17	9.02
26 05 36 00-2149	EA	9" Horizontal 90 Degree Elbow, 36" Radius, Steel Cable Tray Cover	170.12	10.37
26 05 36 00-2150	EA	12" Horizontal 90 Degree Elbow, 36" Radius, Steel Cable Tray Cover	183.91	12.86
26 05 36 00-2151	EA	18" Horizontal 90 Degree Elbow, 36" Radius, Steel Cable Tray Cover	233.59	15.01
26 05 36 00-2152	EA	24" Horizontal 90 Degree Elbow, 36" Radius, Steel Cable Tray Cover	282.01	20.87
26 05 36 00-2153	EA	30" Horizontal 90 Degree Elbow, 36" Radius, Steel Cable Tray Cover	332.63	23.58
26 05 36 00-2154	EA	36" Horizontal 90 Degree Elbow, 36" Radius, Steel Cable Tray Cover	389.35	27.07
26 05 36 00-2155		**45 Degree, 12" Radius Horizontal Elbows** *(26 05 36 00-2122)*		
26 05 36 00-2156	EA	6" Horizontal 45 Degree Elbow, 12" Radius, Steel Cable Tray Cover	52.58	7.22
		For 60 Degree Bend, Deduct	*-14.57*	
		For 30 Degree Bend, Deduct	*-24.69*	
26 05 36 00-2157	EA	9" Horizontal 45 Degree Elbow, 12" Radius, Steel Cable Tray Cover	62.59	8.46
		For 60 Degree Bend, Deduct	*-17.41*	
		For 30 Degree Bend, Deduct	*-29.49*	
26 05 36 00-2158	EA	12" Horizontal 45 Degree Elbow, 12" Radius, Steel Cable Tray Cover	70.00	10.04
		For 60 Degree Bend, Deduct	*-19.27*	
		For 30 Degree Bend, Deduct	*-32.67*	
26 05 36 00-2159	EA	18" Horizontal 45 Degree Elbow, 12" Radius, Steel Cable Tray Cover	84.74	12.30
		For 60 Degree Bend, Deduct	*-23.25*	
		For 30 Degree Bend, Deduct	*-39.44*	
26 05 36 00-2160	EA	24" Horizontal 45 Degree Elbow, 12" Radius, Steel Cable Tray Cover	98.94	14.21
		For 60 Degree Bend, Deduct	*-27.18*	
		For 30 Degree Bend, Deduct	*-46.09*	
26 05 36 00-2161	EA	30" Horizontal 45 Degree Elbow, 12" Radius, Steel Cable Tray Cover	115.86	16.36
		For 60 Degree Bend, Deduct	*-31.94*	
		For 30 Degree Bend, Deduct	*-54.15*	
26 05 36 00-2162	EA	36" Horizontal 45 Degree Elbow, 12" Radius, Steel Cable Tray Cover	129.50	18.05
		For 60 Degree Bend, Deduct	*-35.81*	
		For 30 Degree Bend, Deduct	*-60.69*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-2163		**45 Degree, 24" Radius Horizontal Elbows** *(26 05 36 00-2122)*		
26 05 36 00-2164	EA	6" Horizontal 45 Degree Elbow, 24" Radius, Steel Cable Tray Cover	72.71	8.01
		For 60 Degree Bend, Deduct	*-20.93*	
		For 30 Degree Bend, Deduct	*-35.33*	
26 05 36 00-2165	EA	9" Horizontal 45 Degree Elbow, 24" Radius, Steel Cable Tray Cover	82.25	9.36
		For 60 Degree Bend, Deduct	*-23.56*	
		For 30 Degree Bend, Deduct	*-39.79*	
26 05 36 00-2166	EA	12" Horizontal 45 Degree Elbow, 24" Radius, Steel Cable Tray Cover	94.00	11.28
		For 60 Degree Bend, Deduct	*-26.69*	
		For 30 Degree Bend, Deduct	*-45.11*	
26 05 36 00-2167	EA	18" Horizontal 45 Degree Elbow, 24" Radius, Steel Cable Tray Cover	108.66	13.53
		For 60 Degree Bend, Deduct	*-30.66*	
		For 30 Degree Bend, Deduct	*-51.86*	
26 05 36 00-2168	EA	24" Horizontal 45 Degree Elbow, 24" Radius, Steel Cable Tray Cover	125.24	15.46
		For 60 Degree Bend, Deduct	*-35.39*	
		For 30 Degree Bend, Deduct	*-59.84*	
26 05 36 00-2169	EA	30" Horizontal 45 Degree Elbow, 24" Radius, Steel Cable Tray Cover	156.23	18.05
		For 60 Degree Bend, Deduct	*-44.62*	
		For 30 Degree Bend, Deduct	*-75.37*	
26 05 36 00-2170	EA	36" Horizontal 45 Degree Elbow, 24" Radius, Steel Cable Tray Cover	172.94	20.87
		For 60 Degree Bend, Deduct	*-49.08*	
		For 30 Degree Bend, Deduct	*-82.96*	
26 05 36 00-2171		**45 Degree, 36" Radius Horizontal Elbows** *(26 05 36 00-2122)*		
26 05 36 00-2172	EA	6" Horizontal 45 Degree Elbow, 36" Radius, Steel Cable Tray Cover	101.07	9.02
		For 60 Degree Bend, Deduct	*-29.90*	
		For 30 Degree Bend, Deduct	*-50.34*	
26 05 36 00-2173	EA	9" Horizontal 45 Degree Elbow, 36" Radius, Steel Cable Tray Cover	114.35	10.37
		For 60 Degree Bend, Deduct	*-33.74*	
		For 30 Degree Bend, Deduct	*-56.81*	
26 05 36 00-2174	EA	12" Horizontal 45 Degree Elbow, 36" Radius, Steel Cable Tray Cover	128.09	12.86
		For 60 Degree Bend, Deduct	*-37.35*	
		For 30 Degree Bend, Deduct	*-62.96*	
26 05 36 00-2175	EA	18" Horizontal 45 Degree Elbow, 36" Radius, Steel Cable Tray Cover	146.27	14.32
		For 60 Degree Bend, Deduct	*-42.79*	
		For 30 Degree Bend, Deduct	*-72.11*	
26 05 36 00-2176	EA	24" Horizontal 45 Degree Elbow, 36" Radius, Steel Cable Tray Cover	178.25	17.48
		For 60 Degree Bend, Deduct	*-52.12*	
		For 30 Degree Bend, Deduct	*-87.84*	
26 05 36 00-2177	EA	30" Horizontal 45 Degree Elbow, 36" Radius, Steel Cable Tray Cover	197.19	20.87
		For 60 Degree Bend, Deduct	*-57.08*	
		For 30 Degree Bend, Deduct	*-96.30*	
26 05 36 00-2178	EA	36" Horizontal 45 Degree Elbow, 36" Radius, Steel Cable Tray Cover	234.02	22.56
		For 60 Degree Bend, Deduct	*-68.57*	
		For 30 Degree Bend, Deduct	*-115.54*	
26 05 36 00-2179		**90 Degree, 12" Radius Vertical Risers** *(26 05 36 00-2122)*		
26 05 36 00-2180	EA	6" Vertical Riser 90 Degree, 12" Radius, Steel Cable Tray Cover	59.57	7.22
26 05 36 00-2181	EA	9" Vertical Riser 90 Degree, 12" Radius, Steel Cable Tray Cover	62.59	8.46
26 05 36 00-2182	EA	12" Vertical Riser 90 Degree, 12" Radius, Steel Cable Tray Cover	68.79	10.04
26 05 36 00-2183	EA	18" Vertical Riser 90 Degree, 12" Radius, Steel Cable Tray Cover	79.92	12.30
26 05 36 00-2184	EA	24" Vertical Riser 90 Degree, 12" Radius, Steel Cable Tray Cover	87.15	15.91
26 05 36 00-2185	EA	30" Vertical Riser 90 Degree, 12" Radius, Steel Cable Tray Cover	96.85	18.16
26 05 36 00-2186	EA	36" Vertical Riser 90 Degree, 12" Radius, Steel Cable Tray Cover	122.13	21.66
26 05 36 00-2187		**90 Degree, 24" Radius Vertical Risers** *(26 05 36 00-2122)*		
26 05 36 00-2188	EA	6" Vertical Riser 90 Degree, 24" Radius, Steel Cable Tray Cover	71.49	8.01
26 05 36 00-2189	EA	9" Vertical Riser 90 Degree, 24" Radius, Steel Cable Tray Cover	79.82	9.36
26 05 36 00-2190	EA	12" Vertical Riser 90 Degree, 24" Radius, Steel Cable Tray Cover	85.52	11.28
26 05 36 00-2191	EA	18" Vertical Riser 90 Degree, 24" Radius, Steel Cable Tray Cover	111.06	13.53
26 05 36 00-2192	EA	24" Vertical Riser 90 Degree, 24" Radius, Steel Cable Tray Cover	128.51	17.48
26 05 36 00-2193	EA	30" Vertical Riser 90 Degree, 24" Radius, Steel Cable Tray Cover	147.45	20.87
26 05 36 00-2194	EA	36" Vertical Riser 90 Degree, 24" Radius, Steel Cable Tray Cover	169.57	24.59
26 05 36 00-2195		**90 Degree, 36" Radius Vertical Risers** *(26 05 36 00-2122)*		
26 05 36 00-2196	EA	6" Vertical Riser 90 Degree, 36" Radius, Steel Cable Tray Cover	82.86	9.02
26 05 36 00-2197	EA	9" Vertical Riser 90 Degree, 36" Radius, Steel Cable Tray Cover	103.44	10.37
26 05 36 00-2198	EA	12" Vertical Riser 90 Degree, 36" Radius, Steel Cable Tray Cover	118.44	12.86
26 05 36 00-2199	EA	18" Vertical Riser 90 Degree, 36" Radius, Steel Cable Tray Cover	146.27	14.32
26 05 36 00-2200	EA	24" Vertical Riser 90 Degree, 36" Radius, Steel Cable Tray Cover	169.13	19.97
26 05 36 00-2201	EA	30" Vertical Riser 90 Degree, 36" Radius, Steel Cable Tray Cover	201.70	23.58
26 05 36 00-2202	EA	36" Vertical Riser 90 Degree, 36" Radius, Steel Cable Tray Cover	236.60	27.07
26 05 36 00-2203		**12" Radius Horizontal Tees** *(26 05 36 00-2122)*		
26 05 36 00-2204	EA	6" Horizontal Tee, 12" Radius, Steel Cable Tray Cover	105.70	11.73
26 05 36 00-2205	EA	9" Horizontal Tee, 12" Radius, Steel Cable Tray Cover	111.06	13.53
26 05 36 00-2206	EA	12" Horizontal Tee, 12" Radius, Steel Cable Tray Cover	125.86	15.91

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-2207	EA	18" Horizontal Tee, 12" Radius, Steel Cable Tray Cover	151.38	18.05
26 05 36 00-2208	EA	24" Horizontal Tee, 12" Radius, Steel Cable Tray Cover	187.49	20.87
26 05 36 00-2209	EA	30" Horizontal Tee, 12" Radius, Steel Cable Tray Cover	229.47	30.00
26 05 36 00-2210	EA	36" Horizontal Tee, 12" Radius, Steel Cable Tray Cover	275.81	35.99
26 05 36 00-2211		**24" Radius Horizontal Tees** *(26 05 36 00-2122)*		
26 05 36 00-2212	EA	6" Horizontal Tee, 24" Radius, Steel Cable Tray Cover	156.29	12.30
26 05 36 00-2213	EA	9" Horizontal Tee, 24" Radius, Steel Cable Tray Cover	179.00	14.32
26 05 36 00-2214	EA	12" Horizontal Tee, 24" Radius, Steel Cable Tray Cover	188.20	16.92
26 05 36 00-2215	EA	18" Horizontal Tee, 24" Radius, Steel Cable Tray Cover	238.35	19.41
26 05 36 00-2216	EA	24" Horizontal Tee, 24" Radius, Steel Cable Tray Cover	352.71	22.56
26 05 36 00-2217	EA	30" Horizontal Tee, 24" Radius, Steel Cable Tray Cover	415.28	33.84
26 05 36 00-2218	EA	36" Horizontal Tee, 24" Radius, Steel Cable Tray Cover	464.58	41.62
26 05 36 00-2219		**36" Radius Horizontal Tees** *(26 05 36 00-2122)*		
26 05 36 00-2220	EA	6" Horizontal Tee, 36" Radius, Steel Cable Tray Cover	266.32	12.86
26 05 36 00-2221	EA	9" Horizontal Tee, 36" Radius, Steel Cable Tray Cover	274.78	15.01
26 05 36 00-2222	EA	12" Horizontal Tee, 36" Radius, Steel Cable Tray Cover	306.52	18.05
26 05 36 00-2223	EA	18" Horizontal Tee, 36" Radius, Steel Cable Tray Cover	359.70	20.87
26 05 36 00-2224	EA	24" Horizontal Tee, 36" Radius, Steel Cable Tray Cover	467.79	24.59
26 05 36 00-2225	EA	30" Horizontal Tee, 36" Radius, Steel Cable Tray Cover	527.72	38.80
26 05 36 00-2226	EA	36" Horizontal Tee, 36" Radius, Steel Cable Tray Cover	607.92	49.07
26 05 36 00-2227		**12" Radius Horizontal Crosses** *(26 05 36 00-2122)*		
26 05 36 00-2228	EA	6" Horizontal Cross, 12" Radius, Steel Cable Tray Cover	155.02	15.91
26 05 36 00-2229	EA	9" Horizontal Cross, 12" Radius, Steel Cable Tray Cover	163.98	16.92
26 05 36 00-2230	EA	12" Horizontal Cross, 12" Radius, Steel Cable Tray Cover	181.69	18.05
26 05 36 00-2231	EA	18" Horizontal Cross, 12" Radius, Steel Cable Tray Cover	214.16	20.87
26 05 36 00-2232	EA	24" Horizontal Cross, 12" Radius, Steel Cable Tray Cover	268.22	30.00
26 05 36 00-2233	EA	30" Horizontal Cross, 12" Radius, Steel Cable Tray Cover	309.70	35.99
26 05 36 00-2234	EA	36" Horizontal Cross, 12" Radius, Steel Cable Tray Cover	355.37	38.69
26 05 36 00-2235		**24" Radius Horizontal Crosses** *(26 05 36 00-2122)*		
26 05 36 00-2236	EA	6" Horizontal Cross, 24" Radius, Steel Cable Tray Cover	273.13	16.92
26 05 36 00-2237	EA	9" Horizontal Cross, 24" Radius, Steel Cable Tray Cover	296.83	18.05
26 05 36 00-2238	EA	12" Horizontal Cross, 24" Radius, Steel Cable Tray Cover	318.37	19.41
26 05 36 00-2239	EA	18" Horizontal Cross, 24" Radius, Steel Cable Tray Cover	379.38	22.56
26 05 36 00-2240	EA	24" Horizontal Cross, 24" Radius, Steel Cable Tray Cover	473.44	33.84
26 05 36 00-2241	EA	30" Horizontal Cross, 24" Radius, Steel Cable Tray Cover	539.66	41.62
26 05 36 00-2242	EA	36" Horizontal Cross, 24" Radius, Steel Cable Tray Cover	603.61	45.01
26 05 36 00-2243		**36" Radius Horizontal Crosses** *(26 05 36 00-2122)*		
26 05 36 00-2244	EA	6" Horizontal Cross, 36" Radius, Steel Cable Tray Cover	439.87	18.05
26 05 36 00-2245	EA	9" Horizontal Cross, 36" Radius, Steel Cable Tray Cover	456.58	19.41
26 05 36 00-2246	EA	12" Horizontal Cross, 36" Radius, Steel Cable Tray Cover	480.93	20.87
26 05 36 00-2247	EA	18" Horizontal Cross, 36" Radius, Steel Cable Tray Cover	555.08	24.59
26 05 36 00-2248	EA	24" Horizontal Cross, 36" Radius, Steel Cable Tray Cover	719.22	38.69
26 05 36 00-2249	EA	30" Horizontal Cross, 36" Radius, Steel Cable Tray Cover	785.29	49.30
26 05 36 00-2250	EA	36" Horizontal Cross, 36" Radius, Steel Cable Tray Cover	841.87	54.15
26 05 36 00-2251		**Reducers** *(26 05 36 00-2122)*		
26 05 36 00-2252	EA	9" To 6" Reducer, Steel Cable Tray Covers	68.66	8.46
26 05 36 00-2253	EA	12" To 6" Reducer, Steel Cable Tray Covers	73.68	10.04
26 05 36 00-2254	EA	12" To 9" Reducer, Steel Cable Tray Covers	73.68	10.04
26 05 36 00-2255	EA	18" To 6" Reducer, Steel Cable Tray Covers	81.13	12.30
26 05 36 00-2256	EA	18" To 12" Reducer, Steel Cable Tray Covers	81.13	12.30
26 05 36 00-2257	EA	24" To 12" Reducer, Steel Cable Tray Covers	100.15	13.53
26 05 36 00-2258	EA	24" To 18" Reducer, Steel Cable Tray Covers	107.42	13.53
26 05 36 00-2259	EA	30" To 12" Reducer, Steel Cable Tray Covers	103.39	15.46
26 05 36 00-2260	EA	30" To 18" Reducer, Steel Cable Tray Covers	110.66	15.46
26 05 36 00-2261	EA	30" To 24" Reducer, Steel Cable Tray Covers	115.51	15.46
26 05 36 00-2262	EA	36" To 12" Reducer, Steel Cable Tray Covers	120.28	16.92
26 05 36 00-2263	EA	36" To 18" Reducer, Steel Cable Tray Covers	122.70	16.92
26 05 36 00-2264	EA	36" To 24" Reducer, Steel Cable Tray Covers	125.12	16.92
26 05 36 00-2265	EA	36" To 30" Reducer, Steel Cable Tray Covers	126.34	16.92
26 05 36 00-2266		**Aluminum Covers** *(26 05 36 00-2121)*		
26 05 36 00-2267		**Ventilated Straight Sections** *(26 05 36 00-2266)*		
26 05 36 00-2268	LF	6" Aluminum Cable Tray Cover, Straight Section	12.14	2.03
26 05 36 00-2269	LF	9" Aluminum Cable Tray Cover, Straight Section	14.51	2.37
26 05 36 00-2270	LF	12" Aluminum Cable Tray Cover, Straight Section	17.06	2.71
26 05 36 00-2271	LF	18" Aluminum Cable Tray Cover, Straight Section	22.71	3.61

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-2272	LF	24" Aluminum Cable Tray Cover, Straight Section	29.12	4.85
26 05 36 00-2273	LF	30" Aluminum Cable Tray Cover, Straight Section	32.98	5.97
26 05 36 00-2274	LF	36" Aluminum Cable Tray Cover, Straight Section	137.43	67.79
26 05 36 00-2275		**90 Degree, 12" Radius Horizontal Elbows** *(26 05 36 00-2266)*		
26 05 36 00-2276	EA	6" Horizontal 90 Degree Elbow, 12" Radius, Aluminum Cable Tray Cover	68.96	7.22
26 05 36 00-2277	EA	9" Horizontal 90 Degree Elbow, 12" Radius, Aluminum Cable Tray Cover	73.46	8.46
26 05 36 00-2278	EA	12" Horizontal 90 Degree Elbow, 12" Radius, Aluminum Cable Tray Cover	80.96	10.04
26 05 36 00-2279	EA	18" Horizontal 90 Degree Elbow, 12" Radius, Aluminum Cable Tray Cover	105.51	12.86
26 05 36 00-2280	EA	24" Horizontal 90 Degree Elbow, 12" Radius, Aluminum Cable Tray Cover	133.67	16.36
26 05 36 00-2281	EA	30" Horizontal 90 Degree Elbow, 12" Radius, Aluminum Cable Tray Cover	157.54	18.16
26 05 36 00-2282	EA	36" Horizontal 90 Degree Elbow, 12" Radius, Aluminum Cable Tray Cover	191.95	21.66
26 05 36 00-2283		**90 Degree, 24" Radius Horizontal Elbows** *(26 05 36 00-2266)*		
26 05 36 00-2284	EA	6" Horizontal 90 Degree Elbow, 24" Radius, Aluminum Cable Tray Cover	91.21	8.01
26 05 36 00-2285	EA	9" Horizontal 90 Degree Elbow, 24" Radius, Aluminum Cable Tray Cover	112.03	9.36
26 05 36 00-2286	EA	12" Horizontal 90 Degree Elbow, 24" Radius, Aluminum Cable Tray Cover	125.19	11.28
26 05 36 00-2287	EA	18" Horizontal 90 Degree Elbow, 24" Radius, Aluminum Cable Tray Cover	149.94	14.32
26 05 36 00-2288	EA	24" Horizontal 90 Degree Elbow, 24" Radius, Aluminum Cable Tray Cover	185.93	18.05
26 05 36 00-2289	EA	30" Horizontal 90 Degree Elbow, 24" Radius, Aluminum Cable Tray Cover	225.12	20.76
26 05 36 00-2290	EA	36" Horizontal 90 Degree Elbow, 24" Radius, Aluminum Cable Tray Cover	276.02	24.59
26 05 36 00-2291		**90 Degree, 36" Radius Horizontal Elbows** *(26 05 36 00-2266)*		
26 05 36 00-2292	EA	6" Horizontal 90 Degree Elbow, 36" Radius, Aluminum Cable Tray Cover	148.53	9.02
26 05 36 00-2293	EA	9" Horizontal 90 Degree Elbow, 36" Radius, Aluminum Cable Tray Cover	163.29	10.37
26 05 36 00-2294	EA	12" Horizontal 90 Degree Elbow, 36" Radius, Aluminum Cable Tray Cover	187.17	12.86
26 05 36 00-2295	EA	18" Horizontal 90 Degree Elbow, 36" Radius, Aluminum Cable Tray Cover	222.93	15.01
26 05 36 00-2296	EA	24" Horizontal 90 Degree Elbow, 36" Radius, Aluminum Cable Tray Cover	274.60	20.87
26 05 36 00-2297	EA	30" Horizontal 90 Degree Elbow, 36" Radius, Aluminum Cable Tray Cover	316.25	23.58
26 05 36 00-2298	EA	36" Horizontal 90 Degree Elbow, 36" Radius, Aluminum Cable Tray Cover	369.05	27.07
26 05 36 00-2299		**45 Degree, 12" Radius Horizontal Elbows** *(26 05 36 00-2266)*		
26 05 36 00-2300	EA	6" Horizontal 45 Degree Elbow, 12" Radius, Aluminum Cable Tray Cover	54.14	7.22
		For 60 Degree Bend, Deduct	*-15.09*	
		For 30 Degree Bend, Deduct	*-25.55*	
26 05 36 00-2301	EA	9" Horizontal 45 Degree Elbow, 12" Radius, Aluminum Cable Tray Cover	57.38	8.46
		For 60 Degree Bend, Deduct	*-15.69*	
		For 30 Degree Bend, Deduct	*-26.62*	
26 05 36 00-2302	EA	12" Horizontal 45 Degree Elbow, 12" Radius, Aluminum Cable Tray Cover	65.14	10.04
		For 60 Degree Bend, Deduct	*-17.66*	
		For 30 Degree Bend, Deduct	*-30.00*	
26 05 36 00-2303	EA	18" Horizontal 45 Degree Elbow, 12" Radius, Aluminum Cable Tray Cover	76.14	12.30
		For 60 Degree Bend, Deduct	*-20.41*	
		For 30 Degree Bend, Deduct	*-34.71*	
26 05 36 00-2304	EA	24" Horizontal 45 Degree Elbow, 12" Radius, Aluminum Cable Tray Cover	85.61	14.21
		For 60 Degree Bend, Deduct	*-22.78*	
		For 30 Degree Bend, Deduct	*-38.76*	
26 05 36 00-2305	EA	30" Horizontal 45 Degree Elbow, 12" Radius, Aluminum Cable Tray Cover	105.27	16.36
		For 60 Degree Bend, Deduct	*-28.45*	
		For 30 Degree Bend, Deduct	*-48.32*	
26 05 36 00-2306	EA	36" Horizontal 45 Degree Elbow, 12" Radius, Aluminum Cable Tray Cover	124.07	18.05
		For 60 Degree Bend, Deduct	*-34.02*	
		For 30 Degree Bend, Deduct	*-57.71*	
26 05 36 00-2307		**45 Degree, 24" Radius Horizontal Elbows** *(26 05 36 00-2266)*		
26 05 36 00-2308	EA	6" Horizontal 45 Degree Elbow, 24" Radius, Aluminum Cable Tray Cover	62.16	8.01
		For 60 Degree Bend, Deduct	*-17.45*	
		For 30 Degree Bend, Deduct	*-29.53*	
26 05 36 00-2309	EA	9" Horizontal 45 Degree Elbow, 24" Radius, Aluminum Cable Tray Cover	77.40	9.36
		For 60 Degree Bend, Deduct	*-21.96*	
		For 30 Degree Bend, Deduct	*-37.12*	
26 05 36 00-2310	EA	12" Horizontal 45 Degree Elbow, 24" Radius, Aluminum Cable Tray Cover	83.14	11.28
		For 60 Degree Bend, Deduct	*-23.10*	
		For 30 Degree Bend, Deduct	*-39.13*	
26 05 36 00-2311	EA	18" Horizontal 45 Degree Elbow, 24" Radius, Aluminum Cable Tray Cover	100.50	13.53
		For 60 Degree Bend, Deduct	*-27.97*	
		For 30 Degree Bend, Deduct	*-47.37*	
26 05 36 00-2312	EA	24" Horizontal 45 Degree Elbow, 24" Radius, Aluminum Cable Tray Cover	122.29	15.46
		For 60 Degree Bend, Deduct	*-34.41*	
		For 30 Degree Bend, Deduct	*-58.22*	
26 05 36 00-2313	EA	30" Horizontal 45 Degree Elbow, 24" Radius, Aluminum Cable Tray Cover	141.45	18.05
		For 60 Degree Bend, Deduct	*-39.74*	
		For 30 Degree Bend, Deduct	*-67.25*	
26 05 36 00-2314	EA	36" Horizontal 45 Degree Elbow, 24" Radius, Aluminum Cable Tray Cover	163.35	20.87
		For 60 Degree Bend, Deduct	*-45.92*	
		For 30 Degree Bend, Deduct	*-77.68*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-2315		**45 Degree, 36" Radius Horizontal Elbows** *(26 05 36 00-2266)*		
26 05 36 00-2316	EA	6" Horizontal 45 Degree Elbow, 36" Radius, Aluminum Cable Tray Cover	99.09	9.02
		For 60 Degree Bend, Deduct	*-29.25*	
		For 30 Degree Bend, Deduct	*-49.25*	
26 05 36 00-2317	EA	9" Horizontal 45 Degree Elbow, 36" Radius, Aluminum Cable Tray Cover	108.88	10.37
		For 60 Degree Bend, Deduct	*-31.94*	
		For 30 Degree Bend, Deduct	*-53.80*	
26 05 36 00-2318	EA	12" Horizontal 45 Degree Elbow, 36" Radius, Aluminum Cable Tray Cover	117.87	12.86
		For 60 Degree Bend, Deduct	*-33.97*	
		For 30 Degree Bend, Deduct	*-57.34*	
26 05 36 00-2319	EA	18" Horizontal 45 Degree Elbow, 36" Radius, Aluminum Cable Tray Cover	140.07	14.32
		For 60 Degree Bend, Deduct	*-40.74*	
		For 30 Degree Bend, Deduct	*-68.70*	
26 05 36 00-2320	EA	24" Horizontal 45 Degree Elbow, 36" Radius, Aluminum Cable Tray Cover	170.12	17.48
		For 60 Degree Bend, Deduct	*-49.44*	
		For 30 Degree Bend, Deduct	*-83.37*	
26 05 36 00-2321	EA	30" Horizontal 45 Degree Elbow, 36" Radius, Aluminum Cable Tray Cover	195.50	20.87
		For 60 Degree Bend, Deduct	*-56.52*	
		For 30 Degree Bend, Deduct	*-95.37*	
26 05 36 00-2322	EA	36" Horizontal 45 Degree Elbow, 36" Radius, Aluminum Cable Tray Cover	220.65	22.56
		For 60 Degree Bend, Deduct	*-64.16*	
		For 30 Degree Bend, Deduct	*-108.19*	
26 05 36 00-2323		**90 Degree, 12" Radius Vertical Risers** *(26 05 36 00-2266)*		
26 05 36 00-2324	EA	6" Vertical Riser 90 Degree, 12" Radius, Aluminum Cable Tray Cover	60.53	7.22
26 05 36 00-2325	EA	9" Vertical Riser 90 Degree, 12" Radius, Aluminum Cable Tray Cover	62.95	8.46
26 05 36 00-2326	EA	12" Vertical Riser 90 Degree, 12" Radius, Aluminum Cable Tray Cover	69.83	10.04
26 05 36 00-2327	EA	18" Vertical Riser 90 Degree, 12" Radius, Aluminum Cable Tray Cover	82.35	12.30
26 05 36 00-2328	EA	24" Vertical Riser 90 Degree, 12" Radius, Aluminum Cable Tray Cover	90.83	15.91
26 05 36 00-2329	EA	30" Vertical Riser 90 Degree, 12" Radius, Aluminum Cable Tray Cover	95.71	18.16
26 05 36 00-2330	EA	36" Vertical Riser 90 Degree, 12" Radius, Aluminum Cable Tray Cover	115.20	21.66
26 05 36 00-2331		**90 Degree, 24" Radius Vertical Risers** *(26 05 36 00-2266)*		
26 05 36 00-2332	EA	6" Vertical Riser 90 Degree, 24" Radius, Aluminum Cable Tray Cover	68.95	8.01
26 05 36 00-2333	EA	9" Vertical Riser 90 Degree, 24" Radius, Aluminum Cable Tray Cover	76.16	9.36
26 05 36 00-2334	EA	12" Vertical Riser 90 Degree, 24" Radius, Aluminum Cable Tray Cover	84.38	11.28
26 05 36 00-2335	EA	18" Vertical Riser 90 Degree, 24" Radius, Aluminum Cable Tray Cover	101.70	13.53
26 05 36 00-2336	EA	24" Vertical Riser 90 Degree, 24" Radius, Aluminum Cable Tray Cover	115.66	17.48
26 05 36 00-2337	EA	30" Vertical Riser 90 Degree, 24" Radius, Aluminum Cable Tray Cover	146.00	20.87
26 05 36 00-2338	EA	36" Vertical Riser 90 Degree, 24" Radius, Aluminum Cable Tray Cover	162.25	24.59
26 05 36 00-2339		**90 Degree, 36" Radius Vertical Risers** *(26 05 36 00-2266)*		
26 05 36 00-2340	EA	6" Vertical Riser 90 Degree, 36" Radius, Aluminum Cable Tray Cover	79.27	9.02
26 05 36 00-2341	EA	9" Vertical Riser 90 Degree, 36" Radius, Aluminum Cable Tray Cover	96.51	10.37
26 05 36 00-2342	EA	12" Vertical Riser 90 Degree, 36" Radius, Aluminum Cable Tray Cover	112.97	12.86
26 05 36 00-2343	EA	18" Vertical Riser 90 Degree, 36" Radius, Aluminum Cable Tray Cover	135.13	14.32
26 05 36 00-2344	EA	24" Vertical Riser 90 Degree, 36" Radius, Aluminum Cable Tray Cover	164.43	19.97
26 05 36 00-2345	EA	30" Vertical Riser 90 Degree, 36" Radius, Aluminum Cable Tray Cover	204.96	23.58
26 05 36 00-2346	EA	36" Vertical Riser 90 Degree, 36" Radius, Aluminum Cable Tray Cover	223.12	27.07
26 05 36 00-2347		**12" Radius Horizontal Tees** *(26 05 36 00-2266)*		
26 05 36 00-2348	EA	6" Horizontal Tee, 12" Radius, Aluminum Cable Tray Cover	98.77	11.73
26 05 36 00-2349	EA	9" Horizontal Tee, 12" Radius, Aluminum Cable Tray Cover	106.65	13.53
26 05 36 00-2350	EA	12" Horizontal Tee, 12" Radius, Aluminum Cable Tray Cover	120.43	15.91
26 05 36 00-2351	EA	18" Horizontal Tee, 12" Radius, Aluminum Cable Tray Cover	141.45	18.05
26 05 36 00-2352	EA	24" Horizontal Tee, 12" Radius, Aluminum Cable Tray Cover	175.72	20.87
26 05 36 00-2353	EA	30" Horizontal Tee, 12" Radius, Aluminum Cable Tray Cover	215.76	30.00
26 05 36 00-2354	EA	36" Horizontal Tee, 12" Radius, Aluminum Cable Tray Cover	260.35	35.99
26 05 36 00-2355		**24" Radius Horizontal Tees** *(26 05 36 00-2266)*		
26 05 36 00-2356	EA	6" Horizontal Tee, 24" Radius, Aluminum Cable Tray Cover	149.12	12.30
26 05 36 00-2357	EA	9" Horizontal Tee, 24" Radius, Aluminum Cable Tray Cover	167.27	14.32
26 05 36 00-2358	EA	12" Horizontal Tee, 24" Radius, Aluminum Cable Tray Cover	188.93	16.92
26 05 36 00-2359	EA	18" Horizontal Tee, 24" Radius, Aluminum Cable Tray Cover	220.23	19.41
26 05 36 00-2360	EA	24" Horizontal Tee, 24" Radius, Aluminum Cable Tray Cover	336.77	22.56
26 05 36 00-2361	EA	30" Horizontal Tee, 24" Radius, Aluminum Cable Tray Cover	387.85	33.84
26 05 36 00-2362	EA	36" Horizontal Tee, 24" Radius, Aluminum Cable Tray Cover	437.88	41.62
26 05 36 00-2363		**36" Radius Horizontal Tees** *(26 05 36 00-2266)*		
26 05 36 00-2364	EA	6" Horizontal Tee, 36" Radius, Aluminum Cable Tray Cover	256.39	12.86
26 05 36 00-2365	EA	9" Horizontal Tee, 36" Radius, Aluminum Cable Tray Cover	264.94	15.01
26 05 36 00-2366	EA	12" Horizontal Tee, 36" Radius, Aluminum Cable Tray Cover	294.75	18.05
26 05 36 00-2367	EA	18" Horizontal Tee, 36" Radius, Aluminum Cable Tray Cover	334.06	20.87
26 05 36 00-2368	EA	24" Horizontal Tee, 36" Radius, Aluminum Cable Tray Cover	421.94	24.59

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-2369	EA	30" Horizontal Tee, 36" Radius, Aluminum Cable Tray Cover	492.49	38.80
26 05 36 00-2370	EA	36" Horizontal Tee, 36" Radius, Aluminum Cable Tray Cover	564.06	49.07
26 05 36 00-2371		**12" Radius Horizontal Crosses** *(26 05 36 00-2266)*		
26 05 36 00-2372	EA	6" Horizontal Cross, 12" Radius, Aluminum Cable Tray Cover	147.70	15.91
26 05 36 00-2373	EA	9" Horizontal Cross, 12" Radius, Aluminum Cable Tray Cover	156.81	16.92
26 05 36 00-2374	EA	12" Horizontal Cross, 12" Radius, Aluminum Cable Tray Cover	173.60	18.05
26 05 36 00-2375	EA	18" Horizontal Cross, 12" Radius, Aluminum Cable Tray Cover	207.87	20.87
26 05 36 00-2376	EA	24" Horizontal Cross, 12" Radius, Aluminum Cable Tray Cover	250.33	30.00
26 05 36 00-2377	EA	30" Horizontal Cross, 12" Radius, Aluminum Cable Tray Cover	297.39	35.99
26 05 36 00-2378	EA	36" Horizontal Cross, 12" Radius, Aluminum Cable Tray Cover	338.94	38.69
26 05 36 00-2379		**24" Radius Horizontal Crosses** *(26 05 36 00-2266)*		
26 05 36 00-2380	EA	6" Horizontal Cross, 24" Radius, Aluminum Cable Tray Cover	265.67	16.92
26 05 36 00-2381	EA	9" Horizontal Cross, 24" Radius, Aluminum Cable Tray Cover	284.86	18.05
26 05 36 00-2382	EA	12" Horizontal Cross, 24" Radius, Aluminum Cable Tray Cover	306.79	19.41
26 05 36 00-2383	EA	18" Horizontal Cross, 24" Radius, Aluminum Cable Tray Cover	356.56	22.56
26 05 36 00-2384	EA	24" Horizontal Cross, 24" Radius, Aluminum Cable Tray Cover	437.28	33.84
26 05 36 00-2385	EA	30" Horizontal Cross, 24" Radius, Aluminum Cable Tray Cover	514.46	41.62
26 05 36 00-2386	EA	36" Horizontal Cross, 24" Radius, Aluminum Cable Tray Cover	557.32	45.01
26 05 36 00-2387		**36" Radius Horizontal Crosses** *(26 05 36 00-2266)*		
26 05 36 00-2388	EA	6" Horizontal Cross, 36" Radius, Aluminum Cable Tray Cover	410.99	18.05
26 05 36 00-2389	EA	9" Horizontal Cross, 36" Radius, Aluminum Cable Tray Cover	430.46	19.41
26 05 36 00-2390	EA	12" Horizontal Cross, 36" Radius, Aluminum Cable Tray Cover	462.67	20.87
26 05 36 00-2391	EA	18" Horizontal Cross, 36" Radius, Aluminum Cable Tray Cover	510.98	24.59
26 05 36 00-2392	EA	24" Horizontal Cross, 36" Radius, Aluminum Cable Tray Cover	645.78	38.69
26 05 36 00-2393	EA	30" Horizontal Cross, 36" Radius, Aluminum Cable Tray Cover	749.93	49.30
26 05 36 00-2394	EA	36" Horizontal Cross, 36" Radius, Aluminum Cable Tray Cover	819.85	54.15
26 05 36 00-2395		**Reducers** *(26 05 36 00-2266)*		
26 05 36 00-2396	EA	9" To 6" Reducer, Aluminum Cable Tray Covers	74.70	8.46
26 05 36 00-2397	EA	12" To 6" Reducer, Aluminum Cable Tray Covers	79.76	10.04
26 05 36 00-2398	EA	12" To 9" Reducer, Aluminum Cable Tray Covers	79.77	10.04
26 05 36 00-2399	EA	18" To 6" Reducer, Aluminum Cable Tray Covers	89.76	12.30
26 05 36 00-2400	EA	18" To 12" Reducer, Aluminum Cable Tray Covers	89.75	12.30
26 05 36 00-2401	EA	24" To 12" Reducer, Aluminum Cable Tray Covers	99.23	13.53
26 05 36 00-2402	EA	24" To 18" Reducer, Aluminum Cable Tray Covers	109.08	13.53
26 05 36 00-2403	EA	30" To 12" Reducer, Aluminum Cable Tray Covers	114.84	15.46
26 05 36 00-2404	EA	30" To 18" Reducer, Aluminum Cable Tray Covers	118.53	15.46
26 05 36 00-2405	EA	30" To 24" Reducer, Aluminum Cable Tray Covers	121.05	15.46
26 05 36 00-2406	EA	36" To 12" Reducer, Aluminum Cable Tray Covers	127.07	16.92
26 05 36 00-2407	EA	36" To 18" Reducer, Aluminum Cable Tray Covers	129.54	16.92
26 05 36 00-2408	EA	36" To 24" Reducer, Aluminum Cable Tray Covers	130.78	16.92
26 05 36 00-2409	EA	36" To 30" Reducer, Aluminum Cable Tray Covers	132.02	16.92
26 05 36 00-2410		**Galvanized Steel Dividers** *(26 05 36 00-2121)*		
26 05 36 00-2411		**Straight Dividers** *(26 05 36 00-2410)*		
26 05 36 00-2412	LF	3" Deep Galvanized Steel Divider Strip, Straight	11.18	2.71
26 05 36 00-2413	LF	4" Deep Galvanized Steel Divider Strip, Straight	13.21	2.94
26 05 36 00-2414	LF	6" Deep Galvanized Steel Divider Strip, Straight	16.43	3.39
26 05 36 00-2415		**3" Deep Vertical Dividers** *(26 05 36 00-2410)*		
26 05 36 00-2416	EA	Vertical Divider, 3" Deep, 12" Radius, 30 Degree, Steel Cable Tray	65.00	19.41
26 05 36 00-2417	EA	Vertical Divider, 3" Deep, 12" Radius, 45 Degree, Steel Cable Tray	74.49	20.08
26 05 36 00-2418	EA	Vertical Divider, 3" Deep, 12" Radius, 60 Degree, Steel Cable Tray	78.38	20.87
26 05 36 00-2419	EA	Vertical Divider, 3" Deep, 12" Radius, 90 Degree, Steel Cable Tray	90.65	21.66
26 05 36 00-2420	EA	Vertical Divider, 3" Deep, 24" Radius, 30 Degree, Steel Cable Tray	85.80	21.66
26 05 36 00-2421	EA	Vertical Divider, 3" Deep, 24" Radius, 45 Degree, Steel Cable Tray	93.33	22.56
26 05 36 00-2422	EA	Vertical Divider, 3" Deep, 24" Radius, 60 Degree, Steel Cable Tray	109.56	23.58
26 05 36 00-2423	EA	Vertical Divider, 3" Deep, 24" Radius, 90 Degree, Steel Cable Tray	136.83	24.59
26 05 36 00-2424	EA	Vertical Divider, 3" Deep, 36" Radius, 30 Degree, Steel Cable	107.74	24.59
26 05 36 00-2425	EA	Vertical Divider, 3" Deep, 36" Radius, 45 Degree, Steel Cable Tray	120.56	25.83
26 05 36 00-2426	EA	Vertical Divider, 3" Deep, 36" Radius, 60 Degree, Steel Cable Tray	136.04	27.07
26 05 36 00-2427	EA	Vertical Divider, 3" Deep, 36" Radius, 90 Degree, Steel Cable Tray	173.57	28.54
26 05 36 00-2428		**4" Deep Vertical Dividers** *(26 05 36 00-2410)*		
26 05 36 00-2429	EA	Vertical Divider, 4" Deep, 12" Radius, 30 Degree, Steel Cable Tray	75.09	20.08
26 05 36 00-2430	EA	Vertical Divider, 4" Deep, 12" Radius, 45 Degree, Steel Cable Tray	83.23	20.87
26 05 36 00-2431	EA	Vertical Divider, 4" Deep, 12" Radius, 60 Degree, Steel Cable Tray	90.65	21.66
26 05 36 00-2432	EA	Vertical Divider, 4" Deep, 12" Radius, 90 Degree, Steel Cable Tray	104.24	22.56
26 05 36 00-2433	EA	Vertical Divider, 4" Deep, 24" Radius, 30 Degree, Steel Cable Tray	104.24	22.56

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-2434	EA	Vertical Divider, 4" Deep, 24" Radius, 45 Degree, Steel Cable Tray	122.90	23.58
26 05 36 00-2435	EA	Vertical Divider, 4" Deep, 24" Radius, 60 Degree, Steel Cable Tray	135.62	24.59
26 05 36 00-2436	EA	Vertical Divider, 4" Deep, 24" Radius, 90 Degree, Steel Cable Tray	169.05	25.83
26 05 36 00-2437	EA	Vertical Divider, 4" Deep, 36" Radius, 30 Degree, Steel Cable Tray	116.84	23.58
26 05 36 00-2438	EA	Vertical Divider, 4" Deep, 36" Radius, 45 Degree, Steel Cable Tray	129.56	24.59
26 05 36 00-2439	EA	Vertical Divider, 4" Deep, 36" Radius, 60 Degree, Steel Cable Tray	154.50	25.83
26 05 36 00-2440	EA	Vertical Divider, 4" Deep, 36" Radius, 90 Degree, Steel Cable Tray	196.66	27.07
26 05 36 00-2441		**6" Deep Vertical Dividers** *(26 05 36 00-2410)*		
26 05 36 00-2442	EA	Vertical Divider, 6" Deep, 12" Radius, 30 Degree, Steel Cable Tray	83.02	22.56
26 05 36 00-2443	EA	Vertical Divider, 6" Deep, 12" Radius, 45 Degree, Steel Cable Tray	90.17	23.58
26 05 36 00-2444	EA	Vertical Divider, 6" Deep, 12" Radius, 60 Degree, Steel Cable Tray	99.25	24.59
26 05 36 00-2445	EA	Vertical Divider, 6" Deep, 12" Radius, 90 Degree, Steel Cable Tray	115.71	25.83
26 05 36 00-2446	EA	Vertical Divider, 6" Deep, 24" Radius, 30 Degree, Steel Cable Tray	105.93	23.58
26 05 36 00-2447	EA	Vertical Divider, 6" Deep, 24" Radius, 45 Degree, Steel Cable Tray	124.71	24.59
26 05 36 00-2448	EA	Vertical Divider, 6" Deep, 24" Radius, 60 Degree, Steel Cable Tray	138.74	25.83
26 05 36 00-2449	EA	Vertical Divider, 6" Deep, 24" Radius, 90 Degree, Steel Cable Tray	171.20	27.07
26 05 36 00-2450	EA	Vertical Divider, 6" Deep, 36" Radius, 30 Degree, Steel Cable Tray	118.65	24.59
26 05 36 00-2451	EA	Vertical Divider, 6" Deep, 36" Radius, 45 Degree, Steel Cable Tray	138.74	25.83
26 05 36 00-2452	EA	Vertical Divider, 6" Deep, 36" Radius, 60 Degree, Steel Cable Tray	171.20	27.07
26 05 36 00-2453	EA	Vertical Divider, 6" Deep, 36" Radius, 90 Degree, Steel Cable Tray	209.94	28.54
26 05 36 00-2454		**Horizontal Dividers** *(26 05 36 00-2410)*		
26 05 36 00-2455	EA	3" Deep Horizontal Fitting Divider Strip, Steel Cable Tray	73.96	16.36
26 05 36 00-2456	EA	4" Deep Horizontal Fitting Divider Strip, Steel Cable Tray	82.25	18.05
26 05 36 00-2457	EA	6" Deep Horizontal Fitting Divider Strip, Steel Cable Tray	100.07	20.08
26 05 36 00-2458		**Aluminum Dividers** *(26 05 36 00-2121)*		
26 05 36 00-2459		**Straight Dividers** *(26 05 36 00-2458)*		
26 05 36 00-2460	LF	3" Deep Aluminum Divider Strip, Straight	11.09	2.60
26 05 36 00-2461	LF	4" Deep Aluminum Divider Strip, Straight	13.15	2.82
26 05 36 00-2462	LF	6" Deep Aluminum Divider Strip, Straight	16.31	3.16
26 05 36 00-2463		**3" Deep Vertical Dividers** *(26 05 36 00-2458)*		
26 05 36 00-2464	EA	Vertical Divider, 3" Deep, 12" Radius, 30 Degree, Aluminum Cable Tray	58.23	18.72
26 05 36 00-2465	EA	Vertical Divider, 3" Deep, 12" Radius, 45 Degree, Aluminum Cable Tray	64.22	19.41
26 05 36 00-2466	EA	Vertical Divider, 3" Deep, 12" Radius, 60 Degree, Aluminum Cable Tray	70.78	20.08
26 05 36 00-2467	EA	Vertical Divider, 3" Deep, 12" Radius, 90 Degree, Aluminum Cable Tray	82.07	20.87
26 05 36 00-2468	EA	Vertical Divider, 3" Deep, 24" Radius, 30 Degree, Aluminum Cable Tray	79.71	20.87
26 05 36 00-2469	EA	Vertical Divider, 3" Deep, 24" Radius, 45 Degree, Aluminum Cable Tray	88.17	21.66
26 05 36 00-2470	EA	Vertical Divider, 3" Deep, 24" Radius, 60 Degree, Aluminum Cable Tray	102.64	22.56
26 05 36 00-2471	EA	Vertical Divider, 3" Deep, 24" Radius, 90 Degree, Aluminum Cable Tray	128.00	23.58
26 05 36 00-2472	EA	Vertical Divider, 3" Deep, 36" Radius, 30 Degree, Aluminum Cable Tray	107.88	23.58
26 05 36 00-2473	EA	Vertical Divider, 3" Deep, 36" Radius, 45 Degree, Aluminum Cable Tray	129.81	24.59
26 05 36 00-2474	EA	Vertical Divider, 3" Deep, 36" Radius, 60 Degree, Aluminum Cable Tray	157.75	25.83
26 05 36 00-2475	EA	Vertical Divider, 3" Deep, 36" Radius, 90 Degree, Aluminum Cable Tray	195.40	27.07
26 05 36 00-2476		**4" Deep Vertical Dividers** *(26 05 36 00-2458)*		
26 05 36 00-2477	EA	Vertical Divider, 4" Deep, 12" Radius, 30 Degree, Aluminum Cable Tray	70.49	19.41
26 05 36 00-2478	EA	Vertical Divider, 4" Deep, 12" Radius, 45 Degree, Aluminum Cable Tray	77.76	20.08
26 05 36 00-2479	EA	Vertical Divider, 4" Deep, 12" Radius, 60 Degree, Aluminum Cable Tray	85.62	20.87
26 05 36 00-2480	EA	Vertical Divider, 4" Deep, 12" Radius, 90 Degree, Aluminum Cable Tray	96.45	21.66
26 05 36 00-2481	EA	Vertical Divider, 4" Deep, 24" Radius, 30 Degree, Aluminum Cable Tray	95.27	21.66
26 05 36 00-2482	EA	Vertical Divider, 4" Deep, 24" Radius, 45 Degree, Aluminum Cable Tray	110.93	22.56
26 05 36 00-2483	EA	Vertical Divider, 4" Deep, 24" Radius, 60 Degree, Aluminum Cable Tray	125.63	23.58
26 05 36 00-2484	EA	Vertical Divider, 4" Deep, 24" Radius, 90 Degree, Aluminum Cable Tray	159.39	24.59
26 05 36 00-2485	EA	Vertical Divider, 4" Deep, 36" Radius, 30 Degree, Aluminum Cable Tray	129.86	22.56
26 05 36 00-2486	EA	Vertical Divider, 4" Deep, 36" Radius, 45 Degree, Aluminum Cable Tray	157.58	23.58
26 05 36 00-2487	EA	Vertical Divider, 4" Deep, 36" Radius, 60 Degree, Aluminum Cable Tray	185.43	24.59
26 05 36 00-2488	EA	Vertical Divider, 4" Deep, 36" Radius, 90 Degree, Aluminum Cable Tray	225.20	25.83
26 05 36 00-2489		**6" Deep Vertical Dividers** *(26 05 36 00-2458)*		
26 05 36 00-2490	EA	Vertical Divider, 6" Deep, 12" Radius, 30 Degree, Aluminum Cable Tray	77.99	21.66
26 05 36 00-2491	EA	Vertical Divider, 6" Deep, 12" Radius, 45 Degree, Aluminum Cable Tray	87.26	22.56
26 05 36 00-2492	EA	Vertical Divider, 6" Deep, 12" Radius, 60 Degree, Aluminum Cable Tray	91.32	23.58
26 05 36 00-2493	EA	Vertical Divider, 6" Deep, 12" Radius, 90 Degree, Aluminum Cable Tray	102.59	24.59
26 05 36 00-2494	EA	Vertical Divider, 6" Deep, 24" Radius, 30 Degree, Aluminum Cable Tray	99.09	22.56
26 05 36 00-2495	EA	Vertical Divider, 6" Deep, 24" Radius, 45 Degree, Aluminum Cable Tray	123.27	23.58
26 05 36 00-2496	EA	Vertical Divider, 6" Deep, 24" Radius, 60 Degree, Aluminum Cable Tray	133.36	24.59
26 05 36 00-2497	EA	Vertical Divider, 6" Deep, 24" Radius, 90 Degree, Aluminum Cable Tray	168.40	25.83
26 05 36 00-2498	EA	Vertical Divider, 6" Deep, 36" Radius, 30 Degree, Aluminum Cable Tray	132.73	23.58
26 05 36 00-2499	EA	Vertical Divider, 6" Deep, 36" Radius, 45 Degree, Aluminum Cable Tray	166.49	24.59
26 05 36 00-2500	EA	Vertical Divider, 6" Deep, 36" Radius, 60 Degree, Aluminum Cable Tray	190.89	25.83

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-2501	EA	Vertical Divider, 6" Deep, 36" Radius, 90 Degree, Aluminum Cable Tray	222.62	27.07
26 05 36 00-2502		**Horizontal Dividers** *(26 05 36 00-2458)*		
26 05 36 00-2503	EA	3" Deep Horizontal Fitting Divider Strip, Aluminum Cable Tray	68.90	15.46
26 05 36 00-2504	EA	4" Deep Horizontal Fitting Divider Strip, Aluminum Cable Tray	75.53	16.92
26 05 36 00-2505	EA	6" Deep Horizontal Fitting Divider Strip, Aluminum Cable Tray	93.85	18.72
26 05 36 00-2506		**Cable Tray Wall Brackets** *(26 05 36 00-0001)*		
26 05 36 00-2507		**Wall Brackets** *(26 05 36 00-2506)*		
26 05 36 00-2508	EA	6" Wide Cable Tray Wall Bracket	90.38	22.56
26 05 36 00-2509	EA	9" Wide Cable Tray Wall Bracket	93.57	23.58
26 05 36 00-2510	EA	12" Wide Cable Tray Wall Bracket	102.93	24.59
26 05 36 00-2511	EA	18" Wide Cable Tray Wall Bracket	109.37	25.83
26 05 36 00-2512	EA	24" Wide Cable Tray Wall Bracket	119.06	27.07
26 05 36 00-2513	EA	30" Wide Cable Tray Wall Bracket	142.55	28.54
26 05 36 00-2514	EA	36" Wide Cable Tray Wall Bracket	171.48	30.45
26 05 36 00-2515		**Fiberglass Cable Tray** *(26 05 36 00-0001)*		
26 05 36 00-2516		**Ladder Bottom Fiberglass Cable Tray** *(26 05 36 00-2515)*		
		Note: Excludes hangers and support system.		
26 05 36 00-2517		**Straight Tray Sections** *(26 05 36 00-2516)*		
26 05 36 00-2518	LF	6" Fiberglass Cable Tray - Straight Section, 12" Rung Spacing	13.92	3.05
		For 9" Rung Spacing, Add	*0.33*	
		For 6" Rung Spacing, Add	*1.41*	
		For 4" Rung Spacing, Add	*2.59*	
		For 18" Rung Spacing, Deduct	*-0.24*	
		For Solid Bottom, Add	*3.50*	
		For Vented Trough Bottom, Add	*4.33*	
26 05 36 00-2519	LF	9" Fiberglass Cable Tray - Straight Section, 12" Rung Spacing	15.36	3.72
		For 9" Rung Spacing, Add	*0.34*	
		For 6" Rung Spacing, Add	*1.46*	
		For 4" Rung Spacing, Add	*2.67*	
		For 18" Rung Spacing, Deduct	*-0.24*	
		For Solid Bottom, Add	*3.76*	
		For Vented Trough Bottom, Add	*4.59*	
26 05 36 00-2520	LF	12" Fiberglass Cable Tray - Straight Section, 12" Rung Spacing	16.76	4.51
		For 9" Rung Spacing, Add	*0.35*	
		For 6" Rung Spacing, Add	*1.50*	
		For 4" Rung Spacing, Add	*2.75*	
		For 18" Rung Spacing, Deduct	*-0.25*	
		For Solid Bottom, Add	*4.01*	
		For Vented Trough Bottom, Add	*4.84*	
26 05 36 00-2521	LF	18" Fiberglass Cable Tray - Straight Section, 12" Rung Spacing	19.76	5.97
		For 9" Rung Spacing, Add	*0.38*	
		For 6" Rung Spacing, Add	*1.61*	
		For 4" Rung Spacing, Add	*2.95*	
		For 18" Rung Spacing, Deduct	*-0.27*	
		For Solid Bottom, Add	*4.58*	
		For Vented Trough Bottom, Add	*5.42*	
26 05 36 00-2522	LF	24" Fiberglass Cable Tray - Straight Section, 12" Rung Spacing	22.75	7.56
		For 9" Rung Spacing, Add	*0.40*	
		For 6" Rung Spacing, Add	*1.72*	
		For 4" Rung Spacing, Add	*3.15*	
		For 18" Rung Spacing, Deduct	*-0.29*	
		For Solid Bottom, Add	*5.13*	
		For Vented Trough Bottom, Add	*6.00*	
26 05 36 00-2523	LF	30" Fiberglass Cable Tray - Straight Section, 12" Rung Spacing	24.85	8.23
		For 9" Rung Spacing, Add	*0.44*	
		For 6" Rung Spacing, Add	*1.87*	
		For 4" Rung Spacing, Add	*3.42*	
		For 18" Rung Spacing, Deduct	*-0.31*	
		For Solid Bottom, Add	*5.59*	
		For Vented Trough Bottom, Add	*6.53*	
26 05 36 00-2524	LF	36" Fiberglass Cable Tray - Straight Section, 12" Rung Spacing	26.99	9.02
		For 9" Rung Spacing, Add	*0.47*	
		For 6" Rung Spacing, Add	*2.02*	
		For 4" Rung Spacing, Add	*3.70*	
		For 18" Rung Spacing, Deduct	*-0.34*	
		For Solid Bottom, Add	*6.07*	
		For Vented Trough Bottom, Add	*7.08*	
26 05 36 00-2525		**90 Degree Horizontal Elbows** *(26 05 36 00-2516)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-2526	EA	6" Horizontal 90 Degree Elbow, Fiberglass Cable Tray	71.92	22.56
		For 9" Rung Spacing, Add	*1.33*	
		For 6" Rung Spacing, Add	*5.71*	
		For 4" Rung Spacing, Add	*10.47*	
		For 18" Rung Spacing, Deduct	*-0.95*	
		For Solid Bottom, Add	*16.50*	
		For Vented Trough Bottom, Add	*19.46*	
		For 60 Degree Bend, Deduct	*-15.95*	
		For 45 Degree Bend, Deduct	*-21.83*	
		For 30 Degree Bend, Deduct	*-27.71*	
26 05 36 00-2527	EA	9" Horizontal 90 Degree Elbow, Fiberglass Cable Tray	79.74	26.28
		For 9" Rung Spacing, Add	*1.41*	
		For 6" Rung Spacing, Add	*6.04*	
		For 4" Rung Spacing, Add	*11.07*	
		For 18" Rung Spacing, Deduct	*-1.01*	
		For Solid Bottom, Add	*18.00*	
		For Vented Trough Bottom, Add	*21.04*	
		For 60 Degree Bend, Deduct	*-17.23*	
		For 45 Degree Bend, Deduct	*-23.64*	
		For 30 Degree Bend, Deduct	*-30.04*	
26 05 36 00-2528	EA	12" Horizontal 90 Degree Elbow, Fiberglass Cable Tray	92.07	33.05
		For 9" Rung Spacing, Add	*1.49*	
		For 6" Rung Spacing, Add	*6.37*	
		For 4" Rung Spacing, Add	*11.67*	
		For 18" Rung Spacing, Deduct	*-1.06*	
		For Solid Bottom, Add	*20.18*	
		For Vented Trough Bottom, Add	*23.18*	
		For 60 Degree Bend, Deduct	*-18.97*	
		For 45 Degree Bend, Deduct	*-26.12*	
		For 30 Degree Bend, Deduct	*-33.27*	
26 05 36 00-2529	EA	18" Horizontal 90 Degree Elbow, Fiberglass Cable Tray	108.53	39.94
		For 9" Rung Spacing, Add	*1.71*	
		For 6" Rung Spacing, Add	*7.31*	
		For 4" Rung Spacing, Add	*13.41*	
		For 18" Rung Spacing, Deduct	*-1.22*	
		For Solid Bottom, Add	*23.59*	
		For Vented Trough Bottom, Add	*26.97*	
		For 60 Degree Bend, Deduct	*-22.07*	
		For 45 Degree Bend, Deduct	*-30.42*	
		For 30 Degree Bend, Deduct	*-38.77*	
26 05 36 00-2530	EA	24" Horizontal 90 Degree Elbow, Fiberglass Cable Tray	122.40	45.91
		For 9" Rung Spacing, Add	*1.88*	
		For 6" Rung Spacing, Add	*8.04*	
		For 4" Rung Spacing, Add	*14.74*	
		For 18" Rung Spacing, Deduct	*-1.34*	
		For Solid Bottom, Add	*26.40*	
		For Vented Trough Bottom, Add	*30.04*	
		For 60 Degree Bend, Deduct	*-24.57*	
		For 45 Degree Bend, Deduct	*-33.90*	
		For 30 Degree Bend, Deduct	*-43.24*	
26 05 36 00-2531	EA	30" Horizontal 90 Degree Elbow, Fiberglass Cable Tray	134.92	48.96
		For 9" Rung Spacing, Add	*2.16*	
		For 6" Rung Spacing, Add	*9.24*	
		For 4" Rung Spacing, Add	*16.94*	
		For 18" Rung Spacing, Deduct	*-1.54*	
		For Solid Bottom, Add	*29.48*	
		For Vented Trough Bottom, Add	*33.81*	
		For 60 Degree Bend, Deduct	*-27.66*	
		For 45 Degree Bend, Deduct	*-38.10*	
		For 30 Degree Bend, Deduct	*-48.54*	
26 05 36 00-2532	EA	36" Horizontal 90 Degree Elbow, Fiberglass Cable Tray	149.71	52.68
		For 9" Rung Spacing, Add	*2.48*	
		For 6" Rung Spacing, Add	*10.61*	
		For 4" Rung Spacing, Add	*19.46*	
		For 18" Rung Spacing, Deduct	*-1.77*	
		For Solid Bottom, Add	*33.07*	
		For Vented Trough Bottom, Add	*38.17*	
		For 60 Degree Bend, Deduct	*-31.24*	
		For 45 Degree Bend, Deduct	*-42.97*	
		For 30 Degree Bend, Deduct	*-54.70*	

26 05 36 00-2533 Inside Or Outside Vertical Risers *(26 05 36 00-2516)*

26 05 36 00-2534	EA	6" Vertical Inside Or Outside Riser 90, Fiberglass Cable Tray	111.69	22.56
		For 9" Rung Spacing, Add	*2.72*	
		For 6" Rung Spacing, Add	*11.68*	
		For 4" Rung Spacing, Add	*21.41*	
		For 18" Rung Spacing, Deduct	*-1.95*	
		For Solid Bottom, Add	*28.43*	
		For Vented Trough Bottom, Add	*35.37*	
		For 60 Degree Bend, Deduct	*-29.07*	
		For 45 Degree Bend, Deduct	*-39.33*	
		For 30 Degree Bend, Deduct	*-49.59*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-2535	EA	9" Vertical Inside Or Outside Riser 90, Fiberglass	118.43	26.28
		For 9" Rung Spacing, Add	*2.76*	
		For 6" Rung Spacing, Add	*11.84*	
		For 4" Rung Spacing, Add	*21.71*	
		For 18" Rung Spacing, Deduct	*-1.97*	
		For Solid Bottom, Add	*29.61*	
		For Vented Trough Bottom, Add	*36.52*	
		For 60 Degree Bend, Deduct	*-30.00*	
		For 45 Degree Bend, Deduct	*-40.66*	
		For 30 Degree Bend, Deduct	*-51.32*	
26 05 36 00-2536	EA	12" Vertical Inside Or Outside Riser 90, Fiberglass Cable Tray	129.67	33.05
		For 9" Rung Spacing, Add	*2.80*	
		For 6" Rung Spacing, Add	*12.00*	
		For 4" Rung Spacing, Add	*22.01*	
		For 18" Rung Spacing, Deduct	*-2.00*	
		For Solid Bottom, Add	*31.46*	
		For Vented Trough Bottom, Add	*38.22*	
		For 60 Degree Bend, Deduct	*-31.37*	
		For 45 Degree Bend, Deduct	*-42.66*	
		For 30 Degree Bend, Deduct	*-53.94*	
26 05 36 00-2537	EA	18" Vertical Inside Or Outside Riser 90, Fiberglass Cable Tray	142.24	39.94
		For 9" Rung Spacing, Add	*2.89*	
		For 6" Rung Spacing, Add	*12.37*	
		For 4" Rung Spacing, Add	*22.68*	
		For 18" Rung Spacing, Deduct	*-2.06*	
		For Solid Bottom, Add	*33.71*	
		For Vented Trough Bottom, Add	*40.46*	
		For 60 Degree Bend, Deduct	*-33.19*	
		For 45 Degree Bend, Deduct	*-45.25*	
		For 30 Degree Bend, Deduct	*-57.31*	
26 05 36 00-2538	EA	24" Vertical Inside Or Outside Riser 90, Fiberglass Cable Tray	153.44	45.91
		For 9" Rung Spacing, Add	*2.96*	
		For 6" Rung Spacing, Add	*12.70*	
		For 4" Rung Spacing, Add	*23.28*	
		For 18" Rung Spacing, Deduct	*-2.12*	
		For Solid Bottom, Add	*35.71*	
		For Vented Trough Bottom, Add	*42.46*	
		For 60 Degree Bend, Deduct	*-34.81*	
		For 45 Degree Bend, Deduct	*-47.56*	
		For 30 Degree Bend, Deduct	*-60.31*	
26 05 36 00-2539	EA	30" Vertical Inside Or Outside Riser 90, Fiberglass Cable Tray	160.14	48.96
		For 9" Rung Spacing, Add	*3.04*	
		For 6" Rung Spacing, Add	*13.02*	
		For 4" Rung Spacing, Add	*23.88*	
		For 18" Rung Spacing, Deduct	*-2.17*	
		For Solid Bottom, Add	*37.04*	
		For Vented Trough Bottom, Add	*43.89*	
		For 60 Degree Bend, Deduct	*-35.98*	
		For 45 Degree Bend, Deduct	*-49.20*	
		For 30 Degree Bend, Deduct	*-62.42*	
26 05 36 00-2540	EA	36" Vertical Inside Or Outside Riser 90, Fiberglass Cable Tray	174.88	52.68
		For 9" Rung Spacing, Add	*3.36*	
		For 6" Rung Spacing, Add	*14.39*	
		For 4" Rung Spacing, Add	*26.38*	
		For 18" Rung Spacing, Deduct	*-2.40*	
		For Solid Bottom, Add	*40.62*	
		For Vented Trough Bottom, Add	*48.24*	
		For 60 Degree Bend, Deduct	*-39.55*	
		For 45 Degree Bend, Deduct	*-54.05*	
		For 30 Degree Bend, Deduct	*-68.55*	

26 05 36 00-2541 Horizontal Tees *(26 05 36 00-2516)*

26 05 36 00-2542	EA	6" Horizontal Tee, Fiberglass Cable Tray	151.78	56.40
		For 9" Rung Spacing, Add	*2.35*	
		For 6" Rung Spacing, Add	*10.08*	
		For 4" Rung Spacing, Add	*18.47*	
		For 18" Rung Spacing, Deduct	*-1.68*	
		For Solid Bottom, Add	*32.84*	
		For Vented Trough Bottom, Add	*37.45*	
26 05 36 00-2543	EA	9" Horizontal Tee, Fiberglass Cable Tray	169.11	66.22
		For 9" Rung Spacing, Add	*2.44*	
		For 6" Rung Spacing, Add	*10.48*	
		For 4" Rung Spacing, Add	*19.21*	
		For 18" Rung Spacing, Deduct	*-1.75*	
		For Solid Bottom, Add	*35.84*	
		For Vented Trough Bottom, Add	*40.34*	
26 05 36 00-2544	EA	12" Horizontal Tee, Fiberglass Cable Tray	190.96	78.96
		For 9" Rung Spacing, Add	*2.54*	
		For 6" Rung Spacing, Add	*10.88*	
		For 4" Rung Spacing, Add	*19.94*	
		For 18" Rung Spacing, Deduct	*-1.81*	
		For Solid Bottom, Add	*39.52*	
		For Vented Trough Bottom, Add	*43.81*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-2545	EA	18" Horizontal Tee, Fiberglass Cable Tray	212.89	88.77
		For 9" Rung Spacing, Add	*2.79*	
		For 6" Rung Spacing, Add	*11.97*	
		For 4" Rung Spacing, Add	*21.94*	
		For 18" Rung Spacing, Deduct	*-1.99*	
		For Solid Bottom, Add	*43.90*	
		For Vented Trough Bottom, Add	*48.55*	
26 05 36 00-2546	EA	24" Horizontal Tee, Fiberglass Cable Tray	224.36	92.50
		For 9" Rung Spacing, Add	*3.00*	
		For 6" Rung Spacing, Add	*12.84*	
		For 4" Rung Spacing, Add	*23.54*	
		For 18" Rung Spacing, Deduct	*-2.14*	
		For Solid Bottom, Add	*46.50*	
		For Vented Trough Bottom, Add	*51.59*	
26 05 36 00-2547	EA	30" Horizontal Tee, Fiberglass Cable Tray	241.23	97.80
		For 9" Rung Spacing, Add	*3.31*	
		For 6" Rung Spacing, Add	*14.19*	
		For 4" Rung Spacing, Add	*26.01*	
		For 18" Rung Spacing, Deduct	*-2.36*	
		For Solid Bottom, Add	*50.37*	
		For Vented Trough Bottom, Add	*56.17*	
26 05 36 00-2548	EA	36" Horizontal Tee, Fiberglass Cable Tray	262.42	105.36
		For 9" Rung Spacing, Add	*3.66*	
		For 6" Rung Spacing, Add	*15.67*	
		For 4" Rung Spacing, Add	*28.73*	
		For 18" Rung Spacing, Deduct	*-2.61*	
		For Solid Bottom, Add	*55.04*	
		For Vented Trough Bottom, Add	*61.54*	

26 05 36 00-2549 Horizontal Crosses *(26 05 36 00-2516)*

26 05 36 00-2550	EA	6" Horizontal Cross, Fiberglass Cable Tray	232.74	97.80
		For 9" Rung Spacing, Add	*3.01*	
		For 6" Rung Spacing, Add	*12.92*	
		For 4" Rung Spacing, Add	*23.68*	
		For 18" Rung Spacing, Deduct	*-2.15*	
		For Solid Bottom, Add	*47.83*	
		For Vented Trough Bottom, Add	*52.77*	
26 05 36 00-2551	EA	9" Horizontal Cross, Fiberglass Cable Tray	246.57	105.36
		For 9" Rung Spacing, Add	*3.10*	
		For 6" Rung Spacing, Add	*13.30*	
		For 4" Rung Spacing, Add	*24.38*	
		For 18" Rung Spacing, Deduct	*-2.22*	
		For Solid Bottom, Add	*50.28*	
		For Vented Trough Bottom, Add	*55.20*	
26 05 36 00-2552	EA	12" Horizontal Cross, Fiberglass Cable Tray	260.40	112.91
		For 9" Rung Spacing, Add	*3.19*	
		For 6" Rung Spacing, Add	*13.68*	
		For 4" Rung Spacing, Add	*25.08*	
		For 18" Rung Spacing, Deduct	*-2.28*	
		For Solid Bottom, Add	*52.74*	
		For Vented Trough Bottom, Add	*57.63*	
26 05 36 00-2553	EA	18" Horizontal Cross, Fiberglass Cable Tray	278.95	120.36
		For 9" Rung Spacing, Add	*3.45*	
		For 6" Rung Spacing, Add	*14.77*	
		For 4" Rung Spacing, Add	*27.08*	
		For 18" Rung Spacing, Deduct	*-2.46*	
		For Solid Bottom, Add	*56.61*	
		For Vented Trough Bottom, Add	*61.95*	
26 05 36 00-2554	EA	24" Horizontal Cross, Fiberglass Cable Tray	295.80	127.91
		For 9" Rung Spacing, Add	*3.64*	
		For 6" Rung Spacing, Add	*15.61*	
		For 4" Rung Spacing, Add	*28.61*	
		For 18" Rung Spacing, Deduct	*-2.60*	
		For Solid Bottom, Add	*59.98*	
		For Vented Trough Bottom, Add	*65.59*	
26 05 36 00-2555	EA	30" Horizontal Cross, Fiberglass Cable Tray	316.30	135.47
		For 9" Rung Spacing, Add	*3.96*	
		For 6" Rung Spacing, Add	*16.99*	
		For 4" Rung Spacing, Add	*31.15*	
		For 18" Rung Spacing, Deduct	*-2.83*	
		For Solid Bottom, Add	*64.43*	
		For Vented Trough Bottom, Add	*70.68*	
26 05 36 00-2556	EA	36" Horizontal Cross, Fiberglass Cable Tray	342.83	145.18
		For 9" Rung Spacing, Add	*4.38*	
		For 6" Rung Spacing, Add	*18.77*	
		For 4" Rung Spacing, Add	*34.41*	
		For 18" Rung Spacing, Deduct	*-3.13*	
		For Solid Bottom, Add	*70.19*	
		For Vented Trough Bottom, Add	*77.26*	

26 05 36 00-2557 Horizontal Wyes *(26 05 36 00-2516)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-2558	EA	6" Horizontal Wye, Fiberglass Cable Tray	144.99	56.40
		For 9" Rung Spacing, Add	*2.11*	
		For 6" Rung Spacing, Add	*9.06*	
		For 4" Rung Spacing, Add	*16.61*	
		For 18" Rung Spacing, Deduct	*-1.51*	
		For Solid Bottom, Add	*30.81*	
		For Vented Trough Bottom, Add	*34.73*	
26 05 36 00-2559	EA	9" Horizontal Wye, Fiberglass Cable Tray	153.07	60.23
		For 9" Rung Spacing, Add	*2.20*	
		For 6" Rung Spacing, Add	*9.42*	
		For 4" Rung Spacing, Add	*17.28*	
		For 18" Rung Spacing, Deduct	*-1.57*	
		For Solid Bottom, Add	*32.39*	
		For Vented Trough Bottom, Add	*36.41*	
26 05 36 00-2560	EA	12" Horizontal Wye, Fiberglass Cable Tray	183.68	78.96
		For 9" Rung Spacing, Add	*2.28*	
		For 6" Rung Spacing, Add	*9.79*	
		For 4" Rung Spacing, Add	*17.94*	
		For 18" Rung Spacing, Deduct	*-1.63*	
		For Solid Bottom, Add	*37.34*	
		For Vented Trough Bottom, Add	*40.90*	
26 05 36 00-2561	EA	18" Horizontal Wye, Fiberglass Cable Tray	204.90	88.77
		For 9" Rung Spacing, Add	*2.51*	
		For 6" Rung Spacing, Add	*10.77*	
		For 4" Rung Spacing, Add	*19.74*	
		For 18" Rung Spacing, Deduct	*-1.79*	
		For Solid Bottom, Add	*41.50*	
		For Vented Trough Bottom, Add	*45.35*	
26 05 36 00-2562	EA	24" Horizontal Wye, Fiberglass Cable Tray	215.63	92.50
		For 9" Rung Spacing, Add	*2.69*	
		For 6" Rung Spacing, Add	*11.53*	
		For 4" Rung Spacing, Add	*21.14*	
		For 18" Rung Spacing, Deduct	*-1.92*	
		For Solid Bottom, Add	*43.88*	
		For Vented Trough Bottom, Add	*48.10*	
26 05 36 00-2563	EA	30" Horizontal Wye, Fiberglass Cable Tray	231.77	97.80
		For 9" Rung Spacing, Add	*2.98*	
		For 6" Rung Spacing, Add	*12.77*	
		For 4" Rung Spacing, Add	*23.41*	
		For 18" Rung Spacing, Deduct	*-2.13*	
		For Solid Bottom, Add	*47.54*	
		For Vented Trough Bottom, Add	*52.38*	
26 05 36 00-2564	EA	36" Horizontal Wye, Fiberglass Cable Tray	251.98	105.36
		For 9" Rung Spacing, Add	*3.29*	
		For 6" Rung Spacing, Add	*14.11*	
		For 4" Rung Spacing, Add	*25.86*	
		For 18" Rung Spacing, Deduct	*-2.35*	
		For Solid Bottom, Add	*51.90*	
		For Vented Trough Bottom, Add	*57.36*	
26 05 36 00-2565		**Straight Reducers** *(26 05 36 00-2516)*		
26 05 36 00-2566	EA	9" To 6" Reducer, Fiberglass Cable Tray	68.04	22.56
		For 9" Rung Spacing, Add	*1.20*	
		For 6" Rung Spacing, Add	*5.13*	
		For 4" Rung Spacing, Add	*9.41*	
		For 18" Rung Spacing, Deduct	*-0.86*	
		For Solid Bottom, Add	*15.34*	
		For Vented Trough Bottom, Add	*17.91*	
26 05 36 00-2567	EA	12" To 9" Reducer, Fiberglass Cable Tray	74.17	26.28
		For 9" Rung Spacing, Add	*1.21*	
		For 6" Rung Spacing, Add	*5.21*	
		For 4" Rung Spacing, Add	*9.54*	
		For 18" Rung Spacing, Deduct	*-0.87*	
		For Solid Bottom, Add	*16.33*	
		For Vented Trough Bottom, Add	*18.81*	
26 05 36 00-2568	EA	18" To 12" Reducer, Fiberglass Cable Tray	80.29	30.12
		For 9" Rung Spacing, Add	*1.23*	
		For 6" Rung Spacing, Add	*5.28*	
		For 4" Rung Spacing, Add	*9.67*	
		For 18" Rung Spacing, Deduct	*-0.88*	
		For Solid Bottom, Add	*17.32*	
		For Vented Trough Bottom, Add	*19.71*	
26 05 36 00-2569	EA	24" To 18" Reducer, Fiberglass Cable Tray	86.01	33.05
		For 9" Rung Spacing, Add	*1.27*	
		For 6" Rung Spacing, Add	*5.46*	
		For 4" Rung Spacing, Add	*10.00*	
		For 18" Rung Spacing, Deduct	*-0.91*	
		For Solid Bottom, Add	*18.36*	
		For Vented Trough Bottom, Add	*20.76*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-2570	EA	30" To 24" Reducer, Fiberglass Cable Tray	96.58	36.10
		For 9" Rung Spacing, Add	*1.49*	
		For 6" Rung Spacing, Add	*6.37*	
		For 4" Rung Spacing, Add	*11.67*	
		For 18" Rung Spacing, Deduct	*-1.06*	
		For Solid Bottom, Add	*20.85*	
		For Vented Trough Bottom, Add	*23.74*	
26 05 36 00-2571	EA	36" To 30" Reducer, Fiberglass Cable Tray	109.08	39.94
		For 9" Rung Spacing, Add	*1.73*	
		For 6" Rung Spacing, Add	*7.40*	
		For 4" Rung Spacing, Add	*13.56*	
		For 18" Rung Spacing, Deduct	*-1.23*	
		For Solid Bottom, Add	*23.76*	
		For Vented Trough Bottom, Add	*27.19*	
26 05 36 00-2572		**Vertical Tees** *(26 05 36 00-2516)*		
26 05 36 00-2573	EA	6" Vertical Tee, Fiberglass Cable Tray	212.90	56.40
		For 9" Rung Spacing, Add	*4.49*	
		For 6" Rung Spacing, Add	*19.25*	
		For 4" Rung Spacing, Add	*35.28*	
		For 18" Rung Spacing, Deduct	*-3.21*	
		For Solid Bottom, Add	*51.18*	
		For Vented Trough Bottom, Add	*61.90*	
26 05 36 00-2574	EA	9" Vertical Tee, Fiberglass Cable Tray	220.12	60.23
		For 9" Rung Spacing, Add	*4.55*	
		For 6" Rung Spacing, Add	*19.48*	
		For 4" Rung Spacing, Add	*35.72*	
		For 18" Rung Spacing, Deduct	*-3.25*	
		For Solid Bottom, Add	*52.50*	
		For Vented Trough Bottom, Add	*63.23*	
26 05 36 00-2575	EA	12" Vertical Tee, Fiberglass Cable Tray	249.89	78.96
		For 9" Rung Spacing, Add	*4.60*	
		For 6" Rung Spacing, Add	*19.72*	
		For 4" Rung Spacing, Add	*36.15*	
		For 18" Rung Spacing, Deduct	*-3.29*	
		For Solid Bottom, Add	*57.20*	
		For Vented Trough Bottom, Add	*67.39*	
26 05 36 00-2576	EA	18" Vertical Tee, Fiberglass Cable Tray	268.20	88.77
		For 9" Rung Spacing, Add	*4.73*	
		For 6" Rung Spacing, Add	*20.26*	
		For 4" Rung Spacing, Add	*37.15*	
		For 18" Rung Spacing, Deduct	*-3.38*	
		For Solid Bottom, Add	*60.49*	
		For Vented Trough Bottom, Add	*70.67*	
26 05 36 00-2577	EA	24" Vertical Tee, Fiberglass Cable Tray	277.23	92.50
		For 9" Rung Spacing, Add	*4.85*	
		For 6" Rung Spacing, Add	*20.77*	
		For 4" Rung Spacing, Add	*38.08*	
		For 18" Rung Spacing, Deduct	*-3.46*	
		For Solid Bottom, Add	*62.36*	
		For Vented Trough Bottom, Add	*72.74*	
26 05 36 00-2578	EA	30" Vertical Tee, Fiberglass Cable Tray	288.28	97.80
		For 9" Rung Spacing, Add	*4.96*	
		For 6" Rung Spacing, Add	*21.25*	
		For 4" Rung Spacing, Add	*38.95*	
		For 18" Rung Spacing, Deduct	*-3.54*	
		For Solid Bottom, Add	*64.49*	
		For Vented Trough Bottom, Add	*74.99*	
26 05 36 00-2579	EA	36" Vertical Tee, Fiberglass Cable Tray	314.41	105.36
		For 9" Rung Spacing, Add	*5.48*	
		For 6" Rung Spacing, Add	*23.47*	
		For 4" Rung Spacing, Add	*43.03*	
		For 18" Rung Spacing, Deduct	*-3.91*	
		For Solid Bottom, Add	*70.63*	
		For Vented Trough Bottom, Add	*82.33*	
26 05 36 00-2580		**Flextray™ Cable Tray** *(26 05 36 00-0001)*		
26 05 36 00-2581		**Flextray™ Cable Tray Straight Sections** *(26 05 36 00-2580)*		
		Note: Includes splicing and splice bars.		
26 05 36 00-2582	LF	2" Deep x 2" Wide Flextray™ Cable, Electroplated Zinc Galvanized Finish	18.95	7.11
26 05 36 00-2583	LF	2" Deep x 4" Wide Flextray™ Cable, Electroplated Zinc Galvanized Finish	23.04	7.58
26 05 36 00-2584	LF	2" Deep x 6" Wide Flextray™ Cable, Electroplated Zinc Galvanized Finish	24.19	7.92
26 05 36 00-2585	LF	2" Deep x 8" Wide Flextray™ Cable, Electroplated Zinc Galvanized Finish	25.42	8.32
26 05 36 00-2586	LF	2" Deep x 12" Wide Flextray™ Cable, Electroplated Zinc Galvanized Finish	27.13	8.73
26 05 36 00-2587	LF	2" Deep x 16" Wide Flextray™ Cable, Electroplated Zinc Galvanized Finish	29.01	9.14
26 05 36 00-2588	LF	2" Deep x 18" Wide Flextray™ Cable, Electroplated Zinc Galvanized Finish	29.78	9.54
26 05 36 00-2589	LF	2" Deep x 20" Wide Flextray™ Cable, Electroplated Zinc Galvanized Finish	30.87	9.81
26 05 36 00-2590	LF	2" Deep x 24" Wide Flextray™ Cable, Electroplated Zinc Galvanized Finish	31.56	10.08
26 05 36 00-2591	LF	4" Deep x 4" Wide Flextray™ Cable, Electroplated Zinc Galvanized Finish	24.28	8.35
26 05 36 00-2592	LF	4" Deep x 6" Wide Flextray™ Cable, Electroplated Zinc Galvanized Finish	26.23	8.68
26 05 36 00-2593	LF	4" Deep x 8" Wide Flextray™ Cable, Electroplated Zinc Galvanized Finish	28.30	9.14
26 05 36 00-2594	LF	4" Deep x 12" Wide Flextray™ Cable, Electroplated Zinc Galvanized Finish	29.97	9.59

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 36 00-2595	LF	4" Deep x 16" Wide Flextray™ Cable, Electroplated Zinc Galvanized Finish	31.80	10.04
26 05 36 00-2596	LF	4" Deep x 18" Wide Flextray™ Cable, Electroplated Zinc Galvanized Finish	34.14	10.49
26 05 36 00-2597	LF	4" Deep x 20" Wide Flextray™ Cable, Electroplated Zinc Galvanized Finish	35.97	10.83
26 05 36 00-2598	LF	4" Deep x 24" Wide Flextray™ Cable, Electroplated Zinc Galvanized Finish	37.34	11.06
26 05 36 00-2599	LF	4" Deep x 30" Wide Flextray™ Cable, Electroplated Zinc Galvanized Finish	46.24	11.85
26 05 36 00-2600	LF	6" Deep x 8" Wide Flextray™ Cable, Electroplated Zinc Galvanized Finish	31.32	10.04
26 05 36 00-2601	LF	6" Deep x 12" Wide Flextray™ Cable, Electroplated Zinc Galvanized Finish	35.11	10.49
26 05 36 00-2602	LF	6" Deep x 16" Wide Flextray™ Cable, Electroplated Zinc Galvanized Finish	36.73	10.95
26 05 36 00-2603	LF	6" Deep x 18" Wide Flextray™ Cable, Electroplated Zinc Galvanized Finish	39.39	11.51
26 05 36 00-2604	LF	6" Deep x 20" Wide Flextray™ Cable, Electroplated Zinc Galvanized Finish	40.64	11.73
26 05 36 00-2605	LF	6" Deep x 24" Wide Flextray™ Cable, Electroplated Zinc Galvanized Finish	48.45	12.07
26 05 36 00-2606		Flextray™ Cable Tray Bends *(26 05 36 00-2580)*		
		Note: Includes field fabricated bend and 90 degree kit.		
26 05 36 00-2607	EA	2" Deep x 2" Wide Flextray™ Cable Bend, Electroplated Zinc Galvanized Finish Note: Field Fabricated	14.24	5.30
26 05 36 00-2608	EA	2" Deep x 4" Wide Flextray™ Cable Bend, Electroplated Zinc Galvanized Finish Note: Field Fabricated	17.28	5.64
26 05 36 00-2609	EA	2" Deep x 6" Wide Flextray™ Cable Bend, Electroplated Zinc Galvanized Finish Note: Field Fabricated	24.19	7.90
26 05 36 00-2610	EA	2" Deep x 8" Wide Flextray™ Cable Bend, Electroplated Zinc Galvanized Finish Note: Field Fabricated	38.20	12.52
26 05 36 00-2611	EA	2" Deep x 12" Wide Flextray™ Cable Bend, Electroplated Zinc Galvanized Finish Note: Field Fabricated	54.26	17.48
26 05 36 00-2612	EA	2" Deep x 16" Wide Flextray™ Cable Bend, Electroplated Zinc Galvanized Finish Note: Field Fabricated	72.56	22.89
26 05 36 00-2613	EA	2" Deep x 18" Wide Flextray™ Cable Bend, Electroplated Zinc Galvanized Finish Note: Field Fabricated	84.48	28.65
26 05 36 00-2614	EA	2" Deep x 20" Wide Flextray™ Cable Bend, Electroplated Zinc Galvanized Finish Note: Field Fabricated	100.83	34.40
26 05 36 00-2615	EA	2" Deep x 24" Wide Flextray™ Cable Bend, Electroplated Zinc Galvanized Finish Note: Field Fabricated	126.24	40.39
26 05 36 00-2616	EA	4" Deep x 4" Wide Flextray™ Cable Bend, Electroplated Zinc Galvanized Finish Note: Field Fabricated	18.16	6.20
26 05 36 00-2617	EA	4" Deep x 6" Wide Flextray™ Cable Bend, Electroplated Zinc Galvanized Finish Note: Field Fabricated	26.27	8.68
26 05 36 00-2618	EA	4" Deep x 8" Wide Flextray™ Cable Bend, Electroplated Zinc Galvanized Finish Note: Field Fabricated	42.42	13.76
26 05 36 00-2619	EA	4" Deep x 12" Wide Flextray™ Cable Bend, Electroplated Zinc Galvanized Finish Note: Field Fabricated	59.97	19.18
26 05 36 00-2620	EA	4" Deep x 16" Wide Flextray™ Cable Bend, Electroplated Zinc Galvanized Finish Note: Field Fabricated	79.46	25.15
26 05 36 00-2621	EA	4" Deep x 18" Wide Flextray™ Cable Bend, Electroplated Zinc Galvanized Finish Note: Field Fabricated	96.60	31.47
26 05 36 00-2622	EA	4" Deep x 20" Wide Flextray™ Cable Bend, Electroplated Zinc Galvanized Finish Note: Field Fabricated	116.87	37.79
26 05 36 00-2623	EA	4" Deep x 24" Wide Flextray™ Cable Bend, Electroplated Zinc Galvanized Finish Note: Field Fabricated	149.42	44.34
26 05 36 00-2624	EA	4" Deep x 30" Wide Flextray™ Cable Bend, Electroplated Zinc Galvanized Finish Note: Field Fabricated	231.26	59.22
26 05 36 00-2625	EA	6" Deep x 8" Wide Flextray™ Cable Bend, Electroplated Zinc Galvanized Finish Note: Field Fabricated	46.93	15.01
26 05 36 00-2626	EA	6" Deep x 12" Wide Flextray™ Cable Bend, Electroplated Zinc Galvanized Finish Note: Field Fabricated	70.25	20.98
26 05 36 00-2627	EA	6" Deep x 16" Wide Flextray™ Cable Bend, Electroplated Zinc Galvanized Finish Note: Field Fabricated	91.84	27.42
26 05 36 00-2628	EA	6" Deep x 18" Wide Flextray™ Cable Bend, Electroplated Zinc Galvanized Finish Note: Field Fabricated	111.11	34.40
26 05 36 00-2629	EA	6" Deep x 20" Wide Flextray™ Cable Bend, Electroplated Zinc Galvanized Finish Note: Field Fabricated	131.72	41.17
26 05 36 00-2630	EA	6" Deep x 24" Wide Flextray™ Cable Bend, Electroplated Zinc Galvanized Finish Note: Field Fabricated	193.77	48.40
26 05 36 00-2631		Flextray™ Cable Tray Brackets *(26 05 36 00-2580)*		
26 05 36 00-2632	EA	6" Shelf Bracket, Electroplated Zinc Galvanized Finish, Flextray™	36.37	14.89
26 05 36 00-2633	EA	8" Shelf Bracket, Electroplated Zinc Galvanized Finish, Flextray™	38.28	14.89
26 05 36 00-2634	EA	12" Shelf Bracket, Electroplated Zinc Galvanized Finish, Flextray™	41.53	14.89
26 05 36 00-2635	EA	16" Shelf Bracket, Electroplated Zinc Galvanized Finish, Flextray™	49.71	16.24
26 05 36 00-2636	EA	18" Shelf Bracket, Electroplated Zinc Galvanized Finish, Flextray™	52.55	16.24
26 05 36 00-2637	EA	20" Shelf Bracket, Electroplated Zinc Galvanized Finish, Flextray™	53.50	16.24
26 05 36 00-2638	EA	24" Shelf Bracket, Electroplated Zinc Galvanized Finish, Flextray™	54.34	16.24

26 05 39 Underfloor Raceways for Electrical Systems *(26 05)*

26 05 39 00-0001 Underfloor Ducts *(26 05 39)*

26 05 39 00-0002 Straight Duct Sections 10' Long, 14 Gauge Steel *(26 05 39 00-0001)*

26 05 39 00-0003 Standard Ducts, 3.8 Square Inches *(26 05 39 00-0002)*

26 05 39 00-0004	EA	Standard Underfloor Straight Duct Blank Without Inserts, 10' Long, 14 Gauge, 3.8 Square Inches	92.05	19.86

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 39 00-0005	EA	Standard Underfloor Straight Duct With 7/8" Inserts On 24" Centers, 10' Long, 14 Gauge, 3.8 Square Inches	115.55	23.24
26 05 39 00-0006		**Large Capacity Ducts, 8.9 Square Inches** *(26 05 39 00-0002)*		
26 05 39 00-0007	EA	Large Capacity Underfloor Straight Duct Blank Without Inserts, 10' Long, 14 Gauge, 8.9 Square Inches	151.80	25.15
26 05 39 00-0008	EA	Large Capacity Underfloor Straight Duct With 7/8" Inserts On 24" Centers, 10' Long, 14 Gauge, 8.9 Square Inches	173.67	27.87
26 05 39 00-0009		**Junction Boxes** *(26 05 39 00-0001)*		
26 05 39 00-0010		**One Level Junction Boxes** *(26 05 39 00-0009)*		
26 05 39 00-0011	EA	1 Level UF Duct Junction Box, 1 Standard Duct Without Partitions In Box	231.62	39.48
26 05 39 00-0012	EA	1 Level UF Duct Junction Box, 1 Large Duct Without Partitions In Box	261.74	42.30
26 05 39 00-0013	EA	1 Level UF Duct Junction Box, 1 Standard And Large Duct Per Side With Partitions In Box. Note: Isolate each duct and form a continuous raceway through the box in both directions.	415.34	39.48
26 05 39 00-0014	EA	1 Level UF Duct Junction Box, 2 Standard Ducts Per Side With Partitions In Box	285.70	42.30
26 05 39 00-0015	EA	1 Level UF Duct Junction Box, 3 Standard Ducts Per Side With Partitions In Box	451.17	55.61
26 05 39 00-0016	EA	1 Level UF Duct Junction Box, 2 Large Ducts Per Side With Partitions In Box Duct	629.51	60.46
26 05 39 00-0017		**Two Level Junction Boxes** *(26 05 39 00-0009)*		
26 05 39 00-0018	EA	2 Level UF Duct Junction Box, 2 Standard Duct Cross, Intersects At Right Angles, Raceway Bottom Level. Note: Accepts two standard ducts to form a continuous raceway at right angles to the top level raceway.	948.69	39.94
26 05 39 00-0019	EA	2 Level UF Duct Junction Box, 2 Large Duct Bottom Level: Accepts Two Large Capacity Ducts	1,090.83	42.30
26 05 39 00-0020		**Elbow Fittings** *(26 05 39 00-0001)*		
26 05 39 00-0021		**90 Degree Horizontal Elbow** *(26 05 39 00-0020)*		
26 05 39 00-0022	EA	Underfloor Standard Duct Horizontal Elbow Fitting, 90 Degree	112.18	14.55
26 05 39 00-0023	EA	Underfloor Large Duct Horizontal Elbow Fitting, 90 Degree	115.47	14.55
26 05 39 00-0024		**90 Degree Vertical Elbow** *(26 05 39 00-0020)*		
26 05 39 00-0025	EA	Underfloor Standard Duct Vertical Elbow Fitting, 90 Degree	64.26	14.55
26 05 39 00-0026	EA	Underfloor Large Duct Vertical Elbow Fitting, 90 Degree	65.58	14.55
26 05 39 00-0027		**Offset Elbow** *(26 05 39 00-0020)* Note: Two elbows required for crossover or crossunder.		
26 05 39 00-0028	EA	Underfloor Standard Duct Offset Elbow 45 Degree, 2 Required For Over-Under	64.26	16.92
26 05 39 00-0029	EA	Underfloor Large Duct Offset Elbow 45 Degree, 2 Required For Over-Under	65.58	16.92
26 05 39 00-0030		**Couplings** *(26 05 39 00-0001)*		
26 05 39 00-0031		**Sleeve Couplings** *(26 05 39 00-0030)*		
26 05 39 00-0032	EA	Underfloor Standard Duct Sleeve Coupling	42.80	22.56
26 05 39 00-0033	EA	Underfloor Large Duct Sleeve Coupling	67.07	22.56
26 05 39 00-0034		**Expansion Couplings** *(26 05 39 00-0030)*		
26 05 39 00-0035	EA	Underfloor Standard Duct Expansion Coupling	92.75	22.56
26 05 39 00-0036	EA	Underfloor Large Duct Expansion Coupling	94.39	23.80
26 05 39 00-0037		**Reducing Couplings** *(26 05 39 00-0030)*		
26 05 39 00-0038	EA	Reducing Coupling, Large To Standard Duct Underfloor Duct Coupling	85.15	3.39
26 05 39 00-0039		**Duct Supports** *(26 05 39 00-0001)*		
26 05 39 00-0040		**Combination Support And Coupling** *(26 05 39 00-0039)* Note: Includes leveling legs and anchoring feet.		
26 05 39 00-0041	EA	1 Standard Duct Support And Coupling With Legs With Leveling Legs And Anchor Feet	98.43	47.37
26 05 39 00-0042	EA	2 Standard Duct Support And Coupling With Legs With Leveling Legs And Anchor Feet	109.97	47.37
26 05 39 00-0043	EA	3 Standard Duct Support And Coupling With Legs With Leveling Legs And Anchor Feet	121.59	47.37
26 05 39 00-0044	EA	1 Large Duct Support And Coupling With Legs With Leveling Legs And Anchor Feet	109.97	53.02
26 05 39 00-0045	EA	2 Large Duct Support And Coupling With Legs With Leveling Legs And Anchor Feet	133.47	53.02
26 05 39 00-0046	EA	1 Standard And 1 Large Duct Support And Coupling With Leveling Legs And Anchor Feet	121.59	56.40
26 05 39 00-0047	EA	2 Standard And 1 Large Duct Support And Coupling With Leveling Legs And Anchor Feet	121.59	56.40
26 05 39 00-0048	EA	1 Standard And 2 Large Duct Support And Coupling With Leveling Legs And Anchor Feet	133.47	56.40
26 05 39 00-0049		**Duct Support Only** *(26 05 39 00-0039)* Note: Includes leveling legs and anchoring feet.		
26 05 39 00-0050	EA	1 Underfloor Duct Support Only With Leveling Legs And Anchor Feet	88.33	41.74
26 05 39 00-0051	EA	2 Underfloor Duct Support Only With Leveling Legs And Anchor Feet	103.84	41.74
26 05 39 00-0052	EA	3 Underfloor Duct Support Only With Leveling Legs And Anchor Feet	120.41	41.74

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 39 00-0053		Underfloor Duct Accessories *(26 05 39 00-0001)*		
26 05 39 00-0054		Plugs For Unused Junction Box Openings And Duct Ends *(26 05 39 00-0053)*		
26 05 39 00-0055	EA	Standard Plugs For Unused Junction Box Opening And Underfloor Duct Ends	30.84	3.39
26 05 39 00-0056	EA	Large Plugs For Unused Junction Box Opening And Underfloor Duct Ends	31.43	3.39
26 05 39 00-0057		Conduit Adapters *(26 05 39 00-0053)*		
26 05 39 00-0058	EA	One 1-1/4" Conduit To Standard Duct Underfloor Conduit To Duct, Adapter	33.36	5.64
26 05 39 00-0059	EA	Two 1-1/4" Conduit To Standard Duct Underfloor Conduit To Duct, Adapter	35.52	5.64
26 05 39 00-0060	EA	One 2" Conduit To Standard Duct Underfloor Conduit To Duct, Adapter	34.53	5.64
26 05 39 00-0061	EA	Three 1-1/4" Conduit To Large Duct Underfloor Conduit To Duct, Adapter	35.71	5.64
26 05 39 00-0062		Holders And Caps *(26 05 39 00-0053)*		
26 05 39 00-0063	EA	Tile Holder, Underfloor Duct Accessories	219.46	47.37
26 05 39 00-0064	EA	Terrazzo Holder, Underfloor Duct Accessories	409.31	47.37
26 05 39 00-0065	EA	Closing Caps For Inserts, Underfloor Duct Accessories	2.89	1.13
26 05 39 00-0066		Underfloor Dust Pans *(26 05 39 00-0001)*		
26 05 39 00-0067	EA	Underfloor Dust Carpet Pan	92.05	6.19

26 05 43 Underground Ducts and Raceways for Electrical Systems *(26 05)*

Note: Includes warning tape.

26 05 43 00-0001		Precast Concrete Trenches, One Piece Pedestrian Trench *(26 05 43)* Note: Rated for 200 pounds per square foot (PSF) Pedestrian Weight. Excludes excavation, removal of dirt and sand bedding.		
26 05 43 00-0002		10" Wide Pedestrian Trench *(26 05 43 00-0001)*		
26 05 43 00-0003	LF	Base, Solid Bottom 10" Wide x 15" Deep Pedestrian Trench	94.89	
26 05 43 00-0004	LF	Base, Open Bottom 10" Wide x 15" Deep Pedestrian Trench	90.76	
26 05 43 00-0005	LF	Base, Solid Bottom 10" Wide x 24" Deep Pedestrian Trench	131.79	
26 05 43 00-0006	LF	Base, Open Bottom 10" Wide x 24" Deep Pedestrian Trench	126.05	
26 05 43 00-0007	EA	End Wall, 10" Wide x 15" Deep Pedestrian Trench	64.27	
26 05 43 00-0008	EA	End Wall, 10" Wide x 24" Deep Pedestrian Trench	76.19	
26 05 43 00-0009	LF	Lid, Concrete, 10" Wide Pedestrian Trench	63.26	
26 05 43 00-0010		20" Wide Pedestrian Trench *(26 05 43 00-0001)*		
26 05 43 00-0011	LF	Base, Solid Bottom 20" Wide x 15" Deep Pedestrian Trench	120.31	
26 05 43 00-0012	LF	Base, Open Bottom 20" Wide x 15" Deep Pedestrian Trench	112.99	
26 05 43 00-0013	LF	Base, Solid Bottom 20" Wide x 24" Deep Pedestrian Trench	163.04	
26 05 43 00-0014	LF	Base, Open Bottom 20" Wide x 24" Deep Pedestrian Trench	156.37	
26 05 43 00-0015	EA	End Wall, 20" Wide x 15" Deep Pedestrian Trench	80.43	
26 05 43 00-0016	EA	End Wall, 20" Wide x 24" Deep Pedestrian Trench	117.21	
26 05 43 00-0017	LF	Lid, Concrete, 20" Wide Pedestrian Trench	79.11	
26 05 43 00-0018		30" Wide Pedestrian Trench *(26 05 43 00-0001)*		
26 05 43 00-0019	LF	Base, Solid Bottom 30" Wide x 15" Deep Pedestrian Trench	153.71	
26 05 43 00-0020	LF	Base, Open Bottom 30" Wide x 15" Deep Pedestrian Trench	180.51	
26 05 43 00-0021	LF	Base, Solid Bottom 30" Wide x 24" Deep Pedestrian Trench	192.32	
26 05 43 00-0022	LF	Base, Open Bottom 30" Wide x 24" Deep Pedestrian Trench	184.73	
26 05 43 00-0023	EA	End Wall, 30" Wide x 15" Deep Pedestrian Trench	115.44	
26 05 43 00-0024	EA	End Wall, 30" Wide x 24" Deep Pedestrian Trench	156.54	
26 05 43 00-0025	LF	Lid, Concrete, 30" Wide Pedestrian Trench	98.75	
26 05 43 00-0026		40" Wide Pedestrian Trench *(26 05 43 00-0001)*		
26 05 43 00-0027	LF	Base, Solid Bottom 40" Wide x 15" Deep Pedestrian Trench	184.19	
26 05 43 00-0028	LF	Base, Open Bottom 40" Wide x 15" Deep Pedestrian Trench	177.29	
26 05 43 00-0029	LF	Base, Solid Bottom 40" Wide x 24" Deep Pedestrian Trench	225.39	
26 05 43 00-0030	LF	Base, Open Bottom 40" Wide x 24" Deep Pedestrian Trench	216.95	
26 05 43 00-0031	EA	End Wall, 40" Wide x 15" Deep Pedestrian Trench	147.77	
26 05 43 00-0032	EA	End Wall, 40" Wide x 24" Deep Pedestrian Trench	200.14	
26 05 43 00-0033	LF	Lid, Concrete, 40" Wide Pedestrian Trench	116.74	
26 05 43 00-0034		Precast Concrete Trenches, One Piece Medium Vehicle Trench *(26 05 43)* Note: Rated for 7,000 Lb. Gross Vehicle Weight. Excludes excavation, removal of dirt and sand bedding.		
26 05 43 00-0035		10" Wide Medium Vehicle Trench *(26 05 43 00-0034)*		
26 05 43 00-0036	LF	Base, Solid Bottom 10" Wide x 15" Deep Medium Vehicle Trench	115.19	
26 05 43 00-0037	LF	Base, Open Bottom 10" Wide x 15" Deep Medium Vehicle Trench	109.83	
26 05 43 00-0038	LF	Base, Solid Bottom 10" Wide x 24" Deep Medium Vehicle Trench	159.95	
26 05 43 00-0039	LF	Base Open Bottom 10" Wide x 24" Deep Medium Vehicle Trench	152.53	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 43 00-0040	EA	End Wall, 10" Wide x 15" Deep Medium Vehicle Trench	75.55	
26 05 43 00-0041	EA	End Wall, 10" Wide x 24" Deep Medium Vehicle Trench	88.01	
26 05 43 00-0042	LF	Lid, Concrete 10" Wide Medium Vehicle Trench	76.79	
26 05 43 00-0043	LF	Lid, Galvanized Steel 10" Wide Medium Vehicle Trench	341.06	
26 05 43 00-0044		**20" Wide Medium Vehicle Trench** *(26 05 43 00-0034)*		
26 05 43 00-0045	LF	Base, Solid Bottom 20" Wide x 15" Deep Medium Vehicle Trench	145.08	
26 05 43 00-0046	LF	Base, Open Bottom 20" Wide x 15" Deep Medium Vehicle Trench	135.65	
26 05 43 00-0047	LF	Base, Solid Bottom 20" Wide x 24" Deep Medium Vehicle Trench	195.71	
26 05 43 00-0048	LF	Base Open Bottom 20" Wide x 24" Deep Medium Vehicle Trench	187.09	
26 05 43 00-0049	EA	End Wall, 20" Wide x 15" Deep Medium Vehicle Trench	93.48	
26 05 43 00-0050	EA	End Wall, 20" Wide x 24" Deep Medium Vehicle Trench	136.42	
26 05 43 00-0051	LF	Lid, Concrete 20" Wide Medium Vehicle Trench	96.03	
26 05 43 00-0052	LF	Lid, Galvanized Steel 20" Wide Medium Vehicle Trench	452.29	
26 05 43 00-0053		**30" Wide Medium Vehicle Trench** *(26 05 43 00-0034)*		
26 05 43 00-0054	LF	Base, Solid Bottom 30" Wide x 15" Deep Medium Vehicle Trench	146.19	
26 05 43 00-0055	LF	Base, Open Bottom 30" Wide x 15" Deep Medium Vehicle Trench	175.28	
26 05 43 00-0056	LF	Base, Solid Bottom 30" Wide x 24" Deep Medium Vehicle Trench	229.50	
26 05 43 00-0057	LF	Base Open Bottom 30" Wide x 24" Deep Medium Vehicle Trench	219.69	
26 05 43 00-0058	EA	End Wall, 30" Wide x 15" Deep Medium Vehicle Trench	133.45	
26 05 43 00-0059	EA	End Wall, 30" Wide x 24" Deep Medium Vehicle Trench	183.19	
26 05 43 00-0060	LF	Lid, Concrete 30" Wide Medium Vehicle Trench	120.18	
26 05 43 00-0061	LF	Lid, Galvanized Steel 30" Wide Medium Vehicle Trench	564.62	
26 05 43 00-0062		**40" Wide Medium Vehicle Trench** *(26 05 43 00-0034)*		
26 05 43 00-0063	LF	Base, Solid Bottom 40" Wide x 15" Deep Medium Vehicle Trench	217.99	
26 05 43 00-0064	LF	Base, Open Bottom 40" Wide x 15" Deep Medium Vehicle Trench	209.07	
26 05 43 00-0065	LF	Base, Solid Bottom 40" Wide x 24" Deep Medium Vehicle Trench	266.84	
26 05 43 00-0066	LF	Base Open Bottom 40" Wide x 24" Deep Medium Vehicle Trench	255.91	
26 05 43 00-0067	EA	End Wall, 40" Wide x 15" Deep Medium Vehicle Trench	170.83	
26 05 43 00-0068	EA	End Wall, 40" Wide x 24" Deep Medium Vehicle Trench	234.18	
26 05 43 00-0069	LF	Lid, Concrete 40" Wide Medium Vehicle Trench	141.51	
26 05 43 00-0070	LF	Lid, Galvanized Steel 40" Wide Medium Vehicle Trench	767.63	
26 05 43 00-0071		**Precast Concrete Trenches, One Piece H20 Road Crossing Trench** *(26 05 43)*		
		Note: H20 Rated for 32,000 Lb. Gross Vehicle Weight. Excludes excavation, removal of dirt and sand bedding.		
26 05 43 00-0072		**10" Wide H20 Road Crossing Trench** *(26 05 43 00-0071)*		
26 05 43 00-0073	LF	Base, Solid Bottom for Concrete Lid, 10" Wide x 16" Deep Road Crossing Trench	249.01	
26 05 43 00-0074	LF	Base, Open Bottom for Concrete Lid, 10" Wide x 16" Deep Road Crossing Trench	236.98	
26 05 43 00-0075	LF	Base, Solid Bottom for Concrete Lid, 10" Wide x 24" Deep Road Crossing Trench	311.09	
26 05 43 00-0076	LF	Base, Open Bottom for Concrete Lid, 10" Wide x 24" Deep Road Crossing Trench	295.92	
26 05 43 00-0077	LF	Base, Solid Bottom for Galvanized Steel Lid, 10" Wide x 16" Deep Road Crossing Trench	239.10	
26 05 43 00-0078	LF	Base, Open Bottom for Galvanized Steel Lid, 10" Wide x 16" Deep Road Crossing Trench	227.65	
26 05 43 00-0079	LF	Base, Solid Bottom for Galvanized Steel Lid, 10" Wide x 24" Deep Road Crossing Trench	301.18	
26 05 43 00-0080	LF	Base, Open Bottom for Galvanized Steel Lid, 10" Wide x 24" Deep Road Crossing Trench	286.62	
26 05 43 00-0081	EA	End Wall for Concrete Lid, 10" Wide x 16" Deep Road Crossing Trench	164.74	
26 05 43 00-0082	EA	End Wall for Concrete Lid, 10" Wide x 24" Deep Road Crossing Trench	222.99	
26 05 43 00-0083	EA	End Wall for Galvanized Steel Lid, 10" Wide x 16" Deep Road Crossing Trench	149.02	
26 05 43 00-0084	EA	End Wall for Galvanized Steel Lid, 10" Wide x 24" Deep Road Crossing Trench	206.93	
26 05 43 00-0085	LF	Lid, Concrete 10" Wide Road Crossing Trench	114.96	
26 05 43 00-0086	LF	Lid, Galvanized Steel 10" Wide Road Crossing Trench	370.10	
26 05 43 00-0087		**20" Wide H20 Road Crossing Trench** *(26 05 43 00-0071)*		
26 05 43 00-0088	LF	Base, Solid Bottom for Concrete Lid, 20" Wide x 16" Deep Road Crossing Trench	264.04	
26 05 43 00-0089	LF	Base, Open Bottom for Concrete Lid, 20" Wide x 16" Deep Road Crossing Trench	251.70	
26 05 43 00-0090	LF	Base, Solid Bottom for Concrete Lid, 20" Wide x 24" Deep Road Crossing Trench	349.35	
26 05 43 00-0091	LF	Base, Open Bottom for Concrete Lid, 20" Wide x 24" Deep Road Crossing Trench	332.84	
26 05 43 00-0092	LF	Base, Solid Bottom for Galvanized Steel Lid, 20" Wide x 16" Deep Road Crossing Trench	264.04	
26 05 43 00-0093	LF	Base, Open Bottom for Galvanized Steel Lid, 20" Wide x 16" Deep Road Crossing Trench	251.70	
26 05 43 00-0094	LF	Base, Solid Bottom for Galvanized Steel Lid, 20" Wide x 24" Deep Road Crossing Trench	339.44	
26 05 43 00-0095	LF	Base, Open Bottom for Galvanized Steel Lid, 20" Wide x 24" Deep Road Crossing Trench	323.55	
26 05 43 00-0096	EA	End Wall for Concrete Lid, 20" Wide x 16" Deep Road Crossing Trench	235.30	
26 05 43 00-0097	EA	End Wall for Concrete Lid, 20" Wide x 24" Deep Road Crossing Trench	320.26	
26 05 43 00-0098	EA	End Wall for Galvanized Steel Lid, 20" Wide x 16" Deep Road Crossing Trench	212.40	
26 05 43 00-0099	EA	End Wall for Galvanized Steel Lid, 20" Wide x 24" Deep Road Crossing Trench	297.37	
26 05 43 00-0100	LF	Lid, Concrete 20" Wide Road Crossing Trench	128.22	
26 05 43 00-0101	LF	Lid, Galvanized Steel 20" Wide Road Crossing Trench	549.00	
26 05 43 00-0102		**30" Wide H20 Road Crossing Trench** *(26 05 43 00-0071)*		
26 05 43 00-0103	LF	Base, Solid Bottom for Concrete Lid, 30" Wide x 16" Deep Road Crossing Trench	311.87	
26 05 43 00-0104	LF	Base, Open Bottom for Concrete Lid, 30" Wide x 16" Deep Road Crossing Trench	297.75	
26 05 43 00-0105	LF	Base, Solid Bottom for Concrete Lid, 30" Wide x 24" Deep Road Crossing Trench	385.60	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 43 00-0106	LF	Base, Open Bottom for Concrete Lid, 30" Wide x 24" Deep Road Crossing Trench	368.07	
26 05 43 00-0107	LF	Base, Solid Bottom for Galvanized Steel Lid, 30" Wide x 16" Deep Road Crossing Trench	301.96	
26 05 43 00-0108	LF	Base, Open Bottom for Galvanized Steel Lid, 30" Wide x 16" Deep Road Crossing Trench	288.42	
26 05 43 00-0109	LF	Base, Solid Bottom for Galvanized Steel Lid, 30" Wide x 24" Deep Road Crossing Trench	375.69	
26 05 43 00-0110	LF	Base, Open Bottom for Galvanized Steel Lid, 30" Wide x 24" Deep Road Crossing Trench	358.43	
26 05 43 00-0111	EA	End Wall for Concrete Lid, 30" Wide x 16" Deep Road Crossing Trench	313.88	
26 05 43 00-0112	EA	End Wall for Concrete Lid, 30" Wide x 24" Deep Road Crossing Trench	415.57	
26 05 43 00-0113	EA	End Wall for Galvanized Steel Lid, 30" Wide x 16" Deep Road Crossing Trench	283.81	
26 05 43 00-0114	EA	End Wall for Galvanized Steel Lid, 30" Wide x 24" Deep Road Crossing Trench	385.49	
26 05 43 00-0115	LF	Lid, Concrete 30" Wide Road Crossing Trench	162.28	
26 05 43 00-0116	LF	Lid, Galvanized Steel 30" Wide Road Crossing Trench	688.43	

26 05 43 00-0117 40" Wide H20 Road Crossing Trench *(26 05 43 00-0071)*

26 05 43 00-0118	LF	Base, Solid Bottom for Concrete Lid, 40" Wide x 16" Deep Road Crossing Trench	344.36	
26 05 43 00-0119	LF	Base, Open Bottom for Concrete Lid, 40" Wide x 16" Deep Road Crossing Trench	329.19	
26 05 43 00-0120	LF	Base, Solid Bottom for Concrete Lid, 40" Wide x 24" Deep Road Crossing Trench	423.94	
26 05 43 00-0121	LF	Base, Open Bottom for Concrete Lid, 40" Wide x 24" Deep Road Crossing Trench	404.90	
26 05 43 00-0122	LF	Base, Solid Bottom for Galvanized Steel Lid, 40" Wide x 16" Deep Road Crossing Trench	334.45	
26 05 43 00-0123	LF	Base, Open Bottom for Galvanized Steel Lid, 40" Wide x 16" Deep Road Crossing Trench	319.89	
26 05 43 00-0124	LF	Base, Solid Bottom for Galvanized Steel Lid, 40" Wide x 24" Deep Road Crossing Trench	414.03	
26 05 43 00-0125	LF	Base, Open Bottom for Galvanized Steel Lid, 40" Wide x 24" Deep Road Crossing Trench	395.57	
26 05 43 00-0126	EA	End Wall for Concrete Lid, 40" Wide x 16" Deep Road Crossing Trench	389.54	
26 05 43 00-0127	EA	End Wall for Concrete Lid, 40" Wide x 24" Deep Road Crossing Trench	515.42	
26 05 43 00-0128	EA	End Wall for Galvanized Steel Lid, 40" Wide x 16" Deep Road Crossing Trench	352.63	
26 05 43 00-0129	EA	End Wall for Galvanized Steel Lid, 40" Wide x 24" Deep Road Crossing Trench	478.51	
26 05 43 00-0130	LF	Lid, Concrete 40" Wide Road Crossing Trench	196.02	
26 05 43 00-0131	LF	Lid, Galvanized Steel 40" Wide Road Crossing Trench	936.10	

26 05 43 00-0132 Underground Ductbank *(26 05 43)*

Note: Installation of single or multiple configuration underground utility raceways assembly to have minimum 3" concrete leveling base and encased in concrete envelope. Based on minimum 100' run, minimum 30" bury depth. Includes installation in trench using the appropriate supports, cleaning to remove any obstructions and installation of nylon pull string. Excludes trenching, concrete, backfilling, grading and seeding. Duct Banks are to be installed according to the appropriate sections of the accompanying specifications. Individual rows to be stacked for larger duct bank configurations.

26 05 43 00-0133 Rigid Galvanized Steel Conduit, Galvanized Rigid Conduit (GRC) Or Rigid Galvanized Steel (RGS), Duct Bank *(26 05 43 00-0132)*

Note: Includes appropriate spacers and fittings.

26 05 43 00-0134	LF	2 At 2", Rigid Galvanized Conduit Duct Bank	36.15	
26 05 43 00-0135	LF	4 At 2", Rigid Galvanized Conduit Duct Bank	72.34	
26 05 43 00-0136	LF	2 At 3", Rigid Galvanized Conduit Duct Bank	75.00	
26 05 43 00-0137	LF	4 At 3", Rigid Galvanized Conduit Duct Bank	150.45	
26 05 43 00-0138	LF	2 At 4", Rigid Galvanized Conduit Duct Bank	110.51	
26 05 43 00-0139	LF	4 At 4", Rigid Galvanized Conduit Duct Bank	222.07	
26 05 43 00-0140	LF	6 At 4", Rigid Galvanized Conduit Duct Bank	333.45	
26 05 43 00-0141	LF	2 At 5", Rigid Galvanized Conduit Duct Bank	210.42	
26 05 43 00-0142	LF	4 At 5", Rigid Galvanized Conduit Duct Bank	419.79	
26 05 43 00-0143	LF	6 At 5", Rigid Galvanized Conduit Duct Bank	644.64	
26 05 43 00-0144	LF	2 At 6", Rigid Galvanized Conduit Duct Bank	298.72	
26 05 43 00-0145	LF	4 At 6", Rigid Galvanized Conduit Duct Bank	599.69	
26 05 43 00-0146	LF	6 At 6", Rigid Galvanized Conduit Duct Bank	893.30	

26 05 43 00-0147 Polyvinyl Chloride (PVC), Type EB-20 Duct Bank System *(26 05 43 00-0132)*

Note: Includes appropriate spacers and fittings.

26 05 43 00-0148	LF	1 At 2", Duplex Polyvinyl Chloride (PVC), Type EB Duct Bank	7.48	
26 05 43 00-0149	LF	2 At 2", Duplex Polyvinyl Chloride (PVC), Type EB Duct Bank	16.39	
26 05 43 00-0150	LF	4 At 2", Duplex Polyvinyl Chloride (PVC), Type EB Duct Bank	31.49	
26 05 43 00-0151	LF	1 At 3", Duplex Polyvinyl Chloride (PVC), Type EB Duct Bank	9.92	
26 05 43 00-0152	LF	2 At 3", Duplex Polyvinyl Chloride (PVC), Type EB Duct Bank	19.78	
26 05 43 00-0153	LF	4 At 3", Duplex Polyvinyl Chloride (PVC), Type EB Duct Bank	40.18	
26 05 43 00-0154	LF	1 At 4", Duplex Polyvinyl Chloride (PVC), Type EB Duct Bank	13.32	
26 05 43 00-0155	LF	2 At 4", Duplex Polyvinyl Chloride (PVC), Type EB Duct Bank	26.66	
26 05 43 00-0156	LF	4 At 4", Duplex Polyvinyl Chloride (PVC), Type EB Duct Bank	53.36	
26 05 43 00-0157	LF	6 At 4", Duplex Polyvinyl Chloride (PVC), Type EB Duct Bank	80.03	
26 05 43 00-0158	LF	1 At 5", Duplex Polyvinyl Chloride (PVC), Type EB Duct Bank	16.94	
26 05 43 00-0159	LF	2 At 5", Duplex Polyvinyl Chloride (PVC), Type EB Duct Bank	33.85	
26 05 43 00-0160	LF	4 At 5", Duplex Polyvinyl Chloride (PVC), Type EB Duct Bank	65.62	
26 05 43 00-0161	LF	6 At 5", Duplex Polyvinyl Chloride (PVC), Type EB Duct Bank	93.26	
26 05 43 00-0162	LF	1 At 6", Duplex Polyvinyl Chloride (PVC), Type EB Duct Bank	29.83	
26 05 43 00-0163	LF	2 At 6", Duplex Polyvinyl Chloride (PVC), Type EB Duct Bank	45.96	
26 05 43 00-0164	LF	4 At 6", Duplex Polyvinyl Chloride (PVC), Type EB Duct Bank	92.12	
26 05 43 00-0165	LF	6 At 6", Duplex Polyvinyl Chloride (PVC), Type EB Duct Bank	148.50	

26 05 43 00-0166 Polyvinyl Chloride (PVC), Type DB-60 Duct Bank System *(26 05 43 00-0132)*

Note: Includes appropriate spacers and fittings.

26 05 43 00-0167	LF	1 At 2", Duplex Polyvinyl Chloride (PVC), Type DB Duct Bank	8.30	
26 05 43 00-0168	LF	2 At 2", Duplex Polyvinyl Chloride (PVC), Type DB Duct Bank	18.12	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 43 00-0169	LF	4 At 2", Duplex Polyvinyl Chloride (PVC), Type DB Duct Bank	34.73	
26 05 43 00-0170	LF	1 At 3", Duplex Polyvinyl Chloride (PVC), Type DB Duct Bank	10.31	
26 05 43 00-0171	LF	2 At 3", Duplex Polyvinyl Chloride (PVC), Type DB Duct Bank	20.60	
26 05 43 00-0172	LF	4 At 3", Duplex Polyvinyl Chloride (PVC), Type DB Duct Bank	41.07	
26 05 43 00-0173	LF	1 At 4", Duplex Polyvinyl Chloride (PVC), Type DB Duct Bank	13.68	
26 05 43 00-0174	LF	2 At 4", Duplex Polyvinyl Chloride (PVC), Type DB Duct Bank	27.38	
26 05 43 00-0175	LF	4 At 4", Duplex Polyvinyl Chloride (PVC), Type DB Duct Bank	54.80	
26 05 43 00-0176	LF	6 At 4", Duplex Polyvinyl Chloride (PVC), Type DB Duct Bank	82.19	
26 05 43 00-0177	LF	1 At 5", Duplex Polyvinyl Chloride (PVC), Type DB Duct Bank	17.48	
26 05 43 00-0178	LF	2 At 5", Duplex Polyvinyl Chloride (PVC), Type DB Duct Bank	34.94	
26 05 43 00-0179	LF	4 At 5", Duplex Polyvinyl Chloride (PVC), Type DB Duct Bank	67.78	
26 05 43 00-0180	LF	6 At 5", Duplex Polyvinyl Chloride (PVC), Type DB Duct Bank	96.51	
26 05 43 00-0181	LF	1 At 6", Duplex Polyvinyl Chloride (PVC), Type DB Duct Bank	30.58	
26 05 43 00-0182	LF	2 At 6", Duplex Polyvinyl Chloride (PVC), Type DB Duct Bank	47.52	
26 05 43 00-0183	LF	4 At 6", Duplex Polyvinyl Chloride (PVC), Type DB Duct Bank	95.24	
26 05 43 00-0184	LF	6 At 6", Duplex Polyvinyl Chloride (PVC), Type DB Duct Bank	153.17	

26 05 43 00-0185 Male Or Female Adapters *(26 05 43 00-0132)*

26 05 43 00-0186	EA	2" Adapter	39.57	
26 05 43 00-0187	EA	3" Adapter	58.02	
26 05 43 00-0188	EA	4" Adapter	75.33	
26 05 43 00-0189	EA	5" Adapter	118.27	
26 05 43 00-0190	EA	6" Adapter	145.61	

26 05 46 Utility Poles for Electrical Systems *(26 05)*

26 05 46 00-0001 Wood Poles *(26 05 46)*

26 05 46 00-0002 Wood Pole, Class 3, Penta-Treated To 8 Lb. Retention *(26 05 46 00-0001)*

Note: Machine dig and set.

26 05 46 00-0003	EA	25' Treated Wood Pole, Class 3, Machine Dig And Set	992.52	305.05
		For Class 1 Pole, Add	*133.81*	
		For Class 2 Pole, Add	*76.46*	
		For Class 4 Pole, Deduct	*-38.23*	
		For Class 5 Pole, Deduct	*-114.70*	
		For Class 6 Pole, Deduct	*-152.93*	
26 05 46 00-0004	EA	30' Treated Wood Pole, Class 3, Machine Dig And Set	1,196.03	338.46
		For Class 1 Pole, Add	*181.68*	
		For Class 2 Pole, Add	*103.82*	
		For Class 4 Pole, Deduct	*-51.91*	
		For Class 5 Pole, Deduct	*-155.72*	
		For Class 6 Pole, Deduct	*-207.63*	
26 05 46 00-0005	EA	35' Treated Wood Pole, Class 3, Machine Dig And Set	1,547.87	447.63
		For Class 1 Pole, Add	*228.46*	
		For Class 2 Pole, Add	*130.55*	
		For Class 4 Pole, Deduct	*-65.27*	
		For Class 5 Pole, Deduct	*-195.82*	
		For Class 6 Pole, Deduct	*-261.09*	
26 05 46 00-0006	EA	40' Treated Wood Pole, Class 3, Machine Dig And Set	1,777.26	492.34
		For Class 1 Pole, Add	*277.41*	
		For Class 2 Pole, Add	*158.52*	
		For Class 4 Pole, Deduct	*-79.26*	
		For Class 5 Pole, Deduct	*-237.78*	
		For Class 6 Pole, Deduct	*-317.04*	
26 05 46 00-0007	EA	45' Treated Wood Pole, Class 3, Machine Dig And Set	2,035.52	548.36
		For Class 1 Pole, Add	*328.54*	
		For Class 2 Pole, Add	*187.74*	
		For Class 4 Pole, Deduct	*-93.87*	
		For Class 5 Pole, Deduct	*-281.61*	
		For Class 6 Pole, Deduct	*-375.48*	
26 05 46 00-0008	EA	50' Treated Wood Pole, Class 3, Machine Dig And Set	2,318.70	615.42
		For Class 1 Pole, Add	*380.76*	
		For Class 2 Pole, Add	*217.58*	
		For Class 4 Pole, Deduct	*-108.79*	
		For Class 5 Pole, Deduct	*-326.37*	
		For Class 6 Pole, Deduct	*-435.16*	
26 05 46 00-0009	EA	55' Treated Wood Pole, Class 3, Machine Dig And Set	2,597.19	676.90
		For Class 1 Pole, Add	*435.16*	
		For Class 2 Pole, Add	*248.66*	
		For Class 4 Pole, Deduct	*-124.33*	
		For Class 5 Pole, Deduct	*-372.99*	
		For Class 6 Pole, Deduct	*-497.32*	
26 05 46 00-0010	EA	60' Treated Wood Pole, Class 3, Machine Dig And Set	2,906.18	744.36
		For Class 1 Pole, Add	*496.08*	
		For Class 2 Pole, Add	*283.47*	
		For Class 4 Pole, Deduct	*-141.74*	
		For Class 5 Pole, Deduct	*-425.21*	
		For Class 6 Pole, Deduct	*-566.95*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 46 00-0011	EA	65' Treated Wood Pole, Class 3, Machine Dig And Set	4,888.50	811.29
		For Class 1 Pole, Add	*1,143.05*	
		For Class 2 Pole, Add	*653.17*	
		For Class 4 Pole, Deduct	*-326.59*	
		For Class 5 Pole, Deduct	*-979.76*	
		For Class 6 Pole, Deduct	*-1,306.34*	
26 05 46 00-0012	EA	70' Treated Wood Pole, Class 3, Machine Dig And Set	5,377.19	863.02
		For Class 1 Pole, Add	*1,277.89*	
		For Class 2 Pole, Add	*730.22*	
		For Class 4 Pole, Deduct	*-365.11*	
		For Class 5 Pole, Deduct	*-1,095.33*	
		For Class 6 Pole, Deduct	*-1,460.44*	
26 05 46 00-0013	EA	75' Treated Wood Pole, Class 3, Machine Dig And Set	5,919.36	921.78
		For Class 1 Pole, Add	*1,426.52*	
		For Class 2 Pole, Add	*815.15*	
		For Class 4 Pole, Deduct	*-407.58*	
		For Class 5 Pole, Deduct	*-1,222.73*	
		For Class 6 Pole, Deduct	*-1,630.30*	
26 05 46 00-0014		**Removal And Relocation Of Wood Poles With Cross Arm** *(26 05 46 00-0001)*		
26 05 46 00-0015	LF	Removal And Relocation Of Up To 75' Wood Pole With Cross Arms	25.99	
26 05 46 00-0016		**Crossarms** *(26 05 46)*		
		Note: Includes hardware and braces.		
26 05 46 00-0017		**Wood Single Arm Crossarms** *(26 05 46 00-0016)*		
26 05 46 00-0018	EA	3-1/2" x 4-1/2" x 5'-7", Single Arm Wood Crossarm, With Hardware And Braces	227.42	90.98
26 05 46 00-0019	EA	3-1/2" x 4-1/2" x 8'-0", Single Arm Wood Crossarm, With Hardware And Braces	274.43	90.98
26 05 46 00-0020	EA	3-3/4" x 4-3/4" x 10'-0", Single Arm Wood Crossarm, With Hardware And Braces	287.85	116.97
26 05 46 00-0021		**Wood Double Arm Crossarms** *(26 05 46 00-0016)*		
26 05 46 00-0022	EA	3-1/2" x 4-1/2" x 5'-7", Double Arm Wood Crossarm, With Hardware And Braces	584.06	253.45
26 05 46 00-0023	EA	3-1/2" x 4-1/2" x 8'-0", Double Arm Wood Crossarm, With Hardware And Braces	622.36	253.45
26 05 46 00-0024	EA	3-3/4" x 4-3/4" x 10'-0", Double Arm Wood Crossarm, With Hardware And Braces	647.41	253.45
26 05 46 00-0025		**Fiberglass Crossarms** *(26 05 46 00-0016)*		
		Note: Includes hardware.		
26 05 46 00-0026		**Single Phase, 15 Degree Angle** *(26 05 46 00-0025)*		
26 05 46 00-0027	EA	Fiberglass Cutout And Arrestor Bracket, 18", Minimum Ultimate Load 800 Lb.	275.50	
26 05 46 00-0028	EA	Fiberglass Insulator Bracket, 14", 11/16" Diameter Hole, Minimum Ultimate Load 1,200 Lb.	344.48	54.59
26 05 46 00-0029	EA	Fiberglass Insulator Bracket, 14", 1" Lead Threaded, Minimum Ultimate Load 1,200 Lb.	357.48	58.49
26 05 46 00-0030		**Two Phase, 15 Degree Angle** *(26 05 46 00-0025)*		
26 05 46 00-0031	EA	Fiberglass Insulator Bracket, 36", Minimum Ultimate Load 1,200 Lb.	427.99	70.19
26 05 46 00-0032		**Fiberglass Crossarm Accessories** *(26 05 46 00-0025)*		
26 05 46 00-0033	EA	Fiberglass Deadend Crossarm, 36", Minimum Ultimate Load 7,000 Lb. Per Conductor	678.40	89.68
26 05 46 00-0034	EA	Fiberglass Deadend Crossarm, 36", Minimum Ultimate Load 12,000 Lb. Per Conductor	802.79	109.18
26 05 46 00-0035	EA	Pole Top Pin, Hot Dip Galvanized, 18", 1" Lead Threaded	117.98	15.60
26 05 46 00-0036	EA	Three Phase Equipment Mounting Bracket	589.92	77.98
26 05 46 00-0037	EA	Fiberglass Bull Horn Crossarm	457.92	129.97
26 05 46 00-0038		**Insulator Support System** *(26 05 46 00-0016)*		
26 05 46 00-0039		**Epoxy Construction Units, In Place Mounting** *(26 05 46 00-0038)*		
		Note: Includes hardware.		
26 05 46 00-0040	EA	1-1/2" Diameter x 19" Long Pole Side Pins Vertical (1 Arm Installed), In Place Mounting	137.42	
26 05 46 00-0041	EA	1-1/2" Diameter x 15" Long Pole Top Pins, In Place Mounting	113.83	
26 05 46 00-0042	EA	Deadend Arms, In Place Mounting	342.50	
26 05 46 00-0043	EA	1-1/2" Diameter x 18" Long Pole Side Pins Vertical (2 Arms Installed), In Place Mounting	222.32	
26 05 46 00-0044		**Epoxy Construction Units, Grounding Mounting** *(26 05 46 00-0038)*		
		Note: Includes hardware.		
26 05 46 00-0045	EA	1-1/2" Diameter x 18" Long Pole Side Pins Vertical, Grounding Mounting	99.81	
26 05 46 00-0046	EA	1-1/2" Diameter x 15" Long Pole Top Pins, Grounding Mounting	88.76	
26 05 46 00-0047	EA	Deadend Arms, Grounding Mounting	317.43	
26 05 46 00-0048		**Guying** *(26 05 46)*		
		Note: Includes cable, anchor and rod assembly, guy marker.		
26 05 46 00-0049		**Down Guy** *(26 05 46 00-0048)*		
26 05 46 00-0050	EA	Down Guy For 25' To 40' Pole	936.83	363.93
26 05 46 00-0051	EA	Down Guy For 45' To 60' Pole	956.46	363.93

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 46 00-0052	EA	Down Guy For 65' To 75' Pole	996.82	363.93
26 05 46 00-0053	EA	Guy Guard, Plastic	42.87	
26 05 46 00-0054		**Head Guy, 50' Spans** *(26 05 46 00-0048)*		
26 05 46 00-0055	EA	Head Guy (50' Span), For 25' To 40' Pole	1,332.17	558.89
26 05 46 00-0056	EA	Head Guy (50' Span), For 45' To 60' Pole	1,332.17	558.89
26 05 46 00-0057	EA	Head Guy (50' Span), For 65' To 75' Pole	1,332.17	558.89
26 05 46 00-0058		**Guy Strain Insulators Additional Insulators** *(26 05 46 00-0048)*		
		Note: As required at same material cost and labor.		
26 05 46 00-0059	EA	Guy Strain Insulator	553.92	272.95
26 05 46 00-0060		**Pole Anchor** *(26 05 46 00-0048)*		
		Note: Joslyn.		
26 05 46 00-0061	EA	Pole Anchor, 4" Helix, 3/4" x 54" Shaft	72.89	30.69
26 05 46 00-0062	EA	Pole Anchor, 6" Helix, 3/4" x 66" Shaft	82.81	30.69
26 05 46 00-0063	EA	Pole Anchor, 8" Helix, 1" x 66" Shaft	110.93	34.52
26 05 46 00-0064	EA	Pole Anchor, 10" Helix, 1-1/4" x 66" Shaft	156.64	38.37
26 05 46 00-0065	EA	Pole Anchor, 10" Helix, 1-1/4" x 8' Shaft	179.03	42.20
26 05 46 00-0066	EA	Pole Anchor, 16" Helix, 1-1/4" x 8' Shaft	288.01	57.54
26 05 46 00-0067		**Insulators** *(26 05 46)*		
26 05 46 00-0068		**Pin Insulator With Pin** *(26 05 46 00-0067)*		
26 05 46 00-0069	EA	5 KV Class 55-3, Pin Insulator With Pin	175.46	77.98
26 05 46 00-0070	EA	15 KV Class 55-5, Pin Insulator With Pin	181.10	77.98
26 05 46 00-0071		**Suspension Insulator** *(26 05 46 00-0067)*		
		Note: Includes clevis and strain clamp.		
26 05 46 00-0072	EA	5 KV Class 52-2, Suspension Insulator, With Clevis And Strain Clamp	223.69	103.98
26 05 46 00-0073	EA	15 KV Class 52-4, Suspension Insulator, With Clevis And Strain Clamp	239.02	103.98
26 05 46 00-0074	EA	25 KV Class 2 x 52-4, Suspension Insulator, With Clevis And Strain Clamp	337.06	129.97
26 05 46 00-0075	EA	50 KV Class 4 x 52-4, Suspension Insulator, With Clevis And Strain Clamp	536.35	207.96
26 05 46 00-0076		**Spool Insulator With Clevis** *(26 05 46 00-0067)*		
26 05 46 00-0077	EA	5 KV Class 53-5, Spool Insulator With Clevis	74.47	32.49
26 05 46 00-0078	EA	15 KV Class, Spool Insulator With Clevis	239.37	116.97
26 05 46 00-0079	EA	25 KV Class, Spool Insulator With Clevis	310.28	116.97
26 05 46 00-0080		**Secondary Rack** *(26 05 46 00-0067)*		
26 05 46 00-0081	EA	1 Spool Secondary Rack	147.86	64.98
26 05 46 00-0082	EA	2 Spool Secondary Rack	152.80	82.93
26 05 46 00-0083	EA	3 Spool Secondary Rack	228.73	110.47
26 05 46 00-0084	EA	4 Spool Secondary Rack	256.84	110.47
26 05 46 00-0085		**Outdoor Load Break Switches** *(26 05 46)*		
		Note: 3-Phase, group operated, 3-insulator, vertical break, high strength pin insulators worm gear operating mechanism operating rods, mechanisms, and switch bases are galvanized steel.		
26 05 46 00-0086		**7.2 KV Outdoor Load Break Switches** *(26 05 46 00-0085)*		
26 05 46 00-0087	EA	600 Amperes, 7.2 KV, Outdoor Load Break Switch, 3 Phase Vertical Break, 3 Insulator	5,810.81	441.91
26 05 46 00-0088	EA	1,200 Amperes, 7.2 KV, Outdoor Load Break Switch, 3 Phase Vertical Break, 3 Insulator	11,604.30	441.91
26 05 46 00-0089	EA	1,600 Amperes, 7.2 KV, Outdoor Load Break Switch, 3 Phase Vertical Break, 3 Insulator	17,304.46	747.35
26 05 46 00-0090	EA	2,000 Amperes, 7.2 KV, Outdoor Load Break Switch, 3 Phase Vertical Break, 3 Insulator	17,573.21	747.35
26 05 46 00-0091		**14.4 KV Outdoor Load Break Switches** *(26 05 46 00-0085)*		
26 05 46 00-0092	EA	600 Amperes, 14.4 KV, Outdoor Load Break Switch, 3 Phase Vertical Break, 3 Insulator	7,161.09	441.91
26 05 46 00-0093	EA	1,200 Amperes, 14.4 KV, Outdoor Load Break Switch, 3 Phase Vertical Break, 3 Insulator	13,771.32	441.91
26 05 46 00-0094	EA	1,600 Amperes, 14.4 KV, Outdoor Load Break Switch, 3 Phase Vertical Break, 3 Insulator	17,304.46	747.35
26 05 46 00-0095	EA	2,000 Amperes, 14.4 KV, Outdoor Load Break Switch, 3 Phase Vertical Break, 3 Insulator	17,573.21	747.35
26 05 46 00-0096		**23 KV Outdoor Load Break Switches** *(26 05 46 00-0085)*		
26 05 46 00-0097	EA	600 Amperes, 23 KV, Outdoor Load Break Switch, 3 Phase Vertical Break, 3 Insulator	7,878.96	513.40
26 05 46 00-0098	EA	1,200 Amperes, 23 KV, Outdoor Load Break Switch, 3 Phase Vertical Break, 3 Insulator	15,054.41	513.40
26 05 46 00-0099	EA	1,600 Amperes, 23 KV, Outdoor Load Break Switch, 3 Phase Vertical Break, 3 Insulator	18,011.94	883.82
26 05 46 00-0100	EA	2,000 Amperes, 23 KV, Outdoor Load Break Switch, 3 Phase Vertical Break, 3 Insulator	18,289.50	883.82
26 05 46 00-0101		**Square Distribution Poles** *(26 05 46)*		
26 05 46 00-0102		**Square Steel Tapered Shaft Distribution Poles** *(26 05 46 00-0101)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 46 00-0103	EA	20', Steel Taped Shaft Distribution Pole	3,871.81	552.39
26 05 46 00-0104	EA	25', Steel Taped Shaft Distribution Pole	4,327.86	584.88
26 05 46 00-0105	EA	30', Steel Taped Shaft Distribution Pole	4,689.38	649.87
26 05 46 00-0106	EA	35', Steel Taped Shaft Distribution Pole	5,191.13	714.85
26 05 46 00-0107	EA	40', Steel Taped Shaft Distribution Pole	7,119.72	779.84
26 05 46 00-0108		Square Prestressed Concrete Distribution Poles *(26 05 46 00-0101)*		
26 05 46 00-0109	EA	30', Prestressed Concrete Square Pole For Distribution	5,329.17	977.90
26 05 46 00-0110	EA	35', Prestressed Concrete Square Pole For Distribution	6,042.23	1,072.53
26 05 46 00-0111	EA	40', Prestressed Concrete Square Pole For Distribution	7,107.02	1,198.71
26 05 46 00-0112	EA	45', Prestressed Concrete Square Pole For Distribution	8,012.83	1,324.89
26 05 46 00-0113	EA	50', Prestressed Concrete Square Pole For Distribution	5,797.26	1,608.80
26 05 46 00-0114	EA	55', Prestressed Concrete Square Pole For Distribution	11,306.55	1,892.70
26 05 46 00-0115	EA	60', Prestressed Concrete Square Pole For Distribution	13,361.52	2,145.06
26 05 46 00-0116	EA	65', Prestressed Concrete Square Pole For Distribution	16,114.20	2,649.78
26 05 46 00-0117	EA	70', Prestressed Concrete Square Pole For Distribution	18,062.78	2,902.14
26 05 46 00-0118		Aluminum Tapered Poles *(26 05 46)*		
26 05 46 00-0119		Aluminum Tapered Round Seamless Shaft Poles *(26 05 46 00-0118)*		
26 05 46 00-0120	EA	20', Aluminum Tapered Round Seamless Shaft Pole For Distribution	3,744.53	487.41
26 05 46 00-0121	EA	25', Aluminum Tapered Round Seamless Shaft Pole For Distribution	5,283.10	519.90
26 05 46 00-0122	EA	30', Aluminum Tapered Round Seamless Shaft Pole For Distribution	6,081.54	584.88
26 05 46 00-0123	EA	35', Aluminum Tapered Round Seamless Shaft Pole For Distribution	7,234.87	649.87
26 05 46 00-0124	EA	40', Aluminum Tapered Round Seamless Shaft Pole For Distribution	11,076.79	714.85
26 05 46 00-0125		Steel Service Poles Distribution *(26 05 46)*		
		Note: Direct embedded, bearing plate on base end, pole cap on top end, grounding nut, galvanized finish.		
26 05 46 00-0126		Round Tapered Pole *(26 05 46 00-0125)*		
26 05 46 00-0127	EA	40', Galvanized Steel Tapered Round Pole For Distribution	5,171.42	779.84
26 05 46 00-0128	EA	45', Galvanized Steel Tapered Round Pole For Distribution	6,030.88	844.83
26 05 46 00-0129	EA	50', Galvanized Steel Tapered Round Pole For Distribution	6,422.35	909.82
26 05 46 00-0130	EA	55', Galvanized Steel Tapered Round Pole For Distribution	7,573.63	1,039.79
26 05 46 00-0131	EA	60', Galvanized Steel Tapered Round Pole For Distribution	9,405.65	1,169.77
26 05 46 00-0132	EA	65', Galvanized Steel Tapered Round Pole For Distribution	11,071.28	1,482.62
26 05 46 00-0133	EA	70', Galvanized Steel Tapered Round Pole For Distribution	12,312.27	1,681.98
26 05 46 00-0134	EA	75', Galvanized Steel Tapered Round Pole For Distribution	13,600.98	1,892.70
26 05 46 00-0135	EA	80', Galvanized Steel Tapered Round Pole For Distribution	15,246.25	2,145.06
26 05 46 00-0136	EA	85', Galvanized Steel Tapered Round Pole For Distribution	16,297.64	2,271.24
26 05 46 00-0137	EA	90', Galvanized Steel Tapered Round Pole For Distribution	17,660.71	2,523.59
26 05 46 00-0138	EA	95', Galvanized Steel Tapered Round Pole For Distribution	19,432.97	2,839.05
26 05 46 00-0139	EA	100', Galvanized Steel Tapered Round Pole For Distribution	21,405.50	3,217.59
26 05 46 00-0140		12 Sided Tapered *(26 05 46 00-0125)*		
26 05 46 00-0141	EA	40', Galvanized Steel Tapered 12 Sided Pole For Distribution	9,043.30	779.84
26 05 46 00-0142	EA	45', Galvanized Steel Tapered 12 Sided Pole For Distribution	9,986.64	844.83
26 05 46 00-0143	EA	50', Galvanized Steel Tapered 12 Sided Pole For Distribution	11,068.79	909.82
26 05 46 00-0144	EA	55', Galvanized Steel Tapered 12 Sided Pole For Distribution	12,146.73	1,039.79
26 05 46 00-0145	EA	60', Galvanized Steel Tapered 12 Sided Pole For Distribution	16,218.26	1,169.77
26 05 46 00-0146	EA	65', Galvanized Steel Tapered 12 Sided Pole For Distribution	17,925.79	1,482.62
26 05 46 00-0147	EA	70', Galvanized Steel Tapered 12 Sided Pole For Distribution	20,778.32	1,681.98
26 05 46 00-0148	EA	75', Galvanized Steel Tapered 12 Sided Pole For Distribution	22,333.87	1,892.70
26 05 46 00-0149	EA	80', Galvanized Steel Tapered 12 Sided Pole For Distribution	23,968.19	2,145.06
26 05 46 00-0150	EA	85', Galvanized Steel Tapered 12 Sided Pole For Distribution	25,391.65	2,271.24
26 05 46 00-0151	EA	90', Galvanized Steel Tapered 12 Sided Pole For Distribution	28,842.38	2,523.59
26 05 46 00-0152	EA	95', Galvanized Steel Tapered 12 Sided Pole For Distribution	30,583.31	2,839.05
26 05 46 00-0153	EA	100', Galvanized Steel Tapered 12 Sided Pole For Distribution	32,629.05	3,217.59
26 05 46 00-0154	EA	105', Galvanized Steel Tapered 12 Sided Pole For Distribution	34,825.17	3,596.13
26 05 46 00-0155		Standard Options For Round, 12 Sided and Octagonal Tapered Poles *(26 05 46 00-0125)*		
26 05 46 00-0156	EA	Ladder Clips	28.71	
26 05 46 00-0157	EA	Coal Tar Epoxy Coating From Base To 1' Above Ground Line	215.46	
26 05 46 00-0158	EA	Ground Sleeve-2' At Ground Line	216.71	
26 05 46 00-0159		Arms With Baseplates And Endplates *(26 05 46 00-0125)*		
26 05 46 00-0160	EA	4' Arm With Baseplate And Endplate	830.82	129.97
26 05 46 00-0161	EA	5' Arm With Baseplate And Endplate	908.23	129.97
26 05 46 00-0162	EA	6' Arm With Baseplate And Endplate	1,116.63	194.96
26 05 46 00-0163	EA	7' Arm With Baseplate And Endplate	1,184.33	194.96
26 05 46 00-0164	EA	8' Arm With Baseplate And Endplate	1,390.74	259.95
26 05 46 00-0165	EA	9' Arm With Baseplate And Endplate	1,468.10	259.95
26 05 46 00-0166	EA	10' Arm With Baseplate And Endplate	1,956.12	324.93
26 05 46 00-0167	EA	11' Arm With Baseplate And Endplate	2,042.97	324.93

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 46 00-0168		**Standard Vangs Load Bearing At Any Angle** *(26 05 46 00-0125)*		
26 05 46 00-0169	EA	15,000 Lb. Standard Vangs Load Bearing At Any Angle	323.79	129.97
26 05 46 00-0170	EA	30,000 Lb. Standard Vangs Load Bearing At Any Angle	371.21	129.97
26 05 46 00-0171	EA	45,000 Lb. Standard Vangs Load Bearing At Any Angle	436.06	129.97
26 05 46 00-0172		**Armless Construction Brackets** *(26 05 46 00-0125)*		
26 05 46 00-0173		**Verticals Insulator And Equipment Bracket** *(26 05 46 00-0172)*		
26 05 46 00-0174	EA	7" 1 Position Vertical Insulation And Equipment Bracket	331.52	129.97
26 05 46 00-0175	EA	12" 1 Position Vertical Insulation And Equipment Bracket	361.46	129.97
26 05 46 00-0176	EA	12" 3 Position Vertical Insulation And Equipment Bracket	410.11	129.97
26 05 46 00-0177	EA	18" 1 Position Vertical Insulation And Equipment Bracket	571.66	194.96
26 05 46 00-0178	EA	18" 3 Position Vertical Insulation And Equipment Bracket	600.07	194.96
26 05 46 00-0179		**Horizontal And Multiple Insulator Brackets** *(26 05 46 00-0172)*		
26 05 46 00-0180	EA	Sidepole 1 7/8" Clearance Horizontal And Multiple Insulation Brackets	308.20	129.97
26 05 46 00-0181	EA	Sidepole 2" Clearance Horizontal And Multiple Insulation Brackets	371.12	129.97
26 05 46 00-0182	EA	Sidepole 9" Clearance Horizontal And Multiple Insulation Brackets	541.19	194.96
26 05 46 00-0183	EA	Sidepole 10" Clearance Horizontal And Multiple Insulation Brackets	689.68	194.96
26 05 46 00-0184	EA	Sidepole 15" Clearance Horizontal And Multiple Insulation Brackets	881.78	259.95
26 05 46 00-0185	EA	Sidepole 20" Clearance Horizontal And Multiple Insulation Brackets	960.59	259.95
26 05 46 00-0186		**Pole Top Bracket And Pins** *(26 05 46 00-0172)*		
26 05 46 00-0187	EA	Pole Top Pin - 5"	317.34	129.97
26 05 46 00-0188	EA	Pole Top Bracket - 5"	332.61	129.97
26 05 46 00-0189		**Angle Pins** *(26 05 46 00-0172)*		
26 05 46 00-0190	EA	Angle Pin - 25 Degree, 6"	315.27	129.97
26 05 46 00-0191	EA	Angle Pin - 25 Degree, 7 1/4"	364.89	129.97
26 05 46 00-0192		**Static And Neutral Wire Brackets** *(26 05 46 00-0172)*		
26 05 46 00-0193	EA	Neutral Wire Extension Bracket	336.86	129.97
26 05 46 00-0194	EA	Static Wire Support Bracket	342.37	129.97
26 05 46 00-0195		**Cutout, Arrestor And Terminator Brackets** *(26 05 46 00-0172)*		
26 05 46 00-0196	EA	Cutout And Arrestor, With Mounting Bracket	302.69	129.97
26 05 46 00-0197	EA	Equipment Mounting T Bracket	330.67	129.97
26 05 46 00-0198	EA	15 KV Cutout	458.70	
26 05 46 00-0199	EA	9/10 KV Arrestor	419.35	129.97
26 05 46 00-0200		**Spacer Cable, Conduit Support And Cluster Bracket** *(26 05 46 00-0172)*		
26 05 46 00-0201	EA	Parallel Cable Spacer	376.44	129.97
26 05 46 00-0202	EA	Conduit Standoff Support Bracket	358.84	129.97
26 05 46 00-0203	EA	Three Transformer Pole Mounted Cluster Bracket	969.15	129.97
26 05 46 00-0204		**15 KV, 200 Amperes, Solenoid Operated High Voltage Switch** *(26 05 46 00-0172)* Note: Includes pole mounting bracket.		
26 05 46 00-0205	EA	15 KV, 1 Phase, Solenoid Switch With Pole Bracket	2,383.55	324.93
26 05 46 00-0206		**Octagonal Tapered** *(26 05 46 00-0125)*		
26 05 46 00-0207	EA	40', Galvanized Steel Tapered Octagonal Pole For Distribution	9,331.07	779.84
26 05 46 00-0208	EA	45', Galvanized Steel Tapered Octagonal Pole For Distribution	10,305.82	844.83
26 05 46 00-0209	EA	50', Galvanized Steel Tapered Octagonal Pole For Distribution	11,424.60	909.82
26 05 46 00-0210	EA	55', Galvanized Steel Tapered Octagonal Pole For Distribution	12,533.93	1,104.77
26 05 46 00-0211	EA	60', Galvanized Steel Tapered Octagonal Pole For Distribution	16,751.96	1,169.77
26 05 46 00-0212	EA	65', Galvanized Steel Tapered Octagonal Pole For Distribution	18,501.35	1,482.62
26 05 46 00-0213	EA	70', Galvanized Steel Tapered Octagonal Pole For Distribution	21,448.07	1,577.25
26 05 46 00-0214	EA	75', Galvanized Steel Tapered Octagonal Pole For Distribution	23,048.10	1,892.70
26 05 46 00-0215	EA	80', Galvanized Steel Tapered Octagonal Pole For Distribution	24,724.26	2,018.87
26 05 46 00-0216	EA	85', Galvanized Steel Tapered Octagonal Pole For Distribution	26,192.21	2,271.24
26 05 46 00-0217	EA	90', Galvanized Steel Tapered Octagonal Pole For Distribution	29,755.44	2,397.42
26 05 46 00-0218	EA	95', Galvanized Steel Tapered Octagonal Pole For Distribution	31,543.47	2,839.05
26 05 46 00-0219	EA	100', Galvanized Steel Tapered Octagonal Pole For Distribution	33,636.29	3,028.32
26 05 46 00-0220	EA	105', Galvanized Steel Tapered Octagonal Pole For Distribution	35,884.74	3,406.86
26 05 46 00-0221		**Removal And Relocation Of Steel Service Poles** *(26 05 46 00-0125)*		
26 05 46 00-0222	LF	Removal And Relocation Of Steel Service Poles With Arms Up To 60'	45.48	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 46 00-0223		Special Steel Bases For Poles *(26 05 46 00-0125)*		
26 05 46 00-0224	EA	Spin-In Steel Base For Poles	287.15	
26 05 46 00-0225	EA	Series 3, 25' Pole And less	320.31	64.98
26 05 46 00-0226	EA	Series 4, 40' Pole And less	382.11	74.73
26 05 46 00-0227	EA	Series 5, 50' Pole And less	437.40	81.23

26 05 53 Identification for Electrical Systems *(26 05)*

26 05 53 00-0001		Conduit Markers Pressure-Sensitive *(26 05 53)*		
		Note: Stick-on, includes arrow tape.		
26 05 53 00-0002	EA	1/2" Outside Diameter Pressure Sensitive Marker Stick-on	13.40	
26 05 53 00-0003	EA	3/4" Outside Diameter Pressure Sensitive Marker Stick-on	13.96	
26 05 53 00-0004	EA	1" Outside Diameter Pressure Sensitive Marker Stick-on	15.11	
26 05 53 00-0005	EA	1-1/4" Outside Diameter Pressure Sensitive Marker Stick-on	15.33	
26 05 53 00-0006	EA	1-1/2" Outside Diameter Pressure Sensitive Marker Stick-on	15.55	
26 05 53 00-0007	EA	2" Outside Diameter Pressure Sensitive Marker Stick-on	15.89	
26 05 53 00-0008	EA	2-1/2" Outside Diameter Pressure Sensitive Marker Stick-on	19.05	
26 05 53 00-0009	EA	3" Outside Diameter Pressure Sensitive Marker Stick-on	19.50	
26 05 53 00-0010	EA	3-1/2" Outside Diameter Pressure Sensitive Marker Stick-on	19.83	
26 05 53 00-0011	EA	4" Outside Diameter Pressure Sensitive Marker Stick-on	20.18	
26 05 53 00-0012	EA	4-1/2" Outside Diameter Pressure Sensitive Marker Stick-on	20.89	
26 05 53 00-0013	EA	5" Outside Diameter Pressure Sensitive Marker Stick-on	21.64	
26 05 53 00-0014	EA	6" Outside Diameter Pressure Sensitive Marker Stick-on	22.31	
26 05 53 00-0015	EA	7" Outside Diameter Pressure Sensitive Marker Stick-on	22.98	
26 05 53 00-0016	EA	8" Outside Diameter Pressure Sensitive Marker Stick-on	25.49	
26 05 53 00-0017	EA	10" Outside Diameter Pressure Sensitive Marker Stick-on	26.72	
26 05 53 00-0018		Labeling Existing Electrical Wires *(26 05 53)*		
		Note: Self-adhesive vinyl coated white cloth		
26 05 53 00-0019	EA	Labeling Existing Wire	3.52	
26 05 53 00-0020		Equipment Labeling *(26 05 53)*		
26 05 53 00-0021	EA	Label Both Ends Of One 4 Pair Cable	12.68	
26 05 53 00-0022	EA	Label single gang face plate (2 labels required)	11.93	
26 05 53 00-0023	EA	Label two gang face plate (4 labels required)	17.16	
26 05 53 00-0024	EA	Label both ends of a Siamese (dual 4 Pair cable)	12.68	

26 05 83 Wiring Connections *(26 05)*

26 05 83 00-0001		Tape Wrapped Compression Connectors *(26 05 83)*		
26 05 83 00-0002	EA	#6 AWG Compression Connection, Tape Wrapped Low Voltage, To 600 Volt	16.12	5.07
26 05 83 00-0003	EA	#4 AWG Compression Connection, Tape Wrapped Low Voltage, To 600 Volt	17.77	5.64
26 05 83 00-0004	EA	#2 AWG Compression Connection, Tape Wrapped Low Voltage, To 600 Volt	19.41	6.20
26 05 83 00-0005	EA	1/0 AWG Compression Connection, Tape Wrapped Low Voltage, To 600 Volt	22.66	6.77
26 05 83 00-0006	EA	2/0 AWG Compression Connection, Tape Wrapped Low Voltage, To 600 Volt	24.36	7.33
26 05 83 00-0007	EA	3/0 AWG Compression Connection, Tape Wrapped Low Voltage, To 600 Volt	27.12	7.90
26 05 83 00-0008	EA	4/0 AWG Compression Connection, Tape Wrapped Low Voltage, To 600 Volt	29.10	8.46
26 05 83 00-0009	EA	250 MCM Compression Connection, Tape Wrapped Low Voltage, To 600 Volt	31.76	9.02
26 05 83 00-0010	EA	300 MCM Compression Connection, Tape Wrapped Low Voltage, To 600 Volt	35.11	10.15
26 05 83 00-0011	EA	350 MCM Compression Connection, Tape Wrapped Low Voltage, To 600 Volt	36.78	10.72
26 05 83 00-0012	EA	400 MCM Compression Connection, Tape Wrapped Low Voltage, To 600 Volt	41.30	11.28
26 05 83 00-0013	EA	500 MCM Compression Connection, Tape Wrapped Low Voltage, To 600 Volt	45.19	11.85
26 05 83 00-0014	EA	750 MCM Compression Connection, Tape Wrapped Low Voltage, To 600 Volt	50.64	12.97
26 05 83 00-0015	EA	1,000 MCM Compression Connection, Tape Wrapped Low Voltage, To 600 Volt	58.97	14.66
26 05 83 00-0016		One Hole Compression Lugs *(26 05 83)*		
26 05 83 00-0017	EA	#22-18 AWG Low Voltage (To 600 Volt) One Hole Compression Lug	19.92	14.66
26 05 83 00-0018	EA	#16-14 AWG Low Voltage (To 600 Volt) One Hole Compression Lug	20.10	14.66
26 05 83 00-0019	EA	#12-10 AWG Low Voltage (To 600 Volt) One Hole Compression Lug	22.79	15.79
26 05 83 00-0020	EA	#8 AWG Low Voltage (To 600 Volt) One Hole Compression Lug	28.67	17.48
26 05 83 00-0021	EA	#6 AWG Low Voltage (To 600 Volt) One Hole Compression Lug	40.01	22.56
26 05 83 00-0022	EA	#4 AWG Low Voltage (To 600 Volt) One Hole Compression Lug	46.51	22.56
26 05 83 00-0023	EA	#2 AWG Low Voltage (To 600 Volt) One Hole Compression Lug	53.54	22.56
26 05 83 00-0024	EA	1/0 AWG Low Voltage (To 600 Volt) One Hole Compression Lug	65.64	33.84
26 05 83 00-0025	EA	2/0 AWG Low Voltage (To 600 Volt) One Hole Compression Lug	76.66	33.84
26 05 83 00-0026	EA	3/0 AWG Low Voltage (To 600 Volt) One Hole Compression Lug	89.62	33.84
26 05 83 00-0027	EA	4/0 AWG Low Voltage (To 600 Volt) One Hole Compression Lug	107.92	45.12
26 05 83 00-0028	EA	250 MCM Low Voltage (To 600 Volt) One Hole Compression Lug	127.93	67.68
26 05 83 00-0029	EA	300 MCM Low Voltage (To 600 Volt) One Hole Compression Lug	146.40	67.68
26 05 83 00-0030	EA	350 MCM Low Voltage (To 600 Volt) One Hole Compression Lug	157.23	67.68
26 05 83 00-0031	EA	400 MCM Low Voltage (To 600 Volt) One Hole Compression Lug	171.53	78.96
26 05 83 00-0032	EA	500 MCM Low Voltage (To 600 Volt) One Hole Compression Lug	187.66	78.96
26 05 83 00-0033	EA	750 MCM Low Voltage (To 600 Volt) One Hole Compression Lug	203.80	90.24

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 83 00-0034	EA	1,000 MCM Low Voltage (To 600 Volt) One Hole Compression Lug	241.15	101.52
26 05 83 00-0035		**Two Hole Compression Lugs** *(26 05 83)*		
26 05 83 00-0036	EA	#8 AWG Low Voltage (To 600 Volt) Two Hole Compression Lug	40.91	19.18
26 05 83 00-0037	EA	#6 AWG Low Voltage (To 600 Volt) Two Hole Compression Lug	44.07	20.42
26 05 83 00-0038	EA	#4 AWG Low Voltage (To 600 Volt) Two Hole Compression Lug	46.30	20.42
26 05 83 00-0039	EA	#2 AWG Low Voltage (To 600 Volt) Two Hole Compression Lug	53.29	23.47
26 05 83 00-0040	EA	1/0 AWG Low Voltage (To 600 Volt) Two Hole Compression Lug	65.38	29.33
26 05 83 00-0041	EA	2/0 AWG Low Voltage (To 600 Volt) Two Hole Compression Lug	76.39	34.85
26 05 83 00-0042	EA	3/0 AWG Low Voltage (To 600 Volt) Two Hole Compression Lug	89.32	40.84
26 05 83 00-0043	EA	4/0 AWG Low Voltage (To 600 Volt) Two Hole Compression Lug	107.58	49.52
26 05 83 00-0044	EA	250 MCM Low Voltage (To 600 Volt) Two Hole Compression Lug	127.54	58.77
26 05 83 00-0045	EA	300 MCM Low Voltage (To 600 Volt) Two Hole Compression Lug	145.94	67.12
26 05 83 00-0046	EA	350 MCM Low Voltage (To 600 Volt) Two Hole Compression Lug	156.75	72.30
26 05 83 00-0047	EA	400 MCM Low Voltage (To 600 Volt) Two Hole Compression Lug	170.96	78.29
26 05 83 00-0048	EA	500 MCM Low Voltage (To 600 Volt) Two Hole Compression Lug	187.03	85.50
26 05 83 00-0049	EA	750 MCM Low Voltage (To 600 Volt) Two Hole Compression Lug	204.81	92.72
26 05 83 00-0050	EA	1,000 MCM Low Voltage (To 600 Volt) Two Hole Compression Lug	254.85	112.80
26 05 83 00-0051		**Tape Wrapped Split Bolt Connectors** *(26 05 83)*		
26 05 83 00-0052	EA	#8 AWG Split Bolt Connectors, Tape Wrapped, Low Voltage, To 600 Volt	60.29	45.12
26 05 83 00-0053	EA	#6 AWG Split Bolt Connectors, Tape Wrapped, Low Voltage, To 600 Volt	66.29	48.51
26 05 83 00-0054	EA	#4 AWG Split Bolt Connectors, Tape Wrapped, Low Voltage, To 600 Volt	75.64	50.76
26 05 83 00-0055	EA	#2 AWG Split Bolt Connectors, Tape Wrapped, Low Voltage, To 600 Volt	88.23	56.40
26 05 83 00-0056	EA	1/0 AWG Split Bolt Connectors, Tape Wrapped, Low Voltage, To 600 Volt	104.58	62.04
26 05 83 00-0057	EA	2/0 AWG Split Bolt Connectors, Tape Wrapped, Low Voltage, To 600 Volt	118.59	67.68
26 05 83 00-0058	EA	3/0 AWG Split Bolt Connectors, Tape Wrapped, Low Voltage, To 600 Volt	148.71	73.32
26 05 83 00-0059	EA	4/0 AWG Split Bolt Connectors, Tape Wrapped, Low Voltage, To 600 Volt	159.62	78.96
26 05 83 00-0060	EA	250 MCM Split Bolt Connectors, Tape Wrapped, Low Voltage, To 600 Volt	168.41	84.60
26 05 83 00-0061	EA	300 MCM Split Bolt Connectors, Tape Wrapped, Low Voltage, To 600 Volt	194.08	93.06
26 05 83 00-0062	EA	350 MCM Split Bolt Connectors, Tape Wrapped, Low Voltage, To 600 Volt	219.77	135.36
26 05 83 00-0063	EA	400 MCM Split Bolt Connectors, Tape Wrapped, Low Voltage, To 600 Volt	241.41	112.80
26 05 83 00-0064	EA	500 MCM Split Bolt Connectors, Tape Wrapped, Low Voltage, To 600 Volt	263.05	152.28
26 05 83 00-0065	EA	750 MCM Split Bolt Connectors, Tape Wrapped, Low Voltage, To 600 Volt	295.37	157.93
26 05 83 00-0066	EA	1,000 MCM Split Bolt Connectors, Tape Wrapped, Low Voltage, To 600 Volt	338.14	169.20
26 05 83 00-0067		**Cable Termination Lugs Handwrapped, No Stress Cone** *(26 05 83)*		
26 05 83 00-0068	EA	#8 Or #6 AWG Cable Termination Lugs, Wrapped, No Stress Cones, Low Volt, To 600 Volt	104.51	45.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*23.69*	
26 05 83 00-0069	EA	#4 AWG Cable Termination Lugs, Wrapped, No Stress Cones, Low Volt, To 600 Volt	115.71	45.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*26.86*	
26 05 83 00-0070	EA	1/0 AWG Cable Termination Lugs, Wrapped, No Stress Cones, Low Volt, To 600 Volt	159.74	67.68
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*37.60*	
26 05 83 00-0071	EA	4/0 AWG Cable Termination Lugs, Wrapped, No Stress Cones, Low Volt, To 600 Volt	180.56	67.68
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*43.38*	
26 05 83 00-0072	EA	300 MCM Cable Termination Lugs, Wrapped, No Stress Cones, Low Volt, To 600 Volt	216.77	84.60
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*51.27*	
26 05 83 00-0073	EA	500 MCM Cable Termination Lugs, Wrapped, No Stress Cones, Low Volt, To 600 Volt	304.23	112.80
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*70.50*	
26 05 83 00-0074		**Terminal Blocks** *(26 05 83)*		
		Note: Labor excludes wire termination.		
26 05 83 00-0075	EA	Power Distribution Block, 250 MCM 3 Phase Terminal Block, No Labor Wire Termination, 600 Volt	1,044.40	417.36
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*250.67*	
26 05 83 00-0076	EA	#22 To #10 Wire Size, 12 Point, 600 Volt Terminal Block	302.26	56.50
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*34.23*	
26 05 83 00-0077	EA	#8 To #2 Wire Size, 12 Point, 600 Volt Terminal Block	337.13	56.50
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*34.59*	
26 05 83 00-0078		**Parallel Gutter Tap Or Motor Connection** *(26 05 83)*		
26 05 83 00-0079	EA	#8 AWG Parallel Gutter Tap, Versitap, Insulation With Duct Seal And Tap	40.90	20.42
26 05 83 00-0080	EA	#6 AWG Parallel Gutter Tap, Versitap, Insulation With Duct Seal And Tap	44.07	20.42
26 05 83 00-0081	EA	#4 AWG Parallel Gutter Tap, Versitap, Insulation With Duct Seal And Tap	46.30	20.42
26 05 83 00-0082	EA	#2 AWG Parallel Gutter Tap, Versitap, Insulation With Duct Seal And Tap	53.29	23.47
26 05 83 00-0083	EA	1/0 AWG Parallel Gutter Tap, Versitap, Insulation With Duct Seal And Tap	65.38	29.33
26 05 83 00-0084	EA	2/0 AWG Parallel Gutter Tap, Versitap, Insulation With Duct Seal And Tap	76.39	34.85
26 05 83 00-0085	EA	3/0 AWG Parallel Gutter Tap, Versitap, Insulation With Duct Seal And Tap	89.32	40.84
26 05 83 00-0086	EA	4/0 AWG Parallel Gutter Tap, Versitap, Insulation With Duct Seal And Tap	107.58	49.52
26 05 83 00-0087	EA	250 MCM Parallel Gutter Tap, Versitap, Insulation With Duct Seal And Tap	127.53	58.77
26 05 83 00-0088	EA	300 MCM Parallel Gutter Tap, Versitap, Insulation With Duct Seal And Tap	145.94	67.12
26 05 83 00-0089	EA	350 MCM Parallel Gutter Tap, Versitap, Insulation With Duct Seal And Tap	156.76	72.30
26 05 83 00-0090	EA	400 MCM Parallel Gutter Tap, Versitap, Insulation With Duct Seal And Tap	170.96	78.29
26 05 83 00-0091	EA	500 MCM Parallel Gutter Tap, Versitap, Insulation With Duct Seal And Tap	187.03	85.50
26 05 83 00-0092	EA	750 MCM Parallel Gutter Tap, Versitap, Insulation With Duct Seal And Tap	187.60	85.50
26 05 83 00-0093	EA	#8 AWG Parallel Gutter Tap, Versitap, Insulating Cover	40.90	20.42
26 05 83 00-0094	EA	#6 AWG Parallel Gutter Tap, Versitap, Insulating Cover	44.07	20.42

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 83 00-0095	EA	#4 AWG Parallel Gutter Tap, Versitap, Insulating Cover	46.30	20.42
26 05 83 00-0096	EA	#2 AWG Parallel Gutter Tap, Versitap, Insulating Cover	53.29	23.47
26 05 83 00-0097	EA	1/0 AWG Parallel Gutter Tap, Versitap, Insulating Cover	65.38	29.33
26 05 83 00-0098	EA	2/0 AWG Parallel Gutter Tap, Versitap, Insulating Cover	76.39	34.85
26 05 83 00-0099	EA	3/0 AWG Parallel Gutter Tap, Versitap, Insulating Cover	89.32	40.84
26 05 83 00-0100	EA	4/0 AWG Parallel Gutter Tap, Versitap, Insulating Cover	107.58	49.52
26 05 83 00-0101	EA	250 MCM Parallel Gutter Tap, Versitap, Insulating Cover	127.53	58.77
26 05 83 00-0102	EA	300 MCM Parallel Gutter Tap, Versitap, Insulating Cover	145.94	67.12
26 05 83 00-0103	EA	350 MCM Parallel Gutter Tap, Versitap, Insulating Cover	156.76	72.30
26 05 83 00-0104	EA	400 MCM Parallel Gutter Tap, Versitap, Insulating Cover	170.96	78.29
26 05 83 00-0105	EA	500 MCM Parallel Gutter Tap, Versitap, Insulating Cover	187.03	85.50
26 05 83 00-0106	EA	750 MCM Parallel Gutter Tap, Versitap, Insulating Cover	187.60	85.50

26 05 83 00-0107 Copper Mechanical Lugs *(26 05 83)*

26 05 83 00-0108	EA	#8 Copper Mechanical Lugs	33.26	14.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.46*	
26 05 83 00-0109	EA	#6 Copper Mechanical Lugs	39.85	17.03
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.22*	
26 05 83 00-0110	EA	#4 Copper Mechanical Lugs	46.00	19.74
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.84*	
26 05 83 00-0111	EA	#2 Copper Mechanical Lugs	60.62	25.15
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.11*	
26 05 83 00-0112	EA	1/0 Copper Mechanical Lugs	81.67	33.84
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.30*	
26 05 83 00-0113	EA	2/0 Copper Mechanical Lugs	98.04	39.25
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*23.59*	
26 05 83 00-0114	EA	3/0 Copper Mechanical Lugs	115.18	45.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 05 83 00-0115	EA	4/0 Copper Mechanical Lugs	131.59	50.65
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*30.36*	
26 05 83 00-0116	EA	250 MCM Copper Mechanical Lugs	151.68	56.40
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*33.84*	
26 05 83 00-0117	EA	300 MCM Copper Mechanical Lugs	171.50	62.04
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*37.24*	
26 05 83 00-0118	EA	350 MCM Copper Mechanical Lugs	191.24	67.68
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*40.61*	
26 05 83 00-0119	EA	400 MCM Copper Mechanical Lugs	210.85	73.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*43.96*	
26 05 83 00-0120	EA	500 MCM Copper Mechanical Lugs	230.77	78.96
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*47.38*	
26 05 83 00-0121	EA	750 MCM Copper Mechanical Lugs	261.23	89.90
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*53.97*	
26 05 83 00-0122	EA	1,000 MCM Copper Mechanical Lugs	295.96	101.52
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*60.91*	

26 05 83 00-0123 Gel Connectors *(26 05 83)*

26 05 83 00-0124	EA	3 Port, #14 to 2/0, Push On Gel Stub Splice Kit Note: Kit contains connector, gel filled cap and cap clamp.	69.70	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.39*	
26 05 83 00-0125	EA	4 Port, #14 to 2, Gel Tap Splice Kit	66.82	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.07*	

26 05 83 00-0126 Other Connections *(26 05 83)*

26 05 83 00-0127	EA	#14 AWG Motor Connection, Spade Lug, Machine Bolt/Nut, Insulated With Tape	11.49	5.15
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.09*	
26 05 83 00-0128	EA	#12 AWG Motor Connection, Spade Lug, Machine Bolt/Nut, Insulated With Tape	11.61	5.15
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.09*	
26 05 83 00-0129	EA	#10 AWG Motor Connection, Spade Lug, Machine Bolt/Nut, Insulated With Tape	11.73	5.15
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.09*	

26 05 83 00-0130 Motor/Equipment Connections And Terminations *(26 05 83)*

Note: Includes rotation testing. If equipment rating is other than horsepower (KW, CFM, tons, Btu/Hr, etc.) convert units to horsepower and select proper circuit characteristics. Includes material conduit (6 LF max.), connectors and conductors. To connect electrical wiring to all new or existing equipment motors.

26 05 83 00-0131 AC Single Phase, 230 Volt *(26 05 83 00-0130)*

26 05 83 00-0132	EA	<1/2 HP AC Motor Single Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	75.20	28.20
26 05 83 00-0133	EA	1/2 HP AC Motor Single Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	74.57	28.20
26 05 83 00-0134	EA	3/4 HP AC Motor Single Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	86.61	33.84
26 05 83 00-0135	EA	1 HP AC Motor Single Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	104.92	42.30
26 05 83 00-0136	EA	1-1/2 HP AC Motor Single Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	106.18	42.30
26 05 83 00-0137	EA	2 HP AC Motor Single Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	106.43	42.30
26 05 83 00-0138	EA	3 HP AC Motor Single Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	110.59	42.30
26 05 83 00-0139	EA	5 HP AC Motor Single Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	139.30	56.40
26 05 83 00-0140	EA	7-1/2 HP AC Motor Single Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	143.97	56.40
26 05 83 00-0141	EA	10 HP AC Motor Single Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	182.65	70.50

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 05 83 00-0142		**AC Three Phase, 230 Volt** *(26 05 83 00-0130)*		
26 05 83 00-0143	EA	1/2 HP AC Motor Three Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	74.57	28.20
26 05 83 00-0144	EA	3/4 HP AC Motor Three Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	86.61	33.84
26 05 83 00-0145	EA	1 HP AC Motor Three Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	104.92	42.30
26 05 83 00-0146	EA	1-1/2 HP AC Motor Three Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	106.18	42.30
26 05 83 00-0147	EA	2 HP AC Motor Three Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	106.43	42.30
26 05 83 00-0148	EA	3 HP AC Motor Three Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	110.59	42.30
26 05 83 00-0149	EA	5 HP AC Motor Three Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	139.30	56.40
26 05 83 00-0150	EA	7-1/2 HP AC Motor Three Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	143.97	56.40
26 05 83 00-0151	EA	10 HP AC Motor Three Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	182.65	70.50
26 05 83 00-0152	EA	15 HP AC Motor Three Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	188.96	70.50
26 05 83 00-0153	EA	20 HP AC Motor Three Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	242.00	84.60
26 05 83 00-0154	EA	25 HP AC Motor Three Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	251.61	84.60
26 05 83 00-0155	EA	30 HP AC Motor Three Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	345.48	112.80
26 05 83 00-0156	EA	40 HP AC Motor Three Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	433.43	141.01
26 05 83 00-0157	EA	50 HP AC Motor Three Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	508.26	169.20
26 05 83 00-0158	EA	60 HP AC Motor Three Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	608.30	197.40
26 05 83 00-0159	EA	75 HP AC Motor Three Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	700.30	225.60
26 05 83 00-0160	EA	100 HP AC Motor Three Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	867.48	282.00
26 05 83 00-0161	EA	125 HP AC Motor Three Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	1,022.43	335.58
26 05 83 00-0162	EA	150 HP AC Motor Three Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	1,215.85	391.42
26 05 83 00-0163	EA	200 HP AC Motor Three Phase, 230 Volt Motor/Equipment, Connection, Termination And Rotation Testing	1,708.43	587.02
26 05 83 00-0164		**AC Three Phase, 460 Volt** *(26 05 83 00-0130)*		
26 05 83 00-0165	EA	1/2 HP AC Motor Three Phase, 460 Volt Motor/Equipment, Connection, Termination And Rotation Testing	74.57	28.20
26 05 83 00-0166	EA	3/4 HP AC Motor Three Phase, 460 Volt Motor/Equipment, Connection, Termination And Rotation Testing	86.61	33.84
26 05 83 00-0167	EA	1 HP AC Motor Three Phase, 460 Volt Motor/Equipment, Connection, Termination And Rotation Testing	104.92	42.30
26 05 83 00-0168	EA	1-1/2 HP AC Motor Three Phase, 460 Volt Motor/Equipment, Connection, Termination And Rotation Testing	106.18	42.30
26 05 83 00-0169	EA	2 HP AC Motor Three Phase, 460 Volt Motor/Equipment, Connection, Termination And Rotation Testing	106.43	42.30
26 05 83 00-0170	EA	3 HP AC Motor Three Phase, 460 Volt Motor/Equipment, Connection, Termination And Rotation Testing	110.59	42.30
26 05 83 00-0171	EA	5 HP AC Motor Three Phase, 460 Volt Motor/Equipment, Connection, Termination And Rotation Testing	139.30	56.40
26 05 83 00-0172	EA	7-1/2 HP AC Motor Three Phase, 460 Volt Motor/Equipment, Connection, Termination And Rotation Testing	143.97	56.40
26 05 83 00-0173	EA	10 HP AC Motor Three Phase, 460 Volt Motor/Equipment, Connection, Termination And Rotation Testing	182.65	70.50
26 05 83 00-0174	EA	15 HP AC Motor Three Phase, 460 Volt Motor/Equipment, Connection, Termination And Rotation Testing	188.96	70.50
26 05 83 00-0175	EA	20 HP AC Motor Three Phase, 460 Volt Motor/Equipment, Connection, Termination And Rotation Testing	242.02	84.60
26 05 83 00-0176	EA	25 HP AC Motor Three Phase, 460 Volt Motor/Equipment, Connection, Termination And Rotation Testing	251.59	84.60
26 05 83 00-0177	EA	30 HP AC Motor Three Phase, 460 Volt Motor/Equipment, Connection, Termination And Rotation Testing	345.48	112.80
26 05 83 00-0178	EA	40 HP AC Motor Three Phase, 460 Volt Motor/Equipment, Connection, Termination And Rotation Testing	433.77	141.23
26 05 83 00-0179	EA	50 HP AC Motor Three Phase, 460 Volt Motor/Equipment, Connection, Termination And Rotation Testing	508.26	169.20
26 05 83 00-0180	EA	60 HP AC Motor Three Phase, 460 Volt Motor/Equipment, Connection, Termination And Rotation Testing	608.30	197.40
26 05 83 00-0181	EA	75 HP AC Motor Three Phase, 460 Volt Motor/Equipment, Connection, Termination And Rotation Testing	700.30	225.60
26 05 83 00-0182	EA	100 HP AC Motor Three Phase, 460 Volt Motor/Equipment, Connection, Termination And Rotation Testing	867.48	282.00
26 05 83 00-0183	EA	125 HP AC Motor Three Phase, 460 Volt Motor/Equipment, Connection, Termination And Rotation Testing	1,022.74	335.70
26 05 83 00-0184	EA	150 HP AC Motor Three Phase, 460 Volt Motor/Equipment, Connection, Termination And Rotation Testing	1,216.28	391.64
26 05 83 00-0185	EA	200 HP AC Motor Three Phase, 460 Volt Motor/Equipment, Connection, Termination And Rotation Testing	1,709.42	587.47
26 05 83 00-0186		**AC Single Phase, 120 Volt** *(26 05 83 00-0130)*		
26 05 83 00-0187	EA	1/2 HP AC And Less Single Phase, 120 Volt Motor/Equipment, Connection, Termination And Rotation Testing	75.20	28.20
26 05 83 00-0188		**Motor Moisture Sensor** *(26 05 83 00-0130)*		
26 05 83 00-0189	EA	Motor Moisture Sensor Located In Winding	865.18	

26 08 Commissioning of Electrical Systems *(26)*

See CSI section 01 91 13 00-0001 for commissioning.

26 09 Instrumentation and Control for Electrical Systems *(26)*

Note: Includes testing of new devices and certification.

26 09 13 Electrical Power Monitoring *(26 09)*

26 09 13 00-0001		**Vending Machine Energy Usage Controls** *(26 09 13)*		
26 09 13 00-0002	EA	Wallmount VendingMiser® With PIR Occupany Sensor (Energy Miser VM150)	444.49	11.30
26 09 13 00-0003	EA	Wallmount VendingMiser® With 14' Data Cable (Energy Miser VM151)	398.40	5.65
26 09 13 00-0004	EA	Weatherproof Wallmount VendingMiser® With PIR Occupany Sensor (Energy Miser VM151)	466.78	11.30
26 09 13 00-0005	EA	Weatherproof Wallmount VendingMiser® With 14' Data Cable (Energy Miser VM161)	420.69	5.65
26 09 13 00-0006	EA	Velcro Mounted Easy-Install VendingMiser® With PIR Occupany Sensor (Energy Miser VM170)	433.19	9.04
26 09 13 00-0007	EA	Velcro Mounted Easy-Install VendingMiser® With 14' Data Cable (Energy Miser VM171)	392.75	4.52
26 09 13 00-0008	EA	Weatherproof Velcro Mounted Easy-Install VendingMiser® With PIR Occupany Sensor (Energy Miser VM180)	455.48	9.04
26 09 13 00-0009	EA	Weatherproof Velcro Mounted Easy-Install VendingMiser® With 14' Data Cable (Energy Miser VM181)	415.04	4.52
26 09 13 00-0010	EA	Wallmount CoolerMiser With PIR Occupany Sensor (Energy Miser CM150)	402.12	11.30
26 09 13 00-0011	EA	Wallmount CoolerMiser With 14' Data Cable (Energy Miser CM151)	356.03	5.65
26 09 13 00-0012	EA	Velcro Mounted Easy-Install CoolerMiser With PIR Occupany Sensor (Energy Miser CM170)	390.82	9.04
26 09 13 00-0013	EA	Velcro Mounted Easy-Install CoolerMiser With 14' Data Cable (Energy Miser CM171)	350.38	4.52
26 09 13 00-0014	EA	Wallmount SnackMiser With PIR Occupany Sensor (Energy Miser SM150)	402.12	11.30
26 09 13 00-0015	EA	Wallmount SnackMiser With 14' Data Cable (Energy Miser SM151)	356.03	5.65

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 09 13 00-0016	EA	Velcro Mounted Easy-Install SnackMiser With PIR Occupany Sensor (Energy Miser SM170)	390.82	9.04
26 09 13 00-0017	EA	Velcro Mounted Easy-Install SnackMiser With 14' Data Cable (Energy Miser SM171)	350.38	4.52
26 09 13 00-0018	EA	1200 Watt, Multi Plug Load, Wallmount PlugMiser With PIR Occupany Sensor (Energy Miser PM150)	402.12	11.30
26 09 13 00-0019	EA	1200 Watt, Multi Plug Load, Wallmount PlugMiser With 14' Data Cable (Energy Miser PM151)	356.03	5.65
26 09 13 00-0020	EA	1200 Watt, Multi Plug Load, Table Leg Mount PlugMiser With PIR Occupany Sensor (Energy Miser PM190)	402.12	11.30
26 09 13 00-0021	EA	Wattsup Line Logger (Energy Miser 60500)	296.58	16.95
26 09 13 00-0022	EA	Wattsup Pro Line Logger (Energy Miser 60501)	374.62	16.95
26 09 13 00-0023	EA	Test Drive Kit And Wallmount VendingMiser® With PIR Occupany Sensor (Energy Miser TD150)	723.97	22.60
26 09 13 00-0024	EA	Test Drive Kit And Velcro Mounted Easy-Install VendingMiser® With PIR Occupany Sensor (Energy Miser TD170)	712.67	20.34
26 09 13 00-0025		Work Station Energy Usage Controls *(26 09 13)*		
26 09 13 00-0026	EA	Power Strip With Personal Sensor (Wattstopper IDP-3050-A)	192.99	11.30

26 09 23 Lighting Control Devices *(26 09)*

26 09 23 00-0001 Lighting Contactors *(26 09 23)*
Note: Up to 600 volt.

26 09 23 00-0002 Electrically Held, Lighting Contactors *(26 09 23 00-0001)*

26 09 23 00-0003 NEMA 1 Enclosure, Electrically Held, Lighting Contactors *(26 09 23 00-0002)*

26 09 23 00-0004 2-Pole, NEMA 1 Enclosure, Electrically Held, Lighting Contactors *(26 09 23 00-0003)*

26 09 23 00-0005	EA	20 Amperes, 2 Pole, NEMA 1 Enclosure, Electrically Held, Lighting Contactor	566.36	90.24
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*54.14*	
26 09 23 00-0006	EA	30 Amperes, 2 Pole, NEMA 1 Enclosure, Electrically Held, Lighting Contactor	707.68	101.52
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*60.91*	
26 09 23 00-0007	EA	60 Amperes, 2 Pole, NEMA 1 Enclosure, Electrically Held, Lighting Contactor	1,349.50	157.93
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*94.75*	
26 09 23 00-0008	EA	100 Amperes, 2 Pole, NEMA 1 Enclosure, Electrically Held, Lighting Contactor	2,125.96	214.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*128.59*	
26 09 23 00-0009	EA	200 Amperes, 2 Pole, NEMA 1 Enclosure, Electrically Held, Lighting Contactor	4,555.52	282.00
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*169.20*	

26 09 23 00-0010 3-Pole, NEMA 1 Enclosure, Electrically Held, Lighting Contactors *(26 09 23 00-0003)*

26 09 23 00-0011	EA	20 Amperes, 3 Pole, NEMA 1 Enclosure, Electrically Held, Lighting Contactor	639.90	101.52
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*60.91*	
26 09 23 00-0012	EA	30 Amperes, 3 Pole, NEMA 1 Enclosure, Electrically Held, Lighting Contactor	774.77	112.80
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*67.68*	
26 09 23 00-0013	EA	60 Amperes, 3 Pole, NEMA 1 Enclosure, Electrically Held, Lighting Contactor	1,453.99	180.48
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*108.29*	
26 09 23 00-0014	EA	100 Amperes, 3 Pole, NEMA 1 Enclosure, Electrically Held, Lighting Contactor	2,291.95	236.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*142.13*	
26 09 23 00-0015	EA	200 Amperes, 3 Pole, NEMA 1 Enclosure, Electrically Held, Lighting Contactor	4,884.39	310.20
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*186.12*	

26 09 23 00-0016 4-Pole, NEMA 1 Enclosure, Electrically Held, Lighting Contactors *(26 09 23 00-0003)*

26 09 23 00-0017	EA	20 Amperes, 4 Pole, NEMA 1 Enclosure, Electrically Held, Lighting Contactor	758.64	112.80
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*67.68*	
26 09 23 00-0018	EA	30 Amperes, 4 Pole, NEMA 1 Enclosure, Electrically Held, Lighting Contactor	919.24	124.09
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*74.45*	
26 09 23 00-0019	EA	60 Amperes, 4 Pole, NEMA 1 Enclosure, Electrically Held, Lighting Contactor	1,770.52	203.04
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*121.83*	
26 09 23 00-0020	EA	100 Amperes, 4 Pole, NEMA 1 Enclosure, Electrically Held, Lighting Contactor	2,760.07	259.44
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*155.66*	
26 09 23 00-0021	EA	200 Amperes, 4 Pole, NEMA 1 Enclosure, Electrically Held, Lighting Contactor	6,279.77	338.40
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*203.04*	

26 09 23 00-0022 NEMA 3R Enclosure, Electrically Held, Lighting Contactors *(26 09 23 00-0002)*

26 09 23 00-0023 2-Pole, NEMA 3R Enclosure, Electrically Held, Lighting Contactors *(26 09 23 00-0022)*

26 09 23 00-0024	EA	30 Amperes, 2 Pole, NEMA 3R Enclosure, Electrically Held, Lighting Contactor	1,182.14	101.52
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*60.91*	
26 09 23 00-0025	EA	60 Amperes, 2 Pole, NEMA 3R Enclosure, Electrically Held, Lighting Contactor	2,461.85	157.93
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*94.75*	
26 09 23 00-0026	EA	100 Amperes, 2 Pole, NEMA 3R Enclosure, Electrically Held, Lighting Contactor	3,741.55	214.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*128.59*	

26 09 23 00-0027 3-Pole, NEMA 3R Enclosure, Electrically Held, Lighting Contactors *(26 09 23 00-0022)*

26 09 23 00-0028	EA	30 Amperes, 3 Pole, NEMA 3R Enclosure, Electrically Held, Lighting Contactor	1,739.62	112.80
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*67.68*	
26 09 23 00-0029	EA	60 Amperes, 3 Pole, NEMA 3R Enclosure, Electrically Held, Lighting Contactor	2,690.22	180.48
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*108.29*	
26 09 23 00-0030	EA	100 Amperes, 3 Pole, NEMA 3R Enclosure, Electrically Held, Lighting Contactor	4,122.46	236.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*142.13*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 09 23 00-0031	EA	200 Amperes, 3 Pole, NEMA 3R Enclosure, Electrically Held, Lighting Contactor	9,873.81	310.20
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*186.12*	
26 09 23 00-0032		**4-Pole, NEMA 3R Enclosure, Electrically Held, Lighting Contactors** *(26 09 23 00-0022)*		
26 09 23 00-0033	EA	30 Amperes, 4 Pole, NEMA 3R Enclosure, Electrically Held, Lighting Contactor	1,618.32	124.09
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*74.45*	
26 09 23 00-0034	EA	60 Amperes, 4 Pole, NEMA 3R Enclosure, Electrically Held, Lighting Contactor	2,671.06	203.04
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*121.83*	
26 09 23 00-0035	EA	100 Amperes, 4 Pole, NEMA 3R Enclosure, Electrically Held, Lighting Contactor	3,678.66	259.44
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*155.66*	
26 09 23 00-0036		**NEMA 4 Enclosure, Electrically Held, Lighting Contactors** *(26 09 23 00-0002)*		
26 09 23 00-0037		**2-Pole, NEMA 4 Enclosure, Electrically Held, Lighting Contactors** *(26 09 23 00-0036)*		
26 09 23 00-0038	EA	20 Amperes, 2 Pole, NEMA 4 Enclosure, Electrically Held, Lighting Contactor	976.57	90.24
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*54.14*	
26 09 23 00-0039	EA	30 Amperes, 2 Pole, NEMA 4 Enclosure, Electrically Held, Lighting Contactor	1,251.54	101.52
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*60.91*	
26 09 23 00-0040	EA	60 Amperes, 2 Pole, NEMA 4 Enclosure, Electrically Held, Lighting Contactor	2,434.05	157.93
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*94.75*	
26 09 23 00-0041	EA	100 Amperes, 2 Pole, NEMA 4 Enclosure, Electrically Held, Lighting Contactor	3,666.38	214.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*128.59*	
26 09 23 00-0042	EA	200 Amperes, 2 Pole, NEMA 4 Enclosure, Electrically Held, Lighting Contactor	7,184.73	282.00
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*169.20*	
26 09 23 00-0043		**3-Pole, NEMA 4 Enclosure, Electrically Held, Lighting Contactors** *(26 09 23 00-0036)*		
26 09 23 00-0044	EA	20 Amperes, 3 Pole, NEMA 4 Enclosure, Electrically Held, Lighting Contactor	1,007.24	101.52
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*60.91*	
26 09 23 00-0045	EA	30 Amperes, 3 Pole, NEMA 4 Enclosure, Electrically Held, Lighting Contactor	1,318.63	112.80
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*67.68*	
26 09 23 00-0046	EA	60 Amperes, 3 Pole, NEMA 4 Enclosure, Electrically Held, Lighting Contactor	2,541.72	180.48
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*108.29*	
26 09 23 00-0047	EA	100 Amperes, 3 Pole, NEMA 4 Enclosure, Electrically Held, Lighting Contactor	3,831.31	236.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*142.13*	
26 09 23 00-0048	EA	200 Amperes, 3 Pole, NEMA 4 Enclosure, Electrically Held, Lighting Contactor	7,512.54	310.20
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*186.12*	
26 09 23 00-0049		**4-Pole, NEMA 4 Enclosure, Electrically Held, Lighting Contactors** *(26 09 23 00-0036)*		
26 09 23 00-0050	EA	20 Amperes, 4 Pole, NEMA 4 Enclosure, Electrically Held, Lighting Contactor	1,086.58	112.80
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*67.68*	
26 09 23 00-0051	EA	30 Amperes, 4 Pole, NEMA 4 Enclosure, Electrically Held, Lighting Contactor	1,463.11	124.09
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*74.45*	
26 09 23 00-0052	EA	60 Amperes, 4 Pole, NEMA 4 Enclosure, Electrically Held, Lighting Contactor	3,281.26	203.04
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*121.83*	
26 09 23 00-0053	EA	100 Amperes, 4 Pole, NEMA 4 Enclosure, Electrically Held, Lighting Contactor	4,722.43	259.44
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*155.66*	
26 09 23 00-0054	EA	200 Amperes, 4 Pole, NEMA 4 Enclosure, Electrically Held, Lighting Contactor	10,074.10	338.40
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*203.04*	
26 09 23 00-0055		**NEMA 12/3R Enclosure, Electrically Held, Lighting Contactors** *(26 09 23 00-0002)*		
26 09 23 00-0056		**2-Pole, NEMA 12/3R Enclosure, Electrically Held, Lighting Contactors** *(26 09 23 00-0055)*		
26 09 23 00-0057	EA	60 Amperes, 2 Pole, NEMA 12/3R Enclosure, Electrically Held, Lighting Contactor	3,792.90	157.93
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*94.75*	
26 09 23 00-0058	EA	100 Amperes, 2 Pole, NEMA 12/3R Enclosure, Electrically Held, Lighting Contactor	5,395.87	214.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*128.59*	
26 09 23 00-0059	EA	200 Amperes, 2 Pole, NEMA 12/3R Enclosure, Electrically Held, Lighting Contactor	4,948.00	282.00
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*169.20*	
26 09 23 00-0060		**3-Pole, NEMA 12/3R Enclosure, Electrically Held, Lighting Contactors** *(26 09 23 00-0055)*		
26 09 23 00-0061	EA	60 Amperes, 3 Pole, NEMA 12/3R Enclosure, Electrically Held, Lighting Contactor	4,037.34	180.48
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*108.29*	
26 09 23 00-0062	EA	100 Amperes, 3 Pole, NEMA 12/3R Enclosure, Electrically Held, Lighting Contactor	5,725.74	236.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*142.13*	
26 09 23 00-0063		**4-Pole, NEMA 12/3R Enclosure, Electrically Held, Lighting Contactors** *(26 09 23 00-0055)*		
26 09 23 00-0064	EA	60 Amperes, 4 Pole, NEMA 12/3R Enclosure, Electrically Held, Lighting Contactor	1,933.44	203.04
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*121.83*	
26 09 23 00-0065	EA	100 Amperes, 4 Pole, NEMA 12/3R Enclosure, Electrically Held, Lighting Contactor	2,700.81	259.44
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*155.66*	
26 09 23 00-0066		**Mechanically Held, Lighting Contactors** *(26 09 23 00-0001)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 09 23 00-0067		NEMA 1 Enclosure, Mechanically Held, Lighting Contactors *(26 09 23 00-0066)*		
26 09 23 00-0068		2-Pole, NEMA 1 Enclosure, Mechanically Held, Lighting Contactors *(26 09 23 00-0067)*		
26 09 23 00-0069	EA	20 Amperes, 2 Pole, NEMA 1 Enclosure, Mechanically Held, Lighting Contactor	865.32	90.24
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*54.14*	
26 09 23 00-0070	EA	30 Amperes, 2 Pole, NEMA 1 Enclosure, Mechanically Held, Lighting Contactor	985.44	101.52
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*60.91*	
26 09 23 00-0071	EA	60 Amperes, 2 Pole, NEMA 1 Enclosure, Mechanically Held, Lighting Contactor	1,890.18	157.93
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*94.75*	
26 09 23 00-0072	EA	100 Amperes, 2 Pole, NEMA 1 Enclosure, Mechanically Held, Lighting Contactor	2,638.02	214.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*128.59*	
26 09 23 00-0073	EA	200 Amperes, 2 Pole, NEMA 1 Enclosure, Mechanically Held, Lighting Contactor	6,217.86	282.00
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*169.20*	
26 09 23 00-0074		3-Pole, NEMA 1 Enclosure, Mechanically Held, Lighting Contactors *(26 09 23 00-0067)*		
26 09 23 00-0075	EA	20 Amperes, 3 Pole, NEMA 1 Enclosure, Mechanically Held, Lighting Contactor	921.49	101.52
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*60.91*	
26 09 23 00-0076	EA	30 Amperes, 3 Pole, NEMA 1 Enclosure, Mechanically Held, Lighting Contactor	1,054.65	112.80
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*67.68*	
26 09 23 00-0077	EA	60 Amperes, 3 Pole, NEMA 1 Enclosure, Mechanically Held, Lighting Contactor	1,997.85	180.48
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*108.29*	
26 09 23 00-0078	EA	100 Amperes, 3 Pole, NEMA 1 Enclosure, Mechanically Held, Lighting Contactor	2,805.07	236.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*142.13*	
26 09 23 00-0079	EA	200 Amperes, 3 Pole, NEMA 1 Enclosure, Mechanically Held, Lighting Contactor	6,997.30	310.20
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*186.12*	
26 09 23 00-0080		4-Pole, NEMA 1 Enclosure, Mechanically Held, Lighting Contactors *(26 09 23 00-0067)*		
26 09 23 00-0081	EA	20 Amperes, 4 Pole, NEMA 1 Enclosure, Mechanically Held, Lighting Contactor	992.72	112.80
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*67.68*	
26 09 23 00-0082	EA	30 Amperes, 4 Pole, NEMA 1 Enclosure, Mechanically Held, Lighting Contactor	1,121.74	124.09
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*74.45*	
26 09 23 00-0083	EA	60 Amperes, 4 Pole, NEMA 1 Enclosure, Mechanically Held, Lighting Contactor	2,343.01	203.04
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*121.83*	
26 09 23 00-0084	EA	100 Amperes, 4 Pole, NEMA 1 Enclosure, Mechanically Held, Lighting Contactor	3,303.93	259.44
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*155.66*	
26 09 23 00-0085	EA	200 Amperes, 4 Pole, NEMA 1 Enclosure, Mechanically Held, Lighting Contactor	8,472.19	338.40
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*203.04*	
26 09 23 00-0086		NEMA 4 Enclosure, Mechanically Held, Lighting Contactors *(26 09 23 00-0066)*		
26 09 23 00-0087		2-Pole, NEMA 4 Enclosure, Mechanically Held, Lighting Contactors *(26 09 23 00-0086)*		
26 09 23 00-0088	EA	20 Amperes, 2 Pole, NEMA 4 Enclosure, Mechanically Held, Lighting Contactor	1,327.68	90.24
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*54.14*	
26 09 23 00-0089	EA	30 Amperes, 2 Pole, NEMA 4 Enclosure, Mechanically Held, Lighting Contactor	1,529.31	101.52
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*60.91*	
26 09 23 00-0090	EA	60 Amperes, 2 Pole, NEMA 4 Enclosure, Mechanically Held, Lighting Contactor	2,977.91	157.93
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*94.75*	
26 09 23 00-0091	EA	100 Amperes, 2 Pole, NEMA 4 Enclosure, Mechanically Held, Lighting Contactor	4,178.44	214.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*128.59*	
26 09 23 00-0092	EA	200 Amperes, 2 Pole, NEMA 4 Enclosure, Mechanically Held, Lighting Contactor	8,844.95	282.00
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*169.20*	
26 09 23 00-0093		3-Pole, NEMA 4 Enclosure, Mechanically Held, Lighting Contactors *(26 09 23 00-0086)*		
26 09 23 00-0094	EA	20 Amperes, 3 Pole, NEMA 4 Enclosure, Mechanically Held, Lighting Contactor	1,398.91	101.52
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*60.91*	
26 09 23 00-0095	EA	30 Amperes, 3 Pole, NEMA 4 Enclosure, Mechanically Held, Lighting Contactor	1,598.51	112.80
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*67.68*	
26 09 23 00-0096	EA	60 Amperes, 3 Pole, NEMA 4 Enclosure, Mechanically Held, Lighting Contactor	3,085.58	180.48
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*108.29*	
26 09 23 00-0097	EA	100 Amperes, 3 Pole, NEMA 4 Enclosure, Mechanically Held, Lighting Contactor	4,346.55	236.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*142.13*	
26 09 23 00-0098	EA	200 Amperes, 3 Pole, NEMA 4 Enclosure, Mechanically Held, Lighting Contactor	9,626.51	310.20
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*186.12*	
26 09 23 00-0099		4-Pole, NEMA 4 Enclosure, Mechanically Held, Lighting Contactors *(26 09 23 00-0086)*		
26 09 23 00-0100	EA	20 Amperes, 4 Pole, NEMA 4 Enclosure, Mechanically Held, Lighting Contactor	1,475.93	112.80
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*67.68*	
26 09 23 00-0101	EA	30 Amperes, 4 Pole, NEMA 4 Enclosure, Mechanically Held, Lighting Contactor	1,665.60	124.09
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*74.45*	
26 09 23 00-0102	EA	60 Amperes, 4 Pole, NEMA 4 Enclosure, Mechanically Held, Lighting Contactor	3,853.75	203.04
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*121.83*	
26 09 23 00-0103	EA	100 Amperes, 4 Pole, NEMA 4 Enclosure, Mechanically Held, Lighting Contactor	5,266.30	259.44
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*155.66*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 09 23 00-0104	EA	200 Amperes, 4 Pole, NEMA 4 Enclosure, Mechanically Held, Lighting Contactor	12,189.13	338.40
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*203.04*	
26 09 23 00-0105		NEMA 12/3R Enclosure, Mechanically Held, Lighting Contactors *(26 09 23 00-0066)*		
26 09 23 00-0106		2-Pole, NEMA 12/3R Enclosure, Mechanically Held, Lighting Contactors *(26 09 23 00-0105)*		
26 09 23 00-0107	EA	30 Amperes, 2 Pole, NEMA 12/3R Enclosure, Mechanically Held, Lighting Contactor	981.62	101.52
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*60.91*	
26 09 23 00-0108	EA	60 Amperes, 2 Pole, NEMA 12/3R Enclosure, Mechanically Held, Lighting Contactor	1,852.50	180.48
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*94.75*	
26 09 23 00-0109	EA	100 Amperes, 2 Pole, NEMA 12/3R Enclosure, Mechanically Held, Lighting Contactor	2,525.32	214.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*128.59*	
26 09 23 00-0110	EA	200 Amperes, 2 Pole, NEMA 12/3R Enclosure, Mechanically Held, Lighting Contactor	6,161.68	282.00
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*169.20*	
26 09 23 00-0111		3-Pole, NEMA 12/3R Enclosure, Mechanically Held, Lighting Contactors *(26 09 23 00-0105)*		
26 09 23 00-0112	EA	30 Amperes, 3 Pole, NEMA 12/3R Enclosure, Mechanically Held, Lighting Contactor	1,039.18	112.80
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*67.68*	
26 09 23 00-0113		4-Pole, NEMA 12/3R Enclosure, Mechanically Held, Lighting Contactors *(26 09 23 00-0105)*		
26 09 23 00-0114	EA	200 Amperes, 4 Pole, NEMA 12/3R Enclosure, Mechanically Held, Lighting Contactor	8,366.89	338.40
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*203.04*	
26 09 23 00-0115		Combination Lighting Contactors *(26 09 23)*		
		Note: Up to 600 volt.		
26 09 23 00-0116		Electrically Held, Combination Lighting Contactors *(26 09 23 00-0115)*		
26 09 23 00-0117		NEMA 1 Enclosure, Electrically Held, Combination Lighting Contactors *(26 09 23 00-0116)*		
26 09 23 00-0118		3-Pole, NEMA 1 Enclosure, Electrically Held, Combination Lighting Contactors *(26 09 23 00-0117)*		
26 09 23 00-0119	EA	30 Amperes, 3 Pole, NEMA 1 Enclosure, Electrically Held, Combination Lighting Contactor With Fused Disconnect Switch	1,703.24	124.09
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*74.45*	
26 09 23 00-0120	EA	60 Amperes, 3 Pole, NEMA 1 Enclosure, Electrically Held, Combination Lighting Contactor With Fused Disconnect Switch	2,667.92	198.53
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*119.12*	
26 09 23 00-0121	EA	100 Amperes, 3 Pole, NEMA 1 Enclosure, Electrically Held, Combination Lighting Contactor With Fused Disconnect Switch	4,347.28	260.57
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*156.34*	
26 09 23 00-0122	EA	200 Amperes, 3 Pole, NEMA 1 Enclosure, Electrically Held, Combination Lighting Contactor With Fused Disconnect Switch	8,024.61	341.22
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*204.73*	
26 09 23 00-0123		NEMA 4 Enclosure, Electrically Held, Combination Lighting Contactors *(26 09 23 00-0116)*		
26 09 23 00-0124		3-Pole, NEMA 4 Enclosure, Electrically Held, Combination Lighting Contactors *(26 09 23 00-0123)*		
26 09 23 00-0125	EA	30 Amperes, 3 Pole, NEMA 4 Enclosure, Electrically Held, Combination Lighting Contactor With Fused Disconnect Switch	3,151.95	124.09
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*74.45*	
26 09 23 00-0126	EA	60 Amperes, 3 Pole, NEMA 4 Enclosure, Electrically Held, Combination Lighting Contactor With Fused Disconnect Switch	4,900.63	198.53
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*119.12*	
26 09 23 00-0127	EA	100 Amperes, 3 Pole, NEMA 4 Enclosure, Electrically Held, Combination Lighting Contactor With Fused Disconnect Switch	8,243.38	260.57
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*156.34*	
26 09 23 00-0128	EA	200 Amperes, 3 Pole, NEMA 4 Enclosure, Electrically Held, Combination Lighting Contactor With Fused Disconnect Switch	13,008.45	341.22
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*204.73*	
26 09 23 00-0129		Mechanically Held, Combination Lighting Contactors *(26 09 23 00-0115)*		
26 09 23 00-0130		NEMA 1 Enclosure, Mechanically Held, Combination Lighting Contactors *(26 09 23 00-0129)*		
26 09 23 00-0131		3-Pole, NEMA 1 Enclosure, Mechanically Held, Combination Lighting Contactors *(26 09 23 00-0130)*		
26 09 23 00-0132	EA	30 Amperes, 3 Pole, NEMA 1 Enclosure, Mechanically Held, Combination Lighting Contactor With Fused Disconnect Switch	1,868.62	124.09
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*74.45*	
26 09 23 00-0133	EA	60 Amperes, 3 Pole, NEMA 1 Enclosure, Mechanically Held, Combination Lighting Contactor With Fused Disconnect Switch	3,240.41	198.53
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*119.12*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 09 23 00-0134	EA	100 Amperes, 3 Pole, NEMA 1 Enclosure, Mechanically Held, Combination Lighting Contactor With Fused Disconnect Switch	4,889.55	260.57
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*156.34*	
26 09 23 00-0135	EA	200 Amperes, 3 Pole, NEMA 1 Enclosure, Mechanically Held, Combination Lighting Contactor With Fused Disconnect Switch	9,565.56	341.22
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*204.73*	

26 09 23 00-0136 NEMA 4 Enclosure, Mechanically Held, Combination Lighting Contactors *(26 09 23 00-0129)*

26 09 23 00-0137 3-Pole, NEMA 4 Enclosure, Mechanically Held, Combination Lighting Contactors *(26 09 23 00-0136)*

26 09 23 00-0138	EA	30 Amperes, 3 Pole, NEMA 4 Enclosure, Mechanically Held, Combination Lighting Contactor With Fused Disconnect Switch	3,318.93	124.09
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*74.45*	
26 09 23 00-0139	EA	60 Amperes, 3 Pole, NEMA 4 Enclosure, Mechanically Held, Combination Lighting Contactor With Fused Disconnect Switch	5,476.30	198.53
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*119.12*	
26 09 23 00-0140	EA	100 Amperes, 3 Pole, NEMA 4 Enclosure, Mechanically Held, Combination Lighting Contactor With Fused Disconnect Switch	8,787.25	260.57
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*156.34*	
26 09 23 00-0141	EA	200 Amperes, 3 Pole, NEMA 4 Enclosure, Mechanically Held, Combination Lighting Contactor With Fused Disconnect Switch	14,549.40	341.22
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*204.73*	

26 09 23 00-0142 Automatic Lighting Controls *(26 09 23)*

Note: Includes testing of new devices and certification.

26 09 23 00-0143 Occupancy Sensor *(26 09 23 00-0142)*

26 09 23 00-0144	EA	Wall Switch Replacement Occupancy Sensor, Single Gang	140.27	
		Note: Includes integral occupancy sensor and relay.		
		For >20 To 40, Deduct	*-4.48*	
		For >40, Deduct	*-9.25*	
26 09 23 00-0145	EA	Wall Switch Replacement Occupancy Sensor, Double Gang	141.64	
		Note: Includes integral occupancy sensor and relay.		
		For >20 To 40, Deduct	*-4.54*	
		For >40, Deduct	*-9.35*	
26 09 23 00-0146	EA	Ceiling Mount Sensor Coer <500 SF, T-Bar Or Exposed Ceiling	296.55	
		Note: Includes one relay, 8' of plenum rated control wire, mounting, j-box.		
		For Installation In Finished Spline Or Sheetrock Ceiling, Add	*16.92*	
		For >20 To 40, Deduct	*-10.60*	
		For >40, Deduct	*-20.13*	
26 09 23 00-0147	EA	Ceiling Mount Sensor Coer >500 SF, T-Bar Or Exposed Ceiling	326.11	
		Note: Includes one relay, 8' of plenum rated control wire, mounting, j-box.		
		For Installation In Finished Spline Or Sheetrock Ceiling, Add	*16.92*	
		For >20 To 40, Deduct	*-12.08*	
		For >40, Deduct	*-22.34*	
26 09 23 00-0148	EA	Install Additional Switching Relay	115.42	
		Note: Includes 8' of plenum rated control wire, mounting, j-box.		
		For >20 To 40, Deduct	*-3.80*	
		For >40, Deduct	*-7.67*	
26 09 23 00-0149	EA	On Board Occupancy Sensor For Light Fixture	180.25	
		Note: Factory installed.		
		For >20 To 40, Deduct	*-9.01*	
		For >40, Deduct	*-13.52*	
26 09 23 00-0150	EA	Troubleshoot Existing Occupancy Sensor	56.02	
		Note: Test function, set sensitivity adjustment and time delay.		
		For >40, Deduct	*-2.80*	

26 09 23 00-0151 Light Level Controllers *(26 09 23 00-0142)*

26 09 23 00-0152	EA	Wall Switch Replacement Occupancy/Photo Sensor, Single Gang	140.27	
		Note: Includes integral occupancy sensor, photosensor and relay.		
		For >20 To 40, Deduct	*-4.48*	
		For >40, Deduct	*-9.25*	
26 09 23 00-0153	EA	Wall Switch Replacement Occupancy/Photo Sensor, Double Gang	141.64	
		Note: Includes integral occupancy sensor, photosensor and relay.		
		For >20 To 40, Deduct	*-4.54*	
		For >40, Deduct	*-9.35*	
26 09 23 00-0154	EA	Ceiling Mount Sensor, On/Off Control, T-Bar Or Exposed Ceiling	296.55	
		Note: Includes one relay, 8' of plenum rated control wire, mounting, j-box.		
		For Installation In Finished Spline Or Sheetrock Ceiling, Add	*16.92*	
		For >20 To 40, Deduct	*-10.60*	
		For >40, Deduct	*-20.13*	
26 09 23 00-0155	EA	Ceiling Mount Sensor, Dimming Control, T-Bar Or Exposed Ceiling	355.88	
		Note: Includes one relay, 8' of plenum rated control wire, mounting, j-box.		
		For Installation In Finished Spline Or Sheetrock Ceiling, Add	*16.92*	
		For >20 To 40, Deduct	*-13.56*	
		For >40, Deduct	*-24.58*	
26 09 23 00-0156	EA	On Board Photosensor For Light Fixture	53.70	
		Note: Factory installed.		
		For >20 To 40, Deduct	*-2.69*	
		For >40, Deduct	*-4.03*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 09 23 00-0157	EA	On Board Dual Technology Occupancy/Photosensor For Light Fixture Note: Factory installed.	217.24	
		For >20 To 40, Deduct	*-10.86*	
		For >40, Deduct	*-16.29*	
26 09 23 00-0158		**Timer Controls** *(26 09 23 00-0142)*		
26 09 23 00-0159	EA	In Wall Timers Note: Electronic; direct wall switch replacement for switchleg.	286.70	
		For >20 To 40, Deduct	*-10.11*	
		For >40, Deduct	*-19.39*	
26 09 23 00-0160	EA	Electronic Timeclock, 365-Day Single Channel For Lighting Note: Including indoor rated enclosure, terminations, 3-pole contactor.	754.78	
		For >20 To 40, Deduct	*-33.23*	
		For >40, Deduct	*-54.35*	
26 09 23 00-0161	EA	Electronic Timeclock, 365-Day Two Channel For Lighting Note: Including indoor rated enclosure, terminations, (2) 3-pole contactor.	914.65	
		For >20 To 40, Deduct	*-41.22*	
		For >40, Deduct	*-66.34*	
26 09 23 00-0162	EA	8 Channel Combined DI/DO Lighting Energy Management System Note: Includes enclosure, terminations, low voltage components, contactors, overrides, programming, field wiring, network connection/modem.	4,896.32	
		For >20 To 40, Deduct	*-132.02*	
		For >40, Deduct	*-310.82*	
26 09 23 00-0163	EA	16 Channel Combined DI/DO Lighting Energy Management System Note: Includes enclosure, terminations, low voltage components, contactors, overrides, programming, field wiring, network connection/modem.	6,100.12	
		For >20 To 40, Deduct	*-158.37*	
		For >40, Deduct	*-384.19*	
26 09 23 00-0164	EA	32 Channel Combined DI/DO Lighting Energy Management System Note: Includes enclosure, terminations, low voltage components, contactors, overrides, programming, field wiring, network connection/modem.	7,396.62	
		For >20 To 40, Deduct	*-189.35*	
		For >40, Deduct	*-464.51*	
26 09 23 00-0165		**Exterior Photocell** *(26 09 23 00-0142)*		
26 09 23 00-0166	EA	Plug-in Exterior Photocell For Existing Fixture	81.36	
		For >20 To 40, Deduct	*-3.22*	
		For >40, Deduct	*-5.68*	
26 09 23 00-0167	EA	Mount And Wire To Control Single Fixture	152.09	
26 09 23 00-0168	EA	Mount And Wire To Control Multiple Fixtures (Entire Switchleg) Note: Includes 8' wire, conduit, exterior rated mounting box.	157.73	
26 09 23 00-0169		**Photo-Cell, Relay, Lighting Arrester, Receptacle And Bracket** *(26 09 23)*		
26 09 23 00-0170	EA	105 To 130 Volt Relay, Photo-Cell, Lighting Arrester, Receptacle And Bracket	135.32	29.33
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*17.63*	
26 09 23 00-0171	EA	105 To 285 Volt Relay, Photo-Cell, Lighting Arrester, Receptacle And Bracket	148.01	29.33
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*17.63*	
26 09 23 00-0172		**Dimming Module System (Lutron Grafik Eye)** *(26 09 23)*		
26 09 23 00-0173	EA	2,000 Watt Dimming Capacity, 120/277 Volt, Dimming Module System (Lutron Grafik Eye Hi-Power HP-2)	1,815.33	112.80
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*67.68*	
26 09 23 00-0174	EA	4,000 Watt Dimming Capacity, 120/277 Volt, Dimming Module System (Lutron Grafik Eye Hi-Power HP-4)	2,355.25	112.80
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*67.68*	
26 09 23 00-0175	EA	6,000 Watt Dimming Capacity, 120/277 Volt, Dimming Module System (Lutron Grafik Eye Hi-Power HP-6)	2,904.80	112.80
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*67.68*	
26 09 23 00-0176		**Dimming Module Contol (Leviton)** *(26 09 23)*		
26 09 23 00-0177	EA	5 Amperes, Wireless Dimming Module (Leviton WSD05-9D0)	235.01	14.13
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.48*	
26 09 23 00-0178		**Light Control Panels** *(26 09 23)*		
26 09 23 00-0179		**Lighting Control Panels (Watt Stopper)** *(26 09 23 00-0178)*		
26 09 23 00-0180		**Lighting Control Panels (Watt Stopper)** *(26 09 23 00-0179)*		
26 09 23 00-0181	EA	4 Relays, Surface Mount, Lighting Control Panel (Watt Stopper LP8S-4)	2,064.05	158.20
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*94.92*	
26 09 23 00-0182	EA	8 Relays, Surface Mount, Lighting Control Panel (Watt Stopper LP8S-8)	1,927.67	169.50
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*101.70*	
26 09 23 00-0183	EA	8 Relays, Surface Mount, Lighting Control Panel With Group Switching Card (Watt Stopper LP8S-8-G)	2,176.02	169.50
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*101.70*	
26 09 23 00-0184	EA	8 Relays, Surface Mount, Lighting Control Panel With DIN Rail (Watt Stopper LP24S-8)	3,287.44	169.50
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*101.70*	
26 09 23 00-0185	EA	8 Relays, Surface Mount, Lighting Control Panel With Group Switching Card And DIN Rail (Watt Stopper LP24S-8-G)	3,579.01	169.50
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*101.70*	
26 09 23 00-0186	EA	4 Relays, Flush Mount, Lighting Control Panel (Watt Stopper LP8F-4)	2,302.89	158.20
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*94.92*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 09 23 00-0187	EA	8 Relays, Flush Mount, Lighting Control Panel (Watt Stopper LP8F-8)	2,471.14	169.50
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*101.70*	
26 09 23 00-0188	EA	8 Relays, Flush Mount, Lighting Control Panel With Group Switching Card (Watt Stopper LP8F-8-G)	2,762.43	169.50
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*101.70*	
26 09 23 00-0189	EA	8 Relays, Flush Mount, Lighting Control Panel With DIN Rail (Watt Stopper LP24F-8)	3,403.96	169.50
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*101.70*	
26 09 23 00-0190	EA	8 Relays, Flush Mount, Lighting Control Panel With Group Switching Card And DIN Rail (Watt Stopper LP24F-8-G)	3,695.51	169.50
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*101.70*	
26 09 23 00-0191		**Accessories For Lighting Control Panels (Watt Stopper)** *(26 09 23 00-0179)*		
26 09 23 00-0192	EA	Low Voltage Photocell For Watt Stopper Lighting Control Panels (Watt Stopper EM-24A2)	194.96	28.25
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.95*	
26 09 23 00-0193	EA	Automatic Control Switch For Watt Stopper Lighting Control Panels (Watt Stopper AS-100-W)	149.71	22.60
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.56*	
26 09 23 00-0194	EA	Low Voltage Momentary Switch For Watt Stopper Lighting Control Panels (Watt Stopper DCC2)	74.79	22.60
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.56*	
26 09 23 00-0195		**Lighting Control Panels (Synergy)** *(26 09 23 00-0178)*		
26 09 23 00-0196		**Lighting Control Panels (Synergy)** *(26 09 23 00-0195)*		
26 09 23 00-0197	EA	8 Relays, Surface Mount, Lighting Control Panel (Synergy SwitchPak SPAK 8S)	2,883.70	169.50
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*101.70*	
26 09 23 00-0198		**Accessories For Lighting Control Panels (Synergy)** *(26 09 23 00-0195)*		
26 09 23 00-0199	EA	Outdoor Photocell For Synergy SwitchPak Lighting Control Panels (Synergy LSA-APS-OL)	711.23	28.25
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.95*	
26 09 23 00-0200	EA	Sweepswitch, Line Voltage Override Switch For Synergy SwitchPak Lighting Control Panels (Synergy SSPL-20)	275.37	11.30
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.78*	
26 09 23 00-0201	EA	Override Switch For Synergy SwitchPak Lighting Control Panels (Synergy LVPS-2BT)	152.85	16.95
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.17*	
26 09 23 00-0202		**Lighting Switching Panels (Lutron)** *(26 09 23 00-0178)*		
26 09 23 00-0203		**Lighting Switching Panels (Lutron)** *(26 09 23 00-0202)*		
26 09 23 00-0204	EA	8 Switch Legs, Surface Mount, Feed-Through, Lighting Switching Panels (Lutron Softswitch128® XPS8-FT)	2,337.25	169.50
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*101.70*	
26 09 23 00-0205	EA	12 Switch Legs, Surface Mount, Feed-Through, Lighting Switching Panels (Lutron Softswitch128® XPS12-FT)	3,219.81	180.80
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*108.48*	
26 09 23 00-0206	EA	16 Switch Legs, Surface Mount, Feed-Through, Lighting Switching Panels (Lutron Softswitch128® XPS16-FT)	4,229.54	192.09
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*115.26*	
26 09 23 00-0207		**Wireless (ZigBee) LED Lighting Control Panels (PlanLED GigaTera)** *(26 09 23 00-0178)*		
26 09 23 00-0208	EA	6 Zone, Surface Mount, 0 To 10 Volt Dimming, Wireless (ZigBee) LED Lighting Control Panel (PlanLED GigaTera IPC6Z)	1,549.88	158.20
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*94.92*	
26 09 23 00-0209	EA	12 Zone, Surface Mount, 0 To 10 Volt Dimming, Wireless (ZigBee) LED Lighting Control Panel (PlanLED GigaTera IPC12Z)	1,774.15	158.20
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*94.92*	
26 09 23 00-0210	EA	18 Zone, Surface Mount, 0 To 10 Volt Dimming, Wireless (ZigBee) LED Lighting Control Panel (PlanLED GigaTera IPC18Z)	1,998.42	158.20
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*94.92*	
26 09 23 00-0211		**Power Filters** *(26 09 23 00-0178)*		
26 09 23 00-0212	EA	600 Amperes, 480/277 Volt, 4 Conductor Power Filter With 80" X 60" X 17" Enclosure	39,873.92	939.97
26 09 23 00-0213	EA	200 Amperes, 480/277 Volt, 4 Conductor Power Filter With 25" X 40" X 17" Enclosure	23,613.74	408.67
26 09 23 00-0214		**Signal Filters** *(26 09 23 00-0178)*		
26 09 23 00-0215	EA	0.5 Amperes, 125 Volt, 500 Conductor Signal Filter With 19" X 36-3/4" X 19-1/8 Case	18,173.13	854.57
26 09 23 00-0216	EA	0.5 Amperes, 125 Volt, 200 Conductor Signal Filter With 29" X 40" X 11" Case	12,442.61	522.26
26 09 23 00-0217	EA	0.5 Amperes, 125 Volt, 3 Pair Conductor Signal Filter With 12" X 12" X 4" Case	6,938.77	303.21
26 09 23 00-0218	EA	5 Amperes, 24 Volt DC, 5 Volt, 2 - 1 Pair Conductor Signal Filter With Case	9,471.70	303.21
26 09 23 00-0219		**Lighting Control Devices (Encelium)** *(26 09 23)*		
26 09 23 00-0220	EA	8 Port, G4, Wired Energy Control Unit, GreenBus II™ (120 Volt) With Polaris 3D™ (Encelium EN-ECU-G4-P3D) Note: Excludes GB II cable.	16,948.02	113.00
26 09 23 00-0221	EA	Server, System Support Unit (SSU) (Encelium EN-SSU-1U) Note: Excludes GB II and Ethernet cable.	7,727.59	113.00
26 09 23 00-0222	EA	Server, System Support Unit (SSU), VIRTUAL (Encelium EN-SW-SSUVIRT) Note: Excludes GB II and Ethernet cable.	4,003.91	113.00
26 09 23 00-0223	EA	Server, System Support Unit (SSU) With BACnet (Encelium EN-SSU-BIF-KIT) Note: Excludes GB II and Ethernet cable.	17,047.91	113.00
26 09 23 00-0224	EA	Isolated, Wired Luminaire Control Module (Encelium EN-iLCM-1R10V-GB2-BK) Note: Excludes GB II cable.	129.68	14.13

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 09 23 00-0225	EA	Damp Rated, Isolated, Wired Luminaire Control Module (Encelium EN-iLCM-1R10V-GB2-BK/DR) Note: Excludes GB II cable.	203.46	14.13
26 09 23 00-0226	EA	Wired Area Lighting Controller, Heavy-Duty Relay With 0-10V Dimming (Encelium EN-ALC-1R10V-GB2-BK) Note: Excludes GB II cable.	252.55	28.25
26 09 23 00-0227	EA	Damp Rated, Wired Area Lighting Controller, Heavy-Duty Relay With 0-10V Dimming (Encelium EN-ALC-1R10V-GB2-BK-DR) Note: Excludes GB II cable.	306.78	28.25
26 09 23 00-0228	EA	Wired Sensor Interface Module (Encelium EN-SIM-AI/SPS-GB2-BK) Note: Excludes GB II cable.	157.93	28.25
26 09 23 00-0229	EA	Damp Rated, Wired Sensor Interface Module (Encelium EN-SIM-AI/SPS-GB2-BK/DR) Note: Excludes GB II cable.	231.71	28.25
26 09 23 00-0230	EA	16 Port, Rack Mounted, Wired Ethernet Switch (Encelium ETH-700) Note: Excludes cable.	588.54	56.50
26 09 23 00-0231	EA	Rack Mounted, Wired Power Bar (Encelium PWR-700)	436.97	56.50
26 09 23 00-0232	EA	Rack Mounted, Wired Power Bar With Surge Protection (Encelium PWR-800)	817.98	56.50
26 09 23 00-0233	EA	Wall Mounted, 4U Mounting Rack (Encelium RCK-700)	265.70	56.50
26 09 23 00-0234	EA	4 Port, 10/100 VPN, Dual WAN, Wired Router (Encelium RV042) Note: Excludes cable.	919.47	56.50
26 09 23 00-0235	EA	Wired BACnet Interface (Encelium BIF-600) Note: Excludes cable.	9,772.32	225.99
26 09 23 00-0236	EA	Wired AV Interface (Encelium EN-SW-AVINT) Note: Excludes cable.	7,273.93	56.50
26 09 23 00-0237	EA	Two Button, GB2, Wired Wall Station (Encelium EN-WS-2B-GB2-WH) Note: Includes white finish. Excludes GB II cable.	268.11	14.13
26 09 23 00-0238	EA	3 Scene, GB2, Wired Wall Station (Encelium EN-WS-SC3-GB2-WH) Note: Includes white finish. Excludes GB II cable.	328.04	14.13
26 09 23 00-0239	EA	3 Zone, GB2, Wired Wall Station (Encelium EN-WS-ZC3-GB2-WH) Note: Includes white finish. Excludes GB II cable.	313.58	14.13
26 09 23 00-0240	EA	5 Scene, GB2, Wired Wall Station (Encelium EN-WS-SC5-GB2-WH) Note: Includes white finish. Excludes GB II cable.	328.04	14.13
26 09 23 00-0241	EA	6 Zone, GB2, Wired Wall Station (Encelium EN-WS-ZC6-GB2-WH) Note: Includes white finish. Excludes GB II cable.	313.58	14.13
26 09 23 00-0242	EA	Rocker Switch, GB2, Wired Wall Station (Encelium EN-WS-R-GB2-WT) Note: Includes white finish. Excludes GB II cable.	235.71	14.13
26 09 23 00-0243	EA	Scene Controller, GB2, Wired Wall Station (Encelium EN-WS-SC3D-GB2-WT) Note: Includes white finish. Excludes GB II cable.	328.04	14.13
26 09 23 00-0244	EA	3 Zone Controller, GB2, Wired Wall Station (Encelium EN-WS-ZC3-GB2-WT) Note: Includes white finish. Excludes GB II cable.	313.58	14.13
26 09 23 00-0245	EA	Wired Key Switch Controller (Encelium KSW-300) Note: Excludes GB II cable.	229.88	14.13
26 09 23 00-0246	EA	Wall Station Surface Mount Kit (Encelium EN-SMK-ZB-WH) Note: Includes white finish.	95.00	14.13
26 09 23 00-0247	EA	1/2' Length, Pre-Terminated, GreenBus II™ Cable (Encelium EN-PTC-0.5FT-GB2)	71.66	28.25
26 09 23 00-0248	EA	1' Length, Pre-Terminated, GreenBus II™ Cable (Encelium EN-PTC-01FT-GB2)	72.31	28.25
26 09 23 00-0249	EA	5' Length, Pre-Terminated, GreenBus II™ Cable (Encelium EN-PTC-05FT-GB2)	77.41	28.25
26 09 23 00-0250	EA	10' Length, Pre-Terminated, GreenBus II™ Cable (Encelium EN-PTC-10FT-GB2)	82.45	28.25
26 09 23 00-0251	EA	15' Length, Pre-Terminated, GreenBus II™ Cable (Encelium EN-PTC-15FT-GB2)	88.47	28.25
26 09 23 00-0252	EA	20' Length, Pre-Terminated, GreenBus II™ Cable (Encelium EN-PTC-20FT-GB2)	93.90	28.25
26 09 23 00-0253	EA	25' Length, Pre-Terminated, GreenBus II™ Cable (Encelium EN-PTC-25FT-GB2)	100.56	28.25
26 09 23 00-0254	EA	50' Length, Pre-Terminated, GreenBus II™ Cable (Encelium EN-PTC-50FT-GB2)	130.70	28.25
26 09 23 00-0255	EA	1,000' Box, GreenBus II™ Cable (Encelium EN-BC-1000FT-GB2)	892.49	28.25
26 09 23 00-0256	EA	Box Of 50, Greenbus II™ Connectors (Encelium EN-CON-50-GB2)	209.45	28.25
26 09 23 00-0257	EA	1,000' Box, Category 5, Network Cable (Encelium NWC-400-B)	1,154.97	28.25
26 09 23 00-0258	EA	Indoor Wired Photo Sensor (Encelium PHS-700) Note: Excludes GB II cable.	662.25	56.50
26 09 23 00-0259	EA	Outdoor Wired Photo Sensor (Encelium PHS-800) Note: Excludes GB II cable.	662.25	56.50
26 09 23 00-0260	EA	Skylight Wired Photo Sensor (Encelium PHS-900) Note: Excludes GB II cable.	662.25	56.50
26 09 23 00-0261	EA	450 SF, 360 Degree, Passive Infrared, Ceiling Mounted, Wired Occupancy Sensor (Encelium SCP-0450) Note: Excludes GB II cable.	335.65	56.50
26 09 23 00-0262	EA	1,500 SF, 360 Degree, Passive Infrared, Ceiling Mounted, Wired Occupancy Sensor (Encelium SCP-1500) Note: Excludes GB II cable.	324.69	56.50
26 09 23 00-0263	EA	2,500 SF, Wide View, Passive Infrared, Wall Mounted, Wired Occupancy Sensor (Encelium SWP-WV00) Note: Excludes GB II cable.	331.99	56.50
26 09 23 00-0264	EA	High-Bay, Passive Infrared, Wall Mounted, Wired Occupancy Sensor (Encelium SWP-HBAY) Note: Excludes GB II cable.	368.50	56.50
26 09 23 00-0265	EA	Long-Range, Passive Infrared, Wall Mounted, Wired Occupancy Sensor (Encelium SWP-LRNG) Note: Excludes GB II cable.	331.99	56.50
26 09 23 00-0266	EA	120-277 Volt AC, No Neutral, Passive Infrared, Wall Switch Mounted, Wired Occupancy Sensor (Encelium SSP-LNV) Note: Excludes GB II cable.	259.01	56.50
26 09 23 00-0267	EA	High Bay, Passive Infrared, Fixture Mounted, Wired Occupancy Sensor (Encelium WSPEM24V) Note: Excludes GB II cable.	275.69	56.50
26 09 23 00-0268	EA	High Bay, Passive Infrared, Surface Mounted, Wired Occupancy Sensor (Encelium WSPSM24V) Note: Excludes GB II cable.	275.69	56.50
26 09 23 00-0269	EA	360 Degree Lens, Wired Occupancy Sensor (Encelium WSPLENS360) Note: Excludes GB II cable.	136.64	56.50
26 09 23 00-0270	EA	Passive Infrared, Wall Switch Mounted, Wired Occupancy Sensor (Encelium PW-100-24) Note: Excludes GB II cable.	341.03	56.50
26 09 23 00-0271	EA	Hallway, Wired Occupancy Sensor (Encelium HW-13) Note: Excludes GB II cable.	489.82	56.50

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 09 23 00-0272	EA	500 SF, 180 Degree, (Multi) Passive Infrared And Ultrasonic, Ceiling Mounted, Wired Occupancy Sensor (Encelium SCM-0500) Note: Excludes GB II cable.	426.89	56.50
26 09 23 00-0273	EA	1,000 SF, 360 Degree, (Multi) Passive Infrared And Ultrasonic, Ceiling Mounted, Wired Occupancy Sensor (Encelium SCM-1000) Note: Excludes GB II cable.	456.09	56.50
26 09 23 00-0274	EA	2,000 SF, 360 Degree, (Multi) Passive Infrared And Ultrasonic, Ceiling Mounted, Wired Occupancy Sensor (Encelium SCM-2000) Note: Excludes GB II cable.	470.70	56.50
26 09 23 00-0275	EA	1,200 SF, (Multi) Passive Infrared And Ultrasonic, Wall Mounted, Wired Occupancy Sensor (Encelium SWM-1200) Note: Excludes GB II cable.	423.24	56.50
26 09 23 00-0276	EA	120-277 Volt AC, No Neutral, Passive Infrared And Ultrasonic, Wall Switch Mounted, Wired Occupancy Sensor (Encelium SSM-LNV) Note: Excludes GB II cable.	350.26	56.50
26 09 23 00-0277	EA	500 SF, 180 Degree, Dual Technology, Ceiling Mounted, Wired Occupancy Sensor (Encelium OSC05-M0W) Note: Excludes GB II cable.	442.59	56.50
26 09 23 00-0278	EA	1,200 SF, 360 Degree, Dual Technology, Wall Mounted, Wired Occupancy Sensor (Encelium OSW12-M0W) Note: Excludes GB II cable.	438.77	56.50
26 09 23 00-0279	EA	2,000 SF, 360 Degree, Dual Technology, Ceiling Mounted, Wired Occupancy Sensor (Encelium OSC20-M0W) Note: Excludes GB II cable.	488.58	56.50
26 09 23 00-0280	EA	1,000 SF, 360 Degree, Dual Technology, Ceiling Mounted, Wired Occupancy Sensor (Encelium OSC10-M0W) Note: Excludes GB II cable.	473.26	56.50
26 09 23 00-0281	EA	Dual Technology, Wall Switch Mounted, Wired Occupancy Sensor (Encelium DW-100-24) Note: Excludes GB II cable.	510.68	56.50
26 09 23 00-0282	EA	Dual Technology, Wall Switch Mounted, Wired Occupancy Sensor (Encelium WSD-PDT-LV) Note: Excludes GB II cable.	473.41	56.50
26 09 23 00-0283	EA	Wide View, Dual Technology, Wired Occupancy Sensor (Encelium WV-PDT) Note: Excludes GB II cable.	473.41	56.50
26 09 23 00-0284	EA	10 Amperes, 120 Volt, Single Relay, UL924 Automatic Load Control Relay (ALCR) (Encelium ESRU1C)	305.21	56.50
26 09 23 00-0285	EA	10A, 277V, Single Relay, UL924 Automatic Load Control Relay (ALCR) (Encelium ESRH1C)	328.15	56.50
26 09 23 00-0286	EA	20 Amperes, 120 Volt, Dual Relay, UL924 Automatic Load Control Relay (ALCR) (Encelium ESR01P)	588.02	56.50
26 09 23 00-0287	EA	20A, 277V, Dual Relay, UL924 Automatic Load Control Relay (ALCR) (Encelium ESR02P)	630.14	56.50
26 09 23 00-0288	EA	10 Amperes, 120 Volt, Dual Relay, UL924 Automatic Load Control Relay (ALCR) (Encelium ESR2401D)	460.21	56.50
26 09 23 00-0289	EA	10A, 277V, Dual Relay, UL924 Automatic Load Control Relay (ALCR) (Encelium ESR2402D)	480.57	56.50
26 09 23 00-0290	EA	24 Circuit, Relay Module (Encelium EN-RPM-24C-GB2) Note: Excludes GB II cable and enclosure.	1,393.99	113.00
26 09 23 00-0291	EA	24 Circuit, 120/277V, Relay Panel With Relay Module (Encelium EN-RP-24C-GB2-120/277V) Note: Excludes GB II cable.	4,324.55	452.00
26 09 23 00-0292	EA	12 Relays, 24 Circuit, 120-347V, Emergency Relay Panel (Encelium EN-RPA12R120-347V) Note: Excludes GB II cable.	6,376.89	452.00
26 09 23 00-0293	EA	24 Relays, 24 Circuit, 120-347V, Emergency Relay Panel (Encelium EN-RPA24R120-347V) Note: Excludes GB II cable.	8,429.21	452.00
26 09 23 00-0294	EA	Wired Phase Cut Dimming Module (Encelium EN-PCDM-GB2) Note: Excludes GB II cable.	697.00	56.50
26 09 23 00-0295	EA	Wired DALI Bridge (Encelium EN-DB-1L-GB2) Note: Excludes GB II cable.	801.29	56.50
26 09 23 00-0296	EA	Wireless Manager (Encelium EN-WM-ZB-P3D) Note: Includes white finish.	2,198.71	56.50
26 09 23 00-0297	EA	Wireless Control Module (Encelium EN-WCM-ZB)	292.88	28.25
26 09 23 00-0298	EA	Damp Rated, Wireless Control Module (Encelium EN-WCM-ZB-DR)	348.50	28.25
26 09 23 00-0299	EA	Wireless Area Lighting Controller (Encelium EN-ALC-ZB-BK)	349.89	28.25
26 09 23 00-0300	EA	Damp Rated, Wireless Area Lighting Controller (Encelium EN-ALC-ZB-BK-DR)	363.00	28.25
26 09 23 00-0301	EA	2 Button Switch, Wireless Wall Station (Encelium EN-WS-2B-ZB-WH) Note: Includes white finish.	264.63	14.13
26 09 23 00-0302	EA	3 Scene Control, Wireless Wall Station (Encelium EN-WS-SC3-ZB-WH) Note: Includes white finish.	264.63	14.13
26 09 23 00-0303	EA	3 Zone Control, Wireless Wall Station (Encelium EN-WS-ZC3-ZB-WH) Note: Includes white finish.	264.63	14.13
26 09 23 00-0304	EA	5 Scene Control, Wireless Wall Station (Encelium EN-WS-SC5-ZB-WH) Note: Includes white finish.	264.63	14.13
26 09 23 00-0305	EA	6 Zone Control, Wireless Wall Station (Encelium EN-WS-ZC6-ZB-WH) Note: Includes white finish.	264.63	14.13
26 09 23 00-0306	EA	Single Zone On/Off, Wireless Rocker Switch (Encelium WSS0S-DOW)	273.66	14.13
26 09 23 00-0307	EA	315 MHz, Wireless Photocell (Encelium TAP-17C)	571.86	56.50
26 09 23 00-0308	EA	450 SF, Ceiling Mounted, Wireless Sensor With Photocell (Encelium EN-SCPPH-0450-ZB)	349.38	56.50
26 09 23 00-0309	EA	1,500 SF, Ceiling Mounted, Wireless Sensor With Photocell (Encelium EN-SCPPH-1500-ZB)	349.38	56.50
26 09 23 00-0310	EA	1,500 SF, Damp Rated, Ceiling Mounted, Wireless Sensor With Photocell (Encelium EN-SCPPH-1500-ZB-DR)	405.00	56.50
26 09 23 00-0311	EA	450 SF, Damp Rated, Ceiling Mounted, Wireless Sensor With Photocell (Encelium EN-SCPPH-0450-ZB-DR)	405.00	56.50
26 09 23 00-0312	EA	2 Button Switch, Wireless Wall Station (Encelium EN-WS-2B-ZB-WH) Note: Includes white finish.	264.63	14.13
26 09 23 00-0313	EA	3 Scene Control, Wireless Wall Station (Encelium EN-WS-SC3-ZB-WH) Note: Includes white finish.	264.63	14.13
26 09 23 00-0314	EA	3 Zone Control, Wireless Wall Station (Encelium EN-WS-ZC3-ZB-WH) Note: Includes white finish.	264.63	14.13
26 09 23 00-0315	EA	5 Scene Control, Wireless Wall Station (Encelium EN-WS-SC5-ZB-WH) Note: Includes white finish.	264.63	14.13
26 09 23 00-0316	EA	6 Zone Control, Wireless Wall Station (Encelium EN-WS-ZC6-ZB-WH) Note: Includes white finish.	264.63	14.13
26 09 23 00-0317	EA	Single Zone On/Off, Wireless Rocker Switch (Encelium WSS0S-DOW) Note: Includes white finish.	273.66	14.13
26 09 23 00-0318	EA	315 MHz, Wireless Photocell (Encelium TAP-17C)	571.86	56.50
26 09 23 00-0319	EA	3 Zone Control, Wireless Wall Station (Encelium EN-WS-ZC3-ZB-WH)	264.63	14.13
26 09 23 00-0320	EA	5 Scene Control, Wireless Wall Station (Encelium EN-WS-SC5-ZB-WH)	264.63	14.13

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 09 23 00-0321	EA	6 Zone Control, Wireless Wall Station (Encelium EN-WS-ZC6-ZB-WH)	264.63	14.13
26 09 23 00-0322	EA	Single Zone On/Off, Wireless Rocker Switch (Encelium WSS0S-DOW)	273.66	14.13
26 09 23 00-0323	EA	315 MHz, Wireless Photocell (Encelium TAP-17C)	571.86	56.50
26 09 23 00-0324	EA	450 SF, Ceiling Mounted, Wireless Sensor With Photocell (Encelium EN-SCPPH-0450-ZB)	349.38	56.50
26 09 23 00-0325	EA	1,500 SF, Ceiling Mounted, Wireless Sensor With Photocell (Encelium EN-SCPPH-1500-ZB)	349.38	56.50
26 09 23 00-0326	EA	1,500 SF, Damp Rated, Ceiling Mounted, Wireless Sensor With Photocell (Encelium EN-SCPPH-1500-ZB-DR)	405.00	56.50
26 09 23 00-0327	EA	450 SF, Damp Rated, Ceiling Mounted, Wireless Sensor With Photocell (Encelium EN-SCPPH-0450-ZB-DR)	405.00	56.50
26 09 23 00-0328	EA	2 Button Switch, Wireless Wall Station (Encelium EN-WS-2B-ZB-WH) Note: Includes white finish.	264.63	14.13
26 09 23 00-0329	EA	3 Scene Control, Wireless, Wall Station (Encelium EN-WS-SC3-ZB-WH) Note: Includes white finish.	264.63	14.13
26 09 23 00-0330	EA	3 Zone Control, Wireless Wall Station (Encelium EN-WS-ZC3-ZB-WH) Note: Includes white finish.	264.63	14.13
26 09 23 00-0331	EA	5 Scene Control, Wireless Wall Station (Encelium EN-WS-SC5-ZB-WH) Note: Includes white finish.	264.63	14.13
26 09 23 00-0332	EA	6 Zone Control, Wireless Wall Station (Encelium EN-WS-ZC6-ZB-WH) Note: Includes white finish.	264.63	14.13
26 09 23 00-0333	EA	Single Zone On/Off, Wireless Rocker Switch (Encelium WSS0S-DOW)	273.66	14.13
26 09 23 00-0334	EA	315 MHz, Wireless Photocell (Encelium TAP-17C)	571.86	56.50
26 09 23 00-0335	EA	Ceiling Mounted, Wireless Mounting Kit (Encelium EN-SCPPH-MK-ZB)	144.97	56.50
26 09 23 00-0336	EA	Wireless Ethernet Transceiver Unit (cns-enocean Connectivity Kit)	754.82	56.50
26 09 23 00-0337		**Lighting Control Sensors** *(26 09 23)*		
26 09 23 00-0338	EA	DALIMulti Sensor, 600 SF (Fifthlight FLT-MTS6-DALI)	404.01	25.42
26 09 23 00-0339	EA	DALIMulti Sensor, 1,200 SF (Fifthlight FLT-MTS12-DALI)	404.01	25.42
26 09 23 00-0340	EA	Smart Multi-sensor (LG 9SD131VVDA.ALWB000)	352.76	25.42
26 09 23 00-0341	EA	Zigbee Dongle (LG 9CM2315VD2.AWP01U)	104.98	16.95
26 09 23 00-0342	EA	Clip for Performance Troffer (LG BKTTR015122.BUAAWAA)	7.79	
26 09 23 00-0343	EA	Clip for Downlight (BKTCE015123.BUAAWAA)	68.96	
26 09 23 00-0344	EA	Clip for Tube (LG BKTTU015121.BUAAWAA)	11.52	
26 09 23 00-0345		**Radio Controlled Devices (Lutron)** *(26 09 23)*		
26 09 23 00-0346		**Tabletop Transmitters For Radio Controlled Devices** *(26 09 23 00-0345)*		
26 09 23 00-0347		**Switched Lighting Controls, Tabletop Wireless Transmitter** *(26 09 23 00-0346)*		
26 09 23 00-0348	EA	One Zone Of On/Off Switched Lighting Controls, Tabletop Wireless Transmitter (Lutron RTA-TX-SW-B-WH)	539.73	16.95
26 09 23 00-0349	EA	Two Zones Of On/Off Switched Lighting Controls, Tabletop Wireless Transmitter (Lutron RTA-TX-2SW-B-WH)	703.40	16.95
26 09 23 00-0350	EA	Three Zones Of On/Off Switched Lighting Controls, Tabletop Wireless Transmitter (Lutron RTA-TX-3SW-B-WH)	887.54	16.95
26 09 23 00-0351		**Dimmable Lighting Controls, Tabletop Wireless Transmitter** *(26 09 23 00-0346)*		
26 09 23 00-0352	EA	One Zone Of Dimmable Lighting Controls, Tabletop Wireless Transmitter (Lutron RTA-TX-L-B-WH)	539.73	16.95
26 09 23 00-0353	EA	Two Zones Of Dimmable Lighting Controls, Tabletop Wireless Transmitter (Lutron RTA-TX-2L-B-WH)	642.03	16.95
26 09 23 00-0354	EA	Three Zones Of Dimmable Lighting Controls, Tabletop Wireless Transmitter (Lutron RTA-TX-3L-B-WH)	887.54	16.95
26 09 23 00-0355	EA	One Zone Of Four Pre Set Lighting Levels And Dimmable Lighting Controls, Tabletop Wireless Transmitter (Lutron RTA-TX-L-WH)	539.73	16.95
26 09 23 00-0356	EA	Two Zones Of Four Pre Set Lighting Levels And Dimmable Lighting Controls, Tabletop Wireless Transmitter (Lutron RTA-TX-2L-WH)	703.40	16.95
26 09 23 00-0357	EA	Three Zones Of Four Pre Set Lighting Levels And Dimmable Lighting Controls, Tabletop Wireless Transmitter (Lutron RTA-TX-3L-WH)	887.54	16.95
26 09 23 00-0358		**Dimmable And Switched Lighting Controls, Tabletop Wireless Transmitter** *(26 09 23 00-0346)*		
26 09 23 00-0359	EA	One Zone Of Dimmable Lighting Controls And One Zone Of On/Off Switched Lighting Controls, Tabletop Wireless Transmitter (Lutron RTA-TX-LSW-B-WH)	703.40	16.95
26 09 23 00-0360	EA	Two Zones Of Dimmable Lighting Controls And One Zone Of On/Off Switched Lighting Controls, Tabletop Wireless Transmitter (Lutron RTA-TX-2LSW-B-WH)	887.54	16.95
26 09 23 00-0361	EA	One Zone Of Dimmable Lighting Controls And Two Zones Of On/Off Switched Lighting Controls, Tabletop Wireless Transmitter (Lutron RTA-TX-L2SW-B-WH)	887.54	16.95
26 09 23 00-0362		**Dimmable Lighting Controls And Shade Or Projection Controls, Tabletop Wireless Transmitter** *(26 09 23 00-0346)*		
26 09 23 00-0363	EA	One Zone Of Open/Stop/Close Motorized Shade Controls, Tabletop Wireless Transmitter (Lutron RTA-TX-C3-B-WH)	539.73	16.95
26 09 23 00-0364	EA	Two Zones Of Open/Stop/Close Motorized Shade Controls, Tabletop Wireless Transmitter (Lutron RTA-TX-2C3-B-WH)	703.40	16.95
26 09 23 00-0365	EA	One Zone Of Dimmable Lighting Controls And One Zone Of Output Switch Projection Screen Controls, Tabletop Wireless Transmitter (Lutron RTA-TX-LC2-B-WH)	642.03	16.95
26 09 23 00-0366	EA	Two Zones Of Dimmable Lighting Controls And One Zone Of Output Switch Projection Screen Controls, Tabletop Wireless Transmitter (Lutron RTA-TX-2LC2-B-WH)	785.24	16.95
26 09 23 00-0367	EA	One Zone Of Dimmable Lighting Controls And One Zone Of Open/Stop/Close Motorized Shade Controls, Tabletop Wireless Transmitter (Lutron RTA-TX-LC3-B-WH)	703.40	16.95
26 09 23 00-0368	EA	Two Zones Of Dimmable Lighting Controls And One Zone Of Open/Stop/Close Motorized Shade Controls, Tabletop Wireless Transmitter (Lutron RTA-TX-2LC3-B-WH)	846.62	16.95
26 09 23 00-0369	EA	One Zone Of Dimmable Lighting Controls And Two Zones Of Open/Stop/Close Motorized Shade Controls, Tabletop Wireless Transmitter (Lutron RTA-TX-L2C3-B-WH)	703.40	16.95

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 09 23 00-0370		Dimmable Lighting Controls And Sivoia QED Shade Controls, Tabletop Wireless Transmitter *(26 09 23 00-0346)*		
26 09 23 00-0371	EA	One Zone Of Sivoia QED Open/Stop/Preset Motorized Shade Controls, Tabletop Wireless Transmitter (Lutron RTA-TX-Q-B-WH)	539.73	16.95
26 09 23 00-0372	EA	Two Zones Of Sivoia QED Open/Stop/Preset Motorized Shade Controls, Tabletop Wireless Transmitter (Lutron RTA-TX-2Q-B-WH)	703.40	16.95
26 09 23 00-0373	EA	One Zone Of Dimmable Lighting Controls And One Zone Of Sivoia QED Open/Stop/Preset Motorized Shade Controls, Tabletop Wireless Transmitter (Lutron RTA-TX-LQ-B-WH)	703.40	16.95
26 09 23 00-0374	EA	Two Zones Of Dimmable Lighting Controls And One Zone Of Sivoia QED Open/Stop/Preset Motorized Shade Controls, Tabletop Wireless Transmitter (Lutron RTA-TX-2LQ-B-WH)	887.54	16.95
26 09 23 00-0375	EA	One Zone Of Dimmable Lighting Controls And Two Zones Of Sivoia QED Open/Stop/Preset Motorized Shade Controls, Tabletop Wireless Transmitter (Lutron RTA-TX-L2Q-B-WH)	703.40	16.95
26 09 23 00-0376	EA	One Zone Of Dimmable Lighting Controls, One Zone Of Sivoia QED Open/Stop/Preset Motorized Shade Controls, One Zone Of Output Controls, Tabletop Wireless Transmitter (Lutron RTA-TX-LQC2-B-WH)	887.54	16.95
26 09 23 00-0377		Output Switch Closure Controls, Tabletop Wireless Transmitter *(26 09 23 00-0346)*		
26 09 23 00-0378	EA	Five Buttons Of Output Switch Closures For Grafik Eye Systems, Tabletop Wireless Transmitter (Lutron RTA-TX-C5-WH)	539.73	16.95
26 09 23 00-0379	EA	Nine Buttons Of Output Switch Closures For Grafik Eye Systems, Tabletop Wireless Transmitter (Lutron RTA-TX-C5C4-WH)	703.40	16.95
26 09 23 00-0380	EA	Thirteen Buttons Of Output Switch Closures For Grafik Eye Systems, Tabletop Wireless Transmitter (Lutron RTA-TX-C52C4-WH)	887.54	16.95
26 09 23 00-0381		Accessories For Tabletop Wireless Transmitter *(26 09 23 00-0346)*		
26 09 23 00-0382	EA	Security Mounting Brackets For Tabletop Wireless Transmitters (Lutron RTA-SEC-WH)	110.09	16.95
26 09 23 00-0383		Wall Box Transmitters For Radio Controlled Devices *(26 09 23 00-0345)*		
26 09 23 00-0384	EA	On/Off Switched Lighting Controls, Wall Box Wireless Transmitter (Lutron RTA-WX-2BSW-WH)	498.81	16.95
26 09 23 00-0385	EA	Dimmable Lighting Controls, Wall Box Wireless Transmitter (Lutron RTA-WX-2B-WH)	539.73	16.95
26 09 23 00-0386	EA	Four Preset Lighting Level And Dimmable Lighting Controls, Wall Box Wireless Transmitter (Lutron RTA-WX-5B-WH)	539.73	16.95
26 09 23 00-0387	EA	Open/Stop/Close Motorized Shade Controls, Wall Box Wireless Transmitter (Lutron RTA-WX-C3LB-WH)	539.73	16.95
26 09 23 00-0388	EA	Up/Down Projection Screen Controls, Wall Box Wireless Transmitter (Lutron RTA-WX-C2LB-WH)	539.73	16.95
26 09 23 00-0389	EA	Open/Stop/Close Sivoia QED Shade Controls, Wall Box Wireless Transmitter (Lutron RTA-WX-Q3LB-WH)	539.73	16.95
26 09 23 00-0390		Interfaces For Radio Controlled Devices *(26 09 23 00-0345)*		
26 09 23 00-0391	EA	Incandescent And Magnetic Low Voltage Lighting Interface For Radio Controlled Devices (Lutron FDI-INC-2000)	498.81	16.95
26 09 23 00-0392	EA	Lutron Tu-Wire Ballast Interface For Radio Controlled Devices (Lutron FDI-INC-2000)	498.81	16.95
26 09 23 00-0393	EA	Electronic Low Voltage Lighting Interface For Radio Controlled Devices (Lutron FDI-ELV-1000)	498.81	16.95
26 09 23 00-0394	EA	Sivoia QED Controllable Window Treatments Contact Closure Interface For Radio Controlled Devices (Lutron SVQ-CCI-8)	1,018.47	16.95
26 09 23 00-0395	EA	RS-232 Interface For Radio Controlled Devices (Lutron RTA-RS232)	1,460.39	16.95
26 09 23 00-0396	EA	Switch Closure Input Interface For Radio Controlled (Lutron RTA-SCI)	1,460.39	16.95
26 09 23 00-0397		Fluorescent Controllers For Radio Controlled Devices *(26 09 23 00-0345)*		
26 09 23 00-0398	EA	On/Off Switched Fluorescent Controllers For Radio Controlled Devices (Lutron RTA-RX-SW)	642.03	16.95
26 09 23 00-0399	EA	Dimmable Fluorescent Controllers For Radio Controlled Devices (Lutron RTA-RX-F)	723.86	16.95
26 09 23 00-0400	EA	Switch Closures And Dimmable Fluorescent Controllers For Radio Controlled Devices (Lutron RTA-RX-F-SC)	846.62	16.95
26 09 23 00-0401		AC Motor Group Controllers For Radio Controlled Devices *(26 09 23 00-0345)*		
26 09 23 00-0402	EA	Up To Two Motors, AC Motor Group Controllers For Radio Controlled Devices (Lutron WC-2M-GC)	948.91	16.95
26 09 23 00-0403	EA	Up To Four Motors, AC Motor Group Controllers For Radio Controlled Devices (Lutron WC-4M-GC)	1,306.95	16.95
26 09 23 00-0404		Removal And Reinstallation Of Occupancy Sensors *(26 09 23)*		
26 09 23 00-0405	EA	Removal And Reinstallation Of Ceiling Mounted Occupancy Sensor Note: Includes storing and cleaning.	76.28	
26 09 23 00-0406	EA	Removal And Reinstallation Of Wall Mounted Occupancy Sensor Note: Includes storing and cleaning.	50.85	
26 09 23 00-0407		Occupancy Sensors (Watt Stopper) *(26 09 23)* Note: Includes testing of new devices and certification.		
26 09 23 00-0408		Occupancy Sensors *(26 09 23 00-0407)* Note: Exclude boxes.		
26 09 23 00-0409		Wall Switch Mounted Occupancy Sensors *(26 09 23 00-0408)*		
26 09 23 00-0410		Ultrasonic, Wall Switch Mounted Occupancy Sensors *(26 09 23 00-0409)*		
26 09 23 00-0411	EA	Ultrasonic, Wall Switch Mounted Occupancy Sensor (Watt Stopper UW-100)	145.30	11.30
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.78*	
26 09 23 00-0412	EA	Dual Relay, Ultrasonic, Wall Switch Mounted Occupancy Sensor (Watt Stopper UW-200)	172.46	11.30
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.78*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 09 23 00-0413		**Passive Infrared, Wall Switch Mounted Occupancy Sensors** *(26 09 23 00-0409)*		
26 09 23 00-0414	EA	Nightlight, Passive Infrared, Wall Switch Mounted Occupancy Sensor (Watt Stopper WN-100)	119.02	11.30
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.78*	
26 09 23 00-0415	EA	Passive Infrared, Wall Switch Mounted Occupancy Sensor (Watt Stopper WS)	110.79	11.30
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.78*	
26 09 23 00-0416	EA	Passive Infrared, Wall Switch Mounted Occupancy Sensor (Watt Stopper PW-100)	126.16	11.30
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.78*	
26 09 23 00-0417	EA	Passive Infrared, Dimmable, Wall Switch Mounted Occupancy Sensor (Watt Stopper PW-100D)	222.84	22.60
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.56*	
26 09 23 00-0418	EA	Dual Relay, Passive Infrared, Wall Switch Mounted Occupancy Sensor (Watt Stopper PW-200)	146.94	11.30
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.78*	
26 09 23 00-0419	EA	Dimmable, Passive Infrared, Wall Switch Mounted Occupancy Sensor (Watt Stopper WD)	145.23	11.30
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.78*	
26 09 23 00-0420		**Passive Infrared And Ultrasonic, Wall Switch Mounted Occupancy Sensors** *(26 09 23 00-0409)*		
26 09 23 00-0421	EA	Passive Infrared And Ultrasonic, Wall Switch Mounted Occupancy Sensor (Watt Stopper DW-100)	213.84	11.30
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.78*	
26 09 23 00-0422	EA	Dual Relay, Passive Infrared And Ultrasonic, Wall Switch Mounted Occupancy Sensor (Watt Stopper DW-200)	231.03	11.30
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.78*	
26 09 23 00-0423		**Wall Switch Mounted Occupancy Sensor Accessories** *(26 09 23 00-0409)*		
26 09 23 00-0424	EA	Single Gang, Plastic Switch Plate Cover For Occupancy Sensors (Watt Stopper ASP)	7.29	2.82
26 09 23 00-0425	EA	One Side Blank, Double Gang, Plastic Switch Plate Cover For Occupancy Sensors (Watt Stopper ASP)	8.66	2.82
26 09 23 00-0426	EA	Switch Option, Double Gang, Plastic Switch Plate Cover For Occupancy Sensors (Watt Stopper ASP)	8.66	2.82
26 09 23 00-0427		**Ceiling Mounted Occupancy Sensors** *(26 09 23 00-0408)*		
26 09 23 00-0428		**Ultrasonic, Ceiling Mounted Occupancy Sensors** *(26 09 23 00-0427)*		
26 09 23 00-0429		**25 KHZ Ultrasonic, Ceiling Mounted Occupancy Sensors** *(26 09 23 00-0428)*		
26 09 23 00-0430	EA	500 SF 360 Degree Coverage, 25 KHZ Ultrasonic, Ceiling Mounted Occupancy Sensor (Watt Stopper W-500A)	186.86	25.42
26 09 23 00-0431	EA	1,000 SF 360 Degree Coverage, 25 KHZ Ultrasonic, Ceiling Mounted Occupancy Sensor (Watt Stopper W-1000A)	216.41	25.42
26 09 23 00-0432	EA	2,000 SF 360 Degree Coverage, 25 KHZ Ultrasonic, Ceiling Mounted Occupancy Sensor (Watt Stopper W-2000A)	246.19	25.42
26 09 23 00-0433	EA	90 LF Hallway Coverage, 25 KHZ Ultrasonic, Ceiling Mounted Occupancy Sensor (Watt Stopper W-2000H)	243.50	25.42
26 09 23 00-0434		**32 KHZ Ultrasonic, Ceiling Mounted Occupancy Sensors** *(26 09 23 00-0428)*		
26 09 23 00-0435	EA	600 SF 360 Degree Coverage, 32 KHZ Ultrasonic, Ceiling Mounted Occupancy Sensor (Watt Stopper WT-605)	204.35	25.42
26 09 23 00-0436	EA	1,100 SF 360 Degree Coverage, 32 KHZ Ultrasonic, Ceiling Mounted Occupancy Sensor (Watt Stopper WT-1105)	234.33	25.42
26 09 23 00-0437	EA	2,205 SF 360 Degree Coverage, 32 KHZ Ultrasonic, Ceiling Mounted Occupancy Sensor (Watt Stopper WT-2205)	262.71	25.42
26 09 23 00-0438	EA	90 LF Hallway Coverage, 32 KHZ Ultrasonic, Ceiling Mounted Occupancy Sensor (Watt Stopper WT-2255)	267.52	25.42
26 09 23 00-0439	EA	600 SF 360 Degree Coverage, Isolated Relay, 32 KHZ Ultrasonic, Ceiling Mounted Occupancy Sensor (Watt Stopper WT-600)	222.27	25.42
26 09 23 00-0440	EA	1,100 SF 360 Degree Coverage, Isolated Relay, 32 KHZ Ultrasonic, Ceiling Mounted Occupancy Sensor (Watt Stopper WT-1100)	252.99	25.42
26 09 23 00-0441	EA	2,200 SF 360 Degree Coverage, Isolated Relay, 32 KHZ Ultrasonic, Ceiling Mounted Occupancy Sensor (Watt Stopper WT-2200)	283.59	25.42
26 09 23 00-0442	EA	90 LF Hallway Coverage, Isolated Relay, 32 KHZ Ultrasonic, Ceiling Mounted Occupancy Sensor (Watt Stopper WT-2250)	292.40	25.42
26 09 23 00-0443		**40 KHZ Ultrasonic, Ceiling Mounted Occupancy Sensors** *(26 09 23 00-0428)*		
26 09 23 00-0444	EA	500 SF 360 Degree Coverage, Isolated Relay, 40 KHZ Ultrasonic, Ceiling Mounted Occupancy Sensor (Watt Stopper UT-300-1)	213.01	25.42
26 09 23 00-0445	EA	1,000 SF 360 Degree Coverage, Isolated Relay, 40 KHZ Ultrasonic, Ceiling Mounted Occupancy Sensor (Watt Stopper UT-300-2)	248.82	25.42
26 09 23 00-0446	EA	2,000 SF 360 Degree Coverage, Isolated Relay, 40 KHZ Ultrasonic, Ceiling Mounted Occupancy Sensor (Watt Stopper UT-300-3)	278.80	25.42
26 09 23 00-0447	EA	500 SF 360 Degree Coverage, Panel Integrating, 40 KHZ Ultrasonic, Ceiling Mounted Occupancy Sensor (Watt Stopper UT-305-1)	199.82	25.42
26 09 23 00-0448	EA	1,000 SF 360 Degree Coverage, Panel Integrating, 40 KHZ Ultrasonic, Ceiling Mounted Occupancy Sensor (Watt Stopper UT-305-2)	244.95	25.42
26 09 23 00-0449	EA	2,000 SF 360 Degree Coverage, Panel Integrating, 40 KHZ Ultrasonic, Ceiling Mounted Occupancy Sensor (Watt Stopper UT-305-3)	259.57	25.42
26 09 23 00-0450	EA	500 SF 360 Degree Coverage, Line Voltage, 40 KHZ Ultrasonic, Ceiling Mounted Occupancy Sensor (Watt Stopper UT-355-1)	214.87	25.42
26 09 23 00-0451	EA	1,000 SF 360 Degree Coverage, Line Voltage, 40 KHZ Ultrasonic, Ceiling Mounted Occupancy Sensor (Watt Stopper UT-355-2)	240.86	25.42
26 09 23 00-0452	EA	2,000 SF 360 Degree Coverage, Line Voltage, 40 KHZ Ultrasonic, Ceiling Mounted Occupancy Sensor (Watt Stopper UT-355-3)	272.95	25.42
26 09 23 00-0453		**Passive Infrared, Ceiling Mounted Occupancy Sensors** *(26 09 23 00-0427)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 09 23 00-0454	EA	30 Segment, 5 Level Lens, Passive Infrared, Ceiling Mounted Occupancy Sensor (Watt Stopper WPIR)	152.37	25.42
26 09 23 00-0455	EA	HVAC/BAS, Passive Infrared, Ceiling Mounted Occupancy Sensor (Watt Stopper CI-12/24)	155.85	25.42
26 09 23 00-0456	EA	Passive Infrared, Ceiling Mounted Occupancy Sensor (Watt Stopper CI-205)	164.12	25.42
26 09 23 00-0457	EA	Line Voltage, Passive Infrared, Ceiling Mounted Occupancy Sensor (Watt Stopper CI-355)	186.30	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0458	EA	Low Profile, Isolated Relay, Passive Infrared, Ceiling Mounted Occupancy Sensor (Watt Stopper CI-305)	188.99	25.42
26 09 23 00-0459	EA	Isolated Relay, Passive Infrared, Ceiling Mounted Occupancy Sensor (Watt Stopper CI-200)	200.60	25.42
26 09 23 00-0460	EA	Low Profile, Passive Infrared, Ceiling Mounted Occupancy Sensor (Watt Stopper CI-300)	219.17	25.42
26 09 23 00-0461		Passive Infrared And Ultrasonic, Ceiling Mounted Occupancy Sensors *(26 09 23 00-0427)*		
26 09 23 00-0462	EA	1,000 SF 360 Degree Coverage, Line Voltage, Passive Infrared, Ceiling Mounted Occupancy Sensor (Watt Stopper DT-355)	262.46	25.42
26 09 23 00-0463	EA	1,000 SF 360 Degree Coverage, Isolated Relay, Passive Infrared, Ceiling Mounted Occupancy Sensor (Watt Stopper DT-300)	301.76	25.42
26 09 23 00-0464	EA	1,000 SF 360 Degree Coverage, Passive Infrared, Ceiling Mounted Occupancy Sensor (Watt Stopper DT-305)	254.12	25.42
26 09 23 00-0465		Ceiling/Wall Mounted Occupancy Sensors *(26 09 23 00-0408)*		
26 09 23 00-0466		Passive Infrared, Ceiling/Wall Mounted Occupancy Sensors *(26 09 23 00-0465)*		
26 09 23 00-0467	EA	120 LF Coverage, Low Temperature, Passive Infrared, Ceiling/Wall Mounted Occupancy Sensor (Watt Stopper CB-100-1/3)	325.30	25.42
26 09 23 00-0468	EA	2,000 SF Coverage, Low Temperature, Passive Infrared, Ceiling/Wall Mounted Occupancy Sensor (Watt Stopper CB-100)	325.30	25.42
26 09 23 00-0469		Passive Infrared And Ultrasonic, Ceiling/Wall Mounted Occupancy Sensors *(26 09 23 00-0465)*		
26 09 23 00-0470	EA	2,000 SF Coverage, Passive Infrared And Ultrasonic, Ceiling/Wall Mounted Occupancy Sensor (Watt Stopper DT-200)	301.76	25.42
26 09 23 00-0471		Occupancy Sensor Power Packs *(26 09 23 00-0407)*		
26 09 23 00-0472		Single Voltage, Occupancy Sensor Power Packs *(26 09 23 00-0471)*		
26 09 23 00-0473	EA	220 To 240 Volt AC, 20 Amperes, Occupancy Sensor Power Pack (Watt Stopper B230E-P)	100.14	22.60
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.56*	
26 09 23 00-0474	EA	347 Volt AC, 15 Amperes, Occupancy Sensor Power Pack (Watt Stopper B347D-P)	90.16	22.60
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.56*	
26 09 23 00-0475		Auxiliary, Occupancy Sensor Power Packs *(26 09 23 00-0471)*		
26 09 23 00-0476	EA	120, 277 Or 347 Volt AC, 20 Amperes, Auxiliary Occupancy Sensor Power Pack (Watt Stopper S120/277/347E-P)	81.94	22.60
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.56*	
26 09 23 00-0477		Universal Voltage, Power Packs For Occupancy Sensors *(26 09 23 00-0471)*		
26 09 23 00-0478	EA	120/277 Volt AC, 20 Amperes, Dual Voltage, Occupancy Sensor Power Pack (Watt Stopper BZ-100)	112.04	22.60
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.56*	
26 09 23 00-0479		Form C, Occupancy Sensor Power Packs *(26 09 23 00-0471)*		
26 09 23 00-0480	EA	120 Volt AC, Form C, Occupancy Sensor Power Pack (Watt Stopper A120C-P)	100.60	22.60
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.56*	
26 09 23 00-0481	EA	277 Volt AC, Form C, Occupancy Sensor Power Pack (Watt Stopper A277C-P)	100.69	22.60
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.56*	
26 09 23 00-0482		Two Relay, Occupancy Sensor Power Packs *(26 09 23 00-0471)*		
26 09 23 00-0483	EA	120 Volt AC, Two Relay, Occupancy Sensor Power Pack (Watt Stopper C120E-P)	129.53	22.60
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.56*	
26 09 23 00-0484	EA	277 Volt AC, Two Relay, Occupancy Sensor Power Pack (Watt Stopper C277E-P)	131.51	22.60
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.56*	
26 09 23 00-0485		Occupancy Sensor Power Supplies *(26 09 23 00-0471)*		
26 09 23 00-0486	EA	120 Volt AC, Occupancy Sensor Power Supply (Watt Stopper BZ-150)	114.72	22.60
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.56*	
26 09 23 00-0487	EA	277 Volt AC, Occupancy Sensor Power Supply (Watt Stopper AT-277)	275.79	22.60
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.56*	
26 09 23 00-0488		Intelligent, Occupancy Sensor Power Packs *(26 09 23 00-0471)*		
26 09 23 00-0489	EA	120/277 Volt AC, Two Relays, Two Dimming Channels, Intelligent Occupancy Sensor Power Pack (Watt Stopper LC-100)	368.56	22.60
26 09 23 00-0490		DIN Rail Mounted, Occupancy Sensor Power Packs *(26 09 23 00-0471)*		
26 09 23 00-0491	EA	120/230/277 Volt AC, DIN Rail Mounted, Occupancy Sensor Power Pack (Watt Stopper BD-100)	110.90	22.60

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 09 23 00-0492		Occupancy Sensor Accessories *(26 09 23 00-0407)*		
26 09 23 00-0493		Protective Cages For Occupancy Sensors *(26 09 23 00-0492)*		
26 09 23 00-0494	EA	Protective Cage For Occupancy Sensors (Watt Stopper WC)	65.96	8.48
26 09 23 00-0495		Mounting Brackets For Occupancy Sensors *(26 09 23 00-0492)*		
26 09 23 00-0496	EA	Mounting Bracket For Occupancy Sensor (Watt Stopper MB) Note: Includes J-plate for mounting to HID fixtures or L-plate for mounting to fluorescent fixtures, walls, shelves and girders.	47.82	14.13
26 09 23 00-0497		Occupancy/Lighting Logger *(26 09 23 00-0492)* Note: Logs when a space is occupied/vacant and when lighting is on/off.		
26 09 23 00-0498	EA	Occupancy/Lighting Logger With Connector Cable (Watt Stopper IT-200)	497.12	48.03
26 09 23 00-0499		Digital Time Light Switches *(26 09 23 00-0407)*		
26 09 23 00-0500	EA	Preset Time, Wall Switch Mounted, Digital Time Light Switch (Watt Stopper TS-400)	106.90	11.30
26 09 23 00-0501		User Interface *(26 09 23 00-0407)*		
26 09 23 00-0502	EA	36KHZ IR User Interface Config Tool (Watt Stopper LMCT-100)	445.22	
26 09 23 00-0503		Lighting Integrator Panels With Digital Lighting Management (DLM) Support *(26 09 23 00-0407)*		
26 09 23 00-0504	EA	8 Relay Capacity, Flush Mount Tub With Cover (Watt Stopper LENC8F)	1,214.72	38.35
26 09 23 00-0505	EA	8 Relay Capacity, Surface Mount Tub With Cover (Watt Stopper LENC8S)	710.96	38.35
26 09 23 00-0506	EA	24 Relay Capacity, Flush Mount Tub With Cover (Watt Stopper LENC24F)	1,710.98	81.21
26 09 23 00-0507	EA	24 Relay Capacity, Surface Mount Tub With Cover (Watt Stopper LENC24S)	1,372.93	81.21
26 09 23 00-0508	EA	48 Relay Capacity, Flush Mount Tub With Cover (Watt Stopper LENC48F)	2,187.80	112.80
26 09 23 00-0509	EA	48 Relay Capacity, Surface Mount Tub With Cover (Watt Stopper LENC48S)	1,726.68	112.80
26 09 23 00-0510	EA	8 Relay Capacity Panel Interior, 115-277 Volt, 4 Relay (Watt Stopper LMCP8-115/277-4HD)	5,631.78	45.12
26 09 23 00-0511	EA	8 Relay Capacity Panel Interior, 115-277 Volt, 8 Relay (Watt Stopper LMCP8-115/277-8HD)	6,407.38	45.12
26 09 23 00-0512	EA	8 Relay Capacity Panel Interior, 115-347 Volt, 4 Relay (Watt Stopper LMCP8-115/347-4HD)	5,600.32	45.12
26 09 23 00-0513	EA	8 Relay Capacity Panel Interior, 115-347 Volt, 8 Relay (Watt Stopper LMCP8-115/347-8HD)	6,375.91	45.12
26 09 23 00-0514	EA	8 Relay Capacity Panel Interior, 240 Volt, 4 Relay (Watt Stopper LMCP8-240-4HD)	6,214.91	45.12
26 09 23 00-0515	EA	8 Relay Capacity Panel Interior, 240 Volt, 8 Relay (Watt Stopper LMCP8-240-8HD)	6,990.49	45.12
26 09 23 00-0516	EA	24 Relay Capacity Panel Interior, 115-277 Volt, 12 Relay (Watt Stopper LMCP24-115/277-12HD)	10,730.61	90.24
26 09 23 00-0517	EA	24 Relay Capacity Panel Interior, 115-277 Volt, 24 Relay (Watt Stopper LMCP24-115/277-24HD)	13,057.29	90.24
26 09 23 00-0518	EA	24 Relay Capacity Panel Interior, 115-347 Volt, 12 Relay (Watt Stopper LMCP24-115/347-12HD)	10,713.93	90.24
26 09 23 00-0519	EA	24 Relay Capacity Panel Interior, 115-347 Volt, 24 Relay (Watt Stopper LMCP24-115/347-24HD)	13,040.61	90.24
26 09 23 00-0520	EA	24 Relay Capacity Panel Interior, 240 Volt, 12 Relay (Watt Stopper LMCP24-240-12HD)	10,790.16	90.24
26 09 23 00-0521	EA	24 Relay Capacity Panel Interior, 240 Volt, 24 Relay (Watt Stopper LMCP24-240-24HD)	13,116.91	90.24
26 09 23 00-0522	EA	48 Relay Capacity Panel Interior, 115-277 Volt, 36 Relay (Watt Stopper LMCP48-115/277-36HD)	20,917.41	135.36
26 09 23 00-0523	EA	48 Relay Capacity Panel Interior, 115-277 Volt, 48 Relay (Watt Stopper LMCP48-115/277-48HD)	23,244.15	135.36
26 09 23 00-0524	EA	48 Relay Capacity Panel Interior, 115-347 Volt, 36 Relay (Watt Stopper LMCP48-115/347-36HD)	20,900.72	135.36
26 09 23 00-0525	EA	48 Relay Capacity Panel Interior, 115-347 Volt, 48 Relay (Watt Stopper LMCP48-115/347-48HD)	23,227.47	135.36
26 09 23 00-0526	EA	48 Relay Capacity Panel Interior, 240 Volt, 36 Relay (Watt Stopper LMCP48-240-36HD)	20,977.02	135.36
26 09 23 00-0527	EA	48 Relay Capacity Panel Interior, 240 Volt, 48 Relay (Watt Stopper LMCP48-240-48HD)	23,303.70	135.36
26 09 23 00-0528		Digital High/Low Passive Infrared Fixture Integrated Outdoor Sensor *(26 09 23 00-0407)*		
26 09 23 00-0529	EA	Digital High/Low Passive Infrared Fixture Integrated Outdoor Sensor (Watt Stopper FSP-211)	229.08	36.72
26 09 23 00-0530		Occupancy Sensors (Sensor Switch) *(26 09 23)* Note: Includes testing of new devices and certification.		
26 09 23 00-0531		Occupancy Sensors (Sensor Switch) *(26 09 23 00-0530)* Note: Exclude boxes		
26 09 23 00-0532		Wall Switch Mount Occupancy Sensors (Sensor Switch) *(26 09 23 00-0531)*		
26 09 23 00-0533		Passive Infrared, Wall Switch Mount Occupancy Sensors (Sensor Switch) *(26 09 23 00-0532)*		
26 09 23 00-0534	EA	Single Pole, Low Voltage, Passive Infrared, Wall Switch Mount Occupancy Sensor (Sensor Switch WSD LV)	227.19	11.30
26 09 23 00-0535	EA	Nightlight, Line Voltage, Passive Infrared, Wall Switch Mount Occupancy Sensor (Sensor Switch WSD NL)	158.99	11.30
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.78*	
26 09 23 00-0536	EA	Single Pole, Line Voltage, Fully Automatic, Passive Infrared, Wall Switch Mount Occupancy Sensor (Sensor Switch WSD)	151.49	11.30
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.78*	
26 09 23 00-0537	EA	Single Pole, Line Voltage, Semi-Automatic, Passive Infrared, Wall Switch Mount Occupancy Sensor (Sensor Switch WSD SA)	151.49	11.30
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.78*	
26 09 23 00-0538	EA	2-Pole, Line Voltage, Passive Infrared, Wall Switch Mount Occupancy Sensor (Sensor Switch WSD 2P)	193.09	11.30
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.78*	
26 09 23 00-0539	EA	Single Pole, Passive Infrared, Large Area, Wall Switch Mount Occupancy Sensor (Sensor Switch LWS)	193.09	11.30
26 09 23 00-0540	EA	2-Pole, Passive Infrared, Large Area, Wall Switch Mount Occupancy Sensor (Sensor Switch LWS 2P)	235.73	11.30

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 09 23 00-0541	EA	Single Pole, Passive Infrared, Internally Powered, Wall Switch Mount Occupancy Sensor (Sensor Switch IPD)	193.09	11.30
26 09 23 00-0542		**Dual Technology, Wall Switch Mount Occupancy Sensors (Sensor Switch)** *(26 09 23 00-0532)*		
		Note: Includes passive infrared and microphonics detection		
26 09 23 00-0543	EA	Single Pole, Low Voltage, Passive Infrared, Wall Switch Mount Occupancy Sensor (Sensor Switch WSD PDT LV)	295.39	11.30
26 09 23 00-0544	EA	Nightlight, Line Voltage, Dual Technology, Wall Switch Mount Occupancy Sensor (Sensor Switch WSD PDT NL)	227.19	11.30
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.78*	
26 09 23 00-0545	EA	Single Pole, Line Voltage, Fully Automatic, Passive Infrared, Wall Switch Mount Occupancy Sensor (Sensor Switch WSD PDT)	222.09	11.30
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.78*	
26 09 23 00-0546	EA	Single Pole, Line Voltage, Semi-Automatic, Passive Infrared, Wall Switch Mount Occupancy Sensor (Sensor Switch WSD PDT SA)	222.09	11.30
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.78*	
26 09 23 00-0547	EA	2-Pole, Line Voltage, Passive Infrared, Wall Switch Mount Occupancy Sensor (Sensor Switch WSD PDT 2P)	261.29	11.30
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.78*	
26 09 23 00-0548	EA	Single Pole, Dual Technology, Large Area, Wall Switch Mount Occupancy Sensor (Sensor Switch LWS PDT)	261.29	11.30
26 09 23 00-0549	EA	2-Pole, Dual Technology, Large Area, Wall Switch Mount Occupancy Sensor (Sensor Switch LWS PDT 2P)	281.75	11.30
26 09 23 00-0550		**Wall Switch Mount Occupancy Sensor Accessories (Sensor Switch)** *(26 09 23 00-0532)*		
26 09 23 00-0551	EA	One Blank, 2-Gang, Plastic Switch Plate Cover For Occupancy Sensors (Sensor Switch WS BPX)	19.29	2.82
26 09 23 00-0552	EA	One Switch, 2-Gang, Plastic Switch Plate Cover For Occupancy Sensors (Sensor Switch WS SPX)	19.29	2.82
26 09 23 00-0553	EA	Two Blanks, 3-Gang, Plastic Switch Plate Cover For Occupancy Sensors (Sensor Switch WS BPX 3)	39.75	2.82
26 09 23 00-0554	EA	Two Switches, 3-Gang, Plastic Switch Plate Cover For Occupancy Sensors (Sensor Switch WS SPX 3)	39.75	2.82
26 09 23 00-0555		**360 Degree View Occupancy Sensors (Sensor Switch)** *(26 09 23 00-0531)*		
26 09 23 00-0556		**Passive Infrared, 360 Degree View Occupancy Sensors (Sensor Switch)** *(26 09 23 00-0555)*		
		Note: One photocell or dimming option per occupancy sensor		
26 09 23 00-0557	EA	Low Voltage, Passive Infrared, Ceiling Mount, Standard Range, 360 Degree View Occupancy Sensor (Sensor Switch CM 9)	255.44	25.42
26 09 23 00-0558	EA	Low Voltage, Passive Infrared, Recessed Mount, Standard Range, 360 Degree View Occupancy Sensor (Sensor Switch RM 9)	255.44	25.42
26 09 23 00-0559	EA	Low Voltage, Passive Infrared, Fixture (Box) Mount, Standard Range, 360 Degree View Occupancy Sensor (Sensor Switch CMB 9)	255.44	25.42
26 09 23 00-0560	EA	Single Pole, Line Voltage, Passive Infrared, Ceiling Mount, Standard Range, 360 Degree View Occupancy Sensor (Sensor Switch CMR 9)	272.49	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0561	EA	Single Pole, Line Voltage, Passive Infrared, Recessed Mount, Standard Range, 360 Degree View Occupancy Sensor (Sensor Switch RMR 9)	272.49	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0562	EA	Single Pole, Line Voltage, Passive Infrared, Fixture (Box) Mount, Standard Range, 360 Degree View Occupancy Sensor (Sensor Switch CMRB 9)	217.93	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0563	EA	2-Pole, Line Voltage, Passive Infrared, Ceiling Mount, Standard Range, 360 Degree View Occupancy Sensor (Sensor Switch CMR 9 2P)	340.69	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0564	EA	2-Pole, Line Voltage, Passive Infrared, Recessed Mount, Standard Range, 360 Degree View Occupancy Sensor (Sensor Switch RMR 9 2P)	340.69	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0565	EA	2-Pole, Line Voltage, Passive Infrared, Fixture (Box) Mount, Standard Range, 360 Degree View Occupancy Sensor (Sensor Switch CMRB 9 2P)	286.13	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0566	EA	Low Voltage, Passive Infrared, Ceiling Mount, Extended Range, 360 Degree View Occupancy Sensor (Sensor Switch CM 10)	255.44	25.42
26 09 23 00-0567	EA	Low Voltage, Passive Infrared, Recessed Mount, Extended Range, 360 Degree View Occupancy Sensor (Sensor Switch RM 10)	255.44	25.42
26 09 23 00-0568	EA	Low Voltage, Passive Infrared, Fixture (Box) Mount, Extended Range, 360 Degree View Occupancy Sensor (Sensor Switch CMB 10)	255.44	25.42
26 09 23 00-0569	EA	Single Pole, Line Voltage, Passive Infrared, Ceiling Mount, Extended Range, 360 Degree View Occupancy Sensor (Sensor Switch CMR 10)	272.49	25.42
26 09 23 00-0570	EA	Single Pole, Line Voltage, Passive Infrared, Recessed Mount, Extended Range, 360 Degree View Occupancy Sensor (Sensor Switch RMR 10)	272.49	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0571	EA	Single Pole, Line Voltage, Passive Infrared, Fixture (Box) Mount, Extended Range, 360 Degree View Occupancy Sensor (Sensor Switch CMRB 10)	217.93	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0572	EA	2-Pole, Line Voltage, Passive Infrared, Ceiling Mount, Extended Range, 360 Degree View Occupancy Sensor (Sensor Switch CMR 10 2P)	340.69	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0573	EA	2-Pole, Line Voltage, Passive Infrared, Recessed Mount, Extended Range, 360 Degree View Occupancy Sensor (Sensor Switch RMR 10 2P)	340.69	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0574	EA	2-Pole, Line Voltage, Passive Infrared, Fixture (Box) Mount, Extended Range, 360 Degree View Occupancy Sensor (Sensor Switch CMRB 10 2P)	286.13	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 09 23 00-0575		**Dual Technology, 360 Degree View Occupancy Sensors (Sensor Switch)** *(26 09 23 00-0555)*		
		Note: One photocell or dimming option per occupancy sensor. Includes passive infrared and microphonics detection		
26 09 23 00-0576	EA	Low Voltage, Dual Technology, Ceiling Mount, Standard Range, 360 Degree View Occupancy Sensor (Sensor Switch CM PDT 9)	323.64	25.42
26 09 23 00-0577	EA	Low Voltage, Dual Technology, Recessed Mount, Standard Range, 360 Degree View Occupancy Sensor (Sensor Switch RM PDT 9)	323.64	25.42
26 09 23 00-0578	EA	Low Voltage, Dual Technology, Fixture (Box) Mount, Standard Range, 360 Degree View Occupancy Sensor (Sensor Switch CMB PDT 9)	323.64	25.42
26 09 23 00-0579	EA	Single Pole, Line Voltage, Dual Technology, Ceiling Mount, Standard Range, 360 Degree View Occupancy Sensor (Sensor Switch CMR PDT 9)	306.59	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0580	EA	Single Pole, Line Voltage, Dual Technology, Recessed Mount, Standard Range, 360 Degree View Occupancy Sensor (Sensor Switch RMR PDT 9)	306.59	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0581	EA	Single Pole, Line Voltage, Dual Technology, Fixture (Box) Mount, Standard Range, 360 Degree View Occupancy Sensor (Sensor Switch CMRB PDT 9)	252.03	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0582	EA	2-Pole, Line Voltage, Dual Technology, Ceiling Mount, Standard Range, 360 Degree View Occupancy Sensor (Sensor Switch CMR PDT 9 2P)	374.79	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0583	EA	2-Pole, Line Voltage, Dual Technology, Recessed Mount, Standard Range, 360 Degree View Occupancy Sensor (Sensor Switch RMR PDT 9 2P)	374.79	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0584	EA	2-Pole, Line Voltage, Dual Technology, Fixture (Box) Mount, Standard Range, 360 Degree View Occupancy Sensor (Sensor Switch CMRB PDT 9 2P)	320.23	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0585	EA	Low Voltage, Dual Technology, Ceiling Mount, Extended Range, 360 Degree View Occupancy Sensor (Sensor Switch CM PDT 10)	323.64	25.42
26 09 23 00-0586	EA	Low Voltage, Dual Technology, Recessed Mount, Extended Range, 360 Degree View Occupancy Sensor (Sensor Switch RM PDT 10)	323.64	25.42
26 09 23 00-0587	EA	Low Voltage, Dual Technology, Fixture (Box) Mount, Extended Range, 360 Degree View Occupancy Sensor (Sensor Switch CMB PDT 10)	323.64	25.42
26 09 23 00-0588	EA	Single Pole, Line Voltage, Dual Technology, Ceiling Mount, Extended Range, 360 Degree View Occupancy Sensor (Sensor Switch CMR PDT 10)	306.59	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0589	EA	Single Pole, Line Voltage, Dual Technology, Recessed Mount, Extended Range, 360 Degree View Occupancy Sensor (Sensor Switch RMR PDT 10)	306.59	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0590	EA	Single Pole, Line Voltage, Dual Technology, Fixture (Box) Mount, Extended Range, 360 Degree View Occupancy Sensor (Sensor Switch CMRB PDT 10)	252.03	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0591	EA	2-Pole, Line Voltage, Dual Technology, Ceiling Mount, Extended Range, 360 Degree View Occupancy Sensor (Sensor Switch CMR PDT 10 2P)	374.79	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0592	EA	2-Pole, Line Voltage, Dual Technology, Recessed Mount, Extended Range, 360 Degree View Occupancy Sensor (Sensor Switch RMR PDT 10 2P)	374.79	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0593	EA	2-Pole, Line Voltage, Dual Technology, Fixture (Box) Mount, Extended Range, 360 Degree View Occupancy Sensor (Sensor Switch CMRB PDT 10 2P)	320.23	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0594		**Wide View And Hallway Occupancy Sensors (Sensor Switch)** *(26 09 23 00-0531)*		
26 09 23 00-0595		**Passive Infrared, Wide View And Hallway Occupancy Sensors (Sensor Switch)** *(26 09 23 00-0594)*		
26 09 23 00-0596	EA	Low Voltage, Passive Infrared, Wall Mount, Wide View Occupancy Sensor (Sensor Switch WV 16)	255.44	25.42
26 09 23 00-0597	EA	Low Voltage, Passive Infrared, Wall Mount, Hallway Occupancy Sensor (Sensor Switch HW 13)	289.54	25.42
26 09 23 00-0598	EA	Line Voltage, Passive Infrared, Wall Mount, Hallway Occupancy Sensor (Sensor Switch HWR 13)	357.74	25.42
26 09 23 00-0599	EA	Single Pole, Line Voltage, Passive Infrared, Wall Mount, Wide View Occupancy Sensor (Sensor Switch WVR 16)	340.69	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0600	EA	2-Pole, Line Voltage, Passive Infrared, Wall Mount, Wide View Occupancy Sensor (Sensor Switch WVR 16 2P)	408.89	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0601		**Dual Technology, Wide View And Hallway Occupancy Sensors (Sensor Switch)** *(26 09 23 00-0594)*		
		Note: Includes passive infrared and microphonics detection		
26 09 23 00-0602	EA	Low Voltage, Dual Technology, Wall Mount, Wide View Occupancy Sensor (Sensor Switch WV PDT 16)	323.64	25.42
26 09 23 00-0603	EA	Single Pole, Line Voltage, Dual Technology, Wall Mount, Wide View Occupancy Sensor (Sensor Switch WVR PDT 16)	374.79	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0604	EA	2-Pole, Line Voltage, Dual Technology, Wall Mount, Wide View Occupancy Sensor (Sensor Switch WVR PDT 16 2P)	442.98	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0605		**High Bay Occupancy Sensors (Sensor Switch)** *(26 09 23 00-0531)*		
26 09 23 00-0606		**Passive Infrared, High Bay Occupancy Sensors (Sensor Switch)** *(26 09 23 00-0605)*		
26 09 23 00-0607	EA	Low Voltage, Passive Infrared, Ceiling Mount, 360 Degree View, High Bay Occupancy Sensor (Sensor Switch CM 6)	255.44	25.42

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 09 23 00-0608	EA	Low Voltage, Passive Infrared, Recessed Mount, 360 Degree View, High Bay Occupancy Sensor (Sensor Switch RM 6)	255.44	25.42
26 09 23 00-0609	EA	Low Voltage, Passive Infrared, Fixture (Box) Mount, 360 Degree View, High Bay Occupancy Sensor (Sensor Switch CMB 6)	255.44	25.42
26 09 23 00-0610	EA	Single Pole, Line Voltage, Passive Infrared, Ceiling Mount, 360 Degree View, High Bay Occupancy Sensor (Sensor Switch CMR 6)	217.93	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0611	EA	Single Pole, Line Voltage, Passive Infrared, Recessed Mount, 360 Degree View, High Bay Occupancy Sensor (Sensor Switch RMR 6)	217.93	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0612	EA	Single Pole, Line Voltage, Passive Infrared, Fixture (Box) Mount, 360 Degree View, High Bay Occupancy Sensor (Sensor Switch CMRB 6)	217.93	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0613	EA	2-Pole, Line Voltage, Passive Infrared, Ceiling Mount, 360 Degree View, High Bay Occupancy Sensor (Sensor Switch CMR 6 2P)	286.13	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0614	EA	2-Pole, Line Voltage, Passive Infrared, Recessed Mount, 360 Degree View, High Bay Occupancy Sensor (Sensor Switch RMR 6 2P)	286.13	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0615	EA	2-Pole, Line Voltage, Passive Infrared, Fixture (Box) Mount, 360 Degree View, High Bay Occupancy Sensor (Sensor Switch CMRB 6 2P)	286.13	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0616	EA	208/240 Volt AC, Line Voltage, Passive Infrared, Ceiling Mount, 360 Degree View, High Bay Occupancy Sensor (Sensor Switch CMR 6 208)	241.80	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0617	EA	208/240 Volt AC, Line Voltage, Passive Infrared, Recessed Mount, 360 Degree View, High Bay Occupancy Sensor (Sensor Switch RMR 6 208)	241.80	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0618	EA	208/240 Volt AC, Line Voltage, Passive Infrared, Fixture (Box) Mount, 360 Degree View, High Bay Occupancy Sensor (Sensor Switch CMRB 6 208)	241.80	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0619	EA	480 Volt AC, Line Voltage, Passive Infrared, Ceiling Mount, 360 Degree View, High Bay Occupancy Sensor (Sensor Switch CMR 6 480)	241.80	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0620	EA	480 Volt AC, Line Voltage, Passive Infrared, Recessed Mount, 360 Degree View, High Bay Occupancy Sensor (Sensor Switch RMR 6 480)	241.80	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0621	EA	480 Volt AC, Line Voltage, Passive Infrared, Fixture (Box) Mount, 360 Degree View, High Bay Occupancy Sensor (Sensor Switch CMRB 6 480)	241.80	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0622	EA	Low Voltage, Passive Infrared, Surface Mount, Bi-Directional Aisle Way View, High Bay Occupancy Sensor (Sensor Switch HM 50)	289.54	25.42
26 09 23 00-0623	EA	Low Voltage, Passive Infrared, Recessed Mount, Bi-Directional Aisle Way View, High Bay Occupancy Sensor (Sensor Switch RM 50)	289.54	25.42
26 09 23 00-0624	EA	Low Voltage, Passive Infrared, Fixture (Box) Mount, Bi-Directional Aisle Way View, High Bay Occupancy Sensor (Sensor Switch CMB 50)	289.54	25.42
26 09 23 00-0625	EA	Single Pole, Line Voltage, Passive Infrared, Surface Mount, Bi-Directional Aisle Way View, High Bay Occupancy Sensor (Sensor Switch HMR 50)	354.33	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0626	EA	Single Pole, Line Voltage, Passive Infrared, Recessed Mount, Bi-Directional Aisle Way View, High Bay Occupancy Sensor (Sensor Switch RMR 50)	354.33	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0627	EA	Single Pole, Line Voltage, Passive Infrared, Fixture (Box) Mount, Bi-Directional Aisle Way View, High Bay Occupancy Sensor (Sensor Switch CMRB 50)	354.33	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0628	EA	2-Pole, Line Voltage, Recessed Mount, Passive Infrared, Bi-Directional Aisle Way View, High Bay Occupancy Sensor (Sensor Switch RMR 50 2P)	310.00	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0629	EA	2-Pole, Line Voltage, Passive Infrared, Fixture (Box) Mount, Bi-Directional Aisle Way View, High Bay Occupancy Sensor (Sensor Switch CMRB 50 2P)	310.00	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0630	EA	208/240 Volt AC, Line Voltage, Passive Infrared, Recessed Mount, Bi-Directional Aisle Way View, High Bay Occupancy Sensor (Sensor Switch RMR 50 208)	258.85	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0631	EA	208/240 Volt AC, Line Voltage, Passive Infrared, Fixture (Box) Mount, Bi-Directional Aisle Way View, High Bay Occupancy Sensor (Sensor Switch CMRB 50 208)	258.85	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0632	EA	480 Volt AC, Line Voltage, Passive Infrared, Recessed Mount, Bi-Directional Aisle Way View, High Bay Occupancy Sensor (Sensor Switch RMR 50 480)	258.85	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0633	EA	480 Volt AC, Line Voltage, Passive Infrared, Fixture (Box) Mount, Bi-Directional Aisle Way View, High Bay Occupancy Sensor (Sensor Switch CMRB 50 480)	258.85	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0634	EA	Low Voltage, Passive Infrared, Surface Mount, End Of Aisle Way View, High Bay Occupancy Sensor (Sensor Switch HM 10)	289.54	25.42
26 09 23 00-0635	EA	Low Voltage, Passive Infrared, Fixture (Box) Mount, End Of Aisle Way View, High Bay Occupancy Sensor (Sensor Switch HMB 10)	289.54	25.42
26 09 23 00-0636	EA	Single Pole, Line Voltage, Passive Infrared, Surface Mount, End Of Aisle Way View, High Bay Occupancy Sensor (Sensor Switch HMR 10)	354.33	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0637	EA	Single Pole, Line Voltage, Passive Infrared, Fixture (Box) Mount, End Of Aisle Way View, High Bay Occupancy Sensor (Sensor Switch HMRB 10)	354.33	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 09 23 00-0638	EA	2-Pole, Line Voltage, Passive Infrared, Fixture (Box) Mount, End Of Aisle Way View, High Bay Occupancy Sensor (Sensor Switch HMRB 10 2P)	340.69	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0639	EA	480 Volt AC, Line Voltage, Passive Infrared, Fixture (Box) Mount, End Of Aisle Way View, High Bay Occupancy Sensor (Sensor Switch HMRB 10 480)	306.59	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0640	EA	208/240 Volt AC, Line Voltage, Passive Infrared, Fixture (Box) Mount, End Of Aisle Way View, High Bay Occupancy Sensor (Sensor Switch HMRB 10 208)	306.59	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0641		**Occupancy Sensor Power Packs (Sensor Switch)** *(26 09 23 00-0530)*		
26 09 23 00-0642	EA	Single Pole, 20 Amperes, 120/277 Volt AC, Occupancy Sensor Power Pack With Relay Circuit Protection (Sensor Switch PP20)	140.68	22.60
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.56*	
26 09 23 00-0643	EA	2-Pole, 20 Amperes, 120/277 Volt AC, Occupancy Sensor Power Pack With Relay Circuit Protection (Sensor Switch PP20 2P)	208.87	22.60
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.56*	
26 09 23 00-0644	EA	Single Pole, 20 Amperes, 120/277 Volt AC, Occupancy Sensor Power Pack Without Relay Circuit Protection (Sensor Switch MP20)	106.58	22.60
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.56*	
26 09 23 00-0645	EA	2-Pole, 20 Amperes, 120/277 Volt AC, Occupancy Sensor Slave Pack Without Relay Circuit Protection (Sensor Switch MSP20)	96.35	22.60
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.56*	
26 09 23 00-0646	EA	20 Amperes, 120/277 Volt AC, Occupancy Sensor Slave Pack (Sensor Switch SP20)	130.45	22.60
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.56*	
26 09 23 00-0647	EA	120/277 Volt AC, High Intensity Discharge (HID) Power Pack With 20 Minute Start To High Override (Sensor Switch PP20 SH)	215.69	22.60
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.56*	
26 09 23 00-0648	EA	120/277 Volt AC, 2-Pole, Power Pack With Alternating Relays (Sensor Switch PP 2PAR)	215.69	22.60
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.56*	
26 09 23 00-0649	EA	120/277 Volt AC, Power Pack With Momentary Contacts For Latching Contactors Or Relays (Sensor Switch PP 2PM)	215.69	22.60
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.56*	
26 09 23 00-0650		**Daylighting Control (Sensor Switch)** *(26 09 23 00-0530)*		
26 09 23 00-0651	EA	Low Voltage, Ceiling Mount, On-Off Switching Photocell (Sensor Switch CM PC)	221.34	25.42
26 09 23 00-0652	EA	Low Voltage, Recessed Mount, On-Off Switching Photocell (Sensor Switch RM PC)	221.34	25.42
26 09 23 00-0653	EA	Low Voltage, Fixture (Box) Mount, On-Off Switching Photocell (Sensor Switch CMB PC)	221.34	25.42
26 09 23 00-0654	EA	Line Voltage, Ceiling Mount, On-Off Switching Photocell (Sensor Switch CMR PC)	221.34	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0655	EA	Line Voltage, Recessed Mount, On-Off Switching Photocell (Sensor Switch RMR PC)	221.34	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0656	EA	Line Voltage, Fixture (Box) Mount, On-Off Switching Photocell (Sensor Switch CMRB PC)	221.34	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0657	EA	Low Voltage, Ceiling Mount, Automatic Dimming Control Photocell (Sensor Switch CM ADC)	221.34	25.42
26 09 23 00-0658	EA	Low Voltage, Recessed Mount, Automatic Dimming Control Photocell (Sensor Switch RM ADC)	221.34	25.42
26 09 23 00-0659	EA	Low Voltage, Fixture (Box) Mount, Automatic Dimming Control Photocell (Sensor Switch CMB ADC)	221.34	25.42
26 09 23 00-0660	EA	Line Voltage, Ceiling Mount, Automatic Dimming Control Photocell (Sensor Switch CMR ADC)	221.34	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0661	EA	Line Voltage, Recessed Mount, Automatic Dimming Control Photocell (Sensor Switch RMR ADC)	221.34	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0662	EA	Line Voltage, Fixture (Box) Mount, Automatic Dimming Control Photocell (Sensor Switch CMRB ADC)	221.34	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0663	EA	Low Voltage, Ceiling Mount, Combination On/Off And Dimming Control Photocell (Sensor Switch CM PC ADC)	323.64	25.42
26 09 23 00-0664	EA	Low Voltage, Recessed Mount, Combination On/Off And Dimming Control Photocell (Sensor Switch RM PC ADC)	323.64	25.42
26 09 23 00-0665	EA	Low Voltage, Fixture (Box) Mount, Combination On/Off And Dimming Control Photocell (Sensor Switch CMB PC ADC)	323.64	25.42
26 09 23 00-0666	EA	Line Voltage, Ceiling Mount, Combination On/Off And Dimming Control Photocell (Sensor Switch CMR PC ADC)	323.64	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0667	EA	Line Voltage, Recessed Mount, Combination On/Off And Dimming Control Photocell (Sensor Switch RMR PC ADC)	323.64	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0668	EA	Line Voltage, Fixture (Box) Mount, Combination On/Off And Dimming Control Photocell (Sensor Switch CMRB PC ADC)	323.64	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 09 23 00-0669		**Occupancy Sensors (Sensor Switch nLight®)** *(26 09 23)*		
		Note: Includes testing of new devices and certification.		
26 09 23 00-0670		**Occupancy Sensors (Sensor Switch nLight®)** *(26 09 23 00-0669)*		
		Note: Excludes boxes.		
26 09 23 00-0671		**Wall Switch Mount Occupancy Sensors (Sensor Switch nLight®)** *(26 09 23 00-0670)*		
26 09 23 00-0672		**Dual Technology, Wall Switch Mount Occupancy Sensors (Sensor Switch nLight®)** *(26 09 23 00-0671)*		
		Note: Includes passive infrared and microphonics detection		
26 09 23 00-0673	EA	Low Voltage, Dual Technology, Wall Switch Mount Occupancy Sensor With Raise/Lower Dim Control (Sensor Switch nLight® nWSX PDT LV DX)	355.51	11.30

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 09 23 00-0674		360 Degree View Occupancy Sensors (Sensor Switch nLight®) *(26 09 23 00-0670)*		
26 09 23 00-0675		Passive Infrared, 360 Degree View Occupancy Sensors (Sensor Switch nLight®) *(26 09 23 00-0674)*		
		Note: One photocell or dimming option per occupancy sensor		
26 09 23 00-0676	EA	Low Voltage, Passive Infrared, Ceiling Mount, Standard Range, 360 Degree View Occupancy Sensor (Sensor Switch nLight® nCM 9)	416.68	25.42
26 09 23 00-0677	EA	Low Voltage, Passive Infrared, Ceiling Mount, Extended Range, 360 Degree View Occupancy Sensor (Sensor Switch nLight® nCM 10)	416.68	25.42
26 09 23 00-0678	EA	Low Voltage, Passive Infrared, Ceiling Mount, Extended Range, 360 Degree View Occupancy Sensor With Auto Dimming Control Photocell (Sensor Switch nLight® nCM 10 ADC)	416.68	25.42
26 09 23 00-0679		Dual Technology, 360 Degree View Occupancy Sensors (Sensor Switch nLight®) *(26 09 23 00-0674)*		
		Note: One photocell or dimming option per occupancy sensor. Includes passive infrared and microphonics detection		
26 09 23 00-0680	EA	Low Voltage, Dual Technology, Ceiling Mount, Standard Range, 360 Degree View Occupancy Sensor (Sensor Switch nLight® nCM PDT 9)	489.84	25.42
26 09 23 00-0681	EA	Low Voltage, Dual Technology, Ceiling Mount, Extended Range, 360 Degree View Occupancy Sensor (Sensor Switch nLight® nCM PDT 10)	489.84	25.42
26 09 23 00-0682	EA	2-Channel, Low Voltage, Dual Technology, Ceiling Mount, Extended Range, 360 Degree View Occupancy Sensor (Sensor Switch nLight® nCM PDT 10 2P)	508.10	25.42
26 09 23 00-0683		Wide View And Hallway Occupancy Sensors (Sensor Switch nLight®) *(26 09 23 00-0670)*		
26 09 23 00-0684		Dual Technology, Wide View And Hallway Occupancy Sensors (Sensor Switch nLight®) *(26 09 23 00-0683)*		
		Note: Includes passive infrared and microphonics detection		
26 09 23 00-0685	EA	Low Voltage, Dual Technology, Corner/Ceiling Mount, Wide View Occupancy Sensor (Sensor Switch nLight® nWV PDT 16)	489.84	25.42
26 09 23 00-0686		High Bay Occupancy Sensors (Sensor Switch nLight®) *(26 09 23 00-0670)*		
26 09 23 00-0687		Passive Infrared, High Bay Occupancy Sensors (Sensor Switch nLight®) *(26 09 23 00-0686)*		
26 09 23 00-0688	EA	Low Voltage, Passive Infrared, Fixture (Box) Mount, 360 Degree View, High Bay Occupancy Sensor (Sensor Switch nLight® nCMB 6)	416.68	25.42
26 09 23 00-0689		Occupancy Sensor Power Packs (Sensor Switch nLight®) *(26 09 23 00-0669)*		
26 09 23 00-0690	EA	150mA At 15 Volt DC Output, 120-277 Volt AC Input, Standard Power Supply (Sensor Switch nLight® PS-150)	136.65	22.60
26 09 23 00-0691	EA	250mA At 15 Volt DC Output, 120-277 Volt AC Input, Standard Power Supply (Sensor Switch nLight® PS-250)	173.27	22.60
26 09 23 00-0692	EA	30mA/Port At 15 Volt DC Output, 120-277 Volt AC Input, Dimming Power Pack (Sensor Switch nLight® nEPP5 D KO)	235.43	22.60
26 09 23 00-0693	EA	System Power Pack and Relay, Switching Module (Sensor Switch nLight® nPP 16)	235.43	22.60
26 09 23 00-0694		Occupancy Sensor Accessories (Sensor Switch nLight®) *(26 09 23 00-0669)*		
26 09 23 00-0695	EA	RS232 AV Integrator (Sensor Switch nLight® nIO X)	508.10	25.42
26 09 23 00-0696	EA	8 Port, Aggregation Bridge With Power Supply (Sensor Switch nLight® nBRG 8 KIT)	407.29	25.42
26 09 23 00-0697		Daylighting Controls (Sensor Switch nLight®) *(26 09 23 00-0669)*		
26 09 23 00-0698	EA	Low Voltage, Ceiling Mount, Automatic Dimming Control Photocell (Sensor Switch nLight® nCM ADC)	343.51	25.42
26 09 23 00-0699		Controls (Sensor Switch nLight®) *(26 09 23 00-0669)*		
26 09 23 00-0700	EA	On/Off And Raise/Lower Control, Push Button Digital Wall Switch, WallPod® Station (Sensor Switch nLight® nPODM DX)	222.79	25.42
26 09 23 00-0701	EA	1 Scene Controller (2 Buttons), Push Button Digital Wall Switch, WallPod® Station (Sensor Switch nLight® nPODM 1SB)	325.25	25.42
26 09 23 00-0702	EA	On/Off Push Button Digital Wall Switch, WallPod® Station (Sensor Switch nLight® nPODM)	764.22	25.42
26 09 23 00-0703	EA	3-1/2" Screen, High Resolution Touch Screen Controller, WallPod® Station (Sensor Switch nLight® nPOD GFX)	764.22	25.42
26 09 23 00-0704	EA	3-1/2" Screen, Touch Screen Clock And Network Interface Controller, Gateway (Sensor Switch nLight® nGWY2)	2,886.01	25.42
26 09 23 00-0705		Occupancy Sensors (Lutron) *(26 09 23)*		
		Note: Includes testing of new devices and certification.		
26 09 23 00-0706		Wireless Occupancy Sensors *(26 09 23 00-0705)*		
26 09 23 00-0707	EA	Wireless, Passive Infrared, Ceiling Mount, 360 Degree View Occupancy/Vacancy Sensor (Lutron® LRF2-OCR2B-P-WH)	163.41	25.42
26 09 23 00-0708	EA	Wireless, Passive Infrared, Ceiling Mount, 360 Degree View Vacancy Sensor (Lutron® LRF2-VCR2B-P-WH)	170.97	25.42
26 09 23 00-0709	EA	Wireless, Passive Infrared, Hallway Wall Mount, Occupancy/Vacancy Sensor (Lutron® LRF2-OHLB-P-WH)	165.21	25.42
26 09 23 00-0710	EA	Wireless, Passive Infrared, Hallway Wall Mount, Vacancy Sensor (Lutron® LRF2-VHLB-P-WH)	175.21	25.42
26 09 23 00-0711	EA	Wireless, Passive Infrared, 90 Degree Corner Mount, Occupancy/Vacancy Sensor (Lutron® LRF2-OKLB-P-WH)	167.45	25.42
26 09 23 00-0712	EA	Wireless, Passive Infrared, 90 Degree Corner Mount, Vacancy Sensor (Lutron® LRF2-VKLB-P-WH)	175.21	25.42
26 09 23 00-0713	EA	Wireless, Passive Infrared, 180 Degree Wall Mount, Occupancy/Vacancy Sensor (Lutron® LRF2-OWLB-P-WH)	163.41	25.42

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 09 23 00-0714	EA	Wireless, Passive Infrared, 180 Degree Wall Mount, Vacancy Sensor (Lutron® LRF2-VWLB-P-WH)	167.45	25.42
26 09 23 00-0715	EA	Wireless, Passive Infrared, Ceiling Mount, 360 Degree View, High Bay Occupancy Sensor (Lutron® FHB140NP24V)	165.21	25.42
26 09 23 00-0716	EA	Wireless, Dual Technology, Ceiling Mount, 500 SF Coverage, 180 Degree View Occupancy Sensor (Lutron® LOS-CDT-500-WH)	259.40	25.42
26 09 23 00-0717	EA	Wireless, Dual Technology, Ceiling Mount, 500 SF Coverage, 180 Degree View Occupancy Sensor With Relay (Lutron® LOS-CDT-500R-WH)	277.34	25.42
26 09 23 00-0718	EA	Wireless, Dual Technology, Ceiling Mount, 1,000 SF Coverage, 180 Degree View Occupancy Sensor (Lutron® LOS-CDT-1000-WH)	317.71	25.42
26 09 23 00-0719	EA	Wireless, Dual Technology, Ceiling Mount, 1,000 SF Coverage, 180 Degree View Occupancy Sensor With Relay (Lutron® LOS-CDT-1000R-WH)	335.65	25.42
26 09 23 00-0720	EA	Wireless, Dual Technology, Ceiling Mount, 2,000 SF Coverage, 360 Degree View Occupancy Sensor (Lutron® LOS-CDT-2000-WH)	344.62	25.42
26 09 23 00-0721	EA	Wireless, Dual Technology, Ceiling Mount, 2,000 SF Coverage, 360 Degree View Occupancy Sensor With Relay (Lutron® LOS-CDT-2000R-WH)	362.56	25.42
26 09 23 00-0722	EA	Wireless, Passive Infrared, Ceiling Mount, 450 SF Coverage, 360 Degree View Occupancy Sensor (Lutron® LOS-CIR-450-WH)	202.88	25.42
26 09 23 00-0723	EA	Wireless, Passive Infrared, Ceiling Mount, 1,000 SF Coverage, 360 Degree View Occupancy Sensor (Lutron® LOS-CIR-1500-WH)	214.54	25.42
26 09 23 00-0724	EA	Wireless, Ultrasonic, Ceiling Mount, 500 SF Coverage, 180 Degree View Occupancy Sensor (Lutron® LOS-CUS-500-WH)	252.67	25.42
26 09 23 00-0725	EA	Wireless, Ultrasonic, Ceiling Mount, 1,000 SF Coverage, 180 Degree View Occupancy Sensor (Lutron® LOS-CUS-1000-WH)	281.83	25.42
26 09 23 00-0726	EA	Wireless, Ultrasonic, Ceiling Mount, 2,000 SF Coverage, 360 Degree View Occupancy Sensor (Lutron® LOS-CUS-2000-WH)	304.25	25.42
26 09 23 00-0727	EA	Wireless, Passive Infrared, 1,600 SF Coverage, 110 Degree Wall Mount, Occupancy Sensor (Lutron® LOS-WIR-WH)	261.64	25.42
26 09 23 00-0728	EA	Wireless, Passive Infrared, RF Daylight Sensor (Lutron® LRF2-DCRB-WH)	239.86	25.42
26 09 23 00-0729	EA	Wireless, Dual Technology, Wall Mount, 1,000 SF Coverage, 180 Degree View Occupancy Sensor (Lutron® LOS-SIR-HD-WH)	199.33	25.42
26 09 23 00-0730	EA	Wireless, Dual Technology, Wall Mount, 1,000 SF Coverage, 180 Degree View Occupancy Sensor, Dual Circuit (Lutron® LOS-S2IR-HD-WH)	247.12	25.42
26 09 23 00-0731	EA	Wireless, Switch and Ceiling Retrofit Sensor (Lutron® MRF2-1S8A-10C)	301.71	25.42
26 09 23 00-0732	EA	Wireless, Switch and Hallway Retrofit Sensor (Lutron® MRF2-1S8A-10H)	320.70	25.42
26 09 23 00-0733	EA	Wireless, Switch and Corner Retrofit Sensor (Lutron® MRF2-1S8A-10K)	320.70	25.42
26 09 23 00-0734	EA	Wireless, Switch and Wall Retrofit Sensor (Lutron® MRF2-1S8A-10W)	320.70	25.42
26 09 23 00-0735	EA	Wireless, Switch and Vacancy Retrofit Sensor (Lutron® MRF2-1S8A-10V)	338.11	25.42
26 09 23 00-0736	EA	Wireless, Two Switchs and Wall Retrofit Sensor (Lutron® MRF2-2S8A-10W)	549.85	36.72

26 09 23 00-0737 Nodes And Modules *(26 09 23 00-0705)*

26 09 23 00-0738	EA	0 Wired Inputs, Ceiling Mount, QS Sensor Module (Lutron® QSM2-XW-C)	270.61	25.42
26 09 23 00-0739	EA	0 Wired Inputs, Junction Box Ceiling Mount, QS Sensor Module (Lutron® QSM2-XW-J)	270.61	25.42
26 09 23 00-0740	EA	4 Wired Inputs, Ceiling Mount, QS Sensor Module (Lutron® QSM2-4W-C)	344.62	25.42
26 09 23 00-0741	EA	4 Wired Inputs, Junction Box Ceiling Mount, QS Sensor Module (Lutron® QSM2-4W-J)	344.62	25.42
26 09 23 00-0742	EA	120 Volt, Gang Box Mount, 3-Wire Fluorescent Power Module (Lutron® PHPM-3F-120-WH)	442.22	28.25
26 09 23 00-0743	EA	120 Volt, Gang Box Mount, Switching Power Module (Lutron® PHPM-SW-DV-WH)	442.22	28.25
26 09 23 00-0744	EA	120 Volt, Gang Box Mount, Phase Adaptive Power Module (Lutron® PHPM-PA-120-WH)	538.66	28.25
26 09 23 00-0745	EA	120 Volt, Gang Box Mount, Phase Adaptive Power Module With 3-Wire Fluorescent Input (Lutron® PHPM-WBX-120-WH)	552.11	28.25
26 09 23 00-0746	EA	120/277 Volt, Gang Box Mount, 3-Wire Fluorescent Power Module (Lutron® PHPM-3F-DV-WH)	684.43	28.25
26 09 23 00-0747	EA	120/277 Volt, Gang Box Mount, Phase Adaptive Power Module (Lutron® PHPM-PA-DV-WH)	727.04	28.25
26 09 23 00-0748	EA	120/277 Volt, Gang Box Mount, Phase Adaptive Power Module With 3-Wire Fluorescent Input (Lutron® PHPM-WBX-DV-WH)	769.65	28.25
26 09 23 00-0749	EA	1 Circuit, Surface Mount, HP Hi-Power Dimming Module System (Lutron® HP-2)	2,092.01	45.20
26 09 23 00-0750	EA	2 Circuits, Surface Mount, HP Hi-Power Dimming Module System (Lutron® HP-4)	2,052.84	50.85
26 09 23 00-0751	EA	3 Circuits, Surface Mount, HP Hi-Power Dimming Module System (Lutron® HP-6)	3,017.29	56.50

26 09 23 00-0752 Other Accessories *(26 09 23 00-0705)*

26 09 23 00-0753	EA	Pico® Wireless Control Wallplate Adapter (Lutron® PJ)	39.64	
26 09 23 00-0754	EA	Pico® Wireless Control (Lutron® PJ)	56.62	
26 09 23 00-0755	EA	4-Scene Wireless Remote Control (Lutron® GRX-IT-WH)	168.27	
26 09 23 00-0756	EA	8-Scene Wireless Remote Control (Lutron® GRX-8IT-WH)	323.01	
26 09 23 00-0757	EA	4 Button, EcoSystem® Wall Control With Raise/Lower (Lutron® CC-4BRL)	331.68	25.42
26 09 23 00-0758	EA	seeTouch® QS Wallstation (Lutron® QSWS2)	422.58	25.42
26 09 23 00-0759	EA	seeTouch® QS Wallstation With Infrared Receiver (Lutron® QSWS2)	422.58	25.42
26 09 23 00-0760	EA	120/277 Volt, Energi Savr Node™ With Softswitch®, Fixture Controller (Lutron® QSN-4S16-S)	697.89	28.25
26 09 23 00-0761	EA	120/277 Volt, Energi Savr Node™ For 0-10 V Models, Fixture Controller (Lutron® QSN-4T16-S)	960.28	28.25
26 09 23 00-0762	EA	Control Interface (Lutron® QSE-CI-NWK-E)	1,158.72	25.42
26 09 23 00-0763	EA	1 EcoSystem® Digital Link, Energi Savr Node™, Digital Fixture Controller (Lutron® QSN-1ECO-S)	1,149.77	25.42
26 09 23 00-0764	EA	2 EcoSystem® Digital Links, Energi Savr Node™, Digital Fixture Controller (Lutron® QSN-2ECO-S)	1,542.24	25.42
26 09 23 00-0765	MLF	5 Conductor, Non-Plenum, Low Voltage Grafik Eye Cable (Lutron® GRX-CBL-346S)	2,252.00	789.61
26 09 23 00-0766	MLF	5 Conductor, Plenum Rated, Low Voltage Grafik Eye Cable (Lutron® GRX-PCBL-346S)	3,149.07	789.61

26 09 23 00-0767 Wired Occupancy Sensors *(26 09 23 00-0705)*

26 09 23 00-0768	EA	120 Volt, Dimmer With Occupancy Sensor (Lutron® MS-OP600M)	128.33	28.25
26 09 23 00-0769	EA	120 Volt, Eco-dim Dimmer With Occupancy Sensor (Lutron® MS-OP600GHW)	135.29	28.25
26 09 23 00-0770	EA	120 Volt, Dimmer With Vacancy Sensor (Lutron® MS-VP600M)	128.33	28.25
26 09 23 00-0771	EA	120 Volt, Eco-dim Dimmer With Vacancy Sensor (Lutron® MS-VP600GHW)	135.29	28.25
26 09 23 00-0772	EA	120 Volt, Occupancy Sensor Switch (Lutron® MS-OPS2)	94.94	28.25

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 09 23 00-0773	EA	120 Volt, 3-Way Occupancy Sensor Switch (Lutron® MS-OPS5M)	114.59	28.25
26 09 23 00-0774	EA	120 Volt, 3-Way Occupancy Sensor With Dual Voltage Switch (Lutron® MS-OPS6M2-DV)	164.77	28.25
26 09 23 00-0775	EA	120 Volt, 3-Way Occupancy Sensor With Dual Voltage Switch (Lutron® MS-OPS6M2N-DV)	144.09	28.25
26 09 23 00-0776	EA	120 Volt, Vacancy Sensor Switch (Lutron® MS-VPS2)	92.30	28.25
26 09 23 00-0777	EA	120 Volt, 3-Way Vacancy Sensor Switch (Lutron® MS-VPS5M)	114.59	28.25
26 09 23 00-0778	EA	120 Volt, 3-Way Vacancy Sensor With Dual Voltage Switch (Lutron® MS-VPS6M2-DV)	157.05	28.25
26 09 23 00-0779	EA	120 Volt, 3-Way Vacancy Sensor With Dual Voltage Switch (Lutron® MS-VPS6M2N-DV)	130.79	28.25
26 09 23 00-0780	EA	120 Volt, Multi-Location, Single-Pole, Passive Infrared, Wall Switch Mount Occupancy/Vacancy Sensor With Dimmer (Lutron® Maestro® MSCL-OP153M)	142.16	28.25
26 09 23 00-0781	EA	120 Volt, Multi-Location, Single-Pole, Passive Infrared, Wall Switch Mount Vacancy Sensor With Dimmer (Lutron® Maestro® MSCL-VP153M)	151.67	28.25

26 09 23 00-0782 Lighting Controls (Daintree Networks) *(26 09 23)*

Note: Includes testing of new devices and certification.

26 09 23 00-0783 Wireless Sensors *(26 09 23 00-0782)*

26 09 23 00-0784	EA	Battery Powered, Passive Infrared, Ceiling Mount, 500 SF Coverage, 360 Degree View, Wireless Occupancy Sensor (Daintree Networks WOS2-CM-S)	197.18	25.42
26 09 23 00-0785	EA	Battery Powered, Passive Infrared, Ceiling Mount, 1,000 SF Coverage, 360 Degree View, Wireless Occupancy Sensor (Daintree Networks WOS2-CM-E)	197.18	25.42
26 09 23 00-0786	EA	Battery Powered, Passive Infrared, Wall Mount, Long-Range Lens, Wireless Occupancy Sensor (Daintree Networks WOS2-WM-L) Note: 8' to 12' install height.	197.18	25.42
26 09 23 00-0787	EA	Battery Powered, Passive Infrared, Wall Mount, Wide-Angle Lens, Wireless Occupancy Sensor (Daintree Networks WOS2-WM-W) Note: 8' to 12' install height.	197.18	25.42
26 09 23 00-0788	EA	Battery Powered, Wireless Photosensor (Daintree Networks WPS1) Note: 8' to 12' install height.	167.91	25.42

26 09 23 00-0789 Wireless Adaptors *(26 09 23 00-0782)*

26 09 23 00-0790	EA	Line Voltage, Wireless Adapter (Daintree Networks WA100) Note: Includes on/off, 0-10V dimming and alternate/bi-level switching. Includes inputs for occupancy controller and photo sensor, and mounting bracket.	228.76	33.90
26 09 23 00-0791	EA	Line Voltage, Wireless Adapter With Power Monitoring (Daintree Networks WA100-PM) Note: Includes on/off, 0-10V dimming and alternate/bi-level switching. Includes inputs for occupancy controller and photo sensor, power monitoring, and mounting bracket.	258.03	33.90
26 09 23 00-0792	EA	Line Voltage, Wireless Fixture Adapter (Daintree Networks WFA100) Note: Includes on/off and 0-10V dimming.	176.08	33.90
26 09 23 00-0793	EA	Line Voltage, Wireless Fixture Adapter With Sensor Inputs (Daintree Networks WFA100-SN) Note: Includes on/off and 0-10V dimming. Includes inputs for occupancy controller and photo sensor.	190.72	33.90
26 09 23 00-0794	EA	Line Voltage, Wireless General Purpose Adapter (Daintree Networks WGA100) Note: Includes mounting bracket.	287.30	33.90

26 09 23 00-0795 Controllers *(26 09 23 00-0782)*

Note: Includes programming for new controllers.

26 09 23 00-0796	EA	Site System Controller (Daintree Networks SC51) Note: For single facility up to 1,000 wireless nodes. Excludes node licenses. Does not support CS-MFM.	3,010.35	56.50
26 09 23 00-0797	EA	Enterprise System Controller (Daintree Networks SC71) Note: For single or multiple facilities up to 10,000 wireless nodes. Excludes node licenses. Up to 4,000 zones per facility. Single facility included, additional facilities require purchase of CS-MFM per facility. Includes rack rails.	5,058.98	56.50
26 09 23 00-0798	EA	Wireless Area Controller (Daintree Networks WAC50) Note: Maximum capacity of 100 wireless nodes. Excludes node licenses.	1,197.88	
26 09 23 00-0799	EA	BACnet Server (Daintree Networks CS-BAC) Note: Requires purchase of additional CS-BAC-5 licenses for systems with more than 1,000 nodes.	5,936.96	56.50

26 09 23 00-0800 Other Accessories *(26 09 23 00-0782)*

26 09 23 00-0801	EA	10 To 30 Volt AC, Wireless Thermostat (Daintree Networks WTS10)	464.19	56.50
26 09 23 00-0802	EA	Battery Powered, Wireless Wall Dimmer (Daintree Networks WWD1)	199.50	33.90
26 09 23 00-0803	EA	SafePlug Model 1203 Wireless Plug Load Controller, Dual Receptacle (Daintree Networks RSP-1203) Note: ControlScope interoperable version is 9916 003 ZB HA or later.	315.26	11.30
26 09 23 00-0804	EA	SafePlug 1621 Reset Link Key (Daintree Networks RSP-1621) Note: Required to reset a Safeplug 1203 to default settings.	20.49	

26 09 23 00-0805 Software And Support *(26 09 23 00-0782)*

26 09 23 00-0806	EA	Regular Node License Bundle (25 Regular Wireless Nodes) (Daintree Networks N25) Note: Includes 1 year of SUS.	2,019.36	
26 09 23 00-0807	EA	Software Updates and Support - 1 Year Extension (5 Wireless Nodes) (Daintree Networks SUS1-5) Note: Node total must match the number of wireless node licenses purchased or installed on the system.	131.70	
26 09 23 00-0808	EA	Software Updates and Support - 3 Year Extension (5 Wireless Nodes) (Daintree Networks SUS3-5) Note: Node total must match the number of wireless node licenses purchased or installed on the system.	321.93	
26 09 23 00-0809	EA	Thermostat Node License Bundle (5 Thermostat Wireless Nodes) (Daintree Networks T5) Note: Includes 1 year of SUS.	1,726.70	
26 09 23 00-0810	EA	BACnet Supplemental Node License Bundle (5 Additional Wireless Nodes) (Daintree Networks CS-BAC-5) Note: Requires CS-BAC; Supports additional wireless nodes above 1,000. Node total must match the number of wireless node licenses purchased or installed on the system.	29.27	
26 09 23 00-0811	EA	Multi-Facility Management (per additional facility) (Daintree Networks CS-MFM) Note: Requires SC71.	1,141.38	
26 09 23 00-0812	HR	Engineering Assistance (Daintree Networks EAH1)	438.99	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 09 23 00-0813	DAY	Engineering Assistance (Daintree Networks EA1)	3,511.94	
26 09 23 00-0814	EA	2-Year Hardware Warranty Extension (Daintree Networks HWE2-SC51) Note: Extends total hardware warranty to 3 years. Can be purchased before expiry of the included 1-year warranty.	936.52	
26 09 23 00-0815	EA	2-Year Hardware Warranty Extension (Daintree Networks HWE2-SC71) Note: Extends total hardware warranty to 3 years. Can be purchased before expiry of the included 1-year warranty.	1,726.70	
26 09 23 00-0816		**Fixture Mounted Occupancy Sensors (Leviton)** *(26 09 23)* Note: Includes testing of new devices and certification.		
26 09 23 00-0817	EA	120-347 Volt, Passive Infrared, Fixture Mount, 360 Degree View, High Bay Occupancy Sensor (Leviton® OSFHU-ITW)	156.23	25.42
26 09 23 00-0818	EA	480 Volt, Passive Infrared, Fixture Mount, 360 Degree View, High Bay Occupancy Sensor (Leviton® OSFHU-I4W)	135.60	25.42
26 09 23 00-0819	EA	120-347 Volt, Passive Infrared, Fixture Mount, 360 Degree View, Cold Storage Occupancy Sensor (Leviton® OSFHU-CTW)	173.28	25.42
26 09 23 00-0820	EA	480 Volt, Passive Infrared, Fixture Mount, 360 Degree View, Cold Storage Occupancy Sensor (Leviton® OSFHU-C4W)	135.60	25.42
26 09 23 00-0821	EA	120-347 Volt, Dual Detection Occupancy Wall Sensor Switch (Lithonia WSX-PDT)	236.38	11.28
26 09 23 00-0822		**Wireless Enabled Communication Devices For Streetlights** *(26 09 23)* Note: Includes testing of new devices and certification.		
26 09 23 00-0823		**Wireless Enabled Communication Nodes For Streetlights (Roam®)** *(26 09 23 00-0822)*		
26 09 23 00-0824	EA	120/244/277 Voltage, Wireless Enabled Communication Node For Streetlights (Roam® REN127 NM1)	361.52	
26 09 23 00-0825	EA	480 Voltage, Wireless Enabled Communication Node For Streetlights (Roam® REN480 NM1)	507.85	
26 09 23 00-0826		**Wireless Enabled Communication Devices For Streetlights (Roam®)** *(26 09 23 00-0822)*		
26 09 23 00-0827	EA	Retrofit Receptacle Kit (Roam® DUR103) Note: For adapting light fixtures for use with a NEMA locking type photocontrol.	57.90	
26 09 23 00-0828	EA	Wireless Enabled Backbone And Data Backhaul Device, Gateway (Roam® REG127)	14,762.10	64.51
26 09 23 00-0829		**RF Wireless Technology, Switches And Dimmers (Lutron® Maestro Wireless®)** *(26 09 23)*		
26 09 23 00-0830		**RF Wireless Technology, Switches (Lutron® Maestro Wireless®)** *(26 09 23 00-0829)*		
26 09 23 00-0831	EA	6 Amperes Lighting, 3 Amperes Fan, RF Wireless Technology, Electronic Switch (Lutron® Maestro Wireless® MRF2-6ANS)	139.36	22.60
26 09 23 00-0832	EA	8 Amperes Lighting, 5.8 Amperes Fan, RF Wireless Technology, Spec Grade Electronic Switch (Lutron® Maestro Wireless® MRF2-8ANS-120)	165.41	22.60
26 09 23 00-0833	EA	8 Amperes Lighting, 3 Amperes Fan, RF Wireless Technology, Spec Grade Electronic Switch (Lutron® Maestro Wireless® MRF2-8S-DV)	262.49	22.60
26 09 23 00-0834	EA	120 Volt, Claro® Gloss Finish, RF Wireless Technology, Companion Switch (Lutron® Maestro Wireless® MA-AS)	95.91	22.60
26 09 23 00-0835	EA	277 Volt, Claro® Gloss Finish, RF Wireless Technology, Companion Switch (Lutron® Maestro Wireless® MA-AS-277)	118.66	22.60
26 09 23 00-0836	EA	120 Volt, Satin Colors® Satin Finish, RF Wireless Technology, Companion Switch (Lutron® Maestro Wireless® MSC-AS)	105.46	22.60
26 09 23 00-0837	EA	277 Volt, Satin Colors® Satin Finish, RF Wireless Technology, Companion Switch (Lutron® Maestro Wireless® MSC-AS-277)	128.68	22.60
26 09 23 00-0838		**RF Wireless Technology, Dimmers (Lutron® Maestro Wireless®)** *(26 09 23 00-0829)*		
26 09 23 00-0839	EA	600 Watt, 120 Volt, RF Wireless Technology, Incandescent Dimmer (Lutron® Maestro Wireless® MRF2-600M)	133.35	22.60
26 09 23 00-0840	EA	600 Watt, 120 Volt, RF Wireless Technology, Magnetic Low Voltage Dimmer (Lutron® Maestro Wireless® MRF2-6MLV)	145.37	22.60
26 09 23 00-0841	EA	600 Watt, 120 Volt, RF Wireless Technology, Spec Grade Neutral Wire Dimmer (Lutron® Maestro Wireless® MRF2-6ND-120)	175.43	22.60
26 09 23 00-0842	EA	1,000 Watt, 120 Volt, RF Wireless Technology, Spec Grade Dimmer (Lutron® Maestro Wireless® MRF2-10D-120)	186.73	28.25
26 09 23 00-0843	EA	600 Watt, 120 Volt, RF Wireless Technology, Electronic Low-Voltage Dimmer (Lutron® Maestro Wireless® MRF2-6ELV-120)	234.53	22.60
26 09 23 00-0844	EA	120 Volt, Claro® Gloss Finish, RF Wireless Technology, Companion Dimmer (Lutron® Maestro Wireless® MA-R)	72.75	22.60
26 09 23 00-0845	EA	277 Volt, Claro® Gloss Finish, RF Wireless Technology, Companion Dimmer (Lutron® Maestro Wireless® MA-R-277)	89.28	22.60
26 09 23 00-0846	EA	120 Volt, Satin Colors® Satin Finish, RF Wireless Technology, Companion Dimmer (Lutron® Maestro Wireless® MSC-AD)	78.77	22.60
26 09 23 00-0847	EA	277 Volt, Satin Colors® Satin Finish, RF Wireless Technology, Companion Dimmer (Lutron® Maestro Wireless® MSC-AD-277)	95.29	22.60
26 09 23 00-0848	EA	6 Amperes, 120/277 Volt, RF Wireless Technology, 3-Wire Fluorescent Spec Grade Neutral Wire Dimmer (Lutron® Maestro Wireless® MRF2-F6AN-DV)	259.41	39.55
26 09 23 00-0849		**Counter Mounted Consolets** *(26 09 23)*		
26 09 23 00-0850	EA	20" x 24" Type 12, Oil Tight Consolets, Counter Mounted (Schaefer's SPCL-20C24)	672.95	141.01

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 09 23 00-0851		Lighting Console And Stations *(26 09 23)*		
26 09 23 00-0852	EA	80 Channel, 40 Faders, Lighting Console (ETC ColorSource CS 40)	5,168.63	141.01
		For Lighting Console Dust Cover (ETC ColorSource CS40DC), Add	*113.00*	
		For Lighting Console Case (ETC ColorSourcePart 11866), Add	*1,204.85*	
26 09 23 00-0853	EA	10 Preset, Lighting Control Station (Doug Fleenor PRE10-A2)	3,574.43	84.60
26 09 23 00-0854		Theatre Lighting Console *(26 09 23)*		
26 09 23 00-0855	EA	Theatre Lighting Console (ETC Colorsource 20)	3,688.08	169.20
26 09 23 00-0856		Emergency Lighting Controls *(26 09 23)*		
26 09 23 00-0857		Emergency Lighting Control Units (Watt Stopper ELCU) *(26 09 23 00-0856)*		
		Note: The ELCU monitors a single circuit and can be wired either as a control device, so that emergency lighting follows the control of normal lighting, or as a bypass device to shunt emergency power around a control device when normal power fails. Includes integral push-to-test button and LED indicator for emergency and normal power.		
26 09 23 00-0858	EA	DIN Rail Mount, Emergency Lighting Control/Bypass Shunt Unit (Watt Stopper ELCU-100)	245.83	28.25
26 09 23 00-0859	EA	1/2" Knockout Mount, Emergency Lighting Control/Bypass Shunt Unit (Watt Stopper ELCU-200)	245.83	28.25
26 09 23 00-0860		Emergency Shunt Relays (Lighting Control & Design GR 2001™) *(26 09 23 00-0856)*		
		Note: Normally-closed, electrically-held relay to be wired in parallel with a wall switch. Manually controlled emergency lighting will be automatically shunted on during a power outage. Includes two-gang NEMA 1 junction box, voltage-separating barrier and plaster ring separating normal and emergency power. Excludes wall plate and switch.		
26 09 23 00-0861	EA	1 Emergency Shunt Relay And NEMA 1 Enclosure (Lighting Control & Design GR 2001™)	409.57	39.55
26 09 23 00-0862	EA	2 Emergency Shunt Relays And NEMA 1 Enclosure (Lighting Control & Design GR 2001™)	562.33	45.20
26 09 23 00-0863	EA	2 Emergency Shunt Relays And NEMA 1 Enclosure (Lighting Control & Design GR 2001™ Dual)	762.61	50.85
		Note: Controls normal and emergency lighting from single-pole wall switch.		
26 09 23 00-0864		Photocells *(26 09 23)*		
26 09 23 00-0865	EA	Plug-In Photocell For Lighting Fixtures (Intermac® LC2000)	93.48	
26 09 23 00-0866	EA	Wired Photocell For Lighting Fixtures (Intermac® K4021C)	203.94	
26 09 23 00-0867		Outdoor Lighting Motion Sensors *(26 09 23)*		
26 09 23 00-0868	EA	70' Range, 180 Degree Detection Zone, 8 Amperes, Switching Capacity, Polycarbonate Housing, Outdoor Motion Sensor (Lithonia OMS 1000)	127.50	28.25
26 09 23 00-0869	EA	70' Range, 200 Degree Detection Zone, 10 Amperes, Switching Capacity, Cast Aluminum Housing, Outdoor Motion Sensor (Lithonia OMS 2000)	140.37	28.25
26 09 23 00-0870	EA	30' Range, 360 Degree Detection Zone, Line Voltage, Plastic Housing, IP66 Rated, Outdoor Motion Sensor With Photocell (SensorSwitch SBOR)	618.29	28.25
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.95*	
26 09 23 00-0871		Street Light Controls *(26 09 23)*		
26 09 23 00-0872		Photo Controls *(26 09 23 00-0871)*		
26 09 23 00-0873	EA	Photo Control, 120 Volt As Manufactured By Cooper Lighting #RA1014	95.26	
26 09 23 00-0874	EA	Photo Control, Multi-Tap As Manufactured By Cooper Lighting #RA1016	109.90	
26 09 23 00-0875		Connector Node *(26 09 23 00-0871)*		
26 09 23 00-0876	EA	Outdoor Lighting Connector Node (Philips City Touch LLC7260)	561.93	3.56
26 09 23 00-0877		Occupancy Sensors And Switches *(26 09 23)*		
		Note: Includes testing of new devices and certification.		
26 09 23 00-0878	EA	1-pole dimming nLight Air wireless switch (Acuity rPODBA DX WH G2)	101.74	11.30
26 09 23 00-0879	EA	2-pole dimming nLight Air wireless switch (Acuity rPODBA 2P DX WH G2)	109.98	11.30
26 09 23 00-0880	EA	1-pole non-dimming nLight Air wireless switch (Acuity rPODBA WH G2)	101.74	11.30
26 09 23 00-0881	EA	2-pole non-dimming nLight Air wireless switch (Acuity rPODBA 2P WH G2)	109.98	11.30
26 09 23 00-0882	EA	nLight Air dimming powerpack (Acuity rPP20 DS)	132.68	11.30
26 09 23 00-0883	EA	nLight Air non-dimming powerpack (Acuity rPP20 24V)	108.87	11.30
26 09 23 00-0884	EA	Wired wall-switch occupancy sensor (Sensor Switch WSX PDT WH)	87.09	11.30
26 09 23 00-0885	EA	Wireless battery powered nLight Air ceiling sensor (Acuity rCMSB 7 G2)	166.39	11.30
26 09 23 00-0886	EA	nLight Air non-dimming powerpack (Acuity rPP20 24V DS)	132.68	11.30

26 10 Medium-Voltage Electrical Distribution *(26)*

26 11 Substations *(26 10)*

26 11 13 Primary Unit Substations *(26 11)*

26 11 13 00-0001		"Switchyard" Substation Primary Incoming Section *(26 11 13)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 11 13 00-0002		**Outdoor Oil Circuit Breakers "Switchyard"** *(26 11 13 00-0001)*		
		Note: Type SP 14.4 thru 69 KV 1200 amp. Frame mounted. Standard equipment		
26 11 13 00-0003	EA	14.4 KV, 500 MVA, Outdoor Oil Circuit Breaker Type SP, 1,200 Amperes, "Switchyard" Substation	113,592.60	1,981.77
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1,209.46*	
26 11 13 00-0004	EA	23.0 KV, 750 MVA, Outdoor Oil Circuit Breaker Type SP, 1,200 Amperes, "Switchyard" Substation	139,251.75	2,506.35
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1,511.82*	
26 11 13 00-0005	EA	34.5 KV, 1,500 MVA, Outdoor Oil Circuit Breaker Type SP, 1,200 Amperes, "Switchyard" Substation	158,424.91	2,506.35
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1,511.82*	
26 11 13 00-0006	EA	46 KV, 2,500 MVA, Outdoor Oil Circuit Breaker Type SP, 1,200 Amperes, "Switchyard" Substation	182,591.67	2,506.35
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1,612.61*	
26 11 13 00-0007	EA	69 KV, 3,500 MVA, Outdoor Oil Circuit Breaker Type SP, 1,200 Amperes, "Switchyard" Substation	207,047.49	3,089.22
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1,860.71*	
26 11 13 00-0008		**Accessories For Outdoor Oil Circuit Breakers** *(26 11 13 00-0001)*		
26 11 13 00-0009	EA	Reclosure Relay, Adjustable, 3 Shot, #179	2,805.57	206.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*122.04*	
26 11 13 00-0010	EA	Overcurrent Relay, 1 Phase, #51/51N	741.84	149.43
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*81.39*	
26 11 13 00-0011	EA	Directional Overcurrent Relay, Three-Phase, Device No. 67	1,182.24	149.43
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*101.42*	
26 11 13 00-0012	EA	Voltage Relay, Under Or Over- Voltage, Device No. 27 Or 59, Three-Phase	930.97	149.43
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*81.39*	
26 11 13 00-0013	EA	Differential Relay Package, Complete, Device No. 87	3,481.24	504.95
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*304.90*	
26 11 13 00-0014		**"Switchyard", Substation Transformer Section** *(26 11 13)*		
		Note: Standard NEMA design two winding three phase, 60 Hz. oil filled load tap changer 10% Range		
26 11 13 00-0015		**14.4 KV Nominal Primary** *(26 11 13 00-0014)*		
26 11 13 00-0016	EA	1,000 KVA, 14.4 KV Primary, Substation Switchyard, 2 Winding, 3 Phase, Oil Filled	63,710.48	1,981.77
		For 50 Hz Operation, Add	*7,161.47*	
		For Forced Air-Cooling, Add	*7,161.47*	
		For External Control Panel, Add	*1,790.37*	
		For Internally Mounted Current Transformers And Linear Couplers, Add	*596.79*	
		For Lightning Arrester On 15 kV Transformer Station Type And Mounting, Add	*2,983.95*	
		For Lightning Arrester On 34.5 kV Transformer Station Type And Mounting, Add	*7,459.87*	
		For Lightning Arrester On 69 kV Transformer Station Type And Mounting, Add	*8,951.84*	
26 11 13 00-0017	EA	2,000 KVA, 14.4 KV Primary, Substation Switchyard, 2 Winding, 3 Phase, Oil Filled	72,414.44	2,483.03
		For 50 Hz Operation, Add	*8,085.00*	
		For Forced Air-Cooling, Add	*8,085.00*	
		For External Control Panel, Add	*2,021.25*	
		For Internally Mounted Current Transformers And Linear Couplers, Add	*673.75*	
		For Lightning Arrester On 15 kV Transformer Station Type And Mounting, Add	*3,368.75*	
		For Lightning Arrester On 34.5 kV Transformer Station Type And Mounting, Add	*8,421.88*	
		For Lightning Arrester On 69 kV Transformer Station Type And Mounting, Add	*10,106.25*	
26 11 13 00-0018	EA	5,000 KVA, 14.4 KV Primary, Substation Switchyard, 2 Winding, 3 Phase, Oil Filled	112,005.98	3,497.23
		For 50 Hz Operation, Add	*12,580.66*	
		For Forced Air-Cooling, Add	*12,580.66*	
		For External Control Panel, Add	*3,145.16*	
		For Internally Mounted Current Transformers And Linear Couplers, Add	*1,048.39*	
		For Lightning Arrester On 15 kV Transformer Station Type And Mounting, Add	*5,241.94*	
		For Lightning Arrester On 34.5 kV Transformer Station Type And Mounting, Add	*13,104.85*	
		For Lightning Arrester On 69 kV Transformer Station Type And Mounting, Add	*15,725.82*	
26 11 13 00-0019	EA	7,500 KVA, 14.4 KV Primary, Substation Switchyard, 2 Winding, 3 Phase, Oil Filled	163,846.54	4,290.11
		For 50 Hz Operation, Add	*18,551.20*	
		For Forced Air-Cooling, Add	*18,551.20*	
		For External Control Panel, Add	*4,637.80*	
		For Internally Mounted Current Transformers And Linear Couplers, Add	*1,545.93*	
		For Lightning Arrester On 15 kV Transformer Station Type And Mounting, Add	*7,729.67*	
		For Lightning Arrester On 34.5 kV Transformer Station Type And Mounting, Add	*19,324.17*	
		For Lightning Arrester On 69 kV Transformer Station Type And Mounting, Add	*23,189.00*	
26 11 13 00-0020	EA	10,000 KVA, 14.4 KV Primary, Substation Switchyard, 2 Winding, 3 Phase, Oil Filled	201,698.69	5,551.92
		For 50 Hz Operation, Add	*22,815.86*	
		For Forced Air-Cooling, Add	*22,815.86*	
		For External Control Panel, Add	*5,703.97*	
		For Internally Mounted Current Transformers And Linear Couplers, Add	*1,901.32*	
		For Lightning Arrester On 15 kV Transformer Station Type And Mounting, Add	*9,506.61*	
		For Lightning Arrester On 34.5 kV Transformer Station Type And Mounting, Add	*23,766.53*	
		For Lightning Arrester On 69 kV Transformer Station Type And Mounting, Add	*28,519.83*	
26 11 13 00-0021		**23 KV Nominal Primary** *(26 11 13 00-0014)*		
26 11 13 00-0022	EA	1,000 KVA, 23 KV Primary, Substation Switchyard, 2 Winding, 3 Phase, Oil Filled	70,687.75	2,681.20
		For 50 Hz Operation, Add	*7,877.80*	
		For External Control Panel, Add	*1,969.45*	
		For Internally Mounted Current Transformers And Linear Couplers, Add	*656.48*	
		For Lightning Arrester On 15 kV Transformer Station Type And Mounting, Add	*3,282.42*	
		For Lightning Arrester On 34.5 kV Transformer Station Type And Mounting, Add	*8,206.04*	
		For Lightning Arrester On 69 kV Transformer Station Type And Mounting, Add	*9,847.25*	
		For Forced Air-Cooling, Add	*5,251.87*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 11 13 00-0023	EA	2,000 KVA, 23 KV Primary, Substation Switchyard, 2 Winding, 3 Phase, Oil Filled	80,371.57	2,681.20
		For 50 Hz Operation, Add	*8,914.35*	
		For External Control Panel, Add	*2,228.59*	
		For Internally Mounted Current Transformers And Linear Couplers, Add	*742.86*	
		For Lightning Arrester On 15 kV Transformer Station Type And Mounting, Add	*3,714.31*	
		For Lightning Arrester On 34.5 kV Transformer Station Type And Mounting, Add	*9,285.78*	
		For Lightning Arrester On 69 kV Transformer Station Type And Mounting, Add	*11,142.94*	
		For Forced Air-Cooling, Add	*5,942.90*	
26 11 13 00-0024	EA	5,000 KVA, 23 KV Primary, Substation Switchyard, 2 Winding, 3 Phase, Oil Filled	130,671.28	3,963.52
		For 50 Hz Operation, Add	*14,712.99*	
		For External Control Panel, Add	*3,678.25*	
		For Internally Mounted Current Transformers And Linear Couplers, Add	*1,226.08*	
		For Lightning Arrester On 15 kV Transformer Station Type And Mounting, Add	*6,130.41*	
		For Lightning Arrester On 34.5 kV Transformer Station Type And Mounting, Add	*15,326.03*	
		For Lightning Arrester On 69 kV Transformer Station Type And Mounting, Add	*18,391.23*	
		For Forced Air-Cooling, Add	*9,808.66*	
26 11 13 00-0025	EA	7,500 KVA, 23 KV Primary, Substation Switchyard, 2 Winding, 3 Phase, Oil Filled	175,044.63	5,551.92
		For 50 Hz Operation, Add	*19,617.38*	
		For External Control Panel, Add	*4,904.34*	
		For Internally Mounted Current Transformers And Linear Couplers, Add	*1,634.78*	
		For Lightning Arrester On 15 kV Transformer Station Type And Mounting, Add	*8,173.91*	
		For Lightning Arrester On 34.5 kV Transformer Station Type And Mounting, Add	*20,434.77*	
		For Lightning Arrester On 69 kV Transformer Station Type And Mounting, Add	*24,521.72*	
		For Forced Air-Cooling, Add	*13,078.25*	
26 11 13 00-0026	EA	10,000 KVA, 23 KV Primary, Substation Switchyard, 2 Winding, 3 Phase, Oil Filled	219,468.12	5,551.92
		For 50 Hz Operation, Add	*24,948.20*	
		For External Control Panel, Add	*6,237.05*	
		For Internally Mounted Current Transformers And Linear Couplers, Add	*2,079.02*	
		For Lightning Arrester On 15 kV Transformer Station Type And Mounting, Add	*10,395.08*	
		For Lightning Arrester On 34.5 kV Transformer Station Type And Mounting, Add	*25,987.70*	
		For Lightning Arrester On 69 kV Transformer Station Type And Mounting, Add	*31,185.24*	
		For Forced Air-Cooling, Add	*16,632.13*	

26 11 13 00-0027 34.5 KV Nominal Primary *(26 11 13 00-0014)*

26 11 13 00-0028	EA	1,000 KVA, 34.5 KV Primary, Substation Switchyard, 2 Winding, 3 Phase, Oil Filled	89,009.47	3,205.80
		For 50 Hz Operation, Add	*9,950.90*	
		For External Control Panel, Add	*2,487.72*	
		For Internally Mounted Current Transformers And Linear Couplers, Add	*829.24*	
		For Lightning Arrester On 15 kV Transformer Station Type And Mounting, Add	*4,146.21*	
		For Lightning Arrester On 34.5 kV Transformer Station Type And Mounting, Add	*10,365.52*	
		For Lightning Arrester On 69 kV Transformer Station Type And Mounting, Add	*12,438.62*	
		For Forced Air-Cooling, Add	*6,633.93*	
26 11 13 00-0029	EA	2,000 KVA, 34.5 KV Primary, Substation Switchyard, 2 Winding, 3 Phase, Oil Filled	107,530.00	5,012.70
		For 50 Hz Operation, Add	*12,023.99*	
		For External Control Panel, Add	*3,006.00*	
		For Internally Mounted Current Transformers And Linear Couplers, Add	*1,002.00*	
		For Lightning Arrester On 15 kV Transformer Station Type And Mounting, Add	*5,010.00*	
		For Lightning Arrester On 34.5 kV Transformer Station Type And Mounting, Add	*12,524.99*	
		For Lightning Arrester On 69 kV Transformer Station Type And Mounting, Add	*15,029.99*	
		For Forced Air-Cooling, Add	*8,016.00*	
26 11 13 00-0030	EA	5,000 KVA, 34.5 KV Primary, Substation Switchyard, 2 Winding, 3 Phase, Oil Filled	148,680.42	5,012.70
		For 50 Hz Operation, Add	*16,632.19*	
		For External Control Panel, Add	*4,158.05*	
		For Internally Mounted Current Transformers And Linear Couplers, Add	*1,386.02*	
		For Lightning Arrester On 15 kV Transformer Station Type And Mounting, Add	*6,930.08*	
		For Lightning Arrester On 34.5 kV Transformer Station Type And Mounting, Add	*17,325.20*	
		For Lightning Arrester On 69 kV Transformer Station Type And Mounting, Add	*20,790.24*	
		For Forced Air-Cooling, Add	*11,088.13*	
26 11 13 00-0031	EA	7,500 KVA, 34.5 KV Primary, Substation Switchyard, 2 Winding, 3 Phase, Oil Filled	192,813.91	5,425.73
		For 50 Hz Operation, Add	*21,749.69*	
		For External Control Panel, Add	*5,437.42*	
		For Internally Mounted Current Transformers And Linear Couplers, Add	*1,812.47*	
		For Lightning Arrester On 15 kV Transformer Station Type And Mounting, Add	*9,062.37*	
		For Lightning Arrester On 34.5 kV Transformer Station Type And Mounting, Add	*22,655.93*	
		For Lightning Arrester On 69 kV Transformer Station Type And Mounting, Add	*27,187.11*	
		For Forced Air-Cooling, Add	*14,499.79*	
26 11 13 00-0032	EA	10,000 KVA, 34.5 KV Primary, Substation Switchyard, 2 Winding, 3 Phase, Oil Filled	338,207.78	6,939.90
		For 50 Hz Operation, Add	*38,808.32*	
		For External Control Panel, Add	*9,702.08*	
		For Internally Mounted Current Transformers And Linear Couplers, Add	*3,234.03*	
		For Lightning Arrester On 15 kV Transformer Station Type And Mounting, Add	*16,170.13*	
		For Lightning Arrester On 34.5 kV Transformer Station Type And Mounting, Add	*40,425.33*	
		For Lightning Arrester On 69 kV Transformer Station Type And Mounting, Add	*48,510.40*	
		For Forced Air-Cooling, Add	*25,872.21*	

26 11 13 00-0033 46 KV Nominal Primary *(26 11 13 00-0014)*

26 11 13 00-0034	EA	1,000 KVA, 46 KV Primary, Substation Switchyard, 2 Winding, 3 Phase, Oil Filled	138,510.99	3,730.38
		For 50 Hz Operation, Add	*15,741.71*	
		For External Control Panel, Add	*3,935.43*	
		For Internally Mounted Current Transformers And Linear Couplers, Add	*1,311.81*	
		For Lightning Arrester On 15 kV Transformer Station Type And Mounting, Add	*6,559.05*	
		For Lightning Arrester On 34.5 kV Transformer Station Type And Mounting, Add	*16,397.62*	
		For Lightning Arrester On 69 kV Transformer Station Type And Mounting, Add	*19,677.14*	
		For Forced Air-Cooling, Add	*10,494.48*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 11 13 00-0035	EA	2,000 KVA, 46 KV Primary, Substation Switchyard, 2 Winding, 3 Phase, Oil Filled	156,784.91	3,730.38
		For 50 Hz Operation, Add	*17,846.62*	
		For External Control Panel, Add	*4,461.66*	
		For Internally Mounted Current Transformers And Linear Couplers, Add	*1,487.22*	
		For Lightning Arrester On 15 kV Transformer Station Type And Mounting, Add	*7,436.09*	
		For Lightning Arrester On 34.5 kV Transformer Station Type And Mounting, Add	*18,590.23*	
		For Lightning Arrester On 69 kV Transformer Station Type And Mounting, Add	*22,308.28*	
		For Forced Air-Cooling, Add	*11,897.75*	
26 11 13 00-0036	EA	5,000 KVA, 46 KV Primary, Substation Switchyard, 2 Winding, 3 Phase, Oil Filled	218,283.14	5,012.70
		For 50 Hz Operation, Add	*24,984.52*	
		For External Control Panel, Add	*6,246.13*	
		For Internally Mounted Current Transformers And Linear Couplers, Add	*2,082.04*	
		For Lightning Arrester On 15 kV Transformer Station Type And Mounting, Add	*10,410.22*	
		For Lightning Arrester On 34.5 kV Transformer Station Type And Mounting, Add	*26,025.54*	
		For Lightning Arrester On 69 kV Transformer Station Type And Mounting, Add	*31,230.65*	
		For Forced Air-Cooling, Add	*16,656.35*	
26 11 13 00-0037	EA	7,500 KVA, 46 KV Primary, Substation Switchyard, 2 Winding, 3 Phase, Oil Filled	264,987.02	6,939.90
		For 50 Hz Operation, Add	*30,021.83*	
		For External Control Panel, Add	*7,505.46*	
		For Internally Mounted Current Transformers And Linear Couplers, Add	*2,501.82*	
		For Lightning Arrester On 15 kV Transformer Station Type And Mounting, Add	*12,509.10*	
		For Lightning Arrester On 34.5 kV Transformer Station Type And Mounting, Add	*31,272.74*	
		For Lightning Arrester On 69 kV Transformer Station Type And Mounting, Add	*37,527.29*	
		For Forced Air-Cooling, Add	*20,014.55*	
26 11 13 00-0038	EA	10,000 KVA, 46 KV Primary, Substation Switchyard, 2 Winding, 3 Phase, Oil Filled	382,741.33	6,939.90
		For 50 Hz Operation, Add	*44,152.35*	
		For External Control Panel, Add	*11,038.09*	
		For Internally Mounted Current Transformers And Linear Couplers, Add	*3,679.36*	
		For Lightning Arrester On 15 kV Transformer Station Type And Mounting, Add	*18,396.81*	
		For Lightning Arrester On 34.5 kV Transformer Station Type And Mounting, Add	*45,992.03*	
		For Lightning Arrester On 69 kV Transformer Station Type And Mounting, Add	*55,190.43*	
		For Forced Air-Cooling, Add	*29,434.90*	

26 11 13 00-0039 69 KV Nominal Primary *(26 11 13 00-0014)*

26 11 13 00-0040	EA	1,000 KVA, 69 KV Primary, Substation Switchyard, 2 Winding, 3 Phase, Oil Filled	201,890.10	3,963.52
		For 50 Hz Operation, Add	*23,259.24*	
		For External Control Panel, Add	*5,814.81*	
		For Internally Mounted Current Transformers And Linear Couplers, Add	*1,938.27*	
		For Lightning Arrester On 15 kV Transformer Station Type And Mounting, Add	*9,691.35*	
		For Lightning Arrester On 34.5 kV Transformer Station Type And Mounting, Add	*24,228.38*	
		For Lightning Arrester On 69 kV Transformer Station Type And Mounting, Add	*29,074.06*	
		For Forced Air-Cooling, Add	*15,506.16*	
26 11 13 00-0041	EA	2,000 KVA, 69 KV Primary, Substation Switchyard, 2 Winding, 3 Phase, Oil Filled	231,054.40	5,012.70
		For 50 Hz Operation, Add	*26,517.07*	
		For External Control Panel, Add	*6,629.27*	
		For Internally Mounted Current Transformers And Linear Couplers, Add	*2,209.76*	
		For Lightning Arrester On 15 kV Transformer Station Type And Mounting, Add	*11,048.78*	
		For Lightning Arrester On 34.5 kV Transformer Station Type And Mounting, Add	*27,621.95*	
		For Lightning Arrester On 69 kV Transformer Station Type And Mounting, Add	*33,146.34*	
		For Forced Air-Cooling, Add	*17,678.05*	
26 11 13 00-0042	EA	5,000 KVA, 69 KV Primary, Substation Switchyard, 2 Winding, 3 Phase, Oil Filled	321,334.27	5,012.70
		For 50 Hz Operation, Add	*37,350.65*	
		For External Control Panel, Add	*9,337.66*	
		For Internally Mounted Current Transformers And Linear Couplers, Add	*3,112.55*	
		For Lightning Arrester On 15 kV Transformer Station Type And Mounting, Add	*15,562.77*	
		For Lightning Arrester On 34.5 kV Transformer Station Type And Mounting, Add	*38,906.93*	
		For Lightning Arrester On 69 kV Transformer Station Type And Mounting, Add	*46,688.32*	
		For Forced Air-Cooling, Add	*24,900.44*	
26 11 13 00-0043	EA	7,500 KVA, 69 KV Primary, Substation Switchyard, 2 Winding, 3 Phase, Oil Filled	336,915.71	6,939.90
		For 50 Hz Operation, Add	*38,653.27*	
		For External Control Panel, Add	*9,663.32*	
		For Internally Mounted Current Transformers And Linear Couplers, Add	*3,221.11*	
		For Lightning Arrester On 15 kV Transformer Station Type And Mounting, Add	*16,105.53*	
		For Lightning Arrester On 34.5 kV Transformer Station Type And Mounting, Add	*40,263.83*	
		For Lightning Arrester On 69 kV Transformer Station Type And Mounting, Add	*48,316.59*	
		For Forced Air-Cooling, Add	*25,768.85*	
26 11 13 00-0044	EA	10,000 KVA, 69 KV Primary, Substation Switchyard, 2 Winding, 3 Phase, Oil Filled	445,653.68	6,939.90
		For 50 Hz Operation, Add	*51,701.83*	
		For External Control Panel, Add	*12,925.46*	
		For Internally Mounted Current Transformers And Linear Couplers, Add	*4,308.49*	
		For Lightning Arrester On 15 kV Transformer Station Type And Mounting, Add	*21,542.43*	
		For Lightning Arrester On 34.5 kV Transformer Station Type And Mounting, Add	*53,856.07*	
		For Lightning Arrester On 69 kV Transformer Station Type And Mounting, Add	*64,627.29*	
		For Forced Air-Cooling, Add	*34,467.89*	

26 11 13 00-0045 Circuit Breakers Fluarc SF6 13.8 KV *(26 11 13)*

26 11 13 00-0046	EA	1,200 Amperes, 500 MVA, Fluarc Breaker, 13.8 KV Substation, Secondary Distribution Section	123,735.74	991.31
26 11 13 00-0047	EA	1,200 Amperes, 750 MVA, Fluarc Breaker, 13.8 KV Substation, Secondary Distribution Section	136,064.86	991.31
26 11 13 00-0048	EA	1,200 Amperes, 1,000 MVA, Fluarc Breaker, 13.8 KV Substation, Secondary Distribution Section	154,691.26	1,231.37
26 11 13 00-0049	EA	2,000 Amperes, 500 MVA, Fluarc Breaker, 13.8 KV Substation, Secondary Distribution Section	143,938.35	1,480.66
26 11 13 00-0050	EA	2,000 Amperes, 750 MVA, Fluarc Breaker, 13.8 KV Substation, Secondary Distribution Section	162,564.11	1,480.66
26 11 13 00-0051	EA	2,000 Amperes, 1,000 MVA, Fluarc Breaker, 13.8 KV Substation, Secondary Distribution Section	185,394.41	1,720.20
26 11 13 00-0052	EA	3,000 Amperes, 500 MVA, Fluarc Breaker, 13.8 KV Substation, Secondary Distribution Section	190,707.01	1,965.34
26 11 13 00-0053	EA	3,000 Amperes, 750 MVA, Fluarc Breaker, 13.8 KV Substation, Secondary Distribution Section	213,897.13	1,965.34

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 11 13 00-0054	EA	3,000 Amperes, 1,000 MVA, Fluarc Breaker, 13.8 KV Substation, Secondary Distribution Section	223,875.02	2,207.09

26 11 16 Secondary Unit Substations *(26 11)*

26 11 16 11 Secondary Unit Substations with Switchgear Secondary *(26 11 16)*

26 11 16 11-0001 Substation Primary Incoming Section *(26 11 16 11)*

26 11 16 11-0002 Manual Transferring Fused Load Break Switches *(26 11 16 11-0001)*

Note: 15 KV 600 Amp 3 pole 2 position floor mounted. Type, metal compartment includes weatherproofing, fuses, transformer throat, pothead terminations thru 500 MCM, with surge protection. Manual transferring of one line to an alternate incoming line.

26 11 16 11-0003	EA	112.5 Thru 1,500 KVA Transformers Load Switch, 600 Amperes, 3 Pole, 2 Position	47,412.01	1,455.70
26 11 16 11-0004	EA	2,000 And 2,500 KVA Transformers Load Switch, 600 Amperes, 3 Pole, 2 Position	54,854.86	1,455.70

26 11 16 11-0005 Automatic Transferring Fused Load Break Switches *(26 11 16 11-0001)*

Note: Items are equipped with 3 pole - 2 position selector switch for automatic transferring one line to an alternate incoming line.

26 11 16 11-0006	EA	112.5 Thru 1,500 KVA Transformers Load Switch, 600 Amperes, 3 Pole, 2 Position Selector Switch	67,211.43	1,455.70
26 11 16 11-0007	EA	2,000 And 2,500 KVA Transformers Load Switch, 600 Amperes, 3 Pole, 2 Position Selector Switch	72,055.29	1,455.70

26 11 16 11-0008 Accessories For Substation Fused Load Break Switches *(26 11 16 11-0001)*

26 11 16 11-0009	EA	Primary Lightning Arrestors Accessories, Secondary Distribution Section	28,793.32	
26 11 16 11-0010	EA	Key Interlock Accessories, Secondary Distribution Section	2,802.66	

26 11 16 11-0011 Oil Filled Substation Transformers *(26 11 16 11)*

Note: 112-1/2 KVA thru 2500 KVA standard NEMA design 3 phase cover mounted manual tap changer, liquid level gauge with alarm contacts, thermometer with alarm contacts, pressure vacuum gauge, automatic control for auxiliary cooling equipment. Weatherproof.

26 11 16 11-0012 Substation, Primary 13.8 KV Secondary 480Y/277 Or 480 Volt, 60 HZ *(26 11 16 11-0011)*

26 11 16 11-0013	EA	75 KVA, Substation, Secondary 480 Y / 277 Volt, Primary 13.8 KV, Oil Transformer, Weatherproof	49,353.40	874.30
		For Forced Air-Cooling, 750 KVA And Above Rating 15% Thru 2,499 kV And 25% For 2,500 kV, Add	*3,332.33*	
		For Control Power Transformer On Fans And Auxiliary, Add	*1,428.14*	
		For Internal Mounted Current Transformer And Linear Coupler, Add	*476.05*	
26 11 16 11-0014	EA	112.5 KVA, Substation, Secondary 480 Y / 277 Volt, Primary 13.8 KV, Oil Transformer, Weatherproof	73,202.39	1,049.17
		For Forced Air-Cooling, 750 KVA And Above Rating 15% Thru 2,499 kV And 25% For 2,500 kV, Add	*4,977.28*	
		For Control Power Transformer On Fans And Auxiliary, Add	*2,133.12*	
		For Internal Mounted Current Transformer And Linear Coupler, Add	*711.04*	
26 11 16 11-0015	EA	150 KVA, Substation, Secondary 480 Y / 277 Volt, Primary 13.8 KV, Oil Transformer, Weatherproof	82,919.61	1,165.75
		For Forced Air-Cooling, 750 KVA And Above Rating 15% Thru 2,499 kV And 25% For 2,500 kV, Add	*5,641.17*	
		For Control Power Transformer On Fans And Auxiliary, Add	*2,417.64*	
		For Internal Mounted Current Transformer And Linear Coupler, Add	*805.88*	
26 11 16 11-0016	EA	225 KVA, Substation, Secondary 480 Y / 277 Volt, Primary 13.8 KV, Oil Transformer, Weatherproof	97,878.41	1,457.18
		For Forced Air-Cooling, 750 KVA And Above Rating 15% Thru 2,499 kV And 25% For 2,500 kV, Add	*6,647.48*	
		For Control Power Transformer On Fans And Auxiliary, Add	*2,848.92*	
		For Internal Mounted Current Transformer And Linear Coupler, Add	*949.64*	
26 11 16 11-0017	EA	300 KVA, Substation, Secondary 480 Y / 277 Volt, Primary 13.8 KV, Oil Transformer, Weatherproof	108,564.33	1,806.90
		For Forced Air-Cooling, 750 KVA And Above Rating 15% Thru 2,499 kV And 25% For 2,500 kV, Add	*7,346.54*	
		For Control Power Transformer On Fans And Auxiliary, Add	*3,148.52*	
		For Internal Mounted Current Transformer And Linear Coupler, Add	*1,049.51*	
26 11 16 11-0018	EA	500 KVA, Substation, Secondary 480 Y / 277 Volt, Primary 13.8 KV, Oil Transformer, Weatherproof	115,217.96	2,214.92
		For Forced Air-Cooling, 750 KVA And Above Rating 15% Thru 2,499 kV And 25% For 2,500 kV, Add	*7,755.17*	
		For Control Power Transformer On Fans And Auxiliary, Add	*3,323.64*	
		For Internal Mounted Current Transformer And Linear Coupler, Add	*1,107.88*	
26 11 16 11-0019	EA	750 KVA, Substation, Secondary 480 Y / 277 Volt, Primary 13.8 KV, Oil Transformer, Weatherproof	134,578.41	2,681.20
		For Forced Air-Cooling, 750 KVA And Above Rating 15% Thru 2,499 kV And 25% For 2,500 kV, Add	*9,045.12*	
		For Control Power Transformer On Fans And Auxiliary, Add	*3,876.48*	
		For Internal Mounted Current Transformer And Linear Coupler, Add	*1,292.16*	
26 11 16 11-0020	EA	1,000 KVA, Substation, Secondary 480 Y / 277 Volt, Primary 13.8 KV, Oil Transformer, Weatherproof	143,215.46	2,914.35
		For Forced Air-Cooling, 750 KVA And Above Rating 15% Thru 2,499 kV And 25% For 2,500 kV, Add	*9,617.07*	
		For Control Power Transformer On Fans And Auxiliary, Add	*4,121.60*	
		For Internal Mounted Current Transformer And Linear Coupler, Add	*1,373.87*	
26 11 16 11-0021	EA	1,500 KVA, Substation, Secondary 480 Y / 277 Volt, Primary 13.8 KV, Oil Transformer, Weatherproof	160,192.72	3,205.80
		For Forced Air-Cooling, 750 KVA And Above Rating 15% Thru 2,499 kV And 25% For 2,500 kV, Add	*10,764.68*	
		For Control Power Transformer On Fans And Auxiliary, Add	*4,613.43*	
		For Internal Mounted Current Transformer And Linear Coupler, Add	*1,537.81*	
26 11 16 11-0022	EA	2,000 KVA, Substation, Secondary 480 Y / 277 Volt, Primary 13.8 KV, Oil Transformer, Weatherproof	185,739.36	3,555.52
		For Forced Air-Cooling, 750 KVA And Above Rating 15% Thru 2,499 kV And 25% For 2,500 kV, Add	*12,503.98*	
		For Control Power Transformer On Fans And Auxiliary, Add	*5,358.85*	
		For Internal Mounted Current Transformer And Linear Coupler, Add	*1,786.28*	
26 11 16 11-0023	EA	2,500 KVA, Substation, Secondary 480 Y / 277 Volt, Primary 13.8 KV, Oil Transformer, Weatherproof	204,044.14	3,876.09
		For Forced Air-Cooling, 750 KVA And Above Rating 15% Thru 2,499 kV And 25% For 2,500 kV, Add	*13,740.44*	
		For Control Power Transformer On Fans And Auxiliary, Add	*5,888.76*	
		For Internal Mounted Current Transformer And Linear Coupler, Add	*1,962.92*	

26 11 16 11-0024 Substation, Primary 13.8 KV Secondary 208Y/120 Volt, 60 HZ *(26 11 16 11-0011)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 11 16 11-0025	EA	75 KVA, Substation, Secondary 208 Y / 120 Volt, Primary 13.8 KV, Oil Transformer, Weatherproof	46,978.46	874.30
		For Forced Air-Cooling, 750 KVA And Above Rating 15% Thru 2,499 kV And 25% For 2,500 kV, Add	*3,166.09*	
		For Control Power Transformer On Fans And Auxiliary, Add	*1,356.90*	
		For Internal Mounted Current Transformer And Linear Coupler, Add	*452.30*	
26 11 16 11-0026	EA	112.5 KVA, Substation, Secondary 208 Y / 120 Volt, Primary 13.8 KV, Oil Transformer, Weatherproof	72,082.57	874.30
		For Forced Air-Cooling, 750 KVA And Above Rating 15% Thru 2,499 kV And 25% For 2,500 kV, Add	*4,923.38*	
		For Control Power Transformer On Fans And Auxiliary, Add	*2,110.02*	
		For Internal Mounted Current Transformer And Linear Coupler, Add	*703.34*	
26 11 16 11-0027	EA	150 KVA, Substation, Secondary 208 Y / 120 Volt, Primary 13.8 KV, Oil Transformer, Weatherproof	82,867.05	1,165.75
		For Forced Air-Cooling, 750 KVA And Above Rating 15% Thru 2,499 kV And 25% For 2,500 kV, Add	*5,637.49*	
		For Control Power Transformer On Fans And Auxiliary, Add	*2,416.07*	
		For Internal Mounted Current Transformer And Linear Coupler, Add	*805.36*	
26 11 16 11-0028	EA	225 KVA, Substation, Secondary 208 Y / 120 Volt, Primary 13.8 KV, Oil Transformer, Weatherproof	97,968.83	1,457.18
		For Forced Air-Cooling, 750 KVA And Above Rating 15% Thru 2,499 kV And 25% For 2,500 kV, Add	*6,653.81*	
		For Control Power Transformer On Fans And Auxiliary, Add	*2,851.63*	
		For Internal Mounted Current Transformer And Linear Coupler, Add	*950.54*	
26 11 16 11-0029	EA	300 KVA, Substation, Secondary 208 Y / 120 Volt, Primary 13.8 KV, Oil Transformer, Weatherproof	117,792.78	1,806.90
		For Forced Air-Cooling, 750 KVA And Above Rating 15% Thru 2,499 kV And 25% For 2,500 kV, Add	*7,992.53*	
		For Control Power Transformer On Fans And Auxiliary, Add	*3,425.37*	
		For Internal Mounted Current Transformer And Linear Coupler, Add	*1,141.79*	
26 11 16 11-0030	EA	500 KVA, Substation, Secondary 208 Y / 120 Volt, Primary 13.8 KV, Oil Transformer, Weatherproof	126,709.04	2,214.92
		For Forced Air-Cooling, 750 KVA And Above Rating 15% Thru 2,499 kV And 25% For 2,500 kV, Add	*8,559.55*	
		For Control Power Transformer On Fans And Auxiliary, Add	*3,668.38*	
		For Internal Mounted Current Transformer And Linear Coupler, Add	*1,222.79*	
26 11 16 11-0031	EA	750 KVA, Substation, Secondary 208 Y / 120 Volt, Primary 13.8 KV, Oil Transformer, Weatherproof	139,884.55	2,681.20
		For Forced Air-Cooling, 750 KVA And Above Rating 15% Thru 2,499 kV And 25% For 2,500 kV, Add	*9,416.55*	
		For Control Power Transformer On Fans And Auxiliary, Add	*4,035.66*	
		For Internal Mounted Current Transformer And Linear Coupler, Add	*1,345.22*	
26 11 16 11-0032	EA	1,000 KVA, Substation, Secondary 208 Y / 120 Volt, Primary 13.8 KV, Oil Transformer, Weatherproof	152,355.77	2,914.35
		For Forced Air-Cooling, 750 KVA And Above Rating 15% Thru 2,499 kV And 25% For 2,500 kV, Add	*10,256.89*	
		For Control Power Transformer On Fans And Auxiliary, Add	*4,395.81*	
		For Internal Mounted Current Transformer And Linear Coupler, Add	*1,465.27*	
26 11 16 11-0033	EA	1,500 KVA, Substation, Secondary 208 Y / 120 Volt, Primary 13.8 KV, Oil Transformer, Weatherproof	172,012.54	3,205.80
		For Forced Air-Cooling, 750 KVA And Above Rating 15% Thru 2,499 kV And 25% For 2,500 kV, Add	*11,592.07*	
		For Control Power Transformer On Fans And Auxiliary, Add	*4,968.03*	
		For Internal Mounted Current Transformer And Linear Coupler, Add	*1,656.01*	

26 11 16 11-0034 Accessories For Oil Filled Substation Transformers *(26 11 16 11-0011)*

26 11 16 11-0035	EA	Sudden Pressure Relay	14,428.82	
26 11 16 11-0036	EA	Throats Or Flanges (HV Or LV)	28,646.11	
26 11 16 11-0037	EA	Lightning Arrestors (3 - 1 Pole)	18,862.36	
26 11 16 11-0038	EA	Single Feeder Switch With Fuses 3 Pole, 2 Position, Open-Close Close) Fuse Type - CLE (80E To 125 X)	104,676.64	
26 11 16 11-0039	EA	Oil Fuse Cutout, 15 KV, 200 Amperes, Free Standing Air Filled Terminal Compartment, 15 KV - 200 Amp Cutout	97,935.41	

26 11 16 11-0040 Reinforced Concrete Curb With 6" Slab *(26 11 16 11-0011)*

Note: For transformer liquid containment area.

26 11 16 11-0041	EA	112.5 KVA, Reinforced Curb With 6" Slab, Transformer Liquid Containment Area	10,355.92	1,497.28
26 11 16 11-0042	EA	150 KVA, Reinforced Curb With 6" Slab, Transformer Liquid Containment Area	10,355.92	1,497.28
26 11 16 11-0043	EA	225 KVA, Reinforced Curb With 6" Slab, Transformer Liquid Containment Area	10,355.92	1,497.28
26 11 16 11-0044	EA	300 KVA, Reinforced Curb With 6" Slab, Transformer Liquid Containment Area	10,355.92	1,497.28
26 11 16 11-0045	EA	500 KVA, Reinforced Curb With 6" Slab, Transformer Liquid Containment Area	10,355.92	1,497.28
26 11 16 11-0046	EA	750 KVA, Reinforced Curb With 6" Slab, Transformer Liquid Containment Area	10,355.92	1,497.28
26 11 16 11-0047	EA	1,000 KVA, Reinforced Curb With 6" Slab, Transformer Liquid Containment Area	10,355.92	1,497.28
26 11 16 11-0048	EA	1,500 KVA, Reinforced Curb With 6" Slab, Transformer Liquid Containment Area	12,795.16	1,726.40

26 11 16 11-0049 Dry Type Substation Transformer *(26 11 16 11)*

Note: Standard NEMA design 3 phase - 150 C rise - 60 Hz self-cooled, ventilated.

26 11 16 11-0050 Primary 4.16 Or 4.8 KV Secondary 208 Y/120 Or 240 Volt *(26 11 16 11-0049)*

Note: Primary 4.160 or 4.8 KV (delta or wye).

26 11 16 11-0051	EA	112.5 KVA, Substation, Secondary 208 Y / 120 Volt Or 240 Volt, Primary 4.16 Or 4.8 KV, Dry Transformer	87,795.67	932.60
		For Gas Filled Transformers, Add	*51,558.29*	
		For Single Phase Transformers, Deduct	*-2,148.26*	
		For Dry Type Unit, Add	*19,091.22*	
26 11 16 11-0052	EA	150 KVA, Substation, Secondary 208 Y / 120 Volt Or 240 Volt, Primary 4.16 Or 4.8 KV, Dry Transformer	87,912.25	990.88
		For Gas Filled Transformers, Add	*51,558.29*	
		For Single Phase Transformers, Deduct	*-2,148.26*	
		For Dry Type Unit, Add	*19,102.88*	
26 11 16 11-0053	EA	225 KVA, Substation, Secondary 208 Y / 120 Volt Or 240 Volt, Primary 4.16 Or 4.8 KV, Dry Transformer	89,381.27	1,165.75
		For Gas Filled Transformers, Add	*52,229.87*	
		For Single Phase Transformers, Deduct	*-2,176.24*	
		For Dry Type Unit, Add	*19,384.10*	
26 11 16 11-0054	EA	300 KVA, Substation, Secondary 208 Y / 120 Volt Or 240 Volt, Primary 4.16 Or 4.8 KV, Dry Transformer	98,665.76	1,282.32
		For Gas Filled Transformers, Add	*57,660.68*	
		For Single Phase Transformers, Deduct	*-2,402.53*	
		For Dry Type Unit, Add	*21,398.71*	
26 11 16 11-0055	EA	500 KVA, Substation, Secondary 208 Y / 120 Volt Or 240 Volt, Primary 4.16 Or 4.8 KV, Dry Transformer	109,249.82	1,515.47
		For Gas Filled Transformers, Add	*63,731.33*	
		For Single Phase Transformers, Deduct	*-2,655.47*	
		For Dry Type Unit, Add	*23,671.25*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 11 16 11-0056	EA	750 KVA, Substation, Secondary 208 Y / 120 Volt Or 240 Volt, Primary 4.16 Or 4.8 KV, Dry Transformer	126,593.75	1,748.62
		For Gas Filled Transformers, Add	*73,857.91*	
		For Single Phase Transformers, Deduct	*-3,077.41*	
		For Dry Type Unit, Add	*27,430.96*	
26 11 16 11-0057	EA	1,000 KVA, Substation, Secondary 208 Y / 120 Volt Or 240 Volt, Primary 4.16 Or 4.8 KV, Dry Transformer	146,788.39	2,098.34
		For Gas Filled Transformers, Add	*85,555.03*	
		For Single Phase Transformers, Deduct	*-3,564.79*	
		For Dry Type Unit, Add	*31,789.85*	
26 11 16 11-0058	EA	1,500 KVA, Substation, Secondary 208 Y / 120 Volt Or 240 Volt, Primary 4.16 Or 4.8 KV, Dry Transformer	173,923.99	2,331.49
		For Gas Filled Transformers, Add	*101,556.61*	
		For Single Phase Transformers, Deduct	*-4,231.53*	
		For Dry Type Unit, Add	*37,703.72*	
26 11 16 11-0059	EA	2,000 KVA, Substation, Secondary 208 Y / 120 Volt Or 240 Volt, Primary 4.16 Or 4.8 KV, Dry Transformer	226,993.37	2,448.06
		For Gas Filled Transformers, Add	*133,258.35*	
		For Single Phase Transformers, Deduct	*-5,552.43*	
		For Dry Type Unit, Add	*49,351.01*	
26 11 16 11-0060		**Primary 4.16 Or 4.8 KV Secondary 480 Y/277 Or 480 Volt** *(26 11 16 11-0049)*		
		Note: Primary 4.16 or 4.8 KV (delta or wye).		
26 11 16 11-0061	EA	112.5 KVA, Substation, Secondary 480 Y / 277 Volt Or 480 Volt, Primary 4.16 Or 4.8 KV, Dry Transformer	84,746.24	932.60
		For Gas Filled Transformers, Add	*49,728.63*	
		For Single Phase Transformers, Deduct	*-2,072.03*	
		For Dry Type Unit, Add	*18,420.35*	
26 11 16 11-0062	EA	150 KVA, Substation, Secondary 480 Y / 277 Volt Or 480 Volt, Primary 4.16 Or 4.8 KV, Dry Transformer	87,912.25	990.88
		For Gas Filled Transformers, Add	*51,558.29*	
		For Single Phase Transformers, Deduct	*-2,148.26*	
		For Dry Type Unit, Add	*19,102.88*	
26 11 16 11-0063	EA	225 KVA, Substation, Secondary 480 Y / 277 Volt Or 480 Volt, Primary 4.16 Or 4.8 KV, Dry Transformer	89,381.27	1,165.75
		For Gas Filled Transformers, Add	*52,229.87*	
		For Single Phase Transformers, Deduct	*-2,176.24*	
		For Dry Type Unit, Add	*19,384.10*	
26 11 16 11-0064	EA	300 KVA, Substation, Secondary 480 Y / 277 Volt Or 480 Volt, Primary 4.16 Or 4.8 KV, Dry Transformer	98,665.76	1,282.32
		For Gas Filled Transformers, Add	*57,660.68*	
		For Single Phase Transformers, Deduct	*-2,402.53*	
		For Dry Type Unit, Add	*21,398.71*	
26 11 16 11-0065	EA	500 KVA, Substation, Secondary 480 Y / 277 Volt Or 480 Volt, Primary 4.16 Or 4.8 KV, Dry Transformer	109,249.82	1,515.47
		For Gas Filled Transformers, Add	*63,731.33*	
		For Single Phase Transformers, Deduct	*-2,655.47*	
		For Dry Type Unit, Add	*23,671.25*	
26 11 16 11-0066	EA	750 KVA, Substation, Secondary 480 Y / 277 Volt Or 480 Volt, Primary 4.16 Or 4.8 KV, Dry Transformer	126,593.75	1,748.62
		For Gas Filled Transformers, Add	*73,857.91*	
		For Single Phase Transformers, Deduct	*-3,077.41*	
		For Dry Type Unit, Add	*27,430.96*	
26 11 16 11-0067	EA	1,000 KVA, Substation, Secondary 480 Y / 277 Volt Or 480 Volt, Primary 4.16 Or 4.8 KV, Dry Transformer	146,788.39	2,098.34
		For Gas Filled Transformers, Add	*85,555.03*	
		For Single Phase Transformers, Deduct	*-3,564.79*	
		For Dry Type Unit, Add	*31,789.85*	
26 11 16 11-0068	EA	1,500 KVA, Substation, Secondary 480 Y / 277 Volt Or 480 Volt, Primary 4.16 Or 4.8 KV, Dry Transformer	173,923.99	2,331.49
		For Gas Filled Transformers, Add	*101,556.61*	
		For Single Phase Transformers, Deduct	*-4,231.53*	
		For Dry Type Unit, Add	*37,703.72*	
26 11 16 11-0069	EA	2,000 KVA, Substation, Secondary 480 Y / 277 Volt Or 480 Volt, Primary 4.16 Or 4.8 KV, Dry Transformer	226,993.37	2,448.06
		For Gas Filled Transformers, Add	*133,258.35*	
		For Single Phase Transformers, Deduct	*-5,552.43*	
		For Dry Type Unit, Add	*49,351.01*	
26 11 16 11-0070	EA	2,500 KVA, Substation, Secondary 480 Y / 277 Volt Or 480 Volt, Primary 4.16 Or 4.8 KV, Dry Transformer	249,489.13	2,564.63
		For Gas Filled Transformers, Add	*146,615.92*	
		For Single Phase Transformers, Deduct	*-6,109.00*	
		For Dry Type Unit, Add	*54,272.10*	
26 11 16 11-0071	EA	3,000 KVA, Substation, Secondary 480 Y / 277 Volt Or 480 Volt, Primary 4.16 Or 4.8 KV, Dry Transformer	278,956.27	2,681.20
		For Gas Filled Transformers, Add	*164,156.31*	
		For Single Phase Transformers, Deduct	*-6,839.85*	
		For Dry Type Unit, Add	*60,726.89*	
26 11 16 11-0072	EA	3,750 KVA, Substation, Secondary 480 Y / 277 Volt Or 480 Volt, Primary 4.16 Or 4.8 KV, Dry Transformer	322,339.74	2,797.78
		For Gas Filled Transformers, Add	*190,046.50*	
		For Single Phase Transformers, Deduct	*-7,918.60*	
		For Dry Type Unit, Add	*70,243.27*	
26 11 16 11-0073		**Primary 13.8 KV (Delta Or Wye) Secondary 208 Y/120 Or 240 Volt** *(26 11 16 11-0049)*		
26 11 16 11-0074	EA	112.5 KVA, Substation, Secondary 208 Y / 120 Volt Or 240 Volt, Primary 13.8 KV, Dry Transformer	94,339.21	1,049.17
		For Gas Filled Transformers, Add	*55,344.52*	
		For Single Phase Transformers, Deduct	*-2,306.02*	
		For Dry Type Unit, Add	*20,502.83*	
26 11 16 11-0075	EA	150 KVA, Substation, Secondary 208 Y / 120 Volt Or 240 Volt, Primary 13.8 KV, Dry Transformer	97,487.59	1,107.45
		For Gas Filled Transformers, Add	*57,163.60*	
		For Single Phase Transformers, Deduct	*-2,381.82*	
		For Dry Type Unit, Add	*21,181.48*	
26 11 16 11-0076	EA	225 KVA, Substation, Secondary 208 Y / 120 Volt Or 240 Volt, Primary 13.8 KV, Dry Transformer	104,050.74	1,282.32
		For Gas Filled Transformers, Add	*60,891.67*	
		For Single Phase Transformers, Deduct	*-2,537.15*	
		For Dry Type Unit, Add	*22,583.41*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 11 16 11-0077	EA	300 KVA, Substation, Secondary 208 Y / 120 Volt Or 240 Volt, Primary 13.8 KV, Dry Transformer	109,748.18	1,398.89
		For Gas Filled Transformers, Add	*64,170.24*	
		For Single Phase Transformers, Deduct	*-2,673.76*	
		For Dry Type Unit, Add	*23,808.87*	
26 11 16 11-0078	EA	500 KVA, Substation, Secondary 208 Y / 120 Volt Or 240 Volt, Primary 13.8 KV, Dry Transformer	125,056.22	1,632.04
		For Gas Filled Transformers, Add	*73,075.28*	
		For Single Phase Transformers, Deduct	*-3,044.80*	
		For Dry Type Unit, Add	*27,120.68*	
26 11 16 11-0079	EA	750 KVA, Substation, Secondary 208 Y / 120 Volt Or 240 Volt, Primary 13.8 KV, Dry Transformer	138,451.75	1,865.19
		For Gas Filled Transformers, Add	*80,832.82*	
		For Single Phase Transformers, Deduct	*-3,368.03*	
		For Dry Type Unit, Add	*30,011.74*	
26 11 16 11-0080	EA	1,000 KVA, Substation, Secondary 208 Y / 120 Volt Or 240 Volt, Primary 13.8 KV, Dry Transformer	161,581.25	2,214.92
		For Gas Filled Transformers, Add	*94,290.86*	
		For Single Phase Transformers, Deduct	*-3,928.79*	
		For Dry Type Unit, Add	*35,016.30*	
26 11 16 11-0081	EA	1,500 KVA, Substation, Secondary 208 Y / 120 Volt Or 240 Volt, Primary 13.8 KV, Dry Transformer	196,375.68	2,448.06
		For Gas Filled Transformers, Add	*114,887.74*	
		For Single Phase Transformers, Deduct	*-4,786.99*	
		For Dry Type Unit, Add	*42,615.12*	
26 11 16 11-0082	EA	2,000 KVA, Substation, Secondary 208 Y / 120 Volt Or 240 Volt, Primary 13.8 KV, Dry Transformer	238,313.76	2,564.63
		For Gas Filled Transformers, Add	*139,910.69*	
		For Single Phase Transformers, Deduct	*-5,829.61*	
		For Dry Type Unit, Add	*51,813.51*	

26 11 16 11-0083 Primary 13.8 KV (Delta Or Wye) Secondary 480 Y/277 Or 480 Volt *(26 11 16 11-0049)*

26 11 16 11-0084	EA	112.5 KVA, Substation, Secondary 480 Y / 277 Volt Or 480 Volt, Primary 13.8 KV, Dry Transformer	94,339.21	1,049.17
		For Gas Filled Transformers, Add	*55,344.52*	
		For Single Phase Transformers, Deduct	*-2,306.02*	
		For Dry Type Unit, Add	*20,502.83*	
26 11 16 11-0085	EA	150 KVA, Substation, Secondary 480 Y / 277 Volt Or 480 Volt, Primary 13.8 KV, Dry Transformer	97,487.59	1,107.45
		For Gas Filled Transformers, Add	*57,163.60*	
		For Single Phase Transformers, Deduct	*-2,381.82*	
		For Dry Type Unit, Add	*21,181.48*	
26 11 16 11-0086	EA	225 KVA, Substation, Secondary 480 Y / 277 Volt Or 480 Volt, Primary 13.8 KV, Dry Transformer	104,050.74	1,282.32
		For Gas Filled Transformers, Add	*60,891.67*	
		For Single Phase Transformers, Deduct	*-2,537.15*	
		For Dry Type Unit, Add	*22,583.41*	
26 11 16 11-0087	EA	300 KVA, Substation, Secondary 480 Y / 277 Volt Or 480 Volt, Primary 13.8 KV, Dry Transformer	109,748.18	1,398.89
		For Gas Filled Transformers, Add	*64,170.24*	
		For Single Phase Transformers, Deduct	*-2,673.76*	
		For Dry Type Unit, Add	*23,808.87*	
26 11 16 11-0088	EA	500 KVA, Substation, Secondary 480 Y / 277 Volt Or 480 Volt, Primary 13.8 KV, Dry Transformer	125,056.22	1,632.04
		For Gas Filled Transformers, Add	*73,075.28*	
		For Single Phase Transformers, Deduct	*-3,044.80*	
		For Dry Type Unit, Add	*27,120.68*	
26 11 16 11-0089	EA	750 KVA, Substation, Secondary 480 Y / 277 Volt Or 480 Volt, Primary 13.8 KV, Dry Transformer	120,824.99	1,865.19
		For Gas Filled Transformers, Add	*70,256.77*	
		For Single Phase Transformers, Deduct	*-2,927.37*	
		For Dry Type Unit, Add	*26,133.85*	
26 11 16 11-0090	EA	1,000 KVA, Substation, Secondary 480 Y / 277 Volt Or 480 Volt, Primary 13.8 KV, Dry Transformer	125,369.02	2,214.92
		For Gas Filled Transformers, Add	*72,563.52*	
		For Single Phase Transformers, Deduct	*-3,023.48*	
		For Dry Type Unit, Add	*27,049.61*	
26 11 16 11-0091	EA	1,500 KVA, Substation, Secondary 480 Y / 277 Volt Or 480 Volt, Primary 13.8 KV, Dry Transformer	154,886.84	2,448.06
		For Gas Filled Transformers, Add	*89,994.43*	
		For Single Phase Transformers, Deduct	*-3,749.77*	
		For Dry Type Unit, Add	*33,487.57*	
26 11 16 11-0092	EA	2,000 KVA, Substation, Secondary 480 Y / 277 Volt Or 480 Volt, Primary 13.8 KV, Dry Transformer	184,538.74	2,564.63
		For Gas Filled Transformers, Add	*107,645.68*	
		For Single Phase Transformers, Deduct	*-4,485.24*	
		For Dry Type Unit, Add	*39,983.01*	
26 11 16 11-0093	EA	2,500 KVA, Substation, Secondary 480 Y / 277 Volt Or 480 Volt, Primary 13.8 KV, Dry Transformer	206,764.54	2,681.20
		For Gas Filled Transformers, Add	*120,841.27*	
		For Single Phase Transformers, Deduct	*-5,035.05*	
		For Dry Type Unit, Add	*44,844.71*	
26 11 16 11-0094	EA	3,000 KVA, Substation, Secondary 480 Y / 277 Volt Or 480 Volt, Primary 13.8 KV, Dry Transformer	243,638.52	2,797.78
		For Gas Filled Transformers, Add	*142,825.77*	
		For Single Phase Transformers, Deduct	*-5,951.07*	
		For Dry Type Unit, Add	*52,929.01*	
26 11 16 11-0095	EA	3,750 KVA, Substation, Secondary 480 Y / 277 Volt Or 480 Volt, Primary 13.8 KV, Dry Transformer	300,097.79	2,914.35
		For Gas Filled Transformers, Add	*176,561.44*	
		For Single Phase Transformers, Deduct	*-7,356.73*	
		For Dry Type Unit, Add	*65,322.07*	

26 12 Medium-Voltage Transformers *(26 10)*

26 12 13 Liquid-Filled, Medium-Voltage Transformers *(26 12)*

26 12 13 00-0001 Removal And Relocation Of Transformers *(26 12 13)*

26 12 13 00-0002	EA	Removal And Relocation Of Up To 37.5 KVA Oil Filled Transformer	1,226.16
26 12 13 00-0003	EA	Removal And Relocation Of >37.5 To 100 KVA Oil Filled Transformers	2,256.48

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 12 13 00-0004		Single Phase Oil Filled Distribution Transformers *(26 12 13)* Note: Self-protected type, CSP, external secondary breaker handle, external tap changer.		
26 12 13 00-0005		Primary 4.16/4.8 KV Ground Y Secondary 120/240 Volt, 4-2.5 Percent Taps FCBN, Class A, 95 KV BIL. Rated To 5 KVA *(26 12 13 00-0004)*		
26 12 13 00-0006	EA	10 KVA Transformer Primary 4.16 / 4.8 KV Ground Y, Secondary 120/240 Volt, 4 Taps, Oil Filled, 1 Phase	9,993.69	486.91
26 12 13 00-0007	EA	15 KVA Transformer Primary 4.16 / 4.8 KV Ground Y, Secondary 120/240 Volt, 4 Taps, Oil Filled, 1 Phase	11,929.67	608.63
26 12 13 00-0008	EA	25 KVA Transformer Primary 4.16 / 4.8 KV Ground Y, Secondary 120/240 Volt, 4 Taps, Oil Filled, 1 Phase	13,811.18	730.36
26 12 13 00-0009	EA	37.5 KVA Transformer Primary 4.16 / 4.8 KV Ground Y, Secondary 120/240 Volt, 4 Taps, Oil Filled, 1 Phase	17,958.04	912.94
26 12 13 00-0010	EA	50 KVA Transformer Primary 4.16 / 4.8 KV Ground Y, Secondary 120/240 Volt, 4 Taps, Oil Filled, 1 Phase	21,285.88	1,095.53
26 12 13 00-0011	EA	75 KVA Transformer Primary 4.16 / 4.8 KV Ground Y, Secondary 120/240 Volt, 4 Taps, Oil Filled, 1 Phase	30,159.87	1,278.12
26 12 13 00-0012	EA	100 KVA Transformer Primary 4.16 / 4.8 KV Ground Y, Secondary 120/240 Volt, 4 Taps, Oil Filled, 1 Phase	35,702.38	1,521.57
26 12 13 00-0013		Primary 4.16/4.8 KV Ground Y Secondary 120/240 Volt, 2-2.5 Percent Taps FCAN And FCBN. Rated To 5 KVA *(26 12 13 00-0004)*		
26 12 13 00-0014	EA	10 KVA Transformer Primary 4.16 / 4.8 KV Ground Y, Secondary 120/240 Volt, 2 Taps, Oil Filled, 1 Phase	9,993.69	486.91
26 12 13 00-0015	EA	15 KVA Transformer Primary 4.16 / 4.8 KV Ground Y, Secondary 120/240 Volt, 2 Taps, Oil Filled, 1 Phase	12,177.35	608.63
26 12 13 00-0016	EA	25 KVA Transformer Primary 4.16 / 4.8 KV Ground Y, Secondary 120/240 Volt, 2 Taps, Oil Filled, 1 Phase	13,811.18	730.36
26 12 13 00-0017	EA	37.5 KVA Transformer Primary 4.16 / 4.8 KV Ground Y, Secondary 120/240 Volt, 2 Taps, Oil Filled, 1 Phase	17,958.04	912.94
26 12 13 00-0018	EA	50 KVA Transformer Primary 4.16 / 4.8 KV Ground Y, Secondary 120/240 Volt, 2 Taps, Oil Filled, 1 Phase	21,285.88	1,095.53
26 12 13 00-0019	EA	75 KVA Transformer Primary 4.16 / 4.8 KV Ground Y, Secondary 120/240 Volt, 2 Taps, Oil Filled, 1 Phase	27,613.96	1,278.12
26 12 13 00-0020	EA	100 KVA Transformer Primary 4.16 / 4.8 KV Ground Y, Secondary 120/240 Volt, 2 Taps, Oil Filled, 1 Phase	34,409.54	1,521.57
26 12 13 00-0021		Primary 13.8/14.4 KV Ground Y Secondary 120/240V 2-2.5 Percent Taps FCBN And FCAN *(26 12 13 00-0004)*		
26 12 13 00-0022	EA	10 KVA Transformer Primary 13.8 / 14.4 KV Ground Y, Secondary 120/240 Volt, 2 Taps, Oil Filled, 1 Phase	9,704.72	486.91
26 12 13 00-0023	EA	15 KVA Transformer Primary 13.8 / 14.4 KV Ground Y, Secondary 120/240 Volt, 2 Taps, Oil Filled, 1 Phase	11,145.33	608.63
26 12 13 00-0024	EA	25 KVA Transformer Primary 13.8 / 14.4 KV Ground Y, Secondary 120/240 Volt, 2 Taps, Oil Filled, 1 Phase	13,035.47	730.36
26 12 13 00-0025	EA	37.5 KVA Transformer Primary 13.8 / 14.4 KV Ground Y, Secondary 120/240 Volt, 2 Taps, Oil Filled, 1 Phase	17,779.03	912.94
26 12 13 00-0026	EA	50 KVA Transformer Primary 13.8 / 14.4 KV Ground Y, Secondary 120/240 Volt, 2 Taps, Oil Filled, 1 Phase	20,530.06	1,095.53
26 12 13 00-0027	EA	75 KVA Transformer Primary 13.8 / 14.4 KV Ground Y, Secondary 120/240 Volt, 2 Taps, Oil Filled, 1 Phase	28,091.32	1,278.12
26 12 13 00-0028	EA	100 KVA Transformer Primary 13.8 / 14.4 KV Ground Y, Secondary 120/240 Volt, 2 Taps, Oil Filled, 1 Phase	34,528.88	1,521.57
26 12 13 00-0029		Primary 13.8/14.4 KV Ground Y Secondary 240/480 Volt, 2-2.5 Percent Taps FCBN And FCAN *(26 12 13 00-0004)*		
26 12 13 00-0030	EA	10 KVA Transformer Primary 13.8 / 14.4 KV Ground Y, Secondary 240/480 Volt, 2 Taps, Oil Filled, 1 Phase	11,046.35	486.91
26 12 13 00-0031	EA	15 KVA Transformer Primary 13.8 / 14.4 KV Ground Y, Secondary 240/480 Volt, 2 Taps, Oil Filled, 1 Phase	12,528.24	608.63
26 12 13 00-0032	EA	25 KVA Transformer Primary 13.8 / 14.4 KV Ground Y, Secondary 240/480 Volt, 2 Taps, Oil Filled, 1 Phase	16,658.44	730.36
26 12 13 00-0033	EA	37.5 KVA Transformer Primary 13.8 / 14.4 KV Ground Y, Secondary 240/480 Volt, 2 Taps, Oil Filled, 1 Phase	21,004.20	912.94
26 12 13 00-0034	EA	50 KVA Transformer Primary 13.8 / 14.4 KV Ground Y, Secondary 240/480 Volt, 2 Taps, Oil Filled, 1 Phase	24,145.52	1,095.53
26 12 13 00-0035	EA	75 KVA Transformer Primary 13.8 / 14.4 KV Ground Y, Secondary 240/480 Volt, 2 Taps, Oil Filled, 1 Phase	33,438.33	1,278.12
26 12 13 00-0036	EA	100 KVA Transformer Primary 13.8 / 14.4 KV Ground Y, Secondary 240/480 Volt, 2 Taps, Oil Filled, 1 Phase	43,160.72	1,521.57
26 12 13 00-0037		Transformer Platforms *(26 12 13 00-0004)*		
26 12 13 00-0038	EA	Transformer Platforms, 75 - 167 KVA	5,287.73	822.25
26 12 13 00-0039		Primary 24.9 KV, Ground Y Secondary 240/480 Volt, 2-2.5 Percent Tops FCBN Auto FCAN *(26 12 13 00-0004)*		
26 12 13 00-0040	EA	10 KVA Transformer Primary 24.9 KV Ground Y, Secondary 240/480 Volt, 2 Taps, Oil Filled, 1 Phase	12,269.77	486.91
26 12 13 00-0041	EA	15 KVA Transformer Primary 24.9 KV Ground Y, Secondary 240/480 Volt, 2 Taps, Oil Filled, 1 Phase	13,639.07	608.63
26 12 13 00-0042	EA	25 KVA Transformer Primary 24.9 KV Ground Y, Secondary 240/480 Volt, 2 Taps, Oil Filled, 1 Phase	16,659.61	730.36
26 12 13 00-0043	EA	37.5 KVA Transformer Primary 24.9 KV Ground Y, Secondary 240/480 Volt, 2 Taps, Oil Filled, 1 Phase	21,002.77	912.94
26 12 13 00-0044	EA	50 KVA Transformer Primary 24.9 KV Ground Y, Secondary 240/480 Volt, 2 Taps, Oil Filled, 1 Phase	24,266.75	1,156.39
26 12 13 00-0045	EA	75 KVA Transformer Primary 24.9 KV Ground Y, Secondary 240/480 Volt, 2 Taps, Oil Filled, 1 Phase	33,441.90	1,278.12
26 12 13 00-0046	EA	100 KVA Transformer Primary 24.9 KV Ground Y, Secondary 240/480 Volt, 2 Taps, Oil Filled, 1 Phase	43,160.72	1,521.57
26 12 13 00-0047	EA	167 KVA Transformer Primary 24.9 KV Ground Y, Secondary 240/480 Volt, 2 Taps, Oil Filled, 1 Phase	57,898.22	1,947.62
26 12 13 00-0048	EA	250 KVA Transformer Primary 24.9 KV Ground Y, Secondary 240/480 Volt, 2 Taps, Oil Filled, 1 Phase	73,873.17	2,617.10
26 12 13 00-0049	EA	333 KVA Transformer Primary 24.9 KV Ground Y, Secondary 240/480 Volt, 2 Taps, Oil Filled, 1 Phase	86,584.15	3,043.14
26 12 13 00-0050	EA	500 KVA Transformer Primary 24.9 KV Ground Y, Secondary 240/480 Volt, 2 Taps, Oil Filled, 1 Phase	111,089.08	3,286.60
26 12 13 00-0051		Primary 4.8 KV Ground Y Secondary 120/240V 4-2.5 Percent Taps FCBN, Class A, 95 KV BIL *(26 12 13 00-0004)*		
26 12 13 00-0052	EA	10 KVA Transformer Primary 4.8 KV Ground Y, Secondary 120/240 Volt, 4 Taps, Oil Filled, 1 Phase	9,993.69	596.21
26 12 13 00-0053	EA	15 KVA Transformer Primary 4.8 KV Ground Y, Secondary 120/240 Volt, 4 Taps, Oil Filled, 1 Phase	11,929.67	745.21
26 12 13 00-0054	EA	25 KVA Transformer Primary 4.8 KV Ground Y, Secondary 120/240 Volt, 4 Taps, Oil Filled, 1 Phase	13,810.68	893.34
26 12 13 00-0055	EA	37.5 KVA Transformer Primary 4.8 KV Ground Y, Secondary 120/240 Volt, 4 Taps, Oil Filled, 1 Phase	17,959.21	1,119.51
26 12 13 00-0056	EA	50 KVA Transformer Primary 4.8 KV Ground Y, Secondary 120/240 Volt, 4 Taps, Oil Filled, 1 Phase	21,284.76	1,341.05
26 12 13 00-0057	EA	75 KVA Transformer Primary 4.8 KV Ground Y, Secondary 120/240 Volt, 4 Taps, Oil Filled, 1 Phase	30,158.34	1,561.86
26 12 13 00-0058	EA	100 KVA Transformer Primary 4.8 KV Ground Y, Secondary 120/240 Volt, 4 Taps, Oil Filled, 1 Phase	35,702.38	1,863.13

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 12 13 00-0059		Primary 4.8 KV Ground Y Secondary 120/240V 2-2.5 Percent Taps FCAN And FCBN *(26 12 13 00-0004)*		
26 12 13 00-0060	EA	10 KVA Transformer Primary 4.8 KV Ground Y, Secondary 120/240 Volt, 2 Taps, Oil Filled, 1 Phase	9,993.69	596.21
26 12 13 00-0061	EA	15 KVA Transformer Primary 4.8 KV Ground Y, Secondary 120/240 Volt, 2 Taps, Oil Filled, 1 Phase	12,177.35	745.21
26 12 13 00-0062	EA	25 KVA Transformer Primary 4.8 KV Ground Y, Secondary 120/240 Volt, 2 Taps, Oil Filled, 1 Phase	13,810.68	893.34
26 12 13 00-0063	EA	37.5 KVA Transformer Primary 4.8 KV Ground Y, Secondary 120/240 Volt, 2 Taps, Oil Filled, 1 Phase	17,959.21	1,119.51
26 12 13 00-0064	EA	50 KVA Transformer Primary 4.8 KV Ground Y, Secondary 120/240 Volt, 2 Taps, Oil Filled, 1 Phase	21,284.76	1,341.05
26 12 13 00-0065	EA	75 KVA Transformer Primary 4.8 KV Ground Y, Secondary 120/240 Volt, 2 Taps, Oil Filled, 1 Phase	27,612.43	1,561.86
26 12 13 00-0066	EA	100 KVA Transformer Primary 4.8 KV Ground Y, Secondary 120/240 Volt, 2 Taps, Oil Filled, 1 Phase	34,409.54	1,863.13
26 12 13 00-0067		Primary 7.2 To 14.4 KV Ground Y *(26 12 13 00-0004)*		
26 12 13 00-0068		Primary 7.2 To 14.4 KV Ground Y Secondary 120 / 240 V 2-2.5 Percent Taps FCBN And FCAN *(26 12 13 00-0067)*		
26 12 13 00-0069	EA	10 KVA Transformer Primary 7.2 - 14.4 KV Ground Y, Secondary 120/240 Volt, 2 Taps, Oil Filled, 1 Phase	7,822.69	486.91
26 12 13 00-0070	EA	15 KVA Transformer Primary 7.2 - 14.4 KV Ground Y, Secondary 120/240 Volt, 2 Taps, Oil Filled, 1 Phase	9,267.05	608.63
26 12 13 00-0071	EA	25 KVA Transformer Primary 7.2 - 14.4 KV Ground Y, Secondary 120/240 Volt, 2 Taps, Oil Filled, 1 Phase	10,653.43	730.36
26 12 13 00-0072	EA	37.5 KVA Transformer Primary 7.2 - 14.4 KV Ground Y, Secondary 120/240 Volt, 2 Taps, Oil Filled, 1 Phase	14,025.14	912.94
26 12 13 00-0073	EA	50 KVA Transformer Primary 7.2 - 14.4 KV Ground Y, Secondary 120/240 Volt, 2 Taps, Oil Filled, 1 Phase	17,670.80	1,095.53
26 12 13 00-0074	EA	75 KVA Transformer Primary 7.2 - 14.4 KV Ground Y, Secondary 120/240 Volt, 2 Taps, Oil Filled, 1 Phase	28,820.84	1,278.12
26 12 13 00-0075	EA	100 KVA Transformer Primary 7.2 - 14.4 KV Ground Y, Secondary 120/240 Volt, 2 Taps, Oil Filled, 1 Phase	33,065.65	1,521.57
26 12 13 00-0076		Primary 7.2 To 14.4 KV Ground Y Secondary 240 / 480 V 2-2.5 Pct Taps FCBN And FCAN *(26 12 13 00-0067)*		
26 12 13 00-0077	EA	10 KVA Transformer Primary 7.2 - 14.4 KV Ground Y, Secondary 240/480 Volt, 2 Taps, Oil Filled, 1 Phase	7,165.94	486.91
26 12 13 00-0078	EA	15 KVA Transformer Primary 7.2 - 14.4 KV Ground Y, Secondary 240/480 Volt, 2 Taps, Oil Filled, 1 Phase	8,441.43	608.63
26 12 13 00-0079	EA	25 KVA Transformer Primary 7.2 - 14.4 KV Ground Y, Secondary 240/480 Volt, 2 Taps, Oil Filled, 1 Phase	10,278.15	730.36
26 12 13 00-0080	EA	37.5 KVA Transformer Primary 7.2 - 14.4 KV Ground Y, Secondary 240/480 Volt, 2 Taps, Oil Filled, 1 Phase	13,274.57	912.94
26 12 13 00-0081	EA	50 KVA Transformer Primary 7.2 - 14.4 KV Ground Y, Secondary 240/480 Volt, 2 Taps, Oil Filled, 1 Phase	16,638.78	1,095.53
26 12 13 00-0082	EA	75 KVA Transformer Primary 7.2 - 14.4 KV Ground Y, Secondary 240/480 Volt, 2 Taps, Oil Filled, 1 Phase	25,068.02	1,278.12
26 12 13 00-0083	EA	100 KVA Transformer Primary 7.2 - 14.4 KV Ground Y, Secondary 240/480 Volt, 2 Taps, Oil Filled, 1 Phase	29,312.84	1,521.57
26 12 16		**Dry-Type, Medium-Voltage Transformers** *(26 12)*		
26 12 16 00-0001		Removal and Relocation of Transformers *(26 12 16)*		
26 12 16 00-0002	EA	Removal And Relocation Of Up To 37.5 KVA "Dry Type" Transformer	483.79	
26 12 16 00-0003	EA	Removal And Relocation Of >37.5 To 112.5 KVA "Dry Type" Transformer	2,150.15	
26 12 19		**Pad-Mounted, Liquid-Filled, Medium-Voltage Transformers** *(26 12)*		
26 12 19 00-0001		Single Phase Pad Mounted Oil Filled Distribution Transformers *(26 12 19)* Note: Designed for residential and multi-family buildings. UL listed.		
26 12 19 00-0002		Mini Pak - Single Phase KVA 25 Thru 167 - 95 KV BIL.- Oil Filled *(26 12 19 00-0001)* Note: Self actuating pressure relief device, taps, 4-1/2 % below or 2-1/2 % above and below. Designed for loop feed grounded wye distribution system.		
26 12 19 00-0003		Primary, 4.16/4.8 KV Ground Y Or Delta *(26 12 19 00-0002)* Note: 2.4 To 24.94 KV ground Y / 14.4 KV secondary - 240/120 Volt, 480/240 Volt, 277 V. Rated to 5 KVA.		
26 12 19 00-0004	EA	25 KVA, Primary 4.16 / 4.8 KV Ground Y / 2.4 - 24.94 KV Ground Y / 14.4 KV, Secondary 240/120 Volt, 480/240 Volt, 277 Volt	24,525.93	582.87
26 12 19 00-0005	EA	37.5 KVA, Primary 4.16 / 4.8 KV Ground Y / 2.4 - 24.94 KV Ground Y / 14.4 KV, Secondary 240/120 Volt, 480/240 Volt, 277 Volt	26,528.99	699.45
26 12 19 00-0006	EA	50 KVA, Primary 4.16 / 4.8 KV Ground Y / 2.4 - 24.94 KV Ground Y / 14.4 KV, Secondary 240/120 Volt, 480/240 Volt, 277 Volt	31,666.56	816.02
26 12 19 00-0007	EA	75 KVA, Primary 4.16 / 4.8 KV Ground Y / 2.4 - 24.94 KV Ground Y / 14.4 KV, Secondary 240/120 Volt, 480/240 Volt, 277 Volt	39,504.56	874.30
26 12 19 00-0008	EA	100 KVA, Primary 4.16 / 4.8 KV Ground Y / 2.4 - 24.94 KV Ground Y / 14.4 KV, Secondary 240/120 Volt, 480/240 Volt, 277 Volt	44,991.68	932.60
26 12 19 00-0009	EA	167 KVA, Primary 4.16 / 4.8 KV Ground Y / 2.4 - 24.94 KV Ground Y / 14.4 KV, Secondary 240/120 Volt, 480/240 Volt, 277 Volt	58,869.18	1,224.03
26 12 19 00-0010		Factory Modifications Material Cost Only *(26 12 19 00-0002)*		
26 12 19 00-0011	EA	Loadbreaker Current Limiting Fuse Factory Modifications	5,593.47	
26 12 19 00-0012	EA	Loadbreaker Oil Switch, 2 Position Factory Modifications	5,877.20	
26 12 19 00-0013	EA	Loadbreaker Inserts, Factory Modifications	6,464.92	
26 12 19 00-0014		Distribution - Single Phase Multiple Building Transformer *(26 12 19 00-0001)* Note: KVA 25 to 250, KVA BIL-95, 125, 150 standard features. Oil filled, self-actuating pressure relief device, lighting arrester mounted. Pad HV/LV barrier, etc. with taps 4-1/2 % below or 2-1/2 % above and below.		
26 12 19 00-0015		Primary, 4.16/4.8 KVA Ground Y Or Delta *(26 12 19 00-0014)* Note: 2.4 To 34.5 KV ground Y / 19.9 KV secondary - 240/120 V, 120/240 V, 240/480 V, 480/240 V, 277V. Rated to 5 KVA.		
26 12 19 00-0016	EA	25 KVA, Primary 4.16 / 4.8 KV Ground Y / 2.4 - 24.94 KV Ground Y / 14.4 KV, Secondary 240/120 Volt, 480/240 Volt, 277 Volt	31,340.97	582.87

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 12 19 00-0017	EA	37.5 KVA, Primary 4.16 / 4.8 KV Ground Y / 2.4 - 24.94 KV Ground Y / 14.4 KV, Secondary 240/120 Volt, 480/240 Volt, 277 Volt	35,100.19	582.87
26 12 19 00-0018	EA	50 KVA, Primary 4.16 / 4.8 KV Ground Y / 2.4 - 24.94 KV Ground Y / 14.4 KV, Secondary 240/120 Volt, 480/240 Volt, 277 Volt	37,548.87	798.53
26 12 19 00-0019	EA	75 KVA, Primary 4.16 / 4.8 KV Ground Y / 2.4 - 24.94 KV Ground Y / 14.4 KV, Secondary 240/120 Volt, 480/240 Volt, 277 Volt	47,230.41	798.53
26 12 19 00-0020	EA	100 KVA, Primary 4.16 / 4.8 KV Ground Y / 2.4 - 24.94 KV Ground Y / 14.4 KV, Secondary 240/120 Volt, 480/240 Volt, 277 Volt	53,080.01	1,049.17
26 12 19 00-0021	EA	167 KVA, Primary 4.16 / 4.8 KV Ground Y / 2.4 - 24.94 KV Ground Y / 14.4 KV, Secondary 240/120 Volt, 480/240 Volt, 277 Volt	63,563.87	1,049.17
26 12 19 00-0022	EA	250 KVA, Primary 4.16 / 4.8 KV Ground Y / 2.4 - 24.94 KV Ground Y / 14.4 KV, Secondary 240/120 Volt, 480/240 Volt, 277 Volt	103,757.62	1,457.18
26 12 19 00-0023		**Factory Modifications Material Cost Only** *(26 12 19 00-0014)*		
26 12 19 00-0024	EA	Loadbreaker Current Limiting Fuse Factory Modifications	7,457.96	
26 12 19 00-0025	EA	Lightning Arrestors, Factory Modifications	1,889.64	
26 12 19 00-0026	EA	Loadbreaker Oil Switch, 2 Position Factory Modifications	5,877.20	
26 12 19 00-0027	EA	Loop Feed Air Switch, Factory Modifications	9,565.65	
26 12 19 00-0028	EA	Loadbreaker Inserts (Two), Factory Modifications	2,553.54	
26 12 19 00-0029	EA	Bay-O-Net Fuse 25 Thru 167 KVA Factory Modifications	2,209.02	
26 12 19 00-0030		**Primary, 12.47 KV Ground Y Or Delta** *(26 12 19 00-0014)* Note: 7.2 To 34.5 KV ground Y / 19.9 KV secondary - 240/120 V, 120/240 V, 240/480 V, 480/240 V, 277V. Rated to 5 KVA.		
26 12 19 00-0031	EA	25 KVA, Primary 12.47 KV Ground Y / 7.2 - 34.5 KV Ground Y / 19.9 KV, Secondary 240/120 Volt, 480/240 Volt, 277 Volt	34,089.67	582.87
26 12 19 00-0032	EA	37.5 KVA, Primary 12.47 KV Ground Y / 7.2 - 34.5 KV Ground Y / 19.9 KV, Secondary 240/120 Volt, 480/240 Volt, 277 Volt	36,029.89	582.87
26 12 19 00-0033	EA	50 KVA, Primary 12.47 KV Ground Y / 7.2 - 34.5 KV Ground Y / 19.9 KV, Secondary 240/120 Volt, 480/240 Volt, 277 Volt	37,189.33	798.53
26 12 19 00-0034	EA	75 KVA, Primary 12.47 KV Ground Y / 7.2 - 34.5 KV Ground Y / 19.9 KV, Secondary 240/120 Volt, 480/240 Volt, 277 Volt	45,056.65	798.53
26 12 19 00-0035	EA	100 KVA, Primary 12.47 KV Ground Y / 7.2 - 34.5 KV Ground Y / 19.9 KV, Secondary 240/120 Volt, 480/240 Volt, 277 Volt	57,621.85	1,049.17
26 12 19 00-0036	EA	167 KVA, Primary 12.47 KV Ground Y / 7.2 - 34.5 KV Ground Y / 19.9 KV, Secondary 240/120 Volt, 480/240 Volt, 277 Volt	71,602.79	1,049.28
26 12 19 00-0037	EA	250 KVA, Primary 12.47 KV Ground Y / 7.2 - 34.5 KV Ground Y / 19.9 KV, Secondary 240/120 Volt, 480/240 Volt, 277 Volt	90,957.77	1,457.18
26 12 19 00-0038		**Oil Filled Distribution Transformer Single Phase Cluster Mounted** *(26 12 19 00-0001)* Note: Conventional type.		
26 12 19 00-0039		**13.8/14.4 KV Ground Y Or Delta Primary 120/240V** *(26 12 19 00-0038)* Note: 2.5 Taps FCBN and FCAN.		
26 12 19 00-0040	EA	10 KVA, 13.8 - 14.4 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	22,590.94	415.91
26 12 19 00-0041	EA	37.5 KVA, 13.8 - 14.4 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	27,803.25	584.88
26 12 19 00-0042	EA	50 KVA, 13.8 - 14.4 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	42,770.29	935.81
26 12 19 00-0043	EA	100 KVA, 13.8 - 14.4 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	77,736.87	935.81
26 12 19 00-0044	EA	167 KVA, 13.8 - 14.4 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	107,458.19	1,533.69
26 12 19 00-0045	EA	250 KVA, 13.8 - 14.4 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	145,281.69	1,533.69
26 12 19 00-0046		**Oil Filled Distribution Transformer Single Phase** *(26 12 19 00-0001)*		
26 12 19 00-0047		**7.2 KV Primary, 120/240 Volt Secondary** *(26 12 19 00-0046)*		
26 12 19 00-0048	EA	10 KVA, 7.2 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	21,859.10	441.91
26 12 19 00-0049	EA	15 KVA, 7.2 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	23,836.70	441.91
26 12 19 00-0050	EA	25 KVA, 7.2 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	28,200.26	623.87
26 12 19 00-0051	EA	37.5 KVA, 7.2 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	36,140.65	623.87
26 12 19 00-0052	EA	50 KVA, 7.2 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	41,594.00	844.83
26 12 19 00-0053	EA	100 KVA, 7.2 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	75,867.84	1,299.74
26 12 19 00-0054	EA	167 KVA, 7.2 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	105,994.52	1,299.74
26 12 19 00-0055	EA	250 KVA, 7.2 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	143,022.38	1,624.67
26 12 19 00-0056		**7.2 KV Primary, 240/480 Volt Secondary** *(26 12 19 00-0046)*		
26 12 19 00-0057	EA	10 KVA, 7.2 KV Primary, 240/480 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	21,859.10	441.91
26 12 19 00-0058	EA	15 KVA, 7.2 KV Primary, 240/480 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	23,837.45	441.91
26 12 19 00-0059	EA	25 KVA, 7.2 KV Primary, 240/480 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	28,200.26	623.87
26 12 19 00-0060	EA	37.5 KVA, 7.2 KV Primary, 240/480 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	36,140.65	623.87
26 12 19 00-0061	EA	50 KVA, 7.2 KV Primary, 240/480 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	41,594.00	844.83
26 12 19 00-0062	EA	75 KVA, 7.2 KV Primary, 240/480 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	64,957.88	1,143.77
26 12 19 00-0063	EA	100 KVA, 7.2 KV Primary, 240/480 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	75,867.84	1,143.77
26 12 19 00-0064	EA	167 KVA, 7.2 KV Primary, 240/480 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	105,994.52	1,442.70
26 12 19 00-0065	EA	250 KVA, 7.2 KV Primary, 240/480 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	143,022.38	1,624.67
26 12 19 00-0066		**2.4 KV Primary, 277 Volt Secondary** *(26 12 19 00-0046)*		
26 12 19 00-0067	EA	10 KVA, 2.4 KV Primary, 277 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	24,155.67	441.91

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 12 19 00-0068	EA	15 KVA, 2.4 KV Primary, 277 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	26,339.50	441.91
26 12 19 00-0069	EA	25 KVA, 2.4 KV Primary, 277 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	31,167.61	623.87
26 12 19 00-0070	EA	37.5 KVA, 2.4 KV Primary, 277 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	39,931.33	623.87
26 12 19 00-0071	EA	50 KVA, 2.4 KV Primary, 277 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	45,952.87	844.83
26 12 19 00-0072	EA	75 KVA, 2.4 KV Primary, 277 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	71,627.97	1,143.77
26 12 19 00-0073	EA	100 KVA, 2.4 KV Primary, 277 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	83,893.46	1,143.77
26 12 19 00-0074	EA	167 KVA, 2.4 KV Primary, 277 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	117,259.16	1,442.70
26 12 19 00-0075	EA	250 KVA, 2.4 KV Primary, 277 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	158,292.94	1,624.67
26 12 19 00-0076		**2.4 KV Primary, 120/240 Volt Secondary** *(26 12 19 00-0046)*		
26 12 19 00-0077	EA	10 KVA, 2.4 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	21,859.10	441.91
26 12 19 00-0078	EA	15 KVA, 2.4 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	23,836.70	441.91
26 12 19 00-0079	EA	25 KVA, 2.4 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	28,200.26	848.85
26 12 19 00-0080	EA	37.5 KVA, 2.4 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	36,140.65	1,143.77
26 12 19 00-0081	EA	50 KVA, 2.4 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	41,594.00	844.83
26 12 19 00-0082	EA	75 KVA, 2.4 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	64,777.66	1,143.77
26 12 19 00-0083	EA	100 KVA, 2.4 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	75,852.84	1,143.77
26 12 19 00-0084		**2.4 KV Primary, 240/480 Volt Secondary** *(26 12 19 00-0046)*		
26 12 19 00-0085	EA	10 KVA, 2.4 KV Primary, 240/480 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	21,859.10	441.91
26 12 19 00-0086	EA	15 KVA, 2.4 KV Primary, 240/480 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	23,836.70	441.91
26 12 19 00-0087	EA	25 KVA, 2.4 KV Primary, 240/480 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	28,200.26	623.87
26 12 19 00-0088	EA	37.5 KVA, 2.4 KV Primary, 240/480 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	36,140.65	623.87
26 12 19 00-0089	EA	50 KVA, 2.4 KV Primary, 240/480 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	41,594.00	844.83
26 12 19 00-0090	EA	75 KVA, 2.4 KV Primary, 240/480 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	64,777.66	1,143.77
26 12 19 00-0091	EA	100 KVA, 2.4 KV Primary, 240/480 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	75,852.84	1,143.77
26 12 19 00-0092		**2.4 KV x 7.2 KV Primary, 120/240 Volt Secondary** *(26 12 19 00-0046)*		
26 12 19 00-0093	EA	10 KVA, 2.4 KV x 7.2 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	18,289.78	454.90
26 12 19 00-0094	EA	15 KVA, 2.4 KV x 7.2 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	19,805.59	506.90
26 12 19 00-0095	EA	25 KVA, 2.4 KV x 7.2 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	24,308.40	558.89
26 12 19 00-0096	EA	37 KVA, 2.4 KV x 7.2 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	30,642.50	779.84
26 12 19 00-0097	EA	50 KVA, 2.4 KV x 7.2 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	33,989.99	909.82
26 12 19 00-0098	EA	75 KVA, 2.4 KV x 7.2 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	47,799.44	1,065.78
26 12 19 00-0099	EA	100 KVA, 2.4 KV x 7.2 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	57,800.90	1,221.75
26 12 19 00-0100	EA	167 KVA, 2.4 KV x 7.2 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	92,022.08	1,559.69
26 12 19 00-0101	EA	250 KVA, 2.4 KV x 7.2 KV Primary, 120/240 Volt Secondary, Oil Filled Distribution Transformer, 1 Phase	128,914.83	1,754.64
26 12 19 00-0102		**3 Phase Pad Mounted Oil Filled Distribution Transformers** *(26 12 19)*		
26 12 19 00-0103		**Primary 4.16/4.8 KV Ground Y Secondary 120/240 Volt** *(26 12 19 00-0102)*		
		Note: 4-2.5 Percent taps FCBN, Class A, 95 KV BIL.		
26 12 19 00-0104	EA	112.5 KVA Transformer Primary 4.16 / 4.8 KV Ground Y, Secondary 120/240 Volt, 4 Taps, Oil Filled, 3 Phase	36,476.14	1,704.16
26 12 19 00-0105	EA	150 KVA Transformer Primary 4.16 / 4.8 KV Ground Y, Secondary 120/240 Volt, 4 Taps, Oil Filled, 3 Phase	46,202.29	1,825.89
26 12 19 00-0106	EA	225 KVA Transformer Primary 4.16 / 4.8 KV Ground Y, Secondary 120/240 Volt, 4 Taps, Oil Filled, 3 Phase	61,521.68	2,312.79
26 12 19 00-0107	EA	300 KVA Transformer Primary 4.16 / 4.8 KV Ground Y, Secondary 120/240 Volt, 4 Taps, Oil Filled, 3 Phase	80,488.59	2,921.42
26 12 19 00-0108	EA	500 KVA Transformer Primary 4.16 / 4.8 KV Ground Y, Secondary 120/240 Volt, 4 Taps, Oil Filled, 3 Phase	120,365.41	3,286.60
26 12 19 00-0109	EA	750 KVA Transformer Primary 4.16 / 4.8 KV Ground Y, Secondary 120/240 Volt, 4 Taps, Oil Filled, 3 Phase	150,818.63	4,382.13
26 12 19 00-0110		**Pad Mounted Commercial Type Distribution Transformers UL Listed** *(26 12 19)*		
26 12 19 00-0111		**Distribution 3 Phase Oil Filled Transformer** *(26 12 19 00-0110)*		
		Note: Designed for loads as shopping centers, institutions, and industrial plants with underground distribution. KVA-75 thru 1000, 3 phase 95 thru 150 KV BIL standard features. With taps 4-1/2 percent below - 2-1/2 percent above and below.		
26 12 19 00-0112		**Primary 4.16 / 4.8 KV, Ground Y / 13.8 - 14.4 KV, Secondary 480 Y /277 Volt, 480 Volt, 95 KV BIL** *(26 12 19 00-0111)*		
		Note: Rated to 5 KVA.		
26 12 19 00-0113	EA	75 KVA, Primary 4.16 / 4.8 KV Ground Y / 13.8 - 14.4 KV, Secondary 480 Y /277 Volt, 480 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	55,740.27	1,398.89
26 12 19 00-0114	EA	112.5 KVA, Primary 4.16 / 4.8 KV Ground Y / 13.8 - 14.4 KV, Secondary 480 Y /277 Volt, 480 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	62,720.98	1,398.89
26 12 19 00-0115	EA	150 KVA, Primary 4.16 / 4.8 KV Ground Y / 13.8 - 14.4 KV, Secondary 480 Y /277 Volt, 480 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	71,846.64	2,413.09
26 12 19 00-0116	EA	225 KVA, Primary 4.16 / 4.8 KV Ground Y / 13.8 - 14.4 KV, Secondary 480 Y /277 Volt, 480 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	84,826.45	2,413.09
26 12 19 00-0117	EA	300 KVA, Primary 4.16 / 4.8 KV Ground Y / 13.8 - 14.4 KV, Secondary 480 Y /277 Volt, 480 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	95,136.99	3,613.80
26 12 19 00-0118	EA	500 KVA, Primary 4.16 / 4.8 KV Ground Y / 13.8 - 14.4 KV, Secondary 480 Y /277 Volt, 480 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	129,680.83	4,779.55
26 12 19 00-0119	EA	750 KVA, Primary 4.16 / 4.8 KV Ground Y / 13.8 - 14.4 KV, Secondary 480 Y /277 Volt, 480 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	172,729.04	6,061.87
26 12 19 00-0120	EA	1,000 KVA, Primary 4.16 / 4.8 KV Ground Y / 13.8 - 14.4 KV, Secondary 480 Y /277 Volt, 480 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	199,819.73	7,344.18

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 12 19 00-0121		Primary 4.16 / 4.8 KV, Ground Y / 13.8 - 14.4 KV, Secondary 208 Y / 120 Volt, 95 BIL *(26 12 19 00-0111)*		
		Note: Rated to 5 KVA.		
26 12 19 00-0122	EA	75 KVA, Primary 4.16 / 4.8 KV Ground Y / 13.8 - 14.4 KV, Secondary 208 Y / 120 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	55,740.27	1,398.89
26 12 19 00-0123	EA	112.5 KVA, Primary 4.16 / 4.8 KV Ground Y / 13.8 - 14.4 KV, Secondary 208 Y / 120 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	62,720.98	1,398.89
26 12 19 00-0124	EA	150 KVA, Primary 4.16 / 4.8 KV Ground Y / 13.8 - 14.4 KV, Secondary 208 Y / 120 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	71,846.64	2,413.09
26 12 19 00-0125	EA	225 KVA, Primary 4.16 / 4.8 KV Ground Y / 13.8 - 14.4 KV, Secondary 208 Y / 120 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	85,231.91	2,413.09
26 12 19 00-0126	EA	300 KVA, Primary 4.16 / 4.8 KV Ground Y / 13.8 - 14.4 KV, Secondary 208 Y / 120 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	96,203.50	3,613.80
26 12 19 00-0127	EA	500 KVA, Primary 4.16 / 4.8 KV Ground Y / 13.8 - 14.4 KV, Secondary 208 Y / 120 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	129,933.18	4,779.55
26 12 19 00-0128	EA	750 KVA, Primary 4.16 / 4.8 KV Ground Y / 13.8 - 14.4 KV, Secondary 208 Y / 120 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	194,050.55	6,061.87
26 12 19 00-0129	EA	1,000 KVA, Primary 4.16 / 4.8 KV Ground Y / 13.8 - 14.4 KV, Secondary 208 Y / 120 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	204,376.67	7,344.18
26 12 19 00-0130		Factory Modifications *(26 12 19 00-0111)*		
		Note: For use with series 4100 3 phase transformers.		
26 12 19 00-0131	EA	Current Limiting Fuse 95 KV Series 4100, 3 Phase Transformer, Factory Modification	4,266.07	
26 12 19 00-0132	EA	Lightning Arrestors 9-10 KV Series 4100, 3 Phase Transformer, Factory Modification	693.71	
26 12 19 00-0133	EA	Loadbreaker Oil Switch, 2 Position Series 4100, 3 Phase Transformer, Factory Modification	2,774.84	
26 12 19 00-0134	EA	Loop Feed Air Switch Series 4100, 3 Phase Transformer, Factory Modification	7,994.47	
26 12 19 00-0135	EA	Loadbreaker Inserts Series 4100, 3 Phase Transformer, Factory Modification	979.35	
26 12 19 00-0136	EA	Lightning Arrestors, 15 KV Series 4100, 3 Phase Transformer, Factory Modification	775.32	
26 12 19 00-0137		Accessories For Transformer Liquid Containment Area *(26 12 19 00-0111)*		
		Note: Reinforced concrete curb with 6" slab.		
26 12 19 00-0138	EA	Containment Area For 75 KVA	9,521.38	2,503.38
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1,668.95*	
26 12 19 00-0139	EA	Containment Area For 112.5 KVA	9,521.38	2,503.38
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1,668.95*	
26 12 19 00-0140	EA	Containment Area For 150 KVA	9,521.38	2,503.38
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1,668.95*	
26 12 19 00-0141	EA	Containment Area For 225 KVA	9,521.38	2,503.38
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1,668.95*	
26 12 19 00-0142	EA	Containment Area For 300 KVA	9,512.41	2,503.38
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1,666.26*	
26 12 19 00-0143	EA	Containment Area For 500 KVA	9,512.41	2,503.38
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1,666.26*	
26 12 19 00-0144	EA	Containment Area For 750 KVA	9,626.67	2,503.38
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1,666.26*	
26 12 19 00-0145	EA	Containment Area For 1,000 KVA	11,283.41	2,503.38
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1,666.26*	
26 12 19 00-0146		Primary 4.16 / 4.8 KV, Ground Y / 7.2 - 14.4 KV, Secondary 480 Y / 277 Volt, 480 Volt, 95 KV BIL *(26 12 19 00-0111)*		
		Note: Rated to 5 KVA.		
26 12 19 00-0147	EA	45 KVA, Primary 4.16 / 4.8 KV Ground Y / 7.2 - 14.4 KV, Secondary 480 Y / 277 Volt, 480 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	24,741.38	1,398.89
26 12 19 00-0148	EA	75 KVA, Primary 4.16 / 4.8 KV Ground Y / 7.2 - 14.4 KV, Secondary 480 Y / 277 Volt, 480 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	27,189.76	1,398.89
26 12 19 00-0149	EA	112.5 KVA, Primary 4.16 / 4.8 KV Ground Y / 7.2 - 14.4 KV, Secondary 480 Y / 277 Volt, 480 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	28,822.02	1,398.89
26 12 19 00-0150	EA	150 KVA, Primary 4.16 / 4.8 KV Ground Y / 7.2 - 14.4 KV, Secondary 480 Y / 277 Volt, 480 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	33,718.79	1,398.89
26 12 19 00-0151	EA	225 KVA, Primary 4.16 / 4.8 KV Ground Y / 7.2 - 14.4 KV, Secondary 480 Y / 277 Volt, 480 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	35,474.28	2,098.34
26 12 19 00-0152	EA	300 KVA, Primary4.16 / 4.8 KV Ground Y / 7.2 - 14.4 KV, Secondary 480 Y / 277 Volt, 480 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	37,106.54	2,098.34
26 12 19 00-0153	EA	500 KVA, Primary 4.16 / 4.8 KV Ground Y / 7.2 - 14.4 KV, Secondary 480 Y / 277 Volt, 480 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	56,693.62	2,098.34
26 12 19 00-0154	EA	750 KVA, Primary 4.16 / 4.8 KV Ground Y / 7.2 - 14.4 KV, Secondary 480 Y / 277 Volt, 480 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	72,334.34	2,797.78
26 12 19 00-0155	EA	1,000 KVA, Primary 4.16 / 4.8 KV Ground Y / 7.2 - 14.4 KV, Secondary 480 Y / 277 Volt, 480 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	93,553.69	2,797.78
26 12 19 00-0156		Primary 4.16 / 4.8 KV, Ground Y / 7.2 - 14.4 KV, Secondary 208 Y / 120 Volt, 95 BIL *(26 12 19 00-0111)*		
		Note: Rated to 5 KVA.		
26 12 19 00-0157	EA	45 KVA, Primary 4.16 / 4.8 KV Ground Y / 7.2 - 14.4 KV, Secondary 208 Y / 120 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	25,557.51	1,398.89
26 12 19 00-0158	EA	75 KVA, Primary 4.16 / 4.8 KV Ground Y / 7.2 - 14.4 KV, Secondary 208 Y / 120 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	28,822.02	1,398.89

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 12 19 00-0159	EA	112.5 KVA, Primary 4.16 / 4.8 KV Ground Y / 7.2 - 14.4 KV, Secondary 208 Y / 120 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	29,638.15	1,398.89
26 12 19 00-0160	EA	150 KVA, Primary 4.16 / 4.8 KV Ground Y / 7.2 - 14.4 KV, Secondary 208 Y / 120 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	30,454.27	1,398.89
26 12 19 00-0161	EA	225 KVA, Primary 4.16 / 4.8 KV Ground Y / 7.2 - 14.4 KV, Secondary 208 Y / 120 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	35,474.28	2,098.34
26 12 19 00-0162	EA	300 KVA, Primary 4.16 / 4.8 KV Ground Y / 7.2 - 14.4 KV, Secondary 208 Y / 120 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	38,738.79	2,098.34
26 12 19 00-0163	EA	500 KVA, Primary 4.16 / 4.8 KV Ground Y / 7.2 - 14.4 KV, Secondary 208 Y / 120 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	56,693.62	2,098.34
26 12 19 00-0164	EA	750 KVA, Primary 4.16 / 4.8 KV Ground Y / 7.2 - 14.4 KV, Secondary 208 Y / 120 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	73,150.47	2,797.78
26 12 19 00-0165	EA	1,000 KVA, Primary 4.16 / 4.8 KV Ground Y / 7.2 - 14.4 KV, Secondary 208 Y / 120 Volt, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	93,553.69	2,797.78

26 12 19 00-0166 Primary 5 KV Or 15 KV, Secondary 277/480 Volt *(26 12 19 00-0110)*

Note: 4-2.5 Percent taps FCAN and FCBN. Pad mounted.

26 12 19 00-0167	EA	150 KVA Primary 5 KV Or 15 KV, Secondary 277/480 Volt, 4 Taps, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	89,159.18	1,874.57
26 12 19 00-0168	EA	225 KVA Primary 5 KV Or 15 KV, Secondary 277/480 Volt, 4 Taps, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	97,020.30	2,212.97
26 12 19 00-0169	EA	300 KVA Primary 5 KV Or 15 KV, Secondary 277/480 Volt, 4 Taps, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	108,442.51	2,704.75
26 12 19 00-0170	EA	500 KVA Primary 5 KV Or 15 KV, Secondary 277/480 Volt, 4 Taps, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	129,560.12	3,043.14
26 12 19 00-0171	EA	750 KVA Primary 5 KV Or 15 KV, Secondary 277/480 Volt, 4 Taps, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	160,516.82	3,203.21
26 12 19 00-0172	EA	1,000 KVA Primary 5 KV Or 15 KV, Secondary 277/480 Volt, 4 Taps, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	192,253.34	4,680.35
26 12 19 00-0173	EA	1,500 KVA Primary 5 KV Or 15 KV, Secondary 277/480 Volt, 4 Taps, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	226,830.81	5,295.07
26 12 19 00-0174	EA	2,000 KVA Primary 5 KV Or 15 KV, Secondary 277/480 Volt, 4 Taps, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	285,114.74	6,086.29
26 12 19 00-0175	EA	2,500 KVA Primary 5 KV Or 15 KV, Secondary 277/480 Volt, 4 Taps, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	316,296.15	6,390.61
26 12 19 00-0176	EA	3,000 KVA Primary 5 KV Or 15 KV, Secondary 277/480 Volt, 4 Taps, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	332,681.36	7,121.20
26 12 19 00-0177	EA	3,750 KVA Primary 5 KV Or 15 KV, Secondary 277/480 Volt, 4 Taps, 3 Phase, Pad Mounted, Oil Filled, Commercial Type Distribution TransformersTransformer	383,780.47	7,608.11

26 12 19 00-0178 Pad Mounted Transformer 15 KV - 480 Volt, Oil Filled *(26 12 19 00-0110)*

26 12 19 00-0179	EA	1,500 KVA, 15 KV - 480 Volt, 3 Phase, Pad Mounted, Oil Filled, TransformersTransformer	162,885.78	5,195.14
26 12 19 00-0180	EA	2,000 KVA, 15 KV - 480 Volt, 3 Phase, Pad Mounted, Oil Filled, TransformersTransformer	201,352.56	5,974.43
26 12 19 00-0181	EA	2,500 KVA, 15 KV - 480 Volt, 3 Phase, Pad Mounted, Oil Filled, TransformersTransformer	230,057.05	6,288.83
26 12 19 00-0182	EA	3,000 KVA, 15 KV - 480 Volt, 3 Phase, Pad Mounted, Oil Filled, TransformersTransformer	243,583.94	7,028.73
26 12 19 00-0183	EA	3,750 KVA, 15 KV - 480 Volt, 3 Phase, Pad Mounted, Oil Filled, TransformersTransformer	274,488.88	7,241.71

26 12 19 00-0184 Silicone Filled Distribution Transformers, 3 Phase *(26 12 19 00-0110)*

Note: Primary 5 KV or 15 KV, secondary 277/480 V, 4-2.5 percent taps FCAN and FCBN. Pad mounted.

26 12 19 00-0185	EA	225 KVA Primary 5 KV Or 15 KV, Secondary 277/480 Volt, 4 Taps, Silicon Filled, 3 Phase, Pad Mounted, Oil Filled, TransformersTransformer	156,491.54	2,212.97
26 12 19 00-0186	EA	300 KVA Primary 5 KV Or 15 KV, Secondary 277/480 Volt, 4 Taps, Silicon Filled, 3 Phase, Pad Mounted, Oil Filled, TransformersTransformer	167,195.37	2,704.75
26 12 19 00-0187	EA	500 KVA Primary 5 KV Or 15 KV, Secondary 277/480 Volt, 4 Taps, Silicon Filled, 3 Phase, Pad Mounted, Oil Filled, TransformersTransformer	196,182.06	3,043.14
26 12 19 00-0188	EA	750 KVA Primary 5 KV Or 15 KV, Secondary 277/480 Volt, 4 Taps, Silicon Filled, 3 Phase, Pad Mounted, Oil Filled, TransformersTransformer	238,942.38	3,203.21
26 12 19 00-0189	EA	1,000 KVA Primary 5 KV Or 15 KV, Secondary 277/480 Volt, 4 Taps, Silicon Filled, 3 Phase, Pad Mounted, Oil Filled, TransformersTransformer	284,339.26	4,680.35
26 12 19 00-0190	EA	1,500 KVA Primary 5 KV Or 15 KV, Secondary 277/480 Volt, 4 Taps, Silicon Filled, 3 Phase, Pad Mounted, Oil Filled, TransformersTransformer	363,301.89	5,295.07
26 12 19 00-0191	EA	2,000 KVA Primary 5 KV Or 15 KV, Secondary 277/480 Volt, 4 Taps, Silicon Filled, 3 Phase, Pad Mounted, Oil Filled, TransformersTransformer	442,761.60	6,086.29
26 12 19 00-0192	EA	2,500 KVA Primary 5 KV Or 15 KV, Secondary 277/480 Volt, 4 Taps, Silicon Filled, 3 Phase, Pad Mounted, Oil Filled, TransformersTransformer	507,907.99	6,390.61

26 13 Medium-Voltage Switchgear *(26 10)*

26 13 16 Medium-Voltage Fusible Interrupter Switchgear *(26 13)*

26 13 16 00-0001 "Switchyard", Substation Secondary Distribution Section *(26 13 16)*

Note: Medium voltage, metal clad switchgear, 3 phase, 3 wire with ground. Includes breaker element, housing, control switch two lamps - 3 cable terminals.

26 13 16 00-0002 4.16 Or 4.8 KV Switchgear Sections, With Air Circuit Breaker, Secondary Distribution Section *(26 13 16 00-0001)*

26 13 16 00-0003	EA	1,200 Amperes, 75 MVA, 4.16 Or 4.8 KV Switchgear, With Air Circuit Breaker, Secondary Distribution Section	24,822.65	1,351.72
		For Weatherproofing, Add	*5,271.44*	
26 13 16 00-0004	EA	1,200 Amperes, 250 MVA, 4.16 Or 4.8 KV Switchgear, With Air Circuit Breaker, Secondary Distribution Section	26,174.27	1,351.72
		For Weatherproofing, Add	*5,568.79*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 13 16 00-0005	EA	1,200 Amperes, 350 MVA, 4.16 Or 4.8 KV Switchgear, With Air Circuit Breaker, Secondary Distribution Section	36,043.83	1,722.15
		For Weatherproofing, Add	*7,701.62*	
26 13 16 00-0006	EA	2,000 Amperes, 250 MVA, 4.16 Or 4.8 KV Switchgear, With Air Circuit Breaker, Secondary Distribution Section	49,804.97	1,722.15
		For Weatherproofing, Add	*10,700.08*	
26 13 16 00-0007	EA	2,000 Amperes, 350 MVA, 4.16 Or 4.8 KV Switchgear, With Air Circuit Breaker, Secondary Distribution Section	72,371.02	2,079.57
		For Weatherproofing, Add	*15,630.02*	
26 13 16 00-0008	EA	3,000 Amperes, 350 MVA, 4.16 Or 4.8 KV Switchgear, With Air Circuit Breaker, Secondary Distribution Section	65,530.20	2,079.57
		For Weatherproofing, Add	*14,110.31*	

26 13 16 00-0009 7.2 KV Switchgear Sections, With Air Circuit Breaker, Secondary Distribution Section *(26 13 16 00-0001)*

26 13 16 00-0010	EA	1,200 Amperes, 500 MVA, 7.2 KV Switchgear, With Air Circuit Breaker, Secondary Distribution Section	37,985.43	1,559.69
		For Weatherproofing, Add	*8,147.64*	
26 13 16 00-0011	EA	2,000 Amperes, 500 MVA, 7.2 KV Switchgear, With Air Circuit Breaker, Secondary Distribution Section	46,435.26	1,949.60
		For Weatherproofing, Add	*9,942.54*	
26 13 16 00-0012	EA	3,000 Amperes, 500 MVA, 7.2 KV Switchgear, With Air Circuit Breaker, Secondary Distribution Section	66,122.92	2,339.52
		For Weatherproofing, Add	*14,227.81*	

26 13 16 00-0013 13.8 KV Switchgear Sections, With Air Circuit Breaker, Secondary Distribution Section *(26 13 16 00-0001)*

26 13 16 00-0014	EA	1,200 Amperes, 500 MVA, 13.8 KV Switchgear, With Air Circuit Breaker, Secondary Distribution Section	36,317.84	1,559.69
		For Weatherproofing, Add	*7,763.60*	
26 13 16 00-0015	EA	1,200 Amperes, 750 MVA, 13.8 KV Switchgear, With Air Circuit Breaker, Secondary Distribution Section	50,612.68	1,559.69
		For Weatherproofing, Add	*10,871.08*	
26 13 16 00-0016	EA	1,200 Amperes, 1,000 MVA, 13.8 KV Switchgear, With Air Circuit Breaker, Secondary Distribution Section	74,946.36	2,079.57
		For Weatherproofing, Add	*16,181.86*	
26 13 16 00-0017	EA	2,000 Amperes, 500 MVA, 13.8 KV Switchgear, With Air Circuit Breaker, Secondary Distribution Section	45,635.74	2,079.57
		For Weatherproofing, Add	*9,751.03*	
26 13 16 00-0018	EA	2,000 Amperes, 750 MVA, 13.8 KV Switchgear, With Air Circuit Breaker, Secondary Distribution Section	67,464.97	2,599.47
		For Weatherproofing, Add	*14,516.19*	
26 13 16 00-0019	EA	2,000 Amperes, 1,000 MVA, 13.8 KV Switchgear, With Air Circuit Breaker, Secondary Distribution Section	95,575.26	2,599.47
		For Weatherproofing, Add	*20,661.17*	
26 13 16 00-0020	EA	3,000 Amperes, 500 MVA, 13.8 KV Switchgear, With Air Circuit Breaker, Secondary Distribution Section	64,660.23	2,599.47
		For Weatherproofing, Add	*13,888.28*	
26 13 16 00-0021	EA	3,000 Amperes, 750 MVA, 13.8 KV Switchgear, With Air Circuit Breaker, Secondary Distribution Section	90,849.71	2,599.47
		For Weatherproofing, Add	*19,612.53*	
26 13 16 00-0022	EA	3,000 Amperes, 1,000 MVA, 13.8 KV Switchgear, With Air Circuit Breaker, Secondary Distribution Section	118,726.32	2,599.47
		For Weatherproofing, Add	*25,709.96*	

26 13 16 00-0023 4.16 Or 4.8 KV Switchgear Section, Without Air Circuit Breaker, Secondary Distribution Section *(26 13 16 00-0001)*

26 13 16 00-0024	EA	1,200 Amperes, 250 MVA, 4.16 Or 4.8 KV Switchgear, Without Air Circuit Breaker, Secondary Distribution Section	10,704.18	851.33
		For Weatherproofing, Add	*2,235.52*	
26 13 16 00-0025	EA	1,200 Amperes, 350 MVA, 4.16 Or 4.8 KV Switchgear, Without Air Circuit Breaker, Secondary Distribution Section	14,368.46	851.33
		For Weatherproofing, Add	*3,041.66*	
26 13 16 00-0026	EA	2,000 Amperes, 250 MVA, 4.16 Or 4.8 KV Switchgear, Without Air Circuit Breaker, Secondary Distribution Section	15,222.17	1,130.78
		For Weatherproofing, Add	*3,190.92*	
26 13 16 00-0027	EA	2,000 Amperes, 350 MVA, 4.16 Or 4.8 KV Switchgear, Without Air Circuit Breaker, Secondary Distribution Section	18,863.86	1,397.21
		For Weatherproofing, Add	*3,954.39*	
26 13 16 00-0028	EA	3,000 Amperes, 350 MVA, 4.16 Or 4.8 KV Switchgear, Without Air Circuit Breaker, Secondary Distribution Section	26,280.07	1,397.21
		For Weatherproofing, Add	*5,585.96*	

26 13 16 00-0029 7.2 KV Switchgear Section, Without Air Circuit Breaker, Secondary Distribution Section *(26 13 16 00-0001)*

26 13 16 00-0030	EA	1,200 Amperes, 500 MVA, 7.2 KV Switchgear, Without Air Circuit Breaker, Secondary Distribution Section	13,733.72	1,299.74
		For Weatherproofing, Add	*2,885.42*	
26 13 16 00-0031	EA	2,000 Amperes, 500 MVA, 7.2 KV Switchgear, Without Air Circuit Breaker, Secondary Distribution Section	18,015.84	1,299.74
		For Weatherproofing, Add	*3,789.19*	
26 13 16 00-0032	EA	3,000 Amperes, 500 MVA, 7.2 KV Switchgear, Without Air Circuit Breaker, Secondary Distribution Section	28,166.10	1,299.74
		For Weatherproofing, Add	*5,984.46*	

26 13 16 00-0033 13.8 KV Switchgear Section, Without Air Circuit Breaker, Secondary Distribution Section *(26 13 16 00-0001)*

26 13 16 00-0034	EA	1,200 Amperes, 500 MVA, 13.8 KV Switchgear, Without Air Circuit Breaker, Secondary Distribution Section	13,990.13	1,104.77
		For Weatherproofing, Add	*2,923.88*	
26 13 16 00-0035	EA	1,200 Amperes, 750 MVA, 13.8 KV Switchgear, Without Air Circuit Breaker, Secondary Distribution Section	15,050.61	1,104.77
		For Weatherproofing, Add	*3,157.19*	
26 13 16 00-0036	EA	1,200 Amperes, 1,000 MVA, 13.8 KV Switchgear, Without Air Circuit Breaker, Secondary Distribution Section	21,927.66	1,364.72
		For Weatherproofing, Add	*4,632.14*	
26 13 16 00-0037	EA	2,000 Amperes, 500 MVA, 13.8 KV Switchgear, Without Air Circuit Breaker, Secondary Distribution Section	18,808.09	1,637.67
		For Weatherproofing, Add	*3,908.03*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 13 16 00-0038	EA	2,000 Amperes, 750 MVA, 13.8 KV Switchgear, Without Air Circuit Breaker, Secondary Distribution Section	23,805.54	1,637.67
		For Weatherproofing, Add	*5,007.47*	
26 13 16 00-0039	EA	2,000 Amperes, 1,000 MVA, 13.8 KV Switchgear, Without Air Circuit Breaker, Secondary Distribution Section	27,318.97	1,910.61
		For Weatherproofing, Add	*5,741.79*	
26 13 16 00-0040	EA	3,000 Amperes, 500 MVA, 13.8 KV Switchgear, Without Air Circuit Breaker, Secondary Distribution Section	24,899.59	2,183.56
		For Weatherproofing, Add	*5,171.58*	
26 13 16 00-0041	EA	3,000 Amperes, 750 MVA, 13.8 KV Switchgear, Without Air Circuit Breaker, Secondary Distribution Section	28,323.99	2,183.56
		For Weatherproofing, Add	*5,924.94*	
26 13 16 00-0042	EA	3,000 Amperes, 1,000 MVA, 13.8 KV Switchgear, Without Air Circuit Breaker, Secondary Distribution Section	35,309.28	2,443.51
		For Weatherproofing, Add	*7,423.41*	

26 13 16 00-0043 Accessories For Substation Secondary Distribution Sections *(26 13 16 00-0001)*

26 13 16 00-0044	EA	1,200 Amperes, Transformer Throat Connection Accessories, Secondary Distribution Section	6,300.33	823.64
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*494.20*	
26 13 16 00-0045	EA	2,000 Amperes, Transformer Throat Connection Accessories, Secondary Distribution Section	8,078.70	913.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*548.41*	
26 13 16 00-0046	EA	3,000 Amperes, Transformer Throat Connection Accessories, Secondary Distribution Section	10,708.72	1,099.58
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*659.77*	
26 13 16 00-0047	EA	3-Phase Pothead Termination Accessories, Secondary Distribution Section	5,094.00	1,653.66
26 13 16 00-0048	EA	5 KV, 15 KVA, Control Power Transformer Accessories, Secondary Distribution Section	9,446.00	103.05
26 13 16 00-0049	EA	5 KV, 30 KVA, Control Power Transformer Accessories, Secondary Distribution Section	12,682.81	103.05
26 13 16 00-0050	EA	5 KV, 75 KVA, Control Power Transformer Accessories, Secondary Distribution Section	23,388.12	103.05
26 13 16 00-0051	EA	15 KV, 15 KVA, Control Power Transformer Accessories, Secondary Distribution Section	18,338.39	103.05
26 13 16 00-0052	EA	15 KV, 30 KVA, Control Power Transformer Accessories, Secondary Distribution Section	20,037.52	103.05
26 13 16 00-0053	EA	15 KV, 75 KVA, Control Power Transformer Accessories, Secondary Distribution Section	27,346.10	103.05
26 13 16 00-0054	EA	6 KV, 3-Phase Lightning Arrester Accessories, Secondary Distribution Section	4,171.77	103.05
26 13 16 00-0055	EA	9 KV, 3-Phase Lightning Arrester Accessories, Secondary Distribution Section	4,740.71	103.05
26 13 16 00-0056	EA	15 KV, 3-Phase Lightning Arrester Accessories, Secondary Distribution Section	7,302.48	103.05
26 13 16 00-0057	EA	Overcurrent Phase Protection, Time And Instantaneous Device 67	4,603.86	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 13 16 00-0058	EA	AC Ammeter With Switch	1,682.27	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 13 16 00-0059	EA	AC Voltmeter With Switch And Potential Transformer	1,682.27	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 13 16 00-0060	EA	Indicating Wattmeter	2,580.27	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 13 16 00-0061	EA	Indicating Varmeter	3,078.48	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 13 16 00-0062	EA	Indicating Watt-hour Meter, 2 Element	1,860.64	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 13 16 00-0063	EA	Ground Protection, Time Or Instantaneous Device 67N	3,337.73	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 13 16 00-0064	EA	Differential Generator Protection Single Phase NEMA Device 87	8,920.12	103.05
26 13 16 00-0065	EA	Current Transformers 5 And 15 KV Single Secondary	1,077.96	103.05
26 13 16 00-0066	EA	Potential Transformers 5 KV And 15 KV With Primary Fuses	5,887.82	103.05

26 13 19 Medium-Voltage Vacuum Interrupter Switchgear *(26 13)*

26 13 19 00-0001 Vacuum Circuit Breakers 13.8 KV *(26 13 19)*

26 13 19 00-0002	EA	1,200 Amperes, 500 MVA, Vacuum Circuit Breaker, 13.8 KV Substation, Secondary Distribution Section	95,482.24	1,624.67
26 13 19 00-0003	EA	1,200 Amperes, 750 MVA, Vacuum Circuit Breaker, 13.8 KV Substation, Secondary Distribution Section	105,268.08	2,053.58
26 13 19 00-0004	EA	1,200 Amperes, 1,000 MVA, Vacuum Circuit Breaker, 13.8 KV Substation, Secondary Distribution Section	119,437.92	2,053.58
26 13 19 00-0005	EA	2,000 Amperes, 500 MVA, Vacuum Circuit Breaker, 13.8 KV Substation, Secondary Distribution Section	109,783.24	1,624.67
26 13 19 00-0006	EA	2,000 Amperes, 750 MVA, Vacuum Circuit Breaker, 13.8 KV Substation, Secondary Distribution Section	123,853.23	1,624.67
26 13 19 00-0007	EA	2,000 Amperes, 1,000 MVA, Vacuum Circuit Breaker, 13.8 KV Substation, Secondary Distribution Section	141,105.79	1,910.61
26 13 19 00-0008	EA	3,000 Amperes, 500 MVA, Vacuum Circuit Breaker, 13.8 KV Substation, Secondary Distribution Section	145,229.63	2,183.56
26 13 19 00-0009	EA	3,000 Amperes, 750 MVA, Vacuum Circuit Breaker, 13.8 KV Substation, Secondary Distribution Section	159,371.07	2,183.56
26 13 19 00-0010	EA	3,000 Amperes, 1,000 MVA, Vacuum Circuit Breaker, 13.8 KV Substation, Secondary Distribution Section	174,025.34	2,456.51

26 13 29 Medium-Voltage Compartmentalized Switchgear *(26 13)*

26 13 29 00-0001 Substation Secondary Distribution Section *(26 13 29)*

Note: Low voltage drawout switchgear 277/480 volt, 3 phase 4 wire.

26 13 29 00-0002 Switchgear Compartment Complete With Air Circuit Breaker *(26 13 29 00-0001)*

Note: With solid state long - time and instantaneous trips.

26 13 29 00-0003	EA	800 Amperes, 277/480 Volt Switchgear, With Air Circuit Breaker, Manual DS-206	30,173.32	1,030.14
26 13 29 00-0004	EA	1,600 Amperes, 277/480 Volt Switchgear, With Air Circuit Breaker, Manual DS-416	47,020.45	1,557.47
26 13 29 00-0005	EA	2,000 Amperes, 277/480 Volt Switchgear, With Air Circuit Breaker, Manual DS-420	63,610.18	1,913.12
26 13 29 00-0006	EA	3,200 Amperes, 277/480 Volt Switchgear, With Air Circuit Breaker, Manual DS-632	107,278.77	2,219.71
26 13 29 00-0007	EA	4,000 Amperes, 277/480 Volt Switchgear, With Air Circuit Breaker, Manual DS-840	138,345.62	2,526.29

26 13 29 00-0008 Switchgear Compartment Without Circuit Breaker *(26 13 29 00-0001)*

26 13 29 00-0009	EA	800 Amperes, 277/480 Volt Switchgear, Without Air Circuit Breaker, Secondary Distribution Section	13,328.11	312.72
26 13 29 00-0010	EA	1,600 Amperes, 277/480 Volt Switchgear, Without Air Circuit Breaker, Secondary Distribution Section	15,401.71	312.72
26 13 29 00-0011	EA	2,000 Amperes, 277/480 Volt Switchgear, Without Air Circuit Breaker, Secondary Distribution Section	20,155.47	459.88
26 13 29 00-0012	EA	3,200 Amperes, 277/480 Volt Switchgear, Without Air Circuit Breaker, Secondary Distribution Section	29,077.85	459.88
26 13 29 00-0013	EA	4,000 Amperes, 277/480 Volt Switchgear, Without Air Circuit Breaker, Secondary Distribution Section	48,818.47	674.49

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 13 29 00-0014		Switchgear Compartment, Blank, Use As Filler Or Metering *(26 13 29 00-0001)*			
		Note: No provisions for future breaker.			
26 13 29 00-0015	EA	600 To 2,000 Amperes, Blank Section Filler, Secondary Distribution Section		10,651.73	349.52
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*199.85*	
26 13 29 00-0016	EA	3,000 Amperes, Blank Section Filler, Secondary Distribution Section		13,420.41	349.52
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*234.61*	
26 13 29 00-0017	EA	4,000 Amperes, Blank Section Filler, Secondary Distribution Section		17,331.97	539.60
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*337.25*	
26 13 29 00-0018		Accessories For Substation Secondary Distribution *(26 13 29 00-0001)*			
26 13 29 00-0019	EA	Short Time Delay Accessories, Secondary Distribution Section		6,040.66	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*61.83*	
26 13 29 00-0020	EA	Key Interlock Accessories, Secondary Distribution Section		4,639.31	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*61.83*	
26 13 29 00-0021	EA	Ammeter And Switch Complete Accessories, Secondary Distribution Section		15,294.87	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*61.83*	
26 13 29 00-0022	EA	Voltmeter And Switch Complete Accessories, Secondary Distribution Section		15,294.87	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*61.83*	
26 13 29 00-0023	EA	Wattmeter - Complete Accessories, Secondary Distribution Section		20,318.59	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*61.83*	
26 13 29 00-0024	EA	Watt-hour Meter - Complete Accessories, Secondary Distribution Section		26,399.92	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*61.83*	
26 13 29 00-0025	EA	Circuit Breaker Lifting Device Accessories, Secondary Distribution Section		11,243.10	117.54
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*70.50*	
26 13 29 00-0026	EA	Weatherproofing, Per Vertical Section Accessories, Secondary Distribution Section		30,574.31	1,740.74
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*1,044.45*	
26 13 29 00-0027	EA	Current Transformer, Single Section 5 To 800 Single Secondary 5 To 800		6,781.00	103.05
26 13 29 00-0028	EA	Potential Transformers Each With Fuses Accessories, Secondary Distribution Section		8,011.95	103.05
26 13 29 00-0029	EA	Shunt Trip And Auxiliary Switch Accessories, Secondary Distribution Section		4,289.48	51.52
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*30.92*	
26 13 29 00-0030	EA	3 Current Limiting Fuses 15 KV Accessories, Secondary Distribution Section		33,230.41	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*61.83*	
26 13 29 00-0031	EA	3 Phase Surge Capacitors 15 KV Accessories, Secondary Distribution Section		4,077.95	51.52

26 18 Medium-Voltage Circuit Protection Devices *(26 10)*

26 18 36 Medium-Voltage Enclosed Fuses *(26 18)*

26 18 36 00-0001		Sectionalizing Switch *(26 18 36)*			
26 18 36 00-0002		Pad Mounted Metal Enclosed Oil Filled Switching Units *(26 18 36 00-0001)*			
		Note: 15 KV - 25 KV.			
26 18 36 00-0003		Sectionalizing Tapping And Fusing Underground Feeders *(26 18 36 00-0002)*			
		Note: 200 Amp replaceable bushing wells recessed locking assembly oil level and oil fill plugs.			
26 18 36 00-0004	EA	3 Phase, 1 Switch Up And 2 Switch Downstream Tapping And Fusing Underground		100,577.07	874.30
26 18 36 00-0005	EA	3 Phase, 2 Switch Up And 2 Switch Downstream Tapping And Fusing Underground		113,198.77	874.30

26 19 High-Voltage Circuit Protection *(26 10)*

26 19 18 Protection Devices *(26 19)*

26 19 18 00-0001		Primary Fuse Cutouts *(26 19 18)*			
		Note: Interrupting rating RMS, amperes - 25,000 symmetric and 40,000 asymmetric.			
26 19 18 00-0002		Non-Loadbreak Current Limiting Primary Fuse Cutouts *(26 19 18 00-0001)*			
		Note: Includes the fuse and cutout switch.			
26 19 18 00-0003		8.3 KV-95 KV-BIL Non-Loadbreak Current Limiting *(26 19 18 00-0002)*			
26 19 18 00-0004	EA	15 A Primary Fuse Cutout 8.3 KV - 95 KV Non-Loadbreak Current Limiting		757.53	324.93
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*155.97*	
26 19 18 00-0005	EA	25 A Primary Fuse Cutout 8.3 KV - 95 KV Non-Loadbreak Current Limiting		887.50	324.93
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*194.96*	
26 19 18 00-0006	EA	40 A Primary Fuse Cutout 8.3 KV - 95 KV Non-Loadbreak Current Limiting		1,017.04	324.93
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*233.82*	
26 19 18 00-0007	EA	100 A Primary Fuse Cutout 8.3 KV - 95 KV Non-Loadbreak Current Limiting		1,039.64	324.93
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*233.96*	
26 19 18 00-0008	EA	200 A Primary Fuse Cutout 8.3 KV - 95 KV Non-Loadbreak Current Limiting		1,039.64	324.93
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*233.96*	
26 19 18 00-0009		17.1 KV-95 KV-BIL Non-Loadbreak Current Limiting *(26 19 18 00-0002)*			
26 19 18 00-0010	EA	15 A Primary Fuse Cutout 17.1 KV - 95 KV Non-Loadbreak Current Limiting		757.53	259.95
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*155.97*	
26 19 18 00-0011		17.1 KV-125 KV-BIL Non-Loadbreak Current Limiting *(26 19 18 00-0002)*			
26 19 18 00-0012	EA	15 A Primary Fuse Cutout 17.1 KV - 125 KV Non-Loadbreak Current Limiting		787.50	259.95
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*155.97*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 19 18 00-0013		**Fuseholders** *(26 19 18 00-0002)*		
		Note: Including current limiting fuse.		
26 19 18 00-0014	EA	15 A 8.3 KV Primary Fuseholder With Fuse Non-Loadbreak Current Limiting	631.22	324.93
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*155.97*	
26 19 18 00-0015	EA	25 A 8.3 KV Primary Fuseholder With Fuse Non-Loadbreak Current Limiting	761.19	324.93
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*194.96*	
26 19 18 00-0016	EA	40 A 8.3 KV Primary Fuseholder With Fuse Non-Loadbreak Current Limiting	890.73	324.93
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*233.82*	
26 19 18 00-0017	EA	100 A 8.3 KV Primary Fuseholder With Fuse Non-Loadbreak Current Limiting	641.60	324.93
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*155.97*	
26 19 18 00-0018	EA	200 A 8.3 KV Primary Fuseholder With Fuse Non-Loadbreak Current Limiting	771.57	324.93
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*194.96*	
26 19 18 00-0019	EA	15 A 17.1 KV Primary Fuseholder With Fuse Non-Loadbreak Current Limiting	631.22	259.95
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*155.97*	
26 19 18 00-0020		**Accessories** *(26 19 18 00-0002)*		
26 19 18 00-0021	EA	Hot Line Clamp	95.90	29.24
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*19.49*	
26 19 18 00-0022	EA	Stirrup	105.42	29.24
26 19 18 00-0023		**Loadbreak Current Limiting Primary Fuse Cutouts** *(26 19 18 00-0001)*		
		Note: Includes fuse, cutout switch, crossarm mounting bracket and fuse holder.		
26 19 18 00-0024		**8.3 KV-95 KV BIL Loadbreak Current Limiting** *(26 19 18 00-0023)*		
26 19 18 00-0025	EA	15 A Primary Fuse Cutout 8.3 KV - 95 KV Loadbreak Current Limiting	990.88	324.93
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*155.97*	
26 19 18 00-0026	EA	25 A Primary Fuse Cutout 8.3 KV - 95 KV Loadbreak Current Limiting	1,120.85	324.93
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*194.96*	
26 19 18 00-0027	EA	40 A Primary Fuse Cutout 8.3 KV - 95 KV Loadbreak Current Limiting	1,250.39	324.93
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*233.82*	
26 19 18 00-0028	EA	100 A Primary Fuse Cutout 8.3 KV - 95 KV Loadbreak Current Limiting	1,294.74	324.93
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*233.96*	
26 19 18 00-0029	EA	200 A Primary Fuse Cutout 8.3 KV - 95 KV Loadbreak Current Limiting	1,294.74	324.93
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*233.96*	
26 19 18 00-0030		**17.1 KV-95 KV BIL Loadbreak Current Limiting** *(26 19 18 00-0023)*		
26 19 18 00-0031	EA	15 A Primary Fuse Cutout 17.1 KV - 95 KV Loadbreak Current Limiting	990.88	259.95
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*155.97*	
26 19 18 00-0032		**17.1 KV-125 KV BIL Loadbreak Current Limiting** *(26 19 18 00-0023)*		
26 19 18 00-0033	EA	15 A Primary Fuse Cutout 17.1 KV - 125 KV Loadbreak Current Limiting	990.88	259.95
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*155.97*	
26 19 18 00-0034		**Fuseholders** *(26 19 18 00-0023)*		
		Note: Includes current limiting fuses.		
26 19 18 00-0035	EA	15 Amperes, 8.3 KV Primary Fuseholder With Fuse Loadbreak Current Limiting	641.93	324.93
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*155.97*	
26 19 18 00-0036	EA	25 Amperes, 8.3 KV Primary Fuseholder With Fuse Loadbreak Current Limiting	771.90	324.93
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*194.96*	
26 19 18 00-0037	EA	40 Amperes, 8.3 KV Primary Fuseholder With Fuse Loadbreak Current Limiting	901.44	324.93
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*233.82*	
26 19 18 00-0038	EA	15 Amperes, 17.1 KV Primary Fuseholder With Fuse Loadbreak Current Limiting	641.93	324.93
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*155.97*	
26 19 18 00-0039		**Pole Mounted Capacitors** *(26 19 18 00-0023)*		
26 19 18 00-0040	EA	Capacitors - Pole Mounted 6 KVAR	1,854.06	262.03
26 19 80		**Transmission and Distribution Accessories** *(26 19)*		
26 19 80 60		**Structure Assemblies** *(26 19 80)*		
26 19 80 60-0001		**Pole Structure Assemblies** *(26 19 80 60)*		
26 19 80 60-0002		**5 KV Pole Structure Assemblies** *(26 19 80 60-0001)*		
		Note: Includes insulator with pin, bayonet, bolts, washers, and neutral wire brackets.		
26 19 80 60-0003	EA	Type OH-1, Single Phase, 5 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	537.57	246.95
26 19 80 60-0004	EA	Type OH-2, Single Phase, 5 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	897.50	415.91
26 19 80 60-0005	EA	Type OH-3, Single Phase, 5 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	1,068.79	324.93
26 19 80 60-0006	EA	Type OH-4, Single Phase, 5 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	617.92	168.97
26 19 80 60-0007	EA	Type OH-5, Single Phase, 5 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	776.75	233.96
26 19 80 60-0008	EA	Type OH-6, Single Phase, 5 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	1,339.41	467.90
26 19 80 60-0009	EA	Type OH-7, Three Phase, 5 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	1,056.77	350.93
26 19 80 60-0010	EA	Type OH-8, Three Phase, 5 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	1,908.83	701.86
26 19 80 60-0011	EA	Type OH-9, Three Phase, 5 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	2,172.95	792.83

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 19 80 60-0012	EA	Type OH-10, Three Phase, 5 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	1,198.74	389.92
26 19 80 60-0013	EA	Type OH-11, Three Phase, 5 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	991.69	415.91
26 19 80 60-0014	EA	Type OH-12, Three Phase, 5 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	1,841.90	844.83
26 19 80 60-0015	EA	Type OH-13, Three Phase, 5 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	1,446.76	506.90
26 19 80 60-0016	EA	Type OH-14, Three Phase, 5 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	889.06	363.93
26 19 80 60-0017	EA	Type OH-15, Three Phase, 5 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	1,650.70	740.85
26 19 80 60-0018	EA	Type OH-16, Three Phase, 5 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	1,339.61	376.92
26 19 80 60-0019		**15 KV Pole Structure Assemblies** *(26 19 80 60-0001)*		
		Note: Includes insulator with pin, bayonet, bolts, washers, and neutral wire brackets.		
26 19 80 60-0020	EA	Type OH-1, Single Phase, 15 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	567.54	246.95
26 19 80 60-0021	EA	Type OH-2, Single Phase, 15 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	940.31	415.91
26 19 80 60-0022	EA	Type OH-3, Single Phase, 15 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	1,214.37	324.93
26 19 80 60-0023	EA	Type OH-4, Single Phase, 15 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	669.30	168.97
26 19 80 60-0024	EA	Type OH-5, Single Phase, 15 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	849.53	220.96
26 19 80 60-0025	EA	Type OH-6, Single Phase, 15 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	1,484.99	467.90
26 19 80 60-0026	EA	Type OH-7, Three Phase, 15 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	1,163.81	350.93
26 19 80 60-0027	EA	Type OH-8, Three Phase, 15 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	2,127.19	701.86
26 19 80 60-0028	EA	Type OH-9, Three Phase, 15 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	2,468.38	792.83
26 19 80 60-0029	EA	Type OH-10, Three Phase, 15 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	1,344.32	389.92
26 19 80 60-0030	EA	Type OH-11, Three Phase, 15 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	1,047.35	415.91
26 19 80 60-0031	EA	Type OH-12, Three Phase, 15 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	1,897.56	844.83
26 19 80 60-0032	EA	Type OH-13, Three Phase, 15 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	1,558.08	506.90
26 19 80 60-0033	EA	Type OH-14, Three Phase, 15 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	944.72	350.93
26 19 80 60-0034	EA	Type OH-15, Three Phase, 15 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	1,706.36	740.85
26 19 80 60-0035	EA	Type OH-16, Three Phase, 15 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	1,450.93	454.90
26 19 80 60-0036		**25 KV Pole Structure Assemblies** *(26 19 80 60-0001)*		
		Note: Includes insulator with pin, bayonet, bolts, washers, and neutral wire brackets.		
26 19 80 60-0037	EA	Type OH-3, Single Phase, 25 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	1,853.83	389.92
26 19 80 60-0038	EA	Type OH-4, Single Phase, 25 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	1,149.20	194.96
26 19 80 60-0039	EA	Type OH-5, Single Phase, 25 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	1,663.42	298.94
26 19 80 60-0040	EA	Type OH-6, Single Phase, 25 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	2,115.63	610.88
26 19 80 60-0041	EA	Type OH-7, Three Phase, 25 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	2,060.97	454.90
26 19 80 60-0042	EA	Type OH-8, Three Phase, 25 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	3,267.42	896.82
26 19 80 60-0043	EA	Type OH-9, Three Phase, 25 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	3,065.72	1,013.79
26 19 80 60-0044	EA	Type OH-13, Three Phase, 25 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	2,184.13	591.38
26 19 80 60-0045	EA	Type OH-16, Three Phase, 25 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	1,888.05	591.38
26 19 80 60-0046		**50 KV Pole Structure Assemblies** *(26 19 80 60-0001)*		
		Note: Includes insulator with pin, bayonet, bolts, washers, and neutral wire brackets.		
26 19 80 60-0047	EA	Type OH-3, Single Phase, 50 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	2,490.20	532.90
26 19 80 60-0048	EA	Type OH-4, Single Phase, 50 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	1,362.11	272.95
26 19 80 60-0049	EA	Type OH-5, Single Phase, 50 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	1,692.84	428.91
26 19 80 60-0050	EA	Type OH-6, Single Phase, 50 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	3,163.03	870.83
26 19 80 60-0051	EA	Type OH-7, Three Phase, 50 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	2,430.08	649.87
26 19 80 60-0052	EA	Type OH-8, Three Phase, 50 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	4,650.36	1,299.74
26 19 80 60-0053	EA	Type OH-9, Three Phase, 50 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	5,534.34	1,442.70
26 19 80 60-0054	EA	Type OH-10, Three Phase, 50 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	2,833.65	701.86
26 19 80 60-0055	EA	Type OH-13, Three Phase, 50 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	2,819.23	812.34
26 19 80 60-0056	EA	Type OH-16, Three Phase, 50 KV, Pole Assembly Insulation With Pin, Bayonet, Bolts, Washer	2,723.67	766.84
26 19 80 60-0057		**Overhead To Underground Conversion Structures** *(26 19 80 60)*		
		Note: Includes insulator with pin, bolts, washers, crossarms, fused cut out, arrestors, ground rods, clamps, conduit, molding, cable termination and neutral wire brackets. Excludes pole.		
26 19 80 60-0058		**5 KV Structures** *(26 19 80 60-0057)*		
		Note: Excludes pole.		
26 19 80 60-0059	EA	(3 Wire Dead End), 5 KV, Overhead To Underground Conversion Structures, Without Poles	5,711.57	2,599.47
26 19 80 60-0060	EA	(3 Wire Tangent), 5 KV, Overhead To Underground Conversion Structures, Without Poles	5,711.57	2,599.47
26 19 80 60-0061	EA	(4 Wire Tangent), 5 KV, Overhead To Underground Conversion Structures, Without Poles	5,711.57	2,599.47
26 19 80 60-0062	EA	(4 Wire Dead End), 5 KV, Overhead To Underground Conversion Structures, Without Poles	5,711.57	2,599.47
26 19 80 60-0063		**15 KV Structures** *(26 19 80 60-0057)*		
		Note: Excludes pole.		
26 19 80 60-0064	EA	(3 Wire Dead End), 15 KV, Overhead To Underground Conversion Structures, Without Poles	5,913.03	2,599.47
26 19 80 60-0065	EA	(3 Wire Tangent), 15 KV, Overhead To Underground Conversion Structures, Without Poles	5,913.03	2,599.47
26 19 80 60-0066	EA	(4 Wire Tangent), 15 KV, Overhead To Underground Conversion Structures, Without Poles	5,913.03	2,599.47
26 19 80 60-0067	EA	(4 Wire Dead End), 15 KV, Overhead To Underground Conversion Structures, Without Poles	5,913.03	2,599.47
26 19 80 60-0068		**25 KV Structures** *(26 19 80 60-0057)*		
		Note: Excludes pole.		
26 19 80 60-0069	EA	(3 Wire Dead End), 25 KV, Overhead To Underground Conversion Structures, Without Poles	6,132.80	2,599.47
26 19 80 60-0070	EA	(3 Wire Tangent), 25 KV, Overhead To Underground Conversion Structures, Without Poles	6,132.80	2,599.47
26 19 80 60-0071	EA	(4 Wire Tangent), 25 KV, Overhead To Underground Conversion Structures, Without Poles	6,132.80	2,599.47
26 19 80 60-0072	EA	(4 Wire Dead End), 25 KV, Overhead To Underground Conversion Structures, Without Poles	6,132.80	2,599.47

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 19 80 60-0073		Transformer Stations *(26 19 80 60)* Note: Includes insulator with pin, bolts, washers, crossarms, fused cut out, arrestors, ground rods, clamps, conduit, molding, cable termination, neutral wire brackets and transformer mounting bracket(s). Excludes pole and transformer.		
26 19 80 60-0074		5 KV Station *(26 19 80 60-0073)*		
26 19 80 60-0075	EA	(Single Transformer, 1 Phase, 4 Wire Tangent), 5 KV Transformer Station Without Pole	9,388.24	3,465.10
26 19 80 60-0076	EA	(Double Transformer, 1 Phase, 3 Wire Tangent), 5 KV Transformer Station Without Pole	10,519.30	3,899.21
26 19 80 60-0077	EA	(Triple Transformer, 3 Phase, 4 Wire Tangent), 5 KV Transformer Station Without Pole	11,650.37	4,332.03
26 19 80 60-0078	EA	(Triple Transformer, 3 Phase, 4 Wire Dead End), 5 KV Transformer Station Without Pole	11,650.37	4,332.03
26 19 80 60-0079	EA	(Single Transformer, 1 Phase, 2 Wire Tangent), 5 KV Transformer Station Without Pole	9,388.24	3,465.10
26 19 80 60-0080		15 KV Stations *(26 19 80 60-0073)*		
26 19 80 60-0081	EA	(Single Transformer, 1 Phase, 4 Wire Tangent), 15 KV Transformer Station Without Pole	9,699.60	3,464.11
26 19 80 60-0082	EA	(Double Transformer, 1 Phase, 3 Wire Tangent), 15 KV Transformer Station Without Pole	10,830.67	3,899.21
26 19 80 60-0083	EA	(Triple Transformer, 3 Phase, 4 Wire Tangent), 15 KV Transformer Station Without Pole	11,961.74	4,332.03
26 19 80 60-0084	EA	(Triple Transformer, 3 Phase, 4 Wire Dead End), 15 KV Transformer Station Without Pole	11,961.74	4,332.03
26 19 80 60-0085	EA	(Single Transformer, 1 Phase, 2 Wire Tangent), 15 KV Transformer Station Without Pole	9,699.60	3,465.10
26 19 80 60-0086		25 KV Stations *(26 19 80 60-0073)*		
26 19 80 60-0087	EA	(Single Transformer, 1 Phase, 4 Wire Tangent), 25 KV Transformer Station Without Pole	10,039.28	3,465.10
26 19 80 60-0088	EA	(Double Transformer, 1 Phase, 3 Wire Tangent), 25 KV Transformer Station Without Pole	11,170.34	3,899.21
26 19 80 60-0089	EA	(Triple Transformer, 3 Phase, 4 Wire Tangent), 25 KV Transformer Station Without Pole	12,301.41	4,332.03
26 19 80 60-0090	EA	(Triple Transformer, 3 Phase, 4 Wire Dead End), 25 KV Transformer Station Without Pole	12,301.41	4,332.03
26 19 80 60-0091	EA	(Single Transformer, 1 Phase, 2 Wire Tangent), 25 KV Transformer Station Without Pole	10,039.28	3,465.10

26 20 Low-Voltage Electrical Distribution *(26)*

26 21 Low-Voltage Electrical Service Entrance *(26 20)*

See CSI section 26 05 13 00-0000 for wire and cables.

26 21 13 Low-Voltage Overhead Electrical Service Entrance *(26 21)*

26 21 13 00-0001		Service Drop Cable And Weatherheads *(26 21 13)*		
26 21 13 00-0002		600 Volt Insulated Stranded Conductors *(26 21 13 00-0001)*		
26 21 13 00-0003		Aluminum Duplex ACSR Neutral *(26 21 13 00-0002)*		
26 21 13 00-0004	LF	#6 AWG, 600 Volt, Aluminum Duplex ACSR With Neutral Cable Service Drop, Stranded Cable	8.56	3.10
26 21 13 00-0005	LF	#4 AWG, 600 Volt, Aluminum Duplex ACSR With Neutral Cable Service Drop, Stranded Cable	10.42	3.66
26 21 13 00-0006	LF	#2 AWG, 600 Volt, Aluminum Duplex ACSR With Neutral Cable Service Drop, Stranded Cable	12.53	4.13
26 21 13 00-0007	LF	1/0 AWG, 600 Volt, Aluminum Duplex ACSR With Neutral Cable Service Drop, Stranded Cable	17.10	5.20
26 21 13 00-0008		Aluminum Triplex ACSR Neutral *(26 21 13 00-0002)*		
26 21 13 00-0009	LF	#6 AWG, 600 Volt, Aluminum Triplex ACSR With Neutral Cable Service Drop, Stranded Cable	10.61	3.66
26 21 13 00-0010	LF	#4 AWG, 600 Volt, Aluminum Triplex ACSR With Neutral Cable Service Drop, Stranded Cable	12.28	4.13
26 21 13 00-0011	LF	#2 AWG, 600 Volt, Aluminum Triplex ACSR With Neutral Cable Service Drop, Stranded Cable	15.64	5.20
26 21 13 00-0012	LF	1/0 AWG, 600 Volt, Aluminum Triplex ACSR With Neutral Cable Service Drop, Stranded Cable	19.86	6.34
26 21 13 00-0013	LF	2/0 AWG, 600 Volt, Aluminum Triplex ACSR With Neutral Cable Service Drop, Stranded Cable	25.75	8.38
26 21 13 00-0014	LF	4/0 AWG, 600 Volt, Aluminum Triplex ACSR With Neutral Cable Service Drop, Stranded Cable	33.25	10.40
26 21 13 00-0015	LF	336 MCM, 600 Volt, Aluminum Triplex ACSR With Neutral Cable Service Drop, Stranded Cable	46.40	12.37
26 21 13 00-0016		Aluminum Quadruplex ACSR Neutral *(26 21 13 00-0002)*		
26 21 13 00-0017	LF	#6 AWG, 600 Volt, Aluminum Quadruplex ACSR With Neutral Cable Service Drop, Stranded Cable	12.33	4.13
26 21 13 00-0018	LF	#4 AWG, 600 Volt, Aluminum Quadruplex ACSR With Neutral Cable Service Drop, Stranded Cable	15.63	5.20
26 21 13 00-0019	LF	#2 AWG, 600 Volt, Aluminum Quadruplex ACSR With Neutral Cable Service Drop, Stranded Cable	20.26	6.66
26 21 13 00-0020	LF	1/0 AWG, 600 Volt, Aluminum Quadruplex ACSR With Neutral Cable Service Drop, Stranded Cable	26.90	8.38
26 21 13 00-0021	LF	2/0 AWG, 600 Volt, Aluminum Quadruplex ACSR With Neutral Cable Service Drop, Stranded Cable	30.02	9.29
26 21 13 00-0022	LF	3/0 AWG, 600 Volt, Aluminum Quadruplex ACSR With Neutral Cable Service Drop, Stranded Cable	35.16	10.40
26 21 13 00-0023	LF	4/0 AWG, 600 Volt, Aluminum Quadruplex ACSR With Neutral Cable Service Drop, Stranded Cable	41.17	12.37
26 21 13 00-0024	LF	336 MCM, 600 Volt, Aluminum Quadruplex ACSR With Neutral Cable Service Drop, Stranded Cable	53.78	13.68
26 21 13 00-0025		Weatherproof Conduit Hubs *(26 21 13 00-0002)*		
26 21 13 00-0026	EA	1/2" Weatherproof Conduit Hubs	53.17	19.86
26 21 13 00-0027	EA	3/4" Weatherproof Conduit Hubs	60.74	22.56
26 21 13 00-0028	EA	1" Weatherproof Conduit Hubs	71.31	25.27
26 21 13 00-0029	EA	1-1/4" Weatherproof Conduit Hubs	100.62	33.84
26 21 13 00-0030	EA	1-1/2" Weatherproof Conduit Hubs	111.19	36.55
26 21 13 00-0031	EA	2" Weatherproof Conduit Hubs	147.63	42.41
26 21 13 00-0032	EA	2-1/2" Weatherproof Conduit Hubs	200.34	47.82
26 21 13 00-0033	EA	3" Weatherproof Conduit Hubs	263.14	56.40
26 21 13 00-0034	EA	4" Weatherproof Conduit Hubs	455.46	112.80

copyright 2026 The Gordian Group, Inc.

CSI	MINOR UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 21 13 00-0035		Galvanized Threaded Service Entrance Weatherhead Cap *(26 21 13 00-0002)*		
26 21 13 00-0036	EA	1/2" Galvanized Threaded Service Entrance Weatherhead Cap For #14 Through #10 AWG Cable Service	61.91	19.86
26 21 13 00-0037	EA	3/4" Galvanized Threaded Service Entrance Weatherhead Cap For #12 Through #8 AWG Cable Service	71.21	22.56
26 21 13 00-0038	EA	1" Galvanized Threaded Service Entrance Weatherhead Cap For #6 AWG Cable Service	82.08	25.27
26 21 13 00-0039	EA	1-1/4" Galvanized Threaded Service Entrance Weatherhead Cap For #4 Through #2 AWG Cable Service	110.41	33.84
26 21 13 00-0040	EA	1-1/2" Galvanized Threaded Service Entrance Weatherhead Cap For #4 Through #2 AWG Cable Service	126.53	36.55
26 21 13 00-0041	EA	2" Galvanized Threaded Service Entrance Weatherhead Cap For 1/0 Through 2/0 AWG Cable Service	171.71	42.41
26 21 13 00-0042	EA	2-1/2" Galvanized Threaded Service Entrance Weatherhead Cap For 3/0 Through 4/0 Cable Service	311.76	47.82
26 21 13 00-0043	EA	3" Galvanized Threaded Service Entrance Weatherhead Cap For 250 Through 350 MCM Cable Service	353.01	56.40
26 21 13 00-0044	EA	4" Galvanized Threaded Service Entrance Weatherhead Cap For 600 Through 750 MCM Cable Service	560.87	112.80
26 21 13 00-0045		Aluminum Clamp-On Service Entrance Weatherhead Cap *(26 21 13 00-0002)*		
26 21 13 00-0046	EA	1/2" Aluminum Clamp-On Service Entrance Weatherhead Cap For #14 To #12 AWG Cable Service	59.23	19.86
26 21 13 00-0047	EA	3/4" Aluminum Clamp-On Service Entrance Weatherhead Cap For #10 To #8 AWG Cable Service	66.70	22.56
26 21 13 00-0048	EA	1" Aluminum Clamp-On Service Entrance Weatherhead Cap For #6 AWG Cable Service	75.99	25.15
26 21 13 00-0049	EA	1-1/4" Aluminum Clamp-On Service Entrance Weatherhead Cap For #4 To #2 AWG Cable Service	100.76	33.84
26 21 13 00-0050	EA	1-1/2" Aluminum Clamp-On Service Entrance Weatherhead Cap For #4 To #2 AWG Cable Service	113.50	36.55
26 21 13 00-0051	EA	2" Aluminum Clamp-On Service Entrance Weatherhead Cap For 1/0 To 2/0 AWG Cable Service	134.49	42.41
26 21 13 00-0052	EA	2-1/2" Aluminum Clamp-On Service Entrance Weatherhead Cap For 3/0 To 4/0 Cable Service	241.95	47.82
26 21 13 00-0053	EA	3" Aluminum Clamp-On Service Entrance Weatherhead Cap For 250 To 350 MCM Cable Service	317.91	56.40
26 21 13 00-0054	EA	3-1/2" Aluminum Clamp-On Service Entrance Weatherhead Cap For 400 To 500 MCM Cable Service	442.49	84.60
26 21 13 00-0055	EA	4" Aluminum Clamp-On Service Entrance Weatherhead Cap For 600 To 750 MCM Cable Service	519.09	112.80
26 21 13 00-0056		Polyvinyl Chloride (PVC) Threaded Service Entrance Weatherhead Cap *(26 21 13 00-0002)*		
26 21 13 00-0057	EA	1/2" Polyvinyl Chloride (PVC) Threaded Service Entrance Weatherhead Cap For #14 To #12 AWG Cable Service	54.97	19.86
26 21 13 00-0058	EA	3/4" Polyvinyl Chloride (PVC) Threaded Service Entrance Weatherhead Cap For #10 To #8 AWG Cable Service	62.95	22.56
26 21 13 00-0059	EA	1" Polyvinyl Chloride (PVC) Threaded Service Entrance Weatherhead Cap For #6 AWG Cable Service	71.60	25.15
26 21 13 00-0060	EA	1-1/4" Polyvinyl Chloride (PVC) Threaded Service Entrance Weatherhead Cap For #4 To #2 AWG Cable Service	95.32	33.84
26 21 13 00-0061	EA	1-1/2" Polyvinyl Chloride (PVC) Threaded Service Entrance Weatherhead Cap For #4 To #2 AWG Cable Service	103.92	36.55
26 21 13 00-0062	EA	2" Polyvinyl Chloride (PVC) Threaded Service Entrance Weatherhead Cap For 1/0 To 2/0 AWG Cable Service	128.21	42.41
26 21 13 00-0063	EA	2-1/2" Polyvinyl Chloride (PVC) Threaded Service Entrance Weatherhead Cap For 3/0 To 4/0 Cable Service	221.69	47.82
26 21 13 00-0064	EA	3" Polyvinyl Chloride (PVC) Threaded Service Entrance Weatherhead Cap For 250 To 350 MCM Cable Service	247.56	56.40
26 21 13 00-0065	EA	3-1/2" Polyvinyl Chloride (PVC) Threaded Service Entrance Weatherhead Cap For 400 To 500 MCM Cable Service	429.29	84.60
26 21 13 00-0066	EA	4" Polyvinyl Chloride (PVC) Threaded Service Entrance Weatherhead Cap For 600 To 750 MCM Cable Service	595.96	112.80
26 21 16		**Low-Voltage Underground Electrical Service Entrance** *(26 21)*		
26 21 16 00-0001		Aluminum Triplex For Underground Service, Direct Burial *(26 21 16)* Note: Excludes excavation and backfill.		
26 21 16 00-0002	MLF	#6 AWG, 600 Volt, Aluminum Triplex URD With Neutral Cable, Stranded Cable, Direct Burial	4,634.46	1,155.34
26 21 16 00-0003	MLF	#4 AWG, 600 Volt, Aluminum Triplex URD With Neutral Cable, Stranded Cable, Direct Burial	5,379.05	1,223.31
26 21 16 00-0004	MLF	#2 AWG, 600 Volt, Aluminum Triplex URD With Neutral Cable, Stranded Cable, Direct Burial	6,467.66	1,299.74
26 21 16 00-0005	MLF	1/0 AWG, 600 Volt, Aluminum Triplex URD With Neutral Cable, Stranded Cable, Direct Burial	7,846.75	1,299.74
26 21 16 00-0006	MLF	2/0 AWG, 600 Volt, Aluminum Triplex URD With Neutral Cable, Stranded Cable, Direct Burial	8,779.84	1,386.43
26 21 16 00-0007	MLF	3/0 AWG, 600 Volt, Aluminum Triplex URD With Neutral Cable, Stranded Cable, Direct Burial	10,466.63	1,599.72
26 21 16 00-0008	MLF	4/0 AWG, 600 Volt, Aluminum Triplex URD With Neutral Cable, Stranded Cable, Direct Burial	12,740.64	2,079.57
26 22		**Low-Voltage Transformers** *(26 20)*		
26 22 13		**Low-Voltage Distribution Transformers** *(26 22)*		
26 22 13 00-0001		Single Phase General Purpose "Dry Type" Transformers *(26 22 13)* Note: 60 HZ type EP and EPT 115 C rise, 185 C insulation, type DT-3 and DS-3 150 C rise, 220 C insulation. Indoor Use. Wall mounted for up to 10 KVA, floor mounted for 15 KVA and larger. DT-3 and DS-3 use weathershields for outdoor placement. UL listed.		
26 22 13 00-0002		480 Volt, 120/240 Volt, General Purpose Dry Type Transformers *(26 22 13 00-0001)* Note: 2-2.5 Percent taps above and 4-2.5 percent taps below.		
26 22 13 00-0003	EA	1 KVA, 480 Volt - 120/240 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	1,687.86	290.34
26 22 13 00-0004	EA	3 KVA, 480 Volt - 120/240 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	2,382.36	348.41
26 22 13 00-0005	EA	5 KVA, 480 Volt - 120/240 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	3,136.33	363.51
26 22 13 00-0006	EA	7.5 KVA, 480 Volt - 120/240 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	3,897.22	377.45
26 22 13 00-0007	EA	10 KVA, 480 Volt - 120/240 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	5,738.45	406.49
26 22 13 00-0008	EA	15 KVA, 480 Volt - 120/240 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	6,917.54	435.51
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*302.33*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*453.49*	
26 22 13 00-0009	EA	25 KVA, 480 Volt - 120/240 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	7,602.91	464.55
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*333.69*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*500.54*	
26 22 13 00-0010	EA	37.5 KVA, 480 Volt - 120/240 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	7,266.58	522.62
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*311.07*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*466.60*	
26 22 13 00-0011	EA	50 KVA, 480 Volt - 120/240 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	8,731.59	580.69
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*378.51*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*567.77*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 22 13 00-0012	EA	75 KVA, 480 Volt - 120/240 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	11,655.17	696.83
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*513.08*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*769.61*	
26 22 13 00-0013	EA	100 KVA, 480 Volt - 120/240 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	14,897.68	812.96
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*663.59*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*995.38*	
26 22 13 00-0014	EA	167 KVA, 480 Volt - 120/240 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	24,104.17	1,045.24
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*1,100.69*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*1,651.03*	
26 22 13 00-0015	EA	250 KVA, 480 Volt - 120/240 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	44,317.16	1,277.51
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*2,088.11*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*3,132.16*	
26 22 13 00-0016	EA	333 KVA, 480 Volt - 120/240 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	70,280.46	1,451.72
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*3,368.85*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*5,053.28*	
26 22 13 00-0017		**240 x 480 Volt, 120/240 Volt, General Purpose Dry Type Transformers** *(26 22 13 00-0001)*		
		Note: 1-10 Percent x 2-5 percent FCBN taps.		
26 22 13 00-0018	EA	3 KVA, 240 x 480 Volt - 120/240 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	1,867.10	348.41
26 22 13 00-0019	EA	5 KVA, 240 x 480 Volt - 120/240 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	2,310.67	362.93
26 22 13 00-0020	EA	7.5 KVA, 240 x 480 Volt - 120/240 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	2,974.27	377.45
26 22 13 00-0021	EA	10 KVA, 240 x 480 Volt - 120/240 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	3,568.10	406.49
26 22 13 00-0022		**240 x 480 Volt, 120/240 Volt, General Purpose Dry Type Transformers** *(26 22 13 00-0001)*		
		Note: 2-5 Percent x 4 - 2.5 percent FCBN taps.		
26 22 13 00-0023	EA	15 KVA, 240 x 480 Volt - 120/240 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	7,219.86	435.51
26 22 13 00-0024	EA	25 KVA, 240 x 480 Volt - 120/240 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	7,936.60	464.55
26 22 13 00-0025		**208 x 230 Volt, 120 Volt, General Purpose Dry Type Transformers** *(26 22 13 00-0001)*		
		Note: 1-10 Percent x 2-5 percent FCBN taps.		
26 22 13 00-0026	EA	0.5 KVA, 208/230 Volt - 120 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	1,374.53	261.31
26 22 13 00-0027	EA	1 KVA, 208/230 Volt - 120 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	1,571.30	290.34
26 22 13 00-0028	EA	2 KVA, 208/230 Volt - 120 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	2,119.58	319.38
26 22 13 00-0029	EA	3 KVA, 208/230 Volt - 120 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	2,484.15	348.41
26 22 13 00-0030	EA	5 KVA, 208/230 Volt - 120 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	2,827.55	363.51
26 22 13 00-0031	EA	7.5 KVA, 208/230 Volt - 120 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	3,291.90	377.45
26 22 13 00-0032	EA	10 KVA, 208/230 Volt - 120 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	4,353.93	406.49
26 22 13 00-0033	EA	15 KVA, 208/230 Volt - 120 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	6,129.98	435.51
26 22 13 00-0034		**1 Phase Mounting Brackets** *(26 22 13 00-0001)*		
26 22 13 00-0035	EA	1 Phase Mounting Brackets (Set Of 2) For Transformers Up To 100 KVA	603.24	206.10
26 22 13 00-0036		**1 Phase Weathershields** *(26 22 13 00-0001)*		
		Note: Use with types DT-3 and DS-3.		
26 22 13 00-0037	EA	37.5 KVA 1 Phase Weathershields, Set Of 2	217.81	
26 22 13 00-0038	EA	50 KVA 1 Phase Weathershields, Set Of 2	277.64	
26 22 13 00-0039	EA	75 KVA 1 Phase Weathershields, Set Of 2	331.08	
26 22 13 00-0040	EA	100 KVA 1 Phase Weathershields, Set Of 2	394.97	
26 22 13 00-0041	EA	167 KVA 1 Phase Weathershields, Set Of 2	534.37	
26 22 13 00-0042	EA	250 KVA 1 Phase Weathershields, Set Of 2	638.92	
26 22 13 00-0043	EA	333 KVA 1 Phase Weathershields, Set Of 2	784.13	
26 22 13 00-0044		**Packaged Power Supply** *(26 22 13 00-0001)*		
		Note: 2-5 Percent FCBN taps.		
26 22 13 00-0045	EA	5 KVA, 480 Volt - 120/240 Volt, Transformer With 6 - 1 Pole / 3 - 2 Pole Max 20 Amperes Breakers	3,928.07	362.93
26 22 13 00-0046	EA	7.5 KVA, 480 Volt - 120/240 Volt, Transformer With 8 - 1 Pole / 4 - 2 Pole Max 30 Amperes Breakers	4,499.19	377.45
26 22 13 00-0047	EA	10 KVA, 480 Volt - 120/240 Volt, Transformer With 10 - 1 Pole / 5 - 2 Pole Max 40 Amperes Breakers	4,880.15	406.49
26 22 13 00-0048	EA	15 KVA, 480 Volt - 120/240 Volt, Transformer With 16 - 1 Pole / 8 - 2 Pole Max 60 Amperes Breakers	6,149.79	435.51
26 22 13 00-0049	EA	25 KVA, 480 Volt - 120/240 Volt, Transformer With 24 - 1 Pole / 12 - 2 Pole Max 100 Amperes Breakers	8,802.80	464.55
26 22 13 00-0050		**240 Volt, 120/240 Volt, Single Phase Isolation Transformer Computer Grade** *(26 22 13 00-0001)*		
26 22 13 00-0051	EA	0.5 KVA, 240 Volt - 120/240 Volt, 1 Phase, 60 Hertz, Isolation Transformer	2,933.09	261.31
26 22 13 00-0052	EA	1 KVA, 240 Volt - 120/240 Volt, 1 Phase, 60 Hertz, Isolation Transformer	4,327.08	290.34
26 22 13 00-0053	EA	2.5 KVA, 240 Volt - 120/240 Volt, 1 Phase, 60 Hertz, Isolation Transformer	5,024.06	348.41
26 22 13 00-0054	EA	5 KVA, 240 Volt - 120/240 Volt, 1 Phase, 60 Hertz, Isolation Transformer	5,604.89	362.93
26 22 13 00-0055	EA	7.5 KVA, 240 Volt - 120/240 Volt, 1 Phase, 60 Hertz, Isolation Transformer	6,389.00	377.45
26 22 13 00-0056	EA	10 KVA, 240 Volt - 120/240 Volt, 1 Phase, 60 Hertz, Isolation Transformer	8,421.92	406.49
26 22 13 00-0057	EA	15 KVA, 240 Volt - 120/240 Volt, 1 Phase, 60 Hertz, Isolation Transformer	11,140.22	435.51
26 22 13 00-0058		**600 Volt, 208/120 Volt, Dry General Purpose Transformer** *(26 22 13 00-0001)*		
26 22 13 00-0059	EA	15 KVA, 600 Volt, 208 Y / 120 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	13,941.84	435.51

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 22 13 00-0060	EA	25 KVA, 600 Volt, 208 Y / 120 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	14,433.14	464.55
26 22 13 00-0061	EA	30 KVA, 600 Volt, 208 Y / 120 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	14,970.54	493.58
26 22 13 00-0062	EA	37.5 KVA, 600 Volt, 208 Y / 120 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	20,041.88	522.62
26 22 13 00-0063	EA	45 KVA, 600 Volt, 208 Y / 120 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	20,807.66	551.66
26 22 13 00-0064	EA	50 KVA, 600 Volt, 208 Y / 120 Volt, 1 Phase, 60 Hertz, General Purpose Dry Type Transformer	28,092.87	580.69

26 22 13 00-0065 3 Phase General Purpose "Dry Type" Transformer *(26 22 13)*

Note: 60 HZ type EP and EPT 115 C rise, 185 C insulation, type DT-3 and DS-3 150 C rise, 220 C insulation. Indoor use. Wall mounted for up to 10 KVA, floor mounted for 15 KVA and larger. DT-3 and DS-3 use weathershields for outdoor placement. UL listed.

26 22 13 00-0066 Packaged Power Supply *(26 22 13 00-0065)*

Note: 2-5 Percent FCBN taps.

26 22 13 00-0067	EA	15 KVA, 480 Volt - 208/120 Volt, Transformer With 12 - 1 Pole / 4 - 3 Pole Max, 40 Amperes Breakers	17,845.82	1,248.48
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*767.44*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*1,151.16*	
26 22 13 00-0068	EA	22.5 KVA, 480 Volt - 208/120 Volt, Transformer With 18 - 1 Pole / 6 - 3 Pole Max, 60 Amperes Breakers	21,691.70	1,335.58
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*951.03*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*1,426.54*	
26 22 13 00-0069	EA	30 KVA, 480 Volt - 208/120 Volt, Transformer With 24 - 1 Pole / 8 - 3 Pole Max, 80 Amperes Breakers	26,241.36	1,451.72
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*1,166.90*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*1,750.34*	

26 22 13 00-0070 Drive Isolation Transformers *(26 22 13 00-0065)*

Note: Only use in step-up applications.

26 22 13 00-0071 230 Volt Drive Isolation Transformers *(26 22 13 00-0070)*

26 22 13 00-0072	EA	7.5 KVA, 230 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	11,648.29	464.55
26 22 13 00-0073	EA	11 KVA, 230 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	13,711.19	493.58
26 22 13 00-0074	EA	15 KVA, 230 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	14,170.23	522.62
26 22 13 00-0075	EA	20 KVA, 230 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	16,831.90	551.66
26 22 13 00-0076	EA	27 KVA, 230 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	17,359.71	609.72
26 22 13 00-0077	EA	34 KVA, 230 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	19,090.40	667.79
26 22 13 00-0078	EA	40 KVA, 230 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	21,633.73	725.86
26 22 13 00-0079	EA	51 KVA, 230 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	25,224.17	812.96
26 22 13 00-0080	EA	63 KVA, 230 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	27,361.93	842.00
26 22 13 00-0081	EA	75 KVA, 230 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	31,755.79	871.03
26 22 13 00-0082	EA	93 KVA, 230 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	40,276.93	900.07
26 22 13 00-0083	EA	118 KVA, 230 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	45,061.98	1,103.30
26 22 13 00-0084	EA	145 KVA, 230 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	50,379.99	1,161.38
26 22 13 00-0085	EA	175 KVA, 230 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	57,900.65	1,219.45
26 22 13 00-0086	EA	220 KVA, 230 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	70,688.26	1,451.72
26 22 13 00-0087	EA	275 KVA, 230 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	94,007.19	1,713.03
26 22 13 00-0088	EA	330 KVA, 230 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	99,092.37	1,887.24
26 22 13 00-0089	EA	440 KVA, 230 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	121,028.11	2,090.47
26 22 13 00-0090	EA	550 KVA, 230 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	149,816.98	2,322.75

26 22 13 00-0091 208V Drive Isolation Transformers *(26 22 13 00-0070)*

26 22 13 00-0092	EA	7.5 KVA, 208 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	12,193.89	464.55
26 22 13 00-0093	EA	11 KVA, 208 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	14,358.85	493.58
26 22 13 00-0094	EA	15 KVA, 208 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	14,838.29	522.62
26 22 13 00-0095	EA	20 KVA, 208 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	17,632.49	551.66
26 22 13 00-0096	EA	27 KVA, 208 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	18,181.25	609.72
26 22 13 00-0097	EA	30 KVA, 208 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	19,936.05	638.75
26 22 13 00-0098	EA	45 KVA, 208 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	22,719.06	754.89
26 22 13 00-0099	EA	51 KVA, 208 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	26,425.32	812.96
26 22 13 00-0100	EA	63 KVA, 208 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	28,668.94	842.00
26 22 13 00-0101	EA	75 KVA, 208 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	33,283.49	871.03
26 22 13 00-0102	EA	93 KVA, 208 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	42,235.41	900.07
26 22 13 00-0103	EA	118 KVA, 208 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	47,243.32	1,103.30
26 22 13 00-0104	EA	145 KVA, 208 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	52,826.11	1,161.38
26 22 13 00-0105	EA	175 KVA, 208 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	60,723.65	1,219.45
26 22 13 00-0106	EA	220 KVA, 208 Volt, 3 Phase, Delta Primary: 460/266 Volt, 3 Phase, Secondary, Drive Isolation Transformers	74,138.52	1,451.72

26 22 13 00-0107 480 Volt x 208Y/120 Volt, 2-2.5 Percent FCBN Taps *(26 22 13 00-0065)*

26 22 13 00-0108	EA	9 KVA, 480 x 208 Y / 120 Volt, 3 Phase, 60 Hertz, General Purpose Dry Type Transformer	7,942.64	479.07
26 22 13 00-0109	EA	15 KVA, 480 x 208 Y / 120 Volt, 3 Phase, 60 Hertz, General Purpose Dry Type Transformer	10,628.84	522.62
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*479.18*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*718.77*	

26 22 13 00-0110 480 Volt x 208Y/120 Volt, 2-2.5 Percent FCAN And 4-2.5 Percent FCBN Taps *(26 22 13 00-0065)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 22 13 00-0111	EA	30 KVA, 480 x 208 Y / 120 Volt, 3 Phase, 60 Hertz, General Purpose Dry Type Transformer	11,804.84	638.75
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*526.37*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*789.55*	
		For K4 Factor Rating, Add	*7,369.13*	
		For K13 Factor Rating, Add	*10,527.33*	
		For K20 Factor Rating, Add	*13,685.53*	
26 22 13 00-0112	EA	37.5 KVA, 480 x 208 Y / 120 Volt, 3 Phase, 60 Hertz, General Purpose Dry Type Transformer	14,406.01	696.83
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*650.62*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*975.93*	
		For K4 Factor Rating, Add	*9,108.65*	
		For K13 Factor Rating, Add	*13,012.36*	
		For K20 Factor Rating, Add	*16,916.07*	
26 22 13 00-0113	EA	45 KVA, 480 x 208 Y / 120 Volt, 3 Phase, 60 Hertz, General Purpose Dry Type Transformer	15,006.92	754.89
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*674.86*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*1,012.28*	
		For K4 Factor Rating, Add	*9,447.99*	
		For K13 Factor Rating, Add	*13,497.13*	
		For K20 Factor Rating, Add	*17,546.27*	
26 22 13 00-0114	EA	50 KVA, 480 x 208 Y / 120 Volt, 3 Phase, 60 Hertz, General Purpose Dry Type Transformer	20,073.50	812.96
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*922.38*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*1,383.57*	
		For K4 Factor Rating, Add	*12,913.31*	
		For K13 Factor Rating, Add	*18,447.58*	
		For K20 Factor Rating, Add	*23,981.85*	
26 22 13 00-0115	EA	75 KVA, 480 x 208 Y / 120 Volt, 3 Phase, 60 Hertz, General Purpose Dry Type Transformer	19,651.89	871.03
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*895.49*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*1,343.24*	
		For K4 Factor Rating, Add	*12,536.87*	
		For K13 Factor Rating, Add	*17,909.82*	
		For K20 Factor Rating, Add	*23,282.77*	
26 22 13 00-0116	EA	112.5 KVA, 480 x 208 Y / 120 Volt, 3 Phase, 60 Hertz, General Purpose Dry Type Transformer	24,542.50	1,045.24
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*1,122.60*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*1,683.90*	
		For K4 Factor Rating, Add	*15,716.42*	
		For K13 Factor Rating, Add	*22,452.03*	
		For K20 Factor Rating, Add	*29,187.64*	
26 22 13 00-0117	EA	150 KVA, 480 x 208 Y / 120 Volt, 3 Phase, 60 Hertz, General Purpose Dry Type Transformer	32,265.99	1,161.38
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*1,497.16*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*2,245.74*	
		For K4 Factor Rating, Add	*20,960.27*	
		For K13 Factor Rating, Add	*29,943.24*	
		For K20 Factor Rating, Add	*38,926.21*	
26 22 13 00-0118	EA	225 KVA, 480 x 208 Y / 120 Volt, 3 Phase, 60 Hertz, General Purpose Dry Type Transformer	44,275.63	1,451.72
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*2,068.61*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*3,102.91*	
		For K4 Factor Rating, Add	*28,960.53*	
		For K13 Factor Rating, Add	*41,372.19*	
		For K20 Factor Rating, Add	*53,783.85*	
26 22 13 00-0119	EA	300 KVA, 480 x 208 Y / 120 Volt, 3 Phase, 60 Hertz, General Purpose Dry Type Transformer	53,905.77	1,800.13
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*2,515.28*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*3,772.91*	
		For K4 Factor Rating, Add	*35,213.86*	
		For K13 Factor Rating, Add	*50,305.51*	
		For K20 Factor Rating, Add	*65,397.16*	
26 22 13 00-0120	EA	500 KVA, 480 x 208 Y / 120 Volt, 3 Phase, 60 Hertz, General Purpose Dry Type Transformer	78,077.49	2,206.62
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*3,683.21*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*5,524.82*	
		For K4 Factor Rating, Add	*51,564.98*	
		For K13 Factor Rating, Add	*73,664.26*	
		For K20 Factor Rating, Add	*95,763.54*	
26 22 13 00-0121	EA	750 KVA, 480 x 208 Y / 120 Volt, 3 Phase, 60 Hertz, General Purpose Dry Type Transformer	185,026.32	2,681.20
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*8,984.20*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*13,476.30*	
		For K4 Factor Rating, Add	*125,778.79*	
		For K13 Factor Rating, Add	*179,683.99*	
		For K20 Factor Rating, Add	*233,589.19*	
26 22 13 00-0122	EA	1,000 KVA, 480 x 208 Y / 120 Volt, 3 Phase, 60 Hertz, General Purpose Dry Type Transformer	245,032.79	2,903.44
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*11,961.30*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*17,941.94*	
		For K4 Factor Rating, Add	*167,458.14*	
		For K13 Factor Rating, Add	*239,225.91*	
		For K20 Factor Rating, Add	*310,993.68*	

26 22 13 00-0123 480 Volt x 208Y/120 Volt, 2-2.5 Percent FCAN And 2-2.5 Percent FCBN Taps *(26 22 13 00-0065)*

26 22 13 00-0124	EA	6 KVA, 480 x 208 Y / 120 Volt, 3 Phase, 60 Hertz, General Purpose Dry Type Transformer	6,343.76	450.03
		For K4 Factor Rating, Add	*3,810.58*	
		For K13 Factor Rating, Add	*5,443.69*	
		For K20 Factor Rating, Add	*7,076.80*	
26 22 13 00-0125	EA	9 KVA, 480 x 208 Y / 120 Volt, 3 Phase, 60 Hertz, General Purpose Dry Type Transformer	7,942.64	479.07
		For K4 Factor Rating, Add	*4,889.16*	
		For K13 Factor Rating, Add	*6,984.51*	
		For K20 Factor Rating, Add	*9,079.86*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 22 13 00-0126	EA	15 KVA, 480 x 208 Y / 120 Volt, 3 Phase, 60 Hertz, General Purpose Dry Type Transformer	10,628.84	522.62
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*479.18*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*718.77*	
		For K4 Factor Rating, Add	*6,708.52*	
		For K13 Factor Rating, Add	*9,583.60*	
		For K20 Factor Rating, Add	*12,458.68*	
26 22 13 00-0127		480 Volt x 480Y/277 Volt, 2-2.5 Percent FCAN And 4 Percent FCBN Taps *(26 22 13 00-0065)*		
26 22 13 00-0128	EA	30 KVA, 480 x 480 Y / 277 Volt, 3 Phase, 60 Hertz, General Purpose Dry Type Transformer	21,316.71	638.75
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*1,001.96*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*1,502.94*	
		For K4 Factor Rating, Add	*14,027.44*	
		For K13 Factor Rating, Add	*20,039.20*	
		For K20 Factor Rating, Add	*26,050.96*	
26 22 13 00-0129	EA	45 KVA, 480 x 480 Y / 277 Volt, 3 Phase, 60 Hertz, General Purpose Dry Type Transformer	23,809.43	754.89
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*1,114.98*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*1,672.47*	
		For K4 Factor Rating, Add	*15,609.75*	
		For K13 Factor Rating, Add	*22,299.64*	
		For K20 Factor Rating, Add	*28,989.53*	
26 22 13 00-0130	EA	75 KVA, 480 x 480 Y / 277 Volt, 3 Phase, 60 Hertz, General Purpose Dry Type Transformer	35,657.17	871.03
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*1,695.76*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*2,543.63*	
		For K4 Factor Rating, Add	*23,740.57*	
		For K13 Factor Rating, Add	*33,915.10*	
		For K20 Factor Rating, Add	*44,089.63*	
26 22 13 00-0131	EA	112.5 KVA, 480 x 480 Y / 277 Volt, 3 Phase, 60 Hertz, General Purpose Dry Type Transformer	44,869.56	1,045.24
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*2,138.95*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*3,208.43*	
		For K4 Factor Rating, Add	*29,945.36*	
		For K13 Factor Rating, Add	*42,779.09*	
		For K20 Factor Rating, Add	*55,612.82*	
26 22 13 00-0132	EA	150 KVA, 480 x 480 Y / 277 Volt, 3 Phase, 60 Hertz, General Purpose Dry Type Transformer	54,253.66	1,161.38
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*2,596.55*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*3,894.82*	
		For K4 Factor Rating, Add	*36,351.64*	
		For K13 Factor Rating, Add	*51,930.91*	
		For K20 Factor Rating, Add	*67,510.18*	
26 22 13 00-0133	EA	225 KVA, 480 x 480 Y / 277 Volt, 3 Phase, 60 Hertz, General Purpose Dry Type Transformer	69,624.59	1,451.72
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*3,336.06*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*5,004.09*	
		For K4 Factor Rating, Add	*46,704.81*	
		For K13 Factor Rating, Add	*66,721.15*	
		For K20 Factor Rating, Add	*86,737.50*	
26 22 13 00-0134	EA	300 KVA, 480 x 480 Y / 277 Volt, 3 Phase, 60 Hertz, General Purpose Dry Type Transformer	84,578.28	1,800.13
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*4,048.90*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*6,073.35*	
		For K4 Factor Rating, Add	*56,684.61*	
		For K13 Factor Rating, Add	*80,978.02*	
		For K20 Factor Rating, Add	*105,271.43*	
26 22 13 00-0135	EA	500 KVA, 480 x 480 Y / 277 Volt, 3 Phase, 60 Hertz, General Purpose Dry Type Transformer	137,415.28	2,206.62
		For Stainless Steel Core With High Magnetic Permeability And Low Loss, Add	*6,650.10*	
		For Silicon Steel Core With High Magnetic Permeability And Low Loss, Add	*9,975.15*	
		For K4 Factor Rating, Add	*93,101.44*	
		For K13 Factor Rating, Add	*133,002.05*	
		For K20 Factor Rating, Add	*172,902.67*	
26 22 13 00-0136		3 Phase 60 Hz K20 Dry Type Transformers *(26 22 13 00-0065)*		
26 22 13 00-0137		3 Phase 60 Hz K20 Dry Type Transformers, 115 C Rise *(26 22 13 00-0136)*		
		Note: 220 C insulation 480 V-208 Y/120 V. 2-2.5 Percent above and 4-2.5 percent taps below.		
26 22 13 00-0138	EA	15 KVA, 480 Volt - 208 Y / 120 Volt, 3 Phase, 60 Hertz, 115 Degree C Temperature Rise, K20 Dry Type Transformer	9,858.43	522.62
26 22 13 00-0139	EA	30 KVA, 480 Volt - 208 Y / 120 Volt, 3 Phase, 60 Hertz, 115 Degree C Temperature Rise, K20 Dry Type Transformer	15,238.07	638.75
26 22 13 00-0140	EA	45 KVA, 480 Volt - 208 Y / 120 Volt, 3 Phase, 60 Hertz, 115 Degree C Temperature Rise, K20 Dry Type Transformer	22,768.11	754.89
26 22 13 00-0141	EA	75 KVA, 480 Volt - 208 Y / 120 Volt, 3 Phase, 60 Hertz, 115 Degree C Temperature Rise, K20 Dry Type Transformer	29,299.15	871.03
26 22 13 00-0142	EA	112.5 KVA, 480 Volt - 208 Y / 120 Volt, 3 Phase, 60 Hertz, 115 Degree C Temperature Rise, K20 Dry Type Transformer	44,598.64	1,045.24
26 22 13 00-0143	EA	150 KVA, 480 Volt - 208 Y / 120 Volt, 3 Phase, 60 Hertz, 115 Degree C Temperature Rise, K20 Dry Type Transformer	54,490.71	1,161.38
26 22 13 00-0144	EA	225 KVA, 480 Volt - 208 Y / 120 Volt, 3 Phase, 60 Hertz, 115 Degree C Temperature Rise, K20 Dry Type Transformer	63,148.04	1,451.72
26 22 13 00-0145	EA	300 KVA, 480 Volt - 208 Y / 120 Volt, 3 Phase, 60 Hertz, 115 Degree C Temperature Rise, K20 Dry Type Transformer	101,417.30	1,800.13
26 22 13 00-0146		3 Phase 60 Hz K20 Dry Type Transformers, 80 C Rise *(26 22 13 00-0136)*		
		Note: 220 C insulation 480 V-208 Y/120 V. 2-2.5 Percent above and 4-2.5 percent taps below.		
26 22 13 00-0147	EA	15 KVA, 480 Volt - 208 Y / 120 Volt, 3 Phase, 60 Hertz, 80 Degree C Temperature Rise, K20 Dry Type Transformer	11,627.83	522.62

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 22 13 00-0148	EA	30 KVA, 480 Volt - 208 Y / 120 Volt, 3 Phase, 60 Hertz, 80 Degree C Temperature Rise, K20 Dry Type Transformer	18,031.87	638.75
26 22 13 00-0149	EA	45 KVA, 480 Volt - 208 Y / 120 Volt, 3 Phase, 60 Hertz, 80 Degree C Temperature Rise, K20 Dry Type Transformer	27,018.07	754.89
26 22 13 00-0150	EA	75 KVA, 480 Volt - 208 Y / 120 Volt, 3 Phase, 60 Hertz, 80 Degree C Temperature Rise, K20 Dry Type Transformer	34,802.10	871.03
26 22 13 00-0151	EA	112.5 KVA, 480 Volt - 208 Y / 120 Volt, 3 Phase, 60 Hertz, 80 Degree C Temperature Rise, K20 Dry Type Transformer	53,098.58	1,045.24
26 22 13 00-0152	EA	150 KVA, 480 Volt - 208 Y / 120 Volt, 3 Phase, 60 Hertz, 80 Degree C Temperature Rise, K20 Dry Type Transformer	64,929.38	1,161.38
26 22 13 00-0153	EA	225 KVA, 480 Volt - 208 Y / 120 Volt, 3 Phase, 60 Hertz, 80 Degree C Temperature Rise, K20 Dry Type Transformer	75,195.26	1,451.72
26 22 13 00-0154	EA	300 KVA, 480 Volt - 208 Y / 120 Volt, 3 Phase, 60 Hertz, 80 Degree C Temperature Rise, K20 Dry Type Transformer	120,982.40	1,800.13

26 22 13 00-0155 NEMA Premium Efficient Dry Type Transformers *(26 22 13 00-0065)*

26 22 13 00-0156 Aluminum Windings, NEMA Premium Efficient Dry Type Transformers *(26 22 13 00-0155)*

Note: Two taps at 2.5%, four at -2.5%.

26 22 13 00-0157 150 Degree C Temperature Rise, Aluminum Windings, NEMA Premium Efficient Dry Type Transformers *(26 22 13 00-0156)*

26 22 13 00-0158	EA	15 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase, K-1, NEMA 2 Enclosure, 150 Degree C Temperature Rise, Aluminum Windings, NEMA Premium Efficient Dry Type Transformer	3,468.81	524.58
26 22 13 00-0159	EA	30 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase, K-1, NEMA 2 Enclosure, 150 Degree C Temperature Rise, Aluminum Windings, NEMA Premium Efficient Dry Type Transformer	4,231.54	641.15
26 22 13 00-0160	EA	45 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase, K-1, NEMA 2 Enclosure, 150 Degree C Temperature Rise, Aluminum Windings, NEMA Premium Efficient Dry Type Transformer	5,099.12	757.73
26 22 13 00-0161	EA	75 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase, K-1, NEMA 2 Enclosure, 150 Degree C Temperature Rise, Aluminum Windings, NEMA Premium Efficient Dry Type Transformer	6,826.48	874.30
26 22 13 00-0162	EA	112.5 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase, K-1, NEMA 2 Enclosure, 150 Degree C Temperature Rise, Aluminum Windings, NEMA Premium Efficient Dry Type Transformer	9,116.22	1,049.17
26 22 13 00-0163	EA	150 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase, K-1, NEMA 2 Enclosure, 150 Degree C Temperature Rise, Aluminum Windings, NEMA Premium Efficient Dry Type Transformer	11,321.24	1,165.75
26 22 13 00-0164	EA	225 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase, K-1, NEMA 2 Enclosure, 150 Degree C Temperature Rise, Aluminum Windings, NEMA Premium Efficient Dry Type Transformer	14,997.85	1,457.18
26 22 13 00-0165	EA	300 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase, K-1, NEMA 2 Enclosure, 150 Degree C Temperature Rise, Aluminum Windings, NEMA Premium Efficient Dry Type Transformer	21,078.90	1,806.90

26 22 13 00-0166 115 Degree C Temperature Rise, Aluminum Windings, NEMA Premium Efficient Dry Type Transformers *(26 22 13 00-0156)*

26 22 13 00-0167	EA	15 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase, K-1, NEMA 2 Enclosure, 115 Degree C Temperature Rise, Aluminum Windings, NEMA Premium Efficient Dry Type Transformer	4,196.81	524.58
26 22 13 00-0168	EA	30 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase, K-1, NEMA 2 Enclosure, 115 Degree C Temperature Rise, Aluminum Windings, NEMA Premium Efficient Dry Type Transformer	5,113.37	641.15
26 22 13 00-0169	EA	45 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase, K-1, NEMA 2 Enclosure, 115 Degree C Temperature Rise, Aluminum Windings, NEMA Premium Efficient Dry Type Transformer	6,174.46	757.73
26 22 13 00-0170	EA	75 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase, K-1, NEMA 2 Enclosure, 115 Degree C Temperature Rise, Aluminum Windings, NEMA Premium Efficient Dry Type Transformer	8,350.08	874.30
26 22 13 00-0171	EA	112.5 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase, K-1, NEMA 2 Enclosure, 115 Degree C Temperature Rise, Aluminum Windings, NEMA Premium Efficient Dry Type Transformer	10,688.82	1,049.17
26 22 13 00-0172	EA	150 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase, K-1, NEMA 2 Enclosure, 115 Degree C Temperature Rise, Aluminum Windings, NEMA Premium Efficient Dry Type Transformer	14,018.17	1,165.75
26 22 13 00-0173	EA	225 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase, K-1, NEMA 2 Enclosure, 115 Degree C Temperature Rise, Aluminum Windings, NEMA Premium Efficient Dry Type Transformer	18,623.14	1,457.18
26 22 13 00-0174	EA	300 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase, K-1, NEMA 2 Enclosure, 115 Degree C Temperature Rise, Aluminum Windings, NEMA Premium Efficient Dry Type Transformer	26,318.43	1,806.90

26 22 13 00-0175 80 Degree C Temperature Rise, Aluminum Windings, NEMA Premium Efficient Dry Type Transformers *(26 22 13 00-0156)*

26 22 13 00-0176	EA	15 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase, K-1, NEMA 2 Enclosure, 80 Degree C Temperature Rise, Aluminum Windings, NEMA Premium Efficient Dry Type Transformer	4,921.87	524.58
26 22 13 00-0177	EA	30 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase, K-1, NEMA 2 Enclosure, 80 Degree C Temperature Rise, Aluminum Windings, NEMA Premium Efficient Dry Type Transformer	5,997.65	641.15
26 22 13 00-0178	EA	45 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase, K-1, NEMA 2 Enclosure, 80 Degree C Temperature Rise, Aluminum Windings, NEMA Premium Efficient Dry Type Transformer	7,249.81	757.73
26 22 13 00-0179	EA	75 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase, K-1, NEMA 2 Enclosure, 80 Degree C Temperature Rise, Aluminum Windings, NEMA Premium Efficient Dry Type Transformer	9,871.24	874.30
26 22 13 00-0180	EA	112.5 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase, K-1, NEMA 2 Enclosure, 80 Degree C Temperature Rise, Aluminum Windings, NEMA Premium Efficient Dry Type Transformer	12,672.93	1,049.17
26 22 13 00-0181	EA	150 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase, K-1, NEMA 2 Enclosure, 80 Degree C Temperature Rise, Aluminum Windings, NEMA Premium Efficient Dry Type Transformer	16,715.09	1,165.75
26 22 13 00-0182	EA	225 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase, K-1, NEMA 2 Enclosure, 80 Degree C Temperature Rise, Aluminum Windings, NEMA Premium Efficient Dry Type Transformer	22,248.44	1,457.18
26 22 13 00-0183	EA	300 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase, K-1, NEMA 2 Enclosure, 80 Degree C Temperature Rise, Aluminum Windings, NEMA Premium Efficient Dry Type Transformer	31,557.96	1,806.90

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 22 13 00-0184		Copper Windings, NEMA Premium Efficient Dry Type Transformers *(26 22 13 00-0155)* Note: Two taps at 2.5%, four at -2.5%.		
26 22 13 00-0185		150 Degree C Temperature Rise, Copper Windings, NEMA Premium Efficient Dry Type Transformers *(26 22 13 00-0184)*		
26 22 13 00-0186	EA	15 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase K-1, NEMA 2 Enclosure, 150 Degree C Temperature Rise, Copper Windings, NEMA Premium Efficient Dry Type Transformer	4,679.36	524.58
26 22 13 00-0187	EA	30 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase K-1, NEMA 2 Enclosure, 150 Degree C Temperature Rise, Copper Windings, NEMA Premium Efficient Dry Type Transformer	5,703.71	641.15
26 22 13 00-0188	EA	45 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase K-1, NEMA 2 Enclosure, 150 Degree C Temperature Rise, Copper Windings, NEMA Premium Efficient Dry Type Transformer	6,889.72	757.73
26 22 13 00-0189	EA	75 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase K-1, NEMA 2 Enclosure, 150 Degree C Temperature Rise, Copper Windings, NEMA Premium Efficient Dry Type Transformer	9,364.18	874.30
26 22 13 00-0190	EA	112.5 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase K-1, NEMA 2 Enclosure, 150 Degree C Temperature Rise, Copper Windings, NEMA Premium Efficient Dry Type Transformer	12,702.32	1,049.17
26 22 13 00-0191	EA	150 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase K-1, NEMA 2 Enclosure, 150 Degree C Temperature Rise, Copper Windings, NEMA Premium Efficient Dry Type Transformer	15,909.20	1,165.75
26 22 13 00-0192	EA	225 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase K-1, NEMA 2 Enclosure, 150 Degree C Temperature Rise, Copper Windings, NEMA Premium Efficient Dry Type Transformer	21,163.30	1,457.18
26 22 13 00-0193	EA	300 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase K-1, NEMA 2 Enclosure, 150 Degree C Temperature Rise, Copper Windings, NEMA Premium Efficient Dry Type Transformer	29,992.71	1,806.90
26 22 13 00-0194		115 Degree C Temperature Rise, Copper Windings, NEMA Premium Efficient Dry Type Transformers *(26 22 13 00-0184)*		
26 22 13 00-0195	EA	15 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase K-1, NEMA 2 Enclosure, 115 Degree C Temperature Rise, Copper Windings, NEMA Premium Efficient Dry Type Transformer	5,404.42	524.58
26 22 13 00-0196	EA	30 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase K-1, NEMA 2 Enclosure, 115 Degree C Temperature Rise, Copper Windings, NEMA Premium Efficient Dry Type Transformer	6,587.99	641.15
26 22 13 00-0197	EA	45 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase K-1, NEMA 2 Enclosure, 115 Degree C Temperature Rise, Copper Windings, NEMA Premium Efficient Dry Type Transformer	7,965.07	757.73
26 22 13 00-0198	EA	75 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase K-1, NEMA 2 Enclosure, 115 Degree C Temperature Rise, Copper Windings, NEMA Premium Efficient Dry Type Transformer	10,887.80	874.30
26 22 13 00-0199	EA	112.5 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase K-1, NEMA 2 Enclosure, 115 Degree C Temperature Rise, Copper Windings, NEMA Premium Efficient Dry Type Transformer	16,562.77	1,049.17
26 22 13 00-0200	EA	150 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase K-1, NEMA 2 Enclosure, 115 Degree C Temperature Rise, Copper Windings, NEMA Premium Efficient Dry Type Transformer	20,871.93	1,165.75
26 22 13 00-0201	EA	225 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase K-1, NEMA 2 Enclosure, 115 Degree C Temperature Rise, Copper Windings, NEMA Premium Efficient Dry Type Transformer	26,640.44	1,457.18
26 22 13 00-0202	EA	300 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase K-1, NEMA 2 Enclosure, 115 Degree C Temperature Rise, Copper Windings, NEMA Premium Efficient Dry Type Transformer	39,665.88	1,806.90
26 22 13 00-0203		80 Degree C Temperature Rise, Copper Windings, NEMA Premium Efficient Dry Type Transformers *(26 22 13 00-0184)*		
26 22 13 00-0204	EA	15 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase K-1, NEMA 2 Enclosure, 80 Degree C Temperature Rise, Copper Windings, NEMA Premium Efficient Dry Type Transformer	6,131.93	524.58
26 22 13 00-0205	EA	30 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase K-1, NEMA 2 Enclosure, 80 Degree C Temperature Rise, Copper Windings, NEMA Premium Efficient Dry Type Transformer	7,472.26	641.15
26 22 13 00-0206	EA	45 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase K-1, NEMA 2 Enclosure, 80 Degree C Temperature Rise, Copper Windings, NEMA Premium Efficient Dry Type Transformer	9,040.40	757.73
26 22 13 00-0207	EA	75 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase K-1, NEMA 2 Enclosure, 80 Degree C Temperature Rise, Copper Windings, NEMA Premium Efficient Dry Type Transformer	12,408.94	874.30
26 22 13 00-0208	EA	112.5 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase K-1, NEMA 2 Enclosure, 80 Degree C Temperature Rise, Copper Windings, NEMA Premium Efficient Dry Type Transformer	19,663.88	1,049.17
26 22 13 00-0209	EA	150 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase K-1, NEMA 2 Enclosure, 80 Degree C Temperature Rise, Copper Windings, NEMA Premium Efficient Dry Type Transformer	25,371.71	1,165.75
26 22 13 00-0210	EA	225 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase K-1, NEMA 2 Enclosure, 80 Degree C Temperature Rise, Copper Windings, NEMA Premium Efficient Dry Type Transformer	32,115.12	1,457.18
26 22 13 00-0211	EA	300 kVA, 480 Volt Delta 208Y/120 Volt, 3 Phase K-1, NEMA 2 Enclosure, 80 Degree C Temperature Rise, Copper Windings, NEMA Premium Efficient Dry Type Transformer	47,391.68	1,806.90
26 22 13 00-0212		3 Phase Weathershields *(26 22 13 00-0065)* Note: Use with type DT-3 and DS-3.		
26 22 13 00-0213	EA	45-112.5 KVA 3 Phase Weathershields With DT-3, DS-3, Set Of 2	2,328.17	
26 22 13 00-0214	EA	150-300 KVA 3 Phase Weathershields With DT-3, DS-3, Set Of 2	3,953.66	
26 22 13 00-0215	EA	500-1,000 KVA 3 Phase Weathershields With DT-3, DS-3, Set Of 2	3,953.66	
26 22 13 00-0216		Three Phase Mounting Brackets *(26 22 13 00-0065)*		
26 22 13 00-0217	EA	3 Phase Mounting Brackets (Set Of 2) For Transformers Up To 112.5 KVA	1,655.03	206.10
26 22 13 00-0218		Foam Core Poly Transformer Pads *(26 22 13)*		
26 22 13 00-0219	EA	Single Phase Foam Core Poly Pads Note: Excludes site prep.	581.12	39.77

26 24 Switchboards and Panelboards *(26 20)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

26 24 13 Switchboards *(26 24)*

Note: Installation of free-standing building distribution switchboards. Switchboard sections to be mounted on 4" concrete pad. Includes material, handling, unloading at job site, assembly and installation, wiring connections, testing and cleanup. Exclude concrete pad and foundation.

26 24 13 00-0001 Fusible Switch Type 240 Volt, 3 Phase, 3 Wire *(26 24 13)*

26 24 13 00-0002 Incoming Service Section Main Device Only *(26 24 13 00-0001)*

Note: Copper bus, non-metering type, with fuses.

26 24 13 00-0003	EA	400 Amperes, 240 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Switch	3,940.78	986.67
26 24 13 00-0004	EA	600 Amperes, 240 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Switch	4,361.17	1,043.63
26 24 13 00-0005	EA	800 Amperes, 240 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Switch	7,035.04	1,183.85
26 24 13 00-0006	EA	1,200 Amperes, 240 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Switch	7,578.11	1,269.12
26 24 13 00-0007	EA	1,600 Amperes, 240 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Switch	12,147.75	1,353.16
26 24 13 00-0008	EA	2,000 Amperes, 240 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Switch	13,544.64	1,438.77
26 24 13 00-0009	EA	400 Amperes, 240 Volt, 3 Phase, 4 Wire, Distribution Switchboard With MC Main Breaker	4,767.52	986.67
26 24 13 00-0010	EA	600 Amperes, 240 Volt, 3 Phase, 4 Wire, Distribution Switchboard With MC Main Breaker	6,103.52	1,043.63
26 24 13 00-0011	EA	800 Amperes, 240 Volt, 3 Phase, 4 Wire, Distribution Switchboard With MC Main Breaker	8,502.37	1,184.86
26 24 13 00-0012	EA	1,200 Amperes, 240 Volt, 3 Phase, 4 Wire, Distribution Switchboard With MC Main Breaker	11,624.59	1,269.12
26 24 13 00-0013	EA	1,600 Amperes, 240 Volt, 3 Phase, 4 Wire, Distribution Switchboard With MC Main Breaker	12,147.75	1,354.51
26 24 13 00-0014	EA	2,000 Amperes, 240 Volt, 3 Phase, 4 Wire, Distribution Switchboard With MC Main Breaker	13,544.64	1,438.77
26 24 13 00-0015	EA	2,500 Amperes, 240 Volt, 3 Phase, 4 Wire, Distribution Switchboard With MC Main Breaker	16,274.34	1,504.20
26 24 13 00-0016	EA	3,000 Amperes, 240 Volt, 3 Phase, 4 Wire, Distribution Switchboard With MC Main Breaker	18,447.65	1,611.47
26 24 13 00-0017	EA	4,000 Amperes, 240 Volt, 3 Phase, 4 Wire, Distribution Switchboard With MC Main Breaker	21,772.64	1,737.13
26 24 13 00-0018	EA	400 Amperes, 240 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Lug	2,678.91	874.20
26 24 13 00-0019	EA	600 Amperes, 240 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Lug	2,958.70	930.71
26 24 13 00-0020	EA	800 Amperes, 240 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Lug	3,389.05	1,071.38
26 24 13 00-0021	EA	1,000 Amperes, 240 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Lug	3,653.45	1,116.39
26 24 13 00-0022	EA	1,200 Amperes, 240 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Lug	3,889.50	1,156.66
26 24 13 00-0023	EA	1,600 Amperes, 240 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Lug	4,261.32	1,240.13
26 24 13 00-0024	EA	2,000 Amperes, 240 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Lug	4,607.33	1,325.18

26 24 13 00-0025 Branch Breaker Units *(26 24 13 00-0001)*

Note: Includes branch breaker(s) and portion of distribution section occupied by that breaker. 240 V, 3 pole. Use upper range to determine breaker unless designing for future expansion.

26 24 13 00-0026	EA	15 To 60 Amperes, 240 Volt, MC Branch Breaker	337.11	34.40
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.64*	
26 24 13 00-0027	EA	70 To 100 Amperes, 240 Volt, MC Branch Breaker	493.99	54.15
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*32.49*	
26 24 13 00-0028	EA	125 To 225 Amperes, 240 Volt, MC Branch Breaker	1,325.99	98.70
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*59.22*	
26 24 13 00-0029	EA	100 To 400 Amperes, 240 Volt, MC Branch Breaker	2,353.37	128.60
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*77.15*	
26 24 13 00-0030	EA	300 To 600 Amperes, 240 Volt, MC Branch Breaker	4,193.42	315.84
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*189.47*	
26 24 13 00-0031	EA	400 To 800 Amperes, 240 Volt, MC Branch Breaker	6,710.53	315.84
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*189.47*	
26 24 13 00-0032	EA	600 To 1,200 Amperes, 240 Volt, MC Branch Breaker	10,880.58	562.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*337.73*	

26 24 13 00-0033 Fusible Switch Type 480 Volt, 3 Phase, 3 Wire *(26 24 13)*

26 24 13 00-0034 Incoming Service Section Main Device Only *(26 24 13 00-0033)*

Note: Copper bus, non-metering type, with fuses.

26 24 13 00-0035	EA	400 Amperes, 480 Volt, 3 Phase, 3 Wire, Distribution Switchboard With Main Switch	5,578.31	1,280.29
26 24 13 00-0036	EA	600 Amperes, 480 Volt, 3 Phase, 3 Wire, Distribution Switchboard With Main Switch	6,230.20	1,280.29
26 24 13 00-0037	EA	800 Amperes, 480 Volt, 3 Phase, 3 Wire, Distribution Switchboard With Main Switch	9,223.02	1,663.81
26 24 13 00-0038	EA	1,200 Amperes, 480 Volt, 3 Phase, 3 Wire, Distribution Switchboard With Main Switch	10,450.35	1,663.81

26 24 13 00-0039 Fusible Switch Type 120/240 Volt, 1 Phase, 3 Wire *(26 24 13)*

26 24 13 00-0040 Incoming Service Section Main Device Only *(26 24 13 00-0039)*

Note: Copper bus, non-metering type, with fuses.

26 24 13 00-0041	EA	200/400 Amperes, 120/240 Volt, 1 Phase, 3 Wire, Distribution Switchboard With Main Switch	3,545.99	874.20
26 24 13 00-0042	EA	600 Amperes, 120/240 Volt, 1 Phase, 3 Wire, Distribution Switchboard With Main Switch	3,947.53	930.71
26 24 13 00-0043	EA	800 Amperes, 120/240 Volt, 1 Phase, 3 Wire, Distribution Switchboard With Main Switch	6,041.78	1,071.38
26 24 13 00-0044	EA	1,200 Amperes, 120/240 Volt, 1 Phase, 3 Wire, Distribution Switchboard With Main Switch	6,564.24	1,155.75
26 24 13 00-0045	EA	200/400 Amperes, 120/240 Volt, 1 Phase, 3 Wire, Distribution Switchboard With MC Main Breaker	4,330.80	874.20
26 24 13 00-0046	EA	600 Amperes, 120/240 Volt, 1 Phase, 3 Wire, Distribution Switchboard With MC Main Breaker	5,466.84	930.71
26 24 13 00-0047	EA	800 Amperes, 120/240 Volt, 1 Phase, 3 Wire, Distribution Switchboard With MC Main Breaker	7,671.78	1,071.38
26 24 13 00-0048	EA	1,200 Amperes, 120/240 Volt, 1 Phase, 3 Wire, Distribution Switchboard With MC Main Breaker	11,009.83	1,155.75
26 24 13 00-0049	EA	2,000 Amperes, 120/240 Volt, 1 Phase, 3 Wire, Distribution Switchboard With MC Main Breaker	12,924.33	1,297.21
26 24 13 00-0050	EA	200/400 Amperes, 120/240 Volt, 1 Phase, 3 Wire, Distribution Switchboard With Main Lug	2,485.25	761.29
26 24 13 00-0051	EA	600 Amperes, 120/240 Volt, 1 Phase, 3 Wire, Distribution Switchboard With Main Lug	2,784.45	817.92
26 24 13 00-0052	EA	800 Amperes, 120/240 Volt, 1 Phase, 3 Wire, Distribution Switchboard With Main Lug	3,268.69	958.58
26 24 13 00-0053	EA	1,000 Amperes, 120/240 Volt, 1 Phase, 3 Wire, Distribution Switchboard With Main Lug	3,518.05	1,003.59
26 24 13 00-0054	EA	1,200 Amperes, 120/240 Volt, 1 Phase, 3 Wire, Distribution Switchboard With Main Lug	3,759.28	1,043.63
26 24 13 00-0055	EA	1,600 Amperes, 120/240 Volt, 1 Phase, 3 Wire, Distribution Switchboard With Main Lug	4,079.11	1,116.39
26 24 13 00-0056	EA	2,000 Amperes, 120/240 Volt, 1 Phase, 3 Wire, Distribution Switchboard With Main Lug	4,391.85	1,183.85
26 24 13 00-0057	EA	2,500 Amperes, 120/240 Volt, 1 Phase, 3 Wire, Distribution Switchboard With Main Lug	5,451.65	1,466.41

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 13 00-0058	EA	3,000 Amperes, 120/240 Volt, 1 Phase, 3 Wire, Distribution Switchboard With Main Lug	6,101.53	1,607.40
26 24 13 00-0059	EA	4,000 Amperes, 120/240 Volt, 1 Phase, 3 Wire, Distribution Switchboard With Main Lug	7,176.58	1,734.31
26 24 13 00-0060		**Branch Breaker Units** *(26 24 13 00-0039)*		
		Note: Includes branch breaker(s) and portion of distribution section occupied by that breaker. 240 V, 2 pole. Use upper range to determine breaker unless designing for future expansion.		
26 24 13 00-0061	EA	15 To 60 Amperes, 120 / 240 Volt, MC Branch Breaker	181.53	29.89
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*17.93*	
26 24 13 00-0062	EA	70 To 100 Amperes, 120 / 240 Volt, MC Branch Breaker	288.43	49.63
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*29.78*	
26 24 13 00-0063	EA	125 To 225 Amperes, 120 / 240 Volt, MC Branch Breaker	876.61	69.37
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*41.63*	
26 24 13 00-0064	EA	100 To 400 Amperes, 120 / 240 Volt, MC Branch Breaker	2,517.57	89.11
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*53.47*	
26 24 13 00-0065	EA	300 To 600 Amperes, 120/240 Volt, MC Branch Breaker	3,967.59	217.14
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*130.28*	
26 24 13 00-0066	EA	400 To 800 Amperes, 120/240 Volt, MC Branch Breaker	5,637.83	217.14
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*130.28*	
26 24 13 00-0067	EA	600 To 1,200 Amperes, 120/240 Volt, MC Branch Breaker	9,297.77	414.55
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*248.75*	
26 24 13 00-0068		**Fusible Switch Type 120/208 Volt, 3 Phase, 4 Wire** *(26 24 13)*		
26 24 13 00-0069		**Incoming Service Section Main Device Only** *(26 24 13 00-0068)*		
		Note: Copper bus, non-metering type, with fuses.		
26 24 13 00-0070	EA	400 Amperes, 120/208 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Switch	3,942.15	986.67
26 24 13 00-0071	EA	600 Amperes, 120/208 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Switch	4,359.63	1,043.63
26 24 13 00-0072	EA	800 Amperes, 120/208 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Switch	7,033.05	1,183.85
26 24 13 00-0073	EA	1,200 Amperes, 120/208 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Switch	7,575.83	1,269.12
26 24 13 00-0074	EA	1,600 Amperes, 120/208 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Switch	12,142.55	1,353.16
26 24 13 00-0075	EA	2,000 Amperes, 120/208 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Switch	13,544.64	1,438.77
26 24 13 00-0076	EA	400 Amperes, 120/208 Volt, 3 Phase, 4 Wire, Distribution Switchboard With MC Main Breaker	4,768.89	986.67
26 24 13 00-0077	EA	600 Amperes, 120/208 Volt, 3 Phase, 4 Wire, Distribution Switchboard With MC Main Breaker	6,101.98	1,043.63
26 24 13 00-0078	EA	800 Amperes, 120/208 Volt, 3 Phase, 4 Wire, Distribution Switchboard With MC Main Breaker	8,502.37	1,184.86
26 24 13 00-0079	EA	1,200 Amperes, 120/208 Volt, 3 Phase, 4 Wire, Distribution Switchboard With MC Main Breaker	11,622.31	1,269.12
26 24 13 00-0080	EA	1,600 Amperes, 120/208 Volt, 3 Phase, 4 Wire, Distribution Switchboard With MC Main Breaker	12,145.14	1,354.51
26 24 13 00-0081	EA	2,000 Amperes, 120/208 Volt, 3 Phase, 4 Wire, Distribution Switchboard With MC Main Breaker	13,544.64	1,438.77
26 24 13 00-0082	EA	400 Amperes, 120/208 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Lug	2,809.81	874.20
26 24 13 00-0083	EA	600 Amperes, 120/208 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Lug	3,140.91	930.71
26 24 13 00-0084	EA	800 Amperes, 120/208 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Lug	3,662.19	1,071.38
26 24 13 00-0085	EA	1,000 Amperes, 120/208 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Lug	3,939.93	1,116.39
26 24 13 00-0086	EA	1,200 Amperes, 120/208 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Lug	4,208.33	1,156.66
26 24 13 00-0087	EA	1,600 Amperes, 120/208 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Lug	4,568.02	1,240.13
26 24 13 00-0088	EA	2,000 Amperes, 120/208 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Lug	4,932.71	1,325.18
26 24 13 00-0089	EA	2,500 Amperes, 120/208 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Lug	5,854.67	1,505.88
26 24 13 00-0090	EA	3,000 Amperes, 120/208 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Lug	6,477.08	1,611.35
26 24 13 00-0091	EA	4,000 Amperes, 120/208 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Lug	7,645.43	1,731.49
26 24 13 00-0092		**Branch Breaker Units** *(26 24 13 00-0068)*		
		Note: Includes branch breaker(s) and portion of distribution section occupied by that breaker. 120/208 V, 3 pole. Use upper range to determine breaker unless designing for future expansion.		
26 24 13 00-0093	EA	15 To 60 Amperes, 120/208 Volt, MC Branch Breaker	337.11	34.40
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.64*	
26 24 13 00-0094	EA	70 To 100 Amperes, 120/208 Volt, MC Branch Breaker	493.99	54.15
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*32.49*	
26 24 13 00-0095	EA	125 To 225 Amperes, 120/208 Volt, MC Branch Breaker	1,325.99	98.70
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*59.22*	
26 24 13 00-0096	EA	100 To 400 Amperes, 120/208 Volt, MC Branch Breaker	2,353.37	128.60
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*77.15*	
26 24 13 00-0097	EA	300 To 600 Amperes, 120/208 Volt, MC Branch Breaker	4,193.42	315.84
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*189.47*	
26 24 13 00-0098	EA	400 To 800 Amperes, 120/208 Volt, MC Branch Breaker	6,710.53	315.84
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*189.47*	
26 24 13 00-0099	EA	600 To 1,200 Amperes, 120/208 Volt, MC Branch Breaker	10,880.58	562.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*337.73*	
26 24 13 00-0100		**Fusible Switch Type 277/480 Volt, 3 Phase, 4 Wire** *(26 24 13)*		
26 24 13 00-0101		**Incoming Service Section Main Device Only** *(26 24 13 00-0100)*		
		Note: Copper bus, non-metering type, with fuses.		
26 24 13 00-0102	EA	400 Amperes, 480/277 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Switch	5,111.10	1,353.16
26 24 13 00-0103	EA	600 Amperes, 480/277 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Switch	5,609.31	1,438.77
26 24 13 00-0104	EA	800 Amperes, 480/277 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Switch	7,972.72	1,605.94
26 24 13 00-0105	EA	1,200 Amperes, 480/277 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Switch	8,714.73	1,719.53
26 24 13 00-0106	EA	400 Amperes, 480/277 Volt, 3 Phase, 4 Wire, Distribution Switchboard With MC Main Breaker	6,514.70	1,353.16
26 24 13 00-0107	EA	600 Amperes, 480/277 Volt, 3 Phase, 4 Wire, Distribution Switchboard With MC Main Breaker	8,755.27	1,438.77
26 24 13 00-0108	EA	800 Amperes, 480/277 Volt, 3 Phase, 4 Wire, Distribution Switchboard With MC Main Breaker	9,919.97	1,607.74
26 24 13 00-0109	EA	1,200 Amperes, 480/277 Volt, 3 Phase, 4 Wire, Distribution Switchboard With MC Main Breaker	12,523.08	1,719.53
26 24 13 00-0110	EA	1,600 Amperes, 480/277 Volt, 3 Phase, 4 Wire, Distribution Switchboard With MC Main Breaker	13,103.31	1,833.57

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 13 00-0111	EA	2,000 Amperes, 480/277 Volt, 3 Phase, 4 Wire, Distribution Switchboard With MC Main Breaker	14,562.13	1,947.50
26 24 13 00-0112	EA	400 Amperes, 480/277 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Lug	2,809.81	874.20
26 24 13 00-0113	EA	600 Amperes, 480/277 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Lug	3,140.91	930.71
26 24 13 00-0114	EA	800 Amperes, 480/277 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Lug	3,662.19	1,071.38
26 24 13 00-0115	EA	1,000 Amperes, 480/277 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Lug	3,939.93	1,116.39
26 24 13 00-0116	EA	1,200 Amperes, 480/277 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Lug	4,208.33	1,156.66
26 24 13 00-0117	EA	1,600 Amperes, 480/277 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Lug	4,568.02	1,240.13
26 24 13 00-0118	EA	2,000 Amperes, 480/277 Volt, 3 Phase, 4 Wire, Distribution Switchboard With Main Lug	4,932.71	1,325.18

26 24 13 00-0119 Branch Breaker Units *(26 24 13 00-0100)*

Note: Includes branch breaker(s) and portion of distribution section occupied by that breaker. 480 V, 3 pole. Use upper range to determine breaker unless designing for future expansion.

26 24 13 00-0120	EA	15 To 60 Amperes, 480/277 Volt, MC Branch Breaker	697.66	34.40
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.64*	
26 24 13 00-0121	EA	70 To 100 Amperes, 480/277 Volt, MC Branch Breaker	804.22	54.15
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*32.49*	
26 24 13 00-0122	EA	125 To 225 Amperes, 480/277 Volt, MC Branch Breaker	1,458.47	98.70
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*59.22*	
26 24 13 00-0123	EA	100 To 400 Amperes, 480/277 Volt, MC Branch Breaker	2,353.37	128.60
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*77.15*	
26 24 13 00-0124	EA	300 To 600 Amperes, 480/277 Volt, MC Branch Breaker	5,638.95	315.84
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*189.47*	
26 24 13 00-0125	EA	400 To 800 Amperes, 480/277 Volt, MC Branch Breaker	5,768.08	315.84
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*189.47*	
26 24 13 00-0126	EA	600 To 1,200 Amperes, 480/277 Volt, MC Branch Breaker	9,255.62	562.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*337.73*	

26 24 13 00-0127 Fusible Branch Circuit Switch *(26 24 13)*

Note: Includes switch fuses, and portion of distribution section occupied by that branch device.

26 24 13 00-0128 240 Volt, 2 Pole Twin Branch Switch Units *(26 24 13 00-0127)*

26 24 13 00-0129	EA	30/30 Amperes, 240 Volt, 2 Pole Twin Branch Switch Unit	719.04	88.55
		For Electrical Interlock Kit, Add	*293.16*	
26 24 13 00-0130	EA	30/60 Amperes, 240 Volt, 2 Pole Twin Branch Switch Unit	716.53	88.55
		For Electrical Interlock Kit, Add	*293.16*	
26 24 13 00-0131	EA	60/60 Amperes, 240 Volt, 2 Pole Twin Branch Switch Unit	716.53	88.55
		For Electrical Interlock Kit, Add	*293.16*	
26 24 13 00-0132	EA	60/100 Amperes, 240 Volt, 2 Pole Twin Branch Switch Unit	1,124.49	116.75
		For Electrical Interlock Kit, Add	*293.16*	
26 24 13 00-0133	EA	100/100 Amperes, 240 Volt, 2 Pole Twin Branch Switch Unit	1,124.49	116.75
		For Electrical Interlock Kit, Add	*293.16*	

26 24 13 00-0134 240 Volt, 2 Pole Single Branch Switch Units *(26 24 13 00-0127)*

26 24 13 00-0135	EA	100 Amperes, 240 Volt, 2 Pole Single Branch Switch Unit	822.44	86.86
		For Electrical Interlock Kit, Add	*280.84*	
26 24 13 00-0136	EA	200 Amperes, 240 Volt, 2 Pole Single Branch Switch Unit	1,199.04	86.86
		For Electrical Interlock Kit, Add	*280.84*	
26 24 13 00-0137	EA	400 Amperes, 240 Volt, 2 Pole Single Branch Switch Unit	3,081.95	234.06

26 24 13 00-0138 240 Volt, 3 Pole Twin Branch Switch Units *(26 24 13 00-0127)*

26 24 13 00-0139	EA	30/30 Amperes, 240 Volt, 3 Pole Twin Branch Switch Unit	921.36	99.83
		For Electrical Interlock Kit, Add	*293.16*	
26 24 13 00-0140	EA	30/60 Amperes, 240 Volt, 3 Pole Twin Branch Switch Unit	918.85	99.83
		For Electrical Interlock Kit, Add	*293.16*	
26 24 13 00-0141	EA	60/60 Amperes, 240 Volt, 3 Pole Twin Branch Switch Unit	918.85	99.83
		For Electrical Interlock Kit, Add	*293.16*	
26 24 13 00-0142	EA	60/100 Amperes, 240 Volt, 3 Pole Twin Branch Switch Unit	1,384.11	133.67
		For Electrical Interlock Kit, Add	*293.16*	
26 24 13 00-0143	EA	100/100 Amperes, 240 Volt, 3 Pole Twin Branch Switch Unit	1,384.11	133.67
		For Electrical Interlock Kit, Add	*293.16*	

26 24 13 00-0144 240 Volt, 3 Pole Single Branch Switch Units *(26 24 13 00-0127)*

26 24 13 00-0145	EA	100 Amperes, 240 Volt, 3 Pole Single Branch Switch Unit	996.08	98.13
		For Electrical Interlock Kit, Add	*293.16*	
26 24 13 00-0146	EA	200 Amperes, 240 Volt, 3 Pole Single Branch Switch Unit	1,610.00	98.13
		For Electrical Interlock Kit, Add	*280.84*	
26 24 13 00-0147	EA	400 Amperes, 240 Volt, 3 Pole Single Branch Switch Unit	4,127.52	262.03
26 24 13 00-0148	EA	600 Amperes, 240 Volt, 3 Pole Single Branch Switch Unit	5,894.15	335.70
26 24 13 00-0149	EA	800 Amperes, 240 Volt, 3 Pole Single Branch Switch Unit	10,969.98	454.81

26 24 13 00-0150 600 Volt, 3 Pole Twin Branch Switch Units *(26 24 13 00-0127)*

26 24 13 00-0151	EA	30/30 Amperes, 600 Volt, 3 Pole Twin Branch Switch Unit	1,301.52	99.83
		For Electrical Interlock Kit, Add	*293.16*	
26 24 13 00-0152	EA	30/60 Amperes, 600 Volt, 3 Pole Twin Branch Switch Unit	1,298.98	99.83
		For Electrical Interlock Kit, Add	*293.16*	
26 24 13 00-0153	EA	60/60 Amperes, 600 Volt, 3 Pole Twin Branch Switch Unit	1,301.52	99.83
		For Electrical Interlock Kit, Add	*293.16*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 13 00-0154	EA	60/100 Amperes, 600 Volt, 3 Pole Twin Branch Switch Unit	1,957.71	133.67
		For Electrical Interlock Kit, Add	*293.16*	
26 24 13 00-0155	EA	100/100 Amperes, 600 Volt, 3 Pole Twin Branch Switch Unit	2,000.16	133.67
		For Electrical Interlock Kit, Add	*293.16*	
26 24 13 00-0156	EA	200/200 Amperes, 600 Volt, 3 Pole Twin Branch Switch Unit	4,258.44	174.84
		For Electrical Interlock Kit, Add	*293.16*	
26 24 13 00-0157		600 Volt, 3 Pole, Single Branch Switch Units *(26 24 13 00-0127)*		
26 24 13 00-0158	EA	100 Amperes, 600 Volt, 3 Pole Single Branch Switch Unit	1,405.53	98.13
		For Electrical Interlock Kit, Add	*293.16*	
26 24 13 00-0159	EA	200 Amperes, 600 Volt, 3 Pole Single Branch Switch Unit	2,129.81	98.13
		For Electrical Interlock Kit, Add	*280.84*	
26 24 13 00-0160	EA	400 Amperes, 600 Volt, 3 Pole Single Branch Switch Unit	5,181.91	262.03
		For Electrical Interlock Kit, Add	*280.84*	
26 24 13 00-0161	EA	600 Amperes, 600 Volt, 3 Pole Single Branch Switch Unit	6,293.24	335.70
26 24 13 00-0162	EA	800 Amperes, 600 Volt, 3 Pole Single Branch Switch Unit	10,969.98	454.81
26 24 13 00-0163		Service And Distribution Structures *(26 24 13)*		
26 24 13 00-0164		Distribution Section 600 Volt, 250 Volt DC *(26 24 13 00-0163)*		
26 24 13 00-0165		600 Amperes, 4 Wire, Main Bus *(26 24 13 00-0164)*		
26 24 13 00-0166	EA	14 Watt Distribution Section, 600 Amperes, 4 Wire, 600 Volt AC, 250 Volt DC, Main Bus	2,631.70	1,037.77
26 24 13 00-0167	EA	24 To 30 Watt Distribution Section, 600 Amperes, 4 Wire, 600 Volt AC, 250 Volt DC, Main Bus	3,138.31	1,037.77
26 24 13 00-0168	EA	34 To 38 Watt Distribution Section, 600 Amperes, 4 Wire, 600 Volt AC, 250 Volt DC, Main Bus	3,494.97	1,319.77
26 24 13 00-0169	EA	42 To 48 Watt Distribution Section, 600 Amperes, 4 Wire, 600 Volt AC, 250 Volt DC, Main Bus	3,859.38	1,319.77
26 24 13 00-0170		800 Amperes, 4 Wire, Main Bus *(26 24 13 00-0164)*		
26 24 13 00-0171	EA	14 Watt Distribution Section, 800 Amperes, 4 Wire, 600 Volt AC, 250 Volt DC, Main Bus	2,963.33	1,201.33
26 24 13 00-0172	EA	24 To 30 Watt Distribution Section, 800 Amperes, 4 Wire, 600 Volt AC, 250 Volt DC, Main Bus	3,455.54	1,201.33
26 24 13 00-0173	EA	34 To 38 Watt Distribution Section, 800 Amperes, 4 Wire, 600 Volt AC, 250 Volt DC, Main Bus	3,859.38	1,488.96
26 24 13 00-0174	EA	42 To 48 Watt Distribution Section, 800 Amperes, 4 Wire, 600 Volt AC, 250 Volt DC, Main Bus	4,186.74	1,488.96
26 24 13 00-0175		1,200 Amperes, 4 Wire, Main Bus *(26 24 13 00-0164)*		
26 24 13 00-0176	EA	14 Watt Distribution Section, 1,200 Amperes, 4 Wire, 600 Volt AC, 250 Volt DC, Main Bus	3,476.62	1,466.41
26 24 13 00-0177	EA	24 To 30 Watt Distribution Section, 1,200 Amperes, 4 Wire, 600 Volt AC, 250 Volt DC, Main Bus	3,981.13	1,466.41
26 24 13 00-0178	EA	34 To 38 Watt Distribution Section, 1,200 Amperes, 4 Wire, 600 Volt AC, 250 Volt DC, Main Bus	4,410.56	1,804.81
26 24 13 00-0179	EA	42 To 48 Watt Distribution Section, 1,200 Amperes, 4 Wire, 600 Volt AC, 250 Volt DC, Main Bus	4,890.16	1,804.81
26 24 13 00-0180		1,600 Amperes, 4 Wire, Main Bus *(26 24 13 00-0164)*		
26 24 13 00-0181	EA	14 Watt Distribution Section, 1,600 Amperes, 4 Wire, 600 Volt AC, 250 Volt DC, Main Bus	4,288.31	1,607.40
26 24 13 00-0182	EA	24 To 30 Watt Distribution Section, 1,600 Amperes, 4 Wire, 600 Volt AC, 250 Volt DC, Main Bus	4,891.42	1,607.40
26 24 13 00-0183	EA	34 To 38 Watt Distribution Section, 1,600 Amperes, 4 Wire, 600 Volt AC, 250 Volt DC, Main Bus	5,402.02	1,985.29
26 24 13 00-0184	EA	42 To 48 Watt Distribution Section, 1,600 Amperes, 4 Wire, 600 Volt AC, 250 Volt DC, Main Bus	5,819.81	1,985.29
26 24 13 00-0185		2,000 Amperes, 4 Wire, Main Bus *(26 24 13 00-0164)*		
26 24 13 00-0186	EA	14 Watt Distribution Section, 2,000 Amperes, 4 Wire, 600 Volt AC, 250 Volt DC, Main Bus	4,497.43	1,613.05
26 24 13 00-0187	EA	24 To 30 Watt Distribution Section, 2,000 Amperes, 4 Wire, 600 Volt AC, 250 Volt DC, Main Bus	5,149.66	1,816.09
26 24 13 00-0188	EA	34 To 38 Watt Distribution Section, 2,000 Amperes, 4 Wire, 600 Volt AC, 250 Volt DC, Main Bus	5,257.41	1,816.09
26 24 13 00-0189	EA	42 To 48 Watt Distribution Section, 2,000 Amperes, 4 Wire, 600 Volt AC, 250 Volt DC, Main Bus	5,478.77	1,917.61
26 24 13 00-0190		3,000 Amperes, 4 Wire, Main Bus *(26 24 13 00-0164)*		
26 24 13 00-0191	EA	24 To 30 Watt Distribution Section, 3,000 Amperes, 4 Wire, 600 Volt AC, 250 Volt DC, Main Bus	6,174.11	1,816.09
26 24 13 00-0192	EA	34 To 38 Watt Distribution Section, 3,000 Amperes, 4 Wire, 600 Volt AC, 250 Volt DC, Main Bus	6,280.26	1,816.09
26 24 13 00-0193	EA	42 To 48 Watt Distribution Section, 3,000 Amperes, 4 Wire, 600 Volt AC, 250 Volt DC, Main Bus	6,501.62	1,917.61
26 24 13 00-0194		4,000 Amperes, 4 Wire, Main Bus *(26 24 13 00-0164)*		
26 24 13 00-0195	EA	24 To 30 Watt Distribution Section, 4,000 Amperes, 4 Wire, 600 Volt AC, 250 Volt DC, Main Bus	6,318.72	1,917.61
26 24 13 00-0196	EA	34 To 38 Watt Distribution Section, 4,000 Amperes, 4 Wire, 600 Volt AC, 250 Volt DC, Main Bus	6,501.62	1,917.61
26 24 13 00-0197	EA	42 To 48 Watt Distribution Section, 4,000 Amperes, 4 Wire, 600 Volt AC, 250 Volt DC, Main Bus	6,581.55	1,917.61
26 24 13 00-0198		Pull Boy, Horizontal Mounted Across Top Of Switch Board *(26 24 13 00-0164)*		
26 24 13 00-0199	EA	18 - 24" Wide, 30" High, Open Bottom, Pull Boy Horizontal Mounted, Top Of Switchboard	556.91	135.36
26 24 13 00-0200	EA	Drilled Bottom For Pull Boy	627.97	135.36
26 24 13 00-0201	EA	Cable Supports In Pull Box	223.49	33.84
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*18.80*	
26 24 13 00-0202		Underground Pull Sections *(26 24 13 00-0164)*		
		Note: Excludes no bus or terminal.		
26 24 13 00-0203	EA	12 To 20" Wide, 15 - 20" Deep, Underground Pull Section Without Bus Or Terminal	541.12	157.93

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 13 00-0204	EA	24 To 28" Wide, 20" Deep, Underground Pull Section Without Bus Or Terminal	933.75	203.04
26 24 13 00-0205	EA	24 To 28" Wide, 30" Deep, Underground Pull Section Without Bus Or Terminal	933.75	203.04
26 24 13 00-0206	EA	14 To 20" Wide, 36" Deep, Underground Pull Section Without Bus Or Terminal	700.27	157.93
26 24 13 00-0207	EA	28 To 30" Wide, 36" Deep, Underground Pull Section Without Bus Or Terminal	1,000.39	231.24
26 24 13 00-0208	EA	14 To 20" Wide, 42 - 60" Deep, Underground Pull Section Without Bus Or Terminal	1,142.49	231.24
26 24 13 00-0209	EA	26 To 30" Wide, 42 - 60" Deep, Underground Pull Section Without Bus Or Terminal	1,198.50	298.92
26 24 13 00-0210	EA	38" Wide, 42 - 60" Deep, Underground Pull Section Without Bus Or Terminal	1,266.75	298.92

26 24 13 00-0211 Switchboard Sections *(26 24 13 00-0163)*

26 24 13 00-0212	EA	600 Amperes, 480 Volt, 4 Wire, Switchboard Incoming No Switch Circuit	4,342.45	939.97
26 24 13 00-0213	EA	800 Amperes, 480 Volt, 4 Wire, Switchboard Incoming No Switch Circuit	4,755.75	1,021.75
26 24 13 00-0214	EA	1,200 Amperes, 480 Volt, 4 Wire, Switchboard Incoming No Switch Circuit	5,965.76	1,305.56
26 24 13 00-0215	EA	1,600 Amperes, 480 Volt, 4 Wire, Switchboard Incoming No Switch Circuit	6,524.33	1,424.22
26 24 13 00-0216	EA	2,000 Amperes, 480 Volt, 4 Wire, Switchboard Incoming No Switch Circuit	6,957.92	1,516.16
26 24 13 00-0217	EA	400 Amperes, 480 Volt, Switchboard Incoming For Switch Circuit Section	5,146.52	824.57
26 24 13 00-0218	EA	200 Amperes, Distribution Section Subfeeder Lug-Rated	2,951.36	783.28
26 24 13 00-0219	EA	400 Amperes, Distribution Section Subfeeder Lug-Rated	3,269.05	849.39
26 24 13 00-0220	EA	120/208 Or 277/480 Volt, 4 Wire, Distribution Section Aluminum Bus	9,841.15	939.97
26 24 13 00-0221	EA	800 Amperes, Switchboard Distribution Section Aluminum Bus Less Breaker	10,524.98	942.45
26 24 13 00-0222	EA	1,000 Amperes, Switchboard Distribution Section Aluminum Bus Less Breaker	11,535.99	1,052.20
26 24 13 00-0223	EA	15 To 60 Amperes, 240 Volt, 1 Phase, Feed Section Circuit Breaker FA Frame	166.21	56.40
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*34.45*	
26 24 13 00-0224	EA	70 To 100 Amperes, 240 Volt, 3 Phase, Feed Section Circuit Breaker FA Frame	202.72	57.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*40.69*	
26 24 13 00-0225	EA	70 To 225 Amperes, 480 Volt, 3 Phase, Feed Section Circuit Breaker KA Frame	927.46	67.79
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*87.67*	
26 24 13 00-0226	EA	125 To 400 Amperes, 480 Volt, 3 Phase, Feed Section Circuit Breaker LA Frame	1,534.66	146.08
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*122.08*	
26 24 13 00-0227	EA	100 Amperes, 240 Volt HIC, 3 Phase, Switchboard Feed Section Branch Circuit Breaker	613.28	203.49
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*70.50*	
26 24 13 00-0228	EA	225 Amperes, 240 Volt HIC, 3 Phase, Switchboard Feed Section Branch Circuit Breaker	1,719.74	117.54
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*87.67*	

26 24 13 00-0229 Switchboard, Structure Per Section Copper, 480 Volt *(26 24 13 00-0163)*

26 24 13 00-0230	EA	225 Amperes, 480 Volt, Copper, Structure Per Section, Switchboard	2,251.26	489.55
26 24 13 00-0231	EA	400 Amperes, 480 Volt, Copper, Structure Per Section, Switchboard	3,200.08	662.02
26 24 13 00-0232	EA	600 Amperes, 480 Volt, Copper, Structure Per Section, Switchboard	3,594.23	805.74
26 24 13 00-0233	EA	800 Amperes, 480 Volt, Copper, Structure Per Section, Switchboard	4,540.16	1,128.00
26 24 13 00-0234	EA	1,200 Amperes, 480 Volt, Copper, Structure Per Section, Switchboard	5,626.86	1,410.00
26 24 13 00-0235	EA	1,600 Amperes, 480 Volt, Copper, Structure Per Section, Switchboard	6,192.24	1,410.00
26 24 13 00-0236	EA	2,000 Amperes, 480 Volt, Copper, Structure Per Section, Switchboard	7,653.60	1,880.04
26 24 13 00-0237	EA	2,500 Amperes, 480 Volt, Copper, Structure Per Section, Switchboard	8,737.68	1,880.04
26 24 13 00-0238	EA	3,000 Amperes, 480 Volt, Copper, Structure Per Section, Switchboard	10,276.60	2,238.07
26 24 13 00-0239	EA	4,000 Amperes, 480 Volt, Copper, Structure Per Section, Switchboard	12,271.40	2,238.07

26 24 13 00-0240 Main Devices *(26 24 13)*

26 24 13 00-0241 Power Circuit Breakers *(26 24 13 00-0240)*

26 24 13 00-0242 DSL Breaker With Current Limiters And Amptector *(26 24 13 00-0241)*

Note: 11 Static trip not applicable to ground-fault or plug in test feature. Manually operated.

26 24 13 00-0243	EA	50 To 800 Amperes, DSL-206, Main Breaker With Current Limiter, Amptector Static Trip	7,867.20	1,184.41
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*709.14*	
26 24 13 00-0244	EA	50 To 1,600 Amperes, DSL-416, Main Breaker With Current Limiter, Amptector Static Trip	14,344.56	1,974.01
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1,183.22*	
26 24 13 00-0245	EA	1,200 To 3,200 Amperes, DSL-632, Main Breaker With Current Limiter, Amptector Static Trip	32,237.77	3,316.34
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1,972.04*	
26 24 13 00-0246	EA	4,000 Amperes, DSL-840, Main Breaker With Current Limiter, Amptector Static Trip	51,943.64	5,369.30
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3,279.08*	
26 24 13 00-0247	EA	Ground-Fault Trip All Power Breakers - Factory Installed	2,714.71	
26 24 13 00-0248	EA	Key Interlock All Power Breakers - Factory Installed	350.60	
26 24 13 00-0249	EA	Short Time Delay Selective Trip - Factory Installed	459.96	
26 24 13 00-0250	EA	Shunt Trip Manually Open Breakers - Factory Installed	331.30	

26 24 13 00-0251 DSL Breaker Electrical Operated And Amptector *(26 24 13 00-0241)*

Note: 11 Static trip not applicable to ground-fault or plug in test feature. Manually operated.

26 24 13 00-0252	EA	50 To 800 Amperes, DSL-206, Main Breaker, Electrical Operated With Amptector Static Trip	9,209.39	1,240.80
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*748.01*	
26 24 13 00-0253	EA	50 To 1,600 Amperes, DSL-416, Main Breaker, Electrical Operated With Amptector Static Trip	17,093.10	2,086.81
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1,245.96*	
26 24 13 00-0254	EA	1,200 To 3,200 Amperes, DSL-632, Main Breaker, Electrical Operated With Amptector Static Trip	36,202.69	3,440.41
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2,073.54*	
26 24 13 00-0255	EA	4,000 Amperes, DSL-840, Main Breaker, Electrical Operated With Amptector Static Trip	55,938.45	5,640.03
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3,467.23*	

26 24 13 00-0256 DS Breakers With Amptector Static Trip, Manually Operated *(26 24 13 00-0241)*

Note: Includes integral ground fault and plug-in test provision. Excludes system, add price from section drawout mounted manually operated.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 13 00-0257	EA	50 To 800 Amperes, DS-206, Main Breaker With Groundfault, Amptector Static Trip	6,270.25	1,082.89
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*650.77*	
26 24 13 00-0258	EA	50 To 1,600 Amperes, DS-416, Main Breaker With Groundfault, Amptector Static Trip	11,462.01	1,816.09
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1,084.62*	
26 24 13 00-0259	EA	2,000 Amperes, DS-420, Main Breaker With Groundfault, Amptector Static Trip	17,008.35	3,045.61
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1,807.70*	
26 24 13 00-0260	EA	1,200 To 3,200 Amperes, DS-632, Main Breaker With Groundfault, Amptector Static Trip	29,342.56	4,906.82
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3,010.69*	
26 24 13 00-0261	EA	4,000 Amperes, DS-840, Main Breaker With Groundfault, Amptector Static Trip	47,760.90	8,008.84
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5,005.94*	

26 24 13 00-0262 DS Breakers With Amptector Static Trip, Electrically Operated *(26 24 13 00-0241)*

Note: Includes integral ground fault and plug-in test provision. Excludes system, add price from section drawout mounted electrical operated.

26 24 13 00-0263	EA	50 To 800 Amperes, DS-206, Main Breaker, Electrical Operated With Groundfault, Amptector Static Trip	7,382.60	1,037.77
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*620.69*	
26 24 13 00-0264	EA	50 To 1,600 Amperes, DS-416, Main Breaker, Electrical Operated With Groundfault, Amptector Static Trip	13,765.92	1,737.13
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1,034.24*	
26 24 13 00-0265	EA	2,000 Amperes, DS-420, Main Breaker, Electrical Operated With Groundfault, Amptector Static Trip	19,627.82	2,887.69
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1,726.54*	
26 24 13 00-0266	EA	1,200 To 3,200 Amperes, DS-632, Main Breaker, Electrical Operated With Groundfault, Amptector Static Trip	32,396.74	4,703.78
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*2,877.56*	
26 24 13 00-0267	EA	4,000 Amperes, DS-840, Main Breaker, Electrical Operated With Groundfault, Amptector Static Trip	50,691.65	8,065.23
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4,806.84*	

26 24 13 00-0268 Molded Case Circuit Breakers Conventional *(26 24 13 00-0241)*

26 24 13 00-0269	EA	70 To 225 Amperes, 3 Pole, Conventional Molded Case Circuit Breaker	2,689.43	947.52
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*545.81*	
26 24 13 00-0270	EA	125 To 400 Amperes, 3 Pole, Conventional Molded Case Circuit Breaker	3,913.67	947.52
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*593.69*	
26 24 13 00-0271	EA	300 To 600 Amperes, 3 Pole, Conventional Molded Case Circuit Breaker	4,340.37	1,128.00
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*650.77*	
26 24 13 00-0272	EA	400 To 800 Amperes, 3 Pole, Conventional Molded Case Circuit Breaker	5,153.17	1,128.00
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*705.00*	
26 24 13 00-0273	EA	600 To 1,200 Amperes, 3 Pole, Conventional Molded Case Circuit Breaker	7,622.02	1,353.61
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*772.61*	
26 24 13 00-0274	EA	1,000 To 2,000 Amperes, 3 Pole, Conventional Molded Case Circuit Breaker	12,280.83	1,353.61
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*854.55*	
26 24 13 00-0275	EA	Shunt Trip, Factory Installed	347.38	
26 24 13 00-0276	EA	Groundfault Trip Complete Interrupting Circuit, Factory Installed	80.41	

26 24 13 00-0277 Switchboard Branch Breaker 480 Volt *(26 24 13 00-0240)*

26 24 13 00-0278	EA	60 Amperes, 3 Phase, 480 Volt Switchboard Branch Breaker	554.17	81.78
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*49.04*	
26 24 13 00-0279	EA	100 Amperes, 3 Phase, 480 Volt Switchboard Branch Breaker	654.29	108.52
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*65.08*	
26 24 13 00-0280	EA	225 Amperes, 3 Phase, 480 Volt Switchboard Branch Breaker	1,884.21	163.34
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*98.03*	
26 24 13 00-0281	EA	400 Amperes, 3 Phase, 480 Volt Switchboard Branch Breaker	2,490.03	204.96
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*122.97*	
26 24 13 00-0282	EA	600 Amperes, 3 Phase, 480 Volt Switchboard Branch Breaker	3,015.21	274.89
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*164.91*	
26 24 13 00-0283	EA	800 Amperes, 3 Phase, 480 Volt Switchboard Branch Breaker	3,642.54	352.50
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*211.50*	
26 24 13 00-0284	EA	1,000 Amperes, 3 Phase, 480 Volt Switchboard Branch Breaker	5,857.29	537.16
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*322.29*	
26 24 13 00-0285	EA	1,200 Amperes, 3 Phase, 480 Volt Switchboard Branch Breaker	5,857.29	537.16
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*322.29*	
26 24 13 00-0286	EA	1,600 Amperes, 3 Phase, 480 Volt Switchboard Branch Breaker	8,215.13	752.04
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*451.20*	
26 24 13 00-0287	EA	2,000 Amperes, 3 Phase, 480 Volt Switchboard Branch Breaker	10,260.55	1,128.00
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*676.80*	

26 24 13 00-0288 Switchboard 277/480 Volt Main Breaker *(26 24 13 00-0240)*

26 24 13 00-0289	EA	400 Amperes, 277/480 Volt, Main Breaker, Switchboard	6,646.22	489.55
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*293.75*	
26 24 13 00-0290	EA	600 Amperes, 277/480 Volt, Main Breaker, Switchboard	6,739.30	536.15
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*321.68*	
26 24 13 00-0291	EA	800 Amperes, 277/480 Volt, Main Breaker, Switchboard	7,278.48	805.74
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*483.43*	
26 24 13 00-0292	EA	1,200 Amperes, 277/480 Volt, Main Breaker, Switchboard	12,436.69	1,128.00
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*676.80*	
26 24 13 00-0293	EA	1,600 Amperes, 277/480 Volt, Main Breaker, Switchboard	12,676.27	1,247.80
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*748.68*	
26 24 13 00-0294	EA	2,000 Amperes, 277/480 Volt, Main Breaker, Switchboard	16,765.03	2,238.07
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1,342.86*	

26 24 13 00-0295 Branch Or Distribution Devices *(26 24 13)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 13 00-0296		3 Pole, Panel Mounted, Molded Case Circuit Breakers *(26 24 13 00-0295)*		
		Note: Includes certified refurbished circuit breakers.		
26 24 13 00-0297	EA	15 To 60 Amperes, 600 Volt, Type EHB, 3 Pole, Panel Mounted, Molded Case Circuit Breaker	669.69	40.61
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 24 13 00-0298	EA	70 To 100 Amperes, 600 Volt, Type EHB, 3 Pole, Panel Mounted, Molded Case Circuit Breaker	671.97	50.76
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*33.84*	
26 24 13 00-0299	EA	125 To 150 Amperes, 600 Volt, Type FB, 3 Pole, Panel Mounted, Molded Case Circuit Breaker	1,644.36	60.91
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*40.61*	
26 24 13 00-0300	EA	70 To 225 Amperes, 600 Volt, Type JDB, 3 Pole, Panel Mounted, Molded Case Circuit Breaker	2,388.77	78.96
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*52.45*	
26 24 13 00-0301	EA	125 To 400 Amperes, 600 Volt, Type LBB, 3 Pole, Panel Mounted, Molded Case Circuit Breaker	3,373.89	97.46
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*64.97*	
26 24 13 00-0302	EA	300 To 600 Amperes, 600 Volt, Type LC, 3 Pole, Panel Mounted, Molded Case Circuit Breaker	4,424.98	113.93
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*76.14*	
26 24 13 00-0303	EA	900 To 1,000 Amperes, 600 Volt, Type NB, 3 Pole, Panel Mounted, Molded Case Circuit Breaker	6,775.19	128.60
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*85.95*	
26 24 13 00-0304		2 Pole, Panel Mounted, Molded Case Circuit Breakers *(26 24 13 00-0295)*		
		Note: Includes certified refurbished circuit breakers.		
26 24 13 00-0305	EA	15 To 60 Amperes, 600 Volt, Type EHB, 2 Pole, Panel Mounted, Molded Case Circuit Breaker	460.33	30.45
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.30*	
26 24 13 00-0306	EA	70 To 100 Amperes, 600 Volt, Type EHB, 2 Pole, Panel Mounted, Molded Case Circuit Breaker	590.79	40.61
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 24 13 00-0307	EA	125 To 150 Amperes, 600 Volt, Type FB, 2 Pole, Panel Mounted, Molded Case Circuit Breaker	1,642.98	50.76
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*33.84*	
26 24 13 00-0308	EA	70 To 225 Amperes, 600 Volt, Type JDB, 2 Pole, Panel Mounted, Molded Case Circuit Breaker	2,614.13	56.40
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*37.23*	
26 24 13 00-0309	EA	125 To 400 Amperes, 600 Volt, Type LBB, 2 Pole, Panel Mounted, Molded Case Circuit Breaker	2,755.91	73.32
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*49.07*	
26 24 13 00-0310	EA	900 To 1,000 Amperes, 600 Volt, Type NB, 2 Pole, Panel Mounted, Molded Case Circuit Breaker	6,272.84	106.59
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*71.06*	
26 24 13 00-0311		Meter Devices And Instrumentation *(26 24 13)*		
		Note: Factory installed accessories.		
26 24 13 00-0312		Compartments For Instrument Transformers And Metering Devices *(26 24 13 00-0311)*		
26 24 13 00-0313	EA	Compartment For, Up To 800 Amperes, Primary Current Transformer	419.75	
26 24 13 00-0314	EA	Compartment For, 1,000 To 1,500 Amperes, Primary Current Transformer	606.31	
26 24 13 00-0315	EA	Compartment For, 2,000 To 6,000 Amperes, Primary Current Transformer	714.06	
26 24 13 00-0316		Instruments *(26 24 13 00-0311)*		
26 24 13 00-0317	EA	AC Voltmeter	572.53	
26 24 13 00-0318	EA	AC Ammeter	572.53	
26 24 13 00-0319	EA	AC Wattmeter	1,529.44	
26 24 13 00-0320	EA	Variometer	1,727.25	
26 24 13 00-0321	EA	Power Factor Meter	1,379.87	
26 24 13 00-0322	EA	Frequency Meter	1,523.00	
26 24 13 00-0323	EA	200 Volt-Amperes Max Potential Transformer	514.64	
26 24 13 00-0324	EA	AC Watt-hour Meter Indicating 1 Or 2 Element With Test Block And Plug Block	1,937.93	
26 24 13 00-0325	EA	AC Watt-hour Meter Recording 2 Element With Recording KW Demand Type R-2	3,242.21	
26 24 13 00-0326	EA	Weatherproof, Modify Meter	3,127.79	
26 24 13 00-0327	EA	Control Switch Resistor Type 130 V	73.43	
26 24 13 00-0328	EA	Metering Instrument: Voltage, Amperes And Watt Hour	3,910.93	
26 24 16		**Panelboards** *(26 24)*		
26 24 16 00-0001		Branch Circuit Panelboard *(26 24 16)*		
		Note: Includes wiring connections, drilling hole (or removing knock-out on residential units), labeling and testing. All NEMA 3R panelboards include weatherproof hubs. Copper bussing. Panelboards with less than a 30 circuit capacity do not have the door in a door trim front option.		
26 24 16 00-0002		Assembled Lighting And Power Panelboards *(26 24 16 00-0001)*		
		Note: Includes main lugs or breaker (as indicated). 20 Amp, 1 pole branch circuit plug-on breakers (the number of which is indicated). Panelboard box, trim and connection of main service cable from meter.		
26 24 16 00-0003		120/240 Volt, 3 Wire, 1 Phase, Main Lugs Assembled Panelboards *(26 24 16 00-0002)*		
26 24 16 00-0004	EA	100 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, Main Lugs, 12 Circuit Capacity Assembled Panelboard With Eight 20 Ampere Breakers	1,197.11	321.48
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0005	EA	100 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, Main Lugs, 20 Circuit Capacity Assembled Panelboard With Ten 20 Ampere Breakers	1,361.90	321.48
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0006	EA	100 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, Main Lugs, 20 Circuit Capacity Assembled Panelboard With Twelve 20 Ampere Breakers	1,547.48	445.56
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0007	EA	100 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, Main Lugs, 20 Circuit Capacity Assembled Panelboard With Fourteen 20 Ampere Breakers	1,735.22	445.56
		For NEMA 3R Panelboard, Add	*1,620.27*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 16 00-0008	EA	100 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, Main Lugs, 20 Circuit Capacity Assembled Panelboard With Sixteen 20 Ampere Breakers	1,911.96	558.36
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0009	EA	100 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, Main Lugs, 24 Circuit Capacity Assembled Panelboard With Eighteen 20 Ampere Breakers	2,093.31	558.36
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0010	EA	100 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, Main Lugs, 24 Circuit Capacity Assembled Panelboard With Twenty 20 Ampere Breakers	2,268.50	642.96
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0011	EA	225 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, Main Lugs, 30 Circuit Capacity Assembled Panelboard With Twenty-Two 20 Ampere Breakers	2,726.09	823.45
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0012	EA	225 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, Main Lugs, 30 Circuit Capacity Assembled Panelboard With Twenty-Four 20 Ampere Breakers	2,870.27	823.45
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0013	EA	225 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, Main Lugs, 30 Circuit Capacity Assembled Panelboard WithTwenty-Six 20 Ampere Breakers	3,011.72	941.88
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0014	EA	225 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, Main Lugs, 42 Circuit Capacity Assembled Panelboard With Twenty-Eight 20 Ampere Breakers	3,239.69	941.88
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0015	EA	225 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, Main Lugs, 42 Circuit Capacity Assembled Panelboard With Thirty 20 Ampere Breakers	3,380.06	1,060.32
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0016	EA	225 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, Main Lugs, 42 Circuit Capacity Assembled Panelboard With Thirty-Two 20 Ampere Breakers	3,588.92	1,060.32
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0017	EA	225 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, Main Lugs, 42 Circuit Capacity Assembled Panelboard With Thirty-Four 20 Ampere Breakers	3,717.04	1,173.12
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0018	EA	225 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, Main Lugs, 42 Circuit Capacity Assembled Panelboard With Thirty-Six 20 Ampere Breakers	3,926.44	1,173.12
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0019	EA	225 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, Main Lugs, 42 Circuit Capacity Assembled Panelboard With Thirty-Eight 20 Ampere Breakers	4,119.25	1,297.21
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0020	EA	225 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, Main Lugs, 54 Circuit Capacity Assembled Panelboard With Forty 20 Ampere Breakers	4,252.34	1,297.21
		For NEMA 3R Panelboard, Add	*2,190.66*	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0021	EA	225 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, Main Lugs, 54 Circuit Capacity Assembled Panelboard With Forty-Two 20 Ampere Breakers	4,446.97	1,297.21
		For NEMA 3R Panelboard, Add	*2,190.66*	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	

26 24 16 00-0022 120/240 Volt, 3 Wire, 1 Phase, Main Breaker Assembled Panelboards *(26 24 16 00-0002)*

26 24 16 00-0023	EA	50 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, Up To 50 Ampere Main Breaker, 12 Circuit Capacity Assembled Panelboard With Eight 20 Ampere Breakers	1,415.70	310.20
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0024	EA	50 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, Up To 50 Ampere Main Breaker, 12 Circuit Capacity Assembled Panelboard With Ten 20 Ampere Breakers	1,582.94	310.20
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0025	EA	100 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, >50 To 100 Ampere Main Breaker, 20 Circuit Capacity Assembled Panelboard With Twelve 20 Ampere Breakers	1,969.11	530.16
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0026	EA	100 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, >50 To 100 Ampere Main Breaker, 20 Circuit Capacity Assembled Panelboard With Fourteen 20 Ampere Breakers	2,232.74	530.16
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0027	EA	100 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, >50 To 100 Ampere Main Breaker, 20 Circuit Capacity Assembled Panelboard With Sixteen 20 Ampere Breakers	2,413.06	648.60
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0028	EA	100 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, >50 To 100 Ampere Main Breaker, 24 Circuit Cpacity Assembled Panelboard With Eighteen 20 Ampere Breakers	2,601.05	648.60
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0029	EA	100 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, >50 To 100 Ampere Main Breaker, 24 Circuit Capacity Assembled Panelboard With Twenty 20 Ampere Breakers	2,768.05	778.32
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0030	EA	225 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, >100 To 225 Ampere Main Breaker, 30 Circuit Capacity Assembled Panelboard With Twenty-Two 20 Ampere Breakers	3,348.20	778.32
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0031	EA	225 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, >100 To 225 Ampere Main Breaker, 30 Circuit Capacity Assembled Panelboard With Twenty-Four 20 Ampere Breakers	3,497.12	953.17
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 16 00-0032	EA	225 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, >100 To 225 Ampere Main Breaker, 30 Circuit Capacity Assembled Panelboard With Twenty-Six 20 Ampere Breakers	3,658.85	953.17
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0033	EA	225 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, >100 To 225 Ampere Main Breaker, 42 Circuit Capacity Assembled Panelboard With Twenty-Eight 20 Ampere Breakers	3,835.94	1,071.61
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0034	EA	225 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, >100 To 225 Ampere Main Breaker, 42 Circuit Capacity Assembled Panelboard With Thirty 20 Ampere Breakers	3,979.63	1,071.61
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0035	EA	225 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, >100 To 225 Ampere Main Breaker, 42 Circuit Capacity Assembled Panelboard With Thirty-Two 20 Ampere Breakers	4,132.79	1,173.12
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0036	EA	225 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, >100 To 225 Ampere Main Breaker, 42 Circuit Capacity Assembled Panelboard With Thirty-Four 20 Ampere Breakers	4,296.88	1,173.12
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0037	EA	225 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, >100 To 225 Ampere Main Breaker, 42 Circuit Capacity Assembled Panelboard With Thirty-Six 20 Ampere Breakers	4,473.70	1,387.45
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0038	EA	225 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, >100 To 225 Ampere Main Breaker, 42 Circuit Capacity Assembled Panelboard With Thirty-Eight 20 Ampere Breakers	4,665.41	1,387.45
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0039	EA	225 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, >100 To 225 Ampere Main Breaker, 54 Circuit Capacity Assembled Panelboard With Forty 20 Ampere Breakers	4,874.71	1,387.45
		For NEMA 3R Panelboard, Add	*2,190.66*	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0040	EA	225 Ampere Rating, 120/240 Volt, 3 Wire, 1 Phase, >100 To 225 Ampere Main Breaker, 54 Circuit Capacity Assembled Panelboard With Forty-Two 20 Ampere Breakers	5,004.35	1,466.41
		For NEMA 3R Panelboard, Add	*2,190.66*	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0041		**120/208 Volt, 4 Wire, 3 Phase, Main Lugs Assembled Panelboards** *(26 24 16 00-0002)*		
26 24 16 00-0042	EA	100 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, Main Lugs, 12 Circuit Capacity Assembled Panelboard With Eight 20 Ampere Breakers	1,444.35	366.60
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0043	EA	100 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, Main Lugs, 20 Circuit Capacity Assembled Panelboard With Ten 20 Ampere Breakers	1,622.02	366.60
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0044	EA	100 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, Main Lugs, 20 Circuit Capacity Assembled Panelboard With Twelve 20 Ampere Breakers	1,823.50	490.69
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0045	EA	100 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, Main Lugs, 20 Circuit Capacity Assembled Panelboard With Fourteen 20 Ampere Breakers	2,034.94	490.69
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0046	EA	100 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, Main Lugs, 20 Circuit Capacity Assembled Panelboard With Sixteen 20 Ampere Breakers	2,224.63	603.49
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0047	EA	100 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, Main Lugs, 24 Circuit Capacity Assembled Panelboard With Eighteen 20 Ampere Breakers	2,427.33	603.49
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0048	EA	100 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, Main Lugs, 24 Circuit Capacity Assembled Panelboard With Twenty 20 Ampere Breakers	2,618.20	716.28
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0049	EA	100 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, Main Lugs, 30 Circuit Capacity Assembled Panelboard With Twenty-Two 20 Ampere Breakers	2,815.99	716.28
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0050	EA	100 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, Main Lugs, 30 Circuit Capacity Assembled Panelboard With Twenty-Four 20 Ampere Breakers	2,999.33	840.36
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0051	EA	100 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, Main Lugs, 30 Circuit Capacity Assembled Panelboard With Twenty-Six 20 Ampere Breakers	3,210.46	840.36
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0052	EA	100 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, Main Lugs, 30 Circuit Capacity Assembled Panelboard With Twenty-Eight 20 Ampere Breakers	3,426.04	970.09
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0053	EA	100 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, Main Lugs, 30 Circuit Capacity Assembled Panelboard With Thirty 20 Ampere Breakers	3,637.13	970.09
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0054	EA	225 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, Main Lugs, 42 Circuit Capacity Assembled Panelboard With Thirty-Two 20 Ampere Breakers	4,060.29	1,173.12
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 16 00-0055	EA	225 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, Main Lugs, 42 Circuit Capacity Assembled Panelboard With Thirty-Four 20 Ampere Breakers	4,204.94	1,173.12
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0056	EA	225 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, Main Lugs, 42 Circuit Capacity Assembled Panelboard With Thirty-Six 20 Ampere Breakers	4,450.93	1,302.85
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0057	EA	225 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, Main Lugs, 42 Circuit Capacity Assembled Panelboard With Thirty-Eight 20 Ampere Breakers	4,674.89	1,302.85
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0058	EA	225 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, Main Lugs, 54 Circuit Capacity Assembled Panelboard With Forty 20 Ampere Breakers	4,832.66	1,421.29
		For NEMA 3R Panelboard, Add	*2,190.66*	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0059	EA	225 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, Main Lugs, 54 Circuit Capacity Assembled Panelboard With Forty-Two 20 Ampere Breakers	5,057.16	1,421.29
		For NEMA 3R Panelboard, Add	*2,190.66*	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0060	EA	400 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, Main Lugs, 42 Circuit Capacity Assembled Panelboard With Thirty-Two 20 Ampere Breakers	4,908.30	1,261.11
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0061	EA	400 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, Main Lugs, 42 Circuit Capacity Assembled Panelboard With Thirty-Four 20 Ampere Breakers	5,067.88	1,325.40
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0062	EA	400 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, Main Lugs, 42 Circuit Capacity Assembled Panelboard With Thirty-Six 20 Ampere Breakers	5,325.08	1,395.91
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0063	EA	400 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, Main Lugs, 42 Circuit Capacity Assembled Panelboard With Thirty-Eight 20 Ampere Breakers	5,566.11	1,477.69
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0064	EA	400 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, Main Lugs, 54 Circuit Capacity Assembled Panelboard With Forty 20 Ampere Breakers	5,733.82	1,522.80
		For NEMA 3R Panelboard, Add	*2,190.66*	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0065	EA	400 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, Main Lugs, 54 Circuit Capacity Assembled Panelboard With Forty-Two 20 Ampere Breakers	6,005.17	1,615.86
		For NEMA 3R Panelboard, Add	*2,190.66*	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0066		120/208 Volt, 4 Wire, 3 Phase, Main Breaker Assembled Panelboards *(26 24 16 00-0002)*		
26 24 16 00-0067	EA	50 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, Up To 50 Ampere Main Breaker, 12 Circuit Capacity Assembled Panelboard With Eight 20 Ampere Breakers	1,714.25	355.33
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0068	EA	50 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, Up To 50 Ampere Main Breaker, 20 Circuit Capacity Assembled Panelboard With Ten 20 Ampere Breakers	1,894.21	355.33
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0069	EA	50 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, Up To 50 Ampere Main Breaker, 20 Circuit Capacity Assembled Panelboard With Twelve 20 Ampere Breakers	2,107.87	468.12
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0070	EA	50 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, Up To 50 Ampere Main Breaker, 20 Circuit Capacity Assembled Panelboard With Fourteen 20 Ampere Breakers	2,403.25	468.12
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0071	EA	100 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, >50 To 100 Ampere Main Breaker, 20 Circuit Capacity Assembled Panelboard With Sixteen 20 Ampere Breakers	2,844.34	705.01
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0072	EA	100 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, >50 To 100 Ampere Main Breaker, 24 Circuit Capacity Assembled Panelboard With Eighteen 20 Ampere Breakers	3,029.55	705.01
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0073	EA	100 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, >50 To 100 Ampere Main Breaker, 24 Circuit Capacity Assembled Panelboard With Twenty 20 Ampere Breakers	3,230.35	823.45
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0074	EA	100 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, >50 To 100 Ampere Main Breaker, 30 Circuit Capacity Assembled Panelboard With Twenty-Two 20 Ampere Breakers	3,397.92	823.45
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0075	EA	100 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, >50 To 100 Ampere Main Breaker, 30 Circuit Capacity Assembled Panelboard With Twenty-Four 20 Ampere Breakers	3,623.04	953.17
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0076	EA	100 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, >50 To 100 Ampere Main Breaker, 30 Circuit Capacity Assembled Panelboard With Twenty-Six 20 Ampere Breakers	3,777.63	953.17
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0077	EA	100 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, >50 To 100 Ampere Main Breaker, 30 Circuit Capacity Assembled Panelboard With Twenty-Eight 20 Ampere Breakers	4,026.36	1,071.61
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 16 00-0078	EA	100 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, >50 To 100 Ampere Main Breaker, 30 Circuit Capacity Assembled Panelboard With Thirty 20 Ampere Breakers	4,239.23	1,071.61
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0079	EA	225 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, >100 To 225 Ampere Main Breaker, 42 Circuit Capacity Assembled Panelboard With Thirty-Two 20 Ampere Breakers	4,980.25	1,240.80
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0080	EA	225 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, >100 To 225 Ampere Main Breaker, 42 Circuit Capacity Assembled Panelboard With Thirty-Four 20 Ampere Breakers	5,201.44	1,308.48
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0081	EA	225 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, >100 To 225 Ampere Main Breaker, 42 Circuit Capacity Assembled Panelboard With Thirty-Six 20 Ampere Breakers	5,295.99	1,308.48
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0082	EA	225 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, >100 To 225 Ampere Main Breaker, 42 Circuit Capacity Assembled Panelboard With Thirty-Eight 20 Ampere Breakers	5,544.50	1,477.69
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0083	EA	225 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, >100 To 225 Ampere Main Breaker, 54 Circuit Capacity Assembled Panelboard With Forty 20 Ampere Breakers	5,717.27	1,477.69
		For NEMA 3R Panelboard, Add	*2,190.66*	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0084	EA	225 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, >100 To 225 Ampere Main Breaker, 54 Circuit Capacity Assembled Panelboard With Forty-Two- 20 Ampere Breakers	5,831.97	1,477.69
		For NEMA 3R Panelboard, Add	*2,190.66*	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0085	EA	400 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, >225 To 400 Ampere Main Breaker, 42 Circuit Capacity Assembled Panelboard With Thirty-Two 20 Ampere Breakers	5,853.52	1,359.24
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0086	EA	400 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, >225 To 400 Ampere Main Breaker, 42 Circuit Capacity Assembled Panelboard With Thirty-Four 20 Ampere Breakers	6,095.52	1,438.21
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0087	EA	400 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, >225 To 400 Ampere Main Breaker, 42 Circuit Capacity Assembled Panelboard With Thirty-Six 20 Ampere Breakers	6,193.31	1,477.69
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0088	EA	400 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, >225 To 400 Ampere Main Breaker, 42 Circuit Capacity Assembled Panelboard With Thirty-Eight 20 Ampere Breakers	6,461.65	1,567.93
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0089	EA	400 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, >225 To 400 Ampere Main Breaker, 54 Circuit Capacity Assembled Panelboard With Forty 20 Ampere Breakers	6,633.45	1,613.05
		For NEMA 3R Panelboard, Add	*2,190.66*	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0090	EA	400 Ampere Rating, 120/208 Volt, 4 Wire, 3 Phase, >225 To 400 Ampere Main Breaker, 54 Circuit Capacity Assembled Panelboard With Forty-Two 20 Ampere Breakers	6,796.45	1,669.45
		For NEMA 3R Panelboard, Add	*2,190.66*	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	

26 24 16 00-0091 480 Volt, 3 Wire, 3 Phase, Main Lugs Assembled Panelboards *(26 24 16 00-0002)*

26 24 16 00-0092	EA	100 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, Main Lugs, 12 Circuit Capacity Assembled Panelboard With Eight 20 Ampere Breakers	1,627.01	360.96
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0093	EA	100 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, Main Lugs, 20 Circuit Capacity Assembled Panelboard With Ten 20 Ampere Breakers	1,861.35	360.96
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0094	EA	100 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, Main Lugs, 20 Circuit Capacity Assembled Panelboard With Twelve 20 Ampere Breakers	2,086.02	496.32
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0095	EA	100 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, Main Lugs, 20 Circuit Capacity Assembled Panelboard With Fourteen 20 Ampere Breakers	2,320.33	496.32
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0096	EA	100 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, Main Lugs, 20 Circuit Capacity Assembled Panelboard With Sixteen 20 Ampere Breakers	2,538.86	620.41
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0097	EA	100 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, Main Lugs, 24 Circuit Capacity Assembled Panelboard With Eighteen 20 Ampere Breakers	2,769.13	620.41
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0098	EA	100 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, Main Lugs, 24 Circuit Capacity Assembled Panelboard WithTwenty 20 Ampere Breakers	3,009.42	750.12
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0099	EA	100 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, Main Lugs, 30 Circuit Capacity Assembled Panelboard With Twenty-Two 20 Ampere Breakers	3,229.65	750.12
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0100	EA	100 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, Main Lugs, 30 Circuit Capacity Assembled Panelboard WithTwenty-Four 20 Ampere Breakers	3,471.77	891.12
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 16 00-0101	EA	100 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, Main Lugs, 30 Circuit Capacity Assembled Panelboard With Twenty-Six 20 Ampere Breakers	3,705.52	891.12
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0102	EA	100 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, Main Lugs, 30 Circuit Capacity Assembled Panelboard With Twenty-Eight 20 Ampere Breakers	3,920.42	1,015.20
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0103	EA	100 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, Main Lugs, 30 Circuit Capacity Assembled Panelboard With Thirty 20 Ampere Breakers	4,150.68	1,015.20
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0104	EA	225 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, Main Lugs, 42 Circuit Capacity Assembled Panelboard With Thirty-Two 20 Ampere Breakers	4,643.14	1,235.17
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0105	EA	225 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, Main Lugs, 42 Circuit Capacity Assembled Panelboard With Thirty-Four 20 Ampere Breakers	4,873.14	1,235.17
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0106	EA	225 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, Main Lugs, 42 Circuit Capacity Assembled Panelboard With Thirty-Six 20 Ampere Breakers	5,118.02	1,353.61
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0107	EA	225 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, Main Lugs, 42 Circuit Capacity Assembled Panelboard With Thirty- Eight 20 Ampere Breakers	5,296.71	1,353.61
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0108	EA	225 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, Main Lugs, 54 Circuit Capacity Assembled Panelboard With Forty 20 Ampere Breakers	5,569.22	1,494.61
		For NEMA 3R Panelboard, Add	*2,190.66*	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0109	EA	225 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, Main Lugs, 54 Circuit Capacity Assembled Panelboard With Forty-Two 20 Ampere Breakers	5,763.67	1,494.61
		For NEMA 3R Panelboard, Add	*2,190.66*	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	

26 24 16 00-0110 480 Volt, 3 Wire, 3 Phase, Main Breaker Assembled Panelboards *(26 24 16 00-0002)*

26 24 16 00-0111	EA	50 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, Up To 50 Amp Main Breaker, 12 Circuit Capacity Assembled Panelboard With Eight 20 Ampere Breakers	2,068.41	383.52
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0112	EA	50 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, Up To 50 Amp Main Breaker, 20 Circuit Capacity Assembled Panelboard With Ten 20 Ampere Breakers	2,297.40	417.36
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0113	EA	50 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, Up To 50 Amp Main Breaker, 20 Circuit Capacity Assembled Panelboard With Twelve 20 Ampere Breakers	2,528.92	518.88
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0114	EA	100 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, >50 To 100 Amp Main Breaker, 20 Circuit Capacity Assembled Panelboard With Fourteen 20 Ampere Breakers,	3,040.18	631.68
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0115	EA	100 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, >50 To 100 Amp Main Breaker, 20 Circuit Capacity Assembled Panelboard With Sixteen 20 Ampere Breakers	3,261.51	699.36
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0116	EA	100 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, >50 To 100 Amp Main Breaker, 24 Circuit Capacity Assembled Panelboard With Eighteen 20 Ampere Breakers	3,463.02	755.77
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0117	EA	100 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, >50 To 100 Ampere Main Breaker, 24 Circuit Capacity Assembled Panelboard With Twenty 20 Ampere Breakers	3,685.35	823.45
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0118	EA	100 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, >50 To 100 Ampere Main Breaker, 30 Circuit Capacity Assembled Panelboard With Twenty-Two 20 Ampere Breakers	3,899.20	891.12
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0119	EA	100 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, >50 To 100 Ampere Main Breaker, 30 Circuit Capacity Assembled Panelboard With Twenty-Four 20 Ampere Breakers	4,094.63	947.52
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0120	EA	100 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, >50 To 100 Ampere Main Breaker, 30 Circuit Capacity Assembled Panelboard With Twenty-Six 20 Ampere Breakers	4,304.50	1,003.93
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0121	EA	100 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, >50 To 100 Ampere Main Breaker, 30 Circuit Capacity Assembled Panelboard With Twenty-Eight 20 Ampere Breakers	4,531.82	1,071.61
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0122	EA	100 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, >50 To 100 Ampere Main Breaker, 30 Circuit Capacity Assembled Panelboard With Thirty 20 Ampere Breakers	4,780.51	1,156.21
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0123	EA	225 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, >100 To 225 Ampere Main Breaker, 42 Circuit Capacity Assembled Panelboard With Thirty-Two 20 Ampere Breakers	6,005.25	1,285.93
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 16 00-0124	EA	225 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, >100 To 225 Ampere Main Breaker, 42 Circuit Capacity Assembled Panelboard With Thirty-Four 20 Ampere Breakers	6,243.60	1,364.89
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0125	EA	225 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, >100 To 225 Ampere Main Breaker, 42 Circuit Capacity Assembled Panelboard With Thirty-Six 20 Ampere Breakers	6,412.31	1,398.73
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0126	EA	225 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, >100 To 225 Ampere Main Breaker, 42 Circuit Capacity Assembled Panelboard With Thirty-Eight 20 Ampere Breakers	6,680.64	1,488.96
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0127	EA	225 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, >100 To 225 Ampere Main Breaker, 54 Circuit Cpacity Assembled Panelboard With Forty 20 Ampere Breakers	6,866.46	1,545.37
		For NEMA 3R Panelboard, Add	*2,190.66*	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0128	EA	225 Ampere Rating, 480 Volt, 3 Wire, 3 Phase, >100 To 225 Ampere Main Breaker, 54 Circuit Capacity Assembled Panelboard With Forty-Two 20 Ampere Breakers	7,059.27	1,593.87
		For NEMA 3R Panelboard, Add	*2,190.66*	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	

26 24 16 00-0129 277/480 Volt, 4 Wire, 3 Phase, Main Lugs Assembled Panelboards *(26 24 16 00-0002)*

26 24 16 00-0130	EA	100 Ampere Rating , 277/480 Volt, 4 Wire, 3 Phase, Main Lugs, 12 Circuit Capacity Assembled Panelboard With Eight 20 Ampere Breakers	1,977.63	394.80
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0131	EA	100 Ampere Rating , 277/480 Volt, 4 Wire, 3 Phase, Main Lugs, 20 Circuit Capacity Assembled Panelboard With Ten 20 Ampere Breakers	2,238.72	394.80
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0132	EA	100 Ampere Rating , 277/480 Volt, 4 Wire, 3 Phase, Main Lugs, 20 Circuit Capacity Assembled Panelboard With Twelve 20 Ampere Breakers	2,492.95	524.52
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0133	EA	100 Ampere Rating , 277/480 Volt, 4 Wire, 3 Phase, Main Lugs, 20 Circuit Capacity Assembled Panelboard With Fourteen 20 Ampere Breakers	2,749.29	524.52
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0134	EA	100 Ampere Rating , 277/480 Volt, 4 Wire, 3 Phase, Main Lugs, 20 Circuit Capacity Assembled Panelboard With Sixteen 20 Ampere Breakers	3,009.86	648.60
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0135	EA	100 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, Main Lugs, 24 Circuit Capacity Assembled Panelboard With Eighteen 20 Ampere Breakers	3,264.95	648.60
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0136	EA	100 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, Main Lugs, 24 Circuit Capacity Assembled Panelboard With Twenty 20 Ampere Breakers	3,524.31	778.32
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0137	EA	100 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, Main Lugs, 30 Circuit Capacity Assembled Panelboard With Twenty-Two 20 Ampere Breakers	3,782.56	778.32
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0138	EA	100 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, Main Lugs, 30 Circuit Capacity Assembled Panelboard With Twenty-Four 20 Ampere Breakers	4,065.06	913.68
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0139	EA	100 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, Main Lugs, 30 Circuit Capacity Assembled Panelboard With Twenty-Six 20 Ampere Breakers	4,301.10	913.68
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0140	EA	100 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, Main Lugs, 30 Circuit Capacity Assembled Panelboard With Twenty-Eight 20 Ampere Breakers	4,550.71	919.33
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0141	EA	100 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, Main Lugs, 32 Circuit Capacity Assembled Panelboard With Thirty 20 Ampere Breakers	4,816.69	919.33
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0142	EA	225 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, Main Lugs, 42 Circuit Capacity Assembled Panelboard With Thirty-Two 20 Ampere Breakers	5,488.08	1,274.64
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0143	EA	225 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, Main Lugs, 42 Circuit Capacity Assembled Panelboard With Thirty-Four 20 Ampere Breakers	5,760.11	1,274.64
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0144	EA	225 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, Main Lugs, 42 Circuit Capacity Assembled Panelboard With Thirty-Six 20 Ampere Breakers	5,969.33	1,342.32
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0145	EA	225 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, Main Lugs, 42 Circuit Capacity Assembled Panelboard With Thirty-Eight 20 Ampere Breakers	6,266.69	1,432.57
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0146	EA	225 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, Main Lugs, 54 Circuit Capacity Assembled Panelboard With Forty 20 Ampere Breakers	6,490.31	1,432.57
		For NEMA 3R Panelboard, Add	*2,190.66*	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 16 00-0147	EA	225 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, Main Lugs, 54 Circuit Capacity Assembled Panelboard With Forty-Two 20 Ampere Breakers	6,820.73	1,567.93
		For NEMA 3R Panelboard, Add	*2,190.66*	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0148		277/480 Volt, 4 Wire, 3 Phase, Main Breaker Assembled Panelboards *(26 24 16 00-0002)*		
26 24 16 00-0149	EA	50 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, 50 Ampere Main Breaker, 20 Circuit Capacity Assembled Panelboard With Eight 20 Ampere Breakers	2,565.83	485.04
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0150	EA	50 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, 50 Ampere Main Breaker, 20 Circuit Capacity Assembled Panelboard With Ten 20 Ampere Breakers	2,833.19	485.04
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0151	EA	50 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, 50 Ampere Main Breaker, 20 Circuit Capacity Assembled Panelboard With Twelve 20 Ampere Breakers	3,090.32	642.96
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0152	EA	100 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, >50 To 100 Ampere Main Breaker, 20 Circuit Capacity Assembled Panelboard With Fourteen 20 Ampere Breakers	3,681.26	642.96
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0153	EA	100 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, >50 To 100 Ampere Main Breaker, 20 Circuit Capacity Assembled Panelboard With Sixteen 20 Ampere Breakers	3,929.45	812.16
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0154	EA	100 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, >50 To 100 Ampere Main Breaker, 24 Circuit Capacity Assembled Panelboard With Eighteen 20 Ampere Breakers	4,177.20	812.16
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0155	EA	100 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, >50 To 100 Ampere Main Breaker, 24 Circuit Capacity Assembled Panelboard With Twenty 20 Ampere Breakers	4,416.49	930.60
		For NEMA 3R Panelboard, Add	*1,620.27*	
26 24 16 00-0156	EA	100 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, >50 To 100 Ampere Main Breaker, 30 Circuit Capacity Assembled Panelboard With Twenty-Two 20 Ampere Breakers	4,637.33	930.60
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0157	EA	100 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, >50 To 100 Ampere Main Breaker, 30 Circuit Capacity Assembled Panelboard With Twenty-Four 20 Ampere Breakers	4,872.63	1,060.32
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0158	EA	100 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, >50 To 100 Ampere Main Breaker, 30 Circuit Capacity Assembled Panelboard With Twenty-Six 20 Ampere Breakers	5,125.36	1,060.32
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0159	EA	100 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, >50 To 100 Ampere Main Breaker, 30 Circuit Capacity Assembled Panelboard With Twenty-Eight 20 Ampere Breakers	5,342.17	1,173.12
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0160	EA	100 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, >50 To 100 Ampere Main Breaker, 30 Circuit Capacity Assembled Panelboard With Thirty 20 Ampere Breakers	5,569.92	1,173.12
		For NEMA 3R Panelboard, Add	*1,781.85*	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0161	EA	225 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, >100 To 225 Ampere Main Breaker, 42 Circuit Capacity Assembled Panelboard With Thirty-Two 20 Ampere Breakers	7,267.80	1,387.45
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0162	EA	225 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, >100 To 225 Ampere Main Breaker, 42 Circuit Capacity Assembled Panelboard With Thirty-Four 20 Ampere Breakers	7,544.98	1,387.45
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0163	EA	225 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, >100 To 225 Ampere Main Breaker, 42 Circuit Capacity Assembled Panelboard With Thirty-Six 20 Ampere Breakers	7,748.41	1,517.17
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0164	EA	225 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, >100 To 225 Ampere Main Breaker, 42 Circuit Capacity Assembled Panelboard With Thirty-Eight 20 Ampere Breakers	8,058.65	1,517.17
		For NEMA 3R Panelboard, Add	*2,104.80*	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0165	EA	225 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, >100 To 225 Ampere Main Breaker, 54 Circuit Capacity Assembled Panelboard With Forty 20 Ampere Breakers	8,281.11	1,658.16
		For NEMA 3R Panelboard, Add	*2,190.66*	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0166	EA	225 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, >100 To 225 Ampere Main Breaker, 54 Circuit Capacity Assembled Panelboard With Forty-Two 20 Ampere Breakers	8,511.29	1,658.16
		For NEMA 3R Panelboard, Add	*2,190.66*	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0167	EA	400 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, >225 To 400 Ampere Main Breaker, 54 Circuit Capacity Assembled Panelboard With Forty-Two 20 Ampere Breakers	10,093.65	1,846.54
		For NEMA 3R Panelboard, Add	*2,190.66*	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0168	EA	600 Ampere Rating, 277/480 Volt, 4 Wire, 3 Phase, >400 To 600 Ampere Main Breaker, 54 Circuit Capacity Assembled Panelboard With Forty-Two 20 Ampere Breakers	12,285.05	2,216.53
		For NEMA 3R Panelboard, Add	*2,190.66*	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 16 00-0169		**Unassembled Lighting And Power Panelboards** *(26 24 16 00-0001)* Note: Includes the main device (lugs or breaker), connection of main service cable from meter and that portion of the panel box, trim and interior occupied by that device. Spaces include that portion of the panel box, trim and interior reserved by that space. The maximum single pole capacity of the panelboard main device (lugs, breakers) is indicated. Excludes branch breakers. A complete panelboard will be the sum of main device and the branch circuit breakers and spaces (within the capacity of the main device). See CSI section 26 28 16 13-0001 for circuit breakers.		
26 24 16 00-0170		**240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase Unassembled Panelboards** *(26 24 16 00-0169)* Note: As manufactured by Square D or equal. Accepts plug-on and bolt-on breakers.		
26 24 16 00-0171		**Main Lugs, NEMA 1, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase Unassembled Panelboards** *(26 24 16 00-0170)*		
26 24 16 00-0172	EA	100 Ampere Rating, 12 Circuit Capacity, Main Lugs, NEMA 1, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	628.99	
26 24 16 00-0173	EA	100 Ampere Rating, 20 Circuit Capacity, Main Lugs, NEMA 1, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	723.88	
26 24 16 00-0174	EA	225 Ampere Rating, 30 Circuit Capacity, Main Lugs, NEMA 1, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	986.49	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0175	EA	225 Ampere Rating, 42 Circuit Capacity, Main Lugs, NEMA 1, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	1,138.78	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0176	EA	225 Ampere Rating, 54 Circuit Capacity, Main Lugs, NEMA 1, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	1,288.81	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0177	EA	400 Ampere Rating, 30 Circuit Capacity, Main Lugs, NEMA 1, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	1,441.71	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0178	EA	400 Ampere Rating, 42 Circuit Capacity, Main Lugs, NEMA 1, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	1,565.38	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0179	EA	400 Ampere Rating, 54 Circuit Capacity, Main Lugs, NEMA 1, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	1,714.37	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0180	EA	600 Ampere Rating, 30 Circuit Capacity, Main Lugs, NEMA 1, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	1,867.45	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0181	EA	600 Ampere Rating, 42 Circuit Capacity, Main Lugs, NEMA 1, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	1,990.75	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0182	EA	600 Ampere Rating, 54 Circuit Capacity, Main Lugs, NEMA 1, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	2,174.79	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0183		**Main Breaker, NEMA 1, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase Unassembled Panelboards** *(26 24 16 00-0170)*		
26 24 16 00-0184	EA	100 Ampere Rating, 12 Circuit Capacity, Main Breaker, NEMA 1, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	935.91	
26 24 16 00-0185	EA	100 Ampere Rating, 20 Circuit Capacity, Main Breaker, NEMA 1, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	1,060.72	
26 24 16 00-0186	EA	225 Ampere Rating, 30 Circuit Capacity, Main Breaker, NEMA 1, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	1,700.13	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0187	EA	225 Ampere Rating, 42 Circuit Capacity, Main Breaker, NEMA 1, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	1,888.08	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0188	EA	225 Ampere Rating, 54 Circuit Capacity, Main Breaker, NEMA 1, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	2,064.87	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0189	EA	400 Ampere Rating, 30 Circuit Capacity, Main Breaker, NEMA 1, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	3,579.34	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0190	EA	400 Ampere Rating, 42 Circuit Capacity, Main Breaker, NEMA 1, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	3,791.09	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0191	EA	400 Ampere Rating, 54 Circuit Capacity, Main Breaker, NEMA 1, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	3,982.17	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0192		**Main Lugs, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase Unassembled Panelboards** *(26 24 16 00-0170)*		
26 24 16 00-0193	EA	100 Ampere Rating, 12 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	1,270.27	
26 24 16 00-0194	EA	100 Ampere Rating, 20 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	1,357.83	
26 24 16 00-0195	EA	225 Ampere Rating, 30 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	1,605.17	
26 24 16 00-0196	EA	225 Ampere Rating, 42 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	1,754.40	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 16 00-0197	EA	225 Ampere Rating, 54 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	1,892.83	
26 24 16 00-0198	EA	400 Ampere Rating, 30 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	2,164.22	
26 24 16 00-0199	EA	400 Ampere Rating, 42 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	2,279.95	
26 24 16 00-0200	EA	400 Ampere Rating, 54 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	2,421.60	
26 24 16 00-0201	EA	600 Ampere Rating, 30 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	2,630.87	
26 24 16 00-0202	EA	600 Ampere Rating, 42 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	2,749.67	
26 24 16 00-0203	EA	600 Ampere Rating, 54 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	2,922.34	

26 24 16 00-0204 Main Breaker, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase Unassembled Panelboards *(26 24 16 00-0170)*

26 24 16 00-0205	EA	100 Ampere Rating, 12 Circuit Capacity, Main Breaker, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	1,569.86	
26 24 16 00-0206	EA	100 Ampere Rating, 20 Circuit Capacity, Main Breaker, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	1,686.73	
26 24 16 00-0207	EA	225 Ampere Rating, 30 Circuit Capacity, Main Breaker, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	2,437.29	
26 24 16 00-0208	EA	225 Ampere Rating, 42 Circuit Capacity, Main Breaker, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	2,610.59	
26 24 16 00-0209	EA	225 Ampere Rating, 54 Circuit Capacity, Main Breaker, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	2,776.39	
26 24 16 00-0210	EA	400 Ampere Rating, 30 Circuit Capacity, Main Breaker, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	4,275.58	
26 24 16 00-0211	EA	400 Ampere Rating, 42 Circuit Capacity, Main Breaker, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	4,480.01	
26 24 16 00-0212	EA	400 Ampere Rating, 54 Circuit Capacity, Main Breaker, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 3 Wire, 1 Phase, Unassembled Panelboard	4,669.25	

26 24 16 00-0213 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase Unassembled Panelboards *(26 24 16 00-0169)*

Note: As manufactured by Square D or equal. Accepts plug-on and bolt-on breakers

26 24 16 00-0214 Main Lugs, NEMA 1, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase Unassembled Panelboards *(26 24 16 00-0213)*

26 24 16 00-0215	EA	100 Ampere Rating, 12 Circuit Capacity, Main Lugs, NEMA 1, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	709.05	
26 24 16 00-0216	EA	100 Ampere Rating, 24 Circuit Capacity, Main Lugs, NEMA 1, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	834.03	
26 24 16 00-0217	EA	100 Ampere Rating, 30 Circuit Capacity, Main Lugs, NEMA 1, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	939.07	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0218	EA	225 Ampere Rating, 30 Circuit Capacity, Main Lugs, NEMA 1, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	1,063.70	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0219	EA	225 Ampere Rating, 42 Circuit Capacity, Main Lugs, NEMA 1, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	1,224.45	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0220	EA	225 Ampere Rating, 54 Circuit Capacity, Main Lugs, NEMA 1, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	1,356.12	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0221	EA	400 Ampere Rating, 30 Circuit Capacity, Main Lugs, NEMA 1, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	1,563.78	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0222	EA	400 Ampere Rating, 42 Circuit Capacity, Main Lugs, NEMA 1, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	1,685.23	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0223	EA	400 Ampere Rating, 54 Circuit Capacity, Main Lugs, NEMA 1, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	1,819.42	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0224	EA	600 Ampere Rating, 30 Circuit Capacity, Main Lugs, NEMA 1, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	2,002.94	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0225	EA	600 Ampere Rating, 42 Circuit Capacity, Main Lugs, NEMA 1, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	2,210.35	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0226	EA	600 Ampere Rating, 54 Circuit Capacity, Main Lugs, NEMA 1, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	2,614.04	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	

26 24 16 00-0227 Main Breaker, NEMA 1, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase Unassembled Panelboards *(26 24 16 00-0213)*

26 24 16 00-0228	EA	100 Ampere Rating, 12 Circuit Capacity, Main Breaker, NEMA 1, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	1,097.25	
26 24 16 00-0229	EA	100 Ampere Rating, 24 Circuit Capacity, Main Breaker, NEMA 1, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	1,237.65	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 16 00-0230	EA	100 Ampere Rating, 30 Circuit Capacity, Main Breaker, NEMA 1, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	1,420.74	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0231	EA	225 Ampere Rating, 30 Circuit Capacity, Main Breaker, NEMA 1, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	2,104.19	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0232	EA	225 Ampere Rating, 42 Circuit Capacity, Main Breaker, NEMA 1, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	2,278.69	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0233	EA	225 Ampere Rating, 54 Circuit Capacity, Main Breaker, NEMA 1, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	2,441.91	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0234	EA	400 Ampere Rating, 30 Circuit Capacity, Main Breaker, NEMA 1, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	3,378.12	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0235	EA	400 Ampere Rating, 42 Circuit Capacity, Main Breaker, NEMA 1, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	3,575.11	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0236	EA	400 Ampere Rating, 54 Circuit Capacity, Main Breaker, NEMA 1, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	3,738.49	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	

26 24 16 00-0237 Main Lugs, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase Unassembled Panelboards *(26 24 16 00-0213)*

26 24 16 00-0238	EA	100 Ampere Rating, 12 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	1,350.33	
26 24 16 00-0239	EA	100 Ampere Rating, 24 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	1,467.97	
26 24 16 00-0240	EA	100 Ampere Rating, 30 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	1,565.08	
26 24 16 00-0241	EA	225 Ampere Rating, 30 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	1,682.38	
26 24 16 00-0242	EA	225 Ampere Rating, 42 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	1,840.07	
26 24 16 00-0243	EA	225 Ampere Rating, 54 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	1,960.14	
26 24 16 00-0244	EA	400 Ampere Rating, 30 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	2,286.28	
26 24 16 00-0245	EA	400 Ampere Rating, 42 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	2,399.80	
26 24 16 00-0246	EA	400 Ampere Rating, 54 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	2,526.66	
26 24 16 00-0247	EA	600 Ampere Rating, 30 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	2,766.36	
26 24 16 00-0248	EA	600 Ampere Rating, 42 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	2,959.72	
26 24 16 00-0249	EA	600 Ampere Rating, 54 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	3,363.42	

26 24 16 00-0250 Main Breaker, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase Unassembled Panelboards *(26 24 16 00-0213)*

26 24 16 00-0251	EA	100 Ampere Rating, 12 Circuit Capacity, Main Breaker, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	1,731.20	
26 24 16 00-0252	EA	100 Ampere Rating, 24 Circuit Capacity, Main Breaker, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	1,863.66	
26 24 16 00-0253	EA	100 Ampere Rating, 30 Circuit Capacity, Main Breaker, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	2,042.47	
26 24 16 00-0254	EA	225 Ampere Rating, 30 Circuit Capacity, Main Breaker, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	2,841.35	
26 24 16 00-0255	EA	225 Ampere Rating, 42 Circuit Capacity, Main Breaker, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	3,001.20	
26 24 16 00-0256	EA	225 Ampere Rating, 54 Circuit Capacity, Main Breaker, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	3,153.42	
26 24 16 00-0257	EA	400 Ampere Rating, 30 Circuit Capacity, Main Breaker, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	4,714.66	
26 24 16 00-0258	EA	400 Ampere Rating, 42 Circuit Capacity, Main Breaker, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	4,918.00	
26 24 16 00-0259	EA	400 Ampere Rating, 54 Circuit Capacity, Main Breaker, NEMA 3R, 5, Or 12, 240 Volt AC, 48 Volt DC, 4 Wire, 3 Phase, Unassembled Panelboard	5,092.14	

26 24 16 00-0260 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboards *(26 24 16 00-0169)*

Note: As manufactured by Square D or equal.

26 24 16 00-0261 Main Lugs, NEMA 1, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboards *(26 24 16 00-0260)*

26 24 16 00-0262	EA	125 Ampere Rating, 12 Circuit Capacity, Main Lugs, NEMA 1, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	1,015.67	
26 24 16 00-0263	EA	125 Ampere Rating, 18 Circuit Capacity, Main Lugs, NEMA 1, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	1,115.02	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 16 00-0264	EA	250 Ampere Rating, 30 Circuit Capacity, Main Lugs, NEMA 1, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	1,540.04	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0265	EA	250 Ampere Rating, 42 Circuit Capacity, Main Lugs, NEMA 1, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	1,717.37	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0266	EA	250 Ampere Rating, 54 Circuit Capacity, Main Lugs, NEMA 1, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	1,870.77	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0267	EA	400 Ampere Rating, 30 Circuit Capacity, Main Lugs, NEMA 1, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	1,867.17	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0268	EA	400 Ampere Rating, 42 Circuit Capacity, Main Lugs, NEMA 1, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	1,968.01	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0269	EA	400 Ampere Rating, 54 Circuit Capacity, Main Lugs, NEMA 1, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	2,138.16	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0270	EA	600 Ampere Rating, 30 Circuit Capacity, Main Lugs, NEMA 1, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	2,261.75	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0271	EA	600 Ampere Rating, 42 Circuit Capacity, Main Lugs, NEMA 1, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	2,424.41	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0272	EA	600 Ampere Rating, 54 Circuit Capacity, Main Lugs, NEMA 1, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	2,647.70	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	

26 24 16 00-0273 Main Breaker, NEMA 1, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboards *(26 24 16 00-0260)*

26 24 16 00-0274	EA	100 Ampere Rating, 12 Circuit Capacity, Main Breaker, NEMA 1, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	2,080.11	
26 24 16 00-0275	EA	100 Ampere Rating, 18 Circuit Capacity, Main Breaker, NEMA 1, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	2,145.76	
26 24 16 00-0276	EA	125 Ampere Rating, 18 Circuit Capacity, Main Breaker, NEMA 1, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	2,329.65	
26 24 16 00-0277	EA	125 Ampere Rating, 30 Circuit Capacity, Main Breaker, NEMA 1, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	2,455.19	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0278	EA	125 Ampere Rating, 42 Circuit Capacity, Main Breaker, NEMA 1, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	2,705.80	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0279	EA	250 Ampere Rating, 30 Circuit Capacity, Main Breaker, NEMA 1, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	3,516.53	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0280	EA	250 Ampere Rating, 42 Circuit Capacity, Main Breaker, NEMA 1, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	3,672.15	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0281	EA	250 Ampere Rating, 54 Circuit Capacity, Main Breaker, NEMA 1, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	3,872.91	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0282	EA	400 Ampere Rating, 30 Circuit Capacity, Main Breaker, NEMA 1, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	3,999.21	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0283	EA	400 Ampere Rating, 42 Circuit Capacity, Main Breaker, NEMA 1, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	4,209.82	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0284	EA	400 Ampere Rating, 54 Circuit Capacity, Main Breaker, NEMA 1, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	4,400.57	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	

26 24 16 00-0285 Main Lugs, NEMA 3R, 5, Or 12, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboards *(26 24 16 00-0260)*

26 24 16 00-0286	EA	125 Ampere Rating, 12 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	1,634.96	
26 24 16 00-0287	EA	125 Ampere Rating, 18 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	1,734.31	
26 24 16 00-0288	EA	250 Ampere Rating, 30 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	2,144.67	
26 24 16 00-0289	EA	250 Ampere Rating, 42 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	2,428.27	
26 24 16 00-0290	EA	250 Ampere Rating, 54 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	2,569.45	
26 24 16 00-0291	EA	400 Ampere Rating, 30 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	2,565.85	
26 24 16 00-0292	EA	400 Ampere Rating, 42 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	2,648.37	
26 24 16 00-0293	EA	400 Ampere Rating, 54 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	2,792.26	
26 24 16 00-0294	EA	600 Ampere Rating, 30 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	2,976.92	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 16 00-0295	EA	600 Ampere Rating, 42 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	3,124.62	
26 24 16 00-0296	EA	600 Ampere Rating, 54 Circuit Capacity, Main Lugs, NEMA 3R, 5, Or 12, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	3,315.78	

26 24 16 00-0297 Main Breaker, NEMA 3R, 5, Or 12, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboards *(26 24 16 00-0260)*

26 24 16 00-0298	EA	100 Ampere Rating, 12 Circuit Capacity, Main Breaker, NEMA 3R, 5, Or 12, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	2,831.32	
26 24 16 00-0299	EA	100 Ampere Rating, 18 Circuit Capacity, Main Breaker, NEMA 3R, 5, Or 12, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	2,896.97	
26 24 16 00-0300	EA	125 Ampere Rating, 18 Circuit Capacity, Main Breaker, NEMA 3R, 5, Or 12, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	2,939.78	
26 24 16 00-0301	EA	125 Ampere Rating, 30 Circuit Capacity, Main Breaker, NEMA 3R, 5, Or 12, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	3,059.82	
26 24 16 00-0302	EA	125 Ampere Rating, 42 Circuit Capacity, Main Breaker, NEMA 3R, 5, Or 12, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	3,416.70	
26 24 16 00-0303	EA	250 Ampere Rating, 30 Circuit Capacity, Main Breaker, NEMA 3R, 5, Or 12, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	4,215.21	
26 24 16 00-0304	EA	250 Ampere Rating, 42 Circuit Capacity, Main Breaker, NEMA 3R, 5, Or 12, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	4,352.51	
26 24 16 00-0305	EA	250 Ampere Rating, 54 Circuit Capacity, Main Breaker, NEMA 3R, 5, Or 12, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	4,527.01	
26 24 16 00-0306	EA	400 Ampere Rating, 30 Circuit Capacity, Main Breaker, NEMA 3R, 5, Or 12, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	4,653.31	
26 24 16 00-0307	EA	400 Ampere Rating, 42 Circuit Capacity, Main Breaker, NEMA 3R, 5, Or 12, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	4,847.16	
26 24 16 00-0308	EA	400 Ampere Rating, 54 Circuit Capacity, Main Breaker, NEMA 3R, 5, Or 12, 480Y/277 Volt AC, 3 Wire, 1 Phase, Unassembled Panelboard	5,035.34	

26 24 16 00-0309 480Y/277 Volt AC, 4 Wire, 3 Phase, Unassembled Panelboards *(26 24 16 00-0169)*

Note: As manufactured by Square D or equal.

26 24 16 00-0310 Main Lugs, NEMA 1, 480Y/277 Volt AC, 4 Wire, 3 Phase, Unassembled Panelboards *(26 24 16 00-0309)*

26 24 16 00-0311	EA	125 Ampere Rating, 12 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 1, Main Lugs, Unassembled Panelboard	1,057.20	
26 24 16 00-0312	EA	125 Ampere Rating, 18 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 1, Main Lugs, Unassembled Panelboard	1,157.16	
26 24 16 00-0313	EA	125 Ampere Rating, 30 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 1, Main Lugs, Unassembled Panelboard	1,339.10	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0314	EA	250 Ampere Rating, 30 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 1, Main Lugs, Unassembled Panelboard	1,601.15	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0315	EA	250 Ampere Rating, 42 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 1, Main Lugs, Unassembled Panelboard	1,779.82	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0316	EA	250 Ampere Rating, 54 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 1, Main Lugs, Unassembled Panelboard	1,932.04	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0317	EA	400 Ampere Rating, 30 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 1, Main Lugs, Unassembled Panelboard	1,947.93	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0318	EA	400 Ampere Rating, 42 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 1, Main Lugs, Unassembled Panelboard	2,068.17	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0319	EA	400 Ampere Rating, 54 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 1, Main Lugs, Unassembled Panelboard	2,237.02	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0320	EA	600 Ampere Rating, 30 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 1, Main Lugs, Unassembled Panelboard	2,360.83	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0321	EA	600 Ampere Rating, 42 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 1, Main Lugs, Unassembled Panelboard	2,524.27	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0322	EA	600 Ampere Rating, 54 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 1, Main Lugs, Unassembled Panelboard	2,748.40	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	

26 24 16 00-0323 Main Breaker, NEMA 1, 480Y/277 Volt AC, 4 Wire, 3 Phase, Unassembled Panelboards *(26 24 16 00-0309)*

26 24 16 00-0324	EA	100 Ampere Rating, 12 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 1, Main Breaker, Unassembled Panelboard	2,293.87	
26 24 16 00-0325	EA	100 Ampere Rating, 18 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 1, Main Breaker, Unassembled Panelboard	2,360.13	
26 24 16 00-0326	EA	100 Ampere Rating, 30 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 1, Main Breaker, Unassembled Panelboard	2,557.53	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 16 00-0327	EA	125 Ampere Rating, 18 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 1, Main Breaker, Unassembled Panelboard	2,623.49	
26 24 16 00-0328	EA	125 Ampere Rating, 30 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 1, Main Breaker, Unassembled Panelboard	2,749.53	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0329	EA	125 Ampere Rating, 42 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 1, Main Breaker, Unassembled Panelboard	2,999.50	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0330	EA	250 Ampere Rating, 30 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 1, Main Breaker, Unassembled Panelboard	3,861.19	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0331	EA	250 Ampere Rating, 42 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 1, Main Breaker, Unassembled Panelboard	4,018.69	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0332	EA	250 Ampere Rating, 54 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 1, Main Breaker, Unassembled Panelboard	4,217.33	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	
26 24 16 00-0333	EA	400 Ampere Rating, 30 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 1, Main Breaker, Unassembled Panelboard	4,412.20	
		For Door-In-Door (Hinged) Trim Front, Add	*130.20*	
26 24 16 00-0334	EA	400 Ampere Rating, 42 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 1, Main Breaker, Unassembled Panelboard	4,624.85	
		For Door-In-Door (Hinged) Trim Front, Add	*222.37*	
26 24 16 00-0335	EA	400 Ampere Rating, 54 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 1, Main Breaker, Unassembled Panelboard	4,815.47	
		For Door-In-Door (Hinged) Trim Front, Add	*284.20*	

26 24 16 00-0336 Main Lugs, NEMA 3R, 5, Or 12, 480Y/277 Volt AC, 4 Wire, 3 Phase, Unassembled Panelboards *(26 24 16 00-0309)*

26 24 16 00-0337	EA	125 Ampere Rating, 12 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 3R, 5, 12, Main Lugs, Unassembled Panelboard	1,676.49	
26 24 16 00-0338	EA	125 Ampere Rating, 18 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 3R, 5, 12, Main Lugs, Unassembled Panelboard	1,776.45	
26 24 16 00-0339	EA	125 Ampere Rating, 30 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 3R, 5, 12, Main Lugs, Unassembled Panelboard	1,949.23	
26 24 16 00-0340	EA	250 Ampere Rating, 30 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 3R, 5, 12, Main Lugs, Unassembled Panelboard	2,205.78	
26 24 16 00-0341	EA	250 Ampere Rating, 42 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 3R, 5, 12, Main Lugs, Unassembled Panelboard	2,490.72	
26 24 16 00-0342	EA	250 Ampere Rating, 54 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 3R, 5, 12, Main Lugs, Unassembled Panelboard	2,630.73	
26 24 16 00-0343	EA	400 Ampere Rating, 30 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 3R, 5, 12, Main Lugs, Unassembled Panelboard	2,648.45	
26 24 16 00-0344	EA	400 Ampere Rating, 42 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 3R, 5, 12, Main Lugs, Unassembled Panelboard	2,748.53	
26 24 16 00-0345	EA	400 Ampere Rating, 54 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 3R, 5, 12, Main Lugs, Unassembled Panelboard	2,891.12	
26 24 16 00-0346	EA	600 Ampere Rating, 30 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 3R, 5, 12, Main Lugs, Unassembled Panelboard	3,076.01	
26 24 16 00-0347	EA	600 Ampere Rating, 42 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 3R, 5, 12, Main Lugs, Unassembled Panelboard	3,224.17	
26 24 16 00-0348	EA	600 Ampere Rating, 54 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 3R, 5, 12, Main Lugs, Unassembled Panelboard	3,415.33	

26 24 16 00-0349 Main Breaker, NEMA 3R, 5, Or 12, 480Y/277 Volt AC, 4 Wire, 3 Phase, Unassembled Panelboards *(26 24 16 00-0309)*

26 24 16 00-0350	EA	100 Ampere Rating, 12 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 3R, 5, 12, Main Breaker, Unassembled Panelboard	2,898.50	
26 24 16 00-0351	EA	100 Ampere Rating, 18 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 3R, 5, 12, Main Breaker, Unassembled Panelboard	2,964.76	
26 24 16 00-0352	EA	100 Ampere Rating, 30 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 3R, 5, 12, Main Breaker, Unassembled Panelboard	3,268.43	
26 24 16 00-0353	EA	125 Ampere Rating, 18 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 3R, 5, 12, Main Breaker, Unassembled Panelboard	3,233.62	
26 24 16 00-0354	EA	125 Ampere Rating, 30 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 3R, 5, 12, Main Breaker, Unassembled Panelboard	3,354.16	
26 24 16 00-0355	EA	125 Ampere Rating, 42 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 3R, 5, 12, Main Breaker, Unassembled Panelboard	3,710.40	
26 24 16 00-0356	EA	250 Ampere Rating, 30 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 3R, 5, 12, Main Breaker, Unassembled Panelboard	4,559.87	
26 24 16 00-0357	EA	250 Ampere Rating, 42 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 3R, 5, 12, Main Breaker, Unassembled Panelboard	4,699.05	
26 24 16 00-0358	EA	250 Ampere Rating, 54 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 3R, 5, 12, Main Breaker, Unassembled Panelboard	4,871.43	
26 24 16 00-0359	EA	400 Ampere Rating, 30 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 3R, 5, 12, Main Breaker, Unassembled Panelboard	5,066.30	
26 24 16 00-0360	EA	400 Ampere Rating, 42 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 3R, 5, 12, Main Breaker, Unassembled Panelboard	5,261.85	
26 24 16 00-0361	EA	400 Ampere Rating, 54 Circuit Capacity, 277/480 Volt, 4 Wire, 3 Phase, NEMA 3R, 5, 12, Main Breaker, Unassembled Panelboard	5,449.42	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 16 00-0362		600 Volt AC, 250 Volt DC, 3 Phase, Unassembled Panelboards *(26 24 16 00-0169)* Note: Square D I-Line or equal.		
26 24 16 00-0363		Main Lugs, NEMA 1, 600 Volt AC, 250 Volt DC, 3 Phase, Unassembled Panelboards *(26 24 16 00-0362)*		
26 24 16 00-0364	EA	400 Ampere Rating, 27" Breaker Mounting Space, 250 Ampere Maximum Branch Breaker Size, Main Lugs, NEMA 1, 600 Volt AC, 250 Volt DC, 3 Phase, Unassembled Panelboard	1,813.29	335.44
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*201.26*	
26 24 16 00-0365	EA	400 Ampere Rating, 45" Breaker Mounted Space, 250 Ampere Maximum Branch Breaker Size, Main Lugs, NEMA 1, 600 Volt AC, 250 Volt DC, 3 Phase, Unassembled Panelboard	2,119.43	335.33
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*201.21*	
26 24 16 00-0366	EA	400 Ampere Rating, 63" Breaker Mounting Space, 250 Ampere Maximum Branch Breaker Size, Main Lugs, NEMA 1, 600 Volt AC, 250 Volt DC, 3 Phase, Unassembled Panelboard	2,349.96	335.33
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*201.21*	
26 24 16 00-0367	EA	600 Ampere Rating, 27" Breaker Mounting Space, 250 Ampere Maximum Branch Breaker Size, Main Lugs, NEMA 1, 600 Volt AC, 250 Volt DC, 3 Phase, Unassembled Panelboard	2,692.27	550.71
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*330.43*	
26 24 16 00-0368	EA	600 Ampere Rating, 45" Breaker Mounting Space, 250 Ampere Maximum Branch Breaker Size, Main Lugs, NEMA 1, 600 Volt AC, 250 Volt DC, 3 Phase, Unassembled Panelboard	2,870.69	550.71
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*330.43*	
26 24 16 00-0369	EA	600 Ampere Rating, 63" Breaker Mounting Space, 250 Ampere Maximum Branch Breaker Size, Main Lugs, NEMA 1, 600 Volt AC, 250 Volt DC, 3 Phase, Unassembled Panelboard	3,066.49	550.71
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*330.43*	
26 24 16 00-0370	EA	800 Ampere Rating, 27" Breaker Mounting Space, 250 Ampere Maximum Branch Breaker Size, Main Lugs, NEMA 1, 600 Volt AC, 250 Volt DC, 3 Phase, Unassembled Panelboard	3,322.57	732.08
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*439.22*	
26 24 16 00-0371	EA	800 Ampere Rating, 45" Breaker Mounting Space, 250 Ampere Maximum Branch Breaker Size, Main Lugs, NEMA 1, 600 Volt AC, 250 Volt DC, 3 Phase, Unassembled Panelboard	3,494.42	734.24
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*440.57*	
26 24 16 00-0372	EA	800 Ampere Rating, 63" Breaker Mounting Space, 250 Ampere Maximum Branch Breaker Size, Main Lugs, NEMA 1, 600 Volt AC, 250 Volt DC, 3 Phase, Unassembled Panelboard	3,564.15	732.08
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*439.22*	
26 24 16 00-0373	EA	800 Ampere Rating, 99" Breaker Mounting Space, 250 Ampere Maximum Branch Breaker Size, Main Lugs, NEMA 1, 600 Volt AC, 250 Volt DC, 3 Phase, Unassembled Panelboard	4,130.23	732.08
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*439.22*	
26 24 16 00-0374	EA	1,200 Ampere Rating, 27" Breaker Mounting Space, 600 Ampere Maximum Branch Breaker Size, Main Lugs, NEMA 1, 600 Volt AC, 250 Volt DC, 3 Phase, Unassembled Panelboard	5,393.22	1,101.41
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*660.85*	
26 24 16 00-0375	EA	1,200 Ampere Rating, 45" Breaker Mounting Space, 600 Ampere Maximum Branch Breaker Size, Main Lugs, NEMA 1, 600 Volt AC, 250 Volt DC, 3 Phase, Unassembled Panelboard	5,778.49	1,101.41
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*660.85*	
26 24 16 00-0376	EA	1,200 Ampere Rating, 63" Breaker Mounting Space, 600 Ampere Maximum Branch Breaker Size, Main Lugs, NEMA 1, 600 Volt AC, 250 Volt DC, 3 Phase, Unassembled Panelboard	6,093.50	1,101.41
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*660.85*	
26 24 16 00-0377	EA	1,200 Ampere Rating, 99" Breaker Mounting Space, 600 Ampere Maximum Branch Breaker Size, Main Lugs, NEMA 1, 600 Volt AC, 250 Volt DC, 3 Phase, Unassembled Panelboard	6,477.99	1,101.41
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*660.85*	
26 24 16 00-0378		Main Breaker, NEMA 1, 600 Volt AC, 250 Volt DC, 3 Phase, Unassembled Panelboards *(26 24 16 00-0362)*		
26 24 16 00-0379	EA	225 Ampere Rating, 36" Breaker Mounting Space, 250 Ampere Maximum Branch Breaker Size, Main Breaker, NEMA 1, 600 Volt AC, 250 Volt DC, 3 Phase, Unassembled Panelboard	3,483.04	342.55
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*205.52*	
26 24 16 00-0380	EA	400 Ampere Rating, 27" Breaker Mounting Space, 250 Ampere Maximum Branch Breaker Size, Main Breaker, NEMA 1, 600 Volt AC, 250 Volt DC, 3 Phase, Unassembled Panelboard	4,568.24	388.50
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*233.12*	
26 24 16 00-0381	EA	400 Ampere Rating, 45" Breaker Mounting Space, 250 Ampere Maximum Branch Breaker Size, Main Breaker, NEMA 1, 600 Volt AC, 250 Volt DC, 3 Phase, Unassembled Panelboard	4,790.88	388.50
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*233.12*	
26 24 16 00-0382	EA	400 Ampere Rating, 81" Breaker Mounting Space, 250 Ampere Maximum Branch Breaker Size, Main Breaker, NEMA 1, 600 Volt AC, 250 Volt DC, 3 Phase, Unassembled Panelboard	5,446.16	388.50
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*233.12*	
26 24 16 00-0383	EA	600 Ampere Rating, 36" Breaker Mounting Space, 250 Ampere Maximum Branch Breaker Size, Main Breaker, NEMA 1, 600 Volt AC, 250 Volt DC, 3 Phase, Unassembled Panelboard	7,112.15	636.86
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*382.14*	
26 24 16 00-0384	EA	600 Ampere Rating, 72" Breaker Mounting Space, 250 Ampere Maximum Branch Breaker Size, Main Breaker, NEMA 1, 600 Volt AC, 250 Volt DC, 3 Phase, Unassembled Panelboard	7,480.29	638.61
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*383.15*	
26 24 16 00-0385	EA	600 Ampere Rating, 72" Breaker Mounting Space, 600 Ampere Maximum Branch Breaker Size, Main Breaker, NEMA 1, 600 Volt AC, 250 Volt DC, 3 Phase, Unassembled Panelboard	7,783.23	636.86
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*382.14*	
26 24 16 00-0386	EA	800 Ampere Rating, 36" Breaker Mounting Space, 250 Ampere Maximum Branch Breaker Size, Main Breaker, NEMA 1, 600 Volt AC, 250 Volt DC, 3 Phase, Unassembled Panelboard	8,995.52	851.41
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*510.87*	
26 24 16 00-0387	EA	800 Ampere Rating, 72" Breaker Mounting Space, 250 Ampere Maximum Branch Breaker Size, Main Breaker, NEMA 1, 600 Volt AC, 250 Volt DC, 3 Phase, Unassembled Panelboard	9,430.85	848.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*509.07*	
26 24 16 00-0388	EA	800 Ampere Rating, 72" Breaker Mounting Space, 600 Ampere Maximum Branch Breaker Size, Main Breaker, NEMA 1, 600 Volt AC, 250 Volt DC, 3 Phase, Unassembled Panelboard	9,865.07	848.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*509.07*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 16 00-0389		**Residential Lighting And Power Panelboards** *(26 24 16 00-0001)* See CSI section 26 28 16 13-0001 for circuit breakers.		
26 24 16 00-0390		**Residential Type Unassembled Load Center** *(26 24 16 00-0389)* Note: Interior box and cover, includes ground bar kit.		
26 24 16 00-0391		**Main Lug Load Center, Single Phase, 3 Wire, 120/240 Volt** *(26 24 16 00-0390)*		
26 24 16 00-0392	EA	30 Ampere Rating, 2 Circuit, Main Lug Load Center, 3 Wire, 120/240 Volt, Single Phase, Unassembled Panelboard	151.42	56.40
26 24 16 00-0393	EA	70 Ampere Rating, 4 Circuit, Main Lug Load Center, 3 Wire, 120/240 Volt, Single Phase, Unassembled Panelboard	508.59	225.60
26 24 16 00-0394	EA	100 Ampere Rating, 8 Circuit, Main Lug Load Center, 3 Wire, 120/240 Volt, Single Phase, Unassembled Panelboard	768.30	322.05
26 24 16 00-0395	EA	125 Ampere Rating, 24 Circuit, Main Lug Load Center, 3 Wire, 120/240 Volt, Single Phase, Unassembled Panelboard	1,642.01	676.92
26 24 16 00-0396	EA	150 Ampere Rating, 30 Circuit, Main Lug Load Center, 3 Wire, 120/240 Volt, Single Phase, Unassembled Panelboard	1,795.59	733.20
26 24 16 00-0397		**Main Lug Load Center, 3 Phase, 4 Wire, 208 Y/120 Volt AC** *(26 24 16 00-0390)* Note: 3 Phase, 4 wire, 240/120 Volt AC Delta; 3 phase, 3 wire, 240 Volt AC Delta.		
26 24 16 00-0398	EA	60 Ampere Rating, 3 Circuit, Main Lug Load Center, 3 Phase 4 Wire, 208 Y/120 Volt AC, 3 Phase 4 Wire 240/120 Volt AC Delta, 3 Phase 3 Wire 240 Volt AC Delta, Unassembled Panelboard	210.56	62.04
26 24 16 00-0399	EA	125 Ampere Rating, 3 Circuit, Main Lug Load Center, 3 Phase 4 Wire, 208 Y/120 Volt AC, 3 Phase 4 Wire 240/120 Volt AC Delta, 3 Phase 3 Wire 240 Volt AC Delta, Unassembled Panelboard	376.01	67.68
26 24 16 00-0400		**Main Lug Load Center, Single Phase, 3 Wire, 120/240 Volt, Rainproof** *(26 24 16 00-0390)*		
26 24 16 00-0401	EA	40 Ampere Rating, 2 Circuit, Main Lug Load Center, 3 Wire 120/240 Volt, 1 Phase, Rainproof, Unassembled Panelboard	214.10	62.04
26 24 16 00-0402	EA	70 Ampere Rating, 4 Circuit, Main Lug Load Center, 3 Wire 120/240 Volt, 1 Phase, Rainproof, Unassembled Panelboard	238.76	67.68
26 24 16 00-0403	EA	100 Ampere Rating, 8 Circuit, Main Lug Load Center, 3 Wire 120/240 Volt, 1 Phase, Rainproof, Unassembled Panelboard	839.08	322.05
26 24 16 00-0404	EA	150 Ampere Rating, 30 Circuit, Main Lug Load Center, 3 Wire 120/240 Volt, 1 Phase, Rainproof, Unassembled Panelboard	1,903.29	733.20
26 24 16 00-0405		**Main Lug Load Center, 3 Phase, 4 Wire, 208 Y/120 Volt AC** *(26 24 16 00-0390)* Note: 3 Phase, 4 wire, 240/120 Volt AC Delta; 3 phase, 3 wire, 240 Volt AC Delta, Rainproof.		
26 24 16 00-0406	EA	60 Ampere Rating, 3 Circuit, Main Lug Load Center, 3 Phase 4 Wire, 208 Y/120 Volt AC, 3 Phase 4 Wire 240/120 Volt AC Delta, 3 Phase 3 Wire 240 Volt AC Delta, Rainproof, Unassembled Panelboard	264.41	62.04
26 24 16 00-0407	EA	125 Ampere Rating, 20 Circuit, Main Lug Load Center, 3 Phase 4 Wire, 208 Y/120 Volt AC, 3 Phase 4 Wire 240/120 Volt AC Delta, 3 Phase 3 Wire 240 Volt AC Delta, Rainproof, Unassembled Panelboard	1,839.11	676.92
26 24 16 00-0408		**Main Breaker Load Center, Single Phase, 3 Wire, 120/240 Volt** *(26 24 16 00-0390)*		
26 24 16 00-0409	EA	125 Ampere Rating, 24 Circuit, Main Breaker Load Center, 3 Wire, 120/240 Volt, Single Phase, Unassembled Panelboard	1,977.43	676.92
26 24 16 00-0410	EA	150 Ampere Rating, 30 Circuit, Main Breaker Load Center, 3 Wire, 120/240 Volt, Single Phase, Unassembled Panelboard	2,146.40	733.20
26 24 16 00-0411	EA	300 Ampere Rating, 42 Circuit, Main Breaker Load Center, 3 Wire, 120/240 Volt, Single Phase, Unassembled Panelboard	7,509.87	1,128.00
26 24 16 00-0412		**Main Breaker Load Center, 3 Phase, 4 Wire, 208 Y/120 Volt AC** *(26 24 16 00-0390)* Note: 3 Phase, 4 wire, 240/120 Volt AC Delta; 3 phase, 3 wire, 240 V Delta.		
26 24 16 00-0413	EA	125 Ampere Rating, 30 Circuit, Main Breaker Load Center, 3 Phase 4 Wire, 208 Y/120 Volt AC, 3 Phase 4 Wire 240/120 Volt AC Delta, 3 Phase 3 Wire 240 Volt AC Delta, Unassembled Panelboard	2,871.08	676.92
26 24 16 00-0414	EA	150 Ampere Rating, 40 Circuit, Main Breaker Load Center, 3 Phase 4 Wire, 208 Y/120 Volt AC, 3 Phase 4 Wire 240/120 Volt AC Delta, 3 Phase 3 Wire 240 Volt AC Delta, Unassembled Panelboard	3,131.59	733.20
26 24 16 00-0415	EA	300 Ampere Rating, 42 Circuit, Main Breaker Load Center, 3 Phase 4 Wire, 208 Y/120 Volt AC, 3 Phase 4 Wire 240/120 Volt AC Delta, 3 Phase 3 Wire 240 Volt AC Delta, Unassembled Panelboard	8,261.80	1,128.00
26 24 16 00-0416		**Main Breaker Load Center, Single Phase, 3 Wire, 120/240 Volt, Rainproof** *(26 24 16 00-0390)*		
26 24 16 00-0417	EA	125 Ampere Rating, 24 Circuit, Main Breaker Load Center, 3 Wire 120/240 Volt, 1 Phase, Rainproof, Unassembled Panelboard	2,077.44	676.92
26 24 16 00-0418	EA	150 Ampere Rating, 30 Circuit, Main Breaker Load Center, 3 Wire 120/240 Volt, 1 Phase, Rainproof, Unassembled Panelboard	2,317.19	733.20
26 24 16 00-0419		**Main Breaker Load Center, 3 Phase 4 Wire, 208 Y/120 Volt AC** *(26 24 16 00-0390)* Note: 3 Phase, 4 wire, 240/120 Volt AC Delta; 3 phase, 3 wire, 240 Volt AC Delta, Rainproof.		
26 24 16 00-0420	EA	125 Ampere Rating, 30 Circuit, Main Breaker Load Center, 3 Phase 4 Wire, 208 Y/120 Volt AC, 3 Phase 4 Wire 240/120 Volt AC Delta, 3 Phase 3 Wire 240 Volt AC Delta, Rainproof, Unassembled Panelboard	3,036.94	676.92
26 24 16 00-0421	EA	155 Ampere Rating, 30 Circuit, Main Breaker Load Center, 3 Phase 4 Wire, 208 Y/120 Volt AC, 3 Phase 4 Wire 240/120 Volt AC Delta, 3 Phase 3 Wire 240 Volt AC Delta, Rainproof, Unassembled Panelboard	3,149.59	733.20
26 24 16 00-0422		**Residential Type Assembled Load Center** *(26 24 16 00-0389)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 16 00-0423		**Main Lug Load Center, 3 Wire, 20 Amperes, 120/240 Volt, 1 Phase** *(26 24 16 00-0422)*		
		Note: Includes 1 pole plug-in breaker.		
26 24 16 00-0424	EA	100 Ampere Rating, Main Lugs, Indoor 8 Circuits, 3 Wire, 120/240 Volt, 1 Phase, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	768.76	322.05
26 24 16 00-0425	EA	100 Ampere Rating, Main Lugs, Indoor 12 Circuits, 3 Wire, 120/240 Volt, 1 Phase, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	935.51	376.18
26 24 16 00-0426	EA	100 Ampere Rating, Main Lugs, Rainproof, 8 Circuits, 3 Wire, 120/240 Volt, 1 Phase, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	785.69	322.05
26 24 16 00-0427	EA	100 Ampere Rating, Main Lugs, Rainproof, 12 Circuits, 3 Wire, 120/240 Volt, 1 Phase, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	940.12	376.18
26 24 16 00-0428	EA	200 Ampere Rating, Main Lugs, Indoor, 8 Circuits, 3 Wire, 120/240 Volt, 1 Phase, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	1,362.89	501.40
26 24 16 00-0429	EA	200 Ampere Rating, Main Lugs, Indoor, 20 Circuits, 3 Wire, 120/240 Volt, 1 Phase, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	1,608.25	601.79
26 24 16 00-0430	EA	200 Ampere Rating, Main Lugs, Indoor, 24 Circuits, 3 Wire, 120/240 Volt, 1 Phase, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	1,839.30	694.29
26 24 16 00-0431	EA	200 Ampere Rating, Main Lugs, Indoor, 30 Circuits, 3 Wire, 120/240 Volt, 1 Phase, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	2,026.35	751.59
26 24 16 00-0432	EA	200 Ampere Rating, Main Lugs, Indoor, 42 Circuits, 3 Wire, 120/240 Volt, 1 Phase, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	3,033.03	1,128.00
26 24 16 00-0433	EA	200 Ampere Rating, Main Lugs, Rainproof, 16 Circuits, 3 Wire, 120/240 Volt, 1 Phase, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	1,422.90	501.40
26 24 16 00-0434	EA	200 Ampere Rating, Main Lugs, Rainproof, 20 Circuits, 3 Wire, 120/240 Volt, 1 Phase, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	1,665.18	601.79
26 24 16 00-0435	EA	200 Ampere Rating, Main Lugs, Rainproof, 24 Circuits, 3 Wire, 120/240 Volt, 1 Phase, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	1,896.23	694.29
26 24 16 00-0436	EA	200 Ampere Rating, Main Lugs, Rainproof, 30 Circuits, 3 Wire, 120/240 Volt, 1 Phase, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	2,080.20	751.59
26 24 16 00-0437	EA	200 Ampere Rating, Main Lugs, Rainproof, 42 Circuits, 3 Wire, 120/240 Volt, 1 Phase, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	3,209.97	1,128.00
26 24 16 00-0438	EA	400 Ampere Rating, Main Lugs, Indoor, 42 Circuits, 3 Wire, 120/240 Volt, 1 Phase, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	3,729.90	1,253.33
26 24 16 00-0439	EA	400 Ampere Rating, Main Lugs, Rainproof, 42 Circuits, 3 Wire, 120/240 Volt, 1 Phase, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	3,914.54	1,253.33
26 24 16 00-0440		**Main Lug Load Center, 4 Wire, 20 Amperes, 120/208 Volt** *(26 24 16 00-0422)*		
		Note: Includes 1 pole plug-in breaker.		
26 24 16 00-0441	EA	125 Ampere Rating, Main Lugs, Indoor, 12 Circuit, 4 Wire, 120/208 Volt, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	1,021.67	376.18
26 24 16 00-0442	EA	125 Ampere Rating, Main Lugs, Indoor, 18 Circuit, 4 Wire, 120/208 Volt, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	1,523.43	564.00
26 24 16 00-0443	EA	125 Ampere Rating, Main Lugs, Rainproof, 12 Circuits, 4 Wire, 120/208 Volt, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	1,072.45	376.18
26 24 16 00-0444	EA	125 Ampere Rating, Main Lugs, Rainproof, 18 Circuits, 4 Wire, 120/208 Volt, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	1,569.59	564.00
26 24 16 00-0445	EA	200 Ampere Rating, Main Lugs, Indoor, 24 Circuit, 4 Wire, 120/208 Volt, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	1,927.01	694.29
26 24 16 00-0446	EA	200 Ampere Rating, Main Lugs, Indoor, 30 Circuit, 4 Wire, 120/208 Volt, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	2,104.08	752.04
26 24 16 00-0447	EA	200 Ampere Rating, Main Lugs, Indoor, 36 Circuit, 4 Wire, 120/208 Volt, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	2,574.70	902.75
26 24 16 00-0448	EA	200 Ampere Rating, Main Lugs, Indoor, 42 Circuit, 4 Wire, 120/208 Volt, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	3,094.57	1,128.00
26 24 16 00-0449	EA	200 Ampere Rating, Main Lugs, Rainproof, 24 Circuits, 4 Wire, 120/208 Volt, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	1,980.86	694.29
26 24 16 00-0450	EA	200 Ampere Rating, Main Lugs, Rainproof, 30 Circuits, 4 Wire, 120/208 Volt, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	2,164.83	751.59
26 24 16 00-0451	EA	200 Ampere Rating, Main Lugs, Rainproof, 36 Circuits, 4 Wire, 120/208 Volt, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	2,781.27	902.07
26 24 16 00-0452	EA	200 Ampere Rating, Main Lugs, Rainproof, 42 Circuits, 4 Wire, 120/208 Volt, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	3,302.29	1,128.00
26 24 16 00-0453	EA	400 Ampere Rating, Main Lugs, Indoor, 42 Circuit, 4 Wire, 120/208 Volt, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	3,776.06	1,253.33
26 24 16 00-0454	EA	400 Ampere Rating, Main Lugs, Rainproof, 42 Circuits, 4 Wire, 120/208 Volt, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	3,960.70	1,253.33
26 24 16 00-0455		**Main Breaker Load Center, 3 Wire, 20 Amperes, 120/240 Volt, 1 Phase** *(26 24 16 00-0422)*		
		Note: Includes 1 pole plug-in breaker.		
26 24 16 00-0456	EA	125 Ampere Rating, Main Breaker, Indoor, 12 Circuit, 3 Wire, 120/240 Volt, 1 Phase, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	1,015.52	376.18
26 24 16 00-0457	EA	125 Ampere Rating, Main Breaker, Indoor, 18 Circuit, 3 Wire, 120/240 Volt, 1 Phase, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	1,501.89	564.00
26 24 16 00-0458	EA	200 Ampere Rating, Main Breaker, Indoor, 20 Circuit, 3 Wire, 120/240 Volt, 1 Phase, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	1,734.42	601.79
26 24 16 00-0459	EA	200 Ampere Rating, Main Breaker, Indoor, 24 Circuit, 3 Wire, 120/240 Volt, 1 Phase, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	1,989.23	694.62
26 24 16 00-0460	EA	200 Ampere Rating, Main Breaker, Indoor, 30 Circuit, 3 Wire, 120/240 Volt, 1 Phase, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	2,188.71	752.04
26 24 16 00-0461	EA	200 Ampere Rating, Main Breaker, Indoor, 40 Circuit, 3 Wire, 120/240 Volt, 1 Phase, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	2,898.11	1,002.80

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 16 00-0462	EA	200 Ampere Rating, Main Breaker, Rainproof, 20 Circuits, 3 Wire, 120/240 Volt, 1 Phase, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	1,749.81	601.79
26 24 16 00-0463	EA	200 Ampere Rating, Main Breaker, Rainproof, 24 Circuits, 3 Wire, 120/240 Volt, 1 Phase, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	2,019.32	694.29
26 24 16 00-0464	EA	200 Ampere Rating, Main Breaker, Rainproof, 30 Circuits, 3 Wire, 120/240 Volt, 1 Phase, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	2,195.60	751.59
26 24 16 00-0465	EA	200 Ampere Rating, Main Breaker, Rainproof, 40 Circuits, 3 Wire, 120/240 Volt, 1 Phase, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	2,813.49	1,002.80
26 24 16 00-0466	EA	400 Ampere Rating, Main Breaker, Indoor, 42 Circuit, 3 Wire, 120/240 Volt, 1 Phase, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	5,314.71	1,253.33
26 24 16 00-0467	EA	400 Ampere Rating, Main Breaker, Rainproof, 42 Circuits, 3 Wire, 120/240 Volt, 1 Phase, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	5,622.44	1,253.33
26 24 16 00-0468		Main Breaker Load Center, 4 Wire, 20 Amperes, 120/208 Volt *(26 24 16 00-0422)*		
		Note: Includes 1 pole plug-in breaker.		
26 24 16 00-0469	EA	200 Ampere Rating, Main Breaker, Indoor, 30 Circuit, 4 Wire, 120/208 Volt, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	2,619.53	752.04
26 24 16 00-0470	EA	200 Ampere Rating, Main Breaker, Indoor, 42 Circuit, 4 Wire, 120/208 Volt, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	3,586.94	1,128.00
26 24 16 00-0471	EA	200 Ampere Rating, Main Breaker, Rainproof, 30 Circuits, 4 Wire, 120/208 Volt, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	2,711.05	751.59
26 24 16 00-0472	EA	200 Ampere Rating, Main Breaker, Rainproof, 42 Circuits, 4 Wire, 120/208 Volt, Assembled Panelboard With 20 Ampere, 1 Pole Plug-In Breakers	3,679.26	1,128.00
26 24 16 00-0473		Panel Mounted Accessories And Fuseholders *(26 24 16 00-0001)*		
26 24 16 00-0474		Midget Finger-Safe Fuse Holders *(26 24 16 00-0473)*		
		Note: 30 Amp capacity. Excludes fuse.		
26 24 16 00-0475	EA	1 Pole Midget Finger-Safe Fuse Holder	76.17	20.31
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 24 16 00-0476	EA	1 Pole With Indicator Midget Finger-Safe Fuse Holder	90.87	20.31
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 24 16 00-0477	EA	2 Pole Midget Finger-Safe Fuse Holder	123.60	30.45
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.30*	
26 24 16 00-0478	EA	2 Pole With Indicators Midget Finger-Safe Fuse Holder	161.99	30.45
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.30*	
26 24 16 00-0479	EA	3 Pole Midget Finger-Safe Fuse Holder	182.94	40.61
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 24 16 00-0480	EA	3 Pole With Indicators Midget Finger-Safe Fuse Holder	233.93	40.61
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 24 16 00-0481	EA	3 Pole With 4th Neutral Pole Midget Finger-Safe Fuse Holder Note: With indicators.	276.58	40.61
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 24 16 00-0482	EA	3 Pole With 4th Neutral Pole Midget Finger-Safe Fuse Holder	220.04	40.61
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 24 16 00-0483	EA	4 Pole Midget Finger-Safe Fuse Holder	230.52	50.76
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*33.84*	
26 24 16 00-0484	EA	4 Pole With Indicator Midget Finger-Safe Fuse Holder	286.52	50.76
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*33.84*	
26 24 16 00-0485	EA	12 To 24 Volt DC Midget Finger-Safe Fuse Holder Note: With indicator.	90.92	20.31
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 24 16 00-0486	EA	20 To 24 Volt DC Midget Finger-Safe Fuse Holder Note: With indicator.	98.74	20.31
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 24 16 00-0487	EA	35 To 48 Volt DC Midget Finger-Safe Fuse Holder Note: With indicator.	92.36	20.31
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 24 16 00-0488		Removal And Reinstallation Of Panelboards *(26 24 16 00-0001)*		
		Note: Includes storage, cleaning and supply materials.		
26 24 16 00-0489	EA	Removal And Reinstallation Of Up To 42 Circuit Capacity Panelboards With Breakers Note: Includes removal and reinstallation of main wiring to panelboard.	1,416.20	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*423.00*	
26 24 16 00-0490	EA	Removal And Reinstallation Of Breaker, 1-2-3 Pole, Any Amperage	75.11	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*22.00*	
26 24 16 00-0491	EA	Panelboard Filler Plate, Fits 1" Opening	5.32	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1.06*	
26 24 19		**Motor-Control Centers** *(26 24)*		
26 24 19 00-0001		Combination Starters With Molded Case Circuit Breakers *(26 24 19)*		
		Note: Includes NEMA I enclosure of indoor installation, vertical free standing floor mounted sections (90" high x 20" wide x 16" o 20" Deep), fully factory assembled and wired internally.		
26 24 19 00-0002		230 Volt Combination With Molded Case Circuit, Full Volt *(26 24 19 00-0001)*		
		Note: 1-Speed non-reversing.		
26 24 19 00-0003	EA	230 Volt, Full Volt, 1 Speed, Non-Reversing, 7-1/2 HP Combination With Molded Case Circuit	2,555.34	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 24 19 00-0004	EA	230 Volt, Full Volt, 1 Speed, Non-Reversing, 15 HP Combination With Molded Case Circuit	3,030.09	108.21
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*64.92*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 19 00-0005	EA	230 Volt, Full Volt, 1 Speed, Non-Reversing, 30 HP Combination With Molded Case Circuit	4,522.19	113.36
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*68.01*	
26 24 19 00-0006	EA	230 Volt, Full Volt, 1 Speed, Non-Reversing, 50 HP Combination With Molded Case Circuit	8,217.51	133.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*80.38*	
26 24 19 00-0007	EA	230 Volt, Full Volt, 1 Speed, Non-Reversing, 100 HP Combination With Molded Case Circuit	16,581.84	154.57
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*92.75*	
26 24 19 00-0008	EA	230 Volt, Full Volt, 1 Speed, Non-Reversing, 200 HP Combination With Molded Case Circuit	27,912.60	206.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*123.66*	

26 24 19 00-0009 480 Volt Combination With Molded Case Circuit, Full Volt *(26 24 19 00-0001)*

Note: 1-Speed non-reversing.

26 24 19 00-0010	EA	480 Volt, Full Volt, 1 Speed, Non-Reversing, 10 HP Combination With Molded Case Circuit	2,555.34	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 24 19 00-0011	EA	480 Volt, Full Volt, 1 Speed, Non-Reversing, 25 HP Combination With Molded Case Circuit	3,030.09	108.21
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*64.92*	
26 24 19 00-0012	EA	480 Volt, Full Volt, 1 Speed, Non-Reversing, 50 HP Combination With Molded Case Circuit	4,522.19	113.36
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*68.01*	
26 24 19 00-0013	EA	480 Volt, Full Volt, 1 Speed, Non-Reversing, 100 HP Combination With Molded Case Circuit	8,217.51	133.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*80.38*	
26 24 19 00-0014	EA	480 Volt, Full Volt, 1 Speed, Non-Reversing, 200 HP Combination With Molded Case Circuit	16,581.84	154.57
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*92.75*	
26 24 19 00-0015	EA	480 Volt, Full Volt, 1 Speed, Non-Reversing, 400 HP Combination With Molded Case Circuit	27,912.60	206.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*123.66*	

26 24 19 00-0016 230 Volt Combination With Molded Case Circuit, Full Volt *(26 24 19 00-0001)*

Note: 1-Speed reversing.

26 24 19 00-0017	EA	230 Volt, Full Volt, 1 Speed, Reversing, 7-1/2 HP Combination With Molded Case Circuit	3,715.22	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 24 19 00-0018	EA	230 Volt, Full Volt, 1 Speed, Reversing, 15 HP Combination With Molded Case Circuit	4,959.13	108.21
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*64.92*	
26 24 19 00-0019	EA	230 Volt, Full Volt, 1 Speed, Reversing, 30 HP Combination With Molded Case Circuit	7,119.62	113.36
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*68.01*	
26 24 19 00-0020	EA	230 Volt, Full Volt, 1 Speed, Reversing, 50 HP Combination With Molded Case Circuit	12,473.67	133.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*80.38*	
26 24 19 00-0021	EA	230 Volt, Full Volt, 1 Speed, Reversing, 100 HP Combination With Molded Case Circuit	24,580.57	154.57
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*92.75*	
26 24 19 00-0022	EA	230 Volt, Full Volt, 1 Speed, Reversing, 200 HP Combination With Molded Case Circuit	42,376.66	206.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*123.66*	

26 24 19 00-0023 480 Volt Combination With Molded Case Circuit, Full Volt *(26 24 19 00-0001)*

Note: 1-Speed reversing.

26 24 19 00-0024	EA	480 Volt, Full Volt, 1 Speed, Reversing, 10 HP Combination With Molded Case Circuit	3,715.22	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 24 19 00-0025	EA	480 Volt, Full Volt, 1 Speed, Reversing, 25 HP Combination With Molded Case Circuit	4,959.13	108.21
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*64.92*	
26 24 19 00-0026	EA	480 Volt, Full Volt, 1 Speed, Reversing, 50 HP Combination With Molded Case Circuit	7,119.62	113.36
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*68.01*	
26 24 19 00-0027	EA	480 Volt, Full Volt, 1 Speed, Reversing, 100 HP Combination With Molded Case Circuit	12,473.67	133.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*80.38*	
26 24 19 00-0028	EA	480 Volt, Full Volt, 1 Speed, Reversing, 200 HP Combination With Molded Case Circuit	24,580.57	154.57
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*92.75*	
26 24 19 00-0029	EA	480 Volt, Full Volt, 1 Speed, Reversing, 400 HP Combination With Molded Case Circuit	42,376.66	206.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*123.66*	

26 24 19 00-0030 230 Volt Combination With Molded Case Circuit, Full Volt *(26 24 19 00-0001)*

Note: 2-Speed non-reversing, 2 wind.

26 24 19 00-0031	EA	230 Volt, Full Volt, 2 Speed, 2 Wind Starter, Non-Reverse, 7-1/2 HP Combination With Molded Case Circuit	4,509.73	164.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*98.93*	
26 24 19 00-0032	EA	230 Volt, Full Volt, 2 Speed, 2 Wind Starter, Non-Reverse, 15 HP Combination With Molded Case Circuit	6,216.10	175.19
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*105.11*	
26 24 19 00-0033	EA	230 Volt, Full Volt, 2 Speed, 2 Wind Starter, Non-Reverse, 30 HP Combination With Molded Case Circuit	9,170.80	185.50
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*111.29*	
26 24 19 00-0034	EA	230 Volt, Full Volt, 2 Speed, 2 Wind Starter, Non-Reverse, 50 HP Combination With Molded Case Circuit	16,419.96	211.26
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*126.75*	
26 24 19 00-0035	EA	230 Volt, Full Volt, 2 Speed, 2 Wind Starter, Non-Reverse, 100 HP Combination With Molded Case Circuit	27,228.35	247.33
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*148.40*	

26 24 19 00-0036 480 Volt Combination With Molded Case Circuit, Full Volt *(26 24 19 00-0001)*

Note: 2-Speed non-reversing, 2 wind.

26 24 19 00-0037	EA	480 Volt, Full Volt, 2 Speed, 2 Wind Starter, Non-Reverse, 10 HP Combination With Molded Case Circuit	4,509.73	164.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*98.93*	
26 24 19 00-0038	EA	480 Volt, Full Volt, 2 Speed, 2 Wind Starter, Non-Reverse, 25 HP Combination With Molded Case Circuit	6,216.10	175.19
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*105.11*	
26 24 19 00-0039	EA	480 Volt, Full Volt, 2 Speed, 2 Wind Starter, Non-Reverse, 50 HP Combination With Molded Case Circuit	9,170.80	185.50
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*111.29*	
26 24 19 00-0040	EA	480 Volt, Full Volt, 2 Speed, 2 Wind Starter, Non-Reverse, 100 HP Combination With Molded Case Circuit	16,419.96	211.26
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*126.75*	
26 24 19 00-0041	EA	480 Volt, Full Volt, 2 Speed, 2 Wind Starter, Non-Reverse, 200 HP Combination With Molded Case Circuit	27,228.35	247.33
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*148.40*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 19 00-0042		230 Volt Combination With Molded Case Circuit, Full Volt *(26 24 19 00-0001)*			
		Note: 2-Speed non-reversing, 2 wind.			
26 24 19 00-0043	EA	230 Volt, Full Volt, 2 Speed, 1 Wind Starter, Non-Reverse, 7-1/2 HP Combination With Molded Case Circuit		5,231.42	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*61.83*	
26 24 19 00-0044	EA	230 Volt, Full Volt, 2 Speed, 1 Wind Starter, Non-Reverse, 15 HP Combination With Molded Case Circuit		7,797.39	108.21
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*64.92*	
26 24 19 00-0045	EA	230 Volt, Full Volt, 2 Speed, 1 Wind Starter, Non-Reverse, 30 HP Combination With Molded Case Circuit		10,682.81	113.36
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*68.01*	
26 24 19 00-0046	EA	230 Volt, Full Volt, 2 Speed, 1 Wind Starter, Non-Reverse, 50 HP Combination With Molded Case Circuit		20,089.05	133.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*80.38*	
26 24 19 00-0047	EA	230 Volt, Full Volt, 2 Speed, 1 Wind Starter, Non-Reverse, 100 HP Combination With Molded Case Circuit		34,825.33	154.57
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*92.75*	
26 24 19 00-0048		480 Volt Combination With Molded Case Circuit, Full Volt *(26 24 19 00-0001)*			
		Note: 2-Speed non-reversing, 1 wind.			
26 24 19 00-0049	EA	480 Volt, Full Volt, 2 Speed, 1 Wind Starter, Non-Reverse, 10 HP Combination With Molded Case Circuit		5,231.42	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*61.83*	
26 24 19 00-0050	EA	480 Volt, Full Volt, 2 Speed, 1 Wind Starter, Non-Reverse, 25 HP Combination With Molded Case Circuit		7,797.39	108.21
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*64.92*	
26 24 19 00-0051	EA	480 Volt, Full Volt, 2 Speed, 1 Wind Starter, Non-Reverse, 50 HP Combination With Molded Case Circuit		10,682.81	113.36
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*68.01*	
26 24 19 00-0052	EA	480 Volt, Full Volt, 2 Speed, 1 Wind Starter, Non-Reverse, 100 HP Combination With Molded Case Circuit		20,089.05	133.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*80.38*	
26 24 19 00-0053	EA	480 Volt, Full Volt, 2 Speed, 1 Wind Starter, Non-Reverse, 200 HP Combination With Molded Case Circuit		34,825.33	154.57
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*92.75*	
26 24 19 00-0054		230 Volt Combination With Molded Case Circuit *(26 24 19 00-0001)*			
		Note: Reducing volt, auto-transformer.			
26 24 19 00-0055	EA	230 Volt, Reduced Volt, Auto Transformer, 15 HP Combination With Molded Case Circuit		7,748.24	108.21
26 24 19 00-0056	EA	230 Volt, Reduced Volt, Auto Transformer, 30 HP Combination With Molded Case Circuit		11,875.11	118.51
26 24 19 00-0057	EA	230 Volt, Reduced Volt, Auto Transformer, 50 HP Combination With Molded Case Circuit		20,032.53	133.97
26 24 19 00-0058	EA	230 Volt, Reduced Volt, Auto Transformer, 100 HP Combination With Molded Case Circuit		31,001.67	154.57
26 24 19 00-0059	EA	230 Volt, Reduced Volt, Auto Transformer, 200 HP Combination With Molded Case Circuit		53,051.46	206.10
26 24 19 00-0060		480 Volt Combination With Molded Case Circuit *(26 24 19 00-0001)*			
		Note: Reducing volt, auto-transformer.			
26 24 19 00-0061	EA	480 Volt, Reduced Volt, Auto Transformer, 25 HP Combination With Molded Case Circuit		7,748.24	108.21
26 24 19 00-0062	EA	480 Volt, Reduced Volt, Auto Transformer, 50 HP Combination With Molded Case Circuit		11,875.11	118.51
26 24 19 00-0063	EA	480 Volt, Reduced Volt, Auto Transformer, 100 HP Combination With Molded Case Circuit		20,032.53	133.97
26 24 19 00-0064	EA	480 Volt, Reduced Volt, Auto Transformer, 200 HP Combination With Molded Case Circuit		31,001.67	154.57
26 24 19 00-0065	EA	480 Volt, Reduced Volt, Auto Transformer, 400 HP Combination With Molded Case Circuit		53,051.46	206.10
26 24 19 00-0066		230 Volt Combination With Molded Case Circuit *(26 24 19 00-0001)*			
		Note: Reducing volt, part winding.			
26 24 19 00-0067	EA	230 Volt, Reduced Volt, Part Winding Starters, 10 HP Combination With Molded Case Circuit		5,269.06	164.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*98.93*	
26 24 19 00-0068	EA	230 Volt, Reduced Volt, Part Winding Starters, 25 HP Combination With Molded Case Circuit		6,812.21	190.64
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*114.38*	
26 24 19 00-0069	EA	230 Volt, Reduced Volt, Part Winding Starters, 50 HP Combination With Molded Case Circuit		12,008.98	211.26
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*126.75*	
26 24 19 00-0070	EA	230 Volt, Reduced Volt, Part Winding Starters, 75 HP Combination With Molded Case Circuit		20,493.65	257.62
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*154.58*	
26 24 19 00-0071	EA	230 Volt, Reduced Volt, Part Winding Starters, 150 HP Combination With Molded Case Circuit		28,159.94	329.76
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*197.87*	
26 24 19 00-0072		480 Volt Combination With Molded Case Circuit *(26 24 19 00-0001)*			
		Note: Reducing volt, part winding.			
26 24 19 00-0073	EA	480 Volt, Reduced Volt, Part Winding Starters, 15 HP Combination With Molded Case Circuit		5,269.06	164.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*98.93*	
26 24 19 00-0074	EA	480 Volt, Reduced Volt, Part Winding Starters, 40 HP Combination With Molded Case Circuit		6,812.21	190.64
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*114.38*	
26 24 19 00-0075	EA	480 Volt, Reduced Volt, Part Winding Starters, 75 HP Combination With Molded Case Circuit		12,008.98	211.26
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*126.75*	
26 24 19 00-0076	EA	480 Volt, Reduced Volt, Part Winding Starters, 150 HP Combination With Molded Case Circuit		20,493.65	257.62
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*154.58*	
26 24 19 00-0077	EA	480 Volt, Reduced Volt, Part Winding Starters, 350 HP Combination With Molded Case Circuit		28,159.94	329.76
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*197.87*	
26 24 19 00-0078		230 Volt Combination With Molded Case Circuit *(26 24 19 00-0001)*			
		Note: Reducing volt, energy saver.			
26 24 19 00-0079	EA	230 Volt, Energy Saver Solid State Reduced Volt Starter With MCP, 7-1/2 HP Combination With Molded Case Circuit		21,907.50	133.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add		*80.38*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 19 00-0080	EA	230 Volt, Energy Saver Solid State Reduced Volt Starter With MCP, 15 HP Combination With Molded Case Circuit	23,234.87	164.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*98.93*	
26 24 19 00-0081	EA	230 Volt, Energy Saver Solid State Reduced Volt Starter With MCP, 30 HP Combination With Molded Case Circuit	25,655.30	190.64
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*114.38*	
26 24 19 00-0082	EA	230 Volt, Energy Saver Solid State Reduced Volt Starter With MCP, 50 HP Combination With Molded Case Circuit	38,863.09	211.26
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*126.75*	
26 24 19 00-0083	EA	230 Volt, Energy Saver Solid State Reduced Volt Starter With MCP, 100 HP Combination With Molded Case Circuit	53,009.53	257.62
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*154.58*	
26 24 19 00-0084	EA	230 Volt, Energy Saver Solid State Reduced Volt Starter With MCP, 200 HP Combination With Molded Case Circuit	71,942.85	329.76
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*197.87*	

26 24 19 00-0085 480 Volt Combination With Molded Case Circuit *(26 24 19 00-0001)*

Note: Reducing volt, energy saver.

26 24 19 00-0086	EA	480 Volt, Energy Saver Solid State Reduced Volt Starter With MCP, 10 HP Combination With Molded Case Circuit	21,907.50	133.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*80.38*	
26 24 19 00-0087	EA	480 Volt, Energy Saver Solid State Reduced Volt Starter With MCP, 25 HP Combination With Molded Case Circuit	23,234.87	164.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*98.93*	
26 24 19 00-0088	EA	480 Volt, Energy Saver Solid State Reduced Volt Starter With MCP, 50 HP Combination With Molded Case Circuit	25,655.30	190.64
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*114.38*	
26 24 19 00-0089	EA	480 Volt, Energy Saver Solid State Reduced Volt Starter With MCP, 100 HP Combination With Molded Case Circuit	38,863.09	211.26
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*126.75*	
26 24 19 00-0090	EA	480 Volt, Energy Saver Solid State Reduced Volt Starter With MCP, 200 HP Combination With Molded Case Circuit	53,009.53	257.62
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*154.58*	
26 24 19 00-0091	EA	480 Volt, Energy Saver Solid State Reduced Volt Starter With MCP, 400 HP Combination With Molded Case Circuit	71,942.85	329.76
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*197.87*	

26 24 19 00-0092 Combination Starters With Current Limiting Circuit Breakers *(26 24 19)*

Note: Includes NEMA I enclosure of indoor installation, vertical free standing floor mounted sections (90" high x 20" wide x 16" to 20" deep), fully factory assembled and wired internally.

26 24 19 00-0093 230 Volt Combination Starters With Current Limiting Circuit *(26 24 19 00-0092)*

Note: Full volt, 1-speed non-reversing.

26 24 19 00-0094	EA	230 Volt, Full Volt, 1 Speed, Non-Reversing, 7-1/2 HP Combination Starters With Current Limiting Circuit	3,427.71	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 24 19 00-0095	EA	230 Volt, Full Volt, 1 Speed, Non-Reversing, 15 HP Combination Starters With Current Limiting Circuit	3,902.46	108.21
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*64.92*	
26 24 19 00-0096	EA	230 Volt, Full Volt, 1 Speed, Non-Reversing, 30 HP Combination Starters With Current Limiting Circuit	6,048.21	113.36
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*68.01*	
26 24 19 00-0097	EA	230 Volt, Full Volt, 1 Speed, Non-Reversing, 50 HP Combination Starters With Current Limiting Circuit	11,163.89	133.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*80.38*	
26 24 19 00-0098	EA	230 Volt, Full Volt, 1 Speed, Non-Reversing, 100 HP Combination Starters With Current Limiting Circuit	20,007.41	154.57
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*92.75*	
26 24 19 00-0099	EA	230 Volt, Full Volt, 1 Speed, Non-Reversing, 200 HP Combination Starters With Current Limiting Circuit	32,623.37	206.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*123.66*	

26 24 19 00-0100 480 Volt Combination Starters With Current Limiting Circuit *(26 24 19 00-0092)*

Note: Full volt, 1-speed non-reversing.

26 24 19 00-0101	EA	480 Volt, Full Volt, 1 Speed, Non-Reversing, 10 HP Combination Starters With Current Limiting Circuit	3,427.71	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 24 19 00-0102	EA	480 Volt, Full Volt, 1 Speed, Non-Reversing, 25 HP Combination Starters With Current Limiting Circuit	3,902.46	108.21
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*64.92*	
26 24 19 00-0103	EA	480 Volt, Full Volt, 1 Speed, Non-Reversing, 50 HP Combination Starters With Current Limiting Circuit	6,048.21	113.36
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*68.01*	
26 24 19 00-0104	EA	480 Volt, Full Volt, 1 Speed, Non-Reversing, 100 HP Combination Starters With Current Limiting Circuit	11,163.89	133.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*80.38*	
26 24 19 00-0105	EA	480 Volt, Full Volt, 1 Speed, Non-Reversing, 200 HP Combination Starters With Current Limiting Circuit	20,007.41	154.57
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*92.75*	
26 24 19 00-0106	EA	480 Volt, Full Volt, 1 Speed, Non-Reversing, 400 HP Combination Starters With Current Limiting Circuit	32,623.37	206.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*123.66*	

26 24 19 00-0107 230 Volt Combination Starters With Current Limiting Circuit *(26 24 19 00-0092)*

Note: Full volt, 1-speed reversing.

26 24 19 00-0108	EA	230 Volt, Full Volt, 1 Speed, Reversing, 7-1/2 HP Combination Starters With Current Limiting Circuit	4,580.21	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 24 19 00-0109	EA	230 Volt, Full Volt, 1 Speed, Reversing, 15 HP Combination Starters With Current Limiting Circuit	5,814.29	108.21
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*64.92*	
26 24 19 00-0110	EA	230 Volt, Full Volt, 1 Speed, Reversing, 30 HP Combination Starters With Current Limiting Circuit	8,611.25	113.36
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*68.01*	
26 24 19 00-0111	EA	230 Volt, Full Volt, 1 Speed, Reversing, 50 HP Combination Starters With Current Limiting Circuit	15,380.74	133.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*80.38*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 19 00-0112	EA	230 Volt, Full Volt, 1 Speed, Reversing, 100 HP Combination Starters With Current Limiting Circuit	27,937.33	154.57
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*92.75*	
26 24 19 00-0113		**480 Volt Combination Starters With Current Limiting Circuit** *(26 24 19 00-0092)*		
		Note: Full volt, 1-speed reversing.		
26 24 19 00-0114	EA	480 Volt, Full Volt, 1 Speed, Reversing, 10 HP Combination Starters With Current Limiting Circuit	4,580.21	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 24 19 00-0115	EA	480 Volt, Full Volt, 1 Speed, Reversing, 25 HP Combination Starters With Current Limiting Circuit	5,814.29	108.21
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*64.92*	
26 24 19 00-0116	EA	480 Volt, Full Volt, 1 Speed, Reversing, 50 HP Combination Starters With Current Limiting Circuit	8,611.25	113.36
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*68.01*	
26 24 19 00-0117	EA	480 Volt, Full Volt, 1 Speed, Reversing, 100 HP Combination Starters With Current Limiting Circuit	15,380.74	133.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*80.38*	
26 24 19 00-0118	EA	480 Volt, Full Volt, 1 Speed, Reversing, 200 HP Combination Starters With Current Limiting Circuit	27,937.33	154.57
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*92.75*	
26 24 19 00-0119		**230 Volt Combination Starters With Current Limiting Circuit** *(26 24 19 00-0092)*		
		Note: Full volt, 2-speed non-reversing, 2 wind.		
26 24 19 00-0120	EA	230 Volt, Full Volt, 2 Speed, 2 Wind Starter, Non-Reverse, 7-1/2 HP Combination Starters With Current Limiting Circuit	5,359.98	164.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*98.93*	
26 24 19 00-0121	EA	230 Volt, Full Volt, 2 Speed, 2 Wind Starter, Non-Reverse, 15 HP Combination Starters With Current Limiting Circuit	7,054.07	175.19
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*105.11*	
26 24 19 00-0122	EA	230 Volt, Full Volt, 2 Speed, 2 Wind Starter, Non-Reverse, 30 HP Combination Starters With Current Limiting Circuit	10,637.85	185.50
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*111.29*	
26 24 19 00-0123	EA	230 Volt, Full Volt, 2 Speed, 2 Wind Starter, Non-Reverse, 50 HP Combination Starters With Current Limiting Circuit	19,292.62	211.26
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*126.75*	
26 24 19 00-0124	EA	230 Volt, Full Volt, 2 Speed, 2 Wind Starter, Non-Reverse, 100 HP Combination Starters With Current Limiting Circuit	30,558.09	247.33
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*148.40*	
26 24 19 00-0125		**480 Volt Combination Starters With Current Limiting Circuit** *(26 24 19 00-0092)*		
		Note: Full volt, 2-speed non-reversing, 2 wind.		
26 24 19 00-0126	EA	480 Volt, Full Volt, 2 Speed, 2 Wind Starter, Non-Reverse, 10 HP Combination Starters With Current Limiting Circuit	5,359.98	164.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*98.93*	
26 24 19 00-0127	EA	480 Volt, Full Volt, 2 Speed, 2 Wind Starter, Non-Reverse, 25 HP Combination Starters With Current Limiting Circuit	7,054.07	175.19
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*105.11*	
26 24 19 00-0128	EA	480 Volt, Full Volt, 2 Speed, 2 Wind Starter, Non-Reverse, 50 HP Combination Starters With Current Limiting Circuit	10,637.85	185.50
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*111.29*	
26 24 19 00-0129	EA	480 Volt, Full Volt, 2 Speed, 2 Wind Starter, Non-Reverse, 100 HP Combination Starters With Current Limiting Circuit	19,292.62	211.26
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*126.75*	
26 24 19 00-0130	EA	480 Volt, Full Volt, 2 Speed, 2 Wind Starter, Non-Reverse, 200 HP Combination Starters With Current Limiting Circuit	30,558.09	247.33
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*148.40*	
26 24 19 00-0131		**230 Volt Combination Starters With Current Limiting Circuit** *(26 24 19 00-0092)*		
		Note: Full volt, 2-speed non-reversing, 1 wind.		
26 24 19 00-0132	EA	230 Volt, Full Volt, 2 Speed, 1 Wind Starter, Non-Reverse, 7-1/2 HP Combination Starters With Current Limiting Circuit	6,184.72	154.57
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*92.75*	
26 24 19 00-0133	EA	230 Volt, Full Volt, 2 Speed, 1 Wind Starter, Non-Reverse, 15 HP Combination Starters With Current Limiting Circuit	8,733.94	164.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*98.93*	
26 24 19 00-0134	EA	230 Volt, Full Volt, 2 Speed, 1 Wind Starter, Non-Reverse, 30 HP Combination Starters With Current Limiting Circuit	12,266.14	175.19
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*105.11*	
26 24 19 00-0135	EA	230 Volt, Full Volt, 2 Speed, 1 Wind Starter, Non-Reverse, 50 HP Combination Starters With Current Limiting Circuit	23,061.27	200.95
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*120.57*	
26 24 19 00-0136	EA	230 Volt, Full Volt, 2 Speed, 1 Wind Starter, Non-Reverse, 100 HP Combination Starters With Current Limiting Circuit	38,253.62	237.02
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*142.22*	
26 24 19 00-0137		**480 Volt Combination Starters With Current Limiting Circuit** *(26 24 19 00-0092)*		
		Note: Full volt, 2-speed non-reversing, 1 wind.		
26 24 19 00-0138	EA	480 Volt, Full Volt, 2 Speed, 1 Wind Starter, Non-Reverse, 10 HP Combination Starters With Current Limiting Circuit	6,184.72	154.57
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*92.75*	
26 24 19 00-0139	EA	480 Volt, Full Volt, 2 Speed, 1 Wind Starter, Non-Reverse, 25 HP Combination Starters With Current Limiting Circuit	8,733.94	164.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*98.93*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 19 00-0140	EA	480 Volt, Full Volt, 2 Speed, 1 Wind Starter, Non-Reverse, 50 HP Combination Starters With Current Limiting Circuit	12,266.14	175.19
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*105.11*	
26 24 19 00-0141	EA	480 Volt, Full Volt, 2 Speed, 1 Wind Starter, Non-Reverse, 100 HP Combination Starters With Current Limiting Circuit	23,061.27	200.95
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*120.57*	
26 24 19 00-0142	EA	480 Volt, Full Volt, 2 Speed, 1 Wind Starter, Non-Reverse, 200 HP Combination Starters With Current Limiting Circuit	38,253.62	237.02
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*142.22*	
26 24 19 00-0143		**230 Volt Combination Starters With Current Limiting Circuit** *(26 24 19 00-0092)*		
		Note: Reduced volt, auto-transformer.		
26 24 19 00-0144	EA	230 Volt, Reduced Volt, Auto Transformer, 15 HP Combination Starters With Current Limiting Circuit	8,573.91	108.21
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*64.92*	
26 24 19 00-0145	EA	230 Volt, Reduced Volt, Auto Transformer, 30 HP Combination Starters With Current Limiting Circuit	13,821.34	118.51
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*71.11*	
26 24 19 00-0146	EA	230 Volt, Reduced Volt, Auto Transformer, 50 HP Combination Starters With Current Limiting Circuit	23,377.01	133.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*80.38*	
26 24 19 00-0147	EA	230 Volt, Reduced Volt, Auto Transformer, 100 HP Combination Starters With Current Limiting Circuit	35,427.39	154.57
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*92.75*	
26 24 19 00-0148	EA	230 Volt, Reduced Volt, Auto Transformer, 200 HP Combination Starters With Current Limiting Circuit	58,302.86	206.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*123.66*	
26 24 19 00-0149		**480 Volt Combination Starters With Current Limiting Circuit** *(26 24 19 00-0092)*		
		Note: Reduced volt, auto-transformer.		
26 24 19 00-0150	EA	480 Volt, Reduced Volt, Auto Transformer, 25 HP Combination Starters With Current Limiting Circuit	8,573.91	108.21
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*64.92*	
26 24 19 00-0151	EA	480 Volt, Reduced Volt, Auto Transformer, 50 HP Combination Starters With Current Limiting Circuit	13,821.34	118.51
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*71.11*	
26 24 19 00-0152	EA	480 Volt, Reduced Volt, Auto Transformer, 100 HP Combination Starters With Current Limiting Circuit	23,377.01	133.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*80.38*	
26 24 19 00-0153	EA	480 Volt, Reduced Volt, Auto Transformer, 200 HP Combination Starters With Current Limiting Circuit	35,427.39	154.57
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*92.75*	
26 24 19 00-0154	EA	480 Volt, Reduced Volt, Auto Transformer, 400 HP Combination Starters With Current Limiting Circuit	58,302.86	206.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*123.66*	
26 24 19 00-0155		**230 Volt Combination Starters With Current Limiting Circuit** *(26 24 19 00-0092)*		
		Note: Reduced volt, part winding.		
26 24 19 00-0156	EA	230 Volt, Reduced Volt, Part Winding Starters, 10 HP Combination Starters With Current Limiting Circuit	6,119.31	164.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*98.93*	
26 24 19 00-0157	EA	230 Volt, Reduced Volt, Part Winding Starters, 25 HP Combination Starters With Current Limiting Circuit	7,645.26	190.64
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*114.38*	
26 24 19 00-0158	EA	230 Volt, Reduced Volt, Part Winding Starters, 50 HP Combination Starters With Current Limiting Circuit	13,466.20	211.26
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*126.75*	
26 24 19 00-0159	EA	230 Volt, Reduced Volt, Part Winding Starters, 75 HP Combination Starters With Current Limiting Circuit	23,879.90	257.62
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*154.58*	
26 24 19 00-0160	EA	230 Volt, Reduced Volt, Part Winding Starters, 150 HP Combination Starters With Current Limiting Circuit	35,242.07	329.76
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*197.87*	
26 24 19 00-0161		**480 Volt Combination Starters With Current Limiting Circuit** *(26 24 19 00-0092)*		
		Note: Reduced volt, part winding.		
26 24 19 00-0162	EA	480 Volt, Reduced Volt, Part Winding Starters, 15 HP Combination Starters With Current Limiting Circuit	6,119.31	164.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*98.93*	
26 24 19 00-0163	EA	480 Volt, Reduced Volt, Part Winding Starters, 40 HP Combination Starters With Current Limiting Circuit	7,645.26	190.64
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*114.38*	
26 24 19 00-0164	EA	480 Volt, Reduced Volt, Part Winding Starters, 75 HP Combination Starters With Current Limiting Circuit	13,466.20	211.26
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*126.75*	
26 24 19 00-0165	EA	480 Volt, Reduced Volt, Part Winding Starters, 150 HP Combination Starters With Current Limiting Circuit	23,879.90	257.62
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*154.58*	
26 24 19 00-0166	EA	480 Volt, Reduced Volt, Part Winding Starters, 350 HP Combination Starters With Current Limiting Circuit	35,242.07	329.76
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*197.87*	
26 24 19 00-0167		**230 Volt Combination Starters With Current Limiting Circuit** *(26 24 19 00-0092)*		
		Note: Reduced volt, energy saving		
26 24 19 00-0168	EA	230 Volt, Energy Saver Solid State Reduced Volt Starter With MCP, 7.5 HP Combination Starters With Current Limiting Circuit	22,612.77	133.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*80.38*	
26 24 19 00-0169	EA	230 Volt, Energy Saver Solid State Reduced Volt Starter With MCP, 15 HP Combination Starters With Current Limiting Circuit	23,932.76	164.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*98.93*	
26 24 19 00-0170	EA	230 Volt, Energy Saver Solid State Reduced Volt Starter With MCP, 30 HP Combination Starters With Current Limiting Circuit	26,328.62	190.64
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*114.38*	
26 24 19 00-0171	EA	230 Volt, Energy Saver Solid State Reduced Volt Starter With MCP, 50 HP Combination Starters With Current Limiting Circuit	39,420.91	211.26
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*126.75*	
26 24 19 00-0172	EA	230 Volt, Energy Saver Solid State Reduced Volt Starter With MCP, 100 HP Combination Starters With Current Limiting Circuit	53,442.03	257.62
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*154.58*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 19 00-0173	EA	230 Volt, Energy Saver Solid State Reduced Volt Starter With MCP, 200 HP Combination Starters With Current Limiting Circuit	74,908.89	329.76
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*197.87*	

26 24 19 00-0174 480 Volt Combination Starters With Current Limiting Circuit *(26 24 19 00-0092)*

Note: Reduced volt, energy saving

26 24 19 00-0175	EA	480 Volt, Energy Saver Solid State Reduced Volt Starter With MCP, 10 HP Combination Starters With Current Limiting Circuit	22,612.82	133.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*80.39*	
26 24 19 00-0176	EA	480 Volt, Energy Saver Solid State Reduced Volt Starter With MCP, 25 HP Combination Starters With Current Limiting Circuit	23,932.76	164.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*98.93*	
26 24 19 00-0177	EA	480 Volt, Energy Saver Solid State Reduced Volt Starter With MCP, 50 HP Combination Starters With Current Limiting Circuit	26,328.62	190.64
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*114.38*	
26 24 19 00-0178	EA	480 Volt, Energy Saver Solid State Reduced Volt Starter With MCP, 100 HP Combination Starters With Current Limiting Circuit	39,420.91	211.26
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*126.75*	
26 24 19 00-0179	EA	480 Volt, Energy Saver Solid State Reduced Volt Starter With MCP, 200 HP Combination Starters With Current Limiting Circuit	53,442.03	257.62
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*154.58*	
26 24 19 00-0180	EA	480 Volt, Energy Saver Solid State Reduced Volt Starter With MCP, 400 HP Combination Starters With Current Limiting Circuit	74,908.89	329.76
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*197.87*	

26 24 19 00-0181 Combination Starters With Fusible Switch *(26 24 19)*

Note: Includes NEMA I enclosure of indoor installation, vertical free standing floor mounted sections (90" high x 20" wide x 16" to 20" deep), fully factory assembled and Wired Internally.

26 24 19 00-0182 230 Volt Combination Starters With Fusible Switch, Full Volt *(26 24 19 00-0181)*

Note: 1-Speed non-reversing.

26 24 19 00-0183	EA	7-1/2 HP, 230 Volt, Combination Starters With Fusible Switch, Full Volt, 1 Speed Non-Reversing	2,270.29	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 24 19 00-0184	EA	15 HP, 230 Volt, Combination Starters With Fusible Switch, Full Volt, 1 Speed Non-Reversing	3,140.68	108.21
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*64.92*	
26 24 19 00-0185	EA	30 HP, 230 Volt, Combination Starters With Fusible Switch, Full Volt, 1 Speed Non-Reversing	5,313.46	113.36
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*68.01*	
26 24 19 00-0186	EA	50 HP, 230 Volt, Combination Starters With Fusible Switch, Full Volt, 1 Speed Non-Reversing	9,389.68	133.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*80.38*	
26 24 19 00-0187	EA	100 HP, 230 Volt, Combination Starters With Fusible Switch, Full Volt, 1 Speed Non-Reversing	15,259.78	154.57
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*92.75*	
26 24 19 00-0188	EA	200 HP, 230 Volt, Combination Starters With Fusible Switch, Full Volt, 1 Speed Non-Reversing	27,236.83	206.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*123.66*	

26 24 19 00-0189 480 Volt Combination Starters With Fusible Switch, Full Volt *(26 24 19 00-0181)*

Note: 1-Speed non-reversing.

26 24 19 00-0190	EA	10 HP, 480 Volt, Combination Starters With Fusible Switch, Full Volt, 1 Speed Non-Reversing	2,270.29	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 24 19 00-0191	EA	25 HP, 480 Volt, Combination Starters With Fusible Switch, Full Volt, 1 Speed Non-Reversing	3,140.68	108.21
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*64.92*	
26 24 19 00-0192	EA	50 HP, 480 Volt, Combination Starters With Fusible Switch, Full Volt, 1 Speed Non-Reversing	5,313.46	113.36
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*68.01*	
26 24 19 00-0193	EA	100 HP, 480 Volt, Combination Starters With Fusible Switch, Full Volt, 1 Speed Non-Reversing	9,389.68	133.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*80.38*	
26 24 19 00-0194	EA	200 HP, 480 Volt, Combination Starters With Fusible Switch, Full Volt, 1 Speed Non-Reversing	15,259.78	154.57
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*92.75*	
26 24 19 00-0195	EA	400 HP, 480 Volt, Combination Starters With Fusible Switch, Full Volt, 1 Speed Non-Reversing	27,236.83	206.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*123.66*	

26 24 19 00-0196 230 Volt Combination Starters With Fusible Switch, Full Volt *(26 24 19 00-0181)*

Note: 1-Speed reversing.

26 24 19 00-0197	EA	7-1/2 HP, 230 Volt, Combination Starters With Fusible Switch, Full Volt, 1 Speed Reversing	3,683.27	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 24 19 00-0198	EA	15 HP, 230 Volt, Combination Starters With Fusible Switch, Full Volt, 1 Speed Reversing	5,499.75	108.21
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*64.92*	
26 24 19 00-0199	EA	30 HP, 230 Volt, Combination Starters With Fusible Switch, Full Volt, 1 Speed Reversing	8,815.21	113.36
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*68.01*	
26 24 19 00-0200	EA	50 HP, 230 Volt, Combination Starters With Fusible Switch, Full Volt, 1 Speed Reversing	14,380.59	133.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*80.38*	
26 24 19 00-0201	EA	100 HP, 230 Volt, Combination Starters With Fusible Switch, Full Volt, 1 Speed Reversing	22,137.95	154.57
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*92.75*	
26 24 19 00-0202	EA	200 HP, 230 Volt, Combination Starters With Fusible Switch, Full Volt, 1 Speed Reversing	37,646.23	206.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*123.66*	

26 24 19 00-0203 480 Volt Combination Starters With Fusible Switch, Full Volt *(26 24 19 00-0181)*

Note: 1-Speed reversing.

26 24 19 00-0204	EA	10 HP, 480 Volt, Combination Starters With Fusible Switch, Full Volt, 1 Speed Reversing	3,683.27	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 19 00-0205	EA	25 HP, 480 Volt, Combination Starters With Fusible Switch, Full Volt, 1 Speed Reversing	5,499.75	108.21
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*64.92*	
26 24 19 00-0206	EA	50 HP, 480 Volt, Combination Starters With Fusible Switch, Full Volt, 1 Speed Reversing	8,815.21	113.36
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*68.01*	
26 24 19 00-0207	EA	100 HP, 480 Volt, Combination Starters With Fusible Switch, Full Volt, 1 Speed Reversing	14,380.59	133.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*80.38*	
26 24 19 00-0208	EA	200 HP, 480 Volt, Combination Starters With Fusible Switch, Full Volt, 1 Speed Reversing	22,137.95	154.57
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*92.75*	
26 24 19 00-0209	EA	400 HP, 480 Volt, Combination Starters With Fusible Switch, Full Volt, 1 Speed Reversing	37,646.23	206.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*123.66*	
26 24 19 00-0210		**230 Volt Combination Starters With Fusible Switch, Full Volt** *(26 24 19 00-0181)*		
		Note: 2-Speed non-reversing, 2 wind.		
26 24 19 00-0211	EA	10 HP, 230 Volt, Combination Starters With Fusible Switch, Full Volt, 2 Speed Non-Reversing, 2 Wind Starter	4,303.31	164.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*98.93*	
26 24 19 00-0212	EA	15 HP, 230 Volt, Combination Starters With Fusible Switch, Full Volt, 2 Speed Non-Reversing, 2 Wind Starter	5,931.05	175.19
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*105.11*	
26 24 19 00-0213	EA	30 HP, 230 Volt, Combination Starters With Fusible Switch, Full Volt, 2 Speed Non-Reversing, 2 Wind Starter	9,355.10	185.50
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*111.29*	
26 24 19 00-0214	EA	50 HP, 230 Volt, Combination Starters With Fusible Switch, Full Volt, 2 Speed Non-Reversing, 2 Wind Starter	16,739.42	211.26
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*126.75*	
26 24 19 00-0215	EA	100 HP, 230 Volt, Combination Starters With Fusible Switch, Full Volt, 2 Speed Non-Reversing, 2 Wind Starter	26,690.19	247.33
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*148.40*	
26 24 19 00-0216		**480 Volt Combination Starters With Fusible Switch, Full Volt** *(26 24 19 00-0181)*		
		Note: 2-Speed non-reversing, 2 wind.		
26 24 19 00-0217	EA	10 HP, 480 Volt, Combination Starters With Fusible Switch, Full Volt, 2 Speed Non-Reversing, 2 Wind Starter	4,303.31	164.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*98.93*	
26 24 19 00-0218	EA	25 HP, 480 Volt, Combination Starters With Fusible Switch, Full Volt, 2 Speed Non-Reversing, 2 Wind Starter	5,931.05	175.19
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*105.11*	
26 24 19 00-0219	EA	50 HP, 480 Volt, Combination Starters With Fusible Switch, Full Volt, 2 Speed Non-Reversing, 2 Wind Starter	9,355.10	185.50
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*111.29*	
26 24 19 00-0220	EA	100 HP, 480 Volt, Combination Starters With Fusible Switch, Full Volt, 2 Speed Non-Reversing, 2 Wind Starter	16,739.42	211.26
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*126.75*	
26 24 19 00-0221	EA	200 HP, 480 Volt, Combination Starters With Fusible Switch, Full Volt, 2 Speed Non-Reversing, 2 Wind Starter	26,690.19	247.33
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*148.40*	
26 24 19 00-0222		**230 Volt Combination Starters With Fusible Switch, Full Volt** *(26 24 19 00-0181)*		
		Note: 2-Speed non-reversing, 1 wind.		
26 24 19 00-0223	EA	7-1/2 HP, 230 Volt, Combination Starters With Fusible Switch, Full Volt, 2 Speed Non-Reversing, 1 Wind Starter	4,931.62	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 24 19 00-0224	EA	15 HP, 230 Volt, Combination Starters With Fusible Switch, Full Volt, 2 Speed Non-Reversing, 1 Wind Starter	7,531.99	108.21
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*64.92*	
26 24 19 00-0225	EA	30 HP, 230 Volt, Combination Starters With Fusible Switch, Full Volt, 2 Speed Non-Reversing, 1 Wind Starter	10,854.82	113.36
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*68.01*	
26 24 19 00-0226	EA	50 HP, 230 Volt, Combination Starters With Fusible Switch, Full Volt, 2 Speed Non-Reversing, 1 Wind Starter	21,902.59	133.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*80.38*	
26 24 19 00-0227		**480 Volt Combination Starters With Fusible Switch, Full Volt** *(26 24 19 00-0181)*		
		Note: 2-Speed non-reversing, 1 wind.		
26 24 19 00-0228	EA	10 HP, 480 Volt, Combination Starters With Fusible Switch, Full Volt, 2 Speed Non-Reversing, 1 Wind Starter	4,931.62	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 24 19 00-0229	EA	25 HP, 480 Volt, Combination Starters With Fusible Switch, Full Volt, 2 Speed Non-Reversing, 1 Wind Starter	7,531.99	108.21
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*64.92*	
26 24 19 00-0230	EA	50 HP, 480 Volt, Combination Starters With Fusible Switch, Full Volt, 2 Speed Non-Reversing, 1 Wind Starter	10,854.82	113.36
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*68.01*	
26 24 19 00-0231	EA	100 HP, 480 Volt, Combination Starters With Fusible Switch, Full Volt, 2 Speed Non-Reversing, 1 Wind Starter	21,902.59	133.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*80.38*	
26 24 19 00-0232		**230 Volt Combination Starters With Fusible Switch, Reduced Volt** *(26 24 19 00-0181)*		
		Note: Auto-transformer.		
26 24 19 00-0233	EA	15 HP, 230 Volt, Combination Starters With Fusible Switch, Reduced Volt, Auto-Transformer	7,480.39	108.21
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*64.92*	
26 24 19 00-0234	EA	30 HP, 230 Volt, Combination Starters With Fusible Switch, Reduced Volt, Auto-Transformer	13,224.20	118.51
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*71.11*	
26 24 19 00-0235	EA	50 HP, 230 Volt, Combination Starters With Fusible Switch, Reduced Volt, Auto-Transformer	22,047.57	133.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*80.38*	
26 24 19 00-0236	EA	100 HP, 230 Volt, Combination Starters With Fusible Switch, Reduced Volt, Auto-Transformer	29,443.70	154.57
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*92.75*	
26 24 19 00-0237	EA	200 HP, 230 Volt, Combination Starters With Fusible Switch, Reduced Volt, Auto-Transformer	49,478.45	206.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*123.66*	
26 24 19 00-0238		**480 Volt Combination Starters With Fusible Switch, Reduced Volt** *(26 24 19 00-0181)*		
		Note: Auto-transformer.		
26 24 19 00-0239	EA	25 HP, 480 Volt, Combination Starters With Fusible Switch, Reduced Volt, Auto-Transformer	7,480.39	108.21
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*64.92*	
26 24 19 00-0240	EA	50 HP, 480 Volt, Combination Starters With Fusible Switch, Reduced Volt, Auto-Transformer	13,224.20	118.51
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*71.11*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 19 00-0241	EA	100 HP, 480 Volt, Combination Starters With Fusible Switch, Reduced Volt, Auto-Transformer	22,047.57	133.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*80.38*	
26 24 19 00-0242	EA	200 HP, 480 Volt, Combination Starters With Fusible Switch, Reduced Volt, Auto-Transformer	29,443.70	154.57
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*92.75*	
26 24 19 00-0243	EA	400 HP, 480 Volt, Combination Starters With Fusible Switch, Reduced Volt, Auto-Transformer	49,478.45	206.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*123.66*	
26 24 19 00-0244		**230 Volt Combination Starters With Fusible Switch, Reduced Volt** *(26 24 19 00-0181)*		
		Note: Part winding.		
26 24 19 00-0245	EA	10 HP, 230 Volt, Combination Starters With Fusible Switch, Reduced Volt, Part Winding Starters	5,301.00	164.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*98.93*	
26 24 19 00-0246	EA	25 HP, 230 Volt, Combination Starters With Fusible Switch, Reduced Volt, Part Winding Starters	7,023.54	190.64
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*114.38*	
26 24 19 00-0247	EA	50 HP, 230 Volt, Combination Starters With Fusible Switch, Reduced Volt, Part Winding Starters	11,202.97	211.26
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*126.75*	
26 24 19 00-0248	EA	75 HP, 230 Volt, Combination Starters With Fusible Switch, Reduced Volt, Part Winding Starters	22,368.62	257.62
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*154.58*	
26 24 19 00-0249		**480 Volt Combination Starters With Fusible Switch, Reduced Volt** *(26 24 19 00-0181)*		
		Note: Part winding.		
26 24 19 00-0250	EA	15 HP, 480 Volt, Combination Starters With Fusible Switch, Reduced Volt, Part Winding Starters	5,301.00	164.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*98.93*	
26 24 19 00-0251	EA	40 HP, 480 Volt, Combination Starters With Fusible Switch, Reduced Volt, Part Winding Starters	7,023.54	190.64
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*114.38*	
26 24 19 00-0252	EA	75 HP, 480 Volt, Combination Starters With Fusible Switch, Reduced Volt, Part Winding Starters	11,202.97	211.26
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*126.75*	
26 24 19 00-0253	EA	150 HP, 480 Volt, Combination Starters With Fusible Switch, Reduced Volt, Part Winding Starters	22,368.62	257.62
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*154.58*	
26 24 19 00-0254		**230 Volt Combination Starters With Fusible Switch, Reduced Volt** *(26 24 19 00-0181)*		
		Note: Energy saver.		
26 24 19 00-0255	EA	7.5 HP, 230 Volt, Combination Starters With Fusible Switch, Reduced Volt, Energy Saver Solid State Starter With MCP	21,905.04	133.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*80.38*	
26 24 19 00-0256	EA	15 HP, 230 Volt, Combination Starters With Fusible Switch, Reduced Volt, Energy Saver Solid State Starter With MCP	23,234.87	164.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*98.93*	
26 24 19 00-0257	EA	30 HP, 230 Volt, Combination Starters With Fusible Switch, Reduced Volt, Energy Saver Solid State Starter With MCP	25,655.30	190.64
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*114.38*	
26 24 19 00-0258	EA	50 HP, 230 Volt, Combination Starters With Fusible Switch, Reduced Volt, Energy Saver Solid State Starter With MCP	38,863.09	211.26
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*126.75*	
26 24 19 00-0259	EA	100 HP, 230 Volt, Combination Starters With Fusible Switch, Reduced Volt, Energy Saver Solid State Starter With MCP	53,009.53	257.62
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*154.58*	
26 24 19 00-0260	EA	200 HP, 230 Volt, Combination Starters With Fusible Switch, Reduced Volt, Energy Saver Solid State Starter With MCP	71,942.85	329.76
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*197.87*	
26 24 19 00-0261		**480 Volt Combination Starters With Fusible Switch, Reduced Volt** *(26 24 19 00-0181)*		
		Note: Energy saver.		
26 24 19 00-0262	EA	10 HP, 480 Volt, Combination Starters With Fusible Switch, Reduced Volt, Energy Saver Solid State Starter With MCP	21,905.04	133.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*80.38*	
26 24 19 00-0263	EA	25 HP, 480 Volt, Combination Starters With Fusible Switch, Reduced Volt, Energy Saver Solid State Starter With MCP	23,234.87	164.88
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*98.93*	
26 24 19 00-0264	EA	50 HP, 480 Volt, Combination Starters With Fusible Switch, Reduced Volt, Energy Saver Solid State Starter With MCP	25,655.30	190.64
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*114.38*	
26 24 19 00-0265	EA	100 HP, 480 Volt, Combination Starters With Fusible Switch, Reduced Volt, Energy Saver Solid State Starter With MCP	38,863.09	211.26
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*126.75*	
26 24 19 00-0266	EA	200 HP, 480 Volt, Combination Starters With Fusible Switch, Reduced Volt, Energy Saver Solid State Starter With MCP	53,009.53	257.62
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*154.58*	
26 24 19 00-0267	EA	400 HP, 480 Volt, Combination Starters With Fusible Switch, Reduced Volt, Energy Saver Solid State Starter With MCP	71,942.85	329.76
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*197.87*	
26 24 19 00-0268		**Starter Accessories** *(26 24 19)*		
		Note: Additional options or accessories for the Combination Starters		
26 24 19 00-0269		**Starter Modifications** *(26 24 19 00-0268)*		
26 24 19 00-0270	EA	Size 1, 2, 50 VA, 60 Hertz, Standard Control Circuit Transformer	199.15	
26 24 19 00-0271	EA	Size 3, 4, 150 VA, 60 Hertz, Standard Control Circuit Transformer	383.35	
26 24 19 00-0272	EA	Size 5, 6, 50 VA, 60 Hertz, Control Circuit Transformer	547.99	
26 24 19 00-0273	EA	Extra 50 VA, 60 Hertz, Control Circuit Transformer, All Sizes	137.61	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 19 00-0274	EA	Extra 100 VA, 60 Hertz, Control Circuit Transformer, All Sizes	194.13	
26 24 19 00-0275	EA	Extra 150 VA, 60 Hertz, Control Circuit Transformer, All Sizes	326.83	
26 24 19 00-0276	EA	Overload Relay Heater Elements, 3 Per Starter	81.09	
26 24 19 00-0277	EA	N.O. Overload Relay Alarm	68.81	
26 24 19 00-0278	EA	Control Circuit Fuses, Primary/Secondary	147.29	
26 24 19 00-0279	EA	Control Devices Type PB2 Mount On Device, 2 Unit Pushbutton	182.10	
26 24 19 00-0280	EA	Control Devices Type PB2 Mount On Device, 3 Unit Pushbutton	356.18	
26 24 19 00-0281	EA	Control Devices Type PB2 Mount On Device, 2 Or 3 Post Select	182.10	
26 24 19 00-0282	EA	Control Devices Type PB2 Mount On Device, Individual Light Full V	208.88	
26 24 19 00-0283	EA	Control Devices Type PB2 Mount On Device, Individual Light Transformer	251.73	
26 24 19 00-0284	EA	Control Devices Type PB2 Mount On Device, Individual Light Push To	297.26	
26 24 19 00-0285	EA	Blank Devices Panel	56.24	
26 24 19 00-0286	EA	Oversize Or Special Color Starter	88.37	
26 24 19 00-0287	EA	Mini Voltmeter/Ammeter With Current Transformer	767.36	
26 24 19 00-0288	EA	Mini Elapsed Time Meters, Non-Resettable	695.06	
26 24 19 00-0289	EA	Panel Elapsed Time Meter, Resettable	1,044.42	
26 24 19 00-0290	EA	Terminal Blocks, Side Mounted, Press Connection, Plug-In Press	88.37	
26 24 19 00-0291	EA	Terminal Blocks, Side Mounted, Press Connection, Plug-In Screw	125.87	
26 24 19 00-0292	EA	Terminal Blocks, Front Mounted, Press Connection, Standard	88.37	
26 24 19 00-0293	EA	Terminal Blocks, Front Mounted, Press Connection, Plug-In	125.87	
26 24 19 00-0294	EA	Terminal Blocks, Front Mounted, Press Connection, Screw-Type Utility	125.87	
26 24 19 00-0295	EA	Terminal Blocks, Front Mounted, Press Connection, Plug-In Screw Type	182.10	
26 24 19 00-0296	EA	MOR - A Solid State Modular Overload Relay	452.58	
26 24 19 00-0297	EA	Heater Module	84.26	
26 24 19 00-0298	EA	LAM - Long Acceleration Module	523.41	
26 24 19 00-0299	EA	JAM - Jam Protection Module	600.00	
26 24 19 00-0300	EA	PUM - Phase Unbalance Module	1,138.73	
26 24 19 00-0301	EA	ULM - Underload Module	546.38	
26 24 19 00-0302	EA	Wiring To Common Control Circuit Transformer	120.00	
26 24 19 00-0303	EA	Handle Operator Separable Source Control Circuit	224.68	
26 24 19 00-0304	EA	Type SIS Control Wire	94.47	
26 24 19 00-0305	EA	Ring Or Spade Terminals Control	120.00	
26 24 19 00-0306	EA	Ring Terminals Power	120.00	
26 24 19 00-0307	EA	14 Gauge Control Wire	94.47	
26 24 19 00-0308	EA	Wiring Diagram On Door	71.49	
26 24 19 00-0309	EA	Special Color Or Type Control Wire	86.81	
26 24 19 00-0310	EA	Current Transformer 12.5 VA	681.70	
26 24 19 00-0311	EA	Ground Fault Relay-Instant Non-Adjust, Size 1 Thru 4	2,177.88	
26 24 19 00-0312	EA	Ground Fault Relay-Instant Non-Adjust, Size 5 Thru 6	2,451.07	

26 24 19 00-0313 Control Relays And Special Components *(26 24 19 00-0268)*

26 24 19 00-0314	EA	600 Volt, 2 Pole, Control Relays	694.73	
26 24 19 00-0315	EA	600 Volt, 4 Pole, Control Relays	815.71	
26 24 19 00-0316	EA	600 Volt, 6 Pole, Control Relays	947.01	
26 24 19 00-0317	EA	600 Volt, 8 Pole, Control Relays	1,049.73	
26 24 19 00-0318	EA	Pneumatic Timer, Control Relays	937.55	
26 24 19 00-0319	EA	Motor Driven Timer, Control Relays	2,443.11	
26 24 19 00-0320	EA	7 Days Time Switch, Control Relays	3,074.99	
26 24 19 00-0321	EA	24 Hour Time Switch, Control Relays	862.28	
26 24 19 00-0322	EA	Phase Voltage, Control Relays	1,466.78	
26 24 19 00-0323	EA	Two Circuit Alternator, Control Relays	2,053.04	
26 24 19 00-0324	EA	Manual 120 Volt, Control Relays	200.74	
26 24 19 00-0325	EA	Over-Current Relay, Control Relays	4,871.50	
26 24 19 00-0326	EA	UV-Relay, Control Relays	4,125.97	
26 24 19 00-0327	EA	Over-Current Relay, Control Relays	4,125.97	
26 24 19 00-0328	EA	Teleductor, Control Relays	1,512.40	
26 24 19 00-0329	EA	Current Transducer, Control Relays	4,067.30	
26 24 19 00-0330	EA	Watt Transducer, Control Relays	8,134.59	
26 24 19 00-0331	EA	Control Relays, Blank, Add For Each 1x	276.02	
26 24 19 00-0332	EA	Control Relays, Fixed Mounted Back Pan, 20" Structure With Wireway	412.89	
26 24 19 00-0333	EA	Control Relays, Fixed Mounted Back Pan, 24" Structure With Wireway	465.36	
26 24 19 00-0334	EA	Control Relays, Fixed Mounted Back Pan, 280" Structure With Wireway	517.82	
26 24 19 00-0335	EA	Control Relays, Fixed Mounted Back Pan, 20" Structure Without Wireway	465.36	
26 24 19 00-0336	EA	Control Relays, Fixed Mounted Back Pan, 24" Structure Without Wireway	517.82	
26 24 19 00-0337	EA	Control Relays, Fixed Mounted Back Pan, 2820" Structure Without Wireway	545.20	

26 24 19 00-0338 Circuit Breaker Modifications/Accessories *(26 24 19 00-0268)*

26 24 19 00-0339	EA	Shunt Trip, Circuit Breaker	778.12	
26 24 19 00-0340	EA	Auxiliary Switch, Circuit Breaker	268.77	
26 24 19 00-0341	EA	Key Interlock, Circuit Breaker	966.69	
26 24 19 00-0342	EA	GFR Ground Fault, Circuit Breaker	4,456.32	
26 24 19 00-0343	EA	Seltronic Breaker, Circuit Breaker	2,581.46	

26 24 19 00-0344 Incoming Line And Feeder Circuit Breakers *(26 24 19 00-0268)*

26 24 19 00-0345	EA	Incoming Line And Feeder Circuit Breaker, Standard Mold, Type A, B, 100	1,853.24	66.98
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*40.19*	
26 24 19 00-0346	EA	Incoming Line And Feeder Circuit Breaker, Standard Mold, Type A, B, 150	3,218.86	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 19 00-0347	EA	Incoming Line And Feeder Circuit Breaker, Standard Mold, Type A, B, 100/100	3,125.29	66.98
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*40.19*	
26 24 19 00-0348	EA	Incoming Line And Feeder Circuit Breaker, Standard Mold, Type A, B, 100/150	4,488.24	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 24 19 00-0349	EA	Incoming Line And Feeder Circuit Breaker, Standard Mold, Type A, B, 150/150	5,784.39	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 24 19 00-0350	EA	Incoming Line And Feeder Circuit Breaker, Standard Mold, Type A, B, 250	3,527.12	133.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*80.39*	
26 24 19 00-0351	EA	Incoming Line And Feeder Circuit Breaker, Standard Mold, Type A, B, 400	5,770.47	144.27
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*86.58*	
26 24 19 00-0352	EA	Incoming Line And Feeder Circuit Breaker, Standard Mold, Type A, B, 600	7,614.83	185.50
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*111.25*	
26 24 19 00-0353	EA	Incoming Line And Feeder Circuit Breaker, Standard Mold, Type A, B, 800	8,914.32	283.39
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*170.09*	
26 24 19 00-0354	EA	Incoming Line And Feeder Circuit Breaker, Standard Mold, Type A, B, 1200	12,607.11	427.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*256.80*	
26 24 19 00-0355	EA	Incoming Line And Feeder Circuit Breaker, Standard Mold, Type A, B, 2000	27,883.23	566.78
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*339.78*	
26 24 19 00-0356	EA	Incoming Line And Feeder Circuit Breaker, Standard Mold, Type A, B, 2500	41,754.25	711.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*426.23*	
26 24 19 00-0357	EA	Incoming Line And Feeder Circuit Breaker, Standard Mold, Type A, B, 3000	69,899.28	824.31
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*495.07*	
26 24 19 00-0358	EA	Incoming Line And Feeder Circuit Breaker, Current Limiting Mold, Case Circuit Breakers, 50	2,236.20	66.98
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*40.19*	
26 24 19 00-0359	EA	Incoming Line And Feeder Circuit Breaker, Current Limiting Mold, Case Circuit Breakers, 150	3,591.10	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 24 19 00-0360	EA	Incoming Line And Feeder Circuit Breaker, Current Limiting Mold, Case Circuit Breakers, 50	2,236.20	66.98
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*40.19*	
26 24 19 00-0361	EA	Incoming Line And Feeder Circuit Breaker, Current Limiting Mold, Case Circuit Breakers, 50/50	3,591.10	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 24 19 00-0362	EA	Incoming Line And Feeder Circuit Breaker, Current Limiting Mold, Case Circuit Breakers, 50/150	3,834.97	66.98
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*40.19*	
26 24 19 00-0363	EA	Incoming Line And Feeder Circuit Breaker, Current Limiting Mold, Case Circuit Breakers, 150/150	5,243.43	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 24 19 00-0364	EA	Incoming Line And Feeder Circuit Breaker, Current Limiting Mold, Case Circuit Breakers, 50	6,523.52	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 24 19 00-0365	EA	Incoming Line And Feeder Circuit Breaker, Current Limiting Mold, Case Circuit Breakers, 100	3,406.32	103.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 24 19 00-0366	EA	Incoming Line And Feeder Circuit Breaker, Current Limiting Mold, Case Circuit Breakers, 400	8,614.39	283.39
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*170.09*	
26 24 19 00-0367	EA	Incoming Line And Feeder Circuit Breaker, Current Limiting Mold, Case Circuit Breakers, 125-225	8,614.39	283.39
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*170.09*	
26 24 19 00-0368	EA	Incoming Line And Feeder Circuit Breaker, Current Limiting Mold, Case Circuit Breakers, 125-400	11,651.43	309.15
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*185.41*	
26 24 19 00-0369	EA	Incoming Line And Feeder Circuit Breaker, Current Limiting Mold, Case Circuit Breakers, 300-600	14,566.35	360.68
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*216.32*	
26 24 19 00-0370	EA	Incoming Line And Feeder Circuit Breaker, Current Limiting Mold, Case Circuit Breakers, 300-800	16,752.67	427.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*256.80*	

26 24 19 00-0371 Incoming Line And Feeder Fusible Switches *(26 24 19 00-0268)*

26 24 19 00-0372	EA	30 To 60 Amperes, Incoming Line And Feeder Fusible Switches	2,008.66	103.05
26 24 19 00-0373	EA	Incoming Line And Feeder Fusible Switches, 30 Dual / 60 Dual	3,129.51	103.05
26 24 19 00-0374	EA	100 Amperes, Incoming Line And Feeder Fusible Switches	3,198.07	128.81
26 24 19 00-0375	EA	200 Amperes, Incoming Line And Feeder Fusible Switches	5,234.09	154.57
26 24 19 00-0376	EA	400 Amperes, Incoming Line And Feeder Fusible Switches	10,383.35	195.80
26 24 19 00-0377	EA	600 Amperes, Incoming Line And Feeder Fusible Switches	14,574.80	257.62
26 24 19 00-0378	EA	800 Amperes, Incoming Line And Feeder Fusible Switches	35,619.24	345.22
26 24 19 00-0379	EA	1,200 Amperes, Incoming Line And Feeder Fusible Switches	40,132.43	479.19

26 24 19 00-0380 Dry Type Distribution Transformers *(26 24 19 00-0268)*

26 24 19 00-0381	EA	500 VA, Phase 1, Dry Type Distribution Transformers	1,826.40	
26 24 19 00-0382	EA	750 VA, Phase 1, Dry Type Distribution Transformers	1,885.32	
26 24 19 00-0383	EA	1,000 VA, Phase 1, Dry Type Distribution Transformers	1,946.91	
26 24 19 00-0384	EA	1,500 VA, Phase 1, Dry Type Distribution Transformers	2,233.46	
26 24 19 00-0385	EA	2,000 VA, Phase 1, Dry Type Distribution Transformers	2,420.92	
26 24 19 00-0386	EA	3,000 VA, Phase 1, Dry Type Distribution Transformers	2,739.58	
26 24 19 00-0387	EA	5,000 VA, Phase 1, Dry Type Distribution Transformers	3,293.95	
26 24 19 00-0388	EA	7,500 VA, Phase 1, Dry Type Distribution Transformers	3,711.72	
26 24 19 00-0389	EA	9,000 VA, Phase 3, Dry Type Distribution Transformers	8,628.54	
26 24 19 00-0390	EA	10,000 VA, Phase 1, Dry Type Distribution Transformers	4,579.39	
26 24 19 00-0391	EA	15,000 VA, Phase 1, Dry Type Distribution Transformers	6,344.20	
26 24 19 00-0392	EA	15,000 VA, Phase 3, Dry Type Distribution Transformers	9,887.21	
26 24 19 00-0393	EA	20,000 VA, Phase 1, Dry Type Distribution Transformers	9,156.11	
26 24 19 00-0394	EA	30,000 VA, Phase 1, Dry Type Distribution Transformers	12,688.40	
26 24 19 00-0395	EA	30,000 VA, Phase 3, Dry Type Distribution Transformers	13,097.90	
26 24 19 00-0396	EA	45,000 VA, Phase 1, Dry Type Distribution Transformers	18,143.02	

26 24 19 00-0397 Metering Equipment *(26 24 19 00-0268)*

26 24 19 00-0398	EA	Metering Equipment, Voltmeter, Panel Type	862.32	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 19 00-0399	EA	Metering Equipment, Voltmeter, Switchboard Type	1,885.32	
26 24 19 00-0400	EA	Metering Equipment, Ammeter, Panel	776.62	
26 24 19 00-0401	EA	Metering Equipment, Ammeter, Switchboard Type	1,885.32	
26 24 19 00-0402	EA	Metering Equipment, Voltmeter/Ammeter, Switch	1,047.10	
26 24 19 00-0403	EA	Metering Equipment, Control Switch, 4 Circuits	1,111.37	
26 24 19 00-0404	EA	Add For Additional Circuits	140.43	
26 24 19 00-0405	EA	Metering Equipment, Indicating Wattmeter	3,888.47	
26 24 19 00-0406	EA	Metering Equipment, Indicating Power Factor	4,073.25	
26 24 19 00-0407	EA	Metering Equipment, Integrating Watt-hour	3,591.21	
26 24 19 00-0408	EA	Add For Demand Attachment	919.15	
26 24 19 00-0409	EA	800 Amperes, Metering Equipment, Current Transformer	1,073.88	
26 24 19 00-0410	EA	1,000 Amperes, Metering Equipment, Current Transformer	1,853.18	
26 24 19 00-0411	EA	2,000 Amperes, Metering Equipment, Current Transformer	2,158.47	
26 24 19 00-0412	EA	Metering Equipment, Potential Transformer	1,799.62	
26 24 19 00-0413	EA	Metering Equipment, Surge Arrester	1,936.20	
26 24 19 00-0414	EA	Metering Equipment, Ground Detector System	1,480.94	

26 24 19 00-0415 Current Limiting Reactors *(26 24 19 00-0268)*

26 24 19 00-0416	EA	600 Amperes, Current Limiting Reactors	33,054.66	
26 24 19 00-0417	EA	800 Amperes, Current Limiting Reactors	48,137.20	
26 24 19 00-0418	EA	1,000 Amperes, Current Limiting Reactors	63,254.56	
26 24 19 00-0419	EA	1,200 Amperes, Current Limiting Reactors	96,285.11	

26 24 19 00-0420 Incoming Line Cable Space Requirements, Main Lugs Only *(26 24 19 00-0268)*

26 24 19 00-0421	EA	Incoming Line Cable Space Requirement, 350 MCC, 2 Screw	533.25	
26 24 19 00-0422	EA	Incoming Line Cable Space Requirement, 350 MCC, 2 Crimp	533.25	
26 24 19 00-0423	EA	Incoming Line Cable Space Requirement, 350 MCC, 4 Screw	737.21	
26 24 19 00-0424	EA	Incoming Line Cable Space Requirement, 350 MCC, 4 Crimp	1,349.10	
26 24 19 00-0425	EA	Incoming Line Cable Space Requirement, 600 MCC, 2 Screw	737.21	
26 24 19 00-0426	EA	Incoming Line Cable Space Requirement, 600 MCC, 2 Crimp	941.17	
26 24 19 00-0427	EA	Incoming Line Cable Space Requirement, 600 MCC, 4 Screw	941.17	
26 24 19 00-0428	EA	Incoming Line Cable Space Requirement, 600 MCC, 4 Crimp	1,346.64	
26 24 19 00-0429	EA	Incoming Line Cable Space Requirement, 750 MCC, 2 Screw	941.17	
26 24 19 00-0430	EA	Incoming Line Cable Space Requirement, 750 MCC, 2 Crimp	1,346.64	
26 24 19 00-0431	EA	Incoming Line Cable Space Requirement, 750 MCC, 4 Screw	1,145.13	
26 24 19 00-0432	EA	Incoming Line Cable Space Requirement, 750 MCC, 4 Crimp	3,713.08	
26 24 19 00-0433	EA	Incoming Line Cable Space Requirement, 1,000 MCC, 2 Screw	1,145.13	
26 24 19 00-0434	EA	Incoming Line Cable Space Requirement, 1,000 MCC, 2 Crimp	1,346.64	
26 24 19 00-0435	EA	Incoming Line Cable Space Requirement, 1,000 MCC, 4 Screw	3,713.08	
26 24 19 00-0436	EA	Incoming Line Cable Space Requirement, 1,000 MCC, 4 Crimp	3,713.08	
26 24 19 00-0437	EA	Bus Duct Transition Pull Box	1,221.31	
26 24 19 00-0438	EA	Throat And Transition To Substation	2,357.73	
26 24 19 00-0439	EA	Service Entrance Label Signage	510.60	
26 24 19 00-0440	EA	Type W To 5 Star - 10" Transition	1,067.28	
26 24 19 00-0441	EA	600 Amperes, Sub Feed Lugs On Main Bus	610.21	

26 24 19 00-0442 Standard Structures And Structure Options/Modifications *(26 24 19 00-0268)*

26 24 19 00-0443	EA	Standard Structure Add For Each Additional 4" Of Structure Width	337.16	
26 24 19 00-0444	EA	Standard Structure Add For 8" Vertical Wireway In Lieu Of 4"	337.16	
26 24 19 00-0445	EA	Standard Structure Single Corner Section "L", 16" Depth	1,043.03	
26 24 19 00-0446	EA	Standard Structure Single Corner Section "L", 21" Depth	1,176.44	
26 24 19 00-0447	EA	Standard Structure Unused Space/Future Space	100.66	
26 24 19 00-0448	EA	Standard Structure NEMA 12 Dustproof	271.67	
26 24 19 00-0449	EA	Standard Structure Bottom Plate For NEMA 1 Gasket Enclosure	57.00	
26 24 19 00-0450	EA	Standard Structure 150 Watt Space	244.99	
26 24 19 00-0451	EA	Standard Structure Thermostat For Space Heater Control	742.98	
26 24 19 00-0452	EA	Standard Structure Rear Hinged Structure Door, 72" High	244.99	
26 24 19 00-0453	EA	Standard Structure NEMA 2 Drip Shield On Top Of MCC	480.00	
26 24 19 00-0454	EA	Standard Structure NEMA 3R N-Walk In Front Mounted	6,847.67	
26 24 19 00-0455	EA	Standard Structure NEMA 3R N-Walk In Back-to-back	7,914.91	
26 24 19 00-0456	EA	Standard Structure NEMA 3R Walk-In Aisle Front Mounted	7,922.57	

26 24 19 00-0457 Installation Hours For Vertical Sections *(26 24 19 00-0268)*

26 24 19 00-0458	EA	Install Vertical Section, 230/480 Volt, 1 Section, 600 Amperes	618.28	309.15
26 24 19 00-0459	EA	Install Vertical Section, 230/480 Volt, 2 Section, 600 Amperes	927.42	463.73
26 24 19 00-0460	EA	Install Vertical Section, 230/480 Volt, 3 Section, 600 Amperes	1,030.52	515.26
26 24 19 00-0461	EA	Install Vertical Section, 230/480 Volt, 4 Section, 600 Amperes	1,236.72	618.31
26 24 19 00-0462	EA	Bolt To Floor, Vertical Section, 230/480 Volt, 600 Amperes	103.05	51.52
26 24 19 00-0463	EA	Install Vertical Section, 230/480 Volt, 1 Section, 800 Amperes	618.28	309.15
26 24 19 00-0464	EA	Install Vertical Section, 230/480 Volt, 2 Section, 800 Amperes	927.42	463.73
26 24 19 00-0465	EA	Install Vertical Section, 230/480 Volt, 3 Section, 800 Amperes	1,030.52	515.26
26 24 19 00-0466	EA	Install Vertical Section, 230/480 Volt, 4 Section, 800 Amperes	1,236.72	618.31
26 24 19 00-0467	EA	Bolt To Floor, Vertical Section, 230/480 Volt, 800 Amperes	103.05	51.52
26 24 19 00-0468	EA	Install Vertical Section, 230/480 Volt, 1 Section, 1,200 Amperes	721.37	360.68
26 24 19 00-0469	EA	Install Vertical Section, 230/480 Volt, 2 Section, 1,200 Amperes	927.42	463.73
26 24 19 00-0470	EA	Install Vertical Section, 230/480 Volt, 3 Section, 1,200 Amperes	1,236.72	618.31

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 19 00-0471	EA	Install Vertical Section, 230/480 Volt, 4 Section, 1,200 Amperes	1,442.53	721.26
26 24 19 00-0472	EA	Bolt To Floor, Vertical Section, 230/480 Volt, 1,200 Amperes	154.57	77.29
26 24 19 00-0473	EA	Install Vertical Section, 230/480 Volt, 1 Section, 1,600 Amperes	824.41	412.21
26 24 19 00-0474	EA	Install Vertical Section, 230/480 Volt, 2 Section, 1,600 Amperes	1,133.66	566.78
26 24 19 00-0475	EA	Install Vertical Section, 230/480 Volt, 3 Section, 1,600 Amperes	1,442.53	721.26
26 24 19 00-0476	EA	Install Vertical Section, 230/480 Volt, 4 Section, 1,600 Amperes	1,648.54	824.31
26 24 19 00-0477	EA	Bolt To Floor, Vertical Section, 230/480 Volt, 1,600 Amperes	206.10	103.05
26 24 19 00-0478	EA	Install Vertical Section, 230/480 Volt, 1 Section, 2,000 Amperes	824.41	412.21
26 24 19 00-0479	EA	Install Vertical Section, 230/480 Volt, 2 Section, 2,000 Amperes	1,236.72	618.31
26 24 19 00-0480	EA	Install Vertical Section, 230/480 Volt, 3 Section, 2,000 Amperes	1,545.60	772.78
26 24 19 00-0481	EA	Install Vertical Section, 230/480 Volt, 4 Section, 2,000 Amperes	1,751.99	876.04
26 24 19 00-0482	EA	Bolt To Floor, Vertical Section, 230/480 Volt, 2,000 Amperes	206.10	103.05

26 24 19 00-0483 Motor Control Centers *(26 24 19)*

26 24 19 00-0484 2.4 KV Motor Control Centers *(26 24 19 00-0483)*

26 24 19 00-0485	EA	2.4 KV CL 11-202, Squirrel Cage Motor Control, 100 To 300 Hp	16,977.87	206.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*123.66*	
26 24 19 00-0486	EA	2.4 KV CL 11-202, Squirrel Cage Motor Control, 400 Hp	16,977.87	206.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*123.66*	
26 24 19 00-0487	EA	2.4 KV CL 11-202, Squirrel Cage Motor Control, 600 Hp	16,977.87	206.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*123.66*	
26 24 19 00-0488	EA	2.4 KV CL 11-202, Squirrel Cage Motor Control, 700 Hp	17,029.42	231.86
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*139.13*	
26 24 19 00-0489	EA	2.4 KV CL 11-202, Squirrel Cage Motor Control, 1,000 Hp	18,083.98	257.62
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*154.58*	
26 24 19 00-0490	EA	2,400 KV CL 11-202, Squirrel Cage Motor Control, 1,250 Hp	18,135.49	283.39
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*170.03*	
26 24 19 00-0491	EA	2.4 KV CL 11-202, Squirrel Cage Motor Control, 1,500 Hp	18,187.00	309.15
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*185.48*	
26 24 19 00-0492	EA	2.4 KV CL 11-202, Squirrel Cage Motor Control, 1,750 Hp	18,290.09	360.68
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*216.41*	
26 24 19 00-0493	EA	2.4 KV CL 11-202, Squirrel Cage Motor Control, 2,000 Hp	18,393.13	412.21
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*247.32*	
26 24 19 00-0494	EA	2.4 KV CL 11-202, Squirrel Cage Motor Control, 2,250 Hp	30,998.91	463.73
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*278.23*	
26 24 19 00-0495	EA	2.4 KV CL 11-202, Squirrel Cage Motor Control, 2,500 Hp	33,270.24	515.26
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*309.16*	
26 24 19 00-0496	EA	2.4 KV CL 13-202, Wound Rotor Motor Control, 100 Hp	25,200.93	206.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*123.66*	
26 24 19 00-0497	EA	2.4 KV CL 13-202, Wound Rotor Motor Control, 150 Hp	26,253.14	221.57
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*132.94*	
26 24 19 00-0498	EA	2.4 KV CL 13-202, Wound Rotor Motor Control, 200 Hp	29,826.33	242.17
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*145.30*	
26 24 19 00-0499	EA	2.4 KV CL 13-202, Wound Rotor Motor Control, 300 Hp	33,200.78	257.62
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*154.58*	
26 24 19 00-0500	EA	2.4 KV CL 13-202, Wound Rotor Motor Control, 400 Hp	36,120.19	298.85
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*179.32*	
26 24 19 00-0501	EA	2.4 KV CL 13-202, Wound Rotor Motor Control, 600 Hp	39,575.84	319.46
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*191.68*	
26 24 19 00-0502	EA	2.4 KV CL 13-202, Wound Rotor Motor Control, 700 Hp	43,029.44	340.07
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*204.03*	
26 24 19 00-0503	EA	2.4 KV CL 13-202, Wound Rotor Motor Control, 1,000 Hp	47,125.86	370.98
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*222.60*	
26 24 19 00-0504	EA	2.4 KV CL 13-202, Wound Rotor Motor Control, 1,250 Hp	54,841.65	412.21
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*247.32*	
26 24 19 00-0505	EA	2.4 KV CL 13-202, Wound Rotor Motor Control, 1,500 Hp	59,418.14	437.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*262.80*	
26 24 19 00-0506	EA	2.4 KV CL 13-202, Wound Rotor Motor Control, 1,750 Hp	90,758.67	515.26
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*309.16*	
26 24 19 00-0507	EA	2.4 KV CL 13-202, Wound Rotor Motor Control, 2,000 Hp	96,697.79	566.78
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*340.10*	
26 24 19 00-0508	EA	2.4 KV CL 13-202, Wound Rotor Motor Control, 2,250 Hp	101,866.80	618.31
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*371.02*	
26 24 19 00-0509	EA	2.4 KV CL 13-202, Wound Rotor Motor Control, 2,500 Hp	110,922.53	669.94
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*401.97*	
26 24 19 00-0510	EA	2.4 KV CL 14-202, Synchronous Motor Control, 100 To 300 Hp	23,776.38	206.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*123.66*	
26 24 19 00-0511	EA	2.4 KV CL 14-202, Synchronous Motor Control, 400 Hp	23,827.93	231.86
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*139.13*	
26 24 19 00-0512	EA	2.4 KV CL 14-202, Synchronous Motor Control, 600 Hp	23,879.43	257.62
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*154.58*	
26 24 19 00-0513	EA	2.4 KV CL 14-202, Synchronous Motor Control, 700 Hp	23,930.94	283.39
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*170.03*	
26 24 19 00-0514	EA	2.4 KV CL 14-202, Synchronous Motor Control, 1,000 Hp	23,986.51	309.15
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*185.48*	
26 24 19 00-0515	EA	2,400 Volt CL 14-202, Synchronous Motor Control, 1,250 HP	24,038.09	334.92
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*200.96*	
26 24 19 00-0516	EA	2.4 KV CL 14-202, Synchronous Motor Control, 1,500 Hp	24,089.60	360.68
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*216.41*	
26 24 19 00-0517	EA	2.4 KV CL 14-202, Synchronous Motor Control, 1,750 Hp	24,295.65	463.73
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*278.23*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 19 00-0518	EA	2.4 KV CL 14-202, Synchronous Motor Control, 2,000 Hp	41,426.42	515.26
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*309.16*	
26 24 19 00-0519	EA	2.4 KV CL 14-202, Synchronous Motor Control, 2,250 Hp	41,529.56	566.78
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*340.10*	
26 24 19 00-0520	EA	2.4 KV CL 14-202, Synchronous Motor Control, 2,500 Hp	43,788.69	618.31
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*371.02*	
26 24 19 00-0521	EA	Add For Reversing Starters, 100 To 700 HP	9,345.08	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 24 19 00-0522	EA	Add For Reversing Starters, 1,000 To 1,500 Hp	9,628.77	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 24 19 00-0523	EA	Add For Reversing Starters, 1,750 To 2,500 HP	14,745.38	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	

26 24 19 00-0524 4.8 KV Motor Control Centers *(26 24 19 00-0483)*

26 24 19 00-0525	EA	4.8 KV CL 11-202, Squirrel Cage Motor Control, 100 To 600 HP	18,470.70	309.15
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*185.48*	
26 24 19 00-0526	EA	4.8 KV CL 11-202, Squirrel Cage Motor Control, 700 HP	18,522.28	334.92
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*200.96*	
26 24 19 00-0527	EA	4.8 KV CL 11-202, Squirrel Cage Motor Control, 1,000 HP	18,573.79	360.68
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*216.41*	
26 24 19 00-0528	EA	4.8 KV CL 11-202, Squirrel Cage Motor Control, 1,250 HP	18,625.34	386.45
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*231.88*	
26 24 19 00-0529	EA	4.8 KV CL 11-202, Squirrel Cage Motor Control, 1,500 HP	19,669.75	412.21
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*247.32*	
26 24 19 00-0530	EA	4.8 KV CL 11-202, Squirrel Cage Motor Control, 1,750 HP	19,721.33	437.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*262.80*	
26 24 19 00-0531	EA	4.8 KV CL 11-202, Squirrel Cage Motor Control, 2,000 HP	19,772.76	463.73
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*278.23*	
26 24 19 00-0532	EA	4.8 KV CL 11-202, Squirrel Cage Motor Control, 2,250 HP	19,824.39	489.50
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*293.72*	
26 24 19 00-0533	EA	4.8 KV CL 11-202, Squirrel Cage Motor Control, 2,500 HP	19,875.86	515.26
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*309.16*	
26 24 19 00-0534	EA	4.8 KV CL 11-202, Squirrel Cage Motor Control, 3,000 HP	33,691.07	669.94
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*401.97*	
26 24 19 00-0535	EA	4.8 KV CL 11-202, Squirrel Cage Motor Control, 3,500 HP	33,793.70	721.26
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*432.76*	
26 24 19 00-0536	EA	4.8 KV CL 11-202, Squirrel Cage Motor Control, 4,000 HP	36,054.87	772.78
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*463.68*	
26 24 19 00-0537	EA	4.8 KV CL 11-202, Squirrel Cage Motor Control, 4,500 HP	36,157.81	824.31
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*494.56*	
26 24 19 00-0538	EA	4.8 KV CL 13-202, Wound Rotor Motor Control, 100 HP	25,694.74	309.15
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*185.48*	
26 24 19 00-0539	EA	4.8 KV CL 13-202, Wound Rotor Motor Control, 150 HP	26,030.02	334.92
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*200.96*	
26 24 19 00-0540	EA	4.8 KV CL 13-202, Wound Rotor Motor Control, 200 HP	30,357.19	360.68
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*216.41*	
26 24 19 00-0541	EA	4.8 KV CL 13-202, Wound Rotor Motor Control, 300 HP	33,742.14	386.45
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*231.88*	
26 24 19 00-0542	EA	4.8 KV CL 13-202, Wound Rotor Motor Control, 400 HP	36,630.56	412.21
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*247.32*	
26 24 19 00-0543	EA	4.8 KV CL 13-202, Wound Rotor Motor Control, 600 HP	40,096.59	437.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*262.80*	
26 24 19 00-0544	EA	4.8 KV CL 13-202, Wound Rotor Motor Control, 700 HP	43,349.70	463.73
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*278.23*	
26 24 19 00-0545	EA	4.8 KV CL 13-202, Wound Rotor Motor Control, 1,000 HP	47,646.60	489.50
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*293.72*	
26 24 19 00-0546	EA	4.8 KV CL 13-202, Wound Rotor Motor Control, 1,250 HP	55,195.68	515.26
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*309.16*	
26 24 19 00-0547	EA	4.8 KV CL 13-202, Wound Rotor Motor Control, 1,500 HP	60,325.34	541.02
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*324.62*	
26 24 19 00-0548	EA	4.8 KV CL 13-202, Wound Rotor Motor Control, 1,750 HP	65,506.52	592.55
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*355.54*	
26 24 19 00-0549	EA	4.8 KV CL 13-202, Wound Rotor Motor Control, 2,000 HP	69,791.21	618.31
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*371.02*	
26 24 19 00-0550	EA	4.8 KV CL 13-202, Wound Rotor Motor Control, 2,250 HP	73,832.58	644.07
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*386.44*	
26 24 19 00-0551	EA	4.8 KV CL 13-202, Wound Rotor Motor Control, 2,500 HP	79,487.28	669.94
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*401.97*	
26 24 19 00-0552	EA	4.8 KV CL 13-202, Wound Rotor Motor Control, 3,000 HP	126,017.67	824.31
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*494.56*	
26 24 19 00-0553	EA	4.8 KV CL 13-202, Wound Rotor Motor Control, 3,500 HP	140,143.68	876.04
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*525.60*	
26 24 19 00-0554	EA	4.8 KV CL 13-202, Wound Rotor Motor Control, 4,000 HP	168,463.89	927.46
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*556.46*	
26 24 19 00-0555	EA	4.8 KV CL 13-202, Wound Rotor Motor Control, 4,500 HP	178,200.65	927.46
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*556.46*	
26 24 19 00-0556	EA	4.8 KV CL 14-202, Synchronous Motor Control, 100 To 600 HP	25,368.24	360.68
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*216.41*	
26 24 19 00-0557	EA	4.8 KV CL 14-202, Synchronous Motor Control, 700 HP	25,419.79	386.45
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*231.88*	
26 24 19 00-0558	EA	4.8 KV CL 14-202, Synchronous Motor Control, 1,000 HP	25,471.28	412.21
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*247.32*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 19 00-0559	EA	4.8 KV CL 14-202, Synchronous Motor Control, 1,250 HP	25,522.86	437.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*262.80*	
26 24 19 00-0560	EA	4.8 KV CL 14-202, Synchronous Motor Control, 1,500 HP	27,710.10	463.73
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*278.23*	
26 24 19 00-0561	EA	4.8 KV CL 14-202, Synchronous Motor Control, 1,750 HP	27,761.73	489.50
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*293.72*	
26 24 19 00-0562	EA	4.8 KV CL 14-202, Synchronous Motor Control, 2,000 HP	27,813.20	515.26
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*309.16*	
26 24 19 00-0563	EA	4.8 KV CL 14-202, Synchronous Motor Control, 2,250 HP	27,864.75	541.02
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*324.62*	
26 24 19 00-0564	EA	4.8 KV CL 14-202, Synchronous Motor Control, 2,500 HP	27,916.34	566.78
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*340.10*	
26 24 19 00-0565	EA	4.8 KV CL 14-202, Synchronous Motor Control, 3,000 HP	28,225.21	721.26
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*432.76*	
26 24 19 00-0566	EA	4.8 KV CL 14-202, Synchronous Motor Control, 3,500 HP	45,639.65	772.78
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*463.68*	
26 24 19 00-0567	EA	4.8 KV CL 14-202, Synchronous Motor Control, 4,000 HP	47,890.55	824.31
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*494.56*	
26 24 19 00-0568	EA	4.8 KV CL 14-202, Synchronous Motor Control, 4,500 HP	47,890.55	824.31
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*494.56*	
26 24 19 00-0569	EA	Add For Reversing Starters, 100 To 1,250 HP	11,288.82	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 24 19 00-0570	EA	Add For Reversing Starters, 1,500 To 2,500 HP	11,632.86	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	
26 24 19 00-0571	EA	Add For Reversing Starters, 3,000 To 4,500 HP	17,837.71	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.83*	

26 24 19 00-0572 2.4/4.8 KV Motor Control Centers, Accessories *(26 24 19 00-0483)*

26 24 19 00-0573	EA	2.4/4.8 KV Load Break Disconnect Switch 600 Amperes	14,664.94	206.10
26 24 19 00-0574	EA	2.4/4.8 KV Load Break Disconnect Switch 1,200 Amperes	17,601.14	309.15
26 24 19 00-0575	EA	2.4/4.8 KV NEMA 3 Weather Resistant	5,801.84	
26 24 19 00-0576	EA	2.4/4.8 KV Space Heaters	291.73	15.46
26 24 19 00-0577	EA	2.4/4.8 KV Potential Transformer Fused	1,680.84	
26 24 19 00-0578	EA	2.4/4.8 KV Current Transformer 600 Volt, 5 KVA	901.85	
26 24 19 00-0579	EA	2.4/4.8 KV Control Transformer 4 KVA Max	2,685.90	
26 24 19 00-0580	EA	2.4/4.8 KV Pushbuttons Each	172.02	
26 24 19 00-0581	EA	2.4/4.8 KV Selector Switch Each	570.11	
26 24 19 00-0582	EA	2.4/4.8 KV Indicating Light	172.02	
26 24 19 00-0583	EA	2.4/4.8 KV Push To Test Light	520.96	
26 24 19 00-0584	EA	2.4/4.8 KV AC Voltmeter, Switchboard Type	1,385.95	
26 24 19 00-0585	EA	2.4/4.8 KV AC Ammeter, Switchboard Type	1,385.95	
26 24 19 00-0586	EA	2.4/4.8 KV Power Factor Meter	4,145.58	
26 24 19 00-0587	EA	2.4/4.8 KV Watt Hr Meter, 2 Element Drawout	2,857.92	
26 24 19 00-0588	EA	2.4/4.8 KV Operation Counter	551.87	15.46
26 24 19 00-0589	EA	2.4/4.8 KV Phase Failure Protection	3,990.60	51.52
26 24 19 00-0590	EA	2.4/4.8 KV Ground Protection	7,649.70	25.76
26 24 19 00-0591	EA	2.4/4.8 KV Synchronous Motor DC Protection	2,815.50	25.76
26 24 19 00-0592	EA	2.4/4.8 KV Lightning Arresters	5,630.07	15.46
26 24 19 00-0593	EA	2.4/4.8 KV Portable Lifting Mechanism	8,161.78	
26 24 19 00-0594	EA	2.4/4.8 KV Auxiliary Timing Relay	1,103.06	51.52
26 24 19 00-0595	EA	2.4/4.8 KV Auxiliary Control Relay	764.35	51.52

26 24 19 00-0596 Incoming Section And Feeder Air Circuit Breakers *(26 24 19 00-0483)*

Note: 3 Pole. Includes structure.

26 24 19 00-0597	EA	Incoming Section MCC, Air Circuit Breaker, 70 - 100 Amperes, 14,000 Ampere IC, 3-Pole, With Structure Included	1,236.67	309.08
26 24 19 00-0598	EA	Incoming Section MCC, Air Circuit Breaker, 125 - 225 Amperes, 22,000 Ampere IC, 3-Pole, With Structure Included	2,143.51	547.08
26 24 19 00-0599	EA	Incoming Section MCC, Air Circuit Breaker, 125 - 400 Amperes, 30,000 Ampere IC, 3-Pole, With Structure Included	2,549.21	700.49
26 24 19 00-0600	EA	Incoming Section MCC, Air Circuit Breaker, 125 - 600 Amperes, 30,000 Ampere IC, 3-Pole, With Structure Included	4,100.99	1,128.00
26 24 19 00-0601	EA	Incoming Section MCC, Air Circuit Breaker, 125 - 1,200 Amperes, 30,000 Ampere IC, 3-Pole, With Structure Included	4,837.26	1,240.80
26 24 19 00-0602	EA	Incoming Section MCC, Air Circuit Breaker, 125 - 2,000 Amperes, 30,000 Ampere IC, 3-Pole, With Structure Included	6,301.87	1,376.16
26 24 19 00-0603	EA	Incoming Section MCC, Air Circuit Breaker, 125 - 400 Amperes, 45,000 Ampere IC, 3-Pole, With Structure Included	7,331.13	1,613.05
26 24 19 00-0604	EA	Incoming Section MCC, Air Circuit Breaker, 125 - 400 Amperes, 100,000 Ampere IC, 3-Pole, With Structure Included	12,924.32	1,879.26

26 24 19 00-0605 Main Lugs Only *(26 24 19 00-0483)*

26 24 19 00-0606	EA	600 Amperes Incoming Section, Main Lugs	949.62	394.80
26 24 19 00-0607	EA	800 Amperes Incoming Section, Main Lugs	1,029.48	394.80
26 24 19 00-0608	EA	1,200 Amperes Incoming Section, Main Lugs	1,434.47	620.41
26 24 19 00-0609	EA	2,000 Amperes Incoming Section, Main Lugs	3,625.06	1,128.00
26 24 19 00-0610	EA	3,000 Amperes Incoming Section, Main Lugs	5,528.41	1,635.61
26 24 19 00-0611	EA	4,000 Amperes Incoming Section, Main Lugs	7,921.06	2,256.01

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 19 00-0612		**Incoming Main Circuit Breaker Structure** *(26 24 19 00-0483)* Note: Includes structure, main breaker, 42 KA bus bracing, 600 A tin plated copper bus, NEMA 1 enclosure, 15" cabinet depth, and 1/4" x 2" tin plated copper horizontal ground bus.		
26 24 19 00-0613	EA	225 Amperes, Main Circuit Breaker Section	6,884.04	545.84
		For 800 Amperes, Tin Plated Copper Bus, Add	*182.00*	
		For 1,200 Amperes, Tin Plated Copper Bus, Add	*334.00*	
		For NEMA 1 With Gaskets, Add	*97.00*	
		For NEMA 12, Add	*245.00*	
		For 20" Cabinet Depth, Add	*108.00*	
26 24 19 00-0614	EA	400 Amperes, Main Circuit Breaker Section	14,722.59	701.17
		For 800 Amperes, Tin Plated Copper Bus, Add	*182.00*	
		For 1,200 Amperes, Tin Plated Copper Bus, Add	*334.00*	
		For NEMA 1 With Gaskets, Add	*97.00*	
		For NEMA 12, Add	*245.00*	
		For 20" Cabinet Depth, Add	*108.00*	
26 24 19 00-0615	EA	600 Amperes, Main Circuit Breaker Section	15,199.43	1,092.14
		For 800 Amperes, Tin Plated Copper Bus, Add	*182.00*	
		For 1,200 Amperes, Tin Plated Copper Bus, Add	*334.00*	
		For NEMA 1 With Gaskets, Add	*97.00*	
		For NEMA 12, Add	*245.00*	
		For 20" Cabinet Depth, Add	*108.00*	
26 24 19 00-0616	EA	800 Amperes, Main Circuit Breaker Section	21,706.02	1,092.14
		For 800 Amperes, Tin Plated Copper Bus, Add	*182.00*	
		For 1,200 Amperes, Tin Plated Copper Bus, Add	*334.00*	
		For NEMA 1 With Gaskets, Add	*97.00*	
		For NEMA 12, Add	*245.00*	
		For 20" Cabinet Depth, Add	*108.00*	
26 24 19 00-0617	EA	1,200 Amperes, Main Circuit Breaker Section	31,499.44	1,235.73
		For 800 Amperes, Tin Plated Copper Bus, Add	*182.00*	
		For 1,200 Amperes, Tin Plated Copper Bus, Add	*334.00*	
		For NEMA 1 With Gaskets, Add	*97.00*	
		For NEMA 12, Add	*245.00*	
		For 20" Cabinet Depth, Add	*108.00*	
26 24 19 00-0618		**Incoming Fusible Main Disconnect Section** *(26 24 19 00-0483)* Note: Includes structure, fuses, 42 KA bus bracing, 600 A tin plated copper bus, NEMA 1 enclosure, 15" cabinet depth, and 1/4" x 2" tin plated copper horizontal ground bus.		
26 24 19 00-0619	EA	200 Amperes, Fusible Main Disconnect Section	5,960.14	546.52
		For 800 Amperes, Tin Plated Copper Bus, Add	*182.00*	
		For 1,200 Amperes, Tin Plated Copper Bus, Add	*334.00*	
		For NEMA 1 With Gaskets, Add	*97.00*	
		For NEMA 12, Add	*245.00*	
		For 20" Cabinet Depth, Add	*108.00*	
26 24 19 00-0620	EA	400 Amperes, Fusible Main Disconnect Section	8,242.03	701.51
		For 800 Amperes, Tin Plated Copper Bus, Add	*182.00*	
		For 1,200 Amperes, Tin Plated Copper Bus, Add	*334.00*	
		For NEMA 1 With Gaskets, Add	*97.00*	
		For NEMA 12, Add	*245.00*	
		For 20" Cabinet Depth, Add	*108.00*	
26 24 19 00-0621	EA	600 Amperes, Fusible Main Disconnect Section	16,168.09	1,093.04
		For 800 Amperes, Tin Plated Copper Bus, Add	*182.00*	
		For 1,200 Amperes, Tin Plated Copper Bus, Add	*334.00*	
		For NEMA 1 With Gaskets, Add	*97.00*	
		For NEMA 12, Add	*245.00*	
		For 20" Cabinet Depth, Add	*108.00*	
26 24 19 00-0622	EA	800 Amperes, Fusible Main Disconnect Section	18,837.21	1,093.04
		For 800 Amperes, Tin Plated Copper Bus, Add	*182.00*	
		For 1,200 Amperes, Tin Plated Copper Bus, Add	*334.00*	
		For NEMA 1 With Gaskets, Add	*97.00*	
		For NEMA 12, Add	*245.00*	
		For 20" Cabinet Depth, Add	*108.00*	
26 24 19 00-0623	EA	1,200 Amperes, Fusible Main Disconnect Section	26,602.19	1,236.86
		For 800 Amperes, Tin Plated Copper Bus, Add	*182.00*	
		For 1,200 Amperes, Tin Plated Copper Bus, Add	*334.00*	
		For NEMA 1 With Gaskets, Add	*97.00*	
		For NEMA 12, Add	*245.00*	
		For 20" Cabinet Depth, Add	*108.00*	
26 24 19 00-0624		**Circuit Breaker Combination Starters** *(26 24 19 00-0483)*		
26 24 19 00-0625		**Class I, Type A** *(26 24 19 00-0624)*		
26 24 19 00-0626	EA	Size 1, Class I, Type A Circuit Breaker Combination Starter	1,040.10	228.98
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*130.56*	
26 24 19 00-0627	EA	Size 2, Class I, Type A Circuit Breaker Combination Starter	1,212.26	228.98
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*144.62*	
26 24 19 00-0628	EA	Size 3, Class I, Type A Circuit Breaker Combination Starter	1,764.80	324.86
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*194.48*	
26 24 19 00-0629	EA	Size 4, Class I, Type A Circuit Breaker Combination Starter	2,893.31	427.52
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*256.37*	
26 24 19 00-0630	EA	Size 5, Class I, Type A Circuit Breaker Combination Starter	5,228.34	534.67
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*320.46*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 19 00-0631		**Class I, Type B** *(26 24 19 00-0624)*		
26 24 19 00-0632	EA	Size 1, Class I, Type B Circuit Breaker Combination Starter	987.85	199.65
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*112.80*	
26 24 19 00-0633	EA	Size 2, Class I, Type B Circuit Breaker Combination Starter	1,153.63	199.65
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*127.03*	
26 24 19 00-0634	EA	Size 3, Class I, Type B Circuit Breaker Combination Starter	1,694.99	288.77
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*173.54*	
26 24 19 00-0635	EA	Size 4, Class I, Type B Circuit Breaker Combination Starter	2,822.09	391.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*235.00*	
26 24 19 00-0636	EA	Size 5, Class I, Type B Circuit Breaker Combination Starter	5,170.90	499.71
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*303.23*	
26 24 19 00-0637		**Class I, Type C** *(26 24 19 00-0624)*		
26 24 19 00-0638	EA	Size 1, Class I, Type C Circuit Breaker Combination Starter	1,046.14	184.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*102.17*	
26 24 19 00-0639	EA	Size 2, Class I, Type C Circuit Breaker Combination Starter	1,221.76	184.99
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*120.00*	
26 24 19 00-0640	EA	Size 3, Class I, Type C Circuit Breaker Combination Starter	1,819.08	276.36
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*165.89*	
26 24 19 00-0641	EA	Size 4, Class I, Type C Circuit Breaker Combination Starter	2,952.61	382.39
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*229.27*	
26 24 19 00-0642	EA	Size 5, Class I, Type C Circuit Breaker Combination Starter	5,293.40	490.69
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*293.75*	
26 24 19 00-0643		**Class II, Type B** *(26 24 19 00-0624)*		
26 24 19 00-0644	EA	Size 1, Class II, Type B Circuit Breaker Combination Starter	1,035.46	274.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*154.95*	
26 24 19 00-0645	EA	Size 2, Class II, Type B Circuit Breaker Combination Starter	1,440.88	274.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*173.01*	
26 24 19 00-0646	EA	Size 3, Class II, Type B Circuit Breaker Combination Starter	2,048.41	365.47
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*218.60*	
26 24 19 00-0647	EA	Size 4, Class II, Type B Circuit Breaker Combination Starter	3,362.86	468.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*282.00*	
26 24 19 00-0648	EA	Size 5, Class II, Type B Circuit Breaker Combination Starter	6,105.93	571.90
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*343.91*	
26 24 19 00-0649		**Class II, Type C** *(26 24 19 00-0624)*		
26 24 19 00-0650	EA	Size 1, Class II, Type C Circuit Breaker Combination Starter	1,303.10	259.44
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*148.42*	
26 24 19 00-0651	EA	Size 2, Class II, Type C Circuit Breaker Combination Starter	1,498.21	259.44
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*162.07*	
26 24 19 00-0652	EA	Size 3, Class II, Type C Circuit Breaker Combination Starter	2,178.34	354.19
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*212.03*	
26 24 19 00-0653	EA	Size 4, Class II, Type C Circuit Breaker Combination Starter	3,485.08	456.85
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*273.79*	
26 24 19 00-0654	EA	Size 5, Class II, Type C Circuit Breaker Combination Starter	6,243.96	564.00
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*339.76*	
26 24 19 00-0655		**Fused Disconnect Combination Starter** *(26 24 19 00-0483)*		
26 24 19 00-0656		**Class I, Type A** *(26 24 19 00-0655)*		
26 24 19 00-0657	EA	Size 1, Class I, Type A Fused Disconnect Combination Starter	947.68	210.94
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*127.03*	
26 24 19 00-0658	EA	Size 2, Class I, Type A Fused Disconnect Combination Starter	1,431.94	288.77
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*173.01*	
26 24 19 00-0659	EA	Size 3, Class I, Type A Fused Disconnect Combination Starter	2,283.86	375.62
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*225.60*	
26 24 19 00-0660	EA	Size 4, Class I, Type A Fused Disconnect Combination Starter	3,122.94	526.78
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*316.85*	
26 24 19 00-0661	EA	Size 5, Class I, Type A Fused Disconnect Combination Starter	5,495.59	671.17
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*402.86*	
26 24 19 00-0662		**Class I, Type B** *(26 24 19 00-0655)*		
26 24 19 00-0663	EA	Size 1, Class I, Type B Fused Disconnect Combination Starter	967.76	188.38
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*112.80*	
26 24 19 00-0664	EA	Size 2, Class I, Type B Fused Disconnect Combination Starter	1,302.87	258.31
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*154.95*	
26 24 19 00-0665	EA	Size 3, Class I, Type B Fused Disconnect Combination Starter	1,931.24	345.17
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*207.35*	
26 24 19 00-0666	EA	Size 4, Class I, Type B Fused Disconnect Combination Starter	3,238.16	498.58
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*300.00*	
26 24 19 00-0667	EA	Size 5, Class I, Type B Fused Disconnect Combination Starter	5,595.34	633.94
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*381.08*	
26 24 19 00-0668		**Class I, Type C** *(26 24 19 00-0655)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 19 00-0669	EA	Size 1, Class I, Type C Fused Disconnect Combination Starter	1,026.44	175.97
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*105.62*	
26 24 19 00-0670	EA	Size 2, Class I, Type C Fused Disconnect Combination Starter	1,379.33	239.14
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*144.62*	
26 24 19 00-0671	EA	Size 3, Class I, Type C Fused Disconnect Combination Starter	2,103.04	332.76
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*201.43*	
26 24 19 00-0672	EA	Size 4, Class I, Type C Fused Disconnect Combination Starter	3,408.88	490.69
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*293.75*	
26 24 19 00-0673	EA	Size 5, Class I, Type C Fused Disconnect Combination Starter	5,290.67	627.17
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*376.00*	
26 24 19 00-0674		**Class II, Type B** *(26 24 19 00-0655)*		
26 24 19 00-0675	EA	Size 1, Class II, Type B Fused Disconnect Combination Starter	1,218.11	263.96
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*158.43*	
26 24 19 00-0676	EA	Size 2, Class II, Type B Fused Disconnect Combination Starter	1,574.79	329.37
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*197.20*	
26 24 19 00-0677	EA	Size 3, Class II, Type B Fused Disconnect Combination Starter	2,288.55	424.13
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*254.06*	
26 24 19 00-0678	EA	Size 4, Class II, Type B Fused Disconnect Combination Starter	3,737.36	571.90
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*343.91*	
26 24 19 00-0679	EA	Size 5, Class II, Type B Fused Disconnect Combination Starter	6,434.88	714.03
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*427.28*	
26 24 19 00-0680		**Class II, Type C** *(26 24 19 00-0655)*		
26 24 19 00-0681	EA	Size 1, Class II, Type C Fused Disconnect Combination Starter	1,267.37	248.16
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*148.42*	
26 24 19 00-0682	EA	Size 2, Class II, Type C Fused Disconnect Combination Starter	1,650.86	311.33
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*186.76*	
26 24 19 00-0683	EA	Size 3, Class II, Type C Fused Disconnect Combination Starter	2,433.52	404.95
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*243.11*	
26 24 19 00-0684	EA	Size 4, Class II, Type C Fused Disconnect Combination Starter	3,891.53	558.36
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*335.72*	
26 24 19 00-0685	EA	Size 5, Class II, Type C Fused Disconnect Combination Starter	6,584.56	691.46
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*414.71*	
26 24 19 00-0686		**Space Complete With Bus And Hardware** *(26 24 19 00-0483)*		
26 24 19 00-0687		**Circuit Breaker Type** *(26 24 19 00-0686)*		
26 24 19 00-0688	EA	Circuit Breaker Type, Size 1 Space Complete With Bus And Hardware	291.29	76.70
26 24 19 00-0689	EA	Circuit Breaker Type, Size 2 Space Complete With Bus And Hardware	291.29	76.70
26 24 19 00-0690	EA	Circuit Breaker Type, Size 3 Space Complete With Bus And Hardware	433.19	111.68
26 24 19 00-0691	EA	Circuit Breaker Type, Size 4 Space Complete With Bus And Hardware	511.93	146.64
26 24 19 00-0692	EA	Circuit Breaker Type, Size 5 Space Complete With Bus And Hardware	863.08	223.34
26 24 19 00-0693		**Fused Disconnect Type** *(26 24 19 00-0686)*		
26 24 19 00-0694	EA	Fused Disconnect Type, Size 1 Space Complete With Bus And Hardware	291.29	76.70
26 24 19 00-0695	EA	Fused Disconnect Type, Size 2 Space Complete With Bus And Hardware	384.60	111.68
26 24 19 00-0696	EA	Fused Disconnect Type, Size 3 Space Complete With Bus And Hardware	535.70	146.64
26 24 19 00-0697	EA	Fused Disconnect Type, Size 4 Space Complete With Bus And Hardware	929.43	223.34
26 24 19 00-0698	EA	Fused Disconnect Type, Size 5 Space Complete With Bus And Hardware	1,293.50	324.86
26 24 19 00-0699		**Blank Space For Future Expansion** *(26 24 19 00-0686)*		
		Note: Factory modified no labor costs.		
26 24 19 00-0700	EA	Blank Space For Future Expansion, Size 1 Factory Modified, No Crew Costs	138.45	
26 24 19 00-0701	EA	Blank Space For Future Expansion, Size 2 Factory Modified, No Crew Costs	138.45	
26 24 19 00-0702	EA	Blank Space For Future Expansion, Size 3 Factory Modified, No Crew Costs	209.91	
26 24 19 00-0703	EA	Blank Space For Future Expansion, Size 4 Factory Modified, No Crew Costs	209.91	
26 24 19 00-0704	EA	Blank Space For Future Expansion, Size 5 Factory Modified, No Crew Costs	417.58	
26 24 19 00-0705		**Structure Combination Of Starters To 72" High** *(26 24 19 00-0686)*		
26 24 19 00-0706	EA	Structure Combination Of Starters To 72" High	3,438.03	593.67
26 24 19 00-0707		**Motor Control Center Basic Distribution Section** *(26 24 19 00-0483)*		
26 24 19 00-0708	EA	20" Wide Basic Section With Vertical Wireway	5,674.07	1,546.05
		For 20" Cabinet Depth, Add	*108.00*	
		For 800 Amperes, Tin Plated Copper Bus, Add	*182.00*	
		For 1,200 Amperes, Tin Plated Copper Bus, Add	*334.00*	
		For 1,600 Amperes, Tin Plated Copper Bus, Add	*402.00*	
		For 2,000 Amperes, Tin Plated Copper Bus, Add	*506.00*	
		For NEMA 1 With Gasket, Add	*97.00*	
		For NEMA 12, Add	*245.00*	
		For 600 Amperes, Tin Plated Copper Vertical, Add	*210.00*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 19 00-0709	EA	25" To 35" Wide Basic Section (No Vertical Wireway)	5,674.07	1,546.05
		For 20" Cabinet Depth, Add	*108.00*	
		For 800 Amperes, Tin Plated Copper Bus, Add	*182.00*	
		For 1,200 Amperes, Tin Plated Copper Bus, Add	*334.00*	
		For 1,600 Amperes, Tin Plated Copper Bus, Add	*402.00*	
		For 2,000 Amperes, Tin Plated Copper Bus, Add	*506.00*	
		For NEMA 1 With Gasket, Add	*97.00*	
		For NEMA 12, Add	*245.00*	
		For 600 Amperes, Tin Plated Copper Vertical, Add	*210.00*	
26 24 19 00-0710	EA	25" Wide Basic Section With 9" Wide Vertical Wireway	6,282.47	1,546.05
		For 20" Cabinet Depth, Add	*108.00*	
		For 800 Amperes, Tin Plated Copper Bus, Add	*182.00*	
		For 1,200 Amperes, Tin Plated Copper Bus, Add	*334.00*	
		For 1,600 Amperes, Tin Plated Copper Bus, Add	*402.00*	
		For 2,000 Amperes, Tin Plated Copper Bus, Add	*506.00*	
		For NEMA 1 With Gasket, Add	*97.00*	
		For NEMA 12, Add	*245.00*	
		For 600 Amperes, Tin Plated Copper Vertical, Add	*210.00*	
26 24 19 00-0711	EA	Corner Section	6,282.47	1,546.05
		For 20" Cabinet Depth, Add	*108.00*	
		For 800 Amperes, Tin Plated Copper Bus, Add	*182.00*	
		For 1,200 Amperes, Tin Plated Copper Bus, Add	*334.00*	
		For 1,600 Amperes, Tin Plated Copper Bus, Add	*402.00*	
		For 2,000 Amperes, Tin Plated Copper Bus, Add	*506.00*	
		For NEMA 1 With Gasket, Add	*97.00*	
		For NEMA 12, Add	*245.00*	
		For 600 Amperes, Tin Plated Copper Vertical, Add	*210.00*	

26 24 19 00-0712 Motor Control Center Starters With HMCP Circuit Breaker *(26 24 19 00-0483)*

Note: Includes door, unit support pan, heater elements, and NEMA 1 with gasket, or NEMA 12 enclosure. Line voltages of 208 V, 240 V, 480 V, and 600 V.

26 24 19 00-0713 FVNR Starters With HMCP Circuit Breaker *(26 24 19 00-0712)*

26 24 19 00-0714	EA	Class 1, Type A, Size 1 FVNR Starters With HMCP Circuit Breaker	1,492.88	217.14
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*130.28*	
26 24 19 00-0715	EA	Class 1, Type A, Size 2 FVNR Starters With HMCP Circuit Breaker	1,661.75	240.83
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*144.50*	
26 24 19 00-0716	EA	Class 1, Type A, Size 3 FVNR Starters With HMCP Circuit Breaker	2,891.42	323.74
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*194.26*	
26 24 19 00-0717	EA	Class 1, Type A, Size 4 FVNR Starters With HMCP Circuit Breaker	4,198.68	426.84
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*256.13*	
26 24 19 00-0718	EA	Class 1, Type A, Size 5 FVNR Starters With HMCP Circuit Breaker	9,620.76	533.43
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*320.09*	
26 24 19 00-0719	EA	Class 1, Type A, Size 6 FVNR Starters With HMCP Circuit Breaker	22,581.79	533.43
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*320.09*	
26 24 19 00-0720	EA	Class 1, Type B, Size 1 FVNR Starters With HMCP Circuit Breaker	1,510.73	187.82
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*112.68*	
26 24 19 00-0721	EA	Class 1, Type B, Size 2 FVNR Starters With HMCP Circuit Breaker	1,703.88	211.50
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*126.89*	
26 24 19 00-0722	EA	Class 1, Type B, Size 3 FVNR Starters With HMCP Circuit Breaker	2,960.97	288.77
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*173.25*	
26 24 19 00-0723	EA	Class 1, Type B, Size 4 FVNR Starters With HMCP Circuit Breaker	4,205.34	391.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*234.87*	
26 24 19 00-0724	EA	Class 1, Type B, Size 5 FVNR Starters With HMCP Circuit Breaker	9,642.07	505.34
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*303.23*	
26 24 19 00-0725	EA	Class 1, Type B, Size 6 FVNR Starters With HMCP Circuit Breaker	22,742.56	505.34
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*303.23*	

26 24 19 00-0726 Two Speed 2-Winding (TS2W) With HMCP Circuit Breaker *(26 24 19 00-0712)*

26 24 19 00-0727	EA	Class 1, Type A, Size 1 Two Speed 2-Winding (TS2W) With HMCP Circuit Breaker	2,399.56	271.74
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*163.01*	
26 24 19 00-0728	EA	Class 1, Type A, Size 2 Two Speed 2-Winding (TS2W) With HMCP Circuit Breaker	2,947.52	300.62
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*180.38*	
26 24 19 00-0729	EA	Class 1, Type A, Size 3 Two Speed 2-Winding (TS2W) With HMCP Circuit Breaker	4,867.81	404.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*242.41*	
26 24 19 00-0730	EA	Class 1, Type A, Size 4 Two Speed 2-Winding (TS2W) With HMCP Circuit Breaker	8,392.25	534.11
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*320.46*	
26 24 19 00-0731	EA	Class 1, Type A, Size 5 Two Speed 2-Winding (TS2W) With HMCP Circuit Breaker	15,189.10	668.23
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*400.95*	
26 24 19 00-0732	EA	Class 1, Type B, Size 1 Two Speed 2-Winding (TS2W) With HMCP Circuit Breaker	2,441.74	234.63
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*140.77*	
26 24 19 00-0733	EA	Class 1, Type B, Size 2 Two Speed 2-Winding (TS2W) With HMCP Circuit Breaker	3,014.89	264.52
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*158.72*	
26 24 19 00-0734	EA	Class 1, Type B, Size 3 Two Speed 2-Winding (TS2W) With HMCP Circuit Breaker	4,961.20	361.53
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*216.92*	
26 24 19 00-0735	EA	Class 1, Type B, Size 4 Two Speed 2-Winding (TS2W) With HMCP Circuit Breaker	8,419.53	489.55
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*293.75*	
26 24 19 00-0736	EA	Class 1, Type B, Size 5 Two Speed 2-Winding (TS2W) With HMCP Circuit Breaker	15,233.48	632.24
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*379.37*	

26 24 19 00-0737 Two Speed 1-Winding (TS1W) With HMCP Circuit Breaker *(26 24 19 00-0712)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 19 00-0738	EA	Class 1, Type A, Size 1 Two Speed 1-Winding (TS1W) With HMCP Circuit Breaker	2,632.17	271.74
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*163.01*	
26 24 19 00-0739	EA	Class 1, Type A, Size 2 Two Speed 1-Winding (TS1W) With HMCP Circuit Breaker	3,755.45	300.62
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*180.38*	
26 24 19 00-0740	EA	Class 1, Type A, Size 3 Two Speed 1-Winding (TS1W) With HMCP Circuit Breaker	7,105.50	404.05
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*242.41*	
26 24 19 00-0741	EA	Class 1, Type A, Size 4 Two Speed 1-Winding (TS1W) With HMCP Circuit Breaker	9,677.80	534.11
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*320.46*	
26 24 19 00-0742	EA	Class 1, Type A, Size 5 Two Speed 1-Winding (TS1W) With HMCP Circuit Breaker	19,445.83	668.23
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*400.95*	
26 24 19 00-0743	EA	Class 1, Type B, Size 1 Two Speed 1-Winding (TS1W) With HMCP Circuit Breaker	2,674.35	234.63
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*140.77*	
26 24 19 00-0744	EA	Class 1, Type B, Size 2 Two Speed 1-Winding (TS1W) With HMCP Circuit Breaker	3,822.81	264.52
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*158.72*	
26 24 19 00-0745	EA	Class 1, Type B, Size 3 Two Speed 1-Winding (TS1W) With HMCP Circuit Breaker	7,198.89	361.53
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*216.92*	
26 24 19 00-0746	EA	Class 1, Type B, Size 4 Two Speed 1-Winding (TS1W) With HMCP Circuit Breaker	9,705.08	489.55
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*293.75*	
26 24 19 00-0747	EA	Class 1, Type B, Size 5 Two Speed 1-Winding (TS1W) With HMCP Circuit Breaker	19,490.21	632.24
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*379.37*	

26 24 19 00-0748 Motor Control Center Starters With Fusible Disconnect *(26 24 19 00-0483)*

Note: Includes fuses, door, unit support pan, heater elements, and NEMA 1 with gasket, or NEMA 12 enclosure.
Line voltages of 208 V, 240 V, 480 V, and 600 V.

26 24 19 00-0749 FVNR Starters With Fusible Disconnect *(26 24 19 00-0748)*

26 24 19 00-0750	EA	Class 1, Type A, Size 1 FVNR Starters With Fusible Disconnect	1,200.34	211.72
26 24 19 00-0751	EA	Class 1, Type A, Size 2 FVNR Starters With Fusible Disconnect	1,563.32	287.75
26 24 19 00-0752	EA	Class 1, Type A, Size 3 FVNR Starters With Fusible Disconnect	2,618.62	374.95
26 24 19 00-0753	EA	Class 1, Type A, Size 4 FVNR Starters With Fusible Disconnect	4,427.45	528.14
26 24 19 00-0754	EA	Class 1, Type A, Size 5 FVNR Starters With Fusible Disconnect	8,939.85	671.39
26 24 19 00-0755	EA	Class 1, Type A, Size 6 FVNR Starters With Fusible Disconnect	22,778.48	671.39
26 24 19 00-0756	EA	Class 1, Type B, Size 1 FVNR Starters With Fusible Disconnect	1,227.88	187.70
26 24 19 00-0757	EA	Class 1, Type B, Size 2 FVNR Starters With Fusible Disconnect	1,604.16	257.75
26 24 19 00-0758	EA	Class 1, Type B, Size 3 FVNR Starters With Fusible Disconnect	2,699.36	345.62
26 24 19 00-0759	EA	Class 1, Type B, Size 4 FVNR Starters With Fusible Disconnect	4,448.81	500.05
26 24 19 00-0760	EA	Class 1, Type B, Size 5 FVNR Starters With Fusible Disconnect	8,944.79	635.18
26 24 19 00-0761	EA	Class 1, Type B, Size 6 FVNR Starters With Fusible Disconnect	22,923.00	635.18

26 24 19 00-0762 Two Speed 2-Winding (TS2W) With Fusible Disconnect *(26 24 19 00-0748)*

26 24 19 00-0763	EA	Class 1, Type A, Size 1 Two Speed 2-Winding (TS2W) With Fusible Disconnect	2,079.25	265.08
26 24 19 00-0764	EA	Class 1, Type A, Size 2 Two Speed 2-Winding (TS2W) With Fusible Disconnect	2,898.15	359.73
26 24 19 00-0765	EA	Class 1, Type A, Size 3 Two Speed 2-Winding (TS2W) With Fusible Disconnect	4,497.34	468.46
26 24 19 00-0766	EA	Class 1, Type A, Size 4 Two Speed 2-Winding (TS2W) With Fusible Disconnect	9,463.69	662.02
26 24 19 00-0767	EA	Class 1, Type A, Size 5 Two Speed 2-Winding (TS2W) With Fusible Disconnect	15,431.52	774.71
26 24 19 00-0768	EA	Class 1, Type B, Size 1 Two Speed 2-Winding (TS2W) With Fusible Disconnect	2,133.66	234.63
26 24 19 00-0769	EA	Class 1, Type B, Size 2 Two Speed 2-Winding (TS2W) With Fusible Disconnect	2,962.17	321.94
26 24 19 00-0770	EA	Class 1, Type B, Size 3 Two Speed 2-Winding (TS2W) With Fusible Disconnect	4,603.83	432.48
26 24 19 00-0771	EA	Class 1, Type B, Size 4 Two Speed 2-Winding (TS2W) With Fusible Disconnect	9,503.84	623.90
26 24 19 00-0772	EA	Class 1, Type B, Size 5 Two Speed 2-Winding (TS2W) With Fusible Disconnect	15,459.51	730.61

26 24 19 00-0773 Two Speed 1-Winding (TS1W) With Fusible Disconnect *(26 24 19 00-0748)*

26 24 19 00-0774	EA	Class 1, Type A, Size 1 Two Speed 1-Winding (TS1W) With Fusible Disconnect	2,429.71	265.08
26 24 19 00-0775	EA	Class 1, Type A, Size 2 Two Speed 1-Winding (TS1W) With Fusible Disconnect	3,718.49	359.73
26 24 19 00-0776	EA	Class 1, Type A, Size 3 Two Speed 1-Winding (TS1W) With Fusible Disconnect	6,758.29	468.46
26 24 19 00-0777	EA	Class 1, Type A, Size 4 Two Speed 1-Winding (TS1W) With Fusible Disconnect	9,935.11	662.02
26 24 19 00-0778	EA	Class 1, Type A, Size 5 Two Speed 1-Winding (TS1W) With Fusible Disconnect	18,822.95	774.71
26 24 19 00-0779	EA	Class 1, Type B, Size 1 Two Speed 1-Winding (TS1W) With Fusible Disconnect	2,485.16	234.63
26 24 19 00-0780	EA	Class 1, Type B, Size 2 Two Speed 1-Winding (TS1W) With Fusible Disconnect	3,782.50	321.94
26 24 19 00-0781	EA	Class 1, Type B, Size 3 Two Speed 1-Winding (TS1W) With Fusible Disconnect	6,864.78	432.48
26 24 19 00-0782	EA	Class 1, Type B, Size 4 Two Speed 1-Winding (TS1W) With Fusible Disconnect	9,975.26	623.90
26 24 19 00-0783	EA	Class 1, Type B, Size 5 Two Speed 1-Winding (TS1W) With Fusible Disconnect	18,850.94	730.61

26 24 19 00-0784 Tin Plated Copper Bus Bar And Ground Bus Bar Splice Kit *(26 24 19 00-0483)*

Note: Per section. Labor is included in basic distribution section.

26 24 19 00-0785	EA	600 Amperes, Horizontal Tin Plated Copper Bus Kit	263.96	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.48*	
26 24 19 00-0786	EA	800 Amperes, Horizontal Tin Plated Copper Bus Kit	323.92	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.48*	
26 24 19 00-0787	EA	1,200 Amperes, Horizontal Tin Plated Copper Bus Kit	389.53	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.17*	
26 24 19 00-0788	EA	1,600 Amperes, Horizontal Tin Plated Copper Bus Kit	507.39	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.17*	
26 24 19 00-0789	EA	2,000 Amperes, Horizontal Tin Plated Copper Bus Kit	852.13	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.87*	
26 24 19 00-0790	EA	1/4" x 2" Horizontal Tin Plated Copper Ground Bus Kit	150.79	
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.78*	

copyright 2026 The Gordian Group, Inc.

CSI	MINOR UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 19 00-0791		**Disconnect (Safety) Switch For Motor Control Centers** *(26 24 19 00-0483)*		
26 24 19 00-0792		**3 Pole Circuit Breaker Disconnect For Motor Control Center** *(26 24 19 00-0791)* Note: Includes door, unit support pan, inverse time (Thermal Magnetic) circuit breaker, and NEMA 1, NEMA 1 with gasket, or NEMA 12 enclosure. Class 1 type A (no starters).		
26 24 19 00-0793	EA	150 Amperes Rating, 15 To 100 Amperes Trip Range, 3 Pole Circuit Breaker Disconnect	1,440.62	163.00
26 24 19 00-0794	EA	150 Amperes Rating, 125 To 150 Amperes Trip Range, 3 Pole Circuit Breaker Disconnect	2,711.36	180.48
26 24 19 00-0795	EA	225 Amperes Rating, 70 To 225 Amperes Trip Range, 3 Pole Circuit Breaker Disconnect	3,266.18	243.09
26 24 19 00-0796	EA	400 Amperes Rating, 125 To 400 Amperes Trip Range, 3 Pole Circuit Breaker Disconnect	5,570.39	320.35
26 24 19 00-0797	EA	600 Amperes Rating, 300 To 600 Amperes Trip Range, 3 Pole Circuit Breaker Disconnect	9,902.16	400.44
26 24 19 00-0798	EA	800 Amperes Rating, 400 To 800 Amperes Trip Range, 3 Pole Circuit Breaker Disconnect	11,398.30	400.44
26 24 19 00-0799	EA	1,200 Amperes Rating, 600 To 1,200 Amperes Trip Range, 3 Pole Circuit Breaker Disconnect	24,070.27	501.40
26 24 19 00-0800		**Fusible Disconnect (Safety) Switch For Motor Control Center** *(26 24 19 00-0791)* Note: Includes door, unit support pan, fuses and NEMA 1, NEMA 1 with gasket, or NEMA 12 enclosure. Class 1 type A (no starters).		
26 24 19 00-0801	EA	30 Amperes Switch Rating, Fusible Disconnect Switch With 30 Amperes Fuse Clips	828.70	158.49
26 24 19 00-0802	EA	60 Amperes Switch Rating, Fusible Disconnect Switch With 60 Amperes Fuse Clips	974.81	216.01
26 24 19 00-0803	EA	100 Amperes Switch Rating, Fusible Disconnect Switch With 100 Amperes Fuse Clips	1,337.39	276.36
26 24 19 00-0804	EA	200 Amperes Switch Rating, Fusible Disconnect Switch With 200 Amperes Fuse Clips	2,502.36	395.93
26 24 19 00-0805	EA	400 Amperes Switch Rating, Fusible Disconnect Switch With 400 Amperes Fuse Clips	4,460.61	503.54
26 24 19 00-0806	EA	600 Amperes Switch Rating, Fusible Disconnect Switch With 600 Amperes Fuse Clips	10,291.32	503.54
26 24 19 00-0807	EA	800 Amperes Switch Rating, Fusible Disconnect Switch With 800 Amperes Fuse Clips	12,721.86	629.43
26 24 19 00-0808	EA	1,200 Amperes Switch Rating, Fusible Disconnect Switch With 1,200 Amperes Fuse Clips	18,825.50	629.43
26 24 19 00-0809		**Control Circuit Transformer** *(26 24 19 00-0483)*		
26 24 19 00-0810	EA	Control Circuit Transformer, Size 1 Factory Installed	73.86	
26 24 19 00-0811	EA	Control Circuit Transformer, Size 2 Factory Installed	73.86	
26 24 19 00-0812	EA	Control Circuit Transformer, Size 3 Factory Installed	142.25	
26 24 19 00-0813	EA	Control Circuit Transformer, Size 4 Factory Installed	142.25	
26 24 19 00-0814	EA	Control Circuit Transformer, Size 5 Factory Installed	197.62	
26 24 19 00-0815	EA	Control Circuit Fuse And Holder Small Dim, Dual Element Time Delay	53.58	12.77
26 24 19 00-0816		**Cover Mounted Control Devices** *(26 24 19 00-0483)*		
26 24 19 00-0817	EA	Control Device, 2 Unit Push Button Station Cover Mounted	120.86	22.56
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.10*	
26 24 19 00-0818	EA	Control Device, 2-3 Unit Selector Switch Cover Mounted	135.35	22.56
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*17.63*	
26 24 19 00-0819	EA	Control Device, Pilot Light Cover Mounted	114.53	22.56
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.56*	
26 24 19 00-0820	EA	Control Device, Hand-Off-Auto Switch Cover Mounted With Pilot Light	307.29	76.70
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*46.23*	
26 24 19 00-0821	EA	Auxiliary Contact Add Per Starter	376.41	29.22
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*17.54*	
26 24 19 00-0822		**Extra Interlocks** *(26 24 19 00-0483)* Note: Per contact.		
26 24 19 00-0823	EA	Extra Interlocks, Class I, Type A Per Contact	78.44	14.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.56*	
26 24 19 00-0824	EA	Extra Interlocks, Class I, Type B Per Contact	109.31	14.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.56*	
26 24 19 00-0825	EA	Extra Interlocks, Class I, Type C Per Contact	122.01	14.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.81*	
26 24 19 00-0826	EA	Extra Interlocks, Class II, Type B Per Contact	109.95	14.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.05*	
26 24 19 00-0827	EA	Extra Interlocks, Class II, Type C Per Contact	116.54	14.66
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.32*	
26 24 19 00-0828		**Special Cabinet Provisions** *(26 24 19 00-0483)*		
26 24 19 00-0829	EA	Provisions For Bus Duct Entrance Special Cabinet Provisions	924.64	
26 24 19 00-0830		**Nameplate Requirements** *(26 24 19 00-0483)*		
26 24 19 00-0831	EA	Special Cabinet Nameplate Requirements	32.83	
26 24 19 00-0832		**Auxiliary Relays** *(26 24 19 00-0483)*		
26 24 19 00-0833	EA	Industrial Control Relay, 10 Amperes, Class A600 With 2 Contacts	178.08	28.25
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.95*	
26 24 19 00-0834	EA	Timing Relay, Solid State, DPDT 0.1-10 Sec Variable, Off-Delay	168.20	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.95*	
26 24 19 00-0835	EA	General Purpose Control Relay, 240 Volt AC, 10 Amperes, With Base	94.49	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.95*	
26 24 19 00-0836		**Motor Control Center Accessories** *(26 24 19 00-0483)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 24 19 00-0837		**Lighting Transformer With Circuit Breaker** *(26 24 19 00-0836)* Note: For 240 V, 480 V, or 600 V primary. Includes door, unit support pan, and NEMA 1, NEMA 1 with gasket, or NEMA 12 enclosure for MCC only.		
26 24 19 00-0838	EA	1 Phase, 5 KVA, 120/240 Volt Secondary Lighting Transformer With Circuit Breaker	5,325.11	362.93
26 24 19 00-0839	EA	1 Phase, 7.5 KVA, 120/240 Volt Secondary Lighting Transformer With Circuit Breaker	5,536.52	377.45
26 24 19 00-0840	EA	1 Phase, 10 KVA, 120/240 Volt Secondary Lighting Transformer With Circuit Breaker	6,058.12	406.49
26 24 19 00-0841	EA	1 Phase, 15 KVA, 120/240 Volt Secondary Lighting Transformer With Circuit Breaker	7,621.41	435.51
26 24 19 00-0842	EA	1 Phase, 25 KVA, 120/240 Volt Secondary Lighting Transformer With Circuit Breaker	10,256.78	464.55
26 24 19 00-0843	EA	1 Phase, 37.5 KVA, 120/240 Volt Secondary Lighting Transformer With Circuit Breaker	12,603.21	522.62
26 24 19 00-0844	EA	1 Phase, 50 KVA, 120/240 Volt Secondary Lighting Transformer With Circuit Breaker	16,568.21	580.69
26 24 19 00-0845	EA	3 Phase, 10 KVA, 120/208 Volt Secondary Lighting Transformer With Circuit Breaker	9,666.50	479.07
26 24 19 00-0846	EA	3 Phase, 15 KVA, 120/208 Volt Secondary Lighting Transformer With Circuit Breaker	10,502.00	522.62
26 24 19 00-0847	EA	3 Phase, 25 KVA, 120/208 Volt Secondary Lighting Transformer With Circuit Breaker	12,012.65	580.69
26 24 19 00-0848	EA	3 Phase, 30 KVA, 120/208 Volt Secondary Lighting Transformer With Circuit Breaker	12,742.39	638.75
26 24 19 00-0849	EA	3 Phase, 37.5 KVA, 120/208 Volt Secondary Lighting Transformer With Circuit Breaker	15,379.48	696.83
26 24 19 00-0850	EA	3 Phase, 45 KVA, 120/208 Volt Secondary Lighting Transformer With Circuit Breaker	15,866.07	754.89
26 24 19 00-0851		**Bolt-On Lighting Panel** *(26 24 19 00-0836)* Note: Includes door, T-handle, unit support pan, neutral bar (10 KA IC RMS), and NEMA 1, NEMA 1 with gasket, or NEMA 12 enclosure. For MCC only.		
26 24 19 00-0852	EA	18 Circuit Bolt-On Lighting Panel, MLO, 1 Phase, 3 Wire, 120/240 Volt	2,177.08	587.02
26 24 19 00-0853	EA	30 Circuit Bolt-On Lighting Panel, MLO, 1 Phase, 3 Wire, 120/240 Volt	3,377.10	1,021.75
26 24 19 00-0854	EA	42 Circuit Bolt-On Lighting Panel, MLO, 1 Phase, 3 Wire, 120/240 Volt	4,483.98	1,382.37
26 24 19 00-0855	EA	18 Circuit Bolt-On Lighting Panel, MLO, 3 Phase, 4 Wire, 120/208 Volt	2,273.33	635.18
26 24 19 00-0856	EA	30 Circuit Bolt-On Lighting Panel, MLO, 3 Phase, 4 Wire, 120/208 Volt	3,333.62	999.98
26 24 19 00-0857	EA	42 Circuit Bolt-On Lighting Panel, MLO, 3 Phase, 4 Wire, 120/208 Volt	4,656.78	1,468.77
26 24 19 00-0858	EA	18 Circuit Bolt-On Lighting Panel, MCB, 1 Phase, 3 Wire, 120/240 Volt	3,724.94	680.86
26 24 19 00-0859	EA	30 Circuit Bolt-On Lighting Panel, MCB, 1 Phase, 3 Wire, 120/240 Volt	4,929.27	1,093.04
26 24 19 00-0860	EA	42 Circuit Bolt-On Lighting Panel, MCB, 1 Phase, 3 Wire, 120/240 Volt	6,142.37	1,468.77
26 24 19 00-0861	EA	18 Circuit Bolt-On Lighting Panel, MCB, 3 Phase, 4 Wire, 120/208 Volt	3,832.02	734.33
26 24 19 00-0862	EA	30 Circuit Bolt-On Lighting Panel, MCB, 3 Phase, 4 Wire, 120/208 Volt	4,929.27	1,093.04
26 24 19 00-0863	EA	42 Circuit Bolt-On Lighting Panel, MCB, 3 Phase, 4 Wire, 120/208 Volt	6,237.12	1,516.16
26 24 19 00-0864		**Factory Installed Bolt-On Branch Circuit Breaker** *(26 24 19 00-0836)* Note: For MCC lighting panel only.		
26 24 19 00-0865	EA	15 To 30 Amperes,1 Pole, Bolt-On Branch Circuit Breaker	44.70	
26 24 19 00-0866	EA	15 To 30 Amperes, 1 Pole (GFI) Bolt-On Branch Circuit Breaker	284.96	
26 24 19 00-0867	EA	15 To 50 Amperes, 2 Pole, Bolt-On Branch Circuit Breaker	87.38	
26 24 19 00-0868	EA	60 To 100 Amperes, 2 Pole, Bolt-On Branch Circuit Breaker	201.17	
26 24 19 00-0869	EA	15 To 50 Amperes, 3 Pole, Bolt-On Branch Circuit Breaker	235.71	
26 24 19 00-0870	EA	60 To 100 Amperes, 3 Pole, Bolt-On Branch Circuit Breaker	357.63	
26 24 19 00-0871		**Blank Unit Door (BUD)** *(26 24 19 00-0836)* Note: With NEMA 1, NEMA 1 with gasket, or NEMA 12 enclosure. Factory installed.		
26 24 19 00-0872	EA	6" High Blank Unit Door (BUD) With NEMA 1, NEMA 1 With Gasket, Or NEMA 12 Enclosure	75.99	
26 24 19 00-0873	EA	12" High Blank Unit Door (BUD) With NEMA 1, NEMA 1 With Gasket, Or NEMA 12 Enclosure	91.19	
26 24 19 00-0874	EA	18" High Blank Unit Door (BUD) With NEMA 1, NEMA 1 With Gasket, Or NEMA 12 Enclosure	136.78	
26 24 19 00-0875	EA	24" High Blank Unit Door (BUD) With NEMA 1, NEMA 1 With Gasket, Or NEMA 12 Enclosure	182.37	
26 24 19 00-0876	EA	30" High Blank Unit Door (BUD) With NEMA 1, NEMA 1 With Gasket, Or NEMA 12 Enclosure	273.56	
26 24 19 00-0877	EA	48" High Blank Unit Door (BUD) With NEMA 1, NEMA 1 With Gasket, Or NEMA 12 Enclosure	319.16	
26 24 19 00-0878	EA	72" High Blank Unit Door (BUD) With NEMA 1, NEMA 1 With Gasket, Or NEMA 12 Enclosure	364.75	

26 25 Enclosed Bus Assemblies *(26 20)*

26 25 13 Low-Voltage Busways *(26 25)*

26 25 13 00-0001		**Plug-In Bus Duct** *(26 25 13)* Note: Based on an average of 100' horizontal run with a 15' maximum mounting height. Each 100' of bus duct includes 2 elbows, 1 end cap, and switchboard stub. Excludes hangers with anchors and hardware support.		
26 25 13 00-0002		**600 Volt, 3-Phase, 3-Wire, Copper Conductors** *(26 25 13 00-0001)*		
26 25 13 00-0003	LF	225 Amperes, Bus Duct 600 Volt, 3 Phase, 3 Wire Copper Conductors	289.21	33.84
		For Up To 25, Add	*72.30*	
		For >25 To 50, Add	*43.38*	
		For >50 To 100, Add	*21.69*	
26 25 13 00-0004	LF	400 Amperes, Bus Duct 600 Volt, 3 Phase, 3 Wire Copper Conductors	410.06	33.84
		For Up To 25, Add	*102.52*	
		For >25 To 50, Add	*61.51*	
		For >50 To 100, Add	*30.75*	
26 25 13 00-0005	LF	600 Amperes, Bus Duct 600 Volt, 3 Phase, 3 Wire Copper Conductors	519.76	45.12
		For Up To 25, Add	*129.94*	
		For >25 To 50, Add	*77.96*	
		For >50 To 100, Add	*38.98*	
26 25 13 00-0006	LF	800 Amperes, Bus Duct 600 Volt, 3 Phase, 3 Wire Copper Conductors	718.21	45.12
		For Up To 25, Add	*179.55*	
		For >25 To 50, Add	*107.73*	
		For >50 To 100, Add	*53.87*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 25 13 00-0007	LF	1,000 Amperes, Bus Duct 600 Volt, 3 Phase, 3 Wire Copper Conductors	757.64	56.40
		For Up To 25, Add	*189.41*	
		For >25 To 50, Add	*113.65*	
		For >50 To 100, Add	*56.82*	
26 25 13 00-0008	LF	1,350 Amperes, Bus Duct 600 Volt, 3 Phase, 3 Wire Copper Conductors	1,056.08	56.40
		For Up To 25, Add	*264.02*	
		For >25 To 50, Add	*158.41*	
		For >50 To 100, Add	*79.21*	
26 25 13 00-0009	LF	1,600 Amperes, Bus Duct 600 Volt, 3 Phase, 3 Wire Copper Conductors	1,236.23	59.22
		For Up To 25, Add	*309.06*	
		For >25 To 50, Add	*185.43*	
		For >50 To 100, Add	*92.72*	
26 25 13 00-0010	LF	2,000 Amperes Bus Duct 600 Volt, 3 Phase, 3 Wire Copper Conductors	1,505.59	60.91
		For Up To 25, Add	*376.40*	
		For >25 To 50, Add	*225.84*	
		For >50 To 100, Add	*112.92*	
26 25 13 00-0011	LF	2,500 Amperes Bus Duct 600 Volt, 3 Phase, 3 Wire Copper Conductors	1,858.47	64.29
		For Up To 25, Add	*464.62*	
		For >25 To 50, Add	*278.77*	
		For >50 To 100, Add	*139.39*	
26 25 13 00-0012	LF	3,000 Amperes Bus Duct 600 Volt, 3 Phase, 3 Wire Copper Conductors	2,145.87	75.01
		For Up To 25, Add	*536.47*	
		For >25 To 50, Add	*321.88*	
		For >50 To 100, Add	*160.94*	
26 25 13 00-0013	LF	4,000 Amperes Bus Duct 600 Volt, 3 Phase, 3 Wire Copper Conductors	2,483.50	81.78
		For Up To 25, Add	*620.88*	
		For >25 To 50, Add	*372.53*	
		For >50 To 100, Add	*186.26*	
26 25 13 00-0014		277/480 Volt, 3-Phase, 4-Wire, 100% Neutral, Copper Conductors *(26 25 13 00-0001)*		
26 25 13 00-0015	LF	225 Amperes Bus Duct 277/480 Volt, 3 Phase, 4 Wire Copper Conductors	474.50	33.84
		For Up To 25, Add	*118.63*	
		For >25 To 50, Add	*71.18*	
		For >50 To 100, Add	*35.59*	
26 25 13 00-0016	LF	400 Amperes Bus Duct 277/480 Volt, 3 Phase, 4 Wire Copper Conductors	685.46	33.84
		For Up To 25, Add	*171.37*	
		For >25 To 50, Add	*102.82*	
		For >50 To 100, Add	*51.41*	
26 25 13 00-0017	LF	600 Amperes Bus Duct 277/480 Volt, 3 Phase, 4 Wire Copper Conductors	775.04	45.12
		For Up To 25, Add	*193.76*	
		For >25 To 50, Add	*116.26*	
		For >50 To 100, Add	*58.13*	
26 25 13 00-0018	LF	800 Amperes Bus Duct 277/480 Volt, 3 Phase, 4 Wire Copper Conductors	985.70	45.12
		For Up To 25, Add	*246.43*	
		For >25 To 50, Add	*147.86*	
		For >50 To 100, Add	*73.93*	
26 25 13 00-0019	LF	1,000 Amperes Bus Duct 277/480 Volt, 3 Phase, 4 Wire Copper Conductors	1,202.73	56.40
		For Up To 25, Add	*300.68*	
		For >25 To 50, Add	*180.41*	
		For >50 To 100, Add	*90.20*	
26 25 13 00-0020	LF	1,350 Amperes Bus Duct 277/480 Volt, 3 Phase, 4 Wire Copper Conductors	1,558.87	56.40
		For Up To 25, Add	*389.72*	
		For >25 To 50, Add	*233.83*	
		For >50 To 100, Add	*116.92*	
26 25 13 00-0021	LF	1,600 Amperes Bus Duct 277/480 Volt, 3 Phase, 4 Wire Copper Conductors	2,015.75	58.43
		For Up To 25, Add	*503.94*	
		For >25 To 50, Add	*302.36*	
		For >50 To 100, Add	*151.18*	
26 25 13 00-0022	LF	2,000 Amperes Bus Duct 277/480 Volt, 3 Phase, 4 Wire Copper Conductors	2,428.05	60.91
		For Up To 25, Add	*607.01*	
		For >25 To 50, Add	*364.21*	
		For >50 To 100, Add	*182.10*	
26 25 13 00-0023	LF	2,500 Amperes Bus Duct 277/480 Volt, 3 Phase, 4 Wire Copper Conductors	3,011.65	63.73
		For Up To 25, Add	*752.91*	
		For >25 To 50, Add	*451.75*	
		For >50 To 100, Add	*225.87*	
26 25 13 00-0024	LF	3,000 Amperes Bus Duct 277/480 Volt, 3 Phase, 4 Wire Copper Conductors	3,476.50	75.01
		For Up To 25, Add	*869.13*	
		For >25 To 50, Add	*521.48*	
		For >50 To 100, Add	*260.74*	
26 25 13 00-0025	LF	4,000 Amperes Bus Duct 277/480 Volt, 3 Phase, 4 Wire Copper Conductors	4,030.11	81.78
		For Up To 25, Add	*1,007.53*	
		For >25 To 50, Add	*604.52*	
		For >50 To 100, Add	*302.26*	
26 25 13 00-0026		Cable Tap Boxes *(26 25 13 00-0001)*		
26 25 13 00-0027		600 Volt, 3-Phase, 3-Wire, Copper Conductors *(26 25 13 00-0026)*		
26 25 13 00-0028	EA	225 Amperes Cable Tap Box, 600 Volt, 3 Phase, 3 Wire	2,386.19	157.93
26 25 13 00-0029	EA	400 Amperes Cable Tap Box, 600 Volt, 3 Phase, 3 Wire	2,462.64	157.93
26 25 13 00-0030	EA	600 Amperes Cable Tap Box, 600 Volt, 3 Phase, 3 Wire	2,660.16	214.32
26 25 13 00-0031	EA	800 Amperes Cable Tap Box, 600 Volt, 3 Phase, 3 Wire	2,828.53	214.32
26 25 13 00-0032	EA	1,000 Amperes Cable Tap Box, 600 Volt, 3 Phase, 3 Wire	3,031.77	282.00

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 25 13 00-0033	EA	1,350 Amperes Cable Tap Box, 600 Volt, 3 Phase, 3 Wire	3,320.98	282.00
26 25 13 00-0034		**277/480 Volt, 3-Phase, 4-Wire, 100% Neutral, Copper Conductors** *(26 25 13 00-0026)*		
26 25 13 00-0035	EA	225 Amperes Cable Tap Box 277/480 Volt, 3 Phase, 4 Wire	2,462.64	310.20
26 25 13 00-0036	EA	400 Amperes Cable Tap Box 277/480 Volt, 3 Phase, 4 Wire	2,673.10	310.20
26 25 13 00-0037	EA	600 Amperes Cable Tap Box 277/480 Volt, 3 Phase, 4 Wire	2,853.27	423.01
26 25 13 00-0038	EA	800 Amperes Cable Tap Box 277/480 Volt, 3 Phase, 4 Wire	3,205.64	423.01
26 25 13 00-0039	EA	1,000 Amperes Cable Tap Box 277/480 Volt, 3 Phase, 4 Wire	3,368.61	564.00
26 25 13 00-0040	EA	1,350 Amperes Cable Tap Box 277/480 Volt, 3 Phase, 4 Wire	3,833.33	564.00
26 25 13 00-0041		**Bus Duct Plug-In Circuit Breaker** *(26 25 13 00-0001)*		
26 25 13 00-0042		**240 Volt, 3-Phase** *(26 25 13 00-0041)*		
26 25 13 00-0043	EA	60 Amperes, 240 Volt, 3 Phase, Bus Duct Plug-In Circuit Breaker	1,070.48	112.80
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.71*	
26 25 13 00-0044	EA	100 Amperes, 240 Volt, 3 Phase, Bus Duct Plug-In Circuit Breaker	2,138.78	112.80
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*79.22*	
26 25 13 00-0045		**600 Volt, 3-Phase** *(26 25 13 00-0041)*		
26 25 13 00-0046	EA	60 Amperes, 600 Volt, 3 Phase, Bus Duct Plug-in Circuit Breaker	2,080.42	112.80
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*61.71*	
26 25 13 00-0047	EA	100 Amperes, 600 Volt, 3 Phase, Bus Duct Plug-in Circuit Breaker	2,694.79	112.80
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*79.22*	
26 25 13 00-0048		**120/208 Volt, 3-Phase, 4-Wire** *(26 25 13 00-0041)*		
26 25 13 00-0049	EA	60 Amperes, 120/208 Volt, 3 Phase, 4 Wire, Bus Duct Plug-in Circuit Breaker	1,232.84	135.36
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*70.50*	
26 25 13 00-0050	EA	100 Amperes, 120/208 Volt, 3 Phase, 4 Wire, Bus Duct Plug-in Circuit Breaker	1,471.99	135.36
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*88.13*	
26 25 13 00-0051		**277/480 Volt, 3-Phase, 4-Wire** *(26 25 13 00-0041)*		
26 25 13 00-0052	EA	60 Amperes, 277/480 Volt, 3 Phase, 4 Wire, Bus Duct Plug-In Circuit Breaker	1,413.24	135.36
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*70.50*	
26 25 13 00-0053	EA	100 Amperes, 277/480 Volt, 3 Phase, 4 Wire, Bus Duct Plug-In Circuit Breaker	2,178.40	135.36
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*88.13*	
26 25 13 00-0054	EA	225 Amperes, 277/480 Volt, 3 Phase, 4 Wire, Bus Duct Plug-In Circuit Breaker	3,166.87	468.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*202.88*	
26 25 13 00-0055	EA	400 Amperes, 277/480 Volt, 3 Phase, 4 Wire, Bus Duct Plug-In Circuit Breaker	7,567.54	468.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*440.63*	
26 25 13 00-0056	EA	600 Amperes, 277/480 Volt, 3 Phase, 4 Wire, Bus Duct Plug-In Circuit Breaker	8,429.66	1,353.61
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*613.05*	
26 25 13 00-0057	EA	800 Amperes, 277/480 Volt, 3 Phase, 4 Wire, Bus Duct Plug-In Circuit Breaker	10,480.53	1,353.61
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*1,084.62*	
26 25 13 00-0058		**Bus Duct Plug-In Fusible Switch** *(26 25 13 00-0001)*		
26 25 13 00-0059		**240 Volt, 3-Pole, 3-Fuse** *(26 25 13 00-0058)*		
26 25 13 00-0060	EA	30 Amperes, 240 Volt, 3 Phase, 3 Fuses, Bus Duct Plug-in Fusible Switch	1,068.00	112.80
26 25 13 00-0061	EA	60 Amperes, 240 Volt, 3 Phase, 3 Fuses, Bus Duct Plug-in Fusible Switch	1,171.26	112.80
26 25 13 00-0062	EA	100 Amperes, 240 Volt, 3 Phase, 3 Fuses, Bus Duct Plug-in Fusible Switch	1,621.03	135.36
26 25 13 00-0063	EA	200 Amperes, 240 Volt, 3 Phase, 3 Fuses, Bus Duct Plug-in Fusible Switch	2,733.65	270.72
26 25 13 00-0064	EA	400 Amperes, 240 Volt, 3 Phase, 3 Fuses, Bus Duct Plug-in Fusible Switch	6,921.31	609.12
26 25 13 00-0065	EA	600 Amperes, 240 Volt, 3 Phase, 3 Fuses, Bus Duct Plug-in Fusible Switch	10,320.95	1,060.32
26 25 13 00-0066		**600 Volt, 3-Pole, 3-Fuse** *(26 25 13 00-0058)*		
26 25 13 00-0067	EA	30 Amperes, 600 Volt, 3 Phase, 3 Fuses, Bus Duct Plug-in Fusible Switch	1,112.54	124.09
26 25 13 00-0068	EA	60 Amperes, 600 Volt, 3 Phase, 3 Fuses, Bus Duct Plug-in Fusible Switch	1,213.08	124.09
26 25 13 00-0069	EA	100 Amperes, 600 Volt, 3 Phase, 3 Fuses, Bus Duct Plug-in Fusible Switch	1,636.12	124.09
26 25 13 00-0070	EA	200 Amperes, 600 Volt, 3 Phase, 3 Fuses, Bus Duct Plug-in Fusible Switch	2,803.90	259.44
26 25 13 00-0071	EA	400 Amperes, 600 Volt, 3 Phase, 3 Fuses, Bus Duct Plug-in Fusible Switch	6,891.18	586.57
26 25 13 00-0072	EA	600 Amperes, 600 Volt, 3 Phase, 3 Fuses, Bus Duct Plug-in Fusible Switch	10,534.59	1,128.00
26 25 13 00-0073	EA	800 Amperes, 600 Volt, 3 Phase, 3 Fuses, Bus Duct Plug-in Fusible Switch	17,342.26	1,466.41
26 25 13 00-0074		**120/208 Volt, 4-pole, 3 Fuse** *(26 25 13 00-0058)*		
26 25 13 00-0075	EA	30 Amperes, 120/208 Volt, 4 Phase, 3 Fuses, Bus Duct Plug-in Fusible Switch	1,236.78	146.64
26 25 13 00-0076	EA	60 Amperes, 120/208 Volt, 4 Phase, 3 Fuses, Bus Duct Plug-in Fusible Switch	1,325.47	146.64
26 25 13 00-0077	EA	100 Amperes, 120/208 Volt, 4 Phase, 3 Fuses, Bus Duct Plug-in Fusible Switch	1,792.45	146.64
26 25 13 00-0078	EA	200 Amperes, 120/208 Volt, 4 Phase, 3 Fuses, Bus Duct Plug-in Fusible Switch	3,039.42	304.56
26 25 13 00-0079	EA	400 Amperes, 120/208 Volt, 4 Phase, 3 Fuses, Bus Duct Plug-in Fusible Switch	7,590.43	676.80
26 25 13 00-0080	EA	600 AAmperes, 120/208 Volt, 4 Phase, 3 Fuses, Bus Duct Plug-in Fusible Switch	11,040.97	1,037.77
26 25 13 00-0081		**277/480 Volt, 4-pole, 3-Fuse** *(26 25 13 00-0058)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 25 13 00-0082	EA	30 Amperes, 277/480 Volt, 4 Phase, 3 Fuses, Bus Duct Plug-in Fusible Switch	1,278.27	146.64
26 25 13 00-0083	EA	60 Amperes, 277/480 Volt, 4 Phase, 3 Fuses, Bus Duct Plug-in Fusible Switch	1,366.96	124.42
26 25 13 00-0084	EA	100 Amperes, 277/480 Volt, 4 Phase, 3 Fuses, Bus Duct Plug-in Fusible Switch	1,913.94	169.20
26 25 13 00-0085	EA	200 Amperes, 277/480 Volt, 4 Phase, 3 Fuses, Bus Duct Plug-in Fusible Switch	3,169.16	304.56
26 25 13 00-0086	EA	400 Amperes, 277/480 Volt, 4 Phase, 3 Fuses, Bus Duct Plug-in Fusible Switch	7,590.43	676.80
26 25 13 00-0087	EA	600 Amperes, 277/480 Volt, 4 Phase, 3 Fuses, Bus Duct Plug-in Fusible Switch	11,040.97	1,037.77
26 25 13 00-0088	EA	800 Amperes, 277/480 Volt, 4 Phase, 3 Fuses, Bus Duct Plug-in Fusible Switch	17,527.78	1,376.16

26 25 16 Low-Voltage Cablebus Systems *(26 25)*

26 25 16 00-0001 Feeder Bus Duct *(26 25 16)*

Note: Based on an average of 100' horizontal run with a 15' maximum mounting height. Each 100' of bus duct includes 2 elbows, 1 end cap, and switchboard stub. Excludes hangers with anchors and hardware support.

26 25 16 00-0002 600 Volt, 3 Phase, 3 Wire, Ventilated Low Impedance *(26 25 16 00-0001)*

Note: Copper conductors.

26 25 16 00-0003	LF	800 Amperes, 600 Volt, 3 Phase, 3 Wire Copper Conductors, Bus Duct With Supports	864.02	47.37
		For Up To 25, Add	*216.01*	
		For >25 To 50, Add	*129.60*	
		For >50 To 100, Add	*64.80*	
26 25 16 00-0004	LF	1,000 Amperes, 600 Volt, 3 Phase, 3 Wire Copper Conductors, Bus Duct With Supports	875.38	47.37
		For Up To 25, Add	*218.85*	
		For >25 To 50, Add	*131.31*	
		For >50 To 100, Add	*65.65*	
26 25 16 00-0005	LF	1,350 Amperes, 600 Volt, 3 Phase, 3 Wire Copper Conductors, Bus Duct With Supports	1,146.99	47.37
		For Up To 25, Add	*286.75*	
		For >25 To 50, Add	*172.05*	
		For >50 To 100, Add	*86.02*	
26 25 16 00-0006	LF	1,600 Amperes, 600 Volt, 3 Phase, 3 Wire Copper Conductors, Bus Duct With Supports	1,378.37	47.37
		For Up To 25, Add	*344.59*	
		For >25 To 50, Add	*206.76*	
		For >50 To 100, Add	*103.38*	
26 25 16 00-0007	LF	2,000 Amperes, 600 Volt, 3 Phase, 3 Wire Copper Conductors, Bus Duct With Supports	1,685.31	47.37
		For Up To 25, Add	*421.33*	
		For >25 To 50, Add	*252.80*	
		For >50 To 100, Add	*126.40*	
26 25 16 00-0008	LF	3,000 Amperes, 600 Volt, 3 Phase, 3 Wire Copper Conductors, Bus Duct With Supports	2,299.46	112.80
		For Up To 25, Add	*574.87*	
		For >25 To 50, Add	*344.92*	
		For >50 To 100, Add	*172.46*	
26 25 16 00-0009	LF	4,000 Amperes, 600 Volt, 3 Phase, 3 Wire Copper Conductors, Bus Duct With Supports	3,180.15	112.80
		For Up To 25, Add	*795.04*	
		For >25 To 50, Add	*477.02*	
		For >50 To 100, Add	*238.51*	
26 25 16 00-0010	LF	5,000 Amperes, 600 Volt, 3 Phase, 3 Wire Copper Conductors, Bus Duct With Supports	3,762.42	112.80
		For Up To 25, Add	*940.61*	
		For >25 To 50, Add	*564.36*	
		For >50 To 100, Add	*282.18*	
26 25 16 00-0011	LF	6,000 Amperes, 600 Volt, 3 Phase, 3 Wire Copper Conductors, Bus Duct With Supports	4,635.73	112.80
		For Up To 25, Add	*1,158.93*	
		For >25 To 50, Add	*695.36*	
		For >50 To 100, Add	*347.68*	

26 25 16 00-0012 277/480 Volt, 3 Phase, 4 Wire, Half Neutral, Ventilated *(26 25 16 00-0001)*

Note: Low impedance, copper conductors.

26 25 16 00-0013	LF	800 Amperes, 277/480 Volt, 3 Phase, 4 Wire Copper Conductors, Bus Duct With Supports	991.44	50.76
		For Up To 25, Add	*247.86*	
		For >25 To 50, Add	*148.72*	
		For >50 To 100, Add	*74.36*	
26 25 16 00-0014	LF	1,000 Amperes, 277/480 Volt, 3 Phase, 4 Wire Copper Conductors, Bus Duct With Supports	1,006.26	50.76
		For Up To 25, Add	*251.57*	
		For >25 To 50, Add	*150.94*	
		For >50 To 100, Add	*75.47*	
26 25 16 00-0015	LF	1,350 Amperes, 277/480 Volt, 3 Phase, 4 Wire Copper Conductors, Bus Duct With Supports	1,296.09	50.76
		For Up To 25, Add	*324.02*	
		For >25 To 50, Add	*194.41*	
		For >50 To 100, Add	*97.21*	
26 25 16 00-0016	LF	1,600 Amperes, 277/480 Volt, 3 Phase, 4 Wire Copper Conductors, Bus Duct With Supports	1,536.54	50.76
		For Up To 25, Add	*384.14*	
		For >25 To 50, Add	*230.48*	
		For >50 To 100, Add	*115.24*	
26 25 16 00-0017	LF	2,000 Amperes, 277/480 Volt, 3 Phase, 4 Wire Copper Conductors, Bus Duct With Supports	1,856.61	50.76
		For Up To 25, Add	*464.15*	
		For >25 To 50, Add	*278.49*	
		For >50 To 100, Add	*139.25*	
26 25 16 00-0018	LF	3,000 Amperes, 277/480 Volt, 3 Phase, 4 Wire Copper Conductors, Bus Duct With Supports	2,854.53	86.86
		For Up To 25, Add	*713.63*	
		For >25 To 50, Add	*428.18*	
		For >50 To 100, Add	*214.09*	
26 25 16 00-0019	LF	4,000 Amperes, 277/480 Volt, 3 Phase, 4 Wire Copper Conductors, Bus Duct With Supports	3,580.45	86.86
		For Up To 25, Add	*895.11*	
		For >25 To 50, Add	*537.07*	
		For >50 To 100, Add	*268.53*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 25 16 00-0020	LF	5,000 Amperes, 277/480 Volt, 3 Phase, 4 Wire Copper Conductors, Bus Duct With Supports	4,236.18	161.30
		For Up To 25, Add	*1,059.05*	
		For >25 To 50, Add	*635.43*	
		For >50 To 100, Add	*317.71*	
26 25 16 00-0021	LF	6,000 Amperes, 277/480 Volt, 3 Phase, 4 Wire Copper Conductors, Bus Duct With Supports	5,226.32	161.30
		For Up To 25, Add	*1,306.58*	
		For >25 To 50, Add	*783.95*	
		For >50 To 100, Add	*391.97*	

26 27 Low-Voltage Distribution Equipment *(26 20)*

26 27 13 Electricity Metering *(26 27)*

26 27 13 00-0001 Revenue Metering *(26 27 13)*

26 27 13 00-0002 Meter Socket Base *(26 27 13 00-0001)*

Note: NEMA 3R. See CSI section 26 27 13 00-0013 for meter.

26 27 13 00-0003	EA	100 Amperes, 1 Phase, 3 Wire, 4 Terminal Meter Socket With Bypass	300.09	73.32
26 27 13 00-0004	EA	100 Amperes, 1 Phase, 3 Wire, 5 Terminal Meter Socket With Bypass	320.58	73.32
26 27 13 00-0005	EA	150 Amperes, 1 Phase, 3 Wire, 4 Terminal Meter Socket With Bypass	352.96	81.78
26 27 13 00-0006	EA	150 Amperes, 1 Phase, 3 Wire, 5 Terminal Meter Socket With Bypass	366.12	81.78
26 27 13 00-0007	EA	200 Amperes, 1 Phase, 3 Wire, 4 Terminal Meter Socket With Bypass	405.84	90.24
26 27 13 00-0008	EA	200 Amperes, 1 Phase, 3 Wire, 5 Terminal Meter Socket With Bypass	411.67	90.24
26 27 13 00-0009	EA	200 Amperes, 3 Phase, 4 Wire, 7 Terminal Meter Socket With Bypass And Jaw Release	1,069.60	143.26
26 27 13 00-0010	EA	320 Amperes, 3 Phase, 4 Wire, 7 Terminal Meter Socket With Bypass And Jaw Release	1,388.99	160.18
26 27 13 00-0011	EA	400 Amperes, 3 Phase, 4 Wire, 7 Terminal Meter Socket With Bypass And Jaw Release	3,187.27	177.10
26 27 13 00-0012	EA	Combination Motor And Current Transformer Cabinet, 15 To 30 Amperes, 13 Terminal, Underground, With Test Switch And Transformer, Socket Base	3,063.56	564.00

26 27 13 00-0013 Meter Device *(26 27 13 00-0001)*

Note: Direct read, with 15 minute demand. See CSI section 26 27 13 00-0002 for socket base.

26 27 13 00-0014	EA	100 Amperes, 120 Volt, Or 240 Volt, 1 Phase, KWH Meter	322.04	22.56
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.88*	
26 27 13 00-0015	EA	150 Amperes, 120 Volt, Or 240 Volt, 1 Phase, KWH Meter	383.27	23.41
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.04*	
26 27 13 00-0016	EA	200 Amperes, 120 Volt, Or 240 Volt, 1 Phase, KWH Meter	472.08	23.69
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.21*	
26 27 13 00-0017	EA	200 Amperes, 120 Volt, Or 240 Volt, 3 Phase, KWH Meter	934.90	23.96
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*14.41*	
26 27 13 00-0018	EA	320 Amperes, 120 Volt, Or 240 Volt, 3 Phase, KWH Meter	1,314.64	25.42
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.26*	
26 27 13 00-0019	EA	400 Amperes, 120 Volt, Or 240 Volt, 3 Phase, KWH Meter	2,140.65	28.25
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.95*	

26 27 13 00-0020 Current Transformer Enclosure *(26 27 13 00-0001)*

26 27 13 00-0021	EA	18" x 24" x 9", NEMA 3R, Screwed Cover, Current Transformer Enclosure	607.22	146.64

26 27 13 00-0022 120/240 Volt Meter Center And Main Breaker, Indoor Housing *(26 27 13 00-0001)*

26 27 13 00-0023 800 Amperes Bus, 4 Jaw Sockets, 125 Amperes Max., 2 Pole *(26 27 13 00-0022)*

26 27 13 00-0024	EA	3 Meters And Main, 120/240 Volt, 800 Amperes Bus, 4 Jaw Sockets, 125 Amperes Max	1,268.02	70.50
26 27 13 00-0025	EA	4 Meters And Main, 120/240 Volt, 800 Amperes Bus, 4 Jaw Sockets, 125 Amperes Max	1,674.08	84.60
26 27 13 00-0026	EA	5 Meters And Main, 120/240 Volt, 800 Amperes Bus, 4 Jaw Sockets, 125 Amperes Max	2,077.96	98.70
26 27 13 00-0027	EA	6 Meters And Main, 120/240 Volt, 800 Amperes Bus, 4 Jaw Sockets, 125 Amperes Max	2,408.91	112.80
26 27 13 00-0028	EA	7 Meters And Main, 120/240 Volt, 800 Amperes Bus, 4 Jaw Sockets, 125 Amperes Max	3,148.67	126.90
26 27 13 00-0029	EA	8 Meters And Main, 120/240 Volt, 800 Amperes Bus, 4 Jaw Sockets, 125 Amperes Max	3,397.85	141.01
26 27 13 00-0030	EA	10 Meters And Main, 120/240 Volt, 800 Amperes Bus, 4 Jaw Sockets, 125 Amperes Max	3,962.52	169.20

26 27 13 00-0031 1,200 Amperes Bus, 4 Jaw Sockets, 200 Amperes Max., 2 Pole *(26 27 13 00-0022)*

26 27 13 00-0032	EA	3 Meters And Main, 120/240 Volt, 1,200 Amperes Bus, 4 Jaw Sockets, 200 Amperes Max	2,372.93	70.50
26 27 13 00-0033	EA	4 Meters And Main, 120/240 Volt, 1,200 Amperes Bus, 4 Jaw Sockets, 200 Amperes Max	3,130.37	84.60
26 27 13 00-0034	EA	6 Meters And Main, 120/240 Volt, 1,200 Amperes Bus, 4 Jaw Sockets, 200 Amperes Max	4,313.79	112.80
26 27 13 00-0035	EA	7 Meters And Main, 120/240 Volt, 1,200 Amperes Bus, 4 Jaw Sockets, 200 Amperes Max	4,783.94	126.90
26 27 13 00-0036	EA	8 Meters And Main, 120/240 Volt, 1,200 Amperes Bus, 4 Jaw Sockets, 200 Amperes Max	6,027.54	141.01

26 27 13 00-0037 800 Amperes Bus, 4 Jaw Sockets, 42,000 Amperes Interrupting Capacity, 2 Pole *(26 27 13 00-0022)*

26 27 13 00-0038	EA	3 Meters And Main, 120/240 Volt, 800 Amperes Bus, 4 Jaw Sockets, 42,000 Amperes Interrupting Capacity	1,947.58	98.70
26 27 13 00-0039	EA	4 Meters And Main, 120/240 Volt, 800 Amperes Bus, 4 Jaw Sockets, 42,000 Amperes Interrupting Capacity	2,568.01	112.80
26 27 13 00-0040	EA	5 Meters And Main, 120/240 Volt, 800 Amperes Bus, 4 Jaw Sockets, 42,000 Amperes Interrupting Capacity	3,148.67	126.90
26 27 13 00-0041	EA	6 Meters And Main, 120/240 Volt, 800 Amperes Bus, 4 Jaw Sockets, 42,000 Amperes Interrupting Capacity	3,707.23	141.01
26 27 13 00-0042	EA	7 Meters And Main, 120/240 Volt, 800 Amperes Bus, 4 Jaw Sockets, 42,000 Amperes Interrupting Capacity	4,685.65	155.10
26 27 13 00-0043	EA	8 Meters And Main, 120/240 Volt, 800 Amperes Bus, 4 Jaw Sockets, 42,000 Amperes Interrupting Capacity	4,912.75	169.20
26 27 13 00-0044	EA	10 Meters And Main, 120/240 Volt, 800 Amperes Bus, 4 Jaw Sockets, 42,000 Amperes Interrupting Capacity	6,096.14	197.40

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 27 13 00-0045		1,200 Amperes Bus, 4 Jaw Sockets, 42,000 Amperes Interrupting Capacity, 2 Pole *(26 27 13 00-0022)*		
26 27 13 00-0046	EA	3 Meters And Main, 120/240 Volt, 1,200 Amperes Bus, 4 Jaw Sockets, 42,000 Amperes Interrupting Capacity	3,048.07	98.70
26 27 13 00-0047	EA	4 Meters And Main, 120/240 Volt, 1,200 Amperes Bus, 4 Jaw Sockets, 42,000 Amperes Interrupting Capacity	4,004.40	112.80
26 27 13 00-0048	EA	6 Meters And Main, 120/240 Volt, 1,200 Amperes Bus, 4 Jaw Sockets, 42,000 Amperes Interrupting Capacity	5,651.87	141.01
26 27 13 00-0049	EA	7 Meters And Main, 120/240 Volt, 1,200 Amperes Bus, 4 Jaw Sockets, 42,000 Amperes Interrupting Capacity	6,055.74	155.10
26 27 13 00-0050	EA	8 Meters And Main, 120/240 Volt, 1,200 Amperes Bus, 4 Jaw Sockets, 42,000 Amperes Interrupting Capacity	7,763.38	169.20
26 27 13 00-0051		120/208 Volt Meter Center And Main Breaker, Indoor Housing *(26 27 13 00-0001)*		
26 27 13 00-0052		800 Amperes Bus, 5 Jaw Sockets, 125 Amperes Max., 2 Pole *(26 27 13 00-0051)*		
26 27 13 00-0053	EA	3 Meters And Main, 120/208 Volt, 800 Amperes Bus, 5 Jaw Sockets, 125 Amperes Max	1,375.75	84.60
26 27 13 00-0054	EA	4 Meters And Main, 120/208 Volt, 800 Amperes Bus, 5 Jaw Sockets, 125 Amperes Max	1,806.15	98.70
26 27 13 00-0055	EA	5 Meters And Main, 120/208 Volt, 800 Amperes Bus, 5 Jaw Sockets, 125 Amperes Max	2,234.33	112.80
26 27 13 00-0056	EA	6 Meters And Main, 120/208 Volt, 800 Amperes Bus, 5 Jaw Sockets, 125 Amperes Max	2,596.21	126.90
26 27 13 00-0057	EA	7 Meters And Main, 120/208 Volt, 800 Amperes Bus, 5 Jaw Sockets, 125 Amperes Max	3,198.97	141.01
26 27 13 00-0058	EA	8 Meters And Main, 120/208 Volt, 800 Amperes Bus, 5 Jaw Sockets, 125 Amperes Max	3,448.15	155.10
26 27 13 00-0059	EA	10 Meters And Main, 120/208 Volt, 800 Amperes Bus, 5 Jaw Sockets, 125 Amperes Max	4,255.90	183.30
26 27 13 00-0060		1,200 Amperes Bus, 5 Jaw Sockets, 10,000 Amperes Interrupting Capacity, 2 Pole *(26 27 13 00-0051)*		
26 27 13 00-0061	EA	3 Meters And Main, 120/208 Volt, 1,200 Amperes Bus, 5 Jaw Sockets, 10,000 Amperes Interrupting Capacity	2,489.53	84.60
26 27 13 00-0062	EA	4 Meters And Main, 120/208 Volt, 1,200 Amperes Bus, 5 Jaw Sockets, 10,000 Amperes Interrupting Capacity	3,291.16	98.70
26 27 13 00-0063	EA	6 Meters And Main, 120/208 Volt, 1,200 Amperes Bus, 5 Jaw Sockets, 10,000 Amperes Interrupting Capacity	4,761.84	126.90
26 27 13 00-0064	EA	7 Meters And Main, 120/208 Volt, 1,200 Amperes Bus, 5 Jaw Sockets, 10,000 Amperes Interrupting Capacity	5,232.01	141.01
26 27 13 00-0065	EA	8 Meters And Main, 120/208 Volt, 1,200 Amperes Bus, 5 Jaw Sockets, 10,000 Amperes Interrupting Capacity	6,343.05	155.10
26 27 13 00-0066		800 Amperes Bus, 5 Jaw Sockets, 42,000 Amperes Interrupting Capacity, 2 Pole *(26 27 13 00-0051)*		
26 27 13 00-0067	EA	3 Meters And Main, 120/208 Volt, 800 Amperes Bus, 5 Jaw Sockets, 42,000 Amperes Interrupting Capacity	2,055.35	112.80
26 27 13 00-0068	EA	4 Meters And Main, 120/208 Volt, 800 Amperes Bus, 5 Jaw Sockets, 42,000 Amperes Interrupting Capacity	2,684.63	126.90
26 27 13 00-0069	EA	5 Meters And Main, 120/208 Volt, 800 Amperes Bus, 5 Jaw Sockets, 42,000 Amperes Interrupting Capacity	3,331.59	141.01
26 27 13 00-0070	EA	6 Meters And Main, 120/208 Volt, 800 Amperes Bus, 5 Jaw Sockets, 42,000 Amperes Interrupting Capacity	3,890.15	155.10
26 27 13 00-0071	EA	7 Meters And Main, 120/208 Volt, 800 Amperes Bus, 5 Jaw Sockets, 42,000 Amperes Interrupting Capacity	4,912.80	169.20
26 27 13 00-0072	EA	8 Meters And Main, 120/208 Volt, 800 Amperes Bus, 5 Jaw Sockets, 42,000 Amperes Interrupting Capacity	5,139.83	183.30
26 27 13 00-0073	EA	10 Meters And Main, 120/208 Volt, 800 Amperes Bus, 5 Jaw Sockets, 42,000 Amperes Interrupting Capacity	6,411.67	211.50
26 27 13 00-0074		1,200 Amperes Bus, 5 Jaw Sockets, 42,000 Amperes Interrupting Capacity, 2 Pole *(26 27 13 00-0051)*		
26 27 13 00-0075	EA	3 Meters And Main, 120/208 Volt, 1,200 Amperes Bus, 5 Jaw Sockets, 42,000 Amperes Interrupting Capacity	3,186.78	112.80
26 27 13 00-0076	EA	4 Meters And Main, 120/208 Volt, 1,200 Amperes Bus, 5 Jaw Sockets, 42,000 Amperes Interrupting Capacity	4,209.41	126.90
26 27 13 00-0077	EA	6 Meters And Main, 120/208 Volt, 1,200 Amperes Bus, 5 Jaw Sockets, 42,000 Amperes Interrupting Capacity	6,055.77	155.10
26 27 13 00-0078	EA	7 Meters And Main, 120/208 Volt, 1,200 Amperes Bus, 5 Jaw Sockets, 42,000 Amperes Interrupting Capacity	6,327.03	169.20
26 27 13 00-0079	EA	8 Meters And Main, 120/208 Volt, 1,200 Amperes Bus, 5 Jaw Sockets, 42,000 Amperes Interrupting Capacity	8,056.80	183.30
26 27 13 00-0080		120/240 Volt Meter Center And Main Breaker, NEMA 3R Housing *(26 27 13 00-0001)*		
26 27 13 00-0081		800 Amperes Bus, 4 Jaw Sockets, 10,000 Amperes Interrupting Capacity, 2 Pole *(26 27 13 00-0080)*		
26 27 13 00-0082	EA	3 Meters And Main, 120/240 Volt, 800 Amperes Bus, 4 Jaw Sockets, 10,000 Amperes Interrupting Capacity	1,268.02	70.50
26 27 13 00-0083	EA	4 Meters And Main, 120/240 Volt, 800 Amperes Bus, 4 Jaw Sockets, 10,000 Amperes Interrupting Capacity	1,674.08	84.60
26 27 13 00-0084	EA	6 Meters And Main, 120/240 Volt, 800 Amperes Bus, 4 Jaw Sockets, 10,000 Amperes Interrupting Capacity	2,408.91	112.80
26 27 13 00-0085	EA	7 Meters And Main, 120/240 Volt, 800 Amperes Bus, 4 Jaw Sockets, 10,000 Amperes Interrupting Capacity	3,148.67	126.90
26 27 13 00-0086	EA	8 Meters And Main, 120/240 Volt, 800 Amperes Bus, 4 Jaw Sockets, 10,000 Amperes Interrupting Capacity	3,906.11	141.01
26 27 13 00-0087		1,200 Amperes Bus, 4 Jaw Sockets, 10,000 Amperes Interrupting Capacity, 2 Pole *(26 27 13 00-0080)*		
26 27 13 00-0088	EA	3 Meters And Main, 120/240 Volt, 1,200 Amperes Bus, 4 Jaw Sockets, 10,000 Amperes Interrupting Capacity	2,372.93	70.50
26 27 13 00-0089	EA	4 Meters And Main, 120/240 Volt, 1,200 Amperes Bus, 4 Jaw Sockets, 10,000 Amperes Interrupting Capacity	3,130.35	84.60
26 27 13 00-0090	EA	6 Meters And Main, 120/240 Volt, 1,200 Amperes Bus, 4 Jaw Sockets, 10,000 Amperes Interrupting Capacity	4,534.76	112.80
26 27 13 00-0091	EA	7 Meters And Main, 120/240 Volt, 1,200 Amperes Bus, 4 Jaw Sockets, 10,000 Amperes Interrupting Capacity	5,004.92	126.90
26 27 13 00-0092	EA	8 Meters And Main, 120/240 Volt, 1,200 Amperes Bus, 4 Jaw Sockets, 10,000 Amperes Interrupting Capacity	6,027.54	141.01
26 27 13 00-0093		800 Amperes Bus, 4 Jaw Sockets, 42,000 Amperes Interrupting Capacity, 2 Pole *(26 27 13 00-0080)*		
26 27 13 00-0094	EA	3 Meters And Main, 120/240 Volt, 800 Amperes Bus, 4 Jaw Sockets, 42,000 Amperes Interrupting Capacity	1,947.58	98.70
26 27 13 00-0095	EA	4 Meters And Main, 120/240 Volt, 800 Amperes Bus, 4 Jaw Sockets, 42,000 Amperes Interrupting Capacity	2,568.01	112.80
26 27 13 00-0096	EA	6 Meters And Main, 120/240 Volt, 800 Amperes Bus, 4 Jaw Sockets, 42,000 Amperes Interrupting Capacity	3,707.23	141.01
26 27 13 00-0097	EA	7 Meters And Main, 120/240 Volt, 800 Amperes Bus, 4 Jaw Sockets, 42,000 Amperes Interrupting Capacity	4,685.65	155.10
26 27 13 00-0098	EA	8 Meters And Main, 120/240 Volt, 800 Amperes Bus, 4 Jaw Sockets, 42,000 Amperes Interrupting Capacity	4,912.75	169.20

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 27 13 00-0099		1,200 Amperes Bus, 4 Jaw Sockets, 42,000 Amperes Interrupting Capacity, 2 Pole *(26 27 13 00-0080)*		
26 27 13 00-0100	EA	3 Meters And Main, 120/240 Volt, 1,200 Amperes Bus, 4 Jaw Sockets, 42,000 Amperes Interrupting Capacity	3,048.08	98.70
26 27 13 00-0101	EA	4 Meters And Main, 120/240 Volt, 1,200 Amperes Bus, 4 Jaw Sockets, 42,000 Amperes Interrupting Capacity	4,004.40	112.80
26 27 13 00-0102	EA	6 Meters And Main, 120/240 Volt, 1,200 Amperes Bus, 4 Jaw Sockets, 42,000 Amperes Interrupting Capacity	5,651.87	141.01
26 27 13 00-0103	EA	7 Meters And Main, 120/240 Volt, 1,200 Amperes Bus, 4 Jaw Sockets, 42,000 Amperes Interrupting Capacity	6,055.74	155.10
26 27 13 00-0104	EA	8 Meters And Main, 120/240 Volt, 1,200 Amperes Bus, 4 Jaw Sockets, 42,000 Amperes Interrupting Capacity	7,763.42	169.20
26 27 13 00-0105		120/208 Volt Meter Center And Main Breaker, NEMA 3R Housing *(26 27 13 00-0001)*		
26 27 13 00-0106		800 Amperes Bus, 5 Jaw Sockets, 10,000 Amperes Interrupting Capacity, 2 Pole *(26 27 13 00-0105)*		
26 27 13 00-0107	EA	3 Meters And Main, 120/208 Volt, 800 Amperes Bus, 5 Jaw Sockets, 10,000 Amperes Interrupting Capacity	1,375.75	84.60
26 27 13 00-0108	EA	4 Meters And Main, 120/208 Volt, 800 Amperes Bus, 5 Jaw Sockets, 10,000 Amperes Interrupting Capacity	1,806.15	98.70
26 27 13 00-0109	EA	6 Meters And Main, 120/208 Volt, 800 Amperes Bus, 5 Jaw Sockets, 10,000 Amperes Interrupting Capacity	2,596.21	126.90
26 27 13 00-0110	EA	7 Meters And Main, 120/208 Volt, 800 Amperes Bus, 5 Jaw Sockets, 10,000 Amperes Interrupting Capacity	3,419.95	141.01
26 27 13 00-0111	EA	8 Meters And Main, 120/208 Volt, 800 Amperes Bus, 5 Jaw Sockets, 10,000 Amperes Interrupting Capacity	3,890.12	155.10
26 27 13 00-0112		1,200 Amperes Bus, 5 Jaw Sockets, 10,000 Amperes Interrupting Capacity, 2 Pole *(26 27 13 00-0105)*		
26 27 13 00-0113	EA	3 Meters And Main, 120/208 Volt, 1,200 Amperes Bus, 5 Jaw Sockets, 10,000 Amperes Interrupting Capacity	2,489.51	84.60
26 27 13 00-0114	EA	4 Meters And Main, 120/208 Volt, 1,200 Amperes Bus, 5 Jaw Sockets, 10,000 Amperes Interrupting Capacity	3,291.15	98.70
26 27 13 00-0115	EA	6 Meters And Main, 120/208 Volt, 1,200 Amperes Bus, 5 Jaw Sockets, 10,000 Amperes Interrupting Capacity	4,540.86	126.90
26 27 13 00-0116	EA	7 Meters And Main, 120/208 Volt, 1,200 Amperes Bus, 5 Jaw Sockets, 10,000 Amperes Interrupting Capacity	5,011.02	141.01
26 27 13 00-0117	EA	8 Meters And Main, 120/208 Volt, 1,200 Amperes Bus, 5 Jaw Sockets, 10,000 Amperes Interrupting Capacity	6,343.02	155.10
26 27 13 00-0118		800 Amperes Bus, 5 Jaw Sockets, 42,000 Amperes Interrupting Capacity, 2 Pole *(26 27 13 00-0105)*		
26 27 13 00-0119	EA	3 Meters And Main, 120/208 Volt, 800 Amperes Bus, 5 Jaw Sockets, 42,000 Amperes Interrupting Capacity	2,055.33	112.80
26 27 13 00-0120	EA	4 Meters And Main, 120/208 Volt, 800 Amperes Bus, 5 Jaw Sockets, 42,000 Amperes Interrupting Capacity	2,684.61	126.90
26 27 13 00-0121	EA	6 Meters And Main, 120/208 Volt, 800 Amperes Bus, 5 Jaw Sockets, 42,000 Amperes Interrupting Capacity	3,890.12	155.10
26 27 13 00-0122	EA	7 Meters And Main, 120/208 Volt, 800 Amperes Bus, 5 Jaw Sockets, 42,000 Amperes Interrupting Capacity	4,912.75	169.20
26 27 13 00-0123	EA	8 Meters And Main, 120/208 Volt, 800 Amperes Bus, 5 Jaw Sockets, 42,000 Amperes Interrupting Capacity	5,139.83	183.30
26 27 13 00-0124		1,200 Amperes Bus, 5 Jaw Sockets, 42,000 Amperes Interrupting Capacity, 2 Pole *(26 27 13 00-0105)*		
26 27 13 00-0125	EA	3 Meters And Main, 120/208 Volt, 1,200 Amperes Bus, 5 Jaw Sockets, 42,000 Amperes Interrupting Capacity	3,186.76	112.80
26 27 13 00-0126	EA	4 Meters And Main, 120/208 Volt, 1,200 Amperes Bus, 5 Jaw Sockets, 42,000 Amperes Interrupting Capacity	4,209.39	126.90
26 27 13 00-0127	EA	6 Meters And Main, 120/208 Volt, 1,200 Amperes Bus, 5 Jaw Sockets, 42,000 Amperes Interrupting Capacity	6,055.74	155.10
26 27 13 00-0128	EA	7 Meters And Main, 120/208 Volt, 1,200 Amperes Bus, 5 Jaw Sockets, 42,000 Amperes Interrupting Capacity	6,327.03	169.20
26 27 13 00-0129	EA	8 Meters And Main, 120/208 Volt, 1,200 Amperes Bus, 5 Jaw Sockets, 42,000 Amperes Interrupting Capacity	8,056.80	183.30
26 27 13 00-0130		Watt/Hour Meters *(26 27 13)*		
26 27 13 00-0131	EA	Single Phase M-90 Meter, Socket, NEMA 3R Enclosure	1,435.64	67.68
26 27 13 00-0132	EA	Three Phase M-90 Meter/Main Breaker Combination With Socket, NEMA 3R Enclosure	4,108.58	135.36
26 27 13 00-0133	EA	Three Phase M-90 Meter In Line Secondary With Socket, NEMA 3R Enclosure	2,148.57	101.52
26 27 13 00-0134	EA	Three Phase M-90 Meter, Primary Side Transformer Mount With Socket Totally Enclosed, NEMA 3R Enclosure	2,653.25	101.52
26 27 13 00-0135	EA	Three Phase M-90 Meter, Primary Side Pole Mount With Socket, NEMA 3R Enclosure	2,222.70	101.52
26 27 13 00-0136	EA	C.T. For M-90 Meter On Primary Side, NEMA 3R Enclosure	1,519.17	93.62
26 27 13 00-0137	EA	P.T. For M-90 Meter On Primary Side, NEMA 3R Enclosure	2,590.94	169.20
26 27 13 00-0138		Watt/Hour Meter Systems *(26 27 13)* Note: Includes NEMA 3R enclosure with C.T. and NEMA 3R C.T. enclosure. systems with main breakers include an additional NEMA 3R enclosure.		
26 27 13 00-0139		Watt/Hour Meter System Without Main Breaker *(26 27 13 00-0138)*		
26 27 13 00-0140	EA	400 Amperes System; 200 Amperes M-90 Meter And Enclosure	6,476.89	676.92
26 27 13 00-0141	EA	600 To 800 Amperes System; 200 Amperes M-90 Meter And Enclosure	7,667.94	676.92
26 27 13 00-0142		Watt/Hour Meter System With Main Breaker *(26 27 13 00-0138)*		
26 27 13 00-0143	EA	400 Amperes System; 400 Amperes Main Breaker, 200 Amperes M-90 Meter And Enclosure	11,706.19	676.92
26 27 13 00-0144	EA	600 Amperes System; 600 Amperes Main Breaker, 200 Amperes M-90 Meter And Enclosure	14,303.34	676.92
26 27 13 00-0145	EA	800 Amperes System; 800 Amperes Main Breaker, 200 Amperes M-90 Meter And Enclosure	15,404.77	676.92
26 27 16		**Electrical Cabinets and Enclosures** *(26 27)* Note: Can be used as enclosure or pull/junction boxes.		
26 27 16 00-0001		NEMA 1 Enclosures, Lockable *(26 27 16)*		
26 27 16 00-0002		Hinged Cover, Galvanized Steel NEMA 1 Enclosures *(26 27 16 00-0001)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 27 16 00-0003		**4" Depth, Hinged Cover, Galvanized Steel NEMA 1 Enclosures** *(26 27 16 00-0002)*		
26 27 16 00-0004	EA	6" x 4" x 4", Hinged Cover, Galvanized Steel NEMA 1 Enclosure	73.21	22.56
26 27 16 00-0005	EA	6" x 6" x 4", Hinged Cover, Galvanized Steel NEMA 1 Enclosure	82.25	24.82
26 27 16 00-0006	EA	8" x 6" x 4", Hinged Cover, Galvanized Steel NEMA 1 Enclosure	91.38	27.07
26 27 16 00-0007	EA	8" x 8" x 4", Hinged Cover, Galvanized Steel NEMA 1 Enclosure	106.69	31.59
26 27 16 00-0008	EA	10" x 8" x 4", Hinged Cover, Galvanized Steel NEMA 1 Enclosure	116.38	33.84
26 27 16 00-0009	EA	10" x 10" x 4", Hinged Cover, Galvanized Steel NEMA 1 Enclosure	126.82	36.10
26 27 16 00-0010	EA	12" x 8" x 4", Hinged Cover, Galvanized Steel NEMA 1 Enclosure	126.44	36.10
26 27 16 00-0011	EA	12" x 10" x 4", Hinged Cover, Galvanized Steel NEMA 1 Enclosure	137.15	38.35
26 27 16 00-0012	EA	12" x 12" x 4" Hinged Cover, Galvanized Steel NEMA 1 Enclosure	148.44	40.61
26 27 16 00-0013	EA	16" x 12" x 4", Hinged Cover, Galvanized Steel NEMA 1 Enclosure	192.06	54.15
26 27 16 00-0014	EA	16" x 16" x 4" Hinged Cover, Galvanized Steel NEMA 1 Enclosure	233.05	65.43
26 27 16 00-0015	EA	18" x 12" x 4" Hinged Cover, Galvanized Steel NEMA 1 Enclosure	221.10	63.17
26 27 16 00-0016		**6" Depth, Hinged Cover, Galvanized Steel NEMA 1 Enclosures** *(26 27 16 00-0002)*		
26 27 16 00-0017	EA	6" x 6" x 6", Hinged Cover, Galvanized Steel NEMA 1 Enclosure	92.13	27.07
26 27 16 00-0018	EA	8" x 8" x 6", Hinged Cover, Galvanized Steel NEMA 1 Enclosure	112.24	31.59
26 27 16 00-0019	EA	10" x 8" x 6", Hinged Cover, Galvanized Steel NEMA 1 Enclosure	133.80	38.35
26 27 16 00-0020	EA	10" x 10" x 6", Hinged Cover, Galvanized Steel NEMA 1 Enclosure	144.80	40.61
26 27 16 00-0021	EA	12" x 10" x 6", Hinged Cover, Galvanized Steel NEMA 1 Enclosure	156.04	42.86
26 27 16 00-0022	EA	12" x 12" x 6", Hinged Cover, Galvanized Steel NEMA 1 Enclosure	167.82	45.12
26 27 16 00-0023	EA	16" x 12" x 6", Hinged Cover, Galvanized Steel NEMA 1 Enclosure	212.70	58.66
26 27 16 00-0024	EA	16" x 16" x 6", Hinged Cover, Galvanized Steel NEMA 1 Enclosure	257.55	72.19
26 27 16 00-0025	EA	18" x 12" x 6", Hinged Cover, Galvanized Steel NEMA 1 Enclosure	248.28	69.94
26 27 16 00-0026	EA	18" x 18" x 6", Hinged Cover, Galvanized Steel NEMA 1 Enclosure	323.59	90.24
26 27 16 00-0027	EA	24" x 18" x 6", Hinged Cover, Galvanized Steel NEMA 1 Enclosure	418.95	103.78
26 27 16 00-0028	EA	24" x 24" x 6", Hinged Cover, Galvanized Steel NEMA 1 Enclosure	480.47	112.80
26 27 16 00-0029	EA	30" x 24" x 6", Hinged Cover, Galvanized Steel NEMA 1 Enclosure	536.69	119.56
26 27 16 00-0030	EA	36" x 24" x 6", Hinged Cover, Galvanized Steel NEMA 1 Enclosure	587.27	124.09
26 27 16 00-0031	EA	24-1/2" x 12-1/2" x 6-1/2", Hinged Cover, Galvanized Steel NEMA 1 Enclosure (Control Products MH3803L)	410.15	90.24
26 27 16 00-0032		**Screw Cover, Galvanized Steel NEMA 1 Enclosures** *(26 27 16 00-0001)*		
26 27 16 00-0033		**3" Depth, Screw Cover, Galvanized Steel NEMA 1 Enclosures** *(26 27 16 00-0032)*		
26 27 16 00-0034	EA	4" x 4" x 3" Screw Cover, Galvanized Steel NEMA 1 Enclosure	51.62	15.79
26 27 16 00-0035	EA	6" x 6" x 3" Screw Cover, Galvanized Steel NEMA 1 Enclosure	73.78	22.56
26 27 16 00-0036	EA	8" x 6" x 3" Screw Cover, Galvanized Steel NEMA 1 Enclosure	82.51	24.82
26 27 16 00-0037		**4" Depth, Screw Cover, Galvanized Steel NEMA 1 Enclosures** *(26 27 16 00-0032)*		
26 27 16 00-0038	EA	4" x 4" x 4" Screw Cover, Galvanized Steel NEMA 1 Enclosure	57.48	18.05
26 27 16 00-0039	EA	6" x 4" x 4" Screw Cover, Galvanized Steel NEMA 1 Enclosure	71.15	22.56
26 27 16 00-0040	EA	6" x 6" x 4" Screw Cover, Galvanized Steel NEMA 1 Enclosure	79.70	24.82
26 27 16 00-0041	EA	8" x 6" x 4" Screw Cover, Galvanized Steel NEMA 1 Enclosure	88.43	27.07
26 27 16 00-0042	EA	8" x 8" x 4" Screw Cover, Galvanized Steel NEMA 1 Enclosure	103.18	31.59
26 27 16 00-0043	EA	10" x 8" x 4" Screw Cover, Galvanized Steel NEMA 1 Enclosure	112.38	33.84
26 27 16 00-0044	EA	10" x 10" x 4" Screw Cover, Galvanized Steel NEMA 1 Enclosure	122.12	36.10
26 27 16 00-0045	EA	12" x 8" x 4" Screw Cover, Galvanized Steel NEMA 1 Enclosure	121.71	36.10
26 27 16 00-0046	EA	12" x 10" x 4" Screw Cover, Galvanized Steel NEMA 1 Enclosure	131.92	38.35
26 27 16 00-0047	EA	12" x 12" x 4" Screw Cover, Galvanized Steel NEMA 1 Enclosure	142.48	40.61
26 27 16 00-0048	EA	16" x 12" x 4" Screw Cover, Galvanized Steel NEMA 1 Enclosure	185.77	54.15
26 27 16 00-0049	EA	16" x 16" x 4" Screw Cover, Galvanized Steel NEMA 1 Enclosure	229.84	67.68
26 27 16 00-0050	EA	18" x 12" x 4" Screw Cover, Galvanized Steel NEMA 1 Enclosure	213.06	63.17
26 27 16 00-0051	EA	18" x 18" x 4" Screw Cover, Galvanized Steel NEMA 1 Enclosure	276.33	81.21
26 27 16 00-0052	EA	24" x 24" x 4" Screw Cover, Galvanized Steel NEMA 1 Enclosure	408.32	101.52
26 27 16 00-0053		**6" Depth, Screw Cover, Galvanized Steel NEMA 1 Enclosures** *(26 27 16 00-0032)*		
26 27 16 00-0054	EA	6" x 6" x 6" Screw Cover, Galvanized Steel NEMA 1 Enclosure	89.01	27.07
26 27 16 00-0055	EA	8" x 6" x 6" Screw Cover, Galvanized Steel NEMA 1 Enclosure	98.51	29.33
26 27 16 00-0056	EA	8" x 8" x 6" Screw Cover, Galvanized Steel NEMA 1 Enclosure	113.52	33.84
26 27 16 00-0057	EA	10" x 8" x 6" Screw Cover, Galvanized Steel NEMA 1 Enclosure	128.92	38.35
26 27 16 00-0058	EA	10" x 10" x 6" Screw Cover, Galvanized Steel NEMA 1 Enclosure	139.31	40.61
26 27 16 00-0059	EA	12" x 10" x 6" Screw Cover, Galvanized Steel NEMA 1 Enclosure	149.82	42.86
26 27 16 00-0060	EA	12" x 12" x 6" Screw Cover, Galvanized Steel NEMA 1 Enclosure	160.81	45.12
26 27 16 00-0061	EA	16" x 12" x 6" Screw Cover, Galvanized Steel NEMA 1 Enclosure	205.37	58.66
26 27 16 00-0062	EA	16" x 16" x 6" Screw Cover, Galvanized Steel NEMA 1 Enclosure	252.26	72.19
26 27 16 00-0063	EA	18" x 12" x 6" Screw Cover, Galvanized Steel NEMA 1 Enclosure	238.96	69.94
26 27 16 00-0064	EA	18" x 18" x 6" Screw Cover, Galvanized Steel NEMA 1 Enclosure	311.12	90.24
26 27 16 00-0065	EA	24" x 18" x 6" Screw Cover, Galvanized Steel NEMA 1 Enclosure	393.88	103.78
26 27 16 00-0066	EA	24" x 24" x 6" Screw Cover, Galvanized Steel NEMA 1 Enclosure	455.07	112.80
26 27 16 00-0067	EA	30" x 24" x 6" Screw Cover, Galvanized Steel NEMA 1 Enclosure	492.65	119.56
26 27 16 00-0068	EA	36" x 24" x 6" Screw Cover, Galvanized Steel NEMA 1 Enclosure	542.86	124.09
26 27 16 00-0069		**8" Depth, Screw Cover, Galvanized Steel NEMA 1 Enclosures** *(26 27 16 00-0032)*		
26 27 16 00-0070	EA	8" x 8" x 8" Screw Cover, Galvanized Steel NEMA 1 Enclosure	128.92	38.35
26 27 16 00-0071	EA	12" x 12" x 8" Screw Cover, Galvanized Steel NEMA 1 Enclosure	177.49	49.63

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 27 16 00-0072	EA	16" x 12" x 8" Screw Cover, Galvanized Steel NEMA 1 Enclosure	225.59	63.17
26 27 16 00-0073	EA	16" x 16" x 8" Screw Cover, Galvanized Steel NEMA 1 Enclosure	279.66	78.96
26 27 16 00-0074	EA	18" x 12" x 8" Screw Cover, Galvanized Steel NEMA 1 Enclosure	266.54	76.70
26 27 16 00-0075	EA	18" x 18" x 8" Screw Cover, Galvanized Steel NEMA 1 Enclosure	330.35	94.76
26 27 16 00-0076	EA	24" x 12" x 8" Screw Cover, Galvanized Steel NEMA 1 Enclosure	366.85	108.29
26 27 16 00-0077	EA	24" x 18" x 8" Screw Cover, Galvanized Steel NEMA 1 Enclosure	431.79	115.05
26 27 16 00-0078	EA	24" x 24" x 8" Screw Cover, Galvanized Steel NEMA 1 Enclosure	501.99	124.09
26 27 16 00-0079	EA	30" x 24" x 8" Screw Cover, Galvanized Steel NEMA 1 Enclosure	534.83	130.85
26 27 16 00-0080	EA	30" x 30" x 8" Screw Cover, Galvanized Steel NEMA 1 Enclosure	563.15	135.36
26 27 16 00-0081	EA	36" x 24" x 8" Screw Cover, Galvanized Steel NEMA 1 Enclosure	580.19	135.36
26 27 16 00-0082		**10" Depth, Screw Cover, Galvanized Steel NEMA 1 Enclosures** *(26 27 16 00-0032)*		
26 27 16 00-0083	EA	18" x 12" x 10" Screw Cover, Galvanized Steel NEMA 1 Enclosure	303.29	85.72
26 27 16 00-0084	EA	18" x 18" x 10" Screw Cover, Galvanized Steel NEMA 1 Enclosure	400.51	110.54
26 27 16 00-0085	EA	24" x 12" x 10" Screw Cover, Galvanized Steel NEMA 1 Enclosure	402.18	117.31
26 27 16 00-0086	EA	24" x 18" x 10" Screw Cover, Galvanized Steel NEMA 1 Enclosure	537.14	126.34
26 27 16 00-0087	EA	24" x 24" x 10" Screw Cover, Galvanized Steel NEMA 1 Enclosure	621.45	139.87
26 27 16 00-0088	EA	30" x 24" x 10" Screw Cover, Galvanized Steel NEMA 1 Enclosure	696.12	144.38
26 27 16 00-0089	EA	36" x 24" x 10" Screw Cover, Galvanized Steel NEMA 1 Enclosure	744.29	151.15
26 27 16 00-0090		**12" Depth, Screw Cover, Galvanized Steel NEMA 1 Enclosures** *(26 27 16 00-0032)*		
26 27 16 00-0091	EA	18" x 18" x 12", Screw Cover, Galvanized Steel NEMA 1 Enclosure	442.30	121.82
26 27 16 00-0092	EA	24" x 12" x 12", Screw Cover, Galvanized Steel NEMA 1 Enclosure	436.21	128.60
26 27 16 00-0093	EA	24" x 18" x 12", Screw Cover, Galvanized Steel NEMA 1 Enclosure	590.00	139.87
26 27 16 00-0094	EA	24" x 24" x 12", Screw Cover, Galvanized Steel NEMA 1 Enclosure	677.92	153.40
26 27 16 00-0095	EA	30" x 24" x 12", Screw Cover, Galvanized Steel NEMA 1 Enclosure	767.82	160.18
26 27 16 00-0096	EA	36" x 24" x 12", Screw Cover, Galvanized Steel NEMA 1 Enclosure	811.04	166.95
26 27 16 00-0097		**NEMA 1 Enclosures For Up To 6 Boards, Lockable** *(26 27 16)*		
26 27 16 00-0098		**4.5" Depth, Hinged Cover, Powder Coated Steel, NEMA 1 Enclosures** *(26 27 16 00-0097)*		
26 27 16 00-0099	EA	24" High x 18" Wide x 4.5" Deep, 18 Gauge, Powder Coated Steel, NEMA 1 Enclosure (RS2 Technologies NCL-12)	1,253.64	99.27
26 27 16 00-0100		**NEMA 12 Enclosures, Lockable** *(26 27 16)* Note: Dust-tight enclosures.		
26 27 16 00-0101		**Hinged Cover, Galvanized Steel NEMA 12 Enclosures** *(26 27 16 00-0100)*		
26 27 16 00-0102		**4" Depth, Hinged Cover, Galvanized Steel NEMA 12 Enclosures** *(26 27 16 00-0101)*		
26 27 16 00-0103	EA	4" x 4" x 4" Hinged Cover, Galvanized Steel NEMA 12 Enclosure	108.68	18.05
26 27 16 00-0104	EA	6" x 6" x 4" Hinged Cover, Galvanized Steel NEMA 12 Enclosure	141.10	24.82
26 27 16 00-0105	EA	8" x 8" x 4" Hinged Cover, Galvanized Steel NEMA 12 Enclosure	174.28	31.59
26 27 16 00-0106	EA	10" x 8" x 4" Hinged Cover, Galvanized Steel NEMA 12 Enclosure	188.80	33.84
26 27 16 00-0107	EA	12" x 6" x 4" Hinged Cover, Galvanized Steel NEMA 12 Enclosure	212.56	36.10
26 27 16 00-0108	EA	12" x 10" x 4" Hinged Cover, Galvanized Steel NEMA 12 Enclosure	229.14	38.35
26 27 16 00-0109		**6" Depth, Hinged Cover, Galvanized Steel NEMA 12 Enclosures** *(26 27 16 00-0101)*		
26 27 16 00-0110	EA	6" x 6" x 6" Hinged Cover, Galvanized Steel NEMA 12 Enclosure	156.81	27.07
26 27 16 00-0111	EA	8" x 6" x 6" Hinged Cover, Galvanized Steel NEMA 12 Enclosure	172.93	29.33
26 27 16 00-0112		**Screw Cover, Galvanized Steel NEMA 12 Enclosures** *(26 27 16 00-0100)*		
26 27 16 00-0113		**4" Depth, Screw Cover, Galvanized Steel NEMA 12 Enclosures** *(26 27 16 00-0112)*		
26 27 16 00-0114	EA	4" x 4" x 4" Screw Cover, Galvanized Steel NEMA 12 Enclosure	232.43	18.05
26 27 16 00-0115	EA	6" x 6" x 4" Screw Cover, Galvanized Steel NEMA 12 Enclosure	277.28	24.82
26 27 16 00-0116	EA	8" x 6" x 4" Screw Cover, Galvanized Steel NEMA 12 Enclosure	314.04	27.07
26 27 16 00-0117	EA	8" x 8" x 4" Screw Cover, Galvanized Steel NEMA 12 Enclosure	359.00	31.59
26 27 16 00-0118	EA	10" x 8" x 4" Screw Cover, Galvanized Steel NEMA 12 Enclosure	368.59	33.84
26 27 16 00-0119	EA	10" x 10" x 4" Screw Cover, Galvanized Steel NEMA 12 Enclosure	437.18	36.10
26 27 16 00-0120	EA	12" x 10" x 4" Screw Cover, Galvanized Steel NEMA 12 Enclosure	469.60	38.35
26 27 16 00-0121	EA	12" x 12" x 4" Screw Cover, Galvanized Steel NEMA 12 Enclosure	535.83	40.61
26 27 16 00-0122		**6" Depth, Screw Cover, Galvanized Steel NEMA 12 Enclosures** *(26 27 16 00-0112)*		
26 27 16 00-0123	EA	6" x 6" x 6" Screw Cover, Galvanized Steel NEMA 12 Enclosure	339.11	27.07
26 27 16 00-0124	EA	8" x 6" x 6" Screw Cover, Galvanized Steel NEMA 12 Enclosure	383.97	29.33
26 27 16 00-0125	EA	8" x 8" x 6" Screw Cover, Galvanized Steel NEMA 12 Enclosure	417.63	33.84
26 27 16 00-0126	EA	10" x 10" x 6" Screw Cover, Galvanized Steel NEMA 12 Enclosure	493.67	40.61
26 27 16 00-0127	EA	12" x 12" x 6" Screw Cover, Galvanized Steel NEMA 12 Enclosure	535.63	45.12
26 27 16 00-0128	EA	16" x 14" x 6" Screw Cover, Galvanized Steel NEMA 12 Enclosure	745.74	58.66
26 27 16 00-0129	EA	18" x 18" x 6" Screw Cover, Galvanized Steel NEMA 12 Enclosure	1,155.95	90.24
26 27 16 00-0130	EA	24" x 16" x 6" Screw Cover, Galvanized Steel NEMA 12 Enclosure	1,521.10	103.78
26 27 16 00-0131	EA	24" x 24" x 6" Screw Cover, Galvanized Steel NEMA 12 Enclosure	1,717.00	112.80

copyright 2026 The Gordian Group, Inc.

CSI	MINOR UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 27 16 00-0132		8" Depth, Screw Cover, Galvanized Steel NEMA 12 Enclosures *(26 27 16 00-0112)*		
26 27 16 00-0133	EA	24" x 18" x 8" Screw Cover, Galvanized Steel NEMA 12 Enclosure	1,582.78	115.05
26 27 16 00-0134	EA	24" x 24" x 8" Screw Cover, Galvanized Steel NEMA 12 Enclosure	1,828.17	124.09
26 27 16 00-0135	EA	30" x 24" x 8" Screw Cover, Galvanized Steel NEMA 12 Enclosure	2,012.25	130.85
26 27 16 00-0136	EA	30" x 30" x 8" Screw Cover, Galvanized Steel NEMA 12 Enclosure	2,222.89	135.36
26 27 16 00-0137	EA	36" x 24" x 8" Screw Cover, Galvanized Steel NEMA 12 Enclosure	2,191.38	135.36
26 27 16 00-0138		Double Door, Floor Mounted, Galvanized Steel NEMA 12 Enclosures *(26 27 16 00-0100)*		
26 27 16 00-0139		8" Depth, Double Door, Floor Mounted, Galvanized Steel NEMA 12 Enclosures *(26 27 16 00-0138)*		
26 27 16 00-0140	EA	60" x 48" x 8" Double Door, Floor Mounted, Galvanized Steel NEMA 12 Enclosure	7,141.55	183.30
26 27 16 00-0141		10" Depth, Double Door, Floor Mounted, Galvanized Steel NEMA 12 Enclosures *(26 27 16 00-0138)*		
26 27 16 00-0142	EA	60" x 48" x 10" Double Door, Floor Mounted, Galvanized Steel NEMA 12 Enclosure	7,203.80	203.04
26 27 16 00-0143	EA	60" x 60" x 10" Double Door, Floor Mounted, Galvanized Steel NEMA 12 Enclosure	8,269.55	217.14
26 27 16 00-0144	EA	72" x 60" x 10" Double Door, Floor Mounted, Galvanized Steel NEMA 12 Enclosure	9,505.34	270.72
26 27 16 00-0145	EA	72" x 72" x 10" Double Door, Floor Mounted, Galvanized Steel NEMA 12 Enclosure	10,607.31	319.23
26 27 16 00-0146		12" Depth, Double Door, Floor Mounted, Galvanized Steel NEMA 12 Enclosures *(26 27 16 00-0138)*		
26 27 16 00-0147	EA	60" x 48" x 12" Double Door, Floor Mounted, Galvanized Steel NEMA 12 Enclosure	7,644.33	319.23
26 27 16 00-0148	EA	60" x 60" x 12" Double Door, Floor Mounted, Galvanized Steel NEMA 12 Enclosure	8,528.33	338.40
26 27 16 00-0149	EA	72" x 60" x 12" Double Door, Floor Mounted, Galvanized Steel NEMA 12 Enclosure	9,695.58	360.96
26 27 16 00-0150	EA	72" x 72" x 12" Double Door, Floor Mounted, Galvanized Steel NEMA 12 Enclosure	10,713.56	360.96
26 27 16 00-0151		NEMA 3 Enclosures, Lockable *(26 27 16)* Note: Can be used underground or encased in concrete.		
26 27 16 00-0152		2" Depth, Screw Cover, Galvanized Cast Iron NEMA 3 Enclosures *(26 27 16 00-0151)*		
26 27 16 00-0153	EA	4" x 4" x 2" Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	348.38	78.96
26 27 16 00-0154		3" Depth, Screw Cover, Galvanized Cast Iron NEMA 3 Enclosures *(26 27 16 00-0151)*		
26 27 16 00-0155	EA	4" x 4" x 3" Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	378.51	78.96
26 27 16 00-0156	EA	5" x 5" x 3" Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	498.23	81.78
26 27 16 00-0157	EA	6" x 4" x 3" Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	518.74	81.78
26 27 16 00-0158	EA	6" x 6" x 3" Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	665.54	84.60
26 27 16 00-0159		4" Depth, Screw Cover, Galvanized Cast Iron NEMA 3 Enclosures *(26 27 16 00-0151)*		
26 27 16 00-0160	EA	4" x 4" x 4" Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	492.69	81.78
26 27 16 00-0161	EA	5" x 5" x 4" Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	546.31	81.78
26 27 16 00-0162	EA	6" x 4" x 4" Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	569.98	84.60
26 27 16 00-0163	EA	6" x 6" x 4" Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	734.69	84.60
26 27 16 00-0164	EA	8" x 6" x 4" Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	809.73	90.24
26 27 16 00-0165	EA	8" x 8" x 4" Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	872.57	95.88
26 27 16 00-0166	EA	10" x 6" x 4" Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	911.75	95.88
26 27 16 00-0167	EA	10" x 8" x 4" Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	1,095.96	98.70
26 27 16 00-0168	EA	12" x 6" x 4" Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	1,193.23	101.52
26 27 16 00-0169	EA	12" x 12" x 4" Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	1,653.76	112.80
26 27 16 00-0170		6" Depth, Screw Cover, Galvanized Cast Iron NEMA 3 Enclosures *(26 27 16 00-0151)*		
26 27 16 00-0171	EA	6" x 6" x 6", Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	777.42	87.42
26 27 16 00-0172	EA	8" x 6" x 6", Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	988.53	98.70
26 27 16 00-0173	EA	8" x 8" x 6", Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	1,169.14	101.52
26 27 16 00-0174	EA	10" x 8" x 6", Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	1,357.14	104.34
26 27 16 00-0175	EA	10" x 10" x 6", Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	1,449.54	104.34
26 27 16 00-0176	EA	12" x 8" x 6", Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	1,653.26	112.80
26 27 16 00-0177	EA	12" x 12" x 6", Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	1,915.13	126.90
26 27 16 00-0178	EA	16" x 6" x 6", Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	1,803.30	121.26
26 27 16 00-0179	EA	18" x 12" x 6", Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	3,513.89	225.60
26 27 16 00-0180	EA	18" x 18" x 6", Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	6,172.36	282.00
26 27 16 00-0181		8" Depth, Screw Cover, Galvanized Cast Iron NEMA 3 Enclosures *(26 27 16 00-0151)*		
26 27 16 00-0182	EA	8" x 8" x 8" Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	1,461.78	107.16
26 27 16 00-0183	EA	12" x 8" x 8" Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	2,213.90	141.01
26 27 16 00-0184	EA	12" x 12" x 8" Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	2,251.64	141.01
26 27 16 00-0185	EA	16" x 12" x 8" Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	3,034.55	211.50
26 27 16 00-0186	EA	18" x 12" x 8" Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	4,038.07	225.60

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 27 16 00-0187	EA	24" x 24" x 8" Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	10,385.47	394.80
26 27 16 00-0188		**10" Depth, Screw Cover, Galvanized Cast Iron NEMA 3 Enclosures** *(26 27 16 00-0151)*		
26 27 16 00-0189	EA	18" x 12" x 10" Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	5,398.96	282.00
26 27 16 00-0190		**12" Depth, Screw Cover, Galvanized Cast Iron NEMA 3 Enclosures** *(26 27 16 00-0151)*		
26 27 16 00-0191	EA	18" x 18" x 12" Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	8,377.87	338.40
26 27 16 00-0192	EA	24" x 12" x 12" Screw Cover, Galvanized Cast Iron NEMA 3 Enclosure	6,865.05	310.20
26 27 16 00-0193		**NEMA 3R Enclosures, Lockable** *(26 27 16)* Note: Rain-tight enclosures.		
26 27 16 00-0194		**Hinged Cover, Galvanized Steel NEMA 3R Enclosures** *(26 27 16 00-0193)*		
26 27 16 00-0195		**4" Depth, Hinged Cover, Galvanized Steel NEMA 3R Enclosures** *(26 27 16 00-0194)*		
26 27 16 00-0196	EA	6" x 4" x 4" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	102.48	22.56
26 27 16 00-0197	EA	6" x 6" x 4" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	113.20	24.82
26 27 16 00-0198	EA	8" x 6" x 4" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	172.92	27.07
26 27 16 00-0199		**6" Depth, Hinged Cover, Galvanized Steel NEMA 3R Enclosures** *(26 27 16 00-0194)*		
26 27 16 00-0200	EA	8" x 8" x 6" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	217.80	33.84
26 27 16 00-0201	EA	10" x 8" x 6" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	243.08	38.35
26 27 16 00-0202	EA	12" x 10" x 6" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	286.41	42.86
26 27 16 00-0203	EA	12" x 12" x 6" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	310.31	45.12
26 27 16 00-0204	EA	16" x 12" x 6" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	404.06	58.66
26 27 16 00-0205	EA	16" x 16" x 6" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	482.04	72.19
26 27 16 00-0206	EA	18" x 18" x 6" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	546.27	90.24
26 27 16 00-0207		**8" Depth, Hinged Cover, Galvanized Steel NEMA 3R Enclosures** *(26 27 16 00-0194)*		
26 27 16 00-0208	EA	24" x 20" x 8" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	841.92	115.05
26 27 16 00-0209	EA	24" x 24" x 8" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	935.69	124.09
26 27 16 00-0210	EA	30" x 24" x 8" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	1,058.23	130.85
26 27 16 00-0211	EA	30" x 30" x 8" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	1,114.30	135.36
26 27 16 00-0212		**10" Depth, Hinged Cover, Galvanized Steel NEMA 3R Enclosures** *(26 27 16 00-0194)*		
26 27 16 00-0213	EA	12" x 48" x 10" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	1,045.51	139.87
26 27 16 00-0214	EA	12" x 54" x 10" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	1,181.08	157.93
26 27 16 00-0215	EA	12" x 60" x 10" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	1,307.44	174.84
26 27 16 00-0216	EA	12" x 66" x 10" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	1,440.77	192.89
26 27 16 00-0217	EA	12" x 72" x 10" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	1,568.26	209.81
26 27 16 00-0218	EA	18" x 18" x 10" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	669.78	110.54
26 27 16 00-0219	EA	24" x 24" x 10" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	1,045.51	139.87
26 27 16 00-0220	EA	30" x 24" x 10" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	1,249.76	144.38
26 27 16 00-0221	EA	36" x 36" x 10" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	1,595.92	157.93
26 27 16 00-0222		**12" Depth, Hinged Cover, Galvanized Steel NEMA 3R Enclosures** *(26 27 16 00-0194)*		
26 27 16 00-0223	EA	12" x 48" x 12" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	1,027.62	111.68
26 27 16 00-0224	EA	12" x 54" x 12" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	1,152.03	125.21
26 27 16 00-0225	EA	12" x 60" x 12" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	1,275.30	138.74
26 27 16 00-0226	EA	12" x 66" x 12" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	1,410.88	153.40
26 27 16 00-0227	EA	12" x 72" x 12" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	1,535.28	166.95
26 27 16 00-0228	EA	18" x 24" x 12" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	767.64	83.47
26 27 16 00-0229	EA	18" x 32" x 12" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	1,027.62	111.68
26 27 16 00-0230	EA	18" x 36" x 12" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	1,152.03	125.21
26 27 16 00-0231	EA	18" x 42" x 12" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	1,356.97	146.64
26 27 16 00-0232	EA	18" x 48" x 12" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	1,535.28	166.95
26 27 16 00-0233	EA	30" x 30" x 12" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	1,455.83	164.69
26 27 16 00-0234	EA	36" x 24" x 12" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	1,535.28	166.95
26 27 16 00-0235	EA	36" x 30" x 12" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	1,619.68	171.46
26 27 16 00-0236	EA	36" x 36" x 12" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	1,810.05	180.48
26 27 16 00-0237	EA	42" x 30" x 12" Hinged Cover, Galvanized Steel NEMA 3R Enclosure	1,966.64	189.50
26 27 16 00-0238		**Screw Cover, Galvanized Steel NEMA 3R Enclosures** *(26 27 16 00-0193)*		
26 27 16 00-0239		**4" Depth, Screw Cover, Galvanized Steel NEMA 3R Enclosures** *(26 27 16 00-0238)*		
26 27 16 00-0240	EA	4" x 4" x 4", Screw Cover, Galvanized Steel NEMA 3R Enclosure	74.23	18.05
26 27 16 00-0241	EA	6" x 4" x 4", Screw Cover, Galvanized Steel NEMA 3R Enclosure	89.17	22.56
26 27 16 00-0242	EA	6" x 6" x 4", Screw Cover, Galvanized Steel NEMA 3R Enclosure	98.52	24.82
26 27 16 00-0243	EA	8" x 6" x 4", Screw Cover, Galvanized Steel NEMA 3R Enclosure	109.58	27.07
26 27 16 00-0244	EA	8" x 8" x 4", Screw Cover, Galvanized Steel NEMA 3R Enclosure	127.14	31.59
26 27 16 00-0245	EA	10" x 8" x 4", Screw Cover, Galvanized Steel NEMA 3R Enclosure	139.02	33.84
26 27 16 00-0246	EA	10" x 10" x 4", Screw Cover, Galvanized Steel NEMA 3R Enclosure	152.09	36.10

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 27 16 00-0247	EA	12" x 8" x 4", Screw Cover, Galvanized Steel NEMA 3R Enclosure	151.29	36.10
26 27 16 00-0248	EA	12" x 10" x 4", Screw Cover, Galvanized Steel NEMA 3R Enclosure	166.20	38.35
26 27 16 00-0249	EA	12" x 12" x 4", Screw Cover, Galvanized Steel NEMA 3R Enclosure	179.27	40.61
26 27 16 00-0250	EA	18" x 12" x 4", Screw Cover, Galvanized Steel NEMA 3R Enclosure	269.47	63.17
26 27 16 00-0251	EA	18" x 18" x 4", Screw Cover, Galvanized Steel NEMA 3R Enclosure	361.76	81.21
26 27 16 00-0252		**6" Depth, Screw Cover, Galvanized Steel NEMA 3R Enclosures** *(26 27 16 00-0238)*		
26 27 16 00-0253	EA	6" x 6" x 6" Screw Cover, Galvanized Steel NEMA 3R Enclosure	101.63	27.07
26 27 16 00-0254	EA	8" x 8" x 6" Screw Cover, Galvanized Steel NEMA 3R Enclosure	141.17	33.84
26 27 16 00-0255	EA	10" x 8" x 6" Screw Cover, Galvanized Steel NEMA 3R Enclosure	159.90	38.35
26 27 16 00-0256	EA	10" x 10" x 6" Screw Cover, Galvanized Steel NEMA 3R Enclosure	174.07	40.61
26 27 16 00-0257	EA	12" x 8" x 6" Screw Cover, Galvanized Steel NEMA 3R Enclosure	172.89	40.61
26 27 16 00-0258	EA	12" x 10" x 6" Screw Cover, Galvanized Steel NEMA 3R Enclosure	188.02	42.86
26 27 16 00-0259	EA	12" x 12" x 6" Screw Cover, Galvanized Steel NEMA 3R Enclosure	203.29	45.12
26 27 16 00-0260	EA	16" x 12" x 6" Screw Cover, Galvanized Steel NEMA 3R Enclosure	265.50	58.66
26 27 16 00-0261	EA	18" x 12" x 6" Screw Cover, Galvanized Steel NEMA 3R Enclosure	303.74	69.94
26 27 16 00-0262	EA	18" x 18" x 6" Screw Cover, Galvanized Steel NEMA 3R Enclosure	407.74	90.24
26 27 16 00-0263	EA	24" x 12" x 6" Screw Cover, Galvanized Steel NEMA 3R Enclosure	423.42	97.01
26 27 16 00-0264	EA	24" x 18" x 6" Screw Cover, Galvanized Steel NEMA 3R Enclosure	489.61	103.78
26 27 16 00-0265	EA	24" x 24" x 6" Screw Cover, Galvanized Steel NEMA 3R Enclosure	554.76	112.80
26 27 16 00-0266		**8" Depth, Screw Cover, Galvanized Steel NEMA 3R Enclosures** *(26 27 16 00-0238)*		
26 27 16 00-0267	EA	12" x 12" x 8", Screw Cover, Galvanized Steel NEMA 3R Enclosure	228.25	49.63
26 27 16 00-0268	EA	18" x 12" x 8", Screw Cover, Galvanized Steel NEMA 3R Enclosure	326.71	76.70
26 27 16 00-0269	EA	18" x 18" x 8", Screw Cover, Galvanized Steel NEMA 3R Enclosure	451.59	99.27
26 27 16 00-0270	EA	24" x 18" x 8", Screw Cover, Galvanized Steel NEMA 3R Enclosure	541.58	115.05
26 27 16 00-0271	EA	24" x 24" x 8", Screw Cover, Galvanized Steel NEMA 3R Enclosure	617.63	124.09
26 27 16 00-0272	EA	30" x 24" x 8", Screw Cover, Galvanized Steel NEMA 3R Enclosure	691.75	130.85
26 27 16 00-0273		**10" Depth, Screw Cover, Galvanized Steel NEMA 3R Enclosures** *(26 27 16 00-0238)*		
26 27 16 00-0274	EA	18" x 18" x 10" Screw Cover, Galvanized Steel NEMA 3R Enclosure	497.37	110.54
26 27 16 00-0275	EA	24" x 24" x 10" Screw Cover, Galvanized Steel NEMA 3R Enclosure	676.42	139.87
26 27 16 00-0276	EA	30" x 24" x 10" Screw Cover, Galvanized Steel NEMA 3R Enclosure	749.36	144.38
26 27 16 00-0277		**12" Depth, Screw Cover, Galvanized Steel NEMA 3R Enclosures** *(26 27 16 00-0238)*		
26 27 16 00-0278	EA	24" x 24" x 12" Screw Cover, Galvanized Steel NEMA 3R Enclosure	748.15	153.40
26 27 16 00-0279	EA	30" x 30" x 12" Screw Cover, Galvanized Steel NEMA 3R Enclosure	1,079.38	166.95
26 27 16 00-0280	EA	36" x 30" x 12" Screw Cover, Galvanized Steel NEMA 3R Enclosure	1,116.41	171.46
26 27 16 00-0281	EA	36" x 36" x 12" Screw Cover, Galvanized Steel NEMA 3R Enclosure	1,321.71	180.48
26 27 16 00-0282		**NEMA 4 Enclosures, Lockable** *(26 27 16)*		
		Note: Water-tight enclosures.		
26 27 16 00-0283		**Hinge Cover, Painted Steel NEMA 4 Enclosures** *(26 27 16 00-0282)*		
26 27 16 00-0284	EA	4" x 4" x 3" Hinge Cover, Painted Steel NEMA 4 Enclosure	122.83	15.79
26 27 16 00-0285	EA	6" x 4" x 3" Hinge Cover, Painted Steel NEMA 4 Enclosure	142.77	19.18
26 27 16 00-0286	EA	8" x 6" x 3.5" Hinge Cover, Painted Steel NEMA 4 Enclosure	178.16	24.82
26 27 16 00-0287	EA	6" x 6" x 4" Hinge Cover, Painted Steel NEMA 4 Enclosure	168.69	24.82
26 27 16 00-0288	EA	10" x 8" x 4" Hinge Cover, Painted Steel NEMA 4 Enclosure	225.00	33.84
26 27 16 00-0289	EA	12" x 10" x 5" Hinge Cover, Painted Steel NEMA 4 Enclosure	281.37	40.61
26 27 16 00-0290	EA	10" x 8" x 6" Hinge Cover, Painted Steel NEMA 4 Enclosure	259.35	38.35
26 27 16 00-0291	EA	12" x 12" x 6" Hinge Cover, Painted Steel NEMA 4 Enclosure	302.08	45.12
26 27 16 00-0292	EA	14" x 12" x 6" Hinge Cover, Painted Steel NEMA 4 Enclosure	356.27	51.88
26 27 16 00-0293	EA	16" x 14" x 6" Hinge Cover, Painted Steel NEMA 4 Enclosure	430.13	65.43
26 27 16 00-0294		**Clamp Cover, Painted Steel NEMA 4 Enclosures** *(26 27 16 00-0282)*		
26 27 16 00-0295	EA	4" x 4" x 3" Clamp Cover, Painted Steel NEMA 4 Enclosure	111.83	15.79
26 27 16 00-0296	EA	6" x 6" x 4" Clamp Cover, Painted Steel NEMA 4 Enclosure	157.71	24.82
26 27 16 00-0297		**Screw Cover, Fiberglass NEMA 4 Or 4x Enclosures** *(26 27 16 00-0282)*		
26 27 16 00-0298	EA	6" x 6" x 4", Screw Cover, Fiberglass NEMA 4 Or 4X Enclosure	139.17	21.66
26 27 16 00-0299	EA	8" x 6" x 4", Screw Cover, Fiberglass NEMA 4 Or 4X Enclosure	147.53	23.47
26 27 16 00-0300	EA	10" x 8" x 6", Screw Cover, Fiberglass NEMA 4 Or 4X Enclosure	179.80	30.68
26 27 16 00-0301	EA	12" x 10" x 6", Screw Cover, Fiberglass NEMA 4 Or 4X Enclosure	211.31	33.84
26 27 16 00-0302	EA	14" x 12" x 8", Screw Cover, Fiberglass NEMA 4 Enclosure	274.30	42.86
26 27 16 00-0303	EA	16" x 14" x 8", Screw Cover, Fiberglass NEMA 4 Enclosure	320.35	50.76
26 27 16 00-0304	EA	18" x 16" x 10", Screw Cover, Fiberglass NEMA 4 Enclosure	444.17	81.21
26 27 16 00-0305		**NEMA 4X Enclosures, Lockable** *(26 27 16)*		
		Note: Water-tight enclosures.		
26 27 16 00-0306		**Clamp Cover, Aluminum NEMA 4X Enclosures** *(26 27 16 00-0305)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 27 16 00-0307	EA	6" x 4" x 3" Clamp Cover, Aluminum NEMA 4X Enclosure	253.81	18.05
26 27 16 00-0308	EA	6" x 6" x 4" Clamp Cover, Aluminum NEMA 4X Enclosure	296.76	24.82
26 27 16 00-0309	EA	10" x 8" x 4" Clamp Cover, Aluminum NEMA 4X Enclosure	374.49	33.84
26 27 16 00-0310	EA	12" x 10" x 5" Clamp Cover, Aluminum NEMA 4X Enclosure	454.96	40.61
26 27 16 00-0311	EA	14" x 12" x 6" Clamp Cover, Aluminum NEMA 4X Enclosure	559.64	51.88
26 27 16 00-0312	EA	16" x 14" x 6" Clamp Cover, Aluminum NEMA 4X Enclosure	657.98	65.43

26 27 16 00-0313 Clamp Cover, 304 Stainless Steel NEMA 4X Enclosures *(26 27 16 00-0305)*

26 27 16 00-0314	EA	4" x 4" x 3", Clamp Cover, 304 Stainless Steel NEMA 4X Enclosure	333.29	15.79
		For 316 Stainless Steel, Add	*47.01*	
26 27 16 00-0315	EA	6" x 4" x 4", Clamp Cover, 304 Stainless Steel NEMA 4X Enclosure	432.35	22.56
		For 316 Stainless Steel, Add	*60.15*	
26 27 16 00-0316	EA	6" x 6" x 4", Clamp Cover, 304 Stainless Steel NEMA 4X Enclosure	490.34	24.82
		For 316 Stainless Steel, Add	*68.53*	
26 27 16 00-0317	EA	8" x 6" x 4", Clamp Cover, 304 Stainless Steel NEMA 4X Enclosure	561.95	27.07
		For 316 Stainless Steel, Add	*79.08*	
26 27 16 00-0318	EA	10" x 8" x 4", Clamp Cover, 304 Stainless Steel NEMA 4X Enclosure	689.83	33.84
		For 316 Stainless Steel, Add	*96.84*	
26 27 16 00-0319	EA	12" x 10" x 6", Clamp Cover, 304 Stainless Steel NEMA 4X Enclosure	972.95	42.86
		For 316 Stainless Steel, Add	*138.53*	
26 27 16 00-0320	EA	14" x 12" x 6", Clamp Cover, 304 Stainless Steel NEMA 4X Enclosure	1,213.80	51.88
		For 316 Stainless Steel, Add	*173.45*	
26 27 16 00-0321	EA	16" x 14" x 6", Clamp Cover, 304 Stainless Steel NEMA 4X Enclosure	1,461.68	65.43
		For 316 Stainless Steel, Add	*207.70*	

26 27 16 00-0322 Screw Cover, Polycarbonate NEMA 4X Enclosures *(26 27 16 00-0305)*

Note: NEMA 3R, 4, 4X and 12 rated.

26 27 16 00-0323	EA	6" x 6" x 4" Screw Cover, Polycarbonate NEMA 4X Enclosure With Opaque Cover	149.35	24.82
26 27 16 00-0324	EA	8" x 6" x 4" Screw Cover, Polycarbonate NEMA 4X Enclosure With Opaque Cover	168.78	27.07
26 27 16 00-0325	EA	8" x 8" x 4" Screw Cover, Polycarbonate NEMA 4X Enclosure With Opaque Cover	192.71	31.59
26 27 16 00-0326	EA	10" x 8" x 4" Screw Cover, Polycarbonate NEMA 4X Enclosure With Opaque Cover	209.84	33.84
26 27 16 00-0327	EA	12" x 10" x 4" Screw Cover, Polycarbonate NEMA 4X Enclosure With Opaque Cover	242.93	38.35
26 27 16 00-0328	EA	10" x 8" x 6" Screw Cover, Polycarbonate NEMA 4X Enclosure With Opaque Cover	226.85	38.35
26 27 16 00-0329	EA	12" x 10" x 6" Screw Cover, Polycarbonate NEMA 4X Enclosure With Opaque Cover	265.64	42.86
26 27 16 00-0330	EA	14" x 12" x 6" Screw Cover, Polycarbonate NEMA 4X Enclosure With Opaque Cover	334.22	51.88
26 27 16 00-0331	EA	16" x 14" x 8" Screw Cover, Polycarbonate NEMA 4X Enclosure With Opaque Cover	423.52	71.07
26 27 16 00-0332	EA	18" x 16" x 10" Screw Cover, Polycarbonate NEMA 4X Enclosure With Opaque Cover	537.54	102.31
26 27 16 00-0333	EA	6" x 6" x 4" Screw Cover, Polycarbonate NEMA 4X Enclosure With Clear Cover	162.00	24.82
26 27 16 00-0334	EA	8" x 6" x 4" Screw Cover, Polycarbonate NEMA 4X Enclosure With Clear Cover	183.73	27.07
26 27 16 00-0335	EA	8" x 8" x 4" Screw Cover, Polycarbonate NEMA 4X Enclosure With Clear Cover	208.79	31.59
26 27 16 00-0336	EA	10" x 8" x 4" Screw Cover, Polycarbonate NEMA 4X Enclosure With Clear Cover	229.36	33.84
26 27 16 00-0337	EA	12" x 10" x 4" Screw Cover, Polycarbonate NEMA 4X Enclosure With Clear Cover	263.61	38.35
26 27 16 00-0338	EA	10" x 8" x 6" Screw Cover, Polycarbonate NEMA 4X Enclosure With Clear Cover	246.39	38.35
26 27 16 00-0339	EA	12" x 10" x 6" Screw Cover, Polycarbonate NEMA 4X Enclosure With Clear Cover	292.14	42.86
26 27 16 00-0340	EA	14" x 12" x 6" Screw Cover, Polycarbonate NEMA 4X Enclosure With Clear Cover	348.00	51.88
26 27 16 00-0341	EA	16" x 14" x 8" Screw Cover, Polycarbonate NEMA 4X Enclosure With Clear Cover	452.25	71.07
26 27 16 00-0342	EA	18" x 16" x 10" Screw Cover, Polycarbonate NEMA 4X Enclosure With Clear Cover	568.55	102.31

26 27 16 00-0343 Hinged Cover, Polycarbonate NEMA 4X Enclosures *(26 27 16 00-0305)*

Note: NEMA 3R, 4, 4X and 12 rated.

26 27 16 00-0344	EA	6" x 6" x 4" Hinged Cover, Polycarbonate NEMA 4X Enclosure With Opaque Cover	184.98	24.82
26 27 16 00-0345	EA	8" x 6" x 4" Hinged Cover, Polycarbonate NEMA 4X Enclosure With Opaque Cover	197.51	27.07
26 27 16 00-0346	EA	8" x 8" x 4" Hinged Cover, Polycarbonate NEMA 4X Enclosure With Opaque Cover	223.72	31.59
26 27 16 00-0347	EA	10" x 8" x 4" Hinged Cover, Polycarbonate NEMA 4X Enclosure With Opaque Cover	242.00	33.84
26 27 16 00-0348	EA	12" x 10" x 4" Hinged Cover, Polycarbonate NEMA 4X Enclosure With Opaque Cover	287.75	38.35
26 27 16 00-0349	EA	10" x 8" x 6" Hinged Cover, Polycarbonate NEMA 4X Enclosure With Opaque Cover	262.48	38.35
26 27 16 00-0350	EA	12" x 10" x 6" Hinged Cover, Polycarbonate NEMA 4X Enclosure With Opaque Cover	325.44	42.86
26 27 16 00-0351	EA	14" x 12" x 6" Hinged Cover, Polycarbonate NEMA 4X Enclosure With Opaque Cover	385.93	51.88
26 27 16 00-0352	EA	16" x 14" x 8" Hinged Cover, Polycarbonate NEMA 4X Enclosure With Opaque Cover	468.33	71.07
26 27 16 00-0353	EA	18" x 16" x 10" Hinged Cover, Polycarbonate NEMA 4X Enclosure With Opaque Cover	596.12	102.31
26 27 16 00-0354	EA	6" x 6" x 4" Hinged Cover, Polycarbonate NEMA 4X Enclosure With Clear Cover	194.17	24.82
26 27 16 00-0355	EA	8" x 6" x 4" Hinged Cover, Polycarbonate NEMA 4X Enclosure With Clear Cover	214.73	27.07
26 27 16 00-0356	EA	8" x 8" x 4" Hinged Cover, Polycarbonate NEMA 4X Enclosure With Clear Cover	239.80	31.59
26 27 16 00-0357	EA	10" x 8" x 4" Hinged Cover, Polycarbonate NEMA 4X Enclosure With Clear Cover	259.23	33.84
26 27 16 00-0358	EA	12" x 10" x 4" Hinged Cover, Polycarbonate NEMA 4X Enclosure With Clear Cover	310.73	38.35
26 27 16 00-0359	EA	10" x 8" x 6" Hinged Cover, Polycarbonate NEMA 4X Enclosure With Clear Cover	281.99	38.35
26 27 16 00-0360	EA	12" x 10" x 6" Hinged Cover, Polycarbonate NEMA 4X Enclosure With Clear Cover	349.58	42.86
26 27 16 00-0361	EA	14" x 12" x 6" Hinged Cover, Polycarbonate NEMA 4X Enclosure With Clear Cover	397.41	51.88
26 27 16 00-0362	EA	16" x 14" x 8" Hinged Cover, Polycarbonate NEMA 4X Enclosure With Clear Cover	506.23	71.07
26 27 16 00-0363	EA	18" x 16" x 10" Hinged Cover, Polycarbonate NEMA 4X Enclosure With Clear Cover	636.34	102.31

26 27 16 00-0364 NEMA 7/9 Enclosures, Lockable *(26 27 16)*

Note: Nominal inside dimensions.

26 27 16 00-0365 4" Depth, Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosures *(26 27 16 00-0364)*

26 27 16 00-0366	EA	6" x 6" x 4" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	1,722.97	126.90
		For Mounting Pan, Add	*77.77*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 27 16 00-0367	EA	6" x 8" x 4" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	1,345.57	135.36
		For Mounting Pan, Add	*144.91*	
26 27 16 00-0368	EA	8" x 10" x 4" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	2,723.22	152.28
		For Mounting Pan, Add	*199.83*	

26 27 16 00-0369 6" Depth, Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosures *(26 27 16 00-0364)*

26 27 16 00-0370	EA	8" x 8" x 6" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	2,407.61	152.28
		For Mounting Pan, Add	*101.61*	
26 27 16 00-0371	EA	8" x 10" x 6" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	3,171.51	156.51
		For Mounting Pan, Add	*199.83*	
26 27 16 00-0372	EA	8" x 12" x 6" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	3,238.00	169.20
		For Mounting Pan, Add	*152.85*	
26 27 16 00-0373	EA	10" x 10" x 6" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	3,326.71	169.20
		For Mounting Pan, Add	*178.84*	
26 27 16 00-0374	EA	10" x 14" x 6" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	4,726.47	211.50
		For Mounting Pan, Add	*234.63*	
26 27 16 00-0375	EA	12" x 12" x 6" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	4,462.84	190.35
		For Mounting Pan, Add	*146.50*	
26 27 16 00-0376	EA	12" x 18" x 6" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	4,605.02	211.50
		For Mounting Pan, Add	*219.21*	
26 27 16 00-0377	EA	12" x 24" x 6" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	7,068.74	380.71
		For Mounting Pan, Add	*294.91*	
26 27 16 00-0378	EA	14" x 14" x 6" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	5,652.67	253.80
		For Mounting Pan, Add	*287.14*	
26 27 16 00-0379	EA	16" x 16" x 6" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	7,344.00	423.01
		For Mounting Pan, Add	*263.61*	
26 27 16 00-0380	EA	18" x 18" x 6" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	8,871.41	423.01
		For Mounting Pan, Add	*428.55*	

26 27 16 00-0381 8" Depth, Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosures *(26 27 16 00-0364)*

26 27 16 00-0382	EA	8" x 12" x 8" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	3,784.80	190.35
		For Mounting Pan, Add	*152.85*	
26 27 16 00-0383	EA	10" x 10" x 8" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	3,812.37	190.35
		For Mounting Pan, Add	*178.84*	
26 27 16 00-0384	EA	10" x 14" x 8" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	4,337.43	190.35
		For Mounting Pan, Add	*234.63*	
26 27 16 00-0385	EA	12" x 12" x 8" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	4,806.22	211.50
		For Mounting Pan, Add	*146.50*	
26 27 16 00-0386	EA	12" x 18" x 8" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	6,926.51	380.71
		For Mounting Pan, Add	*219.21*	
26 27 16 00-0387	EA	12" x 24" x 8" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	8,426.99	465.31
		For Mounting Pan, Add	*294.91*	
26 27 16 00-0388	EA	12" x 36" x 8" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	13,383.69	549.90
		For Mounting Pan, Add	*443.52*	
26 27 16 00-0389	EA	14" x 14" x 8" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	7,550.07	465.31
		For Mounting Pan, Add	*287.14*	
26 27 16 00-0390	EA	16" x 16" x 8" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	7,766.15	465.31
		For Mounting Pan, Add	*263.61*	
26 27 16 00-0391	EA	16" x 24" x 8" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	11,723.42	507.60
		For Mounting Pan, Add	*395.15*	
26 27 16 00-0392	EA	18" x 18" x 8" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	9,645.12	465.31
		For Mounting Pan, Add	*428.55*	
26 27 16 00-0393	EA	18" x 24" x 8" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	12,977.52	507.60
		For Mounting Pan, Add	*626.67*	
26 27 16 00-0394	EA	18" x 30" x 8" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	12,885.78	507.60
		For Mounting Pan, Add	*835.44*	
26 27 16 00-0395	EA	18" x 36" x 8" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	20,097.31	676.80
		For Mounting Pan, Add	*1,044.14*	
26 27 16 00-0396	EA	24" x 24" x 8" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	15,267.14	549.90
		For Mounting Pan, Add	*970.87*	
26 27 16 00-0397	EA	24" x 36" x 8" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	27,784.22	846.00
		For Mounting Pan, Add	*1,329.11*	

26 27 16 00-0398 10" Depth, Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosures *(26 27 16 00-0364)*

26 27 16 00-0399	EA	12" x 36" x 10" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	13,939.53	549.90
		For Mounting Pan, Add	*443.52*	
26 27 16 00-0400	EA	16" x 24" x 10" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	12,830.54	507.60
		For Mounting Pan, Add	*395.15*	
26 27 16 00-0401	EA	18" x 24" x 10" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	13,980.90	549.90
		For Mounting Pan, Add	*626.67*	
26 27 16 00-0402	EA	18" x 36" x 10" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	17,745.16	592.20
		For Mounting Pan, Add	*1,044.14*	
26 27 16 00-0403	EA	24" x 24" x 10" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	15,645.76	592.20
		For Mounting Pan, Add	*970.87*	
26 27 16 00-0404	EA	24" x 36" x 10" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	30,330.60	846.00
		For Mounting Pan, Add	*1,329.11*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 27 16 00-0405		12" Depth, Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosures *(26 27 16 00-0364)*		
26 27 16 00-0406	EA	12" x 24" x 12" Hinged/Bolted Cover, Cast Aluminum Explosion Proof NEMA 7/9 Enclosure	8,625.23	465.31
		For Mounting Pan, Add	*294.91*	
26 27 16 00-0407		Breaker Enclosures *(26 27 16)*		
		See CSI section 26 24 16 00-0001 for lighting and power panel boards.		
26 27 16 00-0408		15 To 100 Amperes, F-Frame Breaker Enclosures *(26 27 16 00-0407)*		
26 27 16 00-0409	EA	NEMA 1, Painted Steel, 15 To 100 Amperes, F-Frame Breaker Enclosure	404.69	90.24
26 27 16 00-0410	EA	NEMA 3R, Painted Steel, 15 To 100 Amperes, F-Frame Breaker Enclosure	773.63	90.24
26 27 16 00-0411	EA	NEMA 3/3R/4/4X/5/12, Stainless Steel, 15 To 100 Amperes, F-Frame Breaker Enclosure	1,945.75	124.09
26 27 16 00-0412	EA	NEMA 7, Cast Aluminum, 15 To 100 Amperes, F-Frame Breaker Enclosure	2,650.43	135.36
26 27 16 00-0413	EA	NEMA 9, Cast Aluminum, 15 To 100 Amperes, F-Frame Breaker Enclosure	1,918.48	135.36
26 27 16 00-0414	EA	NEMA 12, Painted Steel, 15 To 100 Amperes, F-Frame Breaker Enclosure	645.58	124.09
26 27 16 00-0415		15 To 250 Amperes, H Or J-Frame Breaker Enclosures *(26 27 16 00-0407)*		
26 27 16 00-0416	EA	NEMA 1, Painted Steel, 15 To 250 Amperes, H Or J-Frame Breaker Enclosure	653.86	124.09
26 27 16 00-0417	EA	NEMA 3R, Painted Steel, 15 To 250 Amperes, H Or J-Frame Breaker Enclosure	1,244.66	124.09
26 27 16 00-0418	EA	NEMA 3/3R/4/4X/5/12, Stainless Steel, 15 To 250 Amperes, H Or J-Frame Breaker Enclosure	4,355.18	157.93
26 27 16 00-0419	EA	NEMA 12, Painted Steel, 15 To 250 Amperes, H Or J-Frame Breaker Enclosure	1,006.26	157.93
26 27 16 00-0420		125 To 400 Amperes, L-Frame Breaker Enclosures *(26 27 16 00-0407)*		
26 27 16 00-0421	EA	NEMA 1, Painted Steel, 125 To 400 Amperes, L-Frame Breaker Enclosure	1,002.86	248.16
26 27 16 00-0422	EA	NEMA 3R, Painted Steel, 125 To 400 Amperes, L-Frame Breaker Enclosure	2,459.72	248.16
26 27 16 00-0423	EA	NEMA 3/3R/4/4X/5/12, Stainless Steel, 125 To 400 Amperes, L-Frame Breaker Enclosure	7,361.60	315.84
26 27 16 00-0424	EA	NEMA 12, Painted Steel, 125 To 400 Amperes, L-Frame Breaker Enclosure	1,702.81	315.84
26 27 16 00-0425		300 To 800 Amperes, M-Frame Breaker Enclosures *(26 27 16 00-0407)*		
26 27 16 00-0426	EA	NEMA 1, Painted Steel, 300 To 800 Amperes, M-Frame Breaker Enclosure	1,968.98	473.77
26 27 16 00-0427	EA	NEMA 3R, Painted Steel, 300 To 800 Amperes, M-Frame Breaker Enclosure	3,508.80	473.77
26 27 16 00-0428	EA	NEMA 3/3R/4/4X/5/12, Stainless Steel, 300 To 800 Amperes, M-Frame Breaker Enclosure	13,229.44	609.12
26 27 16 00-0429	EA	NEMA 12, Painted Steel, 300 To 800 Amperes, M-Frame Breaker Enclosure	7,052.37	609.12
26 27 16 00-0430		250 To 1,200 Amperes, P-Frame Breaker Enclosures *(26 27 16 00-0407)*		
26 27 16 00-0431	EA	NEMA 1, Painted Steel, 250 To 1,200 Amperes, P-Frame Breaker Enclosure	2,442.32	473.77
26 27 16 00-0432	EA	NEMA 3R, Painted Steel, 250 To 1,200 Amperes, P-Frame Breaker Enclosure	4,257.36	473.77
26 27 16 00-0433	EA	NEMA 3R/5/12, Painted Steel, 250 To 1,200 Amperes, P-Frame Breaker Enclosure	8,926.73	609.12
26 27 16 00-0434		Legend Plates *(26 27 16)*		
26 27 16 00-0435	EA	3" Phenolic Plastic Cabinet Legend Plate Engraved With 1/2" Letters	21.95	5.64
26 27 16 00-0436	EA	3" Engraved Aluminum Cabinet Legend Plate Engraved With 1/2" Letters	34.05	5.64
26 27 19		**Multi-Outlet Assemblies** *(26 27)*		
26 27 19 00-0001		Surface Metal Raceway, Preassembled With Outlets *(26 27 19)*		
		Note: Exposed installations on masonry, concrete block or drywall walls or ceilings. (Wiremold or approved equal).		
26 27 19 00-0002	LF	Single Circuit, Plugmold #2000, 3' With Outlets 6" On Center	28.44	8.23
		For Concrete Or Masonry Surface, Add	*0.82*	
26 27 19 00-0003	LF	Single Circuit, Plugmold #2000, 6' With Outlets 6" On Center	22.15	5.86
		For Concrete Or Masonry Surface, Add	*0.59*	
26 27 19 00-0004	LF	Single Circuit, Plugmold #2000, 6' With Outlets 9" On Center	20.72	6.20
		For Concrete Or Masonry Surface, Add	*0.62*	
26 27 19 00-0005	LF	Single Circuit, Plugmold #2000, 6' With Outlets 12" On Center	23.03	5.86
		For Concrete Or Masonry Surface, Add	*0.59*	
26 27 19 00-0006	LF	Single Circuit, Plugmold #2000, 6' With Outlets 18" On Center	18.44	5.97
		For Concrete Or Masonry Surface, Add	*0.60*	
26 27 19 00-0007	LF	Two Circuits, Plugmold #2000, 6' With Outlets 9" On Center	25.96	5.86
		For Concrete Or Masonry Surface, Add	*0.59*	
26 27 19 00-0008	LF	Two Circuits, Plugmold #2000, 6' With Outlets 12" On Center	22.77	5.86
		For Concrete Or Masonry Surface, Add	*0.59*	
26 27 19 00-0009	LF	Two Circuits, Plugmold #2000, 6' With Outlets 18" On Center	24.69	5.86
		For Concrete Or Masonry Surface, Add	*0.59*	
26 27 23		**Indoor Service Poles** *(26 27)*		
26 27 23 00-0001		Communication And Power Poles *(26 27 23)*		
		Note: Includes separate compartments for power and communication cable. Includes removable cover plates with knock-outs for modular jacks and openings to accept modular furniture adapters for communication devices. Includes all necessary mounting plates and assemblies. Excludes electrical and communications wire, power outlets and communication devices. Wiremold Tele-Power Pole series.		

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 27 23 00-0002		Steel Communication And Power Poles *(26 27 23 00-0001)*		
26 27 23 00-0003		2-1/4" Width, Steel Communication And Power Poles *(26 27 23 00-0002)*		
26 27 23 00-0004		2-1/4" Width, Steel Communication And Power Poles *(26 27 23 00-0003)*		
26 27 23 00-0005	EA	2-1/4" x 2-5/16", 10'-5" Height, Enamel Finish, Steel Communication And Power Pole	343.87	49.98
26 27 23 00-0006	EA	2-1/4" x 2-5/16", 12'-5" Height, Enamel Finish, Steel Communication And Power Pole	375.56	49.98
26 27 23 00-0007	EA	2-1/4" x 2-5/16", 15'-5" Height, Enamel Finish, Steel Communication And Power Pole	412.21	49.98
26 27 23 00-0008		Additional Cover Plates For 2-1/4" Width, Steel Communication And Power Poles *(26 27 23 00-0003)*		
		Note: Excludes receptacles, communication jacks and wiring.		
26 27 23 00-0009	EA	Add-On 2-1/4" Width Steel Cover Plate For Two Duplex Receptacles And One Single Receptacle	70.37	10.31
26 27 23 00-0010	EA	Add-On 2-1/4" Width Steel Cover Plate For Three Duplex Receptacles	60.36	10.31
26 27 23 00-0011	EA	Add-On 2-1/4" Width Steel Cover Plate For Two Duplex Receptacles And One GFCI Receptacle	68.98	10.31
26 27 23 00-0012	EA	Add-On 2-1/4" Width Steel Cover Plate For Data And A/V Modular Devices	49.87	10.31
26 27 23 00-0013	EA	Add-On 2-1/4" Width Steel Cover Plate Radius Control Entrance End Fitting	40.23	10.31
26 27 23 00-0014		2-3/4" Width, Steel Communication And Power Poles *(26 27 23 00-0002)*		
26 27 23 00-0015		2-3/4" Width, Steel Communication And Power Poles *(26 27 23 00-0014)*		
26 27 23 00-0016	EA	2-3/4" x 1-17/32", 10'-5" Height, Enamel Finish, Steel Communication And Power Pole	452.53	49.98
26 27 23 00-0017	EA	2-3/4" x 1-17/32", 12'-5" Height, Enamel Finish, Steel Communication And Power Pole	520.64	49.98
26 27 23 00-0018	EA	2-3/4" x 1-17/32", 15'-5" Height, Enamel Finish, Steel Communication And Power Pole	557.39	49.98
26 27 23 00-0019		Additional Cover Plates For 2-3/4" Width, Steel Communication And Power Poles *(26 27 23 00-0014)*		
		Note: Excludes receptacles and communication jacks.		
26 27 23 00-0020	EA	Add-On 2-3/4" Width Steel Cover Plate For One Single Receptacle	45.62	10.31
26 27 23 00-0021	EA	Add-On 2-3/4" Width Steel Cover Plate For One Duplex Receptacle	40.53	10.31
26 27 23 00-0022	EA	Add-On 2-3/4" Width Steel Cover Plate For Data And A/V Modular Devices	44.17	10.31
26 27 23 00-0023		3" Width, Steel Communication And Power Poles *(26 27 23 00-0002)*		
26 27 23 00-0024		3" Width, Steel Communication And Power Poles *(26 27 23 00-0023)*		
26 27 23 00-0025	EA	3" x 2-3/4", 10'-5" Height, Enamel Finish, Steel Communication And Power Pole	596.85	49.98
26 27 23 00-0026	EA	3" x 2-3/4", 12'-5" Height, Enamel Finish, Steel Communication And Power Pole	678.82	49.98
26 27 23 00-0027	EA	3" x 2-3/4", 15'-5" Height, Enamel Finish, Steel Communication And Power Pole	732.86	49.98
26 27 23 00-0028		Additional Cover Plates For 3" Width, Steel Communication And Power Poles *(26 27 23 00-0023)*		
		Note: Excludes receptacles and communication jacks.		
26 27 23 00-0029	EA	Add-On 3" Width Steel Steel Cover Plate For One Single Receptacle	45.62	10.31
26 27 23 00-0030	EA	Add-On 3" Width Steel Cover Plate For One Duplex Receptacle	40.53	10.31
26 27 23 00-0031	EA	Add-On 3" Width Steel Cover Plate For Data And A/V Modular Devices	44.17	10.31
26 27 23 00-0032		Aluminum Communication And Power Poles *(26 27 23 00-0001)*		
26 27 23 00-0033		2-1/8" Width, Aluminum Communication And Power Poles *(26 27 23 00-0032)*		
26 27 23 00-0034		2-1/8" Width, Aluminum Communication And Power Poles *(26 27 23 00-0033)*		
26 27 23 00-0035	EA	2-1/8" x 2-3/8", 10'-5" Height, Satin Anodized Finish, Aluminum Communication And Power Pole	473.86	49.98
26 27 23 00-0036	EA	2-1/8" x 2-3/8", 12'-5" Height, Satin Anodized Finish, Aluminum Communication And Power Pole	531.17	49.98
26 27 23 00-0037	EA	2-1/8" x 2-3/8", 15'-5" Height, Satin Anodized Finish, Aluminum Communication And Power Pole	595.42	49.98
26 27 23 00-0038		Additional Cover Plates For 2-1/8" Width, Aluminum Communication And Power Poles *(26 27 23 00-0033)*		
26 27 23 00-0039	EA	Add-On 2-1/8" Width Aluminum Cover Plate For Two Duplex Receptacles And One Single Receptacle	72.32	10.31
26 27 23 00-0040	EA	Add-On 2-1/8" Width Aluminum Cover Plate For Three Duplex Receptacles	73.94	10.31
26 27 23 00-0041	EA	Add-On 2-1/8" Width Aluminum Cover Plate For Two Duplex Receptacles And One GFCI Receptacle	79.33	10.31
26 27 23 00-0042	EA	Add-On 2-1/8" Width Aluminum Cover Plate For Data And A/V Modular Devices	52.89	10.31
26 27 23 00-0043	EA	Add-On 2-1/8" Width Aluminum Radius Control Entrance End Fitting	40.23	10.31
26 27 23 00-0044		2-1/4" Width, Aluminum Communication And Power Poles *(26 27 23 00-0032)*		
26 27 23 00-0045	EA	2-1/4" x 2-5/16", 10'-2" Height, Satin Anodized Finish, Aluminum Communication And Power Pole	455.96	49.98
26 27 23 00-0046	EA	2-1/4" x 2-5/16", 12'-8" Height, Satin Anodized Finish, Aluminum Communication And Power Pole	514.74	49.98
26 27 23 00-0047	EA	2-1/4" x 2-5/16", 15'-2" Height, Satin Anodized Finish, Aluminum Communication And Power Pole	583.99	49.98
26 27 23 00-0048		5" Width, Aluminum Communication And Power Poles *(26 27 23 00-0032)*		
26 27 23 00-0049	EA	5" x 4-3/4", 10'-2" Height, Satin Anodized Finish, Aluminum Communication And Power Pole	979.53	49.98
26 27 23 00-0050	EA	5" x 4-3/4", 12'-8" Height, Satin Anodized Finish, Aluminum Communication And Power Pole	1,123.69	49.98

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 27 23 00-0051	EA	5" x 4-3/4", 15'-2" Height, Satin Anodized Finish, Aluminum Communication And Power Pole	1,285.16	49.98
26 27 23 00-0052		**2" Diameter, Round Aluminum Communication And Power Pole** *(26 27 23 00-0032)*		
26 27 23 00-0053	EA	2" Diameter, 10'-4" Height, Satin Anodized Finish, Aluminum Communication And Power Pole	521.66	49.98
26 27 23 00-0054	EA	2" Diameter, 10'-4" Height, Painted White Finish, Aluminum Communication And Power Pole	492.61	49.98
26 27 23 00-0055	EA	2" Diameter, 10'-4" Height, Polished Anodized Finish, Aluminum Communication And Power Pole	637.60	49.98
26 27 26		**Wiring Devices** *(26 27)*		
		Note: Includes device, installation, wire connections, support clips (where necessary) and testing. Assemblies include outlet device, cover plate, mounting and appropriate box.		
26 27 26 00-0001		**Receptacles** *(26 27 26)*		
26 27 26 00-0002		**General Use Receptacles** *(26 27 26 00-0001)*		
26 27 26 00-0003		**Receptacle Assemblies** *(26 27 26 00-0002)*		
		Note: Includes 4" square steel box, bracket, mud ring, receptacle and cover plate.		
26 27 26 00-0004	EA	15 Amperes, 1 Gang, NEMA 5-15, Duplex Receptacle Assembly	91.73	40.05
26 27 26 00-0005	EA	20 Amperes, 1 Gang, NEMA 5-20, Duplex Receptacle Assembly	98.70	42.86
26 27 26 00-0006	EA	15 Amperes, 2 Gang, NEMA 5-15, Duplex Receptacle Assembly	119.32	51.32
26 27 26 00-0007	EA	20 Amperes, 2 Gang, NEMA 5-20, Duplex Receptacle Assembly	133.29	56.97
26 27 26 00-0008	EA	15 Amperes, 1 Gang, GFI, Duplex Receptacle Assembly	109.86	40.05
26 27 26 00-0009	EA	20 Amperes, 1 Gang, GFI, Duplex Receptacle Assembly	117.79	42.86
26 27 26 00-0010		**Receptacle Components** *(26 27 26 00-0002)*		
26 27 26 00-0011	EA	15 Amperes, 125 Volt, 1 Phase, NEMA 5-15, Single Receptacle	27.51	11.28
26 27 26 00-0012	EA	15 Amperes, 125 Volt, 1 Phase, NEMA 5-15, Duplex Receptacle	26.45	11.28
26 27 26 00-0013	EA	15 Amperes, 120/277 Volt, 3 Wire, Single Receptacle	32.68	11.28
26 27 26 00-0014	EA	15 Amperes, 120/277 Volt, 3 Wire, Duplex Receptacle	36.29	11.28
26 27 26 00-0015	EA	15 Amperes, 250 Volt, 1 Phase, NEMA 6-15, Single Receptacle	46.52	14.10
26 27 26 00-0016	EA	15 Amperes, 250 Volt, 1 Phase, NEMA 6-15, Duplex Receptacle	58.36	14.10
26 27 26 00-0017	EA	20 Amperes, 125 Volt, 1 Phase, NEMA 5-20, Single Receptacle	28.90	11.28
26 27 26 00-0018	EA	20 Amperes, 125 Volt, 1 Phase, NEMA 5-20, Duplex Receptacle	27.78	11.28
26 27 26 00-0019	EA	20 Amperes, 120/277 Volt, Single Receptacle	44.04	11.28
26 27 26 00-0020	EA	20 Amperes, 120/277 Volt, Duplex Receptacle	35.15	11.28
26 27 26 00-0021	EA	20 Amperes, 250 Volt, 1 Phase, NEMA 6-20, Single Receptacle	46.52	14.10
26 27 26 00-0022	EA	20 Amperes, 250 Volt, 1 Phase, NEMA 6-20, Duplex Receptacle	58.36	14.10
26 27 26 00-0023	EA	20 Amperes, 125/250 Volt, 1 Phase, NEMA 14-20, Single Receptacle	96.35	14.10
26 27 26 00-0024	EA	20 Amperes, 250 Volt, 3 Phase, NEMA 15-20, Single Receptacle	96.35	14.10
26 27 26 00-0025	EA	25 Amperes, 120/277 Volt, Duplex Receptacle	77.61	16.92
26 27 26 00-0026		**Specialty Receptacles** *(26 27 26 00-0001)*		
26 27 26 00-0027		**Specialty Receptacles** *(26 27 26 00-0026)*		
26 27 26 00-0028	EA	30 Amperes, 125 Volt, 1 Phase, NEMA 5-30, Single Receptacle	66.36	19.74
26 27 26 00-0029	EA	30 Amperes, 250 Volt, 1 Phase, NEMA 6-30, Single Receptacle	66.36	19.74
26 27 26 00-0030	EA	30 Amperes, 125/250 Volt, NEMA 10-30, Single Receptacles	83.66	19.74
26 27 26 00-0031	EA	30 Amperes, 125/250 Volt, 1 Phase, NEMA 14-30, Single Receptacle	107.63	19.74
26 27 26 00-0032	EA	30 Amperes, 250 Volt, 3 Phase, NEMA 15-30, Single Receptacle	113.27	22.56
26 27 26 00-0033	EA	50 Amperes, 125 Volt, 1 Phase, NEMA 5-50, Single Receptacle	103.42	22.56
26 27 26 00-0034	EA	50 Amperes, 250 Volt, 1 Phase, NEMA 6-50, Single Receptacle	100.65	22.56
26 27 26 00-0035	EA	50 Amperes, 277 Volt, NEMA 7-50, Single Receptacle	86.34	22.56
26 27 26 00-0036	EA	50 Amperes, 125/250 Volt, NEMA 10-50, Single Receptacle	101.70	22.56
26 27 26 00-0037	EA	50 Amperes, 125/250 Volt, 1 Phase, NEMA 14-50, Single Receptacle	128.41	22.56
26 27 26 00-0038	EA	50 Amperes, 250 Volt, 3 Phase, NEMA 15-50, Single Receptacle	134.05	25.38
26 27 26 00-0039	EA	60 Amperes, 125/250 Volt, 1 Phase, NEMA 14-60, Single Receptacle	147.26	28.20
26 27 26 00-0040	EA	60 Amperes, 250 Volt, 3 Phase, NEMA 15-60, Single Receptacle	158.54	33.84
26 27 26 00-0041	EA	100 Amperes, 480 Volt, 3 Phase, Joy Receptacle With Box, Complete	1,541.38	265.08
26 27 26 00-0042	EA	400 Amperes, 4 Pole Weatherproof Generator Receptacle With Box, Complete	3,998.29	324.30
26 27 26 00-0043	EA	30 Amperes, 230 Volt, Dryer Receptacle	79.88	22.56
26 27 26 00-0044	EA	60 Amperes, 230 Volt, Range Receptacle	116.37	33.84
26 27 26 00-0045	EA	15 Or 20 Amperes, 120/277 Volt, Clock Hanger Receptacle	79.94	14.10
26 27 26 00-0046	EA	Cable Reel With 20 Amperes, 120 Volt Receptacle, Complete	1,571.94	343.47
26 27 26 00-0047		**Isolated Ground Receptacles** *(26 27 26 00-0026)*		
26 27 26 00-0048	EA	15 Amperes, 125 Volt, NEMA 5-15R Isolated Ground Receptacle, Simplex Note: 2 Pole, 3 wire.	96.46	11.28
26 27 26 00-0049	EA	20 Amperes, 120 Volt Isolated Ground Receptacles, Simplex	66.46	14.10
26 27 26 00-0050	EA	20 Amperes, 120 Volt Isolated Ground Receptacles, Duplex	66.19	14.10
26 27 26 00-0051	EA	30 Amperes, 120 Volt Isolated Ground Receptacles, Simplex	89.95	22.56
26 27 26 00-0052	EA	Locking 15 Amperes, 250 Volt Isolated Ground Receptacles	75.58	14.10
26 27 26 00-0053	EA	Locking 15 Amperes, 277 Volt Isolated Ground Receptacles	68.48	14.10
26 27 26 00-0054	EA	Locking 20 Amperes, 120/208 Volt Isolated Ground Receptacles	96.31	16.92
26 27 26 00-0055	EA	Locking 20 Amperes, 277/480 Volt Isolated Ground Receptacles	74.22	16.92
26 27 26 00-0056	EA	Locking 20 Amperes, 347/600 Volt Isolated Ground Receptacles	98.93	16.92
26 27 26 00-0057	EA	Locking 30 Amperes, 120/208 Volt Isolated Ground Receptacles	123.01	16.92
26 27 26 00-0058	EA	Locking 30 Amperes, 277 Volt Isolated Ground Receptacles	117.31	22.56

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 27 26 00-0059		**Explosion Proof Receptacle Assembly** *(26 27 26 00-0026)*		
26 27 26 00-0060	EA	1/2", 20 Amperes, 2 Watt, 3 Pole, Type CPS Explosion Proof Receptacle Assembly	1,002.93	28.20
26 27 26 00-0061	EA	3/4", 20 Amperes, 2 Watt, 3 Pole, Type CPS Explosion Proof Receptacle Assembly	921.98	31.02
26 27 26 00-0062	EA	3/4", 30 Amperes, 2 Watt, 3 Pole, Type CES/CESD Explosion Proof Receptacle Assembly	1,530.86	56.40
26 27 26 00-0063	EA	3/4", 30 Amperes, 3 Watt, 4 Pole, Type CES/CESD Explosion Proof Receptacle Assembly	1,934.45	56.40
26 27 26 00-0064	EA	1-1/4", 60 Amperes, 2 Watt, 4 Pole, Type CES/CESD Explosion Proof Receptacle Assembly	2,442.30	84.60
26 27 26 00-0065	EA	1-1/4", 60 Amperes, 3 Watt, 4 Pole, Type CES/CESD Explosion Proof Receptacle Assembly	2,325.45	84.60
26 27 26 00-0066		**Ground Fault Circuit Interrupter (GFCI)** *(26 27 26 00-0026)*		
26 27 26 00-0067	EA	15 Amperes, Ground Fault Circuit Interrupter (GFCI), Duplex Receptacle	41.76	14.10
26 27 26 00-0068	EA	20 Amperes, Ground Fault Circuit Interrupter (GFCI), Duplex Receptacle	58.16	16.92
26 27 26 00-0069	EA	15 Amperes, 120 Volt, Ground Fault Circuit Interrupter (GFCI), Weatherproof Duplex Receptacle	44.89	19.21
26 27 26 00-0070	EA	20 Amperes, 120 Volt, Ground Fault Circuit Interrupter (GFCI), Weatherproof Duplex Receptacle	76.75	22.56
26 27 26 00-0071		**Arc Fault Circuit Interrupter (AFCI)** *(26 27 26 00-0026)*		
26 27 26 00-0072	EA	15 Amperes, 125 Volt Duplex Arc Fault Circuit Interrupter (AFCI), Tamper Resistant Receptacle	81.29	14.10
26 27 26 00-0073	EA	20 Amperes, 125 Volt Duplex Arc Fault Circuit Interrupter (AFCI), Tamper Resistant Receptacle	90.08	14.10
26 27 26 00-0074		**Locking Receptacle** *(26 27 26 00-0026)*		
26 27 26 00-0075	EA	NEMA L5-15, 125 Volt, 2 Pole, 15 Amperes, Locking Receptacle	55.95	14.10
26 27 26 00-0076	EA	NEMA L6-15, 250 Volt, 2 Pole, 15 Amperes, Locking Receptacle	70.35	14.10
26 27 26 00-0077	EA	NEMA L5-20, 125 Volt, 2 Pole, 20 Amperes, Locking Receptacle	61.42	16.92
26 27 26 00-0078	EA	NEMA L6-20, 250 Volt, 2 Pole, 20 Amperes, Locking Receptacle	60.79	16.92
26 27 26 00-0079	EA	NEMA L8-20, 480 Volt, 2 Pole, 20 Amperes, Locking Receptacle	73.46	16.92
26 27 26 00-0080	EA	NEMA L9-20, 600 Volt, 2 Pole, 20 Amperes, Locking Receptacle	89.83	16.92
26 27 26 00-0081	EA	NEMA L10-20, 125/250 Volt, 3 Pole, 20 Amperes, Locking Receptacle	88.02	16.92
26 27 26 00-0082	EA	NEMA L14-20, 125/250 Volt, 3 Pole, 20 Amperes, Locking Receptacle	76.05	16.92
26 27 26 00-0083	EA	NEMA L5-30, 125 Volt, 2 Pole, 30 Amperes, Locking Receptacle	85.17	22.56
26 27 26 00-0084	EA	NEMA L6-30, 250 Volt, 2 Pole, 30 Amperes, Locking, Receptacle	86.69	22.56
26 27 26 00-0085	EA	NEMA L15-30, 250 Volt, 3 Pole, 30 Amperes, Locking Receptacle	127.06	22.56
26 27 26 00-0086		**Hospital Grade Receptacle** *(26 27 26 00-0026)*		
26 27 26 00-0087	EA	15 Amperes, Heavy-Duty Hospital Grade, NEMA 5-15, Duplex Receptacle	57.61	11.28
26 27 26 00-0088	EA	20 Amperes, Heavy-Duty Hospital Grade, NEMA 5-20, Duplex Receptacle	63.08	11.28
26 27 26 00-0089	EA	20 Amperes, Heavy-Duty Hospital Grade, NEMA 5-20, Duplex Receptacle, Isolated Ground	73.42	11.28
26 27 26 00-0090	EA	20 Amperes, Extra Heavy-Duty Hospital Grade, NEMA 5-20, Duplex Receptacle	63.86	11.28
26 27 26 00-0091	EA	20 Amperes, Extra Heavy-Duty Hospital Grade, NEMA 5-20, Duplex Receptacle, Isolated Ground	74.56	11.28
26 27 26 00-0092	EA	20 Amperes, Non-Magnetic MRI Hospital Grade, NEMA 5-20, Duplex Receptacle	82.86	11.28
26 27 26 00-0093	EA	120 Volt, Transient Voltage, Surge Suppresser Receptacle Note: Hospital grade receptacle.	181.78	33.84
26 27 26 00-0094		**Weathertight Pin And Sleeve Receptacle** *(26 27 26 00-0026)*		
26 27 26 00-0095	EA	20 Amperes, 2 Pole, 3 Wire, 125 Volt, Watertight Pin And Sleeve Receptacle (Hubbell 320R4W)	284.15	56.40
26 27 26 00-0096	EA	20 Amperes, 2 Pole, 3 Wire, 250 Volt, Watertight Pin And Sleeve Receptacle (Hubbell 320R6W)	283.44	56.40
26 27 26 00-0097	EA	20 Amperes, 2 Pole, 3 Wire, 480 Volt, Watertight Pin And Sleeve Receptacle (Hubbell 320R7W)	296.80	56.40
26 27 26 00-0098	EA	20 Amperes, 3 Pole, 4 Wire, 125/250 Volt, Watertight Pin And Sleeve Receptacle (Hubbell 420R12W)	364.77	62.04
26 27 26 00-0099	EA	20 Amperes, 3 Pole, 4 Wire, 250 Volt, Watertight Pin And Sleeve Receptacle (Hubbell 420R9W)	365.88	62.04
26 27 26 00-0100	EA	20 Amperes, 3 Pole, 4 Wire, 480 Volt, Watertight Pin And Sleeve Receptacle (Hubbell 420R7W)	363.31	62.04
26 27 26 00-0101	EA	30 Amperes, 2 Pole, 3 Wire, 125 Volt, Watertight Pin And Sleeve Receptacle (Hubbell 330R4W)	437.39	69.37
26 27 26 00-0102	EA	30 Amperes, 2 Pole, 3 Wire, 250 Volt, Watertight Pin And Sleeve Receptacle (Hubbell 330R6W)	415.66	69.37
26 27 26 00-0103	EA	30 Amperes, 2 Pole, 3 Wire, 480 Volt, Watertight Pin And Sleeve Receptacle (Hubbell 330R7W)	449.68	69.37
26 27 26 00-0104	EA	30 Amperes, 3 Pole, 4 Wire, 125/250 Volt, Watertight Pin And Sleeve Receptacle (Hubbell 430R12W)	451.85	76.14
26 27 26 00-0105	EA	30 Amperes, 3 Pole, 4 Wire, 250 Volt, Watertight Pin And Sleeve Receptacle (Hubbell 430R9W)	451.42	76.14
26 27 26 00-0106	EA	30 Amperes, 3 Pole, 4 Wire, 480 Volt, Watertight Pin And Sleeve Receptacle (Hubbell 430R7W)	454.50	76.14
26 27 26 00-0107	EA	60 Amperes, 2 Pole, 3 Wire, 125 Volt, Watertight Pin And Sleeve Receptacle (Hubbell 360R4W)	642.27	90.24
26 27 26 00-0108	EA	60 Amperes, 2 Pole, 3 Wire, 250 Volt, Watertight Pin And Sleeve Receptacle (Hubbell 360R6W)	615.95	90.24
26 27 26 00-0109	EA	60 Amperes, 2 Pole, 3 Wire, 480 Volt, Watertight Pin And Sleeve Receptacle (Hubbell 360R7W)	633.08	90.24
26 27 26 00-0110	EA	60 Amperes, 3 Pole, 4 Wire, 125/250 Volt, Watertight Pin And Sleeve Receptacle (Hubbell 460R12W)	705.06	100.39
26 27 26 00-0111	EA	60 Amperes, 3 Pole, 4 Wire, 250 Volt, Watertight Pin And Sleeve Receptacle (Hubbell 460R9W)	705.57	100.39
26 27 26 00-0112	EA	60 Amperes, 3 Pole, 4 Wire, 480 Volt, Watertight Pin And Sleeve Receptacle (Hubbell 460R7W)	706.08	100.39
26 27 26 00-0113	EA	100 Amperes, 2 Pole, 3 Wire, 250 Volt, Watertight Pin And Sleeve Receptacle (Hubbell 3100R6W)	784.34	112.80
26 27 26 00-0114	EA	100 Amperes, 2 Pole, 3 Wire, 480 Volt, Watertight Pin And Sleeve Receptacle (Hubbell 3100R7W)	818.08	112.80
26 27 26 00-0115	EA	100 Amperes, 3 Pole, 4 Wire, 125/250 Volt, Watertight Pin And Sleeve Receptacle (Hubbell 4100R12W)	879.07	124.09
26 27 26 00-0116	EA	100 Amperes, 3 Pole, 4 Wire, 250 Volt, Watertight Pin And Sleeve Receptacle (Hubbell 4100R9W)	876.53	124.09
26 27 26 00-0117	EA	100 Amperes, 3 Pole, 4 Wire, 480 Volt, Watertight Pin And Sleeve Receptacle (Hubbell 4100R7W)	881.30	124.09
26 27 26 00-0118		**Corrosion Resistant Receptacle** *(26 27 26 00-0026)*		
26 27 26 00-0119	EA	15/20 Amperes, 125 Volt Corrosion Resistant, Power Receptacles	85.76	11.28
26 27 26 00-0120	EA	15/20 Amperes, 250 Volt Corrosion Resistant, Power Receptacles	177.55	14.10
26 27 26 00-0121		**Tamper Resistant Receptacle** *(26 27 26 00-0026)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 27 26 00-0122	EA	15 Amperes, 125 Volt Duplex Tamper Resistant Receptacle Note: Pass & Seymour 3232-TR.	28.74	11.28
26 27 26 00-0123	EA	20 Amperes, 125 Volt Duplex Tamper Resistant Receptacle Note: Pass & Seymour TR20.	31.92	11.28
26 27 26 00-0124	EA	15 Amperes, 125 Volt Single Specification Grade Tamper Resistant Receptacle Note: Pass & Seymour TR5251.	41.06	11.28
26 27 26 00-0125	EA	20 Amperes, 125 Volt Single Specification Grade Tamper Resistant Receptacle Note: Pass & Seymour TR5351.	45.34	11.28
26 27 26 00-0126	EA	15 Amperes, 125 Volt Duplex Ground Fault Circuit Interrupter (GFCI), Tamper Resistant Receptacle Note: Pass & Seymour S1595-TR*CC8.	71.07	11.28
26 27 26 00-0127	EA	15 Amperes, 125 Volt Duplex Ground Fault Circuit Interrupter (GFCI), Specification Grade Tamper Resistant Receptacle Note: Pass & Seymour 1595-TRS.	77.20	11.28
26 27 26 00-0128	EA	20 Amperes, 125 Volt Duplex Ground Fault Circuit Interrupter (GFCI), Specification Grade Tamper Resistant Receptacle Note: Pass & Seymour 2095-TRS.	83.06	11.28
26 27 26 00-0129		**USB Charger/Duplex Tamper-Resistant Receptacles** *(26 27 26 00-0026)*		
26 27 26 00-0130	EA	15 Amperes, 125 Volt Duplex USB Charger/Duplex Tamper-Resistant Receptacle	73.31	11.28
26 27 26 00-0131	EA	20 Amperes, 125 Volt Duplex USB Charger/Duplex Tamper-Resistant Receptacle	79.65	11.28
26 27 26 00-0132		**Television Receptacle** *(26 27 26 00-0001)*		
26 27 26 00-0133	EA	TV Receptacle With Cover (Type F), Complete	78.97	26.17
26 27 26 00-0134		**Switches** *(26 27 26)*		
26 27 26 00-0135		**Switches** *(26 27 26 00-0134)*		
26 27 26 00-0136		**Switch Assemblies** *(26 27 26 00-0135)* Note: Includes 4" square steel box, bracket, mud ring, switch and cover plate.		
26 27 26 00-0137	EA	1 Gang, 15 Amperes, 120/277 Volt, SPST, Switch Assembly	96.43	39.48
26 27 26 00-0138	EA	1 Gang, 20 Amperes, 120/277 Volt, SPST, Switch Assembly	103.85	42.86
26 27 26 00-0139	EA	2 Gang, 15 Amperes, 120/277 Volt, SPST, Switch Assembly	131.55	51.60
26 27 26 00-0140	EA	2 Gang, 20 Amperes, 120/277 Volt, SPST, Switch Assembly	144.14	57.25
26 27 26 00-0141	EA	3 Gang, 15 Amperes, 120/277 Volt, SPST, Switch Assembly	223.52	88.55
26 27 26 00-0142	EA	3 Gang, 20 Amperes, 120/277 Volt, SPST, Switch Assembly	242.41	97.01
26 27 26 00-0143	EA	4 Gang, 15 Amperes, 120/277 Volt, SPST, Switch Assembly	258.97	100.11
26 27 26 00-0144	EA	4 Gang, 20 Amperes, 120/277 Volt, SPST, Switch Assembly	284.15	111.39
26 27 26 00-0145		**Switch Components** *(26 27 26 00-0135)*		
26 27 26 00-0146	EA	15 Amperes, 120/277 Volt, SPST Switch	32.28	11.28
26 27 26 00-0147	EA	15 Amperes, 120/277 Volt, 3-Way Switch	40.97	14.10
26 27 26 00-0148	EA	15 Amperes, 120/277 Volt, 4-Way Switch	82.17	22.56
26 27 26 00-0149	EA	15 Amperes, 120/277 Volt, DPST Switch	37.93	11.28
26 27 26 00-0150	EA	15 Amperes, 120/277 Volt, Thermal Switch	76.51	14.10
26 27 26 00-0151	EA	20 Amperes, 120/277 Volt, SPST Switch	38.57	14.10
26 27 26 00-0152	EA	20 Amperes, 120/277 Volt, 3-Way Switch	48.03	16.92
26 27 26 00-0153	EA	20 Amperes, 120/277 Volt, 4-Way Switch	115.79	22.56
26 27 26 00-0154	EA	20 Amperes, 120/277 Volt, DPST Switch	47.63	14.10
26 27 26 00-0155	EA	20 Amperes, 120/277 Volt, DPDT Switch	51.65	14.10
26 27 26 00-0156	EA	15 Amperes, 120/277 Volt, Single Pole, Toggle, Three Position, Center Off, Momentary Contact Switch	90.04	14.13
26 27 26 00-0157	EA	15 Amperes, 120/277 Volt, Key Operated, Single Pole, Three Position, Center Off, Momentary Contact Switch	114.26	14.13
26 27 26 00-0158	EA	Momentary Contact Switch With Separate Neon Pilot Note: Neon Pilot is 125 V, 1 / 125W.	85.93	16.95
26 27 26 00-0159	EA	20 Amperes, 125 Volt AC, Single Pole, Maintained Contact Switch With Center Off Note: Or 250 VAC 10 Amp, double throw BAT handle.	59.61	19.74
26 27 26 00-0160	EA	20 Amperes, 125 Volt AC, Double Pole, Maintained Contact Switch Note: Or 250 VAC 10 Amp, with center off double throw BAT handle.	74.44	22.56
26 27 26 00-0161	EA	20 Amperes, 125 Volt AC, Three Pole, Maintained Contact Switch Note: Or 250 VAC 10 Amp, with center off double throw BAT handle.	115.88	22.56
26 27 26 00-0162	EA	30 Amperes, 120/277 Volt, Single Pole, Local Switch	88.72	22.60
26 27 26 00-0163	EA	30 Amperes, 120/277 Volt, Double Pole, Local Switch	110.49	22.60
26 27 26 00-0164	EA	30 Amperes, 120/277 Volt, Three-Way Local Switch	114.55	28.25
26 27 26 00-0165	EA	30 Amperes, 120/277 Volt, Four-Way Local Switch	161.72	31.08
26 27 26 00-0166	EA	15 Amperes, 120/277 Volt, Local Switch With Neon Pilot	72.74	18.48
26 27 26 00-0167	EA	15 Amperes, 120/277 Volt, Local Switch With Separate Neon Pilot Note: Neon pilot is 125V, 1/25W. Requires 2 gang installation.	105.93	18.48
26 27 26 00-0168	EA	15 Amperes, 120 Volt, Clear Toggle, Lighted In On Position, Single Pole, Lighted Toggle Switch	91.62	18.48
26 27 26 00-0169	EA	15 Amperes, 120 Volt, Ivory Toggle, Lighted In Off Position, Lighted Toggle Switch	86.70	18.48
26 27 26 00-0170	EA	6 Amperes, 125 Volt, Door Open-Light On, Automatic Door Switch	100.77	9.16
26 27 26 00-0171	EA	6 Amperes, 125 Volt, Door Closed-Light On, Automatic Door Switch	107.44	9.16
26 27 26 00-0172	EA	15 Amperes, 120/277 Volt, Three Position, Center Off, Toggle, Single Pole Momentary Contact Switch	111.17	35.26
26 27 26 00-0173	EA	Three Position, Center Off, Key Operated, Momentary Contact Switch Note: 15A, 120/277 V, Single Pole	135.39	35.26
26 27 26 00-0174	EA	Single Pole, Slide Dimmer (Leviton IP710-LFZ)	165.49	11.30
26 27 26 00-0175	EA	8 Amperes, 120/277 Volt, 0 To 10 Volt Dimmer LED Control Switch, White (Lutron DVSTV-WH)	89.14	11.30
26 27 26 00-0176	EA	120/277 Volt, (8 Amperes Lighting/3 Amperes Fan), Wireless Dimming Switch (Lutron MRF2-8S-DV-WH)	283.01	11.28
26 27 26 00-0177	EA	120 Volt, Companion Wireless Dimmer Switch (Lutron MA-AS-WH)	48.70	11.28

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 27 26 00-0178	EA	1200VA 0-10V LED And Fluorescent, Sunrise Electronic Wall Dimmer (Philips SR1200ZTUNV)	95.29	11.30
26 27 26 00-0179	EA	1 Zone, 2 Button Wireless Scheduling Switch (LG 9SSA2B1T520.ALWB000)	110.02	11.30
26 27 26 00-0180	EA	2 Zone, 4 Button Wireless Scheduling Switch (LG 9SSA2B2T520.ALWB000)	142.15	11.30
26 27 26 00-0181	EA	Wireless Single Rocker Remote Switch (Leviton WSS0S-S9)	170.55	11.30
26 27 26 00-0182		Specialty Switches *(26 27 26 00-0134)*		
26 27 26 00-0183		Dimmers With SPST Switch *(26 27 26 00-0182)*		
26 27 26 00-0184	EA	600 Watt Dimmers With SPST Switch	71.77	25.38
26 27 26 00-0185	EA	1,000 Watt Dimmers With SPST Switch	137.32	25.38
26 27 26 00-0186	EA	1,500 Watt Dimmers With SPST Switch	250.97	40.84
26 27 26 00-0187	EA	2,000 Watt Dimmers With SPST Switch	334.62	40.84
26 27 26 00-0188	EA	600 Watt Fluorescent Dimmer Switch	180.76	30.12
26 27 26 00-0189	EA	1,000 Watt Fluorescent Dimmer Switch	252.73	30.12
26 27 26 00-0190	EA	1,500 Watt Fluorescent Dimmer Switch	464.31	45.46
26 27 26 00-0191	EA	Remote Speed Switch For Paddle Fan	121.45	37.56
26 27 26 00-0192	EA	600 Watt Combination Remote Speed Switch/Incandescent Dimmer	204.77	56.06
26 27 26 00-0193		Time Switches *(26 27 26 00-0182)*		
26 27 26 00-0194	EA	40 Amperes, 125 Volt, SPST, Standard Time Switch	143.40	33.84
26 27 26 00-0195	EA	40 Amperes, 277 Volt, SPST, Standard Time Switch	147.19	33.84
26 27 26 00-0196	EA	40 Amperes, 125 Volt, DPST, Standard Time Switch	143.40	33.84
26 27 26 00-0197	EA	40 Amperes, 277 Volt, DPST, Standard Time Switch	147.19	33.84
26 27 26 00-0198	EA	40 Amperes, 125 Volt, SPST, 7-Day Time Switch	168.64	33.84
26 27 26 00-0199	EA	40 Amperes, 277 Volt, SPST, 7-Day Time Switch	168.64	33.84
26 27 26 00-0200	EA	40 Amperes, 125 Volt, DPDT, 7-Day Time Switch	317.56	33.84
26 27 26 00-0201	EA	40 Amperes, 277 Volt, DPDT, 7-Day Time Switch	317.56	33.84
26 27 26 00-0202	EA	20 Amperes, 125 Volt, SPST, Programmable Time Switch	269.78	33.84
26 27 26 00-0203	EA	20 Amperes, 277 Volt, SPST, Programmable Time Switch	298.96	33.84
26 27 26 00-0204	EA	20 Amperes, 277 Volt, SPST, Weatherproof Programmable Time Switch	298.96	33.84
26 27 26 00-0205	EA	40 Amperes, 125 Volt, 4PST, Astro Dial Time Switch	367.91	33.84
26 27 26 00-0206	EA	40 Amperes, 277 Volt, 4PST, Astro Dial Time Switch	379.52	33.84
26 27 26 00-0207	EA	40 Amperes, 125 Volt, SPST, Weatherproof Standard Time Switch	143.40	33.84
26 27 26 00-0208	EA	40 Amperes, 277 Volt, SPST, Weatherproof Standard Time Switch	147.19	33.84
26 27 26 00-0209	EA	40 Amperes, 125 Volt, DPST, Weatherproof Standard Time Switch	143.40	33.84
26 27 26 00-0210	EA	40 Amperes, 277 Volt, DPST, Weatherproof Standard Time Switch	147.19	33.84
26 27 26 00-0211	EA	40 Amperes, 125 Volt, SPST, Weatherproof 7-Day Time Switch	168.64	33.84
26 27 26 00-0212	EA	40 Amperes, 277 Volt, SPST, Weatherproof 7-Day Time Switch	168.64	33.84
26 27 26 00-0213	EA	40 Amperes, 125 Volt, DPDT, Weatherproof 7-Day Time Switch	317.56	33.84
26 27 26 00-0214	EA	40 Amperes, 277 Volt, DPDT, Weatherproof 7-Day Time Switch	317.56	33.84
26 27 26 00-0215	EA	40 Amperes, 125 Volt, 4PST, Weatherproof Astro Dial Time Switch	367.91	33.84
26 27 26 00-0216	EA	40 Amperes, 277 Volt, 4PST, Weatherproof Astro Dial Time Switch	379.52	33.84
26 27 26 00-0217		Low Voltage Switching *(26 27 26 00-0182)*		
26 27 26 00-0218	EA	36 Pin Male Or Female Connector	267.36	11.28
26 27 26 00-0219		Other Switches *(26 27 26 00-0182)*		
26 27 26 00-0220	EA	Pull Chain Switch 120/277 Volt AC Installed In Light Fixture	38.52	16.92
26 27 26 00-0221	EA	SPST Locking Switch For Concealed Devices	122.79	45.12
26 27 26 00-0222	EA	3-Way Locking Switch For Concealed Devices	124.82	45.12
26 27 26 00-0223	EA	Emergency Off Switch, With 1 Non-Closing Contact, Circular, Red, With Guard	142.04	42.19
26 27 26 00-0224	EA	15 Amperes Momentary Contact Switch	133.77	42.19
26 27 26 00-0225	EA	20 Amperes Momentary Contact Switch	142.48	42.19
26 27 26 00-0226	EA	2-1/4" Handy Box Cover Units Fuseholder Switch	125.99	50.85
26 27 26 00-0227	EA	2-3/4" Handy Box Cover Units Fuseholder Switch	128.42	50.85
26 27 26 00-0228	EA	4" Square Box Cover Units With 2 Fuseholders And 2 Switches	158.30	62.15
26 27 26 00-0229	EA	4" Square Box Cover Units With 1 Fuseholder And 1 Switch	143.97	56.50
26 27 26 00-0230	EA	4" Octagon Box Cover Units With 1 Fuseholder And 1 Switch	144.58	56.50
26 27 26 00-0231		Hospital Grade Switches *(26 27 26 00-0182)*		
26 27 26 00-0232	EA	15 Amperes, 120/277 Volt, SPST Hospital Grade Switch	32.28	11.28
26 27 26 00-0233	EA	20 Amperes, 120/277 Volt, SPST Hospital Grade Switch	38.57	14.10
26 27 26 00-0234		Plates And Covers *(26 27 26)*		
26 27 26 00-0235		Wall Plates *(26 27 26 00-0234)*		
26 27 26 00-0236		Nylon Wall Plates *(26 27 26 00-0235)*		
26 27 26 00-0237	EA	1 Gang Nylon Switch Wall Plates	1.92	0.56
26 27 26 00-0238	EA	2 Gang Nylon Switch Wall Plates	3.29	0.84
26 27 26 00-0239	EA	3 Gang Nylon Switch Wall Plates	4.70	1.13
26 27 26 00-0240	EA	4 Gang Nylon Switch Wall Plate	6.85	1.42
26 27 26 00-0241	EA	1 Gang Duplex Nylon Wall Plate	1.94	0.56
26 27 26 00-0242	EA	2 Gang Duplex Nylon Wall Plate	3.38	0.84

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 27 26 00-0243		**Plastic Wall Plates** *(26 27 26 00-0235)*		
26 27 26 00-0244	EA	1 Gang Plastic Switch Wall Plates	1.76	0.56
26 27 26 00-0245	EA	2 Gang Plastic Switch Wall Plates	2.97	0.84
26 27 26 00-0246	EA	3 Gang Plastic Switch Wall Plates	4.19	1.13
26 27 26 00-0247	EA	4 Gang Plastic Switch Wall Plates	6.85	1.42
26 27 26 00-0248	EA	1 Gang Duplex Plastic Wall Plate	1.76	0.56
26 27 26 00-0249	EA	2 Gang Duplex Plastic Wall Plate	2.98	0.84
26 27 26 00-0250		**Thermoplastic Wall Plates (Hospital Grade)** *(26 27 26 00-0235)*		
26 27 26 00-0251	EA	1 Gang Thermoplastic Hospital Grade Switch Wall Plate	9.46	0.56
26 27 26 00-0252	EA	2 Gang Thermoplastic Hospital Grade Switch Wall Plate	11.39	0.84
26 27 26 00-0253	EA	3 Gang Thermoplastic Hospital Grade Switch Wall Plate	17.93	1.13
26 27 26 00-0254	EA	4 Gang Thermoplastic Hospital Grade Switch Wall Plate	26.32	1.42
26 27 26 00-0255	EA	1 Gang Duplex Thermoplastic Hospital Grade Wall Plate	14.07	0.56
26 27 26 00-0256	EA	2 Gang Duplex Thermoplastic Hospital Grade Wall Plate	22.15	0.84
26 27 26 00-0257		**Brass Wall Plates** *(26 27 26 00-0235)*		
26 27 26 00-0258	EA	1 Gang, 0.04" Brass Switch Wall Plates	20.02	2.54
26 27 26 00-0259	EA	2 Gang, 0.04" Brass Switch Wall Plates	38.29	2.94
26 27 26 00-0260	EA	3 Gang, 0.04" Brass Switch Wall Plates	56.47	3.27
26 27 26 00-0261	EA	4 Gang, 0.04" Brass Switch Wall Plates	88.49	3.55
26 27 26 00-0262	EA	5 Gang, 0.04" Brass Switch Wall Plates	108.02	3.79
26 27 26 00-0263	EA	6 Gang, 0.04" Brass Switch Wall Plates	125.20	3.96
26 27 26 00-0264	EA	1 Gang, 0.04" Brass Duplex Receptacle Wall Plate	20.02	2.54
26 27 26 00-0265	EA	2 Gang, 0.04" Brass Duplex Receptacle Wall Plate	45.10	2.94
26 27 26 00-0266	EA	3 Gang 0.04" Brass Duplex Receptacle Wall Plate	65.43	3.27
26 27 26 00-0267		**Stainless Steel Wall Plates** *(26 27 26 00-0235)*		
26 27 26 00-0268	EA	1 Gang, 302 Stainless Steel With Satin Finish Switch Wall Plates	10.20	2.54
26 27 26 00-0269	EA	2 Gang, 302 Stainless Steel With Satin Finish Switch Wall Plates	16.84	2.94
26 27 26 00-0270	EA	3 Gang, 302 Stainless Steel With Satin Finish Switch Wall Plates	23.88	3.27
26 27 26 00-0271	EA	4 Gang, 302 Stainless Steel With Satin Finish Switch Wall Plates	35.57	3.55
26 27 26 00-0272	EA	5 Gang, 302 Stainless Steel With Satin Finish Switch Wall Plates	42.06	3.79
26 27 26 00-0273	EA	6 Gang, 302 Stainless Steel With Satin Finish Switch Wall Plates	51.14	3.96
26 27 26 00-0274	EA	1 Gang, 302 Stainless Steel With Satin Finish Duplex Receptacle Wall Plate	11.28	2.54
26 27 26 00-0275	EA	2 Gang, 302 Stainless Steel With Satin Finish Duplex Receptacle Wall Plate	19.38	2.94
26 27 26 00-0276	EA	3 Gang, 302 Stainless Steel With Satin Finish Duplex Receptacle Wall Plate	32.31	3.27
26 27 26 00-0277	EA	4 Gang, 302 Stainless Steel With Satin Finish Duplex Receptacle Wall Plate	39.22	3.55
26 27 26 00-0278		**Chrome Wall Plates** *(26 27 26 00-0235)*		
26 27 26 00-0279	EA	1 Gang, 0.040" Chrome Switch Wall Plate	41.16	2.54
26 27 26 00-0280	EA	2 Gang 0.040" Chrome Switch Wall Plate	77.90	2.94
26 27 26 00-0281	EA	3 Gang 0.040" Chrome Switch Wall Plate	114.64	3.27
26 27 26 00-0282	EA	1 Gang 0.040" Chrome Duplex Receptacle Wall Plate	41.13	2.54
26 27 26 00-0283		**Ceramic Wall Plates** *(26 27 26 00-0235)*		
26 27 26 00-0284	EA	1 Gang, Ceramic Switch Wall Plate	21.17	3.10
26 27 26 00-0285	EA	1 Gang, Ceramic Duplex Receptacle Wall Plate	21.17	3.10
26 27 26 00-0286	EA	2 Gang, Ceramic Switch Wall Plate	24.64	2.94
26 27 26 00-0287	EA	2 Gang, Ceramic Combination Switch/Receptacle Wall Plate	24.64	2.94
26 27 26 00-0288	EA	3 Gang, Ceramic Switch Wall Plate	32.16	3.27
26 27 26 00-0289		**Weatherproof Covers** *(26 27 26 00-0234)*		
26 27 26 00-0290		**Stamped Metallic Weatherproof Covers** *(26 27 26 00-0289)*		
		Note: Includes electrostatically applied powder coating and neoprene gasket.		
26 27 26 00-0291	EA	Blank Cover, Single Gang, Stamped Metallic Weatherproof Cover (Killark® 1FBC)	15.53	0.56
26 27 26 00-0292	EA	Duplex Receptacle, Single Gang, Stamped Metallic Weatherproof Cover (Killark® 1FAC)	16.86	0.56
26 27 26 00-0293	EA	Single Receptacle, Single Gang, Stamped Metallic Weatherproof Cover (Killark® 1FRC)	16.86	0.56
26 27 26 00-0294	EA	Toggle Switch, Single Gang, Stamped Metallic Weatherproof Cover (Killark® 1FTC)	16.86	0.56
26 27 26 00-0295	EA	Blank Cover, Two Gang, Stamped Metallic Weatherproof Cover (Killark® 2FBC)	20.56	0.84
26 27 26 00-0296	EA	Duplex Receptacle, Two Gang, Stamped Metallic Weatherproof Cover (Killark® 2FAC)	23.44	0.84
26 27 26 00-0297	EA	Single Receptacle, Two Gang, Stamped Metallic Weatherproof Cover (Killark® 2FRC)	23.73	0.84
26 27 26 00-0298	EA	Toggle Switch, Two Gang, Stamped Metallic Weatherproof Cover (Killark® 2FTC)	23.73	0.84
26 27 26 00-0299	EA	Toggle Switch And Duplex Receptacle, Two Gang, Stamped Metallic Weatherproof Cover (Killark® 2FTAC)	32.50	0.84
26 27 26 00-0300	EA	Blank Cover, Three Gang, Stamped Metallic Weatherproof Cover (Killark® 3FB)	30.52	1.13
26 27 26 00-0301	EA	Toggle Switch, Three Gang, Stamped Metallic Weatherproof Cover (Killark® 3FT)	33.46	1.13
26 27 26 00-0302		**Cast Metallic Weatherproof Covers** *(26 27 26 00-0289)*		
		Note: Includes electrostatically applied powder coating and neoprene gasket.		
26 27 26 00-0303	EA	Blank Cover, Single Gang, Cast Metallic Weatherproof Cover (Killark® FSBC)	19.11	0.56

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 27 26 00-0304	EA	Duplex Receptacle, Single Gang, Cast Metallic Weatherproof Cover With Self Closing Lid (Killark® FCLA)	62.04	0.56
26 27 26 00-0305	EA	Single Receptacle, Single Gang, Cast Metallic Weatherproof Cover With Self Closing Lid (Killark® FCLR)	69.63	0.56
26 27 26 00-0306	EA	Guarded Toggle Switch, Single Gang, Cast Metallic Weatherproof Cover (Killark® FSTG)	18.97	0.56
26 27 26 00-0307	EA	Toggle Switch, Single Gang, Cast Metallic Weatherproof Cover With Self Closing Lid (Killark® FCLT)	52.52	0.56
26 27 26 00-0308	EA	Lever Operated Toggle Switch, Single Gang, Cast Metallic Weatherproof Cover (Killark® FSPT)	87.67	0.56
26 27 26 00-0309	EA	Plunger Operated Toggle Switch, Single Gang, Cast Metallic Weatherproof Cover (Killark® FST)	111.74	0.56
26 27 26 00-0310	EA	Blank Cover, Two Gang, Cast Metallic Weatherproof Cover (Killark® 2FSBC)	23.73	0.84
26 27 26 00-0311	EA	Plunger Operated Toggle Switch, Two Gang, Cast Metallic Weatherproof Cover (Killark® 2FST)	176.56	0.84
26 27 26 00-0312	EA	Blank Cover, Three Gang, Cast Metallic Weatherproof Cover (Killark® 3FSBC)	39.94	1.13
26 27 26 00-0313	EA	Plunger Operated Toggle Switch, Three Gang, Cast Metallic Weatherproof Cover (Killark® 3FST)	168.41	1.13
26 27 26 00-0314		**Die Cast Aluminum Weatherproof Covers** *(26 27 26 00-0289)*		
		Note: Includes electrostatically applied powder coating and neoprene gasket.		
26 27 26 00-0315	EA	Duplex Receptacle, Single Gang, Die Cast Aluminum Weatherproof Cover With Self Closing Lid (Bell® 5027)	6.27	0.56
26 27 26 00-0316	EA	Single Receptacle, Single Gang, Die Cast Aluminum Weatherproof Cover With Self Closing Lid (Bell® 5026)	8.15	0.56
26 27 26 00-0317	EA	Duplex Receptacles, Two Gang, Die Cast Aluminum Weatherproof Cover With Self Closing Lid (Bell® 5032)	10.88	0.84
26 27 26 00-0318	EA	Toggle Switch, Two Gang, Die Cast Aluminum Weatherproof Cover With Self Closing Lid (Bell® 5041)	11.86	0.84
26 27 26 00-0319	EA	Toggle Switch And Duplex Receptacle, Two Gang, Die Cast Aluminum Weatherproof Cover With Self Closing Lid (Bell® 5042)	11.86	0.84
26 27 26 00-0320	EA	Toggle Switch And Single Receptacle, Two Gang, Die Cast Aluminum Weatherproof Cover With Self Closing Lid (Bell® 5043)	13.27	0.84
26 27 26 00-0321		**Heavy-Duty Die Cast Aluminum Weatherproof Covers** *(26 27 26 00-0289)*		
		Note: Includes baked on lacquer finish and neoprene gasket.		
26 27 26 00-0322	EA	Duplex Receptacle, Single Gang, Heavy-Duty Die Cast Aluminum Weatherproof Cover With Self Closing Lid (Pass & Seymour Legrand® 4510)	67.47	0.56
26 27 26 00-0323		**Polycarbonate Weatherproof Covers** *(26 27 26 00-0289)*		
		Note: Includes neoprene gasket.		
26 27 26 00-0324	EA	Toggle Switch, Single Gang, Polycarbonate Weatherproof Cover With Tinted Lid (Bell® 5730)	13.29	0.56
26 27 26 00-0325	EA	Duplex Receptacle, Single Gang, Polycarbonate Weatherproof Cover With Tinted Lid (Bell® 5730)	13.29	0.56
26 27 26 00-0326	EA	Single Receptacle, Single Gang, Polycarbonate Weatherproof Cover With Tinted Lid (Bell® 5730)	13.29	0.56
26 27 26 00-0327	EA	Duplex Receptacle, Two Gang, Polycarbonate Weatherproof Cover With Tinted Lid (Bell® 5775)	16.34	0.84
26 27 26 00-0328	EA	Toggle Switch And Single Receptacle, Two Gang, Polycarbonate Weatherproof Cover With Tinted Lid (Bell® 5775)	16.34	0.84
26 27 26 00-0329		**High Impact Thermoplastic Weatherproof Covers** *(26 27 26 00-0289)*		
		Note: Includes neoprene gasket.		
26 27 26 00-0330	EA	Duplex Receptacle, Single Gang, High Impact Thermoplastic Weatherproof Cover With Self Closing Lid (Hubbell® HBL522)	97.13	0.56
26 27 26 00-0331		**Non-Metallic (PVC) Weatherproof Covers** *(26 27 26 00-0289)*		
		Note: Includes neoprene gasket.		
26 27 26 00-0332	EA	Blank Cover, Single Gang, Non-Metallic (PVC) Weatherproof Cover	12.76	0.56
26 27 26 00-0333	EA	Blank Cover, Two Gang, Non-Metallic (PVC) Weatherproof Cover	13.67	0.84
26 27 26 00-0334	EA	Toggle Switch, Single Gang, Non-Metallic (PVC) Weatherproof Cover	12.80	0.56
26 27 26 00-0335	EA	Switch, Single Gang, Non-Metallic (PVC) Weatherproof Cover	28.31	0.56
26 27 26 00-0336	EA	Duplex Receptacle, Single Gang, Non-Metallic (PVC) Weatherproof Cover	32.83	0.56
26 27 26 00-0337	EA	20 Amperes, Receptacle, Single Gang, Non-Metallic (PVC) Weatherproof Cover	26.60	0.56
26 27 26 00-0338	EA	30 Amperes, Receptacle, Single Gang, Non-Metallic (PVC) Weatherproof Cover	19.80	0.56
26 27 26 00-0339	EA	50 Amperes, Receptacle, Single Gang, Non-Metallic (PVC) Weatherproof Cover	23.19	0.56
26 27 26 00-0340	EA	Plunger Switch, Single Gang, Non-Metallic (PVC) Weatherproof Cover	20.72	0.56
26 27 26 00-0341	EA	Double Duplex Receptacle, Two Gang, Non-Metallic (PVC) Weatherproof Cover	29.83	0.84
26 27 26 00-0342		**Removal And Reinstallation Of Wiring Devices** *(26 27 26)*		
		Note: Includes storage and cleaning.		
26 27 26 00-0343	EA	Removal And Reinstallation Of Receptacle, Switch, Outlet Or Special System Device	74.21	
26 27 26 00-0344	EA	Removal And Reinstallation Of Receptacle Or Switch Outlet Cover Plate	9.40	
26 27 26 00-0345		**Relay Systems** *(26 27 26)*		
26 27 26 00-0346	EA	10 Amperes, 24 Volt Coil, 2 Position Relay	90.93	25.38
26 27 26 00-0347	EA	20 Amperes, 120 Volt Coil, Up To 4 Contacts, Industrial Control Relay	402.57	84.60
26 27 26 00-0348	EA	20 Amperes, 120 Volt Coil, 12 Contacts, Industrial Control Relay	692.70	112.80
26 27 26 00-0349		**Limit Switches** *(26 27 26)*		
26 27 26 00-0350		**Heavy-Duty Precision Oiltight** *(26 27 26 00-0349)*		
26 27 26 00-0351		**Lever Arm, Plunger, Wobble Stick Type** *(26 27 26 00-0350)*		
26 27 26 00-0352	EA	Limit Switch, Heavy-Duty, Lever Arm Weatherproof, 10 Amperes Rated	432.81	71.07
26 27 26 00-0353		**In Line Midget Fuseholders** *(26 27 26)*		
		See CSI section 26 28 13 00-0078 for fuses.		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 27 26 00-0354	EA	Single Pole Water Resistant In Line Midget Fuseholder	88.80	
26 27 26 00-0355	EA	Double Pole Water Resistant In Line Midget Fuseholder	216.66	

26 27 33 Power Distribution Units *(26 27)*

Note: Includes wiring connections and testing.

26 27 33 00-0001 Liebert Precision Power Center *(26 27 33)*

Note: With K20 Trans Spike Suppression Modules Lighting/Surge Arrestors. Includes start-up.

26 27 33 00-0002	EA	PDU 15 KVA, 208/480/600 Input Voltage, 120/208 Output Voltage (Liebert PPC015C)	22,406.65	346.87
26 27 33 00-0003	EA	PDU 30 KVA, 208/480/600 Input Voltage, 120/208 Output Voltage (Liebert PPC030C)	27,072.60	375.96
26 27 33 00-0004	EA	PDU 50 KVA, 208/480/600 Input Voltage, 120/208 Output Voltage (Liebert PPC050C)	30,858.07	417.36
26 27 33 00-0005	EA	PDU 75 KVA, 208/480/600 Input Voltage, 120/208 Output Voltage (Liebert PPC075C)	35,516.71	451.20
26 27 33 00-0006	EA	PDU 100 KVA, 208/480/600 Input Voltage, 120/208 Output Voltage (Liebert PPC100C)	38,726.29	564.00
26 27 33 00-0007	EA	PDU 125 KVA, 208/480/600 Input Voltage, 120/208 Output Voltage (Liebert PPC125C)	43,427.89	676.80
26 27 33 00-0008	EA	PDU 150 KVA, 208/480/600 Input Voltage, 120/208 Output Voltage (Liebert PPC150C)	50,104.18	789.61
26 27 33 00-0009	EA	PDU 200 KVA, 480/600 Input Voltage, 120/208 Output Voltage (Liebert PPC200C)	52,655.54	902.41
26 27 33 00-0010	EA	PDU 225 KVA, 480/600 Input Voltage, 120/208 Output Voltage (Liebert PPC225C)	55,601.83	1,015.20
26 27 33 00-0011	EA	Ex Panelboard 10-30 KVA	1,954.56	112.80
26 27 33 00-0012	EA	Ex Panelboard 50-125 KVA	2,932.49	141.01
26 27 33 00-0013	EA	Ex Panelboard 150-220 KVA	6,674.99	169.20
26 27 33 00-0014	EA	Removal And Reinstallation Of Power Distribution Unit Note: Includes disconnection / reconnection of branch circuits, storage and cleaning.	1,804.81	
26 27 33 00-0015	EA	Start-Up Liebert Power Distribution Unit Line Item Applies To A Relocation Only	1,353.61	

26 27 73 Door Chimes *(26 27)*

26 27 73 00-0001 Door Bell Chime And Door Button With Built-In Viewer *(26 27 73)*

Note: Non-electric chime, mounted on door

26 27 73 00-0002	EA	Mechanical Door Bell Chime And Door Button With Built-In Viewer (Newhouse Hardware MCHBV)	96.14	21.43

26 27 73 00-0003 Wireless Door Bell System *(26 27 73)*

26 27 73 00-0004	EA	Wireless Doorbell Chime And Push Button (Broan LA542WH) Note: Includes 2 push buttons	141.32	
26 27 73 00-0005	EA	Wireless Doorbell Chime And Push Button (STI-3350G) Note: Includes 2 push buttons	132.55	
26 27 73 00-0006	EA	Wireless Doorbell Chime And Push Button (GE 19300) Note: Includes 2 push buttons	96.72	

26 27 73 00-0007 Door Chimes *(26 27 73)*

26 27 73 00-0008	EA	Door Bell, Push-Button And Transformer, Complete	674.56	234.96
26 27 73 00-0009	EA	Visual Flashing Doorbell Indicator, Wire To Existing System, Complete	304.86	56.40
26 27 73 00-0010	EA	Removal And Replacement Of Bell/Buzzer, Complete Note: Includes removal of existing.	119.50	28.20

26 28 Low-Voltage Circuit Protective Devices *(26 20)*

26 28 13 Fuses *(26 28)*

26 28 13 00-0001 125 Volt AC, Type T Dual Element, Time Delay, Edison Base Plug Fuses *(26 28 13)*

26 28 13 00-0002	EA	1 Amperes, 125 Volt AC, Type T Dual Element, Time Delay, Edison Base Plug Fuse	29.41	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0003	EA	2 Amperes, 125 Volt AC, Type T Dual Element, Time Delay, Edison Base Plug Fuse	28.50	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0004	EA	3 Amperes, 125 Volt AC, Type T Dual Element, Time Delay, Edison Base Plug Fuse	27.27	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0005	EA	5 Amperes, 125 Volt AC, Type T Dual Element, Time Delay, Edison Base Plug Fuse	27.10	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0006	EA	6 Amperes, 125 Volt AC, Type T Dual Element, Time Delay, Edison Base Plug Fuse	28.25	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0007	EA	8 Amperes, 125 Volt AC, Type T Dual Element, Time Delay, Edison Base Plug Fuse	26.00	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0008	EA	10 Amperes, 125 Volt AC, Type T Dual Element, Time Delay, Edison Base Plug Fuse	25.47	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0009	EA	15 Amperes, 125 Volt AC, Type T Dual Element, Time Delay, Edison Base Plug Fuse	21.09	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0010	EA	20 Amperes, 125 Volt AC, Type T Dual Element, Time Delay, Edison Base Plug Fuse	20.43	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0011	EA	25 Amperes, 125 Volt AC, Type T Dual Element, Time Delay, Edison Base Plug Fuse	21.69	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0012	EA	30 Amperes, 125 Volt AC, Type T Dual Element, Time Delay, Edison Base Plug Fuse	20.81	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	

26 28 13 00-0013 Class RK1, Time Delay Fuses *(26 28 13)*

26 28 13 00-0014 250 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuses *(26 28 13 00-0013)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 13 00-0015	EA	1 Ampere, 250 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	50.94	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0016	EA	2 Amperes, 250 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	46.98	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0017	EA	3 Amperes, 250 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	49.74	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0018	EA	4 Amperes, 250 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	49.38	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0019	EA	5 Amperes, 250 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	46.62	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0020	EA	10 Amperes, 250 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	44.97	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0021	EA	15 Amperes, 250 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	40.58	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0022	EA	20 Amperes, 250 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	40.25	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0023	EA	25 Amperes, 250 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	40.61	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0024	EA	30 Amperes, 250 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	40.16	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0025	EA	35 Amperes, 250 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	58.81	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0026	EA	40 Amperes, 250 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	57.49	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0027	EA	45 Amperes, 250 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	58.48	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0028	EA	50 Amperes, 250 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	57.67	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0029	EA	60 Amperes, 250 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	56.47	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	

26 28 13 00-0030 250 Volt AC, 200 kAmp I.R., BladeType, Class RK1, Time Delay Fuses *(26 28 13 00-0013)*

26 28 13 00-0031	EA	70 Amperes, 250 Volt AC, 200 kAmp I.R., BladeType, Class RK1, Time Delay Fuse	110.52	10.15
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.77*	
26 28 13 00-0032	EA	80 Amperes, 250 Volt AC, 200 kAmp I.R., BladeType, Class RK1, Time Delay Fuse	109.86	10.15
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.77*	
26 28 13 00-0033	EA	90 Amperes, 250 Volt AC, 200 kAmp I.R., BladeType, Class RK1, Time Delay Fuse	123.25	10.15
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.77*	
26 28 13 00-0034	EA	100 Amperes, 250 Volt AC, 200 kAmp I.R., BladeType, Class RK1, Time Delay Fuse	108.80	10.15
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.77*	
26 28 13 00-0035	EA	110 Amperes, 250 Volt AC, 200 kAmp I.R., BladeType, Class RK1, Time Delay Fuse	329.30	10.15
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.77*	
26 28 13 00-0036	EA	125 Amperes, 250 Volt AC, 200 kAmp I.R., BladeType, Class RK1, Time Delay Fuse	238.01	10.15
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.77*	
26 28 13 00-0037	EA	150 Amperes, 250 Volt AC, 200 kAmp I.R., BladeType, Class RK1, Time Delay Fuse	216.72	11.17
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.45*	
26 28 13 00-0038	EA	200 Amperes, 250 Volt AC, 200 kAmp I.R., BladeType, Class RK1, Time Delay Fuse	228.88	11.17
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.45*	
26 28 13 00-0039	EA	250 Amperes, 250 Volt AC, 200 kAmp I.R., BladeType, Class RK1, Time Delay Fuse	438.95	11.17
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.45*	
26 28 13 00-0040	EA	300 Amperes, 250 Volt AC, 200 kAmp I.R., BladeType, Class RK1, Time Delay Fuse	470.51	13.76
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.14*	
26 28 13 00-0041	EA	350 Amperes, 250 Volt AC, 200 kAmp I.R., BladeType, Class RK1, Time Delay Fuse	506.88	13.76
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.14*	
26 28 13 00-0042	EA	400 Amperes, 250 Volt AC, 200 kAmp I.R., BladeType, Class RK1, Time Delay Fuse	387.54	13.76
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.14*	
26 28 13 00-0043	EA	450 Amperes, 250 Volt AC, 200 kAmp I.R., BladeType, Class RK1, Time Delay Fuse	879.89	13.76
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.14*	
26 28 13 00-0044	EA	500 Amperes, 250 Volt AC, 200 kAmp I.R., BladeType, Class RK1, Time Delay Fuse	828.90	16.81
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.17*	
26 28 13 00-0045	EA	600 Amperes, 250 Volt AC, 200 kAmp I.R., BladeType, Class RK1, Time Delay Fuse	642.84	16.81
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.17*	

26 28 13 00-0046 600 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuses *(26 28 13 00-0013)*

26 28 13 00-0047	EA	1 Amperes, 600 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	83.57	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0048	EA	2 Amperes, 600 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	77.26	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0049	EA	3 Amperes, 600 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	71.97	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0050	EA	4 Amperes, 600 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	73.71	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0051	EA	5 Amperes, 600 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	72.21	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0052	EA	10 Amperes, 600 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	72.75	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0053	EA	15 Amperes, 600 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	66.99	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0054	EA	20 Amperes, 600 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	66.41	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 13 00-0055	EA	25 Amperes, 600 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	65.63	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0056	EA	30 Amperes, 600 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	66.77	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0057	EA	35 Amperes, 600 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	100.99	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0058	EA	40 Amperes, 600 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	101.26	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0059	EA	45 Amperes, 600 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	99.10	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0060	EA	50 Amperes, 600 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	100.12	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0061	EA	60 Amperes, 600 Volt AC, 200 kAmp I.R., Ferrule Type, Class RK1, Time Delay Fuse	101.02	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	

26 28 13 00-0062 600 Volt AC, 200 kAmp I.R., Blade Type, Class RK1, Time Delay Fuses *(26 28 13 00-0013)*

26 28 13 00-0063	EA	70 Amperes, 600 Volt AC, 200 kAmp I.R., Blade Type, Class RK1, Time Delay Fuse	194.96	10.15
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.77*	
26 28 13 00-0064	EA	80 Amperes, 600 Volt AC, 200 kAmp I.R., Blade Type, Class RK1, Time Delay Fuse	198.93	11.17
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.45*	
26 28 13 00-0065	EA	90 Amperes, 600 Volt AC, 200 kAmp I.R., Blade Type, Class RK1, Time Delay Fuse	197.79	11.17
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.45*	
26 28 13 00-0066	EA	100 Amperes, 600 Volt AC, 200 kAmp I.R., Blade Type, Class RK1, Time Delay Fuse	198.69	11.17
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.45*	
26 28 13 00-0067	EA	110 Amperes, 600 Volt AC, 200 kAmp I.R., Blade Type, Class RK1, Time Delay Fuse	373.97	11.17
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.45*	
26 28 13 00-0068	EA	125 Amperes, 600 Volt AC, 200 kAmp I.R., Blade Type, Class RK1, Time Delay Fuse	379.80	11.17
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*7.45*	
26 28 13 00-0069	EA	150 Amperes, 600 Volt AC, 200 kAmp I.R., Blade Type, Class RK1, Time Delay Fuse	372.13	13.76
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.14*	
26 28 13 00-0070	EA	200 Amperes, 600 Volt AC, 200 kAmp I.R., Blade Type, Class RK1, Time Delay Fuse	371.16	13.76
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.14*	
26 28 13 00-0071	EA	250 Amperes, 600 Volt AC, 200 kAmp I.R., Blade Type, Class RK1, Time Delay Fuse	720.50	13.76
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*9.14*	
26 28 13 00-0072	EA	300 Amperes, 600 Volt AC, 200 kAmp I.R., Blade Type, Class RK1, Time Delay Fuse	721.87	16.81
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.17*	
26 28 13 00-0073	EA	350 Amperes, 600 Volt AC, 200 kAmp I.R., Blade Type, Class RK1, Time Delay Fuse	816.23	16.81
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.17*	
26 28 13 00-0074	EA	400 Amperes, 600 Volt AC, 200 kAmp I.R., Blade Type, Class RK1, Time Delay Fuse	737.91	16.81
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.17*	
26 28 13 00-0075	EA	450 Amperes, 600 Volt AC, 200 kAmp I.R., Blade Type, Class RK1, Time Delay Fuse	1,339.13	16.81
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.17*	
26 28 13 00-0076	EA	500 Amperes, 600 Volt AC, 200 kAmp I.R., Blade Type, Class RK1, Time Delay Fuse	1,187.42	20.31
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 28 13 00-0077	EA	600 Amperes, 600 Volt AC, 200 kAmp I.R., Blade Type, Class RK1, Time Delay Fuse	1,032.99	20.31
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	

26 28 13 00-0078 600 Volt AC, Class CC Midget Fuses *(26 28 13)*

Note: 250/300 Volt DC.

26 28 13 00-0079	EA	1 Amperes, 600 Volt AC, Class CC Midget Fuse	59.96	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0080	EA	2 Amperes, 600 Volt AC, Class CC Midget Fuse	61.01	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0081	EA	3 Amperes, 600 Volt AC, Class CC Midget Fuse	60.71	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0082	EA	5 Amperes, 600 Volt AC, Class CC Midget Fuse	60.38	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0083	EA	6 Amperes, 600 Volt AC, Class CC Midget Fuse	65.33	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0084	EA	8 Amperes, 600 Volt AC, Class CC Midget Fuse	57.40	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0085	EA	10 Amperes, 600 Volt AC, Class CC Midget Fuse	66.71	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0086	EA	15 Amperes, 600 Volt AC, Class CC Midget Fuse	60.41	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0087	EA	20 Amperes, 600 Volt AC, Class CC Midget Fuse	59.11	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0088	EA	25 Amperes, 600 Volt AC, Class CC Midget Fuse	56.14	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	
26 28 13 00-0089	EA	30 Amperes, 600 Volt AC, Class CC Midget Fuse	58.66	8.12
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.42*	

26 28 13 00-0090 200,000 Ampere Interrupting Capacity, 600 Volt AC, Class J Bolted Fuse *(26 28 13)*

26 28 13 00-0091	EA	1 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	83.17	5.64
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.38*	
26 28 13 00-0092	EA	3 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	83.86	5.64
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*3.38*	
26 28 13 00-0093	EA	6 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	70.46	6.77
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*4.06*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 13 00-0094	EA	10 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	68.32	8.46
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.08*	
26 28 13 00-0095	EA	15 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	69.97	8.46
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.08*	
26 28 13 00-0096	EA	20 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	68.50	8.46
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*5.08*	
26 28 13 00-0097	EA	25 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	86.76	11.28
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.77*	
26 28 13 00-0098	EA	30 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	70.26	11.28
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.77*	
26 28 13 00-0099	EA	35 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	131.82	11.28
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.77*	
26 28 13 00-0100	EA	40 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	110.61	11.28
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.77*	
26 28 13 00-0101	EA	45 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	128.57	11.28
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*6.77*	
26 28 13 00-0102	EA	50 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	109.83	14.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.46*	
26 28 13 00-0103	EA	60 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	107.55	14.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.46*	
26 28 13 00-0104	EA	70 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	172.23	16.92
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.15*	
26 28 13 00-0105	EA	80 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	184.82	16.92
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.15*	
26 28 13 00-0106	EA	90 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	181.61	16.92
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.15*	
26 28 13 00-0107	EA	100 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	153.87	19.74
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.84*	
26 28 13 00-0108	EA	110 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	388.63	19.74
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.84*	
26 28 13 00-0109	EA	125 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	327.11	19.74
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.84*	
26 28 13 00-0110	EA	150 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	307.92	22.56
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 28 13 00-0111	EA	175 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	312.82	22.56
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 28 13 00-0112	EA	200 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	255.59	22.56
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 28 13 00-0113	EA	225 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	683.57	22.56
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 28 13 00-0114	EA	250 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	630.16	22.56
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 28 13 00-0115	EA	300 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	578.76	22.56
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 28 13 00-0116	EA	350 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	633.46	22.56
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 28 13 00-0117	EA	400 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	515.72	25.38
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.23*	
26 28 13 00-0118	EA	450 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	1,126.04	25.38
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.23*	
26 28 13 00-0119	EA	500 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	948.62	28.20
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.92*	
26 28 13 00-0120	EA	600 Amperes, 600 Volt AC, 200 kAmp I.R., Class J Bolted Fuse	697.87	28.20
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.92*	

26 28 13 00-0121 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuses *(26 28 13)*

26 28 13 00-0122	EA	100 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	2,191.38	14.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.46*	
26 28 13 00-0123	EA	150 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	2,195.74	14.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.46*	
26 28 13 00-0124	EA	200 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	2,199.79	14.10
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*8.46*	
26 28 13 00-0125	EA	250 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	2,189.84	16.92
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.15*	
26 28 13 00-0126	EA	300 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	2,015.46	16.92
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*10.15*	
26 28 13 00-0127	EA	350 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	2,154.93	19.74
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.84*	
26 28 13 00-0128	EA	400 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	1,981.81	19.74
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.84*	
26 28 13 00-0129	EA	450 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	2,218.88	19.74
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.84*	
26 28 13 00-0130	EA	500 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	2,175.20	19.74
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*11.84*	
26 28 13 00-0131	EA	600 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	1,929.74	22.56
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 28 13 00-0132	EA	601 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	1,982.28	22.56
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 28 13 00-0133	EA	650 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	2,642.68	22.56
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 28 13 00-0134	EA	700 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	1,920.22	22.56
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 13 00-0135	EA	750 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	2,957.61	25.38
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.23*	
26 28 13 00-0136	EA	800 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	1,693.14	25.38
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.23*	
26 28 13 00-0137	EA	900 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	2,483.76	25.38
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.23*	
26 28 13 00-0138	EA	1,000 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	1,664.24	25.38
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.23*	
26 28 13 00-0139	EA	1,200 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	1,714.50	25.38
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.23*	
26 28 13 00-0140	EA	1,350 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	3,841.33	25.38
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.23*	
26 28 13 00-0141	EA	1,400 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	3,787.02	25.38
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.23*	
26 28 13 00-0142	EA	1,500 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	3,414.37	25.38
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*15.23*	
26 28 13 00-0143	EA	1,600 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	2,121.35	28.20
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.92*	
26 28 13 00-0144	EA	1,800 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	4,526.08	28.20
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.92*	
26 28 13 00-0145	EA	2,000 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	2,887.85	28.20
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.92*	
26 28 13 00-0146	EA	2,500 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	3,913.42	28.20
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.92*	
26 28 13 00-0147	EA	2,501 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	6,685.60	28.20
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.92*	
26 28 13 00-0148	EA	3,000 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	4,363.02	31.02
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*18.61*	
26 28 13 00-0149	EA	3,500 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	9,054.15	31.02
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*18.61*	
26 28 13 00-0150	EA	3,800 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	10,510.67	31.02
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*18.61*	
26 28 13 00-0151	EA	4,000 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	6,065.26	31.02
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*18.61*	
26 28 13 00-0152	EA	5,000 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	9,588.96	31.02
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*18.61*	
26 28 13 00-0153	EA	6,000 Amperes, 600 Volt AC, 200 kAmp I.R., Class L Bolted Fuse	15,892.82	31.02
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*18.61*	

26 28 16 Enclosed Switches and Circuit Breakers *(26 28)*

26 28 16 13 Enclosed Circuit Breakers *(26 28 16)*

26 28 16 13-0001 Branch Circuit Breakers *(26 28 16 13)*

Note: For installation in existing and new panelboards. Use task modifier for installation in new panelboards.

26 28 16 13-0002 Branch Circuit Breakers 10,000 Amperes Interrupting Capacity, Plug-On *(26 28 16 13-0001)*

Note: Includes connection of electrical wire.

26 28 16 13-0003	EA	1 Pole, 120/240 Volt, 15 To 30 Amperes, Branch Circuit Breaker, 10,000 Amperes Interrupting Capacity	65.09	20.31
		For Bolt-On, Add	*16.03*	
		For Installation In New Panelboard, Deduct	*-11.28*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 28 16 13-0004	EA	1 Pole, 120/240 Volt, 35 To 60 Amperes, Branch Circuit Breaker, 10,000 Amperes Interrupting Capacity	65.09	20.31
		For Bolt-On, Add	*16.03*	
		For Installation In New Panelboard, Deduct	*-11.28*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 28 16 13-0005	EA	1 Pole, 120/240 Volt, 70 To 100 Amperes, Branch Circuit Breaker, 10,000 Amperes Interrupting Capacity	102.48	25.38
		For Bolt-On, Add	*22.68*	
		For Installation In New Panelboard, Deduct	*-14.10*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.92*	
26 28 16 13-0006	EA	1 Pole GFI, 15 To 30 Amperes, 120/240 Volt, Branch Circuit Breaker, 10,000 Amperes Interrupting Capacity	181.68	25.38
		For Bolt-On, Add	*32.58*	
		For Installation In New Panelboard, Deduct	*-14.10*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.92*	
26 28 16 13-0007	EA	1 Pole GFI, 35 To 60 Amperes, 120/240 Volt, Branch Circuit Breaker, 10,000 Protection Circuit Breaker, 10,000 Amperes Interrupting Capacity	272.26	25.38
		For Bolt-On, Add	*43.90*	
		For Installation In New Panelboard, Deduct	*-14.10*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.92*	
26 28 16 13-0008	EA	1 Pole GFI, 15 To 30 Amperes, 120/240 Volt, UL Listed 30mA Equipment Protection Circuit Breaker, 10,000 Amperes Interrupting Capacity	323.90	25.38
		For Bolt-On, Add	*50.36*	
		For Installation In New Panelboard, Deduct	*-14.10*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.92*	
26 28 16 13-0009	EA	1 Pole GFI, 15 To 20 Amperes, 120/240 Volt, "Arc Fault" Circuit Breaker, 10,000 Amperes Interrupting Capacity	131.78	25.38
		For Bolt-On, Add	*26.34*	
		For Installation In New Panelboard, Deduct	*-14.10*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.92*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 16 13-0010	EA	2 Pole, 15 To 30 Amperes, 120/240 Volt, Branch Circuit Breaker, 10,000 Amperes Interrupting Capacity	113.76	30.45
		For Bolt-On, Add	*26.06*	
		For Installation In New Panelboard, Deduct	*-16.92*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.30*	
26 28 16 13-0011	EA	2 Pole, 35 To 60 Amperes, 120/240 Volt, Branch Circuit Breaker, 10,000 Amperes Interrupting Capacity	113.76	30.45
		For Bolt-On, Add	*26.06*	
		For Installation In New Panelboard, Deduct	*-16.92*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.30*	
26 28 16 13-0012	EA	2 Pole, 70 To 100 Amperes, 120/240 Volt, Branch Circuit Breaker, 10,000 Amperes Interrupting Capacity	182.39	40.61
		For Bolt-On, Add	*38.59*	
		For Installation In New Panelboard, Deduct	*-22.56*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 28 16 13-0013	EA	2 Pole, 110 To 125 Amperes, 120/240 Volt, Branch Circuit Breaker, 10,000 Amperes Interrupting Capacity	335.52	50.76
		For Bolt-On, Add	*61.68*	
		For Installation In New Panelboard, Deduct	*-28.20*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*33.84*	
26 28 16 13-0014	EA	2 Pole, 150 Amperes, 120/240 Volt, Branch Circuit Breaker, 10,000 Amperes Interrupting Capacity	403.61	56.40
		For Bolt-On, Add	*72.17*	
		For Installation In New Panelboard, Deduct	*-31.02*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*37.23*	
26 28 16 13-0015	EA	2 Pole GFI, 15 To 50 Amperes, 120/240 Volt, Branch Circuit Breaker, 10,000 Amperes Interrupting Capacity	364.14	36.10
		For Bolt-On, Add	*59.73*	
		For Installation In New Panelboard, Deduct	*-20.30*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*24.36*	
26 28 16 13-0016	EA	2 Pole GFI, 15 To 50 Amperes, 120/240 Volt, UL Listed 30mA Equipment Protection Circuit Breaker, 10,000 Amperes Interrupting Capacity	512.30	36.10
		For Bolt-On, Add	*78.25*	
		For Installation In New Panelboard, Deduct	*-20.30*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*24.36*	
26 28 16 13-0017	EA	3 Pole, 15 To 30 Amperes, 120/240 Volt, Branch Circuit Breaker, 10,000 Amperes Interrupting Capacity	251.50	40.61
		For Bolt-On, Add	*47.23*	
		For Installation In New Panelboard, Deduct	*-22.56*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 28 16 13-0018	EA	3 Pole, 35 To 60 Amperes, 120/240 Volt, Branch Circuit Breaker, 10,000 Amperes Interrupting Capacity	251.50	40.61
		For Bolt-On, Add	*47.23*	
		For Installation In New Panelboard, Deduct	*-22.56*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 28 16 13-0019	EA	3 Pole, 70 To 100 Amperes, 120/240 Volt, Branch Circuit Breaker, 10,000 Amperes Interrupting Capacity	334.64	50.76
		For Bolt-On, Add	*61.57*	
		For Installation In New Panelboard, Deduct	*-28.20*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*33.84*	
26 28 16 13-0020	EA	3 Pole, 110 To 125 Amperes, 120/240 Volt, Branch Circuit Breaker, 10,000 Amperes Interrupting Capacity	538.39	60.91
		For Bolt-On, Add	*90.99*	
		For Installation In New Panelboard, Deduct	*-33.84*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*40.61*	
26 28 16 13-0021	EA	3 Pole, 150 Amperes, 120/240 Volt, Branch Circuit Breaker, 10,000 Amperes Interrupting Capacity	700.36	71.07
		For Bolt-On, Add	*115.18*	
		For Installation In New Panelboard, Deduct	*-39.48*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*47.38*	

26 28 16 13-0022 Branch Circuit Breakers 14,000 Amperes Interrupting Capacity, Plug-On *(26 28 16 13-0001)*

Note: Includes connection of electrical wire.

26 28 16 13-0023	EA	1 Pole, 277/480 Volt, 15 To 30 Amperes, Branch Circuit Breaker, 14,000 Amperes Interrupting Capacity	112.01	20.31
		For Bolt-On, Add	*21.90*	
		For Installation In New Panelboard, Deduct	*-11.28*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 28 16 13-0024	EA	1 Pole, 277/480 Volt, 35 To 60 Amperes, Branch Circuit Breaker, 14,000 Amperes Interrupting Capacity	112.01	20.31
		For Bolt-On, Add	*21.90*	
		For Installation In New Panelboard, Deduct	*-11.28*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 28 16 13-0025	EA	1 Pole, 277/480 Volt, 70 To 100 Amperes, Branch Circuit Breaker, 14,000 Amperes Interrupting Capacity	222.44	25.38
		For Bolt-On, Add	*37.68*	
		For Installation In New Panelboard, Deduct	*-14.10*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.92*	
26 28 16 13-0026	EA	1 Pole GFI, 277/480 Volt, 15 To 60 Amperes, Branch Circuit Breaker, 14,000 Amperes Interrupting Capacity	374.73	25.38
		For Bolt-On, Add	*56.71*	
		For Installation In New Panelboard, Deduct	*-14.10*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.92*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 16 13-0027	EA	2 Pole, 277/480 Volt, 15 To 30 Amperes, Branch Circuit Breaker, 14,000 Amperes Interrupting Capacity	237.31	30.45
		For Bolt-On, Add	*41.51*	
		For Installation In New Panelboard, Deduct	*-16.92*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.30*	
26 28 16 13-0028	EA	2 Pole, 277/480 Volt, 35 To 60 Amperes, Branch Circuit Breaker, 14,000 Amperes Interrupting Capacity	237.31	30.45
		For Bolt-On, Add	*41.51*	
		For Installation In New Panelboard, Deduct	*-16.92*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.30*	
26 28 16 13-0029	EA	2 Pole, 277/480 Volt, 70 To 100 Amperes, Branch Circuit Breaker, 14,000 Amperes Interrupting Capacity	507.00	40.61
		For Bolt-On, Add	*79.17*	
		For Installation In New Panelboard, Deduct	*-22.56*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 28 16 13-0030	EA	2 Pole, 277/480 Volt, 110 To 125 Amperes, Branch Circuit Breaker, 14,000 Amperes Interrupting Capacity	700.07	50.76
		For Bolt-On, Add	*107.25*	
		For Installation In New Panelboard, Deduct	*-28.20*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*33.84*	
26 28 16 13-0031	EA	2 Pole, 277/480 Volt, 150 Amperes, Branch Circuit Breaker, 14,000 Amperes Interrupting Capacity	1,067.15	56.40
		For Bolt-On, Add	*155.11*	
		For Installation In New Panelboard, Deduct	*-31.02*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*37.23*	
26 28 16 13-0032	EA	3 Pole, 277/480 Volt, 15 To 30 Amperes, Branch Circuit Breaker, 14,000 Amperes Interrupting Capacity	394.85	40.61
		For Bolt-On, Add	*65.15*	
		For Installation In New Panelboard, Deduct	*-22.56*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 28 16 13-0033	EA	3 Pole, 277/480 Volt, 35 To 60 Amperes, Branch Circuit Breaker, 14,000 Amperes Interrupting Capacity	394.85	40.61
		For Bolt-On, Add	*65.15*	
		For Installation In New Panelboard, Deduct	*-22.56*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 28 16 13-0034	EA	3 Pole, 277/480 Volt, 70 To 100 Amperes, Branch Circuit Breaker, 14,000 Amperes Interrupting Capacity	610.93	50.76
		For Bolt-On, Add	*96.11*	
		For Installation In New Panelboard, Deduct	*-28.20*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*33.84*	
26 28 16 13-0035	EA	3 Pole, 277/480 Volt, 110 To 125 Amperes, Branch Circuit Breaker, 14,000 Amperes Interrupting Capacity	892.29	60.91
		For Bolt-On, Add	*135.22*	
		For Installation In New Panelboard, Deduct	*-33.84*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*40.61*	
26 28 16 13-0036	EA	3 Pole, 277/480 Volt, 150 Amperes, Branch Circuit Breaker, 14,000 Amperes Interrupting Capacity	1,429.27	71.07
		For Bolt-On, Add	*206.30*	
		For Installation In New Panelboard, Deduct	*-39.48*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*47.38*	
26 28 16 13-0037	EA	3 Pole, 277/480 Volt, 175 Amperes, Branch Circuit Breaker, 14,000 Amperes Interrupting Capacity	1,661.40	76.14
		For Bolt-On, Add	*237.29*	
		For Installation In New Panelboard, Deduct	*-42.30*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*50.76*	
26 28 16 13-0038	EA	3 Pole, 277/480 Volt, 200 Amperes, Branch Circuit Breaker, 14,000 Amperes Interrupting Capacity	1,786.07	81.21
		For Bolt-On, Add	*254.84*	
		For Installation In New Panelboard, Deduct	*-45.12*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*54.14*	
26 28 16 13-0039	EA	3 Pole, 277/480 Volt, 225 Amperes, Branch Circuit Breaker, 14,000 Amperes Interrupting Capacity	2,133.59	86.30
		For Bolt-On, Add	*300.26*	
		For Installation In New Panelboard, Deduct	*-47.94*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*57.53*	

26 28 16 13-0040 Branch Circuit Breakers 18,000 Amperes Interrupting Capacity, Plug-On *(26 28 16 13-0001)*

Note: Includes connection of electrical wire.

26 28 16 13-0041	EA	15 To 30 Amperes, 1 Pole, 240 Volt, Branch Circuit Breaker, 18,000 Amperes Interrupting Capacity	142.86	20.31
		For Bolt-On, Add	*25.75*	
		For Installation In New Panelboard, Deduct	*-11.28*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 28 16 13-0042	EA	35 To 60 Amperes, 1 Pole, 240 Volt, Branch Circuit Breaker, 18,000 Amperes Interrupting Capacity	142.86	20.31
		For Bolt-On, Add	*25.75*	
		For Installation In New Panelboard, Deduct	*-11.28*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 28 16 13-0043	EA	70 To 100 Amperes, 1 Pole, 240 Volt, Branch Circuit Breaker, 18,000 Amperes Interrupting Capacity	252.91	25.38
		For Bolt-On, Add	*41.48*	
		For Installation In New Panelboard, Deduct	*-14.10*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.92*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 16 13-0044	EA	15 To 30 Amperes, 2 Pole, 240 Volt, Branch Circuit Breaker, 18,000 Amperes Interrupting Capacity	317.69	30.45
		For Bolt-On, Add	*51.56*	
		For Installation In New Panelboard, Deduct	*-16.92*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.30*	
26 28 16 13-0045	EA	35 To 60 Amperes, 2 Pole, 240 Volt, Branch Circuit Breaker, 18,000 Amperes Interrupting Capacity	317.69	30.45
		For Bolt-On, Add	*51.56*	
		For Installation In New Panelboard, Deduct	*-16.92*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.30*	
26 28 16 13-0046	EA	70 To 100 Amperes, 2 Pole, 240 Volt, Branch Circuit Breaker, 18,000 Amperes Interrupting Capacity	584.08	40.61
		For Bolt-On, Add	*88.80*	
		For Installation In New Panelboard, Deduct	*-22.56*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 28 16 13-0047	EA	110 To 125 Amperes, 2 Pole, 240 Volt, Branch Circuit Breaker, 18,000 Amperes Interrupting Capacity	1,608.74	50.76
		For Bolt-On, Add	*220.83*	
		For Installation In New Panelboard, Deduct	*-28.20*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*33.84*	
26 28 16 13-0048	EA	15 To 30 Amperes, 3 Pole, 240 Volt, Branch Circuit Breaker, 18,000 Amperes Interrupting Capacity	527.50	40.61
		For Bolt-On, Add	*81.73*	
		For Installation In New Panelboard, Deduct	*-22.56*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 28 16 13-0049	EA	35 To 60 Amperes, 3 Pole, 240 Volt, Branch Circuit Breaker, 18,000 Amperes Interrupting Capacity	527.50	40.61
		For Bolt-On, Add	*81.73*	
		For Installation In New Panelboard, Deduct	*-22.56*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 28 16 13-0050	EA	70 To 100 Amperes, 3 Pole, 240 Volt, Branch Circuit Breaker, 18,000 Amperes Interrupting Capacity	707.47	50.76
		For Bolt-On, Add	*108.17*	
		For Installation In New Panelboard, Deduct	*-28.20*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*33.84*	
26 28 16 13-0051	EA	110 To 125 Amperes, 3 Pole, 240 Volt, Branch Circuit Breaker, 18,000 Amperes Interrupting Capacity	1,995.51	60.91
		For Bolt-On, Add	*273.13*	
		For Installation In New Panelboard, Deduct	*-33.84*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*40.61*	

26 28 16 13-0052 Branch Circuit Breakers 22,000 Amperes Interrupting Capacity, Plug-On *(26 28 16 13-0001)*

Note: Includes connection of electrical wire.

26 28 16 13-0053	EA	15 To 30 Amperes, 1 Pole, 120/240 Volt, Branch Circuit Breaker, 22,000 Amperes Interrupting Capacity	169.04	20.31
		For Bolt-On, Add	*29.03*	
		For Installation In New Panelboard, Deduct	*-11.28*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 28 16 13-0054	EA	35 To 60 Amperes, 1 Pole, 120/240 Volt, Branch Circuit Breaker, 22,000 Amperes Interrupting Capacity	169.04	20.31
		For Bolt-On, Add	*29.03*	
		For Installation In New Panelboard, Deduct	*-11.28*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 28 16 13-0055	EA	70 To 100 Amperes, 1 Pole, 120/240 Volt, Branch Circuit Breaker, 22,000 Amperes Interrupting Capacity	196.24	25.38
		For Bolt-On, Add	*34.40*	
		For Installation In New Panelboard, Deduct	*-14.10*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.92*	
26 28 16 13-0056	EA	15 To 30 Amperes, 1 Pole GFI, 120/240 Volt, Branch Circuit Breaker, 22,000 Amperes Interrupting Capacity	371.23	25.38
		For Bolt-On, Add	*56.27*	
		For Installation In New Panelboard, Deduct	*-14.10*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.92*	
26 28 16 13-0057	EA	15 To 30 Amperes, 2 Pole, 120/240 Volt, Branch Circuit Breaker, 22,000 Amperes Interrupting Capacity	386.01	30.45
		For Bolt-On, Add	*60.10*	
		For Installation In New Panelboard, Deduct	*-16.92*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.30*	
26 28 16 13-0058	EA	35 To 60 Amperes, 2 Pole, 120/240 Volt, Branch Circuit Breaker, 22,000 Amperes Interrupting Capacity	386.01	30.45
		For Bolt-On, Add	*60.10*	
		For Installation In New Panelboard, Deduct	*-16.92*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.30*	
26 28 16 13-0059	EA	70 To 100 Amperes, 2 Pole, 120/240 Volt, Branch Circuit Breaker, 22,000 Amperes Interrupting Capacity	460.30	40.61
		For Bolt-On, Add	*73.33*	
		For Installation In New Panelboard, Deduct	*-22.56*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 28 16 13-0060	EA	110 To 125 Amperes, 2 Pole, 240 Volt, Branch Circuit Breaker, 22,000 Amperes Interrupting Capacity	680.12	50.76
		For Bolt-On, Add	*104.76*	
		For Installation In New Panelboard, Deduct	*-28.20*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*33.84*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 16 13-0061	EA	150 To 225 Amperes, 2 Pole, 240 Volt, Branch Circuit Breaker, 22,000 Amperes Interrupting Capacity	900.59	56.40
		For Bolt-On, Add	*134.29*	
		For Installation In New Panelboard, Deduct	*-31.02*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*37.23*	
26 28 16 13-0062	EA	250 Amperes, 2 Pole, 240 Volt, Branch Circuit Breaker, 22,000 Amperes Interrupting Capacity	1,132.34	65.99
		For Bolt-On, Add	*167.20*	
		For Installation In New Panelboard, Deduct	*-36.66*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*43.99*	
26 28 16 13-0063	EA	300 To 400 Amperes, 2 Pole, 240 Volt, Branch Circuit Breaker, 22,000 Amperes Interrupting Capacity	1,211.17	76.14
		For Bolt-On, Add	*181.01*	
		For Installation In New Panelboard, Deduct	*-42.30*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*50.76*	
26 28 16 13-0064	EA	15 To 30 Amperes, 3 Pole, 120/240 Volt, Branch Circuit Breaker, 22,000 Amperes Interrupting Capacity	461.44	40.61
		For Bolt-On, Add	*73.47*	
		For Installation In New Panelboard, Deduct	*-22.56*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 28 16 13-0065	EA	35 To 60 Amperes, 3 Pole, 120/240 Volt, Branch Circuit Breaker, 22,000 Amperes Interrupting Capacity	461.44	40.61
		For Bolt-On, Add	*73.47*	
		For Installation In New Panelboard, Deduct	*-22.56*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 28 16 13-0066	EA	70 To 100 Amperes, 3 Pole, 120/240 Volt, Branch Circuit Breaker, 22,000 Amperes Interrupting Capacity	534.59	50.76
		For Bolt-On, Add	*86.56*	
		For Installation In New Panelboard, Deduct	*-28.20*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*33.84*	
26 28 16 13-0067	EA	110 To 125 Amperes, 3 Pole, 240 Volt, Branch Circuit Breaker, 22,000 Amperes Interrupting Capacity	847.06	60.91
		For Bolt-On, Add	*129.57*	
		For Installation In New Panelboard, Deduct	*-33.84*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*40.61*	
26 28 16 13-0068	EA	150 To 225 Amperes, 3 Pole, 240 Volt, Branch Circuit Breaker, 22,000 Amperes Interrupting Capacity	1,114.48	78.96
		For Bolt-On, Add	*169.91*	
		For Installation In New Panelboard, Deduct	*-43.71*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*52.45*	
26 28 16 13-0069	EA	250 Amperes, 3 Pole, 240 Volt, Branch Circuit Breaker, 22,000 Amperes Interrupting Capacity	1,389.40	91.37
		For Bolt-On, Add	*209.21*	
		For Installation In New Panelboard, Deduct	*-50.76*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*60.91*	
26 28 16 13-0070	EA	300 To 400 Amperes, 3 Pole, 240 Volt, Branch Circuit Breaker, 22,000 Amperes Interrupting Capacity	1,479.13	97.01
		For Bolt-On, Add	*222.40*	
		For Installation In New Panelboard, Deduct	*-53.58*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*64.30*	

26 28 16 13-0071 Branch Circuit Breakers 25,000 Amperes Interrupting Capacity, Plug-On *(26 28 16 13-0001)*

Note: Includes connection of electrical wire.

26 28 16 13-0072	EA	15 To 30 Amperes, 2 Pole, 240/480 Volt, Branch Circuit Breaker, 25,000 Amperes Interrupting Capacity	403.08	30.45
		For Bolt-On, Add	*62.23*	
		For Installation In New Panelboard, Deduct	*-16.92*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.30*	
26 28 16 13-0073	EA	35 To 60 Amperes, 2 Pole, 240/480 Volt, Branch Circuit Breaker, 25,000 Amperes Interrupting Capacity	403.08	30.45
		For Bolt-On, Add	*62.23*	
		For Installation In New Panelboard, Deduct	*-16.92*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.30*	
26 28 16 13-0074	EA	70 To 100 Amperes, 2 Pole, 240/480 Volt, Branch Circuit Breaker, 25,000 Amperes Interrupting Capacity	625.31	40.61
		For Bolt-On, Add	*93.96*	
		For Installation In New Panelboard, Deduct	*-22.56*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 28 16 13-0075	EA	110 To 125 Amperes, 2 Pole, 240/480 Volt, Branch Circuit Breaker, 25,000 Amperes Interrupting Capacity	1,048.87	50.76
		For Bolt-On, Add	*150.85*	
		For Installation In New Panelboard, Deduct	*-28.20*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*33.84*	
26 28 16 13-0076	EA	150 To 225 Amperes, 2 Pole, 240/480 Volt, Branch Circuit Breaker, 25,000 Amperes Interrupting Capacity	1,667.92	63.17
		For Bolt-On, Add	*233.17*	
		For Installation In New Panelboard, Deduct	*-35.25*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*42.30*	
26 28 16 13-0077	EA	250 Amperes, 2 Pole, 240/480 Volt, Branch Circuit Breaker, 25,000 Amperes Interrupting Capacity	1,903.55	65.99
		For Bolt-On, Add	*263.61*	
		For Installation In New Panelboard, Deduct	*-36.66*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*43.99*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 16 13-0078	EA	300 To 400 Amperes, 2 Pole, 240/480 Volt, Branch Circuit Breaker, 25,000 Amperes Interrupting Capacity	2,071.16	76.14
		For Bolt-On, Add	*288.51*	
		For Installation In New Panelboard, Deduct	*-42.30*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*50.76*	
26 28 16 13-0079	EA	15 To 30 Amperes, 3 Pole, 240/480 Volt, Branch Circuit Breaker, 25,000 Amperes Interrupting Capacity	586.16	40.61
		For Bolt-On, Add	*89.06*	
		For Installation In New Panelboard, Deduct	*-22.56*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 28 16 13-0080	EA	35 To 60 Amperes, 3 Pole, 240/480 Volt, Branch Circuit Breaker, 25,000 Amperes Interrupting Capacity	586.16	40.61
		For Bolt-On, Add	*89.06*	
		For Installation In New Panelboard, Deduct	*-22.56*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 28 16 13-0081	EA	70 To 100 Amperes, 3 Pole, 240/480 Volt, Branch Circuit Breaker, 25,000 Amperes Interrupting Capacity	739.22	50.76
		For Bolt-On, Add	*112.14*	
		For Installation In New Panelboard, Deduct	*-28.20*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*33.84*	
26 28 16 13-0082	EA	110 To 125 Amperes, 3 Pole, 240/480 Volt, Branch Circuit Breaker, 25,000 Amperes Interrupting Capacity	1,309.67	60.91
		For Bolt-On, Add	*187.40*	
		For Installation In New Panelboard, Deduct	*-33.84*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*40.61*	
26 28 16 13-0083	EA	150 To 225 Amperes, 3 Pole, 240/480 Volt, Branch Circuit Breaker, 25,000 Amperes Interrupting Capacity	1,936.66	78.96
		For Bolt-On, Add	*272.68*	
		For Installation In New Panelboard, Deduct	*-43.71*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*52.45*	
26 28 16 13-0084	EA	250 Amperes, 3 Pole, 240/480 Volt, Branch Circuit Breaker, 25,000 Amperes Interrupting Capacity	2,291.04	91.37
		For Bolt-On, Add	*321.91*	
		For Installation In New Panelboard, Deduct	*-50.76*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*60.91*	
26 28 16 13-0085	EA	300 To 400 Amperes, 3 Pole, 240/480 Volt, Branch Circuit Breaker, 25,000 Amperes Interrupting Capacity	2,483.96	97.01
		For Bolt-On, Add	*348.00*	
		For Installation In New Panelboard, Deduct	*-53.58*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*64.30*	

26 28 16 13-0086 Branch Circuit Breakers 30,000 Amperes Interrupting Capacity, Plug-On *(26 28 16 13-0001)*

Note: Includes connection of electrical wire.

26 28 16 13-0087	EA	2 Pole, 240/480 Volt, 15-30 Amperes, Branch Circuit Breaker, 30,000 Amperes Interrupting Capacity	420.04	30.45
		For Bolt-On, Add	*64.35*	
		For Installation In New Panelboard, Deduct	*-16.92*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.30*	
26 28 16 13-0088	EA	2 Pole, 240/480 Volt, 35-60 Amperes, Branch Circuit Breaker, 30,000 Amperes Interrupting Capacity	420.04	30.45
		For Bolt-On, Add	*64.35*	
		For Installation In New Panelboard, Deduct	*-16.92*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.30*	
26 28 16 13-0089	EA	2 Pole, 240/480 Volt, 70-100 Amperes, Branch Circuit Breaker, 30,000 Amperes Interrupting Capacity	781.92	40.61
		For Bolt-On, Add	*113.53*	
		For Installation In New Panelboard, Deduct	*-22.56*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 28 16 13-0090	EA	2 Pole, 240/480 Volt, 110-125 Amperes, Branch Circuit Breaker, 30,000 Amperes Interrupting Capacity	1,483.10	50.76
		For Bolt-On, Add	*205.13*	
		For Installation In New Panelboard, Deduct	*-28.20*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*33.84*	
26 28 16 13-0091	EA	2 Pole, 240/480 Volt, 150-225 Amperes, Branch Circuit Breaker, 30,000 Amperes Interrupting Capacity	2,385.70	63.17
		For Bolt-On, Add	*322.89*	
		For Installation In New Panelboard, Deduct	*-35.25*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*42.30*	
26 28 16 13-0092	EA	2 Pole, 240/480 Volt, 250 Amperes, Branch Circuit Breaker, 30,000 Amperes Interrupting Capacity	2,729.07	65.99
		For Bolt-On, Add	*366.80*	
		For Installation In New Panelboard, Deduct	*-36.66*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*43.99*	
26 28 16 13-0093	EA	2 Pole, 240/480 Volt, 300-400 Amperes, Branch Circuit Breaker, 30,000 Amperees Interrupting Capacity	2,962.01	76.14
		For Bolt-On, Add	*399.86*	
		For Installation In New Panelboard, Deduct	*-42.30*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*50.76*	
26 28 16 13-0094	EA	3 Pole, 240/480 Volt, 15-30 Amperes, Branch Circuit Breaker, 30,000 Amperees Interrupting Capacity	703.61	40.61
		For Bolt-On, Add	*103.74*	
		For Installation In New Panelboard, Deduct	*-22.56*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 16 13-0095	EA	3 Pole, 240/480 Volt, 35-60 Amperes, Branch Circuit Breaker, 30,000 Amperees Interrupting Capacity	703.61	40.61
		For Bolt-On, Add	*103.74*	
		For Installation In New Panelboard, Deduct	*-22.56*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 28 16 13-0096	EA	3 Pole, 240/480 Volt, 70-100 Amperes, Branch Circuit Breaker, 30,000 Amperees Interrupting Capacity	942.81	50.76
		For Bolt-On, Add	*137.59*	
		For Installation In New Panelboard, Deduct	*-28.20*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*33.84*	
26 28 16 13-0097	EA	3 Pole, 240/480 Volt, 110-125 Amperes, Branch Circuit Breaker, 30,000 Amperes Interrupting Capacity	1,805.82	60.91
		For Bolt-On, Add	*249.42*	
		For Installation In New Panelboard, Deduct	*-33.84*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*40.61*	
26 28 16 13-0098	EA	3 Pole, 240/480 Volt, 150-225 Amperes, Branch Circuit Breaker, 30,000 Amperes Interrupting Capacity	2,277.74	78.96
		For Bolt-On, Add	*315.31*	
		For Installation In New Panelboard, Deduct	*-43.71*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*52.45*	
26 28 16 13-0099	EA	3 Pole, 240/480 Volt, 250 Amperes, Branch Circuit Breaker, 30,000 Amperes Interrupting Capacity	3,708.43	91.37
		For Bolt-On, Add	*499.09*	
		For Installation In New Panelboard, Deduct	*-50.76*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*60.91*	
26 28 16 13-0100	EA	3 Pole, 240/480 Volt, 300-400 Amperes, Branch Circuit Breaker, 30,000 Amperes Interrupting Capacity	3,951.49	97.01
		For Bolt-On, Add	*531.44*	
		For Installation In New Panelboard, Deduct	*-53.58*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*64.30*	

26 28 16 13-0101 Branch Circuit Breakers 35,000 Amperes Interrupting Capacity, Plug-On *(26 28 16 13-0001)*

Note: Includes connection of electrical wire.

26 28 16 13-0102	EA	1 Pole, 480 Volt, 15-30 Amperes, Branch Circuit Breaker, 35,000 Amperes Interrupting Capacity	211.79	20.31
		For Bolt-On, Add	*34.37*	
		For Installation In New Panelboard, Deduct	*-11.28*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 28 16 13-0103	EA	1 Pole, 480 Volt, 35-60 Amperes, Branch Circuit Breaker, 35,000 Amperes Interrupting Capacity	211.79	20.31
		For Bolt-On, Add	*34.37*	
		For Installation In New Panelboard, Deduct	*-11.28*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 28 16 13-0104	EA	1 Pole, 480 Volt, 70-100 Amperes, Branch Circuit Breaker, 35,000 Amperes Interrupting Capacity	387.69	25.38
		For Bolt-On, Add	*58.33*	
		For Installation In New Panelboard, Deduct	*-14.10*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.92*	
26 28 16 13-0105	EA	2 Pole, 480 Volt, 15-30 Amperes, Branch Circuit Breaker, 35,000 Amperes Interrupting Capacity	489.51	30.45
		For Bolt-On, Add	*73.03*	
		For Installation In New Panelboard, Deduct	*-16.92*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.30*	
26 28 16 13-0106	EA	2 Pole, 480 Volt, 35-60 Amperes, Branch Circuit Breaker, 35,000 Amperes Interrupting Capacity	489.51	30.45
		For Bolt-On, Add	*73.03*	
		For Installation In New Panelboard, Deduct	*-16.92*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.30*	
26 28 16 13-0107	EA	2 Pole, 480 Volt, 70-100 Amperes, Branch Circuit Breaker, 35,000 Amperes Interrupting Capacity	925.66	40.61
		For Bolt-On, Add	*131.50*	
		For Installation In New Panelboard, Deduct	*-22.56*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 28 16 13-0108	EA	2 Pole, 480 Volt, 110-125 Amperes, Branch Circuit Breaker, 35,000 Amperes Interrupting Capacity	1,770.21	50.76
		For Bolt-On, Add	*241.02*	
		For Installation In New Panelboard, Deduct	*-28.20*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*33.84*	
26 28 16 13-0109	EA	2 Pole, 480 Volt, 150-225 Amperes, Branch Circuit Breaker, 35,000 Amperes Interrupting Capacity	3,519.73	63.17
		For Bolt-On, Add	*464.64*	
		For Installation In New Panelboard, Deduct	*-35.25*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*42.30*	
26 28 16 13-0110	EA	3 Pole, 480 Volt, 15-30 Amperes, Branch Circuit Breaker, 35,000 Amperes Interrupting Capacity	828.95	40.61
		For Bolt-On, Add	*119.41*	
		For Installation In New Panelboard, Deduct	*-22.56*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 28 16 13-0111	EA	3 Pole, 480 Volt, 35-60 Amperes, Branch Circuit Breaker, 35,000 Amperes Interrupting Capacity	828.95	40.61
		For Bolt-On, Add	*119.41*	
		For Installation In New Panelboard, Deduct	*-22.56*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 16 13-0112	EA	3 Pole, 480 Volt, 70-100 Amperes, Branch Circuit Breaker, 35,000 Amperes Interrupting Capacity	1,116.95	50.76
		For Bolt-On, Add	*159.36*	
		For Installation In New Panelboard, Deduct	*-28.20*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*33.84*	
26 28 16 13-0113	EA	3 Pole, 480 Volt, 110-125 Amperes, Branch Circuit Breaker, 35,000 Amperes Interrupting Capacity	2,184.29	60.91
		For Bolt-On, Add	*296.72*	
		For Installation In New Panelboard, Deduct	*-33.84*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*40.61*	
26 28 16 13-0114	EA	3 Pole, 480 Volt, 150-225 Amperes, Branch Circuit Breaker, 35,000 Amperes Interrupting Capacity	4,376.64	78.96
		For Bolt-On, Add	*577.68*	
		For Installation In New Panelboard, Deduct	*-43.71*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*52.45*	

26 28 16 13-0115 Branch Circuit Breakers 42,000 Amperes Interrupting Capacity, Plug-On *(26 28 16 13-0001)*

Note: Includes connection of electrical wire.

26 28 16 13-0116	EA	15 To 30 Amperes, 1 Pole, 240 Volt, Branch Circuit Breaker, 42,000 Amperes Interrupting Capacity	332.23	20.31
		For Bolt-On, Add	*49.42*	
		For Installation In New Panelboard, Deduct	*-11.28*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 28 16 13-0117	EA	35 To 60 Amperes, 1 Pole, 240 Volt, Branch Circuit Breaker, 42,000 Ampere Interrupting Capacity	332.23	20.31
		For Bolt-On, Add	*49.42*	
		For Installation In New Panelboard, Deduct	*-11.28*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 28 16 13-0118	EA	70 To 100 Amperes, 1 Pole, 240 Volt, Branch Circuit Breaker, 42,000 Amperes Interrupting Capacity	515.78	25.38
		For Bolt-On, Add	*74.34*	
		For Installation In New Panelboard, Deduct	*-14.10*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*16.92*	
26 28 16 13-0119	EA	15 To 30 Amperes, 2 Pole, 240 Volt, Branch Circuit Breaker, 42,000 Amperes Interrupting Capacity	628.85	30.45
		For Bolt-On, Add	*90.45*	
		For Installation In New Panelboard, Deduct	*-16.92*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.30*	
26 28 16 13-0120	EA	35 To 60 Amperes, 2 Pole, 240 Volt, Branch Circuit Breaker, 42,000 Amperes Interrupting Capacity	628.85	30.45
		For Bolt-On, Add	*90.45*	
		For Installation In New Panelboard, Deduct	*-16.92*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.30*	
26 28 16 13-0121	EA	70 To 100 Amperes, 2 Pole, 240 Volt, Branch Circuit Breaker, 42,000 Amperes Interrupting Capacity	1,225.63	40.61
		For Bolt-On, Add	*169.00*	
		For Installation In New Panelboard, Deduct	*-22.56*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 28 16 13-0122	EA	110 To 125 Amperes, 2 Pole, 240 Volt, Branch Circuit Breaker, 42,000 Amperes Interrupting Capacity	2,279.18	50.76
		For Bolt-On, Add	*304.64*	
		For Installation In New Panelboard, Deduct	*-28.20*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*33.84*	
26 28 16 13-0123	EA	150 To 225 Amperes, 2 Pole, 240 Volt, Branch Circuit Breaker, 42,000 Amperes Interrupting Capacity	4,652.61	56.40
		For Bolt-On, Add	*603.29*	
		For Installation In New Panelboard, Deduct	*-31.02*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*37.23*	
26 28 16 13-0124	EA	15 To 30 Amperes, 3 Pole, 240 Volt, Branch Circuit Breaker, 42,000 Amperes Interrupting Capacity	1,108.18	40.61
		For Bolt-On, Add	*154.31*	
		For Installation In New Panelboard, Deduct	*-22.56*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 28 16 13-0125	EA	35 To 60 Amperes, 3 Pole, 240 Volt, Branch Circuit Breaker, 42,000 Amperes Interrupting Capacity	1,108.18	40.61
		For Bolt-On, Add	*154.31*	
		For Installation In New Panelboard, Deduct	*-22.56*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 28 16 13-0126	EA	70 To 100 Amperes, 3 Pole, 240 Volt, Branch Circuit Breaker, 42,000 Amperes Interrupting Capacity	1,548.36	50.76
		For Bolt-On, Add	*213.29*	
		For Installation In New Panelboard, Deduct	*-28.20*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*33.84*	
26 28 16 13-0127	EA	110 To 125 Amperes, 3 Pole, 240 Volt, Branch Circuit Breaker, 42,000 Amperes Interrupting Capacity	2,562.75	60.91
		For Bolt-On, Add	*344.03*	
		For Installation In New Panelboard, Deduct	*-33.84*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*40.61*	
26 28 16 13-0128	EA	150 To 225 Amperes, 3 Pole, 240 Volt, Branch Circuit Breaker, 42,000 Amperes Interrupting Capacity	5,851.81	78.96
		For Bolt-On, Add	*762.07*	
		For Installation In New Panelboard, Deduct	*-43.71*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*52.45*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 16 13-0129		Branch Circuit Breakers 65,000 Amperes Interrupting Capacity, Plug-On *(26 28 16 13-0001)*		
		Note: Includes connection of electrical wire.		
26 28 16 13-0130	EA	15 To 30 Amperes, 1 Pole, 240 Volt, Branch Circuit Breaker, 65,000 Amperes Interrupting Capacity	124.34	20.31
		For Bolt-On, Add	*23.44*	
		For Installation In New Panelboard, Deduct	*-11.28*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 28 16 13-0131	EA	15 To 30 Amperes, 2 Pole, 240 Volt, Branch Circuit Breaker, 65,000 Amperes Interrupting Capacity	290.94	30.45
		For Bolt-On, Add	*48.21*	
		For Installation In New Panelboard, Deduct	*-16.92*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.30*	
26 28 16 13-0132	EA	15 To 30 Amperes, 3 Pole, 240 Volt, Branch Circuit Breaker, 65,000 Amperes Interrupting Capacity	479.14	40.61
		For Bolt-On, Add	*75.68*	
		For Installation In New Panelboard, Deduct	*-22.56*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 28 16 13-0133	EA	15 To 30 Amperes, 1 Pole, 480 Volt, Branch Circuit Breaker, 65,000 Amperes Interrupting Capacity	311.59	20.31
		For Bolt-On, Add	*46.84*	
		For Installation In New Panelboard, Deduct	*-11.28*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 28 16 13-0134	EA	35 To 60 Amperes, 1 Pole, 480 Volt, Branch Circuit Breaker, 65,000 Amperes Interrupting Capacity	311.59	20.31
		For Bolt-On, Add	*46.84*	
		For Installation In New Panelboard, Deduct	*-11.28*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*13.54*	
26 28 16 13-0135	EA	70 To 100 Amperes, 1 Pole, 480 Volt, Branch Circuit Breaker, 65,000 Amperes Interrupting Capacity	620.09	40.61
		For Bolt-On, Add	*93.30*	
		For Installation In New Panelboard, Deduct	*-22.56*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 28 16 13-0136	EA	15 To 30 Amperes, 2 Pole, 480 Volt, Branch Circuit Breaker, 65,000 Amperes Interrupting Capacity	743.63	30.45
		For Bolt-On, Add	*104.80*	
		For Installation In New Panelboard, Deduct	*-16.92*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.30*	
26 28 16 13-0137	EA	35 To 60 Amperes, 2 Pole, 480 Volt, Branch Circuit Breaker, 65,000 Amperes Interrupting Capacity	743.63	30.45
		For Bolt-On, Add	*104.80*	
		For Installation In New Panelboard, Deduct	*-16.92*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*20.30*	
26 28 16 13-0138	EA	70 To 100 Amperes, 2 Pole, 480 Volt, Branch Circuit Breaker, 65,000 Amperes Interrupting Capacity	1,484.32	40.61
		For Bolt-On, Add	*201.33*	
		For Installation In New Panelboard, Deduct	*-22.56*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 28 16 13-0139	EA	110 To 125 Amperes, 2 Pole, 480 Volt, Branch Circuit Breaker, 65,000 Amperes Interrupting Capacity	2,566.29	50.76
		For Bolt-On, Add	*340.53*	
		For Installation In New Panelboard, Deduct	*-28.20*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*33.84*	
26 28 16 13-0140	EA	150 To 225 Amperes, 2 Pole, 480 Volt, Branch Circuit Breaker, 65,000 Amperes Interrupting Capacity	5,773.93	63.17
		For Bolt-On, Add	*746.42*	
		For Installation In New Panelboard, Deduct	*-35.25*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*42.30*	
26 28 16 13-0141	EA	15 To 30 Amperes, 3 Pole, 480 Volt, Branch Circuit Breaker, 65,000 Amperes Interrupting Capacity	1,272.38	40.61
		For Bolt-On, Add	*174.84*	
		For Installation In New Panelboard, Deduct	*-22.56*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 28 16 13-0142	EA	35 To 60 Amperes, 3 Pole, 480 Volt, Branch Circuit Breaker, 65,000 Amperes Interrupting Capacity	1,272.38	40.61
		For Bolt-On, Add	*174.84*	
		For Installation In New Panelboard, Deduct	*-22.56*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*27.07*	
26 28 16 13-0143	EA	70 To 100 Amperes, 3 Pole, 480 Volt, Branch Circuit Breaker, 65,000 Amperes Interrupting Capacity	1,786.73	50.76
		For Bolt-On, Add	*243.08*	
		For Installation In New Panelboard, Deduct	*-28.20*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*33.84*	
26 28 16 13-0144	EA	110 To 125 Amperes, 3 Pole, 480 Volt, Branch Circuit Breaker, 65,000 Amperes Interrupting Capacity	2,771.56	60.91
		For Bolt-On, Add	*370.13*	
		For Installation In New Panelboard, Deduct	*-33.84*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*40.61*	
26 28 16 13-0145	EA	150 To 225 Amperes, 3 Pole, 480 Volt, Branch Circuit Breaker, 65,000 Amperes Interrupting Capacity	7,180.24	78.96
		For Bolt-On, Add	*928.13*	
		For Installation In New Panelboard, Deduct	*-43.71*	
		Note: Also for use with new interiors in panelboards.		
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*52.45*	

26 28 16 16 Enclosed Switches *(26 28 16)*

copyright 2026 The Gordian Group, Inc.

	MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 16 16-0001			**Motor And Circuit Disconnects** *(26 28 16 16)* Note: Work includes mounting, material handling, uploading at job site and termination of all conductors entering and leaving the disconnect.		
26 28 16 16-0002			**NEMA 1 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0001)*		
26 28 16 16-0003			**Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0002)* Note: Includes fuses and neutral bar.		
26 28 16 16-0004			**240 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0003)*		
26 28 16 16-0005		EA	30 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	477.11	112.80
26 28 16 16-0006		EA	60 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	774.89	135.92
26 28 16 16-0007		EA	100 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,081.95	159.05
26 28 16 16-0008		EA	200 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,877.56	250.42
26 28 16 16-0009		EA	400 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	4,079.91	389.17
26 28 16 16-0010		EA	600 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	6,858.20	575.28
26 28 16 16-0011		EA	800 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	9,421.26	676.80
26 28 16 16-0012		EA	1,200 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	12,721.09	789.61
26 28 16 16-0013			**600 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0003)*		
26 28 16 16-0014		EA	30 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	754.17	125.32
26 28 16 16-0015		EA	60 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	910.07	151.04
26 28 16 16-0016		EA	100 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,485.81	176.53
26 28 16 16-0017		EA	200 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	2,186.10	278.61
26 28 16 16-0018		EA	400 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	4,876.33	432.25
26 28 16 16-0019		EA	600 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	7,623.03	638.90
26 28 16 16-0020		EA	800 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	11,389.63	751.59
26 28 16 16-0021		EA	1,200 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	15,651.02	877.37
26 28 16 16-0022			**240 Volt Class, 3 Phase, 3 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0003)*		
26 28 16 16-0023		EA	30 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	668.53	177.10
26 28 16 16-0024		EA	60 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,001.04	235.19
26 28 16 16-0025		EA	100 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,381.27	261.13
26 28 16 16-0026		EA	200 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	2,187.62	408.90
26 28 16 16-0027		EA	400 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	4,651.28	671.17
26 28 16 16-0028		EA	600 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	7,657.16	940.20
26 28 16 16-0029			**600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0003)*		
26 28 16 16-0030		EA	30 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	895.17	195.71
26 28 16 16-0031		EA	60 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,130.36	261.13
26 28 16 16-0032		EA	100 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,720.38	293.85
26 28 16 16-0033		EA	200 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	2,524.02	447.82
26 28 16 16-0034		EA	400 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	5,786.54	723.05
26 28 16 16-0035		EA	600 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	9,383.53	1,044.53
26 28 16 16-0036		EA	800 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	15,185.06	1,240.80

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 16 16-0037	EA	1,200 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	19,517.28	1,410.00
26 28 16 16-0038		**240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0003)*		
26 28 16 16-0039	EA	30 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	644.37	177.10
26 28 16 16-0040	EA	60 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	969.83	235.19
26 28 16 16-0041	EA	100 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,324.48	261.13
26 28 16 16-0042	EA	200 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	2,265.72	408.90
26 28 16 16-0043	EA	400 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	5,091.45	671.17
26 28 16 16-0044	EA	600 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	8,319.36	940.20
26 28 16 16-0045	EA	800 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	13,993.70	1,184.41
26 28 16 16-0046	EA	1,200 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	17,317.48	1,353.61
26 28 16 16-0047		**600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0003)*		
26 28 16 16-0048	EA	30 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	983.79	195.71
26 28 16 16-0049	EA	60 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,239.28	261.13
26 28 16 16-0050	EA	100 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,879.63	293.85
26 28 16 16-0051	EA	200 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	2,762.42	447.82
26 28 16 16-0052	EA	400 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	6,295.18	723.05
26 28 16 16-0053	EA	600 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	10,281.86	1,044.53
26 28 16 16-0054	EA	800 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	16,676.51	1,240.80
26 28 16 16-0055	EA	1,200 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	21,128.35	1,410.00
26 28 16 16-0056		**Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0002)*		
26 28 16 16-0057		**240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0056)*		
26 28 16 16-0058	EA	30 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	461.83	163.22
26 28 16 16-0059	EA	60 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	728.32	227.07
26 28 16 16-0060	EA	100 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,025.13	261.13
26 28 16 16-0061	EA	200 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,602.60	417.81
26 28 16 16-0062	EA	400 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	3,294.11	696.32
26 28 16 16-0063	EA	600 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	5,464.28	949.56
26 28 16 16-0064	EA	800 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	7,898.81	1,128.00
26 28 16 16-0065	EA	1,200 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	10,501.66	1,316.49
26 28 16 16-0066		**600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0056)*		
26 28 16 16-0067	EA	30 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	510.19	180.14
26 28 16 16-0068	EA	60 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	825.87	254.82
26 28 16 16-0069	EA	100 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,160.74	290.12
26 28 16 16-0070	EA	200 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,800.29	454.13
26 28 16 16-0071	EA	400 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	3,544.72	746.06
26 28 16 16-0072	EA	600 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	6,044.48	1,044.42
26 28 16 16-0073	EA	800 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	8,810.51	1,128.00

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 16 16-0074	EA	1,200 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	11,750.20	1,316.49
26 28 16 16-0075		**240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0056)*		
26 28 16 16-0076	EA	30 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	529.98	146.64
26 28 16 16-0077	EA	60 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	823.12	204.17
26 28 16 16-0078	EA	100 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,134.14	235.19
26 28 16 16-0079	EA	200 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,777.91	376.18
26 28 16 16-0080	EA	400 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	3,633.19	626.61
26 28 16 16-0081	EA	600 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	5,947.74	854.46
26 28 16 16-0082	EA	800 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	10,500.79	1,015.20
26 28 16 16-0083	EA	1,200 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	13,764.15	1,184.41
26 28 16 16-0084		**480 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0056)*		
26 28 16 16-0085	EA	30 Amperes, 480 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	577.15	161.86
26 28 16 16-0086	EA	60 Amperes, 480 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	902.54	229.55
26 28 16 16-0087	EA	100 Amperes, 480 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,233.80	261.13
26 28 16 16-0088	EA	200 Amperes, 480 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,916.58	408.90
26 28 16 16-0089	EA	400 Amperes, 480 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	3,892.68	671.17
26 28 16 16-0090	EA	600 Amperes, 480 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	6,421.41	940.20
26 28 16 16-0091	EA	800 Amperes, 480 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	11,104.35	1,015.20
26 28 16 16-0092		**600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0056)*		
26 28 16 16-0093	EA	30 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	622.12	162.10
26 28 16 16-0094	EA	60 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	979.23	229.33
26 28 16 16-0095	EA	100 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,358.53	261.13
26 28 16 16-0096	EA	200 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	2,108.70	408.67
26 28 16 16-0097	EA	400 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	4,161.42	671.39
26 28 16 16-0098	EA	600 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	7,216.77	939.97
26 28 16 16-0099	EA	800 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	12,011.93	1,015.20
26 28 16 16-0100	EA	1,200 Amperes, 600 Volt Class, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	15,798.40	1,184.41
26 28 16 16-0101		**240 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0056)*		
26 28 16 16-0102	EA	30 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	961.94	146.87
26 28 16 16-0103	EA	60 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,147.09	204.40
26 28 16 16-0104	EA	100 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,802.34	234.96
26 28 16 16-0105	EA	200 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	2,691.79	375.96
26 28 16 16-0106		**480 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0056)*		
26 28 16 16-0107	EA	30 Amperes, 480 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,040.08	161.86
26 28 16 16-0108	EA	60 Amperes, 480 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,249.69	229.55

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 16 16-0109	EA	100 Amperes, 480 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,949.74	261.13
26 28 16 16-0110	EA	200 Amperes, 480 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	2,895.75	408.90
26 28 16 16-0111		**600 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0056)*		
26 28 16 16-0112	EA	30 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,165.26	162.10
26 28 16 16-0113	EA	60 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,387.76	229.33
26 28 16 16-0114	EA	100 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	2,198.04	261.13
26 28 16 16-0115	EA	200 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	3,257.45	408.67
26 28 16 16-0116		**General Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0002)* Note: Includes fuses and neutral bar.		
26 28 16 16-0117		**240 Volt Class, 1 Phase, 2 Wire, 1 Blade And Fuseholder, General Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0116)*		
26 28 16 16-0118	EA	30 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 1 Blade And Fuseholder, General Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	320.02	98.13
26 28 16 16-0119	EA	60 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 1 Blade And Fuseholder, General Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	444.90	118.10
26 28 16 16-0120	EA	100 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 1 Blade And Fuseholder, General Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	708.73	138.07
26 28 16 16-0121	EA	200 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 1 Blade And Fuseholder, General Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,332.98	217.82
26 28 16 16-0122	EA	400 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 1 Blade And Fuseholder, General Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	3,271.09	337.83
26 28 16 16-0123	EA	600 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 1 Blade And Fuseholder, General Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	6,190.95	500.05
26 28 16 16-0124		**240 Volt Class, 3 Phase, 3 Wire, 2 Blades And Fuseholders, General Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0116)*		
26 28 16 16-0125	EA	30 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 2 Blades And Fuseholders, General Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	431.78	154.20
26 28 16 16-0126	EA	60 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 2 Blades And Fuseholders, General Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	616.96	204.40
26 28 16 16-0127	EA	100 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 2 Blades And Fuseholders, General Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	886.70	227.07
26 28 16 16-0128	EA	200 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 2 Blades And Fuseholders, General Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,609.65	355.44
26 28 16 16-0129	EA	400 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 2 Blades And Fuseholders, General Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	3,766.37	583.86
26 28 16 16-0130	EA	600 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 2 Blades And Fuseholders, General Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	6,832.10	817.35
26 28 16 16-0131		**240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, General Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0116)*		
26 28 16 16-0132	EA	30 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, General Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	490.19	154.20
26 28 16 16-0133	EA	60 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, General Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	711.13	204.40
26 28 16 16-0134	EA	100 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, General Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	972.38	227.07
26 28 16 16-0135	EA	200 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, General Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,825.52	355.44
26 28 16 16-0136	EA	400 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, General Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	4,135.36	583.86
26 28 16 16-0137	EA	600 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, General Duty Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	7,066.01	817.35
26 28 16 16-0138		**General Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0002)*		
26 28 16 16-0139		**240 Volt Class, 1 Phase, 2 Wire, 2 Blades, General Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0138)*		
26 28 16 16-0140	EA	60 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, General Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	435.89	136.48
26 28 16 16-0141	EA	100 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, General Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	593.97	156.90
26 28 16 16-0142	EA	200 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, General Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,399.43	250.76

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 16 16-0143	EA	400 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, General Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	3,068.58	417.36
26 28 16 16-0144	EA	600 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, General Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	5,397.99	568.74
26 28 16 16-0145		240 Volt Class, 3 Phase, 3 Wire, 3 Blades, General Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switches *(26 28 16 16-0138)*		
26 28 16 16-0146	EA	30 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, General Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	412.46	127.69
26 28 16 16-0147	EA	60 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, General Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	563.65	177.66
26 28 16 16-0148	EA	100 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, General Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	894.14	204.40
26 28 16 16-0149	EA	200 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, General Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	1,552.78	327.01
26 28 16 16-0150	EA	400 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, General Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	3,325.05	545.06
26 28 16 16-0151	EA	600 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, General Duty Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Safety Switch	5,749.03	742.91
26 28 16 16-0152		NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switches *(26 28 16 16-0001)*		
26 28 16 16-0153		Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switches *(26 28 16 16-0152)*		
		Note: With fuses, neutral bar, and hub if required.		
26 28 16 16-0154		240 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switches *(26 28 16 16-0153)*		
26 28 16 16-0155	EA	30 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	719.17	132.55
26 28 16 16-0156	EA	60 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	1,172.95	159.05
26 28 16 16-0157	EA	100 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	1,473.67	184.99
26 28 16 16-0158	EA	200 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	2,150.86	282.00
26 28 16 16-0159	EA	400 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	4,848.56	451.20
26 28 16 16-0160	EA	600 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	8,603.02	601.79
26 28 16 16-0161	EA	800 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	13,024.21	676.80
26 28 16 16-0162	EA	1,200 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	17,318.31	789.61
26 28 16 16-0163		600 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switches *(26 28 16 16-0153)*		
26 28 16 16-0164	EA	30 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	1,266.39	176.65
26 28 16 16-0165	EA	60 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	1,504.55	216.58
26 28 16 16-0166	EA	100 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	2,168.24	248.72
26 28 16 16-0167	EA	200 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	3,042.29	373.03
26 28 16 16-0168	EA	400 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	6,732.78	610.36
26 28 16 16-0169	EA	600 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	12,539.38	839.35
26 28 16 16-0170	EA	800 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	18,585.20	966.48
26 28 16 16-0171	EA	1,200 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	20,460.41	1,087.96
26 28 16 16-0172		240 Volt Class, 3 Phase, 3 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switches *(26 28 16 16-0153)*		
26 28 16 16-0173	EA	30 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	895.23	208.68
26 28 16 16-0174	EA	60 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	1,451.73	276.36
26 28 16 16-0175	EA	100 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	1,766.41	303.43
26 28 16 16-0176	EA	200 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	2,607.83	469.82
26 28 16 16-0177	EA	400 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	5,769.66	783.40

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 16 16-0178	EA	600 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	9,770.68	1,044.53
26 28 16 16-0179		**600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switches** *(26 28 16 16-0153)*		
26 28 16 16-0180	EA	30 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	1,410.58	247.37
26 28 16 16-0181	EA	60 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	1,678.50	303.21
26 28 16 16-0182	EA	100 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	2,279.50	348.10
26 28 16 16-0183	EA	200 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	3,302.13	522.26
26 28 16 16-0184	EA	400 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	7,090.62	854.57
26 28 16 16-0185	EA	600 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	13,013.63	1,175.05
26 28 16 16-0186	EA	800 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	18,594.98	1,353.61
26 28 16 16-0187	EA	1,200 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	22,313.21	1,522.80
26 28 16 16-0188		**240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switches** *(26 28 16 16-0153)*		
26 28 16 16-0189	EA	30 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	994.26	208.68
26 28 16 16-0190	EA	60 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	1,454.60	276.36
26 28 16 16-0191	EA	100 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	1,905.67	303.43
26 28 16 16-0192	EA	200 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	2,700.71	469.82
26 28 16 16-0193	EA	400 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	5,854.86	783.40
26 28 16 16-0194	EA	600 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	10,707.83	1,044.53
26 28 16 16-0195	EA	800 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	18,184.68	1,184.41
26 28 16 16-0196	EA	1,200 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	22,736.04	1,353.61
26 28 16 16-0197		**600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switches** *(26 28 16 16-0153)*		
26 28 16 16-0198	EA	30 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	1,467.40	247.60
26 28 16 16-0199	EA	60 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	1,742.39	303.43
26 28 16 16-0200	EA	100 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	2,421.49	347.99
26 28 16 16-0201	EA	200 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	3,394.42	522.26
26 28 16 16-0202	EA	400 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	7,424.30	854.46
26 28 16 16-0203	EA	600 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	13,397.00	1,174.81
26 28 16 16-0204	EA	800 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	19,802.19	1,353.61
26 28 16 16-0205	EA	1,200 Amperes, 600 Volt Class, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	23,904.47	1,522.80
26 28 16 16-0206		**Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switches** *(26 28 16 16-0152)*		
26 28 16 16-0207		**240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switches** *(26 28 16 16-0206)*		
26 28 16 16-0208	EA	30 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	688.27	116.08
26 28 16 16-0209	EA	60 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	1,140.08	160.74
26 28 16 16-0210	EA	100 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	1,514.25	184.32
26 28 16 16-0211	EA	200 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	1,984.64	298.47
26 28 16 16-0212	EA	400 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	4,512.85	497.90

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 16 16-0213	EA	600 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	8,367.80	663.83
26 28 16 16-0214	EA	800 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	13,619.95	789.94
26 28 16 16-0215	EA	1,200 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	18,059.45	902.75
26 28 16 16-0216		600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switches *(26 28 16 16-0206)*		
26 28 16 16-0217	EA	30 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	776.48	127.91
26 28 16 16-0218	EA	60 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	1,293.74	179.02
26 28 16 16-0219	EA	100 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	1,713.22	202.14
26 28 16 16-0220	EA	200 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	2,212.77	313.36
26 28 16 16-0221	EA	400 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	5,145.90	522.26
26 28 16 16-0222	EA	600 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	9,046.00	696.32
26 28 16 16-0223	EA	800 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	14,533.77	827.51
26 28 16 16-0224	EA	1,200 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	19,265.70	939.97
26 28 16 16-0225		240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switches *(26 28 16 16-0206)*		
26 28 16 16-0226	EA	30 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	804.32	174.05
26 28 16 16-0227	EA	60 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	1,300.78	241.05
26 28 16 16-0228	EA	100 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	1,698.57	276.48
26 28 16 16-0229	EA	200 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	2,283.05	447.70
26 28 16 16-0230	EA	400 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	5,082.06	746.74
26 28 16 16-0231	EA	600 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	9,171.33	995.47
26 28 16 16-0232	EA	800 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	14,565.89	1,184.41
26 28 16 16-0233	EA	1,200 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	19,405.80	1,353.61
26 28 16 16-0234		480 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switches *(26 28 16 16-0206)*		
26 28 16 16-0235	EA	30 Amperes, 480 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	872.42	191.76
26 28 16 16-0236	EA	60 Amperes, 480 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	1,414.35	268.58
26 28 16 16-0237	EA	100 Amperes, 480 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	1,833.90	303.21
26 28 16 16-0238	EA	200 Amperes, 480 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	2,426.95	470.04
26 28 16 16-0239	EA	400 Amperes, 480 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	5,411.40	783.28
26 28 16 16-0240	EA	600 Amperes, 480 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	9,781.53	1,044.42
26 28 16 16-0241	EA	800 Amperes, 480 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	15,549.68	1,240.80
26 28 16 16-0242	EA	1,200 Amperes, 480 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	20,709.51	1,410.00
26 28 16 16-0243		600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switches *(26 28 16 16-0206)*		
26 28 16 16-0244	EA	30 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	420.63	191.76
26 28 16 16-0245	EA	60 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	1,472.79	268.58
26 28 16 16-0246	EA	100 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	1,915.37	303.21
26 28 16 16-0247	EA	200 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	2,526.11	470.04
26 28 16 16-0248	EA	400 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	5,668.14	783.28
26 28 16 16-0249	EA	600 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	9,742.30	1,044.42

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 16 16-0250	EA	800 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	15,527.70	1,240.80
26 28 16 16-0251	EA	1,200 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	20,679.60	1,410.00
26 28 16 16-0252		General Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switches *(26 28 16 16-0152)*		
		Note: With fuses, neutral bar, and hub if required.		
26 28 16 16-0253		240 Volt Class, 1 Phase, 2 Wire, 1 Blade And Fuseholder, General Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switches *(26 28 16 16-0252)*		
26 28 16 16-0254	EA	30 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 1 Blade And Fuseholder, General Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	420.56	115.28
26 28 16 16-0255	EA	60 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 1 Blade And Fuseholder, General Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	607.24	138.29
26 28 16 16-0256	EA	100 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 1 Blade And Fuseholder, General Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	810.43	160.85
26 28 16 16-0257	EA	200 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 1 Blade And Fuseholder, General Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	1,710.03	245.22
26 28 16 16-0258	EA	400 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 1 Blade And Fuseholder, General Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	4,300.11	392.32
26 28 16 16-0259	EA	600 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 1 Blade And Fuseholder, General Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	7,719.76	523.39
26 28 16 16-0260		240 Volt Class, 3 Phase, 3 Wire, 2 Blades And Fuseholders, General Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switches *(26 28 16 16-0252)*		
26 28 16 16-0261	EA	30 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 2 Blades And Fuseholders, General Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	554.06	181.72
26 28 16 16-0262	EA	60 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 2 Blades And Fuseholders, General Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	812.03	240.38
26 28 16 16-0263	EA	100 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 2 Blades And Fuseholders, General Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	1,015.74	263.73
26 28 16 16-0264	EA	200 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 2 Blades And Fuseholders, General Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	2,038.21	408.67
26 28 16 16-0265	EA	400 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 2 Blades And Fuseholders, General Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	4,880.59	681.09
26 28 16 16-0266	EA	600 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 2 Blades And Fuseholders, General Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	8,500.27	908.49
26 28 16 16-0267		240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, General Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switches *(26 28 16 16-0252)*		
26 28 16 16-0268	EA	30 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, General Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	635.94	181.61
26 28 16 16-0269	EA	60 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, General Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	894.03	240.38
26 28 16 16-0270	EA	100 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, General Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	1,279.96	263.73
26 28 16 16-0271	EA	200 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, General Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	2,208.90	408.67
26 28 16 16-0272	EA	400 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, General Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	4,990.24	681.20
26 28 16 16-0273	EA	600 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, General Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	9,356.80	908.49
26 28 16 16-0274	EA	800 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, General Duty Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	13,523.70	1,029.19
26 28 16 16-0275		General Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switches *(26 28 16 16-0152)*		
26 28 16 16-0276		240 Volt Class, 1 Phase, 2 Wire, 2 Blades, General Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switches *(26 28 16 16-0275)*		
26 28 16 16-0277	EA	30 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, General Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	381.26	100.96
26 28 16 16-0278	EA	60 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, General Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	638.35	139.76
26 28 16 16-0279	EA	100 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, General Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	663.40	160.29
26 28 16 16-0280	EA	200 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, General Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	1,739.26	259.44
26 28 16 16-0281	EA	400 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, General Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	4,382.49	432.93
26 28 16 16-0282	EA	600 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, General Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	7,831.24	577.20

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 16 16-0283		240 Volt Class, 3 Phase, 3 Wire, 3 Blades, General Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switches *(26 28 16 16-0275)*		
26 28 16 16-0284	EA	30 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, General Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	600.56	151.38
26 28 16 16-0285	EA	60 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, General Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	869.22	209.58
26 28 16 16-0286	EA	100 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, General Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	1,310.37	240.38
26 28 16 16-0287	EA	200 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, General Duty Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Bolt-On Hubs, Safety Switch	2,265.79	389.28
26 28 16 16-0288		NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switches *(26 28 16 16-0001)*		
26 28 16 16-0289		Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switches *(26 28 16 16-0288)*		
		Note: With fuses and neutral bar (stainless steel).		
26 28 16 16-0290		240 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switches *(26 28 16 16-0289)*		
26 28 16 16-0291	EA	30 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	2,045.49	112.80
26 28 16 16-0292	EA	60 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	2,456.92	135.92
26 28 16 16-0293	EA	100 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	5,079.74	158.83
26 28 16 16-0294	EA	200 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	7,008.29	250.65
26 28 16 16-0295	EA	400 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	14,316.27	388.94
26 28 16 16-0296	EA	600 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	20,569.50	575.06
26 28 16 16-0297		600 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switches *(26 28 16 16-0289)*		
26 28 16 16-0298	EA	30 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	2,605.91	125.32
26 28 16 16-0299	EA	60 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	2,891.29	150.93
26 28 16 16-0300	EA	100 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	5,489.52	176.42
26 28 16 16-0301	EA	200 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	7,741.66	278.61
26 28 16 16-0302	EA	400 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	14,851.33	432.48
26 28 16 16-0303	EA	600 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	21,284.03	638.90
26 28 16 16-0304		240 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switches *(26 28 16 16-0289)*		
26 28 16 16-0305	EA	30 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	2,269.81	177.32
26 28 16 16-0306	EA	60 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	2,837.73	234.96
26 28 16 16-0307	EA	100 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	5,519.89	261.13
26 28 16 16-0308	EA	200 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	7,825.36	408.67
26 28 16 16-0309	EA	400 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	15,329.15	671.39
26 28 16 16-0310	EA	600 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	21,886.28	939.97
26 28 16 16-0311		600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switches *(26 28 16 16-0289)*		
26 28 16 16-0312	EA	30 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	2,754.25	195.83
26 28 16 16-0313	EA	60 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	3,119.65	261.13
26 28 16 16-0314	EA	100 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	5,740.10	293.73
26 28 16 16-0315	EA	200 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	8,101.98	447.59
26 28 16 16-0316	EA	400 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	15,814.23	723.05
26 28 16 16-0317	EA	600 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	22,494.16	1,044.42

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 16 16-0318		240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switches *(26 28 16 16-0289)*		
26 28 16 16-0319	EA	30 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	2,732.88	177.32
26 28 16 16-0320	EA	60 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	3,416.63	234.96
26 28 16 16-0321	EA	100 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	6,678.26	261.13
26 28 16 16-0322	EA	200 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	9,409.38	408.67
26 28 16 16-0323	EA	400 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	18,446.71	671.39
26 28 16 16-0324	EA	600 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	26,170.57	939.97
26 28 16 16-0325		600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switches *(26 28 16 16-0289)*		
26 28 16 16-0326	EA	30 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	3,301.44	195.83
26 28 16 16-0327	EA	60 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	3,740.14	261.13
26 28 16 16-0328	EA	100 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	6,922.51	293.73
26 28 16 16-0329	EA	200 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	9,699.24	447.59
26 28 16 16-0330	EA	400 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	18,973.86	723.05
26 28 16 16-0331	EA	600 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	26,836.85	1,044.42
26 28 16 16-0332		Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switches *(26 28 16 16-0288)*		
26 28 16 16-0333		240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switches *(26 28 16 16-0332)*		
26 28 16 16-0334	EA	30 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	1,960.03	112.80
26 28 16 16-0335	EA	60 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	2,374.74	156.90
26 28 16 16-0336	EA	100 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	4,534.56	180.48
26 28 16 16-0337	EA	200 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	6,270.28	288.32
26 28 16 16-0338	EA	400 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	11,440.51	480.08
26 28 16 16-0339	EA	600 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	16,404.38	654.02
26 28 16 16-0340		600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switches *(26 28 16 16-0332)*		
26 28 16 16-0341	EA	30 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	2,231.15	124.42
26 28 16 16-0342	EA	60 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	2,707.08	175.97
26 28 16 16-0343	EA	100 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	5,170.87	200.56
26 28 16 16-0344	EA	200 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	7,133.77	313.36
26 28 16 16-0345	EA	400 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	13,009.00	515.73
26 28 16 16-0346	EA	600 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	18,696.96	721.93
26 28 16 16-0347		240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switches *(26 28 16 16-0332)*		
26 28 16 16-0348	EA	30 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	2,028.18	146.87
26 28 16 16-0349	EA	60 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	2,436.76	204.40
26 28 16 16-0350	EA	100 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	2,530.84	234.96
26 28 16 16-0351	EA	200 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	4,925.57	375.96
26 28 16 16-0352	EA	400 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	6,946.93	626.72

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 16 16-0353	EA	600 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	17,302.62	854.57
26 28 16 16-0354		**600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0332)*		
26 28 16 16-0355	EA	30 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	2,306.35	162.10
26 28 16 16-0356	EA	60 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	2,813.78	229.33
26 28 16 16-0357	EA	100 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	5,292.01	261.13
26 28 16 16-0358	EA	200 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	7,324.35	408.67
26 28 16 16-0359	EA	400 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	14,704.83	671.39
26 28 16 16-0360	EA	600 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	19,701.17	939.97
26 28 16 16-0361		**240 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0332)*		
26 28 16 16-0362	EA	30 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	2,819.86	146.87
26 28 16 16-0363	EA	60 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	3,365.34	204.40
26 28 16 16-0364	EA	100 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	7,699.34	234.96
26 28 16 16-0365	EA	200 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	11,735.45	375.96
26 28 16 16-0366		**600 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0332)*		
26 28 16 16-0367	EA	30 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	3,211.12	162.10
26 28 16 16-0368	EA	60 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	3,837.56	229.33
26 28 16 16-0369	EA	100 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	8,784.33	261.13
26 28 16 16-0370	EA	200 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Stainless Steel Non-Fusible, NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	13,369.90	408.67
26 28 16 16-0371		**Fiberglass Reinforced Polyester NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0288)*		
26 28 16 16-0372		**600 Volt Class, 3 Phase, 3 Pole, Fusible, Fiberglass Reinforced Polyester NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0371)*		
26 28 16 16-0373	EA	30 Amperes, 600 Volt Class, 3 Phase, 3 Pole, Fusible, Fiberglass Reinforced Polyester NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	3,730.21	195.71
26 28 16 16-0374	EA	60 Amperes, 600 Volt Class, 3 Phase, 3 Pole, Fusible, Fiberglass Reinforced Polyester NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	4,230.67	261.13
26 28 16 16-0375	EA	100 Amperes, 600 Volt Class, 3 Phase, 3 Pole, Fusible, Fiberglass Reinforced Polyester NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	7,703.18	293.85
26 28 16 16-0376	EA	200 Amperes, 600 Volt Class, 3 Phase, 3 Pole, Fusible, Fiberglass Reinforced Polyester NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	9,989.99	447.82
26 28 16 16-0377		**600 Volt Class, 3 Phase, 3 Pole, Non-Fusible, Fiberglass Reinforced Polyester NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0371)*		
26 28 16 16-0378	EA	30 Amperes, 600 Volt Class, 3 Phase, 3 Pole, Non-Fusible, Fiberglass Reinforced Polyester NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	3,505.04	161.86
26 28 16 16-0379	EA	60 Amperes, 600 Volt Class, 3 Phase, 3 Pole, Non-Fusible, Fiberglass Reinforced Polyester NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	3,993.74	229.55
26 28 16 16-0380	EA	100 Amperes, 600 Volt Class, 3 Phase, 3 Pole, Non-Fusible, Fiberglass Reinforced Polyester NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	7,291.39	261.13
26 28 16 16-0381	EA	200 Amperes, 600 Volt Class, 3 Phase, 3 Pole, Non-Fusible, Fiberglass Reinforced Polyester NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	9,880.93	408.90
26 28 16 16-0382		**Krydon NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0288)*		
26 28 16 16-0383		**600 Volt Class, 3 Phase, 3 Pole, Fusible, Krydon NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0382)*		
26 28 16 16-0384	EA	30 Amperes, 600 Volt Class, 3 Phase, 3 Pole, Fusible, Krydon NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	4,281.17	195.71

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 16 16-0385	EA	60 Amperes, 600 Volt Class, 3 Phase, 3 Pole, Fusible, Krydon NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	4,847.18	261.13
26 28 16 16-0386	EA	100 Amperes, 600 Volt Class, 3 Phase, 3 Pole, Fusible, Krydon NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	8,869.09	293.85
26 28 16 16-0387		600 Volt Class, 3 Phase, 3 Pole, Non-Fusible, Krydon NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switches *(26 28 16 16-0382)*		
26 28 16 16-0388	EA	30 Amperes, 600 Volt Class, 3 Phase, 3 Pole, Non-Fusible, Krydon NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	4,026.35	161.86
26 28 16 16-0389	EA	60 Amperes, 600 Volt Class, 3 Phase, 3 Pole, Non-Fusible, Krydon NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	4,577.48	229.55
26 28 16 16-0390	EA	100 Amperes, 600 Volt Class, 3 Phase, 3 Pole, Non-Fusible, Krydon NEMA 4, 4X Or 5 Enclosure, Neutral Kit, Safety Switch	8,410.48	261.13
26 28 16 16-0391		NEMA 7 Or 9 Enclosures, Neutral Kit, Safety Switches *(26 28 16 16-0001)* Note: Class 1, groups C and D, division 1 or 2, NEMA 7; Class 2, groups E, F and G, division 1 or 2, NEMA 9; or Class 3, division 1 Or 2, NEMA 9, hazardous locations as defined in NEC article 500.		
26 28 16 16-0392		Heavy-Duty Fusible, NEMA 7 Or 9 Enclosures, Neutral Kit, Safety Switches *(26 28 16 16-0391)* Note: With fuses and neutral bar.		
26 28 16 16-0393	EA	30 Amperes, 240 Volt, 3 Phase, Heavy-Duty Fusible, NEMA 7 Or 9 Enclosure, Neutral Kit, Safety Switch	3,346.18	225.60
26 28 16 16-0394	EA	60 Amperes, 240 Volt, 3 Phase, Heavy-Duty Fusible, NEMA 7 Or 9 Enclosure, Neutral Kit, Safety Switch	3,770.73	268.58
26 28 16 16-0395	EA	100 Amperes, 240 Volt, 3 Phase, Heavy-Duty Fusible, NEMA 7 Or 9 Enclosure, Neutral Kit, Safety Switch	4,178.62	303.21
26 28 16 16-0396	EA	200 Amperes, 240 Volt, 3 Phase, Heavy-Duty Fusible, NEMA 7 Or 9 Enclosure, Neutral Kit, Safety Switch	8,964.69	470.04
26 28 16 16-0397		Heavy-Duty Non-Fusible, NEMA 7 Or 9 Enclosure, Neutral Kit, Safety Switches *(26 28 16 16-0391)*		
26 28 16 16-0398	EA	60 Amperes, 240 Volt, 3 Phase, Heavy-Duty Non-Fusible, NEMA 7 Or 9 Enclosure, Neutral Kit, Safety Switch	2,546.53	268.58
26 28 16 16-0399	EA	100 Amperes, 240 Volt, 3 Phase, Heavy-Duty Non-Fusible, NEMA 7 Or 9 Enclosure, Neutral Kit, Safety Switch	2,986.40	303.21
26 28 16 16-0400	EA	200 Amperes, 240 Volt, 3 Phase, Heavy-Duty Non-Fusible, NEMA 7 Or 9 Enclosure, Neutral Kit, Safety Switch	5,539.41	470.04
26 28 16 16-0401		NEMA 12 Enclosure, Neutral Kit, Safety Switches *(26 28 16 16-0001)*		
26 28 16 16-0402		Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switches *(26 28 16 16-0401)* Note: With fuses and neutral bar.		
26 28 16 16-0403		240 Volt Class, 1 Phase, 2 Pole, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switches *(26 28 16 16-0402)*		
26 28 16 16-0404	EA	30 Amperes, 240 Volt Class, 1 Phase, 2 Pole, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	706.24	112.80
26 28 16 16-0405	EA	60 Amperes, 240 Volt Class, 1 Phase, 2 Pole, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	928.69	135.92
26 28 16 16-0406	EA	100 Amperes, 240 Volt Class, 1 Phase, 2 Pole, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	1,282.22	159.05
26 28 16 16-0407	EA	200 Amperes, 240 Volt Class, 1 Phase, 2 Pole, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	2,172.38	250.42
26 28 16 16-0408	EA	400 Amperes, 240 Volt Class, 1 Phase, 2 Pole, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	4,718.21	389.17
26 28 16 16-0409	EA	600 Amperes, 240 Volt Class, 1 Phase, 2 Pole, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	8,590.48	575.28
26 28 16 16-0410		600 Volt Class, 1 Phase, 2 Pole, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switches *(26 28 16 16-0402)*		
26 28 16 16-0411	EA	30 Amperes, 600 Volt Class, 1 Phase, 2 Pole, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	1,138.13	125.21
26 28 16 16-0412	EA	60 Amperes, 600 Volt Class, 1 Phase, 2 Pole, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	1,161.24	151.15
26 28 16 16-0413	EA	100 Amperes, 600 Volt Class, 1 Phase, 2 Pole, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	1,695.79	176.53
26 28 16 16-0414	EA	200 Amperes, 600 Volt Class, 1 Phase, 2 Pole, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	2,651.70	278.61
26 28 16 16-0415	EA	400 Amperes, 600 Volt Class, 1 Phase, 2 Pole, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	5,884.47	432.03
26 28 16 16-0416	EA	600 Amperes, 600 Volt Class, 1 Phase, 2 Pole, 2 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	11,763.24	639.01
26 28 16 16-0417		240 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switches *(26 28 16 16-0402)*		
26 28 16 16-0418	EA	30 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	969.92	177.10
26 28 16 16-0419	EA	60 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	1,349.59	235.19
26 28 16 16-0420	EA	100 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	1,876.03	261.13

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 16 16-0421	EA	200 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	2,776.81	408.90
26 28 16 16-0422	EA	400 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	5,524.52	671.17
26 28 16 16-0423	EA	600 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	8,947.02	940.20
26 28 16 16-0424		**600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0402)*		
26 28 16 16-0425	EA	30 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	1,314.64	195.71
26 28 16 16-0426	EA	60 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	1,466.47	261.13
26 28 16 16-0427	EA	100 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	2,213.31	293.85
26 28 16 16-0428	EA	200 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	3,209.72	447.82
26 28 16 16-0429	EA	400 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	6,848.96	723.05
26 28 16 16-0430	EA	600 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	13,064.91	1,044.53
26 28 16 16-0431		**240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0402)*		
26 28 16 16-0432	EA	30 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	1,043.39	177.10
26 28 16 16-0433	EA	60 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	1,400.06	235.19
26 28 16 16-0434	EA	100 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	2,034.44	261.13
26 28 16 16-0435	EA	200 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	2,975.69	408.90
26 28 16 16-0436	EA	400 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	6,057.02	671.17
26 28 16 16-0437	EA	600 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	9,306.76	940.20
26 28 16 16-0438		**600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0402)*		
26 28 16 16-0439	EA	30 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	1,399.81	195.71
26 28 16 16-0440	EA	60 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	1,693.66	261.13
26 28 16 16-0441	EA	100 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	2,369.53	293.85
26 28 16 16-0442	EA	200 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	3,507.89	447.82
26 28 16 16-0443	EA	400 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	7,331.73	723.05
26 28 16 16-0444	EA	600 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 3 Blades And Fuseholders, Heavy-Duty Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	13,462.48	1,044.53
26 28 16 16-0445		**Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0401)*		
26 28 16 16-0446		**240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0445)*		
26 28 16 16-0447	EA	30 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	741.99	163.00
26 28 16 16-0448	EA	60 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	979.74	227.29
26 28 16 16-0449	EA	100 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	1,315.05	261.13
26 28 16 16-0450	EA	200 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	1,857.66	417.92
26 28 16 16-0451	EA	400 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	4,174.60	696.55
26 28 16 16-0452	EA	600 Amperes, 240 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	6,672.04	949.78
26 28 16 16-0453		**600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0445)*		
26 28 16 16-0454	EA	30 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	827.78	179.92
26 28 16 16-0455	EA	60 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	1,088.04	254.93

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 16 16-0456	EA	100 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	1,466.04	289.90
26 28 16 16-0457	EA	200 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	2,018.32	454.02
26 28 16 16-0458	EA	400 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	4,415.99	746.17
26 28 16 16-0459	EA	600 Amperes, 600 Volt Class, 1 Phase, 2 Wire, 2 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	7,372.10	1,044.53
26 28 16 16-0460		**240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0445)*		
26 28 16 16-0461	EA	30 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	954.65	146.64
26 28 16 16-0462	EA	60 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	1,249.26	204.17
26 28 16 16-0463	EA	100 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	1,685.93	235.19
26 28 16 16-0464	EA	200 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	2,381.80	376.18
26 28 16 16-0465	EA	400 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	5,117.69	626.61
26 28 16 16-0466	EA	600 Amperes, 240 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	8,157.70	854.46
26 28 16 16-0467		**600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0445)*		
26 28 16 16-0468	EA	30 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	923.36	161.86
26 28 16 16-0469	EA	60 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	1,346.00	229.55
26 28 16 16-0470	EA	100 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	1,800.15	261.13
26 28 16 16-0471	EA	200 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	2,329.61	408.90
26 28 16 16-0472	EA	400 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	5,112.77	671.17
26 28 16 16-0473	EA	600 Amperes, 600 Volt Class, 3 Phase, 3 Wire, 3 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	9,760.60	940.20
26 28 16 16-0474		**240 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0445)*		
26 28 16 16-0475	EA	30 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	1,164.82	146.64
26 28 16 16-0476	EA	60 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	1,368.79	204.17
26 28 16 16-0477	EA	100 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	2,175.58	235.19
26 28 16 16-0478	EA	200 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	3,447.87	376.18
26 28 16 16-0479	EA	400 Amperes, 240 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	6,358.55	479.40
26 28 16 16-0480		**600 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switches** *(26 28 16 16-0445)*		
26 28 16 16-0481	EA	30 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	1,204.51	161.86
26 28 16 16-0482	EA	60 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	1,487.99	229.55
26 28 16 16-0483	EA	100 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	2,318.42	261.13
26 28 16 16-0484	EA	200 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	3,529.43	408.90
26 28 16 16-0485	EA	400 Amperes, 600 Volt Class, 3 Phase, 4 Wire, 4 Blades, Heavy-Duty Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Safety Switch	6,690.90	631.68
26 28 16 16-0486		**Double Throw Safety Switches** *(26 28 16 16-0001)*		
26 28 16 16-0487		**NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switches** *(26 28 16 16-0486)*		
26 28 16 16-0488		**240 Volt Class, 2 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switches** *(26 28 16 16-0487)*		
26 28 16 16-0489	EA	30 Amperes, 240 Volt Class, 2 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	884.53	144.94
26 28 16 16-0490	EA	60 Amperes, 240 Volt Class, 2 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	1,320.89	189.50
26 28 16 16-0491	EA	100 Amperes, 240 Volt Class, 2 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	1,863.15	247.60
26 28 16 16-0492	EA	200 Amperes, 240 Volt Class, 2 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	2,489.18	322.05
26 28 16 16-0493	EA	400 Amperes, 240 Volt Class, 2 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	6,219.33	402.70
26 28 16 16-0494	EA	600 Amperes, 240 Volt Class, 2 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	11,364.64	645.79

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 16 16-0495	EA	800 Amperes, 240 Volt Class, 2 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	12,944.72	902.41
26 28 16 16-0496	EA	1,000 Amperes, 240 Volt Class, 2 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	19,256.44	1,015.20
26 28 16 16-0497	EA	1,200 Amperes, 240 Volt Class, 2 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	22,728.57	1,128.00

26 28 16 16-0498 240 Volt Class, 3 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switches *(26 28 16 16-0487)*

26 28 16 16-0499	EA	30 Amperes, 240 Volt Class, 3 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	1,104.74	203.04
26 28 16 16-0500	EA	60 Amperes, 240 Volt Class, 3 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	1,552.54	265.08
26 28 16 16-0501	EA	100 Amperes, 240 Volt Class, 3 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	2,367.12	346.87
26 28 16 16-0502	EA	200 Amperes, 240 Volt Class, 3 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	3,509.23	451.20
26 28 16 16-0503	EA	400 Amperes, 240 Volt Class, 3 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	8,565.07	564.00
26 28 16 16-0504	EA	600 Amperes, 240 Volt Class, 3 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	11,885.09	902.41
26 28 16 16-0505	EA	800 Amperes, 240 Volt Class, 3 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	13,937.48	1,015.20
26 28 16 16-0506	EA	1,000 Amperes, 240 Volt Class, 3 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	20,119.38	1,128.00
26 28 16 16-0507	EA	1,200 Amperes, 240 Volt Class, 3 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	23,908.70	1,240.80
26 28 16 16-0508	EA	1,600 Amperes, 240 Volt Class, 3 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	27,676.80	1,466.41
26 28 16 16-0509	EA	2,000 Amperes, 240 Volt Class, 3 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	31,487.80	1,692.00
26 28 16 16-0510	EA	2,600 Amperes, 240 Volt Class, 3 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	43,098.43	1,917.61
26 28 16 16-0511	EA	3,000 Amperes, 240 Volt Class, 3 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	47,316.94	2,143.21

26 28 16 16-0512 240 Volt Class, 4 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switches *(26 28 16 16-0487)*

26 28 16 16-0513	EA	30 Amperes, 240 Volt Class, 4 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	1,477.03	253.80
26 28 16 16-0514	EA	60 Amperes, 240 Volt Class, 4 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	2,170.52	331.63
26 28 16 16-0515	EA	100 Amperes, 240 Volt Class, 4 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	3,940.59	433.15
26 28 16 16-0516	EA	200 Amperes, 240 Volt Class, 4 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	5,415.09	562.88
26 28 16 16-0517	EA	400 Amperes, 240 Volt Class, 4 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	11,158.97	705.01
26 28 16 16-0518	EA	600 Amperes, 240 Volt Class, 4 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	13,982.40	1,129.70
26 28 16 16-0519	EA	800 Amperes, 240 Volt Class, 4 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	17,804.59	1,240.80
26 28 16 16-0520	EA	1,000 Amperes, 240 Volt Class, 4 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	23,886.79	1,297.21
26 28 16 16-0521	EA	1,200 Amperes, 240 Volt Class, 4 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	26,851.17	1,353.61
26 28 16 16-0522	EA	1,600 Amperes, 240 Volt Class, 4 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	32,815.27	1,579.21
26 28 16 16-0523	EA	2,000 Amperes, 240 Volt Class, 4 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	37,766.15	1,804.81
26 28 16 16-0524	EA	2,600 Amperes, 240 Volt Class, 4 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	53,950.57	2,030.41
26 28 16 16-0525	EA	3,000 Amperes, 240 Volt Class, 4 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	59,645.23	2,256.01

26 28 16 16-0526 600 Volt Class, 2 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switches *(26 28 16 16-0487)*

26 28 16 16-0527	EA	60 Amperes, 600 Volt Class, 2 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	1,542.26	189.50
26 28 16 16-0528	EA	100 Amperes, 600 Volt Class, 2 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	2,340.63	247.60
26 28 16 16-0529	EA	200 Amperes, 600 Volt Class, 2 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	3,474.66	322.05
26 28 16 16-0530	EA	400 Amperes, 600 Volt Class, 2 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	8,398.16	402.70
26 28 16 16-0531	EA	600 Amperes, 600 Volt Class, 2 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	12,384.22	645.79
26 28 16 16-0532	EA	800 Amperes, 600 Volt Class, 2 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	14,058.76	902.41
26 28 16 16-0533	EA	1,000 Amperes, 600 Volt Class, 2 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	20,979.04	1,015.20
26 28 16 16-0534	EA	1,200 Amperes, 600 Volt Class, 2 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	24,775.84	1,128.00

26 28 16 16-0535 600 Volt Class, 3 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switches *(26 28 16 16-0487)*

26 28 16 16-0536	EA	60 Amperes, 600 Volt Class, 3 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	1,693.24	265.08
26 28 16 16-0537	EA	100 Amperes, 600 Volt Class, 3 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	2,538.52	346.87
26 28 16 16-0538	EA	200 Amperes, 600 Volt Class, 3 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	3,731.91	451.20
26 28 16 16-0539	EA	400 Amperes, 600 Volt Class, 3 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	8,720.51	564.00
26 28 16 16-0540	EA	600 Amperes, 600 Volt Class, 3 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	12,899.26	902.41
26 28 16 16-0541	EA	800 Amperes, 600 Volt Class, 3 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	15,128.19	1,015.20
26 28 16 16-0542	EA	1,000 Amperes, 600 Volt Class, 3 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	20,970.01	1,128.00
26 28 16 16-0543	EA	1,200 Amperes, 600 Volt Class, 3 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	26,051.41	1,240.80
26 28 16 16-0544	EA	1,600 Amperes, 600 Volt Class, 3 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	31,512.12	1,466.41

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 16 16-0545	EA	2,000 Amperes, 600 Volt Class, 3 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	35,843.88	1,692.00
26 28 16 16-0546	EA	2,600 Amperes, 600 Volt Class, 3 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	43,098.37	1,917.61
26 28 16 16-0547	EA	3,000 Amperes, 600 Volt Class, 3 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	51,619.99	2,143.21
26 28 16 16-0548		600 Volt Class, 4 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switches *(26 28 16 16-0487)*		
26 28 16 16-0549	EA	60 Amperes, 600 Volt Class, 4 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	2,308.91	331.63
26 28 16 16-0550	EA	100 Amperes, 600 Volt Class, 4 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	4,141.41	433.15
26 28 16 16-0551	EA	200 Amperes, 600 Volt Class, 4 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	5,828.65	562.88
26 28 16 16-0552	EA	400 Amperes, 600 Volt Class, 4 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	12,041.72	705.01
26 28 16 16-0553	EA	600 Amperes, 600 Volt Class, 4 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	14,972.11	1,129.70
26 28 16 16-0554	EA	800 Amperes, 600 Volt Class, 4 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	19,336.89	1,240.80
26 28 16 16-0555	EA	1,000 Amperes, 600 Volt Class, 4 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	26,016.04	1,297.21
26 28 16 16-0556	EA	1,200 Amperes, 600 Volt Class, 4 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	29,265.56	1,353.61
26 28 16 16-0557	EA	1,600 Amperes, 600 Volt Class, 4 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	35,780.95	1,579.21
26 28 16 16-0558	EA	2,000 Amperes, 600 Volt Class, 4 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	41,181.80	1,804.81
26 28 16 16-0559	EA	2,600 Amperes, 600 Volt Class, 4 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	58,939.56	2,030.41
26 28 16 16-0560	EA	3,000 Amperes, 600 Volt Class, 4 Pole, Non-Fusible, NEMA 1 Enclosure, Neutral Kit, Double Throw Safety Switch	65,158.55	2,256.01
26 28 16 16-0561		NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switches *(26 28 16 16-0486)*		
26 28 16 16-0562		240 Volt Class, 2 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switches *(26 28 16 16-0561)*		
26 28 16 16-0563	EA	100 Amperes, 240 Volt Class, 2 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switch	2,365.14	247.60
26 28 16 16-0564	EA	200 Amperes, 240 Volt Class, 2 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switch	5,570.34	322.05
26 28 16 16-0565	EA	400 Amperes, 240 Volt Class, 2 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switch	18,631.35	402.70
26 28 16 16-0566	EA	600 Amperes, 240 Volt Class, 2 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switch	32,117.69	645.79
26 28 16 16-0567		240 Volt Class, 3 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switches *(26 28 16 16-0561)*		
26 28 16 16-0568	EA	100 Amperes, 240 Volt Class, 3 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switch	3,086.97	346.29
26 28 16 16-0569	EA	200 Amperes, 240 Volt Class, 3 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switch	5,048.56	450.64
26 28 16 16-0570	EA	400 Amperes, 240 Volt Class, 3 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switch	19,121.67	564.00
26 28 16 16-0571	EA	600 Amperes, 240 Volt Class, 3 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switch	20,607.85	904.10
26 28 16 16-0572		240 Volt Class, 4 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switches *(26 28 16 16-0561)*		
26 28 16 16-0573	EA	30 Amperes, 240 Volt Class, 4 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switch	3,022.72	253.91
26 28 16 16-0574	EA	60 Amperes, 240 Volt Class, 4 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switch	3,738.39	331.41
26 28 16 16-0575	EA	100 Amperes, 240 Volt Class, 4 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switch	5,261.63	433.04
26 28 16 16-0576	EA	200 Amperes, 240 Volt Class, 4 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switch	7,645.43	563.10
26 28 16 16-0577	EA	400 Amperes, 240 Volt Class, 4 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switch	13,131.82	705.01
26 28 16 16-0578	EA	600 Amperes, 240 Volt Class, 4 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switch	15,137.42	1,129.81
26 28 16 16-0579		600 Volt Class, 2 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switches *(26 28 16 16-0561)*		
26 28 16 16-0580	EA	60 Amperes, 600 Volt Class, 2 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switch	2,018.12	189.50
26 28 16 16-0581	EA	100 Amperes, 600 Volt Class, 2 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switch	3,095.93	247.60
26 28 16 16-0582	EA	200 Amperes, 600 Volt Class, 2 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switch	5,712.12	322.05
26 28 16 16-0583	EA	400 Amperes, 600 Volt Class, 2 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switch	11,119.64	402.70
26 28 16 16-0584	EA	600 Amperes, 600 Volt Class, 2 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switch	14,795.55	645.79
26 28 16 16-0585		600 Volt Class, 3 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switches *(26 28 16 16-0561)*		
26 28 16 16-0586	EA	60 Amperes, 600 Volt Class, 3 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switch	2,256.13	265.08
26 28 16 16-0587	EA	100 Amperes, 600 Volt Class, 3 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switch	3,431.01	346.29
26 28 16 16-0588	EA	200 Amperes, 600 Volt Class, 3 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switch	6,236.05	450.64
26 28 16 16-0589	EA	400 Amperes, 600 Volt Class, 3 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switch	11,984.88	564.00
26 28 16 16-0590	EA	600 Amperes, 600 Volt Class, 3 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switch	16,020.45	904.10
26 28 16 16-0591		600 Volt Class, 4 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switches *(26 28 16 16-0561)*		
26 28 16 16-0592	EA	60 Amperes, 600 Volt Class, 4 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switch	3,770.49	331.41

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 16 16-0593	EA	100 Amperes, 600 Volt Class, 4 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switch	5,276.34	433.04
26 28 16 16-0594	EA	200 Amperes, 600 Volt Class, 4 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switch	7,849.86	563.10
26 28 16 16-0595	EA	400 Amperes, 600 Volt Class, 4 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switch	13,107.68	705.01
26 28 16 16-0596	EA	600 Amperes, 600 Volt Class, 4 Pole, Non-Fusible, NEMA 3R Enclosure, Neutral Kit, Double Throw Safety Switch	15,270.46	1,129.81
26 28 16 16-0597		NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switches *(26 28 16 16-0486)*		
26 28 16 16-0598		240 Volt Class, 2 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switches *(26 28 16 16-0597)*		
26 28 16 16-0599	EA	30 Amperes, 240 Volt Class, 2 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	2,453.61	145.07
26 28 16 16-0600	EA	60 Amperes, 240 Volt Class, 2 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	2,764.47	189.39
26 28 16 16-0601	EA	100 Amperes, 240 Volt Class, 2 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	3,108.36	247.49
26 28 16 16-0602	EA	200 Amperes, 240 Volt Class, 2 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	4,283.91	321.82
26 28 16 16-0603	EA	400 Amperes, 240 Volt Class, 2 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	8,122.29	402.81
26 28 16 16-0604	EA	600 Amperes, 240 Volt Class, 2 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	11,878.15	645.56
26 28 16 16-0605		240 Volt Class, 3 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switches *(26 28 16 16-0597)*		
26 28 16 16-0606	EA	30 Amperes, 240 Volt Class, 3 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	2,797.91	203.04
26 28 16 16-0607	EA	60 Amperes, 240 Volt Class, 3 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	3,294.75	265.08
26 28 16 16-0608	EA	100 Amperes, 240 Volt Class, 3 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	3,890.98	346.29
26 28 16 16-0609	EA	200 Amperes, 240 Volt Class, 3 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	5,444.22	450.64
26 28 16 16-0610	EA	400 Amperes, 240 Volt Class, 3 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	10,075.65	564.00
26 28 16 16-0611	EA	600 Amperes, 240 Volt Class, 3 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	13,219.85	904.10
26 28 16 16-0612		240 Volt Class, 4 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switches *(26 28 16 16-0597)*		
26 28 16 16-0613	EA	30 Amperes, 240 Volt Class, 4 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	4,209.88	253.91
26 28 16 16-0614	EA	60 Amperes, 240 Volt Class, 4 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	4,905.21	331.41
26 28 16 16-0615	EA	100 Amperes, 240 Volt Class, 4 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	6,737.85	433.04
26 28 16 16-0616	EA	200 Amperes, 240 Volt Class, 4 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	9,166.98	563.10
26 28 16 16-0617	EA	400 Amperes, 240 Volt Class, 4 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	17,171.16	705.01
26 28 16 16-0618	EA	600 Amperes, 240 Volt Class, 4 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	21,185.24	1,129.81
26 28 16 16-0619		600 Volt Class, 2 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switches *(26 28 16 16-0597)*		
26 28 16 16-0620	EA	60 Amperes, 600 Volt Class, 2 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	3,682.98	189.39
26 28 16 16-0621	EA	100 Amperes, 600 Volt Class, 2 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	3,844.13	247.49
26 28 16 16-0622	EA	200 Amperes, 600 Volt Class, 2 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	7,375.58	321.82
26 28 16 16-0623	EA	400 Amperes, 600 Volt Class, 2 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	10,680.14	402.81
26 28 16 16-0624	EA	600 Amperes, 600 Volt Class, 2 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	14,277.73	645.56
26 28 16 16-0625		600 Volt Class, 3 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switches *(26 28 16 16-0597)*		
26 28 16 16-0626	EA	60 Amperes, 600 Volt Class, 3 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	4,008.35	265.08
26 28 16 16-0627	EA	100 Amperes, 600 Volt Class, 3 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	4,218.46	346.29
26 28 16 16-0628	EA	200 Amperes, 600 Volt Class, 3 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	7,986.80	450.64
26 28 16 16-0629	EA	400 Amperes, 600 Volt Class, 3 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	11,521.83	564.00
26 28 16 16-0630	EA	600 Amperes, 600 Volt Class, 3 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	15,474.83	904.10
26 28 16 16-0631		600 Volt Class, 4 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switches *(26 28 16 16-0597)*		
26 28 16 16-0632	EA	60 Amperes, 600 Volt Class, 4 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	4,957.53	331.41
26 28 16 16-0633	EA	100 Amperes, 600 Volt Class, 4 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	7,123.85	433.04
26 28 16 16-0634	EA	200 Amperes, 600 Volt Class, 4 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	9,394.49	563.10
26 28 16 16-0635	EA	400 Amperes, 600 Volt Class, 4 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	17,660.87	705.01
26 28 16 16-0636	EA	600 Amperes, 600 Volt Class, 4 Pole, Non-Fusible, NEMA 12 Enclosure, Neutral Kit, Double Throw Safety Switch	21,834.35	1,129.81
26 28 16 16-0637		Removal And Reinstallation Of Disconnect (Safety) Switches *(26 28 16 16-0001)* Note: Includes storage and cleaning.		
26 28 16 16-0638	EA	Removal And Reinstallation Of Up To 100 Amperes Safety Disconnect Switch	564.00	
26 28 16 16-0639	EA	Removal And Reinstallation Of >100 To 200 Amperes Safety Disconnect Switch	733.23	
26 28 16 16-0640	EA	Removal And Reinstallation Of >200 To 300 Amperes Safety Disconnect Switch	817.87	
26 28 16 16-0641	EA	Removal And Reinstallation Of >300 To 400 Amperes Safety Disconnect Switch	958.86	
26 28 16 16-0642		Bolted Contact Switches *(26 28 16 16)* Note: Work includes mounting, material handling, uploading at job site and termination of all conductors entering and leaving the switch.		
26 28 16 16-0643		Electrical Trip, Bolted Contact Switches *(26 28 16 16-0642)*		
26 28 16 16-0644		Top Feed, Electrical Trip, Bolted Contact Switches *(26 28 16 16-0643)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 28 16 16-0645	EA	800 Amperes, Top Feed, Electrical Trip, Bolted Contact Switch (Eaton CB0833T120480)	10,350.13	1,128.00
26 28 16 16-0646	EA	1,200 Amperes, Top Feed, Electrical Trip, Bolted Contact Switch (Eaton CB1233T120480)	11,148.60	1,353.61
26 28 16 16-0647	EA	1,600 Amperes, Top Feed, Electrical Trip, Bolted Contact Switch (Eaton CB1633T120480)	12,087.32	1,579.21
26 28 16 16-0648	EA	2,000 Amperes, Top Feed, Electrical Trip, Bolted Contact Switch (Eaton CB2033T120480)	12,705.48	1,804.81
26 28 16 16-0649	EA	2,500 Amperes, Top Feed, Electrical Trip, Bolted Contact Switch (Eaton CB2533T120480)	14,352.10	2,030.41
26 28 16 16-0650	EA	3,000 Amperes, Top Feed, Electrical Trip, Bolted Contact Switch (Eaton CB3033T120480)	18,122.43	2,256.01
26 28 16 16-0651	EA	4,000 Amperes, Top Feed, Electrical Trip, Bolted Contact Switch (Eaton CB4033T120480)	24,567.84	2,707.21

26 28 16 16-0652 Bottom Feed, Electrical Trip, Bolted Contact Switches *(26 28 16 16-0643)*

26 28 16 16-0653	EA	800 Amperes, Bottom Feed, Electrical Trip, Bolted Contact Switch (Eaton CB0833B120480)	10,997.92	1,128.00
26 28 16 16-0654	EA	1,200 Amperes, Bottom Feed, Electrical Trip, Bolted Contact Switch (Eaton CB1233B120480)	11,923.28	1,353.61
26 28 16 16-0655	EA	1,600 Amperes, Bottom Feed, Electrical Trip, Bolted Contact Switch (Eaton CB1633B120480)	12,855.32	1,579.21
26 28 16 16-0656	EA	2,000 Amperes, Bottom Feed, Electrical Trip, Bolted Contact Switch (Eaton CB2033B120480)	13,807.41	1,804.81
26 28 16 16-0657	EA	2,500 Amperes, Bottom Feed, Electrical Trip, Bolted Contact Switch (Eaton CB2533B120480)	15,540.84	2,030.41
26 28 16 16-0658	EA	3,000 Amperes, Bottom Feed, Electrical Trip, Bolted Contact Switch (Eaton CB3033B120480)	20,352.98	2,256.01
26 28 16 16-0659	EA	4,000 Amperes, Bottom Feed, Electrical Trip, Bolted Contact Switch (Eaton CB4033B120480)	26,891.89	2,707.21

26 28 16 16-0660 Manually Operated, Bolted Contact Switches *(26 28 16 16-0642)*

26 28 16 16-0661 Top Feed, Manually Operated, Bolted Contact Switches *(26 28 16 16-0660)*

26 28 16 16-0662	EA	800 Amperes, Top Feed, Manually Operated, Bolted Contact Switch (Eaton QA0833T480)	7,438.38	1,128.00
26 28 16 16-0663	EA	1,200 Amperes, Top Feed, Manually Operated, Bolted Contact Switch (Eaton QA1233T480)	8,271.58	1,353.61
26 28 16 16-0664	EA	1,600 Amperes, Top Feed, Manually Operated, Bolted Contact Switch (Eaton QA1633T480)	9,159.54	1,579.21
26 28 16 16-0665	EA	2,000 Amperes, Top Feed, Manually Operated, Bolted Contact Switch (Eaton QA2033T480)	10,039.50	1,804.81
26 28 16 16-0666	EA	2,500 Amperes, Top Feed, Manually Operated, Bolted Contact Switch (Eaton QA2533T480)	10,986.23	2,030.41
26 28 16 16-0667	EA	3,000 Amperes, Top Feed, Manually Operated, Bolted Contact Switch (Eaton QA3033T480)	14,756.56	2,256.01
26 28 16 16-0668	EA	4,000 Amperes, Top Feed, Manually Operated, Bolted Contact Switch (Eaton QA4033T480)	21,121.83	2,707.21

26 28 16 16-0669 Bottom Feed, Manually Operated, Bolted Contact Switches *(26 28 16 16-0660)*

26 28 16 16-0670	EA	800 Amperes, Bottom Feed, Manually Operated, Bolted Contact Switch (Eaton QA0833B480)	7,867.13	1,128.00
26 28 16 16-0671	EA	1,200 Amperes, Bottom Feed, Manually Operated, Bolted Contact Switch (Eaton QA1233B480)	8,919.38	1,353.61
26 28 16 16-0672	EA	1,600 Amperes, Bottom Feed, Manually Operated, Bolted Contact Switch (Eaton QA1633B480)	9,787.31	1,579.21
26 28 16 16-0673	EA	2,000 Amperes, Bottom Feed, Manually Operated, Bolted Contact Switch (Eaton QA2033B480)	10,868.95	1,804.81
26 28 16 16-0674	EA	2,500 Amperes, Bottom Feed, Manually Operated, Bolted Contact Switch (Eaton QA2533B480)	12,028.05	2,030.41
26 28 16 16-0675	EA	3,000 Amperes, Bottom Feed, Manually Operated, Bolted Contact Switch (Eaton QA3033B480)	16,820.15	2,256.01
26 28 16 16-0676	EA	4,000 Amperes, Bottom Feed, Manually Operated, Bolted Contact Switch (Eaton QA4033B480)	23,285.60	2,707.21

26 29 Low-Voltage Controllers *(26 20)*

26 29 13 Enclosed Controllers *(26 29)*

26 29 13 13 Across-The-Line Motor Controllers *(26 29 13)*

26 29 13 13-0001 Manual Motor Starters *(26 29 13 13)*

26 29 13 13-0002 Fractional HP Manual Motor Starters *(26 29 13 13-0001)*

26 29 13 13-0003	EA	NEMA 1, 1 Pole, Toggle Operator, Up To 1 HP, Manual Motor Starter With Thermal Overload Protection (Square D 2510FG1)	231.10	56.50
		For Flush Cover Plate In Lieu Of NEMA 1, Deduct	*-3.28*	
		For Oversized Enclosure, Add	*32.96*	
		For Pilot Light, Add	*48.34*	
26 29 13 13-0004	EA	NEMA 1, 2 Pole, Toggle Operator, Up To 1 HP, Manual Motor Starter With Thermal Overload Protection (Square D 2510FG2)	302.91	73.45
		For Flush Cover Plate In Lieu Of NEMA 1, Deduct	*-3.28*	
		For Oversized Enclosure, Add	*32.96*	
		For Pilot Light, Add	*48.34*	
26 29 13 13-0005	EA	NEMA 1, 1 Pole, Key Operator, Up To 1 HP, Manual Motor Starter With Thermal Overload Protection (Square D 2510FG3)	264.06	56.50
		For Flush Cover Plate In Lieu Of NEMA 1, Deduct	*-3.28*	
		For Oversized Enclosure, Add	*32.96*	
		For Pilot Light, Add	*48.34*	
26 29 13 13-0006	EA	NEMA 1, 2 Pole, Key Operator, Up To 1 HP, Manual Motor Starter With Thermal Overload Protection (Square D 2510FG4)	335.87	73.45
		For Flush Cover Plate In Lieu Of NEMA 1, Deduct	*-3.28*	
		For Oversized Enclosure, Add	*32.96*	
		For Pilot Light, Add	*48.34*	
26 29 13 13-0007	EA	NEMA 1, Handle Guard/Lockoff, 1 Pole, Toggle Operator, Up To 1 HP, Manual Motor Starter With Thermal Overload Protection (Square D 2510FG5)	245.39	56.50
		For Oversized Enclosure, Add	*32.96*	
26 29 13 13-0008	EA	NEMA 1, Handle Guard/Lockoff, 2 Pole, Toggle Operator, Up To 1 HP, Manual Motor Starter With Thermal Overload Protection (Square D 2510FG6)	321.59	73.45
		For Oversized Enclosure, Add	*32.96*	
26 29 13 13-0009	EA	NEMA 4, Handle Guard/Lockoff, 1 Pole, Toggle Operator, Up To 1 HP, Manual Motor Starter With Thermal Overload Protection (Square D 2510FW1)	510.77	67.80
		For Pilot Light, Add	*126.33*	
26 29 13 13-0010	EA	NEMA 4, Handle Guard/Lockoff, 2 Pole, Toggle Operator, Up To 1 HP, Manual Motor Starter With Thermal Overload Protection (Square D 2510FW2)	585.87	84.75
		For Pilot Light, Add	*126.33*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 29 13 13-0011	EA	NEMA 3R, 7 And 9, Handle Guard/Lockoff, 1 Pole, Toggle Operator, Up To 1 HP, Manual Motor Starter With Thermal Overload Protection (Square D 2510FR1)	543.73	67.80
26 29 13 13-0012	EA	NEMA 3R, 7 And 9, Handle Guard/Lockoff, 2 Pole, Toggle Operator, Up To 1 HP, Manual Motor Starter With Thermal Overload Protection (Square D 2510FR2)	615.54	84.75
26 29 13 13-0013		Non-Reversing Manual Motor Starters *(26 29 13 13-0001)*		
26 29 13 13-0014	EA	NEMA 1, Non-Reversing, 2 Pole, Toggle Operator, 2 HP At 115 Volt, 2 HP At 230 Volt, 3 HP At 460 Volt, Manual Motor Starting Switch Without Thermal Overload Protection (Square D 2510KG1) Note: NEMA 1 or flush cover plate installation.	182.96	56.50
		For Oversize Enclosure, Add	*15.90*	
		For Pilot Light, Add	*76.32*	
26 29 13 13-0015	EA	NEMA 1, Non-Reversing, 3 Pole, Toggle Operator, 2 HP At 115 Volt, 7-1/2 HP At 230 Volt, 10 HP At 460 Volt, Manual Motor Starting Switch Without Thermal Overload Protection (Square D 2510KG2) Note: NEMA 1 or flush cover plate installation.	304.84	73.45
		For Oversize Enclosure, Add	*15.90*	
		For Pilot Light, Add	*76.32*	
26 29 13 13-0016	EA	NEMA 1, Non-Reversing, 2 Pole, Toggle Operator, 2 HP At 115 Volt, 3 HP At 230 Volt, 7-1/2 HP At 460 Volt, Manual Motor Starting Switch Without Thermal Overload Protection (Square D 2510KG5) Note: NEMA 1 or flush cover plate installation.	206.98	62.15
		For Oversize Enclosure, Add	*15.90*	
		For Pilot Light, Add	*76.32*	
26 29 13 13-0017	EA	NEMA 1, Non-Reversing, 3 Pole, Toggle Operator, 2 HP At 115 Volt, 7-1/2 HP At 230 Volt, 15 HP At 460 Volt, Manual Motor Starting Switch Without Thermal Overload Protection (Square D 2510KG6) Note: NEMA 1 or flush cover plate installation.	329.92	79.10
		For Oversize Enclosure, Add	*15.90*	
		For Pilot Light, Add	*76.32*	
26 29 13 13-0018	EA	NEMA 1, Non-Reversing, 2 Pole, Key Operator, 2 HP At 115 Volt, 2 HP At 230 Volt, 3 HP At 460 Volt, Manual Motor Starting Switch Without Thermal Overload Protection (Square D 2510KG3) Note: NEMA 1 or flush cover plate installation.	213.70	56.50
		For Oversize Enclosure, Add	*15.90*	
		For Pilot Light, Add	*76.32*	
26 29 13 13-0019	EA	NEMA 1, Non-Reversing, 3 Pole, Key Operator, 2 HP At 115 Volt, 7-1/2 HP At 230 Volt, 10 HP At 460 Volt, Manual Motor Starting Switch Without Thermal Overload Protection (Square D 2510KG4) Note: NEMA 1 or flush cover plate installation.	336.64	73.45
		For Oversize Enclosure, Add	*15.90*	
		For Pilot Light, Add	*76.32*	
26 29 13 13-0020	EA	NEMA 4, Non-Reversing, 2 Pole, Toggle Operator, 2 HP At 115 Volt, 2 HP At 230 Volt, 3 HP At 460 Volt, Manual Motor Starting Switch Without Thermal Overload Protection (Square D 2510KW1)	468.44	67.80
		For Pilot Light, Add	*120.84*	
26 29 13 13-0021	EA	NEMA 4, Non-Reversing, 3 Pole, Toggle Operator, 2 HP At 115 Volt, 7-1/2 HP At 230 Volt, 10 HP At 460 Volt, Manual Motor Starting Switch Without Thermal Overload Protection (Square D 2510KW2)	578.67	84.75
		For Pilot Light, Add	*120.84*	
26 29 13 13-0022	EA	NEMA 4, Non-Reversing, 2 Pole, Toggle Operator, 2 HP At 115 Volt, 3 HP At 230 Volt, 7-1/2 HP At 460 Volt, Manual Motor Starting Switch Without Thermal Overload Protection (Square D 2510KW5)	493.52	73.45
		For Pilot Light, Add	*120.84*	
26 29 13 13-0023	EA	NEMA 4, Non-Reversing, 3 Pole, Toggle Operator, 2 HP At 115 Volt, 7-1/2 HP At 230 Volt, 15 HP At 460 Volt, Manual Motor Starting Switch Without Thermal Overload Protection (Square D 2510KW6)	600.57	90.40
		For Pilot Light, Add	*120.84*	
26 29 13 13-0024	EA	NEMA 3R, 7 And 9, Non-Reversing, 2 Pole, Toggle Operator, 2 HP At 115 Volt, 2 HP At 230 Volt, 3 HP At 460 Volt, Manual Motor Starting Switch Without Thermal Overload Protection (Square D 2510KR1)	498.13	67.80
26 29 13 13-0025	EA	NEMA 3R, 7 And 9, Non-Reversing, 3 Pole, Toggle Operator, 2 HP At 115 Volt, 7-1/2 HP At 230 Volt, 10 HP At 460 Volt, Manual Motor Starting Switch Without Thermal Overload Protection (Square D 2510KR2)	616.83	84.75
26 29 13 13-0026	EA	Open Type, Non-Reversing, 2 Pole, Toggle Operator, 2 HP At 115 Volt, 2 HP At 230 Volt, 3 HP At 460 Volt, Manual Motor Starting Switch Without Thermal Overload Protection (Square D 2510KO1)	134.22	39.55
		For Pilot Light, Add	*76.32*	
26 29 13 13-0027	EA	Open Type, Non-Reversing, 3 Pole, Toggle Operator, 2 HP At 115 Volt, 7-1/2 HP At 230 Volt, 10 HP At 460 Volt, Manual Motor Starting Switch Without Thermal Overload Protection (Square D 2510KO2)	256.10	56.50
		For Pilot Light, Add	*76.32*	
26 29 13 13-0028	EA	Open Type, Non-Reversing, 2 Pole, Toggle Operator, 2 HP At 115 Volt, 3 HP At 230 Volt, 7-1/2 HP At 460 Volt, Manual Motor Starting Switch Without Thermal Overload Protection (Square D 2510KO5)	158.24	45.20
		For Pilot Light, Add	*76.32*	
26 29 13 13-0029	EA	Open Type, Non-Reversing, 3 Pole, Toggle Operator, 2 HP At 115 Volt, 7-1/2 HP At 230 Volt, 15 HP At 460 Volt, Manual Motor Starting Switch Without Thermal Overload Protection (Square D 2510KO6)	280.12	62.15
		For Pilot Light, Add	*76.32*	
26 29 13 13-0030		Reversing Manual Motor Starters *(26 29 13 13-0001)*		
26 29 13 13-0031	EA	NEMA 1, Reversing, 2 Pole, Toggle Operator, 2 HP At 115 Volt, 2 HP At 230 Volt, 3 HP At 460 Volt, Manual Motor Starting Switch Without Thermal Overload Protection (Square D 2511KG11)	507.62	101.70
		For Pilot Light, Add	*122.96*	
26 29 13 13-0032	EA	NEMA 1, Reversing, 3 Pole, Toggle Operator, 2 HP At 115 Volt, 7-1/2 HP At 230 Volt, 10 HP At 460 Volt, Manual Motor Starting Switch Without Thermal Overload Protection (Square D 2511KG22)	738.67	135.60
		For Pilot Light, Add	*122.96*	
26 29 13 13-0033		Two Speed Manual Motor Starters *(26 29 13 13-0001)*		
26 29 13 13-0034	EA	NEMA 1, Two Speed, 2 Pole, Toggle Operator, 2 HP At 115 Volt, 2 HP At 230 Volt, 3 HP At 460 Volt, Manual Motor Starting Switch Without Thermal Overload Protection (Square D 2512KG11)	507.62	101.70
26 29 13 13-0035	EA	NEMA 1, Two Speed, 3 Pole, Toggle Operator, 2 HP At 115 Volt, 7-1/2 HP At 230 Volt, 10 HP At 460 Volt, Manual Motor Starting Switch Without Thermal Overload Protection (Square D 2512KG22)	738.67	135.60
26 29 13 13-0036		Non-Reversing Integral HP Manual Motor Starters *(26 29 13 13-0001)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 29 13 13-0037	EA	NEMA 1, Non-Reversing Integral HP, 2 Pole, Push Button Operator, NEMA Size M-0, Manual Motor Starter With Thermal Overload Protection (Square D 2510MBG1)	472.88	67.80
26 29 13 13-0038	EA	NEMA 1, Non-Reversing Integral HP, 2 Pole, Toggle Operator, NEMA Size M-0, Manual Motor Starter With Thermal Overload Protection (Square D 2510TBG1)	472.88	67.80
26 29 13 13-0039	EA	NEMA 4, Non-Reversing Integral HP, 2 Pole, Push Button Operator, NEMA Size M-0, Manual Motor Starter With Thermal Overload Protection (Square D 2510MBW11)	996.42	79.10
26 29 13 13-0040	EA	NEMA 4X, Non-Reversing Integral HP, 2 Pole, External Toggle Operator To Actuate A Push Button Operator Inside, NEMA Size M-0, Manual Motor Starter With Thermal Overload Protection (Square D 2510MBW1)	996.42	79.10
26 29 13 13-0041	EA	NEMA 7 And 9, Non-Reversing Integral HP, 2 Pole, External Toggle Operator To Actuate A Push Button Operator Inside, NEMA Size M-0, Manual Motor Starter With Thermal Overload Protection (Square D 2510MBR1)	1,308.41	79.10
26 29 13 13-0042	EA	Type 12, Non-Reversing Integral HP, 2 Pole, Push Button Operator, NEMA Size M-0, Manual Motor Starter With Thermal Overload Protection (Square D 2510MBA1)	604.24	79.10
26 29 13 13-0043	EA	Open, Non-Reversing Integral HP, 2 Pole, Push Button Operator, NEMA Size M-0, Manual Motor Starter With Thermal Overload Protection (Square D 2510MBO1)	406.02	50.85
26 29 13 13-0044	EA	NEMA 1, Non-Reversing Integral HP, 2 Pole, Push Button Operator, NEMA Size M-1, Manual Motor Starter With Thermal Overload Protection (Square D 2510MCG1)	563.27	73.45
26 29 13 13-0045	EA	NEMA 1, Non-Reversing Integral HP, 2 Pole, Toggle Operator, NEMA Size M-1, Manual Motor Starter With Thermal Overload Protection (Square D 2510TCG1)	563.27	73.45
26 29 13 13-0046	EA	NEMA 4, Non-Reversing Integral HP, 2 Pole, Push Button Operator, NEMA Size M-1, Manual Motor Starter With Thermal Overload Protection (Square D 2510MCW11)	1,195.58	84.75
26 29 13 13-0047	EA	NEMA 4X, Non-Reversing Integral HP, 2 Pole, External Toggle Operator To Actuate A Push Button Operator Inside, NEMA Size M-1, Manual Motor Starter With Thermal Overload Protection (Square D 2510MCW1)	1,195.58	84.75
26 29 13 13-0048	EA	NEMA 7 And 9, Non-Reversing Integral HP, 2 Pole, External Toggle Operator To Actuate A Push Button Operator Inside, NEMA Size M-1, Manual Motor Starter With Thermal Overload Protection (Square D 2510MCR1)	1,531.73	84.75
26 29 13 13-0049	EA	Type 12, Non-Reversing Integral HP, 2 Pole, Push Button Operator, NEMA Size M-1, Manual Motor Starter With Thermal Overload Protection (Square D 2510MCA1)	694.63	84.75
26 29 13 13-0050	EA	Open, Non-Reversing Integral HP, 2 Pole, Push Button Operator, NEMA Size M-1, Manual Motor Starter With Thermal Overload Protection (Square D 2510MCO1)	496.42	56.50
26 29 13 13-0051	EA	NEMA 1, Non-Reversing Integral HP, 2 Pole, Push Button Operator, NEMA Size M-1P, Manual Motor Starter With Thermal Overload Protection (Square D 2510MCG2)	744.85	79.10
26 29 13 13-0052	EA	NEMA 1, Non-Reversing Integral HP, 2 Pole, Toggle Operator, NEMA Size M-1P, Manual Motor Starter With Thermal Overload Protection (Square D 2510TCG2)	744.85	79.10
26 29 13 13-0053	EA	NEMA 4, Non-Reversing Integral HP, 2 Pole, Push Button Operator, NEMA Size M-1P, Manual Motor Starter With Thermal Overload Protection (Square D 2510MCW12)	1,424.39	90.40
26 29 13 13-0054	EA	NEMA 4X, Non-Reversing Integral HP, 2 Pole, External Toggle Operator To Actuate A Push Button Operator Inside, NEMA Size M-1P, Manual Motor Starter With Thermal Overload Protection (Square D 2510MCW2)	1,424.39	90.40
26 29 13 13-0055	EA	NEMA 7 And 9, Non-Reversing Integral HP, 2 Pole, External Toggle Operator To Actuate A Push Button Operator Inside, NEMA Size M-1P, Manual Motor Starter With Thermal Overload Protection (Square D 2510MCR2)	1,746.27	90.40
26 29 13 13-0056	EA	Type 12, Non-Reversing Integral HP, 2 Pole, Push Button Operator, NEMA Size M-1P, Manual Motor Starter With Thermal Overload Protection (Square D 2510MCA2)	879.50	90.40
26 29 13 13-0057	EA	Open, Non-Reversing Integral HP, 2 Pole, Push Button Operator, NEMA Size M-1P, Manual Motor Starter With Thermal Overload Protection (Square D 2510MCO2)	681.29	62.15
26 29 13 13-0058	EA	NEMA 1, Non-Reversing Integral HP, 3 Pole, Push Button Operator, NEMA Size M-0, Manual Motor Starter With Thermal Overload Protection (Square D 2510MBG2)	585.33	84.75
26 29 13 13-0059	EA	NEMA 1, Non-Reversing Integral HP, 3 Pole, Toggle Operator, NEMA Size M-0, Manual Motor Starter With Thermal Overload Protection (Square D 2510TBG2)	585.33	84.75
26 29 13 13-0060	EA	NEMA 4, Non-Reversing Integral HP, 3 Pole, Push Button Operator, NEMA Size M-0, Manual Motor Starter With Thermal Overload Protection (Square D 2510MBW12)	1,108.87	96.05
26 29 13 13-0061	EA	NEMA 4X, Non-Reversing Integral HP, 3 Pole, External Toggle Operator To Actuate A Push Button Operator Inside, NEMA Size M-0, Manual Motor Starter With Thermal Overload Protection (Square D 2510MBW2)	1,108.87	96.05
26 29 13 13-0062	EA	NEMA 7 And 9, Non-Reversing Integral HP, 3 Pole, External Toggle Operator To Actuate A Push Button Operator Inside, NEMA Size M-0, Manual Motor Starter With Thermal Overload Protection (Square D 2510MBR2)	1,429.65	96.05
26 29 13 13-0063	EA	Type 12, Non-Reversing Integral HP, 3 Pole, Push Button Operator, NEMA Size M-0, Manual Motor Starter With Thermal Overload Protection (Square D 2510MBA2)	717.78	96.05
26 29 13 13-0064	EA	Open, Non-Reversing Integral HP, 3 Pole, Push Button Operator, NEMA Size M-0, Manual Motor Starter With Thermal Overload Protection (Square D 2510MBO2)	521.77	67.80
26 29 13 13-0065	EA	NEMA 1, Non-Reversing Integral HP, 3 Pole, Push Button Operator, NEMA Size M-1, Manual Motor Starter With Thermal Overload Protection (Square D 2510MCG3)	675.73	90.40
26 29 13 13-0066	EA	NEMA 1, Non-Reversing Integral HP, 3 Pole, Toggle Operator, NEMA Size M-1, Manual Motor Starter With Thermal Overload Protection (Square D 2510TCG3)	675.73	90.40
26 29 13 13-0067	EA	NEMA 4, Non-Reversing Integral HP, 3 Pole, Push Button Operator, NEMA Size M-1, Manual Motor Starter With Thermal Overload Protection (Square D 2510MCW13)	1,308.03	101.70
26 29 13 13-0068	EA	NEMA 4X, Non-Reversing Integral HP, 3 Pole, External Toggle Operator To Actuate A Push Button Operator Inside, NEMA Size M-1, Manual Motor Starter With Thermal Overload Protection (Square D 2510MCW3)	1,308.03	101.70
26 29 13 13-0069	EA	NEMA 7 And 9, Non-Reversing Integral HP, 3 Pole, External Toggle Operator To Actuate A Push Button Operator Inside, NEMA Size M-1, Manual Motor Starter With Thermal Overload Protection (Square D 2510MCR3)	1,651.88	101.70
26 29 13 13-0070	EA	Type 12, Non-Reversing Integral HP, 3 Pole, Push Button Operator, NEMA Size M-1, Manual Motor Starter With Thermal Overload Protection (Square D 2510MCA3)	807.09	101.70
26 29 13 13-0071	EA	Open, Non-Reversing Integral HP, 3 Pole, Push Button Operator, NEMA Size M-1, Manual Motor Starter With Thermal Overload Protection (Square D 2510MCO3)	608.87	73.45

26 29 13 13-0072 Reversing Integral HP Manual Motor Starters *(26 29 13 13-0001)*

26 29 13 13-0073	EA	NEMA 1, Reversing Integral HP, 3 Pole, Push Button Operator, NEMA Size M-0, Manual Motor Starter With Thermal Overload Protection (Square D 2511MBG1)	1,389.17	118.65
26 29 13 13-0074	EA	NEMA 1, Reversing Integral HP, 3 Pole, Toggle Operator, NEMA Size M-0, Manual Motor Starter With Thermal Overload Protection (Square D 2511TBG1)	1,389.17	118.65
26 29 13 13-0075	EA	Open, Reversing Integral HP, 3 Pole, Push Button Operator, NEMA Size M-0, Manual Motor Starter With Thermal Overload Protection (Square D 2511MBO1)	1,227.99	84.75
26 29 13 13-0076	EA	NEMA 1, Reversing Integral HP, 3 Pole, Push Button Operator, NEMA Size M-1, Manual Motor Starter With Thermal Overload Protection (Square D 2511MCG1)	1,645.75	129.95
26 29 13 13-0077	EA	Open, Reversing Integral HP, 3 Pole, Push Button Operator, NEMA Size M-1, Manual Motor Starter With Thermal Overload Protection (Square D 2511MCO1)	1,484.58	96.05

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 29 13 13-0078		Two Speed Integral HP Manual Motor Starters *(26 29 13 13-0001)*		
26 29 13 13-0079	EA	NEMA 1, Two Speed Integral HP, 3 Pole, Push Button Operator, NEMA Size M-0, Manual Motor Starter With Thermal Overload Protection (Square D 2512MBG1)	1,389.17	118.65
26 29 13 13-0080	EA	Open, Two Speed Integral HP, 3 Pole, Push Button Operator, NEMA Size M-0, Manual Motor Starter With Thermal Overload Protection (Square D 2512MBO1)	1,227.99	84.75
26 29 13 13-0081	EA	NEMA 1, Two Speed Integral HP, 3 Pole, Push Button Operator, NEMA Size M-1, Manual Motor Starter With Thermal Overload Protection (Square D 2512MCG1)	1,645.75	129.95
26 29 13 13-0082	EA	Open, Two Speed Integral HP, 3 Pole, Push Button Operator, NEMA Size M-1, Manual Motor Starter With Thermal Overload Protection (Square D 2512MCO1)	1,484.58	96.05
26 29 13 13-0083		Magnetic Motor Starters *(26 29 13 13)*		
26 29 13 13-0084		Non-Reversing, Magnetic Contactors *(26 29 13 13-0083)*		
26 29 13 13-0085		Open Enclosure, Non-Reversing, Magnetic Contactors *(26 29 13 13-0084)*		
26 29 13 13-0086	EA	Size 00, 1 Phase, 2 Pole, 1-1/2 HP At 200/230 Volt, 2 HP At 460/575 Volt, 9 Amperes, Open Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SAO11)	541.28	113.00
		For Factory Installed Accessory, Deduct	*-225.99*	
26 29 13 13-0087	EA	Size 00, 3 Phase, 3 Pole, 1-1/2 HP At 200/230 Volt, 2 HP At 460/575 Volt, 9 Amperes, Open Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SAO12)	610.03	124.30
		For Factory Installed Accessory, Deduct	*-248.60*	
26 29 13 13-0088	EA	Size 0, 1 Phase, 1 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 18 Amperes, Open Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SBO5)	587.42	113.00
		For Factory Installed Accessory, Deduct	*-225.99*	
26 29 13 13-0089	EA	Size 0, 1 Phase, 2 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 18 Amperes, Open Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SBO1)	657.26	124.30
		For Factory Installed Accessory, Deduct	*-248.60*	
26 29 13 13-0090	EA	Size 0, 3 Phase, 3 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 18 Amperes, Open Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SBO2)	726.00	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0091	EA	Size 0, 3 Phase, 4 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 18 Amperes, Open Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SBO3)	917.94	169.50
		For Factory Installed Accessory, Deduct	*-339.00*	
26 29 13 13-0092	EA	Size 0, 3 Phase, 5 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 18 Amperes, Open Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SBO4)	1,158.22	203.40
		For Factory Installed Accessory, Deduct	*-406.80*	
26 29 13 13-0093	EA	Size 1, 1 Phase, 1 Pole, 7-1/2 HP At 200/230 Volt, 10 HP At 460/575 Volt, 27 Amperes, Open Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SCO5)	686.93	124.30
		For Factory Installed Accessory, Deduct	*-248.60*	
26 29 13 13-0094	EA	Size 1, 1 Phase, 2 Pole, 7-1/2 HP At 200/230 Volt, 10 HP At 460/575 Volt, 27 Amperes, Open Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SCO1)	755.67	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0095	EA	Size 1, 3 Phase, 3 Pole, 7-1/2 HP At 200/230 Volt, 10 HP At 460/575 Volt, 27 Amperes, Open Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SCO2)	826.59	146.90
		For Factory Installed Accessory, Deduct	*-293.79*	
26 29 13 13-0096	EA	Size 1, 3 Phase, 4 Pole, 7-1/2 HP At 200/230 Volt, 10 HP At 460/575 Volt, 27 Amperes, Open Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SCO3)	1,053.53	197.75
		For Factory Installed Accessory, Deduct	*-395.49*	
26 29 13 13-0097	EA	Size 1, 3 Phase, 5 Pole, 7-1/2 HP At 200/230 Volt, 10 HP At 460/575 Volt, 27 Amperes, Open Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SCO4)	1,292.70	231.65
		For Factory Installed Accessory, Deduct	*-463.29*	
26 29 13 13-0098	EA	Size 2, 1 Phase, 2 Pole, 10 HP At 200 Volt, 15 HP At 230 Volt, 25 HP At 460/575 Volt, 45 Amperes, Open Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SDO1)	1,179.71	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0099	EA	Size 2, 3 Phase, 3 Pole, 10 HP At 200 Volt, 15 HP At 230 Volt, 25 HP At 460/575 Volt, 45 Amperes, Open Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SDO2)	1,307.93	169.50
		For Factory Installed Accessory, Deduct	*-339.00*	
26 29 13 13-0100	EA	Size 2, 3 Phase, 4 Pole, 10 HP At 200 Volt, 15 HP At 230 Volt, 25 HP At 460/575 Volt, 45 Amperes, Open Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SDO3)	1,703.26	225.99
		For Factory Installed Accessory, Deduct	*-452.00*	
26 29 13 13-0101	EA	Size 3, 1 Phase, 2 Pole, 25 HP At 200 Volt, 30 HP At 230 Volt, 50 HP At 460/575 Volt, 90 Amperes, Open Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SEO1)	1,778.11	169.50
		For Factory Installed Accessory, Deduct	*-339.00*	
26 29 13 13-0102	EA	Size 3, 3 Phase, 3 Pole, 25 HP At 200 Volt, 30 HP At 230 Volt, 50 HP At 460/575 Volt, 90 Amperes, Open Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SEO2)	2,017.45	225.99
		For Factory Installed Accessory, Deduct	*-452.00*	
26 29 13 13-0103	EA	Size 3, 3 Phase, 4 Pole, 25 HP At 200 Volt, 30 HP At 230 Volt, 50 HP At 460/575 Volt, 90 Amperes, Open Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SEO3)	2,567.67	282.50
		For Factory Installed Accessory, Deduct	*-564.99*	
26 29 13 13-0104	EA	Size 3, 3 Phase, 5 Pole, 25 HP At 200 Volt, 30 HP At 230 Volt, 50 HP At 460/575 Volt, 90 Amperes, Open Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SEO4)	3,682.55	339.00
		For Factory Installed Accessory, Deduct	*-677.99*	
26 29 13 13-0105	EA	Size 4, 1 Phase, 2 Pole, 40 HP At 200 Volt, 50 HP At 230 Volt, 100 HP At 460/575 Volt, 135 Amperes, Open Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SFO1)	4,038.64	282.50
		For Factory Installed Accessory, Deduct	*-564.99*	
26 29 13 13-0106	EA	Size 4, 3 Phase, 3 Pole, 40 HP At 200 Volt, 50 HP At 230 Volt, 100 HP At 460/575 Volt, 135 Amperes, Open Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SFO2)	4,433.97	339.00
		For Factory Installed Accessory, Deduct	*-677.99*	
26 29 13 13-0107	EA	Size 4, 3 Phase, 4 Pole, 40 HP At 200 Volt, 50 HP At 230 Volt, 100 HP At 460/575 Volt, 135 Amperes, Open Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SFO3)	6,016.85	395.49
		For Factory Installed Accessory, Deduct	*-791.00*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 29 13 13-0108	EA	Size 5, 1 Phase, 2 Pole, 75 HP At 200 Volt, 100 HP At 230 Volt, 200 HP At 460/575 Volt, 270 Amperes, Open Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SGO1)	8,205.33	339.00
		For Factory Installed Accessory, Deduct	*-677.99*	
26 29 13 13-0109	EA	Size 5, 3 Phase, 3 Pole, 75 HP At 200 Volt, 100 HP At 230 Volt, 200 HP At 460/575 Volt, 270 Amperes, Open Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SGO2)	9,089.37	452.00
		For Factory Installed Accessory, Deduct	*-903.99*	
26 29 13 13-0110	EA	Size 6, 3 Phase, 3 Pole, 150 HP At 200 Volt, 200 HP At 230 Volt, 400 HP At 460/575 Volt, 540 Amperes, Open Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SHO2)	23,699.62	677.99
		For Factory Installed Accessory, Deduct	*-1,355.99*	
26 29 13 13-0111	EA	Size 7, 3 Phase, 3 Pole, 300 HP At 230 Volt, 600 HP At 460/575 Volt, 810 Amperes, Open Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SJO2)	33,923.01	1,016.99
		For Factory Installed Accessory, Deduct	*-2,033.98*	

26 29 13 13-0112 NEMA 1, Non-Reversing, Magnetic Contactors *(26 29 13 13-0084)*

26 29 13 13-0113	EA	Size 00, 1 Phase, 2 Pole, 1-1/2 HP At 200/230 Volt, 2 HP At 460/575 Volt, 9 Amperes, NEMA 1 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SAG11)	575.33	113.00
		For Factory Installed Accessory, Deduct	*-225.99*	
26 29 13 13-0114	EA	Size 00, 3 Phase, 3 Pole, 1-1/2 HP At 200/230 Volt, 2 HP At 460/575 Volt, 9 Amperes, NEMA 1 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SAG12)	644.08	124.30
		For Factory Installed Accessory, Deduct	*-248.60*	
26 29 13 13-0115	EA	Size 0, 1 Phase, 1 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 18 Amperes, NEMA 1 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SBG5)	621.47	113.00
		For Factory Installed Accessory, Deduct	*-225.99*	
26 29 13 13-0116	EA	Size 0, 1 Phase, 2 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 18 Amperes, NEMA 1 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SBG1)	692.42	124.30
		For Factory Installed Accessory, Deduct	*-248.60*	
26 29 13 13-0117	EA	Size 0, 3 Phase, 3 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 18 Amperes, NEMA 1 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SBG2)	761.16	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0118	EA	Size 0, 3 Phase, 4 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 18 Amperes, NEMA 1 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SBG3)	955.29	169.50
		For Factory Installed Accessory, Deduct	*-339.00*	
26 29 13 13-0119	EA	Size 0, 3 Phase, 5 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 18 Amperes, NEMA 1 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SBG4)	1,196.67	203.40
		For Factory Installed Accessory, Deduct	*-406.80*	
26 29 13 13-0120	EA	Size 1, 1 Phase, 1 Pole, 7-1/2 HP At 200/230 Volt, 10 HP At 460/575 Volt, 27 Amperes, NEMA 1 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SCG5)	723.18	124.30
		For Factory Installed Accessory, Deduct	*-248.60*	
26 29 13 13-0121	EA	Size 1, 1 Phase, 2 Pole, 7-1/2 HP At 200/230 Volt, 10 HP At 460/575 Volt, 27 Amperes, NEMA 1 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SCG1)	794.12	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0122	EA	Size 1, 3 Phase, 3 Pole, 7-1/2 HP At 200/230 Volt, 10 HP At 460/575 Volt, 27 Amperes, NEMA 1 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SCG2)	862.84	146.90
		For Factory Installed Accessory, Deduct	*-293.79*	
26 29 13 13-0123	EA	Size 1, 3 Phase, 4 Pole, 7-1/2 HP At 200/230 Volt, 10 HP At 460/575 Volt, 27 Amperes, NEMA 1 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SCG3)	1,090.88	197.75
		For Factory Installed Accessory, Deduct	*-395.49*	
26 29 13 13-0124	EA	Size 1, 3 Phase, 5 Pole, 7-1/2 HP At 200/230 Volt, 10 HP At 460/575 Volt, 27 Amperes, NEMA 1 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SCG4)	1,328.96	231.65
		For Factory Installed Accessory, Deduct	*-463.29*	
26 29 13 13-0125	EA	Size 2, 1 Phase, 2 Pole, 10 HP At 200 Volt, 15 HP At 230 Volt, 25 HP At 460/575 Volt, 45 Amperes, NEMA 1 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SDG1)	1,342.30	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0126	EA	Size 2, 3 Phase, 3 Pole, 10 HP At 200 Volt, 15 HP At 230 Volt, 25 HP At 460/575 Volt, 45 Amperes, NEMA 1 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SDG2)	1,471.62	169.50
		For Factory Installed Accessory, Deduct	*-339.00*	
26 29 13 13-0127	EA	Size 2, 3 Phase, 4 Pole, 10 HP At 200 Volt, 15 HP At 230 Volt, 25 HP At 460/575 Volt, 45 Amperes, NEMA 1 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SDG3)	1,865.85	225.99
		For Factory Installed Accessory, Deduct	*-452.00*	
26 29 13 13-0128	EA	Size 3, 1 Phase, 2 Pole, 25 HP At 200 Volt, 30 HP At 230 Volt, 50 HP At 460/575 Volt, 90 Amperes, NEMA 1 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SEG1)	2,097.80	169.50
		For Factory Installed Accessory, Deduct	*-339.00*	
26 29 13 13-0129	EA	Size 3, 3 Phase, 3 Pole, 25 HP At 200 Volt, 30 HP At 230 Volt, 50 HP At 460/575 Volt, 90 Amperes, NEMA 1 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SEG2)	2,336.03	225.99
		For Factory Installed Accessory, Deduct	*-452.00*	
26 29 13 13-0130	EA	Size 3, 3 Phase, 4 Pole, 25 HP At 200 Volt, 30 HP At 230 Volt, 50 HP At 460/575 Volt, 90 Amperes, NEMA 1 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SEG3)	2,887.35	282.50
		For Factory Installed Accessory, Deduct	*-564.99*	
26 29 13 13-0131	EA	Size 4, 1 Phase, 2 Pole, 40 HP At 200 Volt, 50 HP At 230 Volt, 100 HP At 460/575 Volt, 135 Amperes, NEMA 1 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SFG1)	4,701.07	282.50
		For Factory Installed Accessory, Deduct	*-564.99*	
26 29 13 13-0132	EA	Size 4, 3 Phase, 3 Pole, 40 HP At 200 Volt, 50 HP At 230 Volt, 100 HP At 460/575 Volt, 135 Amperes, NEMA 1 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SFG2)	5,096.40	339.00
		For Factory Installed Accessory, Deduct	*-677.99*	
26 29 13 13-0133	EA	Size 5, 3 Phase, 3 Pole, 75 HP At 200 Volt, 100 HP At 230 Volt, 200 HP At 460/575 Volt, 270 Amperes, NEMA 1 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SGG2)	10,296.69	452.00
		For Factory Installed Accessory, Deduct	*-903.99*	
26 29 13 13-0134	EA	Size 6, 3 Phase, 3 Pole, 150 HP At 200 Volt, 200 HP At 230 Volt, 400 HP At 460/575 Volt, 540 Amperes, NEMA 1 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SHG2)	29,008.97	677.99
		For Factory Installed Accessory, Deduct	*-1,355.99*	
26 29 13 13-0135	EA	Size 7, 3 Phase, 3 Pole, 300 HP At 230 Volt, 600 HP At 460/575 Volt, 810 Amperes, NEMA 1 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SJG2)	39,247.73	1,016.99
		For Factory Installed Accessory, Deduct	*-2,033.98*	

copyright 2026 The Gordian Group, Inc.

	MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 29 13 13-0136			NEMA 12, Non-Reversing, Magnetic Contactors *(26 29 13 13-0084)*		
26 29 13 13-0137		EA	Size 0, 1 Phase, 2 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 18 Amperes, NEMA 12 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SBA1)	880.27	124.30
			For Factory Installed Accessory, Deduct	*-248.60*	
26 29 13 13-0138		EA	Size 0, 3 Phase, 3 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 18 Amperes, NEMA 12 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SBA2)	949.01	135.60
			For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0139		EA	Size 1, 3 Phase, 3 Pole, 7-1/2 HP At 200/230 Volt, 10 HP At 460/575 Volt, 27 Amperes, NEMA 12 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SCA2)	1,050.70	146.90
			For Factory Installed Accessory, Deduct	*-293.79*	
26 29 13 13-0140		EA	Size 2, 1 Phase, 2 Pole, 10 HP At 200 Volt, 15 HP At 230 Volt, 25 HP At 460/575 Volt, 45 Amperes, NEMA 12 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SDA1)	1,685.05	135.60
			For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0141		EA	Size 2, 3 Phase, 3 Pole, 10 HP At 200 Volt, 15 HP At 230 Volt, 25 HP At 460/575 Volt, 45 Amperes, NEMA 12 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SDA2)	1,815.47	169.50
			For Factory Installed Accessory, Deduct	*-339.00*	
26 29 13 13-0142		EA	Size 3, 1 Phase, 2 Pole, 25 HP At 200 Volt, 30 HP At 230 Volt, 50 HP At 460/575 Volt, 90 Amperes, NEMA 12 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SEA1)	2,504.26	169.50
			For Factory Installed Accessory, Deduct	*-339.00*	
26 29 13 13-0143		EA	Size 3, 3 Phase, 3 Pole, 25 HP At 200 Volt, 30 HP At 230 Volt, 50 HP At 460/575 Volt, 90 Amperes, NEMA 12 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SEA2)	2,741.40	225.99
			For Factory Installed Accessory, Deduct	*-452.00*	
26 29 13 13-0144		EA	Size 4, 3 Phase, 3 Pole, 40 HP At 200 Volt, 50 HP At 230 Volt, 100 HP At 460/575 Volt, 135 Amperes, NEMA 12 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SFA2)	6,442.14	339.00
			For Factory Installed Accessory, Deduct	*-677.99*	
26 29 13 13-0145		EA	Size 5, 3 Phase, 3 Pole, 75 HP At 200 Volt, 100 HP At 230 Volt, 200 HP At 460/575 Volt, 270 Amperes, NEMA 12 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SGA2)	13,740.68	452.00
			For Factory Installed Accessory, Deduct	*-903.99*	
26 29 13 13-0146		EA	Size 6, 3 Phase, 3 Pole, 150 HP At 200 Volt, 200 HP At 230 Volt, 400 HP At 460/575 Volt, 540 Amperes, NEMA 12 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SHA2)	33,231.84	677.99
			For Factory Installed Accessory, Deduct	*-1,355.99*	
26 29 13 13-0147			NEMA 4/4X, Non-Reversing, Magnetic Contactors *(26 29 13 13-0084)*		
			Note: Brushed stainless steel enclosure.		
26 29 13 13-0148		EA	Size 0, 3 Phase, 3 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 18 Amperes, NEMA 4/4X Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SBW12)	1,309.34	135.60
			For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0149		EA	Size 1, 1 Phase, 2 Pole, 7-1/2 HP At 200/230 Volt, 10 HP At 460/575 Volt, 27 Amperes, NEMA 4/4X Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SCW11)	1,357.68	135.60
			For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0150		EA	Size 1, 3 Phase, 3 Pole, 7-1/2 HP At 200/230 Volt, 10 HP At 460/575 Volt, 27 Amperes, NEMA 4/4X Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SCW12)	1,426.41	146.90
			For Factory Installed Accessory, Deduct	*-293.79*	
26 29 13 13-0151		EA	Size 1, 3 Phase, 4 Pole, 7-1/2 HP At 200/230 Volt, 10 HP At 460/575 Volt, 27 Amperes, NEMA 4/4X Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SCW13)	1,654.44	197.75
			For Factory Installed Accessory, Deduct	*-395.49*	
26 29 13 13-0152		EA	Size 2, 3 Phase, 3 Pole, 10 HP At 200 Volt, 15 HP At 230 Volt, 25 HP At 460/575 Volt, 45 Amperes, NEMA 4/4X Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SDW12)	2,598.74	169.50
			For Factory Installed Accessory, Deduct	*-339.00*	
26 29 13 13-0153		EA	Size 3, 3 Phase, 3 Pole, 25 HP At 200 Volt, 30 HP At 230 Volt, 50 HP At 460/575 Volt, 90 Amperes, NEMA 4/4X Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SEW12)	3,931.14	225.99
			For Factory Installed Accessory, Deduct	*-452.00*	
26 29 13 13-0154		EA	Size 4, 3 Phase, 3 Pole, 40 HP At 200 Volt, 50 HP At 230 Volt, 100 HP At 460/575 Volt, 135 Amperes, NEMA 4/4X Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SFW12)	7,819.74	339.00
			For Factory Installed Accessory, Deduct	*-677.99*	
26 29 13 13-0155		EA	Size 5, 3 Phase, 3 Pole, 75 HP At 200 Volt, 100 HP At 230 Volt, 200 HP At 460/575 Volt, 270 Amperes, NEMA 4/4X Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SGW12)	13,740.68	452.00
			For Factory Installed Accessory, Deduct	*-903.99*	
26 29 13 13-0156		EA	Size 6, 3 Phase, 3 Pole, 150 HP At 200 Volt, 200 HP At 230 Volt, 400 HP At 460/575 Volt, 540 Amperes, NEMA 4/4X Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SHW2)	36,830.72	677.99
			For Factory Installed Accessory, Deduct	*-1,355.99*	
26 29 13 13-0157			NEMA 7/9, Non-Reversing, Magnetic Contactors *(26 29 13 13-0084)*		
			Note: Bolted cast iron enclosure.		
26 29 13 13-0158		EA	Size 0, 3 Phase, 3 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 18 Amperes, NEMA 7/9 Enclosure, Non-Reversing, Magnetic Contactors (Square D 8502SBT2)	2,635.61	180.80
			For Factory Installed Accessory, Deduct	*-361.59*	
26 29 13 13-0159			Non-Reversing, Magnetic Starters *(26 29 13 13-0083)*		
26 29 13 13-0160			Open Enclosure, Non-Reversing, Magnetic Starters *(26 29 13 13-0159)*		
26 29 13 13-0161		EA	Size 00, 1 Phase, 2 Pole, 3/4 HP At 115 Volt, 1 HP At 230 Volt, 9 Amperes, Open Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SAO11)	650.03	113.00
			For Factory Installed Accessory, Deduct	*-225.99*	
26 29 13 13-0162		EA	Size 00, 3 Phase, 3 Pole, 1-1/2 HP At 200/230 Volt, 2 HP At 460/575 Volt, 9 Amperes, Open Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SAO12)	672.64	124.30
			For Factory Installed Accessory, Deduct	*-248.60*	
26 29 13 13-0163		EA	Size 0, 1 Phase, 2 Pole, 1 HP At 115 Volt, 2 HP At 230 Volt, 18 Amperes, Open Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SBO1)	726.47	124.30
			For Factory Installed Accessory, Deduct	*-248.60*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 29 13 13-0164	EA	Size 0, 3 Phase, 3 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 18 Amperes, Open Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SBO2)	804.00	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0165	EA	Size 0, 3 Phase, 5 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 18 Amperes, Open Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SBO4)	1,295.54	203.40
		For Factory Installed Accessory, Deduct	*-406.80*	
26 29 13 13-0166	EA	Size 1, 1 Phase, 2 Pole, 2 HP At 115 Volt, 3 HP At 230 Volt, 27 Amperes, Open Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SCO1)	828.17	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0167	EA	Size 1, 3 Phase, 3 Pole, 7-1/2 HP At 200/230 Volt, 10 HP At 460/575 Volt, 27 Amperes, Open Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SCO3)	974.90	146.90
		For Factory Installed Accessory, Deduct	*-293.79*	
26 29 13 13-0168	EA	Size 1, 1 Phase, 2 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 36 Amperes, Open Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SCO2)	1,021.04	146.90
		For Factory Installed Accessory, Deduct	*-293.79*	
26 29 13 13-0169	EA	Size 2, 1 Phase, 2 Pole, 3 HP At 115 Volt, 7-1/2 HP At 230 Volt, 45 Amperes, Open Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SDO6)	1,279.68	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0170	EA	Size 2, 3 Phase, 3 Pole, 10 HP At 200 Volt, 15 HP At 230 Volt, 25 HP At 460/575 Volt, 45 Amperes, Open Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SDO1)	1,449.65	169.50
		For Factory Installed Accessory, Deduct	*-339.00*	
26 29 13 13-0171	EA	Size 3, 3 Phase, 3 Pole, 25 HP At 200 Volt, 30 HP At 230 Volt, 50 HP At 460/575 Volt, 90 Amperes, Open Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SEO1)	2,251.44	225.99
		For Factory Installed Accessory, Deduct	*-452.00*	
26 29 13 13-0172	EA	Size 4, 3 Phase, 3 Pole, 40 HP At 200 Volt, 50 HP At 230 Volt, 100 HP At 460/575 Volt, 135 Amperes, Open Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SFO1)	4,794.30	339.00
		For Factory Installed Accessory, Deduct	*-677.99*	
26 29 13 13-0173	EA	Size 5, 3 Phase, 3 Pole, 75 HP At 200 Volt, 100 HP At 230 Volt, 200 HP At 460/575 Volt, 270 Amperes, Open Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SGO1)	10,958.02	452.00
		For Factory Installed Accessory, Deduct	*-903.99*	
26 29 13 13-0174	EA	Size 6, 3 Phase, 3 Pole, 150 HP At 200 Volt, 200 HP At 230 Volt, 400 HP At 460/575 Volt, 540 Amperes, Open Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SHO2)	25,256.28	677.99
		For Factory Installed Accessory, Deduct	*-1,355.99*	
26 29 13 13-0175	EA	Size 7, 3 Phase, 3 Pole, 300 HP At 230 Volt, 600 HP At 460/575 Volt, 810 Amperes, Open Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SJO2)	36,375.00	1,016.99
		For Factory Installed Accessory, Deduct	*-2,033.98*	
26 29 13 13-0176		**NEMA 1, Non-Reversing, Magnetic Starters** *(26 29 13 13-0159)*		
26 29 13 13-0177	EA	Size 00, 1 Phase, 2 Pole, .34 HP At 115 Volt, 1 HP At 230 Volt, 9 Amperes, NEMA 1 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SAG11)	686.29	113.00
		For Factory Installed Accessory, Deduct	*-225.99*	
26 29 13 13-0178	EA	Size 00, 3 Phase, 3 Pole, 1-1/2 HP At 200/230 Volt, 2 HP At 460/575 Volt, 9 Amperes, NEMA 1 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SAG12)	708.90	124.30
		For Factory Installed Accessory, Deduct	*-248.60*	
26 29 13 13-0179	EA	Size 0, 1 Phase, 2 Pole, 1 HP At 115 Volt, 2 HP At 230 Volt, 18 Amperes, NEMA 1 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SBG1)	762.73	124.30
		For Factory Installed Accessory, Deduct	*-248.60*	
26 29 13 13-0180	EA	Size 0, 3 Phase, 3 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 18 Amperes, NEMA 1 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SBG2)	840.25	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0181	EA	Size 1, 1 Phase, 2 Pole, 2 HP At 115 Volt, 3 HP At 230 Volt, 27 Amperes, NEMA 1 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SCG1)	863.32	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0182	EA	Size 1, 3 Phase, 3 Pole, 7-1/2 HP At 200/230 Volt, 10 HP At 460/575 Volt, 27 Amperes, NEMA 1 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SCG3)	941.94	146.90
		For Factory Installed Accessory, Deduct	*-293.79*	
26 29 13 13-0183	EA	Size 1, 1 Phase, 2 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 36 Amperes, NEMA 1 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SCG2)	1,058.39	146.90
		For Factory Installed Accessory, Deduct	*-293.79*	
26 29 13 13-0184	EA	Size 2, 1 Phase, 2 Pole, 3 HP At 115 Volt, 7-1/2 HP At 230 Volt, 45 Amperes, NEMA 1 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SDG6)	1,443.36	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0185	EA	Size 2, 3 Phase, 3 Pole, 10 HP At 200 Volt, 15 HP At 230 Volt, 25 HP At 460/575 Volt, 45 Amperes, NEMA 1 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SDG1)	1,613.33	169.50
		For Factory Installed Accessory, Deduct	*-339.00*	
26 29 13 13-0186	EA	Size 3, 3 Phase, 3 Pole, 25 HP At 200 Volt, 30 HP At 230 Volt, 50 HP At 460/575 Volt, 90 Amperes, NEMA 1 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SEG1)	2,571.12	225.99
		For Factory Installed Accessory, Deduct	*-452.00*	
26 29 13 13-0187	EA	Size 4, 3 Phase, 3 Pole, 40 HP At 200 Volt, 50 HP At 230 Volt, 100 HP At 460/575 Volt, 135 Amperes, NEMA 1 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SFG1)	5,456.73	339.00
		For Factory Installed Accessory, Deduct	*-677.99*	
26 29 13 13-0188	EA	Size 5, 3 Phase, 3 Pole, 75 HP At 200 Volt, 100 HP At 230 Volt, 200 HP At 460/575 Volt, 270 Amperes, NEMA 1 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SGG1)	12,168.63	452.00
		For Factory Installed Accessory, Deduct	*-903.99*	
26 29 13 13-0189		**NEMA 12, Non-Reversing, Magnetic Starters** *(26 29 13 13-0159)*		
26 29 13 13-0190	EA	Size 0, 1 Phase, 2 Pole, 1 HP At 115 Volt, 2 HP At 230 Volt, 18 Amperes, NEMA 12 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SBA1)	950.58	124.30
		For Factory Installed Accessory, Deduct	*-248.60*	
26 29 13 13-0191	EA	Size 0, 3 Phase, 3 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 18 Amperes, NEMA 12 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SBA2)	1,028.11	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 29 13 13-0192	EA	Size 1, 1 Phase, 2 Pole, 2 HP At 115 Volt, 3 HP At 230 Volt, 27 Amperes, NEMA 12 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SCA1)	1,051.18	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0193	EA	Size 1, 3 Phase, 3 Pole, 7-1/2 HP At 200/230 Volt, 10 HP At 460/575 Volt, 27 Amperes, NEMA 12 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SCA3)	1,129.79	146.90
		For Factory Installed Accessory, Deduct	*-293.79*	
26 29 13 13-0194	EA	Size 1, 1 Phase, 2 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 36 Amperes, NEMA 12 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SCA2)	1,246.24	146.90
		For Factory Installed Accessory, Deduct	*-293.79*	
26 29 13 13-0195	EA	Size 2, 1 Phase, 2 Pole, 3 HP At 115 Volt, 7-1/2 HP At 230 Volt, 45 Amperes, NEMA 12 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SDA6)	1,787.21	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0196	EA	Size 2, 3 Phase, 3 Pole, 10 HP At 200 Volt, 15 HP At 230 Volt, 25 HP At 460/575 Volt, 45 Amperes, NEMA 12 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SDA1)	1,956.08	169.50
		For Factory Installed Accessory, Deduct	*-339.00*	
26 29 13 13-0197	EA	Size 3, 3 Phase, 3 Pole, 25 HP At 200 Volt, 30 HP At 230 Volt, 50 HP At 460/575 Volt, 90 Amperes, NEMA 12 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SEA1)	2,976.49	225.99
		For Factory Installed Accessory, Deduct	*-452.00*	
26 29 13 13-0198	EA	Size 4, 3 Phase, 3 Pole, 40 HP At 200 Volt, 50 HP At 230 Volt, 100 HP At 460/575 Volt, 135 Amperes, NEMA 12 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SFA1)	6,801.37	339.00
		For Factory Installed Accessory, Deduct	*-677.99*	
26 29 13 13-0199	EA	Size 5, 3 Phase, 3 Pole, 75 HP At 200 Volt, 100 HP At 230 Volt, 200 HP At 460/575 Volt, 270 Amperes, NEMA 12 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SGA1)	15,609.33	452.00
		For Factory Installed Accessory, Deduct	*-903.99*	
26 29 13 13-0200	EA	Size 6, 3 Phase, 3 Pole, 150 HP At 200 Volt, 200 HP At 230 Volt, 400 HP At 460/575 Volt, 540 Amperes, NEMA 12 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SHA2)	37,308.60	677.99
		For Factory Installed Accessory, Deduct	*-1,355.99*	

26 29 13 13-0201 NEMA 3R, Non-Reversing, Magnetic Starters *(26 29 13 13-0159)*

26 29 13 13-0202	EA	Size 0, 1 Phase, 2 Pole, 1 HP At 115 Volt, 2 HP At 230 Volt, 18 Amperes, NEMA 3R Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SBH1)	950.58	124.30
		For Factory Installed Accessory, Deduct	*-248.60*	
26 29 13 13-0203	EA	Size 0, 3 Phase, 3 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 18 Amperes, NEMA 3R Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SBH2)	1,028.11	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0204	EA	Size 1, 1 Phase, 2 Pole, 2 HP At 115 Volt, 3 HP At 230 Volt, 27 Amperes, NEMA 3R Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SCH1)	1,051.18	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0205	EA	Size 1, 3 Phase, 3 Pole, 7-1/2 HP At 200/230 Volt, 10 HP At 460/575 Volt, 27 Amperes, NEMA 3R Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SCH3)	1,129.79	146.90
		For Factory Installed Accessory, Deduct	*-293.79*	
26 29 13 13-0206	EA	Size 1, 1 Phase, 2 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 36 Amperes, NEMA 3R Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SCH2)	1,246.24	146.90
		For Factory Installed Accessory, Deduct	*-293.79*	
26 29 13 13-0207	EA	Size 2, 1 Phase, 2 Pole, 3 HP At 115 Volt, 7-1/2 HP At 230 Volt, 45 Amperes, NEMA 3R Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SDH6)	1,787.21	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0208	EA	Size 2, 3 Phase, 3 Pole, 10 HP At 200 Volt, 15 HP At 230 Volt, 25 HP At 460/575 Volt, 45 Amperes, NEMA 3R Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SDH1)	1,956.08	169.50
		For Factory Installed Accessory, Deduct	*-339.00*	
26 29 13 13-0209	EA	Size 3, 3 Phase, 3 Pole, 25 HP At 200 Volt, 30 HP At 230 Volt, 50 HP At 460/575 Volt, 90 Amperes, NEMA 3R Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SEH1)	2,976.49	225.99
		For Factory Installed Accessory, Deduct	*-452.00*	
26 29 13 13-0210	EA	Size 4, 3 Phase, 3 Pole, 40 HP At 200 Volt, 50 HP At 230 Volt, 100 HP At 460/575 Volt, 135 Amperes, NEMA 3R Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SFH1)	6,801.37	339.00
		For Factory Installed Accessory, Deduct	*-677.99*	

26 29 13 13-0211 NEMA 3R/4/4X/7/9, Non-Reversing, Magnetic Starters *(26 29 13 13-0159)*

Note: Bolted cast aluminum enclosure.

26 29 13 13-0212	EA	Size 0, 3 Phase, 3 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 18 Amperes, NEMA 3R/4/4X/7/9 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SBT4)	2,746.11	192.09
		For Factory Installed Accessory, Deduct	*-384.20*	
26 29 13 13-0213	EA	Size 1, 1 Phase, 2 Pole, 2 HP At 115 Volt, 3 HP At 230 Volt, 27 Amperes, NEMA 3R/4/4X/7/9 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SCR1)	3,385.47	192.09
		For Factory Installed Accessory, Deduct	*-384.20*	
26 29 13 13-0214	EA	Size 1, 3 Phase, 3 Pole, 7-1/2 HP At 200/230 Volt, 10 HP At 460/575 Volt, 27 Amperes, NEMA 3R/4/4X/7/9 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SCR3)	3,487.16	203.40
		For Factory Installed Accessory, Deduct	*-406.80*	
26 29 13 13-0215	EA	Size 2, 3 Phase, 3 Pole, 10 HP At 200 Volt, 15 HP At 230 Volt, 25 HP At 460/575 Volt, 45 Amperes, NEMA 3R/4/4X/7/9 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SDR1)	5,425.19	225.99
		For Factory Installed Accessory, Deduct	*-452.00*	
26 29 13 13-0216	EA	Size 3, 3 Phase, 3 Pole, 25 HP At 200 Volt, 30 HP At 230 Volt, 50 HP At 460/575 Volt, 90 Amperes, NEMA 3R/4/4X/7/9 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SET43)	6,540.06	282.50
		For Factory Installed Accessory, Deduct	*-564.99*	
26 29 13 13-0217	EA	Size 4, 3 Phase, 3 Pole, 40 HP At 200 Volt, 50 HP At 230 Volt, 100 HP At 460/575 Volt, 135 Amperes, NEMA 3R/4/4X/7/9 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SFT41)	10,434.17	395.49
		For Factory Installed Accessory, Deduct	*-791.00*	

26 29 13 13-0218 NEMA 4/4X, Non-Reversing, Magnetic Starters *(26 29 13 13-0159)*

Note: Brushed stainless steel enclosure.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 29 13 13-0219	EA	Size 0, 1 Phase, 2 Pole, 1 HP At 115 Volt, 2 HP At 230 Volt, 18 Amperes, NEMA 4/4X Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SBW11)	1,309.81	124.30
		For Factory Installed Accessory, Deduct	*-248.60*	
26 29 13 13-0220	EA	Size 0, 3 Phase, 3 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 18 Amperes, NEMA 4/4X Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SBW12)	1,388.44	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0221	EA	Size 1, 1 Phase, 2 Pole, 2 HP At 115 Volt, 3 HP At 230 Volt, 27 Amperes, NEMA 4/4X Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SCW11)	1,426.89	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0222	EA	Size 1, 3 Phase, 3 Pole, 7-1/2 HP At 200/230 Volt, 10 HP At 460/575 Volt, 27 Amperes, NEMA 4/4X Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SCW13)	1,505.50	146.90
		For Factory Installed Accessory, Deduct	*-293.79*	
26 29 13 13-0223	EA	Size 1, 1 Phase, 2 Pole, 3 HP At 200/230 Volt, 7-1/2 HP At 460/575 Volt, 36 Amperes, NEMA 4/4X Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SCW12)	1,621.95	146.90
		For Factory Installed Accessory, Deduct	*-293.79*	
26 29 13 13-0224	EA	Size 2, 1 Phase, 2 Pole, 3 HP At 115 Volt, 7-1/2 HP At 230 Volt, 45 Amperes, NEMA 4/4X Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SDW16)	2,568.29	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0225	EA	Size 3, 3 Phase, 3 Pole, 25 HP At 200 Volt, 30 HP At 230 Volt, 50 HP At 460/575 Volt, 90 Amperes, NEMA 4/4X Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SEW11)	4,165.14	225.99
		For Factory Installed Accessory, Deduct	*-452.00*	
26 29 13 13-0226	EA	Size 4, 3 Phase, 3 Pole, 40 HP At 200 Volt, 50 HP At 230 Volt, 100 HP At 460/575 Volt, 135 Amperes, NEMA 4/4X Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SFW11)	8,177.87	339.00
		For Factory Installed Accessory, Deduct	*-677.99*	
26 29 13 13-0227	EA	Size 5, 3 Phase, 3 Pole, 75 HP At 200 Volt, 100 HP At 230 Volt, 200 HP At 460/575 Volt, 270 Amperes, NEMA 4/4X Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SGW11)	18,255.76	452.00
		For Factory Installed Accessory, Deduct	*-903.99*	

26 29 13 13-0228 NEMA 4X, Non-Reversing, Magnetic Starters *(26 29 13 13-0159)*

Note: Glass polyester enclosure.

26 29 13 13-0229	EA	Size 2, 3 Phase, 3 Pole, 10 HP At 200 Volt, 15 HP At 230 Volt, 25 HP At 460/575 Volt, 45 Amperes, NEMA 4X Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SDW21)	2,740.45	169.50
		For Factory Installed Accessory, Deduct	*-339.00*	
26 29 13 13-0230	EA	Size 3, 3 Phase, 3 Pole, 25 HP At 200 Volt, 30 HP At 230 Volt, 50 HP At 460/575 Volt, 90 Amperes, NEMA 4X Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SEW21)	5,094.52	225.99
		For Factory Installed Accessory, Deduct	*-452.00*	
26 29 13 13-0231	EA	Size 4, 3 Phase, 3 Pole, 40 HP At 200 Volt, 50 HP At 230 Volt, 100 HP At 460/575 Volt, 135 Amperes, NEMA 4X Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SFW21)	10,054.21	339.00
		For Factory Installed Accessory, Deduct	*-677.99*	

26 29 13 13-0232 NEMA 7/9, Non-Reversing, Magnetic Starters *(26 29 13 13-0159)*

Note: Bolted cast iron enclosure.

26 29 13 13-0233	EA	Size 0, 1 Phase, 2 Pole, 1 HP At 115 Volt, 2 HP At 230 Volt, 18 Amperes, NEMA 7/9 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SBT1)	2,658.68	180.80
		For Factory Installed Accessory, Deduct	*-361.59*	
26 29 13 13-0234	EA	Size 0, 3 Phase, 3 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 18 Amperes, NEMA 7/9 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SBT2)	2,746.11	192.09
		For Factory Installed Accessory, Deduct	*-384.20*	
26 29 13 13-0235	EA	Size 1, 1 Phase, 2 Pole, 2 HP At 115 Volt, 3 HP At 230 Volt, 27 Amperes, NEMA 7/9 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SCT1)	2,785.65	192.09
		For Factory Installed Accessory, Deduct	*-384.20*	
26 29 13 13-0236	EA	Size 1, 3 Phase, 3 Pole, 7-1/2 HP At 200/230 Volt, 10 HP At 460/575 Volt, 27 Amperes, NEMA 7/9 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SCT3)	2,868.68	203.40
		For Factory Installed Accessory, Deduct	*-406.80*	
26 29 13 13-0237	EA	Size 1, 1 Phase, 2 Pole, 2 HP At 115 Volt, 3 HP At 230 Volt, 36 Amperes, NEMA 7/9 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SCT2)	3,002.70	203.40
		For Factory Installed Accessory, Deduct	*-406.80*	
26 29 13 13-0238	EA	Size 2, 3 Phase, 3 Pole, 10 HP At 200 Volt, 15 HP At 230 Volt, 25 HP At 460/575 Volt, 45 Amperes, NEMA 7/9 Enclosure, Full Voltage, Non-Reversing Magnetic Starter (Square D 8536SDT1)	4,432.09	225.99
		For Factory Installed Accessory, Deduct	*-452.00*	

26 29 13 13-0239 Reversing, Magnetic Starters *(26 29 13 13-0083)*

26 29 13 13-0240 Open Enclosure, Reversing, Magnetic Starters *(26 29 13 13-0239)*

26 29 13 13-0241	EA	Size 00, 1 Phase, 3 Pole, 3/4 HP At 115 Volt, 1 HP At 230 Volt, 9 Amperes, Open Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SAO13)	1,241.85	146.90
		For Factory Installed Accessory, Deduct	*-293.79*	
26 29 13 13-0242	EA	Size 00, 3 Phase, 3 Pole, 1-1/2 HP At 200/230 Volt, 2 HP At 460/575 Volt, 9 Amperes, Open Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SAO16)	1,311.06	146.90
		For Factory Installed Accessory, Deduct	*-293.79*	
26 29 13 13-0243	EA	Size 0, 1 Phase, 2 Pole, 1 HP At 115 Volt, 2 HP At 230 Volt, 18 Amperes, Open Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SBO1)	1,452.31	158.20
		For Factory Installed Accessory, Deduct	*-316.40*	
26 29 13 13-0244	EA	Size 0, 1 Phase, 3 Pole, 1 HP At 115 Volt, 2 HP At 230 Volt, 18 Amperes, Open Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SBO2)	1,505.67	169.50
		For Factory Installed Accessory, Deduct	*-339.00*	
26 29 13 13-0245	EA	Size 0, 3 Phase, 3 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 18 Amperes, Open Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SBO10)	1,544.12	169.50
		For Factory Installed Accessory, Deduct	*-339.00*	
26 29 13 13-0246	EA	Size 1, 1 Phase, 2 Pole, 2 HP At 115 Volt, 3 HP At 230 Volt, 27 Amperes, Open Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SCO2)	1,652.40	180.80
		For Factory Installed Accessory, Deduct	*-361.59*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 29 13 13-0247	EA	Size 1, 1 Phase, 3 Pole, 2 HP At 115 Volt, 3 HP At 230 Volt, 27 Amperes, Open Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SCO3)	1,719.26	197.75
		For Factory Installed Accessory, Deduct	*-395.49*	
26 29 13 13-0248	EA	Size 1, 3 Phase, 3 Pole, 7-1/2 HP At 200/230 Volt, 10 HP At 460/575 Volt, 27 Amperes, Open Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SCO7)	1,758.80	197.75
		For Factory Installed Accessory, Deduct	*-395.49*	
26 29 13 13-0249	EA	Size 2, 3 Phase, 3 Pole, 10 HP At 200 Volt, 15 HP At 230 Volt, 25 HP At 460/575 Volt, 45 Amperes, Open Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SDO1)	3,032.52	225.99
		For Factory Installed Accessory, Deduct	*-452.00*	
26 29 13 13-0250	EA	Size 3, 3 Phase, 3 Pole, 25 HP At 200 Volt, 30 HP At 230 Volt, 50 HP At 460/575 Volt, 90 Amperes, Open Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SEO1)	4,964.57	339.00
		For Factory Installed Accessory, Deduct	*-677.99*	
26 29 13 13-0251	EA	Size 4, 3 Phase, 3 Pole, 40 HP At 200 Volt, 50 HP At 230, 100 HP At 460/575 Volt, 135 Amperes, Open Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SFO1)	11,486.28	508.50
		For Factory Installed Accessory, Deduct	*-1,016.99*	
26 29 13 13-0252	EA	Size 5, 3 Phase, 3 Pole, 75 HP At 200 Volt, 100 HP At 230 Volt, 200 HP At 460/575 Volt, 270 Amperes, Open Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SGO1)	21,469.54	677.99
		For Factory Installed Accessory, Deduct	*-1,355.99*	
26 29 13 13-0253	EA	Size 7, 3 Phase, 3 Pole, 300 HP At 230 Volt, 600 HP At 460/575 Volt, 810 Amperes, Open Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SJO1)	69,772.84	1,242.98
		For Factory Installed Accessory, Deduct	*-2,485.98*	

26 29 13 13-0254 NEMA 1, Reversing, Magnetic Starters *(26 29 13 13-0239)*

26 29 13 13-0255	EA	Size 00, 1 Phase, 2 Pole, 3/4 HP At 115 Volt, 1 HP At 230 Volt, 9 Amperes, NEMA 1 Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SAG13)	1,285.17	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0256	EA	Size 00, 1 Phase, 3 Pole, 3/4 HP At 115 Volt, 1 HP At 230 Volt, 9 Amperes, NEMA 1 Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SAG15)	1,340.72	146.90
		For Factory Installed Accessory, Deduct	*-293.79*	
26 29 13 13-0257	EA	Size 00, 3 Phase, 3 Pole, 1-1/2 HP At 200/230 Volt, 2 HP At 460/575 Volt, 9 Amperes, NEMA 1 Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SAG16)	1,380.27	146.90
		For Factory Installed Accessory, Deduct	*-293.79*	
26 29 13 13-0258	EA	Size 0, 1 Phase, 2 Pole, 1 HP At 115 Volt, 2 HP At 230 Volt, 18 Amperes, NEMA 1 Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SBG1)	1,518.23	158.20
		For Factory Installed Accessory, Deduct	*-316.40*	
26 29 13 13-0259	EA	Size 0, 1 Phase, 3 Pole, 1 HP At 115 Volt, 2 HP At 230 Volt, 18 Amperes, NEMA 1 Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SBG2)	1,573.78	169.50
		For Factory Installed Accessory, Deduct	*-339.00*	
26 29 13 13-0260	EA	Size 0, 3 Phase, 3 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 18 Amperes, NEMA 1 Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SBG4)	1,613.33	169.50
		For Factory Installed Accessory, Deduct	*-339.00*	
26 29 13 13-0261	EA	Size 1, 1 Phase, 2 Pole, 2 HP At 115 Volt, 3 HP At 230 Volt, 27 Amperes, NEMA 1 Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SCG2)	1,751.27	180.80
		For Factory Installed Accessory, Deduct	*-361.59*	
26 29 13 13-0262	EA	Size 1, 1 Phase, 3 Pole, 2 HP At 115 Volt, 3 HP At 230 Volt, 27 Amperes, NEMA 1 Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SCG6)	1,818.13	197.75
		For Factory Installed Accessory, Deduct	*-395.49*	
26 29 13 13-0263	EA	Size 1, 3 Phase, 3 Pole, 7-1/2 HP At 200/230 Volt, 10 HP At 460/575 Volt, 27 Amperes, NEMA 1 Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SCG8)	1,857.67	197.75
		For Factory Installed Accessory, Deduct	*-395.49*	
26 29 13 13-0264	EA	Size 2, 3 Phase, 3 Pole, 10 HP At 200 Volt, 15 HP At 230 Volt, 25 HP At 460/575 Volt, 45 Amperes, NEMA 1 Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SDG2)	3,289.58	225.99
		For Factory Installed Accessory, Deduct	*-452.00*	
26 29 13 13-0265	EA	Size 3, 3 Phase, 3 Pole, 25 HP At 200 Volt, 30 HP At 230 Volt, 50 HP At 460/575 Volt, 90 Amperes, NEMA 1 Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SEG2)	5,409.49	339.00
		For Factory Installed Accessory, Deduct	*-677.99*	
26 29 13 13-0266	EA	Size 4, 3 Phase, 3 Pole, 40 HP At 200 Volt, 50 HP At 230 Volt, 100 HP At 460/575 Volt, 135 Amperes, NEMA 1 Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SFG3)	12,303.61	508.50
		For Factory Installed Accessory, Deduct	*-1,016.99*	

26 29 13 13-0267 NEMA 12, Reversing, Magnetic Starters *(26 29 13 13-0239)*

26 29 13 13-0268	EA	Size 0, 1 Phase, 3 Pole, 3/4 HP At 115 Volt, 1 HP At 230 Volt, 18 Amperes, NEMA 12 Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SBA2)	1,855.01	169.50
		For Factory Installed Accessory, Deduct	*-339.00*	
26 29 13 13-0269	EA	Size 0, 3 Phase, 3 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 18 Amperes, NEMA 12 Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SBA4)	1,894.56	169.50
		For Factory Installed Accessory, Deduct	*-339.00*	
26 29 13 13-0270	EA	Size 1, 3 Phase, 3 Pole, 7-1/2 HP At 200/230 Volt, 10 HP At 460/575 Volt, 27 Amperes, NEMA 12 Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SCA4)	2,138.91	197.75
		For Factory Installed Accessory, Deduct	*-395.49*	
26 29 13 13-0271	EA	Size 2, 3 Phase, 3 Pole, 10 HP At 200 Volt, 15 HP At 230 Volt, 25 HP At 460/575 Volt, 45 Amperes, NEMA 12 Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SDA1)	3,759.77	225.99
		For Factory Installed Accessory, Deduct	*-452.00*	

26 29 13 13-0272 NEMA 4X, Reversing, Magnetic Starters *(26 29 13 13-0239)*

Note: Brushed stainless steel enclosure.

26 29 13 13-0273	EA	Size 0, 3 Phase, 3 Pole, 3 HP At 200/230 Volt, 5 HP At 460/575 Volt, 18 Amperes, NEMA 4/4X Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SBW14)	2,331.79	169.50
		For Factory Installed Accessory, Deduct	*-339.00*	
26 29 13 13-0274	EA	Size 1, 1 Phase, 2 Pole, 2 HP At 115 Volt, 3 HP At 230 Volt, 27 Amperes, NEMA 4/4X Enclosure, Full Voltage, Reversing Magnetic Starter (Square D 8736SCW11)	2,753.16	180.80
		For Factory Installed Accessory, Deduct	*-361.59*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 29 13 13-0275		**Magnetic Contactor/Starters Accessories** *(26 29 13 13-0083)*		
26 29 13 13-0276	EA	NEMA 1 Enclosure Start/Stop Push Button Kit, Contactor/Starter Accessory (Square D 9999SA2)	173.57	14.13
		For Factory Installed Accessory, Deduct	*-28.25*	
26 29 13 13-0277	EA	NEMA 12 Enclosure Start/Stop Push Button Kit, Contactor/Starter Accessory (Square D 9999SA3)	297.59	14.13
		For Factory Installed Accessory, Deduct	*-28.25*	
26 29 13 13-0278	EA	NEMA 1 Enclosure Selector Switch Kit, Contactor/Starter Accessory (Square D 9999SC2)	173.57	14.13
		For Factory Installed Accessory, Deduct	*-28.25*	
26 29 13 13-0279	EA	NEMA 12 Enclosure Selector Switch Kit, Contactor/Starter Accessory (Square D 9999SC8)	297.59	14.13
		For Factory Installed Accessory, Deduct	*-28.25*	
26 29 13 13-0280	EA	NEMA 1 And 12 Enclosure Red Pilot Light Kit, Contactor/Starter Accessory (Square D 9999SP2R)	297.59	14.13
		For Factory Installed Accessory, Deduct	*-28.25*	
26 29 13 13-0281	EA	Internal Non-Convertible Contact Block Kit, 1 Contact, Contactor/Starter Accessory (Square D 9999SX11)	146.62	11.30
		For Factory Installed Accessory, Deduct	*-22.60*	
26 29 13 13-0282	EA	External Convertible Field Contact, 1 Contact, Contactor/Starter Accessory (Square D 9999SX6)	130.34	11.30
		For Factory Installed Accessory, Deduct	*-22.60*	
26 29 13 13-0283	EA	External Convertible Field Contacts, 2 Contacts Or 1 Overlapping Contact, Contactor/Starter Accessory (Square D 9999SX8)	173.57	14.13
		For Factory Installed Accessory, Deduct	*-28.25*	
26 29 13 13-0284	EA	External Field Non-Convertible Contact, 1 Contact, Contactor/Starter Accessory (Square D 9999SX13)	146.62	11.30
		For Factory Installed Accessory, Deduct	*-22.60*	
26 29 13 13-0285	EA	External Field Non-Convertible Contacts, 2 Contacts Or 1 Overlapping Contact, Contactor/Starter Accessory (Square D 9999SX15)	196.12	14.13
		For Factory Installed Accessory, Deduct	*-28.25*	
26 29 13 13-0286	EA	30 Amperes, 1 Contact Power Pole Adder Kit, Contactor/Starter Accessory (Square D 9999SB6)	220.53	11.30
		For Factory Installed Accessory, Deduct	*-22.60*	
26 29 13 13-0287	EA	45 Amperes, 1 Contact Power Pole Adder Kit, Contactor/Starter Accessory (Square D 9999SB11)	382.14	11.30
		For Factory Installed Accessory, Deduct	*-22.60*	
26 29 13 13-0288	EA	60 Amperes, 1 Contact Power Pole Adder Kit, Contactor/Starter Accessory (Square D 9999SB21)	405.94	11.30
		For Factory Installed Accessory, Deduct	*-22.60*	
26 29 13 13-0289	EA	30 Amperes, 2 Contact Power Pole Adder Kit, Contactor/Starter Accessory (Square D 9999SB8)	485.50	14.13
		For Factory Installed Accessory, Deduct	*-28.25*	
26 29 13 13-0290	EA	45 Amperes, 2 Contact Power Pole Adder Kit, Contactor/Starter Accessory (Square D 9999SB13)	850.05	14.13
		For Factory Installed Accessory, Deduct	*-28.25*	
26 29 13 13-0291	EA	60 Amperes, 2 Contact Power Pole Adder Kit, Contactor/Starter Accessory (Square D 9999SB23)	850.05	14.13
		For Factory Installed Accessory, Deduct	*-28.25*	
26 29 13 13-0292	EA	Adapter Bracket For Power Pole Adder Kit, Contactor/Starter Accessory (Square D 9999SBT1)	49.66	8.48
		For Factory Installed Accessory, Deduct	*-16.95*	
26 29 13 13-0293	EA	1 Pole Control Circuit Fuse Holder, Contactor/Starter Accessory (Square D 9999SF3)	102.78	11.30
		For Factory Installed Accessory, Deduct	*-22.60*	
26 29 13 13-0294	EA	2 Pole Control Circuit Fuse Holder, Contactor/Starter Accessory (Square D 9999SF4)	135.99	14.13
		For Factory Installed Accessory, Deduct	*-28.25*	
26 29 13 13-0295	EA	Transient Suppression Module, Contactor/Starter Accessory (Square D 9999ST1)	105.92	14.13
		For Factory Installed Accessory, Deduct	*-28.25*	
26 29 13 13-0296	EA	Terminal Block, Contactor/Starter Accessory (Square D 9999T7)	58.68	8.48
		For Factory Installed Accessory, Deduct	*-16.95*	
26 29 13 13-0297	EA	Closing Plate For NEMA 1 Enclosures, Contactor/Starter Accessory (Square D 9999SG1)	34.87	8.48
		For Factory Installed Accessory, Deduct	*-16.95*	
26 29 13 13-0298	EA	1 Pole Disconnect Switch And Breaker Interlock, Contactor/Starter Accessory (Square D 9999R39)	191.72	11.30
		For Factory Installed Accessory, Deduct	*-22.60*	
26 29 13 13-0299	EA	2 Pole Disconnect Switch And Breaker Interlock, Contactor/Starter Accessory (Square D 9999R40)	332.67	14.13
		For Factory Installed Accessory, Deduct	*-28.25*	
26 29 13 13-0300		**Definite Purpose Starters** *(26 29 13 13)*		
26 29 13 13-0301		**Open Enclosure, Definite Purpose Starter** *(26 29 13 13-0300)*		
26 29 13 13-0302	EA	Open Enclosure, 3 Phase, 3 Pole, 3 HP At 230 Volt, 5 HP At 460/575 Volt, 20 Amperes, Definite Purpose Starter With Thermal Overload Protection (Square D 8911DPSO13)	597.47	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0303	EA	Open Enclosure, 1 Phase, 2 Pole, 2 HP At 115 Volt, 3 HP At 230 Volt, 25 Amperes, Definite Purpose Starter With Thermal Overload Protection (Square D 8911DPSO22)	596.37	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0304	EA	Open Enclosure, 3 Phase, 3 Pole, 7.5 HP At 230 Volt, 10 HP At 460/575 Volt, 25 Amperes, Definite Purpose Starter With Thermal Overload Protection (Square D 8911DPSO23)	645.33	146.90
		For Factory Installed Accessory, Deduct	*-293.79*	
26 29 13 13-0305	EA	Open Enclosure, 1 Phase, 2 Pole, 2 HP At 115 Volt, 5 HP At 230 Volt, 30 Amperes, Definite Purpose Starter With Thermal Overload Protection (Square D 8911DPSO32)	637.02	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0306	EA	Open Enclosure, 3 Phase, 3 Pole, 10 HP At 230 Volt, 15 HP At 460/575 Volt, 30 Amperes, Definite Purpose Starter With Thermal Overload Protection (Square D 8911DPSO33)	692.57	146.90
		For Factory Installed Accessory, Deduct	*-293.79*	
26 29 13 13-0307	EA	Open Enclosure, 1 Phase, 2 Pole, 3 HP At 115 Volt, 7-1/2 HP At 230 Volt, 40 Amperes, Definite Purpose Starter With Thermal Overload Protection (Square D 8911DPSO42)	672.17	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0308	EA	Open Enclosure, 3 Phase, 3 Pole, 10 HP At 230 Volt, 20 HP At 460/575 Volt, 40 Amperes, Definite Purpose Starter With Thermal Overload Protection (Square D 8911DPSO43)	777.33	169.50
		For Factory Installed Accessory, Deduct	*-339.00*	
26 29 13 13-0309	EA	Open Enclosure, 1 Phase, 2 Pole, 3 HP At 115 Volt, 10 HP At 230 Volt, 50 Amperes, Definite Purpose Starter With Thermal Overload Protection (Square D 8911DPSO52)	868.51	169.50
		For Factory Installed Accessory, Deduct	*-339.00*	

copyright 2026 The Gordian Group, Inc.

CSI	MINOR UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 29 13 13-0310	EA	Open Enclosure, 3 Phase, 3 Pole, 15 HP At 230 Volt, 30 HP At 460/575 Volt, 50 Amperes, Definite Purpose Starter With Thermal Overload Protection (Square D 8911DPSO53)	1,096.37	197.75
		For Factory Installed Accessory, Deduct	*-395.49*	

26 29 13 13-0311 NEMA 1, Definite Purpose Starter *(26 29 13 13-0300)*

26 29 13 13-0312	EA	NEMA 1, 1 Phase, 2 Pole, 1 HP At 115 Volt, 2 HP At 230 Volt, 20 Amperes, Definite Purpose Starter With Thermal Overload Protection (Square D 8911DPSG12)	613.32	124.30
		For Factory Installed Accessory, Deduct	*-248.60*	
26 29 13 13-0313	EA	NEMA 1, 3 Phase, 3 Pole, 3 HP At 230 Volt, 5 HP At 460/575 Volt, 20 Amperes, Definite Purpose Starter With Thermal Overload Protection (Square D 8911DPSG13)	662.29	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0314	EA	NEMA 1, 1 Phase, 2 Pole, 2 HP At 115 Volt, 3 HP At 230 Volt, 25 Amperes, Definite Purpose Starter With Thermal Overload Protection (Square D 8911DPSG22)	660.09	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0315	EA	NEMA 1, 3 Phase, 3 Pole, 7.5 HP At 230 Volt, 10 HP At 460/575 Volt, 25 Amperes, Definite Purpose Starter With Thermal Overload Protection (Square D 8911DPSG23)	712.34	146.90
		For Factory Installed Accessory, Deduct	*-293.79*	
26 29 13 13-0316	EA	NEMA 1, 1 Phase, 2 Pole, 2 HP At 115 Volt, 5 HP At 230 Volt, 30 Amperes, Definite Purpose Starter With Thermal Overload Protection (Square D 8911DPSG32)	701.84	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0317	EA	NEMA 1, 3 Phase, 3 Pole, 10 HP At 230 Volt, 15 HP At 460/575 Volt, 30 Amperes, Definite Purpose Starter With Thermal Overload Protection (Square D 8911DPSG33)	758.48	146.90
		For Factory Installed Accessory, Deduct	*-293.79*	
26 29 13 13-0318	EA	NEMA 1, 1 Phase, 2 Pole, 3 HP At 115 Volt, 7-1/2 HP At 230 Volt, 40 Amperes, Definite Purpose Starter With Thermal Overload Protection (Square D 8911DPSG42)	739.19	135.60
		For Factory Installed Accessory, Deduct	*-271.20*	
26 29 13 13-0319	EA	NEMA 1, 3 Phase, 3 Pole, 10 HP At 230 Volt, 20 HP At 460/575 Volt, 40 Amperes, Definite Purpose Starter With Thermal Overload Protection (Square D 8911DPSG43)	843.24	169.50
		For Factory Installed Accessory, Deduct	*-339.00*	
26 29 13 13-0320	EA	NEMA 1, 1 Phase, 2 Pole, 3 HP At 115 Volt, 10 HP At 230 Volt, 50 Amperes, Definite Purpose Starter With Thermal Overload Protection (Square D 8911DPSG52)	931.12	169.50
		For Factory Installed Accessory, Deduct	*-339.00*	
26 29 13 13-0321	EA	NEMA 1, 3 Phase, 3 Pole, 15 HP At 230 Volt, 30 HP At 460/575 Volt, 50 Amperes, Definite Purpose Starter With Thermal Overload Protection (Square D 8911DPSG53)	1,160.09	197.75
		For Factory Installed Accessory, Deduct	*-395.49*	

26 29 13 13-0322 Definite Purpose Starter Accessory *(26 29 13 13-0300)*

26 29 13 13-0323	EA	Start-Stop Push Button Kit, Definite Purpose Starter Accessory Note: Or Hand-Off-Auto Selector Switch Kit	196.12	14.13
		For Factory Installed Accessory, Deduct	*-28.25*	

26 29 13 13-0324 Panel Mounted Miniature Contactor *(26 29 13 13)*

26 29 13 13-0325 Non-Reversing, Panel Mounted Miniature Contactor *(26 29 13 13-0324)*

26 29 13 13-0326	EA	3 Phase (1-1/2 HP At 200/230 Volt, 3 HP At 460/575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 3 Pole, Auxiliary Contacts, 6 Amperes, 15 Amperes, AC Coil, Non-Reversing, Panel Mounted Miniature Contactor (Square D LC1K)	175.62	56.50
26 29 13 13-0327	EA	3 Phase (2 HP At 200 Volt, 3 HP At 230 Volt, 5 HP At 460/575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 4 Pole, Without Auxiliary Contacts, 9 Amperes, 20 Amperes, AC Coil, Non-Reversing, Panel Mounted Miniature Contactor (Square D LC1K)	206.69	62.15
26 29 13 13-0328	EA	3 Phase (2 HP At 200 Volt, 3 HP At 230 Volt, 5 HP At 460/575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 3 Pole, Auxiliary Contacts, 9 Amperes, 20 Amperes, AC Coil, Non-Reversing, Panel Mounted Miniature Contactor (Square D LC1K)	206.69	62.15
26 29 13 13-0329	EA	3 Phase (3 HP At 200/230 Volt, 7-1/2 HP At 460 Volt, 10 HP At 575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 3 Pole, Auxiliary Contacts, 12 Amperes, 20 Amperes, AC Coil, Non-Reversing, Panel Mounted Miniature Contactor (Square D LC1K)	230.08	67.80
26 29 13 13-0330	EA	3 Phase (1-1/2 HP At 200/230 Volt, 3 HP At 460/575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 3 Pole, Auxiliary Contacts, 6 Amperes, 15 Amperes, DC Coil, Non-Reversing, Panel Mounted Miniature Contactor (Square D LP1K)	195.39	56.50
26 29 13 13-0331	EA	3 Phase (1-1/2 HP At 200/230 Volt, 3 HP At 460/575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 3 Pole, Auxiliary Contacts, 6 Amperes, 15 Amperes, DC Coil With Integral Suppression, Non-Reversing, Panel Mounted Miniature Contactor (Square D LP1K)	206.38	56.50
26 29 13 13-0332	EA	3 Phase (2 HP At 200 Volt, 3 HP At 230 Volt, 5 HP At 460/575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 3 Pole, Auxiliary Contacts, 9 Amperes, 20 Amperes, DC Coil, Non-Reversing, Panel Mounted Miniature Contactor (Square D LP1K)	225.37	62.15
26 29 13 13-0333	EA	3 Phase (2 HP At 200 Volt, 3 HP At 230 Volt, 5 HP At 460/575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 3 Pole, Auxiliary Contacts, 9 Amperes, 20 Amperes, DC Coil With Integral Suppression, Non-Reversing, Panel Mounted Miniature Contactor (Square D LP1K)	236.35	62.15
26 29 13 13-0334	EA	3 Phase (2 HP At 200 Volt, 3 HP At 230 Volt, 5 HP At 460/575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 4 Pole, Without Auxiliary Contacts, 9 Amperes, 20 Amperes, DC Coil, Non-Reversing, Panel Mounted Miniature Contactor (Square D LP1K)	231.96	62.15
26 29 13 13-0335	EA	3 Phase (2 HP At 200 Volt, 3 HP At 230 Volt, 5 HP At 460/575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 4 Pole, Without Auxiliary Contacts, 9 Amperes, 20 Amperes, DC Coil With Integral Suppression, Non-Reversing, Panel Mounted Miniature Contactor (Square D LP1K)	236.35	62.15
26 29 13 13-0336	EA	3 Phase (3 HP At 200/230 Volt, 7-1/2 HP At 460 Volt, 10 HP At 575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 4 Pole, Without Auxiliary Contacts, 12 Amperes, 20 Amperes, DC Coil, Non-Reversing, Panel Mounted Miniature Contactor (Square D LP1K)	252.05	67.80
26 29 13 13-0337	EA	3 Phase (2 HP At 200 Volt, 3 HP At 230 Volt, 5 HP At 460/575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 4 Pole, Without Auxiliary Contacts, 9 Amperes, 20 Amperes, DC Coil With Integral Suppression, Non-Reversing, Panel Mounted Miniature Contactor (Square D LP1K)	242.94	62.15

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 29 13 13-0338	EA	3 Phase (3 HP At 200/230 Volt, 7-1/2 HP At 460 Volt, 10 HP At 575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 3 Pole, Auxiliary Contacts, 12 Amperes, 20 Amperes, DC Coil With Integral Suppression, Non-Reversing, Panel Mounted Miniature Contactor (Square D LP1K)	263.03	67.80
26 29 13 13-0339	EA	3 Phase (2 HP At 200 Volt, 3 HP At 230 Volt, 5 HP At 460/575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 3 Pole, Auxiliary Contacts, 9 Amperes, 20 Amperes, DC Low Consumption Coil With Integral Suppression, Non-Reversing, Panel Mounted Miniature Contactor (Square D LP4K)	245.14	62.15
26 29 13 13-0340	EA	3 Phase (2 HP At 200 Volt, 3 HP At 230 Volt, 5 HP At 460/575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 4 Pole, Without Auxiliary Contacts, 9 Amperes, 20 Amperes, DC Low Consumption Coil With Integral Suppression, Non-Reversing, Panel Mounted Miniature Contactor (Square D LP4K)	245.14	62.15
26 29 13 13-0341	EA	3 Phase (3 HP At 200/230 Volt, 7-1/2 HP At 460 Volt, 10 HP At 575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 3 Pole, Auxiliary Contacts, 12 Amperes, 20 Amperes, DC Low Consumption Coil With Integral Suppression, Non-Reversing, Panel Mounted Miniature Contactor (Square D LP4K)	274.02	67.80
26 29 13 13-0342	EA	3 Phase (3 HP At 200/230 Volt, 7-1/2 HP At 460 Volt, 10 HP At 575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 4 Pole, Without Auxiliary Contacts, 12 Amperes, 20 Amperes, DC Low Consumption Coil With Integral Suppression, Non-Reversing, Panel Mounted Miniature Contactor (Square D LP4K)	274.02	67.80

26 29 13 13-0343 Reversing, Panel Mounted Miniature Contactor *(26 29 13 13-0324)*

26 29 13 13-0344	EA	3 Phase (1-1/2 HP At 200/230 Volt, 3 HP At 460/575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 3 Pole, Auxiliary Contacts, 6 Amperes, 15 Amperes, AC Coil, Reversing, Panel Mounted Miniature Contactor (Square D LC2K)	255.81	56.50
26 29 13 13-0345	EA	3 Phase (1-1/2 HP At 200/230 Volt, 3 HP At 460/575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 3 Pole, Auxiliary Contacts, 6 Amperes, 15 Amperes, AC Coil With Integral Suppression, Reversing, Panel Mounted Miniature Contactor (Square D LC2K)	277.78	56.50
26 29 13 13-0346	EA	3 Phase (2 HP At 200 Volt, 3 HP At 230 Volt, 5 HP At 460/575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 3 Pole, Auxiliary Contacts, 9 Amperes, 20 Amperes, AC Coil, Reversing, Panel Mounted Miniature Contactor (Square D LC2K)	307.76	62.15
26 29 13 13-0347	EA	3 Phase (2 HP At 200 Volt, 3 HP At 230 Volt, 5 HP At 460/575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 4 Pole, Without Auxiliary Contacts, 9 Amperes, 20 Amperes, AC Coil, Reversing, Panel Mounted Miniature Contactor (Square D LC2K)	307.76	62.15
26 29 13 13-0348	EA	3 Phase (2 HP At 200 Volt, 3 HP At 230 Volt, 5 HP At 460/575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 3 Pole, Auxiliary Contacts, 9 Amperes, 20 Amperes, AC Coil With Integral Suppression, Reversing, Panel Mounted Miniature Contactor (Square D LC2K)	329.73	62.15
26 29 13 13-0349	EA	3 Phase (3 HP At 200/230 Volt, 7-1/2 HP At 460 Volt, 10 HP At 575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 3 Pole, Auxiliary Contacts, 12 Amperes, 20 Amperes, AC Coil, Reversing, Panel Mounted Miniature Contactor (Square D LC2K)	345.43	67.80
26 29 13 13-0350	EA	3 Phase (3 HP At 200/230 Volt, 7-1/2 HP At 460 Volt, 10 HP At 575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 4 Pole, Without Auxiliary Contacts, 12 Amperes, 20 Amperes, AC Coil, Reversing, Panel Mounted Miniature Contactor (Square D LC2K)	345.43	67.80
26 29 13 13-0351	EA	3 Phase (1-1/2 HP At 200/230 Volt, 3 HP At 460/575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 3 Pole, Auxiliary Contacts, 6 Amperes, 15 Amperes, DC Coil, Reversing, Panel Mounted Miniature Contactor (Square D LP2K)	296.46	56.50
26 29 13 13-0352	EA	3 Phase (1-1/2 HP At 200/230 Volt, 3 HP At 460/575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 3 Pole, Auxiliary Contacts, 6 Amperes, 15 Amperes, DC Coil With Integral Suppression, Reversing, Panel Mounted Miniature Contactor (Square D LP2K)	318.43	56.50
26 29 13 13-0353	EA	3 Phase (2 HP At 200 Volt, 3 HP At 230 Volt, 5 HP At 460/575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 3 Pole, Auxiliary Contacts, 9 Amperes, 20 Amperes, DC Coil, Reversing, Panel Mounted Miniature Contactor (Square D LP2K)	346.21	62.15
26 29 13 13-0354	EA	3 Phase (2 HP At 200 Volt, 3 HP At 230 Volt, 5 HP At 460/575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 3 Pole, Auxiliary Contacts, 9 Amperes, 20 Amperes, DC Coil With Integral Suppression, Reversing, Panel Mounted Miniature Contactor (Square D LP2K)	368.18	62.15
26 29 13 13-0355	EA	3 Phase (3 HP At 200/230 Volt, 7-1/2 HP At 460 Volt, 10 HP At 575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 3 Pole, Auxiliary Contacts, 12 Amperes, 20 Amperes, DC Coil, Reversing, Panel Mounted Miniature Contactor (Square D LP2K)	390.47	67.80
26 29 13 13-0356	EA	3 Phase (3 HP At 200/230 Volt, 7-1/2 HP At 460 Volt, 10 HP At 575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 3 Pole, Auxiliary Contacts, 12 Amperes, 20 Amperes, DC Coil With Integral Suppression, Reversing, Panel Mounted Miniature Contactor (Square D LP2K)	412.44	67.80
26 29 13 13-0357	EA	3 Phase (2 HP At 200 Volt, 3 HP At 230 Volt, 5 HP At 460/575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 3 Pole, Auxiliary Contacts, 9 Amperes, 20 Amperes, DC Low Consumption Coil With Integral Suppression, Reversing, Panel Mounted Miniature Contactor (Square D LP5K)	334.13	62.15
26 29 13 13-0358	EA	3 Phase (2 HP At 200 Volt, 3 HP At 230 Volt, 5 HP At 460/575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 3 Pole, Auxiliary Contacts, 9 Amperes, 20 Amperes, DC Low Consumption Coil With Integral Suppression, Reversing, Panel Mounted Miniature Contactor (Square D LP5K)	385.76	62.15
26 29 13 13-0359	EA	3 Phase (3 HP At 200/230 Volt, 7-1/2 HP At 460 Volt, 10 HP At 575 Volt), 1 Phase (1/2 HP At 115 Volt, 1-1/2 HP At 230 Volt), 3 Pole, Auxiliary Contacts, 12 Amperes, 20 Amperes, DC Low Consumption Coil With Integral Suppression, Reversing, Panel Mounted Miniature Contactor (Square D LP5K)	436.61	67.80

26 29 13 13-0360 Panel Mounted Miniature Contactor Accessories *(26 29 13 13-0324)*

26 29 13 13-0361	EA	2 Auxiliary Contacts, 10 Amperes, Panel Mounted Miniature Contactor Accessory (Square D LA1KN02)	73.75	28.25
26 29 13 13-0362	EA	4 Auxiliary Contacts, 10 Amperes, Panel Mounted Miniature Contactor Accessory (Square D LA1KN40)	82.23	28.25
26 29 13 13-0363	EA	Electronic Time Delay Contact, 2 Amperes, Panel Mounted Miniature Contactor Accessory (Square D LA2KT2U)	97.59	28.25
26 29 13 13-0364	EA	Overload Relay, Panel Mounted Miniature Contactor Accessory (Square D LR2K0301)	128.14	28.25

26 29 13 13-0365 Reduced Voltage Auto Transformer Type 240-600 Volt, 3 Pole *(26 29 13 13)*

26 29 13 13-0366 NEMA 1 Enclosure *(26 29 13 13-0365)*

26 29 13 13-0367	EA	Reduced Voltage Auto Transformer Starter, Size 3, 50 HP, NEMA 1, 240 - 600 Volt, 3 Pole, Non-Reversing	7,725.00	541.44
		For NEMA 4, Add	*827.39*	
26 29 13 13-0368	EA	Reduced Voltage Auto Transformer Starter, Size 4, 100 HP, NEMA 1, 240 - 600 Volt, 3 Pole, Non-Reversing	13,536.43	721.93
		For NEMA 4, Add	*1,511.28*	
26 29 13 13-0369	EA	Reduced Voltage Auto Transformer Starter, Size 5, 200 HP, NEMA 1, 240 - 600 Volt, 3 Pole, Non-Reversing	23,775.68	857.28
		For NEMA 4, Add	*2,758.32*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 29 13 13-0370	EA	Reduced Voltage Auto Transformer Starter, Size 6, 300 HP, NEMA 1, 240 - 600 Volt, 3 Pole, Non-Reversing	58,179.73	1,049.05
		For NEMA 4, Add	*7,011.35*	
26 29 13 13-0371	EA	Reduced Voltage Auto Transformer Starter, Size 7, 600 HP, NEMA 1, 240 - 600 Volt, 3 Pole, Non-Reversing	92,884.07	1,342.32
		For NEMA 4, Add	*11,274.79*	
26 29 13 13-0372		**NEMA 12 Enclosure** *(26 29 13 13-0365)*		
26 29 13 13-0373	EA	Reduced Voltage Auto Transformer Starter, Size 3, 50 HP, NEMA 12, 240 - 600 Volt, 3 Pole, Non-Reversing	7,669.87	552.95
26 29 13 13-0374	EA	Reduced Voltage Auto Transformer Starter, Size 4, 100 HP, NEMA 12, 240 - 600 Volt, 3 Pole, Non-Reversing	13,435.72	723.05
26 29 13 13-0375	EA	Reduced Voltage Auto Transformer Starter, Size 5, 200 HP, NEMA 12, 240 - 600 Volt, 3 Pole, Non-Reversing	23,591.88	854.57
26 29 13 13-0376	EA	Reduced Voltage Auto Transformer Starter, Size 6, 300 HP, NEMA 12, 240 - 600 Volt, 3 Pole, Non-Reversing	57,712.53	1,044.42
26 29 13 13-0377	EA	Reduced Voltage Auto Transformer Starter, Size 7, 600 HP, NEMA 12, 240 - 600 Volt, 3 Pole, Non-Reversing	92,132.78	1,342.89
26 29 13 13-0378		**Factory Modifications Pilot Devices** *(26 29 13 13-0365)*		
26 29 13 13-0379	EA	Start-Stop Push-button, Factory Modification Reduced Voltage Auto Transformer Starter, 240 - 600 Volt, 3 Phase, Pilot Device	194.93	
26 29 13 13-0380	EA	H-O-A Select Switch, Factory Modification Reduced Voltage Auto Transformer Starter, 240 - 600 Volt, 3 Phase, Pilot Device	214.99	
26 29 13 13-0381	EA	Forward-Reverse-Stop, Factory Modification Reduced Voltage Auto Transformer Starter, 240 - 600 Volt, 3 Phase, Pilot Device	365.96	
26 29 13 13-0382	EA	Pilot Light, Factory Modification Reduced Voltage Auto Transformer Starter, 240 - 600 Volt, 3 Phase, Pilot Device	198.83	
26 29 13 13-0383	EA	Fused Control Circuit, Factory Modification Reduced Voltage Auto Transformer Starter, 240 - 600 Volt, 3 Phase, Pilot Device	285.90	
26 29 13 13-0384	EA	Auxiliary Interlock, Factory Modification Reduced Voltage Auto Transformer Starter, 240 - 600 Volt, 3 Phase, Pilot Device	142.95	
26 29 13 13-0385	EA	Auxiliary Relay, Factory Modification Reduced Voltage Auto Transformer Starter, 240 - 600 Volt, 3 Phase, Pilot Device	466.59	
26 29 13 13-0386		**Factory Modifications Meters** *(26 29 13 13-0365)*		
26 29 13 13-0387	EA	Ammeter And Switch, Factory Modification Reduced Voltage Auto Transformer Starter, 240 - 600 Volt, 3 Phase, Meter	1,875.53	
26 29 13 13-0388	EA	Voltmeter, Factory Modification Reduced Voltage Auto Transformer Starter, 240 - 600 Volt, 3 Phase, Meter	1,811.50	
26 29 13 13-0389	EA	Wattmeter, Factory Modification Reduced Voltage Auto Transformer Starter, 240 - 600 Volt, 3 Phase, Meter	640.42	
26 29 13 13-0390	EA	Elapsed-time Meter, Factory Modification Reduced Voltage Auto Transformer Starter, 240 - 600 Volt, 3 Phase, Meter	530.66	
26 29 13 13-0391		**Factory Modifications Main Circuit Breakers** *(26 29 13 13-0365)*		
26 29 13 13-0392	EA	Reduced Voltage Auto Transformer Starter, Size 3, Circuit Breaker, Factory Modification Main Circuit Breaker	2,478.79	
26 29 13 13-0393	EA	Reduced Voltage Auto Transformer Starter, Size 4, Circuit Breaker, Factory Modification Main Circuit Breaker	4,533.40	
26 29 13 13-0394	EA	Reduced Voltage Auto Transformer Starter, Size 5-7, Circuit Breaker, Factory Modification Main Circuit Breaker	9,642.97	
26 29 13 13-0395		**Factory Modifications Addition** *(26 29 13 13-0365)*		
		Note: For reversing service auto transformer type.		
26 29 13 13-0396	EA	Reduced Voltage Auto Transformer Starter, Size 3, Factory Modification For Reversing Type 240 - 600 Volt, 3 Phase	416.29	
26 29 13 13-0397	EA	Reduced Voltage Auto Transformer Starter, Size 4, Factory Modification For Reversing Type 240 - 600 Volt, 3 Phase	416.29	
26 29 13 13-0398	EA	Reduced Voltage Auto Transformer Starter, Size 5, Factory Modification For Reversing Type 240 - 600 Volt, 3 Phase	416.29	
26 29 13 13-0399	EA	Reduced Voltage Auto Transformer Starter, Size 6, 7, Factory Modification For Reversing Type 240 - 600 Volt, 3 Phase	416.29	
26 29 13 13-0400		**Combination Starters Non-Reversing** *(26 29 13 13)*		
26 29 13 13-0401		**240-600 Volt, 3-Pole** *(26 29 13 13-0400)*		
26 29 13 13-0402		**NEMA 1 With Disconnect (Safety) Switch** *(26 29 13 13-0401)*		
26 29 13 13-0403	EA	Combination Starter, Size 0, NEMA 1 With Disconnect Switch Non-Reversing, 240 - 600 Volt, 3 Phase	1,736.34	259.44
		For Electronic Overloads, Add	*230.68*	
26 29 13 13-0404	EA	Combination Starter, Size 1, NEMA 1 With Disconnect Switch Non-Reversing, 240 - 600 Volt, 3 Phase	2,098.22	406.09
		For Electronic Overloads, Add	*243.36*	
26 29 13 13-0405	EA	Combination Starter, Size 2, NEMA 1 With Disconnect Switch Non-Reversing, 240 - 600 Volt, 3 Phase	2,967.98	473.77
		For Electronic Overloads, Add	*385.31*	
26 29 13 13-0406	EA	Combination Starter, Size 3, NEMA 1 With Disconnect Switch Non-Reversing, 240 - 600 Volt, 3 Phase	4,550.52	586.57
		For Electronic Overloads, Add	*641.35*	
26 29 13 13-0407	EA	Combination Starter, Size 4, NEMA 1 With Disconnect Switch Non-Reversing, 240 - 600 Volt, 3 Phase	8,390.87	936.25
		For Electronic Overloads, Add	*1,237.06*	
26 29 13 13-0408	EA	Combination Starter, Size 5, NEMA 1 With Disconnect Switch Non-Reversing, 240 - 600 Volt, 3 Phase	16,968.32	1,173.12
		For Electronic Overloads, Add	*2,777.48*	
26 29 13 13-0409		**NEMA 1 With Circuit Breaker** *(26 29 13 13-0401)*		
26 29 13 13-0410	EA	Combination Starter, Size 0, NEMA 1 With Circuit Breaker, Non-Reversing, 240 - 600 Volt, 3 Phase	2,216.65	259.44
		For Electronic Overloads, Add	*321.94*	
26 29 13 13-0411	EA	Combination Starter, Size 1, NEMA 1 With Circuit Breaker, Non-Reversing, 240 - 600 Volt, 3 Phase	2,578.53	406.09
		For Electronic Overloads, Add	*334.62*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 29 13 13-0412	EA	Combination Starter, Size 2, NEMA 1 With Circuit Breaker, Non-Reversing, 240 - 600 Volt, 3 Phase	3,434.95	473.77
		For Electronic Overloads, Add	*474.04*	
26 29 13 13-0413	EA	Combination Starter, Size 3, NEMA 1 With Circuit Breaker, Non-Reversing, 240 - 600 Volt, 3 Phase	4,804.02	586.57
		For Electronic Overloads, Add	*689.51*	
26 29 13 13-0414	EA	Combination Starter, Size 4, NEMA 1 With Circuit Breaker, Non-Reversing, 240 - 600 Volt, 3 Phase	9,845.14	936.25
		For Electronic Overloads, Add	*1,513.37*	
26 29 13 13-0415	EA	Combination Starter, Size 5, NEMA 1 With Circuit Breaker, Non-Reversing, 240 - 600 Volt, 3 Phase	20,824.14	1,173.12
		For Electronic Overloads, Add	*3,510.08*	

26 29 13 13-0416 Factory Modifications For NEMA 1 Enclosure *(26 29 13 13-0401)*

26 29 13 13-0417	EA	Start-Stop Push-button, Factory Modifications - NEMA 1 Combination Motor Starter, 240 - 600 Volt	218.73	
26 29 13 13-0418	EA	H-O-A Select Switch, Factory Modifications - NEMA 1 Combination Motor Starter, 240 - 600 Volt	513.74	
26 29 13 13-0419	EA	Pilot Light, Factory Modifications - NEMA 1 Combination Motor Starter, 240 - 600 Volt	354.57	

26 29 13 13-0420 NEMA 4 With Disconnect (Safety) Switch *(26 29 13 13-0401)*

26 29 13 13-0421	EA	Combination Starter, Size 0, NEMA 4 With Disconnect Switch Non-Reversing, 240 - 600 Volt, 3 Phase	3,191.24	338.40
		For Electronic Overloads, Add	*474.04*	
26 29 13 13-0422	EA	Combination Starter, Size 1, NEMA 4 With Disconnect Switch Non-Reversing, 240 - 600 Volt, 3 Phase	3,501.66	473.77
		For Electronic Overloads, Add	*486.71*	
26 29 13 13-0423	EA	Combination Starter, Size 2, NEMA 4 With Disconnect Switch Non-Reversing, 240 - 600 Volt, 3 Phase	5,047.02	518.88
		For Electronic Overloads, Add	*760.49*	
26 29 13 13-0424	EA	Combination Starter, Size 3, NEMA 4 With Disconnect Switch Non-Reversing, 240 - 600 Volt, 3 Phase	8,071.07	631.68
		For Electronic Overloads, Add	*1,295.37*	
26 29 13 13-0425	EA	Combination Starter, Size 4, NEMA 4 With Disconnect Switch Non-Reversing, 240 - 600 Volt, 3 Phase	12,793.71	936.25
		For Electronic Overloads, Add	*2,073.60*	
26 29 13 13-0426	EA	Combination Starter, Size 5, NEMA 4 With Disconnect Switch Non-Reversing, 240 - 600 Volt, 3 Phase	28,202.23	1,173.12
		For Electronic Overloads, Add	*4,911.92*	

26 29 13 13-0427 NEMA 4 With Circuit Breaker *(26 29 13 13-0401)*

26 29 13 13-0428	EA	Combination Starter, Size 0, NEMA 4 With Circuit Breaker, Non-Reversing, 240 - 600 Volt, 3 Phase	3,671.55	338.40
		For Electronic Overloads, Add	*565.30*	
26 29 13 13-0429	EA	Combination Starter, Size 1, NEMA 4 With Circuit Breaker, Non-Reversing, 240 - 600 Volt, 3 Phase	3,981.97	473.77
		For Electronic Overloads, Add	*577.97*	
26 29 13 13-0430	EA	Combination Starter, Size 2, NEMA 4 With Circuit Breaker, Non-Reversing, 240 - 600 Volt, 3 Phase	5,513.99	518.88
		For Electronic Overloads, Add	*849.21*	
26 29 13 13-0431	EA	Combination Starter, Size 3, NEMA 4 With Circuit Breaker, Non-Reversing, 240 - 600 Volt, 3 Phase	8,324.56	631.68
		For Electronic Overloads, Add	*1,343.53*	
26 29 13 13-0432	EA	Combination Starter, Size 4, NEMA 4 With Circuit Breaker, Non-Reversing, 240 - 600 Volt, 3 Phase	14,247.98	936.25
		For Electronic Overloads, Add	*2,349.91*	
26 29 13 13-0433	EA	Combination Starter, Size 5, NEMA 4 With Circuit Breaker, Non-Reversing, 240 - 600 Volt, 3 Phase	26,694.59	1,173.12
		For Electronic Overloads, Add	*4,625.47*	

26 29 13 13-0434 Factory Modifications For NEMA 4 Enclosure *(26 29 13 13-0401)*

26 29 13 13-0435	EA	Start-Stop Push-button, Factory Modifications - NEMA 4 Combination Motor Starter, 240 - 600 Volt	218.76	
26 29 13 13-0436	EA	H-0-A Select Switch, Factory Modifications - NEMA 4 Combination Motor Starter, 240 - 600 Volt	513.74	
26 29 13 13-0437	EA	Pilot Light, Factory Modifications - NEMA 4 Combination Motor Starter, 240 - 600 Volt	354.57	

26 29 13 13-0438 NEMA 12 With Disconnect (Safety) Switch *(26 29 13 13-0401)*

26 29 13 13-0439	EA	Combination Starter, Size 0, NEMA 12 With Disconnect Switch Non-Reversing, 240 - 600 Volt, 3 Phase	1,797.04	261.13
		For Electronic Overloads, Add	*242.22*	
26 29 13 13-0440	EA	Combination Starter, Size 1, NEMA 12 With Disconnect Switch Non-Reversing, 240 - 600 Volt, 3 Phase	2,162.25	408.67
		For Electronic Overloads, Add	*255.52*	
26 29 13 13-0441	EA	Combination Starter, Size 2, NEMA 12 With Disconnect Switch Non-Reversing, 240 - 600 Volt, 3 Phase	3,069.38	470.04
		For Electronic Overloads, Add	*404.58*	
26 29 13 13-0442	EA	Combination Starter, Size 3, NEMA 12 With Disconnect Switch Non-Reversing, 240 - 600 Volt, 3 Phase	4,719.29	587.47
		For Electronic Overloads, Add	*673.41*	
26 29 13 13-0443	EA	Combination Starter, Size 4, NEMA 12 With Disconnect Switch Non-Reversing, 240 - 600 Volt, 3 Phase	8,716.41	940.08
		For Electronic Overloads, Add	*1,298.92*	
26 29 13 13-0444	EA	Combination Starter, Size 5, NEMA 12 With Disconnect Switch Non-Reversing, 240 - 600 Volt, 3 Phase	17,699.22	1,174.93
		For Electronic Overloads, Add	*2,916.35*	

26 29 13 13-0445 NEMA 12 With Circuit Breaker *(26 29 13 13-0401)*

26 29 13 13-0446	EA	Combination Starter, Size 0, NEMA 12 With Circuit Breaker, Non-Reversing, 240 - 600 Volt, 3 Phase	2,370.56	261.13
		For Electronic Overloads, Add	*351.18*	
26 29 13 13-0447	EA	Combination Starter, Size 1, NEMA 12 With Circuit Breaker, Non-Reversing, 240 - 600 Volt, 3 Phase	2,738.50	408.67
		For Electronic Overloads, Add	*365.01*	
26 29 13 13-0448	EA	Combination Starter, Size 2, NEMA 12 With Circuit Breaker, Non-Reversing, 240 - 600 Volt, 3 Phase	3,661.59	470.04
		For Electronic Overloads, Add	*517.10*	
26 29 13 13-0449	EA	Combination Starter, Size 3, NEMA 12 With Circuit Breaker, Non-Reversing, 240 - 600 Volt, 3 Phase	5,133.67	587.47
		For Electronic Overloads, Add	*752.15*	
26 29 13 13-0450	EA	Combination Starter, Size 4, NEMA 12 With Circuit Breaker, Non-Reversing, 240 - 600 Volt, 3 Phase	10,568.68	940.08
		For Electronic Overloads, Add	*1,650.85*	
26 29 13 13-0451	EA	Combination Starter, Size 5, NEMA 12 With Circuit Breaker, Non-Reversing, 240 - 600 Volt, 3 Phase	22,502.29	1,174.93
		For Electronic Overloads, Add	*3,828.93*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 29 13 13-0452		Factory Modifications For NEMA 12 Enclosure *(26 29 13 13-0401)*		
26 29 13 13-0453	EA	Start-Stop Push-button, Factory Modifications - NEMA 12 Combination Motor Starter, 240 - 600 Volt	216.94	
26 29 13 13-0454	EA	H-O-A Select Switch, Factory Modifications - NEMA 12 Combination Motor Starter, 240 - 600 Volt	509.47	
26 29 13 13-0455	EA	Pilot Light, Factory Modifications - NEMA 12 Combination Motor Starter, 240 - 600 Volt	351.62	
26 29 13 13-0456		NEMA 7 Or 9 With Circuit Breaker *(26 29 13 13-0401)*		
26 29 13 13-0457	EA	Combination Starter, Size 0, NEMA 7 Or 9 With Circuit Breaker, Non-Reversing, 240 - 600 Volt, 3 Phase	4,192.57	541.44
26 29 13 13-0458	EA	Combination Starter, Size 1, NEMA 7 Or 9 With Circuit Breaker, Non-Reversing, 240 - 600 Volt, 3 Phase	5,680.18	721.93
26 29 13 13-0459	EA	Combination Starter, Size 2, NEMA 7 Or 9 With Circuit Breaker, Non-Reversing, 240 - 600 Volt, 3 Phase	6,174.23	992.64
26 29 13 13-0460	EA	Combination Starter, Size 3, NEMA 7 Or 9 With Circuit Breaker, Non-Reversing, 240 - 600 Volt, 3 Phase	9,175.12	1,353.61
26 29 13 13-0461	EA	Combination Starter, Size 4, NEMA 7 Or 9 With Circuit Breaker, Non-Reversing, 240 - 600 Volt, 3 Phase	13,826.03	1,895.05
26 29 13 13-0462		Factory Modifications For NEMA 7 Or 9 Enclosure *(26 29 13 13-0401)*		
26 29 13 13-0463	EA	Start-Stop Push-button, Factory Modifications - NEMA 7 Or 9 Combination Motor Starter, 240 - 600 Volt	1,300.81	
26 29 13 13-0464	EA	H-0-A Select Switch, Factory Modifications - NEMA 7 Or 9 Combination Motor Starter, 240 - 600 Volt	1,300.81	
26 29 13 13-0465	EA	Pilot Light, Factory Modifications - NEMA 7 Or 9 Combination Motor Starter, 240 - 600 Volt	1,300.81	
26 29 13 13-0466		Combination Starters Reversing *(26 29 13 13)*		
26 29 13 13-0467		240-600 Volt, 3 Pole *(26 29 13 13-0466)*		
26 29 13 13-0468		NEMA 1 With Disconnect (Safety) Switch *(26 29 13 13-0467)*		
26 29 13 13-0469	EA	Combination Starter, Size 0, NEMA 1 With Disconnect Switch, Reversing, 240 - 600 Volt, 3 Phase	2,143.14	338.40
26 29 13 13-0470	EA	Combination Starter, Size 1, NEMA 1 With Disconnect Switch, Reversing, 240 - 600 Volt, 3 Phase	2,483.73	473.77
26 29 13 13-0471	EA	Combination Starter, Size 2, NEMA 1 With Disconnect Switch, Reversing, 240 - 600 Volt, 3 Phase	3,624.85	518.88
26 29 13 13-0472	EA	Combination Starter, Size 3, NEMA 1 With Disconnect Switch, Reversing, 240 - 600 Volt, 3 Phase	5,529.26	631.68
26 29 13 13-0473	EA	Combination Starter, Size 4, NEMA 1 With Disconnect Switch, Reversing, 240 - 600 Volt, 3 Phase	10,835.54	936.25
26 29 13 13-0474		NEMA 1 With Circuit Breaker *(26 29 13 13-0467)*		
26 29 13 13-0475	EA	Combination Starter, Size 0, NEMA 1 With Circuit Breaker, Reversing, 240 - 600 Volt, 3 Phase	2,396.56	338.40
26 29 13 13-0476	EA	Combination Starter, Size 1, NEMA 1 With Circuit Breaker, Reversing, 240 - 600 Volt, 3 Phase	2,754.25	473.77
26 29 13 13-0477	EA	Combination Starter, Size 2, NEMA 1 With Circuit Breaker, Reversing, 240 - 600 Volt, 3 Phase	3,941.53	518.88
26 29 13 13-0478	EA	Combination Starter, Size 3, NEMA 1 With Circuit Breaker, Reversing, 240 - 600 Volt, 3 Phase	5,093.27	631.68
26 29 13 13-0479	EA	Combination Starter, Size 4, NEMA 1 With Circuit Breaker, Reversing, 240 - 600 Volt, 3 Phase	11,692.13	936.25
26 29 13 13-0480		NEMA 12 With Disconnect (Safety) Switch *(26 29 13 13-0467)*		
26 29 13 13-0481	EA	Combination Starter, Size 0, NEMA 12 With Disconnect Switch, Reversing, 240 - 600 Volt, 3 Phase	2,290.50	348.22
26 29 13 13-0482	EA	Combination Starter, Size 1, NEMA 12 With Disconnect Switch, Reversing, 240 - 600 Volt, 3 Phase	2,640.97	470.04
26 29 13 13-0483	EA	Combination Starter, Size 2, NEMA 12 With Disconnect Switch, Reversing, 240 - 600 Volt, 3 Phase	3,887.68	522.26
26 29 13 13-0484	EA	Combination Starter, Size 3, NEMA 12 With Disconnect Switch, Reversing, 240 - 600 Volt, 3 Phase	5,964.79	626.72
26 29 13 13-0485	EA	Combination Starter, Size 4, NEMA 12 With Disconnect Switch, Reversing, 240 - 600 Volt, 3 Phase	11,747.71	940.08
26 29 13 13-0486		NEMA 12 With Circuit Breaker *(26 29 13 13-0467)*		
26 29 13 13-0487	EA	Combination Starter, Size 0, NEMA 12 With Circuit Breaker, Reversing, 240 - 600 Volt, 3 Phase	2,569.74	348.22
26 29 13 13-0488	EA	Combination Starter, Size 1, NEMA 12 With Circuit Breaker, Reversing, 240 - 600 Volt, 3 Phase	2,939.05	470.04
26 29 13 13-0489	EA	Combination Starter, Size 2, NEMA 12 With Circuit Breaker, Reversing, 240 - 600 Volt, 3 Phase	4,236.62	522.26
26 29 13 13-0490	EA	Combination Starter, Size 3, NEMA 12 With Circuit Breaker, Reversing, 240 - 600 Volt, 3 Phase	5,484.39	626.72
26 29 13 13-0491	EA	Combination Starter, Size 4, NEMA 12 With Circuit Breaker, Reversing, 240 - 600 Volt, 3 Phase	12,691.55	940.08
26 29 13 13-0492		NEMA 7 Or 9 With Circuit Breaker *(26 29 13 13-0467)*		
26 29 13 13-0493	EA	Combination Starter, Size 0, NEMA 7 Or 9 With Circuit Breaker, Reversing, 240 - 600 Volt, 3 Phase	5,082.47	721.93
26 29 13 13-0494	EA	Combination Starter, Size 1, NEMA 7 Or 9 With Circuit Breaker, Reversing, 240 - 600 Volt, 3 Phase	5,456.91	902.41
26 29 13 13-0495	EA	Combination Starter, Size 2, NEMA 7 Or 9 With Circuit Breaker, Reversing, 240 - 600 Volt, 3 Phase	7,850.03	1,173.12
26 29 13 13-0496	EA	Combination Starter, Size 3, NEMA 7 Or 9 With Circuit Breaker, Reversing, 240 - 600 Volt, 3 Phase	12,500.22	1,534.09
26 29 13 13-0497	EA	Combination Starter, Size 4, NEMA 7 Or 9 With Circuit Breaker, Reversing, 240 - 600 Volt, 3 Phase	22,840.65	2,075.53
26 29 13 13-0498		Solid State Motor Controllers *(26 29 13 13)*		
26 29 13 13-0499		Adjustable Voltage Drives, DC Motors *(26 29 13 13-0498)*		
26 29 13 13-0500	EA	0.5-1.5 HP DC Solid State Motor Controller, Reversing With Dynamic Braking	1,705.02	203.04
26 29 13 13-0501	EA	0.5-2.0 HP DC Solid State Motor Controller, Non-Reversing With Dynamic Braking	2,059.64	203.04
26 29 13 13-0502		Removal And Reinstallation Of Motor Starters *(26 29 13 13)*		
		Note: Includes storage and cleaning.		
26 29 13 13-0503	EA	Removal And Reinstallation Of Up To 25 HP Motor Starter With Disconnect	805.72	
26 29 13 13-0504		Auxiliary Devices *(26 29 13 13)*		
26 29 13 13-0505	EA	Normally Open, Auxiliary Contact	501.69	112.80
26 29 13 13-0506	EA	Normally Closed, Auxiliary Contact	501.69	112.80

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 29 13 13-0507	EA	Pilot Light Kit	529.56	112.80

26 29 23 Variable-Frequency Motor Controllers *(26 29)*

26 29 23 00-0001 208/230 Volt, Ultra Low Harmonic (ULH) Variable Frequency Drives *(26 29 23)*

Note: 1 or 3 phase. Wall mounted. ABB ACH580 Series. Includes full voltage bypass with main input circuit breaker. NEMA 1 enclosure.

26 29 23 00-0002	EA	3/4 HP, 208/230 Volt Variable Frequency Drive	2,261.34	459.53
		For 6-Pulse Drive Package, Deduct	*-738.19*	
26 29 23 00-0003	EA	1 HP, 208/230 Volt Variable Frequency Drive	2,545.00	502.24
		For 6-Pulse Drive Package, Deduct	*-849.84*	
26 29 23 00-0004	EA	1-1/2 HP, 208/230 Volt Variable Frequency Drive	2,955.35	552.24
		For 6-Pulse Drive Package, Deduct	*-1,017.97*	
26 29 23 00-0005	EA	2 HP, 208/230 Volt Variable Frequency Drive	3,111.93	530.83
		For 6-Pulse Drive Package, Deduct	*-1,127.65*	
26 29 23 00-0006	EA	3 HP, 208/230 Volt Variable Frequency Drive	3,336.74	578.75
		For 6-Pulse Drive Package, Deduct	*-1,198.58*	
26 29 23 00-0007	EA	5 HP, 208/230 Volt Variable Frequency Drive	3,605.41	578.75
		For 6-Pulse Drive Package, Deduct	*-1,346.35*	
26 29 23 00-0008	EA	7.5 HP, 208/230 Volt Variable Frequency Drive	4,307.60	691.03
		For 6-Pulse Drive Package, Deduct	*-1,609.05*	
26 29 23 00-0009	EA	10 HP, 208/230 Volt Variable Frequency Drive	4,695.69	691.03
		For 6-Pulse Drive Package, Deduct	*-1,822.50*	
26 29 23 00-0010	EA	15 HP, 208/230 Volt Variable Frequency Drive	6,200.60	1,040.48
		For 6-Pulse Drive Package, Deduct	*-2,265.80*	
26 29 23 00-0011	EA	20 HP, 208/230 Volt Variable Frequency Drive	7,275.30	1,040.48
		For 6-Pulse Drive Package, Deduct	*-2,856.89*	
26 29 23 00-0012	EA	25 HP, 208/230 Volt Variable Frequency Drive	8,884.00	1,382.17
		For 6-Pulse Drive Package, Deduct	*-3,365.87*	
26 29 23 00-0013	EA	30 HP, 208/230 Volt Variable Frequency Drive	10,227.36	1,382.17
		For 6-Pulse Drive Package, Deduct	*-4,104.72*	
26 29 23 00-0014	EA	40 HP, 208/230 Volt Variable Frequency Drive	11,391.61	1,382.17
		For 6-Pulse Drive Package, Deduct	*-4,745.05*	
26 29 23 00-0015	EA	50 HP, 208/230 Volt Variable Frequency Drive	15,017.44	1,747.25
		For 6-Pulse Drive Package, Deduct	*-6,337.68*	
26 29 23 00-0016	EA	60 HP, 208/230 Volt Variable Frequency Drive	18,104.88	2,066.95
		For 6-Pulse Drive Package, Deduct	*-7,684.03*	
26 29 23 00-0017	EA	75 HP, 208/230 Volt Variable Frequency Drive	20,493.08	2,066.95
		For 6-Pulse Drive Package, Deduct	*-8,997.54*	

26 29 23 00-0018 460/480 Volt, Ultra Low Harmonic (ULH) Variable Frequency Drives *(26 29 23)*

Note: 3 Phase. ABB ACH580 Series. Includes full voltage bypass with main circuit breaker. NEMA 1 enclosure.

26 29 23 00-0019	EA	3 HP, 460/480 Volt Variable Frequency Drive Note: Wall mounted.	5,355.31	826.81
		For 6-Pulse Drive Package, Deduct	*-2,035.94*	
26 29 23 00-0020	EA	5 HP, 460/480 Volt Variable Frequency Drive Note: Wall mounted.	5,534.42	826.81
		For 6-Pulse Drive Package, Deduct	*-2,134.45*	
26 29 23 00-0021	EA	7.5 HP, 460/480 Volt Variable Frequency Drive Note: Wall mounted.	6,059.98	985.15
		For 6-Pulse Drive Package, Deduct	*-2,249.38*	
26 29 23 00-0022	EA	10 HP, 460/480 Volt Variable Frequency Drive Note: Wall mounted.	6,089.83	985.15
		For 6-Pulse Drive Package, Deduct	*-2,265.80*	
26 29 23 00-0023	EA	15 HP, 460/480 Volt Variable Frequency Drive Note: Wall mounted.	8,181.39	1,493.52
		For 6-Pulse Drive Package, Deduct	*-2,856.89*	
26 29 23 00-0024	EA	20 HP, 460/480 Volt Variable Frequency Drive Note: Wall mounted.	8,599.32	1,493.52
		For 6-Pulse Drive Package, Deduct	*-3,086.75*	
26 29 23 00-0025	EA	25 HP, 460/480 Volt Variable Frequency Drive Note: Wall mounted.	10,358.78	1,970.30
		For 6-Pulse Drive Package, Deduct	*-3,530.06*	
26 29 23 00-0026	EA	30 HP, 460/480 Volt Variable Frequency Drive Note: Wall mounted.	11,851.40	1,970.30
		For 6-Pulse Drive Package, Deduct	*-4,351.00*	
26 29 23 00-0027	EA	40 HP, 460/480 Volt Variable Frequency Drive Note: Wall mounted.	13,403.73	1,970.30
		For 6-Pulse Drive Package, Deduct	*-5,204.78*	
26 29 23 00-0028	EA	50 HP, 460/480 Volt Variable Frequency Drive Note: Wall mounted.	17,543.44	2,502.75
		For 6-Pulse Drive Package, Deduct	*-6,895.93*	
26 29 23 00-0029	EA	60 HP, 460/480 Volt Variable Frequency Drive Note: Wall mounted.	23,369.77	2,967.96
		For 6-Pulse Drive Package, Deduct	*-9,588.62*	
26 29 23 00-0030	EA	75 HP, 460/480 Volt Variable Frequency Drive Note: Wall mounted.	24,802.69	2,967.96
		For 6-Pulse Drive Package, Deduct	*-10,376.73*	
26 29 23 00-0031	EA	100 HP, 460/480 Volt Variable Frequency Drive Note: Wall mounted.	28,705.17	3,307.22
		For 6-Pulse Drive Package, Deduct	*-12,149.97*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 29 23 00-0032	EA	125 HP, 460/480 Volt Variable Frequency Drive Note: Wall mounted.	30,257.50	3,307.22
		For 6-Pulse Drive Package, Deduct	*-13,003.75*	
26 29 23 00-0033	EA	150 HP, 460/480 Volt Variable Frequency Drive Note: Floor mounted.	33,481.57	3,307.22
		For 6-Pulse Drive Package, Deduct	*-14,776.99*	
26 29 23 00-0034	EA	200 HP, 460/480 Volt Variable Frequency Drive Note: Floor mounted.	38,671.21	3,991.42
		For 6-Pulse Drive Package, Deduct	*-16,878.60*	
26 29 23 00-0035	EA	250 HP, 460/480 Volt Variable Frequency Drive Note: Floor mounted.	48,322.35	4,169.56
		For 6-Pulse Drive Package, Deduct	*-21,990.78*	
26 29 23 00-0036	EA	300 HP, 460/480 Volt Variable Frequency Drive Note: Floor mounted.	56,664.15	4,784.42
		For 6-Pulse Drive Package, Deduct	*-25,902.42*	
26 29 23 00-0037	EA	350 HP, 460/480 Volt Variable Frequency Drive Note: Floor mounted.	65,161.93	5,188.86
		For 6-Pulse Drive Package, Deduct	*-30,131.26*	
26 29 23 00-0038	EA	400 HP, 460/480 Volt Variable Frequency Drive Note: Floor mounted.	75,487.66	5,602.90
		For 6-Pulse Drive Package, Deduct	*-35,355.09*	
26 29 23 00-0039	EA	450 HP, 460/480 Volt Variable Frequency Drive Note: Floor mounted.	81,360.31	6,075.73
		For 6-Pulse Drive Package, Deduct	*-38,064.86*	

26 29 33 Controllers for Fire Pump Drivers *(26 29)*

26 29 33 13 Full-Service Controllers for Fire Pump Electric-Motor Drivers *(26 29 33)*

26 29 33 13-0001 Electric Controllers For Fire Pumps *(26 29 33 13)*

26 29 33 13-0002 Wye-Delta (Star-Delta), Closed Transition Electric Fire Pump Controller *(26 29 33 13-0001)*

26 29 33 13-0003	EA	30 HP Wye-Delta (Star-Delta), Closed Transition Electric Fire Pump Controller With Automatic Transfer Switch	23,630.68	238.73
26 29 33 13-0004	EA	40 HP Wye-Delta (Star-Delta), Closed Transition Electric Fire Pump Controller With Automatic Transfer Switch	26,753.25	265.26
26 29 33 13-0005	EA	50 HP Wye-Delta (Star-Delta), Closed Transition Electric Fire Pump Controller With Automatic Transfer Switch	28,050.86	291.78
26 29 33 13-0006	EA	75 HP Wye-Delta (Star-Delta), Closed Transition Electric Fire Pump Controller With Automatic Transfer Switch	31,983.47	318.31
26 29 33 13-0007	EA	150 HP Wye-Delta (Star-Delta), Closed Transition Electric Fire Pump Controller With Automatic Transfer Switch	33,796.58	371.35
26 29 33 13-0008	EA	175 HP Wye-Delta (Star-Delta), Closed Transition Electric Fire Pump Controller With Automatic Transfer Switch	36,026.16	477.45
26 29 33 13-0009	EA	200 HP Wye-Delta (Star-Delta), Closed Transition Electric Fire Pump Controller With Automatic Transfer Switch	39,049.69	530.51
26 29 33 13-0010	EA	250 HP Wye-Delta (Star-Delta), Closed Transition Electric Fire Pump Controller With Automatic Transfer Switch	44,660.66	604.77
26 29 33 13-0011	EA	300 HP Wye-Delta (Star-Delta), Closed Transition Electric Fire Pump Controller With Automatic Transfer Switch	53,818.81	652.52
26 29 33 13-0012	EA	350 HP Wye-Delta (Star-Delta), Closed Transition Electric Fire Pump Controller With Automatic Transfer Switch	63,248.07	742.71
26 29 33 13-0013	EA	400 HP Wye-Delta (Star-Delta), Closed Transition Electric Fire Pump Controller With Automatic Transfer Switch	75,458.40	795.76
26 29 33 13-0014	EA	500 HP Wye-Delta (Star-Delta), Closed Transition Electric Fire Pump Controller With Automatic Transfer Switch	85,185.80	848.82

26 29 33 19 Controllers for Fire Pump Diesel Engine Drivers *(26 29 33)*

See CSI section 26 29 33 13-0000 for controllers for fire pump diesel engine drivers.

26 30 Facility Electrical Power Generating and Storing Equipment *(26)*

26 31 Photovoltaic Collectors *(26 30)*

26 31 00 00-0001 Photovoltaic Collectors *(26 31)*

26 31 00 00-0002	EA	90 Watt Solar Panel (Ameresco VLS-90T) Note: 47.40" x 21.10" x 2"	498.86	107.16
26 31 00 00-0003	EA	140 Watt Solar Panel (Ameresco VLS-140T) Note: 59.20" x 26.50" x 2"	616.73	107.16
26 31 00 00-0004	EA	1 Panel, 40 To 90 Watt, Side Of Pole Mounting (SPM) (Ameresco 1X-SPM)	302.62	28.20
26 31 00 00-0005	EA	1 Panel, 125 To 150 Watt, Side Of Pole Mounting (SPM) (Ameresco 1X-SPM)	334.11	28.20

26 31 00 00-0006 Rigid Photovoltaic Modules *(26 31)*

26 31 00 00-0007 Sanyo Rigid Photovoltaic Modules *(26 31 00 00-0006)*

26 31 00 00-0008	EA	205 Watt Hybrid Monocrystalline With Thin Amorphous Layers Photovoltaic Module, 62.2" x 31.4", 16.3% Module Efficiency (Sanyo HIP-205NHKA6)	2,284.42	107.16
		For >25 To 50, Deduct	*-165.97*	
		For >50 To 100, Deduct	*-223.08*	
		For >100, Deduct	*-331.95*	
26 31 00 00-0009	EA	210 Watt Hybrid Monocrystalline With Thin Amorphous Layers Photovoltaic Module, 62.2" x 31.4", 16.7% Module Efficiency (Sanyo HIP-210NHKA6)	2,396.63	107.16
		For >25 To 50, Deduct	*-174.39*	
		For >50 To 100, Deduct	*-234.31*	
		For >100, Deduct	*-348.78*	
26 31 00 00-0010	EA	215 Watt Hybrid Monocrystalline With Thin Amorphous Layers Photovoltaic Module, 62.2" x 31.4", 17.1% Module Efficiency (Sanyo HIP-215HNKA6)	2,240.40	107.16
		For >25 To 50, Deduct	*-162.67*	
		For >50 To 100, Deduct	*-218.68*	
		For >100, Deduct	*-325.34*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 31 00 00-0011		**Sharp Rigid Photovoltaic Modules** *(26 31 00 00-0006)*		
26 31 00 00-0012	EA	224 Watt Polycrystalline Photovoltaic Module, 64.6" x 39.1", 13.74% Module Efficiency (Sharp ND-224UC1)	1,779.14	107.16
		For >25 To 50, Deduct	*-128.08*	
		For >50 To 100, Deduct	*-172.56*	
		For >100, Deduct	*-256.16*	
26 31 00 00-0013	EA	230 Watt Monocrystalline Photovoltaic Module, 64.6" x 39.1", 14.1% Module Efficiency (Sharp NU-U230F3)	2,029.61	107.16
		For >25 To 50, Deduct	*-146.86*	
		For >50 To 100, Deduct	*-197.60*	
		For >100, Deduct	*-293.73*	
26 31 00 00-0014	EA	235 Watt Monocrystalline Photovoltaic Module, 64.6" x 39.1", 14.4% Module Efficiency (Sharp NU-U235F1)	2,069.29	107.16
		For >25 To 50, Deduct	*-149.84*	
		For >50 To 100, Deduct	*-201.57*	
		For >100, Deduct	*-299.68*	
26 31 00 00-0015	EA	240 Watt Monocrystalline Photovoltaic Module, 64.6" x 39.1", 14.7% Module Efficiency (Sharp NU-U240F1)	1,945.29	107.16
		For >25 To 50, Deduct	*-140.54*	
		For >50 To 100, Deduct	*-189.17*	
		For >100, Deduct	*-281.08*	
26 31 00 00-0016		**BP Solar Rigid Photovoltaic Modules** *(26 31 00 00-0006)*		
		Note: Approved for applications in NEC Class 1, Division 2, Groups C and D hazardous locations.		
26 31 00 00-0017	EA	50 Watt Polycrystalline Photovoltaic Module, 33" x 21.1" (BP SX350J)	856.49	107.16
		For >25 To 50, Deduct	*-58.88*	
		For >50 To 100, Deduct	*-80.29*	
		For >100, Deduct	*-117.76*	
26 31 00 00-0018	EA	75 Watt Polycrystalline Photovoltaic Module, 47.6" x 21.14" (BP SX375J)	1,067.28	107.16
		For >25 To 50, Deduct	*-74.69*	
		For >50 To 100, Deduct	*-101.37*	
		For >100, Deduct	*-149.38*	
26 31 00 00-0019	EA	80 Watt Polycrystalline Photovoltaic Module, 47.6" x 20.9" (BP SX380J)	1,151.60	107.16
		For >25 To 50, Deduct	*-81.01*	
		For >50 To 100, Deduct	*-109.80*	
		For >100, Deduct	*-162.02*	
26 31 00 00-0020		**Photovoltaic Inverters** *(26 31)*		
26 31 00 00-0021		**Fronius Photovoltaic Inverters** *(26 31 00 00-0020)*		
26 31 00 00-0022	EA	3 KW Photovoltaic Inverter (Fronius IG Plus 3.0-1)	5,498.10	112.80
26 31 00 00-0023	EA	5 KW Photovoltaic Inverter (Fronius IG Plus 5.0-1)	7,266.14	112.80
26 31 00 00-0024	EA	6 KW Photovoltaic Inverter (Fronius IG Plus 6.0-1)	7,672.35	112.80
26 31 00 00-0025	EA	7.5 KW Photovoltaic Inverter (Fronius IG Plus 7.5-1)	8,583.71	112.80
26 31 00 00-0026	EA	10 KW Photovoltaic Inverter (Fronius IG Plus 10.0-1)	13,617.59	112.80
26 31 00 00-0027	EA	12 KW Photovoltaic Inverter (Fronius IG Plus 12.0-3-1)	15,836.57	112.80
26 31 00 00-0028	EA	11.4 KW Photovoltaic Inverter (Fronius IG Plus 11.4-3 Delta)	12,845.35	225.60
26 31 00 00-0029	EA	11.4 KW Photovoltaic Inverter (Fronius IG Plus 11.4-3)	16,280.28	225.60
26 31 00 00-0030	EA	Inverter Display Stand (Fronius 4,045,894)	464.20	56.40
26 31 00 00-0031		**SMA Photovoltaic Inverters** *(26 31 00 00-0020)*		
26 31 00 00-0032	EA	4 KW AC Photovoltaic Inverter (SMA Sunny Boy 4000TL-US-22)	4,071.96	112.80
26 31 00 00-0033	EA	5 KW AC Photovoltaic Inverter (SMA Sunny Boy 5000TL-US-22)	4,896.39	112.80
26 31 00 00-0034	EA	6 KW AC Photovoltaic Inverter (SMA Sunny Boy 6000TL-US-22)	5,664.72	112.80
26 31 00 00-0035	EA	7 KW AC Photovoltaic Inverter (SMA Sunny Boy 7000TL-US-22)	6,251.27	112.80
26 31 00 00-0036	EA	8 KW AC Photovoltaic Inverter (SMA Sunny Boy 8000TL-US-12)	6,053.69	112.80
26 31 00 00-0037		**PVPowered Photovoltaic Inverters** *(26 31 00 00-0020)*		
26 31 00 00-0038	EA	120 Volt, 1.1 KW Photovoltaic Inverter (PVPowered PVP1100)	5,049.33	112.80
26 31 00 00-0039	EA	240 Volt, 2 KW Photovoltaic Inverter (PVPowered PVP2000)	5,282.88	112.80
26 31 00 00-0040	EA	240 Volt, 2.5 KW Photovoltaic Inverter (PVPowered PVP2500)	5,841.43	112.80
26 31 00 00-0041	EA	240 Volt, 3.5 KW Photovoltaic Inverter (PVPowered PVP3500)	6,923.49	141.01
26 31 00 00-0042	EA	208 Volt, 4.6 KW Photovoltaic Inverter (PVPowered PVP4600)	8,442.24	169.20
26 31 00 00-0043	EA	240 Volt, 4.8 KW Photovoltaic Inverter (PVPowered PVP4800)	8,513.34	169.20
26 31 00 00-0044	EA	240 Volt, 5.2 KW Photovoltaic Inverter (PVPowered PVP5200)	8,986.56	169.20
26 31 00 00-0045	EA	208 Volt, 75 KW Photovoltaic Inverter (PVPowered PVP75kW)	107,566.56	902.41
26 31 00 00-0046	EA	480 Volt, 75 KW Photovoltaic Inverter (PVPowered PVP75kW)	107,709.39	902.41
26 31 00 00-0047	EA	208 Volt, 100 KW Photovoltaic Inverter (PVPowered PVP100kW)	116,579.81	902.41
26 31 00 00-0048	EA	480 Volt, 100 KW Photovoltaic Inverter (PVPowered PVP100kW)	108,050.24	902.41
26 31 00 00-0049		**Solectria Photovoltaic Inverters** *(26 31 00 00-0020)*		
26 31 00 00-0050	EA	208 Or 480 Volt, 10 KW Photovoltaic Inverter (Solectria PVI)	16,884.46	225.60
26 31 00 00-0051	EA	208 Or 480 Volt, 13 KW Photovoltaic Inverter (Solectria PVI)	16,884.46	225.60
26 31 00 00-0052	EA	208 Volt, 15 KW, Photovoltaic Inverter (Solectria PVI)	17,380.76	225.60
26 31 00 00-0053	EA	480 Volt, 15 KW Photovoltaic Inverter (Solectria PVI)	17,380.76	225.60
26 31 00 00-0054	EA	208 Volt, 50 KW Photovoltaic Inverter (Solectria PVI)	52,914.33	676.80
26 31 00 00-0055	EA	480 Volt, 50 KW Photovoltaic Inverter (Solectria PVI)	50,432.80	676.80
26 31 00 00-0056	EA	208 Volt, 60 KW Photovoltaic Inverter (Solectria PVI)	57,877.40	676.80
26 31 00 00-0057	EA	480 Volt, 60 KW Photovoltaic Inverter (Solectria PVI)	56,498.77	676.80
26 31 00 00-0058	EA	208 Volt, 75 KW Photovoltaic Inverter (Solectria PVI)	61,461.83	676.80
26 31 00 00-0059	EA	480 Volt, 75 KW Photovoltaic Inverter (Solectria PVI)	58,704.58	676.80

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 31 00 00-0060	EA	208 Volt, 85 KW Photovoltaic Inverter (Solectria PVI)	64,670.29	902.41
26 31 00 00-0061	EA	480 Volt, 85 KW Photovoltaic Inverter (Solectria PVI)	61,637.31	902.41
26 31 00 00-0062	EA	208 Volt, 100 KW Photovoltaic Inverter (Solectria PVI)	67,151.82	902.41
26 31 00 00-0063	EA	480 Volt, 100 KW Photovoltaic Inverter (Solectria PVI)	63,567.39	902.41
26 31 00 00-0064		**Xantrex Photovoltaic Inverters** *(26 31 00 00-0020)*		
26 31 00 00-0065	EA	0.6 KW Photovoltaic Inverter (Xantrex 806-1206)	699.31	28.20
26 31 00 00-0066	EA	1 KW Photovoltaic Inverter (Xantrex 806-1210)	763.17	28.20
26 31 00 00-0067	EA	2 KW Photovoltaic Inverter (Xantrex 806-1220)	1,232.47	28.20
26 31 00 00-0068		**Photovoltaic DC-DC Converters** *(26 31)*		
26 31 00 00-0069	EA	15 Amperes, 20 To 35 Volt Input, 13.8 Volt Output DC Voltage Converter (Samlex SDC-20) Note: Hazardous locations.	402.03	42.30
26 31 00 00-0070	EA	20 Amperes, 20 To 35 Volt Input, 13.8 Volt Output DC Voltage Converter (Samlex SDC-23)	263.15	42.30
26 31 00 00-0071	EA	60 Amperes, 20 To 35 Volt Input, 13.8 Volt Output DC Voltage Converter (Samlex SDC-60)	759.13	42.30
26 31 00 00-0072		**Photovoltaic Combiner Boxes** *(26 31)*		
26 31 00 00-0073		**Midnight Solar Photovoltaic Combiner Boxes** *(26 31 00 00-0072)*		
26 31 00 00-0074	EA	3 - 150 Volt DC Breaker Or 3 - 600 Volt DC Fuse Holder, NEMA 3R, Aluminum Photovoltaic Combiner Box (Midnite Solar MNPV3)	459.77	112.80
26 31 00 00-0075	EA	6 - 150 Volt DC Breaker Or 4 - 600 Volt DC Fuse Holder, NEMA 3R, Aluminum Photovoltaic Combiner Box (Midnite Solar MNPV6)	446.90	112.80
26 31 00 00-0076	EA	12 - 150 Volt DC Breaker Or 10 - 600 Volt DC Fuse Holder, NEMA 3R, Aluminum Photovoltaic Combiner Box (Midnite Solar MNPV12)	714.71	169.20
26 31 00 00-0077	EA	6 - 300 Volt DC Breaker, NEMA 3R, Aluminum Photovoltaic Combiner Box (Midnite Solar MNPV12-250)	719.22	169.20
26 31 00 00-0078	EA	16, 600 Volt DC Breakers, NEMA 3R, Aluminum Photovoltaic Combiner Box (Midnite Solar MNPV16)	1,136.39	169.20
26 31 00 00-0079		**SMA Photovoltaic Combiner Boxes** *(26 31 00 00-0072)*		
26 31 00 00-0080	EA	6 Input NEMA 3R, Steel Photovoltaic Combiner Box (SMA SBCB-6)	1,066.76	112.80
26 31 00 00-0081	EA	12 Input NEMA 3R, Steel Photovoltaic Combiner Box (SMA SCCB-12)	1,285.93	112.80
26 31 00 00-0082	EA	28 Input NEMA 3R, Steel Photovoltaic Combiner Box (SMA SCCB-28)	2,488.10	225.60
26 31 00 00-0083	EA	52 Input NEMA 3R, Steel Photovoltaic Combiner Box (SMA SCCB-52)	5,824.99	225.60
26 31 00 00-0084	EA	4 Input NEMA 3R, Steel Combination DC Disconnect And Photovoltaic Combiner Box (SMA Combi-Switch)	948.15	112.80
26 31 00 00-0085		**Photovoltaic Charge Controller** *(26 31)*		
26 31 00 00-0086	EA	35 Amperes, 12 Or 24 Volt, Charge Controller (Xantrex C-35)	317.71	42.30
26 31 00 00-0087	EA	40 Amperes, 12 Or 24 Volt, Charge Controller (Xantrex C-40)	429.31	42.30
26 31 00 00-0088	EA	60 Amperes, 12 Or 24 Volt, Charge Controller (Xantrex C-60)	503.70	42.30
26 31 00 00-0089	EA	Remote Digital Meter For Xantrex C-35, 40 And 60	382.19	42.30
26 31 00 00-0090	EA	MPPT Charge Controller (Xantrex XW SCC)	1,357.59	56.40
26 31 00 00-0091		**Photovoltaic Batteries** *(26 31)*		
26 31 00 00-0092		**Concorde Photovoltaic Batteries** *(26 31 00 00-0091)*		
26 31 00 00-0093	EA	34 Ampere Hours, 12 Volt, Sealed Absorbed Glass Mat (AGM) Battery (Concorde PVX-340T)	301.42	16.92
26 31 00 00-0094	EA	45 Ampere Hours, 12 Volt, Sealed Absorbed Glass Mat (AGM) Battery (Concorde PVX-420T)	379.59	22.56
26 31 00 00-0095	EA	49 Ampere Hours, 12 Volt, Sealed Absorbed Glass Mat (AGM) Battery (Concorde PVX-490T)	412.02	22.56
26 31 00 00-0096	EA	56 Ampere Hours, 12 Volt, Sealed Absorbed Glass Mat (AGM) Battery (Concorde PVX-560T)	469.04	33.84
26 31 00 00-0097	EA	69 Ampere Hours, 12 Volt, Sealed Absorbed Glass Mat (AGM) Battery (Concorde PVX-690T)	535.94	33.84
26 31 00 00-0098	EA	89 Ampere Hours, 12 Volt, Sealed Absorbed Glass Mat (AGM) Battery (Concorde PVX-890T)	636.41	39.48
26 31 00 00-0099	EA	104 Ampere Hours, 12 Volt, Sealed Absorbed Glass Mat (AGM) Battery (Concorde PVX-1040T)	729.93	45.12
26 31 00 00-0100	EA	108 Ampere Hours, 12 Volt, Sealed Absorbed Glass Mat (AGM) Battery (Concorde PVX-1080T)	721.27	45.12
26 31 00 00-0101	EA	210 Ampere Hours, 12 Volt, Sealed Absorbed Glass Mat (AGM) Battery (Concorde PVX-2120T)	1,333.55	53.58
26 31 00 00-0102	EA	255 Ampere Hours, 12 Volt, Sealed Absorbed Glass Mat (AGM) Battery (Concorde PVX-2580T)	1,544.33	56.40
26 31 00 00-0103		**Deka Photovoltaic Batteries** *(26 31 00 00-0091)*		
26 31 00 00-0104	EA	31 Amperes Hours Capacity At 20 Hour Lead Acid Battery (Deka BYDK8GU1)	311.93	28.25
26 31 00 00-0105	EA	50 Amperes Hours Capacity At 20 Hour Lead Acid Battery (Deka BYDK8G22NF)	433.44	28.25
26 31 00 00-0106	EA	74 Amperes Hours Capacity At 20 Hour Lead Acid Battery (Deka BYDK8G24)	644.24	28.25
26 31 00 00-0107	EA	86 Amperes Hours Capacity At 20 Hour Lead Acid Battery (Deka BYDK8G27)	738.47	28.25
26 31 00 00-0108	EA	98 Amperes Hours Capacity At 20 Hour Lead Acid Battery (Deka BYDK8G31)	740.95	28.25
26 31 00 00-0109	EA	183 Amperes Hours Capacity At 20 Hour Lead Acid Battery (Deka BYDK8G4D)	1,445.24	28.25
26 31 00 00-0110	EA	225 Amperes Hours Capacity At 20 Hour Lead Acid Battery (Deka BYDK8G8D)	1,673.39	28.25
26 31 00 00-0111		**Battery Enclosures** *(26 31 00 00-0091)*		
26 31 00 00-0112	EA	14" x 12" x 8" NEMA 3R Aluminum Photovoltaic Battery Enclosure (IronRidge 55-2501-010)	353.99	28.20
26 31 00 00-0113	EA	22" x 16" x 8" NEMA 3R Aluminum Photovoltaic Battery Enclosure (IronRidge BETS1GC)	1,775.07	28.25
26 31 00 00-0114	EA	37" x 16" x 8" NEMA 3R Aluminum Photovoltaic Battery Enclosure (IronRidge BETS2GCL)	1,668.44	28.25
26 31 00 00-0115	EA	37" x 16" x 14.5" NEMA 3R Aluminum Photovoltaic Battery Enclosure (IronRidge BETS4GC)	2,226.41	28.25
26 31 00 00-0116	EA	15" x 17.1" x 8.4" NEMA 3R Aluminum Photovoltaic Battery Enclosure (IronRidge BETSLCF1)	986.46	28.25
26 31 00 00-0117	EA	31" x 36" x 14" NEMA 3R Aluminum Photovoltaic Battery Enclosure (IronRidge BETSBR827BP)	2,333.05	28.25

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 31 00 00-0118		**Photovoltaic System Monitoring** *(26 31)*		
26 31 00 00-0119	EA	Solar Inverter Monitor (Xantrex 864-0203)	748.15	56.40
26 31 00 00-0120	EA	Photovoltaic System Monitoring, Remote Diagnosis, Data Storage Communication Hub (SMA Sunny WebBox)	1,579.68	28.20
26 31 00 00-0121	EA	Sun Radiation And Temperature Monitor (SMA Sunny SensorBox)	1,318.12	28.20
26 31 00 00-0122	EA	PT100 Ambient Temperature Sensor For Sunny SensorBox (SMA)	234.51	28.20
26 31 00 00-0123	EA	Wind Sensor Accessory For Sunny SensorBox (SMA)	584.68	56.40
26 31 00 00-0124	EA	Sunny Boy Control with RS485 (SMA)	1,553.64	28.20
26 31 00 00-0125	EA	RS 485 Module (SMA)	345.04	28.20
26 31 00 00-0126	EA	RS 232 Module (SMA)	353.99	28.20
26 31 00 00-0127	EA	Wireless Monitor with Bluetooth (SMA Sunny Beam)	662.61	
26 31 00 00-0128	EA	Bluetooth Piggy-Back Computer Card (SMA)	358.82	28.20
26 31 00 00-0129	EA	RS485-N Communication Computer Card (SMA)	356.32	28.20
26 31 00 00-0130	EA	Bluetooth Repeater (SMA)	682.48	28.20
26 31 00 00-0131	EA	Sunny Boy PC Service Cable (SMA)	326.13	8.46
26 31 00 00-0132	EA	Integrated Revenue Grade Meter, Option (PVPowered)	6,360.94	
26 31 00 00-0133	EA	Data Monitoring Module (PVPowered PVM1010)	681.02	28.20
26 31 00 00-0134	EA	Wireless IG Personal Display (Fronius 4,240,108)	673.50	
26 31 00 00-0135	EA	DatCom Power Supply (Fronius 43,0001,2311)	221.36	
26 31 00 00-0136	EA	Wireless Card For IG Personal Display (Fronius 4,240,008,Z)	401.05	28.20
26 31 00 00-0137	EA	Retrofit Solar Inverter Interface And Power Supply Option Communication Card (Fronius 4,240,001,Z)	337.57	28.20
26 31 00 00-0138	EA	Datalogger Pro Box (Fronius 4,240,102)	1,359.05	28.20
26 31 00 00-0139	EA	Datalogger Easy Box (Fronius 4,240,103)	880.06	28.20
26 31 00 00-0140	EA	Datalogger Interface Box (Fronius 4,240,105)	1,535.80	28.20
26 31 00 00-0141	EA	Datalogger Web (Fronius 4,240,122)	2,647.28	28.20
26 31 00 00-0142	EA	Interface Box (Fronius 4,240,109)	702.92	28.20
26 31 00 00-0143	EA	Interface Card (Fronius 4,240,009,Z)	498.28	28.20
26 31 00 00-0144	EA	Interface Card Easy (Fronius 4,240,013,Z)	324.68	28.20
26 31 00 00-0145	EA	Sensor Box (Fronius 4,240,104)	1,419.90	28.20
26 31 00 00-0146	EA	Ambient Temperature Sensor (Fronius 43,0001,1188)	147.30	28.20
26 31 00 00-0147	EA	Irradiance Sensor (Fronius 43,0001,1188)	485.68	28.20
26 31 00 00-0148	EA	Module Temperature Sensor (Fronius 43,0001,1190)	542.21	28.20
26 31 00 00-0149	EA	Wind Speed Sensor (Fronius 42,0411,0027)	270.10	56.40
26 31 00 00-0150		**Photovoltaic System Accessories** *(26 31)*		
26 31 00 00-0151	EA	Four Inverter Bypass Switch (OutBack AC-IOB-100Q)	1,033.41	56.40
26 31 00 00-0152	EA	Line Communication Filter (Enphase LCF)	2,256.64	112.80
26 31 00 00-0153	EA	15 Meter RS 485 Communication Cable (SMA)	173.15	8.46
26 31 00 00-0154	EA	15 Meter RS 232 Communication Cable (SMA)	262.43	8.46
26 31 00 00-0155	EA	24" #10 AWG Male Or Female Photovoltaic Multi-Contact Module Interconnect	38.93	2.80
26 31 00 00-0156	EA	36" #10 AWG Male Or Female Photovoltaic Multi-Contact Module Interconnect	41.92	2.80
26 31 00 00-0157	EA	48" #10 AWG Male Or Female Photovoltaic Multi-Contact Module Interconnect	43.61	2.80
26 31 00 00-0158	EA	72" #10 AWG Male Or Female Photovoltaic Multi-Contact Module Interconnect	48.30	2.80
26 31 00 00-0159	EA	120" #10 AWG Male Or Female Photovoltaic Multi-Contact Module Interconnect	55.33	2.80
26 31 00 00-0160	EA	240" #10 AWG Male Or Female Photovoltaic Multi-Contact Module Interconnect	87.23	5.58
26 31 00 00-0161	EA	360" #10 AWG Male Or Female Photovoltaic Multi-Contact Module Interconnect	109.05	5.58
26 31 00 00-0162	EA	420" #10 AWG Male Or Female Photovoltaic Multi-Contact Module Interconnect	142.56	8.38
26 31 00 00-0163	EA	36" #10 AWG Male And Female Photovoltaic Multi-Contact Module Interconnect	49.47	2.80
26 31 00 00-0164	EA	120" #10 AWG Male And Female Photovoltaic Multi-Contact Module Interconnect	69.39	2.80
26 31 00 00-0165	EA	240" #10 AWG Male And Female Photovoltaic Multi-Contact Module Interconnect	101.29	5.58
26 31 00 00-0166	EA	360" #10 AWG Male And Female Photovoltaic Multi-Contact Module Interconnect	136.44	5.58
26 31 00 00-0167	EA	600" #10 AWG Male And Female Photovoltaic Multi-Contact Module Interconnect	220.15	11.17
26 31 00 00-0168	EA	1200" #10 AWG Male And Female Photovoltaic Multi-Contact Module Interconnect	230.07	11.17
26 31 00 00-0169	EA	Lighting Kit, 9 Watt Fluorescent, 12 Volt, 4.5 Ampere Hours Battery Note: Tamper proof enclosure.	4,098.95	304.56
26 31 00 00-0170		**Photovoltaic Mounting Systems** *(26 31)*		
26 31 00 00-0171	LF	Anodized Aluminum Photovoltaic Module Mounting Rail (UNIRAC SolarMount Standard)	13.34	2.82
26 31 00 00-0172	EA	Splice Bar For Photovoltaic Module Mounting Rail (UNIRAC 310229)	35.98	14.10
26 31 00 00-0173	EA	Splice Plate For Photovoltaic Module Mounting Rail (UNIRAC 310216)	47.02	14.10
26 31 00 00-0174	EA	8" x 3/8" Hanger Bolt (UNIRAC 310046) Note: Supports mounting rail above tile or metal roof.	25.51	5.64
26 31 00 00-0175	EA	Mounting Rail Grounding Clip (UNIRAC 980006) Note: One grounding clip for every two top mounting clamps (end clamps + mid clamps) in your installation. Only one of the two rails in each row requires grounding clips.	11.54	4.23
26 31 00 00-0176	EA	Mounting Rail Grounding Lugs (UNIRAC 980012) Note: Two grounding lugs for each rail splice and one additional lug for each rail.	26.02	5.64
26 31 00 00-0177	EA	Anodized Aluminum Photovoltaic Module Mounting End Clamp (UNIRAC 320002) Note: Four for each row of modules you plan to mount.	6.84	1.88
26 31 00 00-0178	EA	Anodized Aluminum Photovoltaic Module Mounting Mid Clamp (UNIRAC 320008) Note: For each row, take one less than the number of modules in the row and multiply that figure by 2.	7.20	1.88
26 31 00 00-0179	EA	Photovoltaic Module Mount L-Feet (UNIRAC 310065)	17.46	5.64
26 31 00 00-0180	EA	12" Leg Extension, Photovoltaic Module One Leg Tilt Kit (UNIRAC 310121) Note: Includes one square tube, one strut insert, two L-feet, and stainless steel hardware for use with mounting rail. Excludes standoffs.	106.05	28.20
26 31 00 00-0181	EA	30" Leg Extension, Photovoltaic Module One Leg Tilt Kit (UNIRAC 310122) Note: Includes one square tube, one strut insert, two L-feet, and stainless steel hardware for use with mounting rail. Excludes standoffs.	118.55	28.20

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 31 00 00-0182	EA	44" Leg Extension, Photovoltaic Module One Leg Tilt Kit (UNIRAC 310123) Note: Includes one square tube, one strut insert, two L-feet, and stainless steel hardware for use with mounting rail. Excludes standoffs.	128.61	28.20
26 31 00 00-0183	EA	12" Leg Extension, Photovoltaic Module Two Leg Tilt Kit (UNIRAC 310107) Note: Includes two square tubes, two strut inserts, and fasteners for use with mounting rail. Excludes standoffs and L-feet.	155.43	42.30
26 31 00 00-0184	EA	44" Leg Extension, Photovoltaic Module Two Leg Tilt Kit (UNIRAC 310108) Note: Includes two square tubes, two strut inserts, and fasteners for use with mounting rail. Excludes standoffs and L-feet.	192.92	42.30
26 31 00 00-0185	EA	72" Leg Extension, Photovoltaic Module Two Leg Tilt Kit (UNIRAC 310109) Note: Includes two square tubes, two strut inserts, and fasteners for use with mounting rail. Excludes standoffs and L-feet.	226.95	42.30
26 31 00 00-0186	EA	18" Leg Extension, Photovoltaic Module Four Leg Tilt Kit (UNIRAC 310111) Note: Includes four square tubes, four strut inserts, and fasteners for use with mounting rail. Excludes standoffs and L-feet.	246.12	56.40
26 31 00 00-0187	EA	64" Leg Extension, Photovoltaic Module Four Leg Tilt Kit (UNIRAC 310112) Note: Includes four square tubes, four strut inserts, and fasteners for use with mounting rail. Excludes standoffs and L-feet.	335.69	56.40
26 31 00 00-0188	EA	104" Leg Extension, Photovoltaic Module Four Leg Tilt Kit (UNIRAC 310110) Note: Includes four square tubes, four strut inserts, and fasteners for use with mounting rail. Excludes standoffs and L-feet.	469.86	84.60
26 31 00 00-0189	EA	Ballasted Photovoltaic Module Frame (UNIRAC 310351) Note: Excludes ballast.	229.03	
26 31 00 00-0190	EA	Ballasted Photovoltaic Module Frame With Module Mount (UNIRAC 310355) Note: Excludes ballast.	429.87	
26 31 00 00-0191	EA	3" High Galvanized Steel Photovoltaic Module Standoff (UNIRAC 310051)	81.08	28.20
26 31 00 00-0192	EA	4" High Galvanized Steel Photovoltaic Module Standoff (UNIRAC 310052)	82.23	28.20
26 31 00 00-0193	EA	6" High Galvanized Steel Photovoltaic Module Standoff (UNIRAC 310053)	83.28	28.20
26 31 00 00-0194	EA	7" High Galvanized Steel Photovoltaic Module Standoff (UNIRAC 310054)	85.91	28.20
26 31 00 00-0195	EA	3" High Aluminum Photovoltaic Module Standoff (UNIRAC 310553)	74.11	28.20
26 31 00 00-0196	EA	4" High Aluminum Photovoltaic Module Standoff (UNIRAC 310554)	75.44	28.20
26 31 00 00-0197	EA	6" High Aluminum Photovoltaic Module Standoff (UNIRAC 310555)	79.31	28.20
26 31 00 00-0198	EA	7" High Aluminum Photovoltaic Module Standoff (UNIRAC 310556)	78.21	28.20
26 31 00 00-0199	EA	3" Photovoltaic Module FastFoot Standoff Assembly (UNIRAC 310390)	160.29	42.30
26 31 00 00-0200	EA	4" Photovoltaic Module FastFoot Standoff Assembly (UNIRAC 310391)	161.09	42.30
26 31 00 00-0201	EA	7" Photovoltaic Module FastFoot Standoff Assembly (UNIRAC 310394)	163.45	42.30
26 31 00 00-0202	EA	Photovoltaic Module Rapidfoot Standoff Assembly (UNIRAC 310370)	160.98	42.30
26 31 00 00-0203	EA	Photovoltaic Module Standoff Flashing (UNIRAC 990103)	33.09	5.64
26 31 00 00-0204	EA	Photovoltaic Module Standoff Ethylene Propylene Diene Monomer (EPDM) Patch (UNIRAC 990161)	21.03	5.64
26 31 00 00-0205	EA	1/4" Photovoltaic Module Standing Seam Metal Roof Mounting Block (UNIRAC 004030M-0100)	40.81	8.46
26 31 00 00-0206	EA	3/8" Photovoltaic Module Standing Seam Metal Roof Mounting Block (UNIRAC 004031M-0100)	42.61	8.46
26 31 00 00-0207	EA	Photovoltaic Module Standing Seam Metal Roof Mounting Clamp (UNIRAC 004032M-0100) Note: Mid or end clamp.	12.09	1.88
26 31 00 00-0208	EA	Photovoltaic Module Tile Roof Mounting Hook (UNIRAC 905011C-0024)	56.30	5.64
26 31 00 00-0209	EA	Photovoltaic Module Wire Clip (UNIRAC 908002S-0100)	2.64	

26 32 Packaged Generator Assemblies *(26 30)*

26 32 13 Engine Generators *(26 32)*

26 32 13 13 Diesel-Engine-Driven Generator Sets *(26 32 13)*

See CSI section 01 22 23 00-0890 for fuel reimbursment for commissioning.

26 32 13 13-0001 Diesel Generator Sets (Cummins) *(26 32 13 13)*

Note: 3 Phase, 4-Wire 480/277 or 208/120 Volt complete with radiator, fuel pump, battery charger, silencer, exhaust flex, indicating and operating controls, electronic governor. Pricing based on installation above grade on concrete pad without enclosure. Includes manufacturer's representative at startup. Excludes fuel, fuel tank, enclosure, active diesel particulate filter, utility piping, wiring, automatic transfer switch, loadbank testing and concrete pad. See CSI section 01 22 23 00-0839 for loadbank rental, 26 36 23 00-0000 for automatic transfer switch.

26 32 13 13-0002	EA	20 KW, 3 Phase, Standby Diesel Generator Set (Cummins)	34,768.64	1,009.44
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*5,259.87*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*12,377.50*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*16,503.33*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*13,392.56*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*19,426.44*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*25,901.92*	
		For Single Phase, Add	*1,323.23*	
		For Tier 4 Diesel Generator, Add	*10,732.87*	
26 32 13 13-0003	EA	25 KW, 3 Phase, Standby Diesel Generator Set (Cummins)	36,568.90	1,066.22
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*5,259.87*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*12,377.50*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*16,503.33*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*13,392.56*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*19,426.44*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*25,901.92*	
		For Tier 4 Diesel Generator, Add	*11,297.76*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 32 13 13-0004	EA	30 KW, 3 Phase, Standby Diesel Generator Set (Cummins)	38,383.53	1,126.15
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*5,259.87*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*12,377.50*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*16,503.33*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*13,392.56*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*19,426.44*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*25,901.92*	
		For Single Phase, Add	*1,459.13*	
		For Tier 4 Diesel Generator, Add	*11,835.15*	
26 32 13 13-0005	EA	35 KW, 3 Phase, Standby Diesel Generator Set (Cummins)	39,139.94	1,242.87
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*5,259.87*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*12,377.50*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*16,503.33*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*13,392.56*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*19,426.44*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*25,901.92*	
		For Tier 4 Diesel Generator, Add	*11,986.29*	
26 32 13 13-0006	EA	40 KW, 3 Phase, Standby Diesel Generator Set (Cummins)	39,909.10	1,362.74
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*5,259.87*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*12,377.50*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*16,503.33*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*13,392.56*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*19,426.44*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*25,901.92*	
		For Tier 4 Diesel Generator, Add	*12,137.44*	
26 32 13 13-0007	EA	50 KW, 3 Phase, Standby Diesel Generator Set (Cummins)	46,880.04	1,564.63
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*5,259.87*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*12,377.50*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*16,503.33*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*13,392.56*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*19,426.44*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*25,901.92*	
		For Tier 4 Diesel Generator, Add	*14,422.67*	
26 32 13 13-0008	EA	60 KW, 3 Phase, Standby Diesel Generator Set (Cummins)	50,525.02	1,798.06
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*5,259.87*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*12,377.50*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*16,503.33*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*13,392.56*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*19,426.44*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*25,901.92*	
		For Tier 4 Diesel Generator, Add	*15,584.39*	
26 32 13 13-0009	EA	80 KW, 3 Phase, Standby Diesel Generator Set (Cummins)	59,394.41	2,107.21
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*5,259.87*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*12,377.50*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*16,503.33*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*13,392.56*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*19,426.44*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*25,901.92*	
		For Tier 4 Diesel Generator, Add	*18,438.63*	
26 32 13 13-0010	EA	100 KW, 3 Phase, Standby Diesel Generator Set (Cummins)	63,847.05	2,447.89
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*7,978.11*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*18,924.12*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*25,232.17*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*17,182.89*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*20,657.37*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*27,543.17*	
		For Tier 4 Diesel Generator, Add	*17,119.97*	
26 32 13 13-0011	EA	125 KW, 3 Phase, Standby Diesel Generator Set (Cummins)	65,233.24	2,902.14
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*7,978.11*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*18,924.12*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*25,232.17*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*17,182.89*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*20,657.37*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*27,543.17*	
		For Tier 4 Diesel Generator, Add	*17,272.86*	
26 32 13 13-0012	EA	150 KW, 3 Phase, Standby Diesel Generator Set (Cummins)	72,122.88	3,198.67
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*7,978.11*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*18,924.12*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*25,232.17*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*17,182.89*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*20,657.37*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*27,543.17*	
		For Tier 4 Diesel Generator, Add	*19,126.83*	
26 32 13 13-0013	EA	175 KW, 3 Phase, Standby Diesel Generator Set (Cummins)	75,799.47	3,570.89
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*7,978.11*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*18,924.12*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*25,232.17*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*17,182.89*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*20,657.37*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*27,543.17*	
		For Tier 4 Diesel Generator, Add	*20,162.66*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 32 13 13-0014	EA	200 KW, 3 Phase, Standby Diesel Generator Set (Cummins)	80,596.36	3,911.58
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*7,978.11*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*18,924.12*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*25,232.17*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*17,182.89*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*20,657.37*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*27,543.17*	
		For Tier 4 Diesel Generator, Add	*21,541.20*	
26 32 13 13-0015	EA	230 KW, 3 Phase, Standby Diesel Generator Set (Cummins)	86,974.82	4,132.39
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*7,978.11*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*18,924.12*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*25,232.17*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*17,182.89*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*20,657.37*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*27,543.17*	
		For Tier 4 Diesel Generator, Add	*23,478.20*	
26 32 13 13-0016	EA	250 KW, 3 Phase, Standby Diesel Generator Set (Cummins)	90,687.68	4,302.73
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*51,740.04*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*57,291.24*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*76,388.32*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*62,752.90*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*70,031.21*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*93,374.94*	
		For Tier 4 Diesel Generator, Add	*21,065.08*	
26 32 13 13-0017	EA	275 KW, 3 Phase, Standby Diesel Generator Set (Cummins)	98,763.65	4,536.17
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*51,740.04*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*57,291.24*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*76,388.32*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*62,752.90*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*70,031.21*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*93,374.94*	
		For Tier 4 Diesel Generator, Add	*23,111.26*	
26 32 13 13-0018	EA	300 KW, 3 Phase, Standby Diesel Generator Set (Cummins)	100,878.48	4,738.05
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*51,740.04*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*57,291.24*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*76,388.32*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*62,752.90*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*70,031.21*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*93,374.94*	
		For Tier 4 Diesel Generator, Add	*23,527.08*	
26 32 13 13-0019	EA	350 KW, 3 Phase, Standby Diesel Generator Set (Cummins)	113,859.94	5,299.55
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*51,740.04*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*57,291.24*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*76,388.32*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*62,752.90*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*70,031.21*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*93,374.94*	
		For Tier 4 Diesel Generator, Add	*26,877.24*	
26 32 13 13-0020	EA	400 KW, 3 Phase, Standby Diesel Generator Set (Cummins)	122,632.04	5,804.28
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*51,740.04*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*57,291.24*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*76,388.32*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*62,752.90*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*70,031.21*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*93,374.94*	
		For Tier 4 Diesel Generator, Add	*29,075.36*	
26 32 13 13-0021	EA	450 KW, 3 Phase, Standby Diesel Generator Set (Cummins)	138,635.21	6,252.22
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*51,740.04*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*57,291.24*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*76,388.32*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*62,752.90*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*70,031.21*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*93,374.94*	
		For Tier 4 Diesel Generator, Add	*33,294.01*	
26 32 13 13-0022	EA	500 KW, 3 Phase, Standby Diesel Generator Set (Cummins)	145,860.36	6,662.30
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*51,740.04*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*57,291.24*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*76,388.32*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*62,752.90*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*70,031.21*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*93,374.94*	
		For Tier 4 Diesel Generator, Add	*35,142.60*	
26 32 13 13-0023	EA	600 KW, 3 Phase, Standby Diesel Generator Set (Cummins)	212,734.43	7,337.36
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*105,695.41*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*127,281.97*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*169,709.29*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*124,318.39*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*148,281.58*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*197,708.77*	
		For Tier 4 Diesel Generator, Add	*48,108.95*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 32 13 13-0024	EA	750 KW, 3 Phase, Standby Diesel Generator Set (Cummins)	243,728.42	8,069.21
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*105,695.41*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*127,281.97*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*169,709.29*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*124,318.39*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*148,281.58*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*197,708.77*	
		For Tier 4 Diesel Generator, Add	*55,343.88*	
26 32 13 13-0025	EA	800 KW, 3 Phase, Standby Diesel Generator Set (Cummins)	254,563.87	8,245.85
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*105,695.41*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*127,281.97*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*169,709.29*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*124,318.39*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*148,281.58*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*197,708.77*	
		For Tier 4 Diesel Generator, Add	*57,912.00*	
26 32 13 13-0026	EA	900 KW, 3 Phase, Standby Diesel Generator Set (Cummins)	310,842.22	8,889.37
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*105,695.41*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*127,281.97*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*169,709.29*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*124,318.39*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*148,281.58*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*197,708.77*	
		For Tier 4 Diesel Generator, Add	*71,384.88*	
26 32 13 13-0027	EA	1,000 KW, 3 Phase, Standby Diesel Generator Set (Cummins)	347,171.03	9,463.49
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*105,695.41*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*127,281.97*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*169,709.29*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*124,318.39*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*148,281.58*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*197,708.77*	
		For Tier 4 Diesel Generator, Add	*79,582.27*	

26 32 13 13-0028 Diesel Generator Sets (Generac SD) *(26 32 13 13)*

Note: 3 Phase, 4-Wire 480/277 or 208/120 Volt complete with 24 hour run time fuel tank, radiator, fuel pump, battery charger, silencer, exhaust flex, indicating and operating controls, electronic governor. Pricing based on installation above grade on concrete pad. Includes startup and training. Excludes fuel, utility piping, wiring, automatic transfer switch, loadbank testing and concrete pad. See CSI section 01 22 23 00-0839 for loadbank rental, 01 22 23 00-0890 for fuel reimbursement, 26 36 23 00-0000 for automatic transfer switch.

26 32 13 13-0029	EA	10 KW, Industrial, Diesel Generator Set (Generac SD)	22,765.16	630.90
		For Steel Weather Protective Housing, Add	*3,220.96*	
		For Level 1 Steel Weather/Sound Protective Housing, Add	*5,964.64*	
26 32 13 13-0030	EA	15 KW, Industrial, Diesel Generator Set (Generac SD)	23,185.40	757.08
		For Steel Weather Protective Housing, Add	*3,220.96*	
		For Level 1 Steel Weather/Sound Protective Housing, Add	*5,964.64*	
26 32 13 13-0031	EA	20 KW, Industrial, Diesel Generator Set (Generac SD)	24,003.31	845.40
		For Steel Weather Protective Housing, Add	*3,220.96*	
		For Level 1 Steel Weather/Sound Protective Housing, Add	*5,964.64*	
26 32 13 13-0032	EA	25 KW, Industrial, Diesel Generator Set (Generac SD)	25,757.38	1,009.44
		For Steel Weather Protective Housing, Add	*3,220.96*	
		For Level 1 Steel Weather/Sound Protective Housing, Add	*5,964.64*	
26 32 13 13-0033	EA	30 KW, Industrial, Diesel Generator Set (Generac SD)	26,317.80	1,126.15
		For Steel Weather Protective Housing, Add	*3,220.96*	
		For Level 1 Steel Weather/Sound Protective Housing, Add	*5,964.64*	
26 32 13 13-0034	EA	35 KW, Industrial, Diesel Generator Set (Generac SD)	29,177.78	1,242.87
		For Steel Weather Protective Housing, Add	*3,220.96*	
		For Level 1 Steel Weather/Sound Protective Housing, Add	*5,964.64*	
26 32 13 13-0035	EA	40 KW, Industrial, Diesel Generator Set (Generac SD)	29,652.76	1,362.74
		For Steel Weather Protective Housing, Add	*3,220.96*	
		For Level 1 Steel Weather/Sound Protective Housing, Add	*5,964.64*	
26 32 13 13-0036	EA	50 KW, Industrial, Diesel Generator Set (Generac SD)	30,667.53	1,564.63
		For Steel Weather Protective Housing, Add	*3,220.96*	
		For Level 1 Steel Weather/Sound Protective Housing, Add	*5,964.64*	
26 32 13 13-0037	EA	60 KW, Industrial, Diesel Generator Set (Generac SD)	33,469.12	1,798.06
		For Steel Weather Protective Housing, Add	*3,904.20*	
		For Level 1 Steel Weather/Sound Protective Housing, Add	*7,838.66*	
26 32 13 13-0038	EA	80 KW, Industrial, Diesel Generator Set (Generac SD)	40,320.45	2,107.21
		For Steel Weather Protective Housing, Add	*3,904.20*	
		For Level 1 Steel Weather/Sound Protective Housing, Add	*8,452.59*	
		For Modular/Paralleling Unit (MD), Add	*3,430.07*	
26 32 13 13-0039	EA	100 KW, Industrial, Diesel Generator Set (Generac SD)	42,045.82	2,422.65
		For Steel Weather Protective Housing, Add	*5,790.58*	
		For Level 1 Steel Weather/Sound Protective Housing, Add	*10,338.97*	
		For Modular/Paralleling Unit (MD), Add	*3,534.05*	
26 32 13 13-0040	EA	135 KW, Industrial, Diesel Generator Set (Generac SD)	52,197.50	2,965.23
		For Steel Weather Protective Housing, Add	*5,790.58*	
		For Level 1 Steel Weather/Sound Protective Housing, Add	*10,689.37*	
		For Modular/Paralleling Unit (MD), Add	*4,395.37*	
26 32 13 13-0041	EA	150 KW, Industrial, Diesel Generator Set (Generac SD)	54,987.37	3,198.67
		For Steel Weather Protective Housing, Add	*5,790.58*	
		For Level 1 Steel Weather/Sound Protective Housing, Add	*10,689.37*	
		For Modular/Paralleling Unit (MD), Add	*4,616.05*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 32 13 13-0042	EA	180 KW, Industrial, Diesel Generator Set (Generac SD)	62,493.27	3,627.67
		For Steel Weather Protective Housing, Add	*5,790.58*	
		For Level 1 Steel Weather/Sound Protective Housing, Add	*10,689.37*	
		For Modular/Paralleling Unit (MD), Add	*5,247.60*	
26 32 13 13-0043	EA	200 KW, Industrial, Diesel Generator Set (Generac SD)	62,455.61	3,911.58
		For Steel Weather Protective Housing, Add	*7,261.81*	
		For Level 1 Steel Weather/Sound Protective Housing, Add	*12,160.61*	
		For Modular/Paralleling Unit (MD), Add	*5,190.08*	
26 32 13 13-0044	EA	230 KW, Industrial, Diesel Generator Set (Generac SD)	75,538.05	4,132.39
		For Steel Weather Protective Housing, Add	*7,261.81*	
		For Level 1 Steel Weather/Sound Protective Housing, Add	*19,553.21*	
		For Modular/Paralleling Unit (MD), Add	*6,390.96*	
26 32 13 13-0045	EA	250 KW, Industrial, Diesel Generator Set (Generac SD)	80,364.67	4,302.73
		For Steel Weather Protective Housing, Add	*7,261.81*	
		For Level 1 Steel Weather/Sound Protective Housing, Add	*19,553.21*	
		For Modular/Paralleling Unit (MD), Add	*6,817.12*	
26 32 13 13-0046	EA	275 KW, Industrial, Diesel Generator Set (Generac SD)	82,511.97	4,536.17
		For Steel Weather Protective Housing, Add	*11,061.90*	
		For Level 1 Steel Weather/Sound Protective Housing, Add	*23,353.30*	
		For Modular/Paralleling Unit (MD), Add	*6,976.76*	
26 32 13 13-0047	EA	300 KW, Industrial, Desel Generator Set (Generac SD)	90,463.53	4,738.05
		For Steel Weather Protective Housing, Add	*11,061.90*	
		For Level 1 Steel Weather/Sound Protective Housing, Add	*23,353.30*	
		For Modular/Paralleling Unit (MD), Add	*7,693.80*	
26 32 13 13-0048	EA	350 KW, Industrial, Diesel Generator Set (Generac SD)	98,182.68	5,299.55
		For Steel Weather Protective Housing, Add	*11,061.90*	
		For Level 1 Steel Weather/Sound Protective Housing, Add	*24,030.68*	
		For Modular/Paralleling Unit (MD), Add	*8,320.44*	
26 32 13 13-0049	EA	400 KW, Industrial, Diesel Generator Set (Generac SD)	105,485.16	5,678.10
		For Steel Weather Protective Housing, Add	*11,061.90*	
		For Level 1 Steel Weather/Sound Protective Housing, Add	*24,030.68*	
		For Modular/Paralleling Unit (MD), Add	*8,942.25*	
26 32 13 13-0050	EA	500 KW, Industrial, Diesel Generator Set (Generac SD)	117,282.71	6,662.30
		For Steel Weather Protective Housing, Add	*18,544.95*	
		For Level 1 Steel Weather/Sound Protective Housing, Add	*26,427.53*	
		For Modular/Paralleling Unit (MD), Add	*9,876.02*	
26 32 13 13-0051	EA	600 KW, Industrial, Diesel Generator Set (Generac SD)	158,180.42	7,337.36
		For Steel Weather Protective Housing, Add	*24,147.48*	
		For Level 1 Steel Weather/Sound Protective Housing, Add	*37,116.25*	
		For Modular/Paralleling Unit (MD), Add	*13,633.04*	

26 32 13 13-0052 Diesel Generator Sets (Kohler) *(26 32 13 13)*

Note: 3 Phase, 4-Wire 480/277, 416/240 or 380/220 Volt complete with radiator, fuel pump, battery charger, silencer, exhaust flex, indicating and operating controls, electronic governor. Pricing based on installation above grade on concrete pad. Includes manufacturer's representative at startup. Excludes fuel, fuel tank, utility piping, wiring, automatic transfer switch, loadbank testing and concrete pad. See CSI section 01 22 23 00-0839 for loadbank rental, 01 22 23 00-0890 for fuel reimbursement, 26 36 23 00-0000 for automatic transfer switch.

26 32 13 13-0053	EA	80 KW Diesel Generator Set, 3 Phase (Kohler 80REOZJ)	34,669.95	2,107.21
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*5,259.87*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*12,377.50*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*16,503.33*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*13,392.56*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*19,426.44*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*25,901.92*	
		For Tier 4 Diesel Generator, Add	*9,414.20*	
26 32 13 13-0054	EA	100 KW Diesel Generator Set, 3 Phase (Kohler 100REOZJ)	36,421.23	2,447.89
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*7,978.11*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*18,924.12*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*25,232.17*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*17,182.89*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*20,657.37*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*27,543.17*	
		For Tier 4 Diesel Generator, Add	*8,480.84*	
26 32 13 13-0055	EA	125 KW Diesel Generator Set, 3 Phase (Kohler 125REOZJ)	46,184.74	2,902.14
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*7,978.11*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*18,924.12*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*25,232.17*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*17,182.89*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*20,657.37*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*27,543.17*	
		For Tier 4 Diesel Generator, Add	*11,272.58*	
26 32 13 13-0056	EA	150 KW Diesel Generator Set, 3 Phase (Kohler 150REOZJ)	47,599.10	3,198.67
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*7,978.11*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*18,924.12*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*25,232.17*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*17,182.89*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*20,657.37*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*27,543.17*	
		For Tier 4 Diesel Generator, Add	*11,401.84*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 32 13 13-0057	EA	200 KW Diesel Generator Set, 3 Phase (Kohler 200REOZJ)	56,930.31	3,911.58
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*7,978.11*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*18,924.12*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*25,232.17*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*17,182.89*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*20,657.37*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*27,543.17*	
		For Tier 4 Diesel Generator, Add	*14,086.40*	
26 32 13 13-0058	EA	250 KW Diesel Generator Set, 3 Phase (Kohler 250REOZJ)	71,224.54	4,302.73
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*51,740.04*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*57,291.24*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*76,388.32*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*62,752.90*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*70,031.21*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*93,374.94*	
		For Tier 4 Diesel Generator, Add	*15,810.04*	
26 32 13 13-0059	EA	300 KW Diesel Generator Set, 3 Phase (Kohler 300REOZJ)	78,101.85	4,738.05
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*51,740.04*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*57,291.24*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*76,388.32*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*62,752.90*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*70,031.21*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*93,374.94*	
		For Tier 4 Diesel Generator, Add	*17,377.39*	
26 32 13 13-0060	EA	350 KW Diesel Generator Set, 3 Phase (Kohler 350REOZJ)	86,668.26	5,299.55
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*51,740.04*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*57,291.24*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*76,388.32*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*62,752.90*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*70,031.21*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*93,374.94*	
		For Tier 4 Diesel Generator, Add	*19,535.48*	
26 32 13 13-0061	EA	400 KW Diesel Generator Set, 3 Phase (Kohler 400REOZJ)	92,203.40	5,804.28
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*51,740.04*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*57,291.24*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*76,388.32*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*62,752.90*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*70,031.21*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*93,374.94*	
		For Tier 4 Diesel Generator, Add	*20,859.63*	
26 32 13 13-0062	EA	500 KW Diesel Generator Set, 3 Phase (Kohler 500REOZJ)	109,579.87	6,662.30
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*51,740.04*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*57,291.24*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*76,388.32*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*62,752.90*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*70,031.21*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*93,374.94*	
		For Tier 4 Diesel Generator, Add	*25,346.86*	
26 32 13 13-0063	EA	600 KW Diesel Generator Set, 3 Phase (Kohler 600REOZJ)	136,399.28	7,337.36
		For Weather Resistant Steel Diesel Generator Enclosure, Add	*105,695.41*	
		For Quietsite Level 1 Steel Diesel Generator Enclosure, Add	*127,281.97*	
		For Quietsite Level 2 Steel Diesel Generator Enclosure, Add	*169,709.29*	
		For Weather Resistant Aluminum Diesel Generator Enclosure, Add	*124,318.39*	
		For Quietsite Level 1 Aluminum Diesel Generator Enclosure, Add	*148,281.58*	
		For Quietsite Level 2 Aluminum Diesel Generator Enclosure, Add	*197,708.77*	
		For Tier 4 Diesel Generator, Add	*29,406.84*	

26 32 13 13-0064 Diesel Generator Sets (Taylor) *(26 32 13 13)*

Note: 3 Phase, 4-Wire 480/277 or 208/120 Volt complete with radiator, fuel pump, battery charger, silencer, exhaust flex, indicating and operating controls, electronic governor. Pricing based on installation above grade on concrete pad without enclosure. Includes manufacturer's representative at startup. Excludes fuel tank, enclosure, active diesel particulate filter, utility piping, wiring, automatic transfer switch, loadbank testing and concrete pad. See CSI section 01 22 23 00-0839 for loadbank rental, 26 36 23 00-0000 for automatic transfer switch.

26 32 13 13-0065	EA	9 KW Diesel Generator Set, 3 Phase (Taylor TD9)	25,327.34	756.33
26 32 13 13-0066	EA	13 KW Diesel Generator Set, 3 Phase (Taylor TD13)	26,036.35	853.11
26 32 13 13-0067	EA	20 KW Diesel Generator Set, 3 Phase (Taylor TD20)	27,248.59	952.02
26 32 13 13-0068	EA	28 KW Diesel Generator Set, 3 Phase (Taylor TD28)	30,287.91	1,067.86
26 32 13 13-0069	EA	30 KW Diesel Generator Set, 3 Phase (Taylor TD30)	31,694.40	1,126.15
26 32 13 13-0070	EA	55 KW Diesel Generator Set, 3 Phase (Taylor TD55)	35,313.53	1,681.34
26 32 13 13-0071	EA	60 KW Diesel Generator Set, 3 Phase (Taylor TD60)	38,347.71	1,798.06
26 32 13 13-0072	EA	80 KW Diesel Generator Set, 3 Phase (Taylor TD80)	41,110.57	2,107.21
26 32 13 13-0073	EA	100 KW Diesel Generator Set, 3 Phase (Taylor TD100)	42,655.11	2,447.89
26 32 13 13-0074	EA	125 KW Diesel Generator Set, 3 Phase (Taylor TD125)	57,072.82	2,902.14
26 32 13 13-0075	EA	140 KW Diesel Generator Set, 3 Phase (Taylor TD140)	57,977.96	3,050.40
26 32 13 13-0076	EA	150 KW Diesel Generator Set, 3 Phase (Taylor TD150)	58,943.83	3,198.67
26 32 13 13-0077	EA	175 KW Diesel Generator Set, 3 Phase (Taylor TD175)	62,852.46	3,570.89
26 32 13 13-0078	EA	200 KW Diesel Generator Set, 3 Phase (Taylor TD200)	65,754.69	3,911.58
26 32 13 13-0079	EA	250 KW Diesel Generator Set, 3 Phase (Taylor TD250)	80,046.25	4,302.73
26 32 13 13-0080	EA	300 KW Diesel Generator Set, 3 Phase (Taylor TD300)	90,749.32	4,738.05
26 32 13 13-0081	EA	350 KW Diesel Generator Set, 3 Phase (Taylor TD350)	99,179.41	5,299.55
26 32 13 13-0082	EA	400 KW Diesel Generator Set, 3 Phase (Taylor TD400)	101,752.54	5,804.28
26 32 13 13-0083	EA	450 KW Diesel Generator Set, 3 Phase (Taylor TD450)	109,930.45	6,252.22
26 32 13 13-0084	EA	500 KW Diesel Generator Set, 3 Phase (Taylor TD500)	115,638.87	6,662.30
26 32 13 13-0085	EA	550 KW Diesel Generator Set, 3 Phase (Taylor TD550)	118,960.26	6,999.83

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 32 13 13-0086	EA	600 KW Diesel Generator Set, 3 Phase (Taylor TD600)	146,914.50	7,337.36

26 32 13 13-0087 Diesel Particulate Filters *(26 32 13 13)*

26 32 13 13-0088	EA	Up To 50 KW Diesel Generator, Active Diesel Particulate Filter With Stainless Steel Enclosure Note: Includes 304 stainless steel housing, CARB Level 3+ Verified, and 4KW rated. Requires 480 volt, 3 phase power to a supplied 20 amp CB.	37,939.28	
26 32 13 13-0089	EA	>50 To 75 KW Diesel Generator, Active Diesel Particulate Filter With Stainless Steel Enclosure Note: Includes 304 stainless steel housing, CARB Level 3+ Verified, and 4KW rated. Requires 480 volt, 3 phase power to a supplied 20 amp CB.	49,614.29	
26 32 13 13-0090	EA	>75 To 100 KW Diesel Generator, Active Diesel Particulate Filter With Stainless Steel Enclosure Note: Includes 304 stainless steel housing, CARB Level 3+ Verified, and 4KW rated. Requires 480 volt, 3 phase power to a supplied 20 amp CB.	60,120.22	
26 32 13 13-0091	EA	>100 To 200 KW Diesel Generator, Active Diesel Particulate Filter With Stainless Steel Enclosure Note: Includes 304 stainless steel housing, CARB Level 3+ Verified, and 4KW rated. Requires 480 volt, 3 phase power to a supplied 20 amp CB.	73,757.67	
26 32 13 13-0092	EA	>200 To 500 KW Diesel Generator, Active Diesel Particulate Filter With Stainless Steel Enclosure Note: Includes 304 stainless steel housing, CARB Level 3+ Verified, and 4KW rated. Requires 480 volt, 3 phase power to a supplied 20 amp CB.	86,701.66	
26 32 13 13-0093	EA	>500 To 1,000 KW Diesel Generator, Active Diesel Particulate Filter With Stainless Steel Enclosure Note: Includes 304 stainless steel housing, CARB Level 3+ Verified, and 4KW rated. Requires 480 volt, 3 phase power to a supplied 20 amp CB.	108,318.78	

26 32 13 19 Natural Gas-Engine-Driven Generator Sets *(26 32 13)*

26 32 13 19-0001 Natural Gas Or Propane Generator Sets (Cummins) *(26 32 13 19)*

Note: 3 Phase, 4-Wire 480/277 or 208/120 Volt complete with radiator, fuel pump, battery charger, silencer, exhaust flex, indicating and operating controls, electronic governor. Pricing based on installation above grade on concrete pad without enclosure. Includes manufacturer's representative at startup. Excludes fuel, fuel tank, enclosure, utility piping, wiring, automatic transfer switch, loadbank testing and concrete pad. See CSI section 01 22 23 00-0839 for loadbank rental, 01 22 23 00-0890 for fuel reimbursement, 26 36 23 00-0000 for automatic transfer switches.

26 32 13 19-0002	EA	20 KW Natural Gas Or Propane Generator Set, 3 Phase (Cummins GGMA)	15,456.28	845.40
		For Weather Resistant Steel Natural Gas Or Propane Generator Enclosure, Add	*4,783.94*	
		For Quietsite Level 1 Steel Natural Gas Or Propane Generator Enclosure, Add	*12,377.50*	
		For Quietsite Level 2 Steel Natural Gas Or Propane Generator Enclosure, Add	*16,503.33*	
		For Weather Resistant Aluminum Natural Gas Or Propane Generator Enclosure, Add	*5,181.36*	
		For Quietsite Level 2 Aluminum Natural Gas Or Propane Generator Enclosure, Add	*8,596.36*	
26 32 13 19-0003	EA	25 KW Natural Gas Or Propane Generator Set, 3 Phase (Cummins GGMB)	17,469.58	1,009.44
		For Weather Resistant Steel Natural Gas Or Propane Generator Enclosure, Add	*4,783.94*	
		For Quietsite Level 1 Steel Natural Gas Or Propane Generator Enclosure, Add	*12,377.50*	
		For Quietsite Level 2 Steel Natural Gas Or Propane Generator Enclosure, Add	*16,503.33*	
		For Weather Resistant Aluminum Natural Gas Or Propane Generator Enclosure, Add	*5,181.36*	
		For Quietsite Level 2 Aluminum Natural Gas Or Propane Generator Enclosure, Add	*8,596.36*	
26 32 13 19-0004	EA	29 KW Natural Gas Or Propane Generator Set, 3 Phase (Cummins GGMC)	20,195.65	1,123.00
		For Weather Resistant Steel Natural Gas Or Propane Generator Enclosure, Add	*4,783.94*	
		For Quietsite Level 1 Steel Natural Gas Or Propane Generator Enclosure, Add	*12,377.50*	
		For Quietsite Level 2 Steel Natural Gas Or Propane Generator Enclosure, Add	*16,503.33*	
		For Weather Resistant Aluminum Natural Gas Or Propane Generator Enclosure, Add	*5,181.36*	
		For Quietsite Level 2 Aluminum Natural Gas Or Propane Generator Enclosure, Add	*8,596.36*	
26 32 13 19-0005	EA	35 KW Natural Gas Or Propane Generator Set, 3 Phase (Cummins GGPA)	22,936.15	1,242.87
		For Weather Resistant Steel Natural Gas Or Propane Generator Enclosure, Add	*4,783.94*	
		For Quietsite Level 1 Steel Natural Gas Or Propane Generator Enclosure, Add	*12,377.50*	
		For Quietsite Level 2 Steel Natural Gas Or Propane Generator Enclosure, Add	*16,503.33*	
		For Weather Resistant Aluminum Natural Gas Generator Enclosure, Add	*14,655.99*	
		For Quietsite Level 2 Aluminum Natural Gas Or Propane Generator Enclosure, Add	*24,599.21*	
26 32 13 19-0006	EA	40 KW Natural Gas Or Propane Generator Set, 3 Phase (Cummins GGPB)	25,765.06	1,362.74
		For Weather Resistant Steel Natural Gas Or Propane Generator Enclosure, Add	*4,783.94*	
		For Quietsite Level 1 Steel Natural Gas Or Propane Generator Enclosure, Add	*12,377.50*	
		For Quietsite Level 2 Steel Natural Gas Or Propane Generator Enclosure, Add	*16,503.33*	
		For Weather Resistant Aluminum Natural Gas Generator Enclosure, Add	*14,655.99*	
		For Quietsite Level 2 Aluminum Natural Gas Or Propane Generator Enclosure, Add	*24,599.21*	
26 32 13 19-0007	EA	45 KW Natural Gas Or Propane Generator Set, 3 Phase (Cummins GGPC)	27,937.23	1,470.00
		For Weather Resistant Steel Natural Gas Or Propane Generator Enclosure, Add	*4,783.94*	
		For Quietsite Level 1 Steel Natural Gas Or Propane Generator Enclosure, Add	*12,377.50*	
		For Quietsite Level 2 Steel Natural Gas Or Propane Generator Enclosure, Add	*16,503.33*	
		For Weather Resistant Aluminum Natural Gas Generator Enclosure, Add	*14,655.99*	
		For Quietsite Level 2 Aluminum Natural Gas Or Propane Generator Enclosure, Add	*24,599.21*	
26 32 13 19-0008	EA	60 KW Natural Gas Or Propane Generator Set, 3 Phase (Cummins GGHE)	30,551.04	1,798.06
		For Weather Resistant Steel Natural Gas Or Propane Generator Enclosure, Add	*4,783.94*	
		For Quietsite Level 1 Steel Natural Gas Or Propane Generator Enclosure, Add	*12,377.50*	
		For Quietsite Level 2 Steel Natural Gas Or Propane Generator Enclosure, Add	*16,503.33*	
		For Weather Resistant Aluminum Natural Gas Generator Enclosure, Add	*14,655.99*	
		For Quietsite Level 2 Aluminum Natural Gas Or Propane Generator Enclosure, Add	*24,599.21*	
26 32 13 19-0009	EA	70 KW Natural Gas Or Propane Generator Set, 3 Phase (Cummins GGHF)	32,780.74	2,012.56
		For Weather Resistant Steel Natural Gas Or Propane Generator Enclosure, Add	*4,783.94*	
		For Quietsite Level 1 Steel Natural Gas Or Propane Generator Enclosure, Add	*12,377.50*	
		For Quietsite Level 2 Steel Natural Gas Or Propane Generator Enclosure, Add	*16,503.33*	
		For Weather Resistant Aluminum Natural Gas Generator Enclosure, Add	*14,655.99*	
		For Quietsite Level 2 Aluminum Natural Gas Or Propane Generator Enclosure, Add	*24,599.21*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 32 13 19-0010	EA	85 KW Natural Gas Or Propane Generator Set, 3 Phase (Cummins GGHG)	43,147.98	2,151.37
		For Weather Resistant Steel Natural Gas Or Propane Generator Enclosure, Add	*8,719.01*	
		For Quietsite Level 1 Steel Natural Gas Or Propane Generator Enclosure, Add	*18,924.12*	
		For Quietsite Level 2 Steel Natural Gas Or Propane Generator Enclosure, Add	*25,232.17*	
		For Weather Resistant Aluminum Natural Gas Or Propane Generator Enclosure, Add	*17,182.89*	
		For Quietsite Level 2 Aluminum Natural Gas Or Propane Generator Enclosure, Add	*24,599.21*	
26 32 13 19-0011	EA	100 KW Natural Gas Or Propane Generator Set, 3 Phase (Cummins GGHH)	52,048.08	2,422.65
		For Weather Resistant Steel Natural Gas Or Propane Generator Enclosure, Add	*8,719.01*	
		For Quietsite Level 1 Steel Natural Gas Or Propane Generator Enclosure, Add	*18,924.12*	
		For Quietsite Level 2 Steel Natural Gas Or Propane Generator Enclosure, Add	*25,232.17*	
		For Weather Resistant Aluminum Natural Gas Or Propane Generator Enclosure, Add	*17,182.89*	
		For Quietsite Level 2 Aluminum Natural Gas Or Propane Generator Enclosure, Add	*24,599.21*	
26 32 13 19-0012	EA	125 KW Natural Gas Or Propane Generator Set, 3 Phase (Cummins GGLA)	59,576.62	2,902.14
		For Weather Resistant Steel Natural Gas Or Propane Generator Enclosure, Add	*8,719.01*	
		For Quietsite Level 1 Steel Natural Gas Or Propane Generator Enclosure, Add	*18,924.12*	
		For Quietsite Level 2 Steel Natural Gas Or Propane Generator Enclosure, Add	*25,232.17*	
		For Weather Resistant Aluminum Natural Gas Or Propane Generator Enclosure, Add	*17,182.89*	
		For Quietsite Level 2 Aluminum Natural Gas Or Propane Generator Enclosure, Add	*24,599.21*	
26 32 13 19-0013	EA	150 KW Natural Gas Or Propane Generator Set, 3 Phase (Cummins GGLB)	70,881.79	3,198.67
		For Weather Resistant Steel Natural Gas Or Propane Generator Enclosure, Add	*8,719.01*	
		For Quietsite Level 1 Steel Natural Gas Or Propane Generator Enclosure, Add	*18,924.12*	
		For Quietsite Level 2 Steel Natural Gas Or Propane Generator Enclosure, Add	*25,232.17*	
		For Weather Resistant Aluminum Natural Gas Or Propane Generator Enclosure, Add	*17,182.89*	
		For Quietsite Level 2 Aluminum Natural Gas Or Propane Generator Enclosure, Add	*24,599.21*	
26 32 13 19-0014	EA	175 KW Natural Gas Generator Set, 3 Phase (Cummins GFBA)	115,008.40	8,508.18
		For Weather Resistant Steel Natural Gas Generator Enclosure, Add	*46,529.24*	
		For Quietsite Level 1 Steel Natural Gas Generator Enclosure, Add	*51,506.37*	
		For Quietsite Level 2 Steel Natural Gas Generator Enclosure, Add	*68,675.15*	
		For Weather Resistant Aluminum Natural Gas Generator Enclosure, Add	*50,874.02*	
		For Quietsite Level 2 Aluminum Natural Gas Generator Enclosure, Add	*76,341.70*	
26 32 13 19-0015	EA	205 KW Natural Gas Generator Set, 3 Phase (Cummins GFBB)	130,618.61	3,842.18
		For Weather Resistant Steel Natural Gas Generator Enclosure, Add	*46,529.24*	
		For Quietsite Level 1 Steel Natural Gas Generator Enclosure, Add	*51,506.37*	
		For Quietsite Level 2 Steel Natural Gas Generator Enclosure, Add	*68,675.15*	
		For Weather Resistant Aluminum Natural Gas Generator Enclosure, Add	*50,874.02*	
		For Quietsite Level 2 Aluminum Natural Gas Generator Enclosure, Add	*76,341.70*	
26 32 13 19-0016	EA	250 KW Natural Gas Generator Set, 3 Phase (Cummins GFBC)	140,446.94	4,302.73
		For Weather Resistant Steel Natural Gas Generator Enclosure, Add	*46,529.24*	
		For Quietsite Level 1 Steel Natural Gas Generator Enclosure, Add	*51,506.37*	
		For Quietsite Level 2 Steel Natural Gas Generator Enclosure, Add	*68,675.15*	
		For Weather Resistant Aluminum Natural Gas Generator Enclosure, Add	*50,874.02*	
		For Quietsite Level 2 Aluminum Natural Gas Generator Enclosure, Add	*76,341.70*	
26 32 13 19-0017	EA	300 KW Natural Gas Generator Set, 3 Phase (Cummins GFEA)	181,813.69	4,738.05
		For Weather Resistant Steel Natural Gas Generator Enclosure, Add	*46,529.24*	
		For Quietsite Level 1 Steel Natural Gas Generator Enclosure, Add	*51,506.37*	
		For Quietsite Level 2 Steel Natural Gas Generator Enclosure, Add	*68,675.15*	
		For Weather Resistant Aluminum Natural Gas Generator Enclosure, Add	*50,874.02*	
		For Quietsite Level 2 Aluminum Natural Gas Generator Enclosure, Add	*76,341.70*	
26 32 13 19-0018	EA	350 KW Natural Gas Generator Set, 3 Phase (Cummins GFEB)	195,136.68	5,299.55
		For Weather Resistant Steel Natural Gas Generator Enclosure, Add	*46,529.24*	
		For Quietsite Level 1 Steel Natural Gas Generator Enclosure, Add	*51,506.37*	
		For Quietsite Level 2 Steel Natural Gas Generator Enclosure, Add	*68,675.15*	
		For Weather Resistant Aluminum Natural Gas Generator Enclosure, Add	*50,874.02*	
		For Quietsite Level 2 Aluminum Natural Gas Generator Enclosure, Add	*76,341.70*	
26 32 13 19-0019	EA	450 KW Natural Gas Generator Set, 3 Phase (Cummins GFGA)	274,406.48	6,252.22
		For Weather Resistant Steel Natural Gas Generator Enclosure, Add	*101,598.39*	
		For Quietsite Level 1 Steel Natural Gas Generator Enclosure, Add	*107,947.53*	
		For Quietsite Level 2 Steel Natural Gas Generator Enclosure, Add	*143,930.04*	
		For Weather Resistant Aluminum Natural Gas Generator Enclosure, Add	*115,398.19*	
		For Quietsite Level 2 Aluminum Natural Gas Generator Enclosure, Add	*163,097.66*	
26 32 13 19-0020	EA	500 KW Natural Gas Generator Set, 3 Phase (Cummins GFJB)	351,105.21	6,662.30
		For Weather Resistant Steel Natural Gas Generator Enclosure, Add	*101,598.39*	
		For Quietsite Level 1 Steel Natural Gas Generator Enclosure, Add	*107,947.53*	
		For Quietsite Level 2 Steel Natural Gas Generator Enclosure, Add	*143,930.04*	
		For Weather Resistant Aluminum Natural Gas Generator Enclosure, Add	*115,398.19*	
		For Quietsite Level 2 Aluminum Natural Gas Generator Enclosure, Add	*163,097.66*	
26 32 13 19-0021	EA	550 KW Natural Gas Generator Set, 3 Phase (Cummins GFJC)	392,975.69	7,021.91
		For Weather Resistant Steel Natural Gas Generator Enclosure, Add	*101,598.39*	
		For Quietsite Level 1 Steel Natural Gas Generator Enclosure, Add	*107,947.53*	
		For Quietsite Level 2 Steel Natural Gas Generator Enclosure, Add	*143,930.04*	
		For Weather Resistant Aluminum Natural Gas Generator Enclosure, Add	*115,398.19*	
		For Quietsite Level 2 Aluminum Natural Gas Generator Enclosure, Add	*163,097.66*	
26 32 13 19-0022	EA	600 KW Natural Gas Generator Set, 3 Phase (Cummins GFLA)	447,752.37	7,337.36
		For Weather Resistant Steel Natural Gas Generator Enclosure, Add	*101,598.39*	
		For Quietsite Level 1 Steel Natural Gas Generator Enclosure, Add	*107,947.53*	
		For Quietsite Level 2 Steel Natural Gas Generator Enclosure, Add	*143,930.04*	
		For Weather Resistant Aluminum Natural Gas Generator Enclosure, Add	*115,398.19*	
		For Quietsite Level 2 Aluminum Natural Gas Generator Enclosure, Add	*163,097.66*	
26 32 13 19-0023	EA	650 KW Natural Gas Generator Set, 3 Phase (Cummins GFLB)	468,193.08	7,614.96
		For Weather Resistant Steel Natural Gas Generator Enclosure, Add	*101,598.39*	
		For Quietsite Level 1 Steel Natural Gas Generator Enclosure, Add	*107,947.53*	
		For Quietsite Level 2 Steel Natural Gas Generator Enclosure, Add	*143,930.04*	
		For Weather Resistant Aluminum Natural Gas Generator Enclosure, Add	*115,398.19*	
		For Quietsite Level 2 Aluminum Natural Gas Generator Enclosure, Add	*163,097.66*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 32 13 19-0024	EA	725 KW Natural Gas Generator Set, 3 Phase (Cummins GFLC)	495,218.00	8,138.60
		For Weather Resistant Steel Natural Gas Generator Enclosure, Add	*101,598.39*	
		For Quietsite Level 1 Steel Natural Gas Generator Enclosure, Add	*107,947.53*	
		For Quietsite Level 2 Steel Natural Gas Generator Enclosure, Add	*143,930.04*	
		For Weather Resistant Aluminum Natural Gas Generator Enclosure, Add	*115,398.19*	
		For Quietsite Level 2 Aluminum Natural Gas Generator Enclosure, Add	*163,097.66*	

26 32 13 19-0025 Natural Gas Or Propane Generator Sets (Generac QTA) *(26 32 13 19)*

Note: 3 Phase, 4-Wire 480/277 or 208/120 Volt complete with radiator, fuel pump, battery charger, silencer, exhaust flex, indicating and operating controls, electronic governor. Pricing based on installation above grade on concrete pad. Includes startup and training. Excludes fuel, utility piping, wiring, automatic transfer switch, loadbank testing and concrete pad. See CSI section 01 22 23 00-0839 for loadbank rental, 01 22 23 00-0890 for fuel reimbursement, 26 36 23 00-0000 for automatic transfer switches.

26 32 13 19-0026	EA	25 KW, Commercial, Natural Gas Generator Set (Generac QTA)	17,758.00	1,009.44
		For Steel Weather Protective Housing, Add	*1,216.81*	
		For Aluminum Weather Protective Housing, Add	*1,889.63*	
26 32 13 19-0027	EA	55 KW, Commercial, Natural Gas Generator Set (Generac QTA)	26,357.92	1,684.50
		For Steel Weather Protective Housing, Add	*1,725.66*	
		For Aluminum Weather Protective Housing, Add	*2,220.51*	
26 32 13 19-0028	EA	70 KW, Commercial, Natural Gas Generator Set (Generac QTA)	29,579.43	2,012.56
		For Steel Weather Protective Housing, Add	*2,231.90*	
		For Aluminum Weather Protective Housing, Add	*2,218.56*	
26 32 13 19-0029	EA	80 KW, Commercial, Natural Gas Generator Set (Generac QTA)	31,143.63	2,107.21
		For Steel Weather Protective Housing, Add	*1,725.66*	
		For Aluminum Weather Protective Housing, Add	*2,598.25*	
26 32 13 19-0030	EA	100 KW, Commercial, Natural Gas Generator Set (Generac QTA)	38,069.39	2,422.65
		For Steel Weather Protective Housing, Add	*2,231.90*	
		For Aluminum Weather Protective Housing, Add	*2,391.32*	
26 32 13 19-0031	EA	130 KW, Commercial, Natural Gas Generator Set (Generac QTA)	43,994.65	2,889.52
		For Steel Weather Protective Housing, Add	*2,231.90*	
		For Aluminum Weather Protective Housing, Add	*1,968.69*	
26 32 13 19-0032	EA	150 KW, Commercial, Natural Gas Generator Set (Generac QTA)	49,679.61	3,198.67
		For Steel Weather Protective Housing, Add	*2,231.90*	
		For Aluminum Weather Protective Housing, Add	*1,916.96*	

26 32 13 19-0033 Natural Gas Or Propane Generator Sets (Generac SG) *(26 32 13 19)*

Note: 3 Phase, 4-Wire 480/277 or 208/120 Volt complete with radiator, fuel pump, battery charger, silencer, exhaust flex, indicating and operating controls, electronic governor. Pricing based on installation above grade on concrete pad. Includes startup and training. Excludes fuel, utility piping, wiring, automatic transfer switch, loadbank testing and concrete pad. See CSI section 01 22 23 00-0839 for loadbank rental, 01 22 23 00-0890 for fuel reimbursement, 26 36 23 00-0000 for automatic transfer switches.

26 32 13 19-0034	EA	35 KW, Industrial, Natural Gas Or Propane Generator Set (Generac SG)	20,910.64	1,242.87
		For Steel Weather Protective Housing, Add	*3,708.99*	
		For Level 2 Steel Weather/Sound Protective Housing, Add	*6,642.02*	
26 32 13 19-0035	EA	40 KW, Industrial, Natural Gas Or Propane Generator Set (Generac SG)	23,482.17	1,362.74
		For Steel Weather Protective Housing, Add	*3,708.99*	
		For Level 2 Steel Weather/Sound Protective Housing, Add	*6,642.02*	
26 32 13 19-0036	EA	45 KW, Industrial, Natural Gas Or Propane Generator Set (Generac SG)	24,442.37	1,470.00
		For Steel Weather Protective Housing, Add	*3,708.99*	
		For Level 2 Steel Weather/Sound Protective Housing, Add	*6,642.02*	
26 32 13 19-0037	EA	70 KW, Industrial, Natural Gas Generator Set (Generac SG)	32,526.78	2,012.56
		For Steel Weather Protective Housing, Add	*2,231.90*	
		For Level 2 Steel Weather/Sound Protective Housing, Add	*9,275.40*	
		For Modular/Paralleling Unit (MG), Add	*2,707.66*	
26 32 13 19-0038	EA	100 KW, Industrial, Natural Gas Generator Set (Generac SG)	38,805.98	2,422.65
		For Steel Weather Protective Housing, Add	*2,231.90*	
		For Level 2 Steel Weather/Sound Protective Housing, Add	*9,275.40*	
		For Modular/Paralleling Unit (MG), Add	*3,226.26*	
26 32 13 19-0039	EA	130 KW, Industrial, Natural Gas Generator Set (Generac SG)	46,878.55	2,889.52
		For Steel Weather Protective Housing, Add	*2,231.90*	
		For Level 2 Steel Weather/Sound Protective Housing, Add	*9,275.40*	
		For Modular/Paralleling Unit (MG), Add	*3,904.45*	
26 32 13 19-0040	EA	150 KW, Industrial, Natural Gas Generator Set (Generac SG)	78,128.21	3,198.67
		For Steel Weather Protective Housing, Add	*9,760.50*	
		For Level 2 Steel Weather/Sound Protective Housing, Add	*17,793.39*	
		For Modular/Paralleling Unit (MG), Add	*6,814.43*	
26 32 13 19-0041	EA	175 KW, Industrial, Natural Gas Generator Set (Generac SG)	86,854.81	3,570.89
		For Steel Weather Protective Housing, Add	*9,760.50*	
		For Level 2 Steel Weather/Sound Protective Housing, Add	*17,793.39*	
		For Modular/Paralleling Unit (MG), Add	*7,572.74*	
26 32 13 19-0042	EA	200 KW, Industrial, Natural Gas Generator Set (Generac SG)	91,959.65	3,911.58
		For Steel Weather Protective Housing, Add	*9,760.50*	
		For Level 2 Steel Weather/Sound Protective Housing, Add	*17,793.39*	
		For Modular/Paralleling Unit (MG), Add	*7,992.97*	
26 32 13 19-0043	EA	250 KW, Industrial, Natural Gas Generator Set (Generac SG)	132,577.48	4,302.73
		For Steel Weather Protective Housing, Add	*9,760.50*	
		For Level 2 Steel Weather/Sound Protective Housing, Add	*17,793.39*	
		For Modular/Paralleling Unit (MG), Add	*11,777.34*	
26 32 13 19-0044	EA	275 KW, Industrial, Natural Gas Generator Set (Generac SG)	135,205.33	4,536.17
		For Steel Weather Protective Housing, Add	*9,760.50*	
		For Level 2 Steel Weather/Sound Protective Housing, Add	*17,793.39*	
		For Modular/Paralleling Unit (MG), Add	*11,982.63*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 32 13 19-0045	EA	300 KW, Industrial, Natural Gas Generator Set (Generac SG)	137,894.03	4,738.05
		For Steel Weather Protective Housing, Add	*9,760.50*	
		For Level 2 Steel Weather/Sound Protective Housing, Add	*17,793.39*	
		For Modular/Paralleling Unit (MG), Add	*12,199.70*	

26 32 13 19-0046 Natural Gas Or Propane Generator Sets (Taylor) *(26 32 13 19)*

Note: 3 Phase, 4-Wire 480/277 or 208/120 Volt complete with radiator, fuel pump, battery charger, silencer, exhaust flex, indicating and operating controls, electronic governor. Pricing based on installation above grade on concrete pad without enclosure. Includes manufacturer's representative at startup. Excludes fuel tank, enclosure, utility piping, wiring, automatic transfer switch, loadbank testing and concrete pad. See CSI section 01 22 23 00-0839 for loadbank rental, 26 36 23 00-0000 for automatic transfer switches.

26 32 13 19-0047	EA	30 KW Natural Gas Or Propane Generator Set, 3 Phase (Taylor TG30)	27,579.48	1,126.15
26 32 13 19-0048	EA	40 KW Natural Gas Or Propane Generator Set, 3 Phase (Taylor TG40)	30,073.29	1,350.12
26 32 13 19-0049	EA	60 KW Natural Gas Or Propane Generator Set, 3 Phase (Taylor TG60)	31,334.91	1,798.06
26 32 13 19-0050	EA	80 KW Natural Gas Or Propane Generator Set, 3 Phase (Taylor TG80)	45,701.81	2,107.21
26 32 13 19-0051	EA	100 KW Natural Gas Or Propane Generator Set, 3 Phase (Taylor TG100)	49,473.85	2,447.89
26 32 13 19-0052	EA	125 KW Natural Gas Or Propane Generator Set, 3 Phase (Taylor TG125)	65,164.28	2,902.14
26 32 13 19-0053	EA	150 KW Natural Gas Or Propane Generator Set, 3 Phase (Taylor TG150)	68,266.93	3,198.67
26 32 13 19-0054	EA	200 KW Natural Gas Or Propane Generator Set, 3 Phase (Taylor TG200)	114,578.15	3,911.58
26 32 13 19-0055	EA	250 KW Natural Gas Or Propane Generator Set, 3 Phase (Taylor TG250)	161,386.21	4,302.73
26 32 13 19-0056	EA	350 KW Natural Gas Or Propane Generator Set, 3 Phase (Taylor TG350)	196,996.35	5,299.55
26 32 13 19-0057	EA	400 KW Natural Gas Or Propane Generator Set, 3 Phase (Taylor TG400)	235,378.06	5,804.28

26 32 13 19-0058 Natural Gas Or Propane Generator Sets (Kohler KG) *(26 32 13 19)*

Note: 3 Phase, 4-Wire 480/277 or 208/120 Volt complete with radiator, fuel pump, battery charger, silencer, exhaust flex, indicating and operating controls, electronic governor. Pricing based on installation above grade on concrete pad. Includes startup and training. Excludes fuel, utility piping, wiring, automatic transfer switch, loadbank testing and concrete pad. See CSI section 01 22 23 00-0839 for loadbank rental, 01 22 23 00-0890 for fuel reimbursement, 26 36 23 00-0000 for automatic transfer switches.

26 32 13 19-0059	EA	40 KW Natural Gas Or Propane Generator Set, 3 Phase (Kohler KG40)	23,329.45	1,362.74
		For Weather Resistant Steel Natural Gas Or Propane Generator Enclosure, Add	*4,783.94*	
		For Quietsite Level 1 Steel Natural Gas Or Propane Generator Enclosure, Add	*12,377.50*	
		For Quietsite Level 2 Steel Natural Gas Or Propane Generator Enclosure, Add	*16,503.33*	
		For Weather Resistant Aluminum Natural Gas Generator Enclosure, Add	*14,655.99*	
		For Quietsite Level 2 Aluminum Natural Gas Or Propane Generator Enclosure, Add	*24,599.21*	
26 32 13 19-0060	EA	45 KW Natural Gas Or Propane Generator Set, 3 Phase (Kohler KG45)	24,644.91	1,470.00
		For Weather Resistant Steel Natural Gas Or Propane Generator Enclosure, Add	*4,783.94*	
		For Quietsite Level 1 Steel Natural Gas Or Propane Generator Enclosure, Add	*12,377.50*	
		For Quietsite Level 2 Steel Natural Gas Or Propane Generator Enclosure, Add	*16,503.33*	
		For Weather Resistant Aluminum Natural Gas Generator Enclosure, Add	*14,655.99*	
		For Quietsite Level 2 Aluminum Natural Gas Or Propane Generator Enclosure, Add	*24,599.21*	
26 32 13 19-0061	EA	50 KW Natural Gas Or Propane Generator Set, 3 Phase (Kohler KG50)	26,560.89	1,577.25
		For Weather Resistant Steel Natural Gas Or Propane Generator Enclosure, Add	*4,783.94*	
		For Quietsite Level 1 Steel Natural Gas Or Propane Generator Enclosure, Add	*12,377.50*	
		For Quietsite Level 2 Steel Natural Gas Or Propane Generator Enclosure, Add	*16,503.33*	
		For Weather Resistant Aluminum Natural Gas Generator Enclosure, Add	*14,655.99*	
		For Quietsite Level 2 Aluminum Natural Gas Or Propane Generator Enclosure, Add	*24,599.21*	
26 32 13 19-0062	EA	60 KW Natural Gas Or Propane Generator Set, 3 Phase (Kohler KG60)	27,903.30	1,798.06
		For Weather Resistant Steel Natural Gas Or Propane Generator Enclosure, Add	*4,783.94*	
		For Quietsite Level 1 Steel Natural Gas Or Propane Generator Enclosure, Add	*12,377.50*	
		For Quietsite Level 2 Steel Natural Gas Or Propane Generator Enclosure, Add	*16,503.33*	
		For Weather Resistant Aluminum Natural Gas Generator Enclosure, Add	*14,655.99*	
		For Quietsite Level 2 Aluminum Natural Gas Or Propane Generator Enclosure, Add	*24,599.21*	
26 32 13 19-0063	EA	80 KW Natural Gas Or Propane Generator Set, 3 Phase (Kohler KG80)	33,584.22	2,151.37
		For Weather Resistant Steel Natural Gas Or Propane Generator Enclosure, Add	*8,719.01*	
		For Quietsite Level 1 Steel Natural Gas Or Propane Generator Enclosure, Add	*18,924.12*	
		For Quietsite Level 2 Steel Natural Gas Or Propane Generator Enclosure, Add	*25,232.17*	
		For Weather Resistant Aluminum Natural Gas Or Propane Generator Enclosure, Add	*17,182.89*	
		For Quietsite Level 2 Aluminum Natural Gas Or Propane Generator Enclosure, Add	*24,599.21*	
26 32 13 19-0064	EA	100 KW Natural Gas Or Propane Generator Set, 3 Phase (Kohler KG100)	37,880.04	2,422.65
		For Weather Resistant Steel Natural Gas Or Propane Generator Enclosure, Add	*8,719.01*	
		For Quietsite Level 1 Steel Natural Gas Or Propane Generator Enclosure, Add	*18,924.12*	
		For Quietsite Level 2 Steel Natural Gas Or Propane Generator Enclosure, Add	*25,232.17*	
		For Weather Resistant Aluminum Natural Gas Or Propane Generator Enclosure, Add	*17,182.89*	
		For Quietsite Level 2 Aluminum Natural Gas Or Propane Generator Enclosure, Add	*24,599.21*	
26 32 13 19-0065	EA	125 KW Natural Gas Or Propane Generator Set, 3 Phase (Kohler KG125)	42,951.59	2,902.14
		For Weather Resistant Steel Natural Gas Or Propane Generator Enclosure, Add	*8,719.01*	
		For Quietsite Level 1 Steel Natural Gas Or Propane Generator Enclosure, Add	*18,924.12*	
		For Quietsite Level 2 Steel Natural Gas Or Propane Generator Enclosure, Add	*25,232.17*	
		For Weather Resistant Aluminum Natural Gas Or Propane Generator Enclosure, Add	*17,182.89*	
		For Quietsite Level 2 Aluminum Natural Gas Or Propane Generator Enclosure, Add	*24,599.21*	
26 32 13 19-0066	EA	150 KW Natural Gas Or Propane Generator Set, 3 Phase (Kohler KG150)	51,589.61	3,198.67
		For Weather Resistant Steel Natural Gas Or Propane Generator Enclosure, Add	*8,719.01*	
		For Quietsite Level 1 Steel Natural Gas Or Propane Generator Enclosure, Add	*18,924.12*	
		For Quietsite Level 2 Steel Natural Gas Or Propane Generator Enclosure, Add	*25,232.17*	
		For Weather Resistant Aluminum Natural Gas Or Propane Generator Enclosure, Add	*17,182.89*	
		For Quietsite Level 2 Aluminum Natural Gas Or Propane Generator Enclosure, Add	*24,599.21*	
26 32 13 19-0067	EA	180 KW Natural Gas Generator Set, 3 Phase (Kohler KG180)	75,694.29	8,508.18
		For Weather Resistant Steel Natural Gas Generator Enclosure, Add	*46,529.24*	
		For Quietsite Level 1 Steel Natural Gas Generator Enclosure, Add	*51,506.37*	
		For Quietsite Level 2 Steel Natural Gas Generator Enclosure, Add	*68,675.15*	
		For Weather Resistant Aluminum Natural Gas Generator Enclosure, Add	*50,874.02*	
		For Quietsite Level 2 Aluminum Natural Gas Generator Enclosure, Add	*76,341.70*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 32 13 19-0068	EA	200 KW Natural Gas Generator Set, 3 Phase (Kohler KG200)	86,237.53	3,842.18
		For Weather Resistant Steel Natural Gas Generator Enclosure, Add	*46,529.24*	
		For Quietsite Level 1 Steel Natural Gas Generator Enclosure, Add	*51,506.37*	
		For Quietsite Level 2 Steel Natural Gas Generator Enclosure, Add	*68,675.15*	
		For Weather Resistant Aluminum Natural Gas Generator Enclosure, Add	*50,874.02*	
		For Quietsite Level 2 Aluminum Natural Gas Generator Enclosure, Add	*76,341.70*	
26 32 13 19-0069		Small Natural Gas Or Propane Air-Cooled Generator Sets *(26 32 13 19)*		
26 32 13 19-0070	EA	7.5 KW Natural Gas Or Propane Air-Cooled Generator Set Note: Includes weatherproof composite enclosure and 100 A automatic transfer switch.	5,193.33	522.62
26 32 13 19-0071	EA	10 KW Natural Gas Or Propane Air-Cooled Generator Set Note: Includes weatherproof composite enclosure and 200 A automatic transfer switch.	6,574.26	580.69
26 32 13 19-0072	EA	14 KW Natural Gas Or Propane Air-Cooled Generator Set Note: Includes weatherproof composite enclosure and 200 A automatic transfer switch.	7,592.54	638.75
26 32 29		**Rotary Converters** *(26 32)*		
26 32 29 00-0001		60 Hz AC Input 230 Or 460 Volt, 125 Volt DC Output *(26 32 29)*		
26 32 29 00-0002	EA	3 KW, 24 Amperes, 125 Volt DC, Rectifier 230 Or 460 AC To DC Conversion	10,317.44	225.60
26 32 29 00-0003	EA	5 KW, 40 Amperes, 125 Volt DC, Rectifier 230 Or 460 AC To DC Conversion	12,586.92	225.60
26 32 29 00-0004	EA	7.5 KW, 60 Amperes, 125 Volt DC, Rectifier 230 Or 460 AC To DC Conversion	16,703.36	225.60
26 32 29 00-0005	EA	10 KW, 80 Amperes, 125 Volt DC, Rectifier 230 Or 460 AC To DC Conversion	16,835.46	225.60
26 32 29 00-0006	EA	15 KW, 120 Amperes, 125 Volt DC, Rectifier 230 Or 460 AC To DC Conversion	18,675.73	282.00
26 32 29 00-0007	EA	20 KW, 160 Amperes, 125 Volt DC, Rectifier 230 Or 460 AC To DC Conversion	20,235.07	282.00
26 32 29 00-0008	EA	25 KW, 200 Amperes, 125 Volt DC, Rectifier 230 Or 460 AC To DC Conversion	21,193.98	282.00
26 32 29 00-0009	EA	40 KW, 320 Amperes, 125 Volt DC, Rectifier 230 Or 460 AC To DC Conversion	25,795.65	372.25
26 32 29 00-0010	EA	50 KW, 400 Amperes, 125 Volt DC, Rectifier 230 Or 460 AC To DC Conversion	28,686.54	372.25
26 32 29 00-0011		60 Hz AC Input, 230 Or 460 Volt, 250 Volts DC Output *(26 32 29)*		
26 32 29 00-0012	EA	3 KW, 12 Amperes, 250 Volt DC, Rectifier 230 Or 460 AC To DC Conversion	11,960.43	225.60
26 32 29 00-0013	EA	5 KW, 20 Amperes, 250 Volt DC, Rectifier 230 Or 460 AC To DC Conversion	14,279.70	225.60
26 32 29 00-0014	EA	7.5 KW, 30 Amperes, 250 Volt DC, Rectifier 230 Or 460 AC To DC Conversion	16,345.89	225.60
26 32 29 00-0015	EA	10 KW, 40 Amperes, 250 Volt DC, Rectifier 230 Or 460 AC To DC Conversion	16,801.94	225.60
26 32 29 00-0016	EA	15 KW, 60 Amperes, 250 Volt DC, Rectifier 230 Or 460 AC To DC Conversion	19,020.76	282.00
26 32 29 00-0017	EA	20 KW, 80 Amperes, 250 Volt DC, Rectifier 230 Or 460 AC To DC Conversion	20,929.61	282.00
26 32 29 00-0018	EA	25 KW, 100 Amperes, 250 Volt DC, Rectifier 230 Or 460 AC To DC Conversion	21,624.15	282.00
26 32 29 00-0019	EA	40 KW, 160 Amperes, 250 Volt DC, Rectifier 230 Or 460 AC To DC Conversion	25,692.59	372.25
26 32 29 00-0020	EA	50 KW, 200 Amperes, 250 Volt DC, Rectifier 230 Or 460 AC To DC Conversion	27,265.38	372.25
26 32 29 00-0021		460 Volt 3 Phase AC Motor Drive 250 Volt DC *(26 32 29)*		
26 32 29 00-0022	EA	33 KW, 460 Volt AC Drive Motor To 250 Volt DC, AC To DC Electrical Conversion	28,851.58	4,416.30
26 32 29 00-0023	EA	40 KW, 460 Volt AC Drive Motor To 250 Volt DC, AC To DC Electrical Conversion	31,860.83	4,416.30
26 32 29 00-0024	EA	50 KW, 460 Volt AC Drive Motor To 250 Volt DC, AC To DC Electrical Conversion	36,168.03	6,309.00
26 32 29 00-0025	EA	65 KW, 460 Volt AC Drive Motor To 250 Volt DC, AC To DC Electrical Conversion	42,363.02	6,309.00
26 32 29 00-0026	EA	85 KW, 460 Volt AC Drive Motor To 250 Volt DC, AC To DC Electrical Conversion	48,212.42	6,309.00
26 32 29 00-0027	EA	100 KW, 460 Volt AC Drive Motor To 250 Volt DC, AC To DC Electrical Conversion	56,395.73	9,463.49
26 32 29 00-0028	EA	125 KW, 460 Volt AC Drive Motor To 250 Volt DC, AC To DC Electrical Conversion	68,108.45	9,463.49
26 32 29 00-0029		4,160 Volt 3 Phase AC Motor Drive 250 Or 500 Volt DC *(26 32 29)*		
26 32 29 00-0030	EA	170 KW, 4,160 Volt AC Drive Motor - 250 Volt DC, AC To DC Electrical Conversion	100,874.28	12,617.99
26 32 29 00-0031	EA	200 KW, 4,160 Volt AC Drive Motor - 250 Volt DC, AC To DC Electrical Conversion	109,861.57	12,617.99
26 32 29 00-0032	EA	240 KW, 4,160 Volt AC Drive Motor - 250 Volt DC, AC To DC Electrical Conversion	132,243.98	16,403.38
26 32 29 00-0033	EA	320 KW, 4,160 Volt AC Drive Motor - 250 Volt DC, AC To DC Electrical Conversion	150,228.46	19,936.42
26 32 29 00-0034	EA	400 KW, 4,160 Volt AC Drive Motor - 250 Volt DC, AC To DC Electrical Conversion	178,248.51	19,936.42
26 32 29 00-0035	EA	560 KW, 4,160 Volt AC Drive Motor - 250 Volt DC, AC To DC Electrical Conversion	253,161.09	29,778.45
26 32 29 00-0036	EA	640 KW, 4,160 Volt AC Drive Motor - 250 Volt DC, AC To DC Electrical Conversion	261,402.63	29,778.45
26 32 29 00-0037	EA	800 KW, 4,160 Volt AC Drive Motor - 250 Volt DC, AC To DC Electrical Conversion	301,372.26	34,699.48
26 32 36		**Resistive Load Banks** *(26 32)* See CSI section 01 22 23 00-0839 for portable/trailer mounted resistive load bank for testing of generators, 26 32 13 00-0000 for generators.		
26 32 36 00-0001		Stationary Resistive Load Banks *(26 32 36)* Note: Controls include: Main Power On/Off switch, Blower Start/Stop push button, Master Load On/Off switch, Individual Load Step switches. Load Voltage Selector switch (dual voltage units), and Emergency Stop button. Fault condition smart indicators provide operator display and load disconnect during Air-Flow Failure, Over-temperature, Motor Overload, Load Dump, and Wrong Voltage Applied (dual voltage units). Control Power: An Integral Control Power Transformer is provided for control circuit operation. Cooling Power: Blower motor is factory-wired to the main load bus. Cooling: Integrally mounted blower motor with high-performance, direct-driven fan blade delivers the required airflow volume (CFM) for cooling resistor load elements. Motor circuits are short-circuit protected by current-limiting fuses and thermally protected by overload relay. Safety Features: Emergency-Stop push button allows the operator to take the unit off-line should a critical hard-stop condition occur. Branch circuit fuse protection provides short-circuit fault protection of all load steps eliminating the potential for catastrophic failure. Blower On, Motor Overload, Air-Flow Failure, and Over-temperature circuits disable all load steps during a fault condition with operator visual indicators. Dual Voltage units feature a Wrong Voltage Applied protection circuit which prevents the application of 480 VAC with the Load Voltage Selector switch in the 240 VAC position.		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 32 36 00-0002	EA	100 KW, NEMA 3R, Galvanized Steel Enclosure, Wall Mounted, Stationary Resistive Load Bank	11,613.61	676.80
26 32 36 00-0003	EA	150 KW, NEMA 3R, Galvanized Steel Enclosure, Wall Mounted, Stationary Resistive Load Bank	12,470.61	751.54
26 32 36 00-0004	EA	200 KW, NEMA 3R, Galvanized Steel Enclosure, Wall Mounted, Permanent Resistive Load Bank	13,248.64	778.32
26 32 36 00-0005	EA	250 KW, NEMA 3R, Galvanized Steel Enclosure, Wall Mounted, Stationary Resistive Load Bank	14,024.43	808.21
26 32 36 00-0006	EA	300 KW, NEMA 3R, Galvanized Steel Enclosure, Wall Mounted, Stationary Resistive Load Bank	15,423.41	852.21
26 32 36 00-0007	EA	400 KW, NEMA 3R, Galvanized Steel Enclosure, Wall Mounted, Stationary Resistive Load Bank	16,822.40	896.20
26 32 36 00-0008	EA	500 KW, NEMA 3R, Galvanized Steel Enclosure, Wall Mounted, Stationary Resistive Load Bank	24,408.58	954.29
26 32 36 00-0009	EA	600 KW, NEMA 3R, Galvanized Steel Enclosure, Wall Mounted, Stationary Resistive Load Bank	30,177.85	1,003.93
26 32 36 00-0010	EA	750 KW, NEMA 3R, Galvanized Steel Enclosure, Wall Mounted, Stationary Resistive Load Bank	33,298.86	1,052.43
26 32 36 00-0011	EA	800 KW, NEMA 3R, Galvanized Steel Enclosure, Wall Mounted, Stationary Resistive Load Bank	33,506.41	1,156.21
26 32 36 00-0012	EA	1,000 KW, NEMA 3R, Galvanized Steel Enclosure, Wall Mounted, Stationary Resistive Load Bank	44,203.83	1,259.42
26 32 36 00-0013	EA	1,250 KW, NEMA 3R, Galvanized Steel Enclosure, Wall Mounted, Stationary Resistive Load Bank	58,132.82	1,466.41
26 32 36 00-0014	EA	1,500 KW, NEMA 3R, Galvanized Steel Enclosure, Pad/Floor Mounted, Stationary Resistive Load Bank	71,283.84	2,299.42
26 32 36 00-0015	EA	2,000 KW, NEMA 3R, Galvanized Steel Enclosure, Pad/Floor Mounted, Stationary Resistive Load Bank	79,768.61	2,759.30
26 32 36 00-0016	EA	2,500 KW, NEMA 3R, Galvanized Steel Enclosure, Pad/Floor Mounted, Stationary Resistive Load Bank	88,433.11	2,966.56
26 32 36 00-0017	EA	3,000 KW, NEMA 3R, Galvanized Steel Enclosure, Pad/Floor Mounted, Stationary Resistive Load Bank	96,438.38	3,219.19

26 32 36 00-0018 Load Bank Docking Stations *(26 32 36)*

26 32 36 00-0019	EA	100 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Steel Enclosure, Wall Mounted, Load Bank Docking Station	6,214.82	451.20
26 32 36 00-0020	EA	200 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Steel Enclosure, Wall Mounted, Load Bank Docking Station	7,445.46	564.00
26 32 36 00-0021	EA	250 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Steel Enclosure, Wall Mounted, Load Bank Docking Station	9,205.88	676.80
26 32 36 00-0022	EA	400 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Steel Enclosure, Wall Mounted, Load Bank Docking Station	11,733.69	789.61
26 32 36 00-0023	EA	500 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Steel Enclosure, Wall Mounted, Load Bank Docking Station	12,206.48	902.41
26 32 36 00-0024	EA	600 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Steel Enclosure, Wall Mounted, Load Bank Docking Station	12,679.27	1,015.20
26 32 36 00-0025	EA	800 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Steel Enclosure, Wall Mounted, Load Bank Docking Station	15,235.09	1,128.00
26 32 36 00-0026	EA	1,000 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Steel Enclosure, Pad/Floor Mounted, Load Bank Docking Station	26,373.39	1,594.26
26 32 36 00-0027	EA	1,200 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Steel Enclosure, Pad/Floor Mounted, Load Bank Docking Station	30,020.59	1,716.89
26 32 36 00-0028	EA	1,600 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Steel Enclosure, Pad/Floor Mounted, Load Bank Docking Station	33,521.38	1,839.54
26 32 36 00-0029	EA	2,000 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Steel Enclosure, Pad/Floor Mounted, Load Bank Docking Station	40,549.01	1,962.17
26 32 36 00-0030	EA	2,400 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Steel Enclosure, Pad/Floor Mounted, Load Bank Docking Station	46,207.14	2,146.13
26 32 36 00-0031	EA	2,800 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Steel Enclosure, Pad/Floor Mounted, Load Bank Docking Station	54,171.27	2,330.07
26 32 36 00-0032	EA	3,000 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Steel Enclosure, Pad/Floor Mounted, Load Bank Docking Station	63,944.92	2,514.03
26 32 36 00-0033	EA	3,200 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Steel Enclosure, Pad/Floor Mounted, Load Bank Docking Station	65,669.30	2,697.99
26 32 36 00-0034	EA	3,600 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Steel Enclosure, Pad/Floor Mounted, Load Bank Docking Station	67,516.32	2,943.25
26 32 36 00-0035	EA	4,000 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Steel Enclosure, Pad/Floor Mounted, Load Bank Docking Station	74,789.19	3,188.53
26 32 36 00-0036	EA	100 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Stainless Steel Enclosure, Wall Mounted, Load Bank Docking Station	8,715.87	451.20
26 32 36 00-0037	EA	200 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Stainless Steel Enclosure, Wall Mounted, Load Bank Docking Station	9,820.88	564.00
26 32 36 00-0038	EA	250 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Stainless Steel Enclosure, Wall Mounted, Load Bank Docking Station	11,389.44	676.80
26 32 36 00-0039	EA	400 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Stainless Steel Enclosure, Wall Mounted, Load Bank Docking Station	13,629.46	789.61
26 32 36 00-0040	EA	500 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Stainless Steel Enclosure, Wall Mounted, Load Bank Docking Station	14,071.36	902.41
26 32 36 00-0041	EA	600 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Stainless Steel Enclosure, Wall Mounted, Load Bank Docking Station	14,513.25	1,015.20
26 32 36 00-0042	EA	800 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Stainless Steel Enclosure, Wall Mounted, Load Bank Docking Station	16,777.80	1,128.00
26 32 36 00-0043	EA	1,000 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Stainless Steel Enclosure, Pad/Floor Mounted, Load Bank Docking Station	58,711.03	1,594.26
26 32 36 00-0044	EA	1,200 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Stainless Steel Enclosure, Pad/Floor Mounted, Load Bank Docking Station	72,623.20	1,716.89
26 32 36 00-0045	EA	1,600 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Stainless Steel Enclosure, Pad/Floor Mounted, Load Bank Docking Station	74,360.59	1,839.54
26 32 36 00-0046	EA	2,000 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Stainless Steel Enclosure, Pad/Floor Mounted, Load Bank Docking Station	76,097.98	1,962.17
26 32 36 00-0047	EA	2,400 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Stainless Steel Enclosure, Pad/Floor Mounted, Load Bank Docking Station	77,958.00	2,146.13
26 32 36 00-0048	EA	2,800 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Stainless Steel Enclosure, Pad/Floor Mounted, Load Bank Docking Station	86,478.83	2,330.07
26 32 36 00-0049	EA	3,000 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Stainless Steel Enclosure, Pad/Floor Mounted, Load Bank Docking Station	88,338.84	2,514.03
26 32 36 00-0050	EA	3,200 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Stainless Steel Enclosure, Pad/Floor Mounted, Load Bank Docking Station	90,198.87	2,697.99

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 32 36 00-0051	EA	3,600 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Stainless Steel Enclosure, Pad/Floor Mounted, Load Bank Docking Station	92,181.54	2,943.25
26 32 36 00-0052	EA	4,000 AMP, 3-Pole Molded Case Breaker With Electronic Trip, NEMA 3R Stainless Steel Enclosure, Pad/Floor Mounted, Load Bank Docking Station	94,164.18	3,188.53

26 33 Battery Equipment *(26 30)*

26 33 13 Batteries *(26 33)*

26 33 13 00-0001 Standby Batteries *(26 33 13)*

26 33 13 00-0002	EA	12 Volt, 100 Ampere Hours To 10.5 Volt Capacity, 6-Cell, Valve Regulated Lead-Calcium, Standby Battery	1,263.59	28.25
26 33 13 00-0003	EA	12 Volt, 100 Ampere Hours To 10.5 Volt Capacity, 6-Cell, Valve Regulated Lead-Calcium, Standby Battery With Steel Jacket	1,365.89	28.25
26 33 13 00-0004	EA	725CCA, Group 31, 12 Volt Lead Calcium Standby Battery	363.63	28.25
26 33 13 00-0005	EA	810CCA, Group 24, 12 Volt Lead Calcium Standby Battery	329.85	28.25
26 33 13 00-0006	EA	1080CCA, Group 4D, 12 Volt Lead Calcium Standby Battery	570.71	28.25
26 33 13 00-0007	EA	1400CCA, Group 8D, 12 Volt Lead Calcium Standby Battery	664.04	28.25

26 33 43 Battery Chargers *(26 33)*

26 33 43 00-0001 Solid State Chargers, Single Phase *(26 33 43)*

Note: Includes wall bracket, 10' of DC charging cable and standard connector, 208/240/480 V.

26 33 43 00-0002	EA	Solid State Battery Charger, 6 Cell Single Phase With Wall Bracket, 208/240/480 Volt	3,417.55	644.07
26 33 43 00-0003	EA	Solid State Battery Charger, 9 Cell Single Phase With Wall Bracket, 208/240/480 Volt	4,009.22	644.07
26 33 43 00-0004	EA	Solid State Battery Charger, 12 Cell Single Phase With Wall Bracket, 208/240/480 Volt	4,416.88	644.07
26 33 43 00-0005	EA	Solid State Battery Charger, 18 Cell Single Phase With Wall Bracket, 208/240/480 Volt	4,663.47	762.58

26 33 53 Static Uninterruptible Power Supply *(26 33)*

26 33 53 00-0001 Single Phase, Uninterruptible Power Supply Systems (UPS) *(26 33 53)*

26 33 53 00-0002 Single Phase, Uninterruptible Power Supply Systems (UPS) *(26 33 53 00-0001)*

26 33 53 00-0003 120 Volt AC Output, 120 Volt AC Input, Single Phase, On-Line, Uninterruptible Power Supply (UPS) *(26 33 53 00-0002)*

Note: Rack mount or tower configuration. Includes 40 or 70 Hertz automatic frequency detection, internal automatic and manual bypass switch and self diagnostics.

26 33 53 00-0004	EA	0.5 kVA, 450 Watt, 120 Volt AC Output, 120 Volt AC Input, Single Phase, On-Line, Uninterruptible Power Supply (UPS) (Liebert® GXT3-500RT120) Note: Includes 12 minutes of battery backup at full load.	1,191.77	111.68
26 33 53 00-0005	EA	0.7 kVA, 630 Watt, 120 Volt AC Output, 120 Volt AC Input, Single Phase, On-Line, Uninterruptible Power Supply (UPS) (Liebert® GXT3-700RT120) Note: Includes 6 minutes of battery backup at full load.	1,425.03	130.28
26 33 53 00-0006	EA	1 kVA, 900 Watt, 120 Volt AC Output, 120 Volt AC Input, Single Phase, On-Line, Uninterruptible Power Supply (UPS) (Liebert® GXT3-1000RT120) Note: Includes 5 minutes of battery backup at full load.	1,761.93	148.89
26 33 53 00-0007	EA	1.5 KVA, 1,350 Watt, 120 Volt AC Output, 120 Volt AC Input, Single Phase, On-Line, Uninterruptible Power Supply (UPS) (Liebert® GXT3-1500RT120) Note: Includes 5 minutes of battery backup at full load.	2,159.08	167.51
26 33 53 00-0008	EA	2 KVA, 1,800 Watt, 120 Volt AC Output, 120 Volt AC Input, Single Phase, On-Line, Uninterruptible Power Supply (UPS) (Liebert® GXT3-2000RT120) Note: Includes 4 minutes of battery backup at full load.	2,783.98	186.12
26 33 53 00-0009	EA	3 KVA, 2,700 Watt, 120 Volt AC Output, 120 Volt AC Input, Single Phase, On-Line, Uninterruptible Power Supply (UPS) (Liebert® GXT3-3000RT120) Note: Includes 4 minutes of battery backup at full load.	4,519.45	223.34

26 33 53 00-0010 208 Volt AC Output, 208 Volt AC Input, Single Phase, On-Line, Uninterruptible Power Supply (UPS) *(26 33 53 00-0002)*

Note: Rack mount or tower configuration. Includes 40 or 70 Hertz automatic frequency detection, internal automatic and manual bypass switch and self diagnostics.

26 33 53 00-0011	EA	3 KVA, 2,700 Watt, 208 Volt AC Output, 208 Volt AC Input, Single Phase, On-Line, Uninterruptible Power Supply (UPS) (Liebert® GXT3-3000RT208) Note: Includes 4 minutes of battery backup at full load.	4,434.32	223.34

26 33 53 00-0012 120/208 Volt AC Output, 120/208 Volt AC Input, Single Phase, On-Line, Uninterruptible Power Supply (UPS) *(26 33 53 00-0002)*

Note: Rack mount or tower configuration. Includes 50 or 60 Hertz automatic frequency detection, internal automatic and manual bypass switch and self diagnostics.

26 33 53 00-0013	EA	5 KVA, 4,000 Watt, 120/208 Volt AC Output, 120/208 Volt AC Input, Single Phase, On-Line, Uninterruptible Power Supply (UPS) (Liebert® GXT3-5000RT208) Note: Includes 5 minutes of battery backup at full load.	6,862.23	297.79
26 33 53 00-0014	EA	6 KVA, 4,800 Watt, 120/208 Volt AC Output, 120/208 Volt AC Input, Single Phase, On-Line, Uninterruptible Power Supply (UPS) (Liebert® GXT3-6000RT208) Note: Includes 4 minutes of battery backup at full load.	7,499.99	335.02
26 33 53 00-0015	EA	8 KVA, 7,200 Watt, 120/208 Volt AC Output, 120/208 Volt AC Input, Single Phase, On-Line, Uninterruptible Power Supply (UPS) (Liebert® GXT3-8000RT208) Note: Includes 7 minutes of battery backup at full load.	11,257.37	409.46

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 33 53 00-0016	EA	10 KVA, 9,000 Watt, 120/208 Volt AC Output, 120/208 Volt AC Input, Single Phase, On-Line, Uninterruptible Power Supply (UPS) (Liebert® GXT3-10000RT208) Note: Includes 4-1/2 minutes of battery backup at full load.	12,951.69	446.69
26 33 53 00-0017		230 Volt AC Output, 230 Volt AC Input, Single Phase, On-Line, Uninterruptible Power Supply (UPS) *(26 33 53 00-0002)* Note: Rack mount or tower configuration. Includes 40 or 70 Hertz automatic frequency detection, internal automatic and manual bypass switch and self diagnostics.		
26 33 53 00-0018	EA	0.7 KVA, 630 Watt, 230 Volt AC Output, 230 Volt AC Input, Single Phase, On-Line, Uninterruptible Power Supply (UPS) (Liebert® GXT3-700RT230) Note: Includes 11 minutes of battery backup at full load.	1,425.03	130.28
26 33 53 00-0019	EA	1 KVA, 900 Watt, 230 Volt AC Output, 230 Volt AC Input, Single Phase, On-Line, Uninterruptible Power Supply (UPS) (Liebert® GXT3-1000RT230) Note: Includes 6 minutes of battery backup at full load.	1,761.93	148.89
26 33 53 00-0020	EA	1.5 KVA, 1,350 Watt, 230 Volt AC Output, 230 Volt AC Input, Single Phase, On-Line, Uninterruptible Power Supply (UPS) (Liebert® GXT3-1500RT230) Note: Includes 4 minutes of battery backup at full load.	2,184.23	167.51
26 33 53 00-0021	EA	2 KVA, 1,800 Watt, 230 Volt AC Output, 230 Volt AC Input, Single Phase, On-Line, Uninterruptible Power Supply (UPS) (Liebert® GXT3-2000RT230) Note: Includes 4 minutes of battery backup at full load.	2,790.05	186.12
26 33 53 00-0022	EA	3 KVA, 2,700 Watt, 230 Volt AC Output, 230 Volt AC Input, Single Phase, On-Line, Uninterruptible Power Supply (UPS) (Liebert® GXT3-3000RT230) Note: Includes 4 minutes of battery backup at full load.	4,538.34	223.34
26 33 53 00-0023	EA	5 KVA, 4,000 Watt, 230 Volt AC Output, 230 Volt AC Input, Single Phase, On-Line, Uninterruptible Power Supply (UPS) (Liebert® GXT3-5000RT230) Note: Includes 9 minutes of battery backup at full load.	6,577.94	297.79
26 33 53 00-0024	EA	6 KVA, 4,800 Watt, 230 Volt AC Output, 230 Volt AC Input, Single Phase, On-Line, Uninterruptible Power Supply (UPS) (Liebert® GXT3-6000RT230) Note: Includes 6 minutes of battery backup at full load.	8,091.04	335.02
26 33 53 00-0025	EA	10 KVA, 9,000 Watt, 230 Volt AC Output, 230 Volt AC Input, Single Phase, On-Line, Uninterruptible Power Supply (UPS) (Liebert® GXT3-10000RT230) Note: Includes 3 minutes of battery backup at full load.	12,545.30	446.69
26 33 53 00-0026		Optional Accessories For Single Phase, Uninterruptible Power Supply Systems *(26 33 53 00-0001)*		
26 33 53 00-0027	EA	External Battery Cabinet For 0.5 To 2 KVA Single Phase, Uninterruptible Power Supply Systems (Liebert® GXT3-48VBATT) Note: Rack mount or tower configuration.	814.66	33.84
26 33 53 00-0028	EA	External Battery Cabinet For 3 KVA Single Phase, Uninterruptible Power Supply Systems (Liebert® GXT3-72VBATT) Note: Rack mount or tower configuration.	1,070.38	33.84
26 33 53 00-0029	EA	External Battery Cabinet For 5 To 6 KVA Single Phase, Uninterruptible Power Supply Systems (Liebert® GXT3-144VBATT) Note: Rack mount or tower configuration.	1,041.91	33.84
26 33 53 00-0030	EA	External Battery Cabinet For 8 To 10 KVA Single Phase, Uninterruptible Power Supply Systems (Liebert® GXT3-288RTVBATT) Note: Rack mount or tower configuration.	704.50	33.84
26 33 53 00-0031	EA	Internal Replacement Battery For 5 To 6 KVA Single Phase, Uninterruptible Power Supply Systems (Liebert® GXT3-144VBATKIT)	1,004.73	111.68
26 33 53 00-0032	EA	Internal Replacement Battery For 8 To 10 KVA Single Phase, Uninterruptible Power Supply Systems (Liebert® GXT3-288RTBKIT)	1,117.53	148.89
26 33 53 00-0033		Three Phase, Uninterruptible Power Supply Systems (UPS) *(26 33 53)*		
26 33 53 00-0034		208 Volt AC Output, 120 Volt AC Input, Three Phase, On-Line, Uninterruptible Power Supply (UPS) With Internal Battery *(26 33 53 00-0033)* Note: Includes start-up, 60 Hz frequency, bypass switch and diagnostics.		
26 33 53 00-0035	EA	10 kVA, 208/120 Volt AC Output, 208-120 Volt AC Input, Three Phase, On-Line, Uninterruptible Power Supply System With Internal Battery (Emerson eXM UPS)	43,997.68	446.69
26 33 53 00-0036	EA	15 kVA, 208/120 Volt AC Output, 208-120 Volt AC Input, Three Phase, On-Line, Uninterruptible Power Supply System With Internal Battery (Emerson eXM UPS)	48,672.09	595.59
26 33 53 00-0037	EA	20 kVA, 208/120 Volt AC Output, 208-120 Volt AC Input, Three Phase, On-Line, Uninterruptible Power Supply System With Internal Battery (Emerson eXM UPS)	54,376.54	744.48
26 33 53 00-0038	EA	30 kVA, 208/120 Volt AC Output, 208-120 Volt AC Input, Three Phase, On-Line, Uninterruptible Power Supply System With Internal Battery (Emerson eXM UPS)	58,947.94	893.39
26 33 53 00-0039	EA	40 kVA, 208/120 Volt AC Output, 208-120 Volt AC Input, Three Phase, On-Line, Uninterruptible Power Supply System With Internal Battery (Emerson eXM UPS)	70,935.70	1,042.28
26 33 53 00-0040		208 Volt AC Output, 120 Volt AC Input, Three Phase, On-Line, Uninterruptible Power Supply (UPS) Without Internal Battery *(26 33 53 00-0033)* Note: Excludes Internal Battery See CSI section 26 33 53 00-0055 for batteries.		
26 33 53 00-0041	EA	60 kVA, 208/120 Volt AC Output, 208-120 Volt AC Input, Three Phase, On-Line, Uninterruptible Power Supply System Without Internal Battery (Emerson eXM UPS)	96,575.03	1,931.52
26 33 53 00-0042	EA	80 kVA, 208/120 Volt AC Output, 208-120 Volt AC Input, Three Phase, On-Line, Uninterruptible Power Supply System Without Internal Battery (Emerson eXM UPS)	104,976.22	2,391.40
26 33 53 00-0043	EA	100 kVA, 208/120 Volt AC Output, 208-120 Volt AC Input, Three Phase, On-Line, Uninterruptible Power Supply System Without Internal Battery (Emerson eXM UPS)	116,091.06	2,789.96
26 33 53 00-0044	EA	120 kVA, 208/120 Volt AC Output, 208-120 Volt AC Input, Three Phase, On-Line, Uninterruptible Power Supply System Without Internal Battery (Emerson eXM UPS)	143,382.54	3,157.87

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 33 53 00-0045	EA	140 kVA, 208/120 Volt AC Output, 208-120 Volt AC Input, Three Phase, On-Line, Uninterruptible Power Supply System Without Internal Battery (Emerson eXM UPS)	148,832.10	3,525.78
26 33 53 00-0046	EA	160 kVA, 208/120 Volt AC Output, 208-120 Volt AC Input, Three Phase, On-Line, Uninterruptible Power Supply System Without Internal Battery (Emerson eXM UPS)	154,723.01	3,893.68
26 33 53 00-0047	EA	180 kVA, 208/120 Volt AC Output, 208-120 Volt AC Input, Three Phase, On-Line, Uninterruptible Power Supply System Without Internal Battery (Emerson eXM UPS)	161,849.98	4,261.59
26 33 53 00-0048	EA	200 kVA, 208/120 Volt AC Output, 208-120 Volt AC Input, Three Phase, On-Line, Uninterruptible Power Supply System Without Internal Battery (Emerson eXM UPS)	168,976.96	4,629.49

26 33 53 00-0049 480 Volt AC Output, 480 Volt AC Input, Three Phase, On-Line, Uninterruptible Power Supply (UPS) Without Internal Battery *(26 33 53 00-0033)*

Note: Excludes Internal Battery See CSI section 26 33 53 00-0055 for batteries.

26 33 53 00-0050	EA	50 kVA, 480 Volt AC Output, 480 Volt AC Input, Three Phase, On-Line, Uninterruptible Power Supply System Without Internal Battery (Emerson eXM UPS)	90,162.91	1,594.26
26 33 53 00-0051	EA	100 kVA, 480 Volt AC Output, 480 Volt AC Input, Three Phase, On-Line, Uninterruptible Power Supply System Without Internal Battery (Emerson eXM UPS)	116,709.09	2,802.22
26 33 53 00-0052	EA	150 kVA, 480 Volt AC Output, 480 Volt AC Input, Three Phase, On-Line, Uninterruptible Power Supply System Without Internal Battery (Emerson eXM UPS)	159,580.12	3,237.58
26 33 53 00-0053	EA	200 kVA, 480 Volt AC Output, 480 Volt AC Input, Three Phase, On-Line, Uninterruptible Power Supply System Without Internal Battery (Emerson eXM UPS)	188,004.65	3,556.43
26 33 53 00-0054	EA	250 kVA, 480 Volt AC Output, 480 Volt AC Input, Three Phase, On-Line, Uninterruptible Power Supply System Without Internal Battery (Emerson eXM UPS)	219,931.35	3,924.35

26 33 53 00-0055 Optional Accessories For Three Phase, Uninterruptible Power Supply Systems *(26 33 53 00-0033)*

26 33 53 00-0056	EA	Programmable Relay Board For Three Phase Uninterruptible Power Supply Systems	718.45	56.40
26 33 53 00-0057	EA	Network Interface Card For Three Phase Uninterruptible Power Supply Systems	1,167.11	56.40
26 33 53 00-0058	EA	Remote Status Panel With 100' Of Cable For Three Phase Uninterruptible Power Supply Systems	2,203.77	112.80
26 33 53 00-0059	EA	Slim Line Distribution Panel With Two 42 Pole Panels For Three Phase Uninterruptible Power Supply Systems	6,795.87	451.20
26 33 53 00-0060	EA	12 Volt, 491 Watt, 3 Phase, 134 Ampere Hours, Battery For Uninterruptible Power Supply Systems (C&D UPS12-490MR)	668.15	56.40
26 33 53 00-0061	EA	12 Volt, 204 Watt, 3 Phase, 55 Ampere Hours, Battery For Uninterruptible Power Supply Systems (Fiamm 12FLX200)	362.54	56.40
26 33 53 00-0062	EA	12 Volt, 257 Watt, 3 Phase, 65 Ampere Hours, Battery For Uninterruptible Power Supply Systems (Fiamm 12FLX250)	407.13	56.40
26 33 53 00-0063	EA	12 Volt, 311 Watt, 3 Phase, 75 Ampere Hours, Battery For Uninterruptible Power Supply Systems (Fiamm 12FLX300)	451.73	56.40
26 33 53 00-0064	EA	12 Volt, 374 Watt, 3 Phase, 90 Ampere Hours, Battery For Uninterruptible Power Supply Systems (Fiamm 12FLX350)	532.00	56.40
26 33 53 00-0065	EA	12 Volt, 415 Watt, 3 Phase, 100 Ampere Hours, Battery For Uninterruptible Power Supply Systems (Fiamm 12FLX400)	558.76	56.40
26 33 53 00-0066	EA	12 Volt, 493 Watt, 3 Phase, 135 Ampere Hours, Battery For Uninterruptible Power Supply Systems (Fiamm 12FLX500)	697.01	56.40
26 33 53 00-0067	EA	12 Volt, 540 Watt, 3 Phase, 150 Ampere Hours, Battery For Uninterruptible Power Supply Systems (Fiamm 12FLX540)	730.45	56.40

26 33 53 00-0068 Other Uninterruptable Power Supply Equipment *(26 33 53)*

26 33 53 00-0069	EA	Uninterrupted Power Supply Slim-Line Distribution Panel 42 Pole GE Plug-In	6,555.79	103.05
26 33 53 00-0070	EA	Uninterrupted Power Supply Slim-Line Distribution Panel 84 Pole GE Plug-In	7,856.67	206.10
26 33 53 00-0071	EA	1 Pole, 15 To 60 Amperes, GE Plug-In Breakers For UPS Distribution Panel	32.07	6.19
26 33 53 00-0072	EA	2 Pole, 15 To 40 Amperes, GE Plug-In Breakers For UPS Distribution Panel	59.25	7.73
26 33 53 00-0073	EA	2 Pole, 50 To 80 Amperes, GE Plug-In Breakers For UPS Distribution Panel	113.99	7.73
26 33 53 00-0074	EA	3 Pole, 15 To 60 Amperes, GE Plug-In Breakers For UPS Distribution Panel	167.31	10.31
26 33 53 00-0075	EA	3 Pole, 70 To 100 Amperes, GE Plug-In Breakers For UPS Distribution Panel	239.56	10.31
26 33 53 00-0076	EA	Uninterrupted Power Supply Remote Status Panel	4,475.72	103.05
26 33 53 00-0077	EA	Uninterrupted Power Supply Remote Contact Board	1,468.29	77.29

26 35 Power Filters and Conditioners *(26 30)*

26 35 33 Power Factor Correction Equipment *(26 35)*

26 35 33 16 Low-Voltage Power Factor Correction Equipment *(26 35 33)*

26 35 33 16-0001 Power Factor Correction Capacitors *(26 35 33 16)*

26 35 33 16-0002	EA	Power Factor Correction Capacitors, 2.0 KVAC	1,500.01	
26 35 33 16-0003	EA	Power Factor Correction Capacitors, 3.0 KVAC	1,661.30	
26 35 33 16-0004	EA	Power Factor Correction Capacitors, 4.0 KVAC	1,822.60	
26 35 33 16-0005	EA	Power Factor Correction Capacitors, 5.0 KVAC	1,977.44	
26 35 33 16-0006	EA	Power Factor Correction Capacitors, 7.5 KVAC	2,429.05	
26 35 33 16-0007	EA	Power Factor Correction Capacitors, 10.0 KVAC	2,967.77	
26 35 33 16-0008	EA	Power Factor Correction Capacitors, 15.0 KVAC	4,583.91	
26 35 33 16-0009	EA	Power Factor Correction Capacitors, 20.0 KVAC	5,567.79	
26 35 33 16-0010	EA	Power Factor Correction Capacitors, 25.0 KVAC	7,193.61	
26 35 33 16-0011	EA	Power Factor Correction Capacitors, 30.0 KVAC	8,180.71	
26 35 33 16-0012	EA	Power Factor Correction Capacitors, 50.0 KVAC	14,354.96	
26 35 33 16-0013	EA	Power Factor Correction Capacitors, 75.0 KVAC	21,584.05	
26 35 33 16-0014	EA	Power Factor Correction Capacitors, 100.0 KVAC	28,780.89	
26 35 33 16-0015	EA	Power Factor Correction Capacitors, Fuse Kit	1,335.50	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 35 43		**Static-Frequency Converters** *(26 35)*		
26 35 43 00-0001		Rotary Phase Converter With NEMA 1 Indoor Enclosure *(26 35 43)*		
26 35 43 00-0002	EA	750 Watt Output Rotary Phase Converter With NEMA 1 Enclosure	725.94	112.80
26 35 43 00-0003	EA	2 KW Output Rotary Phase Converter With NEMA 1 Enclosure	1,277.17	135.36
26 35 43 00-0004	EA	3 KW Output Rotary Phase Converter With NEMA 1 Enclosure	1,462.50	180.48
26 35 43 00-0005	EA	5 KW Output Rotary Phase Converter With NEMA 1 Enclosure	2,012.30	225.60
26 35 43 00-0006	EA	7 KW Output Rotary Phase Converter With NEMA 1 Enclosure	2,777.36	293.28
26 35 43 00-0007	EA	11 KW Output Rotary Phase Converter With NEMA 1 Enclosure	3,594.88	360.96
26 35 43 00-0008	EA	15 KW Output Rotary Phase Converter With NEMA 1 Enclosure	4,517.35	428.64
26 35 43 00-0009	EA	21 KW Output Rotary Phase Converter With NEMA 1 Enclosure	5,522.21	485.04
26 35 43 00-0010	EA	29 KW Output Rotary Phase Converter With NEMA 1 Enclosure	6,407.40	586.57
26 35 43 00-0011	EA	36 KW Output Rotary Phase Converter With NEMA 1 Enclosure	7,341.16	659.88
26 35 43 00-0012	EA	44 KW Output Rotary Phase Converter With NEMA 1 Enclosure	8,274.91	733.20
26 35 43 00-0013	EA	55 KW Output Rotary Phase Converter With NEMA 1 Enclosure	10,284.87	885.49
26 35 43 00-0014	EA	74 KW Output Rotary Phase Converter With NEMA 1 Enclosure	13,400.72	1,065.97
26 35 43 00-0015	EA	87 KW Output Rotary Phase Converter With NEMA 1 Enclosure	17,011.63	1,297.21
26 35 43 00-0016	EA	110 KW Output Rotary Phase Converter With NEMA 1 Enclosure	19,445.57	1,517.17
26 35 43 00-0017	EA	125 KW Output Rotary Phase Converter With NEMA 1 Enclosure	25,147.62	1,692.00
26 35 43 00-0018	EA	165 KW Output Rotary Phase Converter With NEMA 1 Enclosure	38,717.33	1,917.61
26 35 43 00-0019	EA	220 KW Output Rotary Phase Converter With NEMA 1 Enclosure	58,059.18	2,143.21
26 35 53		**Voltage Regulators** *(26 35)*		
26 35 53 00-0001		Voltage Regulators, 480/277 Or 208/120 Volt, 3 Phase *(26 35 53)*		
		Note: For diesel motor generator sets mounted in switchgear cabinet.		
26 35 53 00-0002	EA	50 KVA Volt Regulator For Diesel M-G 480/277 Or 208/120 Volt, 3 Phase In Switchgear	7,157.01	1,793.53
26 35 53 00-0003	EA	75 KVA Volt Regulator For Diesel M-G 480/277 Or 208/120 Volt, 3 Phase In Switchgear	8,090.34	2,256.01
26 35 53 00-0004	EA	100 KVA Volt Regulator For Diesel M-G 480/277 Or 208/120 Volt, 3 Phase In Switchgear	8,949.78	2,684.66
26 36		**Transfer Switches** *(26 30)*		
26 36 13		**Manual Transfer Switches** *(26 36)*		
26 36 13 00-0001		Fused Manual Transfer Switches *(26 36 13)*		
26 36 13 00-0002	EA	30 Amperes, Manual Transfer Switch, Fused, 3 Pole, 480 Volt	1,413.46	197.40
26 36 13 00-0003	EA	60 Amperes, Manual Transfer Switch, Fused, 3 Pole, 480 Volt	1,641.36	245.22
26 36 13 00-0004		Non-Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure *(26 36 13)*		
26 36 13 00-0005	EA	40 Amperes, Non-Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OT40)	3,614.45	290.34
		For NEMA 3R Enclosure, Add	*1,193.86*	
		For NEMA 12 Enclosure, Add	*1,123.62*	
26 36 13 00-0006	EA	70 Amperes, Non-Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OT70)	3,993.27	348.41
		For NEMA 3R Enclosure, Add	*1,193.86*	
		For NEMA 12 Enclosure, Add	*1,123.62*	
26 36 13 00-0007	EA	125 Amperes, Non-Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OT125)	4,527.89	406.49
		For NEMA 3R Enclosure, Add	*1,193.86*	
		For NEMA 12 Enclosure, Add	*1,123.62*	
26 36 13 00-0008	EA	150 Amperes, Non-Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OT150)	5,639.02	464.55
		For NEMA 3R Enclosure, Add	*1,404.54*	
		For NEMA 12 Enclosure, Add	*1,123.62*	
26 36 13 00-0009	EA	225 Amperes, Non-Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OT225)	7,002.00	522.62
		For NEMA 3R Enclosure, Add	*1,404.54*	
		For NEMA 12 Enclosure, Add	*1,123.62*	
26 36 13 00-0010	EA	260 Amperes, Non-Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OT260)	7,875.29	580.69
		For NEMA 3R Enclosure, Add	*1,404.54*	
		For NEMA 12 Enclosure, Add	*1,123.62*	
26 36 13 00-0011	EA	300 Amperes, Non-Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OT300)	8,762.74	638.75
		For NEMA 3R Enclosure, Add	*1,657.35*	
		For NEMA 12 Enclosure, Add	*1,404.54*	
26 36 13 00-0012	EA	400 Amperes, Non-Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OT400)	10,310.77	696.83
		For NEMA 3R Enclosure, Add	*1,657.35*	
		For NEMA 12 Enclosure, Add	*1,404.54*	
26 36 13 00-0013	EA	600 Amperes, Non-Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OT600)	13,658.18	871.03
		For NEMA 3R Enclosure, Add	*1,657.35*	
		For NEMA 12 Enclosure, Add	*1,404.54*	
26 36 13 00-0014	EA	800 Amperes, Non-Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OT800)	15,338.03	1,045.24
		For NEMA 3R Enclosure, Add	*2,036.56*	
		For NEMA 12 Enclosure, Add	*1,966.35*	
26 36 13 00-0015	EA	1,000 Amperes, Non-Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OT1000)	20,498.15	1,514.16
		For NEMA 3R Enclosure, Add	*2,036.56*	
		For NEMA 12 Enclosure, Add	*1,966.35*	
26 36 23		**Automatic Transfer Switches** *(26 36)*		
26 36 23 00-0001		Automatic Transfer Switch *(26 36 23)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

26 36 23 00-0002 Automatic Transfer Switch, 2 Pole Circuit Breaker, NEMA 1 Enclosure *(26 36 23 00-0001)*

Note: Programmable, 120/240 volt single phase, 3 wire.

26 36 23 00-0003	EA	100 Amperes, Automatic Transfer Switch, 120/240 Volt, NEMA 1, 2 Pole Circuit Breaker, Programmable, 3 Wire	3,203.44	406.49
		For Level 2 Controller, Add	*185.26*	
		For Level 3 Controller, Add	*382.48*	
		For Level 4 Controller, Add	*555.79*	
26 36 23 00-0004	EA	225 Amperes, Automatic Transfer Switch, 120/240 Volt, NEMA 1, 2 Pole Circuit Breaker, Programmable, 3 Wire	4,371.14	522.62
		For Level 2 Controller, Add	*257.76*	
		For Level 3 Controller, Add	*532.14*	
		For Level 4 Controller, Add	*773.27*	
26 36 23 00-0005	EA	400 Amperes, Automatic Transfer Switch, 120/240 Volt, NEMA 1, 2 Pole Circuit Breaker, Programmable, 3 Wire	7,006.12	696.83
		For Level 2 Controller, Add	*434.97*	
		For Level 3 Controller, Add	*898.00*	
		For Level 4 Controller, Add	*1,304.90*	
26 36 23 00-0006	EA	600 Amperes, Automatic Transfer Switch, 120/240 Volt, NEMA 1, 2 Pole Circuit Breaker, Programmable, 3 Wire	11,507.80	871.03
		For Level 2 Controller, Add	*756.84*	
		For Level 3 Controller, Add	*1,562.52*	
		For Level 4 Controller, Add	*2,270.53*	

26 36 23 00-0007 Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure *(26 36 23 00-0001)*

26 36 23 00-0008	EA	40 Amperes, Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OTPC40)	5,450.67	290.34
		For Level 2 Controller, Add	*377.42*	
		For Level 3 Controller, Add	*779.20*	
		For Level 4 Controller, Add	*1,132.27*	
		For NEMA 3R Enclosure, Add	*1,193.86*	
		For NEMA 4 Enclosure, Add	*1,264.08*	
		For NEMA 12 Enclosure, Add	*1,264.08*	
26 36 23 00-0009	EA	70 Amperes, Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OTPC70)	6,286.60	348.41
		For Level 2 Controller, Add	*433.21*	
		For Level 3 Controller, Add	*894.36*	
		For Level 4 Controller, Add	*1,299.62*	
		For NEMA 3R Enclosure, Add	*1,193.86*	
		For NEMA 4 Enclosure, Add	*1,264.08*	
		For NEMA 12 Enclosure, Add	*1,264.08*	
26 36 23 00-0010	EA	100 Amperes, Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OTPC100)	6,593.18	377.45
		For Level 2 Controller, Add	*452.47*	
		For Level 3 Controller, Add	*934.13*	
		For Level 4 Controller, Add	*1,357.40*	
		For NEMA 3R Enclosure, Add	*1,193.86*	
		For NEMA 4 Enclosure, Add	*1,264.08*	
		For NEMA 12 Enclosure, Add	*1,264.08*	
26 36 23 00-0011	EA	125 Amperes, Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OTPC125)	6,899.77	406.49
		For Level 2 Controller, Add	*471.73*	
		For Level 3 Controller, Add	*973.89*	
		For Level 4 Controller, Add	*1,415.18*	
		For NEMA 3R Enclosure, Add	*1,193.86*	
		For NEMA 4 Enclosure, Add	*1,264.08*	
		For NEMA 12 Enclosure, Add	*1,264.08*	
26 36 23 00-0012	EA	150 Amperes, Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OTPC150)	8,217.31	464.55
		For Level 2 Controller, Add	*564.84*	
		For Level 3 Controller, Add	*1,166.11*	
		For Level 4 Controller, Add	*1,694.51*	
		For NEMA 3R Enclosure, Add	*1,404.54*	
		For NEMA 4 Enclosure, Add	*1,825.89*	
		For NEMA 12 Enclosure, Add	*1,264.08*	
26 36 23 00-0013	EA	225 Amperes, Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OTPC225)	9,386.77	522.62
		For Level 2 Controller, Add	*646.47*	
		For Level 3 Controller, Add	*1,334.64*	
		For Level 4 Controller, Add	*1,939.41*	
		For NEMA 3R Enclosure, Add	*1,404.54*	
		For NEMA 4 Enclosure, Add	*1,825.89*	
		For NEMA 12 Enclosure, Add	*1,264.08*	
26 36 23 00-0014	EA	260 Amperes, Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OTPC260)	10,356.63	580.69
		For Level 2 Controller, Add	*712.63*	
		For Level 3 Controller, Add	*1,471.24*	
		For Level 4 Controller, Add	*2,137.90*	
		For NEMA 3R Enclosure, Add	*1,404.54*	
		For NEMA 4 Enclosure, Add	*1,825.89*	
		For NEMA 12 Enclosure, Add	*1,264.08*	
26 36 23 00-0015	EA	300 Amperes, Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OTPC300)	10,806.27	638.75
		For Level 2 Controller, Add	*738.48*	
		For Level 3 Controller, Add	*1,524.60*	
		For Level 4 Controller, Add	*2,215.44*	
		For NEMA 3R Enclosure, Add	*1,657.35*	
		For NEMA 4 Enclosure, Add	*1,966.35*	
		For NEMA 12 Enclosure, Add	*1,404.54*	
26 36 23 00-0016	EA	400 Amperes, Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OTPC400)	12,233.26	696.83
		For Level 2 Controller, Add	*840.07*	
		For Level 3 Controller, Add	*1,734.34*	
		For Level 4 Controller, Add	*2,520.21*	
		For NEMA 3R Enclosure, Add	*1,657.35*	
		For NEMA 4 Enclosure, Add	*1,966.35*	
		For NEMA 12 Enclosure, Add	*1,404.54*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 36 23 00-0017	EA	600 Amperes, Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OTPC600)	16,805.24	871.03
		For Level 2 Controller, Add	*1,167.40*	
		For Level 3 Controller, Add	*2,410.11*	
		For Level 4 Controller, Add	*3,502.19*	
		For NEMA 3R Enclosure, Add	*1,657.35*	
		For NEMA 4 Enclosure, Add	*1,966.35*	
		For NEMA 12 Enclosure, Add	*1,404.54*	
26 36 23 00-0018	EA	800 Amperes, Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OTPC800)	18,813.45	1,045.24
		For Level 2 Controller, Add	*1,296.03*	
		For Level 3 Controller, Add	*2,675.68*	
		For Level 4 Controller, Add	*3,888.09*	
		For NEMA 3R Enclosure, Add	*2,036.56*	
		For NEMA 4 Enclosure, Add	*2,247.26*	
		For NEMA 12 Enclosure, Add	*1,966.35*	
26 36 23 00-0019	EA	1,000 Amperes, Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OTPC1000)	24,560.74	1,514.16
		For Level 2 Controller, Add	*1,668.76*	
		For Level 3 Controller, Add	*3,445.19*	
		For Level 4 Controller, Add	*5,006.29*	
		For NEMA 3R Enclosure, Add	*2,036.56*	
		For NEMA 4 Enclosure, Add	*2,247.26*	
		For NEMA 12 Enclosure, Add	*1,966.35*	
26 36 23 00-0020	EA	1,200 Amperes, Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OTPC1200)	32,013.59	1,640.34
		For Level 2 Controller, Add	*2,226.80*	
		For Level 3 Controller, Add	*4,597.27*	
		For Level 4 Controller, Add	*6,680.40*	
		For NEMA 3R Enclosure, Add	*4,494.50*	
		For NEMA 4 Enclosure, Add	*2,528.16*	
		For NEMA 12 Enclosure, Add	*2,106.80*	
26 36 23 00-0021	EA	1,600 Amperes, Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OTPC1600)	34,069.98	1,892.70
		For Level 2 Controller, Add	*2,347.05*	
		For Level 3 Controller, Add	*4,845.53*	
		For Level 4 Controller, Add	*7,041.16*	
		For NEMA 3R Enclosure, Add	*7,303.55*	
		For NEMA 4 Enclosure, Add	*8,988.98*	
		For NEMA 12 Enclosure, Add	*7,303.55*	
26 36 23 00-0022	EA	2,000 Amperes, Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OTPC2000)	38,962.83	2,145.06
		For Level 2 Controller, Add	*2,687.14*	
		For Level 3 Controller, Add	*5,547.64*	
		For Level 4 Controller, Add	*8,061.41*	
		For NEMA 3R Enclosure, Add	*7,303.55*	
		For NEMA 4 Enclosure, Add	*8,988.98*	
		For NEMA 12 Enclosure, Add	*7,303.55*	
26 36 23 00-0023	EA	3,000 Amperes, Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OTPC3000)	47,032.20	2,649.78
		For Level 2 Controller, Add	*3,234.28*	
		For Level 3 Controller, Add	*6,677.22*	
		For Level 4 Controller, Add	*9,702.84*	
		For NEMA 3R Enclosure, Add	*7,303.55*	
26 36 23 00-0024	EA	4,000 Amperes, Automatic Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OTPC4000)	82,245.99	3,154.49
		For Level 2 Controller, Add	*5,885.12*	
		For Level 3 Controller, Add	*12,149.92*	
		For Level 4 Controller, Add	*17,655.35*	
		For NEMA 3R Enclosure, Add	*13,539.65*	

26 36 23 00-0025 Bypass Isolation Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure *(26 36 23 00-0001)*

26 36 23 00-0026	EA	150 Amperes, Bypass Isolation Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins BTPC150)	26,736.06	2,206.62
		For NEMA 3R Enclosure, Add	*2,457.94*	
		For NEMA 4 Enclosure, Add	*2,528.16*	
		For NEMA 12 Enclosure, Add	*1,334.32*	
		For Level 2 Controller, Add	*1,730.02*	
		For Level 3 Controller, Add	*3,571.65*	
		For Level 4 Controller, Add	*5,190.06*	
26 36 23 00-0027	EA	225 Amperes, Bypass Isolation Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins BTPC225)	27,898.27	2,322.75
		For NEMA 3R Enclosure, Add	*2,457.94*	
		For NEMA 4 Enclosure, Add	*2,528.16*	
		For NEMA 12 Enclosure, Add	*1,334.32*	
		For Level 2 Controller, Add	*1,802.09*	
		For Level 3 Controller, Add	*3,720.44*	
		For Level 4 Controller, Add	*5,406.27*	
26 36 23 00-0028	EA	260 Amperes, Bypass Isolation Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins BTPC260)	29,243.18	2,438.88
		For NEMA 3R Enclosure, Add	*2,457.94*	
		For NEMA 4 Enclosure, Add	*2,528.16*	
		For NEMA 12 Enclosure, Add	*1,334.32*	
		For Level 2 Controller, Add	*1,888.32*	
		For Level 3 Controller, Add	*3,898.46*	
		For Level 4 Controller, Add	*5,664.96*	
26 36 23 00-0029	EA	300 Amperes, Bypass Isolation Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins BTPC300)	32,770.04	2,496.96
		For NEMA 3R Enclosure, Add	*2,457.94*	
		For NEMA 4 Enclosure, Add	*2,528.16*	
		For NEMA 12 Enclosure, Add	*1,334.32*	
		For Level 2 Controller, Add	*2,152.65*	
		For Level 3 Controller, Add	*4,444.18*	
		For Level 4 Controller, Add	*6,457.95*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 36 23 00-0030	EA	400 Amperes, Bypass Isolation Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins BTPC400)	38,012.55	2,555.03
		For NEMA 3R Enclosure, Add	*2,457.94*	
		For NEMA 4 Enclosure, Add	*2,528.16*	
		For NEMA 12 Enclosure, Add	*1,334.32*	
		For Level 2 Controller, Add	*2,549.94*	
		For Level 3 Controller, Add	*5,264.40*	
		For Level 4 Controller, Add	*7,649.83*	
26 36 23 00-0031	EA	600 Amperes, Bypass Isolation Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins BTPC600)	45,873.95	2,671.16
		For NEMA 3R Enclosure, Add	*2,457.94*	
		For NEMA 4 Enclosure, Add	*2,528.16*	
		For NEMA 12 Enclosure, Add	*1,404.54*	
		For Level 2 Controller, Add	*3,141.20*	
		For Level 3 Controller, Add	*6,485.06*	
		For Level 4 Controller, Add	*9,423.60*	
26 36 23 00-0032	EA	800 Amperes, Bypass Isolation Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins BTPC800)	50,663.92	2,787.30
		For NEMA 3R Enclosure, Add	*2,528.16*	
		For NEMA 4 Enclosure, Add	*2,528.16*	
		For NEMA 12 Enclosure, Add	*1,544.99*	
		For Level 2 Controller, Add	*3,494.42*	
		For Level 3 Controller, Add	*7,214.29*	
		For Level 4 Controller, Add	*10,483.26*	
26 36 23 00-0033	EA	1,000 Amperes, Bypass Isolation Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins BTPC1000)	63,805.93	3,251.86
		For NEMA 3R Enclosure, Add	*2,528.16*	
		For NEMA 4 Enclosure, Add	*2,528.16*	
		For NEMA 12 Enclosure, Add	*1,544.99*	
		For Level 2 Controller, Add	*4,440.92*	
		For Level 3 Controller, Add	*9,168.36*	
		For Level 4 Controller, Add	*13,322.77*	
26 36 23 00-0034	EA	1,200 Amperes, Bypass Isolation Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins BTPC1200)	84,283.13	3,785.40
		For NEMA 3R Enclosure, Add	*11,236.23*	
		For NEMA 4 Enclosure, Add	*14,045.28*	
		For NEMA 12 Enclosure, Add	*11,236.23*	
		For Level 2 Controller, Add	*5,945.21*	
		For Level 3 Controller, Add	*12,273.97*	
		For Level 4 Controller, Add	*17,835.62*	
26 36 23 00-0035	EA	1,600 Amperes, Bypass Isolation Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins BTPC1600)	110,403.34	4,037.76
		For NEMA 3R Enclosure, Add	*23,876.97*	
		For NEMA 4 Enclosure, Add	*23,876.97*	
		For NEMA 12 Enclosure, Add	*22,247.72*	
		For Level 2 Controller, Add	*7,930.41*	
		For Level 3 Controller, Add	*16,372.45*	
		For Level 4 Controller, Add	*23,791.22*	
26 36 23 00-0036	EA	2,000 Amperes, Bypass Isolation Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins BTPC2000)	125,441.92	4,416.30
		For NEMA 3R Enclosure, Add	*23,876.97*	
		For NEMA 4 Enclosure, Add	*23,876.97*	
		For NEMA 12 Enclosure, Add	*22,247.72*	
		For Level 2 Controller, Add	*9,037.22*	
		For Level 3 Controller, Add	*18,657.49*	
		For Level 4 Controller, Add	*27,111.67*	
26 36 23 00-0037	EA	3,000 Amperes, Bypass Isolation Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins BTPC3000)	201,618.35	5,047.20
		For NEMA 3R Enclosure, Add	*29,495.07*	
		For Level 2 Controller, Add	*14,843.11*	
		For Level 3 Controller, Add	*30,643.83*	
		For Level 4 Controller, Add	*44,529.32*	
26 36 23 00-0038	EA	4,000 Amperes, Bypass Isolation Transfer Switch, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins BTPC4000)	217,512.06	5,678.10
		For NEMA 3R Enclosure, Add	*29,495.07*	
		For Level 2 Controller, Add	*15,977.08*	
		For Level 3 Controller, Add	*32,984.94*	
		For Level 4 Controller, Add	*47,931.24*	

26 36 23 00-0039 Automatic Transfer Switch/Service Entrance, 3 Pole Circuit Breaker, NEMA 1 Enclosure *(26 36 23 00-0001)*

26 36 23 00-0040	EA	40 Amperes, Automatic Transfer Switch/Service Entrance, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OTPCSE40)	8,994.33	290.34
		For Level 2 Controller, Add	*652.06*	
		For Level 3 Controller, Add	*1,346.18*	
		For Level 4 Controller, Add	*1,956.17*	
		For NEMA 3R Enclosure, Add	*702.27*	
		For NEMA 12 Enclosure, Add	*1,264.08*	
26 36 23 00-0041	EA	70 Amperes, Automatic Transfer Switch/Service Entrance, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OTPCSE70)	9,707.95	348.41
		For Level 2 Controller, Add	*698.36*	
		For Level 3 Controller, Add	*1,441.78*	
		For Level 4 Controller, Add	*2,095.09*	
		For NEMA 3R Enclosure, Add	*702.27*	
		For NEMA 12 Enclosure, Add	*1,264.08*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 36 23 00-0042	EA	100 Amperes, Automatic Transfer Switch/Service Entrance, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OTPCSE100)	10,064.11	377.45
		For Level 2 Controller, Add	*721.46*	
		For Level 3 Controller, Add	*1,489.48*	
		For Level 4 Controller, Add	*2,164.39*	
		For NEMA 3R Enclosure, Add	*702.27*	
		For NEMA 12 Enclosure, Add	*1,264.08*	
26 36 23 00-0043	EA	125 Amperes, Automatic Transfer Switch/Service Entrance, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OTPCSE125)	10,420.27	406.49
		For Level 2 Controller, Add	*744.57*	
		For Level 3 Controller, Add	*1,537.17*	
		For Level 4 Controller, Add	*2,233.70*	
		For NEMA 3R Enclosure, Add	*702.27*	
		For NEMA 12 Enclosure, Add	*1,264.08*	
26 36 23 00-0044	EA	150 Amperes, Automatic Transfer Switch/Service Entrance, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OTPCSE150)	12,527.14	464.55
		For Level 2 Controller, Add	*898.85*	
		For Level 3 Controller, Add	*1,855.69*	
		For Level 4 Controller, Add	*2,696.54*	
		For Four Pole Circuit Breaker, Add	*3,511.32*	
		For NEMA 3R Enclosure, Add	*702.27*	
		For NEMA 12 Enclosure, Add	*1,264.08*	
26 36 23 00-0045	EA	225 Amperes, Automatic Transfer Switch/Service Entrance, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OTPCSE225)	16,356.92	522.62
		For Level 2 Controller, Add	*1,186.66*	
		For Level 3 Controller, Add	*2,449.87*	
		For Level 4 Controller, Add	*3,559.97*	
		For Four Pole Circuit Breaker, Add	*3,511.32*	
		For NEMA 3R Enclosure, Add	*702.27*	
		For NEMA 12 Enclosure, Add	*1,264.08*	
26 36 23 00-0046	EA	250 Amperes, Automatic Transfer Switch/Service Entrance, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OTPCSE250)	17,401.47	580.69
		For Level 2 Controller, Add	*1,258.61*	
		For Level 3 Controller, Add	*2,598.41*	
		For Level 4 Controller, Add	*3,775.82*	
		For Four Pole Circuit Breaker, Add	*3,511.32*	
		For NEMA 3R Enclosure, Add	*702.27*	
		For NEMA 12 Enclosure, Add	*1,264.08*	
26 36 23 00-0047	EA	300 Amperes, Automatic Transfer Switch/Service Entrance, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OTPCSE300)	18,077.75	638.75
		For Level 2 Controller, Add	*1,302.02*	
		For Level 3 Controller, Add	*2,688.04*	
		For Level 4 Controller, Add	*3,906.06*	
		For Four Pole Circuit Breaker, Add	*4,775.40*	
		For NEMA 3R Enclosure, Add	*1,825.89*	
		For NEMA 12 Enclosure, Add	*1,404.54*	
26 36 23 00-0048	EA	400 Amperes, Automatic Transfer Switch/Service Entrance, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OTPCSE400)	20,471.77	696.83
		For Level 2 Controller, Add	*1,478.55*	
		For Level 3 Controller, Add	*3,052.50*	
		For Level 4 Controller, Add	*4,435.66*	
		For Four Pole Circuit Breaker, Add	*4,775.40*	
		For NEMA 3R Enclosure, Add	*1,825.89*	
		For NEMA 12 Enclosure, Add	*1,404.54*	
26 36 23 00-0049	EA	600 Amperes, Automatic Transfer Switch/Service Entrance, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OTPCSE600)	24,826.14	871.03
		For Level 2 Controller, Add	*1,789.02*	
		For Level 3 Controller, Add	*3,693.45*	
		For Level 4 Controller, Add	*5,367.05*	
		For Four Pole Circuit Breaker, Add	*4,775.40*	
		For NEMA 3R Enclosure, Add	*1,825.89*	
		For NEMA 12 Enclosure, Add	*1,404.54*	
26 36 23 00-0050	EA	800 Amperes, Automatic Transfer Switch/Service Entrance, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OTPCSE800)	25,787.46	1,045.24
		For Level 2 Controller, Add	*1,836.52*	
		For Level 3 Controller, Add	*3,791.52*	
		For Level 4 Controller, Add	*5,509.55*	
		For Four Pole Circuit Breaker, Add	*6,811.96*	
		For NEMA 3R Enclosure, Add	*3,146.15*	
		For NEMA 12 Enclosure, Add	*1,966.35*	
26 36 23 00-0051	EA	1,000 Amperes, Automatic Transfer Switch/Service Entrance, 3 Pole Circuit Breaker, NEMA 1 Enclosure (Cummins OTPCSE1000)	30,587.04	1,514.16
		For Level 2 Controller, Add	*2,135.80*	
		For Level 3 Controller, Add	*4,409.40*	
		For Level 4 Controller, Add	*6,407.40*	
		For Four Pole Circuit Breaker, Add	*6,811.96*	
		For NEMA 3R Enclosure, Add	*3,146.15*	
		For NEMA 12 Enclosure, Add	*1,966.35*	

26 36 23 00-0052 Accessories *(26 36 23)*

26 36 23 00-0053	EA	Auxiliary Contacts For Automatic Transfer Switch	325.86
26 36 23 00-0054	EA	Battery Charger For Automatic Transfer Switch	2,668.61
26 36 23 00-0055	EA	Elevator Relay Signal For Automatic Transfer Switch	969.13

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

26 40 Electrical And Cathodic Protection *(26)*

26 43 Surge Protective Devices *(26 40)*

26 43 13 Surge Protective Devices for Low-Voltage Electrical Power Circuits *(26 43)*

26 43 13 00-0001		25 kA Low Exposure (14 kAIC) Transient Voltage Surge Suppression *(26 43 13)*		
		Note: Liebert LPL		
26 43 13 00-0002	EA	120/240 Volt AC Single Phase, 3 Wire 25 kA Low Exposure Transient Voltage Surge Suppressor	278.58	28.20
26 43 13 00-0003	EA	208 Volt AC Three Phase, 3 Wire 25 kA Low Exposure Transient Voltage Surge Suppressor	301.12	28.20
26 43 13 00-0004	EA	240/120 Volt AC Three Phase, 4 Wire 25 kA Low Exposure Transient Voltage Surge Suppressor	312.40	33.84
26 43 13 00-0005	EA	277 Volt AC Single Phase, 2 Wire 25 kA Low Exposure Transient Voltage Surge Suppressor	260.86	22.56
26 43 13 00-0006	EA	480/277 Volt AC Three Phase, 4 Wire 25 kA Low Exposure Transient Voltage Surge Suppressor	312.40	33.84
26 43 13 00-0007		50 kA Low Exposure (14 kAIC) Transient Voltage Surge Suppression *(26 43 13)*		
		Note: Liebert LPL		
26 43 13 00-0008	EA	120/240 Volt AC Single Phase, 3 Wire 50 kA Low Exposure Transient Voltage Surge Suppressor	389.67	28.20
26 43 13 00-0009	EA	208/120 Volt AC Three Phase, 4 Wire 50 kA Low Exposure Transient Voltage Surge Suppressor	413.83	33.84
26 43 13 00-0010	EA	208 Volt AC Three Phase, 3 Wire 50 kA Low Exposure Transient Voltage Surge Suppressor	402.55	28.20
26 43 13 00-0011	EA	480/277 Volt AC Three Phase, 4 Wire 50 kA Low Exposure Transient Voltage Surge Suppressor	413.83	33.84
26 43 13 00-0012		100 kA Low Exposure (14 kAIC) Transient Voltage Surge Suppression *(26 43 13)*		
		Note: Liebert LPL		
26 43 13 00-0013	EA	120/240 Volt AC Single Phase, 3 Wire 100 kA Low Exposure Transient Voltage Surge Suppressor	473.39	28.20
26 43 13 00-0014	EA	208/120 Volt AC Three Phase, 4 Wire 100 kA Low Exposure Transient Voltage Surge Suppressor	497.55	33.84
26 43 13 00-0015	EA	277 Volt AC Single Phase, 2 Wire 100 kA Low Exposure Transient Voltage Surge Suppressor	442.79	22.56
26 43 13 00-0016	EA	480/277 Volt AC Three Phase, 4 Wire 100 kA Low Exposure Transient Voltage Surge Suppressor	497.55	33.84
26 43 13 00-0017		100 kA Low Exposure (65 kAIC) Transient Voltage Surge Suppression *(26 43 13)*		
		Note: Liebert LPM		
26 43 13 00-0018	EA	120/240 Volt AC Single Phase, 3 Wire 100 kA Medium Exposure Transient Voltage Surge Suppressor	560.33	28.20
26 43 13 00-0019	EA	208/120 Volt AC Three Phase, 4 Wire 100 kA Medium Exposure Transient Voltage Surge Suppressor	631.18	33.84
26 43 13 00-0020	EA	277 Volt AC Three Phase, 2 Wire 100 kA Medium Exposure Transient Voltage Surge Suppressor	531.34	22.56
26 43 13 00-0021		160 kA Low Exposure (65 kAIC) Transient Voltage Surge Suppression *(26 43 13)*		
		Note: Liebert LPM		
26 43 13 00-0022	EA	208/120 Volt AC Single Phase, 4 Wire 160 kA Medium Exposure Transient Voltage Surge Suppressor	993.43	33.84
26 43 13 00-0023	EA	208 Volt AC Three Phase, 3 Wire 160 kA Medium Exposure Transient Voltage Surge Suppressor	982.15	28.20
26 43 13 00-0024	EA	480/277 Volt AC Three Phase, 4 Wire 160 kA Medium Exposure Transient Voltage Surge Suppressor	993.43	33.84
26 43 13 00-0025		250 kA, 500 Joule Transient Voltage Surge Suppression *(26 43 13)*		
		Note: Liebert Interceptor Hybrid.		
26 43 13 00-0026	EA	LED Display, 120/208 Volt AC Three Phase, 250 kA Transient Voltage Surge Suppressor	8,373.30	56.40
26 43 13 00-0027	EA	Audible Alarm/LED Display, 120/208 Volt AC Three Phase, 250 kA Transient Voltage Surge Suppressor	10,246.26	56.40
26 43 13 00-0028		Class 1310 Transient Voltage Surge Suppression *(26 43 13)*		
		Note: Supplied with audible alarm, alarm enable/disable switch and dry contacts. Square D.		
26 43 13 00-0029		NEMA 1/3R/12 Modular Device Transient Voltage Surge Suppressor *(26 43 13 00-0028)*		
		Note: Square D. EMA series.		
26 43 13 00-0030	EA	120 kA, 120/240 Volt, 1 Phase, 3 Wire NEMA 1/3R/12 Modular Device Transient Voltage Surge Suppressor	4,646.18	146.64
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0031	EA	160 kA, 120/240 Volt, 1 Phase, 3 Wire NEMA 1/3R/12 Modular Device Transient Voltage Surge Suppressor	5,122.12	169.20
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0032	EA	240 kA, 120/240 Volt, 1 Phase, 3 Wire NEMA 1/3R/12 Modular Device Transient Voltage Surge Suppressor	7,499.33	197.40
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0033	EA	320 kA, 120/240 Volt, 1 Phase, 3 Wire NEMA 1/3R/12 Modular Device Transient Voltage Surge Suppressor	9,988.47	225.60
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0034	EA	480 kA, 120/240 Volt, 1 Phase, 3 Wire NEMA 1/3R/12 Modular Device Transient Voltage Surge Suppressor	14,787.79	310.20
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0035	EA	120 kA, 120/208 Volt, 1 Phase, 4 Wire NEMA 1/3R/12 Modular Device Transient Voltage Surge Suppressor	4,850.12	146.64
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0036	EA	160 kA, 120/208 Volt, 1 Phase, 4 Wire NEMA 1/3R/12 Modular Device Transient Voltage Surge Suppressor	5,346.15	169.20
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0037	EA	240 kA, 120/208 Volt, 1 Phase, 4 Wire NEMA 1/3R/12 Modular Device Transient Voltage Surge Suppressor	7,845.45	197.40
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 43 13 00-0038	EA	320 kA, 120/208 Volt, 1 Phase, 4 Wire NEMA 1/3R/12 Modular Device Transient Voltage Surge Suppressor	10,437.98	225.60
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0039	EA	480 kA, 120/208 Volt, 1 Phase, 4 Wire NEMA 1/3R/12 Modular Device Transient Voltage Surge Suppressor	15,481.45	310.20
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0040	EA	120 kA, 120/208 Volt, 3 Phase, 4 Wire NEMA 1/3R/12 Modular Device Transient Voltage Surge Suppressor	4,850.12	146.64
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0041	EA	160 kA, 120/208 Volt, 3 Phase, 4 Wire NEMA 1/3R/12 Modular Device Transient Voltage Surge Suppressor	5,346.15	169.20
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0042	EA	240 kA, 120/208 Volt, 3 Phase, 4 Wire NEMA 1/3R/12 Modular Device Transient Voltage Surge Suppressor	7,845.39	197.40
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0043	EA	320 kA, 120/208 Volt, 3 Phase, 4 Wire NEMA 1/3R/12 Modular Device Transient Voltage Surge Suppressor	10,437.98	225.60
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0044	EA	480 kA, 120/208 Volt, 3 Phase, 4 Wire NEMA 1/3R/12 Modular Device Transient Voltage Surge Suppressor	15,481.45	310.20
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0045	EA	120 kA, 277/480 Volt, 3 Phase, 4 Wire NEMA 1/3R/12 Modular Device Transient Voltage Surge Suppressor	5,054.07	146.64
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0046	EA	160 kA, 277/480 Volt, 3 Phase, 4 Wire NEMA 1/3R/12 Modular Device Transient Voltage Surge Suppressor	5,573.07	169.20
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0047	EA	240 kA, 277/480 Volt, 3 Phase, 4 Wire NEMA 1/3R/12 Modular Device Transient Voltage Surge Suppressor	8,194.41	197.40
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0048	EA	320 kA, 277/480 Volt, 3 Phase, 4 Wire NEMA 1/3R/12 Modular Device Transient Voltage Surge Suppressor	10,890.43	225.60
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0049	EA	480 kA, 277/480 Volt, 3 Phase, 4 Wire NEMA 1/3R/12 Modular Device Transient Voltage Surge Suppressor	16,177.92	310.20
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0050	EA	120 kA, 347/600 Volt, 3 Phase, 4 Wire NEMA 1/3R/12 Modular Device Transient Voltage Surge Suppressor	5,291.03	146.64
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0051	EA	160 kA, 347/600 Volt, 3 Phase, 4 Wire NEMA 1/3R/12 Modular Device Transient Voltage Surge Suppressor	5,808.64	169.20
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0052	EA	240 kA, 347/600 Volt, 3 Phase, 4 Wire NEMA 1/3R/12 Modular Device Transient Voltage Surge Suppressor	8,559.19	197.40
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0053	EA	320 kA, 347/600 Volt, 3 Phase, 4 Wire NEMA 1/3R/12 Modular Device Transient Voltage Surge Suppressor	11,364.35	225.60
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0054	EA	480 kA, 347/600 Volt, 3 Phase, 4 Wire NEMA 1/3R/12 Modular Device Transient Voltage Surge Suppressor	15,921.52	310.20
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	

26 43 13 00-0055 NEMA 1/3R/12 Non-Modular Device Transient Voltage Surge Suppressor *(26 43 13 00-0028)*

Note: Square D EBA series.

26 43 13 00-0056	EA	120 kA, 120/240 Volt, 1 Phase, 3 Wire NEMA 1/3R/12 Non-Modular Device Transient Voltage Surge Suppressor	3,612.20	146.64
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0057	EA	160 kA, 120/240 Volt, 1 Phase, 3 Wire NEMA 1/3R/12 Non-Modular Device Transient Voltage Surge Suppressor	4,366.78	169.20
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0058	EA	240 kA, 120/240 Volt, 1 Phase, 3 Wire NEMA 1/3R/12 Non-Modular Device Transient Voltage Surge Suppressor	6,416.51	197.40
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0059	EA	120 kA, 120/208 Volt, 3 Phase, 4 Wire NEMA 1/3R/12 Non-Modular Device Transient Voltage Surge Suppressor	3,728.52	146.64
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0060	EA	160 kA, 120/208 Volt, 3 Phase, 4 Wire NEMA 1/3R/12 Non-Modular Device Transient Voltage Surge Suppressor	4,539.11	169.20
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0061	EA	240 kA, 120/208 Volt, 3 Phase, 4 Wire NEMA 1/3R/12 Non-Modular Device Transient Voltage Surge Suppressor	6,641.97	197.40
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0062	EA	120 kA, 120/240 Volt, 3 Phase, 4 Wire NEMA 1/3R/12 Non-Modular Device Transient Voltage Surge Suppressor	3,728.52	146.64
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0063	EA	160 kA, 120/240 Volt, 3 Phase, 4 Wire NEMA 1/3R/12 Non-Modular Device Transient Voltage Surge Suppressor	4,539.11	169.20
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0064	EA	240 kA, 120/240 Volt, 3 Phase, 4 Wire NEMA 1/3R/12 Non-Modular Device Transient Voltage Surge Suppressor	6,641.97	197.40
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0065	EA	120 kA, 277/480 Volt, 3 Phase, 4 Wire NEMA 1/3R/12 Non-Modular Device Transient Voltage Surge Suppressor	3,876.45	146.64
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 43 13 00-0066	EA	160 kA, 277/480 Volt, 3 Phase, 4 Wire NEMA 1/3R/12 Non-Modular Device Transient Voltage Surge Suppressor	4,724.37	169.20
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0067	EA	240 kA, 277/480 Volt, 3 Phase, 4 Wire NEMA 1/3R/12 Non-Modular Device Transient Voltage Surge Suppressor	6,930.63	197.40
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0068	EA	120 kA, 347/600 Volt, 3 Phase, 4 Wire NEMA 1/3R/12 Non-Modular Device Transient Voltage Surge Suppressor	4,031.56	146.64
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0069	EA	160 kA, 347/600 Volt, 3 Phase, 4 Wire NEMA 1/3R/12 Non-Modular Device Transient Voltage Surge Suppressor	4,921.12	169.20
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0070	EA	240 kA, 347/600 Volt, 3 Phase, 4 Wire NEMA 1/3R/12 Non-Modular Device Transient Voltage Surge Suppressor	7,233.65	197.40
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	

26 43 13 00-0071 NEMA 4X Modular Device Transient Voltage Surge Suppressor *(26 43 13 00-0028)*

Note: Square D EMA series. Stainless steel.

26 43 13 00-0072	EA	120 kA, 120/240 Volt, 1 Phase, 3 Wire NEMA 4X Modular Device Transient Voltage Surge Suppressor	6,003.31	146.64
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0073	EA	160 kA, 120/240 Volt, 1 Phase, 3 Wire NEMA 4X Modular Device Transient Voltage Surge Suppressor	6,479.26	169.20
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0074	EA	240 kA, 120/240 Volt, 1 Phase, 3 Wire NEMA 4X Modular Device Transient Voltage Surge Suppressor	8,856.46	197.40
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0075	EA	120 kA, 120/208 Volt, 3 Phase, 4 Wire NEMA 4X Modular Device Transient Voltage Surge Suppressor	6,207.25	146.64
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0076	EA	160 kA, 120/208 Volt, 3 Phase, 4 Wire NEMA 4X Modular Device Transient Voltage Surge Suppressor	6,703.29	169.20
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0077	EA	240 kA, 120/208 Volt, 3 Phase, 4 Wire NEMA 4X Modular Device Transient Voltage Surge Suppressor	9,202.58	197.40
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0078	EA	120 kA, 120/240 Volt, 3 Phase, 4 Wire NEMA 4X Modular Device Transient Voltage Surge Suppressor	6,207.25	146.64
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0079	EA	160 kA, 120/240 Volt, 3 Phase, 4 Wire NEMA 4X Modular Device Transient Voltage Surge Suppressor	6,703.29	169.20
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0080	EA	240 kA, 120/240 Volt, 3 Phase, 4 Wire NEMA 4X Modular Device Transient Voltage Surge Suppressor	9,202.52	197.40
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0081	EA	120 kA, 277/480 Volt, 3 Phase, 4 Wire NEMA 4X Modular Device Transient Voltage Surge Suppressor	6,411.20	146.64
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0082	EA	160 kA, 277/480 Volt, 3 Phase, 4 Wire NEMA 4X Modular Device Transient Voltage Surge Suppressor	6,930.20	169.20
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0083	EA	240 kA, 277/480 Volt, 3 Phase, 4 Wire NEMA 4X Modular Device Transient Voltage Surge Suppressor	9,551.55	197.40
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0084	EA	120 kA, 347/600 Volt, 3 Phase, 4 Wire NEMA 4X Modular Device Transient Voltage Surge Suppressor	6,648.16	146.64
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0085	EA	160 kA, 347/600 Volt, 3 Phase, 4 Wire NEMA 4X Modular Device Transient Voltage Surge Suppressor	7,165.78	169.20
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0086	EA	240 kA, 347/600 Volt, 3 Phase, 4 Wire NEMA 4X Modular Device Transient Voltage Surge Suppressor	9,916.33	197.40
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	

26 43 13 00-0087 NEMA 4X Non-Modular Device Transient Voltage Surge Suppressor *(26 43 13 00-0028)*

Note: Square D EBA series. Stainless steel.

26 43 13 00-0088	EA	120 kA, 120/240 Volt, 1 Phase, 3 Wire NEMA 4X Non-Modular Device Transient Voltage Surge Suppressor	4,969.33	146.64
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0089	EA	160 kA, 120/240 Volt, 1 Phase, 3 Wire NEMA 4X Non-Modular Device Transient Voltage Surge Suppressor	5,723.91	169.20
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0090	EA	240 kA, 120/240 Volt, 1 Phase, 3 Wire NEMA 4X Non-Modular Device Transient Voltage Surge Suppressor	7,773.64	197.40
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0091	EA	120 kA, 120/208 Volt, 3 Phase, 4 Wire NEMA 4X Non-Modular Device Transient Voltage Surge Suppressor	5,085.66	146.64
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0092	EA	160 kA, 120/208 Volt, 3 Phase, 4 Wire NEMA 4X Non-Modular Device Transient Voltage Surge Suppressor	5,896.24	169.20
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 43 13 00-0093	EA	240 kA, 120/208 Volt, 3 Phase, 4 Wire NEMA 4X Non-Modular Device Transient Voltage Surge Suppressor	7,999.11	197.40
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0094	EA	120 kA, 120/240 Volt, 3 Phase, 4 Wire NEMA 4X Non-Modular Device Transient Voltage Surge Suppressor	5,085.66	146.64
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0095	EA	160 kA, 120/240 Volt, 3 Phase, 4 Wire NEMA 4X Non-Modular Device Transient Voltage Surge Suppressor	5,896.24	169.20
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0096	EA	240 kA, 120/240 Volt, 3 Phase, 4 Wire NEMA 4X Non-Modular Device Transient Voltage Surge Suppressor	7,999.11	197.40
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0097	EA	120 kA, 277/480 Volt, 3 Phase, 4 Wire NEMA 4X Non-Modular Device Transient Voltage Surge Suppressor	5,233.58	146.64
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0098	EA	160 kA, 277/480 Volt, 3 Phase, 4 Wire NEMA 4X Non-Modular Device Transient Voltage Surge Suppressor	6,081.51	169.20
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0099	EA	240 kA, 277/480 Volt, 3 Phase, 4 Wire NEMA 4X Non-Modular Device Transient Voltage Surge Suppressor	8,287.76	197.40
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0100	EA	120 kA, 347/600 Volt, 3 Phase, 4 Wire NEMA 4X Non-Modular Device Transient Voltage Surge Suppressor	5,388.69	146.64
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0101	EA	160 kA, 347/600 Volt, 3 Phase, 4 Wire NEMA 4X Non-Modular Device Transient Voltage Surge Suppressor	6,278.25	169.20
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	
26 43 13 00-0102	EA	240 kA, 347/600 Volt, 3 Phase, 4 Wire NEMA 4X Non-Modular Device Transient Voltage Surge Suppressor	8,590.78	197.40
		For Integral Disconnect, Add	*265.68*	
		For Surge Counter, Add	*203.04*	

26 43 23 Surge Protective Devices for Lightning Protection *(26 43)*

26 43 23 00-0001 Surge And Lightning Arrestors *(26 43 23)*

26 43 23 00-0002 Metal Top Intermediate Type IMX *(26 43 23 00-0001)*

Note: For outdoor construction, single phase.

26 43 23 00-0003	EA	3 KV, Lightning Arrestors, IMX, Metal Top For Outdoor Use, 1 Phase	1,147.93	259.95
26 43 23 00-0004	EA	4.5 KV, Lightning Arrestors, IMX, Metal Top For Outdoor Use, 1 Phase	1,245.62	259.95
26 43 23 00-0005	EA	6 KV, Lightning Arrestors, IMX, Metal Top For Outdoor Use, 1 Phase	1,245.62	259.95
26 43 23 00-0006	EA	7.5 KV, Lightning Arrestors, IMX, Metal Top For Outdoor Use, 1 Phase	1,427.05	259.95
26 43 23 00-0007	EA	9 KV, Lightning Arrestors, IMX, Metal Top For Outdoor Use, 1 Phase	1,427.05	259.95
26 43 23 00-0008	EA	10 KV, Lightning Arrestors, IMX, Metal Top For Outdoor Use, 1 Phase	1,577.77	259.95
26 43 23 00-0009	EA	12 KV, Lightning Arrestors, IMX, Metal Top For Outdoor Use, 1 Phase	1,577.77	259.95
26 43 23 00-0010	EA	15 KV, Lightning Arrestors, IMX, Metal Top For Outdoor Use, 1 Phase	2,154.34	324.93
26 43 23 00-0011	EA	18 KV, Lightning Arrestors, IMX, Metal Top For Outdoor Use, 1 Phase	2,232.49	324.93
26 43 23 00-0012	EA	21 KV, Lightning Arrestors, IMX, Metal Top For Outdoor Use, 1 Phase	2,451.35	389.92
26 43 23 00-0013	EA	24 KV, Lightning Arrestors, IMX, Metal Top For Outdoor Use, 1 Phase	2,652.32	389.92
26 43 23 00-0014	EA	27 KV, Lightning Arrestors, IMX, Metal Top For Outdoor Use, 1 Phase	3,157.53	389.92

26 43 23 00-0015 Porcelain Top Intermediate Type IMX *(26 43 23 00-0001)*

Note: For cubicle mounting, single phase.

26 43 23 00-0016	EA	3 KV, Lightning Arrestors, IMX, Porcelain Top For Cubicle Mounting, 1 Phase	1,147.93	259.95
26 43 23 00-0017	EA	4.5 KV, Lightning Arrestors, IMX, Porcelain Top For Cubicle Mounting, 1 Phase	1,245.62	259.95
26 43 23 00-0018	EA	6 KV, Lightning Arrestors, IMX, Porcelain Top For Cubicle Mounting, 1 Phase	1,245.62	259.95
26 43 23 00-0019	EA	7.5 KV, Lightning Arrestors, IMX, Porcelain Top For Cubicle Mounting, 1 Phase	1,427.05	259.95
26 43 23 00-0020	EA	9 KV, Lightning Arrestors, IMX, Porcelain Top For Cubicle Mounting, 1 Phase	1,427.05	259.95
26 43 23 00-0021	EA	10 KV, Lightning Arrestors, IMX, Porcelain Top For Cubicle Mounting, 1 Phase	1,577.77	259.95
26 43 23 00-0022	EA	12 KV, Lightning Arrestors, IMX, Porcelain Top For Cubicle Mounting, 1 Phase	1,577.77	259.95
26 43 23 00-0023	EA	15 KV, Lightning Arrestors, IMX, Porcelain Top For Cubicle Mounting, 1 Phase	2,154.34	324.93
26 43 23 00-0024	EA	18 KV, Lightning Arrestors, IMX, Porcelain Top For Cubicle Mounting, 1 Phase	2,232.49	324.93
26 43 23 00-0025	EA	21 KV, Lightning Arrestors, IMX, Porcelain Top For Cubicle Mounting, 1 Phase	2,451.35	389.92
26 43 23 00-0026	EA	24 KV, Lightning Arrestors, IMX, Porcelain Top For Cubicle Mounting, 1 Phase	2,652.32	389.92
26 43 23 00-0027	EA	27 KV, Lightning Arrestors, IMX, Porcelain Top For Cubicle Mounting, 1 Phase	3,157.53	389.92

26 43 23 00-0028 IMX Accessories *(26 43 23 00-0001)*

26 43 23 00-0029	EA	1 Crossarm Bracket Reversible 3-27 KV IMX	946.96	259.95
26 43 23 00-0030	EA	Single Unit Horizontal Pole Mounted Bracket (IMX)	935.79	259.95
26 43 23 00-0031	EA	3 Unit Horizontal Pole Mounted Bracket (IMX)	852.17	259.95

26 43 23 00-0032 Lightning Arrestor And Cutouts *(26 43 23 00-0001)*

26 43 23 00-0033	EA	3 KV La Distribution Class, Lightning Arrestor	634.34	259.95
26 43 23 00-0034	EA	3 KV La Interior Class, Lightning Arrestor	1,222.28	259.95
26 43 23 00-0035	EA	3 KV La Station Class, Lightning Arrestor	1,147.93	259.95
26 43 23 00-0036	EA	9 KV La Distribution Class, Lightning Arrestor	695.75	259.95
26 43 23 00-0037	EA	9 KV La Interior Class, Lightning Arrestor	1,385.07	259.95
26 43 23 00-0038	EA	9 KV La Station Class, Lightning Arrestor	1,427.05	259.95
26 43 23 00-0039	EA	5 KV Enclosed Fused Cutout	791.21	259.95
26 43 23 00-0040	EA	15 KV Open Fused Cutout	853.63	324.93

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 43 23 00-0041	EA	18 KV La Distribution Class, Lightning Arrestor	663.44	259.95
26 43 23 00-0042	EA	18 KV La Interior Class, Lightning Arrestor	1,472.08	259.95

26 50 Lighting *(26)*

Note: Includes testing of fixture, a set of lamps (light bulbs), wire nuts, ground wire connector, fixture whip, ballast(s), mounting brackets where necessary and cable connectors. Lay-in fixtures include support wire, clips and seismic supports.

26 51 Interior Lighting *(26 50)*

26 51 13 Incandescent Interior Lighting *(26 51)*

26 51 13 00-0001 Recessed Fixtures *(26 51 13)*

Note: Housing and trim priced separately.

26 51 13 00-0002 Incandescent, Recessed Fixture Housings *(26 51 13 00-0001)*

26 51 13 00-0003	EA	4" Round, Incandescent, T Or ICT Recessed Fixture Housing	82.77	32.26
		For ICAT Housing, Add	*4.42*	
26 51 13 00-0004	EA	5" Round, Incandescent, T Or ICT Recessed Fixture Housing	82.77	32.26
		For ICAT Housing, Add	*4.42*	
26 51 13 00-0005	EA	6" Round, Incandescent, T Or ICT Recessed Fixture Housing	87.98	33.84
		For ICAT Housing, Add	*4.80*	
26 51 13 00-0006	EA	7" Round, Incandescent, T Or ICT Recessed Fixture Housing	93.38	35.30
		For ICAT Housing, Add	*5.21*	
26 51 13 00-0007	EA	8" Round, Incandescent, T Or ICT Recessed Fixture Housing	98.80	36.78
		For ICAT Housing, Add	*5.62*	
26 51 13 00-0008	EA	10" To 12" Square, Incandescent, T Or ICT Recessed Fixture Housing	100.36	39.03
		For ICAT Housing, Add	*5.38*	

26 51 13 00-0009 Recessed Fixture Trim *(26 51 13 00-0001)*

26 51 13 00-0010	EA	Circular, Recessed Fixture Trim	66.09	15.79
26 51 13 00-0011	EA	Circular Clear Lens, Recessed Fixture Trim	73.85	15.79
26 51 13 00-0012	EA	Open/Baffle, Recessed Fixture Trim	87.32	15.79
26 51 13 00-0013	EA	Specular Reflector, Recessed Fixture Trim	94.44	15.79
26 51 13 00-0014	EA	Eyeball, Recessed Fixture Trim	73.97	15.79
26 51 13 00-0015	EA	10" To 12" Square, Clear Lens, Recessed Fixture Trim	69.80	15.79
26 51 13 00-0016	EA	10" To 12" Square, Drop Dish, Recessed Fixture Trim	74.58	15.79

26 51 13 00-0017 Track Lighting *(26 51 13)*

26 51 13 00-0018 Incandescent Track Lighting Fixtures *(26 51 13 00-0017)*

See CSI section 26 51 19 00-0855 for track lighting tracks.

26 51 13 00-0019	EA	Incandescent Track Lighting Fixture, 120 Volt	85.83	18.83
26 51 13 00-0020	EA	Par 20 Track Fixture, White Or Black Finish, 120 Volt	62.67	18.83
26 51 13 00-0021	EA	Par 30 Track Fixture, White Or Black Finish, 120 Volt	89.28	18.83
26 51 13 00-0022	EA	Par 38 Track Fixture, White Or Black Finish, 120 Volt	91.92	18.83
26 51 13 00-0023	EA	PAR 16, Baffled Cylinder Track Fixture, White or Black Finish, 120 Volt	74.71	18.83
26 51 13 00-0024	EA	PAR 20, Baffled Cylinder Track Fixture, White or Black Finish, 120 Volt	62.67	18.83
26 51 13 00-0025	EA	PAR 30, Baffled Cylinder Track Fixture, White or Black Finish, 120 Volt Note: 120V.	73.45	18.83
26 51 13 00-0026	EA	PAR 38, Baffled Cylinder Track Fixture, White or Black Finish, 120 Volt	94.56	18.83

26 51 13 00-0027 Wet Location, Dust Resistant, Vapor Tight Fixtures *(26 51 13)*

26 51 13 00-0028 Incandescent, Wet Location, Dust Resistant, Cast Metal Guard, Enclosed And Gasketed, Vapor Tight Fixtures *(26 51 13 00-0027)*

26 51 13 00-0029	EA	100 Watt Incandescent, Ceiling Mounted, Cast Metal Guard, Enclosed And Gasketed, Vapor Tight Fixture	127.83	45.12
		For Wall Mounted, Add	*5.10*	
26 51 13 00-0030	EA	200 Watt Incandescent, Ceiling Mounted, Cast Metal Guard, Enclosed And Gasketed, Vapor Tight Fixture	146.82	45.12
		For Wall Mounted, Add	*5.10*	

26 51 16 Fluorescent Interior Lighting *(26 51)*

26 51 16 00-0001 Fluorescent Fixtures *(26 51 16)*

26 51 16 00-0002 Surface Mounted, Wraparound Fluorescent Fixtures *(26 51 16 00-0001)*

26 51 16 00-0003 6" x 2', Surface Mounted, Wraparound Fluorescent Fixtures *(26 51 16 00-0002)*

26 51 16 00-0004	EA	1 T8 Lamp, 6" x 2', Surface Mounted, Wraparound Fluorescent Fixture	191.66	32.26
26 51 16 00-0005	EA	2 T8 Lamps, 6" x 2', Surface Mounted, Wraparound Fluorescent Fixture	216.56	32.26

26 51 16 00-0006 6" x 4', Surface Mounted, Wraparound Fluorescent Fixtures *(26 51 16 00-0002)*

26 51 16 00-0007	EA	1 T8 Lamp, 6" x 4', Surface Mounted, Wraparound Fluorescent Fixture	217.33	33.59
26 51 16 00-0008	EA	2 T8 Lamps, 6" x 4', Surface Mounted, Wraparound Fluorescent Fixture	244.65	33.59

26 51 16 00-0009 1' x 4', Surface Mounted, Wraparound Fluorescent Fixtures *(26 51 16 00-0002)*

26 51 16 00-0010	EA	2 T8 Lamps, 1' x 4', Surface Mounted, Wraparound Fluorescent Fixture	260.20	37.71

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 16 00-0011	EA	3 T8 Lamps, 1' x 4', Surface Mounted, Wraparound Fluorescent Fixture	310.87	37.71
26 51 16 00-0012	EA	4 T8 Lamps, 1' x 4', Surface Mounted, Wraparound Fluorescent Fixture	366.61	37.71
26 51 16 00-0013		2' x 2', Surface Mounted, Wraparound Fluorescent Fixtures *(26 51 16 00-0002)*		
26 51 16 00-0014	EA	2 T8 Lamps, 2' x 2', Surface Mounted, Wraparound Fluorescent Fixture	208.99	41.22
26 51 16 00-0015	EA	3 T8 Lamps, 2' x 2', Surface Mounted, Wraparound Fluorescent Fixture	243.59	41.22
26 51 16 00-0016		2' x 4', Surface Mounted, Wraparound Fluorescent Fixtures *(26 51 16 00-0002)*		
26 51 16 00-0017	EA	2 T8 Lamps, 2' x 4', Surface Mounted, Wraparound Fluorescent Fixture	332.95	48.02
26 51 16 00-0018	EA	3 T8 Lamps, 2' x 4', Surface Mounted, Wraparound Fluorescent Fixture	359.59	48.02
26 51 16 00-0019	EA	4 T8 Lamps, 2' x 4', Surface Mounted, Wraparound Fluorescent Fixture	410.19	48.02
26 51 16 00-0020		Surface Mounted, Box Type Fluorescent Fixtures *(26 51 16 00-0001)*		
		Note: Includes prismatic lens.		
26 51 16 00-0021		1' x 4', Surface Mounted, Box Type Fluorescent Fixtures *(26 51 16 00-0020)*		
26 51 16 00-0022	EA	2 T8 Lamps, 1' x 4', Surface Mounted, Box Type Fluorescent Fixture	258.70	37.41
26 51 16 00-0023	EA	3 T8 Lamps, 1' x 4', Surface Mounted, Box Type Fluorescent Fixture	427.42	37.41
26 51 16 00-0024	EA	4 T8 Lamps, 1' x 4', Surface Mounted, Box Type Fluorescent Fixture	489.20	37.41
26 51 16 00-0025		2' x 2', Surface Mounted, Box Type Fluorescent Fixtures *(26 51 16 00-0020)*		
26 51 16 00-0026	EA	2 T8 Lamps, 2' x 2', Surface Mounted, Box Type Fluorescent Fixture	409.45	41.22
26 51 16 00-0027	EA	3 T8 Lamps, 2' x 2', Surface Mounted, Box Type Fluorescent Fixture	448.43	41.22
26 51 16 00-0028	EA	4 T8 Lamps, 2' x 2', Surface Mounted, Box Type Fluorescent Fixture	476.57	41.22
26 51 16 00-0029		2' x 4', Surface Mounted, Box Type Fluorescent Fixtures *(26 51 16 00-0020)*		
26 51 16 00-0030	EA	2 T8 Lamps, 2' x 4', Surface Mounted, Box Type Fluorescent Fixture	413.63	48.02
26 51 16 00-0031	EA	3 T8 Lamps, 2' x 4', Surface Mounted, Box Type Fluorescent Fixture	455.23	48.02
26 51 16 00-0032	EA	4 T8 Lamps, 2' x 4', Surface Mounted, Box Type Fluorescent Fixture	478.20	48.02
26 51 16 00-0033	EA	6 T8 Lamps, 2' x 4', Surface Mounted, Box Type Fluorescent Fixture	513.23	48.02
26 51 16 00-0034		4' x 4', Surface Mounted, Box Type Fluorescent Fixtures *(26 51 16 00-0020)*		
26 51 16 00-0035	EA	4 T8 Lamps, 4' x 4', Surface Mounted, Box Type Fluorescent Fixture	830.34	61.83
26 51 16 00-0036	EA	6 T8 Lamps, 4' x 4', Surface Mounted, Box Type Fluorescent Fixture	844.58	61.83
26 51 16 00-0037	EA	8 T8 Lamps, 4' x 4', Surface Mounted, Box Type Fluorescent Fixture	802.44	61.83
26 51 16 00-0038		Recessed Fluorescent Fixtures *(26 51 16 00-0001)*		
26 51 16 00-0039		Lensed, Lay-In/Troffer, Recessed Fluorescent Fixtures *(26 51 16 00-0038)*		
26 51 16 00-0040		1' x 2', Prismatic Lensed, Lay-In/Troffer Fluorescent Fixture *(26 51 16 00-0039)*		
26 51 16 00-0041	EA	2 T8 Lamps, 1' x 2', Prismatic Lensed, Lay-In/Troffer Fluorescent Fixture	413.84	32.26
		For Drywall Or Plaster Ceilings, Add	*21.79*	
26 51 16 00-0042		1' x 4', Prismatic Lensed, Lay-In/Troffer Fluorescent Fixture *(26 51 16 00-0039)*		
26 51 16 00-0043	EA	2 T8 Lamps, 1' x 4', Prismatic Lensed, Lay-In/Troffer Fluorescent Fixture	550.76	37.41
		For Drywall Or Plaster Ceilings, Add	*25.51*	
26 51 16 00-0044	EA	2 T5 Lamps, 1' x 4', Prismatic Lensed, Lay-In/Troffer Fluorescent Fixture	1,047.69	37.41
		For Drywall Or Plaster Ceilings, Add	*25.51*	
26 51 16 00-0045		2' x 2', Prismatic Lensed, Lay-In/Troffer Fluorescent Fixture *(26 51 16 00-0039)*		
26 51 16 00-0046	EA	2 T8 Lamps, 2' x 2', Prismatic Lensed, Lay-In/Troffer Fluorescent Fixture	555.90	41.22
		For Drywall Or Plaster Ceilings, Add	*27.82*	
26 51 16 00-0047	EA	3 T8 Lamps, 2' x 2', Prismatic Lensed, Lay-In/Troffer Fluorescent Fixture	643.57	41.22
		For Drywall Or Plaster Ceilings, Add	*27.82*	
26 51 16 00-0048	EA	4 T8 Lamps, 2' x 2', Prismatic Lensed, Lay-In/Troffer Fluorescent Fixture	649.63	41.22
		For Drywall Or Plaster Ceilings, Add	*27.83*	
26 51 16 00-0049	EA	2 T5 Lamps, 2' x 2', Prismatic Lensed, Lay-In/Troffer Fluorescent Fixture	702.23	41.22
		For Drywall Or Plaster Ceilings, Add	*27.82*	
26 51 16 00-0050		2' x 4', Prismatic Lensed, Lay-In/Troffer Fluorescent Fixture *(26 51 16 00-0039)*		
26 51 16 00-0051	EA	2 T8 Lamps, 2' x 4', Prismatic Lensed, Lay-In/Troffer Fluorescent Fixture	526.96	48.02
		For Drywall Or Plaster Ceilings, Add	*32.46*	
26 51 16 00-0052	EA	3 T8 Lamps, 2' x 4', Prismatic Lensed, Lay-In/Troffer Fluorescent Fixture	760.94	48.02
		For Drywall Or Plaster Ceilings, Add	*32.46*	
26 51 16 00-0053	EA	4 T8 Lamps, 2' x 4', Prismatic Lensed, Lay-In/Troffer Fluorescent Fixture	768.06	48.02
		For Drywall Or Plaster Ceilings, Add	*32.46*	
26 51 16 00-0054	EA	6 T8 Lamps, 2' x 4', Prismatic Lensed, Lay-In/Troffer Fluorescent Fixture	860.82	48.02
		For Drywall Or Plaster Ceilings, Add	*32.46*	
26 51 16 00-0055	EA	2 T5 Lamps, 2' x 4', Prismatic Lensed, Lay-In/Troffer Fluorescent Fixture	729.21	48.02
		For Drywall Or Plaster Ceilings, Add	*32.46*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 16 00-0056	EA	3 T5 Lamps, 2' x 4', Prismatic Lensed, Lay-In/Troffer Fluorescent Fixture	1,022.50	48.02
		For Drywall Or Plaster Ceilings, Add	*32.46*	
26 51 16 00-0057	EA	4 T5 Lamps, 2' x 4', Prismatic Lensed, Lay-In/Troffer Fluorescent Fixture	1,039.31	48.02
		For Drywall Or Plaster Ceilings, Add	*32.46*	

26 51 16 00-0058 Parabolic, Lay-In/Troffer, Recessed Fluorescent Fixtures *(26 51 16 00-0038)*

26 51 16 00-0059 1' x 2', Parabolic, Lay-In/Troffer, Recessed Fluorescent Fixtures *(26 51 16 00-0058)*

26 51 16 00-0060	EA	1 T8 Lamp, 1' x 2', Parabolic, Lay-In/Troffer, Recessed Fluorescent Fixture	495.06	32.26
		For Drywall Or Plaster Ceilings, Add	*21.79*	
26 51 16 00-0061	EA	2 T8 Lamps, 1' x 2', Parabolic, Lay-In/Troffer, Recessed Fluorescent Fixture	501.10	32.26
		For Drywall Or Plaster Ceilings, Add	*21.79*	
26 51 16 00-0062	EA	3 T8 Lamps, 1' x 2', Parabolic, Lay-In/Troffer, Recessed Fluorescent Fixture	594.40	32.26
		For Drywall Or Plaster Ceilings, Add	*21.79*	

26 51 16 00-0063 1' x 4', Parabolic, Lay-In/Troffer, Recessed Fluorescent Fixtures *(26 51 16 00-0058)*

26 51 16 00-0064	EA	1 T8 Lamp, 1' x 4', Parabolic, Lay-In/Troffer, Recessed Fluorescent Fixture	563.58	37.41
		For Drywall Or Plaster Ceilings, Add	*25.51*	
26 51 16 00-0065	EA	2 T8 Lamps, 1' x 4', Parabolic, Lay-In/Troffer, Recessed Fluorescent Fixture	570.70	37.41
		For Drywall Or Plaster Ceilings, Add	*25.51*	
26 51 16 00-0066	EA	3 T8 Lamps, 1' x 4', Parabolic, Lay-In/Troffer, Recessed Fluorescent Fixture	649.50	37.41
		For Drywall Or Plaster Ceilings, Add	*25.51*	

26 51 16 00-0067 2' x 2', Parabolic, Lay-In/Troffer, Recessed Fluorescent Fixtures *(26 51 16 00-0058)*

26 51 16 00-0068	EA	2 T8 Lamps, 2' x 2', Parabolic, Lay-In/Troffer, Recessed Fluorescent Fixture	574.85	41.22
		For Drywall Or Plaster Ceilings, Add	*27.83*	
26 51 16 00-0069	EA	3 T8 Lamps, 2' x 2', Parabolic, Lay-In/Troffer, Recessed Fluorescent Fixture	580.89	41.22
		For Drywall Or Plaster Ceilings, Add	*27.83*	
26 51 16 00-0070	EA	4 T8 Lamps, 2' x 2', Parabolic, Lay-In/Troffer, Recessed Fluorescent Fixture	672.75	41.22
		For Drywall Or Plaster Ceilings, Add	*27.83*	

26 51 16 00-0071 2' x 4', Parabolic, Lay-In/Troffer, Recessed Fluorescent Fixtures *(26 51 16 00-0058)*

26 51 16 00-0072	EA	2 T8 Lamps, 2' x 4', Parabolic, Lay-In/Troffer, Recessed Fluorescent Fixture	526.96	48.02
		For Drywall Or Plaster Ceilings, Add	*32.46*	
26 51 16 00-0073	EA	3 T8 Lamps, 2' x 4', Parabolic, Lay-In/Troffer, Recessed Fluorescent Fixture	626.04	48.02
		For Drywall Or Plaster Ceilings, Add	*32.46*	
26 51 16 00-0074	EA	4 T8 Lamps, 2' x 4', Parabolic, Lay-In/Troffer, Recessed Fluorescent Fixture	720.07	48.02
		For Drywall Or Plaster Ceilings, Add	*32.46*	
26 51 16 00-0075	EA	6 T8 Lamps, 2' x 4', Parabolic, Lay-In/Troffer, Recessed Fluorescent Fixture	821.56	48.02
		For Drywall Or Plaster Ceilings, Add	*32.46*	

26 51 16 00-0076 Direct-Indirect, Recessed Fluorescent Fixtures *(26 51 16 00-0038)*

26 51 16 00-0077 1' x 4', Direct-Indirect, Recessed Fluorescent Fixtures *(26 51 16 00-0076)*

26 51 16 00-0078	EA	1 T8 Lamp, 1' x 4', Direct-Indirect, Recessed Fluorescent Fixture	1,110.82	37.41
		For Drywall Or Plaster Ceilings, Add	*25.51*	
26 51 16 00-0079	EA	2 T8 Lamps, 1' x 4', Direct-Indirect, Recessed Fluorescent Fixture	1,117.93	37.41
		For Drywall Or Plaster Ceilings, Add	*25.51*	
26 51 16 00-0080	EA	1 T5 Lamp, 1' x 4', Direct-Indirect, Recessed Fluorescent Fixture	1,326.88	37.41
		For Drywall Or Plaster Ceilings, Add	*25.51*	
26 51 16 00-0081	EA	2 T5 Lamps, 1' x 4', Direct-Indirect, Recessed Fluorescent Fixture	1,343.70	37.41
		For Drywall Or Plaster Ceilings, Add	*25.51*	

26 51 16 00-0082 2' x 2', Direct-Indirect, Recessed Fluorescent Fixtures *(26 51 16 00-0076)*

26 51 16 00-0083	EA	2 T8 Lamps, 2' x 2', Direct-Indirect, Recessed Fluorescent Fixture	863.53	41.22
		For Drywall Or Plaster Ceilings, Add	*27.82*	
26 51 16 00-0084	EA	3 T8 Lamps, 2' x 2', Direct-Indirect, Recessed Fluorescent Fixture	968.74	41.22
		For Drywall Or Plaster Ceilings, Add	*27.82*	
26 51 16 00-0085	EA	2 T5 Lamps, 2' x 2', Direct-Indirect, Recessed Fluorescent Fixture	1,195.85	41.22
		For Drywall Or Plaster Ceilings, Add	*27.82*	

26 51 16 00-0086 2' x 4', Direct-Indirect, Recessed Fluorescent Fixtures *(26 51 16 00-0076)*

26 51 16 00-0087	EA	2 T8 Lamps, 2' x 4', Direct-Indirect, Recessed Fluorescent Fixture	967.60	48.02
		For Drywall Or Plaster Ceilings, Add	*32.46*	
26 51 16 00-0088	EA	3 T8 Lamps, 2' x 4', Direct-Indirect, Recessed Fluorescent Fixture	1,210.32	48.02
		For Drywall Or Plaster Ceilings, Add	*32.46*	
26 51 16 00-0089	EA	1 T5 Lamp, 2' x 4', Direct-Indirect, Recessed Fluorescent Fixture	1,293.04	48.02
		For Drywall Or Plaster Ceilings, Add	*32.46*	
26 51 16 00-0090	EA	2 T5 Lamps, 2' x 4', Direct-Indirect, Recessed Fluorescent Fixture	1,422.64	48.02
		For Drywall Or Plaster Ceilings, Add	*32.46*	

26 51 16 00-0091 Volumetric, Recessed Fluorescent Fixtures *(26 51 16 00-0038)*

26 51 16 00-0092 1' x 4', Volumetric, Recessed Fluorescent Fixtures *(26 51 16 00-0091)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 16 00-0093	EA	2 T8 Lamps, 1' x 4', Volumetric, Recessed Fluorescent Fixture	856.47	37.41
		For Drywall Or Plaster Ceilings, Add	*25.51*	
26 51 16 00-0094	EA	2 T5 Lamps, 1' x 4', Volumetric, Recessed Fluorescent Fixture	1,152.91	37.41
		For Drywall Or Plaster Ceilings, Add	*25.51*	
26 51 16 00-0095		2' x 2', Volumetric, Recessed Fluorescent Fixtures *(26 51 16 00-0091)*		
26 51 16 00-0096	EA	2 T8 Lamps, 2' x 2', Volumetric, Recessed Fluorescent Fixture	849.78	41.22
		For Drywall Or Plaster Ceilings, Add	*27.82*	
26 51 16 00-0097	EA	2 T5 Lamps, 2' x 2', Volumetric, Recessed Fluorescent Fixture	982.33	41.22
		For Drywall Or Plaster Ceilings, Add	*27.82*	
26 51 16 00-0098		2' x 4', Volumetric, Recessed Fluorescent Fixtures *(26 51 16 00-0091)*		
26 51 16 00-0099	EA	2 T8 Lamps, 2' x 4', Volumetric, Recessed Fluorescent Fixture	942.00	48.02
		For Drywall Or Plaster Ceilings, Add	*32.46*	
26 51 16 00-0100	EA	2 T5 Lamps, 2' x 4', Volumetric, Recessed Fluorescent Fixture	944.21	48.02
		For Drywall Or Plaster Ceilings, Add	*32.46*	
26 51 16 00-0101		Wet Location, Lensed, Lay-In/Troffer, Recessed Fluorescent Fixtures *(26 51 16 00-0038)*		
26 51 16 00-0102		1' x 4', Wet Location, Lensed, Lay-In/Troffer, Recessed Fluorescent Fixtures *(26 51 16 00-0101)*		
26 51 16 00-0103	EA	2 T8 Lamps, 1' x 4', Wet Location, Lensed, Lay-In/Troffer, Recessed Fluorescent Fixture	788.63	37.41
		For Drywall Or Plaster Ceilings, Add	*25.51*	
26 51 16 00-0104		2' x 2', Wet Location, Lensed, Lay-In/Troffer, Recessed Fluorescent Fixtures *(26 51 16 00-0101)*		
26 51 16 00-0105	EA	2 T8 Lamps, 2' x 2', Wet Location, Lensed, Lay-In/Troffer, Recessed Fluorescent Fixture	749.88	41.22
		For Drywall Or Plaster Ceilings, Add	*27.82*	
26 51 16 00-0106		2' x 4', Wet Location, Lensed, Lay-In/Troffer, Recessed Fluorescent Fixtures *(26 51 16 00-0101)*		
26 51 16 00-0107	EA	2 T8 Lamps, 2' x 4', Wet Location, Lensed, Lay-In/Troffer, Recessed Fluorescent Fixture	911.54	48.02
		For Drywall Or Plaster Ceilings, Add	*32.46*	
26 51 16 00-0108	EA	3 T8 Lamps, 2' x 4', Wet Location, Lensed, Lay-In/Troffer, Recessed Fluorescent Fixture	639.43	48.02
		For Drywall Or Plaster Ceilings, Add	*32.46*	
26 51 16 00-0109	EA	4 T8 Lamps, 2' x 4', Wet Location, Lensed, Lay-In/Troffer, Recessed Fluorescent Fixture	1,051.95	48.02
		For Drywall Or Plaster Ceilings, Add	*32.46*	
26 51 16 00-0110		Vandal Resistant, Lensed, Lay-In/Troffer, Recessed Fluorescent Fixtures *(26 51 16 00-0038)*		
26 51 16 00-0111		1' x 4', Vandal Resistant, Lensed, Lay-In/Troffer, Recessed Fluorescent Fixtures *(26 51 16 00-0110)*		
26 51 16 00-0112	EA	2 T8 Lamps, 1' x 4', Vandal Resistant, Lensed, Lay-In/Troffer, Recessed Fluorescent Fixture	748.36	37.41
		For Drywall Or Plaster Ceilings, Add	*25.51*	
26 51 16 00-0113		2' x 2', Vandal Resistant, Lensed, Lay-In/Troffer, Recessed Fluorescent Fixtures *(26 51 16 00-0110)*		
26 51 16 00-0114	EA	2 T8 Lamps, 2' x 2', Vandal Resistant, Lensed, Lay-In/Troffer, Recessed Fluorescent Fixture	748.92	41.22
		For Drywall Or Plaster Ceilings, Add	*27.82*	
26 51 16 00-0115		2' x 4', Vandal Resistant, Lensed, Lay-In/Troffer, Recessed Fluorescent Fixtures *(26 51 16 00-0110)*		
26 51 16 00-0116	EA	2 T8 Lamps, 2' x 4', Vandal Resistant, Lensed, Lay-In/Troffer, Recessed Fluorescent Fixture	934.14	48.02
		For Drywall Or Plaster Ceilings, Add	*32.46*	
26 51 16 00-0117	EA	3 T8 Lamps, 2' x 4', Vandal Resistant, Lensed, Lay-In/Troffer, Recessed Fluorescent Fixture	949.11	48.02
		For Drywall Or Plaster Ceilings, Add	*32.46*	
26 51 16 00-0118	EA	4 T8 Lamps, 2' x 4', Vandal Resistant, Lensed, Lay-In/Troffer, Recessed Fluorescent Fixture	972.89	48.02
		For Drywall Or Plaster Ceilings, Add	*32.46*	
26 51 16 00-0119		Striplight Fluorescent Fixtures *(26 51 16 00-0001)*		
26 51 16 00-0120		1 Lamp Cross Section, Striplight Fluorescent Fixtures *(26 51 16 00-0119)*		
26 51 16 00-0121	EA	1-1/2' Length, 1 T8 Lamp, Striplight Fluorescent Fixture	298.24	30.91
26 51 16 00-0122	EA	2' Length, 1 T8 Lamp, Striplight Fluorescent Fixture	375.21	30.91
26 51 16 00-0123	EA	3' Length, 1 T8 Lamp, Striplight Fluorescent Fixture	364.05	34.31
26 51 16 00-0124	EA	4' Length, 1 T8 Lamp, Striplight Fluorescent Fixture	369.13	37.71
26 51 16 00-0125	EA	8' Length, 1 T8 Lamp, Striplight Fluorescent Fixture	452.73	44.67
26 51 16 00-0126		2 Lamp Cross Section, Striplight Fluorescent Fixtures *(26 51 16 00-0119)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 16 00-0127	EA	2' Length, 2 T8 Lamps, Striplight Fluorescent Fixture	368.94	34.31
26 51 16 00-0128	EA	3' Length, 2 T8 Lamps, Striplight Fluorescent Fixture	376.39	37.71
26 51 16 00-0129	EA	4' Length, 2 T8 Lamps, Striplight Fluorescent Fixture	381.40	41.22
26 51 16 00-0130		**3 Lamp Cross Section, Striplight Fluorescent Fixtures** *(26 51 16 00-0119)*		
26 51 16 00-0131	EA	2' Length, 3 T8 Lamps, Striplight Fluorescent Fixture	562.59	34.31
26 51 16 00-0132	EA	3' Length, 3 T8 Lamps, Striplight Fluorescent Fixture	536.29	37.71
26 51 16 00-0133	EA	4' Length, 3 T8 Lamps, Striplight Fluorescent Fixture	541.22	41.22
26 51 16 00-0134		**Display Case Fluorescent Fixtures** *(26 51 16 00-0119)*		
26 51 16 00-0135	EA	1 T8 Lamp, 1-1/2' Length, Undercabinet/Display Case Fluorescent Fixture (Lightolier TCU15W)	192.30	33.84
26 51 16 00-0136	EA	1 T8 Lamp, 2' Length, Undercabinet/Display Case Fluorescent Fixture (Lightolier TCU20W)	267.25	33.84
26 51 16 00-0137	EA	1 T8 Lamp, 3' Length, Undercabinet/Display Case Fluorescent Fixture (Lightolier TCU30W)	288.08	39.48
26 51 16 00-0138	EA	1 T8 Lamp, 4' Length, Undercabinet/Display Case Fluorescent Fixture (Lightolier TCU40W)	298.74	39.48
26 51 16 00-0139		**Industrial Fluorescent Fixtures** *(26 51 16 00-0001)*		
26 51 16 00-0140		**1 Lamp Cross Section, Industrial Fluorescent Fixtures** *(26 51 16 00-0139)*		
26 51 16 00-0141	EA	2' Length, 1 T8 Lamp, Industrial Fluorescent Fixture	449.38	30.91
26 51 16 00-0142	EA	4' Length, 1 T8 Lamp, Industrial Fluorescent Fixture	469.25	37.71
26 51 16 00-0143	EA	8' Length, 1 T8 Lamp, Industrial Fluorescent Fixture	893.44	48.02
26 51 16 00-0144		**2 Lamp Cross Section, Industrial Fluorescent Fixtures** *(26 51 16 00-0139)*		
26 51 16 00-0145	EA	2' Length, 2 T8 Lamps, Industrial Fluorescent Fixture	460.56	34.31
26 51 16 00-0146	EA	4' Length, 2 T8 Lamps, Industrial Fluorescent Fixture	481.54	41.22
26 51 16 00-0147	EA	8' Length, 2 T8 Lamps, Industrial Fluorescent Fixture	907.67	48.02
26 51 16 00-0148		**3 Lamp Cross Section, Industrial Fluorescent Fixtures** *(26 51 16 00-0139)*		
26 51 16 00-0149	EA	2' Length, 3 T8 Lamps, Industrial Fluorescent Fixture	479.69	34.31
26 51 16 00-0150	EA	4' Length, 3 T8 Lamps, Industrial Fluorescent Fixture	498.47	41.22
26 51 16 00-0151	EA	8' Length, 3 T8 Lamps, Industrial Fluorescent Fixture	773.57	48.02
26 51 16 00-0152		**4 Lamp Cross Section, Industrial Fluorescent Fixtures** *(26 51 16 00-0139)*		
26 51 16 00-0153	EA	4' Length, 4 T8 Lamps, Industrial Fluorescent Fixture	705.84	41.22
26 51 16 00-0154	EA	8' Length, 4 T8 Lamps, Industrial Fluorescent Fixture	1,049.57	48.02
26 51 16 00-0155		**Flanged Fluorescent Fixture** *(26 51 16 00-0001)* Note: For plaster or drywall application. With electronic ballast.		
26 51 16 00-0156	EA	2 T8 Lamps, 2' x 4', Prismatic Lensed, Flanged Fluorescent Fixture	643.54	61.83
26 51 16 00-0157	EA	3 T8 Lamps, 2' x 4', Prismatic Lensed, Flanged Fluorescent Fixture	781.54	61.83
26 51 16 00-0158	EA	4 T8 Lamps, 2' x 4', Prismatic Lensed, Flanged Fluorescent Fixture	788.66	61.83
26 51 16 00-0159		**Undercabinet Fluorescent Fixtures** *(26 51 16 00-0001)*		
26 51 16 00-0160	EA	1 T5 Lamp, 12-3/16" Length, Slimline Undercabinet Fluorescent Fixture	227.87	27.83
26 51 16 00-0161	EA	1 T5 Lamp, 21-3/16" Length, Slimline Undercabinet Fluorescent Fixture	263.29	34.00
26 51 16 00-0162	EA	2 T5 Lamps, 24-7/16" Length, Slimline Undercabinet Fluorescent Fixture	258.32	34.00
26 51 16 00-0163	EA	1 T5 Lamp, 33-7/16" Length, Slimline Undercabinet Fluorescent Fixture	317.14	37.10
26 51 16 00-0164	EA	2 T5 Lamps, 42-7/16" Length, Slimline Undercabinet Fluorescent Fixture	368.51	43.28
26 51 16 00-0165		**Corner Mounted, Fluorescent Fixtures** *(26 51 16 00-0001)* Note: Includes acrylic drop dish diffuser.		
26 51 16 00-0166		**2' Length, Corner Mounted, Fluorescent Fixtures** *(26 51 16 00-0165)*		
26 51 16 00-0167	EA	1 T8 Lamp, 2' Length, Corner Mounted, Fluorescent Fixture	260.39	30.91
26 51 16 00-0168	EA	2 T8 Lamps, 2' Length, Corner Mounted, Fluorescent Fixture	291.47	30.91
26 51 16 00-0169		**3' Length, Corner Mounted, Fluorescent Fixtures** *(26 51 16 00-0165)*		
26 51 16 00-0170	EA	1 T8 Lamp, 3' Length, Corner Mounted, Fluorescent Fixture	298.05	32.46
26 51 16 00-0171	EA	2 T8 Lamps, 3' Length, Corner Mounted, Fluorescent Fixture	327.75	32.46
26 51 16 00-0172		**4' Length, Corner Mounted, Fluorescent Fixtures** *(26 51 16 00-0165)*		
26 51 16 00-0173	EA	1 T8 Lamp, 4' Length, Corner Mounted, Fluorescent Fixture	293.35	34.00
26 51 16 00-0174	EA	2 T8 Lamps, 4' Length, Corner Mounted, Fluorescent Fixture	324.14	34.00
26 51 16 00-0175		**Wall Bracket, Fluorescent Fixtures** *(26 51 16 00-0001)*		
26 51 16 00-0176		**Wall Bracket, Fluorescent Fixtures (Lithonia W)** *(26 51 16 00-0175)* Note: Includes extruded aluminum housing with brushed finish, acrylic diffuser and solid-state electronic ballast.		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 16 00-0177		**2' Length, Wall Bracket, Fluorescent Fixtures (Lithonia W)** *(26 51 16 00-0176)*		
26 51 16 00-0178	EA	1 T8 Lamp, 2' Length, Wall Bracket, Fluorescent Fixture (Lithonia W)	265.27	51.88
26 51 16 00-0179	EA	2 T8 Lamps, 2' Length, Wall Bracket, Fluorescent Fixture (Lithonia W)	270.42	51.88
26 51 16 00-0180		**3' Length, Wall Bracket, Fluorescent Fixtures (Lithonia W)** *(26 51 16 00-0176)*		
26 51 16 00-0181	EA	1 T8 Lamp, 3' Length, Wall Bracket, Fluorescent Fixture (Lithonia W)	353.82	51.88
26 51 16 00-0182	EA	2 T8 Lamps, 3' Length, Wall Bracket, Fluorescent Fixture (Lithonia W)	361.01	51.88
26 51 16 00-0183		**4' Length, Wall Bracket, Fluorescent Fixtures (Lithonia W)** *(26 51 16 00-0176)*		
26 51 16 00-0184	EA	1 T8 Lamp, 4' Length, Wall Bracket, Fluorescent Fixture (Lithonia W)	367.81	51.88
26 51 16 00-0185	EA	2 T8 Lamps, 4' Length, Wall Bracket, Fluorescent Fixture (Lithonia W)	372.96	51.88
26 51 16 00-0186		**Wall Bracket, Fluorescent Fixtures (Lithonia WP)** *(26 51 16 00-0175)* Note: Includes 20 gauge steel housing with baked finish, acrylic diffuser and solid-state electronic ballast.		
26 51 16 00-0187		**2' Length, Wall Bracket, Fluorescent Fixtures (Lithonia WP)** *(26 51 16 00-0186)*		
26 51 16 00-0188	EA	1 T8 Lamp, 2' Length, Wall Bracket, Fluorescent Fixture (Lithonia WP)	696.44	51.88
26 51 16 00-0189	EA	2 T8 Lamps, 2' Length, Wall Bracket, Fluorescent Fixture (Lithonia WP)	701.59	51.88
26 51 16 00-0190		**3' Length, Wall Bracket, Fluorescent Fixtures (Lithonia WP)** *(26 51 16 00-0186)*		
26 51 16 00-0191	EA	1 T8 Lamp, 3' Length, Wall Bracket, Fluorescent Fixture (Lithonia WP)	541.74	51.88
26 51 16 00-0192	EA	2 T8 Lamps, 3' Length, Wall Bracket, Fluorescent Fixture (Lithonia WP)	548.93	51.88
26 51 16 00-0193		**4' Length, Wall Bracket, Fluorescent Fixtures (Lithonia WP)** *(26 51 16 00-0186)*		
26 51 16 00-0194	EA	1 T8 Lamp, 4' Length, Wall Bracket, Fluorescent Fixture (Lithonia WP)	629.41	51.88
26 51 16 00-0195	EA	2 T8 Lamps, 4' Length, Wall Bracket, Fluorescent Fixture (Lithonia WP)	634.56	51.88
26 51 16 00-0196		**Wall Bracket, Fluorescent Fixtures (Lithonia WC)** *(26 51 16 00-0175)* Note: Includes 20 gauge steel housing with baked finish, acrylic diffuser and solid-state electronic ballast.		
26 51 16 00-0197		**2' Length, Wall Bracket, Fluorescent Fixtures (Lithonia WC)** *(26 51 16 00-0196)*		
26 51 16 00-0198	EA	1 T8 Lamp, 2' Length, Wall Bracket, Fluorescent Fixture (Lithonia WC)	252.52	51.88
26 51 16 00-0199	EA	2 T8 Lamps, 2' Length, Wall Bracket, Fluorescent Fixture (Lithonia WC)	257.68	51.88
26 51 16 00-0200		**3' Length, Wall Bracket, Fluorescent Fixtures (Lithonia WC)** *(26 51 16 00-0196)*		
26 51 16 00-0201	EA	1 T8 Lamp, 3' Length, Wall Bracket, Fluorescent Fixture (Lithonia WC)	254.57	51.88
26 51 16 00-0202	EA	2 T8 Lamps, 3' Length, Wall Bracket, Fluorescent Fixture (Lithonia WC)	261.76	51.88
26 51 16 00-0203		**4' Length, Wall Bracket, Fluorescent Fixtures (Lithonia WC)** *(26 51 16 00-0196)*		
26 51 16 00-0204	EA	1 T8 Lamp, 4' Length, Wall Bracket, Fluorescent Fixture (Lithonia WC)	242.76	51.88
26 51 16 00-0205	EA	2 T8 Lamps, 4' Length, Wall Bracket, Fluorescent Fixture (Lithonia WC)	247.91	51.88
26 51 16 00-0206		**Low Occupancy, Industrial Fluorescent Fixtures** *(26 51 16 00-0001)*		
26 51 16 00-0207	EA	1 T8 Lamp, 4' Length, Bi-Level Illumination, Industrial Fluorescent Fixture With Integral Occupancy Sensor (Deco SMART™ DSBL-CP)	322.10	37.71
26 51 16 00-0208	EA	2 T8 Lamps, 4' Length, Bi-Level Illumination, Industrial Fluorescent Fixture With Integral Occupancy Sensor (Deco SMART™ DSBL-CP)	327.26	41.22
26 51 16 00-0209		**Ceiling Mounted Fluorescent Fixtures** *(26 51 16)*		
26 51 16 00-0210		**Ceiling Mounted, Compact Fluorescent/Incandescent Fixtures** *(26 51 16 00-0209)*		
26 51 16 00-0211		**Glass Globe, Compact Fluorescent/Incandescent Fixtures** *(26 51 16 00-0210)*		
26 51 16 00-0212	EA	6" Diameter, Ceiling Mounted, Glass Globe, Compact Fluorescent/Incandescent Fixture	230.33	45.12
26 51 16 00-0213	EA	9" Diameter, Ceiling Mounted, Mushroom Style Glass Globe, Compact Fluorescent/Incandescent Fixture	285.95	45.12
26 51 16 00-0214		**Ceiling Mounted, Circline Fluorescent Fixtures** *(26 51 16 00-0209)*		
26 51 16 00-0215		**Exposed Lamps, Circline Fluorescent Fixtures** *(26 51 16 00-0214)*		
26 51 16 00-0216	EA	8-1/2" Diameter, Ceiling Mounted, Exposed Lamps, Circline Fluorescent Fixture	180.41	45.12
26 51 16 00-0217	EA	12" Diameter, Ceiling Mounted, Exposed Lamps, Circline Fluorescent Fixture	200.60	45.12
26 51 16 00-0218		**Low Profile Acrylic Diffuser, Circline Fluorescent Fixtures** *(26 51 16 00-0214)*		
26 51 16 00-0219	EA	11" Diameter, Ceiling Mounted, Low Profile Acrylic Diffuser, Circline Fluorescent Fixture	304.06	45.12
26 51 16 00-0220	EA	14" Diameter, Ceiling Mounted, Low Profile Acrylic Diffuser, Circline Fluorescent Fixture	457.20	45.12
26 51 16 00-0221	EA	19" Diameter, Ceiling Mounted, Low Profile Acrylic Diffuser, Circline Fluorescent Fixture	563.30	45.12
26 51 16 00-0222	EA	12" Square, Ceiling Mounted, Low Profile Acrylic Diffuser, Circline Fluorescent Fixture	353.67	45.12
26 51 16 00-0223	EA	15" Square, Ceiling Mounted, Low Profile Acrylic Diffuser, Circline Fluorescent Fixture	460.34	45.12

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 16 00-0224	EA	19" Square, Ceiling Mounted, Low Profile Acrylic Diffuser, Circline Fluorescent Fixture	563.30	45.12
26 51 16 00-0225		Ceiling Mounted, Double Twin Tube Compact Fluorescent Fixtures *(26 51 16 00-0209)*		
26 51 16 00-0226		Low Profile Acrylic Diffuser, Double Twin Tube Compact Fluorescent Fixtures *(26 51 16 00-0225)*		
26 51 16 00-0227	EA	11" Diameter, Ceiling Mounted, Low Profile Acrylic Diffuser, Double Twin Tube Compact Fluorescent Fixture	308.33	45.12
26 51 16 00-0228	EA	14" Diameter, Ceiling Mounted, Low Profile Acrylic Diffuser, Double Twin Tube Compact Fluorescent Fixture	420.77	45.12
26 51 16 00-0229	EA	19" Diameter, Ceiling Mounted, Low Profile Acrylic Diffuser, Double Twin Tube Compact Fluorescent Fixture	516.09	45.12
26 51 16 00-0230	EA	12" Square, Ceiling Mounted, Low Profile Acrylic Diffuser, Double Twin Tube Compact Fluorescent Fixture	237.35	45.12
26 51 16 00-0231	EA	15" Square, Ceiling Mounted, Low Profile Acrylic Diffuser, Double Twin Tube Compact Fluorescent Fixture	295.77	45.12
26 51 16 00-0232	EA	19" Square, Ceiling Mounted, Low Profile Acrylic Diffuser, Double Twin Tube Compact Fluorescent Fixture	406.46	45.12
26 51 16 00-0233		Pendant Mounted, Compact Fluorescent/Incandescent Downlights *(26 51 16 00-0209)*		
26 51 16 00-0234		Pendant Mounted, Compact Fluorescent/Incandescent Open Reflector Downlights *(26 51 16 00-0233)*		
26 51 16 00-0235	EA	6" Diameter, Pendant Mounted, Open Reflector Compact Fluorescent/Incandescent Downlight	530.51	37.07
26 51 16 00-0236		Pendant Mounted, Compact Fluorescent/Incandescent Downlights With Baffle *(26 51 16 00-0233)*		
26 51 16 00-0237	EA	6" Diameter, Pendant Mounted, Compact Fluorescent/Incandescent Downlight With Baffle	615.19	37.07
26 51 16 00-0238	EA	8" Diameter, Pendant Mounted, Compact Fluorescent/Incandescent Downlight With Baffle	888.40	37.07
26 51 16 00-0239		Pendant Mounted, Horizontal Indirect Fluorescent Fixtures *(26 51 16 00-0209)*		
26 51 16 00-0240	EA	1 T5HO Lamp, 4' Length, Pendent Mounted, Horizontal Indirect Fluorescent Fixture	313.77	37.07
26 51 16 00-0241	EA	2 T5HO Lamps, 4' Length, Pendent Mounted, Horizontal Indirect Fluorescent Fixture	334.96	37.07
26 51 16 00-0242	EA	3 T5HO Lamps, 4' Length, Pendent Mounted, Horizontal Indirect Fluorescent Fixture	403.81	37.07
26 51 16 00-0243	EA	2 T5HO Lamps, 8' Length, Pendent Mounted, Horizontal Indirect Fluorescent Fixture	419.46	37.07
26 51 16 00-0244	EA	4 T5HO Lamps, 8' Length, Pendent Mounted, Horizontal Indirect Fluorescent Fixture	505.17	37.07
26 51 16 00-0245	EA	6 T5HO Lamps, 8' Length, Pendent Mounted, Horizontal Indirect Fluorescent Fixture	606.06	37.07
26 51 16 00-0246		Finelite Fluorescent Fixtures *(26 51 16 00-0209)*		
26 51 16 00-0247		Pendant Mounted, Fluorescent Downlight Fixtures (Finelite Series 10) *(26 51 16 00-0246)*		
26 51 16 00-0248	EA	1 T8 Lamp, 1 Lamp Wide Cross Section, 4' Length, Pendant Mounted, Fluorescent Downlight Fixture (Finelite Series 10)	534.65	52.56
26 51 16 00-0249	EA	2 T8 Lamps, 2 Lamp Wide Cross Section, 4' Length, Pendant Mounted, Fluorescent Downlight Fixture (Finelite Series 10)	532.38	52.56
26 51 16 00-0250	EA	3 T8 Lamps, 3 Lamp Wide Cross Section, 4' Length, Pendant Mounted, Fluorescent Downlight Fixture (Finelite Series 10)	577.05	52.56
26 51 16 00-0251	EA	1 T5HO Lamp, 1 Lamp Wide Cross Section, 4' Length, Pendant Mounted, Fluorescent Downlight Fixture (Finelite Series 10)	648.38	52.56
26 51 16 00-0252	EA	2 T5HO Lamps, 2 Lamp Wide Cross Section, 4' Length, Pendant Mounted, Fluorescent Downlight Fixture (Finelite Series 10)	712.90	52.56
26 51 16 00-0253	EA	3 T5HO Lamps, 3 Lamp Wide Cross Section, 4' Length, Pendant Mounted, Fluorescent Downlight Fixture (Finelite Series 10)	880.69	52.56
26 51 16 00-0254	EA	2 T8 Lamps, 1 Lamp Wide Cross Section, 8' Length, Pendant Mounted, Fluorescent Downlight Fixture (Finelite Series 10)	769.34	54.82
26 51 16 00-0255	EA	4 T8 Lamps, 2 Lamp Wide Cross Section, 8' Length, Pendant Mounted, Fluorescent Downlight Fixture (Finelite Series 10)	792.96	54.82
26 51 16 00-0256	EA	6 T8 Lamps, 3 Lamp Wide Cross Section, 8' Length, Pendant Mounted, Fluorescent Downlight Fixture (Finelite Series 10)	882.30	54.82
26 51 16 00-0257	EA	2 T5HO Lamps, 1 Lamp Wide Cross Section, 8' Length, Pendant Mounted, Fluorescent Downlight Fixture (Finelite Series 10)	846.59	54.82
26 51 16 00-0258	EA	4 T5HO Lamps, 2 Lamp Wide Cross Section, 8' Length, Pendant Mounted, Fluorescent Downlight Fixture (Finelite Series 10)	1,069.50	54.82
26 51 16 00-0259	EA	6 T5HO Lamps, 3 Lamp Wide Cross Section, 8' Length, Pendant Mounted, Fluorescent Downlight Fixture (Finelite Series 10)	1,264.26	54.82
26 51 16 00-0260	EA	3 T8 Lamps, 1 Lamp Wide Cross Section, 12' Length, Pendant Mounted, Fluorescent Downlight Fixture (Finelite Series 10)	1,022.80	57.08
26 51 16 00-0261	EA	6 T8 Lamps, 2 Lamp Wide Cross Section, 12' Length, Pendant Mounted, Fluorescent Downlight Fixture (Finelite Series 10)	1,062.93	57.08
26 51 16 00-0262	EA	9 T8 Lamps, 3 Lamp Wide Cross Section, 12' Length, Pendant Mounted, Fluorescent Downlight Fixture (Finelite Series 10)	1,178.16	57.08
26 51 16 00-0263	EA	3 T5HO Lamps, 1 Lamp Wide Cross Section, 12' Length, Pendant Mounted, Fluorescent Downlight Fixture (Finelite Series 10)	1,185.62	57.08
26 51 16 00-0264	EA	6 T5HO Lamps, 2 Lamp Wide Cross Section, 12' Length, Pendant Mounted, Fluorescent Downlight Fixture (Finelite Series 10)	1,473.06	57.08
26 51 16 00-0265	EA	9 T5HO Lamps, 3 Lamp Wide Cross Section, 12' Length, Pendant Mounted, Fluorescent Downlight Fixture (Finelite Series 10)	1,769.88	57.08
26 51 16 00-0266		Pendant Mounted, Fluorescent Wallwash Fixtures (Finelite Series X2-O) *(26 51 16 00-0246)*		
26 51 16 00-0267	EA	1 T8 Lamp, 1 Lamp Wide Cross Section, 4' Length, Pendant Mounted, Fluorescent Wallwash Fixture (Finelite Series X2-O)	529.01	52.56

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 16 00-0268	EA	1 T5 Lamp, 1 Lamp Wide Cross Section, 4' Length, Pendant Mounted, Fluorescent Wallwash Fixture (Finelite Series X2-O)	577.58	52.56
26 51 16 00-0269	EA	1 T5HO Lamp, 1 Lamp Wide Cross Section, 4' Length, Pendant Mounted, Fluorescent Wallwash Fixture (Finelite Series X2-O)	577.91	52.56
26 51 16 00-0270	EA	2 T8 Lamps, 1 Lamp Wide Cross Section, 8' Length, Pendant Mounted, Fluorescent Wallwash Fixture (Finelite Series X2-O)	784.37	54.82
26 51 16 00-0271	EA	2 T5 Lamps, 1 Lamp Wide Cross Section, 8' Length, Pendant Mounted, Fluorescent Wallwash Fixture (Finelite Series X2-O)	840.51	54.82
26 51 16 00-0272	EA	2 T5HO Lamps, 1 Lamp Wide Cross Section, 8' Length, Pendant Mounted, Fluorescent Wallwash Fixture (Finelite Series X2-O)	841.18	54.82
26 51 16 00-0273	EA	3 T8 Lamps, 1 Lamp Wide Cross Section, 12' Length, Pendant Mounted, Fluorescent Wallwash Fixture (Finelite Series X2-O)	1,039.73	57.08
26 51 16 00-0274	EA	3 T5 Lamps, 1 Lamp Wide Cross Section, 12' Length, Pendant Mounted, Fluorescent Wallwash Fixture (Finelite Series X2-O)	1,185.45	57.08
26 51 16 00-0275	EA	3 T5HO Lamps, 1 Lamp Wide Cross Section, 12' Length, Pendant Mounted, Fluorescent Wallwash Fixture (Finelite Series X2-O)	1,186.45	57.08
26 51 16 00-0276		**Pendant Mounted, Fluorescent Indirect Fixtures (Finelite Series 8)** *(26 51 16 00-0246)*		
26 51 16 00-0277	EA	1 T8 Lamp, 1 Lamp Wide Cross Section, 4' Length, Pendant Mounted, Fluorescent Indirect Fixture (Finelite Series 8-I)	400.32	52.56
26 51 16 00-0278	EA	2 T8 Lamps, 2 Lamp Wide Cross Section, 4' Length, Pendant Mounted, Fluorescent Indirect Fixture (Finelite Series 8-I)	423.15	52.56
26 51 16 00-0279	EA	3 T8 Lamps, 3 Lamp Wide Cross Section, 4' Length, Pendant Mounted, Fluorescent Indirect Fixture (Finelite Series 8-I)	503.61	52.56
26 51 16 00-0280	EA	2 T8 Lamps, 1 Lamp Wide Cross Section, 8' Length, Pendant Mounted, Fluorescent Indirect Fixture (Finelite Series 8-I)	527.56	54.82
26 51 16 00-0281	EA	4 T8 Lamps, 2 Lamp Wide Cross Section, 8' Length, Pendant Mounted, Fluorescent Indirect Fixture (Finelite Series 8-I)	625.61	54.82
26 51 16 00-0282	EA	6 T8 Lamps, 3 Lamp Wide Cross Section, 8' Length, Pendant Mounted, Fluorescent Indirect Fixture (Finelite Series 8-I)	742.00	54.82
26 51 16 00-0283	EA	3 T8 Lamps, 1 Lamp Wide Cross Section, 12' Length, Pendant Mounted, Fluorescent Indirect Fixture (Finelite Series 8-I)	733.38	57.08
26 51 16 00-0284	EA	6 T8 Lamps, 2 Lamp Wide Cross Section, 12' Length, Pendant Mounted, Fluorescent Indirect Fixture (Finelite Series 8-I)	901.42	57.08
26 51 16 00-0285	EA	9 T8 Lamps, 3 Lamp Wide Cross Section, 12' Length, Pendant Mounted, Fluorescent Indirect Fixture (Finelite Series 8-I)	1,079.93	57.08
26 51 16 00-0286		**Fluorescent, Recessed Fixture Housings** *(26 51 16)*		
26 51 16 00-0287	EA	4" Round, Fluorescent, T Or ICT Recessed Fixture Housing	137.18	32.26
		For ICAT Housing, Add	*11.44*	
26 51 16 00-0288	EA	5" Round, Fluorescent, T Or ICT Recessed Fixture Housing	142.01	32.26
		For ICAT Housing, Add	*12.06*	
26 51 16 00-0289	EA	6" Round, Fluorescent, T Or ICT Recessed Fixture Housing	147.93	33.73
		For ICAT Housing, Add	*12.53*	
26 51 16 00-0290	EA	7" Round, Fluorescent, T Or ICT Recessed Fixture Housing	155.50	34.96
		For ICAT Housing, Add	*13.22*	
26 51 16 00-0291	EA	8" Round, Fluorescent, T Or ICT Recessed Fixture Housing	162.07	36.78
		For ICAT Housing, Add	*13.78*	
26 51 16 00-0292	EA	10" To 12" Square, Fluorescent, T Or ICT Recessed Fixture Housing	167.66	39.03
		For ICAT Housing, Add	*14.06*	
26 51 16 00-0293		**Compact Fluorescent, Recessed Fixture Housings** *(26 51 16)*		
26 51 16 00-0294	EA	4" Round, Compact Fluorescent, T Or ICT Recessed Fixture Housing	157.96	32.26
		For ICAT Housing, Add	*14.12*	
26 51 16 00-0295	EA	5" Round, Compact Fluorescent, T Or ICT Recessed Fixture Housing	162.72	32.26
		For ICAT Housing, Add	*14.73*	
26 51 16 00-0296	EA	6" Round, Compact Fluorescent, T Or ICT Recessed Fixture Housing	168.79	33.84
		For ICAT Housing, Add	*15.23*	
26 51 16 00-0297	EA	7" Round, Compact Fluorescent, T Or ICT Recessed Fixture Housing	173.63	35.30
		For ICAT Housing, Add	*15.56*	
26 51 16 00-0298	EA	8" Round, Compact Fluorescent, T Or ICT Recessed Fixture Housing	179.22	36.78
		For ICAT Housing, Add	*15.99*	
26 51 16 00-0299	EA	10" To 12" Round, Compact Fluorescent, T Or ICT Recessed Fixture Housing	184.45	39.03
		For ICAT Housing, Add	*16.23*	
26 51 16 00-0300		**Fluorescent Track Lighting Fixtures** *(26 51 16)*		
26 51 16 00-0301	EA	2L 18W BX Track Fixture, Electronic Ballast Note: White or Black Finish, 120V.	327.88	18.83
26 51 16 00-0302	EA	2L 39W BX Track Fixture, Electronic Ballast Note: White or Black Finish, 120V.	338.44	18.83
26 51 16 00-0303	EA	2L 40W BX Track Fixture, Electronic Ballast Note: White or Black Finish, 120V.	345.03	18.83
26 51 16 00-0304	EA	2L 50W BX Track Fixture, Electronic Ballast Note: White or Black Finish, 120V.	226.12	18.83
26 51 16 00-0305	EA	2L, 55 Watt BX Track Fixture, Electronic Ballast Note: White or Black Finish, 120V.	372.35	18.83
26 51 16 00-0306		**Compact Fluorescent Track Lighting Fixtures** *(26 51 16)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 16 00-0307	EA	Compact Fluorescent Track Lighting Fixture	101.50	18.83
26 51 16 00-0308		Compact Fluorescent, Wet Location, Dust Resistant, Cast Metal Guard, Enclosed And Gasketed, Vapor Tight Fixtures *(26 51 16)*		
26 51 16 00-0309	EA	13 Watt Compact Fluorescent, Ceiling Mounted, Cast Metal Guard, Enclosed And Gasketed, Vapor Tight Fixture	137.63	45.12
		For Wall Mounted, Add	*6.02*	
26 51 16 00-0310	EA	22 Watt Compact Fluorescent, Ceiling Mounted, Cast Metal Guard, Enclosed And Gasketed, Vapor Tight Fixture	141.37	45.12
		For Wall Mounted, Add	*6.02*	
26 51 16 00-0311	EA	28 Watt Compact Fluorescent, Ceiling Mounted, Cast Metal Guard, Enclosed And Gasketed, Vapor Tight Fixture	150.60	45.12
		For Wall Mounted, Add	*6.02*	
26 51 16 00-0312		Wet Location, Dust Resistant, Vapor Tight, Enclosed And Gasketed, Industrial Fluorescent Fixtures *(26 51 16)*		
26 51 16 00-0313		4' Length, Enclosed And Gasketed, Industrial Fluorescent Fixtures *(26 51 16 00-0312)*		
26 51 16 00-0314		4' Length, Enclosed And Gasketed, Industrial Fluorescent Fixtures (Lithonia DMW) *(26 51 16 00-0313)*		
		Note: Includes high impact acrylic molded lens.		
26 51 16 00-0315	EA	1 T8 Lamp, 4' Length, Enclosed And Gasketed, Industrial Fluorescent Fixture (Lithonia DMW)	319.90	48.02
		For T5 Fixture Instead Of T8, Add	*28.37*	
26 51 16 00-0316	EA	2 T8 Lamps, 4' Length, Enclosed And Gasketed, Industrial Fluorescent Fixture (Lithonia DMW)	336.13	48.02
		For T5 Fixture Instead Of T8, Add	*30.23*	
26 51 16 00-0317	EA	3 T8 Lamps, 4' Length, Enclosed And Gasketed, Industrial Fluorescent Fixture (Lithonia DMW)	533.87	48.02
		For T5 Fixture Instead Of T8, Add	*52.87*	
26 51 16 00-0318	EA	1 T8HO Lamp, 4' Length, Enclosed And Gasketed, Industrial Fluorescent Fixture (Lithonia DMW)	458.64	48.02
26 51 16 00-0319	EA	2 T8HO Lamps, 4' Length, Enclosed And Gasketed, Industrial Fluorescent Fixture (Lithonia DMW)	746.36	48.02
26 51 16 00-0320		4' Length, Enclosed And Gasketed, Industrial Fluorescent Fixtures (Day-Brite V2W) *(26 51 16 00-0313)*		
		Note: Includes high impact acrylic molded lens.		
26 51 16 00-0321	EA	1 T8 Lamp, 4' Length, Enclosed And Gasketed, Industrial Fluorescent Fixture (Day-Brite V2W)	376.87	48.02
26 51 16 00-0322	EA	2 T8 Lamp, 4' Length, Enclosed And Gasketed, Industrial Fluorescent Fixture (Day-Brite V2W)	381.87	48.02
26 51 16 00-0323	EA	3 T8 Lamp, 4' Length, Enclosed And Gasketed, Industrial Fluorescent Fixture (Day-Brite V2W)	563.02	48.02
26 51 16 00-0324	EA	1 T8HO Lamp, 4' Length, Enclosed And Gasketed, Industrial Fluorescent Fixture (Day-Brite V2W)	462.79	48.02
26 51 16 00-0325	EA	2 T8HO Lamp, 4' Length, Enclosed And Gasketed, Industrial Fluorescent Fixture (Day-Brite V2W)	484.42	48.02
26 51 16 00-0326		8' Length, Enclosed And Gasketed, Industrial Fluorescent Fixtures *(26 51 16 00-0312)*		
		Note: Includes high impact acrylic molded lens.		
26 51 16 00-0327		8' Length, Enclosed And Gasketed, Industrial Fluorescent Fixtures (Lithonia TDMW) *(26 51 16 00-0326)*		
		Note: Includes high impact acrylic molded lens.		
26 51 16 00-0328	EA	2 T8 Lamps, 8' Length, Enclosed And Gasketed, Industrial Fluorescent Fixture (Lithonia TDMW)	610.50	65.23
		For T5 Fixture Instead Of T8, Add	*58.69*	
26 51 16 00-0329	EA	4 T8 Lamps, 8' Length, Enclosed And Gasketed, Industrial Fluorescent Fixture (Lithonia TDMW)	636.13	65.23
		For T5 Fixture Instead Of T8, Add	*61.63*	
26 51 16 00-0330		High Bay Fluorescent Fixtures *(26 51 16)*		
26 51 16 00-0331		(T8) Fluorescent, High Bay Fixtures *(26 51 16 00-0330)*		
26 51 16 00-0332		(T8) Fluorescent, High Bay Fixtures (Lithonia) *(26 51 16 00-0331)*		
		Note: For 8' fixture, use two (2) 4' fixtures.		
26 51 16 00-0333	EA	2 T8 Lamps, 4' Length, Fluorescent High Bay Fixture (Lithonia FGB)	515.68	105.11
		For Wire Guard, Add	*40.50*	
		For Polycarbonate Lens, Add	*47.75*	
		For Acrylic Lens, Add	*54.00*	
26 51 16 00-0334	EA	3 T8 Lamps, 4' Length, Fluorescent High Bay Fixture (Lithonia FGB)	538.73	116.45
		For Wire Guard, Add	*40.50*	
		For Polycarbonate Lens, Add	*47.75*	
		For Acrylic Lens, Add	*54.00*	
26 51 16 00-0335	EA	4 T8 Lamps, 4' Length, Fluorescent High Bay Fixture (Lithonia FGB)	610.38	132.93
		For Wire Guard, Add	*40.50*	
		For Polycarbonate Lens, Add	*47.75*	
		For Acrylic Lens, Add	*54.00*	
26 51 16 00-0336	EA	6 T8 Lamps, 4' Length, Fluorescent High Bay Fixture (Lithonia FGB)	737.93	140.04
		For Wire Guard, Add	*40.50*	
		For Polycarbonate Lens, Add	*47.75*	
		For Acrylic Lens, Add	*54.00*	
26 51 16 00-0337	EA	8 T8 Lamps, 4' Length, Fluorescent High Bay Fixture (Lithonia FGB)	804.61	146.54
		For Wire Guard, Add	*40.50*	
		For Polycarbonate Lens, Add	*47.75*	
		For Acrylic Lens, Add	*54.00*	
26 51 16 00-0338	EA	4 T8 Lamps, 4' Length, Fluorescent High Bay Fixture (Lithonia IBZ)	466.28	132.93
		For Wire Guard, Add	*40.50*	
		For Polycarbonate Lens, Add	*47.75*	
		For Acrylic Lens, Add	*54.00*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 16 00-0339	EA	6 T8 Lamps, 4' Length, Fluorescent High Bay Fixture (Lithonia IBZ)	490.82	140.04
		For Wire Guard, Add	*40.50*	
		For Polycarbonate Lens, Add	*47.75*	
		For Acrylic Lens, Add	*54.00*	
26 51 16 00-0340	EA	8 T8 Lamps, 4' Length, Fluorescent High Bay Fixture (Lithonia IBZ)	567.43	146.54
		For Wire Guard, Add	*40.50*	
		For Polycarbonate Lens, Add	*47.75*	
		For Acrylic Lens, Add	*54.00*	

26 51 16 00-0341 (T5HO) Fluorescent, High Bay Fixtures *(26 51 16 00-0330)*

26 51 16 00-0342 (T5HO) Fluorescent, High Bay Fixtures (Lithonia) *(26 51 16 00-0341)*

Note: For 8' fixture, use two (2) 4' fixtures.

26 51 16 00-0343	EA	2 T5HO Lamps, 4' Length, Fluorescent High Bay Fixture (Lithonia FGB)	523.68	105.11
		For Wire Guard, Add	*40.50*	
		For Polycarbonate Lens, Add	*47.75*	
		For Acrylic Lens, Add	*54.00*	
26 51 16 00-0344	EA	3 T5HO Lamps, 4' Length, Fluorescent High Bay Fixture (Lithonia FGB)	547.80	116.45
		For Wire Guard, Add	*40.50*	
		For Polycarbonate Lens, Add	*47.75*	
		For Acrylic Lens, Add	*54.00*	
26 51 16 00-0345	EA	4 T5HO Lamps, 4' Length, Fluorescent High Bay Fixture (Lithonia FGB)	624.50	132.93
		For Wire Guard, Add	*40.50*	
		For Polycarbonate Lens, Add	*47.75*	
		For Acrylic Lens, Add	*54.00*	
26 51 16 00-0346	EA	6 T5HO Lamps, 4' Length, Fluorescent High Bay Fixture (Lithonia FGB)	764.50	140.04
		For Wire Guard, Add	*40.50*	
		For Polycarbonate Lens, Add	*47.75*	
		For Acrylic Lens, Add	*54.00*	
26 51 16 00-0347	EA	4 T5HO Lamps, 4' Length, Fluorescent High Bay Fixture (Lithonia IBZ)	499.33	132.93
		For Wire Guard, Add	*40.50*	
		For Polycarbonate Lens, Add	*47.75*	
		For Acrylic Lens, Add	*54.00*	
26 51 16 00-0348	EA	6 T5HO Lamps, 4' Length, Fluorescent High Bay Fixture (Lithonia IBZ)	554.88	140.04
		For Wire Guard, Add	*40.50*	
		For Polycarbonate Lens, Add	*47.75*	
		For Acrylic Lens, Add	*54.00*	
26 51 16 00-0349	EA	8 T5HO Lamps, 4' Length, Fluorescent High Bay Fixture (Lithonia IBZ)	656.05	146.54
		For Wire Guard, Add	*40.50*	
		For Polycarbonate Lens, Add	*47.75*	
		For Acrylic Lens, Add	*54.00*	

26 51 19 LED Interior Lighting *(26 51)*

26 51 19 00-0001 LED Fixtures *(26 51 19)*

26 51 19 00-0002 Undercabinet LED Fixtures *(26 51 19 00-0001)*

26 51 19 00-0003	EA	12" Length, Undercabinet/Modular General Purpose LED Fixture (Lithonia RAZ12-M6)	137.77	27.83
		For >50 To 100, Deduct	*-4.60*	
		For >100 To 250, Deduct	*-8.05*	
		For >250 To 500, Deduct	*-13.78*	
		For >500, Deduct	*-19.51*	
26 51 19 00-0004	EA	18" Length, Undercabinet/Modular General Purpose LED Fixture (Lithonia RAZ18-M6)	170.39	34.00
		For >50 To 100, Deduct	*-5.68*	
		For >100 To 250, Deduct	*-9.94*	
		For >250 To 500, Deduct	*-17.04*	
		For >500, Deduct	*-24.14*	
26 51 19 00-0005	EA	24" Length, Undercabinet/Modular General Purpose LED Fixture (Lithonia RAZ24-M6)	170.83	34.00
		For >50 To 100, Deduct	*-5.69*	
		For >100 To 250, Deduct	*-9.96*	
		For >250 To 500, Deduct	*-17.08*	
		For >500, Deduct	*-24.21*	
26 51 19 00-0006	EA	9" Length x 3-1/2 Width x 1" Depth, Undercabinet/Modular General Purpose LED Fixture (Progressive P7002)	126.55	27.83
		For >50 To 100, Deduct	*-4.32*	
		For >100 To 250, Deduct	*-7.49*	
		For >250 To 500, Deduct	*-12.66*	
		For >500, Deduct	*-17.82*	
26 51 19 00-0007	EA	12" Length x 3-1/2 Width x 1" Depth, Undercabinet/Modular General Purpose LED Fixture (Progressive P7012)	138.54	27.83
		For >50 To 100, Deduct	*-4.62*	
		For >100 To 250, Deduct	*-8.09*	
		For >250 To 500, Deduct	*-13.85*	
		For >500, Deduct	*-19.62*	
26 51 19 00-0008	EA	18" Length x 3-1/2 Width x 1" Depth, Undercabinet/Modular General Purpose LED Fixture (Progressive P7005)	156.77	27.83
		For >50 To 100, Deduct	*-5.08*	
		For >100 To 250, Deduct	*-9.00*	
		For >250 To 500, Deduct	*-15.68*	
		For >500, Deduct	*-22.36*	
26 51 19 00-0009	EA	24" Length x 3-1/2 Width x 1" Depth, Undercabinet/Modular General Purpose LED Fixture (Progressive P7013)	174.43	27.83
		For >50 To 100, Deduct	*-5.52*	
		For >100 To 250, Deduct	*-9.88*	
		For >250 To 500, Deduct	*-17.44*	
		For >500, Deduct	*-25.01*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0010	EA	24" HIDE-A-LITE V Series LED Undercabinet Fixture (Progress Lighting P700003-028-30)	166.00	27.83
		For >50 To 100, Deduct	*-5.31*	
		For >100 To 250, Deduct	*-9.46*	
		For >250 To 500, Deduct	*-16.60*	
		For >500, Deduct	*-23.74*	
26 51 19 00-0011		**Surface Mount Linear/Striplight LED Fixtures** *(26 51 19 00-0001)*		
26 51 19 00-0012		**Striplight LED Fixtures (Lithonia CLX)** *(26 51 19 00-0011)*		
		Note: Standard efficiency, flat or round diffuse lens, 120-277 volt, 0-10 volt dimming, 3000K to 5000K color temperature, 80CRI		
26 51 19 00-0013	EA	2' Length, 1,500 Lumens, LED Striplight Fixture (Lithonia CLX) Note: With integral occupancy sensor	216.72	30.91
26 51 19 00-0014	EA	2' Length, 2,000 Lumens, LED Striplight Fixture (Lithonia CLX) Note: With integral occupancy sensor	222.66	30.91
26 51 19 00-0015	EA	4' Length, 3,000 Lumens, LED Striplight Fixture (Lithonia CLX) Note: With integral occupancy sensor	256.74	37.71
26 51 19 00-0016	EA	4' Length, 4,000 Lumens, LED Striplight Fixture (Lithonia CLX) Note: With integral occupancy sensor	262.70	37.71
26 51 19 00-0017	EA	4' Length, 5,000 Lumens, LED Striplight Fixture (Lithonia CLX) Note: With integral occupancy sensor	268.65	37.71
26 51 19 00-0018	EA	4' Length, 7,000 Lumens, LED Striplight Fixture (Lithonia CLX) Note: With integral occupancy sensor	274.59	37.71
26 51 19 00-0019	EA	4' Length, 9,000 Lumens, LED Striplight Fixture (Lithonia CLX) Note: With integral occupancy sensor	280.54	37.71
26 51 19 00-0020	EA	8' Length, 6,000 Lumens, LED Striplight Fixture (Lithonia CLX) Note: With integral occupancy sensor	359.23	44.62
26 51 19 00-0021	EA	8' Length, 8,000 Lumens, LED Striplight Fixture (Lithonia CLX) Note: With integral occupancy sensor	371.13	44.62
26 51 19 00-0022	EA	8' Length, 10,000 Lumens, LED Striplight Fixture (Lithonia CLX) Note: With integral occupancy sensor	384.51	44.62
26 51 19 00-0023	EA	8' Length, 14,000 Lumens, LED Striplight Fixture (Lithonia CLX) Note: With integral occupancy sensor	396.41	44.62
26 51 19 00-0024	EA	8' Length, 18,000 Lumens, LED Striplight Fixture (Lithonia CLX) Note: With integral occupancy sensor	409.79	44.62
26 51 19 00-0025	EA	8' Length, 20,000 Lumens, LED Striplight Fixture (Lithonia CLX) Note: With integral occupancy sensor	421.68	44.62
26 51 19 00-0026		**Striplight LED Fixtures (Lithonia ZL)** *(26 51 19 00-0011)*		
26 51 19 00-0027	EA	3,000 Lumens, 2' Length, LED Striplight Fixture (Lithonia ZL1)	223.27	30.91
		For >50 To 100, Deduct	*-6.74*	
		For >100 To 250, Deduct	*-12.32*	
		For >250 To 500, Deduct	*-22.33*	
		For >500, Deduct	*-32.33*	
26 51 19 00-0028	EA	2,800 Lumens, 4' Length, LED Striplight Fixture (Lithonia ZL1)	233.57	37.71
		For >50 To 100, Deduct	*-7.26*	
		For >100 To 250, Deduct	*-13.10*	
		For >250 To 500, Deduct	*-23.36*	
		For >500, Deduct	*-33.62*	
26 51 19 00-0029	EA	1,400 Lumens, 2' Length, Lensed LED Striplight Fixture (Lithonia ZL2)	266.03	30.91
		For >50 To 100, Deduct	*-7.81*	
		For >100 To 250, Deduct	*-14.46*	
		For >250 To 500, Deduct	*-26.60*	
		For >500, Deduct	*-38.75*	
26 51 19 00-0030	EA	2,300 Lumens, 4' Length, Lensed LED Striplight Fixture (Lithonia ZL2)	276.33	37.71
		For >50 To 100, Deduct	*-8.33*	
		For >100 To 250, Deduct	*-15.23*	
		For >250 To 500, Deduct	*-27.63*	
		For >500, Deduct	*-40.03*	
26 51 19 00-0031	EA	4,600 Lumens, 4' Length, Lensed LED Striplight Fixture (Lithonia ZL2)	348.58	37.71
		For >50 To 100, Deduct	*-10.13*	
		For >100 To 250, Deduct	*-18.85*	
		For >250 To 500, Deduct	*-34.86*	
		For >500, Deduct	*-50.87*	
26 51 19 00-0032	EA	3,000 Lumens, 4' Length, Lensed LED Striplight Fixture (Lithonia ZL2N)	265.41	68.74
		For >50 To 100, Deduct	*-9.21*	
		For >100 To 250, Deduct	*-15.85*	
		For >250 To 500, Deduct	*-26.54*	
		For >500, Deduct	*-37.24*	
26 51 19 00-0033		**Striplight LED Fixtures (Lithonia ZL1D)** *(26 51 19 00-0011)*		
26 51 19 00-0034	EA	1,985 Lumens, 17 Watt, 2' Length, 3000K CCT, LED Striplight (Lithonia Lighting ZL1D L24 1500LM MVOLT 30K 80CRI)	174.26	30.91
		For >50 To 100, Deduct	*-5.52*	
		For >100 To 250, Deduct	*-9.87*	
		For >250 To 500, Deduct	*-17.43*	
		For >500, Deduct	*-24.98*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0035	EA	2,030 Lumens, 17 Watt, 2' Length, 3500K CCT, LED Striplight (Lithonia Lighting ZL1D L24 1500LM MVOLT 35K 80CRI)	174.26	30.91
		For >50 To 100, Deduct	*-5.52*	
		For >100 To 250, Deduct	*-9.87*	
		For >250 To 500, Deduct	*-17.43*	
		For >500, Deduct	*-24.98*	
26 51 19 00-0036	EA	2,061 Lumens, 17 Watt, 2' Length, 4000K CCT, LED Striplight (Lithonia Lighting ZL1D L24 1500LM MVOLT 40K 80CRI)	174.26	30.91
		For >50 To 100, Deduct	*-5.52*	
		For >100 To 250, Deduct	*-9.87*	
		For >250 To 500, Deduct	*-17.43*	
		For >500, Deduct	*-24.98*	
26 51 19 00-0037	EA	2,137 Lumens, 17 Watt, 2' Length, 5000K CCT, LED Striplight (Lithonia Lighting ZL1D L24 1500LM MVOLT 50K 80CRI)	174.26	30.91
		For >50 To 100, Deduct	*-5.52*	
		For >100 To 250, Deduct	*-9.87*	
		For >250 To 500, Deduct	*-17.43*	
		For >500, Deduct	*-24.98*	
26 51 19 00-0038	EA	2,682 Lumens, 22 Watt, 2' Length, 3000K CCT, LED Striplight (Lithonia Lighting ZL1D L24 2500LM MVOLT 30K 80CRI)	197.56	30.91
		For >50 To 100, Deduct	*-6.10*	
		For >100 To 250, Deduct	*-11.04*	
		For >250 To 500, Deduct	*-19.76*	
		For >500, Deduct	*-28.47*	
26 51 19 00-0039	EA	2,742 Lumens, 22 Watt, 2' Length, 3500K CCT, LED Striplight (Lithonia Lighting ZL1D L24 2500LM MVOLT 35K 80CRI)	197.56	30.91
		For >50 To 100, Deduct	*-6.10*	
		For >100 To 250, Deduct	*-11.04*	
		For >250 To 500, Deduct	*-19.76*	
		For >500, Deduct	*-28.47*	
26 51 19 00-0040	EA	2,785 Lumens, 22 Watt, 2' Length, 4000K CCT, LED Striplight (Lithonia Lighting ZL1D L24 2500LM MVOLT 40K 80CRI)	197.56	30.91
		For >50 To 100, Deduct	*-6.10*	
		For >100 To 250, Deduct	*-11.04*	
		For >250 To 500, Deduct	*-19.76*	
		For >500, Deduct	*-28.47*	
26 51 19 00-0041	EA	2,887 Lumens, 22 Watt, 2' Length, 5000K CCT, LED Striplight (Lithonia Lighting ZL1D L24 2500LM MVOLT 50K 80CRI)	197.56	30.91
		For >50 To 100, Deduct	*-6.10*	
		For >100 To 250, Deduct	*-11.04*	
		For >250 To 500, Deduct	*-19.76*	
		For >500, Deduct	*-28.47*	
26 51 19 00-0042	EA	4,099 Lumens, 36 Watt, 2' Length, 3000K CCT, LED Striplight (Lithonia Lighting ZL1D L24 3500LM MVOLT 30K 80CRI)	209.15	30.91
		For >50 To 100, Deduct	*-6.39*	
		For >100 To 250, Deduct	*-11.62*	
		For >250 To 500, Deduct	*-20.92*	
		For >500, Deduct	*-30.21*	
26 51 19 00-0043	EA	4,190 Lumens, 36 Watt, 2' Length, 3500K CCT, LED Striplight (Lithonia Lighting ZL1D L24 3500LM MVOLT 35K 80CRI)	209.15	30.91
		For >50 To 100, Deduct	*-6.39*	
		For >100 To 250, Deduct	*-11.62*	
		For >250 To 500, Deduct	*-20.92*	
		For >500, Deduct	*-30.21*	
26 51 19 00-0044	EA	4,255 Lumens, 36 Watt, 2' Length, 4000K CCT, LED Striplight (Lithonia Lighting ZL1D L24 3500LM MVOLT 40K 80CRI)	209.15	30.91
		For >50 To 100, Deduct	*-6.39*	
		For >100 To 250, Deduct	*-11.62*	
		For >250 To 500, Deduct	*-20.92*	
		For >500, Deduct	*-30.21*	
26 51 19 00-0045	EA	4,412 Lumens, 36 Watt, 2' Length, 5000K CCT, LED Striplight (Lithonia Lighting ZL1D L24 3500LM MVOLT 50K 80CRI)	209.15	30.91
		For >50 To 100, Deduct	*-6.39*	
		For >100 To 250, Deduct	*-11.62*	
		For >250 To 500, Deduct	*-20.92*	
		For >500, Deduct	*-30.21*	
26 51 19 00-0046	EA	3,880 Lumens, 30 Watt, 4' Length, 3000K CCT, LED Striplight (Lithonia Lighting ZL1D L48 3000LM MVOLT 30K 80CRI)	238.02	37.71
		For >50 To 100, Deduct	*-7.37*	
		For >100 To 250, Deduct	*-13.32*	
		For >250 To 500, Deduct	*-23.80*	
		For >500, Deduct	*-34.29*	
26 51 19 00-0047	EA	3,966 Lumens, 30 Watt, 4' Length, 3500K CCT, LED Striplight (Lithonia Lighting ZL1D L48 3000LM MVOLT 35K 80CRI)	238.02	37.71
		For >50 To 100, Deduct	*-7.37*	
		For >100 To 250, Deduct	*-13.32*	
		For >250 To 500, Deduct	*-23.80*	
		For >500, Deduct	*-34.29*	
26 51 19 00-0048	EA	4,028 Lumens, 30 Watt, 4' Length, 4000K CCT, LED Striplight (Lithonia Lighting ZL1D L48 3000LM MVOLT 40K 80CRI)	238.02	37.71
		For >50 To 100, Deduct	*-7.37*	
		For >100 To 250, Deduct	*-13.32*	
		For >250 To 500, Deduct	*-23.80*	
		For >500, Deduct	*-34.29*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0049	EA	4,176 Lumens, 30 Watt, 4' Length, 5000K CCT, LED Striplight (Lithonia Lighting ZL1D L48 3000LM MVOLT 50K 80CRI)	238.02	37.71
		For >50 To 100, Deduct	*-7.37*	
		For >100 To 250, Deduct	*-13.32*	
		For >250 To 500, Deduct	*-23.80*	
		For >500, Deduct	*-34.29*	
26 51 19 00-0050	EA	5,337 Lumens, 41 Watt, 4' Length, 3000K CCT, LED Striplight (Lithonia Lighting ZL1D L48 5000LM MVOLT 30K 80CRI)	249.60	37.71
		For >50 To 100, Deduct	*-7.66*	
		For >100 To 250, Deduct	*-13.90*	
		For >250 To 500, Deduct	*-24.96*	
		For >500, Deduct	*-36.02*	
26 51 19 00-0051	EA	5,456 Lumens, 41 Watt, 4' Length, 3500K CCT, LED Striplight (Lithonia Lighting ZL1D L48 5000LM MVOLT 35K 80CRI)	249.60	37.71
		For >50 To 100, Deduct	*-7.66*	
		For >100 To 250, Deduct	*-13.90*	
		For >250 To 500, Deduct	*-24.96*	
		For >500, Deduct	*-36.02*	
26 51 19 00-0052	EA	5,541 Lumens, 41 Watt, 4' Length, 4000K CCT, LED Striplight (Lithonia Lighting ZL1D L48 5000LM MVOLT 40K 80CRI)	249.60	37.71
		For >50 To 100, Deduct	*-7.66*	
		For >100 To 250, Deduct	*-13.90*	
		For >250 To 500, Deduct	*-24.96*	
		For >500, Deduct	*-36.02*	
26 51 19 00-0053	EA	5,745 Lumens, 41 Watt, 4' Length, 5000K CCT, LED Striplight (Lithonia Lighting ZL1D L48 5000LM MVOLT 50K 80CRI)	249.60	37.71
		For >50 To 100, Deduct	*-7.66*	
		For >100 To 250, Deduct	*-13.90*	
		For >250 To 500, Deduct	*-24.96*	
		For >500, Deduct	*-36.02*	
26 51 19 00-0054	EA	7,317 Lumens, 59 Watt, 4' Length, 3000K CCT, LED Striplight (Lithonia Lighting ZL1D L48 7000LM MVOLT 30K 80CRI)	261.20	37.71
		For >50 To 100, Deduct	*-7.95*	
		For >100 To 250, Deduct	*-14.48*	
		For >250 To 500, Deduct	*-26.12*	
		For >500, Deduct	*-37.76*	
26 51 19 00-0055	EA	7,480 Lumens, 59 Watt, 4' Length, 3500K CCT, LED Striplight (Lithonia Lighting ZL1D L48 7000LM MVOLT 35K 80CRI)	261.20	37.71
		For >50 To 100, Deduct	*-7.95*	
		For >100 To 250, Deduct	*-14.48*	
		For >250 To 500, Deduct	*-26.12*	
		For >500, Deduct	*-37.76*	
26 51 19 00-0056	EA	7,596 Lumens, 59 Watt, 4' Length, 4000K CCT, LED Striplight (Lithonia Lighting ZL1D L48 7000LM MVOLT 40K 80CRI)	261.20	37.71
		For >50 To 100, Deduct	*-7.95*	
		For >100 To 250, Deduct	*-14.48*	
		For >250 To 500, Deduct	*-26.12*	
		For >500, Deduct	*-37.76*	
26 51 19 00-0057	EA	7,876 Lumens, 59 Watt, 4' Length, 5000K CCT, LED Striplight (Lithonia Lighting ZL1D L48 7000LM MVOLT 50K 80CRI)	261.20	37.71
		For >50 To 100, Deduct	*-7.95*	
		For >100 To 250, Deduct	*-14.48*	
		For >250 To 500, Deduct	*-26.12*	
		For >500, Deduct	*-37.76*	

26 51 19 00-0058 Striplight LED Fixtures (Lithonia TZL1D) *(26 51 19 00-0011)*

26 51 19 00-0059	EA	8,077 Lumens, 60 Watt, 8' Length, 3000K CCT, LED Striplight (Lithonia Lighting TZL1D L96 6000LM MVOLT 30K 80CRI)	429.66	44.62
		For >50 To 100, Deduct	*-12.42*	
		For >100 To 250, Deduct	*-23.16*	
		For >250 To 500, Deduct	*-42.97*	
		For >500, Deduct	*-62.77*	
26 51 19 00-0060	EA	8,257 Lumens, 60 Watt, 8' Length, 3500K CCT, LED Striplight (Lithonia Lighting TZL1D L96 6000LM MVOLT 35K 80CRI)	429.66	44.62
		For >50 To 100, Deduct	*-12.42*	
		For >100 To 250, Deduct	*-23.16*	
		For >250 To 500, Deduct	*-42.97*	
		For >500, Deduct	*-62.77*	
26 51 19 00-0061	EA	8,386 Lumens, 60 Watt, 8' Length, 4000K CCT, LED Striplight (Lithonia Lighting TZL1D L96 6000LM MVOLT 40K 80CRI)	429.66	44.62
		For >50 To 100, Deduct	*-12.42*	
		For >100 To 250, Deduct	*-23.16*	
		For >250 To 500, Deduct	*-42.97*	
		For >500, Deduct	*-62.77*	
26 51 19 00-0062	EA	8,694 Lumens, 60 Watt, 8' Length, 5000K CCT, LED Striplight (Lithonia Lighting TZL1D L96 6000LM MVOLT 50K 80CRI)	429.66	44.62
		For >50 To 100, Deduct	*-12.42*	
		For >100 To 250, Deduct	*-23.16*	
		For >250 To 500, Deduct	*-42.97*	
		For >500, Deduct	*-62.77*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0063	EA	11,021 Lumens, 81 Watt, 8' Length, 3000K CCT, LED Striplight (Lithonia Lighting TZL1D L96 10000LM MVOLT 30K 80CRI)	452.84	44.62
		For >50 To 100, Deduct	*-13.00*	
		For >100 To 250, Deduct	*-24.32*	
		For >250 To 500, Deduct	*-45.28*	
		For >500, Deduct	*-66.25*	
26 51 19 00-0064	EA	11,267 Lumens, 81 Watt, 8' Length, 3500K CCT, LED Striplight (Lithonia Lighting TZL1D L96 10000LM MVOLT 35K 80CRI)	452.84	44.62
		For >50 To 100, Deduct	*-13.00*	
		For >100 To 250, Deduct	*-24.32*	
		For >250 To 500, Deduct	*-45.28*	
		For >500, Deduct	*-66.25*	
26 51 19 00-0065	EA	11,442 Lumens, 81 Watt, 8' Length, 4000K CCT, LED Striplight (Lithonia Lighting TZL1D L96 10000LM MVOLT 40K 80CRI)	452.84	44.62
		For >50 To 100, Deduct	*-13.00*	
		For >100 To 250, Deduct	*-24.32*	
		For >250 To 500, Deduct	*-45.28*	
		For >500, Deduct	*-66.25*	
26 51 19 00-0066	EA	11,864 Lumens, 81 Watt, 8' Length, 5000K CCT, LED Striplight (Lithonia Lighting TZL1D L96 10000LM MVOLT 50K 80CRI)	452.84	44.62
		For >50 To 100, Deduct	*-13.00*	
		For >100 To 250, Deduct	*-24.32*	
		For >250 To 500, Deduct	*-45.28*	
		For >500, Deduct	*-66.25*	
26 51 19 00-0067	EA	15,397 Lumens, 121 Watt, 8' Length, 3000K CCT, LED Striplight (Lithonia Lighting TZL1D L96 14000LM MVOLT 30K 80CRI)	476.15	44.62
		For >50 To 100, Deduct	*-13.58*	
		For >100 To 250, Deduct	*-25.48*	
		For >250 To 500, Deduct	*-47.62*	
		For >500, Deduct	*-69.75*	
26 51 19 00-0068	EA	15,741 Lumens, 121 Watt, 8' Length, 3500K CCT, LED Striplight (Lithonia Lighting TZL1D L96 14000LM MVOLT 35K 80CRI)	476.15	44.62
		For >50 To 100, Deduct	*-13.58*	
		For >100 To 250, Deduct	*-25.48*	
		For >250 To 500, Deduct	*-47.62*	
		For >500, Deduct	*-69.75*	
26 51 19 00-0069	EA	15,986 Lumens, 121 Watt, 8' Length, 4000K CCT, LED Striplight (Lithonia Lighting TZL1D L96 14000LM MVOLT 40K 80CRI)	476.15	44.62
		For >50 To 100, Deduct	*-13.58*	
		For >100 To 250, Deduct	*-25.48*	
		For >250 To 500, Deduct	*-47.62*	
		For >500, Deduct	*-69.75*	
26 51 19 00-0070	EA	16,574 Lumens, 121 Watt, 8' Length, 5000K CCT, LED Striplight (Lithonia Lighting TZL1D L96 14000LM MVOLT 50K 80CRI)	476.15	44.62
		For >50 To 100, Deduct	*-13.58*	
		For >100 To 250, Deduct	*-25.48*	
		For >250 To 500, Deduct	*-47.62*	
		For >500, Deduct	*-69.75*	

26 51 19 00-0071 Striplight LED Fixtures (Mobern) *(26 51 19 00-0011)*

26 51 19 00-0072	EA	1,100 Lumens, 12 Watt, 2' Length, Chrome, LED Bracket Fixture (Mobern 7924LED12DMV30)	226.41	30.91
		For >50 To 100, Deduct	*-6.82*	
		For >100 To 250, Deduct	*-12.48*	
		For >250 To 500, Deduct	*-22.64*	
		For >500, Deduct	*-32.80*	

26 51 19 00-0073 Striplight LED Fixtures (Eaton) *(26 51 19 00-0011)*

26 51 19 00-0074	EA	2,301 Lumens, 18 Watt, 4' Length, LED Strip Lighting (Eaton Lighting 4SNLED-LD4-22SL-LC-UNV-L840-CD1-U)	288.28	37.71
		For >50 To 100, Deduct	*-8.62*	
		For >100 To 250, Deduct	*-15.83*	
		For >250 To 500, Deduct	*-28.83*	
		For >500, Deduct	*-41.83*	
26 51 19 00-0075	EA	2,382 Lumens, 16 Watt, 4' Length, LED Clear Lensed Striplight (Cooper Industries 4SNLED-LD5-22SL-LC-UNV-L840-CD1-U)	271.38	37.71
		For >50 To 100, Deduct	*-8.20*	
		For >100 To 250, Deduct	*-14.99*	
		For >250 To 500, Deduct	*-27.14*	
		For >500, Deduct	*-39.29*	
26 51 19 00-0076	EA	2,382 Lumens, 16 Watt, 4' Length, Clear Lens, LED Striplight (Cooper Industries Metalux Series 4SNLED-LD5-22SL-LC-UNV-830-CD1-U)	288.28	37.71
		For >50 To 100, Deduct	*-8.62*	
		For >100 To 250, Deduct	*-15.83*	
		For >250 To 500, Deduct	*-28.83*	
		For >500, Deduct	*-41.83*	

26 51 19 00-0077 Striplight LED Fixtures (FSC LCS) *(26 51 19 00-0011)*

26 51 19 00-0078	EA	1,746 Lumens, 12 Watt, 2' Length, LED Industrial Strip (FSC LCS)	338.31	30.91
		For >50 To 100, Deduct	*-9.62*	
		For >100 To 250, Deduct	*-18.08*	
		For >250 To 500, Deduct	*-33.83*	
		For >500, Deduct	*-49.59*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0079	EA	6,355 Lumens, 50 Watt, 4' Length, LED Industrial Strip (FSC LCS)	559.51	38.12
		For >50 To 100, Deduct	*-15.40*	
		For >100 To 250, Deduct	*-29.39*	
		For >250 To 500, Deduct	*-55.95*	
		For >500, Deduct	*-82.51*	
26 51 19 00-0080	EA	6,355 Lumens, 50 Watt, 8' Length, LED Industrial Strip (FSC LCS)	632.17	44.62
		For >50 To 100, Deduct	*-17.48*	
		For >100 To 250, Deduct	*-33.28*	
		For >250 To 500, Deduct	*-63.22*	
		For >500, Deduct	*-93.15*	
26 51 19 00-0081		**Striplight LED Fixtures (Globalux LCS)** *(26 51 19 00-0011)*		
26 51 19 00-0082	EA	7,035 Lumens, 68 Watt, 8' Length, LED Industrial Strip (Globalux LCS)	249.43	44.62
		For >50 To 100, Deduct	*-7.91*	
		For >100 To 250, Deduct	*-14.15*	
		For >250 To 500, Deduct	*-24.94*	
		For >500, Deduct	*-35.74*	
26 51 19 00-0083	EA	10,093 Lumens, 104 Watt, 8' Length, LED Industrial Strip (Globalux LCS)	319.71	44.62
		For >50 To 100, Deduct	*-9.67*	
		For >100 To 250, Deduct	*-17.66*	
		For >250 To 500, Deduct	*-31.97*	
		For >500, Deduct	*-46.28*	
26 51 19 00-0084		**Striplight LED Fixture (GreenCreative STRIPDIM)** *(26 51 19 00-0011)*		
26 51 19 00-0085	EA	4' Strip, 22.5 Watt, 3000K CCT, LED Strip Fixture (GreenCreative 22.5STRIPDIM/830/277V)	170.83	37.71
		For >50 To 100, Deduct	*-5.69*	
		For >100 To 250, Deduct	*-9.96*	
		For >250 To 500, Deduct	*-17.08*	
		For >500, Deduct	*-24.21*	
26 51 19 00-0086	EA	4' Strip, 22.5 Watt, 3500K CCT, LED Strip Fixture (GreenCreative 22.5STRIPDIM/835/277V)	170.83	37.71
		For >50 To 100, Deduct	*-5.69*	
		For >100 To 250, Deduct	*-9.96*	
		For >250 To 500, Deduct	*-17.08*	
		For >500, Deduct	*-24.21*	
26 51 19 00-0087	EA	4' Strip, 22.5 Watt, 4000K CCT, LED Strip Fixture (GreenCreative 22.5STRIPDIM/840/277V)	170.83	37.71
		For >50 To 100, Deduct	*-5.69*	
		For >100 To 250, Deduct	*-9.96*	
		For >250 To 500, Deduct	*-17.08*	
		For >500, Deduct	*-24.21*	
26 51 19 00-0088	EA	4' Strip, 22.5 Watt, 5000K CCT, LED Strip Fixture (GreenCreative 22.5STRIPDIM/850/277V)	170.83	37.71
		For >50 To 100, Deduct	*-5.69*	
		For >100 To 250, Deduct	*-9.96*	
		For >250 To 500, Deduct	*-17.08*	
		For >500, Deduct	*-24.21*	
26 51 19 00-0089	EA	4' Strip, 38.5 Watt, 3000K CCT, LED Strip Fixture (GreenCreative 38.5STRIPDIM/830/277V)	215.69	37.71
		For >50 To 100, Deduct	*-6.81*	
		For >100 To 250, Deduct	*-12.20*	
		For >250 To 500, Deduct	*-21.57*	
		For >500, Deduct	*-30.94*	
26 51 19 00-0090	EA	4' Strip, 38.5 Watt, 3500K CCT, LED Strip Fixture (GreenCreative 38.5STRIPDIM/835/277V)	215.69	37.71
		For >50 To 100, Deduct	*-6.81*	
		For >100 To 250, Deduct	*-12.20*	
		For >250 To 500, Deduct	*-21.57*	
		For >500, Deduct	*-30.94*	
26 51 19 00-0091	EA	4' Strip, 38.5 Watt, 4000K CCT, LED Strip Fixture (GreenCreative 38.5STRIPDIM/840/277V)	215.69	37.71
		For >50 To 100, Deduct	*-6.81*	
		For >100 To 250, Deduct	*-12.20*	
		For >250 To 500, Deduct	*-21.57*	
		For >500, Deduct	*-30.94*	
26 51 19 00-0092	EA	4' Strip, 38.5 Watt, 5000K CCT, LED Strip Fixture (GreenCreative 38.5STRIPDIM/850/277V)	215.69	37.71
		For >50 To 100, Deduct	*-6.81*	
		For >100 To 250, Deduct	*-12.20*	
		For >250 To 500, Deduct	*-21.57*	
		For >500, Deduct	*-30.94*	
26 51 19 00-0093		**Surface Ambient Fixture (Cree LS4)** *(26 51 19 00-0011)*		
26 51 19 00-0094	EA	2,500 Lumens, 23 Watt, 3500K CCT, 4' LED Surface Ambient Fixture (Cree LS4-25L-35K-10V)	219.89	48.02
		For >50 To 100, Deduct	*-7.30*	
		For >100 To 250, Deduct	*-12.80*	
		For >250 To 500, Deduct	*-21.99*	
		For >500, Deduct	*-31.18*	
26 51 19 00-0095	EA	2,500 Lumens, 23 Watt, 4000K CCT, 4' LED Surface Ambient Fixture (Cree LS4-25L-40K-10V)	219.89	48.02
		For >50 To 100, Deduct	*-7.30*	
		For >100 To 250, Deduct	*-12.80*	
		For >250 To 500, Deduct	*-21.99*	
		For >500, Deduct	*-31.18*	
26 51 19 00-0096	EA	2,500 Lumens, 23 Watt, 5000K CCT, 4' LED Surface Ambient Fixture (Cree LS4-25L-50K-10V)	235.37	48.02
		For >50 To 100, Deduct	*-7.69*	
		For >100 To 250, Deduct	*-13.57*	
		For >250 To 500, Deduct	*-23.54*	
		For >500, Deduct	*-33.50*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0097	EA	4,000 Lumens, 44 Watt, 3500K CCT, 4' LED Surface Ambient Fixture (Cree LS4-40L-35K-10V)	220.63	48.02
		For >50 To 100, Deduct	*-7.32*	
		For >100 To 250, Deduct	*-12.84*	
		For >250 To 500, Deduct	*-22.06*	
		For >500, Deduct	*-31.29*	
26 51 19 00-0098	EA	4,000 Lumens, 44 Watt, 4000K CCT, 4' LED Surface Ambient Fixture (Cree LS4-40L-40K-10V)	211.54	48.02
		For >50 To 100, Deduct	*-7.09*	
		For >100 To 250, Deduct	*-12.38*	
		For >250 To 500, Deduct	*-21.15*	
		For >500, Deduct	*-29.93*	
26 51 19 00-0099	EA	4,000 Lumens, 44 Watt, 5000K CCT, 4' LED Surface Ambient Fixture (Cree LS4-40L-50K-10V)	230.04	48.02
		For >50 To 100, Deduct	*-7.55*	
		For >100 To 250, Deduct	*-13.31*	
		For >250 To 500, Deduct	*-23.00*	
		For >500, Deduct	*-32.70*	
26 51 19 00-0100	EA	6,000 Lumens, 60 Watt, 3500K CCT, 4' LED Surface Ambient Fixture (Cree LS4-60L-35K-10V)	252.26	48.02
		For >50 To 100, Deduct	*-8.11*	
		For >100 To 250, Deduct	*-14.42*	
		For >250 To 500, Deduct	*-25.23*	
		For >500, Deduct	*-36.04*	
26 51 19 00-0101	EA	6,000 Lumens, 60 Watt, 4000K CCT, 4' LED Surface Ambient Fixture (Cree LS4-60L-40K-10V)	252.26	48.02
		For >50 To 100, Deduct	*-8.11*	
		For >100 To 250, Deduct	*-14.42*	
		For >250 To 500, Deduct	*-25.23*	
		For >500, Deduct	*-36.04*	
26 51 19 00-0102	EA	6,000 Lumens, 60 Watt, 5000K CCT, 4' LED Surface Ambient Fixture (Cree LS4-60L-50K-10V)	267.74	48.02
		For >50 To 100, Deduct	*-8.50*	
		For >100 To 250, Deduct	*-15.19*	
		For >250 To 500, Deduct	*-26.77*	
		For >500, Deduct	*-38.36*	

26 51 19 00-0103 Suspended Linear LED Fixtures *(26 51 19 00-0001)*

26 51 19 00-0104 Suspended, Pendant Mounted, Linear LED Fixtures (Lithonia GRD) *(26 51 19 00-0103)*

26 51 19 00-0105	EA	3,303 Lumens, 25 Watt, 4' Length, 3000K CCT, 4' Length, Grad Linear, Suspended LED Light (Lithonia Lighting GRD LSL MSL4 30K ID800LMF)	745.95	37.71
		For >50 To 100, Deduct	*-20.07*	
		For >100 To 250, Deduct	*-38.71*	
		For >250 To 500, Deduct	*-74.60*	
		For >500, Deduct	*-110.48*	
26 51 19 00-0106	EA	3,401 Lumens, 25 Watt, 4' Length, 3500K CCT, Grad Linear, Suspended LED Light (Lithonia Lighting GRD LSL MSL4 35K ID800LMF)	745.95	37.71
		For >50 To 100, Deduct	*-20.07*	
		For >100 To 250, Deduct	*-38.71*	
		For >250 To 500, Deduct	*-74.60*	
		For >500, Deduct	*-110.48*	
26 51 19 00-0107	EA	3,456 Lumens, 25 Watt, 4' Length, 4000K CCT, Grad Linear, Suspended LED Light (Lithonia Lighting GRD LSL MSL4 40K ID800LMF)	745.95	37.71
		For >50 To 100, Deduct	*-20.07*	
		For >100 To 250, Deduct	*-38.71*	
		For >250 To 500, Deduct	*-74.60*	
		For >500, Deduct	*-110.48*	
26 51 19 00-0108	EA	4,033 Lumens, 32 Watt, 4' Length, 3000K CCT, Grad Linear, Suspended LED Light (Lithonia Lighting GRD LSL MSL4 30K ID1000LMF)	745.95	37.71
		For >50 To 100, Deduct	*-20.07*	
		For >100 To 250, Deduct	*-38.71*	
		For >250 To 500, Deduct	*-74.60*	
		For >500, Deduct	*-110.48*	
26 51 19 00-0109	EA	4,153 Lumens, 32 Watt, 4' Length, 3500K CCT, Grad Linear, Suspended LED Light (Lithonia Lighting GRD LSL MSL4 35K ID1000LMF)	745.95	37.71
		For >50 To 100, Deduct	*-20.07*	
		For >100 To 250, Deduct	*-38.71*	
		For >250 To 500, Deduct	*-74.60*	
		For >500, Deduct	*-110.48*	
26 51 19 00-0110	EA	4,220 Lumens, 32 Watt, 4' Length, 4000K CCT, Grad Linear, Suspended LED Light (Lithonia Lighting GRD LSL MSL4 40K ID1000LMF)	745.95	37.71
		For >50 To 100, Deduct	*-20.07*	
		For >100 To 250, Deduct	*-38.71*	
		For >250 To 500, Deduct	*-74.60*	
		For >500, Deduct	*-110.48*	
26 51 19 00-0111	EA	4,843 Lumens, 40 Watt, 4' Length, 3000K CCT, Grad Linear, Suspended LED Light (Lithonia Lighting GRD LSL MSL4 30K ID1300LMF)	745.95	37.71
		For >50 To 100, Deduct	*-20.07*	
		For >100 To 250, Deduct	*-38.71*	
		For >250 To 500, Deduct	*-74.60*	
		For >500, Deduct	*-110.48*	
26 51 19 00-0112	EA	4,987 Lumens, 40 Watt, 4' Length, 3500K CCT, Grad Linear, Suspended LED Light (Lithonia Lighting GRD LSL MSL4 35K ID1300LMF)	745.95	37.71
		For >50 To 100, Deduct	*-20.07*	
		For >100 To 250, Deduct	*-38.71*	
		For >250 To 500, Deduct	*-74.60*	
		For >500, Deduct	*-110.48*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0113	EA	5,067 Lumens, 40 Watt, 4' Length, 4000K CCT, Grad Linear, Suspended LED Light (Lithonia Lighting GRD LSL MSL4 40K ID1300LMF)	745.95	37.71
		For >50 To 100, Deduct	*-20.07*	
		For >100 To 250, Deduct	*-38.71*	
		For >250 To 500, Deduct	*-74.60*	
		For >500, Deduct	*-110.48*	
26 51 19 00-0114	EA	5,841 Lumens, 51 Watt, 4' Length, 3000K CCT, Grad Linear, Suspended LED Light (Lithonia Lighting GRD LSL MSL4 30K ID1500LMF)	745.95	37.71
		For >50 To 100, Deduct	*-20.07*	
		For >100 To 250, Deduct	*-38.71*	
		For >250 To 500, Deduct	*-74.60*	
		For >500, Deduct	*-110.48*	
26 51 19 00-0115	EA	6,015 Lumens, 51 Watt, 4' Length, 3500K CCT, Grad Linear, Suspended LED Light (Lithonia Lighting GRD LSL MSL4 35K ID1500LMF)	745.95	37.71
		For >50 To 100, Deduct	*-20.07*	
		For >100 To 250, Deduct	*-38.71*	
		For >250 To 500, Deduct	*-74.60*	
		For >500, Deduct	*-110.48*	
26 51 19 00-0116	EA	6,111 Lumens, 51 Watt, 4' Length, 4000K CCT, Grad Linear, Suspended LED Light (Lithonia Lighting GRD LSL MSL4 40K ID1500LMF)	745.95	37.71
		For >50 To 100, Deduct	*-20.07*	
		For >100 To 250, Deduct	*-38.71*	
		For >250 To 500, Deduct	*-74.60*	
		For >500, Deduct	*-110.48*	
26 51 19 00-0117	EA	6,606 Lumens, 50 Watt, 8' Length, 3000K CCT, Grad Linear, Suspended LED Light (Lithonia Lighting GRD LSL MSL8 30K ID800LMF)	1,114.93	44.62
		For >50 To 100, Deduct	*-29.55*	
		For >100 To 250, Deduct	*-57.42*	
		For >250 To 500, Deduct	*-111.49*	
		For >500, Deduct	*-165.57*	
26 51 19 00-0118	EA	6,802 Lumens, 50 Watt, 8' Length, 3500K CCT, Grad Linear, Suspended LED Light (Lithonia Lighting GRD LSL MSL8 35K ID800LMF)	1,114.93	44.62
		For >50 To 100, Deduct	*-29.55*	
		For >100 To 250, Deduct	*-57.42*	
		For >250 To 500, Deduct	*-111.49*	
		For >500, Deduct	*-165.57*	
26 51 19 00-0119	EA	6,912 Lumens, 50 Watt, 8' Length, 4000K CCT, Grad Linear, Suspended LED Light (Lithonia Lighting GRD LSL MSL8 40K ID800LMF)	1,114.93	44.62
		For >50 To 100, Deduct	*-29.55*	
		For >100 To 250, Deduct	*-57.42*	
		For >250 To 500, Deduct	*-111.49*	
		For >500, Deduct	*-165.57*	
26 51 19 00-0120	EA	8,066 Lumens, 64 Watt, 8' Length, 3000K CCT, Grad Linear, Suspended LED Light (Lithonia Lighting GRD LSL MSL8 30K ID1000LMF)	1,114.93	44.62
		For >50 To 100, Deduct	*-29.55*	
		For >100 To 250, Deduct	*-57.42*	
		For >250 To 500, Deduct	*-111.49*	
		For >500, Deduct	*-165.57*	
26 51 19 00-0121	EA	8,303 Lumens, 64 Watt, 8' Length, 3500K CCT, Grad Linear, Suspended LED Light (Lithonia Lighting GRD LSL MSL8 35K ID1000LMF)	1,114.93	44.62
		For >50 To 100, Deduct	*-29.55*	
		For >100 To 250, Deduct	*-57.42*	
		For >250 To 500, Deduct	*-111.49*	
		For >500, Deduct	*-165.57*	
26 51 19 00-0122	EA	8,440 Lumens, 64 Watt, 8' Length, 4000K CCT, Grad Linear, Suspended LED Light (Lithonia Lighting GRD LSL MSL8 40K ID1000LMF)	1,114.93	44.62
		For >50 To 100, Deduct	*-29.55*	
		For >100 To 250, Deduct	*-57.42*	
		For >250 To 500, Deduct	*-111.49*	
		For >500, Deduct	*-165.57*	
26 51 19 00-0123	EA	9,686 Lumens, 80 Watt, 8' Length, 3000K CCT, Grad Linear, Suspended LED Light (Lithonia Lighting GRD LSL MSL8 30K ID1300LMF)	1,114.93	44.62
		For >50 To 100, Deduct	*-29.55*	
		For >100 To 250, Deduct	*-57.42*	
		For >250 To 500, Deduct	*-111.49*	
		For >500, Deduct	*-165.57*	
26 51 19 00-0124	EA	9,974 Lumens, 80 Watt, 8' Length, 3500K CCT, Grad Linear, Suspended LED Light (Lithonia Lighting GRD LSL MSL8 35K ID1300LMF)	1,114.93	44.62
		For >50 To 100, Deduct	*-29.55*	
		For >100 To 250, Deduct	*-57.42*	
		For >250 To 500, Deduct	*-111.49*	
		For >500, Deduct	*-165.57*	
26 51 19 00-0125	EA	10,134 Lumens, 80 Watt, 8' Length, 4000K CCT, Grad Linear, Suspended LED Light (Lithonia Lighting GRD LSL MSL8 40K ID1300LMF)	1,114.93	44.62
		For >50 To 100, Deduct	*-29.55*	
		For >100 To 250, Deduct	*-57.42*	
		For >250 To 500, Deduct	*-111.49*	
		For >500, Deduct	*-165.57*	
26 51 19 00-0126	EA	11,682 Lumens, 102 Watt, 8' Length, 3000K CCT, Grad Linear, Suspended LED Light (Lithonia Lighting GRD LSL MSL8 30K ID1500LMF)	1,114.93	44.62
		For >50 To 100, Deduct	*-29.55*	
		For >100 To 250, Deduct	*-57.42*	
		For >250 To 500, Deduct	*-111.49*	
		For >500, Deduct	*-165.57*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0127	EA	12,030 Lumens, 102 Watt, 8' Length, 3500K CCT, Grad Linear, Suspended LED Light (Lithonia Lighting GRD LSL MSL8 35K ID1500LMF)	1,114.93	44.62
		For >50 To 100, Deduct	*-29.55*	
		For >100 To 250, Deduct	*-57.42*	
		For >250 To 500, Deduct	*-111.49*	
		For >500, Deduct	*-165.57*	
26 51 19 00-0128	EA	12,222 Lumens, 102 Watt, 8' Length, 4000K CCT, Grad Linear, Suspended LED Light (Lithonia Lighting GRD LSL MSL8 40K ID1500LMF)	1,114.93	44.62
		For >50 To 100, Deduct	*-29.55*	
		For >100 To 250, Deduct	*-57.42*	
		For >250 To 500, Deduct	*-111.49*	
		For >500, Deduct	*-165.57*	
26 51 19 00-0129		**Suspended Linear LED Fixtures (Lithonia GRD)** *(26 51 19 00-0103)*		
26 51 19 00-0130	EA	24' Length, 8' Sections, 80 CRI, 3,500K, LED Linear Fixture (Lithonia GRD 24FT MSL8 80 CRI 35K ID800LMF 20/80 MIN1 ZT 120 SCT PDT)	2,204.54	170.03
26 51 19 00-0131		**Lay-In/Troffer LED Fixtures** *(26 51 19 00-0001)*		
26 51 19 00-0132		**Prismatic Lensed, Lay-In/Troffer LED Fixtures** *(26 51 19 00-0131)*		
26 51 19 00-0133		**Prismatic Lensed, Lay-In/Troffer LED Fixtures (Lithonia)** *(26 51 19 00-0132)*		
26 51 19 00-0134	EA	1' x 4', 4,300 Lumens, Prismatic Lensed, Lay-In/Troffer LED Fixture (Lithonia TL4)	619.57	37.41
		For Drywall Or Plaster Ceilings With Frame Kit, Add	*45.15*	
		For >50 To 100, Deduct	*-16.91*	
		For >100 To 250, Deduct	*-32.40*	
		For >250 To 500, Deduct	*-61.96*	
		For >500, Deduct	*-91.52*	
26 51 19 00-0135	EA	2' x 2', 3,300 Lumens, Prismatic Lensed, Lay-In/Troffer LED Fixture (Lithonia 2TL2)	367.52	41.22
		For Drywall Or Plaster Ceilings, Add	*27.82*	
		For >50 To 100, Deduct	*-10.73*	
		For >100 To 250, Deduct	*-19.92*	
		For >250 To 500, Deduct	*-36.75*	
		For >500, Deduct	*-53.58*	
26 51 19 00-0136	EA	2' x 4', 4,600 Lumens, Prismatic Lensed, Lay-In/Troffer LED Fixture (Lithonia 2TL4)	622.93	48.02
		For Drywall Or Plaster Ceilings With Frame Kit, Add	*49.18*	
		For >50 To 100, Deduct	*-17.38*	
		For >100 To 250, Deduct	*-32.95*	
		For >250 To 500, Deduct	*-62.29*	
		For >500, Deduct	*-91.64*	
26 51 19 00-0137		**Prismatic Lensed, Lay-In/Troffer LED Fixtures (Lunera)** *(26 51 19 00-0132)*		
26 51 19 00-0138	EA	1' x 4', 3,200 Lumens, Prismatic Lensed, Lay-In/Troffer LED Fixture (Lunera® 14G4)	897.31	37.41
		For >50 To 100, Deduct	*-23.85*	
		For >100 To 250, Deduct	*-46.28*	
		For >250 To 500, Deduct	*-89.73*	
		For >500, Deduct	*-133.18*	
26 51 19 00-0139	EA	2' x 2', 3,200 Lumens, Prismatic Lensed, Lay-In/Troffer LED Fixture (Lunera® 22G5)	627.24	41.22
		For >50 To 100, Deduct	*-17.23*	
		For >100 To 250, Deduct	*-32.91*	
		For >250 To 500, Deduct	*-62.72*	
		For >500, Deduct	*-92.54*	
26 51 19 00-0140	EA	2' x 4', 4,175 Lumens, Prismatic Lensed, Lay-In/Troffer LED Fixture (Lunera® 24G4)	818.63	48.02
		For >50 To 100, Deduct	*-22.27*	
		For >100 To 250, Deduct	*-42.74*	
		For >250 To 500, Deduct	*-81.86*	
		For >500, Deduct	*-120.99*	
26 51 19 00-0141		**Prismatic Lensed, Lay-In/Troffer LED Fixtures (PlanLED)** *(26 51 19 00-0132)*		
26 51 19 00-0142	EA	2,591 Lumens, 2' x 2', Prismatic Lensed, Lay-In/Troffer LED Fixture (PlanLED FTB4E)	409.45	41.22
		For >50 To 100, Deduct	*-11.78*	
		For >100 To 250, Deduct	*-22.02*	
		For >250 To 500, Deduct	*-40.95*	
		For >500, Deduct	*-59.87*	
26 51 19 00-0143	EA	3,883 Lumens, 2' x 2', Prismatic Lensed, Lay-In/Troffer LED Fixture (PlanLED FTB4E)	454.30	41.22
		For >50 To 100, Deduct	*-12.90*	
		For >100 To 250, Deduct	*-24.26*	
		For >250 To 500, Deduct	*-45.43*	
		For >500, Deduct	*-66.60*	
26 51 19 00-0144	EA	3,700 Lumens, 2' x 2', Prismatic Lensed, Lay-In/Troffer LED Fixture (PlanLED BL220-40)	384.78	41.22
		For >50 To 100, Deduct	*-11.17*	
		For >100 To 250, Deduct	*-20.78*	
		For >250 To 500, Deduct	*-38.48*	
		For >500, Deduct	*-56.17*	
26 51 19 00-0145	EA	4,200 Lumens, 2' x 2', Prismatic Lensed, Lay-In/Troffer LED Fixture (PlanLED BL220-45)	384.78	41.22
		For >50 To 100, Deduct	*-11.17*	
		For >100 To 250, Deduct	*-20.78*	
		For >250 To 500, Deduct	*-38.48*	
		For >500, Deduct	*-56.17*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0146	EA	4,600 Lumens, 2' x 2', Prismatic Lensed, Lay-In/Troffer LED Fixture (PlanLED BL220-50)	413.93	41.22
		For >50 To 100, Deduct	*-11.89*	
		For >100 To 250, Deduct	*-22.24*	
		For >250 To 500, Deduct	*-41.39*	
		For >500, Deduct	*-60.54*	
26 51 19 00-0147		Volumetric, Lay-In/Troffer LED Fixtures *(26 51 19 00-0131)*		
26 51 19 00-0148		Volumetric, Lay-In/Troffer LED Fixtures (Lithonia) *(26 51 19 00-0147)*		
26 51 19 00-0149	EA	1' x 4', 3,000 Lumens, Volumetric, Lay-In/Troffer LED Fixture (Lithonia RTL4)	507.39	37.41
		For Drywall Or Plaster Ceilings, Add	*25.51*	
		For >50 To 100, Deduct	*-14.10*	
		For >100 To 250, Deduct	*-26.79*	
		For >250 To 500, Deduct	*-50.74*	
		For >500, Deduct	*-74.69*	
26 51 19 00-0150	EA	1' x 4', 4,000 Lumens, Volumetric, Lay-In/Troffer LED Fixture (Lithonia RTL4)	625.59	37.41
		For Drywall Or Plaster Ceilings, Add	*25.51*	
		For >50 To 100, Deduct	*-17.06*	
		For >100 To 250, Deduct	*-32.70*	
		For >250 To 500, Deduct	*-62.56*	
		For >500, Deduct	*-92.42*	
26 51 19 00-0151	EA	2' x 2', 2,000 Lumens, Volumetric, Lay-In/Troffer LED Fixture (Lithonia 2RTL2)	487.13	41.22
		For Drywall Or Plaster Ceilings With Frame Kit, Add	*39.81*	
		For >50 To 100, Deduct	*-13.72*	
		For >100 To 250, Deduct	*-25.90*	
		For >250 To 500, Deduct	*-48.71*	
		For >500, Deduct	*-71.52*	
26 51 19 00-0152	EA	2' x 2', 3,300 Lumens, Volumetric, Lay-In/Troffer LED Fixture (Lithonia 2RTL2)	558.93	41.22
		For Drywall Or Plaster Ceilings With Frame Kit, Add	*43.40*	
		For >50 To 100, Deduct	*-15.52*	
		For >100 To 250, Deduct	*-29.49*	
		For >250 To 500, Deduct	*-55.89*	
		For >500, Deduct	*-82.29*	
26 51 19 00-0153	EA	2' x 2', 4,000 Lumens, Volumetric, Lay-In/Troffer LED Fixture (Lithonia 2RTL2)	616.37	41.22
		For >50 To 100, Deduct	*-16.96*	
		For >100 To 250, Deduct	*-32.36*	
		For >250 To 500, Deduct	*-61.64*	
		For >500, Deduct	*-90.91*	
26 51 19 00-0154	EA	2' x 4', 4,000 Lumens, Volumetric, Lay-In/Troffer LED Fixture (Lithonia 2RTL4)	626.68	48.02
		For Drywall Or Plaster Ceilings With Frame Kit, Add	*49.37*	
		For >50 To 100, Deduct	*-17.47*	
		For >100 To 250, Deduct	*-33.14*	
		For >250 To 500, Deduct	*-62.67*	
		For >500, Deduct	*-92.20*	
26 51 19 00-0155	EA	2' x 4', 4,800 Lumens, Volumetric, Lay-In/Troffer LED Fixture (Lithonia 2RTL4)	684.12	48.02
		For Drywall Or Plaster Ceilings With Frame Kit, Add	*52.24*	
		For >50 To 100, Deduct	*-18.91*	
		For >100 To 250, Deduct	*-36.01*	
		For >250 To 500, Deduct	*-68.41*	
		For >500, Deduct	*-100.81*	
26 51 19 00-0156	EA	2' x 4', 6,000 Lumens, Volumetric, Lay-In/Troffer LED Fixture (Lithonia 2RTL4)	741.56	48.02
		For Drywall Or Plaster Ceilings With Frame Kit, Add	*55.11*	
		For >50 To 100, Deduct	*-20.34*	
		For >100 To 250, Deduct	*-38.88*	
		For >250 To 500, Deduct	*-74.16*	
		For >500, Deduct	*-109.43*	
26 51 19 00-0157	EA	2' x 2', 2,000 Lumens, Volumetric, Lay-In/Troffer LED Fixture With Acrylic Linear Prismatic Diffuser (Lithonia 2VTL2)	429.70	41.22
		For Drywall Or Plaster Ceilings With Frame Kit, Add	*36.94*	
		For >50 To 100, Deduct	*-12.29*	
		For >100 To 250, Deduct	*-23.03*	
		For >250 To 500, Deduct	*-42.97*	
		For >500, Deduct	*-62.91*	
26 51 19 00-0158	EA	2' x 2', 3,300 Lumens, Volumetric, Lay-In/Troffer LED Fixture With Acrylic Linear Prismatic Diffuser (Lithonia 2VTL2)	501.49	41.22
		For Drywall Or Plaster Ceilings With Frame Kit, Add	*40.53*	
		For >50 To 100, Deduct	*-14.08*	
		For >100 To 250, Deduct	*-26.62*	
		For >250 To 500, Deduct	*-50.15*	
		For >500, Deduct	*-73.68*	
26 51 19 00-0159	EA	2' x 2', 4,000 Lumens, Volumetric, Lay-In/Troffer LED Fixture With Acrylic Linear Prismatic Diffuser (Lithonia 2VTL2)	544.56	41.22
		For Drywall Or Plaster Ceilings With Frame Kit, Add	*42.69*	
		For >50 To 100, Deduct	*-15.16*	
		For >100 To 250, Deduct	*-28.77*	
		For >250 To 500, Deduct	*-54.46*	
		For >500, Deduct	*-80.14*	
26 51 19 00-0160	EA	2' x 4', 3,000 Lumens, Volumetric, Lay-In/Troffer LED Fixture With Acrylic Linear Prismatic Diffuser (Lithonia 2VTL4)	540.53	48.02
		For Drywall Or Plaster Ceilings With Frame Kit, Add	*45.06*	
		For >50 To 100, Deduct	*-15.32*	
		For >100 To 250, Deduct	*-28.83*	
		For >250 To 500, Deduct	*-54.05*	
		For >500, Deduct	*-79.28*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0161	EA	2' x 4', 4,000 Lumens, Volumetric, Lay-In/Troffer LED Fixture With Acrylic Linear Prismatic Diffuser (Lithonia 2VTL4)	569.24	48.02
		For Drywall Or Plaster Ceilings With Frame Kit, Add	*46.50*	
		For >50 To 100, Deduct	*-16.03*	
		For >100 To 250, Deduct	*-30.27*	
		For >250 To 500, Deduct	*-56.92*	
		For >500, Deduct	*-83.58*	
26 51 19 00-0162	EA	2' x 4', 4,800 Lumens, Volumetric, Lay-In/Troffer LED Fixture With Acrylic Linear Prismatic Diffuser (Lithonia 2VTL4)	626.68	48.02
		For Drywall Or Plaster Ceilings With Frame Kit, Add	*49.37*	
		For >50 To 100, Deduct	*-17.47*	
		For >100 To 250, Deduct	*-33.14*	
		For >250 To 500, Deduct	*-62.67*	
		For >500, Deduct	*-92.20*	

26 51 19 00-0163 Architectural, Lay-In/Troffer LED Fixtures *(26 51 19 00-0131)*

26 51 19 00-0164 Architectural, Lay-In/Troffer LED Fixtures (CREE® CR Series) *(26 51 19 00-0163)*

Note: Includes 120/277 voltage and 20 gauge steel housing assembly. Excludes sensors.

26 51 19 00-0165	EA	1' x 4', 2,200 Lumens, Architectural, Lay-In/Troffer LED Fixture (Cree® CR14-22L-40K-S)	421.79	48.02
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*131.82*	
		For Surface Mount, Add	*224.89*	
		For >50 To 100, Deduct	*-12.35*	
		For >100 To 250, Deduct	*-22.89*	
		For >250 To 500, Deduct	*-42.18*	
		For >500, Deduct	*-61.47*	
26 51 19 00-0166	EA	1' x 4', 3,100 Lumens, Architectural, Lay-In/Troffer LED Fixture (Cree® CR14-31L-30/50K-S)	454.78	48.02
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*131.82*	
		For Surface Mount, Add	*224.89*	
		For >50 To 100, Deduct	*-13.17*	
		For >100 To 250, Deduct	*-24.54*	
		For >250 To 500, Deduct	*-45.48*	
		For >500, Deduct	*-66.41*	
26 51 19 00-0167	EA	1' x 4', 4,000 Lumens, Architectural, Lay-In/Troffer LED Fixture (Cree® CR14-40L-30/50K-S)	454.78	48.02
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*131.82*	
		For Surface Mount, Add	*224.89*	
		For >50 To 100, Deduct	*-13.17*	
		For >100 To 250, Deduct	*-24.54*	
		For >250 To 500, Deduct	*-45.48*	
		For >500, Deduct	*-66.41*	
26 51 19 00-0168	EA	1' x 4', 5,000 Lumens, Architectural, Lay-In/Troffer LED Fixture (Cree® CR14-50L-30/50K-S)	503.46	48.02
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*131.82*	
		For Surface Mount, Add	*224.89*	
		For >50 To 100, Deduct	*-14.39*	
		For >100 To 250, Deduct	*-26.98*	
		For >250 To 500, Deduct	*-50.35*	
		For >500, Deduct	*-73.72*	
26 51 19 00-0169	EA	1' x 4', 3,100 Lumens, Architectural, Lay-In/Troffer LED Fixture (Cree® CR14-31L-35K-S)	401.96	48.43
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*131.82*	
		For Surface Mount, Add	*224.89*	
		For >50 To 100, Deduct	*-11.85*	
		For >100 To 250, Deduct	*-21.90*	
		For >250 To 500, Deduct	*-40.20*	
		For >500, Deduct	*-58.49*	
26 51 19 00-0170	EA	1' x 4', 4,000 Lumens, Architectural, Lay-In/Troffer LED Fixture (Cree® CR14-40L-35K-S)	401.96	48.43
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*131.82*	
		For Surface Mount, Add	*224.89*	
		For >50 To 100, Deduct	*-11.85*	
		For >100 To 250, Deduct	*-21.90*	
		For >250 To 500, Deduct	*-40.20*	
		For >500, Deduct	*-58.49*	
26 51 19 00-0171	EA	1' x 4', 5,000 Lumens, Architectural, Lay-In/Troffer LED Fixture (Cree® CR14-50L-35K-S)	452.22	48.43
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*131.82*	
		For Surface Mount, Add	*224.89*	
		For >50 To 100, Deduct	*-13.11*	
		For >100 To 250, Deduct	*-24.41*	
		For >250 To 500, Deduct	*-45.22*	
		For >500, Deduct	*-66.03*	
26 51 19 00-0172	EA	2' x 2', 2,000 Lumens, 3000K CCT, Architectural, Lay-In/Troffer LED Fixture (Cree® CR22™)	387.09	41.22
		For >50 To 100, Deduct	*-11.22*	
		For >100 To 250, Deduct	*-20.90*	
		For >250 To 500, Deduct	*-38.71*	
		For >500, Deduct	*-56.52*	
26 51 19 00-0173	EA	2' x 2', 2,000 Lumens, 3500K CCT, Architectural, Lay-In/Troffer LED Fixture (Cree® CR22™)	387.09	41.22
		For >50 To 100, Deduct	*-11.22*	
		For >100 To 250, Deduct	*-20.90*	
		For >250 To 500, Deduct	*-38.71*	
		For >500, Deduct	*-56.52*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0174	EA	2' x 2', 2,000 Lumens, 4000K CCT, Architectural, Lay-In/Troffer LED Fixture (Cree® CR22™)	387.09	41.22
		For >50 To 100, Deduct	*-11.22*	
		For >100 To 250, Deduct	*-20.90*	
		For >250 To 500, Deduct	*-38.71*	
		For >500, Deduct	*-56.52*	
26 51 19 00-0175	EA	2' x 2', 2,000 Lumens, 5000K CCT, Architectural, Lay-In/Troffer LED Fixture (Cree® CR22™)	387.09	41.22
		For >50 To 100, Deduct	*-11.22*	
		For >100 To 250, Deduct	*-20.90*	
		For >250 To 500, Deduct	*-38.71*	
		For >500, Deduct	*-56.52*	
26 51 19 00-0176	EA	2' x 2', 2,000 Lumens, Architectural, Lay-In/Troffer LED Fixture (Cree® CR22-20L-30/50K-S) Note: CCT 30K to 50K	392.82	41.22
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*115.23*	
		For Surface Mount, Add	*211.83*	
		For >50 To 100, Deduct	*-11.37*	
		For >100 To 250, Deduct	*-21.19*	
		For >250 To 500, Deduct	*-39.28*	
		For >500, Deduct	*-57.38*	
26 51 19 00-0177	EA	2' x 2', 3,200 Lumens, Architectural, Lay-In/Troffer LED Fixture (Cree® CR22-32L-35/40K-S) Note: CCT 30K to 50K	370.65	41.22
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*115.23*	
		For Surface Mount, Add	*211.83*	
		For >50 To 100, Deduct	*-10.81*	
		For >100 To 250, Deduct	*-20.08*	
		For >250 To 500, Deduct	*-37.07*	
		For >500, Deduct	*-54.05*	
26 51 19 00-0178	EA	2' x 2', 2,000 Lumens, Architectural, Lay-In/Troffer LED Fixture (Cree® CR22-20L-35K-S)	338.99	41.22
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*115.23*	
		For Surface Mount, Add	*211.83*	
		For >50 To 100, Deduct	*-10.02*	
		For >100 To 250, Deduct	*-18.50*	
		For >250 To 500, Deduct	*-33.90*	
		For >500, Deduct	*-49.30*	
26 51 19 00-0179	EA	2' x 2', 3,200 Lumens, Architectural, Lay-In/Troffer LED Fixture (CREE® CR22-32L-30K-S)	371.24	41.22
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*115.23*	
		For Surface Mount, Add	*211.83*	
		For >50 To 100, Deduct	*-10.83*	
		For >100 To 250, Deduct	*-20.11*	
		For >250 To 500, Deduct	*-37.12*	
		For >500, Deduct	*-54.14*	
26 51 19 00-0180	EA	2' x 4', 2,200 Lumens, Architectural, Lay-In/Troffer LED Fixture (Cree® CR24-22L-35/40K-S) Note: CCT 30K to 50K	440.09	48.02
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*134.96*	
		For Surface Mount, Add	*245.31*	
		For >50 To 100, Deduct	*-12.81*	
		For >100 To 250, Deduct	*-23.81*	
		For >250 To 500, Deduct	*-44.01*	
		For >500, Deduct	*-64.21*	
26 51 19 00-0181	EA	2' x 4', 3,100 Lumens, Architectural, Lay-In/Troffer LED Fixture (Cree® CR24-31L-30/50K-S) Note: CCT 30K to 50K	454.78	48.02
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*134.96*	
		For Surface Mount, Add	*245.31*	
		For >50 To 100, Deduct	*-13.17*	
		For >100 To 250, Deduct	*-24.54*	
		For >250 To 500, Deduct	*-45.48*	
		For >500, Deduct	*-66.41*	
26 51 19 00-0182	EA	2' x 4', 4,000 Lumens, Architectural, Lay-In/Troffer LED Fixture (Cree® CR24-40L-30/50K-S) Note: CCT 30K to 50K	454.78	48.02
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*134.96*	
		For Surface Mount, Add	*245.31*	
		For >50 To 100, Deduct	*-13.17*	
		For >100 To 250, Deduct	*-24.54*	
		For >250 To 500, Deduct	*-45.48*	
		For >500, Deduct	*-66.41*	
26 51 19 00-0183	EA	2' x 4', 3,100 Lumens, Architectural, Lay-In/Troffer LED Fixture (Cree® CR24-31L-35K-S)	421.36	48.43
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*134.96*	
		For Surface Mount, Add	*245.31*	
		For >50 To 100, Deduct	*-12.34*	
		For >100 To 250, Deduct	*-22.87*	
		For >250 To 500, Deduct	*-42.14*	
		For >500, Deduct	*-61.40*	
26 51 19 00-0184	EA	2' x 4', 4,000 Lumens, Architectural, Lay-In/Troffer LED Fixture (Cree® CR24-40L-35K-S)	401.96	48.43
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*134.96*	
		For Surface Mount, Add	*245.31*	
		For >50 To 100, Deduct	*-11.85*	
		For >100 To 250, Deduct	*-21.90*	
		For >250 To 500, Deduct	*-40.20*	
		For >500, Deduct	*-58.49*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0185	EA	2' x 4', 4,000 Lumens, High Efficiency, Architectural, Lay-In/Troffer LED Fixture (CREE® CR24-40LHE-35/40K-S) Note: CCT 30K to 50K	578.85	48.02
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*134.96*	
		For Surface Mount, Add	*245.31*	
		For >50 To 100, Deduct	*-16.27*	
		For >100 To 250, Deduct	*-30.75*	
		For >250 To 500, Deduct	*-57.89*	
		For >500, Deduct	*-85.02*	
26 51 19 00-0186	EA	2' x 4', 5,000 Lumens, Architectural, Lay-In/Troffer LED Fixture (Cree® CR24-50L-30/50K-S) Note: CCT 30K to 50K	503.46	48.02
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*134.96*	
		For Surface Mount, Add	*245.31*	
		For >50 To 100, Deduct	*-14.39*	
		For >100 To 250, Deduct	*-26.98*	
		For >250 To 500, Deduct	*-50.35*	
		For >500, Deduct	*-73.72*	
26 51 19 00-0187	EA	2' x 4', 5,000 Lumens, Architectural, Lay-In/Troffer LED Fixture (Cree® CR24-50L-35K-S)	473.10	48.43
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*134.96*	
		For Surface Mount, Add	*245.31*	
		For >50 To 100, Deduct	*-13.63*	
		For >100 To 250, Deduct	*-25.46*	
		For >250 To 500, Deduct	*-47.31*	
		For >500, Deduct	*-69.16*	
26 51 19 00-0188	EA	1' x 4', 4,000 Lumens, Architectural, High Efficacy, Lay-In/Troffer LED Fixture (Cree® CR14-40LHE-30K-S)	634.11	48.43
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*131.82*	
		For Surface Mount, Add	*224.89*	
		For >50 To 100, Deduct	*-17.66*	
		For >100 To 250, Deduct	*-33.51*	
		For >250 To 500, Deduct	*-63.41*	
		For >500, Deduct	*-93.31*	
26 51 19 00-0189	EA	1' x 4', 4,000 Lumens, Architectural, High Efficacy, Lay-In/Troffer LED Fixture (Cree® CR14-40LHE-35K-S)	578.85	48.43
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*131.82*	
		For Surface Mount, Add	*224.89*	
		For >50 To 100, Deduct	*-16.27*	
		For >100 To 250, Deduct	*-30.75*	
		For >250 To 500, Deduct	*-57.89*	
		For >500, Deduct	*-85.02*	
26 51 19 00-0190	EA	2' x 4', 4,000 Lumens, Architectural, High Efficiency, Lay-In/Troffer LED Fixture (CREE® CR24-40LHE-30K-S)	607.99	48.43
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*134.96*	
		For Surface Mount, Add	*245.31*	
		For >50 To 100, Deduct	*-17.00*	
		For >100 To 250, Deduct	*-32.20*	
		For >250 To 500, Deduct	*-60.80*	
		For >500, Deduct	*-89.40*	
26 51 19 00-0191	EA	1' x 4', 4,000 Lumens, Architectural, HD, Lay-In/Troffer LED Fixture (Cree® CR14-40L-30K-S-HD)	402.95	48.43
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*131.82*	
		For Surface Mount, Add	*224.89*	
		For >50 To 100, Deduct	*-11.88*	
		For >100 To 250, Deduct	*-21.95*	
		For >250 To 500, Deduct	*-40.30*	
		For >500, Deduct	*-58.64*	
26 51 19 00-0192	EA	1' x 4', 4,000 Lumens, Architectural, HD, Lay-In/Troffer LED Fixture (Cree® CR14-40L-35K-S-HD)	376.25	48.43
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*131.82*	
		For Surface Mount, Add	*224.89*	
		For >50 To 100, Deduct	*-11.21*	
		For >100 To 250, Deduct	*-20.62*	
		For >250 To 500, Deduct	*-37.63*	
		For >500, Deduct	*-54.63*	
26 51 19 00-0193	EA	2' x 2', 3,200 Lumens, Architectural, HD, Lay-In/Troffer LED Fixture (Cree® CR22-32L-30K-S-HD)	367.51	41.22
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*115.23*	
		For Surface Mount, Add	*211.83*	
		For >50 To 100, Deduct	*-10.73*	
		For >100 To 250, Deduct	*-19.92*	
		For >250 To 500, Deduct	*-36.75*	
		For >500, Deduct	*-53.58*	
26 51 19 00-0194	EA	2' x 2', 3,200 Lumens, Architectural, HD, Lay-In/Troffer LED Fixture (Cree® CR22-32L-35K-S-HD)	342.38	41.22
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*115.23*	
		For Surface Mount, Add	*211.83*	
		For >50 To 100, Deduct	*-10.11*	
		For >100 To 250, Deduct	*-18.66*	
		For >250 To 500, Deduct	*-34.24*	
		For >500, Deduct	*-49.81*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0195	EA	2' x 4', 4,000 Lumens, Architectural, HD, Lay-In/Troffer LED Fixture (Cree® CR24-40L-30K-S-HD)	402.95	48.43
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*134.96*	
		For Surface Mount, Add	*245.31*	
		For >50 To 100, Deduct	*-11.88*	
		For >100 To 250, Deduct	*-21.95*	
		For >250 To 500, Deduct	*-40.30*	
		For >500, Deduct	*-58.64*	
26 51 19 00-0196	EA	2' x 4', 4,000 Lumens, Architectural, HD, Lay-In/Troffer LED Fixture (Cree® CR24-40L-35K-S-HD)	376.25	48.43
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*134.96*	
		For Surface Mount, Add	*245.31*	
		For >50 To 100, Deduct	*-11.21*	
		For >100 To 250, Deduct	*-20.62*	
		For >250 To 500, Deduct	*-37.63*	
		For >500, Deduct	*-54.63*	
26 51 19 00-0197	EA	1' x 4', 4,000 Lumens, Adjustable CCT, Smartcast Technology, Architectural, Lay-In/Troffer LED Fixture (Cree® CR14-40L-ACK-CMA)	495.27	48.43
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*131.82*	
		For Surface Mount, Add	*224.89*	
		For >50 To 100, Deduct	*-14.19*	
		For >100 To 250, Deduct	*-26.57*	
		For >250 To 500, Deduct	*-49.53*	
		For >500, Deduct	*-72.49*	
26 51 19 00-0198	EA	1' x 4', 4,000 Lumens, High Efficacy, Smartcast Technology, Architectural, Lay-In/Troffer LED Fixture (Cree® CR14-40LHE-30K-CMA)	579.44	48.43
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*131.82*	
		For Surface Mount, Add	*224.89*	
		For >50 To 100, Deduct	*-16.29*	
		For >100 To 250, Deduct	*-30.78*	
		For >250 To 500, Deduct	*-57.94*	
		For >500, Deduct	*-85.11*	
26 51 19 00-0199	EA	2' x 2', 3,200 Lumens, Adjustable CCT, Smartcast Technology, Architectural, Lay-In/Troffer LED Fixture (Cree® CR22-32L-ACK-CMA)	435.08	41.22
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*115.23*	
		For Surface Mount, Add	*211.83*	
		For >50 To 100, Deduct	*-12.42*	
		For >100 To 250, Deduct	*-23.30*	
		For >250 To 500, Deduct	*-43.51*	
		For >500, Deduct	*-63.72*	
26 51 19 00-0200	EA	2' x 4', 4,000 Lumens, Adjustable CCT, Smartcast Technology, Architectural, Lay-In/Troffer LED Fixture (Cree® CR24-40L-ACK-CMA)	495.27	48.43
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*134.96*	
		For Surface Mount, Add	*245.31*	
		For >50 To 100, Deduct	*-14.19*	
		For >100 To 250, Deduct	*-26.57*	
		For >250 To 500, Deduct	*-49.53*	
		For >500, Deduct	*-72.49*	
26 51 19 00-0201	EA	2' x 4', 4,000 Lumens, High Efficacy, Smartcast Technology, Architectural, Lay-In/Troffer LED Fixture (Cree® CR24-40LHE-30K-CMA)	579.44	48.43
		For Expanded Size Junction Box For Through Wiring, Add	*4.40*	
		For Drywall Or Plaster Ceilings, Add	*134.96*	
		For Surface Mount, Add	*245.31*	
		For >50 To 100, Deduct	*-16.29*	
		For >100 To 250, Deduct	*-30.78*	
		For >250 To 500, Deduct	*-57.94*	
		For >500, Deduct	*-85.11*	
26 51 19 00-0202		Architectural, Lay-In/Troffer LED Fixtures (CREE® ZR Series) *(26 51 19 00-0163)*		
		Note: Includes 3,500 or 4,000K color temperature, 120/277 voltage and 22 gauge steel housing assembly. Excludes sensors.		
26 51 19 00-0203	EA	1' x 4', 4,000 Lumens, Architectural, Lay-In/Troffer LED Fixture (Cree® ZR14-40L-35K-10V)	273.55	48.43
		For Drywall Or Plaster Ceilings, Add	*131.82*	
		For >50 To 100, Deduct	*-8.64*	
		For >100 To 250, Deduct	*-15.48*	
		For >250 To 500, Deduct	*-27.36*	
		For >500, Deduct	*-39.23*	
		For Surface Mount, Add	*171.49*	
26 51 19 00-0204	EA	2' x 2', 3,200 Lumens, Architectural, Lay-In/Troffer LED Fixture (Cree® ZR22-40L-35K-10V)	244.76	41.22
		For Drywall Or Plaster Ceilings, Add	*115.23*	
		For >50 To 100, Deduct	*-7.66*	
		For >100 To 250, Deduct	*-13.78*	
		For >250 To 500, Deduct	*-24.48*	
		For >500, Deduct	*-35.17*	
		For Surface Mount, Add	*160.19*	
26 51 19 00-0205	EA	2' x 2', 3,200 Lumens, Architectural, Lay-In/Troffer LED Fixture (Cree® ZR22-32LHE-35K-10V)	799.08	41.22
		For Drywall Or Plaster Ceilings, Add	*115.23*	
		For >50 To 100, Deduct	*-21.52*	
		For >100 To 250, Deduct	*-41.50*	
		For >250 To 500, Deduct	*-79.91*	
		For >500, Deduct	*-118.32*	
		For Surface Mount, Add	*160.19*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0206	EA	2' x 4', 4,000 Lumens, Architectural, Lay-In/Troffer LED Fixture (Cree® ZR24-40L-35K-10V)	282.79	48.43
		For Drywall Or Plaster Ceilings, Add	*134.96*	
		For >50 To 100, Deduct	*-8.87*	
		For >100 To 250, Deduct	*-15.94*	
		For >250 To 500, Deduct	*-28.28*	
		For >500, Deduct	*-40.62*	
		For Surface Mount, Add	*189.96*	
26 51 19 00-0207	EA	2' x 4', 4,000 Lumens, Architectural, Lay-In/Troffer LED Fixture (Cree® ZR24-32LHE-35K-10V)	994.17	48.43
		For Drywall Or Plaster Ceilings, Add	*134.96*	
		For >50 To 100, Deduct	*-26.66*	
		For >100 To 250, Deduct	*-51.51*	
		For >250 To 500, Deduct	*-99.42*	
		For >500, Deduct	*-147.32*	
		For Surface Mount, Add	*189.96*	
26 51 19 00-0208	EA	2' x 4', 5,000 Lumens, Architectural, Lay-In/Troffer LED Fixture (Cree® ZR24-50L-40K-10V-FD)	303.11	48.43
		For Drywall Or Plaster Ceilings, Add	*134.96*	
		For >50 To 100, Deduct	*-9.38*	
		For >100 To 250, Deduct	*-16.96*	
		For >250 To 500, Deduct	*-30.31*	
		For >500, Deduct	*-43.66*	
		For Surface Mount, Add	*189.96*	
26 51 19 00-0209	EA	1' x 4', 4,000 Lumens, Smartcast Technology, Architectural, Lay-In/Troffer LED Fixture (Cree® ZR14-40L-35K-CMA)	347.45	48.43
		For Drywall Or Plaster Ceilings, Add	*131.82*	
		For >50 To 100, Deduct	*-10.49*	
		For >100 To 250, Deduct	*-19.18*	
		For >250 To 500, Deduct	*-34.75*	
		For >500, Deduct	*-50.31*	
		For Surface Mount, Add	*171.49*	
26 51 19 00-0210	EA	2' x 2', 4,000 Lumens, Smartcast Technology, Architectural, Lay-In/Troffer LED Fixture (Cree® ZR22-32L-35K-CMA)	318.67	41.22
		For Drywall Or Plaster Ceilings, Add	*115.23*	
		For >50 To 100, Deduct	*-9.51*	
		For >100 To 250, Deduct	*-17.48*	
		For >250 To 500, Deduct	*-31.87*	
		For >500, Deduct	*-46.25*	
		For Surface Mount, Add	*160.19*	
26 51 19 00-0211	EA	2' x 4', 4,000 Lumens, Smartcast Technology, Architectural, Lay-In/Troffer LED Fixture (Cree® ZR24-40L-35K-CMA)	356.70	48.43
		For Drywall Or Plaster Ceilings, Add	*134.96*	
		For >50 To 100, Deduct	*-10.72*	
		For >100 To 250, Deduct	*-19.64*	
		For >250 To 500, Deduct	*-35.67*	
		For >500, Deduct	*-51.70*	
		For Surface Mount, Add	*189.96*	

26 51 19 00-0212 Architectural, Lay-In/Troffer LED Fixtures (Lithonia) *(26 51 19 00-0163)*

Note: Includes 4,000K color temperature, 120/277 voltage and steel housing assembly. Excludes sensors.

26 51 19 00-0213	EA	2,100 Lumens, 1' x 4', Architectural, Lay-In/Troffer LED Fixture (Lithonia ALL4)	415.29	48.02
		For Drywall Or Plaster Ceilings With Frame Kit, Add	*38.80*	
		For >50 To 100, Deduct	*-12.19*	
		For >100 To 250, Deduct	*-22.57*	
		For >250 To 500, Deduct	*-41.53*	
		For >500, Deduct	*-60.49*	
26 51 19 00-0214	EA	4,300 Lumens, 1' x 4', Architectural, Lay-In/Troffer LED Fixture (Lithonia ALL4)	489.02	48.02
		For Drywall Or Plaster Ceilings With Frame Kit, Add	*42.49*	
		For >50 To 100, Deduct	*-14.03*	
		For >100 To 250, Deduct	*-26.25*	
		For >250 To 500, Deduct	*-48.90*	
		For >500, Deduct	*-71.55*	
26 51 19 00-0215	EA	6,400 Lumens, 1' x 4', Architectural, Lay-In/Troffer LED Fixture (Lithonia ALL4)	555.38	48.02
		For Drywall Or Plaster Ceilings With Frame Kit, Add	*45.80*	
		For >50 To 100, Deduct	*-15.69*	
		For >100 To 250, Deduct	*-29.57*	
		For >250 To 500, Deduct	*-55.54*	
		For >500, Deduct	*-81.50*	

26 51 19 00-0216 Architectural, Lay-In/Troffer LED Fixtures (Metalux®) *(26 51 19 00-0163)*

Note: Includes 3,000K, 3,500 or 4,000K color temperature, 120/277 voltage and code gauge steel housing assembly. Excludes sensors.

26 51 19 00-0217	EA	2' x 2', 2,500 Lumens, Architectural, Lay-In/Troffer LED Fixture (Metalux® Accord™ 2AC)	298.05	41.22
		For >50 To 100, Deduct	*-9.00*	
		For >100 To 250, Deduct	*-16.45*	
		For >250 To 500, Deduct	*-29.81*	
		For >500, Deduct	*-43.16*	
26 51 19 00-0218	EA	2' x 4', 4,700 Lumens, Architectural, Lay-In/Troffer LED Fixture (Metalux® Accord™ 2AC)	397.49	48.02
		For >50 To 100, Deduct	*-11.74*	
		For >100 To 250, Deduct	*-21.68*	
		For >250 To 500, Deduct	*-39.75*	
		For >500, Deduct	*-57.82*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0219		**Architectural, Lay-In/Troffer LED Fixtures (Orion)** *(26 51 19 00-0163)* Note: Includes 3,000K, 3,500 or 4,000K color temperature, 120/277 voltage and code gauge steel housing assembly. Excludes sensors.		
26 51 19 00-0220	EA	2' x 2', 3,500 Lumens, Architectural, Lay-In/Troffer LED Fixture (Orion OLRL-035L-L-UNV-FDX-840-22-1P-CT-M-LF)	334.59	41.22
		For >50 To 100, Deduct	*-9.91*	
		For >100 To 250, Deduct	*-18.28*	
		For >250 To 500, Deduct	*-33.46*	
		For >500, Deduct	*-48.64*	
26 51 19 00-0221	EA	2' x 2', 4,100 Lumens, Architectural, Lay-In/Troffer LED Fixture (Orion OLRL-041L-L-UNV-FDX-840-22-1P-CT-M-LF)	347.10	41.22
		For >50 To 100, Deduct	*-10.22*	
		For >100 To 250, Deduct	*-18.90*	
		For >250 To 500, Deduct	*-34.71*	
		For >500, Deduct	*-50.52*	
26 51 19 00-0222	EA	2' x 4', 3,500 Lumens, Architectural, Lay-In/Troffer LED Fixture (Orion OLRL-035L-L-UNV-FDX-840-24-1P-CT-M-LF)	361.16	48.43
		For >50 To 100, Deduct	*-10.83*	
		For >100 To 250, Deduct	*-19.86*	
		For >250 To 500, Deduct	*-36.12*	
		For >500, Deduct	*-52.37*	
26 51 19 00-0223	EA	2' x 4', 4,100 Lumens, Architectural, Lay-In/Troffer LED Fixture (Orion OLRL-041L-L-UNV-FDX-840-24-1P-CT-M-LF)	373.67	48.43
		For >50 To 100, Deduct	*-11.15*	
		For >100 To 250, Deduct	*-20.49*	
		For >250 To 500, Deduct	*-37.37*	
		For >500, Deduct	*-54.25*	
26 51 19 00-0224		**Architectural, Lay-In/Troffer LED Fixtures (Everlast)** *(26 51 19 00-0163)* Note: Includes 3,000K, 3,500 or 4,000K color temperature, 120/277 voltage and code gauge steel housing assembly. Excludes sensors.		
26 51 19 00-0225	EA	2' x 2', 4,200 Lumens, Architectural, Lay-In/Troffer LED Fixture (Everlast EL-LED-MQ)	449.82	41.22
		For >50 To 100, Deduct	*-12.79*	
		For >100 To 250, Deduct	*-24.04*	
		For >250 To 500, Deduct	*-44.98*	
		For >500, Deduct	*-65.93*	
26 51 19 00-0226	EA	2' x 4', 10,000 Lumens, Architectural, Lay-In/Troffer LED Fixture (Everlast EL-LED-MQ)	756.16	48.43
		For >50 To 100, Deduct	*-20.71*	
		For >100 To 250, Deduct	*-39.61*	
		For >250 To 500, Deduct	*-75.62*	
		For >500, Deduct	*-111.62*	
26 51 19 00-0227		**Architectural, Lay-In/Troffer LED Fixtures (Finelite)** *(26 51 19 00-0163)* Note: Includes 3,000K color temperature, 120/277 voltage and 20 gauge steel housing assembly. Excludes sensors.		
26 51 19 00-0228	EA	2' x 2', 4,301 Lumens, Architectural, Lay-In/Troffer LED Fixture (Finelite HPR LED A 2x2)	410.06	41.22
		For >50 To 100, Deduct	*-11.80*	
		For >100 To 250, Deduct	*-22.05*	
		For >250 To 500, Deduct	*-41.01*	
		For >500, Deduct	*-59.96*	
26 51 19 00-0229	EA	2' x 4', 4,671 Lumens, Architectural, Lay-In/Troffer LED Fixture (Finelite HPR LED A 2x2)	557.99	48.43
		For >50 To 100, Deduct	*-15.75*	
		For >100 To 250, Deduct	*-29.70*	
		For >250 To 500, Deduct	*-55.80*	
		For >500, Deduct	*-81.90*	
26 51 19 00-0230		**Shadow Box Style, Lay-In/Troffer LED Fixtures** *(26 51 19 00-0131)*		
26 51 19 00-0231		**Shadow Box Style, Lay-In/Troffer LED Fixtures (Lithonia SBSL)** *(26 51 19 00-0230)*		
26 51 19 00-0232	EA	2' x 2', 3,300 Lumens, Shadow Box Style, Lay-In/Troffer LED Fixture (Lithonia 2SBSL2)	657.82	41.22
		For Drywall Or Plaster Ceilings, Add	*27.82*	
		For >50 To 100, Deduct	*-17.99*	
		For >100 To 250, Deduct	*-34.44*	
		For >250 To 500, Deduct	*-65.78*	
		For >500, Deduct	*-97.13*	
26 51 19 00-0233	EA	2' x 4', 4,600 Lumens, Shadow Box Style, Lay-In/Troffer LED Fixture (Lithonia 2SBSL4)	899.65	48.02
		For Drywall Or Plaster Ceilings With Frame Kit, Add	*63.02*	
		For >50 To 100, Deduct	*-24.29*	
		For >100 To 250, Deduct	*-46.79*	
		For >250 To 500, Deduct	*-89.97*	
		For >500, Deduct	*-133.14*	
26 51 19 00-0234		**Panel Type, Lay-In/Troffer LED Fixtures** *(26 51 19 00-0131)*		
26 51 19 00-0235		**Panel Type, Lay-In/Troffer LED Fixtures (CREE® FP Series)** *(26 51 19 00-0234)*		
26 51 19 00-0236	EA	4,000 Lumens, 1' x 4', Panel Type, Lay-In/Troffer LED Fixture (Cree® FP14-40L-35K-10V)	298.30	48.43
		For >50 To 100, Deduct	*-9.26*	
		For >100 To 250, Deduct	*-16.72*	
		For >250 To 500, Deduct	*-29.83*	
		For >500, Deduct	*-42.94*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0237	EA	4,000 Lumens, 1' x 4', Panel Type, Lay-In/Troffer LED Fixture, 1,400 Lumens Emergency Backup (Cree® FP14-40L-35K-10V-EB14)	763.20	48.43
		For >50 To 100, Deduct	*-20.88*	
		For >100 To 250, Deduct	*-39.96*	
		For >250 To 500, Deduct	*-76.32*	
		For >500, Deduct	*-112.68*	
26 51 19 00-0238	EA	3,400 Lumens, 2' x 2', Panel Type, Lay-In/Troffer LED Fixture (Cree® FP22-34L-35K-10V)	226.74	41.22
		For >50 To 100, Deduct	*-7.21*	
		For >100 To 250, Deduct	*-12.88*	
		For >250 To 500, Deduct	*-22.67*	
		For >500, Deduct	*-32.47*	
26 51 19 00-0239	EA	5,000 Lumens, 2' x 2', Panel Type, Lay-In/Troffer LED Fixture (Cree® FP22-50L-35K-10V)	261.29	41.22
		For >50 To 100, Deduct	*-8.08*	
		For >100 To 250, Deduct	*-14.61*	
		For >250 To 500, Deduct	*-26.13*	
		For >500, Deduct	*-37.65*	
26 51 19 00-0240	EA	3,400 Lumens, 2' x 2', Panel Type, Lay-In/Troffer LED Fixture, 1,400 Lumens Emergency Backup (Cree® FP22-34L-35K-10V-EB14)	698.52	48.43
		For >50 To 100, Deduct	*-19.27*	
		For >100 To 250, Deduct	*-36.73*	
		For >250 To 500, Deduct	*-69.85*	
		For >500, Deduct	*-102.97*	
26 51 19 00-0241	EA	5,000 Lumens, 2' x 2', Panel Type, Lay-In/Troffer LED Fixture, 1,400 Lumens Emergency Backup (Cree® FP22-50L-35K-10V-EB14)	735.48	48.43
		For >50 To 100, Deduct	*-20.19*	
		For >100 To 250, Deduct	*-38.58*	
		For >250 To 500, Deduct	*-73.55*	
		For >500, Deduct	*-108.52*	
26 51 19 00-0242	EA	4,000 Lumens, 2' x 4', Panel Type, Lay-In/Troffer LED Fixture (Cree® FP24-40L-35K-10V)	315.58	48.43
		For >50 To 100, Deduct	*-9.69*	
		For >100 To 250, Deduct	*-17.58*	
		For >250 To 500, Deduct	*-31.56*	
		For >500, Deduct	*-45.53*	
26 51 19 00-0243	EA	5,000 Lumens, 2' x 4', Panel Type, Lay-In/Troffer LED Fixture (Cree® FP24-50L-35K-10V)	343.85	48.43
		For >50 To 100, Deduct	*-10.40*	
		For >100 To 250, Deduct	*-19.00*	
		For >250 To 500, Deduct	*-34.39*	
		For >500, Deduct	*-49.77*	
26 51 19 00-0244	EA	4,000 Lumens, 2' x 4', Panel Type, Lay-In/Troffer LED Fixture, 1,400 Lumens Emergency Backup (Cree® FP24-40L-35K-10V-EB14)	781.67	48.43
		For >50 To 100, Deduct	*-21.35*	
		For >100 To 250, Deduct	*-40.89*	
		For >250 To 500, Deduct	*-78.17*	
		For >500, Deduct	*-115.45*	
26 51 19 00-0245	EA	5,000 Lumens, 2' x 4', Panel Type, Lay-In/Troffer LED Fixture, 1,400 Lumens Emergency Backup (Cree® FP24-50L-35K-10V-EB14)	811.24	48.43
		For >50 To 100, Deduct	*-22.08*	
		For >100 To 250, Deduct	*-42.37*	
		For >250 To 500, Deduct	*-81.12*	
		For >500, Deduct	*-119.88*	

26 51 19 00-0246 Panel Type, Lay-In/Troffer LED Fixtures (Lithonia) *(26 51 19 00-0234)*

26 51 19 00-0247	EA	2' x 4', 4000/5000/6000 Lumens, 3500K CCT, LED Switchable Flat Panel Troffer (Lithonia Lighting CPANL 2X4 40/50/60LM 35K M2)	271.22	48.02
		For >50 To 100, Deduct	*-8.58*	
		For >100 To 250, Deduct	*-15.36*	
		For >250 To 500, Deduct	*-27.12*	
		For >500, Deduct	*-38.88*	
26 51 19 00-0248	EA	2' x 4', 4000/5000/6000 Lumens, 4000K CCT, LED Switchable Flat Panel Troffer (Lithonia Lighting CPANL 2X4 40/50/60LM 40K M2)	271.22	48.02
		For >50 To 100, Deduct	*-8.58*	
		For >100 To 250, Deduct	*-15.36*	
		For >250 To 500, Deduct	*-27.12*	
		For >500, Deduct	*-38.88*	
26 51 19 00-0249	EA	2' x 2', 2400/3300/4000/Lumens, 3500K CCT, LED Switchable Flat Panel Troffer (Lithonia Lighting CPANL 2X2 24/33/44LM 35K M4)	216.85	48.02
		For >50 To 100, Deduct	*-7.22*	
		For >100 To 250, Deduct	*-12.65*	
		For >250 To 500, Deduct	*-21.69*	
		For >500, Deduct	*-30.72*	
26 51 19 00-0250	EA	2' x 2', 2400/3300/4000/Lumens, 4000K CCT, LED Switchable Flat Panel Troffer (Lithonia Lighting CPANL 2X2 24/33/44LM 40K M4)	216.85	48.02
		For >50 To 100, Deduct	*-7.22*	
		For >100 To 250, Deduct	*-12.65*	
		For >250 To 500, Deduct	*-21.69*	
		For >500, Deduct	*-30.72*	
26 51 19 00-0251	EA	1' x 4', 2400/3300/4000/Lumens, 3500K CCT, LED Switchable Flat Panel Troffer (Lithonia Lighting CPANL 1X4 24/33/44LM 35K M4)	240.68	48.02
		For >50 To 100, Deduct	*-7.82*	
		For >100 To 250, Deduct	*-13.84*	
		For >250 To 500, Deduct	*-24.07*	
		For >500, Deduct	*-34.30*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0252	EA	1' x 4', 2400/3300/4000/Lumens, 4000K CCT, LED Switchable Flat Panel Troffer (Lithonia Lighting CPANL 1X4 24/33/44LM 40K M4)	240.68	48.02
		For >50 To 100, Deduct	*-7.82*	
		For >100 To 250, Deduct	*-13.84*	
		For >250 To 500, Deduct	*-24.07*	
		For >500, Deduct	*-34.30*	

26 51 19 00-0253 Panel Type, Lay-In/Troffer LED Fixtures (PlanLED Galaxy) *(26 51 19 00-0234)*

26 51 19 00-0254	EA	1' x 4', 3,100 Lumens, Panel Type, Lay-In/Troffer LED Fixture (PlanLED Galaxy GL140-34)	443.90	48.02
		For >50 To 100, Deduct	*-12.90*	
		For >100 To 250, Deduct	*-24.00*	
		For >250 To 500, Deduct	*-44.39*	
		For >500, Deduct	*-64.78*	
26 51 19 00-0255	EA	2' x 2', 3,100 Lumens, Panel Type, Lay-In/Troffer LED Fixture (PlanLED Galaxy GL220-34)	461.71	48.02
		For >50 To 100, Deduct	*-13.35*	
		For >100 To 250, Deduct	*-24.89*	
		For >250 To 500, Deduct	*-46.17*	
		For >500, Deduct	*-67.45*	
26 51 19 00-0256	EA	2' x 4', 4,000 Lumens, Panel Type, Lay-In/Troffer LED Fixture (PlanLED Galaxy GL240-40)	579.69	48.02
		For >50 To 100, Deduct	*-16.30*	
		For >100 To 250, Deduct	*-30.79*	
		For >250 To 500, Deduct	*-57.97*	
		For >500, Deduct	*-85.15*	
26 51 19 00-0257	EA	2' x 4', 5,000 Lumens, Panel Type, Lay-In/Troffer LED Fixture (PlanLED Galaxy GL240-52)	579.69	48.02
		For >50 To 100, Deduct	*-16.30*	
		For >100 To 250, Deduct	*-30.79*	
		For >250 To 500, Deduct	*-57.97*	
		For >500, Deduct	*-85.15*	

26 51 19 00-0258 Panel Type, Lay-In/Troffer LED Fixtures (Sylvania) *(26 51 19 00-0234)*

26 51 19 00-0259	EA	1' x 4', 3,300 Lumens, 32 Watt, LED Edge Lite Panel (Sylvania PANELF1A/032UNVD840/14G/WH)	228.61	48.02
		For Surface Mounting Kit (Sylvania SMKIT1A/14A/WH), Add	*58.45*	
		For >50 To 100, Deduct	*-7.52*	
		For >100 To 250, Deduct	*-13.23*	
		For >250 To 500, Deduct	*-22.86*	
		For >500, Deduct	*-32.49*	
26 51 19 00-0260	EA	2' x 2', 3,500 Lumens, 32 Watt, LED Edge Lite Panel (Sylvania PANELF1A/032UNVD840/22G/WH)	236.23	48.02
		For >50 To 100, Deduct	*-7.71*	
		For >100 To 250, Deduct	*-13.62*	
		For >250 To 500, Deduct	*-23.62*	
		For >500, Deduct	*-33.63*	
26 51 19 00-0261	EA	2' x 4', 3,300 Lumens, 32 Watt, LED Edge Lite Panel (Sylvania PANELF1A/032UNVD840/24G/WH)	239.72	48.02
		For Surface Mounting Kit (Sylvania SMKIT1A/24A/WH)	*73.06*	
		For >50 To 100, Deduct	*-7.80*	
		For >100 To 250, Deduct	*-13.79*	
		For >250 To 500, Deduct	*-23.97*	
		For >500, Deduct	*-34.15*	
26 51 19 00-0262	EA	2' x 4', 3,300 Lumens, 32 Watt, 3500K CCT, LED Edge Lite Panel With Kit (Sylvania PANELF1A/032UNVD835/24G/WH_SMKIT1A/24A/WH)	569.00	48.02
		For >50 To 100, Deduct	*-16.03*	
		For >100 To 250, Deduct	*-30.25*	
		For >250 To 500, Deduct	*-56.90*	
		For >500, Deduct	*-83.55*	

26 51 19 00-0263 Lay-In/Troffer LED Fixtures (LG LGE Series) *(26 51 19 00-0131)*

26 51 19 00-0264	EA	26 Watt, 3500K CCT, 2' x 4', T-Bar Lay-In Troffer LED Fixture (LG LGE-2X4RT-26-35-3400-TB)	292.38	48.02
		For >50 To 100, Deduct	*-9.11*	
		For >100 To 250, Deduct	*-16.42*	
		For >250 To 500, Deduct	*-29.24*	
		For >500, Deduct	*-42.05*	
26 51 19 00-0265	EA	26 Watt, 4000K CCT, 2' x 4', T-Bar Lay-In Troffer LED Fixture (LG LGE-2X4RT-26-40-3400-TB)	292.38	48.02
		For >50 To 100, Deduct	*-9.11*	
		For >100 To 250, Deduct	*-16.42*	
		For >250 To 500, Deduct	*-29.24*	
		For >500, Deduct	*-42.05*	
26 51 19 00-0266	EA	34 Watt, 3500K CCT, 2' x 4', T-Bar Lay-In Troffer LED Fixture (LG LGE-2X4RT-34-35-4400-TB)	321.96	48.02
		For >50 To 100, Deduct	*-9.85*	
		For >100 To 250, Deduct	*-17.90*	
		For >250 To 500, Deduct	*-32.20*	
		For >500, Deduct	*-46.49*	
26 51 19 00-0267	EA	34 Watt, 4000K CCT, 2' x 4', T-Bar Lay-In Troffer LED Fixture (LG LGE-2X4RT-34-40-4500-TB)	321.96	48.02
		For >50 To 100, Deduct	*-9.85*	
		For >100 To 250, Deduct	*-17.90*	
		For >250 To 500, Deduct	*-32.20*	
		For >500, Deduct	*-46.49*	
26 51 19 00-0268	EA	48 Watt, 3500K CCT, 2' x 4', T-Bar Lay-In Troffer LED Fixture (LG LGE-2X4RT-48-35-5800-TB)	337.26	48.02
		For >50 To 100, Deduct	*-10.24*	
		For >100 To 250, Deduct	*-18.67*	
		For >250 To 500, Deduct	*-33.73*	
		For >500, Deduct	*-48.79*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0269	EA	48 Watt, 4000K CCT, 2' x 4', T-Bar Lay-In Troffer LED Fixture (LG LGE-2X4RT-48-40-6000-TB)	337.26	48.02
		For >50 To 100, Deduct	*-10.24*	
		For >100 To 250, Deduct	*-18.67*	
		For >250 To 500, Deduct	*-33.73*	
		For >500, Deduct	*-48.79*	
26 51 19 00-0270	EA	18 Watt, 3500K CCT, 2' x 2', T-Bar Lay-In Troffer LED Fixture (LG LGE-2X2RT-18-35-2350-TB)	276.07	48.02
		For >50 To 100, Deduct	*-8.71*	
		For >100 To 250, Deduct	*-15.61*	
		For >250 To 500, Deduct	*-27.61*	
		For >500, Deduct	*-39.61*	
26 51 19 00-0271	EA	18 Watt, 4000K CCT, 2' x 2', T-Bar Lay-In Troffer LED Fixture (LG LGE-2X2RT-18-40-2400-TB)	276.07	48.02
		For >50 To 100, Deduct	*-8.71*	
		For >100 To 250, Deduct	*-15.61*	
		For >250 To 500, Deduct	*-27.61*	
		For >500, Deduct	*-39.61*	
26 51 19 00-0272	EA	32 Watt, 3500K CCT, 2' x 2', T-Bar Lay-In Troffer LED Fixture (LG LGE-2X2RT-32-35-3400-TB)	296.47	48.02
		For >50 To 100, Deduct	*-9.22*	
		For >100 To 250, Deduct	*-16.63*	
		For >250 To 500, Deduct	*-29.65*	
		For >500, Deduct	*-42.67*	
26 51 19 00-0273	EA	32 Watt, 4000K CCT, 2' x 2', T-Bar Lay-In Troffer LED Fixture (LG LGE-2X2RT-32-40-3400-TB)	296.47	48.02
		For >50 To 100, Deduct	*-9.22*	
		For >100 To 250, Deduct	*-16.63*	
		For >250 To 500, Deduct	*-29.65*	
		For >500, Deduct	*-42.67*	
26 51 19 00-0274	EA	34 Watt, 3500K CCT, 2' x 4', Recessed LED Troffer (LG LGE-2X4RT-34-35-4400-TB)	321.96	48.02
		For >50 To 100, Deduct	*-9.85*	
		For >100 To 250, Deduct	*-17.90*	
		For >250 To 500, Deduct	*-32.20*	
		For >500, Deduct	*-46.49*	
26 51 19 00-0275	EA	34 Watt, 4000K CCT, 2' x 4', Recessed LED Troffer (LG LGE-2X4RT-34-40-4500-TB)	321.96	48.02
		For >50 To 100, Deduct	*-9.85*	
		For >100 To 250, Deduct	*-17.90*	
		For >250 To 500, Deduct	*-32.20*	
		For >500, Deduct	*-46.49*	
26 51 19 00-0276	EA	40 Watt, 3500K CCT, 1' x 4', Simple Choice Troffer LED Fixture (LG LGE-1X4SI-40-35-4000-TB)	194.50	48.02
		For >50 To 100, Deduct	*-6.67*	
		For >100 To 250, Deduct	*-11.53*	
		For >250 To 500, Deduct	*-19.45*	
		For >500, Deduct	*-27.37*	
26 51 19 00-0277	EA	40 Watt, 4000K CCT, 1' x 4', Simple Choice Troffer LED Fixture (LG LGE-1X4SI-40-40-4000-TB)	194.50	48.02
		For >50 To 100, Deduct	*-6.67*	
		For >100 To 250, Deduct	*-11.53*	
		For >250 To 500, Deduct	*-19.45*	
		For >500, Deduct	*-27.37*	
26 51 19 00-0278	EA	31 Watt, 3500K CCT, 2' x 4', Simple Choice Troffer LED Fixture (LG LGE-2X4SI-31-35-4000-TB)	232.22	48.02
		For >50 To 100, Deduct	*-7.61*	
		For >100 To 250, Deduct	*-13.41*	
		For >250 To 500, Deduct	*-23.22*	
		For >500, Deduct	*-33.03*	
26 51 19 00-0279	EA	31 Watt, 4000K CCT, 2' x 4', Simple Choice Troffer LED Fixture (LG LGE-2X4SI-31-40-4000-TB)	232.22	48.02
		For >50 To 100, Deduct	*-7.61*	
		For >100 To 250, Deduct	*-13.41*	
		For >250 To 500, Deduct	*-23.22*	
		For >500, Deduct	*-33.03*	
26 51 19 00-0280	EA	40 Watt, 3500K CCT, 2' x 4', Simple Choice Troffer LED Fixture (LG LGE-2X4SI-40-35-4000-TB)	240.28	48.02
		For >50 To 100, Deduct	*-7.81*	
		For >100 To 250, Deduct	*-13.82*	
		For >250 To 500, Deduct	*-24.03*	
		For >500, Deduct	*-34.24*	
26 51 19 00-0281	EA	40 Watt, 4000K CCT, 2' x 4', Simple Choice Troffer LED Fixture (LG LGE-2X4SI-40-40-4000-TB)	240.38	48.02
		For >50 To 100, Deduct	*-7.81*	
		For >100 To 250, Deduct	*-13.82*	
		For >250 To 500, Deduct	*-24.04*	
		For >500, Deduct	*-34.25*	
26 51 19 00-0282	EA	25 Watt, 3500K CCT, 2' x 2', Simple Choice Troffer LED Fixture (LG LGE-2X2SI-25-35-3200-TB)	197.45	48.02
		For >50 To 100, Deduct	*-6.74*	
		For >100 To 250, Deduct	*-11.68*	
		For >250 To 500, Deduct	*-19.75*	
		For >500, Deduct	*-27.81*	
26 51 19 00-0283	EA	25 Watt, 4000K CCT, 2' x 2', Simple Choice Troffer LED Fixture (LG LGE-2X2SI-25-40-3200-TB)	197.45	48.02
		For >50 To 100, Deduct	*-6.74*	
		For >100 To 250, Deduct	*-11.68*	
		For >250 To 500, Deduct	*-19.75*	
		For >500, Deduct	*-27.81*	
26 51 19 00-0284	EA	32 Watt, 3500K CCT, 2' x 2', Simple Choice Troffer LED Fixture (LG LGE-2X2SI-32-35-3200-TB)	173.08	48.02
		For >50 To 100, Deduct	*-6.13*	
		For >100 To 250, Deduct	*-10.46*	
		For >250 To 500, Deduct	*-17.31*	
		For >500, Deduct	*-24.16*	
26 51 19 00-0285	EA	32 Watt, 4000K CCT, 2' x 2', Simple Choice Troffer LED Fixture (LG LGE-2X2SI-32-40-3200-TB)	173.08	48.02
		For >50 To 100, Deduct	*-6.13*	
		For >100 To 250, Deduct	*-10.46*	
		For >250 To 500, Deduct	*-17.31*	
		For >500, Deduct	*-24.16*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0286	EA	31 Watt, 3500K CCT, 2' x 4', Simple Choice Troffer LED Fixture With Sensor Connect (LG LGE-2X4SC-31-35-4000-TB)	283.21	48.02
		For >50 To 100, Deduct	*-8.88*	
		For >100 To 250, Deduct	*-15.96*	
		For >250 To 500, Deduct	*-28.32*	
		For >500, Deduct	*-40.68*	
26 51 19 00-0287	EA	31 Watt, 4000K CCT, 2' x 4', Simple Choice Troffer LED Fixture With Sensor Connect (LG LGE-2X4SC-31-40-4000-TB)	283.21	48.02
		For >50 To 100, Deduct	*-8.88*	
		For >100 To 250, Deduct	*-15.96*	
		For >250 To 500, Deduct	*-28.32*	
		For >500, Deduct	*-40.68*	
26 51 19 00-0288	EA	25 Watt, 3500K CCT, 2' x 2', Simple Choice Troffer LED Fixture With Sensor Connect (LG LGE-2X2SC-25-35-3200-TB)	255.69	48.02
		For >50 To 100, Deduct	*-8.20*	
		For >100 To 250, Deduct	*-14.59*	
		For >250 To 500, Deduct	*-25.57*	
		For >500, Deduct	*-36.55*	
26 51 19 00-0289	EA	25 Watt, 4000K CCT, 2' x 2', Simple Choice Troffer LED Fixture With Sensor Connect (LG LGE-2X2SC-25-40-3200-TB)	255.69	48.02
		For >50 To 100, Deduct	*-8.20*	
		For >100 To 250, Deduct	*-14.59*	
		For >250 To 500, Deduct	*-25.57*	
		For >500, Deduct	*-36.55*	
26 51 19 00-0290	EA	32 Watt, 3500K CCT, 2' x 2', Simple Choice Troffer LED Fixture With Sensor Connect (LG LGE-2X2SC-32-35-3200-TB)	231.21	48.02
		For >50 To 100, Deduct	*-7.58*	
		For >100 To 250, Deduct	*-13.36*	
		For >250 To 500, Deduct	*-23.12*	
		For >500, Deduct	*-32.88*	
26 51 19 00-0291	EA	32 Watt, 4000K CCT, 2' x 2', Simple Choice Troffer LED Fixture With Sensor Connect (LG LGE-2X2SC-32-40-3200-TB)	231.21	48.02
		For >50 To 100, Deduct	*-7.58*	
		For >100 To 250, Deduct	*-13.36*	
		For >250 To 500, Deduct	*-23.12*	
		For >500, Deduct	*-32.88*	
26 51 19 00-0292	EA	32 Watt, 3,200 Lumens, 3500K CCT, Lay-In 2' x 2' LED Troffer (LG LGE-2X2SI-32-35-3200-TB) Note: No sensor, ZigBee ready driver	141.48	36.07
		For >50 To 100, Deduct	*-5.34*	
		For >100 To 250, Deduct	*-8.88*	
		For >250 To 500, Deduct	*-14.15*	
		For >500, Deduct	*-19.42*	
26 51 19 00-0293	EA	32 Watt, 3,200 Lumens, 4000K CCT, Lay-In 2' x 2' LED Troffer (LG LGE-2X2SI-32-40-3200-TB) Note: No sensor, ZigBee ready driver	141.48	36.07
		For >50 To 100, Deduct	*-5.34*	
		For >100 To 250, Deduct	*-8.88*	
		For >250 To 500, Deduct	*-14.15*	
		For >500, Deduct	*-19.42*	
26 51 19 00-0294	EA	25 Watt, 3,200 Lumens, 3500K CCT, Lay-In 2' x 2' LED Troffer (LG LGE-2X2SI-25-35-3200-TB) Note: No sensor, ZigBee ready driver	155.76	36.07
		For >50 To 100, Deduct	*-5.70*	
		For >100 To 250, Deduct	*-9.59*	
		For >250 To 500, Deduct	*-15.58*	
		For >500, Deduct	*-21.56*	
26 51 19 00-0295	EA	25 Watt, 3,200 Lumens, 4000K CCT, Lay-In 2' x 2' LED Troffer (LG LGE-2X2SI-25-40-3200-TB) Note: No sensor, ZigBee ready driver	155.76	36.07
		For >50 To 100, Deduct	*-5.70*	
		For >100 To 250, Deduct	*-9.59*	
		For >250 To 500, Deduct	*-15.58*	
		For >500, Deduct	*-21.56*	
26 51 19 00-0296	EA	40 Watt, 4,000 Lumens, 3500K CCT, Lay-In 2' x 4' LED Troffer (LG LGE-2X4SI-40-35-4000-TB) Note: No sensor, ZigBee ready driver	159.83	36.07
		For >50 To 100, Deduct	*-5.80*	
		For >100 To 250, Deduct	*-9.80*	
		For >250 To 500, Deduct	*-15.98*	
		For >500, Deduct	*-22.17*	
26 51 19 00-0297	EA	40 Watt, 4,000 Lumens, 4000K CCT, Lay-In 2' x 4' LED Troffer (LG LGE-2X4SI-40-40-4000-TB) Note: No sensor, ZigBee ready driver	159.83	36.07
		For >50 To 100, Deduct	*-5.80*	
		For >100 To 250, Deduct	*-9.80*	
		For >250 To 500, Deduct	*-15.98*	
		For >500, Deduct	*-22.17*	
26 51 19 00-0298	EA	31 Watt, 4,000 Lumens, 3500K CCT, Lay-In 2' x 4' LED Troffer (LG LGE-2X4SI-31-35-4000-TB) Note: No sensor, ZigBee ready driver	175.13	36.07
		For >50 To 100, Deduct	*-6.18*	
		For >100 To 250, Deduct	*-10.56*	
		For >250 To 500, Deduct	*-17.51*	
		For >500, Deduct	*-24.47*	
26 51 19 00-0299	EA	31 Watt, 4,000 Lumens, 4000K CCT, Lay-In 2' x 4' LED Troffer (LG LGE-2X4SI-31-40-4000-TB) Note: No sensor, ZigBee ready driver	175.13	36.07
		For >50 To 100, Deduct	*-6.18*	
		For >100 To 250, Deduct	*-10.56*	
		For >250 To 500, Deduct	*-17.51*	
		For >500, Deduct	*-24.47*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0300	EA	40 Watt, 4,000 Lumens, 3500K CCT, Lay-In 1' x 4' LED Troffer (LG LGE-1X4SI-40-35-4000-TB)	153.72	36.07
		Note: Factory installed sensor and ZigBee dongle		
		For >50 To 100, Deduct	*-5.65*	
		For >100 To 250, Deduct	*-9.49*	
		For >250 To 500, Deduct	*-15.37*	
		For >500, Deduct	*-21.25*	
26 51 19 00-0301	EA	40 Watt, 4,000 Lumens, 4000K CCT, Lay-In 1' x 4' LED Troffer (LG LGE-1X4SI-40-40-4000-TB)	153.72	36.07
		Note: Factory installed sensor and ZigBee dongle		
		For >50 To 100, Deduct	*-5.65*	
		For >100 To 250, Deduct	*-9.49*	
		For >250 To 500, Deduct	*-15.37*	
		For >500, Deduct	*-21.25*	
26 51 19 00-0302	EA	32 Watt, 3,200 Lumens, 3500K CCT, Lay-In 2' x 2' LED Troffer With Sensor Connect (LG LGE-2X2SC-32-35-3200-TB)	190.54	41.22
		Note: Factory installed sensor and ZigBee dongle		
		For >50 To 100, Deduct	*-6.82*	
		For >100 To 250, Deduct	*-11.59*	
		For >250 To 500, Deduct	*-19.05*	
		For >500, Deduct	*-26.52*	
26 51 19 00-0303	EA	32 Watt, 3,200 Lumens, 4000K CCT, Lay-In 2' x 2' LED Troffer With Sensor Connect (LG LGE-2X2SC-32-40-3200-TB)	190.54	41.22
		Note: Factory installed sensor and ZigBee dongle		
		For >50 To 100, Deduct	*-6.82*	
		For >100 To 250, Deduct	*-11.59*	
		For >250 To 500, Deduct	*-19.05*	
		For >500, Deduct	*-26.52*	
26 51 19 00-0304	EA	25 Watt, 3,200 Lumens, 3500K CCT, Lay-In 2' x 2' LED Troffer With Sensor Connect (LG LGE-2X2SC-25-35-3200-TB)	204.81	41.22
		Note: Factory installed sensor and ZigBee dongle		
		For >50 To 100, Deduct	*-7.18*	
		For >100 To 250, Deduct	*-12.30*	
		For >250 To 500, Deduct	*-20.48*	
		For >500, Deduct	*-28.66*	
26 51 19 00-0305	EA	25 Watt, 3,200 Lumens, 4000K CCT, Lay-In 2' x 2' LED Troffer With Sensor Connect (LG LGE-2X2SC-25-40-3200-TB)	204.81	41.22
		Note: Factory installed sensor and ZigBee dongle		
		For >50 To 100, Deduct	*-7.18*	
		For >100 To 250, Deduct	*-12.30*	
		For >250 To 500, Deduct	*-20.48*	
		For >500, Deduct	*-28.66*	
26 51 19 00-0306	EA	40 Watt, 4,000 Lumens, 3500K CCT, Lay-In 2' x 4' LED Troffer With Sensor Connect (LG LGE-2X4SC-40-35-4000-TB)	209.91	41.22
		Note: Factory installed sensor and ZigBee dongle		
		For >50 To 100, Deduct	*-7.31*	
		For >100 To 250, Deduct	*-12.56*	
		For >250 To 500, Deduct	*-20.99*	
		For >500, Deduct	*-29.43*	
26 51 19 00-0307	EA	40 Watt, 4,000 Lumens, 4000K CCT, Lay-In 2' x 4' LED Troffer With Sensor Connect (LG LGE-2X4SC-40-40-4000-TB)	209.91	41.22
		Note: Factory installed sensor and ZigBee dongle		
		For >50 To 100, Deduct	*-7.31*	
		For >100 To 250, Deduct	*-12.56*	
		For >250 To 500, Deduct	*-20.99*	
		For >500, Deduct	*-29.43*	
26 51 19 00-0308	EA	31 Watt, 4,000 Lumens, 3500K CCT, Lay-In 2' x 4' LED Troffer With Sensor Connect (LG LGE-2X4SC-31-35-4000-TB)	221.13	41.22
		Note: Factory installed sensor and ZigBee dongle		
		For >50 To 100, Deduct	*-7.59*	
		For >100 To 250, Deduct	*-13.12*	
		For >250 To 500, Deduct	*-22.11*	
		For >500, Deduct	*-31.11*	
26 51 19 00-0309	EA	31 Watt, 4,000 Lumens, 4000K CCT, Lay-In 2' x 4' LED Troffer With Sensor Connect (LG LGE-2X4SC-31-40-4000-TB)	221.13	41.22
		Note: Factory installed sensor and ZigBee dongle		
		For >50 To 100, Deduct	*-7.59*	
		For >100 To 250, Deduct	*-13.12*	
		For >250 To 500, Deduct	*-22.11*	
		For >500, Deduct	*-31.11*	
26 51 19 00-0310	EA	40 Watt, 4,000 Lumens, 3500K CCT, Lay-In 1' x 4' LED Troffer With Sensor Connect (LG LGE-1X4SC-40-35-4000-TB)	209.91	41.22
		Note: Factory installed sensor and ZigBee dongle		
		For >50 To 100, Deduct	*-7.31*	
		For >100 To 250, Deduct	*-12.56*	
		For >250 To 500, Deduct	*-20.99*	
		For >500, Deduct	*-29.43*	
26 51 19 00-0311	EA	40 Watt, 4,000 Lumens, 4000K CCT, Lay-In 1' x 4' LED Troffer With Sensor Connect (LG LGE-1X4SC-40-40-4000-TB)	209.91	41.22
		Note: Factory installed sensor and ZigBee dongle		
		For >50 To 100, Deduct	*-7.31*	
		For >100 To 250, Deduct	*-12.56*	
		For >250 To 500, Deduct	*-20.99*	
		For >500, Deduct	*-29.43*	

26 51 19 00-0312 Surface Mount LED Fixtures *(26 51 19 00-0001)*

26 51 19 00-0313 Surface Mount, Volumetric LED Fixtures (Lithonia RTLX) *(26 51 19 00-0312)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0314	EA	1' x 4', 2,000 Lumens, Surface Mount, Volumetric LED Fixture (Lithonia RTLX4)	198.28	48.02
		For >50 To 100, Deduct	*-6.76*	
		For >100 To 250, Deduct	*-11.72*	
		For >250 To 500, Deduct	*-19.83*	
		For >500, Deduct	*-27.94*	
26 51 19 00-0315	EA	1' x 4', 3,000 Lumens, Surface Mount, Volumetric LED Fixture (Lithonia RTLX4)	198.28	48.02
		For >50 To 100, Deduct	*-6.76*	
		For >100 To 250, Deduct	*-11.72*	
		For >250 To 500, Deduct	*-19.83*	
		For >500, Deduct	*-27.94*	
26 51 19 00-0316	EA	1' x 4', 4,000 Lumens, Surface Mount, Volumetric LED Fixture (Lithonia RTLX4)	198.28	48.02
		For >50 To 100, Deduct	*-6.76*	
		For >100 To 250, Deduct	*-11.72*	
		For >250 To 500, Deduct	*-19.83*	
		For >500, Deduct	*-27.94*	
26 51 19 00-0317	EA	1' x 4', 4,800 Lumens, Surface Mount, Volumetric LED Fixture (Lithonia RTLX4)	198.28	48.02
		For >50 To 100, Deduct	*-6.76*	
		For >100 To 250, Deduct	*-11.72*	
		For >250 To 500, Deduct	*-19.83*	
		For >500, Deduct	*-27.94*	

26 51 19 00-0318 Surface Mount, Volumetric LED Fixtures (Lithonia 2RTX) *(26 51 19 00-0312)*

26 51 19 00-0319	EA	2' x 2', 2,000 Lumens, Surface Mount, Volumetric LED Fixture (Lithonia 2RTX2)	240.49	48.02
		For >50 To 100, Deduct	*-7.82*	
		For >100 To 250, Deduct	*-13.83*	
		For >250 To 500, Deduct	*-24.05*	
		For >500, Deduct	*-34.27*	
26 51 19 00-0320	EA	2' x 2', 3,300 Lumens, Surface Mount, Volumetric LED Fixture (Lithonia 2RTX2)	240.49	48.02
		For >50 To 100, Deduct	*-7.82*	
		For >100 To 250, Deduct	*-13.83*	
		For >250 To 500, Deduct	*-24.05*	
		For >500, Deduct	*-34.27*	
26 51 19 00-0321	EA	2' x 2', 4,000 Lumens, Surface Mount, Volumetric LED Fixture (Lithonia 2RTX2)	240.49	48.02
		For >50 To 100, Deduct	*-7.82*	
		For >100 To 250, Deduct	*-13.83*	
		For >250 To 500, Deduct	*-24.05*	
		For >500, Deduct	*-34.27*	
26 51 19 00-0322	EA	2' x 4', 3,000 Lumens, Surface Mount, Volumetric LED Fixture (Lithonia 2RTX4)	289.23	48.02
		For >50 To 100, Deduct	*-9.03*	
		For >100 To 250, Deduct	*-16.27*	
		For >250 To 500, Deduct	*-28.92*	
		For >500, Deduct	*-41.58*	
26 51 19 00-0323	EA	2' x 4', 4,000 Lumens, Surface Mount, Volumetric LED Fixture (Lithonia 2RTX4)	289.23	48.02
		For >50 To 100, Deduct	*-9.03*	
		For >100 To 250, Deduct	*-16.27*	
		For >250 To 500, Deduct	*-28.92*	
		For >500, Deduct	*-41.58*	
26 51 19 00-0324	EA	2' x 4', 4,800 Lumens, Surface Mount, Volumetric LED Fixture (Lithonia 2RTX4)	289.23	48.02
		For >50 To 100, Deduct	*-9.03*	
		For >100 To 250, Deduct	*-16.27*	
		For >250 To 500, Deduct	*-28.92*	
		For >500, Deduct	*-41.58*	
26 51 19 00-0325	EA	2' x 4', 6,000 Lumens, Surface Mount, Volumetric LED Fixture (Lithonia 2RTX4)	289.23	48.02
		For >50 To 100, Deduct	*-9.03*	
		For >100 To 250, Deduct	*-16.27*	
		For >250 To 500, Deduct	*-28.92*	
		For >500, Deduct	*-41.58*	

26 51 19 00-0326 Surface Mount, Volumetric LED Fixtures (Lithonia STL) *(26 51 19 00-0312)*

26 51 19 00-0327	EA	2' Length, 2,200 Lumens, Surface Mount, Volumetric LED Fixture (Lithonia STL2)	367.41	30.91
		For >50 To 100, Deduct	*-10.34*	
		For >100 To 250, Deduct	*-19.53*	
		For >250 To 500, Deduct	*-36.74*	
		For >500, Deduct	*-53.95*	
26 51 19 00-0328	EA	4' Length, 3,000 Lumens, Surface Mount, Volumetric LED Fixture (Lithonia STL4)	306.35	37.71
		For >50 To 100, Deduct	*-9.08*	
		For >100 To 250, Deduct	*-16.73*	
		For >250 To 500, Deduct	*-30.64*	
		For >500, Deduct	*-44.54*	
26 51 19 00-0329	EA	4' Length, 4,000 Lumens, Surface Mount, Volumetric LED Fixture (Lithonia STL4)	369.96	37.71
		For >50 To 100, Deduct	*-10.67*	
		For >100 To 250, Deduct	*-19.92*	
		For >250 To 500, Deduct	*-37.00*	
		For >500, Deduct	*-54.08*	

26 51 19 00-0330 Surface Mount, Wraparound LED Fixtures (Lithonia LBL) *(26 51 19 00-0312)*

26 51 19 00-0331	EA	2' Length, 2,000 Lumens, Surface Mount, Wraparound LED Fixture (Lithonia LBL2)	281.63	30.91
		For >50 To 100, Deduct	*-8.20*	
		For >100 To 250, Deduct	*-15.24*	
		For >250 To 500, Deduct	*-28.16*	
		For >500, Deduct	*-41.09*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0332	EA	4' Length, 4,000 Lumens, Surface Mount, Wraparound LED Fixture (Lithonia LBL4)	370.77	37.71
		For >50 To 100, Deduct	*-10.69*	
		For >100 To 250, Deduct	*-19.96*	
		For >250 To 500, Deduct	*-37.08*	
		For >500, Deduct	*-54.20*	

26 51 19 00-0333 Wall Bracket And Surface Mount LED Fixtures (Lithonia WL Series) *(26 51 19 00-0312)*

26 51 19 00-0334	EA	2' Length, 800 Lumens, Wall Bracket And Surface Mount LED Fixture (Lithonia WL2 Series)	326.02	37.23
		For >50 To 100, Deduct	*-9.56*	
		For >100 To 250, Deduct	*-17.71*	
		For >250 To 500, Deduct	*-32.60*	
		For >500, Deduct	*-47.49*	
26 51 19 00-0335	EA	2' Length, 1,200 Lumens, Wall Bracket And Surface Mount LED Fixture (Lithonia WL2 Series)	380.47	37.23
		For >50 To 100, Deduct	*-10.92*	
		For >100 To 250, Deduct	*-20.43*	
		For >250 To 500, Deduct	*-38.05*	
		For >500, Deduct	*-55.66*	
26 51 19 00-0336	EA	2' Length, 1,800 Lumens, Wall Bracket And Surface Mount LED Fixture (Lithonia WL2 Series)	434.93	37.23
		For >50 To 100, Deduct	*-12.28*	
		For >100 To 250, Deduct	*-23.16*	
		For >250 To 500, Deduct	*-43.49*	
		For >500, Deduct	*-63.83*	
26 51 19 00-0337	EA	2' Length, 2,200 Lumens, Wall Bracket And Surface Mount LED Fixture (Lithonia WL2 Series)	464.70	37.23
		For >50 To 100, Deduct	*-13.03*	
		For >100 To 250, Deduct	*-24.65*	
		For >250 To 500, Deduct	*-46.47*	
		For >500, Deduct	*-68.30*	
26 51 19 00-0338	EA	4' Length, 2,000 Lumens, Wall Bracket And Surface Mount LED Fixture (Lithonia WL4 Series)	479.58	45.12
		For >50 To 100, Deduct	*-13.68*	
		For >100 To 250, Deduct	*-25.67*	
		For >250 To 500, Deduct	*-47.96*	
		For >500, Deduct	*-70.25*	
26 51 19 00-0339	EA	4' Length, 3,000 Lumens, Wall Bracket And Surface Mount LED Fixture (Lithonia WL4 Series)	500.66	45.12
		For >50 To 100, Deduct	*-14.21*	
		For >100 To 250, Deduct	*-26.73*	
		For >250 To 500, Deduct	*-50.07*	
		For >500, Deduct	*-73.41*	
26 51 19 00-0340	EA	4' Length, 4,000 Lumens, Wall Bracket And Surface Mount LED Fixture (Lithonia WL4 Series)	561.26	45.12
		For >50 To 100, Deduct	*-15.72*	
		For >100 To 250, Deduct	*-29.76*	
		For >250 To 500, Deduct	*-56.13*	
		For >500, Deduct	*-82.50*	

26 51 19 00-0341 Surface Mount, Wall Bracket Fixtures (Lithonia WL2) *(26 51 19 00-0312)*

26 51 19 00-0342	EA	2', 771 Lumens, 7.5 Watt, 3000K CCT, Wall Bracket And Surface Mount LED Light Fixture (Lithonia Lighting WL2 08L LP830)	343.88	33.84
		For >50 To 100, Deduct	*-9.87*	
		For >100 To 250, Deduct	*-18.46*	
		For >250 To 500, Deduct	*-34.39*	
		For >500, Deduct	*-50.31*	
26 51 19 00-0343	EA	2', 809 Lumens, 7.5 Watt, 3500K CCT, Wall Bracket And Surface Mount LED Light Fixture (Lithonia Lighting WL2 08L LP835)	339.50	30.91
		For >50 To 100, Deduct	*-9.65*	
		For >100 To 250, Deduct	*-18.13*	
		For >250 To 500, Deduct	*-33.95*	
		For >500, Deduct	*-49.77*	
26 51 19 00-0344	EA	2', 848 Lumens, 7.5 Watt, 4000K CCT, Wall Bracket And Surface Mount LED Light Fixture (Lithonia Lighting WL2 08L LP840)	339.50	30.91
		For >50 To 100, Deduct	*-9.65*	
		For >100 To 250, Deduct	*-18.13*	
		For >250 To 500, Deduct	*-33.95*	
		For >500, Deduct	*-49.77*	
26 51 19 00-0345	EA	2', 877 Lumens, 7.5 Watt, 5000K CCT, Wall Bracket And Surface Mount LED Light Fixture (Lithonia Lighting WL2 08L LP850)	339.50	30.91
		For >50 To 100, Deduct	*-9.65*	
		For >100 To 250, Deduct	*-18.13*	
		For >250 To 500, Deduct	*-33.95*	
		For >500, Deduct	*-49.77*	
26 51 19 00-0346	EA	2', 1,190 Lumens, 12.2 Watt, 3000K CCT, Wall Bracket And Surface Mount LED Light Fixture (Lithonia Lighting WL2 12L LP830)	395.93	30.91
		For >50 To 100, Deduct	*-11.06*	
		For >100 To 250, Deduct	*-20.96*	
		For >250 To 500, Deduct	*-39.59*	
		For >500, Deduct	*-58.23*	
26 51 19 00-0347	EA	2', 1,249 Lumens, 12.2 Watt, 3500K CCT, Wall Bracket And Surface Mount LED Light Fixture (Lithonia Lighting WL2 12L LP835)	395.93	30.91
		For >50 To 100, Deduct	*-11.06*	
		For >100 To 250, Deduct	*-20.96*	
		For >250 To 500, Deduct	*-39.59*	
		For >500, Deduct	*-58.23*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0348	EA	2', 1,311 Lumens, 12.2 Watt, 4000K CCT, Wall Bracket And Surface Mount LED Light Fixture (Lithonia Lighting WL2 12L LP840)	395.93	30.91
		For >50 To 100, Deduct	*-11.06*	
		For >100 To 250, Deduct	*-20.96*	
		For >250 To 500, Deduct	*-39.59*	
		For >500, Deduct	*-58.23*	
26 51 19 00-0349	EA	2', 1,364 Lumens, 12.2 Watt, 5000K CCT, Wall Bracket And Surface Mount LED Light Fixture (Lithonia Lighting WL2 12L LP850)	395.93	30.91
		For >50 To 100, Deduct	*-11.06*	
		For >100 To 250, Deduct	*-20.96*	
		For >250 To 500, Deduct	*-39.59*	
		For >500, Deduct	*-58.23*	
26 51 19 00-0350	EA	2', 1,711 Lumens, 17.5 Watt, 3000K CCT, Wall Bracket And Surface Mount LED Light Fixture (Lithonia Lighting WL2 18L LP830)	424.08	30.91
		For >50 To 100, Deduct	*-11.76*	
		For >100 To 250, Deduct	*-22.36*	
		For >250 To 500, Deduct	*-42.41*	
		For >500, Deduct	*-62.45*	
26 51 19 00-0351	EA	2', 1,796 Lumens, 17.5 Watt, 3500K CCT, Wall Bracket And Surface Mount LED Light Fixture (Lithonia Lighting WL2 18L LP835)	424.08	30.91
		For >50 To 100, Deduct	*-11.76*	
		For >100 To 250, Deduct	*-22.36*	
		For >250 To 500, Deduct	*-42.41*	
		For >500, Deduct	*-62.45*	
26 51 19 00-0352	EA	2', 1,889 Lumens, 17.5 Watt, 4000K CCT, Wall Bracket And Surface Mount LED Light Fixture (Lithonia Lighting WL2 18L LP840)	424.08	30.91
		For >50 To 100, Deduct	*-11.76*	
		For >100 To 250, Deduct	*-22.36*	
		For >250 To 500, Deduct	*-42.41*	
		For >500, Deduct	*-62.45*	
26 51 19 00-0353	EA	2', 1,966 Lumens, 17.5 Watt, 5000K CCT, Wall Bracket And Surface Mount LED Light Fixture (Lithonia Lighting WL2 18L LP850)	424.08	30.91
		For >50 To 100, Deduct	*-11.76*	
		For >100 To 250, Deduct	*-22.36*	
		For >250 To 500, Deduct	*-42.41*	
		For >500, Deduct	*-62.45*	
26 51 19 00-0354	EA	2', 2,086 Lumens, 21 Watt, 3000K CCT, Wall Bracket And Surface Mount LED Light Fixture (Lithonia Lighting WL2 22L LP830)	424.08	30.91
		For >50 To 100, Deduct	*-11.76*	
		For >100 To 250, Deduct	*-22.36*	
		For >250 To 500, Deduct	*-42.41*	
		For >500, Deduct	*-62.45*	
26 51 19 00-0355	EA	2', 2,120.5 Lumens, 21 Watt, 3500K CCT, Wall Bracket And Surface Mount LED Light Fixture (Lithonia Lighting WL2 22L LP835)	424.08	30.91
		For >50 To 100, Deduct	*-11.76*	
		For >100 To 250, Deduct	*-22.36*	
		For >250 To 500, Deduct	*-42.41*	
		For >500, Deduct	*-62.45*	
26 51 19 00-0356	EA	2', 2,189.4 Lumens, 21 Watt, 4000K CCT, Wall Bracket And Surface Mount LED Light Fixture (Lithonia Lighting WL2 22L LP840)	424.08	30.91
		For >50 To 100, Deduct	*-11.76*	
		For >100 To 250, Deduct	*-22.36*	
		For >250 To 500, Deduct	*-42.41*	
		For >500, Deduct	*-62.45*	
26 51 19 00-0357	EA	2', 2,258.4 Lumens, 21 Watt, 5000K CCT, Wall Bracket And Surface Mount LED Light Fixture (Lithonia Lighting WL2 22L LP850)	424.08	30.91
		For >50 To 100, Deduct	*-11.76*	
		For >100 To 250, Deduct	*-22.36*	
		For >250 To 500, Deduct	*-42.41*	
		For >500, Deduct	*-62.45*	
26 51 19 00-0358		Surface Mount, Shadow Box Style LED Fixtures *(26 51 19 00-0312)*		
26 51 19 00-0359		Surface Mount, Shadow Box Style LED Fixtures (Lithonia SBSLX) *(26 51 19 00-0358)*		
26 51 19 00-0360	EA	2' x 2', 3,300 Lumens, Surface Mount, Shadow Box Style LED Fixture (Lithonia 2SBSLX2)	847.04	41.22
		For >50 To 100, Deduct	*-22.72*	
		For >100 To 250, Deduct	*-43.90*	
		For >250 To 500, Deduct	*-84.70*	
		For >500, Deduct	*-125.51*	
26 51 19 00-0361	EA	2' x 4', 4,600 Lumens, Surface Mount, Shadow Box Style LED Fixture (Lithonia 2SBSLX4)	1,088.87	48.02
		For >50 To 100, Deduct	*-29.03*	
		For >100 To 250, Deduct	*-56.25*	
		For >250 To 500, Deduct	*-108.89*	
		For >500, Deduct	*-161.53*	
26 51 19 00-0362		Surface Mount, Low Profile Fixtures *(26 51 19 00-0312)*		
26 51 19 00-0363	EA	6" Diameter, 993 Lumens, Low Profile Surface Mount, LED Fixture (RP Lighting - 8538-90)	104.76	28.25
		For >50 To 100, Deduct	*-4.03*	
		For >100 To 250, Deduct	*-6.65*	
		For >250 To 500, Deduct	*-10.48*	
		For >500, Deduct	*-14.30*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0364	EA	6" Diameter, 1,215 Lumens, Low Profile Surface Mount, LED Fixture (RP Lighting - 8569)	83.81	28.25
		For >50 To 100, Deduct	*-3.51*	
		For >100 To 250, Deduct	*-5.60*	
		For >250 To 500, Deduct	*-8.38*	
		For >500, Deduct	*-11.16*	
26 51 19 00-0365	EA	13" Diameter, 1,400 Lumens, Low Profile Surface Mount, LED Fixture (RP Lighting - 4329)	148.75	28.25
		For >50 To 100, Deduct	*-5.13*	
		For >100 To 250, Deduct	*-8.85*	
		For >250 To 500, Deduct	*-14.88*	
		For >500, Deduct	*-20.90*	
26 51 19 00-0366	EA	15" Diameter, 2,100 Lumens, Low Profile Surface Mount, LED Fixture (RP Lighting 4330)	182.27	28.25
		For >50 To 100, Deduct	*-5.97*	
		For >100 To 250, Deduct	*-10.53*	
		For >250 To 500, Deduct	*-18.23*	
		For >500, Deduct	*-25.93*	
26 51 19 00-0367		**Recessed LED Downlights** *(26 51 19 00-0001)*		
26 51 19 00-0368		**Recessed LED Downlights** *(26 51 19 00-0367)*		
26 51 19 00-0369		**Recessed LED Downlights (Lithonia)** *(26 51 19 00-0368)*		
		Note: Includes housing and trim.		
26 51 19 00-0370	EA	8" Diameter, 1,200 Lumens, Recessed LED Downlight With Open Trim (Lithonia DOM8 LED)	414.65	49.63
		For Dimming Driver And Sensor Switch nLight Dimming Relay, Add	*88.53*	
		For >50 To 100, Deduct	*-12.23*	
		For >100 To 250, Deduct	*-22.59*	
		For >250 To 500, Deduct	*-41.47*	
		For >500, Deduct	*-60.34*	
26 51 19 00-0371	EA	8" Diameter, 1,500 Lumens, Recessed LED Downlight With Open Trim (Lithonia DOM8 LED)	451.52	49.63
		For Dimming Driver And Sensor Switch nLight Dimming Relay, Add	*88.53*	
		For >50 To 100, Deduct	*-13.15*	
		For >100 To 250, Deduct	*-24.44*	
		For >250 To 500, Deduct	*-45.15*	
		For >500, Deduct	*-65.87*	
26 51 19 00-0372		**Recessed LED Downlights (Portfolio®)** *(26 51 19 00-0368)*		
		Note: Includes housing and trim.		
26 51 19 00-0373	EA	4" Diameter, 1,300 Lumens, Recessed LED Downlight With Open Trim (Portfolio® LD413)	257.86	49.63
		For >50 To 100, Deduct	*-8.31*	
		For >100 To 250, Deduct	*-14.75*	
		For >250 To 500, Deduct	*-25.79*	
		For >500, Deduct	*-36.82*	
26 51 19 00-0374		**Recessed LED Downlights (Gotham® EVO®)** *(26 51 19 00-0368)*		
		Note: Includes housing and trim.		
26 51 19 00-0375	EA	6" Diameter, 1,800 Lumens, Recessed LED Downlight With Open Trim (Gotham® EVO® ALED)	306.43	49.63
		For >50 To 100, Deduct	*-9.52*	
		For >100 To 250, Deduct	*-17.18*	
		For >250 To 500, Deduct	*-30.64*	
		For >500, Deduct	*-44.10*	
26 51 19 00-0376	EA	6" Diameter, 1,800 Lumens, Recessed LED Shower Downlight With Non-Conductive Regressed Lens (Gotham® EVO® ALED)	316.32	49.63
		For >50 To 100, Deduct	*-9.77*	
		For >100 To 250, Deduct	*-17.68*	
		For >250 To 500, Deduct	*-31.63*	
		For >500, Deduct	*-45.59*	
26 51 19 00-0377	EA	6" Diameter, 1,800 Lumens, Recessed LED Wallwash Downlight With Specular Reflector Trim (Gotham® EVO® DLWLED)	356.90	49.63
		For >50 To 100, Deduct	*-10.78*	
		For >100 To 250, Deduct	*-19.71*	
		For >250 To 500, Deduct	*-35.69*	
		For >500, Deduct	*-51.67*	
26 51 19 00-0378	EA	6" Diameter, 1,800 Lumens, Decorative Recessed LED Downlight With Glass Drop Luminous Ring (Gotham® EVO® ALED)	360.87	49.63
		For >50 To 100, Deduct	*-10.88*	
		For >100 To 250, Deduct	*-19.90*	
		For >250 To 500, Deduct	*-36.09*	
		For >500, Deduct	*-52.27*	
26 51 19 00-0379	EA	6" Diameter, 1,800 Lumens, Vandal Resistant, Recessed LED Downlight With Tempered Prismatic Lens (Gotham® EVO® VRALED)	395.50	49.63
		For >50 To 100, Deduct	*-11.75*	
		For >100 To 250, Deduct	*-21.64*	
		For >250 To 500, Deduct	*-39.55*	
		For >500, Deduct	*-57.46*	
26 51 19 00-0380		**Recessed LED Downlights (Lightolier)** *(26 51 19 00-0368)*		
		Note: Includes housing and trim.		
26 51 19 00-0381	EA	4" Diameter, 500 Lumens, Recessed LED Downlight With Open Trim (Lightolier C4L05DL)	628.80	49.63
		For >50 To 100, Deduct	*-17.58*	
		For >100 To 250, Deduct	*-33.30*	
		For >250 To 500, Deduct	*-62.88*	
		For >500, Deduct	*-92.46*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0382	EA	4" Diameter, 1,000 Lumens, Recessed LED Downlight With Open Trim (Lightolier C4L10DL)	739.96	49.63
		For >50 To 100, Deduct	*-20.36*	
		For >100 To 250, Deduct	*-38.86*	
		For >250 To 500, Deduct	*-74.00*	
		For >500, Deduct	*-109.13*	
26 51 19 00-0383	EA	6" Diameter, 1,500 Lumens, Recessed LED Downlight With Open Trim (Lightolier C6L1520DL)	795.41	49.63
		For >50 To 100, Deduct	*-21.75*	
		For >100 To 250, Deduct	*-41.63*	
		For >250 To 500, Deduct	*-79.54*	
		For >500, Deduct	*-117.45*	
26 51 19 00-0384	EA	6" Diameter, 2,000 Lumens, Recessed LED Downlight With Open Trim (Lightolier C6L1520DL)	795.41	49.63
		For >50 To 100, Deduct	*-21.75*	
		For >100 To 250, Deduct	*-41.63*	
		For >250 To 500, Deduct	*-79.54*	
		For >500, Deduct	*-117.45*	
26 51 19 00-0385	EA	7" Diameter, 1,500 Lumens, Recessed LED Downlight With Open Trim (Lightolier C7L1520DL)	823.26	49.63
		For >50 To 100, Deduct	*-22.44*	
		For >100 To 250, Deduct	*-43.02*	
		For >250 To 500, Deduct	*-82.33*	
		For >500, Deduct	*-121.63*	
26 51 19 00-0386	EA	7" Diameter, 2,000 Lumens, Recessed LED Downlight With Open Trim (Lightolier C7L1520DL)	851.13	49.63
		For >50 To 100, Deduct	*-23.14*	
		For >100 To 250, Deduct	*-44.42*	
		For >250 To 500, Deduct	*-85.11*	
		For >500, Deduct	*-125.81*	

26 51 19 00-0387 Recessed LED Downlights (Cree®) *(26 51 19 00-0368)*

Note: Includes housing and trim.

26 51 19 00-0388	EA	6" Diameter, IC Rated, Surface Mount LED Downlight Fixture Housing, White (Cree® SC6-277V)	155.74	49.63
		For >50 To 100, Deduct	*-5.75*	
		For >100 To 250, Deduct	*-9.65*	
		For >250 To 500, Deduct	*-15.57*	
		For >500, Deduct	*-21.50*	
26 51 19 00-0389	EA	6" Diameter, IC Rated, Surface Mount LED Downlight Fixture Housing, White (Cree® SC6-GU24)	146.51	49.63
		For >50 To 100, Deduct	*-5.52*	
		For >100 To 250, Deduct	*-9.19*	
		For >250 To 500, Deduct	*-14.65*	
		For >500, Deduct	*-20.12*	
26 51 19 00-0390	EA	6" Diameter, IC Rated, Surface Mount LED Downlight Fixture Housing, Black (Cree® SC6-BL-GU24)	153.91	49.63
		For >50 To 100, Deduct	*-5.71*	
		For >100 To 250, Deduct	*-9.56*	
		For >250 To 500, Deduct	*-15.39*	
		For >500, Deduct	*-21.23*	
26 51 19 00-0391	EA	6" Diameter, IC Rated, Surface Mount LED Downlight Fixture Housing, Black (Cree® SC6-BL-277V)	163.14	49.63
		For >50 To 100, Deduct	*-5.94*	
		For >100 To 250, Deduct	*-10.02*	
		For >250 To 500, Deduct	*-16.31*	
		For >500, Deduct	*-22.61*	
26 51 19 00-0392	EA	6" Diameter, IC Rated, Pendant Mount LED Downlight Fixture Housing, White (Cree® SC6-CM-GU24)	164.99	49.63
		For >50 To 100, Deduct	*-5.99*	
		For >100 To 250, Deduct	*-10.11*	
		For >250 To 500, Deduct	*-16.50*	
		For >500, Deduct	*-22.89*	
26 51 19 00-0393	EA	6" Diameter, IC Rated, Cord Mount LED Downlight Fixture Housing, White (Cree® SC6-CM-277V)	174.23	49.63
		For >50 To 100, Deduct	*-6.22*	
		For >100 To 250, Deduct	*-10.57*	
		For >250 To 500, Deduct	*-17.42*	
		For >500, Deduct	*-24.27*	
26 51 19 00-0394	EA	6" Diameter, IC Rated, Pendant Mount LED Downlight Fixture Housing, Black (Cree® SC6-CM-BL-GU24)	172.38	49.63
		For >50 To 100, Deduct	*-6.17*	
		For >100 To 250, Deduct	*-10.48*	
		For >250 To 500, Deduct	*-17.24*	
		For >500, Deduct	*-24.00*	
26 51 19 00-0395	EA	6" Diameter, IC Rated, Pendant Mount LED Downlight Fixture Housing, Black (Cree® SC6-CM-BL-277V)	181.63	49.63
		For >50 To 100, Deduct	*-6.40*	
		For >100 To 250, Deduct	*-10.94*	
		For >250 To 500, Deduct	*-18.16*	
		For >500, Deduct	*-25.38*	
26 51 19 00-0396	EA	6" Diameter, IC Rated, Wall Mount LED Downlight Fixture Housing, White (Cree® SC6-WM-GU24)	174.23	49.63
		For >50 To 100, Deduct	*-6.22*	
		For >100 To 250, Deduct	*-10.57*	
		For >250 To 500, Deduct	*-17.42*	
		For >500, Deduct	*-24.27*	
26 51 19 00-0397	EA	6" Diameter, IC Rated, Wall Mount LED Downlight Fixture Housing, White (Cree® SC6-WM-277V)	183.46	49.63
		For >50 To 100, Deduct	*-6.45*	
		For >100 To 250, Deduct	*-11.03*	
		For >250 To 500, Deduct	*-18.35*	
		For >500, Deduct	*-25.66*	
26 51 19 00-0398	EA	6" Diameter, IC Rated, Wall Mount LED Downlight Fixture Housing, Black (Cree® SC6-WM-BL-GU24)	181.63	49.63
		For >50 To 100, Deduct	*-6.40*	
		For >100 To 250, Deduct	*-10.94*	
		For >250 To 500, Deduct	*-18.16*	
		For >500, Deduct	*-25.38*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0399		Recessed LED Downlights (Cooper) *(26 51 19 00-0368)*		
26 51 19 00-0400	EA	600 Lumens, 2700K CCT, LED Downlight (Cooper Halo ML5606827)	157.48	49.63
		For >50 To 100, Deduct	*-5.80*	
		For >100 To 250, Deduct	*-9.74*	
		For >250 To 500, Deduct	*-15.75*	
		For >500, Deduct	*-21.76*	
26 51 19 00-0401	EA	600 Lumens, 3000K CCT, LED Downlight (Cooper Halo ML5606830)	157.48	49.63
		For >50 To 100, Deduct	*-5.80*	
		For >100 To 250, Deduct	*-9.74*	
		For >250 To 500, Deduct	*-15.75*	
		For >500, Deduct	*-21.76*	
26 51 19 00-0402	EA	600 Lumens, 3500K CCT, LED Downlight (Cooper Halo ML5606835)	157.48	49.63
		For >50 To 100, Deduct	*-5.80*	
		For >100 To 250, Deduct	*-9.74*	
		For >250 To 500, Deduct	*-15.75*	
		For >500, Deduct	*-21.76*	
26 51 19 00-0403	EA	600 Lumens, 4000K CCT, LED Downlight (Cooper Halo ML5606840)	157.48	49.63
		For >50 To 100, Deduct	*-5.80*	
		For >100 To 250, Deduct	*-9.74*	
		For >250 To 500, Deduct	*-15.75*	
		For >500, Deduct	*-21.76*	
26 51 19 00-0404	EA	900 Lumens, 2700K CCT, LED Downlight (Cooper Halo ML5609827)	160.57	49.63
		For >50 To 100, Deduct	*-5.88*	
		For >100 To 250, Deduct	*-9.89*	
		For >250 To 500, Deduct	*-16.06*	
		For >500, Deduct	*-22.22*	
26 51 19 00-0405	EA	900 Lumens, 3000K CCT, LED Downlight (Cooper Halo ML5609830)	160.57	49.63
		For >50 To 100, Deduct	*-5.88*	
		For >100 To 250, Deduct	*-9.89*	
		For >250 To 500, Deduct	*-16.06*	
		For >500, Deduct	*-22.22*	
26 51 19 00-0406	EA	900 Lumens, 3500K CCT, LED Downlight (Cooper Halo ML5609835)	160.57	49.63
		For >50 To 100, Deduct	*-5.88*	
		For >100 To 250, Deduct	*-9.89*	
		For >250 To 500, Deduct	*-16.06*	
		For >500, Deduct	*-22.22*	
26 51 19 00-0407	EA	900 Lumens, 4000K CCT, LED Downlight (Cooper Halo ML5609840)	160.57	49.63
		For >50 To 100, Deduct	*-5.88*	
		For >100 To 250, Deduct	*-9.89*	
		For >250 To 500, Deduct	*-16.06*	
		For >500, Deduct	*-22.22*	
26 51 19 00-0408	EA	1,200 Lumens, 2700K CCT, LED Downlight (Cooper Halo ML5612827)	202.49	49.63
		For >50 To 100, Deduct	*-6.92*	
		For >100 To 250, Deduct	*-11.99*	
		For >250 To 500, Deduct	*-20.25*	
		For >500, Deduct	*-28.51*	
26 51 19 00-0409	EA	1,200 Lumens, 3000K CCT, LED Downlight (Cooper Halo ML5612830)	200.36	49.63
		For >50 To 100, Deduct	*-6.87*	
		For >100 To 250, Deduct	*-11.88*	
		For >250 To 500, Deduct	*-20.04*	
		For >500, Deduct	*-28.19*	
26 51 19 00-0410	EA	1,200 Lumens, 3500K CCT, LED Downlight (Cooper Halo ML5612835)	200.36	49.63
		For >50 To 100, Deduct	*-6.87*	
		For >100 To 250, Deduct	*-11.88*	
		For >250 To 500, Deduct	*-20.04*	
		For >500, Deduct	*-28.19*	
26 51 19 00-0411	EA	1,200 Lumens, 4000K CCT, LED Downlight (Cooper Halo ML5612840)	200.36	49.63
		For >50 To 100, Deduct	*-6.87*	
		For >100 To 250, Deduct	*-11.88*	
		For >250 To 500, Deduct	*-20.04*	
		For >500, Deduct	*-28.19*	
26 51 19 00-0412	EA	5" LED Trim, Polymer Dead-Front, Shallow White Baffle And Flange (Cooper Halo 591WB)	98.29	15.79
		For >50 To 100, Deduct	*-3.05*	
		For >100 To 250, Deduct	*-5.51*	
		For >250 To 500, Deduct	*-9.83*	
		For >500, Deduct	*-14.15*	
26 51 19 00-0413	EA	5" LED Trim, Specular Reflector And White Flange (Cooper Halo 592SC)	59.92	15.79
		For >50 To 100, Deduct	*-2.09*	
		For >100 To 250, Deduct	*-3.59*	
		For >250 To 500, Deduct	*-5.99*	
		For >500, Deduct	*-8.40*	
26 51 19 00-0414	EA	5" LED Trim, Haze Reflector And White Flange (Cooper Halo 592H)	76.43	15.79
		For >50 To 100, Deduct	*-2.50*	
		For >100 To 250, Deduct	*-4.41*	
		For >250 To 500, Deduct	*-7.64*	
		For >500, Deduct	*-10.87*	
26 51 19 00-0415	EA	5" LED Trim, White Reflector And Flange (Cooper Halo 592W)	63.24	15.79
		For >50 To 100, Deduct	*-2.17*	
		For >100 To 250, Deduct	*-3.75*	
		For >250 To 500, Deduct	*-6.32*	
		For >500, Deduct	*-8.89*	
26 51 19 00-0416	EA	5" LED Trim, White Micro-Step Baffle And Flange (Cooper Halo 593WB)	49.75	15.79
		For >50 To 100, Deduct	*-1.84*	
		For >100 To 250, Deduct	*-3.08*	
		For >250 To 500, Deduct	*-4.98*	
		For >500, Deduct	*-6.87*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0417	EA	5" LED Trim, Black Micro-Step Baffle And White Flange (Cooper Halo 593BB)	62.65	15.79
		For >50 To 100, Deduct	*-2.16*	
		For >100 To 250, Deduct	*-3.72*	
		For >250 To 500, Deduct	*-6.27*	
		For >500, Deduct	*-8.81*	
26 51 19 00-0418	EA	5" LED Trim, Satin Nickel Micro-Step Baffle And Flange (Cooper Halo 593SNB)	70.50	15.79
		For >50 To 100, Deduct	*-2.35*	
		For >100 To 250, Deduct	*-4.12*	
		For >250 To 500, Deduct	*-7.05*	
		For >500, Deduct	*-9.98*	
26 51 19 00-0419	EA	5" LED Trim, Tuscan Bronze Micro-Step Baffle And Flange (Cooper Halo 593TBZB)	77.50	15.79
		For >50 To 100, Deduct	*-2.53*	
		For >100 To 250, Deduct	*-4.47*	
		For >250 To 500, Deduct	*-7.75*	
		For >500, Deduct	*-11.03*	
26 51 19 00-0420	EA	5" LED Directional Trim, White eyeball, Baffle And Flange (Cooper Halo 594WB)	91.18	15.79
		For >50 To 100, Deduct	*-2.87*	
		For >100 To 250, Deduct	*-5.15*	
		For >250 To 500, Deduct	*-9.12*	
		For >500, Deduct	*-13.08*	
26 51 19 00-0421	EA	5" LED Directional Trim, Satin Nickel eyeball, Baffle And Flange (Cooper Halo 594SNB)	91.62	15.79
		For >50 To 100, Deduct	*-2.88*	
		For >100 To 250, Deduct	*-5.17*	
		For >250 To 500, Deduct	*-9.16*	
		For >500, Deduct	*-13.15*	
26 51 19 00-0422	EA	5" LED Directional Trim, Tuscan Bronze eyeball, Baffle And Flange (Cooper Halo 594TBZB)	89.65	15.79
		For >50 To 100, Deduct	*-2.83*	
		For >100 To 250, Deduct	*-5.07*	
		For >250 To 500, Deduct	*-8.97*	
		For >500, Deduct	*-12.86*	
26 51 19 00-0423	EA	5" LED Trim, Wall Wash - Specular reflector, repositionable Specular kick reflector, White Flange (Cooper Halo 595WW)	112.08	15.79
		For >50 To 100, Deduct	*-3.39*	
		For >100 To 250, Deduct	*-6.20*	
		For >250 To 500, Deduct	*-11.21*	
		For >500, Deduct	*-16.22*	
26 51 19 00-0424	EA	5" LED Trim, White Shallow Baffle And Flange (Cooper Halo 596WB)	50.23	15.79
		For >50 To 100, Deduct	*-1.85*	
		For >100 To 250, Deduct	*-3.10*	
		For >250 To 500, Deduct	*-5.02*	
		For >500, Deduct	*-6.94*	
26 51 19 00-0425	EA	6" LED Trim, Polymer Dead-Front, White Shallow Baffle And Flange (Cooper Halo 691WB)	95.01	15.79
		For >50 To 100, Deduct	*-2.97*	
		For >100 To 250, Deduct	*-5.34*	
		For >250 To 500, Deduct	*-9.50*	
		For >500, Deduct	*-13.66*	
26 51 19 00-0426	EA	6" LED Trim, Specular Reflector And White Flange (Cooper Halo 692SC)	79.91	15.79
		For >50 To 100, Deduct	*-2.59*	
		For >100 To 250, Deduct	*-4.59*	
		For >250 To 500, Deduct	*-7.99*	
		For >500, Deduct	*-11.39*	
26 51 19 00-0427	EA	6" LED Trim, Haze Reflector And White Flange (Cooper Halo 692H)	74.61	15.79
		For >50 To 100, Deduct	*-2.46*	
		For >100 To 250, Deduct	*-4.32*	
		For >250 To 500, Deduct	*-7.46*	
		For >500, Deduct	*-10.60*	
26 51 19 00-0428	EA	6" LED Trim, White Reflector And Flange (Cooper Halo 692W)	65.88	15.79
		For >50 To 100, Deduct	*-2.24*	
		For >100 To 250, Deduct	*-3.89*	
		For >250 To 500, Deduct	*-6.59*	
		For >500, Deduct	*-9.29*	
26 51 19 00-0429	EA	6" LED Trim, White Micro-Step Baffle And Flange (Cooper Halo 693WB)	66.51	15.79
		For >50 To 100, Deduct	*-2.26*	
		For >100 To 250, Deduct	*-3.92*	
		For >250 To 500, Deduct	*-6.65*	
		For >500, Deduct	*-9.38*	
26 51 19 00-0430	EA	6" LED Trim, Black Micro-Step Baffle And White Flange (Cooper Halo 693BB)	72.11	15.79
		For >50 To 100, Deduct	*-2.40*	
		For >100 To 250, Deduct	*-4.20*	
		For >250 To 500, Deduct	*-7.21*	
		For >500, Deduct	*-10.22*	
26 51 19 00-0431	EA	6" LED Trim, Satin Nickel Micro-Step Baffle And Flange (Cooper Halo 693SNB)	65.53	15.79
		For >50 To 100, Deduct	*-2.23*	
		For >100 To 250, Deduct	*-3.87*	
		For >250 To 500, Deduct	*-6.55*	
		For >500, Deduct	*-9.24*	
26 51 19 00-0432	EA	6" LED Trim, Tuscan Bronze Micro-Step Baffle And Flange (Cooper Halo 693TBZB)	83.41	15.79
		For >50 To 100, Deduct	*-2.68*	
		For >100 To 250, Deduct	*-4.76*	
		For >250 To 500, Deduct	*-8.34*	
		For >500, Deduct	*-11.92*	
26 51 19 00-0433	EA	6" LED Directional Trim, White eyeball, Baffle And Flange (Cooper Halo 694WB)	90.94	15.79
		For >50 To 100, Deduct	*-2.87*	
		For >100 To 250, Deduct	*-5.14*	
		For >250 To 500, Deduct	*-9.09*	
		For >500, Deduct	*-13.05*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0434	EA	6" LED Directional Trim, Satin Nickel eyeball, Baffle And Flange (Cooper Halo 694SNB)	116.01	15.79
		For >50 To 100, Deduct	*-3.49*	
		For >100 To 250, Deduct	*-6.39*	
		For >250 To 500, Deduct	*-11.60*	
		For >500, Deduct	*-16.81*	
26 51 19 00-0435	EA	6" LED Directional Trim, Tuscan Bronze eyeball, Baffle And Flange (Cooper Halo 694TBZB)	112.87	15.79
		For >50 To 100, Deduct	*-3.41*	
		For >100 To 250, Deduct	*-6.24*	
		For >250 To 500, Deduct	*-11.29*	
		For >500, Deduct	*-16.34*	
26 51 19 00-0436	EA	6" LED Trim, Wall Wash - Specular reflector, repositionable Specular kick reflector, White Flange (Cooper Halo 695WW)	114.25	15.79
		For >50 To 100, Deduct	*-3.45*	
		For >100 To 250, Deduct	*-6.30*	
		For >250 To 500, Deduct	*-11.43*	
		For >500, Deduct	*-16.55*	
26 51 19 00-0437	EA	6" LED Trim, White Shallow Baffle And Flange (Cooper Halo 696WB)	67.26	15.79
		For >50 To 100, Deduct	*-2.27*	
		For >100 To 250, Deduct	*-3.96*	
		For >250 To 500, Deduct	*-6.73*	
		For >500, Deduct	*-9.50*	
26 51 19 00-0438	EA	6" LED, Insulated Ceiling, Air-Tite, New Construction Housing (Cooper Halo H750ICAT)	57.50	33.84
		For >50 To 100, Deduct	*-2.71*	
		For >100 To 250, Deduct	*-4.14*	
		For >250 To 500, Deduct	*-5.75*	
		For >500, Deduct	*-7.36*	
26 51 19 00-0439	EA	6" LED, Insulated Ceiling, Air-Tite, Remodel Housing (Cooper Halo H750RICAT)	63.64	33.84
		For >50 To 100, Deduct	*-2.86*	
		For >100 To 250, Deduct	*-4.45*	
		For >250 To 500, Deduct	*-6.36*	
		For >500, Deduct	*-8.28*	
26 51 19 00-0440	EA	6" LED, Non-IC, Air-Tite, New Construction Housing (Cooper Halo H750T)	61.18	33.84
		For >50 To 100, Deduct	*-2.80*	
		For >100 To 250, Deduct	*-4.33*	
		For >250 To 500, Deduct	*-6.12*	
		For >500, Deduct	*-7.91*	
26 51 19 00-0441	EA	6" LED, Non-IC, New Construction/Remodel Chicago Plenum Housing (Cooper Halo H750TCP)	85.37	33.84
		For >50 To 100, Deduct	*-3.40*	
		For >100 To 250, Deduct	*-5.54*	
		For >250 To 500, Deduct	*-8.54*	
		For >500, Deduct	*-11.54*	
26 51 19 00-0442	EA	6" LED, Shallow, Insulated Ceiling, Air-Tite, New Constr. (Cooper Halo H2750ICAT)	82.53	33.84
		For >50 To 100, Deduct	*-3.33*	
		For >100 To 250, Deduct	*-5.40*	
		For >250 To 500, Deduct	*-8.25*	
		For >500, Deduct	*-11.11*	
26 51 19 00-0443	EA	6" Insulated Ceiling, Air-Tite New Construction Housing (Cooper Halo H7ICAT)	64.47	33.84
		For >50 To 100, Deduct	*-2.88*	
		For >100 To 250, Deduct	*-4.49*	
		For >250 To 500, Deduct	*-6.45*	
		For >500, Deduct	*-8.40*	
26 51 19 00-0444	EA	6" Insulated Ceiling, Air-Tite Remodel Housing (Cooper Halo H7RICAT)	68.61	33.84
		For >50 To 100, Deduct	*-2.98*	
		For >100 To 250, Deduct	*-4.70*	
		For >250 To 500, Deduct	*-6.86*	
		For >500, Deduct	*-9.02*	
26 51 19 00-0445	EA	6" Insulated Ceiling, New Construction Housing (Cooper Halo H7ICT)	63.61	33.84
		For >50 To 100, Deduct	*-2.86*	
		For >100 To 250, Deduct	*-4.45*	
		For >250 To 500, Deduct	*-6.36*	
		For >500, Deduct	*-8.27*	
26 51 19 00-0446	EA	6" Insulated Ceiling, Remodel Housing (Cooper Halo H7RICT)	68.14	33.84
		For >50 To 100, Deduct	*-2.97*	
		For >100 To 250, Deduct	*-4.68*	
		For >250 To 500, Deduct	*-6.81*	
		For >500, Deduct	*-8.95*	
26 51 19 00-0447	EA	6" Insulated Ceiling, Air-Tite New Construction Housing, No Socket Bracket (Cooper Halo H7ICATNB)	64.36	33.84
		For >50 To 100, Deduct	*-2.88*	
		For >100 To 250, Deduct	*-4.49*	
		For >250 To 500, Deduct	*-6.44*	
		For >500, Deduct	*-8.39*	
26 51 19 00-0448	EA	6" Insulated Ceiling, New Construction Housing, No Socket Bracket (Cooper Halo H7ICTNB)	63.94	33.84
		For >50 To 100, Deduct	*-2.87*	
		For >100 To 250, Deduct	*-4.47*	
		For >250 To 500, Deduct	*-6.39*	
		For >500, Deduct	*-8.32*	
26 51 19 00-0449	EA	6" Non-IC, New Construction Housing (Cooper Halo H7T)	67.21	33.84
		For >50 To 100, Deduct	*-2.95*	
		For >100 To 250, Deduct	*-4.63*	
		For >250 To 500, Deduct	*-6.72*	
		For >500, Deduct	*-8.81*	
26 51 19 00-0450	EA	6" Non-IC, Remodel Housing (Cooper Halo H7RT)	68.98	33.84
		For >50 To 100, Deduct	*-2.99*	
		For >100 To 250, Deduct	*-4.72*	
		For >250 To 500, Deduct	*-6.90*	
		For >500, Deduct	*-9.08*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0451	EA	6" Non-IC, New Construction Housing, No Socket Bracket (Cooper Halo H7TNB)	69.54	33.84
		For >50 To 100, Deduct	*-3.01*	
		For >100 To 250, Deduct	*-4.75*	
		For >250 To 500, Deduct	*-6.95*	
		For >500, Deduct	*-9.16*	
26 51 19 00-0452	EA	6" Non-IC, Chicago Plenum, New Construction/Remodel Housing (Cooper Halo H7TCP)	96.94	33.84
		For >50 To 100, Deduct	*-3.69*	
		For >100 To 250, Deduct	*-6.12*	
		For >250 To 500, Deduct	*-9.69*	
		For >500, Deduct	*-13.27*	
26 51 19 00-0453	EA	6" Insulated Ceiling, Universal New Construction Housing (Cooper Halo H7UICT)	90.06	33.84
		For >50 To 100, Deduct	*-3.52*	
		For >100 To 250, Deduct	*-5.77*	
		For >250 To 500, Deduct	*-9.01*	
		For >500, Deduct	*-12.24*	
26 51 19 00-0454	EA	6" Insulated Ceiling, Universal, Air-Tite, New Construction Housing (Cooper Halo H7UICAT)	90.86	33.84
		For >50 To 100, Deduct	*-3.54*	
		For >100 To 250, Deduct	*-5.81*	
		For >250 To 500, Deduct	*-9.09*	
		For >500, Deduct	*-12.36*	
26 51 19 00-0455	EA	6" Insulated Ceiling, Air-Tite New Construction Housing (Cooper Halo EI700AT)	95.46	33.84
		For >50 To 100, Deduct	*-3.66*	
		For >100 To 250, Deduct	*-6.04*	
		For >250 To 500, Deduct	*-9.55*	
		For >500, Deduct	*-13.05*	
26 51 19 00-0456	EA	6" Insulated Ceiling, Air-Tite Remodel Housing (Cooper Halo EI700RAT)	95.46	33.84
		For >50 To 100, Deduct	*-3.66*	
		For >100 To 250, Deduct	*-6.04*	
		For >250 To 500, Deduct	*-9.55*	
		For >500, Deduct	*-13.05*	
26 51 19 00-0457	EA	6" Insulated Ceiling, New Construction Housing (Cooper Halo EI700)	95.46	33.84
		For >50 To 100, Deduct	*-3.66*	
		For >100 To 250, Deduct	*-6.04*	
		For >250 To 500, Deduct	*-9.55*	
		For >500, Deduct	*-13.05*	
26 51 19 00-0458	EA	6" Insulated Ceiling, Remodel Housing (Cooper Halo EI700R)	95.46	33.84
		For >50 To 100, Deduct	*-3.66*	
		For >100 To 250, Deduct	*-6.04*	
		For >250 To 500, Deduct	*-9.55*	
		For >500, Deduct	*-13.05*	
26 51 19 00-0459	EA	6" Insulated Ceiling, Air-Tite New Construction Housing, No Socket Bracket (Cooper Halo EI700ATNB)	95.46	33.84
		For >50 To 100, Deduct	*-3.66*	
		For >100 To 250, Deduct	*-6.04*	
		For >250 To 500, Deduct	*-9.55*	
		For >500, Deduct	*-13.05*	
26 51 19 00-0460	EA	6" Insulated Ceiling, New Construction Housing, No Socket Bracket (Cooper Halo EI700NB)	83.43	33.84
		For >50 To 100, Deduct	*-3.35*	
		For >100 To 250, Deduct	*-5.44*	
		For >250 To 500, Deduct	*-8.34*	
		For >500, Deduct	*-11.25*	
26 51 19 00-0461	EA	6" Insulated Ceiling, Universal New Construction Housing (Cooper Halo EI700U)	83.43	33.84
		For >50 To 100, Deduct	*-3.35*	
		For >100 To 250, Deduct	*-5.44*	
		For >250 To 500, Deduct	*-8.34*	
		For >500, Deduct	*-11.25*	
26 51 19 00-0462	EA	6" Insulated Ceiling, Universal, Air-Tite, New Construction Housing (Cooper Halo EI700UAT)	83.43	33.84
		For >50 To 100, Deduct	*-3.35*	
		For >100 To 250, Deduct	*-5.44*	
		For >250 To 500, Deduct	*-8.34*	
		For >500, Deduct	*-11.25*	
26 51 19 00-0463	EA	6" Non-IC, New Construction Housing (Cooper Halo ET700)	83.43	33.84
		For >50 To 100, Deduct	*-3.35*	
		For >100 To 250, Deduct	*-5.44*	
		For >250 To 500, Deduct	*-8.34*	
		For >500, Deduct	*-11.25*	
26 51 19 00-0464	EA	6" Non-IC, Remodel Housing (Cooper Halo ET700R)	83.43	33.84
		For >50 To 100, Deduct	*-3.35*	
		For >100 To 250, Deduct	*-5.44*	
		For >250 To 500, Deduct	*-8.34*	
		For >500, Deduct	*-11.25*	
26 51 19 00-0465	EA	6" Shallow, Insulated Ceiling, Air-Tite New Construction (Cooper Halo H27ICAT)	84.31	33.84
		For >50 To 100, Deduct	*-3.38*	
		For >100 To 250, Deduct	*-5.48*	
		For >250 To 500, Deduct	*-8.43*	
		For >500, Deduct	*-11.38*	
26 51 19 00-0466	EA	6" Shallow, Insulated Ceiling, Air-Tite Remodel Housing (Cooper Halo H27RICAT)	97.82	33.84
		For >50 To 100, Deduct	*-3.71*	
		For >100 To 250, Deduct	*-6.16*	
		For >250 To 500, Deduct	*-9.78*	
		For >500, Deduct	*-13.40*	
26 51 19 00-0467	EA	6" Shallow, Insulated Ceiling, New Construction Housing (Cooper Halo H27ICT)	84.31	33.84
		For >50 To 100, Deduct	*-3.38*	
		For >100 To 250, Deduct	*-5.48*	
		For >250 To 500, Deduct	*-8.43*	
		For >500, Deduct	*-11.38*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0468	EA	6" Shallow, Insulated Ceiling, Remodel Housing (Cooper Halo H27RICT)	94.00	33.84
		For >50 To 100, Deduct	*-3.62*	
		For >100 To 250, Deduct	*-5.97*	
		For >250 To 500, Deduct	*-9.40*	
		For >500, Deduct	*-12.83*	
26 51 19 00-0469	EA	6" Shallow, Non-IC, New Construction Housing (Cooper Halo H27T)	78.83	33.84
		For >50 To 100, Deduct	*-3.24*	
		For >100 To 250, Deduct	*-5.21*	
		For >250 To 500, Deduct	*-7.88*	
		For >500, Deduct	*-10.56*	
26 51 19 00-0470	EA	6" Shallow, Non-IC, Remodel Housing (Cooper Halo H27RT)	80.17	33.84
		For >50 To 100, Deduct	*-3.27*	
		For >100 To 250, Deduct	*-5.28*	
		For >250 To 500, Deduct	*-8.02*	
		For >500, Deduct	*-10.76*	
26 51 19 00-0471	EA	6" Shallow, Insulated Ceiling, Air-Tite New Construction (Cooper Halo EI2700AT)	89.61	33.84
		For >50 To 100, Deduct	*-3.51*	
		For >100 To 250, Deduct	*-5.75*	
		For >250 To 500, Deduct	*-8.96*	
		For >500, Deduct	*-12.17*	
26 51 19 00-0472	EA	6" Shallow, Insulated Ceiling, New Construction Housing (Cooper Halo EI2700)	89.61	33.84
		For >50 To 100, Deduct	*-3.51*	
		For >100 To 250, Deduct	*-5.75*	
		For >250 To 500, Deduct	*-8.96*	
		For >500, Deduct	*-12.17*	
26 51 19 00-0473	EA	6" Shallow, Insulated Ceiling, Air-Tite Remodel Housing (Cooper Halo EI2700R)	89.61	33.84
		For >50 To 100, Deduct	*-3.51*	
		For >100 To 250, Deduct	*-5.75*	
		For >250 To 500, Deduct	*-8.96*	
		For >500, Deduct	*-12.17*	
26 51 19 00-0474	EA	6" Shallow, Non-IC, New Construction Housing (Cooper Halo ET2700)	89.61	33.84
		For >50 To 100, Deduct	*-3.51*	
		For >100 To 250, Deduct	*-5.75*	
		For >250 To 500, Deduct	*-8.96*	
		For >500, Deduct	*-12.17*	
26 51 19 00-0475	EA	6" Shallow, Non-IC, Remodel Housing (Cooper Halo ET2700R)	89.61	33.84
		For >50 To 100, Deduct	*-3.51*	
		For >100 To 250, Deduct	*-5.75*	
		For >250 To 500, Deduct	*-8.96*	
		For >500, Deduct	*-12.17*	
26 51 19 00-0476	EA	6" Retrofit Enclosure, Non-IC, BX Whip (Cooper Halo ML7BXRFK)	77.23	15.79
		For >50 To 100, Deduct	*-2.52*	
		For >100 To 250, Deduct	*-4.45*	
		For >250 To 500, Deduct	*-7.72*	
		For >500, Deduct	*-10.99*	
26 51 19 00-0477	EA	6" Retrofit Enclosure, Non-IC, E26 Screw base Interface (Cooper Halo ML7E26RFK)	79.97	15.79
		For >50 To 100, Deduct	*-2.59*	
		For >100 To 250, Deduct	*-4.59*	
		For >250 To 500, Deduct	*-8.00*	
		For >500, Deduct	*-11.40*	
26 51 19 00-0478	EA	5" LED, Insulated Ceiling, Air-Tite, New Construction Housing (Cooper Halo H550ICAT)	72.86	33.84
		For >50 To 100, Deduct	*-3.09*	
		For >100 To 250, Deduct	*-4.91*	
		For >250 To 500, Deduct	*-7.29*	
		For >500, Deduct	*-9.66*	
26 51 19 00-0479	EA	5" LED, Insulated Ceiling, Air-Tite, Remodel Housing (Cooper Halo H550RICAT)	73.19	33.84
		For >50 To 100, Deduct	*-3.10*	
		For >100 To 250, Deduct	*-4.93*	
		For >250 To 500, Deduct	*-7.32*	
		For >500, Deduct	*-9.71*	
26 51 19 00-0480	EA	5" Insulated Ceiling, Air-Tite New Construction Housing (Cooper Halo H5ICAT)	67.49	33.84
		For >50 To 100, Deduct	*-2.96*	
		For >100 To 250, Deduct	*-4.64*	
		For >250 To 500, Deduct	*-6.75*	
		For >500, Deduct	*-8.85*	
26 51 19 00-0481	EA	5" Insulated Ceiling, Air-Tite Remodel Housing (Cooper Halo H5RICAT)	70.29	33.84
		For >50 To 100, Deduct	*-3.03*	
		For >100 To 250, Deduct	*-4.78*	
		For >250 To 500, Deduct	*-7.03*	
		For >500, Deduct	*-9.27*	
26 51 19 00-0482	EA	5" Non-IC, New Construction Housing (Cooper Halo H5T)	69.38	33.84
		For >50 To 100, Deduct	*-3.00*	
		For >100 To 250, Deduct	*-4.74*	
		For >250 To 500, Deduct	*-6.94*	
		For >500, Deduct	*-9.14*	
26 51 19 00-0483	EA	5" Non-IC, Remodel Housing (Cooper Halo H5RT)	70.23	33.84
		For >50 To 100, Deduct	*-3.02*	
		For >100 To 250, Deduct	*-4.78*	
		For >250 To 500, Deduct	*-7.02*	
		For >500, Deduct	*-9.27*	
26 51 19 00-0484	EA	5" Insulated Ceiling, Air-Tite New Construction Housing (Cooper Halo EI500AT)	82.24	33.84
		For >50 To 100, Deduct	*-3.33*	
		For >100 To 250, Deduct	*-5.38*	
		For >250 To 500, Deduct	*-8.22*	
		For >500, Deduct	*-11.07*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0485	EA	5" Insulated Ceiling, Air-Tite Remodel Housing (Cooper Halo EI500RAT)	82.88	33.84
		For >50 To 100, Deduct	*-3.34*	
		For >100 To 250, Deduct	*-5.41*	
		For >250 To 500, Deduct	*-8.29*	
		For >500, Deduct	*-11.16*	
26 51 19 00-0486	EA	5" Non-IC, New Construction Housing (Cooper Halo ET500)	86.11	33.84
		For >50 To 100, Deduct	*-3.42*	
		For >100 To 250, Deduct	*-5.57*	
		For >250 To 500, Deduct	*-8.61*	
		For >500, Deduct	*-11.65*	
26 51 19 00-0487	EA	5" Non-IC, Remodel Housing (Cooper Halo ET500R)	88.37	33.84
		For >50 To 100, Deduct	*-3.48*	
		For >100 To 250, Deduct	*-5.69*	
		For >250 To 500, Deduct	*-8.84*	
		For >500, Deduct	*-11.99*	
26 51 19 00-0488	EA	5" Shallow, Insulated Ceiling, Air-Tite New Construction (Cooper Halo H25ICAT)	98.31	33.84
		For >50 To 100, Deduct	*-3.73*	
		For >100 To 250, Deduct	*-6.18*	
		For >250 To 500, Deduct	*-9.83*	
		For >500, Deduct	*-13.48*	

26 51 19 00-0489 Recessed LED Downlights (Maxlite DLR) *(26 51 19 00-0368)*

26 51 19 00-0490	EA	4" Diameter, 1,000 Lumens, Recessed LED Downlight Retrofit (MaxLite DLR410)	175.46	49.63
		For >50 To 100, Deduct	*-6.25*	
		For >100 To 250, Deduct	*-10.63*	
		For >250 To 500, Deduct	*-17.55*	
		For >500, Deduct	*-24.46*	
26 51 19 00-0491	EA	4" Diameter, 1,500 Lumens, Recessed LED Downlight Retrofit (MaxLite DLR415)	178.04	49.63
		For >50 To 100, Deduct	*-6.31*	
		For >100 To 250, Deduct	*-10.76*	
		For >250 To 500, Deduct	*-17.80*	
		For >500, Deduct	*-24.84*	
26 51 19 00-0492	EA	4" Diameter, 2,000 Lumens, Recessed LED Downlight Retrofit (MaxLite DLR420)	185.82	49.63
		For >50 To 100, Deduct	*-6.51*	
		For >100 To 250, Deduct	*-11.15*	
		For >250 To 500, Deduct	*-18.58*	
		For >500, Deduct	*-26.01*	
26 51 19 00-0493	EA	6" Diameter, 1,500 Lumens, Recessed LED Downlight Retrofit (MaxLite DLR615)	170.26	49.63
		For >50 To 100, Deduct	*-6.12*	
		For >100 To 250, Deduct	*-10.37*	
		For >250 To 500, Deduct	*-17.03*	
		For >500, Deduct	*-23.68*	
26 51 19 00-0494	EA	6" Diameter, 2,000 Lumens, Recessed LED Downlight Retrofit (MaxLite DLR620)	170.26	49.63
		For >50 To 100, Deduct	*-6.12*	
		For >100 To 250, Deduct	*-10.37*	
		For >250 To 500, Deduct	*-17.03*	
		For >500, Deduct	*-23.68*	
26 51 19 00-0495	EA	6" Diameter, 3,000 Lumens, Recessed LED Downlight Retrofit (MaxLite DLR630)	170.26	49.63
		For >50 To 100, Deduct	*-6.12*	
		For >100 To 250, Deduct	*-10.37*	
		For >250 To 500, Deduct	*-17.03*	
		For >500, Deduct	*-23.68*	
26 51 19 00-0496	EA	8" Diameter, 1,000 Lumens, Recessed LED Downlight Retrofit (MaxLite DLR810)	185.82	49.63
		For >50 To 100, Deduct	*-6.51*	
		For >100 To 250, Deduct	*-11.15*	
		For >250 To 500, Deduct	*-18.58*	
		For >500, Deduct	*-26.01*	
26 51 19 00-0497	EA	8" Diameter, 1,500 Lumens, Recessed LED Downlight Retrofit (MaxLite DLR815)	188.41	49.63
		For >50 To 100, Deduct	*-6.57*	
		For >100 To 250, Deduct	*-11.28*	
		For >250 To 500, Deduct	*-18.84*	
		For >500, Deduct	*-26.40*	
26 51 19 00-0498	EA	8" Diameter, 2,000 Lumens, Recessed LED Downlight Retrofit (MaxLite DLR820)	193.58	49.63
		For >50 To 100, Deduct	*-6.70*	
		For >100 To 250, Deduct	*-11.54*	
		For >250 To 500, Deduct	*-19.36*	
		For >500, Deduct	*-27.18*	
26 51 19 00-0499	EA	8" Diameter, 3,000 Lumens, Recessed LED Downlight Retrofit (MaxLite DLR830)	209.11	49.63
		For >50 To 100, Deduct	*-7.09*	
		For >100 To 250, Deduct	*-12.32*	
		For >250 To 500, Deduct	*-20.91*	
		For >500, Deduct	*-29.51*	
26 51 19 00-0500	EA	8" Diameter, 5,000 Lumens, Recessed LED Downlight Retrofit (MaxLite DLR850)	229.84	49.63
		For >50 To 100, Deduct	*-7.61*	
		For >100 To 250, Deduct	*-13.35*	
		For >250 To 500, Deduct	*-22.98*	
		For >500, Deduct	*-32.61*	

26 51 19 00-0501 Recessed LED Downlight Retrofits And Trim (CREE®) *(26 51 19 00-0367)*

26 51 19 00-0502 Recessed LED Downlight Retrofits (CREE®) *(26 51 19 00-0501)*

Note: Dimmable to 5%. For installation in standard recessed IC or non-IC housings. Includes removal of existing lamp from fixture. Excludes housing and disposal of hazardous lamps.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0503	EA	4" Diameter, 575 Lumens, Recessed LED Downlight Retrofit (Cree® CR4-575L)	96.57	
		For >50 To 100, Deduct	*-3.12*	
		For >100 To 250, Deduct	*-5.53*	
		For >250 To 500, Deduct	*-9.66*	
		For >500, Deduct	*-13.78*	
26 51 19 00-0504	EA	6" Diameter, 625 Lumens, Recessed LED Downlight Retrofit (Cree® CR6-625L)	85.48	
		For >50 To 100, Deduct	*-2.84*	
		For >100 To 250, Deduct	*-4.98*	
		For >250 To 500, Deduct	*-8.55*	
		For >500, Deduct	*-12.12*	
26 51 19 00-0505	EA	6" Diameter, 800 Lumens, Recessed LED Downlight Retrofit (Cree® CR6-800L)	107.66	
		For >50 To 100, Deduct	*-3.40*	
		For >100 To 250, Deduct	*-6.09*	
		For >250 To 500, Deduct	*-10.77*	
		For >500, Deduct	*-15.44*	
26 51 19 00-0506	EA	6" Diameter, 650 Lumens, Recessed LED Downlight Retrofit (Cree® LR6C-277)	120.58	
		For >50 To 100, Deduct	*-3.72*	
		For >100 To 250, Deduct	*-6.73*	
		For >250 To 500, Deduct	*-12.06*	
		For >500, Deduct	*-17.38*	
26 51 19 00-0507	EA	6" Diameter, 1,000 Lumens, Deep Recessed LED Downlight Retrofit (Cree® LR6-10L-XXX-120V-A-DR)	131.67	
		For >50 To 100, Deduct	*-4.00*	
		For >100 To 250, Deduct	*-7.29*	
		For >250 To 500, Deduct	*-13.17*	
		For >500, Deduct	*-19.05*	

26 51 19 00-0508 Recessed LED Downlight Retrofits Trim (CREE®) *(26 51 19 00-0501)*

Note: For installation in standard recessed IC or non-IC housings. Excludes housing and lamp.

26 51 19 00-0509	EA	6" Diameter, Diffuse Anodized Finish Reflector For LED Downlight Retrofits (Cree® CT6AX)	35.39	7.90
		For >50 To 100, Deduct	*-1.31*	
		For >100 To 250, Deduct	*-2.19*	
		For >250 To 500, Deduct	*-3.54*	
		For >500, Deduct	*-4.89*	
26 51 19 00-0510	EA	6" Diameter, Diffuse Anodized Finish Reflector With Painted Flange For LED Downlight Retrofits (Cree® LT6AP)	42.79	7.90
		For >50 To 100, Deduct	*-1.49*	
		For >100 To 250, Deduct	*-2.56*	
		For >250 To 500, Deduct	*-4.28*	
		For >500, Deduct	*-6.00*	
26 51 19 00-0511	EA	6" Diameter, Flat Black Finish Trim And Reflector For LED Downlight Retrofits (Cree® CT6BB)	37.24	7.90
		For >50 To 100, Deduct	*-1.35*	
		For >100 To 250, Deduct	*-2.29*	
		For >250 To 500, Deduct	*-3.72*	
		For >500, Deduct	*-5.16*	
26 51 19 00-0512	EA	6" Diameter, Deep Recess, Recessed LED Downlight Retrofit (Cree® LR6-18L-XXX-120V-A-DR)	172.13	7.90
		For >50 To 100, Deduct	*-4.73*	
		For >100 To 250, Deduct	*-9.03*	
		For >250 To 500, Deduct	*-17.21*	
		For >500, Deduct	*-25.40*	

26 51 19 00-0513 Recessed LED Downlight Fixture Housings (CREE®) *(26 51 19 00-0501)*

Note: Excludes lamp and trim.

26 51 19 00-0514	EA	6" Diameter, IC Rated, Architectural Recessed LED Downlight Fixture Housing (Cree® H6)	95.11	33.84
		For >50 To 100, Deduct	*-3.65*	
		For >100 To 250, Deduct	*-6.02*	
		For >250 To 500, Deduct	*-9.51*	
		For >500, Deduct	*-13.00*	
26 51 19 00-0515	EA	6" Diameter, IC Rated, Retrofit Recessed LED Downlight Fixture Housing (Cree® RR6)	69.23	33.84
		For >50 To 100, Deduct	*-3.00*	
		For >100 To 250, Deduct	*-4.73*	
		For >250 To 500, Deduct	*-6.92*	
		For >500, Deduct	*-9.12*	

26 51 19 00-0516 Can Retrofit Or Surface Mount, LED Downlights *(26 51 19 00-0367)*

26 51 19 00-0517	EA	6" Diameter, 15 Watt, Can Retrofit Or Surface Mount, LED Downlight (Lighting Science® GLP6)	101.81	30.91
		For >50 To 100, Deduct	*-3.70*	
		For >100 To 250, Deduct	*-6.25*	
		For >250 To 500, Deduct	*-10.18*	
		For >500, Deduct	*-14.11*	
26 51 19 00-0518	EA	4" Diameter, 7 Watt, Can Retrofit, LED Downlight (Green Creative0 1-811-D)	80.27	30.91
		For >50 To 100, Deduct	*-3.17*	
		For >100 To 250, Deduct	*-5.17*	
		For >250 To 500, Deduct	*-8.03*	
		For >500, Deduct	*-10.88*	
26 51 19 00-0519	EA	6" Diameter, 9.5 Watt, Can Retrofit, LED Downlight (Green Creative0 1-808-D)	80.27	30.91
		For >50 To 100, Deduct	*-3.17*	
		For >100 To 250, Deduct	*-5.17*	
		For >250 To 500, Deduct	*-8.03*	
		For >500, Deduct	*-10.88*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0520	EA	6" Diameter, 8.9 Watt, Can Retrofit, LED Downlight (Lithonia 6BP)	138.84	30.91
		For Recessed IC/Non-IC Rated Housing For New Construction, Add	*49.60*	
		For >50 To 100, Deduct	*-4.63*	
		For >100 To 250, Deduct	*-8.10*	
		For >250 To 500, Deduct	*-13.88*	
		For >500, Deduct	*-19.67*	
26 51 19 00-0521	EA	4" Diameter, 8 Watt, 600 Lumens, Retrofit LED Downlight (Sylvania LED/RT4/550/840)	65.84	30.91
		For >50 To 100, Deduct	*-2.81*	
		For >100 To 250, Deduct	*-4.45*	
		For >250 To 500, Deduct	*-6.58*	
		For >500, Deduct	*-8.72*	
26 51 19 00-0522	EA	5" Diameter, 10 Watt, 700 Lumens, Retrofit LED Downlight (Sylvania LED/RT5/6/625/840)	73.65	30.91
		For >50 To 100, Deduct	*-3.00*	
		For >100 To 250, Deduct	*-4.84*	
		For >250 To 500, Deduct	*-7.37*	
		For >500, Deduct	*-9.89*	
26 51 19 00-0523	EA	6" Diameter, 800 Lumens, 10 Watt, Retrofit LED Wallwash Downlight (Indy Lighting LRT6-08LM)	962.98	30.91
		For >50 To 100, Deduct	*-25.23*	
		For >100 To 250, Deduct	*-49.31*	
		For >250 To 500, Deduct	*-96.30*	
		For >500, Deduct	*-143.29*	

26 51 19 00-0524 Wall Mount LED Cylinder Downlight *(26 51 19 00-0001)*

26 51 19 00-0525	EA	9" Diameter, 2,200 Lumens, Wall Mount LED Cylinder Downlight With Semi-Specular Trim (Gotham® EVO® CLED9)	405.07	48.02
		For >50 To 100, Deduct	*-11.93*	
		For >100 To 250, Deduct	*-22.06*	
		For >250 To 500, Deduct	*-40.51*	
		For >500, Deduct	*-58.96*	

26 51 19 00-0526 Wall Sconce And Wall Wash LED Fixtures *(26 51 19 00-0001)*

26 51 19 00-0527 LED Wall Sconce Fixtures (Hudson Valley Lighting) *(26 51 19 00-0526)*

26 51 19 00-0528	EA	2-1/2" Diameter x 15-1/2" High, Polished Nickel, LED Wall Sconce (Hudson Valley Lighting SHAW 1200-PN)	546.48	45.12
		For >50 To 100, Deduct	*-15.35*	
		For >100 To 250, Deduct	*-29.02*	
		For >250 To 500, Deduct	*-54.65*	
		For >500, Deduct	*-80.28*	

26 51 19 00-0529 LED Wall Sconce Fixtures (Kichler) *(26 51 19 00-0526)*

26 51 19 00-0530	EA	6" High x 11.75" Wide x 3.5" Deep, 900 Lumens, 15 Watt, White Acrylic Diffuser, Brushed Nickel, LED Wall Sconce (Kichler 10790NILED)	299.52	45.12
		For >50 To 100, Deduct	*-9.18*	
		For >100 To 250, Deduct	*-16.67*	
		For >250 To 500, Deduct	*-29.95*	
		For >500, Deduct	*-43.24*	

26 51 19 00-0531 LED Wall Sconce Fixtures (Metalux) *(26 51 19 00-0526)*

26 51 19 00-0532	EA	9.875" High x 7.125" Wide x 3.5" Deep, 9 Watt, White Acrylic Diffuser, Brushed Nickel, LED Wall Sconce (Metalux AFX VNTS071009L30ENBN)	141.65	45.12
		For >50 To 100, Deduct	*-5.23*	
		For >100 To 250, Deduct	*-8.77*	
		For >250 To 500, Deduct	*-14.17*	
		For >500, Deduct	*-19.56*	
26 51 19 00-0533	EA	5" LED, Cape Sconce Wall Light, White (AFX CAPW050804L30ENWH)	123.44	45.12
		For >50 To 100, Deduct	*-4.78*	
		For >100 To 250, Deduct	*-7.86*	
		For >250 To 500, Deduct	*-12.34*	
		For >500, Deduct	*-16.82*	

26 51 19 00-0534 Concealed Continuous LED Fixtures *(26 51 19 00-0001)*

26 51 19 00-0535 Concealed Continuous LED Fixtures (Fraqtir™ S301) *(26 51 19 00-0534)*

26 51 19 00-0536	LF	Fixed Surface Mount, Concealed Continuous LED Fixture With Remote Driver (Fraqtir™ S301)	756.97	5.15
		For >50 To 100, Deduct	*-19.18*	
		For >100 To 250, Deduct	*-38.11*	
		For >250 To 500, Deduct	*-75.70*	
		For >500, Deduct	*-113.29*	
26 51 19 00-0537	LF	Fixed Surface Mount, Concealed Continuous LED Fixture With Remote Dimming Driver (Fraqtir™ S301)	863.29	5.15
		For >50 To 100, Deduct	*-21.84*	
		For >100 To 250, Deduct	*-43.42*	
		For >250 To 500, Deduct	*-86.33*	
		For >500, Deduct	*-129.24*	

26 51 19 00-0538 Low Bay LED Fixtures *(26 51 19 00-0001)*

26 51 19 00-0539 LED Linear Low Bay Fixtures (PlanLED) *(26 51 19 00-0538)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0540	EA	4' Length, 23 Watt, LED Linear Low Bay Fixture (PlanLED A1W4)	372.17	61.83
		For >50 To 100, Deduct	*-11.88*	
		For >100 To 250, Deduct	*-21.18*	
		For >250 To 500, Deduct	*-37.22*	
		For >500, Deduct	*-53.25*	
26 51 19 00-0541	EA	4' Length, 42 Watt, LED Linear Low Bay Fixture (PlanLED A2W4A)	511.22	61.83
		For >50 To 100, Deduct	*-15.36*	
		For >100 To 250, Deduct	*-28.14*	
		For >250 To 500, Deduct	*-51.12*	
		For >500, Deduct	*-74.11*	
26 51 19 00-0542	EA	8' Length, 84 Watt, LED Linear Low Bay Fixture (PlanLED A2W5A)	857.69	77.29
		For >50 To 100, Deduct	*-24.66*	
		For >100 To 250, Deduct	*-46.10*	
		For >250 To 500, Deduct	*-85.77*	
		For >500, Deduct	*-125.43*	

26 51 19 00-0543 LED Low Bay Fixtures (CREE®) *(26 51 19 00-0538)*

26 51 19 00-0544 LED Low Bay Fixtures (CREE® LS) *(26 51 19 00-0543)*

Note: Includes 120/277 voltage and 22 gauge steel housing assembly. Excludes sensors.

26 51 19 00-0545	EA	2,500 Lumens, 4' Length, LED Low Bay Fixture (Cree® LS4-25L-35K-10V)	286.81	61.83
		For >50 To 100, Deduct	*-9.75*	
		For >100 To 250, Deduct	*-16.92*	
		For >250 To 500, Deduct	*-28.68*	
		For >500, Deduct	*-40.45*	
26 51 19 00-0546	EA	2,500 Lumens, 4' Length, LED Low Bay Fixture (Cree® LS4-25L-50K-10V)	305.66	61.83
		For >50 To 100, Deduct	*-10.22*	
		For >100 To 250, Deduct	*-17.86*	
		For >250 To 500, Deduct	*-30.57*	
		For >500, Deduct	*-43.27*	
26 51 19 00-0547	EA	4,000 Lumens, 4' Length, LED Low Bay Fixture (Cree® LS4-40L-35K-10V)	294.66	61.83
		For >50 To 100, Deduct	*-9.94*	
		For >100 To 250, Deduct	*-17.31*	
		For >250 To 500, Deduct	*-29.47*	
		For >500, Deduct	*-41.62*	
26 51 19 00-0548	EA	4,000 Lumens, 4' Length, LED Low Bay Fixture (Cree® LS4-40L-50K-10V)	313.51	61.83
		For >50 To 100, Deduct	*-10.41*	
		For >100 To 250, Deduct	*-18.25*	
		For >250 To 500, Deduct	*-31.35*	
		For >500, Deduct	*-44.45*	
26 51 19 00-0549	EA	5,000 Lumens, 4' Length, LED Low Bay Fixture (Cree® LS4-50L-35K-10V)	327.64	61.83
		For >50 To 100, Deduct	*-10.77*	
		For >100 To 250, Deduct	*-18.96*	
		For >250 To 500, Deduct	*-32.76*	
		For >500, Deduct	*-46.57*	
26 51 19 00-0550	EA	5,000 Lumens, 4' Length, LED Low Bay Fixture (Cree® LS4-50L-50K-10V)	346.49	61.83
		For >50 To 100, Deduct	*-11.24*	
		For >100 To 250, Deduct	*-19.90*	
		For >250 To 500, Deduct	*-34.65*	
		For >500, Deduct	*-49.40*	
26 51 19 00-0551	EA	8,000 Lumens, 8' Length, LED Low Bay Fixture (Cree® LS8-80L-35K-10V)	458.63	77.29
		For >50 To 100, Deduct	*-14.69*	
		For >100 To 250, Deduct	*-26.15*	
		For >250 To 500, Deduct	*-45.86*	
		For >500, Deduct	*-65.57*	
26 51 19 00-0552	EA	8,000 Lumens, 8' Length, LED Low Bay Fixture (Cree® LS8-80L-50K-10V)	493.19	77.29
		For >50 To 100, Deduct	*-15.55*	
		For >100 To 250, Deduct	*-27.88*	
		For >250 To 500, Deduct	*-49.32*	
		For >500, Deduct	*-70.76*	
26 51 19 00-0553	EA	10,000 Lumens, 8' Length, LED Low Bay Fixture (Cree® LS8-100L-35K-10V)	565.43	77.29
		For >50 To 100, Deduct	*-17.36*	
		For >100 To 250, Deduct	*-31.49*	
		For >250 To 500, Deduct	*-56.54*	
		For >500, Deduct	*-81.59*	
26 51 19 00-0554	EA	10,000 Lumens, 8' Length, LED Low Bay Fixture (Cree® LS8-100L-50K-10V)	584.28	77.29
		For >50 To 100, Deduct	*-17.83*	
		For >100 To 250, Deduct	*-32.43*	
		For >250 To 500, Deduct	*-58.43*	
		For >500, Deduct	*-84.42*	

26 51 19 00-0555 LED Low Bay Fixtures (CREE® LN) *(26 51 19 00-0543)*

Note: Includes 120/277 voltage and aluminum housing assembly. Excludes sensors.

26 51 19 00-0556	EA	3,400 Lumens, 4' Length, LED Low Bay Fixture (Cree® LN4-34L-35K-10V)	635.48	61.83
		For >50 To 100, Deduct	*-18.46*	
		For >100 To 250, Deduct	*-34.35*	
		For >250 To 500, Deduct	*-63.55*	
		For >500, Deduct	*-92.75*	
26 51 19 00-0557	EA	3,400 Lumens, 4' Length, LED Low Bay Fixture, Smartcast Technology (Cree® LN4-34L-35K-CMA)	714.01	61.83
		For >50 To 100, Deduct	*-20.43*	
		For >100 To 250, Deduct	*-38.28*	
		For >250 To 500, Deduct	*-71.40*	
		For >500, Deduct	*-104.53*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0558		**LED Linear Low Bay Fixtures (CREE® CS)** *(26 51 19 00-0543)* Note: Includes 3,500 or 4,000K color temperature, 120/277 voltage and lightweight polymer housing assembly. Excludes sensors.		
26 51 19 00-0559	EA	4,000 Lumens, 4' Length, LED Linear Low Bay Fixture (Cree® CS14™)	620.66	61.83
		For >50 To 100, Deduct	*-18.09*	
		For >100 To 250, Deduct	*-33.61*	
		For >250 To 500, Deduct	*-62.07*	
		For >500, Deduct	*-90.52*	
26 51 19 00-0560	EA	2,200 Lumens, 4' Length, LED Low Bay Fixture, 0-10V Dimming (Cree® CS14™)	468.90	61.83
		For >50 To 100, Deduct	*-14.30*	
		For >100 To 250, Deduct	*-26.02*	
		For >250 To 500, Deduct	*-46.89*	
		For >500, Deduct	*-67.76*	
26 51 19 00-0561	EA	3,800 Lumens, 4' Length, LED Low Bay Fixture, 0-10V Dimming (Cree® CS14™)	555.76	61.83
		For >50 To 100, Deduct	*-16.47*	
		For >100 To 250, Deduct	*-30.36*	
		For >250 To 500, Deduct	*-55.58*	
		For >500, Deduct	*-80.79*	
26 51 19 00-0562	EA	4,400 Lumens, 8' Length, LED Linear Low Bay Fixture (Cree® CS18™)	673.90	77.29
		For >50 To 100, Deduct	*-20.07*	
		For >100 To 250, Deduct	*-36.92*	
		For >250 To 500, Deduct	*-67.39*	
		For >500, Deduct	*-97.86*	
26 51 19 00-0563	EA	7,500 Lumens, 8' Length, LED Linear Low Bay Fixture (Cree® CS18™)	770.22	77.29
		For >50 To 100, Deduct	*-22.48*	
		For >100 To 250, Deduct	*-41.73*	
		For >250 To 500, Deduct	*-77.02*	
		For >500, Deduct	*-112.31*	
26 51 19 00-0564	EA	8,000 Lumens, 8' Length, LED Linear Low Bay Fixture (Cree® CS18™)	975.32	77.29
		For >50 To 100, Deduct	*-27.60*	
		For >100 To 250, Deduct	*-51.99*	
		For >250 To 500, Deduct	*-97.53*	
		For >500, Deduct	*-143.08*	
26 51 19 00-0565	EA	4,000 Lumens, 4' Length, High Efficacy, LED Low Bay Fixture, Smartcast Technology (Cree® CS14-40LHE™)	582.08	61.83
		For >50 To 100, Deduct	*-17.13*	
		For >100 To 250, Deduct	*-31.68*	
		For >250 To 500, Deduct	*-58.21*	
		For >500, Deduct	*-84.74*	
26 51 19 00-0566	EA	3,800 Lumens, 4' Length, High Efficacy, LED Low Bay Fixture, Smartcast Technology (Cree® CS14-38L™)	629.65	61.83
		For >50 To 100, Deduct	*-18.32*	
		For >100 To 250, Deduct	*-34.06*	
		For >250 To 500, Deduct	*-62.97*	
		For >500, Deduct	*-91.87*	
26 51 19 00-0567	EA	8,000 Lumens, 8' Length, High Efficacy, LED Low Bay Fixture, Smartcast Technology (Cree® CS18-80LHE™)	926.67	77.29
		For >50 To 100, Deduct	*-26.39*	
		For >100 To 250, Deduct	*-49.55*	
		For >250 To 500, Deduct	*-92.67*	
		For >500, Deduct	*-135.78*	
26 51 19 00-0568	EA	7,500 Lumens, 8' Length, High Efficacy, LED Low Bay Fixture, Smartcast Technology (Cree® CS18-75L™)	728.78	77.29
		For >50 To 100, Deduct	*-21.44*	
		For >100 To 250, Deduct	*-39.66*	
		For >250 To 500, Deduct	*-72.88*	
		For >500, Deduct	*-106.10*	
26 51 19 00-0569		**Accessories For LED Low Bay Fixtures (CREE®)** *(26 51 19 00-0543)*		
26 51 19 00-0570	EA	Continuous Row Through Wiring Kit For 4' Fixtures (Cree® LS4TWK)	55.97	16.95
		For >50 To 100, Deduct	*-2.11*	
		For >100 To 250, Deduct	*-3.50*	
		For >250 To 500, Deduct	*-5.60*	
		For >500, Deduct	*-7.69*	
26 51 19 00-0571	EA	Continuous Row Through Wiring Kit For 8' Fixtures (Cree® LS8TWK)	61.52	16.95
		For >50 To 100, Deduct	*-2.24*	
		For >100 To 250, Deduct	*-3.78*	
		For >250 To 500, Deduct	*-6.15*	
		For >500, Deduct	*-8.52*	
26 51 19 00-0572	EA	Top Housing Aligner For Continuous Row Installations (Cree® LS-RJ)	46.72	16.95
		For >50 To 100, Deduct	*-1.87*	
		For >100 To 250, Deduct	*-3.04*	
		For >250 To 500, Deduct	*-4.67*	
		For >500, Deduct	*-6.30*	
26 51 19 00-0573	EA	Reflector Joint Aligner For Continuous Row Installations (Cree® LS-RFLJ)	37.49	16.95
		For >50 To 100, Deduct	*-1.64*	
		For >100 To 250, Deduct	*-2.58*	
		For >250 To 500, Deduct	*-3.75*	
		For >500, Deduct	*-4.92*	
26 51 19 00-0574	EA	Solid Reflector, Pair (Cree® LS4-SR)	120.63	16.95
		For >50 To 100, Deduct	*-3.72*	
		For >100 To 250, Deduct	*-6.74*	
		For >250 To 500, Deduct	*-12.06*	
		For >500, Deduct	*-17.39*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0575	EA	Solid Reflector, Pair (Cree® LS8-SR)	166.84	16.95
		For >50 To 100, Deduct	*-4.88*	
		For >100 To 250, Deduct	*-9.05*	
		For >250 To 500, Deduct	*-16.68*	
		For >500, Deduct	*-24.32*	
26 51 19 00-0576	EA	5" Cable Canopy With #18/2 SJT Cord, 48" (Cree® AC5-18/2-48-Q14B-JB)	61.52	16.95
		For >50 To 100, Deduct	*-2.24*	
		For >100 To 250, Deduct	*-3.78*	
		For >250 To 500, Deduct	*-6.15*	
		For >500, Deduct	*-8.52*	
26 51 19 00-0577	EA	5" Cable Canopy With #18/2 SJT Cord, 72" (Cree® AC5-18/2-72-Q14B-JB)	87.38	16.95
		For >50 To 100, Deduct	*-2.89*	
		For >100 To 250, Deduct	*-5.08*	
		For >250 To 500, Deduct	*-8.74*	
		For >500, Deduct	*-12.40*	
26 51 19 00-0578	EA	5" Cable Canopy With #18/5 SJT Cord, 48" (Cree® AC5-18/5-48-Q14B-JB)	68.90	16.95
		For >50 To 100, Deduct	*-2.43*	
		For >100 To 250, Deduct	*-4.15*	
		For >250 To 500, Deduct	*-6.89*	
		For >500, Deduct	*-9.63*	
26 51 19 00-0579	EA	5" Cable Canopy With #18/5 SJT Cord, 72" (Cree® AC5-18/5-72-Q14B-JB)	92.93	16.95
		For >50 To 100, Deduct	*-3.03*	
		For >100 To 250, Deduct	*-5.35*	
		For >250 To 500, Deduct	*-9.29*	
		For >500, Deduct	*-13.23*	
26 51 19 00-0580	EA	5" Cable Canopy With #18/5 SJT Cord, 96" (Cree® AC5-18/5-96-Q14B-JB)	98.47	16.95
		For >50 To 100, Deduct	*-3.17*	
		For >100 To 250, Deduct	*-5.63*	
		For >250 To 500, Deduct	*-9.85*	
		For >500, Deduct	*-14.06*	
26 51 19 00-0581	EA	5" Cable Canopy With #12/3 SJT Cord, 48" (Cree® AC5-12/3-48-Q14B-JB)	83.68	16.95
		For >50 To 100, Deduct	*-2.80*	
		For >100 To 250, Deduct	*-4.89*	
		For >250 To 500, Deduct	*-8.37*	
		For >500, Deduct	*-11.85*	
26 51 19 00-0582	EA	5" Cable Canopy With #12/3 SJT Cord, 72" (Cree® AC5-12/3-72-Q14B-JB)	126.18	16.95
		For >50 To 100, Deduct	*-3.86*	
		For >100 To 250, Deduct	*-7.02*	
		For >250 To 500, Deduct	*-12.62*	
		For >500, Deduct	*-18.22*	
26 51 19 00-0583	EA	Set Of End Caps, One With Power Feed, One Without (Cree® LN-EC)	65.21	16.95
		For >50 To 100, Deduct	*-2.34*	
		For >100 To 250, Deduct	*-3.97*	
		For >250 To 500, Deduct	*-6.52*	
		For >500, Deduct	*-9.08*	
26 51 19 00-0584	EA	Canopy Kit With Aircraft Cable And Opening For Power Feed (Cree® LN-CK-5-AC)	79.99	16.95
		For >50 To 100, Deduct	*-2.71*	
		For >100 To 250, Deduct	*-4.71*	
		For >250 To 500, Deduct	*-8.00*	
		For >500, Deduct	*-11.29*	
26 51 19 00-0585	EA	Canopy Kit With Aircraft Cable No Opening For Power Feed (Cree® LN-CK-0-AC)	61.52	16.95
		For >50 To 100, Deduct	*-2.24*	
		For >100 To 250, Deduct	*-3.78*	
		For >250 To 500, Deduct	*-6.15*	
		For >500, Deduct	*-8.52*	
26 51 19 00-0586	EA	Emergency 125W Inverter, Ceiling Installed (Cree® ELI-125W)	1,216.67	41.22
		For >50 To 100, Deduct	*-31.96*	
		For >100 To 250, Deduct	*-62.38*	
		For >250 To 500, Deduct	*-121.67*	
		For >500, Deduct	*-180.95*	
26 51 19 00-0587	EA	120 Volt, Emergency Relay For Use With Generator Power (Cree® EL-SR-120)	431.37	41.22
		For >50 To 100, Deduct	*-12.33*	
		For >100 To 250, Deduct	*-23.11*	
		For >250 To 500, Deduct	*-43.14*	
		For >500, Deduct	*-63.16*	

26 51 19 00-0588 LED Low Bay Fixtures (Everlast LED-MQ) *(26 51 19 00-0538)*

26 51 19 00-0589	EA	4' Length, 36 Watt, LED High Bay Fixture (Everlast EL-LED-MQ)	473.09	61.83
		For >50 To 100, Deduct	*-14.40*	
		For >100 To 250, Deduct	*-26.23*	
		For >250 To 500, Deduct	*-47.31*	
		For >500, Deduct	*-68.39*	
26 51 19 00-0590	EA	8' Length, 72 Watt, LED High Bay Fixture (Everlast EL-LED-MQ)	745.55	77.29
		For >50 To 100, Deduct	*-21.86*	
		For >100 To 250, Deduct	*-40.50*	
		For >250 To 500, Deduct	*-74.56*	
		For >500, Deduct	*-108.61*	

26 51 19 00-0591 LED Linear Low Bay Fixtures (Lithonia MSL) *(26 51 19 00-0538)*

Note: Includes 3,500K, 4,000K or 5,000K color temperature, 120/277 voltage and steel housing assembly. Excludes sensors.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0592	EA	4,000 Lumens, 4' Length, LED Linear Low Bay Fixture (Lithonia MSL)	1,016.42	61.83
		For >50 To 100, Deduct	*-27.99*	
		For >100 To 250, Deduct	*-53.40*	
		For >250 To 500, Deduct	*-101.64*	
		For >500, Deduct	*-149.89*	

26 51 19 00-0593 High Bay LED Fixtures *(26 51 19 00-0001)*

26 51 19 00-0594 LED High Bay Fixtures (Columbia Lighting LWS) *(26 51 19 00-0593)*

26 51 19 00-0595	EA	16" x 24", 7,909 Lumens, 58.8 Watt, LED Suspended High Bay/Low Bay Fixture (Columbia LWS-30-LW-W-EU)	521.63	113.36
		For >50 To 100, Deduct	*-18.71*	
		For >100 To 250, Deduct	*-31.75*	
		For >250 To 500, Deduct	*-52.16*	
		For >500, Deduct	*-72.58*	
26 51 19 00-0596	EA	16" x 24", 8,526 Lumens, 58.8 Watt, LED Suspended High Bay/Low Bay Fixture (Columbia LWS-50-LW-W-EU)	521.63	113.36
		For >50 To 100, Deduct	*-18.71*	
		For >100 To 250, Deduct	*-31.75*	
		For >250 To 500, Deduct	*-52.16*	
		For >500, Deduct	*-72.58*	
26 51 19 00-0597	EA	16" x 24", 11,812 Lumens, 82.9 Watt, LED Suspended High Bay/Low Bay Fixture (Columbia LWS-30-ML-W-EU)	592.41	113.36
		For >50 To 100, Deduct	*-20.48*	
		For >100 To 250, Deduct	*-35.29*	
		For >250 To 500, Deduct	*-59.24*	
		For >500, Deduct	*-83.19*	
26 51 19 00-0598	EA	16" x 24", 12,734 Lumens, 82.9 Watt, LED Suspended High Bay/Low Bay Fixture (Columbia LWS-50-ML-W-EU)	592.41	113.36
		For >50 To 100, Deduct	*-20.48*	
		For >100 To 250, Deduct	*-35.29*	
		For >250 To 500, Deduct	*-59.24*	
		For >500, Deduct	*-83.19*	
26 51 19 00-0599	EA	16" x 24", 14,813 Lumens, 112.5 Watt, LED Suspended High Bay/Low Bay Fixture (Columbia LWS-30-HL-W-EU)	710.38	113.36
		For >50 To 100, Deduct	*-23.43*	
		For >100 To 250, Deduct	*-41.19*	
		For >250 To 500, Deduct	*-71.04*	
		For >500, Deduct	*-100.89*	
26 51 19 00-0600	EA	16" x 24", 15,968 Lumens, 112.5 Watt, LED Suspended High Bay/Low Bay Fixture (Columbia LWS-50-HL-W-EU)	710.38	113.36
		For >50 To 100, Deduct	*-23.43*	
		For >100 To 250, Deduct	*-41.19*	
		For >250 To 500, Deduct	*-71.04*	
		For >500, Deduct	*-100.89*	
26 51 19 00-0601	EA	16" x 24", 18,714 Lumens, 137.1 Watt, LED Suspended High Bay/Low Bay Fixture (Columbia LWS-30-VL-W-EU)	757.56	113.36
		For >50 To 100, Deduct	*-24.61*	
		For >100 To 250, Deduct	*-43.55*	
		For >250 To 500, Deduct	*-75.76*	
		For >500, Deduct	*-107.97*	
26 51 19 00-0602	EA	16" x 24", 19,511 Lumens, 137.1 Watt, LED Suspended High Bay/Low Bay Fixture (Columbia LWS-50-VL-W-EU)	757.56	113.36
		For >50 To 100, Deduct	*-24.61*	
		For >100 To 250, Deduct	*-43.55*	
		For >250 To 500, Deduct	*-75.76*	
		For >500, Deduct	*-107.97*	
26 51 19 00-0603	EA	16" x 24", 22,994 Lumens, 174 Watt, LED Suspended High Bay/Low Bay Fixture (Columbia LWS-30-XL-W-EU)	792.95	113.36
		For >50 To 100, Deduct	*-25.49*	
		For >100 To 250, Deduct	*-45.32*	
		For >250 To 500, Deduct	*-79.30*	
		For >500, Deduct	*-113.27*	
26 51 19 00-0604	EA	16" x 24", 24,787 Lumens, 174 Watt, LED Suspended High Bay/Low Bay Fixture (Columbia LWS-50-XL-W-EU)	792.95	113.36
		For >50 To 100, Deduct	*-25.49*	
		For >100 To 250, Deduct	*-45.32*	
		For >250 To 500, Deduct	*-79.30*	
		For >500, Deduct	*-113.27*	

26 51 19 00-0605 LED High Bay Fixtures (Cree) *(26 51 19 00-0593)*

26 51 19 00-0606 LED High Bay Fixtures (CREE®) *(26 51 19 00-0605)*

26 51 19 00-0607	EA	18,000 Median Lumens, Universal Mount, LED High Bay Fixture (Cree® CXB-A-UV-M-40K-8-UL-10V)	759.14	113.36
		For >50 To 100, Deduct	*-24.65*	
		For >100 To 250, Deduct	*-43.62*	
		For >250 To 500, Deduct	*-75.91*	
		For >500, Deduct	*-108.20*	
26 51 19 00-0608	EA	18,000 Median Lumens, Universal Mount, LED High Bay Fixture (Cree® CXB-A-UV-M-40K-8-UL-ML)	910.37	113.36
		For >50 To 100, Deduct	*-28.43*	
		For >100 To 250, Deduct	*-51.19*	
		For >250 To 500, Deduct	*-91.04*	
		For >500, Deduct	*-130.89*	
26 51 19 00-0609	EA	18,000 Median Lumens, Universal Mount, LED High Bay Fixture (Cree® CXB-A-UV-M-40K-8-UH-10V)	836.48	113.36
		For >50 To 100, Deduct	*-26.58*	
		For >100 To 250, Deduct	*-47.49*	
		For >250 To 500, Deduct	*-83.65*	
		For >500, Deduct	*-119.80*	
26 51 19 00-0610	EA	18,000 Median Lumens, Universal Mount, LED High Bay Fixture (Cree® CXB-A-UV-M-40K-8-UH-ML)	956.58	113.36
		For >50 To 100, Deduct	*-29.58*	
		For >100 To 250, Deduct	*-53.50*	
		For >250 To 500, Deduct	*-95.66*	
		For >500, Deduct	*-137.82*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0611	EA	24,000 Median Lumens, Universal Mount, LED High Bay Fixture (Cree® CXB-A-UV-H-40K-8-UL-10V)	785.84	113.36
		For >50 To 100, Deduct	*-25.31*	
		For >100 To 250, Deduct	*-44.96*	
		For >250 To 500, Deduct	*-78.58*	
		For >500, Deduct	*-112.21*	
26 51 19 00-0612	EA	24,000 Median Lumens, Universal Mount, LED High Bay Fixture (Cree® CXB-A-UV-H-40K-8-UL-ML)	938.09	113.36
		For >50 To 100, Deduct	*-29.12*	
		For >100 To 250, Deduct	*-52.57*	
		For >250 To 500, Deduct	*-93.81*	
		For >500, Deduct	*-135.05*	
26 51 19 00-0613	EA	24,000 Median Lumens, Universal Mount, LED High Bay Fixture (Cree® CXB-A-UV-H-40K-8-UH-10V)	864.18	113.36
		For >50 To 100, Deduct	*-27.27*	
		For >100 To 250, Deduct	*-48.88*	
		For >250 To 500, Deduct	*-86.42*	
		For >500, Deduct	*-123.96*	
26 51 19 00-0614	EA	24,000 Median Lumens, Universal Mount, LED High Bay Fixture (Cree® CXB-A-UV-H-40K-8-UH-ML)	984.28	113.36
		For >50 To 100, Deduct	*-30.27*	
		For >100 To 250, Deduct	*-54.88*	
		For >250 To 500, Deduct	*-98.43*	
		For >500, Deduct	*-141.97*	

26 51 19 00-0615 Accessories For LED High Bay Fixtures (CREE®) *(26 51 19 00-0605)*

26 51 19 00-0616	EA	15 Amperes, 120 Volt, Straight Blade Plug For LED High Bay Fixtures (Cree® AP-515P)	55.97	16.95
		For >50 To 100, Deduct	*-2.11*	
		For >100 To 250, Deduct	*-3.50*	
		For >250 To 500, Deduct	*-5.60*	
		For >500, Deduct	*-7.69*	
26 51 19 00-0617	EA	15 Amperes, 120 Volt, Twist Lock Plug For LED High Bay Fixtures (Cree® AP-L515P)	55.97	16.95
		For >50 To 100, Deduct	*-2.11*	
		For >100 To 250, Deduct	*-3.50*	
		For >250 To 500, Deduct	*-5.60*	
		For >500, Deduct	*-7.69*	
26 51 19 00-0618	EA	16" Matte Spun Aluminum Reflector For LED High Bay Fixture (Cree® CXBA16N)	74.44	16.95
		For >50 To 100, Deduct	*-2.57*	
		For >100 To 250, Deduct	*-4.43*	
		For >250 To 500, Deduct	*-7.44*	
		For >500, Deduct	*-10.46*	
26 51 19 00-0619	EA	16" Clear Acrylic Reflector For LED High Bay Fixture (Cree® CXBP16)	111.40	16.95
		For >50 To 100, Deduct	*-3.49*	
		For >100 To 250, Deduct	*-6.28*	
		For >250 To 500, Deduct	*-11.14*	
		For >500, Deduct	*-16.00*	
26 51 19 00-0620	EA	16" White Acrylic Reflector For LED High Bay Fixture (Cree® CXBW16)	129.88	16.95
		For >50 To 100, Deduct	*-3.95*	
		For >100 To 250, Deduct	*-7.20*	
		For >250 To 500, Deduct	*-12.99*	
		For >500, Deduct	*-18.78*	
26 51 19 00-0621	EA	16" Clear Prismatic Conical Lens For Prismatic And Acrylic Reflectors For LED High Bay Fixtures (Cree® CL16)	74.44	16.95
		For >50 To 100, Deduct	*-2.57*	
		For >100 To 250, Deduct	*-4.43*	
		For >250 To 500, Deduct	*-7.44*	
		For >500, Deduct	*-10.46*	
26 51 19 00-0622	EA	16" Clear Prismatic Drop Lens For Prismatic And Acrylic Reflectors For LED High Bay Fixtures (Cree® DL16)	76.29	16.95
		For >50 To 100, Deduct	*-2.61*	
		For >100 To 250, Deduct	*-4.52*	
		For >250 To 500, Deduct	*-7.63*	
		For >500, Deduct	*-10.74*	
26 51 19 00-0623	EA	16" Wire Guard For Aluminum Reflector For LED High Bay Fixtures (Cree® WG-A)	55.97	16.95
		For >50 To 100, Deduct	*-2.11*	
		For >100 To 250, Deduct	*-3.50*	
		For >250 To 500, Deduct	*-5.60*	
		For >500, Deduct	*-7.69*	
26 51 19 00-0624	EA	16" Wire Guard For Prismatic And Acrylic Reflector For LED High Bay Fixtures (Cree® WG-AP)	59.66	16.95
		For >50 To 100, Deduct	*-2.20*	
		For >100 To 250, Deduct	*-3.69*	
		For >250 To 500, Deduct	*-5.97*	
		For >500, Deduct	*-8.24*	
26 51 19 00-0625	EA	5' Galvanized Safety Cable For LED High Bay Fixtures (Cree® SC-5)	39.34	16.95
		For >50 To 100, Deduct	*-1.69*	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-3.93*	
		For >500, Deduct	*-5.19*	
26 51 19 00-0626	EA	10' Galvanized Safety Cable For LED High Bay Fixtures (Cree® SC-10)	41.19	16.95
		For >50 To 100, Deduct	*-1.74*	
		For >100 To 250, Deduct	*-2.77*	
		For >250 To 500, Deduct	*-4.12*	
		For >500, Deduct	*-5.47*	

26 51 19 00-0627 LED High Bay Fixtures (DLE) *(26 51 19 00-0593)*

26 51 19 00-0628	EA	12,000 Lumens, 120 Watt, LED High Bay Fixture (DLE-12-ST/HV)	1,480.38	113.36
		For >50 To 100, Deduct	*-42.68*	
		For >100 To 250, Deduct	*-79.69*	
		For >250 To 500, Deduct	*-148.04*	
		For >500, Deduct	*-216.39*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0629	EA	18,000 Lumens, 180 Watt, LED High Bay Fixture (DLE-18-ST/HV)	1,825.75	113.36
		For >50 To 100, Deduct	*-51.31*	
		For >100 To 250, Deduct	*-96.96*	
		For >250 To 500, Deduct	*-182.58*	
		For >500, Deduct	*-268.19*	
26 51 19 00-0630	EA	24,000 Lumens, 230 Watt, LED High Bay Fixture (DLE-24-ST/HV)	2,146.46	113.36
		For >50 To 100, Deduct	*-59.33*	
		For >100 To 250, Deduct	*-112.99*	
		For >250 To 500, Deduct	*-214.65*	
		For >500, Deduct	*-316.30*	
26 51 19 00-0631		LED High Bay Fixtures (Everlast) *(26 51 19 00-0593)*		
26 51 19 00-0632		LED High Bay Fixtures (Everlast EL-LED-LG) *(26 51 19 00-0631)*		
26 51 19 00-0633	EA	13,500 Lumens, 150 Watt, LED High Bay Fixture (Everlast EL-LED-LG, AC)	989.23	113.36
		For >50 To 100, Deduct	*-30.40*	
		For >100 To 250, Deduct	*-55.13*	
		For >250 To 500, Deduct	*-98.92*	
		For >500, Deduct	*-142.72*	
26 51 19 00-0634	EA	13,500 Lumens, 150 Watt, LED High Bay Fixture (Everlast EL-LED-LG, AO)	1,047.54	113.36
		For >50 To 100, Deduct	*-31.86*	
		For >100 To 250, Deduct	*-58.04*	
		For >250 To 500, Deduct	*-104.75*	
		For >500, Deduct	*-151.46*	
26 51 19 00-0635	EA	15,000 Lumens, 150 Watt, LED High Bay Fixture (Everlast EL-LED-LG, AL16)	930.92	113.36
		For >50 To 100, Deduct	*-28.94*	
		For >100 To 250, Deduct	*-52.21*	
		For >250 To 500, Deduct	*-93.09*	
		For >500, Deduct	*-133.97*	
26 51 19 00-0636	EA	15,000 Lumens, 150 Watt, LED High Bay Fixture (Everlast EL-LED-LG, AL22)	955.59	113.36
		For >50 To 100, Deduct	*-29.56*	
		For >100 To 250, Deduct	*-53.45*	
		For >250 To 500, Deduct	*-95.56*	
		For >500, Deduct	*-137.67*	
26 51 19 00-0637	EA	17,500 Lumens, 200 Watt, LED High Bay Fixture (Everlast EL-LED-LG, AC)	1,090.15	113.36
		For >50 To 100, Deduct	*-32.92*	
		For >100 To 250, Deduct	*-60.18*	
		For >250 To 500, Deduct	*-109.02*	
		For >500, Deduct	*-157.85*	
26 51 19 00-0638	EA	17,500 Lumens, 200 Watt, LED High Bay Fixture (Everlast EL-LED-LG, AO)	1,191.07	113.36
		For >50 To 100, Deduct	*-35.44*	
		For >100 To 250, Deduct	*-65.22*	
		For >250 To 500, Deduct	*-119.11*	
		For >500, Deduct	*-172.99*	
26 51 19 00-0639	EA	20,000 Lumens, 200 Watt, LED High Bay Fixture (Everlast EL-LED-LG, AL16)	1,036.32	113.36
		For >50 To 100, Deduct	*-31.58*	
		For >100 To 250, Deduct	*-57.48*	
		For >250 To 500, Deduct	*-103.63*	
		For >500, Deduct	*-149.78*	
26 51 19 00-0640	EA	20,000 Lumens, 200 Watt, LED High Bay Fixture (Everlast EL-LED-LG, AL22)	1,123.79	113.36
		For >50 To 100, Deduct	*-33.76*	
		For >100 To 250, Deduct	*-61.86*	
		For >250 To 500, Deduct	*-112.38*	
		For >500, Deduct	*-162.90*	
26 51 19 00-0641	EA	34,000 Lumens, 300 Watt, LED High Bay Fixture (Everlast EL-LED-LG-HW, AL30)	1,650.82	113.36
		For >50 To 100, Deduct	*-46.94*	
		For >100 To 250, Deduct	*-88.21*	
		For >250 To 500, Deduct	*-165.08*	
		For >500, Deduct	*-241.96*	
26 51 19 00-0642	EA	43,000 Lumens, 400 Watt, LED High Bay Fixture (Everlast EL-LED-LG-HW, AL30)	1,807.81	113.36
		For >50 To 100, Deduct	*-50.86*	
		For >100 To 250, Deduct	*-96.06*	
		For >250 To 500, Deduct	*-180.78*	
		For >500, Deduct	*-265.50*	
26 51 19 00-0643	EA	66,000 Lumens, 600 Watt, LED High Bay Fixture (Everlast EL-LED-LG-HW, AL30)	2,256.35	113.36
		For >50 To 100, Deduct	*-62.08*	
		For >100 To 250, Deduct	*-118.49*	
		For >250 To 500, Deduct	*-225.64*	
		For >500, Deduct	*-332.78*	
26 51 19 00-0644		LED High Bay Fixtures (Everlast EL-LED-CS) *(26 51 19 00-0631)*		
26 51 19 00-0645	EA	5,000 Lumens, 50 Watt, LED High Bay Fixture (Everlast EL-LED-CS)	607.97	113.36
		For >50 To 100, Deduct	*-20.87*	
		For >100 To 250, Deduct	*-36.07*	
		For >250 To 500, Deduct	*-60.80*	
		For >500, Deduct	*-85.53*	
26 51 19 00-0646	EA	10,000 Lumens, 100 Watt, LED High Bay Fixture (Everlast EL-LED-CS)	910.73	113.36
		For >50 To 100, Deduct	*-28.44*	
		For >100 To 250, Deduct	*-51.20*	
		For >250 To 500, Deduct	*-91.07*	
		For >500, Deduct	*-130.94*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0647	EA	15,000 Lumens, 150 Watt, LED High Bay Fixture (Everlast EL-LED-CS)	1,045.29	113.36
		For >50 To 100, Deduct	*-31.80*	
		For >100 To 250, Deduct	*-57.93*	
		For >250 To 500, Deduct	*-104.53*	
		For >500, Deduct	*-151.13*	
26 51 19 00-0648	EA	20,000 Lumens, 200 Watt, LED High Bay Fixture (Everlast EL-LED-CS)	1,202.28	113.36
		For >50 To 100, Deduct	*-35.72*	
		For >100 To 250, Deduct	*-65.78*	
		For >250 To 500, Deduct	*-120.23*	
		For >500, Deduct	*-174.67*	
26 51 19 00-0649	EA	30,000 Lumens, 300 Watt, LED High Bay Fixture (Everlast EL-LED-CS)	1,303.20	113.36
		For >50 To 100, Deduct	*-38.25*	
		For >100 To 250, Deduct	*-70.83*	
		For >250 To 500, Deduct	*-130.32*	
		For >500, Deduct	*-189.81*	

26 51 19 00-0650 LED High Bay Fixtures (Everlast EL-LED-HB-LG) *(26 51 19 00-0631)*

26 51 19 00-0651	EA	10,000 Lumens, 100 Watt, LED High Bay Fixture (Everlast EL-LED-HB-LG)	809.81	113.36
		For >50 To 100, Deduct	*-25.91*	
		For >100 To 250, Deduct	*-46.16*	
		For >250 To 500, Deduct	*-80.98*	
		For >500, Deduct	*-115.80*	
26 51 19 00-0652	EA	15,000 Lumens, 150 Watt, LED High Bay Fixture (Everlast EL-LED-HB-LG)	865.88	113.36
		For >50 To 100, Deduct	*-27.31*	
		For >100 To 250, Deduct	*-48.96*	
		For >250 To 500, Deduct	*-86.59*	
		For >500, Deduct	*-124.21*	
26 51 19 00-0653	EA	20,000 Lumens, 200 Watt, LED High Bay Fixture (Everlast EL-LED-HB-LG)	944.37	113.36
		For >50 To 100, Deduct	*-29.28*	
		For >100 To 250, Deduct	*-52.89*	
		For >250 To 500, Deduct	*-94.44*	
		For >500, Deduct	*-135.99*	

26 51 19 00-0654 LED High Bay Fixtures (Everlast EL-LED-LHB) *(26 51 19 00-0631)*

26 51 19 00-0655	EA	13,000 Lumens, 100 Watt, LED High Bay Fixture (Everlast EL-LED-LHB)	823.27	113.36
		For >50 To 100, Deduct	*-26.25*	
		For >100 To 250, Deduct	*-46.83*	
		For >250 To 500, Deduct	*-82.33*	
		For >500, Deduct	*-117.82*	
26 51 19 00-0656	EA	26,000 Lumens, 200 Watt, LED High Bay Fixture (Everlast EL-LED-LHB)	1,022.87	113.36
		For >50 To 100, Deduct	*-31.24*	
		For >100 To 250, Deduct	*-56.81*	
		For >250 To 500, Deduct	*-102.29*	
		For >500, Deduct	*-147.76*	
26 51 19 00-0657	EA	39,000 Lumens, 300 Watt, LED High Bay Fixture (Everlast EL-LED-LHB)	1,280.78	113.36
		For >50 To 100, Deduct	*-37.69*	
		For >100 To 250, Deduct	*-69.71*	
		For >250 To 500, Deduct	*-128.08*	
		For >500, Deduct	*-186.45*	

26 51 19 00-0658 LED High Bay Fixtures (Lithonia IBG) *(26 51 19 00-0593)*

26 51 19 00-0659	EA	8,000 Lumens, 48 Watt, 25.6" Length, LED High Bay Fixture (Lithonia IBG 8000LM SEF ACL GND MVOLT)	446.38	111.29
		For >50 To 100, Deduct	*-15.39*	
		For >100 To 250, Deduct	*-26.55*	
		For >250 To 500, Deduct	*-44.64*	
		For >500, Deduct	*-62.72*	
26 51 19 00-0660	EA	12,000 Lumens, 76 Watt, 25.6" Length, LED High Bay Fixture (Lithonia IBG 12000LM SEF ACL GND MVOLT)	465.17	111.29
		For >50 To 100, Deduct	*-15.86*	
		For >100 To 250, Deduct	*-27.49*	
		For >250 To 500, Deduct	*-46.52*	
		For >500, Deduct	*-65.54*	
26 51 19 00-0661	EA	15,000 Lumens, 93 Watt, 25.6" Length, LED High Bay Fixture (Lithonia IBG 15000LM SEF ACL GND MVOLT)	507.45	111.29
		For >50 To 100, Deduct	*-16.92*	
		For >100 To 250, Deduct	*-29.61*	
		For >250 To 500, Deduct	*-50.75*	
		For >500, Deduct	*-71.88*	
26 51 19 00-0662	EA	18,000 Lumens, 105 Watt, 25.6" Length, LED High Bay Fixture (Lithonia IBG 18000LM SEF ACL GND MVOLT)	574.19	111.29
		For >50 To 100, Deduct	*-18.59*	
		For >100 To 250, Deduct	*-32.94*	
		For >250 To 500, Deduct	*-57.42*	
		For >500, Deduct	*-81.90*	
26 51 19 00-0663	EA	24,000 Lumens, 144 Watt, 25.6" Length, LED High Bay Fixture (Lithonia IBG 24000LM SEF ACL GND MVOLT)	628.54	111.29
		For >50 To 100, Deduct	*-19.95*	
		For >100 To 250, Deduct	*-35.66*	
		For >250 To 500, Deduct	*-62.85*	
		For >500, Deduct	*-90.05*	
26 51 19 00-0664	EA	30,000 Lumens, 178 Watt, 25.6" Length, LED High Bay Fixture (Lithonia IBG 30000LM SEF ACL GND MVOLT)	756.29	111.29
		For >50 To 100, Deduct	*-23.14*	
		For >100 To 250, Deduct	*-42.05*	
		For >250 To 500, Deduct	*-75.63*	
		For >500, Deduct	*-109.21*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0665	EA	36,000 Lumens, 218 Watt, 25.6" Length, LED High Bay Fixture (Lithonia IBG 36000LM SEF ACL GND MVOLT)	919.38	111.29
		For >50 To 100, Deduct	*-27.22*	
		For >100 To 250, Deduct	*-50.20*	
		For >250 To 500, Deduct	*-91.94*	
		For >500, Deduct	*-133.67*	
26 51 19 00-0666	EA	48,000 Lumens, 284 Watt, 47.29" Length, LED High Bay Fixture (Lithonia IBG 48000LM SEF ACL GND MVOLT)	1,328.35	113.36
		For >50 To 100, Deduct	*-38.88*	
		For >100 To 250, Deduct	*-72.09*	
		For >250 To 500, Deduct	*-132.84*	
		For >500, Deduct	*-193.58*	

26 51 19 00-0667 LED High Bay Fixtures (Lithonia IBL) *(26 51 19 00-0593)*

26 51 19 00-0668	EA	9,000 Lumens, 45" Length, LED High Bay Fixture (Lithonia IBL 9L)	672.61	113.36
		For >50 To 100, Deduct	*-22.48*	
		For >100 To 250, Deduct	*-39.30*	
		For >250 To 500, Deduct	*-67.26*	
		For >500, Deduct	*-95.22*	
26 51 19 00-0669	EA	12,000 Lumens, 45" Length, LED High Bay Fixture (Lithonia IBL 12L)	731.59	113.36
		For >50 To 100, Deduct	*-23.96*	
		For >100 To 250, Deduct	*-42.25*	
		For >250 To 500, Deduct	*-73.16*	
		For >500, Deduct	*-104.07*	
26 51 19 00-0670	EA	18,000 Lumens, 45" Length, LED High Bay Fixture (Lithonia IBL 18L)	890.85	113.36
		For >50 To 100, Deduct	*-27.94*	
		For >100 To 250, Deduct	*-50.21*	
		For >250 To 500, Deduct	*-89.09*	
		For >500, Deduct	*-127.96*	
26 51 19 00-0671	EA	24,000 Lumens, 45" Length, LED High Bay Fixture (Lithonia IBL 24L)	954.55	113.36
		For >50 To 100, Deduct	*-29.53*	
		For >100 To 250, Deduct	*-53.40*	
		For >250 To 500, Deduct	*-95.46*	
		For >500, Deduct	*-137.51*	

26 51 19 00-0672 LED High Bay Fixtures (Metalux SSLED) *(26 51 19 00-0593)*

26 51 19 00-0673	EA	12,000 Lumens, 80 Watt, 5000K, LED Round High Bay Fixture (Metalux SSLED-LD5-12-M-UNV-L840-CD1U)	749.56	113.36
		For >50 To 100, Deduct	*-24.41*	
		For >100 To 250, Deduct	*-43.15*	
		For >250 To 500, Deduct	*-74.96*	
		For >500, Deduct	*-106.77*	
26 51 19 00-0674	EA	15,000 Lumens, 100 Watt, 5000K, LED Round High Bay Fixture (Metalux SSLED-LD5-15-M-UNV-L840-CD1U)	770.10	113.36
		For >50 To 100, Deduct	*-24.92*	
		For >100 To 250, Deduct	*-44.17*	
		For >250 To 500, Deduct	*-77.01*	
		For >500, Deduct	*-109.85*	
26 51 19 00-0675	EA	18,000 Lumens, 120 Watt, 5000K, LED Round High Bay Fixture (Metalux SSLED-LD5-18-M-UNV-L840-CD1U)	778.37	113.36
		For >50 To 100, Deduct	*-25.13*	
		For >100 To 250, Deduct	*-44.59*	
		For >250 To 500, Deduct	*-77.84*	
		For >500, Deduct	*-111.09*	
26 51 19 00-0676	EA	24,000 Lumens, 160 Watt, 5000K, LED Round High Bay Fixture (Metalux SSLED-LD5-24-M-UNV-L840-CD1U)	857.13	113.36
		For >50 To 100, Deduct	*-27.10*	
		For >100 To 250, Deduct	*-48.52*	
		For >250 To 500, Deduct	*-85.71*	
		For >500, Deduct	*-122.90*	
26 51 19 00-0677	EA	30,000 Lumens, 200 Watt, 5000K, LED Round High Bay Fixture (Metalux SSLED-LD5-30-M-UNV-L840-CD1U)	948.87	113.36
		For >50 To 100, Deduct	*-29.39*	
		For >100 To 250, Deduct	*-53.11*	
		For >250 To 500, Deduct	*-94.89*	
		For >500, Deduct	*-136.66*	
26 51 19 00-0678	EA	36,000 Lumens, 240 Watt, 5000K, LED Round High Bay Fixture (Metalux SSLED-LD5-36-M-UNV-L840-CD1U)	983.29	113.36
		For >50 To 100, Deduct	*-30.25*	
		For >100 To 250, Deduct	*-54.83*	
		For >250 To 500, Deduct	*-98.33*	
		For >500, Deduct	*-141.83*	

26 51 19 00-0679 LED High Bay Fixtures (Neptun LED) *(26 51 19 00-0593)*

26 51 19 00-0680	EA	2" Diameter, 13,100 Lumens, Bi-Level Dimming, LED High Bay Fixture With Motion Sensor (Neptun LED-19150)	926.93	113.36
		For >50 To 100, Deduct	*-28.84*	
		For >100 To 250, Deduct	*-52.01*	
		For >250 To 500, Deduct	*-92.69*	
		For >500, Deduct	*-133.37*	

26 51 19 00-0681 LED High Bay Fixtures (PlanLED) *(26 51 19 00-0593)*

26 51 19 00-0682 LED High Bay Fixtures (PlanLED LUNA) *(26 51 19 00-0681)*

Note: Includes aluminum alloy chassis.

26 51 19 00-0683	EA	7,000 Lumens, LED High Bay Fixture (PlanLED LUNA LN70)	962.31	113.36
		For >50 To 100, Deduct	*-29.73*	
		For >100 To 250, Deduct	*-53.78*	
		For >250 To 500, Deduct	*-96.23*	
		For >500, Deduct	*-138.68*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0684	EA	9,800 Lumens, LED High Bay Fixture (PlanLED LUNA LN98)	1,087.90	113.36
		For >50 To 100, Deduct	*-32.87*	
		For >100 To 250, Deduct	*-60.06*	
		For >250 To 500, Deduct	*-108.79*	
		For >500, Deduct	*-157.52*	
26 51 19 00-0685	EA	13,000 Lumens, LED High Bay Fixture (PlanLED LUNA LN130)	1,269.56	113.36
		For >50 To 100, Deduct	*-37.41*	
		For >100 To 250, Deduct	*-69.15*	
		For >250 To 500, Deduct	*-126.96*	
		For >500, Deduct	*-184.77*	
26 51 19 00-0686	EA	16,000 Lumens, LED High Bay Fixture (PlanLED LUNA LN160)	1,446.74	113.36
		For >50 To 100, Deduct	*-41.84*	
		For >100 To 250, Deduct	*-78.00*	
		For >250 To 500, Deduct	*-144.67*	
		For >500, Deduct	*-211.34*	
26 51 19 00-0687		LED High Bay Fixtures (PlanLED IBL) *(26 51 19 00-0681)*		
		Note: Includes aluminum alloy chassis.		
26 51 19 00-0688	EA	13,650 Lumens, 130 Watt, 46.5" Length, LED Indirect High Bay Fixture (PlanLED IBL 130W)	1,052.02	113.36
		For 480 Volt, Add	*62.90*	
		For >50 To 100, Deduct	*-31.97*	
		For >100 To 250, Deduct	*-58.27*	
		For >250 To 500, Deduct	*-105.20*	
		For >500, Deduct	*-152.14*	
26 51 19 00-0689	EA	21,000 Lumens, 200 Watt, 46.5" Length, LED Indirect High Bay Fixture (PlanLED IBL 200W)	1,489.35	113.36
		For 480 Volt, Add	*79.70*	
		For >50 To 100, Deduct	*-42.90*	
		For >100 To 250, Deduct	*-80.14*	
		For >250 To 500, Deduct	*-148.94*	
		For >500, Deduct	*-217.73*	
26 51 19 00-0690	EA	42,000 Lumens, 400 Watt, 46.5" Length, LED Indirect High Bay Fixture (PlanLED IBL 400W)	2,693.67	113.36
		For 480 Volt, Add	*126.45*	
		For >50 To 100, Deduct	*-73.01*	
		For >100 To 250, Deduct	*-140.35*	
		For >250 To 500, Deduct	*-269.37*	
		For >500, Deduct	*-398.38*	
26 51 19 00-0691		LED High Bay Fixtures (PlanLED SEGA) *(26 51 19 00-0681)*		
		Note: Includes aluminum alloy chassis.		
26 51 19 00-0692	EA	10,400 Lumens, 80 Watt, LED High Bay Fixture (PlanLED SEGA SE080)	816.54	113.36
		For 0 To 10 Volt Dimming, Add	*96.89*	
		For >50 To 100, Deduct	*-26.08*	
		For >100 To 250, Deduct	*-46.49*	
		For >250 To 500, Deduct	*-81.65*	
		For >500, Deduct	*-116.81*	
26 51 19 00-0693	EA	13,000 Lumens, 100 Watt, LED High Bay Fixture (PlanLED SEGA SE100)	877.09	113.36
		For 0 To 10 Volt Dimming, Add	*96.89*	
		For >50 To 100, Deduct	*-27.60*	
		For >100 To 250, Deduct	*-49.52*	
		For >250 To 500, Deduct	*-87.71*	
		For >500, Deduct	*-125.90*	
26 51 19 00-0694	EA	16,900 Lumens, 130 Watt, LED High Bay Fixture (PlanLED SEGA SE130)	1,085.66	113.36
		For 0 To 10 Volt Dimming, Add	*96.89*	
		For >50 To 100, Deduct	*-32.81*	
		For >100 To 250, Deduct	*-59.95*	
		For >250 To 500, Deduct	*-108.57*	
		For >500, Deduct	*-157.18*	
26 51 19 00-0695	EA	20,800 Lumens, 160 Watt, LED High Bay Fixture (PlanLED SEGA SE160)	1,235.92	113.36
		For 0 To 10 Volt Dimming, Add	*96.89*	
		For >50 To 100, Deduct	*-36.57*	
		For >100 To 250, Deduct	*-67.46*	
		For >250 To 500, Deduct	*-123.59*	
		For >500, Deduct	*-179.72*	
26 51 19 00-0696	EA	50,000 Lumens, 400 Watt, Array, LED High Bay Fixture (PlanLED SEGA SE400)	2,343.81	113.36
		For >50 To 100, Deduct	*-64.26*	
		For >100 To 250, Deduct	*-122.86*	
		For >250 To 500, Deduct	*-234.38*	
		For >500, Deduct	*-345.90*	
26 51 19 00-0697	EA	57,040 Lumens, 500 Watt, Array, LED High Bay Fixture (PlanLED SEGA SE500)	2,541.17	113.36
		For >50 To 100, Deduct	*-69.20*	
		For >100 To 250, Deduct	*-132.73*	
		For >250 To 500, Deduct	*-254.12*	
		For >500, Deduct	*-375.51*	
26 51 19 00-0698	EA	80,000 Lumens, 640 Watt, Array, LED High Bay Fixture (PlanLED SEGA SE640)	3,899.78	113.36
		For >50 To 100, Deduct	*-103.16*	
		For >100 To 250, Deduct	*-200.66*	
		For >250 To 500, Deduct	*-389.98*	
		For >500, Deduct	*-579.30*	
26 51 19 00-0699		Linear LED Fixtures *(26 51 19 00-0001)*		
26 51 19 00-0700		Wet Location, Linear LED Fixtures (Cree WS4) *(26 51 19 00-0699)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0701	EA	4' Length, 4,700 Lumens, 50 Watt, Wet Location, Linear LED Fixture (Cree WS4)	585.25	61.83
		For >50 To 100, Deduct	*-17.21*	
		For >100 To 250, Deduct	*-31.84*	
		For >250 To 500, Deduct	*-58.53*	
		For >500, Deduct	*-85.21*	
26 51 19 00-0702	EA	4' Length, 5,000 Lumens, 51 Watt, Wet Location, Linear LED Fixture (Cree WS4)	634.77	61.83
		For >50 To 100, Deduct	*-18.45*	
		For >100 To 250, Deduct	*-34.31*	
		For >250 To 500, Deduct	*-63.48*	
		For >500, Deduct	*-92.64*	
26 51 19 00-0703	EA	4' Length, 5,900 Lumens, 63 Watt, Wet Location, Linear LED Fixture (Cree WS4)	663.45	61.83
		For >50 To 100, Deduct	*-19.16*	
		For >100 To 250, Deduct	*-35.75*	
		For >250 To 500, Deduct	*-66.35*	
		For >500, Deduct	*-96.94*	
26 51 19 00-0704	EA	4' Length, 6,300 Lumens, 64 Watt, Wet Location, Linear LED Fixture (Cree WS4)	663.45	61.83
		For >50 To 100, Deduct	*-19.16*	
		For >100 To 250, Deduct	*-35.75*	
		For >250 To 500, Deduct	*-66.35*	
		For >500, Deduct	*-96.94*	

26 51 19 00-0705 Wall Washers LED Fixtures *(26 51 19 00-0001)*

26 51 19 00-0706 LED Wall Washers (GE Lumination™ LW Series) *(26 51 19 00-0705)*

26 51 19 00-0707	EA	4' Length, 5 Watt, 30° x 80° Lens, LED Wall Washer Light Fixture (GE Lumination™ LW Series)	670.14	61.83
		For >50 To 100, Deduct	*-19.33*	
		For >100 To 250, Deduct	*-36.08*	
		For >250 To 500, Deduct	*-67.01*	
		For >500, Deduct	*-97.94*	
26 51 19 00-0708	EA	4' Length, 8 Watt, 30° x 80° Lens, LED Wall Washer Light Fixture (GE Lumination™ LW Series)	857.81	61.83
		For >50 To 100, Deduct	*-24.02*	
		For >100 To 250, Deduct	*-45.47*	
		For >250 To 500, Deduct	*-85.78*	
		For >500, Deduct	*-126.10*	
26 51 19 00-0709	EA	8' Length, 5 Watt, 30° x 80° Lens, LED Wall Washer Light Fixture (GE Lumination™ LW Series)	1,262.99	77.29
		For >50 To 100, Deduct	*-34.80*	
		For >100 To 250, Deduct	*-66.37*	
		For >250 To 500, Deduct	*-126.30*	
		For >500, Deduct	*-186.23*	
26 51 19 00-0710	EA	8' Length, 8 Watt, 30° x 80° Lens, LED Wall Washer Light Fixture (GE Lumination™ LW Series)	1,638.32	77.29
		For >50 To 100, Deduct	*-44.18*	
		For >100 To 250, Deduct	*-85.14*	
		For >250 To 500, Deduct	*-163.83*	
		For >500, Deduct	*-242.53*	
26 51 19 00-0711	EA	120" Leader Cable (GE LLWB-LC2-120)	151.32	5.64
		For >50 To 100, Deduct	*-4.35*	
		For >100 To 250, Deduct	*-8.13*	
		For >250 To 500, Deduct	*-15.13*	
		For >500, Deduct	*-22.13*	
26 51 19 00-0712	EA	48" Jumper Cable (GE LLWB-JC2-48)	153.93	5.64
		For >50 To 100, Deduct	*-4.41*	
		For >100 To 250, Deduct	*-8.26*	
		For >250 To 500, Deduct	*-15.39*	
		For >500, Deduct	*-22.53*	
26 51 19 00-0713	EA	10 Pack, 48" Mounting Track (GE LWW1-MT48/0)	94.72	31.59
		For >50 To 100, Deduct	*-3.61*	
		For >100 To 250, Deduct	*-5.98*	
		For >250 To 500, Deduct	*-9.47*	
		For >500, Deduct	*-12.97*	

26 51 19 00-0714 Wet/Hazardous Location, LED Fixtures *(26 51 19 00-0001)*

26 51 19 00-0715 Wet Location, LED Fixtures *(26 51 19 00-0714)*

26 51 19 00-0716 Wet Location, NEMA 4X, High Bay/Low Bay, LED Fixture (Cooper Champ® Pro PVM) *(26 51 19 00-0715)*

Note: Includes 5,600K CRI LED arrays, heat and impact resistant glass lens, silicone gaskets, stainless steel external hardware and powder coated aluminum housing.

26 51 19 00-0717	EA	3,531 Lumens, 29 Watt, Pendant Mount, Wet Location, NEMA 4X, High Bay/Low Bay, LED Fixture (Cooper Champ® Pro PVM3L)	4,268.18	86.57
		For Ceiling Mount, Add	*38.60*	
		For Quick Clip Mounting Option, Add	*56.75*	
		For Frosted Lens, Add	*122.05*	
		For Warm White Color Rendering, Add	*157.11*	
		For Stanchion Mount, Add	*263.32*	
		For Wall Mount, Add	*291.47*	
		For Polycarbonate Lens, Add	*226.21*	
		For Teflon Coated Lens, Add	*259.04*	
		For 480 Volt, Add	*370.05*	
		For >50 To 100, Deduct	*-110.31*	
		For >100 To 250, Deduct	*-217.02*	
		For >250 To 500, Deduct	*-426.82*	
		For >500, Deduct	*-636.62*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0718	EA	5,335 Lumens, 43 Watt, Pendant Mount, Wet Location, NEMA 4X, High Bay/Low Bay, LED Fixture (Cooper Champ® Pro PVM5L)	4,343.71	92.74
		For Ceiling Mount, Add	*38.60*	
		For Quick Clip Mounting Option, Add	*56.75*	
		For Frosted Lens, Add	*122.05*	
		For Warm White Color Rendering, Add	*157.11*	
		For Stanchion Mount, Add	*263.32*	
		For Wall Mount, Add	*291.47*	
		For Polycarbonate Lens, Add	*226.21*	
		For Teflon Coated Lens, Add	*259.04*	
		For 480 Volt, Add	*370.05*	
		For >50 To 100, Deduct	*-112.46*	
		For >100 To 250, Deduct	*-221.05*	
		For >250 To 500, Deduct	*-434.37*	
		For >500, Deduct	*-647.69*	
26 51 19 00-0719	EA	7,195 Lumens, 62 Watt, Pendant Mount, Wet Location, NEMA 4X, High Bay/Low Bay, LED Fixture (Cooper Champ® Pro PVM7L)	4,915.61	98.93
		For Ceiling Mount, Add	*38.60*	
		For Quick Clip Mounting Option, Add	*56.75*	
		For Frosted Lens, Add	*122.05*	
		For Warm White Color Rendering, Add	*157.11*	
		For Stanchion Mount, Add	*263.32*	
		For Wall Mount, Add	*291.47*	
		For Polycarbonate Lens, Add	*226.21*	
		For Teflon Coated Lens, Add	*259.04*	
		For 480 Volt, Add	*370.05*	
		For >50 To 100, Deduct	*-127.01*	
		For >100 To 250, Deduct	*-249.90*	
		For >250 To 500, Deduct	*-491.56*	
		For >500, Deduct	*-733.22*	
26 51 19 00-0720	EA	9,266 Lumens, 85 Watt, Pendant Mount, Wet Location, NEMA 4X, High Bay/Low Bay, LED Fixture (Cooper Champ® Pro PVM9L)	5,943.05	105.12
		For Ceiling Mount, Add	*38.60*	
		For Quick Clip Mounting Option, Add	*56.75*	
		For Frosted Lens, Add	*122.05*	
		For Warm White Color Rendering, Add	*157.11*	
		For Stanchion Mount, Add	*263.32*	
		For Wall Mount, Add	*291.47*	
		For Polycarbonate Lens, Add	*226.21*	
		For Teflon Coated Lens, Add	*259.04*	
		For 480 Volt, Add	*370.05*	
		For >50 To 100, Deduct	*-152.96*	
		For >100 To 250, Deduct	*-301.53*	
		For >250 To 500, Deduct	*-594.31*	
		For >500, Deduct	*-887.08*	
26 51 19 00-0721	EA	11,440 Lumens, 113 Watt, Pendant Mount, Wet Location, NEMA 4X, High Bay/Low Bay, LED Fixture (Cooper Champ® Pro PVM11L)	7,621.20	111.29
		For Ceiling Mount, Add	*38.60*	
		For Quick Clip Mounting Option, Add	*56.75*	
		For Frosted Lens, Add	*122.05*	
		For Warm White Color Rendering, Add	*157.11*	
		For Stanchion Mount, Add	*263.32*	
		For Wall Mount, Add	*291.47*	
		For Polycarbonate Lens, Add	*226.21*	
		For Teflon Coated Lens, Add	*259.04*	
		For 480 Volt, Add	*370.05*	
		For >50 To 100, Deduct	*-195.17*	
		For >100 To 250, Deduct	*-385.70*	
		For >250 To 500, Deduct	*-762.12*	
		For >500, Deduct	*-1,138.54*	
26 51 19 00-0722	EA	13,226 Lumens, 131 Watt, Pendant Mount, Wet Location, NEMA 4X, High Bay/Low Bay, LED Fixture (Cooper Champ® Pro PVM11L)	10,085.83	114.38
		For Ceiling Mount, Add	*38.60*	
		For Quick Clip Mounting Option, Add	*56.75*	
		For Frosted Lens, Add	*122.05*	
		For Warm White Color Rendering, Add	*157.11*	
		For Stanchion Mount, Add	*263.32*	
		For Wall Mount, Add	*291.47*	
		For Polycarbonate Lens, Add	*226.21*	
		For Teflon Coated Lens, Add	*259.04*	
		For 480 Volt, Add	*370.05*	
		For >50 To 100, Deduct	*-256.91*	
		For >100 To 250, Deduct	*-509.06*	
		For >250 To 500, Deduct	*-1,008.58*	
		For >500, Deduct	*-1,508.11*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0723	EA	18,793 Lumens, 168 Watt, Pendant Mount, Wet Location, NEMA 4X, High Bay/Low Bay, LED Fixture (Cooper Champ® Pro PVM17L)	11,708.36	117.48
		For Ceiling Mount, Add	*38.60*	
		For Quick Clip Mounting Option, Add	*56.75*	
		For Frosted Lens, Add	*122.05*	
		For Warm White Color Rendering, Add	*157.11*	
		For Stanchion Mount, Add	*263.32*	
		For Wall Mount, Add	*291.47*	
		For Polycarbonate Lens, Add	*226.21*	
		For Teflon Coated Lens, Add	*259.04*	
		For 480 Volt, Add	*370.05*	
		For >50 To 100, Deduct	*-297.60*	
		For >100 To 250, Deduct	*-590.31*	
		For >250 To 500, Deduct	*-1,170.84*	
		For >500, Deduct	*-1,751.36*	

26 51 19 00-0724 Wet Location, NEMA 4X, LED Floodlight (Cooper Champ® Pro PFM) *(26 51 19 00-0715)*

Note: Includes 5,600K CRI LED arrays, shatter resistant glass lens, silicone gaskets, stainless steel external hardware and powder coated aluminum housing.

26 51 19 00-0725	EA	5,183 Lumens, 45 Watt, Yoke Mount, Wet Location, NEMA 4X, 7 x 6 Optic, Glass Lens, LED Floodlight (Cooper Champ® Pro PFM5L)	3,820.75	92.74
		For Bolt-On Visor, Add	*210.13*	
		For Bolt-On Wire Guard, Add	*432.21*	
		For 480 Volt, Add	*370.05*	
		For Warm White Color Rendering, Add	*157.11*	
		For >50 To 100, Deduct	*-99.38*	
		For >100 To 250, Deduct	*-194.90*	
		For >250 To 500, Deduct	*-382.08*	
		For >500, Deduct	*-569.25*	
26 51 19 00-0726	EA	7,095 Lumens, 62 Watt, Yoke Mount, Wet Location, NEMA 4X, 7 x 6 Optic, Glass Lens, LED Floodlight (Cooper Champ® Pro PFM7L)	5,707.99	98.93
		For Bolt-On Visor, Add	*210.13*	
		For Bolt-On Wire Guard, Add	*432.21*	
		For 480 Volt, Add	*370.05*	
		For Warm White Color Rendering, Add	*157.11*	
		For >50 To 100, Deduct	*-146.82*	
		For >100 To 250, Deduct	*-289.52*	
		For >250 To 500, Deduct	*-570.80*	
		For >500, Deduct	*-852.08*	
26 51 19 00-0727	EA	9,132 Lumens, 79 Watt, Yoke Mount, Wet Location, NEMA 4X, 7 x 6 Optic, Glass Lens, LED Floodlight (Cooper Champ® Pro PFM9L)	6,301.66	105.12
		For Bolt-On Visor, Add	*210.13*	
		For Bolt-On Wire Guard, Add	*432.21*	
		For 480 Volt, Add	*370.05*	
		For Warm White Color Rendering, Add	*157.11*	
		For >50 To 100, Deduct	*-161.92*	
		For >100 To 250, Deduct	*-319.46*	
		For >250 To 500, Deduct	*-630.17*	
		For >500, Deduct	*-940.87*	
26 51 19 00-0728	EA	11,107 Lumens, 99 Watt, Yoke Mount, Wet Location, NEMA 4X, 7 x 6 Optic, Glass Lens, LED Floodlight (Cooper Champ® Pro PFM11L)	7,252.79	111.29
		For Bolt-On Visor, Add	*210.13*	
		For Bolt-On Wire Guard, Add	*432.21*	
		For 480 Volt, Add	*370.05*	
		For Warm White Color Rendering, Add	*157.11*	
		For >50 To 100, Deduct	*-185.96*	
		For >100 To 250, Deduct	*-367.28*	
		For >250 To 500, Deduct	*-725.28*	
		For >500, Deduct	*-1,083.28*	

26 51 19 00-0729 Wet Location, NEMA 4X, Low Bay, LED Fixture (Cooper Vaporgard™ Pro P2L) *(26 51 19 00-0715)*

Note: Includes 5,600K CRI LED arrays, heat resistant glass lens, silicone gaskets, stainless steel external hardware and powder coated aluminum housing.

26 51 19 00-0730	EA	1,400 Lumens, 25 Watt, Pendant Mount, Wet Location, NEMA 4X, Low Bay, LED Fixture (Cooper Vaporgard™ Pro P2LC)	2,608.68	86.57
		For 12/24 Volt DC Driver, Add	*59.72*	
		For Frosted Lens, Add	*122.05*	
		For 55 Degree Ambient Suitability (AC Only), Add	*81.31*	
		For Warm White Color Rendering, Add	*157.11*	
		For Ceiling Mount, Add	*185.54*	
		For Wall Mount, Add	*269.09*	
		For Teflon Coated Lens, Add	*259.04*	
		For Wall Mount With Junction Box, Add	*390.90*	
		For >50 To 100, Deduct	*-68.82*	
		For >100 To 250, Deduct	*-134.04*	
		For >250 To 500, Deduct	*-260.87*	
		For >500, Deduct	*-387.70*	

26 51 19 00-0731 Vaportight, LED Fixtures *(26 51 19 00-0714)*

26 51 19 00-0732 General Distribution, Vaportight, LED Fixtures (Metalux) *(26 51 19 00-0731)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0733	EA	2', 2,000 Lumens, 16 Watt, 120-277 Volt, Dimming, General Distribution, Vaportight Industrial LED Fixture (Metalux 2VT3-LD5-2-G-UNV-L850-CD1-U)	336.35	49.47
		For >50 To 100, Deduct	*-10.47*	
		For >100 To 250, Deduct	*-18.88*	
		For >250 To 500, Deduct	*-33.64*	
		For >500, Deduct	*-48.39*	
26 51 19 00-0734	EA	2', 3,000 Lumens, 24 Watt, 120-277 Volt, Dimming, General Distribution, Vaportight Industrial LED Fixture (Metalux 2VT3-LD5-3-G-UNV-L850-CD1-U)	351.53	49.47
		For >50 To 100, Deduct	*-10.85*	
		For >100 To 250, Deduct	*-19.64*	
		For >250 To 500, Deduct	*-35.15*	
		For >500, Deduct	*-50.67*	
26 51 19 00-0735	EA	2', 4,000 Lumens, 32 Watt, 120-277 Volt, Dimming, General Distribution, Vaportight Industrial LED Fixture (Metalux 2VT3-LD5-4-G-UNV-L850-CD1-U)	381.91	49.47
		For >50 To 100, Deduct	*-11.61*	
		For >100 To 250, Deduct	*-21.16*	
		For >250 To 500, Deduct	*-38.19*	
		For >500, Deduct	*-55.23*	
26 51 19 00-0736	EA	4', 4,000 Lumens, 32 Watt, 120-277 Volt, Dimming, General Distribution, Vaportight Industrial LED Fixture (Metalux 4VT3-LD5-4-G-UNV-L850-CD1-U)	336.05	61.83
		For >50 To 100, Deduct	*-10.98*	
		For >100 To 250, Deduct	*-19.38*	
		For >250 To 500, Deduct	*-33.61*	
		For >500, Deduct	*-47.83*	
26 51 19 00-0737	EA	4', 6,000 Lumens, 51 Watt, 120-277 Volt, Dimming, General Distribution, Vaportight Industrial LED Fixture (Metalux 4VT3-LD5-6-G-UNV-L850-CD1-U)	379.61	61.83
		For >50 To 100, Deduct	*-12.07*	
		For >100 To 250, Deduct	*-21.56*	
		For >250 To 500, Deduct	*-37.96*	
		For >500, Deduct	*-54.37*	
26 51 19 00-0738	EA	4', 8,000 Lumens, 67 Watt, 120-277 Volt, Dimming, General Distribution, Vaportight Industrial LED Fixture (Metalux 4VT3-LD5-8-G-UNV-L850-CD1-U)	539.17	61.83
		For >50 To 100, Deduct	*-16.06*	
		For >100 To 250, Deduct	*-29.53*	
		For >250 To 500, Deduct	*-53.92*	
		For >500, Deduct	*-78.30*	

26 51 19 00-0739 Wide Distribution, Vaportight, LED Fixtures (Metalux) *(26 51 19 00-0731)*

26 51 19 00-0740	EA	2', 2,000 Lumens, 17 Watt, 120-277 Volt, Dimming, Wide Distribution, Vaportight Industrial LED Fixture (Metalux 2VT3-LD5-2-W-UNV-L850-CD1-U)	366.72	49.47
		For >50 To 100, Deduct	*-11.23*	
		For >100 To 250, Deduct	*-20.40*	
		For >250 To 500, Deduct	*-36.67*	
		For >500, Deduct	*-52.95*	
26 51 19 00-0741	EA	2', 3,000 Lumens, 25 Watt, 120-277 Volt, Dimming, Wide Distribution, Vaportight Industrial LED Fixture (Metalux 2VT3-LD5-3-W-UNV-L850-CD1-U)	381.91	49.47
		For >50 To 100, Deduct	*-11.61*	
		For >100 To 250, Deduct	*-21.16*	
		For >250 To 500, Deduct	*-38.19*	
		For >500, Deduct	*-55.23*	
26 51 19 00-0742	EA	2', 4,000 Lumens, 34 Watt, 120-277 Volt, Dimming, Wide Distribution, Vaportight Industrial LED Fixture (Metalux 2VT3-LD5-4-W-UNV-L850-CD1-U)	412.28	49.47
		For >50 To 100, Deduct	*-12.37*	
		For >100 To 250, Deduct	*-22.68*	
		For >250 To 500, Deduct	*-41.23*	
		For >500, Deduct	*-59.78*	
26 51 19 00-0743	EA	4', 4,000 Lumens, 31 Watt, 120-277 Volt, Dimming, Wide Distribution, Vaportight Industrial LED Fixture (Metalux 4VT3-LD5-4-W-UNV-L850-CD1-U)	478.44	61.83
		For >50 To 100, Deduct	*-14.54*	
		For >100 To 250, Deduct	*-26.50*	
		For >250 To 500, Deduct	*-47.84*	
		For >500, Deduct	*-69.19*	
26 51 19 00-0744	EA	4', 6,000 Lumens, 49 Watt, 120-277 Volt, Dimming, Wide Distribution, Vaportight Industrial LED Fixture (Metalux 4VT3-LD5-6-W-UNV-L850-CD1-U)	539.17	61.83
		For >50 To 100, Deduct	*-16.06*	
		For >100 To 250, Deduct	*-29.53*	
		For >250 To 500, Deduct	*-53.92*	
		For >500, Deduct	*-78.30*	
26 51 19 00-0745	EA	4', 8,000 Lumens, 70 Watt, 120-277 Volt, Dimming, Wide Distribution, Vaportight Industrial LED Fixture (Metalux 4VT3-LD5-8-W-UNV-L850-CD1-U)	599.92	61.83
		For >50 To 100, Deduct	*-17.57*	
		For >100 To 250, Deduct	*-32.57*	
		For >250 To 500, Deduct	*-59.99*	
		For >500, Deduct	*-87.41*	

26 51 19 00-0746 Parking Garage Distribution, Vaportight, LED Fixtures (Metalux) *(26 51 19 00-0731)*

26 51 19 00-0747	EA	2', 2,000 Lumens, 17 Watt, 120-277 Volt, Dimming, Parking Garage Distribution, Vaportight Industrial LED Fixture (Metalux 2VT3-LD5-2-P-UNV-L850-CD1-U)	366.72	49.47
		For >50 To 100, Deduct	*-11.23*	
		For >100 To 250, Deduct	*-20.40*	
		For >250 To 500, Deduct	*-36.67*	
		For >500, Deduct	*-52.95*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0748	EA	2', 3,000 Lumens, 25 Watt, 120-277 Volt, Dimming, Parking Garage Distribution, Vaportight Industrial LED Fixture (Metalux 2VT3-LD5-3-P-UNV-L850-CD1-U)	383.07	49.47
		For >50 To 100, Deduct	*-11.64*	
		For >100 To 250, Deduct	*-21.21*	
		For >250 To 500, Deduct	*-38.31*	
		For >500, Deduct	*-55.40*	
26 51 19 00-0749	EA	2', 4,000 Lumens, 34 Watt, 120-277 Volt, Dimming, Parking Garage Distribution, Vaportight Industrial LED Fixture (Metalux 2VT3-LD5-4-P-UNV-L850-CD1-U)	412.28	49.47
		For >50 To 100, Deduct	*-12.37*	
		For >100 To 250, Deduct	*-22.68*	
		For >250 To 500, Deduct	*-41.23*	
		For >500, Deduct	*-59.78*	
26 51 19 00-0750	EA	4', 4,000 Lumens, 31 Watt, 120-277 Volt, Dimming, Parking Garage Distribution, Vaportight Industrial LED Fixture (Metalux 4VT3-LD5-4-P-UNV-L850-CD1-U)	478.44	61.83
		For >50 To 100, Deduct	*-14.54*	
		For >100 To 250, Deduct	*-26.50*	
		For >250 To 500, Deduct	*-47.84*	
		For >500, Deduct	*-69.19*	
26 51 19 00-0751	EA	4', 6,000 Lumens, 49 Watt, 120-277 Volt, Dimming, Parking Garage Distribution, Vaportight Industrial LED Fixture (Metalux 4VT3-LD5-6-P-UNV-L850-CD1-U)	539.17	61.83
		For >50 To 100, Deduct	*-16.06*	
		For >100 To 250, Deduct	*-29.53*	
		For >250 To 500, Deduct	*-53.92*	
		For >500, Deduct	*-78.30*	
26 51 19 00-0752	EA	4', 8,000 Lumens, 69 Watt, 120-277 Volt, Dimming, Parking Garage Distribution, Vaportight Industrial LED Fixture (Metalux 4VT3-LD5-8-P-UNV-L850-CD1-U)	599.92	61.83
		For >50 To 100, Deduct	*-17.57*	
		For >100 To 250, Deduct	*-32.57*	
		For >250 To 500, Deduct	*-59.99*	
		For >500, Deduct	*-87.41*	

26 51 19 00-0753 Ceiling Mounted LED Fixtures *(26 51 19 00-0001)*

26 51 19 00-0754 Ceiling Mounted, LED Drum Fixtures (Enertron) *(26 51 19 00-0753)*

26 51 19 00-0755	EA	11" Diameter, 530 Lumens, 7 Watt, 3000K CCT, LED Drum Fixture (Enertron 10LED1X611-30)	125.10	41.22
		For >50 To 100, Deduct	*-4.67*	
		For >100 To 250, Deduct	*-7.80*	
		For >250 To 500, Deduct	*-12.51*	
		For >500, Deduct	*-17.22*	
26 51 19 00-0756	EA	11" Diameter, 1,060 Lumens, 10 Watt, 3000K CCT, LED Drum Fixture (Enertron 10LED2X611-30)	131.38	41.22
		For >50 To 100, Deduct	*-4.83*	
		For >100 To 250, Deduct	*-8.11*	
		For >250 To 500, Deduct	*-13.14*	
		For >500, Deduct	*-18.16*	
26 51 19 00-0757	EA	11" Diameter, 1,590 Lumens, 14 Watt, 3000K CCT, LED Drum Fixture (Enertron 10LED3X611-30)	137.67	41.22
		For >50 To 100, Deduct	*-4.99*	
		For >100 To 250, Deduct	*-8.43*	
		For >250 To 500, Deduct	*-13.77*	
		For >500, Deduct	*-19.10*	
26 51 19 00-0758	EA	11" Diameter, 2,120 Lumens, 17 Watt, 3000K CCT, LED Drum Fixture (Enertron 10LED4X611-30)	143.95	41.22
		For >50 To 100, Deduct	*-5.14*	
		For >100 To 250, Deduct	*-8.74*	
		For >250 To 500, Deduct	*-14.40*	
		For >500, Deduct	*-20.05*	
26 51 19 00-0759	EA	14" Diameter, 530 Lumens, 7 Watt, 3000K CCT, LED Drum Fixture (Enertron 10LED1X614-30)	137.80	45.34
		For >50 To 100, Deduct	*-5.15*	
		For >100 To 250, Deduct	*-8.59*	
		For >250 To 500, Deduct	*-13.78*	
		For >500, Deduct	*-18.97*	
26 51 19 00-0760	EA	14" Diameter, 1,060 Lumens, 10 Watt, 3000K CCT, LED Drum Fixture (Enertron 10LED2X614-30)	144.08	45.34
		For >50 To 100, Deduct	*-5.30*	
		For >100 To 250, Deduct	*-8.90*	
		For >250 To 500, Deduct	*-14.41*	
		For >500, Deduct	*-19.91*	
26 51 19 00-0761	EA	14" Diameter, 1,590 Lumens, 14 Watt, 3000K CCT, LED Drum Fixture (Enertron 10LED3X614-30)	150.36	45.34
		For >50 To 100, Deduct	*-5.46*	
		For >100 To 250, Deduct	*-9.22*	
		For >250 To 500, Deduct	*-15.04*	
		For >500, Deduct	*-20.85*	
26 51 19 00-0762	EA	14" Diameter, 2,120 Lumens, 17 Watt, 3000K CCT, LED Drum Fixture (Enertron 10LED4X614-30)	156.64	45.34
		For >50 To 100, Deduct	*-5.62*	
		For >100 To 250, Deduct	*-9.53*	
		For >250 To 500, Deduct	*-15.66*	
		For >500, Deduct	*-21.80*	
26 51 19 00-0763	EA	14" Diameter, 3,180 Lumens, 24 Watt, 3000K CCT, LED Drum Fixture (Enertron 10LED6X614-30)	169.21	45.34
		For >50 To 100, Deduct	*-5.93*	
		For >100 To 250, Deduct	*-10.16*	
		For >250 To 500, Deduct	*-16.92*	
		For >500, Deduct	*-23.68*	
26 51 19 00-0764	EA	11" Diameter, 530 Lumens, 7 Watt, 3500K CCT, LED Drum Fixture (Enertron 10LED1X611-35)	125.10	41.22
		For >50 To 100, Deduct	*-4.67*	
		For >100 To 250, Deduct	*-7.80*	
		For >250 To 500, Deduct	*-12.51*	
		For >500, Deduct	*-17.22*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0765	EA	11" Diameter, 1,060 Lumens, 10 Watt, 3500K CCT, LED Drum Fixture (Enertron 10LED2X611-35)	131.38	41.22
		For >50 To 100, Deduct	*-4.83*	
		For >100 To 250, Deduct	*-8.11*	
		For >250 To 500, Deduct	*-13.14*	
		For >500, Deduct	*-18.16*	
26 51 19 00-0766	EA	11" Diameter, 1,590 Lumens, 14 Watt, 3500K CCT, LED Drum Fixture (Enertron 10LED3X611-35)	137.66	41.22
		For >50 To 100, Deduct	*-4.99*	
		For >100 To 250, Deduct	*-8.43*	
		For >250 To 500, Deduct	*-13.77*	
		For >500, Deduct	*-19.10*	
26 51 19 00-0767	EA	11" Diameter, 2,120 Lumens, 17 Watt, 3500K CCT, LED Drum Fixture (Enertron 10LED4X611-35)	143.94	41.22
		For >50 To 100, Deduct	*-5.14*	
		For >100 To 250, Deduct	*-8.74*	
		For >250 To 500, Deduct	*-14.39*	
		For >500, Deduct	*-20.05*	
26 51 19 00-0768	EA	14" Diameter, 530 Lumens, 7 Watt, 3500K CCT, LED Drum Fixture (Enertron 10LED1X614-35)	137.80	45.34
		For >50 To 100, Deduct	*-5.15*	
		For >100 To 250, Deduct	*-8.59*	
		For >250 To 500, Deduct	*-13.78*	
		For >500, Deduct	*-18.97*	
26 51 19 00-0769	EA	14" Diameter, 1,060 Lumens, 10 Watt, 3500K CCT, LED Drum Fixture (Enertron 10LED2X614-35)	144.08	45.34
		For >50 To 100, Deduct	*-5.30*	
		For >100 To 250, Deduct	*-8.90*	
		For >250 To 500, Deduct	*-14.41*	
		For >500, Deduct	*-19.91*	
26 51 19 00-0770	EA	14" Diameter, 1,590 Lumens, 14 Watt, 3500K CCT, LED Drum Fixture (Enertron 10LED3X614-35)	150.36	45.34
		For >50 To 100, Deduct	*-5.46*	
		For >100 To 250, Deduct	*-9.22*	
		For >250 To 500, Deduct	*-15.04*	
		For >500, Deduct	*-20.85*	
26 51 19 00-0771	EA	14" Diameter, 2,120 Lumens, 17 Watt, 3500K CCT, LED Drum Fixture (Enertron 10LED4X614-35)	156.64	45.34
		For >50 To 100, Deduct	*-5.62*	
		For >100 To 250, Deduct	*-9.53*	
		For >250 To 500, Deduct	*-15.66*	
		For >500, Deduct	*-21.80*	
26 51 19 00-0772	EA	14" Diameter, 3,180 Lumens, 24 Watt, 3500K CCT, LED Drum Fixture (Enertron 10LED6X614-30)	169.21	45.34
		For >50 To 100, Deduct	*-5.93*	
		For >100 To 250, Deduct	*-10.16*	
		For >250 To 500, Deduct	*-16.92*	
		For >500, Deduct	*-23.68*	
26 51 19 00-0773	EA	11" Diameter, 550 Lumens, 7 Watt, 4000K CCT, LED Drum Fixture (Enertron 10LED1X611-40)	125.10	41.22
		For >50 To 100, Deduct	*-4.67*	
		For >100 To 250, Deduct	*-7.80*	
		For >250 To 500, Deduct	*-12.51*	
		For >500, Deduct	*-17.22*	
26 51 19 00-0774	EA	11" Diameter, 1,100 Lumens, 10 Watt, 4000K CCT, LED Drum Fixture (Enertron 10LED2X611-40)	131.38	41.22
		For >50 To 100, Deduct	*-4.83*	
		For >100 To 250, Deduct	*-8.11*	
		For >250 To 500, Deduct	*-13.14*	
		For >500, Deduct	*-18.16*	
26 51 19 00-0775	EA	11" Diameter, 1,650 Lumens, 14 Watt, 4000K CCT, LED Drum Fixture (Enertron 10LED3X611-40)	137.66	41.22
		For >50 To 100, Deduct	*-4.99*	
		For >100 To 250, Deduct	*-8.43*	
		For >250 To 500, Deduct	*-13.77*	
		For >500, Deduct	*-19.10*	
26 51 19 00-0776	EA	11" Diameter, 2,200 Lumens, 17 Watt, 4000K CCT, LED Drum Fixture (Enertron 10LED4X611-40)	143.94	41.22
		For >50 To 100, Deduct	*-5.14*	
		For >100 To 250, Deduct	*-8.74*	
		For >250 To 500, Deduct	*-14.39*	
		For >500, Deduct	*-20.05*	
26 51 19 00-0777	EA	14" Diameter, 550 Lumens, 7 Watt, 4000K CCT, LED Drum Fixture (Enertron 10LED1X614-40)	137.80	45.34
		For >50 To 100, Deduct	*-5.15*	
		For >100 To 250, Deduct	*-8.59*	
		For >250 To 500, Deduct	*-13.78*	
		For >500, Deduct	*-18.97*	
26 51 19 00-0778	EA	14" Diameter, 1,100 Lumens, 10 Watt, 4000K CCT, LED Drum Fixture (Enertron 10LED2X614-40)	144.08	45.34
		For >50 To 100, Deduct	*-5.30*	
		For >100 To 250, Deduct	*-8.90*	
		For >250 To 500, Deduct	*-14.41*	
		For >500, Deduct	*-19.91*	
26 51 19 00-0779	EA	14" Diameter, 1,650 Lumens, 14 Watt, 4000K CCT, LED Drum Fixture (Enertron 10LED3X614-40)	150.36	45.34
		For >50 To 100, Deduct	*-5.46*	
		For >100 To 250, Deduct	*-9.22*	
		For >250 To 500, Deduct	*-15.04*	
		For >500, Deduct	*-20.85*	
26 51 19 00-0780	EA	14" Diameter, 2,200 Lumens, 17 Watt, 4000K CCT, LED Drum Fixture (Enertron 10LED4X614-40)	156.64	45.34
		For >50 To 100, Deduct	*-5.62*	
		For >100 To 250, Deduct	*-9.53*	
		For >250 To 500, Deduct	*-15.66*	
		For >500, Deduct	*-21.80*	
26 51 19 00-0781	EA	14" Diameter, 3,300 Lumens, 24 Watt, 4000K CCT, LED Drum Fixture (Enertron 10LED6X614-40)	169.21	45.34
		For >50 To 100, Deduct	*-5.93*	
		For >100 To 250, Deduct	*-10.16*	
		For >250 To 500, Deduct	*-16.92*	
		For >500, Deduct	*-23.68*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0782	EA	11" Diameter, 560 Lumens, 7 Watt, 5000K CCT, LED Drum Fixture (Enertron 10LED1X611-50)	125.10	41.22
		For >50 To 100, Deduct	*-4.67*	
		For >100 To 250, Deduct	*-7.80*	
		For >250 To 500, Deduct	*-12.51*	
		For >500, Deduct	*-17.22*	
26 51 19 00-0783	EA	11" Diameter, 1,120 Lumens, 10 Watt, 5000K CCT, LED Drum Fixture (Enertron 10LED2X611-50)	131.38	41.22
		For >50 To 100, Deduct	*-4.83*	
		For >100 To 250, Deduct	*-8.11*	
		For >250 To 500, Deduct	*-13.14*	
		For >500, Deduct	*-18.16*	
26 51 19 00-0784	EA	11" Diameter, 1,680 Lumens, 14 Watt, 5000K CCT, LED Drum Fixture (Enertron 10LED3X611-50)	137.66	41.22
		For >50 To 100, Deduct	*-4.99*	
		For >100 To 250, Deduct	*-8.43*	
		For >250 To 500, Deduct	*-13.77*	
		For >500, Deduct	*-19.10*	
26 51 19 00-0785	EA	11" Diameter, 2,240 Lumens, 17 Watt, 5000K CCT, LED Drum Fixture (Enertron 10LED4X611-50)	143.94	41.22
		For >50 To 100, Deduct	*-5.14*	
		For >100 To 250, Deduct	*-8.74*	
		For >250 To 500, Deduct	*-14.39*	
		For >500, Deduct	*-20.05*	
26 51 19 00-0786	EA	14" Diameter, 560 Lumens, 7 Watt, 4000K CCT, LED Drum Fixture (Enertron 10LED1X614-40)	137.80	45.34
		For >50 To 100, Deduct	*-5.15*	
		For >100 To 250, Deduct	*-8.59*	
		For >250 To 500, Deduct	*-13.78*	
		For >500, Deduct	*-18.97*	
26 51 19 00-0787	EA	14" Diameter, 1,120 Lumens, 10 Watt, 4000K CCT, LED Drum Fixture (Enertron 10LED2X614-40)	144.08	45.34
		For >50 To 100, Deduct	*-5.30*	
		For >100 To 250, Deduct	*-8.90*	
		For >250 To 500, Deduct	*-14.41*	
		For >500, Deduct	*-19.91*	
26 51 19 00-0788	EA	14" Diameter, 1,680 Lumens, 14 Watt, 4000K CCT, LED Drum Fixture (Enertron 10LED3X614-40)	150.36	45.34
		For >50 To 100, Deduct	*-5.46*	
		For >100 To 250, Deduct	*-9.22*	
		For >250 To 500, Deduct	*-15.04*	
		For >500, Deduct	*-20.85*	
26 51 19 00-0789	EA	14" Diameter, 2,240 Lumens, 17 Watt, 4000K CCT, LED Drum Fixture (Enertron 10LED4X614-40)	156.64	45.34
		For >50 To 100, Deduct	*-5.62*	
		For >100 To 250, Deduct	*-9.53*	
		For >250 To 500, Deduct	*-15.66*	
		For >500, Deduct	*-21.80*	
26 51 19 00-0790	EA	14" Diameter, 3,360 Lumens, 24 Watt, 4000K CCT, LED Drum Fixture (Enertron 10LED6X614-40)	169.21	45.34
		For >50 To 100, Deduct	*-5.93*	
		For >100 To 250, Deduct	*-10.16*	
		For >250 To 500, Deduct	*-16.92*	
		For >500, Deduct	*-23.68*	
26 51 19 00-0791	EA	19" Diameter, 1,060 Lumens, 10 Watt, 3000K CCT, LED Drum Fixture (Enertron 10LED1X12S19-30)	174.18	48.95
		For >50 To 100, Deduct	*-6.21*	
		For >100 To 250, Deduct	*-10.56*	
		For >250 To 500, Deduct	*-17.42*	
		For >500, Deduct	*-24.27*	
26 51 19 00-0792	EA	19" Diameter, 2,120 Lumens, 17 Watt, 3000K CCT, LED Drum Fixture (Enertron 10LED4X619-30)	188.45	48.95
		For >50 To 100, Deduct	*-6.57*	
		For >100 To 250, Deduct	*-11.28*	
		For >250 To 500, Deduct	*-18.85*	
		For >500, Deduct	*-26.41*	
26 51 19 00-0793	EA	19" Diameter, 2,120 Lumens, 17 Watt, 3000K CCT, LED Drum Fixture (Enertron 10LED2X12S19-30)	184.97	48.95
		For >50 To 100, Deduct	*-6.48*	
		For >100 To 250, Deduct	*-11.10*	
		For >250 To 500, Deduct	*-18.50*	
		For >500, Deduct	*-25.89*	
26 51 19 00-0794	EA	19" Diameter, 1,910 Lumens, 18 Watt, 3000K CCT, LED Drum Fixture (Enertron 10LED1X12H19-30)	184.91	48.95
		For >50 To 100, Deduct	*-6.48*	
		For >100 To 250, Deduct	*-11.10*	
		For >250 To 500, Deduct	*-18.49*	
		For >500, Deduct	*-25.88*	
26 51 19 00-0795	EA	19" Diameter, 3,180 Lumens, 24 Watt, 3000K CCT, LED Drum Fixture (Enertron 10LED6X619-30)	201.02	48.95
		For >50 To 100, Deduct	*-6.88*	
		For >100 To 250, Deduct	*-11.91*	
		For >250 To 500, Deduct	*-20.10*	
		For >500, Deduct	*-28.30*	
26 51 19 00-0796	EA	19" Diameter, 3,160 Lumens, 25 Watt, 3000K CCT, LED Drum Fixture (Enertron 10LED3X12S19-30)	195.82	48.95
		For >50 To 100, Deduct	*-6.75*	
		For >100 To 250, Deduct	*-11.65*	
		For >250 To 500, Deduct	*-19.58*	
		For >500, Deduct	*-27.52*	
26 51 19 00-0797	EA	19" Diameter, 4,240 Lumens, 31 Watt, 3000K CCT, LED Drum Fixture (Enertron 10LED8X619-30)	217.58	48.95
		For >50 To 100, Deduct	*-7.29*	
		For >100 To 250, Deduct	*-12.73*	
		For >250 To 500, Deduct	*-21.76*	
		For >500, Deduct	*-30.78*	
26 51 19 00-0798	EA	19" Diameter, 3,820 Lumens, 32 Watt, 3000K CCT, LED Drum Fixture (Enertron 10LED2X12H19-30)	210.50	48.95
		For >50 To 100, Deduct	*-7.12*	
		For >100 To 250, Deduct	*-12.38*	
		For >250 To 500, Deduct	*-21.05*	
		For >500, Deduct	*-29.72*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0799	EA	19" Diameter, 4,240 Lumens, 32 Watt, 3000K CCT, LED Drum Fixture (Enertron 10LED4X12S19-30)	210.55	48.95
		For >50 To 100, Deduct	*-7.12*	
		For >100 To 250, Deduct	*-12.38*	
		For >250 To 500, Deduct	*-21.06*	
		For >500, Deduct	*-29.73*	
26 51 19 00-0800	EA	19" Diameter, 1,060 Lumens, 10 Watt, 3500K CCT, LED Drum Fixture (Enertron 10LED1X12S19-35)	174.18	48.95
		For >50 To 100, Deduct	*-6.21*	
		For >100 To 250, Deduct	*-10.56*	
		For >250 To 500, Deduct	*-17.42*	
		For >500, Deduct	*-24.27*	
26 51 19 00-0801	EA	19" Diameter, 2,120 Lumens, 17 Watt, 3500K CCT, LED Drum Fixture (Enertron 10LED4X619-35)	188.45	48.95
		For >50 To 100, Deduct	*-6.57*	
		For >100 To 250, Deduct	*-11.28*	
		For >250 To 500, Deduct	*-18.85*	
		For >500, Deduct	*-26.41*	
26 51 19 00-0802	EA	19" Diameter, 2,120 Lumens, 17 Watt, 3500K CCT, LED Drum Fixture (Enertron 10LED2X12S19-35)	184.97	48.95
		For >50 To 100, Deduct	*-6.48*	
		For >100 To 250, Deduct	*-11.10*	
		For >250 To 500, Deduct	*-18.50*	
		For >500, Deduct	*-25.89*	
26 51 19 00-0803	EA	19" Diameter, 1,910 Lumens, 18 Watt, 3500K CCT, LED Drum Fixture (Enertron 10LED1X12H19-35)	184.91	48.95
		For >50 To 100, Deduct	*-6.48*	
		For >100 To 250, Deduct	*-11.10*	
		For >250 To 500, Deduct	*-18.49*	
		For >500, Deduct	*-25.88*	
26 51 19 00-0804	EA	19" Diameter, 3,180 Lumens, 24 Watt, 3000K CCT, LED Drum Fixture (Enertron 10LED6X619-30)	201.02	48.95
		For >50 To 100, Deduct	*-6.88*	
		For >100 To 250, Deduct	*-11.91*	
		For >250 To 500, Deduct	*-20.10*	
		For >500, Deduct	*-28.30*	
26 51 19 00-0805	EA	19" Diameter, 3,160 Lumens, 25 Watt, 3000K CCT, LED Drum Fixture (Enertron 10LED3X12S19-30)	195.82	48.95
		For >50 To 100, Deduct	*-6.75*	
		For >100 To 250, Deduct	*-11.65*	
		For >250 To 500, Deduct	*-19.58*	
		For >500, Deduct	*-27.52*	
26 51 19 00-0806	EA	19" Diameter, 4,240 Lumens, 31 Watt, 3000K CCT, LED Drum Fixture (Enertron 10LED8X619-30)	217.58	48.95
		For >50 To 100, Deduct	*-7.29*	
		For >100 To 250, Deduct	*-12.73*	
		For >250 To 500, Deduct	*-21.76*	
		For >500, Deduct	*-30.78*	
26 51 19 00-0807	EA	19" Diameter, 3,820 Lumens, 32 Watt, 3500K CCT, LED Drum Fixture (Enertron 10LED2X12H19-35)	210.50	48.95
		For >50 To 100, Deduct	*-7.12*	
		For >100 To 250, Deduct	*-12.38*	
		For >250 To 500, Deduct	*-21.05*	
		For >500, Deduct	*-29.72*	
26 51 19 00-0808	EA	19" Diameter, 4,240 Lumens, 32 Watt, 3500K CCT, LED Drum Fixture (Enertron 10LED4X12S19-35)	210.55	48.95
		For >50 To 100, Deduct	*-7.12*	
		For >100 To 250, Deduct	*-12.38*	
		For >250 To 500, Deduct	*-21.06*	
		For >500, Deduct	*-29.73*	
26 51 19 00-0809	EA	19" Diameter, 1,100 Lumens, 10 Watt, 4000K CCT, LED Drum Fixture (Enertron 10LED1X12S19-40)	174.18	48.95
		For >50 To 100, Deduct	*-6.21*	
		For >100 To 250, Deduct	*-10.56*	
		For >250 To 500, Deduct	*-17.42*	
		For >500, Deduct	*-24.27*	
26 51 19 00-0810	EA	19" Diameter, 2,120 Lumens, 17 Watt, 3500K CCT, LED Drum Fixture (Enertron 10LED2X12S19-35)	188.45	48.95
		For >50 To 100, Deduct	*-6.57*	
		For >100 To 250, Deduct	*-11.28*	
		For >250 To 500, Deduct	*-18.85*	
		For >500, Deduct	*-26.41*	
26 51 19 00-0811	EA	19" Diameter, 2,120 Lumens, 17 Watt, 3500K CCT, LED Drum Fixture (Enertron 10LED2X12S19-35)	184.97	48.95
		For >50 To 100, Deduct	*-6.48*	
		For >100 To 250, Deduct	*-11.10*	
		For >250 To 500, Deduct	*-18.50*	
		For >500, Deduct	*-25.89*	
26 51 19 00-0812	EA	19" Diameter, 2,000 Lumens, 18 Watt, 4000K CCT, LED Drum Fixture (Enertron 10LED1X12H19-40)	184.91	48.95
		For >50 To 100, Deduct	*-6.48*	
		For >100 To 250, Deduct	*-11.10*	
		For >250 To 500, Deduct	*-18.49*	
		For >500, Deduct	*-25.88*	
26 51 19 00-0813	EA	19" Diameter, 3,180 Lumens, 24 Watt, 3000K CCT, LED Drum Fixture (Enertron 10LED6X619-30)	201.02	48.95
		For >50 To 100, Deduct	*-6.88*	
		For >100 To 250, Deduct	*-11.91*	
		For >250 To 500, Deduct	*-20.10*	
		For >500, Deduct	*-28.30*	
26 51 19 00-0814	EA	19" Diameter, 3,160 Lumens, 25 Watt, 3000K CCT, LED Drum Fixture (Enertron 10LED3X12S19-30)	195.82	48.95
		For >50 To 100, Deduct	*-6.75*	
		For >100 To 250, Deduct	*-11.65*	
		For >250 To 500, Deduct	*-19.58*	
		For >500, Deduct	*-27.52*	
26 51 19 00-0815	EA	19" Diameter, 4,240 Lumens, 31 Watt, 3000K CCT, LED Drum Fixture (Enertron 10LED8X619-30)	217.58	48.95
		For >50 To 100, Deduct	*-7.29*	
		For >100 To 250, Deduct	*-12.73*	
		For >250 To 500, Deduct	*-21.76*	
		For >500, Deduct	*-30.78*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0816	EA	19" Diameter, 4,000 Lumens, 32 Watt, 4000K CCT, LED Drum Fixture (Enertron 10LED2X12H19-40)	210.50	48.95
		For >50 To 100, Deduct	*-7.12*	
		For >100 To 250, Deduct	*-12.38*	
		For >250 To 500, Deduct	*-21.05*	
		For >500, Deduct	*-29.72*	
26 51 19 00-0817	EA	19" Diameter, 4,400 Lumens, 32 Watt, 4000K CCT, LED Drum Fixture (Enertron 10LED4X12S19-40)	210.55	48.95
		For >50 To 100, Deduct	*-7.12*	
		For >100 To 250, Deduct	*-12.38*	
		For >250 To 500, Deduct	*-21.06*	
		For >500, Deduct	*-29.73*	
26 51 19 00-0818	EA	19" Diameter, 1,120 Lumens, 10 Watt, 4000K CCT, LED Drum Fixture (Enertron 10LED1X12S19-50)	174.18	48.95
		For >50 To 100, Deduct	*-6.21*	
		For >100 To 250, Deduct	*-10.56*	
		For >250 To 500, Deduct	*-17.42*	
		For >500, Deduct	*-24.27*	
26 51 19 00-0819	EA	19" Diameter, 2,120 Lumens, 17 Watt, 3500K CCT, LED Drum Fixture (Enertron 10LED2X12S19-35)	188.45	48.95
		For >50 To 100, Deduct	*-6.57*	
		For >100 To 250, Deduct	*-11.28*	
		For >250 To 500, Deduct	*-18.85*	
		For >500, Deduct	*-26.41*	
26 51 19 00-0820	EA	19" Diameter, 2,240 Lumens, 17 Watt, 4000K CCT, LED Drum Fixture (Enertron 10LED2X12S19-50)	184.97	48.95
		For >50 To 100, Deduct	*-6.48*	
		For >100 To 250, Deduct	*-11.10*	
		For >250 To 500, Deduct	*-18.50*	
		For >500, Deduct	*-25.89*	
26 51 19 00-0821	EA	19" Diameter, 2,010 Lumens, 18 Watt, 4000K CCT, LED Drum Fixture (Enertron 10LED1X12H19-50)	184.91	48.95
		For >50 To 100, Deduct	*-6.48*	
		For >100 To 250, Deduct	*-11.10*	
		For >250 To 500, Deduct	*-18.49*	
		For >500, Deduct	*-25.88*	
26 51 19 00-0822	EA	19" Diameter, 3,180 Lumens, 24 Watt, 3000K CCT, LED Drum Fixture (Enertron 10LED6X619-30)	201.02	48.95
		For >50 To 100, Deduct	*-6.88*	
		For >100 To 250, Deduct	*-11.91*	
		For >250 To 500, Deduct	*-20.10*	
		For >500, Deduct	*-28.30*	
26 51 19 00-0823	EA	19" Diameter, 3,160 Lumens, 25 Watt, 3000K CCT, LED Drum Fixture (Enertron 10LED3X12S19-30)	195.82	48.95
		For >50 To 100, Deduct	*-6.75*	
		For >100 To 250, Deduct	*-11.65*	
		For >250 To 500, Deduct	*-19.58*	
		For >500, Deduct	*-27.52*	
26 51 19 00-0824	EA	19" Diameter, 4,240 Lumens, 31 Watt, 3000K CCT, LED Drum Fixture (Enertron 10LED8X619-30)	217.58	48.95
		For >50 To 100, Deduct	*-7.29*	
		For >100 To 250, Deduct	*-12.73*	
		For >250 To 500, Deduct	*-21.76*	
		For >500, Deduct	*-30.78*	
26 51 19 00-0825	EA	19" Diameter, 4,020 Lumens, 32 Watt, 4000K CCT, LED Drum Fixture (Enertron 10LED2X12H19-50)	210.50	48.95
		For >50 To 100, Deduct	*-7.12*	
		For >100 To 250, Deduct	*-12.38*	
		For >250 To 500, Deduct	*-21.05*	
		For >500, Deduct	*-29.72*	
26 51 19 00-0826	EA	19" Diameter, 4,480 Lumens, 32 Watt, 4000K CCT, LED Drum Fixture (Enertron 10LED4X12S19-50)	210.55	48.95
		For >50 To 100, Deduct	*-7.12*	
		For >100 To 250, Deduct	*-12.38*	
		For >250 To 500, Deduct	*-21.06*	
		For >500, Deduct	*-29.73*	

26 51 19 00-0827 Ceiling Mounted, LED Mushroom Fixtures (Mobern) *(26 51 19 00-0753)*

26 51 19 00-0828	EA	14" Diameter, 800 Lumens, 12 Watt, LED Ceiling Fixture (Mobern 6814LED12MV30)	190.59	45.34
		For >50 To 100, Deduct	*-6.47*	
		For >100 To 250, Deduct	*-11.23*	
		For >250 To 500, Deduct	*-19.06*	
		For >500, Deduct	*-26.89*	

26 51 19 00-0829 Ceiling Mounted, LED Fixtures (Sylvania) *(26 51 19 00-0753)*

26 51 19 00-0830	EA	12.5" x 12.5" x 2.32" Deep, 4,200 Lumens, 35 Watt, LED Garage Light Fixture (Sylvania GARAG1/035UNVD740/G5/SV/D)	734.93	48.95
		For >50 To 100, Deduct	*-20.23*	
		For >100 To 250, Deduct	*-38.60*	
		For >250 To 500, Deduct	*-73.49*	
		For >500, Deduct	*-108.38*	
26 51 19 00-0831	EA	2' x 2', 32 Watt, 120-277 Volt, 4000K CCT, LED, Grid Mount Edge-Lit Panel With Surface Mount Kit, White (Sylvania PANELF1A/032UNVD840/22G/WH + SMKIT1A/24A/WH)	278.08	41.22
		For >50 To 100, Deduct	*-8.50*	
		For >100 To 250, Deduct	*-15.45*	
		For >250 To 500, Deduct	*-27.81*	
		For >500, Deduct	*-40.17*	
26 51 19 00-0832	EA	2' x 4', 32 Watt, 120-277 Volt, 3500K CCT, LED, Grid Mount Edge-Lit Panel With Surface Mount Kit, White (Sylvania PANELF1A/032UNVD835/24G/WH + SMKIT1A/24A/WH)	346.86	48.02
		For >50 To 100, Deduct	*-10.48*	
		For >100 To 250, Deduct	*-19.15*	
		For >250 To 500, Deduct	*-34.69*	
		For >500, Deduct	*-50.23*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0833	EA	2' x 4', 32 Watt, 120-277 Volt, 4000K CCT, LED, Grid Mount Edge-Lit Panel With Surface Mount Kit, White (Sylvania PANELF1A/032UNVD840/24G/WH + SMKIT1A/24A/WH)	351.05	48.02
		For >50 To 100, Deduct	*-10.58*	
		For >100 To 250, Deduct	*-19.36*	
		For >250 To 500, Deduct	*-35.11*	
		For >500, Deduct	*-50.85*	

26 51 19 00-0834 Refrigeration/Display LED Fixtures *(26 51 19 00-0001)*

26 51 19 00-0835 Refrigeration/Display LED Fixtures (Lithonia) *(26 51 19 00-0834)*

Note: Fixtures exclude driver.

26 51 19 00-0836	EA	5' Length, Center Mount, Refrigeration/Display, Vertical LED Fixture (Lithonia FSV5 CM)	309.41	48.02
		For >50 To 100, Deduct	*-9.54*	
		For >100 To 250, Deduct	*-17.27*	
		For >250 To 500, Deduct	*-30.94*	
		For >500, Deduct	*-44.61*	
26 51 19 00-0837	EA	5' Length, Left And Right Mount (Pair), Refrigeration/Display, Vertical LED Fixture (Lithonia FSVDRVL RLEM DLC)	396.76	85.02
		For >50 To 100, Deduct	*-13.14*	
		For >100 To 250, Deduct	*-23.06*	
		For >250 To 500, Deduct	*-39.68*	
		For >500, Deduct	*-56.29*	
26 51 19 00-0838	EA	Up To 5 Door Configuration, LED Driver For Refrigeration/Display, Vertical LED Fixtures (Lithonia FSVDRVL)	369.66	68.02
		For >50 To 100, Deduct	*-11.82*	
		For >100 To 250, Deduct	*-21.06*	
		For >250 To 500, Deduct	*-36.97*	
		For >500, Deduct	*-52.87*	

26 51 19 00-0839 Pendant Mount, LED Fixtures *(26 51 19 00-0001)*

26 51 19 00-0840 Pendant Mount, Circular Architectural LED Fixtures (Delray Lighting) *(26 51 19 00-0839)*

26 51 19 00-0841	EA	2,166 Lumens, 2' Diameter, White Finish, Pendant Mount, Circular Architectural LED Fixture (Delray Lighting UC2 W W35 S)	2,719.13	105.12
		For >50 To 100, Deduct	*-72.36*	
		For >100 To 250, Deduct	*-140.34*	
		For >250 To 500, Deduct	*-271.91*	
		For >500, Deduct	*-403.49*	
26 51 19 00-0842	EA	3,250 Lumens, 3' Diameter, White Finish, Pendant Mount, Circular Architectural LED Fixture (Delray Lighting UC3 W W35 S)	4,120.26	111.29
		For >50 To 100, Deduct	*-107.64*	
		For >100 To 250, Deduct	*-210.65*	
		For >250 To 500, Deduct	*-412.03*	
		For >500, Deduct	*-613.40*	
26 51 19 00-0843	EA	4,333 Lumens, 4' Diameter, White Finish, Pendant Mount, Circular Architectural LED Fixture (Delray Lighting UC4 W W35 S)	5,269.08	117.48
		For >50 To 100, Deduct	*-136.62*	
		For >100 To 250, Deduct	*-268.35*	
		For >250 To 500, Deduct	*-526.91*	
		For >500, Deduct	*-785.47*	
26 51 19 00-0844	EA	5,416 Lumens, 5' Diameter, White Finish, Pendant Mount, Circular Architectural LED Fixture (Delray Lighting UC5 W W35 S)	6,670.20	123.66
		For >50 To 100, Deduct	*-171.91*	
		For >100 To 250, Deduct	*-338.66*	
		For >250 To 500, Deduct	*-667.02*	
		For >500, Deduct	*-995.38*	
26 51 19 00-0845	EA	2,166 Lumens, 2' Diameter, Silver Finish, Pendant Mount, Circular Architectural LED Fixture (Delray Lighting UC2 S W35 S)	2,885.94	105.12
		For >50 To 100, Deduct	*-76.53*	
		For >100 To 250, Deduct	*-148.68*	
		For >250 To 500, Deduct	*-288.59*	
		For >500, Deduct	*-428.51*	
26 51 19 00-0846	EA	3,250 Lumens, 3' Diameter, Silver Finish, Pendant Mount, Circular Architectural LED Fixture (Delray Lighting UC3 S W35 S)	4,341.29	111.29
		For >50 To 100, Deduct	*-113.17*	
		For >100 To 250, Deduct	*-221.70*	
		For >250 To 500, Deduct	*-434.13*	
		For >500, Deduct	*-646.56*	
26 51 19 00-0847	EA	4,333 Lumens, 4' Diameter, Silver Finish, Pendant Mount, Circular Architectural LED Fixture (Delray Lighting UC4 S W35 S)	5,492.20	117.48
		For >50 To 100, Deduct	*-142.20*	
		For >100 To 250, Deduct	*-279.51*	
		For >250 To 500, Deduct	*-549.22*	
		For >500, Deduct	*-818.94*	
26 51 19 00-0848	EA	5,416 Lumens, 5' Diameter, Silver Finish, Pendant Mount, Circular Architectural LED Fixture (Delray Lighting UC5 S W35 S)	6,920.43	123.66
		For >50 To 100, Deduct	*-178.16*	
		For >100 To 250, Deduct	*-351.17*	
		For >250 To 500, Deduct	*-692.04*	
		For >500, Deduct	*-1,032.91*	

26 51 19 00-0849 Pendant Mount, LED Commercial Fixtures (DMF) *(26 51 19 00-0839)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0850	EA	3,000 Lumens, 18-1/4" Diameter, Pendant Mount, LED Commercial Fixture (DMF DP610LED)	1,047.64	61.83
		For >50 To 100, Deduct	*-28.77*	
		For >100 To 250, Deduct	*-54.96*	
		For >250 To 500, Deduct	*-104.76*	
		For >500, Deduct	*-154.57*	

26 51 19 00-0851 Pendant Mount, LED Downlight Fixtures (King Luminaire) *(26 51 19 00-0839)*

26 51 19 00-0852	EA	Up To 100 Watt, Pendant Mount, LED Downlight Fixture (King Luminaire K804)	4,050.19	61.83
		For >50 To 100, Deduct	*-103.83*	
		For >100 To 250, Deduct	*-205.09*	
		For >250 To 500, Deduct	*-405.02*	
		For >500, Deduct	*-604.95*	
26 51 19 00-0853	EA	133 Watt, Pendant Mount, LED Downlight Fixture (King Luminaire K804)	4,505.46	61.83
		For >50 To 100, Deduct	*-115.21*	
		For >100 To 250, Deduct	*-227.85*	
		For >250 To 500, Deduct	*-450.55*	
		For >500, Deduct	*-673.24*	

26 51 19 00-0854 LED Track Lighting *(26 51 19 00-0001)*

26 51 19 00-0855 Track Lighting Tracks *(26 51 19 00-0854)*

26 51 19 00-0856	LF	1 Circuit Track Lighting Track	25.98	7.45
		For >50 To 100, Deduct	*-0.90*	
		For >100 To 250, Deduct	*-1.55*	
		For >250 To 500, Deduct	*-2.60*	
		For >500, Deduct	*-3.64*	
26 51 19 00-0857	LF	2 Circuit Track Lighting Track	34.05	7.45
		For >50 To 100, Deduct	*-1.13*	
		For >100 To 250, Deduct	*-1.98*	
		For >250 To 500, Deduct	*-3.41*	
		For >500, Deduct	*-4.83*	
26 51 19 00-0858	LF	3 Circuit Track Lighting Track	40.92	7.45
		For >50 To 100, Deduct	*-1.33*	
		For >100 To 250, Deduct	*-2.36*	
		For >250 To 500, Deduct	*-4.09*	
		For >500, Deduct	*-5.83*	
26 51 19 00-0859	LF	4 Circuit Track Lighting Track	47.78	9.02
		For >50 To 100, Deduct	*-1.53*	
		For >100 To 250, Deduct	*-2.73*	
		For >250 To 500, Deduct	*-4.78*	
		For >500, Deduct	*-6.83*	

26 51 19 00-0860 LED Track Lighting Fixtures *(26 51 19 00-0854)*

26 51 19 00-0861	EA	19 Watt, Dimmable, LED Track Lighting Fixture (Juno® TRAC-MASTER® Cylindra™)	226.89	18.83
		For >50 To 100, Deduct	*-6.38*	
		For >100 To 250, Deduct	*-12.05*	
		For >250 To 500, Deduct	*-22.69*	
		For >500, Deduct	*-33.33*	
26 51 19 00-0862	EA	18 Watt, Dimmable, LED Track Lighting Fixture (HALO® Stasis L805MED)	399.92	18.83
		For >50 To 100, Deduct	*-10.70*	
		For >100 To 250, Deduct	*-20.70*	
		For >250 To 500, Deduct	*-39.99*	
		For >500, Deduct	*-59.28*	
26 51 19 00-0863	EA	24 Watt, Dimmable, LED Track Lighting Fixture (Amerlux CNTRV33)	233.46	18.83
		For >50 To 100, Deduct	*-6.54*	
		For >100 To 250, Deduct	*-12.38*	
		For >250 To 500, Deduct	*-23.35*	
		For >500, Deduct	*-34.31*	

26 51 19 00-0864 Track Lighting Accessories *(26 51 19 00-0854)*

26 51 19 00-0865 Pendant Mounting *(26 51 19 00-0864)*

26 51 19 00-0866	EA	Track Lighting Pendant Mounting, Up to 12"	25.92	
		For >50 To 100, Deduct	*-1.07*	
		For >100 To 250, Deduct	*-1.72*	
		For >250 To 500, Deduct	*-2.59*	
		For >500, Deduct	*-3.47*	
26 51 19 00-0867	EA	Track Lighting Pendant Mounting, >12" To 24"	33.28	
		For >50 To 100, Deduct	*-1.31*	
		For >100 To 250, Deduct	*-2.14*	
		For >250 To 500, Deduct	*-3.33*	
		For >500, Deduct	*-4.51*	
26 51 19 00-0868	EA	Track Lighting Pendant Mounting, >24" To 36"	40.55	
		For >50 To 100, Deduct	*-1.58*	
		For >100 To 250, Deduct	*-2.59*	
		For >250 To 500, Deduct	*-4.06*	
		For >500, Deduct	*-5.52*	

26 51 19 00-0869 Other LED Fixtures And Trim *(26 51 19 00-0001)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0870	EA	21 LED, 27 Watt, Wall Mount Lightbar Fixture (Cooper Lighting McGraw-Edison IST-B01-E1-LED-GZW-BK)	728.24	87.59
		For >50 To 100, Deduct	*-22.59*	
		For >100 To 250, Deduct	*-40.79*	
		For >250 To 500, Deduct	*-72.82*	
		For >500, Deduct	*-104.86*	
26 51 19 00-0871	EA	7 LED, 27 Watt, Wall Mount Lightbar Fixture (Cooper Lighting McGraw-Edison IST-C01-E1-LED-GZW-BK)	728.24	87.59
		For >50 To 100, Deduct	*-22.59*	
		For >100 To 250, Deduct	*-40.79*	
		For >250 To 500, Deduct	*-72.82*	
		For >500, Deduct	*-104.86*	
26 51 19 00-0872	EA	3,600 Lumens, 29 Watt, 120 Degree Light Pattern, 2' Length Hazardous Location LED Fixture (Eaton Crous-Hinds MLL2/UNV1 S903 TF P)	1,236.62	41.22
		Note: 100-277 VAC driver, polycarbonate lens, through feed hubs, painted		
		For >50 To 100, Deduct	*-32.46*	
		For >100 To 250, Deduct	*-63.38*	
		For >250 To 500, Deduct	*-123.66*	
		For >500, Deduct	*-183.95*	
26 51 19 00-0873	EA	7,100 Lumens, 55 Watt, 120 Degree Light Pattern, 4' Length Hazardous Location LED Fixture (Eaton Crous-Hinds MLL4/UNV1 S903 TF P)	1,508.47	48.02
		Note: 100-277 VAC driver, polycarbonate lens, through feed hubs, painted		
		For >50 To 100, Deduct	*-39.52*	
		For >100 To 250, Deduct	*-77.23*	
		For >250 To 500, Deduct	*-150.85*	
		For >500, Deduct	*-224.47*	
26 51 19 00-0874	EA	3,600 Lumens, 29 Watt, 80 Degree Light Pattern, 2' Length Hazardous Location LED Fixture (Eaton Crous-Hinds MLL2N/UNV1 S903 TF P)	1,236.62	41.22
		Note: 100-277 VAC driver, polycarbonate lens, through feed hubs, painted		
		For >50 To 100, Deduct	*-32.46*	
		For >100 To 250, Deduct	*-63.38*	
		For >250 To 500, Deduct	*-123.66*	
		For >500, Deduct	*-183.95*	
26 51 19 00-0875	EA	7,100 Lumens, 55 Watt, 80 Degree Light Pattern, 4' Length Hazardous Location LED Fixture (Eaton Crous-Hinds MLL4N/UNV1 S903 TF P)	1,508.47	48.02
		Note: 100-277 VAC driver, polycarbonate lens, through feed hubs, painted		
		For >50 To 100, Deduct	*-39.52*	
		For >100 To 250, Deduct	*-77.23*	
		For >250 To 500, Deduct	*-150.85*	
		For >500, Deduct	*-224.47*	
26 51 19 00-0876	EA	3,600 Lumens, 29 Watt, 120 Degree Light Pattern, 2' Length Hazardous Location LED Fixture, With Battery Back-up (Eaton Crous-Hinds MLL2/UNV1 S903 TF P EM1)	1,279.64	41.22
		Note: 100-277 VAC driver, polycarbonate lens, through feed hubs, painted		
		For >50 To 100, Deduct	*-33.54*	
		For >100 To 250, Deduct	*-65.53*	
		For >250 To 500, Deduct	*-127.96*	
		For >500, Deduct	*-190.40*	
26 51 19 00-0877	EA	7,100 Lumens, 55 Watt, 120 Degree Light Pattern, 4' Length Hazardous Location LED Fixture, With Battery Back-up (Eaton Crous-Hinds MLL4/UNV1 S903 TF P EM1)	1,643.96	48.02
		Note: 100-277 VAC driver, polycarbonate lens, through feed hubs, painted		
		For >50 To 100, Deduct	*-42.90*	
		For >100 To 250, Deduct	*-84.00*	
		For >250 To 500, Deduct	*-164.40*	
		For >500, Deduct	*-244.79*	
26 51 19 00-0878	EA	3,600 Lumens, 29 Watt, 80 Degree Light Pattern, 2' Length Hazardous Location LED Fixture, With Battery Back-up (Eaton Crous-Hinds MLL2N/UNV1 S903 TF P EM1)	1,279.64	41.22
		Note: 100-277 VAC driver, polycarbonate lens, through feed hubs, painted		
		For >50 To 100, Deduct	*-33.54*	
		For >100 To 250, Deduct	*-65.53*	
		For >250 To 500, Deduct	*-127.96*	
		For >500, Deduct	*-190.40*	
26 51 19 00-0879	EA	7,100 Lumens, 55 Watt, 80 Degree Light Pattern, 4' Length Hazardous Location LED Fixture, With Battery Back-up (Eaton Crous-Hinds MLL4N/UNV1 S903 TF P EM1)	1,643.96	48.02
		Note: 100-277 VAC driver, polycarbonate lens, through feed hubs, painted		
		For >50 To 100, Deduct	*-42.90*	
		For >100 To 250, Deduct	*-84.00*	
		For >250 To 500, Deduct	*-164.40*	
		For >500, Deduct	*-244.79*	
26 51 19 00-0880	EA	Track Lighting Surface Mount Ceiling (WAC Lighting WT8-WT With WEDX-WT)	323.48	18.83
		For >50 To 100, Deduct	*-8.79*	
		For >100 To 250, Deduct	*-16.88*	
		For >250 To 500, Deduct	*-32.35*	
		For >500, Deduct	*-47.82*	
		For 120 Volt, WAC Lighting 6.75" Length Left Live End Connector For W-Track Systems, Add	*60.00*	
26 51 19 00-0881	EA	Track Lighting Head LED 4,570 Lumens, 3000K (WAC Lighting WTK -4023-30-WT With FP-K-WT)	460.10	18.83
		For >50 To 100, Deduct	*-12.21*	
		For >100 To 250, Deduct	*-23.71*	
		For >250 To 500, Deduct	*-46.01*	
		For >500, Deduct	*-68.31*	
		For WAC Lighting Track Lighting Adjustable Projector For WAC Track Heads, Add	*111.69*	
26 51 19 00-0882	EA	4' Length, 3,000 Lumens, 3500K CCT, Low Profile, LED Wraparound Linear Fixture (Lithonia BLWP4 30LHE ADSMT MVOLT EZ1 LP835 NLTAIR2 RIO/RES7)	167.51	37.71
		For >50 To 100, Deduct	*-5.60*	
		For >100 To 250, Deduct	*-9.79*	
		For >250 To 500, Deduct	*-16.75*	
		For >500, Deduct	*-23.71*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0883	EA	4' Length, 4,000 Lumens, 3500K CCT, Low Profile, LED Wraparound Linear Fixture (Lithonia BLWP4 4000LMHE ADSMT EZ1 LP835 NLTAIR2 RIO/RES7)	204.64	37.71
		For >50 To 100, Deduct	*-6.53*	
		For >100 To 250, Deduct	*-11.65*	
		For >250 To 500, Deduct	*-20.46*	
		For >500, Deduct	*-29.28*	
26 51 19 00-0884	EA	4' Length, 3,000 Lumens, 3500K CCT, LED Linear Strip Light Fixture (Lithonia CLX L48 3000LM HEF FDL MVOLT EZ1 35K 80CRI NLTAIR2 RIO/RES7 WH)	286.64	37.71
		For >50 To 100, Deduct	*-8.58*	
		For >100 To 250, Deduct	*-15.75*	
		For >250 To 500, Deduct	*-28.66*	
		For >500, Deduct	*-41.58*	
26 51 19 00-0885	EA	4' Length, 5,000 Lumens, 3500K CCT, LED Linear Strip Light Fixture (Lithonia CLX L48 5000LM HEF FDL MVOLT EZ1 35K 80CRI NLTAIR2 RIO/RES7 WH)	305.40	37.71
		For >50 To 100, Deduct	*-9.05*	
		For >100 To 250, Deduct	*-16.69*	
		For >250 To 500, Deduct	*-30.54*	
		For >500, Deduct	*-44.39*	
26 51 19 00-0886	EA	4' Length, 1,600 Lumens, 3500K CCT, Slot Wall Indirect/Direct Linear Fixture (Mark Lighting S4LWID LCB 4FT MSL4 80CRI 35K 400LMF I80CRI I35K I600LMF MIN1 MVOLT WHTT NLTAIR2)	486.89	37.71
		For >50 To 100, Deduct	*-13.59*	
		For >100 To 250, Deduct	*-25.76*	
		For >250 To 500, Deduct	*-48.69*	
		For >500, Deduct	*-71.62*	
26 51 19 00-0887	EA	6,000 Lumens, 8' Length, 3500K CCT, LED Linear Strip Light Fixture (Lithonia CLX L96 6000LM HEF FDL MVOLT EZ1 35K 80CRI NLTAIR2 RIO/RES7 WH)	433.05	44.62
		For >50 To 100, Deduct	*-12.50*	
		For >100 To 250, Deduct	*-23.33*	
		For >250 To 500, Deduct	*-43.31*	
		For >500, Deduct	*-63.28*	
26 51 19 00-0888	EA	4' Length, 3,000 Lumens, 3500K CCT, LED Linear Strip Light Fixture (Lithonia CLX L48 3000LM HEF FDL MVOLT EZ1 35K 80CRI NLTAIR2 RIO/RES7 MB)	286.64	37.71
		For >50 To 100, Deduct	*-8.58*	
		For >100 To 250, Deduct	*-15.75*	
		For >250 To 500, Deduct	*-28.66*	
		For >500, Deduct	*-41.58*	
26 51 19 00-0889	EA	8' Length, 6,000 Lumens, 3500K CCT, LED Linear Strip Light Fixture (Lithonia CLX L96 6000LM HEF FDL MVOLT EZ1 35K 80CRI NLTAIR2 RIO/RES7 MB)	433.05	44.62
		For >50 To 100, Deduct	*-12.50*	
		For >100 To 250, Deduct	*-23.33*	
		For >250 To 500, Deduct	*-43.31*	
		For >500, Deduct	*-63.28*	
26 51 19 00-0890	EA	2' x 2', 4,000 Lumens, 35000K CCT, LED Flat Panel (Lithonia EPANL 2x2 4000LM 80CRI 35K MIN10 EZT MVOLT NLTAIR2 RIO/RES7)	155.23	41.22
		For >50 To 100, Deduct	*-5.43*	
		For >100 To 250, Deduct	*-9.31*	
		For >250 To 500, Deduct	*-15.52*	
		For >500, Deduct	*-21.74*	
26 51 19 00-0891	EA	6" Round, 1,000 Lumens, 3500K CCT, Open And Wallwash LED Recessed Can (Lithonia LDN6 35/10 LR 8 AR LD MVOLT EZ1 NLTAIR2)	237.68	49.63
		For >50 To 100, Deduct	*-7.80*	
		For >100 To 250, Deduct	*-13.75*	
		For >250 To 500, Deduct	*-23.77*	
		For >500, Deduct	*-33.79*	
26 51 19 00-0892	EA	6" Round, 1,500 Lumens, 3500K CCT, Open And Wallwash LED Recessed Can (Lithonia LDN6 35/15 LR 8 AR LD MVOLT EZ1 NLTAIR2)	282.03	49.63
		For >50 To 100, Deduct	*-8.91*	
		For >100 To 250, Deduct	*-15.96*	
		For >250 To 500, Deduct	*-28.20*	
		For >500, Deduct	*-40.44*	
26 51 19 00-0893	EA	15,0000 Lumens, 3500K CCT, 10" Diameter, 30" Cylinder, LED Pendant Mount (Prescolite MC10LED-p-15L-35K-9-120V-2DM-FL35-30-BL)	488.34	52.55
		For >50 To 100, Deduct	*-14.40*	
		For >100 To 250, Deduct	*-26.61*	
		For >250 To 500, Deduct	*-48.83*	
		For >500, Deduct	*-71.06*	
26 51 19 00-0894	EA	14 Watt, LED Sconce (RAB HALV 10L 935 F S)	388.86	45.12
		For >50 To 100, Deduct	*-11.41*	
		For >100 To 250, Deduct	*-21.14*	
		For >250 To 500, Deduct	*-38.89*	
		For >500, Deduct	*-56.64*	
26 51 19 00-0895	EA	11" Diameter, 1,300 Lumens, 3500K CCT, LED SlimForm Surface Mount Fixture (Juno JSF 11IN 13LM 35K 90CRI MVOLT ZT WH)	140.46	45.12
		For >50 To 100, Deduct	*-5.20*	
		For >100 To 250, Deduct	*-8.72*	
		For >250 To 500, Deduct	*-14.05*	
		For >500, Deduct	*-19.38*	
26 51 19 00-0896	EA	13" Diameter, 4000K CCT, LED Surface Mount Fixture (Lithonia JSF 13IN 18LM 40K 90CRI MVOLT ZT WH)	171.26	45.12
		For >50 To 100, Deduct	*-5.97*	
		For >100 To 250, Deduct	*-10.26*	
		For >250 To 500, Deduct	*-17.13*	
		For >500, Deduct	*-24.00*	
26 51 19 00-0897	EA	13" Diameter, 3500K CCT, LED Surface Mount Fixture (Lithonia JSF 13IN 18LM 35K 90CRI MVOLT ZT WH)	172.25	45.12
		For >50 To 100, Deduct	*-6.00*	
		For >100 To 250, Deduct	*-10.30*	
		For >250 To 500, Deduct	*-17.23*	
		For >500, Deduct	*-24.15*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 19 00-0898	EA	12" x12", 1,300 Lumnes, 4000K CCT, LED Square SlimForm Surface Mount Fixture (Juno JSFSQ 12IN 13LM 40K 90CRI MVOLT ZT WH)	163.78	53.58
		For >50 To 100, Deduct	*-6.12*	
		For >100 To 250, Deduct	*-10.22*	
		For >250 To 500, Deduct	*-16.38*	
		For >500, Deduct	*-22.54*	
26 51 19 00-0899	EA	41 Watt, 3500K CCT, Wall Wash LED Track Lighting Head (Juno T259L G2 35K 80CRI PDIM WH)	490.50	18.83
		For >50 To 100, Deduct	*-12.97*	
		For >100 To 250, Deduct	*-25.23*	
		For >250 To 500, Deduct	*-49.05*	
		For >500, Deduct	*-72.87*	
26 51 19 00-0900	EA	4' Length, 4,000 Lumnes, 3500K CCT, Low-Profile Enclosed and Gasketed Industria LED Fixture (Lithonia FEM L48 4000LM LPAFL WD 277 GZ10 35K 80CRI NLTAIR2 RIO)	457.40	92.74
		For >50 To 100, Deduct	*-15.30*	
		For >100 To 250, Deduct	*-26.73*	
		For >250 To 500, Deduct	*-45.74*	
		For >500, Deduct	*-64.75*	
26 51 19 00-0901	EA	4' Length, 4,000 Lumnes, 3500K CCT, Low-Profile Enclosed and Gasketed Industria LED Fixture (Lithonia FEM L48 4000LM LPAFL WD 277 GZ10 35K 80CRI NLTAIR2 RESB0R10)	457.40	92.74
		For >50 To 100, Deduct	*-15.30*	
		For >100 To 250, Deduct	*-26.73*	
		For >250 To 500, Deduct	*-45.74*	
		For >500, Deduct	*-64.75*	
26 51 19 00-0902	EA	8' Length, 9,000 Lumnes, 3500K CCT, Low-Profile Enclosed and Gasketed Industria LED Fixture (Lithonia FEM L96 9000LM LPAFL WD 277 GZ10 35K 80CRI NLTAIR2 RIO)	605.17	92.74
		For >50 To 100, Deduct	*-18.99*	
		For >100 To 250, Deduct	*-34.12*	
		For >250 To 500, Deduct	*-60.52*	
		For >500, Deduct	*-86.91*	
26 51 19 00-0903	EA	8' Length, 9,000 Lumnes, 3500K CCT, Low-Profile Enclosed and Gasketed Industria LED Fixture (Lithonia FEM L96 9000LM LPAFL WD 277 GZ10 35K 80CRI NLTAIR2 RESB0R10)	605.17	92.74
		For >50 To 100, Deduct	*-18.99*	
		For >100 To 250, Deduct	*-34.12*	
		For >250 To 500, Deduct	*-60.52*	
		For >500, Deduct	*-86.91*	
26 51 19 00-0904	EA	4,000 Lumens, 34 Watt, 2 Light Squares, LED Wall Mount Fixture (McGraw Edison GWC - AF - 02 - LED - E1 - T4W - BZ- 600 - MS/DIM-L8)	814.75	82.45
		For >50 To 100, Deduct	*-24.49*	
		For >100 To 250, Deduct	*-44.86*	
		For >250 To 500, Deduct	*-81.48*	
		For >500, Deduct	*-118.09*	
26 51 19 00-0905	EA	1' x 4', 40 Watt, LED Flat Panel Direct/Indirect Light Suspension Mount (LumeGen LG-UDPL-40W-30K)	103.77	37.23
		For >50 To 100, Deduct	*-4.15*	
		For >100 To 250, Deduct	*-6.74*	
		For >250 To 500, Deduct	*-10.38*	
		For >500, Deduct	*-14.01*	
26 51 19 00-0906	EA	1,600 Lumens, Pendant Mounted LED Round Downlight With Aluminum Reflector (Edison Price FH-PM-XTM-L16S-35K-DMV-277-WHT-WW-VSM-36PX-UNIT/CPY)	1,905.40	105.12
		For >50 To 100, Deduct	*-52.01*	
		For >100 To 250, Deduct	*-99.65*	
		For >250 To 500, Deduct	*-190.54*	
		For >500, Deduct	*-281.43*	

26 51 23 HID Interior Lighting *(26 51)*

26 51 23 00-0001 Large Interior Area Fixtures *(26 51 23)*

26 51 23 00-0002 Recessed Mounted, Large Interior Area Fixtures *(26 51 23 00-0001)*

Note: Cast aluminum socket housing, anodized aluminum reflector, tempered glass or acrylic lens, plaster mounting frames and brackets.

26 51 23 00-0003 High Pressure Sodium, Recessed Mounted, Large Interior Area Fixtures *(26 51 23 00-0002)*

26 51 23 00-0004	EA	150 Watt High Pressure Sodium, Recessed Mounted, Large Interior Area Fixture	472.10	120.25
		For Wire Guard, Add	*40.50*	
		For Instant Quartz Restrike, Add	*60.00*	
26 51 23 00-0005	EA	250 Watt High Pressure Sodium, Recessed Mounted, Large Interior Area Fixture	491.19	127.69
		For Wire Guard, Add	*40.50*	
		For Instant Quartz Restrike, Add	*60.00*	
26 51 23 00-0006	EA	400 Watt High Pressure Sodium, Recessed Mounted, Large Interior Area Fixture	511.90	145.74
		For Wire Guard, Add	*40.50*	
		For Instant Quartz Restrike, Add	*60.00*	

26 51 23 00-0007 Metal Halide, Recessed Mounted, Large Interior Area Fixtures *(26 51 23 00-0002)*

26 51 23 00-0008	EA	150 Watt Metal Halide, Recessed Mounted, Large Interior Area Fixture	481.35	120.25
		For Wire Guard, Add	*40.50*	
		For Instant Quartz Restrike, Add	*60.00*	
26 51 23 00-0009	EA	250 Watt Metal Halide, Recessed Mounted, Large Interior Area Fixture	495.11	127.69
		For Wire Guard, Add	*40.50*	
		For Instant Quartz Restrike, Add	*60.00*	
26 51 23 00-0010	EA	400 Watt Metal Halide, Recessed Mounted, Large Interior Area Fixture	525.21	145.74
		For Wire Guard, Add	*40.50*	
		For Instant Quartz Restrike, Add	*60.00*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 23 00-0011		**Low Bay Fixtures, Large Interior Area Fixtures** *(26 51 23 00-0001)* Note: Heavy-duty steel housing, aluminum reflector, tempered glass or acrylic lens. Low bay fixtures are for mounting below 20-25 feet.		
26 51 23 00-0012		**High Pressure Sodium, Low Bay Fixtures** *(26 51 23 00-0011)*		
26 51 23 00-0013	EA	150 Watt High Pressure Sodium, Low Bay Fixture	499.10	109.85
		For Wire Guard, Add	*40.50*	
		For Enclosed And Gasketed, Add	*75.47*	
		For Instant Quartz Restrike, Add	*60.00*	
		For Glass Or Acrylic Reflector, Add	*90.00*	
26 51 23 00-0014	EA	250 Watt High Pressure Sodium, Low Bay Fixture	511.52	116.66
		For Wire Guard, Add	*40.50*	
		For Enclosed And Gasketed, Add	*75.47*	
		For Instant Quartz Restrike, Add	*60.00*	
		For Glass Or Acrylic Reflector, Add	*90.00*	
26 51 23 00-0015	EA	400 Watt High Pressure Sodium, Low Bay Fixture	538.56	133.14
		For Wire Guard, Add	*40.50*	
		For Enclosed And Gasketed, Add	*75.47*	
		For Instant Quartz Restrike, Add	*60.00*	
		For Glass Or Acrylic Reflector, Add	*90.00*	
26 51 23 00-0016		**Metal Halide, Low Bay Fixtures** *(26 51 23 00-0011)*		
26 51 23 00-0017	EA	175 Watt Metal Halide, Low Bay Fixture	493.64	109.85
		For Wire Guard, Add	*40.50*	
		For Enclosed And Gasketed, Add	*75.47*	
		For Instant Quartz Restrike, Add	*60.00*	
		For Glass Or Acrylic Reflector, Add	*90.00*	
26 51 23 00-0018	EA	250 Watt Metal Halide, Low Bay Fixture	505.24	116.66
		For Wire Guard, Add	*40.50*	
		For Enclosed And Gasketed, Add	*75.47*	
		For Instant Quartz Restrike, Add	*60.00*	
		For Glass Or Acrylic Reflector, Add	*90.00*	
26 51 23 00-0019	EA	400 Watt Metal Halide, Low Bay Fixture	543.41	133.14
		For Wire Guard, Add	*40.50*	
		For Enclosed And Gasketed, Add	*75.47*	
		For Instant Quartz Restrike, Add	*60.00*	
		For Glass Or Acrylic Reflector, Add	*90.00*	
26 51 23 00-0020		**High Bay Fixtures, Large Interior Area Fixtures** *(26 51 23 00-0001)* Note: High bay fixtures are for mounting above 20-25 feet. See CSI section 01 22 23 00-0001 for lifts.		
26 51 23 00-0021		**High Pressure Sodium, High Bay Fixtures** *(26 51 23 00-0020)* Note: Includes heavy-duty steel housing and aluminum reflector. Excludes lens.		
26 51 23 00-0022	EA	250 Watt High Pressure Sodium, High Bay Fixture	452.62	116.66
		For Wire Guard, Add	*40.50*	
		For Instant Quartz Restrike, Add	*60.00*	
		For Glass Or Acrylic Reflector, Add	*90.00*	
		For Tempered Glass Or Acrylic Lens, Add	*60.50*	
		For Polycarbonate Lens, Add	*47.75*	
		For Security Chain, Add	*19.34*	
		For Optical Safety Chain, Add	*7.47*	
		For Ballast Safety Chain, Add	*12.13*	
26 51 23 00-0023	EA	400 Watt High Pressure Sodium, High Bay Fixture	485.88	133.14
		For Wire Guard, Add	*40.50*	
		For Instant Quartz Restrike, Add	*60.00*	
		For Glass Or Acrylic Reflector, Add	*90.00*	
		For Tempered Glass Or Acrylic Lens, Add	*60.50*	
		For Polycarbonate Lens, Add	*47.75*	
		For Security Chain, Add	*19.34*	
		For Optical Safety Chain, Add	*7.47*	
		For Ballast Safety Chain, Add	*12.13*	
26 51 23 00-0024	EA	1,000 Watt High Pressure Sodium, High Bay Fixture	730.31	140.04
		For Wire Guard, Add	*40.50*	
		For Instant Quartz Restrike, Add	*60.00*	
		For Glass Or Acrylic Reflector, Add	*90.00*	
		For Tempered Glass Or Acrylic Lens, Add	*60.50*	
		For Polycarbonate Lens, Add	*47.75*	
		For Security Chain, Add	*19.34*	
		For Optical Safety Chain, Add	*7.47*	
		For Ballast Safety Chain, Add	*12.13*	
26 51 23 00-0025		**Metal Halide, High Bay Fixtures** *(26 51 23 00-0020)* Note: Includes heavy-duty steel housing and aluminum reflector. Excludes lens.		
26 51 23 00-0026	EA	250 Watt Metal Halide, High Bay Fixture	418.68	116.66
		For Wire Guard, Add	*40.50*	
		For Instant Quartz Restrike, Add	*60.00*	
		For Glass Or Acrylic Reflector, Add	*90.00*	
		For Tempered Glass Or Acrylic Lens, Add	*60.50*	
		For Polycarbonate Lens, Add	*47.75*	
		For Security Chain, Add	*19.34*	
		For Optical Safety Chain, Add	*7.47*	
		For Ballast Safety Chain, Add	*12.13*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 23 00-0027	EA	400 Watt Metal Halide, High Bay Fixture	456.61	133.14
		For Wire Guard, Add	*40.50*	
		For Instant Quartz Restrike, Add	*60.00*	
		For Glass Or Acrylic Reflector, Add	*90.00*	
		For Tempered Glass Or Acrylic Lens, Add	*60.50*	
		For Polycarbonate Lens, Add	*47.75*	
		For Security Chain, Add	*19.34*	
		For Optical Safety Chain, Add	*7.47*	
		For Ballast Safety Chain, Add	*12.13*	
26 51 23 00-0028	EA	1,000 Watt Metal Halide, High Bay Fixture	612.08	140.04
		For Wire Guard, Add	*40.50*	
		For Instant Quartz Restrike, Add	*60.00*	
		For Glass Or Acrylic Reflector, Add	*90.00*	
		For Tempered Glass Or Acrylic Lens, Add	*60.50*	
		For Polycarbonate Lens, Add	*47.75*	
		For Security Chain, Add	*19.34*	
		For Optical Safety Chain, Add	*7.47*	
		For Ballast Safety Chain, Add	*12.13*	

26 51 23 00-0029 Induction, High Bay Fixtures *(26 51 23 00-0020)*

26 51 23 00-0030 Induction, High Bay Fixtures (Everlast®) *(26 51 23 00-0029)*

Note: Includes die cast aluminum ballast casing and acrylic lens.

26 51 23 00-0031	EA	100 Watt Induction, High Bay Fixture (Everlast® Huron EHBUS-AC)	523.97	102.02
		For Impact Resistant Silicon Lens, Add	*20.00*	
26 51 23 00-0032	EA	120 Watt Induction, High Bay Fixture (Everlast® Huron EHBUS-AC)	563.34	105.42
		For Impact Resistant Silicon Lens, Add	*20.00*	
26 51 23 00-0033	EA	150 Watt Induction, High Bay Fixture (Everlast® Huron EHBUS-AC)	573.21	108.82
		For Impact Resistant Silicon Lens, Add	*20.00*	
26 51 23 00-0034	EA	200 Watt Induction, High Bay Fixture (Everlast® Huron EHBUS-AC)	626.72	112.23
		For Impact Resistant Silicon Lens, Add	*20.00*	
26 51 23 00-0035	EA	250 Watt Induction, High Bay Fixture (Everlast® Huron EHBUS-AC)	642.50	115.63
		For Impact Resistant Silicon Lens, Add	*20.00*	
26 51 23 00-0036	EA	100 Watt Induction, Variable Dimming, High Bay Fixture (Everlast® Huron EHBUS-AC)	565.26	102.02
		For Impact Resistant Silicon Lens, Add	*20.00*	
26 51 23 00-0037	EA	120 Watt Induction, Variable Dimming, High Bay Fixture (Everlast® Huron EHBUS-AC)	604.63	105.42
		For Impact Resistant Silicon Lens, Add	*20.00*	
26 51 23 00-0038	EA	150 Watt Induction, Variable Dimming, High Bay Fixture (Everlast® Huron EHBUS-AC)	614.50	108.82
		For Impact Resistant Silicon Lens, Add	*20.00*	
26 51 23 00-0039	EA	200 Watt Induction, Variable Dimming, High Bay Fixture (Everlast® Huron EHBUS-AC)	668.01	112.23
		For Impact Resistant Silicon Lens, Add	*20.00*	
26 51 23 00-0040	EA	250 Watt Induction, Variable Dimming, High Bay Fixture (Everlast® Huron EHBUS-AC)	683.79	115.63
		For Impact Resistant Silicon Lens, Add	*20.00*	

26 51 23 00-0041 Ceiling Mounted, Large Interior Area Fixtures *(26 51 23 00-0001)*

Note: Heavy-duty aluminum housing, aluminum reflector, acrylic drop dish lens, fully gasketed.

26 51 23 00-0042 High Pressure Sodium, Ceiling Mounted, Large Interior Area Fixtures *(26 51 23 00-0041)*

26 51 23 00-0043	EA	100 Watt High Pressure Sodium, Ceiling Mounted, Large Interior Area Fixture	393.33	78.17
		For Wire Guard, Add	*40.50*	
		For Instant Quartz Restrike, Add	*60.00*	
		For Polycarbonate Lens, Add	*47.75*	
26 51 23 00-0044	EA	150 Watt High Pressure Sodium, Ceiling Mounted, Large Interior Area Fixture	692.06	78.17
		For Wire Guard, Add	*40.50*	
		For Instant Quartz Restrike, Add	*60.00*	
		For Polycarbonate Lens, Add	*47.75*	
26 51 23 00-0045	EA	250 Watt High Pressure Sodium, Ceiling Mounted, Large Interior Area Fixture	796.70	78.17
		For Wire Guard, Add	*40.50*	
		For Instant Quartz Restrike, Add	*60.00*	
		For Polycarbonate Lens, Add	*47.75*	
26 51 23 00-0046	EA	400 Watt High Pressure Sodium, Ceiling Mounted, Large Interior Area Fixture	1,069.22	78.17
		For Wire Guard, Add	*40.50*	
		For Instant Quartz Restrike, Add	*60.00*	
		For Polycarbonate Lens, Add	*47.75*	

26 51 23 00-0047 Metal Halide, Ceiling Mounted, Large Interior Area Fixtures *(26 51 23 00-0041)*

26 51 23 00-0048	EA	100 Watt Metal Halide, Ceiling Mounted, Large Interior Area Fixture	309.90	78.17
		For Wire Guard, Add	*40.50*	
		For Instant Quartz Restrike, Add	*60.00*	
		For Polycarbonate Lens, Add	*47.75*	
26 51 23 00-0049	EA	175 Watt Metal Halide, Ceiling Mounted, Large Interior Area Fixture	325.12	86.75
		For Wire Guard, Add	*40.50*	
		For Instant Quartz Restrike, Add	*60.00*	
		For Polycarbonate Lens, Add	*47.75*	
26 51 23 00-0050	EA	250 Watt Metal Halide, Ceiling Mounted, Large Interior Area Fixture	345.42	93.96
		For Wire Guard, Add	*40.50*	
		For Instant Quartz Restrike, Add	*60.00*	
		For Polycarbonate Lens, Add	*47.75*	
26 51 23 00-0051	EA	400 Watt Metal Halide, Ceiling Mounted, Large Interior Area Fixture	386.47	111.90
		For Wire Guard, Add	*40.50*	
		For Instant Quartz Restrike, Add	*60.00*	
		For Polycarbonate Lens, Add	*47.75*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 23 00-0052		**High Pressure Sodium, Recessed Fixture Housings** *(26 51 23)*		
26 51 23 00-0053	EA	4" Round, High Pressure Sodium, T Or ICT Recessed Fixture Housing	164.81	32.49
		For ICAT Housing, Add	*15.00*	
26 51 23 00-0054	EA	5" Round, High Pressure Sodium, T Or ICT Recessed Fixture Housing	172.58	32.49
		For ICAT Housing, Add	*16.01*	
26 51 23 00-0055	EA	6" Round, High Pressure Sodium, T Or ICT Recessed Fixture Housing	181.30	33.84
		For ICAT Housing, Add	*16.84*	
26 51 23 00-0056	EA	7" Round, High Pressure Sodium, T Or ICT Recessed Fixture Housing	187.79	35.30
		For ICAT Housing, Add	*17.39*	
26 51 23 00-0057	EA	8" Round, High Pressure Sodium, T Or ICT Recessed Fixture Housing	194.21	36.78
		For ICAT Housing, Add	*17.92*	
26 51 23 00-0058	EA	10" To 12" Square, High Pressure Sodium, T Or ICT Recessed Fixture Housing	199.66	39.03
		For ICAT Housing, Add	*18.19*	
26 51 23 00-0059		**Metal Halide Track Lighting Fixtures** *(26 51 23)*		
26 51 23 00-0060	EA	Metal Halide Track Lighting Fixture	107.81	18.83
26 51 23 00-0061		**Metal Halide, Wet Location, Dust Resistant, Cast Metal Guard, Enclosed And Gasketed, Vapor Tight Fixtures** *(26 51 23)*		
26 51 23 00-0062	EA	75 Watt Metal Halide, Ceiling Mounted, Cast Metal Guard, Enclosed And Gasketed, Vapor Tight Fixture	170.12	45.12
		For Wall Mounted, Add	*6.30*	
26 51 23 00-0063	EA	100 Watt Metal Halide, Ceiling Mounted, Cast Metal Guard, Enclosed And Gasketed, Vapor Tight Fixture	175.36	45.12
		For Wall Mounted, Add	*6.30*	
26 51 23 00-0064	EA	150 Watt Metal Halide, Ceiling Mounted, Cast Metal Guard, Enclosed And Gasketed, Vapor Tight Fixture	186.00	45.12
		For Wall Mounted, Add	*6.30*	
26 51 23 00-0065	EA	175 Watt Metal Halide, Ceiling Mounted, Cast Metal Guard, Enclosed And Gasketed, Vapor Tight Fixture	202.01	45.12
		For Wall Mounted, Add	*6.30*	
26 51 23 00-0066		**High Pressure Sodium, Wet Location, Dust Resistant, Cast Metal Guard, Enclosed And Gasketed, Vapor Tight Fixtures** *(26 51 23)*		
26 51 23 00-0067	EA	70 Watt High Pressure Sodium, Ceiling Mounted, Cast Metal Guard, Enclosed And Gasketed, Vapor Tight Fixture	157.65	45.12
		For Wall Mounted, Add	*6.67*	
26 51 23 00-0068	EA	100 Watt High Pressure Sodium, Ceiling Mounted, Cast Metal Guard, Enclosed And Gasketed, Vapor Tight Fixture	164.16	45.12
		For Wall Mounted, Add	*6.67*	
26 51 23 00-0069	EA	150 Watt High Pressure Sodium, Ceiling Mounted, Cast Metal Guard, Enclosed And Gasketed, Vapor Tight Fixture	189.32	45.12
		For Wall Mounted, Add	*6.67*	
26 51 33		**Interior Lighting Accessories** *(26 51)*		
26 51 33 00-0001		**Accessories And Modifiers For Fixtures** *(26 51 33)*		
26 51 33 00-0002		**Lens Modifications** *(26 51 33 00-0001)*		
26 51 33 00-0003	EA	For 1' x 2' Drop Dish Diffuser Instead Of Prismatic Lens, Add	39.80	
26 51 33 00-0004	EA	For 1' x 4' Drop Dish Diffuser Instead Of Prismatic Lens, Add	49.17	
26 51 33 00-0005	EA	For 2' x 2' Drop Dish Diffuser Instead Of Prismatic Lens, Add	51.51	
26 51 33 00-0006	EA	For 2' x 4' Drop Dish Diffuser Instead Of Prismatic Lens, Add	56.19	
26 51 33 00-0007	EA	For 4' x 4' Drop Dish Diffuser Instead Of Prismatic Lens, Add	67.89	
26 51 33 00-0008	EA	For 1' x 2' Egg Crate/Cube Louvers Instead Of Prismatic Lens, Add	16.39	
26 51 33 00-0009	EA	For 1' x 4' Egg Crate/Cube Louvers Instead Of Prismatic Lens, Add	23.41	
26 51 33 00-0010	EA	For 2' x 2' Egg Crate/Cube Louvers Instead Of Prismatic Lens, Add	25.75	
26 51 33 00-0011	EA	For 2' x 4' Egg Crate/Cube Louvers Instead Of Prismatic Lens, Add	30.44	
26 51 33 00-0012		**Pendant Mounting Modifications** *(26 51 33 00-0001)* Note: Per pendant. Use demolition cost for associated light fixture for demolition of pendant mounted light fixture assembly.		
26 51 33 00-0013	EA	For Pendant Mounting Up to 1'-6" Long Section Note: Per pendant.	17.79	
26 51 33 00-0014	EA	For Pendant Mounting 2' Long Section Note: Per pendant.	20.60	
26 51 33 00-0015	EA	For Pendant Mounting 3' Long Section Note: Per pendant.	26.36	
26 51 33 00-0016	EA	For Pendant Mounting 4' Long Section Note: Per pendant.	31.14	
26 51 33 00-0017	EA	For Pendant Mounting 6' Long Section Note: Per pendant.	39.33	
26 51 33 00-0018	EA	For Pendant Mounting 8' Long Section Note: Per pendant.	53.38	
26 51 33 00-0019		**Fluorescent Light Accessories** *(26 51 33 00-0001)*		
26 51 33 00-0020	EA	Blank Metal Light Box Plate	31.91	
26 51 33 00-0021	EA	Factory Installed Fixture Mounted Occupancy Sensor	180.25	
26 51 33 00-0022	EA	Factory Installed Inboard/Outboard Switching And Ballast	120.54	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 51 33 00-0023		Wire Guards *(26 51 33 00-0001)*		
26 51 33 00-0024	EA	Wire Guard for 6" x 2' Fixture	73.89	5.65
26 51 33 00-0025	EA	Wire Guard for 6" x 4' Fixture	103.20	9.04
26 51 33 00-0026	EA	Wire Guard for 1" x 2' Fixture	82.53	6.22
26 51 33 00-0027	EA	Wire Guard for 1" x 4' Fixture	116.85	9.61
26 51 33 00-0028	EA	Wire Guard for 2" x 2' Fixture	101.18	6.78
26 51 33 00-0029	EA	Wire Guard for 2" x 4' Fixture	138.00	10.17
26 51 33 00-0030		Lighting Accessories *(26 51 33)*		
26 51 33 00-0031		Modular Flexible Wiring Systems *(26 51 33 00-0030)*		
26 51 33 00-0032	EA	10' Length, 2-Circuit, Modular Power Cable (Day-Brite PC-12-2E-10)	105.44	6.09
26 51 33 00-0033	EA	15' Length, 2-Circuit, Modular Power Cable (Day-Brite PC-12-2E-15)	126.58	6.09
26 51 33 00-0034	EA	20' Length, 2-Circuit, Modular Power Cable (Day-Brite PC-12-2E-20)	153.81	6.09
26 51 33 00-0035	EA	15' Length, 2-Circuit, Modular Lighting Cable (Day-Brite LC-27-2E-15)	126.58	6.09
26 51 33 00-0036	EA	3 Out, 3-Circuit, Modular Lighting Interface (Day-Brite LI-27-3E)	101.25	6.09
26 51 33 00-0037	EA	13' Length, 2-Circuit, Modular Reddy-Connect Cable (Day-Brite RC-27-2D-13)	156.08	6.09
26 51 33 00-0038	EA	3" Length, 2-Circuit, Modular Lighting Adapter (Day-Brite LA-27-7M)	83.03	6.09
26 51 33 00-0039	EA	3" Length, 2-Circuit, Modular Lighting Tap (Day-Brite LT-27-2E)	95.16	6.09
26 51 33 00-0040	EA	7' Length, Single Level, Modular Lighting Switch Unit (Day-Brite LS-27-SL-07)	126.86	6.09
26 51 33 00-0041	EA	7' Length, 1-Circuit Multi-Level, Modular Lighting Switch Unit (Day-Brite LS-27-ML-07)	126.86	6.09
26 51 33 00-0042	EA	7' Length, 2-Circuit Multi-Level, Modular Lighting Switch Unit (Day-Brite LS-27-2C-07)	129.15	6.09
26 51 33 00-0043	EA	7' Length, 1st 3-Way, Modular Lighting Switch Unit (Day-Brite LS-27-3A-07)	128.30	6.09
26 51 33 00-0044	EA	7' Length, 2nd 3-Way, Modular Lighting Switch Unit (Day-Brite LS-27-3B-07)	128.30	6.09
26 51 33 00-0045	EA	15' Length, Single Level, Modular Lighting Switch Unit (Day-Brite LS-27-SL-15)	148.71	6.09
26 51 33 00-0046	EA	3" Length, 2-Circuit, Modular Lighting Adapter (Day-Brite LA-27-4D)	63.80	6.09
26 51 33 00-0047	EA	3" Length, 1-Circuit, Modular Lighting Distribution Cable (Day-Brite LD-27-1E)	59.04	6.09
26 51 33 00-0048	EA	3" Length, 2-Circuit, Modular Lighting Distribution Cable (Day-Brite LD-27-2E)	60.70	6.09
26 51 33 00-0049	EA	3" Length, 1-Circuit, Modular Lighting Tap (Day-Brite LT-27-1E)	78.36	6.09
26 51 33 00-0050	EA	15' Length, 1-Circuit, Modular Lighting Tap (Day-Brite LT-27-1E-15)	105.44	6.09
26 51 33 00-0051	EA	15' Length, 1-Circuit, Modular Lighting Cable (Day-Brite LC-27-1E-15)	108.31	6.09
26 51 33 00-0052	EA	Modular Lighting Junction Or Circuit Splitter (Day-Brite LJ-27-3E)	82.75	6.09
26 51 33 00-0053	EA	3" Length, 1-Circuit, Modular Power Distribution Cable (Day-Brite PD-12-1E)	59.04	6.09
26 51 33 00-0054	EA	Removal And Reinstallation Of Modular Wiring Complete Including Storage And Cleaning	50.76	
26 51 33 00-0055		Additional Lighting Wire Whips *(26 51 33)*		
26 51 33 00-0056	LF	For Each Additional LF Of Interior Lighting Wire Whip, Add Note: Wire whips are included with interior lighting fixtures, where necessary, up to six feet in length. Use this task for additional required whip length. For example, if the fixture requires a 15' wire whip then use 9 LF of this task to reach required length.	1.95	
26 51 33 00-0057		Removal And Reinstallation Of Light Fixtures *(26 51 33)* Note: Includes disconnection of wire, on-site storage, general cleaning, installation and electrical wire hook-up.		
26 51 33 00-0058	EA	Removal And Reinstallation Of Lay-In Fluorescent Light Fixture	120.06	
26 51 33 00-0059	EA	Removal And Reinstallation Of Surface Mounted Or Pendant Light Fixture	137.21	

26 52 Safety Lighting *(26 50)*

26 52 13 Emergency and Exit Lighting *(26 52)*

26 52 13 13 Emergency Lighting *(26 52 13)*

26 52 13 13-0001		Commercial Emergency Lights *(26 52 13 13)*		
26 52 13 13-0002		Polycarbonate Housing, Commercial Emergency Lights *(26 52 13 13-0001)* Note: Includes lead-calcium batteries and two adjustable lamp heads.		
26 52 13 13-0003	EA	3 Max Wattage At 90 Minutes, 3.6 Volt, Polycarbonate Housing, LED Lamps, Commercial Emergency Light (Lithonia ELM2 LED)	252.81	28.20
26 52 13 13-0004	EA	10.8 Max Wattage At 90 Minutes, 6 Volt, Polycarbonate Housing, Krypton Lamps, Commercial Emergency Light (Lithonia ELM2)	170.26	28.20
		For Halogen Lamps, Add	*27.55*	
		For Self-Diagnostics, Add	*87.50*	
26 52 13 13-0005	EA	18 Max Wattage At 90 Minutes, 6 Volt, Polycarbonate Housing, Krypton Lamps, Commercial Emergency Light (Lithonia ELM618)	278.29	28.20
		For Halogen Lamps, Add	*27.55*	
		For Self-Diagnostics, Add	*87.50*	
26 52 13 13-0006	EA	27 Max Wattage At 90 Minutes, 6 Volt, Remote Capability, Polycarbonate Housing, Krypton Lamps, Commercial Emergency Light (Lithonia ELM627)	327.20	28.20
		For Halogen Lamps, Add	*27.55*	
		For Self-Diagnostics, Add	*87.50*	
26 52 13 13-0007	EA	54 Max Wattage At 90 Minutes, 6 Volt, Remote Capability, Polycarbonate Housing, Krypton Lamps, Commercial Emergency Light (Lithonia ELM654)	495.26	28.20
		For Halogen Lamps, Add	*27.55*	
		For Self-Diagnostics, Add	*87.50*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 52 13 13-0008	EA	54 Max Wattage At 90 Minutes, 12 Volt, Remote Capability, Polycarbonate Housing, Krypton Lamps, Commercial Emergency Light (Lithonia ELM1254)	563.49	28.20
		For Halogen Lamps, Add	*27.55*	
		For Self-Diagnostics, Add	*87.50*	
26 52 13 13-0009	EA	72 Max Wattage At 90 Minutes, 12 Volt, Remote Capability, Polycarbonate Housing, Krypton Lamps, Commercial Emergency Light (Lithonia ELM1272)	829.29	28.20
		For Halogen Lamps, Add	*27.55*	
		For Self-Diagnostics, Add	*87.50*	
26 52 13 13-0010		**Remote Heads For Commercial Emergency Lights** *(26 52 13 13-0001)*		
		Note: For use with fixtures that have remote capability.		
26 52 13 13-0011	EA	6 Watt, 6 Volt, Aluminum Housing, Halogen Lamp, Emergency Light Remote Head (Lithonia ELA MT H0606)	172.22	16.92
26 52 13 13-0012	EA	6 Watt, 6 Volt, Gasketed Fiberglass Housing, Halogen Lamp, Emergency Light Remote Head (Lithonia ELA NX H0606)	173.45	16.92
26 52 13 13-0013	EA	8 Watt, 8 Volt, Gasketed Fiberglass Housing, Halogen Lamp, Emergency Light Remote Head (Lithonia ELA NX H0806)	177.58	16.92
26 52 13 13-0014	EA	12 Watt, 12 Volt, Aluminum Housing, Halogen Lamp, Emergency Light Remote Head (Lithonia ELA MT H1212)	176.91	16.92
26 52 13 13-0015	EA	12 Watt, 12 Volt, Thermoplastic Housing, Halogen Lamp, Emergency Light Remote Head (Lithonia ELA H1212)	151.57	16.92
26 52 13 13-0016	EA	12 Watt, 12 Volt, Thermoplastic Housing, Incandescent Lamp, Emergency Light Remote Head (Lithonia ELA N1206)	101.27	16.92
26 52 13 13-0017		**Industrial Emergency Lights** *(26 52 13 13)*		
26 52 13 13-0018		**Painted Steel Housing, Industrial Emergency Lights** *(26 52 13 13-0017)*		
26 52 13 13-0019		**Painted Steel Housing, Industrial Emergency Lights** *(26 52 13 13-0018)*		
		Note: Includes lead-calcium batteries and two adjustable lamp heads.		
26 52 13 13-0020	EA	16 Max Wattage At 90 Minutes, 6 Volt, Painted Steel Housing, Incandescent Lamps, Industrial Emergency Light (Lithonia ELT16)	458.14	28.20
		For Wireguard, Add	*241.72*	
26 52 13 13-0021	EA	24 Max Wattage At 90 Minutes, 6 Volt, Remote Capability, Painted Steel Housing, Incandescent Lamps, Industrial Emergency Light (Lithonia ELT24)	381.81	28.20
		For Wireguard, Add	*241.72*	
26 52 13 13-0022	EA	36 Max Wattage At 90 Minutes, 6 Volt, Remote Capability, Painted Steel Housing, Incandescent Lamps, Industrial Emergency Light (Lithonia ELT36)	604.89	28.20
		For Wireguard, Add	*241.72*	
26 52 13 13-0023	EA	50 Max Wattage At 90 Minutes, 12 Volt, Remote Capability, Painted Steel Housing, Incandescent Lamps, Industrial Emergency Light (Lithonia ELT50)	643.39	28.20
		For Wireguard, Add	*241.72*	
26 52 13 13-0024	EA	125 Max Wattage At 90 Minutes, 12 Volt, Remote Capability, Painted Steel Housing, Incandescent Lamps, Industrial Emergency Light (Lithonia ELT125)	925.73	28.20
		For Wireguard, Add	*257.45*	
26 52 13 13-0025	EA	275 Max Wattage At 90 Minutes, 12 Volt, Remote Capability, Painted Steel Housing, Incandescent Lamps, Industrial Emergency Light (Lithonia ELT275)	1,465.85	28.20
		For Wireguard, Add	*257.45*	
26 52 13 13-0026		**Remote Heads For Painted Steel Housing, Industrial Emergency Lights** *(26 52 13 13-0018)*		
		Note: For use with fixtures that have remote capability.		
26 52 13 13-0027	EA	8 Watt, 6 Volt, Thermoplastic Housing, Incandescent Lamp, Emergency Light Remote Head (Lithonia ELA N0806)	130.26	16.92
		For Wireguard, Add	*195.07*	
26 52 13 13-0028	EA	12 Watt, 6 Volt, Thermoplastic Housing, Incandescent Lamp, Emergency Light Remote Head (Lithonia ELA N1206)	135.06	16.92
		For Wireguard, Add	*195.07*	
26 52 13 13-0029	EA	8 Watt, 12 Volt, Thermoplastic Housing, Halogen Lamp, Emergency Light Remote Head (Lithonia ELA H0812)	130.93	16.92
		For Wireguard, Add	*195.07*	
26 52 13 13-0030	EA	12 Watt, 12 Volt, Thermoplastic Housing, Incandescent Lamp, Emergency Light Remote Head (Lithonia ELA N1212)	131.71	16.92
		For Wireguard, Add	*195.07*	
26 52 13 13-0031	EA	12 Watt, 25 Volt, Thermoplastic Housing, Incandescent Lamp, Emergency Light Remote Head (Lithonia ELA N2512)	135.06	16.92
		For Wireguard, Add	*195.07*	
26 52 13 13-0032	EA	12 Watt, 25 Volt, Aluminum Housing, Incandescent Lamp, Emergency Light Remote Head (Lithonia ELA MT N2512)	159.38	16.92
		For Wireguard, Add	*195.07*	
26 52 13 13-0033		**Rugged Injection-Molded Thermoplastic Housing, Industrial Emergency Lights** *(26 52 13 13-0017)*		
26 52 13 13-0034		**Rugged Injection-Molded Thermoplastic Housing, Industrial Emergency Lights** *(26 52 13 13-0033)*		
		Note: Includes lead-calcium batteries and two adjustable lamp heads.		
26 52 13 13-0035	EA	18 Max Wattage At 90 Minutes, 6 Volt, Krypton Lamps, Rugged Injection-Molded Thermoplastic Housing, Industrial Emergency Light (Lithonia IND618)	452.01	28.20
		For Wireguard, Add	*235.02*	
		For Self-Diagnostics, Add	*105.50*	
26 52 13 13-0036	EA	36 Max Wattage At 90 Minutes, 12 Volt, Remote Capability, Krypton Lamps, Rugged Injection-Molded Thermoplastic Housing, Industrial Emergency Light (Lithonia IND1236)	492.74	28.20
		For Wireguard, Add	*235.02*	
		For Self-Diagnostics, Add	*105.50*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 52 13 13-0037	EA	54 Max Wattage At 90 Minutes, 6 Volt, Remote Capability, Krypton Lamps, Rugged Injection-Molded Thermoplastic Housing, Industrial Emergency Light (Lithonia IND654)	481.58	28.20
		For Wireguard, Add	*235.02*	
		For Self-Diagnostics, Add	*105.50*	
26 52 13 13-0038	EA	54 Max Wattage At 90 Minutes, 12 Volt, Remote Capability, Krypton Lamps, Rugged Injection-Molded Thermoplastic Housing, Industrial Emergency Light (Lithonia IND1254)	510.04	28.20
		For Wireguard, Add	*235.02*	
		For Self-Diagnostics, Add	*105.50*	
26 52 13 13-0039	EA	100 Max Wattage At 90 Minutes, 12 Volt, Remote Capability, Krypton Lamps, Rugged Injection-Molded Thermoplastic Housing, Industrial Emergency Light (Lithonia IND12100)	870.49	28.20
		For Wireguard, Add	*235.02*	
		For Self-Diagnostics, Add	*105.50*	
26 52 13 13-0040	EA	18 Max Wattage At 90 Minutes, 6 Volt, Krypton Lamps, NEMA 4X, Rugged Injection-Molded Thermoplastic Housing, Harsh Environment Industrial Emergency Light (Lithonia INDX618)	680.22	28.20
		For Wireguard, Add	*235.02*	
		For Self-Diagnostics, Add	*61.50*	
26 52 13 13-0041	EA	36 Max Wattage At 90 Minutes, 12 Volt, Remote Capability, Krypton Lamps, NEMA 4X, Rugged Injection-Molded Thermoplastic Housing, Harsh Environment Industrial Emergency Light (Lithonia INDX1236)	763.92	28.20
		For Wireguard, Add	*235.02*	
		For Self-Diagnostics, Add	*61.50*	
26 52 13 13-0042	EA	54 Max Wattage At 90 Minutes, 12 Volt, Remote Capability, Krypton Lamps, NEMA 4X, Rugged Injection-Molded Thermoplastic Housing, Harsh Environment Industrial Emergency Light (Lithonia INDX1254)	806.32	28.20
		For Wireguard, Add	*235.02*	
		For Self-Diagnostics, Add	*61.50*	

26 52 13 13-0043 Remote Heads For Rugged Injection-Molded Thermoplastic Housing, Industrial Emergency Lights *(26 52 13 13-0033)*

Note: For use with fixtures that have remote capability.

26 52 13 13-0044	EA	9 Watt, 6 Volt, Heavyweight Polycarbonate Housing, Krypton Lamp, Emergency Light Remote Head (Lithonia ELA IND K0906)	111.85	16.92
26 52 13 13-0045	EA	12 Watt, 6 Volt, Heavyweight Polycarbonate Housing, Halogen Lamp, Emergency Light Remote Head (Lithonia ELA IND H1206)	121.55	16.92
26 52 13 13-0046	EA	9 Watt, 12 Volt, Heavyweight Polycarbonate Housing, Krypton Lamp, Emergency Light Remote Head (Lithonia ELA IND K0912)	111.96	16.92
26 52 13 13-0047	EA	12 Watt, 12 Volt, Heavyweight Polycarbonate Housing, Halogen Lamp, Emergency Light Remote Head (Lithonia ELA IND H1212)	119.10	16.92
26 52 13 13-0048	EA	12 Watt, 20 Volt, Heavyweight Polycarbonate Housing, Halogen Lamp, Emergency Light Remote Head (Lithonia ELA IND H2012)	100.75	16.92

26 52 13 13-0049 Outdoor Emergency Lights *(26 52 13 13)*

26 52 13 13-0050 Gasketed Die-Cast Aluminum Housing, Outdoor Emergency Lights *(26 52 13 13-0049)*

Note: Includes nickel-cadmium batteries.

26 52 13 13-0051	EA	10 Max Wattage At 90 Minutes, LED Lamps, Gasketed Aluminum Die-Cast Housing, Outdoor Emergency Light (Dual-Lite PG Series)	720.95	28.20
26 52 13 13-0052	EA	10 Max Wattage At 90 Minutes, LED Lamps, Gasketed Aluminum Die-Cast Housing, Outdoor Emergency Light With Heater (Dual-Lite PG Series)	863.24	28.20

26 52 13 13-0053 Recessed Emergency Lights *(26 52 13 13)*

26 52 13 13-0054	EA	10 Watt At 90 Minutes, 6 Volt, Halogen Lamp, 8" Round, Recessed High-Hat Emergency Light (Lithonia ELRG)	787.81	28.20
		For Wire Guard, Add	*60.00*	
26 52 13 13-0055	EA	16 Max Wattage At 90 Minutes, 6 Volt, 12" x 12" Polycarbonate Housing, Glass Sealed-Beam Lamps, Recessed Emergency Light (Lithonia ELR2)	604.07	56.40
		Note: Includes lead-calcium batteries and two adjustable lamp heads.		
		For Wireguard, Add	*257.45*	
26 52 13 13-0056	EA	50 Max Wattage At 90 Minutes, 12 Volt, 12" x 12" Polycarbonate Housing, Glass Sealed-Beam Lamps, Recessed Emergency Light (Lithonia ELR4)	879.83	56.40
		Note: Includes lead-calcium batteries and two adjustable lamp heads.		
		For Wireguard, Add	*257.45*	

26 52 13 13-0057 Square Wraparound Emergency Lights *(26 52 13 13)*

26 52 13 13-0058	EA	10 Max Wattage At 90 Minutes, 6 Volt, Halogen Lamp, 10-5/16" x 10-5/16" Lexan Frame, Square Wraparound Emergency Light (Lithonia ELSQ)	352.88	28.20

26 52 13 16 Exit Signs *(26 52 13)*

Note: Excludes pendants.

26 52 13 16-0001 LED Exit Signs *(26 52 13 16)*

Note: Includes red LED lamps.

26 52 13 16-0002	EA	Single Face, Thermoplastic Housing, LED Exit Sign (Lithonia LQM-S-W-3-R-120/277-M6)	195.31	41.23
		For Green LED Lamps, Add	*15.00*	
		For >50 To 100, Deduct	*-6.94*	
		For >100 To 250, Deduct	*-11.83*	
		For >250 To 500, Deduct	*-19.53*	
		For >500, Deduct	*-27.24*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 52 13 16-0003	EA	Double Face, Thermoplastic Housing, LED Exit Sign (Lithonia LQM-S-W-3-R-120/277-M6)	195.31	41.23
		For Green LED Lamps, Add	*15.00*	
		For >50 To 100, Deduct	*-6.94*	
		For >100 To 250, Deduct	*-11.83*	
		For >250 To 500, Deduct	*-19.53*	
		For >500, Deduct	*-27.24*	
26 52 13 16-0004	EA	Single Face, Thermoplastic Housing, LED Exit Sign With Battery Back-Up (Lithonia LQM-S-W-3-R-120/277-EL-N-M6)	279.73	41.23
		For Green LED Lamps, Add	*15.00*	
		For Self-Diagnostics, Add	*50.00*	
		For >50 To 100, Deduct	*-9.05*	
		For >100 To 250, Deduct	*-16.05*	
		For >250 To 500, Deduct	*-27.97*	
		For >500, Deduct	*-39.90*	
26 52 13 16-0005	EA	Double Face, Thermoplastic Housing, LED Exit Sign With Battery Back-Up (Lithonia LQM ELN)	279.73	41.23
		For Green LED Lamps, Add	*15.00*	
		For Self-Diagnostics, Add	*50.00*	
		For >50 To 100, Deduct	*-9.05*	
		For >100 To 250, Deduct	*-16.05*	
		For >250 To 500, Deduct	*-27.97*	
		For >500, Deduct	*-39.90*	
26 52 13 16-0006	EA	Single Face, Die-Cast Aluminum Housing, LED Exit Sign (Lithonia LQC-W-1-R)	309.89	41.23
		For Green LED Lamps, Add	*15.00*	
		For >50 To 100, Deduct	*-9.81*	
		For >100 To 250, Deduct	*-17.56*	
		For >250 To 500, Deduct	*-30.99*	
		For >500, Deduct	*-44.42*	
26 52 13 16-0007	EA	Double Face, Die-Cast Aluminum Housing, LED Exit Sign (Lithonia LQC-W-2-R)	353.89	41.23
		For Green LED Lamps, Add	*15.00*	
		For >50 To 100, Deduct	*-10.91*	
		For >100 To 250, Deduct	*-19.76*	
		For >250 To 500, Deduct	*-35.39*	
		For >500, Deduct	*-51.02*	
26 52 13 16-0008	EA	Single Face, Die-Cast Aluminum Housing, LED Exit Sign With Battery Back-Up (Lithonia LQC-W-1-R-EL-N)	291.50	41.23
		For Green LED Lamps, Add	*15.00*	
		For Self-Diagnostics, Add	*50.00*	
		For >50 To 100, Deduct	*-9.35*	
		For >100 To 250, Deduct	*-16.64*	
		For >250 To 500, Deduct	*-29.15*	
		For >500, Deduct	*-41.66*	
26 52 13 16-0009	EA	Double Face, Die-Cast Aluminum Housing, LED Exit Sign With Battery Back-Up (Lithonia LQC-W-2-R-EL-N)	323.44	41.23
		For Green LED Lamps, Add	*15.00*	
		For Self-Diagnostics, Add	*50.00*	
		For >50 To 100, Deduct	*-10.15*	
		For >100 To 250, Deduct	*-18.23*	
		For >250 To 500, Deduct	*-32.34*	
		For >500, Deduct	*-46.45*	
26 52 13 16-0010	EA	Single Face, Thermoplastic Housing, LED Exit Sign/Emergency Light Combo With Battery Back-Up (Lithonia LHQM-S-W-3-R-M4) Note: Includes two circular side mounted krypton emergency lights.	369.43	41.23
		For Green LED Lamps, Add	*15.00*	
		For >50 To 100, Deduct	*-12.06*	
		For >100 To 250, Deduct	*-21.29*	
		For >250 To 500, Deduct	*-36.94*	
		For >500, Deduct	*-52.59*	
26 52 13 16-0011	EA	Single Face, Thermoplastic Housing, LED Exit Sign/Emergency Light Combo With Battery Back-Up (Lithonia LHQM-LED-R-M6) Note: Includes two circular side mounted LED emergency lights.	336.49	41.23
		For Green LED Lamps, Add	*15.00*	
		For >50 To 100, Deduct	*-11.23*	
		For >100 To 250, Deduct	*-19.64*	
		For >250 To 500, Deduct	*-33.65*	
		For >500, Deduct	*-47.65*	
26 52 13 16-0012	EA	Single Face, Powder Coated Steel Housing, LED Exit Sign/Emergency Light Combo With Battery Back-Up (Big Beam COM-PH) Note: Includes two rectangular front mounted high intensity tungsten emergency lights.	469.07	41.23
		For Green LED Lamps, Add	*15.00*	
		For >50 To 100, Deduct	*-14.55*	
		For >100 To 250, Deduct	*-26.27*	
		For >250 To 500, Deduct	*-46.91*	
		For >500, Deduct	*-67.54*	
26 52 13 16-0013	EA	Single Face, Powder Coated Steel Housing, LED Exit Sign/Emergency Light Combo With Battery Back-Up (Big Beam COM) Note: Includes two circular side mounted PAR 36 emergency lights.	492.26	41.23
		For Green LED Lamps, Add	*15.00*	
		For >50 To 100, Deduct	*-15.13*	
		For >100 To 250, Deduct	*-27.43*	
		For >250 To 500, Deduct	*-49.23*	
		For >500, Deduct	*-71.02*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 52 13 16-0014	EA	Double Face, Damp Location, Die-Cast Aluminum Housing, LED Exit Sign With Battery Back-Up (Lithonia LE-S-2-R-120/277-EL-N-SD)	364.40	41.23
		Note: Includes fire alarm flashing interface.		
		For Green LED Lamps, Add	*15.00*	
		For Self-Diagnostics, Add	*50.00*	
		For >50 To 100, Deduct	*-11.17*	
		For >100 To 250, Deduct	*-20.28*	
		For >250 To 500, Deduct	*-36.44*	
		For >500, Deduct	*-52.60*	
26 52 13 16-0015	EA	Single Face, NEMA 4X All-Conditions/Vandal Resistant, Die-Cast Aluminum Housing, LED Exit Sign With Battery Back-Up (Lithonia LV-S-W-1-R-120/277-EL-N)	825.88	41.23
		Note: Includes fire alarm flashing interface.		
		For Green LED Lamps, Add	*15.00*	
		For Self-Diagnostics, Add	*50.00*	
		For >50 To 100, Deduct	*-22.71*	
		For >100 To 250, Deduct	*-43.36*	
		For >250 To 500, Deduct	*-82.59*	
		For >500, Deduct	*-121.82*	
26 52 13 16-0016	EA	Single Face, Polycarbonate Housing, LED Exit Sign With Battery Back-Up (Cooper Sure-Lites LPX)	482.02	41.23
		For >50 To 100, Deduct	*-14.87*	
		For >100 To 250, Deduct	*-26.92*	
		For >250 To 500, Deduct	*-48.20*	
		For >500, Deduct	*-69.48*	
26 52 13 16-0017	EA	Single Or Double Face, Polycarbonate Housing, LED Emergency Exit Sign (Eaton Lighting APX6R)	124.21	41.23
		For >50 To 100, Deduct	*-5.17*	
		For >100 To 250, Deduct	*-8.27*	
		For >250 To 500, Deduct	*-12.42*	
		For >500, Deduct	*-16.57*	
26 52 13 16-0018	EA	120-277 Volt, LED Emergency Exit Sign With Nickel Cadmium Battery, Red (Cooper Industries APX7R)	124.75	41.23
		For >50 To 100, Deduct	*-5.18*	
		For >100 To 250, Deduct	*-8.30*	
		For >250 To 500, Deduct	*-12.48*	
		For >500, Deduct	*-16.65*	

26 52 13 16-0019 Edge-Lit LED Exit Signs *(26 52 13 16)*

Note: Includes red LED lamps.

26 52 13 16-0020	EA	Single Face, Edge-Lit LED Exit Sign (Lithonia EDG-1- R-M6)	274.35	41.23
		For Green LED Lamps, Add	*40.00*	
		For >50 To 100, Deduct	*-8.92*	
		For >100 To 250, Deduct	*-15.78*	
		For >250 To 500, Deduct	*-27.44*	
		For >500, Deduct	*-39.09*	
26 52 13 16-0021	EA	Double Face, Edge-Lit LED Exit Sign (Lithonia EDG-2-R-M6)	277.40	41.23
		For Green LED Lamps, Add	*40.00*	
		For >50 To 100, Deduct	*-9.00*	
		For >100 To 250, Deduct	*-15.93*	
		For >250 To 500, Deduct	*-27.74*	
		For >500, Deduct	*-39.55*	
26 52 13 16-0022	EA	Single Face, Edge-Lit LED Exit Sign With Battery Back-Up (Lithonia EDG-1-R-EL-M6)	298.01	41.23
		For Green LED Lamps, Add	*40.00*	
		For Self-Diagnostics, Add	*50.00*	
		For >50 To 100, Deduct	*-9.51*	
		For >100 To 250, Deduct	*-16.96*	
		For >250 To 500, Deduct	*-29.80*	
		For >500, Deduct	*-42.64*	
26 52 13 16-0023	EA	Double Face, Edge-Lit LED Exit Sign With Battery Back-Up (Lithonia EDG-2-R-EL-M6)	359.61	41.23
		For Green LED Lamps, Add	*40.00*	
		For Self-Diagnostics, Add	*50.00*	
		For >50 To 100, Deduct	*-11.05*	
		For >100 To 250, Deduct	*-20.04*	
		For >250 To 500, Deduct	*-35.96*	
		For >500, Deduct	*-51.88*	

26 52 13 16-0024 Self-Luminous Tritium Exit Signs *(26 52 13 16)*

Note: Includes red or green tritium filled pyrex glass light tubes with phosphor coating.

26 52 13 16-0025	EA	10 Year, Single Face, Acrylonitrile Butadiene Styrene (ABS) Housing, Self-Luminous Tritium Exit Sign (Isolite SLX-60-S-10-R)	604.73	41.23
		For >50 To 100, Deduct	*-17.18*	
		For >100 To 250, Deduct	*-32.30*	
		For >250 To 500, Deduct	*-60.47*	
		For >500, Deduct	*-88.65*	
26 52 13 16-0026	EA	10 Year, Double Face, Acrylonitrile Butadiene Styrene (ABS) Housing, Self-Luminous Tritium Exit Sign (Isolite SLX-60-D-10-R)	1,126.44	41.23
		For >50 To 100, Deduct	*-30.22*	
		For >100 To 250, Deduct	*-58.38*	
		For >250 To 500, Deduct	*-112.64*	
		For >500, Deduct	*-166.90*	
26 52 13 16-0027	EA	20 Year, Single Face, Acrylonitrile Butadiene Styrene (ABS) Housing, Self-Luminous Tritium Exit Sign (Isolite SLX-60-S-20-R)	723.58	41.23
		For >50 To 100, Deduct	*-20.15*	
		For >100 To 250, Deduct	*-38.24*	
		For >250 To 500, Deduct	*-72.36*	
		For >500, Deduct	*-106.48*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 52 13 16-0028	EA	20 Year, Double Face, Acrylonitrile Butadiene Styrene (ABS) Housing, Self-Luminous Tritium Exit Sign (Isolite SLX-60-D-20-R)	1,221.85	41.23
		For >50 To 100, Deduct	*-32.61*	
		For >100 To 250, Deduct	*-63.15*	
		For >250 To 500, Deduct	*-122.19*	
		For >500, Deduct	*-181.22*	
26 52 13 16-0029	EA	10 Year, Single Face, Aluminum Housing, Self-Luminous Tritium Exit Sign (Isolite 2040-01-10-R)	663.87	41.23
		For >50 To 100, Deduct	*-18.66*	
		For >100 To 250, Deduct	*-35.26*	
		For >250 To 500, Deduct	*-66.39*	
		For >500, Deduct	*-97.52*	
26 52 13 16-0030	EA	10 Year, Double Face, Aluminum Housing, Self-Luminous Tritium Exit Sign (Isolite 2040-07-10-R)	1,221.85	41.23
		For >50 To 100, Deduct	*-32.61*	
		For >100 To 250, Deduct	*-63.15*	
		For >250 To 500, Deduct	*-122.19*	
		For >500, Deduct	*-181.22*	
26 52 13 16-0031	EA	20 Year, Single Face, Aluminum Housing, Self-Luminous Tritium Exit Sign (Isolite 2040-01-20-R)	818.43	41.23
		For >50 To 100, Deduct	*-22.52*	
		For >100 To 250, Deduct	*-42.98*	
		For >250 To 500, Deduct	*-81.84*	
		For >500, Deduct	*-120.70*	
26 52 13 16-0032	EA	20 Year, Double Face, Aluminum Housing, Self-Luminous Tritium Exit Sign (Isolite 2040-07-20-R)	1,520.93	41.23
		For >50 To 100, Deduct	*-40.08*	
		For >100 To 250, Deduct	*-78.11*	
		For >250 To 500, Deduct	*-152.09*	
		For >500, Deduct	*-226.08*	

26 52 13 16-0033 Vandal-Resistant LED Exit Signs *(26 52 13 16)*

Note: Includes red LED lamps.

26 52 13 16-0034	EA	Single Face, Aluminum Housing, Vandal-Resistant/Wet Location, LED Exit Sign (Lithonia LV-S-W-1-R-120/277)	569.57	41.23
		For >50 To 100, Deduct	*-16.30*	
		For >100 To 250, Deduct	*-30.54*	
		For >250 To 500, Deduct	*-56.96*	
		For >500, Deduct	*-83.37*	
26 52 13 16-0035	EA	Single Face, Aluminum Housing, Vandal-Resistant/Wet Location, LED Exit Sign With Battery Backup (Lithonia LV-S-W-1-R-120/277-EL-N)	892.64	41.23
		For >50 To 100, Deduct	*-24.38*	
		For >100 To 250, Deduct	*-46.69*	
		For >250 To 500, Deduct	*-89.26*	
		For >500, Deduct	*-131.83*	
26 52 13 16-0036	EA	Single Face, Aluminum Housing, NEMA 4X, Vandal-Resistant/Wet Location, LED Exit Sign With Battery Backup (Lithonia LV-S-1-R-120/277-EL-N-UM-4X)	1,090.73	41.23
		For >50 To 100, Deduct	*-29.33*	
		For >100 To 250, Deduct	*-56.60*	
		For >250 To 500, Deduct	*-109.07*	
		For >500, Deduct	*-161.55*	

26 52 13 16-0037 Removal And Reinstallation Of Exit Light Fixture *(26 52 13 16)*

26 52 13 16-0038	EA	Removal And Reinstall Of Exit Light Fixtures Note: Includes storage and cleaning.	84.60	
		For >50 To 100, Deduct	*-4.23*	
		For >100 To 250, Deduct	*-6.35*	
		For >250 To 500, Deduct	*-8.46*	
		For >500, Deduct	*-10.58*	

26 52 13 16-0039 Exit Sign Accessories *(26 52 13 16)*

26 52 13 16-0040	EA	Polycarbonate Vandal Shield For Exit Signs (Radiant-Lite BG-1)	134.17	11.30
		For >50 To 100, Deduct	*-3.92*	
		For >100 To 250, Deduct	*-7.27*	
		For >250 To 500, Deduct	*-13.42*	
		For >500, Deduct	*-19.56*	
26 52 13 16-0041	EA	Wire Guard For Exit Signs Or Emergency Lights (Best Lighting Products WG-1)	76.42	11.30
		For >50 To 100, Deduct	*-2.48*	
		For >100 To 250, Deduct	*-4.39*	
		For >250 To 500, Deduct	*-7.64*	
		For >500, Deduct	*-10.90*	
26 52 13 16-0042	EA	Wire Guard For Combination Exit Sign And Emergency Light (Best Lighting Products WG-3)	125.73	9.04
		For >50 To 100, Deduct	*-3.60*	
		For >100 To 250, Deduct	*-6.74*	
		For >250 To 500, Deduct	*-12.57*	
		For >500, Deduct	*-18.41*	
26 52 13 16-0043	EA	Removal And Replacement Of Battery For Exit Signs Note: Battery: nickel cadmium, 1.2 volt, 1 Ah battery capacity	133.03	
		For >50 To 100, Deduct	*-4.03*	
		For >100 To 250, Deduct	*-7.36*	
		For >250 To 500, Deduct	*-13.30*	
		For >500, Deduct	*-19.25*	

26 54 Classified Location Lighting *(26 50)*

26 54 13 Incandescent Classified Location Lighting *(26 54)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 54 13 00-0001		**Class II Division I, Explosion Proof Fixtures** *(26 54 13)*		
26 54 13 00-0002	EA	200 Watt Incandescent, Pendant Mounted, Class II Division I, Explosion Proof Fixture Without Reflector And Guard	348.94	147.05
26 54 13 00-0003	EA	200 Watt Incandescent, Ceiling Mounted, Class II Division I, Explosion Proof Fixture Without Reflector And Guard	354.11	147.05
26 54 13 00-0004	EA	200 Watt Incandescent, Bracket Mounted, Class II Division I, Explosion Proof Fixture Without Reflector And Guard	404.33	147.05
26 54 13 00-0005	EA	200 Watt Incandescent, Pendant Mounted, Class II Division I, Explosion Proof Fixture With Standard Dome Reflector	387.20	147.05
26 54 13 00-0006	EA	200 Watt Incandescent, Ceiling Mounted, Class II Division I, Explosion Proof Fixture With Standard Dome Reflector	394.89	147.05
26 54 13 00-0007	EA	200 Watt Incandescent, Bracket Mounted, Class II Division I, Explosion Proof Fixture With Standard Dome Reflector	450.27	147.05
26 54 13 00-0008		**Class I, Division I, Hazardous Location Fixtures** *(26 54 13)*		
26 54 13 00-0009		**Class I Division I Fixtures Accessories** *(26 54 13 00-0008)*		
26 54 13 00-0010	EA	Appleton AALB-75, Long Mounting Hood	158.38	15.66
26 54 13 00-0011	EA	Appleton AAC-75, Ceiling Mounting Hood	116.08	15.66
26 54 13 00-0012	EA	Appleton AAP-75, Pendent Mounting Hood	59.95	15.66
26 54 13 00-0013	EA	Appleton AAGU-1, Aluminum Lens Guard	34.29	6.29
26 54 13 00-0014	EA	Flexible Hanger Coupling (Appleton #EXJF28)	191.30	15.66
26 54 13 00-0015	EA	Conduit Outlet Box (Appleton #GRUE75-A)	67.03	15.66
26 54 13 00-0016	EA	Rigid Fixture Hanger (Appleton #CPU20-75)	94.20	15.66
26 54 13 00-0017	EA	150 Watt High Intensity Discharge (HID) Fixture, Appleton KPBU150L-MT	1,290.36	132.01
26 54 13 00-0018	EA	Appleton KPA-75, Pendant Mounting Hood	105.22	15.66
26 54 13 00-0019	EA	Appleton KPC-75, Ceiling Mounting Hood	104.66	15.66
26 54 13 00-0020		**Exit And Emergency Fixtures, Battery Powered, Class I Division I** *(26 54 13 00-0008)*		
		Note: Includes fixtures, batteries, directional heads and accessories.		
26 54 13 00-0021	EA	Halogen /HIT 12 Volt/25 Watt Pendant Mount Fixture For Use With Battery Unit (Remote Or Local), Class I Division I (Emergi-Lite EFEP)	1,973.08	96.50
		For Ceiling Mounted, Deduct	*-35.68*	
		For Wall Mounted, Deduct	*-95.13*	
		For Globe Guard, Add	*107.04*	
		For Dome Reflector, Add	*225.98*	
		For Dome Angle Reflector, Add	*225.98*	
26 54 13 00-0022	EA	Incandescent/Halogen/HIT 12 Volt/25 Watt Pendant Mount Exit Light Fixture For Use With Battery Unit (Remote Or Local), Single Face, Class I Division I (Emergi-Lite EFXP)	2,421.75	96.50
		For Ceiling Mounted, Deduct	*-35.68*	
		For Wall Mounted, Deduct	*-95.13*	
26 54 13 00-0023	EA	12 Volt / 36 Watt Hazardous Area Emergency Unit, Including Nickel Cadmium Battery/Transformer/Charger/Vent/Drain, Class I Division I (Emergi-Lite EXC)	5,693.42	96.50
26 54 13 00-0024	EA	12 Volt / 50 Watt Hazardous Area Emergency Unit, Including Nickel Cadmium Battery/Transformer/Charger/Vent/Drain, Class I Division I (Emergi-Lite EXC)	5,699.08	99.89
26 54 13 00-0025	EA	12 Volt / 72 Watt Hazardous Area Emergency Unit, Including Nickel Cadmium Battery/Transformer/Charger/Vent/Drain, Class I Division I (Emergi-Lite EXC)	5,704.71	103.40
26 54 13 00-0026		**Pendant Mounted Codemaster Jr** *(26 54 13 00-0008)*		
		Note: With globe glass, Class I, Division I.		
26 54 13 00-0027	EA	50 Watt High Pressure Sodium Fixture, Pendant Mounted, With Globe Glass, Class I, Division I (Appleton Codemaster Jr.)	1,601.19	97.90
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0028	EA	70 Watt High Pressure Sodium Fixture, Pendant Mounted, With Globe Glass, Class I, Division I (Appleton Codemaster Jr.)	1,635.07	100.47
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0029	EA	100 Watt High Pressure Sodium Fixture, Pendant Mounted, With Globe Glass, Class I, Division I (Appleton Codemaster Jr.)	1,670.18	107.17
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0030	EA	150 Watt High Pressure Sodium Fixture, Pendant Mounted, With Globe Glass, Class I, Division I (Appleton Codemaster Jr.)	1,710.25	113.87
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0031	EA	50 Watt Metal Halide Fixture, Pendant Mounted, With Globe Glass, Class I, Division I (Appleton Codemaster Jr.)	1,382.96	97.90
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0032	EA	70 Watt Metal Halide Fixture, Pendant Mounted, With Globe Glass, Class I, Division I (Appleton Codemaster Jr.)	1,399.48	100.47
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0033	EA	100 Watt Metal Halide Fixture, Pendant Mounted, With Globe Glass, Class I, Division I (Appleton Codemaster Jr.)	1,533.78	107.17
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 54 13 00-0034	EA	175 Watt Pulse Start Metal Halide (PSMH) Reactor, Pendant Mount With Globe Glass, Class I, Division I (Appleton Codemaster Jr.)	1,720.56	120.57
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	

26 54 13 00-0035 Accessories For Pendant Mounted Codemaster Jr *(26 54 13 00-0008)*

Note: Class I, Division I.

26 54 13 00-0036	EA	Globe Guard For Up To 175 Watt, Code Master Jr.	59.52	
26 54 13 00-0037	EA	Globe Reflector, Code Master Jr.	101.68	
26 54 13 00-0038	EA	Angle Globe Reflector, Code Master Jr.	96.72	

26 54 13 00-0039 Pendant Mounted Codemaster 2 *(26 54 13 00-0008)*

Note: With globe glass, Class I, Division I.

26 54 13 00-0040	EA	50 Watt High Pressure Sodium Fixture, Pendant Mounted, With Globe Glass, Class I, Division I (Appleton Codemaster2)	1,826.86	97.90
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0041	EA	70 Watt High Pressure Sodium Fixture, Pendant Mounted, With Globe Glass, Class I, Division I (Appleton Codemaster2)	1,868.18	100.47
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0042	EA	100 Watt High Pressure Sodium Fixture, Pendant Mounted, With Globe Glass, Class I, Division I (Appleton Codemaster2)	1,942.97	107.17
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0043	EA	150 Watt High Pressure Sodium Fixture, Pendant Mounted, With Globe Glass, Class I, Division I (Appleton Codemaster2)	2,012.80	113.87
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0044	EA	250 Watt High Pressure Sodium Fixture, Pendant Mounted, With Globe Glass, Class I, Division I (Appleton Codemaster2)	2,242.10	133.97
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0045	EA	400 Watt High Pressure Sodium Fixture, Pendant Mounted, With Globe Glass, Class I, Division I (Appleton Codemaster2)	2,599.97	147.36
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0046	EA	175 Watt Pulse Start Metal Halide (PSMH) Reactor, Pendant Mounted, With Globe Glass, Class I, Division I (Appleton CodeMaster2)	2,023.11	120.57
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0047	EA	250 Watt Pulse Start Metal Halide (PSMH) Reactor, Pendant Mount, With Globe Glass, Class I, Division I (Appleton CodeMaster2)	2,242.10	133.97
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0048	EA	400 Watt Pulse Start Metal Halide (PSMH) Reactor, Pendant Mount, With Globe Glass, Class I, Division I (Appleton CodeMaster2)	2,599.97	147.36
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	

26 54 13 00-0049 Accessories For Pendant Mounted Codemaster 2 *(26 54 13 00-0008)*

Note: Class I, Division I.

26 54 13 00-0050	EA	Globe Guard For Up To 175 Watt, Code Master 2	59.52	
26 54 13 00-0051	EA	Globe Guard For 250 To 400 Watt, Code Master 2	91.76	
26 54 13 00-0052	EA	Globe Reflector, Code Master 2	136.39	
26 54 13 00-0053	EA	Angle Globe Reflector, Code Master 2	136.39	

26 54 13 00-0054 Pendant Mounted Crouse-Hinds, EVM Series *(26 54 13 00-0008)*

Note: With globe glass, Class I, Division I.

26 54 13 00-0055	EA	50 Watt High Pressure Sodium Fixture, Pendant Mounted, With Globe Glass, Class I, Division I (Crouse-Hinds EVM)	1,469.37	97.90
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0056	EA	70 Watt High Pressure Sodium Fixture, Pendant Mounted, With Globe Glass, Class I, Division I (Crouse-Hinds EVM)	1,496.06	100.47
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 54 13 00-0057	EA	100 Watt High Pressure Sodium Fixture, Pendant Mounted, With Globe Glass, Class I, Division I (Crouse-Hinds EVM)	1,546.69	107.17
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0058	EA	150 Watt High Pressure Sodium Fixture, Pendant Mounted, With Globe Glass, Class I, Division I (Crouse-Hinds EVM)	1,619.86	113.87
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0059	EA	200 Watt High Pressure Sodium Fixture, Pendant Mounted, With Globe Glass, Class I, Division I (Crouse-Hinds EVM)	1,705.47	127.27
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0060	EA	250 Watt High Pressure Sodium Fixture, Pendant Mounted, With Globe Glass, Class I, Division I (Crouse-Hinds EVM)	1,803.93	133.97
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0061	EA	400 Watt High Pressure Sodium Fixture, Pendant Mounted, With Globe Glass, Class I, Division I (Crouse-Hinds EVM)	2,072.86	147.36
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0062	EA	70 Watt Metal Halide Fixture, Pendant Mounted, With Globe Glass, Class I, Division I (Crouse-Hinds EVM)	1,346.47	100.47
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0063	EA	100 Watt Metal Halide Fixture, Pendant Mounted, With Globe Glass, Class I, Division I (Crouse-Hinds EVM)	1,393.84	107.17
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0064	EA	175 Watt Metal Halide Fixture, Pendant Mounted, With Globe Glass, Class I, Division I (Crouse-Hinds EVM)	1,420.61	120.57
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0065	EA	250 Watt Metal Halide Fixture, Pendant Mounted, With Globe Glass, Class I, Division I (Crouse-Hinds EVM)	1,779.82	133.97
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0066	EA	400 Watt Metal Halide Fixture, Pendant Mounted, With Globe Glass, Class I, Division I (Crouse-Hinds EVM)	1,895.52	147.36
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	

26 54 13 00-0067 Accessories For Pendant Mounted Crouse-Hinds, EVM Series *(26 54 13 00-0008)*

Note: Class I, Division I.

26 54 13 00-0068	EA	Globe Guard For Up To 175 Watt Crouse-Hinds - EVM	48.21
26 54 13 00-0069	EA	Globe Guard For 250 To 400 Watt Crouse-Hinds - EVM	75.70
26 54 13 00-0070	EA	Dome Reflector, Crouse-Hinds - EVM	113.01
26 54 13 00-0071	EA	Angle Reflector, Crouse-Hinds - EVM	113.01

26 54 13 00-0072 Pendant Mounted Crouse-Hinds, EVLP Series *(26 54 13 00-0008)*

Note: With globe glass, Class I, Division I.

26 54 13 00-0073	EA	50 Watt High Pressure Sodium Fixture, Pendant Mount, With Globe Glass, Class I, Division I (Crouse-Hinds EVLP)	853.95	97.90
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0074	EA	70 Watt High Pressure Sodium Fixture, Pendant Mount, With Globe Glass, Class I, Division I (Crouse-Hinds EVLP)	821.12	100.47
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0075	EA	100 Watt High Pressure Sodium Fixture, Pendant Mount, With Globe Glass, Class I, Division I (Crouse-Hinds EVLP)	942.80	107.17
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0076	EA	150 Watt High Pressure Sodium Fixture, Pendant Mount, With Globe Glass, Class I, Division I (Crouse-Hinds EVLP)	1,105.69	113.87
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0077	EA	200 Watt High Pressure Sodium Fixture, Pendant Mount, With Globe Glass, Class I, Division I, Crouse-Hinds EVLP	1,168.14	127.27
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 54 13 00-0078	EA	250 Watt High Pressure Sodium Fixture, Pendant Mount, With Globe Glass, Class I, Division I (Crouse-Hinds EVLP)	1,236.39	133.97
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0079	EA	400 Watt High Pressure Sodium Fixture, Pendant Mount, With Globe Glass, Class I, Division I (Crouse-Hinds EVLP)	1,414.56	147.36
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0080	EA	70 Watt Metal Halide Fixture, Pendant Mount, With Globe Glass, Class I, Division I (Crouse-Hinds EVLP)	842.77	100.47
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0081	EA	100 Watt Metal Halide Fixture, Pendant Mount, With Globe Glass, Class I, Division I (Crouse-Hinds EVLP)	910.80	107.17
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0082	EA	175 Watt Metal Halide Fixture, Pendant Mount, With Globe Glass, Class I, Division I (Crouse-Hinds EVLP)	940.04	120.57
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0083	EA	100 Watt Pulse Start Metal Halide Fixture, Pendant Mount, With Globe Glass, Class I, Division I (Crouse-Hinds EVLP)	963.46	107.17
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0084	EA	175 Watt Pulse Start Metal Halide Fixture, Pendant Mount, With Globe Glass, Class I, Division I (Crouse-Hinds EVLP)	993.30	120.57
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0085	EA	250 Watt Pulse Start Metal Halide Fixture, Pendant Mount, With Globe Glass, Class I, Division I (Crouse-Hinds EVLP)	1,391.85	133.97
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0086	EA	400 Watt Pulse Start Metal Halide Fixture, Pendant Mount, With Globe Glass, Class I, Division I (Crouse-Hinds EVLP)	1,392.52	147.36
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	

26 54 13 00-0087 Accessories For Pendant Mounted Crouse-Hinds, EVLP Series *(26 54 13 00-0008)*

Note: Class I, Division I.

26 54 13 00-0088	EA	Globe Guard For Up To 175 Watt Crouse-Hinds - EVLP	48.21
26 54 13 00-0089	EA	Globe Guard For 250 To 400 Watt Crouse-Hinds - EVLP	75.70
26 54 13 00-0090	EA	Dome Reflector, Crouse-Hinds - EVLP	113.01
26 54 13 00-0091	EA	Angle Reflector, Crouse-Hinds - EVLP	113.01

26 54 13 00-0092 Class I, Division II, Hazardous Location Fixtures *(26 54 13)*

26 54 13 00-0093 Pendant Mount Mercmaster III *(26 54 13 00-0092)*

Note: With globe, Class I Division II.

26 54 13 00-0094	EA	50 Watt High Pressure Sodium Fixture, Pendant Mount, With Globe Glass, Class I Division II (Appleton Mercmaster III)	942.67	97.90
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0095	EA	70 Watt High Pressure Sodium Fixture, Pendant Mount, With Globe Glass, Class I Division II (Appleton Mercmaster III)	1,041.41	100.47
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0096	EA	100 Watt High Pressure Sodium Fixture, Pendant Mount, With Globe Glass, Class I Division II (Appleton Mercmaster III)	1,096.05	107.17
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0097	EA	150 Watt High Pressure Sodium Fixture, Pendant Mount, With Globe Glass, Class I Division II (Appleton Mercmaster III)	1,121.81	113.87
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0098	EA	250 Watt High Pressure Sodium Fixture, Pendant Mount, With Globe Glass, Class I Division II (Appleton Mercmaster III)	1,434.13	133.97
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0099	EA	400 Watt High Pressure Sodium Fixture, Pendant Mount, With Globe Glass, Class I Division II (Appleton Mercmaster III)	1,666.41	147.36
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 54 13 00-0100	EA	100 Watt Metal Halide Fixture, Pendant Mount, With Globe Glass, Class I Division II (Appleton Mercmaster III)	916.42	107.17
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0101	EA	175 Watt Metal Halide Fixture, Pendant Mount, With Globe Glass, Class I Division II (Appleton Mercmaster III)	943.24	120.57
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0102	EA	250 Watt Metal Halide Fixture, Pendant Mount, With Globe Glass, Class I Division II (Appleton Mercmaster III)	1,387.86	133.97
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0103	EA	400 Watt Metal Halide Fixture, Pendant Mount, With Globe Glass, Class I Division II (Appleton Mercmaster III)	1,617.34	147.36
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0104	EA	175 Watt Pulse Start Metal Halide Fixture, Pendant Mount, With Globe Glass, Class I Division II (Appleton Mercmaster III)	1,308.75	120.57
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0105	EA	250 Watt Pulse Start Metal Halide Fixture, Pendant Mount, With Globe Glass, Class I Division II (Appleton Mercmaster III)	1,660.52	133.97
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0106	EA	400 Watt Pulse Start Metal Halide Fixture, Pendant Mount, With Globe Glass, Class I Division II (Appleton Mercmaster III)	1,932.37	147.36
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0107		**Pendant Mount Mercmaster III Low Profile** *(26 54 13 00-0092)*		
		Note: With globe, Class I Division II.		
26 54 13 00-0108	EA	35 Watt High Pressure Sodium Fixture, Pendant Mount, With Globe Glass, Class I Division II (Appleton Mercmaster III Low Profile)	619.92	93.78
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0109	EA	50 Watt High Pressure Sodium Fixture, Pendant Mount, With Globe Glass, Class I Division II (Appleton Mercmaster III Low Profile)	638.85	97.90
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0110	EA	70 Watt High Pressure Sodium Fixture, Pendant Mount, With Globe Glass, Class I Division II (Appleton Mercmaster III Low Profile)	698.73	100.47
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0111	EA	100 Watt High Pressure Sodium Fixture, Pendant Mount, With Globe Glass, Class I Division II (Appleton Mercmaster III Low Profile)	738.69	107.17
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0112	EA	150 Watt High Pressure Sodium Fixture, Pendant Mount, With Globe Glass, Class I Division II (Appleton Mercmaster III Low Profile)	805.07	113.87
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0113	EA	50 Watt Metal Halide Fixture, Pendant Mount, With Globe Glass, Class I Division II (Appleton Mercmaster III Low Profile)	652.55	97.90
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0114	EA	70 Watt Metal Halide Fixture, Pendant Mount, With Globe Glass, Class I Division II (Appleton Mercmaster III Low Profile)	688.45	100.47
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0115	EA	100 Watt Metal Halide Fixture, Pendant Mount, With Globe Glass, Class I Division II (Appleton Mercmaster III Low Profile)	747.98	107.17
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0116	EA	175 Watt Metal Halide Fixture, Pendant Mount, With Globe Glass, Class I Division II (Appleton Mercmaster III Low Profile)	943.05	120.57
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0117		**Accessories For Mercmaster III And Mercmaster III Low Profile** *(26 54 13 00-0092)*		
26 54 13 00-0118	EA	Cone-Type Pendent, Mercmaster III And Mercmaster III Low Profile	92.93	
26 54 13 00-0119	EA	Globe Guard For Mercmaster III And Mercmaster III Low Profile Note: 50 to 250 Watt.	46.47	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 54 13 00-0120	EA	Globe Guard For Mercmaster III And Mercmaster III Low Profile Note: 400 Watt.	197.41	
26 54 13 00-0121	EA	Dome Reflector For Mercmaster III And Mercmaster III Low Profile Note: 50 to 250 Watt.	69.55	
26 54 13 00-0122	EA	Dome Reflector For Mercmaster III And Mercmaster III Low Profile Note: 400 Watt.	113.01	
26 54 13 00-0123	EA	Angle Reflector For Mercmaster III And Mercmaster III Low Profile For 50 To 250 Watt	78.42	
26 54 13 00-0124	EA	Angle Reflector For Mercmaster III And Mercmaster III Low Profile For 400 Watt	113.01	
26 54 13 00-0125	EA	Refractor Guard, Mercmaster	67.13	
26 54 13 00-0126	EA	Dome And Angle Refractor, Mercmaster	113.01	
26 54 13 00-0127	EA	Refractor Glass Mercmaster Up To 100 Watt	151.78	
26 54 13 00-0128	EA	Refractor Glass Mercmaster 175 Watt	151.98	
26 54 13 00-0129	EA	Refractor Glass Up To 250 Watt Metal Halide, Mercmaster	151.78	
26 54 13 00-0130	EA	Refractor Glass For 250 To 400 Watt HPS And 400 Watt Metal Halide Note: Mercmaster.	78.11	
26 54 13 00-0131	EA	Refractor Guard Up To 250 Watt Metal Halide, Mercmaster	67.13	
26 54 13 00-0132	EA	Refractor Guard For 250 To 400 Watt HPS And 400 Watt Metal Halide Note: Mercmaster.	86.03	
26 54 13 00-0133	EA	Reflector / Refractor For Mercmaster III	113.01	
26 54 13 00-0134	EA	Appleton KPWB-75, Wall Mount	190.01	15.66
26 54 13 00-0135	EA	Appleton KGU2, Aluminum Lens Guard	79.60	6.29

26 54 13 00-0136 Pendant Mount Crouse-Hinds EV Series *(26 54 13 00-0092)*

Note: With globe, Class I Division II.

26 54 13 00-0137	EA	100 Watt High Pressure Sodium Fixture, Pendant Mount, With Globe Glass, Class I Division II (Crouse-Hinds EV)	1,096.23	107.17
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0138	EA	150 Watt High Pressure Sodium Fixture, Pendant Mount, With Globe Glass, Class I Division II (Crouse-Hinds EV)	1,146.31	113.87
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0139	EA	250 Watt High Pressure Sodium Fixture, Pendant Mount, With Globe Glass, Class I Division II (Crouse-Hinds EV)	1,320.13	133.97
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0140	EA	70 Watt Metal Halide Fixture, Pendant Mount, With Globe Glass, Class I Division II (Crouse-Hinds EV)	981.37	100.47
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0141	EA	100 Watt Metal Halide Fixture, Pendant Mount, With Globe Glass, Class I Division II (Crouse-Hinds EV)	1,058.83	107.17
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0142	EA	175 Watt Metal Halide Fixture, Pendant Mount, With Globe Glass, Class I Division II (Crouse-Hinds EV)	1,095.41	120.57
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0143	EA	250 Watt Metal Halide Fixture, Pendant Mount, With Globe Glass, Class I Division II (Crouse-Hinds EV)	1,198.83	133.97
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0144	EA	400 Watt Metal Halide Fixture, Pendant Mount, With Globe Glass, Class I Division II (Crouse-Hinds EV)	1,348.26	147.36
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	

26 54 13 00-0145 Pendant Mount VMV Champ Series *(26 54 13 00-0092)*

Note: With globe, Class I Division II.

26 54 13 00-0146	EA	50 Watt High Pressure Sodium Fixture, Pendant Mount, With Globe Glass, Class I Division II (Crouse-Hinds VMV)	987.31	97.90
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0147	EA	70 Watt High Pressure Sodium Fixture, Pendant Mount, With Globe Glass, Class I Division II (Crouse-Hinds VMV)	974.31	100.47
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0148	EA	100 Watt High Pressure Sodium Fixture, Pendant Mount, With Globe Glass, Class I Division II (Crouse-Hinds VMV)	1,002.89	107.17
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0149	EA	150 Watt High Pressure Sodium Fixture, Pendant Mount, With Globe Glass, Class I Division II (Crouse-Hinds VMV)	1,052.71	113.87
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 54 13 00-0150	EA	200 Watt High Pressure Sodium Fixture, Pendant Mount, With Globe Glass, Class I Division II (Crouse-Hinds VMV)	1,300.24	127.27
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0151	EA	250 Watt High Pressure Sodium Fixture, Pendant Mount, With Globe Glass, Class I Division II (Crouse-Hinds VMV)	1,508.90	133.97
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0152	EA	400 Watt High Pressure Sodium Fixture, Pendant Mount, With Globe Glass, Class I Division II (Crouse-Hinds VMV)	1,529.51	147.36
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0153	EA	70 Watt Metal Halide Fixture, Pendant Mount, With Globe Glass, Class I Division II (Crouse-Hinds VMV)	806.83	100.47
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0154	EA	100 Watt Metal Halide Fixture, Pendant Mount, With Globe Glass, Class I Division II (Crouse-Hinds VMV)	839.49	107.17
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0155	EA	175 Watt Metal Halide Fixture, Pendant Mount, With Globe Glass, Class I Division II (Crouse-Hinds VMV)	882.03	120.57
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0156	EA	250 Watt Metal Halide Fixture, Pendant Mount, With Globe Glass, Class I Division II (Crouse-Hinds VMV)	1,367.00	133.97
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0157	EA	400 Watt Metal Halide Fixture, Pendant Mount, With Globe Glass, Class I Division II (Crouse-Hinds VMV)	1,904.82	147.36
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0158		Pendant Mount DMV Champ Series *(26 54 13 00-0092)*		
		Note: With globe, Class I Division II.		
26 54 13 00-0159	EA	70 Watt High Pressure Sodium Fixture, Pendant Mount, With Globe Glass, Class I Division II (Crouse-Hinds DMV)	700.51	100.47
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0160	EA	100 Watt High Pressure Sodium Fixture, Pendant Mount With Globe Glass, Class I Division II (Crouse-Hinds DMV)	722.35	107.17
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0161	EA	100 Watt Metal Halide Fixture, Pendant Mount With Globe Glass, Class I Division II (Crouse-Hinds DMV)	627.84	107.17
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	
26 54 13 00-0162	EA	175 Watt Metal Halide Fixture, Pendant Mount, With Globe Glass, Class I Division II (Crouse-Hinds DMV)	712.97	113.87
		For Ceiling Mounted, Add	*26.97*	
		For Wall Mounted, Add	*57.60*	
		For Stanchion Mounted, Add	*45.36*	

26 54 16 Fluorescent Classified Location Lighting *(26 54)*

26 54 16 00-0001		Class I Division I, Explosion Proof Fixtures *(26 54 16)*		
		Note: Pendant or ceiling mount.		
26 54 16 00-0002	EA	2 - 40 Watt 430mA Fluorescent Lamps, 4' Length, Pendant Mount, Class I Division I, Explosion Proof Fixture	6,209.69	171.58
26 54 16 00-0003	EA	4 - 60 Watt 8000mA Fluorescent Lamps, 4' Length, Pendant Mount, Class I Division I, Explosion Proof Fixture	11,328.29	171.48
26 54 16 00-0004		Class I, Division I, Hazardous Location Fixtures *(26 54 16)*		
26 54 16 00-0005		4' Fluorescent Pendant Mount, Class I Division I *(26 54 16 00-0004)*		
26 54 16 00-0006	EA	4' Fluorescent Fixture, 40W Rapid Start (Appleton #ARS240-118ESB)	5,031.62	132.01
26 54 16 00-0007	EA	4' Fluorescent Fixture, 40 Watt Biaxial Combination (Appleton #APL240-120)	3,231.88	132.01
26 54 16 00-0008	EA	4' Fluorescent Fixture, 60W Rapid Start (Appleton #AH260-118)	6,036.77	132.01
26 54 16 00-0009		Class I, Division II, Hazardous Location Fixtures *(26 54 16)*		
26 54 16 00-0010		4' Industrial Fluorescent *(26 54 16 00-0009)*		
		Note: Class I Division II.		
26 54 16 00-0011		Day-Brite Dust Tite, 4' Industrial Fluorescent *(26 54 16 00-0010)*		
		Note: Class I, Division II. Tempered glass lens.		
26 54 16 00-0012	EA	Two T8 Lamps, 4' Dust Tite Industrial Fluorescent Fixture Class I, Division II, Day-Brite Dust Tite	1,185.94	132.01
		For Porcelain Enamel Coating For Body And Door, Add	*30.62*	
26 54 16 00-0013	EA	Three T8 Lamps, 4' Dust Tite Industrial Fluorescent Fixture Class I, Division II, Day-Brite Dust Tite	1,248.94	132.01
		For Porcelain Enamel Coating For Body And Door, Add	*30.62*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 54 16 00-0014	EA	Two T12 Lamps, 4' Dust Tite Industrial Fluorescent Fixture Class I, Division II, Day-Brite Dust Tite	1,154.63	132.01
		For Porcelain Enamel Coating For Body And Door, Add	*30.62*	
26 54 16 00-0015	EA	Three T12 Lamps, 4' Dust Tite Industrial Fluorescent Fixture Class I, Division II, Day-Brite Dust Tite	1,216.74	132.01
		For Porcelain Enamel Coating For Body And Door, Add	*30.62*	
26 54 16 00-0016	EA	High Output Ballast With Two T12 Lamps, 4' Dust Tite Industrial Fluorescent Fixture, Class I, Division II, Day-Brite Dust Tite	1,295.61	132.01
		For Porcelain Enamel Coating For Body And Door, Add	*30.62*	
26 54 16 00-0017	EA	High Output Ballast With Three T12 Lamps, 4' Dust Tite Industrial Fluorescent Fixture, Class I, Division II, Day-Brite Dust Tite	1,541.14	132.01
		For Porcelain Enamel Coating For Body And Door, Add	*30.62*	
26 54 16 00-0018		Appleton Non-Metallic Body, FV Series 4' Industrial Fluorescent *(26 54 16 00-0010)*		
		Note: Class I, Division II. Polycarbonate lens.		
26 54 16 00-0019	EA	Two T8 Lamps, 4' Industrial Fluorescent Fixture, Non-Metallic Class I, Division II, Appleton Non-Metallic Body, FV Series	1,330.06	132.01
26 54 16 00-0020	EA	Three T8 Lamps, 4' Industrial Fluorescent Fixture, Non-Metallic Class I, Division II, Appleton Non-Metallic Body, FV Series	1,394.40	132.01
26 54 16 00-0021	EA	Two T12 Lamps, 4' Industrial Fluorescent Fixture, Non-Metallic Class I, Division II, Appleton Non-Metallic Body, FV Series	1,297.62	132.01
26 54 16 00-0022	EA	High Output Ballast With Two T8 Lamps, 4' Industrial Fluorescent Fixture, Non-Metallic, Class I, Division II, Appleton Non-Metallic Body, FV Series	1,383.09	132.01
26 54 16 00-0023	EA	High Output Ballast With Two T12 Lamps, 4' Industrial Fluorescent Fixture, Non-Metallic, Class I, Division II, Appleton Non-Metallic Body, FV Series	1,413.18	132.01
26 54 16 00-0024		Dust Ignition Proof Fluorescent Fixtures *(26 54 16)*		
26 54 16 00-0025		Heavy-Duty Glass Lamp *(26 54 16 00-0024)*		
26 54 16 00-0026	EA	1 40 Watt Fluorescent Lamp, Explosion Or Dust Proof, Heavy-Duty Glass Fixture	1,111.37	182.51
26 54 16 00-0027	EA	2 40 Watt Fluorescent Lamps, Explosion Or Dust Proof, Heavy-Duty Glass Fixture	1,312.88	199.30
26 54 16 00-0028	EA	4 40 Watt Fluorescent Lamps, Explosion Or Dust Proof, Heavy-Duty Glass Fixture	1,749.54	260.41
26 54 16 00-0029		Heavy-Duty Glass Lamp With Heat Resistant Glass Door *(26 54 16 00-0024)*		
26 54 16 00-0030	EA	2 40 Watt Fluorescent Lamps, Explosion Or Dust Proof, Heavy-Duty Glass Fixture With Heat Resistant Door	758.29	152.62
26 54 19		**LED Classified Location Lighting** *(26 54)*		
26 54 19 00-0001		Class I Division 2, Hazardous Location, LED Fixtures *(26 54 19)*		
26 54 19 00-0002		Class I Division 2, Hazardous Location, NEMA 4X, LED Floodlight (Cooper Champ® FMV) *(26 54 19 00-0001)*		
		Note: Includes 5,600K CRI LED arrays, shatter resistant glass lens, silicone gaskets, stainless steel external hardware and powder coated aluminum housing.		
26 54 19 00-0003	EA	5,183 Lumens, 45 Watt, Yoke Mount, Class I Division 2, NEMA 4X, 7 x 6 Optic, Glass Lens, LED Floodlight (Cooper Champ® FMV5L)	2,769.32	92.74
		For Bolt-On Visor, Add	*106.99*	
		For Bolt-On Wire Guard, Add	*220.06*	
		For 480 Volt, Add	*188.41*	
		For Warm White Color Rendering, Add	*80.00*	
		For >50 To 100, Deduct	*-73.10*	
		For >100 To 250, Deduct	*-142.33*	
		For >250 To 500, Deduct	*-276.93*	
		For >500, Deduct	*-411.53*	
26 54 19 00-0004	EA	7,095 Lumens, 62 Watt, Yoke Mount, Class I Division 2, NEMA 4X, 7 x 6 Optic, Glass Lens, LED Floodlight (Cooper Champ® FMV7L)	3,395.94	98.93
		For Bolt-On Visor, Add	*106.99*	
		For Bolt-On Wire Guard, Add	*220.06*	
		For 480 Volt, Add	*188.41*	
		For Warm White Color Rendering, Add	*80.00*	
		For >50 To 100, Deduct	*-89.02*	
		For >100 To 250, Deduct	*-173.92*	
		For >250 To 500, Deduct	*-339.59*	
		For >500, Deduct	*-505.27*	
26 54 19 00-0005	EA	9,132 Lumens, 79 Watt, Yoke Mount, Class I Division 2, NEMA 4X, 7 x 6 Optic, Glass Lens, LED Floodlight (Cooper Champ® FMV9L)	3,837.71	105.12
		For Bolt-On Visor, Add	*106.99*	
		For Bolt-On Wire Guard, Add	*220.06*	
		For 480 Volt, Add	*188.41*	
		For Warm White Color Rendering, Add	*80.00*	
		For >50 To 100, Deduct	*-100.32*	
		For >100 To 250, Deduct	*-196.27*	
		For >250 To 500, Deduct	*-383.77*	
		For >500, Deduct	*-571.28*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 54 19 00-0006	EA	11,107 Lumens, 99 Watt, Yoke Mount, Class I Division 2, NEMA 4X, 7 x 6 Optic, Glass Lens, LED Floodlight (Cooper Champ® FMV11L)	4,291.78	111.29
		For Bolt-On Visor, Add	*106.99*	
		For Bolt-On Wire Guard, Add	*220.06*	
		For 480 Volt, Add	*188.41*	
		For Warm White Color Rendering, Add	*80.00*	
		For >50 To 100, Deduct	*-111.93*	
		For >100 To 250, Deduct	*-219.23*	
		For >250 To 500, Deduct	*-429.18*	
		For >500, Deduct	*-639.13*	

26 54 19 00-0007 Class I Division 2, Hazardous Location, NEMA 4X, LED Fixture (Cooper Vaporgard™ V2LC) *(26 54 19 00-0001)*

Note: Includes 5,600K CRI LED arrays, heat resistant glass lens, silicone gaskets, stainless steel external hardware and powder coated aluminum housing.

26 54 19 00-0008	EA	1,600 Lumens, 25 Watt, Pendant Mount, Class I Division 2, Hazardous Location, NEMA 4X, LED Fixture (Cooper Vaporgard™ V2LC)	1,628.17	86.57
		For 12/24 Volt DC Driver, Add	*30.41*	
		For Frosted Lens, Add	*62.14*	
		For Warm White Color Temperature LEDs, Add	*80.00*	
		For 55 Degree Ambient Suitability (AC Only) Option, Add	*41.40*	
		For Stanchion Mount, Add	*256.35*	
		For Ceiling Mount, Add	*102.79*	
		For Wall Mount, Add	*150.05*	
		For Teflon Coated Lens, Add	*131.89*	
		For Wall Mount With Junction Box, Add	*219.09*	
		For >50 To 100, Deduct	*-44.31*	
		For >100 To 250, Deduct	*-85.02*	
		For >250 To 500, Deduct	*-162.82*	
		For >500, Deduct	*-240.62*	

26 54 19 00-0009 Class I Division 2, Hazardous Location, NEMA 4X, LED Fixture (Cooper Champ® VMV) *(26 54 19 00-0001)*

Note: Includes 5,600K CRI LED arrays, heat and impact resistant glass lens, silicone gaskets, stainless steel external hardware and powder coated aluminum housing.

26 54 19 00-0010	EA	3,240 Lumens, 47 Watt, Pendant Mount, Class I Division 2, Hazardous Location, NEMA 4X, LED Fixture (Cooper Champ® VMV3L)	2,602.99	86.57
		For Ceiling Mount, Add	*19.67*	
		For Quick Clip Mounting Option, Add	*28.90*	
		For Frosted Lens, Add	*62.14*	
		For Warm White Color Rendering, Add	*80.00*	
		For Polycarbonate Lens, Add	*115.18*	
		For 480 Volt, Add	*188.41*	
		For >50 To 100, Deduct	*-68.68*	
		For >100 To 250, Deduct	*-133.76*	
		For >250 To 500, Deduct	*-260.30*	
		For >500, Deduct	*-386.84*	
26 54 19 00-0011	EA	3,778 Lumens, 63 Watt, Pendant Mount, Class I Division 2, Hazardous Location, NEMA 4X, LED Fixture (Cooper Champ® VMV5L)	2,884.03	92.74
		For Ceiling Mount, Add	*19.67*	
		For Quick Clip Mounting Option, Add	*28.90*	
		For Frosted Lens, Add	*62.14*	
		For Warm White Color Rendering, Add	*80.00*	
		For Polycarbonate Lens, Add	*115.18*	
		For 480 Volt, Add	*188.41*	
		For >50 To 100, Deduct	*-75.97*	
		For >100 To 250, Deduct	*-148.07*	
		For >250 To 500, Deduct	*-288.40*	
		For >500, Deduct	*-428.74*	
26 54 19 00-0012	EA	6,340 Lumens, 98 Watt, Pendant Mount, Class I Division 2, Hazardous Location, NEMA 4X, LED Fixture (Cooper Champ® VMV7L)	3,233.01	98.93
		For Ceiling Mount, Add	*19.67*	
		For Quick Clip Mounting Option, Add	*28.90*	
		For Frosted Lens, Add	*62.14*	
		For Warm White Color Rendering, Add	*80.00*	
		For Polycarbonate Lens, Add	*115.18*	
		For 480 Volt, Add	*188.41*	
		For >50 To 100, Deduct	*-84.95*	
		For >100 To 250, Deduct	*-165.77*	
		For >250 To 500, Deduct	*-323.30*	
		For >500, Deduct	*-480.83*	
26 54 19 00-0013	EA	6,340 Lumens, 98 Watt, Pendant Mount, Class I Division 2, Hazardous Location, NEMA 4X, LED Fixture (Cooper Champ® VMV9L)	4,219.21	105.12
		For Ceiling Mount, Add	*19.67*	
		For Quick Clip Mounting Option, Add	*28.90*	
		For Frosted Lens, Add	*62.14*	
		For Warm White Color Rendering, Add	*80.00*	
		For Polycarbonate Lens, Add	*115.18*	
		For 480 Volt, Add	*188.41*	
		For >50 To 100, Deduct	*-109.86*	
		For >100 To 250, Deduct	*-215.34*	
		For >250 To 500, Deduct	*-421.92*	
		For >500, Deduct	*-628.50*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 54 19 00-0014	EA	9,720 Lumens, 137 Watt, Pendant Mount, Class I Division 2, Hazardous Location, NEMA 4X, LED Fixture (Cooper Champ® VMV11L)	4,843.56	111.29
		For Ceiling Mount, Add	*19.67*	
		For Quick Clip Mounting Option, Add	*28.90*	
		For Frosted Lens, Add	*62.14*	
		For Warm White Color Rendering, Add	*80.00*	
		For Polycarbonate Lens, Add	*115.18*	
		For 480 Volt, Add	*188.41*	
		For >50 To 100, Deduct	*-125.73*	
		For >100 To 250, Deduct	*-246.82*	
		For >250 To 500, Deduct	*-484.36*	
		For >500, Deduct	*-721.90*	

26 54 19 00-0015 Class I Division 1, Explosion Proof, LED Fixtures *(26 54 19)*

26 54 19 00-0016 Class I Division 1, Explosion Proof, NEMA 4X, High Bay/Low Bay, LED Fixture (Cooper Hazard Gard® EVLL) *(26 54 19 00-0015)*

Note: Includes 5,600K CRI LED arrays, shatter resistant and explosion proof glass lens, silicone gaskets, stainless steel external hardware and powder coated aluminum housing.

26 54 19 00-0017	EA	5,625 Lumens, 80 Watt, Pendant Mount, Class I Division 1, Explosion Proof, NEMA 4X, High Bay/Low Bay, LED Fixture (Cooper Hazard Gard® EVLL5L)	7,092.80	92.74
		For Wall Mount, Deduct	*-27.79*	
		For Warm Color Temperature LEDs, Add	*149.63*	
		For Stainless Steel Guard, Add	*268.59*	
		For Ceiling Mount, Add	*324.01*	
		For Stanchion Mount, Add	*377.09*	
		For Yoke Mount, Add	*942.72*	
		For >50 To 100, Deduct	*-181.18*	
		For >100 To 250, Deduct	*-358.50*	
		For >250 To 500, Deduct	*-709.28*	
		For >500, Deduct	*-1,060.06*	
26 54 19 00-0018	EA	6,750 Lumens, 100 Watt, Pendant Mount, Class I Division 1, Explosion Proof, NEMA 4X, High Bay/Low Bay, LED Fixture (Cooper Hazard Gard® EVLL7L)	8,651.97	98.93
		For Wall Mount, Deduct	*-27.79*	
		For Warm Color Temperature LEDs, Add	*149.63*	
		For Stainless Steel Guard, Add	*268.59*	
		For Ceiling Mount, Add	*324.01*	
		For Stanchion Mount, Add	*377.09*	
		For Yoke Mount, Add	*942.72*	
		For >50 To 100, Deduct	*-220.42*	
		For >100 To 250, Deduct	*-436.72*	
		For >250 To 500, Deduct	*-865.20*	
		For >500, Deduct	*-1,293.67*	
26 54 19 00-0019	EA	9,000 Lumens, 130 Watt, Pendant Mount, Class I Division 1, Explosion Proof, NEMA 4X, High Bay/Low Bay, LED Fixture (Cooper Hazard Gard® EVLL9L)	10,070.54	105.12
		For Wall Mount, Deduct	*-27.79*	
		For Warm Color Temperature LEDs, Add	*149.63*	
		For Stainless Steel Guard, Add	*268.59*	
		For Ceiling Mount, Add	*324.01*	
		For Stanchion Mount, Add	*377.09*	
		For Yoke Mount, Add	*942.72*	
		For >50 To 100, Deduct	*-256.14*	
		For >100 To 250, Deduct	*-507.91*	
		For >250 To 500, Deduct	*-1,007.05*	
		For >500, Deduct	*-1,506.20*	
26 54 19 00-0020	EA	10,500 Lumens, 151 Watt, Pendant Mount, Class I Division 1, Explosion Proof, NEMA 4X, High Bay/Low Bay, LED Fixture (Cooper Hazard Gard® EVLL11L)	11,515.37	111.29
		For Wall Mount, Deduct	*-27.79*	
		For Warm Color Temperature LEDs, Add	*149.63*	
		For Stainless Steel Guard, Add	*268.59*	
		For Ceiling Mount, Add	*324.01*	
		For Stanchion Mount, Add	*377.09*	
		For Yoke Mount, Add	*942.72*	
		For >50 To 100, Deduct	*-292.52*	
		For >100 To 250, Deduct	*-580.41*	
		For >250 To 500, Deduct	*-1,151.54*	
		For >500, Deduct	*-1,722.67*	
26 54 19 00-0021	EA	13,500 Lumens, 175 Watt, Pendant Mount, Class I Division 1, Explosion Proof, NEMA 4X, High Bay/Low Bay, LED Fixture (Cooper Hazard Gard® EVLL13L)	13,365.64	107.17
		For Wall Mount, Deduct	*-27.79*	
		For Warm Color Temperature LEDs, Add	*149.63*	
		For Stainless Steel Guard, Add	*268.59*	
		For Ceiling Mount, Add	*324.01*	
		For Stanchion Mount, Add	*377.09*	
		For Yoke Mount, Add	*942.72*	
		For >50 To 100, Deduct	*-339.04*	
		For >100 To 250, Deduct	*-673.18*	
		For >250 To 500, Deduct	*-1,336.56*	
		For >500, Deduct	*-1,999.95*	

26 54 23 HID Classified Location Lighting *(26 54)*

26 54 23 00-0001 Mogul Base, Class I Division II, Dust Ignition Proof Fixtures *(26 54 23)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 54 23 00-0002		**Mogul Base, Class I Division II, Dust Ignition Proof Fixtures Without Reflector** *(26 54 23 00-0001)*		
26 54 23 00-0003	EA	100 Watt High Pressure Sodium High Intensity Discharge, Mogul Base, Industrial Lighting Fixture, Pendant Mounted, Without Reflector, Class I Division II	1,339.21	147.05
26 54 23 00-0004	EA	150 Watt High Pressure Sodium, Mogul Base, Pendant Mounted, Class I Division II, Dust Ignition Proof Fixture Without Reflector	1,348.68	147.05
26 54 23 00-0005		**Mogul Base, Class I Division II, Dust Ignition Proof Fixtures With Standard Reflector** *(26 54 23 00-0001)*		
26 54 23 00-0006	EA	175 Watt Metal Halide, Mogul Base, Pendant Mounted, Class I Division II, Dust Ignition Proof Fixture With Standard Reflector	1,055.80	147.05
26 54 23 00-0007	EA	100 Watt High Pressure Sodium, Mogul Base, Pendant Mounted, Class I Division II, Dust Ignition Proof Fixture With Standard Reflector	1,386.55	147.05
26 54 23 00-0008	EA	150 Watt High Pressure Sodium, Mogul Base, Pendant Mounted, Class I Division II, Dust Ignition Proof Fixture With Standard Reflector	1,396.01	147.05
26 54 23 00-0009		**Mogul Base, Class I Division II, Dust Ignition Proof Fixtures With 30 Degree Reflector** *(26 54 23 00-0001)*		
26 54 23 00-0010	EA	175 Watt Metal Halide, Mogul Base, Pendant Mounted, Class I Division II, Dust Ignition Proof Fixture With 30 Degree Reflector	1,060.54	147.05
26 54 23 00-0011	EA	100 Watt High Pressure Sodium, Mogul Base, Pendant Mounted, Class I Division II, Dust Ignition Proof Fixture With 30 Degree Reflector	1,391.28	147.05
26 54 23 00-0012	EA	150 Watt High Pressure Sodium, Mogul Base, Pendant Mounted, Class I Division II, Dust Ignition Proof Fixture With 30 Degree Reflector	1,400.75	147.05
26 54 23 00-0013		**Mogul Base, Class I Division I, Explosion Proof Fixtures** *(26 54 23)*		
26 54 23 00-0014	EA	175 Watt Metal Halide, Mogul Base, Pendant Mounted, Class I Division I, Explosion Proof Fixture Without Reflector	1,157.95	147.05
		For Standard Reflector, Add	*20.86*	
		For 30 Degree Reflector, Add	*22.55*	
26 54 23 00-0015	EA	100 Watt Metal Halide, Mogul Base, Pendant Mounted, Class I Division I, Explosion Proof Fixture Without Reflector	1,212.76	147.05
		For Standard Reflector, Add	*20.86*	
		For 30 Degree Reflector, Add	*22.55*	
26 54 23 00-0016	EA	150 Watt Metal Halide, Mogul Base, Pendant Mounted, Class I Division I, Explosion Proof Fixture Without Reflector	1,272.74	147.05
		For Standard Reflector, Add	*20.86*	
		For 30 Degree Reflector, Add	*22.55*	

26 55 Special Purpose Lighting *(26 50)*

26 55 13 Landscape Lighting *(26 55)*

26 55 13 00-0001		**Bollards** *(26 55 13)* Note: Excludes concrete base.		
26 55 13 00-0002		**Aluminum Architectural Bollards** *(26 55 13 00-0001)*		
26 55 13 00-0003		**High Pressure Sodium, Aluminum Architectural Bollards** *(26 55 13 00-0002)*		
26 55 13 00-0004		**Square, High Pressure Sodium, Aluminum Architectural Bollards** *(26 55 13 00-0003)*		
26 55 13 00-0005	EA	24" Overall Height, 6-3/4" Square, 35 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,648.71	95.88
26 55 13 00-0006	EA	30" Overall Height, 6-3/4" Square, 35 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,659.99	101.52
26 55 13 00-0007	EA	36" Overall Height, 6-3/4" Square, 35 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,671.27	107.16
26 55 13 00-0008	EA	42" Overall Height, 6-3/4" Square, 35 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,541.86	112.80
26 55 13 00-0009	EA	24" Overall Height, 6-3/4" Square, 50 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,648.71	95.88
26 55 13 00-0010	EA	30" Overall Height, 6-3/4" Square, 50 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,659.99	101.52
26 55 13 00-0011	EA	36" Overall Height, 6-3/4" Square, 50 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,671.27	107.16
26 55 13 00-0012	EA	42" Overall Height, 6-3/4" Square, 50 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,541.86	112.80
26 55 13 00-0013	EA	24" Overall Height, 6-3/4" Square, 70 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,648.71	95.88
26 55 13 00-0014	EA	30" Overall Height, 6-3/4" Square, 70 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,659.99	101.52
26 55 13 00-0015	EA	36" Overall Height, 6-3/4" Square, 70 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,671.27	107.16
26 55 13 00-0016	EA	42" Overall Height, 6-3/4" Square, 70 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,541.86	112.80
26 55 13 00-0017	EA	24" Overall Height, 6-3/4" Square, 100 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,648.71	95.88
26 55 13 00-0018	EA	30" Overall Height, 6-3/4" Square, 100 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,659.99	101.52
26 55 13 00-0019	EA	36" Overall Height, 6-3/4" Square, 100 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,671.27	107.16
26 55 13 00-0020	EA	42" Overall Height, 6-3/4" Square, 100 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,541.86	112.80
26 55 13 00-0021		**Round, High Pressure Sodium, Aluminum Architectural Bollards** *(26 55 13 00-0003)*		
26 55 13 00-0022	EA	24" Overall Height, 7" Diameter, 35 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,584.11	95.88
26 55 13 00-0023	EA	30" Overall Height, 7" Diameter, 35 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,595.39	101.52
26 55 13 00-0024	EA	36" Overall Height, 7" Diameter, 35 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,606.67	107.16
26 55 13 00-0025	EA	42" Overall Height, 7" Diameter, 35 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,476.66	112.80
26 55 13 00-0026	EA	24" Overall Height, 7" Diameter, 50 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,584.11	95.88
26 55 13 00-0027	EA	30" Overall Height, 7" Diameter, 50 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,595.39	101.52
26 55 13 00-0028	EA	36" Overall Height, 7" Diameter, 50 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,606.67	107.16

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 55 13 00-0029	EA	42" Overall Height, 7" Diameter, 50 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,476.66	112.80
26 55 13 00-0030	EA	24" Overall Height, 7" Diameter, 70 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,584.11	95.88
26 55 13 00-0031	EA	30" Overall Height, 7" Diameter, 70 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,595.39	101.52
26 55 13 00-0032	EA	36" Overall Height, 7" Diameter, 70 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,606.67	107.16
26 55 13 00-0033	EA	42" Overall Height, 7" Diameter, 70 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,476.66	112.80
26 55 13 00-0034	EA	24" Overall Height, 7" Diameter, 100 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,584.11	95.88
26 55 13 00-0035	EA	30" Overall Height, 7" Diameter, 100 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,595.39	101.52
26 55 13 00-0036	EA	36" Overall Height, 7" Diameter, 100 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,606.67	107.16
26 55 13 00-0037	EA	42" Overall Height, 7" Diameter, 100 Watt High Pressure Sodium, Aluminum Architectural Bollard	1,476.66	112.80
26 55 13 00-0038		Metal Halide, Aluminum Architectural Bollards *(26 55 13 00-0002)*		
26 55 13 00-0039		Square, Metal Halide, Aluminum Architectural Bollards *(26 55 13 00-0038)*		
26 55 13 00-0040	EA	24" Overall Height, 6-3/4" Square, 50 Watt Metal Halide, Aluminum Architectural Bollard	1,732.60	95.88
26 55 13 00-0041	EA	30" Overall Height, 6-3/4" Square, 50 Watt Metal Halide, Aluminum Architectural Bollard	1,743.88	101.52
26 55 13 00-0042	EA	36" Overall Height, 6-3/4" Square, 50 Watt Metal Halide, Aluminum Architectural Bollard	1,755.16	107.16
26 55 13 00-0043	EA	42" Overall Height, 6-3/4" Square, 50 Watt Metal Halide, Aluminum Architectural Bollard	1,625.16	112.80
26 55 13 00-0044	EA	24" Overall Height, 6-3/4" Square, 70 Watt Metal Halide, Aluminum Architectural Bollard	1,732.60	95.88
26 55 13 00-0045	EA	30" Overall Height, 6-3/4" Square, 70 Watt Metal Halide, Aluminum Architectural Bollard	1,743.88	101.52
26 55 13 00-0046	EA	36" Overall Height, 6-3/4" Square, 70 Watt Metal Halide, Aluminum Architectural Bollard	1,755.16	107.16
26 55 13 00-0047	EA	42" Overall Height, 6-3/4" Square, 70 Watt Metal Halide, Aluminum Architectural Bollard	1,625.16	112.80
26 55 13 00-0048	EA	24" Overall Height, 6-3/4" Square, 100 Watt Metal Halide, Aluminum Architectural Bollard	1,732.60	95.88
26 55 13 00-0049	EA	30" Overall Height, 6-3/4" Square, 100 Watt Metal Halide, Aluminum Architectural Bollard	1,743.88	101.52
26 55 13 00-0050	EA	36" Overall Height, 6-3/4" Square, 100 Watt Metal Halide, Aluminum Architectural Bollard	1,755.16	107.16
26 55 13 00-0051	EA	42" Overall Height, 6-3/4" Square, 100 Watt Metal Halide, Aluminum Architectural Bollard	1,695.35	112.80
26 55 13 00-0052		Round, Metal Halide, Aluminum Architectural Bollards *(26 55 13 00-0038)*		
26 55 13 00-0053	EA	24" Overall Height, 7" Diameter, 50 Watt Metal Halide, Aluminum Architectural Bollard	1,667.40	95.88
26 55 13 00-0054	EA	30" Overall Height, 7" Diameter, 50 Watt Metal Halide, Aluminum Architectural Bollard	1,678.68	101.52
26 55 13 00-0055	EA	36" Overall Height, 7" Diameter, 50 Watt Metal Halide, Aluminum Architectural Bollard	1,689.96	107.16
26 55 13 00-0056	EA	42" Overall Height, 7" Diameter, 50 Watt Metal Halide, Aluminum Architectural Bollard	1,559.96	112.80
26 55 13 00-0057	EA	24" Overall Height, 7" Diameter, 70 Watt Metal Halide, Aluminum Architectural Bollard	1,667.40	95.88
26 55 13 00-0058	EA	30" Overall Height, 7" Diameter, 70 Watt Metal Halide, Aluminum Architectural Bollard	1,678.68	101.52
26 55 13 00-0059	EA	36" Overall Height, 7" Diameter, 70 Watt Metal Halide, Aluminum Architectural Bollard	1,689.96	107.16
26 55 13 00-0060	EA	42" Overall Height, 7" Diameter, 70 Watt Metal Halide, Aluminum Architectural Bollard	1,559.96	112.80
26 55 13 00-0061	EA	24" Overall Height, 7" Diameter, 100 Watt Metal Halide, Aluminum Architectural Bollard	1,667.40	95.88
26 55 13 00-0062	EA	30" Overall Height, 7" Diameter, 100 Watt Metal Halide, Aluminum Architectural Bollard	1,678.68	101.52
26 55 13 00-0063	EA	36" Overall Height, 7" Diameter, 100 Watt Metal Halide, Aluminum Architectural Bollard	1,689.96	107.16
26 55 13 00-0064	EA	42" Overall Height, 7" Diameter, 100 Watt Metal Halide, Aluminum Architectural Bollard	1,559.96	112.80
26 55 13 00-0065	EA	47-1/4" Overall Height, 8-5/8" Diameter, 100 Watt Metal Halide, Aluminum Architectural Bollard (Bega 9483MH)	3,934.91	225.60
26 55 13 00-0066		Compact Fluorescent, Aluminum Architectural Bollards *(26 55 13 00-0002)*		
26 55 13 00-0067		Square, Compact Fluorescent, Aluminum Architectural Bollards *(26 55 13 00-0066)*		
26 55 13 00-0068	EA	24" Overall Height, 6-3/4" Square, 26 Watt Compact Fluorescent, Aluminum Architectural Bollard	1,641.35	95.88
26 55 13 00-0069	EA	30" Overall Height, 6-3/4" Square, 26 Watt Compact Fluorescent, Aluminum Architectural Bollard	1,652.63	101.52
26 55 13 00-0070	EA	36" Overall Height, 6-3/4" Square, 26 Watt Compact Fluorescent, Aluminum Architectural Bollard	1,663.91	107.16
26 55 13 00-0071	EA	42" Overall Height, 6-3/4" Square, 26 Watt Compact Fluorescent, Aluminum Architectural Bollard	1,535.83	112.80
26 55 13 00-0072	EA	24" Overall Height, 6-3/4" Square, 32 Watt Compact Fluorescent, Aluminum Architectural Bollard	1,641.35	95.88
26 55 13 00-0073	EA	30" Overall Height, 6-3/4" Square, 32 Watt Compact Fluorescent, Aluminum Architectural Bollard	1,652.63	101.52
26 55 13 00-0074	EA	36" Overall Height, 6-3/4" Square, 32 Watt Compact Fluorescent, Aluminum Architectural Bollard	1,663.91	107.16
26 55 13 00-0075	EA	42" Overall Height, 6-3/4" Square, 32 Watt Compact Fluorescent, Aluminum Architectural Bollard	1,535.83	112.80
26 55 13 00-0076	EA	24" Overall Height, 6-3/4" Square, 42 Watt Compact Fluorescent, Aluminum Architectural Bollard	1,641.35	95.88
26 55 13 00-0077	EA	30" Overall Height, 6-3/4" Square, 42 Watt Compact Fluorescent, Aluminum Architectural Bollard	1,652.63	101.52
26 55 13 00-0078	EA	36" Overall Height, 6-3/4" Square, 42 Watt Compact Fluorescent, Aluminum Architectural Bollard	1,663.91	107.16
26 55 13 00-0079	EA	42" Overall Height, 6-3/4" Square, 42 Watt Compact Fluorescent, Aluminum Architectural Bollard	1,535.83	112.80
26 55 13 00-0080		Round, Compact Fluorescent, Aluminum Architectural Bollards *(26 55 13 00-0066)*		
26 55 13 00-0081	EA	24" Overall Height, 7" Diameter, 26 Watt Compact Fluorescent, Aluminum Architectural Bollard	1,577.58	95.88
26 55 13 00-0082	EA	30" Overall Height, 7" Diameter, 26 Watt Compact Fluorescent, Aluminum Architectural Bollard	1,588.86	101.52
26 55 13 00-0083	EA	36" Overall Height, 7" Diameter, 26 Watt Compact Fluorescent, Aluminum Architectural Bollard	1,600.14	107.16
26 55 13 00-0084	EA	42" Overall Height, 7" Diameter, 26 Watt Compact Fluorescent, Aluminum Architectural Bollard	1,473.28	112.80
26 55 13 00-0085	EA	24" Overall Height, 7" Diameter, 32 Watt Compact Fluorescent, Aluminum Architectural Bollard	1,577.58	95.88
26 55 13 00-0086	EA	30" Overall Height, 7" Diameter, 32 Watt Compact Fluorescent, Aluminum Architectural Bollard	1,588.86	101.52
26 55 13 00-0087	EA	36" Overall Height, 7" Diameter, 32 Watt Compact Fluorescent, Aluminum Architectural Bollard	1,600.14	107.16
26 55 13 00-0088	EA	42" Overall Height, 7" Diameter, 32 Watt Compact Fluorescent, Aluminum Architectural Bollard	1,473.28	112.80
26 55 13 00-0089	EA	24" Overall Height, 7" Diameter, 42 Watt Compact Fluorescent, Aluminum Architectural Bollard	1,577.58	95.88
26 55 13 00-0090	EA	30" Overall Height, 7" Diameter, 42 Watt Compact Fluorescent, Aluminum Architectural Bollard	1,588.86	101.52
26 55 13 00-0091	EA	36" Overall Height, 7" Diameter, 42 Watt Compact Fluorescent, Aluminum Architectural Bollard	1,600.14	107.16
26 55 13 00-0092	EA	42" Overall Height, 7" Diameter, 42 Watt Compact Fluorescent, Aluminum Architectural Bollard	1,473.28	112.80
26 55 13 00-0093		LED, Aluminum Architectural Bollards *(26 55 13 00-0002)*		
26 55 13 00-0094		Square, LED, Aluminum Architectural Bollards *(26 55 13 00-0093)*		
26 55 13 00-0095	EA	24" Overall Height, 6-3/4" Square, 12 LEDs, Aluminum Architectural Bollard	1,972.48	95.88
26 55 13 00-0096	EA	30" Overall Height, 6-3/4" Square, 12 LEDs, Aluminum Architectural Bollard	1,983.76	101.52

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 55 13 00-0097	EA	36" Overall Height, 6-3/4" Square, 12 LEDs, Aluminum Architectural Bollard	1,995.04	107.16
26 55 13 00-0098	EA	42" Overall Height, 6-3/4" Square, 12 LEDs, Aluminum Architectural Bollard	1,868.72	112.80
26 55 13 00-0099	EA	24" Overall Height, 6-3/4" Square, 24 LEDs, Aluminum Architectural Bollard	2,416.43	95.88
26 55 13 00-0100	EA	30" Overall Height, 6-3/4" Square, 24 LEDs, Aluminum Architectural Bollard	2,427.71	101.52
26 55 13 00-0101	EA	36" Overall Height, 6-3/4" Square, 24 LEDs, Aluminum Architectural Bollard	2,438.99	107.16
26 55 13 00-0102	EA	42" Overall Height, 6-3/4" Square, 24 LEDs, Aluminum Architectural Bollard	2,310.46	112.80
26 55 13 00-0103		**Round, LED, Aluminum Architectural Bollards** *(26 55 13 00-0093)*		
26 55 13 00-0104	EA	24" Overall Height, 7" Diameter, 12 LEDs, Aluminum Architectural Bollard	1,906.25	95.88
26 55 13 00-0105	EA	30" Overall Height, 7" Diameter, 12 LEDs, Aluminum Architectural Bollard	1,917.53	101.52
26 55 13 00-0106	EA	36" Overall Height, 7" Diameter, 12 LEDs, Aluminum Architectural Bollard	1,928.81	107.16
26 55 13 00-0107	EA	42" Overall Height, 7" Diameter, 12 LEDs, Aluminum Architectural Bollard	1,800.28	112.80
26 55 13 00-0108	EA	24" Overall Height, 7" Diameter, 24 LEDs, Aluminum Architectural Bollard	2,350.21	95.88
26 55 13 00-0109	EA	30" Overall Height, 7" Diameter, 24 LEDs, Aluminum Architectural Bollard	2,361.49	101.52
26 55 13 00-0110	EA	36" Overall Height, 7" Diameter, 24 LEDs, Aluminum Architectural Bollard	2,372.77	107.16
26 55 13 00-0111	EA	42" Overall Height, 7" Diameter, 24 LEDs, Aluminum Architectural Bollard	2,245.02	112.80
26 55 13 00-0112		**Reinforced Concrete Bollards** *(26 55 13 00-0001)*		
26 55 13 00-0113	EA	48" Overall Height, 12" Diameter, LED Light, Reinforced Concrete Bollard	1,563.55	282.00
26 55 13 00-0114	EA	58" Overall Height, 18" Diameter, High Intensity Discharge (HID) Light, Reinforced Concrete Bollard	2,791.24	375.96
26 55 13 00-0115		**Low Voltage** *(26 55 13)*		
26 55 13 00-0116	EA	Low Voltage Recessed Uplight	808.84	205.30
26 55 13 00-0117	EA	Low Voltage Walkway	584.66	112.80
26 55 13 00-0118	EA	Low Voltage Malibu - 5 Light Set	562.32	150.59
26 55 13 00-0119	EA	Low Voltage Mushroom 24" Pier	493.26	112.80
26 55 13 00-0120		**Recessed, Adjustable** *(26 55 13)*		
26 55 13 00-0121	EA	150 Watt Incandescent Recessed, Adjustable	968.07	180.48
26 55 13 00-0122	EA	300 Watt Incandescent Recessed, Adjustable	1,066.00	180.48
26 55 13 00-0123		**Recessed, Uplight** *(26 55 13)*		
26 55 13 00-0124	EA	50 Watt Incandescent Recessed Uplight	857.09	180.48
26 55 13 00-0125	EA	150 Watt Incandescent Recessed Uplight	876.68	180.48
26 55 13 00-0126	EA	300 Watt Incandescent Recessed Uplight	935.43	180.48
26 55 13 00-0127	EA	500 Watt Quartz Recessed Uplight	928.90	180.48
26 55 13 00-0128	EA	5 Watt, LED Recessed Uplight	1,171.37	180.48
26 55 13 00-0129	EA	15 Watt, LED Recessed Uplight	1,295.06	180.48
26 55 13 00-0130		**Recessed Wall Light** *(26 55 13)*		
26 55 13 00-0131	EA	100 Watt Incandescent Recessed Wall Light	434.51	112.80
26 55 13 00-0132	EA	100 Watt Fluorescent Recessed Wall Light	414.92	112.80
26 55 13 00-0133	EA	100 Watt High Intensity Discharge (HID) Recessed Wall Light	686.36	150.59
26 55 13 00-0134		**Step Lights** *(26 55 13)*		
26 55 13 00-0135	EA	Incandescent Step Light	356.68	90.24
26 55 13 00-0136	EA	Fluorescent Step Light	422.03	90.24
26 55 13 00-0137	EA	5 Watt, LED Step Light	646.36	90.24
26 55 13 00-0138	EA	15 Watt, LED Step Light	778.29	90.24
26 55 13 00-0139		**Tree Lights, Surface Adjustable** *(26 55 13)*		
26 55 13 00-0140	EA	50 Watt Incandescent Tree Lights	771.23	150.59
26 55 13 00-0141	EA	100 Watt Incandescent Tree Lights	790.81	150.59
26 55 13 00-0142	EA	150 Watt Incandescent Tree Lights	973.47	225.60
26 55 16		**Walkway Lighting** *(26 55)*		
26 55 16 00-0001		**Incandescent Walkway** *(26 55 16)*		
26 55 16 00-0002	EA	Post Top 300 Watt Incandescent Walkway Fixture	391.96	104.90
26 55 16 00-0003		**Metal Halide Walkway** *(26 55 16)*		
26 55 16 00-0004	EA	Post Top 100 Watt Metal Halide Walkway Fixture	602.73	164.91
26 55 16 00-0005	EA	Post Top 150-175 Watt Metal Halide Walkway Fixture	638.48	170.90
26 55 16 00-0006	EA	Post Top 250 Watt Metal Halide Walkway Fixture	688.84	177.43
26 55 16 00-0007	EA	Post Top 400 Watt Metal Halide Walkway Fixture	737.59	191.76
26 55 16 00-0008	EA	Round Luminaries 100 Watt Metal Halide Walkway Fixture	657.02	177.43
26 55 16 00-0009	EA	Round Luminaries 150-175 Watt Metal Halide Walkway Fixture	663.95	164.91
26 55 16 00-0010	EA	Round Luminaries 250 Watt Metal Halide Walkway Fixture	676.68	170.90
26 55 16 00-0011	EA	Spherical 100 Watt Metal Halide Walkway Fixture	537.31	117.54

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 55 16 00-0012	EA	Spherical 150-175 Watt Metal Halide Walkway Fixture	569.13	117.54
26 55 16 00-0013	EA	Spherical 250 Watt Metal Halide Walkway Fixture	600.96	117.54
26 55 16 00-0014	EA	Spherical 400 Watt Metal Halide Walkway Fixture	678.48	132.31
26 55 16 00-0015	EA	Low Walkway 100 Watt Metal Halide Walkway Fixture	513.54	105.58
26 55 16 00-0016		**High Pressure Sodium Walkway** *(26 55 16)*		
26 55 16 00-0017	EA	Post Top 100 Watt High Pressure Sodium Walkway Fixture	543.03	164.91
26 55 16 00-0018	EA	Post Top 150-175 Watt High Pressure Sodium Walkway Fixture	573.58	170.90
26 55 16 00-0019	EA	Post Top 250 Watt High Pressure Sodium Walkway Fixture	615.75	177.43
26 55 16 00-0020	EA	Post Top 400 Watt High Pressure Sodium Walkway Fixture	660.17	191.76
26 55 16 00-0021	EA	Round Luminaries 100 Watt High Pressure Sodium Walkway Fixture	590.89	177.43
26 55 16 00-0022	EA	Round Luminaries 150-175 Watt High Pressure Sodium Walkway Fixture	590.86	164.91
26 55 16 00-0023	EA	Round Luminaries 250 Watt High Pressure Sodium Walkway Fixture	603.43	170.90
26 55 16 00-0024	EA	Spherical 100 Watt High Pressure Sodium Walkway Fixture	471.18	117.54
26 55 16 00-0025	EA	Spherical 175 150-Watt High Pressure Sodium Walkway Fixture	496.04	117.54
26 55 16 00-0026	EA	Spherical 250 Watt High Pressure Sodium Walkway Fixture	520.90	117.54
26 55 16 00-0027	EA	Spherical 400 Watt High Pressure Sodium Walkway Fixture	587.98	132.31
26 55 16 00-0028	EA	Low Walkway 100 Watt High Pressure Sodium Walkway Fixture	517.19	105.58
26 55 16 00-0029		**Walkway, Adjustable** *(26 55 16)*		
26 55 16 00-0030	EA	2' Fluorescent Adjustable Walkway Fixture	568.10	150.59
26 55 16 00-0031	EA	4' Fluorescent Adjustable Walkway Fixture	583.80	150.59
26 55 16 00-0032	EA	8' Fluorescent Adjustable Walkway Fixture	1,005.95	225.60
26 55 16 00-0033	EA	50 Watt Incandescent Adjustable Walkway Fixture	476.81	112.80
26 55 16 00-0034	EA	150 Watt Incandescent Adjustable Walkway Fixture	497.74	112.80
26 55 16 00-0035		**LED Walkway** *(26 55 16)*		
26 55 16 00-0036		**LED Pathway Fixtures (CREE® BetaLED® Edge® PWY-EDG)** *(26 55 16 00-0035)*		
		Note: UL wet listed. Includes 5,700K color temperature, 120/277 voltage, 350mA driver, die-cast extruded aluminum housing assembly and white, black, silver or bronze powder coat finish. Excludes sensors.		
26 55 16 00-0037	EA	13" Height, 1,248 Lumens, 22 Watt, LED Pathway Fixture (CREE® BetaLED® Edge® PWY-EDG)	838.47	86.57
		For Multi-Level Drive Currents, Add	*219.88*	
26 55 16 00-0038	EA	18" Height, 1,248 Lumens, 22 Watt, LED Pathway Fixture (CREE® BetaLED® Edge® PWY-EDG)	865.17	86.57
		For Multi-Level Drive Currents, Add	*219.88*	
26 55 16 00-0039	EA	36" Height, 1,248 Lumens, 22 Watt, LED Pathway Fixture (CREE® BetaLED® Edge® PWY-EDG)	912.29	86.57
		For Multi-Level Drive Currents, Add	*219.88*	
26 55 16 00-0040	EA	42" Height, 1,248 Lumens, 22 Watt, LED Pathway Fixture (CREE® BetaLED® Edge® PWY-EDG)	948.41	86.57
		For Multi-Level Drive Currents, Add	*219.88*	
26 55 16 00-0041	EA	96" Height, 1,248 Lumens, 22 Watt, LED Pathway Fixture (CREE® BetaLED® Edge® PWY-EDG)	1,091.73	111.29
		For Multi-Level Drive Currents, Add	*219.88*	
26 55 16 00-0042		**Wall Mounted Walkway Lighting** *(26 55 16 00-0035)*		
26 55 16 00-0043	EA	Wall Mounted Lantern With LED Kit, No. PDEX-Bracket (Herwig P-492) Note: Type Fixture 17 as Post	4,679.18	
26 55 16 00-0044		**Pole Mounted Walkway Lighting** *(26 55 16 00-0035)*		
26 55 16 00-0045	EA	43-1/2" Height x 19" Diameter, LED Post Lantern (Herwig AP-27)	4,316.33	
26 55 16 00-0046	EA	12' Tapered and Fluted Post (Herwig BRA Series, BRAJ-12) Note: Washers and nuts included	4,236.90	
26 55 29		**Underwater Lighting** *(26 55)*		
26 55 29 00-0001		**Underwater Lights** *(26 55 29)*		
26 55 29 00-0002	EA	150 Watt, 120 Volt Underwater Lights	652.72	75.01
26 55 29 00-0003	EA	300 Watt, 120 Volt Underwater Lights	731.06	75.01
26 55 29 00-0004	EA	1,000 Watt, 120 Volt Underwater Lights	1,825.04	112.80
26 55 29 00-0005	EA	50 Watt, 12 Volt Underwater Lights	685.36	75.01
26 55 29 00-0006	EA	300 Watt, 12 Volt Underwater Lights	776.76	75.01
26 55 29 00-0007	SET	Under Water Fountain Fixture, Set Of 6, 300 Watt, Incandescent	2,002.70	169.20
26 55 39		**Helipad Lighting** *(26 55)*		
26 55 39 00-0001	EA	Heliport Perimeter Light, 40 Watt With Base Housing	492.72	154.57
26 55 39 00-0002	EA	Heliport Landing Direction Light, 40 Watt With Base Housing	492.72	154.57
26 55 39 00-0003	EA	Heliport Pad Insert Light, 40 Watt With Base Housing	1,370.63	154.57
26 55 39 00-0004	EA	Heliport 10' Steel Pole, With 2 - 500 Watt Floodlights	5,206.64	412.21
26 55 39 00-0005	EA	Heliport 1 Obstruction Light, 69 Watt	477.31	128.81
26 55 39 00-0006	EA	Heliport 2 Obstruction Light, 2 - 69 Watt	614.65	154.57
26 55 39 00-0007	EA	Lighted Wind Cone, 8' Wind Sock x 20' Standard 4 Deep Bowl - 150 Watt Fixture Reflector Fixtures, 1 - 69 Watt Obstruction Light	6,251.30	1,624.67
26 55 39 00-0008	EA	Heliport Light Photoelectric Control	630.86	103.05
26 55 39 00-0009	EA	Heliport Air To Ground Radio Control Receiver	2,819.14	206.10

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 55 53		**Security Lighting** *(26 55)*		
26 55 53 11		**Security Flood Lighting** *(26 55 53)*		
26 55 53 11-0001		Flood Lights (General Electric Powerflood®) *(26 55 53 11)*		
26 55 53 11-0002		MPF (Small Size) Series GE Flood Lights *(26 55 53 11-0001)*		
		Note: For perimeters, entrances, building facades and sign lighting. Includes die-cast aluminum housing, corrosion resistant polyester powder finish and thermal shock resistant lens. Anodized aluminum reflector. 1/2" threaded mounting knuckle.		
26 55 53 11-0003		High Pressure Sodium MPF Series GE Flood Lights *(26 55 53 11-0002)*		
26 55 53 11-0004	EA	70 Watt High Pressure Sodium MPF Series GE Flood Light	378.03	97.48
26 55 53 11-0005	EA	100 Watt High Pressure Sodium MPF Series GE Flood Light	381.69	97.48
26 55 53 11-0006	EA	150 Watt High Pressure Sodium MPF Series GE Flood Light	387.79	97.48
26 55 53 11-0007		Metal Halide MPF Series GE Flood Lights *(26 55 53 11-0002)*		
26 55 53 11-0008	EA	70 Watt Metal Halide MPF Series GE Flood Light	523.26	97.48
26 55 53 11-0009		P-154 (Small Size) Series GE Flood Lights *(26 55 53 11-0001)*		
		Note: For parking lots, building security, building facades, recreation areas and sign lighting. Includes die-cast aluminum housing, corrosion resistant polyester powder finish and thermal shock resistant lens. Anodized aluminum reflector. Yoke or slip fitter mounting.		
26 55 53 11-0010		High Pressure Sodium P-154 Series GE Flood Lights *(26 55 53 11-0009)*		
26 55 53 11-0011	EA	70 Watt High Pressure Sodium P-154 Series GE Flood Light	785.96	129.97
26 55 53 11-0012	EA	100 Watt High Pressure Sodium P-154 Series GE Flood Light	790.85	129.97
26 55 53 11-0013	EA	150 Watt High Pressure Sodium P-154 Series GE Flood Light	799.39	129.97
26 55 53 11-0014	EA	250 Watt High Pressure Sodium P-154 Series GE Flood Light	895.80	129.97
26 55 53 11-0015	EA	400 Watt High Pressure Sodium P-154 Series GE Flood Light	923.87	129.97
26 55 53 11-0016		Metal Halide P-154 Series GE Flood Lights *(26 55 53 11-0009)*		
26 55 53 11-0017	EA	175 Watt Metal Halide P-154 Series GE Flood Light	777.42	129.97
26 55 53 11-0018	EA	250 Watt Metal Halide P-154 Series GE Flood Light	820.14	129.97
26 55 53 11-0019	EA	400 Watt Metal Halide P-154 Series GE Flood Light	842.10	129.97
26 55 53 11-0020		PF-154 (Medium Size) Series GE Flood Lights *(26 55 53 11-0001)*		
		Note: For parking lots, building security and building facades. Includes die-cast aluminum housing, corrosion resistant polyester powder finish and thermal shock resistant lens. Anodized aluminum reflector. Yoke or slip fitter mounting.		
26 55 53 11-0021		High Pressure Sodium PF-154 Series GE Flood Lights *(26 55 53 11-0020)*		
26 55 53 11-0022	EA	70 Watt High Pressure Sodium PF-154 Series GE Flood Light	797.71	146.22
26 55 53 11-0023	EA	100 Watt High Pressure Sodium PF-154 Series GE Flood Light	803.81	146.22
26 55 53 11-0024	EA	150 Watt High Pressure Sodium PF-154 Series GE Flood Light	813.57	146.22
26 55 53 11-0025	EA	250 Watt High Pressure Sodium PF-154 Series GE Flood Light	908.77	146.22
26 55 53 11-0026	EA	400 Watt High Pressure Sodium PF-154 Series GE Flood Light	935.62	146.22
26 55 53 11-0027		Metal Halide PF-154 GE Flood Lights *(26 55 53 11-0020)*		
26 55 53 11-0028	EA	175 Watt Metal Halide PF-154 Series GE Flood Light	790.38	146.22
26 55 53 11-0029	EA	250 Watt Metal Halide PF-154 Series GE Flood Light	831.88	146.22
26 55 53 11-0030	EA	400 Watt Metal Halide PF-154 Series GE Flood Light	853.85	146.22
26 55 53 11-0031		PF-400 (Medium Size) Series GE Flood Lights *(26 55 53 11-0001)*		
		Note: For parking lots, building security, building facades, shipping yards and rail yards. Includes die-cast aluminum housing, corrosion resistant polyester powder finish and thermal shock resistant lens. Formed aluminum reflector. Yoke or slip fitter mounting.		
26 55 53 11-0032		High Pressure Sodium PF-400 Series GE Flood Lights *(26 55 53 11-0031)*		
26 55 53 11-0033	EA	150 Watt High Pressure Sodium PF-400 Series GE Flood Light	1,085.73	146.22
26 55 53 11-0034	EA	200 Watt High Pressure Sodium PF-400 Series GE Flood Light	1,171.16	146.22
26 55 53 11-0035	EA	250 Watt High Pressure Sodium PF-400 Series GE Flood Light	1,165.06	146.22
26 55 53 11-0036	EA	400 Watt High Pressure Sodium PF-400 Series GE Flood Light	1,195.57	146.22
26 55 53 11-0037		Metal Halide PF-400 GE Flood Lights *(26 55 53 11-0031)*		
26 55 53 11-0038	EA	175 Watt Metal Halide PF-400 Series GE Flood Light	1,117.46	146.22
26 55 53 11-0039	EA	250 Watt Metal Halide PF-400 Series GE Flood Light	1,143.09	146.22
26 55 53 11-0040	EA	400 Watt Metal Halide PF-400 Series GE Flood Light	1,169.94	146.22
26 55 53 11-0041		PF-1000 (Large Size) Series GE Flood Lights *(26 55 53 11-0001)*		
		Note: For parking lots, industrial yards and sports stadiums. Includes die-cast aluminum housing, corrosion resistant polyester powder finish and thermal shock resistant lens. Formed aluminum reflector. Yoke or slip fitter mounting.		
26 55 53 11-0042		High Pressure Sodium PF-1000 Series GE Flood Lights *(26 55 53 11-0041)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 55 53 11-0043	EA	750 Watt High Pressure Sodium PF-1000 Series GE Flood Light	1,483.14	162.46
26 55 53 11-0044	EA	1,000 Watt High Pressure Sodium PF-1000 Series GE Flood Light	1,483.14	162.46
26 55 53 11-0045		Metal Halide PF-1000 Series GE Flood Lights *(26 55 53 11-0041)*		
26 55 53 11-0046	EA	1,000 Watt Metal Halide PF-1000 Series GE Flood Light	1,412.35	162.46
26 55 53 11-0047		HLU/VLU (Medium Size) FRP Series GE Flood Lights *(26 55 53 11-0001)* Note: For parking lots, industrial yards, construction sites, recreation areas and facades. Includes corrosion resistant reinforced polyester housing and thermal shock resistant lens. Hydroformed aluminum reflector. Yoke or slip fitter mounting.		
26 55 53 11-0048		High Pressure Sodium HLU/VLU FRP Series GE Flood Lights *(26 55 53 11-0047)*		
26 55 53 11-0049	EA	250 Watt High Pressure Sodium HLU/VLU FRP Series GE Flood Light	1,202.90	146.22
26 55 53 11-0050	EA	400 Watt High Pressure Sodium HLU/VLU FRP Series GE Flood Light	1,226.08	146.22
26 55 53 11-0051		Metal Halide HLU/VLU Series GE Flood Lights *(26 55 53 11-0047)*		
26 55 53 11-0052	EA	400 Watt Metal Halide HLU/VLU FRP Series GE Flood Light	1,216.32	146.22
26 55 53 11-0053		Accessories For Powerflood GE Flood Lights *(26 55 53 11-0001)*		
26 55 53 11-0054	EA	Wireguard For Powerflood GE Flood Light	205.33	32.49
26 55 53 11-0055	EA	Polycarbonate Vandal Shield For Powerflood GE Flood Light	115.02	32.49
26 55 53 11-0056	EA	Top Visor For Powerflood Flood Light	171.16	32.49
26 55 53 11-0057	EA	Top And Two Side Visors For Powerflood GE Flood Light	128.44	32.49
26 55 53 11-0058	EA	Pipe Wall Mounting Bracket For Powerflood GE Flood Light	319.45	97.48
26 55 53 11-0059	EA	Multiple Mounting Channel For Powerflood GE Flood Light	141.87	32.49
26 55 53 11-0060	EA	Wall Or Flat Surface Bracket For Powerflood GE Flood Light	227.91	97.48
26 55 53 11-0061	EA	Steel Angle Bracket For Powerflood GE Flood Light	238.90	97.48
26 55 53 11-0062	EA	Cross Arm Adaptor For Powerflood GE Flood Light	104.03	32.49
26 55 53 11-0063	EA	120/240 Volt, 277 Volt, NEMA Twistlock Photocontrol For Powerflood GE Flood Light	100.37	32.49
26 55 53 11-0064		Flood Lights (Lithonia Contour Series) *(26 55 53 11)*		
26 55 53 11-0065		TFM (Small Size) Series Lithonia Flood Lights *(26 55 53 11-0064)* Note: For signs, flags, facades and landscaping. Includes die-cast aluminum housing, corrosion resistant polyester powder finish and thermal shock resistant lens. Faceted parabolic optics. 1/2" threaded mounting knuckle.		
26 55 53 11-0066		High Pressure Sodium TFM Series Lithonia Flood Lights *(26 55 53 11-0065)*		
26 55 53 11-0067	EA	70 Watt High Pressure Sodium TFM Series Lithonia Flood Light	720.99	129.97
26 55 53 11-0068	EA	100 Watt High Pressure Sodium TFM Series Lithonia Flood Light	791.46	129.97
26 55 53 11-0069	EA	150 Watt High Pressure Sodium TFM Series Lithonia Flood Light	860.46	129.97
26 55 53 11-0070		Metal Halide TFM Series Lithonia Flood Lights *(26 55 53 11-0065)*		
26 55 53 11-0071	EA	50 Watt Metal Halide TFM Series Lithonia Flood Light	946.58	129.97
26 55 53 11-0072	EA	70 Watt Metal Halide TFM Series Lithonia Flood Light	929.61	129.97
26 55 53 11-0073	EA	100 Watt Metal Halide TFM Series Lithonia Flood Light	902.27	129.97
26 55 53 11-0074	EA	175 Watt Metal Halide TFM Series Lithonia Flood Light	900.25	129.97
26 55 53 11-0075		Compact Fluorescent TFM Series Lithonia Flood Lights *(26 55 53 11-0065)*		
26 55 53 11-0076	EA	42 Watt Compact Fluorescent TFM Series Lithonia Flood Light	939.55	129.97
26 55 53 11-0077		TFL (Medium Size) Series Lithonia Flood Lights *(26 55 53 11-0064)* Note: For recreation areas, parking lots, building facades and car lots. Includes die-cast aluminum housing, corrosion resistant polyester powder finish and thermal shock resistant lens. Anodized aluminum reflector. Yoke or slip fitter mounting.		
26 55 53 11-0078		High Pressure Sodium TFL Series Lithonia Flood Lights *(26 55 53 11-0077)*		
26 55 53 11-0079	EA	250 Watt High Pressure Sodium TFL Series Lithonia Flood Light	1,120.69	146.22
26 55 53 11-0080	EA	400 Watt High Pressure Sodium TFL Series Lithonia Flood Light	1,144.19	146.22
26 55 53 11-0081		Metal Halide TFL Series Lithonia Flood Lights *(26 55 53 11-0077)*		
26 55 53 11-0082	EA	175 Watt Metal Halide TFL Series Lithonia Flood Light	1,067.87	146.22
26 55 53 11-0083	EA	250 Watt Metal Halide TFL Series Lithonia Flood Light	1,067.87	146.22
26 55 53 11-0084	EA	400 Watt Metal Halide TFL Series Lithonia Flood Light	1,104.72	146.22
26 55 53 11-0085		TFR (Low Profile) Series Lithonia Flood Lights *(26 55 53 11-0064)* Note: For recreation areas, parking lots, building facades and car lots. Includes die-cast aluminum housing, corrosion resistant polyester powder finish and thermal shock resistant lens. Anodized aluminum reflector. Yoke or slip fitter mounting.		
26 55 53 11-0086		High Pressure Sodium TFR Lithonia Flood Lights *(26 55 53 11-0085)*		
26 55 53 11-0087	EA	150 Watt High Pressure Sodium Horizontal TFR Series Lithonia Flood Light	1,076.48	129.97

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 55 53 11-0088	EA	250 Watt High Pressure Sodium Horizontal TFR Series Lithonia Flood Light	1,111.65	129.97
26 55 53 11-0089	EA	400 Watt High Pressure Sodium Horizontal TFR Series Lithonia Flood Light	1,141.04	129.97
26 55 53 11-0090		**Metal Halide TFR Lithonia Flood Lights** *(26 55 53 11-0085)*		
26 55 53 11-0091	EA	250 Watt Metal Halide TFR Series Lithonia Flood Light	1,064.71	129.97
26 55 53 11-0092	EA	400 Watt Metal Halide TFR Series Lithonia Flood Light	1,099.94	129.97
26 55 53 11-0093		**TFA (Large Size) Series Lithonia Flood Lights** *(26 55 53 11-0064)*		
		Note: For industrial yards, parking lots, construction sites, streets and recreational areas. Includes die-cast aluminum housing, corrosion resistant polyester powder finish and thermal shock resistant lens. Anodized aluminum reflector. Yoke or slip fitter mounting.		
26 55 53 11-0094		**High Pressure Sodium TFA Series Lithonia Flood Lights** *(26 55 53 11-0093)*		
26 55 53 11-0095	EA	1,000 Watt High Pressure Sodium TFA Series Lithonia Flood Light	2,116.26	162.46
26 55 53 11-0096		**Metal Halide TFA Series Lithonia Flood Lights** *(26 55 53 11-0093)*		
26 55 53 11-0097	EA	400 Watt Metal Halide TFA Series Lithonia Flood Light	1,617.02	162.46
26 55 53 11-0098	EA	1,000 Watt Metal Halide TFA Series Lithonia Flood Light	1,793.20	162.46
26 55 53 11-0099		**Accessories For Contour Series Lithonia Flood Lights** *(26 55 53 11-0064)*		
26 55 53 11-0100	EA	Wireguard For Contour Series Lithonia Flood Light	175.72	32.49
26 55 53 11-0101	EA	Vandal Guard For Contour Series Lithonia Flood Light	348.66	32.49
26 55 53 11-0102	EA	Upper Visor For Contour Series Lithonia Flood Light	143.09	32.49
26 55 53 11-0103	EA	Full Visor For Contour Series Lithonia Flood Light	195.93	32.49
26 55 53 11-0104	EA	Pipe Wall Mounting Bracket For Contour Series Lithonia Flood Light	429.85	97.48
26 55 53 11-0105	EA	Radius Wall Bracket For Contour Series Lithonia Flood Light	336.34	97.48
26 55 53 11-0106	EA	Steel Angle Bracket For Contour Series Lithonia Flood Light	336.34	97.48
26 55 53 11-0107	EA	U Bolt Wall Bracket For Contour Series Lithonia Flood Light, Mounts To 2" Pipe	373.63	97.48
26 55 53 11-0108	EA	Crossarm Adapter For Horizontal Mounted Contour Lithonia Series Flood Light	167.69	32.49
26 55 53 11-0109	EA	120/240 Volt, 277 Volt, NEMA Twistlock Photocontrol For Contour Lithonia Series Flood Light	131.86	32.49
26 55 53 11-0110		**Flood Lights (Eaton)** *(26 55 53 11)*		
26 55 53 11-0111	EA	6" x 6", 16,932 Lumens, 128 Watt, LED Flood Light (Eaton NFFLD-C40-D-UNV-66-T-CB)	1,155.31	129.97
		For NEMA Photocontrol Option (Eaton OA/RA1016), Add	*63.18*	
		For >50 To 100, Deduct	*-35.38*	
		For >100 To 250, Deduct	*-64.26*	
		For >250 To 500, Deduct	*-115.53*	
		For >500, Deduct	*-166.80*	
26 55 53 11-0112	EA	16,900 Lumens, 128 Watt, NEMA 6H x 6V Wide, Trunnion Mount, 4000K CCT, Night Falcon LED Flood Light With Multi-Tap (Cooper Industries NFFLD-C40-D-UNV-66-T-CB-PER7+OA/RA1016)	1,439.36	141.94
		For >50 To 100, Deduct	*-43.08*	
		For >100 To 250, Deduct	*-79.07*	
		For >250 To 500, Deduct	*-143.94*	
		For >500, Deduct	*-208.81*	
26 55 53 11-0113		**Flood Lights (Ruud)** *(26 55 53 11)*		
26 55 53 11-0114		**NS (Micro) Series Ruud Flood Lights** *(26 55 53 11-0113)*		
		Note: Provides conventional floodlighting. 1/2" threaded mounting knuckle.		
26 55 53 11-0115		**High Pressure Sodium NS Series Ruud Flood Lights** *(26 55 53 11-0114)*		
26 55 53 11-0116	EA	35 Watt High Pressure Sodium NS Series Ruud Flood Light	470.78	97.48
26 55 53 11-0117	EA	50 Watt High Pressure Sodium NS Series Ruud Flood Light	470.78	97.48
26 55 53 11-0118	EA	70 Watt High Pressure Sodium NS Series Ruud Flood Light	470.78	97.48
26 55 53 11-0119	EA	100 Watt High Pressure Sodium NS Series Ruud Flood Light	470.78	97.48
26 55 53 11-0120	EA	150 Watt High Pressure Sodium NS Series Ruud Flood Light	470.78	97.48
26 55 53 11-0121		**Metal Halide NS Series Ruud Flood Lights** *(26 55 53 11-0114)*		
26 55 53 11-0122	EA	50 Watt Metal Halide NS Series Ruud Flood Light	539.13	97.48
26 55 53 11-0123	EA	70 Watt Metal Halide NS Series Ruud Flood Light	539.13	97.48
26 55 53 11-0124	EA	100 Watt Metal Halide NS Series Ruud Flood Light	539.13	97.48
26 55 53 11-0125		**Compact Fluorescent NS Series Ruud Flood Lights** *(26 55 53 11-0114)*		
26 55 53 11-0126	EA	13 Watt Compact Fluorescent NS Series Ruud Flood Light	400.00	97.48
26 55 53 11-0127	EA	26 Watt Compact Fluorescent NS Series Ruud Flood Light	417.08	97.48
26 55 53 11-0128	EA	32 Watt Compact Fluorescent NS Series Ruud Flood Light	421.96	97.48
26 55 53 11-0129	EA	42 Watt Compact Fluorescent NS Series Ruud Flood Light	426.85	97.48
26 55 53 11-0130		**NSF/NSW/NSC (Standard, Wide And Cutoff Micro) Series Ruud Flood Lights** *(26 55 53 11-0113)*		
		Note: The NSF is suited for large open areas and façade applications. The NSW is suited for roadway applications, parking areas or security. The NSC is designed for parking lot and outdoor sports areas. Yoke or slip fitter mounting.		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 55 53 11-0131		**High Pressure Sodium NSF/NSW/NSC Series Ruud Flood Lights** *(26 55 53 11-0130)*		
26 55 53 11-0132	EA	150 Watt High Pressure Sodium NSF/NSW/NSC Series Ruud Flood Light	726.92	146.22
26 55 53 11-0133	EA	250 Watt High Pressure Sodium NSF/NSW/NSC Series Ruud Flood Light	770.86	146.22
26 55 53 11-0134	EA	400 Watt High Pressure Sodium NSF/NSW/NSC Series Ruud Flood Light	795.27	146.22
26 55 53 11-0135		**Metal Halide NSF/NSW/NSC Series Ruud Flood Lights** *(26 55 53 11-0130)*		
26 55 53 11-0136	EA	175 Watt Metal Halide NSF/NSW/NSC Series Ruud Flood Light	717.16	146.22
26 55 53 11-0137	EA	250 Watt Metal Halide NSF/NSW/NSC Series Ruud Flood Light	722.04	146.22
26 55 53 11-0138	EA	400 Watt Metal Halide NSF/NSW/NSC Series Ruud Flood Light	736.68	146.22
26 55 53 11-0139		**Compact Fluorescent NSF/NSW/NSC Series Ruud Flood Lights** *(26 55 53 11-0130)*		
26 55 53 11-0140	EA	70 Watt Compact Fluorescent NSF/NSW/NSC Series Ruud Flood Light	700.07	146.22
26 55 53 11-0141		**FS (Square) Series Ruud Flood Lights** *(26 55 53 11-0113)* Note: For signs, large open areas and façade applications. Yoke or slip fitter mounting.		
26 55 53 11-0142		**High Pressure Sodium FS Series Ruud Flood Lights** *(26 55 53 11-0141)*		
26 55 53 11-0143	EA	250 Watt High Pressure Sodium FS Series Ruud Flood Light	856.29	146.22
26 55 53 11-0144	EA	400 Watt High Pressure Sodium FS Series Ruud Flood Light	861.17	146.22
26 55 53 11-0145	EA	1,000 Watt High Pressure Sodium FS Series Ruud Flood Light	1,484.36	162.46
26 55 53 11-0146		**Metal Halide FS Series Ruud Flood Lights** *(26 55 53 11-0141)*		
26 55 53 11-0147	EA	175 Watt Metal Halide FS Series Ruud Flood Light	856.29	146.22
26 55 53 11-0148	EA	250 Watt Metal Halide FS Series Ruud Flood Light	861.17	146.22
26 55 53 11-0149	EA	400 Watt Metal Halide FS Series Ruud Flood Light	875.82	146.22
26 55 53 11-0150	EA	1,000 Watt Metal Halide FS Series Ruud Flood Light	1,323.26	162.46
26 55 53 11-0151		**MFS (Mini Square) Series Ruud Flood Lights** *(26 55 53 11-0113)* Note: For signs, large open areas and façade applications. Yoke or slip fitter mounting.		
26 55 53 11-0152		**High Pressure Sodium MFS Series Ruud Flood Lights** *(26 55 53 11-0151)*		
26 55 53 11-0153	EA	35 Watt High Pressure Sodium MFS Series Ruud Flood Light	667.58	129.97
26 55 53 11-0154	EA	50 Watt High Pressure Sodium MFS Series Ruud Flood Light	718.84	129.97
26 55 53 11-0155	EA	70 Watt High Pressure Sodium MFS Series Ruud Flood Light	718.84	129.97
26 55 53 11-0156	EA	100 Watt High Pressure Sodium MFS Series Ruud Flood Light	718.84	129.97
26 55 53 11-0157	EA	150 Watt High Pressure Sodium MFS Series Ruud Flood Light	718.84	129.97
26 55 53 11-0158		**Metal Halide MFS Series Ruud Flood Lights** *(26 55 53 11-0151)*		
26 55 53 11-0159	EA	50 Watt Metal Halide MFS Series Ruud Flood Light	735.93	129.97
26 55 53 11-0160	EA	70 Watt Metal Halide MFS Series Ruud Flood Light	735.93	129.97
26 55 53 11-0161	EA	100 Watt Metal Halide MFS Series Ruud Flood Light	735.93	129.97
26 55 53 11-0162	EA	175 Watt Metal Halide MFS Series Ruud Flood Light	709.08	129.97
26 55 53 11-0163		**MCF/MPM/MPN (Mini Cutoff. Parabolic Medium And Narrow Mini Square) Series Ruud Flood Lights** *(26 55 53 11-0113)* Note: The MCF is suited for parking lots, volleyball courts and tennis courts. The MPM and MPN are suited for flagpoles, columns and narrow signs. Yoke or slip fitter mounting.		
26 55 53 11-0164		**High Pressure Sodium MCF/MPM/MPN Series Ruud Flood Lights** *(26 55 53 11-0163)*		
26 55 53 11-0165	EA	35 Watt High Pressure Sodium MCF/MPM/MPN Series Ruud Flood Light	728.60	129.97
26 55 53 11-0166	EA	50 Watt High Pressure Sodium MCF/MPM/MPN Series Ruud Flood Light	779.86	129.97
26 55 53 11-0167	EA	70 Watt High Pressure Sodium MCF/MPM/MPN Series Ruud Flood Light	779.86	129.97
26 55 53 11-0168	EA	100 Watt High Pressure Sodium MCF/MPM/MPN Series Ruud Flood Light	779.86	129.97
26 55 53 11-0169	EA	150 Watt High Pressure Sodium MCF/MPM/MPN Series Ruud Flood Light	779.86	129.97
26 55 53 11-0170		**Metal Halide MCF/MPM/MPN Series Ruud Flood Lights** *(26 55 53 11-0163)*		
26 55 53 11-0171	EA	50 Watt Metal Halide MCF/MPM/MPN Series Ruud Flood Light	796.95	129.97
26 55 53 11-0172	EA	70 Watt Metal Halide MCF/MPM/MPN Series Ruud Flood Light	796.95	129.97
26 55 53 11-0173	EA	100 Watt Metal Halide MCF/MPM/MPN Series Ruud Flood Light	796.95	129.97
26 55 53 11-0174	EA	175 Watt Metal Halide MCF/MPM/MPN Series Ruud Flood Light	770.10	129.97
26 55 53 11-0175		**CF (Cutoff Square) Series Ruud Flood Lights** *(26 55 53 11-0113)* Note: The CF is suited for parking lots, volleyball courts and tennis courts. Yoke or slip fitter mounting.		
26 55 53 11-0176		**High Pressure Sodium CF Series Ruud Flood Lights** *(26 55 53 11-0175)*		
26 55 53 11-0177	EA	250 Watt High Pressure Sodium CF Series Ruud Flood Light	971.01	146.22
26 55 53 11-0178	EA	400 Watt High Pressure Sodium CF Series Ruud Flood Light	995.42	146.22
26 55 53 11-0179	EA	1,000 Watt High Pressure Sodium CF Series Ruud Flood Light	1,545.38	162.46
26 55 53 11-0180		**Metal Halide CF Series Ruud Flood Lights** *(26 55 53 11-0175)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 55 53 11-0181	EA	175 Watt Metal Halide CF Series Ruud Flood Light	917.31	146.22
26 55 53 11-0182	EA	250 Watt Metal Halide CF Series Ruud Flood Light	922.19	146.22
26 55 53 11-0183	EA	400 Watt Metal Halide CF Series Ruud Flood Light	936.84	146.22
26 55 53 11-0184	EA	1,000 Watt Metal Halide CF Series Ruud Flood Light	1,384.28	162.46
26 55 53 11-0185		CN (Narrow Beam Cutoff Square) Series Ruud Flood Lights *(26 55 53 11-0113)*		
		Note: The CN is suited for large sports fields, building facades and signs. Yoke or slip fitter mounting.		
26 55 53 11-0186		High Pressure Sodium CN Series Ruud Flood Lights *(26 55 53 11-0185)*		
26 55 53 11-0187	EA	400 High Pressure Sodium CN Series Ruud Flood Light	1,262.24	162.46
26 55 53 11-0188	EA	1,000 High Pressure Sodium CN Series Ruud Flood Light	1,516.09	162.46
26 55 53 11-0189		Metal Halide CN Series Ruud Flood Lights *(26 55 53 11-0185)*		
26 55 53 11-0190	EA	400 Watt Metal Halide CN Series Ruud Flood Light	1,203.65	162.46
26 55 53 11-0191	EA	1,000 Watt Metal Halide CN Series Ruud Flood Light	1,354.99	162.46
26 55 53 11-0192		PM/PN (Parabolic Medium And Narrow Square) Series Ruud Flood Lights *(26 55 53 11-0113)*		
		Note: The PM and PN are suited for flagpoles, columns and narrow signs. Yoke or slip fitter mounting.		
26 55 53 11-0193		High Pressure Sodium PM/PN Series Ruud Flood Lights *(26 55 53 11-0192)*		
26 55 53 11-0194	EA	250 Watt High Pressure Sodium PM/PN Series Ruud Flood Light	1,005.18	146.22
26 55 53 11-0195	EA	400 Watt High Pressure Sodium PM/PN Series Ruud Flood Light	1,029.59	146.22
26 55 53 11-0196		Metal Halide PM/PN Series Ruud Flood Lights *(26 55 53 11-0192)*		
26 55 53 11-0197	EA	175 Watt Metal Halide PM/PN Series Ruud Flood Light	951.48	146.22
26 55 53 11-0198	EA	250 Watt Metal Halide PM/PN Series Ruud Flood Light	956.36	146.22
26 55 53 11-0199	EA	400 Watt Metal Halide PM/PN Series Ruud Flood Light	971.01	146.22
26 55 53 11-0200	EA	1,000 Watt Metal Halide PM/PN Series Ruud Flood Light	1,418.45	162.46
26 55 53 11-0201		Accessories For Ruud Flood Lighting *(26 55 53 11-0113)*		
26 55 53 11-0202	EA	Wireguard For Rudd Flood Light	101.59	32.49
26 55 53 11-0203	EA	Deep Baffle (Full Visor) For Rudd Flood Light	167.50	32.49
26 55 53 11-0204	EA	Glare Guard (Upper Visor) For Rudd Flood Light	118.68	32.49
26 55 53 11-0205	EA	Vandal Shield For Rudd Flood Light	143.09	32.49
26 55 53 11-0206	EA	Pipe Mounting Bracket For Ruud Flood Light	277.95	97.48
26 55 53 11-0207	EA	120/240 Volt, 277 Volt, NEMA Twistlock Photocontrol For Ruud Flood Light	86.95	32.49
26 55 53 11-0208		Flood Lights (Lumark) *(26 55 53 11)*		
26 55 53 11-0209		QZ Wedge Series Quartz Lumark Flood Lights *(26 55 53 11-0208)*		
		Note: For small outdoor areas. Die-cast aluminum housing heat and weather resistant gaskets.		
26 55 53 11-0210	EA	500 Watt QZ Wedge Series Quartz Lumark Flood Light	244.88	97.48
26 55 53 11-0211		LQL Series Quartz Lumark Flood Lights *(26 55 53 11-0208)*		
		Note: For medium size outdoor areas. Die-cast aluminum housing heat and weather resistant gaskets.		
26 55 53 11-0212	EA	1,500 Watt LQL Series Quartz Lumark Flood Light	316.88	97.48
26 55 53 11-0213		Flood Lights (Kim Lighting) *(26 55 53 11)*		
26 55 53 11-0214		MicroFlood® Series Kim Lighting Flood Lights *(26 55 53 11-0213)*		
		Note: For signs, flags, facades and landscaping. Includes die-cast aluminum housing, corrosion resistant polyester powder finish and gasketed and tempered lens. 1/2" threaded mounting knuckle.		
26 55 53 11-0215		LED MicroFlood® Series Kim Lighting Flood Lights *(26 55 53 11-0214)*		
26 55 53 11-0216	EA	5 Watt, LED MicroFlood® Series Kim Lighting Flood Light	559.70	39.55
		For >50 To 100, Deduct	*-15.97*	
		For >100 To 250, Deduct	*-29.96*	
		For >250 To 500, Deduct	*-55.97*	
		For >500, Deduct	*-81.98*	
26 55 53 11-0217	EA	15 Watt, LED MicroFlood® Series Kim Lighting Flood Light	695.17	39.55
		For >50 To 100, Deduct	*-19.36*	
		For >100 To 250, Deduct	*-36.74*	
		For >250 To 500, Deduct	*-69.52*	
		For >500, Deduct	*-102.30*	
26 55 53 11-0218		Scarab® Series Kim Lighting Flood Lights *(26 55 53 11-0213)*		
		Note: For signs, flags, facades and landscaping. Includes die-cast aluminum housing, corrosion resistant polyester powder finish and gasketed and tempered lens. 1/2" threaded mounting knuckle.		
26 55 53 11-0219		LED Scarab® Series Kim Lighting Accent Flood Lights *(26 55 53 11-0218)*		
		Note: Spot or narrow style accent flood lights.		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 55 53 11-0220	EA	6 Watt, LED Scarab® Series Kim Lighting Accent Flood Light	861.57	39.55
		For >50 To 100, Deduct	*-23.52*	
		For >100 To 250, Deduct	*-45.06*	
		For >250 To 500, Deduct	*-86.16*	
		For >500, Deduct	*-127.26*	

26 55 53 11-0221 Flood Lights (CREE® BetaLED®) *(26 55 53 11)*

26 55 53 11-0222 Yoke Mount, Square, LED Flood Lights (CREE® BetaLED® FLD-304) *(26 55 53 11-0221)*

Note: UL wet listed. Includes 5,700K color temperature, 120-480 voltage, 350mA driver, die-cast extruded aluminum housing assembly and white, black, silver or bronze powder coat finish. Excludes sensors.

26 55 53 11-0223	EA	40 LEDs, 47 Watt, Yoke Mount, Square, LED Flood Light (CREE® BetaLED® FLD-304)	1,092.94	116.13
		For >50 To 100, Deduct	*-33.13*	
		For >100 To 250, Deduct	*-60.45*	
		For >250 To 500, Deduct	*-109.29*	
		For >500, Deduct	*-158.13*	
26 55 53 11-0224	EA	60 LEDs, 68 Watt, Yoke Mount, Square, LED Flood Light (CREE® BetaLED® FLD-304)	1,196.95	122.58
		For >50 To 100, Deduct	*-36.05*	
		For >100 To 250, Deduct	*-65.98*	
		For >250 To 500, Deduct	*-119.70*	
		For >500, Deduct	*-173.41*	

26 55 53 11-0225 Adjustable Arm Mount, Rectangular, LED Flood Lights (CREE® BetaLED® Edge® FLD-EDG) *(26 55 53 11-0221)*

Note: UL wet listed. Includes 5,700K color temperature, 120/277 voltage, 350mA driver, die-cast extruded aluminum housing assembly and white, black, silver or bronze powder coat finish. Excludes sensors.

26 55 53 11-0226	EA	20 LEDs, 26 Watt, Adjustable Arm Mount, Rectangular, LED Flood Light (CREE® BetaLED® Edge® FLD-EDG)	949.68	109.68
		For 480 Volt, Add	*113.84*	
		For >50 To 100, Deduct	*-29.23*	
		For >100 To 250, Deduct	*-52.97*	
		For >250 To 500, Deduct	*-94.97*	
		For >500, Deduct	*-136.97*	
26 55 53 11-0227	EA	40 LEDs, 47 Watt, Adjustable Arm Mount, Rectangular, LED Flood Light (CREE® BetaLED® Edge® FLD-EDG)	1,193.46	116.13
		For 480 Volt, Add	*113.84*	
		For >50 To 100, Deduct	*-35.64*	
		For >100 To 250, Deduct	*-65.48*	
		For >250 To 500, Deduct	*-119.35*	
		For >500, Deduct	*-173.21*	
26 55 53 11-0228	EA	60 LEDs, 68 Watt, Adjustable Arm Mount, Rectangular, LED Flood Light (CREE® BetaLED® Edge® FLD-EDG)	1,437.25	122.58
		For 480 Volt, Add	*113.84*	
		For >50 To 100, Deduct	*-42.06*	
		For >100 To 250, Deduct	*-77.99*	
		For >250 To 500, Deduct	*-143.73*	
		For >500, Deduct	*-209.46*	
26 55 53 11-0229	EA	80 LEDs, 90 Watt, Adjustable Arm Mount, Rectangular, LED Flood Light (CREE® BetaLED® Edge® FLD-EDG)	1,773.69	129.04
		For 480 Volt, Add	*113.84*	
		For >50 To 100, Deduct	*-50.79*	
		For >100 To 250, Deduct	*-95.14*	
		For >250 To 500, Deduct	*-177.37*	
		For >500, Deduct	*-259.60*	
26 55 53 11-0230	EA	100 LEDs, 111 Watt, Adjustable Arm Mount, Rectangular, LED Flood Light (CREE® BetaLED® Edge® FLD-EDG)	2,017.48	135.48
		For 480 Volt, Add	*113.84*	
		For >50 To 100, Deduct	*-57.21*	
		For >100 To 250, Deduct	*-107.65*	
		For >250 To 500, Deduct	*-201.75*	
		For >500, Deduct	*-295.85*	
26 55 53 11-0231	EA	120 LEDs, 132 Watt, Adjustable Arm Mount, Rectangular, LED Flood Light (CREE® BetaLED® Edge® FLD-EDG)	2,261.25	141.94
		For 480 Volt, Add	*113.84*	
		For >50 To 100, Deduct	*-63.63*	
		For >100 To 250, Deduct	*-120.16*	
		For >250 To 500, Deduct	*-226.13*	
		For >500, Deduct	*-332.09*	
26 55 53 11-0232	EA	140 LEDs, 157 Watt, Adjustable Arm Mount, Rectangular, LED Flood Light (CREE® BetaLED® Edge® FLD-EDG)	2,578.85	148.39
		For 480 Volt, Add	*113.84*	
		For >50 To 100, Deduct	*-71.89*	
		For >100 To 250, Deduct	*-136.36*	
		For >250 To 500, Deduct	*-257.89*	
		For >500, Deduct	*-379.41*	
26 55 53 11-0233	EA	160 LEDs, 179 Watt, Adjustable Arm Mount, Rectangular, LED Flood Light (CREE® BetaLED® Edge® FLD-EDG)	2,822.62	154.84
		For 480 Volt, Add	*113.84*	
		For >50 To 100, Deduct	*-78.31*	
		For >100 To 250, Deduct	*-148.87*	
		For >250 To 500, Deduct	*-282.26*	
		For >500, Deduct	*-415.65*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 55 53 11-0234		Adjustable Arm Mount, Rectangular, High Output, LED Flood Lights (CREE® BetaLED® Edge® FLD-EHO) *(26 55 53 11-0221)*		
		Note: UL wet listed. Includes 5,700K color temperature, 120/277 voltage, 700mA driver, die-cast extruded aluminum housing assembly and white, black, silver or bronze powder coat finish. Excludes sensors.		
26 55 53 11-0235	EA	120 LEDs, 267 Watt, Adjustable Arm Mount, Rectangular, High Output, LED Flood Light (CREE® BetaLED® Edge® FLD-EHO)	2,168.59	141.94
		For 3 Or 7-Pin NEMA Photocell Receptacle, Add	*18.52*	
		For Bird Spikes, Add	*43.37*	
		For 5,000K Color Temperature, Add	*46.31*	
		For Fuse, Add	*55.57*	
		For 0 To 10 Volt Dimming, Add	*55.57*	
		For 480 Volt, Add	*83.36*	
		For Multi-Level, Add	*120.40*	
		For 1,000mA Driver, Add	*155.60*	
		For >50 To 100, Deduct	*-61.31*	
		For >100 To 250, Deduct	*-115.53*	
		For >250 To 500, Deduct	*-216.86*	
		For >500, Deduct	*-318.19*	
26 55 53 11-0236	EA	240 LEDs, 533 Watt, Adjustable Arm Mount, Rectangular, High Output, LED Flood Light (CREE® BetaLED® Edge® FLD-EHO)	3,672.40	174.20
		For 3 Or 7-Pin NEMA Photocell Receptacle, Add	*18.52*	
		For 5,000K Color Temperature, Add	*46.31*	
		For Fuse, Add	*55.57*	
		For 0 To 10 Volt Dimming, Add	*55.57*	
		For Bird Spikes, Add	*64.11*	
		For Multi-Level, Add	*120.40*	
		For 1,000mA Driver, Add	*155.60*	
		For 480 Volt, Add	*166.71*	
		For >50 To 100, Deduct	*-100.52*	
		For >100 To 250, Deduct	*-192.33*	
		For >250 To 500, Deduct	*-367.24*	
		For >500, Deduct	*-542.15*	
26 55 53 11-0237		Direct Or Adjustable Arm Mount, Rectangular, High Output, LED Flood Lights (CREE® BetaLED® OSQ™) *(26 55 53 11-0221)*		
		Note: UL wet listed. Includes 3,000K or 4,000K or 5,700K color temperature, 120/277 voltage, Class 1 driver, die-cast extruded aluminum housing assembly and white, black, silver or bronze powder coat finish. Excludes sensors.		
26 55 53 11-0238	EA	112 Watt, Direct Or Adjustable Arm Mount, Rectangular, High Output, LED Flood Light (CREE® BetaLED® OSQ™ OSQ-A-NM-XXX-A-XXX-US-UL)	1,275.83	141.94
		For 3 Or 7-Pin NEMA Photocell Receptacle, Add	*18.52*	
		For Front Facing Optics, Back Light Shield, Add	*33.63*	
		For Rotated Optics, Back Light Shield, Add	*33.63*	
		For Field Adjustable Output, Add	*27.79*	
		For Fuse, Add	*55.57*	
		For 0 To 10 Volt Dimming, Add	*55.57*	
		For Multi-Level, Add	*120.40*	
		For >50 To 100, Deduct	*-38.99*	
		For >100 To 250, Deduct	*-70.89*	
		For >250 To 500, Deduct	*-127.58*	
		For >500, Deduct	*-184.28*	
26 55 53 11-0239	EA	168 Watt, Direct Or Adjustable Arm Mount, Rectangular, High Output, LED Flood Light (CREE® BetaLED® OSQ™ OSQ-A-NM-XXX-J-XXX-US-UL)	1,363.36	141.94
		Note: Type III, IV or V medium optics only.		
		For 3 Or 7-Pin NEMA Photocell Receptacle, Add	*18.52*	
		For Front Facing Optics, Back Light Shield, Add	*33.63*	
		For Rotated Optics, Back Light Shield, Add	*33.63*	
		For Field Adjustable Output, Add	*27.79*	
		For Fuse, Add	*55.57*	
		For 0 To 10 Volt Dimming, Add	*55.57*	
		For Type II Medium Or Type V Short Optics, Add	*602.16*	
		For Multi-Level, Add	*120.40*	
		For >50 To 100, Deduct	*-41.18*	
		For >100 To 250, Deduct	*-75.27*	
		For >250 To 500, Deduct	*-136.34*	
		For >500, Deduct	*-197.41*	
26 55 53 11-0240	EA	223 Watt, Direct Or Adjustable Arm Mount, Rectangular, High Output, LED Flood Light (CREE® BetaLED® OSQ™ OSQ-A-NM-XXX-S-XXX-US-UL)	1,748.79	174.20
		For 3 Or 7-Pin NEMA Photocell Receptacle, Add	*18.52*	
		For Field Adjustable Output, Add	*27.79*	
		For Front Facing Optics, Back Light Shield, Add	*40.76*	
		For Rotated Optics, Back Light Shield, Add	*40.76*	
		For Fuse, Add	*55.57*	
		For 0 To 10 Volt Dimming, Add	*55.57*	
		For Multi-Level, Add	*120.40*	
		For >50 To 100, Deduct	*-52.43*	
		For >100 To 250, Deduct	*-96.15*	
		For >250 To 500, Deduct	*-174.88*	
		For >500, Deduct	*-253.61*	
26 55 53 11-0241		Flood Lights (PlanLED) *(26 55 53 11)*		
26 55 53 11-0242		Adjustable Arm Mount, LED Flood Lights (PlanLED WAPA) *(26 55 53 11-0241)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 55 53 11-0243	EA	6,250 Lumens, 50 Watt, Adjustable Arm Mount, Rectangular, LED Flood Light (PlanLED WAPA WP050)	669.59	116.13
		For >50 To 100, Deduct	*-22.55*	
		For >100 To 250, Deduct	*-39.29*	
		For >250 To 500, Deduct	*-66.96*	
		For >500, Deduct	*-94.63*	
26 55 53 11-0244	EA	9,375 Lumens, 75 Watt, Adjustable Arm Mount, Rectangular, LED Flood Light (PlanLED WAPA WP075)	805.84	122.58
		For >50 To 100, Deduct	*-26.28*	
		For >100 To 250, Deduct	*-46.42*	
		For >250 To 500, Deduct	*-80.58*	
		For >500, Deduct	*-114.75*	
26 55 53 11-0245	EA	12,500 Lumens, 100 Watt, Adjustable Arm Mount, Rectangular, LED Flood Light (PlanLED WAPA WP100)	932.84	132.26
		For >50 To 100, Deduct	*-29.93*	
		For >100 To 250, Deduct	*-53.26*	
		For >250 To 500, Deduct	*-93.28*	
		For >500, Deduct	*-133.31*	
26 55 53 11-0246		**Adjustable Arm Mount, LED Sports Flood Lights (PlanLED SUFA)** *(26 55 53 11-0241)*		
26 55 53 11-0247	EA	21,000 Lumens, 200 Watt, LED Sports Flood Light (PlanLED SUFA SF200)	1,895.40	258.07
		For 0 To 10 Volt Dimming, Add	*96.89*	
		For >50 To 100, Deduct	*-60.29*	
		For >100 To 250, Deduct	*-107.67*	
		For >250 To 500, Deduct	*-189.54*	
		For >500, Deduct	*-271.41*	
26 55 53 11-0248	EA	42,000 Lumens, 400 Watt, LED Sports Flood Light (PlanLED SUFA SF400)	2,983.10	258.07
		For 0 To 10 Volt Dimming, Add	*96.89*	
		For >50 To 100, Deduct	*-87.48*	
		For >100 To 250, Deduct	*-162.06*	
		For >250 To 500, Deduct	*-298.31*	
		For >500, Deduct	*-434.56*	
26 55 53 11-0249	EA	84,000 Lumens, 800 Watt, LED Sports Flood Light (PlanLED SUFA SF800)	5,324.48	258.07
		For 0 To 10 Volt Dimming, Add	*96.89*	
		For >50 To 100, Deduct	*-146.02*	
		For >100 To 250, Deduct	*-279.13*	
		For >250 To 500, Deduct	*-532.45*	
		For >500, Deduct	*-785.77*	
26 55 53 11-0250		**Adjustable Arm Mount, LED High Mast Flood Lights (PlanLED MAHA)** *(26 55 53 11-0241)*		
26 55 53 11-0251	EA	26,000 Lumens, 200 Watt, Adjustable Arm Mount, Rectangular, LED High Mast Flood Light (PlanLED MAHA MA200)	1,696.81	167.75
		For 0 To 10 Volt Dimming, Add	*96.89*	
		For 480 Volt, Add	*145.78*	
		For >50 To 100, Deduct	*-50.81*	
		For >100 To 250, Deduct	*-93.23*	
		For >250 To 500, Deduct	*-169.68*	
		For >500, Deduct	*-246.13*	
26 55 53 11-0252	EA	39,000 Lumens, 300 Watt, Adjustable Arm Mount, Rectangular, LED High Mast Flood Light (PlanLED MAHA MA300)	2,185.16	174.20
		For 0 To 10 Volt Dimming, Add	*96.89*	
		For 480 Volt, Add	*117.75*	
		For >50 To 100, Deduct	*-63.34*	
		For >100 To 250, Deduct	*-117.97*	
		For >250 To 500, Deduct	*-218.52*	
		For >500, Deduct	*-319.06*	
26 55 53 11-0253	EA	52,000 Lumens, 400 Watt, Adjustable Arm Mount, Rectangular, LED High Mast Flood Light (PlanLED MAHA MA400)	2,801.35	180.64
		For 0 To 10 Volt Dimming, Add	*96.89*	
		For 480 Volt, Add	*95.48*	
		For >50 To 100, Deduct	*-79.07*	
		For >100 To 250, Deduct	*-149.10*	
		For >250 To 500, Deduct	*-280.14*	
		For >500, Deduct	*-411.17*	
26 55 53 11-0254		**Flood Lights (Everlast)** *(26 55 53 11)*		
26 55 53 11-0255		**Yoke Mount, Square, LED Flood Lights (Everlast EL-LED-FL)** *(26 55 53 11-0254)*		
		Note: UL wet listed. Includes 2,700K, 4,000K or 5,000K color temperature, 120-277 voltage, die-cast extruded aluminum housing assembly and black powder coat finish. Excludes sensors.		
26 55 53 11-0256	EA	100 Watt, 11,000 Lumens, Yoke Mount, Wet Location, LED Floodlight (Everlast EL-LED-FL)	723.75	111.29
		For >50 To 100, Deduct	*-22.73*	
		For >100 To 250, Deduct	*-40.83*	
		For >250 To 500, Deduct	*-72.38*	
		For >500, Deduct	*-103.93*	
26 55 53 11-0257	EA	150 Watt, 16,500 Lumens, Yoke Mount, Wet Location, LED Floodlight (Everlast EL-LED-FL)	824.67	111.29
		For >50 To 100, Deduct	*-25.25*	
		For >100 To 250, Deduct	*-45.87*	
		For >250 To 500, Deduct	*-82.47*	
		For >500, Deduct	*-119.06*	
26 55 53 11-0258	EA	200 Watt, 22,000 Lumens, Yoke Mount, Wet Location, LED Floodlight (Everlast EL-LED-FL)	959.23	111.29
		For >50 To 100, Deduct	*-28.62*	
		For >100 To 250, Deduct	*-52.60*	
		For >250 To 500, Deduct	*-95.92*	
		For >500, Deduct	*-139.25*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 55 53 11-0259		High Mast Flood Lights (Carolina) *(26 55 53 11)* Note: Installation and demolition includes a line truck with an aerial platform.		
26 55 53 11-0260		Adjustable Arm Mount, LED High Mast Flood Lights With Wireless Control Node (Carolina High Mast UltaSpot LED) *(26 55 53 11-0259)* Note: Includes a General Electric LightGrid™ outdoor wireless control node.		
26 55 53 11-0261	EA	30,000 Lumens, 320 Watt, Adjustable Arm Mount, LED High Mast Flood Light With Wireless Control Node (Carolina High Mast USLED-01-G-01-50-70-M-1 ELWN0A5UG5)	3,569.97	29.04
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*38.71*	
		For >50 To 100, Deduct	*-92.48*	
		For >100 To 250, Deduct	*-181.72*	
		For >250 To 500, Deduct	*-357.00*	
		For >500, Deduct	*-532.27*	
		For Up To 1,000, Add	*344.09*	
26 55 53 11-0262	EA	65,000 Lumens, 640 Watt, Adjustable Arm Mount, LED High Mast Flood Light With Wireless Control Node (Carolina High Mast USLED-02-G-01-50-70-M-1 ELWN0A5UG5)	5,357.72	29.04
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*38.71*	
		For >50 To 100, Deduct	*-137.17*	
		For >100 To 250, Deduct	*-271.11*	
		For >250 To 500, Deduct	*-535.77*	
		For >500, Deduct	*-800.43*	
		For Up To 1,000, Add	*522.87*	
26 55 53 12		**Security Hazardous Location Flood Lights** *(26 55 53)* Note: For general to heavy industrial applications in marine and corrosive environments. Class 1 Division 2.		
26 55 53 12-0001		Lithonia Hazardous Location Flood Lights *(26 55 53 12)*		
26 55 53 12-0002		HFR (Horizontally Oriented Mogul Base) Series Hazardous Location Flood Lights *(26 55 53 12-0001)* Note: Includes die-cast aluminum housing, corrosion resistant polyester powder finish and thermal shock resistant lens. Precision-formed reflector. Yoke mounting.		
26 55 53 12-0003		High Pressure Sodium HFR Series Hazardous Location Flood Lights *(26 55 53 12-0002)*		
26 55 53 12-0004	EA	150 Watt High Pressure Sodium HFR Series Lithonia Class 1 Div 2 Hazardous Location Flood Light	1,066.20	129.97
26 55 53 12-0005	EA	250 Watt High Pressure Sodium HFR Series Lithonia Class 1 Div 2 Hazardous Location Flood Light	1,141.87	129.97
26 55 53 12-0006	EA	400 Watt High Pressure Sodium HFR Series Lithonia Class 1 Div 2 Hazardous Location Flood Light	1,068.64	129.97
26 55 53 12-0007		Metal Halide HFR Series Lithonia Hazardous Location Flood Lights *(26 55 53 12-0002)*		
26 55 53 12-0008	EA	250 Watt Metal Halide HFR Series Lithonia Class 1 Div 2 Hazardous Location Flood Light	1,133.79	129.97
26 55 53 12-0009	EA	400 Watt Metal Halide HFR Series Lithonia Class 1 Div 2 Hazardous Location Flood Light	1,097.94	129.97
26 55 53 12-0010		HFM (Medium Base) Series Hazardous Location Flood Lights *(26 55 53 12-0001)* Note: Includes die-cast aluminum housing, corrosion resistant polyester powder finish and thermal shock resistant lens. Precision-formed reflector. Yoke mounting.		
26 55 53 12-0011		High Pressure Sodium HFM Series Lithonia Hazardous Location Flood Lights *(26 55 53 12-0010)*		
26 55 53 12-0012	EA	100 Watt High Pressure Sodium HFM Series Lithonia Class 1 Div 2 Hazardous Location Flood Light	1,014.19	129.97
26 55 53 12-0013	EA	150 Watt High Pressure Sodium HFM Series Lithonia Class 1 Div 2 Hazardous Location Flood Light	1,059.34	129.97
26 55 53 12-0014		Metal Halide HFM Series Lithonia Hazardous Location Flood Lights *(26 55 53 12-0010)*		
26 55 53 12-0015	EA	175 Watt Metal Halide HFM Series Lithonia Class 1 Div 2 Hazardous Location Flood Light	892.14	129.97
26 55 53 12-0016		HFA (Large) Series Hazardous Location Flood Lights *(26 55 53 12-0001)* Note: Includes die-cast aluminum housing, corrosion resistant polyester powder finish and thermal shock resistant lens. Precision-formed reflector. Yoke mounting.		
26 55 53 12-0017		High Pressure Sodium HFA Series Lithonia Hazardous Location Flood Lights *(26 55 53 12-0016)*		
26 55 53 12-0018	EA	250 Watt High Pressure Sodium HFA Series Lithonia Class 1 Div 2 Hazardous Location Flood Light	1,440.42	162.46
26 55 53 12-0019	EA	400 Watt High Pressure Sodium HFA Series Lithonia Class 1 Div 2 Hazardous Location Flood Light	1,462.39	162.46
26 55 53 12-0020		Metal Halide HFA Series Lithonia Hazardous Location Flood Lights *(26 55 53 12-0016)*		
26 55 53 12-0021	EA	250 Watt Metal Halide HFA Series Lithonia Class 1 Div 2 Hazardous Location Flood Light	1,433.10	162.46
26 55 53 12-0022	EA	400 Watt Metal Halide HFA Series Lithonia Class 1 Div 2 Hazardous Location Flood Light	1,462.39	162.46
26 55 53 12-0023		HFL (Medium) Series Hazardous Location Flood Lights *(26 55 53 12-0001)* Note: Includes die-cast aluminum housing, corrosion resistant polyester powder finish and thermal shock resistant lens. Precision-formed reflector. Yoke mounting.		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 55 53 12-0024		High Pressure Sodium HFL Series Lithonia Hazardous Location Flood Lights *(26 55 53 12-0023)*		
26 55 53 12-0025	EA	400 Watt High Pressure Sodium HFL Series Lithonia Class 1 Div 2 Hazardous Location Flood Light	1,061.32	146.22
26 55 53 12-0026		Metal Halide HFL Series Lithonia Hazardous Location Flood Lights *(26 55 53 12-0023)*		
26 55 53 12-0027	EA	400 Watt Metal Halide HFL Series Lithonia Class 1 Div 2 Hazardous Location Flood Light	1,146.76	146.22
26 55 53 12-0028		Accessories For Lithonia Hazardous Location Flood Lights *(26 55 53 12-0001)* See CSI section 26 55 53 11-0099 for accessories.		
26 55 53 13		**Security High Performance Flood Lights** *(26 55 53)* Note: For airport aprons and parking areas.		
26 55 53 13-0001		Lithonia High Performance Flood Lights *(26 55 53 13)*		
26 55 53 13-0002		170S Series Lithonia High Performance Flood Lights *(26 55 53 13-0001)* Note: Die-cast aluminum housing welded seams, stainless steel hardware, corrosion resistant polyester powder finish, and thermal and shock resistant flat lens.		
26 55 53 13-0003		High Pressure Sodium 170S Series Lithonia High Performance Flood Lights *(26 55 53 13-0002)*		
26 55 53 13-0004	EA	250 Watt High Pressure Sodium 170S Series Lithonia High Performance Flood Light	2,511.06	194.96
26 55 53 13-0005	EA	400 Watt High Pressure Sodium 170S Series Lithonia High Performance Flood Light	2,711.22	194.96
26 55 53 13-0006	EA	750 Watt High Pressure Sodium 170S Series Lithonia High Performance Flood Light	2,720.98	194.96
26 55 53 13-0007	EA	1,000 Watt High Pressure Sodium 170S Series Lithonia High Performance Flood Light	3,026.09	194.96
26 55 53 13-0008		Metal Halide 170S Series Lithonia High Performance Flood Lights *(26 55 53 13-0002)*		
26 55 53 13-0009	EA	320 Watt Metal Halide 170S Series Lithonia High Performance Flood Light	2,899.17	194.96
26 55 53 13-0010	EA	350 Watt Metal Halide 170S Series Lithonia High Performance Flood Light	2,763.82	194.96
26 55 53 13-0011	EA	400 Watt Metal Halide 170S Series Lithonia High Performance Flood Light	2,635.55	194.96
26 55 53 13-0012	EA	1,000 Watt Metal Halide 170S Series Lithonia High Performance Flood Light	2,762.47	194.96
26 55 53 13-0013		Accessories For Lithonia High Performance Flood Lights *(26 55 53 13-0002)* See CSI section 26 55 53 11-0099 for accessories.		
26 55 61		**Theatrical Lighting** *(26 55)*		
26 55 61 00-0001		Stage Lighting *(26 55 61)*		
26 55 61 00-0002	EA	Ellipsoidal Spotlight, Two 6" x 9" Lenses Note: Stainless steel shutter blades, complete with color frame, c-clamp, safety cable, 20 amperes, 3 watts ground, male pin connector and high performance lamp.	652.40	137.05
26 55 61 00-0003	EA	Ellipsoidal Spotlight, Two 6" x 12" Lenses Note: Stainless steel shutter blades, complete with color frame, c-clamp, safety cable, 20 amperes, 3 watts ground, male pin connector and high performance lamp.	652.40	137.05
26 55 61 00-0004	EA	Ellipsoidal Spotlight, Two 6" x 16" Lenses Note: Stainless steel shutter blades, complete with color frame, c-clamp, safety cable, 20 amperes, 3 watts ground, male pin connector and high performance lamp.	652.40	137.05
26 55 61 00-0005	EA	14" Scoop Floodlight (Altman #SC14)	674.36	137.05
26 55 61 00-0006	EA	6" Diameter Fresnel Spotlight, Spherical Specular Alzak1 Note: Reflector, heat resistant fresnel lens, slidefocus flood to spot, complete with yoke, c-clamp, safety cable, color frame, male pin connector and lamp.	525.78	137.05
26 55 61 00-0007	EA	8" Diameter Fresnel Spotlight, Spherical Specular Alzak Note: Reflector, heat resistant fresnel lens, slidefocus flood to spot, complete with yoke, C-clamp, safety cable, color frame, male pin connector and lamp.	880.27	137.05
26 55 61 00-0008	EA	Follow Spotlight With Steel Chassis And Lightweight Note: Aluminum housing, includes lamp adjustment plate, silent lamp fan, dowser, iris and clipper, rear lens control, coated lenses, six color boomerang, color fan, 34" x 34" castered stand.	2,356.84	137.05
26 55 61 00-0009	EA	Follow Spotlight With Steel Chassis And Lightweight Note: Aluminum housing, includes lamp adjustment plate, ballast, electronic power supply, stepdown transformer, silent lamp fan, dowser, iris and clipper, rear lens control, coated lenses, six color boomerang, color fan, 34" x 34" castered stand.	2,845.75	137.05
26 55 61 00-0010	EA	300 To 1000 Watt, PAR 64 Can Lighting With 20 Gauge Sheet Steel Note: Formed lamp housing, hinged and latched rear housing secured by retention ring, safety cable, safety screen, PAR 64 lamp, male pin connector.	476.58	137.05
26 55 61 00-0011	EA	6' Length, Multi-Lamp Compartmented Striplighting Luminaire Note: With continuous sheet steel housing, supported by 1-1/2" x 3/16" steel yoke with C-clamp, includes 30 lights per section wired on 3 circuits, alzak aluminum reflector with matte finish.	1,788.11	137.05
26 55 61 00-0012	EA	1,000 Watt, 25 To 125' Throw, Follow Spotlight (Times Square Lighting QF1000S)	3,069.32	137.05
26 55 63		**Detention Lighting** *(26 55)*		
26 55 63 00-0001		Maximum Security Recessed Luminaire *(26 55 63)* Note: Failsafe - FMR series.		
26 55 63 00-0002	EA	12" x 48", Two 32 Watt, T8 Fluorescent Lamps, 14 Gauge, Maximum Security Recessed Luminaire Note: Includes one electronic ballast for T8 lamps, 0.125" prismatic acrylic fixture side lens, 0.005" UV absorbing inner layer overlay, 0.375" clear polycarbonate.	1,295.37	37.09
26 55 63 00-0003	EA	12" x 48", Three 32 Watt, Lamps,14 Gauge, Maximum Security Recessed Luminaire Note: Includes one electronic ballast for T8 lamps, 0.125" prismatic acrylic fixture side lens, 0.005" UV absorbing inner layer overlay, 0.375" clear polycarbonate.	1,422.45	37.09

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 55 63 00-0004	EA	24" x 24", Two 17 Watt, Lamps,14 Gauge, Maximum Security Recessed Luminaire Note: Includes one electronic ballast for T8 lamps, 0.125" prismatic acrylic fixture side lens, 0.005" UV absorbing inner layer overlay, 0.375" clear polycarbonate.	1,243.11	44.53
26 55 63 00-0005	EA	24" x 48", Two 32 Watt, Lamps,14 Gauge, Maximum Security Recessed Luminaire Note: Includes one electronic ballast for T8 lamps, 0.125" prismatic acrylic fixture side lens, 0.005" UV absorbing inner layer overlay, 0.375" clear polycarbonate.	1,699.15	51.94
26 55 63 00-0006	EA	24" x 48", Three 32 Watt, Lamps,14 Gauge, Maximum Security Recessed Luminaire Note: Includes one electronic ballast for T8 lamps, 0.125" prismatic acrylic fixture side lens, 0.005" UV absorbing inner layer overlay, 0.375" clear polycarbonate.	1,699.15	51.94
26 55 63 00-0007	EA	24" x 48", Four 32 Watt, Lamps,14 Gauge, Maximum Security Recessed Luminaire Note: Includes one electronic ballast for T8 lamps, 0.125" prismatic acrylic fixture side lens, 0.005" UV absorbing inner layer overlay, 0.375" clear polycarbonate.	1,699.15	51.94
26 55 63 00-0008	EA	12" x 48", Two 32 Watt, T8 Fluorescent Lamps, 16 Gauge, Maximum Security Recessed Luminaire Note: Includes one electronic ballast for T8 lamps, 0.125" prismatic acrylic fixture side lens, 0.005" UV absorbing inner layer overlay, 0.375" clear polycarbonate.	1,295.37	37.09
26 55 63 00-0009	EA	12" x 48", Three 32 Watt, Lamps,16 Gauge, Maximum Security Recessed Luminaire Note: Includes one electronic ballast for T8 lamps, 0.125" prismatic acrylic fixture side lens, 0.005" UV absorbing inner layer overlay, 0.375" clear polycarbonate.	1,485.98	37.09
26 55 63 00-0010	EA	24" x 24", Two 17 Watt, T8 Fluorescent Lamps, 16 Gauge, Maximum Security Recessed Luminaire Note: Includes one electronic ballast for T8 lamps, 0.125" prismatic acrylic fixture side lens, 0.005" UV absorbing inner layer overlay, 0.187" clear tempered glass environmental side.	1,306.65	44.53
26 55 63 00-0011	EA	24" x 48", Two 32 Watt, Lamps,16 Gauge, Maximum Security Recessed Luminaire Note: Includes one electronic ballast for T8 lamps, 0.125" prismatic acrylic fixture side lens, 0.005" UV absorbing inner layer overlay, 0.187" clear tempered glass environmental side.	1,508.54	51.94
26 55 63 00-0012	EA	24" x 48", Three 32 Watt, T8 Fluorescent Lamps, 16 Gauge, Maximum Security Recessed Luminaire Note: Includes one electronic ballast for T8 lamps, 0.125" prismatic acrylic fixture side lens, 0.005" UV absorbing inner layer overlay, 0.187" clear tempered glass environmental side.	1,508.54	51.94
26 55 63 00-0013	EA	24" x 48", Four 32 Watt, T8 Fluorescent Lamps, 16 Gauge, Maximum Security Recessed Luminaire Note: Includes one electronic ballast for T8 lamps, 0.125" prismatic acrylic fixture side lens, 0.005" UV absorbing inner layer overlay, 0.187" clear tempered glass environmental side.	1,508.54	51.94
26 55 63 00-0014	EA	12" x 48", Two 32 Watt, Lamps,18 Gauge, Maximum Security Recessed Luminaire Note: Includes one electronic ballast for T8 lamps, 0.125" prismatic acrylic fixture side lens, 0.005" UV absorbing inner layer overlay, 0.375" clear polycarbonate.	1,136.53	37.09
26 55 63 00-0015	EA	12" x 48", Three 32 Watt, Lamps,18 Gauge, Maximum Security Recessed Luminaire Note: Includes one electronic ballast for T8 lamps, 0.125" prismatic acrylic fixture side lens, 0.005" UV absorbing inner layer overlay, 0.375" clear polycarbonate.	1,136.53	37.09
26 55 63 00-0016	EA	24" x 24", Two 17 Watt, Lamps,18 Gauge, Maximum Security Recessed Luminaire Note: Includes one electronic ballast for T8 lamps, 0.125" prismatic acrylic fixture side lens, 0.005" UV absorbing inner layer overlay, 0.375" clear polycarbonate.	1,370.19	44.53
26 55 63 00-0017	EA	24" x 48", Two 32 Watt, Lamps,18 Gauge, Maximum Security Recessed Luminaire Note: Includes one electronic ballast for T8 lamps, 0.125" prismatic acrylic fixture side lens, 0.005" UV absorbing inner layer overlay, 0.375" clear polycarbonate.	1,635.62	51.94
26 55 63 00-0018	EA	24" x 48", Three 32 Watt, Lamps,18 Gauge, Maximum Security Recessed Luminaire Note: Includes one electronic ballast for T8 lamps, 0.125" prismatic acrylic fixture side lens, 0.005" UV absorbing inner layer overlay, 0.375" clear polycarbonate.	1,648.32	51.94
26 55 63 00-0019	EA	24" x 48", Four 32 Watt, Lamps,18 Gauge, Maximum Security Recessed Luminaire Note: Includes one electronic ballast for T8 lamps, 0.125" prismatic acrylic fixture side lens, 0.005" UV absorbing inner layer overlay, 0.375" clear polycarbonate.	1,648.32	51.94
26 55 63 00-0020		Maximum Security Surface Luminaire *(26 55 63)* Note: Failsafe - FMR series.		
26 55 63 00-0021	EA	12" x 24", Two 32 Watt, Lamps,12 Gauge, Maximum Security Surface Luminaire Note: Includes one electronic ballast for T8 lamps, 0.005" UV absorbing inner layer overlay, 0.375" clear polycarbonate environmental side.	1,168.30	37.09
26 55 63 00-0022	EA	12" x 24", Three 32 Watt, Lamps,12 Gauge, Maximum Security Surface Luminaire Note: Includes one electronic ballast for T8 lamps, 0.005" UV absorbing inner layer overlay, 0.375" clear polycarbonate environmental side.	1,454.21	37.09
26 55 63 00-0023	EA	12" x 48", Two 32 Watt, Lamps,14 Gauge, Maximum Security Surface Luminaire Note: Includes one electronic ballast for T8 lamps, 0.005" UV absorbing inner layer overlay, 0.375" clear polycarbonate environmental side.	1,104.76	37.09
26 55 63 00-0024	EA	12" x 48", Three 32 Watt, Lamps,14 Gauge, Maximum Security Surface Luminaire Note: Includes one electronic ballast for T8 lamps, 0.005" UV absorbing inner layer overlay, 0.375" clear polycarbonate environmental side.	1,104.76	37.09
26 55 63 00-0025	EA	19" x 24", Two 17 Watt, Lamps,14 Gauge, Maximum Security Surface Luminaire Note: Includes one electronic ballast for T8 lamps, 0.005" UV absorbing inner layer overlay, 0.375" clear polycarbonate environmental side.	1,084.27	44.53
26 55 63 00-0026	EA	19" x 48", Two 32 Watt, Lamps,14 Gauge, Maximum Security Surface Luminaire Note: Includes one electronic ballast for T8 lamps, 0.005" UV absorbing inner layer overlay, 0.375" clear polycarbonate environmental side.	1,344.06	48.23
26 55 63 00-0027	EA	19" x 48", Three 32 Watt, Lamps,14 Gauge, Ultimax Surface Luminaire Note: Includes one electronic ballast for T8 lamps, 0.005" UV absorbing inner layer overlay, 0.375" clear polycarbonate environmental side.	1,375.83	48.23
26 55 63 00-0028	EA	16" x 48", Four 32 Watt, T8 Fluorescent Lamps, 14 Gauge, Maximum Security Surface Luminaire Note: Includes one electronic ballast for T8 lamps, 0.005" UV absorbing inner layer overlay, 0.375" clear polycarbonate environmental side.	1,375.83	48.23
26 55 63 00-0029		Ultimax Surface Luminaire *(26 55 63)* Note: Failsafe - FMR series.		
26 55 63 00-0030	EA	12" x 48", Two 32 Watt, T8 Fluorescent Lamps, 16 Gauge, Ultimax Surface Luminaire Note: Includes one electronic ballast for T8 lamps, 0.125" prismatic acrylic fixture side lens and 0.250" clear tempered glass environmental side lens.	1,077.59	37.09

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 55 63 00-0031	EA	12" x 48", Three 32 Watt, T8 Fluorescent Lamps, 16 Gauge, Ultimax Surface Luminaire Note: Includes one electronic ballast for T8 lamps, 0.125" prismatic acrylic fixture side lens and 0.250" clear tempered glass environmental side lens.	1,400.40	37.09
26 55 63 00-0032	EA	24" x 24", Two 17 Watt, T8 Fluorescent Lamps, 16 Gauge, Ultimax Surface Luminaire Note: Includes one electronic ballast for T8 lamps, 0.125" prismatic acrylic fixture side lens and 0.250" clear tempered glass environmental side lens.	1,196.96	44.53
26 55 63 00-0033	EA	24" x 48", Two 32 Watt, T8 Fluorescent Lamps, 16 Gauge, Ultimax Surface Luminaire Note: Includes one electronic ballast for T8 lamps, 0.125" prismatic acrylic fixture side lens and 0.250" clear tempered glass environmental side lens.	1,227.22	51.94
26 55 63 00-0034	EA	24" x 48", Three 32 Watt, T8 Fluorescent Lamps, 16 Gauge, Ultimax Surface Luminaire Note: Includes one electronic ballast for T8 lamps, 0.125" prismatic acrylic fixture side lens and 0.250" clear tempered glass environmental side lens.	1,232.35	51.94
26 55 63 00-0035	EA	24" x 48", Four 32 Watt, T8 Fluorescent Lamps, 16 Gauge, Ultimax Surface Luminaire Note: Includes one electronic ballast for T8 lamps, 0.125" prismatic acrylic fixture side lens and 0.250" clear tempered glass environmental side lens.	1,237.48	51.94
26 55 63 00-0036		Maximum Security Wall Luminaire *(26 55 63)* Note: Failsafe - FMR series.		
26 55 63 00-0037	EA	10.5" x 48", Two 32 Watt Lamps, 14 Gauge, Maximum Security Wall Luminaire Note: 1 up, 1 down, 1 electronic ballast for T8 lamps. 0.005" UV absorbing inner level overlay, 0.375" clear polycarbonate environmental side.	1,422.45	37.23
26 55 63 00-0038	EA	10.5" x 48", Three 32 Watt, T8 Lamps, 14 Gauge, Maximum Security Wall Luminaire Note: 1 up, 2 down, 1 electronic ballast for T8 lamps. 0.005" UV absorbing inner level overlay, 0.375" clear polycarbonate environmental side.	1,422.45	37.23
26 55 63 00-0039	EA	10.5" x 48", Four 32 Watt, T8 Lamps, 14 Gauge, Maximum Security Wall Luminaire Note: 2 up, 2 down, 1 electronic ballast for T8 lamps. 0.005" UV absorbing inner level overlay, 0.375" clear polycarbonate environmental side.	1,422.45	37.23
26 55 68		**Athletic Field Lighting** *(26 55)*		
26 55 68 00-0001		Sports Lighting System *(26 55 68)* Note: Musco.		
26 55 68 00-0002		Round Steel Tapered Poles *(26 55 68 00-0001)* Note: With Internal wiring harness.		
26 55 68 00-0003	EA	20' Steel Tapered Pole With Precast Concrete Foundation Sleeve	4,177.04	623.87
26 55 68 00-0004	EA	25' Steel Tapered Pole With Precast Concrete Foundation Sleeve	5,025.12	753.84
26 55 68 00-0005	EA	30' Steel Tapered Pole With Precast Concrete Foundation Sleeve	5,674.93	818.84
26 55 68 00-0006	EA	35' Steel Tapered Pole With Precast Concrete Foundation Sleeve	6,221.80	851.33
26 55 68 00-0007	EA	40' Steel Tapered Pole With Precast Concrete Foundation Sleeve	7,872.85	883.82
26 55 68 00-0008	EA	45' Steel Tapered Pole With Precast Concrete Foundation Sleeve	9,011.64	1,078.78
26 55 68 00-0009	EA	50' Steel Tapered Pole With Precast Concrete Foundation Sleeve	9,689.94	1,143.77
26 55 68 00-0010	EA	55' Steel Tapered Pole With Precast Concrete Foundation Sleeve	11,007.13	1,299.74
26 55 68 00-0011	EA	60' Steel Tapered Pole With Precast Concrete Foundation Sleeve	12,501.83	1,462.21
26 55 68 00-0012	EA	65' Steel Tapered Pole With Precast Concrete Foundation Sleeve	13,818.55	1,608.80
26 55 68 00-0013	EA	70' Steel Tapered Pole With Precast Concrete Foundation Sleeve	15,056.14	1,798.06
26 55 68 00-0014	EA	75' Steel Tapered Pole With Precast Concrete Foundation Sleeve	16,393.37	2,018.87
26 55 68 00-0015	EA	80' Steel Tapered Pole With Precast Concrete Foundation Sleeve	18,328.45	2,428.96
26 55 68 00-0016		Steel Pole Brackets *(26 55 68 00-0001)*		
26 55 68 00-0017	EA	Two Light Bracket	667.27	64.98
26 55 68 00-0018	EA	Three Light Bracket	838.07	90.98
26 55 68 00-0019	EA	Four Light Bracket	1,213.55	110.47
26 55 68 00-0020	EA	Five Light Bracket	1,380.40	129.97
26 55 68 00-0021	EA	Six Light Bracket	1,676.34	149.47
26 55 68 00-0022	EA	Seven Light Bracket	1,919.57	168.97
26 55 68 00-0023	EA	Eight Light Bracket	2,195.85	194.96
26 55 68 00-0024	EA	Nine Light Bracket	2,482.13	214.46
26 55 68 00-0025		Light Fixtures *(26 55 68 00-0001)*		
26 55 68 00-0026	EA	120 or 270 Volt, Sportlite Fixtures Complete with 1,000 Watt Metal Halide Lamp, Hook Cord And Plug	1,400.67	
		For 1,500 Watt Metal Halide Lamp, Add	*16.01*	
26 55 68 00-0027		Electrical Component Enclosure *(26 55 68 00-0001)* Note: Pole mounted NEMA 3R enclosure with thermal magnetic breaker and multiple ballasts to match total light fixtures. For light structures with more than 6 lights, use multiple enclosures.		
26 55 68 00-0028	EA	Electrical Component Enclosure For 2 Lights, Pole Mounted	1,051.82	73.32
26 55 68 00-0029	EA	Electrical Component Enclosure For 3 Lights, Pole Mounted	1,577.33	112.80
26 55 68 00-0030	EA	Electrical Component Enclosure For 4 Lights, Pole Mounted	1,810.70	141.01
26 55 68 00-0031	EA	Electrical Component Enclosure For 5 Lights, Pole Mounted	2,343.44	157.93
26 55 68 00-0032	EA	Electrical Component Enclosure For 6 Lights, Pole Mounted	2,637.15	169.20
26 55 68 00-0033		Accessories *(26 55 68 00-0001)*		
26 55 68 00-0034	EA	Time Delay Kit (Musco®)	1,016.94	225.99
26 55 68 00-0035	EA	Remote Switch Box Push Button (Musco®)	2,146.82	225.99
26 55 68 00-0036	EA	Push Button Strobe Kit (Musco®)	2,598.78	225.99
26 55 68 00-0037	EA	Additional Control-Link Unit (Musco®)	12,654.81	677.99

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 55 68 00-0038	EA	Auxiliary Brackets For Speakers Or Egress Fixtures, For New Installations (Musco®)	1,355.48	112.80
26 55 68 00-0039	EA	Auxiliary Brackets For Speakers Or Egress Fixtures, For Retrofit Applications (Musco®)	1,581.08	225.60

26 56 Exterior Lighting *(26 50)*

26 56 13 Lighting Poles and Standards *(26 56)*

26 56 13 00-0001 Poles And Standards *(26 56 13)*
See CSI section 26 05 46 00-0000 for additional poles, 26 05 46 00-0001 for additional pole.

26 56 13 00-0002 Roadway Light Poles *(26 56 13 00-0001)*
Note: Excludes lighting fixtures.

26 56 13 00-0003 Steel Roadway Light Poles *(26 56 13 00-0002)*
Note: Includes prime painted finish, anchor bolts, steel base with nut covers, reinforced handhole with cover and grounding provisions, and fixture arm(s).

26 56 13 00-0004 Round Tapered, Steel Roadway Light Poles *(26 56 13 00-0003)*

26 56 13 00-0005 Round Tapered, Steel Roadway Light Poles With Upsweep Style Arms *(26 56 13 00-0004)*

26 56 13 00-0006 Round Tapered, Steel Roadway Light Poles With Single Upsweep Style Arm *(26 56 13 00-0005)*

26 56 13 00-0007	EA	20' High, 5.9" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Single 4' Upsweep Style Arm, Anchor Base	2,696.52	389.92
		For Galvanized Finish, Add	*57.50*	
		For >10 To 20, Deduct	*-67.41*	
		For >20 To 40, Deduct	*-134.83*	
		For >40, Deduct	*-221.74*	
26 56 13 00-0008	EA	20' High, 5.9" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Single 6' Upsweep Style Arm, Anchor Base	2,701.26	389.92
		For Galvanized Finish, Add	*57.64*	
		For >10 To 20, Deduct	*-67.53*	
		For >20 To 40, Deduct	*-135.06*	
		For >40, Deduct	*-222.09*	
26 56 13 00-0009	EA	25' High, 5.9" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Single 4' Upsweep Style Arm, Anchor Base	2,989.28	519.90
		For Galvanized Finish, Add	*58.48*	
		For >10 To 20, Deduct	*-74.73*	
		For >20 To 40, Deduct	*-149.46*	
		For >40, Deduct	*-250.19*	
26 56 13 00-0010	EA	25' High, 5.9" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Single 6' Upsweep Style Arm, Anchor Base	3,046.24	519.90
		For Galvanized Finish, Add	*60.19*	
		For >10 To 20, Deduct	*-76.16*	
		For >20 To 40, Deduct	*-152.31*	
		For >40, Deduct	*-254.46*	
26 56 13 00-0011	EA	25' High, 5.9" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Single 8' Upsweep Style Arm, Anchor Base	3,103.21	519.90
		For Galvanized Finish, Add	*61.90*	
		For >10 To 20, Deduct	*-77.58*	
		For >20 To 40, Deduct	*-155.16*	
		For >40, Deduct	*-258.74*	
26 56 13 00-0012	EA	30' High, 6.6" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Single 4' Upsweep Style Arm, Anchor Base	3,245.18	584.88
		For Galvanized Finish, Add	*62.26*	
		For >10 To 20, Deduct	*-81.13*	
		For >20 To 40, Deduct	*-162.26*	
		For >40, Deduct	*-272.63*	
26 56 13 00-0013	EA	30' High, 6.6" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Single 6' Upsweep Style Arm, Anchor Base	3,272.20	584.88
		For Galvanized Finish, Add	*63.07*	
		For >10 To 20, Deduct	*-81.81*	
		For >20 To 40, Deduct	*-163.61*	
		For >40, Deduct	*-274.66*	
26 56 13 00-0014	EA	30' High, 6.6" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Single 8' Upsweep Style Arm, Anchor Base	3,277.34	584.88
		For Galvanized Finish, Add	*63.23*	
		For >10 To 20, Deduct	*-81.93*	
		For >20 To 40, Deduct	*-163.87*	
		For >40, Deduct	*-275.04*	
26 56 13 00-0015	EA	35' High, 7.3" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Single 4' Upsweep Style Arm, Anchor Base	3,438.21	617.38
		For Galvanized Finish, Add	*66.10*	
		For >10 To 20, Deduct	*-85.96*	
		For >20 To 40, Deduct	*-171.91*	
		For >40, Deduct	*-288.73*	
26 56 13 00-0016	EA	35' High, 7.3" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Single 6' Upsweep Style Arm, Anchor Base	3,458.61	617.38
		For Galvanized Finish, Add	*66.72*	
		For >10 To 20, Deduct	*-86.47*	
		For >20 To 40, Deduct	*-172.93*	
		For >40, Deduct	*-290.26*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0017	EA	35' High, 7.3" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Single 8' Upsweep Style Arm, Anchor Base	3,480.89	617.38
		For Galvanized Finish, Add	*67.38*	
		For >10 To 20, Deduct	*-87.02*	
		For >20 To 40, Deduct	*-174.04*	
		For >40, Deduct	*-291.94*	
26 56 13 00-0018	EA	40' High, 9.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Single 4' Upsweep Style Arm, Anchor Base	3,944.95	649.87
		For Galvanized Finish, Add	*79.36*	
		For >10 To 20, Deduct	*-98.62*	
		For >20 To 40, Deduct	*-197.25*	
		For >40, Deduct	*-328.36*	
26 56 13 00-0019	EA	40' High, 9.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Single 6' Upsweep Style Arm, Anchor Base	3,952.22	649.87
		For Galvanized Finish, Add	*79.57*	
		For >10 To 20, Deduct	*-98.81*	
		For >20 To 40, Deduct	*-197.61*	
		For >40, Deduct	*-328.91*	
26 56 13 00-0020	EA	40' High, 9.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Single 8' Upsweep Style Arm, Anchor Base	3,959.40	649.87
		For Galvanized Finish, Add	*79.79*	
		For >10 To 20, Deduct	*-98.99*	
		For >20 To 40, Deduct	*-197.97*	
		For >40, Deduct	*-329.45*	

26 56 13 00-0021 Round Tapered, Steel Roadway Light Poles With Two Upsweep Style Arms *(26 56 13 00-0005)*

26 56 13 00-0022	EA	20' High, 5.9" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Two 4' Upsweep Style Arms, Anchor Base	3,343.50	454.90
		For Galvanized Finish, Add	*73.01*	
		For >10 To 20, Deduct	*-83.59*	
		For >20 To 40, Deduct	*-167.18*	
		For >40, Deduct	*-273.51*	
26 56 13 00-0023	EA	20' High, 5.9" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Two 6' Upsweep Style Arms, Anchor Base	3,406.43	471.15
		For Galvanized Finish, Add	*73.92*	
		For >10 To 20, Deduct	*-85.16*	
		For >20 To 40, Deduct	*-170.32*	
		For >40, Deduct	*-279.04*	
26 56 13 00-0024	EA	20' High, 5.9" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Two 8' Upsweep Style Arms, Anchor Base	3,461.85	487.41
		For Galvanized Finish, Add	*74.61*	
		For >10 To 20, Deduct	*-86.55*	
		For >20 To 40, Deduct	*-173.09*	
		For >40, Deduct	*-284.01*	
26 56 13 00-0025	EA	25' High, 5.9" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Two 4' Upsweep Style Arms, Anchor Base	3,406.12	584.88
		For Galvanized Finish, Add	*67.09*	
		For >10 To 20, Deduct	*-85.15*	
		For >20 To 40, Deduct	*-170.31*	
		For >40, Deduct	*-284.70*	
26 56 13 00-0026	EA	25' High, 5.9" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Two 6' Upsweep Style Arms, Anchor Base	3,450.69	601.13
		For Galvanized Finish, Add	*67.45*	
		For >10 To 20, Deduct	*-86.27*	
		For >20 To 40, Deduct	*-172.53*	
		For >40, Deduct	*-288.86*	
26 56 13 00-0027	EA	25' High, 5.9" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Two 8' Upsweep Style Arms, Anchor Base	3,488.07	617.38
		For Galvanized Finish, Add	*67.60*	
		For >10 To 20, Deduct	*-87.20*	
		For >20 To 40, Deduct	*-174.40*	
		For >40, Deduct	*-292.47*	
26 56 13 00-0028	EA	30' High, 6.6" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Two 4' Upsweep Style Arms, Anchor Base	3,685.27	649.87
		For Galvanized Finish, Add	*71.57*	
		For >10 To 20, Deduct	*-92.13*	
		For >20 To 40, Deduct	*-184.26*	
		For >40, Deduct	*-308.89*	
26 56 13 00-0029	EA	30' High, 6.6" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Two 6' Upsweep Style Arms, Anchor Base	3,725.11	666.11
		For Galvanized Finish, Add	*71.79*	
		For >10 To 20, Deduct	*-93.13*	
		For >20 To 40, Deduct	*-186.26*	
		For >40, Deduct	*-312.69*	
26 56 13 00-0030	EA	30' High, 6.6" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Two 8' Upsweep Style Arms, Anchor Base	3,762.25	682.36
		For Galvanized Finish, Add	*71.93*	
		For >10 To 20, Deduct	*-94.06*	
		For >20 To 40, Deduct	*-188.11*	
		For >40, Deduct	*-316.29*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0031	EA	35' High, 7.3" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Two 4' Upsweep Style Arms, Anchor Base	3,906.53	682.36
		For Galvanized Finish, Add	*76.25*	
		For >10 To 20, Deduct	*-97.66*	
		For >20 To 40, Deduct	*-195.33*	
		For >40, Deduct	*-327.11*	
26 56 13 00-0032	EA	35' High, 7.3" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Two 6' Upsweep Style Arms, Anchor Base	3,970.61	698.61
		For Galvanized Finish, Add	*77.20*	
		For >10 To 20, Deduct	*-99.27*	
		For >20 To 40, Deduct	*-198.53*	
		For >40, Deduct	*-332.73*	
26 56 13 00-0033	EA	35' High, 7.3" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Two 8' Upsweep Style Arms, Anchor Base	4,033.06	714.85
		For Galvanized Finish, Add	*78.10*	
		For >10 To 20, Deduct	*-100.83*	
		For >20 To 40, Deduct	*-201.65*	
		For >40, Deduct	*-338.22*	
26 56 13 00-0034	EA	40' High, 9.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Two 4' Upsweep Style Arms, Anchor Base	4,385.20	714.85
		For Galvanized Finish, Add	*88.66*	
		For >10 To 20, Deduct	*-109.63*	
		For >20 To 40, Deduct	*-219.26*	
		For >40, Deduct	*-364.63*	
26 56 13 00-0035	EA	40' High, 9.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Two 6' Upsweep Style Arms, Anchor Base	4,422.43	731.10
		For Galvanized Finish, Add	*88.81*	
		For >10 To 20, Deduct	*-110.56*	
		For >20 To 40, Deduct	*-221.12*	
		For >40, Deduct	*-368.24*	
26 56 13 00-0036	EA	40' High, 9.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Two 8' Upsweep Style Arms, Anchor Base	4,459.82	747.35
		For Galvanized Finish, Add	*88.95*	
		For >10 To 20, Deduct	*-111.50*	
		For >20 To 40, Deduct	*-222.99*	
		For >40, Deduct	*-371.85*	

26 56 13 00-0037 Round Tapered, Steel Roadway Light Poles With Three Upsweep Style Arms *(26 56 13 00-0005)*

26 56 13 00-0038	EA	25' High, 7.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Three 4' Upsweep Style Arms, Anchor Base	3,983.47	649.87
		For Galvanized Finish, Add	*80.51*	
		For >10 To 20, Deduct	*-99.59*	
		For >20 To 40, Deduct	*-199.17*	
		For >40, Deduct	*-331.25*	
26 56 13 00-0039	EA	25' High, 7.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Three 6' Upsweep Style Arms, Anchor Base	4,053.27	682.36
		For Galvanized Finish, Add	*80.66*	
		For >10 To 20, Deduct	*-101.33*	
		For >20 To 40, Deduct	*-202.66*	
		For >40, Deduct	*-338.11*	
26 56 13 00-0040	EA	25' High, 7.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Three 8' Upsweep Style Arms, Anchor Base	4,130.25	714.85
		For Galvanized Finish, Add	*81.02*	
		For >10 To 20, Deduct	*-103.26*	
		For >20 To 40, Deduct	*-206.51*	
		For >40, Deduct	*-345.51*	
26 56 13 00-0041	EA	30' High, 7.5" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Three 4' Upsweep Style Arms, Anchor Base	4,233.73	714.85
		For Galvanized Finish, Add	*84.12*	
		For >10 To 20, Deduct	*-105.84*	
		For >20 To 40, Deduct	*-211.69*	
		For >40, Deduct	*-353.27*	
26 56 13 00-0042	EA	30' High, 7.5" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Three 6' Upsweep Style Arms, Anchor Base	4,305.82	747.35
		For Galvanized Finish, Add	*84.33*	
		For >10 To 20, Deduct	*-107.65*	
		For >20 To 40, Deduct	*-215.29*	
		For >40, Deduct	*-360.30*	
26 56 13 00-0043	EA	30' High, 7.5" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Three 8' Upsweep Style Arms, Anchor Base	4,375.63	779.84
		For Galvanized Finish, Add	*84.48*	
		For >10 To 20, Deduct	*-109.39*	
		For >20 To 40, Deduct	*-218.78*	
		For >40, Deduct	*-367.16*	
26 56 13 00-0044	EA	35' High, 8.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Three 4' Upsweep Style Arms, Anchor Base	4,495.73	747.35
		For Galvanized Finish, Add	*90.03*	
		For >10 To 20, Deduct	*-112.39*	
		For >20 To 40, Deduct	*-224.79*	
		For >40, Deduct	*-374.55*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0045	EA	35' High, 8.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Three 6' Upsweep Style Arms, Anchor Base	4,565.53	779.84
		For Galvanized Finish, Add	*90.18*	
		For >10 To 20, Deduct	*-114.14*	
		For >20 To 40, Deduct	*-228.28*	
		For >40, Deduct	*-381.41*	
26 56 13 00-0046	EA	35' High, 8.5" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Three 8' Upsweep Style Arms, Anchor Base	4,635.33	812.34
		For Galvanized Finish, Add	*90.32*	
		For >10 To 20, Deduct	*-115.88*	
		For >20 To 40, Deduct	*-231.77*	
		For >40, Deduct	*-388.27*	
26 56 13 00-0047	EA	40' High, 9.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Three 4' Upsweep Style Arms, Anchor Base	4,825.46	779.84
		For Galvanized Finish, Add	*97.97*	
		For >10 To 20, Deduct	*-120.64*	
		For >20 To 40, Deduct	*-241.27*	
		For >40, Deduct	*-400.90*	
26 56 13 00-0048	EA	40' High, 9.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Three 6' Upsweep Style Arms, Anchor Base	4,895.01	812.34
		For Galvanized Finish, Add	*98.11*	
		For >10 To 20, Deduct	*-122.38*	
		For >20 To 40, Deduct	*-244.75*	
		For >40, Deduct	*-407.74*	
26 56 13 00-0049	EA	40' High, 9.5" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Three 8' Upsweep Style Arms, Anchor Base	4,969.63	844.83
		For Galvanized Finish, Add	*98.40*	
		For >10 To 20, Deduct	*-124.24*	
		For >20 To 40, Deduct	*-248.48*	
		For >40, Deduct	*-414.96*	

26 56 13 00-0050 Round Tapered, Steel Roadway Light Poles With Four Upsweep Style Arms *(26 56 13 00-0005)*

26 56 13 00-0051	EA	25' High, 7.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Four 4' Upsweep Style Arms, Anchor Base	4,426.09	714.85
		For Galvanized Finish, Add	*89.89*	
		For >10 To 20, Deduct	*-110.65*	
		For >20 To 40, Deduct	*-221.30*	
		For >40, Deduct	*-367.70*	
26 56 13 00-0052	EA	25' High, 7.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Four 6' Upsweep Style Arms, Anchor Base	4,530.75	763.59
		For Galvanized Finish, Add	*90.11*	
		For >10 To 20, Deduct	*-113.27*	
		For >20 To 40, Deduct	*-226.54*	
		For >40, Deduct	*-377.99*	
26 56 13 00-0053	EA	25' High, 7.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Four 8' Upsweep Style Arms, Anchor Base	4,632.96	812.34
		For Galvanized Finish, Add	*90.25*	
		For >10 To 20, Deduct	*-115.82*	
		For >20 To 40, Deduct	*-231.65*	
		For >40, Deduct	*-388.09*	
26 56 13 00-0054	EA	30' High, 8.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Four 4' Upsweep Style Arms, Anchor Base	4,705.82	779.84
		For Galvanized Finish, Add	*94.38*	
		For >10 To 20, Deduct	*-117.65*	
		For >20 To 40, Deduct	*-235.29*	
		For >40, Deduct	*-391.93*	
26 56 13 00-0055	EA	30' High, 8.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Four 6' Upsweep Style Arms, Anchor Base	4,808.35	828.59
		For Galvanized Finish, Add	*94.54*	
		For >10 To 20, Deduct	*-120.21*	
		For >20 To 40, Deduct	*-240.42*	
		For >40, Deduct	*-402.06*	
26 56 13 00-0056	EA	30' High, 8.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Four 8' Upsweep Style Arms, Anchor Base	4,883.14	877.33
		For Galvanized Finish, Add	*93.86*	
		For >10 To 20, Deduct	*-122.08*	
		For >20 To 40, Deduct	*-244.16*	
		For >40, Deduct	*-410.10*	
26 56 13 00-0057	EA	35' High, 9.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Four 4' Upsweep Style Arms, Anchor Base	5,044.11	812.34
		For Galvanized Finish, Add	*102.58*	
		For >10 To 20, Deduct	*-126.10*	
		For >20 To 40, Deduct	*-252.21*	
		For >40, Deduct	*-418.93*	
26 56 13 00-0058	EA	35' High, 9.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Four 6' Upsweep Style Arms, Anchor Base	5,179.13	861.08
		For Galvanized Finish, Add	*103.71*	
		For >10 To 20, Deduct	*-129.48*	
		For >20 To 40, Deduct	*-258.96*	
		For >40, Deduct	*-431.49*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0059	EA	35' High, 9.5" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Four 8' Upsweep Style Arms, Anchor Base	5,251.23	909.82
		For Galvanized Finish, Add	*102.95*	
		For >10 To 20, Deduct	*-131.28*	
		For >20 To 40, Deduct	*-262.56*	
		For >40, Deduct	*-439.33*	
26 56 13 00-0060	EA	40' High, 10.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Four 4' Upsweep Style Arms, Anchor Base	5,265.47	844.83
		For Galvanized Finish, Add	*107.27*	
		For >10 To 20, Deduct	*-131.64*	
		For >20 To 40, Deduct	*-263.27*	
		For >40, Deduct	*-437.15*	
26 56 13 00-0061	EA	40' High, 10.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Four 6' Upsweep Style Arms, Anchor Base	5,367.68	893.57
		For Galvanized Finish, Add	*107.42*	
		For >10 To 20, Deduct	*-134.19*	
		For >20 To 40, Deduct	*-268.38*	
		For >40, Deduct	*-447.25*	
26 56 13 00-0062	EA	40' High, 10.5" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Four 8' Upsweep Style Arms, Anchor Base	5,472.34	942.31
		For Galvanized Finish, Add	*107.63*	
		For >10 To 20, Deduct	*-136.81*	
		For >20 To 40, Deduct	*-273.62*	
		For >40, Deduct	*-457.54*	

26 56 13 00-0063 Round Tapered, Steel Roadway Light Poles With Davit Style Arm *(26 56 13 00-0004)*

26 56 13 00-0064 Round Tapered, Steel Roadway Light Poles With Single Davit Style Arm *(26 56 13 00-0063)*

26 56 13 00-0065	EA	25' High, 6.4" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Single 6.5' Davit Style Arm, Anchor Base	3,165.56	519.90
		For Galvanized Finish, Add	*63.77*	
		For >10 To 20, Deduct	*-79.14*	
		For >20 To 40, Deduct	*-158.28*	
		For >40, Deduct	*-263.41*	
26 56 13 00-0066	EA	30' High, 7.1" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Single 6.5' Davit Style Arm, Anchor Base	3,580.44	584.88
		For Galvanized Finish, Add	*72.32*	
		For >10 To 20, Deduct	*-89.51*	
		For >20 To 40, Deduct	*-179.02*	
		For >40, Deduct	*-297.78*	
26 56 13 00-0067	EA	35' High, 7.8" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Single 6.5' Davit Style Arm, Anchor Base	3,685.08	617.38
		For Galvanized Finish, Add	*73.51*	
		For >10 To 20, Deduct	*-92.13*	
		For >20 To 40, Deduct	*-184.25*	
		For >40, Deduct	*-307.25*	
26 56 13 00-0068	EA	40' High, 9.5" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Single 6.5' Davit Style Arm, Anchor Base	4,358.55	649.87
		For Galvanized Finish, Add	*91.76*	
		For >10 To 20, Deduct	*-108.96*	
		For >20 To 40, Deduct	*-217.93*	
		For >40, Deduct	*-359.38*	

26 56 13 00-0069 Round Tapered, Steel Roadway Light Poles With Truss Style Arms *(26 56 13 00-0004)*

26 56 13 00-0070 Round Tapered, Steel Roadway Light Poles With Single Truss Style Arm *(26 56 13 00-0069)*

26 56 13 00-0071	EA	25' High, 6.5" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Single 10' Truss Style Arm, Anchor Base	4,016.50	519.90
		For Galvanized Finish, Add	*89.30*	
		For >10 To 20, Deduct	*-100.41*	
		For >20 To 40, Deduct	*-200.83*	
		For >40, Deduct	*-327.23*	
26 56 13 00-0072	EA	25' High, 6.5" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Single 12' Truss Style Arm, Anchor Base	4,052.98	519.90
		For Galvanized Finish, Add	*90.40*	
		For >10 To 20, Deduct	*-101.32*	
		For >20 To 40, Deduct	*-202.65*	
		For >40, Deduct	*-329.97*	
26 56 13 00-0073	EA	25' High, 7.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Single 15' Truss Style Arm, Anchor Base	4,069.63	519.90
		For Galvanized Finish, Add	*90.90*	
		For >10 To 20, Deduct	*-101.74*	
		For >20 To 40, Deduct	*-203.48*	
		For >40, Deduct	*-331.22*	
26 56 13 00-0074	EA	30' High, 7.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Single 10' Truss Style Arm, Anchor Base	4,182.96	584.88
		For Galvanized Finish, Add	*90.40*	
		For >10 To 20, Deduct	*-104.57*	
		For >20 To 40, Deduct	*-209.15*	
		For >40, Deduct	*-342.97*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0075	EA	30' High, 7.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Single 12' Truss Style Arm, Anchor Base	4,189.33	584.88
		For Galvanized Finish, Add	*90.59*	
		For >10 To 20, Deduct	*-104.73*	
		For >20 To 40, Deduct	*-209.47*	
		For >40, Deduct	*-343.44*	
26 56 13 00-0076	EA	30' High, 7.5" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Single 15' Truss Style Arm, Anchor Base	4,255.10	584.88
		For Galvanized Finish, Add	*92.56*	
		For >10 To 20, Deduct	*-106.38*	
		For >20 To 40, Deduct	*-212.76*	
		For >40, Deduct	*-348.38*	
26 56 13 00-0077	EA	35' High, 8.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Single 10' Truss Style Arm, Anchor Base	4,269.57	617.38
		For Galvanized Finish, Add	*91.04*	
		For >10 To 20, Deduct	*-106.74*	
		For >20 To 40, Deduct	*-213.48*	
		For >40, Deduct	*-351.09*	
26 56 13 00-0078	EA	35' High, 8.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Single 12' Truss Style Arm, Anchor Base	4,308.09	617.38
		For Galvanized Finish, Add	*92.20*	
		For >10 To 20, Deduct	*-107.70*	
		For >20 To 40, Deduct	*-215.40*	
		For >40, Deduct	*-353.98*	
26 56 13 00-0079	EA	35' High, 8.5" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Single 15' Truss Style Arm, Anchor Base	4,510.07	617.38
		For Galvanized Finish, Add	*98.26*	
		For >10 To 20, Deduct	*-112.75*	
		For >20 To 40, Deduct	*-225.50*	
		For >40, Deduct	*-369.12*	

26 56 13 00-0080 Round Tapered, Steel Roadway Light Poles With Two Truss Style Arms *(26 56 13 00-0069)*

26 56 13 00-0081	EA	25' High, 6.5" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Two 10' Truss Style Arms, Anchor Base	5,246.95	649.87
		For Galvanized Finish, Add	*118.42*	
		For >10 To 20, Deduct	*-131.17*	
		For >20 To 40, Deduct	*-262.35*	
		For >40, Deduct	*-426.01*	
26 56 13 00-0082	EA	25' High, 6.5" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Two 12' Truss Style Arms, Anchor Base	5,346.86	682.36
		For Galvanized Finish, Add	*119.46*	
		For >10 To 20, Deduct	*-133.67*	
		For >20 To 40, Deduct	*-267.34*	
		For >40, Deduct	*-435.13*	
26 56 13 00-0083	EA	25' High, 7.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Two 15' Truss Style Arms, Anchor Base	5,548.95	714.85
		For Galvanized Finish, Add	*123.58*	
		For >10 To 20, Deduct	*-138.72*	
		For >20 To 40, Deduct	*-277.45*	
		For >40, Deduct	*-451.91*	
26 56 13 00-0084	EA	30' High, 7.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Two 10' Truss Style Arms, Anchor Base	5,356.68	714.85
		For Galvanized Finish, Add	*117.81*	
		For >10 To 20, Deduct	*-133.92*	
		For >20 To 40, Deduct	*-267.83*	
		For >40, Deduct	*-437.49*	
26 56 13 00-0085	EA	30' High, 7.5" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Two 12' Truss Style Arms, Anchor Base	5,602.11	747.35
		For Galvanized Finish, Add	*123.22*	
		For >10 To 20, Deduct	*-140.05*	
		For >20 To 40, Deduct	*-280.11*	
		For >40, Deduct	*-457.53*	
26 56 13 00-0086	EA	30' High, 8.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Two 15' Truss Style Arms, Anchor Base	5,755.89	779.84
		For Galvanized Finish, Add	*125.89*	
		For >10 To 20, Deduct	*-143.90*	
		For >20 To 40, Deduct	*-287.79*	
		For >40, Deduct	*-470.68*	
26 56 13 00-0087	EA	35' High, 8.0" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Two 10' Truss Style Arms, Anchor Base	5,522.46	747.35
		For Galvanized Finish, Add	*120.83*	
		For >10 To 20, Deduct	*-138.06*	
		For >20 To 40, Deduct	*-276.12*	
		For >40, Deduct	*-451.55*	
26 56 13 00-0088	EA	35' High, 8.5" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Two 12' Truss Style Arms, Anchor Base	5,844.85	779.84
		For Galvanized Finish, Add	*128.55*	
		For >10 To 20, Deduct	*-146.12*	
		For >20 To 40, Deduct	*-292.24*	
		For >40, Deduct	*-477.36*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0089	EA	35' High, 8.5" Base OD, 7 Gauge, Round Tapered, Steel Roadway Light Pole With Two 15' Truss Style Arms, Anchor Base	6,042.03	812.34
		For Galvanized Finish, Add	*132.52*	
		For >10 To 20, Deduct	*-151.05*	
		For >20 To 40, Deduct	*-302.10*	
		For >40, Deduct	*-493.77*	

26 56 13 00-0090 Aluminum Roadway Light Poles *(26 56 13 00-0002)*

Note: Includes satin finish, anchor bolts, cast aluminum base with nut covers, reinforced handhole with cover and grounding provisions, and fixture arm(s).

26 56 13 00-0091 Round Tapered, Aluminum Roadway Light Poles *(26 56 13 00-0090)*

26 56 13 00-0092 Round Tapered, Aluminum Roadway Light Poles With Upsweep Style Arms *(26 56 13 00-0091)*

26 56 13 00-0093 Round Tapered, Aluminum Roadway Light Poles With Single Upsweep Style Arm *(26 56 13 00-0092)*

26 56 13 00-0094	EA	20' High, 6" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 4' Upsweep Style Arm, Anchor Base	2,629.68	389.92
		For >10 To 20, Deduct	*-65.74*	
		For >20 To 40, Deduct	*-131.48*	
		For >40, Deduct	*-216.72*	
26 56 13 00-0095	EA	20' High, 6" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 6' Upsweep Style Arm, Anchor Base	2,652.07	389.92
		For >10 To 20, Deduct	*-66.30*	
		For >20 To 40, Deduct	*-132.60*	
		For >40, Deduct	*-218.40*	
26 56 13 00-0096	EA	25' High, 7" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 4' Upsweep Style Arm, Anchor Base	3,227.64	519.90
		For >10 To 20, Deduct	*-80.69*	
		For >20 To 40, Deduct	*-161.38*	
		For >40, Deduct	*-268.07*	
26 56 13 00-0097	EA	25' High, 7" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 6' Upsweep Style Arm, Anchor Base	3,269.95	519.90
		For >10 To 20, Deduct	*-81.75*	
		For >20 To 40, Deduct	*-163.50*	
		For >40, Deduct	*-271.24*	
26 56 13 00-0098	EA	25' High, 7" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 8' Upsweep Style Arm, Anchor Base	3,308.86	519.90
		For >10 To 20, Deduct	*-82.72*	
		For >20 To 40, Deduct	*-165.44*	
		For >40, Deduct	*-274.16*	
26 56 13 00-0099	EA	30' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 4' Upsweep Style Arm, Anchor Base	3,703.80	584.88
		For >10 To 20, Deduct	*-92.60*	
		For >20 To 40, Deduct	*-185.19*	
		For >40, Deduct	*-307.03*	
26 56 13 00-0100	EA	30' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 6' Upsweep Style Arm, Anchor Base	3,739.50	584.88
		For >10 To 20, Deduct	*-93.49*	
		For >20 To 40, Deduct	*-186.98*	
		For >40, Deduct	*-309.71*	
26 56 13 00-0101	EA	30' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 8' Upsweep Style Arm, Anchor Base	3,779.42	584.88
		For >10 To 20, Deduct	*-94.49*	
		For >20 To 40, Deduct	*-188.97*	
		For >40, Deduct	*-312.70*	
26 56 13 00-0102	EA	35' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 4' Upsweep Style Arm, Anchor Base	4,333.57	617.38
		For >10 To 20, Deduct	*-108.34*	
		For >20 To 40, Deduct	*-216.68*	
		For >40, Deduct	*-355.89*	
26 56 13 00-0103	EA	35' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 6' Upsweep Style Arm, Anchor Base	4,369.18	617.38
		For >10 To 20, Deduct	*-109.23*	
		For >20 To 40, Deduct	*-218.46*	
		For >40, Deduct	*-358.56*	
26 56 13 00-0104	EA	35' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 8' Upsweep Style Arm, Anchor Base	4,399.00	617.38
		For >10 To 20, Deduct	*-109.98*	
		For >20 To 40, Deduct	*-219.95*	
		For >40, Deduct	*-360.79*	

26 56 13 00-0105 Round Tapered, Aluminum Roadway Light Poles With Two Upsweep Style Arms *(26 56 13 00-0092)*

26 56 13 00-0106	EA	20' High, 6" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Two 4' Upsweep Style Arms, Anchor Base	3,013.88	454.90
		For >10 To 20, Deduct	*-75.35*	
		For >20 To 40, Deduct	*-150.69*	
		For >40, Deduct	*-248.79*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0107	EA	20' High, 6" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Two 6' Upsweep Style Arms, Anchor Base	3,233.31	454.90
		For >10 To 20, Deduct	*-80.83*	
		For >20 To 40, Deduct	*-161.67*	
		For >40, Deduct	*-265.24*	
26 56 13 00-0108	EA	20' High, 6" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Two 8' Upsweep Style Arms, Anchor Base	3,341.06	487.41
		For >10 To 20, Deduct	*-83.53*	
		For >20 To 40, Deduct	*-167.05*	
		For >40, Deduct	*-274.95*	
26 56 13 00-0109	EA	25' High, 7" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Two 4' Upsweep Style Arms, Anchor Base	3,599.81	584.88
		For >10 To 20, Deduct	*-90.00*	
		For >20 To 40, Deduct	*-179.99*	
		For >40, Deduct	*-299.23*	
26 56 13 00-0110	EA	25' High, 7" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Two 6' Upsweep Style Arms, Anchor Base	3,771.99	601.13
		For >10 To 20, Deduct	*-94.30*	
		For >20 To 40, Deduct	*-188.60*	
		For >40, Deduct	*-312.96*	
26 56 13 00-0111	EA	25' High, 7" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Two 8' Upsweep Style Arms, Anchor Base	4,019.69	617.38
		For >10 To 20, Deduct	*-100.49*	
		For >20 To 40, Deduct	*-200.98*	
		For >40, Deduct	*-332.35*	
26 56 13 00-0112	EA	30' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Two 4' Upsweep Style Arms, Anchor Base	4,152.87	649.87
		For >10 To 20, Deduct	*-103.82*	
		For >20 To 40, Deduct	*-207.64*	
		For >40, Deduct	*-343.96*	
26 56 13 00-0113	EA	30' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Two 6' Upsweep Style Arms, Anchor Base	4,314.95	666.11
		For >10 To 20, Deduct	*-107.87*	
		For >20 To 40, Deduct	*-215.75*	
		For >40, Deduct	*-356.93*	
26 56 13 00-0114	EA	30' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Two 8' Upsweep Style Arms, Anchor Base	4,512.45	682.36
		For >10 To 20, Deduct	*-112.81*	
		For >20 To 40, Deduct	*-225.62*	
		For >40, Deduct	*-372.55*	
26 56 13 00-0115	EA	35' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Two 4' Upsweep Style Arms, Anchor Base	4,706.56	682.36
		For >10 To 20, Deduct	*-117.66*	
		For >20 To 40, Deduct	*-235.33*	
		For >40, Deduct	*-387.11*	
26 56 13 00-0116	EA	35' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Two 6' Upsweep Style Arms, Anchor Base	5,143.05	698.61
		For >10 To 20, Deduct	*-128.58*	
		For >20 To 40, Deduct	*-257.15*	
		For >40, Deduct	*-420.66*	
26 56 13 00-0117	EA	35' High, 8" Base OD, 0.250" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Two 8' Upsweep Style Arms, Anchor Base	5,650.49	714.85
		For >10 To 20, Deduct	*-141.26*	
		For >20 To 40, Deduct	*-282.52*	
		For >40, Deduct	*-459.53*	

26 56 13 00-0118 Round Tapered, Aluminum Roadway Light Poles With Three Upsweep Style Arms *(26 56 13 00-0092)*

26 56 13 00-0119	EA	20' High, 6" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Three 4' Upsweep Style Arms, Anchor Base	3,497.09	519.90
		For >10 To 20, Deduct	*-87.43*	
		For >20 To 40, Deduct	*-174.85*	
		For >40, Deduct	*-288.28*	
26 56 13 00-0120	EA	20' High, 6" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Three 6' Upsweep Style Arms, Anchor Base	3,739.57	552.39
		For >10 To 20, Deduct	*-93.49*	
		For >20 To 40, Deduct	*-186.98*	
		For >40, Deduct	*-308.09*	
26 56 13 00-0121	EA	25' High, 7" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Three 4' Upsweep Style Arms, Anchor Base	4,253.92	649.87
		For >10 To 20, Deduct	*-106.35*	
		For >20 To 40, Deduct	*-212.70*	
		For >40, Deduct	*-351.54*	
26 56 13 00-0122	EA	25' High, 7" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Three 6' Upsweep Style Arms, Anchor Base	4,436.28	682.36
		For >10 To 20, Deduct	*-110.91*	
		For >20 To 40, Deduct	*-221.81*	
		For >40, Deduct	*-366.84*	
26 56 13 00-0123	EA	30' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Three 4' Upsweep Style Arms, Anchor Base	4,646.00	714.85
		For >10 To 20, Deduct	*-116.15*	
		For >20 To 40, Deduct	*-232.30*	
		For >40, Deduct	*-384.19*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0124	EA	30' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Three 6' Upsweep Style Arms, Anchor Base	4,812.04	747.35
		For >10 To 20, Deduct	*-120.30*	
		For >20 To 40, Deduct	*-240.60*	
		For >40, Deduct	*-398.27*	
26 56 13 00-0125	EA	35' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Three 4' Upsweep Style Arms, Anchor Base	5,022.20	747.35
		For >10 To 20, Deduct	*-125.56*	
		For >20 To 40, Deduct	*-251.11*	
		For >40, Deduct	*-414.03*	
26 56 13 00-0126	EA	35' High, 8" Base OD, 0.219" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Three 6' Upsweep Style Arms, Anchor Base	5,460.17	779.84
		For >10 To 20, Deduct	*-136.50*	
		For >20 To 40, Deduct	*-273.01*	
		For >40, Deduct	*-448.51*	
26 56 13 00-0127	EA	35' High, 8" Base OD, 0.250" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Three 8' Upsweep Style Arms, Anchor Base	11,873.90	812.34
		For >10 To 20, Deduct	*-296.85*	
		For >20 To 40, Deduct	*-593.70*	
		For >40, Deduct	*-931.16*	

26 56 13 00-0128 Round Tapered, Aluminum Roadway Light Poles With Four Upsweep Style Arms *(26 56 13 00-0092)*

26 56 13 00-0129	EA	20' High, 6" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Four 4' Upsweep Style Arms, Anchor Base	3,626.52	584.88
		For >10 To 20, Deduct	*-90.66*	
		For >20 To 40, Deduct	*-181.33*	
		For >40, Deduct	*-301.23*	
26 56 13 00-0130	EA	20' High, 6" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Four 6' Upsweep Style Arms, Anchor Base	3,760.88	584.88
		For >10 To 20, Deduct	*-94.02*	
		For >20 To 40, Deduct	*-188.04*	
		For >40, Deduct	*-311.31*	
26 56 13 00-0131	EA	25' High, 7" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Four 4' Upsweep Style Arms, Anchor Base	4,654.35	714.85
		For >10 To 20, Deduct	*-116.36*	
		For >20 To 40, Deduct	*-232.72*	
		For >40, Deduct	*-384.82*	
26 56 13 00-0132	EA	25' High, 7" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Four 6' Upsweep Style Arms, Anchor Base	5,038.26	763.59
		For >10 To 20, Deduct	*-125.96*	
		For >20 To 40, Deduct	*-251.91*	
		For >40, Deduct	*-416.05*	
26 56 13 00-0133	EA	30' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Four 4' Upsweep Style Arms, Anchor Base	5,253.77	779.84
		For >10 To 20, Deduct	*-131.34*	
		For >20 To 40, Deduct	*-262.69*	
		For >40, Deduct	*-433.03*	
26 56 13 00-0134	EA	30' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Four 6' Upsweep Style Arms, Anchor Base	5,607.93	828.59
		For >10 To 20, Deduct	*-140.20*	
		For >20 To 40, Deduct	*-280.40*	
		For >40, Deduct	*-462.02*	
26 56 13 00-0135	EA	35' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Four 4' Upsweep Style Arms, Anchor Base	5,531.76	812.34
		For >10 To 20, Deduct	*-138.29*	
		For >20 To 40, Deduct	*-276.59*	
		For >40, Deduct	*-455.50*	
26 56 13 00-0136	EA	35' High, 8" Base OD, 0.219" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Four 6' Upsweep Style Arms, Anchor Base	6,287.00	861.08
		For >10 To 20, Deduct	*-157.18*	
		For >20 To 40, Deduct	*-314.35*	
		For >40, Deduct	*-514.58*	
26 56 13 00-0137	EA	35' High, 8" Base OD, 0.250" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Four 8' Upsweep Style Arms, Anchor Base	6,955.15	909.82
		For >10 To 20, Deduct	*-173.88*	
		For >20 To 40, Deduct	*-347.76*	
		For >40, Deduct	*-567.13*	

26 56 13 00-0138 Round Tapered, Aluminum Roadway Light Poles With Truss Style Arms *(26 56 13 00-0091)*

26 56 13 00-0139 Round Tapered, Aluminum Roadway Light Poles With Single Truss Style Arm *(26 56 13 00-0138)*

26 56 13 00-0140	EA	25' High, 7" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 8' Truss Style Arm, Anchor Base	3,849.33	519.90
		For >10 To 20, Deduct	*-96.23*	
		For >20 To 40, Deduct	*-192.47*	
		For >40, Deduct	*-314.69*	
26 56 13 00-0141	EA	25' High, 7" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 10' Truss Style Arm, Anchor Base	3,879.25	519.90
		For >10 To 20, Deduct	*-96.98*	
		For >20 To 40, Deduct	*-193.96*	
		For >40, Deduct	*-316.94*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0142	EA	25' High, 7" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 12' Truss Style Arm, Anchor Base	3,955.70	519.90
		For >10 To 20, Deduct	*-98.89*	
		For >20 To 40, Deduct	*-197.79*	
		For >40, Deduct	*-322.67*	
26 56 13 00-0143	EA	25' High, 7" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 15' Truss Style Arm, Anchor Base	4,070.42	519.90
		For >10 To 20, Deduct	*-101.76*	
		For >20 To 40, Deduct	*-203.52*	
		For >40, Deduct	*-331.28*	
26 56 13 00-0144	EA	30' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 8' Truss Style Arm, Anchor Base	4,334.02	584.88
		For >10 To 20, Deduct	*-108.35*	
		For >20 To 40, Deduct	*-216.70*	
		For >40, Deduct	*-354.30*	
26 56 13 00-0145	EA	30' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 10' Truss Style Arm, Anchor Base	4,401.48	584.88
		For >10 To 20, Deduct	*-110.04*	
		For >20 To 40, Deduct	*-220.07*	
		For >40, Deduct	*-359.36*	
26 56 13 00-0146	EA	30' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 12' Truss Style Arm, Anchor Base	4,473.43	584.88
		For >10 To 20, Deduct	*-111.84*	
		For >20 To 40, Deduct	*-223.67*	
		For >40, Deduct	*-364.75*	
26 56 13 00-0147	EA	30' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 15' Truss Style Arm, Anchor Base	4,907.44	584.88
		For >10 To 20, Deduct	*-122.69*	
		For >20 To 40, Deduct	*-245.37*	
		For >40, Deduct	*-397.30*	
26 56 13 00-0148	EA	35' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 8' Truss Style Arm, Anchor Base	4,707.65	617.38
		For >10 To 20, Deduct	*-117.69*	
		For >20 To 40, Deduct	*-235.38*	
		For >40, Deduct	*-383.94*	
26 56 13 00-0149	EA	35' High, 8" Base OD, 0.219" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 10' Truss Style Arm, Anchor Base	5,264.54	617.38
		For >10 To 20, Deduct	*-131.61*	
		For >20 To 40, Deduct	*-263.23*	
		For >40, Deduct	*-425.71*	
26 56 13 00-0150	EA	35' High, 8" Base OD, 0.219" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 12' Truss Style Arm, Anchor Base	5,318.78	617.38
		For >10 To 20, Deduct	*-132.97*	
		For >20 To 40, Deduct	*-265.94*	
		For >40, Deduct	*-429.78*	
26 56 13 00-0151	EA	35' High, 8" Base OD, 0.219" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 15' Truss Style Arm, Anchor Base	5,663.13	617.38
		For >10 To 20, Deduct	*-141.58*	
		For >20 To 40, Deduct	*-283.16*	
		For >40, Deduct	*-455.60*	
26 56 13 00-0152	EA	35' High, 8" Base OD, 0.250" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 15' Truss Style Arm, Anchor Base	5,977.18	617.38
		For >10 To 20, Deduct	*-149.43*	
		For >20 To 40, Deduct	*-298.86*	
		For >40, Deduct	*-479.16*	

26 56 13 00-0153 Round Tapered, Aluminum Roadway Light Poles With Two Truss Style Arms *(26 56 13 00-0138)*

26 56 13 00-0154	EA	25' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Two 10' Truss Style Arms, Anchor Base	4,993.82	649.87
		For >10 To 20, Deduct	*-124.85*	
		For >20 To 40, Deduct	*-249.69*	
		For >40, Deduct	*-407.03*	
26 56 13 00-0155	EA	25' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Two 12' Truss Style Arms, Anchor Base	5,135.25	682.36
		For >10 To 20, Deduct	*-128.38*	
		For >20 To 40, Deduct	*-256.76*	
		For >40, Deduct	*-419.26*	
26 56 13 00-0156	EA	25' High, 8" Base OD, 0.219" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Two 15' Truss Style Arms, Anchor Base	5,249.43	714.85
		For >10 To 20, Deduct	*-131.24*	
		For >20 To 40, Deduct	*-262.47*	
		For >40, Deduct	*-429.45*	
26 56 13 00-0157	EA	30' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Two 10' Truss Style Arms, Anchor Base	5,380.48	714.85
		For >10 To 20, Deduct	*-134.51*	
		For >20 To 40, Deduct	*-269.02*	
		For >40, Deduct	*-439.28*	
26 56 13 00-0158	EA	30' High, 8" Base OD, 0.219" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Two 12' Truss Style Arms, Anchor Base	5,843.96	747.35
		For >10 To 20, Deduct	*-146.10*	
		For >20 To 40, Deduct	*-292.20*	
		For >40, Deduct	*-475.66*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0159	EA	30' High, 8" Base OD, 0.250" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Two 15' Truss Style Arms, Anchor Base	6,695.20	779.84
		For >10 To 20, Deduct	*-167.38*	
		For >20 To 40, Deduct	*-334.76*	
		For >40, Deduct	*-541.13*	
26 56 13 00-0160	EA	35' High, 8" Base OD, 0.250" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Two 10' Truss Style Arms, Anchor Base	6,474.56	747.35
		For >10 To 20, Deduct	*-161.86*	
		For >20 To 40, Deduct	*-323.73*	
		For >40, Deduct	*-522.96*	
26 56 13 00-0161	EA	35' High, 10" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Two 12' Truss Style Arms, Anchor Base	6,603.61	779.84
		For >10 To 20, Deduct	*-165.09*	
		For >20 To 40, Deduct	*-330.18*	
		For >40, Deduct	*-534.26*	
26 56 13 00-0162	EA	35' High, 10" Base OD, 0.250" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Two 15' Truss Style Arms, Anchor Base	8,013.11	812.34
		For >10 To 20, Deduct	*-200.33*	
		For >20 To 40, Deduct	*-400.66*	
		For >40, Deduct	*-641.60*	

26 56 13 00-0163 Round Tapered, Aluminum Roadway Light Poles With Davit Style Arm *(26 56 13 00-0091)*

26 56 13 00-0164 Round Tapered, Aluminum Roadway Light Poles With Single Davit Style Arm *(26 56 13 00-0163)*

26 56 13 00-0165	EA	20' High, 6" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 4' Davit Style Arm, Anchor Base	3,152.62	389.92
		For >10 To 20, Deduct	*-78.82*	
		For >20 To 40, Deduct	*-157.63*	
		For >40, Deduct	*-255.94*	
26 56 13 00-0166	EA	20' High, 6" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 6' Davit Style Arm, Anchor Base	3,237.14	389.92
		For >10 To 20, Deduct	*-80.93*	
		For >20 To 40, Deduct	*-161.86*	
		For >40, Deduct	*-262.28*	
26 56 13 00-0167	EA	20' High, 6" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 8' Davit Style Arm, Anchor Base	3,321.85	389.92
		For >10 To 20, Deduct	*-83.05*	
		For >20 To 40, Deduct	*-166.09*	
		For >40, Deduct	*-268.63*	
26 56 13 00-0168	EA	25' High, 7" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 4' Davit Style Arm, Anchor Base	3,758.20	519.90
		For >10 To 20, Deduct	*-93.96*	
		For >20 To 40, Deduct	*-187.91*	
		For >40, Deduct	*-307.86*	
26 56 13 00-0169	EA	25' High, 7" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 6' Davit Style Arm, Anchor Base	3,822.62	519.90
		For >10 To 20, Deduct	*-95.57*	
		For >20 To 40, Deduct	*-191.13*	
		For >40, Deduct	*-312.69*	
26 56 13 00-0170	EA	25' High, 7" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 8' Davit Style Arm, Anchor Base	3,893.01	519.90
		For >10 To 20, Deduct	*-97.33*	
		For >20 To 40, Deduct	*-194.65*	
		For >40, Deduct	*-317.97*	
26 56 13 00-0171	EA	30' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 4' Davit Style Arm, Anchor Base	4,241.33	584.88
		For >10 To 20, Deduct	*-106.03*	
		For >20 To 40, Deduct	*-212.07*	
		For >40, Deduct	*-347.34*	
26 56 13 00-0172	EA	30' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 6' Davit Style Arm, Anchor Base	4,328.79	584.88
		For >10 To 20, Deduct	*-108.22*	
		For >20 To 40, Deduct	*-216.44*	
		For >40, Deduct	*-353.90*	
26 56 13 00-0173	EA	30' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 8' Davit Style Arm, Anchor Base	4,341.92	584.88
		For >10 To 20, Deduct	*-108.55*	
		For >20 To 40, Deduct	*-217.10*	
		For >40, Deduct	*-354.89*	
26 56 13 00-0174	EA	35' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 4' Davit Style Arm, Anchor Base	4,617.52	617.38
		For >10 To 20, Deduct	*-115.44*	
		For >20 To 40, Deduct	*-230.88*	
		For >40, Deduct	*-377.18*	
26 56 13 00-0175	EA	35' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 6' Davit Style Arm, Anchor Base	4,655.88	617.38
		For >10 To 20, Deduct	*-116.40*	
		For >20 To 40, Deduct	*-232.79*	
		For >40, Deduct	*-380.06*	
26 56 13 00-0176	EA	35' High, 8" Base OD, 0.188" Wall Thickness, Round Tapered, Aluminum Roadway Light Pole With Single 8' Davit Style Arm, Anchor Base	4,745.82	617.38
		For >10 To 20, Deduct	*-118.65*	
		For >20 To 40, Deduct	*-237.29*	
		For >40, Deduct	*-386.81*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0177		Area Light Poles *(26 56 13 00-0001)* Note: Excludes lighting fixtures.			
26 56 13 00-0178		Steel Area Light Poles *(26 56 13 00-0177)* Note: Includes powdercoat finish, anchor bolts, base cover, reinforced handhole with cover and grounding provisions, factory drilled fixture mounting holes and tenon, open or capped top.			
26 56 13 00-0179		Round Straight, Steel Area Light Poles *(26 56 13 00-0178)*			
26 56 13 00-0180		Round Straight, Steel Area Light Poles, Anchor Base *(26 56 13 00-0179)*			
26 56 13 00-0181	EA	10' High, 3" OD, 11 Gauge, Round Straight, Steel Area Light Pole, Anchor Base		1,326.73	227.46
		For Galvanized Finish, Add		*26.15*	
		For >10 To 20, Deduct		*-46.25*	
		For >20 To 40, Deduct		*-83.77*	
		For >40, Deduct		*-176.26*	
26 56 13 00-0182	EA	12' High, 3" OD, 11 Gauge, Round Straight, Steel Area Light Pole, Anchor Base		1,440.03	259.95
		For Galvanized Finish, Add		*27.60*	
		For >10 To 20, Deduct		*-49.80*	
		For >20 To 40, Deduct		*-90.40*	
		For >40, Deduct		*-190.01*	
26 56 13 00-0183	EA	14' High, 3" OD, 11 Gauge, Round Straight, Steel Area Light Pole, Anchor Base		1,608.86	292.44
		For Galvanized Finish, Add		*30.72*	
		For >10 To 20, Deduct		*-55.58*	
		For >20 To 40, Deduct		*-100.92*	
		For >40, Deduct		*-212.09*	
26 56 13 00-0184	EA	16' High, 3" OD, 11 Gauge, Round Straight, Steel Area Light Pole, Anchor Base		1,782.53	324.93
		For Galvanized Finish, Add		*33.98*	
		For >10 To 20, Deduct		*-61.55*	
		For >20 To 40, Deduct		*-111.78*	
		For >40, Deduct		*-234.89*	
26 56 13 00-0185	EA	18' High, 3" OD, 11 Gauge, Round Straight, Steel Area Light Pole, Anchor Base		1,895.81	357.43
		For Galvanized Finish, Add		*35.43*	
		For >10 To 20, Deduct		*-65.11*	
		For >20 To 40, Deduct		*-118.41*	
		For >40, Deduct		*-248.63*	
26 56 13 00-0186	EA	20' High, 3" OD, 11 Gauge, Round Straight, Steel Area Light Pole, Anchor Base		1,997.03	389.92
		For Galvanized Finish, Add		*36.52*	
		For >10 To 20, Deduct		*-68.18*	
		For >20 To 40, Deduct		*-124.20*	
		For >40, Deduct		*-260.56*	
26 56 13 00-0187	EA	10' High, 4" OD, 11 Gauge, Round Straight, Steel Area Light Pole, Anchor Base		1,389.52	227.46
		For Galvanized Finish, Add		*28.04*	
		For >10 To 20, Deduct		*-48.76*	
		For >20 To 40, Deduct		*-88.17*	
		For >40, Deduct		*-185.68*	
26 56 13 00-0188	EA	12' High, 4" OD, 11 Gauge, Round Straight, Steel Area Light Pole, Anchor Base		1,505.24	259.95
		For Galvanized Finish, Add		*29.56*	
		For >10 To 20, Deduct		*-52.41*	
		For >20 To 40, Deduct		*-94.97*	
		For >40, Deduct		*-199.79*	
26 56 13 00-0189	EA	14' High, 4" OD, 11 Gauge, Round Straight, Steel Area Light Pole, Anchor Base		1,739.27	292.44
		For Galvanized Finish, Add		*34.63*	
		For >10 To 20, Deduct		*-60.80*	
		For >20 To 40, Deduct		*-110.05*	
		For >40, Deduct		*-231.65*	
26 56 13 00-0190	EA	16' High, 4" OD, 11 Gauge, Round Straight, Steel Area Light Pole, Anchor Base		1,867.06	324.93
		For Galvanized Finish, Add		*36.52*	
		For >10 To 20, Deduct		*-64.93*	
		For >20 To 40, Deduct		*-117.70*	
		For >40, Deduct		*-247.57*	
26 56 13 00-0191	EA	18' High, 4" OD, 11 Gauge, Round Straight, Steel Area Light Pole, Anchor Base		1,987.58	357.43
		For Galvanized Finish, Add		*38.18*	
		For >10 To 20, Deduct		*-68.78*	
		For >20 To 40, Deduct		*-124.83*	
		For >40, Deduct		*-262.39*	
26 56 13 00-0192	EA	20' High, 4" OD, 11 Gauge, Round Straight, Steel Area Light Pole, Anchor Base		2,083.97	389.92
		For Galvanized Finish, Add		*39.12*	
		For >10 To 20, Deduct		*-71.66*	
		For >20 To 40, Deduct		*-130.28*	
		For >40, Deduct		*-273.60*	
26 56 13 00-0193	EA	25' High, 4" OD, 11 Gauge, Round Straight, Steel Area Light Pole, Anchor Base		2,433.27	519.90
		For Galvanized Finish, Add		*41.80*	
		For >10 To 20, Deduct		*-81.73*	
		For >20 To 40, Deduct		*-149.53*	
		For >40, Deduct		*-313.00*	
26 56 13 00-0194	EA	10' High, 4-1/2" OD, 11 Gauge, Round Straight, Steel Area Light Pole, Anchor Base		1,389.52	227.46
		For Galvanized Finish, Add		*28.04*	
		For >10 To 20, Deduct		*-48.76*	
		For >20 To 40, Deduct		*-88.17*	
		For >40, Deduct		*-185.68*	
26 56 13 00-0195	EA	12' High, 4-1/2" OD, 11 Gauge, Round Straight, Steel Area Light Pole, Anchor Base		1,512.49	259.95
		For Galvanized Finish, Add		*29.78*	
		For >10 To 20, Deduct		*-52.70*	
		For >20 To 40, Deduct		*-95.48*	
		For >40, Deduct		*-200.88*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0196	EA	14' High, 4-1/2" OD, 11 Gauge, Round Straight, Steel Area Light Pole, Anchor Base	1,777.91	292.44
		For Galvanized Finish, Add	*35.79*	
		For >10 To 20, Deduct	*-62.34*	
		For >20 To 40, Deduct	*-112.76*	
		For >40, Deduct	*-237.44*	
26 56 13 00-0197	EA	16' High, 4-1/2" OD, 11 Gauge, Round Straight, Steel Area Light Pole, Anchor Base	1,874.30	324.93
		For Galvanized Finish, Add	*36.73*	
		For >10 To 20, Deduct	*-65.22*	
		For >20 To 40, Deduct	*-118.20*	
		For >40, Deduct	*-248.65*	
26 56 13 00-0198	EA	18' High, 4-1/2" OD, 11 Gauge, Round Straight, Steel Area Light Pole, Anchor Base	1,987.58	357.43
		For Galvanized Finish, Add	*38.18*	
		For >10 To 20, Deduct	*-68.78*	
		For >20 To 40, Deduct	*-124.83*	
		For >40, Deduct	*-262.39*	
26 56 13 00-0199	EA	20' High, 4-1/2" OD, 11 Gauge, Round Straight, Steel Area Light Pole, Anchor Base	2,083.97	389.92
		For Galvanized Finish, Add	*39.12*	
		For >10 To 20, Deduct	*-71.66*	
		For >20 To 40, Deduct	*-130.28*	
		For >40, Deduct	*-273.60*	
26 56 13 00-0200	EA	25' High, 4-1/2" OD, 11 Gauge, Round Straight, Steel Area Light Pole, Anchor Base	2,500.90	519.90
		For Galvanized Finish, Add	*43.83*	
		For >10 To 20, Deduct	*-84.44*	
		For >20 To 40, Deduct	*-154.27*	
		For >40, Deduct	*-323.15*	
26 56 13 00-0201	EA	30' High, 4-1/2" OD, 11 Gauge, Round Straight, Steel Area Light Pole, Anchor Base	2,756.46	584.88
		For Galvanized Finish, Add	*47.60*	
		For >10 To 20, Deduct	*-92.71*	
		For >20 To 40, Deduct	*-169.56*	
		For >40, Deduct	*-354.98*	
26 56 13 00-0202	EA	20' High, 5" OD, 11 Gauge, Round Straight, Steel Area Light Pole, Anchor Base	2,238.53	389.92
		For Galvanized Finish, Add	*43.76*	
		For >10 To 20, Deduct	*-77.84*	
		For >20 To 40, Deduct	*-141.10*	
		For >40, Deduct	*-296.79*	
26 56 13 00-0203	EA	25' High, 5" OD, 11 Gauge, Round Straight, Steel Area Light Pole, Anchor Base	2,532.29	519.90
		For Galvanized Finish, Add	*44.78*	
		For >10 To 20, Deduct	*-85.69*	
		For >20 To 40, Deduct	*-156.46*	
		For >40, Deduct	*-327.85*	
26 56 13 00-0204	EA	30' High, 5" OD, 11 Gauge, Round Straight, Steel Area Light Pole, Anchor Base	2,816.83	584.88
		For Galvanized Finish, Add	*49.41*	
		For >10 To 20, Deduct	*-95.13*	
		For >20 To 40, Deduct	*-173.78*	
		For >40, Deduct	*-364.04*	

26 56 13 00-0205 Round Tapered, Steel Area Light Poles *(26 56 13 00-0178)*

26 56 13 00-0206 Round Tapered, Steel Area Light Poles, Anchor Base *(26 56 13 00-0205)*

26 56 13 00-0207	EA	20' High, 5.90" Base OD, 11 Gauge, Round Tapered, Steel Area Light Pole, Anchor Base	2,784.33	389.92
		For Galvanized Finish, Add	*60.13*	
		For >10 To 20, Deduct	*-99.68*	
		For >20 To 40, Deduct	*-179.31*	
		For >40, Deduct	*-378.66*	
26 56 13 00-0208	EA	20' High, 6.50" Base OD, 11 Gauge, Round Tapered, Steel Area Light Pole, Anchor Base	2,859.20	389.92
		For Galvanized Finish, Add	*62.38*	
		For >10 To 20, Deduct	*-102.67*	
		For >20 To 40, Deduct	*-184.55*	
		For >40, Deduct	*-389.89*	
26 56 13 00-0209	EA	25' High, 5.90" Base OD, 11 Gauge, Round Tapered, Steel Area Light Pole, Anchor Base	3,283.37	519.90
		For Galvanized Finish, Add	*67.31*	
		For >10 To 20, Deduct	*-115.74*	
		For >20 To 40, Deduct	*-209.04*	
		For >40, Deduct	*-440.52*	
26 56 13 00-0210	EA	25' High, 7.00" Base OD, 11 Gauge, Round Tapered, Steel Area Light Pole, Anchor Base	3,437.93	519.90
		For Galvanized Finish, Add	*71.94*	
		For >10 To 20, Deduct	*-121.92*	
		For >20 To 40, Deduct	*-219.86*	
		For >40, Deduct	*-463.70*	
26 56 13 00-0211	EA	30' High, 6.60" Base OD, 11 Gauge, Round Tapered, Steel Area Light Pole, Anchor Base	3,654.86	584.88
		For Galvanized Finish, Add	*74.55*	
		For >10 To 20, Deduct	*-128.65*	
		For >20 To 40, Deduct	*-232.44*	
		For >40, Deduct	*-489.74*	
26 56 13 00-0212	EA	30' High, 8.00" Base OD, 11 Gauge, Round Tapered, Steel Area Light Pole, Anchor Base	3,913.27	584.88
		For Galvanized Finish, Add	*82.31*	
		For >10 To 20, Deduct	*-138.98*	
		For >20 To 40, Deduct	*-250.53*	
		For >40, Deduct	*-528.50*	
26 56 13 00-0213	EA	35' High, 7.30" Base OD, 11 Gauge, Round Tapered, Steel Area Light Pole, Anchor Base	4,031.38	617.38
		For Galvanized Finish, Add	*83.90*	
		For >10 To 20, Deduct	*-142.73*	
		For >20 To 40, Deduct	*-257.50*	
		For >40, Deduct	*-542.97*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0214	EA	35' High, 8.50" Base OD, 11 Gauge, Round Tapered, Steel Area Light Pole, Anchor Base	4,190.77	617.38
		For Galvanized Finish, Add	*88.68*	
		For >10 To 20, Deduct	*-149.11*	
		For >20 To 40, Deduct	*-268.66*	
		For >40, Deduct	*-566.88*	
26 56 13 00-0215	EA	35' High, 9.50" Base OD, 11 Gauge, Round Tapered, Steel Area Light Pole, Anchor Base	4,572.35	617.38
		For Galvanized Finish, Add	*100.13*	
		For >10 To 20, Deduct	*-164.37*	
		For >20 To 40, Deduct	*-295.37*	
		For >40, Deduct	*-624.12*	
26 56 13 00-0216	EA	39' High, 7.82" Base OD, 11 Gauge, Round Tapered, Steel Area Light Pole, Anchor Base	4,608.36	649.87
		For Galvanized Finish, Add	*99.26*	
		For >10 To 20, Deduct	*-164.84*	
		For >20 To 40, Deduct	*-296.59*	
		For >40, Deduct	*-626.27*	
26 56 13 00-0217	EA	39' High, 9.00" Base OD, 11 Gauge, Round Tapered, Steel Area Light Pole, Anchor Base	4,675.98	649.87
		For Galvanized Finish, Add	*101.29*	
		For >10 To 20, Deduct	*-167.54*	
		For >20 To 40, Deduct	*-301.32*	
		For >40, Deduct	*-636.41*	
26 56 13 00-0218	EA	45' High, 10.00" Base OD, 11 Gauge, Round Tapered, Steel Area Light Pole, Anchor Base	6,367.61	844.83
		For Galvanized Finish, Add	*140.34*	
		For >10 To 20, Deduct	*-229.36*	
		For >20 To 40, Deduct	*-411.94*	
		For >40, Deduct	*-870.66*	
26 56 13 00-0219	EA	50' High, 10.00" Base OD, 11 Gauge, Round Tapered, Steel Area Light Pole, Anchor Base	6,613.06	974.80
		For Galvanized Finish, Add	*139.90*	
		For >10 To 20, Deduct	*-235.28*	
		For >20 To 40, Deduct	*-423.92*	
		For >40, Deduct	*-894.48*	
26 56 13 00-0220	EA	25' High, 7.00" Base OD, 7 Gauge, Round Tapered, Steel Area Light Pole, Anchor Base	4,486.07	519.90
		For Galvanized Finish, Add	*103.39*	
		For >10 To 20, Deduct	*-163.85*	
		For >20 To 40, Deduct	*-293.23*	
		For >40, Deduct	*-620.92*	
26 56 13 00-0221	EA	30' High, 8.00" Base OD, 7 Gauge, Round Tapered, Steel Area Light Pole, Anchor Base	5,094.23	584.88
		For Galvanized Finish, Add	*117.73*	
		For >10 To 20, Deduct	*-186.22*	
		For >20 To 40, Deduct	*-333.20*	
		For >40, Deduct	*-705.65*	
26 56 13 00-0222	EA	39' High, 9.00" Base OD, 7 Gauge, Round Tapered, Steel Area Light Pole, Anchor Base	5,910.07	649.87
		For Galvanized Finish, Add	*138.31*	
		For >10 To 20, Deduct	*-216.91*	
		For >20 To 40, Deduct	*-387.71*	
		For >40, Deduct	*-821.52*	
26 56 13 00-0223	EA	45' High, 10.00" Base OD, 7 Gauge, Round Tapered, Steel Area Light Pole, Anchor Base	7,121.11	844.83
		For Galvanized Finish, Add	*162.94*	
		For >10 To 20, Deduct	*-259.50*	
		For >20 To 40, Deduct	*-464.68*	
		For >40, Deduct	*-983.68*	
26 56 13 00-0224	EA	50' High, 10.00" Base OD, 7 Gauge, Round Tapered, Steel Area Light Pole, Anchor Base	8,313.26	974.80
		For Galvanized Finish, Add	*190.91*	
		For >10 To 20, Deduct	*-303.29*	
		For >20 To 40, Deduct	*-542.94*	
		For >40, Deduct	*-1,149.51*	
26 56 13 00-0225	EA	50' High, 11.00" Base OD, 7 Gauge, Round Tapered, Steel Area Light Pole, Anchor Base	9,296.18	974.80
		For Galvanized Finish, Add	*220.40*	
		For >10 To 20, Deduct	*-342.60*	
		For >20 To 40, Deduct	*-611.74*	
		For >40, Deduct	*-1,296.95*	
26 56 13 00-0226	EA	50' High, 13.00" Base OD, 7 Gauge, Round Tapered, Steel Area Light Pole, Anchor Base	12,580.65	974.80
		For Galvanized Finish, Add	*318.93*	
		For >10 To 20, Deduct	*-473.98*	
		For >20 To 40, Deduct	*-841.65*	
		For >40, Deduct	*-1,789.62*	
26 56 13 00-0227	EA	50' High, 13.00" Base OD, 3 Gauge, Round Tapered, Steel Area Light Pole, Anchor Base	14,174.58	974.80
		For Galvanized Finish, Add	*366.75*	
		For >10 To 20, Deduct	*-537.74*	
		For >20 To 40, Deduct	*-953.23*	
		For >40, Deduct	*-2,028.71*	

26 56 13 00-0228 Square Straight, Steel Area Light Poles *(26 56 13 00-0178)*

26 56 13 00-0229 Square Straight, Steel Area Light Poles, Anchor Base *(26 56 13 00-0228)*

26 56 13 00-0230	EA	10' High, 4" OD, 11 Gauge, Square Straight, Steel Area Light Pole, Anchor Base	1,307.41	227.46
		For Galvanized Finish, Add	*25.58*	
		For >10 To 20, Deduct	*-45.47*	
		For >20 To 40, Deduct	*-82.42*	
		For >40, Deduct	*-173.37*	
26 56 13 00-0231	EA	12' High, 4" OD, 11 Gauge, Square Straight, Steel Area Light Pole, Anchor Base	1,372.41	259.95
		For Galvanized Finish, Add	*25.58*	
		For >10 To 20, Deduct	*-47.10*	
		For >20 To 40, Deduct	*-85.67*	
		For >40, Deduct	*-179.87*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0232	EA	14' High, 4" OD, 11 Gauge, Square Straight, Steel Area Light Pole, Anchor Base	1,478.45	292.44
		For Galvanized Finish, Add	*26.81*	
		For >10 To 20, Deduct	*-50.36*	
		For >20 To 40, Deduct	*-91.79*	
		For >40, Deduct	*-192.52*	
26 56 13 00-0233	EA	15' High, 4" OD, 11 Gauge, Square Straight, Steel Area Light Pole, Anchor Base	1,568.91	308.69
		For Galvanized Finish, Add	*28.55*	
		For >10 To 20, Deduct	*-53.50*	
		For >20 To 40, Deduct	*-97.48*	
		For >40, Deduct	*-204.47*	
26 56 13 00-0234	EA	16' High, 4" OD, 11 Gauge, Square Straight, Steel Area Light Pole, Anchor Base	1,601.40	324.93
		For Galvanized Finish, Add	*28.55*	
		For >10 To 20, Deduct	*-54.31*	
		For >20 To 40, Deduct	*-99.10*	
		For >40, Deduct	*-207.72*	
26 56 13 00-0235	EA	18' High, 4" OD, 11 Gauge, Square Straight, Steel Area Light Pole, Anchor Base	1,692.95	357.43
		For Galvanized Finish, Add	*29.34*	
		For >10 To 20, Deduct	*-57.00*	
		For >20 To 40, Deduct	*-104.21*	
		For >40, Deduct	*-218.20*	
26 56 13 00-0236	EA	20' High, 4" OD, 11 Gauge, Square Straight, Steel Area Light Pole, Anchor Base	1,779.67	389.92
		For Galvanized Finish, Add	*29.99*	
		For >10 To 20, Deduct	*-59.49*	
		For >20 To 40, Deduct	*-108.98*	
		For >40, Deduct	*-227.96*	
26 56 13 00-0237	EA	25' High, 4" OD, 11 Gauge, Square Straight, Steel Area Light Pole, Anchor Base	2,184.52	519.90
		For Galvanized Finish, Add	*34.34*	
		For >10 To 20, Deduct	*-71.78*	
		For >20 To 40, Deduct	*-132.12*	
		For >40, Deduct	*-275.69*	
26 56 13 00-0238	EA	20' High, 5" OD, 11 Gauge, Square Straight, Steel Area Light Pole, Anchor Base	2,105.70	389.92
		For Galvanized Finish, Add	*39.78*	
		For >10 To 20, Deduct	*-72.53*	
		For >20 To 40, Deduct	*-131.80*	
		For >40, Deduct	*-276.86*	
26 56 13 00-0239	EA	25' High, 5" OD, 11 Gauge, Square Straight, Steel Area Light Pole, Anchor Base	2,633.72	519.90
		For Galvanized Finish, Add	*47.82*	
		For >10 To 20, Deduct	*-89.75*	
		For >20 To 40, Deduct	*-163.56*	
		For >40, Deduct	*-343.07*	
26 56 13 00-0240	EA	30' High, 5" OD, 11 Gauge, Square Straight, Steel Area Light Pole, Anchor Base	3,026.94	584.88
		For Galvanized Finish, Add	*55.72*	
		For >10 To 20, Deduct	*-103.53*	
		For >20 To 40, Deduct	*-188.49*	
		For >40, Deduct	*-395.55*	
26 56 13 00-0241	EA	20' High, 4" OD, 7 Gauge, Square Straight, Steel Area Light Pole, Anchor Base	2,016.35	389.92
		For Galvanized Finish, Add	*37.10*	
		For >10 To 20, Deduct	*-68.96*	
		For >20 To 40, Deduct	*-125.55*	
		For >40, Deduct	*-263.46*	
26 56 13 00-0242	EA	25' High, 4" OD, 7 Gauge, Square Straight, Steel Area Light Pole, Anchor Base	2,459.84	519.90
		For Galvanized Finish, Add	*42.60*	
		For >10 To 20, Deduct	*-82.80*	
		For >20 To 40, Deduct	*-151.39*	
		For >40, Deduct	*-316.99*	
26 56 13 00-0243	EA	30' High, 4" OD, 7 Gauge, Square Straight, Steel Area Light Pole, Anchor Base	2,877.21	584.88
		For Galvanized Finish, Add	*51.22*	
		For >10 To 20, Deduct	*-97.54*	
		For >20 To 40, Deduct	*-178.01*	
		For >40, Deduct	*-373.09*	
26 56 13 00-0244	EA	20' High, 5" OD, 7 Gauge, Square Straight, Steel Area Light Pole, Anchor Base	2,323.06	389.92
		For Galvanized Finish, Add	*46.30*	
		For >10 To 20, Deduct	*-81.22*	
		For >20 To 40, Deduct	*-147.02*	
		For >40, Deduct	*-309.47*	
26 56 13 00-0245	EA	25' High, 5" OD, 7 Gauge, Square Straight, Steel Area Light Pole, Anchor Base	2,851.08	519.90
		For Galvanized Finish, Add	*54.34*	
		For >10 To 20, Deduct	*-98.45*	
		For >20 To 40, Deduct	*-178.78*	
		For >40, Deduct	*-375.67*	
26 56 13 00-0246	EA	30' High, 5" OD, 7 Gauge, Square Straight, Steel Area Light Pole, Anchor Base	3,232.22	584.88
		For Galvanized Finish, Add	*61.87*	
		For >10 To 20, Deduct	*-111.74*	
		For >20 To 40, Deduct	*-202.86*	
		For >40, Deduct	*-426.34*	
26 56 13 00-0247	EA	35' High, 5" OD, 7 Gauge, Square Straight, Steel Area Light Pole, Anchor Base	3,596.67	617.38
		For Galvanized Finish, Add	*70.86*	
		For >10 To 20, Deduct	*-125.35*	
		For >20 To 40, Deduct	*-227.07*	
		For >40, Deduct	*-477.76*	
26 56 13 00-0248	EA	30' High, 6" OD, 7 Gauge, Square Straight, Steel Area Light Pole, Anchor Base	3,707.99	584.88
		For Galvanized Finish, Add	*76.15*	
		For >10 To 20, Deduct	*-130.77*	
		For >20 To 40, Deduct	*-236.16*	
		For >40, Deduct	*-497.71*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0249	EA	35' High, 6" OD, 7 Gauge, Square Straight, Steel Area Light Pole, Anchor Base	4,074.85	617.38
		For Galvanized Finish, Add	*85.20*	
		For >10 To 20, Deduct	*-144.47*	
		For >20 To 40, Deduct	*-260.54*	
		For >40, Deduct	*-549.49*	
26 56 13 00-0250	EA	40' High, 6" OD, 7 Gauge, Square Straight, Steel Area Light Pole, Anchor Base	4,311.31	649.87
		For Galvanized Finish, Add	*90.35*	
		For >10 To 20, Deduct	*-152.96*	
		For >20 To 40, Deduct	*-275.80*	
		For >40, Deduct	*-581.71*	
26 56 13 00-0251		Hinged, Square Straight, Steel Area Light Poles *(26 56 13 00-0178)*		
26 56 13 00-0252		Hinged, Square Straight, Steel Area Light Poles, Anchor Base *(26 56 13 00-0251)*		
26 56 13 00-0253	EA	20' High, 6.44" OD, 11 Gauge, Hinged, Square Straight, Steel Area Light Pole, Anchor Base	4,784.50	389.92
		For Galvanized Finish, Add	*120.14*	
		For >10 To 20, Deduct	*-179.68*	
		For >20 To 40, Deduct	*-319.32*	
		For >40, Deduct	*-678.68*	
26 56 13 00-0254	EA	25' High, 6.44" OD, 11 Gauge, Hinged, Square Straight, Steel Area Light Pole, Anchor Base	5,316.73	519.90
		For Galvanized Finish, Add	*128.31*	
		For >10 To 20, Deduct	*-197.07*	
		For >20 To 40, Deduct	*-351.38*	
		For >40, Deduct	*-745.52*	
26 56 13 00-0255	EA	30' High, 6.44" OD, 11 Gauge, Hinged, Square Straight, Steel Area Light Pole, Anchor Base	7,481.15	584.88
		For Galvanized Finish, Add	*189.34*	
		For >10 To 20, Deduct	*-281.70*	
		For >20 To 40, Deduct	*-500.29*	
		For >40, Deduct	*-1,063.68*	
26 56 13 00-0256	EA	20' High, 7.32" OD, 11 Gauge, Hinged, Square Straight, Steel Area Light Pole, Anchor Base	4,882.11	389.92
		For Galvanized Finish, Add	*123.07*	
		For >10 To 20, Deduct	*-183.59*	
		For >20 To 40, Deduct	*-326.15*	
		For >40, Deduct	*-693.32*	
26 56 13 00-0257	EA	25' High, 7.32" OD, 11 Gauge, Hinged, Square Straight, Steel Area Light Pole, Anchor Base	5,884.42	519.90
		For Galvanized Finish, Add	*145.34*	
		For >10 To 20, Deduct	*-219.78*	
		For >20 To 40, Deduct	*-391.11*	
		For >40, Deduct	*-830.67*	
26 56 13 00-0258	EA	30' High, 7.32" OD, 11 Gauge, Hinged, Square Straight, Steel Area Light Pole, Anchor Base	8,326.27	584.88
		For Galvanized Finish, Add	*214.70*	
		For >10 To 20, Deduct	*-315.50*	
		For >20 To 40, Deduct	*-559.44*	
		For >40, Deduct	*-1,190.45*	
26 56 13 00-0259	EA	35' High, 7.32" OD, 11 Gauge, Hinged, Square Straight, Steel Area Light Pole, Anchor Base	9,570.30	617.38
		For Galvanized Finish, Add	*250.07*	
		For >10 To 20, Deduct	*-364.29*	
		For >20 To 40, Deduct	*-645.23*	
		For >40, Deduct	*-1,373.81*	
26 56 13 00-0260	EA	39' High, 7.32" OD, 11 Gauge, Hinged, Square Straight, Steel Area Light Pole, Anchor Base	11,271.57	649.87
		For Galvanized Finish, Add	*299.15*	
		For >10 To 20, Deduct	*-431.37*	
		For >20 To 40, Deduct	*-763.02*	
		For >40, Deduct	*-1,625.75*	
26 56 13 00-0261	EA	20' High, 4" OD, 7 Gauge, Hinged, Square Straight, Steel Area Light Pole, Anchor Base	4,630.37	389.92
		For Galvanized Finish, Add	*115.52*	
		For >10 To 20, Deduct	*-173.52*	
		For >20 To 40, Deduct	*-308.53*	
		For >40, Deduct	*-655.56*	
26 56 13 00-0262	EA	25' High, 4" OD, 7 Gauge, Hinged, Square Straight, Steel Area Light Pole, Anchor Base	5,070.14	519.90
		For Galvanized Finish, Add	*120.91*	
		For >10 To 20, Deduct	*-187.21*	
		For >20 To 40, Deduct	*-334.11*	
		For >40, Deduct	*-708.53*	
26 56 13 00-0263	EA	30' High, 4" OD, 7 Gauge, Hinged, Square Straight, Steel Area Light Pole, Anchor Base	7,047.04	584.88
		For Galvanized Finish, Add	*176.32*	
		For >10 To 20, Deduct	*-264.34*	
		For >20 To 40, Deduct	*-469.90*	
		For >40, Deduct	*-998.57*	
26 56 13 00-0264	EA	20' High, 6.44" OD, 7 Gauge, Hinged, Square Straight, Steel Area Light Pole, Anchor Base	4,807.62	389.92
		For Galvanized Finish, Add	*120.83*	
		For >10 To 20, Deduct	*-180.61*	
		For >20 To 40, Deduct	*-320.94*	
		For >40, Deduct	*-682.15*	
26 56 13 00-0265	EA	25' High, 6.44" OD, 7 Gauge, Hinged, Square Straight, Steel Area Light Pole, Anchor Base	5,653.24	519.90
		For Galvanized Finish, Add	*138.40*	
		For >10 To 20, Deduct	*-210.53*	
		For >20 To 40, Deduct	*-374.93*	
		For >40, Deduct	*-796.00*	
26 56 13 00-0266	EA	30' High, 6.44" OD, 7 Gauge, Hinged Square Straight, Steel Area Light Pole, Anchor Base	8,005.17	584.88
		For Galvanized Finish, Add	*205.06*	
		For >10 To 20, Deduct	*-302.66*	
		For >20 To 40, Deduct	*-536.97*	
		For >40, Deduct	*-1,142.29*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0267	EA	20' High, 7.32" OD, 7 Gauge, Hinged, Square Straight, Steel Area Light Pole, Anchor Base	5,079.90	389.92
		For Galvanized Finish, Add	*129.00*	
		For >10 To 20, Deduct	*-191.50*	
		For >20 To 40, Deduct	*-340.00*	
		For >40, Deduct	*-722.99*	
26 56 13 00-0268	EA	25' High, 7.32" OD, 7 Gauge, Hinged, Square Straight, Steel Area Light Pole, Anchor Base	6,143.87	519.90
		For Galvanized Finish, Add	*153.12*	
		For >10 To 20, Deduct	*-230.16*	
		For >20 To 40, Deduct	*-409.28*	
		For >40, Deduct	*-869.59*	
26 56 13 00-0269	EA	30' High, 7.32" OD, 7 Gauge, Hinged, Square Straight, Steel Area Light Pole, Anchor Base	8,583.14	584.88
		For Galvanized Finish, Add	*222.40*	
		For >10 To 20, Deduct	*-325.78*	
		For >20 To 40, Deduct	*-577.42*	
		For >40, Deduct	*-1,228.98*	
26 56 13 00-0270	EA	35' High, 7.32" OD, 7 Gauge, Hinged, Square Straight, Steel Area Light Pole, Anchor Base	9,883.68	617.38
		For Galvanized Finish, Add	*259.47*	
		For >10 To 20, Deduct	*-376.83*	
		For >20 To 40, Deduct	*-667.16*	
		For >40, Deduct	*-1,420.81*	
26 56 13 00-0271	EA	39' High, 7.32" OD, 7 Gauge, Hinged, Square Straight, Steel Area Light Pole, Anchor Base	11,438.54	649.87
		For Galvanized Finish, Add	*304.16*	
		For >10 To 20, Deduct	*-438.05*	
		For >20 To 40, Deduct	*-774.70*	
		For >40, Deduct	*-1,650.79*	

26 56 13 00-0272 Square Tapered, Steel Area Light Poles *(26 56 13 00-0178)*

26 56 13 00-0273 Square Tapered, Steel Area Light Poles, Anchor Base *(26 56 13 00-0272)*

26 56 13 00-0274	EA	20' High, 5.25" Base OD, 11 Gauge, Square Tapered, Steel Area Light Pole, Anchor Base	3,598.20	389.92
		For Galvanized Finish, Add	*84.55*	
		For >10 To 20, Deduct	*-132.23*	
		For >20 To 40, Deduct	*-236.28*	
		For >40, Deduct	*-500.74*	
26 56 13 00-0275	EA	25' High, 6.00" Base OD, 11 Gauge, Square Tapered, Steel Area Light Pole, Anchor Base	4,355.65	519.90
		For Galvanized Finish, Add	*99.48*	
		For >10 To 20, Deduct	*-158.63*	
		For >20 To 40, Deduct	*-284.10*	
		For >40, Deduct	*-601.36*	
26 56 13 00-0276	EA	30' High, 6.41" Base OD, 11 Gauge, Square Tapered, Steel Area Light Pole, Anchor Base	4,845.48	584.88
		For Galvanized Finish, Add	*110.27*	
		For >10 To 20, Deduct	*-176.27*	
		For >20 To 40, Deduct	*-315.79*	
		For >40, Deduct	*-668.33*	
26 56 13 00-0277	EA	35' High, 6.81" Base OD, 11 Gauge, Square Tapered, Steel Area Light Pole, Anchor Base	5,386.22	617.38
		For Galvanized Finish, Add	*124.54*	
		For >10 To 20, Deduct	*-196.93*	
		For >20 To 40, Deduct	*-352.34*	
		For >40, Deduct	*-746.20*	
26 56 13 00-0278	EA	39' High, 7.18" Base OD, 11 Gauge, Square Tapered, Steel Area Light Pole, Anchor Base	5,678.23	649.87
		For Galvanized Finish, Add	*131.35*	
		For >10 To 20, Deduct	*-207.63*	
		For >20 To 40, Deduct	*-371.48*	
		For >40, Deduct	*-786.75*	
26 56 13 00-0279	EA	20' High, 5.50" Base OD, 7 Gauge, Square Tapered, Steel Area Light Pole, Anchor Base	4,682.56	389.92
		For Galvanized Finish, Add	*117.08*	
		For >10 To 20, Deduct	*-175.60*	
		For >20 To 40, Deduct	*-312.18*	
		For >40, Deduct	*-663.39*	
26 56 13 00-0280	EA	25' High, 6.41" Base OD, 7 Gauge, Square Tapered, Steel Area Light Pole, Anchor Base	5,205.75	519.90
		For Galvanized Finish, Add	*124.98*	
		For >10 To 20, Deduct	*-192.63*	
		For >20 To 40, Deduct	*-343.61*	
		For >40, Deduct	*-728.87*	
26 56 13 00-0281	EA	30' High, 6.41" Base OD, 7 Gauge, Square Tapered, Steel Area Light Pole, Anchor Base	5,541.01	584.88
		For Galvanized Finish, Add	*131.14*	
		For >10 To 20, Deduct	*-204.09*	
		For >20 To 40, Deduct	*-364.48*	
		For >40, Deduct	*-772.66*	
26 56 13 00-0282	EA	30' High, 7.13" Base OD, 7 Gauge, Square Tapered, Steel Area Light Pole, Anchor Base	6,178.58	584.88
		For Galvanized Finish, Add	*150.26*	
		For >10 To 20, Deduct	*-229.60*	
		For >20 To 40, Deduct	*-409.11*	
		For >40, Deduct	*-868.30*	
26 56 13 00-0283	EA	35' High, 7.13" Base OD, 7 Gauge, Square Tapered, Steel Area Light Pole, Anchor Base	6,702.42	617.38
		For Galvanized Finish, Add	*164.03*	
		For >10 To 20, Deduct	*-249.58*	
		For >20 To 40, Deduct	*-444.47*	
		For >40, Deduct	*-943.63*	
26 56 13 00-0284	EA	35' High, 7.88" Base OD, 7 Gauge, Square Tapered, Steel Area Light Pole, Anchor Base	7,492.14	617.38
		For Galvanized Finish, Add	*187.72*	
		For >10 To 20, Deduct	*-281.16*	
		For >20 To 40, Deduct	*-499.75*	
		For >40, Deduct	*-1,062.08*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0285	EA	39' High, 7.13" Base OD, 7 Gauge, Square Tapered, Steel Area Light Pole, Anchor Base	6,803.64	649.87
		For Galvanized Finish, Add	*165.12*	
		For >10 To 20, Deduct	*-252.65*	
		For >20 To 40, Deduct	*-450.26*	
		For >40, Deduct	*-955.56*	
26 56 13 00-0286	EA	39' High, 8.75" Base OD, 7 Gauge, Square Tapered, Steel Area Light Pole, Anchor Base	8,747.75	649.87
		For Galvanized Finish, Add	*223.44*	
		For >10 To 20, Deduct	*-330.41*	
		For >20 To 40, Deduct	*-586.35*	
		For >40, Deduct	*-1,247.18*	
26 56 13 00-0287	EA	45' High, 7.88" Base OD, 7 Gauge, Square Tapered, Steel Area Light Pole, Anchor Base	8,012.26	844.83
		For Galvanized Finish, Add	*189.68*	
		For >10 To 20, Deduct	*-295.15*	
		For >20 To 40, Deduct	*-527.07*	
		For >40, Deduct	*-1,117.36*	
26 56 13 00-0288	EA	45' High, 8.75" Base OD, 7 Gauge, Square Tapered, Steel Area Light Pole, Anchor Base	9,338.12	844.83
		For Galvanized Finish, Add	*229.45*	
		For >10 To 20, Deduct	*-348.18*	
		For >20 To 40, Deduct	*-619.88*	
		For >40, Deduct	*-1,316.24*	
26 56 13 00-0289	EA	50' High, 8.81" Base OD, 7 Gauge, Square Tapered, Steel Area Light Pole, Anchor Base	9,665.68	974.80
		For Galvanized Finish, Add	*231.48*	
		For >10 To 20, Deduct	*-357.38*	
		For >20 To 40, Deduct	*-637.61*	
		For >40, Deduct	*-1,352.37*	

26 56 13 00-0290 Factory Accessories For Steel Area Light Poles *(26 56 13 00-0178)*

26 56 13 00-0291	EA	1/2", 3/4" Or 1" Diameter, Factory Threaded Pipe Coupling Or Nipple For Steel Area Light Poles	85.62
26 56 13 00-0292	EA	Extra Handhole For Steel Area Light Poles	127.34
26 56 13 00-0293	EA	Vibration Dampener For Steel Area Light Poles	129.53

26 56 13 00-0294 Aluminum Area Light Poles *(26 56 13 00-0177)*

Note: Includes satin brushed or painted finish, anchor bolts, base cover, reinforced handhole with cover and grounding provisions, factory drilled fixture mounting holes and tenon, open or capped top.

26 56 13 00-0295 Round Straight, Aluminum Area Light Poles *(26 56 13 00-0294)*

26 56 13 00-0296 Round Straight, Aluminum Area Light Poles, Anchor Base *(26 56 13 00-0295)*

26 56 13 00-0297	EA	8' High, 4" OD, 0.125", Round Straight, Aluminum Area Light Pole, Anchor Base	800.04	194.96
		For Bronze Or Satin Anodized Finish, Add	*41.01*	
		For Black Anodized Finish, Add	*82.02*	
		For >10 To 20, Deduct	*-26.15*	
		For >20 To 40, Deduct	*-48.20*	
		For >40, Deduct	*-100.51*	
26 56 13 00-0298	EA	10' High, 4" OD, 0.125", Round Straight, Aluminum Area Light Pole, Anchor Base	886.06	227.46
		For Bronze Or Satin Anodized Finish, Add	*43.12*	
		For Black Anodized Finish, Add	*86.23*	
		For >10 To 20, Deduct	*-28.62*	
		For >20 To 40, Deduct	*-52.93*	
		For >40, Deduct	*-110.16*	
26 56 13 00-0299	EA	12' High, 4" OD, 0.125", Round Straight, Aluminum Area Light Pole, Anchor Base	977.35	259.95
		For Bronze Or Satin Anodized Finish, Add	*45.75*	
		For Black Anodized Finish, Add	*91.49*	
		For >10 To 20, Deduct	*-31.30*	
		For >20 To 40, Deduct	*-58.02*	
		For >40, Deduct	*-120.61*	
26 56 13 00-0300	EA	14' High, 4" OD, 0.125", Round Straight, Aluminum Area Light Pole, Anchor Base	1,069.67	292.44
		For Bronze Or Satin Anodized Finish, Add	*48.48*	
		For Black Anodized Finish, Add	*96.96*	
		For >10 To 20, Deduct	*-34.01*	
		For >20 To 40, Deduct	*-63.18*	
		For >40, Deduct	*-131.21*	
26 56 13 00-0301	EA	15' High, 4" OD, 0.125", Round Straight, Aluminum Area Light Pole, Anchor Base	1,120.04	308.69
		For Bronze Or Satin Anodized Finish, Add	*50.27*	
		For Black Anodized Finish, Add	*100.53*	
		For >10 To 20, Deduct	*-35.54*	
		For >20 To 40, Deduct	*-66.06*	
		For >40, Deduct	*-137.14*	
26 56 13 00-0302	EA	16' High, 4" OD, 0.125", Round Straight, Aluminum Area Light Pole, Anchor Base	1,169.36	324.93
		For Bronze Or Satin Anodized Finish, Add	*51.95*	
		For Black Anodized Finish, Add	*103.90*	
		For >10 To 20, Deduct	*-37.03*	
		For >20 To 40, Deduct	*-68.86*	
		For >40, Deduct	*-142.91*	
26 56 13 00-0303	EA	16' High, 4" OD, 0.188", Round Straight, Aluminum Area Light Pole, Anchor Base	1,232.46	324.93
		For Bronze Or Satin Anodized Finish, Add	*58.26*	
		For Black Anodized Finish, Add	*116.52*	
		For >10 To 20, Deduct	*-39.55*	
		For >20 To 40, Deduct	*-73.27*	
		For >40, Deduct	*-152.38*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0304	EA	18' High, 4" OD, 0.188", Round Straight, Aluminum Area Light Pole, Anchor Base	1,337.40	357.43
		For Bronze Or Satin Anodized Finish, Add	*62.26*	
		For Black Anodized Finish, Add	*124.51*	
		For >10 To 20, Deduct	*-42.77*	
		For >20 To 40, Deduct	*-79.32*	
		For >40, Deduct	*-164.87*	
26 56 13 00-0305	EA	20' High, 4" OD, 0.188", Round Straight, Aluminum Area Light Pole, Anchor Base	1,436.04	389.92
		For Bronze Or Satin Anodized Finish, Add	*65.62*	
		For Black Anodized Finish, Add	*131.24*	
		For >10 To 20, Deduct	*-45.74*	
		For >20 To 40, Deduct	*-84.93*	
		For >40, Deduct	*-176.41*	
26 56 13 00-0306	EA	15' High, 5" OD, 0.188", Round Straight, Aluminum Area Light Pole, Anchor Base	1,352.45	308.69
		For Bronze Or Satin Anodized Finish, Add	*73.51*	
		For Black Anodized Finish, Add	*147.01*	
		For >10 To 20, Deduct	*-44.84*	
		For >20 To 40, Deduct	*-82.32*	
		For >40, Deduct	*-172.00*	
26 56 13 00-0307	EA	20' High, 5" OD, 0.188", Round Straight, Aluminum Area Light Pole, Anchor Base	1,668.44	389.92
		For Bronze Or Satin Anodized Finish, Add	*88.86*	
		For Black Anodized Finish, Add	*177.72*	
		For >10 To 20, Deduct	*-55.04*	
		For >20 To 40, Deduct	*-101.19*	
		For >40, Deduct	*-211.27*	
26 56 13 00-0308	EA	20' High, 6" OD, 0.188", Round Straight, Aluminum Area Light Pole, Anchor Base	1,786.22	389.92
		For Bronze Or Satin Anodized Finish, Add	*100.64*	
		For Black Anodized Finish, Add	*201.28*	
		For >10 To 20, Deduct	*-59.75*	
		For >20 To 40, Deduct	*-109.44*	
		For >40, Deduct	*-228.94*	
26 56 13 00-0309	EA	25' High, 6" OD, 0.188", Round Straight, Aluminum Area Light Pole, Anchor Base	2,156.59	519.90
		For Bronze Or Satin Anodized Finish, Add	*111.68*	
		For Black Anodized Finish, Add	*223.36*	
		For >10 To 20, Deduct	*-70.67*	
		For >20 To 40, Deduct	*-130.17*	
		For >40, Deduct	*-271.50*	
26 56 13 00-0310	EA	30' High, 6" OD, 0.188", Round Straight, Aluminum Area Light Pole, Anchor Base	2,495.84	584.88
		For Bronze Or Satin Anodized Finish, Add	*132.61*	
		For Black Anodized Finish, Add	*265.21*	
		For >10 To 20, Deduct	*-82.29*	
		For >20 To 40, Deduct	*-151.31*	
		For >40, Deduct	*-315.89*	
26 56 13 00-0311	EA	20' High, 4" OD, 0.250", Round Straight, Aluminum Area Light Pole, Anchor Base	1,508.60	389.92
		For Bronze Or Satin Anodized Finish, Add	*72.88*	
		For Black Anodized Finish, Add	*145.75*	
		For >10 To 20, Deduct	*-48.65*	
		For >20 To 40, Deduct	*-90.01*	
		For >40, Deduct	*-187.30*	
26 56 13 00-0312	EA	20' High, 5" OD, 0.250", Round Straight, Aluminum Area Light Pole, Anchor Base	1,776.76	389.92
		For Bronze Or Satin Anodized Finish, Add	*99.69*	
		For Black Anodized Finish, Add	*199.38*	
		For >10 To 20, Deduct	*-59.37*	
		For >20 To 40, Deduct	*-108.78*	
		For >40, Deduct	*-227.52*	
26 56 13 00-0313	EA	25' High, 5" OD, 0.250", Round Straight, Aluminum Area Light Pole, Anchor Base	2,139.76	519.90
		For Bronze Or Satin Anodized Finish, Add	*110.00*	
		For Black Anodized Finish, Add	*219.99*	
		For >10 To 20, Deduct	*-69.99*	
		For >20 To 40, Deduct	*-128.99*	
		For >40, Deduct	*-268.97*	
26 56 13 00-0314	EA	25' High, 6" OD, 0.250", Round Straight, Aluminum Area Light Pole, Anchor Base	2,292.25	519.90
		For Bronze Or Satin Anodized Finish, Add	*125.25*	
		For Black Anodized Finish, Add	*250.49*	
		For >10 To 20, Deduct	*-76.09*	
		For >20 To 40, Deduct	*-139.66*	
		For >40, Deduct	*-291.85*	
26 56 13 00-0315	EA	30' High, 6" OD, 0.250", Round Straight, Aluminum Area Light Pole, Anchor Base	2,668.30	584.88
		For Bronze Or Satin Anodized Finish, Add	*149.85*	
		For Black Anodized Finish, Add	*299.71*	
		For >10 To 20, Deduct	*-89.19*	
		For >20 To 40, Deduct	*-163.39*	
		For >40, Deduct	*-341.76*	

26 56 13 00-0316 Round Straight, Aluminum Area Light Poles, Hinged Anchor Base *(26 56 13 00-0295)*

26 56 13 00-0317	EA	8' High, 4" OD, 0.125", Round Straight, Aluminum Area Light Pole, Hinged Anchor Base	907.31	194.96
		For Bronze, Satin Or Black Anodized Finish, Add	*77.61*	
		For >10 To 20, Deduct	*-30.44*	
		For >20 To 40, Deduct	*-55.71*	
		For >40, Deduct	*-116.60*	
26 56 13 00-0318	EA	10' High, 4" OD, 0.125", Round Straight, Aluminum Area Light Pole, Hinged Anchor Base	1,014.35	227.46
		For Bronze, Satin Or Black Anodized Finish, Add	*83.92*	
		For >10 To 20, Deduct	*-33.75*	
		For >20 To 40, Deduct	*-61.91*	
		For >40, Deduct	*-129.41*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0319	EA	12' High, 4" OD, 0.125", Round Straight, Aluminum Area Light Pole, Hinged Anchor Base	1,117.21	259.95
		For Bronze, Satin Or Black Anodized Finish, Add	*89.60*	
		For >10 To 20, Deduct	*-36.89*	
		For >20 To 40, Deduct	*-67.81*	
		For >40, Deduct	*-141.59*	
26 56 13 00-0320	EA	14' High, 4" OD, 0.125", Round Straight, Aluminum Area Light Pole, Hinged Anchor Base	1,200.07	292.44
		For Bronze, Satin Or Black Anodized Finish, Add	*92.28*	
		For >10 To 20, Deduct	*-39.23*	
		For >20 To 40, Deduct	*-72.31*	
		For >40, Deduct	*-150.77*	
26 56 13 00-0321	EA	16' High, 4" OD, 0.125", Round Straight, Aluminum Area Light Pole, Hinged Anchor Base	1,295.55	324.93
		For Bronze, Satin Or Black Anodized Finish, Add	*96.85*	
		For >10 To 20, Deduct	*-42.07*	
		For >20 To 40, Deduct	*-77.69*	
		For >40, Deduct	*-161.84*	
26 56 13 00-0322	EA	10' High, 5" OD, 0.125", Round Straight, Aluminum Area Light Pole, Hinged Anchor Base	1,036.43	227.46
		For Bronze, Satin Or Black Anodized Finish, Add	*87.23*	
		For >10 To 20, Deduct	*-34.63*	
		For >20 To 40, Deduct	*-63.45*	
		For >40, Deduct	*-132.72*	
26 56 13 00-0323	EA	12' High, 5" OD, 0.125", Round Straight, Aluminum Area Light Pole, Hinged Anchor Base	1,137.19	259.95
		For Bronze, Satin Or Black Anodized Finish, Add	*92.59*	
		For >10 To 20, Deduct	*-37.69*	
		For >20 To 40, Deduct	*-69.21*	
		For >40, Deduct	*-144.58*	
26 56 13 00-0324	EA	14' High, 5" OD, 0.125", Round Straight, Aluminum Area Light Pole, Hinged Anchor Base	1,241.08	292.44
		For Bronze, Satin Or Black Anodized Finish, Add	*98.43*	
		For >10 To 20, Deduct	*-40.87*	
		For >20 To 40, Deduct	*-75.18*	
		For >40, Deduct	*-156.92*	
26 56 13 00-0325	EA	16' High, 5" OD, 0.125", Round Straight, Aluminum Area Light Pole, Hinged Anchor Base	1,343.93	324.93
		For Bronze, Satin Or Black Anodized Finish, Add	*104.11*	
		For >10 To 20, Deduct	*-44.01*	
		For >20 To 40, Deduct	*-81.08*	
		For >40, Deduct	*-169.10*	
26 56 13 00-0326	EA	18' High, 5" OD, 0.125", Round Straight, Aluminum Area Light Pole, Hinged Anchor Base	1,452.02	357.43
		For Bronze, Satin Or Black Anodized Finish, Add	*110.58*	
		For >10 To 20, Deduct	*-47.36*	
		For >20 To 40, Deduct	*-87.34*	
		For >40, Deduct	*-182.06*	
26 56 13 00-0327	EA	20' High, 5" OD, 0.125", Round Straight, Aluminum Area Light Pole, Hinged Anchor Base	1,553.82	389.92
		For Bronze, Satin Or Black Anodized Finish, Add	*116.10*	
		For >10 To 20, Deduct	*-50.46*	
		For >20 To 40, Deduct	*-93.17*	
		For >40, Deduct	*-194.08*	
26 56 13 00-0328	EA	12' High, 5" OD, 0.156", Round Straight, Aluminum Area Light Pole, Hinged Anchor Base	1,178.20	259.95
		For Bronze, Satin Or Black Anodized Finish, Add	*98.75*	
		For >10 To 20, Deduct	*-39.33*	
		For >20 To 40, Deduct	*-72.08*	
		For >40, Deduct	*-150.74*	
26 56 13 00-0329	EA	14' High, 5" OD, 0.156", Round Straight, Aluminum Area Light Pole, Hinged Anchor Base	1,289.45	292.44
		For Bronze, Satin Or Black Anodized Finish, Add	*105.69*	
		For >10 To 20, Deduct	*-42.80*	
		For >20 To 40, Deduct	*-78.56*	
		For >40, Deduct	*-164.17*	
26 56 13 00-0330	EA	16' High, 5" OD, 0.156", Round Straight, Aluminum Area Light Pole, Hinged Anchor Base	1,399.66	324.93
		For Bronze, Satin Or Black Anodized Finish, Add	*112.47*	
		For >10 To 20, Deduct	*-46.24*	
		For >20 To 40, Deduct	*-84.98*	
		For >40, Deduct	*-177.46*	
26 56 13 00-0331	EA	18' High, 5" OD, 0.156", Round Straight, Aluminum Area Light Pole, Hinged Anchor Base	1,511.96	357.43
		For Bronze, Satin Or Black Anodized Finish, Add	*119.57*	
		For >10 To 20, Deduct	*-49.76*	
		For >20 To 40, Deduct	*-91.54*	
		For >40, Deduct	*-191.05*	
26 56 13 00-0332	EA	16' High, 6" OD, 0.156", Round Straight, Aluminum Area Light Pole, Hinged Anchor Base	1,458.55	324.93
		For Bronze, Satin Or Black Anodized Finish, Add	*121.30*	
		For >10 To 20, Deduct	*-48.59*	
		For >20 To 40, Deduct	*-89.10*	
		For >40, Deduct	*-186.29*	
26 56 13 00-0333	EA	20' High, 6" OD, 0.156", Round Straight, Aluminum Area Light Pole, Hinged Anchor Base	1,691.58	389.92
		For Bronze, Satin Or Black Anodized Finish, Add	*136.76*	
		For >10 To 20, Deduct	*-55.97*	
		For >20 To 40, Deduct	*-102.81*	
		For >40, Deduct	*-214.75*	
26 56 13 00-0334	EA	12' High, 5" OD, 0.188", Round Straight, Aluminum Area Light Pole, Hinged Anchor Base	1,217.11	259.95
		For Bronze, Satin Or Black Anodized Finish, Add	*104.58*	
		For >10 To 20, Deduct	*-40.89*	
		For >20 To 40, Deduct	*-74.80*	
		For >40, Deduct	*-156.57*	
26 56 13 00-0335	EA	14' High, 5" OD, 0.188", Round Straight, Aluminum Area Light Pole, Hinged Anchor Base	1,339.93	292.44
		For Bronze, Satin Or Black Anodized Finish, Add	*113.26*	
		For >10 To 20, Deduct	*-44.82*	
		For >20 To 40, Deduct	*-82.10*	
		For >40, Deduct	*-171.75*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0336	EA	16' High, 5" OD, 0.188", Round Straight, Aluminum Area Light Pole, Hinged Anchor Base	1,452.24	324.93
		For Bronze, Satin Or Black Anodized Finish, Add	*120.36*	
		For >10 To 20, Deduct	*-48.34*	
		For >20 To 40, Deduct	*-88.66*	
		For >40, Deduct	*-185.34*	
26 56 13 00-0337	EA	18' High, 5" OD, 0.188", Round Straight, Aluminum Area Light Pole, Hinged Anchor Base	1,570.85	357.43
		For Bronze, Satin Or Black Anodized Finish, Add	*128.40*	
		For >10 To 20, Deduct	*-52.11*	
		For >20 To 40, Deduct	*-95.66*	
		For >40, Deduct	*-199.89*	
26 56 13 00-0338	EA	20' High, 5" OD, 0.188", Round Straight, Aluminum Area Light Pole, Hinged Anchor Base	1,686.32	389.92
		For Bronze, Satin Or Black Anodized Finish, Add	*135.97*	
		For >10 To 20, Deduct	*-55.76*	
		For >20 To 40, Deduct	*-102.45*	
		For >40, Deduct	*-213.96*	
26 56 13 00-0339	EA	16' High, 6" OD, 0.188", Round Straight, Aluminum Area Light Pole, Hinged Anchor Base	1,529.01	324.93
		For Bronze, Satin Or Black Anodized Finish, Add	*131.87*	
		For >10 To 20, Deduct	*-51.41*	
		For >20 To 40, Deduct	*-94.03*	
		For >40, Deduct	*-196.86*	
26 56 13 00-0340	EA	18' High, 6" OD, 0.188", Round Straight, Aluminum Area Light Pole, Hinged Anchor Base	1,657.08	357.43
		For Bronze, Satin Or Black Anodized Finish, Add	*141.33*	
		For >10 To 20, Deduct	*-55.56*	
		For >20 To 40, Deduct	*-101.70*	
		For >40, Deduct	*-212.82*	
26 56 13 00-0341	EA	20' High, 6" OD, 0.188", Round Straight, Aluminum Area Light Pole, Hinged Anchor Base	1,718.92	389.92
		For Bronze, Satin Or Black Anodized Finish, Add	*140.86*	
		For >10 To 20, Deduct	*-57.06*	
		For >20 To 40, Deduct	*-104.73*	
		For >40, Deduct	*-218.85*	

26 56 13 00-0342 Round Straight, Aluminum Area Light Poles, Direct Burial *(26 56 13 00-0295)*

Note: Includes rubberized undercoating on embedded portion.

26 56 13 00-0343	EA	10' High, 4" OD, 0.125", Round Straight, Aluminum Area Light Pole, Direct Burial	711.92	162.46
		For Bronze Or Satin Anodized Finish, Add	*38.70*	
		For Black Anodized Finish, Add	*77.40*	
		For >10 To 20, Deduct	*-23.60*	
		For >20 To 40, Deduct	*-43.34*	
		For >40, Deduct	*-90.54*	
26 56 13 00-0344	EA	12' High, 4" OD, 0.125", Round Straight, Aluminum Area Light Pole, Direct Burial	764.40	178.72
		For Bronze Or Satin Anodized Finish, Add	*40.70*	
		For Black Anodized Finish, Add	*81.39*	
		For >10 To 20, Deduct	*-25.21*	
		For >20 To 40, Deduct	*-46.36*	
		For >40, Deduct	*-96.79*	
26 56 13 00-0345	EA	14' High, 4" OD, 0.125", Round Straight, Aluminum Area Light Pole, Direct Burial	844.21	194.96
		For Bronze Or Satin Anodized Finish, Add	*45.43*	
		For Black Anodized Finish, Add	*90.86*	
		For >10 To 20, Deduct	*-27.92*	
		For >20 To 40, Deduct	*-51.30*	
		For >40, Deduct	*-107.14*	
26 56 13 00-0346	EA	15' High, 4" OD, 0.125", Round Straight, Aluminum Area Light Pole, Direct Burial	868.40	194.96
		For Bronze Or Satin Anodized Finish, Add	*47.85*	
		For Black Anodized Finish, Add	*95.70*	
		For >10 To 20, Deduct	*-28.89*	
		For >20 To 40, Deduct	*-52.99*	
		For >40, Deduct	*-110.76*	
26 56 13 00-0347	EA	16' High, 4" OD, 0.125", Round Straight, Aluminum Area Light Pole, Direct Burial	898.89	194.96
		For Bronze Or Satin Anodized Finish, Add	*50.90*	
		For Black Anodized Finish, Add	*101.79*	
		For >10 To 20, Deduct	*-30.11*	
		For >20 To 40, Deduct	*-55.12*	
		For >40, Deduct	*-115.34*	
26 56 13 00-0348	EA	18' High, 4" OD, 0.188", Round Straight, Aluminum Area Light Pole, Direct Burial	1,023.93	211.21
		For Bronze Or Satin Anodized Finish, Add	*60.15*	
		For Black Anodized Finish, Add	*120.30*	
		For >10 To 20, Deduct	*-34.62*	
		For >20 To 40, Deduct	*-63.23*	
		For >40, Deduct	*-132.47*	
26 56 13 00-0349	EA	20' High, 4" OD, 0.188", Round Straight, Aluminum Area Light Pole, Direct Burial	1,095.32	227.46
		For Bronze Or Satin Anodized Finish, Add	*64.04*	
		For Black Anodized Finish, Add	*128.08*	
		For >10 To 20, Deduct	*-36.99*	
		For >20 To 40, Deduct	*-67.57*	
		For >40, Deduct	*-141.55*	
26 56 13 00-0350	EA	20' High, 5" OD, 0.188", Round Straight, Aluminum Area Light Pole, Direct Burial	1,258.32	227.46
		For Bronze Or Satin Anodized Finish, Add	*80.34*	
		For Black Anodized Finish, Add	*160.68*	
		For >10 To 20, Deduct	*-43.51*	
		For >20 To 40, Deduct	*-78.98*	
		For >40, Deduct	*-166.00*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0351	EA	25' High, 6" OD, 0.188", Round Straight, Aluminum Area Light Pole, Direct Burial	1,532.59	259.95
		For Bronze Or Satin Anodized Finish, Add	*101.27*	
		For Black Anodized Finish, Add	*202.54*	
		For >10 To 20, Deduct	*-53.51*	
		For >20 To 40, Deduct	*-96.88*	
		For >40, Deduct	*-203.89*	
26 56 13 00-0352	EA	30' High, 6" OD, 0.188", Round Straight, Aluminum Area Light Pole, Direct Burial	1,738.49	292.44
		For Bronze Or Satin Anodized Finish, Add	*115.36*	
		For Black Anodized Finish, Add	*230.72*	
		For >10 To 20, Deduct	*-60.77*	
		For >20 To 40, Deduct	*-110.00*	
		For >40, Deduct	*-231.53*	
26 56 13 00-0353	EA	30' High, 6" OD, 0.250", Round Straight, Aluminum Area Light Pole, Direct Burial	1,930.93	292.44
		For Bronze Or Satin Anodized Finish, Add	*134.61*	
		For Black Anodized Finish, Add	*269.21*	
		For >10 To 20, Deduct	*-68.46*	
		For >20 To 40, Deduct	*-123.47*	
		For >40, Deduct	*-260.40*	

26 56 13 00-0354 Round Tapered, Aluminum Area Light Poles *(26 56 13 00-0294)*

26 56 13 00-0355 Round Tapered, Aluminum Area Light Poles, Anchor Base *(26 56 13 00-0354)*

26 56 13 00-0356	EA	8' High, 4" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Anchor Base	687.52	194.96
		For Bronze Or Satin Anodized Finish, Add	*29.76*	
		For Black Anodized Finish, Add	*59.52*	
		For >10 To 20, Deduct	*-21.65*	
		For >20 To 40, Deduct	*-40.33*	
		For >40, Deduct	*-83.63*	
26 56 13 00-0357	EA	10' High, 4" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Anchor Base	776.69	227.46
		For Bronze Or Satin Anodized Finish, Add	*32.18*	
		For Black Anodized Finish, Add	*64.36*	
		For >10 To 20, Deduct	*-24.24*	
		For >20 To 40, Deduct	*-45.27*	
		For >40, Deduct	*-93.76*	
26 56 13 00-0358	EA	12' High, 4" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Anchor Base	865.88	259.95
		For Bronze Or Satin Anodized Finish, Add	*34.60*	
		For Black Anodized Finish, Add	*69.20*	
		For >10 To 20, Deduct	*-26.84*	
		For >20 To 40, Deduct	*-50.21*	
		For >40, Deduct	*-103.89*	
26 56 13 00-0359	EA	14' High, 4" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Anchor Base	964.51	292.44
		For Bronze Or Satin Anodized Finish, Add	*37.96*	
		For Black Anodized Finish, Add	*75.93*	
		For >10 To 20, Deduct	*-29.81*	
		For >20 To 40, Deduct	*-55.82*	
		For >40, Deduct	*-115.43*	
26 56 13 00-0360	EA	16' High, 4" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Anchor Base	1,062.10	324.93
		For Bronze Or Satin Anodized Finish, Add	*41.22*	
		For Black Anodized Finish, Add	*82.45*	
		For >10 To 20, Deduct	*-32.74*	
		For >20 To 40, Deduct	*-61.35*	
		For >40, Deduct	*-126.82*	
26 56 13 00-0361	EA	10' High, 5" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Anchor Base	804.03	227.46
		For Bronze Or Satin Anodized Finish, Add	*34.91*	
		For Black Anodized Finish, Add	*69.83*	
		For >10 To 20, Deduct	*-25.34*	
		For >20 To 40, Deduct	*-47.18*	
		For >40, Deduct	*-97.86*	
26 56 13 00-0362	EA	12' High, 5" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Anchor Base	908.99	259.95
		For Bronze Or Satin Anodized Finish, Add	*38.91*	
		For Black Anodized Finish, Add	*77.82*	
		For >10 To 20, Deduct	*-28.56*	
		For >20 To 40, Deduct	*-53.23*	
		For >40, Deduct	*-110.35*	
26 56 13 00-0363	EA	14' High, 5" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Anchor Base	1,010.78	292.44
		For Bronze Or Satin Anodized Finish, Add	*42.59*	
		For Black Anodized Finish, Add	*85.18*	
		For >10 To 20, Deduct	*-31.66*	
		For >20 To 40, Deduct	*-59.06*	
		For >40, Deduct	*-122.37*	
26 56 13 00-0364	EA	18' High, 5" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Anchor Base	1,207.00	357.43
		For Bronze Or Satin Anodized Finish, Add	*49.22*	
		For Black Anodized Finish, Add	*98.43*	
		For >10 To 20, Deduct	*-37.56*	
		For >20 To 40, Deduct	*-70.19*	
		For >40, Deduct	*-145.31*	
26 56 13 00-0365	EA	20' High, 5" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Anchor Base	1,298.28	389.92
		For Bronze Or Satin Anodized Finish, Add	*51.84*	
		For Black Anodized Finish, Add	*103.69*	
		For >10 To 20, Deduct	*-40.23*	
		For >20 To 40, Deduct	*-75.28*	
		For >40, Deduct	*-155.75*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0366	EA	12' High, 5" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Anchor Base	947.90	259.95
		For Bronze Or Satin Anodized Finish, Add	*42.80*	
		For Black Anodized Finish, Add	*85.60*	
		For >10 To 20, Deduct	*-30.12*	
		For >20 To 40, Deduct	*-55.96*	
		For >40, Deduct	*-116.19*	
26 56 13 00-0367	EA	14' High, 5" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Anchor Base	1,056.00	292.44
		For Bronze Or Satin Anodized Finish, Add	*47.11*	
		For Black Anodized Finish, Add	*94.22*	
		For >10 To 20, Deduct	*-33.47*	
		For >20 To 40, Deduct	*-62.22*	
		For >40, Deduct	*-129.16*	
26 56 13 00-0368	EA	16' High, 5" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Anchor Base	1,171.46	324.93
		For Bronze Or Satin Anodized Finish, Add	*52.16*	
		For Black Anodized Finish, Add	*104.32*	
		For >10 To 20, Deduct	*-37.11*	
		For >20 To 40, Deduct	*-69.00*	
		For >40, Deduct	*-143.23*	
26 56 13 00-0369	EA	18' High, 5" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Anchor Base	1,267.99	357.43
		For Bronze Or Satin Anodized Finish, Add	*55.31*	
		For Black Anodized Finish, Add	*110.63*	
		For >10 To 20, Deduct	*-40.00*	
		For >20 To 40, Deduct	*-74.46*	
		For >40, Deduct	*-154.46*	
26 56 13 00-0370	EA	20' High, 5" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Anchor Base	1,379.25	389.92
		For Bronze Or Satin Anodized Finish, Add	*59.94*	
		For Black Anodized Finish, Add	*119.88*	
		For >10 To 20, Deduct	*-43.47*	
		For >20 To 40, Deduct	*-80.95*	
		For >40, Deduct	*-167.90*	
26 56 13 00-0371	EA	16' High, 6" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Anchor Base	1,274.52	324.93
		For Bronze Or Satin Anodized Finish, Add	*62.47*	
		For Black Anodized Finish, Add	*124.93*	
		For >10 To 20, Deduct	*-41.23*	
		For >20 To 40, Deduct	*-76.22*	
		For >40, Deduct	*-158.68*	
26 56 13 00-0372	EA	18' High, 6" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Anchor Base	1,399.44	357.43
		For Bronze Or Satin Anodized Finish, Add	*68.46*	
		For Black Anodized Finish, Add	*136.92*	
		For >10 To 20, Deduct	*-45.25*	
		For >20 To 40, Deduct	*-83.66*	
		For >40, Deduct	*-174.17*	
26 56 13 00-0373	EA	20' High, 6" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Anchor Base	1,481.26	389.92
		For Bronze Or Satin Anodized Finish, Add	*70.14*	
		For Black Anodized Finish, Add	*140.28*	
		For >10 To 20, Deduct	*-47.55*	
		For >20 To 40, Deduct	*-88.09*	
		For >40, Deduct	*-183.20*	
26 56 13 00-0374	EA	23' High, 6" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Anchor Base	1,704.83	454.90
		For Bronze Or Satin Anodized Finish, Add	*79.50*	
		For Black Anodized Finish, Add	*159.00*	
		For >10 To 20, Deduct	*-54.55*	
		For >20 To 40, Deduct	*-101.14*	
		For >40, Deduct	*-210.23*	
26 56 13 00-0375	EA	25' High, 6" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Anchor Base	1,934.70	519.90
		For Bronze Or Satin Anodized Finish, Add	*89.49*	
		For Black Anodized Finish, Add	*178.98*	
		For >10 To 20, Deduct	*-61.79*	
		For >20 To 40, Deduct	*-114.63*	
		For >40, Deduct	*-238.22*	
26 56 13 00-0376	EA	18' High, 7" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Anchor Base	1,502.50	357.43
		For Bronze Or Satin Anodized Finish, Add	*78.77*	
		For Black Anodized Finish, Add	*157.53*	
		For >10 To 20, Deduct	*-49.38*	
		For >20 To 40, Deduct	*-90.88*	
		For >40, Deduct	*-189.63*	
26 56 13 00-0377	EA	20' High, 7" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Anchor Base	1,606.40	389.92
		For Bronze Or Satin Anodized Finish, Add	*82.66*	
		For Black Anodized Finish, Add	*165.31*	
		For >10 To 20, Deduct	*-52.56*	
		For >20 To 40, Deduct	*-96.85*	
		For >40, Deduct	*-201.97*	
26 56 13 00-0378	EA	23' High, 7" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Anchor Base	1,803.68	454.90
		For Bronze Or Satin Anodized Finish, Add	*89.39*	
		For Black Anodized Finish, Add	*178.77*	
		For >10 To 20, Deduct	*-58.50*	
		For >20 To 40, Deduct	*-108.06*	
		For >40, Deduct	*-225.06*	
26 56 13 00-0379	EA	25' High, 7" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Anchor Base	2,010.42	519.90
		For Bronze Or Satin Anodized Finish, Add	*97.06*	
		For Black Anodized Finish, Add	*194.13*	
		For >10 To 20, Deduct	*-64.82*	
		For >20 To 40, Deduct	*-119.93*	
		For >40, Deduct	*-249.57*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0380	EA	28' High, 7" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Anchor Base	2,160.58	552.39
		For Bronze Or Satin Anodized Finish, Add	*105.58*	
		For Black Anodized Finish, Add	*211.16*	
		For >10 To 20, Deduct	*-69.85*	
		For >20 To 40, Deduct	*-129.15*	
		For >40, Deduct	*-268.85*	
26 56 13 00-0381	EA	30' High, 7" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Anchor Base	2,312.86	584.88
		For Bronze Or Satin Anodized Finish, Add	*114.31*	
		For Black Anodized Finish, Add	*228.62*	
		For >10 To 20, Deduct	*-74.97*	
		For >20 To 40, Deduct	*-138.50*	
		For >40, Deduct	*-288.44*	
26 56 13 00-0382	EA	23' High, 8" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Anchor Base	1,901.48	454.90
		For Bronze Or Satin Anodized Finish, Add	*99.17*	
		For Black Anodized Finish, Add	*198.33*	
		For >10 To 20, Deduct	*-62.41*	
		For >20 To 40, Deduct	*-114.91*	
		For >40, Deduct	*-239.73*	
26 56 13 00-0383	EA	25' High, 8" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Anchor Base	2,075.62	519.90
		For Bronze Or Satin Anodized Finish, Add	*103.58*	
		For Black Anodized Finish, Add	*207.17*	
		For >10 To 20, Deduct	*-67.43*	
		For >20 To 40, Deduct	*-124.50*	
		For >40, Deduct	*-259.35*	
26 56 13 00-0384	EA	28' High, 8" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Anchor Base	2,231.03	552.39
		For Bronze Or Satin Anodized Finish, Add	*112.63*	
		For Black Anodized Finish, Add	*225.25*	
		For >10 To 20, Deduct	*-72.67*	
		For >20 To 40, Deduct	*-134.08*	
		For >40, Deduct	*-279.42*	
26 56 13 00-0385	EA	30' High, 8" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Anchor Base	2,422.23	584.88
		For Bronze Or Satin Anodized Finish, Add	*125.25*	
		For Black Anodized Finish, Add	*250.49*	
		For >10 To 20, Deduct	*-79.34*	
		For >20 To 40, Deduct	*-146.16*	
		For >40, Deduct	*-304.85*	
26 56 13 00-0386	EA	33' High, 8" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Anchor Base	2,502.04	601.13
		For Bronze Or Satin Anodized Finish, Add	*129.98*	
		For Black Anodized Finish, Add	*259.96*	
		For >10 To 20, Deduct	*-82.05*	
		For >20 To 40, Deduct	*-151.10*	
		For >40, Deduct	*-315.19*	
26 56 13 00-0387	EA	35' High, 8" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Anchor Base	2,661.77	617.38
		For Bronze Or Satin Anodized Finish, Add	*142.70*	
		For Black Anodized Finish, Add	*285.40*	
		For >10 To 20, Deduct	*-87.95*	
		For >20 To 40, Deduct	*-161.63*	
		For >40, Deduct	*-337.53*	
26 56 13 00-0388	EA	12' High, 5" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Anchor Base	991.02	259.95
		For Bronze Or Satin Anodized Finish, Add	*47.11*	
		For Black Anodized Finish, Add	*94.22*	
		For >10 To 20, Deduct	*-31.84*	
		For >20 To 40, Deduct	*-58.97*	
		For >40, Deduct	*-122.66*	
26 56 13 00-0389	EA	14' High, 5" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Anchor Base	1,106.47	292.44
		For Bronze Or Satin Anodized Finish, Add	*52.16*	
		For Black Anodized Finish, Add	*104.32*	
		For >10 To 20, Deduct	*-35.49*	
		For >20 To 40, Deduct	*-65.76*	
		For >40, Deduct	*-136.73*	
26 56 13 00-0390	EA	16' High, 5" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Anchor Base	1,226.15	324.93
		For Bronze Or Satin Anodized Finish, Add	*57.63*	
		For Black Anodized Finish, Add	*115.26*	
		For >10 To 20, Deduct	*-39.30*	
		For >20 To 40, Deduct	*-72.83*	
		For >40, Deduct	*-151.43*	
26 56 13 00-0391	EA	18' High, 5" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Anchor Base	1,334.24	357.43
		For Bronze Or Satin Anodized Finish, Add	*61.94*	
		For Black Anodized Finish, Add	*123.88*	
		For >10 To 20, Deduct	*-42.65*	
		For >20 To 40, Deduct	*-79.10*	
		For >40, Deduct	*-164.39*	
26 56 13 00-0392	EA	20' High, 5" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Anchor Base	1,441.30	389.92
		For Bronze Or Satin Anodized Finish, Add	*66.15*	
		For Black Anodized Finish, Add	*132.29*	
		For >10 To 20, Deduct	*-45.95*	
		For >20 To 40, Deduct	*-85.29*	
		For >40, Deduct	*-177.20*	
26 56 13 00-0393	EA	16' High, 6" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Anchor Base	1,340.77	324.93
		For Bronze Or Satin Anodized Finish, Add	*69.09*	
		For Black Anodized Finish, Add	*138.18*	
		For >10 To 20, Deduct	*-43.88*	
		For >20 To 40, Deduct	*-80.86*	
		For >40, Deduct	*-168.62*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0394	EA	18' High, 6" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Anchor Base	1,468.85	357.43
		For Bronze Or Satin Anodized Finish, Add	*75.40*	
		For Black Anodized Finish, Add	*150.80*	
		For >10 To 20, Deduct	*-48.03*	
		For >20 To 40, Deduct	*-88.52*	
		For >40, Deduct	*-184.59*	
26 56 13 00-0395	EA	20' High, 6" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Anchor Base	1,564.33	389.92
		For Bronze Or Satin Anodized Finish, Add	*78.45*	
		For Black Anodized Finish, Add	*156.90*	
		For >10 To 20, Deduct	*-50.88*	
		For >20 To 40, Deduct	*-93.91*	
		For >40, Deduct	*-195.66*	
26 56 13 00-0396	EA	23' High, 6" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Anchor Base	1,782.65	454.90
		For Bronze Or Satin Anodized Finish, Add	*87.28*	
		For Black Anodized Finish, Add	*174.57*	
		For >10 To 20, Deduct	*-57.66*	
		For >20 To 40, Deduct	*-106.59*	
		For >40, Deduct	*-221.91*	
26 56 13 00-0397	EA	25' High, 6" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Anchor Base	2,007.26	519.90
		For Bronze Or Satin Anodized Finish, Add	*96.75*	
		For Black Anodized Finish, Add	*193.49*	
		For >10 To 20, Deduct	*-64.69*	
		For >20 To 40, Deduct	*-119.71*	
		For >40, Deduct	*-249.10*	
26 56 13 00-0398	EA	23' High, 8" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Anchor Base	2,020.31	454.90
		For Bronze Or Satin Anodized Finish, Add	*111.05*	
		For Black Anodized Finish, Add	*222.10*	
		For >10 To 20, Deduct	*-67.17*	
		For >20 To 40, Deduct	*-123.23*	
		For >40, Deduct	*-257.56*	
26 56 13 00-0399	EA	25' High, 8" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Anchor Base	2,233.36	519.90
		For Bronze Or Satin Anodized Finish, Add	*119.36*	
		For Black Anodized Finish, Add	*238.71*	
		For >10 To 20, Deduct	*-73.74*	
		For >20 To 40, Deduct	*-135.54*	
		For >40, Deduct	*-283.01*	
26 56 13 00-0400	EA	28' High, 8" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Anchor Base	2,401.39	552.39
		For Bronze Or Satin Anodized Finish, Add	*129.66*	
		For Black Anodized Finish, Add	*259.32*	
		For >10 To 20, Deduct	*-79.48*	
		For >20 To 40, Deduct	*-146.00*	
		For >40, Deduct	*-304.97*	
26 56 13 00-0401	EA	30' High, 8" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Anchor Base	2,551.57	584.88
		For Bronze Or Satin Anodized Finish, Add	*138.18*	
		For Black Anodized Finish, Add	*276.36*	
		For >10 To 20, Deduct	*-84.52*	
		For >20 To 40, Deduct	*-155.21*	
		For >40, Deduct	*-324.25*	
26 56 13 00-0402	EA	33' High, 8" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Anchor Base	2,686.07	601.13
		For Bronze Or Satin Anodized Finish, Add	*148.38*	
		For Black Anodized Finish, Add	*296.76*	
		For >10 To 20, Deduct	*-89.41*	
		For >20 To 40, Deduct	*-163.98*	
		For >40, Deduct	*-342.80*	
26 56 13 00-0403	EA	35' High, 8" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Anchor Base	2,803.74	617.38
		For Bronze Or Satin Anodized Finish, Add	*156.90*	
		For Black Anodized Finish, Add	*313.80*	
		For >10 To 20, Deduct	*-93.63*	
		For >20 To 40, Deduct	*-171.57*	
		For >40, Deduct	*-358.82*	
26 56 13 00-0404	EA	37' High, 8" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Anchor Base	2,904.58	633.62
		For Bronze Or Satin Anodized Finish, Add	*163.73*	
		For Black Anodized Finish, Add	*327.47*	
		For >10 To 20, Deduct	*-97.17*	
		For >20 To 40, Deduct	*-177.98*	
		For >40, Deduct	*-372.33*	
26 56 13 00-0405	EA	39' High, 8" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Anchor Base	3,084.31	649.87
		For Bronze Or Satin Anodized Finish, Add	*178.46*	
		For Black Anodized Finish, Add	*356.91*	
		For >10 To 20, Deduct	*-103.88*	
		For >20 To 40, Deduct	*-189.91*	
		For >40, Deduct	*-397.66*	
26 56 13 00-0406	EA	28' High, 10" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Anchor Base	2,855.68	552.39
		For Bronze Or Satin Anodized Finish, Add	*175.09*	
		For Black Anodized Finish, Add	*350.18*	
		For >10 To 20, Deduct	*-97.66*	
		For >20 To 40, Deduct	*-177.80*	
		For >40, Deduct	*-373.11*	
26 56 13 00-0407	EA	30' High, 10" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Anchor Base	3,077.37	584.88
		For Bronze Or Satin Anodized Finish, Add	*190.76*	
		For Black Anodized Finish, Add	*381.52*	
		For >10 To 20, Deduct	*-105.55*	
		For >20 To 40, Deduct	*-192.02*	
		For >40, Deduct	*-403.12*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0408	EA	33' High, 10" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Anchor Base	3,232.90	601.13
		For Bronze Or Satin Anodized Finish, Add	*203.06*	
		For Black Anodized Finish, Add	*406.13*	
		For >10 To 20, Deduct	*-111.28*	
		For >20 To 40, Deduct	*-202.26*	
		For >40, Deduct	*-424.82*	
26 56 13 00-0409	EA	35' High, 10" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Anchor Base	3,351.62	617.38
		For Bronze Or Satin Anodized Finish, Add	*211.69*	
		For Black Anodized Finish, Add	*423.37*	
		For >10 To 20, Deduct	*-115.54*	
		For >20 To 40, Deduct	*-209.92*	
		For >40, Deduct	*-441.01*	
26 56 13 00-0410	EA	37' High, 10" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Anchor Base	3,418.81	633.62
		For Bronze Or Satin Anodized Finish, Add	*215.16*	
		For Black Anodized Finish, Add	*430.31*	
		For >10 To 20, Deduct	*-117.74*	
		For >20 To 40, Deduct	*-213.97*	
		For >40, Deduct	*-449.46*	
26 56 13 00-0411	EA	39' High, 10" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Anchor Base	3,616.41	649.87
		For Bronze Or Satin Anodized Finish, Add	*231.67*	
		For Black Anodized Finish, Add	*463.33*	
		For >10 To 20, Deduct	*-125.16*	
		For >20 To 40, Deduct	*-227.15*	
		For >40, Deduct	*-477.47*	
26 56 13 00-0412	EA	28' High, 8" OD, 0.250", Round Tapered, Aluminum Area Light Pole, Anchor Base	2,711.61	552.39
		For Bronze Or Satin Anodized Finish, Add	*160.68*	
		For Black Anodized Finish, Add	*321.37*	
		For >10 To 20, Deduct	*-91.89*	
		For >20 To 40, Deduct	*-167.72*	
		For >40, Deduct	*-351.50*	
26 56 13 00-0413	EA	30' High, 8" OD, 0.250", Round Tapered, Aluminum Area Light Pole, Anchor Base	2,914.37	584.88
		For Bronze Or Satin Anodized Finish, Add	*174.46*	
		For Black Anodized Finish, Add	*348.92*	
		For >10 To 20, Deduct	*-99.03*	
		For >20 To 40, Deduct	*-180.61*	
		For >40, Deduct	*-378.67*	
26 56 13 00-0414	EA	33' High, 8" OD, 0.250", Round Tapered, Aluminum Area Light Pole, Anchor Base	2,994.19	601.13
		For Bronze Or Satin Anodized Finish, Add	*179.19*	
		For Black Anodized Finish, Add	*358.39*	
		For >10 To 20, Deduct	*-101.73*	
		For >20 To 40, Deduct	*-185.55*	
		For >40, Deduct	*-389.02*	
26 56 13 00-0415	EA	35' High, 8" OD, 0.250", Round Tapered, Aluminum Area Light Pole, Anchor Base	3,194.93	617.38
		For Bronze Or Satin Anodized Finish, Add	*196.02*	
		For Black Anodized Finish, Add	*392.04*	
		For >10 To 20, Deduct	*-109.28*	
		For >20 To 40, Deduct	*-198.95*	
		For >40, Deduct	*-417.50*	
26 56 13 00-0416	EA	37' High, 8" OD, 0.250", Round Tapered, Aluminum Area Light Pole, Anchor Base	3,294.72	633.62
		For Bronze Or Satin Anodized Finish, Add	*202.75*	
		For Black Anodized Finish, Add	*405.50*	
		For >10 To 20, Deduct	*-112.78*	
		For >20 To 40, Deduct	*-205.29*	
		For >40, Deduct	*-430.85*	
26 56 13 00-0417	EA	39' High, 8" OD, 0.250", Round Tapered, Aluminum Area Light Pole, Anchor Base	3,493.38	649.87
		For Bronze Or Satin Anodized Finish, Add	*219.36*	
		For Black Anodized Finish, Add	*438.73*	
		For >10 To 20, Deduct	*-120.24*	
		For >20 To 40, Deduct	*-218.54*	
		For >40, Deduct	*-459.02*	
26 56 13 00-0418	EA	28' High, 10" OD, 0.250", Round Tapered, Aluminum Area Light Pole, Anchor Base	3,369.92	552.39
		For Bronze Or Satin Anodized Finish, Add	*226.52*	
		For Black Anodized Finish, Add	*453.03*	
		For >10 To 20, Deduct	*-118.23*	
		For >20 To 40, Deduct	*-213.80*	
		For >40, Deduct	*-450.25*	
26 56 13 00-0419	EA	30' High, 10" OD, 0.250", Round Tapered, Aluminum Area Light Pole, Anchor Base	3,563.21	584.88
		For Bronze Or Satin Anodized Finish, Add	*239.34*	
		For Black Anodized Finish, Add	*478.69*	
		For >10 To 20, Deduct	*-124.98*	
		For >20 To 40, Deduct	*-226.03*	
		For >40, Deduct	*-475.99*	
26 56 13 00-0420	EA	33' High, 10" OD, 0.250", Round Tapered, Aluminum Area Light Pole, Anchor Base	3,720.84	601.13
		For Bronze Or Satin Anodized Finish, Add	*251.86*	
		For Black Anodized Finish, Add	*503.72*	
		For >10 To 20, Deduct	*-130.80*	
		For >20 To 40, Deduct	*-236.41*	
		For >40, Deduct	*-498.01*	
26 56 13 00-0421	EA	35' High, 10" OD, 0.250", Round Tapered, Aluminum Area Light Pole, Anchor Base	3,963.65	617.38
		For Bronze Or Satin Anodized Finish, Add	*272.89*	
		For Black Anodized Finish, Add	*545.78*	
		For >10 To 20, Deduct	*-140.02*	
		For >20 To 40, Deduct	*-252.76*	
		For >40, Deduct	*-532.81*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0422	EA	37' High, 10" OD, 0.250", Round Tapered, Aluminum Area Light Pole, Anchor Base	4,019.28	633.62
		For Bronze Or Satin Anodized Finish, Add	*275.20*	
		For Black Anodized Finish, Add	*550.41*	
		For >10 To 20, Deduct	*-141.76*	
		For >20 To 40, Deduct	*-256.00*	
		For >40, Deduct	*-539.53*	
26 56 13 00-0423	EA	39' High, 10" OD, 0.250", Round Tapered, Aluminum Area Light Pole, Anchor Base	4,261.05	649.87
		For Bronze Or Satin Anodized Finish, Add	*296.13*	
		For Black Anodized Finish, Add	*592.26*	
		For >10 To 20, Deduct	*-150.95*	
		For >20 To 40, Deduct	*-272.28*	
		For >40, Deduct	*-574.17*	
26 56 13 00-0424	EA	48' High, 10" OD, 0.250", Round Tapered, Aluminum Area Light Pole, Anchor Base	5,397.80	974.80
		For Bronze Or Satin Anodized Finish, Add	*344.82*	
		For Black Anodized Finish, Add	*689.64*	
		For >10 To 20, Deduct	*-186.67*	
		For >20 To 40, Deduct	*-338.85*	
		For >40, Deduct	*-712.19*	
26 56 13 00-0425	EA	50' High, 10" OD, 0.250", Round Tapered, Aluminum Area Light Pole, Anchor Base	5,528.19	974.80
		For Bronze Or Satin Anodized Finish, Add	*357.86*	
		For Black Anodized Finish, Add	*715.72*	
		For >10 To 20, Deduct	*-191.88*	
		For >20 To 40, Deduct	*-347.98*	
		For >40, Deduct	*-731.75*	

26 56 13 00-0426 Round Tapered, Aluminum Area Light Poles, Hinged Anchor Base *(26 56 13 00-0354)*

26 56 13 00-0427	EA	8' High, 4" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Hinged Anchor Base	913.62	194.96
		For Bronze, Satin Or Black Anodized Finish, Add	*78.56*	
		For >10 To 20, Deduct	*-30.70*	
		For >20 To 40, Deduct	*-56.16*	
		For >40, Deduct	*-117.55*	
26 56 13 00-0428	EA	10' High, 4" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Hinged Anchor Base	1,000.68	227.46
		For Bronze, Satin Or Black Anodized Finish, Add	*81.87*	
		For >10 To 20, Deduct	*-33.20*	
		For >20 To 40, Deduct	*-60.95*	
		For >40, Deduct	*-127.36*	
26 56 13 00-0429	EA	12' High, 4" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Hinged Anchor Base	1,088.82	259.95
		For Bronze, Satin Or Black Anodized Finish, Add	*85.34*	
		For >10 To 20, Deduct	*-35.75*	
		For >20 To 40, Deduct	*-65.82*	
		For >40, Deduct	*-137.33*	
26 56 13 00-0430	EA	14' High, 4" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Hinged Anchor Base	1,179.03	292.44
		For Bronze, Satin Or Black Anodized Finish, Add	*89.12*	
		For >10 To 20, Deduct	*-38.39*	
		For >20 To 40, Deduct	*-70.83*	
		For >40, Deduct	*-147.61*	
26 56 13 00-0431	EA	16' High, 4" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Hinged Anchor Base	1,268.21	324.93
		For Bronze, Satin Or Black Anodized Finish, Add	*92.75*	
		For >10 To 20, Deduct	*-40.98*	
		For >20 To 40, Deduct	*-75.78*	
		For >40, Deduct	*-157.74*	
26 56 13 00-0432	EA	10' High, 5" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Hinged Anchor Base	1,013.30	227.46
		For Bronze, Satin Or Black Anodized Finish, Add	*83.76*	
		For >10 To 20, Deduct	*-33.71*	
		For >20 To 40, Deduct	*-61.83*	
		For >40, Deduct	*-129.25*	
26 56 13 00-0433	EA	12' High, 5" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Hinged Anchor Base	1,103.54	259.95
		For Bronze, Satin Or Black Anodized Finish, Add	*87.55*	
		For >10 To 20, Deduct	*-36.34*	
		For >20 To 40, Deduct	*-66.85*	
		For >40, Deduct	*-139.54*	
26 56 13 00-0434	EA	14' High, 5" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Hinged Anchor Base	1,195.86	292.44
		For Bronze, Satin Or Black Anodized Finish, Add	*91.65*	
		For >10 To 20, Deduct	*-39.06*	
		For >20 To 40, Deduct	*-72.01*	
		For >40, Deduct	*-150.14*	
26 56 13 00-0435	EA	16' High, 5" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Hinged Anchor Base	1,287.14	324.93
		For Bronze, Satin Or Black Anodized Finish, Add	*95.59*	
		For >10 To 20, Deduct	*-41.74*	
		For >20 To 40, Deduct	*-77.10*	
		For >40, Deduct	*-160.58*	
26 56 13 00-0436	EA	18' High, 5" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Hinged Anchor Base	1,392.08	357.43
		For Bronze, Satin Or Black Anodized Finish, Add	*101.58*	
		For >10 To 20, Deduct	*-44.96*	
		For >20 To 40, Deduct	*-83.15*	
		For >40, Deduct	*-173.07*	
26 56 13 00-0437	EA	20' High, 5" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Hinged Anchor Base	1,487.57	389.92
		For Bronze, Satin Or Black Anodized Finish, Add	*106.16*	
		For >10 To 20, Deduct	*-47.81*	
		For >20 To 40, Deduct	*-88.53*	
		For >40, Deduct	*-184.14*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0438	EA	12' High, 5" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Hinged Anchor Base	1,144.55	259.95
		For Bronze, Satin Or Black Anodized Finish, Add	*93.70*	
		For >10 To 20, Deduct	*-37.98*	
		For >20 To 40, Deduct	*-69.72*	
		For >40, Deduct	*-145.69*	
26 56 13 00-0439	EA	14' High, 5" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Hinged Anchor Base	1,242.13	292.44
		For Bronze, Satin Or Black Anodized Finish, Add	*98.59*	
		For >10 To 20, Deduct	*-40.91*	
		For >20 To 40, Deduct	*-75.25*	
		For >40, Deduct	*-157.08*	
26 56 13 00-0440	EA	16' High, 5" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Hinged Anchor Base	1,352.34	324.93
		For Bronze, Satin Or Black Anodized Finish, Add	*105.37*	
		For >10 To 20, Deduct	*-44.35*	
		For >20 To 40, Deduct	*-81.67*	
		For >40, Deduct	*-170.36*	
26 56 13 00-0441	EA	18' High, 5" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Hinged Anchor Base	1,452.02	357.43
		For Bronze, Satin Or Black Anodized Finish, Add	*110.58*	
		For >10 To 20, Deduct	*-47.36*	
		For >20 To 40, Deduct	*-87.34*	
		For >40, Deduct	*-182.06*	
26 56 13 00-0442	EA	20' High, 5" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Hinged Anchor Base	1,565.39	389.92
		For Bronze, Satin Or Black Anodized Finish, Add	*117.83*	
		For >10 To 20, Deduct	*-50.92*	
		For >20 To 40, Deduct	*-93.98*	
		For >40, Deduct	*-195.82*	
26 56 13 00-0443	EA	16' High, 6" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Hinged Anchor Base	1,412.28	324.93
		For Bronze, Satin Or Black Anodized Finish, Add	*114.36*	
		For >10 To 20, Deduct	*-46.74*	
		For >20 To 40, Deduct	*-85.86*	
		For >40, Deduct	*-179.35*	
26 56 13 00-0444	EA	18' High, 6" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Hinged Anchor Base	1,532.99	357.43
		For Bronze, Satin Or Black Anodized Finish, Add	*122.72*	
		For >10 To 20, Deduct	*-50.60*	
		For >20 To 40, Deduct	*-93.01*	
		For >40, Deduct	*-194.21*	
26 56 13 00-0445	EA	20' High, 6" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Hinged Anchor Base	1,630.58	389.92
		For Bronze, Satin Or Black Anodized Finish, Add	*127.61*	
		For >10 To 20, Deduct	*-53.53*	
		For >20 To 40, Deduct	*-98.54*	
		For >40, Deduct	*-205.60*	
26 56 13 00-0446	EA	12' High, 5" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Hinged Anchor Base	1,177.15	259.95
		For Bronze, Satin Or Black Anodized Finish, Add	*98.59*	
		For >10 To 20, Deduct	*-39.29*	
		For >20 To 40, Deduct	*-72.00*	
		For >40, Deduct	*-150.58*	
26 56 13 00-0447	EA	14' High, 5" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Hinged Anchor Base	1,291.56	292.44
		For Bronze, Satin Or Black Anodized Finish, Add	*106.00*	
		For >10 To 20, Deduct	*-42.89*	
		For >20 To 40, Deduct	*-78.71*	
		For >40, Deduct	*-164.49*	
26 56 13 00-0448	EA	16' High, 5" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Hinged Anchor Base	1,412.28	324.93
		For Bronze, Satin Or Black Anodized Finish, Add	*114.36*	
		For >10 To 20, Deduct	*-46.74*	
		For >20 To 40, Deduct	*-85.86*	
		For >40, Deduct	*-179.35*	
26 56 13 00-0449	EA	18' High, 5" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Hinged Anchor Base	1,520.38	357.43
		For Bronze, Satin Or Black Anodized Finish, Add	*120.83*	
		For >10 To 20, Deduct	*-50.09*	
		For >20 To 40, Deduct	*-92.13*	
		For >40, Deduct	*-192.31*	
26 56 13 00-0450	EA	20' High, 5" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Hinged Anchor Base	1,635.84	389.92
		For Bronze, Satin Or Black Anodized Finish, Add	*128.40*	
		For >10 To 20, Deduct	*-53.74*	
		For >20 To 40, Deduct	*-98.91*	
		For >40, Deduct	*-206.38*	
26 56 13 00-0451	EA	16' High, 6" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Hinged Anchor Base	1,480.63	324.93
		For Bronze, Satin Or Black Anodized Finish, Add	*124.61*	
		For >10 To 20, Deduct	*-49.48*	
		For >20 To 40, Deduct	*-90.65*	
		For >40, Deduct	*-189.60*	
26 56 13 00-0452	EA	18' High, 6" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Hinged Anchor Base	1,609.76	357.43
		For Bronze, Satin Or Black Anodized Finish, Add	*134.24*	
		For >10 To 20, Deduct	*-53.67*	
		For >20 To 40, Deduct	*-98.39*	
		For >40, Deduct	*-205.72*	
26 56 13 00-0453	EA	20' High, 6" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Hinged Anchor Base	1,712.61	389.92
		For Bronze, Satin Or Black Anodized Finish, Add	*139.92*	
		For >10 To 20, Deduct	*-56.81*	
		For >20 To 40, Deduct	*-104.29*	
		For >40, Deduct	*-217.90*	

26 56 13 00-0454 Round Tapered, Aluminum Area Light Poles, Direct Burial *(26 56 13 00-0354)*
Note: Includes rubberized undercoating on embedded portion.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0455	EA	8' High, 4" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Direct Burial	636.20	162.46
		For Bronze Or Satin Anodized Finish, Add	*31.13*	
		For Black Anodized Finish, Add	*62.25*	
		For >10 To 20, Deduct	*-20.57*	
		For >20 To 40, Deduct	*-38.04*	
		For >40, Deduct	*-79.18*	
26 56 13 00-0456	EA	10' High, 4" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Direct Burial	665.65	162.46
		For Bronze Or Satin Anodized Finish, Add	*34.07*	
		For Black Anodized Finish, Add	*68.14*	
		For >10 To 20, Deduct	*-21.75*	
		For >20 To 40, Deduct	*-40.10*	
		For >40, Deduct	*-83.60*	
26 56 13 00-0457	EA	12' High, 4" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Direct Burial	722.34	178.72
		For Bronze Or Satin Anodized Finish, Add	*36.49*	
		For Black Anodized Finish, Add	*72.98*	
		For >10 To 20, Deduct	*-23.53*	
		For >20 To 40, Deduct	*-43.42*	
		For >40, Deduct	*-90.48*	
26 56 13 00-0458	EA	14' High, 4" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Direct Burial	771.65	194.96
		For Bronze Or Satin Anodized Finish, Add	*38.17*	
		For Black Anodized Finish, Add	*76.35*	
		For >10 To 20, Deduct	*-25.02*	
		For >20 To 40, Deduct	*-46.22*	
		For >40, Deduct	*-96.25*	
26 56 13 00-0459	EA	16' High, 4" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Direct Burial	809.51	194.96
		For Bronze Or Satin Anodized Finish, Add	*41.96*	
		For Black Anodized Finish, Add	*83.92*	
		For >10 To 20, Deduct	*-26.53*	
		For >20 To 40, Deduct	*-48.87*	
		For >40, Deduct	*-101.93*	
26 56 13 00-0460	EA	12' High, 5" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Direct Burial	750.73	178.72
		For Bronze Or Satin Anodized Finish, Add	*39.33*	
		For Black Anodized Finish, Add	*78.66*	
		For >10 To 20, Deduct	*-24.67*	
		For >20 To 40, Deduct	*-45.40*	
		For >40, Deduct	*-94.74*	
26 56 13 00-0461	EA	14' High, 5" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Direct Burial	812.66	194.96
		For Bronze Or Satin Anodized Finish, Add	*42.27*	
		For Black Anodized Finish, Add	*84.55*	
		For >10 To 20, Deduct	*-26.66*	
		For >20 To 40, Deduct	*-49.09*	
		For >40, Deduct	*-102.40*	
26 56 13 00-0462	EA	16' High, 5" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Direct Burial	833.70	194.96
		For Bronze Or Satin Anodized Finish, Add	*44.38*	
		For Black Anodized Finish, Add	*88.76*	
		For >10 To 20, Deduct	*-27.50*	
		For >20 To 40, Deduct	*-50.56*	
		For >40, Deduct	*-105.56*	
26 56 13 00-0463	EA	18' High, 5" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Direct Burial	899.84	211.21
		For Bronze Or Satin Anodized Finish, Add	*47.74*	
		For Black Anodized Finish, Add	*95.49*	
		For >10 To 20, Deduct	*-29.66*	
		For >20 To 40, Deduct	*-54.54*	
		For >40, Deduct	*-113.86*	
26 56 13 00-0464	EA	20' High, 5" OD, 0.125", Round Tapered, Aluminum Area Light Pole, Direct Burial	961.77	227.46
		For Bronze Or Satin Anodized Finish, Add	*50.69*	
		For Black Anodized Finish, Add	*101.37*	
		For >10 To 20, Deduct	*-31.65*	
		For >20 To 40, Deduct	*-58.23*	
		For >40, Deduct	*-121.52*	
26 56 13 00-0465	EA	16' High, 5" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Direct Burial	894.69	194.96
		For Bronze Or Satin Anodized Finish, Add	*50.48*	
		For Black Anodized Finish, Add	*100.95*	
		For >10 To 20, Deduct	*-29.94*	
		For >20 To 40, Deduct	*-54.83*	
		For >40, Deduct	*-114.71*	
26 56 13 00-0466	EA	18' High, 5" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Direct Burial	967.14	211.21
		For Bronze Or Satin Anodized Finish, Add	*54.47*	
		For Black Anodized Finish, Add	*108.95*	
		For >10 To 20, Deduct	*-32.35*	
		For >20 To 40, Deduct	*-59.25*	
		For >40, Deduct	*-123.95*	
26 56 13 00-0467	EA	20' High, 5" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Direct Burial	1,034.33	227.46
		For Bronze Or Satin Anodized Finish, Add	*57.94*	
		For Black Anodized Finish, Add	*115.89*	
		For >10 To 20, Deduct	*-34.55*	
		For >20 To 40, Deduct	*-63.31*	
		For >40, Deduct	*-132.40*	
26 56 13 00-0468	EA	18' High, 6" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Direct Burial	1,053.37	211.21
		For Bronze Or Satin Anodized Finish, Add	*63.10*	
		For Black Anodized Finish, Add	*126.19*	
		For >10 To 20, Deduct	*-35.80*	
		For >20 To 40, Deduct	*-65.29*	
		For >40, Deduct	*-136.89*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0469	EA	25' High, 6" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Direct Burial	1,347.51	259.95
		For Bronze Or Satin Anodized Finish, Add	*82.76*	
		For Black Anodized Finish, Add	*165.52*	
		For >10 To 20, Deduct	*-46.10*	
		For >20 To 40, Deduct	*-83.93*	
		For >40, Deduct	*-176.13*	
26 56 13 00-0470	EA	25' High, 6" OD, 0.188", Round Tapered, Aluminum Area Light Pole, Direct Burial	1,466.34	259.95
		For Bronze Or Satin Anodized Finish, Add	*94.64*	
		For Black Anodized Finish, Add	*189.29*	
		For >10 To 20, Deduct	*-50.86*	
		For >20 To 40, Deduct	*-92.25*	
		For >40, Deduct	*-193.96*	
26 56 13 00-0471	EA	30' High, 7" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Direct Burial	1,633.33	292.44
		For Bronze Or Satin Anodized Finish, Add	*104.85*	
		For Black Anodized Finish, Add	*209.69*	
		For >10 To 20, Deduct	*-56.56*	
		For >20 To 40, Deduct	*-102.64*	
		For >40, Deduct	*-215.76*	
26 56 13 00-0472	EA	30' High, 8" OD, 0.156", Round Tapered, Aluminum Area Light Pole, Direct Burial	1,762.67	292.44
		For Bronze Or Satin Anodized Finish, Add	*117.78*	
		For Black Anodized Finish, Add	*235.56*	
		For >10 To 20, Deduct	*-61.73*	
		For >20 To 40, Deduct	*-111.69*	
		For >40, Deduct	*-235.16*	

26 56 13 00-0473 Square Straight, Aluminum Area Light Poles *(26 56 13 00-0294)*

26 56 13 00-0474 Square Straight, Aluminum Area Light Poles, Anchor Base *(26 56 13 00-0473)*

26 56 13 00-0475	EA	8' High, 4" OD, 0.125", Square Straight, Aluminum Area Light Pole, Anchor Base	824.23	194.96
		For Bronze Or Satin Anodized Finish, Add	*43.43*	
		For Black Anodized Finish, Add	*86.86*	
		For >10 To 20, Deduct	*-27.12*	
		For >20 To 40, Deduct	*-49.90*	
		For >40, Deduct	*-104.14*	
26 56 13 00-0476	EA	10' High, 4" OD, 0.125", Square Straight, Aluminum Area Light Pole, Anchor Base	911.29	227.46
		For Bronze Or Satin Anodized Finish, Add	*45.64*	
		For Black Anodized Finish, Add	*91.28*	
		For >10 To 20, Deduct	*-29.63*	
		For >20 To 40, Deduct	*-54.69*	
		For >40, Deduct	*-113.95*	
26 56 13 00-0477	EA	12' High, 4" OD, 0.125", Square Straight, Aluminum Area Light Pole, Anchor Base	1,006.79	259.95
		For Bronze Or Satin Anodized Finish, Add	*48.69*	
		For Black Anodized Finish, Add	*97.38*	
		For >10 To 20, Deduct	*-32.47*	
		For >20 To 40, Deduct	*-60.08*	
		For >40, Deduct	*-125.02*	
26 56 13 00-0478	EA	14' High, 4" OD, 0.125", Square Straight, Aluminum Area Light Pole, Anchor Base	1,101.22	292.44
		For Bronze Or Satin Anodized Finish, Add	*51.63*	
		For Black Anodized Finish, Add	*103.27*	
		For >10 To 20, Deduct	*-35.28*	
		For >20 To 40, Deduct	*-65.39*	
		For >40, Deduct	*-135.94*	
26 56 13 00-0479	EA	15' High, 4" OD, 0.125", Square Straight, Aluminum Area Light Pole, Anchor Base	1,152.64	308.69
		For Bronze Or Satin Anodized Finish, Add	*53.53*	
		For Black Anodized Finish, Add	*107.05*	
		For >10 To 20, Deduct	*-36.84*	
		For >20 To 40, Deduct	*-68.34*	
		For >40, Deduct	*-142.03*	
26 56 13 00-0480	EA	16' High, 4" OD, 0.125", Square Straight, Aluminum Area Light Pole, Anchor Base	1,204.06	324.93
		For Bronze Or Satin Anodized Finish, Add	*55.42*	
		For Black Anodized Finish, Add	*110.84*	
		For >10 To 20, Deduct	*-38.41*	
		For >20 To 40, Deduct	*-71.29*	
		For >40, Deduct	*-148.12*	
26 56 13 00-0481	EA	18' High, 4" OD, 0.125", Square Straight, Aluminum Area Light Pole, Anchor Base	1,304.80	357.43
		For Bronze Or Satin Anodized Finish, Add	*59.00*	
		For Black Anodized Finish, Add	*117.99*	
		For >10 To 20, Deduct	*-41.47*	
		For >20 To 40, Deduct	*-77.04*	
		For >40, Deduct	*-159.98*	
26 56 13 00-0482	EA	20' High, 4" OD, 0.125", Square Straight, Aluminum Area Light Pole, Anchor Base	1,415.01	389.92
		For Bronze Or Satin Anodized Finish, Add	*63.52*	
		For Black Anodized Finish, Add	*127.03*	
		For >10 To 20, Deduct	*-44.90*	
		For >20 To 40, Deduct	*-83.45*	
		For >40, Deduct	*-173.26*	
26 56 13 00-0483	EA	16' High, 4" OD, 0.188", Square Straight, Aluminum Area Light Pole, Anchor Base	1,276.62	324.93
		For Bronze Or Satin Anodized Finish, Add	*62.68*	
		For Black Anodized Finish, Add	*125.35*	
		For >10 To 20, Deduct	*-41.32*	
		For >20 To 40, Deduct	*-76.37*	
		For >40, Deduct	*-159.00*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0484	EA	18' High, 4" OD, 0.188", Square Straight, Aluminum Area Light Pole, Anchor Base	1,379.46	357.43
		For Bronze Or Satin Anodized Finish, Add	*66.46*	
		For Black Anodized Finish, Add	*132.92*	
		For >10 To 20, Deduct	*-44.46*	
		For >20 To 40, Deduct	*-82.27*	
		For >40, Deduct	*-171.18*	
26 56 13 00-0485	EA	20' High, 4" OD, 0.188", Square Straight, Aluminum Area Light Pole, Anchor Base	1,495.98	389.92
		For Bronze Or Satin Anodized Finish, Add	*71.61*	
		For Black Anodized Finish, Add	*143.23*	
		For >10 To 20, Deduct	*-48.14*	
		For >20 To 40, Deduct	*-89.12*	
		For >40, Deduct	*-185.41*	
26 56 13 00-0486	EA	15' High, 5" OD, 0.188", Square Straight, Aluminum Area Light Pole, Anchor Base	1,468.12	308.69
		For Bronze Or Satin Anodized Finish, Add	*85.07*	
		For Black Anodized Finish, Add	*170.15*	
		For >10 To 20, Deduct	*-49.46*	
		For >20 To 40, Deduct	*-90.42*	
		For >40, Deduct	*-189.35*	
26 56 13 00-0487	EA	20' High, 5" OD, 0.188", Square Straight, Aluminum Area Light Pole, Anchor Base	1,797.79	389.92
		For Bronze Or Satin Anodized Finish, Add	*101.80*	
		For Black Anodized Finish, Add	*203.59*	
		For >10 To 20, Deduct	*-60.21*	
		For >20 To 40, Deduct	*-110.25*	
		For >40, Deduct	*-230.68*	
26 56 13 00-0488	EA	25' High, 5" OD, 0.188", Square Straight, Aluminum Area Light Pole, Anchor Base	2,189.19	519.90
		For Bronze Or Satin Anodized Finish, Add	*114.94*	
		For Black Anodized Finish, Add	*229.88*	
		For >10 To 20, Deduct	*-71.97*	
		For >20 To 40, Deduct	*-132.45*	
		For >40, Deduct	*-276.39*	
26 56 13 00-0489	EA	20' High, 4" OD, 0.250", Square Straight, Aluminum Area Light Pole, Anchor Base	1,561.18	389.92
		For Bronze Or Satin Anodized Finish, Add	*78.13*	
		For Black Anodized Finish, Add	*156.27*	
		For >10 To 20, Deduct	*-50.75*	
		For >20 To 40, Deduct	*-93.69*	
		For >40, Deduct	*-195.19*	
26 56 13 00-0490	EA	20' High, 5" OD, 0.250", Square Straight, Aluminum Area Light Pole, Anchor Base	1,925.03	389.92
		For Bronze Or Satin Anodized Finish, Add	*114.52*	
		For Black Anodized Finish, Add	*229.04*	
		For >10 To 20, Deduct	*-65.30*	
		For >20 To 40, Deduct	*-119.16*	
		For >40, Deduct	*-249.76*	
26 56 13 00-0491	EA	25' High, 5" OD, 0.250", Square Straight, Aluminum Area Light Pole, Anchor Base	2,304.86	519.90
		For Bronze Or Satin Anodized Finish, Add	*126.51*	
		For Black Anodized Finish, Add	*253.01*	
		For >10 To 20, Deduct	*-76.60*	
		For >20 To 40, Deduct	*-140.54*	
		For >40, Deduct	*-293.74*	
26 56 13 00-0492	EA	20' High, 6" OD, 0.250", Square Straight, Aluminum Area Light Pole, Anchor Base	2,124.84	389.92
		For Bronze Or Satin Anodized Finish, Add	*134.50*	
		For Black Anodized Finish, Add	*269.00*	
		For >10 To 20, Deduct	*-73.30*	
		For >20 To 40, Deduct	*-133.14*	
		For >40, Deduct	*-279.73*	
26 56 13 00-0493	EA	25' High, 6" OD, 0.250", Square Straight, Aluminum Area Light Pole, Anchor Base	2,565.66	519.90
		For Bronze Or Satin Anodized Finish, Add	*152.59*	
		For Black Anodized Finish, Add	*305.17*	
		For >10 To 20, Deduct	*-87.03*	
		For >20 To 40, Deduct	*-158.80*	
		For >40, Deduct	*-332.86*	
26 56 13 00-0494	EA	30' High, 6" OD, 0.250", Square Straight, Aluminum Area Light Pole, Anchor Base	2,966.95	584.88
		For Bronze Or Satin Anodized Finish, Add	*179.72*	
		For Black Anodized Finish, Add	*359.44*	
		For >10 To 20, Deduct	*-101.13*	
		For >20 To 40, Deduct	*-184.29*	
		For >40, Deduct	*-386.55*	

26 56 13 00-0495 Square Straight, Aluminum Area Light Poles, Direct Burial *(26 56 13 00-0473)*

Note: Includes rubberized undercoating on embedded portion.

26 56 13 00-0496	EA	10' High, 4" OD, 0.125", Square Straight, Aluminum Area Light Pole, Direct Burial	739.26	162.46
		For Bronze Or Satin Anodized Finish, Add	*41.43*	
		For Black Anodized Finish, Add	*82.87*	
		For >10 To 20, Deduct	*-24.70*	
		For >20 To 40, Deduct	*-45.25*	
		For >40, Deduct	*-94.64*	
26 56 13 00-0497	EA	12' High, 4" OD, 0.125", Square Straight, Aluminum Area Light Pole, Direct Burial	825.39	178.72
		For Bronze Or Satin Anodized Finish, Add	*46.80*	
		For Black Anodized Finish, Add	*93.59*	
		For >10 To 20, Deduct	*-27.65*	
		For >20 To 40, Deduct	*-50.63*	
		For >40, Deduct	*-105.94*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0498	EA	14' High, 4" OD, 0.125", Square Straight, Aluminum Area Light Pole, Direct Burial	879.97	194.96
		For Bronze Or Satin Anodized Finish, Add	*49.01*	
		For Black Anodized Finish, Add	*98.01*	
		For >10 To 20, Deduct	*-29.35*	
		For >20 To 40, Deduct	*-53.80*	
		For >40, Deduct	*-112.50*	
26 56 13 00-0499	EA	15' High, 4" OD, 0.125", Square Straight, Aluminum Area Light Pole, Direct Burial	906.26	194.96
		For Bronze Or Satin Anodized Finish, Add	*51.63*	
		For Black Anodized Finish, Add	*103.27*	
		For >10 To 20, Deduct	*-30.40*	
		For >20 To 40, Deduct	*-55.64*	
		For >40, Deduct	*-116.44*	
26 56 13 00-0500	EA	16' High, 4" OD, 0.125", Square Straight, Aluminum Area Light Pole, Direct Burial	938.86	194.96
		For Bronze Or Satin Anodized Finish, Add	*54.89*	
		For Black Anodized Finish, Add	*109.79*	
		For >10 To 20, Deduct	*-31.71*	
		For >20 To 40, Deduct	*-57.92*	
		For >40, Deduct	*-121.33*	
26 56 13 00-0501	EA	18' High, 4" OD, 0.188", Square Straight, Aluminum Area Light Pole, Direct Burial	1,082.81	211.21
		For Bronze Or Satin Anodized Finish, Add	*66.04*	
		For Black Anodized Finish, Add	*132.08*	
		For >10 To 20, Deduct	*-36.98*	
		For >20 To 40, Deduct	*-67.35*	
		For >40, Deduct	*-141.30*	
26 56 13 00-0502	EA	20' High, 4" OD, 0.188", Square Straight, Aluminum Area Light Pole, Direct Burial	1,160.52	227.46
		For Bronze Or Satin Anodized Finish, Add	*70.56*	
		For Black Anodized Finish, Add	*141.12*	
		For >10 To 20, Deduct	*-39.60*	
		For >20 To 40, Deduct	*-72.14*	
		For >40, Deduct	*-151.33*	
26 56 13 00-0503	EA	20' High, 5" OD, 0.188", Square Straight, Aluminum Area Light Pole, Direct Burial	1,325.62	227.46
		For Bronze Or Satin Anodized Finish, Add	*87.07*	
		For Black Anodized Finish, Add	*174.14*	
		For >10 To 20, Deduct	*-46.20*	
		For >20 To 40, Deduct	*-83.70*	
		For >40, Deduct	*-176.10*	
26 56 13 00-0504	EA	25' High, 5" OD, 0.188", Square Straight, Aluminum Area Light Pole, Direct Burial	1,523.13	259.95
		For Bronze Or Satin Anodized Finish, Add	*100.32*	
		For Black Anodized Finish, Add	*200.65*	
		For >10 To 20, Deduct	*-53.13*	
		For >20 To 40, Deduct	*-96.22*	
		For >40, Deduct	*-202.47*	
26 56 13 00-0505	EA	25' High, 6" OD, 0.250", Square Straight, Aluminum Area Light Pole, Direct Burial	1,892.24	259.95
		For Bronze Or Satin Anodized Finish, Add	*137.23*	
		For Black Anodized Finish, Add	*274.47*	
		For >10 To 20, Deduct	*-67.89*	
		For >20 To 40, Deduct	*-122.06*	
		For >40, Deduct	*-257.84*	

26 56 13 00-0506 Factory Accessories For Aluminum Area Light Poles *(26 56 13 00-0294)*

26 56 13 00-0507	EA	1/2", 3/4" Or 1" Diameter, Factory Threaded Pipe Coupling Or Nipple For Aluminum Area Light Poles	85.62
26 56 13 00-0508	EA	Extra Handhole For Aluminum Area Light Poles	39.20
26 56 13 00-0509	EA	Vibration Dampener For Aluminum Area Light Poles	129.53

26 56 13 00-0510 Fiberglass Area Light Poles *(26 56 13 00-0177)*

Note: Includes UV resistant textured weave finish, anchor bolts, base cover, reinforced handhole with cover and grounding provisions and tenon top.

26 56 13 00-0511 Round Tapered, Fiberglass Area Light Poles *(26 56 13 00-0510)*

26 56 13 00-0512 Round Tapered, Fiberglass Area Light Poles, Anchor Base *(26 56 13 00-0511)*

26 56 13 00-0513	EA	10' High, 3.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	1,245.42	227.46
		For >10 To 20, Deduct	*-42.99*	
		For >20 To 40, Deduct	*-78.08*	
		For >40, Deduct	*-164.07*	
26 56 13 00-0514	EA	12' High, 3.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	1,357.47	259.95
		For >10 To 20, Deduct	*-46.50*	
		For >20 To 40, Deduct	*-84.62*	
		For >40, Deduct	*-177.63*	
26 56 13 00-0515	EA	14' High, 3.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	1,470.85	292.44
		For >10 To 20, Deduct	*-50.06*	
		For >20 To 40, Deduct	*-91.26*	
		For >40, Deduct	*-191.38*	
26 56 13 00-0516	EA	16' High, 3.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	1,582.90	324.93
		For >10 To 20, Deduct	*-53.57*	
		For >20 To 40, Deduct	*-97.81*	
		For >40, Deduct	*-204.94*	
26 56 13 00-0517	EA	18' High, 3.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	1,719.13	357.43
		For >10 To 20, Deduct	*-58.04*	
		For >20 To 40, Deduct	*-106.04*	
		For >40, Deduct	*-222.13*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0518	EA	20' High, 3.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	1,833.87	389.92
		For >10 To 20, Deduct	*-61.66*	
		For >20 To 40, Deduct	*-112.77*	
		For >40, Deduct	*-236.09*	
26 56 13 00-0519	EA	22' High, 3.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	2,012.24	454.90
		For >10 To 20, Deduct	*-66.84*	
		For >20 To 40, Deduct	*-122.66*	
		For >40, Deduct	*-256.35*	
26 56 13 00-0520	EA	24' High, 3.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	2,189.27	519.90
		For >10 To 20, Deduct	*-71.97*	
		For >20 To 40, Deduct	*-132.45*	
		For >40, Deduct	*-276.40*	
26 56 13 00-0521	EA	26' High, 3.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	2,298.17	519.90
		For >10 To 20, Deduct	*-76.33*	
		For >20 To 40, Deduct	*-140.08*	
		For >40, Deduct	*-292.74*	
26 56 13 00-0522	EA	28' High, 3.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	2,458.60	552.39
		For >10 To 20, Deduct	*-81.77*	
		For >20 To 40, Deduct	*-150.01*	
		For >40, Deduct	*-313.55*	
26 56 13 00-0523	EA	30' High, 3.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	2,619.05	584.88
		For >10 To 20, Deduct	*-87.22*	
		For >20 To 40, Deduct	*-159.94*	
		For >40, Deduct	*-334.37*	
26 56 13 00-0524	EA	10' High, 4.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	1,369.11	227.46
		For >10 To 20, Deduct	*-47.94*	
		For >20 To 40, Deduct	*-86.74*	
		For >40, Deduct	*-182.62*	
26 56 13 00-0525	EA	12' High, 4.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	1,456.96	259.95
		For >10 To 20, Deduct	*-50.48*	
		For >20 To 40, Deduct	*-91.59*	
		For >40, Deduct	*-192.55*	
26 56 13 00-0526	EA	14' High, 4.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	1,546.14	292.44
		For >10 To 20, Deduct	*-53.07*	
		For >20 To 40, Deduct	*-96.53*	
		For >40, Deduct	*-202.68*	
26 56 13 00-0527	EA	16' High, 4.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	1,638.02	324.93
		For >10 To 20, Deduct	*-55.77*	
		For >20 To 40, Deduct	*-101.66*	
		For >40, Deduct	*-213.21*	
26 56 13 00-0528	EA	18' High, 4.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	1,736.61	357.43
		For >10 To 20, Deduct	*-58.74*	
		For >20 To 40, Deduct	*-107.27*	
		For >40, Deduct	*-224.75*	
26 56 13 00-0529	EA	20' High, 4.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	1,833.87	389.92
		For >10 To 20, Deduct	*-61.66*	
		For >20 To 40, Deduct	*-112.77*	
		For >40, Deduct	*-236.09*	
26 56 13 00-0530	EA	22' High, 4.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	1,996.11	454.90
		For >10 To 20, Deduct	*-66.20*	
		For >20 To 40, Deduct	*-121.53*	
		For >40, Deduct	*-253.93*	
26 56 13 00-0531	EA	24' High, 4.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	2,189.27	519.90
		For >10 To 20, Deduct	*-71.97*	
		For >20 To 40, Deduct	*-132.45*	
		For >40, Deduct	*-276.40*	
26 56 13 00-0532	EA	26' High, 4.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	2,234.98	519.90
		For >10 To 20, Deduct	*-73.80*	
		For >20 To 40, Deduct	*-135.65*	
		For >40, Deduct	*-283.26*	
26 56 13 00-0533	EA	28' High, 4.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	2,347.01	552.39
		For >10 To 20, Deduct	*-77.31*	
		For >20 To 40, Deduct	*-142.20*	
		For >40, Deduct	*-296.81*	
26 56 13 00-0534	EA	30' High, 4.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	2,459.07	584.88
		For >10 To 20, Deduct	*-80.82*	
		For >20 To 40, Deduct	*-148.74*	
		For >40, Deduct	*-310.37*	
26 56 13 00-0535	EA	10' High, 5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	1,550.60	227.46
		For >10 To 20, Deduct	*-55.20*	
		For >20 To 40, Deduct	*-99.44*	
		For >40, Deduct	*-209.85*	
26 56 13 00-0536	EA	12' High, 5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	1,657.28	259.95
		For >10 To 20, Deduct	*-58.49*	
		For >20 To 40, Deduct	*-105.61*	
		For >40, Deduct	*-222.60*	
26 56 13 00-0537	EA	14' High, 5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	1,763.94	292.44
		For >10 To 20, Deduct	*-61.78*	
		For >20 To 40, Deduct	*-111.78*	
		For >40, Deduct	*-235.35*	
26 56 13 00-0538	EA	16' High, 5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	1,871.95	324.93
		For >10 To 20, Deduct	*-65.13*	
		For >20 To 40, Deduct	*-118.04*	
		For >40, Deduct	*-248.30*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0539	EA	18' High, 5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	1,985.33	357.43
		For >10 To 20, Deduct	*-68.69*	
		For >20 To 40, Deduct	*-124.68*	
		For >40, Deduct	*-262.06*	
26 56 13 00-0540	EA	20' High, 5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	2,106.78	389.92
		For >10 To 20, Deduct	*-72.57*	
		For >20 To 40, Deduct	*-131.88*	
		For >40, Deduct	*-277.03*	
26 56 13 00-0541	EA	22' High, 5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	2,305.33	454.90
		For >10 To 20, Deduct	*-78.57*	
		For >20 To 40, Deduct	*-143.18*	
		For >40, Deduct	*-300.31*	
26 56 13 00-0542	EA	24' High, 5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	2,505.21	519.90
		For >10 To 20, Deduct	*-84.61*	
		For >20 To 40, Deduct	*-154.57*	
		For >40, Deduct	*-323.79*	
26 56 13 00-0543	EA	26' High, 5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	2,575.12	519.90
		For >10 To 20, Deduct	*-87.41*	
		For >20 To 40, Deduct	*-159.46*	
		For >40, Deduct	*-334.28*	
26 56 13 00-0544	EA	28' High, 5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	2,750.34	552.39
		For >10 To 20, Deduct	*-93.44*	
		For >20 To 40, Deduct	*-170.43*	
		For >40, Deduct	*-357.31*	
26 56 13 00-0545	EA	30' High, 5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	2,894.66	584.88
		For >10 To 20, Deduct	*-98.24*	
		For >20 To 40, Deduct	*-179.23*	
		For >40, Deduct	*-375.71*	
26 56 13 00-0546	EA	32' High, 5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	3,006.47	601.13
		For >10 To 20, Deduct	*-102.22*	
		For >20 To 40, Deduct	*-186.41*	
		For >40, Deduct	*-390.86*	
26 56 13 00-0547	EA	34' High, 5" Top OD, Round Tapered, Fiberglass Area Light Pole, Anchor Base	3,118.28	617.38
		For >10 To 20, Deduct	*-106.21*	
		For >20 To 40, Deduct	*-193.58*	
		For >40, Deduct	*-406.00*	

26 56 13 00-0548 Round Tapered, Fiberglass Area Light Poles, Direct Burial *(26 56 13 00-0511)*

26 56 13 00-0549	EA	10' High, 3.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	776.66	162.46
		For >10 To 20, Deduct	*-26.19*	
		For >20 To 40, Deduct	*-47.87*	
		For >40, Deduct	*-100.25*	
26 56 13 00-0550	EA	12' High, 3.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	834.70	178.72
		For >10 To 20, Deduct	*-28.03*	
		For >20 To 40, Deduct	*-51.28*	
		For >40, Deduct	*-107.33*	
26 56 13 00-0551	EA	14' High, 3.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	891.39	194.96
		For >10 To 20, Deduct	*-29.81*	
		For >20 To 40, Deduct	*-54.60*	
		For >40, Deduct	*-114.21*	
26 56 13 00-0552	EA	16' High, 3.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	914.24	194.96
		For >10 To 20, Deduct	*-30.72*	
		For >20 To 40, Deduct	*-56.20*	
		For >40, Deduct	*-117.64*	
26 56 13 00-0553	EA	18' High, 3.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	984.38	211.21
		For >10 To 20, Deduct	*-33.04*	
		For >20 To 40, Deduct	*-60.46*	
		For >40, Deduct	*-126.54*	
26 56 13 00-0554	EA	20' High, 3.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	1,043.76	227.46
		For >10 To 20, Deduct	*-34.93*	
		For >20 To 40, Deduct	*-63.97*	
		For >40, Deduct	*-133.82*	
26 56 13 00-0555	EA	22' High, 3.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	1,107.19	243.70
		For >10 To 20, Deduct	*-36.98*	
		For >20 To 40, Deduct	*-67.76*	
		For >40, Deduct	*-141.71*	
26 56 13 00-0556	EA	24' High, 3.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	1,177.32	259.95
		For >10 To 20, Deduct	*-39.29*	
		For >20 To 40, Deduct	*-72.01*	
		For >40, Deduct	*-150.60*	
26 56 13 00-0557	EA	26' High, 3.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	1,306.39	259.95
		For >10 To 20, Deduct	*-44.46*	
		For >20 To 40, Deduct	*-81.05*	
		For >40, Deduct	*-169.96*	
26 56 13 00-0558	EA	28' High, 3.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	1,467.94	276.20
		For >10 To 20, Deduct	*-50.43*	
		For >20 To 40, Deduct	*-91.71*	
		For >40, Deduct	*-192.57*	
26 56 13 00-0559	EA	30' High, 3.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	1,629.49	292.44
		For >10 To 20, Deduct	*-56.41*	
		For >20 To 40, Deduct	*-102.37*	
		For >40, Deduct	*-215.18*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0560	EA	10' High, 4.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	900.34	162.46
		For >10 To 20, Deduct	*-31.14*	
		For >20 To 40, Deduct	*-56.53*	
		For >40, Deduct	*-118.80*	
26 56 13 00-0561	EA	12' High, 4.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	965.11	178.72
		For >10 To 20, Deduct	*-33.24*	
		For >20 To 40, Deduct	*-60.41*	
		For >40, Deduct	*-126.90*	
26 56 13 00-0562	EA	14' High, 4.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	1,029.86	194.96
		For >10 To 20, Deduct	*-35.35*	
		For >20 To 40, Deduct	*-64.29*	
		For >40, Deduct	*-134.98*	
26 56 13 00-0563	EA	16' High, 4.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	1,063.47	194.96
		For >10 To 20, Deduct	*-36.69*	
		For >20 To 40, Deduct	*-66.64*	
		For >40, Deduct	*-140.02*	
26 56 13 00-0564	EA	18' High, 4.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	1,128.23	211.21
		For >10 To 20, Deduct	*-38.79*	
		For >20 To 40, Deduct	*-70.53*	
		For >40, Deduct	*-148.11*	
26 56 13 00-0565	EA	20' High, 4.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	1,192.99	227.46
		For >10 To 20, Deduct	*-40.90*	
		For >20 To 40, Deduct	*-74.41*	
		For >40, Deduct	*-156.20*	
26 56 13 00-0566	EA	22' High, 4.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	1,257.76	243.70
		For >10 To 20, Deduct	*-43.00*	
		For >20 To 40, Deduct	*-78.30*	
		For >40, Deduct	*-164.29*	
26 56 13 00-0567	EA	24' High, 4.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	1,353.44	259.95
		For >10 To 20, Deduct	*-46.34*	
		For >20 To 40, Deduct	*-84.34*	
		For >40, Deduct	*-177.02*	
26 56 13 00-0568	EA	26' High, 4.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	1,478.47	259.95
		For >10 To 20, Deduct	*-51.34*	
		For >20 To 40, Deduct	*-93.09*	
		For >40, Deduct	*-195.78*	
26 56 13 00-0569	EA	28' High, 4.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	1,637.34	276.20
		For >10 To 20, Deduct	*-57.21*	
		For >20 To 40, Deduct	*-103.57*	
		For >40, Deduct	*-217.98*	
26 56 13 00-0570	EA	30' High, 4.5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	1,794.86	292.44
		For >10 To 20, Deduct	*-63.02*	
		For >20 To 40, Deduct	*-113.94*	
		For >40, Deduct	*-239.99*	
26 56 13 00-0571	EA	10' High, 5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	1,009.24	162.46
		For >10 To 20, Deduct	*-35.50*	
		For >20 To 40, Deduct	*-64.15*	
		For >40, Deduct	*-135.14*	
26 56 13 00-0572	EA	12' High, 5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	1,065.94	178.72
		For >10 To 20, Deduct	*-37.28*	
		For >20 To 40, Deduct	*-67.47*	
		For >40, Deduct	*-142.02*	
26 56 13 00-0573	EA	14' High, 5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	1,121.28	194.96
		For >10 To 20, Deduct	*-39.00*	
		For >20 To 40, Deduct	*-70.69*	
		For >40, Deduct	*-148.70*	
26 56 13 00-0574	EA	16' High, 5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	1,144.14	194.96
		For >10 To 20, Deduct	*-39.92*	
		For >20 To 40, Deduct	*-72.29*	
		For >40, Deduct	*-152.13*	
26 56 13 00-0575	EA	18' High, 5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	1,199.48	211.21
		For >10 To 20, Deduct	*-41.64*	
		For >20 To 40, Deduct	*-75.52*	
		For >40, Deduct	*-158.80*	
26 56 13 00-0576	EA	20' High, 5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	1,256.17	227.46
		For >10 To 20, Deduct	*-43.42*	
		For >20 To 40, Deduct	*-78.83*	
		For >40, Deduct	*-165.68*	
26 56 13 00-0577	EA	22' High, 5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	1,358.59	243.70
		For >10 To 20, Deduct	*-47.03*	
		For >20 To 40, Deduct	*-85.35*	
		For >40, Deduct	*-179.42*	
26 56 13 00-0578	EA	24' High, 5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	1,477.13	259.95
		For >10 To 20, Deduct	*-51.29*	
		For >20 To 40, Deduct	*-93.00*	
		For >40, Deduct	*-195.57*	
26 56 13 00-0579	EA	26' High, 5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	1,555.10	259.95
		For >10 To 20, Deduct	*-54.41*	
		For >20 To 40, Deduct	*-98.46*	
		For >40, Deduct	*-207.27*	
26 56 13 00-0580	EA	28' High, 5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	1,666.91	276.20
		For >10 To 20, Deduct	*-58.39*	
		For >20 To 40, Deduct	*-105.64*	
		For >40, Deduct	*-222.42*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0581	EA	30' High, 5" Top OD, Round Tapered, Fiberglass Area Light Pole, Direct Burial	1,778.72	292.44
		For >10 To 20, Deduct	*-62.38*	
		For >20 To 40, Deduct	*-112.81*	
		For >40, Deduct	*-237.56*	
26 56 13 00-0582		**Factory Accessories For Fiberglass Area Light Poles** *(26 56 13 00-0510)*		
26 56 13 00-0583	EA	Open Or Capped Top For Fiberglass Area Light Poles	47.67	
26 56 13 00-0584	EA	Factory Side Drilling Up To Four Fixtures On Fiberglass Area Light Poles	47.67	
26 56 13 00-0585	EA	Smooth Shaft Finish For Fiberglass Area Light Poles	90.44	
26 56 13 00-0586	EA	Vibration Dampener For Fiberglass Area Light Poles	119.78	
26 56 13 00-0587		**Concrete Area Light Poles** *(26 56 13 00-0177)*		
26 56 13 00-0588		**Octagonal Tapered, Spun Concrete Area Light Poles, Anchor Base** *(26 56 13 00-0587)*		
26 56 13 00-0589	EA	28' High, Octagonal Tapered, Spun Concrete Area Light Pole, Anchor Base	2,237.18	552.39
26 56 13 00-0590	EA	30' High, Octagonal Tapered, Spun Concrete Area Light Pole, Anchor Base	2,358.81	584.88
26 56 13 00-0591	EA	33' High, Octagonal Tapered, Spun Concrete Area Light Pole, Anchor Base	2,446.60	601.13
26 56 13 00-0592	EA	36' High, Octagonal Tapered, Spun Concrete Area Light Pole, Anchor Base	3,037.13	617.38
26 56 13 00-0593	EA	38' High, Octagonal Tapered, Spun Concrete Area Light Pole, Anchor Base	3,372.47	649.87
26 56 13 00-0594	EA	43' High, Octagonal Tapered, Spun Concrete Area Light Pole, Anchor Base	4,175.73	844.83
26 56 13 00-0595	EA	47' High, Octagonal Tapered, Spun Concrete Area Light Pole, Anchor Base	5,003.56	1,039.79
26 56 13 00-0596	EA	27' High, Octagonal Tapered, Spun Concrete Area Light Pole, Anchor Base Note: Polished brown with acrylic coating finish.	4,833.07	552.39
26 56 13 00-0597	EA	30' High, Octagonal Tapered, Spun Concrete Area Light Pole, Anchor Base Note: Polished brown with acrylic coating finish.	5,575.96	584.88
26 56 13 00-0598	EA	Pole Adapter Base Plate, Galvanized Steel, 1" Thick For Adapting Up To 40'	699.44	194.96
26 56 13 00-0599	EA	13' High Concrete Octagonal Area Light Pole, Pink With Acrylic Coating, Finish Design	2,896.34	389.80
26 56 13 00-0600	EA	Pole Base Cover For All Octagon Poles	270.40	79.54
26 56 13 00-0601	EA	Pole Arms 24" Long, Square, 250 Watt Fixture, Dark, Architectural Bronze	555.77	159.09
26 56 13 00-0602		**Tapered, Spun Concrete Area Light Poles, Direct Burial** *(26 56 13 00-0587)* Note: Round or square.		
26 56 13 00-0603	EA	13' High, Tapered, Spun Concrete Area Light Pole, Direct Burial	2,390.51	259.95
26 56 13 00-0604	EA	16' High, Tapered, Spun Concrete Area Light Pole, Direct Burial	2,702.41	324.93
26 56 13 00-0605	EA	18' High, Tapered, Spun Concrete Area Light Pole, Direct Burial	2,985.26	389.92
26 56 13 00-0606	EA	30' High, Tapered, Spun Concrete Area Light Pole, Direct Burial	4,161.17	584.88
26 56 13 00-0607	EA	35' High, Tapered, Spun Concrete Area Light Pole, Direct Burial	4,796.27	617.38
26 56 13 00-0608	EA	40' High, Tapered, Spun Concrete Area Light Pole, Direct Burial	5,482.91	649.87
26 56 13 00-0609	EA	45' High, Tapered, Spun Concrete Area Light Pole, Direct Burial	6,359.48	844.83
26 56 13 00-0610		**Round Tapered, Spun Concrete Area Light Poles, Direct Burial** *(26 56 13 00-0587)*		
26 56 13 00-0611	EA	60' High, Round Tapered, Spun Concrete Area Light Pole, Direct Burial (Lithonia SPRTC C2 60 9-22)	19,369.31	1,462.21
26 56 13 00-0612	EA	70' High, Round Tapered, Spun Concrete Area Light Pole, Direct Burial (Lithonia SPRTC C2 70 9-24)	23,097.41	1,798.06
26 56 13 00-0613	EA	80' High, Round Tapered, Spun Concrete Area Light Pole, Direct Burial (Lithonia SPRTC C1 80 9-26)	27,379.73	2,428.96
26 56 13 00-0614		**Treated Wood Area Light Poles** *(26 56 13 00-0177)* See CSI section 26 05 46 00-0001 for wood poles.		
26 56 13 00-0615		**Cast Iron Decorative Light Posts** *(26 56 13 00-0177)*		
26 56 13 00-0616		**Round Tapered, Cast Iron Decorative Light Post, Anchor Base** *(26 56 13 00-0615)* Note: As manufactured by Hadco and King Luminaries or an approved equal.		
26 56 13 00-0617	EA	10' High, Round Tapered, Cast Iron Decorative Light Post, Anchor Base	1,403.99	162.46
26 56 13 00-0618	EA	12' High, Round Tapered, Cast Iron Decorative Light Post, Anchor Base	1,482.04	187.16
26 56 13 00-0619	EA	14' High, Round Tapered, Cast Iron Decorative Light Post, Anchor Base	1,606.42	194.96
26 56 13 00-0620	EA	16' High, Round Tapered, Cast Iron Decorative Light Post, Anchor Base	1,972.65	227.46
26 56 13 00-0621	EA	18' High, Round Tapered, Cast Iron Decorative Light Post, Anchor Base	2,302.32	246.95
26 56 13 00-0622	EA	20' High, Round Tapered, Cast Iron Decorative Light Post, Anchor Base	2,647.86	266.45
26 56 13 00-0623		**Landscape Light Poles** *(26 56 13 00-0001)* Note: Excludes lighting fixtures.		
26 56 13 00-0624		**Aluminum Landscape Light Poles** *(26 56 13 00-0623)* Note: Includes painted finish.		
26 56 13 00-0625		**Round Straight, Aluminum Landscape Light Poles** *(26 56 13 00-0624)*		
26 56 13 00-0626		**Round Straight, Aluminum Landscape Light Poles, Anchor Base** *(26 56 13 00-0625)*		
26 56 13 00-0627	EA	7' High, 3" OD, Round Straight, Aluminum Landscape Light Pole, Anchor Base	483.50	194.96
26 56 13 00-0628	EA	12' High, 3" OD, Round Straight, Aluminum Landscape Light Pole, Anchor Base	816.07	259.95
26 56 13 00-0629		**Round Straight, Aluminum Landscape Light Poles, Direct Burial** *(26 56 13 00-0625)*		
26 56 13 00-0630	EA	7' High, 3" OD, Round Straight, Aluminum Landscape Light Pole, Direct Burial	439.46	194.96
26 56 13 00-0631	EA	12' High, 3" OD, Round Straight, Aluminum Landscape Light Pole, Direct Burial	772.03	259.95

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0632		Steel Landscape Light Poles *(26 56 13 00-0623)* Note: Includes painted finish.		
26 56 13 00-0633		Round Straight, Steel Landscape Light Poles *(26 56 13 00-0632)*		
26 56 13 00-0634		Round Straight, Steel Landscape Light Poles, Anchor Base *(26 56 13 00-0633)*		
26 56 13 00-0635	EA	6'-8" High, 3" OD, Round Straight, Steel Landscape Light Pole, Anchor Base	536.10	194.96
26 56 13 00-0636		Round Straight, Steel Landscape Light Poles, Direct Burial *(26 56 13 00-0633)*		
26 56 13 00-0637	EA	6'-8" High, 3" OD, Round Straight, Steel Landscape Light Pole, Direct Burial	503.35	194.96
26 56 13 00-0638		Light Pole Brackets And Arms *(26 56 13 00-0001)*		
26 56 13 00-0639		Light Pole Brackets *(26 56 13 00-0638)*		
26 56 13 00-0640		Bullhorn Style, Pole Top Area Light Brackets *(26 56 13 00-0639)*		
26 56 13 00-0641		Round Bullhorn Style, Pole Top Area Light Brackets *(26 56 13 00-0640)*		
26 56 13 00-0642		Steel, Round Bullhorn Style, Pole Top Area Light Brackets *(26 56 13 00-0641)* Note: Includes powdercoat finish.		
26 56 13 00-0643	EA	Two Tenons At 180 Degrees, Steel, Round Bullhorn Style, Pole Top Area Light Bracket	664.21	38.99
		For Galvanized Finish, Add	*58.62*	
26 56 13 00-0644	EA	Three Tenons At 180 Degrees, Steel, Round Bullhorn Style, Pole Top Area Light Bracket	841.08	38.99
		For Galvanized Finish, Add	*76.31*	
26 56 13 00-0645	EA	Three Tenons At 120 Degrees, Steel, Round Bullhorn Style, Pole Top Area Light Bracket	895.07	38.99
		For Galvanized Finish, Add	*81.71*	
26 56 13 00-0646	EA	Four Tenons At 90 Degrees, Steel, Round Bullhorn Style, Pole Top Area Light Bracket	1,228.33	38.99
		For Galvanized Finish, Add	*115.04*	
26 56 13 00-0647	EA	Four Tenons At 180 Degrees, Steel, Round Bullhorn Style, Pole Top Area Light Bracket	1,280.23	38.99
		For Galvanized Finish, Add	*120.23*	
26 56 13 00-0648		Aluminum, Round Bullhorn Style, Pole Top Area Light Brackets *(26 56 13 00-0641)* Note: Includes satin brushed or painted finish.		
26 56 13 00-0649	EA	Two Tenons At 180 Degrees, Aluminum, Round Bullhorn Style, Pole Top Area Light Bracket	249.39	38.99
		For Bronze Or Satin Anodized Finish, Add	*17.14*	
		For Black Anodized Finish, Add	*34.28*	
26 56 13 00-0650	EA	Three Tenons At 120 Degrees, Aluminum, Round Bullhorn Style, Pole Top Area Light Bracket	304.07	38.99
		For Bronze Or Satin Anodized Finish, Add	*22.61*	
		For Black Anodized Finish, Add	*45.22*	
26 56 13 00-0651	EA	Three Tenons At 180 Degrees, Aluminum, Round Bullhorn Style, Pole Top Area Light Bracket	318.80	38.99
		For Bronze Or Satin Anodized Finish, Add	*24.08*	
		For Black Anodized Finish, Add	*48.16*	
26 56 13 00-0652	EA	Four Tenons At 90 Degrees, Aluminum, Round Bullhorn Style, Pole Top Area Light Bracket	370.32	38.99
		For Bronze Or Satin Anodized Finish, Add	*29.23*	
		For Black Anodized Finish, Add	*58.47*	
26 56 13 00-0653	EA	Four Tenons At 180 Degrees, Aluminum, Round Bullhorn Style, Pole Top Area Light Bracket	380.84	38.99
		For Bronze Or Satin Anodized Finish, Add	*30.29*	
		For Black Anodized Finish, Add	*60.57*	
26 56 13 00-0654		Square Bullhorn Style, Pole Top Area Light Brackets *(26 56 13 00-0640)*		
26 56 13 00-0655		Steel, Square Bullhorn Style, Pole Top Area Light Brackets *(26 56 13 00-0654)* Note: Includes powdercoat finish.		
26 56 13 00-0656	EA	Two Tenons At 180 Degrees, Steel, Square Bullhorn Style, Pole Top Area Light Bracket	714.71	38.99
		For Galvanized Finish, Add	*63.67*	
26 56 13 00-0657	EA	Three Tenons At 180 Degrees, Steel, Square Bullhorn Style, Pole Top Area Light Bracket	884.13	38.99
		For Galvanized Finish, Add	*80.62*	
26 56 13 00-0658	EA	Four Tenons At 180 Degrees, Steel, Square Bullhorn Style, Pole Top Area Light Bracket	1,083.11	38.99
		For Galvanized Finish, Add	*100.51*	
26 56 13 00-0659	EA	Four Tenons At 90 Degrees, Steel, Square Bullhorn Style, Pole Top Area Light Bracket	1,283.02	38.99
		For Galvanized Finish, Add	*120.50*	
26 56 13 00-0660		Wood Pole Clamp On Style, Pole Top Area Light Brackets *(26 56 13 00-0639)*		
26 56 13 00-0661		Steel, Wood Pole Clamp On Style, Pole Top Area Light Brackets *(26 56 13 00-0660)* Note: Includes powdercoat finish.		
26 56 13 00-0662	EA	One Tenon, Steel, Wood Pole Clamp On Style, Pole Top Area Light Bracket	672.21	64.98
26 56 13 00-0663	EA	Two Tenons At 90, 120 Or 180 Degrees, Steel, Wood Pole Clamp On Style, Pole Top Area Light Bracket	1,018.97	64.98
26 56 13 00-0664	EA	Three Tenons At 120 Degrees, Steel, Wood Pole Clamp On Style, Pole Top Area Light Bracket	1,429.26	64.98
26 56 13 00-0665	EA	Four Tenons At 90 Degrees, Steel, Wood Pole Clamp On Style, Pole Top Area Light Bracket	1,564.24	64.98
26 56 13 00-0666		Light Pole Arms *(26 56 13 00-0638)*		
26 56 13 00-0667		Wood Pole Streetlight Arms *(26 56 13 00-0666)*		
26 56 13 00-0668		Steel, Wood Pole Streetlight Arms *(26 56 13 00-0667)*		
26 56 13 00-0669	EA	1-1/4" Arm Diameter, 2-1/2' Arm Length, Galvanized Steel, Wood Pole Streetlight Arm, Bolt Mount	387.39	58.49
26 56 13 00-0670	EA	1-1/4" Arm Diameter, 3-1/2' Arm Length, Galvanized Steel, Wood Pole Streetlight Arm, Bolt Mount	409.47	64.98

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0671	EA	1-1/4" Arm Diameter, 5-1/2' Arm Length, Galvanized Steel, Wood Pole Streetlight Arm, Bolt Mount	473.84	81.23
26 56 13 00-0672	EA	2" Arm Diameter, 3-1/2' Arm Length, Galvanized Steel, Wood Pole Streetlight Arm, Bolt Mount	575.63	64.98
26 56 13 00-0673	EA	2" Arm Diameter, 5-1/2' Arm Length, Galvanized Steel, Wood Pole Streetlight Arm, Bolt Mount	639.54	81.23
26 56 13 00-0674	EA	2" Arm Diameter, 7-1/2' Arm Length, Galvanized Steel, Wood Pole Streetlight Arm, Bolt Mount	776.53	97.48
26 56 13 00-0675		**Aluminum, Wood Pole Streetlight Arms** *(26 56 13 00-0667)*		
26 56 13 00-0676	EA	1-1/4" Arm Diameter, 42" Arm Length, Aluminum Arm, Wood Pole Streetlight Arm, Bolt Mount	247.72	64.98
26 56 13 00-0677	EA	2" Arm Diameter, 42" Arm Length, Aluminum Arm, Wood Pole Streetlight Arm, Bolt Mount	308.12	64.98
26 56 13 00-0678	EA	2" Arm Diameter, 66" Arm Length, Aluminum Arm, Wood Pole Streetlight Arm, Bolt Mount	412.35	81.23
26 56 13 00-0679	EA	2" Arm Diameter, 90" Arm Length, Aluminum Arm, Wood Pole Streetlight Arm, Bolt Mount	541.63	97.48
26 56 13 00-0680		**Area Light Arms** *(26 56 13 00-0666)*		
26 56 13 00-0681		**Steel Area Light Arms** *(26 56 13 00-0680)*		
26 56 13 00-0682	EA	Single, 2.38" Arm Diameter, 4' Arm Length, Upsweep Style, Steel Area Light Arm, Hub Mount	748.22	64.98
26 56 13 00-0683	EA	Two, 2.38" Arm Diameter, 4' Arm Length, Upsweep Style, Steel Area Light Arms, Hub Mount	1,179.03	71.48
26 56 13 00-0684	EA	Three, 2.38" Arm Diameter, 4' Arm Length, Upsweep Style, Steel Area Light Arms, Hub Mount	1,310.35	77.98
26 56 13 00-0685	EA	Four, 2.38" Arm Diameter, 4' Arm Length, Upsweep Style, Steel Area Light Arms, Hub Mount	1,557.62	84.48
26 56 13 00-0686	EA	Single, 2.38" Arm Diameter, 6' Arm Length, Upsweep Style, Steel Area Light Arm, Hub Mount	891.81	81.23
26 56 13 00-0687	EA	Two, 2.38" Arm Diameter, 6' Arm Length, Upsweep Style, Steel Area Light Arms, Hub Mount	1,279.15	87.73
26 56 13 00-0688		**Aluminum Area Light Arms** *(26 56 13 00-0680)*		
26 56 13 00-0689	EA	Single, 4' Arm Length, Mast Style, Aluminum Area Light Arm, Bolt Mount	301.38	64.98
26 56 13 00-0690	EA	Single, 6' Arm Length, Mast Style, Aluminum Area Light Arm, Bolt Mount	371.73	81.23
26 56 13 00-0691	EA	Single, 8' Arm Length, Mast Style, Aluminum Area Light Arm, Bolt Mount	444.19	97.48
26 56 13 00-0692	EA	Single, 4' Arm Length, Mast Style, Aluminum Area Light Arm, Hub Mount	299.28	64.98
26 56 13 00-0693	EA	Two, 4' Arm Length, Mast Style, Aluminum Area Light Arms, Hub Mount	425.85	71.48
26 56 13 00-0694	EA	Single, 6' Arm Length, Mast Style, Aluminum Area Light Arm, Hub Mount	367.52	81.23
26 56 13 00-0695	EA	Two, 6' Arm Length, Mast Style, Aluminum Area Light Arms, Hub Mount	519.34	87.73
26 56 13 00-0696	EA	Single, 8' Arm Length, Mast Style, Aluminum Area Light Arm, Hub Mount	446.29	97.48
26 56 13 00-0697	EA	Two, 8' Arm Length, Mast Style, Aluminum Area Light Arms, Hub Mount	630.70	103.98
26 56 13 00-0698		**Removal And Reinstallation Of Lighting Pole** *(26 56 13 00-0001)*		
26 56 13 00-0699	EA	Removal And Relocation Of Up To 45' Lighting Pole And Standards With One Or Two Arms	2,144.78	
26 56 13 00-0700		**High Mast Lighting** *(26 56 13 00-0001)*		
26 56 13 00-0701		**High Mast Lighting Assemblies** *(26 56 13 00-0700)*		
		Note: Includes non-latching system, ring assembly with internal bumper, acrylic top cover, pulley supports, cast arm filter for pipe tension, transition assembly, standard head frame assembly, standard hoist, and powder coated pole. See CSI section 26 56 21 00-0001 for high mast fixtures.		
26 56 13 00-0702	EA	60' High Mast Lighting Assembly	59,991.50	1,995.92
26 56 13 00-0703	EA	70' High Mast Lighting Assembly	63,373.99	2,090.42
26 56 13 00-0704	EA	80' High Mast Lighting Assembly	66,784.55	2,226.95
26 56 13 00-0705	EA	90' High Mast Lighting Assembly	70,221.11	2,405.50
26 56 13 00-0706	EA	100' High Mast Lighting Assembly	73,669.98	2,625.97
26 56 13 00-0707	EA	110' High Mast Lighting Assembly	78,107.55	2,888.76
26 56 13 00-0708	EA	120' High Mast Lighting Assembly	81,682.66	3,151.34
26 56 13 00-0709	EA	130' High Mast Lighting Assembly	84,979.66	3,413.93
26 56 13 00-0710	EA	140' High Mast Lighting Assembly	88,554.77	3,676.63
26 56 13 00-0711	EA	150' High Mast Lighting Assembly	92,916.83	3,939.22
26 56 13 00-0712		**High Mast Light Poles** *(26 56 13 00-0700)*		
26 56 13 00-0713	EA	60' High Mast Light Poles	22,611.12	1,198.71
26 56 13 00-0714	EA	70' High Mast Light Poles	25,965.22	1,255.49
26 56 13 00-0715	EA	80' High Mast Light Poles	29,334.77	1,337.50
26 56 13 00-0716	EA	90' High Mast Light Poles	32,717.71	1,444.76
26 56 13 00-0717	EA	100' High Mast Light Poles	36,116.09	1,577.25
26 56 13 00-0718	EA	110' High Mast Light Poles	39,529.94	1,734.97
26 56 13 00-0719	EA	120' High Mast Light Poles	42,099.14	1,892.70
26 56 13 00-0720	EA	130' High Mast Light Poles	42,337.75	3,507.80
26 56 13 00-0721	EA	140' High Mast Light Poles	46,957.36	2,208.15
26 56 13 00-0722	EA	150' High Mast Light Poles	49,806.73	2,365.87
26 56 13 00-0723		**High Mast Lighting Accessories** *(26 56 13 00-0700)*		
		See CSI section 26 55 13 00-0120 for lighting fixtures, 26 56 21 00-0001 for light fixtures.		
26 56 13 00-0724	EA	Bottom Latching System For High Mast Lighting	1,047.48	
26 56 13 00-0725	EA	Top Latching System For High Mast Lighting	2,983.92	
26 56 13 00-0726	EA	Centering Springs For High Mast Lighting	2,260.08	
26 56 13 00-0727	EA	Electric Power Cord For High Mast Lighting	945.00	
26 56 13 00-0728	EA	Aircraft Warning Lights For High Mast Lighting	1,752.05	
26 56 13 00-0729	EA	Internal Motorized Hoist For High Mast Lighting	19,487.41	
26 56 13 00-0730	EA	Portable Hoist Motor With Step Down Transformer For High Mast Lighting	19,586.85	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 13 00-0731		Concrete Bases *(26 56 13 00-0001)*		
26 56 13 00-0732		Concrete Bases, Cast In Place *(26 56 13 00-0731)* Note: Includes excavation/drilling, concrete, reinforcement, forms for exposed base, anchors/supports and backfill. Excludes conduit.		
26 56 13 00-0733	EA	Minimum Charge For Cast In Place Concrete Base For Poles Note: For projects where the cast in place concrete base for poles charge is less than the minimum charge, use this task exclusively. This task should not be used in conjunction with any other tasks in this section.	595.61	
26 56 13 00-0734	VLF	1-1/2' Diameter Concrete Base For Poles	69.52	
26 56 13 00-0735	VLF	2' Diameter Concrete Base For Poles	96.60	
26 56 13 00-0736	VLF	2-1/2' Diameter Concrete Base For Poles	129.58	
26 56 13 00-0737	VLF	3' Diameter Concrete Base For Poles	169.64	
26 56 13 00-0738	VLF	3-1/2' Diameter Concrete Base For Poles	226.56	
26 56 13 00-0739	VLF	4' Diameter Concrete Base For Poles	284.60	
26 56 13 00-0740	VLF	5' Diameter Concrete Base For Poles	412.51	
26 56 13 00-0741	VLF	6' Diameter Concrete Base For Poles	566.75	

26 56 18 Incandescent Exterior Lighting *(26 56)*

26 56 18 00-0001		Exterior Globe *(26 56 18)*		
26 56 18 00-0002		Incandescent, Exterior Globe *(26 56 18 00-0001)*		
26 56 18 00-0003	EA	100 Watt Incandescent, Enclosed And Gasketed, Exterior Wall Fixture	56.84	20.61
26 56 18 00-0004	EA	150 To 200 Watt Incandescent, Enclosed And Gasketed, Exterior Wall Fixture	88.20	20.61
26 56 18 00-0005	EA	100 Watt Incandescent, Enclosed And Gasketed With Guard, Exterior Wall Fixture	66.89	20.61
26 56 18 00-0006	EA	150 To 200 Watt Incandescent, Enclosed And Gasketed With Guard, Exterior Wall Fixture	92.07	20.61
26 56 18 00-0007		Compact Fluorescent And Incandescent, Vandal Resistant, Surface Mounted, Rectangular Exterior Area Fixtures *(26 56 18)* Note: Includes cast aluminum powder coated housing, polycarbonate lens and tamperproof screws.		
26 56 18 00-0008	EA	7 Watt Fluorescent, Vandal Resistant, Surface Mounted, Rectangular Exterior Area Fixture	254.46	82.45
26 56 18 00-0009	EA	9 Watt Fluorescent, Vandal Resistant, Surface Mounted, Rectangular Exterior Area Fixture	264.81	87.59
26 56 18 00-0010	EA	13 Or 14 Watt Fluorescent, Vandal Resistant, Surface Mounted, Rectangular Exterior Area Fixture	292.64	92.74
26 56 18 00-0011	EA	75 Watt Incandescent, Vandal Resistant, Surface Mounted, Rectangular Exterior Area Fixture	283.17	103.05
26 56 18 00-0012	EA	100 Watt Incandescent, Vandal Resistant, Surface Mounted, Rectangular Exterior Area Fixture	317.34	118.51

26 56 19 LED Exterior Lighting *(26 56)*

26 56 19 00-0001		LED, Wall Packs *(26 56 19)*		
26 56 19 00-0002		Full Cutoff, LED Wall Packs *(26 56 19 00-0001)*		
26 56 19 00-0003		Full Cutoff, LED Wall Packs (Lithonia) *(26 56 19 00-0002)*		
26 56 19 00-0004	EA	30 LEDs, 57 Watt, 530 mA Drive Current, Full Cutoff, LED Wall Pack (Lithonia CSXW LED)	1,095.23	112.90
		For >50 To 100, Deduct	*-54.76*	
		For >100 To 250, Deduct	*-82.14*	
		For >250 To 500, Deduct	*-131.26*	
		For >500 To 1,000, Deduct	*-180.37*	
		For >1,000, Deduct	*-229.49*	
26 56 19 00-0005	EA	30 LEDs, 35 Watt, 350 mA Drive Current, Full Cutoff, LED Wall Pack (Lithonia CSXW LED)	1,189.60	112.90
		For >50 To 100, Deduct	*-59.48*	
		For >100 To 250, Deduct	*-89.22*	
		For >250 To 500, Deduct	*-143.05*	
		For >500 To 1,000, Deduct	*-196.89*	
		For >1,000, Deduct	*-250.72*	
26 56 19 00-0006		Full Cutoff, LED Wall Packs (CREE® BetaLED®) *(26 56 19 00-0002)*		
26 56 19 00-0007		Wall Mount, Full Cutoff, LED Wall Packs (CREE® BetaLED® Edge® SEC-EDG) *(26 56 19 00-0006)* Note: UL wet listed. Includes 4,000K or 5,700K color temperature, 120-277 voltage, 350mA driver, die-cast extruded aluminum housing assembly and white, black, silver or bronze powder coat finish. Excludes sensors.		
26 56 19 00-0008	EA	20 LEDs, 26 Watt, Wall Mount, Full Cutoff, LED Wall Pack (CREE® BetaLED® Edge® SEC-EDG) Note: Includes 350mA or 525mA driver.	890.38	109.68
		For 3 Or 7-Pin NEMA Photocell Receptacle, Add	*18.52*	
		For Bird Spikes, Add	*45.98*	
		For Fuse, Add	*55.57*	
		For 0 To 10 Volt Dimming, Add	*55.57*	
		For 480 Volt, Add	*83.36*	
		For Multi-Level, Add	*120.40*	
		For >50 To 100, Deduct	*-44.52*	
		For >100 To 250, Deduct	*-66.78*	
		For >250 To 500, Deduct	*-105.81*	
		For >500 To 1,000, Deduct	*-144.85*	
		For >1,000, Deduct	*-183.88*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 19 00-0009	EA	40 LEDs, 47 Watt, Wall Mount, Full Cutoff, LED Wall Pack (CREE® BetaLED® Edge® SEC-EDG) Note: Includes 350mA or 525mA driver.	1,146.41	116.13
		For 3 Or 7-Pin NEMA Photocell Receptacle, Add	*18.52*	
		For Bird Spikes, Add	*46.62*	
		For Fuse, Add	*55.57*	
		For 0 To 10 Volt Dimming, Add	*55.57*	
		For 480 Volt, Add	*83.36*	
		For Multi-Level, Add	*120.40*	
		For >50 To 100, Deduct	*-57.32*	
		For >100 To 250, Deduct	*-85.98*	
		For >250 To 500, Deduct	*-137.49*	
		For >500 To 1,000, Deduct	*-189.01*	
		For >1,000, Deduct	*-240.52*	
26 56 19 00-0010	EA	60 LEDs, 68 Watt, Wall Mount, Full Cutoff, LED Wall Pack (CREE® BetaLED® Edge® SEC-EDG) Note: Includes 350mA or 525mA driver.	1,284.90	122.58
		For 3 Or 7-Pin NEMA Photocell Receptacle, Add	*18.52*	
		For Bird Spikes, Add	*47.27*	
		For Fuse, Add	*55.57*	
		For 0 To 10 Volt Dimming, Add	*55.57*	
		For 480 Volt, Add	*83.36*	
		For Multi-Level, Add	*120.40*	
		For >50 To 100, Deduct	*-64.25*	
		For >100 To 250, Deduct	*-96.37*	
		For >250 To 500, Deduct	*-154.48*	
		For >500 To 1,000, Deduct	*-212.60*	
		For >1,000, Deduct	*-270.71*	
26 56 19 00-0011	EA	80 LEDs, 90 Watt, Wall Mount, Full Cutoff, LED Wall Pack (CREE® BetaLED® Edge® SEC-EDG) Note: Includes 350mA or 525mA driver.	1,658.47	129.04
		For 3 Or 7-Pin NEMA Photocell Receptacle, Add	*18.52*	
		For Bird Spikes, Add	*47.91*	
		For Fuse, Add	*55.57*	
		For 0 To 10 Volt Dimming, Add	*55.57*	
		For 480 Volt, Add	*83.36*	
		For Multi-Level, Add	*120.40*	
		For >50 To 100, Deduct	*-82.92*	
		For >100 To 250, Deduct	*-124.39*	
		For >250 To 500, Deduct	*-200.86*	
		For >500 To 1,000, Deduct	*-277.33*	
		For >1,000, Deduct	*-353.80*	
26 56 19 00-0012	EA	100 LEDs, 111 Watt, Wall Mount, Full Cutoff, LED Wall Pack (CREE® BetaLED® Edge® SEC-EDG)	1,914.51	135.48
		For 3 Or 7-Pin NEMA Photocell Receptacle, Add	*18.52*	
		For Bird Spikes, Add	*48.56*	
		For Fuse, Add	*55.57*	
		For 0 To 10 Volt Dimming, Add	*55.57*	
		For 480 Volt, Add	*83.36*	
		For Multi-Level, Add	*120.40*	
		For >50 To 100, Deduct	*-95.73*	
		For >100 To 250, Deduct	*-143.59*	
		For >250 To 500, Deduct	*-232.54*	
		For >500 To 1,000, Deduct	*-321.49*	
		For >1,000, Deduct	*-410.44*	
26 56 19 00-0013	EA	120 LEDs, 132 Watt, Wall Mount, Full Cutoff, LED Wall Pack (CREE® BetaLED® Edge® SEC-EDG)	2,170.54	141.94
		For 3 Or 7-Pin NEMA Photocell Receptacle, Add	*18.52*	
		For Bird Spikes, Add	*49.20*	
		For Fuse, Add	*55.57*	
		For 0 To 10 Volt Dimming, Add	*55.57*	
		For 480 Volt, Add	*83.36*	
		For Multi-Level, Add	*120.40*	
		For >50 To 100, Deduct	*-108.53*	
		For >100 To 250, Deduct	*-162.79*	
		For >250 To 500, Deduct	*-264.22*	
		For >500 To 1,000, Deduct	*-365.65*	
		For >1,000, Deduct	*-467.08*	

26 56 19 00-0014 Wall Mount, Full Cutoff, LED Wall Packs (CREE® BetaLED® XSPW™) *(26 56 19 00-0006)*

Note: UL wet listed. Includes 4,000K or 5,700K color temperature, 120-277 voltage, Class 2 driver, die-cast extruded aluminum housing assembly and white, black, silver or bronze powder coat finish. Excludes sensors.

26 56 19 00-0015	EA	25 Watt, Wall Mount, Full Cutoff, LED Wall Pack (CREE® BetaLED® XSPW™)	529.35	109.68
		For 3 Or 7-Pin NEMA Photocell Receptacle, Add	*18.52*	
		For 0 To 10 Volt Dimming, Add	*55.57*	
		For Multi-Level, Add	*55.57*	
		For >50 To 100, Deduct	*-26.47*	
		For >100 To 250, Deduct	*-39.70*	
		For >250 To 500, Deduct	*-60.68*	
		For >500 To 1,000, Deduct	*-81.67*	
		For >1,000, Deduct	*-102.65*	
26 56 19 00-0016	EA	42 Watt, Wall Mount, Full Cutoff, LED Wall Pack (CREE® BetaLED® XSPW™)	614.57	116.13
		For 3 Or 7-Pin NEMA Photocell Receptacle, Add	*18.52*	
		For 0 To 10 Volt Dimming, Add	*55.57*	
		For Multi-Level, Add	*55.57*	
		For >50 To 100, Deduct	*-30.73*	
		For >100 To 250, Deduct	*-46.09*	
		For >250 To 500, Deduct	*-71.01*	
		For >500 To 1,000, Deduct	*-95.94*	
		For >1,000, Deduct	*-120.86*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 19 00-0017		**Full Cutoff, LED Wall Packs (General Electric Evolve™)** *(26 56 19 00-0002)*		
26 56 19 00-0018	EA	29 Watt, Wall Mount, Full Cutoff, LED Wall Pack (General Electric EWS2 0 A7 D1 40 1 DKBZ)	885.76	109.68
		For >50 To 100, Deduct	*-44.29*	
		For >100 To 250, Deduct	*-66.43*	
		For >250 To 500, Deduct	*-105.24*	
		For >500 To 1,000, Deduct	*-144.04*	
		For >1,000, Deduct	*-182.84*	
26 56 19 00-0019		**Wall Mount, Full Cutoff, LED Wall Packs (Leotek® Eseta™)** *(26 56 19 00-0002)*		
		Note: UL wet listed. Includes 3,000K or 4,000K color temperature, 120-277 voltage, die-cast extruded aluminum housing assembly and gray powder coat finish. Excludes sensors.		
26 56 19 00-0020	EA	59 Watt, Wall Mount, Full Cutoff, LED Wall Pack (Leotek® Eseta™ ES1-24H-MV-NW-X-GY-XXX)	861.72	116.13
		For >50 To 100, Deduct	*-43.09*	
		For >100 To 250, Deduct	*-64.63*	
		For >250 To 500, Deduct	*-101.91*	
		For >500 To 1,000, Deduct	*-139.19*	
		For >1,000, Deduct	*-176.47*	
26 56 19 00-0021	EA	82 Watt, Wall Mount, Full Cutoff, LED Wall Pack (Leotek® Eseta™ ES1-48H-MV-NW-X-GY-XXX)	1,073.56	129.04
		For >50 To 100, Deduct	*-53.68*	
		For >100 To 250, Deduct	*-80.52*	
		For >250 To 500, Deduct	*-127.74*	
		For >500 To 1,000, Deduct	*-174.97*	
		For >1,000, Deduct	*-222.20*	
26 56 19 00-0022		**Full Cutoff, LED Wall Packs (McGraw-Edison)** *(26 56 19 00-0002)*		
26 56 19 00-0023	EA	One 7 LED Light Bar, 27 System Watts, 1 A Drive Current, Full Cutoff, LED Wall Pack (McGraw-Edison IST)	1,340.84	109.68
26 56 19 00-0024	EA	Two 7 LED Light Bars, 54 System Watts, 1 A Drive Current, Full Cutoff, LED Wall Pack (McGraw-Edison IST)	1,672.15	116.13
26 56 19 00-0025	EA	One 21 LED Light Bar, 27 System Watts, 350 mA Drive Current, Full Cutoff, LED Wall Pack (McGraw-Edison IST)	1,357.23	109.68
26 56 19 00-0026	EA	Two 21 LED Light Bars, 51 System Watts, 350 mA Drive Current, Full Cutoff, LED Wall Pack (McGraw-Edison IST)	1,822.00	116.13
26 56 19 00-0027		**Open Face LED Wall Pack** *(26 56 19 00-0001)*		
		Note: Heavy-duty cast aluminum housing is polyester powder coated to be rust and corrosion proof, High-quality shatter-resistant glass		
26 56 19 00-0028	EA	3,640 Lumens, 28 Watt, Open Face LED Wall Pack, With Motion Sensor (Maxlite WP-OP28U-50B-MS)	706.78	112.80
		For >50 To 100, Deduct	*-35.34*	
		For >100 To 250, Deduct	*-53.01*	
		For >250 To 500, Deduct	*-79.89*	
		For >500 To 1,000, Deduct	*-106.77*	
		For >1,000, Deduct	*-133.65*	
26 56 19 00-0029	EA	5,540 Lumens, 40 Watt, Open Face LED Wall Pack, With Motion Sensor (Maxlite WP-OP40U-50B-MS)	725.88	112.80
		For >50 To 100, Deduct	*-36.29*	
		For >100 To 250, Deduct	*-54.44*	
		For >250 To 500, Deduct	*-82.28*	
		For >500 To 1,000, Deduct	*-110.11*	
		For >1,000, Deduct	*-137.94*	
26 56 19 00-0030	EA	7,065 Lumens, 50 Watt, Open Face LED Wall Pack, With Motion Sensor (Maxlite WP-OP50U-50B-MS)	766.95	112.80
		For >50 To 100, Deduct	*-38.35*	
		For >100 To 250, Deduct	*-57.52*	
		For >250 To 500, Deduct	*-87.41*	
		For >500 To 1,000, Deduct	*-117.30*	
		For >1,000, Deduct	*-147.18*	
26 56 19 00-0031	EA	11,375 Lumens, 80 Watt, Open Face LED Wall Pack, With Motion Sensor (Maxlite WP-OP80U-50B-MS)	802.29	112.80
		For >50 To 100, Deduct	*-40.11*	
		For >100 To 250, Deduct	*-60.17*	
		For >250 To 500, Deduct	*-91.83*	
		For >500 To 1,000, Deduct	*-123.48*	
		For >1,000, Deduct	*-155.14*	
26 56 19 00-0032	EA	16,945 Lumens, 120 Watt, Open Face LED Wall Pack, With Motion Sensor (Maxlite WP-OP120U-50B-MS)	865.05	112.80
		For >50 To 100, Deduct	*-43.25*	
		For >100 To 250, Deduct	*-64.88*	
		For >250 To 500, Deduct	*-99.67*	
		For >500 To 1,000, Deduct	*-134.46*	
		For >1,000, Deduct	*-169.26*	
26 56 19 00-0033		**Wall Pack LED Fixtures (Jarvis WMFT)** *(26 56 19 00-0001)*		
26 56 19 00-0034	EA	3,200 Lumens, 25 Watt, 1 LED, Wall Mounted Security Fixture (Jarvis Corp WMFT-100)	320.81	82.45
		For >50 To 100, Deduct	*-16.04*	
		For >100 To 250, Deduct	*-24.06*	
		For >250 To 500, Deduct	*-35.98*	
		For >500 To 1,000, Deduct	*-47.90*	
		For >1,000, Deduct	*-59.82*	
26 56 19 00-0035	EA	6,451 Lumens, 52 Watt, 2 LEDs, Wall Mounted Security Fixture (Jarvis Corp WMFT-250)	355.48	82.45
		For >50 To 100, Deduct	*-17.77*	
		For >100 To 250, Deduct	*-26.66*	
		For >250 To 500, Deduct	*-40.31*	
		For >500 To 1,000, Deduct	*-53.97*	
		For >1,000, Deduct	*-67.62*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 19 00-0036	EA	9,503 Lumens, 77 Watt, 3 LEDs, Wall Mounted Security Fixture (Jarvis Corp WMFT-350)	407.49	82.45
		For >50 To 100, Deduct	*-20.37*	
		For >100 To 250, Deduct	*-30.56*	
		For >250 To 500, Deduct	*-46.81*	
		For >500 To 1,000, Deduct	*-63.07*	
		For >1,000, Deduct	*-79.32*	
26 56 19 00-0037	EA	5,235 Lumens, 54 Watt, 2 LEDs, Wall Mounted Security Fixture (Jarvis Corp WMFT-250-HV)	381.48	82.45
		For >50 To 100, Deduct	*-19.07*	
		For >100 To 250, Deduct	*-28.61*	
		For >250 To 500, Deduct	*-43.56*	
		For >500 To 1,000, Deduct	*-58.52*	
		For >1,000, Deduct	*-73.47*	
26 56 19 00-0038		**Wall Pack Accessories** *(26 56 19 00-0001)*		
26 56 19 00-0039	EA	Photocell For Wall Pack	138.91	28.20
26 56 19 00-0040	EA	Wire Guard For Mini And Small Wall Pack	156.16	28.20
26 56 19 00-0041	EA	Wire Guard For Medium And Large Wall Pack	228.29	28.20
26 56 19 00-0042	EA	Clear Polycarbonate Vandal Guard For Wall Packs	332.38	28.20
26 56 19 00-0043	EA	Full Cutoff Visor For Wall Pack	151.46	28.20
26 56 19 00-0044		**LED, Pole Mounted** *(26 56 19)*		
26 56 19 00-0045		**LED, Pole Mounted (Dialight)** *(26 56 19 00-0044)*		
26 56 19 00-0046	EA	131 Watt, Enclosed And Gasketed, Exterior LED Roadway Fixture (Dialight SL2C4ELGH)	2,065.12	184.52
		For >50 To 100, Deduct	*-103.26*	
		For >100 To 250, Deduct	*-154.88*	
		For >250 To 500, Deduct	*-248.91*	
		For >500 To 1,000, Deduct	*-342.94*	
		For >1,000, Deduct	*-436.97*	
26 56 19 00-0047		**LED, Pole Mounted (LED-Era)** *(26 56 19 00-0044)*		
26 56 19 00-0048	EA	88 Watt, Enclosed And Gasketed, LED Exterior Roadway Fixture (LED-Era LS5)	2,586.00	167.75
		For >50 To 100, Deduct	*-129.30*	
		For >100 To 250, Deduct	*-193.95*	
		For >250 To 500, Deduct	*-314.86*	
		For >500 To 1,000, Deduct	*-435.78*	
		For >1,000, Deduct	*-556.69*	
26 56 19 00-0049	EA	124 Watt, Enclosed And Gasketed, LED Exterior Roadway Fixture (LED-Era LS7)	3,083.29	184.52
		For >50 To 100, Deduct	*-154.16*	
		For >100 To 250, Deduct	*-231.25*	
		For >250 To 500, Deduct	*-376.19*	
		For >500 To 1,000, Deduct	*-521.12*	
		For >1,000, Deduct	*-666.06*	
26 56 19 00-0050		**LED, Pole Mounted (Lighting Science Group)** *(26 56 19 00-0044)*		
26 56 19 00-0051	EA	50 Watt, Type III Optical Distribution, Enclosed And Gasketed, LED Exterior Roadway Fixture (Lighting Science Group LSR1 CW R3 2B)	1,878.66	150.97
		For >50 To 100, Deduct	*-93.93*	
		For >100 To 250, Deduct	*-140.90*	
		For >250 To 500, Deduct	*-227.28*	
		For >500 To 1,000, Deduct	*-313.67*	
		For >1,000, Deduct	*-400.05*	
26 56 19 00-0052	EA	75 Watt, Type III Optical Distribution, Enclosed And Gasketed, LED Exterior Roadway Fixture (Lighting Science Group LSR2 CW R3 2B)	1,912.21	167.75
		For >50 To 100, Deduct	*-95.61*	
		For >100 To 250, Deduct	*-143.42*	
		For >250 To 500, Deduct	*-230.64*	
		For >500 To 1,000, Deduct	*-317.86*	
		For >1,000, Deduct	*-405.09*	
26 56 19 00-0053	EA	100 Watt, Type II Optical Distribution, Enclosed And Gasketed, LED Exterior Roadway Fixture (Lighting Science Group LSR3 CW R2 2B)	2,070.84	176.13
		For >50 To 100, Deduct	*-103.54*	
		For >100 To 250, Deduct	*-155.31*	
		For >250 To 500, Deduct	*-250.05*	
		For >500 To 1,000, Deduct	*-344.78*	
		For >1,000, Deduct	*-439.52*	
26 56 19 00-0054	EA	100 Watt, Type III Optical Distribution, Enclosed And Gasketed, LED Exterior Roadway Fixture (Lighting Science Group LSR3 CW R3 2B)	2,070.84	176.13
		For >50 To 100, Deduct	*-103.54*	
		For >100 To 250, Deduct	*-155.31*	
		For >250 To 500, Deduct	*-250.05*	
		For >500 To 1,000, Deduct	*-344.78*	
		For >1,000, Deduct	*-439.52*	
26 56 19 00-0055	EA	150 Watt, Type II Optical Distribution, Enclosed And Gasketed, LED Exterior Roadway Fixture (Lighting Science Group LSR4 CW R2 2B)	2,104.38	192.91
		For >50 To 100, Deduct	*-105.22*	
		For >100 To 250, Deduct	*-157.83*	
		For >250 To 500, Deduct	*-253.40*	
		For >500 To 1,000, Deduct	*-348.98*	
		For >1,000, Deduct	*-444.55*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 19 00-0056	EA	150 Watt, Type III Optical Distribution, Enclosed And Gasketed, LED Exterior Roadway Fixture (Lighting Science Group LSR4 CW R3 2B)	2,104.38	192.91
		For >50 To 100, Deduct	*-105.22*	
		For >100 To 250, Deduct	*-157.83*	
		For >250 To 500, Deduct	*-253.40*	
		For >500 To 1,000, Deduct	*-348.98*	
		For >1,000, Deduct	*-444.55*	
26 56 19 00-0057	EA	86 Watt, Type V Optical Distribution, Enclosed And Gasketed, LED Exterior Roadway Fixture (Lighting Science Group SHB CW CLR)	2,485.07	167.75
		For >50 To 100, Deduct	*-124.25*	
		For >100 To 250, Deduct	*-186.38*	
		For >250 To 500, Deduct	*-302.25*	
		For >500 To 1,000, Deduct	*-418.11*	
		For >1,000, Deduct	*-533.98*	

26 56 19 00-0058 LED, Roadway Lighting *(26 56 19)*

26 56 19 00-0059 LED Roadway Lighting (Philips Lumec) *(26 56 19 00-0058)*

26 56 19 00-0060 Horizontal Tenon Mount, LED Cobra Head Street Lights (Philips Lumec GPL Series) *(26 56 19 00-0059)*

Note: UL wet listed. Includes 4,000K color temperature, 120-480 voltage, 570mA driver, die-cast extruded aluminum housing assembly and powder coat finish. Excludes sensors.

26 56 19 00-0061	EA	49 LEDs, 102 Watt, Horizontal Tenon Mount, LED Cobra Head Street Light (Philips Lumec GPLS Series)	1,492.54	155.17
		For >50 To 100, Deduct	*-74.63*	
		For >100 To 250, Deduct	*-111.94*	
		For >250 To 500, Deduct	*-178.81*	
		For >500 To 1,000, Deduct	*-245.68*	
		For >1,000, Deduct	*-312.55*	
26 56 19 00-0062	EA	98 LEDs, 204 Watt, Horizontal Tenon Mount, LED Cobra Head Street Light (Philips Lumec GPLM Series)	2,335.86	159.36
		For >50 To 100, Deduct	*-116.79*	
		For >100 To 250, Deduct	*-175.19*	
		For >250 To 500, Deduct	*-284.01*	
		For >500 To 1,000, Deduct	*-392.84*	
		For >1,000, Deduct	*-501.66*	

26 56 19 00-0063 Horizontal Tenon Mount, LED Cobra Head Street Lights (Philips Lumec RFM Series) *(26 56 19 00-0059)*

Note: UL wet listed. Includes 3,000 to 4,000K color temperature, 120-277 voltage, up to 1050mA driver, die-cast extruded aluminum housing assembly and powder coat finish. Excludes sensors.

26 56 19 00-0064	EA	48 LEDs, 55 Watt, Type III Medium, 120-277 Volt, Horizontal Tenon Mount, LED Cobra Head Street Light (Philips Lumec RFM Series)	1,195.47	155.17
		For >50 To 100, Deduct	*-59.77*	
		For >100 To 250, Deduct	*-89.66*	
		For >250 To 500, Deduct	*-141.68*	
		For >500 To 1,000, Deduct	*-193.69*	
		For >1,000, Deduct	*-245.71*	
26 56 19 00-0065	EA	48 LEDs, 80 Watt, Type III Medium, 120-277 Volt, RoadFocus Roadway, LED Cobra Head Luminaire (Philips Lumec RFM Series)	1,283.98	155.17
		For >50 To 100, Deduct	*-64.20*	
		For >100 To 250, Deduct	*-96.30*	
		For >250 To 500, Deduct	*-152.74*	
		For >500 To 1,000, Deduct	*-209.18*	
		For >1,000, Deduct	*-265.62*	
26 56 19 00-0066	EA	48 LEDs, 108 Watt, Type III Medium, 120-277 Volt, RoadFocus Roadway, LED Cobra Head Luminaire (Philips Lumec RFM Series)	1,372.49	155.17
		For >50 To 100, Deduct	*-68.62*	
		For >100 To 250, Deduct	*-102.94*	
		For >250 To 500, Deduct	*-163.80*	
		For >500 To 1,000, Deduct	*-224.67*	
		For >1,000, Deduct	*-285.54*	

26 56 19 00-0067 LED Roadway Lighting (Lithonia) *(26 56 19 00-0058)*

26 56 19 00-0068 Horizontal Tenon Mount, LED Cobra Head Street Lights (Lithonia CSX1 Series) *(26 56 19 00-0067)*

Note: UL wet listed. Includes 4,000K color temperature, 120-480 voltage, 700mA driver, die-cast extruded aluminum housing assembly and bronze powder coat finish. Excludes sensors.

26 56 19 00-0069	EA	30 LEDs, 74 Watt, Horizontal Tenon Mount, LED Cobra Head Street Light (Lithonia CSX1 Series)	2,449.58	146.78
		For >50 To 100, Deduct	*-122.48*	
		For >100 To 250, Deduct	*-183.72*	
		For >250 To 500, Deduct	*-298.86*	
		For >500 To 1,000, Deduct	*-414.00*	
		For >1,000, Deduct	*-529.14*	
26 56 19 00-0070	EA	60 LEDs, 146 Watt, Horizontal Tenon Mount, LED Cobra Head Street Light (Lithonia CSX1 Series)	4,084.39	150.97
		For >50 To 100, Deduct	*-204.22*	
		For >100 To 250, Deduct	*-306.33*	
		For >250 To 500, Deduct	*-503.00*	
		For >500 To 1,000, Deduct	*-699.67*	
		For >1,000, Deduct	*-896.34*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 19 00-0071		LED Roadway Lighting (CREE® BetaLED®) *(26 56 19 00-0058)*		
26 56 19 00-0072		Horizontal Tenon Mount, LED Cobra Head Street Lights (CREE® BetaLED® LEDway® STR-LWY) *(26 56 19 00-0071)*		
		Note: UL wet listed. Includes 6,000K color temperature, 120-480 voltage, 350mA driver, die-cast extruded aluminum housing assembly and white, black, silver or bronze powder coat finish. Includes Type II Medium, Type II Short or Type III Medium optic. Excludes sensors.		
26 56 19 00-0073	EA	20 LEDs, 25 Watt, Horizontal Tenon Mount, LED Cobra Head Street Light (CREE® BetaLED® LEDway® STR-LWY)	822.31	142.59
		For >50 To 100, Deduct	*-41.12*	
		For >100 To 250, Deduct	*-61.67*	
		For >250 To 500, Deduct	*-95.66*	
		For >500 To 1,000, Deduct	*-129.65*	
		For >1,000, Deduct	*-163.63*	
26 56 19 00-0074	EA	30 LEDs, 35 Watt, Horizontal Tenon Mount, LED Cobra Head Street Light (CREE® BetaLED® LEDway® STR-LWY)	921.80	146.78
		For >50 To 100, Deduct	*-46.09*	
		For >100 To 250, Deduct	*-69.14*	
		For >250 To 500, Deduct	*-107.89*	
		For >500 To 1,000, Deduct	*-146.64*	
		For >1,000, Deduct	*-185.39*	
26 56 19 00-0075	EA	40 LEDs, 45 Watt, Horizontal Tenon Mount, LED Cobra Head Street Light (CREE® BetaLED® LEDway® STR-LWY)	1,041.69	150.97
		For >50 To 100, Deduct	*-52.08*	
		For >100 To 250, Deduct	*-78.13*	
		For >250 To 500, Deduct	*-122.66*	
		For >500 To 1,000, Deduct	*-167.20*	
		For >1,000, Deduct	*-211.73*	
26 56 19 00-0076	EA	50 LEDs, 55 Watt, Horizontal Tenon Mount, LED Cobra Head Street Light (CREE® BetaLED® LEDway® STR-LWY)	1,142.74	155.17
		For >50 To 100, Deduct	*-57.14*	
		For >100 To 250, Deduct	*-85.71*	
		For >250 To 500, Deduct	*-135.08*	
		For >500 To 1,000, Deduct	*-184.46*	
		For >1,000, Deduct	*-233.84*	
26 56 19 00-0077	EA	60 LEDs, 65 Watt, Horizontal Tenon Mount, LED Cobra Head Street Light (CREE® BetaLED® LEDway® STR-LWY)	1,243.80	159.36
		For >50 To 100, Deduct	*-62.19*	
		For >100 To 250, Deduct	*-93.29*	
		For >250 To 500, Deduct	*-147.51*	
		For >500 To 1,000, Deduct	*-201.73*	
		For >1,000, Deduct	*-255.95*	
26 56 19 00-0078	EA	70 LEDs, 75 Watt, Horizontal Tenon Mount, LED Cobra Head Street Light (CREE® BetaLED® LEDway® STR-LWY)	1,483.05	163.55
		For >50 To 100, Deduct	*-74.15*	
		For >100 To 250, Deduct	*-111.23*	
		For >250 To 500, Deduct	*-177.20*	
		For >500 To 1,000, Deduct	*-243.18*	
		For >1,000, Deduct	*-309.15*	
26 56 19 00-0079	EA	80 LEDs, 86 Watt, Horizontal Tenon Mount, LED Cobra Head Street Light (CREE® BetaLED® LEDway® STR-LWY)	1,584.11	167.75
		For >50 To 100, Deduct	*-79.21*	
		For >100 To 250, Deduct	*-118.81*	
		For >250 To 500, Deduct	*-189.63*	
		For >500 To 1,000, Deduct	*-260.44*	
		For >1,000, Deduct	*-331.26*	
26 56 19 00-0080	EA	90 LEDs, 96 Watt, Horizontal Tenon Mount, LED Cobra Head Street Light (CREE® BetaLED® LEDway® STR-LWY)	1,683.59	171.94
		For >50 To 100, Deduct	*-84.18*	
		For >100 To 250, Deduct	*-126.27*	
		For >250 To 500, Deduct	*-201.85*	
		For >500 To 1,000, Deduct	*-277.43*	
		For >1,000, Deduct	*-353.02*	
26 56 19 00-0081	EA	100 LEDs, 111 Watt, Horizontal Tenon Mount, LED Cobra Head Street Light (CREE® BetaLED® LEDway® STR-LWY)	1,877.31	176.13
		For >50 To 100, Deduct	*-93.87*	
		For >100 To 250, Deduct	*-140.80*	
		For >250 To 500, Deduct	*-225.86*	
		For >500 To 1,000, Deduct	*-310.92*	
		For >1,000, Deduct	*-395.97*	
26 56 19 00-0082	EA	110 LEDs, 122 Watt, Horizontal Tenon Mount, LED Cobra Head Street Light (CREE® BetaLED® LEDway® STR-LWY)	1,978.36	180.33
		For >50 To 100, Deduct	*-98.92*	
		For >100 To 250, Deduct	*-148.38*	
		For >250 To 500, Deduct	*-238.28*	
		For >500 To 1,000, Deduct	*-328.18*	
		For >1,000, Deduct	*-418.08*	
26 56 19 00-0083	EA	120 LEDs, 133 Watt, Horizontal Tenon Mount, LED Cobra Head Street Light (CREE® BetaLED® LEDway® STR-LWY)	2,079.41	184.52
		For >50 To 100, Deduct	*-103.97*	
		For >100 To 250, Deduct	*-155.96*	
		For >250 To 500, Deduct	*-250.70*	
		For >500 To 1,000, Deduct	*-345.44*	
		For >1,000, Deduct	*-440.19*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 19 00-0084		**Surface Mount, LED Transportation Fixtures (CREE® BetaLED® Edge® TSP-EDG)** *(26 56 19 00-0071)* Note: Direct, cantenary or pendant mount. UL wet listed. Includes 5,700K color temperature, 120-480 voltage, 350mA driver, die-cast extruded aluminum housing assembly and white, black, silver or bronze powder coat finish. Excludes sensors.		
26 56 19 00-0085	EA	40 LEDs, 47 Watt, Surface Mount, LED Transportation Fixture (CREE® BetaLED® Edge® TSP-EDG)	1,614.95	150.97
		For Multi-Level Drive Currents, Add	*219.88*	
		For >50 To 100, Deduct	*-80.75*	
		For >100 To 250, Deduct	*-121.12*	
		For >250 To 500, Deduct	*-194.32*	
		For >500 To 1,000, Deduct	*-267.52*	
		For >1,000, Deduct	*-340.72*	
26 56 19 00-0086	EA	60 LEDs, 68 Watt, Surface Mount, LED Transportation Fixture (CREE® BetaLED® Edge® TSP-EDG)	1,862.61	159.36
		For Multi-Level Drive Currents, Add	*219.88*	
		For >50 To 100, Deduct	*-93.13*	
		For >100 To 250, Deduct	*-139.70*	
		For >250 To 500, Deduct	*-224.86*	
		For >500 To 1,000, Deduct	*-310.02*	
		For >1,000, Deduct	*-395.18*	
26 56 19 00-0087	EA	80 LEDs, 90 Watt, Surface Mount, LED Transportation Fixture (CREE® BetaLED® Edge® TSP-EDG)	2,110.26	167.75
		For Multi-Level Drive Currents, Add	*219.88*	
		For >50 To 100, Deduct	*-105.51*	
		For >100 To 250, Deduct	*-158.27*	
		For >250 To 500, Deduct	*-255.40*	
		For >500 To 1,000, Deduct	*-352.52*	
		For >1,000, Deduct	*-449.65*	
26 56 19 00-0088	EA	100 LEDs, 111 Watt, Surface Mount, LED Transportation Fixture (CREE® BetaLED® Edge® TSP-EDG)	2,357.91	176.13
		For Multi-Level Drive Currents, Add	*219.88*	
		For >50 To 100, Deduct	*-117.90*	
		For >100 To 250, Deduct	*-176.84*	
		For >250 To 500, Deduct	*-285.93*	
		For >500 To 1,000, Deduct	*-395.02*	
		For >1,000, Deduct	*-504.11*	
26 56 19 00-0089	EA	120 LEDs, 132 Watt, Surface Mount, LED Transportation Fixture (CREE® BetaLED® Edge® TSP-EDG)	3,095.58	184.52
		For Multi-Level Drive Currents, Add	*219.88*	
		For >50 To 100, Deduct	*-154.78*	
		For >100 To 250, Deduct	*-232.17*	
		For >250 To 500, Deduct	*-377.72*	
		For >500 To 1,000, Deduct	*-523.27*	
		For >1,000, Deduct	*-668.83*	
26 56 19 00-0090	EA	140 LEDs, 157 Watt, Surface Mount, LED Transportation Fixture (CREE® BetaLED® Edge® TSP-EDG)	3,343.23	192.91
		For Multi-Level Drive Currents, Add	*219.88*	
		For >50 To 100, Deduct	*-167.16*	
		For >100 To 250, Deduct	*-250.74*	
		For >250 To 500, Deduct	*-408.26*	
		For >500 To 1,000, Deduct	*-565.77*	
		For >1,000, Deduct	*-723.29*	
26 56 19 00-0091	EA	160 LEDs, 179 Watt, Surface Mount, LED Transportation Fixture (CREE® BetaLED® Edge® TSP-EDG)	3,590.89	201.29
		For Multi-Level Drive Currents, Add	*219.88*	
		For >50 To 100, Deduct	*-179.54*	
		For >100 To 250, Deduct	*-269.32*	
		For >250 To 500, Deduct	*-438.80*	
		For >500 To 1,000, Deduct	*-608.28*	
		For >1,000, Deduct	*-777.76*	
26 56 19 00-0092		**Horizontal Tenon Mount, LED Cobra Head Street Lights (CREE® BetaLED® XSP)** *(26 56 19 00-0071)* Note: UL wet listed. Includes 120-277 voltage, die-cast extruded aluminum housing assembly and white, black, silver or bronze powder coat finish. Excludes sensors.		
26 56 19 00-0093	EA	4,806 Lumens, 4000K CCT, Horizontal Tenon Mount, LED Cobra Head Street Light (CREE® XSP1™ BXSP-B-HT-XXX-A)	689.00	150.97
		For 3 Or 7-Pin NEMA Photocell Receptacle, Add	*18.52*	
		For Backlight Control Shield, Add	*32.61*	
		For Field Adjustable Output, Add	*27.79*	
		For Bird Spikes, Add	*50.11*	
		For Field Adjustable Output And Utility Label, Add	*37.05*	
		For Fuse, Add	*55.57*	
		For Field Adjustable Output, Utility Label And 3 Or 7-Pin NEMA Photocell Receptacle, Add	*55.57*	
		For 480 Volt, Add	*83.36*	
		For Multi-Level, Add	*120.40*	
		For >50 To 100, Deduct	*-34.45*	
		For >100 To 250, Deduct	*-51.68*	
		For >250 To 500, Deduct	*-78.58*	
		For >500 To 1,000, Deduct	*-105.48*	
		For >1,000, Deduct	*-132.38*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 19 00-0094	EA	5,340 Lumens, 5700K, Horizontal Tenon Mount, LED Cobra Head Street Light (CREE® XSP1™ BXSP-B-HT-XXX-A)	689.00	150.97
		For 3 Or 7-Pin NEMA Photocell Receptacle, Add	*18.52*	
		For Backlight Control Shield, Add	*32.61*	
		For Field Adjustable Output, Add	*27.79*	
		For Bird Spikes, Add	*50.11*	
		For Field Adjustable Output And Utility Label, Add	*37.05*	
		For Fuse, Add	*55.57*	
		For Field Adjustable Output, Utility Label And 3 Or 7-Pin NEMA Photocell Receptacle, Add	*55.57*	
		For 480 Volt, Add	*83.36*	
		For Multi-Level, Add	*120.40*	
		For >50 To 100, Deduct	*-34.45*	
		For >100 To 250, Deduct	*-51.68*	
		For >250 To 500, Deduct	*-78.58*	
		For >500 To 1,000, Deduct	*-105.48*	
		For >1,000, Deduct	*-132.38*	
26 56 19 00-0095	EA	8,407 Lumens, 4000K CCT, Horizontal Tenon Mount, LED Cobra Head Street Light (CREE® XSP1™ BXSP-C-HT-XXX-E)	759.01	150.97
		For 3 Or 7-Pin NEMA Photocell Receptacle, Add	*18.52*	
		For Backlight Control Shield, Add	*32.61*	
		For Field Adjustable Output, Add	*27.79*	
		For Bird Spikes, Add	*50.11*	
		For Field Adjustable Output And Utility Label, Add	*37.05*	
		For Field Adjustable Output, Utility Label And 3 Or 7-Pin NEMA Photocell Receptacle, Add	*55.57*	
		For 480 Volt, Add	*83.36*	
		For >50 To 100, Deduct	*-37.95*	
		For >100 To 250, Deduct	*-56.93*	
		For >250 To 500, Deduct	*-87.33*	
		For >500 To 1,000, Deduct	*-117.73*	
		For >1,000, Deduct	*-148.13*	
26 56 19 00-0096	EA	8,820 Lumens, 5700K, Horizontal Tenon Mount, LED Cobra Head Street Light (CREE® XSP1™ BXSP-C-HT-XXX-E)	759.01	150.97
		For 3 Or 7-Pin NEMA Photocell Receptacle, Add	*18.52*	
		For Backlight Control Shield, Add	*32.61*	
		For Field Adjustable Output, Add	*27.79*	
		For Bird Spikes, Add	*50.11*	
		For Field Adjustable Output And Utility Label, Add	*37.05*	
		For Field Adjustable Output, Utility Label And 3 Or 7-Pin NEMA Photocell Receptacle, Add	*55.57*	
		For 480 Volt, Add	*83.36*	
		For >50 To 100, Deduct	*-37.95*	
		For >100 To 250, Deduct	*-56.93*	
		For >250 To 500, Deduct	*-87.33*	
		For >500 To 1,000, Deduct	*-117.73*	
		For >1,000, Deduct	*-148.13*	
26 56 19 00-0097	EA	9,612 Lumens, 4000K CCT, Horizontal Tenon Mount, LED Cobra Head Street Light (CREE® XSP2™ BXSP-B-HT-XXX-B)	883.48	150.97
		For 3 Or 7-Pin NEMA Photocell Receptacle, Add	*18.52*	
		For Field Adjustable Output, Add	*27.79*	
		For Backlight Control Shield, Add	*46.21*	
		For Field Adjustable Output And Utility Label, Add	*37.05*	
		For Fuse, Add	*55.57*	
		For Field Adjustable Output, Utility Label And 3 Or 7-Pin NEMA Photocell Receptacle, Add	*55.57*	
		For Bird Spikes, Add	*81.24*	
		For 480 Volt, Add	*83.36*	
		For Multi-Level, Add	*120.40*	
		For >50 To 100, Deduct	*-44.17*	
		For >100 To 250, Deduct	*-66.26*	
		For >250 To 500, Deduct	*-102.89*	
		For >500 To 1,000, Deduct	*-139.51*	
		For >1,000, Deduct	*-176.14*	
26 56 19 00-0098	EA	10,680 Lumens, 5700K, Horizontal Tenon Mount, LED Cobra Head Street Light (CREE® XSP2™ BXSP-B-HT-XXX-B)	883.48	150.97
		For 3 Or 7-Pin NEMA Photocell Receptacle, Add	*18.52*	
		For Field Adjustable Output, Add	*27.79*	
		For Backlight Control Shield, Add	*46.21*	
		For Field Adjustable Output And Utility Label, Add	*37.05*	
		For Fuse, Add	*55.57*	
		For Field Adjustable Output, Utility Label And 3 Or 7-Pin NEMA Photocell Receptacle, Add	*55.57*	
		For Bird Spikes, Add	*81.24*	
		For 480 Volt, Add	*83.36*	
		For Multi-Level, Add	*120.40*	
		For >50 To 100, Deduct	*-44.17*	
		For >100 To 250, Deduct	*-66.26*	
		For >250 To 500, Deduct	*-102.89*	
		For >500 To 1,000, Deduct	*-139.51*	
		For >1,000, Deduct	*-176.14*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 19 00-0099	EA	13,732 Lumens, 4000K CCT, Horizontal Tenon Mount, LED Cobra Head Street Light (CREE® XSP2™ BXSP-C-HT-XXX-F)	1,000.19	150.97
		For 3 Or 7-Pin NEMA Photocell Receptacle, Add	*18.52*	
		For Field Adjustable Output, Add	*27.79*	
		For Backlight Control Shield, Add	*46.21*	
		For Field Adjustable Output And Utility Label, Add	*37.05*	
		For Field Adjustable Output, Utility Label And 3 Or 7-Pin NEMA Photocell Receptacle, Add	*55.57*	
		For Bird Spikes, Add	*81.24*	
		For 480 Volt, Add	*83.36*	
		For >50 To 100, Deduct	*-50.01*	
		For >100 To 250, Deduct	*-75.01*	
		For >250 To 500, Deduct	*-117.48*	
		For >500 To 1,000, Deduct	*-159.94*	
		For >1,000, Deduct	*-202.40*	
26 56 19 00-0100	EA	14,408 Lumens, 5700K, Horizontal Tenon Mount, LED Cobra Head Street Light (CREE® XSP2™ BXSP-C-HT-XXX-F)	1,000.19	150.97
		For 3 Or 7-Pin NEMA Photocell Receptacle, Add	*18.52*	
		For Field Adjustable Output, Add	*27.79*	
		For Backlight Control Shield, Add	*46.21*	
		For Field Adjustable Output And Utility Label, Add	*37.05*	
		For Field Adjustable Output, Utility Label And 3 Or 7-Pin NEMA Photocell Receptacle, Add	*55.57*	
		For Bird Spikes, Add	*81.24*	
		For 480 Volt, Add	*83.36*	
		For >50 To 100, Deduct	*-50.01*	
		For >100 To 250, Deduct	*-75.01*	
		For >250 To 500, Deduct	*-117.48*	
		For >500 To 1,000, Deduct	*-159.94*	
		For >1,000, Deduct	*-202.40*	
26 56 19 00-0101	EA	2,529 Lumens, 4000K CCT, Horizontal Tenon Mount, LED Cobra Head Street Light (CREE® XSPR™ BXSPR-A-O-X-X-G)	564.51	150.97
		For Utility Label, Add	*9.26*	
		For 3 Or 7-Pin NEMA Photocell Receptacle, Add	*18.52*	
		For Utility Label And 3 Or 7-Pin NEMA Photocell Receptacle, Add	*27.79*	
		For 0 To 10 Volt Dimming, Add	*55.57*	
		For >50 To 100, Deduct	*-28.23*	
		For >100 To 250, Deduct	*-42.34*	
		For >250 To 500, Deduct	*-63.02*	
		For >500 To 1,000, Deduct	*-83.69*	
		For >1,000, Deduct	*-104.37*	
26 56 19 00-0102	EA	2,722 Lumens, 5700K, Horizontal Tenon Mount, LED Cobra Head Street Light (CREE® XSPR™ BXSPR-A-O-X-X-G)	564.51	150.97
		For Utility Label, Add	*9.26*	
		For 3 Or 7-Pin NEMA Photocell Receptacle, Add	*18.52*	
		For Utility Label And 3 Or 7-Pin NEMA Photocell Receptacle, Add	*27.79*	
		For 0 To 10 Volt Dimming, Add	*55.57*	
		For >50 To 100, Deduct	*-28.23*	
		For >100 To 250, Deduct	*-42.34*	
		For >250 To 500, Deduct	*-63.02*	
		For >500 To 1,000, Deduct	*-83.69*	
		For >1,000, Deduct	*-104.37*	
26 56 19 00-0103	EA	3,819 Lumens, 4000K CCT, Horizontal Tenon Mount, LED Cobra Head Street Light (CREE® XSPR™BXSPR-A-O-X-X-C)	593.69	150.97
		For Utility Label, Add	*9.26*	
		For 3 Or 7-Pin NEMA Photocell Receptacle, Add	*18.52*	
		For Utility Label And 3 Or 7-Pin NEMA Photocell Receptacle, Add	*27.79*	
		For 0 To 10 Volt Dimming, Add	*55.57*	
		For >50 To 100, Deduct	*-29.68*	
		For >100 To 250, Deduct	*-44.53*	
		For >250 To 500, Deduct	*-66.66*	
		For >500 To 1,000, Deduct	*-88.80*	
		For >1,000, Deduct	*-110.93*	
26 56 19 00-0104	EA	4,109 Lumens, 5700K, Horizontal Tenon Mount, LED Cobra Head Street Light (CREE® XSPR™BXSPR-A-O-X-X-C)	593.69	150.97
		For Utility Label, Add	*9.26*	
		For 3 Or 7-Pin NEMA Photocell Receptacle, Add	*18.52*	
		For Utility Label And 3 Or 7-Pin NEMA Photocell Receptacle, Add	*27.79*	
		For 0 To 10 Volt Dimming, Add	*55.57*	
		For >50 To 100, Deduct	*-29.68*	
		For >100 To 250, Deduct	*-44.53*	
		For >250 To 500, Deduct	*-66.66*	
		For >500 To 1,000, Deduct	*-88.80*	
		For >1,000, Deduct	*-110.93*	
26 56 19 00-0105	EA	4,548 Lumens, 4000K CCT, Horizontal Tenon Mount, LED Cobra Head Street Light (CREE® XSPR™ BXSPR-B-HT-XXX-A)	603.41	150.97
		For 3 Or 7-Pin NEMA Photocell Receptacle, Add	*18.52*	
		For Field Adjustable Output, Add	*27.79*	
		For Field Adjustable Output And Utility Label, Add	*37.05*	
		For Field Adjustable Output, Utility Label And 3 Or 7-Pin NEMA Photocell Receptacle, Add	*55.57*	
		For 0 To 10 Volt Dimming, Add	*55.57*	
		For >50 To 100, Deduct	*-30.17*	
		For >100 To 250, Deduct	*-45.26*	
		For >250 To 500, Deduct	*-67.88*	
		For >500 To 1,000, Deduct	*-90.50*	
		For >1,000, Deduct	*-113.12*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 19 00-0106	EA	4,627 Lumens, 5700K, Horizontal Tenon Mount, LED Cobra Head Street Light (CREE® XSPR™ BXSPR-B-HT-XXX-A)	603.41	150.97
		For 3 Or 7-Pin NEMA Photocell Receptacle, Add	*18.52*	
		For Field Adjustable Output, Add	*27.79*	
		For Field Adjustable Output And Utility Label, Add	*37.05*	
		For Field Adjustable Output, Utility Label And 3 Or 7-Pin NEMA Photocell Receptacle, Add	*55.57*	
		For 0 To 10 Volt Dimming, Add	*55.57*	
		For >50 To 100, Deduct	*-30.17*	
		For >100 To 250, Deduct	*-45.26*	
		For >250 To 500, Deduct	*-67.88*	
		For >500 To 1,000, Deduct	*-90.50*	
		For >1,000, Deduct	*-113.12*	

26 56 19 00-0107 Horizontal Tenon Mount, LED Cobra Head Street Lights (CREE® RSW™)

(26 56 19 00-0071)

Note: UL wet listed. Includes 120-277 voltage, die-cast extruded aluminum housing assembly and gray powder coat finish. Includes utility label and NEMA® photocell receptacle. Excludes sensors.

26 56 19 00-0108	EA	3,300 Lumens, 3000K CCT, Horizontal Tenon Mount, LED Cobra Head Street Light (CREE® RSW-HT-XXX-30W-30K-UL-GY-N)	583.97	150.97
		For Field Adjustable Output, Add	*27.79*	
		For Backlight Control Shield, Add	*61.41*	
		For Bird Spikes, Add	*81.78*	
		For >50 To 100, Deduct	*-29.20*	
		For >100 To 250, Deduct	*-43.80*	
		For >250 To 500, Deduct	*-65.45*	
		For >500 To 1,000, Deduct	*-87.10*	
		For >1,000, Deduct	*-108.75*	
26 56 19 00-0109	EA	3,300 Lumens, 4000K CCT, Horizontal Tenon Mount, LED Cobra Head Street Light (CREE® RSW-HT-XXX-30W-40K-UL-GY-N)	583.97	150.97
		For Field Adjustable Output, Add	*27.79*	
		For Backlight Control Shield, Add	*61.41*	
		For Bird Spikes, Add	*81.78*	
		For >50 To 100, Deduct	*-29.20*	
		For >100 To 250, Deduct	*-43.80*	
		For >250 To 500, Deduct	*-65.45*	
		For >500 To 1,000, Deduct	*-87.10*	
		For >1,000, Deduct	*-108.75*	
26 56 19 00-0110	EA	5,000 Lumens, 3000K CCT, Horizontal Tenon Mount, LED Cobra Head Street Light (CREE® RSW-HT-2ME-50W-30K-UL-GY-N)	603.41	150.97
		For Field Adjustable Output, Add	*27.79*	
		For Backlight Control Shield, Add	*61.41*	
		For Bird Spikes, Add	*81.78*	
		For >50 To 100, Deduct	*-30.17*	
		For >100 To 250, Deduct	*-45.26*	
		For >250 To 500, Deduct	*-67.88*	
		For >500 To 1,000, Deduct	*-90.50*	
		For >1,000, Deduct	*-113.12*	
26 56 19 00-0111	EA	5,000 Lumens, 4000K CCT, Horizontal Tenon Mount, LED Cobra Head Street Light (CREE® RSW-HT-2ME-50W-40K-UL-GY-N)	603.41	150.97
		For Field Adjustable Output, Add	*27.79*	
		For Backlight Control Shield, Add	*61.41*	
		For Bird Spikes, Add	*81.78*	
		For >50 To 100, Deduct	*-30.17*	
		For >100 To 250, Deduct	*-45.26*	
		For >250 To 500, Deduct	*-67.88*	
		For >500 To 1,000, Deduct	*-90.50*	
		For >1,000, Deduct	*-113.12*	

26 56 19 00-0112 LED Roadway Lighting (Cooper Lighting) *(26 56 19 00-0058)*

26 56 19 00-0113 Horizontal Tenon Mount, LED Roadway Fixtures (Cooper Lighting Streetworks NVN™) *(26 56 19 00-0112)*

Note: UL wet listed. Includes 4,000K color temperature, 120-480 voltage, die-cast extruded aluminum housing assembly and powder coat finish. Excludes sensors.

26 56 19 00-0114	EA	1 LED Light Square, 51 Watt, Horizontal Tenon Mount, LED Roadway Fixture (Cooper Lighting Streetworks™ NVN-AA)	1,043.35	150.97
		For >50 To 100, Deduct	*-52.17*	
		For >100 To 250, Deduct	*-78.25*	
		For >250 To 500, Deduct	*-122.87*	
		For >500 To 1,000, Deduct	*-167.49*	
		For >1,000, Deduct	*-212.11*	
26 56 19 00-0115	EA	2 LED Light Squares, 103 Watt, Horizontal Tenon Mount, LED Roadway Fixture (Cooper Lighting Streetworks™ NVN-AA)	1,427.94	167.75
		For >50 To 100, Deduct	*-71.40*	
		For >100 To 250, Deduct	*-107.10*	
		For >250 To 500, Deduct	*-170.11*	
		For >500 To 1,000, Deduct	*-233.12*	
		For >1,000, Deduct	*-296.12*	
26 56 19 00-0116	EA	3 LED Light Squares, 154 Watt, Horizontal Tenon Mount, LED Roadway Fixture (Cooper Lighting Streetworks™ NVN-AA)	1,526.82	192.91
		For >50 To 100, Deduct	*-76.34*	
		For >100 To 250, Deduct	*-114.51*	
		For >250 To 500, Deduct	*-181.21*	
		For >500 To 1,000, Deduct	*-247.90*	
		For >1,000, Deduct	*-314.60*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 19 00-0117	EA	4 LED Light Squares, 206 Watt, Horizontal Tenon Mount, LED Roadway Fixture (Cooper Lighting Streetworks™ NVN-AA)	2,300.64	209.68
		For >50 To 100, Deduct	*-115.03*	
		For >100 To 250, Deduct	*-172.55*	
		For >250 To 500, Deduct	*-277.10*	
		For >500 To 1,000, Deduct	*-381.64*	
		For >1,000, Deduct	*-486.19*	
26 56 19 00-0118	EA	6 LED Light Squares, 309 Watt, Horizontal Tenon Mount, LED Roadway Fixture (Cooper Lighting Streetworks™ NVN-AA)	3,030.97	238.72
		For >50 To 100, Deduct	*-151.55*	
		For >100 To 250, Deduct	*-227.32*	
		For >250 To 500, Deduct	*-366.94*	
		For >500 To 1,000, Deduct	*-506.55*	
		For >1,000, Deduct	*-646.16*	

26 56 19 00-0119 LED Roadway Lighting (PlanLED) *(26 56 19 00-0058)*

26 56 19 00-0120 Horizontal Tenon Mount, LED Roadway Fixtures (PlanLED GigaTera HERA) *(26 56 19 00-0119)*

Note: UL wet listed. Includes 3,000K, 4,000K or 5,000K color temperature, 120-277 voltage, integral 20kV surge suppression, die-cast extruded aluminum housing assembly and powder coat finish. Excludes sensors.

26 56 19 00-0121	EA	8,500 Lumens, 85 Watt, Horizontal Tenon Mount, LED Roadway Fixture (PlanLED GigaTera HERA 85W)	1,266.89	146.78
		For >50 To 100, Deduct	*-63.34*	
		For >100 To 250, Deduct	*-95.02*	
		For >250 To 500, Deduct	*-151.02*	
		For >500 To 1,000, Deduct	*-207.03*	
		For >1,000, Deduct	*-263.03*	
26 56 19 00-0122	EA	11,000 Lumens, 110 Watt, Horizontal Tenon Mount, LED Roadway Fixture (PlanLED GigaTera HERA 110W)	1,382.24	148.39
		For >50 To 100, Deduct	*-69.11*	
		For >100 To 250, Deduct	*-103.67*	
		For >250 To 500, Deduct	*-165.36*	
		For >500 To 1,000, Deduct	*-227.05*	
		For >1,000, Deduct	*-288.75*	
26 56 19 00-0123	EA	15,000 Lumens, 150 Watt, Horizontal Tenon Mount, LED Roadway Fixture (PlanLED GigaTera HERA 150W)	1,472.63	150.97
		For >50 To 100, Deduct	*-73.63*	
		For >100 To 250, Deduct	*-110.45*	
		For >250 To 500, Deduct	*-176.53*	
		For >500 To 1,000, Deduct	*-242.61*	
		For >1,000, Deduct	*-308.70*	

26 56 19 00-0124 Horizontal Tenon Mount, LED Roadway Fixtures (PlanLED GigaTera SETA) *(26 56 19 00-0119)*

Note: UL wet listed. Includes 3,000K, 3,500K, 4,000K or 5,000K color temperature, 120-277 voltage, integral 20kV surge suppression, die-cast extruded aluminum housing assembly and powder coat finish. Excludes sensors.

26 56 19 00-0125	EA	7,200 Lumens, 60 Watt, Horizontal Tenon Mount, LED Roadway Fixture (PlanLED GigaTera SETA SET060)	817.98	143.23
		For >50 To 100, Deduct	*-40.90*	
		For >100 To 250, Deduct	*-61.35*	
		For >250 To 500, Deduct	*-95.09*	
		For >500 To 1,000, Deduct	*-128.82*	
		For >1,000, Deduct	*-162.56*	
26 56 19 00-0126	EA	10,000 Lumens, 80 Watt, Horizontal Tenon Mount, LED Roadway Fixture (PlanLED GigaTera SETA SET080)	879.21	145.81
		For >50 To 100, Deduct	*-43.96*	
		For >100 To 250, Deduct	*-65.94*	
		For >250 To 500, Deduct	*-102.61*	
		For >500 To 1,000, Deduct	*-139.28*	
		For >1,000, Deduct	*-175.95*	
26 56 19 00-0127	EA	12,500 Lumens, 100 Watt, Horizontal Tenon Mount, LED Roadway Fixture (PlanLED GigaTera SETA SET100)	976.32	148.39
		For >50 To 100, Deduct	*-48.82*	
		For >100 To 250, Deduct	*-73.22*	
		For >250 To 500, Deduct	*-114.62*	
		For >500 To 1,000, Deduct	*-156.02*	
		For >1,000, Deduct	*-197.41*	

26 56 19 00-0128 Horizontal Tenon Mount, LED Roadway Fixtures (PlanLED GigaTera META) *(26 56 19 00-0119)*

Note: UL wet listed. Includes 3,000K, 4,000K or 5,000K color temperature, 120-277 voltage, integral 20kV surge suppression, die-cast extruded aluminum housing assembly and powder coat finish. Excludes sensors.

26 56 19 00-0129	EA	13,000 Lumens, 100 Watt, Horizontal Tenon Mount, LED Roadway Fixture (PlanLED GigaTera META MT100)	1,041.35	148.39
		For 0 To 10 Volt Dimming, Add	*96.89*	
		For 480 Volt, Add	*96.89*	
		For >50 To 100, Deduct	*-52.07*	
		For >100 To 250, Deduct	*-78.10*	
		For >250 To 500, Deduct	*-122.75*	
		For >500 To 1,000, Deduct	*-167.40*	
		For >1,000, Deduct	*-212.05*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 19 00-0130	EA	16,900 Lumens, 130 Watt, Horizontal Tenon Mount, LED Roadway Fixture (PlanLED GigaTera META MT130)	1,160.55	149.68
		For 0 To 10 Volt Dimming, Add	*96.89*	
		For 480 Volt, Add	*29.25*	
		For >50 To 100, Deduct	*-58.03*	
		For >100 To 250, Deduct	*-87.04*	
		For >250 To 500, Deduct	*-137.58*	
		For >500 To 1,000, Deduct	*-188.13*	
		For >1,000, Deduct	*-238.67*	
26 56 19 00-0131	EA	19,500 Lumens, 150 Watt, Horizontal Tenon Mount, LED Roadway Fixture (PlanLED GigaTera META MT150)	1,252.84	150.97
		For 0 To 10 Volt Dimming, Add	*96.89*	
		For 480 Volt, Add	*121.08*	
		For >50 To 100, Deduct	*-62.64*	
		For >100 To 250, Deduct	*-93.96*	
		For >250 To 500, Deduct	*-149.06*	
		For >500 To 1,000, Deduct	*-204.15*	
		For >1,000, Deduct	*-259.24*	

26 56 19 00-0132 LED Roadway Lighting (General Electric) *(26 56 19 00-0058)*

26 56 19 00-0133 Horizontal Tenon Mount, LED Cobra Head Street Lights (General Electric)

(26 56 19 00-0132)

Note: UL wet listed. Includes 4,000K or 5,700K color temperature, 120-480 voltage, die-cast extruded aluminum housing assembly and black or gray powder coat finish. Excludes sensors.

26 56 19 00-0134	EA	2,000 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (General Electric ERL1 0 02XX 40 A GRAY)	612.73	142.59
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For >50 To 100, Deduct	*-30.64*	
		For >100 To 250, Deduct	*-45.95*	
		For >250 To 500, Deduct	*-69.46*	
		For >500 To 1,000, Deduct	*-92.97*	
		For >1,000, Deduct	*-116.48*	
26 56 19 00-0135	EA	3,000 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (General Electric ERL1 0 03XX 40 A GRAY)	616.60	144.52
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For >50 To 100, Deduct	*-30.83*	
		For >100 To 250, Deduct	*-46.25*	
		For >250 To 500, Deduct	*-69.85*	
		For >500 To 1,000, Deduct	*-93.45*	
		For >1,000, Deduct	*-117.06*	
26 56 19 00-0136	EA	4,000 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (General Electric ERL1 0 04XX 40 A GRAY)	643.78	146.78
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For >50 To 100, Deduct	*-32.19*	
		For >100 To 250, Deduct	*-48.28*	
		For >250 To 500, Deduct	*-73.13*	
		For >500 To 1,000, Deduct	*-97.98*	
		For >1,000, Deduct	*-122.83*	
26 56 19 00-0137	EA	5,000 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (General Electric ERL1 0 05XX 40 A GRAY)	671.72	148.39
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For >50 To 100, Deduct	*-33.59*	
		For >100 To 250, Deduct	*-50.38*	
		For >250 To 500, Deduct	*-76.55*	
		For >500 To 1,000, Deduct	*-102.71*	
		For >1,000, Deduct	*-128.88*	
26 56 19 00-0138	EA	7,000 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (General Electric ERL1 0 07XX 40 A GRAY)	746.15	151.62
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For >50 To 100, Deduct	*-37.31*	
		For >100 To 250, Deduct	*-55.96*	
		For >250 To 500, Deduct	*-85.69*	
		For >500 To 1,000, Deduct	*-115.41*	
		For >1,000, Deduct	*-145.14*	
26 56 19 00-0139	EA	8,000 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (General Electric ERL1 0 08XX 40 A GRAY)	785.81	152.90
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For >50 To 100, Deduct	*-39.29*	
		For >100 To 250, Deduct	*-58.94*	
		For >250 To 500, Deduct	*-90.58*	
		For >500 To 1,000, Deduct	*-122.23*	
		For >1,000, Deduct	*-153.87*	
26 56 19 00-0140	EA	9,800 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (General Electric ERL1 0 10XX 40 A GRAY)	860.38	155.17
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For >50 To 100, Deduct	*-43.02*	
		For >100 To 250, Deduct	*-64.53*	
		For >250 To 500, Deduct	*-99.79*	
		For >500 To 1,000, Deduct	*-135.05*	
		For >1,000, Deduct	*-170.31*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 19 00-0141	EA	13,000 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (General Electric ERLH 0 13XX 40 A GRAY)	1,019.15	159.36
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For >50 To 100, Deduct	*-50.96*	
		For >100 To 250, Deduct	*-76.44*	
		For >250 To 500, Deduct	*-119.43*	
		For >500 To 1,000, Deduct	*-162.42*	
		For >1,000, Deduct	*-205.40*	
26 56 19 00-0142	EA	19,000 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (General Electric ERL2 0 19XX 40 A GRAY)	1,200.73	167.75
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For >50 To 100, Deduct	*-60.04*	
		For >100 To 250, Deduct	*-90.05*	
		For >250 To 500, Deduct	*-141.70*	
		For >500 To 1,000, Deduct	*-193.35*	
		For >1,000, Deduct	*-245.00*	

26 56 19 00-0143 Horizontal Tenon Mount, LED Cobra Head Street Lights With Wireless Control Node (General Electric) *(26 56 19 00-0132)*

Note: UL wet listed. Includes 4,000K color temperature, 120-277 voltage, die-cast extruded aluminum housing assembly and powder coat finish. Includes a General Electric LightGrid™ outdoor wireless control system node.

26 56 19 00-0144	EA	3,500 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light With Wireless Control Node (General Electric ERL105B140AGRAY DELWN0A5UG5)	872.33	29.04
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*38.71*	
		For >50 To 100, Deduct	*-43.62*	
		For >100 To 250, Deduct	*-65.42*	
		For >250 To 500, Deduct	*-105.82*	
		For >500 To 1,000, Deduct	*-146.21*	
		For >1,000, Deduct	*-186.60*	
		For Up To 1,000, Add	*74.33*	
26 56 19 00-0145	EA	6,800 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light With Wireless Control Node (General Electric ERL1007B140AGRAY ELWN0A5UG5)	910.78	29.04
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*38.71*	
		For >50 To 100, Deduct	*-45.54*	
		For >100 To 250, Deduct	*-68.31*	
		For >250 To 500, Deduct	*-110.62*	
		For >500 To 1,000, Deduct	*-152.93*	
		For >1,000, Deduct	*-195.25*	
		For Up To 1,000, Add	*78.17*	
26 56 19 00-0146	EA	11,600 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light With Wireless Control Node (General Electric ERS1011C1X40AGRAY ELWN0A5UG5)	1,205.53	29.04
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*38.71*	
		For >50 To 100, Deduct	*-60.28*	
		For >100 To 250, Deduct	*-90.41*	
		For >250 To 500, Deduct	*-147.47*	
		For >500 To 1,000, Deduct	*-204.52*	
		For >1,000, Deduct	*-261.57*	
		For Up To 1,000, Add	*107.65*	
26 56 19 00-0147	EA	3,500 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light With Wireless Control Node (General Electric ERL1004B140ADKBZ ELWN0A5UG5 RPA-EAMT1DKBZ)	1,038.93	29.04
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*38.71*	
		For >50 To 100, Deduct	*-51.95*	
		For >100 To 250, Deduct	*-77.92*	
		For >250 To 500, Deduct	*-126.64*	
		For >500 To 1,000, Deduct	*-175.36*	
		For >1,000, Deduct	*-224.08*	
		For Up To 1,000, Add	*90.99*	
26 56 19 00-0148	EA	11,500 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light With Wireless Control Node (General Electric ERS1011E1X40DKBZ ELWN0A5UG5 RPA-EAMT1DKBZ)	1,410.58	29.04
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*38.71*	
		For >50 To 100, Deduct	*-70.53*	
		For >100 To 250, Deduct	*-105.79*	
		For >250 To 500, Deduct	*-173.10*	
		For >500 To 1,000, Deduct	*-240.40*	
		For >1,000, Deduct	*-307.70*	
		For Up To 1,000, Add	*128.15*	
26 56 19 00-0149	EA	16,000 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light With Wireless Control Node (General Electric ERS2016E1X40NDKBZ ELWN0A5UG5 RPA-EAMT1DKBZ)	1,677.57	29.04
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*38.71*	
		For >50 To 100, Deduct	*-83.88*	
		For >100 To 250, Deduct	*-125.82*	
		For >250 To 500, Deduct	*-206.47*	
		For >500 To 1,000, Deduct	*-287.12*	
		For >1,000, Deduct	*-367.78*	
		For Up To 1,000, Add	*154.85*	

26 56 19 00-0150 LED Roadway Lighting (Acuity AEL Autobahn) *(26 56 19 00-0058)*

26 56 19 00-0151 Horizontal Tenon Mount, LED Cobra Head Street Lights (Acuity AEL Autobahn) *(26 56 19 00-0150)*

Note: UL wet listed. Includes 4,000K or 5,000K color temperature, 120-480 voltage, integral 10kV surge suppression, 0-10V dimming, die-cast extruded aluminum housing assembly and white, black, gray, graphite or bronze powder coat finish. Excludes sensors.

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 19 00-0152	EA	4,200 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Acuity AEL Autobahn ATB0 20ALEDE70)	1,226.56	146.78
		For >50 To 100, Deduct	*-61.33*	
		For >100 To 250, Deduct	*-91.99*	
		For >250 To 500, Deduct	*-145.98*	
		For >500 To 1,000, Deduct	*-199.97*	
		For >1,000, Deduct	*-253.96*	
26 56 19 00-0153	EA	6,700 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Acuity AEL Autobahn ATB0 30BLEDE70)	1,534.14	150.97
		For >50 To 100, Deduct	*-76.71*	
		For >100 To 250, Deduct	*-115.06*	
		For >250 To 500, Deduct	*-184.22*	
		For >500 To 1,000, Deduct	*-253.38*	
		For >1,000, Deduct	*-322.54*	
26 56 19 00-0154	EA	9,000 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Acuity AEL Autobahn ATB2 40BLEDE70)	2,158.78	155.17
		For >50 To 100, Deduct	*-107.94*	
		For >100 To 250, Deduct	*-161.91*	
		For >250 To 500, Deduct	*-262.09*	
		For >500 To 1,000, Deduct	*-362.27*	
		For >1,000, Deduct	*-462.45*	
26 56 19 00-0155	EA	13,500 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Acuity AEL Autobahn ATB2 60BLEDE70)	2,787.12	161.29
		For >50 To 100, Deduct	*-139.36*	
		For >100 To 250, Deduct	*-209.03*	
		For >250 To 500, Deduct	*-340.33*	
		For >500 To 1,000, Deduct	*-471.62*	
		For >1,000, Deduct	*-602.91*	
26 56 19 00-0156	EA	17,800 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Acuity AEL Autobahn ATB2 80BLEDE70)	3,401.73	165.81
		For >50 To 100, Deduct	*-170.09*	
		For >100 To 250, Deduct	*-255.13*	
		For >250 To 500, Deduct	*-416.93*	
		For >500 To 1,000, Deduct	*-578.72*	
		For >1,000, Deduct	*-740.52*	

26 56 19 00-0157 LED Roadway Lighting (Leotek) *(26 56 19 00-0058)*

26 56 19 00-0158 Horizontal Tenon Mount, LED Cobra Head Street Lights (Leotek) *(26 56 19 00-0157)*

Note: UL wet listed. Includes 4,000K color temperature, 120-277 voltage, integral surge protector, die-cast and extruded aluminum housing assembly and gray powder coat finish. Excludes sensors.

26 56 19 00-0159	EA	Up To 3,900 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Leotek® EC1-4M2-MV-NW-X-GY-XXX-WL)	626.68	146.78
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For Twist Lock Shorting Cap, Add	*10.30*	
		For ANSI 7-wire Photocontrol Receptacle, Add	*30.90*	
		For Ripley Long-Life Twist Lock Photocontrol, Add	*55.29*	
		For >50 To 100, Deduct	*-31.33*	
		For >100 To 250, Deduct	*-47.00*	
		For >250 To 500, Deduct	*-71.00*	
		For >500 To 1,000, Deduct	*-94.99*	
		For >1,000, Deduct	*-118.99*	
26 56 19 00-0160	EA	Up To 5,150 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Leotek® EC1-4M2-MV-NW-X-GY-1AMP-WL)	640.71	148.39
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For Twist Lock Shorting Cap, Add	*10.30*	
		For ANSI 7-wire Photocontrol Receptacle, Add	*30.90*	
		For Ripley Long-Life Twist Lock Photocontrol, Add	*55.29*	
		For >50 To 100, Deduct	*-32.04*	
		For >100 To 250, Deduct	*-48.05*	
		For >250 To 500, Deduct	*-72.67*	
		For >500 To 1,000, Deduct	*-97.29*	
		For >1,000, Deduct	*-121.90*	
26 56 19 00-0161	EA	Up To 5,950 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Leotek® EC1-6M2-MV-NW-X-GY-XXX-WL)	685.92	149.36
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For Twist Lock Shorting Cap, Add	*10.30*	
		For ANSI 7-wire Photocontrol Receptacle, Add	*30.90*	
		For Ripley Long-Life Twist Lock Photocontrol, Add	*55.29*	
		For >50 To 100, Deduct	*-34.30*	
		For >100 To 250, Deduct	*-51.44*	
		For >250 To 500, Deduct	*-78.27*	
		For >500 To 1,000, Deduct	*-105.10*	
		For >1,000, Deduct	*-131.93*	
26 56 19 00-0162	EA	Up To 9,550 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Leotek® EC3-10M2-MV-NW-X-GY-XXX-WL)	801.35	155.17
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For Twist Lock Shorting Cap, Add	*10.30*	
		For ANSI 7-wire Photocontrol Receptacle, Add	*30.90*	
		For Ripley Long-Life Twist Lock Photocontrol, Add	*55.29*	
		For >50 To 100, Deduct	*-40.07*	
		For >100 To 250, Deduct	*-60.10*	
		For >250 To 500, Deduct	*-92.41*	
		For >500 To 1,000, Deduct	*-124.72*	
		For >1,000, Deduct	*-157.03*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 19 00-0163	EA	Up To 11,450 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Leotek® EC4-12M2-MV-NW-X-GY-XXX-WL)	943.86	159.36
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For Twist Lock Shorting Cap, Add	*10.30*	
		For ANSI 7-wire Photocontrol Receptacle, Add	*30.90*	
		For Ripley Long-Life Twist Lock Photocontrol, Add	*55.29*	
		For >50 To 100, Deduct	*-47.19*	
		For >100 To 250, Deduct	*-70.79*	
		For >250 To 500, Deduct	*-110.01*	
		For >500 To 1,000, Deduct	*-149.24*	
		For >1,000, Deduct	*-188.46*	
26 56 19 00-0164	EA	Up To 14,550 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Leotek® EC4-15M2-MV-NW-X-GY-XXX-WL)	949.02	161.94
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For Twist Lock Shorting Cap, Add	*10.30*	
		For ANSI 7-wire Photocontrol Receptacle, Add	*30.90*	
		For Ripley Long-Life Twist Lock Photocontrol, Add	*55.29*	
		For >50 To 100, Deduct	*-47.45*	
		For >100 To 250, Deduct	*-71.18*	
		For >250 To 500, Deduct	*-110.53*	
		For >500 To 1,000, Deduct	*-149.88*	
		For >1,000, Deduct	*-189.24*	
26 56 19 00-0165	EA	Up To 16,900 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Leotek® EC7-18M2-MV-NW-X-GY-XXX-WL)	1,172.65	164.52
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For Twist Lock Shorting Cap, Add	*10.30*	
		For ANSI 7-wire Photocontrol Receptacle, Add	*30.90*	
		For Ripley Long-Life Twist Lock Photocontrol, Add	*55.29*	
		For >50 To 100, Deduct	*-58.63*	
		For >100 To 250, Deduct	*-87.95*	
		For >250 To 500, Deduct	*-138.36*	
		For >500 To 1,000, Deduct	*-188.76*	
		For >1,000, Deduct	*-239.17*	
26 56 19 00-0166	EA	Up To 18,750 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Leotek® EC7-20M2-MV-NW-X-GY-XXX-WL)	1,231.02	167.75
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For Twist Lock Shorting Cap, Add	*10.30*	
		For ANSI 7-wire Photocontrol Receptacle, Add	*30.90*	
		For Ripley Long-Life Twist Lock Photocontrol, Add	*55.29*	
		For >50 To 100, Deduct	*-61.55*	
		For >100 To 250, Deduct	*-92.33*	
		For >250 To 500, Deduct	*-145.49*	
		For >500 To 1,000, Deduct	*-198.65*	
		For >1,000, Deduct	*-251.82*	
26 56 19 00-0167	EA	Up To 22,700 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Leotek® EC7-24M2-MV-NW-X-GY-XXX-WL)	1,378.94	170.33
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For Twist Lock Shorting Cap, Add	*10.30*	
		For ANSI 7-wire Photocontrol Receptacle, Add	*30.90*	
		For Ripley Long-Life Twist Lock Photocontrol, Add	*55.29*	
		For >50 To 100, Deduct	*-68.95*	
		For >100 To 250, Deduct	*-103.42*	
		For >250 To 500, Deduct	*-163.85*	
		For >500 To 1,000, Deduct	*-224.28*	
		For >1,000, Deduct	*-284.71*	
26 56 19 00-0168	EA	Up To 29,150 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Leotek® EC9-30M2-MV-NW-X-GY-XXX-WL)	1,481.44	172.91
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For Twist Lock Shorting Cap, Add	*10.30*	
		For ANSI 7-wire Photocontrol Receptacle, Add	*30.90*	
		For Ripley Long-Life Twist Lock Photocontrol, Add	*55.29*	
		For >50 To 100, Deduct	*-74.07*	
		For >100 To 250, Deduct	*-111.11*	
		For >250 To 500, Deduct	*-176.53*	
		For >500 To 1,000, Deduct	*-241.96*	
		For >1,000, Deduct	*-307.39*	
26 56 19 00-0169	EA	Up To 4,800 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Leotek GC1-20F-MV-NW-X-GY-XXX-WL)	731.56	148.39
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For Twist Lock Shorting Cap, Add	*10.30*	
		For ANSI 7-wire Photocontrol Receptacle, Add	*30.90*	
		For Ripley Long-Life Twist Lock Photocontrol, Add	*55.29*	
		For >50 To 100, Deduct	*-36.58*	
		For >100 To 250, Deduct	*-54.87*	
		For >250 To 500, Deduct	*-84.03*	
		For >500 To 1,000, Deduct	*-113.18*	
		For >1,000, Deduct	*-142.34*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 19 00-0170	EA	Up To 7,000 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Leotek GC1-30F-MV-NW-X-GY-XXX-WL)	806.36	152.26
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For Twist Lock Shorting Cap, Add	*10.30*	
		For ANSI 7-wire Photocontrol Receptacle, Add	*30.90*	
		For Ripley Long-Life Twist Lock Photocontrol, Add	*55.29*	
		For >50 To 100, Deduct	*-40.32*	
		For >100 To 250, Deduct	*-60.48*	
		For >250 To 500, Deduct	*-93.18*	
		For >500 To 1,000, Deduct	*-125.89*	
		For >1,000, Deduct	*-158.59*	
26 56 19 00-0171	EA	Up To 9,300 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Leotek GC1-40F-MV-NW-X-GY-XXX-WL)	872.74	155.17
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For Twist Lock Shorting Cap, Add	*10.30*	
		For ANSI 7-wire Photocontrol Receptacle, Add	*30.90*	
		For Ripley Long-Life Twist Lock Photocontrol, Add	*55.29*	
		For >50 To 100, Deduct	*-43.64*	
		For >100 To 250, Deduct	*-65.46*	
		For >250 To 500, Deduct	*-101.33*	
		For >500 To 1,000, Deduct	*-137.21*	
		For >1,000, Deduct	*-173.09*	
26 56 19 00-0172	EA	Up To 12,300 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Leotek GC1-40F-MV-NW-X-GY-1AMP-WL)	929.58	158.71
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For Twist Lock Shorting Cap, Add	*10.30*	
		For ANSI 7-wire Photocontrol Receptacle, Add	*30.90*	
		For Ripley Long-Life Twist Lock Photocontrol, Add	*55.29*	
		For >50 To 100, Deduct	*-46.48*	
		For >100 To 250, Deduct	*-69.72*	
		For >250 To 500, Deduct	*-108.26*	
		For >500 To 1,000, Deduct	*-146.81*	
		For >1,000, Deduct	*-185.35*	
26 56 19 00-0173	EA	Up To 13,400 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Leotek GC1-60F-MV-NW-X-GY-XXX-WL)	988.40	160.01
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For Twist Lock Shorting Cap, Add	*10.30*	
		For ANSI 7-wire Photocontrol Receptacle, Add	*30.90*	
		For Ripley Long-Life Twist Lock Photocontrol, Add	*55.29*	
		For >50 To 100, Deduct	*-49.42*	
		For >100 To 250, Deduct	*-74.13*	
		For >250 To 500, Deduct	*-115.55*	
		For >500 To 1,000, Deduct	*-156.97*	
		For >1,000, Deduct	*-198.39*	
26 56 19 00-0174	EA	Up To 17,700 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Leotek GC1-80F-MV-NW-X-GY-XXX-WL)	1,183.88	165.81
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For Twist Lock Shorting Cap, Add	*10.30*	
		For ANSI 7-wire Photocontrol Receptacle, Add	*30.90*	
		For Ripley Long-Life Twist Lock Photocontrol, Add	*55.29*	
		For >50 To 100, Deduct	*-59.19*	
		For >100 To 250, Deduct	*-88.79*	
		For >250 To 500, Deduct	*-139.69*	
		For >500 To 1,000, Deduct	*-190.60*	
		For >1,000, Deduct	*-241.50*	
26 56 19 00-0175	EA	Up To 19,800 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Leotek GC2-90F-MV-NW-X-GY-XXX-WL)	1,343.91	169.03
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For Twist Lock Shorting Cap, Add	*10.30*	
		For ANSI 7-wire Photocontrol Receptacle, Add	*30.90*	
		For Ripley Long-Life Twist Lock Photocontrol, Add	*55.29*	
		For >50 To 100, Deduct	*-67.20*	
		For >100 To 250, Deduct	*-100.79*	
		For >250 To 500, Deduct	*-159.54*	
		For >500 To 1,000, Deduct	*-218.28*	
		For >1,000, Deduct	*-277.02*	
26 56 19 00-0176	EA	Up To 22,000 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Leotek GC2-100F-MV-NW-X-GY-XXX-WL)	1,431.73	169.68
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For Twist Lock Shorting Cap, Add	*10.30*	
		For ANSI 7-wire Photocontrol Receptacle, Add	*30.90*	
		For Ripley Long-Life Twist Lock Photocontrol, Add	*55.29*	
		For >50 To 100, Deduct	*-71.59*	
		For >100 To 250, Deduct	*-107.38*	
		For >250 To 500, Deduct	*-170.48*	
		For >500 To 1,000, Deduct	*-233.58*	
		For >1,000, Deduct	*-296.69*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 19 00-0177	EA	Up To 26,400 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Leotek GC2-120F-MV-NW-X-GY-XXX-WL)	1,515.63	171.62
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For Twist Lock Shorting Cap, Add	*10.30*	
		For ANSI 7-wire Photocontrol Receptacle, Add	*30.90*	
		For Ripley Long-Life Twist Lock Photocontrol, Add	*55.29*	
		For >50 To 100, Deduct	*-75.78*	
		For >100 To 250, Deduct	*-113.67*	
		For >250 To 500, Deduct	*-180.87*	
		For >500 To 1,000, Deduct	*-248.07*	
		For >1,000, Deduct	*-315.27*	
26 56 19 00-0178	EA	Up To 11,720 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Leotek® GCM2-30H-MV-NW-X-GY-1AMP)	784.62	161.94
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For Twist Lock Shorting Cap, Add	*10.30*	
		For ANSI 7-wire Photocontrol Receptacle, Add	*30.90*	
		For Ripley Long-Life Twist Lock Photocontrol, Add	*55.29*	
		For >50 To 100, Deduct	*-39.23*	
		For >100 To 250, Deduct	*-58.85*	
		For >250 To 500, Deduct	*-89.98*	
		For >500 To 1,000, Deduct	*-121.11*	
		For >1,000, Deduct	*-152.25*	
26 56 19 00-0179	EA	Up To 15,430 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Leotek® GCM2-40H-MV-NW-X-GY-1AMP)	852.73	163.55
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For Twist Lock Shorting Cap, Add	*10.30*	
		For ANSI 7-wire Photocontrol Receptacle, Add	*30.90*	
		For Ripley Long-Life Twist Lock Photocontrol, Add	*55.29*	
		For >50 To 100, Deduct	*-42.64*	
		For >100 To 250, Deduct	*-63.95*	
		For >250 To 500, Deduct	*-98.41*	
		For >500 To 1,000, Deduct	*-132.87*	
		For >1,000, Deduct	*-167.33*	
26 56 19 00-0180	EA	Up To 4,180 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Leotek® GCJ0-15H-MV-NW-X-GY-XXX-WL)	596.81	148.06
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For Twist Lock Shorting Cap, Add	*10.30*	
		For ANSI 7-wire Photocontrol Receptacle, Add	*30.90*	
		For Ripley Long-Life Twist Lock Photocontrol, Add	*55.29*	
		For >50 To 100, Deduct	*-29.84*	
		For >100 To 250, Deduct	*-44.76*	
		For >250 To 500, Deduct	*-67.20*	
		For >500 To 1,000, Deduct	*-89.63*	
		For >1,000, Deduct	*-112.07*	
26 56 19 00-0181	EA	Up To 5,510 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Leotek® GCJ1-20H-MV-NW-X-GY-XXX-WL)	608.04	149.36
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For Twist Lock Shorting Cap, Add	*10.30*	
		For ANSI 7-wire Photocontrol Receptacle, Add	*30.90*	
		For Ripley Long-Life Twist Lock Photocontrol, Add	*55.29*	
		For >50 To 100, Deduct	*-30.40*	
		For >100 To 250, Deduct	*-45.60*	
		For >250 To 500, Deduct	*-68.54*	
		For >500 To 1,000, Deduct	*-91.47*	
		For >1,000, Deduct	*-114.41*	
26 56 19 00-0182	EA	Up To 7,430 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Leotek® GCJ2-20H-MV-NW-X-GY-1AMP-WL)	663.60	152.26
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For Twist Lock Shorting Cap, Add	*10.30*	
		For ANSI 7-wire Photocontrol Receptacle, Add	*30.90*	
		For Ripley Long-Life Twist Lock Photocontrol, Add	*55.29*	
		For >50 To 100, Deduct	*-33.18*	
		For >100 To 250, Deduct	*-49.77*	
		For >250 To 500, Deduct	*-75.34*	
		For >500 To 1,000, Deduct	*-100.90*	
		For >1,000, Deduct	*-126.47*	
26 56 19 00-0183	EA	Up To 16,400 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Leotek® GCL1-60G-MV-NW-X-GY-XXX-WL)	1,040.70	164.52
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For Twist Lock Shorting Cap, Add	*10.30*	
		For ANSI 7-wire Photocontrol Receptacle, Add	*30.90*	
		For Ripley Long-Life Twist Lock Photocontrol, Add	*55.29*	
		For >50 To 100, Deduct	*-52.04*	
		For >100 To 250, Deduct	*-78.05*	
		For >250 To 500, Deduct	*-121.86*	
		For >500 To 1,000, Deduct	*-165.67*	
		For >1,000, Deduct	*-209.48*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 19 00-0184	EA	Up To 22,100 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Leotek® GCL1-80G-MV-NW-X-GY-XXX-WL)	1,371.16	169.68
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For Twist Lock Shorting Cap, Add	*10.30*	
		For ANSI 7-wire Photocontrol Receptacle, Add	*30.90*	
		For Ripley Long-Life Twist Lock Photocontrol, Add	*55.29*	
		For >50 To 100, Deduct	*-68.56*	
		For >100 To 250, Deduct	*-102.84*	
		For >250 To 500, Deduct	*-162.91*	
		For >500 To 1,000, Deduct	*-222.99*	
		For >1,000, Deduct	*-283.06*	
26 56 19 00-0185	EA	Up To 22,900 Lumens, Horizontal Tenon Mount, LED Cobra Head Street Light (Leotek® GCL2-60G-MV-NW-X-GY-1AMP-WL)	1,216.71	170.33
		For LightGrid™ Wireless Outdoor Controller, Add	*20.00*	
		For Twist Lock Shorting Cap, Add	*10.30*	
		For ANSI 7-wire Photocontrol Receptacle, Add	*30.90*	
		For Ripley Long-Life Twist Lock Photocontrol, Add	*55.29*	
		For >50 To 100, Deduct	*-60.84*	
		For >100 To 250, Deduct	*-91.25*	
		For >250 To 500, Deduct	*-143.57*	
		For >500 To 1,000, Deduct	*-195.89*	
		For >1,000, Deduct	*-248.21*	
26 56 19 00-0186	EA	Up To 5,484 Lumens, Horizontal Tenon Mount, LED Security Light (Leotek® SafeGuard™ SG1-01-MV-NW-5-GY)	571.49	148.39
		For Twist Lock Shorting Cap, Add	*10.30*	
		For ANSI 7-wire Photocontrol Receptacle, Add	*30.90*	
		For Ripley Long-Life Twist Lock Photocontrol, Add	*55.29*	
		For >50 To 100, Deduct	*-28.57*	
		For >100 To 250, Deduct	*-42.86*	
		For >250 To 500, Deduct	*-64.02*	
		For >500 To 1,000, Deduct	*-85.17*	
		For >1,000, Deduct	*-106.33*	

26 56 19 00-0187 LED, Area Fixtures *(26 56 19)*

26 56 19 00-0188 Pole Mount, LED Area Fixtures *(26 56 19 00-0187)*

26 56 19 00-0189 Pole Mount, Rectangular, LED Architectural Area Fixtures (Lithonia DSX) *(26 56 19 00-0188)*

Note: UL wet listed. Includes 4,000K color temperature, 480 voltage, 700mA remote driver, die-cast extruded aluminum housing assembly and white, black, aluminum or bronze powder coat finish. Excludes sensors.

26 56 19 00-0190	EA	20 LEDs, 49 Watt, Pole Mount, LED Architectural Area Fixture (Lithonia DSXO LED)	2,478.66	109.68
		For >50 To 100, Deduct	*-123.93*	
		For >100 To 250, Deduct	*-185.90*	
		For >250 To 500, Deduct	*-304.35*	
		For >500 To 1,000, Deduct	*-422.80*	
		For >1,000, Deduct	*-541.25*	
26 56 19 00-0191	EA	40 LEDs, 89 Watt, Pole Mount, LED Architectural Area Fixture (Lithonia DSXO LED)	2,672.31	116.13
		For >50 To 100, Deduct	*-133.62*	
		For >100 To 250, Deduct	*-200.42*	
		For >250 To 500, Deduct	*-328.23*	
		For >500 To 1,000, Deduct	*-456.04*	
		For >1,000, Deduct	*-583.85*	
26 56 19 00-0192	EA	80 LEDs, 188 Watt, Pole Mount, LED Architectural Area Fixture (Lithonia DSX2 LED)	2,878.86	129.04
		For >50 To 100, Deduct	*-143.94*	
		For >100 To 250, Deduct	*-215.91*	
		For >250 To 500, Deduct	*-353.41*	
		For >500 To 1,000, Deduct	*-490.90*	
		For >1,000, Deduct	*-628.39*	
26 56 19 00-0193	EA	100 LEDs, 218 Watt, Pole Mount, LED Architectural Area Fixture (Lithonia DSX2 LED)	2,891.77	135.48
		For >50 To 100, Deduct	*-144.59*	
		For >100 To 250, Deduct	*-216.88*	
		For >250 To 500, Deduct	*-354.70*	
		For >500 To 1,000, Deduct	*-492.51*	
		For >1,000, Deduct	*-630.32*	

26 56 19 00-0194 Arm Mount, Rectangular, LED Area Fixtures (CREE® BetaLED® Edge® ARE-EDG) *(26 56 19 00-0188)*

Note: UL wet listed. Includes 4,000K or 5,700K color temperature, 120/277 voltage, 350mA driver, die-cast extruded aluminum housing assembly and white, black, silver or bronze powder coat finish. Includes Type III Medium optic. Excludes sensors. All fixtures without the backlight control shield are DLC qualified

26 56 19 00-0195	EA	40 LEDs, 47 Watt, Arm Mount, Rectangular, LED Area Fixture (CREE® BetaLED® Edge® ARE-EDG)	1,193.46	116.13
		For Backlight Shielding, Add	*21.99*	
		For Type II Medium Optic, Add	*38.01*	
		For 480 Volt, Add	*113.84*	
		For Multi-Level Drive Currents, Add	*219.88*	
		For >50 To 100, Deduct	*-59.67*	
		For >100 To 250, Deduct	*-89.51*	
		For >250 To 500, Deduct	*-143.38*	
		For >500 To 1,000, Deduct	*-197.24*	
		For >1,000, Deduct	*-251.11*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 19 00-0196	EA	60 LEDs, 68 Watt, Arm Mount, Rectangular, LED Area Fixture (CREE® BetaLED® Edge® ARE-EDG)	1,437.25	122.58
		For Backlight Shielding, Add	*21.99*	
		For Type II Medium Optic, Add	*38.66*	
		For 480 Volt, Add	*113.84*	
		For Multi-Level Drive Currents, Add	*219.88*	
		For >50 To 100, Deduct	*-71.86*	
		For >100 To 250, Deduct	*-107.79*	
		For >250 To 500, Deduct	*-173.53*	
		For >500 To 1,000, Deduct	*-239.26*	
		For >1,000, Deduct	*-304.99*	
26 56 19 00-0197	EA	80 LEDs, 90 Watt, Arm Mount, Rectangular, LED Area Fixture (CREE® BetaLED® Edge® ARE-EDG)	1,773.69	129.04
		For Backlight Shielding, Add	*21.99*	
		For Type II Medium Optic, Add	*39.30*	
		For 480 Volt, Add	*113.84*	
		For Multi-Level Drive Currents, Add	*219.88*	
		For >50 To 100, Deduct	*-88.68*	
		For >100 To 250, Deduct	*-133.03*	
		For >250 To 500, Deduct	*-215.26*	
		For >500 To 1,000, Deduct	*-297.49*	
		For >1,000, Deduct	*-379.73*	
26 56 19 00-0198	EA	100 LEDs, 111 Watt, Arm Mount, Rectangular, LED Area Fixture (CREE® BetaLED® Edge® ARE-EDG)	2,017.48	135.48
		For Backlight Shielding, Add	*21.99*	
		For Type II Medium Optic, Add	*39.95*	
		For 480 Volt, Add	*113.84*	
		For Multi-Level Drive Currents, Add	*219.88*	
		For >50 To 100, Deduct	*-100.87*	
		For >100 To 250, Deduct	*-151.31*	
		For >250 To 500, Deduct	*-245.41*	
		For >500 To 1,000, Deduct	*-339.51*	
		For >1,000, Deduct	*-433.61*	
26 56 19 00-0199	EA	120 LEDs, 132 Watt, Arm Mount, Rectangular, LED Area Fixture (CREE® BetaLED® Edge® ARE-EDG)	2,261.25	141.94
		For Backlight Shielding, Add	*21.99*	
		For Type II Medium Optic, Add	*40.59*	
		For 480 Volt, Add	*113.84*	
		For Multi-Level Drive Currents, Add	*219.88*	
		For >50 To 100, Deduct	*-113.06*	
		For >100 To 250, Deduct	*-169.59*	
		For >250 To 500, Deduct	*-275.56*	
		For >500 To 1,000, Deduct	*-381.52*	
		For >1,000, Deduct	*-487.49*	
26 56 19 00-0200	EA	140 LEDs, 157 Watt, Arm Mount, Rectangular, LED Area Fixture (CREE® BetaLED® Edge® ARE-EDG)	2,578.85	148.39
		For Backlight Shielding, Add	*21.99*	
		For Type II Medium Optic, Add	*41.24*	
		For 480 Volt, Add	*113.84*	
		For Multi-Level Drive Currents, Add	*219.88*	
		For >50 To 100, Deduct	*-128.94*	
		For >100 To 250, Deduct	*-193.41*	
		For >250 To 500, Deduct	*-314.94*	
		For >500 To 1,000, Deduct	*-436.46*	
		For >1,000, Deduct	*-557.98*	
26 56 19 00-0201	EA	160 LEDs, 179 Watt, Arm Mount, Rectangular, LED Area Fixture (CREE® BetaLED® Edge® ARE-EDG)	2,822.62	154.84
		For Backlight Shielding, Add	*21.99*	
		For Type II Medium Optic, Add	*41.88*	
		For 480 Volt, Add	*113.84*	
		For Multi-Level Drive Currents, Add	*219.88*	
		For >50 To 100, Deduct	*-141.13*	
		For >100 To 250, Deduct	*-211.70*	
		For >250 To 500, Deduct	*-345.09*	
		For >500 To 1,000, Deduct	*-478.47*	
		For >1,000, Deduct	*-611.86*	

26 56 19 00-0202 Direct Or Arm Mount, Rectangular, High Output, LED Area Fixtures (CREE® BetaLED® Edge® ARE-EHO) *(26 56 19 00-0188)*

Note: UL wet listed. Includes 5,700K color temperature, 120/277 voltage, 700mA driver, die-cast extruded aluminum housing assembly and white, black, silver or bronze powder coat finish. Excludes sensors.

26 56 19 00-0203	EA	120 LEDs, 267 System Watts, Direct Or Arm Mount, Rectangular, High Output, LED Area Fixture (CREE® BetaLED® Edge® ARE-EHO)	2,090.78	141.94
		For 3 Or 7-Pin NEMA Photocell Receptacle, Add	*18.52*	
		For Bird Spikes, Add	*43.37*	
		For 5,000K Color Temperature, Add	*46.31*	
		For Fuse, Add	*55.57*	
		For 0 To 10 Volt Dimming, Add	*55.57*	
		For 480 Volt, Add	*83.36*	
		For Multi-Level, Add	*120.40*	
		For 1,000mA Driver, Add	*155.61*	
		For >50 To 100, Deduct	*-104.54*	
		For >100 To 250, Deduct	*-156.81*	
		For >250 To 500, Deduct	*-254.25*	
		For >500 To 1,000, Deduct	*-351.69*	
		For >1,000, Deduct	*-449.13*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 19 00-0204	EA	240 LEDs, 533 System Watts, Direct Or Arm Mount, Rectangular, High Output, LED Area Fixture (CREE® BetaLED® Edge® ARE-EHO)	3,516.80	174.20
		For 3 Or 7-Pin NEMA Photocell Receptacle, Add	*18.52*	
		For 5,000K Color Temperature, Add	*46.31*	
		For Fuse, Add	*55.57*	
		For 0 To 10 Volt Dimming, Add	*55.57*	
		For Bird Spikes, Add	*64.11*	
		For Multi-Level, Add	*120.40*	
		For 1,000mA Driver, Add	*155.60*	
		For 480 Volt, Add	*166.71*	
		For >50 To 100, Deduct	*-175.84*	
		For >100 To 250, Deduct	*-263.76*	
		For >250 To 500, Deduct	*-430.89*	
		For >500 To 1,000, Deduct	*-598.02*	
		For >1,000, Deduct	*-765.15*	

26 56 19 00-0205 Arm Mount, Rectangular, LED Area Fixtures (General Electric Evolve™) *(26 56 19 00-0188)*

Note: UL wet listed. Includes 4,000K color temperature, 120/277 voltage, 525mA driver, die-cast extruded aluminum housing assembly and powder coat finish. Excludes sensors.

26 56 19 00-0206	EA	3,730 Lumens, 46 Watt, Arm Mount, Rectangular, LED Area Fixture (General Electric EANA 0 A4 5 40 A A DKBZ)	1,433.70	116.13
		For >50 To 100, Deduct	*-71.69*	
		For >100 To 250, Deduct	*-107.53*	
		For >250 To 500, Deduct	*-173.41*	
		For >500 To 1,000, Deduct	*-239.28*	
		For >1,000, Deduct	*-305.16*	
26 56 19 00-0207	EA	5,510 Lumens, 65 Watt, Arm Mount, Rectangular, LED Area Fixture (General Electric EANA 0 B4 5 40 A A DKBZ)	1,526.71	122.58
		For >50 To 100, Deduct	*-76.34*	
		For >100 To 250, Deduct	*-114.50*	
		For >250 To 500, Deduct	*-184.71*	
		For >500 To 1,000, Deduct	*-254.92*	
		For >1,000, Deduct	*-325.12*	
26 56 19 00-0208	EA	7,180 Lumens, 85 Watt, Arm Mount, Rectangular, LED Area Fixture (General Electric EANA 0 C4 5 40 A A DKBZ)	1,593.01	129.04
		For >50 To 100, Deduct	*-79.65*	
		For >100 To 250, Deduct	*-119.48*	
		For >250 To 500, Deduct	*-192.67*	
		For >500 To 1,000, Deduct	*-265.87*	
		For >1,000, Deduct	*-339.07*	
26 56 19 00-0209	EA	8,810 Lumens, 104 Watt, Arm Mount, Rectangular, LED Area Fixture (General Electric EANA 0 D4 5 40 A A DKBZ)	1,659.32	135.48
		For >50 To 100, Deduct	*-82.97*	
		For >100 To 250, Deduct	*-124.45*	
		For >250 To 500, Deduct	*-200.64*	
		For >500 To 1,000, Deduct	*-276.83*	
		For >1,000, Deduct	*-353.02*	
26 56 19 00-0210	EA	15,400 Lumens, 144 Watt, Arm Mount, Rectangular, LED Area Fixture (General Electric EASC 0 F4 F 5 40 A A DKBZ)	2,272.94	141.94
		For >50 To 100, Deduct	*-113.65*	
		For >100 To 250, Deduct	*-170.47*	
		For >250 To 500, Deduct	*-277.02*	
		For >500 To 1,000, Deduct	*-383.57*	
		For >1,000, Deduct	*-490.12*	

26 56 19 00-0211 Pole Mount, Rectangular, LED Area Fixtures With Wireless Control Node (General Electric) *(26 56 19 00-0188)*

Note: UL wet listed. Includes 4,000K color temperature, 120-277 voltage, die-cast extruded aluminum housing assembly and bronze powder coat finish. Includes a General Electric LightGrid™ outdoor wireless control node.

26 56 19 00-0212	EA	33,000 Lumens, 283 Watt, Pole Mount, Rectangular, LED Area Fixture With Wireless Control Node (General Electric EASC-0-K3-F5-40-AA-DKBZ ELWN0A5UG5)	2,931.34	29.04
		For Personal Protective Equipment (Arc Flash) When Working On Energized Equipment, Add	*38.71*	
		For >50 To 100, Deduct	*-146.57*	
		For >100 To 250, Deduct	*-219.85*	
		For >250 To 500, Deduct	*-363.19*	
		For >500 To 1,000, Deduct	*-506.53*	
		For >1,000, Deduct	*-649.87*	
		For Up To 1,000, Add	*280.23*	

26 56 19 00-0213 Arm Mount, Round, LED Security Area Fixtures (Everlast EL-LED-NW) *(26 56 19 00-0188)*

Note: UL wet listed. Includes 2,700K, 4,000K or 5,000K color temperature, 120/277 voltage, die-cast extruded aluminum housing assembly. Excludes sensors.

26 56 19 00-0214	EA	3,675 Lumens, 35 Watt, Arm Mount, Round, LED Security Area Fixture (Everlast EL-LED-NW)	546.24	116.13
		For >50 To 100, Deduct	*-27.31*	
		For >100 To 250, Deduct	*-40.97*	
		For >250 To 500, Deduct	*-62.47*	
		For >500 To 1,000, Deduct	*-83.98*	
		For >1,000, Deduct	*-105.48*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 19 00-0215	EA	4,480 Lumens, 40 Watt, Arm Mount, Round, LED Security Area Fixture (Everlast EL-LED-NW)	552.97	116.13
		For >50 To 100, Deduct	*-27.65*	
		For >100 To 250, Deduct	*-41.47*	
		For >250 To 500, Deduct	*-63.31*	
		For >500 To 1,000, Deduct	*-85.16*	
		For >1,000, Deduct	*-107.00*	
26 56 19 00-0216	EA	5,040 Lumens, 45 Watt, Arm Mount, Round, LED Security Area Fixture (Everlast EL-LED-NW)	557.45	116.13
		For >50 To 100, Deduct	*-27.87*	
		For >100 To 250, Deduct	*-41.81*	
		For >250 To 500, Deduct	*-63.87*	
		For >500 To 1,000, Deduct	*-85.94*	
		For >1,000, Deduct	*-108.01*	
26 56 19 00-0217	EA	5,050 Lumens, 50 Watt, Arm Mount, Round, LED Security Area Fixture (Everlast EL-LED-NW)	568.66	116.13
		For >50 To 100, Deduct	*-28.43*	
		For >100 To 250, Deduct	*-42.65*	
		For >250 To 500, Deduct	*-65.28*	
		For >500 To 1,000, Deduct	*-87.90*	
		For >1,000, Deduct	*-110.53*	
26 56 19 00-0218	EA	6,565 Lumens, 65 Watt, Arm Mount, Round, LED Security Area Fixture (Everlast EL-LED-NW)	647.16	116.13
		For >50 To 100, Deduct	*-32.36*	
		For >100 To 250, Deduct	*-48.54*	
		For >250 To 500, Deduct	*-75.09*	
		For >500 To 1,000, Deduct	*-101.64*	
		For >1,000, Deduct	*-128.19*	

26 56 19 00-0219 Arm Mount, Round, LED Area Fixtures (Everlast EL-LED-MS) *(26 56 19 00-0188)*

Note: UL wet listed. Includes 2,700K, 4,000K or 5,000K color temperature, 120/277 voltage, die-cast extruded aluminum housing assembly. Excludes sensors.

26 56 19 00-0220	EA	6,300 Lumens, 60 Watt, Arm Mount, Round, LED Area Fixture (Everlast EL-LED-MS)	1,060.95	129.04
		For >50 To 100, Deduct	*-53.05*	
		For >100 To 250, Deduct	*-79.57*	
		For >250 To 500, Deduct	*-126.17*	
		For >500 To 1,000, Deduct	*-172.76*	
		For >1,000, Deduct	*-219.36*	
26 56 19 00-0221	EA	9,500 Lumens, 100 Watt, Arm Mount, Round, LED Area Fixture (Everlast EL-LED-MS)	1,166.36	129.04
		For >50 To 100, Deduct	*-58.32*	
		For >100 To 250, Deduct	*-87.48*	
		For >250 To 500, Deduct	*-139.34*	
		For >500 To 1,000, Deduct	*-191.21*	
		For >1,000, Deduct	*-243.08*	
26 56 19 00-0222	EA	12,450 Lumens, 150 Watt, Arm Mount, Round, LED Area Fixture (Everlast EL-LED-MS)	1,323.35	129.04
		For >50 To 100, Deduct	*-66.17*	
		For >100 To 250, Deduct	*-99.25*	
		For >250 To 500, Deduct	*-158.97*	
		For >500 To 1,000, Deduct	*-218.68*	
		For >1,000, Deduct	*-278.40*	

26 56 19 00-0223 Arm Mount, Rectangular, LED Area Fixtures (Everlast EL-LED-VS) *(26 56 19 00-0188)*

Note: UL wet listed. Includes 3,000K, 4,000K or 5,700K color temperature, 120/277 voltage, die-cast extruded aluminum housing assembly. Excludes sensors.

26 56 19 00-0224	EA	14,000 Lumens, 140 Watt, Arm Mount, Rectangular, LED Area Fixture (Everlast EL-LED-VS)	1,054.23	129.04
		For >50 To 100, Deduct	*-52.71*	
		For >100 To 250, Deduct	*-79.07*	
		For >250 To 500, Deduct	*-125.33*	
		For >500 To 1,000, Deduct	*-171.59*	
		For >1,000, Deduct	*-217.85*	
26 56 19 00-0225	EA	21,000 Lumens, 210 Watt, Arm Mount, Rectangular, LED Area Fixture (Everlast EL-LED-VS)	1,121.51	129.04
		For >50 To 100, Deduct	*-56.08*	
		For >100 To 250, Deduct	*-84.11*	
		For >250 To 500, Deduct	*-133.74*	
		For >500 To 1,000, Deduct	*-183.36*	
		For >1,000, Deduct	*-232.98*	
26 56 19 00-0226	EA	28,000 Lumens, 280 Watt, Arm Mount, Rectangular, LED Area Fixture (Everlast EL-LED-VS)	1,334.56	129.04
		For >50 To 100, Deduct	*-66.73*	
		For >100 To 250, Deduct	*-100.09*	
		For >250 To 500, Deduct	*-160.37*	
		For >500 To 1,000, Deduct	*-220.64*	
		For >1,000, Deduct	*-280.92*	
26 56 19 00-0227	EA	42,000 Lumens, 420 Watt, Arm Mount, Rectangular, LED Area Fixture (Everlast EL-LED-VS)	1,704.61	129.04
		For >50 To 100, Deduct	*-85.23*	
		For >100 To 250, Deduct	*-127.85*	
		For >250 To 500, Deduct	*-206.62*	
		For >500 To 1,000, Deduct	*-285.40*	
		For >1,000, Deduct	*-364.18*	

26 56 19 00-0228 Wall Mount, LED Area Fixtures *(26 56 19 00-0187)*

26 56 19 00-0229 Wall Mount, LED Architectural Area Fixtures (Lithonia DSXW) *(26 56 19 00-0228)*

Note: UL wet listed. Includes 277 voltage, 700mA remote driver, die-cast extruded aluminum housing assembly and white, black, aluminum or bronze powder coat finish. Excludes sensors.

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 19 00-0230	EA	20 LEDs, 47 Watt, 4000K CCT, Wall Mount, LED Architectural Area Fixture (Lithonia DSXW2 LED)	1,088.74	109.68
		For >50 To 100, Deduct	*-54.44*	
		For >100 To 250, Deduct	*-81.66*	
		For >250 To 500, Deduct	*-130.61*	
		For >500 To 1,000, Deduct	*-179.56*	
		For >1,000, Deduct	*-228.51*	
26 56 19 00-0231	EA	30 LEDs, 71 Watt, 4000K CCT, Wall Mount, LED Architectural Area Fixture (Lithonia DSXW2 LED)	1,114.55	122.58
		For >50 To 100, Deduct	*-55.73*	
		For >100 To 250, Deduct	*-83.59*	
		For >250 To 500, Deduct	*-133.19*	
		For >500 To 1,000, Deduct	*-182.79*	
		For >1,000, Deduct	*-232.39*	

26 56 19 00-0232 Surface Mount, LED Parking Structure Fixtures *(26 56 19 00-0187)*

26 56 19 00-0233 Surface Mount, Rectangular, LED Parking Structure Fixtures (CREE® BetaLED® Edge® PKG-EDG) *(26 56 19 00-0232)*

Note: Direct or pendant mount. UL wet listed. Includes 5,700K color temperature, 120-480 voltage, 350mA driver, die-cast extruded aluminum housing assembly and white, black, silver or bronze powder coat finish. Excludes sensors.

26 56 19 00-0234	EA	40 LEDs, 47 Watt, Surface Mount, Rectangular, LED Parking Structure Fixture (CREE® BetaLED® Edge® PKG-EDG)	1,055.25	116.13
		For Multi-Level Drive Currents, Add	*219.88*	
		For >50 To 100, Deduct	*-52.76*	
		For >100 To 250, Deduct	*-79.14*	
		For >250 To 500, Deduct	*-126.10*	
		For >500 To 1,000, Deduct	*-173.06*	
		For >1,000, Deduct	*-220.01*	
26 56 19 00-0235	EA	60 LEDs, 68 Watt, Surface Mount, Rectangular, LED Parking Structure Fixture (CREE® BetaLED® Edge® PKG-EDG)	1,299.04	122.58
		For Multi-Level Drive Currents, Add	*219.88*	
		For >50 To 100, Deduct	*-64.95*	
		For >100 To 250, Deduct	*-97.43*	
		For >250 To 500, Deduct	*-156.25*	
		For >500 To 1,000, Deduct	*-215.07*	
		For >1,000, Deduct	*-273.90*	
26 56 19 00-0236	EA	80 LEDs, 90 Watt, Surface Mount, Rectangular, LED Parking Structure Fixture (CREE® BetaLED® Edge® PKG-EDG)	1,542.81	129.04
		For Multi-Level Drive Currents, Add	*219.88*	
		For >50 To 100, Deduct	*-77.14*	
		For >100 To 250, Deduct	*-115.71*	
		For >250 To 500, Deduct	*-186.40*	
		For >500 To 1,000, Deduct	*-257.09*	
		For >1,000, Deduct	*-327.78*	
26 56 19 00-0237	EA	100 LEDs, 111 Watt, Surface Mount, Rectangular, LED Parking Structure Fixture (CREE® BetaLED® Edge® PKG-EDG)	1,786.60	135.48
		For Multi-Level Drive Currents, Add	*219.88*	
		For >50 To 100, Deduct	*-89.33*	
		For >100 To 250, Deduct	*-134.00*	
		For >250 To 500, Deduct	*-216.55*	
		For >500 To 1,000, Deduct	*-299.11*	
		For >1,000, Deduct	*-381.66*	

26 56 19 00-0238 Surface Mount, Square, LED Parking Structure Fixtures (CREE® BetaLED® Edge® PKG-304) *(26 56 19 00-0232)*

Note: Direct or pendant mount. UL wet listed. Includes 5,700K color temperature, 120-480 voltage, 350mA driver, die-cast extruded aluminum housing assembly and white, black, silver or bronze powder coat finish. Excludes sensors.

26 56 19 00-0239	EA	40 LEDs, 47 Watt, Surface Mount, Square, LED Parking Structure Fixture (CREE® BetaLED® Edge® PKG-304)	1,017.56	116.13
		For Multi-Level Drive Currents, Add	*219.88*	
		For >50 To 100, Deduct	*-50.88*	
		For >100 To 250, Deduct	*-76.32*	
		For >250 To 500, Deduct	*-121.39*	
		For >500 To 1,000, Deduct	*-166.46*	
		For >1,000, Deduct	*-211.53*	
26 56 19 00-0240	EA	60 LEDs, 68 Watt, Surface Mount, Square, LED Parking Structure Fixture (CREE® BetaLED® Edge® PKG-304)	1,123.13	122.58
		For Multi-Level Drive Currents, Add	*219.88*	
		For >50 To 100, Deduct	*-56.16*	
		For >100 To 250, Deduct	*-84.23*	
		For >250 To 500, Deduct	*-134.26*	
		For >500 To 1,000, Deduct	*-184.29*	
		For >1,000, Deduct	*-234.32*	

26 56 19 00-0241 Surface Mount, Square, LED Parking Structure Fixtures (CREE® BetaLED® VG) *(26 56 19 00-0232)*

Note: UL wet listed. Includes 4,000K color temperature, 120-277 voltage, die-cast extruded aluminum housing assembly and white, black, silver or bronze powder coat finish. Excludes sensors.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 19 00-0242	EA	3,700 Lumens, 50 Watt, Surface Mount, Square, LED Parking Structure Fixtures (CREE® BetaLED® VGADM5MA40KUL)	1,032.90	116.13
		For >50 To 100, Deduct	*-51.65*	
		For >100 To 250, Deduct	*-77.47*	
		For >250 To 500, Deduct	*-123.31*	
		For >500 To 1,000, Deduct	*-169.14*	
		For >1,000, Deduct	*-214.98*	

26 56 19 00-0243 Surface Mount, Rectangular, LED Parking Structure Fixtures (Philips Gardco ELG) *(26 56 19 00-0232)*

Note: Direct or pendant mount. UL wet listed. Includes 4,000K color temperature, 120-277 voltage, die-cast extruded aluminum housing assembly and aluminum finish. Excludes sensors.

26 56 19 00-0244	EA	70 Watt, Surface Mount, Rectangular, LED Parking Structure Fixture (Philips Gardco ELG)	2,081.41	122.58
		For >50 To 100, Deduct	*-104.07*	
		For >100 To 250, Deduct	*-156.11*	
		For >250 To 500, Deduct	*-254.05*	
		For >500 To 1,000, Deduct	*-351.99*	
		For >1,000, Deduct	*-449.93*	
26 56 19 00-0245	EA	110 Watt, Surface Mount, Rectangular, LED Parking Structure Fixture (Philips Gardco ELG)	2,107.22	135.48
		For >50 To 100, Deduct	*-105.36*	
		For >100 To 250, Deduct	*-158.04*	
		For >250 To 500, Deduct	*-256.63*	
		For >500 To 1,000, Deduct	*-355.21*	
		For >1,000, Deduct	*-453.80*	

26 56 19 00-0246 Surface Mount, Rectangular, LED Parking Structure Fixtures (Everlast EL-LED-SS) *(26 56 19 00-0232)*

Note: Direct or pendant mount. UL wet listed. Includes 2,700, 4,000K or 5,000K color temperature, 120-277 voltage, die-cast extruded aluminum housing assembly and aluminum finish. Excludes sensors.

26 56 19 00-0247	EA	3,600 Lumens, 36 Watt, Surface Mount, Round, LED Parking Structure Fixture (Everlast EL-LED-SS)	770.51	116.13
		For >50 To 100, Deduct	*-38.53*	
		For >100 To 250, Deduct	*-57.79*	
		For >250 To 500, Deduct	*-90.51*	
		For >500 To 1,000, Deduct	*-123.23*	
		For >1,000, Deduct	*-155.95*	
26 56 19 00-0248	EA	5,000 Lumens, 50 Watt, Surface Mount, Round, LED Parking Structure Fixture (Everlast EL-LED-SS)	851.24	116.13
		For >50 To 100, Deduct	*-42.56*	
		For >100 To 250, Deduct	*-63.84*	
		For >250 To 500, Deduct	*-100.60*	
		For >500 To 1,000, Deduct	*-137.35*	
		For >1,000, Deduct	*-174.11*	
26 56 19 00-0249	EA	7,500 Lumens, 75 Watt, Surface Mount, Round, LED Parking Structure Fixture (Everlast EL-LED-SS)	905.07	116.13
		For >50 To 100, Deduct	*-45.25*	
		For >100 To 250, Deduct	*-67.88*	
		For >250 To 500, Deduct	*-107.33*	
		For >500 To 1,000, Deduct	*-146.77*	
		For >1,000, Deduct	*-186.22*	

26 56 19 00-0250 Surface Mount, LED Canopy Fixtures *(26 56 19 00-0187)*

26 56 19 00-0251 Surface Mount, Rectangular, LED Canopy Fixtures (CREE® BetaLED® Edge® CAN-EDG) *(26 56 19 00-0250)*

Note: Direct or pendant mount. UL wet listed. Includes 6,000K color temperature, 120-480 voltage, 350mA driver, die-cast extruded aluminum housing assembly and white, black, silver or bronze powder coat finish. Excludes sensors.

26 56 19 00-0252	EA	40 LEDs, 47 Watt, Surface Mount, Rectangular, LED Canopy Fixture (CREE® BetaLED® Edge® CAN-EDG)	1,221.73	116.13
		For Multi-Level Drive Currents, Add	*219.88*	
		For >50 To 100, Deduct	*-61.09*	
		For >100 To 250, Deduct	*-91.63*	
		For >250 To 500, Deduct	*-146.91*	
		For >500 To 1,000, Deduct	*-202.19*	
		For >1,000, Deduct	*-257.47*	
26 56 19 00-0253	EA	60 LEDs, 68 Watt, Surface Mount, Rectangular, LED Canopy Fixture (CREE® BetaLED® Edge® CAN-EDG)	1,465.52	122.58
		For Multi-Level Drive Currents, Add	*219.88*	
		For >50 To 100, Deduct	*-73.28*	
		For >100 To 250, Deduct	*-109.91*	
		For >250 To 500, Deduct	*-177.06*	
		For >500 To 1,000, Deduct	*-244.21*	
		For >1,000, Deduct	*-311.35*	
26 56 19 00-0254	EA	80 LEDs, 90 Watt, Surface Mount, Rectangular, LED Canopy Fixture (CREE® BetaLED® Edge® CAN-EDG)	1,709.30	129.04
		For Multi-Level Drive Currents, Add	*219.88*	
		For >50 To 100, Deduct	*-85.47*	
		For >100 To 250, Deduct	*-128.20*	
		For >250 To 500, Deduct	*-207.21*	
		For >500 To 1,000, Deduct	*-286.22*	
		For >1,000, Deduct	*-365.24*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 19 00-0255	EA	100 LEDs, 111 Watt, Surface Mount, Rectangular, LED Canopy Fixture (CREE® BetaLED® Edge® CAN-EDG)	1,953.08	135.48
		For Multi-Level Drive Currents, Add	*219.88*	
		For >50 To 100, Deduct	*-97.65*	
		For >100 To 250, Deduct	*-146.48*	
		For >250 To 500, Deduct	*-237.36*	
		For >500 To 1,000, Deduct	*-328.24*	
		For >1,000, Deduct	*-419.12*	
26 56 19 00-0256	EA	120 LEDs, 132 Watt, Surface Mount, Rectangular, LED Canopy Fixture (CREE® BetaLED® Edge® CAN-EDG)	2,196.86	141.94
		For Multi-Level Drive Currents, Add	*219.88*	
		For >50 To 100, Deduct	*-109.84*	
		For >100 To 250, Deduct	*-164.76*	
		For >250 To 500, Deduct	*-267.51*	
		For >500 To 1,000, Deduct	*-370.26*	
		For >1,000, Deduct	*-473.00*	
26 56 19 00-0257	EA	140 LEDs, 157 Watt, Surface Mount, Rectangular, LED Canopy Fixture (CREE® BetaLED® Edge® CAN-EDG)	2,533.30	148.39
		For Multi-Level Drive Currents, Add	*219.88*	
		For >50 To 100, Deduct	*-126.67*	
		For >100 To 250, Deduct	*-190.00*	
		For >250 To 500, Deduct	*-309.24*	
		For >500 To 1,000, Deduct	*-428.49*	
		For >1,000, Deduct	*-547.73*	
26 56 19 00-0258	EA	160 LEDs, 179 Watt, Surface Mount, Rectangular, LED Canopy Fixture (CREE® BetaLED® Edge® CAN-EDG)	2,777.08	154.84
		For Multi-Level Drive Currents, Add	*219.88*	
		For >50 To 100, Deduct	*-138.85*	
		For >100 To 250, Deduct	*-208.28*	
		For >250 To 500, Deduct	*-339.39*	
		For >500 To 1,000, Deduct	*-470.51*	
		For >1,000, Deduct	*-601.62*	
26 56 19 00-0259	EA	200 LEDs, 221 Watt, Surface Mount, Rectangular, LED Canopy Fixture (CREE® BetaLED® Edge® CAN-EDG)	3,264.64	167.75
		For Multi-Level Drive Currents, Add	*219.88*	
		For >50 To 100, Deduct	*-163.23*	
		For >100 To 250, Deduct	*-244.85*	
		For >250 To 500, Deduct	*-399.69*	
		For >500 To 1,000, Deduct	*-554.54*	
		For >1,000, Deduct	*-709.38*	
26 56 19 00-0260	EA	240 LEDs, 264 Watt, Surface Mount, Rectangular, LED Canopy Fixture (CREE® BetaLED® Edge® CAN-EDG)	3,739.29	174.20
		For Multi-Level Drive Currents, Add	*219.88*	
		For >50 To 100, Deduct	*-186.96*	
		For >100 To 250, Deduct	*-280.45*	
		For >250 To 500, Deduct	*-458.70*	
		For >500 To 1,000, Deduct	*-636.96*	
		For >1,000, Deduct	*-815.21*	

26 56 19 00-0261 Surface Mount, Square, LED Canopy/Soffit Fixtures (CREE® BetaLED® CPY250) *(26 56 19 00-0250)*

Note: UL wet listed. Includes 5,700K color temperature, 120-277 voltage, die-cast extruded aluminum housing assembly and white, black, silver or bronze powder coat finish. Excludes sensors.

26 56 19 00-0262	EA	8,000 Lumens, 82 Watt, Surface Mount, Square, LED Canopy/Soffit Fixture (CREE® BetaLED® CPY250)	850.18	129.04
		For >50 To 100, Deduct	*-42.51*	
		For >100 To 250, Deduct	*-63.76*	
		For >250 To 500, Deduct	*-99.82*	
		For >500 To 1,000, Deduct	*-135.88*	
		For >1,000, Deduct	*-171.94*	

26 56 19 00-0263 Surface Mount, Square, LED Canopy Fixtures (General Electric Evolve™) *(26 56 19 00-0250)*

Note: UL wet listed. Includes 4,000K color temperature, 120-277 voltage, die-cast extruded aluminum housing assembly and powder coat finish. Excludes sensors.

26 56 19 00-0264	EA	35 System Watts, Surface Mount, Rectangular, LED Canopy Fixture (General Electric ECBB 0 A5 5 40 2 A DKBZ)	1,022.54	116.13
		For >50 To 100, Deduct	*-51.13*	
		For >100 To 250, Deduct	*-76.69*	
		For >250 To 500, Deduct	*-122.01*	
		For >500 To 1,000, Deduct	*-167.33*	
		For >1,000, Deduct	*-212.65*	
26 56 19 00-0265	EA	64 System Watts, Surface Mount, Rectangular, LED Canopy Fixture (General Electric ECBB 0 B5 5 40 2 A DKBZ)	1,112.35	122.58
		For >50 To 100, Deduct	*-55.62*	
		For >100 To 250, Deduct	*-83.43*	
		For >250 To 500, Deduct	*-132.91*	
		For >500 To 1,000, Deduct	*-182.40*	
		For >1,000, Deduct	*-231.89*	

26 56 19 00-0266 Recessed Mount, LED Soffit Fixtures *(26 56 19 00-0187)*

26 56 19 00-0267 Recessed Mount, Square, LED Soffit Fixtures (CREE® BetaLED® SFT-304) *(26 56 19 00-0266)*

Note: UL wet listed. Includes 5,700K color temperature, 120/277 voltage, 350mA driver, die-cast extruded aluminum housing assembly and white, black, silver or bronze powder coat finish. Excludes sensors.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 19 00-0268	EA	40 LEDs, 47 Watt, Recessed Mount, Square, LED Soffit Fixture (CREE® BetaLED® SFT-304)	1,036.40	116.13
		For >50 To 100, Deduct	*-51.82*	
		For >100 To 250, Deduct	*-77.73*	
		For >250 To 500, Deduct	*-123.74*	
		For >500 To 1,000, Deduct	*-169.76*	
		For >1,000, Deduct	*-215.77*	
26 56 19 00-0269	EA	60 LEDs, 68 Watt, Recessed Mount, Square, LED Soffit Fixture (CREE® BetaLED® SFT-304)	1,141.98	122.58
		For >50 To 100, Deduct	*-57.10*	
		For >100 To 250, Deduct	*-85.65*	
		For >250 To 500, Deduct	*-136.62*	
		For >500 To 1,000, Deduct	*-187.59*	
		For >1,000, Deduct	*-238.56*	

26 56 19 00-0270 Surface Mount, LED Area Fixtures *(26 56 19 00-0187)*

26 56 19 00-0271 Surface Mount, Square, LED Multi-Purpose Area Fixtures (LSI Industries® Crossover® XPG) *(26 56 19 00-0270)*

Note: UL wet listed. Includes 5,300K color temperature, 120/277 voltage, 350mA driver, die-cast extruded aluminum housing assembly and white, black or silver powder coat finish. Excludes sensors.

26 56 19 00-0272	EA	50 LEDs, 59 Watt, Surface Mount, Square, LED Multi-Purpose Area Fixture (LSI Industries® Crossover® XPG)	715.59	116.13
		For >50 To 100, Deduct	*-35.78*	
		For >100 To 250, Deduct	*-53.67*	
		For >250 To 500, Deduct	*-83.64*	
		For >500 To 1,000, Deduct	*-113.62*	
		For >1,000, Deduct	*-143.59*	
26 56 19 00-0273	EA	50 LEDs, 59 Watt, Pendant Mount, Square, LED Multi-Purpose Area Fixture (LSI Industries® Crossover® XPG)	1,509.74	116.13
		For >50 To 100, Deduct	*-75.49*	
		For >100 To 250, Deduct	*-113.23*	
		For >250 To 500, Deduct	*-182.91*	
		For >500 To 1,000, Deduct	*-252.59*	
		For >1,000, Deduct	*-322.27*	
26 56 19 00-0274	EA	68 LEDs, 79 Watt, Surface Mount, Square, LED Multi-Purpose Area Fixture (LSI Industries® Crossover® XPG)	1,246.57	129.04
		For >50 To 100, Deduct	*-62.33*	
		For >100 To 250, Deduct	*-93.49*	
		For >250 To 500, Deduct	*-149.37*	
		For >500 To 1,000, Deduct	*-205.25*	
		For >1,000, Deduct	*-261.12*	
26 56 19 00-0275	EA	68 LEDs, 79 Watt, Pendant Mount, Square, LED Multi-Purpose Area Fixture (LSI Industries® Crossover® XPG)	1,551.60	129.04
		For >50 To 100, Deduct	*-77.58*	
		For >100 To 250, Deduct	*-116.37*	
		For >250 To 500, Deduct	*-187.50*	
		For >500 To 1,000, Deduct	*-258.63*	
		For >1,000, Deduct	*-329.75*	

26 56 19 00-0276 Surface Mount, LED Multi-Purpose Area Fixture (Lumark Crosstour®) *(26 56 19 00-0270)*

Note: Wall, inverted, post, bollard, floodlight trunnion, or floodlight knuckle mount. UL wet listed. Includes 5,000K color temperature, 120/277 voltage, die-cast extruded aluminum housing assembly and white or bronze powder coat finish. Excludes sensors.

26 56 19 00-0277	EA	13 Watt, Surface Mount, LED Multi-Purpose Area Fixture (Lumark Crosstour® XTOR1A)	230.71	40.61
		For Knuckle Mount Or Trunnion Mount Base, Add	*45.00*	
		For >50 To 100, Deduct	*-11.54*	
		For >100 To 250, Deduct	*-17.30*	
		For >250 To 500, Deduct	*-27.15*	
		For >500 To 1,000, Deduct	*-36.99*	
		For >1,000, Deduct	*-46.83*	
26 56 19 00-0278	EA	20 Watt, Surface Mount, LED Multi-Purpose Area Fixture (Lumark Crosstour® XTOR2A)	265.29	40.61
		For Knuckle Mount Or Trunnion Mount Base, Add	*45.00*	
		For >50 To 100, Deduct	*-13.26*	
		For >100 To 250, Deduct	*-19.90*	
		For >250 To 500, Deduct	*-31.47*	
		For >500 To 1,000, Deduct	*-43.04*	
		For >1,000, Deduct	*-54.61*	
26 56 19 00-0279	EA	30 Watt, Surface Mount, LED Multi-Purpose Area Fixture (Lumark Crosstour® XTOR3A)	331.16	40.61
		For Knuckle Mount Or Trunnion Mount Base, Add	*45.00*	
		For >50 To 100, Deduct	*-16.56*	
		For >100 To 250, Deduct	*-24.84*	
		For >250 To 500, Deduct	*-39.70*	
		For >500 To 1,000, Deduct	*-54.57*	
		For >1,000, Deduct	*-69.44*	

26 56 19 00-0280 Surface Mount, LED Facade Fixtures *(26 56 19 00-0187)*

26 56 19 00-0281 Surface Mount, LED Facade Fixtures (lumenpulse™ lumenfacade™) *(26 56 19 00-0280)*

26 56 19 00-0282	EA	12" Length, Fixed Surface Mount, LED Façade Fixture (lumenpulse™ lumenfacade™)	792.05	47.40
		For >50 To 100, Deduct	*-39.60*	
		For >100 To 250, Deduct	*-59.40*	
		For >250 To 500, Deduct	*-97.20*	
		For >500 To 1,000, Deduct	*-135.00*	
		For >1,000, Deduct	*-172.80*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 19 00-0283	EA	24" Length, Fixed Surface Mount, LED Façade Fixture (lumenpulse™ lumenfacade™)	1,300.95	43.28
		For >50 To 100, Deduct	*-65.05*	
		For >100 To 250, Deduct	*-97.57*	
		For >250 To 500, Deduct	*-161.07*	
		For >500 To 1,000, Deduct	*-224.57*	
		For >1,000, Deduct	*-288.08*	
26 56 19 00-0284	EA	36" Length, Fixed Surface Mount, LED Façade Fixture (lumenpulse™ lumenfacade™)	1,666.54	36.07
		For >50 To 100, Deduct	*-83.33*	
		For >100 To 250, Deduct	*-124.99*	
		For >250 To 500, Deduct	*-207.03*	
		For >500 To 1,000, Deduct	*-289.07*	
		For >1,000, Deduct	*-371.11*	
26 56 19 00-0285	EA	48" Length, Fixed Surface Mount, LED Façade Fixture (lumenpulse™ lumenfacade™)	2,032.12	28.86
		For >50 To 100, Deduct	*-101.61*	
		For >100 To 250, Deduct	*-152.41*	
		For >250 To 500, Deduct	*-252.98*	
		For >500 To 1,000, Deduct	*-353.56*	
		For >1,000, Deduct	*-454.14*	

26 56 19 00-0286 Post Top, LED Area Fixtures *(26 56 19 00-0187)*

26 56 19 00-0287 Post Top, LED Area Fixtures (Cooper Lighting Invue® MSA) *(26 56 19 00-0286)*

Note: UL wet listed. Includes 4,000K color temperature, 120-480 voltage, 350mA remote driver, die-cast extruded aluminum housing assembly and white, black, grey, dark platinum, graphite metallic or bronze powder coat finish. Excludes sensors.

26 56 19 00-0288	EA	1,800 Lumens, 27 Watt, Post Top Mount, Acorn Style LED Area Fixture (Cooper Lighting Invue® MSA-CO1)	2,202.40	177.43
		For >50 To 100, Deduct	*-110.12*	
		For >100 To 250, Deduct	*-165.18*	
		For >250 To 500, Deduct	*-266.43*	
		For >500 To 1,000, Deduct	*-367.68*	
		For >1,000, Deduct	*-468.93*	
26 56 19 00-0289	EA	3,400 Lumens, 54 Watt, Post Top Mount, Acorn Style LED Area Fixture (Cooper Lighting Invue® MSA-CO2)	2,438.13	177.43
		For >50 To 100, Deduct	*-121.91*	
		For >100 To 250, Deduct	*-182.86*	
		For >250 To 500, Deduct	*-295.90*	
		For >500 To 1,000, Deduct	*-408.93*	
		For >1,000, Deduct	*-521.97*	
26 56 19 00-0290	EA	77 Watt, Post Top Mount, Acorn Style LED Area Fixture (Cooper Lighting Invue® MSA-CO3)	2,624.47	177.43
		For >50 To 100, Deduct	*-131.22*	
		For >100 To 250, Deduct	*-196.84*	
		For >250 To 500, Deduct	*-319.19*	
		For >500 To 1,000, Deduct	*-441.54*	
		For >1,000, Deduct	*-563.89*	

26 56 19 00-0291 Post Top, LED Area Fixtures (General Electric EPAS) *(26 56 19 00-0286)*

Note: UL wet listed. Includes 4,100K color temperature, 120-480 voltage, die-cast extruded aluminum housing assembly and black, green or bronze powder coat finish. Includes photocontrol sensor.

26 56 19 00-0292	EA	3,200 Lumens, 45 Watt, Post Top Mount, Acorn Style LED Area Fixture (General Electric EPAS 0 E5/E3)	2,606.64	177.43
		For >50 To 100, Deduct	*-130.33*	
		For >100 To 250, Deduct	*-195.50*	
		For >250 To 500, Deduct	*-316.96*	
		For >500 To 1,000, Deduct	*-438.42*	
		For >1,000, Deduct	*-559.88*	
26 56 19 00-0293	EA	6,515 Lumens, 80 Watt, Post Top Mount, Acorn Style LED Area Fixture (General Electric EPAS 0 C5/C3)	2,667.21	177.43
		For >50 To 100, Deduct	*-133.36*	
		For >100 To 250, Deduct	*-200.04*	
		For >250 To 500, Deduct	*-324.53*	
		For >500 To 1,000, Deduct	*-449.02*	
		For >1,000, Deduct	*-573.51*	

26 56 19 00-0294 Post Top, LED Area Fixtures (General Electric EPTC) *(26 56 19 00-0286)*

Note: UL wet listed. Includes 4,100K color temperature, 120-480 voltage, die-cast extruded aluminum housing assembly and black, gray or dark bronze powder coat finish. Includes photocontrol sensor.

26 56 19 00-0295	EA	3,200 Lumens, 45 Watt, Post Top Mount, Contemporary Twin Support Style LED Area Fixture (General Electric EPTC 0 E5/E3)	1,786.62	177.43
		For >50 To 100, Deduct	*-89.33*	
		For >100 To 250, Deduct	*-134.00*	
		For >250 To 500, Deduct	*-214.46*	
		For >500 To 1,000, Deduct	*-294.92*	
		For >1,000, Deduct	*-375.38*	
26 56 19 00-0296	EA	6,150 Lumens, 80 Watt, Post Top Mount, Contemporary Twin Support Style LED Area Fixture (General Electric EPTC 0 C5/C3)	1,877.26	177.43
		For >50 To 100, Deduct	*-93.86*	
		For >100 To 250, Deduct	*-140.79*	
		For >250 To 500, Deduct	*-225.79*	
		For >500 To 1,000, Deduct	*-310.78*	
		For >1,000, Deduct	*-395.77*	

26 56 19 00-0297 Post Top, LED Area Fixtures (General Electric EPST) *(26 56 19 00-0286)*

Note: UL wet listed. Includes 4,100K color temperature, 120-480 voltage, die-cast extruded aluminum housing assembly and black or dark bronze powder coat finish. Includes photocontrol sensor.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 19 00-0298	EA	3,135 Lumens, 45 Watt, Post Top Mount, Utility Carriage Style LED Area Fixture (General Electric EPST 0 E5/E3)	1,374.60	177.43
		For >50 To 100, Deduct	*-68.73*	
		For >100 To 250, Deduct	*-103.10*	
		For >250 To 500, Deduct	*-162.95*	
		For >500 To 1,000, Deduct	*-222.81*	
		For >1,000, Deduct	*-282.67*	
26 56 19 00-0299	EA	6,115 Lumens, 80 Watt, Post Top Mount, Utility Carriage Style LED Area Fixture (General Electric EPST 0 C5/C3)	1,465.24	177.43
		For >50 To 100, Deduct	*-73.26*	
		For >100 To 250, Deduct	*-109.89*	
		For >250 To 500, Deduct	*-174.28*	
		For >500 To 1,000, Deduct	*-238.67*	
		For >1,000, Deduct	*-303.07*	

26 56 19 00-0300 Post Top, LED Area Fixtures (CREE® BetaLED® Edge® ARE-EDR) *(26 56 19 00-0286)*

Note: UL wet listed. Includes 4,000K color temperature, 120/277 voltage, die-cast extruded aluminum housing assembly and white, black, silver or bronze powder coat finish. Includes Type V Medium optic. Excludes sensors.

26 56 19 00-0301	EA	13,800 Lumens, 130 Watt, Post Top Mount, LED Area Fixture (CREE® BetaLED® Edge® ARE-EDR)	2,748.43	177.43
		For >50 To 100, Deduct	*-137.42*	
		For >100 To 250, Deduct	*-206.13*	
		For >250 To 500, Deduct	*-334.68*	
		For >500 To 1,000, Deduct	*-463.23*	
		For >1,000, Deduct	*-591.78*	

26 56 19 00-0302 LED Retrofit For Post Top, Traditional Area Fixtures (CREE® BetaLED® BXRA) *(26 56 19 00-0286)*

Note: Includes 2,700K or 4,000K color temperature and 120/277 voltage retrofit assembly. Excludes recycling or disposal of lamps and ballasts. See CSI section 02 84 16 00-0003 for ballast recycling.

26 56 19 00-0303	EA	LED Retrofit For Post Top, Holophane® Utility Granville Acorn Area Fixtures (CREE® BetaLED® BXRAAH53)	767.33	96.78
		For 0 To 10 Volt Dimming, Add	*55.57*	
		For >50 To 100, Deduct	*-38.37*	
		For >100 To 250, Deduct	*-57.55*	
		For >250 To 500, Deduct	*-91.08*	
		For >500 To 1,000, Deduct	*-124.61*	
		For >1,000, Deduct	*-158.13*	

26 56 19 00-0304 LED Retrofit For Post Top, Decorative Area Fixtures (CREE® DPT) *(26 56 19 00-0286)*

Note: Includes 3,000K color temperature and 120/277 voltage retrofit assembly. Excludes recycling or disposal of lamps and ballasts. See CSI section 02 84 16 00-0003 for ballast recycling.

26 56 19 00-0305	EA	LED Retrofit For Post Top, Decorative Area Fixtures (CREE® DPT)	479.36	20.65
		For Backlight Control Shield, Add	*37.19*	
		For >50 To 100, Deduct	*-23.97*	
		For >100 To 250, Deduct	*-35.95*	
		For >250 To 500, Deduct	*-57.86*	
		For >500 To 1,000, Deduct	*-79.76*	
		For >1,000, Deduct	*-101.66*	

26 56 19 00-0306 Surface Mount, LED Strip Fixtures (Sylvania) *(26 56 19 00-0187)*

26 56 19 00-0307	EA	4' Long, 5,200 Lumens, 40 Watt, Vapor Tight Dimmable LED Fixture (Sylvania VAPOR1B/040UNVD840/48EC/GR/D)	546.06	37.71
		For >50 To 100, Deduct	*-27.30*	
		For >100 To 250, Deduct	*-40.95*	
		For >250 To 500, Deduct	*-66.84*	
		For >500 To 1,000, Deduct	*-92.73*	
		For >1,000, Deduct	*-118.61*	

26 56 21 HID Exterior Lighting *(26 56)*

26 56 21 00-0001 High Mast Fixtures *(26 56 21)*

26 56 21 00-0002 Metal Halide, High Mast Fixtures *(26 56 21 00-0001)*

26 56 21 00-0003	EA	400 W High Mast Metal Halide Fixture (VA 25 Type V) As Manufactured By Metrolux	2,018.27	159.83
26 56 21 00-0004	EA	400 W High Mast Metal Halide Fixture (VA 25 Type VS, VF 1 And 3) As Manufactured By Metrolux	2,158.65	159.83
26 56 21 00-0005	EA	750 W High Mast Metal Halide Fixture (VA 25 Type V) As Manufactured By Metrolux	2,136.59	182.59
26 56 21 00-0006	EA	750 W High Mast Metal Halide Fixture (VA 25 Type VS, VF 1 And 3) As Manufactured By Metrolux	2,220.82	182.59
26 56 21 00-0007	EA	1,000 W High Mast Metal Halide Fixture (VA 25 Type V) As Manufactured By Metrolux	2,239.57	228.23
26 56 21 00-0008	EA	1,000 W High Mast Metal Halide Fixture (VA 25 Type VS, VF 1 And 3) As Manufactured By Metrolux	2,323.80	228.23

26 56 21 00-0009 High Pressure Sodium, High Mast Fixtures *(26 56 21 00-0001)*

26 56 21 00-0010	EA	400 W High Mast HPS Fixture (VA 25 Type V) As Manufactured By Metrolux	2,085.68	159.83
26 56 21 00-0011	EA	400 W High Mast HPS Fixture (VA 25 Type VS, VF 1 And 3) As Manufactured By Metrolux	2,169.91	159.83
26 56 21 00-0012	EA	600 Watt High Mast HPS Fixture (VA 25 Type V, VS, VF 1 And 3) As Manufactured By Metrolux	2,528.64	168.96
26 56 21 00-0013	EA	750 Watt High Mast HPS Fixture (VA 25 Type V, VS, VF 1 And 3) As Manufactured By Metrolux	2,589.00	182.59
26 56 21 00-0014	EA	1,000 Watt High Mast HPS Fixture (VA 25 Type V, VS, VF 1 And 3) As Manufactured By Metrolux	2,734.11	228.23

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 21 00-0015		**HID, Pole Mounted** *(26 56 21)*		
26 56 21 00-0016		**Metal Halide, Pole Mounted** *(26 56 21 00-0015)*		
26 56 21 00-0017	EA	175 Watt Metal Halide, Enclosed And Gasketed, Exterior Roadway Fixture	745.82	260.62
26 56 21 00-0018	EA	250 Watt Metal Halide, Enclosed And Gasketed, Exterior Roadway Fixture	843.77	282.89
26 56 21 00-0019	EA	400 Watt Metal Halide, Enclosed And Gasketed, Exterior Roadway Fixture	992.61	304.32
26 56 21 00-0020	EA	1,000 Watt Metal Halide, Enclosed And Gasketed, Exterior Roadway Fixture	1,241.92	356.65
26 56 21 00-0021		**High Pressure Sodium, Pole Mounted** *(26 56 21 00-0015)*		
26 56 21 00-0022	EA	100 Watt High Pressure Sodium, Enclosed And Gasketed, Exterior Roadway Fixture	833.78	304.32
26 56 21 00-0023	EA	150 Watt High Pressure Sodium, Enclosed And Gasketed, Exterior Roadway Fixture	859.97	304.32
26 56 21 00-0024	EA	175 Watt High Pressure Sodium, Enclosed And Gasketed, Exterior Roadway Fixture	900.13	304.32
26 56 21 00-0025	EA	250 Watt High Pressure Sodium, Enclosed And Gasketed, Exterior Roadway Fixture	1,009.14	304.32
26 56 21 00-0026	EA	400 Watt High Pressure Sodium, Enclosed And Gasketed, Exterior Roadway Fixture	1,164.21	304.32
26 56 21 00-0027	EA	1,000 Watt High Pressure Sodium, Enclosed And Gasketed, Exterior Roadway Fixture	1,183.46	304.32
26 56 21 00-0028		**Low Pressure Sodium, Pole Mounted** *(26 56 21 00-0015)*		
26 56 21 00-0029	EA	135 Watt Low Pressure Sodium Exterior Roadway Fixture, Enclosed And Gasketed	758.58	165.55
26 56 21 00-0030	EA	135 Watt Low Pressure Sodium Fixture, Enclosed And Gasketed	787.43	243.45
26 56 21 00-0031	EA	180 Watt Low Pressure Sodium Fixture, Enclosed And Gasketed	945.19	243.45
26 56 21 00-0032		**Metal Halide, Area Fixtures** *(26 56 21)*		
26 56 21 00-0033		**Metal Halide, Pole Mount, Area Fixtures** *(26 56 21 00-0032)*		
		Note: Includes pulse start ballast.		
26 56 21 00-0034	EA	150 Watt, Metal Halide Area Fixture, Pole Mount	1,178.91	162.46
26 56 21 00-0035	EA	175 Watt, Metal Halide Area Fixture, Pole Mount	1,293.59	178.72
26 56 21 00-0036	EA	250 Watt, Metal Halide Area Fixture, Pole Mount	1,431.48	194.96
26 56 21 00-0037	EA	400 Watt, Metal Halide Area Fixture, Pole Mount	1,506.89	227.46
26 56 21 00-0038		**High Pressure Sodium, Area Fixtures** *(26 56 21)*		
26 56 21 00-0039		**Pole Mount, High Pressure Sodium Area Fixtures** *(26 56 21 00-0038)*		
26 56 21 00-0040	EA	100 Watt, High Pressure Sodium Area Fixture, Pole Mount	981.07	129.97
26 56 21 00-0041	EA	150 Watt, High Pressure Sodium Area Fixture, Pole Mount	1,060.75	162.46
26 56 21 00-0042	EA	250 Watt, High Pressure Sodium Area Fixture, Pole Mount	1,144.38	194.96
26 56 21 00-0043	EA	400 Watt, High Pressure Sodium Area Fixture, Pole Mount	1,199.22	227.46
26 56 21 00-0044		**Surface Mounted, Rectangular Exterior Area Fixture** *(26 56 21)*		
26 56 21 00-0045		**Metal Halide, Surface Mounted, Rectangular Exterior Area Fixture** *(26 56 21 00-0044)*		
26 56 21 00-0046	EA	175 Watt Metal Halide, Surface Mounted, Enclosed And Gasketed, Rectangular Exterior Area Fixture	695.51	243.45
26 56 21 00-0047	EA	250 Watt Metal Halide, Surface Mounted, Enclosed And Gasketed, Rectangular Exterior Area Fixture	797.92	273.88
26 56 21 00-0048	EA	400 Watt Metal Halide, Surface Mounted, Enclosed And Gasketed, Rectangular Exterior Area Fixture	966.91	304.32
26 56 21 00-0049	EA	1,000 Watt Metal Halide, Surface Mounted, Enclosed And Gasketed, Rectangular Exterior Area Fixture	1,218.03	356.65
26 56 21 00-0050		**High Pressure Sodium, Surface Mounted, Rectangular Exterior Area Fixture** *(26 56 21 00-0044)*		
26 56 21 00-0051	EA	70 Watt High Pressure Sodium, Surface Mounted, Enclosed And Gasketed, Rectangular Exterior Area Fixture (LumaPro)	678.12	208.16
26 56 21 00-0052	EA	100 Watt High Pressure Sodium, Surface Mounted, Enclosed And Gasketed, Rectangular Exterior Area Fixture (LumaPro)	739.06	221.54
26 56 21 00-0053	EA	150 Watt High Pressure Sodium, Surface Mounted, Enclosed And Gasketed, Rectangular Exterior Area Fixture (LumaPro)	798.31	233.71
26 56 21 00-0054	EA	175 Watt High Pressure Sodium, Surface Mounted, Enclosed And Gasketed, Rectangular Exterior Area Fixture	824.36	243.45
26 56 21 00-0055	EA	250 Watt High Pressure Sodium, Surface Mounted, Enclosed And Gasketed, Rectangular Exterior Area Fixture	918.12	273.88
26 56 21 00-0056	EA	400 Watt High Pressure Sodium, Surface Mounted, Enclosed And Gasketed, Rectangular Exterior Area Fixture	990.71	304.32
26 56 21 00-0057	EA	1,000 Watt High Pressure Sodium, Surface Mounted, Enclosed And Gasketed, Rectangular Exterior Area Fixture	1,353.87	356.65
26 56 21 00-0058		**Vandal Resistant, Surface Mounted, Rectangular Exterior Area Fixtures** *(26 56 21)*		
26 56 21 00-0059		**High Pressure Sodium, Vandal Resistant, Surface Mounted, Rectangular Exterior Area Fixtures** *(26 56 21 00-0058)*		
		Note: Includes cast aluminum powder coated housing, polycarbonate lens and tamperproof screws.		
26 56 21 00-0060	EA	35 Watt High Pressure Sodium, Vandal Resistant, Surface Mounted, Rectangular Exterior Area Fixture	826.28	164.33
26 56 21 00-0061	EA	50 Watt High Pressure Sodium, Vandal Resistant, Surface Mounted, Rectangular Exterior Area Fixture	854.25	182.59
26 56 21 00-0062	EA	70 Watt High Pressure Sodium, Vandal Resistant, Surface Mounted, Rectangular Exterior Area Fixture	909.79	208.16
26 56 21 00-0063	EA	100 Watt High Pressure Sodium, Vandal Resistant, Surface Mounted, Rectangular Exterior Area Fixture	933.45	221.54
26 56 21 00-0064	EA	150 Watt High Pressure Sodium, Vandal Resistant, Surface Mounted, Rectangular Exterior Area Fixture	957.69	233.71
26 56 21 00-0065	EA	175 Watt High Pressure Sodium, Vandal Resistant, Surface Mounted, Rectangular Exterior Area Fixture	1,003.78	243.45
26 56 21 00-0066	EA	250 Watt High Pressure Sodium, Vandal Resistant, Surface Mounted, Rectangular Exterior Area Fixture	1,100.90	273.88
26 56 21 00-0067	EA	400 Watt High Pressure Sodium, Vandal Resistant, Surface Mounted, Rectangular Exterior Area Fixture	1,345.29	304.32

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 21 00-0068		**Metal Halide, Vandal Resistant, Surface Mounted, Rectangular Exterior Area Fixtures** *(26 56 21 00-0058)*		
		Note: Includes cast aluminum powder coated housing, polycarbonate lens and tamperproof screws.		
26 56 21 00-0069	EA	50 Watt Metal Halide, Vandal Resistant, Surface Mounted, Rectangular Exterior Area Fixture	909.38	182.59
26 56 21 00-0070	EA	70 Watt Metal Halide, Vandal Resistant, Surface Mounted, Rectangular Exterior Area Fixture	956.51	208.16
26 56 21 00-0071	EA	100 Watt Metal Halide, Vandal Resistant, Surface Mounted, Rectangular Exterior Area Fixture	988.07	221.54
26 56 21 00-0072	EA	150 Watt Metal Halide, Vandal Resistant, Surface Mounted, Rectangular Exterior Area Fixture	1,029.05	233.71
26 56 21 00-0073	EA	175 Watt Metal Halide, Vandal Resistant, Surface Mounted, Rectangular Exterior Area Fixture	1,050.54	243.45
26 56 21 00-0074	EA	250 Watt Metal Halide, Vandal Resistant, Surface Mounted, Rectangular Exterior Area Fixture	1,150.04	273.88
26 56 21 00-0075	EA	400 Watt Metal Halide, Vandal Resistant, Surface Mounted, Rectangular Exterior Area Fixture	1,475.99	304.32
26 56 21 00-0076		**Wall Packs** *(26 56 21)*		
26 56 21 00-0077		**Non-Cutoff, Polycarbonate Lens, Mini Wall Packs** *(26 56 21 00-0076)*		
		Note: Polycarbonate body and aluminum reflector. 11" x 6-1/2" x 5-1/4". Lithonia TWS.		
26 56 21 00-0078	EA	13 Watt Compact Fluorescent, Non-Cutoff, Polycarbonate Lens, Mini Wall Pack	363.12	56.40
26 56 21 00-0079	EA	50 Watt Metal Halide, Non-Cutoff, Polycarbonate Lens, Mini Wall Pack	391.62	56.40
26 56 21 00-0080	EA	35 Watt High Pressure Sodium, Non-Cutoff, Polycarbonate Lens, Mini Wall Pack	391.62	56.40
26 56 21 00-0081	EA	70 Watt High Pressure Sodium, Non-Cutoff, Polycarbonate Lens, Mini Wall Pack	529.75	56.40
26 56 21 00-0082		**Semi-Cutoff, Polycarbonate Lens, Mini Wall Packs** *(26 56 21 00-0076)*		
		Note: Polycarbonate body and diffused aluminum reflector. 10" x 11-1/2" x 8-15/16". Lithonia TWA.		
26 56 21 00-0083	EA	42 Watt Compact Fluorescent, Semi-Cutoff, Polycarbonate Lens, Mini Wall Pack	752.71	56.40
26 56 21 00-0084	EA	50 Watt Metal Halide, Semi-Cutoff, Polycarbonate Lens, Mini Wall Pack	762.95	56.40
26 56 21 00-0085	EA	70 Watt Metal Halide, Semi-Cutoff, Polycarbonate Lens, Mini Wall Pack	771.82	56.40
26 56 21 00-0086	EA	100 Watt Metal Halide, Semi-Cutoff, Polycarbonate Lens, Mini Wall Pack	755.65	56.40
26 56 21 00-0087	EA	70 Watt High Pressure Sodium, Semi-Cutoff, Polycarbonate Lens, Mini Wall Pack	689.18	56.40
26 56 21 00-0088	EA	100 Watt High Pressure Sodium, Semi-Cutoff, Polycarbonate Lens, Mini Wall Pack	652.67	56.40
26 56 21 00-0089		**Cutoff, Polycarbonate Lens, Mini Wall Packs** *(26 56 21 00-0076)*		
		Note: Polycarbonate body and diffused aluminum reflector. 10" x 11-1/2" x 8-15/16". Lithonia TWAC.		
26 56 21 00-0090	EA	50 Watt Metal Halide, Cutoff, Polycarbonate Lens, Mini Wall Pack	794.76	56.40
26 56 21 00-0091	EA	70 Watt Metal Halide, Cutoff, Polycarbonate Lens, Mini Wall Pack	804.10	56.40
26 56 21 00-0092	EA	100 Watt Metal Halide, Cutoff, Polycarbonate Lens, Mini Wall Pack	787.96	56.40
26 56 21 00-0093	EA	70 Watt High Pressure Sodium, Cutoff, Polycarbonate Lens, Mini Wall Pack	800.96	56.40
26 56 21 00-0094	EA	100 Watt High Pressure Sodium, Cutoff, Polycarbonate Lens, Mini Wall Pack	800.96	56.40
26 56 21 00-0095		**Non-Cutoff, Borosilicate Glass Lens, Small Wall Packs** *(26 56 21 00-0076)*		
		Note: Aluminum body and reflector. 9" x 13" x 7-3/8". Lithonia TWR1.		
26 56 21 00-0096	EA	70 Watt Metal Halide, Non-Cutoff, Borosilicate Glass Lens, Small Wall Pack	743.76	75.13
26 56 21 00-0097	EA	100 Watt Metal Halide, Non-Cutoff, Borosilicate Glass Lens, Small Wall Pack	743.76	75.13
26 56 21 00-0098	EA	175 Watt Metal Halide, Non-Cutoff, Borosilicate Glass Lens, Small Wall Pack	693.73	75.13
26 56 21 00-0099	EA	70 Watt High Pressure Sodium, Non-Cutoff, Borosilicate Glass Lens, Small Wall Pack	712.90	75.13
26 56 21 00-0100	EA	100 Watt High Pressure Sodium, Non-Cutoff, Borosilicate Glass Lens, Small Wall Pack	712.90	75.13
26 56 21 00-0101	EA	150 Watt High Pressure Sodium, Non-Cutoff, Borosilicate Glass Lens, Small Wall Pack	657.43	75.13
26 56 21 00-0102		**Cutoff, Borosilicate Glass Lens, Small Wall Packs** *(26 56 21 00-0076)*		
		Note: Aluminum body and reflector. 10-1/4" x 13" x 8-15/32". Lithonia TWR1C.		
26 56 21 00-0103	EA	70 Watt Metal Halide, Cutoff, Borosilicate Glass Lens, Small Wall Pack	773.40	75.13
26 56 21 00-0104	EA	100 Watt Metal Halide, Cutoff, Borosilicate Glass Lens, Small Wall Pack	773.40	75.13
26 56 21 00-0105	EA	175 Watt Metal Halide, Cutoff, Borosilicate Glass Lens, Small Wall Pack	773.40	75.13
26 56 21 00-0106	EA	70 Watt High Pressure Sodium, Cutoff, Borosilicate Glass Lens, Small Wall Pack	743.97	75.13
26 56 21 00-0107	EA	100 Watt High Pressure Sodium, Cutoff, Borosilicate Glass Lens, Small Wall Pack	743.97	75.13
26 56 21 00-0108	EA	150 Watt High Pressure Sodium, Cutoff, Borosilicate Glass Lens, Small Wall Pack	743.97	75.13
26 56 21 00-0109		**Full Cutoff, Tempered Glass Lens, Small Wall Packs** *(26 56 21 00-0076)*		
		Note: Aluminum body and reflector. 9-3/8" x 14-3/8" x 8-3/4". Meets Nighttime Friendly criteria. Lithonia TWR1S.		
26 56 21 00-0110	EA	175 Watt Metal Halide, Full Cutoff, Tempered Glass Lens, Small Wall Pack	1,012.85	75.13
26 56 21 00-0111		**Cutoff, Borosilicate Glass Lens, Medium Wall Packs** *(26 56 21 00-0076)*		
		Note: Aluminum body and reflector. Lithonia TWR2.		
26 56 21 00-0112	EA	250 Watt Metal Halide, Cutoff, Borosilicate Glass Lens, Medium Wall Pack Note: 9-1/4" x 17-7/8" x 9-3/8".	937.81	93.06
26 56 21 00-0113	EA	400 Watt Metal Halide, Cutoff, Borosilicate Glass Lens, Medium Wall Pack Note: 9-1/4" x 17-7/8" x 12-1/2".	1,005.63	93.06
26 56 21 00-0114	EA	250 Watt High Pressure Sodium, Cutoff, Borosilicate Glass Lens, Medium Wall Pack Note: 9-1/4" x 17-7/8" x 9-3/8".	1,086.49	93.06
26 56 21 00-0115	EA	400 Watt High Pressure Sodium, Cutoff, Borosilicate Glass Lens, Medium Wall Pack Note: 9-1/4" x 17-7/8" x 12-1/2".	1,108.75	93.06
26 56 21 00-0116		**Cutoff, Tempered Glass Lens, Medium Wall Packs** *(26 56 21 00-0076)*		
		Note: Aluminum body and reflector. 10" x 17-1/8" x 14-1/2". Lithonia TWR2C.		
26 56 21 00-0117	EA	250 Watt Metal Halide, Cutoff, Tempered Glass Lens, Medium Wall Pack	1,025.04	93.06

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 21 00-0118	EA	400 Watt Metal Halide, Cutoff, Tempered Glass Lens, Medium Wall Pack	1,101.25	93.06
26 56 21 00-0119		**Non-Cutoff, Polycarbonate Lens, Large Wall Packs** *(26 56 21 00-0076)*		
		Note: Polycarbonate body and powder coated reflector. 15-7/16" x 16-1/8" x 7-3/4". Lithonia TWP.		
26 56 21 00-0120	EA	100 Watt Metal Halide, Non-Cutoff, Polycarbonate Lens, Large Wall Pack	930.25	112.80
26 56 21 00-0121	EA	175 Watt Metal Halide, Non-Cutoff, Polycarbonate Lens, Large Wall Pack	849.54	112.80
26 56 21 00-0122	EA	70 Watt High Pressure Sodium, Non-Cutoff, Polycarbonate Lens, Large Wall Pack	911.57	112.80
26 56 21 00-0123	EA	100 Watt High Pressure Sodium, Non-Cutoff, Polycarbonate Lens, Large Wall Pack	917.75	112.80
26 56 21 00-0124	EA	150 Watt High Pressure Sodium, Non-Cutoff, Polycarbonate Lens, Large Wall Pack	924.22	112.80
26 56 21 00-0125		**Non-Cutoff, Borosilicate Glass Lens, Large Wall Packs** *(26 56 21 00-0076)*		
		Note: Aluminum body and reflector. 15-3/4" x 16-1/4" x 8". Lithonia TWH.		
26 56 21 00-0126	EA	175 Watt Metal Halide, Non-Cutoff, Borosilicate Glass Lens, Large Wall Pack	930.27	112.80
26 56 21 00-0127	EA	250 Watt Metal Halide, Non-Cutoff, Borosilicate Glass Lens, Large Wall Pack	957.20	112.80
26 56 21 00-0128	EA	400 Watt Metal Halide, Non-Cutoff, Borosilicate Glass Lens, Large Wall Pack	1,037.91	112.80
26 56 21 00-0129	EA	150 Watt High Pressure Sodium, Non-Cutoff, Borosilicate Glass Lens, Large Wall Pack	984.11	112.80
26 56 21 00-0130	EA	250 Watt High Pressure Sodium, Non-Cutoff, Borosilicate Glass Lens, Large Wall Pack	1,011.05	112.80
26 56 21 00-0131	EA	400 Watt High Pressure Sodium, Non-Cutoff, Borosilicate Glass Lens, Large Wall Pack	1,064.80	112.80
26 56 21 00-0132		**Semi-Cutoff, Induction Wall Packs** *(26 56 21 00-0076)*		
26 56 21 00-0133		**Semi-Cutoff, Induction Wall Packs (Everlast®)** *(26 56 21 00-0132)*		
		Note: UL wet listed. Includes bi-level ballast, die-cast aluminum housing assembly and bronze powder coat finish. Excludes sensors.		
26 56 21 00-0134	EA	70 Watt, Wall Mount, Semi-Cutoff, Bi-Level Induction Wall Pack (Everlast® EOF-ED-70)	1,250.46	109.68
26 56 21 00-0135	EA	80 Watt, Wall Mount, Semi-Cutoff, Bi-Level Induction Wall Pack (Everlast® EOF-ED-80)	1,274.85	116.13
26 56 21 00-0136	EA	100 Watt, Wall Mount, Semi-Cutoff, Bi-Level Induction Wall Pack (Everlast® EOF-ED-100)	1,299.25	122.58
26 56 21 00-0137	EA	120 Watt, Wall Mount, Semi-Cutoff, Bi-Level Induction Wall Pack (Everlast® EOF-ED-120)	1,450.01	129.04
26 56 21 00-0138		**Non-Cutoff, Polycarbonate Lens, Small Wall Packs** *(26 56 21 00-0076)*		
26 56 21 00-0139	EA	15 Watt, Exterior, Non-Cutoff Small Wall Pack (Sylvania 60066-SMWLPAK1N/015UNV740/NC/BZ/P)	375.68	56.40
26 56 21 00-0140		**Induction, Roadway Lighting** *(26 56 21)*		
26 56 21 00-0141		**Induction Roadway Lighting (US Lighting Tech)** *(26 56 21 00-0140)*		
		Note: Includes gray powder coat finish heavy-duty die cast aluminum body and flat glass lens.		
26 56 21 00-0142	EA	40 Watt Induction, Horizontal Tenon Mount, Street Light (US Lighting Tech Jersey HR, 511)	687.93	193.55
26 56 21 00-0143	EA	70 Watt Induction, Horizontal Tenon Mount, Street Light (US Lighting Tech Jersey HR, 511)	759.81	200.01
26 56 21 00-0144	EA	100 Watt Induction, Horizontal Tenon Mount, Street Light (US Lighting Tech Jersey HR, 511)	785.61	212.91
26 56 21 00-0145	EA	150 Watt Induction, Horizontal Tenon Mount, Street Light (US Lighting Tech Jersey HR, 511)	811.42	225.81
26 56 21 00-0146	EA	200 Watt Induction, Horizontal Tenon Mount, Street Light (US Lighting Tech Jersey HR, 511)	959.98	232.26
26 56 21 00-0147	EA	250 Watt Induction, Horizontal Tenon Mount, Street Light (US Lighting Tech Jersey HR, 511)	977.61	238.72
26 56 21 00-0148	EA	40 Watt Induction, Horizontal Tenon Mount, Cobra Head Street Light (US Lighting Tech Cobra 100, 512)	638.38	193.55
26 56 21 00-0149	EA	70 Watt Induction, Horizontal Tenon Mount, Cobra Head Street Light (US Lighting Tech Cobra 100, 512)	717.34	200.01
26 56 21 00-0150	EA	100 Watt Induction, Horizontal Tenon Mount, Cobra Head Street Light (US Lighting Tech Cobra 100, 512)	743.14	212.91
26 56 21 00-0151	EA	150 Watt Induction, Horizontal Tenon Mount, Cobra Head Street Light (US Lighting Tech Cobra 100, 512)	768.95	225.81
26 56 21 00-0152		**Induction, Area Fixtures** *(26 56 21)*		
26 56 21 00-0153		**Post Top, Induction Area Fixtures** *(26 56 21 00-0152)*		
26 56 21 00-0154		**Post Top, Induction Area Fixtures (US Lighting Tech)** *(26 56 21 00-0153)*		
		Note: Includes black powder coat finish heavy-duty die cast aluminum body and no-lite lid acrylic lens.		
26 56 21 00-0155	EA	40 Watt Induction, Post Top Mount, Acorn Style Area Fixture (US Lighting Tech Acorn, 571)	780.71	177.43
26 56 21 00-0156	EA	70 Watt Induction, Post Top Mount, Acorn Style Area Fixture (US Lighting Tech Acorn, 571)	849.13	177.43
26 56 21 00-0157	EA	100 Watt Induction, Post Top Mount, Acorn Style Area Fixture (US Lighting Tech Acorn, 571)	849.13	177.43
26 56 21 00-0158	EA	150 Watt Induction, Post Top Mount, Acorn Style Area Fixture (US Lighting Tech Acorn, 571)	849.13	177.43
26 56 21 00-0159		**Surface Mount, Induction Parking Structure Fixtures** *(26 56 21 00-0152)*		
26 56 21 00-0160		**Surface Mount, Induction Parking Structure Fixtures (Everlast®)** *(26 56 21 00-0159)*		
26 56 21 00-0161	EA	40 Watt Induction, Surface Mount, Round, Parking Structure Fixture (Everlast® Davenport EGFUS-EC)	706.13	161.29
26 56 21 00-0162	EA	55 Watt Induction, Surface Mount, Round, Parking Structure Fixture (Everlast® Davenport EGFUS-EC)	752.70	164.52
26 56 21 00-0163	EA	70 Watt Induction, Surface Mount, Round, Parking Structure Fixture (Everlast® Davenport EGFUS-EC)	763.87	167.75
26 56 21 00-0164	EA	80 Watt Induction, Surface Mount, Round, Parking Structure Fixture (Everlast® Davenport EGFUS-EC)	775.05	170.97
26 56 21 00-0165	EA	100 Watt Induction, Surface Mount, Round, Parking Structure Fixture (Everlast® Davenport EGFUS-EC)	786.21	174.20
26 56 21 00-0166	EA	120 Watt Induction, Surface Mount, Round, Parking Structure Fixture (Everlast® Davenport EGFUS-EC)	802.11	177.43
26 56 21 00-0167	EA	70/28 Watt Bi-Level Induction, Surface Mount, Round, Parking Structure Fixture (Everlast® Davenport EGFUS-EC)	832.29	167.75
26 56 21 00-0168	EA	80/32 Watt Bi-Level Induction, Surface Mount, Round, Parking Structure Fixture (Everlast® Davenport EGFUS-EC)	843.47	170.97
26 56 21 00-0169	EA	100/40 Watt Bi-Level Induction, Surface Mount, Round, Parking Structure Fixture (Everlast® Davenport EGFUS-EC)	854.63	174.20
26 56 21 00-0170	EA	120/48 Watt Bi-Level Induction, Surface Mount, Round, Parking Structure Fixture (Everlast® Davenport EGFUS-EC)	890.58	177.43

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
26 56 21 00-0171		Pole Mount, Induction Area Fixtures *(26 56 21 00-0152)*		
26 56 21 00-0172		Pole Mount, Bi-Level Induction Area Fixtures (Everlast® ESB-ED) *(26 56 21 00-0171)*		
		Note: UL wet listed. Includes bi-level ballast, die-cast aluminum housing assembly and bronze powder coat finish. Excludes sensors.		
26 56 21 00-0173	EA	70 Watt, Pole Mount, Bi-Level Induction Area Fixture (Everlast® ESB-ED-70)	1,307.90	109.68
26 56 21 00-0174	EA	80 Watt, Pole Mount, Bi-Level Induction Area Fixture (Everlast® ESB-ED-80)	1,343.78	116.13
26 56 21 00-0175	EA	100 Watt, Pole Mount, Bi-Level Induction Area Fixture (Everlast® ESB-ED-100)	1,379.67	122.58

END OF SECTION 26

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

27 Communications

Note: Termination costs are included with all communication equipment, panel boards, and devices. Terminations are not included with patch panels.

27 05 Common Work Results for Communications *(27)*

27 05 26 Grounding and Bonding for Communications Systems *(27 05)*

See CSI section 26 05 26 00-0000 for grounding.

27 05 26 00-0001	EA	25 Pair Outdoor, Enclosed Building Entrance Terminal (ADC 6649 1 720-00) Note: Excludes terminations.		1,071.42	115.49
27 05 26 00-0002	EA	50 Pair Outdoor, Enclosed Building Entrance Terminal (ADC 6649 1 820-00) Note: Excludes terminations.		1,363.70	154.02
27 05 26 00-0003	EA	100 Pair Outdoor, Enclosed Building Entrance Terminal (ADC 6649 1 630-00) Note: Excludes terminations.		2,167.28	230.97
27 05 26 00-0004	EA	Lucent 3B1-EW, Gas Tube Protector Unit		12.93	1.70
27 05 26 00-0005	EA	44 Terminal Copper Ground Bus Bar (Siemens ECGK)		77.93	30.51
27 05 26 00-0006	EA	2" x 1/4" x 12", G Pattern, Grounding Bus Bar		187.49	30.51
27 05 26 00-0007	EA	2" x 1/4" x 12", TGB Pattern, Grounding Bus Bar		202.78	30.51
27 05 26 00-0008	EA	4" x 1/4" x 12", TMGB Pattern, Grounding Bus Bar		393.71	30.51
27 05 26 00-0009	EA	#6 AWG, Cable Runway Ground Strap		78.57	5.65
27 05 26 00-0010	EA	1/4" Screw Size, #6 AWG Compression Lug		26.25	5.65
27 05 26 00-0011	EA	3/8" Screw Size, #6 AWG Compression Lug		28.09	5.65
27 05 26 00-0012	EA	Two Mounting Hole, Ground Terminal Block		31.50	5.65

27 05 29 Hangers and Supports for Communications Systems *(27 05)*

See CSI section 26 05 29 00-0000 for hangers and supports.

27 05 29 00-0001 Communications And Low Voltage Cable Hooks (J-Hooks) *(27 05 29)*

27 05 29 00-0002 Screw On Attachment, Communications And Low Voltage Cable Hooks (J-Hooks) *(27 05 29 00-0001)*
Note: Includes screw.

27 05 29 00-0003	EA	3/4" Hook Size, Pre-Galvanized Finish, Screw On, Communications And Low Voltage Cable Hook (J-Hook) (Cooper B-line BCH12)		9.37	2.82
		For >50 To 100, Deduct	*-0.38*		
		For >100 To 250, Deduct	*-0.75*		
		For >250 To 500, Deduct	*-1.41*		
		For >500, Deduct	*-2.07*		
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.51*		
		For Work In Restricted Working Space, Add	*1.70*		
		For Painted Powder Coated Finish, Add	*0.76*		
27 05 29 00-0004	EA	1-5/16" Hook Size, Pre-Galvanized Finish, Screw On, Communications And Low Voltage Cable Hook (J-Hook) (Cooper B-line BCH21)		9.95	2.82
		For >50 To 100, Deduct	*-0.39*		
		For >100 To 250, Deduct	*-0.78*		
		For >250 To 500, Deduct	*-1.45*		
		For >500, Deduct	*-2.13*		
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.51*		
		For Work In Restricted Working Space, Add	*1.70*		
		For Painted Powder Coated Finish, Add	*2.65*		
		For Low Friction Xylan® Coated Finish, Add	*9.44*		
27 05 29 00-0005	EA	2" Hook Size, Pre-Galvanized Finish, Screw On, Communications And Low Voltage Cable Hook (J-Hook) (Cooper B-line BCH32)		10.84	2.82
		For >50 To 100, Deduct	*-0.41*		
		For >100 To 250, Deduct	*-0.82*		
		For >250 To 500, Deduct	*-1.52*		
		For >500, Deduct	*-2.21*		
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.51*		
		For Work In Restricted Working Space, Add	*1.70*		
		For Painted Powder Coated Finish, Add	*3.25*		
		For Low Friction Xylan® Coated Finish, Add	*11.73*		
27 05 29 00-0006	EA	4" Hook Size, Pre-Galvanized Finish, Screw On, Communications And Low Voltage Cable Hook (J-Hook) (Cooper B-line BCH64)		18.56	2.82
		For >50 To 100, Deduct	*-0.61*		
		For >100 To 250, Deduct	*-1.21*		
		For >250 To 500, Deduct	*-2.10*		
		For >500, Deduct	*-2.99*		
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.51*		
		For Work In Restricted Working Space, Add	*1.70*		
		For Painted Powder Coated Finish, Add	*1.74*		
		For Low Friction Xylan® Coated Finish, Add	*10.40*		

27 05 29 00-0007 Screw On Angle Bracket Attachment, Communications And Low Voltage Cable Hooks (J-Hooks) *(27 05 29 00-0001)*
Note: Includes screw.

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 05 29 00-0008	EA	3/4" Hook Size, Pre-Galvanized Finish, Screw On Angle Bracket Attachment, Communications And Low Voltage Cable Hook (J-Hook) (Cooper B-line BCH12-RB)	10.73	2.82
		For >50 To 100, Deduct	*-0.41*	
		For >100 To 250, Deduct	*-0.82*	
		For >250 To 500, Deduct	*-1.51*	
		For >500, Deduct	*-2.20*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.51*	
		For Work In Restricted Working Space, Add	*1.70*	
27 05 29 00-0009	EA	1-5/16" Hook Size, Pre-Galvanized Finish, Screw On Angle Bracket Attachment, Communications And Low Voltage Cable Hook (J-Hook) (Cooper B-line BCH21-RB)	14.20	2.82
		For >50 To 100, Deduct	*-0.50*	
		For >100 To 250, Deduct	*-0.99*	
		For >250 To 500, Deduct	*-1.77*	
		For >500, Deduct	*-2.55*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.51*	
		For Work In Restricted Working Space, Add	*1.70*	
27 05 29 00-0010	EA	2" Hook Size, Pre-Galvanized Finish, Screw On Angle Bracket Attachment, Communications And Low Voltage Cable Hook (J-Hook) (Cooper B-line BCH32-RB)	15.89	2.82
		For >50 To 100, Deduct	*-0.54*	
		For >100 To 250, Deduct	*-1.08*	
		For >250 To 500, Deduct	*-1.90*	
		For >500, Deduct	*-2.72*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.51*	
		For Work In Restricted Working Space, Add	*1.70*	
27 05 29 00-0011	EA	4" Hook Size, Pre-Galvanized Finish, Screw On Angle Bracket Attachment, Communications And Low Voltage Cable Hook (J-Hook) (Cooper B-line BCH64-RB)	21.95	2.82
		For >50 To 100, Deduct	*-0.69*	
		For >100 To 250, Deduct	*-1.38*	
		For >250 To 500, Deduct	*-2.35*	
		For >500, Deduct	*-3.33*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*1.51*	
		For Work In Restricted Working Space, Add	*1.70*	

27 05 29 00-0012 Strut Attachment, Communications And Low Voltage Cable Hooks (J-Hooks) *(27 05 29 00-0001)*

Note: Excludes strut.

27 05 29 00-0013	EA	3/4" Hook Size, Pre-Galvanized Finish, Strut Attachment, Communications And Low Voltage Cable Hook (J-Hook) (Cooper B-line BCH12-SC4)	11.37	2.82
		For >50 To 100, Deduct	*-0.43*	
		For >100 To 250, Deduct	*-0.85*	
		For >250 To 500, Deduct	*-1.56*	
		For >500, Deduct	*-2.27*	
		For Work In Restricted Working Space, Add	*1.70*	
27 05 29 00-0014	EA	1-5/16" Hook Size, Pre-Galvanized Finish, Strut Attachment, Communications And Low Voltage Cable Hook (J-Hook) (Cooper B-line BCH21-SC4)	13.69	2.82
		For >50 To 100, Deduct	*-0.48*	
		For >100 To 250, Deduct	*-0.97*	
		For >250 To 500, Deduct	*-1.73*	
		For >500, Deduct	*-2.50*	
		For Work In Restricted Working Space, Add	*1.70*	
27 05 29 00-0015	EA	2" Hook Size, Pre-Galvanized Finish, Strut Attachment, Communications And Low Voltage Cable Hook (J-Hook) (Cooper B-line BCH32-SC4)	14.89	2.82
		For >50 To 100, Deduct	*-0.51*	
		For >100 To 250, Deduct	*-1.03*	
		For >250 To 500, Deduct	*-1.82*	
		For >500, Deduct	*-2.62*	
		For Work In Restricted Working Space, Add	*1.70*	
27 05 29 00-0016	EA	4" Hook Size, Pre-Galvanized Finish, Strut Attachment, Communications And Low Voltage Cable Hook (J-Hook) (Cooper B-line BCH64-SC4)	20.61	2.82
		For >50 To 100, Deduct	*-0.66*	
		For >100 To 250, Deduct	*-1.31*	
		For >250 To 500, Deduct	*-2.25*	
		For >500, Deduct	*-3.19*	
		For Work In Restricted Working Space, Add	*1.70*	

27 05 29 00-0017 T-Bar Attachment, Communications And Low Voltage Cable Hooks (J-Hooks) *(27 05 29 00-0001)*

Note: Excludes T-Bar.

27 05 29 00-0018	EA	3/4" Hook Size, Pre-Galvanized Finish, T-Bar Attachment, Communications And Low Voltage Cable Hook (J-Hook) (Cooper B-line BCH12-A28)	13.91	2.82
		For >50 To 100, Deduct	*-0.49*	
		For >100 To 250, Deduct	*-0.98*	
		For >250 To 500, Deduct	*-1.75*	
		For >500, Deduct	*-2.52*	
		For Work In Restricted Working Space, Add	*1.70*	
27 05 29 00-0019	EA	1-5/16" Hook Size, Pre-Galvanized Finish, T-Bar Attachment, Communications And Low Voltage Cable Hook (J-Hook) (Cooper B-line BCH21-A28)	17.83	2.82
		For >50 To 100, Deduct	*-0.59*	
		For >100 To 250, Deduct	*-1.17*	
		For >250 To 500, Deduct	*-2.04*	
		For >500, Deduct	*-2.91*	
		For Work In Restricted Working Space, Add	*1.70*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 05 29 00-0020	EA	2" Hook Size, Pre-Galvanized Finish, T-Bar Attachment, Communications And Low Voltage Cable Hook (J-Hook) (Cooper B-line BCH32-A28)	18.85	2.82
		For >50 To 100, Deduct	*-0.61*	
		For >100 To 250, Deduct	*-1.23*	
		For >250 To 500, Deduct	*-2.12*	
		For >500, Deduct	*-3.02*	
		For Work In Restricted Working Space, Add	*1.70*	

27 05 29 00-0021 Plain Or Threaded Rod Clip-On Attachment, Communications And Low Voltage Cable Hooks (J-Hooks) *(27 05 29 00-0001)*

Note: Excludes threaded rod. See CSI section 26 05 29 00-0403 for threaded rod.

27 05 29 00-0022	EA	3/4" Hook Size, Pre-Galvanized Finish, Plain Or Threaded Rod Clip-On Attachment, Communications And Low Voltage Cable Hook (J-Hook) (Cooper B-line BCH12-W6)	11.06	2.82
		For >50 To 100, Deduct	*-0.42*	
		For >100 To 250, Deduct	*-0.84*	
		For >250 To 500, Deduct	*-1.54*	
		For >500, Deduct	*-2.24*	
		For Work In Restricted Working Space, Add	*1.70*	
27 05 29 00-0023	EA	1-5/16" Hook Size, Pre-Galvanized Finish, Plain Or Threaded Rod Clip-On Attachment, Communications And Low Voltage Cable Hook (J-Hook) (Cooper B-line BCH21-W6)	11.59	2.82
		For >50 To 100, Deduct	*-0.43*	
		For >100 To 250, Deduct	*-0.86*	
		For >250 To 500, Deduct	*-1.58*	
		For >500, Deduct	*-2.29*	
		For Work In Restricted Working Space, Add	*1.70*	
27 05 29 00-0024	EA	2" Hook Size, Pre-Galvanized Finish, Plain Or Threaded Rod Clip-On Attachment, Communications And Low Voltage Cable Hook (J-Hook) (Cooper B-line BCH32-W6)	14.31	2.82
		For >50 To 100, Deduct	*-0.50*	
		For >100 To 250, Deduct	*-1.00*	
		For >250 To 500, Deduct	*-1.78*	
		For >500, Deduct	*-2.56*	
		For Work In Restricted Working Space, Add	*1.70*	

27 05 29 00-0025 Threaded Rod Attachment, Communications And Low Voltage Cable Hooks (J-Hooks) *(27 05 29 00-0001)*

Note: Excludes threaded rod, nuts and washers. See CSI section 26 05 29 00-0403 for threaded rod, nuts and washers.

27 05 29 00-0026	EA	1-5/16" Hook Size, Pre-Galvanized Finish, Threaded Rod Attachment, Communications And Low Voltage Cable Hook (J-Hook) (Cooper B-line BCH21-AB)	14.00	2.82
		For >50 To 100, Deduct	*-0.49*	
		For >100 To 250, Deduct	*-0.98*	
		For >250 To 500, Deduct	*-1.76*	
		For >500, Deduct	*-2.53*	
		For Work In Restricted Working Space, Add	*1.70*	
27 05 29 00-0027	EA	2" Hook Size, Pre-Galvanized Finish, Threaded Rod Attachment, Communications And Low Voltage Cable Hook (J-Hook) (Cooper B-line BCH32-AB)	15.27	2.82
		For >50 To 100, Deduct	*-0.52*	
		For >100 To 250, Deduct	*-1.05*	
		For >250 To 500, Deduct	*-1.85*	
		For >500, Deduct	*-2.66*	
		For Work In Restricted Working Space, Add	*1.70*	
27 05 29 00-0028	EA	4" Hook Size, Pre-Galvanized Finish, Threaded Rod Attachment, Communications And Low Voltage Cable Hook (J-Hook) (Cooper B-line BCH64-AB)	21.59	2.82
		For >50 To 100, Deduct	*-0.68*	
		For >100 To 250, Deduct	*-1.36*	
		For >250 To 500, Deduct	*-2.33*	
		For >500, Deduct	*-3.29*	
		For Work In Restricted Working Space, Add	*1.70*	

27 05 29 00-0029 Beam Clamp Attachment, Communications And Low Voltage Cable Hooks (J-Hooks) *(27 05 29 00-0001)*

27 05 29 00-0030	EA	3/4" Hook Size, Pre-Galvanized Finish, Beam Clamp Attachment, Communications And Low Voltage Cable Hook (J-Hook) (Cooper B-line BCH12-C442A)	13.82	2.82
		For >50 To 100, Deduct	*-0.49*	
		For >100 To 250, Deduct	*-0.97*	
		For >250 To 500, Deduct	*-1.74*	
		For >500, Deduct	*-2.51*	
		For Work In Restricted Working Space, Add	*1.70*	
27 05 29 00-0031	EA	1-5/16" Hook Size, Pre-Galvanized Finish, Beam Clamp Attachment, Communications And Low Voltage Cable Hook (J-Hook) (Cooper B-line BCH21-C442A)	16.09	2.82
		For >50 To 100, Deduct	*-0.54*	
		For >100 To 250, Deduct	*-1.09*	
		For >250 To 500, Deduct	*-1.91*	
		For >500, Deduct	*-2.74*	
		For Work In Restricted Working Space, Add	*1.70*	
27 05 29 00-0032	EA	2" Hook Size, Pre-Galvanized Finish, Beam Clamp Attachment, Communications And Low Voltage Cable Hook (J-Hook) (Cooper B-line BCH32-C442A)	17.29	2.82
		For >50 To 100, Deduct	*-0.57*	
		For >100 To 250, Deduct	*-1.15*	
		For >250 To 500, Deduct	*-2.00*	
		For >500, Deduct	*-2.86*	
		For Work In Restricted Working Space, Add	*1.70*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 05 29 00-0033	EA	4" Hook Size, Pre-Galvanized Finish, Beam Clamp Attachment, Communications And Low Voltage Cable Hook (J-Hook) (Cooper B-line BCH64-C442A)	23.88	2.82
		For >50 To 100, Deduct	*-0.74*	
		For >100 To 250, Deduct	*-1.48*	
		For >250 To 500, Deduct	*-2.50*	
		For >500, Deduct	*-3.52*	
		For Work In Restricted Working Space, Add	*1.70*	
27 05 29 00-0034		Adjustable Cable Supports (Caddy® CableCat CAT425) *(27 05 29)*		
27 05 29 00-0035	EA	Wall Mount, 4" To 6" Diameter Loop, Adjustable Cable Support (Caddy® CableCat CAT425)	40.28	3.72
		For >50 To 100, Deduct	*-1.29*	
		For >100 To 250, Deduct	*-2.58*	
		For >250 To 500, Deduct	*-4.43*	
		For >500, Deduct	*-6.28*	
		For Installation On Concrete (Includes Drilling And Fastener), Add	*2.92*	
		For Work In Restricted Working Space, Add	*3.38*	
27 05 29 00-0036	EA	Threaded Rod Or Horizontal Surface Mount, 4" To 6" Diameter Loop, Adjustable Cable Support (Caddy® CableCat CAT425)	41.13	3.72
		For >50 To 100, Deduct	*-1.31*	
		For >100 To 250, Deduct	*-2.62*	
		For >250 To 500, Deduct	*-4.49*	
		For >500, Deduct	*-6.37*	
		For Work In Restricted Working Space, Add	*3.38*	
27 05 29 00-0037	EA	Up To 1/4" Flange, Hammer On Flange Clip, 4" To 6" Diameter Loop, Adjustable Cable Support (Caddy® CableCat CAT425)	45.54	3.72
		For >50 To 100, Deduct	*-1.42*	
		For >100 To 250, Deduct	*-2.84*	
		For >250 To 500, Deduct	*-4.83*	
		For >500, Deduct	*-6.81*	
		For Work In Restricted Working Space, Add	*3.38*	
27 05 29 00-0038	EA	>1/4" To 3/4" Flange, Hammer On Flange Clip, 4" To 6" Diameter Loop, Adjustable Cable Support (Caddy® CableCat CAT425)	40.14	3.72
		For >50 To 100, Deduct	*-1.29*	
		For >100 To 250, Deduct	*-2.57*	
		For >250 To 500, Deduct	*-4.42*	
		For >500, Deduct	*-6.27*	
		For Work In Restricted Working Space, Add	*3.38*	
27 05 29 00-0039	EA	Up To 1/2" Flange, Beam Clamp, 4" To 6" Diameter Loop, Adjustable Cable Support (Caddy® CableCat CAT425)	42.18	3.72
		For >50 To 100, Deduct	*-1.34*	
		For >100 To 250, Deduct	*-2.67*	
		For >250 To 500, Deduct	*-4.57*	
		For >500, Deduct	*-6.47*	
		For Work In Restricted Working Space, Add	*3.38*	
27 05 29 00-0040	EA	>1/2" To 5/8" Flange, Beam Clamp, 4" To 6" Diameter Loop, Adjustable Cable Support (Caddy® CableCat CAT425)	44.21	3.72
		For >50 To 100, Deduct	*-1.39*	
		For >100 To 250, Deduct	*-2.77*	
		For >250 To 500, Deduct	*-4.73*	
		For >500, Deduct	*-6.68*	
		For Work In Restricted Working Space, Add	*3.38*	
27 05 29 00-0041	EA	Up To 1/4" Flange, Hammer On Purlin Clip, 4" To 6" Diameter Loop, Adjustable Cable Support (Caddy® CableCat CAT425)	41.50	3.72
		For >50 To 100, Deduct	*-1.32*	
		For >100 To 250, Deduct	*-2.64*	
		For >250 To 500, Deduct	*-4.52*	
		For >500, Deduct	*-6.41*	
		For Work In Restricted Working Space, Add	*3.38*	

27 05 33 Conduits and Back Boxes for Communications Systems *(27 05)*

See CSI section 26 05 33 00-0000 for conduit and boxes.

27 05 36 Cable Trays for Communications Systems *(27 05)*

See CSI section 26 05 36 00-0000 for cable trays.

27 05 39 Surface Raceways for Communications Systems *(27 05)*

See CSI section 26 05 33 00-0000 for surface raceways.

27 05 43 Underground Ducts and Raceways for Communications Systems *(27 05)*

See CSI section 26 05 43 00-0000 for underground ducts and raceways.

27 05 46 Utility Poles for Communications Systems *(27 05)*

See CSI section 26 05 46 00-0000 for utility poles.

27 05 53 Identification for Communications Systems *(27 05)*

See CSI section 26 05 53 00-0000 for identification.

27 08 Commissioning of Communications *(27)*

See CSI section 01 91 13 00-0001 for commissioning.

27 10 Structured Cabling *(27)*

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

Note: Includes identifying, tagging and testing.

27 11 Communications Equipment Room Fittings *(27 10)*

27 11 16 Communications Cabinets, Racks, Frames, and Enclosures *(27 11)*

See CSI section 26 27 16 00-0000 for cabinets and enclosures.

27 11 16 00-0001 3/4" Fire Retardant Plywood Backboards *(27 11 16)*

27 11 16 00-0002	EA	4' x 4' x 3/4" Fire Retardant Plywood Backboard		96.66	29.33
		For Two Coats Of Non-Conductive, Fire Retardant Paint, Add		*54.40*	
27 11 16 00-0003	EA	4' x 8' x 3/4" Fire Retardant Plywood Backboard		193.32	58.66
		For Two Coats Of Non-Conductive, Fire Retardant Paint, Add		*108.80*	

27 11 16 00-0004 Terminal Cabinets *(27 11 16)*

27 11 16 00-0005	EA	12" x 12" x 4" Phone Terminal Cabinet With Wood Backboard		384.40	84.60
27 11 16 00-0006	EA	18" x 12" x 4" Phone Terminal Cabinet With Wood Backboard		493.56	93.06
27 11 16 00-0007	EA	24" x 12" x 4" Phone Terminal Cabinet With Wood Backboard		567.88	107.16
27 11 16 00-0008	EA	18" x 18" x 4" Phone Terminal Cabinet With Wood Backboard		589.85	109.98
27 11 16 00-0009	EA	24" x 18" x 4" Phone Terminal Cabinet With Wood Backboard		733.87	112.80
27 11 16 00-0010	EA	26" x 36" x 4" Phone Terminal Cabinet With Wood Backboard		915.93	126.90
27 11 16 00-0011	EA	24" x 24" x 6" Phone Terminal Cabinet With Wood Backboard		941.01	124.09
27 11 16 00-0012	EA	30" x 24" x 6" Phone Terminal Cabinet With Wood Backboard		1,199.47	176.76
27 11 16 00-0013	EA	36" x 24" x 6" Phone Terminal Cabinet With Wood Backboard		1,280.16	194.24
27 11 16 00-0014	EA	42" x 24" x 6" Phone Terminal Cabinet With Wood Backboard		1,563.47	205.19
27 11 16 00-0015	EA	30" x 30" x 6" Phone Terminal Cabinet With Wood Backboard		1,291.50	169.20
27 11 16 00-0016	EA	36" x 30" x 6" Phone Terminal Cabinet With Wood Backboard		1,396.56	183.30
27 11 16 00-0017	EA	48" x 30" x 6" Phone Terminal Cabinet With Wood Backboard		1,737.37	234.96
27 11 16 00-0018	EA	54" x 30" x 6" Phone Terminal Cabinet With Wood Backboard		2,079.57	293.73
27 11 16 00-0019	EA	48" x 36" x 6" Phone Terminal Cabinet With Wood Backboard		2,382.68	290.46
27 11 16 00-0020	EA	60" x 36" x 6" Phone Terminal Cabinet With Wood Backboard		2,725.44	353.40

27 11 16 00-0021 Equipment Racks And Cable Managers *(27 11 16)*

27 11 16 00-0022 Equipment Racks *(27 11 16 00-0021)*

Note: Electronics Industries Association EIA-310-D compliant. Includes aluminum construction with clear grained aluminum or black epoxy-polyester hybrid powder coat finish.

27 11 16 00-0023 Standard Equipment Racks *(27 11 16 00-0022)*

27 11 16 00-0024 19" Width, Standard Equipment Racks *(27 11 16 00-0023)*

27 11 16 00-0025	EA	84" Height, 19" Width, 3" Depth, 45U, Standard Equipment Rack (Chatsworth 55053-X03)		551.49	180.48
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add		*9.53*	
27 11 16 00-0026	EA	96" Height, 19" Width, 3" Depth, 51U, Standard Equipment Rack (Chatsworth 55053-X15)		759.50	191.76
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add		*18.80*	
27 11 16 00-0027	EA	108" Height, 19" Width, 3" Depth, 58U, Standard Equipment Rack (Chatsworth 55053-X08)		820.05	203.04
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add		*20.70*	

27 11 16 00-0028 Universal Equipment Racks *(27 11 16 00-0022)*

27 11 16 00-0029 Universal Equipment Racks *(27 11 16 00-0028)*

27 11 16 00-0030 19" Width, EIA Universal Equipment Racks *(27 11 16 00-0029)*

27 11 16 00-0031	EA	36" Height, 19" Width, 3" Depth, 17U, EIA Universal Equipment Rack (Chatsworth 46353-X31)		709.84	157.93
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add		*19.70*	
27 11 16 00-0032	EA	48" Height, 19" Width, 3" Depth, 24U, EIA Universal Equipment Rack (Chatsworth 46353-X20)		774.52	160.74
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add		*22.65*	
27 11 16 00-0033	EA	60" Height, 19" Width, 3" Depth, 31U, EIA Universal Equipment Rack (Chatsworth 46353-X19)		773.80	163.56
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add		*22.33*	
27 11 16 00-0034	EA	66" Height, 19" Width, 3" Depth, 34U, EIA Universal Equipment Rack (Chatsworth 46353-X00)		793.55	166.38
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add		*23.04*	
27 11 16 00-0035	EA	72" Height, 19" Width, 3" Depth, 38U, EIA Universal Equipment Rack (Chatsworth 46353-X01)		813.07	169.20
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add		*23.73*	
27 11 16 00-0036	EA	78" Height, 19" Width, 3" Depth, 41U, EIA Universal Equipment Rack (Chatsworth 46353-X02)		834.19	172.02
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add		*24.51*	
27 11 16 00-0037	EA	84" Height, 19" Width, 3" Depth, 45U, EIA Universal Equipment Rack (Chatsworth 46353-X03)		713.55	174.84
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add		*18.19*	
27 11 16 00-0038	EA	90" Height, 19" Width, 3" Depth, 48U, EIA Universal Equipment Rack (Chatsworth 46353-X05)		875.25	177.66
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add		*26.00*	
27 11 16 00-0039	EA	96" Height, 19" Width, 3" Depth, 51U, EIA Universal Equipment Rack (Chatsworth 46353-X15)		905.88	180.48
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add		*27.25*	
27 11 16 00-0040	EA	102" Height, 19" Width, 3" Depth, 55U, EIA Universal Equipment Rack (Chatsworth 46353-X17)		932.67	183.30
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add		*28.30*	
27 11 16 00-0041	EA	108" Height, 19" Width, 3" Depth, 58U, EIA Universal Equipment Rack (Chatsworth 46353-X08)		939.39	186.12
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add		*28.36*	

27 11 16 00-0042 23" Width, Universal Equipment Racks *(27 11 16 00-0029)*

27 11 16 00-0043	EA	36" Height, 23" Width, 3" Depth, 17U, Universal Equipment Rack (Chatsworth 46383-X31)		750.27	157.93
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add		*21.72*	
27 11 16 00-0044	EA	48" Height, 23" Width, 3" Depth, 24U, Universal Equipment Rack (Chatsworth 46383-X20)		776.02	160.74
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add		*22.73*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 11 16 00-0045	EA	60" Height, 23" Width, 3" Depth, 31U, Universal Equipment Rack (Chatsworth 46383-X19)	798.70	163.56
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*23.58*	
27 11 16 00-0046	EA	66" Height, 23" Width, 3" Depth, 34U, Universal Equipment Rack (Chatsworth 46383-X00)	840.90	166.38
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*25.41*	
27 11 16 00-0047	EA	72" Height, 23" Width, 3" Depth, 38U, Universal Equipment Rack (Chatsworth 46383-X01)	861.82	169.20
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*26.17*	
27 11 16 00-0048	EA	78" Height, 23" Width, 3" Depth, 41U, Universal Equipment Rack (Chatsworth 46383-X02)	884.55	172.02
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*27.03*	
27 11 16 00-0049	EA	84" Height, 23" Width, 3" Depth, 45U, Universal Equipment Rack (Chatsworth 46383-X03)	764.49	174.84
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*20.74*	
27 11 16 00-0050	EA	90" Height, 23" Width, 3" Depth, 48U, Universal Equipment Rack (Chatsworth 46383-X05)	928.70	177.66
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*28.67*	
27 11 16 00-0051	EA	96" Height, 23" Width, 3" Depth, 51U, Universal Equipment Rack (Chatsworth 46383-X15)	961.86	180.48
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*30.05*	
27 11 16 00-0052	EA	102" Height, 23" Width, 3" Depth, 55U, Universal Equipment Rack (Chatsworth 46383-X17)	990.86	183.30
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*31.21*	
27 11 16 00-0053	EA	108" Height, 23" Width, 3" Depth, 58U, Universal Equipment Rack (Chatsworth 46383-X08)	997.67	186.12
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*31.27*	
27 11 16 00-0054		**35" Width, Universal Equipment Racks** *(27 11 16 00-0029)*		
27 11 16 00-0055	EA	72" Height, 35" Width, 3" Depth, 38U, Universal Equipment Rack (Chatsworth 46363-X01)	930.35	169.20
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*29.60*	
27 11 16 00-0056	EA	84" Height, 35" Width, 3" Depth, 45U, Universal Equipment Rack (Chatsworth 46363-X03)	979.41	174.84
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*31.49*	
27 11 16 00-0057		**UL Listed Universal Equipment Racks** *(27 11 16 00-0028)*		
		Note: UL listed as a communications circuit accessory.		
27 11 16 00-0058		**19" Width, UL Listed Universal Equipment Racks** *(27 11 16 00-0057)*		
27 11 16 00-0059	EA	36" Height, 19" Width, 3" Depth, 17U, UL Listed Universal Equipment Rack (Chatsworth 48353-X31)	749.25	157.93
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*21.67*	
27 11 16 00-0060	EA	48" Height, 19" Width, 3" Depth, 24U, UL Listed Universal Equipment Rack (Chatsworth 48353-X20)	809.00	160.74
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*24.38*	
27 11 16 00-0061	EA	60" Height, 19" Width, 3" Depth, 31U, UL Listed Universal Equipment Rack (Chatsworth 48353-X19)	821.43	163.56
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*24.72*	
27 11 16 00-0062	EA	66" Height, 19" Width, 3" Depth, 34U, UL Listed Universal Equipment Rack (Chatsworth 48353-X00)	839.66	166.38
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*25.35*	
27 11 16 00-0063	EA	72" Height, 19" Width, 3" Depth, 38U, UL Listed Universal Equipment Rack (Chatsworth 48353-X01)	860.53	169.20
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*26.11*	
27 11 16 00-0064	EA	78" Height, 19" Width, 3" Depth, 41U, UL Listed Universal Equipment Rack (Chatsworth 48353-X02)	883.20	172.02
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*26.96*	
27 11 16 00-0065	EA	84" Height, 19" Width, 3" Depth, 45U, UL Listed Universal Equipment Rack (Chatsworth 48353-X03)	904.99	174.84
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*27.77*	
27 11 16 00-0066	EA	90" Height, 19" Width, 3" Depth, 48U, UL Listed Universal Equipment Rack (Chatsworth 48353-X05)	927.27	177.66
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*28.60*	
27 11 16 00-0067	EA	96" Height, 19" Width, 3" Depth, 51U, UL Listed Universal Equipment Rack (Chatsworth 48353-X15)	960.39	180.48
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*29.97*	
27 11 16 00-0068	EA	102" Height, 19" Width, 3" Depth, 55U, UL Listed Universal Equipment Rack (Chatsworth 48353-X17)	989.31	183.30
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*31.14*	
27 11 16 00-0069	EA	108" Height, 19" Width, 3" Depth, 58U, UL Listed Universal Equipment Rack (Chatsworth 48353-X08)	996.06	186.12
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*31.19*	
27 11 16 00-0070		**23" Width, UL Listed Universal Equipment Racks** *(27 11 16 00-0057)*		
27 11 16 00-0071	EA	36" Height, 23" Width, 3" Depth, 17U, UL Listed Universal Equipment Rack (Chatsworth 48383-X31)	793.76	157.93
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*23.90*	
27 11 16 00-0072	EA	48" Height, 23" Width, 3" Depth, 24U, UL Listed Universal Equipment Rack (Chatsworth 48383-X20)	869.37	160.74
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*27.39*	
27 11 16 00-0073	EA	60" Height, 23" Width, 3" Depth, 31U, UL Listed Universal Equipment Rack (Chatsworth 48383-X19)	880.52	163.56
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*27.67*	
27 11 16 00-0074	EA	66" Height, 23" Width, 3" Depth, 34U, UL Listed Universal Equipment Rack (Chatsworth 48383-X00)	891.70	166.38
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*27.95*	
27 11 16 00-0075	EA	72" Height, 23" Width, 3" Depth, 38U, UL Listed Universal Equipment Rack (Chatsworth 48383-X01)	914.15	169.20
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*28.79*	
27 11 16 00-0076	EA	78" Height, 23" Width, 3" Depth, 41U, UL Listed Universal Equipment Rack (Chatsworth 48383-X02)	938.61	172.02
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*29.73*	
27 11 16 00-0077	EA	84" Height, 23" Width, 3" Depth, 45U, UL Listed Universal Equipment Rack (Chatsworth 48383-X03)	962.03	174.84
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*30.62*	
27 11 16 00-0078	EA	90" Height, 23" Width, 3" Depth, 48U, UL Listed Universal Equipment Rack (Chatsworth 48383-X05)	986.02	177.66
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*31.53*	
27 11 16 00-0079	EA	96" Height, 23" Width, 3" Depth, 51U, UL Listed Universal Equipment Rack (Chatsworth 48383-X15)	1,021.93	180.48
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*33.05*	
27 11 16 00-0080	EA	102" Height, 23" Width, 3" Depth, 55U, UL Listed Universal Equipment Rack (Chatsworth 48383-X17)	1,053.29	183.30
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*34.33*	
27 11 16 00-0081	EA	108" Height, 23" Width, 3" Depth, 58U, UL Listed Universal Equipment Rack (Chatsworth 48383-X08)	1,060.30	186.12
		For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*34.40*	
27 11 16 00-0082		**4-Post Equipment Racks And Server Frames** *(27 11 16 00-0022)*		
27 11 16 00-0083		**4-Post Equipment Racks** *(27 11 16 00-0082)*		

copyright 2026 The Gordian Group, Inc.

	MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
	27 11 16 00-0084	EA	19" Width, 29" Depth, 84" Height, 4-Post Equipment Rack (Chatsworth 50120-X03)	1,510.87	282.00
			For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*47.34*	
	27 11 16 00-0085	EA	19" Width, 29" Depth, 96" Height, 4-Post Equipment Rack (Chatsworth 50120-X15)	1,648.35	293.28
			For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*53.09*	
	27 11 16 00-0086	EA	19" Width, 29" Depth, 108" Height, 4-Post Equipment Rack (Chatsworth 50120-X08)	1,778.07	304.56
			For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*58.45*	
27 11 16 00-0087			4-Post Server Frame *(27 11 16 00-0082)*		
	27 11 16 00-0088	EA	19" Width, 29" Depth, 84" Height, Server Frame (Chatsworth 15053-X03)	1,552.51	282.00
			For Gray Or Computer Beige Epoxy-Polyester Hybrid Powder Coat Finish, Add	*49.43*	
27 11 16 00-0089			Cable Managers *(27 11 16 00-0021)*		
27 11 16 00-0090			Horizontal Cable Managers *(27 11 16 00-0089)*		
27 11 16 00-0091			Single-Sided, Horizontal Cable Managers *(27 11 16 00-0090)*		
	27 11 16 00-0092	EA	1U Height, 19" Width, 4.96" Depth, Single-Sided, Horizontal Cable Manager (Chatsworth 30139-719)	87.00	11.28
	27 11 16 00-0093	EA	1U Height, 23" Width, 4.96" Depth, Single-Sided, Horizontal Cable Manager (Chatsworth 30139-723)	96.77	11.28
	27 11 16 00-0094	EA	1U Height, 19" Width, 5.9" Depth, Single-Sided, Horizontal Cable Manager (Chatsworth 13930-701)	72.79	11.28
	27 11 16 00-0095	EA	2U Height, 19" Width, 5.14" Depth, Single-Sided, Horizontal Cable Manager (Chatsworth 30130-719)	88.47	11.28
	27 11 16 00-0096	EA	2U Height, 23" Width, 5.14" Depth, Single-Sided, Horizontal Cable Manager (Chatsworth 30130-723)	103.60	11.28
	27 11 16 00-0097	EA	2U Height, 19" Width, 5.9" Depth, Single-Sided, Horizontal Cable Manager (Chatsworth 13930-702)	80.51	11.28
	27 11 16 00-0098	EA	3U Height, 19" Width, 5.14" Depth, Single-Sided, Horizontal Cable Manager (Chatsworth 30131-719)	118.96	11.28
	27 11 16 00-0099	EA	3U Height, 23" Width, 5.14" Depth, Single-Sided, Horizontal Cable Manager (Chatsworth 30131-723)	135.28	11.28
	27 11 16 00-0100	EA	3U Height, 19" Width, 5.9" Depth, Single-Sided, Horizontal Cable Manager (Chatsworth 13930-703)	95.97	11.28
27 11 16 00-0101			Double-Sided, Horizontal Cable Managers *(27 11 16 00-0090)*		
	27 11 16 00-0102	EA	1U Height, 19" Width, 11.73" Depth, Double-Sided, Horizontal Cable Manager (Chatsworth 30529-719)	107.83	11.28
	27 11 16 00-0103	EA	1U Height, 23" Width, 11.73" Depth, Double-Sided, Horizontal Cable Manager (Chatsworth 30529-723)	120.72	11.28
	27 11 16 00-0104	EA	2U Height, 19" Width, 11.73" Depth, Double-Sided, Horizontal Cable Manager (Chatsworth 30530-719)	113.41	11.28
	27 11 16 00-0105	EA	2U Height, 23" Width, 11.73" Depth, Double-Sided, Horizontal Cable Manager (Chatsworth 30530-723)	131.86	11.28
	27 11 16 00-0106	EA	3U Height, 19" Width, 11.73" Depth, Double-Sided, Horizontal Cable Manager (Chatsworth 30531-719)	146.49	11.28
	27 11 16 00-0107	EA	3U Height, 23" Width, 11.73" Depth, Double-Sided, Horizontal Cable Manager (Chatsworth 30531-723)	163.93	11.28
27 11 16 00-0108			Vertical Cable Managers *(27 11 16 00-0089)*		
27 11 16 00-0109			Single-Sided, Vertical Cable Managers *(27 11 16 00-0108)*		
	27 11 16 00-0110	EA	3.6" Width, 9.7" Depth, 70" Height, Single-Sided, Vertical Cable Manager (Chatsworth 13901-701)	194.18	16.92
	27 11 16 00-0111	EA	6" Width, 9.8" Depth, 70" Height, Single-Sided, Vertical Cable Manager (Chatsworth 13902-701)	273.38	16.92
	27 11 16 00-0112	EA	10" Width, 10.3" Depth, 70" Height, Single-Sided, Vertical Cable Manager (Chatsworth 13904-701)	439.51	16.92
	27 11 16 00-0113	EA	12" Width, 10.4" Depth, 70" Height, Single-Sided, Vertical Cable Manager (Chatsworth 13905-701)	497.47	16.92
	27 11 16 00-0114	EA	3.6" Width, 9.7" Depth, 80.5" Height, Single-Sided, Vertical Cable Manager (Chatsworth 13901-703)	207.70	16.92
	27 11 16 00-0115	EA	6" Width, 9.8" Depth, 80.5" Height, Single-Sided, Vertical Cable Manager (Chatsworth 13902-703)	294.63	16.92
	27 11 16 00-0116	EA	10" Width, 10.3" Depth, 80.5" Height, Single-Sided, Vertical Cable Manager (Chatsworth 13904-703)	478.15	16.92
	27 11 16 00-0117	EA	12" Width, 10.4" Depth, 80.5" Height, Single-Sided, Vertical Cable Manager (Chatsworth 13905-703)	536.10	16.92
	27 11 16 00-0118	EA	3.6" Width, 9.7" Depth, 91" Height, Single-Sided, Vertical Cable Manager (Chatsworth 13901-715)	234.74	16.92
	27 11 16 00-0119	EA	6" Width, 9.8" Depth, 91" Height, Single-Sided, Vertical Cable Manager (Chatsworth 13902-715)	323.61	16.92
	27 11 16 00-0120	EA	10" Width, 10.3" Depth, 91" Height, Single-Sided, Vertical Cable Manager (Chatsworth 13904-715)	536.10	16.92
	27 11 16 00-0121	EA	12" Width, 10.4" Depth, 91" Height, Single-Sided, Vertical Cable Manager (Chatsworth 13905-715)	594.06	16.92
27 11 16 00-0122			Double-Sided, Vertical Cable Managers *(27 11 16 00-0108)*		
	27 11 16 00-0123	EA	3.6" Width, 16.4" Depth, 70" Height, Double-Sided, Vertical Cable Manager (Chatsworth 13911-701)	281.11	16.92
	27 11 16 00-0124	EA	6" Width, 16.6" Depth, 70" Height, Double-Sided, Vertical Cable Manager (Chatsworth 13912-701)	331.33	16.92
	27 11 16 00-0125	EA	10" Width, 17.5" Depth, 70" Height, Double-Sided, Vertical Cable Manager (Chatsworth 13914-701)	536.10	16.92
	27 11 16 00-0126	EA	12" Width, 17.8" Depth, 70" Height, Double-Sided, Vertical Cable Manager (Chatsworth 13915-701)	632.69	16.92
	27 11 16 00-0127	EA	3.6" Width, 16.4" Depth, 80.5" Height, Double-Sided, Vertical Cable Manager (Chatsworth 13911-703)	304.29	16.92
	27 11 16 00-0128	EA	6" Width, 16.6" Depth, 80.5" Height, Double-Sided, Vertical Cable Manager (Chatsworth 13912-703)	354.52	16.92
	27 11 16 00-0129	EA	10" Width, 17.5" Depth, 80.5" Height, Double-Sided, Vertical Cable Manager (Chatsworth 13914-703)	574.74	16.92
	27 11 16 00-0130	EA	12" Width, 17.8" Depth, 80.5" Height, Double-Sided, Vertical Cable Manager (Chatsworth 13915-703)	671.33	16.92
	27 11 16 00-0131	EA	3.6" Width, 16.4" Depth, 91" Height, Double-Sided, Vertical Cable Manager (Chatsworth 13911-715)	335.20	16.92
	27 11 16 00-0132	EA	6" Width, 16.6" Depth, 91" Height, Double-Sided, Vertical Cable Manager (Chatsworth 13912-715)	385.42	16.92
	27 11 16 00-0133	EA	10" Width, 17.5" Depth, 91" Height, Double-Sided, Vertical Cable Manager (Chatsworth 13914-715)	632.69	16.92
	27 11 16 00-0134	EA	12" Width, 17.8" Depth, 91" Height, Double-Sided, Vertical Cable Manager (Chatsworth 13915-715)	729.28	16.92
27 11 16 00-0135			Accessories For Vertical Cable Managers *(27 11 16 00-0108)*		
	27 11 16 00-0136	EA	Cable Ring Kit For 3.6" Width x 70" Height, Vertical Cable Managers (Chatsworth 13934-716)	119.15	11.28
	27 11 16 00-0137	EA	Cable Ring Kit For 3.6" Width x 80.5" Height, Vertical Cable Managers (Chatsworth 13934-717)	126.88	11.28
	27 11 16 00-0138	EA	Cable Ring Kit For 3.6" Width x 91" Height, Vertical Cable Managers (Chatsworth 13934-718)	134.60	11.28
	27 11 16 00-0139	EA	Cable Ring Kit For 6" Width x 70" Height, Vertical Cable Managers (Chatsworth 13934-726)	123.01	11.28
	27 11 16 00-0140	EA	Cable Ring Kit For 6" Width x 80.5" Height, Vertical Cable Managers (Chatsworth 13934-727)	134.60	11.28
	27 11 16 00-0141	EA	Cable Ring Kit For 6" Width x 91" Height, Vertical Cable Managers (Chatsworth 13934-728)	146.19	11.28
	27 11 16 00-0142	EA	Cable Ring Kit For 10" Width x 70" Height, Vertical Cable Managers (Chatsworth 13934-746)	138.47	11.28
	27 11 16 00-0143	EA	Cable Ring Kit For 10" Width x 80.5" Height, Vertical Cable Managers (Chatsworth 13934-747)	150.06	11.28
	27 11 16 00-0144	EA	Cable Ring Kit For 10" Width x 91" Height, Vertical Cable Managers (Chatsworth 13934-748)	161.65	11.28
	27 11 16 00-0145	EA	Cable Ring Kit For 12" Width x 70" Height, Vertical Cable Managers (Chatsworth 13934-756)	146.19	11.28

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 11 16 00-0146	EA	Cable Ring Kit For 12" Width x 80.5" Height, Vertical Cable Managers (Chatsworth 13934-757)	161.65	11.28
27 11 16 00-0147	EA	Cable Ring Kit For 12" Width x 91" Height, Vertical Cable Managers (Chatsworth 13934-758)	173.24	11.28
27 11 16 00-0148	EA	Cable Lashing Bar Kit For Vertical Cable Managers (Chatsworth 13928-001)	99.83	11.28
27 11 16 00-0149	EA	Cable Spool Kit For Vertical Cable Managers (Chatsworth 13935-701)	115.29	11.28
27 11 16 00-0150	EA	Cable Distribution Spools For Vertical Cable Managers (Chatsworth 15008-001)	120.50	11.28
27 11 16 00-0151	EA	Cable Distribution Spool Spacer Kit For Vertical Cable Managers (Chatsworth 35505-001)	76.65	11.28

27 11 19 Communications Termination Blocks and Patch Panels *(27 11)*

Note: The terminating, testing, and labeling of the cables in question should be done according to the task description as well as the current contract specifications. See CSI section 26 05 53 00-0020 for labeling.

27 11 19 00-0001 Computer Network Components *(27 11 19)*

27 11 19 00-0002 Ethernet Patch Panels *(27 11 19 00-0001)*

27 11 19 00-0003	EA	12 Port, Category 5E Patch Panel	240.00	56.40
27 11 19 00-0004	EA	24 Port, Category 5E Patch Panel	348.53	56.40
27 11 19 00-0005	EA	32 Port, Category 5E Patch Panel	451.23	56.40
27 11 19 00-0006	EA	48 Port, Category 5E Patch Panel	546.92	56.40
27 11 19 00-0007	EA	64 Port, Category 5E Patch Panel	859.88	70.50
27 11 19 00-0008	EA	96 Port, Category 5E Patch Panel	1,004.77	84.60
27 11 19 00-0009	EA	12 Port, Category 6 Patch Panel	324.26	56.40
27 11 19 00-0010	EA	24 Port, Category 6 Patch Panel	355.54	56.40
27 11 19 00-0011	EA	48 Port, Category 6 Patch Panel	598.27	56.40
27 11 19 00-0012	EA	96 Port, Category 6 Patch Panel	1,102.80	84.60
27 11 19 00-0013	EA	16" x 12" x 8" Steel Enclosure, Type 12, Hinged, Lockable (Hoffman A161208LP)	795.40	84.60
27 11 19 00-0014	EA	16" x 16" x 6" Steel Enclosure, Type 12, Hinged, Lockable (Hoffman A161606LP)	833.84	84.60
27 11 19 00-0015	EA	12 Port, Category 6 Modular to 110 Mini Patch Panel (Ortronics-Legrand OR-PMP61289)	274.80	56.40
27 11 19 00-0016	EA	Terminate One End Of A 4 Pair Cable To Category "X" Specifications	39.97	
		For >5 To 10 Cables, Deduct	*-7.19*	
		For >10 Cables, Deduct	*-15.99*	
27 11 19 00-0017	EA	Terminate One End Of A Twisted Pair Of Wires Note: Per each pair	10.99	
		For >20 To 40 Pairs, Deduct	*-1.76*	
		For >40 Pairs, Deduct	*-4.18*	

27 11 19 00-0018 Fiber Optic Cable Patch Panels And Enclosures *(27 11 19 00-0001)*

27 11 19 00-0019 Fiber Optic Cable Connector Housings *(27 11 19 00-0018)*

27 11 19 00-0020 Wall Mount, Fiber Optic Cable Connector Housings *(27 11 19 00-0019)*

Note: Includes mounting hardware. Excludes connector panels. See CSI section 27 11 19 00-0048 for connector panels.

27 11 19 00-0021	EA	1-Panel Capacity, Wall Mount, Fiber Optic Cable Connector Housing	134.13	25.38
27 11 19 00-0022	EA	2-Panel Capacity, Wall Mount, Fiber Optic Cable Connector Housing	199.02	25.38
27 11 19 00-0023	EA	4-Panel Capacity, Wall Mount, Fiber Optic Cable Connector Housing	295.02	25.38
27 11 19 00-0024	EA	6-Panel Capacity, Wall Mount, Fiber Optic Cable Connector Housing	435.77	42.30
27 11 19 00-0025	EA	12-Panel Capacity, Wall Mount, Fiber Optic Cable Connector Housing	606.69	42.30

27 11 19 00-0026 Rack Mount, Fiber Optic Cable Connector Housings *(27 11 19 00-0019)*

Note: Includes mounting hardware. Excludes connector panels. See CSI section 27 11 19 00-0048 for connector panels.

27 11 19 00-0027	EA	2-Panel Capacity, Rack Mount, Fiber Optic Cable Connector Housing	461.61	42.30
27 11 19 00-0028	EA	4-Panel Capacity, Rack Mount, Fiber Optic Cable Connector Housing	518.46	42.30
27 11 19 00-0029	EA	6-Panel Capacity, Rack Mount, Fiber Optic Cable Connector Housing	558.32	42.30
27 11 19 00-0030	EA	12-Panel Capacity, Rack Mount, Fiber Optic Cable Connector Housing	654.63	42.30

27 11 19 00-0031 Rack Mount, Fiber Optic Cable Pretium® Connector Housings *(27 11 19 00-0019)*

Note: Includes mounting hardware. Excludes connector panels. See CSI section 27 11 19 00-0048 for connector panels.

27 11 19 00-0032	EA	2-Panel Capacity, Rack Mount, Fiber Optic Cable Pretium® Connector Housing	564.98	42.30
		For Splice Tray Bracket, Add	*84.85*	
27 11 19 00-0033	EA	4-Panel Capacity, Rack Mount, Fiber Optic Cable Pretium® Connector Housing	661.91	42.30
		For Splice Tray Bracket, Add	*92.78*	
27 11 19 00-0034	EA	12-Panel Capacity, Rack Mount, Fiber Optic Cable Pretium® Connector Housing	825.28	42.30
		For Splice Tray Bracket, Add	*338.02*	

27 11 19 00-0035 Rack Mount, Fiber Optic Cable Pretium Edge® Connector Housings *(27 11 19 00-0019)*

Note: Includes mounting hardware. Excludes connector panels. See CSI section 27 11 19 00-0048 for connector panels.

27 11 19 00-0036	EA	8 Pretium Edge® Module Or Panel Capacity, Rack Mount, Fiber Optic Cable Pretium Edge® Connector Housing	974.67	42.30
27 11 19 00-0037	EA	12 Pretium Edge® Module Or Panel Capacity, Rack Mount, Fiber Optic Cable Pretium Edge® Connector Housing	1,255.96	42.30
27 11 19 00-0038	EA	24 Pretium Edge® Module Or Panel Capacity, Rack Mount, Fiber Optic Cable Pretium Edge® Connector Housing	1,426.47	42.30
27 11 19 00-0039	EA	48 Pretium Edge® Module Or Panel Capacity, Rack Mount, Fiber Optic Cable Pretium Edge® Connector Housing	1,861.35	42.30

27 11 19 00-0040 Wall Mount, Fiber Optic Cable Industrial Connector Housings *(27 11 19 00-0019)*

Note: Includes powder-coat finish, pad lockable outer door and mounting hardware. Excludes connector panels. See CSI section 27 11 19 00-0048 for connector panels.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 11 19 00-0041	EA	2-Panel Capacity, Wall Mount, Fiber Optic Cable Industrial Connector Housing	640.32	25.38
27 11 19 00-0042	EA	6-Panel Capacity, Wall Mount, Fiber Optic Cable Industrial Connector Housing	885.68	42.30
27 11 19 00-0043	EA	12-Panel Capacity, Wall Mount, Fiber Optic Cable Industrial Connector Housing	929.45	42.30
27 11 19 00-0044		**Wall Mount, Fiber Optic Cable Environmental Connector Housings** *(27 11 19 00-0019)*		
		Note: Includes NEMA 4X enclosure, pad lockable outer door and mounting hardware. Excludes connector panels. See CSI section 27 11 19 00-0048 for connector panels.		
27 11 19 00-0045	EA	2-Panel Capacity, Wall Mount, Fiber Optic Cable Environmental Connector Housing	670.56	25.38
27 11 19 00-0046	EA	6-Panel Capacity, Wall Mount, Fiber Optic Cable Environmental Connector Housing	885.15	42.30
27 11 19 00-0047	EA	12-Panel Capacity, Wall Mount, Fiber Optic Cable Environmental Connector Housing	1,039.98	42.30
27 11 19 00-0048		**Fiber Optic Cable Connector Panels** *(27 11 19 00-0018)*		
27 11 19 00-0049		**SC Simplex, Fiber Optic Cable Connector Panels** *(27 11 19 00-0048)*		
27 11 19 00-0050	EA	6-Fiber, Multimode, SC Simplex, Fiber Optic Cable Connector Panel	88.11	5.64
27 11 19 00-0051	EA	6-Fiber, Singlemode, SC Simplex, Fiber Optic Cable Connector Panel	95.63	5.64
27 11 19 00-0052	EA	8-Fiber, Multimode, SC Simplex, Fiber Optic Cable Connector Panel	107.28	5.64
27 11 19 00-0053	EA	8-Fiber, Singlemode, SC Simplex, Fiber Optic Cable Connector Panel	117.30	5.64
27 11 19 00-0054	EA	12-Fiber, Multimode, SC Simplex, Fiber Optic Cable Connector Panel	145.66	5.64
27 11 19 00-0055	EA	12-Fiber, Singlemode, SC Simplex, Fiber Optic Cable Connector Panel	160.63	5.64
27 11 19 00-0056		**SC Duplex, Fiber Optic Cable Connector Panels** *(27 11 19 00-0048)*		
27 11 19 00-0057	EA	6-Fiber, Multimode, SC Duplex, Fiber Optic Cable Connector Panel	84.79	5.64
27 11 19 00-0058	EA	6-Fiber, Singlemode, SC Duplex, Fiber Optic Cable Connector Panel	86.56	5.64
27 11 19 00-0059	EA	8-Fiber, Multimode, SC Duplex, Fiber Optic Cable Connector Panel	102.88	5.64
27 11 19 00-0060	EA	8-Fiber, Singlemode, SC Duplex, Fiber Optic Cable Connector Panel	105.23	5.64
27 11 19 00-0061	EA	12-Fiber, Multimode, SC Duplex, Fiber Optic Cable Connector Panel	139.05	5.64
27 11 19 00-0062	EA	12-Fiber, Singlemode, SC Duplex, Fiber Optic Cable Connector Panel	142.54	5.64
27 11 19 00-0063		**LC Duplex, Fiber Optic Cable Connector Panels** *(27 11 19 00-0048)*		
27 11 19 00-0064	EA	6-Fiber, Multimode, LC Duplex, Fiber Optic Cable Connector Panel	124.20	5.64
27 11 19 00-0065	EA	6-Fiber, Singlemode, LC Duplex, Fiber Optic Cable Connector Panel	136.64	5.64
27 11 19 00-0066	EA	8-Fiber, Multimode, LC Duplex, Fiber Optic Cable Connector Panel	152.77	5.64
27 11 19 00-0067	EA	8-Fiber, Singlemode, LC Duplex, Fiber Optic Cable Connector Panel	169.38	5.64
27 11 19 00-0068	EA	12-Fiber, Multimode, LC Duplex, Fiber Optic Cable Connector Panel	152.57	5.64
27 11 19 00-0069	EA	12-Fiber, Singlemode, LC Duplex, Fiber Optic Cable Connector Panel	170.25	5.64
27 11 19 00-0070	EA	16-Fiber, Multimode, LC Duplex, Fiber Optic Cable Connector Panel	267.18	5.64
27 11 19 00-0071	EA	16-Fiber, Singlemode, LC Duplex, Fiber Optic Cable Connector Panel	300.33	5.64
27 11 19 00-0072	EA	24-Fiber, Multimode, LC Duplex, Fiber Optic Cable Connector Panel	381.54	5.64
27 11 19 00-0073	EA	24-Fiber, Singlemode, LC Duplex, Fiber Optic Cable Connector Panel	282.77	5.64
27 11 19 00-0074		**ST Simplex, Fiber Optic Cable Connector Panels** *(27 11 19 00-0048)*		
27 11 19 00-0075	EA	6-Fiber, Multimode, ST Simplex, Fiber Optic Cable Connector Panel	73.24	5.64
27 11 19 00-0076	EA	6-Fiber, Singlemode, ST Simplex, Fiber Optic Cable Connector Panel	78.92	5.64
27 11 19 00-0077	EA	8-Fiber, Multimode, ST Simplex, Fiber Optic Cable Connector Panel	87.46	5.64
27 11 19 00-0078	EA	8-Fiber, Singlemode, ST Simplex, Fiber Optic Cable Connector Panel	95.05	5.64
27 11 19 00-0079	EA	12-Fiber, Multimode, ST Simplex, Fiber Optic Cable Connector Panel	115.89	5.64
27 11 19 00-0080	EA	12-Fiber, Singlemode, ST Simplex, Fiber Optic Cable Connector Panel	127.28	5.64
27 11 19 00-0081		**MT-RJ, Fiber Optic Cable Connector Panels** *(27 11 19 00-0048)*		
27 11 19 00-0082	EA	12-Fiber, Multimode, MT-RJ, Fiber Optic Cable Connector Panel	91.04	5.64
27 11 19 00-0083	EA	12-Fiber, Singlemode, MT-RJ, Fiber Optic Cable Connector Panel	136.23	5.64
27 11 19 00-0084		**Blank Plates, Fiber Optic Cable Connector Panels** *(27 11 19 00-0048)*		
27 11 19 00-0085	EA	Blank Plate For Fiber Optic Cable Connector Panel Or Enclosures (Leviton 5F100-PLT)	24.37	5.65
27 11 19 00-0086		**Fiber Optic Cable Pretium Edge® Modules** *(27 11 19 00-0048)*		
27 11 19 00-0087	EA	12-Fiber, Singlemode, LC Duplex To MTP, Fiber Optic Cable Pretium Edge® Module	1,098.68	5.64
27 11 19 00-0088	EA	12-Fiber, Multimode, LC Duplex To MTP, Fiber Optic Cable Pretium Edge® Module	1,102.51	5.64
27 11 19 00-0089		**Fiber Optic Cable Splice Housings** *(27 11 19 00-0018)*		
27 11 19 00-0090		**Wall Mount, Fiber Optic Cable Splice Housings** *(27 11 19 00-0089)*		
		Note: Includes mounting hardware. Excludes splice trays.		
27 11 19 00-0091	EA	12 Splice Tray Capacity, Wall Mount, Fiber Optic Splice Housing With Locking Door	396.09	56.40
27 11 19 00-0092		**Rack Mount, Fiber Optic Cable Splice Housings** *(27 11 19 00-0089)*		
		Note: Includes mounting hardware. Excludes splice trays.		
27 11 19 00-0093	EA	12 Splice Tray Capacity, Rack Mount, Fiber Optic Cable Splice Housing	608.43	42.30
27 11 19 00-0094	EA	22 Splice Tray Capacity, Rack Mount, Fiber Optic Cable Splice Housing	637.22	42.30

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 11 19 00-0095		**Fiber Optic Cable Splice Trays** *(27 11 19 00-0089)*		
27 11 19 00-0096	EA	Fiber Optic Cable Splice Tray	114.89	14.10
27 11 19 00-0097		**Fiber Optic Cable Jumper Management Panels** *(27 11 19 00-0018)*		
		Note: Includes mounting hardware.		
27 11 19 00-0098	EA	Rack Mount, Fiber Optic Cable Jumper Management Panel	211.25	42.30
27 11 19 00-0099		**Miscellaneous Accessories** *(27 11 19 00-0001)*		
27 11 19 00-0100	EA	Wall Mount Bracket For 12 Or 24 Port Patch Panel	62.35	
27 11 19 00-0101	EA	Wall Mount Bracket For 32 Or 48 Port Patch Panel	82.79	
27 11 19 00-0102	EA	Wall Mount Bracket For 64 Or 72 Port Patch Panel	90.57	
27 11 19 00-0103	EA	Wall Mount Bracket For 96 Port Patch Panel	101.00	
27 11 19 00-0104	EA	Lightning Protection Plus Stainless Steel Modules, Siemon	543.35	56.40
27 11 19 00-0105		**Telephone Components** *(27 11 19)*		
27 11 19 00-0106		**Terminal Blocks With Wide Range Of 22-8 AWG** *(27 11 19 00-0105)*		
27 11 19 00-0107	EA	Terminal Block, Circuit Isolation Switch With Wire Range 22-8 AWG	34.90	11.30
27 11 19 00-0108	EA	Terminal Block, Fuse Holder 600 Volt, 6.3 Amperes With Wire Range 22-8 AWG	70.23	11.30
27 11 19 00-0109	EA	Terminal Block, Fuse Holder 600 Volt, 10 Amperes With Wire Range 22-8 AWG	55.77	11.30
27 11 19 00-0110	EA	Terminal Block, Solderless Box With Lugs And Wire Range 22-8 AWG	26.29	11.30
27 11 19 00-0111	EA	Flat Terminal Block Connection With Wire Range 22-8 AWG	18.59	7.91
27 11 19 00-0112	EA	Ground Terminal Block With Wire Range 22-8 AWG	36.43	11.30
27 11 19 00-0113	EA	Terminal Block, Solderless Box With Lug 600 Volt, 60 Amperes With Wire Range 22-8 AWG	26.29	11.30
27 11 19 00-0114	EA	Terminal Block, Mini Box Lug 300 Volt, 30 Amperes With Wire Range 22-8 AWG	18.37	7.91
27 11 19 00-0115	EA	Flat Terminal Block Connection 300 Volt, 20 Amperes With Wire Range 22-8 AWG	18.21	7.91
27 11 19 00-0116	EA	Self Lifting Terminal Block, 300 Volt, 40 Amperes, Wire Connection With Wire Range 22-12 AWG	18.91	7.91
27 11 19 00-0117		**Terminal Block Mounting Channel** *(27 11 19 00-0105)*		
27 11 19 00-0118	EA	Terminal Block Mounting Channel, .5 M Galvanized Steel	18.57	5.65
27 11 19 00-0119	EA	Terminal Block Mounting Channel, 1 M Galvanized Steel	24.44	5.65
27 11 19 00-0120	EA	Terminal Block Mounting Channel, 2 M Galvanized Steel	34.83	5.65
27 11 19 00-0121	EA	Terminal Block Mounting Channel, .5 M Bi-Chrome Zinc	24.06	6.78
27 11 19 00-0122	EA	Terminal Block Mounting Channel, 1 M Bi-Chrome Zinc	33.85	6.78
27 11 19 00-0123	EA	Terminal Block Mounting Channel, 2 M Bi-Chrome Zinc	50.14	6.78
27 11 19 00-0124		**Outlet Termination Hardware** *(27 11 19 00-0105)*		
27 11 19 00-0125	EA	Telephone Outlet Blocks	37.72	5.65
27 11 19 00-0126	EA	Phone Outlet Block For Floor Box	96.18	42.86
		Note: Excludes box.		
27 11 19 00-0127	EA	Fiber Optic "SC" Type Modular Bulkhead	89.06	25.38
27 11 19 00-0128	EA	Fiber Optic "ST" Type Modular Bulkhead	89.06	25.38
27 11 19 00-0129	EA	Type "F" Coaxial Connector Male	51.39	16.92
27 11 19 00-0130	EA	Modular Plate For 3-RJ-45, 4 - "SC" And 1 -"F" Connector	137.78	28.20
27 11 19 00-0131	EA	Modular Plate For 3-RJ-45, 4 - "ST" And 1 -"F" Connector	137.78	28.20
27 11 19 00-0132	EA	Access Floor Box With 3-RJ-45, 4 - "SC" And 1 -"F" Connector	168.10	28.20
27 11 19 00-0133	EA	Access Floor Box With 3-RJ-45, 4 - "ST" And 1 -"F" Connector	168.10	28.20
27 11 19 00-0134	EA	Access Floor Box With 2-RJ-45, 4 - "SC" And 1 -25 Pin Connector	152.14	28.20
27 11 19 00-0135	EA	Terminal Type - Punch Down Block 110 Type - 300 Pair Category 5	1,354.32	141.01
27 11 19 00-0136	EA	Wiring (Punch Down) Block with Stand-Off Legs, 100 Pair, Category V	63.86	11.28
		Note: Excludes cable terminations.		
27 11 19 00-0137	EA	5-Pair, Connecting Block	3.73	1.13
27 11 19 00-0138	EA	4-Pair, Connecting Block	4.07	1.13
27 11 19 00-0139	EA	Plastic Label Holder, Transparent	15.06	2.82
27 11 19 00-0140	EA	Marked Label, White, 5-Pair	3.99	
27 11 19 00-0141	EA	Marked Label, Blue, 4-Pair	3.99	
27 11 19 00-0142		**Terminations in Manhole or Junction Box** *(27 11 19 00-0105)*		
27 11 19 00-0143	EA	25 Pair Cable Termination In Manhole Or Junction Box	180.48	
27 11 19 00-0144	EA	50 Pair Cable Termination In Manhole Or Junction Box	360.96	
27 11 19 00-0145	EA	100 Pair Cable Termination In Manhole Or Junction Box	721.93	
27 11 19 00-0146	EA	150 Pair Cable Termination In Manhole Or Junction Box	1,082.89	
27 11 19 00-0147	EA	200 Pair Cable Termination In Manhole Or Junction Box	1,266.75	
27 11 19 00-0148	EA	300 Pair Cable Termination In Manhole Or Junction Box	1,899.56	
27 11 19 00-0149	EA	400 Pair Cable Termination In Manhole Or Junction Box	2,389.11	
27 11 19 00-0150	EA	500 Pair Cable Termination In Manhole Or Junction Box	2,986.96	
27 11 19 00-0151	EA	750 Pair Cable Termination In Manhole Or Junction Box	4,480.41	
27 11 19 00-0152	EA	1,000 Pair Cable Termination In Manhole Or Junction Box	5,433.55	
27 11 19 00-0153	EA	1,200 Pair Cable Termination In Manhole Or Junction Box	6,192.79	

27 11 23 Communications Cable Management and Ladder Rack *(27 11)*

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 11 23 00-0001		Equipment Supports *(27 11 23)*		
27 11 23 00-0002	EA	12" x 5'-11" Tubular Runway	123.77	27.07
27 11 23 00-0003	EA	12" x 9'-11" Tubular Runway	213.22	45.12
27 11 23 00-0004	EA	Shelf Bracket Support For Tubular Runway	39.09	8.46
27 11 23 00-0005	EA	Straight Clamp Hardware For Tubular Runway	15.86	5.64
27 11 23 00-0006	EA	Corner Clamp Hardware For Tubular Runway	17.00	5.64
27 11 23 00-0007	EA	90 Degree Edge Clamp Hardware For Tubular Runway	40.20	10.15
27 11 23 00-0008	EA	Wall Angle Assembly Hardware For 12" Wide Tubular Runway	87.58	16.92
27 11 23 00-0009	EA	J-Bolt Hardware For Tubular Runway	7.62	2.49
27 11 23 00-0010	EA	T Bracket Hardware For Tubular Runway	43.87	14.10
27 11 23 00-0011	LF	Velcro CMP	2.89	1.13
27 11 23 00-0012	EA	110 Jumper Trough (Commscope 107831133)	32.81	5.64
27 11 23 00-0013	EA	2" J-Hook, Cable Or Rod Attachment (Cooper B-Line BCH32-W6)	14.27	2.82
27 11 23 00-0014	EA	4" J-Hook, Screw Attachment (Cooper B-Line BCH64)	18.47	2.82
27 11 23 00-0015	EA	Stringer Multi-Function Clip (Cooper B-Line BW6S)	7.49	2.82
27 11 23 00-0016	EA	Black Neoprene Protective Cover For Cable Tray Stringers (Cooper B-Line SB21B)	70.68	2.82
27 11 23 00-0017	EA	3" Channel Rack-To-Cable Tray Mounting Plate For 9" To 12" Wide Cable Tray (Chatsworth 10595-712)	126.29	28.25
27 11 23 00-0018	EA	19" Wide, 11.73" Deep, Double Sided, Horizontal Wire Manager (Chatsworth 30530-719)	175.08	11.30
27 11 23 00-0019	EA	7' High, 10" Wide, 16.15" Deep, Double Sided, Vertical Wire Manager (Chatsworth 30096-703)	1,630.31	16.95
27 11 23 00-0020	EA	7' High, 10" Wide, 8.08" Deep, Vertical Wire Manager (Chatsworth 30093-703)	1,146.20	16.95
27 11 23 00-0021	EA	7' High, 19" Wide, 45U Standard EIA Rack (Chatsworth 55053-703)	437.15	113.00
27 11 23 00-0022	EA	Rack Base Dust Cover For 19" Wide, 3" Deep Two Post Racks (Chatsworth 41050-719)	69.38	1.13
27 11 23 00-0023	EA	Environmental Enclosure, NEMA 4x SS, 6' Free Standing	31,797.44	888.83
27 11 23 00-0024	EA	DVR Enclosure	2,181.64	222.18
27 11 23 00-0025	EA	Wall Mount Type 4X Enclosure 24.00x30.00x8.00 Stainless Steel Type 316	8,189.12	444.38
27 11 23 00-0026	EA	Panel, NEMA 12/27.00x21.00	564.50	111.09
27 11 23 00-0027	EA	Panel, NEMA 12/8.75x6.88	144.44	111.09
27 11 23 00-0028	EA	Clamp Assembly, Fast Opening, Stainless Steel Type 304	197.80	111.09
27 11 23 00-0029	EA	Wall-Mount Type 4x Enclosure 24.00x30.00x8.00 Stainless Steel Type 316	7,411.46	111.09

27 13 Communications Backbone Cabling *(27 10)*

27 13 13 Communications Copper Backbone Cabling *(27 13)*

27 13 13 13 Communications Copper Cable Splicing and Terminations *(27 13 13)*

27 13 13 13-0001		Modular Plugs For Copper Communications Cable *(27 13 13 13)*		
27 13 13 13-0002	EA	Modular Plug For Non Shielded Copper Communications Cable Note: Up to 8-position/8-contact non-shielded modular plug for solid or stranded wire. Includes termination.	29.07	
		For >5 To 10, Deduct	*-3.38*	
		For >10, Deduct	*-6.75*	
27 13 13 13-0003	EA	Modular Plug For Shielded Copper Communications Cable Note: Up to 8-position/8-contact shielded modular plug for solid or stranded wire. Includes termination.	33.28	
		For >5 To 10, Deduct	*-3.80*	
		For >10, Deduct	*-7.60*	
27 13 13 13-0004		Communications Termination Blocks *(27 13 13 13)*		
27 13 13 13-0005	EA	100-Pair, 110 Block With Legs	61.10	14.10
27 13 13 13-0006	EA	300-Pair, 110 Block With Legs	108.95	14.10
27 13 13 13-0007	EA	Clear Label Holder For 110 Wiring Block	12.21	5.64
27 13 13 13-0008	EA	4-Pair, 110C Connecting Block	7.09	2.82
27 13 13 13-0009	EA	5-Pair, 110C Connecting Block	7.26	2.82
27 13 13 13-0010	EA	100-Pair, 110 Jack Panel System Note: Includes twelve 8-pin modular jacks and mounting legs.	363.54	16.92
27 13 13 13-0011	EA	300-Pair, 110 Jack Panel System Note: Includes twelve 8-pin modular jacks and mounting legs.	591.27	16.92
27 13 13 13-0012		Testing And Certification Of Copper Communications Cable *(27 13 13 13)* Note: Use for existing systems.		
27 13 13 13-0013	EA	Test 1-Pair Of A Copper Communications Cable For Continuity	5.64	
		For >25-Pair, Deduct	*-2.25*	
27 13 13 13-0014	EA	Certify 1-Pair Of A Copper Communications Cable	8.46	
		For >25-Pair, Deduct	*-3.38*	
27 13 13 13-0015	EA	Certify And Document 1-Pair Of A Copper Communications Cable	13.53	
		For >25-Pair, Deduct	*-5.40*	
27 13 13 13-0016	EA	Test 4-Pair Category 5-7 Telecommunications Cable For Continuity	22.56	
		For >25-Pair, Deduct	*-9.00*	
27 13 13 13-0017	EA	Certify 4-Pair Category 5-7 Telecommunications Cable	33.84	
		For >25-Pair, Deduct	*-13.50*	
27 13 13 13-0018	EA	Certify And Document 4-Pair Category 5-7 Telecommunications Cable	54.15	
		For >25-Pair, Deduct	*-21.61*	
27 13 13 13-0019		Building Entrance Terminals *(27 13 13 13)*		
27 13 13 13-0020	EA	25 Pair Gas Protective Unit Assembly Complete With Gas Protector	2,883.11	247.33
27 13 13 13-0021	EA	50 Pair Gas Protective Unit Assembly Complete With Gas Protector	3,788.38	412.21
27 13 13 13-0022	EA	100 Pair Gas Protective Unit Assembly Complete With Gas Protector	5,304.41	660.04

copyright 2026 The Gordian Group, Inc.

	MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
	27 13 23		**Communications Optical Fiber Backbone Cabling** *(27 13)*		
	27 13 23 13		**Communications Optical Fiber Splicing and Terminations** *(27 13 23)*		
	27 13 23 13-0001		Fiber Optic Cable Connectors *(27 13 23 13)*		
	27 13 23 13-0002	EA	ST Connector For Multimode Fiber Optic Cable	35.98	
	27 13 23 13-0003	EA	ST Connector For Singlemode Fiber Optic Cable	42.65	
	27 13 23 13-0004	EA	SC Connector For Multimode Fiber Optic Cable	40.92	
	27 13 23 13-0005	EA	SC Connector For Singlemode Fiber Optic Cable	49.43	
	27 13 23 13-0006	EA	LC Connector For Multimode Fiber Optic Cable	56.80	
	27 13 23 13-0007	EA	LC Connector For Singlemode Fiber Optic Cable	58.79	
	27 13 23 13-0008	EA	MT-RJ Connector For Multimode Fiber Optic Cable	89.52	
	27 13 23 13-0009		Fiber Optic Cable Fan Out Kits *(27 13 23 13)*		
	27 13 23 13-0010		Buffer Tube Fan Out Kits For Fiber Optic Cable *(27 13 23 13-0009)*		
	27 13 23 13-0011	EA	6-Fiber, Indoor Buffer Tube Fan Out Kit For Fiber Optic Cable	248.35	
	27 13 23 13-0012	EA	12-Fiber, Indoor Buffer Tube Fan Out Kit For Fiber Optic Cable	252.69	
	27 13 23 13-0013	EA	6-Fiber, Outdoor Buffer Tube Fan Out Kit For Fiber Optic Cable	289.39	
	27 13 23 13-0014	EA	12-Fiber, Outdoor Buffer Tube Fan Out Kit For Fiber Optic Cable	316.92	
	27 13 23 13-0015		Spider Fan Out Kits For Fiber Optic Cable *(27 13 23 13-0009)*		
			Note: For tight buffered or loose tube non-armored cables. Includes aramid yarn strength member, outer protective PVDF jacket and one meter fan out lengths.		
	27 13 23 13-0016	EA	6-Fiber, Spider Fan Out Kit For Fiber Optic Cable	301.88	
	27 13 23 13-0017	EA	12-Fiber, Spider Fan Out Kit For Fiber Optic Cable	331.04	
	27 13 23 13-0018	EA	18-Fiber, Spider Fan Out Kit For Fiber Optic Cable	481.97	
	27 13 23 13-0019	EA	24-Fiber, Spider Fan Out Kit For Fiber Optic Cable	623.94	
	27 13 23 13-0020		Fiber Optic Cable Splice Closures *(27 13 23 13)*		
			Note: Includes mounting hardware. Excludes splicing and splice trays.		
	27 13 23 13-0021	EA	Up To 144-Fiber Capacity, Pedestal Fiber Optic Cable Splice Closure	1,005.77	112.80
	27 13 23 13-0022	EA	Up To 144-Fiber Capacity, Underground Fiber Optic Cable Splice Closure	1,231.37	225.60
	27 13 23 13-0023	EA	Up To 144-Fiber Capacity, Aerial Fiber Optic Cable Splice Closure	1,231.37	225.60
	27 13 23 13-0024	EA	Up To 288-Fiber Capacity, Pedestal Fiber Optic Cable Splice Closure	1,711.69	112.80
	27 13 23 13-0025	EA	Up To 288-Fiber Capacity, Underground Fiber Optic Cable Splice Closure	1,937.29	225.60
	27 13 23 13-0026	EA	Up To 288-Fiber Capacity, Aerial Fiber Optic Cable Splice Closure	1,937.29	225.60
	27 13 23 13-0027	EA	Splice Tray For Fiber Optic Cable Splice Closure	67.53	14.10
			Note: Up to 12-fiber, mechanical or fusion splice tray. Excludes splice.		
	27 13 23 13-0028		Fiber Optic Cable Splicing *(27 13 23 13)*		
	27 13 23 13-0029	EA	Single Strand, Fusion Splice Of Fiber Optic Cable	33.84	
	27 13 23 13-0030	EA	12-Strand Ribbon, Fusion Splice Of Fiber Optic Cable	112.80	
	27 13 23 13-0031		Fiber Optic Cable Testing *(27 13 23 13)*		
			Note: Price based on testing one wavelength.		
	27 13 23 13-0032		Fiber Optic Cable Testing Using An OTDR *(27 13 23 13-0031)*		
			Note: Testing using an optical time domain reflectometer.		
	27 13 23 13-0033	EA	Test 1-Strand Of Fiber Optic Cable Using A Single Directional OTDR Test	22.56	
			For >12 To 48 Strands, Deduct	*-1.69*	
			For >48 Strands, Deduct	*-2.26*	
	27 13 23 13-0034	EA	Test 1-Strand Of Fiber Optic Cable Using A Multi-Directional OTDR Test	33.84	
			For >12 To 48 Strands, Deduct	*-2.54*	
			For >48 Strands, Deduct	*-3.38*	
	27 13 23 13-0035	EA	Test 1-Strand Of Fiber Optic Cable Using A Single Directional OTDR Test With Documentation	56.40	
			For >12 To 48 Strands, Deduct	*-4.23*	
			For >48 Strands, Deduct	*-5.64*	
	27 13 23 13-0036	EA	Test 1-Strand Of Fiber Optic Cable Using A Multi-Directional OTDR Test With Documentation	84.60	
			For >12 To 48 Strands, Deduct	*-6.35*	
			For >48 Strands, Deduct	*-8.46*	
	27 13 23 13-0037		Fiber Optic Cable Testing Using A Power Meter *(27 13 23 13-0031)*		
	27 13 23 13-0038	EA	Test 1-Strand Of Fiber Optic Cable Using A Single Directional Power Meter Test	22.56	
			For >12 To 48 Strands, Deduct	*-1.69*	
			For >48 Strands, Deduct	*-2.26*	
	27 13 23 13-0039	EA	Test 1-Strand Of Fiber Optic Cable Using A Multi-Directional Power Meter Test	33.84	
			For >12 To 48 Strands, Deduct	*-2.54*	
			For >48 Strands, Deduct	*-3.38*	
	27 13 23 13-0040		Fiber Optic Cable Light Source/Continuity Testing *(27 13 23 13-0031)*		
	27 13 23 13-0041	EA	Test 1-Strand Of Fiber Optic Cable Using A Light Source/Continuity Test	22.56	
			For >12 To 48 Strands, Deduct	*-1.69*	
			For >48 Strands, Deduct	*-2.26*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 13 23 13-0042		Other Fiber Optic Cable Equipment *(27 13 23 13)*		
27 13 23 13-0043	EA	8 Port Ethernet Switch	1,023.46	221.93
27 13 23 13-0044	EA	18 dBi Gain, 5.25-5.85 GHZ Band, 18 Degree Beamwidth Note: Patch antenna with 1 meter 3' SMA-N cable	1,470.06	221.93
27 13 23 13-0045	EA	Outdoor Multi Band 5.3 Or 5.8 GHz Wireless Ethernet Bridge Note: 8 Volt DC input	37,755.20	221.93
27 13 23 13-0046	EA	UPS, 500 VA 300 Watt UPS For CCTV, Edco PA400-120U	368.28	27.79
27 13 23 13-0047	EA	Hardened Ethernet Switch	3,953.83	111.09
27 13 23 13-0048	EA	1,440 Watt, 120 Volt AC Solar Power Station	102,457.20	2,666.26
27 13 23 13-0049	EA	2,880 Watt, 120 Volt AC Solar Power Station	127,166.66	3,555.02
27 13 23 13-0050	EA	Fiber Break Out Box For 24 Fiber	1,602.56	222.18
27 13 23 13-0051	EA	Fiber Optic MM Data (PTZ or SYNC) 1300 Video 850, 1 Fiber, RM	1,889.97	111.09
27 13 23 13-0052	EA	Fiber Optic MM Data (PTZ or SYNC) 850 Video 850, 2 Fibers	1,577.25	111.09
27 13 23 13-0053	EA	Fiber Optic 19" Rack, 115 Volt AC Input	2,001.06	166.64
27 13 23 13-0054		Other Fiber Optic Cable Splicing *(27 13 23 13)*		
27 13 23 13-0055	EA	Fiber Optic Finger Splice	49.21	21.21
27 13 23 13-0056	EA	Fiber Optic Splice Box - Manholes	11,478.37	

27 15 Communications Horizontal Cabling *(27 10)*

27 15 01 Communications Horizontal Cabling Applications *(27 15)*

27 15 01 13 Video Surveillance Communications Conductors and Cables *(27 15 01)*

Note: Cable installed in conduit includes pull wires and installation in conduit, innerduct, wiremold, etc. Cable installed exposed includes installation on exposed surfaces, uncovered wireways, cable trays, etc. See CSI section 26 05 19 00-0000 for low-voltage electrical power cable, 26 05 23 00-0000 for control-voltage electrical power cable, 27 13 00 00-0000 for conductors and cables.

27 15 01 15 Access Control Communications Conductors and Cables *(27 15 01)*

Note: Cable installed in conduit includes pull wires and installation in conduit, innerduct, wiremold, etc. Cable installed exposed includes installation on exposed surfaces, uncovered wireways, cable trays, etc. See CSI section 26 05 19 00-0000 for low-voltage electrical power cable, 26 05 23 00-0000 for control-voltage electrical power cable, 27 13 00 00-0000 for conductors and cables.

27 15 01 16 Voice Communications Horizontal Cabling *(27 15 01)*

Note: Cable installed in conduit includes pull wires and installation in conduit, innerduct, wiremold, etc. Cable installed exposed includes installation on exposed surfaces, uncovered wireways, cable trays, etc. See CSI section 26 05 19 00-0000 for low-voltage electrical power cable, 26 05 23 00-0000 for control-voltage electrical power cable, 27 13 00 00-0000 for conductors and cables.

27 15 01 17 Intrusion Detection Communications Conductors and Cables *(27 15 01)*

Note: Cable installed in conduit includes pull wires and installation in conduit, innerduct, wiremold, etc. Cable installed exposed includes installation on exposed surfaces, uncovered wireways, cable trays, etc. See CSI section 26 05 19 00-0000 for low-voltage electrical power cable, 26 05 23 00-0000 for control-voltage electrical power cable, 27 13 00 00-0000 for conductors and cables, 27 15 01 19-0000 for Type FPLP Cable.

27 15 01 19 Fire Alarm Communications Conductors and Cables *(27 15 01)*

Note: Cable installed in conduit includes pull wires and installation in conduit, innerduct, wiremold, etc. Cable installed exposed includes installation on exposed surfaces, uncovered wireways, cable trays, etc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 01 19-0001		Fire Alarm/Life Safety Cable *(27 15 01 19)*		
27 15 01 19-0002		Twisted Pair, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable *(27 15 01 19-0001)*		
27 15 01 19-0003		Twisted Pair, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit *(27 15 01 19-0002)*		
27 15 01 19-0004	MLF	1-Pair, 18 AWG, Twisted Pair, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,872.43	767.50
27 15 01 19-0005	MLF	2-Pair, 18 AWG, Twisted Pair, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	2,312.06	795.24
27 15 01 19-0006	MLF	1-Pair, 16 AWG, Twisted Pair, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	2,135.35	872.40
27 15 01 19-0007	MLF	2-Pair, 16 AWG, Twisted Pair, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	2,837.28	903.53
27 15 01 19-0008	MLF	1-Pair, 14 AWG, Twisted Pair, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	2,455.48	976.62
27 15 01 19-0009	MLF	2-Pair, 14 AWG, Twisted Pair, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	3,456.06	1,011.82
27 15 01 19-0010	MLF	1-Pair, 12 AWG, Twisted Pair, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	3,157.10	1,116.73
27 15 01 19-0011	MLF	2-Pair, 12 AWG, Twisted Pair, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	4,712.96	1,156.54
27 15 01 19-0012		Twisted Pair, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed *(27 15 01 19-0002)*		
27 15 01 19-0013	MLF	1-Pair, 18 AWG, Twisted Pair, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	3,151.59	1,535.21
27 15 01 19-0014	MLF	2-Pair, 18 AWG, Twisted Pair, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	3,637.48	1,590.48

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 01 19-0015	MLF	1-Pair, 16 AWG, Twisted Pair, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	3,589.35	1,745.02
27 15 01 19-0016	MLF	2-Pair, 16 AWG, Twisted Pair, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	4,343.17	1,807.07
27 15 01 19-0017	MLF	1-Pair, 14 AWG, Twisted Pair, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	4,083.19	1,953.71
27 15 01 19-0018	MLF	2-Pair, 14 AWG, Twisted Pair, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	5,142.42	2,023.64
27 15 01 19-0019	MLF	1-Pair, 12 AWG, Twisted Pair, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	5,018.30	2,233.45
27 15 01 19-0020	MLF	2-Pair, 12 AWG, Twisted Pair, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	6,640.71	2,313.54

27 15 01 19-0021 Shielded, Non-Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit *(27 15 01 19-0001)*

27 15 01 19-0022	MLF	2 Conductors, #22 AWG, Shielded, Non-Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,175.84	628.07
27 15 01 19-0023	MLF	4 Conductors, #22 AWG, Shielded, Non-Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,274.04	650.41
27 15 01 19-0024	MLF	2 Conductors, #18 AWG, Shielded, Non-Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,430.18	767.50
27 15 01 19-0025	MLF	3 Conductors, #18 AWG, Shielded, Non-Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,528.51	781.37
27 15 01 19-0026	MLF	4 Conductors, #18 AWG, Shielded, Non-Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,587.72	795.24
27 15 01 19-0027	MLF	6 Conductors, #18 AWG, Shielded, Non-Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,780.19	822.99
27 15 01 19-0028	MLF	8 Conductors, #18 AWG, Shielded, Non-Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	2,057.41	850.74
27 15 01 19-0029	MLF	2 Conductors, #16 AWG, Shielded, Non-Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,670.55	872.40
27 15 01 19-0030	MLF	4 Conductors, #16 AWG, Shielded, Non-Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,885.41	903.53
27 15 01 19-0031	MLF	2 Conductors, #14 AWG, Shielded, Non-Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,938.05	976.62
27 15 01 19-0032	MLF	4 Conductors, #14 AWG, Shielded, Non-Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	2,274.86	1,011.82
27 15 01 19-0033	MLF	2 Conductors, #12 AWG, Shielded, Non-Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	2,371.72	1,116.73
27 15 01 19-0034	MLF	4 Conductors, #12 AWG, Shielded, Non-Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	2,916.34	1,156.54

27 15 01 19-0035 Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable *(27 15 01 19-0001)*

27 15 01 19-0036 Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit *(27 15 01 19-0035)*

27 15 01 19-0037	MLF	2/c #22 AWG, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,165.68	628.07
27 15 01 19-0038	MLF	2/c #18 AWG, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,423.58	767.50
27 15 01 19-0039	MLF	3/c #18 AWG, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,592.28	781.37
27 15 01 19-0040	MLF	4/c #18 AWG, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,605.38	795.24
27 15 01 19-0041	MLF	6/c #18 AWG, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,872.35	822.99
27 15 01 19-0042	MLF	2/c #16 AWG, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,660.58	872.40
27 15 01 19-0043	MLF	4/c #16 AWG, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,907.78	903.53
27 15 01 19-0044	MLF	2/c #14 AWG, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,893.18	976.62
27 15 01 19-0045	MLF	4/c #14 AWG, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	2,453.22	1,011.82
27 15 01 19-0046	MLF	2/c #12 AWG, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	2,357.05	1,116.73
27 15 01 19-0047	MLF	4/c #12 AWG, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	3,187.11	1,156.54

27 15 01 19-0048 Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed *(27 15 01 19-0035)*

27 15 01 19-0049	MLF	2/c #22 AWG, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	2,212.47	1,256.60
27 15 01 19-0050	MLF	2/c #18 AWG, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	2,702.74	1,535.21
27 15 01 19-0051	MLF	3/c #18 AWG, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	2,894.00	1,562.29
27 15 01 19-0052	MLF	4/c #18 AWG, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	2,930.80	1,590.48

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 01 19-0053	MLF	6 Conductors, #18 AWG, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	3,244.01	1,645.75
27 15 01 19-0054	MLF	2 Conductors, #16 AWG, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	3,114.58	1,745.02
27 15 01 19-0055	MLF	4/c #16 AWG, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	3,413.67	1,807.07
27 15 01 19-0056	MLF	2 Conductors, #14 AWG, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	3,520.89	1,953.71
27 15 01 19-0057	MLF	4 Conductors, #14 AWG, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	4,139.58	2,023.64
27 15 01 19-0058	MLF	2 Conductors, #12 AWG, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	4,218.25	2,233.45
27 15 01 19-0059	MLF	4 Conductors, #12 AWG, Non-Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	5,114.86	2,313.54
27 15 01 19-0060		Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable *(27 15 01 19-0001)*		
27 15 01 19-0061		Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit *(27 15 01 19-0060)*		
27 15 01 19-0062	MLF	2 Conductors, #22 AWG, Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,207.49	628.07
27 15 01 19-0063	MLF	2 Conductors, #18 AWG, Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,453.43	767.50
27 15 01 19-0064	MLF	3 Conductors, #18 AWG, Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,703.11	781.37
27 15 01 19-0065	MLF	4 Conductors, #18 AWG, Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,635.93	795.24
27 15 01 19-0066	MLF	6 Conductors, #18 AWG, Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,903.59	822.99
27 15 01 19-0067	MLF	2 Conductors, #16 AWG, Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,729.19	872.40
27 15 01 19-0068	MLF	4 Conductors, #16 AWG, Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,939.52	903.53
27 15 01 19-0069	MLF	2 Conductors, #14 AWG, Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	2,041.17	976.62
27 15 01 19-0070	MLF	4 Conductors, #14 AWG, Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	2,379.01	1,011.82
27 15 01 19-0071	MLF	2 Conductors, #12 AWG, Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	2,466.56	1,116.73
27 15 01 19-0072	MLF	4 Conductors, #12 AWG, Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	2,961.80	1,156.54
27 15 01 19-0073		Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed *(27 15 01 19-0060)*		
27 15 01 19-0074	MLF	2 Conductors, #22 AWG, Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	2,254.28	1,256.60
27 15 01 19-0075	MLF	2 Conductors, #18 AWG, Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	2,732.59	1,535.21
27 15 01 19-0076	MLF	3 Conductors, #18 AWG, Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	3,004.83	1,562.29
27 15 01 19-0077	MLF	4 Conductors, #18 AWG, Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	2,961.35	1,590.48
27 15 01 19-0078	MLF	6 Conductors, #18 AWG, Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	3,275.25	1,645.75
27 15 01 19-0079	MLF	2/c #16 AWG, Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	3,183.19	1,745.02
27 15 01 19-0080	MLF	4/c #16 AWG, Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	3,445.41	1,807.07
27 15 01 19-0081	MLF	2/c #14 AWG, Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	3,668.88	1,953.71
27 15 01 19-0082	MLF	4 Conductors, #14 AWG, Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	4,065.37	2,023.64
27 15 01 19-0083	MLF	2 Conductors, #12 AWG, Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	4,327.76	2,233.45
27 15 01 19-0084	MLF	4 Conductors, #12 AWG, Shielded, Plenum Rated, Solid Type FPLP (Red), Fire Alarm/Life Safety Cable, Installed Exposed	4,889.55	2,313.54
27 15 01 19-0085		Non-Shielded, Riser Rated, FPLR (Red), Fire Alarm/Life Safety Cable *(27 15 01 19-0001)*		
27 15 01 19-0086		Non-Shielded, Riser Rated, FPLR (Red), Fire Alarm/Life Safety Cable, Installed In Conduit *(27 15 01 19-0085)*		
27 15 01 19-0087	MLF	2 Conductors, #22 AWG, Non-Shielded, Riser Rated, Solid Type FPLR (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,171.72	628.07
27 15 01 19-0088	MLF	2 Conductors, #18 AWG, Non-Shielded, Riser Rated, Solid Type FPLR (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,476.74	767.50
27 15 01 19-0089	MLF	3 Conductors, #18 AWG, Non-Shielded, Riser Rated, Solid Type FPLR (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,597.64	781.37
27 15 01 19-0090	MLF	4 Conductors, #18 AWG, Non-Shielded, Riser Rated, Solid Type FPLR (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,699.15	795.24
27 15 01 19-0091	MLF	6 Conductors, #18 AWG, Non-Shielded, Riser Rated, Solid Type FPLR (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,921.57	822.99

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 01 19-0092	MLF	2 Conductors, #16 AWG, Non-Shielded, Riser Rated, Solid Type FPLR (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,704.57	872.40
27 15 01 19-0093	MLF	4 Conductors, #16 AWG, Non-Shielded, Riser Rated, Solid Type FPLR (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	2,009.13	903.53
27 15 01 19-0094	MLF	2 Conductors, #14 AWG, Non-Shielded, Riser Rated, Solid Type FPLR (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	1,999.53	976.62
27 15 01 19-0095	MLF	4 Conductors, #14 AWG, Non-Shielded, Riser Rated, Solid Type FPLR (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	2,548.45	1,011.82
27 15 01 19-0096	MLF	2 Conductors, #12 AWG, Non-Shielded, Riser Rated, Solid Type FPLR (Red), Fire Alarm/Life Safety Cable, Installed In Conduit	2,409.20	1,116.73

27 15 01 19-0097 Non-Shielded, Riser Rated, FPLR (Red), Fire Alarm/Life Safety Cable, Installed Exposed *(27 15 01 19-0085)*

27 15 01 19-0098	MLF	2 Conductors, #22 AWG, Non-Shielded, Riser Rated, Solid Type FPLR (Red), Fire Alarm/Life Safety Cable, Installed Exposed	2,218.51	1,256.60
27 15 01 19-0099	MLF	2 Conductors, #18 AWG, Non-Shielded, Riser Rated, Solid Type FPLR (Red), Fire Alarm/Life Safety Cable, Installed Exposed	2,755.90	1,535.21
27 15 01 19-0100	MLF	3 Conductors, #18 AWG, Non-Shielded, Riser Rated, Stranded Type FPLR (Red), Fire Alarm/Life Safety Cable, Installed Exposed	2,899.36	1,562.29
27 15 01 19-0101	MLF	4 Conductors, #18 AWG, Non-Shielded, Riser Rated, Stranded Type FPLR (Red), Fire Alarm/Life Safety Cable, Installed Exposed	3,024.57	1,590.48
27 15 01 19-0102	MLF	6 Conductors, #18 AWG, Non-Shielded, Riser Rated, Stranded Type FPLR (Red), Fire Alarm/Life Safety Cable, Installed Exposed	3,293.23	1,645.75
27 15 01 19-0103	MLF	2 Conductors, #16 AWG, Non-Shielded, Riser Rated, Stranded Type FPLR (Red), Fire Alarm/Life Safety Cable, Installed Exposed	3,158.57	1,745.02
27 15 01 19-0104	MLF	4 Conductors, #16 AWG, Non-Shielded, Riser Rated, Stranded Type FPLR (Red), Fire Alarm/Life Safety Cable, Installed Exposed	3,515.02	1,807.07
27 15 01 19-0105	MLF	2 Conductors, #14 AWG, Non-Shielded, Riser Rated, Stranded Type FPLR (Red), Fire Alarm/Life Safety Cable, Installed Exposed	3,627.24	1,953.71
27 15 01 19-0106	MLF	4 Conductors, #14 AWG, Non-Shielded, Riser Rated, Stranded Type FPLR (Red), Fire Alarm/Life Safety Cable, Installed Exposed	4,234.81	2,023.64
27 15 01 19-0107	MLF	2 Conductors, #12 AWG, Non-Shielded, Riser Rated, Stranded Type FPLR (Red), Fire Alarm/Life Safety Cable, Installed Exposed	4,270.40	2,233.45

27 15 13 Communications Copper Horizontal Cabling *(27 15)*

Note: Cable installed in conduit includes pull wires and installation in conduit, innerduct, wiremold, etc. Cable installed exposed includes installation on exposed surfaces, uncovered wireways, cable trays, etc.

27 15 13 00-0001 Copper Telecommunications Cable *(27 15 13)*

27 15 13 00-0002 Indoor Telecommunications Cable *(27 15 13 00-0001)*

Note: Shielded twisted pair cables (STP) includes a metallic foil wrap. Un-shielded twisted pair cables (UTP) excludes any shielding.

27 15 13 00-0003 Category 3, Indoor Telecommunications Cable *(27 15 13 00-0002)*

Note: Un-shielded twisted pair cables (UTP).

27 15 13 00-0004 Category 3, Indoor Telecommunications Riser Cable *(27 15 13 00-0003)*

27 15 13 00-0005 24 AWG, Category 3, Indoor Telecommunications Riser Cable *(27 15 13 00-0004)*

27 15 13 00-0006 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed In Conduit *(27 15 13 00-0005)*

27 15 13 00-0007	MLF	2-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed In Conduit	903.24	473.77
27 15 13 00-0008	MLF	3-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed In Conduit	951.74	473.77
27 15 13 00-0009	MLF	4-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed In Conduit	968.88	473.77
27 15 13 00-0010	MLF	6-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed In Conduit	1,178.17	541.44
27 15 13 00-0011	MLF	12-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed In Conduit	1,535.16	541.44
27 15 13 00-0012	MLF	25-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed In Conduit	2,101.99	541.44
27 15 13 00-0013	MLF	50-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed In Conduit	3,399.29	676.80
27 15 13 00-0014	MLF	100-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed In Conduit	6,183.96	1,082.89
27 15 13 00-0015	MLF	150-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed In Conduit	8,437.00	1,218.25
27 15 13 00-0016	MLF	200-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed In Conduit	11,277.95	1,353.61
27 15 13 00-0017	MLF	300-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed In Conduit	16,517.32	1,895.05
27 15 13 00-0018	MLF	400-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed In Conduit	21,685.77	2,341.74
27 15 13 00-0019	MLF	600-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed In Conduit	34,482.13	3,248.66
27 15 13 00-0020	MLF	900-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed In Conduit	55,694.16	6,497.31
27 15 13 00-0021	MLF	1,200-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed In Conduit	75,484.38	9,745.96

27 15 13 00-0022 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed Exposed *(27 15 13 00-0005)*

27 15 13 00-0023	MLF	2-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed Exposed	1,692.84	947.52
		For Work In Restricted Working Space, Add	*473.76*	
27 15 13 00-0024	MLF	3-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed Exposed	1,741.34	947.52
		For Work In Restricted Working Space, Add	*473.76*	
27 15 13 00-0025	MLF	4-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed Exposed	1,758.48	947.52
		For Work In Restricted Working Space, Add	*473.76*	
27 15 13 00-0026	MLF	6-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed Exposed	1,854.97	947.52
		For Work In Restricted Working Space, Add	*473.76*	
27 15 13 00-0027	MLF	12-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed Exposed	2,211.96	947.52
		For Work In Restricted Working Space, Add	*473.76*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 13 00-0028	MLF	25-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed Exposed	3,004.39	1,082.89
		For Work In Restricted Working Space, Add	*541.44*	
27 15 13 00-0029	MLF	50-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed Exposed	4,527.30	1,353.61
		For Work In Restricted Working Space, Add	*676.80*	
27 15 13 00-0030	MLF	100-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed Exposed	7,086.36	1,624.32
		For Work In Restricted Working Space, Add	*812.16*	
27 15 13 00-0031	MLF	150-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed Exposed	9,452.20	1,827.37
		For Work In Restricted Working Space, Add	*913.68*	
27 15 13 00-0032	MLF	200-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed Exposed	12,405.96	2,030.41
		For Work In Restricted Working Space, Add	*1,015.21*	
27 15 13 00-0033	MLF	300-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed Exposed	18,096.53	2,842.57
		For Work In Restricted Working Space, Add	*1,421.29*	
27 15 13 00-0034	MLF	400-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed Exposed	23,648.50	3,519.37
		For Work In Restricted Working Space, Add	*1,759.69*	
27 15 13 00-0035	MLF	600-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed Exposed	37,189.34	4,872.98
		For Work In Restricted Working Space, Add	*2,436.49*	
27 15 13 00-0036	MLF	900-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed Exposed	61,108.59	9,745.96
		For Work In Restricted Working Space, Add	*4,872.98*	
27 15 13 00-0037	MLF	1,200-Pair 24 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed Exposed	83,606.02	14,618.95
		For Work In Restricted Working Space, Add	*7,309.48*	

27 15 13 00-0038 22 AWG, Category 3, Indoor Telecommunications Riser Cable *(27 15 13 00-0004)*

27 15 13 00-0039 22 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed In Conduit *(27 15 13 00-0038)*

27 15 13 00-0040	MLF	25-Pair 22 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed In Conduit	3,513.83	541.44
27 15 13 00-0041	MLF	50-Pair 22 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed In Conduit	5,273.29	676.80
27 15 13 00-0042	MLF	100-Pair 22 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed In Conduit	9,677.28	1,082.89
27 15 13 00-0043	MLF	200-Pair 22 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed In Conduit	17,362.63	1,353.61
27 15 13 00-0044	MLF	300-Pair 22 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed In Conduit	25,566.15	1,895.05
27 15 13 00-0045	MLF	400-Pair 22 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed In Conduit	33,340.46	2,341.74
27 15 13 00-0046	MLF	600-Pair 22 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed In Conduit	49,500.93	3,248.66

27 15 13 00-0047 22 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed Exposed *(27 15 13 00-0038)*

27 15 13 00-0048	MLF	25-Pair 22 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed Exposed	4,416.23	1,082.89
		For Work In Restricted Working Space, Add	*541.44*	
27 15 13 00-0049	MLF	50-Pair 22 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed Exposed	6,401.30	1,353.61
		For Work In Restricted Working Space, Add	*676.80*	
27 15 13 00-0050	MLF	100-Pair 22 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed Exposed	10,579.68	1,624.32
		For Work In Restricted Working Space, Add	*812.16*	
27 15 13 00-0051	MLF	200-Pair 22 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed Exposed	18,490.64	2,030.41
		For Work In Restricted Working Space, Add	*1,015.21*	
27 15 13 00-0052	MLF	300-Pair 22 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed Exposed	27,145.36	2,842.57
		For Work In Restricted Working Space, Add	*1,421.29*	
27 15 13 00-0053	MLF	400-Pair 22 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed Exposed	35,303.19	3,519.37
		For Work In Restricted Working Space, Add	*1,759.69*	
27 15 13 00-0054	MLF	600-Pair 22 AWG, Category 3, Indoor Telecommunications Riser Cable, Installed Exposed	52,208.14	4,872.98
		For Work In Restricted Working Space, Add	*2,436.49*	

27 15 13 00-0055 Category 3, Indoor Telecommunications Plenum Cable *(27 15 13 00-0003)*

27 15 13 00-0056 24 AWG, Category 3, Indoor Telecommunications Plenum Cable *(27 15 13 00-0055)*

27 15 13 00-0057 24 AWG, Category 3, Indoor Telecommunications Plenum Cable, Installed In Conduit *(27 15 13 00-0056)*

27 15 13 00-0058	MLF	2-Pair 24 AWG, Category 3, Indoor Telecommunications Plenum Cable, Installed In Conduit	942.46	473.77
27 15 13 00-0059	MLF	3-Pair 24 AWG, Category 3, Indoor Telecommunications Plenum Cable, Installed In Conduit	990.76	473.77
27 15 13 00-0060	MLF	4-Pair 24 AWG, Category 3, Indoor Telecommunications Plenum Cable, Installed In Conduit	1,026.89	473.77
27 15 13 00-0061	MLF	6-Pair 24 AWG, Category 3, Indoor Telecommunications Plenum Cable, Installed In Conduit	1,243.31	541.44
27 15 13 00-0062	MLF	12-Pair 24 AWG, Category 3, Indoor Telecommunications Plenum Cable, Installed In Conduit	1,632.45	541.44
27 15 13 00-0063	MLF	25-Pair 24 AWG, Category 3, Indoor Telecommunications Plenum Cable, Installed In Conduit	2,687.28	541.44
27 15 13 00-0064	MLF	50-Pair 24 AWG, Category 3, Indoor Telecommunications Plenum Cable, Installed In Conduit	4,590.89	676.80
27 15 13 00-0065	MLF	100-Pair 24 AWG, Category 3, Indoor Telecommunications Plenum Cable, Installed In Conduit	8,680.67	1,082.89
27 15 13 00-0066	MLF	200-Pair 24 AWG, Category 3, Indoor Telecommunications Plenum Cable, Installed In Conduit	15,190.45	1,353.61
27 15 13 00-0067	MLF	300-Pair 24 AWG, Category 3, Indoor Telecommunications Plenum Cable, Installed In Conduit	22,805.28	1,895.05

27 15 13 00-0068 24 AWG, Category 3, Indoor Telecommunications Plenum Cable, Installed Exposed *(27 15 13 00-0056)*

27 15 13 00-0069	MLF	2-Pair 24 AWG, Category 3, Indoor Telecommunications Plenum Cable, Installed Exposed	1,732.06	947.52
		For Work In Restricted Working Space, Add	*473.76*	
27 15 13 00-0070	MLF	3-Pair 24 AWG, Category 3, Indoor Telecommunications Plenum Cable, Installed Exposed	1,780.36	947.52
		For Work In Restricted Working Space, Add	*473.76*	
27 15 13 00-0071	MLF	4-Pair 24 AWG, Category 3, Indoor Telecommunications Plenum Cable, Installed Exposed	1,816.49	947.52
		For Work In Restricted Working Space, Add	*473.76*	
27 15 13 00-0072	MLF	6-Pair 24 AWG, Category 3, Indoor Telecommunications Plenum Cable, Installed Exposed	1,920.11	947.52
		For Work In Restricted Working Space, Add	*473.76*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 13 00-0073	MLF	12-Pair 24 AWG, Category 3, Indoor Telecommunications Plenum Cable, Installed Exposed	2,309.25	947.52
		For Work In Restricted Working Space, Add	*473.76*	
27 15 13 00-0074	MLF	25-Pair 24 AWG, Category 3, Indoor Telecommunications Plenum Cable, Installed Exposed	3,589.68	1,082.89
		For Work In Restricted Working Space, Add	*541.44*	
27 15 13 00-0075	MLF	50-Pair 24 AWG, Category 3, Indoor Telecommunications Plenum Cable, Installed Exposed	5,718.90	1,353.61
		For Work In Restricted Working Space, Add	*676.80*	
27 15 13 00-0076	MLF	100-Pair 24 AWG, Category 3, Indoor Telecommunications Plenum Cable, Installed Exposed	9,583.07	1,624.32
		For Work In Restricted Working Space, Add	*812.16*	
27 15 13 00-0077	MLF	200-Pair 24 AWG, Category 3, Indoor Telecommunications Plenum Cable, Installed Exposed	16,318.46	2,030.41
		For Work In Restricted Working Space, Add	*1,015.21*	
27 15 13 00-0078	MLF	300-Pair 24 AWG, Category 3, Indoor Telecommunications Plenum Cable, Installed Exposed	24,384.49	2,842.57
		For Work In Restricted Working Space, Add	*1,421.29*	

27 15 13 00-0079 Category 5E, Indoor Telecommunications Cable *(27 15 13 00-0002)*

27 15 13 00-0080 Category 5E, Indoor Telecommunications Riser Cable *(27 15 13 00-0079)*

27 15 13 00-0081 Category 5E, Indoor Telecommunications Riser Cable, Installed In Conduit *(27 15 13 00-0080)*

27 15 13 00-0082	MLF	4-Pair Solid UTP, 24 AWG, Category 5E, Indoor Telecommunications Riser Cable, Installed In Conduit	976.60	473.77
27 15 13 00-0083	MLF	4-Pair Stranded UTP, 24 AWG, Category 5E, Indoor Telecommunications Riser Cable, Installed In Conduit	1,020.40	473.77
27 15 13 00-0084	MLF	4-Pair Solid STP, 24 AWG, Category 5E, Indoor Telecommunications Riser Cable, Installed In Conduit	1,134.04	541.44
27 15 13 00-0085	MLF	4-Pair Stranded STP, 24 AWG, Category 5E, Indoor Telecommunications Riser Cable, Installed In Conduit	1,177.82	541.44

27 15 13 00-0086 Category 5E, Indoor Telecommunications Riser Cable, Installed Exposed *(27 15 13 00-0080)*

27 15 13 00-0087	MLF	4-Pair Solid UTP, 24 AWG, Category 5E, Indoor Telecommunications Riser Cable, Installed Exposed	1,766.20	947.52
		For Work In Restricted Working Space, Add	*473.76*	
27 15 13 00-0088	MLF	4-Pair Stranded UTP, 24 AWG, Category 5E, Indoor Telecommunications Riser Cable, Installed Exposed	1,810.00	947.52
		For Work In Restricted Working Space, Add	*473.76*	
27 15 13 00-0089	MLF	4-Pair Solid STP, 24 AWG, Category 5E, Indoor Telecommunications Riser Cable, Installed Exposed	2,036.44	1,082.89
		For Work In Restricted Working Space, Add	*541.44*	
27 15 13 00-0090	MLF	4-Pair Stranded STP, 24 AWG, Category 5E, Indoor Telecommunications Riser Cable, Installed Exposed	2,080.22	1,082.89
		For Work In Restricted Working Space, Add	*541.44*	

27 15 13 00-0091 Category 5E, Indoor Telecommunications Plenum Cable *(27 15 13 00-0079)*

27 15 13 00-0092 Category 5E, Indoor Telecommunications Plenum Cable, Installed In Conduit *(27 15 13 00-0091)*

27 15 13 00-0093	MLF	4-Pair Solid UTP, 24 AWG, Category 5E, Indoor Telecommunications Plenum Cable, Installed In Conduit	1,137.66	473.77
27 15 13 00-0094	MLF	4-Pair Solid STP, 24 AWG, Category 5E, Indoor Telecommunications Plenum Cable, Installed In Conduit	1,592.69	541.44

27 15 13 00-0095 Category 5E, Indoor Telecommunications Plenum Cable, Installed Exposed *(27 15 13 00-0091)*

27 15 13 00-0096	MLF	4-Pair Solid UTP, 24 AWG, Category 5E, Indoor Telecommunications Plenum Cable, Installed Exposed	1,927.26	947.52
		For Work In Restricted Working Space, Add	*473.76*	
27 15 13 00-0097	MLF	4-Pair Solid STP, 24 AWG, Category 5E, Indoor Telecommunications Plenum Cable, Installed Exposed	2,495.09	1,082.89
		For Work In Restricted Working Space, Add	*541.44*	

27 15 13 00-0098 Category 6, Indoor Telecommunications Cable *(27 15 13 00-0002)*

27 15 13 00-0099 Category 6, Indoor Telecommunications Riser Cable *(27 15 13 00-0098)*

27 15 13 00-0100 Category 6, Indoor Telecommunications Riser Cable, Installed In Conduit *(27 15 13 00-0099)*

27 15 13 00-0101	MLF	4-Pair Solid UTP, 23 AWG, Category 6, Indoor Telecommunications Riser Cable, Installed In Conduit	1,123.80	473.77
27 15 13 00-0102	MLF	4-Pair Stranded UTP, 23 AWG, Category 6, Indoor Telecommunications Riser Cable, Installed In Conduit	1,161.17	473.77

27 15 13 00-0103 Category 6, Indoor Telecommunications Riser Cable, Installed Exposed *(27 15 13 00-0099)*

27 15 13 00-0104	MLF	4-Pair Solid UTP, 23 AWG, Category 6, Indoor Telecommunications Riser Cable, Installed Exposed	1,913.40	947.52
		For Work In Restricted Working Space, Add	*473.76*	
27 15 13 00-0105	MLF	4-Pair Stranded UTP, 23 AWG, Category 6, Indoor Telecommunications Riser Cable, Installed Exposed	1,950.77	947.52
		For Work In Restricted Working Space, Add	*473.76*	

27 15 13 00-0106 Category 6, Indoor Telecommunications Plenum Cable *(27 15 13 00-0098)*

27 15 13 00-0107 Category 6, Indoor Telecommunications Plenum Cable, Installed In Conduit *(27 15 13 00-0106)*

27 15 13 00-0108	MLF	4-Pair Solid UTP, 23 AWG, Category 6, Indoor Telecommunications Plenum Cable, Installed In Conduit	1,413.83	473.77

27 15 13 00-0109 Category 6, Indoor Telecommunications Plenum Cable, Installed Exposed *(27 15 13 00-0106)*

27 15 13 00-0110	MLF	4-Pair Solid UTP, 23 AWG, Category 6, Indoor Telecommunications Plenum Cable, Installed Exposed	2,203.43	947.52
		For Work In Restricted Working Space, Add	*473.76*	

27 15 13 00-0111 Category 6A, Indoor Telecommunications Cable *(27 15 13 00-0002)*

copyright 2026 The Gordian Group, Inc.

CSI		UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 13 00-0112			Category 6a, Indoor Telecommunications Riser Cable *(27 15 13 00-0111)*		
27 15 13 00-0113			Category 6a Indoor Telecommunications Riser Cable, Installed In Conduit *(27 15 13 00-0112)*		
27 15 13 00-0114		MLF	4-Pair Solid UTP, 23 AWG, Category 6A, Indoor Telecommunications Riser Cable, Installed In Conduit	1,183.51	473.77
27 15 13 00-0115			Category 6a, Indoor Telecommunications Riser Cable, Installed Exposed *(27 15 13 00-0112)*		
27 15 13 00-0116		MLF	4-Pair Solid UTP, 23 AWG, Category 6A, Indoor Telecommunications Riser Cable, Installed Exposed	1,973.11	947.52
			For Work In Restricted Working Space, Add	*473.76*	
27 15 13 00-0117			Category 6A, Indoor Telecommunications Plenum Cable *(27 15 13 00-0111)*		
27 15 13 00-0118			Category 6A, Indoor Telecommunications Plenum Cable, Installed In Conduit *(27 15 13 00-0117)*		
27 15 13 00-0119		MLF	4-Pair Solid UTP, 23 AWG, Category 6A, Indoor Telecommunications Plenum Cable, Installed In Conduit	1,576.07	473.77
27 15 13 00-0120			Category 6a, Indoor Telecommunications Plenum Cable, Installed Exposed *(27 15 13 00-0117)*		
27 15 13 00-0121		MLF	4-Pair Solid UTP, 23 AWG, Category 6A, Indoor Telecommunications Plenum Cable, Installed Exposed	2,365.67	947.52
			For Work In Restricted Working Space, Add	*473.76*	
27 15 13 00-0122			Category 7, Indoor Telecommunications Cable *(27 15 13 00-0002)*		
27 15 13 00-0123			Category 7, Indoor Telecommunications Cable, Installed In Conduit *(27 15 13 00-0122)*		
27 15 13 00-0124		MLF	4-Pair Solid STP, 22 AWG, Category 7, Indoor Telecommunications Riser Cable, Installed In Conduit	2,420.90	541.44
27 15 13 00-0125		MLF	4-Pair Solid STP, 22 AWG, Category 7, Indoor Telecommunications Plenum Cable, Installed In Conduit	4,305.49	541.44
27 15 13 00-0126			Category 7, Indoor Telecommunications Cable, Installed Exposed *(27 15 13 00-0122)*		
27 15 13 00-0127		MLF	4-Pair Solid STP, 22 AWG, Category 7, Indoor Telecommunications Riser Cable, Installed Exposed	3,323.30	1,082.89
			For Work In Restricted Working Space, Add	*541.44*	
27 15 13 00-0128		MLF	4-Pair Solid STP, 22 AWG, Category 7, Indoor Telecommunications Plenum Cable, Installed Exposed	5,207.89	1,082.89
			For Work In Restricted Working Space, Add	*541.44*	
27 15 13 00-0129			Outdoor Telecommunications Cable *(27 15 13 00-0001)* Note: Cable buried in trench excludes excavation.		
27 15 13 00-0130			PE-89 Outdoor Telecommunications Cable *(27 15 13 00-0129)* Note: Includes foam-skin polyolefin insulated conductors.		
27 15 13 00-0131			24 AWG, PE-89 Outdoor Telecommunications Cable *(27 15 13 00-0130)*		
27 15 13 00-0132			24 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit *(27 15 13 00-0131)*		
27 15 13 00-0133		MLF	6-Pair 24 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit	1,914.39	541.44
27 15 13 00-0134		MLF	12-Pair 24 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit	2,342.43	947.52
27 15 13 00-0135		MLF	25-Pair 24 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit	3,377.29	609.12
27 15 13 00-0136		MLF	50-Pair 24 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit	5,246.70	676.80
27 15 13 00-0137		MLF	75-Pair 24 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit	7,443.87	947.52
27 15 13 00-0138		MLF	100-Pair 24 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit	9,419.49	1,082.89
27 15 13 00-0139		MLF	200-Pair 24 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit	16,479.77	1,218.25
27 15 13 00-0140		MLF	300-Pair 24 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit	24,240.72	1,759.69
27 15 13 00-0141		MLF	400-Pair 24 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit	32,134.67	2,301.13
27 15 13 00-0142		MLF	600-Pair 24 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit	43,647.71	3,113.30
27 15 13 00-0143		MLF	900-Pair 24 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit	68,305.61	6,226.59
27 15 13 00-0144		MLF	1,200-Pair 24 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit	93,030.57	9,204.52
27 15 13 00-0145			24 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench *(27 15 13 00-0131)*		
27 15 13 00-0146		MLF	6-Pair 24 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench	1,745.18	
27 15 13 00-0147		MLF	12-Pair 24 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench	2,173.22	
27 15 13 00-0148		MLF	25-Pair 24 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench	3,151.70	
27 15 13 00-0149		MLF	50-Pair 24 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench	5,021.11	
27 15 13 00-0150		MLF	75-Pair 24 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench	7,105.46	
27 15 13 00-0151		MLF	100-Pair 24 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench	8,855.48	
27 15 13 00-0152		MLF	200-Pair 24 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench	16,254.17	
27 15 13 00-0153		MLF	300-Pair 24 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench	23,563.91	
27 15 13 00-0154		MLF	400-Pair 24 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench	30,724.67	
27 15 13 00-0155		MLF	600-Pair 24 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench	41,166.10	
27 15 13 00-0156		MLF	900-Pair 24 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench	61,537.58	
27 15 13 00-0157		MLF	1,200-Pair 24 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench	83,104.13	
27 15 13 00-0158			22 AWG, PE-89 Outdoor Telecommunications Cable *(27 15 13 00-0130)*		
27 15 13 00-0159			22 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit *(27 15 13 00-0158)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 13 00-0160	MLF	6-Pair 22 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit	2,186.51	541.44
27 15 13 00-0161	MLF	12-Pair 22 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit	2,850.82	541.44
27 15 13 00-0162	MLF	25-Pair 22 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit	4,417.94	609.12
27 15 13 00-0163	MLF	50-Pair 22 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit	7,098.93	676.80
27 15 13 00-0164	MLF	75-Pair 22 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit	10,338.39	947.52
27 15 13 00-0165	MLF	100-Pair 22 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit	13,354.53	1,082.89
27 15 13 00-0166	MLF	200-Pair 22 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit	24,071.01	1,218.25
27 15 13 00-0167	MLF	300-Pair 22 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit	35,067.35	1,759.69
27 15 13 00-0168	MLF	400-Pair 22 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit	46,729.90	2,301.13
27 15 13 00-0169	MLF	600-Pair 22 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit	69,135.57	3,113.30
27 15 13 00-0170	MLF	900-Pair 22 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit	100,494.67	6,226.59
27 15 13 00-0171	MLF	1,200-Pair 22 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit	141,188.37	9,204.52
27 15 13 00-0172		22 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench *(27 15 13 00-0158)*		
27 15 13 00-0173	MLF	6-Pair 22 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench	2,017.30	
27 15 13 00-0174	MLF	12-Pair 22 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench	2,681.61	
27 15 13 00-0175	MLF	25-Pair 22 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench	4,192.35	
27 15 13 00-0176	MLF	50-Pair 22 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench	6,873.34	
27 15 13 00-0177	MLF	75-Pair 22 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench	9,999.98	
27 15 13 00-0178	MLF	100-Pair 22 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench	13,016.13	
27 15 13 00-0179	MLF	200-Pair 22 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench	23,845.41	
27 15 13 00-0180	MLF	300-Pair 22 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench	34,390.54	
27 15 13 00-0181	MLF	400-Pair 22 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench	45,319.90	
27 15 13 00-0182	MLF	600-Pair 22 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench	66,653.96	
27 15 13 00-0183	MLF	900-Pair 22 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench	93,726.64	
27 15 13 00-0184	MLF	1,200-Pair 22 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench	131,261.93	
27 15 13 00-0185		19 AWG, PE-89 Outdoor Telecommunications Cable *(27 15 13 00-0130)*		
27 15 13 00-0186		19 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit *(27 15 13 00-0185)*		
27 15 13 00-0187	MLF	25-Pair 19 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit	7,626.04	609.12
27 15 13 00-0188	MLF	50-Pair 19 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit	13,369.73	676.80
27 15 13 00-0189	MLF	75-Pair 19 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit	21,492.99	947.52
27 15 13 00-0190	MLF	100-Pair 19 AWG, PE-89 Outdoor Telecommunications Cable, Installed In Conduit	25,775.17	1,082.89
27 15 13 00-0191		19 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench *(27 15 13 00-0185)*		
27 15 13 00-0192	MLF	25-Pair 19 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench	7,400.45	
27 15 13 00-0193	MLF	50-Pair 19 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench	13,144.14	
27 15 13 00-0194	MLF	75-Pair 19 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench	21,154.58	
27 15 13 00-0195	MLF	100-Pair 19 AWG, PE-89 Outdoor Telecommunications Cable, Buried In Trench	25,436.77	
27 15 13 00-0196		PE-39 Outdoor Telecommunications Cable *(27 15 13 00-0129)* Note: Includes solid polyolefin insulated conductors.		
27 15 13 00-0197		24 AWG, PE-39 Outdoor Telecommunications Cable *(27 15 13 00-0196)*		
27 15 13 00-0198		24 AWG, PE-39 Outdoor Telecommunications Cable, Installed In Conduit *(27 15 13 00-0197)*		
27 15 13 00-0199	MLF	6-Pair 24 AWG, PE-39 Outdoor Telecommunications Cable, Installed In Conduit	2,629.45	947.52
27 15 13 00-0200	MLF	12-Pair 24 AWG, PE-39 Outdoor Telecommunications Cable, Installed In Conduit	3,153.11	947.52
27 15 13 00-0201	MLF	25-Pair 24 AWG, PE-39 Outdoor Telecommunications Cable, Installed In Conduit	4,209.57	947.52
27 15 13 00-0202	MLF	50-Pair 24 AWG, PE-39 Outdoor Telecommunications Cable, Installed In Conduit	6,112.05	947.52
27 15 13 00-0203	MLF	100-Pair 24 AWG, PE-39 Outdoor Telecommunications Cable, Installed In Conduit	9,970.56	947.52
27 15 13 00-0204	MLF	200-Pair 24 AWG, PE-39 Outdoor Telecommunications Cable, Installed In Conduit	18,255.99	1,218.25
27 15 13 00-0205	MLF	300-Pair 24 AWG, PE-39 Outdoor Telecommunications Cable, Installed In Conduit	26,663.56	1,759.69
27 15 13 00-0206	MLF	400-Pair 24 AWG, PE-39 Outdoor Telecommunications Cable, Installed In Conduit	35,086.88	2,301.13
27 15 13 00-0207	MLF	600-Pair 24 AWG, PE-39 Outdoor Telecommunications Cable, Installed In Conduit	47,958.17	3,113.30
27 15 13 00-0208	MLF	900-Pair 24 AWG, PE-39 Outdoor Telecommunications Cable, Installed In Conduit	73,880.09	6,226.59
27 15 13 00-0209	MLF	1,200-Pair 24 AWG, PE-39 Outdoor Telecommunications Cable, Installed In Conduit	107,488.53	9,204.52
27 15 13 00-0210		24 AWG, PE-39 Outdoor Telecommunications Cable, Buried In Trench *(27 15 13 00-0197)*		
27 15 13 00-0211	MLF	6-Pair 24 AWG, PE-39 Outdoor Telecommunications Cable, Buried In Trench	2,291.04	
27 15 13 00-0212	MLF	12-Pair 24 AWG, PE-39 Outdoor Telecommunications Cable, Buried In Trench	2,814.70	
27 15 13 00-0213	MLF	25-Pair 24 AWG, PE-39 Outdoor Telecommunications Cable, Buried In Trench	3,871.16	
27 15 13 00-0214	MLF	50-Pair 24 AWG, PE-39 Outdoor Telecommunications Cable, Buried In Trench	5,773.64	
27 15 13 00-0215	MLF	100-Pair 24 AWG, PE-39 Outdoor Telecommunications Cable, Buried In Trench	9,632.15	
27 15 13 00-0216	MLF	200-Pair 24 AWG, PE-39 Outdoor Telecommunications Cable, Buried In Trench	18,030.39	
27 15 13 00-0217	MLF	300-Pair 24 AWG, PE-39 Outdoor Telecommunications Cable, Buried In Trench	25,986.75	
27 15 13 00-0218	MLF	400-Pair 24 AWG, PE-39 Outdoor Telecommunications Cable, Buried In Trench	33,676.88	
27 15 13 00-0219	MLF	600-Pair 24 AWG, PE-39 Outdoor Telecommunications Cable, Buried In Trench	45,476.56	
27 15 13 00-0220	MLF	900-Pair 24 AWG, PE-39 Outdoor Telecommunications Cable, Buried In Trench	67,112.06	
27 15 13 00-0221	MLF	1,200-Pair 24 AWG, PE-39 Outdoor Telecommunications Cable, Buried In Trench	97,562.09	
27 15 13 00-0222		22 AWG, PE-39 Outdoor Telecommunications Cable *(27 15 13 00-0196)*		

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 13 00-0223		22 AWG, PE-39 Outdoor Telecommunications Cable, Installed In Conduit *(27 15 13 00-0222)*		
27 15 13 00-0224	MLF	6-Pair 22 AWG, PE-39 Outdoor Telecommunications Cable, Installed In Conduit	2,932.20	947.52
27 15 13 00-0225	MLF	12-Pair 22 AWG, PE-39 Outdoor Telecommunications Cable, Installed In Conduit	3,701.69	947.52
27 15 13 00-0226	MLF	25-Pair 22 AWG, PE-39 Outdoor Telecommunications Cable, Installed In Conduit	5,339.22	947.52
27 15 13 00-0227	MLF	50-Pair 22 AWG, PE-39 Outdoor Telecommunications Cable, Installed In Conduit	8,351.68	947.52
27 15 13 00-0228	MLF	100-Pair 22 AWG, PE-39 Outdoor Telecommunications Cable, Installed In Conduit	14,638.29	947.52
27 15 13 00-0229	MLF	200-Pair 22 AWG, PE-39 Outdoor Telecommunications Cable, Installed In Conduit	27,238.93	1,218.25
27 15 13 00-0230	MLF	300-Pair 22 AWG, PE-39 Outdoor Telecommunications Cable, Installed In Conduit	39,923.49	1,759.69
27 15 13 00-0231	MLF	400-Pair 22 AWG, PE-39 Outdoor Telecommunications Cable, Installed In Conduit	51,124.51	2,301.13
27 15 13 00-0232	MLF	600-Pair 22 AWG, PE-39 Outdoor Telecommunications Cable, Installed In Conduit	71,456.98	3,113.30
27 15 13 00-0233	MLF	900-Pair 22 AWG, PE-39 Outdoor Telecommunications Cable, Installed In Conduit	111,930.11	6,226.59
27 15 13 00-0234		22 AWG, PE-39 Outdoor Telecommunications Cable, Buried In Trench *(27 15 13 00-0222)*		
27 15 13 00-0235	MLF	6-Pair 22 AWG, PE-39 Outdoor Telecommunications Cable, Buried In Trench	2,593.79	
27 15 13 00-0236	MLF	12-Pair 22 AWG, PE-39 Outdoor Telecommunications Cable, Buried In Trench	3,363.28	
27 15 13 00-0237	MLF	25-Pair 22 AWG, PE-39 Outdoor Telecommunications Cable, Buried In Trench	5,000.81	
27 15 13 00-0238	MLF	50-Pair 22 AWG, PE-39 Outdoor Telecommunications Cable, Buried In Trench	8,013.27	
27 15 13 00-0239	MLF	100-Pair 22 AWG, PE-39 Outdoor Telecommunications Cable, Buried In Trench	14,299.88	
27 15 13 00-0240	MLF	200-Pair 22 AWG, PE-39 Outdoor Telecommunications Cable, Buried In Trench	27,013.33	
27 15 13 00-0241	MLF	300-Pair 22 AWG, PE-39 Outdoor Telecommunications Cable, Buried In Trench	39,246.68	
27 15 13 00-0242	MLF	400-Pair 22 AWG, PE-39 Outdoor Telecommunications Cable, Buried In Trench	49,714.51	
27 15 13 00-0243	MLF	600-Pair 22 AWG, PE-39 Outdoor Telecommunications Cable, Buried In Trench	68,975.37	
27 15 13 00-0244	MLF	900-Pair 22 AWG, PE-39 Outdoor Telecommunications Cable, Buried In Trench	105,162.08	
27 15 13 00-0245		19 AWG, PE-39 Outdoor Telecommunications Cable *(27 15 13 00-0196)*		
27 15 13 00-0246		19 AWG, PE-39 Outdoor Telecommunications Cable, Installed In Conduit *(27 15 13 00-0245)*		
27 15 13 00-0247	MLF	25-Pair 19 AWG, PE-39 Outdoor Telecommunications Cable, Installed In Conduit	8,966.71	947.52
27 15 13 00-0248	MLF	50-Pair 19 AWG, PE-39 Outdoor Telecommunications Cable, Installed In Conduit	15,076.38	947.52
27 15 13 00-0249	MLF	100-Pair 19 AWG, PE-39 Outdoor Telecommunications Cable, Installed In Conduit	27,745.68	947.52
27 15 13 00-0250		19 AWG, PE-39 Outdoor Telecommunications Cable, Buried In Trench *(27 15 13 00-0245)*		
27 15 13 00-0251	MLF	25-Pair 19 AWG, PE-39 Outdoor Telecommunications Cable, Buried In Trench	8,628.30	
27 15 13 00-0252	MLF	50-Pair 19 AWG, PE-39 Outdoor Telecommunications Cable, Buried In Trench	14,737.97	
27 15 13 00-0253	MLF	100-Pair 19 AWG, PE-39 Outdoor Telecommunications Cable, Buried In Trench	27,407.27	
27 15 13 00-0254		(Aerial) Outdoor Telecommunications Cable *(27 15 13 00-0129)* Note: Includes support wire.		
27 15 13 00-0255		24 AWG, (Aerial) Outdoor Telecommunications Cable, Installed On Poles *(27 15 13 00-0254)*		
27 15 13 00-0256	MLF	6-Pair 24 AWG, (Aerial) Outdoor Telecommunications Cable, Installed On Poles	7,721.43	1,947.62
27 15 13 00-0257	MLF	12-Pair 24 AWG, (Aerial) Outdoor Telecommunications Cable, Installed On Poles	8,157.14	1,947.62
27 15 13 00-0258	MLF	25-Pair 24 AWG, (Aerial) Outdoor Telecommunications Cable, Installed On Poles	9,238.92	1,947.62
27 15 13 00-0259	MLF	50-Pair 24 AWG, (Aerial) Outdoor Telecommunications Cable, Installed On Poles	11,241.82	1,947.62
27 15 13 00-0260	MLF	100-Pair 24 AWG, (Aerial) Outdoor Telecommunications Cable, Installed On Poles	15,110.39	1,947.62
27 15 13 00-0261	MLF	200-Pair 24 AWG, (Aerial) Outdoor Telecommunications Cable, Installed On Poles	23,244.16	2,142.37
27 15 13 00-0262	MLF	300-Pair 24 AWG, (Aerial) Outdoor Telecommunications Cable, Installed On Poles	31,425.78	2,337.13
27 15 13 00-0263		22 AWG, (Aerial) Outdoor Telecommunications Cable, Installed On Poles *(27 15 13 00-0254)*		
27 15 13 00-0264	MLF	6-Pair 22 AWG, (Aerial) Outdoor Telecommunications Cable, Installed On Poles	8,242.71	1,947.62
27 15 13 00-0265	MLF	12-Pair 22 AWG, (Aerial) Outdoor Telecommunications Cable, Installed On Poles	8,886.45	1,947.62
27 15 13 00-0266	MLF	25-Pair 22 AWG, (Aerial) Outdoor Telecommunications Cable, Installed On Poles	10,436.95	1,947.62
27 15 13 00-0267	MLF	50-Pair 22 AWG, (Aerial) Outdoor Telecommunications Cable, Installed On Poles	13,500.10	1,947.62
27 15 13 00-0268	MLF	100-Pair 22 AWG, (Aerial) Outdoor Telecommunications Cable, Installed On Poles	20,232.66	1,947.62
27 15 13 00-0269	MLF	200-Pair 22 AWG, (Aerial) Outdoor Telecommunications Cable, Installed On Poles	32,460.26	2,142.37
27 15 13 00-0270		19 AWG, (Aerial) Outdoor Telecommunications Cable, Installed On Poles *(27 15 13 00-0254)*		
27 15 13 00-0271	MLF	6-Pair 19 AWG, (Aerial) Outdoor Telecommunications Cable, Installed On Poles	8,931.89	1,947.62
27 15 13 00-0272	MLF	12-Pair 19 AWG, (Aerial) Outdoor Telecommunications Cable, Installed On Poles	10,387.67	1,947.62
27 15 13 00-0273	MLF	25-Pair 19 AWG, (Aerial) Outdoor Telecommunications Cable, Installed On Poles	13,249.97	1,947.62
27 15 13 00-0274	MLF	50-Pair 19 AWG, (Aerial) Outdoor Telecommunications Cable, Installed On Poles	18,974.62	1,947.62
27 15 13 00-0275	MLF	100-Pair 19 AWG, (Aerial) Outdoor Telecommunications Cable, Installed On Poles	30,468.61	1,947.62
27 15 13 00-0276		Solid Conductor Low Voltage Cable *(27 15 13)*		
27 15 13 00-0277		Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit *(27 15 13 00-0276)*		
27 15 13 00-0278		#12 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit *(27 15 13 00-0277)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 13 00-0279	MLF	1 Pair #12 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,997.31	1,020.21
		For #10 AWG, Add	*438.05*	
27 15 13 00-0280	MLF	2 Pair #12 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,308.69	1,056.28
		For #10 AWG, Add	*532.94*	
27 15 13 00-0281	MLF	3 Pair #12 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,584.86	1,093.38
		For #10 AWG, Add	*616.17*	
27 15 13 00-0282	MLF	4 Pair #12 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,876.69	1,130.47
		For #10 AWG, Add	*704.30*	
27 15 13 00-0283	MLF	5 Pair #12 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	3,219.16	1,206.73
		For #10 AWG, Add	*800.79*	
27 15 13 00-0284	MLF	6 Pair #12 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	3,535.48	1,281.96
		For #10 AWG, Add	*888.88*	
27 15 13 00-0285	MLF	8 Pair #12 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	3,862.85	1,434.48
		For #10 AWG, Add	*964.00*	
27 15 13 00-0286	MLF	12 Pair #12 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	5,114.40	1,891.00
		For #10 AWG, Add	*1,278.12*	
27 15 13 00-0287	MLF	24 Pair #12 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	7,598.32	2,792.69
		For #10 AWG, Add	*1,902.52*	

27 15 13 00-0288 #14 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit *(27 15 13 00-0277)*

27 15 13 00-0289	MLF	1 Pair #14 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,770.62	892.43
27 15 13 00-0290	MLF	2 Pair #14 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,063.94	924.38
27 15 13 00-0291	MLF	3 Pair #14 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,323.31	956.31
27 15 13 00-0292	MLF	4 Pair #14 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,596.65	989.29
27 15 13 00-0293	MLF	5 Pair #14 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,913.71	1,056.28
27 15 13 00-0294	MLF	6 Pair #14 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	3,205.40	1,122.23
27 15 13 00-0295	MLF	8 Pair #14 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	3,498.88	1,255.17
27 15 13 00-0296	MLF	12 Pair #14 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	4,632.54	1,653.98
27 15 13 00-0297	MLF	24 Pair #14 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	6,886.47	2,443.35

27 15 13 00-0298 #16 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit *(27 15 13 00-0277)*

27 15 13 00-0299	MLF	1 Pair #16 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,578.06	796.59
27 15 13 00-0300	MLF	2 Pair #16 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,776.47	825.45
27 15 13 00-0301	MLF	3 Pair #16 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,065.18	854.29
27 15 13 00-0302	MLF	4 Pair #16 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,307.25	883.15
27 15 13 00-0303	MLF	5 Pair #16 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,587.39	942.92
27 15 13 00-0304	MLF	6 Pair #16 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,845.96	1,001.66
27 15 13 00-0305	MLF	7 Pair #16 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,976.10	1,061.43
27 15 13 00-0306	MLF	8 Pair #16 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	3,107.27	1,121.20
27 15 13 00-0307	MLF	9 Pair #16 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	3,432.27	1,192.31
27 15 13 00-0308	MLF	12 Pair #16 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	4,113.32	1,476.73
27 15 13 00-0309	MLF	24 Pair #16 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	6,114.07	2,181.60

27 15 13 00-0310 #18 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit *(27 15 13 00-0277)*

27 15 13 00-0311	MLF	1 Pair #18 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,344.93	701.78
27 15 13 00-0312	MLF	2 Pair #18 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,536.24	726.52

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 13 00-0313	MLF	3 Pair #18 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,706.44	751.24
27 15 13 00-0314	MLF	4 Pair #18 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,884.70	777.00
27 15 13 00-0315	MLF	5 Pair #18 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,100.23	829.57
27 15 13 00-0316	MLF	6 Pair #18 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,300.26	881.09
27 15 13 00-0317	MLF	8 Pair #18 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,518.48	986.21
27 15 13 00-0318	MLF	12 Pair #18 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	3,332.56	1,299.48
27 15 13 00-0319	MLF	24 Pair #18 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	4,949.37	1,919.85
27 15 13 00-0320		**#20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit** *(27 15 13 00-0277)*		
27 15 13 00-0321	MLF	1 Pair #20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,197.97	637.89
27 15 13 00-0322	MLF	2 Pair #20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,351.39	660.56
27 15 13 00-0323	MLF	3 Pair #20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,487.11	683.75
27 15 13 00-0324	MLF	4 Pair #20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,629.53	706.93
27 15 13 00-0325	MLF	5 Pair #20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,807.93	754.34
27 15 13 00-0326	MLF	6 Pair #20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,973.96	801.74
27 15 13 00-0327	MLF	8 Pair #20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,176.30	896.55
27 15 13 00-0328	MLF	12 Pair #20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,865.68	1,182.00
27 15 13 00-0329	MLF	24 Pair #20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	4,253.69	1,745.69
27 15 13 00-0330	MLF	25 Pair #20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	4,474.47	1,786.91
27 15 13 00-0331	MLF	36 Pair #20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	5,301.18	2,080.61
27 15 13 00-0332	MLF	40 Pair #20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	5,684.49	2,226.95
27 15 13 00-0333	MLF	50 Pair #20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	6,872.23	2,783.42
27 15 13 00-0334	MLF	100 Pair #20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	9,267.97	3,664.51
27 15 13 00-0335		**#22 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit** *(27 15 13 00-0277)*		
27 15 13 00-0336	MLF	1 Pair #22 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,027.20	574.00
27 15 13 00-0337	MLF	2 Pair #22 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,087.34	594.61
27 15 13 00-0338	MLF	3 Pair #22 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,158.44	615.22
27 15 13 00-0339	MLF	4 Pair #22 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,234.51	635.83
27 15 13 00-0340	MLF	5 Pair #22 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,354.86	679.11
27 15 13 00-0341	MLF	6 Pair #22 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,475.05	719.30
27 15 13 00-0342		**Triad** *(27 15 13 00-0277)*		
27 15 13 00-0343	MLF	1 Triad #16 AWG, Stranded, Low Voltage, Installed In Conduit	2,955.11	854.29
27 15 13 00-0344	MLF	4 Triad #20 AWG, Stranded, Low Voltage, Installed In Conduit	3,811.55	1,182.00
27 15 13 00-0345	MLF	8 Triad #20 AWG, Stranded, Low Voltage, Installed In Conduit	6,011.85	1,745.69
27 15 13 00-0346	MLF	12 Triad #20 AWG, Stranded, Low Voltage, Installed In Conduit	7,540.02	2,080.61
27 15 13 00-0347	MLF	24 Triad #20 AWG, Stranded, Low Voltage, Installed In Conduit	12,450.15	3,223.45
27 15 13 00-0348	MLF	36 Triad #20 AWG, Stranded, Low Voltage, Installed In Conduit	14,348.40	3,664.51
27 15 13 00-0349		**Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed** *(27 15 13 00-0276)*		
27 15 13 00-0350		**#12 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed** *(27 15 13 00-0349)*		
27 15 13 00-0351	MLF	1 Pair #12 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	3,697.80	2,040.42
		For #10 AWG, Add	*778.15*	
		For Work In Restricted Working Space, Add	*1,020.30*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 13 00-0352	MLF	2 Pair #12 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	4,069.68	2,112.55
		For #10 AWG, Add	*885.14*	
		For Work In Restricted Working Space, Add	*1,056.59*	
27 15 13 00-0353	MLF	3 Pair #12 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	4,406.63	2,186.76
		For #10 AWG, Add	*980.53*	
		For Work In Restricted Working Space, Add	*1,093.07*	
27 15 13 00-0354	MLF	4 Pair #12 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	4,761.39	2,260.95
		For #10 AWG, Add	*1,081.24*	
		For Work In Restricted Working Space, Add	*1,130.82*	
27 15 13 00-0355	MLF	5 Pair #12 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	5,230.98	2,413.47
		For #10 AWG, Add	*1,203.15*	
		For Work In Restricted Working Space, Add	*1,207.09*	
27 15 13 00-0356	MLF	6 Pair #12 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	5,672.64	2,563.92
		For #10 AWG, Add	*1,316.31*	
		For Work In Restricted Working Space, Add	*1,282.30*	
27 15 13 00-0357	MLF	8 Pair #12 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	6,253.19	2,868.95
		For #10 AWG, Add	*1,442.06*	
		For Work In Restricted Working Space, Add	*1,434.20*	
27 15 13 00-0358	MLF	12 Pair #12 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	8,265.44	3,781.99
		For #10 AWG, Add	*1,908.32*	
		For Work In Restricted Working Space, Add	*1,890.63*	
27 15 13 00-0359	MLF	24 Pair #12 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	12,251.61	5,585.39
		For #10 AWG, Add	*2,833.18*	
		For Work In Restricted Working Space, Add	*2,791.97*	

27 15 13 00-0360 #14 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed *(27 15 13 00-0349)*

27 15 13 00-0361	MLF	1 Pair #14 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	3,257.66	1,784.85
		For Work In Restricted Working Space, Add	*892.22*	
27 15 13 00-0362	MLF	2 Pair #14 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	3,604.56	1,848.74
		For Work In Restricted Working Space, Add	*924.37*	
27 15 13 00-0363	MLF	3 Pair #14 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	3,917.51	1,912.64
		For Work In Restricted Working Space, Add	*956.52*	
27 15 13 00-0364	MLF	4 Pair #14 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	4,245.46	1,978.59
		For Work In Restricted Working Space, Add	*989.29*	
27 15 13 00-0365	MLF	5 Pair #14 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	4,673.83	2,112.55
		For Work In Restricted Working Space, Add	*1,056.07*	
27 15 13 00-0366	MLF	6 Pair #14 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	5,074.76	2,244.46
		For Work In Restricted Working Space, Add	*1,121.61*	
27 15 13 00-0367	MLF	8 Pair #14 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	5,590.83	2,510.33
		For Work In Restricted Working Space, Add	*1,255.17*	
27 15 13 00-0368	MLF	12 Pair #14 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	7,389.15	3,307.95
		For Work In Restricted Working Space, Add	*1,653.97*	
27 15 13 00-0369	MLF	24 Pair #14 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	10,959.07	4,886.70
		For Work In Restricted Working Space, Add	*2,443.56*	

27 15 13 00-0370 #16 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed *(27 15 13 00-0349)*

27 15 13 00-0371	MLF	1 Pair #16 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	2,906.40	1,593.17
		For Work In Restricted Working Space, Add	*797.00*	
27 15 13 00-0372	MLF	2 Pair #16 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	3,152.20	1,650.88
		For Work In Restricted Working Space, Add	*825.44*	
27 15 13 00-0373	MLF	3 Pair #16 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	3,488.32	1,708.59
		For Work In Restricted Working Space, Add	*853.88*	
27 15 13 00-0374	MLF	4 Pair #16 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	3,779.86	1,766.30
		For Work In Restricted Working Space, Add	*883.56*	
27 15 13 00-0375	MLF	5 Pair #16 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	4,158.92	1,885.84
		For Work In Restricted Working Space, Add	*942.92*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 13 00-0376	MLF	6 Pair #16 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	4,515.40	2,003.33
		For Work In Restricted Working Space, Add	*1,001.66*	
27 15 13 00-0377	MLF	7 Pair #16 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	4,744.47	2,122.86
		For Work In Restricted Working Space, Add	*1,061.02*	
27 15 13 00-0378	MLF	8 Pair #16 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	4,975.59	2,242.40
		For Work In Restricted Working Space, Add	*1,120.99*	
27 15 13 00-0379	MLF	9 Pair #16 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	5,419.10	2,384.61
		For Work In Restricted Working Space, Add	*1,192.10*	
27 15 13 00-0380	MLF	12 Pair #16 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	6,574.70	2,953.45
		For Work In Restricted Working Space, Add	*1,476.83*	
27 15 13 00-0381	MLF	24 Pair #16 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	9,750.24	4,363.20
		For Work In Restricted Working Space, Add	*2,181.70*	

27 15 13 00-0382 #18 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed *(27 15 13 00-0349)*

27 15 13 00-0383	MLF	1 Pair #18 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	2,513.54	1,403.56
		For Work In Restricted Working Space, Add	*701.16*	
27 15 13 00-0384	MLF	2 Pair #18 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	2,747.10	1,453.02
		For Work In Restricted Working Space, Add	*726.51*	
27 15 13 00-0385	MLF	3 Pair #18 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	2,959.55	1,502.49
		For Work In Restricted Working Space, Add	*751.86*	
27 15 13 00-0386	MLF	4 Pair #18 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	3,180.05	1,554.02
		For Work In Restricted Working Space, Add	*777.21*	
27 15 13 00-0387	MLF	5 Pair #18 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	3,483.18	1,659.12
		For Work In Restricted Working Space, Add	*829.77*	
27 15 13 00-0388	MLF	6 Pair #18 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	3,769.76	1,762.18
		For Work In Restricted Working Space, Add	*881.71*	
27 15 13 00-0389	MLF	8 Pair #18 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	4,162.15	1,972.40
		For Work In Restricted Working Space, Add	*986.20*	
27 15 13 00-0390	MLF	12 Pair #18 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	5,498.70	2,598.95
		For Work In Restricted Working Space, Add	*1,299.68*	
27 15 13 00-0391	MLF	24 Pair #18 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	8,149.10	3,839.69
		For Work In Restricted Working Space, Add	*1,919.84*	

27 15 13 00-0392 #20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed *(27 15 13 00-0349)*

27 15 13 00-0393	MLF	1 Pair #20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	2,260.43	1,275.78
		For Work In Restricted Working Space, Add	*637.48*	
27 15 13 00-0394	MLF	2 Pair #20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	2,451.98	1,321.12
		For Work In Restricted Working Space, Add	*660.35*	
27 15 13 00-0395	MLF	3 Pair #20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	2,625.82	1,367.50
		For Work In Restricted Working Space, Add	*683.23*	
27 15 13 00-0396	MLF	4 Pair #20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	2,807.41	1,413.86
		For Work In Restricted Working Space, Add	*706.73*	
27 15 13 00-0397	MLF	5 Pair #20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	3,064.65	1,508.67
		For Work In Restricted Working Space, Add	*754.03*	
27 15 13 00-0398	MLF	6 Pair #20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	3,309.50	1,603.48
		For Work In Restricted Working Space, Add	*801.33*	
27 15 13 00-0399	MLF	8 Pair #20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	3,670.55	1,793.09
		For Work In Restricted Working Space, Add	*896.55*	
27 15 13 00-0400	MLF	12 Pair #20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	4,834.99	2,364.00
		For Work In Restricted Working Space, Add	*1,181.59*	
27 15 13 00-0401	MLF	24 Pair #20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	7,162.82	3,491.38
		For Work In Restricted Working Space, Add	*1,745.48*	
27 15 13 00-0402	MLF	25 Pair #20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	7,452.64	3,573.83
		For Work In Restricted Working Space, Add	*1,786.91*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 13 00-0403	MLF	36 Pair #20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	8,768.88	4,161.21
		For Work In Restricted Working Space, Add	*2,080.62*	
27 15 13 00-0404	MLF	40 Pair #20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	9,396.39	4,453.88
		For Work In Restricted Working Space, Add	*2,227.14*	
27 15 13 00-0405	MLF	50 Pair #20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	11,510.55	5,566.83
		For Work In Restricted Working Space, Add	*2,783.00*	
27 15 13 00-0406	MLF	100 Pair #20 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	15,374.76	7,329.02
		For Work In Restricted Working Space, Add	*3,664.07*	

27 15 13 00-0407 #22 AWG, Shielded, Low Voltage Cable, Installed Exposed *(27 15 13 00-0349)*

27 15 13 00-0408	MLF	1 Pair #22 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	1,983.53	1,148.00
		For Work In Restricted Working Space, Add	*573.79*	
27 15 13 00-0409	MLF	2 Pair #22 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	2,077.66	1,189.21
		For Work In Restricted Working Space, Add	*594.20*	
27 15 13 00-0410	MLF	3 Pair #22 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	2,183.80	1,230.43
		For Work In Restricted Working Space, Add	*615.22*	
27 15 13 00-0411	MLF	4 Pair #22 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	2,294.91	1,271.66
		For Work In Restricted Working Space, Add	*636.24*	
27 15 13 00-0412	MLF	5 Pair #22 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	2,486.37	1,358.22
		For Work In Restricted Working Space, Add	*678.90*	
27 15 13 00-0413	MLF	6 Pair #22 AWG, Solid, Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	2,674.57	1,438.60
		For Work In Restricted Working Space, Add	*719.71*	

27 15 13 00-0414 Triad, Installed Exposed *(27 15 13 00-0349)*

27 15 13 00-0415	MLF	1 Triad, #16 AWG, Stranded, Low Voltage Copper Communication Cable, Installed Exposed	2,955.11	854.29
27 15 13 00-0416	MLF	4 Triad, #20 AWG, Stranded, Low Voltage Copper Communication Cable, Installed Exposed	3,811.55	1,182.00
27 15 13 00-0417	MLF	8 Triad, #20 AWG, Stranded, Low Voltage Copper Communication Cable, Installed Exposed	6,011.85	1,745.69
27 15 13 00-0418	MLF	12 Triad, #20 AWG, Stranded, Low Voltage Copper Communication Cable, Installed Exposed	7,540.02	2,080.61
27 15 13 00-0419	MLF	24 Triad, #20 AWG, Stranded, Low Voltage Copper Communication Cable, Installed Exposed	12,450.15	3,223.45
27 15 13 00-0420	MLF	36 Triad, #20 AWG, Stranded, Low Voltage Copper Communication Cable, Installed Exposed	14,348.40	3,664.51

27 15 13 00-0421 Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit *(27 15 13 00-0276)*

27 15 13 00-0422 #14 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit *(27 15 13 00-0421)*

27 15 13 00-0423	MLF	1 Pair #14 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,701.16	892.43
		For Work In Restricted Working Space, Add	*446.11*	
27 15 13 00-0424	MLF	2 Pair #14 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,935.76	924.38
		For Work In Restricted Working Space, Add	*462.19*	
27 15 13 00-0425	MLF	3 Pair #14 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,144.73	956.31
		For Work In Restricted Working Space, Add	*478.26*	
27 15 13 00-0426	MLF	4 Pair #14 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,364.49	989.29
		For Work In Restricted Working Space, Add	*494.65*	
27 15 13 00-0427	MLF	5 Pair #14 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,629.08	1,055.24
		For Work In Restricted Working Space, Add	*527.42*	
27 15 13 00-0428	MLF	6 Pair #14 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,877.13	1,121.20
		For Work In Restricted Working Space, Add	*560.50*	
27 15 13 00-0429	MLF	8 Pair #14 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	3,154.26	1,255.17
		For Work In Restricted Working Space, Add	*627.58*	
27 15 13 00-0430	MLF	12 Pair #14 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	4,173.05	1,653.98
		For Work In Restricted Working Space, Add	*826.99*	
27 15 13 00-0431	MLF	24 Pair #14 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	6,197.24	2,443.35
		For Work In Restricted Working Space, Add	*1,221.78*	

27 15 13 00-0432 #16 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit *(27 15 13 00-0421)*

27 15 13 00-0433	MLF	1 Pair #16 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,516.89	796.59
		For Work In Restricted Working Space, Add	*398.50*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 13 00-0434	MLF	2 Pair #16 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,723.70	825.45
		For Work In Restricted Working Space, Add	*412.72*	
27 15 13 00-0435	MLF	3 Pair #16 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,907.92	854.29
		For Work In Restricted Working Space, Add	*426.94*	
27 15 13 00-0436	MLF	4 Pair #16 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,102.81	883.15
		For Work In Restricted Working Space, Add	*441.78*	
27 15 13 00-0437	MLF	5 Pair #16 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,337.53	941.89
		For Work In Restricted Working Space, Add	*471.15*	
27 15 13 00-0438	MLF	6 Pair #16 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,557.78	1,001.66
		For Work In Restricted Working Space, Add	*500.83*	
27 15 13 00-0439	MLF	7 Pair #16 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,680.28	1,061.43
		For Work In Restricted Working Space, Add	*530.51*	
27 15 13 00-0440	MLF	8 Pair #16 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,864.27	1,121.20
		For Work In Restricted Working Space, Add	*560.50*	
27 15 13 00-0441	MLF	9 Pair #16 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	3,148.67	1,192.31
		For Work In Restricted Working Space, Add	*596.02*	
27 15 13 00-0442	MLF	12 Pair #16 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	3,708.70	1,476.73
		For Work In Restricted Working Space, Add	*738.42*	
27 15 13 00-0443	MLF	24 Pair #16 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	5,507.64	2,181.60
		For Work In Restricted Working Space, Add	*1,091.00*	

27 15 13 00-0444 #18 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit *(27 15 13 00-0421)*

27 15 13 00-0445	MLF	1 Pair #18 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,325.97	700.75
		For Work In Restricted Working Space, Add	*350.58*	
27 15 13 00-0446	MLF	2 Pair #18 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,493.04	726.52
		For Work In Restricted Working Space, Add	*363.26*	
27 15 13 00-0447	MLF	3 Pair #18 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,600.40	752.28
		For Work In Restricted Working Space, Add	*375.93*	
27 15 13 00-0448	MLF	4 Pair #18 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,740.35	777.00
		For Work In Restricted Working Space, Add	*388.61*	
27 15 13 00-0449	MLF	5 Pair #18 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,914.76	829.57
		For Work In Restricted Working Space, Add	*414.89*	
27 15 13 00-0450	MLF	6 Pair #18 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,088.16	882.12
		For Work In Restricted Working Space, Add	*440.86*	
27 15 13 00-0451	MLF	8 Pair #18 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,490.23	986.21
		For Work In Restricted Working Space, Add	*493.10*	
27 15 13 00-0452	MLF	12 Pair #18 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	3,239.98	1,299.48
		For Work In Restricted Working Space, Add	*649.84*	
27 15 13 00-0453	MLF	24 Pair #18 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	4,372.60	1,919.85
		For Work In Restricted Working Space, Add	*959.92*	

27 15 13 00-0454 #20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit *(27 15 13 00-0421)*

27 15 13 00-0455	MLF	1 Pair #20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,173.55	637.89
		For Work In Restricted Working Space, Add	*318.74*	
27 15 13 00-0456	MLF	2 Pair #20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,289.96	660.56
		For Work In Restricted Working Space, Add	*330.18*	
27 15 13 00-0457	MLF	3 Pair #20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,516.15	752.28
		For Work In Restricted Working Space, Add	*375.93*	
27 15 13 00-0458	MLF	4 Pair #20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,659.05	790.82
		For Work In Restricted Working Space, Add	*395.41*	
27 15 13 00-0459	MLF	5 Pair #20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,799.15	829.57
		For Work In Restricted Working Space, Add	*414.89*	
27 15 13 00-0460	MLF	6 Pair #20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,951.55	882.12
		For Work In Restricted Working Space, Add	*440.86*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 13 00-0461	MLF	8 Pair #20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,151.44	981.67
		For Work In Restricted Working Space, Add	*490.94*	
27 15 13 00-0462	MLF	12 Pair #20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,646.12	1,182.00
		For Work In Restricted Working Space, Add	*590.79*	
27 15 13 00-0463	MLF	24 Pair #20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	3,924.35	1,745.69
		For Work In Restricted Working Space, Add	*872.74*	
27 15 13 00-0464	MLF	25 Pair #20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	4,107.97	1,786.91
		For Work In Restricted Working Space, Add	*893.45*	
27 15 13 00-0465	MLF	36 Pair #20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	4,852.08	2,080.61
		For Work In Restricted Working Space, Add	*1,040.31*	
27 15 13 00-0466	MLF	40 Pair #20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	5,201.32	2,226.95
		For Work In Restricted Working Space, Add	*1,113.57*	
27 15 13 00-0467	MLF	50 Pair #20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	6,325.06	2,783.42
		For Work In Restricted Working Space, Add	*1,391.50*	
27 15 13 00-0468	MLF	100 Pair #20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	8,493.67	3,664.51
		For Work In Restricted Working Space, Add	*1,832.04*	
27 15 13 00-0469		#22 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit *(27 15 13 00-0421)*		
27 15 13 00-0470	MLF	1 Pair #22 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,029.96	574.00
		For Work In Restricted Working Space, Add	*286.89*	
27 15 13 00-0471	MLF	2 Pair #22 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,091.11	594.61
		For Work In Restricted Working Space, Add	*297.10*	
27 15 13 00-0472	MLF	3 Pair #22 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,168.66	615.22
		For Work In Restricted Working Space, Add	*307.61*	
27 15 13 00-0473	MLF	4 Pair #22 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,252.51	635.83
		For Work In Restricted Working Space, Add	*318.12*	
27 15 13 00-0474	MLF	5 Pair #22 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,369.28	679.11
		For Work In Restricted Working Space, Add	*339.45*	
27 15 13 00-0475	MLF	6 Pair #22 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,492.84	719.30
		For Work In Restricted Working Space, Add	*359.86*	
27 15 13 00-0476		Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed *(27 15 13 00-0276)*		
27 15 13 00-0477		#14 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed *(27 15 13 00-0476)*		
27 15 13 00-0478	MLF	1 Pair #14 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	3,188.20	1,784.85
		For Work In Restricted Working Space, Add	*892.22*	
27 15 13 00-0479	MLF	2 Pair #14 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	3,476.38	1,848.74
		For Work In Restricted Working Space, Add	*924.37*	
27 15 13 00-0480	MLF	3 Pair #14 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	3,738.93	1,912.64
		For Work In Restricted Working Space, Add	*956.52*	
27 15 13 00-0481	MLF	4 Pair #14 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	4,013.30	1,978.59
		For Work In Restricted Working Space, Add	*989.29*	
27 15 13 00-0482	MLF	5 Pair #14 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	4,387.15	2,110.50
		For Work In Restricted Working Space, Add	*1,054.84*	
27 15 13 00-0483	MLF	6 Pair #14 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	4,745.44	2,242.40
		For Work In Restricted Working Space, Add	*1,120.99*	
27 15 13 00-0484	MLF	8 Pair #14 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	5,246.21	2,510.33
		For Work In Restricted Working Space, Add	*1,255.17*	
27 15 13 00-0485	MLF	12 Pair #14 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	6,929.66	3,307.95
		For Work In Restricted Working Space, Add	*1,653.97*	
27 15 13 00-0486	MLF	24 Pair #14 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	10,269.84	4,886.70
		For Work In Restricted Working Space, Add	*2,443.56*	
27 15 13 00-0487		#16 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed *(27 15 13 00-0476)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 13 00-0488	MLF	1 Pair #16 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	2,845.23	1,593.17
		For Work In Restricted Working Space, Add	*797.00*	
27 15 13 00-0489	MLF	2 Pair #16 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	3,099.43	1,650.88
		For Work In Restricted Working Space, Add	*825.44*	
27 15 13 00-0490	MLF	3 Pair #16 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	3,331.06	1,708.59
		For Work In Restricted Working Space, Add	*853.88*	
27 15 13 00-0491	MLF	4 Pair #16 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	3,575.42	1,766.30
		For Work In Restricted Working Space, Add	*883.56*	
27 15 13 00-0492	MLF	5 Pair #16 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	3,908.03	1,883.78
		For Work In Restricted Working Space, Add	*942.30*	
27 15 13 00-0493	MLF	6 Pair #16 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	4,227.22	2,003.33
		For Work In Restricted Working Space, Add	*1,001.66*	
27 15 13 00-0494	MLF	7 Pair #16 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	4,448.65	2,122.86
		For Work In Restricted Working Space, Add	*1,061.02*	
27 15 13 00-0495	MLF	8 Pair #16 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	4,732.59	2,242.40
		For Work In Restricted Working Space, Add	*1,120.99*	
27 15 13 00-0496	MLF	9 Pair #16 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	5,135.40	2,384.61
		For Work In Restricted Working Space, Add	*1,192.04*	
27 15 13 00-0497	MLF	12 Pair #16 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	6,170.07	2,953.45
		For Work In Restricted Working Space, Add	*1,476.83*	
27 15 13 00-0498	MLF	24 Pair #16 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	9,144.31	4,363.20
		For Work In Restricted Working Space, Add	*2,182.01*	
27 15 13 00-0499		**#18 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed** *(27 15 13 00-0476)*		
27 15 13 00-0500	MLF	1 Pair #18 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	2,494.58	1,401.50
		For Work In Restricted Working Space, Add	*701.16*	
27 15 13 00-0501	MLF	2 Pair #18 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	2,703.90	1,453.02
		For Work In Restricted Working Space, Add	*726.51*	
27 15 13 00-0502	MLF	3 Pair #18 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	2,853.51	1,504.55
		For Work In Restricted Working Space, Add	*751.86*	
27 15 13 00-0503	MLF	4 Pair #18 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	3,035.70	1,554.02
		For Work In Restricted Working Space, Add	*777.21*	
27 15 13 00-0504	MLF	5 Pair #18 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	3,297.71	1,659.12
		For Work In Restricted Working Space, Add	*829.77*	
27 15 13 00-0505	MLF	6 Pair #18 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	3,557.66	1,764.24
		For Work In Restricted Working Space, Add	*881.71*	
27 15 13 00-0506	MLF	8 Pair #18 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	4,133.90	1,972.40
		For Work In Restricted Working Space, Add	*986.20*	
27 15 13 00-0507	MLF	12 Pair #18 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	5,406.12	2,598.95
		For Work In Restricted Working Space, Add	*1,299.68*	
27 15 13 00-0508	MLF	24 Pair #18 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	7,572.33	3,839.69
		For Work In Restricted Working Space, Add	*1,919.84*	
27 15 13 00-0509		**#20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed** *(27 15 13 00-0476)*		
27 15 13 00-0510	MLF	1 Pair #20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	2,236.01	1,275.78
		For Work In Restricted Working Space, Add	*637.48*	
27 15 13 00-0511	MLF	2 Pair #20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	2,390.55	1,321.12
		For Work In Restricted Working Space, Add	*660.35*	
27 15 13 00-0512	MLF	3 Pair #20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	2,769.26	1,504.55
		For Work In Restricted Working Space, Add	*751.86*	
27 15 13 00-0513	MLF	4 Pair #20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	2,977.07	1,581.63
		For Work In Restricted Working Space, Add	*790.82*	
27 15 13 00-0514	MLF	5 Pair #20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	3,182.10	1,659.12
		For Work In Restricted Working Space, Add	*829.77*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 13 00-0515	MLF	6 Pair #20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	3,421.05	1,764.24
		For Work In Restricted Working Space, Add	*881.71*	
27 15 13 00-0516	MLF	8 Pair #20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	3,787.91	1,963.34
		For Work In Restricted Working Space, Add	*981.88*	
27 15 13 00-0517	MLF	12 Pair #20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	4,615.43	2,364.00
		For Work In Restricted Working Space, Add	*1,181.59*	
27 15 13 00-0518	MLF	24 Pair #20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	6,833.48	3,491.38
		For Work In Restricted Working Space, Add	*1,745.48*	
27 15 13 00-0519	MLF	25 Pair #20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	7,086.14	3,573.83
		For Work In Restricted Working Space, Add	*1,786.91*	
27 15 13 00-0520	MLF	36 Pair #20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	8,319.78	4,161.21
		For Work In Restricted Working Space, Add	*2,080.62*	
27 15 13 00-0521	MLF	40 Pair #20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	8,913.22	4,453.88
		For Work In Restricted Working Space, Add	*2,227.14*	
27 15 13 00-0522	MLF	50 Pair #20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	10,963.38	5,566.83
		For Work In Restricted Working Space, Add	*2,783.00*	
27 15 13 00-0523	MLF	100 Pair #20 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	14,600.46	7,329.02
		For Work In Restricted Working Space, Add	*3,664.07*	

27 15 13 00-0524 #22 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed *(27 15 13 00-0476)*

27 15 13 00-0525	MLF	1 Pair #22 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	1,986.29	1,148.00
		For Work In Restricted Working Space, Add	*573.79*	
27 15 13 00-0526	MLF	2 Pair #22 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	2,081.43	1,189.21
		For Work In Restricted Working Space, Add	*594.20*	
27 15 13 00-0527	MLF	3 Pair #22 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	2,194.02	1,230.43
		For Work In Restricted Working Space, Add	*615.22*	
27 15 13 00-0528	MLF	4 Pair #22 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	2,312.91	1,271.66
		For Work In Restricted Working Space, Add	*636.24*	
27 15 13 00-0529	MLF	5 Pair #22 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	2,500.79	1,358.22
		For Work In Restricted Working Space, Add	*678.90*	
27 15 13 00-0530	MLF	6 Pair #22 AWG, Solid, Non-Shielded, Non-Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed Exposed	2,692.36	1,438.60
		For Work In Restricted Working Space, Add	*719.71*	

27 15 13 00-0531 Solid, Shielded, Low Voltage, Alarm And Communications Cable, Buried In Trench *(27 15 13 00-0276)*

Note: Excludes excavation.

27 15 13 00-0532	MLF	1 Pair, #14 AWG, Solid, Shielded, Low Voltage, Alarm And Communications Cable, Buried In Trench	1,691.21
27 15 13 00-0533	MLF	2 Pair, #14 AWG, Solid, Shielded, Low Voltage, Alarm And Communications Cable, Buried In Trench	1,980.33
27 15 13 00-0534	MLF	3 Pair, #14 AWG, Solid, Shielded, Low Voltage, Alarm And Communications Cable, Buried In Trench	2,236.80
27 15 13 00-0535	MLF	4 Pair, #14 AWG, Solid, Shielded, Low Voltage, Alarm And Communications Cable, Buried In Trench	2,507.75
27 15 13 00-0536	MLF	5 Pair, #14 AWG, Solid, Shielded, Low Voltage, Alarm And Communications Cable, Buried In Trench	2,818.56
27 15 13 00-0537	MLF	6 Pair, #14 AWG, Solid, Shielded, Low Voltage, Alarm And Communications Cable, Buried In Trench	3,104.99

27 15 13 00-0538 Solid, Shielded, Low Voltage, Alarm And Communications Cable, Installed On Poles (Aerial) *(27 15 13 00-0276)*

27 15 13 00-0539	MLF	1 Pair, #14 AWG, Solid, Shielded, Low Voltage, Alarm And Communications Cable, Installed On Poles (Aerial)	1,796.24	568.10
27 15 13 00-0540	MLF	2 Pair, #14 AWG, Solid, Shielded, Low Voltage, Alarm And Communications Cable, Installed On Poles (Aerial)	2,144.02	608.63
27 15 13 00-0541	MLF	3 Pair, #14 AWG, Solid, Shielded, Low Voltage, Alarm And Communications Cable, Installed On Poles (Aerial)	2,777.84	769.42
27 15 13 00-0542	MLF	4 Pair, #14 AWG, Solid, Shielded, Low Voltage, Alarm And Communications Cable, Installed On Poles (Aerial)	3,317.51	889.93
27 15 13 00-0543	MLF	5 Pair, #14 AWG, Solid, Shielded, Low Voltage, Alarm And Communications Cable, Installed On Poles (Aerial)	10,502.44	1,014.34
27 15 13 00-0544	MLF	6 Pair, #14 AWG, Solid, Shielded, Low Voltage, Alarm And Communications Cable, Installed On Poles (Aerial)	12,486.14	1,295.90

27 15 13 00-0545 Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit *(27 15 13 00-0276)*

27 15 13 00-0546	MLF	1 Pair #16 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,530.93	796.59
27 15 13 00-0547	MLF	2 Pair #16 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,853.71	825.45
27 15 13 00-0548	MLF	3 Pair #16 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,080.83	854.29
27 15 13 00-0549	MLF	4 Pair #16 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,201.99	883.15

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 13 00-0550	MLF	5 Pair #16 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,646.98	941.89
27 15 13 00-0551	MLF	6 Pair #16 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,864.36	1,001.66
27 15 13 00-0552	MLF	8 Pair #16 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	3,589.03	1,121.20
27 15 13 00-0553	MLF	12 Pair #16 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	4,455.94	1,476.73
27 15 13 00-0554	MLF	24 Pair #16 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	6,767.41	2,181.60
27 15 13 00-0555	MLF	1 Pair #18 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,322.23	700.75
27 15 13 00-0556	MLF	2 Pair #18 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,587.22	726.52
27 15 13 00-0557	MLF	3 Pair #18 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,806.32	752.28
27 15 13 00-0558	MLF	4 Pair #18 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,914.53	777.00
27 15 13 00-0559	MLF	5 Pair #18 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,294.60	829.57
27 15 13 00-0560	MLF	6 Pair #18 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,578.34	882.12
27 15 13 00-0561	MLF	8 Pair #18 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,912.61	986.21
27 15 13 00-0562	MLF	12 Pair #18 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	3,762.64	1,299.48
27 15 13 00-0563	MLF	24 Pair #18 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	6,016.08	1,919.85
27 15 13 00-0564	MLF	1 Pair #20 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,167.61	637.89
27 15 13 00-0565	MLF	2 Pair #20 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,335.75	660.56
27 15 13 00-0566	MLF	3 Pair #20 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,498.68	683.23
27 15 13 00-0567	MLF	4 Pair #20 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,601.36	706.93
27 15 13 00-0568	MLF	5 Pair #20 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,744.24	754.34
27 15 13 00-0569	MLF	6 Pair #20 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,905.17	801.74
27 15 13 00-0570	MLF	8 Pair #20 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,133.77	896.55
27 15 13 00-0571	MLF	12 Pair #20 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,944.38	1,182.00
27 15 13 00-0572	MLF	24 Pair #20 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	4,475.43	1,745.69
27 15 13 00-0573	MLF	25 Pair #20 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	4,721.12	1,786.91
27 15 13 00-0574	MLF	36 Pair #20 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	5,573.69	2,080.61
27 15 13 00-0575	MLF	40 Pair #20 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	6,009.82	2,226.95
27 15 13 00-0576	MLF	50 Pair #20 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	7,240.66	2,783.42
27 15 13 00-0577	MLF	100 Pair #20 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	9,789.33	3,664.51
27 15 13 00-0578	MLF	250 Pair #20 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	18,930.80	6,749.87
27 15 13 00-0579	MLF	500 Pair #20 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	28,610.38	8,932.50
27 15 13 00-0580	MLF	750 Pair #20 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	38,325.00	11,256.31
27 15 13 00-0581	MLF	1200 Pair #20 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	53,982.56	15,440.20
27 15 13 00-0582	MLF	1 Pair #22 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,129.73	637.89
27 15 13 00-0583	MLF	2 Pair #22 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,251.02	660.56
27 15 13 00-0584	MLF	3 Pair #22 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,368.98	683.23
27 15 13 00-0585	MLF	4 Pair #22 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,448.77	706.93
27 15 13 00-0586	MLF	5 Pair #22 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,568.76	754.34
27 15 13 00-0587	MLF	6 Pair #22 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,699.92	801.74
27 15 13 00-0588	MLF	8 Pair #22 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,903.33	896.55
27 15 13 00-0589	MLF	12 Pair #22 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,593.04	1,182.00
27 15 13 00-0590	MLF	24 Pair #22 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	3,911.06	1,745.69
27 15 13 00-0591	MLF	25 Pair #22 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	4,093.10	1,786.91

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 13 00-0592	MLF	36 Pair #22 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	4,833.96	2,080.61
27 15 13 00-0593	MLF	40 Pair #22 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	5,181.83	2,226.95
27 15 13 00-0594	MLF	50 Pair #22 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	6,302.97	2,783.42
27 15 13 00-0595	MLF	100 Pair #22 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	8,462.43	3,664.51
27 15 13 00-0596	MLF	250 Pair #22 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	16,122.73	6,749.87
27 15 13 00-0597	MLF	500 Pair #22 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	23,652.68	8,932.50
27 15 13 00-0598	MLF	750 Pair #22 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	31,258.34	11,256.31
27 15 13 00-0599	MLF	1200 Pair #22 AWG, Solid, Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	43,780.55	15,440.20

27 15 13 00-0600 Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit *(27 15 13 00-0276)*

27 15 13 00-0601	MLF	1 Pair #16 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,545.99	796.59
27 15 13 00-0602	MLF	2 Pair #16 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,766.03	825.45
27 15 13 00-0603	MLF	3 Pair #16 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,903.49	854.29
27 15 13 00-0604	MLF	4 Pair #16 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,087.02	883.15
27 15 13 00-0605	MLF	5 Pair #16 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,307.08	941.89
27 15 13 00-0606	MLF	6 Pair #16 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,525.06	1,001.66
27 15 13 00-0607	MLF	8 Pair #16 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	3,039.18	1,121.20
27 15 13 00-0608	MLF	12 Pair #16 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	3,947.99	1,476.73
27 15 13 00-0609	MLF	24 Pair #16 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	5,888.33	2,181.60
27 15 13 00-0610	MLF	1 Pair #18 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,353.61	700.75
27 15 13 00-0611	MLF	2 Pair #18 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,542.59	726.52
27 15 13 00-0612	MLF	3 Pair #18 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,661.40	752.28
27 15 13 00-0613	MLF	4 Pair #18 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,818.50	777.00
27 15 13 00-0614	MLF	5 Pair #18 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,008.17	829.57
27 15 13 00-0615	MLF	6 Pair #18 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,196.81	882.12
27 15 13 00-0616	MLF	8 Pair #18 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,638.90	986.21
27 15 13 00-0617	MLF	12 Pair #18 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	3,429.32	1,299.48
27 15 13 00-0618	MLF	24 Pair #18 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	5,113.65	1,919.85
27 15 13 00-0619	MLF	1 Pair #20 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,193.06	637.89
27 15 13 00-0620	MLF	2 Pair #20 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,355.78	660.56
27 15 13 00-0621	MLF	3 Pair #20 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,470.46	683.23
27 15 13 00-0622	MLF	4 Pair #20 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,676.83	706.93
27 15 13 00-0623	MLF	5 Pair #20 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,860.67	754.34
27 15 13 00-0624	MLF	6 Pair #20 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,209.79	801.74
27 15 13 00-0625	MLF	8 Pair #20 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,469.96	896.55
27 15 13 00-0626	MLF	12 Pair #20 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	3,125.16	1,182.00
27 15 13 00-0627	MLF	24 Pair #20 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	4,710.45	1,745.69
27 15 13 00-0628	MLF	25 Pair #20 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	4,981.59	1,786.91
27 15 13 00-0629	MLF	36 Pair #20 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	5,922.77	2,080.61
27 15 13 00-0630	MLF	40 Pair #20 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	6,353.23	2,226.95
27 15 13 00-0631	MLF	50 Pair #20 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	7,629.55	2,783.42
27 15 13 00-0632	MLF	100 Pair #20 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	10,339.66	3,664.51

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 13 00-0633	MLF	250 Pair #20 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	20,096.16	6,749.87
27 15 13 00-0634	MLF	500 Pair #20 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	30,667.49	8,932.50
27 15 13 00-0635	MLF	750 Pair #20 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	41,256.81	11,256.31
27 15 13 00-0636	MLF	1200 Pair #20 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	58,215.08	15,439.17
27 15 13 00-0637	MLF	1 Pair #22 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,146.00	637.89
27 15 13 00-0638	MLF	2 Pair #22 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,263.83	660.56
27 15 13 00-0639	MLF	3 Pair #22 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,350.94	683.23
27 15 13 00-0640	MLF	4 Pair #22 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,497.05	706.93
27 15 13 00-0641	MLF	5 Pair #22 AWG, Solid, Low Voltage, Plenum Rated, Non-Shielded, Installed In Conduit	1,643.24	754.34
27 15 13 00-0642	MLF	6 Pair #22 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	1,894.79	801.74
27 15 13 00-0643	MLF	8 Pair #22 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,118.39	896.55
27 15 13 00-0644	MLF	12 Pair #22 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	2,708.68	1,182.00
27 15 13 00-0645	MLF	24 Pair #22 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	4,061.40	1,745.69
27 15 13 00-0646	MLF	25 Pair #22 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	4,259.72	1,786.91
27 15 13 00-0647	MLF	36 Pair #22 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	5,038.14	2,080.61
27 15 13 00-0648	MLF	40 Pair #22 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	5,401.50	2,226.95
27 15 13 00-0649	MLF	50 Pair #22 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	6,551.74	2,783.42
27 15 13 00-0650	MLF	100 Pair #22 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	8,814.47	3,664.51
27 15 13 00-0651	MLF	250 Pair #22 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	16,868.13	6,749.87
27 15 13 00-0652	MLF	500 Pair #22 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	24,968.66	8,932.50
27 15 13 00-0653	MLF	750 Pair #22 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	33,134.30	11,256.31
27 15 13 00-0654	MLF	1200 Pair #22 AWG, Solid, Non-Shielded, Plenum Rated, Low Voltage, Alarm And Communications Cable, Installed In Conduit	46,488.98	15,440.20

27 15 13 00-0655 Sound System Cables *(27 15 13)*

Note: Cables shall be type CL2 or CM and as manufactured by West Penn Wire, Belden or approved equal.

27 15 13 00-0656 Speaker/Communications And Control Cable, Installed Exposed *(27 15 13 00-0655)*

27 15 13 00-0657 Non-Plenum Rated Speaker/Communications And Control Cable, Installed Exposed *(27 15 13 00-0656)*

27 15 13 00-0658	MLF	2 Conductor, #16 AWG, Stranded, Unshielded, Non-Plenum Rated, Speaker/Communications And Control Cable, Installed Exposed	1,752.45	721.36
		For Work In Restricted Working Space, Add	*432.82*	
27 15 13 00-0659	MLF	2 Conductor, #18 AWG, Stranded, Unshielded, Non-Plenum Rated, Speaker/Communications And Control Cable, Installed Exposed	1,647.98	721.36
		For Work In Restricted Working Space, Add	*432.82*	
27 15 13 00-0660	MLF	2 Conductor, #22 AWG, Stranded, Unshielded, Non-Plenum Rated, Speaker/Communications And Control Cable, Installed Exposed	1,567.40	721.36
		For Work In Restricted Working Space, Add	*432.82*	
27 15 13 00-0661	MLF	4 Conductor, #22 AWG, Stranded, Unshielded, Non-Plenum Rated, Speaker/Communications And Control Cable, Installed Exposed	1,655.52	721.36
		For Work In Restricted Working Space, Add	*432.82*	
27 15 13 00-0662	MLF	4 Conductor, #18 AWG, Stranded, Shielded, Non-Plenum Rated, Speaker/Communications And Control Cable, Installed Exposed	1,938.74	721.36
		For Work In Restricted Working Space, Add	*432.82*	
27 15 13 00-0663	MLF	6 Conductor, #18 AWG, Stranded, Shielded, Non-Plenum Rated, Speaker/Communications And Control Cable, Installed Exposed	2,221.03	721.36
		For Work In Restricted Working Space, Add	*432.82*	
27 15 13 00-0664	MLF	4 Conductor, #20 AWG, Stranded, 2 Shielded, 2 Unshielded, Non-Plenum Rated, Speaker/Communications And Control Cable, Installed Exposed	1,939.93	721.36
		For Work In Restricted Working Space, Add	*432.82*	
27 15 13 00-0665	MLF	4 Conductor, #22 AWG, Stranded, 2 Shielded, 2 Unshielded, Non-Plenum Rated, Speaker/Communications And Control Cable, Installed Exposed	1,803.94	721.36
		For Work In Restricted Working Space, Add	*432.82*	

27 15 13 00-0666 Plenum Rated Speaker/Communications And Control Cable, Installed Exposed *(27 15 13 00-0656)*

27 15 13 00-0667	MLF	2 Conductor, #16 AWG, Stranded, Unshielded, Plenum Rated, Speaker/Communications And Control Cable, Installed Exposed	1,795.61	721.36
		For Work In Restricted Working Space, Add	*432.82*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 13 00-0668	MLF	2 Conductor, #18 AWG, Stranded, Unshielded, Plenum Rated, Speaker/Communications And Control Cable, Installed Exposed	1,675.43	721.36
		For Work In Restricted Working Space, Add	*432.82*	
27 15 13 00-0669	MLF	2 Conductor, #22 AWG, Stranded, Unshielded, Plenum Rated, Speaker/Communications And Control Cable, Installed Exposed	1,607.41	721.36
		For Work In Restricted Working Space, Add	*432.82*	
27 15 13 00-0670	MLF	4 Conductor, #22 AWG, Stranded, Unshielded, Plenum Rated, Speaker/Communications And Control Cable, Installed Exposed	1,720.92	721.36
		For Work In Restricted Working Space, Add	*432.82*	
27 15 13 00-0671	MLF	8 Conductors, #22 AWG, Stranded, Unshielded, Plenum Rated, Speaker/Communications And Control Cable, Installed Exposed	1,960.71	721.36
		For Work In Restricted Working Space, Add	*432.82*	
27 15 13 00-0672	MLF	2 Conductors, #16 AWG, Stranded, Shielded, Plenum Rated, Speaker/Communications And Control Cable, Installed Exposed	1,934.26	721.36
		For Work In Restricted Working Space, Add	*432.82*	
27 15 13 00-0673	MLF	2 Conductors, #18 AWG, Stranded, Shielded, Plenum Rated, Speaker/Communications And Control Cable, Installed Exposed	1,768.03	721.36
		For Work In Restricted Working Space, Add	*432.82*	
27 15 13 00-0674	MLF	4 Conductor, #18 AWG, Stranded, Shielded, Plenum Rated, Speaker/Communications And Control Cable, Installed Exposed	2,050.59	721.36
		For Work In Restricted Working Space, Add	*432.82*	
27 15 13 00-0675	MLF	6 Conductor, #18 AWG, Stranded, Shielded, Plenum Rated, Speaker/Communications And Control Cable, Installed Exposed	2,332.37	721.36
		For Work In Restricted Working Space, Add	*432.82*	
27 15 13 00-0676	MLF	2 Conductor, #22 AWG, Stranded, Shielded, Plenum Rated, Speaker/Communications And Control Cable, Installed Exposed	1,641.52	721.36
		For Work In Restricted Working Space, Add	*432.82*	
27 15 13 00-0677	MLF	2 Conductor, #20 AWG, Stranded, Shielded, Plenum Rated, Speaker/Communications And Control Cable, Installed Exposed	1,697.66	721.36
		For Work In Restricted Working Space, Add	*432.82*	

27 15 13 00-0678 Speaker/Communications And Control Cable, Installed In Conduit *(27 15 13 00-0655)*

27 15 13 00-0679 Non-Plenum Rated Speaker/Communications And Control Cable, Installed In Conduit *(27 15 13 00-0678)*

27 15 13 00-0680	MLF	2 Conductors, #16 AWG, Stranded, Unshielded, Non-Plenum Rated, Speaker/Communications And Control Cable, Installed In Conduit	1,031.09	360.68
27 15 13 00-0681	MLF	2 Conductors, #18 AWG, Stranded, Unshielded, Non-Plenum Rated, Speaker/Communications And Control Cable, Installed In Conduit	926.62	360.68
27 15 13 00-0682	MLF	2 Conductors, #22 AWG, Stranded, Unshielded, Non-Plenum Rated, Speaker/Communications And Control Cable, Installed In Conduit	846.04	360.68
27 15 13 00-0683	MLF	4 Conductors, #22 AWG, Stranded, Unshielded, Non-Plenum Rated, Speaker/Communications And Control Cable, Installed In Conduit	934.16	360.68
27 15 13 00-0684	MLF	4 Conductors, #18 AWG, Stranded, Shielded, Non-Plenum Rated, Speaker/Communications And Control Cable, Installed In Conduit	1,217.38	360.68
27 15 13 00-0685	MLF	6 Conductors, #18 AWG, Stranded, Shielded, Non-Plenum Rated, Speaker/Communications And Control Cable, Installed In Conduit	1,499.67	360.68
27 15 13 00-0686	MLF	4 Conductors (2 Shielded, 2 Unshielded), #20 AWG, Stranded, Non-Plenum Rated, Microphone/Communications Cable, Installed In Conduit	1,218.57	360.68
27 15 13 00-0687	MLF	4 Conductors (2 Shielded, 2 Unshielded), #22 AWG, Stranded, Non-Plenum Rated, Microphone/Communications Cable, Installed In Conduit	1,082.58	360.68

27 15 13 00-0688 Plenum Rated Speaker/Communications And Control Cable, Installed In Conduit *(27 15 13 00-0678)*

27 15 13 00-0689	MLF	2 Conductor, #6 AWG, Stranded, Unshielded, Plenum Rated, Speaker/Communications And Control Cable, Installed In Conduit	1,074.25	360.68
27 15 13 00-0690	MLF	2 Conductor, #18 AWG, Stranded, Unshielded, Plenum Rated, Speaker/Communications And Control Cable, Installed In Conduit	954.07	360.68
27 15 13 00-0691	MLF	2 Conductor, #22 AWG, Stranded, Unshielded, Plenum Rated, Speaker/Communications And Control Cable, Installed In Conduit	886.05	360.68
27 15 13 00-0692	MLF	4 Conductor, #22 AWG, Stranded, Unshielded, Plenum Rated, Speaker/Communications And Control Cable, Installed In Conduit	999.56	360.68
27 15 13 00-0693	MLF	8 Conductor, #22 AWG, Stranded, Unshielded, Plenum Rated, Speaker/Communications And Control Cable, Installed In Conduit	1,239.35	360.68
27 15 13 00-0694	MLF	2 Conductor, #16 AWG, Stranded, Shielded, Plenum Rated, Speaker/Communications And Control Cable, Installed In Conduit	1,212.90	360.68
27 15 13 00-0695	MLF	2 Conductor, #18 AWG, Stranded, Shielded, Plenum Rated, Speaker/Communications And Control Cable, Installed In Conduit	1,046.67	360.68
27 15 13 00-0696	MLF	4 Conductor, #18 AWG, Stranded, Shielded, Plenum Rated, Speaker/Communications And Control Cable, Installed In Conduit	1,329.23	360.68
27 15 13 00-0697	MLF	6 Conductor, #18 AWG, Stranded, Shielded, Plenum Rated, Speaker/Communications And Control Cable, Installed In Conduit	1,611.01	360.68
27 15 13 00-0698	MLF	2 Conductor, #20 AWG, Stranded, Shielded, Plenum Rated, Microphone/Communications And Control Cable, Installed In Conduit	976.30	360.68
27 15 13 00-0699	MLF	2 Conductor, #22 AWG, Stranded, Shielded, Plenum Rated, Microphone/Communications And Control Cable, Installed In Conduit	920.16	360.68

27 15 23 Communications Optical Fiber Horizontal Cabling *(27 15)*

Note: Cable installed in conduit includes pull wires and installation in conduit, innerduct, wiremold, etc. Cable installed exposed includes installation on exposed surfaces, uncovered wireways, cable trays, etc.

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 23 00-0001		**Indoor Fiber Optic Cable** *(27 15 23)* Note: Distribution cables contain multiple tight-buffered fibers bundled under the same jacket with Kevlar strength members. Break-out cables contain multiple individually reinforced and jacketed simplex cables bundled together.		
27 15 23 00-0002		**Indoor Fiber Optic Cable, Installed In Conduit** *(27 15 23 00-0001)* Note: Excludes conduit or innerduct.		
27 15 23 00-0003		**Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit** *(27 15 23 00-0002)*		
27 15 23 00-0004		**Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit** *(27 15 23 00-0003)*		
27 15 23 00-0005		**Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit** *(27 15 23 00-0004)*		
27 15 23 00-0006	MLF	1-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	989.53	406.09
27 15 23 00-0007	MLF	2-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	1,083.78	406.09
27 15 23 00-0008	MLF	4-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	1,115.25	406.09
27 15 23 00-0009	MLF	6-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	1,227.32	406.09
		For Aluminum Armored Cable, Add	*842.23*	
		For Steel Armored Cable, Add	*1,644.81*	
27 15 23 00-0010	MLF	8-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	1,259.45	406.09
27 15 23 00-0011	MLF	12-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	1,453.68	406.09
		For Aluminum Armored Cable, Add	*888.79*	
		For Steel Armored Cable, Add	*1,727.08*	
27 15 23 00-0012	MLF	18-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	2,506.57	473.77
27 15 23 00-0013	MLF	24-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	3,544.08	473.77
		For Aluminum Armored Cable With Sub-Units, Add	*1,780.56*	
		For Steel Armored Cable, Add	*2,342.85*	
27 15 23 00-0014	MLF	36-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	4,332.59	473.77
		For Aluminum Armored Cable With Sub-Units, Add	*1,877.04*	
		For Steel Armored Cable, Add	*2,144.16*	
27 15 23 00-0015	MLF	48-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	4,485.53	473.77
		For Aluminum Armored Cable With Sub-Units, Add	*1,969.39*	
		For Steel Armored Cable, Add	*2,245.50*	
27 15 23 00-0016	MLF	60-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	5,449.93	473.77
27 15 23 00-0017	MLF	72-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	5,706.39	473.77
27 15 23 00-0018	MLF	96-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	7,055.41	473.77
27 15 23 00-0019	MLF	120-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	9,487.21	541.44
27 15 23 00-0020	MLF	144-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	11,326.81	541.44
27 15 23 00-0021		**50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit** *(27 15 23 00-0004)*		
27 15 23 00-0022	MLF	1-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	1,016.67	406.09
27 15 23 00-0023	MLF	2-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	1,112.77	406.09
27 15 23 00-0024	MLF	4-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	1,371.62	406.09
27 15 23 00-0025	MLF	6-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	1,644.10	406.09
		For Aluminum Armored Cable, Add	*958.14*	
		For Steel Armored Cable, Add	*1,252.82*	
27 15 23 00-0026	MLF	8-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	1,902.96	406.09
27 15 23 00-0027	MLF	12-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	2,434.30	406.09
		For Aluminum Armored Cable, Add	*965.11*	
		For Steel Armored Cable, Add	*1,349.07*	
27 15 23 00-0028	MLF	18-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	2,683.35	473.77
27 15 23 00-0029	MLF	24-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	4,604.33	473.77
		For Aluminum Armored Cable With Sub-Units, Add	*875.68*	
		For Steel Armored Cable, Add	*875.68*	
27 15 23 00-0030	MLF	36-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	6,511.69	473.77
27 15 23 00-0031	MLF	48-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	8,419.05	473.77
		For Aluminum Armored Cable With Sub-Units, Add	*1,562.67*	
27 15 23 00-0032	MLF	60-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	10,326.41	473.77
27 15 23 00-0033	MLF	72-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	12,233.77	473.77
27 15 23 00-0034	MLF	96-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	16,062.11	473.77
		For Aluminum Armored Cable With Sub-Units, Add	*6,730.26*	
27 15 23 00-0035	MLF	120-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	19,989.63	541.44
27 15 23 00-0036	MLF	144-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	23,804.35	541.44

copyright 2026 The Gordian Group, Inc.

	MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 23 00-0037			**62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit** *(27 15 23 00-0004)*		
27 15 23 00-0038		MLF	1-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	1,033.67	406.09
27 15 23 00-0039		MLF	2-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	1,134.57	406.09
27 15 23 00-0040		MLF	4-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	1,406.37	406.09
27 15 23 00-0041		MLF	6-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	1,692.47	406.09
27 15 23 00-0042		MLF	8-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	1,964.27	406.09
27 15 23 00-0043		MLF	12-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	2,522.17	406.09
27 15 23 00-0044		MLF	18-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	2,778.03	473.77
27 15 23 00-0045		MLF	24-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	4,795.07	473.77
27 15 23 00-0046		MLF	36-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	6,797.79	473.77
27 15 23 00-0047		MLF	48-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	8,800.52	473.77
27 15 23 00-0048		MLF	60-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	10,803.25	473.77
27 15 23 00-0049		MLF	72-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	12,805.98	473.77
27 15 23 00-0050		MLF	96-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	16,825.74	473.77
27 15 23 00-0051		MLF	120-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	20,944.00	541.44
27 15 23 00-0052		MLF	144-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	24,949.45	541.44
27 15 23 00-0053			**Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit** *(27 15 23 00-0003)*		
27 15 23 00-0054			**Singlemode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit** *(27 15 23 00-0053)*		
27 15 23 00-0055		MLF	2-Fiber, Singlemode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	1,863.06	406.09
27 15 23 00-0056		MLF	4-Fiber, Singlemode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	2,214.56	406.09
27 15 23 00-0057		MLF	6-Fiber, Singlemode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	2,987.84	406.09
27 15 23 00-0058		MLF	8-Fiber, Singlemode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	3,356.88	406.09
27 15 23 00-0059		MLF	12-Fiber, Singlemode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	5,871.01	406.09
27 15 23 00-0060		MLF	18-Fiber, Singlemode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	6,193.74	473.77
27 15 23 00-0061		MLF	24-Fiber, Singlemode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	7,813.52	473.77
27 15 23 00-0062		MLF	36-Fiber, Singlemode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	11,026.69	473.77
27 15 23 00-0063		MLF	48-Fiber, Singlemode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	13,531.06	473.77
27 15 23 00-0064			**50 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit** *(27 15 23 00-0053)*		
27 15 23 00-0065		MLF	2-Fiber, 50 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	2,152.67	406.09
27 15 23 00-0066		MLF	4-Fiber, 50 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	2,618.02	406.09
27 15 23 00-0067		MLF	6-Fiber, 50 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	3,385.25	406.09
27 15 23 00-0068		MLF	8-Fiber, 50 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	4,525.58	406.09
27 15 23 00-0069		MLF	12-Fiber, 50 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	4,999.12	406.09
27 15 23 00-0070		MLF	18-Fiber, 50 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	6,683.35	473.77
27 15 23 00-0071		MLF	24-Fiber, 50 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	8,392.32	473.77
27 15 23 00-0072		MLF	36-Fiber, 50 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	9,560.74	473.77
27 15 23 00-0073		MLF	48-Fiber, 50 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	14,577.10	473.77
27 15 23 00-0074			**62.5 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit** *(27 15 23 00-0053)*		
27 15 23 00-0075		MLF	2-Fiber, 62.5 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	2,226.47	406.09
27 15 23 00-0076		MLF	4-Fiber, 62.5 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	2,715.08	406.09
27 15 23 00-0077		MLF	6-Fiber, 62.5 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	3,520.67	406.09
27 15 23 00-0078		MLF	8-Fiber, 62.5 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	4,718.02	406.09
27 15 23 00-0079		MLF	12-Fiber, 62.5 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	5,215.24	406.09

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 23 00-0080	MLF	18-Fiber, 62.5 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	6,978.04	473.77
27 15 23 00-0081	MLF	24-Fiber, 62.5 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	8,772.46	473.77
27 15 23 00-0082	MLF	36-Fiber, 62.5 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	9,999.30	473.77
27 15 23 00-0083	MLF	48-Fiber, 62.5 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	15,266.47	473.77

27 15 23 00-0084 Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit
(27 15 23 00-0002)

27 15 23 00-0085 Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit
(27 15 23 00-0084)

27 15 23 00-0086 Singlemode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit
(27 15 23 00-0085)

27 15 23 00-0087	MLF	1-Fiber, Singlemode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	980.44	406.09
27 15 23 00-0088	MLF	2-Fiber, Singlemode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	985.02	406.09
27 15 23 00-0089	MLF	4-Fiber, Singlemode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	1,225.57	406.09
27 15 23 00-0090	MLF	6-Fiber, Singlemode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	1,253.72	406.09
		For Aluminum Armored Cable, Add	*900.93*	
		For Steel Armored Cable, Add	*5,923.53*	
27 15 23 00-0091	MLF	8-Fiber, Singlemode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	1,395.41	406.09
27 15 23 00-0092	MLF	12-Fiber, Singlemode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	1,421.92	406.09
		For Aluminum Armored Cable, Add	*938.56*	
		For Steel Armored Cable, Add	*6,372.41*	
27 15 23 00-0093	MLF	18-Fiber, Singlemode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	3,218.73	473.77
27 15 23 00-0094	MLF	24-Fiber, Singlemode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	4,129.65	473.77
		For Aluminum Armored Cable With Sub-Units, Add	*908.76*	
		For Steel Armored Cable, Add	*6,979.56*	
27 15 23 00-0095	MLF	36-Fiber, Singlemode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	6,540.75	473.77
27 15 23 00-0096	MLF	48-Fiber, Singlemode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	6,710.59	473.77
		For Aluminum Armored Cable With Sub-Units, Add	*1,393.32*	
		For Steel Armored Cable, Add	*8,926.39*	
27 15 23 00-0097	MLF	60-Fiber, Singlemode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	8,092.76	473.77
27 15 23 00-0098	MLF	72-Fiber, Singlemode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	9,568.48	473.77
27 15 23 00-0099	MLF	96-Fiber, Singlemode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	12,635.32	473.77

27 15 23 00-0100 50 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit
(27 15 23 00-0085)

27 15 23 00-0101	MLF	1-Fiber, 50 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	1,014.84	406.09
27 15 23 00-0102	MLF	2-Fiber, 50 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	1,416.50	406.09
27 15 23 00-0103	MLF	4-Fiber, 50 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	1,869.65	406.09
27 15 23 00-0104	MLF	6-Fiber, 50 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	2,331.88	406.09
		For Aluminum Armored Cable, Add	*273.16*	
		For Steel Armored Cable, Add	*633.03*	
27 15 23 00-0105	MLF	8-Fiber, 50 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	2,774.79	406.09
27 15 23 00-0106	MLF	12-Fiber, 50 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	3,159.61	406.09
		For Aluminum Armored Cable, Add	*215.27*	
		For Steel Armored Cable, Add	*623.76*	
27 15 23 00-0107	MLF	18-Fiber, 50 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	4,029.84	473.77
27 15 23 00-0108	MLF	24-Fiber, 50 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	7,316.69	473.77
		For Aluminum Armored Cable With Sub-Units, Add	*1,939.01*	
		For Steel Armored Cable, Add	*4,522.33*	
27 15 23 00-0109	MLF	36-Fiber, 50 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	10,580.23	473.77
27 15 23 00-0110	MLF	48-Fiber, 50 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	13,843.77	473.77
		For Aluminum Armored Cable With Sub-Units, Add	*5,757.82*	
27 15 23 00-0111	MLF	60-Fiber, 50 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	17,107.31	473.77
27 15 23 00-0112	MLF	72-Fiber, 50 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	20,370.85	473.77
27 15 23 00-0113	MLF	96-Fiber, 50 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	26,921.24	473.77
		For Aluminum Armored Cable With Sub-Units, Add	*11,515.63*	

27 15 23 00-0114 62.5 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit
(27 15 23 00-0085)

27 15 23 00-0115	MLF	1-Fiber, 62.5 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	1,031.75	406.09

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 23 00-0116	MLF	2-Fiber, 62.5 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	1,453.49	406.09
27 15 23 00-0117	MLF	4-Fiber, 62.5 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	1,929.29	406.09
27 15 23 00-0118	MLF	6-Fiber, 62.5 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	2,414.64	406.09
27 15 23 00-0119	MLF	8-Fiber, 62.5 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	2,879.69	406.09
27 15 23 00-0120	MLF	12-Fiber, 62.5 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	3,283.75	406.09
27 15 23 00-0121	MLF	18-Fiber, 62.5 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	4,191.85	473.77
27 15 23 00-0122	MLF	24-Fiber, 62.5 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	7,643.04	473.77
27 15 23 00-0123	MLF	36-Fiber, 62.5 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	11,069.76	473.77
27 15 23 00-0124	MLF	48-Fiber, 62.5 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	14,496.48	473.77
27 15 23 00-0125	MLF	60-Fiber, 62.5 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	17,923.19	473.77
27 15 23 00-0126	MLF	72-Fiber, 62.5 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	21,349.91	473.77
27 15 23 00-0127	MLF	96-Fiber, 62.5 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	28,227.82	473.77
27 15 23 00-0128		Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit *(27 15 23 00-0084)*		
27 15 23 00-0129		Singlemode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit *(27 15 23 00-0128)*		
27 15 23 00-0130	MLF	2-Fiber, Singlemode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	2,938.02	406.09
27 15 23 00-0131	MLF	4-Fiber, Singlemode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	3,365.68	406.09
27 15 23 00-0132	MLF	6-Fiber, Singlemode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	4,393.79	406.09
27 15 23 00-0133	MLF	8-Fiber, Singlemode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	5,401.36	406.09
27 15 23 00-0134	MLF	12-Fiber, Singlemode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	7,009.43	406.09
27 15 23 00-0135	MLF	18-Fiber, Singlemode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	9,998.59	473.77
27 15 23 00-0136	MLF	24-Fiber, Singlemode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	14,426.79	473.77
27 15 23 00-0137	MLF	36-Fiber, Singlemode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	17,456.02	473.77
27 15 23 00-0138	MLF	48-Fiber, Singlemode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	21,785.19	473.77
27 15 23 00-0139		50 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit *(27 15 23 00-0128)*		
27 15 23 00-0140	MLF	2-Fiber, 50 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	4,858.07	406.09
27 15 23 00-0141	MLF	4-Fiber, 50 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	6,079.12	406.09
27 15 23 00-0142	MLF	6-Fiber, 50 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	8,258.66	406.09
27 15 23 00-0143	MLF	8-Fiber, 50 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	9,369.47	406.09
27 15 23 00-0144	MLF	12-Fiber, 50 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	11,092.69	406.09
27 15 23 00-0145	MLF	18-Fiber, 50 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	15,195.81	473.77
27 15 23 00-0146	MLF	24-Fiber, 50 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	17,861.21	473.77
27 15 23 00-0147	MLF	36-Fiber, 50 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	19,711.82	473.77
27 15 23 00-0148	MLF	48-Fiber, 50 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	31,560.13	473.77
27 15 23 00-0149		62.5 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit *(27 15 23 00-0128)*		
27 15 23 00-0150	MLF	2-Fiber, 62.5 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	5,067.13	406.09
27 15 23 00-0151	MLF	4-Fiber, 62.5 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	6,349.24	406.09
27 15 23 00-0152	MLF	6-Fiber, 62.5 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	8,637.75	406.09
27 15 23 00-0153	MLF	8-Fiber, 62.5 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	9,804.11	406.09
27 15 23 00-0154	MLF	12-Fiber, 62.5 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	11,613.49	406.09
27 15 23 00-0155	MLF	18-Fiber, 62.5 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	15,916.12	473.77
27 15 23 00-0156	MLF	24-Fiber, 62.5 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	18,714.79	473.77
27 15 23 00-0157	MLF	36-Fiber, 62.5 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	20,657.94	473.77

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 23 00-0158	MLF	48-Fiber, 62.5 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed In Conduit	33,098.66	473.77
27 15 23 00-0159		**Indoor Fiber Optic Cable, Installed Exposed** *(27 15 23 00-0001)* Note: For non-conduit installations such as cable trays, surface runways, etc.		
27 15 23 00-0160		**Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed** *(27 15 23 00-0159)*		
27 15 23 00-0161		**Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed** *(27 15 23 00-0160)*		
27 15 23 00-0162		**Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed** *(27 15 23 00-0161)*		
27 15 23 00-0163	MLF	1-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	1,215.14	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0164	MLF	2-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	1,309.39	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0165	MLF	4-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	1,340.86	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0166	MLF	6-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	1,452.93	541.44
		For Aluminum Armored Cable, Add	*842.23*	
		For Steel Armored Cable, Add	*1,644.81*	
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0167	MLF	8-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	1,485.06	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0168	MLF	12-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	1,679.29	541.44
		For Aluminum Armored Cable, Add	*888.79*	
		For Steel Armored Cable, Add	*1,727.08*	
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0169	MLF	18-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	2,732.16	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0170	MLF	24-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	3,769.67	609.12
		For Aluminum Armored Cable With Sub-Units, Add	*1,780.56*	
		For Steel Armored Cable, Add	*2,342.85*	
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0171	MLF	36-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	4,558.18	609.12
		For Aluminum Armored Cable With Sub-Units, Add	*1,877.04*	
		For Steel Armored Cable, Add	*2,144.16*	
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0172	MLF	48-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	4,711.12	609.12
		For Aluminum Armored Cable With Sub-Units, Add	*1,969.39*	
		For Steel Armored Cable, Add	*2,245.50*	
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0173	MLF	60-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	5,675.52	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0174	MLF	72-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	5,931.98	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0175	MLF	96-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	7,281.00	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0176	MLF	120-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	9,712.80	676.80
		For Work In Restricted Working Space, Add	*338.40*	
27 15 23 00-0177	MLF	144-Fiber, Singlemode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	11,552.40	676.80
		For Work In Restricted Working Space, Add	*338.40*	
27 15 23 00-0178		**50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed** *(27 15 23 00-0161)*		
27 15 23 00-0179	MLF	1-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	1,242.28	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0180	MLF	2-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	1,338.38	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0181	MLF	4-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	1,597.23	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0182	MLF	6-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	1,869.71	541.44
		For Aluminum Armored Cable, Add	*958.14*	
		For Steel Armored Cable, Add	*1,252.82*	
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0183	MLF	8-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	2,128.57	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0184	MLF	12-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	2,659.91	541.44
		For Aluminum Armored Cable, Add	*965.11*	
		For Steel Armored Cable, Add	*1,349.07*	
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0185	MLF	18-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	2,908.94	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0186	MLF	24-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	4,829.92	609.12
		For Aluminum Armored Cable With Sub-Units, Add	*875.68*	
		For Steel Armored Cable, Add	*875.68*	
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0187	MLF	36-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	6,737.28	609.12
		For Work In Restricted Working Space, Add	*304.56*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 23 00-0188	MLF	48-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	8,644.64	609.12
		For Aluminum Armored Cable With Sub-Units, Add	*1,562.67*	
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0189	MLF	60-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	10,552.00	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0190	MLF	72-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	12,459.36	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0191	MLF	96-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	16,287.70	609.12
		For Aluminum Armored Cable With Sub-Units, Add	*6,730.26*	
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0192	MLF	120-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	20,215.22	676.80
		For Work In Restricted Working Space, Add	*338.40*	
27 15 23 00-0193	MLF	144-Fiber, 50 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	24,029.94	676.80
		For Work In Restricted Working Space, Add	*338.40*	

27 15 23 00-0194 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed *(27 15 23 00-0161)*

27 15 23 00-0195	MLF	1-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	1,259.28	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0196	MLF	2-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	1,360.18	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0197	MLF	4-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	1,631.98	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0198	MLF	6-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	1,918.08	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0199	MLF	8-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	2,189.88	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0200	MLF	12-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	2,747.78	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0201	MLF	18-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	3,003.62	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0202	MLF	24-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	5,020.66	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0203	MLF	36-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	7,023.38	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0204	MLF	48-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	9,026.11	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0205	MLF	60-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	11,028.84	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0206	MLF	72-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	13,031.57	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0207	MLF	96-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	17,051.33	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0208	MLF	120-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	21,169.59	676.80
		For Work In Restricted Working Space, Add	*338.40*	
27 15 23 00-0209	MLF	144-Fiber, 62.5 Micron Multimode, Distribution Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	25,175.04	676.80
		For Work In Restricted Working Space, Add	*338.40*	

27 15 23 00-0210 Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed *(27 15 23 00-0160)*

27 15 23 00-0211 Singlemode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed *(27 15 23 00-0210)*

27 15 23 00-0212	MLF	2-Fiber, Singlemode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	2,088.67	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0213	MLF	4-Fiber, Singlemode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	2,440.17	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0214	MLF	6-Fiber, Singlemode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	3,213.45	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0215	MLF	8-Fiber, Singlemode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	3,582.49	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0216	MLF	12-Fiber, Singlemode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	6,096.62	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0217	MLF	18-Fiber, Singlemode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	6,419.33	609.12
		For Work In Restricted Working Space, Add	*304.56*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 23 00-0218	MLF	24-Fiber, Singlemode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	8,039.11	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0219	MLF	36-Fiber, Singlemode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	11,252.28	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0220	MLF	48-Fiber, Singlemode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	13,756.65	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0221		50 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed *(27 15 23 00-0210)*		
27 15 23 00-0222	MLF	2-Fiber, 50 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	2,378.28	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0223	MLF	4-Fiber, 50 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	2,843.63	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0224	MLF	6-Fiber, 50 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	3,610.86	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0225	MLF	8-Fiber, 50 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	4,751.19	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0226	MLF	12-Fiber, 50 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	5,224.73	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0227	MLF	18-Fiber, 50 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	6,908.94	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0228	MLF	24-Fiber, 50 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	8,617.91	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0229	MLF	36-Fiber, 50 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	9,786.33	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0230	MLF	48-Fiber, 50 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	14,802.69	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0231		62.5 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed *(27 15 23 00-0210)*		
27 15 23 00-0232	MLF	2-Fiber, 62.5 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	2,452.08	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0233	MLF	4-Fiber, 62.5 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	2,940.69	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0234	MLF	6-Fiber, 62.5 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	3,746.28	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0235	MLF	8-Fiber, 62.5 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	4,943.63	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0236	MLF	12-Fiber, 62.5 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	5,440.85	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0237	MLF	18-Fiber, 62.5 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	7,203.63	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0238	MLF	24-Fiber, 62.5 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	8,998.05	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0239	MLF	36-Fiber, 62.5 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	10,224.89	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0240	MLF	48-Fiber, 62.5 Micron Multimode, Break-Out Riser Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	15,492.06	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0241		Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed *(27 15 23 00-0159)*		
27 15 23 00-0242		Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed *(27 15 23 00-0241)*		
27 15 23 00-0243		Singlemode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed *(27 15 23 00-0242)*		
27 15 23 00-0244	MLF	1-Fiber, Singlemode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	1,206.05	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0245	MLF	2-Fiber, Singlemode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	1,210.63	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0246	MLF	4-Fiber, Singlemode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	1,451.18	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0247	MLF	6-Fiber, Singlemode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	1,479.33	541.44
		For Aluminum Armored Cable, Add	*900.93*	
		For Steel Armored Cable, Add	*5,923.53*	
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0248	MLF	8-Fiber, Singlemode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	1,621.02	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0249	MLF	12-Fiber, Singlemode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	1,647.53	541.44
		For Aluminum Armored Cable, Add	*938.56*	
		For Steel Armored Cable, Add	*6,372.41*	
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0250	MLF	18-Fiber, Singlemode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	3,444.32	609.12
		For Work In Restricted Working Space, Add	*304.56*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 23 00-0251	MLF	24-Fiber, Singlemode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	4,355.24	609.12
		For Aluminum Armored Cable With Sub-Units, Add	*908.76*	
		For Steel Armored Cable, Add	*6,979.56*	
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0252	MLF	36-Fiber, Singlemode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	6,766.34	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0253	MLF	48-Fiber, Singlemode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	6,936.18	609.12
		For Aluminum Armored Cable With Sub-Units, Add	*1,393.32*	
		For Steel Armored Cable, Add	*8,926.39*	
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0254	MLF	60-Fiber, Singlemode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	8,318.35	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0255	MLF	72-Fiber, Singlemode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	9,794.07	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0256	MLF	96-Fiber, Singlemode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	12,860.91	609.12
		For Work In Restricted Working Space, Add	*304.56*	

27 15 23 00-0257 50 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed *(27 15 23 00-0242)*

27 15 23 00-0258	MLF	1-Fiber, 50 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	1,240.45	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0259	MLF	2-Fiber, 50 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	1,642.11	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0260	MLF	4-Fiber, 50 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	2,095.26	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0261	MLF	6-Fiber, 50 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	2,557.49	541.44
		For Aluminum Armored Cable, Add	*273.16*	
		For Steel Armored Cable, Add	*633.03*	
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0262	MLF	8-Fiber, 50 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	3,000.40	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0263	MLF	12-Fiber, 50 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	3,385.22	541.44
		For Aluminum Armored Cable, Add	*215.27*	
		For Steel Armored Cable, Add	*623.76*	
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0264	MLF	18-Fiber, 50 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	4,255.43	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0265	MLF	24-Fiber, 50 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	7,542.28	609.12
		For Aluminum Armored Cable With Sub-Units, Add	*1,939.01*	
		For Steel Armored Cable, Add	*4,522.33*	
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0266	MLF	36-Fiber, 50 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	10,805.82	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0267	MLF	48-Fiber, 50 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	14,069.36	609.12
		For Aluminum Armored Cable With Sub-Units, Add	*5,757.82*	
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0268	MLF	60-Fiber, 50 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	17,332.90	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0269	MLF	72-Fiber, 50 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	20,596.44	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0270	MLF	96-Fiber, 50 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	27,146.83	609.12
		For Aluminum Armored Cable With Sub-Units, Add	*11,515.63*	
		For Work In Restricted Working Space, Add	*304.56*	

27 15 23 00-0271 62.5 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed *(27 15 23 00-0242)*

27 15 23 00-0272	MLF	1-Fiber, 62.5 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	1,257.36	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0273	MLF	2-Fiber, 62.5 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	1,679.10	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0274	MLF	4-Fiber, 62.5 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	2,154.90	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0275	MLF	6-Fiber, 62.5 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	2,640.25	541.44
		For Work In Restricted Working Space, Add	*270.72*	

copyright 2026 The Gordian Group, Inc.

	MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 23 00-0276		MLF	8-Fiber, 62.5 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	3,105.30	541.44
			For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0277		MLF	12-Fiber, 62.5 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	3,509.36	541.44
			For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0278		MLF	18-Fiber, 62.5 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	4,417.44	609.12
			For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0279		MLF	24-Fiber, 62.5 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	7,868.63	609.12
			For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0280		MLF	36-Fiber, 62.5 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	11,295.35	609.12
			For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0281		MLF	48-Fiber, 62.5 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	14,722.07	609.12
			For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0282		MLF	60-Fiber, 62.5 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	18,148.78	609.12
			For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0283		MLF	72-Fiber, 62.5 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	21,575.50	609.12
			For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0284		MLF	96-Fiber, 62.5 Micron Multimode, Distribution Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	28,453.41	609.12
			For Work In Restricted Working Space, Add	*304.56*	

27 15 23 00-0285 Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed *(27 15 23 00-0241)*

27 15 23 00-0286 Singlemode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed *(27 15 23 00-0285)*

27 15 23 00-0287		MLF	2-Fiber, Singlemode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	3,163.63	541.44
			For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0288		MLF	4-Fiber, Singlemode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	3,591.29	541.44
			For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0289		MLF	6-Fiber, Singlemode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	4,619.40	541.44
			For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0290		MLF	8-Fiber, Singlemode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	5,626.97	541.44
			For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0291		MLF	12-Fiber, Singlemode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	7,235.04	541.44
			For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0292		MLF	18-Fiber, Singlemode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	10,224.18	609.12
			For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0293		MLF	24-Fiber, Singlemode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	14,652.38	609.12
			For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0294		MLF	36-Fiber, Singlemode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	17,681.61	609.12
			For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0295		MLF	48-Fiber, Singlemode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	22,010.78	609.12
			For Work In Restricted Working Space, Add	*304.56*	

27 15 23 00-0296 50 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed *(27 15 23 00-0285)*

27 15 23 00-0297		MLF	2-Fiber, 50 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	5,083.68	541.44
			For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0298		MLF	4-Fiber, 50 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	6,304.73	541.44
			For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0299		MLF	6-Fiber, 50 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	8,484.27	541.44
			For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0300		MLF	8-Fiber, 50 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	9,595.08	541.44
			For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0301		MLF	12-Fiber, 50 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	11,318.30	541.44
			For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0302		MLF	18-Fiber, 50 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	15,421.40	609.12
			For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0303		MLF	24-Fiber, 50 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	18,086.80	609.12
			For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0304		MLF	36-Fiber, 50 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	19,937.41	609.12
			For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0305		MLF	48-Fiber, 50 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	31,785.72	609.12
			For Work In Restricted Working Space, Add	*304.56*	

27 15 23 00-0306 62.5 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed *(27 15 23 00-0285)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 23 00-0307	MLF	2-Fiber, 62.5 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	5,292.74	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0308	MLF	4-Fiber, 62.5 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	6,574.85	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0309	MLF	6-Fiber, 62.5 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	8,863.36	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0310	MLF	8-Fiber, 62.5 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	10,029.72	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0311	MLF	12-Fiber, 62.5 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	11,839.10	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0312	MLF	18-Fiber, 62.5 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	16,141.71	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0313	MLF	24-Fiber, 62.5 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	18,940.38	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0314	MLF	36-Fiber, 62.5 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	20,883.53	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0315	MLF	48-Fiber, 62.5 Micron Multimode, Break-Out Plenum Rated, Tight Buffer, Indoor Fiber Optic Cable, Installed Exposed	33,324.25	609.12
		For Work In Restricted Working Space, Add	*304.56*	

27 15 23 00-0316 Hybrid, Indoor Fiber Optic Cable, Installed In Conduit *(27 15 23 00-0001)*

Note: Singlemode and multimode combination cable. Excludes conduit or innerduct.

27 15 23 00-0317 Distribution Riser Rated, Hybrid, Indoor Fiber Optic Cable, Installed In Conduit *(27 15 23 00-0316)*

27 15 23 00-0318	MLF	6-Fiber, 2 Singlemode/4 Multimode, Distribution Riser Rated, Hybrid, Indoor Fiber Optic Cable, Installed In Conduit	1,442.76	406.09
27 15 23 00-0319	MLF	12-Fiber, 6 Singlemode/6 Multimode, Distribution Riser Rated, Hybrid, Indoor Fiber Optic Cable, Installed In Conduit	2,478.69	406.09
27 15 23 00-0320	MLF	24-Fiber, 12 Singlemode/12 Multimode, Distribution Riser Rated, Hybrid, Indoor Fiber Optic Cable, Installed In Conduit	5,781.25	473.77
27 15 23 00-0321	MLF	48-Fiber, 24 Singlemode/24 Multimode, Distribution Riser Rated, Hybrid, Indoor Fiber Optic Cable, Installed In Conduit	9,147.78	473.77

27 15 23 00-0322 Distribution Plenum Rated, Hybrid, Indoor Fiber Optic Cable, Installed In Conduit *(27 15 23 00-0316)*

27 15 23 00-0323	MLF	6-Fiber, 2 Singlemode/4 Multimode, Distribution Plenum Rated, Hybrid, Indoor Fiber Optic Cable, Installed In Conduit	1,729.35	406.09
27 15 23 00-0324	MLF	12-Fiber, 6 Singlemode/6 Multimode, Distribution Plenum Rated, Hybrid, Indoor Fiber Optic Cable, Installed In Conduit	2,519.01	406.09
27 15 23 00-0325	MLF	24-Fiber, 12 Singlemode/12 Multimode, Distribution Plenum Rated, Hybrid, Indoor Fiber Optic Cable, Installed In Conduit	6,872.95	473.77
27 15 23 00-0326	MLF	48-Fiber, 24 Singlemode/24 Multimode, Distribution Plenum Rated, Hybrid, Indoor Fiber Optic Cable, Installed In Conduit	11,898.70	473.77

27 15 23 00-0327 Hybrid, Indoor Fiber Optic Cable, Installed Exposed *(27 15 23 00-0001)*

Note: Singlemode and multimode combination cable. For non-conduit installations such as cable trays, surface runways, etc.

27 15 23 00-0328 Distribution Riser Rated, Hybrid, Indoor Fiber Optic Cable, Installed Exposed *(27 15 23 00-0327)*

27 15 23 00-0329	MLF	6-Fiber, 2 Singlemode/4 Multimode, Distribution Riser Rated, Hybrid, Indoor Fiber Optic Cable, Installed Exposed	1,668.37	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0330	MLF	12-Fiber, 6 Singlemode/6 Multimode, Distribution Riser Rated, Hybrid, Indoor Fiber Optic Cable, Installed Exposed	2,704.30	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0331	MLF	24-Fiber, 12 Singlemode/12 Multimode, Distribution Riser Rated, Hybrid, Indoor Fiber Optic Cable, Installed Exposed	6,006.84	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0332	MLF	48-Fiber, 24 Singlemode/24 Multimode, Distribution Riser Rated, Hybrid, Indoor Fiber Optic Cable, Installed Exposed	9,373.37	609.12
		For Work In Restricted Working Space, Add	*304.56*	

27 15 23 00-0333 Distribution Plenum Rated, Hybrid, Indoor Fiber Optic Cable, Installed Exposed *(27 15 23 00-0327)*

27 15 23 00-0334	MLF	6-Fiber, 2 Singlemode/4 Multimode, Distribution Plenum Rated, Hybrid, Indoor Fiber Optic Cable, Installed Exposed	1,954.96	541.44
		For Work In Restricted Working Space, Add	*270.72*	
27 15 23 00-0335	MLF	12-Fiber, 6 Singlemode/6 Multimode, Distribution Plenum Rated, Hybrid, Indoor Fiber Optic Cable, Installed Exposed	2,744.62	541.44
		For Work In Restricted Working Space, Add	*270.72*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 23 00-0336	MLF	24-Fiber, 12 Singlemode/12 Multimode, Distribution Plenum Rated, Hybrid, Indoor Fiber Optic Cable, Installed Exposed	7,098.54	609.12
		For Work In Restricted Working Space, Add	*304.56*	
27 15 23 00-0337	MLF	48-Fiber, 24 Singlemode/24 Multimode, Distribution Plenum Rated, Hybrid, Indoor Fiber Optic Cable, Installed Exposed	12,124.29	609.12
		For Work In Restricted Working Space, Add	*304.56*	

27 15 23 00-0338 Outdoor Fiber Optic Cable *(27 15 23)*
Note: Cable buried in trench excludes excavation.

27 15 23 00-0339 Outdoor Fiber Optic Cable, Installed In Conduit *(27 15 23 00-0338)*
Note: Excludes conduit or innerduct.

27 15 23 00-0340 Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit *(27 15 23 00-0339)*

27 15 23 00-0341 Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit *(27 15 23 00-0340)*

27 15 23 00-0342	MLF	2-Fiber, Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	1,914.88	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*274.16*	
27 15 23 00-0343	MLF	4-Fiber, Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	1,949.01	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*276.43*	
27 15 23 00-0344	MLF	6-Fiber, Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	1,983.19	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*278.63*	
27 15 23 00-0345	MLF	8-Fiber, Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,017.35	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*281.30*	
27 15 23 00-0346	MLF	12-Fiber, Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,085.22	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*254.54*	
27 15 23 00-0347	MLF	18-Fiber, Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,224.05	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*283.59*	
27 15 23 00-0348	MLF	24-Fiber, Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,295.41	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*223.25*	
27 15 23 00-0349	MLF	36-Fiber, Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,317.43	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*260.95*	
27 15 23 00-0350	MLF	48-Fiber, Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,725.84	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*287.09*	
27 15 23 00-0351	MLF	60-Fiber, Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,951.01	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*287.06*	
27 15 23 00-0352	MLF	72-Fiber, Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	3,243.15	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*339.28*	
27 15 23 00-0353	MLF	96-Fiber, Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	3,757.45	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*325.74*	
27 15 23 00-0354	MLF	120-Fiber, Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	4,319.40	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*395.55*	
27 15 23 00-0355	MLF	144-Fiber, Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	4,907.53	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*264.78*	

27 15 23 00-0356 50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit *(27 15 23 00-0340)*

27 15 23 00-0357	MLF	2-Fiber, 50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,736.37	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*-4.02*	
27 15 23 00-0358	MLF	4-Fiber, 50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,814.86	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*41.21*	
27 15 23 00-0359	MLF	6-Fiber, 50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,979.29	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*106.57*	
27 15 23 00-0360	MLF	8-Fiber, 50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	3,203.52	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*-64.62*	
27 15 23 00-0361	MLF	12-Fiber, 50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	3,296.95	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*-34.32*	
27 15 23 00-0362	MLF	18-Fiber, 50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	3,614.62	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*-16.15*	
27 15 23 00-0363	MLF	24-Fiber, 50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	4,287.31	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*-87.85*	
27 15 23 00-0364	MLF	36-Fiber, 50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	5,277.67	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*0.01*	
27 15 23 00-0365	MLF	48-Fiber, 50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	6,380.14	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*-200.97*	
27 15 23 00-0366	MLF	60-Fiber, 50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	7,146.27	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*-100.97*	
27 15 23 00-0367	MLF	72-Fiber, 50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	8,136.63	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*464.14*	
27 15 23 00-0368	MLF	96-Fiber, 50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	10,435.01	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*-208.04*	
27 15 23 00-0369	MLF	120-Fiber, 50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	12,714.70	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*-278.22*	
27 15 23 00-0370	MLF	144-Fiber, 50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	14,994.39	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*-330.75*	

27 15 23 00-0371 62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit *(27 15 23 00-0340)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 23 00-0372	MLF	2-Fiber, 62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	1,678.05	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*117.24*	
27 15 23 00-0373	MLF	4-Fiber, 62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	1,790.77	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*125.73*	
27 15 23 00-0374	MLF	6-Fiber, 62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	1,903.32	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*134.01*	
27 15 23 00-0375	MLF	8-Fiber, 62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,042.36	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*152.56*	
27 15 23 00-0376	MLF	12-Fiber, 62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,241.47	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*159.09*	
27 15 23 00-0377	MLF	18-Fiber, 62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,593.51	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*169.55*	
27 15 23 00-0378	MLF	24-Fiber, 62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,926.98	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*194.99*	
27 15 23 00-0379	MLF	36-Fiber, 62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	3,565.21	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*216.67*	
27 15 23 00-0380	MLF	48-Fiber, 62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	4,311.70	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*249.13*	
27 15 23 00-0381	MLF	60-Fiber, 62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	5,001.18	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*268.08*	
27 15 23 00-0382	MLF	72-Fiber, 62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	5,728.90	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*303.42*	
27 15 23 00-0383	MLF	96-Fiber, 62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	7,200.73	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*341.16*	
27 15 23 00-0384	MLF	120-Fiber, 62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	8,696.19	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*387.17*	
27 15 23 00-0385	MLF	144-Fiber, 62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	10,214.73	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*355.64*	

27 15 23 00-0386 Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit
(27 15 23 00-0339)

27 15 23 00-0387 Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit *(27 15 23 00-0386)*

27 15 23 00-0388	MLF	2-Fiber, Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,110.35	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*216.66*	
27 15 23 00-0389	MLF	4-Fiber, Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,176.90	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*310.97*	
27 15 23 00-0390	MLF	6-Fiber, Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,196.88	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*298.02*	
27 15 23 00-0391	MLF	8-Fiber, Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,276.61	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*248.09*	
27 15 23 00-0392	MLF	12-Fiber, Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,301.49	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*296.51*	
27 15 23 00-0393	MLF	18-Fiber, Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,413.23	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*281.21*	
27 15 23 00-0394	MLF	24-Fiber, Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,513.42	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*284.55*	
27 15 23 00-0395	MLF	36-Fiber, Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,673.24	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*360.84*	
27 15 23 00-0396	MLF	48-Fiber, Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,898.41	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*365.55*	
27 15 23 00-0397	MLF	60-Fiber, Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	3,122.70	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*378.71*	
27 15 23 00-0398	MLF	72-Fiber, Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	3,426.79	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*325.76*	
27 15 23 00-0399	MLF	96-Fiber, Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	3,918.66	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*424.84*	
27 15 23 00-0400	MLF	120-Fiber, Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	4,562.17	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*418.33*	
27 15 23 00-0401	MLF	144-Fiber, Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	5,088.76	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*334.16*	

27 15 23 00-0402 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit *(27 15 23 00-0386)*

27 15 23 00-0403	MLF	2-Fiber, 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,334.73	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*306.60*	
27 15 23 00-0404	MLF	4-Fiber, 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,567.75	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*171.70*	
27 15 23 00-0405	MLF	6-Fiber, 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,874.35	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*36.79*	
27 15 23 00-0406	MLF	8-Fiber, 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	3,021.51	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*61.32*	
27 15 23 00-0407	MLF	12-Fiber, 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	3,168.68	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*61.32*	
27 15 23 00-0408	MLF	18-Fiber, 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	3,512.07	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*73.58*	
27 15 23 00-0409	MLF	24-Fiber, 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	3,818.67	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*282.07*	
27 15 23 00-0410	MLF	36-Fiber, 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	4,480.93	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*551.88*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 23 00-0411	MLF	48-Fiber, 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	5,143.19	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*919.80*	
27 15 23 00-0412	MLF	60-Fiber, 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	5,695.07	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*1,011.78*	
27 15 23 00-0413	MLF	72-Fiber, 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	6,418.64	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*1,287.72*	
27 15 23 00-0414	MLF	96-Fiber, 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	7,927.11	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*1,900.92*	
27 15 23 00-0415	MLF	120-Fiber, 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	8,687.48	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*1,434.89*	
27 15 23 00-0416	MLF	144-Fiber, 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	10,637.46	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*3,495.24*	

27 15 23 00-0417 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit *(27 15 23 00-0386)*

27 15 23 00-0418	MLF	2-Fiber, 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	1,754.17	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*147.16*	
27 15 23 00-0419	MLF	4-Fiber, 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	1,864.54	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*159.09*	
27 15 23 00-0420	MLF	6-Fiber, 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	1,974.74	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*170.99*	
27 15 23 00-0421	MLF	8-Fiber, 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,085.11	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*182.89*	
27 15 23 00-0422	MLF	12-Fiber, 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,371.03	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*196.71*	
27 15 23 00-0423	MLF	18-Fiber, 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,651.40	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*230.52*	
27 15 23 00-0424	MLF	24-Fiber, 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	2,994.95	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*250.38*	
27 15 23 00-0425	MLF	36-Fiber, 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	3,659.92	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*309.36*	
27 15 23 00-0426	MLF	48-Fiber, 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	4,337.32	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*354.44*	
27 15 23 00-0427	MLF	60-Fiber, 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	5,017.05	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*394.69*	
27 15 23 00-0428	MLF	72-Fiber, 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	5,731.78	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*440.14*	
27 15 23 00-0429	MLF	96-Fiber, 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	7,182.15	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*518.98*	
27 15 23 00-0430	MLF	120-Fiber, 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	9,054.18	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*536.50*	
27 15 23 00-0431	MLF	144-Fiber, 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Installed In Conduit	10,151.25	812.16
		For Corrugated Coated Steel Tape Armored Cable, Add	*553.84*	

27 15 23 00-0432 Outdoor Fiber Optic Cable, Buried In Trench *(27 15 23 00-0338)*

Note: Excludes trenching.

27 15 23 00-0433 Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench *(27 15 23 00-0432)*

27 15 23 00-0434 Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench *(27 15 23 00-0433)*

27 15 23 00-0435	MLF	2-Fiber, Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	1,802.07	
		For Corrugated Coated Steel Tape Armored Cable, Add	*274.16*	
27 15 23 00-0436	MLF	4-Fiber, Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	1,836.20	
		For Corrugated Coated Steel Tape Armored Cable, Add	*276.43*	
27 15 23 00-0437	MLF	6-Fiber, Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	1,870.38	
		For Corrugated Coated Steel Tape Armored Cable, Add	*278.63*	
27 15 23 00-0438	MLF	8-Fiber, Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	1,904.54	
		For Corrugated Coated Steel Tape Armored Cable, Add	*281.30*	
27 15 23 00-0439	MLF	12-Fiber, Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	1,972.41	
		For Corrugated Coated Steel Tape Armored Cable, Add	*254.54*	
27 15 23 00-0440	MLF	18-Fiber, Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	2,111.24	
		For Corrugated Coated Steel Tape Armored Cable, Add	*283.59*	
27 15 23 00-0441	MLF	24-Fiber, Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	2,182.60	
		For Corrugated Coated Steel Tape Armored Cable, Add	*223.25*	
27 15 23 00-0442	MLF	36-Fiber, Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	2,204.62	
		For Corrugated Coated Steel Tape Armored Cable, Add	*260.95*	
27 15 23 00-0443	MLF	48-Fiber, Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	2,613.03	
		For Corrugated Coated Steel Tape Armored Cable, Add	*287.09*	
27 15 23 00-0444	MLF	60-Fiber, Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	3,125.26	
		For Corrugated Coated Steel Tape Armored Cable, Add	*287.06*	
27 15 23 00-0445	MLF	72-Fiber, Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	3,469.62	
		For Corrugated Coated Steel Tape Armored Cable, Add	*339.28*	
27 15 23 00-0446	MLF	96-Fiber, Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	3,644.64	
		For Corrugated Coated Steel Tape Armored Cable, Add	*325.74*	
27 15 23 00-0447	MLF	120-Fiber, Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	4,206.59	
		For Corrugated Coated Steel Tape Armored Cable, Add	*395.55*	
27 15 23 00-0448	MLF	144-Fiber, Singlemode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	4,794.72	
		For Corrugated Coated Steel Tape Armored Cable, Add	*264.78*	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 23 00-0449		50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench *(27 15 23 00-0433)*		
27 15 23 00-0450	MLF	2-Fiber, 50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	2,623.56	
		For Corrugated Coated Steel Tape Armored Cable, Add	*-4.02*	
27 15 23 00-0451	MLF	4-Fiber, 50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	2,702.05	
		For Corrugated Coated Steel Tape Armored Cable, Add	*41.21*	
27 15 23 00-0452	MLF	6-Fiber, 50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	2,866.48	
		For Corrugated Coated Steel Tape Armored Cable, Add	*106.57*	
27 15 23 00-0453	MLF	8-Fiber, 50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	3,090.71	
		For Corrugated Coated Steel Tape Armored Cable, Add	*-64.62*	
27 15 23 00-0454	MLF	12-Fiber, 50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	3,184.14	
		For Corrugated Coated Steel Tape Armored Cable, Add	*-34.32*	
27 15 23 00-0455	MLF	18-Fiber, 50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	3,501.81	
		For Corrugated Coated Steel Tape Armored Cable, Add	*-16.15*	
27 15 23 00-0456	MLF	24-Fiber, 50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	4,174.50	
		For Corrugated Coated Steel Tape Armored Cable, Add	*-87.85*	
27 15 23 00-0457	MLF	36-Fiber, 50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	5,164.86	
		For Corrugated Coated Steel Tape Armored Cable, Add	*0.01*	
27 15 23 00-0458	MLF	48-Fiber, 50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	6,267.33	
		For Corrugated Coated Steel Tape Armored Cable, Add	*-200.97*	
27 15 23 00-0459	MLF	60-Fiber, 50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	7,033.46	
		For Corrugated Coated Steel Tape Armored Cable, Add	*-100.97*	
27 15 23 00-0460	MLF	72-Fiber, 50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	8,023.82	
		For Corrugated Coated Steel Tape Armored Cable, Add	*464.14*	
27 15 23 00-0461	MLF	96-Fiber, 50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	10,322.20	
		For Corrugated Coated Steel Tape Armored Cable, Add	*-208.04*	
27 15 23 00-0462	MLF	120-Fiber, 50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	12,601.89	
		For Corrugated Coated Steel Tape Armored Cable, Add	*-278.22*	
27 15 23 00-0463	MLF	144-Fiber, 50 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	14,881.58	
		For Corrugated Coated Steel Tape Armored Cable, Add	*-330.75*	
27 15 23 00-0464		62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench *(27 15 23 00-0433)*		
27 15 23 00-0465	MLF	2-Fiber, 62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	1,565.24	
		For Corrugated Coated Steel Tape Armored Cable, Add	*117.24*	
27 15 23 00-0466	MLF	4-Fiber, 62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	1,677.96	
		For Corrugated Coated Steel Tape Armored Cable, Add	*125.73*	
27 15 23 00-0467	MLF	6-Fiber, 62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	1,790.51	
		For Corrugated Coated Steel Tape Armored Cable, Add	*134.01*	
27 15 23 00-0468	MLF	8-Fiber, 62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	1,929.55	
		For Corrugated Coated Steel Tape Armored Cable, Add	*152.56*	
27 15 23 00-0469	MLF	12-Fiber, 62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	2,128.66	
		For Corrugated Coated Steel Tape Armored Cable, Add	*159.09*	
27 15 23 00-0470	MLF	18-Fiber, 62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	2,480.70	
		For Corrugated Coated Steel Tape Armored Cable, Add	*169.55*	
27 15 23 00-0471	MLF	24-Fiber, 62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	2,814.17	
		For Corrugated Coated Steel Tape Armored Cable, Add	*194.99*	
27 15 23 00-0472	MLF	36-Fiber, 62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	3,452.40	
		For Corrugated Coated Steel Tape Armored Cable, Add	*216.67*	
27 15 23 00-0473	MLF	48-Fiber, 62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	4,198.89	
		For Corrugated Coated Steel Tape Armored Cable, Add	*249.13*	
27 15 23 00-0474	MLF	60-Fiber, 62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	4,888.37	
		For Corrugated Coated Steel Tape Armored Cable, Add	*268.08*	
27 15 23 00-0475	MLF	72-Fiber, 62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	5,616.09	
		For Corrugated Coated Steel Tape Armored Cable, Add	*303.42*	
27 15 23 00-0476	MLF	96-Fiber, 62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	7,087.92	
		For Corrugated Coated Steel Tape Armored Cable, Add	*341.16*	
27 15 23 00-0477	MLF	120-Fiber, 62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	8,583.38	
		For Corrugated Coated Steel Tape Armored Cable, Add	*387.17*	
27 15 23 00-0478	MLF	144-Fiber, 62.5 Micron Multimode, Single Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	10,101.92	
		For Corrugated Coated Steel Tape Armored Cable, Add	*355.64*	
27 15 23 00-0479		Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench *(27 15 23 00-0432)*		
27 15 23 00-0480		Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench *(27 15 23 00-0479)*		
27 15 23 00-0481	MLF	2-Fiber, Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	1,997.54	
		For Corrugated Coated Steel Tape Armored Cable, Add	*216.66*	
27 15 23 00-0482	MLF	4-Fiber, Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	2,064.09	
		For Corrugated Coated Steel Tape Armored Cable, Add	*310.97*	
27 15 23 00-0483	MLF	6-Fiber, Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	2,084.07	
		For Corrugated Coated Steel Tape Armored Cable, Add	*298.02*	
27 15 23 00-0484	MLF	8-Fiber, Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	2,163.80	
		For Corrugated Coated Steel Tape Armored Cable, Add	*248.09*	
27 15 23 00-0485	MLF	12-Fiber, Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	2,188.68	
		For Corrugated Coated Steel Tape Armored Cable, Add	*296.51*	
27 15 23 00-0486	MLF	18-Fiber, Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	2,300.42	
		For Corrugated Coated Steel Tape Armored Cable, Add	*281.21*	
27 15 23 00-0487	MLF	24-Fiber, Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	2,400.61	
		For Corrugated Coated Steel Tape Armored Cable, Add	*284.55*	

copyright 2026 The Gordian Group, Inc.

	MINOR CSI UOM DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 23 00-0488	MLF 36-Fiber, Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	2,560.43	
	For Corrugated Coated Steel Tape Armored Cable, Add	*360.84*	
27 15 23 00-0489	MLF 48-Fiber, Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	2,785.60	
	For Corrugated Coated Steel Tape Armored Cable, Add	*365.55*	
27 15 23 00-0490	MLF 60-Fiber, Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	3,009.89	
	For Corrugated Coated Steel Tape Armored Cable, Add	*378.71*	
27 15 23 00-0491	MLF 72-Fiber, Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	3,313.98	
	For Corrugated Coated Steel Tape Armored Cable, Add	*325.76*	
27 15 23 00-0492	MLF 96-Fiber, Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	3,805.85	
	For Corrugated Coated Steel Tape Armored Cable, Add	*424.84*	
27 15 23 00-0493	MLF 120-Fiber, Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	4,449.36	
	For Corrugated Coated Steel Tape Armored Cable, Add	*418.33*	
27 15 23 00-0494	MLF 144-Fiber, Singlemode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	4,975.95	
	For Corrugated Coated Steel Tape Armored Cable, Add	*334.16*	

27 15 23 00-0495 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench *(27 15 23 00-0479)*

27 15 23 00-0496	MLF 2-Fiber, 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	2,221.92	
	For Corrugated Coated Steel Tape Armored Cable, Add	*306.60*	
27 15 23 00-0497	MLF 4-Fiber, 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	2,454.94	
	For Corrugated Coated Steel Tape Armored Cable, Add	*171.70*	
27 15 23 00-0498	MLF 6-Fiber, 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	2,761.54	
	For Corrugated Coated Steel Tape Armored Cable, Add	*36.79*	
27 15 23 00-0499	MLF 8-Fiber, 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	2,908.70	
	For Corrugated Coated Steel Tape Armored Cable, Add	*61.32*	
27 15 23 00-0500	MLF 12-Fiber, 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	3,055.87	
	For Corrugated Coated Steel Tape Armored Cable, Add	*61.32*	
27 15 23 00-0501	MLF 18-Fiber, 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	3,399.26	
	For Corrugated Coated Steel Tape Armored Cable, Add	*73.58*	
27 15 23 00-0502	MLF 24-Fiber, 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	3,705.86	
	For Corrugated Coated Steel Tape Armored Cable, Add	*282.07*	
27 15 23 00-0503	MLF 36-Fiber, 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	4,368.12	
	For Corrugated Coated Steel Tape Armored Cable, Add	*551.88*	
27 15 23 00-0504	MLF 48-Fiber, 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	5,030.38	
	For Corrugated Coated Steel Tape Armored Cable, Add	*919.80*	
27 15 23 00-0505	MLF 60-Fiber, 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	5,582.26	
	For Corrugated Coated Steel Tape Armored Cable, Add	*1,011.78*	
27 15 23 00-0506	MLF 72-Fiber, 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	6,305.83	
	For Corrugated Coated Steel Tape Armored Cable, Add	*1,287.72*	
27 15 23 00-0507	MLF 96-Fiber, 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	7,814.30	
	For Corrugated Coated Steel Tape Armored Cable, Add	*1,900.92*	
27 15 23 00-0508	MLF 120-Fiber, 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	8,574.67	
	For Corrugated Coated Steel Tape Armored Cable, Add	*1,434.89*	
27 15 23 00-0509	MLF 144-Fiber, 50 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	10,524.65	
	For Corrugated Coated Steel Tape Armored Cable, Add	*3,495.24*	

27 15 23 00-0510 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench *(27 15 23 00-0479)*

27 15 23 00-0511	MLF 2-Fiber, 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	1,641.36	
	For Corrugated Coated Steel Tape Armored Cable, Add	*147.16*	
27 15 23 00-0512	MLF 4-Fiber, 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	1,751.73	
	For Corrugated Coated Steel Tape Armored Cable, Add	*159.09*	
27 15 23 00-0513	MLF 6-Fiber, 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	1,861.93	
	For Corrugated Coated Steel Tape Armored Cable, Add	*170.99*	
27 15 23 00-0514	MLF 8-Fiber, 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	1,972.30	
	For Corrugated Coated Steel Tape Armored Cable, Add	*182.89*	
27 15 23 00-0515	MLF 12-Fiber, 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	2,258.22	
	For Corrugated Coated Steel Tape Armored Cable, Add	*196.71*	
27 15 23 00-0516	MLF 18-Fiber, 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	2,538.59	
	For Corrugated Coated Steel Tape Armored Cable, Add	*230.52*	
27 15 23 00-0517	MLF 24-Fiber, 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	2,882.14	
	For Corrugated Coated Steel Tape Armored Cable, Add	*250.38*	
27 15 23 00-0518	MLF 36-Fiber, 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	3,547.11	
	For Corrugated Coated Steel Tape Armored Cable, Add	*309.36*	
27 15 23 00-0519	MLF 48-Fiber, 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	4,224.51	
	For Corrugated Coated Steel Tape Armored Cable, Add	*354.44*	
27 15 23 00-0520	MLF 60-Fiber, 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	4,904.24	
	For Corrugated Coated Steel Tape Armored Cable, Add	*394.69*	
27 15 23 00-0521	MLF 72-Fiber, 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	5,618.97	
	For Corrugated Coated Steel Tape Armored Cable, Add	*440.14*	
27 15 23 00-0522	MLF 96-Fiber, 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	7,069.34	
	For Corrugated Coated Steel Tape Armored Cable, Add	*518.98*	
27 15 23 00-0523	MLF 120-Fiber, 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	8,614.58	
	For Corrugated Coated Steel Tape Armored Cable, Add	*536.50*	
27 15 23 00-0524	MLF 144-Fiber, 62.5 Micron Multimode, Double Jacket Loose Tube, Outdoor Fiber Optic Cable, Buried In Trench	10,038.44	
	For Corrugated Coated Steel Tape Armored Cable, Add	*553.84*	

27 15 23 00-0525 (Aerial) Outdoor Fiber Optic Cable, Installed On Poles *(27 15 23 00-0338)*

copyright 2026 The Gordian Group, Inc.

	MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 23 00-0526			Single Jacket Loose Tube, (Aerial) Outdoor Fiber Optic Cable, Installed On Poles *(27 15 23 00-0525)*		
27 15 23 00-0527			Singlemode, Single Jacket Loose Tube, (Aerial) Outdoor Fiber Optic Cable, Installed On Poles *(27 15 23 00-0526)*		
27 15 23 00-0528	MLF		2-Fiber, Singlemode, Single Jacket Loose Tube, (Aerial) Outdoor Fiber Optic Cable, Installed On Poles	9,116.35	3,119.37
			For Corrugated Coated Steel Tape Armored Cable, Add	*183.37*	
27 15 23 00-0529	MLF		4-Fiber, Singlemode, Single Jacket Loose Tube, (Aerial) Outdoor Fiber Optic Cable, Installed On Poles	9,150.26	3,119.37
			For Corrugated Coated Steel Tape Armored Cable, Add	*188.12*	
27 15 23 00-0530	MLF		6-Fiber, Singlemode, Single Jacket Loose Tube, (Aerial) Outdoor Fiber Optic Cable, Installed On Poles	9,184.62	3,119.37
			For Corrugated Coated Steel Tape Armored Cable, Add	*192.74*	
27 15 23 00-0531	MLF		8-Fiber, Singlemode, Single Jacket Loose Tube, (Aerial) Outdoor Fiber Optic Cable, Installed On Poles	9,218.54	3,119.37
			For Corrugated Coated Steel Tape Armored Cable, Add	*189.05*	
27 15 23 00-0532	MLF		12-Fiber, Singlemode, Single Jacket Loose Tube, (Aerial) Outdoor Fiber Optic Cable, Installed On Poles	9,286.40	3,119.37
			For Corrugated Coated Steel Tape Armored Cable, Add	*220.40*	
27 15 23 00-0533	MLF		18-Fiber, Singlemode, Single Jacket Loose Tube, (Aerial) Outdoor Fiber Optic Cable, Installed On Poles	9,420.40	3,119.37
			For Corrugated Coated Steel Tape Armored Cable, Add	*229.13*	
27 15 23 00-0534	MLF		24-Fiber, Singlemode, Single Jacket Loose Tube, (Aerial) Outdoor Fiber Optic Cable, Installed On Poles	9,522.59	3,119.37
			For Corrugated Coated Steel Tape Armored Cable, Add	*253.25*	
27 15 23 00-0535	MLF		36-Fiber, Singlemode, Single Jacket Loose Tube, (Aerial) Outdoor Fiber Optic Cable, Installed On Poles	9,765.57	3,119.37
			For Corrugated Coated Steel Tape Armored Cable, Add	*242.83*	
27 15 23 00-0536	MLF		48-Fiber, Singlemode, Single Jacket Loose Tube, (Aerial) Outdoor Fiber Optic Cable, Installed On Poles	9,978.05	3,119.37
			For Corrugated Coated Steel Tape Armored Cable, Add	*282.11*	
27 15 23 00-0537	MLF		60-Fiber, Singlemode, Single Jacket Loose Tube, (Aerial) Outdoor Fiber Optic Cable, Installed On Poles	10,153.71	3,119.37
			For Corrugated Coated Steel Tape Armored Cable, Add	*270.52*	
27 15 23 00-0538	MLF		72-Fiber, Singlemode, Single Jacket Loose Tube, (Aerial) Outdoor Fiber Optic Cable, Installed On Poles	10,372.83	3,119.37
			For Corrugated Coated Steel Tape Armored Cable, Add	*309.29*	
27 15 23 00-0539	MLF		96-Fiber, Singlemode, Single Jacket Loose Tube, (Aerial) Outdoor Fiber Optic Cable, Installed On Poles	10,947.93	3,119.37
			For Corrugated Coated Steel Tape Armored Cable, Add	*314.13*	
27 15 23 00-0540	MLF		120-Fiber, Singlemode, Single Jacket Loose Tube, (Aerial) Outdoor Fiber Optic Cable, Installed On Poles	11,564.94	3,119.37
			For Corrugated Coated Steel Tape Armored Cable, Add	*374.84*	
27 15 23 00-0541	MLF		144-Fiber, Singlemode, Single Jacket Loose Tube, (Aerial) Outdoor Fiber Optic Cable, Installed On Poles	11,712.86	3,119.37
			For Corrugated Coated Steel Tape Armored Cable, Add	*402.49*	
27 15 23 00-0542			Hybrid, Indoor/Outdoor Fiber Optic Cable, Installed In Conduit *(27 15 23 00-0338)*		
			Note: Singlemode and multimode combination cable. Excludes conduit or innerduct.		
27 15 23 00-0543			Riser Rated, Hybrid, Indoor/Outdoor Fiber Optic Cable, Installed In Conduit *(27 15 23 00-0542)*		
27 15 23 00-0544	MLF		12-Fiber, 6 Singlemode/6 Multimode, Riser Rated, Hybrid, Indoor/Outdoor Fiber Optic Cable, Installed In Conduit	3,722.70	676.80
27 15 23 00-0545	MLF		24-Fiber, 12 Singlemode/12 Multimode, Riser Rated, Hybrid, Indoor/Outdoor Fiber Optic Cable, Installed In Conduit	4,715.60	676.80
27 15 23 00-0546	MLF		48-Fiber, 24 Singlemode/24 Multimode, Riser Rated, Hybrid, Indoor/Outdoor Fiber Optic Cable, Installed In Conduit	6,927.45	676.80
27 15 23 00-0547			Plenum Rated, Hybrid, Indoor/Outdoor Fiber Optic Cable, Installed In Conduit *(27 15 23 00-0542)*		
27 15 23 00-0548	MLF		12-Fiber, 6 Singlemode/6 Multimode, Plenum Rated, Hybrid, Indoor/Outdoor Fiber Optic Cable, Installed In Conduit	4,989.10	676.80
27 15 23 00-0549	MLF		24-Fiber, 12 Singlemode/12 Multimode, Plenum Rated, Hybrid, Indoor/Outdoor Fiber Optic Cable, Installed In Conduit	5,553.36	676.80
27 15 23 00-0550	MLF		48-Fiber, 24 Singlemode/24 Multimode, Plenum Rated, Hybrid, Indoor/Outdoor Fiber Optic Cable, Installed In Conduit	8,021.56	676.80
27 15 23 00-0551			Hybrid, Indoor/Outdoor Fiber Optic Cable, Buried In Trench *(27 15 23 00-0338)*		
			Note: Singlemode and multimode combination cable. Excludes trenching.		
27 15 23 00-0552			Riser Rated, Hybrid, Indoor/Outdoor Fiber Optic Cable, Buried In Trench *(27 15 23 00-0551)*		
27 15 23 00-0553	MLF		12-Fiber, 6 Singlemode/6 Multimode, Riser Rated, Hybrid, Indoor/Outdoor Fiber Optic Cable, Buried In Trench	3,609.89	620.41
27 15 23 00-0554	MLF		24-Fiber, 12 Singlemode/12 Multimode, Riser Rated, Hybrid, Indoor/Outdoor Fiber Optic Cable, Buried In Trench	4,602.79	620.41
27 15 23 00-0555	MLF		48-Fiber, 24 Singlemode/24 Multimode, Riser Rated, Hybrid, Indoor/Outdoor Fiber Optic Cable, Buried In Trench	6,814.64	620.41
27 15 23 00-0556			Plenum Rated, Hybrid, Indoor/Outdoor Fiber Optic Cable, Buried In Trench *(27 15 23 00-0551)*		
27 15 23 00-0557	MLF		12-Fiber, 6 Singlemode/6 Multimode, Plenum Rated, Hybrid, Indoor/Outdoor Fiber Optic Cable, Buried In Trench	4,876.29	620.41
27 15 23 00-0558	MLF		24-Fiber, 12 Singlemode/12 Multimode, Plenum Rated, Hybrid, Indoor/Outdoor Fiber Optic Cable, Buried In Trench	5,440.55	620.41
27 15 23 00-0559	MLF		48-Fiber, 24 Singlemode/24 Multimode, Plenum Rated, Hybrid, Indoor/Outdoor Fiber Optic Cable, Buried In Trench	7,908.75	620.41

27 15 33 Communications Coaxial Horizontal Cabling *(27 15)*

Note: Cable installed in conduit includes pull wires and installation in conduit, innerduct, wiremold, etc. Cable installed exposed includes installation on exposed surfaces, uncovered wireways, cable trays, etc.

27 15 33 00-0001 Indoor Coaxial Cable *(27 15 33)*

27 15 33 00-0002 Coaxial Distribution Cable *(27 15 33 00-0001)*

Note: Cables shall be as Belden, Times Fiber, West Penn or approved equal. For tasks installed in conduit, tasks exclude conduit.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 33 00-0003	MLF	RG-6/U Coaxial Distribution Cable, Installed In Conduit	3,133.41	329.76
27 15 33 00-0004	MLF	RG-6A/U Coaxial Distribution Cable, Installed In Conduit	12,734.99	329.76
27 15 33 00-0005	MLF	RG-8/U Coaxial Distribution Cable, Installed In Conduit	6,485.75	348.31
27 15 33 00-0006	MLF	RG-8A/U Coaxial Distribution Cable, Installed In Conduit	8,289.34	348.31
27 15 33 00-0007	MLF	RG-11/U Coaxial Distribution Cable, Installed In Conduit	7,241.12	412.21
27 15 33 00-0008	MLF	RG-11A/U Coaxial Distribution Cable, Installed In Conduit	10,729.12	412.21
27 15 33 00-0009	MLF	RG-11/U Coaxial Distribution Cable, Plenum Rated, Installed Exposed	23,611.52	577.09
27 15 33 00-0010	MLF	RG-58/U Coaxial Distribution Cable, Installed In Conduit	2,252.69	288.55
27 15 33 00-0011	MLF	RG-58A/U Coaxial Distribution Cable, Installed In Conduit	2,610.08	288.55
27 15 33 00-0012	MLF	RG-58C/U Coaxial Distribution Cable, Installed In Conduit	3,239.65	288.55
27 15 33 00-0013	MLF	RG-58/U Coaxial Distribution Cable, Plenum Rated, Installed Exposed	8,073.28	577.09
27 15 33 00-0014	MLF	RG-59/U Coaxial Distribution Cable, Installed In Conduit	3,922.40	288.55
27 15 33 00-0015	MLF	RG-59/U Coaxial Distribution Cable, Plenum Rated, Installed Exposed	9,946.50	577.09
27 15 33 00-0016	MLF	1/2" Hard Line Coaxial, Installed In Conduit	3,065.76	412.21

27 15 33 00-0017 Coaxial, Indoor Telecommunications Cable *(27 15 33 00-0001)*

27 15 33 00-0018 Coaxial, Indoor Telecommunications Cable, Installed In Conduit *(27 15 33 00-0017)*

27 15 33 00-0019	MLF	RG 59/U Coaxial, Indoor Telecommunications Cable, Installed In Conduit (Belden 9108)	1,790.31	473.77
27 15 33 00-0020	MLF	RG 59/U Plenum Coaxial, Indoor Telecommunications Cable, Installed In Conduit (Belden 82108)	4,644.63	473.77
27 15 33 00-0021	MLF	RG 6/U Coaxial, Indoor Telecommunications Cable, Installed In Conduit (Belden 9114)	1,384.29	541.44
27 15 33 00-0022	MLF	RG 6/U Plenum Coaxial, Indoor Telecommunications Cable, Installed In Conduit (Belden 82120)	5,881.82	541.44

27 15 33 00-0023 Coaxial, Indoor Telecommunications Cable, Installed Exposed *(27 15 33 00-0017)*

27 15 33 00-0024	MLF	RG 59/U Coaxial, Indoor Telecommunications Cable, Installed Exposed (Belden 9108)	2,579.91	947.52
		For Work In Restricted Working Space, Add	*473.76*	
27 15 33 00-0025	MLF	RG 59/U Plenum Coaxial, Indoor Telecommunications Cable, Installed Exposed (Belden 82108)	5,434.23	947.52
		For Work In Restricted Working Space, Add	*473.76*	
27 15 33 00-0026	MLF	RG 6/U Coaxial, Indoor Telecommunications Cable, Installed Exposed (Belden 9114)	2,286.69	1,082.89
		For Work In Restricted Working Space, Add	*541.44*	
27 15 33 00-0027	MLF	RG 6/U Plenum Coaxial, Indoor Telecommunications Cable, Installed Exposed (Belden 82120)	6,784.22	1,082.89
		For Work In Restricted Working Space, Add	*541.44*	

27 15 33 00-0028 Outdoor Coaxial Cable *(27 15 33)*

27 15 33 00-0029 Coaxial Cables "Television" Copper Covered Aluminum Center Core *(27 15 33 00-0028)*

Note: Corrugated steel armor jacket.

27 15 33 00-0030	MLF	TV Coaxial Trunk Cable 3/4" Diameter, Direct Burial	7,831.22	1,542.89
27 15 33 00-0031	MLF	TV Coaxial Distribution Cable 1/2" Diameter, Direct Burial	4,751.65	1,085.24
27 15 33 00-0032	MLF	TV Coaxial Distribution Cable 3/8" Diameter, Direct Burial	4,471.62	640.26
27 15 33 00-0033	MLF	TV Coaxial Cable Drop 1/4" Diameter, Direct Burial	1,968.12	640.26
27 15 33 00-0034	MLF	1/4" Diameter, TV Coaxial Cable Drop, Installed In Conduit	2,868.53	1,000.42

27 15 43 Communications Faceplates and Connectors *(27 15)*

27 15 43 00-0001 Wall Mounted Telephone Faceplates *(27 15 43)*

Note: Includes standard telephone mounting studs.

27 15 43 00-0002 Plastic Faceplates For Wall Mounted Telephones *(27 15 43 00-0001)*

27 15 43 00-0003	EA	Single Gang, 6-Position RJ25 Jack, Flush, Plastic Faceplate For Wall Mounted Telephones	37.38	14.10

27 15 43 00-0004 Stainless Steel Faceplates For Wall Mounted Telephones *(27 15 43 00-0001)*

27 15 43 00-0005	EA	Single Gang, Keystone Opening, Flush, Stainless Steel Faceplate For Wall Mounted Telephones Note: Requires one snap-in modular jack.	39.06	5.64
27 15 43 00-0006	EA	Single Gang, 6-Position RJ25 Jack, Flush, Stainless Steel Faceplate For Wall Mounted Telephones	65.71	14.10
27 15 43 00-0007	EA	Single Gang, 8-Position RJ45 Jack, Flush, Stainless Steel Faceplate For Wall Mounted Telephones	76.22	16.92
27 15 43 00-0008	EA	Single Gang, Keystone Opening, Recessed, Stainless Steel Faceplate For Wall Mounted Telephones Note: Requires one snap-in modular jack.	37.43	5.64
27 15 43 00-0009	EA	Single Gang, 6-Position RJ25 Jack, Recessed, Stainless Steel Faceplate For Wall Mounted Telephones	58.86	14.10
27 15 43 00-0010	EA	Single Gang, 8-Position RJ45 Jack, Recessed, Stainless Steel Faceplate For Wall Mounted Telephones	69.55	16.92

27 15 43 00-0011 Plastic Communications Faceplates *(27 15 43)*

Note: Excludes modular jacks. See CSI section 27 15 43 00-0046 for modular jacks.

27 15 43 00-0012	EA	One Port, Single Gang, Plastic Communication Faceplate With Station ID	10.11	2.82
27 15 43 00-0013	EA	Two Port, Single Gang, Plastic Communication Faceplate With Station ID	10.11	2.82
27 15 43 00-0014	EA	Three Port, Single Gang, Plastic Communication Faceplate With Station ID	10.11	2.82
27 15 43 00-0015	EA	Four Port, Single Gang, Plastic Communication Faceplate With Station ID	10.11	2.82
27 15 43 00-0016	EA	Six Port, Single Gang, Plastic Communication Faceplate With Station ID	10.11	2.82
27 15 43 00-0017	EA	Four Port, Double Gang, Plastic Communications Faceplate With Station ID	17.24	2.82
27 15 43 00-0018	EA	Six Port, Double Gang, Plastic Communication Faceplate With Station ID	17.24	2.82
27 15 43 00-0019	EA	Eight Port, Double Gang, Plastic Communication Faceplate With Station ID	17.24	2.82
27 15 43 00-0020	EA	Nine Port, Double Gang, Plastic Communication Faceplate With Station ID	17.24	2.82
27 15 43 00-0021	EA	Twelve Port, Double Gang, Plastic Communication Faceplate With Station ID	17.24	2.82
27 15 43 00-0022	EA	Two Port, Modular Furniture, Plastic Communication Faceplate With Station ID	17.27	5.65

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 43 00-0023		**Stainless Steel Communications Faceplates** *(27 15 43)*		
		Note: Excludes modular jacks. See CSI section 27 15 43 00-0046 for modular jacks.		
27 15 43 00-0024		**Stainless Steel Communications Faceplates** *(27 15 43 00-0023)*		
27 15 43 00-0025	EA	One Port, Single Gang, Stainless Steel Communications Faceplate	20.93	2.82
27 15 43 00-0026	EA	Two Port, Single Gang, Stainless Steel Communications Faceplate	20.93	2.82
27 15 43 00-0027	EA	Three Port, Single Gang, Stainless Steel Communications Faceplate	20.93	2.82
27 15 43 00-0028	EA	Four Port, Single Gang, Stainless Steel Communications Faceplate	22.51	2.82
27 15 43 00-0029	EA	Six Port, Single Gang, Stainless Steel Communications Faceplate	22.51	2.82
27 15 43 00-0030	EA	Four Port, Double Gang, Stainless Steel Communications Faceplate	31.04	2.82
27 15 43 00-0031	EA	Six Port, Double Gang, Stainless Steel Communications Faceplate	32.04	2.82
27 15 43 00-0032	EA	Eight Port, Double Gang, Stainless Steel Communications Faceplate	37.39	2.82
27 15 43 00-0033	EA	Nine Port, Double Gang, Stainless Steel Communication Faceplate	37.39	2.82
27 15 43 00-0034	EA	Twelve Port, Double Gang, Stainless Steel Communications Faceplate	37.39	2.82
27 15 43 00-0035		**Stainless Steel Communications Faceplates With Station ID** *(27 15 43 00-0023)*		
27 15 43 00-0036	EA	One Port, Single Gang, Stainless Steel Communications Faceplate With Station ID	30.85	2.82
27 15 43 00-0037	EA	Two Port, Single Gang, Stainless Steel Communications Faceplate With Station ID	30.85	2.82
27 15 43 00-0038	EA	Three Port, Single Gang, Stainless Steel Communications Faceplate With Station ID	30.85	2.82
27 15 43 00-0039	EA	Four Port, Single Gang, Stainless Steel Communications Faceplate With Station ID	30.85	2.82
27 15 43 00-0040	EA	Six Port, Single Gang, Stainless Steel Communications Faceplate With Station ID	30.85	2.82
27 15 43 00-0041	EA	Four Port, Double Gang, Stainless Steel Communications Faceplate With Station ID	68.74	2.82
27 15 43 00-0042	EA	Six Port, Double Gang, Stainless Steel Communications Faceplate With Station ID	68.74	2.82
27 15 43 00-0043	EA	Eight Port, Double Gang, Stainless Steel Communications Faceplate With Station ID	68.74	2.82
27 15 43 00-0044	EA	Nine Port, Double Gang, Stainless Steel Communication Faceplate With Station ID	68.74	2.82
27 15 43 00-0045	EA	Twelve Port, Double Gang, Stainless Steel Communications Faceplate With Station ID	68.74	2.82
27 15 43 00-0046		**Snap-In Modular Jacks** *(27 15 43)*		
		Note: Includes termination.		
27 15 43 00-0047	EA	Cat 3, Snap-In Modular Jack	33.91	11.30
27 15 43 00-0048	EA	Category 5E, Snap-In Modular Jack	36.09	11.30
27 15 43 00-0049	EA	Category 5E Shielded, Snap-In Modular Jack	42.64	11.30
27 15 43 00-0050	EA	Cat 6, Snap-In Modular Jack	42.64	11.30
27 15 43 00-0051	EA	Cat 6 Shielded, Snap-In Modular Jack	49.98	11.30
27 15 43 00-0052	EA	Cat 6A, Snap-In Modular Jack	51.09	11.30
27 15 43 00-0053	EA	Voice, RJ-11, Snap-In Modular Jack	24.59	5.65
27 15 43 00-0054	EA	SC Type Fiber Optic, Snap-In Modular Jack	38.87	11.30
27 15 43 00-0055	EA	ST Type Fiber Optic, Snap-In Modular Jack	44.42	11.30
27 15 43 00-0056	EA	LC Type Fiber Optic, Snap-In Modular Jack	55.34	11.30
27 15 43 00-0057	EA	Blank Fill In, Snap-In Modular Jack	6.68	2.82
27 15 43 00-0058	EA	Open Cable Pass Through Insert, Snap-In Modular Jack	7.99	2.82
27 15 43 00-0059	EA	Coaxial F-Type Coupler, Snap-In Modular Jack	29.05	8.48
		Note: Includes female to female connection.		
		For Gold Bulkhead, Add	*2.12*	
27 15 43 00-0060	EA	RCA Jack Pass-Through Coupler, Snap-In Modular Jack	29.45	8.48
		Note: Includes female to female connection.		
27 15 43 00-0061	EA	RCA Solder Coupler, Snap-In Modular Jack	54.52	11.30
27 15 43 00-0062	EA	RCA Jack With 110 Punch Down, Snap-In Modular Jack	70.59	11.30
27 15 43 00-0063	EA	3.5 m Mini Stereo Jack, Snap-In Modular Jack	35.50	11.30
27 15 43 00-0064	EA	MT-RJ Pass-Through Coupler, Snap-In Modular Jack	42.01	5.65
27 15 43 00-0065	EA	BNC Connector, Snap-In Modular Jack	42.04	11.30
27 15 43 00-0066	EA	S-Video With 110 Punch Down, Snap-In Modular Jack	47.99	11.30
27 15 43 00-0067	PR	Speaker Connectors, Snap-In Modular Jack	62.15	16.95
		Note: Includes a pair of binding posts, banana jacks or spring clip connectors. Requires two open ports.		
27 15 43 00-0068	EA	USB Audio Video Connector, Snap-In Modular Jack	75.37	11.30
27 15 43 00-0069		**Surface Mount Plastic Communication Boxes** *(27 15 43)*		
		Note: Excludes modular jacks. See CSI section 27 15 43 00-0046 for modular jacks.		
27 15 43 00-0070	EA	One Port, Surface Mount Plastic Communication Box With Station ID	33.90	14.13
27 15 43 00-0071	EA	Two Port, Surface Mount Plastic Communication Box With Station ID	34.90	14.13
27 15 43 00-0072	EA	Four Port, Surface Mount Plastic Communication Box With Station ID	41.74	14.13
27 15 43 00-0073	EA	Six Port, Surface Mount Plastic Communication Box With Station ID	49.88	14.13
27 15 43 00-0074	EA	Twelve Port, Surface Mount Plastic Communication Box With Station ID	58.41	14.13
27 15 53		**Communications Cable Innerduct** *(27 15)*		
		Note: Cable installed in conduit includes pull wires and installation in conduit, innerduct, wiremold, etc. Cable installed exposed includes installation on exposed surfaces, uncovered wireways, cable trays, etc.		
27 15 53 00-0001		**Indoor Innerduct** *(27 15 53)*		
27 15 53 00-0002		**Indoor Innerduct, Installed In Conduit** *(27 15 53 00-0001)*		
27 15 53 00-0003		**Riser Rated, Indoor Innerduct, Installed In Conduit** *(27 15 53 00-0002)*		
27 15 53 00-0004	MLF	1" Riser Rated, Indoor Innerduct, Installed In Conduit	4,649.44	1,692.00
27 15 53 00-0005	MLF	1-1/4" Riser Rated, Indoor Innerduct, Installed In Conduit	5,992.83	2,256.01
27 15 53 00-0006	MLF	1-1/2" Riser Rated, Indoor Innerduct, Installed In Conduit	8,036.25	2,820.01
27 15 53 00-0007	MLF	2" Riser Rated, Indoor Innerduct, Installed In Conduit	9,352.71	3,384.02

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 15 53 00-0008		Plenum Rated, Indoor Innerduct, Installed In Conduit *(27 15 53 00-0002)*		
27 15 53 00-0009	MLF	3/4" Plenum Rated, Indoor Innerduct, Installed In Conduit	7,256.38	1,128.00
27 15 53 00-0010	MLF	1" Plenum Rated, Indoor Innerduct, Installed In Conduit	8,109.78	1,692.00
27 15 53 00-0011	MLF	1-1/4" Plenum Rated, Indoor Innerduct, Installed In Conduit	10,203.04	2,256.01
27 15 53 00-0012	MLF	1-1/2" Plenum Rated, Indoor Innerduct, Installed In Conduit	13,140.91	2,820.01
27 15 53 00-0013	MLF	2" Plenum Rated, Indoor Innerduct, Installed In Conduit	15,817.35	3,384.02
27 15 53 00-0014		Indoor Innerduct, Installed Exposed *(27 15 53 00-0001)*		
27 15 53 00-0015		Riser Rated, Indoor Innerduct, Installed Exposed *(27 15 53 00-0014)*		
27 15 53 00-0016	MLF	1" Riser Rated, Indoor Innerduct, Installed Exposed	5,777.44	2,256.01
		For Work In Restricted Working Space, Add	*1,353.61*	
27 15 53 00-0017	MLF	1-1/4" Riser Rated, Indoor Innerduct, Installed Exposed	7,120.84	2,820.01
		For Work In Restricted Working Space, Add	*1,692.01*	
27 15 53 00-0018	MLF	1-1/2" Riser Rated, Indoor Innerduct, Installed Exposed	9,164.25	3,384.02
		For Work In Restricted Working Space, Add	*2,030.41*	
27 15 53 00-0019	MLF	2" Riser Rated, Indoor Innerduct, Installed Exposed	10,480.71	3,948.02
		For Work In Restricted Working Space, Add	*2,368.81*	
27 15 53 00-0020		Plenum Rated, Indoor Innerduct, Installed Exposed *(27 15 53 00-0014)*		
27 15 53 00-0021	MLF	3/4" Plenum Rated, Indoor Innerduct, Installed Exposed	8,384.38	1,692.00
27 15 53 00-0022	MLF	1" Plenum Rated, Indoor Innerduct, Installed Exposed	9,237.78	2,256.01
		For Work In Restricted Working Space, Add	*1,353.61*	
27 15 53 00-0023	MLF	1-1/4" Plenum Rated, Indoor Innerduct, Installed Exposed	11,331.05	2,820.01
		For Work In Restricted Working Space, Add	*1,692.01*	
27 15 53 00-0024	MLF	1-1/2" Plenum Rated, Indoor Innerduct, Installed Exposed	14,268.91	3,384.02
		For Work In Restricted Working Space, Add	*2,030.41*	
27 15 53 00-0025	MLF	2" Plenum Rated, Indoor Innerduct, Installed Exposed	16,945.35	3,948.02
		For Work In Restricted Working Space, Add	*2,368.81*	
27 15 53 00-0026		Outdoor Innerduct *(27 15 53)*		
27 15 53 00-0027		Outdoor Innerduct, Installed In Conduit *(27 15 53 00-0026)*		
27 15 53 00-0028	MLF	1" Outdoor Innerduct, Installed In Conduit	4,326.35	1,692.00
27 15 53 00-0029	MLF	1-1/4" Outdoor Innerduct, Installed In Conduit	5,516.39	2,256.01
27 15 53 00-0030	MLF	1-1/2" Outdoor Innerduct, Installed In Conduit	7,072.91	2,820.01
27 15 53 00-0031	MLF	2" Outdoor Innerduct, Installed In Conduit	8,441.07	3,384.02
27 15 53 00-0032		Outdoor Innerduct, Buried In Trench *(27 15 53 00-0026)*		
27 15 53 00-0033	MLF	1" Outdoor Innerduct, Buried In Trench	3,198.34	
27 15 53 00-0034	MLF	1-1/4" Outdoor Innerduct, Buried In Trench	4,388.39	
27 15 53 00-0035	MLF	1-1/2" Outdoor Innerduct, Buried In Trench	5,944.90	
27 15 53 00-0036	MLF	2" Outdoor Innerduct, Buried In Trench	7,313.07	

27 16 Communications Connecting Cords, Devices, and Adapters *(27 10)*

27 16 16 Communications Media Converters, Adapters, and Transceivers *(27 16)*

27 16 16 00-0001		Fiber Optic Receivers *(27 16 16)*		
27 16 16 00-0002	EA	Fiber Optic Receiver, Range 6.2 Miles	1,564.44	56.40
27 16 16 00-0003	EA	Fiber Optic MM Dual Video Receiver, Manual Gain	1,160.32	111.09
		Note: With video presence Ind, RM.		
27 16 16 00-0004		Fiber Optic Transmitters *(27 16 16)*		
27 16 16 00-0005	EA	Fiber Optic Transmitter, Range 6.2 Miles	1,564.42	56.40
27 16 16 00-0006	EA	Fiber Optic MM Dual Video Transmitter Video Presence Indicator	1,160.32	111.09
27 16 16 00-0007		Fiber Optic Repeaters *(27 16 16)*		
		Note: Consist of transmitter and receiver, back-to-back. Excludes power source.		
27 16 16 00-0008	EA	Fiber Optic Repeater, 6.2 Miles Transmitter And Receiver Back-Back, No Power	1,677.22	112.80
27 16 16 00-0009	EA	Fiber Optic Digital Repeater, 2,000 Miles Transmitter And Receiver Back-Back, No Power	2,544.76	225.60
27 16 16 00-0010		Fiber Optic Transceivers *(27 16 16)*		
27 16 16 00-0011	EA	Fiber Optic Transceivers, 3,000 Miles Range	1,560.08	225.60
27 16 16 00-0012	EA	Fiber Optic Transceivers, Digital 2,000 Miles Range	1,560.08	225.60
27 16 16 00-0013	EA	Fiber Optic Ethernet Transceiver	2,085.22	338.40
27 16 16 00-0014	EA	Transceiver (Low Cost Bi- Directional)	836.47	84.60

27 16 19 Communications Patch Cords, Station Cords, and Cross Connect Wire *(27 16)*

27 16 19 00-0001 Fiber Optic Patch Cords *(27 16 19)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 16 19 00-0002		**Simplex Fiber Optic Patch Cables** *(27 16 19 00-0001)*		
27 16 19 00-0003		**Singlemode, Simplex Fiber Optic Patch Cables** *(27 16 19 00-0002)*		
27 16 19 00-0004	EA	ST To ST Connectors, 1 Meter Length, Singlemode, Simplex Fiber Optic Patch Cable	57.46	
		For Each Additional Meter In Length, Add	*0.26*	
27 16 19 00-0005	EA	ST To SC Connectors, 1 Meter Length, Singlemode, Simplex Fiber Optic Patch Cable	46.30	
		For Each Additional Meter In Length, Add	*0.26*	
27 16 19 00-0006	EA	ST To LC Connectors, 1 Meter Length, Singlemode, Simplex Fiber Optic Patch Cable	60.80	
		For Each Additional Meter In Length, Add	*0.26*	
27 16 19 00-0007	EA	SC To SC Connectors, 1 Meter Length, Singlemode, Simplex Fiber Optic Patch Cable	48.85	
		For Each Additional Meter In Length, Add	*0.26*	
27 16 19 00-0008	EA	SC To LC Connectors, 1 Meter Length, Singlemode, Simplex Fiber Optic Patch Cable	56.99	
		For Each Additional Meter In Length, Add	*0.26*	
27 16 19 00-0009	EA	LC To LC Connectors, 1 Meter Length, Singlemode, Simplex Fiber Optic Patch Cable	56.09	
		For Each Additional Meter In Length, Add	*0.26*	
27 16 19 00-0010		**Duplex Fiber Optic Patch Cables** *(27 16 19 00-0001)*		
27 16 19 00-0011		**Singlemode, Duplex Fiber Optic Patch Cables** *(27 16 19 00-0010)*		
27 16 19 00-0012	EA	ST To ST Connectors, 1 Meter Length, Singlemode, Duplex Fiber Optic Patch Cable	102.29	
		For Each Additional Meter In Length, Add	*0.51*	
27 16 19 00-0013	EA	ST To SC Connectors, 1 Meter Length, Singlemode, Duplex Fiber Optic Patch Cable	99.15	
		For Each Additional Meter In Length, Add	*0.51*	
27 16 19 00-0014	EA	ST To LC Connectors, 1 Meter Length, Singlemode, Duplex Fiber Optic Patch Cable	110.33	
		For Each Additional Meter In Length, Add	*0.51*	
27 16 19 00-0015	EA	SC To SC Connectors, 1 Meter Length, Singlemode, Duplex Fiber Optic Patch Cable	85.11	
		For Each Additional Meter In Length, Add	*0.51*	
27 16 19 00-0016	EA	SC To LC Connectors, 1 Meter Length, Singlemode, Duplex Fiber Optic Patch Cable	101.36	
		For Each Additional Meter In Length, Add	*0.51*	
27 16 19 00-0017	EA	LC To LC Connectors, 1 Meter Length, Singlemode, Duplex Fiber Optic Patch Cable	99.59	
		For Each Additional Meter In Length, Add	*0.51*	
27 16 19 00-0018		**Multimode, Duplex Fiber Optic Patch Cables** *(27 16 19 00-0010)*		
27 16 19 00-0019	EA	ST To ST Connectors, 1 Meter Length, Multimode, Duplex Fiber Optic Patch Cable	76.51	
		For Each Additional Meter In Length, Add	*1.48*	
27 16 19 00-0020	EA	ST To SC Connectors, 1 Meter Length, Multimode, Duplex Fiber Optic Patch Cable	83.80	
		For Each Additional Meter In Length, Add	*1.48*	
27 16 19 00-0021	EA	ST To MTRJ Connectors, 1 Meter Length, Multimode, Duplex Fiber Optic Patch Cable	84.55	
		For Each Additional Meter In Length, Add	*1.48*	
27 16 19 00-0022	EA	ST To LC Connectors, 1 Meter Length, Multimode, Duplex Fiber Optic Patch Cable	86.89	
		For Each Additional Meter In Length, Add	*1.48*	
27 16 19 00-0023	EA	SC To SC Connectors, 1 Meter Length, Multimode, Duplex Fiber Optic Patch Cable	76.82	
		For Each Additional Meter In Length, Add	*1.48*	
27 16 19 00-0024	EA	SC To MTRJ Connectors, 1 Meter Length, Multimode, Duplex Fiber Optic Patch Cable	87.30	
		For Each Additional Meter In Length, Add	*1.48*	
27 16 19 00-0025	EA	SC To LC Connectors, 1 Meter Length, Multimode, Duplex Fiber Optic Patch Cable	103.12	
		For Each Additional Meter In Length, Add	*1.48*	
27 16 19 00-0026	EA	MTRJ To MTRJ Connectors, 1 Meter Length, Multimode, Duplex Fiber Optic Patch Cable	70.10	
		For Each Additional Meter In Length, Add	*1.48*	
27 16 19 00-0027	EA	LC To LC Connectors, 1 Meter Length, Multimode, Duplex Fiber Optic Patch Cable	85.94	
		For Each Additional Meter In Length, Add	*1.48*	
27 16 19 00-0028		**Fiber Optic Cable Pig Tail** *(27 16 19)*		
27 16 19 00-0029	EA	Simplex Fiber Optic Cable Pig Tail	81.97	39.48
27 16 19 00-0030	EA	Duplex Fiber Optic Cable Pig Tail	108.42	39.48
27 16 19 00-0031		**Ethernet Patch Cords** *(27 16 19)*		
27 16 19 00-0032	EA	3' Category 5E Patch Cables With Boots	15.92	
27 16 19 00-0033	EA	5' Category 5E Patch Cables With Boots	17.44	
27 16 19 00-0034	EA	7' Category 5E Patch Cables With Boots	18.97	
27 16 19 00-0035	EA	10' Category 5E Patch Cables With Boots	27.58	
27 16 19 00-0036	EA	15' Category 5E Patch Cables With Boots	34.54	
27 16 19 00-0037	EA	25' Category 5E Patch Cables With Boots	46.13	
27 16 19 00-0038	EA	3' Category 6 Patch Cables With Boots	17.73	
27 16 19 00-0039	EA	5' Category 6 Patch Cables With Boots	21.59	
27 16 19 00-0040	EA	7' Category 6 Patch Cables With Boots	21.66	
27 16 19 00-0041	EA	10' Category 6 Patch Cables With Boots	25.74	
27 16 19 00-0042	EA	15' Category 6 Patch Cables With Boots	33.96	
27 16 19 00-0043	EA	25' Category 6 Patch Cables With Boots	42.99	
27 16 19 00-0044	EA	50' Category 6 Patch Cables With Boots	68.41	
27 16 19 00-0045	EA	100' Category 6 Patch Cables With Boots	119.68	
27 16 19 00-0046	EA	3' Category 6A Patch Cables With Boots	21.39	
27 16 19 00-0047	EA	5' Category 6A Patch Cables With Boots	22.69	
27 16 19 00-0048	EA	7' Category 6A Patch Cables With Boots	23.66	
27 16 19 00-0049	EA	10' Category 6A Patch Cables With Boots	27.95	
27 16 19 00-0050	EA	15' Category 6A Patch Cables With Boots	34.32	
27 16 19 00-0051	EA	25' Category 6A Patch Cables With Boots	42.70	
27 16 19 00-0052	EA	50' Category 6A Patch Cables With Boots	61.51	

copyright 2026 The Gordian Group, Inc.

CSI	MINOR UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 16 19 00-0053	EA	100' Category 6A Patch Cables With Boots	107.64	
27 16 19 00-0054	EA	3' Category 5E Patch Cables With Plastic Arch	15.92	
27 16 19 00-0055	EA	5' Category 5E Patch Cables With Plastic Arch	17.44	
27 16 19 00-0056	EA	7' Category 5E Patch Cables With Plastic Arch	18.97	
27 16 19 00-0057	EA	10' Category 5E Patch Cables With Plastic Arch	27.58	
27 16 19 00-0058	EA	15' Category 5E Patch Cables With Plastic Arch	34.54	
27 16 19 00-0059	EA	25' Category 5E Patch Cables With Plastic Arch	46.13	
27 16 19 00-0060	EA	3' Category 6 Patch Cables With Plastic Arch	17.73	
27 16 19 00-0061	EA	5' Category 6 Patch Cables With Plastic Arch	21.59	
27 16 19 00-0062	EA	7' Category 6 Patch Cables With Plastic Arch	21.66	
27 16 19 00-0063	EA	10' Category 6 Patch Cables With Plastic Arch	25.74	
27 16 19 00-0064	EA	15' Category 6 Patch Cables With Plastic Arch	33.96	
27 16 19 00-0065	EA	25' Category 6 Patch Cables With Plastic Arch	42.99	
27 16 19 00-0066	EA	3' Category 6A Patch Cables With Plastic Arch	33.43	
27 16 19 00-0067	EA	5' Category 6A Patch Cables With Plastic Arch	35.73	
27 16 19 00-0068	EA	7' Category 6A Patch Cables With Plastic Arch	37.45	
27 16 19 00-0069	EA	10' Category 6A Patch Cables With Plastic Arch	42.85	
27 16 19 00-0070	EA	15' Category 6A Patch Cables With Plastic Arch	51.95	
27 16 19 00-0071	EA	25' Category 6A Patch Cables With Plastic Arch	66.75	
27 16 19 00-0072		Cross Connect Wire *(27 16 19)*		
		Note: Up to 20' length.		
27 16 19 00-0073	EA	2-Pair Cross Connect Wire	18.41	
27 16 19 00-0074	EA	3-Pair Cross Connect Wire	24.69	
27 16 19 00-0075	EA	4-Pair Cross Connect Wire	30.88	

27 20 Data Communications *(27)*

27 21 Data Communications Network Equipment *(27 20)*

Note: Includes testing of new devices and certification.

27 21 16 Data Communications Routers, CSU/DSU, Multiplexers, Codecs, and Modems *(27 21)*

27 21 16 00-0001		Fiber Optic Modems *(27 21 16)*		
27 21 16 00-0002	EA	Fiber Optic Modems, Range 6.2 Miles	2,870.57	225.60
27 21 16 00-0003	EA	Fiber Optic Modem, Range 3.1 Miles, 12 Channel	5,894.79	225.60
27 21 16 00-0004		Ethernet Hubs and Switches *(27 21 16)*		
27 21 16 00-0005	EA	16 Port Managed Hub With Fiberport And Standard Management	4,295.06	169.50
27 21 16 00-0006	EA	16 Port Unmanaged Hub	685.89	113.00
27 21 16 00-0007	EA	12 Port, Industrial Ethernet Switch (Cisco IE-4000-4GC4GP4G-E)	5,958.13	113.00
27 21 16 00-0008	EA	Power Supply (Cisco PWR-IE170W-PC-AC)	1,756.03	56.50
27 21 16 00-0009		Network Equipment *(27 21 16)*		
27 21 16 00-0010		Communications Entrance Protection *(27 21 16 00-0009)*		
27 21 16 00-0011	EA	100-Pair, 5 Pin Configuration, 110 Termination, Building Entrance Terminal With Cover (Porta 24100-110-M110C)	1,211.27	84.75
		Note: Excludes terminations.		
27 21 16 00-0012	EA	Solid State Protector Module With 4 OHM Heat Coils (CommScope 4C1S)	14.57	1.13
27 21 16 00-0013		Communications Cabinets, Racks, Frames And Enclosures *(27 21 16 00-0009)*		
27 21 16 00-0014	EA	19" Width x 36" Height x 24" Depth, Wall Mounted Telecommunications Enclosure (Chatsworth 11840-736)	1,478.02	84.75
		For Fan Kit (Chatsworth 12804-701), Add	*210.20*	
27 21 16 00-0015	EA	10 Outlet, 125 Volt, 20 Amperes, Telecommunications Cabinet Power Strip (Chatsworth 13239-757)	1,377.33	5.65
27 21 16 00-0016		Communications Termination Blocks And Patch Panels *(27 21 16 00-0009)*		
27 21 16 00-0017		Communications Termination Blocks *(27 21 16 00-0016)*		
27 21 16 00-0018	EA	4-Pair, 300-Pair Count, 110 Patch Panel System Terminal Block (CommScope 107058810)	327.00	16.92
27 21 16 00-0019	EA	5-Pair, 300-Pair Count, 110 Patch Panel System Terminal Block (CommScope 107058802)	304.31	16.92
27 21 16 00-0020	EA	4-Pair, 900-Pair Count, 110 Patch Panel System Terminal Block (CommScope 107058869)	729.84	16.92
27 21 16 00-0021	EA	5-Pair, 900-Pair Count, 110 Patch Panel System Terminal Block (CommScope 107058851)	678.79	16.92
27 21 16 00-0022	EA	110 Connector System Mounting Brackets (CommScope 107535593)	102.30	16.92
27 21 16 00-0023	EA	110 Connector System Mounting Brackets (CommScope 107535585)	110.55	16.92
27 21 16 00-0024	EA	110 Connector System Mounting Brackets (CommScope 107098816)	125.99	16.92
27 21 16 00-0025		Communications Copper Patch Panels *(27 21 16 00-0016)*		
		Note: Excludes cabinet and terminations.		
27 21 16 00-0026	EA	24 Port, Category 5E Patch Panel (CommScope 108208919)	322.73	36.72
27 21 16 00-0027	EA	48 Port, Category 5E Patch Panel (CommScope 108208935)	588.95	45.20
27 21 16 00-0028	EA	24 Port, Category 6 Patch Panel (CommScope 760062372)	478.24	36.72
27 21 16 00-0029	EA	48 Port, Category 6 Patch Panel (CommScope 760062380)	893.52	45.20

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 21 16 00-0030		Communications Optical Fiber Patch Panels *(27 21 16 00-0016)*		
27 21 16 00-0031		Closet Connector Housings *(27 21 16 00-0030)*		
27 21 16 00-0032	EA	48 Fiber Total Capacity, Closet Connector Housing (Corning CCH-01U) Note: Accepts up to 2 closet connector housing panels. Excludes panels.	393.44	22.60
27 21 16 00-0033	EA	96 Fiber Total Capacity, Closet Connector Housing (Corning CCH-02U) Note: Accepts up to 4 closet connector housing panels. Excludes panels.	459.30	22.60
27 21 16 00-0034	EA	288 Fiber Total Capacity, Closet Connector Housing (Corning CCH-04U) Note: Accepts up to 12 closet connector housing panels. Excludes panels.	572.87	22.60
27 21 16 00-0035	EA	SC Duplex Multimode, 62.5 Micron, 12 Fiber, Closet Connector Housing Panel (Corning CCH-CP-91)	96.65	11.30
27 21 16 00-0036	EA	SC Duplex Singlemode, 12 Fiber, Closet Connector Housing Panel (Corning CCH-CP-59)	129.79	11.30
27 21 16 00-0037	EA	SC Simplex Multimode, 62.5 Micron, 12 Fiber, Closet Connector Housing Panel (Corning CCH-CP-56)	108.35	11.30
27 21 16 00-0038	EA	SC Simplex Singlemode, 12 Fiber, Closet Connector Housing Panel (Corning CCH-CP-3C)	140.49	11.30
27 21 16 00-0039		Communications Cable Management *(27 21 16 00-0009)*		
27 21 16 00-0040		Horizontal Communication Cable Management *(27 21 16 00-0039)*		
27 21 16 00-0041	EA	1.7" Height, 19" Width, 3.7" Depth, 1 RU, Front Only, Horizontal Cable Manager (Panduit WMPFSE)	162.60	22.60
27 21 16 00-0042	EA	3-1/2" Height, 19" Width, 3.7" Depth, Horizontal Cable Manager (Panduit WMPF1E)	168.69	22.60
27 21 16 00-0043		Vertical Communication Cable Management *(27 21 16 00-0039)*		
27 21 16 00-0044	EA	6" Width x 84" Height, Double-Sided Vertical Cabling Section (Chatsworth 11729-703)	1,036.49	56.50
27 21 16 00-0045	EA	19" Width x 84" Height, Universal Rack (Chatsworth 48353-703)	1,075.89	56.50
27 21 16 00-0046	EA	23" Width x 84" Height, Universal Rack (Chatsworth 48383-703)	1,164.50	56.50
27 21 16 00-0047		Communications Patch Cords, Station Cords, And Cross Connect Wire *(27 21 16 00-0009)*		
27 21 16 00-0048		Premise Cross-Connect Wire *(27 21 16 00-0047)*		
27 21 16 00-0049	LF	1-Pair, 22 AWG Premise Cross-Connect Wire (General Cable 7041973)	1.16	0.56
27 21 16 00-0050		Pathways For Communications Systems *(27 21 16 00-0009)*		
27 21 16 00-0051		Conduits And Back Boxes For Communication Systems *(27 21 16 00-0050)*		
27 21 16 00-0052		Flexible Conduit For Communication Systems *(27 21 16 00-0051)*		
27 21 16 00-0053	CLF	1" Diameter, Riser Rated, Non-Metallic Flexible Conduit With Pull Tape (Carlon DF4X1C)	533.20	203.04
27 21 16 00-0054	CLF	1" Diameter, Plenum Rated, Non-Metallic Flexible Conduit With Pull Tape (Carlon CF4X1C)	851.42	203.04
27 21 16 00-0055		Tube Cables For Communication Systems *(27 21 16 00-0051)*		
27 21 16 00-0056		Outdoor/All-Dielectric Tube Cables *(27 21 16 00-0055)*		
27 21 16 00-0057	CLF	Two Tube, Outdoor/All-Dielectric Tube Cable (Sumitomo TC02TOX)	366.76	135.36
27 21 16 00-0058	CLF	Seven Tube, Outdoor/All-Dielectric Tube Cable (Sumitomo TC07TOX)	538.53	169.20
27 21 16 00-0059	CLF	Nineteen Tube, Outdoor/All-Dielectric Tube Cable (Sumitomo TC19TOX)	874.53	203.04
27 21 16 00-0060		Indoor/Riser Rated Tube Cables *(27 21 16 00-0055)*		
27 21 16 00-0061	CLF	Two Tube, Indoor/Riser Rated Tube Cable (Sumitomo TC02TRX)	415.62	135.36
27 21 16 00-0062	CLF	Four Tube, Indoor/Riser Rated Tube Cable (Sumitomo TC04TRX)	504.90	152.28
27 21 16 00-0063	CLF	Seven Tube, Indoor/Riser Rated Tube Cable (Sumitomo TC07TRX)	572.46	169.20
27 21 16 00-0064	CLF	Nineteen Tube, Indoor/Riser Rated Tube Cable (Sumitomo TC19TRX)	1,027.90	203.04
27 21 16 00-0065		Indoor/Plenum Rated Tube Cables *(27 21 16 00-0055)*		
27 21 16 00-0066	CLF	Single Tube, Indoor/Plenum Rated Tube Cable (Sumitomo TC01TPX)	313.82	135.36
27 21 16 00-0067	CLF	Two Tube, Indoor/Plenum Rated Tube Cable (Sumitomo TC02TP2)	438.69	135.36
27 21 16 00-0068	CLF	Four Tube, Indoor/Plenum Rated Tube Cable (Sumitomo TC04TP2)	662.34	152.28
27 21 16 00-0069	CLF	Seven Tube, Indoor/Plenum Rated Tube Cable (Sumitomo TC07TP2)	951.14	169.20
27 21 16 00-0070	CLF	Nineteen Tube, Indoor/Plenum Rated Tube Cable (Sumitomo TC19TP2)	2,880.60	203.04
27 21 16 00-0071		Unjacketed Single Tube Cables *(27 21 16 00-0055)*		
27 21 16 00-0072	CLF	Single Tube, Unjacketed Single Tube Cable (Sumitomo TC01TGX)	275.82	135.36
27 21 16 00-0073		Multimode Fiber Bundles *(27 21 16 00-0055)* Note: Includes optical fiber cables.		
27 21 16 00-0074	CLF	2-Fiber, 62.5 Micron, Multimode Fiber Bundle (Sumitomo FR02M6)	113.83	40.61
27 21 16 00-0075	CLF	4-Fiber, 62.5 Micron, Multimode Fiber Bundle (Sumitomo FB04M6)	166.76	40.61
27 21 16 00-0076	CLF	6-Fiber, 62.5 Micron, Multimode Fiber Bundle (Sumitomo FB06M6)	223.77	40.61
27 21 16 00-0077	CLF	12-Fiber, 62.5 Micron, Multimode Fiber Bundle (Sumitomo FB12M6)	397.50	40.61
27 21 16 00-0078	CLF	18-Fiber, 62.5 Micron, Multimode Fiber Bundle (Sumitomo FB18M6)	573.01	47.37
27 21 16 00-0079	CLF	24-Fiber, 62.5 Micron, Multimode Fiber Bundle (Sumitomo FB24M6)	746.75	47.37

copyright 2026 The Gordian Group, Inc.

CSI	MINOR UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 21 16 00-0080		**Singlemode Fiber Bundles** *(27 21 16 00-0055)* Note: Includes optical fiber cables.		
27 21 16 00-0081	CLF	2-Fiber, Singlemode Fiber Bundle (Sumitomo FR02SX)	102.97	40.61
27 21 16 00-0082	CLF	4-Fiber, Singlemode Fiber Bundle (Sumitomo FB04SX)	126.04	40.61
27 21 16 00-0083	CLF	6-Fiber, Singlemode Fiber Bundle (Sumitomo FB06SX)	145.05	40.61
27 21 16 00-0084	CLF	12-Fiber, Singlemode Fiber Bundle (Sumitomo FB12SX)	181.69	40.61
27 21 16 00-0085	CLF	18-Fiber, Singlemode Fiber Bundle (Sumitomo FB18SX)	274.41	47.37
27 21 16 00-0086	CLF	24-Fiber, Singlemode Fiber Bundle (Sumitomo FB24SX)	357.20	47.37
27 21 16 00-0087		**Tube Distribution Cabinets** *(27 21 16 00-0055)*		
27 21 16 00-0088	EA	Modular Tube Distribution Cabinet (Sumitomo DE06MDU) Note: Up to six 7-tube cables or two 19-tube cables.	218.55	56.50
27 21 16 00-0089		**Modular Fiber Termination Cabinets** *(27 21 16 00-0055)*		
27 21 16 00-0090	EA	24-Fiber Capacity, Wall Mount, Modular Fiber Termination Cabinet (Sumitomo FT24WFM)	271.78	56.50
27 21 16 00-0091	EA	48-Fiber Capacity, Wall Mount, Modular Fiber Termination Cabinet (Sumitomo FT48WFM)	288.61	56.50
27 21 16 00-0092		**Tube Distribution Accessories** *(27 21 16 00-0055)*		
27 21 16 00-0093	EA	Plastic Push/Pull Quick Release Pneumatic Cap For 8 mm Tube (Sumitomo DE08MA)	13.19	5.65
27 21 16 00-0094	EA	Plastic Push/Pull Quick Release Pneumatic Coupling For 8 mm Tube (Sumitomo DE08MC2)	14.37	5.65
27 21 16 00-0095	EA	Brass Push/Pull Quick Release Pneumatic Coupling For 8 mm Bulkhead Tube (Sumitomo DE08MB)	17.41	5.65
27 21 16 00-0096		**Communications Optical Fiber Cabling** *(27 21 16 00-0009)*		
27 21 16 00-0097		**Communications Optical Fiber Cable Splicing And Terminations** *(27 21 16 00-0096)*		
27 21 16 00-0098		**Field Installed Fiber Connectors** *(27 21 16 00-0097)*		
27 21 16 00-0099	EA	SC Type, Singlemode, Field Installed Fiber Connector (Corning 95-200-42)	36.06	8.48
27 21 16 00-0100	EA	SC Type, 62.5 Micron Multimode, Field Installed Fiber Connector (Corning 95-000-41)	32.17	8.48
27 21 16 00-0101		**Buffer Tube Fan-Out Kits** *(27 21 16 00-0097)*		
27 21 16 00-0102		**Buffer Tube Breakout Kits (Sumitomo)** *(27 21 16 00-0101)* Note: Includes 900 micron tubing.		
27 21 16 00-0103	EA	2-Fiber Breakout Kit (Sumitomo FTFLD02)	241.89	112.80
27 21 16 00-0104	EA	4-Fiber Breakout Kit (Sumitomo FTFLD04)	245.96	112.80
27 21 16 00-0105	EA	6-Fiber Breakout Kit (Sumitomo FTFLD06)	249.56	112.80
27 21 16 00-0106	EA	12-Fiber Breakout Kit (Sumitomo FTFLD12)	260.73	112.80
27 21 16 00-0107	EA	18-Fiber Breakout Kit (Sumitomo FTFLD18)	276.01	112.80
27 21 16 00-0108	EA	24-Fiber Breakout Kit (Sumitomo FTFLD24)	287.36	112.80
27 21 16 00-0109		**Buffer Tube Fan-Out Kits (Corning)** *(27 21 16 00-0101)*		
27 21 16 00-0110	EA	12 Fiber, 25" Tube Length, Indoor Buffer Tube Fan-Out Kit (Corning Fan-BT25-12)	243.77	112.80
27 21 16 00-0111	EA	12 Fiber, 25" Tube Length, Outdoor Buffer Tube Fan-Out Kit (Corning Fan-OD25-12)	284.10	112.80
27 21 16 00-0112		**Communications Copper Cabling** *(27 21 16 00-0009)*		
27 21 16 00-0113		**Copper Communications Cable Splicing And Terminations** *(27 21 16 00-0112)*		
27 21 16 00-0114		**Copper Communications Cable Splice Cases** *(27 21 16 00-0113)*		
27 21 16 00-0115	EA	6.5" x 28.4" Copper Communications Cable Splice Case (Preformed Line Products 8000626)	1,227.56	225.60
27 21 16 00-0116	EA	9.5" x 28.4" Copper Communications Cable Splice Case (Preformed Line Products 8000630)	1,449.45	225.60
27 21 16 00-0117	EA	12.5" x 28.4" Copper Communications Cable Splice Case (Preformed Line Products 8006219)	2,186.76	225.60
27 21 16 00-0118		**Modular Splice Connectors** *(27 21 16 00-0113)*		
27 21 16 00-0119	EA	25-Pair, Straight Body Only, 26-24 Gauge Cable, Filled Modular Splice Connector (3M 710-SC1-25)	123.56	56.40
27 21 16 00-0120	EA	25-Pair, Straight/Half Tap Body, 26-24 Gauge Cable, Dry Modular Splice Connector (3M 710-SD1-25)	121.17	56.40
27 21 16 00-0121	EA	25-Pair, Straight/Half Tap Body, 26-24 Gauge Cable, Filled Modular Splice Connector (3M 710-TC1-25)	123.62	56.40
27 21 16 00-0122	EA	25-Pair, Bridge Body, 26-22 Gauge Cable, Filled Modular Splice Connector (3M 710-BC1-25)	123.28	56.40
27 21 26		**Data Communications Network Management** *(27 21)*		
27 21 26 00-0001		**Data Communications Network Management** *(27 21 26)*		
27 21 26 00-0002	EA	3 Port, Terminal/Serial Device Server (Comtrol 99560-9)	723.65	28.20
27 21 26 00-0003	EA	2 Port, Terminal/Serial Device Server (Comtrol 99550-0)	553.67	28.20
27 21 26 00-0004	EA	4 Port, DB9 Terminal/Serial Device Server (Comtrol 99445-9)	778.24	28.20
27 21 26 00-0005	EA	4 Port, DB9 Terminal/Serial Device Server (Comtrol 99448-0)	1,228.54	28.20
27 21 26 00-0006	EA	24 Watt, Din Rail Mountable, Power Adapter (Comtrol PS1020)	112.67	
27 21 26 00-0007	EA	Remote Data Port, Spectra Positioning System (Pelco IPS_RDPE_2)	540.63	16.92
27 21 26 00-0008	EA	Sennetech Code Translator (Pelco SCT_100_AD232)	890.36	28.20
27 21 26 00-0009	EA	VPN Router (Cisco 819HG)	5,096.08	361.59
27 21 26 00-0010	EA	Cisco Catalyst 3000 Series Switches (Cisco IE-3000 - 8TC)	3,554.50	361.59

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 21 26 00-0011	EA	WS-C4507R+E Chassis, Two WS-X4648-RJ45V+E, Sup7L-E, LAN Base (Cisco WS-C4507RE+96V+)	19,741.83	135.36
27 21 26 00-0012	EA	SMARTnet Extended Service Agreement, SNTC-8X5XNBD WS-C4507R+E Chassis,2 WS-X4648-RJ45V+E (Cisco CON-SNT-C4507REV)	635.25	
27 21 26 00-0013	EA	Sup8-E And WS-X4748-RJ45V+E Upgrade For Bundle (Cisco C4500E-S7L-S8)	13,574.42	135.36
27 21 26 00-0014	EA	Catalyst 4500 E-Series Redundant Supervisor 8-E (Cisco WS-X45-SUP8-E/2)	29,732.53	135.36
27 21 26 00-0015	EA	Catalyst 4500 2GB SD Memory Card (Cisco SD-X45-2GB-E)	702.38	11.30
27 21 26 00-0016	EA	Catalyst 4500 4200W AC Dual Input Power Supply (Data + PoE) (Cisco PWR-C45-4200ACV)	5,160.84	14.10
27 21 26 00-0017	EA	Catalyst 4500 4200W AC Dual Input Power Supply (Data + PoE) (Cisco PWR-C45-4200ACV/2)	4,474.91	14.10
27 21 26 00-0018	EA	13', NEMA 6-20 To IEC-C19 Power Cable (Cisco CAB-US620P-C19-US)	78.17	5.65
27 21 26 00-0019	EA	1000BASE-SX SFP Transceiver Module, MMF, 850nm, DOM (Cisco GLC-SX-MMD=)	238.18	56.40
27 21 26 00-0020	EA	Cisco Catalyst 3850 24 Port Data IP Base (Cisco WS-C3850--24TS)	3,750.92	135.36
27 21 26 00-0021	EA	SMARTnet Extended Service Agreement, 8X5XNBD Cisco Catalyst 3850 24 Port Data IP Base (Cisco CON-SNT-WSC384TS)	835.83	
27 21 26 00-0022	EA	North America AC Type A Power Cable (Cisco CAB-TA-NA)	24.77	5.65
27 21 26 00-0023	EA	350 Watt AC Power Supply (Cisco PWR-C1-350WAC)	344.15	14.10
27 21 26 00-0024	EA	Cisco Catalyst 3850 4x1GE Network Module (Cisco C3850-NM-4-1G)	864.10	14.13
27 21 26 00-0025	EA	1' (30cm), Catalyst 3750X Stack Power Cable (Cisco CAB-SPWR-30CM)	125.38	5.65
27 21 26 00-0026	EA	Rack Mount Switch 16 100 SFP 8 10/100 PoE 2 Geuplinks (Cisco IE-3010-16S-8PC)	4,504.92	135.36
27 21 26 00-0027	EA	SMARTnet Extended Service Agreement, 8X5XNBD IA Rack Mount Switch 16 100 SFP 8 10/10 (Cisco CON-SNT-301016S8)	839.18	
27 21 26 00-0028	EA	IE 3010 Power Supply (Cisco PWR-RGD-AC-DC/IA)	738.67	14.10
27 21 26 00-0029	EA	IE 3010 AC-DC Redundant Power Supply (Cisco PWR-RGD-AC-DC/IAR)	750.37	14.10
27 21 26 00-0030	EA	4 Ethernet 10/100 Ports And 2 Dual-Purpose Uplinks, Industrial Ethernet Switch (Cisco IE-3000-4TC)	1,530.70	135.36
27 21 26 00-0031	EA	Expansion Power Module For Cisco IE-3000-4TC (Cisco PWR-IE50W-AC-IEC)	404.38	14.13
27 21 26 00-0032	EA	4 Port, Expansion SFP Module for IE-3000-4TC (Cisco IEM-3000-4SM)	1,917.27	14.13
27 21 26 00-0033	EA	Router (CISCO IR829)	1,701.12	56.50
27 21 26 00-0034	EA	Network Router (Cradlepoint IBR600C)	838.89	56.50

27 21 29 Data Communications Switches and Hubs *(27 21)*

27 21 29 00-0001 Data Communications Multimedia Modular Patch Panels *(27 21 29)*

Note: Unloaded multimedia patch panels that accept modular jacks for category 3, 5e, 6, fiber optic, etc. Excludes rack, modular jacks and terminations. See CSI section 27 15 43 00-0046 for modular jacks.

27 21 29 00-0002	EA	12 Port, Wall Mount Multimedia Modular Patch Panel, Unloaded	108.33	5.64
27 21 29 00-0003	EA	16 Port, Rack Mount Multimedia Modular Patch Panel, Unloaded	119.59	5.64
27 21 29 00-0004	EA	24 Port, Rack Mount Multimedia Modular Patch Panel, Unloaded	141.38	5.64
27 21 29 00-0005	EA	36 Port, Rack Mount Multimedia Modular Patch Panel, Unloaded	148.07	5.64
27 21 29 00-0006	EA	48 Port, Rack Mount Multimedia Modular Patch Panel, Unloaded	161.91	7.05
27 21 29 00-0007	EA	24 Port, Rack Mount Multimedia Modular Angled Patch Panel, Unloaded	153.62	5.64
27 21 29 00-0008	EA	48 Port, Rack Mount Multimedia Modular Angled Patch Panel, Unloaded	192.79	7.05
27 21 29 00-0009	EA	Rack Mount Rear Cable Management Bar	68.77	7.05

27 21 33 Data Communications Wireless Access Points *(27 21)*

27 21 33 00-0001 Data Communications Wireless Access Points *(27 21 33)*

27 21 33 00-0002	EA	Base Station Unit, 300 Mbps, MIMO 2x2, Type-N Connectors US PoE (Proxim Wireless MP-8200-BSU)	5,222.02	169.20
27 21 33 00-0003	EA	Base Station Unit, 300 Mbps, MIMO 2x2, 23 dBi, 10° Panel Antenna - US PoE (Proxim Wireless MP-8250-BS1)	12,623.64	169.20
27 21 33 00-0004	EA	Base Station Unit, 300 Mbps, MIMO 2x2, 16 dBi, 90 Degree Sector Antenna US PoE (Proxim Wireless MP-8250-BS9)	12,623.64	169.20
27 21 33 00-0005	EA	Subscriber Unit, 300 Mbps, MIMO 2x2, Type-N Connectors US PoE (Proxim Wireless MP-8200-SUA)	2,009.69	169.20
27 21 33 00-0006	EA	Subscriber Unit, 300 Mbps, MIMO 2x2, 23 dBi, Panel Antenna US PoE (Proxim Wireless MP-8250-SUR)	2,369.28	193.55
27 21 33 00-0007	EA	Base Station Unit, 300 Mbps, MIMO 3x3, GPS Sync Ready, Type-N Connectors - US PoE (Proxim Wireless MP-8200-BSU-G)	6,730.01	193.55
27 21 33 00-0008	EA	Base Station Unit, 300 Mbps, MIMO 2x2, GPS Sync Ready, 23 dBi, 10° Panel Antenna - US PoE (Proxim Wireless MP-8250-BS1-G)	10,254.62	193.55
27 21 33 00-0009	EA	Base Station Unit, 300 Mbps, MIMO 2x2, GPS Sync Ready, 16 dBi, 90° Sector Antenna - US PoE (Proxim Wireless MP-8250-BS9-G)	10,254.62	193.55
27 21 33 00-0010	EA	50 Mbps (upgradable to 100 Mbps), MIMO 2x2, 15 dBi integrated antenna - US PoE (Proxim Wireless QB-825-LNK-50)	2,096.42	64.51
27 21 33 00-0011	EA	100 Mbps, MIMO 2x2, 15 dBi integrated antenna - US PoE (Proxim Wireless QB-825-LNK-100)	2,126.01	64.51
27 21 33 00-0012	EA	Surge, Gigabit Surge Protector With Shielded RJ45 (Proxim Wireless ETH-SURGE-1G)	190.35	32.26
27 21 33 00-0013	EA	FlexPort uWave AdaptRate And Modulation Feature Upgrade (BridgeWave Communications FPUWAVE-UPG-ARM)	1,838.87	
27 21 33 00-0014	EA	1' High Performance Dish Antenna, Low Profile, 21.2-23.6 GHz, WR42 Flange, SOI (Radio Waves HPLP1-23RR)	637.71	56.40
27 21 33 00-0015	EA	Cellular Phone / Wi-Fi Antenna (Sierra Wireless AP-CWG-Q-S222-WH)	525.29	56.40
27 21 33 00-0016	EA	Cell LTE MIMO Antenna (Sierra Wireless 1810075)	88.91	22.56
27 21 33 00-0017	EA	AirLink GX400 Power Adapter (Sierra Wireless 2700384)	83.16	
27 21 33 00-0018	EA	AirLink GX400 Power Cable (Sierra Wireless 2000380)	47.74	
27 21 33 00-0019	EA	Cellular/PCS/LTE, Hockey Puck Antenna (Sierra Wireless AP-C-Q-S2-BL)	330.02	56.40
27 21 33 00-0020	EA	Cellular/PCS/LTE/GPS, Multi-Band Antenna (Sierra Wireless AP-CG-Q-S22-BL)	332.19	56.40
27 21 33 00-0021	EA	2 Way, RF Power Divider, 790-920 MHZ (Telewave ANTPD28D)	460.37	56.50
27 21 33 00-0022	EA	Wireless Cellular Modem (Sierra Wireless AirLink GX400 EVDO/GPS)	1,182.90	84.75
27 21 33 00-0023	EA	Wireless Cellular Modem (Sierra Wireless AirLink GX450 Rugged)	1,521.26	84.75
27 21 33 00-0024	EA	Magnetic Mount Cellular Antenna (Wilson Electronics 301125)	81.23	16.92
27 21 33 00-0025	EA	Yagi Antenna, 890-960 MHz, 10 dBd Gain (PCTEL Bluewave Antennas BGYD890K)	310.36	64.51
27 21 33 00-0026	EA	Andrew® Omni Antenna, 890–960 MHz, 360° Horizontal Beamwidth, Fixed Electrical Tilt, Fits On 38–51 mm (1-1/2 to 2 in) OD Pipe (Commscope DB583-Y)	1,059.92	64.51
27 21 33 00-0027	EA	Single Channel Bluetooth Sensor With Bluetooth Module And Antenna (DeepBlue SC)	5,286.91	56.50
27 21 33 00-0028	EA	Point-to-Point Wireless Bridge (Proxim Tsunami® QB-10150)	2,675.63	56.40

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

27 30 Voice Communications *(27)*

27 32 Voice Communications Terminal Equipment *(27 30)*

Note: Includes testing of new devices and certification.

27 32 13 Telephone Sets *(27 32)*

27 32 13 00-0001 Interior Telephone Components *(27 32 13)*

27 32 13 00-0002	EA	Solid State Exchange Unit With Power Supply	7,885.79	1,030.77
27 32 13 00-0003	EA	Dial Telephone - Handset In Cabinet	958.25	84.26
27 32 13 00-0004	EA	Elevator Cab Telephone With Trailer Cable	472.23	90.35
27 32 13 00-0005	EA	Loud Ring Bell, 6"	366.65	83.81
27 32 13 00-0006	EA	Audio/Visual Indicator	475.57	78.96
27 32 13 00-0007	EA	Administrative Telephone With Digital Display	498.81	70.84
27 32 13 00-0008	EA	Processing Unit For 16 Station System	2,403.10	577.87
27 32 13 00-0009	EA	Handset For 16 Station System	349.40	57.53
27 32 13 00-0010	EA	Handset In Cabinet, For 16 Station System	473.39	77.60
27 32 13 00-0011	MLF	20 Conductor Unshielded Cable, #22	2,943.79	1,243.85
27 32 13 00-0012	EA	Power Supply For 16 Station System	414.83	153.53
27 32 13 00-0013	EA	Intercom Terminal Board	355.33	172.81
27 32 13 00-0014	EA	Power Supply For Five Station System, 24 Volt DC	433.05	153.53
27 32 13 00-0015	EA	Telephone Communication Board, Insulated Blueboard 24" x 24" x 1/2" Thick	214.75	63.07
27 32 13 00-0016	EA	Telephone Cabinet With Backboard 24" High x 24" Wide x 6" Deep	689.45	138.81
27 32 13 00-0017	EA	Telephone Cabinet With Backboard 30" High x 24" Wide x 6" Deep	816.10	157.77
27 32 13 00-0018	EA	Telephone Cabinet With Backboard 30" High x 30" Wide x 6" Deep	991.17	186.73
27 32 13 00-0019	EA	Telephone Cabinet With Backboard 36" High x 30" Wide x 6" Deep	1,175.45	201.88
27 32 13 00-0020	EA	Telephone Cabinet With Backboard 48" High x 30" Wide x 6" Deep	1,859.09	229.70
27 32 13 00-0021	EA	Ring Rung 3"	12.51	6.29
27 32 13 00-0022	EA	G66B50 Telephone Blocks Including 50 Terminators, Exterior Ring, Marking, ID	31.95	11.17
27 32 13 00-0023	EA	G110 Data Blocks Including Terminator, Exterior Ring, Marking, ID And Testing	57.05	22.89

27 32 13 00-0024 Interior Telephone Accessories *(27 32 13)*

27 32 13 00-0025	EA	Blank Telephone Receptacle, Exposed Devices - Complete	12.81	6.09
27 32 13 00-0026	EA	4-Pin Telephone Receptacle, Exposed Devices - Complete	28.98	23.47
27 32 13 00-0027	EA	Dual Flush Mounted, Level 5, RJ-45 Jack, Complete	74.24	25.76
27 32 13 00-0028	EA	Wall Mount, Level 5, RJ-45 Jack, Complete	69.19	25.76
27 32 13 00-0029	EA	Terminating Strips, Inside	140.91	51.52
27 32 13 00-0030	EA	Dual Outlet, 4-Pin Telephone Receptacle, Concealed Type RJ-45 - Complete	58.84	26.51
27 32 13 00-0031	EA	Ready Access Closure 3 To 25 Pair	170.46	62.16
27 32 13 00-0032	EA	Ready Access Closure 25 To 100 Pair	201.87	69.49
27 32 13 00-0033	EA	Termination Block With Bracket 25 Pair	66.52	20.87
27 32 13 00-0034	EA	RJ-11 Telephone Receptacle, Concealed Devices - Complete	57.70	26.17
27 32 13 00-0035	EA	Interior Protected Terminal 25 Pair	826.88	150.70
27 32 13 00-0036	EA	Interior Protected Terminal 50 Pair	1,000.76	153.07
27 32 13 00-0037	EA	Pedestal 6" x 6" x 50" 3 To 100 Pair	327.14	62.72
27 32 13 00-0038	EA	Pedestal 8" x 8" x 50" 100 To 300 Pair	339.26	62.72
27 32 13 00-0039	EA	Pedestal 10" x 10" x 43" 300 To 600 Pair	450.07	80.20
27 32 13 00-0040	EA	Pedestal 10" x 16" x 439 600 Pair	951.34	144.49
27 32 13 00-0041	EA	Entrance Protector Terminal 100 Pair	1,344.39	164.91
27 32 13 00-0042	EA	Gas Protection Module	18.41	5.64
27 32 13 00-0043	EA	Terminating Boxes, Outside With 3 Element Protectors, Per Pair	35.55	5.15

27 32 26 Ring-Down Emergency Telephones *(27 32)*

27 32 26 00-0001 Emergency Telephone *(27 32 26)*

Note: Includes CB3000 speakerphone, 3 auxiliary Inputs, 2 auxiliary outputs, phone line surge suppressor, analog telephone connection, 70 watt area light with blue beacon, high power strobe, lighted faceplate, 110VAC power, ultra weather resistant finish, vandal resistant hardware, UV resistant Lens, dome vent; flat area for directory, access control or other options; 12.75" diameter/8'-6" height, 1/4" thick steel construction, foundation anchor kit, ADA compliant.

27 32 26 00-0002	EA	Code Blue 1-Standard Emergency Telephone Pedestal Unit (CB 1-s) Note: Includes IA4100 FP1 analog speakerphone with single red 'Push For Help' button, 'Push For Help' bezel, hard wire phone line, passive vent at top, 24V AC, and standard color.	11,809.22	464.55
27 32 26 00-0003	EA	Code Blue 1-Dual Emergency Telephone Pedestal Unit (CB 1-d) Note: Includes IA4100 FP1 analog speakerphone with single red 'Push For Help' button, 'Push For Help' bezel, blank stainless steel plate second opening, hard wire phone line, passive vent at top, 24V AC, and standard color.	12,442.35	464.55
27 32 26 00-0004	EA	Analog Speakerphone With Black Info Button And Red Push For Help Button Code Blue Option (Code Blue IA4100 FP2)	211.04	
27 32 26 00-0005	EA	Analog Speakerphone With Black Call Button, Keypad And Red Push For Help Button Code Blue Option (Code Blue IA4100 FP2-K)	316.57	
27 32 26 00-0006	EA	IP Speakerphone With Single Red Push For Help Button Code Blue Option (Code Blue IP5000 FP1)	791.42	
27 32 26 00-0007	EA	IP Speakerphone With Back Info Button And Red Push For Help Button Code Blue Option (Code Blue IP5000 FP2)	1,076.33	
27 32 26 00-0008	EA	IP Speakerphone With Black Call Button, Keypad And Red Push For Help Button Code Blue Option (Code Blue IP5000 FP2-K)	1,181.85	
27 32 26 00-0009	EA	EMERGENCY (Raised Letters With Braille) Main Bezel Code Blue Option	21.10	
27 32 26 00-0010	EA	EMERGENCY/EMERGENCIA (Raised Letters With Braille) Main Bezel Code Blue Option	21.10	
27 32 26 00-0011	EA	Directory, Second Opening Code Blue Option	189.94	
27 32 26 00-0012	EA	Camera Enclosure With Color IP Camera, Second Opening Code Blue Option	2,004.93	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 32 26 00-0013	EA	HID Card Reader, Second Opening Code Blue Option	928.60	
27 32 26 00-0014	EA	HID Card Reader And Color IP Camera, Second Opening Code Blue Option	3,007.39	
27 32 26 00-0015	EA	IP Wireless Communication Code Blue Option Note: 802.11g or secure mesh 5.8. (system UPS backup or unit Night Charge recommended). IP5000 VoIP Speakerphone option must be ordered when selecting IP Wireless Communications. Requires Base Unit(s) and site survey.	6,320.79	
27 32 26 00-0016	EA	Active Venting Code Blue Option	337.67	
27 32 26 00-0017	EA	Night Charge Power Code Blue Option Note: Requires 120V AC external power supplied to Code Blue unit.	2,944.08	
27 32 26 00-0018	EA	Power Transformer Kit, Alternate Incoming Power Code Blue Option	738.66	
27 32 26 00-0019	EA	Overhead Camera Mount Code Blue Option Note: Excludes camera.	1,677.81	
27 32 26 00-0020	EA	Custom Color For Overhead Camera Mount Code Blue Option	73.87	

27 32 26 00-0021 City Police Call System *(27 32 26)*

27 32 26 00-0022 Components *(27 32 26 00-0021)*

27 32 26 00-0023	EA	City Police Call System	913.78	131.52
27 32 26 00-0024	EA	Concrete Foundation For Police Department Telephone Post	794.72	190.52

27 40 Audio-Video Communications *(27)*

27 41 Audio-Video Systems *(27 40)*

27 41 16 Integrated Audio-Video Systems and Equipment *(27 41)*

Note: Includes testing of new devices and certification.

27 41 16 00-0001 Television Distribution System *(27 41 16)*

See CSI section 26 05 19 16-0309 for basic wiring.

27 41 16 00-0002 Mounted Television Support *(27 41 16 00-0001)*

27 41 16 00-0003	EA	Ceiling Mounted Television Support, 19" To 20"	481.47	126.56
27 41 16 00-0004	EA	Ceiling Mounted Television Support, 19" To 20" With Rack	630.73	141.25
27 41 16 00-0005	EA	Ceiling Mounted Television Support, 25" To 27"	504.90	126.56
27 41 16 00-0006	EA	Ceiling Mounted Television Support, 25" To 27" With Rack	654.16	141.25
27 41 16 00-0007	EA	Wall Mounted Television Support, 13"	382.23	101.70
27 41 16 00-0008	EA	Wall Mounted Television Support, 13" With Rack	531.45	113.00
27 41 16 00-0009	EA	Wall Mounted Television Support, 19" To 20"	412.97	101.70
27 41 16 00-0010	EA	Wall Mounted Television Support, 19" To 20" With Rack	562.20	113.00
27 41 16 00-0011	EA	Wall Mounted Television Support, 25" To 27"	443.72	101.70
27 41 16 00-0012	EA	Wall Mounted Television Support, 25" To 27" With Rack	592.94	113.00

27 41 16 00-0013 Distribution System *(27 41 16 00-0001)*

See CSI section 26 05 13 16-0001 for wire and cabling.

27 41 16 00-0014 TV Distribution Rack *(27 41 16 00-0013)*

27 41 16 00-0015	EA	Steel Rack Cabinet With Shelves	1,798.20	207.44
27 41 16 00-0016	EA	Switch And Pilot Light	259.97	92.16
27 41 16 00-0017	LF	Surface Raceway With Outlets	30.61	12.52
27 41 16 00-0018	EA	Service Label	35.52	17.26

27 41 16 00-0019 Head End Amplifier *(27 41 16 00-0013)*

27 41 16 00-0020	EA	Head End Amplifier	1,199.78	138.07

27 41 16 00-0021 UHF In-Line Booster Amplifier And Power Supply *(27 41 16 00-0013)*

27 41 16 00-0022	EA	UHF In-Line Booster	681.68	138.07

27 41 16 00-0023 Preamplifiers *(27 41 16 00-0013)*

27 41 16 00-0024	EA	VHF Preamplifier	864.12	138.07
27 41 16 00-0025	EA	UHF Preamplifier	681.68	138.07

27 41 16 00-0026 Power Supplies *(27 41 16 00-0013)*

27 41 16 00-0027	EA	Common Power Supply	1,234.46	197.29

27 41 16 00-0028 Line Splitter And Mixer *(27 41 16 00-0013)*

27 41 16 00-0029	EA	Line Splitter	97.16	46.02
27 41 16 00-0030	EA	Two-Way Splitter	111.68	46.02
27 41 16 00-0031	EA	Frequency Filter	258.81	69.14
27 41 16 00-0032	EA	Line Splitter And Mixer	297.41	101.52

27 41 16 00-0033 Power Line Filters *(27 41 16 00-0013)*

27 41 16 00-0034	EA	120-Volt Power Supply Line Filter	515.37	92.16

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 41 16 00-0035		Wall Box And Receiver Outlets *(27 41 16 00-0013)*		
27 41 16 00-0036	EA	Wall Box With Lockable Cover, Excluding Outlet Plug	258.81	69.14
27 41 16 00-0037	EA	TV Receiver Outlet Plug	111.68	46.02
27 41 16 00-0038	EA	TV Camera Outlet Plug	111.68	46.02
27 41 16 00-0039	EA	Audio Outlet Plug	93.49	46.02
27 41 16 00-0040	EA	12 Ft RG 6U Cable With G-59 And TV Set Fittings	196.11	92.16
27 41 16 00-0041	EA	Male Plug PL-259	111.68	46.02
27 41 16 00-0042	EA	Wall Box And Receiver Outlet Television Outlets	128.04	48.27
27 41 23		**Audio-Video Accessories** *(27 41)*		
27 41 23 00-0001		Signaling *(27 41 23)*		
27 41 23 00-0002	EA	Explosion Proof Signaling Strobe Light, Federal #27XST-120	2,722.94	108.21
27 41 23 00-0003	EA	Explosion Proof Signaling Revolving Warning Light, Federal #121X-120	2,605.58	108.21
27 41 23 00-0004	EA	Explosion Proof Signaling Horn, Federal #41X-024-1	2,084.91	108.21
27 41 23 00-0005	EA	Explosion Proof Signaling Horn, Federal #31X-120-3	1,603.12	108.21
27 41 23 00-0006	EA	Hazardous Location Warning Lights, Strobe, Glass, Federal #151XST-120	1,198.31	108.21
27 41 23 00-0007	EA	Hazardous Location Warning Lights, Strobe, Poly, Federal #225XST-120	863.12	108.21
27 41 23 00-0008	EA	Hazardous Location Warning Lights, Steady Burning Light, Federal #191X-0240250	680.75	108.21
27 41 23 00-0009	EA	Visual Signaling Devices, Revolving, Federal #121S-120	723.22	108.21
27 41 23 00-0010	EA	Visual Signaling Devices, Revolving, Federal #371L-120	2,209.45	108.21
27 41 23 00-0011	EA	Visual Signaling Devices, Strobe, Federal #FB2PST-120	796.81	108.21
27 41 23 00-0012	EA	Visual Signaling Devices, Strobe, Federal #131DST-120	1,175.68	108.21
27 41 23 00-0013	EA	Pendant Fixture, Crouse-Hinds EVAS101R Or EVAS201R	4,692.02	108.21
27 41 23 00-0014	EA	Pendant Fixture With Guard, Crouse-Hinds EVAS110R Or EVAS210R	4,749.24	108.21
27 41 23 00-0015	EA	Wall Fixture, Crouse-Hinds EVBS101R Or EVBS201R	5,063.93	108.21
27 41 23 00-0016		Visual And Audible Signals *(27 41 23)*		
27 41 23 00-0017	EA	4" x 4" x 2-1/2" Deep Vibrating Horn	246.80	28.20
27 41 23 00-0018	EA	4" x 4" x 3.4" Deep Vibrating Bell	335.97	28.20
27 41 23 00-0019	EA	6" x 6" x 3.8" Deep Vibrating Bell	406.03	28.20
27 41 23 00-0020	EA	8" x 8" x 19-3/4" Deep Resonating Horn	1,369.05	36.66
27 41 23 00-0021	EA	3 Tone Electric Siren, NEMA 3R	1,281.16	36.66
27 41 23 00-0022	EA	16 Tone Electric Siren	2,028.35	42.30
27 41 23 00-0023	EA	Wall Mounting Brackets For Visual Signals	240.45	28.20
27 41 23 00-0024	EA	Wall Mounting Brackets For Explosionproof Visual Signals	644.40	28.20
27 41 23 00-0025	EA	Dome Guard For Explosionproof Visual Signals	98.43	14.10
27 41 33		**Master Antenna Television Systems** *(27 41)*		
27 41 33 00-0001		Antenna Systems *(27 41 33)*		
27 41 33 00-0002		Antenna *(27 41 33 00-0001)*		
27 41 33 00-0003	EA	Amateur Radio Antenna	1,132.61	169.20
27 41 33 00-0004	EA	Multi-Band Radio Antenna	871.27	169.20
27 41 33 00-0005		Receptacles *(27 41 33 00-0001)*		
27 41 33 00-0006	EA	Amateur Radio Antenna System Receptacle With Mating Plugs And Adapter	240.59	69.14
27 41 33 00-0007	EA	Multi-Band Radio Antenna System Receptacle With Mating Plugs	240.59	69.14

27 50 Distributed Communications and Monitoring Systems *(27)*

27 51 Distributed Audio-Video Communications Systems *(27 50)*

27 51 17 Video Intercom and Exterior Gate Control System *(27 51)*

27 51 17 00-0001		Video Intercom And Exterior Gate Control System *(27 51 17)*		
27 51 17 00-0002	EA	Audio Video Master Control Station With Handset, White Finish (Aiphone IX-MV7-HW)	1,567.02	141.25
27 51 17 00-0003	EA	Audio Video Master Control Station (Aiphone AX-8MV)	1,251.73	141.25
27 51 17 00-0004	EA	16-call Add-on Selector For AX Masters (Aiphone AX-16SW)	501.46	141.25
27 51 17 00-0005	EA	Central Exchange Unit (Aiphone AX-084C)	1,511.90	70.62
27 51 17 00-0006	EA	Central Exchange Unit (Aiphone AX-248C)	2,068.03	70.62
27 51 17 00-0007	EA	Touch Tone Programmable Dialer (Viking K-1900-5)	149.25	28.25
27 51 17 00-0008	EA	Surface Mount Audio/Video Door Station (Aiphone IX-DV)	1,096.48	28.25
27 51 17 00-0009	EA	Surface Or Flush Wall Mount Audio/Video Door Station (Aiphone IX-DVF)	1,510.34	28.25
27 51 17 00-0010	EA	Surface Mount Audio/Video Door Station (Aiphone AX-DV)	484.18	28.25
27 51 17 00-0011	EA	Flush Mount Audio/Video Door Station (Aiphone AX-DVF)	546.95	28.25
27 51 17 00-0012	EA	12 Volt, 2.5 Amperes, DC Power Supply (Aiphone PS-1225UL) Note: UL Listed	146.48	14.13
27 51 17 00-0013	EA	24 Volt, 2 Amperes, DC Power Supply (Aiphone PS-2420UL) Note: UL Listed	159.63	14.13
27 51 17 00-0014	EA	IP Video Master Station (Aiphone IX-MV)	1,922.79	141.25
27 51 17 00-0015	EA	Handset Only For IX-MV (Aiphone 285999)	65.57	5.65
27 51 17 00-0016	EA	Hands Free Sub Master Video Monitor (Aiphone JF-2HD)	791.93	141.25

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 51 17 00-0017	EA	Stainless Steel Video Door Station With HID ProxPoint Plus Reader, Flush Mount (Aiphone AX-DVF-P)	781.96	28.25
27 51 17 00-0018	EA	Stainless Steel Surface Mount Box For IS-SS, IS-DVF, IS-IPDVF, IX-DF(SS) (Aiphone SBX-IDVF)	231.66	28.25
27 51 17 00-0019	EA	Stainless Steel Surface Mount Box For AX-DVF (Aiphone SBX-AXDVF)	259.40	28.25
27 51 17 00-0020	EA	Stainless Steel Security Lock Box For IS-DV, IS-DVF, IX-DF, IX-SS, IX-DF-HID, And IX-DF-RP10 (Aiphone LB-SDVF/A)	315.39	42.38
27 51 17 00-0021	EA	Front Case With Lens Cover For AX-DV And AX-DVF Cameras (Aiphone 240880)	68.85	14.13

27 51 23 Intercommunications and Program Systems *(27 51)*

27 51 23 20 Commercial Intercommunications and Program Systems *(27 51 23)*

27 51 23 20-0001 Intercom *(27 51 23 20)*

Note: Includes classroom software packages.

27 51 23 20-0002	EA	Basic Shelf (Dukane STARCall 110-3546A)	5,645.49	339.00
27 51 23 20-0003	EA	Expanded Audio Routing Card (Dukane STARCall 110-3524B)	2,684.35	
27 51 23 20-0004	EA	Expanded Audio Switching Card (Dukane STARCall 110-3534D)	1,949.10	
27 51 23 20-0005	EA	Expanded Administrative Telephone Card (Dukane STARCall Dukane 110-3527A)	1,971.79	
27 51 23 20-0006	EA	Protected Balanced Telephone Card (Dukane STARCall 110-3775B)	4,429.44	
27 51 23 20-0007	EA	250 Watt Power Amplifier (Dukane STARCall 1A4250)	3,496.76	
27 51 23 20-0008	EA	Intercom Amplifier Module (Dukane STARCall 110-3544C)	868.91	
27 51 23 20-0009	EA	Administrative Telephone (Dukane STARCall 7A1110)	2,110.22	
27 51 23 20-0010	EA	AM/FM Tuner / CD Player Preamplifier (Dukane STARCall RCD350P)	3,744.11	
27 51 23 20-0011	EA	Digital Display (Dukane STARCall RDU350)	4,179.82	
27 51 23 20-0012	EA	UPS System, 120 Tripp Lite SMARTNET (Emerson PS220RT2-120)	3,630.42	
27 51 23 20-0013	EA	Equipment Cabinet (Atlas Sound 140-18)	1,909.81	
27 51 23 20-0014	EA	Storage Drawer (Atlas Sound SD6-14)	619.05	
27 51 23 20-0015	EA	Master Clock (Dukane 24A715)	4,576.71	
27 51 23 20-0016	EA	Corrective Clock (National Time 030-10EX-LV)	387.82	
27 51 23 20-0017	EA	Clock Backbox (National Time 143-K3)	51.04	
27 51 23 20-0018	EA	Speaker/Transformer Assembly (Dukane 5A606)	48.77	
27 51 23 20-0019	EA	Baffle (Atlas Sound 840-89)	361.88	
27 51 23 20-0020	EA	Surface Mounted Backbox (Atlas Sound SM195-89)	194.93	
27 51 23 20-0021	EA	Dual Call-In Button (Horizon DCSB-1D9)	91.79	
27 51 23 20-0022	EA	Dual Call-In Button With Privacy Control (Horizon DCSB-2P9)	114.48	
27 51 23 20-0023	EA	Telephone Punchblock	53.26	
27 51 23 20-0024	EA	Ground Rail (Edco MGB)	34.29	
27 51 23 20-0025	EA	Surge Suppressor (Edco OPX-048)	57.08	
27 51 23 20-0026	EA	Surge Suppressor (Edco HCO)	59.34	
27 51 23 20-0027	EA	Hands Free Color Video Intercom (Aiphone JF-2MED)	1,562.92	28.25

27 51 43 Sound Reinforcement *(27 51)*

Note: Includes testing of new devices and certification.

27 51 43 00-0001 Amplifiers *(27 51 43)*

27 51 43 00-0002	EA	10 Watt PA/Paging System Amplifier, 70 Volt (Bogen C10)	557.10	113.00
27 51 43 00-0003	EA	35 Watt PA/Paging System Amplifier, 70 Volt (Bogen C35)	805.31	113.00
27 51 43 00-0004	EA	60 Watt PA/Paging System Amplifier, 70 Volt (Bogen C60)	964.64	113.00
27 51 43 00-0005	EA	100 Watt PA/Paging System Amplifier, 70 Volt (Bogen 100)	1,078.31	113.00
27 51 43 00-0006	EA	150 Watt PA/Paging System Amplifier, 70 Volt (Bogen GS150)	1,353.75	113.00
27 51 43 00-0007	EA	250 Watt PA/Paging System Amplifier, 70 Volt (Bogen GS250)	1,765.65	113.00
27 51 43 00-0008	EA	Rack Mount Kit For PA/Paging System Amplifiers (Bogen GSRPK)	69.60	5.65

27 51 43 00-0009 Splitters *(27 51 43)*

27 51 43 00-0010	EA	24 Watt, 5 Output, Isolated Splitter (Doug Fleenor 125EE)	3,574.43	84.60
27 51 43 00-0011	EA	1-in/11-out Splitter (Doug Fleenor DMX)	3,221.40	84.60

27 51 43 00-0012 Speakers *(27 51 43)*

27 51 43 00-0013	EA	8", 5 Watt Recessed Ceiling Mounted Speaker With Transformer And Baffle (Atlas Sound FD72W)	206.31	30.23
27 51 43 00-0014	EA	8" Steel Baffle (Atlas Sound 51-8)	69.63	5.64
27 51 43 00-0015	EA	T-Bar Support (Atlas Sound EZ95-8)	78.30	5.64
27 51 43 00-0016	EA	8" Cylindrical Enclosure With Undercoating (Atlas Sound Q408)	124.75	5.64
27 51 43 00-0017	EA	Plate Mounted 10 Watt Attenuator With Priority Relay (Atlas Sound AT10-PA)	111.33	10.15
27 51 43 00-0018	EA	PA Speakers, 30 Watt Cone Wall Type	980.46	75.80
27 51 43 00-0019	EA	PA Speakers, 15 Watt Cone Wall Type	507.16	75.58
27 51 43 00-0020	EA	PA Speakers, 15 Watt Ceiling Type	507.16	75.58
27 51 43 00-0021	EA	PA Speakers, 15 Watt Dual Cone Wall Type	863.18	75.58
27 51 43 00-0022	EA	PA Speakers, Ceiling Speaker, 7-1/2" Diameter With 4" Speaker Area, Vinyl Clad Round Metal Grille	167.64	45.12
27 51 43 00-0023	EA	PA Speakers, 12 Watt Standard Paging Speaker With 360 Degree Swivel Bracket	409.41	45.12
27 51 43 00-0024	EA	PA Speakers, 15 Watt Standard Paging Speaker With Dustproof/Moistureproof Housing, Indoor/Outdoor	595.97	45.12
27 51 43 00-0025	EA	PA Speakers, 30 Watt Standard Paging Box Speaker, High Impact Plastic, 8 Ohm	396.89	45.12
27 51 43 00-0026	EA	PA Speakers, 30 Watt Standard Paging Box Speaker, High Impact Plastic, 25 Volt / 70 Volt / 100 Volt	471.53	45.12
27 51 43 00-0027	EA	PA Speakers, 60 Watt Marine Speaker, High Impact Acrylonitrile Butadiene Styrene (ABS) Plastic	788.54	45.12
27 51 43 00-0028	EA	PA Speakers, 15 Watt Hazardous Location Speaker, Class I, Division 1, Groups A, B, C, D; Class II, Division 2, Groups F And G	602.33	45.12
27 51 43 00-0029	EA	PA Speakers, 30 Watt Hazardous Location Speaker, Class I, Division 1, Groups A, B, C, D; Class II, Division 2, Groups F And G	1,121.41	45.12
27 51 43 00-0030	EA	PA Speakers, 15 Watt Explosionproof Speaker, Class I, Division 1, Groups B, C, D; Class II, Division 1, Groups E, F And G	1,922.76	45.12

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 51 43 00-0031	EA	Warning Horn, 120 Volt AC, 4" x 4", 100 dB, Outdoor Use	375.66	45.12
27 51 43 00-0032	EA	Cast Aluminum Weatherproof Box For Warning Horn, 4-3/8" x 4-3/8", Outdoor Use	164.77	22.56

27 51 43 00-0033 Accessories *(27 51 43)*

27 51 43 00-0034	EA	Microphone And Stand For Audio/Video System (Bogen MBS-1000A)	343.44	14.13
27 51 43 00-0035	EA	5 Disk CD Player For Audio/Video System (Bogen DCM290-P)	777.97	14.13
27 51 43 00-0036	EA	Weather Proof Horn For Audio/Video System (Bogen SPT5A)	188.38	28.25
27 51 43 00-0037	EA	Trumpet Driver And Line Matching Transformer For Audio/Video System (Atlas PD-60A)	357.41	28.25
27 51 43 00-0038	EA	Headset Microphone For Audio/Video System (Audio Technica Pro8Hex)	258.59	28.20
27 51 43 00-0039	EA	Microphone Jack For Audio/Video System	114.30	28.25
27 51 43 00-0040	EA	Terminal Cabinet For Audio/Video System (Atlas 121-18)	1,010.96	113.00
27 51 43 00-0041	EA	Volume Control For Audio/Video System (Bogen AT10A)	108.83	28.25
27 51 43 00-0042	EA	Round Bridge for 8" (S86/S810) Reccessed Speakers (Bogen Communications TB8)	73.38	28.25

27 51 43 00-0043 Removal And Reinstallation Of Speakers *(27 51 43)*

Note: Includes storage, cleaning and supply materials.

27 51 43 00-0044	EA	Removal And Reinstallation Of Ceiling Mounted Speaker	157.93	

27 52 Healthcare Communications and Monitoring Systems *(27 50)*

27 52 23 Nurse Call/Code Blue Systems *(27 52)*

27 52 23 00-0001 Wireless Equipment Nurses Call Systems *(27 52 23)*

Note: Includes all mounting hardware, batteries, cable and connections. Telectronic.

27 52 23 00-0002 Wireless Nurses Call System *(27 52 23 00-0001)*

27 52 23 00-0003	EA	NurseCall Main Unit (Rechargeable Battery Included); NCM2	8,766.55	
27 52 23 00-0004	EA	NurseCall Main Unit (Rechargeable Battery Included) 300+ Transmitters; NCM2S	9,669.48	
27 52 23 00-0005	EA	NurseCall Local Unit (Rechargeable Battery Included), Quantity 1-5 Units; NCL2	6,228.68	
27 52 23 00-0006	EA	NurseCall Local Unit (Rechargeable Battery Included), Quantity 6-10 Units; NCL2	5,021.49	
27 52 23 00-0007	EA	NurseCall Local Unit (Rechargeable Battery Included), Quantity 11-15 Units; NCL2	4,513.76	
27 52 23 00-0008	EA	NurseCall Local Unit (Rechargeable Battery Included), Quantity 16+ Units; NCL2	4,005.93	
27 52 23 00-0009	EA	Resident Bed Station With Relay; N45	1,058.64	
27 52 23 00-0010	EA	Bed Push Button For Use With N45 (9'); RB13-9	510.05	
27 52 23 00-0011	EA	Pull Cord Replacement For S35; S35PC	33.54	
27 52 23 00-0012	EA	Wall Mount Pull-Cord Transmitter/Mounting Hardware - Auto Supervision; S35S	743.95	
27 52 23 00-0013	EA	Wall Mount Pull-Cord Transmitter/Mounting Hardware - Assist Tone; S35A	743.95	
27 52 23 00-0014	EA	Remote Reset Button; S35R	721.70	
27 52 23 00-0015	EA	Waterproof Wrist Transmitter (Automatic Supervision); S37	506.87	
27 52 23 00-0016	EA	Wrist Band Replacement For S37; S37WB	43.08	
27 52 23 00-0017	EA	Locate 1 Waterproof Wrist Transceiver; S37L	624.48	
27 52 23 00-0018	EA	Locate 1 Beacon; IS75	1,993.82	
27 52 23 00-0019	EA	Wireless Smoke Detector Transmitter; SD35	1,262.82	
27 52 23 00-0020	EA	Wireless Door Contact Transmitter; RAC35	973.55	
27 52 23 00-0021	EA	Wireless Time Controlled Door Contact; RAC45	973.55	
27 52 23 00-0022	EA	Local Receiver With Relay (110 Volt AC); LE9	1,215.14	
27 52 23 00-0023	EA	Voice Response Unit (Rechargeable Battery Included); S10	2,065.33	
27 52 23 00-0024	EA	Alarm Receiving Unit (Rechargeable Battery Included); ARU	4,126.05	
27 52 23 00-0025	EA	NurseCall Programming Software; NPS	11,735.72	
27 52 23 00-0026	EA	NurseCall Printer Interface; NCPI	3,967.01	
27 52 23 00-0027	EA	NurseCall Computer Center (Includes NurseCall Software, PC, Monitor, Printer And UPS); NCCN	20,763.23	
27 52 23 00-0028	EA	9V NiMH Rechargeable Battery (Replacement For S10, NCM2, And NCL2); NMH9R	90.04	
27 52 23 00-0029	EA	6V Lithium Battery (Replacement For S35 And RAC35); LIT6	80.50	
27 52 23 00-0030	EA	9V Alkaline Battery (Replacement For N45); ALK9	36.00	
27 52 23 00-0031	EA	Giant LED Single Sided Display; NCGD	20,537.57	
27 52 23 00-0032	EA	Serial Printer; NCSP	2,115.82	
27 52 23 00-0033	EA	Modular Duplex T-Adapter (Replacement For S10); SE-486A	39.90	
27 52 23 00-0034	EA	AC Adapter (Replacement For S10); STA-4110A	78.04	
27 52 23 00-0035	EA	S10 Phone Cord (Replacement For S10); STC	39.90	
27 52 23 00-0036	EA	Waveware Paging System, Use With NCCN (Dell Computer); SPS-5	9,027.47	
27 52 23 00-0037	EA	Waveware Pagers; DAP-040	1,273.85	

27 52 23 00-0038 Wireless Nurses Call Tele/Management System *(27 52 23 00-0001)*

27 52 23 00-0039	EA	Tele/Management Unit; TP12	4,783.50	
27 52 23 00-0040	EA	Tele/Management Software; TP12S	4,793.39	

27 52 23 00-0041 Wireless Nurses Call Paging System *(27 52 23 00-0001)*

27 52 23 00-0042	EA	Standard Paging System (2.5 Watt Transmitter); RPE673	14,442.74	
27 52 23 00-0043	EA	Removal And Replacement Of Antenna For RPE673; RPE673AN	1,015.52	
27 52 23 00-0044	EA	Removal And Replacement Of Power For RPE673; RPE673PS	1,377.89	
27 52 23 00-0045	EA	Alphanumeric Pager; RPR583	1,692.58	
27 52 23 00-0046	EA	Removal And Replacement Of Holster For RPR583; RPR583H	89.30	

27 52 23 00-0047 Wireless Nurses Call System (Fisher-Berkley) *(27 52 23 00-0001)*

Note: Repair Parts: Alco Sales

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 52 23 00-0048	EA	Staff Station (Fisher-Berkley AL-59900R)	928.53	
27 52 23 00-0049	EA	Area Central Module (Fisher-Berkley AL-59901R)	727.85	
27 52 23 00-0050	EA	Dual Patient (Fisher-Berkley AL-59902R)	861.75	
27 52 23 00-0051	EA	Code Blue (Fisher-Berkley AL-59903R)	460.27	
27 52 23 00-0052	EA	Bath Emergency Station (Fisher-Berkley AL-59904R)	750.15	
27 52 23 00-0053	EA	Single Station With Sidecoom (Fisher-Berkley AL-59905R)	995.42	
27 52 23 00-0054	EA	Dual Station With Sidecom (Fisher-Berkley AL-59906R)	1,341.70	
27 52 23 00-0055	EA	Single Patient Station (Fisher-Berkley AL-59907R)	504.87	
27 52 23 00-0056	EA	Duty Station (Fisher-Berkley AL-59908R)	549.46	
27 52 23 00-0057	EA	Master Station (Fisher-Berkley AL-59909R)	7,610.06	
27 52 23 00-0058	EA	Station In/Out Board (Fisher-Berkley AL-59910R)	3,706.60	
27 52 23 00-0059	EA	Power Supply (Fisher-Berkley AL-59911R)	3,903.35	
27 52 23 00-0060	EA	Pillow Speaker (Fisher-Berkley AL-59913R)	683.25	
27 52 23 00-0061	EA	Staff Presence Station (Fisher-Berkley AL-59914R)	504.87	
27 52 23 00-0062	EA	HB System Patient Station (Fisher-Berkley AL-59915R)	571.76	
27 52 23 00-0063	EA	HB System Staff Station (Fisher-Berkley AL-59916R)	527.17	
27 52 23 00-0064	EA	Station In/Out Board Expdr (Fisher-Berkley AL-59917R)	3,070.45	
27 52 23 00-0065	EA	Master In/Out Board (Fisher-Berkley AL-59918R)	2,490.70	
27 52 23 00-0066	EA	MMC Central Processor Unit (Fisher-Berkley AL-59919R)	3,061.53	
27 52 23 00-0067		Equipment Nurses Call Systems *(27 52 23)*		
27 52 23 00-0068	EA	Nurses Call System, Page/Talk Relay Intercommunication Equipment	293.02	58.66
27 52 23 00-0069	EA	Nurses Call System, Main Equipment Panel Intercommunication Equipment	3,313.36	234.63
27 52 23 00-0070	EA	Nurses Call System, Re-Entrant Horn Intercommunication Equipment	302.83	76.70
27 52 23 00-0071	EA	Nurses Call System, Nurses Control Station Intercommunication Equipment	1,447.85	225.60
27 52 23 00-0072	EA	Nurses Call System, Duty Station Intercommunication Equipment	753.58	175.97
27 52 23 00-0073	EA	Nurses Call System, Staff Station Intercommunication Equipment	409.94	58.66
27 52 23 00-0074	EA	Nurses Call System, Single Bedside Station Intercommunication Equipment	386.84	58.66
27 52 23 00-0075	EA	Nurses Call System, Double Bedside Station Intercommunication Equipment	585.31	102.64
27 52 23 00-0076	EA	Nurses Call System, Emergency Call Button Intercommunication Equipment	168.97	45.12
27 52 23 00-0077	EA	Nurses Call System, Pull Cord Button Intercommunication Equipment	154.10	45.12
27 52 23 00-0078	EA	Nurses Call System, Single Dome Light Intercommunication Equipment	112.68	29.33
27 52 23 00-0079	EA	Nurses Call System, Double Dome Light Intercommunication Equipment	162.62	45.12
27 52 23 00-0080	EA	Nurses Call System, Pillow Speaker Intercommunication Equipment	266.18	29.33
27 52 23 00-0081	EA	Nurses Call System, Cord Set Intercommunication Equipment	123.88	29.33
27 52 23 00-0082	EA	Nurse Call System, Master-20 Station	6,856.82	225.60
27 52 23 00-0083	EA	Dukane Duty Station - Tone Only, PC1000	1,063.07	176.08

27 53 Distributed Systems *(27 50)*

27 53 13 Clock Systems *(27 53)*

27 53 13 13 Wireless Clock Systems *(27 53 13)*

27 53 13 13-0001 Wireless Synchronized GPS Clock System (Sapling) *(27 53 13 13)*

27 53 13 13-0002 Master Clock (Sapling SMA 2000 Series) *(27 53 13 13-0001)*

Note: Includes Sapling standard 2 year "material" warranty and applies to Master Clocks, Analog Clocks, Digital Clocks and Converter Boxes.

27 53 13 13-0003	EA	Master Clock, 900 MHz Transmitter, GPS, Surface Wall Mount (Sapling SMA-2S0-1100-1	8,473.33	84.60
27 53 13 13-0004	EA	Master Clock, 900 MHz Transmitter, GPS, Rack Mount And Wall Mount Antenna (Sapling SMA-2R0-1100-1)	8,961.81	84.60
27 53 13 13-0005	EA	Master Clock, 900 MHz Transmitter, Surface Wall Mount (Sapling SMA-2S0-1000-1)	4,809.74	84.60
27 53 13 13-0006	EA	Master Clock, 900 MHz Transmitter, Rack Mount And Wall Mount Antenna (Sapling SMA-2R0-1000-1)	5,298.22	84.60
27 53 13 13-0007	EA	NTP Server Upgrade (Sapling SMA-000-SERV-0)	3,343.40	

27 53 13 13-0008 Wireless Repeaters (Sapling) *(27 53 13 13-0001)*

27 53 13 13-0009	EA	Wireless Repeater, 900 MHz, RS485 Input, Surface Wall Mount (Sapling SMA-1SR-0000-1)	2,060.90	56.40
27 53 13 13-0010	EA	Wireless Network Repeater, 900 MHz, 110 VAC - 230 VAC, With TCP/IP For Campus Environments, Surface Wall Mount (Sapling SMA-1SM-0000-1)	2,310.95	56.40

27 53 13 13-0011 Wireless Round Analog Clocks (Sapling SAL-4 Series) *(27 53 13 13-0001)*

Note: Includes Sapling standard 2 year "material" warranty and applies to Master Clocks, Analog Clocks, Digital Clocks and Converter Boxes.

27 53 13 13-0012	EA	Analog, Wireless Slim Line, 900 MHz, 12" Round, Battery-Operated, Surface Wall Mount, Black Case (Sapling SAL-4BS-12R-0)	441.42	28.20
27 53 13 13-0013	EA	Double Mount Housing With Metal Pole For Slim Line 12" Round Analog Clock, Black (Sapling SAH-1BD-12R-0)	275.72	28.20
27 53 13 13-0014	EA	Analog, Wireless Slim Line, 900 MHz, 16" Round, Battery-Operated, Surface Wall Mount, Black Case (Sapling SAL-4BS-16R-0)	529.43	28.20
27 53 13 13-0015	EA	Double Mount Housing With Metal Pole For Slim Line 16" Round Analog Clock, Black (Sapling SAH-1BD-16R-0)	312.27	28.20

27 53 13 13-0016 Wireless GPS Accesories (Sapling) *(27 53 13 13-0001)*

27 53 13 13-0017	EA	GPS Mounting Kit (Sapling M-GPS-MTG-KIT-1)	81.90	22.56
27 53 13 13-0018	EA	Wall Mount, L-Shape, GPS Mounting Kit (Sapling M-GPS-MTG90-KIT-1)	118.67	22.56
27 53 13 13-0019	EA	GPS Antenna Cable, 150 Foot (45.7 Meters) Length (Sapling E-ANT-CBL150F-1)	1,064.11	49.35
27 53 13 13-0020	EA	GPS Antenna Cable, 300 Foot (91.4 Meters) Length (Sapling E-ANT-CBL300F-1)	1,896.29	70.50
27 53 13 13-0021	EA	GPS Surge Protector/Arrestor (Sapling E-GPS-SURGE-1)	669.51	5.64

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 53 13 13-0022		2.4 GHz, 2.5", 6-Digit, Digital Messaging Wireless Clock System (Sapling SLDG 3000 Series) *(27 53 13 13)*		
		Note: Includes Sapling standard 2 year "material" warranty and applies to Master Clocks, Analog Clocks, Digital Clocks and Converter Boxes. Quantities over 25 for all digital clocks are Non-Cancelable, Non-Returnable (NCNR). (50) Clock Mininum Quantity Required Per System order for SDLG-32S-256-4R. (25) Clock Mininum Quantity Required Per System order for SDLG-32S-256-1R. All digital clocks are available without bezel or without the housing. Contact Sapling for details. Contact Sapling for Factory Customized Message Options. All digital clocks are pre-loaded and shipped with the following messages below: (1) Tornado Warning (2) Inclement Weather (3) Take Cover (4) Evacuate (5) Lockdown (6) Fire (7) Early Dismissal (8) Flood Warning (9) Earthquake (10) Code Blue (11) All Clear (12) Operation in Progress (13) Test in Progress (14) Lunch Break (15) Shift Break.		
27 53 13 13-0023	EA	3200 Digital Messaging Wireless Clock, 2.4 GHz, 2.5", Dot Matrix Red Display, 24 VAC/VDC, Surface Wall Mount (Sapling SDLG-32S-256-4R)	1,397.72	84.60
		Note: Capability to interface with either Sapling's Elapsed Timer Control Panel Or Sapling Temperature Sensor.		
27 53 13 13-0024	EA	3200 Digital Messaging Wireless Clock, 2.4 GHz, 2.5", Dot Matrix Red Display, 110 Volt, Surface Wall Mount (Sapling SDLG-32S-256-1R)	1,430.20	84.60
		Note: Capability to interface with either Sapling's Elapsed Timer Control Panel Or Sapling Temperature Sensor.		
27 53 13 13-0025	EA	3300 Digital Messaging Wireless Clock, 2.4 GHz, 2.5", Dot Matrix Red Display, 24 VAC/VDC, Surface Wall Mount And Relay Output/Input (Sapling SDLG-33S-256-4R)	1,717.66	84.60
		Note: Capability to interface with either Sapling's Elapsed Timer Control Panel Or Sapling Temperature Sensor.		
27 53 13 13-0026	EA	3300 Digital Messaging Wireless Clock, 2.4 GHz, 2.5", Dot Matrix Red Display, 110 Volt, Surface Wall Mount And Relay Output/Input (Sapling SDLG-33S-256-1R)	1,750.13	84.60
		Note: Capability to interface with either Sapling's Elapsed Timer Control Panel Or Sapling Temperature Sensor.		
27 53 13 13-0027	EA	Short Metal Pole For Ceiling Mount Only For Double/Flag Mount, 8.5", Digital Or Square Analog Clock, Black (Sapling SAB-1BD-01S-0)	184.75	22.56
27 53 13 13-0028	EA	Metal Pole For Double/Flag Mount, Wall Or Ceiling, 13.5", Digital Or Square Analog Clock, Black (Sapling SAB-1BD-00S-0)	184.75	22.56
27 53 13 13-0029	EA	Set-up Charge For Clock Message, Per Clock (Sapling CLK-MSG-SETUP)	33.43	
27 53 13 13-0030	EA	USB Programming Cable + Software For 3200/3300 Digital Clocks (Sapling D-USB485-INTF-1)	268.93	2.82
27 53 13 13-0031	EA	Elapsed Timer Control Panel For 3200/3300 Clock Model (Sapling SBD-ELT-001-0)	537.87	5.64
27 53 13 13-0032	EA	Elapsed Timer Specialty Buttons Kit (Sapling SBD-ELT-BUT-0)	97.58	2.82
27 53 13 13-0033	EA	Elapsed Timer Clear Protective Cover - Set of 2 Covers (Sapling A-ELT-CLR-GUARD-1)	19.52	0.56
27 53 13 13-0034	EA	Temperature Sensor for 3200/3300 Digital Clock Model (Sapling SBD-TEMP-000-0)	121.61	5.64
27 53 13 13-0035		2.4 GHz Wireless Message System/Master Clock And Transmitter (Sapling SMM 3000 Series) *(27 53 13 13)*		
		Note: Includes Sapling standard 2 year "material" warranty and applies to Master Clocks, Analog Clocks, Digital Clocks and Converter Boxes.		
27 53 13 13-0036	EA	Master Clock With 2.4 GHz Transmitter For Time Data And Messages, Rack Mount And Wall Remote Mount Antenna, 8 Programmable Relays/Zones (Sapling SMM-3R0-G008-1)	7,028.85	84.60
27 53 13 13-0037	EA	Master Clock With 2.4 GHz Transmitter And GPS For Time Data And Messages, Rack Mount And Wall Remote Mount Antenna, 8 Programmable Relays/Zones (Sapling SMM-3R0-G108-1)	9,682.84	84.60
27 53 13 13-0038	EA	Message Input Box, 16 Inputs, Rack Mount, For SMM Master Clock (Sapling SMI-000-0016-0)	3,096.78	56.40
27 53 13 13-0039	EA	Wireless Network Repeater, 2.4 GHz, 110 VAC - 230 VAC, with TCP/IP for Campus Environments, Surface Wall Mount (Sapling SMA-1SM-G000-1	1,771.54	56.40
27 53 13 13-0040	EA	NTP Server Upgrade (Sapling SMA-000-SERV-0)	3,343.40	
27 53 13 13-0041	EA	Countdown Feature Upgrade (Sapling SMA-000-CDOW-0)	1,654.98	
27 53 13 13-0042		Clear Polycarbonate Protective Covers For Wireless Clocks (Sapling) *(27 53 13 13)*		
		Note: For applications requiring defense against constant moisture or fine dust, a silicone sealant betwen the cover and wall is recommended.		
27 53 13 13-0043	EA	Clear Polycarbonate Protective Cover For 9" Square And 12" Round Analog Clock (Sapling SAG-CLR-COVR-12)	449.47	14.10
27 53 13 13-0044	EA	Clear Polycarbonate Protective Cover For 2.5" Digital Clock (Sapling SDG-CLR-COVR-25)	449.47	14.10
27 53 13 13-0045		Wire Guards For Wireless Synchronized Clocks (Sapling) *(27 53 13 13)*		
27 53 13 13-0046	EA	Wire Guard For Round Or Square Analog Clocks (Sapling SAG-1200)	247.03	14.10
27 53 13 13-0047	EA	Wire Guard for 2.5" or 4.0" Digital Clocks (Sapling SDG-2017)	345.70	14.10
27 53 13 13-0048		Wireless Synchronized Clock Transmitters *(27 53 13 13)*		
27 53 13 13-0049		Analog, Wireless Synchronized Clocks (Primex Traditional Series) *(27 53 13 13-0048)*		
27 53 13 13-0050	EA	12.5", Battery Operated, Single Sided, Analog, Wireless Synchronized Clock	327.44	28.20
		For >250, Deduct	*-68.07*	
		For >100 To 250, Deduct	*-57.23*	
27 53 13 13-0051	EA	12.5", Battery Operated, Dual Sided, Analog, Wireless Synchronized Clock	598.48	28.20
		For >250, Deduct	*-46.39*	
		For >100 To 250, Deduct	*-38.25*	
27 53 13 13-0052	EA	16", Battery Operated, Single Sided, Analog, Wireless Synchronized Clock	383.52	28.20
		For >250, Deduct	*-80.41*	
		For >100 To 250, Deduct	*-67.32*	
27 53 13 13-0053	EA	12.5", Electric, Single Sided, Analog, Wireless Synchronized Clock	374.17	28.20
		For >250, Deduct	*-78.35*	
		For >100 To 250, Deduct	*-65.64*	
27 53 13 13-0054	EA	12.5", Electric, Dual Sided, Analog, Wireless Synchronized Clock	691.94	28.20
		For >250, Deduct	*-52.93*	
		For >100 To 250, Deduct	*-43.40*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 53 13 13-0055	EA	16", Electric, Single Sided, Analog, Wireless Synchronized Clock	430.25	28.20
		For >250, Deduct	*-64.52*	
		For >100 To 250, Deduct	*-49.56*	
27 53 13 13-0056		**Digital, Wireless Synchronized Clocks (Primex Digital Series)** *(27 53 13 13-0048)*		
27 53 13 13-0057		**4-Digit, Digital, Wireless Synchronized Clocks** *(27 53 13 13-0056)*		
27 53 13 13-0058	EA	2.5", Single Sided, 4-Digit, Red LED Digital, Wireless Synchronized Clock	486.32	28.20
		For Green LED, Add	*42.99*	
		For >100 To 250, Deduct	*-42.83*	
		For >250, Deduct	*-64.33*	
27 53 13 13-0059	EA	2.5", Dual Sided, 4-Digit, Red LED Digital, Wireless Synchronized Clock	916.25	28.20
		For Green LED, Add	*85.99*	
		For >100 To 250, Deduct	*-94.43*	
		For >250, Deduct	*-240.60*	
27 53 13 13-0060	EA	4", Single Sided, 4-Digit, Red LED Digital, Wireless Synchronized Clock	542.40	28.20
		For Green LED, Add	*48.60*	
		For >250, Deduct	*-44.89*	
		For >100 To 250, Deduct	*-30.31*	
27 53 13 13-0061	EA	4", Dual Sided, 4-Digit, Red LED Digital, Wireless Synchronized Clock	1,028.40	28.20
		For Green LED, Add	*97.20*	
		For >100 To 250, Deduct	*-86.20*	
		For >250, Deduct	*-270.88*	
27 53 13 13-0062		**6-Digit, Digital, Wireless Synchronized Clocks** *(27 53 13 13-0056)*		
27 53 13 13-0063	EA	2.5", Single Sided, 6-Digit, Red LED Digital, Wireless Synchronized Clock	542.40	28.20
		For Green LED, Add	*48.60*	
		For >100 To 250, Deduct	*-35.17*	
		For >250, Deduct	*-50.72*	
27 53 13 13-0064	EA	2.5", Dual Sided, 6-Digit, Red LED Digital, Wireless Synchronized Clock	1,028.40	28.20
		For Green LED, Add	*97.20*	
		For >250, Deduct	*-183.40*	
		For >100 To 250, Deduct	*-77.45*	
27 53 13 13-0065	EA	2.5", Flush Mount, 6-Digit, Red LED Digital, Wireless Synchronized Clock	635.86	28.20
		For Green LED, Add	*57.95*	
		For >100 To 250, Deduct	*-28.72*	
		For >250, Deduct	*-43.21*	
27 53 13 13-0066		**Wire Guards For Wireless Synchronized Clocks** *(27 53 13 13-0048)*		
27 53 13 13-0067	EA	18" x 18" Analog Clock Wire Guard For 16" Wireless Synchronized Clocks	168.39	14.10
27 53 13 13-0068	EA	Digital Clock Wire Guard For 2.5" Wireless Synchronized Clocks	74.93	14.10
27 53 13 13-0069	EA	Digital Clock Wire Guard For 4" Wireless Synchronized Clocks	84.28	14.10
27 53 13 13-0070		**Wireless Synchronized Clock Transmitters** *(27 53 13 13-0048)* Note: Includes 16 channel transmitter with daylight savings bypass and time zone switch, GPS receiver, 16' cable and window installation hardware.		
27 53 13 13-0071	EA	Internal Antenna, One Watt GPS Wireless Clock Transmitter (Primex 14000)	3,711.39	84.60
		For Roof Mounted GPS Receiver, Add	*523.02*	
27 53 13 13-0072	EA	External Antenna, One Watt GPS Wireless Clock Transmitter (Primex 14000-E) Note: Includes 100' antenna cable, 29.4" high x 41.5" wide ground plane antenna with direct ground lightning protection.	6,057.27	84.60
		For Roof Mounted GPS Receiver, Add	*757.61*	
27 53 13 13-0073	EA	Repeater, Satellite Transmitter (Primex 14006) Note: Includes 100' antenna cable, 29.4" high x 41.5" wide ground plane antenna with direct ground lightning protection.	3,654.99	56.40
27 53 13 13-0074		**Accessories For Wireless Synchronized Clock Transmitters** *(27 53 13 13-0048)*		
27 53 13 13-0075	EA	External Antenna Mounting Kit For Wireless Synchronized Clock Transmitters	325.50	22.56
27 53 13 13-0076	EA	Transmitter Rack For Wireless Synchronized Clock Transmitters	142.32	22.56
27 53 13 13-0077	EA	Surge Protector And Battery Back Up For Wireless Synchronized Clock Transmitters	220.63	11.28
27 53 13 13-0078	EA	50' GPS Receiver Cable For Wireless Synchronized Clock Transmitters	181.64	28.20
27 53 13 13-0079	EA	100' GPS Receiver Cable For Wireless Synchronized Clock Transmitters	252.83	42.30
27 53 13 13-0080	EA	200' GPS Receiver Cable For Wireless Synchronized Clock Transmitters	374.49	56.40
27 53 13 16		**Wired Clock Systems** *(27 53 13)*		
27 53 13 16-0001		**Wired Self-Corrective Clock Systems** *(27 53 13 16)*		
27 53 13 16-0002		**Wired Self-Corrective Clocks** *(27 53 13 16-0001)*		
27 53 13 16-0003		**Analog, Wired Self-Corrective Clocks (Telecor)** *(27 53 13 16-0002)*		
27 53 13 16-0004		**24 Volt AC, Analog, Wired Self-Corrective Clocks** *(27 53 13 16-0003)*		
27 53 13 16-0005	EA	12", Single Sided, 24 Volt AC, Analog, Wired Self-Corrective Clock, Semi-Flush Mount	277.90	28.20
		For >50 To 100, Deduct	*-17.30*	
		For >100, Deduct	*-26.16*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 53 13 16-0006	EA	12", Dual Sided, 24 Volt AC, Analog, Wired Self-Corrective Clock, Surface Mount	673.25	28.20
		For >50 To 100, Deduct	*-33.11*	
		For >100, Deduct	*-57.79*	
27 53 13 16-0007	EA	16", Single Sided, 24 Volt AC, Analog, Wired Self-Corrective Clock, Semi-Flush Mount	350.80	28.20
		For >50 To 100, Deduct	*-23.16*	
		For >100, Deduct	*-34.94*	
27 53 13 16-0008	EA	16", Dual Sided, 24 Volt AC, Analog, Wired Self-Corrective Clock, Surface Mount	891.95	28.20
		For >50 To 100, Deduct	*-92.00*	
		For >100, Deduct	*-125.42*	
27 53 13 16-0009		**120 Volt AC, Analog, Wired Self-Corrective Clocks** *(27 53 13 16-0003)*		
27 53 13 16-0010	EA	12", Single Sided, 120 Volt AC, Analog, Wired Self-Corrective Clock, Semi-Flush Mount	277.90	28.20
		For >50 To 100, Deduct	*-17.30*	
		For >100, Deduct	*-26.16*	
27 53 13 16-0011	EA	12", Dual Sided, 120 Volt AC, Analog, Wired Self-Corrective Clock, Surface Mount	673.25	28.20
		For >50 To 100, Deduct	*-33.11*	
		For >100, Deduct	*-57.79*	
27 53 13 16-0012	EA	16", Single Sided, 120 Volt AC, Analog, Wired Self-Corrective Clock, Semi-Flush Mount	350.80	28.20
		For >50 To 100, Deduct	*-23.16*	
		For >100, Deduct	*-34.94*	
27 53 13 16-0013	EA	16", Dual Sided, 120 Volt AC, Analog, Wired Self-Corrective Clock, Surface Mount	891.95	28.20
		For >50 To 100, Deduct	*-92.00*	
		For >100, Deduct	*-125.42*	
27 53 13 16-0014		**Accessories For Analog Wired Self-Corrective Clocks** *(27 53 13 16-0003)*		
27 53 13 16-0015	EA	Wire Guards For 12", 15" Or 16" Analog Wired Self-Corrective Clocks	231.48	14.10
27 53 13 16-0016	EA	Back Box For 10", 12" Or 15" Flush Mount Analog Wired Self-Corrective Clocks	56.24	14.10
27 53 13 16-0017	EA	Surface Mounting Rings For 12" Analog Wired Self-Corrective Clocks	72.37	14.10
27 53 13 16-0018	EA	Surface Mounting Rings For 15" Analog Wired Self-Corrective Clocks	89.19	14.10
27 53 13 16-0019	EA	Combination Back Box For Speaker And Clock	160.85	22.56
27 53 13 16-0020		**Digital, Wired Self-Corrective Clocks (Telecor)** *(27 53 13 16-0002)*		
27 53 13 16-0021		**24 Volt AC, Digital, Wired Self-Corrective Clocks** *(27 53 13 16-0020)*		
27 53 13 16-0022	EA	2.5", 24 Volt AC, Digital, Wired Self-Corrective Clock, Flush Mount	345.20	28.20
		For Surface Mount, Add	*57.76*	
		For >50 To 100, Deduct	*-17.33*	
		For >100, Deduct	*-28.88*	
27 53 13 16-0023	EA	4", 24 Volt AC, Digital, Wired Self-Corrective Clock, Flush Mount	535.86	28.20
		For Surface Mount, Add	*95.89*	
		For >50 To 100, Deduct	*-28.77*	
		For >100, Deduct	*-47.95*	
27 53 13 16-0024		**120 Volt AC, Digital, Wired Self-Corrective Clocks** *(27 53 13 16-0020)*		
27 53 13 16-0025	EA	2.5", 120 Volt AC, Digital, Wired Self-Corrective Clock, Flush Mount	345.20	28.20
		For Surface Mount, Add	*57.76*	
		For >50 To 100, Deduct	*-17.33*	
		For >100, Deduct	*-28.88*	
27 53 13 16-0026	EA	4", 120 Volt AC, Digital, Wired Self-Corrective Clock, Flush Mount	535.86	28.20
		For Surface Mount, Add	*95.89*	
		For >50 To 100, Deduct	*-28.77*	
		For >100, Deduct	*-47.95*	
27 53 13 16-0027		**Replacement Modules For 24 Volt AC, Digital, Wired Self-Corrective Clocks** *(27 53 13 16-0020)*		
27 53 13 16-0028	EA	2.5", Replacement Module For 24 Volt AC, Digital, Wired Self-Corrective Clocks	294.04	28.20
		For >50 To 100, Deduct	*-14.26*	
		For >100, Deduct	*-23.76*	
27 53 13 16-0029	EA	4" Replacement Module For 24 Volt AC, Digital, Wired Self-Corrective Clocks	489.59	28.20
		For >50 To 100, Deduct	*-25.99*	
		For >100, Deduct	*-43.32*	
27 53 13 16-0030		**Replacement Modules For 120 Volt AC, Digital, Wired Self-Corrective Clocks** *(27 53 13 16-0020)*		
27 53 13 16-0031	EA	2.5", Replacement Module For 120 Volt AC, Digital, Wired Self-Corrective Clocks	294.04	28.20
		For >50 To 100, Deduct	*-14.26*	
		For >100, Deduct	*-23.76*	
27 53 13 16-0032	EA	4" Replacement Module For 120 Volt AC, Digital, Wired Self-Corrective Clocks	489.59	28.20
		For >50 To 100, Deduct	*-25.99*	
		For >100, Deduct	*-43.32*	
27 53 13 16-0033		**Accessories For Digital Wired Self-Corrective Clocks** *(27 53 13 16-0020)*		
27 53 13 16-0034	EA	Wire Guard For 4" Surface Mount Analog Wired Self-Corrective Clocks	317.00	14.10
27 53 13 16-0035	EA	2.5", Recessed Back Box For Flush Mount Digital Wired Self-Corrective Clocks	73.06	14.10
27 53 13 16-0036	EA	4", Recessed Back Box For Flush Mount Digital Wired Self-Corrective Clocks	102.50	14.10
27 53 13 16-0037	EA	Dual Mounting Kit For Surface Mount Digital Wired Self-Corrective Clocks	276.34	14.10

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
27 53 13 16-0038	EA	4 Gang Extension Ring For Surface Mount Digital Wired Self-Corrective Clocks	75.17	14.10
27 53 13 16-0039		**Wired Self-Corrective Master Clocks** *(27 53 13 16-0001)*		
27 53 13 16-0040		**Wired Self-Corrective Master Clocks** *(27 53 13 16-0039)*		
27 53 13 16-0041	EA	24 Volt AC, Wired Self-Corrective Master Clock, Surface Mount (Telecor 2400-S-24)	3,249.44	225.60
27 53 13 16-0042	EA	120 Volt AC, Wired Self-Corrective Master Clock, Surface Mount (Telecor 2400-S-120)	3,459.73	225.60
27 53 13 16-0043		**Accessories For Wired Self-Corrective Master Clocks** *(27 53 13 16-0039)*		
27 53 13 16-0044	EA	5 Amperes Power Transformer For 24 Volt AC, Wired Self-Corrective Clock Systems (Telecor 2405)	325.20	56.40
27 53 13 16-0045	EA	10 Amperes Power Transformer For 24 Volt AC, Wired Self-Corrective Clock Systems (Telecor 2406)	369.35	56.40
27 53 13 16-0046		**Other Clock And Program Systems** *(27 53 13 16)*		
27 53 13 16-0047	EA	4 Circuit Master Clock And Signal Control (Lathem LTR4-512)	2,066.93	112.80
27 53 13 16-0048	EA	8 Circuit Master Clock And Signal Control (Lathem LTR8-512)	2,467.11	225.60
27 53 13 16-0049	EA	Program Bell (Lathem 906-6)	290.11	56.40
27 53 13 16-0050	EA	Combination Clock And Speaker	653.98	141.01

END OF SECTION 27

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

28 Electronic Safety and Security

Note: Termination costs are included with all safety and security equipment, panel boards, and devices. Terminations are not included with patch panels.

28 05 Common Work Results for Electronic Safety and Security *(28)*

28 05 26 Grounding and Bonding for Electronic Safety and Security *(28 05)*

See CSI section 26 05 26 00-0000 for grounding and bonding.

28 05 53 Identification for Electronic Safety and Security *(28 05)*

See CSI section 26 05 53 00-0000 for identification.

28 08 Commissioning of Electronic Safety and Security *(28)*

See CSI section 01 91 13 00-0001 for commissioning.

28 10 Access Control *(28)*

Note: Includes testing of new devices and certification.

28 15 Integrated Access Control Hardware Devices *(28 10)*

28 15 11 Integrated Credential Readers and Field Entry Management *(28 15)*

28 15 11 13 Keypads *(28 15 11)*

28 15 11 13-0001 Vindicator Security Alarm System *(28 15 11 13)*

28 15 11 13-0002	EA	Switch, Balanced Magnetic Security Door (Vindicator #192-30894-00)	1,635.73	235.19
28 15 11 13-0003	EA	Security Detector, Passive Infrared (Vindicator #316-30812-00)	2,069.72	305.69
28 15 11 13-0004	EA	Premise Security Control Unit (Vindicator #548-32004-01)	11,924.49	670.03
28 15 11 13-0005	EA	Access Manager Security Key Pad (Vindicator #548-31894-01)	5,673.66	571.00
28 15 11 13-0006	EA	ALS Duress Security Switch (Vindicator #192-30810-00)	1,286.60	312.34

28 16 Access Control Interfaces *(28 10)*

28 16 11 Access Control Interfaces to Access Control Hardware *(28 16)*

28 16 11 00-0001 Stand-Alone Access Controls *(28 16 11)*

28 16 11 00-0002 Push Button Controls, Stand-Alone Access Controls *(28 16 11 00-0001)*

28 16 11 00-0003 Interior Mount, Push Button Controls, Stand-Alone Access Controls *(28 16 11 00-0002)*

28 16 11 00-0004	EA	Exit Push Button, Push Button Controls, Interior Stand-Alone Access Controls Note: Controls mount to a standard mullion.	156.79	28.20
28 16 11 00-0005	EA	Exit Push Button, Push Button Controls, Interior Stand-Alone Access Controls Note: Controls mount into a single gang electrical box. Excludes electrical box.	165.16	28.20
28 16 11 00-0006	EA	Three Button, Push Button Controls, Interior Stand-Alone Access Controls For Gate Operators Note: Controls mount into a single gang electrical box. Excludes electrical box.	213.26	28.20

28 16 11 00-0007 Exterior Mount, Push Button Controls, Stand-Alone Access Controls *(28 16 11 00-0002)*

Note: Includes a lockable, gasketed 16 gauge steel enclosure. Excludes mounting posts.

28 16 11 00-0008	EA	Handicap/Push To Open, Push Button Controls, Exterior Stand-Alone Access Controls Note: Controls mount into a single gang electrical box. Excludes electrical box.	201.41	28.20
28 16 11 00-0009	EA	42" High Aluminum Post With Handicap/Push To Open, Push Button Controls, Exterior Stand-Alone Access Controls Note: Includes post, mounting base and push button control. Excludes concrete foundation.	1,003.02	84.60
28 16 11 00-0010	EA	Three Button, Exterior Stand-Alone Access Controls For Gate Operators Note: Includes open, close and stop controls.	338.76	28.20

28 16 11 00-0011 Key Controls, Stand-Alone Access Controls *(28 16 11 00-0001)*

28 16 11 00-0012 Interior Mount, Key Controls, Stand-Alone Access Controls *(28 16 11 00-0011)*

28 16 11 00-0013	EA	Standard Mortise Key, Key Controls, Interior Stand-Alone Access Controls Note: Controls mount into a single gang electrical box. Excludes electrical box.	228.95	28.20

28 16 11 00-0014 Exterior Mount, Key Controls, Stand-Alone Access Controls *(28 16 11 00-0011)*

Note: Includes a lockable NEMA rain resistant steel enclosure. Excludes mounting posts.

28 16 11 00-0015	EA	Postal Or Fire Department Lock Box, Key Controls, Exterior Stand-Alone Access Controls Note: Opens door or gate with a postal or fire department key.	342.87	56.40
28 16 11 00-0016	EA	Standard Mortise Key, Key Controls, Exterior Stand-Alone Access Controls	564.57	56.40
28 16 11 00-0017	EA	Ace Key, Key Controls, Exterior Stand-Alone Access Controls	564.57	56.40
28 16 11 00-0018	EA	Standard Mortise Key And Push Button Intercom, Key Controls, Exterior Stand-Alone Access Controls	882.48	56.40

28 16 11 00-0019 Keypad Controls, Stand-Alone Access Controls *(28 16 11 00-0001)*

28 16 11 00-0020 Interior Mount, Keypad Controls, Stand-Alone Access Controls *(28 16 11 00-0019)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 16 11 00-0021	EA	One Code Memory, Keypad Control, Interior Stand-Alone Access Controls Note: Stores one 4-digit entry code and one 4-digit hold code. Controls mount into a single gang electrical box. Excludes electrical box.	328.30	28.20
28 16 11 00-0022		Exterior Mount, Keypad Controls, Stand-Alone Access Controls *(28 16 11 00-0019)* Note: Includes a surface mounted lockable NEMA rain resistant steel enclosure. Excludes mounting posts.		
28 16 11 00-0023		Keypad Controls, Exterior Stand-Alone Access Controls *(28 16 11 00-0022)*		
28 16 11 00-0024	EA	1000 Code Memory, Keypad Control, Exterior Stand-Alone Access Controls Note: Includes lighted keypad. Stores one thousand 4-digit entry codes and six 5-digit entry codes.	1,375.94	112.80
		For Flush Mount, Add	*258.83*	
28 16 11 00-0025		Keypad Controls With Push Button Intercom, Exterior Stand-Alone Access Controls *(28 16 11 00-0022)* Note: Includes intercom sub-station. Excludes additional receiving intercoms.		
28 16 11 00-0026	EA	1000 Code Memory, Keypad Controls With Push Button Intercom, Exterior Stand-Alone Access Controls Note: Includes lighted keypad. Stores one thousand 4-digit entry codes and six 5-digit entry codes.	1,676.04	126.90
		For Flush Mount, Add	*320.00*	
28 16 11 00-0027		RF Controls, Stand-Alone Access Controls *(28 16 11 00-0001)*		
28 16 11 00-0028		Exterior Mount, RF Controls, Stand-Alone Access Controls *(28 16 11 00-0027)* Note: Includes a lockable NEMA rain resistant steel enclosure. Excludes mounting posts and transmitters.		
28 16 11 00-0029		RF Receivers, RF Controls, Exterior Stand-Alone Access Controls *(28 16 11 00-0028)* Note: Includes a lockable NEMA rain resistant steel enclosure. Excludes mounting posts and transmitters.		
28 16 11 00-0030	EA	50 Code Memory, RF Receiver, RF Controls, Exterior Stand-Alone Access Controls	790.31	112.80
28 16 11 00-0031	EA	100 Code Memory, RF Receiver, RF Controls, Exterior Stand-Alone Access Controls	903.25	112.80
28 16 11 00-0032	EA	250 Code Memory, RF Receiver, RF Controls, Exterior Stand-Alone Access Controls	1,012.01	112.80
28 16 11 00-0033	EA	500 Code Memory, RF Receiver, RF Controls, Exterior Stand-Alone Access Controls	1,129.14	112.80
28 16 11 00-0034	EA	1000 Code Memory, RF Receiver, RF Controls, Exterior Stand-Alone Access Controls	1,237.90	112.80
28 16 11 00-0035	EA	5000 Code Memory, RF Receiver, RF Controls, Exterior Stand-Alone Access Controls	1,355.02	112.80
28 16 11 00-0036	EA	16000 Code Memory, RF Receiver, RF Controls, Exterior Stand-Alone Access Controls	1,463.78	112.80
28 16 11 00-0037		RF Transmitters, RF Controls, Exterior Stand-Alone Access Controls *(28 16 11 00-0028)*		
28 16 11 00-0038	EA	1 Button, RF Transmitter, RF Controls, Exterior Stand-Alone Access Controls	71.11	
		For >40 To 110, Deduct	*-3.56*	
		For >110, Deduct	*-7.11*	
		For Built In Proximity Tags, Add	*14.22*	
28 16 11 00-0039	EA	2 Button, RF Transmitter, RF Controls, Exterior Stand-Alone Access Controls	75.29	
		For >40 To 110, Deduct	*-3.76*	
		For >110, Deduct	*-7.53*	
		For Built In Proximity Tags, Add	*15.06*	
28 16 11 00-0040	EA	3 Button, RF Transmitter, RF Controls, Exterior Stand-Alone Access Controls	79.48	
		For >40 To 110, Deduct	*-3.97*	
		For >110, Deduct	*-7.95*	
		For Built In Proximity Tags, Add	*15.90*	
28 16 11 00-0041		Accessories For RF Receivers, Exterior Stand-Alone Access Controls *(28 16 11 00-0028)*		
28 16 11 00-0042	EA	Coax Antenna Kit For RF Receivers, Exterior Stand-Alone Access Controls Note: Includes 15' of coax cable.	269.59	84.60
28 16 11 00-0043	EA	Antenna Amplifier For RF Receivers, Exterior Stand-Alone Access Controls Note: Includes 20' of coax cable.	587.50	84.60
28 16 11 00-0044	EA	Yagi High-Gain Antenna Kit For RF Receivers, Exterior Stand-Alone Access Controls Note: Includes 15' of coax cable.	528.94	84.60
28 16 11 00-0045		Proximity Card Controls, Stand-Alone Access Controls *(28 16 11 00-0001)*		
28 16 11 00-0046		Exterior Mount, Proximity Card Controls, Stand-Alone Access Controls *(28 16 11 00-0045)* Note: Includes a lockable NEMA rain resistant steel enclosure. Excludes mounting posts.		
28 16 11 00-0047		DKS Proximity Card Controls, Exterior Stand-Alone Access Controls *(28 16 11 00-0046)*		
28 16 11 00-0048		DKS Proximity Card Readers, Exterior Stand-Alone Access Controls *(28 16 11 00-0047)*		
28 16 11 00-0049	EA	DKS Proximity Card Reader, Exterior Stand-Alone Access Controls	1,585.09	112.80
28 16 11 00-0050		AWID Proximity Card Controls, Exterior Stand-Alone Access Controls *(28 16 11 00-0046)*		
28 16 11 00-0051		AWID Proximity Card Readers, Exterior Stand-Alone Access Controls *(28 16 11 00-0050)*		
28 16 11 00-0052	EA	AWID Proximity Card Reader, Exterior Stand-Alone Access Controls	1,731.50	112.80
28 16 11 00-0053		HID Proximity Card Controls, Exterior Stand-Alone Access Controls *(28 16 11 00-0046)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 16 11 00-0054		HID Proximity Card Readers, Exterior Stand-Alone Access Controls *(28 16 11 00-0053)*		
28 16 11 00-0055	EA	HID Proximity Card Reader, Exterior Stand-Alone Access Controls	2,066.14	112.80
28 16 11 00-0056		Magnetic Stripe Card Controls, Stand-Alone Access Controls *(28 16 11 00-0001)*		
28 16 11 00-0057		Interior Mount, Magnetic Stripe Card Controls, Stand-Alone Access Controls *(28 16 11 00-0056)*		
28 16 11 00-0058	EA	Magnetic Stripe Reader, Interior Stand-Alone Access Controls	915.80	112.80
28 16 11 00-0059		Exterior Mount, Magnetic Stripe Card Controls, Stand-Alone Access Controls *(28 16 11 00-0056)* Note: Includes a lockable NEMA rain resistant steel enclosure. Excludes mounting posts.		
28 16 11 00-0060	EA	Magnetic Stripe Reader, Exterior Stand-Alone Access Controls	1,152.01	112.80
28 16 11 00-0061		Other Stand-Alone Access Controls *(28 16 11 00-0001)*		
28 16 11 00-0062	EA	Toggle Switch, Interior Access Controls For Gate Operators Note: Controls mount into a single gang electrical box. Excludes electrical box.	150.52	28.20
28 16 11 00-0063	EA	Request To Exit Motion Detector (Bosch Security Systems DS160)	151.66	22.56
28 16 11 00-0064		Wiegand Output Access Controls *(28 16 11)* Note: Excludes controllers.		
28 16 11 00-0065		Proximity Card Controls, Wiegand Output Access Controls *(28 16 11 00-0064)*		
28 16 11 00-0066		DKS, Proximity Card Controls, Wiegand Output Access Controls *(28 16 11 00-0065)*		
28 16 11 00-0067		DKS, Proximity Cards *(28 16 11 00-0066)*		
28 16 11 00-0068	EA	Clamshell Type, DKS Proximity Card (DKS 170)	11.13	
28 16 11 00-0069	EA	ISO Compliant Graphics Card, DKS Proximity Card (DKS 80)	18.35	
28 16 11 00-0070	EA	DKS Proximity Key Fob (DKS 50)	19.33	
28 16 11 00-0071	EA	Active Tag, DKS Proximity Tag (DKS 150) Note: Battery powered tag to boost signal.	109.32	
28 16 11 00-0072	EA	Active Tag, DKS Proximity Tag (DKS 200) Note: Battery powered tag to boost signal.	142.50	
28 16 11 00-0073		DKS, Proximity Card Readers, Wiegand Output Access Controls *(28 16 11 00-0066)*		
28 16 11 00-0074	EA	Up To 2" Read Range, 12 Volt DC, DKS Proximity Card Reader, Wiegand Output Access Controls (DKS Small)	504.54	141.01
28 16 11 00-0075	EA	Up To 3" Read Range, 12 Volt DC, DKS Proximity Card Reader, Wiegand Output Access Controls (DKS Mullion)	504.54	141.01
28 16 11 00-0076	EA	Up To 4" Read Range, 12 Volt DC, DKS Proximity Card Reader, Wiegand Output Access Controls (DKS Single Gang)	504.54	141.01
28 16 11 00-0077	EA	Up To 30" Read Range, 12 Volt DC, DKS Proximity Card Reader, Wiegand Output Access Controls (DKS) Note: Includes mounting bracket and 12 Volt DC regulated power supply.	1,546.95	141.01
28 16 11 00-0078		AWID, Proximity Card Controls, Wiegand Output Access Controls *(28 16 11 00-0065)*		
28 16 11 00-0079		AWID, Proximity Cards *(28 16 11 00-0078)*		
28 16 11 00-0080	EA	Clamshell Type, AWID Proximity Card (AWID Prox-Linc CS)	9.37	
28 16 11 00-0081	EA	ISO Compliant Graphics Card, AWID Proximity Card (AWID Prox-Linc GR)	14.64	
28 16 11 00-0082	EA	AWID Proximity Key Fob (AWID Prox-Linc KT)	15.62	
28 16 11 00-0083	EA	Windshield Tag For LR 2000 Readers, AWID Proximity Tag	54.66	
28 16 11 00-0084	EA	Metal Mount Tag For LR 2000 Readers, AWID Proximity Tag	54.66	
28 16 11 00-0085		AWID, Proximity Card Readers, Wiegand Output Access Controls *(28 16 11 00-0078)*		
28 16 11 00-0086	EA	Up To 4" Read Range, 5-12 Volt DC, AWID Proximity Card Reader, Wiegand Output Access Controls (AWID SR 2400) Note: For mullion mounting.	633.38	141.01
28 16 11 00-0087	EA	Up To 8" Read Range, 5-12 Volt DC, AWID Proximity Card Reader, Wiegand Output Access Controls (AWID MM 6800) Note: For mullion mounting.	914.48	141.01
28 16 11 00-0088	EA	Up To 8" Read Range, 5-12 Volt DC, AWID Proximity Card Reader, Wiegand Output Access Controls (AWID MM 6820) Note: For single gang electrical box mounting.	914.48	141.01
28 16 11 00-0089	EA	Up To 24" Read Range, 5-12 Volt DC, AWID Proximity Card Reader, Wiegand Output Access Controls (AWID MR 1824) Note: Includes 12 Volt DC regulated power supply.	1,550.86	141.01
28 16 11 00-0090	EA	Up To 11' Read Range, 12 Volt DC, AWID Proximity Card Reader, Wiegand Output Access Controls (AWID LR 2000) Note: Includes mounting bracket and 12 Volt DC regulated power supply.	9,187.43	141.01
28 16 11 00-0091		HID, Proximity Card Controls, Wiegand Output Access Controls *(28 16 11 00-0065)*		
28 16 11 00-0092		HID, Proximity Cards *(28 16 11 00-0091)*		
28 16 11 00-0093	EA	Clamshell Type, HID Proximity Card (HID ProxCard II)	19.78	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 16 11 00-0094	EA	ISO Compliant Graphics Card, HID Proximity Card (HID ISOProx II)	26.81	
28 16 11 00-0095	EA	HID Proximity Key Fob (HID ProxKey II)	27.59	
28 16 11 00-0096		**HID, Proximity Card Readers, Wiegand Output Access Controls** *(28 16 11 00-0091)*		
28 16 11 00-0097	EA	Up To 3" Read Range, 5-16 Volt DC, HID Proximity Card Reader, Wiegand Output Access Controls (HID ProxPoint Plus) Note: For mullion mounting. (HID P/N 6005).	542.24	141.01
28 16 11 00-0098	EA	Up To 5" Read Range, 5-16 Volt DC, HID Proximity Card Reader, Wiegand Output Access Controls (HID ThinLine II) Note: For single gang electrical box mounting. (HID P/N 5395).	647.39	141.01
28 16 11 00-0099	EA	Up To 5" Read Range, 5-16 Volt DC, HID Proximity Card Reader, Wiegand Output Access Controls (HID MiniProx) Note: For mullion mounting. (HID P/N 5365).	726.25	141.01
28 16 11 00-0100	EA	EntryProx Single-Door Proximity Access Control Note: (HID P/N 4045) Stores up to 2,000 users and 1,000 time-stamped transactions 12 position keypad for Pin entry or programming optional use with card/key fob, code only or card plus pin code Wiegand output mode. Continental Instrument CICR2358P.	939.17	141.01
28 16 11 00-0101		**Contactless Smart Card Controls, Wiegand Output Access Controls** *(28 16 11 00-0064)*		
28 16 11 00-0102		**HID, Contactless Smart Cards** *(28 16 11 00-0101)*		
28 16 11 00-0103	EA	2K Bits, Clamshell Type, HID iClass, Contactless Smart Card	17.18	
28 16 11 00-0104	EA	16K Bits, ISO Compliant Graphics Card, HID iClass, Contactless Smart Card	18.75	
28 16 11 00-0105	EA	16K Bits, Contactless Smartcard Key Fob, HID iClass, Contactless Smart Card	24.54	
28 16 11 00-0106	EA	16K Bits, Contactless Smartcard Tag, HID iClass, Contactless Smart Card Note: Battery powered tag to boost signal.	13.28	
28 16 11 00-0107		**HID, Contactless Smart Card Readers, Wiegand Output Access Controls** *(28 16 11 00-0101)*		
28 16 11 00-0108	EA	Up To 3-1/4" Read Range, 5-16 Volt DC, HID iClass Contactless Smart Card Reader, Wiegand Output Access Controls (HID R10) Note: For mullion mounting.	591.82	141.01
28 16 11 00-0109	EA	Up To 4-1/4" Read Range, 5-12 Volt DC, HID iClass Contactless Smart Card Reader, Wiegand Output Access Controls (HID R40) Note: For mullion mounting.	849.50	141.01
28 16 11 00-0110	EA	Up To 4-1/4" Read Range, 5-12 Volt DC, HID iClass Contactless Smart Card Reader With Keypad, Wiegand Output Access Controls (HID RK40) Note: For mullion mounting.	1,429.27	141.01
28 16 11 00-0111		**HID, Contactless Smart Card Programmer, Wiegand Output Access Controls** *(28 16 11 00-0101)*		
28 16 11 00-0112	EA	HID iClass Contactless Smart Card Programmer, Wiegand Output Access Controls (HID CP400) Note: For mullion mounting.	4,690.10	141.01
28 16 11 00-0113		**Call Station Controls, Wiegand Output Access Controls** *(28 16 11 00-0064)* Note: Includes intercom sub-station. Excludes additional receiving intercoms.		
28 16 11 00-0114	EA	Call Station With Entry Keypad, Exterior Wiegand Output Access Controls Note: For mullion mounting.	1,787.90	141.01
28 16 11 00-0115	EA	Call Station With Proximity Card Reader, Exterior Wiegand Output Access Controls Note: For mullion mounting.	1,474.17	141.01
28 16 11 00-0116		**Biometrics Readers, Wiegand Output Access Controls** *(28 16 11 00-0064)*		
28 16 11 00-0117	EA	Palm Reader Recognition System, Biometrics Readers, Wiegand Output Access Controls	7,185.55	112.80
28 16 11 00-0118	EA	CCD Camera, Face Image, Biometrics Readers, Wiegand Output Access Controls	8,784.89	112.80
28 16 11 00-0119	EA	Video Grabber Card For DFR Reader, Biometrics Readers, Wiegand Output Access Controls	3,440.36	112.80
28 16 11 00-0120	EA	Fingerprint Reader, Biometrics Readers, Wiegand Output Access Controls (Bioscrypt V-Pass)	2,357.56	112.80
28 16 11 00-0121	EA	Fingerprint Reader With HID Card Reader, Biometrics Readers, Wiegand Output Access Controls (Bioscrypt V-Prox)	2,633.64	112.80
28 16 11 00-0122	EA	Fingerprint Reader With Contactless Smart Card Reader, Biometrics Readers, Wiegand Output Access Controls (Bioscrypt V-Smart)	2,357.56	112.80
28 16 11 00-0123		**Exterior Mounting Posts For Gate Operator Access Controls** *(28 16 11)* Note: Includes mounting plate for access controls, baked on enamel finish and mounting bolt covers. Excludes concrete pads and electrical connections.		
28 16 11 00-0124		**2" x 2" Steel, Exterior Mounting Posts For Gate Operator Access Controls** *(28 16 11 00-0123)*		
28 16 11 00-0125	EA	44" Tall, Gooseneck Style, Single Mount, 2" x 2" Steel, Exterior Mounting Post For Gate Operator Access Controls Note: Includes a 5" x 5" base plate.	543.50	47.96
28 16 11 00-0126	EA	73" Tall, Gooseneck Style, Dual Mount, 2" x 2" Steel, Exterior Mounting Post For Gate Operator Access Controls Note: Includes an 8" x 8" base plate.	1,037.10	47.96
28 16 11 00-0127	EA	Anchor Post For 2" x 2" Steel, Exterior Mounting Post For Gate Operator Access Controls Note: Includes a 24" in-ground post with matching base plate, conduit access and mounting hardware.	493.30	47.96

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 16 11 00-0128		**4" x 4" Steel, Exterior Mounting Posts For Gate Operator Access Controls** *(28 16 11 00-0123)*		
28 16 11 00-0129	EA	59" Tall, Straight Style, Single Mount, 4" x 4" Steel, Exterior Mounting Post For Vehicular Gate Operator Access Controls Note: Includes an 8" x 8" base plate.	976.80	57.54
28 16 11 00-0130	EA	49" Tall, Offset Style, Single Mount, 4" x 4" Steel, Exterior Mounting Post For Vehicular Gate Operator Access Controls Note: Includes an 8" x 8" base plate and a 14" offset from back of post.	1,160.85	57.54
28 16 11 00-0131	EA	Anchor Post For 4" x 4" Steel, Exterior Mounting Post For Vehicular Gate Operator Access Controls Note: Includes a 24" in-ground post with matching base plate, conduit access and mounting hardware.	721.63	57.54
28 16 11 00-0132		**4" x 8" Steel, Exterior Mounting Posts For Gate Operator Access Controls** *(28 16 11 00-0123)*		
28 16 11 00-0133	EA	59" Tall, Straight Style, Single Mount, 4" x 8" Steel, Exterior Mounting Post For Gate Operator Access Controls Note: Includes a 11" x 13" base plate.	3,134.74	71.93
28 16 11 00-0134	EA	50" Tall, Offset Style, Single Mount, 4" x 8" Steel, Exterior Mounting Post For Gate Operator Access Controls Note: Includes a 10" x 14" base plate and a 14" offset from back of post.	3,281.15	71.93
28 16 11 00-0135	EA	Anchor Post For 4" x 8" Steel, Exterior Mounting Post For Gate Operator Access Controls Note: Includes a 24" in-ground post with matching base plate, conduit access and mounting hardware.	1,377.86	23.98
28 16 11 00-0136	EA	48" Light Tower For 4" x 8" Steel, Exterior Mounting Post For Gate Operator Access Controls	2,172.64	71.93
28 16 11 00-0137		**Access Control Accessories** *(28 16 11)*		
28 16 11 00-0138	EA	6 Volt DC, 12 Volt DC, Or 24 Volt DC, At 4 Amperes, Power Supply/Charger (Altronix SMP-5)	670.78	
28 16 11 00-0139	EA	7 Amperes, 12 Volt, Battery	90.89	
28 16 11 00-0140	EA	18 Amperes, 12 Volt, Battery	202.60	
28 16 11 00-0141	EA	Door Personality Module (Sensormatic RM-4)	732.33	28.20
28 16 11 00-0142	EA	Mini-Alert Door Ajar Sounder (System Sensor PA400)	285.65	56.40
28 16 11 00-0143	EA	Recessed Contact For Steel Doors, Door Monitor Switch (Sentrol 1078C)	81.09	33.84
28 16 11 00-0144	EA	Access Control Systems Power Supply (Altronix AL400ULACMCB)	820.55	22.56
28 16 11 00-0145	EA	Surge Suppressor (Tripp-Lite IBAR4)	123.01	5.65
28 16 11 00-0146	EA	Door Strike Relay (Altronix RBSN-TTL)	79.60	22.56
28 16 11 00-0147	EA	4" Diameter x 74" High, Powder Coated Steel, Burial Mount Gooseneck For Access Control Devices (GNB-1) Note: Set in concrete.	474.11	
28 16 11 00-0148	EA	16-Zone Input, Door Controller Expansion Module With 16" SPI Cable (Kantech KT-MOD-INP16)	689.94	141.01
28 16 11 00-0149		**Access Controllers** *(28 16 11)*		
28 16 11 00-0150		**Microterm Controller** *(28 16 11 00-0149)*		
28 16 11 00-0151	EA	Microterm Stand-Alone One Or Two Door Processing Panel (Continental Instruments CICP1100) Note: Up to 1,000 card capacity. Includes 2 alarm inputs, tamper alarm, and 3 relay outputs.	1,858.63	141.01
28 16 11 00-0152	EA	Microterm PC Board (Continental Instruments CICP1100PCB)	1,359.12	84.60
28 16 11 00-0153	EA	Battery Standby For Microterm (Continental Instruments CICP1100BAT-2) Note: Input 120 Volt AC, output 12 Volt DC to temporarily power the Microterm only.	656.19	
28 16 11 00-0154		**Miniterm Controller** *(28 16 11 00-0149)*		
28 16 11 00-0155	EA	Miniterm Two Reader Processing Panel (Continental Instrument CICP1200) Note: Up to 3,000 card capacity. Includes 8 EOL Class A supervised alarm inputs, temper alarm, and 5 relay outputs. Complete in a lockable steel enclosure with battery standby for memory and system operation.	2,941.05	141.01
28 16 11 00-0156	EA	Miniterm PC Board (Continental Instrument CICP1200PCB)	2,243.83	84.60
28 16 11 00-0157		**Super-2 Controller** *(28 16 11 00-0149)*		
28 16 11 00-0158	EA	Super-Two - Two Reader Processing Panel (Continental Instruments CICP1300) Note: For use with CA3000 V2.0.25 and above. Up to a 125,000 card capacity, 8 EOL supervised alarm inputs, tamper, 5 relay outputs. Support for on-board LAN adapter, 57,600 baud rate, 6 access groups per card-holder and compressed data mode. Complete in a lockable steel enclosure with battery standby for memory and system operation.	2,162.84	141.01
28 16 11 00-0159	EA	Super-Two - PC Board (Continental Instruments CICP1300BD)	1,500.06	84.60
28 16 11 00-0160	EA	Network Interface Board For Super-2 (Continental Instruments CICP1300NETBD) Note: Optional on-board adapter allows for communication over TCP/IP.	398.22	84.60
28 16 11 00-0161		**Smarterm Controller** *(28 16 11 00-0149)*		
28 16 11 00-0162	EA	Smarterm Four Reader Processing Panel (Continental Instrument CICP1400) Note: Card capacity up to 2,500. Includes 16 alarm inputs, tamper alarm, and 9 relay outputs. Complete in a lockable steel enclosure with battery standby for memory and system operation.	6,226.68	169.20
28 16 11 00-0163	EA	Smarterm PC Board (Continental Instrument CICP1400PCB)	4,822.63	84.60
28 16 11 00-0164	EA	Smarterm Memory Board - 256K (Continental Instrument CICP1400MB256-1) Note: Up to 10,000 cardholders.	1,862.14	84.60
28 16 11 00-0165	EA	Smarterm Memory Board - 2MB (Continental Instrument CICP1400MB2-1) Note: Up to 50,000 cardholders.	2,657.34	84.60
28 16 11 00-0166	EA	Smarterm Relay Expander Board (Continental Instrument CICP1400RB) Note: 16 Output relays, 8 alarm inputs.	2,061.48	84.60
28 16 11 00-0167	EA	Smarterm Alarm Expander Board (Continental Instrument CICP1400RB) Note: (Supervised) 16 alarm inputs.	2,061.48	84.60
28 16 11 00-0168		**Superterm-4 Controller** *(28 16 11 00-0149)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 16 11 00-0169	EA	Superterm-4 - Four Reader Processing Panel (Continental Instrument CICP1400UL) Note: 20,000 card capacity, 12 supervised alarm inputs, tamper alarm, and 9 relay outputs. Complete in a painted steel enclosure with 7 AH battery standby for system operation.	5,741.43	169.20
28 16 11 00-0170	EA	Superterm-4 PC Board (Continental Instrument CICP1400ULPCB)	4,741.06	84.60
28 16 11 00-0171		**Superterm-8 Controller** *(28 16 11 00-0149)*		
28 16 11 00-0172	EA	Superterm-8 - Eight Reader Processing Panel (Continental Instrument CICP1800) Note: Up to 20,000 card capacity, 24 supervised alarm inputs, tamper alarm, and 17 relay outputs. Complete in a steel enclosure including 7 AH battery standby for memory and system operation.	7,618.53	282.00
28 16 11 00-0173	EA	Superterm-8 - Eight Reader Processing Panel, Expanded Power (Continental Instrument CICP1800EXP) Note: With expanded power supply. (required if more than 1 relay expander board is used.) Up to 20,000 card capacity, 24 supervised alarm inputs, tamper alarm, and 17 relay outputs. Complete in a steel enclosure including 7 AH battery standby for memory and system operation.	8,281.19	282.00
28 16 11 00-0174	EA	Superterm-8 PC Board (Continental Instrument CICP1800PCB)	6,392.57	84.60
28 16 11 00-0175		**Turbo Superterm-4 Controller** *(28 16 11 00-0149)*		
28 16 11 00-0176	EA	Turbo Superterm-4 - Four Reader Processing Panel (Continental Instrument CICP1400ULT) Note: 20,000 Card capacity, 12 supervised alarm inputs, tamper alarm, and 9 relay outputs. Complete in a painted steel enclosure with 7 AH battery standby for system operation.	5,741.43	169.20
28 16 11 00-0177	EA	Turbo Superterm-4 PC Board (Continental Instrument CICP1400ULTPCB)	4,741.06	84.60
28 16 11 00-0178		**Turbo Superterm-8 Controller** *(28 16 11 00-0149)*		
28 16 11 00-0179	EA	Turbo Superterm-8 - Eight Reader Processing Panel (Continental Instrument CICP1800T) Note: For use with CA3000 V2.0.25 and above. Up to 40,000 card capacity, 24 supervised alarm inputs, tamper alarm, and 17 relay outputs. Complete in a steel enclosure including a 7 AH battery standby for memory and system operation.	7,618.53	282.00
28 16 11 00-0180	EA	Turbo Superterm-8 -Eight Reader Processing Panel, Expanded Power (Continental Instrument CICP1800TEXP) Note: Required if more than one relay expander board is used. Up to 40,000 card capacity, 24 supervised alarm inputs, tamper alarm, and 17 relay outputs. Complete in a steel enclosure including a 7 AH battery standby for memory and system operation.	8,281.19	282.00
28 16 11 00-0181	EA	Turbo Superterm-8 PC Board (Continental Instrument CICP1800TPCB)	6,392.57	84.60
28 16 11 00-0182	EA	Superterm Memory Board - 2MB (Continental Instrument CICP1800MB2) Note: Up to 140,000 cardholders.	2,657.34	84.60
28 16 11 00-0183	EA	Turbo/Superterm-8 Memory Board - 2MB (Continental Instrument CICP1800MB2X2) Note: Up to 140,000 cardholders.	2,233.22	84.60
28 16 11 00-0184	EA	Turbo Superterm-8 Relay Expander Board (Continental Instrument CICP1800RB) Note: 16 Output relays, 8 alarm inputs.	2,063.62	84.60
28 16 11 00-0185	EA	Turbo Superterm-8 Alarm Expander Board (Continental Instrument CICP1800RB) Note: (Supervised) 16 Alarm inputs.	2,063.62	84.60
28 16 11 00-0186	EA	Expanded Power Supply For Superterm Or Turbo Superterm (Continental Instrument CICPEXPPWS)	849.98	
28 16 11 00-0187		**Intelligent Controller** *(28 16 11 00-0149)*		
28 16 11 00-0188	EA	Intelligent Controller With Paired Reader Interface for One Physical Barrier (Mercury Security EP-1501)	1,472.57	84.60
28 16 11 00-0189	EA	Up To 64 Doors, Access Controller (Mercury Security EP-1502)	2,526.60	141.01
28 16 11 00-0190	EA	Single Door Access Control Smart Kit (Keyscan LUNA SDACSKT)	1,957.05	84.60
28 16 11 00-0191		**Access Control Bundled System** *(28 16 11)*		
28 16 11 00-0192	EA	CA 3000 Bundled System, Supports 25 Users (Continental Instrument CA3B250P4O3V0R0) Note: System includes PC, monitor, keyboard, mouse, OS, Card Access 3000 file server software, MS SQL 2000, 1 SQL host license, and security key.	41,928.04	
28 16 11 00-0193		**Magnetic Locks** *(28 16 11)* Note: Excludes access controls.		
28 16 11 00-0194		**Magnetic Door Locks** *(28 16 11 00-0193)*		
28 16 11 00-0195		**300 Lb. Magnetic Door Locks** *(28 16 11 00-0194)*		
28 16 11 00-0196	EA	Single Door, Surface Mount, 300 Lb. Magnetic Door Lock	723.38	112.80
28 16 11 00-0197		**600 Lb. Magnetic Door Locks** *(28 16 11 00-0194)*		
28 16 11 00-0198	EA	600 Lb., Single Door, Surface Mount, Magnetic Door Lock	1,068.48	112.80
		For LED Status Indicator And Signal Relay, Add	*105.36*	
		For LED Status Indicator, Signal Relay And Built-In Delay Timer, Add	*210.72*	
		For Mortise Mount, Deduct	*-168.58*	
28 16 11 00-0199	EA	600 Lb., Dual Doors, Surface Mount, Magnetic Door Lock	1,635.29	112.80
		For LED Status Indicator And Signal Relay, Add	*176.21*	
		For LED Status Indicator, Signal Relay And Built-In Delay Timer, Add	*352.42*	
28 16 11 00-0200		**1,200 Lb. Magnetic Door Locks** *(28 16 11 00-0194)*		
28 16 11 00-0201	EA	1,200 Lb., Single Door, Surface Mount, Magnetic Door Lock	1,120.77	112.80
		For LED Status Indicator And Signal Relay, Add	*205.89*	
		For LED Status Indicator, Signal Relay And Built-In Delay Timer, Add	*268.55*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 16 11 00-0202	EA	Dual Doors, Surface Mount, 1,200 Lb. Magnetic Door Lock	1,748.23	112.80
		For LED Status Indicator And Signal Relay, Add	*350.20*	
		For LED Status Indicator, Signal Relay And Built-In Delay Timer, Add	*456.79*	
28 16 11 00-0203		**2,000 Lb. Shear Lock, Magnetic And Mechanical Locks** *(28 16 11 00-0194)*		
		Note: Includes LED status indicator and built-in signal relay.		
28 16 11 00-0204	EA	Single Door, Mortise Mount, 2,000 Lb. Shear Lock, Magnetic And Mechanical Door Lock	1,177.24	112.80
28 16 11 00-0205		**Magnetic Gate Locks** *(28 16 11 00-0193)*		
28 16 11 00-0206		**600 Lb. Magnetic Gate Locks** *(28 16 11 00-0205)*		
28 16 11 00-0207	EA	600 Lb. Magnetic Gate Lock	861.42	112.80
28 16 11 00-0208		**1,200 Lb. Magnetic Gate Locks** *(28 16 11 00-0205)*		
28 16 11 00-0209	EA	1,200 Lb. Magnetic Gate Lock	1,051.75	112.80
		For LED Status Indicator And Signal Relay, Add	*103.27*	
		For LED Status Indicator, Signal Relay And Built-In Delay Timer, Add	*206.54*	
		For Mortise Mount, Deduct	*-165.23*	
28 16 11 00-0210		**Magnetic Lock Power Supply And Chargers** *(28 16 11 00-0193)*		
		Note: Includes lockable metal enclosure, batteries, battery charger and electronically regulated outputs.		
28 16 11 00-0211	EA	12/24 Volt DC At 1 Ampere, Magnetic Lock Backup Power Supply And Charger	617.92	112.80
28 16 11 00-0212	EA	12/24 Volt DC At 2-1/2 Amperes, Magnetic Lock Backup Power Supply And Charger	807.55	112.80
28 16 11 00-0213	EA	12 Volt DC At 4 Amperes And 24 Volt DC At 3 Amperes, Magnetic Lock Backup Power Supply And Charger	919.10	112.80
28 16 11 00-0214	EA	12/24 Volt DC At 6 Amperes, Magnetic Lock Backup Power Supply And Charger	1,175.66	112.80
28 16 11 00-0215		**Master Door Buzzer Stations** *(28 16 11)*		
28 16 11 00-0216		**Master Stations** *(28 16 11 00-0215)*		
28 16 11 00-0217	EA	Master Stations, 5 Station Intercommunication Equipment	1,192.02	175.97
28 16 11 00-0218	EA	Master Stations, 10 Station Intercommunication Equipment	1,763.28	340.66
28 16 11 00-0219	EA	Master Station, Desk Style Remote Intercommunication Equipment	507.87	87.99
28 16 11 00-0220	EA	Master Station, Flush Wall Remote Intercommunication Equipment	637.35	146.64
28 16 11 00-0221	EA	Sound System Outlet, Protector	156.39	57.42
28 16 11 00-0222	EA	Sound System Microphone Outlet	267.31	117.54
28 16 11 00-0223	EA	Ceiling Or Wall, Sound System Speaker	216.42	57.42
28 16 11 00-0224	EA	Sound System Monitor Panel	650.67	117.54
28 16 11 00-0225	EA	Sound System Volume Control	184.07	57.42
28 16 11 00-0226	EA	250 Watt, Sound System Amplifier	3,037.24	470.04
28 16 11 00-0227	EA	Sound System Cabinet	1,702.07	470.04
28 16 11 00-0228		**Master Door Stations** *(28 16 11 00-0215)*		
28 16 11 00-0229	EA	Master Door Stations, Button Buzzer Type, 25 Station	2,457.28	
		For Intercom Type Master Door Station, Add	*230.60*	
28 16 11 00-0230	EA	Master Door Stations, Button Buzzer Type, 50 Station	4,065.22	
		For Intercom Type Master Door Station, Add	*373.56*	
28 16 11 00-0231	EA	Master Door Stations, Button Buzzer Type, 75 Station	5,563.76	
		For Intercom Type Master Door Station, Add	*484.25*	
28 16 11 00-0232	EA	Master Door Stations, Button Buzzer Type, 100 Station	6,367.09	
		For Intercom Type Master Door Station, Add	*567.26*	
28 16 11 00-0233	EA	Master Door Stations, Button Buzzer Type, 150 Station	7,802.88	
		For Intercom Type Master Door Station, Add	*830.14*	
28 16 11 00-0234	EA	Master Door Stations, Button Buzzer Type, 200 Station	9,206.57	
		For Intercom Type Master Door Station, Add	*1,069.96*	
28 16 11 00-0235	EA	Master Door Stations, Button Buzzer Type, 250 Station	11,609.46	
		For Intercom Type Master Door Station, Add	*1,383.57*	
28 16 11 00-0236	EA	Master Door Stations, Button Buzzer Type, 300 Station	13,833.81	
		For Intercom Type Master Door Station, Add	*1,586.49*	
28 16 11 00-0237	EA	Transformer	172.75	
28 16 11 00-0238	EA	Door Opener	255.25	
28 16 11 00-0239	EA	Buzzer With Door Release And Plate	311.69	
28 16 11 00-0240	EA	Amplifier For Intercom Type Unit	538.12	
28 16 11 00-0241	EA	Speaker With Door Release	222.72	

28 18 Security Access Detection Equipment *(28 10)*

28 18 11 Security Access Metal Detectors *(28 18)*

28 18 11 00-0001	EA	Handheld Scanner (Garrett Super Scanner V)	286.74	28.20
28 18 11 00-0002	EA	Single-Zone, Walk-Through Metal Detector, Complete Unit (Garrett CS 5000)	4,670.17	338.40
28 18 11 00-0003	EA	Multi-Zone, Walk-Through Metal Detector, Complete Unit (Garrett PD 6500I)	7,235.52	451.20

28 20 Video Surveillance *(28)*

Note: Includes testing of new devices and certification.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

28 21 Surveillance Cameras *(28 20)*

28 21 31 Proprietary Surveillance Camera Systems *(28 21)*

Note: Includes programming of equipment, testing and certification of new devices.

28 21 31 00-0001 Closed Circuit Television And Surveillance Systems *(28 21 31)*

28 21 31 00-0002 Cameras And Accessories *(28 21 31 00-0001)*

28 21 31 00-0003 Cameras *(28 21 31 00-0002)*

28 21 31 00-0004 General Use Video Camera *(28 21 31 00-0003)*

28 21 31 00-0005	EA	Video Dome Spectra III, CIR/BW 23x Heavy-Duty, Pendant Note: Environmental clear bubble.	5,156.30	221.93
28 21 31 00-0006	EA	Ipak Enclosed Dust Tight Color Camera, Standard Resolution Lens Note: 3.5-8mm AI shields, wall mount.	899.45	111.09
28 21 31 00-0007	EA	Esprit Image Pak PTZ Camera	4,669.93	222.18
28 21 31 00-0008	EA	UF-LED 30 Degree, 850mm (252 LEDs) Includes Power Supply, 120 Volt AC	1,973.36	111.09
28 21 31 00-0009	EA	Toshiba Surveillix 8 Camera, 1 TB (Terabytes) Network Video Recorder (NVR) - Toshiba NVR8-1000	7,863.32	221.93

28 21 31 00-0010 Camera Power Supply *(28 21 31 00-0003)*

28 21 31 00-0011	EA	100 VA Outdoor Power Supply	364.45	55.54
28 21 31 00-0012	EA	Surge Protector, Isolated Coax Protector For CCTV	143.42	27.42
28 21 31 00-0013	EA	Altronics Power Supply With 8 Fused Outputs	605.19	111.09

28 21 31 00-0014 Miscellaneous Accessories *(28 21 31 00-0002)*

28 21 31 00-0015	EA	8 Channel DVR NTSC/PAL 250 GB With CD-RW	15,091.44	198.35
28 21 31 00-0016	EA	High Resolution Ethernet Video Server, Encoder, 12 Volt DC	2,195.54	222.18
28 21 31 00-0017	EA	High Resolution Ethernet Video Server, With Audio, Encoder, 12 Volt DC	2,508.26	222.18
28 21 31 00-0018	EA	High Resolution Ethernet Video Server, Decoder, 12 Volt DC	1,795.27	222.18
28 21 31 00-0019	EA	High Resolution Ethernet Video Server, With Audio, Decoder, 12 Volt DC	2,032.93	222.18
28 21 31 00-0020	EA	Outdoor Multi-Band Wireless Ethernet Bridge, 4 Inputs Note: 5.3 or 5.8 GHz.	4,171.84	222.18
28 21 31 00-0021	EA	24 dBi Gain, 5.25-5.85 GHz Band, 9 Degree Beamwidth, Patch Antenna	1,820.30	222.18
28 21 31 00-0022	EA	Extreme IR Illuminator, ZXLED850.20	5,931.35	222.18
28 21 31 00-0023	EA	Extreme IR Illuminator, UFLED850.30	2,723.86	111.09
28 21 31 00-0024	EA	Extreme IR Illuminator, EX26LED850M	1,473.01	111.09
28 21 31 00-0025	EA	Smart Sight Wireless Link	7,477.01	111.09
28 21 31 00-0026	EA	S1000 System Including Transmitter And Receiver	8,950.02	221.93
28 21 31 00-0027	EA	S1600e-R Video Decoder	2,160.13	111.09
28 21 31 00-0028	EA	Pole Mount Adapter	359.33	111.09
28 21 31 00-0029	EA	DVR (Digital Video Recorder) - iSCSI, Bosch DVA 12T-12050RA	30,474.26	
28 21 31 00-0030	EA	Encoder - Bosch Encoder VIPX1	1,665.64	
28 21 31 00-0031	EA	UTP (Unshielded Twisted Pair) Transceiver - Network Video Technologies - NVT NV214A-M	136.42	
28 21 31 00-0032	EA	Active Receiver Distribution Amplifier Hub - Network Video Technologies – NV 1672	6,582.91	

28 21 31 00-0033 Camera Mounting *(28 21 31 00-0002)*

28 21 31 00-0034 Camera Wall Mounts *(28 21 31 00-0033)*

28 21 31 00-0035	EA	Parapet Camera Wall Mount, 1.5" Diameter Pipe	628.47	110.96
28 21 31 00-0036	EA	Spectra Wall Mount, Gray	179.72	55.54
28 21 31 00-0037	EA	Spectra Wall Mount Pole Adapter For SWM-GY	144.59	55.54
28 21 31 00-0038	EA	Wall Mount Bracket For Exterior CCTV	480.60	111.09

28 21 31 00-0039 Control Panels *(28 21 31 00-0002)*

28 21 31 00-0040	EA	CCTV Control Panel With Keyboard And Battery Backup, Up To 7 Cameras	39,733.75	
28 21 31 00-0041	EA	CCTV Control Panel With Keyboard And Battery Backup, 7 To 14 Cameras	47,680.50	
28 21 31 00-0042	EA	CCTV Control Panel With Keyboard And Battery Backup, 15 To 20 Cameras	55,627.25	
28 21 31 00-0043	EA	CCTV Control Panel With Keyboard And Battery Backup, >21 Cameras	63,574.00	

28 21 31 00-0044 Closed Circuit Television And Surveillance Systems (Pelco) *(28 21 31)*

28 21 31 00-0045 Cameras And Accessories *(28 21 31 00-0044)*

28 21 31 00-0046 Cameras *(28 21 31 00-0045)*

28 21 31 00-0047 Compact, 1/3" Format Cameras *(28 21 31 00-0046)*

28 21 31 00-0048 High Resolution Color, Compact, 1/3" Format Cameras *(28 21 31 00-0047)*

28 21 31 00-0049	EA	High Resolution Day/Night, Compact, 1/3" Format Camera (Pelco C10DN-6)	685.87	28.25

28 21 31 00-0050 Day/Night, Compact, 1/3" Format Cameras *(28 21 31 00-0047)*

28 21 31 00-0051	EA	High Resolution Color, Compact, 1/3" Format Camera (Pelco C10CH-6)	400.42	28.25

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 21 31 00-0052		Camerapaks *(28 21 31 00-0045)* Note: Includes camera and lens.		
28 21 31 00-0053		Camerapaks *(28 21 31 00-0052)*		
28 21 31 00-0054		High Resolution Color, Camerapaks *(28 21 31 00-0053)*		
28 21 31 00-0055		Fixed Focus, High Resolution Color, Camerapaks *(28 21 31 00-0054)*		
28 21 31 00-0056		Manual Iris, Fixed Focus, High Resolution Color, Camerapaks *(28 21 31 00-0055)*		
28 21 31 00-0057	EA	2.3 mm, Manual Iris, Fixed Focus, High Resolution Color, Camerapak (Pelco C10CH-6F2.3)	524.23	28.25
28 21 31 00-0058	EA	2.8 mm, Manual Iris, Fixed Focus, High Resolution Color, Camerapak (Pelco C10CH-6F2.8)	492.13	28.25
28 21 31 00-0059	EA	4 mm, Manual Iris, Fixed Focus, High Resolution Color, Camerapak (Pelco C10CH-6F4)	477.23	28.25
28 21 31 00-0060	EA	8 mm, Manual Iris, Fixed Focus, High Resolution Color, Camerapak (Pelco C10CH-6F8)	473.79	28.25
28 21 31 00-0061		Direct Drive Auto Iris, Fixed Focus, High Resolution Color, Camerapaks *(28 21 31 00-0055)*		
28 21 31 00-0062	EA	2.3 mm, Direct Drive Auto Iris, Fixed Focus, High Resolution Color, Camerapak (Pelco C10CH-6F2.3A)	572.38	28.25
28 21 31 00-0063	EA	2.8 mm, Direct Drive Auto Iris, Fixed Focus, High Resolution Color, Camerapak (Pelco C10CH-6F2.8A)	524.23	28.25
28 21 31 00-0064	EA	4 mm, Direct Drive Auto Iris, Fixed Focus, High Resolution Color, Camerapak (Pelco C10CH-6F4A)	512.77	28.25
28 21 31 00-0065	EA	8 mm, Direct Drive Auto Iris, Fixed Focus, High Resolution Color, Camerapak (Pelco C10CH-6F8A)	503.60	28.25
28 21 31 00-0066		Varifocal, High Resolution Color, Camerapaks *(28 21 31 00-0054)*		
28 21 31 00-0067		Manual Iris, Varifocal, High Resolution Color, Camerapaks *(28 21 31 00-0066)*		
28 21 31 00-0068	EA	1-3 mm, Manual Iris, Varifocal, High Resolution Color, Camerapak (Pelco C10CH-6V1)	619.38	28.25
28 21 31 00-0069	EA	2.5-6 mm, Manual Iris, Varifocal, High Resolution Color, Camerapak (Pelco C10CH-6V2)	557.48	28.25
28 21 31 00-0070	EA	2.8-12 mm, Manual Iris, Varifocal, High Resolution Color, Camerapak (Pelco C10CH-6V21)	507.04	28.25
28 21 31 00-0071	EA	3-8 mm, Manual Iris, Varifocal, High Resolution Color, Camerapak (Pelco C10CH-6V3)	486.40	28.25
28 21 31 00-0072	EA	5-40 mm, Manual Iris, Varifocal, High Resolution Color, Camerapak (Pelco C10CH-6V5)	563.21	28.25
28 21 31 00-0073		Direct Drive Auto Iris, Varifocal, High Resolution Color, Camerapaks *(28 21 31 00-0066)*		
28 21 31 00-0074	EA	1-3 mm, Direct Drive Auto Iris, Varifocal, High Resolution Color, Camerapak (Pelco C10CH-6V1A)	669.82	28.25
28 21 31 00-0075	EA	2.5-6 mm, Direct Drive Auto Iris, Varifocal, High Resolution Color, Camerapak (Pelco C10CH-6V2A)	627.41	28.25
28 21 31 00-0076	EA	2.8-12 mm, Direct Drive Auto Iris, Varifocal, High Resolution Color, Camerapak (Pelco C10CH-6V21A)	555.18	28.25
28 21 31 00-0077	EA	3-8 mm, Direct Drive Auto Iris, Varifocal, High Resolution Color, Camerapak (Pelco C10CH-6V3A)	494.42	28.25
28 21 31 00-0078	EA	5-40 mm, Direct Drive Auto Iris, Varifocal, High Resolution Color, Camerapak (Pelco C10CH-6V5A)	587.28	28.25
28 21 31 00-0079	EA	5-50 mm, Direct Drive Auto Iris, Varifocal, High Resolution Color, Camerapak (Pelco C10CH-6V50A)	665.24	28.25
28 21 31 00-0080	EA	5.5-82.5 mm, Direct Drive Auto Iris, Varifocal, High Resolution Color, Camerapak (Pelco C10CH-6V55A)	764.98	28.25
28 21 31 00-0081		Infrared Corrected, Direct Drive Auto Iris, Varifocal, High Resolution Color, Camerapaks *(28 21 31 00-0066)*		
28 21 31 00-0082	EA	3-8.5 mm, Infrared Corrected, Direct Drive Auto Iris, Varifocal, High Resolution Color, Camerapak (Pelco C10CH-6R3A)	520.79	28.25
28 21 31 00-0083	EA	7.5-50 mm, Infrared Corrected, Direct Drive Auto Iris, Varifocal, High Resolution Color, Camerapak (Pelco C10CH-6R75A)	625.11	28.25
28 21 31 00-0084		High Resolution Day/Night, Camerapaks *(28 21 31 00-0053)*		
28 21 31 00-0085		Varifocal, High Resolution Day/Night, Camerapaks *(28 21 31 00-0084)*		
28 21 31 00-0086		Direct Drive Auto Iris, Varifocal, High Resolution Day/Night, Camerapaks *(28 21 31 00-0085)*		
28 21 31 00-0087	EA	2.5-6 mm, Direct Drive Auto Iris, Varifocal, High Resolution Day/Night, Camerapak (Pelco C1390H-6V2A)	1,065.33	28.25
28 21 31 00-0088	EA	2.8-12 mm, Direct Drive Auto Iris, Varifocal, High Resolution Day/Night, Camerapak (Pelco C1390H-6V21A)	993.11	28.25
28 21 31 00-0089	EA	3-8 mm, Direct Drive Auto Iris, Varifocal, High Resolution Day/Night, Camerapak (Pelco C1390H-6V3A)	932.35	28.25
28 21 31 00-0090	EA	5-40 mm, Direct Drive Auto Iris, Varifocal, High Resolution Day/Night, Camerapak (Pelco C1390H-6V5A)	1,025.21	28.25
28 21 31 00-0091	EA	5-50 mm, Direct Drive Auto Iris, Varifocal, High Resolution Day/Night, Camerapak (Pelco C1390H-6V50A)	1,103.16	28.25
28 21 31 00-0092	EA	5.5-82.5 mm, Direct Drive Auto Iris, Varifocal, High Resolution Day/Night, Camerapak (Pelco C1390H-6V55A)	1,201.75	28.25
28 21 31 00-0093		Infrared Corrected, Direct Drive Auto Iris, Varifocal, High Resolution Day/Night, Camerapaks *(28 21 31 00-0085)*		
28 21 31 00-0094	EA	3-8.5 mm, Infrared Corrected, Direct Drive Auto Iris, Varifocal, High Resolution Day/Night, Camerapak (Pelco C1390H-6R3A)	958.72	28.25
28 21 31 00-0095	EA	7.5-50 mm, Infrared Corrected, Direct Drive Auto Iris, Varifocal, High Resolution Day/Night, Camerapak (Pelco C1390H-6R75A)	1,063.04	28.25
28 21 31 00-0096		Compact Camerapaks *(28 21 31 00-0052)*		
28 21 31 00-0097		High Resolution Color, Compact Camerapaks *(28 21 31 00-0096)*		
28 21 31 00-0098		DSS, High Resolution Color, Compact Camerapaks *(28 21 31 00-0097)*		
28 21 31 00-0099		Fixed Focus, DSS, High Resolution Color, Camerapaks *(28 21 31 00-0098)*		
28 21 31 00-0100		Manual Iris, Fixed Focus, DSS, High Resolution Color, Camerapaks *(28 21 31 00-0099)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 21 31 00-0101	EA	2.3 mm, Manual Iris, Fixed Focus, DSS, High Resolution Color, Camerapak (Pelco C3751H-2F2.3)	823.44	28.25
28 21 31 00-0102	EA	2.8 mm, Manual Iris, Fixed Focus, DSS, High Resolution Color, Camerapak (Pelco C3751H-2F2.8)	791.34	28.25
28 21 31 00-0103	EA	4 mm, Manual Iris, Fixed Focus, DSS, High Resolution Color, Camerapak (Pelco C3751H-2F4)	775.29	28.25
28 21 31 00-0104	EA	8 mm, Manual Iris, Fixed Focus, DSS, High Resolution Color, Camerapak (Pelco C3751H-2F8)	771.85	28.25
28 21 31 00-0105		Direct Drive Auto Iris, Fixed Focus, DSS, High Resolution Color, Camerapaks *(28 21 31 00-0099)*		
28 21 31 00-0106	EA	2.3 mm, Direct Drive Auto Iris, Fixed Focus, DSS, High Resolution Color, Camerapak (Pelco C3751H-2F2.3A)	870.44	28.25
28 21 31 00-0107	EA	2.8 mm, Direct Drive Auto Iris, Fixed Focus, DSS, High Resolution Color, Camerapak (Pelco C3751H-2F2.8A)	823.44	28.25
28 21 31 00-0108	EA	4 mm, Direct Drive Auto Iris, Fixed Focus, DSS, High Resolution Color, Camerapak (Pelco C3751H-2F4A)	811.98	28.25
28 21 31 00-0109	EA	8 mm, Direct Drive Auto Iris, Fixed Focus, DSS, High Resolution Color, Camerapak (Pelco C3751H-2F8A)	802.81	28.25
28 21 31 00-0110		Varifocal, DSS, High Resolution Color, Camerapaks *(28 21 31 00-0098)*		
28 21 31 00-0111		Manual Iris, Varifocal, DSS, High Resolution Color, Camerapaks *(28 21 31 00-0110)*		
28 21 31 00-0112	EA	1-3 mm, Manual Iris, Varifocal, DSS, High Resolution Color, Camerapak (Pelco C3751H-2V1)	918.59	28.25
28 21 31 00-0113	EA	2.5-6 mm, Manual Iris, Varifocal, DSS, High Resolution Color, Camerapak (Pelco C3751H-2V2)	855.54	28.25
28 21 31 00-0114	EA	2.8-12 mm, Manual Iris, Varifocal, DSS, High Resolution Color, Camerapak (Pelco C3751H-2V21)	806.25	28.25
28 21 31 00-0115	EA	3-8 mm, Manual Iris, Varifocal, DSS, High Resolution Color, Camerapak (Pelco C3751H-2V3)	785.61	28.25
28 21 31 00-0116	EA	5-40 mm, Manual Iris, Varifocal, DSS, High Resolution Color, Camerapak (Pelco C3751H-2V5)	861.27	28.25
28 21 31 00-0117	EA	5-50 mm, Manual Iris, Varifocal, DSS, High Resolution Color, Camerapak (Pelco C3751H-2V50)	910.57	28.25
28 21 31 00-0118	EA	5.5-82.5 mm, Manual Iris, Varifocal, DSS, High Resolution Color, Camerapak (Pelco C3751H-2V55)	1,027.50	28.25
28 21 31 00-0119		Direct Drive Auto Iris, Varifocal, DSS, High Resolution Color, Camerapaks *(28 21 31 00-0110)*		
28 21 31 00-0120	EA	1-3 mm, Direct Drive Auto Iris, Varifocal, DSS, High Resolution Color, Camerapak (Pelco C3751H-2V1A)	967.89	28.25
28 21 31 00-0121	EA	2.5-6 mm, Direct Drive Auto Iris, Varifocal, DSS, High Resolution Color, Camerapak (Pelco C3751H-2V2A)	926.62	28.25
28 21 31 00-0122	EA	2.8-12 mm, Direct Drive Auto Iris, Varifocal, DSS, High Resolution Color, Camerapak (Pelco C3751H-2V21A)	854.39	28.25
28 21 31 00-0123	EA	3-8 mm, Direct Drive Auto Iris, Varifocal, DSS, High Resolution Color, Camerapak (Pelco C3751H-2V3A)	792.49	28.25
28 21 31 00-0124	EA	5-40 mm, Direct Drive Auto Iris, Varifocal, DSS, High Resolution Color, Camerapak (Pelco C3751H-2V5A)	886.49	28.25
28 21 31 00-0125	EA	5-50 mm, Direct Drive Auto Iris, Varifocal, DSS, High Resolution Color, Camerapak (Pelco C3751H-2V50A)	964.45	28.25
28 21 31 00-0126	EA	5.5-82.5 mm, Direct Drive Auto Iris, Varifocal, DSS, High Resolution Color, Camerapak (Pelco C3751H-2V55A)	1,063.04	28.25
28 21 31 00-0127		Infrared Corrected, Direct Drive Auto Iris, Varifocal, DSS, High Resolution Color, Camerapaks *(28 21 31 00-0110)*		
28 21 31 00-0128	EA	3-8.5 mm, Infrared Corrected, Direct Drive Auto Iris, Varifocal, DSS, High Resolution Color, Camerapak (Pelco C3751H-2R3A)	820.00	28.25
28 21 31 00-0129	EA	7.5-50 mm, Infrared Corrected, Direct Drive Auto Iris, Varifocal, DSS, High Resolution Color, Camerapak (Pelco C3751H-2R75A)	924.32	28.25
28 21 31 00-0130		EDR, High Resolution Color, Compact Camerapaks *(28 21 31 00-0097)*		
28 21 31 00-0131		Fixed Focus, EDR, High Resolution Color, Camerapaks *(28 21 31 00-0130)*		
28 21 31 00-0132		Manual Iris, Fixed Focus, EDR, High Resolution Color, Camerapaks *(28 21 31 00-0131)*		
28 21 31 00-0133	EA	2.3 mm, Manual Iris, Fixed Focus, EDR, High Resolution Color, Camerapak (Pelco C3701H-2F2.3)	823.44	28.25
28 21 31 00-0134	EA	2.8 mm, Manual Iris, Fixed Focus, EDR, High Resolution Color, Camerapak (Pelco C3701H-2F2.8)	612.50	28.25
28 21 31 00-0135	EA	4 mm, Manual Iris, Fixed Focus, EDR, High Resolution Color, Camerapak (Pelco C3701H-2F4)	596.45	28.25
28 21 31 00-0136	EA	8 mm, Manual Iris, Fixed Focus, EDR, High Resolution Color, Camerapak (Pelco C3701H-2F8)	593.02	28.25
28 21 31 00-0137		Direct Drive Auto Iris, Fixed Focus, EDR, High Resolution Color, Camerapaks *(28 21 31 00-0131)*		
28 21 31 00-0138	EA	2.3 mm, Direct Drive Auto Iris, Fixed Focus, EDR, High Resolution Color, Camerapak (Pelco C3701H-2F2.3A)	691.61	28.25
28 21 31 00-0139	EA	2.8 mm, Direct Drive Auto Iris, Fixed Focus, EDR, High Resolution Color, Camerapak (Pelco C3701H-2F2.8A)	644.60	28.25
28 21 31 00-0140	EA	4 mm, Direct Drive Auto Iris, Fixed Focus, EDR, High Resolution Color, Camerapak (Pelco C3701H-2F4A)	633.14	28.25
28 21 31 00-0141	EA	8 mm, Direct Drive Auto Iris, Fixed Focus, EDR, High Resolution Color, Camerapak (Pelco C3701H-2F8A)	633.14	28.25
28 21 31 00-0142		Varifocal, EDR, High Resolution Color, Camerapaks *(28 21 31 00-0130)*		
28 21 31 00-0143		Manual Iris, Varifocal, EDR, High Resolution Color, Camerapaks *(28 21 31 00-0142)*		
28 21 31 00-0144	EA	1-3 mm, Manual Iris, Varifocal, EDR, High Resolution Color, Camerapak (Pelco C3701H-2V1)	739.75	28.25
28 21 31 00-0145	EA	2.5-6 mm, Manual Iris, Varifocal, EDR, High Resolution Color, Camerapak (Pelco C3701H-2V2)	676.70	28.25
28 21 31 00-0146	EA	2.8-12 mm, Manual Iris, Varifocal, EDR, High Resolution Color, Camerapak (Pelco C3701H-2V21)	627.41	28.25
28 21 31 00-0147	EA	3-8 mm, Manual Iris, Varifocal, EDR, High Resolution Color, Camerapak (Pelco C3701H-2V3)	606.77	28.25
28 21 31 00-0148	EA	5-40 mm, Manual Iris, Varifocal, EDR, High Resolution Color, Camerapak (Pelco C3701H-2V5)	682.43	28.25
28 21 31 00-0149	EA	5-50 mm, Manual Iris, Varifocal, EDR, High Resolution Color, Camerapak (Pelco C3701H-2V50)	731.73	28.25
28 21 31 00-0150	EA	5.5-82.5 mm, Manual Iris, Varifocal, EDR, High Resolution Color, Camerapak (Pelco C3701H-2V55)	848.66	28.25
28 21 31 00-0151		Direct Drive Auto Iris, Varifocal, EDR, High Resolution Color, Camerapaks *(28 21 31 00-0142)*		
28 21 31 00-0152	EA	1-3 mm, Direct Drive Auto Iris, Varifocal, EDR, High Resolution Color, Camerapak (Pelco C3701H-2V1A)	789.05	28.25
28 21 31 00-0153	EA	2.5-6 mm, Direct Drive Auto Iris, Varifocal, EDR, High Resolution Color, Camerapak (Pelco C3701H-2V2A)	747.78	28.25
28 21 31 00-0154	EA	2.8-12 mm, Direct Drive Auto Iris, Varifocal, EDR, High Resolution Color, Camerapak (Pelco C3701H-2V21A)	674.41	28.25

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 21 31 00-0155	EA	3-8 mm, Direct Drive Auto Iris, Varifocal, EDR, High Resolution Color, Camerapak (Pelco C3701H-2V3A)	613.65	28.25
28 21 31 00-0156	EA	5-40 mm, Direct Drive Auto Iris, Varifocal, EDR, High Resolution Color, Camerapak (Pelco C3701H-2V5A)	707.66	28.25
28 21 31 00-0157	EA	5-50 mm, Direct Drive Auto Iris, Varifocal, EDR, High Resolution Color, Camerapak (Pelco C3701H-2V50A)	785.61	28.25
28 21 31 00-0158	EA	5.5-82.5 mm, Direct Drive Auto Iris, Varifocal, EDR, High Resolution Color, Camerapak (Pelco C3701H-2V55A)	884.20	28.25
28 21 31 00-0159		Infrared Corrected, Direct Drive Auto Iris, Varifocal, EDR, High Resolution Color, Camerapaks *(28 21 31 00-0142)*		
28 21 31 00-0160	EA	3-8.5 mm, Infrared Corrected, Direct Drive Auto Iris, Varifocal, EDR, High Resolution Color, Camerapak (Pelco C3701H-2R3A)	641.16	28.25
28 21 31 00-0161	EA	7.5-50 mm, Infrared Corrected, Direct Drive Auto Iris, Varifocal, EDR, High Resolution Color, Camerapak (Pelco C3701H-2R75A)	745.49	28.25
28 21 31 00-0162		High Resolution Day/Night, Compact Camerapaks *(28 21 31 00-0096)*		
28 21 31 00-0163		Fixed Focus, High Resolution Day/Night, Compact Camerapaks *(28 21 31 00-0162)*		
28 21 31 00-0164		Manual Iris, Fixed Focus, High Resolution Day/Night, Compact Camerapaks *(28 21 31 00-0163)*		
28 21 31 00-0165	EA	8 mm, Manual Iris, Fixed Focus, High Resolution Day/Night, Compact Camerapak (Pelco C10DN-6F8)	759.24	28.25
28 21 31 00-0166		DC-Drive Auto Iris, Fixed Focus, High Resolution Day/Night, Compact Camerapaks *(28 21 31 00-0163)*		
28 21 31 00-0167	EA	2.3 mm, Direct Drive Auto Iris, Fixed Focus, High Resolution Day/Night, Compact Camerapak (Pelco C10DN-6F2.3A)	857.83	28.25
28 21 31 00-0168	EA	2.8 mm, Direct Drive Auto Iris, Fixed Focus, High Resolution Day/Night, Compact Camerapak (Pelco C10DN-6F2.8A)	809.68	28.25
28 21 31 00-0169		Varifocal, High Resolution Day/Night, Compact Camerapaks *(28 21 31 00-0162)*		
28 21 31 00-0170		Manual Iris, Varifocal, High Resolution Day/Night, Compact Camerapaks *(28 21 31 00-0169)*		
28 21 31 00-0171	EA	2.8-12 mm, Manual Iris, Varifocal, High Resolution Day/Night, Compact Camerapak (Pelco C10DN-6V21)	792.49	28.25
28 21 31 00-0172	EA	3-8 mm, Manual Iris, Varifocal, High Resolution Day/Night, Compact Camerapak (Pelco C10DN-6V3)	771.85	28.25
28 21 31 00-0173	EA	5-50 mm, Manual Iris, Varifocal, High Resolution Day/Night, Compact Camerapak (Pelco C10DN-6V50)	897.96	28.25
28 21 31 00-0174		Direct Drive Auto Iris, Varifocal, High Resolution Day/Night, Compact Camerapaks *(28 21 31 00-0169)*		
28 21 31 00-0175	EA	2.5-6 mm, Direct Drive Auto Iris, Varifocal, High Resolution Day/Night, Compact Camerapak (Pelco C10DN-6V2A)	912.86	28.25
28 21 31 00-0176	EA	2.8-12 mm, Direct Drive Auto Iris, Varifocal, High Resolution Day/Night, Compact Camerapak (Pelco C10DN-6V21A)	840.64	28.25
28 21 31 00-0177	EA	3-8 mm, Direct Drive Auto Iris, Varifocal, High Resolution Day/Night, Compact Camerapak (Pelco C10DN-6V3A)	779.88	28.25
28 21 31 00-0178	EA	5-40 mm, Direct Drive Auto Iris, Varifocal, High Resolution Day/Night, Compact Camerapak (Pelco C10DN-6V5A)	872.74	28.25
28 21 31 00-0179	EA	5-50 mm, Direct Drive Auto Iris, Varifocal, High Resolution Day/Night, Compact Camerapak (Pelco C10DN-6V50A)	950.69	28.25
28 21 31 00-0180	EA	5.5-82.5 mm, Direct Drive Auto Iris, Varifocal, High Resolution Day/Night, Compact Camerapak (Pelco C10DN-6V55A)	1,050.43	28.25
28 21 31 00-0181		Infrared Corrected, Direct Drive Auto Iris, Varifocal, High Resolution Day/Night, Compact Camerapaks *(28 21 31 00-0169)*		
28 21 31 00-0182	EA	3-8.5 mm, Infrared Corrected, Direct Drive Auto Iris, Varifocal, High Resolution Day/Night, Compact Camerapak (Pelco C10DN-6R3A)	806.25	28.25
28 21 31 00-0183	EA	7.5-50 mm, Infrared Corrected, Direct Drive Auto Iris, Varifocal, High Resolution Day/Night, Compact Camerapak (Pelco C10DN-6R75A)	910.57	28.25
28 21 31 00-0184		Camera Systems *(28 21 31 00-0045)*		
28 21 31 00-0185		Camera Dome Systems *(28 21 31 00-0184)*		
28 21 31 00-0186		Spectra®, Pan/Tilt Camera Dome Systems *(28 21 31 00-0185)*		
28 21 31 00-0187		Spectra®, Pan/Tilt Camera Dome Systems *(28 21 31 00-0186)* Note: Includes dome drive, camera, lens, back box, clear or smoked lower dome and mounting hardware.		
28 21 31 00-0188		Spectra® IV, Pan/Tilt Camera Dome Systems *(28 21 31 00-0187)*		
28 21 31 00-0189		Black And White, Spectra® IV, Pan/Tilt Camera Dome Systems *(28 21 31 00-0188)*		
28 21 31 00-0190	EA	22X, Surface Mount, Black And White, Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD4M22-SMB)	3,351.74	169.50
28 21 31 00-0191	EA	22X, In-Ceiling Mount, Black And White, Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD4M22-F)	3,821.76	169.50
28 21 31 00-0192	EA	22X, Pendant Mount, Black And White, Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD4M22-PB)	4,032.70	169.50
28 21 31 00-0193	EA	22X, Environmental Pendant Mount, Black And White, Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD4M22-PG-E)	5,610.15	169.50
28 21 31 00-0194		Color, Spectra® IV, Pan/Tilt Camera Dome Systems *(28 21 31 00-0188)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 21 31 00-0195	EA	16X, Surface Mount, Color, Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD4TC-SMB)	2,818.66	169.50
28 21 31 00-0196	EA	16X, In-Ceiling Mount, Color, Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD4TC-F)	3,055.97	169.50
28 21 31 00-0197	EA	16X, Pendant Mount, Color, Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD4TC-PB)	3,268.05	169.50
28 21 31 00-0198	EA	16X, Environmental In-Ceiling Mount, Color, Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD4TC-F-E)	3,389.57	169.50
28 21 31 00-0199	EA	16X, Environmental Pendant Mount, Color, Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD4TC-PG-E)	3,389.57	169.50
28 21 31 00-0200	EA	22X, Surface Mount, Color, Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD4C22-SMB)	3,553.51	169.50
28 21 31 00-0201	EA	22X, In-Ceiling Mount, Color, Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD4C22-F)	4,024.68	169.50
28 21 31 00-0202	EA	22X, Pendant Mount, Color, Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD4C22-PB)	4,236.76	169.50
28 21 31 00-0203	EA	22X, Environmental In-Ceiling Mount, Color, Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD4C22-F-E)	4,358.28	169.50
28 21 31 00-0204	EA	22X, Environmental Pendant Mount, Color, Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD4C22-PG-E)	4,358.28	169.50
28 21 31 00-0205		**Color/Black And White, Spectra® IV, Pan/Tilt Camera Dome Systems** *(28 21 31 00-0188)*		
28 21 31 00-0206	EA	23X, Surface Mount, Color/Black And White, Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD4CBW-SMB)	4,141.61	169.50
28 21 31 00-0207	EA	23X, In-Ceiling Mount, Color/Black And White, Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD4CBW-F)	4,612.78	169.50
28 21 31 00-0208	EA	23X, Pendant Mount, Color/Black And White, Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD4CBW-PB)	4,824.86	169.50
28 21 31 00-0209	EA	23X, Environmental In-Ceiling Mount, Color/Black And White, Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD4CBW-F-E)	4,946.38	169.50
28 21 31 00-0210	EA	23X, Environmental Pendant Mount, Color/Black And White, Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD4CBW-PG-E)	4,946.38	169.50
28 21 31 00-0211		**Day/Night, Spectra® IV, Pan/Tilt Camera Dome Systems** *(28 21 31 00-0188)*		
28 21 31 00-0212	EA	18X, Surface Mount, Day/Night, Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD418-SMB)	3,756.42	169.50
28 21 31 00-0213	EA	18X, In-Ceiling Mount, Day/Night, Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD418-F)	3,994.87	169.50
28 21 31 00-0214	EA	18X, Pendant Mount, Day/Night, Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD418-PB)	4,205.81	169.50
28 21 31 00-0215	EA	18X, Environmental In-Ceiling Mount, Day/Night, Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD418-F-E)	4,327.33	169.50
28 21 31 00-0216	EA	18X, Environmental Pendant Mount, Day/Night, Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD418-PG-E)	4,327.33	169.50
28 21 31 00-0217	EA	35X, Surface Mount, Day/Night, Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD435-SMB)	4,527.95	169.50
28 21 31 00-0218	EA	35X, In-Ceiling Mount, Day/Night, Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD435-F)	4,902.82	169.50
28 21 31 00-0219	EA	35X, Pendant Mount, Day/Night, Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD435-PB)	5,113.76	169.50
28 21 31 00-0220	EA	35X, Environmental In-Ceiling Mount, Day/Night, Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD435-F-E)	5,235.27	169.50
28 21 31 00-0221	EA	35X, Environmental Pendant Mount, Day/Night, Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD435-PG-E)	5,235.27	169.50
28 21 31 00-0222		**Heavy-Duty Spectra® IV, Pan/Tilt Camera Dome Systems** *(28 21 31 00-0187)*		
28 21 31 00-0223		**Color, Heavy-Duty Spectra® IV, Pan/Tilt Camera Dome Systems** *(28 21 31 00-0222)*		
28 21 31 00-0224	EA	16X, In-Ceiling Mount, Color, Heavy-Duty Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD4TC-HF)	3,675.02	169.50
		For Protective Lower Dome Cage, Add	*34.65*	
28 21 31 00-0225	EA	16X, Pendant Mount, Color, Heavy-Duty Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD4TC-HP)	3,879.08	169.50
		For Protective Lower Dome Cage, Add	*34.65*	
28 21 31 00-0226	EA	16X, Environmental Pendant Mount, Color, Heavy-Duty Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD4TC-HPE)	4,041.87	169.50
		For Protective Lower Dome Cage, Add	*34.65*	
28 21 31 00-0227	EA	22X, In-Ceiling Mount, Color, Heavy-Duty Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD4C22-HF)	4,572.66	169.50
		For Protective Lower Dome Cage, Add	*34.65*	
28 21 31 00-0228	EA	22X, Pendant Mount, Color, Heavy-Duty Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD4C22-HP)	4,776.71	169.50
		For Protective Lower Dome Cage, Add	*34.65*	
28 21 31 00-0229	EA	22X, Environmental Pendant Mount, Color, Heavy-Duty Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD4C22-HPE)	4,940.65	169.50
		For Protective Lower Dome Cage, Add	*34.65*	
28 21 31 00-0230		**Day/Night, Heavy-Duty Spectra® IV, Pan/Tilt Camera Dome Systems** *(28 21 31 00-0222)*		
28 21 31 00-0231	EA	18X, In-Ceiling Mount, Day/Night, Heavy-Duty Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD418-HF)	4,612.78	169.50
		For Protective Lower Dome Cage, Add	*34.65*	
28 21 31 00-0232	EA	18X, Pendant Mount, Day/Night, Heavy-Duty Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD418-HP)	4,816.84	169.50
		For Protective Lower Dome Cage, Add	*34.65*	
28 21 31 00-0233	EA	18X, Environmental Pendant Mount, Day/Night, Heavy-Duty Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD418-HPE)	4,980.77	169.50
		For Protective Lower Dome Cage, Add	*34.65*	
28 21 31 00-0234	EA	35X, In-Ceiling Mount, Day/Night, Heavy-Duty Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD435-HF)	5,450.80	169.50
		For Protective Lower Dome Cage, Add	*34.65*	
28 21 31 00-0235	EA	35X, Pendant Mount, Day/Night, Heavy-Duty Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD435-HP)	5,653.71	169.50
		For Protective Lower Dome Cage, Add	*34.65*	
28 21 31 00-0236	EA	35X, Environmental Pendant Mount, Day/Night, Heavy-Duty Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD435-HPE)	5,817.65	169.50
		For Protective Lower Dome Cage, Add	*34.65*	
28 21 31 00-0237		**Pressurized Spectra® IV, Pan/Tilt Camera Dome Systems** *(28 21 31 00-0187)*		
28 21 31 00-0238		**Day/Night, Pressurized Spectra® IV, Pan/Tilt Camera Dome Systems** *(28 21 31 00-0237)*		
28 21 31 00-0239	EA	18X, Environmental Pendant Mount, Day/Night, Pressurized Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD418-PRE)	6,118.00	169.50
28 21 31 00-0240	EA	35X, Environmental Pendant Mount, Day/Night, Pressurized Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD435-PRE)	6,956.02	169.50

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 21 31 00-0241		Stainless Steel Spectra® IV, Pan/Tilt Camera Dome Systems *(28 21 31 00-0187)*		
28 21 31 00-0242		Black And White, Stainless Steel Spectra® IV, Pan/Tilt Camera Dome Systems *(28 21 31 00-0241)*		
28 21 31 00-0243	EA	22X, Environmental Pendant Mount, Black And White, Stainless Steel Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD4M22-PSGE)	5,313.23	169.50
28 21 31 00-0244		Color, Stainless Steel Spectra® IV, Pan/Tilt Camera Dome Systems *(28 21 31 00-0241)*		
28 21 31 00-0245	EA	16X, Environmental Pendant Mount, Color, Stainless Steel Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD4TC-PSGE)	4,618.51	169.50
28 21 31 00-0246	EA	22X, Environmental Pendant Mount, Color, Stainless Steel Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD4C22-PSGE)	5,517.29	169.50
28 21 31 00-0247		Color/Black And White, Stainless Steel Spectra® IV, Pan/Tilt Camera Dome Systems *(28 21 31 00-0241)*		
28 21 31 00-0248	EA	23X, Environmental Pendant Mount, Color/Black And White, Stainless Steel Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD4CBW-PSGE)	6,105.39	169.50
28 21 31 00-0249		Day/Night, Stainless Steel Spectra® IV, Pan/Tilt Camera Dome Systems *(28 21 31 00-0241)*		
28 21 31 00-0250	EA	18X, Environmental Pendant Mount, Day/Night, Stainless Steel Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD418-PSGE)	5,557.41	169.50
28 21 31 00-0251	EA	35X, Environmental Pendant Mount, Day/Night, Stainless Steel Spectra® IV, Pan/Tilt Camera Dome System (Pelco SD435-PSGE)	6,394.28	169.50
28 21 31 00-0252		Miniature Spectra®, Mini Pan/Tilt Camera Dome Systems *(28 21 31 00-0187)*		
28 21 31 00-0253		Color, Miniature Spectra®, Mini Pan/Tilt Camera Dome Systems *(28 21 31 00-0252)*		
28 21 31 00-0254	EA	10X, In-Ceiling Mount, Color, Miniature Spectra®, Mini Pan/Tilt Camera Dome System (Pelco SD4-B)	2,101.02	169.50
28 21 31 00-0255		Spectra® IP Network, Pan/Tilt Camera Dome Systems *(28 21 31 00-0186)* Note: Includes simultaneous IP and analog video and control, dome drive, camera, lens, back box, clear or smoked lower dome and mounting hardware.		
28 21 31 00-0256		Spectra® IV IP Network, Pan/Tilt Camera Dome Systems *(28 21 31 00-0255)*		
28 21 31 00-0257		Color, Spectra® IV IP Network, Pan/Tilt Camera Dome Systems *(28 21 31 00-0256)*		
28 21 31 00-0258	EA	16X, In-Ceiling Mount, Color, Spectra® IV IP Network, Pan/Tilt Camera Dome System (Pelco SD4NTC-F)	3,912.33	169.50
28 21 31 00-0259	EA	16X, Pendant Mount, Color, Spectra® IV IP Network, Pan/Tilt Camera Dome System (Pelco SD4NTC-PB)	4,124.41	169.50
28 21 31 00-0260	EA	16X, Environmental In-Ceiling Mount, Color, Spectra® IV IP Network, Pan/Tilt Camera Dome System (Pelco SD4NTC-F-E)	4,245.93	169.50
28 21 31 00-0261	EA	16X, Environmental Pendant Mount, Color, Spectra® IV IP Network, Pan/Tilt Camera Dome System (Pelco SD4NTC-PG-E)	4,245.93	169.50
28 21 31 00-0262	EA	22X, In-Ceiling Mount, Color, Spectra® IV IP Network, Pan/Tilt Camera Dome System (Pelco SD4NC22-F1)	4,881.04	169.50
28 21 31 00-0263	EA	22X, Pendant Mount, Color, Spectra® IV IP Network, Pan/Tilt Camera Dome System (Pelco SD4NC22-PB-1)	5,093.12	169.50
28 21 31 00-0264	EA	22X, Environmental In-Ceiling Mount, Color, Spectra® IV IP Network, Pan/Tilt Camera Dome System (Pelco SD4NC22-F-E1)	5,214.64	169.50
28 21 31 00-0265	EA	22X, Environmental Pendant Mount, Color, Spectra® IV IP Network, Pan/Tilt Camera Dome System (Pelco SD4NC22-PG-E1)	5,214.64	169.50
28 21 31 00-0266		Color/Black And White, Spectra® IV IP Network, Pan/Tilt Camera Dome Systems *(28 21 31 00-0256)*		
28 21 31 00-0267	EA	23X, In-Ceiling Mount, Color/Black And White, Spectra® IV IP Network, Pan/Tilt Camera Dome System (Pelco SD4NCBW-F1)	5,469.14	169.50
28 21 31 00-0268	EA	23X, Pendant Mount, Color/Black And White, Spectra® IV IP Network, Pan/Tilt Camera Dome System (Pelco SD4NCBW-PB-1)	5,681.22	169.50
28 21 31 00-0269	EA	23X, Environmental In-Ceiling Mount, Color/Black And White, Spectra® IV IP Network, Pan/Tilt Camera Dome System (Pelco SD4NCBW-F-E1)	5,802.74	169.50
28 21 31 00-0270	EA	23X, Environmental Pendant Mount, Color/Black And White, Spectra® IV IP Network, Pan/Tilt Camera Dome System (Pelco SD4NCBW-PG-E1)	5,802.74	169.50
28 21 31 00-0271		Heavy-Duty Spectra® IV IP Network, Pan/Tilt Camera Dome Systems *(28 21 31 00-0255)*		
28 21 31 00-0272		Color, Heavy-Duty Spectra® IV IP Network, Pan/Tilt Camera Dome Systems *(28 21 31 00-0271)*		
28 21 31 00-0273	EA	16X, In-Ceiling Mount, Color, Heavy-Duty Spectra® IV IP Network, Camera Dome System (Pelco SD4NTC-HF1)	4,531.38	169.50
		For Protective Lower Dome Cage, Add	*34.65*	
28 21 31 00-0274	EA	16X, Pendant Mount, Color, Heavy-Duty Spectra® IV IP Network, Camera Dome System (Pelco SD4NTC-HP1)	4,735.44	169.50
		For Protective Lower Dome Cage, Add	*34.65*	
28 21 31 00-0275	EA	16X, Environmental Pendant Mount, Color, Heavy-Duty Spectra® IV IP Network, Camera Dome System (Pelco SD4NTC-HPE1)	4,898.23	169.50
		For Protective Lower Dome Cage, Add	*34.65*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 21 31 00-0276	EA	22X, In-Ceiling Mount, Color, Heavy-Duty Spectra® IV IP Network, Camera Dome System (Pelco SD4NC22-HF1)	5,429.02	169.50
		For Protective Lower Dome Cage, Add	*34.65*	
28 21 31 00-0277	EA	22X, Pendant Mount, Color, Heavy-Duty Spectra® IV IP Network, Camera Dome System (Pelco SD4NC22-HP1)	5,633.08	169.50
		For Protective Lower Dome Cage, Add	*34.65*	
28 21 31 00-0278	EA	22X, Environmental Pendant Mount, Color, Heavy-Duty Spectra® IV IP Network, Camera Dome System (Pelco SD4NC22-HPE1)	5,797.01	169.50
		For Protective Lower Dome Cage, Add	*34.65*	
28 21 31 00-0279		**Day/Night, Heavy-Duty Spectra® IV IP Network, Pan/Tilt Camera Dome Systems** *(28 21 31 00-0271)*		
28 21 31 00-0280	EA	18X, In-Ceiling Mount, Day/Night, Heavy-Duty Spectra® IV IP Network, Camera Dome System (Pelco SD4N18-HF1)	5,469.14	169.50
		For Protective Lower Dome Cage, Add	*34.65*	
28 21 31 00-0281	EA	18X, Pendant Mount, Day/Night, Heavy-Duty Spectra® IV IP Network, Camera Dome System (Pelco SD4N18-HP1)	5,673.20	169.50
		For Protective Lower Dome Cage, Add	*34.65*	
28 21 31 00-0282	EA	18X, Environmental Pendant Mount, Day/Night, Heavy-Duty Spectra® IV IP Network, Camera Dome System (Pelco SD4N18-HPE1)	5,837.13	169.50
		For Protective Lower Dome Cage, Add	*34.65*	
28 21 31 00-0283	EA	35X, In-Ceiling Mount, Day/Night, Heavy-Duty Spectra® IV IP Network, Camera Dome System (Pelco SD4N35-HF1)	6,307.16	169.50
		For Protective Lower Dome Cage, Add	*34.65*	
28 21 31 00-0284	EA	35X, Pendant Mount, Day/Night, Heavy-Duty Spectra® IV IP Network, Camera Dome System (Pelco SD4N35-HP1)	6,510.07	169.50
		For Protective Lower Dome Cage, Add	*34.65*	
28 21 31 00-0285	EA	35X, Environmental Pendant Mount, Day/Night, Heavy-Duty Spectra® IV IP Network, Camera Dome System (Pelco SD4N35-HPE1)	6,674.01	169.50
		For Protective Lower Dome Cage, Add	*34.65*	
28 21 31 00-0286		**Stainless Steel Spectra® IV IP Network, Pan/Tilt Camera Dome Systems** *(28 21 31 00-0255)*		
28 21 31 00-0287		**Color, Stainless Steel Spectra® IV IP Network, Camera Dome Systems** *(28 21 31 00-0286)*		
28 21 31 00-0288	EA	16X, Environmental Pendant Mount, Color, Stainless Steel Spectra® IV IP Network, Camera Dome System (Pelco SD4NTC-PSGE1)	5,474.87	169.50
28 21 31 00-0289	EA	22X, Environmental Pendant Mount, Color, Stainless Steel Spectra® IV IP Network, Camera Dome System (Pelco SD4NC22-PSGE1)	6,373.65	169.50
28 21 31 00-0290		**Color/Black And White, Stainless Steel Spectra® IV IP Network, Camera Dome Systems** *(28 21 31 00-0286)*		
28 21 31 00-0291	EA	23X, Environmental Pendant Mount, Color/Black And White, Stainless Steel Spectra® IV IP Network, Camera Dome System (Pelco SD4N35-PSGE1)	6,961.75	169.50
28 21 31 00-0292		**Day/Night, Stainless Steel Spectra® IV IP Network, Camera Dome Systems** *(28 21 31 00-0286)*		
28 21 31 00-0293	EA	18X, Environmental Pendant Mount, Day/Night, Stainless Steel Spectra® IV IP Network, Camera Dome System (Pelco SD4N18-PSGE1)	6,413.77	169.50
28 21 31 00-0294	EA	35X, Environmental Pendant Mount, Day/Night, Stainless Steel Spectra® IV IP Network, Camera Dome System (Pelco SD4N35-PSGE1)	7,250.65	169.50
28 21 31 00-0295		**Miniature Spectra® IP Network, Mini Pan/Tilt Camera Dome Systems** *(28 21 31 00-0255)*		
28 21 31 00-0296		**Color, Miniature Spectra® IP Network, Mini Camera Dome Systems** *(28 21 31 00-0295)*		
28 21 31 00-0297	EA	10X, In-Ceiling Mount, Color, Miniature Spectra® IP Network, Black Mini Camera Dome System (Pelco SD4N-W1)	2,653.58	169.50
28 21 31 00-0298		**Spectra®, Pan/Tilt Dome Drives** *(28 21 31 00-0186)*		
		Note: Includes dome drive, camera and lens.		
28 21 31 00-0299	EA	10X, Color Camera, Spectra® Mini Dome Drive (Pelco DD4)	1,958.54	141.25
28 21 31 00-0300	EA	10X, Color Camera, Spectra® IP Network, Mini Dome Drive (Pelco DD4N)	2,508.81	141.25
28 21 31 00-0301	EA	22X, Black And White Camera, Spectra® IV Dome Drive (Pelco DD4M22)	3,188.62	141.25
28 21 31 00-0302	EA	16X, Color Camera, Spectra® IV Dome Drive (Pelco DD4TC16)	2,493.91	141.25
28 21 31 00-0303	EA	22X, Color Camera, Spectra® IV Dome Drive (Pelco DD4C22)	3,391.54	141.25
28 21 31 00-0304	EA	18X, Day/Night Camera, Spectra® IV Dome Drive (Pelco DD4CBW18)	3,431.66	141.25
28 21 31 00-0305	EA	23X, Day/Night Camera, Spectra® IV Dome Drive (Pelco DD4CBW23)	3,979.64	141.25
28 21 31 00-0306	EA	35X, Day/Night Camera, Spectra® IV Dome Drive (Pelco DD4CBW35)	4,269.68	141.25
28 21 31 00-0307	EA	35X, Color/Black And White Camera, Spectra® IV Horizon Dome Drive (Pelco DD4H35)	4,269.68	141.25
28 21 31 00-0308		**Accessories For Spectra® Pan/Tilt Camera Dome Systems** *(28 21 31 00-0186)*		
28 21 31 00-0309	EA	Upgrade To Chrome Lower Dome (Pelco Spectra)	161.64	
28 21 31 00-0310	EA	Upgrade To Gold Lower Dome (Pelco Spectra)	210.94	
28 21 31 00-0311	EA	Wall Mount For Spectra® Systems (Pelco IWM-BK)	170.40	14.13
28 21 31 00-0312	EA	24 Volt Out, Wall Mount For Spectra® Systems (Pelco IWM24-BK)	437.51	14.13

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 21 31 00-0313	EA	Wall Arm Mount For Spectra® Systems (Pelco IDM4018)	165.82	14.13
28 21 31 00-0314	EA	Wall Arm Mount With Feed Through For Stainless Steel Spectra® IV Systems (Pelco IDM4012SS)	294.77	14.13
28 21 31 00-0315	EA	Pole Mount Adapter For Spectra® Systems (Pelco PA402)	107.57	8.40
28 21 31 00-0316		Camclosure®, Camera Dome Systems *(28 21 31 00-0185)*		
28 21 31 00-0317		Camclosure® IS Integrated, Camera Dome Systems *(28 21 31 00-0316)*		
28 21 31 00-0318		Camclosure® IS Integrated, Camera Dome Systems *(28 21 31 00-0317)*		
28 21 31 00-0319		High Resolution Color, Camclosure® IS Integrated, Camera Dome Systems *(28 21 31 00-0318)*		
28 21 31 00-0320	EA	12 mm, Indoor Surface/In-Ceiling Mount, High Resolution Color, Camclosure® IS Integrated, Camera Dome System (Pelco IS90-CH12)	745.97	169.50
28 21 31 00-0321	EA	9-22 mm, Indoor Surface/In-Ceiling Mount, High Resolution Color, Camclosure® IS Integrated, Camera Dome System (Pelco IS90-CHV22)	814.76	169.50
28 21 31 00-0322	EA	12 mm, Environmental Surface Mount, High Resolution Color, Camclosure® IS Integrated, Camera Dome System (Pelco IS110-CH12)	912.20	169.50
28 21 31 00-0323	EA	12 mm, Environmental In-Ceiling Mount, High Resolution Color, Camclosure® IS Integrated, Camera Dome System (Pelco IS150-CH12)	912.20	169.50
28 21 31 00-0324		Wide Dynamic Range Color, Camclosure® IS Integrated, Camera Dome Systems *(28 21 31 00-0318)*		
28 21 31 00-0325	EA	9-22 mm, Indoor Surface/In-Ceiling Mount, Wide Dynamic Range Color, Camclosure® IS Integrated, Camera Dome System (Pelco IS90B-CWV22)	924.81	169.50
28 21 31 00-0326	EA	9-22 mm, Environmental Surface Mount, Wide Dynamic Range Color, Camclosure® IS Integrated, Camera Dome System (Pelco IS111-CWV22)	1,014.23	169.50
28 21 31 00-0327	EA	9-22 mm, Environmental In-Ceiling Mount, Wide Dynamic Range Color, Camclosure® IS Integrated, Camera Dome System (Pelco IS151-CWV22)	1,014.23	169.50
28 21 31 00-0328		Day/Night, Camclosure® IS Integrated, Camera Dome Systems *(28 21 31 00-0318)*		
28 21 31 00-0329	EA	9-22 mm, Indoor Surface/In-Ceiling Mount, Day/Night, Camclosure® IS Integrated, White Camera Dome System (Pelco IS90-DNV22)	1,069.26	169.50
28 21 31 00-0330	EA	9-22 mm, Environmental Surface Mount, Day/Night, Camclosure® IS Integrated, Camera Dome System (Pelco IS111-DNV22)	1,290.51	169.50
28 21 31 00-0331	EA	9-22 mm, Environmental In-Ceiling Mount, Day/Night, Camclosure® IS Integrated, Camera Dome System (Pelco IS151-DNV22)	1,290.51	169.50
28 21 31 00-0332		Wide Dynamic Range Day/Night, Camclosure® IS Integrated, Camera Dome Systems *(28 21 31 00-0318)*		
28 21 31 00-0333	EA	9-22 mm, Indoor Surface/In-Ceiling Mount, Wide Dynamic Range Day/Night, Camclosure® IS Integrated, Camera Dome System (Pelco IS90-DWV22)	1,174.73	169.50
28 21 31 00-0334	EA	9-22 mm, Environmental In-Ceiling Mount, Wide Dynamic Range Day/Night, Camclosure® IS Integrated, Camera Dome System (Pelco IS151-DWV22)	1,316.88	169.50
28 21 31 00-0335		Camclosure® IS Integrated, Bullet Style Camera Systems *(28 21 31 00-0317)*		
28 21 31 00-0336		High Resolution Color, Camclosure® IS Integrated, Bullet Style Camera Systems *(28 21 31 00-0335)*		
28 21 31 00-0337	EA	3.6 mm, Wall/Ceiling Mount, High Resolution Color, Camclosure® IS Integrated, Bullet Style Camera System (Pelco IS310-CH3.6)	849.63	113.00
28 21 31 00-0338		Wide Dynamic Range Color, Camclosure® IS Integrated, Bullet Style Camera Systems *(28 21 31 00-0335)*		
28 21 31 00-0339	EA	9-22 mm, Wall/Ceiling Mount, Wide Dynamic Range Color, Camclosure® IS Integrated, Bullet Style Camera System (Pelco IS310-CWV22)	979.17	113.00
28 21 31 00-0340		Day/Night, Camclosure® IS Integrated, Bullet Style Camera Systems *(28 21 31 00-0335)*		
28 21 31 00-0341	EA	9-22 mm, Wall/Ceiling Mount, Day/Night, Camclosure® IS Integrated, Bullet Style Camera System (Pelco IS310-DNV22)	1,082.35	113.00
28 21 31 00-0342		Wide Dynamic Range Day/Night, Camclosure® IS Integrated, Bullet Style Camera Systems *(28 21 31 00-0335)*		
28 21 31 00-0343	EA	9-22 mm, Wall/Ceiling Mount, Wide Dynamic Range Day/Night, Camclosure® IS Integrated, Bullet Style Camera System (Pelco IS310-DWV22)	1,133.94	113.00
28 21 31 00-0344		Camclosure® IS Integrated Cameras *(28 21 31 00-0317)*		
28 21 31 00-0345	EA	12 mm, High Resolution Color, Camclosure® IS Integrated Camera (Pelco IS-CH12)	585.96	113.00
28 21 31 00-0346	EA	9-22 mm, High Resolution Color, Camclosure® IS Integrated Camera (Pelco IS-CHV22)	585.96	113.00
28 21 31 00-0347	EA	9-22 mm, Wide Dynamic Range Color, Camclosure® IS Integrated Camera (Pelco IS-CWV22)	687.99	113.00
28 21 31 00-0348	EA	9-22 mm, Day/Night, Camclosure® IS Integrated Camera (Pelco IS-DNV22)	964.27	113.00

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 21 31 00-0349	EA	9-22 mm, Wide Dynamic Range Day/Night, Camclosure® IS Integrated Camera (Pelco IS-DWV22)	990.64	113.00
28 21 31 00-0350		Camclosure® ICS Integrated, Camera Dome Systems *(28 21 31 00-0316)*		
28 21 31 00-0351		Camclosure® ICS Integrated, Camera Dome Systems *(28 21 31 00-0350)*		
28 21 31 00-0352		Standard Resolution Color, Camclosure® ICS Integrated, Camera Dome Systems *(28 21 31 00-0351)*		
28 21 31 00-0353	EA	12 mm, Indoor Surface/In-Ceiling Mount, Standard Resolution Color, Camclosure® ICS Integrated, Camera Dome System (Pelco ICS090B-CA12)	632.48	169.50
28 21 31 00-0354	EA	12 mm, UTP, Indoor Surface/In-Ceiling Mount, Standard Resolution Color, Camclosure® ICS Integrated, Camera Dome System (Pelco ICS090B-CA12T)	681.77	169.50
28 21 31 00-0355	EA	12 mm, Environmental Surface Mount, Standard Resolution Color, Camclosure® ICS Integrated, Camera Dome System (Pelco ICS110-CA12)	878.95	169.50
28 21 31 00-0356	EA	12 mm, Environmental In-Ceiling Mount, Standard Resolution Color, Camclosure® ICS Integrated, Camera Dome System (Pelco ICS150-CA12)	878.95	169.50
28 21 31 00-0357		High Resolution Color, Camclosure® ICS Integrated, Camera Dome Systems *(28 21 31 00-0351)*		
28 21 31 00-0358	EA	3–9 mm, Environmental In-Ceiling Mount, High Resolution Color, Camclosure® ICS Integrated, Camera Dome System (Pelco ICS151-CDV39A)	1,100.21	169.50
28 21 31 00-0359		Camclosure® ICS Integrated, Bullet Style Camera Systems *(28 21 31 00-0350)*		
28 21 31 00-0360		Standard Resolution, Camclosure® ICS Integrated, Bullet Style Camera Systems *(28 21 31 00-0359)*		
28 21 31 00-0361	EA	12 mm, Wall/Ceiling Mount, Standard Resolution, Camclosure® ICS Integrated, Bullet Style Camera System (Pelco ICS310-CA12)	765.94	113.00
28 21 31 00-0362		Camclosure® ICS Integrated, Wedge Style Camera Systems *(28 21 31 00-0350)*		
28 21 31 00-0363		High Resolution Color, Camclosure® ICS Integrated, Wedge Style Camera Systems *(28 21 31 00-0362)*		
28 21 31 00-0364	EA	9-22 mm, High Resolution, Camclosure® ICS Integrated, Wedge Style Camera System (Pelco IS210-CHV22)	1,014.23	169.50
28 21 31 00-0365		Wide Dynamic Range Color, Camclosure® ICS Integrated, Wedge Style Camera Systems *(28 21 31 00-0362)*		
28 21 31 00-0366	EA	9-22 mm, Wide Dynamic Range, Camclosure® ICS Integrated, Wedge Style Camera System (Pelco IS210-CWV22)	1,117.41	169.50
28 21 31 00-0367		Day/Night, Camclosure® ICS Integrated, Wedge Style Camera Systems *(28 21 31 00-0362)*		
28 21 31 00-0368	EA	9-22 mm, Day/Night, Camclosure® ICS Integrated, Wedge Style Camera System (Pelco IS210-DNV22)	1,246.95	169.50
28 21 31 00-0369		Wide Dynamic Range Day/Night, Camclosure® ICS Integrated, Wedge Style Camera Systems *(28 21 31 00-0362)*		
28 21 31 00-0370	EA	9-22 mm, Wide Dynamic Range Day/Night, Camclosure® ICS Integrated, Wedge Style Camera System (Pelco IS210-DWV22)	1,298.54	169.50
28 21 31 00-0371		Camclosure® IP Network, Camera Dome Systems *(28 21 31 00-0316)*		
28 21 31 00-0372		Camclosure® IP Network, Camera Dome Systems *(28 21 31 00-0371)*		
28 21 31 00-0373		High Resolution Color, Camclosure® IP Network, Camera Dome Systems *(28 21 31 00-0372)*		
28 21 31 00-0374	EA	3-9.5 mm, Environmental Surface Mount, High Resolution Color, Camclosure® IP Network, Camera Dome System (Pelco IP111-CHV9)	1,867.15	169.50
28 21 31 00-0375	EA	9-22 mm, Environmental Surface Mount, High Resolution Color, Camclosure® IP Network, Camera Dome System (Pelco IP111-CHV22)	1,867.15	169.50
28 21 31 00-0376		Wide Dynamic Range Color, Camclosure® IP Network, Camera Dome Systems *(28 21 31 00-0372)*		
28 21 31 00-0377	EA	3-9.5 mm, Environmental Surface Mount, Wide Dynamic Range Color, Camclosure® IP Network, Camera Dome System (Pelco IP111-CWV9)	2,009.30	169.50
28 21 31 00-0378	EA	9-22 mm, Environmental Surface Mount, Wide Dynamic Range Color, Camclosure® IP Network, Camera Dome System (Pelco IP111-CWV22)	2,009.30	169.50
28 21 31 00-0379		Day/Night, Camclosure® IP Network, Camera Dome Systems *(28 21 31 00-0372)*		
28 21 31 00-0380	EA	3-9.5 mm, Environmental Surface Mount, Day/Night, Camclosure® IP Network, Camera Dome System (Pelco IP111-DNV9)	2,228.27	169.50

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 21 31 00-0381	EA	9-22 mm, Environmental Surface Mount, Day/Night, Camclosure® IP Network, Camera Dome System (Pelco IP111-DNV22)	2,228.27	169.50
28 21 31 00-0382		Wide Dynamic Range Day/Night, Camclosure® IP Network, Camera Dome Systems *(28 21 31 00-0372)*		
28 21 31 00-0383	EA	3-9.5 mm, Environmental Surface Mount, Wide Dynamic Range Day/Night, Camclosure® IP Network, Camera Dome System (Pelco IP110-DWV9)	2,383.03	169.50
28 21 31 00-0384	EA	9-22 mm, Environmental Surface Mount, Wide Dynamic Range Day/Night, Camclosure® IP Network, Camera Dome System (Pelco IP110-DWV22)	2,383.03	169.50
28 21 31 00-0385		Accessories For Camclosure® Camera Dome Systems *(28 21 31 00-0316)*		
28 21 31 00-0386	EA	4S Gangbox Adapter Plate For ICS110 Camclosure® Systems (Pelco ICS110-AP)	37.59	8.48
28 21 31 00-0387	EA	4S Adapter Plate For ICS310 Camclosure® Systems (Pelco ICS310-AP)	37.59	8.48
28 21 31 00-0388	EA	Sun Shield For ICS310 Camclosure® Systems (Pelco ICS310-SS)	48.89	14.13
28 21 31 00-0389	EA	Conduit Adapter For ICS310 Camclosure® Systems (Pelco ICS310-COND)	80.98	14.13
28 21 31 00-0390	EA	2' x 2' Ceiling Panel For ICS150 Camclosure® Systems (Pelco ICS150-P)	85.73	8.48
28 21 31 00-0391	EA	Pendant Mount Adapter For Camclosure® ICS110 Systems (Pelco ICS110-PG)	80.98	14.13
28 21 31 00-0392	EA	Corner Mount Adapter For ICS200 Camclosure® Systems (Pelco ICS210-CM)	103.91	14.13
28 21 31 00-0393	EA	Smoked, Surface Mount, Dome For Camclosure® ICS Systems (Pelco ICS-DO110A)	281.19	28.25
28 21 31 00-0394	EA	Clear, Surface Mount, Dome For Camclosure® ICS Systems (Pelco ICS-DO111A)	281.19	28.25
28 21 31 00-0395	EA	Smoked, In-Ceiling Mount, Dome For Camclosure® ICS Systems (Pelco ICS-DO150A)	281.19	28.25
28 21 31 00-0396	EA	Clear, In-Ceiling Mount, Dome For Camclosure® ICS Systems (Pelco ICS-DO151A)	281.19	28.25
28 21 31 00-0397	EA	Pendant Mount Adapter For Camclosure® IP Systems (Pelco IP110-P)	98.18	14.13
28 21 31 00-0398	EA	Smoked Lower Dome For Surface Mount Camclosure® IP Systems (Pelco IP110-LD)	108.09	28.25
28 21 31 00-0399	EA	Clear Lower Dome For Surface Mount Camclosure® IP Systems (Pelco IP111-LD)	108.09	28.25
28 21 31 00-0400	EA	Smoked Lower Dome For Surface Mount Camclosure® IS Systems (Pelco IS110-LD)	108.09	28.25
28 21 31 00-0401	EA	Clear Lower Dome For Surface Mount Camclosure® IS Systems (Pelco IS111-LD)	108.09	28.25
28 21 31 00-0402	EA	Smoked Lower Dome For Ceiling Mount Camclosure® IS Systems (Pelco IS150-LD)	108.09	28.25
28 21 31 00-0403	EA	Clear Lower Dome For Ceiling Mount Camclosure® IS Systems (Pelco IS151-LD)	108.09	28.25
28 21 31 00-0404	EA	Ceiling Mount Enclosure Only, Environmental, Camclosure® IS Systems (Pelco IS150-ENC)	315.98	38.58
28 21 31 00-0405	EA	Black Pendant Mount For Indoor Camclosure® IS Systems (Pelco IS90B-P)	68.37	14.13
28 21 31 00-0406	EA	Black Pendant Wall Mount For Indoor Camclosure® IS Systems (Pelco IS90B-PW)	119.96	14.13
28 21 31 00-0407	EA	White Pendant Mount For Indoor Camclosure® IS Systems (Pelco IS90-P)	68.37	14.13
28 21 31 00-0408	EA	White Pendant Wall Mount For Indoor Camclosure® IS Systems (Pelco IS90-PW)	119.96	14.13
28 21 31 00-0409	EA	Surface Mount Enclosure Only, Environmental, IP Camclosure® (Pelco IP110-ENC)	1,737.61	169.50
28 21 31 00-0410		Pan/Tilt Camera Systems *(28 21 31 00-0184)*		
28 21 31 00-0411		Esprit® CBZ, Pan/Tilt Camera Systems *(28 21 31 00-0410)*		
		Note: Includes powder coated aluminum pan/tilt enclosure, receiver, camera, lens, built in heater, window defroster/defogger, sun shroud, insulation blanket, 24V power supply and mounting hardware.		
28 21 31 00-0412		EDR, High Resolution Color, Esprit® CBZ, Pan/Tilt Camera Systems *(28 21 31 00-0411)*		
28 21 31 00-0413		Pedestal Mount, EDR, High Resolution Color, Esprit® CBZ, Pan/Tilt Camera Systems *(28 21 31 00-0412)*		
28 21 31 00-0414	EA	10X, Pedestal Mount, EDR, High Resolution Color, Esprit® CBZ, Pan/Tilt Camera System (Pelco ES3012-2CBZ10N)	4,994.36	254.25
28 21 31 00-0415	EA	20X, Pedestal Mount, EDR, High Resolution Color, Esprit® CBZ, Pan/Tilt Camera System (Pelco ES3012-2CBZ20N)	5,683.35	254.25
28 21 31 00-0416	EA	30X, Pedestal Mount, EDR, High Resolution Color, Esprit® CBZ, Pan/Tilt Camera System (Pelco ES3012-2CBZ30N)	6,638.30	254.25
28 21 31 00-0417	EA	10X, Preset Positioning, Pedestal Mount, EDR, High Resolution Color, Esprit® CBZ, Pan/Tilt Camera System (Pelco ES3012-2CBZ10PN)	5,142.25	254.25
28 21 31 00-0418	EA	20X, Preset Positioning, Pedestal Mount, EDR, High Resolution Color, Esprit® CBZ, Pan/Tilt Camera System (Pelco ES3012-2CBZ20PN)	5,862.19	254.25
28 21 31 00-0419	EA	30X, Preset Positioning, Pedestal Mount, EDR, High Resolution Color, Esprit® CBZ, Pan/Tilt Camera System (Pelco ES3012-2CBZ30PN)	6,817.14	254.25
28 21 31 00-0420		Wall Mount, EDR, High Resolution Color, Esprit® CBZ, Pan/Tilt Camera Systems *(28 21 31 00-0412)*		
28 21 31 00-0421	EA	10X, Wall Mount, EDR, High Resolution Color, Esprit® CBZ, Pan/Tilt Camera System (Pelco ES3012-2CBZ10W)	5,041.37	254.25
28 21 31 00-0422	EA	20X, Wall Mount, EDR, High Resolution Color, Esprit® CBZ, Pan/Tilt Camera System (Pelco ES3012-2CBZ20W)	5,730.35	254.25
28 21 31 00-0423	EA	30X, Wall Mount, EDR, High Resolution Color, Esprit® CBZ, Pan/Tilt Camera System (Pelco ES3012-2CBZ30W)	6,685.30	254.25
28 21 31 00-0424	EA	10X, Preset Positioning, Wall Mount, EDR, High Resolution Color, Esprit® CBZ, Pan/Tilt Camera System (Pelco ES3012-2CBZ10PW)	5,190.40	254.25
28 21 31 00-0425	EA	20X, Preset Positioning, Wall Mount, EDR, High Resolution Color, Esprit® CBZ, Pan/Tilt Camera System (Pelco ES3012-2CBZ20PW)	5,909.19	254.25
28 21 31 00-0426	EA	30X, Preset Positioning, Wall Mount, EDR, High Resolution Color, Esprit® CBZ, Pan/Tilt Camera System (Pelco ES3012-2CBZ30PW)	6,864.14	254.25
28 21 31 00-0427		Esprit® CLZ, Pan/Tilt Camera Systems *(28 21 31 00-0410)*		
28 21 31 00-0428		DSS, High Resolution Color, Esprit® CLZ, Pan/Tilt Camera Systems *(28 21 31 00-0427)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 21 31 00-0429		Pedestal Mount, DSS, High Resolution Color, Esprit® CLZ, Pan/Tilt Camera Systems *(28 21 31 00-0428)*		
28 21 31 00-0430	EA	10X, Pedestal Mount, DSS, High Resolution Color, Esprit® CLZ, Pan/Tilt Camera System (Pelco ES3012-2CLZ10N)	5,173.20	254.25
28 21 31 00-0431	EA	20X, Pedestal Mount, DSS, High Resolution Color, Esprit® CLZ, Pan/Tilt Camera System (Pelco ES3012-2CLZ20N)	5,862.19	254.25
28 21 31 00-0432	EA	30X, Pedestal Mount, DSS, High Resolution Color, Esprit® CLZ, Pan/Tilt Camera System (Pelco ES3012-2CLZ30N)	6,817.14	254.25
28 21 31 00-0433	EA	10X, Preset Positioning, Pedestal Mount, DSS, High Resolution Color, Esprit® CLZ, Pan/Tilt Camera System (Pelco ES3012-2CLZ10PN)	5,321.09	254.25
28 21 31 00-0434	EA	20X, Preset Positioning, Pedestal Mount, DSS, High Resolution Color, Esprit® CLZ, Pan/Tilt Camera System (Pelco ES3012-2CLZ20PN)	6,041.03	254.25
28 21 31 00-0435	EA	30X, Preset Positioning, Pedestal Mount, DSS, High Resolution Color, Esprit® CLZ, Pan/Tilt Camera System (Pelco ES3012-2CLZ30PN)	6,995.98	254.25
28 21 31 00-0436		Wall Mount, DSS, High Resolution Color, Esprit® CLZ, Pan/Tilt Camera Systems *(28 21 31 00-0428)*		
28 21 31 00-0437	EA	10X, Wall Mount, DSS, High Resolution Color, Esprit® CLZ, Pan/Tilt Camera System (Pelco ES3012-2CLZ10W)	5,220.20	254.25
28 21 31 00-0438	EA	20X, Wall Mount, DSS, High Resolution Color, Esprit® CLZ, Pan/Tilt Camera System (Pelco ES3012-2CLZ20W)	5,909.19	254.25
28 21 31 00-0439	EA	30X, Wall Mount, DSS, High Resolution Color, Esprit® CLZ, Pan/Tilt Camera System (Pelco ES3012-2CLZ30W)	6,864.14	254.25
28 21 31 00-0440	EA	10X, Preset Positioning, Wall Mount, DSS, High Resolution Color, Esprit® CLZ, Pan/Tilt Camera System (Pelco ES3012-2CLZ10PW)	5,369.24	254.25
28 21 31 00-0441	EA	20X, Preset Positioning, Wall Mount, DSS, High Resolution Color, Esprit® CLZ, Pan/Tilt Camera System (Pelco ES3012-2CLZ20PW)	6,088.03	254.25
28 21 31 00-0442	EA	30X, Preset Positioning, Wall Mount, DSS, High Resolution Color, Esprit® CLZ, Pan/Tilt Camera System (Pelco ES3012-2CLZ30PW)	7,042.98	254.25
28 21 31 00-0443		Esprit® AJZ, Pan/Tilt Camera Systems *(28 21 31 00-0410)*		
28 21 31 00-0444		High Resolution Color, Esprit® AJZ, Pan/Tilt Camera Systems *(28 21 31 00-0443)*		
28 21 31 00-0445		Pedestal Mount, High Resolution Color, Esprit® AJZ, Pan/Tilt Camera Systems *(28 21 31 00-0444)*		
28 21 31 00-0446	EA	6 x 10, Pedestal Mount, High Resolution Color, Esprit® AJZ, Pan/Tilt Camera System (Pelco ES3012-2AJZ10N)	4,873.99	254.25
28 21 31 00-0447	EA	5.6 x 20, Pedestal Mount, High Resolution Color, Esprit® AJZ, Pan/Tilt Camera System (Pelco ES3012-2AJZ20N)	5,562.98	254.25
28 21 31 00-0448	EA	5.5 x 30, Pedestal Mount, High Resolution Color, Esprit® AJZ, Pan/Tilt Camera System (Pelco ES3012-2AJZ30N)	6,517.93	254.25
28 21 31 00-0449	EA	6 x 10, Preset Positioning, Pedestal Mount, High Resolution Color, Esprit® AJZ, Pan/Tilt Camera System (Pelco ES3012-2AJZ10PN)	5,023.02	254.25
28 21 31 00-0450	EA	5.6 x 20, Preset Positioning, Pedestal Mount, High Resolution Color, Esprit® AJZ, Pan/Tilt Camera System (Pelco ES3012-2AJZ20PN)	5,741.82	254.25
28 21 31 00-0451	EA	5.5 x 30, Preset Positioning, Preset Positioning, Pedestal Mount, High Resolution Color, Esprit® AJZ, Pan/Tilt Camera System (Pelco ES3012-2AJZ30PN)	6,696.77	254.25
28 21 31 00-0452		Wall Mount, High Resolution Color, Esprit® AJZ, Pan/Tilt Camera Systems *(28 21 31 00-0444)*		
28 21 31 00-0453	EA	6 x 10, Wall Mount, High Resolution Color, Esprit® AJZ, Pan/Tilt Camera System (Pelco ES3012-2AJZ10W)	4,922.14	254.25
28 21 31 00-0454	EA	5.6 x 20, Wall Mount, High Resolution Color, Esprit® AJZ, Pan/Tilt Camera System (Pelco ES3012-2AJZ20W)	5,609.98	254.25
28 21 31 00-0455	EA	5.5 x 30, Wall Mount, High Resolution Color, Esprit® AJZ, Pan/Tilt Camera System (Pelco ES3012-2AJZ30W)	6,566.08	254.25
28 21 31 00-0456	EA	6 x 8, Preset Positioning, Wall Mount, High Resolution Color, Esprit® AJZ, Pan/Tilt Camera System (Pelco ES3012-2AJZ8PW)	4,955.39	254.25
28 21 31 00-0457	EA	6 x 10, Preset Positioning, Wall Mount, High Resolution Color, Esprit® AJZ, Pan/Tilt Camera System (Pelco ES3012-2AJZ10W)	5,070.03	254.25
28 21 31 00-0458	EA	5.6 x 20, Preset Positioning, Wall Mount, High Resolution Color, Esprit® AJZ, Pan/Tilt Camera System (Pelco ES3012-2AJZ20PW)	5,788.82	254.25
28 21 31 00-0459	EA	5.5 x 30, Preset Positioning, Wall Mount, High Resolution Color, Esprit® AJZ, Pan/Tilt Camera System (Pelco ES3012-2AJZ30PW)	6,744.92	254.25
28 21 31 00-0460		Esprit® AMZ, Pan/Tilt Camera Systems *(28 21 31 00-0410)*		
28 21 31 00-0461		Day/Night, Esprit® AMZ, Pan/Tilt Camera Systems *(28 21 31 00-0460)*		
28 21 31 00-0462		Pedestal Mount, Day/Night, Esprit® AMZ, Pan/Tilt Camera Systems *(28 21 31 00-0461)*		
28 21 31 00-0463	EA	5.6 x 20, Pedestal Mount, Day/Night, Esprit® AMZ, Pan/Tilt Camera System (Pelco ES3012-2AMZ20N)	5,848.43	254.25
28 21 31 00-0464	EA	5.5 x 30, Pedestal Mount, Day/Night, Esprit® AMZ, Pan/Tilt Camera System (Pelco ES3012-2AMZ30N)	6,803.38	254.25
28 21 31 00-0465	EA	6 x 10, Preset Positioning, Pedestal Mount, Day/Night, Esprit® AMZ, Pan/Tilt Camera System (Pelco ES3012-2AMZ10PN)	5,308.48	254.25
28 21 31 00-0466	EA	5.6 x 20, Preset Positioning, Pedestal Mount, Day/Night, Esprit® AMZ, Pan/Tilt Camera System (Pelco ES3012-2AMZ20PN)	6,027.27	254.25
28 21 31 00-0467	EA	5.5 x 30, Preset Positioning, Pedestal Mount, Day/Night, Esprit® AMZ, Pan/Tilt Camera System (Pelco ES3012-2AMZ30PN)	6,982.22	254.25
28 21 31 00-0468		Wall Mount, Day/Night, Esprit® AMZ, Pan/Tilt Camera Systems *(28 21 31 00-0461)*		
28 21 31 00-0469	EA	6 x 10, Wall Mount, Day/Night, Esprit® AMZ, Pan/Tilt Camera System (Pelco ES3012-2AMZ10W)	5,207.59	254.25
28 21 31 00-0470	EA	5.6 x 20, Wall Mount, Day/Night, Esprit® AMZ, Pan/Tilt Camera System (Pelco ES3012-2AMZ20W)	5,895.43	254.25

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 21 31 00-0471	EA	5.5 x 30, Wall Mount, Day/Night, Esprit® AMZ, Pan/Tilt Camera System (Pelco ES3012-2AMZ30W)	6,851.53	254.25
28 21 31 00-0472	EA	6 x 10, Preset Positioning, Wall Mount, Day/Night, Esprit® AMZ, Pan/Tilt Camera System (Pelco ES3012-2AMZ10PW)	5,355.48	254.25
28 21 31 00-0473	EA	5.6 x 20, Preset Positioning, Wall Mount, Day/Night, Esprit® AMZ, Pan/Tilt Camera System (Pelco ES3012-2AMZ20PW)	6,074.27	254.25
28 21 31 00-0474	EA	5.5 x 30, Preset Positioning, Wall Mount, Day/Night, Esprit® AMZ, Pan/Tilt Camera System (Pelco ES3012-2AMZ30PW)	7,030.37	254.25
28 21 31 00-0475		Esprit® KWZ, Pan/Tilt Camera Systems *(28 21 31 00-0410)*		
28 21 31 00-0476		Day/Night, Esprit® KWZ, Pan/Tilt Camera Systems *(28 21 31 00-0475)*		
28 21 31 00-0477		Pedestal Mount, Day/Night, Esprit® KWZ, Pan/Tilt Camera Systems *(28 21 31 00-0476)*		
28 21 31 00-0478	EA	5.5 x 30, Pedestal Mount, Day/Night, Esprit® KWZ, Pan/Tilt Camera System (Pelco ES3012-2KWZ30N)	6,955.85	254.25
28 21 31 00-0479	EA	6 x 10, Preset Positioning, Pedestal Mount, Day/Night, Esprit® KWZ, Pan/Tilt Camera System (Pelco ES3012-2KWZ10PN)	5,459.80	254.25
28 21 31 00-0480	EA	5.5 x 30, Preset Positioning, Pedestal Mount, Day/Night, Esprit® KWZ, Pan/Tilt Camera System (Pelco ES3012-2KWZ30PN)	7,134.69	254.25
28 21 31 00-0481		Wall Mount, Day/Night, Esprit® KWZ, Pan/Tilt Camera Systems *(28 21 31 00-0476)*		
28 21 31 00-0482	EA	6 x 10, Wall Mount, Day/Night, Esprit® KWZ, Pan/Tilt Camera System (Pelco ES3012-2KWZ10W)	5,358.92	254.25
28 21 31 00-0483	EA	5.5 x 30, Wall Mount, Day/Night, Esprit® KWZ, Pan/Tilt Camera System (Pelco ES3012-2KWZ30W)	7,004.00	254.25
28 21 31 00-0484	EA	6 x 10, Preset Positioning, Wall Mount, Day/Night, Esprit® KWZ, Pan/Tilt Camera System (Pelco ES3012-2KWZ10PW)	5,507.95	254.25
28 21 31 00-0485	EA	5.6 x 20, Preset Positioning, Wall Mount, Day/Night, Esprit® KWZ, Pan/Tilt Camera System (Pelco ES3012-2KWZ20PW)	6,226.74	254.25
28 21 31 00-0486	EA	5.5 x 30, Preset Positioning, Wall Mount, Day/Night, Esprit® KWZ, Pan/Tilt Camera System (Pelco ES3012-2KWZ30PW)	7,182.84	254.25
28 21 31 00-0487		Esprit® IOC, Pan/Tilt Camera Systems *(28 21 31 00-0410)*		
28 21 31 00-0488		Standard Resolution Color, Esprit® IOC, Pan/Tilt Camera Systems *(28 21 31 00-0487)*		
28 21 31 00-0489		Pedestal Mount, Standard Resolution Color, Esprit® IOC, Pan/Tilt Camera Systems *(28 21 31 00-0488)*		
28 21 31 00-0490	EA	16X, Pedestal Mount, Standard Resolution Color, Esprit® IOC, Pan/Tilt Camera System (Pelco ES30PC16-2N)	5,839.26	254.25
28 21 31 00-0491		Wall Mount, Standard Resolution Color, Esprit® IOC, Pan/Tilt Camera Systems *(28 21 31 00-0488)*		
28 21 31 00-0492	EA	16X, Wall Mount, Standard Resolution Color, Esprit® IOC, Pan/Tilt Camera System (Pelco ES30PC16-2W)	5,886.26	254.25
28 21 31 00-0493		High Resolution Color, Esprit® IOC, Pan/Tilt Camera Systems *(28 21 31 00-0487)*		
28 21 31 00-0494		Pedestal Mount, High Resolution Color, Esprit® IOC, Pan/Tilt Camera Systems *(28 21 31 00-0493)*		
28 21 31 00-0495	EA	22X, Pedestal Mount, High Resolution Color, Esprit® IOC, Pan/Tilt Camera System (Pelco ES30PC22-2N)	6,955.85	254.25
28 21 31 00-0496	EA	24X, Pedestal Mount, High Resolution Color, Esprit® IOC, Pan/Tilt Camera System (Pelco ES30PCBW24-2N)	6,721.99	254.25
28 21 31 00-0497	EA	35X, Pedestal Mount, High Resolution Color, Esprit® IOC, Pan/Tilt Camera System (Pelco ES30PCBW35-2N)	7,656.30	254.25
28 21 31 00-0498		Wall Mount, High Resolution Color, Esprit® IOC, Pan/Tilt Camera Systems *(28 21 31 00-0493)*		
28 21 31 00-0499	EA	22X, Wall Mount, High Resolution Color, Esprit® IOC, Pan/Tilt Camera System (Pelco ES30PC22-2W)	7,001.71	254.25
28 21 31 00-0500	EA	24X, Wall Mount, High Resolution Color, Esprit® IOC, Pan/Tilt Camera System (Pelco ES30PCBW24-2W)	6,721.99	254.25
28 21 31 00-0501	EA	35X, Wall Mount, High Resolution Color, Esprit® IOC, Pan/Tilt Camera System (Pelco ES30PCBW35-2W)	7,707.89	254.25
28 21 31 00-0502		Esprit® IOP, Pan/Tilt Camera Systems *(28 21 31 00-0410)*		
28 21 31 00-0503		High Resolution Color, Esprit® IOP, Pan/Tilt Camera Systems *(28 21 31 00-0502)*		
28 21 31 00-0504		Pedestal Mount, High Resolution Color, Esprit® IOP, Pan/Tilt Camera Systems *(28 21 31 00-0503)*		
28 21 31 00-0505	EA	16X, Pedestal Mount, High Resolution Color, Esprit® IOP, Pan/Tilt Camera System (Pelco ES30C16-2N)	4,464.73	254.25
28 21 31 00-0506	EA	22X, Pedestal Mount, High Resolution Color, Esprit® IOP, Pan/Tilt Camera System (Pelco ES30C22-2N)	5,582.47	254.25
28 21 31 00-0507	EA	24X, Pedestal Mount, High Resolution Color, Esprit® IOP, Pan/Tilt Camera System (Pelco ES30CBW24-2N)	5,352.04	254.25
28 21 31 00-0508	EA	35X, Pedestal Mount, High Resolution Color, Esprit® IOP, Pan/Tilt Camera System (Pelco ES30CBW35-2N)	6,080.00	254.25
28 21 31 00-0509		Wall Mount, High Resolution Color, Esprit® IOP, Pan/Tilt Camera Systems *(28 21 31 00-0503)*		
28 21 31 00-0510	EA	16X, Wall Mount, High Resolution Color, Esprit® IOP, Pan/Tilt Camera System (Pelco ES30C16-2W)	4,510.58	254.25
28 21 31 00-0511	EA	22X, Wall Mount, High Resolution Color, Esprit® IOP, Pan/Tilt Camera System (Pelco ES30C22-2W)	5,629.47	254.25
28 21 31 00-0512	EA	24X, Wall Mount, High Resolution Color, Esprit® IOP, Pan/Tilt Camera System (Pelco ES30CBW24-2W)	5,399.04	254.25
28 21 31 00-0513	EA	35X, Wall Mount, High Resolution Color, Esprit® IOP, Pan/Tilt Camera System (Pelco ES30CBW35-2W)	6,131.59	254.25

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 21 31 00-0514		Esprit® Thermal, Pan/Tilt Camera Systems *(28 21 31 00-0410)*		
28 21 31 00-0515		Esprit® Thermal, Pan/Tilt Camera Systems *(28 21 31 00-0514)*		
28 21 31 00-0516		Pedestal Mount, Esprit® Thermal, Pan/Tilt Camera Systems *(28 21 31 00-0515)*		
28 21 31 00-0517	EA	14.25 mm, Pedestal Mount, Esprit® Thermal, Pan/Tilt Camera System (Pelco ES3014TI-2N)	29,291.16	254.25
28 21 31 00-0518	EA	35 mm, Pedestal Mount, Esprit® Thermal, Pan/Tilt Camera System (Pelco ES3035TI-2N)	31,507.16	254.25
28 21 31 00-0519	EA	50 mm, Pedestal Mount, Esprit® Thermal, Pan/Tilt Camera System (Pelco ES3050TI-2N)	32,251.17	254.25
28 21 31 00-0520		Wall Mount, Esprit® Thermal, Pan/Tilt Camera Systems *(28 21 31 00-0515)*		
28 21 31 00-0521	EA	14.25 mm, Wall Mount, Esprit® Thermal, Pan/Tilt Camera System (Pelco ES3014TI-2W)	29,339.31	254.25
28 21 31 00-0522	EA	35 mm, 30 Hertz, Wall Mount, Esprit® Thermal, Pan/Tilt Camera System (Pelco ES3035TI-2W)	31,554.16	254.25
28 21 31 00-0523	EA	50 mm, Wall Mount, Esprit® Thermal, Pan/Tilt Camera System (Pelco ES3050TI-2W)	32,298.17	254.25
28 21 31 00-0524		Accessories For Esprit® Pan/Tilt Camera Systems *(28 21 31 00-0410)*		
28 21 31 00-0525	EA	Wiper Blade Replacement For Esprit® Systems (Pelco ES-REPLBLADE)	11.73	2.82
28 21 31 00-0526	EA	Marine Mounting Kit For Esprit® Systems (Pelco ES-MKIT)	68.37	14.13
28 21 31 00-0527	EA	Indoor/Outdoor Wall Mount For Esprit® Systems (Pelco EWM)	109.64	14.13
28 21 31 00-0528	EA	Wall Mount For High Security Enclosures (Pelco HSWM12)	140.60	14.13
28 21 31 00-0529	EA	Ground Isolation Transformer (Pelco GIT100)	396.23	38.58
28 21 31 00-0530	EA	High Security, Indoor Wedge Style Enclosure (Pelco HS2100)	558.99	38.58
28 21 31 00-0531	EA	High Security, Indoor 10" Length Enclosure (Pelco HS3000)	479.92	38.58
28 21 31 00-0532	EA	High Security, Indoor Medium Corner Mount Enclosure (Pelco HS1500)	651.63	38.58
28 21 31 00-0533	EA	High Security, Ceiling Mount, Lexan Window, Aluminum Enclosure (Pelco HS8080)	365.28	38.58
28 21 31 00-0534	EA	High Security, Ceiling Mount, Lexan Window, Steel Enclosure (Pelco HS8134)	940.90	38.58
28 21 31 00-0535	EA	Bullet-Resistant, Outdoor Enclosure (Pelco HS4514)	1,558.68	38.58
28 21 31 00-0536	EA	Bullet-Resistant, Outdoor Enclosure With Mount (Pelco HS4514/MT)	1,857.89	38.58
28 21 31 00-0537	EA	24X, Color/Black And White, Esprit® Camera Module (Pelco ESIOPCBW24)	1,925.53	38.58
28 21 31 00-0538	EA	35X, Color/Black And White, Esprit® Camera Module (Pelco ESIOPCBW35)	2,032.14	38.58
28 21 31 00-0539	EA	24 Volt AC, Esprit® Pan Tilt Enclosure Receiver (Pelco ES3012-2)	2,429.51	38.59
28 21 31 00-0540	EA	24 Volt AC, Pedestal Mount, Esprit® Pan/Tilt Enclosure Receiver (Pelco ES3012-2N)	2,458.53	38.58
28 21 31 00-0541	EA	24 Volt AC, Wall Mount, Esprit® Pan/Tilt Enclosure Receiver (Pelco ES3012-2W)	2,486.39	38.58
28 21 31 00-0542	EA	30X, 24 Volt AC, DSS, Color High Resolution, Esprit® CLZ Pan/Tilt Camera System (Pelco ES3012-2CLZ30)	6,428.59	38.58
28 21 31 00-0543	EA	30X, 24 Volt AC, Preset Positioning, DSS, Color High Resolution, Esprit® CLZ Pan/Tilt Camera System (Pelco ES3012-2CLZ30P)	6,607.43	38.58
28 21 31 00-0544	EA	Esprit® Camera Pole Mount Adapter (Pelco EPM)	108.67	9.09
28 21 31 00-0545	EA	Pole Mount Adapter For Esprit® Systems (Pelco EPM)	108.67	9.09
28 21 31 00-0546		Camera Lenses *(28 21 31 00-0045)*		
28 21 31 00-0547		Fixed Focus Camera Lenses *(28 21 31 00-0546)* Note: 1/3" format and manual focus.		
28 21 31 00-0548		Manual Iris, Fixed Focus Camera Lenses *(28 21 31 00-0547)*		
28 21 31 00-0549	EA	2.3 mm, Manual Iris, Fixed Focus Camera Lens (Pelco 13FA2.3)	176.84	13.25
28 21 31 00-0550	EA	2.8 mm, Manual Iris, Fixed Focus Camera Lens (Pelco 13FA2.8)	144.74	13.25
28 21 31 00-0551	EA	4 mm, Manual Iris, Fixed Focus Camera Lens (Pelco 13FA4)	128.69	13.25
28 21 31 00-0552	EA	8 mm, Manual Iris, Fixed Focus Camera Lens (Pelco 13FA8)	125.25	13.25
28 21 31 00-0553		Direct Drive Auto Iris, Fixed Focus Camera Lenses *(28 21 31 00-0547)* Note: Includes spot filter. Excludes amplifier.		
28 21 31 00-0554	EA	2.3 mm, Direct Drive Auto Iris, Fixed Focus Camera Lens (Pelco 13FD2.3)	223.84	13.25
28 21 31 00-0555	EA	2.8 mm, Direct Drive Auto Iris, Fixed Focus Camera Lens (Pelco 13FD2.8)	176.84	13.25
28 21 31 00-0556	EA	4 mm, Direct Drive Auto Iris, Fixed Focus Camera Lens (Pelco 13FD4)	165.38	13.25
28 21 31 00-0557	EA	8 mm, Direct Drive Auto Iris, Fixed Focus Camera Lens (Pelco 13FD8)	114.94	13.25
28 21 31 00-0558		Video Drive Auto Iris, Fixed Focus Camera Lenses *(28 21 31 00-0547)* Note: Includes LDC100 adapter to convert DC auto iris to video drive.		
28 21 31 00-0559	EA	2.3 mm, Video Drive Auto Iris, Fixed Focus Camera Lenses (Pelco 13FV2.3S)	266.26	13.25
28 21 31 00-0560	EA	2.8 mm, Video Drive Auto Iris, Fixed Focus Camera Lenses (Pelco 13FV2.8S)	218.11	13.25
28 21 31 00-0561	EA	4 mm, Video Drive Auto Iris, Fixed Focus Camera Lenses (Pelco 13FV4S)	206.65	13.25
28 21 31 00-0562	EA	8 mm, Video Drive Auto Iris, Fixed Focus Camera Lenses (Pelco 13FV8S)	197.48	13.25
28 21 31 00-0563		Varifocal Camera Lenses *(28 21 31 00-0546)* Note: 1/3" format and manual focus and zoom.		
28 21 31 00-0564		Manual Iris, Varifocal Camera Lenses *(28 21 31 00-0563)*		
28 21 31 00-0565	EA	1.6-3.4 mm, Manual Iris, Varifocal Camera Lens (Pelco 13VA1-3)	235.04	13.25
28 21 31 00-0566	EA	2.5-6 mm, Manual Iris, Varifocal Camera Lens (Pelco 13VA2.5-6)	208.94	13.25
28 21 31 00-0567	EA	2.8-12 mm, Manual Iris, Varifocal Camera Lens (Pelco 13VA2.8-12)	159.65	13.25
28 21 31 00-0568	EA	3-8 mm, Manual Iris, Varifocal Camera Lens (Pelco 13VA3-8)	139.01	13.25
28 21 31 00-0569	EA	5.5-82.5 mm, Manual Iris, Varifocal Camera Lens (Pelco 13VA5.5-82.5)	380.90	13.25
28 21 31 00-0570	EA	5-40 mm, Manual Iris, Varifocal Camera Lens (Pelco 13VA5-40)	181.41	13.25
28 21 31 00-0571	EA	5-50 mm, Manual Iris, Varifocal Camera Lens (Pelco 13VA5-50)	193.60	13.25

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 21 31 00-0572		**Direct Drive Auto Iris, Varifocal Camera Lenses** *(28 21 31 00-0563)*		
		Note: Includes spot filter.		
28 21 31 00-0573	EA	1.6-3.4 mm, Direct Drive Auto Iris, Varifocal Camera Lens (Pelco 13VD1-3)	230.98	13.25
28 21 31 00-0574	EA	2.5-6 mm, Direct Drive Auto Iris, Varifocal Camera Lens (Pelco 13VD2.5-6)	203.35	13.25
28 21 31 00-0575	EA	2.8-12 mm, Direct Drive Auto Iris, Varifocal Camera Lens (Pelco 13VD2.8-12)	154.60	13.25
28 21 31 00-0576	EA	3-8 mm, Direct Drive Auto Iris, Varifocal Camera Lens (Pelco 13VD3-8)	113.97	13.25
28 21 31 00-0577	EA	5.5-82.5 mm, Direct Drive Auto Iris, Varifocal Camera Lens (Pelco 13VD5.5-82.5)	416.44	13.25
28 21 31 00-0578	EA	5-50 mm, Direct Drive Auto Iris, Varifocal Camera Lens (Pelco 13VD5-50)	228.54	13.25
28 21 31 00-0579		**Video Drive Auto Iris, Varifocal Camera Lenses** *(28 21 31 00-0563)*		
		Note: Includes spot filter.		
28 21 31 00-0580	EA	1.6-3.4 mm, Video Drive Auto Iris, Varifocal Camera Lens (Pelco 13VV1-3S)	363.70	13.25
28 21 31 00-0581	EA	2.5-6 mm, Video Drive Auto Iris, Varifocal Camera Lens (Pelco 13VV2.5-6S)	321.29	13.25
28 21 31 00-0582	EA	3-8 mm, Video Drive Auto Iris, Varifocal Camera Lens (Pelco 13VV3-8S)	188.31	13.25
28 21 31 00-0583	EA	5-50 mm, Video Drive Auto Iris, Varifocal Camera Lens (Pelco 13VV5-50S)	359.12	13.25
28 21 31 00-0584		**Infrared Corrected, Direct Drive Auto Iris, Varifocal Camera Lenses** *(28 21 31 00-0563)*		
28 21 31 00-0585	EA	3-8.5 mm, Infrared Corrected, Direct Drive Auto Iris, Varifocal Camera Lens (Pelco 13VDIR3-8.5)	132.66	13.25
28 21 31 00-0586	EA	7.5-50 mm, Infrared Corrected, Direct Drive Auto Iris, Varifocal Camera Lens (Pelco 13VDIR7.5-50)	201.73	13.25
28 21 31 00-0587		**Motorized Zoom Camera Lenses** *(28 21 31 00-0546)*		
		Note: 1/3" format.		
28 21 31 00-0588		**Manual Iris, Motorized Zoom Camera Lenses** *(28 21 31 00-0587)*		
28 21 31 00-0589	EA	8X Zoom, 6-48 mm, Manual Iris, Motorized Zoom Camera Lens (Pelco 13ZM6X8)	669.79	13.25
28 21 31 00-0590	EA	10X Zoom, 6-60 mm, Manual Iris, Motorized Zoom Camera Lens (Pelco 13ZM6X10)	839.46	13.25
28 21 31 00-0591	EA	15X Zoom, 6-90 mm, Manual Iris, Motorized Zoom Camera Lens (Pelco 13ZM6X15)	895.63	13.25
28 21 31 00-0592		**Direct Drive Auto Iris, Motorized Zoom Camera Lenses** *(28 21 31 00-0587)*		
		Note: Includes spot filter.		
28 21 31 00-0593	EA	6X Zoom, 6-48 mm, Direct Drive Auto Iris, Motorized Zoom Camera Lens (Pelco 13ZD6X8)	543.82	13.25
28 21 31 00-0594	EA	10X Zoom, 6-60 mm, Direct Drive Auto Iris, Motorized Zoom Camera Lens (Pelco 13ZD6X10)	629.13	13.25
28 21 31 00-0595	EA	15X Zoom, 6-90 mm, Direct Drive Auto Iris, Motorized Zoom Camera Lens (Pelco 13ZD6X15)	990.79	13.25
28 21 31 00-0596	EA	20X Zoom, 5.6-112 mm, Direct Drive Auto Iris, Motorized Zoom Camera Lens (Pelco 13ZD5.6X20)	1,082.54	13.25
28 21 31 00-0597	EA	30X Zoom, 5.5-165 mm, Direct Drive Auto Iris, Motorized Zoom Camera Lens (Pelco 13ZD5.5X30)	2,152.69	13.25
28 21 31 00-0598		**Video Drive Auto Iris, Motorized Zoom Camera Lenses** *(28 21 31 00-0587)*		
		Note: Includes spot filter.		
28 21 31 00-0599	EA	8X Zoom, 6-48 mm, Video Drive Auto Iris, Motorized Zoom Camera Lens (Pelco 13ZV6X8S)	686.99	13.25
28 21 31 00-0600	EA	10X Zoom, 6-60 mm, Video Drive Auto Iris, Motorized Zoom Camera Lens (Pelco 13ZV6X10S)	819.97	13.25
28 21 31 00-0601	EA	15X Zoom, 6-90 mm, Video Drive Auto Iris, Motorized Zoom Camera Lens (Pelco 13ZV6X15S)	1,033.20	13.25
28 21 31 00-0602	EA	20X Zoom, 5.6-112 mm, Video Drive Auto Iris, Motorized Zoom Camera Lens (Pelco 13ZV5.6X20S)	1,508.96	13.25
28 21 31 00-0603	EA	30X Zoom, 5.5-165 mm, Video Drive Auto Iris, Motorized Zoom Camera Lens (Pelco 13ZV5.5X30S)	2,463.91	13.25
28 21 31 00-0604		**Camera Power Supplies** *(28 21 31 00-0045)*		
28 21 31 00-0605	EA	20 VA, 24 Volt AC, Camera Power Transformer (Pelco TF2000)	43.24	11.30
28 21 31 00-0606	EA	50 VA, 24 Volt AC, Camera Power Transformer (Pelco TF9000)	77.63	11.30
28 21 31 00-0607	EA	2 Amperes, 4 Outputs, Camera Power Supply (Pelco MCS4-2)	309.28	22.60
28 21 31 00-0608	EA	5 Amperes, 8 Outputs, Camera Power Supply (Pelco MCS8-5)	356.26	33.90
28 21 31 00-0609	EA	10 Amperes, 16 Outputs, Camera Power Supply (Pelco MCS16-10)	400.80	45.20
		For Switchable Outputs, Add	*186.24*	
28 21 31 00-0610	EA	20 Amperes, 16 Outputs, Camera Power Supply (Pelco MCS16-20)	447.77	56.50
		For Switchable Outputs, Add	*200.86*	
28 21 31 00-0611		**Camera Illuminators** *(28 21 31 00-0045)*		
28 21 31 00-0612		**Camera Illuminators** *(28 21 31 00-0611)*		
		Note: Includes lamp and mounting bracket.		
28 21 31 00-0613	EA	Narrow Spot Lamp, Low Light Level Camera Illuminator (Pelco LL27MF)	1,801.48	22.60
28 21 31 00-0614	EA	Infrared Narrow Spot Lamp, Low Light Level Camera Illuminator (Pelco LL27NS)	1,801.48	22.60
28 21 31 00-0615	EA	Flood Lamp, Low Light Level Camera Illuminator (Pelco LL27WF)	1,801.48	22.60
28 21 31 00-0616		**Camera Illuminator Accessories** *(28 21 31 00-0611)*		
28 21 31 00-0617	EA	Removal And Replacement Of Lamp For Low Light Level Camera Illuminator (Pelco PAR56)	142.64	22.60
28 21 31 00-0618		**Camera Receivers** *(28 21 31 00-0045)*		
28 21 31 00-0619	EA	24 Volt AC, Coaxitron® Outdoor Camera Receiver With Preset Positioning (Pelco CX9024RX-PP)	1,728.35	38.58
28 21 31 00-0620	EA	120 Volt AC, Coaxitron® Outdoor Camera Receiver With Preset Positioning (Pelco CX9115RX-PP)	1,728.35	38.58
28 21 31 00-0621		**Pan And Tilt Drives** *(28 21 31 00-0045)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 21 31 00-0622	EA	15 Lb. Load, 24 Volt AC, Outdoor Pan And Tilt Drive (Pelco PT270-24P)	1,216.16	84.75
28 21 31 00-0623	EA	40 Lb. Load, 24/120 Volt AC, Outdoor Pan And Tilt Drive (Pelco PT570-24P)	1,550.91	84.75
		For Preset Positioning, Add	*165.00*	
28 21 31 00-0624	EA	100 Lb. Load, 120 Volt AC, Outdoor Pan And Tilt Drive (Pelco PT1250P)	3,307.20	84.75
		For Preset Positioning, Add	*165.00*	
28 21 31 00-0625	EA	100 Lb. Load, 120 Volt DC, Outdoor Pan And Tilt Drive (Pelco PT1250DC)	3,782.95	84.75
		For Preset Positioning, Add	*165.00*	
28 21 31 00-0626	EA	100 Lb. Load, 120 Volt DC, 360 Degree Outdoor Pan And Tilt Drive (Pelco PT1280SL)	4,381.37	84.75
		For Preset Positioning, Add	*165.00*	
28 21 31 00-0627	EA	100 Lb. Load, 120 Volt DC, Explosion Proof Outdoor Pan And Tilt Drive (Pelco PT1260EX)	5,653.88	84.75
		For Preset Positioning, Add	*165.00*	
28 21 31 00-0628		**Scanners** *(28 21 31 00-0045)*		
28 21 31 00-0629	EA	35 Lb. Load, 24 Volt AC, Indoor/Outdoor Scanner (Pelco PS20-24)	1,391.56	84.75
		For Wall Mount, Add	*39.05*	
		For Pressure Sensor Alarm, Add	*51.15*	
28 21 31 00-0630	EA	35 Lb. Load, 120 Volt AC, Indoor/Outdoor Scanner (Pelco PS20)	1,463.79	84.75
		For Wall Mount, Add	*39.05*	
		For Pressure Sensor Alarm, Add	*51.15*	
28 21 31 00-0631		**Camera Monitors** *(28 21 31 00-0044)*		
28 21 31 00-0632		**Camera Monitors** *(28 21 31 00-0631)*		
28 21 31 00-0633		**Monochrome Camera Monitors** *(28 21 31 00-0632)*		
28 21 31 00-0634	EA	9" Monochrome Camera Monitor (Pelco PMM9A)	271.20	16.95
28 21 31 00-0635	EA	12" Monochrome Camera Monitor (Pelco PMM12A)	311.33	16.95
28 21 31 00-0636	EA	15" Monochrome Camera Monitor (Pelco PMM15A)	481.00	16.95
28 21 31 00-0637	EA	20" Monochrome Camera Monitor (Pelco PMM20A)	777.91	16.95
28 21 31 00-0638		**Color Camera Monitors** *(28 21 31 00-0632)*		
28 21 31 00-0639	EA	9", High Resolution Color, Camera Monitor (Pelco PMC9A)	878.80	16.95
28 21 31 00-0640	EA	15", High Resolution Color, Camera Monitor (Pelco PMCS15A)	711.42	16.95
28 21 31 00-0641	EA	17", High Resolution Color, Camera Monitor (Pelco PMCS17A)	1,037.00	16.95
28 21 31 00-0642	EA	19", High Resolution Color, Camera Monitor (Pelco PMCS19A)	1,380.92	16.95
28 21 31 00-0643		**LCD Camera Monitors** *(28 21 31 00-0631)*		
28 21 31 00-0644		**VGA Signal, Color LCD Camera Monitors (Pelco 200 Series)** *(28 21 31 00-0643)*		
		Note: Displays VGA computer signals.		
28 21 31 00-0645	EA	17", VGA Signal, High Resolution Color, LCD Camera Monitor (Pelco PMCL217)	994.58	16.95
28 21 31 00-0646	EA	19", VGA Signal, High Resolution Color, LCD Camera Monitor (Pelco PMCL219)	1,297.23	16.95
28 21 31 00-0647		**Multimode, Color LCD Camera Monitors (Pelco 300 Series)** *(28 21 31 00-0643)*		
		Note: Displays VGA computer signals and/or composite video signals.		
28 21 31 00-0648	EA	15", Multimode, High Resolution Color, LCD Camera Monitor (Pelco PMCL315)	1,132.15	16.95
28 21 31 00-0649	EA	17", Multimode, High Resolution Color, LCD Camera Monitor (Pelco PMCL317)	1,356.85	16.95
28 21 31 00-0650	EA	19", Multimode, High Resolution Color, LCD Camera Monitor (Pelco PMCL319)	1,670.96	16.95
28 21 31 00-0651		**Multimode With PIP, Color LCD Camera Monitors (Pelco 400 Series)** *(28 21 31 00-0643)*		
		Note: Displays VGA computer signals and/or composite video signals. Includes picture in picture option.		
28 21 31 00-0652	EA	15", Multimode With PIP, High Resolution Color, LCD Camera Monitor (Pelco PMCL415)	1,455.44	16.95
28 21 31 00-0653	EA	17", Multimode With PIP, High Resolution Color, LCD Camera Monitor (Pelco PMCL417)	1,689.30	16.95
28 21 31 00-0654	EA	19", Multimode With PIP, High Resolution Color, LCD Camera Monitor (Pelco PMCL419)	2,121.49	16.95
28 21 31 00-0655		**Camera Monitor Mounting Accessories** *(28 21 31 00-0631)*		
28 21 31 00-0656		**Camera Monitor Mounts** *(28 21 31 00-0655)*		
28 21 31 00-0657	EA	Up To 14", Camera Monitor Mount (Pelco)	331.80	22.60
28 21 31 00-0658	EA	>14" To 17", Camera Monitor Mount (Pelco)	387.97	22.60
28 21 31 00-0659	EA	>17" To 21", Camera Monitor Mount (Pelco)	456.76	22.60
28 21 31 00-0660		**Camera Monitor Rack Mount Kits** *(28 21 31 00-0655)*		
28 21 31 00-0661	EA	Camera Monitor Rack Mount Kit (Pelco PMCL-RM)	197.67	22.60
28 21 31 00-0662		**Video Transmission Equipment** *(28 21 31 00-0044)*		
28 21 31 00-0663		**UTP Cable, Video Transmission Equipment** *(28 21 31 00-0662)*		
28 21 31 00-0664		**UTP Cable, Active Video Receivers** *(28 21 31 00-0663)*		
28 21 31 00-0665	EA	Single Channel, UTP Cable, Active Video Receiver (Pelco TW3001AR)	417.62	28.25
28 21 31 00-0666	EA	Four Channel, UTP Cable, Active Video Receiver (Pelco TW3004AR)	1,464.28	28.25
28 21 31 00-0667	EA	Eight Channel, 4 Outputs, UTP Cable, Active Video Receiver (Pelco TW3008AR-4-US)	2,891.55	28.25

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 21 31 00-0668	EA	Sixteen Channel, UTP Cable, Active Video Receiver (Pelco TW3016AR1-US)	4,756.74	28.25
28 21 31 00-0669	EA	Sixteen Channel, 2 Outputs, UTP Cable, Active Video Receiver (Pelco TW3016AR-2-US)	5,555.78	28.25
28 21 31 00-0670		**UTP Cable, Passive Video Transceivers** *(28 21 31 00-0663)*		
28 21 31 00-0671	EA	Single Channel, UTP Cable, Passive Video Transceiver (Pelco TW3001P)	114.97	28.25
28 21 31 00-0672	EA	Four Channel, UTP Cable, Passive Video Transceiver (Pelco TW3004P)	417.62	28.25
28 21 31 00-0673	EA	Eight Channel, UTP Cable, Passive Video Transceiver (Pelco TW3008P)	779.88	28.25
28 21 31 00-0674	EA	Sixteen Channel, UTP Cable, Passive Video Transceiver (Pelco TW3016P)	1,492.94	28.25
28 21 31 00-0675	EA	Thirty Two Channel, UTP Cable, Passive Video Transceiver (Pelco TW3032P)	2,930.52	28.25
28 21 31 00-0676		**UTP Cable, Active Video Transmitters** *(28 21 31 00-0663)*		
28 21 31 00-0677	EA	Single Channel, UTP Cable, Active Video Transmitter (Pelco TW3001AT)	437.10	28.25
28 21 31 00-0678		**Fiber Optics, Video Transmission Equipment** *(28 21 31 00-0662)*		
28 21 31 00-0679		**Data Only, Fiber Optics Transmission Equipment** *(28 21 31 00-0678)*		
28 21 31 00-0680		**Bidirectional Data, Fiber Optics Transmitters** *(28 21 31 00-0679)*		
28 21 31 00-0681	EA	Single-Channel, Single Mode, Bidirectional Data, Fiber Optics Transmitter (Pelco FT8101AS)	2,575.47	56.50
28 21 31 00-0682	EA	Single-Channel, Multimode, Bidirectional Data, Fiber Optics Transmitter (Pelco FT8101AM)	1,041.58	56.50
28 21 31 00-0683	EA	Four-Channel, Single Mode, Bidirectional Data, Fiber Optics Transmitter (Pelco FT8104S)	1,877.31	56.50
28 21 31 00-0684	EA	Four-Channel, Multimode, Bidirectional Data, Fiber Optics Transmitter (Pelco FT8104M)	1,289.21	56.50
28 21 31 00-0685		**Bidirectional Data, Fiber Optics Receivers** *(28 21 31 00-0679)*		
28 21 31 00-0686	EA	Single-Channel, Single Mode, Bidirectional Data, Fiber Optics Receiver (Pelco FR8101AS)	2,575.47	56.50
28 21 31 00-0687	EA	Single-Channel, Multimode, Bidirectional Data, Fiber Optics Receiver (Pelco FR8101AM)	1,041.58	56.50
28 21 31 00-0688	EA	Four-Channel, Single Mode, Bidirectional Data, Fiber Optics Receiver (Pelco FR8104S)	1,877.31	56.50
28 21 31 00-0689	EA	Four-Channel, Multimode, Bidirectional Data, Fiber Optics Receiver (Pelco FR8104M)	1,289.21	56.50
28 21 31 00-0690		**Video Only, Fiber Optics Transmission Equipment** *(28 21 31 00-0678)*		
28 21 31 00-0691		**Digitally Encoded Video, Fiber Optics Transmitters** *(28 21 31 00-0690)*		
28 21 31 00-0692	EA	Single-Channel, Single Mode, Digitally Encoded Video, Fiber Optics Transmitter (Pelco FT8301AS)	1,133.30	56.50
28 21 31 00-0693	EA	Single-Channel, Multimode, Digitally Encoded Video, Fiber Optics Transmitter (Pelco FT8301AM)	484.43	56.50
28 21 31 00-0694	EA	Four-Channel, Single Mode, Digitally Encoded Video, Fiber Optics Transmitter (Pelco FT8304S)	3,172.74	56.50
28 21 31 00-0695	EA	Four-Channel, Multimode, Digitally Encoded Video, Fiber Optics Transmitter (Pelco FT8304M)	1,900.24	56.50
28 21 31 00-0696	EA	Eight-Channel, Single Mode, Digitally Encoded Video, Fiber Optics Transmitter (Pelco FT8308S)	5,208.75	56.50
28 21 31 00-0697	EA	Eight-Channel, Multimode, Digitally Encoded Video, Fiber Optics Transmitter (Pelco FT8308M)	4,328.31	56.50
28 21 31 00-0698	EA	Sixteen-Channel, Single Mode, Digitally Encoded Video, Fiber Optics Transmitter (Pelco FT8316S)	12,958.41	56.50
28 21 31 00-0699	EA	Sixteen-Channel, Multimode, Digitally Encoded Video, Fiber Optics Transmitter (Pelco FT8316M)	11,531.14	56.50
28 21 31 00-0700		**Digitally Encoded Video, Fiber Optics Receivers** *(28 21 31 00-0690)*		
28 21 31 00-0701	EA	Single-Channel, Single Mode, Digitally Encoded Video, Fiber Optics Receiver (Pelco FR8301AS)	1,133.30	56.50
28 21 31 00-0702	EA	Single-Channel, Multimode, Digitally Encoded Video, Fiber Optics Receiver (Pelco FR8301AM)	484.43	56.50
28 21 31 00-0703	EA	Two-Channel, Single Mode, Digitally Encoded Video, Fiber Optics Receiver (Pelco FR8302AS)	1,947.24	56.50
28 21 31 00-0704	EA	Two-Channel, Multimode, Digitally Encoded Video, Fiber Optics Receiver (Pelco FR8302AM)	779.06	56.50
28 21 31 00-0705	EA	Four-Channel, Single Mode, Digitally Encoded Video, Fiber Optics Receiver (Pelco FR8304S)	3,172.74	56.50
28 21 31 00-0706	EA	Four-Channel, Multimode, Digitally Encoded Video, Fiber Optics Receiver (Pelco FR8304M)	1,900.24	56.50
28 21 31 00-0707	EA	Eight-Channel, Single Mode, Digitally Encoded Video, Fiber Optics Receiver (Pelco FR8308S)	5,208.75	56.50
28 21 31 00-0708	EA	Eight-Channel, Multimode, Digitally Encoded Video, Fiber Optics Receiver (Pelco FR8308M)	4,328.31	56.50
28 21 31 00-0709	EA	Sixteen-Channel, Single Mode, Digitally Encoded Video, Fiber Optics Receiver (Pelco FR8316S)	12,958.41	56.50
28 21 31 00-0710	EA	Sixteen-Channel, Multimode, Digitally Encoded Video, Fiber Optics Receiver (Pelco FR8316M)	11,531.14	56.50
28 21 31 00-0711		**Video And Data, Fiber Optics Transmission Equipment** *(28 21 31 00-0678)*		
28 21 31 00-0712		**Digitally Encoded Video With Bidirectional Data, Fiber Optics Transmitters** *(28 21 31 00-0711)*		
28 21 31 00-0713	EA	Single-Channel, Single Mode, Digitally Encoded Video With Bidirectional Data, Fiber Optics Transmitter (Pelco FT85011AS)	1,966.73	56.50
28 21 31 00-0714	EA	Single-Channel, Multimode, Digitally Encoded Video With Bidirectional Data, Fiber Optics Transmitter (Pelco FT85011AM)	1,165.40	56.50
28 21 31 00-0715	EA	Four-Channel, Single Mode, Digitally Encoded Video With Bidirectional Data, Fiber Optics Transmitter (Pelco FT85041S)	4,602.30	56.50
28 21 31 00-0716	EA	Four-Channel, Multimode, Digitally Encoded Video With Bidirectional Data, Fiber Optics Transmitter (Pelco FT85041M)	3,982.10	56.50
28 21 31 00-0717	EA	Eight-Channel, Single Mode, Digitally Encoded Video With Bidirectional Data, Fiber Optics Transmitter (Pelco FT85081S)	7,460.28	56.50
28 21 31 00-0718	EA	Eight-Channel, Multimode, Digitally Encoded Video With Bidirectional Data, Fiber Optics Transmitter (Pelco FT85081M)	5,403.64	56.50
28 21 31 00-0719		**Digitally Encoded Video With Bidirectional Data, Fiber Optics Receivers** *(28 21 31 00-0711)*		
28 21 31 00-0720	EA	Single-Channel, Single Mode, Digitally Encoded Video With Bidirectional Data, Fiber Optics Receiver (Pelco FR85011AS)	1,966.73	56.50

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 21 31 00-0721	EA	Single-Channel, Multimode, Digitally Encoded Video With Bidirectional Data, Fiber Optics Receiver (Pelco FR85011AM)	1,165.40	56.50
28 21 31 00-0722	EA	Four-Channel, Single Mode, Digitally Encoded Video With Bidirectional Data, Fiber Optics Receiver (Pelco FR85041S)	4,602.30	56.50
28 21 31 00-0723	EA	Four-Channel, Multimode, Digitally Encoded Video With Bidirectional Data, Fiber Optics Receiver (Pelco FR85041M)	3,982.10	56.50
28 21 31 00-0724	EA	Eight-Channel, Single Mode, Digitally Encoded Video With Bidirectional Data, Fiber Optics Receiver (Pelco FR85081S)	7,460.28	56.50
28 21 31 00-0725	EA	Eight-Channel, Multimode, Digitally Encoded Video With Bidirectional Data, Fiber Optics Receiver (Pelco FR85081M)	5,403.64	56.50
28 21 31 00-0726		**Video, Audio And Data, Fiber Optics Transmission Equipment** *(28 21 31 00-0678)*		
28 21 31 00-0727		**Digitally Encoded Video With Bidirectional Audio, Data And Contact Closure, Fiber Optics Transmitters** *(28 21 31 00-0726)*		
28 21 31 00-0728	EA	Single-Channel, Single Mode, Digitally Encoded Video With Bidirectional Audio, Data And Contact Closure, Fiber Optics Transmitter (Pelco FT86011S)	2,538.78	56.50
28 21 31 00-0729	EA	Single-Channel, Multimode, Digitally Encoded Video With Bidirectional Audio, Data And Contact Closure, Fiber Optics Transmitter (Pelco FT86011M)	2,016.02	56.50
28 21 31 00-0730		**Digitally Encoded Video With Bidirectional Audio, Data And Contact Closure, Fiber Optics Receivers** *(28 21 31 00-0726)*		
28 21 31 00-0731	EA	Single-Channel, Single Mode, Digitally Encoded Video With Bidirectional Audio, Data And Contact Closure, Fiber Optics Receiver (Pelco FR86011S)	2,538.78	56.50
28 21 31 00-0732	EA	Single-Channel, Multimode, Digitally Encoded Video With Bidirectional Audio, Data And Contact Closure, Fiber Optics Receiver (Pelco FR86011M)	2,016.02	56.50
28 21 31 00-0733		**Video Amplifiers** *(28 21 31 00-0662)*		
28 21 31 00-0734		**Video Distribution Amplifiers** *(28 21 31 00-0733)*		
28 21 31 00-0735	EA	1 Input, 4 Outputs, Video Distribution Amplifier (Pelco DA104DT)	311.41	14.13
28 21 31 00-0736	EA	16 Channel, Master, Video Distribution Amplifier (Pelco CM9760-MDA) Note: Inserts time-date and title on up to 16 video inputs.	2,562.94	14.13
28 21 31 00-0737		**Video Equalizing Amplifiers** *(28 21 31 00-0733)*		
28 21 31 00-0738	EA	Video Equalizing Amplifier (Pelco EA2010)	338.92	14.13
28 21 31 00-0739	EA	Half-Duplex, Video Equalizing Amplifier (Pelco EA2000)	534.96	14.13
28 21 31 00-0740		**Network Video Equipment** *(28 21 31 00-0044)*		
28 21 31 00-0741		**Video Encoders/Decoders** *(28 21 31 00-0740)*		
28 21 31 00-0742	EA	MPEG4 IP Video Receiver (Pelco NET300R)	1,254.81	28.25
28 21 31 00-0743	EA	MPEG4 IP Video Transmitter (Pelco NET300T)	1,254.81	28.25
28 21 31 00-0744	EA	MPEG4 IP Video Receiver With Audio (Pelco NET350R)	1,447.41	28.25
28 21 31 00-0745	EA	MPEG4 IP Video Transmitter With Audio And Local Storage (Pelco NET350T)	1,447.41	28.25
28 21 31 00-0746		**Network Video Recorders** *(28 21 31 00-0740)*		
28 21 31 00-0747	EA	16 Device Or 100MBPS, Network Video Recorder (Pelco NVR316)	8,052.97	56.50
28 21 31 00-0748	EA	32 Device Or 100MBPS, Network Video Recorder (Pelco NVR332)	9,374.77	56.50
28 21 31 00-0749	EA	64 Device Or 100MBPS, Network Video Recorder (Pelco NVR364)	12,020.66	56.50
28 21 31 00-0750	EA	64 Device Or 100MBPS, PelcoNet Network Video Recorder (Pelco NVR300)	7,953.23	56.50
28 21 31 00-0751		**Network Video Recorder Software** *(28 21 31 00-0740)*		
28 21 31 00-0752	EA	10 User, License Pack (Pelco VMX300-LIC-10)	797.89	
28 21 31 00-0753	EA	20 User, License Pack (Pelco VMX300-LIC-20)	1,438.73	
28 21 31 00-0754	EA	50 User, License Pack (Pelco VMX300-LIC-50)	3,195.02	
28 21 31 00-0755	EA	100 User, License Pack (Pelco VMX300-LIC-100)	5,588.70	
28 21 31 00-0756	EA	10 User, Enterprise License Pack (Pelco VMX300-E-LIC10)	1,332.12	
28 21 31 00-0757	EA	20 User, Enterprise License Pack (Pelco VMX300-E-LIC20)	2,395.98	
28 21 31 00-0758	EA	50 User, Enterprise License Pack (Pelco VMX300-E-LIC50)	5,325.03	
28 21 31 00-0759	EA	100 User, Enterprise License Pack (Pelco VMX300-E-LIC100)	9,316.79	
28 21 31 00-0760	EA	200 User, Enterprise License Pack (Pelco VMX300-E-LIC200)	15,970.50	
28 21 31 00-0761	EA	500 User, Enterprise License Pack (Pelco VMX300-E-LIC500)	33,270.82	
28 21 31 00-0762	EA	0 Analog Inputs, No Monitors, Video Management Client Software Installed On Pelco Workstation (Pelco VMX300-CL-0)	7,165.18	
28 21 31 00-0763	EA	1 Analog Inputs, No Monitors, Video Management Client Software Installed On Pelco Workstation (Pelco VMX300-CL-1)	7,608.84	
28 21 31 00-0764	EA	4 Analog Inputs, No Monitors, Video Management Client Software Installed On Pelco Workstation (Pelco VMX300-CL-4)	12,046.55	
28 21 31 00-0765	EA	0 Analog Inputs, No Monitors, Video Management Client/Server Software Installed On Pelco Workstation (Pelco VMX300-CSVR-0)	7,964.22	
28 21 31 00-0766	EA	1 Analog Input, No Monitors, Video Management Client/Server Software Installed On Pelco Workstation (Pelco VMX300-CSVR-1)	8,407.88	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 21 31 00-0767	EA	4 Analog Inputs, No Monitors, Video Management Client/Server Software Installed On Pelco Workstation (Pelco VMX300-CSVR-4)	12,843.30	
28 21 31 00-0768	EA	0 Analog Inputs, No Monitors, Enterprise Video Management Client Software Installed On Pelco Enterprise Workstation (Pelco VMX300-E-CL-0)	7,698.26	
28 21 31 00-0769	EA	1 Analog Input, No Monitors, Enterprise Video Management Client Software Installed On Pelco Enterprise Workstation (Pelco VMX300-E-CL-1)	8,143.06	
28 21 31 00-0770	EA	4 Analog Inputs, No Monitors, Enterprise Video Management Client Software Installed On Pelco Enterprise Workstation (Pelco VMX300-E-CL-4)	12,579.63	
28 21 31 00-0771	EA	0 Analog Inputs, No Monitors, Enterprise Video Management Client/Server Software Installed On Pelco Enterprise Workstation (Pelco VMX300-E-CSVR-0)	9,028.08	
28 21 31 00-0772	EA	1 Analog Input, No Monitors, Enterprise Video Management Client/Server Software Installed On Pelco Enterprise Workstation (Pelco VMX300-E-CSVR-1)	9,471.74	
28 21 31 00-0773	EA	4 Analog Inputs, No Monitors, Enterprise Video Management Client/Server Software Installed On Pelco Enterprise Workstation (Pelco VMX300-E-CSVR-4)	13,909.45	
28 21 31 00-0774		Video Recording Equipment *(28 21 31 00-0044)*		
28 21 31 00-0775		Digital Video Recorders *(28 21 31 00-0774)*		
28 21 31 00-0776	EA	8 Channel, 1TB Hard Drive, 8 Channel Audio, Digital Video Recorder With DVD (Pelco DX8108-1000A)	12,621.37	56.50
28 21 31 00-0777	EA	8 Channel, 2 TB Hard Drive, 8 Channel Audio, Digital Video Recorder With DVD (Pelco DX8108-2000A)	17,314.73	56.50
28 21 31 00-0778	EA	8 Channel, 3 TB Hard Drive, 8 Channel Audio, Digital Video Recorder With DVD (Pelco DX8108-3000A)	22,009.24	56.50
28 21 31 00-0779	EA	16 Channel, 1 TB Hard Drive, 16 Channel Audio, Digital Video Recorder With DVD (Pelco DX8116-1000A)	15,199.62	56.50
28 21 31 00-0780	EA	16 Channel, 2 TB Hard Drive, 16 Channel Audio, Digital Video Recorder With DVD (Pelco DX8116-2000A)	19,892.99	56.50
28 21 31 00-0781	EA	16 Channel, 3 TB Hard Drive, 16 Channel Audio, Digital Video Recorder With DVD (Pelco DX8116-3000A)	24,587.49	56.50
28 21 31 00-0782	EA	24 Channel, 1 TB Hard Drive, 24 Channel Audio, Digital Video Recorder With DVD (Pelco DX8124-1000A)	16,617.72	56.50
28 21 31 00-0783	EA	24 Channel, 2 TB Hard Drive, 24 Channel Audio, Digital Video Recorder With DVD (Pelco DX8124-2000A)	21,311.08	56.50
28 21 31 00-0784	EA	24 Channel, 3 TB Hard Drive, 24 Channel Audio, Digital Video Recorder With DVD (Pelco DX8124-3000A)	26,005.59	56.50
28 21 31 00-0785	EA	32 Channel, 1 TB Hard Drive, 32 Channel Audio, Digital Video Recorder With DVD (Pelco DX8132-1000A)	19,195.97	56.50
28 21 31 00-0786	EA	32 Channel, 2 TB Hard Drive, 32 Channel Audio, Digital Video Recorder With DVD (Pelco DX8132-2000A)	23,889.34	56.50
28 21 31 00-0787	EA	32 Channel, 3 TB Hard Drive, 32 Channel Audio, Digital Video Recorder With DVD (Pelco DX8132-3000A)	28,583.84	56.50
28 21 31 00-0788	EA	16 Channel, 30 IPS, Digital Video Recorder (Pelco DX9116F-1500)	13,934.34	56.50
28 21 31 00-0789		Digital Video Recorder Accessories *(28 21 31 00-0774)*		
28 21 31 00-0790	EA	16 Channel, Multiplexed Analog Output Display Card (Pelco DX8000-MUX16)	1,213.54	28.25
28 21 31 00-0791		Matrix Systems And Controls *(28 21 31 00-0044)*		
28 21 31 00-0792		Video Multiplexers *(28 21 31 00-0791)*		
28 21 31 00-0793		Monochrome Duplex, Video Multiplexers *(28 21 31 00-0792)*		
28 21 31 00-0794	EA	9 Channel, Monochrome Duplex, Video Multiplexer (Pelco MX4009MD)	2,307.21	56.50
28 21 31 00-0795	EA	16 Channel, Monochrome Duplex, Video Multiplexer (Pelco MX4016MD)	2,179.96	56.50
28 21 31 00-0796		Color Duplex, Video Multiplexers *(28 21 31 00-0792)*		
28 21 31 00-0797	EA	4 Channel, Color Duplex, Video Multiplexer (Pelco MX4004CD)	1,554.02	56.50
28 21 31 00-0798	EA	9 Channel, Color Duplex, Video Multiplexer (Pelco MX4009CD)	2,976.71	56.50
28 21 31 00-0799	EA	16 Channel, Color Duplex, Video Multiplexer (Pelco MX4016CD)	3,227.77	56.50
28 21 31 00-0800		Color Simplex, Video Multiplexers *(28 21 31 00-0792)*		
28 21 31 00-0801	EA	9 Channel, Monochrome Simplex, Video Multiplexer (Pelco MX4009CS)	2,499.80	56.50
28 21 31 00-0802	EA	16 Channel, Monochrome Simplex, Video Multiplexer (Pelco MX4016CS)	2,921.68	56.50
28 21 31 00-0803		Video Multiplexer Accessories *(28 21 31 00-0792)*		
28 21 31 00-0804	EA	Pushbutton/Joystick Desktop Controls For PTZ, Fixed/Variable-Speed, Multiplexer Controller (Pelco KBD4000)	1,364.94	38.58
28 21 31 00-0805	EA	Pushbutton Desktop Controls For PTZ, Fixed/Variable-Speed, Multiplexer Controller (Pelco KBD4002)	794.03	38.58
28 21 31 00-0806	EA	Video Multiplexer Server (Pelco MX4000SVR)	2,307.21	56.50
28 21 31 00-0807		Quad Video Processor *(28 21 31 00-0791)*		
28 21 31 00-0808	EA	Monochrome, Quad Video Processor (Pelco QD104M)	711.09	28.25
28 21 31 00-0809	EA	Color, Quad Video Processor (Pelco QD104C)	1,169.65	28.25
28 21 31 00-0810		Switcher *(28 21 31 00-0791)*		
28 21 31 00-0811		Terminating Manual Switchers *(28 21 31 00-0810)*		
28 21 31 00-0812		Terminating Manual Switchers *(28 21 31 00-0811)*		
28 21 31 00-0813	EA	4 Inputs, Terminating Manual Switcher (Pelco MS504DT)	243.53	22.60
28 21 31 00-0814	EA	8 Inputs, Terminating Manual Switcher (Pelco MS508DT)	332.95	22.60
28 21 31 00-0815	EA	12 Inputs, Terminating Manual Switcher (Pelco MS512DT)	406.32	22.60
28 21 31 00-0816	EA	18 Inputs, Terminating Manual Switcher (Pelco MS518DT)	668.84	22.60
28 21 31 00-0817		Audio Follow, Terminating Manual Switchers *(28 21 31 00-0811)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 21 31 00-0818	EA	4 Inputs, Audio Follow, Terminating Manual Switcher (Pelco MS504AF)	316.90	22.60
28 21 31 00-0819	EA	8 Inputs, Audio Follow, Terminating Manual Switcher (Pelco MS508AF)	563.37	22.60
28 21 31 00-0820	EA	18 Inputs, Audio Follow, Terminating Manual Switcher (Pelco MS518AF)	988.69	22.60
28 21 31 00-0821		**Balanced Audio Follow, Terminating Manual Switchers** *(28 21 31 00-0811)*		
28 21 31 00-0822	EA	4 Inputs, Balanced Audio Follow, Terminating Manual Switcher (Pelco MS504BAF)	425.80	22.60
28 21 31 00-0823	EA	8 Inputs, Balanced Audio Follow, Terminating Manual Switcher (Pelco MS508BAF)	785.77	22.60
28 21 31 00-0824		**Looping Manual Switchers** *(28 21 31 00-0810)*		
28 21 31 00-0825		**Looping Manual Switchers** *(28 21 31 00-0824)*		
28 21 31 00-0826	EA	4 Inputs, Looping Manual Switcher (Pelco MS504LDT)	273.33	22.60
28 21 31 00-0827	EA	8 Inputs, Looping Manual Switcher (Pelco MS508LDT)	377.66	22.60
28 21 31 00-0828	EA	12 Inputs, Looping Manual Switcher (Pelco MS512LDT)	483.12	22.60
28 21 31 00-0829	EA	18 Inputs, Looping Manual Switcher (Pelco MS518LDT)	800.68	22.60
28 21 31 00-0830		**Audio Follow, Looping Manual Switchers** *(28 21 31 00-0824)*		
28 21 31 00-0831	EA	4 Inputs, Audio Follow, Looping Manual Switcher (Pelco MS504AFL)	342.12	22.60
28 21 31 00-0832	EA	8 Inputs, Audio Follow, Looping Manual Switcher (Pelco MS508AFL)	602.35	22.60
28 21 31 00-0833	EA	12 Inputs, Audio Follow, Looping Manual Switcher (Pelco MS512AFL)	829.34	22.60
28 21 31 00-0834		**Balanced Audio Follow, Looping Manual Switchers** *(28 21 31 00-0824)*		
28 21 31 00-0835	EA	4 Inputs, Balanced Audio Follow, Looping Manual Switcher (Pelco MS504BAFL)	456.76	22.60
28 21 31 00-0836	EA	8 Inputs, Balanced Audio Follow, Looping Manual Switcher (Pelco MS508BAFL)	832.78	22.60
28 21 31 00-0837	EA	12 Inputs, Balanced Audio Follow, Looping Manual Switcher (Pelco MS512BAFL)	1,049.45	22.60
28 21 31 00-0838		**Sequential Switchers** *(28 21 31 00-0810)*		
28 21 31 00-0839		**Single Output, Sequential Switchers** *(28 21 31 00-0838)*		
28 21 31 00-0840	EA	4 Inputs, Single Output, Sequential Desktop Switcher (Pelco VA6104)	484.27	22.60
28 21 31 00-0841	EA	8 Inputs, Single Output, Sequential Desktop Switcher (Pelco VA6108)	725.02	22.60
28 21 31 00-0842		**Dual Outputs, Sequential Switchers** *(28 21 31 00-0838)*		
28 21 31 00-0843	EA	4 Inputs, Dual Outputs, Sequential Desktop Switcher (Pelco VA6204)	606.94	22.60
28 21 31 00-0844	EA	8 Inputs, Dual Outputs, Sequential Desktop Switcher (Pelco VA6208)	843.09	22.60
28 21 31 00-0845		**Controls** *(28 21 31 00-0791)*		
28 21 31 00-0846		**Direct/Multi-Cable Controls** *(28 21 31 00-0845)*		
28 21 31 00-0847	EA	Scanner Control Module (Pelco MPS524DT)	406.48	56.50
28 21 31 00-0848	EA	120 Volt AC Pan/Tilt Control Module (Pelco MPT115DT)	435.14	56.50
28 21 31 00-0849	EA	24 Volt AC Pan/Tilt Control Module (Pelco MPT24DT)	484.43	56.50
28 21 31 00-0850	EA	Motorized Zoom Lens Control Module (Pelco MLZ6DT)	507.36	56.50
28 21 31 00-0851	EA	120 Volt AC Pan/Tilt, Scanner And Lens Control Module (Pelco MPTAZ115DT)	810.01	56.50
28 21 31 00-0852	EA	24 Volt AC Pan/Tilt, Scanner And Lens Control Module (Pelco MPTAZ24DT)	893.70	56.50
28 21 31 00-0853		**Coaxitron Controls** *(28 21 31 00-0845)*		
28 21 31 00-0854	EA	Desktop Keyboard, Fixed Speed Coaxitron Controller And Transmitter (Pelco KBD9000)	580.80	38.58
28 21 31 00-0855	EA	8 Position Joystick Pan/Tilt Controls, Switch Camera Lens Controls, Desktop Coaxitron Controller And Transmitter (Pelco MPT9000)	1,120.76	38.58
28 21 31 00-0856	EA	Integral Switcher, 8 Position Joystick Pan/Tilt Controls, Switch Camera Lens Controls, Desktop Coaxitron Controller And Transmitter (Pelco MPT9008)	1,275.52	38.58
28 21 31 00-0857		**Digital Controls** *(28 21 31 00-0845)*		
28 21 31 00-0858	EA	Pushbutton Desktop Controls For Pan/Tilt/Zoom, Fixed/Variable-Speed, Digital Controller (Pelco KBD200A)	788.30	38.58
28 21 31 00-0859	EA	Pushbutton/Joystick Desktop Controls For Pan/Tilt/Zoom, Fixed/Variable-Speed, Digital Controller (Pelco KBD300A)	1,353.47	38.58
28 21 31 00-0860		**Lock Boxes** *(28 21 31 00-0791)*		
28 21 31 00-0861	EA	VCR Lock Box (Pelco LB1000)	484.84	42.38
		For Wall Mount, Add	*165.00*	
28 21 31 00-0862	EA	Computer Disk Drive Lock Box (Pelco LB2000)	496.31	42.38
28 21 31 00-0863	EA	VCR And Multiplexer Lock Box (Pelco LB3000) Note: Includes storage for 32 VCR tapes.	920.48	42.38
28 21 31 00-0864		**Test And Certification Of Surveillance Camera System** *(28 21 31)*		
28 21 31 00-0865	DAY	Test And Certification Of Surveillance Camera System To Tie Into Existing Systems	896.26	
28 21 31 00-0866	HR	Test And Certification Of Surveillance Camera System	280.08	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 21 31 00-0867		Programming Of Surveillance Camera System *(28 21 31)*		
28 21 31 00-0868	HR	Programming Of Surveillance Camera (CCTV) System	224.06	
28 21 31 00-0869		Removal And Reinstallation Of Cameras *(28 21 31)* Note: Includes storage, cleaning and supply materials.		
28 21 31 00-0870	EA	Removal And Reinstallation Of Camera System	508.50	

28 40 Life Safety *(28)*

Note: Includes testing of new devices and certification.

28 41 Radiation Detection and Alarm *(28 40)*

28 41 15 Radiation Detection Sensors *(28 41)*

28 41 15 00-0001		Wall Mount, Battery Operated, Home Radon Detector *(28 41 15)* Note: Long term and 7 day average display.		
28 41 15 00-0002	EA	Wall Mount, Battery Operated, Home Radon Detector	219.51	

28 42 Gas Detection and Alarm *(28 40)*

28 42 11 Gas Detection and Alarm Control, GUI, and Logic Systems *(28 42)*

28 42 11 00-0001		Monitoring System For Underground Tanks *(28 42 11)*		
28 42 11 00-0002		Continuous Leak Detection System *(28 42 11 00-0001)* Note: Includes calibration, electronic control module and probes. Excludes sample wells, electrical power supply and sensor cable.		
28 42 11 00-0003	EA	Single Channel Underground Tank Monitoring System	8,488.34	462.48
28 42 11 00-0004	EA	2 Channel Underground Tank Monitoring System	11,453.85	617.02
28 42 11 00-0005	EA	3 Channel Underground Tank Monitoring System	16,237.55	661.01
28 42 11 00-0006	EA	4 Channel Underground Tank Monitoring System	17,384.87	924.96
28 42 11 00-0007	EA	Control Panel, 1-8 Tanks, Single Wall Tank Monitoring System	12,300.93	78.96
28 42 11 00-0008	EA	Control Panel, 1-4 Tanks, Double Wall Tank Monitoring System	11,093.05	70.50
28 42 11 00-0009	EA	Control Panel, 1-8 Tanks, Double Wall Tank Monitoring System	14,589.06	78.96
28 42 11 00-0010	EA	Tank Leak Detection Probe	4,517.12	16.92
28 42 11 00-0011	EA	Secondary Containment Collar Probe	550.71	6.77
28 42 11 00-0012	EA	Interstitial Leak Detection Probe	1,009.17	14.10
28 42 11 00-0013	EA	Liquid Phase Detection	3,331.03	42.30
28 42 11 00-0014	EA	Hydrocarbon Vapor, Fixed	3,074.20	42.30
28 42 11 00-0015	EA	Hydrocarbon Vapor, Float Mounted	3,593.21	47.94
28 42 11 00-0016	EA	Liquid And Vapor Hydrocarbon	4,106.87	47.94

28 42 15 Gas Detection Sensors *(28 42)*

28 42 15 00-0001		Hydrogen Gas Detection *(28 42 15)*		
28 42 15 00-0002	EA	Hydrogen Gas Detector Sensor, 1% Fan Relay, 2% Alarm (SBS HGDI-DR)	2,115.77	42.38
28 42 15 00-0003	EA	Hydrogen Gas Detector Junction Box (SBS HGDI-JB)	107.68	14.13
28 42 15 00-0004	EA	Remote Display With 25' Cable For Hydrogen Gas Detector (SBS HGDI-REM)	527.26	42.38

28 43 Fuel Oil Detection and Alarm *(28 40)*

See CSI section 28 42 00 00-0000 for detection and alarms.

28 46 Fire Detection and Alarm *(28 40)*

28 46 13 Fire-Alarm Systems *(28 46)*

28 46 13 31 Proprietary Supervising-Station Fire-Alarm Systems *(28 46 13)*

Note: Includes programming of equipment, testing and certification of new devices.

28 46 13 31-0001		Bosch Fire Alarm Equipment *(28 46 13 31)*		
28 46 13 31-0002	EA	Fire (Red) Keypad (Bosch D1255RB)	437.28	56.50
28 46 13 31-0003	EA	Fire Alarm Communication Alarm Panel (Bosch D7412GV4)	985.92	225.99
28 46 13 31-0004	EA	Fire Alarm (Red) Enclosure (Bosch D8109)	255.08	42.38
28 46 13 31-0005	EA	Dual Phone Line Switcher (Bosch D928)	202.43	22.60
28 46 13 31-0006	EA	Phone Cords (Bosch D161/D162)	24.40	5.65
28 46 13 31-0007	EA	Dual battery Harness (Bosch D122)	29.51	5.65
28 46 13 31-0008	EA	Battery Charging Module (Bosch D8132)	246.76	22.60
28 46 13 31-0009	EA	7 AH, 12 Volt Battery (Bosch D126)	79.85	14.13
28 46 13 31-0010	EA	Transformer (Bosch D1640)	33.90	5.65
28 46 13 31-0011	EA	Transformer Kit (Bosch D8004)	114.32	11.30
28 46 13 31-0012	EA	Phone Jack, Modular (Bosch D166/RJ31X)	24.40	5.65
28 46 13 31-0013		Edwards Fire Alarm *(28 46 13 31)*		
28 46 13 31-0014		EST3 Life Safety And Security Control *(28 46 13 31-0013)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-0015		**EST3 Network** *(28 46 13 31-0014)*		
28 46 13 31-0016		**Remote Annunciators** *(28 46 13 31-0015)*		
28 46 13 31-0017	EA	Remote LCD Command Module Annunciator (EST3 3-LCDANN) Note: Includes LCD display, CPU and doors. Order surface or semi-flush mount wallbox separately.	1,692.33	84.75
28 46 13 31-0018	EA	Six Position Base Annunciator (EST3 3-6ANN) Note: Includes door, CPU card, two annunciator support modules and five blank filler plates. Space provided for up to four Control/Display Modules and one 3-LCD Liquid Crystal Display Module.	1,373.76	84.75
28 46 13 31-0019	EA	Ten Position Base Annunciator (EST3 3-10ANN) Note: Includes door, CPU card, two annunciator support modules and nine blank filler plates. Space provided for up to eight Control/Display Modules and one 3-LCD Liquid Crystal Display Module.	1,745.23	84.75
28 46 13 31-0020	EA	Annunciator CPU (EST3 3-ANNCPU3) Note: One Required per graphic annunciator.	1,101.84	84.75
28 46 13 31-0021	EA	Annunciator Support Module (EST3 3-ANNSM) Note: Takes one space in Annunciator box. Supports one Control/Display module.	198.38	28.25
28 46 13 31-0022	EA	Liquid Crystal Display Module (EST3 3-LCD) Note: Mounts over 3-CPU(1).	697.99	84.75
28 46 13 31-0023	EA	Liquid Crystal Display Module (EST3 3-LCDXL) Note: Mounts over 3-ANNCPU plus two spaces.	831.89	84.75
28 46 13 31-0024	EA	LED/SWITCH Driver Module Assembly For Third Part Graphics (EST3 3-EVDVRA) Note: Assembled version of 3-EVDVR, comes packaged with cables, mounting hardware installation instructions used for third party graphics. Mounts in 3-EVDVRX.	791.11	84.75
28 46 13 31-0025	EA	Power Supply Assembly With 19" Rail Mounting Chassis Assembly (EST3 3-EVPWRA) Note: Assembled version of 3-EVPWR, comes packaged with cables, mounting hardware and mounting plate for 3-ANNCPU1. Used for third party graphics.	936.60	56.50
28 46 13 31-0026	EA	Plastic Mounting Extrusion 19" Mounting (EST3 3-EVDVRX) Note: Mounts up to three 3-EVDVRA modules.	135.14	28.25
28 46 13 31-0027	EA	Central Processor Unit Module (EST3 3-CPU3) Note: Includes LCD display, CPU and doors. Order surface or semi-flush mount wallbox separately.	2,009.54	84.75
28 46 13 31-0028	EA	120 Volt AC, 50/60 Hertz, Primary Power Supply With Local Rail Module (EST3 3-CPU3) Note: Includes LCD display, CPU and doors. Order surface or semi-flush mount wallbox separately.	1,789.46	28.25
28 46 13 31-0029		**Remote Annunciators Cabinets** *(28 46 13 31-0015)*		
28 46 13 31-0030	EA	Remote LCD Command Module Flush Mount LCD Wallbox (EST3 RLCM/B)	146.45	28.25
28 46 13 31-0031	EA	Remote LCD Command Module Surface Mount LCD Wallbox (EST3 RLCM/B-S)	135.15	22.60
28 46 13 31-0032	EA	Six Position LED/LCD Flush Wallbox (EST3 6ANN/B)	166.41	28.25
28 46 13 31-0033	EA	Six Position LED/LCD Surface Wallbox (EST3 6ANN/B-S)	155.11	22.60
28 46 13 31-0034	EA	Ten Position LED/LCD Flush Wallbox (EST3 10ANN/B)	185.13	28.25
28 46 13 31-0035	EA	Ten Position LED/LCD Surface Wallbox (EST3 10ANN/B-S)	173.83	22.60
28 46 13 31-0036		**Audio And Telephone Masters** *(28 46 13 31-0015)*		
28 46 13 31-0037	EA	Audio Source Unit With Local Microphone And Firefighters' Telephone (EST3 3-ASU/FT)	5,571.36	113.00
28 46 13 31-0038	EA	Audio Source Unit With Local Microphone (Provides Four Local Rail Spaces) (EST3 3-ASU/4)	3,085.22	113.00
28 46 13 31-0039	EA	Audio Source Unit With Local Microphone And Inner Door Filler Plate (EST3 3-ASU)	2,399.38	113.00
28 46 13 31-0040	EA	Fire Fighters Telephone Control Unit With Inner Door Filler Plate (EST3 3-FTCU)	2,914.28	113.00
28 46 13 31-0041	EA	Audio Source Unit Memory Expansion, 100 Minutes (EST3 3-ASUMX/100)	3,333.75	113.00
28 46 13 31-0042	EA	Zoned Amplifier, 95 Watt, Class B. 95 Watt Selectable For 25 Or 70 Vrms Class B Output. Mounts In 2 LRM Spaces (EST3 3-ZA95)	2,399.67	56.50
28 46 13 31-0043		**Battery Distribution Unit** *(28 46 13 31-0015)*		
28 46 13 31-0044	EA	Battery Distribution Unit (EST3 3-BTSEN)	580.29	467.30
28 46 13 31-0045		**Remote Booster Power Supply** *(28 46 13 31-0015)*		
28 46 13 31-0046	EA	6.5 Amperes, 120 Volt AC, Booster Power Supply (EST3 BPS6A)	946.53	84.75
28 46 13 31-0047	EA	10 Amperes, 110 Volt AC Booster Power Supply (EST3 BPS10)	1,084.78	84.75
28 46 13 31-0048	EA	10 Amperes, 220 Volt AC Booster Power Supply (EST3 BPS10220)	1,186.66	84.75
28 46 13 31-0049	EA	Tamper Switch - For CAB7, 14 And 21 Series Cabinets (EST3 3-TAMP)	149.79	28.25
28 46 13 31-0050		**Batteries And Battery Cabinets** *(28 46 13 31-0015)*		
28 46 13 31-0051	EA	1.2 Ampere Hours, 12 Volt DC, Sealed Lead Acid Battery (EST3 12V1A2 1.2 Ampere Hours)	111.83	28.25
28 46 13 31-0052	EA	4 Ampere Hours, 12 Volt DC, Sealed Lead Acid Battery (EST3 12V4A 4.5 Ampere Hours)	141.86	28.25
28 46 13 31-0053	EA	24 Ampere Hours, 12 Volt DC, Sealed Lead Acid Battery (EST3 12V24A 26 Ampere Hours)	349.08	28.25
28 46 13 31-0054	EA	6.5 Ampere Hours, 12 Volt DC, Sealed Lead Acid Battery (EST3 12V6A5 7.2 Ampere Hours)	153.89	28.25
28 46 13 31-0055	EA	40 Ampere Hours, 12 Volt DC, Sealed Lead Acid Battery (EST3 12V40A 40 Ampere Hours)	445.27	28.25
28 46 13 31-0056	EA	10 Amperes Hours, 12 Volt DC, Sealed Lead Acid Battery (EST3 12V10A 11 Ampere Hours)	246.14	28.25
28 46 13 31-0057	EA	50 Ampere Hours, 12 Volt DC, Sealed Lead Acid Battery (EST3 12V50A 50 Ampere Hours)	913.95	28.25
28 46 13 31-0058	EA	17 Ampere Hours, 12 Volt DC, Sealed Lead Acid Battery (EST3 12V17A 18 Ampere Hours)	252.34	28.25
28 46 13 31-0059	EA	65 Ampere Hours, 12 Volt DC, Sealed Lead Acid Battery (EST3 12V65A 65 Amp Hours)	1,102.40	28.25
28 46 13 31-0060	EA	8 Ampere Hours, 6 Volt DC, Sealed Lead Acid Battery (EST3 6V8A 8 Amp Hours)	136.01	28.25
28 46 13 31-0061	EA	10 Ampere Hours, 6 Volt DC, Sealed Lead Acid Battery (EST3 6V10A 12 Amp Hours)	121.00	28.25
28 46 13 31-0062	EA	14" x 18-1/4" x 7-1/4" Free Standing Battery Cabinet With Key Lock (EST3 BC-1) Note: Supports up to 40 Ah batteries will hold up to two 12V24A batteries.	448.08	56.50
28 46 13 31-0063	EA	22" x 15" x 3-3/4" Grey Battery Cabinet (EST3 BC-2) Note: Holds up to two 12V17A batteries.	367.19	56.50
28 46 13 31-0064	EA	Remote Closet Enclosure (EST3 3-RCC7R)	1,282.75	113.00
28 46 13 31-0065	EA	Remote Closet Enclosure (EST3 3-RCC14R)	1,601.22	113.00

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-0066	EA	Remote Closet Enclosure (EST3 3-RCC21R)	2,261.62	113.00
28 46 13 31-0067		**Serial Printer** *(28 46 13 31-0015)*		
28 46 13 31-0068	EA	System Printer - Desk Top Style (EST3 PT-1S)	1,255.10	28.25
28 46 13 31-0069		**Intelligent Analog Initiating Devices** *(28 46 13 31-0014)*		
28 46 13 31-0070		**Detectors, Signature** *(28 46 13 31-0069)*		
28 46 13 31-0071	EA	Intelligent 4D Multisensor Detector For Ionization, Photoelectric, And Heat (EST3 SIGA-IPHS)	265.91	42.38
28 46 13 31-0072	EA	Black, Intelligent 4D Multisensor Detector For Ionization, Photoelectric, And Heat (EST3 SIGA-IPHSB)	300.87	42.38
28 46 13 31-0073	EA	Intelligent Multisensor Detector - Photoelectric, Heat (Edwards SIGA-PHD)	201.87	42.38
28 46 13 31-0074	EA	Intelligent Photoelectric Smoke Detector, Duct Mounted (Edwards SIGA-PD)	179.79	42.38
28 46 13 31-0075	EA	Intelligent Ionization Smoke Detector (EST3 SIGA-IS)	234.66	42.38
28 46 13 31-0076	EA	Intelligent Fixed Temperature / Rate-of-Rise Heat Detector - 135F, 15F Per Minute (Edwards SIGA-HRD)	156.75	42.38
28 46 13 31-0077	EA	Intelligent Fixed Temperature Heat Detector - 135 Degree F (Edwards SIGA-HFD)	156.75	42.38
28 46 13 31-0078	EA	Passive Infrared Motion Detector (EST3 SIGA-MD)	310.17	42.38
28 46 13 31-0079	EA	Passive Infrared Motion Detector With Swivel Mount For Single Gang Boxes (EST3 SIGA-MDS)	344.30	42.38
28 46 13 31-0080	EA	Intelligent Photoelectric Smoke Detector (EST3 SIGA2-PS)	287.82	42.38
28 46 13 31-0081	EA	Intelligent Combination Photo Electric And CO Sensor (EST3 SIGA2-PCOS)	423.28	42.38
28 46 13 31-0082	EA	135 Degree Fahrenheit, Intelligent Fixed Temperature Heat Detector (EST3 SIGA2-HFS)	237.27	42.38
28 46 13 31-0083	EA	135 Degrees Fahrenheit, 15 Degrees Fahrenheit Per Minute, Intelligent Fixed Temperature/Rate-of-Rise Heat Detector (EST3 SIGA2-HRS)	237.27	42.38
28 46 13 31-0084	EA	Photoelectric, Heat, Intelligent 3D Multisensor Detector (EST3 SIGA2-PHS)	333.34	42.38
28 46 13 31-0085		**Detectors, Duct Housings and Accessories, Signature** *(28 46 13 31-0069)*		
28 46 13 31-0086	EA	Superduct, Signature Duct Smoke Detector (EST3 SIGA-SD)	543.74	70.62
28 46 13 31-0087	EA	Superduct, Test Magnet Kit (EST3 SD-MAG)	21.49	
28 46 13 31-0088	EA	Superduct, 120" Air Sample Tube (EST3 SD-T120)	68.57	16.95
28 46 13 31-0089	EA	Superduct, Remote Test Station, Keyed, 2-Wire And SIGA (EST3 SD-TRK)	140.43	22.60
28 46 13 31-0090	EA	Duct Smoke Detector Test Station, 2-Gang Plastic Plate With Key Switch, 2 Keys, Use With Duct Detector Only (EST3 SIGA-DTS)	193.30	22.60
28 46 13 31-0091	EA	High Temp Heat Detector, 194 Degree F, Combination Rate-Of-Rise And Fixed Temperature (EST3 282B-PL)	80.10	22.60
28 46 13 31-0092		**Modules, Signature** *(28 46 13 31-0069)*		
28 46 13 31-0093	EA	Universal Class A/B Module - UIO Mount (EST3 SIGA-MAB)	255.04	28.25
28 46 13 31-0094	EA	Class B Single Input Module (One Gang Standard Mount) (EST3 SIGA-CT1)	129.46	28.25
28 46 13 31-0095	EA	Class B Dual Input Module (One Gang Standard Mount) (EST3 SIGA-CT2)	180.34	28.25
28 46 13 31-0096	EA	Class B Dual Input UIO (Plug In) Module (EST3 SIGA-MCT2)	227.17	28.25
28 46 13 31-0097	EA	Single Input (Riser) Module, Features A Built-In Ring Tone Generator, Use For Switching A Single Signal Or Audio Circuit (EST3 SIGA-CC1)	199.54	28.25
28 46 13 31-0098	EA	Dual Input (Riser) Module, Use For Switching (Selecting) Either Of Two Signal Or Audio Input Circuits To One Signal Output Circuit (EST3 SIGA-CC2)	210.10	28.25
28 46 13 31-0099	EA	Control Relay Module (One Gang Standard Mount) (EST3 SIGA-CR) Note: Select for either N.O. or N.C. operation. Rated at 2 amperes (24 Volt DC).	156.34	28.25
28 46 13 31-0100	EA	Control Relay UIO (Plug In) Module (EST3 SIGA-MCR)	195.99	28.25
28 46 13 31-0101	EA	Single Input (Riser) Module With Strobe Synchronization Output (EST3 SIGA-CC1S)	265.63	28.25
28 46 13 31-0102	EA	Universal Input/Output Module - Input With Programmable Output (EST3 SIGA-IO)	258.64	28.25
28 46 13 31-0103	EA	Input/Output Module - UIO Mount, Multifunction Module With Input And Program (EST3 SIGA-MIO)	248.22	28.25
28 46 13 31-0104	EA	Waterflow/Tamper Module (One Gang Standard Mount) (EST3 SIGA-WTM)	226.62	198.37
28 46 13 31-0105	EA	Monitor Module (One Gang Standard Mount) (EST3 SIGA-MM1) Note: Factory programmed for non-latching monitor operation.	162.79	28.25
28 46 13 31-0106	EA	Single Input (Riser) Module, With Synchronization Output (EST3 SIGA-MCC1S)	266.77	28.25
28 46 13 31-0107		**Module Accessories, Signature** *(28 46 13 31-0069)* Note: Universal I/O motherboards are required for UIO plug-in modules. Module mounting plates can be used to mount multiple 1 and 2-gang modules.		
28 46 13 31-0108	EA	Module Mounting Bracket - For 4" Square Box, Mounting Kit Allows Installing 2 Single Gang Signature Modules Into A Single 4" Square Box (EST3 SIGA-MB4)	63.24	14.13
28 46 13 31-0109	EA	Universal Input/Output Module Motherboard - 6 Position, Use For M Series Modules (EST3 SIGA-UIO6)	223.79	28.25
28 46 13 31-0110	EA	Transient Protector - For Bell And Horn Circuits, Provides Transient Protection To -CC1, -MCC1, -CC2, -MCC2, -UM And -MAB Modules (EST3 235196P)	22.16	8.48
28 46 13 31-0111	EA	Signature Module Mounting Plate, 1 Footprint, Space For Up To Four 2-Gang Signature Modules Or Eight 1-Gang Signature Modules (EST3 SIGA-MP1)	75.29	14.13
28 46 13 31-0112	EA	Signature Module Mounting Plate, 1/2 Footprint, Space For Up To Two 2-Gang Signature Modules Or Four 1-Gang Signature Modules (EST3 SIGA-MP2)	66.64	14.13
28 46 13 31-0113	EA	Signature Module Mounting Plate, 1/2 Extended Footprint, Space For Up To Three 2-Gang Signature Modules Or Six 1-Gang Signature Modules (EST3 SIGA-MP2L)	70.06	14.13
28 46 13 31-0114		**Single Action Pull Stations, Signature** *(28 46 13 31-0069)*		
28 46 13 31-0115	EA	One Stage Fire Alarm Station, English Markings (EST3 SIGA-270)	269.88	58.76
28 46 13 31-0116	EA	Two Stage (Pre Signal) Fire Alarm Station, English Markings (EST3 SIGA-270P)	322.13	58.76
28 46 13 31-0117	EA	GA Key - For Pre Signal Station (EST3 276-K2)	37.83	32.18
28 46 13 31-0118	EA	20 Glass Rods For SIGA-270 Series Stations (EST3 270-GLR)	47.90	42.25
28 46 13 31-0119	EA	Surface Mount Box, Red - For SIGA-270 Series (EST3 276B-RSB)	67.77	45.17

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-0120		**Double Action Pull Stations, Signature** *(28 46 13 31-0069)*		
28 46 13 31-0121	EA	Double Action (One Stage) Fire Alarm Station, English Markings (EST3 SIGA-278)	227.24	58.76
28 46 13 31-0122	EA	12 Glass Rods For SIGA-278 Series (EST3 276-GLR)	48.65	5.65
28 46 13 31-0123		**Detector Bases and Accessories, Signature** *(28 46 13 31-0069)* Note: For raised floor and plenum applications. Order detector mounting base and detector separately. Compatible with -PS, and -PHS detectors and -SB, -RB and -IB bases.		
28 46 13 31-0124	EA	Audible (Sounder) Base (EST3 SIGA-AB4G)	140.54	14.13
28 46 13 31-0125	EA	Surface Box - For Sounder Base, Use With -AB4G Models Only (EST3 AB4G-SB)	49.25	14.13
28 46 13 31-0126	EA	Audible (Sounder) Base, Mounts To 4" Square, 2-1/8" Deep Box (EST3 SIGA-AB4)	176.80	14.13
28 46 13 31-0127	EA	Detector (Smoke) Guard, Covers Detectors Mounted To Flush Boxes, Compatible With -IPHS And -PS Signature Detectors (EST3 SIGA-DG)	98.06	14.13
28 46 13 31-0128	EA	Detector (Smoke) Guard Surface Box - For SIGA-DG (EST3 SIGA-DGSB)	115.47	14.13
28 46 13 31-0129	EA	Detector Mounting Plate (EST3 SIGA-DMP) Note: For raised floor and plenum applications. Order detector mounting base and detector separately. Compatible with -PS, -PHS and -IPHS detectors and -SB, -RB and -IB bases. SIGA-IPHS 4D detector is limited to operation in air velocities less than 500 feet per minute.	185.13	14.13
28 46 13 31-0130	EA	Remote Alarm LED, Use With -SB And -SB4 Standard Base Only (EST3 SIGA-LED)	63.24	14.13
28 46 13 31-0131	EA	Trim Skirt/Ring - For Octagon Box (EST3 SIGA-TS)	22.31	8.48
28 46 13 31-0132	EA	Trim Skirt/Ring - For 4" Square Box, Use To Hide Imperfections Around Electric Boxes Not Completely Hidden By Standard Bases, With All 4" Bases (EST3 SIGA-TS4)	22.31	8.48
28 46 13 31-0133	EA	Detector (Smoke) Guard Mounting Flange, Provides Secure Mounting While Offering Easy Guard Removal, With Tamper Hardware (EST3 SIGA-DGMF)	69.35	8.48
28 46 13 31-0134	EA	Detector Base With Isolator (EST3 SIGA-IB)	113.71	14.13
28 46 13 31-0135	EA	Detector Base With Isolator - For 4" Square Box, With TS4 Skirt (EST3 SIGA-IB4)	121.17	14.13
28 46 13 31-0136	EA	Detector Base With Form 'C' Relay (EST3 SIGA-RB)	78.17	14.13
28 46 13 31-0137	EA	Detector Base With Form 'C' Relay - For 4" Square Box, With TS4 Skirt (EST3 SIGA-RB4)	100.69	14.13
28 46 13 31-0138	EA	Detector Base - Standard, For 4" Square Box, With TS4 Skirt (EST3 SIGA-SB4)	44.57	14.13
28 46 13 31-0139		**Controllers, Signature** *(28 46 13 31-0069)*		
28 46 13 31-0140	EA	Signature Dual Driver Controller (EST3 3-SDDC1)	3,994.25	84.75
28 46 13 31-0141	EA	Single Signature Loop Controller (EST3 3-SSDC1)	2,277.23	84.75
28 46 13 31-0142	EA	Signature Loop Controller (EST3 3-SDC1)	2,042.86	84.75
28 46 13 31-0143	EA	Analog Addressable Loop Controller (EST3 3-AADC1)	3,291.77	84.75
28 46 13 31-0144		**Relays And Accessories** *(28 46 13 31-0069)*		
28 46 13 31-0145	EA	Multi Voltage Relay (EST3 MR101)	203.93	28.25
28 46 13 31-0146	EA	Single SPDT Auxiliary Relay With LED Track Mounting (EST3 MR101/T)	58.80	14.13
28 46 13 31-0147		**Notification Appliances** *(28 46 13 31-0014)*		
28 46 13 31-0148		**Wall Strobes, Horns And Chimes** *(28 46 13 31-0147)*		
28 46 13 31-0149	EA	Strobe (15, 30, 75, Or 110 cd Output), White (EST3 G1-VM)	159.22	42.38
28 46 13 31-0150	EA	Strobe (15, 30, 75, Or 110 cd Output), Red (EST3 G1R-VM)	159.22	42.38
28 46 13 31-0151	EA	Horn-Strobe (15, 30, 75, Or 110 cd Output, High Or Low dB Output), White (EST3 G1-HDVM)	183.47	42.38
28 46 13 31-0152	EA	Temporal Horn (Selectable High Or Low dB Output), White (EST3 G1-HD)	131.89	42.38
28 46 13 31-0153	EA	Temporal Horn (Selectable High Or Low dB Output), Red (EST3 G1R-HD)	131.89	42.38
28 46 13 31-0154	EA	Temporal Horn, Hi/Lo dB Output, 24 Volt DC, White, With The Word "FIRE" On Housing (EST3 G1F-HD)	131.89	42.38
28 46 13 31-0155	EA	Temporal Horn, Hi/Lo dB Output, 24 Volt DC, Red, With The Word "FIRE" On Housing (EST3 G1RF-HD)	131.89	42.38
28 46 13 31-0156	EA	Horn (Steady Tone), 24 Volt DC, White, Not Compatible With Signal Master (EST3 G1-P)	108.93	42.38
28 46 13 31-0157	EA	Horn (Steady Tone) - 24 Volt DC, Red, Not Compatible With Signal Master (EST3 G1R-P)	108.93	42.38
28 46 13 31-0158	EA	Horn (Steady Tone), 24 Volt DC, Red, With The Word "FIRE" On Housing, Not Compatible With Signal Master (EST3 G1RF-P)	108.93	42.38
28 46 13 31-0159	EA	Genesis Chime-Strobe (15, 30, 75, Or 110 cd Output, High Or Low dB Output), White (EST3 G1-CVM)	282.47	42.38
28 46 13 31-0160	EA	Genesis Chime-Strobe (15, 30, 75, Or 110 cd Output, High Or Low dB Output), Red (EST3 G1R-CVM)	282.47	42.38
28 46 13 31-0161	EA	Genesis Chime (Selectable High Or Low dB Output), White (EST3 G1-C)	180.52	42.38
28 46 13 31-0162	EA	Genesis Chime (Selectable High Or Low dB Output), Red (EST3 G1R-C)	180.52	42.38
28 46 13 31-0163	EA	Wall Strobe, 15/75 cd, White, With The Word "FIRE" On Housing (EST3 G1F-V1575)	159.22	42.38
28 46 13 31-0164	EA	Multi-cd Strobe, 24 Volt DC, White, With The Word "FIRE" On Housing (EST3 G1F-VM)	159.22	42.38
28 46 13 31-0165	EA	Multi-Candela Strobe, 24 Volt DC, Red, With The Word "FIRE" On Housing (EST3 G1RF-VM)	159.22	42.38
28 46 13 31-0166	EA	Wall Strobe, 15/75 cd, Red, With The Word "FIRE" On Housing (EST3 G1RF-V1575)	159.22	42.38
28 46 13 31-0167	EA	Genesis Ceiling Strobe, 15-95 Multi-cd, FIRE Marking, Mounts To 4" Square x 2-1/8" Box (EST3 GCF-VM)	166.04	42.38
28 46 13 31-0168	EA	Genesis Ceiling Strobe, 15-95 Multi-cd, FIRE Marking, Mounts To 4" Square x 2-1/8" Box (EST3 GCFR-VM)	166.04	42.38
28 46 13 31-0169	EA	Genesis Ceiling Strobe, 95-177 Multi-cd, FIRE Marking, Mounts To 4" Square x 2-1/8" Box (EST GCF-VMH)	181.99	42.38
28 46 13 31-0170	EA	Genesis Ceiling Strobe, 15-95 Multi-cd, Mounts To 4" Square x 2-1/8" Box (EST3 GC-VM)	166.04	42.38
28 46 13 31-0171	EA	Genesis Ceiling Strobe, 95-177 Multi-cd, Mounts To 4" Square x 2-1/8" Box (EST3 GC-VMH)	166.04	42.38
28 46 13 31-0172	EA	Genesis Trim Plate (For Two-Gang Or 4" Square Boxes) With "FIRE" Markings, White (EST3 G1T-FIRE)	94.00	42.38
28 46 13 31-0173	EA	Genesis Trim Plate (For Two-Gang Or 4" Square Boxes) With "FIRE" Markings, Red (EST3 G1RT-FIRE)	94.00	42.38
28 46 13 31-0174		**Wall Speakers And Speaker Strobes** *(28 46 13 31-0147)*		
28 46 13 31-0175	EA	Multi-Wattage 25 VRMS Speaker (EST3 G4-S2)	129.83	42.38
28 46 13 31-0176	EA	Multi-Candela/Wattage 25 VRMS Speaker-Strobe (EST3 G4-S2VM)	206.76	42.38
28 46 13 31-0177	EA	Multi-Wattage 70 VRMS Speaker (EST3 G4-S7)	129.83	42.38
28 46 13 31-0178	EA	Multi-Candela/Wattage 70 VRMS Speaker-Strobe (EST3 G4-S7VM)	206.76	42.38
28 46 13 31-0179	EA	Surface Box, White, For Genesis Speaker (EST3 G4B)	63.95	22.60
28 46 13 31-0180	EA	Surface Box, Red, For Genesis Speaker (EST3 G4RB)	63.95	22.60

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-0181		**Ceiling Speakers And Speaker Strobes** *(28 46 13 31-0147)*		
28 46 13 31-0182	EA	Genesis Ceiling Speaker, 70 VRMS, Mounts To 4" Square x 2-1/8" Box (EST3 GC-S7)	157.73	42.38
28 46 13 31-0183	EA	Genesis Ceiling Speaker/Strobe, 70 VRMS, 15-95 Multi-cd, Mounts To 4" Square x 2-1/8" Box (EST3 GC-S7VM)	206.76	42.38
28 46 13 31-0184	EA	Genesis Ceiling Speaker/Strobe, 70 VRMS, 95-177 Multi-cd, Mounts To 4" Square x 2-1/8" Box (EST3 GC-S7VMH)	222.29	42.38
28 46 13 31-0185		**Harsh Environment Signals** *(28 46 13 31-0147)*		
28 46 13 31-0186	EA	Temporal Horn, Self-Synchronized, 24 Volt DC (EST3 757-1A-T)	138.64	42.38
28 46 13 31-0187	EA	15/75 Candela Temporal Horn/Strobe, 24 Volt DC (EST3 757-7A-T)	199.87	42.38
28 46 13 31-0188	EA	110 Candela Temporal Horn/Strobe, 24 Volt DC (EST3 757-8A-T)	199.87	42.38
28 46 13 31-0189	EA	15 Candela Synchronized, 24 Volt DC, Strobe (EST3 405-5A-T)	181.66	42.38
28 46 13 31-0190	EA	15/75 Candela Synchronized, 24 Volt DC, Strobe (EST3 405-7A-T)	169.56	42.38
28 46 13 31-0191	EA	30 Candela Synchronized, 24 Volt DC, Strobe (EST3 405-3A-T)	181.66	42.38
28 46 13 31-0192	EA	60 Candela Synchronized, 24 Volt DC, Strobe (EST3 405-6A-T)	181.66	42.38
28 46 13 31-0193	EA	110 Candela Synchronized, 24 Volt DC, Strobe (EST3 405-8A-T)	181.66	42.38
28 46 13 31-0194	EA	15/75 Candela Synchronized, 24 Volt DC, Red, Outdoor Listed, Strobe (EST3 CS405-7A-T)	200.48	48.03
28 46 13 31-0195	EA	110 Candela Synchronized, 24 Volt DC, Red, Outdoor Listed, Strobe (EST3 CS405-8A-T)	200.48	48.03
28 46 13 31-0196	EA	15 Candela Temporal Horn/Strobe, 24 Volt DC (EST3 757-5A-T)	146.02	42.38
28 46 13 31-0197	EA	30 Candela Temporal Horn/Strobe, 24 Volt DC (EST3 757-3A-T)	194.06	42.38
28 46 13 31-0198		**Fire Alarm Bells** *(28 46 13 31-0147)*		
28 46 13 31-0199	EA	10" Single Stroke Fire Alarm Bells, 24 Volt DC (EST3 323D-10AW)	216.85	42.38
28 46 13 31-0200	EA	6" Vibrating Fire Alarm Bells, 24 Volt DC (EST3 439D-6AW)	171.12	42.38
28 46 13 31-0201	EA	10" Vibrating Fire Alarm Bells, 24 Volt DC (EST3 439D-10AW)	190.64	42.38
28 46 13 31-0202		**Multiple Tone Signal** *(28 46 13 31-0147)*		
28 46 13 31-0203	EA	27 Tone Selectable Signal, 24 Volt DC (EST3 5530MD-24AW)	1,456.88	1,414.51
28 46 13 31-0204		**Multi-Purpose Loudspeaker** *(28 46 13 31-0147)*		
28 46 13 31-0205	EA	15 Watt Loudspeaker, Gray (EST3 HPSA15G2570)	289.79	42.38
28 46 13 31-0206	EA	15 Watt Loudspeaker, Red (EST3 HPSA15R2570)	289.79	42.38
28 46 13 31-0207		**Bell/Strobe Plate** *(28 46 13 31-0147)*		
28 46 13 31-0208	EA	Bell/Strobe Plate - 15cd (EST3 403-5A-R)	146.26	22.60
28 46 13 31-0209		**Mounting Accessories** *(28 46 13 31-0147)*		
28 46 13 31-0210	EA	Surface Mount Box - Indoor, Red, 1-Gang (EST3 27193-11)	65.36	22.60
28 46 13 31-0211	EA	One Gang Surface Mount Box, Red, No Bottom KO (EST3 27193-11-NY)	65.36	22.60
28 46 13 31-0212	EA	Surface Mount Box - Indoor, White, 1-Gang (EST3 27193-16)	65.36	22.60
28 46 13 31-0213	EA	Surface Mount Box - Indoor, Red, 2-Gang (EST3 27193-21)	65.36	22.60
28 46 13 31-0214	EA	Surface Mount Box - Indoor, White, 2-Gang (EST3 27193-26)	65.36	22.60
28 46 13 31-0215		**Firefighters' Telephones** *(28 46 13 31-0147)*		
28 46 13 31-0216	EA	Remote Telephone Warden Station - Flush, Red, 5' Armored Cable, Hinged Door With Magnetic Latch, 4-State (EST3 6830-NY-F4)	1,295.42	70.62
28 46 13 31-0217	EA	Four State Remote Telephone Warden Station - Surface, Armored Cord (EST3 6830-NY-S4)	718.35	70.62
28 46 13 31-0218	EA	Remote Telephone Warden Station - Flush, Armored Cord (EST3 6830-NY-F)	510.53	70.62
28 46 13 31-0219	EA	Telephone Handset Assembly - Red c/w 60" Coiled Cord (EST3 6830-1)	365.66	70.62
28 46 13 31-0220	EA	Remote Telephone Handset Station - 4-State, Red, 5' Coiled Cord (EST3 6830-4)	692.48	70.62
28 46 13 31-0221	EA	Three State Telephone Handset Assembly - Red, 60" Coiled Cord, Push To Talk Button (EST3 6830-5A)	417.36	70.62
28 46 13 31-0222	EA	Remote Telephone Handset Station - 4-State, Red, 'Push To Talk' Button, 5' Coiled Cord (EST3 6830-5A-4)	784.06	70.62
28 46 13 31-0223	EA	Three State Telephone Handset Assembly - Red, 60" Armored Cord, Push To Talk Button (EST3 6830-6A)	434.60	70.62
28 46 13 31-0224	EA	Remote Telephone Handset Station - 4-State, Red, 'Push To Talk' Button, 5' Armored Cable (EST3 6830-6A-4)	901.34	70.62
28 46 13 31-0225	EA	Portable Handset Receptacle, 1 Gang Stainless Steel Faceplate (EST3 6833-1)	93.56	22.60
28 46 13 31-0226	EA	Portable Telephone Receptacle - 1-Gang, SS, 4-State (EST3 6833-4)	108.56	22.60
28 46 13 31-0227	EA	Portable Telephone Handset - Black, Coiled Cord (EST3 6830-3)	160.54	
28 46 13 31-0228	EA	Portable Telephone Handset - Red, Coiled Cord (EST3 6700-0061)	160.54	
28 46 13 31-0229	EA	Frontplate - Flush Mount, Red Finish, Break Glass Type, With Two Keys (EST3 6831-1)	236.54	28.25
28 46 13 31-0230	EA	Frontplate - Flush Mount, Red Finish, Non-Break Glass Type With Two Keys (EST3 6831-2)	296.26	28.25
28 46 13 31-0231	EA	Frontplate - Surface Mount, Red Finish, Break Glass Type, With Two Keys (EST3 6831-3)	206.68	28.25
28 46 13 31-0232	EA	Frontplate - Surface Mount, Red Finish, Non-Break Glass Type, With Two Keys (EST3 6831-4)	197.90	28.25
28 46 13 31-0233	EA	Wallbox - Flush Or Surface Mount, Red Finish, 14" x 8-1/2" x 3-1/2" (EST3 6832-1)	139.31	42.38
28 46 13 31-0234	EA	Portable Handset Storage Cabinet, Surface Mount, With Keylock, Red Finish (EST3 TCS-6)	1,342.56	56.50
28 46 13 31-0235		**Mass Notification EC Appliances** *(28 46 13 31-0147)*		
28 46 13 31-0236	EA	G1 Wall, Strobe, White Housing, Alert Markings, Amber Lens (EST3 G1WA-VMA)	166.09	42.38
28 46 13 31-0237	EA	G1 Wall, Strobe, White Housing, Alert Markings, Clear Lens (EST3 G1WA-VMC)	159.89	42.38
28 46 13 31-0238	EA	G1 Wall, Strobe, White Housing, No Markings, Amber Lens (EST3 G1WN-VMA)	166.09	42.38
28 46 13 31-0239	EA	G1 Wall, Strobe, White Housing, No Markings, Clear Lens (EST3 G1WN-VMC)	159.89	42.38

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-0240	EA	G1 Wall, White Trim Ring, Alert Marking (EST3 G1WT-ALERT)	24.36	8.48
28 46 13 31-0241		**Hazardous Location Devices** *(28 46 13 31-0014)*		
28 46 13 31-0242		**Detectors, Rate Compensation Heat, For Explosion/Weather/Moisture Proof And Ordinary Location** *(28 46 13 31-0241)*		
28 46 13 31-0243	EA	Heat Detector, Rate Compensation, Interior Vertical Surface Mount FM And UL, 135 Degree F (EST3 302-135)	141.04	42.38
28 46 13 31-0244	EA	Heat Detector, Rate Compensation, Interior Vertical Surface Mount FM And UL, 194 Degree F (EST3 302-194)	141.04	42.38
28 46 13 31-0245	EA	Heat Detector - Rate Compensation, All-Weather Vertical Mounting, FM And UL, 135 Degree F (EST3 302-AW-135)	147.11	42.38
28 46 13 31-0246	EA	Heat Detector - Rate Compensation, All-Weather Vertical Mounting, FM And UL, 194 Degree F (EST3 302-AW-194)	147.11	42.38
28 46 13 31-0247	EA	Heat Detector, Rate Compensation, Explosion Proof Mounting, Interior Vertical Surface Mount FM And UL, 135 Degree F, Requires JALX-11 Or Equal (EST3 302-EPM-135)	203.17	42.38
28 46 13 31-0248	EA	Heat Detector, Rate Compensation, Explosion Proof Mounting, Interior Vertical Surface Mount FM And UL, 194 Degree F, Requires JALX-11 Or Equal (EST3 302-EPM-194)	203.17	42.38
28 46 13 31-0249	EA	Heat Detector, Rate Compensation, All-Weather Vertical, Box Mount (1/2" NPT), FM And UL, 135 Degree F, Requires STONCO27 Or Equal (EST3 302-ET-135)	147.11	42.38
28 46 13 31-0250	EA	Heat Detector, Rate Compensation, All-Weather Vertical, Box Mount (1/2" NPT), FM And UL, 194 Degree F, Requires STONCO27 Or Equal (EST3 302-ET-194)	147.11	42.38
28 46 13 31-0251		**Hazardous Locations Fire Alarm Station** *(28 46 13 31-0241)*		
28 46 13 31-0252	EA	Hazardous Location Fire Alarm Station (EST3 XAL53)	1,373.66	70.62
28 46 13 31-0253	EA	Explosion Proof, Weatherproof, Fire Alarm Station, Single Action, Cat 45 Key Reset, Terminal Connections, DPDT (EST3 MPSR1-D45WX-GE)	1,306.70	70.62
28 46 13 31-0254		**Hazardous Location Strobes** *(28 46 13 31-0241)*		
28 46 13 31-0255	EA	Explosion Proof Strobe (EST3 116DEXSTC-FJ)	2,060.61	42.38
28 46 13 31-0256	EA	Wall Bracket Mounting Elbow (EST3 116EX-B)	382.70	14.13
28 46 13 31-0257	EA	Ceiling / Wall Mounting Module (EST3 116EX-C)	501.14	16.95
28 46 13 31-0258	EA	Pendant Mounting Module (EST3 116EX-P)	366.38	16.95
28 46 13 31-0259		**Hazardous Location Bells** *(28 46 13 31-0241)*		
28 46 13 31-0260	EA	6" Hazardous Location Bells, 24 Volt DC (EST3 439DEX-6AW)	1,483.41	42.38
28 46 13 31-0261	EA	8" Hazardous Location Bells, 24 Volt DC (EST3 439DEX-8AW)	1,522.17	42.38
28 46 13 31-0262	EA	10" Hazardous Location Bells, 24 Volt DC (EST3 439DEX-10AW)	1,536.14	42.38
28 46 13 31-0263		**Hazardous Location Horns** *(28 46 13 31-0241)*		
28 46 13 31-0264	EA	Hazardous Location Horns (EST3 888D-N5)	1,450.01	42.38
28 46 13 31-0265	EA	Explosion Proof Horn, Diode Polarized, 24 Volt DC (EST3 889D-AW)	1,181.78	42.38
28 46 13 31-0266		**Door Holders And Relays** *(28 46 13 31-0014)*		
28 46 13 31-0267		**Electromagnetic Door Holders** *(28 46 13 31-0266)*		
28 46 13 31-0268	EA	24 Volt AC / 24 Volt DC / 120 Volt AC, Door Holder, Single, Floor Mount (EST3 1501-AQN5)	248.80	42.38
28 46 13 31-0269	EA	24 Volt AC / 24 Volt DC / 120 Volt AC, Door Holder, Double, Floor Mount (EST3 1502-AQN5)	326.59	42.38
28 46 13 31-0270	EA	24 Volt AC / 24 Volt DC / 120 Volt AC, Door Holder, Flush, Wall Mount (EST3 1504-AQN5)	209.07	42.38
28 46 13 31-0271	EA	24 Volt AC / 24 Volt DC / 120 Volt AC, Door Holder, Flush, Wall Mount, Short Catch Plate (EST3 1505-AQN5)	209.07	42.38
28 46 13 31-0272	EA	24 Volt AC / 24 Volt DC / 120 Volt AC, Door Holder, Surface, Wall Mount (EST3 1508-AQN5)	212.66	42.38
28 46 13 31-0273	EA	24 Volt AC / 24 Volt DC / 120 Volt AC, Door Holder, Completely Flush, Wall Mount (EST3 1509-AQN5)	216.09	42.38
28 46 13 31-0274		**Control Relays, Multi-Voltage** *(28 46 13 31-0266)*		
28 46 13 31-0275	EA	Single SPDT With LED, Adhesive Tape Mounting (EST3 PAM1)	50.33	8.48
28 46 13 31-0276		**FireShield Plus** *(28 46 13 31-0014)*		
28 46 13 31-0277		**3 Zone System** *(28 46 13 31-0276)*		
28 46 13 31-0278	EA	Conventional Fire Alarm Control Panel, 3 Class B IDC Zones, 2 Class B NAC's, 3.5 Amperes NAC Power, Red Enclosure, 120 Volt AC, Capacity For (2) 10 Amp Hours Batteries (EST3 FSP302R)	1,313.46	339.00
28 46 13 31-0279	EA	Conventional Fire Alarm Control Panel, 3 Class B IDC Zones, 2 Class B NAC's, 3.5 Amperes NAC Power, Red Enclosure, 120 Volt AC, Capacity For (2) 10 Amp Hours Batteries, With Upload/Download DACT (EST3 FSP302RD)	1,926.95	452.00
28 46 13 31-0280	EA	Conventional Fire Alarm Control Panel, 3 Class B IDC Zones, 2 Class B NAC's, 3.5 Amperes NAC Power, Gray Enclosure, 120 Volt AC, Capacity For (2) 10 Amp Hours Batteries (EST3 FSP302G)	1,313.46	339.00
28 46 13 31-0281	EA	Conventional Fire Alarm Control Panel, 3 Class B IDC Zones, 2 Class B NAC's, 3.5 Amperes NAC Power, Gray Enclosure, 120 Volt AC, Capacity For (2) 10 Amp Hours Batteries, With Upload/Download DACT (EST3 FSP302GD)	1,926.95	452.00
28 46 13 31-0282	EA	Semi-Flush Trim Kit For 3 Or 5 Zone Enclosures, Gray (EST3 F-TRIM35G)	95.28	14.13
28 46 13 31-0283	EA	Semi-Flush Trim Kit For 3 Or 5 Zone Enclosures, Red (EST3 F-TRIM35R)	95.28	14.13
28 46 13 31-0284		**5 Zone System** *(28 46 13 31-0276)*		

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-0285	EA	Conventional Fire Alarm Control Panel, 5 Class B IDC Zones, 2 Class B NAC's, 3.5 Amperes NAC Power, Red Enclosure, 120 Volt AC, Capacity For (2) 10 Amp Hours Batteries (EST3 FSP502R)	1,421.96	339.00
28 46 13 31-0286	EA	Conventional Fire Alarm Control Panel, 5 Class B IDC Zones, 2 Class B NAC's, 3.5 Amperes NAC Power, Red Enclosure, 120 Volt AC, Capacity For (2) 10 Amp Hours Batteries, With Upload/Download DACT (EST3 FSP502RD)	2,029.24	452.00
28 46 13 31-0287	EA	Conventional Fire Alarm Control Panel, 5 Class B IDC Zones, 2 Class B NAC's, 3.5 Amperes NAC Power, Gray Enclosure, 120 Volt AC, Capacity For (2) 10 Amp Hours Batteries (EST3 FSP502G)	1,421.96	339.00
28 46 13 31-0288	EA	Conventional Fire Alarm Control Panel, 5 Class B IDC Zones, 2 Class B NAC's, 3.5 Amperes NAC Power, Gray Enclosure, 120 Volt AC, Capacity For (2) 10 Amp Hours Batteries, With Upload/Download DACT (EST3 FSP502GD)	2,029.24	452.00
28 46 13 31-0289	EA	Semi-Flush Trim Kit For 3 Or 5 Zone Enclosures, Gray (EST3 F-TRIM35G)	95.28	14.13
28 46 13 31-0290	EA	Semi-Flush Trim Kit For 3 Or 5 Zone Enclosures, Red (EST3 F-TRIM35R)	95.28	14.13
28 46 13 31-0291		10 Zone System *(28 46 13 31-0276)*		
28 46 13 31-0292	EA	Conventional Fire Alarm Control Panel, 10 Class B IDC Zones, 4 Class B NAC's, 3.5 Amperes NAC Power, Red Enclosure, 120 Volt AC, Capacity For (2) 17 Amp Hours Batteries (EST3 FSP1004R)	2,066.44	452.00
28 46 13 31-0293	EA	Conventional Fire Alarm Control Panel, 10 Class B IDC Zones, 4 Class B NAC's, 3.5 Amperes NAC Power, Red Enclosure, 120 Volt AC, Capacity For (2) 17 Amp Hours Batteries, With Upload/Download DACT (EST3 FSP1004RD)	2,679.93	564.99
28 46 13 31-0294	EA	Conventional Fire Alarm Control Panel, 10 Class B IDC Zones, 4 Class B NAC's, 3.5 Amperes NAC Power, Gray Enclosure, 120 Volt AC, Capacity For (2) 17 Amp Hours Batteries (EST3 FSP1004G)	2,019.95	452.00
28 46 13 31-0295	EA	Conventional Fire Alarm Control Panel, 10 Class B IDC Zones, 4 Class B NAC's, 3.5 Amperes NAC Power, Gray Enclosure, 120 Volt AC, Capacity For (2) 17 Amp Hours Batteries, With Upload/Download DACT (EST3 FSP1004GD)	2,679.93	564.99
28 46 13 31-0296	EA	Semi-Flush Trim Kit For 10 Zone Enclosures, Gray (EST3 F-TRIM10G)	112.07	14.13
28 46 13 31-0297	EA	NAC Power Expansion Transformer, 120 Volt AC, Increases 10 Zone FACP NAC (EST3 F-XTR120)	204.10	28.25
28 46 13 31-0298		FireShield Plus Off Premise Communication Options *(28 46 13 31-0276)*		
28 46 13 31-0299	EA	F-Series Upload/Download DACT And Modem, Dual Line, With 2x16 LCD (EST3 F-DACT)	459.48	28.25
28 46 13 31-0300		FireShield Plus Remote LED Annunciators *(28 46 13 31-0276)*		
28 46 13 31-0301	EA	Remote System Indicator, Power, Alarm, Supervisory, Trouble And Ground Fault LED's With Local Buzzer, Single Gang, And White Trim Plate (EST3 FSRSI)	185.33	42.38
28 46 13 31-0302	EA	Remote Zone Indicator, Contains 5 Red LED's For Alarm Zone Indication, With Jumper Selectable Zone Settings, Single Gang, And White Trim Plate (EST3 FSRZI-A)	185.33	42.38
28 46 13 31-0303	EA	Remote Zone Indicator, Contains 5 Bi-Color LED's (Red/Yellow) For Alarm Or Supervisory Zone Indication, With Jumper Selectable Zone Settings, Single Gang, And White Trim Plate (EST3 FSRZI-SA)	193.25	42.38
28 46 13 31-0304	EA	Remote Annunciator Trim Plate - 2 Gang - White (EST3 FSAT2)	37.11	8.48
28 46 13 31-0305	EA	Remote Annunciator Trim Plate - 3 Gang - White (EST3 FSAT3)	47.23	8.48
28 46 13 31-0306	EA	Remote Annunciator Trim Plate - 4 Gang - White (EST3 FSAT4)	71.53	8.48
28 46 13 31-0307		FireShield Plus Remote 10 Zone LED Annunciators *(28 46 13 31-0276)*		
28 46 13 31-0308	EA	Remote LED Annunciator, With Common System Indicators, 10 Zone Indicators, White Housing, Mounts To 4" Electrical Box, For Use With 10 Zone Panels Only (EST3 FSRA10)	611.73	42.38
28 46 13 31-0309	EA	Remote LED Annunciator, With Common System Indicators, 10 Zone Indicators And Common Control Switches, White Housing, Mounts To 4" Electrical Box, For Use With 10 Zone Panels Only (EST3 FSRA10C)	673.73	42.38
28 46 13 31-0310	EA	Single Unit Remote Annunciator Enclosure, 4" Box Mount, Key Locked Door, Plexiglas Window, Gray (EST3 RA-ENC1)	211.49	28.25
28 46 13 31-0311		FireShield Plus Remote Relays And Interfaces *(28 46 13 31-0276)*		
28 46 13 31-0312	EA	Remote Relay Module, 5 Form C Contacts, Jumper Selectable Operation, With Mounting Track (EST3 FSRRM24)	224.14	28.25
28 46 13 31-0313	EA	11" Snap Track Holds 2-4 RRMs, Used To Mount FSRRMs In MFC-A Or Other Listed Enclosure, MFC-A Will Hold Two FSRRM-11S (EST3 FSRRM-S11)	91.01	16.95
28 46 13 31-0314	EA	Common Function Graphic Driver/Interface - 9 Relays And 5 Switch Inputs For Common System Indicators And Controls (EST3 FSUIM)	363.39	28.25
28 46 13 31-0315		FireShield Plus Accessories *(28 46 13 31-0276)*		
28 46 13 31-0316	EA	Resistor Kit With 1-3.6K And 1-1.1K (46071-0409) (EST3 EOL3.6-1.1)	20.33	
28 46 13 31-0317	EA	4.7k UL End Of Line Resistor With Fireshield Panels (EST3 EOL47PK7)	11.85	
28 46 13 31-0318		iO Series Fire Control Panels *(28 46 13 31-0014)*		
28 46 13 31-0319		Intelligent Analog Control Panels *(28 46 13 31-0318)*		
28 46 13 31-0320	EA	FACP, 1 Intelligent Loop Supporting 125 Detectors/125 Modules, 2nd Loop Optional, 4 Class B NAC's, 6.5 Amperes Power Supply, Gray Door, 115 Volt AC, Capacity For Up (2) 18a/h Batteries, English (EST3 iO500G)	3,896.70	564.99
28 46 13 31-0321	EA	FACP, 1 Intelligent Loop Supporting 125 Detectors/125 Modules, 2nd Loop Optional, 4 Class B NAC's, 6.5 Amperes Power Supply, Gray Door, 115 Volt AC, Capacity For Up (2) 18 Amp/hour Batteries, With Dual Line Dialer/Modem, English (EST3 iO500GD)	4,197.39	564.99
28 46 13 31-0322	EA	FACP, 1 Loop, 64 Intelligent Devices Max, 2 Class B NAC's, 4.25 Amperes Power Supply, Gray Door, 115 Volt AC, Capacity For Up (2) 10 Amp/hour Batteries, English (EST3 iO64G)	3,109.94	452.00
28 46 13 31-0323	EA	FACP, 1 Loop, 64 Intelligent Devices Max, 2 Class B NAC's, 4.25 Amperes Power Supply, Gray Door, 115 Volt AC, Capacity For Up (2) 10 Amp/hour Batteries, With Dual Line Dialer/Modem, English (EST3 iO64GD)	3,249.43	452.00

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-0324		**Option Modules And Accessories For iO Series** *(28 46 13 31-0318)*		
28 46 13 31-0325	EA	16 Zone LED Annunciator, 2 LED's Per Zone, Customizable Insert Labels, Left Side Mounting, Zones 1-16 (EST3 D16L-iO-1)	394.74	42.38
28 46 13 31-0326	EA	16 Zone LED Annunciator, 2 LED's Per Zone, Customizable Insert Labels, Right Side Mounting, Zones 17-32, Requires D16L-iO-1 (EST3 D16L-iO-2)	239.74	42.38
28 46 13 31-0327	EA	Serial Interface, RS232, 4 Terminal Connections For Supervised/Unsupervised Printers And Connection To PC's (EST3 SA-232)	239.74	42.38
28 46 13 31-0328	EA	Class A NAC Module, For 64 Point Systems Only, Mounts To Main Board (EST3 SA-CLA)	211.49	28.25
28 46 13 31-0329	EA	Dialer/Modem, Two Telephone Line Connections, RJ31, Mounts To Base Plate (EST3 SA-DACT)	448.18	22.60
28 46 13 31-0330	EA	Ethernet Port Interface, RJ45, Mounts To Base Plate (EST3 SA-ETH)	820.17	22.60
28 46 13 31-0331	EA	Trim Kit For Semi-Flush Mounting 64 Point Systems (EST3 SA-TRIM1)	93.35	14.13
28 46 13 31-0332	EA	Trim Kit For Semi-Flush Mounting 500 Point Systems (EST3 SA-TRIM2)	108.85	14.13
28 46 13 31-0333	EA	Expansion Loop For iO500 Systems, 125 Detectors/125 Modules, Mounts On Main Board (EST3 XAL250)	1,507.94	56.50
28 46 13 31-0334		**Remote Annunciators For iO Series** *(28 46 13 31-0318)*		
28 46 13 31-0335	EA	Remote Annunciator, 80 Character LCD, Common System Indicators, Beige Housing, Mounts To 4" Box With Supplied Ring (EST3 RLCD)	820.96	42.38
28 46 13 31-0336	EA	Remote Annunciator, 80 Character LCD, Common System Indicators And Controls, Beige Housing, Mounts To 4" Box With Supplied Ring (EST3 RLCD-C)	859.72	42.38
28 46 13 31-0337		**Remote Annunciator Accessories** *(28 46 13 31-0318)*		
28 46 13 31-0338	EA	24 Expander Cable Assembly, With Cable And Hardware (EST3 730073)	90.25	14.13
28 46 13 31-0339	EA	12 Expander Cable (Cable Only) (EST3 7120313-01)	59.25	14.13
28 46 13 31-0340	EA	24 Expander Cable (Cable Only) (EST3 7120313-02)	82.49	14.13
28 46 13 31-0341	EA	Single Unit Remote Annunciator Enclosure, 4" Box Mount, Key Locked Door, Plexiglas Window, Beige (EST3 RA-ENC1)	239.74	42.38
28 46 13 31-0342	EA	Dual Unit Remote Annunciator Enclosure, 4" Box Mount, Key Locked Door, Plexiglas Window, Beige (EST3 RA-ENC2)	278.48	42.38
28 46 13 31-0343	EA	Three Unit Remote Annunciator Enclosure, 4" Box Mount, Key Locked Door, Plexiglas Window, Beige (EST3 RA-ENC3)	317.24	42.38
28 46 13 31-0344	EA	Blank Zone Card Insert For RLEDx Controllers (EST3 RA-LED16ZC)	59.25	14.13
28 46 13 31-0345	EA	Blank Zone Card Insert For RLED24x Controllers (EST3 RA-LED24ZC)	59.25	14.13
28 46 13 31-0346	EA	Remote Key Switch, Single Gang Mount, Provides Keyed Control To Enable/Disable Common Control Switches On Remote Annunciators (EST3 RKEY)	126.97	14.13
28 46 13 31-0347		**System Accessories** *(28 46 13 31-0318)*		
28 46 13 31-0348	EA	Battery Cabinet, 14" x 18.25" x 7.25" Free Standing Cabinet With Key Lock, Supports Up To 40 Amp Hours Batteries, Will Hold Up To Two 12 Volt DC, 24 Ampere Batteries (EST3 BC-1)	448.08	56.50
28 46 13 31-0349	EA	Isolator Module - RS232, For Use With Short Haul Modems, VDU-3, CCA Series, CGP Series And FCOM-232, Requires 1/2 Size Cabinet Footprint (EST3 IOP3A)	1,961.67	452.00
28 46 13 31-0350		**Conventional Initiating Devices** *(28 46 13 31-0014)*		
28 46 13 31-0351		**Detectors, Heat, Double Pole** *(28 46 13 31-0350)*		
		Note: WARNING, Heat detectors are not Life Safety Devices, use for property protection only.		
28 46 13 31-0352	EA	Heat Detector, 135 Degree F Fixed Temperature (CF135-2)	168.27	42.38
28 46 13 31-0353	EA	Heat Detector, 200 Degree F Fixed Temperature (CF200-2)	168.27	42.38
28 46 13 31-0354	EA	Heat Detector, 135 Degree F ROR/Fixed Temperature (CR135-2)	168.27	42.38
28 46 13 31-0355	EA	Heat Detector, 200 Degree F ROR/Fixed Temperature (CR200-2)	168.27	42.38
28 46 13 31-0356		**Detectors, Rate Compensation Heat, Accessories** *(28 46 13 31-0350)*		
28 46 13 31-0357	EA	Heat Detector, Rate Compensation, Adapter Plate For Mounting 302 And 302-AW To Any 3 Outlet Box Or 4" Octagon Outlet Box (GE AP-P)	97.28	42.38
28 46 13 31-0358	EA	Explosion Proof Outlet Body With Cover, 1/2" Threaded Hubs On Back, Four Sides And Cover (GE JALX11)	298.57	22.60
28 46 13 31-0359	EA	4" Weatherproof, Octagon Back Box And Cover, 1/2" Threaded Hubs On Back, Four Sides And Cover (GE STONCO27)	86.71	28.25
28 46 13 31-0360		**Detectors, Heat, Fire-Lite** *(28 46 13 31-0350)*		
		Note: WARNING, Heat detectors are not Life Safety Devices, use for property protection only.		
28 46 13 31-0361	EA	Explosion Heat Detector, 135 Degree F Fixed Temperature, Rate-Anticipation Heat Detector, All-Weather Vertical Mounting (302-EPM-135)	156.35	42.38
28 46 13 31-0362	EA	Explosion Heat Detector, 194 Degree F Fixed Temperature, Rate-Anticipation Heat Detector, All-Weather Vertical Mounting (302-EPM-194)	156.35	42.38
28 46 13 31-0363		**Audio Notification Systems (Standalone Voice Evacuation)** *(28 46 13 31-0014)*		
28 46 13 31-0364		**Audio Notification Panels** *(28 46 13 31-0363)*		
28 46 13 31-0365	EA	Audio Notification Panel, 100 Watt Amplifier, DMR, Temporal Pattern, Power Supply And Battery Charger, Standard Message, Microphone, And 14.5" x 18" x 4" Gray Cabinet (GE ANS100MDG)	5,733.30	564.99
28 46 13 31-0366	EA	Audio Notification Panel, 100 Watt Amplifier, DMR, Temporal Pattern, Power Supply And Battery Charger, Standard Message, Microphone, And 14.5" x 18" x 4" Red Cabinet (GE ANS100MDR)	5,733.30	564.99
28 46 13 31-0367	EA	Audio Notification Panel, 25 Watt Amplifier, DMR, Temporal Pattern, Power Supply And Battery Charger, Standard Message, Microphone, And 14.5" x 18" x 4" Gray Cabinet (GE ANS25MDG)	4,229.87	564.99

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-0368	EA	Audio Notification Panel, 25 Watt Amplifier, DMR, Temporal Pattern, Power Supply And Battery Charger, Standard Message, Microphone, And 14.5" x 18" x 4" Red Cabinet (GE ANS25MDR)	4,229.87	564.99
28 46 13 31-0369	EA	Audio Notification Panel, 50 Watt Amplifier, DMR, Temporal Pattern, Power Supply And Battery Charger, Standard Message, Microphone, And 14.5" x 18" x 4" Gray Cabinet (GE ANS50MDG)	4,973.83	564.99
28 46 13 31-0370	EA	Audio Notification Panel, 50 Watt Amplifier, DMR, Temporal Pattern, Power Supply And Battery Charger, Standard Message, Microphone, And 14.5" x 18" x 4" Red Cabinet (GE ANS50MDR)	4,973.83	564.99
28 46 13 31-0371		**Audio Notification Expander Panels** *(28 46 13 31-0363)*		
28 46 13 31-0372	EA	Audio Expander Panel, 100W With Out DMR Or Microphone, Power Supply And Battery Charger, 14.5" x 18" x 4" Gray Cabinet (GE ANS100XG)	4,353.86	564.99
28 46 13 31-0373	EA	Audio Expander Panel, 100W With Out DMR Or Microphone, Power Supply And Battery Charger, 14.5" x 18" x 4" Red Cabinet (GE ANS100XR)	4,353.86	564.99
28 46 13 31-0374	EA	Audio Expander Panel, 25 Watt Without DMR Or Microphone, Power Supply And Battery Charger, 14.5" x 18" x 4" Gray Cabinet (GE ANS25XG)	2,896.92	564.99
28 46 13 31-0375	EA	Audio Expander Panel, 25 Watt Without DMR Or Microphone, Power Supply And Battery Charger, 14.5" x 18" x 4" Red Cabinet (GE ANS25XR)	2,896.92	564.99
28 46 13 31-0376	EA	Audio Expander Panel, 50W With Out DMR Or Microphone, Power Supply And Battery Charger, 14.5" x 18" x 4" Gray Cabinet (GE ANS50XG)	3,749.38	564.99
28 46 13 31-0377	EA	Audio Expander Panel, 50W With Out DMR Or Microphone, Power Supply And Battery Charger, 14.5" x 18" x 4" Red Cabinet (GE ANS50XR)	3,749.38	564.99
28 46 13 31-0378		**Audio Notification Output Accessories** *(28 46 13 31-0363)*		
28 46 13 31-0379	EA	Zone Adapter, 1 Circuit To 2 Circuit's (GE ANSZC2B)	167.74	14.13
28 46 13 31-0380	EA	Zone Splitter, 2 Class A Circuits With Zone Selection Switches And All-Call Switch (GE ANSZS2A)	753.97	28.25
28 46 13 31-0381	EA	Zone Splitter, 4 Class B Circuits With Zone Selection Switches And All-Call Switch (GE ANSZS4B)	753.97	28.25
28 46 13 31-0382	EA	Class A Converter (GE ANSZSC4A)	536.98	28.25
28 46 13 31-0383		**Audio Notification Remote Microphone** *(28 46 13 31-0363)*		
28 46 13 31-0384	EA	Microphone (GE ANSMIKE)	195.99	28.25
28 46 13 31-0385	EA	Remote Microphone, Supervised In Surface/Semi-Flush Gray Cabinet, Requires EVX-SC Card In Evacuation Panel (GE ANSREMG)	831.47	28.25
28 46 13 31-0386	EA	Remote Microphone, Supervised In Surface/Semi-Flush Red Cabinet, Requires EVX-SC Card In Evacuation Panel (GE ANSREMR)	831.47	28.25
28 46 13 31-0387	EA	Remote Microphone Supervisory Card, One Per System, Supervises Up To 5 Remote Microphones (GE ANSREMSUP)	183.24	14.13
28 46 13 31-0388	EA	Relay Card For Supervision/Zone Splitter To Remote Microphone (GE ANSZSR)	97.98	14.13
28 46 13 31-0389		**Audio Notification Accessories** *(28 46 13 31-0363)*		
28 46 13 31-0390	EA	Audio Matching - Line Input/Output Card (GE ANSAUX)	335.49	28.25
28 46 13 31-0391	EA	Class B Backup Amplifier Switching Module (GE ANSBKUP)	335.49	28.25
28 46 13 31-0392	EA	Class A Backup Amplifier Switching Module (GE ANSBKUPA)	335.49	28.25
28 46 13 31-0393	EA	Eight Input Remote Serial Interface Module, Accepts Dry Contact Interface To Control Up To 8 Messages, Message Recording Included With Module, For Industrial Signaling Only, Not UL Listed For Fire Alarm / Life Safety Applications (GE ANSRSI8)	753.97	28.25
28 46 13 31-0394		**Audio Notification Modules, Without Cabinet And Transformer** *(28 46 13 31-0363)*		
28 46 13 31-0395	EA	100W Expander Module (No Microphone OR DMR), Requires Transformer Ordered Separately (GE ANS100A) Note: Excludes cabinet.	2,763.39	56.50
28 46 13 31-0396	EA	100W Expander Module With Microphone (No DMR), Requires Transformer Ordered Separately (GE ANS100AM) Note: Excludes cabinet.	2,902.89	56.50
28 46 13 31-0397	EA	100W Audio Notification Module With DMR And Microphone, Requires Transformer Ordered Separately (GE ANS100AMD) Note: Excludes cabinet.	4,018.84	56.50
28 46 13 31-0398	EA	25 Watt Expander Module (No Microphone Or DMR), Requires Transformer Ordered Separately (GE ANS25A) Note: Excludes cabinet.	1,507.94	56.50
28 46 13 31-0399	EA	25 Watt Expander Module With Microphone (No DMR), Requires Transformer (GE ANS25AM) Note: Excludes cabinet.	1,507.94	56.50
28 46 13 31-0400	EA	25 Watt Audio Notification Module With DMR And Microphone, Requires Transformer Ordered Separately (GE ANS25AMD)	2,763.39	56.50
28 46 13 31-0401	EA	50W Expander Module (No Microphone Or DMR) (GE ANS50A) Note: Excludes cabinet.	2,205.42	56.50
28 46 13 31-0402	EA	50W Expander Module With Microphone (No DMR) (GE ANS50AM) Note: Excludes cabinet.	2,344.91	56.50
28 46 13 31-0403	EA	50W Audio Notification Module With DMR And Microphone (GE ANS50AMD) Note: Excludes cabinet.	3,460.86	56.50
28 46 13 31-0404	EA	Power Transformer, Open Frame, 28 Volt AC At 180 VA (EVAX 50/100) (GE ANST28180)	167.74	14.13
28 46 13 31-0405	EA	Power Transformer, Open Frame, 28 Volt AC At 100 VA (EVAX 25) (GE ANST2885)	122.86	14.13
28 46 13 31-0406		**EST4 Life Safety And Security Control** *(28 46 13 31-0013)*		
28 46 13 31-0407		**Audio Units And Interfaces** *(28 46 13 31-0406)*		
28 46 13 31-0408	EA	Annunciator, Audio And Telephone Interface Module (EST4 4-ANNAUDTEL)	322.83	84.75
28 46 13 31-0409	EA	Audio And Telephone Interface/Riser Module (EST4 4-AUDTELS)	669.84	28.25
28 46 13 31-0410	EA	Firefighter Master Handset (EST4 4-FT)	647.25	70.62
28 46 13 31-0411	EA	Display, LCD Module For Audio/Telephone Control (EST4 4-LCDAUDTEL)	591.20	84.75

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-0412	EA	Display, LCD Module With Cable For Audio/Telephone Control For Annunciators (EST4 4-LCDAUDTELANN)	662.59	84.75
28 46 13 31-0413	EA	Display, LCD Module With Cable For Audio/Telephone Control With Bracket For CAB 14 And CAB 21 (EST4 4-LCDAUDTELCAB-CB)	717.84	84.75
28 46 13 31-0414	EA	Display, LCD Module With Cable For Audio/ Telephone Control With Mounting Plate (EST4 4-LCDAUDTELCAB-MPLT) Note: For CAB7, CAB14, CAB21, 4-16ANNMT and 4-24ANNMT applications	846.32	84.75
28 46 13 31-0415	EA	Paging Microphone (EST4 4-MIC)	696.99	28.25

28 46 13 31-0416 Cabinets And Chassis *(28 46 13 31-0406)*

28 46 13 31-0417	EA	Battery Shelf For RCCxx Series Cabinets (EST4 3-BATS) Note: Takes one chassis space in a RCC cabinet. Provides space for up to one 65AH battery.	61.87	10.70
28 46 13 31-0418	EA	Battery Distribution Module (EST4 3-BTSEN)	456.75	113.00
28 46 13 31-0419	EA	Wallbox With 2 Chassis Spaces (EST4 3-CAB14B)	621.16	42.38
28 46 13 31-0420	EA	Wallbox With 3 Chassis Spaces (EST4 3-CAB21B)	762.84	42.38
28 46 13 31-0421	EA	Backbox, Black (EST4 3-CAB5B) Note: Supports five Local Rail Modules.	291.75	42.38
28 46 13 31-0422	EA	Wallbox With 1 Chassis Space (EST4 3-CAB7B)	418.78	42.38
28 46 13 31-0423	EA	3-CAB - Seismic Battery Hold Down For 3-CAB 7, 14 Or 21 (EST4 3-CABEQ) Note: Supports two 12V batteries from 10 Amp hrs up to 18 Ahrs. Comes with EST3 Chassis hardening hardware and instructions	322.43	11.30
28 46 13 31-0424	EA	Chassis Assembly (EST4 3-CHAS7) Note: Fits in any Lobby or Remote Closet Cabinet except CAB5 Series. Provides space for up to seven LRMs. Rear space for up to two power supplies.	469.34	42.38
28 46 13 31-0425	EA	Remote Closet Enclosure, Red (EST4 3-RCC14R)	1,121.62	113.00
28 46 13 31-0426	EA	Remote Closet Enclosure, Red (EST4 3-RCC21R)	1,551.69	113.00
28 46 13 31-0427	EA	Remote Closet Enclosure, Red (EST4 3-RCC7R)	914.21	113.00
28 46 13 31-0428	EA	3-RCC Series Cabinet, Seismic Battery Hold Down For 3-RCC1XXR Series (EST4 3-RCCEQ50) Note: Supports one set of 50 Amp hr (two batteries). Order 3-RCC14R or 3-RCC21R separately.	427.89	141.25
28 46 13 31-0429	EA	3-RCC Series Cabinet, Seismic Battery Hold Down (EST4 3-RCCEQ65) Note: Supports one set of 65 Ahr (two batteries) batteries (one battery in bottom of cabinet, one battery mounted on 3-BATS. Order 3-RCCxxR cabinet and 3-BATS separately.	882.10	141.25
28 46 13 31-0430	EA	Tamper Switch For CAB5 Series Cabinets (EST4 3-TAMP5)	117.29	28.25
28 46 13 31-0431	EA	Tamper Switch For 3-RCC Cabinets (EST4 3-TAMPRCC)	117.29	28.25
28 46 13 31-0432	EA	Mounting Bracket (EST4 4-BRKT-CB) Note: Provides space for mounting any one of 4-ANNCPU, 4-FWAL-1, 4-FWAL-2, 4-FWAL-3, 4-FWAL-4, or a 4-NET-AD module. Mounts on the back plane of a 3-CHAS7 or on the back plane of a 3-ASU chassis in retrofit applications.	85.21	14.13
28 46 13 31-0433	EA	Mounting Bracket (EST4 4-BRKT-CS) Note: Provides space for mounting any one of 4-FWAL-1, 4-FWAL-2, 4-FWAL-3, 4-FWAL-4, or a 4-NET-AD module. The bracket mounts to the side of a 3-CHAS7.	85.21	14.13
28 46 13 31-0434	EA	Door Assembly, Bronze (EST4 4-CAB16D) Note: Includes 16 User Interface spaces, mounts to 3-CAB7B wallbox.	594.44	8.48
28 46 13 31-0435	EA	Door Assembly, Red (EST4 4-CAB16DR) Note: Includes 16 User Interface spaces, mounts to 3-CAB7B wallbox.	594.44	8.48
28 46 13 31-0436	EA	Door Assembly, Bronze (EST4 4-CAB24D) Note: Outer door and black inner door with 24 user interface spaces, mounts to 3-CAB14B wallbox.	735.04	8.48
28 46 13 31-0437	EA	Door Assembly, Bronze (EST4 4-CAB24DL) Note: Outer door and black inner door with 24 user interface spaces, mounts to 3-CAB21B wallbox.	840.52	8.48
28 46 13 31-0438	EA	Door Assembly, Red (EST4 4-CAB24DR) Note: Outer door and black inner door with 24 user interface spaces, mounts to 3-CAB14B wallbox.	735.93	8.48
28 46 13 31-0439	EA	Door Assembly, Red (EST4 4-CAB24DRL) Note: Outer door and black inner door with 24 user interface spaces, mounts to 3-CAB21B wallbox.	840.52	8.48
28 46 13 31-0440	EA	Door Assembly, Bronze (EST4 4-CAB8D) Note: Outer door and black inner door with 8 user interface spaces, mounts to 3-CAB5B wallbox.	417.30	8.48
28 46 13 31-0441	EA	Door Assembly, Red (EST4 4-CAB8DR) Note: Outer door and black inner door with 8 user interface spaces, mounts to 3-CAB5B wallbox.	417.30	8.48
28 46 13 31-0442	EA	Replacement Hinge Assembly For CAB21 (EST4 4-HNG21)	82.23	
28 46 13 31-0443	EA	Replacement Hinge Assembly For CAB7 Or 14 (EST4 4-HNG714)	82.23	
28 46 13 31-0444	EA	Replacement Door Lock And Two Keys (EST4 4-LOCK2KEY)	169.98	
28 46 13 31-0445	EA	Mounting Plate (EST4 4-MPLT) Note: Mounts in chassis or battery space	219.73	14.13
28 46 13 31-0446	EA	Tamper Switch For 3-CAB7B, 3-CAB14B And 3-CAB21B Cabinets With 4-CABXXD Series Doors (EST4 4-TAMP) Note: Mounts to side of cabinet.	108.99	28.25
28 46 13 31-0447	EA	Battery Cabinet, Black Backbox, Bronze Door (EST4 BC-1) Note: Supports up to 40AH batteries	308.17	56.50
28 46 13 31-0448	EA	Seismic Battery Hold Down For BC-1 (EST4 BC-1EQ) Note: Supports up to two 40 Ahr batteries. Order BC-1 or BC-1R Separately.	161.41	11.30
28 46 13 31-0449	EA	Battery Cabinet, Black Backbox, Red Door (EST4 BC-1R) Note: Supports up to 40AH batteries.	308.17	56.50
28 46 13 31-0450	EA	8" x 14 x 3-1/2" Multi-Function Enclosure, Red (EST4 MFC-A)	204.36	56.50

28 46 13 31-0451 Central Processing Unit *(28 46 13 31-0406)*

28 46 13 31-0452	EA	Annunciator Central Processor Unit (CPU) (EST4 4-ANNCPU) Note: Provides mounting for up to two network controllers, one USB device port, one USB host port and one 4-ANNAUDTEL module.	693.68	84.75
28 46 13 31-0453	EA	Cable (EST4 4-CABL0542) Note: Interconnects the 4-CPU to the inner door rail when no 4-LCD display is installed in the cabinet.	129.78	14.13
28 46 13 31-0454	EA	Cable, USB 3.0 A-B, Male, Long (EST4 4-CABLUSBLG)	77.85	14.13
28 46 13 31-0455	EA	Common Relay Module (EST4 4-COMREL)	81.07	14.13
28 46 13 31-0456	EA	Central Processor Module (EST4 4-CPU)	1,319.51	84.75

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-0457	EA	EST4 Software License, 1 Seat (EST4 4-CUSWL)	657.30	
28 46 13 31-0458		**Control Display Modules** *(28 46 13 31-0406)*		
28 46 13 31-0459	EA	Control Display Module With 24 Indicators (EST4 4-24L)	449.12	84.75
28 46 13 31-0460	EA	Control Display Module With 24 Indicators And 12 Switches (EST4 4-24L12S)	553.95	84.75
28 46 13 31-0461	EA	Control Display Module With 24 Indicators And 18 Switches (EST4 4-24L18S)	553.95	84.75
28 46 13 31-0462	EA	Control Display Module With 24 Indicators And 24 Switches (EST4 4-24L24S)	568.84	84.75
28 46 13 31-0463	EA	Blank Filler Plate (EST4 4-FIL)	31.18	14.13
28 46 13 31-0464		**Liquid Crystal Display (LCD) Modules** *(28 46 13 31-0406)*		
28 46 13 31-0465	EA	LCD Display For EST3 Panels (EST4 4-3LCD) Note: Allows reuse of EST3 UI layer in retrofit applications. The 4-3LCD can be mounted in remote closet cabinets where an LCD display is needed. The display mounts on the 4-CPU module.	859.51	84.75
28 46 13 31-0466	EA	LCD With Cable For Annunciator Enclosure 4-4ANN, 4-6ANN Mounting (EST4 4-LCDANN)	851.65	84.75
28 46 13 31-0467	EA	Display, LCD Module For Audio/Telephone Control (EST4 4-LCDAUDTEL)	591.20	84.75
28 46 13 31-0468	EA	Display, LCD Module With Cable For Audio/Telephone Control For Annunciators (EST4 4-LCDAUDTELANN)	662.59	84.75
28 46 13 31-0469	EA	Display, LCD Module With Cable For Audio/Telephone Control With Bracket For CAB 14 And CAB 21 (EST4 4-LCDAUDTELCAB-CB)	717.84	84.75
28 46 13 31-0470	EA	Display, LCD Module With Cable For Audio/ Telephone Control With Mounting Plate For CAB7, CAB14, CAB21, 4-16ANNMT And 4-24ANNMT Applications (EST4 4-LCDAUDTELCAB-MPLT)	846.32	84.75
28 46 13 31-0471	EA	LCD With Cable For 3-CAB5B, 7B, 14B, 21B, 4-8ANN, 16ANN And 24ANN Mounting (EST4 4-LCDLE)	849.64	84.75
28 46 13 31-0472		**Network Accessories** *(28 46 13 31-0406)*		
28 46 13 31-0473	EA	Firewall (EST4 4-FWAL1) Note: Provides secure connection to external systems. Support us to 8 concurrent IP connections supports connection to 4-USBHUB with printer and/or CDR3, SFP connection to FireWorks and other supported external connections	460.11	
28 46 13 31-0474	EA	Firewall W/DACT (EST4 4-FWAL2) Note: Provides secure connection to external systems. Support us to 8 concurrent IP connections supports connection to 4-USBHUB with printer and/or CDR3, SFP connection to FireWorks and other supported external connections	544.34	
28 46 13 31-0475	EA	Firewall W/EMAIL (EST4 4-FWAL3) Note: Provides secure connection to external systems. Support us to 8 concurrent IP connections supports connection to 4-USBHUB with printer and/or CDR3, SFP connection to FireWorks and other supported external connections	521.34	
28 46 13 31-0476	EA	Firewall W/DACT/ EMAIL/DIAG (EST4 4-FWAL4) Note: Provides secure connection to external systems. Support us to 8 concurrent IP connections supports connection to 4-USBHUB with printer and/or CDR3, SFP connection to FireWorks and other supported external connections	1,510.35	
28 46 13 31-0477	EA	SFP Network Firewall Adapter, CAT5 UTP Copper, 100Base-TX, 100 Mbps (EST4 4-FWAL-CAT)	315.54	28.25
28 46 13 31-0478	EA	SFP Network Firewall Adapter, Multimode, Dual-Fiber, 100Base-FX 1310nm (EST4 4-FWAL-MM)	415.13	28.25
28 46 13 31-0479	EA	SFP Network Firewall Adapter, Single-Mode, Dual-Fiber, 100Base-LX10 1310nm (EST4 4-FWAL-SM)	1,031.16	28.25
28 46 13 31-0480	EA	SFP Network Firewall Adapter, Single-Mode, Single-Fiber, Downlink, 100Base-BX10-D 1550nm/1310nm Tx/Rx (EST4 4-FWAL-SMD) Note: Works with 4-FWAL-SMU	1,249.07	28.25
28 46 13 31-0481	EA	SFP Network Firewall Adapter, Single-Mode, Dual-Fiber, 100Base-High Output 1310nm (EST4 4-FWAL-SMH)	1,348.04	28.25
28 46 13 31-0482	EA	SFP Network Firewall Adapter, Single-Mode, Single-Fiber, Uplink, 100Base-BX10-U 1310nm/1550nm Tx/Rx (EST4 4-FWAL-SMU) Note: Works with 4-FWAL-SMD	1,249.07	28.25
28 46 13 31-0483	EA	Network Adder Module (EST4 4-NET-AD)	622.20	28.25
28 46 13 31-0484	EA	SFP Network Controller, CAT5 UTP Copper, 100Base-TX, 100Mbps (EST4 4-NET-CAT)	465.38	84.75
28 46 13 31-0485	EA	SFP Network Controller, Multimode, Dual-Fiber, 100Base-FX 1310nm (EST4 4-NET-MM)	591.42	84.75
28 46 13 31-0486	EA	SFP Network Controller, Single-Mode, Dual-Fiber, 100Base-LX10 1310nm (EST4 4-NET-SM)	1,316.17	84.75
28 46 13 31-0487	EA	SFP Network Controller, Single-Mode, Single-Fiber, Downlink, 100Base-BX10-D 1550nm/1310nm Tx/Rx (EST4 4-NET-SMD) Note: Works with 4-NET-SMU	1,572.51	84.75
28 46 13 31-0488	EA	SFP Network Controller, Single-Mode, Dual-Fiber, 100Base-High Output 1310nm (EST4 4-NET-SMH)	1,688.96	84.75
28 46 13 31-0489	EA	SFP Network Controller, Single-Mode, Single-Fiber, Uplink, 100Base-BX10-U 1310nm/1550nm Tx/Rx Note: Works with 4-NET-SMD	1,572.51	84.75
28 46 13 31-0490	EA	SFP Network Controller, 2Mbps Shared TX/RX, Twisted Pair (EST4 4-NET-TP)	465.38	84.75
28 46 13 31-0491	EA	SFP Network Controller, 0.3Mbps Shared TX/RX, High Capacitance Twisted Pair (EST4 4-NET-TP-HC)	676.49	84.75
28 46 13 31-0492	EA	Network Extender Module (EST4 4-NET-XT) Note: Mounts to DIN rail on 4-MPLT ordered separately	2,203.18	28.25
28 46 13 31-0493	EA	4-USBHUB Multi-port USB Hub Module (EST4 4-USBHUB) Note: Mounts in a ½ footprint module space and provides isolated RS-232 USB and terminal block connections for RS-232 to CDR connections.	516.50	28.25
28 46 13 31-0494	EA	Coder, PSNI (EST4 CDR-3) Note: Positive, non-interfering, successive and march time codes PSNI code out (relay & tone outputs). March time out (relay & tone outputs). Connects to RS-232 serial port. Requires 1/2 size cabinet footprint and 24 VDC power.	601.09	28.25
28 46 13 31-0495	EA	Field Server Bridge Bracket For FSB-PC2 Or FSB-PCLW (EST4 FSB-BRKT2)	82.67	14.13
28 46 13 31-0496	EA	ECPxml To BMS/Elevator Bridge (EST4 FSB-PC4) Note: Mounts on FSB-BRKT2, ordered separately.	2,289.53	28.25
28 46 13 31-0497	EA	ECPxml To BMS/Elevator Bridge (EST4 FSB-PC4LW) Note: Mounts on FSB-BRKT2, ordered separately.	2,289.53	28.25
28 46 13 31-0498	EA	Ground Fault Detection Module (EST4 GFD) Note: One required for every two 3-NSHM1/2s.	331.88	14.13
28 46 13 31-0499	EA	Isolator Module, RS232 (EST4 IOP3A) Note: For use with short haul modems, VDU-3, CCA Series, CGP Series and FCOM-232, requires 1/2 size cabinet footprint.	1,539.42	452.00

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-0500	EA	MN-FVPN, MN-ABPM, MN-PASM2, MN-COM1S, MN-NETRLY4 And/Or MN-FNS(4)(8) Series Switch Mounting Bracket For EST3 Enclosures (EST4 MN-BRKT1F)	257.77	14.13
28 46 13 31-0501	EA	24 VDC, 4 Fast Ethernet (RJ45), 2 GB SFP, Layer 3 Lite (EST4 MN-FNS4C2F3)	2,917.48	113.00
28 46 13 31-0502	EA	MN-FNS4 Series Switch Holder Bracket (EST4 MN-FNS4HDK1) Note: Used with MN-BRKT Series. One required per switch.	126.81	14.13
28 46 13 31-0503	EA	Desk Top Style, System Printer (EST4 PT-1S)	1,091.79	28.25
28 46 13 31-0504		**Power Supplies** *(28 46 13 31-0406)*		
28 46 13 31-0505	EA	Primary Power Supply With Local Rail Module 120-240V 50/60 Hz (EST4 4-PPS/M)	1,077.42	14.13
28 46 13 31-0506		**Remote Annunciators** *(28 46 13 31-0406)*		
28 46 13 31-0507	EA	LED/SWITCH Driver Module Assembly (EST4 3-EVDVRA) Note: Assembled version of 3-EVDVR, comes packaged with cables, mounting hardware installation instructions used for third party graphics. Mounts in 3-EVDVRX.	705.91	84.75
28 46 13 31-0508	EA	Plastic Mounting Extrusion (EST4 3-EVDVRX) Note: Mounts up to three 3-EVDVRA modules.	120.35	28.25
28 46 13 31-0509	EA	Power Supply Assembly (EST4 3-EVPWRA) Note: Assembled version of 3-EVPWR, comes packaged with cables, mounting hardware and mounting plate for 3-ANNCPU1. Used for third party graphics.	593.82	84.75
28 46 13 31-0510	EA	16 Slots (2 rows of 8), Bronze Annunciator (EST4 4-16ANN) Note: Comes with 4-ANNCPU, Bronze outer and black inner doors. Order wall Mounting assembly 4-16ANNMT (Surface mount) or 3-CAB7B (semi-flush mount), required network Controllers 4-NET-XX series, end user interfaces and required filler plates separately.	1,250.98	84.75
28 46 13 31-0511	EA	Surface Mount Wall Box Assembly For Eight Wide By Two High Annunciators (16 spaces) (EST4 4-16ANNMT)	328.88	22.60
28 46 13 31-0512	EA	24 slots (3 rows of 8), Bronze Annunciator (EST4 4-24ANN) Note: Comes with 4-ANNCPU, Bronze outer and black inner doors. Order wall mounting assembly 4-24ANNMT, required network Controllers 4-NET-XX series, and End User interfaces and required filler plates separately.	1,346.21	84.75
28 46 13 31-0513	EA	Surface Mount Wallbox Assembly For Eight Wide By Three High Annunciator (24 spaces) (EST4 4-24ANNMT)	440.79	22.60
28 46 13 31-0514	EA	LCD Annunciator (EST4 4-2ANN) Note: Comes with 4-LCDANN color touchscreen display, 4-ANNCPU, bronze outer door and black inner door. Order wallbox assembly model 4-2ANNMT and required network Controllers 4-NET-XX separately	1,539.54	84.75
28 46 13 31-0515	EA	Mounting Assembly For 4-2ANN, Two Wide Annunciator (EST4 4-2ANNMT) Note: Supports surface or semiflush mounting. Comes with black wallbox, surface mounting plastic fillers and semi-flush trim.	172.73	42.38
28 46 13 31-0516	EA	Bronze Annunciator (EST4 4-4ANN) Note: Supports 4 slots (1 row of 4). Comes with 4-ANNCPU, bronze outer door and black inner door. Order wall Mounting assembly 4-4ANNMT, required network controllers 4-NET-XX series, any user interfaces and filler plates separately.	881.13	84.75
28 46 13 31-0517	EA	Mounting Assembly For 4-4ANN, Four Wide annunciator (EST4 4-4ANNMT) Note: Supports surface or semiflush mounting. Comes with black wallbox, surface mounting plastic fillers and semi-flush trim.	248.18	42.38
28 46 13 31-0518	EA	Bronze Annunciator, 6 Slots (1 row of 6) (EST4 4-6ANN) Note: Comes with 4-ANNCPU, bronze outer door and black inner door. Order wall Mounting assembly 4-6ANNMT, required network Controllers 4-NET-XX series, any user interfaces and required filler plates separately.	917.90	84.75
28 46 13 31-0519	EA	Mounting Assembly For 4-6ANN, Six Wide Annunciator (EST4 4-6ANNMT) Note: Supports surface or semiflush mounting. Comes with wallbox, surface mounting plastic fillers and semi-flush trip.	286.15	42.38
28 46 13 31-0520	EA	Bronze Annunciator, 8 Slots (2 rows of 4) (EST4 4-8ANN) Note: Comes with 4-ANNCPU, Bronze outer and black inner doors. Order wall Mounting assembly 4-8ANNMT (surface mounting), or 3-CAB5B (Semi-flush mounting) required network Controllers 4-NET-XX series, End User interfaces and required filler plates separately.	1,067.79	84.75
28 46 13 31-0521	EA	Mounting Assembly For 4-8ANN, Four Wide x Two Row High Annunciator (EST4 4-8ANNMT) Note: Supports surface mounting.	368.43	42.38
28 46 13 31-0522	EA	Security Kit (EST4 4-ANNSK) Note: Provides a keyless door latch that allows access to LCD and switches, used for security applications where the display needs to be accessed without the need for a tool to unlock the door for arming, disarming, bypass applications within the protected space.	39.15	
28 46 13 31-0523	EA	Graphic Annunciator Central Processor Module (EST4 4-CPUGRPH)	1,503.51	84.75
28 46 13 31-0524	EA	SFP Network Controller, CAT5 UTP Copper, 100Base-TX, 100Mbps (EST4 4-NET-CAT)	465.38	84.75
28 46 13 31-0525	EA	SFP Network Controller, Multimode, Dual-Fiber, 100Base-FX 1310nm (EST4 4-NET-MM)	591.42	84.75
28 46 13 31-0526	EA	SFP Network Controller, Single-Mode, Dual-Fiber, 100Base-LX10 1310nm (EST4 4-NET-SM)	1,316.17	84.75
28 46 13 31-0527	EA	SFP Network Controller, Single-Mode, Single-Fiber, Downlink, 100Base-BX10-D 1550nm/1310nm Tx/Rx (EST4 4-NET-SMD) Note: Works with 4-NET-SMU	1,572.51	84.75
28 46 13 31-0528	EA	SFP Network Controller, Single-Mode, Dual-Fiber, 100Base-High Output 1310nm (EST4 4-NET-SMH)	1,688.96	84.75
28 46 13 31-0529	EA	SFP Network Controller, Single-Mode, Single-Fiber, Uplink, 100Base-BX10-U 1310nm/1550nm Tx/Rx (EST4 4-NET-SMU) Note: Works with 4-NET-SMD	1,572.51	84.75
28 46 13 31-0530	EA	SFP Network Controller, 2 Mbps Shared TX/RX, Twisted Pair (EST4 4-NET-TP)	465.38	84.75
28 46 13 31-0531	EA	SFP Network Controller, 0.3 Mbps Shared TX/RX, High Capacitance Twisted Pair (EST4 4-NET-TP-HC)	676.49	84.75
28 46 13 31-0532		**Miscellaneous** *(28 46 13 31-0406)*		
28 46 13 31-0533	EA	Service Replacement Bronze Annunciator Door (EST4 4-2ANND) Note: For 4-2ANN annunciators includes the inner and outer doors.	224.90	
28 46 13 31-0534	EA	Service Replacement Part, Plastic Frame Assembly With Mounting Screws (EST4 4-2ANNFA) Note: For 4-2ANN annunciators	79.09	
28 46 13 31-0535	EA	Service Replacement Bronze Annunciator Door (EST4 4-4ANND) Note: For 4-4ANN annunciators includes the inner and outer doors.	244.25	
28 46 13 31-0536	EA	Service Replacement Part, Plastic Frame Assembly With Mounting Screws (EST4 4-4ANNFA) Note: For 4-4ANN annunciators.	114.35	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-0537	EA	Service Replacement Part, Plastic Frame Assembly With Mounting Screws (EST4 4-4X2ANNFA) Note: For 4-8ANN annunciators and 4-CAB5D door assemblies.	178.75	
28 46 13 31-0538	EA	Service Replacement Bronze Annunciator Door (EST4 4-6ANND) Note: For 4-6ANN annunciators, includes the inner and outer door	273.34	
28 46 13 31-0539	EA	Service Replacement Part, Plastic Frame Assembly With Mounting Screws (EST4 4-6ANNFA) Note: For 4-6ANN annunciators.	132.76	
28 46 13 31-0540	EA	Service Replacement Part, Plastic Frame Assembly With Mounting Screws (EST4 4-8ANNFA) Note: For 4-CAB16D and 4-CAB21D(L) door assemblies.	178.75	
28 46 13 31-0541	EA	Annunciator Central Processor Unit (CPU) (EST4 4-ANNCPU) Note: Provides mounting for up to two network controllers, one USB device port, one USB host port and one 4-ANNAUDTEL module.	693.68	84.75
28 46 13 31-0542	EA	Service Replacement Cable, 4-LCD To 4-CPU Flex Interconnect Cable (EST4 4-CABL0502) Note: For CAB5, 7, 14, 21.	113.59	
28 46 13 31-0543	EA	Service Replacement Cable, 4-LCD To 4-ANNCPU Cable (EST4 4-CABL0504) Note: For use in 4-2ANN, 4ANN, 6ANN annunciator configuration.	102.09	
28 46 13 31-0544	EA	Chassis To Door Rail Cable (EST4 4-CABL0505) Note: For 4-CAB16D, 4-CAB24D or 4-CAB24DL use when no LCD display is required.	93.62	8.48
28 46 13 31-0545	EA	Chassis To Door Rail Cable (EST4 4-CABL0507) Note: For 4-CAB8D when no LCD is required.	93.62	8.48
28 46 13 31-0546	EA	Cable, 4-LCDAUDTEL To 4-ANNCPU (EST4 4-CABL0509) Note: For 4-MPLT for CAB7, CAB14, or CAB21	101.48	8.48
28 46 13 31-0547	EA	Service Replacement Cable, 4-3LCD To 4-CPU Cable (EST4 4-CABL0541) Note: For use in 3-CAB5B, 7B, 14B, 21B, RCC series.	98.35	
28 46 13 31-0548	EA	Cable, USB 3.0 A-B, Male, Short (EST4 4-CABLUSBSM)	47.62	8.48
28 46 13 31-0549	EA	Window Replacement (EST4 4-CABWIN16/24) Note: For 4-CAB16D and 4-CAB24D doors	267.26	
28 46 13 31-0550	EA	Main Color Touchscreen LCD Display (EST4 4-LCD)	782.84	84.75
28 46 13 31-0551	EA	Power Limited Label (EST4 4-PL0457) Note: For EST3 updates.	22.06	5.65
28 46 13 31-0552		**Zone Audio Amplifiers** *(28 46 13 31-0406)*		
28 46 13 31-0553	EA	Zoned Amplifier, 20 Watt, Class A/B (EST4 3-ZA20A) Note: 20 Watt selectable for 25 or 70 Vrms Class A/B Output. Mounts in 1 LRM space. Has built in Class A/B NAC rated at 3.5 Amps. Supports one user interface module.	839.69	22.60
28 46 13 31-0554	EA	Zoned Amplifier, 20 Watt, Class B (EST4 3-ZA20B) Note: 20 Watt selectable for 25 or 70 Vrms Class B Output. Mounts in 1 LRM space. Has built in Class B NAC rated at 3.5 Amps. Supports one user interface module.	773.87	22.60
28 46 13 31-0555	EA	Zoned Amplifier, 40 Watt, Class A/B (EST4 3-ZA40A) Note: 40 Watt selectable for 25 or 70 Vrms Class A/B Output. Mounts in 1 LRM space. Has built in Class A/B NAC rated at 3.5 Amps. Supports one user interface module.	1,036.96	22.60
28 46 13 31-0556	EA	Zoned Amplifier, 40 Watt, Class B (EST4 3-ZA40B) Note: 40 Watt selectable for 25 or 70 Vrms Class B Output. Mounts in 1 LRM space. Has built in Class B NAC rated at 3.5 Amps. Supports one user interface module.	953.97	22.60
28 46 13 31-0557	EA	Zoned Amplifier, 95 Watt, Class B (EST4 3-ZA95) Note: 95 Watt selectable for 25 or 70 Vrms Class B Output. Mounts in 2 LRM spaces. Supports two user interface modules.	2,004.43	22.60
28 46 13 31-0558		**Simplex Fire Alarm** *(28 46 13 31)*		
28 46 13 31-0559		**4100 Fire Alarm Control Panel** *(28 46 13 31-0558)*		
28 46 13 31-0560	EA	4100U Master Controller Assembly With LCD And Operator Interface, 9 Amperes System Power Supply/Battery Charger (SPS), 250 Point IDNet Interface, 3 NACS, Auxiliary Relay And External RUI Communications Interface, 120 Volt AC Input (Simplex 4100-9111)	6,954.96	564.00
28 46 13 31-0561	EA	4100ES NDU With Master Controller, LCD And Operator Interface, Network Interface Module (Select Media Card Separately), 9 Amperes System Power Supply/Battery Charger, And External RUI Communications Interface (Power Supply/Battery Charger Is An SPS With Its IDNet Channel And NACs Disabled), 120 Volt AC Input (Simplex 4100-9141)	7,628.08	564.00
28 46 13 31-0562	EA	4100ES NDU With VCC Includes The First Bay Equipment Described For The NDU And A Second Bay Assembly With Separate: Master Controller For Voice Functions, Network Interface (Select Media Card Separately), And A Standard SPS With 250 Point IDNet Channel; And 3, 3 A Class A/B NACs Capable Of SmartSync Two-Wire Operation, 120 V Input (Simplex 4100-9142)	11,153.53	564.00
28 46 13 31-0563	EA	Up To 127 Points, IDNet Module, (Simplex 4100-3104) Note: Add-on module.	4,309.75	564.00
28 46 13 31-0564	EA	Up To 64 Points, IDNet Module, (Simplex 4100-3105) Note: Add-on module.	3,283.21	564.00
28 46 13 31-0565	EA	Expansion Power Supply, 3 NACs, 120 Volt AC (Simplex 4100-5101) Note: Add-on module.	2,296.50	141.01
28 46 13 31-0566	EA	Alarm Relay, 3 Form C Relays, 2 Amperes At 32 Volt DC, For SPS Or RPS (Simplex 4100-6033) Note: Add-on module.	480.87	28.20
28 46 13 31-0567	EA	Dual Port RS-232 Interface Card (Simplex 4100-6038) Note: Add-on module.	1,399.42	28.20
28 46 13 31-0568		**4100U Back Box** *(28 46 13 31-0558)*		
28 46 13 31-0569	EA	2 Bay Back Box With Glass Door And Dress Panel (Simplex 2975-9425) Note: 24" x 40" beige backbox.	2,403.61	112.80
28 46 13 31-0570	EA	3 Bay Back Box With Glass Door And Dress Panel (Simplex 2975-9443) Note: 24" x 56" beige backbox.	3,402.30	112.80
28 46 13 31-0571		**DACT (Digital Alarm Communicator Transmitter)** *(28 46 13 31-0558)*		
28 46 13 31-0572	EA	6 Zone Fire Control Communicator (Silent Knight SK-5104)	1,318.03	56.40

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-0573		**4010 Fire Alarm Control Panel** *(28 46 13 31-0558)*		
28 46 13 31-0574	EA	120 Volt AC Fire Alarm Control Panel With Door, Cabinet, Power Supply/Battery Charger, IDNet Interface, 4 NACs, 2 Programmable Auxiliary Relays, External N2 Communications Interface, And Internal Common Event Reporting DACT (Simplex 4010-9101)	6,542.28	564.00
28 46 13 31-0575	EA	240 Volt AC Fire Alarm Control Panel With Door, Cabinet, Power Supply/Battery Charger, IDNet Interface, 4 NACs, 2 Programmable Auxiliary Relays, And External N2 Communications Interface (Simplex 4010-9201)	6,337.77	564.00
28 46 13 31-0576	EA	Dual Circuit Class A NAC Adapter Module (Simplex 4010-9806)	242.28	28.20
28 46 13 31-0577	EA	Dual RS-232 Interface Module Expansion Slot Option (Simplex 4010-9811)	1,087.77	28.20
28 46 13 31-0578	EA	Single RS-232 Interface Module With Service Modem Connection Expansion Slot Option (Simplex 4010-9812)	1,499.59	28.20
28 46 13 31-0579	EA	120 Volt AC, 4 Amperes, Expansion Power Supply Expansion Module (Simplex 4010-9813)	765.25	28.20
28 46 13 31-0580	EA	240 Volt AC, 4 Amperes, Expansion Power Supply Expansion Module (Simplex 4010-9823)	829.00	28.20
28 46 13 31-0581	EA	Battery Meter Module Expansion Module (Simplex 4010-9820)	304.22	28.20
28 46 13 31-0582		**Printer** *(28 46 13 31-0558)*		
28 46 13 31-0583	EA	24 Pin Dot Matrix Printer (Simplex 4190-9013)	2,421.69	28.20
28 46 13 31-0584		**NAC Panel / Power Booster** *(28 46 13 31-0558)*		
28 46 13 31-0585	EA	120 Volt AC, IDNet NAC Extender With 4, Class B (Style Y) NACs And 8 Amperes Power Supply (Simplex 4009-9201) Note: Power supply for horns and strobes.	1,518.79	141.01
28 46 13 31-0586		**Battery** *(28 46 13 31-0558)*		
28 46 13 31-0587	EA	50 Ampere Hours Sealed Lead Acid Battery (Simplex 2081-9296) Note: Two required for 24 volt DC.	972.83	28.20
28 46 13 31-0588	EA	33 Ampere Hours Sealed Lead Acid Battery (Simplex 2081-9276) Note: Two required for 24 volt DC.	642.58	28.20
28 46 13 31-0589	EA	6.2 Ampere Hours Sealed Lead Acid Battery (Simplex 2081-9272) Note: Two required for 24 volt DC.	224.28	28.20
28 46 13 31-0590		**Interface Modules** *(28 46 13 31-0558)*		
28 46 13 31-0591	EA	Supervised Individual Addressable Modules (Simplex 4090-9001) Note: Monitor modules for waterflow / tamper, etc.	178.90	28.20
28 46 13 31-0592	EA	Relay Individual Addressable Modules (Simplex 4090-9002) Note: Control modules for gas shutdown, door holders, etc.	382.75	28.20
28 46 13 31-0593	EA	Relay SPDT With LED MR-801/T (Simplex 2088-9032) Note: Interface relay for 120VAC	82.86	28.20
28 46 13 31-0594	EA	SmartSync™ Adapter Module For Non-Addressable Notification Appliance Circuits (NACs) (Simplex 4905-9815)	181.14	28.20
28 46 13 31-0595	EA	Surface Mount Cover Plate For SmartSync Adapter Module (Simplex 4905-9817)	79.99	14.10
28 46 13 31-0596	EA	Flush Mount Cover Plate For SmartSync Adapter Module (Simplex 4905-9818)	75.67	14.10
28 46 13 31-0597		**Pull Stations** *(28 46 13 31-0558)*		
28 46 13 31-0598	EA	Addressable Single Action Manual Pull Station (Simplex 4099-9001)	222.63	28.20
28 46 13 31-0599	EA	N.O. Contacts, Single Action, Non-Coded, Non-Addressable Manual Pull Stations (Simplex 2099-9101)	155.68	28.20
28 46 13 31-0600	EA	N.C. Contacts, Single Action, Non-Coded, Non-Addressable Manual Pull Stations (Simplex 2099-9102)	168.62	28.20
28 46 13 31-0601	EA	Break-Glass, Double Action, Non-Coded, Non-Addressable Manual Pull Stations (Simplex 2099-9103)	149.85	28.20
28 46 13 31-0602	EA	N.O. Contacts, Break-Glass, Double Action, Non-Coded, Non-Addressable Manual Pull Stations (Simplex 2099-9104)	177.26	28.20
28 46 13 31-0603	EA	N.C. Contacts, Break-Glass, Double Action, Non-Coded, Non-Addressable Manual Pull Stations (Simplex 2099-9105)	275.75	28.20
28 46 13 31-0604	EA	Single Action, Pre-Signal, N.O. Contacts, Non-Coded, Non-Addressable Manual Pull Stations (Simplex 2099-9107)	229.05	28.20
28 46 13 31-0605	EA	Break-Glass, Pre-Signal, N.O. Contacts, Double Action, Non-Coded, Non-Addressable Manual Pull Stations (Simplex 2099-9108)	272.21	28.20
28 46 13 31-0606	EA	Single Action, Non-Coded, Non-Addressable Manual Pull Stations (Simplex 2099-9754)	119.71	28.20
28 46 13 31-0607	EA	Local Alarm Cover, Single Action, Non-Coded, Non-Addressable Manual Pull Stations (Simplex 2099-9755)	127.61	28.20
28 46 13 31-0608	EA	Push, Double Action, Non-Coded, Non-Addressable Manual Pull Stations (Simplex 2099-9756)	153.05	28.20
28 46 13 31-0609	EA	N.C. Contacts, Push, Double Action, Non-Coded, Non-Addressable Manual Pull Stations (Simplex 2099-9758)	245.50	28.20
28 46 13 31-0610	EA	Pre-Signal, N.O. Contacts, Push, Double Action, Non-Coded, Non-Addressable Manual Pull Stations (Simplex 2099-9759)	434.58	28.20
28 46 13 31-0611	EA	Institutional Cover, Single Action, Non-Coded, Non-Addressable Manual Pull Stations (Simplex 2099-9762)	134.10	28.20
28 46 13 31-0612	EA	Surface Mount Steel Box For Manual Pull Station (Simplex 2975-9178)	84.32	14.10
28 46 13 31-0613		**Weatherproof Pull Stations** *(28 46 13 31-0558)*		
28 46 13 31-0614	EA	Weather Proof Single Action Pull Station, Cast Metal, B Lock, SPST (Simplex 2099-9138)	214.46	33.84
28 46 13 31-0615	EA	Surface Mount Cast Aluminum Box For Exterior Pull Station (Simplex 2975-9211)	141.66	14.10
28 46 13 31-0616		**Heat / Smoke Sensor** *(28 46 13 31-0558)*		
28 46 13 31-0617	EA	32 To 122 Degree F Heat Sensor (Simplex 4098-9733)	211.75	42.30
28 46 13 31-0618	EA	Photoelectric Smoke Sensor (Simplex 4098-9714)	317.70	42.30
28 46 13 31-0619	EA	Sensor Base With Relay Driver (Simplex 4098-9791)	651.83	14.10
28 46 13 31-0620	EA	Standard Sensor Base (Simplex 4098-9792)	327.93	14.10

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-0621	EA	Remote Supervised Relay Accessory For Sensor Base With Relay Driver (Simplex 2098-9737) Note: Relay for 4098-9791	179.69	28.20
28 46 13 31-0622		**Explosion Proof Heat Detector** *(28 46 13 31-0558)*		
28 46 13 31-0623	EA	135 Degree F Explosion Proof Heat Detector (Simplex 2098-9488)	225.30	42.30
28 46 13 31-0624	EA	Explosion Proof Back Box (Killark JLX-21)	153.40	14.10
28 46 13 31-0625	EA	Explosion Proof Back Box Plugs (Killark CUP-2)	13.29	2.82
28 46 13 31-0626		**Weatherproof Heat Detector** *(28 46 13 31-0558)*		
28 46 13 31-0627	EA	194 Degree F Fixed Hardwired Weatherproof Heat Detector (Simplex 2098-9490)	157.22	42.30
28 46 13 31-0628		**200 Degree F Heat Detector** *(28 46 13 31-0558)*		
28 46 13 31-0629	EA	194 Degree F Heat Detector, ROR/Fixed Temperature (Simplex 5604) Note: Used in kiln rooms and kitchens.	126.79	42.30
28 46 13 31-0630		**Duct Smoke Sensor** *(28 46 13 31-0558)*		
28 46 13 31-0631	EA	Duct Sensor Housing (Simplex 4098-9755)	521.72	22.56
28 46 13 31-0632	EA	Duct Sensor Housing With Supervised Output For Multiple Remote Relays, 4-Wire (Simplex 4098-9756) Note: Relay output for AHU shutdown.	693.90	50.76
28 46 13 31-0633	EA	46" To 71" Duct Sampling Tube (Simplex 2098-9798) Note: 25", 49", 73" or 97" sampling tube length.	73.22	14.10
28 46 13 31-0634	EA	Remote Duct Test Station With Key Switch And Red LED Status Indicator (Simplex 2098-9806)	170.06	42.30
28 46 13 31-0635		**Interior Horn** *(28 46 13 31-0558)*		
28 46 13 31-0636	EA	Red With White FIRE Lettering, TrueAlert Addressable Electronic Horn (Simplex 4901-9850)	155.90	42.30
28 46 13 31-0637	EA	White With Red FIRE Lettering, TrueAlert Addressable Electronic Horn (Simplex 4901-9853)	155.90	42.30
28 46 13 31-0638		**Interior Horn Strobe** *(28 46 13 31-0558)*		
28 46 13 31-0639	EA	75Cd, Wall Mounted Horn Strobe, Red (Simplex 4903-9426)	223.23	42.30
28 46 13 31-0640	EA	110Cd, Wall Mounted Horn Strobe, Red (Simplex 4903-9427)	223.23	42.30
28 46 13 31-0641	EA	Wall Mount, Red Housing, White Lettering, Horn And Intensity Selectable (15, 30, 75 Or 110 Candela) Multi-Candela Strobe (Simplex 4906-9127)	207.87	42.30
28 46 13 31-0642	EA	Ceiling Mount, Red Housing, White Lettering, Horn And Intensity Selectable (15, 30, 75 Or 110 Candela) Multi-Candela Strobe (Simplex 4906-9128)	207.87	42.30
28 46 13 31-0643	EA	Wall Mount, White Housing, Red Lettering, Horn And Intensity Selectable (15, 30, 75 Or 110 Candela) Multi-Candela Strobe (Simplex 4906-9129)	207.87	42.30
28 46 13 31-0644	EA	Ceiling Mount, White Housing, Red Lettering, Horn And Intensity Selectable (15, 30, 75 Or 110 Candela) Multi-Candela Strobe (Simplex 4906-9130)	207.87	42.30
28 46 13 31-0645	EA	Weatherproof, Red Housing, White Lettering, Horn And Intensity Selectable (15, 60 Or 75 Candela) Multi-Candela Strobe (Simplex 4906-9131)	213.02	42.30
28 46 13 31-0646	EA	Weatherproof, White Housing, Red Lettering, Horn And Intensity Selectable (15, 60 Or 75 Candela) Multi-Candela Strobe (Simplex 4906-9132)	213.02	42.30
28 46 13 31-0647	EA	Wall Mount, Red Housing, White Lettering, Horn And Intensity Selectable (135, 177 Or 185 Candela) Multi-Candela Strobe (Simplex 4906-9139)	222.07	42.30
28 46 13 31-0648	EA	Ceiling Mount, Red Housing, White Lettering, Horn And Intensity Selectable (135, 177 Or 185 Candela) Multi-Candela Strobe (Simplex 4906-9140)	217.90	42.30
28 46 13 31-0649	EA	Wall Mount, White Housing, Red Lettering, Horn And Intensity Selectable (135, 177 Or 185 Candela) Multi-Candela Strobe (Simplex 4906-9141)	222.07	42.30
28 46 13 31-0650	EA	Ceiling Mount, White Housing, Red Lettering, Horn And Intensity Selectable (135, 177 Or 185 Candela) Multi-Candela Strobe (Simplex 4906-9142)	217.90	42.30
28 46 13 31-0651	EA	Wall Mount, Red Housing, White Lettering, Horn And Intensity Selectable (15, 30, 75 Or 110 Candela) Multi-Candela Addressable Strobe (Simplex 4906-9227)	207.87	42.30
28 46 13 31-0652	EA	Ceiling Mount, Red Housing, White Lettering, Horn And Intensity Selectable (15, 30, 75 Or 110 Candela) Multi-Candela Addressable Strobe (Simplex 4906-9228)	207.87	42.30
28 46 13 31-0653	EA	Wall Mount, White Housing, Red Lettering, Horn And Intensity Selectable (15, 30, 75 Or 110 Candela) Multi-Candela Addressable Strobe (Simplex 4906-9229)	207.87	42.30
28 46 13 31-0654	EA	Ceiling Mount, White Housing, Red Lettering, Horn And Intensity Selectable (15, 30, 75 Or 110 Candela) Multi-Candela Addressable Strobe (Simplex 4906-9230)	207.87	42.30
28 46 13 31-0655		**Interior Strobe** *(28 46 13 31-0558)*		
28 46 13 31-0656	EA	Wall Mount, Red Housing, White Lettering, Intensity Selectable (15, 30, 75 Or 110 Candela) Multi-Candela Strobe (Simplex 4906-9101)	175.24	42.30
28 46 13 31-0657	EA	Ceiling Mount, Red Housing, White Lettering, Intensity Selectable (15, 30, 75 Or 110 Candela) Multi-Candela Strobe (Simplex 4906-9102)	175.24	42.30
28 46 13 31-0658	EA	Wall Mount, White Housing, Red Lettering, Intensity Selectable (15, 30, 75 Or 110 Candela) Multi-Candela Strobe (Simplex 4906-9103)	175.17	42.30
28 46 13 31-0659	EA	Ceiling Mount, White Housing, Red Lettering, Intensity Selectable (15, 30, 75 Or 110 Candela) Multi-Candela Strobe (Simplex 4906-9104)	175.24	42.30
28 46 13 31-0660	EA	Weatherproof, Red Housing, White Lettering, Intensity Selectable (15, 60 Or 75 Candela) Multi-Candela Strobe (Simplex 4906-9105)	194.75	42.30
28 46 13 31-0661	EA	Weatherproof, White Housing, Red Lettering, Intensity Selectable (15, 60 Or 75 Candela) Multi-Candela Strobe (Simplex 4906-9106)	194.75	42.30
28 46 13 31-0662	EA	Wall Mount, Red Housing, White Lettering, Intensity Selectable (135, 177 Or 185 Candela) Multi-Candela Strobe (Simplex 4906-9109)	196.00	42.30

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-0663	EA	Ceiling Mount, Red Housing, White Lettering, Intensity Selectable (135, 177 Or 185 Candela) Multi-Candela Strobe (Simplex 4906-9110)	199.40	42.30
28 46 13 31-0664	EA	Wall Mount, White Housing, Red Lettering, Intensity Selectable (135, 177 Or 185 Candela) Multi-Candela Strobe (Simplex 4906-9111)	199.40	42.30
28 46 13 31-0665	EA	Ceiling Mount, White Housing, Red Lettering, Intensity Selectable (135, 177 Or 185 Candela) Multi-Candela Strobe (Simplex 4906-9112)	199.40	42.30
28 46 13 31-0666	EA	Wall Mount, Red Housing, White Lettering, Intensity Selectable (15, 30, 75 Or 110 Candela) Multi-Candela Addressable Strobe (Simplex 4906-9201)	175.24	42.30
28 46 13 31-0667	EA	Ceiling Mount, Red Housing, White Lettering, Intensity Selectable (15, 30, 75 Or 110 Candela) Multi-Candela Addressable Strobe (Simplex 4906-9202)	175.24	42.30
28 46 13 31-0668	EA	Wall Mount, White Housing, Red Lettering, Intensity Selectable (15, 30, 75 Or 110 Candela) Multi-Candela Addressable Strobe (Simplex 4906-9203)	175.24	42.30
28 46 13 31-0669	EA	Ceiling Mount, White Housing, Red Lettering, Intensity Selectable (15, 30, 75 Or 110 Candela) Multi-Candela Addressable Strobe (Simplex 4906-9204)	175.24	42.30
28 46 13 31-0670		**Interior Speakers** *(28 46 13 31-0558)*		
28 46 13 31-0671	EA	Red With White FIRE Lettering, Wall Mount Speaker, Rectangular Housing (Simplex 4902-9716)	139.38	42.30
28 46 13 31-0672	EA	White With Red FIRE Lettering, Wall Mount Speaker, Rectangular Housing (Simplex 4902-9717)	139.38	42.30
28 46 13 31-0673	EA	Ceiling Or Wall Mount, Round Housing Speaker (Simplex 4902-9721)	139.38	42.30
28 46 13 31-0674		**Interior Speaker Strobe** *(28 46 13 31-0558)*		
28 46 13 31-0675	EA	Red Housing, White Lettering, Multi-Tapped Speaker And Intensity Selectable (15, 30, 75 Or 110 Candela) Multi-Candela Strobe (Simplex 4906-9151)	238.44	42.30
28 46 13 31-0676	EA	White Housing, Red Lettering, Multi-Tapped Speaker And Intensity Selectable (15, 30, 75 Or 110 Candela) Multi-Candela Strobe (Simplex 4906-9153)	238.44	42.30
28 46 13 31-0677		**Surge Suppressors** *(28 46 13 31-0558)*		
28 46 13 31-0678	EA	Overvoltage Suppressor (Simplex 2081-9044)	162.22	8.46
28 46 13 31-0679	EA	Isolated Loop Circuit Protector (Simplex 2081-9028)	102.43	8.46
28 46 13 31-0680	EA	120 Volt AC, 20 Amperes, Multi Stage Hybrid Surge Protector With EMI/RFI Filtering (Ditek 120S20A)	351.71	8.46
28 46 13 31-0681	EA	24 Volt AC, Data And Loop Circuit Surge Protector (Ditek DTK-2MHLP24B)	117.84	8.46
28 46 13 31-0682	EA	Mounting Base For Two DTK-2MHLP (Ditek DTK-2MB)	176.99	14.10
28 46 13 31-0683	EA	120 Volt AC, 22,500 Amperes, Equipment Panel/Dedicated Circuit Surge Protector (Ditek DTK-120HW)	120.90	8.46
28 46 13 31-0684	EA	<105 Volt AC, 9,000 Amperes, RJ31 Connection, Alarm Dialer Surge Protection (Ditek DTK-MRJ31SCWP)	90.08	8.46
28 46 13 31-0685		**Boxes And Adapters** *(28 46 13 31-0558)*		
28 46 13 31-0686	EA	Semi-Flush Mount Modular Adapter Using Standard 4" Square Electrical Box (Simplex 4905-9921)	75.67	14.10
28 46 13 31-0687	EA	Surface Mount Modular Adapter Using Simplex Box (Simplex 4905-9925)	71.36	14.10
28 46 13 31-0688	EA	Red, Surface Mount Adapter Skirt (Simplex 4905-9937)	62.90	14.10
28 46 13 31-0689	EA	White, Surface Mount Adapter Skirt (Simplex 4905-9940)	50.89	14.10
28 46 13 31-0690		**Accessories** *(28 46 13 31-0558)*		
28 46 13 31-0691	EA	End-Of-Line Resistor Harness, 10 k Ohms, 1/2 Watt, Two Required, One Each For Audible And Visible Output (Simplex 4081-9008)	33.22	14.10
28 46 13 31-0692		**Siemens Fire Alarm** *(28 46 13 31)*		
28 46 13 31-0693		**Conventional Control Panels** *(28 46 13 31-0692)*		
28 46 13 31-0694		**SXL Batteries And Power Supplies** *(28 46 13 31-0693)*		
28 46 13 31-0695	EA	6 Amperes Notification Appliance Circuit Expander With Built-In Auxiliary Power Output (Siemens PAD-3)	1,377.55	56.40
28 46 13 31-0696	EA	Main Board Only For PAD-3 (Siemens PAD-3-MB)	1,104.76	56.40
28 46 13 31-0697		**Digital Fire Communicators** *(28 46 13 31-0693)*		
28 46 13 31-0698	EA	Four Channel Digital Slave Fire Communicator (Siemens 5129)	1,068.80	56.40
28 46 13 31-0699		**Addressable Control Panels** *(28 46 13 31-0692)*		
28 46 13 31-0700		**Fireseeker Equipment** *(28 46 13 31-0699)*		
28 46 13 31-0701		**FS-250 System Panels** *(28 46 13 31-0700)*		
28 46 13 31-0702	EA	FS-250 Electronics Package Including One FS-250-CON And Two FS-NPE, Excludes Enclosure (Siemens FS-250-EKIT) Note: FS-250-CON is an electronics package for releasing water or agent. FS-NPE is a system transformer.	3,131.76	564.00
28 46 13 31-0703	EA	FS-250 Electronics Package Including One FS-250-CON, Two FS-NPE, One FS-RPT And One FS-REL, Excludes Enclosure (Siemens FS-250-REL-EKIT) Note: FS-250-CON is an electronics package for releasing water or agent. FS-NPE is a system transformer. FS-RPT is a releasing power transformer. FS-REL is a Releasing Module.	3,965.01	564.00
28 46 13 31-0704	EA	FS-250-SRX Releasing Electronics Package Including One FS-250-CON2-SRX, Two FS-NPE, One FS-RPT And One FS-REL, Excludes Enclosure (Siemens FS-250-SRX-EKIT) Note: FS-250-CON2-SRX is an electronics package for releasing water or agent. FS-NPE is a system transformer. FS-RPT is a releasing power transformer. FS-REL is a Releasing Module.	2,315.95	451.20
28 46 13 31-0705	EA	Electronics Package For Releasing Water Or Agent (Siemens FS-250-CON)	3,136.72	564.00

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-0706		**FS-250 Optional Modules** *(28 46 13 31-0700)*		
28 46 13 31-0707	EA	Main Board Module (Siemens FS-MB2)	1,387.47	56.40
28 46 13 31-0708	EA	Display Board Module (Siemens FS-DB2)	1,088.04	28.20
28 46 13 31-0709	EA	Device Loop Card (Siemens FS-DLC)	889.65	28.20
28 46 13 31-0710	EA	Releasing Module (Siemens FS-REL)	388.71	28.20
28 46 13 31-0711	EA	Remote LCD Annunciator (Siemens FS-RD2)	883.45	28.20
28 46 13 31-0712	EA	Relay Processor Card (Siemens FS-RU2)	765.65	28.20
28 46 13 31-0713	EA	Relay Expander Board (Siemens FS-RE8)	651.58	28.20
28 46 13 31-0714	EA	Serial Annunciator Processor Card (Siemens FS-SAU2)	883.45	28.20
28 46 13 31-0715	EA	16 Output Annunciator Extender (Siemens FS-SAE16)	686.29	28.20
28 46 13 31-0716	EA	Digital Alarm Communication Transmitter (Siemens FS-DACT)	623.06	28.20
28 46 13 31-0717	EA	Municipal Tie Module (Siemens FS-MT)	527.58	28.20
28 46 13 31-0718	EA	Configuration Tool Including Laptop To FS-250 Cable And Software (Siemens FS-CT2)	468.67	
28 46 13 31-0719	EA	Programming Cable Kit (Siemens CBL-UD)	123.68	14.10
28 46 13 31-0720	EA	Notification Appliance Circuit Power Expander Transformer (Siemens FS-NPE)	221.31	28.20
28 46 13 31-0721	EA	Releasing Power Transformer (Siemens FS-RPT-A)	225.03	28.20
28 46 13 31-0722	EA	Surface Mounted Box For Remote LCD Annunciator (Siemens FS-RD-SB)	258.39	22.56
28 46 13 31-0723	EA	Cabinet Trim Kit (Siemens RD-CAB-TK)	429.94	14.10
28 46 13 31-0724		**Firefinder Systems** *(28 46 13 31-0699)*		
28 46 13 31-0725		**XLS Basic Fire System Packages Without Back Box** *(28 46 13 31-0724)*		
28 46 13 31-0726	EA	500 Point Firefinder Package Including Two DLC, One PMI, One ZIC-4A, One CC-5, One PSC-12 And One ID-SP (Siemens XLS-500-ID-SP) Note: DLC is a device loop card. PMI is a person machine interface. ZIC-4A is a four circuit zone indicating card. CC-5 is a five slot card cage. PSC-12 is a 12 Amp power supply charger module. ID-SP is an inner door blank single plate.	11,373.36	564.00
28 46 13 31-0727	EA	250 Point Firefinder Package Including One DLC, One PMI, One ZIC-4A, One CC-5, One PSC-12 And One ID-SP (Siemens XLS-250-ID-SP) Note: DLC is a device loop card. PMI is a person machine interface. ZIC-4A is a four circuit zone indicating card. CC-5 is a five slot card cage. PSC-12 is a 12 Amp power supply charger module. ID-SP is an inner door blank single plate.	9,957.34	564.00
28 46 13 31-0728	EA	250 Point Firefinder Package Including One DLC, One PMI-INT, One ZIC-4A, One CC-5, One PSC-12 And One ID-SP (Siemens XLS-250-INT-ID-SP) Note: DLC is a device loop card. PMI-INT is a person machine interface with multilingual overlays. ZIC-4A is a four circuit zone indicating card. CC-5 is a five slot card cage. PSC-12 is a 12 Amp power supply charger module. ID-SP is an inner door blank single plate.	9,957.34	564.00
28 46 13 31-0729	EA	250 Point Firefinder Package Including One DLC, One PMI, One ZIC-4A, One CC-5, One PSC-12, One CAB2-BD And One OD-LP (Siemens XLS-250-CAB2-BD) Note: DLC is a device loop card. PMI is a person machine interface. ZIC-4A is a four circuit zone indicating card. CC-5 is a five slot card cage. PSC-12 is a 12 Amp power supply charger module. CAB2-BD is a two row inner and outer door set. OD-LP is an outer door clear plastic lens plate.	16,995.30	564.00
28 46 13 31-0730	EA	250 Point Firefinder Package Including One DLC, One PMI, One ZIC-4A, One CC-5, One PSC-12, One CAB3-BD, One BCL, One ID-SP And One OD-LP (Siemens XLS-250-CAB3-BD) Note: DLC is a device loop card. PMI is a person machine interface. ZIC-4A is a four circuit zone indicating card. CC-5 is a five slot card cage. PSC-12 is a 12 Amp power supply charger module. CAB3-BD is a three row inner and outer door set. ID-SP is an inner door blank single plate. OD-LP is an outer door clear plastic lens plate.	17,583.03	564.00
28 46 13 31-0731	EA	250 Point Firefinder Package Including One DLC, One PMI, One ZIC-4A, One CC-5, And One PSC-12 (Siemens XLS-250-ZIC4A-EP) Note: DLC is a device loop card. PMI is a person machine interface. ZIC-4A is a four circuit zone indicating card. CC-5 is a five slot card cage. PSC-12 is a 12 Amp power supply charger module.	9,814.75	564.00
28 46 13 31-0732	EA	250 Point Firefinder Package Including One DLC, One PMI-INT, One ZIC-4A, One CC-5, And One PSC-12 (Siemens XLS-250-ZIC4A-INT-EP) Note: DLC is a device loop card. PMI-INT is a person machine interface with multilingual overlays. ZIC-4A is a four circuit zone indicating card. CC-5 is a five slot card cage. PSC-12 is a 12 Amp power supply charger module.	9,814.75	564.00
28 46 13 31-0733	EA	250 Point Firefinder Package Including One DLC, One PMI, One ZIC-8B, One CC-5, And One PSC-12 (Siemens XLS-250-ZIC8B-EP) Note: DLC is a device loop card. PMI is a person machine interface. ZIC-8B is an eight circuit zone indicating card. CC-5 is a five slot card cage. PSC-12 is a 12 Amp power supply charger module.	11,471.32	564.00
28 46 13 31-0734		**Firefinder - XLS Basic System Equipment** *(28 46 13 31-0724)*		
28 46 13 31-0735	EA	Person Machine Interface With Central Processor (Siemens PMI) Note: Includes inner door.	5,260.75	564.00
28 46 13 31-0736	EA	Person Machine Interface With Central Processor, DE-2 And DPU (Siemens PMI-DPU-ENC) Note: Includes inner door.	8,919.85	564.00
28 46 13 31-0737	EA	Person Machine Interface With Multilingual Overlays And Central Processor (Siemens PMI-INT) Note: Includes inner door.	5,260.75	564.00
28 46 13 31-0738	EA	Two Slot Card Cage (Siemens CC-2)	671.42	28.20
28 46 13 31-0739	EA	Five Slot Card Cage (Siemens CC-5)	1,143.84	28.20
28 46 13 31-0740	EA	Four Circuit Zone Indicating Card (Siemens ZIC-4A)	1,639.82	28.20
28 46 13 31-0741	EA	Eight Circuit Zone Indicating Card (Siemens ZIC-8B)	1,712.97	28.20
28 46 13 31-0742	EA	Two Channel Adapter Card For ZIC-8B (Siemens ZIC-2C)	532.54	28.20
28 46 13 31-0743	EA	Device Loop Card (Siemens DLC) Note: Interfaces with up to 252 detectors and devices.	1,946.08	28.20
28 46 13 31-0744	EA	Controllable Relay Card (Siemens CRC-6) Note: Provides six programmable relays.	1,096.72	28.20
28 46 13 31-0745	EA	12 Amperes Power Supply Charger Module (Siemens PSC-12)	4,189.15	28.20
28 46 13 31-0746	EA	Person Machine Interface With Central Processor And GPMI-UK Software Upgrade Kit (Siemens GPMI) Note: Software kit provides interface with multiple FireFinder XLS and MXL systems.	6,914.85	564.00

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-0747	EA	Network Interface Card (Siemens NIC-C) Note: Provides HNET Or XNET communication between enclosures.	1,285.19	28.20
28 46 13 31-0748	EA	12 Amperes Power Supply Extender (Siemens PSX-12) Note: Extends PSC-12 with an additional 24 volt DC.	3,482.38	28.20
28 46 13 31-0749	EA	Power Termination Board (Siemens PTB) Note: Used with systems requiring more than one PSX-12.	577.18	28.20
28 46 13 31-0750	EA	Conventional Detector Card (Siemens CDC-4)	1,238.07	28.20
28 46 13 31-0751	EA	Multi-Mode Network Fiber Optic Interface Module (Siemens D2300CPS)	2,437.10	28.20
28 46 13 31-0752	EA	Single-Mode Network Fiber Optic Interface Module (Siemens D2325CPS)	8,795.57	28.20
28 46 13 31-0753		**Remote Lobby Enclosure** *(28 46 13 31-0724)*		
28 46 13 31-0754	EA	14-1/2" x 18-1/2" x 5" Two Module Remote Enclosure (Siemens REMBOX2) Note: Flush mounted. Includes clear lens plate on cover.	1,573.43	112.80
28 46 13 31-0755	EA	24" x 18-1/2" x 5" Four Module Remote Enclosure (Siemens REMBOX4) Note: Flush mounted. Includes clear lens plate on cover.	2,044.61	112.80
28 46 13 31-0756	EA	Optional Mounting Plate For REMBOX2 (Siemens REMBOX2-MP) Note: Required to mount up to four SIM-16 or OCM-16 modules.	246.11	28.20
28 46 13 31-0757	EA	Optional Mounting Plate For REMBOX4 (Siemens REMBOX4-MP) Note: Required to mount up to eight SIM-16 or OCM-16 modules.	269.67	28.20
28 46 13 31-0758		**Battery Enclosures** *(28 46 13 31-0724)*		
28 46 13 31-0759	EA	Enclosure For 100 Ampere Hours Batteries (Siemens CAB-BATT)	958.41	112.80
28 46 13 31-0760		**Graphic Annunciator Output Drivers And Inputs** *(28 46 13 31-0724)*		
28 46 13 31-0761	EA	Output Control Module (Siemens OCM-16)	789.21	28.20
28 46 13 31-0762	EA	Supervised Input Module (Siemens SIM-16)	789.21	28.20
28 46 13 31-0763		**Remote LCD Displays** *(28 46 13 31-0724)*		
28 46 13 31-0764	EA	Remote LED/LCD System Status Display (Siemens SSD) Note: No control or menu capability.	1,822.05	84.60
28 46 13 31-0765	EA	Remote LED/LCD System Status Display, Buttons To Acknowledge Events, Silence Audible Circuits And Resetting (Siemens SSD-C)	2,058.88	84.60
28 46 13 31-0766		**Voice Equipment** *(28 46 13 31-0724)*		
28 46 13 31-0767	EA	40 Watts Zone Amplifier Card (Siemens ZAC-40)	1,832.01	28.20
28 46 13 31-0768	EA	180 Watts Zone Amplifier Module (Siemens ZAM-180)	4,072.60	28.20
28 46 13 31-0769	EA	Live Voice Module (Siemens LVM) Note: Includes a dynamic microphone with a push-to-talk switch and ready-to-page indicator light, as well as a small local speaker and volume control for monitoring audio signals.	1,709.25	28.20
28 46 13 31-0770		**MXL Series Equipment** *(28 46 13 31-0699)*		
28 46 13 31-0771		**MXL Optional Equipment** *(28 46 13 31-0770)*		
28 46 13 31-0772	EA	Two Circuit Analog Loop Driver (Siemens ALD-2I)	1,962.81	56.40
28 46 13 31-0773	EA	CXL/MXL Interface Module (Siemens CMI-300)	5,115.40	28.20
28 46 13 31-0774	EA	Four Relay Programmable Relay Module (Siemens CRM-4)	869.81	28.20
28 46 13 31-0775	EA	Two Circuit Controllable Signal/Releasing Module (Siemens CSM-4)	1,052.08	28.20
28 46 13 31-0776	EA	Remote Conventional Zone Module (Siemens CZM-1B6)	389.95	28.20
28 46 13 31-0777	EA	Short Circuit Line Isolator Module (Siemens Model LIM-1)	237.43	28.20
28 46 13 31-0778	EA	Four Circuit Conventional Zone Module (Siemens CZM-4)	1,023.56	28.20
28 46 13 31-0779	EA	12" x 16" x 3" Enclosure For PAD-3 (Siemens EN-PAD)	357.39	42.30
28 46 13 31-0780	EA	Lexan Window For RCC (Siemens GENBOX-WD)	244.75	22.56
28 46 13 31-0781	EA	Input Driver Module (Siemens MID-16)	667.70	28.20
28 46 13 31-0782	EA	Programmable Output Driver Module (Siemens MOD-16)	667.70	28.20
28 46 13 31-0783	EA	MXL Output/Input Module (Siemens MOI-7)	1,074.40	28.20
28 46 13 31-0784	EA	Two Slot Network Option Module Card Cage (Siemens MOM-2)	567.26	28.20
28 46 13 31-0785	EA	Four Slot Network Option Module Card Cage (Siemens MOM-4)	898.33	28.20
28 46 13 31-0786	EA	12 Amperes, 220 Volt AC, Power Supply For MXL (Siemens MPS-12/220)	2,203.96	84.60
28 46 13 31-0787	EA	12 Amperes, 240 Volt AC, Power Supply For MXL (Siemens MPS-12/240)	2,203.96	84.60
28 46 13 31-0788	EA	Network Interface Module (Siemens NIM-1W)	1,607.58	28.20
28 46 13 31-0789	EA	U.L. Listed Parallel Printer (Siemens PAL-1)	4,193.44	112.80
28 46 13 31-0790	EA	Peripheral Interface Module, Model PIM-1 (Siemens 500-691324)	464.34	28.20
28 46 13 31-0791	EA	Surface Mounted Remote Command Center (Siemens RCC-1)	4,432.47	564.00
28 46 13 31-0792	EA	Enclosure And Door With Lens For RCC-1 (Siemens RCC-1DL)	550.50	56.40
28 46 13 31-0793	EA	Flush Mounted Remote Command Center (Siemens RCC-1F)	4,432.47	564.00
28 46 13 31-0794	EA	Enclosure And Door With Lens For RCC-1F (Siemens RCC-1FDL)	565.38	56.40
28 46 13 31-0795	EA	Remote Control Center With System Control Functions And Sequential Event Display (Siemens RCC-2)	3,359.91	564.00
28 46 13 31-0796	EA	MXL/MXLV Remote Annunciator/Keyboard With Enhanced Display (Siemens RCC-3)	5,131.80	564.00
28 46 13 31-0797	EA	RCC-2/RSE-1 Trim Ring (Siemens RCF-1)	84.00	14.10
28 46 13 31-0798	EA	Remote Diagnostics Module For MXL (Siemens RDM-MXL)	6,560.54	56.40
28 46 13 31-0799	EA	Remote Diagnostics Module For PC (Siemens RDM-PC)	13,996.52	56.40
28 46 13 31-0800	EA	Releasing End Of Line Module (Siemens REL-EOL)	191.55	28.20
28 46 13 31-0801	EA	36 Zone Tabular Graphic Annunciator With Restart System Key (Siemens RSA-MBSC)	4,176.12	56.40
28 46 13 31-0802	EA	36 Zone Tabular Graphic Annunciator (Siemens RSA-MBTL)	3,986.40	56.40
28 46 13 31-0803	EA	8-3/8" x 6-1/4" Remote Control Enclosure (Siemens RSE-1)	2,086.76	112.80

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-0804		**Complete MXL And MXLV System Packages Without Enclosure** *(28 46 13 31-0770)*		
28 46 13 31-0805	EA	MXL System Electronics Package Including One MMB-3, One Display/Control Keyboard, One MDL-1, One MKB-2, One Mps-6, One MOM-2, One ALD-2I And One PIM-1 (Siemens MXL-SS-EP) Note: MMB-3 is a MXL/MXLV main control board. MDL-1 is a clear lens. MKB-2 is a MXL/MXLV display/keyboard module with hinged frame. MPS-6 is a 6 Amp power supply for MXL. MOM-2 is a two slot network option module card cage. ALD-2I is a two circuit analog loop driver. PIM-1 is a peripheral interface module.	14,963.02	564.00
28 46 13 31-0806	EA	MXL Voice System Electronics Package Including One MMB-3, One MKB-2, One MPS-6, One ACM-1, One TBM-2, One MMM-1, One OMM-2, One ZAC-30, One OCC-1, One MHD-5, One VSM-1 And Four VSB-1 (Siemens MXLV-SS-EP) Note: MMB-3 is a MXL/MXLV main control board. MKB-2 is a MXL/MXLV display/keyboard module with hinged frame. MPS-6 is a 6 Amp power supply for MXL. ACM-1 is an audio control module. TBM-2 is a voice terminal module. MMM-1 is a master microphone module. OMM-2 is a two half width slot card cage. ZAC-30 is a MXLV zone amplifier card. OCC-1 is a MXLV output control card. MHD-5 is a deadfront panel for MSE-2 backbox. VSM-1 is an eight switch module. VSB-1 is a module blank with overlay.	19,610.35	564.00
28 46 13 31-0807	EA	MXLV Demonstration Panel (Siemens MXLV DEMO)	41,314.43	564.00
28 46 13 31-0808		**MXL Basic System** *(28 46 13 31-0770)*		
28 46 13 31-0809	EA	MXL/MXLV Main Control Board (Siemens MMB-3)	9,115.41	564.00
28 46 13 31-0810	EA	MXL System Electronics Package Including One MMB-3, One DE-2 And One DPU (Siemens MMB-DPU-ENCL) Note: MMB-3 is a MXL/MXLV main control board. DE-2 is an enclosure for document storage. DPU is a handheld device programming and testing unit.	11,891.66	564.00
28 46 13 31-0811	EA	MXL/MXLV Display/Keyboard Module With Hinged Frame (Siemens MKB-2)	3,518.94	56.40
28 46 13 31-0812	EA	MXL/MXLV Keyboard With Enhanced Display With Hinged Frame (Siemens MKB-5)	4,414.19	56.40
28 46 13 31-0813	EA	6 Amperes Power Supply For MXL (Siemens MPS-6)	1,508.35	84.60
28 46 13 31-0814	EA	220/240 Volt AC Adapter Cable (Siemens CIA-12)	108.80	14.10
28 46 13 31-0815		**MXL/MXLR System Expansion Accessories** *(28 46 13 31-0770)*		
28 46 13 31-0816	EA	MXL Remote Power Supply Module (Siemens PSR-1)	1,859.25	84.60
28 46 13 31-0817	EA	Style 4 Communication Module (Siemens NET-4)	377.55	28.20
28 46 13 31-0818	EA	Style 7 Communication Module (Siemens NET-7)	696.21	28.20
28 46 13 31-0819	EA	MXL/MXL-IQ/MXLV Intelligent Control Point, B6 Chip (Siemens ICP-B6)	413.51	28.20
28 46 13 31-0820		**Peripheral Devices** *(28 46 13 31-0699)*		
28 46 13 31-0821		**Thermal Detectors** *(28 46 13 31-0820)*		
28 46 13 31-0822	EA	Rate Of Rise And 135 Degree F Fixed Temperature Thermal Detector (Siemens DT-135R)	145.36	42.30
28 46 13 31-0823	EA	Rate Of Rise And 200 Degree F Fixed Temperature Thermal Detector (Siemens DT-200R)	145.36	42.30
28 46 13 31-0824	EA	135 Degree F Fixed Temperature Thermal Detector (Siemens DT-135F)	145.36	42.30
28 46 13 31-0825	EA	200 Degree F Fixed Temperature Thermal Detector (Siemens DT-200F)	145.36	42.30
28 46 13 31-0826	EA	Weatherproof 135 Degree F Rate Compensation/Fixed Temperature Thermal Detector (Siemens DT-135WP)	238.35	42.30
28 46 13 31-0827	EA	Weatherproof 200 Degree F Rate Compensation/Fixed Temperature Thermal Detector (Siemens DT-200WP)	238.35	42.30
28 46 13 31-0828	EA	Explosion Proof 190 Degree F Rate Compensation/Fixed Temperature Thermal Detector (Siemens DT-190EP)	614.06	42.30
28 46 13 31-0829		**Beam Smoke Detector** *(28 46 13 31-0820)*		
28 46 13 31-0830	EA	Linear Beam Smoke Detector (Siemens PBA-1191)	2,957.61	42.30
28 46 13 31-0831	EA	Base For Linear Beam Smoke Detector (Siemens PBB-1191)	335.71	14.10
28 46 13 31-0832	EA	20cm x 20cm Flat Reflector For Linear Beam Smoke Detector (Siemens PBR-1192)	339.43	14.10
28 46 13 31-0833	EA	10cm x 10cm Flat Reflector For Linear Beam Smoke Detector (Siemens PBR-1193)	170.79	14.10
28 46 13 31-0834		**Bases For Detectors** *(28 46 13 31-0820)*		
28 46 13 31-0835	EA	Detector Base (Siemens DB-11)	46.80	14.10
28 46 13 31-0836	EA	Universal Base (Siemens DB-3S)	43.08	14.10
28 46 13 31-0837		**Manual Stations** *(28 46 13 31-0820)*		
28 46 13 31-0838	EA	Weatherproof Metal Manual Pull Station With Key (Siemens MSM-K-WP)	364.03	33.84
28 46 13 31-0839		**Addressable Devices** *(28 46 13 31-0699)*		
28 46 13 31-0840		**Intelligent Detectors And Devices For Firefinder XLS And FS-250** *(28 46 13 31-0839)*		
28 46 13 31-0841	EA	Addressable Fireprint Fire Detector (Siemens HFP-11)	297.87	42.30
28 46 13 31-0842	EA	Addressable Thermal Fire Detector (Siemens HFPT-11)	254.47	42.30
28 46 13 31-0843	EA	Relay Base For H-Series Intelligent Detectors (Siemens DB-HR)	203.64	42.30
28 46 13 31-0844	EA	Ceiling Mounted Remote Alarm Indicator (Siemens RL-HC)	130.48	42.30
28 46 13 31-0845	EA	Wall Mounted Remote Alarm Indicator (Siemens RL-HW)	130.48	42.30
28 46 13 31-0846	EA	Addressable Single Action Manual Pull Station (Siemens HMS-S)	318.03	28.20
28 46 13 31-0847	EA	Addressable Double Action Manual Pull Station (Siemens HMS-D)	303.15	28.20
28 46 13 31-0848	EA	Single Input Intelligent Initiating Devices Interface Module (Siemens HTRI-S)	237.43	28.20
28 46 13 31-0849	EA	Dual Input Intelligent Initiating Devices Interface Module (Siemens HTRI-D)	293.23	28.20
28 46 13 31-0850	EA	Single Input Intelligent Initiating Devices Interface Module With Relay (Siemens HTRI-R)	293.23	28.20
28 46 13 31-0851	EA	Mini Single Input Intelligent Initiating Devices Interface Module (Siemens HTRI-M)	218.83	28.20
28 46 13 31-0852	EA	Line Isolator Module (Siemens HLIM)	226.27	28.20

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-0853	EA	Remote Convention Zone Module (Siemens HZM)	340.35	28.20
28 46 13 31-0854	EA	Intelligent Control Point Module (Siemens HCP)	434.58	28.20
28 46 13 31-0855	EA	Handheld Programming And Testing Unit (Siemens DPU)	1,962.52	
28 46 13 31-0856	EA	DPU Carrying Case (Siemens DPU-C1)	299.63	
28 46 13 31-0857	EA	Label Printer And Carrying Case (Siemens DPU-PRT)	3,359.63	28.20
28 46 13 31-0858		**Air Duct Housings And Detectors** *(28 46 13 31-0839)*		
28 46 13 31-0859	EA	Air-Duct Housing (Siemens AD2-P)	351.39	22.56
28 46 13 31-0860	EA	Air-Duct Housing With Relay (Siemens AD2-XHR)	398.51	22.56
28 46 13 31-0861	EA	Weatherproof Enclosure For Duct Housing (Siemens WP-2000)	315.55	28.20
28 46 13 31-0862	EA	6" To 1' Duct Sampling Tube (Siemens ST-10)	41.72	8.46
28 46 13 31-0863	EA	>1' To 3' Duct Sampling Tube (Siemens ST-25)	51.08	11.28
28 46 13 31-0864	EA	>3' To 5' Duct Sampling Tube (Siemens ST-50)	64.16	14.10
28 46 13 31-0865	EA	>5' To 10' Duct Sampling Tube (Siemens ST-100)	74.76	16.92
28 46 13 31-0866		**Intelligent Initiating Devices For MXL, MXL-LQ And MXLV** *(28 46 13 31-0839)*		
28 46 13 31-0867	EA	Addressable Fireprint Fire Detector (Siemens FP-11)	311.51	42.30
28 46 13 31-0868	EA	Addressable Thermal Fire Detector (Siemens FPT-11)	265.63	42.30
28 46 13 31-0869	EA	Intelligent Ionization Smoke Detector (Siemens ILI-1)	346.23	42.30
28 46 13 31-0870	EA	Addressable Single Action Manual Pull Station (Siemens MSI-10B)	309.35	28.20
28 46 13 31-0871	EA	Addressable Double Action Manual Pull Station (Siemens MSI-20B)	342.83	28.20
28 46 13 31-0872	EA	Single Input Intelligent Initiating Devices Interface Module (Siemens TRI-S)	313.07	28.20
28 46 13 31-0873	EA	Dual Input Intelligent Initiating Devices Interface Module (Siemens TRI-D)	347.79	28.20
28 46 13 31-0874	EA	Single Input Intelligent Initiating Devices Interface Module With Relay (Siemens TRI-R)	347.79	28.20
28 46 13 31-0875		**Detector Universal Bases** *(28 46 13 31-0839)*		
28 46 13 31-0876	EA	Detector Base With Relay (Siemens DB-X11RS)	146.00	14.10
28 46 13 31-0877	EA	PE-11 To DB-3 Base Adapter (Siemens DB-ADPT)	71.60	14.10
28 46 13 31-0878	EA	Locking Kit (Siemens LK-11)	12.27	
28 46 13 31-0879	EA	Detector Base With Relay (Siemens DB-X3RS)	146.00	14.10
28 46 13 31-0880	EA	Audible Base For Addressable Fireprint Fire Detector (Siemens ADBX-11)	170.79	14.10
28 46 13 31-0881	EA	Retrofit Adapter Box For Audible Bases Ionization Detector Air Duct (Siemens ADB-BOX)	67.88	14.10
28 46 13 31-0882	EA	Flush Trim Ring For Bases (Siemens RA-ADB)	31.80	8.46
28 46 13 31-0883	EA	Seal For DB-11 (Siemens DB11-SEAL)	15.26	
28 46 13 31-0884	EA	Gasket For DB-11 (Siemens DB-SEAL)	16.89	
28 46 13 31-0885	EA	Detector Guard Housing (Siemens DGH-11)	216.67	14.10
28 46 13 31-0886	EA	Small Detector Base (Siemens DB-11E)	51.76	14.10
28 46 13 31-0887	EA	Audible Base For Series 3 (Siemens ADBI-60A)	193.11	14.10
28 46 13 31-0888	EA	Base Plug (Siemens DB-11-DP)	12.22	
28 46 13 31-0889		**Air Duct Smoke Detectors** *(28 46 13 31-0839)*		
28 46 13 31-0890	EA	Intelligent Remote Duct Relay Module (Siemens DA-X3SR)	156.84	28.20
28 46 13 31-0891	EA	Weatherproof Enclosure For Duct Housing (Siemens EAD-3)	858.65	28.20
28 46 13 31-0892		**Notification Devices** *(28 46 13 31-0699)*		
28 46 13 31-0893		**Synchronization Control Devices** *(28 46 13 31-0892)*		
28 46 13 31-0894	EA	Dual Synchronization Control Module (Siemens DSC)	237.43	28.20
28 46 13 31-0895		**Stand-Alone Strobes** *(28 46 13 31-0892)*		
28 46 13 31-0896	EA	Wall Mounted Multi-Candela Strobe (Siemens ZR-MC-R)	190.00	42.30
28 46 13 31-0897	EA	Wall Mounted High, Multi-Candela Strobe (Siemens ZR-HMC-R)	208.60	42.30
28 46 13 31-0898	EA	Ceiling Mounted Multi-Candela Strobe (Siemens ZR-MC-CR)	190.00	42.30
28 46 13 31-0899	EA	Ceiling Mounted High, Multi-Candela Strobe (Siemens ZR-HMC-CR)	208.60	42.30
28 46 13 31-0900	EA	Ceiling Mounted High Multi-Candela Strobe (Siemens ST-HMC-CW)	208.60	42.30
28 46 13 31-0901	EA	Ceiling Mounted Multi-Candela Strobe (Siemens ST-MC-CW)	190.00	42.30
28 46 13 31-0902	EA	Retrofit Plate Multi-Candela Strobe (Siemens ST-MC-RETRO-R)	222.23	42.30
28 46 13 31-0903	EA	Weatherproof Ceiling Mounted Strobe (Siemens ST-75-CR-WP)	212.31	42.30
28 46 13 31-0904	EA	Weatherproof Wall Mounted Strobe (Siemens ST-75-R-WP)	212.31	42.30
28 46 13 31-0905	EA	Weatherproof Ceiling Mounted High Multi-Candela Strobe (Siemens ST-HMC-CR-WP)	228.43	42.30
28 46 13 31-0906	EA	Weatherproof Wall Mounted High Multi-Candela Strobe (Siemens ST-HMC-R-WP)	228.43	42.30
28 46 13 31-0907		**Horns And Strobes** *(28 46 13 31-0892)*		
28 46 13 31-0908	EA	Wall Mounted Multi-Candela Horn/Strobe (Siemens SE-MC-R)	263.15	42.30
28 46 13 31-0909	EA	Wall Mounted High Multi-Candela Horn/Strobe (Siemens SE-HMC-R)	279.27	42.30
28 46 13 31-0910	EA	Wall Mounted Horn (Siemens SE-R)	145.36	42.30
28 46 13 31-0911	EA	Ceiling Mounted Multi-Candela Horn/Strobe (Siemens SE-MC-CR)	263.15	42.30
28 46 13 31-0912	EA	Ceiling Mounted High Multi-Candela Horn/Strobe (Siemens SE-HMC-CR)	279.27	42.30
28 46 13 31-0913	EA	Ceiling Mounted Horn (Siemens SEC-R)	152.80	42.30
28 46 13 31-0914	EA	Wall Mounted Low Profile Multi-Candela Horn/Strobe (Siemens SEF-MC-R)	263.15	42.30
28 46 13 31-0915	EA	Wall Mounted Low Profile High Multi-Candela Horn/Strobe (Siemens SEF-HMC-R)	279.27	42.30
28 46 13 31-0916	EA	Wall Mounted Low Profile Horn (Siemens SEF-R)	145.36	42.30
28 46 13 31-0917	EA	Ceiling Mounted Low Profile Multi-Candela Horn/Strobe (Siemens SEF-MC-CW)	263.15	42.30

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-0918	EA	Ceiling Mounted Low Profile High Multi-Candela Horn/Strobe (Siemens SEF-HMC-CW)	279.27	42.30
28 46 13 31-0919	EA	Ceiling Mounted Low Profile Horn (Siemens SEF-CR)	152.80	42.30
28 46 13 31-0920	EA	Mini Horn (Siemens MH-R)	118.08	42.30
28 46 13 31-0921	EA	Indoor/Outdoor Multi Tone Horn (Siemens MTH-R)	155.28	42.30
28 46 13 31-0922	EA	Indoor/Outdoor Multi Tone, Multi-Candela Horn/Strobe (Siemens MTH-MC-R)	247.03	42.30
28 46 13 31-0923	EA	Industrial Tri-Tone Horn (Siemens ASR)	735.57	42.30
28 46 13 31-0924	EA	Wall Mounted Horn (Siemens HS-R)	155.28	42.30
28 46 13 31-0925	EA	Wall Mounted Multi-Candela Horn/Strobe (Siemens HS-MC-R)	248.27	42.30
28 46 13 31-0926	EA	Wall Mounted High Multi-Candela Horn/Strobe (Siemens HS-HMC-R)	268.11	42.30
28 46 13 31-0927	EA	6" Motor Bell (Siemens MBDC-6)	180.08	42.30
28 46 13 31-0928	EA	10" Motor Bell (Siemens MBDC-10)	198.68	42.30
28 46 13 31-0929		**Mounting Accessories** *(28 46 13 31-0892)*		
28 46 13 31-0930	EA	Concealed Conduit Adapter Plate (Siemens APS-R)	43.08	14.10
28 46 13 31-0931	EA	4" x 1-1/2" Surface Mounted Back Box (Siemens BBS-R)	43.08	14.10
28 46 13 31-0932	EA	4" x 2-1/8" Surface Mounted Back Box (Siemens DBBS-R)	44.32	14.10
28 46 13 31-0933	EA	Red Weatherproof Surface Mount Back Box (Siemens MT-SUR-BOX)	74.08	14.10
28 46 13 31-0934	EA	White Weatherproof Surface Mount Back Box (Siemens MT-SUR-BOX-W)	57.96	14.10
28 46 13 31-0935	EA	Surface Mounted Speaker Back Box (Siemens SBBS-R)	61.68	14.10
28 46 13 31-0936	EA	Surface Mounted Speaker Back Box (Siemens SBL2S-R)	66.64	14.10
28 46 13 31-0937	EA	Square Semi-Flush Extension Ring (Siemens SERS-R)	51.76	14.10
28 46 13 31-0938	EA	Semi-Flush Plate (Siemens SFPS-R)	41.84	14.10
28 46 13 31-0939	EA	Square Surface Back Box (Siemens SHBBS-R)	51.76	14.10
28 46 13 31-0940	EA	Horn Adapter Plate (Siemens SHMPS-R)	49.28	14.10
28 46 13 31-0941	EA	Ceiling Speaker Extension Ring (Siemens SPEXT-R)	43.08	14.10
28 46 13 31-0942	EA	Wall Mounted Surface Mounted Speaker Back Box (Siemens SPSB-R)	57.96	14.10
28 46 13 31-0943	EA	Wall Mounted Surface Mounted Speaker/Strobe Back Box (Siemens SPSSB-R)	61.68	14.10
28 46 13 31-0944	EA	Weatherproof Speaker Back Box (Siemens WBBS-R)	59.20	14.10
28 46 13 31-0945	EA	Weatherproof Speaker Back Box With 3/4" Knockout (Siemens WBBS-R-3/4T-3/4B)	66.64	14.10
28 46 13 31-0946	EA	Weatherproof Flush Plate (Siemens WFPAS-R)	66.64	14.10
28 46 13 31-0947	EA	Weatherproof Horn Flush Plate (Siemens WFPS-R)	66.64	14.10
28 46 13 31-0948	EA	Weatherproof Horn Back Box (Siemens WPBBS-R)	61.68	14.10
28 46 13 31-0949	EA	Weatherproof Strobe Back Box (Siemens WPSBBS-R)	61.68	14.10
28 46 13 31-0950	EA	Surface Mounted Weatherproof Back Box Kit (Siemens WPS-KIT)	43.08	14.10
28 46 13 31-0951	EA	Z Series Back Box (Siemens ZBB-R)	49.28	14.10
28 46 13 31-0952		**Door Holders** *(28 46 13 31-0892)*		
28 46 13 31-0953	EA	120 Volt AC Concealed Wiring Fire Door Holder (Siemens SDH-2A)	404.51	42.30
28 46 13 31-0954	EA	24 Volt DC Concealed Wiring Fire Door Holder (Siemens SDH-2D)	404.51	42.30
28 46 13 31-0955		**Voice Equipment** *(28 46 13 31-0699)*		
28 46 13 31-0956		**Voicecom** *(28 46 13 31-0955)*		
28 46 13 31-0957	EA	Emergency Voice Alarm Communication System, 3.5 Amp Power Supply And Battery Charger, 50W Amplifier, Battery Cables, Main Control Board With One Speaker Circuit, Paging Microphone And Enclosure With Deadfront And Space For Five Modules (Siemens VOICECOM)	6,230.39	564.00
28 46 13 31-0958	EA	Emergency Voice Alarm Communication System, 3.5 Amp Power Supply And Battery Charger, Two 50W Amplifier, Battery Cables, Main Control Board With One Speaker Circuit, Paging Microphone, Enclosure With Deadfront And Space For 11 Modules, Auxiliary Power Supply, Four PS-AUX Strobe Zone Cables And One AM-25-50 Speaker Zone Cables (Siemens VOICECOM-L)	10,012.24	564.00
28 46 13 31-0959		**Johnson Controls Fire Alarm** *(28 46 13 31)*		
28 46 13 31-0960	EA	Intelligent Addressable ION Detector; With FlashScan. (Johnson Controls, Inc. #1951J)	229.13	42.30
28 46 13 31-0961	EA	Intelligent Addressable Photo Detector; With FlashScan. (Johnson Controls, Inc. #2951J)	226.44	42.30
28 46 13 31-0962	EA	Intelligent Addressable Photo/Thermal Detector; With FlashScan. (Johnson Controls, Inc. #2951TJ)	288.00	42.30
28 46 13 31-0963	EA	Acclimate™ Intelligent Photo Thermal Detector; With FlashScan. (Johnson Controls, Inc. #2951TMJ)	287.15	42.30
28 46 13 31-0964	EA	411UD, 4 Channel Dual. (Johnson Controls, Inc. #411UD)	819.51	56.40
28 46 13 31-0965	EA	Intelligent Addressable High Temperature Heat Detector; With FlashScan. (Johnson Controls, Inc. #5951HJ)	215.40	42.30
28 46 13 31-0966	EA	Intelligent Addressable High Temperature Heat Detector; With FlashScan. (Johnson Controls, Inc. #5951J)	189.93	42.30
28 46 13 31-0967	EA	Intelligent Addressable Rate-of-Rise Thermal Detector; With FlashScan. (Johnson Controls, Inc. #5951RJ)	184.53	42.30
28 46 13 31-0968	EA	Intelligent Addressable Laser Detector; Low Profile, Use With IFC Series Panels Only. (Johnson Controls, Inc. #7351J)	599.71	42.30
28 46 13 31-0969	EA	100 Watts Audio Amplifier At 70.7 VRMS With Built-in Tone Generator, 120 Volt AC (Johnson Controls, Inc. #AA-100)	2,977.52	84.60
28 46 13 31-0970	EA	AUDIO Amplifier, 100 Watts, 230 Voltage AC (Johnson Controls, Inc. #AA-100E)	2,883.61	84.60
28 46 13 31-0971	EA	120 Watts Audio Amplifier At 25 VRMS With Built-in Tone Generator, 120 Voltage AC (Johnson Controls, Inc. #AA-120)	2,934.27	84.60
28 46 13 31-0972	EA	AUDIO Amplifier, 120 Watts, 230 Voltage AC (Johnson Controls, Inc. #AA-120E)	2,807.77	84.60
28 46 13 31-0973	EA	30 Watts Audio Amplifier At 25 VRMS, 120 Voltage AC (Johnson Controls, Inc. #AA-30)	1,346.35	84.60
28 46 13 31-0974	EA	AUDIO Amplifier, 30 Watts, 230 Voltage AC (Johnson Controls, Inc. #AA-30E)	1,346.35	84.60
28 46 13 31-0975	EA	Annunciator Control Module With; 16 Red Alarm LED's, 16 Yellow Trouble LED's, And 16 Control Switches, On-line, System Trouble Led, And Local Sounder, Local Acknowledge And Lamp Test Switch, Supports 1, 2 Or 3 AEM-16AT Expander Modules. (Johnson Controls, Inc. #ACM-16AT)	1,375.70	28.20
28 46 13 31-0976	EA	IFC Series ACS Annunciator; Up To 96 Points Of Annunciation With Alarm Or Active LED, Trouble LED And Switch Per Circuit. Active/Alarm LEDs Can Be Programmed (By Powered Up Switch Selection) By Point To Be Red, Green Or Yellow And The Trouble LED Is Always Yellow. Expandable With One, Two Or Three AEM-24AT's. (Johnson Controls, Inc. #ACM-24AT)	1,431.46	28.20

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-0977	EA	Annunciator Control Module; Includes 32 Red Alarm LED's, System Trouble LED And On-line LED, Local Acknowledge, Lamp Test Switch, And Local Piezo Sounder, Supports One AEM-32A Expander Module. (Johnson Controls, Inc. #ACM-32A)	1,047.77	28.20
28 46 13 31-0978	EA	IFC Series ACS Annunciator; Up To 96 Points Of Annunciation With Alarm Or Active LED Per Circuit. Active/Alarm LEDs Can Be Programmed (By Powered Up Switch Selection) In Groups Of 24 To Be Red, Green Or Yellow. Expandable To 96 Points With One AEM-48A. (Johnson Controls, Inc. #ACM-48A)	1,047.77	28.20
28 46 13 31-0979	EA	Annunciator, Relay, Form C. (Johnson Controls, Inc. #ACM-8R)	735.02	28.20
28 46 13 31-0980	EA	Charger Power Supply - 6 Or 10 Amperes; Mounts In CAB-PS1, CAB-3/4, EQ Cabx, BB-25, Or CHS-PS1; Comes With The PK-PPS Programming Utility. Windows® PC And USB Cable Required For Programming. (Johnson Controls, Inc. #ACPS-610)	2,387.43	56.40
28 46 13 31-0981	EA	Annunciator Expander Module With: 16 Red Alarm LED's, 16 Yellow Trouble LED's, 16 Control Switches, Cable For Connection To The ACM-16AT Master. (Johnson Controls, Inc. #AEM-16AT)	1,047.77	28.20
28 46 13 31-0982	EA	Annunciator Expander Module; 24 Alarm And Trouble LEDs, Expands The ACM-24AT To 48, 72 Or 96 Points. (Johnson Controls, Inc. #AEM-24AT)	1,089.68	28.20
28 46 13 31-0983	EA	Annunciator Expander Module With: 32 Red Alarm LED's, Cable For Connection To The ACM-32A Master. (Johnson Controls, Inc. #AEM-32A)	937.80	28.20
28 46 13 31-0984	EA	Annunciator Expander Module; 48 Alarm LEDs, Expands The ACM-48A To 96 Points. (Johnson Controls, Inc. #AEM-48A)	937.80	28.20
28 46 13 31-0985	EA	Back Box, Flush Or Surface Mount; Requires A Door And Telephone Chassis. (Johnson Controls, Inc. #AFAWS-BX)	147.43	25.38
28 46 13 31-0986	EA	Receiver, Multimode Fiber. (Johnson Controls, Inc. #AFL-RM)	1,428.32	56.40
28 46 13 31-0987	EA	Receiver, Singlemode Fiber. (Johnson Controls, Inc. #AFL-RS)	3,145.64	56.40
28 46 13 31-0988	EA	Transmit, Multimode Fiber. (Johnson Controls, Inc. #AFL-TM)	1,428.32	56.40
28 46 13 31-0989	EA	Transmit, Singlemode Fiber. (Johnson Controls, Inc. #AFL-TS)	3,145.64	56.40
28 46 13 31-0990	EA	Base, Smoke Detector, 2 Wire. (Johnson Controls, Inc. #B110LP)	50.94	14.10
28 46 13 31-0991	EA	Base, Smoke Detector, Intelligent. (Johnson Controls, Inc. #B224BI)	148.78	14.10
28 46 13 31-0992	EA	Base, Smoke Detector, Intelligent. (Johnson Controls, Inc. #B224RB)	139.93	14.10
28 46 13 31-0993	EA	Base, Smoke Detector, 2 Wire. (Johnson Controls, Inc. #B401)	54.72	14.10
28 46 13 31-0994	EA	Intelligent Detector Base, Without Flange. (Johnson Controls, Inc. #B501J)	48.44	14.10
28 46 13 31-0995	EA	Battery Cabinet, Lockable. (Johnson Controls, Inc. #BB-100)	1,034.12	56.40
28 46 13 31-0996	EA	Projected Beam Smoke Detector, Single-ended Reflected Type, Includes Trouble Relay, Transmitter/Receiver In One Unit. (Johnson Controls, Inc. #Beam1224)	2,443.83	84.60
28 46 13 31-0997	EA	Same As Beam1224 With Built-in Sensitivity Test Filter. (Johnson Controls, Inc. #Beam1224S)	2,586.01	84.60
28 46 13 31-0998	EA	Mounting Kit, Long RG, Beam. (Johnson Controls, Inc. #BeamLRK)	284.10	14.10
28 46 13 31-0999	EA	Mounting Kit, Beam Detect. (Johnson Controls, Inc. #BeamMMK)	189.33	14.10
28 46 13 31-1000	EA	Digital Audio Amplifier, 50 Watts, 25 VRMS (Johnson Controls, Inc. #DAA-5025)	2,445.93	84.60
28 46 13 31-1001	EA	Digital Audio Amplifier, 50 Watts, 25 VRMS, Multi-Fiber (Johnson Controls, Inc. #DAA-5025F)	2,254.27	84.60
28 46 13 31-1002	EA	Digital Audio Amplifier, 50 Watts, 25 VRMS, Single-Fiber (Johnson Controls, Inc. #DAA-5025SF)	2,254.27	84.60
28 46 13 31-1003	EA	Digital Audio Amplifier, 50 Watts, 70 VRMS (Johnson Controls, Inc. #DAA-5070)	2,652.94	84.60
28 46 13 31-1004	EA	Amplifier, Digital Audio. (Johnson Controls, Inc. #DAA-5070E)	2,443.83	84.60
28 46 13 31-1005	EA	Digital Audio Amplifier, 50 Watts, 70 VRMS, Multi-Fiber (Johnson Controls, Inc. #DAA-5070F)	2,443.83	84.60
28 46 13 31-1006	EA	Digital Audio Amplifier, 50 Watts, 70 VRMS, Single-Fiber (Johnson Controls, Inc. #DAA-5070SF)	2,443.83	84.60
28 46 13 31-1007	EA	Digital Audio Amplifier, 75 Watts, 25 VRMS (Johnson Controls, Inc. #DAA-7525)	2,931.25	84.60
28 46 13 31-1008	EA	Digital Audio Amplifier, 75 Watts, 25 VRMS, Multi Fiber (Johnson Controls, Inc. #DAA-7525F)	2,931.25	84.60
28 46 13 31-1009	EA	Digital Audio Amplifier, 75 Watts, 25 VRMS, Single Fiber (Johnson Controls, Inc. #DAA-7525SF)	2,931.25	84.60
28 46 13 31-1010	EA	Innovairflex Intelligent. (Johnson Controls, Inc. #DNR)	295.36	28.20
28 46 13 31-1011	EA	Innovairflex Duct Detect. (Johnson Controls, Inc. #DNRW)	461.11	28.20
28 46 13 31-1012	EA	Innovairflex Sample Tube. (Johnson Controls, Inc. #DST1)	37.66	11.28
28 46 13 31-1013	EA	Innovairflex Sample Tube. (Johnson Controls, Inc. #DST1.5)	41.57	11.28
28 46 13 31-1014	EA	Innovairflex Sample Tube. (Johnson Controls, Inc. #DST10)	106.75	16.92
28 46 13 31-1015	EA	Innovairflex Sample Tube. (Johnson Controls, Inc. #DST3)	50.30	11.28
28 46 13 31-1016	EA	Innovairflex Sample Tube. (Johnson Controls, Inc. #DST5)	62.03	14.10
28 46 13 31-1017	EA	Digital Voice Command, Analog Output. (Johnson Controls, Inc. #DVC-AO)	463.92	28.20
28 46 13 31-1018	EA	Digital Voice Command, Keypad. (Johnson Controls, Inc. #DVC-KD)	766.78	56.40
28 46 13 31-1019	EA	Equipment Cabinet Used To House DAA Digital Amplifiers, XP10/6 Series Transponders, AA-Amplifiers, ACPS-610 Or Amperes-24; B Size, Black. (Johnson Controls, Inc. #EQBB-B4)	618.75	84.60
28 46 13 31-1020	EA	Equipment Cabinet Used To House DAA Digital Amplifiers, XP10/6 Series Transponders, AA-Amplifiers, ACPS-610 Or Amperes-24; C Size, Black. (Johnson Controls, Inc. #EQBB-C4)	874.01	84.60
28 46 13 31-1021	EA	Equipment Cabinet Used To House DAA Digital Amplifiers, XP10/6 Series Transponders, AA-Amplifiers, ACPS-610 Or AMPS-24; D Size, Black. (Johnson Controls, Inc. #EQBB-D4)	959.31	84.60
28 46 13 31-1022	EA	Equipment Cabinet Door; B Size Black. (Johnson Controls, Inc. #EQDR-B4)	523.54	11.28
28 46 13 31-1023	EA	Equipment Cabinet Door; C Size Black. (Johnson Controls, Inc. #EQDR-C4)	792.12	11.28
28 46 13 31-1024	EA	Equipment Cabinet Door; D Size Black. (Johnson Controls, Inc. #EQDR-D4)	871.11	11.28
28 46 13 31-1025	EA	6.0 Amperes, 120 Volt AC Remote Charger Power Supply (Johnson Controls, Inc. #FCPS-24S6) Note: Includes Main Printed Circuit Board, Transformers And Installation Instructions	1,004.84	112.80
28 46 13 31-1026	EA	8 Amperes, 120 Volt AC Remote Charger Power Supply (Johnson Controls, Inc. #FCPS-24S8) Note: Includes Main Printed Circuit Board, Transformers And Installation Instructions	1,335.74	112.80
28 46 13 31-1027	EA	80 Character Display Annunciator. "Security Keypad" Mechanical Design. For Use With The IFC-320, JCPU2-640, JCPU-640 And IFC-400/300 (Rev 3.62+) Only. (Johnson Controls, Inc. #FDU-80G)	1,278.10	84.60
28 46 13 31-1028	EA	Fireman's Telephone Hand Set. (Johnson Controls, Inc. #FHS)	236.72	14.10
28 46 13 31-1029	EA	Fire Phone Storage Cabinet, Recessed, Holds 6 Phones. (Johnson Controls, Inc. #FHSC-R)	676.24	28.20
28 46 13 31-1030	EA	Door Holder, Magnetic, Floor. (Johnson Controls, Inc. #FM980)	344.12	42.30
28 46 13 31-1031	EA	Door Holder, Magnetic, Wall. (Johnson Controls, Inc. #FM996)	276.89	42.30
28 46 13 31-1032	EA	Door Holder, Magnetic, Wall. (Johnson Controls, Inc. #FM998)	292.19	42.30
28 46 13 31-1033	EA	Addressable Beam Detector. (Johnson Controls, Inc. #FSB-200)	2,504.34	56.40
28 46 13 31-1034	EA	Addressable Beam Detector With Remote Test Feature. (Johnson Controls, Inc. #FSB-200S)	3,065.34	56.40
28 46 13 31-1035	EA	Intelligent Addressable HARSH (Hostile Area Smoke Head) Detector; Photo, Requires B501B-FTXJ Base. (Johnson Controls, Inc. #FTX-P2J)	920.63	28.20
28 46 13 31-1036	EA	IFC-320 Intelligent Fire Alarm Panel; Single Printed Circuit Board With One SLC Loop (318 Devices), Back-lit, 80 Character Display, System And Programming Keypad And 6.0 Amperes Power Supply, 120 Volt AC, (Johnson Controls, Inc. #IFC-320) Note: Includes Door, Dress Panel And Back Box, Black	6,138.43	451.20
28 46 13 31-1037	EA	Upgrade Kit, ORG BLD, 640. (Johnson Controls, Inc. #IFC-640UG)	3,092.57	56.40

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-1038	EA	Workstation Only Workstation GUI Software And Hardware Package. (Johnson Controls, Inc. #IFI)	40,617.79	676.80
28 46 13 31-1039	EA	Workstation With NFN Fiber PC Card Workstation GUI Software And Hardware Package. Includes NFN Gateway (JNFN-GW-PC-F) Fiber Version. (Johnson Controls, Inc. #IFI-F)	44,408.84	676.80
28 46 13 31-1040	EA	Workstation With Echelon Wire PC Card Workstation GUI Software And Hardware Package For Building Systems Integration, WSSUP Workstation Supervisor. Includes Echelon® Gateway (ECH-GW-PC-W) Wire Version. (Johnson Controls, Inc. #IFI-IP)	50,095.43	676.80
28 46 13 31-1041	EA	Workstation With NFN Wire PC Card Workstation GUI Software And Hardware Package. Includes NFN Gateway (JNFN-GW-PC-W) Wire Version. (Johnson Controls, Inc. #IFI-W)	44,408.84	676.80
28 46 13 31-1042	EA	Annunciator Flush Box. Mounts One Annunciator Module. (Johnson Controls, Inc. #JABF-1B)	295.43	16.92
28 46 13 31-1043	EA	Annunciator Flush Box. One Module. Attractive Glass Door And Key Lock. (Johnson Controls, Inc. #JABF-1DB)	333.34	16.92
28 46 13 31-1044	EA	Annunciator Flush Box. Mounts Two Annunciator Modules. (Johnson Controls, Inc. #JABF-2B)	363.67	16.92
28 46 13 31-1045	EA	Annunciator Flush Box. Mounts Four Annunciator Modules. (Johnson Controls, Inc. #JABF-4B)	685.91	16.92
28 46 13 31-1046	EA	Annunciator Surface Box. Deep With Trim Cover. (Johnson Controls, Inc. #JABS-1TB)	219.68	11.28
28 46 13 31-1047	EA	Surface (or Semi-flush) Mount Back Box (Johnson Controls, Inc. #JABS-2D) Note: Used With The INA, ACS Annunciators, SCS Series, JNCA And JNCA-2 Black.	339.51	25.38
28 46 13 31-1048	EA	Surface (or Semi-flush) Mount Back Box (Johnson Controls, Inc. #JABS-2DR) Note: Used With The INA, ACS Annunciators, SCS Series, JNCA And JNCA-2 Red.	361.25	25.38
28 46 13 31-1049	EA	Surface (or Semi-flush) Mount INA, ACS, Or SCS Back Box, Black. (Johnson Controls, Inc. #JABS-4D)	672.48	25.38
28 46 13 31-1050	EA	Audio Command Door For CAB-B4, Black; Required When Using CA-2. (Johnson Controls, Inc. #JADDR-B4)	676.54	11.28
28 46 13 31-1051	EA	Audio Command Door For CAB-C4, Black; Required When Using CA-2. (Johnson Controls, Inc. #JADDR-C4)	913.48	11.28
28 46 13 31-1052	EA	Audio Command Door For CAB-D4, Black; Required When Using CA-2. (Johnson Controls, Inc. #JADDR-D4)	1,131.46	11.28
28 46 13 31-1053	EA	Addressable Pull Station; With FlashScan. (Johnson Controls, Inc. #JBG-12LX)	307.88	28.20
28 46 13 31-1054	EA	Battery Dress Panel For CAB-4 Series; For Use With The JCPU2-3030, JCPU2-640, JNCA-2, And DVC Systems. (Johnson Controls, Inc. #JBP2-4)	144.47	11.28
28 46 13 31-1055	EA	JCPU2-3030 CPU With 640-character Display; Required For Single Panel (One CPU2-3030) Systems. Includes: CPU, 640-Character Backlit LCD Display, QWERTY Programming And Control Keypad, Installation, Programming And Operating Manuals. Supports One To 10 Signaling Line Circuits (Up To Five LCM-320 And Five LEM-320). Order One Per System Or As Necessary (Up To 103 Network Nodes) For A Networked System. Requires Top Row Of A Cabinet. (Johnson Controls, Inc. #JCPU2-3030D)	6,124.08	451.20
28 46 13 31-1056	EA	Central Processing Unit For The JCPU2-640 With Integral 120 Volt AC Power Supply (Johnson Controls, Inc. #JCPU2-640) Note: Includes CHS2-M2 Chassis	4,415.93	338.40
28 46 13 31-1057	EA	Main Board, CPU, IFC3030, DI. (Johnson Controls, Inc. #JCPU-3030D)	8,005.97	451.20
28 46 13 31-1058	EA	Main Board, CPU, IFC640. (Johnson Controls, Inc. #JCPU-640)	7,728.31	338.40
28 46 13 31-1059	EA	Main Board, CPU, IFC640, EUR. (Johnson Controls, Inc. #JCPU-640E)	5,529.90	338.40
28 46 13 31-1060	EA	Digital Voice Command, Extended Memory. (Johnson Controls, Inc. #JDVC-EM)	3,085.81	42.30
28 46 13 31-1061	EA	Digital Voice Command, Extended Memory, Multi-Fiber. (Johnson Controls, Inc. #JDVC-EMF)	3,117.44	42.30
28 46 13 31-1062	EA	Digital Voice Command, Extended Memory, Single-Fiber. (Johnson Controls, Inc. #JDVC-EMSF)	3,117.44	42.30
28 46 13 31-1063	EA	Annunciator, Network Control. (Johnson Controls, Inc. #JNCA)	3,686.84	56.40
28 46 13 31-1064	EA	Network Control Annunciator-2, 640-characters; On Single Panel (one JCPU2-640) JCPU2-640 Systems, The JNCA-2 Can Be The Primary Display For The Panel And Connects Directly To The JCPU2-640. On Network Systems (Two Or More JCPU2-640's), One Network Display (Either JNCA-2 Or IFW) Is Required For Every System And Each JNCA-2 Connects To And Requires An NCM Network Control Module. Mounts In A Row Of FACP Node Or In Two Annunciator Module Positions. (Johnson Controls, Inc. #JNCA-2) Note: Mounting Includes: NCA/640-2-Kit (directly Mounting To The CHS2-M2), CA-2, ADP-4B, Or In An Annunciator Box, Such As The ABS-2DB (requires The CHS-2D).	3,121.00	56.40
28 46 13 31-1065	EA	Mass Notification Voice Paging; Requires JNOTIFY-PAA Hardware Package (Sold Separately). (Johnson Controls, Inc. #JNOTIFY-IP)	2,572.34	338.40
28 46 13 31-1066	EA	160 Character Display Annunciator; For Use With JCPU-3030 And JCPU2-3030. (Johnson Controls, Inc. #LCD-160)	2,210.43	56.40
28 46 13 31-1067	EA	80 Character LCD Annunciator. Mounts In ABS-1T, ABF-1D, ABF-2D, Or Flush Back Box. (Johnson Controls, Inc. #LCD-80)	1,814.19	56.40
28 46 13 31-1068	EA	Loop Control Module. Each LCM May Be Expanded To Two Loops By Adding A LEM-320. IFC2- 3030 And IFC-3030 Only. (Johnson Controls, Inc. #LCM-320)	2,934.08	56.40
28 46 13 31-1069	EA	Lamp Driver Annunciator Control Module. For Use With Custom Graphic Annunciators. 32 Points. (Johnson Controls, Inc. #LDM-32)	909.60	14.10
28 46 13 31-1070	EA	Cable 24": LDM TO Annunciator. (Johnson Controls, Inc. #LDM-CBL24)	289.81	11.28
28 46 13 31-1071	EA	Cable 48": LDM TO Annunciator. (Johnson Controls, Inc. #LDM-CBL48)	358.05	11.28
28 46 13 31-1072	EA	Lamp Driver Annunciator Expander Module. For Use With Custom Graphic Annunciators. 32 Points. (Johnson Controls, Inc. #LDM-E32)	731.46	14.10
28 46 13 31-1073	EA	Relay Module. 32 Form-A Contacts. Connects To LDM-32 Or LDM-E32. (Johnson Controls, Inc. #LDM-R32)	1,347.50	14.10
28 46 13 31-1074	EA	Loop Expander Module. Mounts As Daughter Board To LCM-320 To Provide Even Numbered SLC Loops. (Johnson Controls, Inc. #LEM-320)	2,446.46	14.10
28 46 13 31-1075	EA	Addressable Control Module With FlashScan; Configured For One Class A Or Class B NAC. (Johnson Controls, Inc. #M300CJ)	186.26	14.10
28 46 13 31-1076	EA	Addressable Dual Monitor Module; With FlashScan, Two Class B Circuits. (Johnson Controls, Inc. #M300DJ)	300.37	14.10
28 46 13 31-1077	EA	Addressable Monitor Module; With FlashScan; Supervises Either A Class A Or Class B Circuit Of N.D. Dry-contact Input Devices. (Johnson Controls, Inc. #M300MJ)	144.92	14.10
28 46 13 31-1078	EA	Addressable Relay Module With FlashScan; Provides Two Form-C Dry Contacts That Switch Together. (Johnson Controls, Inc. #M300RJ)	205.79	14.10
28 46 13 31-1079	EA	Addressable Mini Module With FlashScan; Supervises A Class B Circuit Of N.D. Dry-contact Devises. (Johnson Controls, Inc. #M301MJ)	160.91	14.10
28 46 13 31-1080	EA	Addressable 2-Wire Detector Monitor Module; With FlashScan. (Johnson Controls, Inc. #M302MJ)	266.19	14.10
28 46 13 31-1081	EA	Addressable Firephone Control Module With Flashscan. (Johnson Controls, Inc. #M500FPJ)	304.41	14.10
28 46 13 31-1082	EA	SLC Loop Isolator Module; Isolates Against Short Circuits On The SLC. (Johnson Controls, Inc. #M500XJ)	169.04	14.10
28 46 13 31-1083	EA	Network INTFC, P2P, Wire. (Johnson Controls, Inc. #MIB-W)	2,571.53	42.30
28 46 13 31-1084	EA	Network Adapter, Fiber. (Johnson Controls, Inc. #NAM-232F)	2,291.21	28.20
28 46 13 31-1085	EA	Network Adapter, Wire. (Johnson Controls, Inc. #NAM-232W)	2,116.83	28.20
28 46 13 31-1086	EA	Plate, Retrofit, NCA-2. (Johnson Controls, Inc. #NCA-2RETRO)	77.62	5.64
28 46 13 31-1087	EA	Network Control Module - Multi Mode Fiber; Order One NCM Per Network Node (JCPU-640/3030, JNCA, JCPU2-640/3030, JNCA-2, DVC, etc.) (Johnson Controls, Inc. #NCM-F)	1,850.34	28.20
28 46 13 31-1088	EA	Network Control Module - Wire; Order One NCM Per Network Node (JCPU-640/3030, JNCA, JCPU2-640/3030, JNCA-2, DVC, etc.) (Johnson Controls, Inc. #NCM-W)	1,761.38	28.20
28 46 13 31-1089	EA	NFV-25/50. (Johnson Controls, Inc. #NFV-25/50)	4,503.50	56.40

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-1090	EA	NU-RPT101-1U RS485. (Johnson Controls, Inc. #NU-RPT101-1U)	1,245.68	28.20
28 46 13 31-1091	EA	Key Switch, Remote Control. (Johnson Controls, Inc. #RKS-S)	339.09	11.28
28 46 13 31-1092	EA	Microphone Assembly For Mounting To An ADP-4 Dress Panel. (Johnson Controls, Inc. #RM-1)	782.40	28.20
28 46 13 31-1093	EA	Microphone Assembly For Mounting In An CAB-RM Cabinet. (Johnson Controls, Inc. #RM-1SA)	782.40	28.20
28 46 13 31-1094	EA	Remote Page Jack. Allows Remote All-Call Paging. (Johnson Controls, Inc. #RPJ-1)	208.34	11.28
28 46 13 31-1095	EA	SA-WBB, Weatherproof. (Johnson Controls, Inc. #SA-WBB)	54.14	5.64
28 46 13 31-1096	EA	SA-WBBC, Weatherproof. (Johnson Controls, Inc. #SA-WBBC)	54.14	5.64
28 46 13 31-1097	EA	Strobe, Standard, 12/24 Volt DC, Red (Johnson Controls, Inc. #SCR)	198.35	42.30
28 46 13 31-1098	EA	Strobe, HI, 12/24 Volt DC, Red (Johnson Controls, Inc. #SCRH)	224.87	42.30
28 46 13 31-1099	EA	Strobe, HI, Outdoor, Red. (Johnson Controls, Inc. #SCRHK)	266.48	47.94
28 46 13 31-1100	EA	Strobe, Standard, Outdoor, Red. (Johnson Controls, Inc. #SCRK)	262.67	47.94
28 46 13 31-1101	EA	Smoke Control Master; Includes Eight On/off/auto Switches. Supports One SCE-8. Includes Manual, Slide-in Labels. Mounts In ADP-4 Or ABS-4D. (Johnson Controls, Inc. #SCS-8)	1,853.87	112.80
28 46 13 31-1102	EA	Smoke Control Lamp Driver. Outputs For 8 On/off/auto Switches With LED's. Intended For Custom Built Smoke Control Stations. Support One SCE-8L. (Johnson Controls, Inc. #SCS-8L)	1,436.83	112.80
28 46 13 31-1103	EA	Strobe, Standard, 12/24 Volt DC, White (Johnson Controls, Inc. #SCW)	198.35	42.30
28 46 13 31-1104	EA	Strobe, HI, 12/24 Volt DC, Red (Johnson Controls, Inc. #SCWH)	224.87	42.30
28 46 13 31-1105	EA	Strobe, Standard, 12/24 Volt DC, White (Johnson Controls, Inc. #SCW-P)	198.35	42.30
28 46 13 31-1106	EA	Mounting Kit, M300/M500. (Johnson Controls, Inc. #SMB500)	34.60	11.28
28 46 13 31-1107	EA	SMK-MOV Kit-LON. (Johnson Controls, Inc. #SMK-MOVKit-LON)	41.70	5.64
28 46 13 31-1108	EA	SMK-MOV Kit-MSTP. (Johnson Controls, Inc. #SMK-MOVKit-MSTP)	47.79	5.64
28 46 13 31-1109	EA	SPBBS, Wall, Back Box. (Johnson Controls, Inc. #SPBBS)	41.75	5.64
28 46 13 31-1110	EA	Strobe, Standard, 12/24 Volt DC, Red (Johnson Controls, Inc. #SR)	180.06	42.30
28 46 13 31-1111	EA	Strobe, HI, 12/24 Volt DC, Red (Johnson Controls, Inc. #SRH)	224.87	42.30
28 46 13 31-1112	EA	Strobe, HI, Outdoor, Red. (Johnson Controls, Inc. #SRHK)	266.48	47.94
28 46 13 31-1113	EA	Strobe, HI, 12/24 Volt DC, Red (Johnson Controls, Inc. #SRH-P)	224.87	42.30
28 46 13 31-1114	EA	Strobe, Standard, Outdoor, Red. (Johnson Controls, Inc. #SRK)	262.67	47.94
28 46 13 31-1115	EA	Strobe, Standard, 12/24 Volt DC, Red (Johnson Controls, Inc. #SR-P)	198.35	42.30
28 46 13 31-1116	EA	Strobe, Standard, 12/24 Volt DC, White (Johnson Controls, Inc. #SW)	198.35	42.30
28 46 13 31-1117	EA	Strobe, HI, 12/24 Volt DC, White (Johnson Controls, Inc. #SWH)	224.87	42.30
28 46 13 31-1118	EA	Strobe, HI, 12/24 Volt DC, White (Johnson Controls, Inc. #SWH-P)	224.87	42.30
28 46 13 31-1119	EA	Strobe, Standard, 12/24 Volt DC, White (Johnson Controls, Inc. #SW-P)	198.35	42.30
28 46 13 31-1120	EA	Firefighter's Telephone Handset Only. (Johnson Controls, Inc. #TELH-1)	291.66	14.10
28 46 13 31-1121	EA	Universal Digital Alarm Communicator Transmitter. (Johnson Controls, Inc. #UDACT)	1,289.42	56.40
28 46 13 31-1122	EA	Speaker Strobe, Ceiling, White, 2 W (MAX), Dual Voltage, Multi (Johnson Controls, Inc. #SPSCW)	296.48	56.40
28 46 13 31-1123	EA	Speaker, White, Ceiling Mount. (Johnson Controls, Inc. #SPCW)	125.19	28.20
28 46 13 31-1124	EA	Speaker, White, Ceiling Mount, High Db. (Johnson Controls, Inc. #SPCWV)	125.19	28.20
28 46 13 31-1125	EA	Speaker Strobe, Red, Ceiling Mount, Standard Candela. (Johnson Controls, Inc. #SPSCR)	240.08	28.20
28 46 13 31-1126	EA	Speaker Strobe, Red, Ceiling Mount, High Candela. (Johnson Controls, Inc. #SPSCRH)	262.06	28.20
28 46 13 31-1127	EA	Speaker Strobe, Red, Ceiling Mount, High Candela, High Db. (Johnson Controls, Inc. #SPSCRVH)	262.06	28.20
28 46 13 31-1128	EA	Speaker Strobe, White, Ceiling Mount, High Db. (Johnson Controls, Inc. #SPSCWV)	231.35	28.20
28 46 13 31-1129	EA	Speaker Strobe Wall, WP, White, 2W (MAX), Dual Volt, Multi D (Johnson Controls, Inc. #SPSWK)	319.34	28.20
28 46 13 31-1130	EA	Speaker Strobe, Wall, White, Standard Candela. (Johnson Controls, Inc. #SPSW)	240.08	28.20
28 46 13 31-1131	EA	Wall Mount Speaker, White. (Johnson Controls, Inc. #SPW)	125.19	28.20
28 46 13 31-1132	EA	Wall Mount Speaker, Red. (Johnson Controls, Inc. #SPR)	125.19	28.20
28 46 13 31-1133	EA	Speaker Strobe, Wall, White, High Cd. (Johnson Controls, Inc. #SPSWH)	262.06	28.20
28 46 13 31-1134	EA	Speaker Strobe, Wall, Red, High Cd. (Johnson Controls, Inc. #SPSR)	240.08	28.20
28 46 13 31-1135	EA	Speaker Strobe, Wall, Red, High Db, High Candela. (Johnson Controls, Inc. #SPSRV)	240.08	28.20

28 46 13 31-1136 Honeywell Fire Alarm *(28 46 13 31)*

28 46 13 31-1137 Notifier Fire Alarm *(28 46 13 31-1136)*

28 46 13 31-1138 Fire Alarm Control Panel And Accessories *(28 46 13 31-1137)*

28 46 13 31-1139	EA	NFS2-3030 CPU For Intelligent Fire Alarm Control Panel (Notifier CPU2-3030D)	5,912.00	564.00
28 46 13 31-1140	EA	NFS2-640 CPU For Intelligent Fire Alarm Control Panel (Notifier CPU2-640)	4,852.19	564.00
28 46 13 31-1141	EA	Central Processing Unit for NFS2-640 With Integral 240 Volt Power Supply Includes Chassis (Notifier CPU2-640E)	5,399.78	564.00
28 46 13 31-1142	EA	Black, 120 Volt AC, Intelligent Fire Alarm Control Panel (Notifier NFS-320)	5,899.53	564.00
28 46 13 31-1143	EA	Supports Installation Of Optional ACM-Series Annunciator In Same Cabinet, Black, 120 Volt AC, Intelligent Fire Alarm Control Panel (Notifier NFS-320C)	5,779.99	564.00
28 46 13 31-1144	EA	Black, 240 Volt AC, Intelligent Fire Alarm Control Panel (Notifier NFS-320E)	5,627.82	564.00
28 46 13 31-1145	EA	Red, 120 Volt AC, Intelligent Fire Alarm Control Panel (Notifier NFS-320R)	5,482.51	564.00
28 46 13 31-1146	EA	Two-Tone Sequential Module (Notifier 2TTM)	375.62	28.20
28 46 13 31-1147	EA	5', Not Low Loss, Antenna Cable (Notifier 7626-5C)	94.80	5.64
28 46 13 31-1148	EA	25', Low Loss, Antenna Cable (Notifier 7626-25HC)	181.60	11.28
28 46 13 31-1149	EA	50', Low Loss, Antenna Cable (Notifier 7626-50HC)	275.83	16.92
28 46 13 31-1150	EA	IPGSM-COM, IPGSM-COMa Handheld Programmer (Notifier 7720P)	443.93	
28 46 13 31-1151	EA	RJ45-DB9F Serial Programming Cable (Notifier ALMSC-119)	62.76	
28 46 13 31-1152	EA	120 Volt AC Power Supply, Chassis, 80-Character Display, Keypad, NFS-320SYS CPU (Notifier CPU-320SYS)	5,368.10	564.00
28 46 13 31-1153	EA	240 Volt AC Power Supply, Chassis, 80-Character Display, Keypad, NFS-320SYS CPU (Notifier CPU-320SYSE)	5,424.16	564.00
28 46 13 31-1154	EA	3 dB Gain External/Remote Antenna (Notifier GSM-ANT3dB)	236.68	5.64
28 46 13 31-1155	EA	Plug In Transformer Box For IPGSM Communicator (Notifier HPTCOVER)	71.92	5.64
28 46 13 31-1156	EA	Mounting Bracket Kit For SFB-5UD, SFB-10UD, NFW2-100 And NFW-50 (Notifier IPBRKT)	101.22	11.28
28 46 13 31-1157	EA	Chassis To Mount IP Communicator In CHSA Series Chassis (Notifier IPCHSKIT)	99.14	14.10
28 46 13 31-1158	EA	IP Communicator (Notifier IPDACT-2)	765.77	28.20
28 46 13 31-1159	EA	IP Communicator With Upload/Download Capability (Notifier IPDACT-2UD)	889.34	28.20
28 46 13 31-1160	EA	Red, IP Communicator External Mounting Enclosure (Notifier IPENC) Note: Includes IPBRKT.	202.85	28.20
28 46 13 31-1161	EA	Black, IP Communicator External Mounting Enclosure (Notifier IPENC-B) Note: Includes IPBRKT	202.28	28.20

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-1162	EA	Dual 8TPC To Single 8TPC Y-Splitter With Two 9" Cables For Combining Panel Phone Jacks To One IPDACT Input (Notifier IPSPLT)	50.82	11.28
28 46 13 31-1163	EA	Loop Control Module (Notifier LCM-320)	2,203.32	56.40
28 46 13 31-1164	EA	Loop Expander Module (Notifier LEM-320)	1,758.09	56.40
28 46 13 31-1165	EA	Keyboard Display Module For CPU2-640 (Notifier KDM-R2)	1,669.96	56.40
28 46 13 31-1166	EA	7' DACT Phone Cord (Notifier MCBL-7)	24.67	
28 46 13 31-1167	EA	Back Box For UDACT, With Viewing Window And Optional Relay Mount (Notifier UBS-1)	218.70	14.10
28 46 13 31-1168	EA	Red, Metal Enclosure With Solid Door For Remote Mounting Of The UDACT-2 (Notifier UBS-1R)	246.90	28.20
28 46 13 31-1169	EA	Black, Metal Enclosure With Solid Door For Remote Mounting Of The UDACT-2 (Notifier UBS-1B)	246.90	28.20
28 46 13 31-1170	EA	Universal Digital Alarm Communicator Transmitter (Notifier UDACT-2)	1,120.35	28.20
28 46 13 31-1171	EA	Universal Zone Coder (Notifier UZC-256)	1,571.18	28.20
28 46 13 31-1172	EA	Hardware Kit To Connect UZC-256 To A PC (Notifier UZC-HI) Note: Includes null modem cable, AC power adapter, and 9-pin to 25-pin converter.	493.67	
28 46 13 31-1173	EA	Programming Software For ONYX Series Products, DVC And Associated Amplifiers, DVC-RPU And UDACT-2 (Notifier VERIFIRE-TCD)	732.87	
28 46 13 31-1174	EA	ONYX Series Verifire Tools Upgrade (Notifier VERIFIREUG-TCD)	479.24	
28 46 13 31-1175	EA	Central Station Receiver For Fire And Security (Notifier VISORALARM-PLUS)	7,081.78	16.92
28 46 13 31-1176	EA	Surface Back Box For NBG-12LRA (Notifier SBA-10)	53.49	14.10
28 46 13 31-1177	EA	Up To 50 Addressable Devices Supported, Addressable Fire Alarm Control Panel (Notifier NFW-50X)	2,830.63	564.00
28 46 13 31-1178	EA	Up To 198 Addressable Devices Supported, Addressable Fire Alarm Control Panel (Notifier NFW-100X)	4,126.47	564.00
28 46 13 31-1179		ONYX Cabinets *(28 46 13 31-1137)*		
28 46 13 31-1180	EA	Red, Two Tier Door For CA-2 Chassis Configuration (Notifier ADDR-B4R)	539.65	14.10
28 46 13 31-1181	EA	Red, Three Tier Door For CA-2 Chassis Configuration (Notifier ADDR-C4R)	723.61	14.10
28 46 13 31-1182	EA	Red, Four Tier Door For CA-2 Chassis Configuration (Notifier ADDR-D4R)	893.63	14.10
28 46 13 31-1183	EA	Battery Dress Plate For NFS-640 And NFS-3030 (Notifier BP-4)	128.80	16.92
28 46 13 31-1184	EA	Chassis Bridge (Notifier CB-1)	117.16	14.10
28 46 13 31-1185	EA	Four Position Chassis (Notifier CHS-4)	198.11	14.10
28 46 13 31-1186	EA	Low Profile 1st Row Chassis Assembly For CPU-640 / CPU-640E (Notifier CHS-M2)	219.87	28.20
28 46 13 31-1187	EA	Black, Dress Panel Blank, Covers Unused Cabinet Row(s) (Notifier DP-1B)	113.36	16.92
28 46 13 31-1188	EA	Dress Plate For Top Row With CPU2-3030D (Notifier DP-DISP)	144.54	16.92
28 46 13 31-1189	EA	One Tier, "A" Size Door Assembly, Lexan Window, Lock And Keys (Notifier DR-A4)	411.05	28.20
28 46 13 31-1190	EA	One Tier, "A" Size Door Assembly, Solid Door, Lock And Keys (Notifier DR-A4B)	260.05	28.20
28 46 13 31-1191	EA	Two Tier, "B" Size Door Assembly, Lexan Window, Lock And Keys (Notifier DR-B4)	519.61	42.30
28 46 13 31-1192	EA	Two Tier, "B" Size Door Assembly, Solid Door, Lock And Keys (Notifier DR-B4B)	318.73	42.30
28 46 13 31-1193	EA	Three Tier, "C" Size Door Assembly, Lexan Window, Lock And Keys (Notifier DR-C4)	776.39	56.40
28 46 13 31-1194	EA	Three Tier, "C" Size Door Assembly, Solid Door, Lock And Keys (Notifier DR-C4B)	470.23	56.40
28 46 13 31-1195	EA	Four Tier, "D" Size Door Assembly, Lexan Window, Lock And Keys (Notifier DR-D4)	941.75	70.50
28 46 13 31-1196	EA	Four Tier, "D" Size Door Assembly, Solid Door, Lock And Keys (Notifier DR-D4B)	545.54	70.50
28 46 13 31-1197	EA	Black, One Tier, "AA" Size Door Assembly With Window, Lock And Keys (Notifier DR-AA4)	314.24	14.10
28 46 13 31-1198	EA	Black, One Tier, "AA" Size Door Assembly, Lock And Keys (Notifier DR-AA4B)	215.84	14.10
28 46 13 31-1199	EA	Red, One Tier, "AA" Size Door Assembly, Lock And Keys (Notifier DR-AA4BR)	215.84	14.10
28 46 13 31-1200	EA	Red, One Tier, "AA" Size Door Assembly With Window, Lock And Keys (Notifier DR-AA4R)	319.96	14.10
28 46 13 31-1201	EA	Red, One Tier, "A" Size Blank Door Assembly, Lock And Keys (Notifier DR-A4BR)	243.30	14.10
28 46 13 31-1202	EA	Red, One Tier, "A" Size Door Assembly, Lexan Window, Lock And Keys (Notifier DR-A4R)	405.77	14.10
28 46 13 31-1203	EA	Red, Two Tier, "B" Size Door Assembly, Solid Door, Lock And Keys (Notifier DR-B4BR)	277.05	14.10
28 46 13 31-1204	EA	Red, Two Tier, "B" Size Door Assembly, Lexan Window, Lock And Keys (Notifier DR-B4R)	483.57	14.10
28 46 13 31-1205	EA	Red, Three Tier, "C" Size Door Assembly, Solid Door, Lock And Keys (Notifier DR-C4BR)	398.90	14.10
28 46 13 31-1206	EA	Red, Three Tier, "C" Size Door Assembly, Lexan Window, Lock And Keys (Notifier DR-C4R)	718.12	14.10
28 46 13 31-1207	EA	Red, Four Tier, "D" Size Door Assembly, Solid Door, Lock And Keys (Notifier DR-D4BR)	446.96	14.10
28 46 13 31-1208	EA	Red, Four Tier, "D" Size Door Assembly, Lexan Window, Lock And Keys (Notifier DR-D4R)	860.00	14.10
28 46 13 31-1209	EA	Black, Two Tiers, Equipment Back Box Assembly (Notifier EQBB-B4)	412.23	28.20
28 46 13 31-1210	EA	Black, Three Tiers, Equipment Back Box Assembly (Notifier EQBB-C4)	609.02	28.20
28 46 13 31-1211	EA	Black, Four Tiers, Equipment Back Box Assembly (Notifier EQBB-D4)	714.29	28.20
28 46 13 31-1212	EA	Black, Vented, Two Tiers, Equipment Door Assembly (Notifier EQDR-B4)	431.68	28.20
28 46 13 31-1213	EA	Black, Vented, Three Tiers, Equipment Door Assembly (Notifier EQDR-C4)	652.50	28.20
28 46 13 31-1214	EA	Black, Vented, Four Tiers, Equipment Door Assembly (Notifier EQDR-D4)	762.34	28.20
28 46 13 31-1215	EA	Red, Two Tiers, Equipment Back Box Assembly (Notifier EQBB-B4R)	415.66	28.20
28 46 13 31-1216	EA	Red, Three Tiers, Equipment Back Box Assembly (Notifier EQBB-C4R)	609.02	28.20
28 46 13 31-1217	EA	Red, Four Tiers, Equipment Back Box Assembly (Notifier EQBB-D4R)	723.44	28.20
28 46 13 31-1218	EA	Red, Vented, Two Tiers, Equipment Door Assembly (Notifier EQDR-B4R)	452.28	28.20
28 46 13 31-1219	EA	Red, Vented, Three Tiers, Equipment Door Assembly (Notifier EQDR-C4R)	652.50	28.20
28 46 13 31-1220	EA	Red, Vented, Four Tiers, Equipment Door Assembly (Notifier EQDR-D4R)	762.34	28.20
28 46 13 31-1221	EA	Back Box With Door For ONYX Firstvision™ (Notifier FIRSTVISION-ENC)	4,546.31	141.01
28 46 13 31-1222	EA	CAB-4 Series Mounting Kit (Notifier P40-KITB) Note: Includes chassis, hinged dress plate, and mounting hardware.	387.06	28.20
28 46 13 31-1223	EA	Black, One Tier Back Box Assembly (Notifier SBB-A4)	438.36	84.60
28 46 13 31-1224	EA	Black, Two Tier Back Box Assembly (Notifier SBB-B4)	623.00	112.80
28 46 13 31-1225	EA	Black, Three Tier Back Box Assembly (Notifier SBB-C4)	836.75	112.80
28 46 13 31-1226	EA	Black, Four Tier Back Box Assembly (Notifier SBB-D4)	1,016.64	141.01
28 46 13 31-1227	EA	Black, Mini, One Tier, Back Box (Notifier SBB-AA4)	242.90	28.20
28 46 13 31-1228	EA	Red, Mini, One Tier, Back Box (Notifier SBB-AA4R)	242.90	28.20
28 46 13 31-1229	EA	Red, One Tier Back Box Assembly (Notifier SBB-A4R)	295.53	28.20
28 46 13 31-1230	EA	Red, Two Tier Back Box Assembly (Notifier SBB-B4R)	411.09	28.20
28 46 13 31-1231	EA	Red, Three Tier Back Box Assembly (Notifier SBB-C4R)	602.16	28.20
28 46 13 31-1232	EA	Red, Four Tier Back Box Assembly (Notifier SBB-D4R)	712.00	28.20
28 46 13 31-1233	EA	Trim Ring For NFS-320 Cabinet (Notifier TR-320)	234.64	16.92
28 46 13 31-1234	EA	Red, Trim Ring For NFS-320 Cabinet (Notifier TR-320R)	234.64	16.92
28 46 13 31-1235	EA	Black, AA Size Trim Ring For CAB-4 Or CAB-3 Series Cabinet (Notifier TR-AA4)	316.45	16.92
28 46 13 31-1236	EA	Black, A Size Trim Ring For CAB-4 Or CAB-3 Series Cabinet (Notifier TR-A4)	250.08	16.92

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-1237	EA	Black, B Size Trim Ring For CAB-4 Or CAB-3 Series Cabinet (Notifier TR-B4)	251.80	16.92
28 46 13 31-1238	EA	Black, C Size Trim Ring For CAB-4 Or CAB-3 Series Cabinet (Notifier TR-C4)	248.94	16.92
28 46 13 31-1239	EA	Black, D Size Trim Ring For CAB-4 Or CAB-3 Series Cabinet (Notifier TR-D4)	255.23	16.92
28 46 13 31-1240	EA	2" Filler Dress Plate For ADP-4B Installed In The Top Row Of A CAB-4 Series Back Box (Notifier VP-2B)	90.36	16.92
28 46 13 31-1241	EA	Wire Trays For Routing Wire In A CAB-4 Series Back Box (Notifier WC-2)	63.00	5.64
28 46 13 31-1242		**NFS2-3030/640 Cabinet Mechanicals** *(28 46 13 31-1137)*		
28 46 13 31-1243	EA	Dress Plate For Middle Rows With CPU2-640 (Notifier ADP2-640)	149.42	16.92
28 46 13 31-1244	EA	Blank Module Dress Plate (Notifier BM-1B)	122.50	16.92
28 46 13 31-1245	EA	Battery Dress Plate For NFS2-3030, NFS2-640, NCA-2 And DVC System (Notifier BP2-4)	139.92	16.92
28 46 13 31-1246	EA	Four Position Expansion Chassis (Notifier CHS-4MB)	308.52	14.10
28 46 13 31-1247	EA	Standard 1st Row Chassis Assembly For CPU-3030 (Notifier CHS-M3)	312.59	42.30
28 46 13 31-1248	EA	Dress Plate For Top Row With CPU2-640 (Notifier DP-DISP2)	155.75	16.92
28 46 13 31-1249		**NFS-3030/640 Cabinet Mechanicals** *(28 46 13 31-1137)*		
28 46 13 31-1250	EA	Annunciator Dress Plate (Notifier ADP-4B)	141.50	16.92
28 46 13 31-1251	EA	Blank Module Dress Plate (Notifier BMP-1)	86.09	16.92
28 46 13 31-1252	EA	Low Profile Four Position Chassis For AA-30 Or LDM (Notifier CHS-4L)	198.10	28.20
28 46 13 31-1253	EA	Module Dress Plate (Notifier MP-1B)	143.09	16.92
28 46 13 31-1254		**Battery Cabinets** *(28 46 13 31-1137)*		
28 46 13 31-1255	EA	Six Position Chassis (Notifier CHS-6)	123.37	28.20
28 46 13 31-1256	EA	Black, 24" x 14" x 7-3/4" Battery Back Box (Notifier NFS-LBB)	634.68	84.60
28 46 13 31-1257		**Digital Voice** *(28 46 13 31-1137)*		
28 46 13 31-1258	EA	Chassis Used With BB-XP (Notifier 18439)	57.38	14.10
28 46 13 31-1259	EA	220 Volt AC, 100 Watt, 70.7 VRMS, Tone Generator, Audio Amplifier (Notifier AA-100E)	3,223.87	42.30
28 46 13 31-1260	EA	220 Volt AC, 120 Watt, 25 VRMS, Tone Generator, Audio Amplifier (Notifier AA-120E)	3,132.20	42.30
28 46 13 31-1261	EA	220 Volt AC, 30 Watt, 25 VRMS Audio Amplifier (Notifier AA-30E)	1,555.80	42.30
28 46 13 31-1262	EA	Black, Two Tier Door For CA-2 Chassis Configuration (Notifier ADDR-B4)	665.66	42.30
28 46 13 31-1263	EA	Black, Three Tier Door For CA-2 Chassis Configuration (Notifier ADDR-C4)	902.86	56.40
28 46 13 31-1264	EA	Black, Four Tier Door For CA-2 Chassis Configuration (Notifier ADDR-D4)	1,124.23	70.50
28 46 13 31-1265	EA	Multimode Audio Fiber Link Receiver (Notifier AFL-RM)	1,359.29	28.20
28 46 13 31-1266	EA	Multimode Audio Fiber Link Transmitter (Notifier AFL-TM)	1,359.29	28.20
28 46 13 31-1267	EA	Single Mode Audio Fiber Link Transmitter (Notifier AFL-TS)	2,943.20	28.20
28 46 13 31-1268	EA	15" x 8-3/8" x 3-3/8", Flush Or Surface Mounted Back Box (Notifier AFAWS-BX)	121.73	14.10
28 46 13 31-1269	EA	Flush Mounted, Key Lock, Door (Notifier AFAWS-KR)	206.69	14.10
28 46 13 31-1270	EA	Surface Mounted, Key Lock, Door (Notifier AFAWS-KS)	207.83	14.10
28 46 13 31-1271	EA	Flush Mounted, Latch Style Lock, Door (Notifier AFAWS-LR)	200.97	14.10
28 46 13 31-1272	EA	Surface Mounted, Latch Style Lock, Door (Notifier AFAWS-LS)	203.26	14.10
28 46 13 31-1273	EA	Armored Coil Cord, Telephone Chassis (Notifier AFAWS-TELA)	416.07	14.10
28 46 13 31-1274	EA	Coil Cord, Telephone Chassis (Notifier AFAWS-TELC)	317.67	14.10
28 46 13 31-1275	EA	Hammer Attached To Chain, Breakglass Insert (Notifier BRKG-B)	130.27	
28 46 13 31-1276	EA	For 25 VRMS DAX Or DAA2 Series, Back-Up Digital Amplifier (Notifier BDA-25V)	800.27	28.20
28 46 13 31-1277	EA	For 70 VRMS DAX Or DAA2 Series, Back-Up Digital Amplifier (Notifier BDA-70V)	807.78	28.20
28 46 13 31-1278	EA	Blank Dress Plate For CA-2 (Notifier BP-CA2)	120.02	14.10
28 46 13 31-1279	EA	One Tier Chassis For Digital Voice Command Panel (Notifier CA-1)	170.40	28.20
28 46 13 31-1280	EA	Two Tier Chassis For Digital Voice Command Panel, With MIC-1 (Notifier CA-2)	550.08	42.30
28 46 13 31-1281	EA	Black, 6.08" x 8.301" x 3.655", Remote Cabinet (Notifier CAB-RM)	241.18	28.20
28 46 13 31-1282	EA	Red, 6.08" x 8.301" x 3.655", Remote Cabinet (Notifier CAB-RMR)	241.18	28.20
28 46 13 31-1283	EA	Chassis, Phone Well, TELH-1 And Hardware (Notifier CFFT-1)	314.24	14.10
28 46 13 31-1284	EA	Chassis With Paging Microphone With Well (Notifier CMIC-1)	310.81	14.10
28 46 13 31-1285	EA	120 Volt AC, 50 Watt, 25 VRMS Digital Audio Amplifier (Notifier DAA-5025)	2,333.16	28.20
28 46 13 31-1286	EA	Multi-Mode Fiber-Optic Media 50 Watt, 25 VRMS Digital Audio Amplifier (Notifier DAA-5025F)	2,020.48	28.20
28 46 13 31-1287	EA	Single-Mode Fiber-Optic Media 50 Watt, 25 VRMS Digital Audio Amplifier (Notifier DAA-5025SF)	2,020.48	28.20
28 46 13 31-1288	EA	120 Volt AC, 50 Watt, 70 VRMS Digital Audio Amplifier (Notifier DAA-5070)	2,409.15	28.20
28 46 13 31-1289	EA	Multi-Mode Fiber-Optic Media 50 Watt, 70 VRMS Digital Audio Amplifier (Notifier DAA-5070F)	2,139.52	28.20
28 46 13 31-1290	EA	120 Volt AC, 75 Watt, 25 VRMS Digital Audio Amplifier (Notifier DAA-7525)	2,502.57	28.20
28 46 13 31-1291	EA	Single-Mode Fiber-Optic Media 75 Watt, 25 VRMS Digital Audio Amplifier (Notifier DAA-7525SF)	2,645.42	28.20
28 46 13 31-1292	EA	Single-Mode Fiber-Optic Media 75 Watt, 25 VRMS Digital Audio Amplifier (Notifier DAA-7525SF)	2,645.42	28.20
28 46 13 31-1293	EA	220-240 Volt AC, 50 Watt, 25 VRMS Digital Audio Amplifier (Notifier DAA2-5025E)	2,627.62	28.20
28 46 13 31-1294	EA	220-240 Volt AC, 50 Watt, 70 VRMS Digital Audio Amplifier (Notifier DAA2-5070E)	2,702.76	28.20
28 46 13 31-1295	EA	220-240 Volt AC, 75 Watt, 25 VRMS Digital Audio Amplifier (Notifier DAA2-7525E)	2,819.98	28.20
28 46 13 31-1296	EA	120 Volt AC, 35 Watt, 25 VRMS, Digital Audio Amplifier (Notifier DAX-3525)	1,775.56	28.20
28 46 13 31-1297	EA	220-240 Volt AC, 35 Watt, 25 VRMS, Digital Audio Amplifier (Notifier DAX-3525E)	1,823.65	28.20
28 46 13 31-1298	EA	120 Volt AC, 35 Watt, 70 VRMS, Digital Audio Amplifier (Notifier DAX-3570)	1,867.23	28.20
28 46 13 31-1299	EA	220-240 Volt AC, 35 Watt, 70 VRMS, Digital Audio Amplifier (Notifier DAX-3570E)	1,930.34	28.20
28 46 13 31-1300	EA	120 Volt AC, 50 Watt, 25 VRMS, Digital Audio Amplifier (Notifier DAX-5025)	1,943.87	28.20
28 46 13 31-1301	EA	220-240 Volt AC, 50 Watt, 25 VRMS, Digital Audio Amplifier (Notifier DAX-5025E)	2,002.47	28.20
28 46 13 31-1302	EA	120 Volt AC, 50 Watt, 70 VRMS, Digital Audio Amplifier (Notifier DAX-5070)	2,061.08	28.20
28 46 13 31-1303	EA	220-240 Volt AC, 50 Watt, 70 VRMS, Digital Audio Amplifier (Notifier DAX-5070E)	2,166.28	28.20
28 46 13 31-1304	EA	Dress Plate For CFFT-1 (Notifier DP-CFFT)	139.47	14.10
28 46 13 31-1305	EA	Dress Panel For One Tier Chassis For Digital Voice Command Panel (Notifier DPA-1)	133.59	16.92
28 46 13 31-1306	EA	Dress Panel For One Tier Chassis For Digital Voice Command Panel, Supports Keypad (Notifier DPA-1A4)	155.75	16.92
28 46 13 31-1307	EA	Dress Panel For Two Tier Chassis For Digital Voice Command Panel (Notifier DPA-2B)	274.50	16.92
28 46 13 31-1308	EA	WPS Power Amplifier (Notifier DPA3204P)	955.05	28.20

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-1309	EA	WPS Power Amplifier (Notifier DPA4001P)	800.27	28.20
28 46 13 31-1310	EA	Modem Interface For Direct Wire (No Dial-Up Capabilities) For Interconnecting Panels (Notifier DPI-232)	1,846.19	28.20
28 46 13 31-1311	EA	120 Volt AC,125 Watt, 25 VRMS Digital Series Amplifier (Notifier DS-AMP) Note: Can Be Converted To 70 VRMS, 100 Watts With A DS-XF70V	1,372.82	28.20
28 46 13 31-1312	EA	220-240 Volt AC, 125 Watt, 25 VRMS Digital Series Amplifier (Notifier DS-AMPE) Note: Can Be Converted To 70 VRMS, 100 Watts With A DS-XF70V	1,389.35	28.20
28 46 13 31-1313	EA	Digital Series Distribution Board, Supports One To Four DS-AMP Or DS-AMPE (Notifier DS-DB)	2,336.09	28.20
28 46 13 31-1314	EA	125 Watt, 25 VRMS DS Series Backup Amplifier Board (Can Be Converted To 70 VRMS, 100 Watt Amplifier With A DS-XF70V) (Notifier DS-BDA)	890.43	28.20
28 46 13 31-1315	EA	Converts One DAX Or DAA2 DAL Port To Multi-Mode Fiber, Fiber Option Module (Notifier DS-FM)	363.03	28.20
28 46 13 31-1316	EA	Converts One DAX Or DAA2 Port To ST Style Multi-Mode Fiber (For Connection To DVC-EMF Or DAA-XXXF Series Amplifier), Fiber Option Module (Notifier DS-RFM)	363.03	28.20
28 46 13 31-1317	EA	Converts One DAX Or DAA2 DAL Port To Single-Mode Fiber, Fiber Option Module (Notifier DS-SFM)	363.03	28.20
28 46 13 31-1318	EA	Converts DS-AMP, DS-AMPE, Or DS-BDA To 70 VRMS, 100 Watt, DS Series Transformer (Notifier DS-XF70V)	151.65	28.20
28 46 13 31-1319	EA	Analog Output Board For Digital Voice Command (Notifier DVC-AO)	396.81	28.20
28 46 13 31-1320	EA	Extended Memory For Digital Voice Command (Notifier DVC-EM)	2,352.16	28.20
28 46 13 31-1321	EA	Keypad For Digital Voice Command (Notifier DVC-KD)	659.03	56.40
28 46 13 31-1322	EA	Microphone For NFC-50/100, NFC-LOC, NFC-RPU And NFC-RM (Notifier ECC-MICROPHONE)	291.60	
28 46 13 31-1323	EA	Portable Fireman's Telephone Handset (Notifier FHS)	174.32	
28 46 13 31-1324	EA	Red, Fireman's Telephone Handset (Notifier FHS-F)	202.35	
28 46 13 31-1325	EA	Recessed, Fireman's Handset Storage Cabinet, Holds Six Handsets (Notifier FHSC-R)	502.62	28.20
28 46 13 31-1326	EA	Surface Mounted, Fireman's Handset Storage Cabinet, Holds Six Handsets (Notifier FHSC-S)	502.62	28.20
28 46 13 31-1327	EA	Fireman's Phone Jack On A Single Gang Plate (Notifier FPJ)	81.22	8.46
28 46 13 31-1328	EA	Paging Microphone Only (Notifier MIC-1)	263.81	28.20
28 46 13 31-1329	EA	Firefighter's Telephone Handset (Notifier TELH-1)	199.49	
28 46 13 31-1330	EA	Remote Microphone Assembly For Mounting On An ADP-4 Dress Plate (Notifier RM-1)	672.30	28.20
28 46 13 31-1331	EA	Remote Microphone Assembly For Mounting In A Stand-Alone Cabinet (Notifier RM-1SA)	672.30	28.20

28 46 13 31-1332 Amplifiers *(28 46 13 31-1137)*

28 46 13 31-1333	EA	30 Watt Audio Amplifier At 25 VRMS, 120 Volt AC (Notifier AA-30)	1,305.61	28.20
28 46 13 31-1334	EA	100 Watt Audio Amplifier At 70.7 VRMS, 120 Volt AC, Tone Generator (Notifier AA-100)	2,865.14	28.20
28 46 13 31-1335	EA	120 Watt Audio Amplifier At 25 VRMS, 120 Volt AC, Tone Generator (Notifier AA-120)	2,782.81	28.20
28 46 13 31-1336	EA	Audio Coupling Transformer (Notifier ACT-1)	187.81	28.20
28 46 13 31-1337	EA	Audio Coupling Transformer For DVC-AO (Notifier ACT-4)	222.64	28.20
28 46 13 31-1338	EA	Audio Coupling Transformer For DAA-5025 (Notifier ACT-25)	222.64	28.20
28 46 13 31-1339	EA	Audio Coupling Transformer For DAA-5070 (Notifier ACT-70)	222.64	28.20
28 46 13 31-1340	EA	50 Watt, 25 Volt, 120 VAC Digital Amplifier (Notifier DAA2-5025)	2,514.92	28.20
28 46 13 31-1341	EA	50 Watt, 70 Volt, 120 VAC Digital Amplifier (Notifier DAA2-5070)	2,602.08	28.20
28 46 13 31-1342	EA	75 Watt, 25 Volt, 120 VAC Digital Amplifier (Notifier DAA2-7525)	2,704.26	28.20
28 46 13 31-1343	EA	Distributed Amplifier With Backup Capability (Notifier NFC-50/100DA) Note: Requires NFC-BDA-BU	4,955.40	28.20
28 46 13 31-1344	EA	50 Watt, 25 Volt Amplifier For A Second Speaker Circuit Or Backup (Notifier NFC-BDA-25V) Note: Requires NFC-BDA-BU	965.57	28.20
28 46 13 31-1345	EA	50 Watt, 70 Volt Amplifier For A Second Speaker Circuit Or Backup (Notifier NFC-BDA-70V) Note: Requires NFC-BDA-BU	970.08	28.20

28 46 13 31-1346 FireVoice-25/50 Emergency Voice Evacuation Control Panels *(28 46 13 31-1137)*

28 46 13 31-1347	EA	25 Watt, 25 VRMS Voice Evacuation Control Panel (Notifier NFV-25/50)	5,243.64	564.00
28 46 13 31-1348	EA	Single Channel 25 Watt, 25 VRMS Voice Evacuation Control Panel (Notifier NFV-25/50DA)	3,627.74	564.00
28 46 13 31-1349	EA	Single Channel 25 Watt, 25 VRMS Voice Evacuation Control Panel Used With NFV-25/50ZS (Notifier NFV-25/50DAZS)	4,788.33	564.00
28 46 13 31-1350	EA	Zoned System 25 Watt, 25 VRMS Voice Evacuation Control Panel (Notifier NFV-25/50ZS)	6,306.03	564.00
28 46 13 31-1351	EA	Zoned System With Telephone 25 Watt, 25 VRMS Voice Evacuation Control Panel (Notifier NFV-25/50ZST)	7,002.39	564.00

28 46 13 31-1352 System Printer *(28 46 13 31-1137)*

28 46 13 31-1353	EA	80 Column, 120 Volt AC, Desktop Printer (Notifier PRN-6)	2,846.14	28.20

28 46 13 31-1354 Batteries *(28 46 13 31-1137)*

28 46 13 31-1355	EA	5 Ampere Hours, 12 Volt DC, Sealed Battery Pack (Notifier BAT-1250-BP)	652.50	28.20
28 46 13 31-1356	EA	7 Ampere Hours, 12 Volt DC, Sealed Battery Pack (Notifier BAT-1270-BP)	597.88	28.20
28 46 13 31-1357	EA	12 Ampere Hours, 12 Volt DC, Sealed Battery Pack (Notifier BAT-12120-BP)	791.04	28.20
28 46 13 31-1358	EA	18 Ampere Hours, 12 Volt DC, Sealed Battery Pack (Notifier BAT-12180-BP)	455.39	28.20
28 46 13 31-1359	EA	26 Ampere Hours, 12 Volt DC, Sealed Battery Pack (Notifier BAT-12260-BP)	642.21	28.20
28 46 13 31-1360	EA	55 Ampere Hours, 12 Volt DC, Sealed Battery (Notifier BAT-12550)	640.63	28.20
28 46 13 31-1361	EA	100 Ampere Hours, 12 Volt DC, Sealed Battery (Notifier BAT-121000)	1,028.22	28.20

28 46 13 31-1362 Battery Back Boxes And Miscellaneous Mechanicals *(28 46 13 31-1137)*

28 46 13 31-1363	EA	14-1/2" x 8-1/4" x 4-3/4", Holds Up To Two BAT-12180 Batteries, Battery Back Box (Notifier BB-17)	176.13	22.56
28 46 13 31-1364	EA	24" x 12.55" x 5.218", Mounts Up To Six XP6 Boards Or ACPS-610, Cabinet (Notifier BB-25) Note: XP6 modules require a CHS-6.	299.12	22.56
28 46 13 31-1365	EA	15.6" x 15.5" x 5.152", Mounts Up To Two 26 Ampere Hours And Charger, Battery Back Box (Notifier BB-26)	475.76	112.80
28 46 13 31-1366	EA	Holds Up To Two BAT-12120 12 Ampere Hours Batteries, Battery Holder (Notifier CHS-BH)	218.63	56.40
28 46 13 31-1367	EA	Holds Up To Two BAT-12120 12 Ampere Hours Batteries, Battery Holder (Notifier CHS-BH1)	127.17	14.10
28 46 13 31-1368	EA	Battery Bracket For Two 26 Ampere Hours Batteries (Notifier SEISKIT-BB25)	294.57	22.56
28 46 13 31-1369	EA	Two 26 Ampere Hours Battery Bracket Seismic Kit For CAB-4 Series Cabinets (Notifier SEISKIT-CAB)	237.34	22.56

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-1370	EA	Two 12 Ampere Hours Battery Bracket Seismic Kit For DAX, DAA, And DAA2 Series Amplifiers (Notifier SEISKIT-DAA)	264.22	22.56
28 46 13 31-1371	EA	Two 55 Ampere Hours Battery Bracket Seismic Kit For NFS-LBB (Notifier SEISKIT-LBB)	281.96	22.56
28 46 13 31-1372	EA	Two 7, 12, Or 18 Ampere Hour Battery Bracket Seismic Kit For FIREVOICE 25/50 Series (Notifier SEISKIT-2550)	421.55	22.56
28 46 13 31-1373	EA	Two 26 Ampere Hour Battery Bracket Seismic Kit For NFS-320 And BB-26 Series (Notifier SEISKIT-320/B26)	247.63	22.56
28 46 13 31-1374	EA	Two 100 Ampere Hour Battery Bracket Seismic Kit For BB-100 And BB-200 Series (Notifier SEISKIT-BB100) Note: Two kits are required for the BB-200	352.90	22.56
28 46 13 31-1375	EA	Two 18 Ampere Hour Battery Bracket Seismic Kit For BB-17 Series (Notifier SEISKIT-BB17) Note: Two kits are required for the BB-200	304.84	22.56
28 46 13 31-1376	EA	Two 26 Ampere Hour Battery Bracket Seismic Kit For BB-25 Series (Notifier SEISKIT-BB25) Note: Two kits are required for the BB-200	311.71	22.56
28 46 13 31-1377	EA	Two 7, 12, Or 18 Ampere Hour Battery Bracket Seismic Kit For SFP-5UD, SFP-10UD, Firewarden 100-2, RP-2001, And RP-2002 Series (Notifier SEISKIT-COMMENC) Note: Two kits are required for the BB-200	271.66	22.56
28 46 13 31-1378	EA	Two 7 Or 12 Ampere Hour Battery Bracket Seismic Kit For FCPS-24S6/8, CAB-PS1, SFP-2402 And SFP-2404 Series (Notifier SEISKIT-PS/2/4) Note: Two kits are required for the BB-200	254.50	22.56

28 46 13 31-1379 Power Supplies And Chargers *(28 46 13 31-1137)*

28 46 13 31-1380	EA	120 Volt AC, 6 Or 10 Amperes, Addressable Charging Power Supply (Notifier ACPS-610)	2,155.40	42.30
28 46 13 31-1381	EA	220/240 Volt AC, 6 Or 10 Amperes, Addressable Charging Power Supply (Notifier ACPS-610E)	2,263.60	42.30
28 46 13 31-1382	EA	Addressable Power Supply, 120 Volt AC For NFS-3030, NFS2-3030 And NCA-2 (Notifier AMPS-24)	2,002.25	28.20
28 46 13 31-1383	EA	6A Auxiliary Power Supply (Notifier APS-6R)	1,079.51	28.20
28 46 13 31-1384	EA	10 Amperes Battery Charger (Notifier BC10A)	1,176.12	42.30
28 46 13 31-1385	EA	33.34" x 22.5" x 7.5", Combination Power Supply And Battery Enclosure For NFS-3030 Or NFS2-3030 (Notifier BB-100) Note: Holds four 55 ampere hour or two 100 ampere hour batteries	643.19	33.84
28 46 13 31-1386	EA	Red, 33.34" x 22.5" x 7.5", Combination Power Supply And Battery Enclosure For NFS-3030 Or NFS2-3030 (Notifier BB-100R) Note: Holds four 55 ampere hour or two 100 ampere hour batteries	651.20	33.84
28 46 13 31-1387	EA	30.34" x 36.5" x 7.5", Combination Power Supply And Battery Enclosure For NFS2-3030 (Notifier BB-200) Note: Holds four 55 ampere hour or four 100 ampere hour batteries	1,262.37	33.84
28 46 13 31-1388	EA	30.34" x 36.5" x 7.5", Holds Four 55 Ampere Hours Or Four 100 Ampere Hours Batteries, For NFS2-3030, Red, Combination Power Supply And Battery Enclosure (Notifier BB-200R)	1,262.37	33.84
28 46 13 31-1389	EA	15.218" x 14.5" x 3.562" ACPS Stand-Alone Cabinet (Notifier CAB-PS1)	221.16	28.20
28 46 13 31-1390	EA	25 To 120 Ampere Hours Battery Charger (Notifier CHG-120)	1,539.93	28.20
28 46 13 31-1391	EA	Mounts XPIQ-Ps And/or CHS-BH In A CAB-3/4 Row, Also Mount One ACPS-610 In CAB-3 Row, Chassis Assembly (Notifier CHS-PS)	99.14	14.10
28 46 13 31-1392	EA	Door Used For Mounting ACPS-610 (E) In a CAB-PS1 Cabinet When Replacing ACPS-2406 (Notifier DR-PS1)	158.06	14.10
28 46 13 31-1393	EA	8 Amperes, 120 Volt AC Remote Charger Power Supply (Notifier FCPS-24S8)	1,015.87	28.20
28 46 13 31-1394	EA	8.0 Amperes, 240 Volt AC Remote Charger Power Supply (Notifier FCPS-24S8E)	1,209.11	84.60
28 46 13 31-1395	EA	Red, 8 Amperes, 240 Volt AC Remote Charger Power Supply (Notifier FCPS-24S8R)	1,153.51	84.60
28 46 13 31-1396	EA	8 Amperes, 24 Volt DC, 120 Volt AC, NAC Fire Alarm Power Supply (Notifier HPFF8)	1,347.36	84.60
28 46 13 31-1397	EA	8 Amperes, 24 Volt DC, 220 Volt AC, NAC Fire Alarm Power Supply (Notifier HPFF8E)	1,335.34	84.60
28 46 13 31-1398	EA	Chassis Mounted, 8 Amperes, 24 Volt DC, 120 Volt AC, NAC Fire Alarm Power Supply (Notifier HPFF8CM)	1,340.91	42.30
28 46 13 31-1399	EA	Chassis Mounted, 8 Amperes, 24 Volt DC, 220 Volt AC, NAC Fire Alarm Power Supply (Notifier HPFF8CME)	1,340.91	42.30
28 46 13 31-1400	EA	12 Amperes, 24 Volt DC, 120 Volt AC, NAC Fire Alarm Power Supply (Notifier HPFF12)	1,673.02	42.30
28 46 13 31-1401	EA	12 Amperes, 24 Volt DC, 220 Volt AC, NAC Fire Alarm Power Supply (Notifier HPFF12E)	1,596.38	42.30
28 46 13 31-1402	EA	12 Amperes, 24 Volt DC, 120 Volt AC, Chassis Mounted, NAC Fire Alarm Power Supply (Notifier HPFF12CM)	1,698.56	84.60
28 46 13 31-1403	EA	12 Amperes, 24 Volt DC, 220 Volt AC, Chassis Mounted, NAC Fire Alarm Power Supply (Notifier HPFF12CME)	1,698.56	84.60
28 46 13 31-1404	EA	6 Amperes, 24 Volt DC, 120 Volt AC, NAC Fire Alarm Power Supply (Notifier HPF24S6)	1,126.46	84.60
28 46 13 31-1405	EA	6 Amperes, 24 Volt DC, 220 Volt AC, NAC Fire Alarm Power Supply (Notifier HPF24S6E)	1,126.46	84.60
28 46 13 31-1406	EA	8 Amperes, 24 Volt DC, 120 Volt AC, NAC Fire Alarm Power Supply (Notifier HPF24S8)	1,222.63	84.60
28 46 13 31-1407	EA	8 Amperes, 24 Volt DC, 220 Volt AC, NAC Fire Alarm Power Supply (Notifier HPF24S8E)	1,222.63	84.60
28 46 13 31-1408	EA	6 Amperes, 24 Volt DC, 120 Volt AC, NAC Fire Alarm Power Supply (Notifier HPF602ULADA)	965.66	84.60
28 46 13 31-1409	EA	9 Amperes, 24 Volt DC, 120 Volt AC, NAC Fire Alarm Power Supply (Notifier HPF902ULADA)	1,153.51	84.60
28 46 13 31-1410	EA	Class A Adapter HPFF8/HPFF12 (Notifier HPP31076)	252.11	14.10
28 46 13 31-1411	EA	Up To 3 Amperes, Main Power Supply And Charger (Notifier MPS-24A)	1,574.10	28.20
28 46 13 31-1412	EA	Class A (Style Y) NAC Option Module For FCPS-2406 And FCPS-2408 (Notifier ZNAC-4)	218.87	28.20
28 46 13 31-1413	EA	240 Volt AC Addressable Power Supply (Notifier AMPS-24E)	1,765.76	28.20
28 46 13 31-1414	EA	6 Amperes, 120 Volt AC Auxiliary Power Supply (Notifier APS2-6R)	1,170.04	84.60
28 46 13 31-1415	EA	6 Amperes, 220-240 Volt AC Auxiliary Power Supply (Notifier APS2-6RE)	1,222.63	84.60
28 46 13 31-1416	EA	25 To 75 Ampere Hour Sealed Lead Acid Battery Charger (Notifier CHG-75)	1,162.43	28.20
28 46 13 31-1417	EA	6 Amperes, 240 Volt AC Remote Charger Power Supply (Notifier FCPS-24S6E)	1,124.96	84.60
28 46 13 31-1418	EA	6 Amperes, 120 Volt AC Remote Charger Power Supply (Notifier FCPS-24S6R)	1,096.40	84.60

28 46 13 31-1419 Network Control Annunciators *(28 46 13 31-1137)*

28 46 13 31-1420	EA	Network Control Annunciator For NFS2-3030, NFS-3030, NFS-320, NFS-640 And NFS2-640 (Notifier NCA-2)	2,781.61	84.60
28 46 13 31-1421	EA	Retro-Fit Plate For Mounting NCA2 (Notifier NCA-2RETRO)	98.75	16.92
28 46 13 31-1422	EA	Kit For Mounting NCA-2 To CHS-M2 (Notifier NCA/640-2-Kit)	68.67	16.92

28 46 13 31-1423 FIRSTVISION Firefighter's Display *(28 46 13 31-1137)*

28 46 13 31-1424	EA	ONYX Firstvision™ Touchscreen Assembly (Notifier FIRSTVISION-LCD)	21,255.37	564.00

28 46 13 31-1425 FlashScan Addressable Modules *(28 46 13 31-1137)*

28 46 13 31-1426	EA	Intelligent Addressable Control Module (Notifier FCM-1)	228.98	28.20
28 46 13 31-1427	EA	Addressable Dual Monitor Module (Notifier FDM-1)	257.48	28.20

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-1428	EA	Intelligent Addressable Monitor Module (Notifier FMM-1)	187.81	28.20
28 46 13 31-1429	EA	Intelligent Addressable Miniature Monitor Module (Notifier FMM-101)	165.65	28.20
28 46 13 31-1430	EA	Intelligent Addressable 4 - 20mA Analog Input Module (Notifier FMM-4-20)	357.22	28.20
28 46 13 31-1431	EA	Intelligent Addressable Relay Module (Notifier FRM-1)	183.69	28.20
28 46 13 31-1432	EA	Intelligent Addressable 2-Wire Detector Monitor Module (Notifier FZM-1)	292.31	28.20
28 46 13 31-1433	EA	SLC Loop Powered Fault Isolator Module (Notifier ISO-X)	184.65	28.20
28 46 13 31-1434		Addressable Device Bases And Accessories *(28 46 13 31-1137)*		
28 46 13 31-1435	EA	Intelligent Detector Base With Flange (Notifier B710LP)	62.12	14.10
28 46 13 31-1436	EA	Weatherproof Device Housing (Notifier DH400OE-1)	612.13	28.20
28 46 13 31-1437	EA	Detector Base For All Wireless Smoke And Heat Detectors (Notifier B210W)	57.38	14.10
28 46 13 31-1438	EA	Swift AV Base Ceiling (Notifier WAV-CRL)	324.53	14.10
28 46 13 31-1439	EA	Swift AV Base Wall (Notifier WAV-RL)	324.53	14.10
28 46 13 31-1440		XP6/XP10 Transponder *(28 46 13 31-1137)*		
28 46 13 31-1441	EA	Synchronization Daughter Module For XP6-C (Notifier SYNC-1)	164.85	28.20
28 46 13 31-1442	EA	Six Circuit Supervised Control Module (Notifier XP6-C)	886.04	28.20
28 46 13 31-1443	EA	Six Zone Intelligent To Conventional Interface Module (Notifier XP6-MA)	1,076.03	28.20
28 46 13 31-1444	EA	Six Relay Control Module (Notifier XP6-R)	851.21	28.20
28 46 13 31-1445	EA	Ten Input Monitor Module (Notifier XP10-M)	1,028.53	28.20
28 46 13 31-1446		LCD Display Annunciators *(28 46 13 31-1137)*		
28 46 13 31-1447	EA	80 Character LCD Fire Annunciator For FireWarden-100-2, NFS-640, NFS2-640 And NFS-320 (Notifier FDU-80)	1,111.25	84.60
28 46 13 31-1448	EA	80 Character LCD Annunciator For NFS-640, NFS-3030, NFS2-640, NFS2-3030 And NFS-320 (Notifier LCD-80)	1,578.32	84.60
28 46 13 31-1449	EA	640 Character LCD Annunciator For NFS-3030 And NFS2-3030 (Notifier LCD-160)	1,635.32	84.60
28 46 13 31-1450	EA	8 To 16 Switch Smoke Control Expander (Notifier SCE-8)	930.53	28.20
28 46 13 31-1451	EA	8 To 16 Switch Smoke Control Lamp Driver Expander (Notifier SCE-8L)	490.03	28.20
28 46 13 31-1452	EA	Eight Switch Smoke Control Master Module (Notifier SCS-8)	1,207.41	28.20
28 46 13 31-1453	EA	White, 80 Character Display, Remote LCD Annunciator (Notifier N-ANN-80-W)	782.33	84.60
28 46 13 31-1454		ONYX ACM And AEM Series LED Annunciators *(28 46 13 31-1137)*		
28 46 13 31-1455	EA	Remote, Eight Form C Relay Module (Notifier ACM-8R)	530.08	28.20
28 46 13 31-1456	EA	16 Alarm LEDs, 16 Trouble LEDs, 16 Controls Switches, Annunciator Control Module (Notifier ACM-16AT)	1,178.95	28.20
28 46 13 31-1457	EA	16 Alarm LEDs, 16 Trouble LEDs, 16 Control Switches, Annunciator Expander Module (Notifier AEM-16AT)	898.70	28.20
28 46 13 31-1458	EA	24 Alarm LEDs, 24 Trouble LEDs, 24 Control Switches, Annunciator Control Module (Notifier ACM-24AT)	1,178.95	28.20
28 46 13 31-1459	EA	24 Alarm LEDs, 24 Trouble LEDs, 24 Control Switches, Annunciator Expander Module (Notifier AEM-24AT)	898.70	28.20
28 46 13 31-1460	EA	32 Alarm LEDs And 1 Trouble LED, Control Module (Notifier ACM-32A)	898.70	28.20
28 46 13 31-1461	EA	32 Alarm And 1 Trouble LED, Annunciator Expander Module (Notifier AEM-32A)	803.71	28.20
28 46 13 31-1462	EA	48 Alarm And 1 Trouble LED Annunciator Control Module (Notifier ACM-48A)	898.70	28.20
28 46 13 31-1463	EA	48 Alarm And 1 Trouble LED, Annunciator Expander Module (Notifier AEM-48A)	803.71	28.20
28 46 13 31-1464		Graphic Annunciator - Lamp Driver Modules *(28 46 13 31-1137)*		
28 46 13 31-1465	EA	Single Annunciator Flush Mounted Back Box (Notifier ABF-1B)	343.96	56.40
28 46 13 31-1466	EA	Single Annunciator Flush Mounted Back Box With Glass Door And Key Lock (Notifier ABF-1DB)	377.21	56.40
28 46 13 31-1467	EA	Two Annunciator Flush Mounted Back Box (Notifier ABF-2B)	430.75	70.50
28 46 13 31-1468	EA	Two Annunciator Flush Mounted Back Box With Glass Door And Key Lock (Notifier ABF-2DB)	473.50	70.50
28 46 13 31-1469	EA	Four Annunciator Flush Mounted Back Box (Notifier ABF-4B)	770.55	98.70
28 46 13 31-1470	EA	Annunciator Blank Plate Used With ACM-32A/ACM-16AT (Notifier ABM-1)	137.54	16.92
28 46 13 31-1471	EA	Single Annunciator Surface Mounted Back Box (Notifier ABS-1B)	208.59	56.40
28 46 13 31-1472	EA	Single Annunciator Surface Mounted Back Box With Trim (Notifier ABS-1TB)	161.11	14.10
28 46 13 31-1473	EA	Two Annunciator Surface Mounted Back Box (Notifier ABS-2B)	269.54	56.40
28 46 13 31-1474	EA	12" x 12" x 3-3/4" Surface Or Semi-Flush Mount Back Box (Notifier ABS-2D)	495.66	70.50
28 46 13 31-1475	EA	Red, Surface (Or Semi-Flush) Mounted Back Box For ACS Annunciators, SCS Series, NCA And NCA-2 (Notifier ABS-2DR)	301.35	14.10
28 46 13 31-1476	EA	Black, 12" x 20" x 3-1/2" Surface Or Semi-Flush Back Box (Notifier ABS-4D)	813.30	98.70
28 46 13 31-1477	EA	Red, 12" x 20" x 3-1/2" Surface Or Semi-Flush Back Box (Notifier ABS-4DR)	508.19	16.92
28 46 13 31-1478	EA	Black, 9-15/16" x 4-5/8" x 2-1/2" Surface Back Box (Notifier ABS-8RB)	195.11	22.56
28 46 13 31-1479	EA	Annunciator Key Switch (Notifier AKS-1B)	114.46	8.46
28 46 13 31-1480	EA	Chassis Used To Mount NCA-2 In ABS-2D (Notifier CHS-2D)	123.69	28.20
28 46 13 31-1481	EA	32 Alarm Lamp Driver Annunciator Control Module (Notifier LDM-32)	803.71	28.20
28 46 13 31-1482	EA	24" Lamp Driver Annunciator Cable (Notifier LDM-CBL24)	202.93	5.64
28 46 13 31-1483	EA	48" Lamp Driver Annunciator Cable (Notifier LDM-CBL48)	254.41	5.64
28 46 13 31-1484	EA	32 Alarm Lamp Driver Annunciator Expander Module (Notifier LDM-E32)	659.63	28.20
28 46 13 31-1485	EA	Lamp Driver Module (Notifier LDM-R32)	988.88	28.20
28 46 13 31-1486	EA	Eight Switch Smoke Control Lamp Driver Master Module (Notifier SCS-8L)	916.80	28.20
28 46 13 31-1487	EA	48" Cable Assembly For Smoke Control Lamp Driver (Notifier SCS8L-CBL48)	261.28	5.64
28 46 13 31-1488	EA	Black, Trim Ring For ABS-2D Cabinet (Notifier TR-ABS2D)	232.35	16.92
28 46 13 31-1489	EA	Black, Trim Ring For ABS-4D Cabinet (Notifier TR-ABS4D)	117.98	16.92
28 46 13 31-1490	EA	Red, Trim Ring For ABS-4D Cabinet (Notifier TR-ABS4DR)	117.98	16.92
28 46 13 31-1491	EA	Graphic Annunciator Dress Plate (Notifier DP-GDIS1)	222.05	16.92
28 46 13 31-1492	EA	Graphic Annunciator Dress Plate (Notifier DP-GDIS2)	222.05	16.92
28 46 13 31-1493	EA	Input/Output Module For Driving Graphic Annunciators Or Relays (Notifier N-ANN-RLED)	597.03	28.20
28 46 13 31-1494		Network Gateways *(28 46 13 31-1137)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-1495	EA	Common Alerting Protocol Gateway (Notifier CAP-GW)	4,714.96	28.20
28 46 13 31-1496	EA	Fiber-Optic Cable Interface (Multi-Mode), High-Speed Network Communications Module (Notifier HS-NCM-MF)	3,500.73	28.20
28 46 13 31-1497	EA	Fiber-Optic Cable Interface (Multi-Mode Fiber To Single-Mode Fiber), High-Speed Network Communications Module (Notifier HS-NCM-MFSF)	3,948.55	28.20
28 46 13 31-1498	EA	Fiber-Optic Cable Interface (Single-Mode), High-Speed Network Communications Module (Notifier HS-NCM-SF)	4,354.29	28.20
28 46 13 31-1499	EA	Twisted-Pair Wire Interface, High-Speed Network Communications Module (Notifier HS-NCM-W)	3,532.28	28.20
28 46 13 31-1500	EA	Wire And Fiber-Optic Cable Interface, High-Speed Network Communications Module (Multi-Mode) (Notifier HS-NCM-WMF)	3,436.11	28.20
28 46 13 31-1501	EA	Wire And Fiber-Optic Cable Interface (Single-Mode), High-Speed Network Communications Module (Notifier HS-NCM-WSF)	3,873.41	28.20
28 46 13 31-1502	EA	Modbus Gateway (Notifier MODBUS-GW)	3,858.38	28.20
28 46 13 31-1503	EA	22" Widescreen HD LED Color Monitor With Speakers (Notifier MON-22LCDW)	4,462.51	18.61
28 46 13 31-1504	EA	Capacitive Touch-Screen, 22" Widescreen HD LED Color Monitor With Speakers (Notifier MON-22LCDW-TS)	6,656.54	18.61
28 46 13 31-1505	EA	1920x1080P Wide Screen (Notifier MON-42LCDW)	21,188.23	18.61
28 46 13 31-1506	EA	Single Monitor, Wall Mounted, Horizontal, Tilt, Bracket (Notifier MON-42HORZ-SD)	621.14	42.30
28 46 13 31-1507	EA	Single Monitor, Vertical Mounted, Bracket (Notifier MON-42VERT-SD)	1,139.38	42.30
28 46 13 31-1508	EA	Dual Monitors, Vertical Wall Mounted, Fixed Position, Bracket (Notifier MON-42VERT-DD)	1,663.72	42.30
28 46 13 31-1509	EA	Mass Notification Voice Paging (Notifier NOTIFY-IP)	1,779.27	
28 46 13 31-1510	EA	Embedded NFN Gateway (Notifier NFN-GW-EM)	3,444.62	28.20
28 46 13 31-1511	EA	NFN Gateway PC Card With Fiber (Notifier NFN-GW-PC-F)	3,444.62	28.20
28 46 13 31-1512	EA	High Speed NFN Gateway PC Card For Multimode Fiber (Included With ONYXworks-HNMF) (Notifier NFN-GW-PC-HNMF)	5,361.14	28.20
28 46 13 31-1513	EA	High Speed NFN Gateway PC Card For Single Mode Fiber (Included With ONYXworks-HNSF) (Notifier NFN-GW-PC-HNSF)	6,247.77	28.20
28 46 13 31-1514	EA	High Speed NFN Gateway PC Card For Wire (Included With ONYXworks-HNW) (Notifier NFN-GW-PC-HNW)	5,361.14	28.20
28 46 13 31-1515	EA	NFN Gateway PC Card With Wire (Notifier NFN-GW-PC-W)	3,444.62	28.20
28 46 13 31-1516	EA	Alpha-Numeric Pager Option For ONYXworks (Notifier ONYX-PAGER)	1,463.28	
28 46 13 31-1517	EA	ONYXWorks Workstation (Notifier ONYXWORKS-WS)	38,502.95	676.80
28 46 13 31-1518	EA	Fiber Network Graphical User Interface (Notifier ONYXWorks-Lite OW-LITE-NW) Note: Includes PC slot network fiber card, workstation software and security key with a four node license. Excludes PC workstation.	5,800.00	
28 46 13 31-1519	EA	Wired Network Graphical User Interface (Notifier ONYXWorks-Lite OW-LITE-NF) Note: Includes PC slot network fiber card, workstation software and security key with a four node license. Excludes PC workstation.	5,800.00	
28 46 13 31-1520	EA	Fiber Optics, Standard Network Repeater Board (Notifier RPT-F)	1,619.27	28.20
28 46 13 31-1521	EA	Wire, Standard Network Repeater Board (Notifier RPT-W)	1,314.21	28.20
28 46 13 31-1522	EA	Wire To Fiber Optics, Standard Network Repeater Board (Notifier RPT-WF)	1,568.18	28.20
28 46 13 31-1523	EA	Signaling Line Circuit Integration Module (Notifier SLC-IM)	1,753.02	28.20
28 46 13 31-1524	EA	VESDA Gateway That Provides A Communication Link Between The Noti-Fire-Net™ Network And Vesda™ Detectors On The Vesdanet™ (Notifier VESDA-HLI-GW)	3,678.05	28.20
28 46 13 31-1525	EA	Vesda™ High Level Interface Card Used With SLC-IM And Vesda-HLI-GW To Provide A Communication Link Between The Noti-Fire-Net™ Network And Vesda™ Detectors On The Vesdanet™ (Notifier VHX-1420-HFS)	2,202.54	28.20
28 46 13 31-1526	EA	Windows Hard Drive Upgrade (Notifier WIN7-UG-US-3)	2,438.80	
28 46 13 31-1527	EA	Intuitive Color 10" Touch Screen Providing Color Coded Information Of Detailed System Status (Notifier NCD)	2,247.44	18.61
28 46 13 31-1528	EA	SWIFT Wireless Gateway With Flashscan (Notifier FWSG)	513.02	28.20
28 46 13 31-1529		**NOTI-FIRE-NET Network Components** *(28 46 13 31-1137)*		
28 46 13 31-1530	EA	Interface Between NOTI-FIRE-NET 50 And BACnet (Notifier BACNET-GW-3)	3,444.62	28.20
28 46 13 31-1531	EA	Fiber Optic Network Communications Module (Notifier NCM-F)	1,524.10	28.20
28 46 13 31-1532	EA	NOTI-FIRE-NET Web Server (Notifier NWS)	3,444.62	28.20
28 46 13 31-1533	EA	Wired Network Communications Module (Notifier NCM-W)	1,451.27	28.20
28 46 13 31-1534	EA	Fiber Optic Converter Module Mounting Kit (Notifier SMF-Kit)	138.90	14.10
28 46 13 31-1535		**FireWarden Addressable Fire Panels** *(28 46 13 31-1137)*		
28 46 13 31-1536	EA	50 Point, Addressable Fire Alarm Control Panel With Digital Alarm Communicator/Transmitter (Notifier NFW-50)	2,640.03	564.00
28 46 13 31-1537	EA	Black, One SLC Loop, 120 Volt AC, 198 Point Addressable Fire Alarm Control Panel With Digital Alarm Communicator/Transmitter (Notifier NFW2-100)	3,202.10	564.00
28 46 13 31-1538	EA	Black, One DC Loop, 120 Volt AC, 198 Point Addressable Fire Alarm Control Panel With Digital Alarm Communicator/Transmitter (Notifier NFW2-100C)	3,691.71	282.00
28 46 13 31-1539	EA	Black, One SLC Loop, 240 Volt AC, 198 Point Addressable Fire Alarm Control Panel With Digital Alarm Communicator/Transmitter (Notifier NFW2-100E)	3,691.71	282.00
28 46 13 31-1540	EA	Red, One SLC Loop, 120 Volt AC, 198 Point Addressable Fire Alarm Control Panel With Digital Alarm Communicator/Transmitter (Notifier NFW2-100R)	3,673.68	282.00
28 46 13 31-1541	EA	Black, Built In Digital Alarm Communicator/Transmitter (DACT) With Modem For Remote Upload/Download, Built In Annunciator, 50 Point Addessable Fire Alarm Control Panel (Notifier NFW-50C)	4,289.81	564.00
28 46 13 31-1542	EA	Red, Built In Digital Alarm Communicator/Transmitter (DACT) With Modem For Remote Upload/Download, 50 Point Addessable Fire Alarm Control Panel (NFW-50R)	2,943.33	564.00
28 46 13 31-1543		**FireWarden Accessories** *(28 46 13 31-1137)*		
28 46 13 31-1544	EA	Intelligent Multicriteria Photo/Thermal Detector With Base (Notifier NP-A100)	219.61	42.30
28 46 13 31-1545	EA	Intelligent Addressable Photo/Thermal Detector With Base (Notifier NP-100T)	208.17	42.30
28 46 13 31-1546		**FireWarden Devices** *(28 46 13 31-1137)*		
28 46 13 31-1547	EA	SLC Loop Powered Fault Isolator Module (Notifier N100-ISO)	183.06	28.20
28 46 13 31-1548	EA	Intelligent Addressable Control Module (Notifier NC-100)	221.06	28.20
28 46 13 31-1549	EA	Intelligent Addressable Relay Module (Notifier NC-100R)	211.56	28.20
28 46 13 31-1550	EA	Intelligent Addressable Low Flow Duct Photoelectric Smoke Detector (Notifier ND-100)	493.49	42.30
28 46 13 31-1551	EA	Intelligent Addressable Low Flow Duct Photoelectric Smoke Detector With DPDT Relay (Notifier ND-100R)	600.62	42.30

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-1552	EA	Two Zone Intelligent Addressable, Two Wire Detector Monitor Module (Notifier NDM-100)	211.56	28.20
28 46 13 31-1553	EA	Intelligent Addressable Thermal Detector With Base (Notifier NH-100)	208.10	42.30
28 46 13 31-1554	EA	Intelligent Addressable High Temperature Thermal Detector With Base (Notifier NH-100H)	208.10	42.30
28 46 13 31-1555	EA	Intelligent Addressable Rate-Of-Rise Thermal Detector With Base (Notifier NH-100R)	208.10	42.30
28 46 13 31-1556	EA	Intelligent Addressable Ionization Smoke Detector With Base (Notifier NI-100)	290.43	42.30
28 46 13 31-1557	EA	Intelligent Addressable Monitor Module (Notifier NMM-100)	179.90	28.20
28 46 13 31-1558	EA	Intelligent Addressable Mini Monitor Module (Notifier NMM-100P)	161.69	28.20
28 46 13 31-1559	EA	Intelligent Addressable Manual Pull Station (Notifier NOT-BG12LX)	250.35	28.20
28 46 13 31-1560	EA	Intelligent Addressable Photoelectric Smoke Detector With Base (Notifier NP-100)	219.18	42.30
28 46 13 31-1561	EA	Intelligent Addressable 2-Wire Detector Monitor Module (Notifier NZM-100)	282.81	28.20
28 46 13 31-1562	EA	Six Zone Intelligent Addressable 2-Wire Detector Monitor Module (Notifier NZM-100-6)	1,050.70	28.20
28 46 13 31-1563		**SFP-2402 And SFP-2404 2 And 4-Zone Control Panels And Accessories** *(28 46 13 31-1137)*		
28 46 13 31-1564	EA	120 Volt AC, Two Zone Conventional Fire Alarm Control Panel (Notifier SFP-2402)	1,694.05	451.20
28 46 13 31-1565	EA	120 Volt AC, Four Zone Conventional Fire Alarm Control Panel (Notifier SFP-2404)	1,898.29	451.20
28 46 13 31-1566	EA	240 Volt AC, Two Zone Conventional Fire Alarm Control Panel (Notifier SFP-2402E)	1,486.69	141.01
28 46 13 31-1567	EA	240 Volt AC, Four Zone Conventional Fire Alarm Control Panel (Notifier SFP-2404E)	1,725.63	141.01
28 46 13 31-1568	EA	Class A Converter Module (Notifier CAC-4)	437.40	28.20
28 46 13 31-1569	EA	Internal Dress Plate, Required For FM And ULC (Notifier DP-4X)	157.69	16.92
28 46 13 31-1570	EA	Remote Zone Annunciator (Notifier RZA-4X)	225.33	42.30
28 46 13 31-1571	EA	Red, Dress Panel (Notifier DP-51050)	191.16	16.92
28 46 13 31-1572	EA	Black, Dress Panel (Notifier DP-51050B)	193.45	16.92
28 46 13 31-1573		**SFP-5UD 5 Zone Control Panels And Accessories** *(28 46 13 31-1137)*		
28 46 13 31-1574	EA	120 Volt AC, Five Zone Conventional Fire Alarm Control Panel (Notifier SFP-5UD)	2,703.36	564.00
28 46 13 31-1575	EA	120 Volt AC, Five Zone Conventional Fire Alarm Control Panel (Notifier SFB-5UDC)	3,810.27	423.01
28 46 13 31-1576	EA	240 Volt AC, Five Zone Conventional Fire Alarm Control Panel (Notifier SFB-5UDE)	2,514.63	282.00
28 46 13 31-1577	EA	Red, 120 Volt AC, Five Zone Conventional Fire Alarm Control Panel (Notifier SFB-5UDR)	2,514.63	282.00
28 46 13 31-1578	EA	Class A Converter Module (Notifier N-CAC-5X)	453.42	28.20
28 46 13 31-1579	EA	Red, Trim Ring For NFW2-100, NFW-50, SFB-5UD, SFB-10UD, RP-2001, RP-2002 Cabinet (Notifier TR-CE)	171.14	16.92
28 46 13 31-1580	EA	Five Zone Conventional Fire Control Panel With DACT And 7 Amperes Power Supply, ULC/UL Listed (Notifier SFP-5UDC) Note: Includes internal dress panel with built-in annunciator module	4,458.58	423.01
28 46 13 31-1581	EA	240 Volt AC, Five Zone Conventional Fire Control Panel With DACT And 3 Amperes Power Supply (Notifier SFP-5UDE)	2,949.35	282.00
28 46 13 31-1582	EA	Red, 120 Volt AC, Five Zone Conventional Fire Control Panel Wth DACT And 3 Amperes Power Supply (Notifier SFP-5UDR)	2,917.79	282.00
28 46 13 31-1583		**SFP-10UD 10 Zone Control Panels And Accessories** *(28 46 13 31-1137)*		
28 46 13 31-1584	EA	120 Volt AC, 10 Zone Conventional Fire Alarm Control Panel With Built-In Digital Alarm Communicator Transmitter (Notifier SFB-10UDC)	4,646.03	564.00
28 46 13 31-1585	EA	240 Volt AC, 10 Zone Conventional Fire Alarm Control Panel With Built-In Digital Alarm Communicator Transmitter (Notifier SFB-10UDE)	3,474.41	423.01
28 46 13 31-1586	EA	120 Volt AC, 10 Zone Conventional Fire Alarm Control Panel With Built-In Digital Alarm Communicator Transmitter (Notifier SFP-10UD)	3,146.68	564.00
28 46 13 31-1587	EA	Red, 120 Volt AC, 10 Zone Conventional Fire Alarm Control Panel With Built-In Digital Alarm Communicator Transmitter (Notifier SFB-10UDR)	4,038.42	564.00
28 46 13 31-1588	EA	Four Channel, Dual Line, Stand-Alone Fire Alarm Communicator (Fire-Lite 411UDAC)	846.84	84.60
28 46 13 31-1589	EA	10 Zone Conventional Fire Control Panel With DACT And 7 Amperes Power Supply, ULC/UL Listed (Notifier SFP-10UDC) Note: Includes internal dress panel with built-in annunciator module	5,384.76	564.00
28 46 13 31-1590	EA	240 Volt AC, 10 Zone Conventional Fire Control Panel With DACT And 7 Amperes Power Supply (Notifier SFP-10UDE)	4,012.26	423.01
28 46 13 31-1591	EA	Red, 10 Zone Conventional Fire Control Panel With DACT And 7 Amperes Power Supply (Notifier SFP-10UDR)	4,538.70	564.00
28 46 13 31-1592		**Smoke Detectors** *(28 46 13 31-1137)*		
28 46 13 31-1593	EA	Low Profile Intelligent Addressable Ionization Smoke Detector (Notifier FSI-851)	312.59	42.30
28 46 13 31-1594	EA	Intelligent Addressable Laser Smoke Detector (Notifier FSL-751)	543.75	42.30
28 46 13 31-1595	EA	Intelligent Addressable Laser Duct Smoke Detector (Notifier FSL-751D)	1,513.02	42.30
28 46 13 31-1596	EA	Remote Test Capable Intelligent Addressable Photo Detector (Notifier NP-100R) Note: For use with DNR(W) duct detector housing.	195.58	42.30
28 46 13 31-1597	EA	Filters For Harsh Detector (Notifier RF-FTX)	23.68	
28 46 13 31-1598	EA	Key Activated Remote Test Station For Duct Smoke Detector (Notifier RTS151KEY)	187.42	28.20
28 46 13 31-1599	EA	Addressable Beam Detector With Reflector, UL Listed (Notifier FS-OSI-RI)	2,558.14	42.30
28 46 13 31-1600	EA	Intelligent Addressable Photo Detector With Flashscan, White (Notifier FSP-951)	203.88	42.30
28 46 13 31-1601	EA	Intelligent Addressable Photo Detector With Flashscan And Clip, Ivory (Notifier FSP-951-IV)	222.76	42.30
28 46 13 31-1602	EA	Remote Test Capable Intelligent Photo Detector With Flashscan, White (Notifier FSP-951R)	213.32	42.30
28 46 13 31-1603	EA	Remote Test Capable Intelligent Photo Detector With Flashscan And Clip, Ivory (Notifier FSP-951R-IV)	230.48	42.30
28 46 13 31-1604	EA	Intelligent Addressable Photo/Thermal Detector With Flashscan, White (Notifier FSP-951T)	214.46	42.30
28 46 13 31-1605	EA	Intelligent Addressable Photo/Thermal Detector With Flashscan, Ivory (Notifier FSP-951T-IV)	231.62	42.30
28 46 13 31-1606	EA	Intelligent Addressable 135 Degree Thermal Detector With Flashscan, White (Notifier FST-951)	173.84	42.30
28 46 13 31-1607	EA	Intelligent Addressable High Temperature 190 Degree Heat Detector With Flashscan (Notifier FST-951H)	173.84	42.30
28 46 13 31-1608	EA	Intelligent Addressable High Temperature 190 Degree Heat Detector With Flashscan And Clip, Ivory (Notifier FST-951H-IV)	189.86	42.30
28 46 13 31-1609	EA	Intelligent Addressable 135 Degree Thermal Detector With Flashscan And Clip, Ivory (Notifier FST-951-IV)	189.86	42.30
28 46 13 31-1610	EA	Intelligent Addressable Rate-of-Rise Thermal Detector With Flashscan, White (Notifier FST-951R)	173.84	42.30
28 46 13 31-1611	EA	Intelligent Addressable Rate-of-Rise Thermal Detector With Flashscan And Clip, Ivory (Notifier FST-951R-IV)	189.86	42.30

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-1612	EA	Low Profile Intelligent Addressable High Sensitivity Detector With Flashscan, White (Notifier FSV-951R)	471.32	42.30
28 46 13 31-1613	EA	Low Profile Intelligent Addressable High Sensitivity Detector With Flashscan, Ivory (Notifier FSV-951R-IV)	505.65	42.30
28 46 13 31-1614	EA	Wireless Photo-Heat Detector, Acclimate, With Flashscan (Notifier FWD-200ACCLIMATE) Note: Requires B210W base, ordered separately	470.18	42.30
28 46 13 31-1615	EA	Wireless Photo Detector With Flashscan (Notifier FWD-200P) Note: Requires B210W base, ordered separately	432.42	42.30
28 46 13 31-1616	EA	Wireless Fixed Temp Heat Detector, 135 Degree, With Flashscan (Notifier FWH-200FIX135) Note: Requires B210W base, ordered separately	392.38	42.30
28 46 13 31-1617	EA	Wireless ROR Heat Detector, 135 Degree, With Flashscan (Notifier FWH-200ROR135) Note: Requires B210W base, ordered separately	392.38	42.30
28 46 13 31-1618	EA	Intelligent Addressable Carbon Monoxide Detector With Flashscan (Notifier FPC-951)	284.83	42.30
28 46 13 31-1619	EA	Built In Circular Display, 3 Alarm Levels, Smoke Detector (Notifier VLF-250) Note: Use for areas up to 2,500 square feet. Adjustable sensitivity range is 0.008 - 6% ro 6.4 /Ft. Obs.	3,957.21	42.30
28 46 13 31-1620	EA	Built In Circular Display, 3 Alarm Levels, Smoke Detector (Notifier VLF-500) Note: Use for areas up to 2,500 square feet. Adjustable sensitivity range is 0.008 - 6% ro 6.4 /Ft. Obs.	4,859.02	42.30

28 46 13 31-1621 Pull Stations *(28 46 13 31-1137)*

28 46 13 31-1622	EA	Trim Ring For NBG12 Series Pull Station (Notifier BG12TR)	35.08	5.64
28 46 13 31-1623	EA	One End Tapped For 1/2" Conduit, Aluminum, Surface Mounted Back Box (Notifier BG-2)	78.37	14.10
28 46 13 31-1624	EA	Red, One End Tapped For 1/2" Conduit, Aluminum, Surface Mounted Back Box (Notifier BG-2R)	75.80	14.10
28 46 13 31-1625	EA	Red Letters, Spring Retainer, Aluminum Single Action Pull Station (Notifier BNG-1)	104.48	28.20
28 46 13 31-1626	EA	DPDT Switch, Red Letters, Spring Retainer, Aluminum Single Action Pull Station (Notifier BNG-1F)	114.93	28.20
28 46 13 31-1627	EA	Terminal Switch, DPDT Switch, Red Letters, Spring Retainer, Aluminum Single Action Pull Station (Notifier BNG-1FTS)	156.04	28.20
28 46 13 31-1628	EA	Red Body, Silver Letters, Spring Retainer, Aluminum Single Action Pull Station (Notifier BNG-1R)	104.48	28.20
28 46 13 31-1629	EA	Red Letters, Spring Retainer, Aluminum Single Action Pull Station With Terminal Strip (Notifier BNG-1TS)	119.81	28.20
28 46 13 31-1630	EA	Standard Local Style Red Letters, Spring Retainer, Aluminum Single Action Pull Station With Terminal Strip (Notifier BNG-1TSL)	119.81	28.20
28 46 13 31-1631	EA	Terminal Strip, Red Body, Red Letters, Spring Retainer, Aluminum Single Action Pull Station (Notifier BNG-1TSR)	119.81	28.20
28 46 13 31-1632	EA	Red Letters, Breakglass, Aluminum Single Action Pull Station (Notifier BRG-1)	113.54	28.20
28 46 13 31-1633	EA	Red Body, Silver Letters, Breakglass, Aluminum Single Action Pull Station (Notifier BRG-1R)	122.60	28.20
28 46 13 31-1634	EA	Hazardous, Non-Hazardous, Weatherproof, Harsh Locations Fire Alarm Pull Station (Notifier HAZ-WP-PULL)	1,293.93	33.84
28 46 13 31-1635	EA	Red, Single Action Fire Alarm Pull Station (Notifier NBG-12S)	98.85	28.20
28 46 13 31-1636	EA	Red, Dual Action Fire Alarm Pull Station (Notifier NBG-12)	103.77	28.20
28 46 13 31-1637	EA	Red, Key Lock, Dual Action Fire Alarm Pull Station (Notifier NBG-12L)	121.71	28.20
28 46 13 31-1638	EA	Red, Outdoor, Key Lock, Dual Action Fire Alarm Pull Station (Notifier NBG-12LOB)	297.26	33.84
28 46 13 31-1639	EA	Red, Presignal, Key Lock, Dual Action Fire Alarm Pull Station (Notifier NBG-12LPS)	157.94	28.20
28 46 13 31-1640	EA	Red, Agent Releasing, Key Lock, Dual Action Fire Alarm Pull Station (Notifier NBG-12LR)	131.91	28.20
28 46 13 31-1641	EA	Addressable Manual Dual Action Fire Alarm Pull Station (Notifier NBG-12LX)	251.94	28.20
28 46 13 31-1642	EA	Pull Station Trim Plate For New York City, For Use With All NBG Series Pull Stations (Notifier NY-PLATE)	57.27	5.64
28 46 13 31-1643	EA	Dual Action, Wireless Pull Station (Notifier NBG-12WL)	462.41	33.84

28 46 13 31-1644 Rate Compensation Heat Detectors *(28 46 13 31-1137)*

28 46 13 31-1645	EA	135 Degree F Explosion Proof Rate Compensation Heat Detectors (Edwards Signaling 302-EPM-135)	223.93	42.30
28 46 13 31-1646	EA	194 Degree F Explosion Proof Rate Compensation Heat Detectors (Edwards Signaling 302-EPM-194)	223.93	42.30

28 46 13 31-1647 FM Series Door Releases *(28 46 13 31-1137)*

28 46 13 31-1648	EA	1/2" Door Holder Spacer (Notifier FM900-50)	35.92	8.46
28 46 13 31-1649	EA	3/4" Door Holder Spacer (Notifier FM900-75)	35.92	8.46
28 46 13 31-1650	EA	1" Door Holder Spacer (Notifier FM900-100)	35.92	8.46
28 46 13 31-1651	EA	Door Holder Extension Kit (Notifier FM900)	38.29	8.46
28 46 13 31-1652	EA	90 Degree Door Holder Extension Kit (Notifier FM900-Z)	39.09	8.46
28 46 13 31-1653	EA	12 Volt DC, 24 Volt AC/DC Or 120 Volt AC, Floor Mounted, Door Holder (Notifier FM980)	252.23	42.30
28 46 13 31-1654	EA	12 Volt DC, 24 Volt AC/DC Or 120 Volt AC, Surface Mounted, Door Holder (Notifier FM996)	217.60	42.30
28 46 13 31-1655	EA	12 Volt DC, 24 Volt AC/DC Or 120 Volt AC, Recessed Mounted, Concealed Wiring, Door Holder (Notifier FM998)	217.60	42.30

28 46 13 31-1656 Multicriteria Fire Detector *(28 46 13 31-1137)*

28 46 13 31-1657	EA	Intelligent Addressable Combination Multi-Criteria Fire/Carbon Monoxide Detector With Flashscan (Notifier FCO-851)	342.03	42.30
28 46 13 31-1658	EA	Intelligent Addressable Multicriteria Fire Detector (Notifier FSC-851) Note: Detects fire, thermal, photo, CO and IR, with Flashscan.	340.89	42.30
28 46 13 31-1659	EA	Multi-Criteria Photo/Temp/Infrared Detector, White (Notifier FPTI-951)	219.61	42.30
28 46 13 31-1660	EA	Multi-Criteria Photo/Temp/Infrared Detector, Ivory (Notifier FPTI-951-IV)	227.62	42.30
28 46 13 31-1661	EA	Intelligent Addressable Combination Multi-Criteria Photoelectric And Carbon Monoxide Detector With Flashscan (Notifier FSCO-951)	342.03	42.30

28 46 13 31-1662 Modules *(28 46 13 31-1137)*

28 46 13 31-1663	EA	Intelligent Addressable Dual Monitor/Dual Relay Module (Notifier FDRM-1)	412.23	28.20
28 46 13 31-1664	EA	Addressable Firephone Control Module (Notifier FTM-1)	253.19	28.20
28 46 13 31-1665	EA	Wireless Monitor Module With Flashscan (Notifier FW-MM)	398.50	28.20
28 46 13 31-1666	EA	Wireless Relay Module With Flashscan (Notifier FW-RM)	461.43	28.20
28 46 13 31-1667	EA	Wireless Sync Module (Notifier W-SYNC)	601.90	28.20

28 46 13 31-1668 DH Series Door Releases *(28 46 13 31-1137)*

28 46 13 31-1669	EA	Semi-Flush, Powder Coated Chrome, Electromagnetic Door Holder (Notifier DH24120FPC)	207.88	42.30

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-1670	EA	Semi-Flush, Plated Brass, Electromagnetic Door Holder (Notifier DH24120FB)	221.90	42.30
28 46 13 31-1671	EA	Semi-Flush, Powder Coated Dark Bronze, Electromagnetic Door Holder (Notifier DH24120FD)	235.06	42.30
28 46 13 31-1672	EA	Surface Mounted, Powder Coated Chrome, Electromagnetic Door Holder (Notifier DH24120SPC)	231.62	42.30
28 46 13 31-1673	EA	Surface Mounted, Plated Brass, Electromagnetic Door Holder (Notifier DH24120SB)	243.06	42.30
28 46 13 31-1674	EA	Surface Mounted, Powder Coated Dark Bronze, Electromagnetic Door Holder (Notifier DH24120SPD)	252.79	42.30
28 46 13 31-1675	EA	Recessed, Powder Coated Chrome, Electromagnetic Door Holder (Notifier DH24120WPC)	207.88	42.30
28 46 13 31-1676	EA	Recessed, Plated Brass, Electromagnetic Door Holder (Notifier DH24120WB)	220.18	42.30
28 46 13 31-1677	EA	Recessed, Powder Coated Dark Bronze, Electromagnetic Door Holder (Notifier DH24120WD)	235.06	42.30
28 46 13 31-1678	EA	Floor Mounted, Single Door, Powder Coated Chrome, Electromagnetic Door Holder (Notifier DH24120GPC1)	266.52	42.30
28 46 13 31-1679	EA	Floor Mounted, Single Door, Plated Brass, Electromagnetic Door Holder (Notifier DH24120GB1)	284.83	42.30
28 46 13 31-1680	EA	Floor Mounted, Single Door, Powder Coated Dark Bronze, Electromagnetic Door Holder (Notifier DH24120GPD1)	305.99	42.30
28 46 13 31-1681	EA	Floor Mounted, Double Door, Powder Coated Chrome, Electromagnetic Door Holder (Notifier DH24120GPC2)	311.14	42.30
28 46 13 31-1682	EA	Floor Mounted, Double Door, Plated Brass, Electromagnetic Door Holder (Notifier DH24120GB2)	332.88	42.30
28 46 13 31-1683	EA	Floor Mounted, Double Door, Powder Coated Dark Bronze, Electromagnetic Door Holder (Notifier DH24120GPD2)	359.20	42.30
28 46 13 31-1684	EA	0.5" Extension Rod, Powder Coated Chrome, Electromagnetic Door Holder Extension (Notifier DHE.5PC)	23.81	5.64
28 46 13 31-1685	EA	0.5" Extension Rod, Plated Brass, Electromagnetic Door Holder Extension (Notifier DHE.5B)	23.81	5.64
28 46 13 31-1686	EA	0.5" Extension Rod, Powder Coated Dark Bronze, Electromagnetic Door Holder Extension (Notifier DHE.5D)	26.15	5.64
28 46 13 31-1687	EA	1" Extension Rod, Powder Coated Chrome, Electromagnetic Door Holder Extension (Notifier DHE1PC)	23.81	5.64
28 46 13 31-1688	EA	1" Extension Rod, Plated Brass, Electromagnetic Door Holder Extension (Notifier DHE1B)	23.81	5.64
28 46 13 31-1689	EA	1" Extension Rod, Powder Coated Dark Bronze, Electromagnetic Door Holder Extension (Notifier DHE1D)	26.15	5.64
28 46 13 31-1690	EA	1.5" Extension Rod, Powder Coated Chrome, Electromagnetic Door Holder Extension (Notifier DHE1.5PC)	25.01	5.64
28 46 13 31-1691	EA	1.5" Adjustable Extension Rod, Powder Coated Chrome, Electromagnetic Door Holder Extension (Notifier DHE1.5APC)	25.01	5.64
28 46 13 31-1692	EA	1.5" Extension Rod, Plated Brass, Electromagnetic Door Holder Extension (Notifier DHE1.5B)	26.15	5.64
28 46 13 31-1693	EA	1.5" Extension Rod, Powder Coated Dark Bronze, Electromagnetic Door Holder Extension (Notifier DHE1.5D)	27.47	5.64
28 46 13 31-1694	EA	2" Extension Rod, Powder Coated Chrome, Electromagnetic Door Holder Extension (Notifier DHE2PC)	27.47	5.64
28 46 13 31-1695	EA	2" Adjustable Extension Rod, Powder Coated Chrome, Electromagnetic Door Holder Extension (Notifier DHE2APC)	27.47	5.64
28 46 13 31-1696	EA	2" Extension Rod, Plated Brass, Electromagnetic Door Holder Extension (Notifier DHE2B)	28.67	5.64
28 46 13 31-1697	EA	2" Extension Rod, Powder Coated Dark Bronze, Electromagnetic Door Holder Extension (Notifier DHE2D)	28.67	5.64
28 46 13 31-1698	EA	3" Extension Rod, Powder Coated Chrome, Electromagnetic Door Holder Extension (Notifier DHE3PC)	28.67	5.64
28 46 13 31-1699	EA	3" Extension Rod, Plated Brass, Electromagnetic Door Holder Extension (Notifier DHE3B)	29.99	5.64
28 46 13 31-1700	EA	3" Extension Rod, Powder Coated Dark Bronze, Electromagnetic Door Holder Extension (Notifier DHE3D)	29.99	5.64
28 46 13 31-1701	EA	4" Extension Rod, Powder Coated Chrome, Electromagnetic Door Holder Extension (Notifier DHE4PC)	31.19	5.64
28 46 13 31-1702	EA	4" Adjustable Extension Rod, Powder Coated Chrome, Electromagnetic Door Holder Extension (Notifier DHE4APC)	31.19	5.64
28 46 13 31-1703	EA	4" Adjustable Extension Rod, Plated Brass, Electromagnetic Door Holder Extension (Notifier DHE4AB)	32.50	5.64
28 46 13 31-1704	EA	4" Adjustable Extension Rod, Powder Coated Dark Bronze, Electromagnetic Door Holder Extension (Notifier DHE4AD)	36.22	5.64
28 46 13 31-1705	EA	5" Extension Rod, Powder Coated Chrome, Electromagnetic Door Holder Extension (Notifier DHE5PC)	34.96	5.64
28 46 13 31-1706	EA	5" Extension Rod, Plated Brass, Electromagnetic Door Holder Extension (Notifier DHE5B)	33.71	5.64
28 46 13 31-1707	EA	5" Extension Rod, Powder Coated Dark Bronze, Electromagnetic Door Holder Extension (Notifier DHE5D)	36.22	5.64
28 46 13 31-1708	EA	Catch Plate, Powder Coated Chrome For Electromagnetic Door Holder (Notifier DHCPC)	33.11	8.46
28 46 13 31-1709	EA	Catch Plate, Plated Brass For Electromagnetic Door Holder (Notifier DHCPB)	34.31	8.46
28 46 13 31-1710	EA	Catch Plate, Powder Coated Dark Bronze For Electromagnetic Door Holder (Notifier DHCPD)	38.14	8.46
28 46 13 31-1711	EA	Swivel Base, Powder Coated Chrome, For Electromagnetic Door Holder (Notifier DHSBPC)	63.03	8.46
28 46 13 31-1712	EA	Swivel Base, Plated Brass, For Electromagnetic Door Holder (Notifier DHSBB)	66.69	8.46
28 46 13 31-1713	EA	Swivel Base, Powder Coated Dark Bronze, For Electromagnetic Door Holder (Notifier DHSBD)	70.35	8.46
28 46 13 31-1714	EA	Surface Mounted Back Box, Powder Coated Chrome For Electromagnetic Door Holder (Notifier DHBBPC)	56.80	14.10
28 46 13 31-1715	EA	Surface Mounted Back Box, Plated Brass For Electromagnetic Door Holder (Notifier DHBBB)	59.32	14.10
28 46 13 31-1716	EA	Surface Mounted Back Box, Powder Coated Dark Bronze For Electromagnetic Door Holder (Notifier DHBBD)	64.36	14.10
28 46 13 31-1717	EA	Swivel Base Mounting Drill Fixture For Electromagnetic Door Holder (Notifier DHDF)	353.54	

28 46 13 31-1718 First Command *(28 46 13 31-1137)*

28 46 13 31-1719	EA	Black, 120 Volt AC, 50 Watt, 25 VRMS, One Class A/B Speaker Circuit, Primary Operating Console (Notifier NFC-50/100)	7,734.04	705.01
28 46 13 31-1720	EA	Black, 220-240 Volt AC, 50 Watt, 25 VRMS, One Class A/B Speaker Circuit, Primary Operating Console (Notifier NFC-50/100E)	7,824.20	705.01
28 46 13 31-1721	EA	Black, 120 Volt AC, 50 Watt, 25 VRMS Or 70 VRMS), Four Class A/B Speaker Circuits, Distributed (Remote) Audio Amplifier (Notifier NFC-50DA)	2,418.13	56.40
28 46 13 31-1722	EA	Black, 220-240 Volt AC, 50 Watt, 25 VRMS Or 70 VRMS), Four Class A/B Speaker Circuits, Distributed (Remote) Audio Amplifier (Notifier NFC-50DAE)	2,485.75	56.40
28 46 13 31-1723	EA	Black, 120 Volt AC, 125 Watt, 25 VRMS, Four Class A/B Speaker Outputs, Distributed Audio Amplifier (Notifier NFC-125DA)	4,523.49	56.40
28 46 13 31-1724	EA	Black, , 220-240 Volt AC, 125 Watt, 25 VRMS, Four Class A/B Speaker Outputs, Distributed Audio Amplifier (Notifier NFC-125DAE)	4,673.77	56.40
28 46 13 31-1725	EA	50 Watt, 25 VRMS Audio Amplifier Module For A Second Speaker Circuit Or Backup (Notifier NFC-BDA-25 Volt)	696.58	28.20
28 46 13 31-1726	EA	50 Watt, 70 VRMS Audio Amplifier Module For A Second Speaker Circuit Or Backup (Notifier NFC-BDA-70 Volt)	696.58	28.20
28 46 13 31-1727	EA	Circuit Expander Module For NFC-50/125DA(E), Four Additional Class A/B Speaker Circuits (Notifier NFC-CE4)	518.64	28.20
28 46 13 31-1728	EA	Circuit Expander Module For NFC-50/100(E), Six Additional Class A/B Speaker Circuits (Notifier NFC-CE6)	941.53	28.20
28 46 13 31-1729	EA	Standalone Firefighter Telephone System (Notifier NFC-FFT) Note: Includes onboard SLC supports up to 24 monitor modules, built-in handset, black.	3,313.77	56.40
28 46 13 31-1730	EA	Local Operator Console (Notifier NFC-LOC) Note: Includes built-in microphone, message and zone control switches, black.	3,241.64	56.40
28 46 13 31-1731	EA	Black, Remote Microphone (Notifier NFC-RM)	973.05	
28 46 13 31-1732	EA	Remote Page Unit (Notifier NFC-RPU) Note: Includes built-in microphone, message control switches, black.	2,723.19	56.40
28 46 13 31-1733	EA	70 V Conversion Module For NFC-50/100 (Notifier NFC-XRM-70V)	391.64	28.20
28 46 13 31-1734	EA	Firefighters Phone Jack (Notifier N-FPJ)	179.96	8.46
28 46 13 31-1735	EA	Thumblatch Option For NFC-LOC And NFC-RPU (Notifier THUMBLTCH)	48.50	8.46

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-1736	EA	Black, Trim Ring For NFC-RPU Cabinet (Notifier TR-6-B)	158.84	16.92
28 46 13 31-1737		**LED Displays** *(28 46 13 31-1137)*		
28 46 13 31-1738	EA	2.1" x 27" Programmable LED Indoor Display (Notifier ALPHA-215)	2,640.41	33.84
28 46 13 31-1739	EA	Instant And Integrated Emergency Notification System (Notifier LEDSIGN-GW)	3,713.39	45.12
28 46 13 31-1740	EA	4" x 45-1/2" Programmable LED Array, Mass Notification Device (Notifier MEGADOT)	3,756.97	45.12
28 46 13 31-1741	EA	8 Messages, FACP Interface For LED Arrays (Notifier MNS-CONTROL8)	3,606.70	45.12
28 46 13 31-1742	EA	16 Messages, FACP Interface For LED Arrays (Notifier MNS-CONTROL16)	5,064.38	45.12
28 46 13 31-1743	EA	LED Sign, Instant And Integrated Emergency Notification System (Notifier OAX2-24V)	3,832.11	45.12
28 46 13 31-1744		**Control Relays** *(28 46 13 31-1137)*		
28 46 13 31-1745	EA	Single SPDT Relay With LED With Metal Back Box And Red Plastic Cover (Notifier MR-101/CR)	77.06	14.10
28 46 13 31-1746	EA	Single SPDT Relay With LED With Track Mounting Hardware (Notifier MR-101/T)	57.72	14.10
28 46 13 31-1747	EA	Four Position SPDT Relay With LEDs With Metal Back Box And Red Plastic Cover (Notifier MR-104/CR)	213.72	28.20
28 46 13 31-1748	EA	Four Position SPDT Relay With LED With Track Mounting Hardware (Notifier MR-104/T)	120.02	14.10
28 46 13 31-1749	EA	Four Position DSPDT Relay With LED With Track Mounting Hardware (Notifier MR-204/T)	143.76	14.10
28 46 13 31-1750	EA	24 Volt DC, 30 Amperes Contacts, DPDT Relay In Steel Enclosure (Notifier MR-199X-13C)	220.01	28.20
28 46 13 31-1751	EA	120 Volt AC, 30 Amperes Contacts, DPDT Relay In Steel Enclosure (Notifier MR-199X-14C)	220.01	28.20
28 46 13 31-1752	EA	Single DPDT Relay With LED With Metal Back Box And Red Plastic Cover (Notifier MR-201/CR)	109.03	28.20
28 46 13 31-1753	EA	Single DPDT Relay With LED With Track Mounting Hardware (Notifier MR-201/T)	62.75	14.10
28 46 13 31-1754	EA	Four Position DPDT Relay With LEDs With Metal Back Box And Red Plastic Cover (Notifier MR-204/CR)	234.32	28.20
28 46 13 31-1755	EA	24 Volt DC / 24 Volt AC / 115 Volt AC, 10 Amperes, Form C, Multi-Voltage Relay Module (Notifier PAM-1)	77.22	28.20
28 46 13 31-1756	EA	12/24 Volt DC, 7 Amperes, Form C, Multi-Voltage Relay Module (Notifier PAM-2)	77.22	28.20
28 46 13 31-1757	EA	9 To 40 Volt DC, 10 Amperes, Form C, Multi-Voltage Relay Module (Notifier PAM-4)	77.22	28.20
28 46 13 31-1758		**Gamewell-FCI Fire Control Instruments** *(28 46 13 31-1137)*		
28 46 13 31-1759		**7100 Series And NetSOLO®** *(28 46 13 31-1758)*		
28 46 13 31-1760		**7100 Compact Analog Addressable Fire Alarm Control Panels** *(28 46 13 31-1759)*		
28 46 13 31-1761	EA	Enclosure With Metal Door (Gamewell-FCI 7100-ENCL-M)	1,100.37	338.40
28 46 13 31-1762	EA	Basic Systems Kit, 2 Signaling Line Circuits (SLC) (Gamewell-FCI BK-7100-2)	4,852.96	564.00
28 46 13 31-1763	EA	Basic Systems Kit, With Digital Alarm Communicator Transmitter (DACT), 2 Signaling Line Circuits (SLC) (Gamewell-FCI BK-7100-2D)	5,345.97	564.00
28 46 13 31-1764	EA	Basic Systems Kit, 2 Signaling Line Circuits (SLC), 240 Volt AC (Gamewell-FCI BK-7100-2-E)	4,852.96	564.00
28 46 13 31-1765	EA	Basic Systems Kit, With Digital Alarm Communicator Transmitter (DACT), 2 Signaling Line Circuits (SLC), 240 Volt AC (Gamewell-FCI BK-7100-2D-E)	5,345.97	564.00
28 46 13 31-1766	EA	Removal And Replacement Of Board For 7100-1D (Gamewell-FCI BSM-7100-1)	1,631.74	
28 46 13 31-1767	EA	Removal And Replacement Of Board For 7100-2 (Gamewell-FCI BSM-7100-1D)	1,961.57	
28 46 13 31-1768	EA	Analog Loop Unit (Gamewell-FCI ALU)	1,961.57	56.40
28 46 13 31-1769		**NetSOLO® Intelligent Network** *(28 46 13 31-1759)*		
28 46 13 31-1770	EA	Intelligent Network Interface Module, Fiber Optic (Gamewell-FCI INI-7100-FO) Note: Mounted in 7100 panel.	2,178.56	56.40
28 46 13 31-1771	EA	Intelligent Network Interface Module, Unshielded Twisted Pair (Gamewell-FCI INI-7100-UTP) Note: Mounted in 7100 panel.	1,725.48	56.40
28 46 13 31-1772		**Components And Accessories** *(28 46 13 31-1759)*		
28 46 13 31-1773	EA	Remote Serial Annunciator, LCD Display (Gamewell-FCI LCD-7100)	1,067.14	42.30
28 46 13 31-1774	EA	Remote LED Driver Module, Outputs For Remote Panel Switches And 33 Remote LEDs (Gamewell-FCI LDM-7100)	800.23	56.40
28 46 13 31-1775	EA	Fiber Optic Line Driver Module (Gamewell-FCI FLD-1)	1,489.39	56.40
28 46 13 31-1776	EA	Class "A" Optional Module For Both Signaling Line Circuits (SLC) (Gamewell-FCI CAOM)	584.97	56.40
28 46 13 31-1777	EA	Enclosure Box (Gamewell-FCI EN-7100)	446.06	112.80
28 46 13 31-1778	EA	Serial Printer (Order RJAA To Db25 Connector Separately) (Gamewell-FCI P7200-TR-2)	1,570.13	28.20
28 46 13 31-1779		**E3 Series® Basic System** *(28 46 13 31-1758)*		
28 46 13 31-1780	EA	Intelligent Loop Interface, Mother Board (Gamewell-FCI ILI-MB-E3)	1,406.45	56.40
28 46 13 31-1781	EA	Intelligent Loop Interface, Supplemental (Gamewell-FCI ILI-S-E3)	1,202.33	56.40
28 46 13 31-1782	EA	Intelligent Loop Interface, Mother Board, XP95 Protocol (Gamewell-FCI ILI95-MB-E3)	1,406.45	56.40
28 46 13 31-1783	EA	Intelligent Loop Interface, Supplemental, XP95 Protocol (Gamewell-FCI ILI95-S-E3)	1,202.33	56.40
28 46 13 31-1784	EA	LCD Keypad Display (Gamewell-FCI LCD-E3)	900.97	56.40
28 46 13 31-1785	EA	Power Supply Module (Gamewell-FCI PM-9)	1,187.80	56.40
28 46 13 31-1786	EA	Transponder 9 Amperes Power Supply (Gamewell-FCI PM-9 INX)	995.97	56.40
28 46 13 31-1787	EA	Power Supply And Charger, 120/220 Volt AC (Gamewell-FCI PM-9G 9A)	997.68	28.20
28 46 13 31-1788	EA	Digital Alarm Communication Transmitter (Gamewell-FCI DACT-E3)	555.09	56.40
28 46 13 31-1789	EA	Network Repeater, Fiber Optic (Gamewell-FCI RPT-E3-FO)	1,530.41	56.40
28 46 13 31-1790	EA	Network Repeater, Unshielded Twisted Pair (Gamewell-FCI RPT-E3-UTP)	1,278.06	56.40
28 46 13 31-1791	EA	Local Operating Console (Gamewell-FCI 1100-0455)	851.05	42.30
28 46 13 31-1792	EA	Network Graphic Annunciator (Gamewell-FCI 1100-0505)	2,786.06	42.30
28 46 13 31-1793	EA	70.7 VRMS Audio Output Series Amplifier Module (Gamewell-FCI AM-50-70)	1,087.69	56.40
28 46 13 31-1794	EA	INI-VGE-UTP Classic Enabled Voice Gateway Module (Gamewell-FCI 1100-1326)	3,367.35	56.40
28 46 13 31-1795	EA	8-1/4" Wide x 10" High x 4-1/2" Deep Cabinet (Gamewell-FCI E3BB-BAA1)	732.74	112.80
28 46 13 31-1796	EA	C Size, Black, Command Center Enclosure (Gamewell-FCI E3BB-BC/INCC)	525.94	112.80
28 46 13 31-1797	EA	Double Size, Blank, Inner Door Panel (Gamewell-FCI E3-BP)	113.84	28.20

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-1798	EA	Programmable Switch Module (Gamewell-FCI ASM-16)	754.97	56.40
28 46 13 31-1799	EA	LED Driver module (Gamewell-FCI ANU-48)	754.97	56.40
28 46 13 31-1800	EA	Network Graphic Annunciator (Gamewell-FCI NGA)	2,332.91	42.30
28 46 13 31-1801		**Addressable Devices, Module, Pulls And Accessories** *(28 46 13 31-1758)*		
28 46 13 31-1802		**Velociti® Series Sensors And Bases** *(28 46 13 31-1801)*		
28 46 13 31-1803	EA	Analog Addressable Plug-In Ionization Smoke Sensor (Gamewell-FCI ASD-IL2F)	226.95	42.30
28 46 13 31-1804	EA	Analog Addressable Plug-In Photoelectric Smoke Sensor (Gamewell-FCI ASD-PL2F)	232.15	42.30
28 46 13 31-1805	EA	Analog Addressable Plug-In Photoelectric Smoke Sensor With 135 Degree F Fixed Temperature Thermal Sensing (Gamewell-FCI ASD-PTL2F)	247.78	42.30
28 46 13 31-1806	EA	Addressable Plug-In Thermal Sensor, 15 Degree F Rate Of Rise, 135 Degree F (Gamewell-FCI ATD-RL2F)	185.28	42.30
28 46 13 31-1807	EA	Addressable Plug-In Thermal Sensor, 190 Degree F (Gamewell-FCI ATD-HL2F)	193.96	42.30
28 46 13 31-1808	EA	Addressable Plug-In Thermal Sensor, 135 Degree F (Gamewell-FCI ATD-L2F)	185.28	42.30
28 46 13 31-1809	EA	Addressable Plug-In Multi-Criteria Analog Sensor (Gamewell-FCI MCS-ACCLIMATE2F)	284.23	42.30
28 46 13 31-1810	EA	Analog Addressable Laser Smoke Sensor, Low Profile (Gamewell-FCI ASD-LS)	648.78	42.30
28 46 13 31-1811	EA	Analog Addressable Low Flow Photoelectric Smoke Duct Detector Without Relay (Gamewell-FCI ADPF)	531.59	70.50
28 46 13 31-1812	EA	Analog Addressable Low Flow Photoelectric Smoke Duct Detector With Relay (Gamewell-FCI ADPRF)	601.03	70.50
28 46 13 31-1813	EA	Removal And Replacement Of Duct Detector Board (Gamewell-FCI ADP-F-SB)	274.68	
28 46 13 31-1814	EA	Flanged Mounting Base, For Use With Analog Sensor Or Velociti Sensors (Gamewell-FCI ADB-FLF)	55.97	14.10
28 46 13 31-1815	EA	Harsh Environment Analog Addressable Photoelectric Smoke Sensor (Gamewell-FCI ASD-FILTREX-F)	700.86	42.30
28 46 13 31-1816	EA	Flanged Mounting Base, For Use With ASD-FILTREX Or ASD-FILTREX-F (Gamewell-FCI ADB-FILTREXF)	136.70	14.10
28 46 13 31-1817	EA	Addressable Single-Ended Reflected Beam Smoke Sensor (Gamewell-FCI ABD-2F)	2,512.71	84.60
28 46 13 31-1818		**Velociti® Series Modules And Pull Station** *(28 46 13 31-1801)*		
28 46 13 31-1819	EA	Style B, Class B Addressable Monitor Module (Gamewell-FCI AMM-2F)	166.63	28.20
28 46 13 31-1820	EA	Dual Style B, Class B Addressable Monitor Module (Gamewell-FCI AMM-2IF)	276.86	28.20
28 46 13 31-1821	EA	Style D, Class A Addressable Monitor Module (Gamewell-FCI AMM-4F)	183.99	28.20
28 46 13 31-1822	EA	Subloop Style D, Class A Addressable Monitor Module (Gamewell-FCI AMM-4SF)	264.71	28.20
28 46 13 31-1823	EA	Addressable Output Relay Control Module (Gamewell-FCI AOM-2RF)	218.71	28.20
28 46 13 31-1824	EA	Addressable Output Supervised Module (Gamewell-FCI AOM-2SF)	227.39	28.20
28 46 13 31-1825	EA	Addressable Double Action Station, With AMM-2SF Mini-Mod (Gamewell-FCI MS-7AF)	309.83	56.40
28 46 13 31-1826	EA	Addressable Single Action Pull Station (Gamewell-FCI MS-7ASF)	235.20	28.20
28 46 13 31-1827	EA	Telephone Filters (Gamewell-FCI AOM-TEL-FL)	37.32	5.64
28 46 13 31-1828		**Components And Accessories** *(28 46 13 31-1801)*		
28 46 13 31-1829	EA	Remote LED Annunciator Alarm (Gamewell-FCI RA400Z) Note: Mounts on single gang box.	88.52	22.56
28 46 13 31-1830	EA	Up To 2' Wide Ducts Metal Sampling Tube (Gamewell-FCI ST-1.5)	44.26	11.28
28 46 13 31-1831	EA	>2' To 4' Wide Ducts Metal Sampling Tube (Gamewell-FCI ST-3)	47.73	11.28
28 46 13 31-1832	EA	>4' To 8' Wide Ducts Metal Sampling Tube (Gamewell-FCI ST-5)	56.84	14.10
28 46 13 31-1833	EA	>8' To 10' Wide Ducts Metal Sampling Tube (Gamewell-FCI ST-10)	94.60	16.92
28 46 13 31-1834	EA	Remote Test Station With LED Alarm And Magnet Test Switch (Gamewell-FCI RTS451) Note: Mounts on single gang box.	142.33	22.56
28 46 13 31-1835		**Fixed And Rate of Rise Heat Detectors** *(28 46 13 31-1801)*		
28 46 13 31-1836	EA	135 Degree F Fixed Temperature And Rate Of Rise Heat Detector (Gamewell-FCI 5601P)	114.11	42.30
28 46 13 31-1837	EA	194 Degree F Fixed Temperature And Rate Of Rise Heat Detector (Gamewell-FCI 5602)	114.11	42.30
28 46 13 31-1838	EA	135 Degree F Fixed Temperature Heat Detector (Gamewell-FCI 5603)	111.72	42.30
28 46 13 31-1839	EA	194 Degree F Fixed Temperature Heat Detector (Gamewell-FCI 5604)	111.72	42.30
28 46 13 31-1840		**NAC Expander/Power Supply** *(28 46 13 31-1801)*		
28 46 13 31-1841	EA	FireForce 8 NAC Expander/Power Supply, 12/24 Volt DC, 8 Amperes, 4 Notification Appliance Circuits, Built-in Synchronization Protocols For Gamewell, Wheelock, Gentex, Faraday, And System Sensor (Gamewell-FCI FF8)	2,152.28	451.20
28 46 13 31-1842	EA	6A Supplementary Notification Appliance Circuit Power Supply With Sync (Gamewell-FCI GFPS-6)	1,822.45	451.20
28 46 13 31-1843	EA	9A Supplementary Notification Appliance Circuit Power Supply With Sync (Gamewell-FCI GFPS-9)	1,987.37	451.20
28 46 13 31-1844		**Batteries And Accessories** *(28 46 13 31-1758)*		
28 46 13 31-1845	EA	B-17R, 12 Volt DC, 17 Ampere Hours Sealed Lead Acid Battery (Gamewell-FCI 100-2010A)	354.98	28.20
28 46 13 31-1846	EA	B-55R, 12 Volt DC, 55 Ampere Hours Sealed Lead Acid Battery (Gamewell-FCI 100-2710A)	920.89	28.20
28 46 13 31-1847	EA	B-7R, 12 Volt DC, 7 Ampere Hours Sealed Lead Acid Battery (Gamewell-FCI 100-2311A)	181.39	28.20
28 46 13 31-1848	EA	BC-1, Battery Cabinet, Beige (Gamewell-FCI 1100-0653)	427.00	56.40
28 46 13 31-1849	EA	BC-1R, Battery Cabinet, Red (Gamewell-FCI 1100-0654)	427.00	56.40
28 46 13 31-1850	EA	12" High x 12" Wide x 24" Length Vented Steel Battery Cabinet With Hinged Key Lockable Cover (Gamewell-FCI GW70970)	376.66	56.40
28 46 13 31-1851		**Electronic Door Holders** *(28 46 13 31-1758)* Note: Rixson products.		
28 46 13 31-1852	EA	XK-996, Door Holder Extender Kit, 1-1/2" Spacer (Gamewell-FCI 140-30000)	62.32	5.64
28 46 13 31-1853	EA	FM-980, 12 Volt DC, 24 Volt AC/DC Or 120 Volt AC, Floor Mount Door Holder(Gamewell-FCI 140-90000)	501.22	42.30
28 46 13 31-1854	EA	FM-981, 12 Volt DC, 24 Volt AC/DC Or 120 Volt AC, Floor Mount Holder For Double Doors (Gamewell-FCI 140-90001)	690.44	42.30
28 46 13 31-1855	EA	FM-990, 12 Volt DC, 24 Volt AC/DC Or 120 Volt AC, Low Profile Mount Door Holder (Gamewell-FCI 140-90002)	312.70	42.30
28 46 13 31-1856	EA	FM-996, 12 Volt DC, 24 Volt AC/DC Or 120 Volt AC, Surface Mount Door Holder (Gamewell-FCI 140-90003)	297.08	42.30

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-1857	EA	FM-997, 12 Volt DC, 24 Volt AC/DC Or 120 Volt AC, Recessed Mount Door Holder (Gamewell-FCI 140-90004)	312.70	42.30
28 46 13 31-1858	EA	FM-998, 12 Volt DC, 24 Volt AC/DC Or 120 Volt AC, Recessed Mount Door Holder With Concealed Wiring (Gamewell-FCI 140-90005)	312.01	42.30
28 46 13 31-1859		**Fire Alarm Programming** *(28 46 13 31-1758)*		
		Note: For device replacement projects only. Tasks not to be used on projects where a fire alarm panel is replaced.		
28 46 13 31-1860	EA	Program And Test Up To 5 Total Fire Alarm Devices	500.00	
28 46 13 31-1861	EA	Program And Test >5 To 20 Total Fire Alarm Devices	1,000.00	
28 46 13 31-1862	EA	Program And Test >20 To 50 Total Fire Alarm Devices	2,000.00	
28 46 13 31-1863		**Fire-Lite Fire Alarm** *(28 46 13 31-1136)*		
28 46 13 31-1864		**Intelligent Addressable Fire Alarm Control Panel** *(28 46 13 31-1863)*		
28 46 13 31-1865	EA	50 Point, Addressable Fire Alarm Control Panels (Fire-Lite ES-50X)	1,200.91	225.60
28 46 13 31-1866	EA	198 Point, Addressable Fire Alarm Control Panels (Fire-Lite ES-200X)	1,545.70	253.80
28 46 13 31-1867	EA	954 Point, Addressable Fire Alarm Control Panels (Fire-Lite ES-1000X)	2,305.44	282.00
28 46 13 31-1868	EA	Loop Expander Module (Fire-Lite SLC-3LS)	684.28	42.30
28 46 13 31-1869	EA	Optional Cabinet For 1 Or 2 Modules (Fire-Lite BB-2F)	190.99	28.20
28 46 13 31-1870	EA	Optional Cabinet For Up To 6 Modules Mounted On CHS-6 (Fire-Lite BB-6F)	269.88	28.20
28 46 13 31-1871	EA	Battery Back Box (Fire-Lite BB-26)	165.82	16.92
28 46 13 31-1872	EA	Battery Box (Fire-Lite BB-55F)	305.85	16.92
28 46 13 31-1873	EA	Chassis, Mounts Up To 6 Multi-Modules In A BB-6F Cabinet (Fire-Lite CHS-6)	84.08	11.28
28 46 13 31-1874	EA	Chassis, Mounts Up To Six Multi-Modules In A BB-6F Cabine (Fire-Lite CHG-75)	717.26	28.20
28 46 13 31-1875	EA	Battery Charger For Lead-Acid Batteries With A Rating Of 25 To 75 AH (Fire-Lite CHG-120F)	1,528.78	56.40
28 46 13 31-1876	EA	6 AMP, NAC Expander Power Supply (Fire-Lite FL-PS6)	831.68	28.20
28 46 13 31-1877	EA	10 AMP, NAC Expander Power Supply (Fire-Lite FL-PS10)	859.35	28.20
28 46 13 31-1878	EA	Remote, Red LCD Annunciator Mimics The Information Displayed On The Face LCD Display (Fire-Lite ANN-80)	336.59	28.20
28 46 13 31-1879	EA	Led Driver Module Provides Connections To A User Supplied Graphic Annunciator (Fire-Lite ANN-I/O)	411.88	28.20
28 46 13 31-1880	EA	Annunciator Module Provides Three Leds For Each Zone: Alarm, Trouble, And Supervisory. Ships With Red Enclosure (Fire-Lite ANN-LED)	360.25	28.20
28 46 13 31-1881	EA	Provides Alarm (Red) Indicators For Up To 30 Input Zones Or Addressable Points (Fire-Lite ANN-RLED)	360.25	28.20
28 46 13 31-1882	EA	Relay Module Provides 10 Programmable Form-C Relays (Fire-Lite ANN-RLY)	289.74	28.20
28 46 13 31-1883	EA	Serial/Parallel Printer Gateway Module (Fire-Lite ANN-S/PG)	283.35	28.20
28 46 13 31-1884	EA	Addressable Low-Profile Photoelectric Smoke Detector (Fire-Lite SD365 A)	146.77	42.30
28 46 13 31-1885	EA	Addressable Low-Profile Photoelectric Smoke Detector With Thermal Sensor (Fire-Lite SD365T A)	164.18	42.30
28 46 13 31-1886	EA	Remote Test Capable Addressable Photoelectric Smoke Detector For Use With DNR (W) Duct Detector Housing (Fire-Lite SD365R A)	169.17	42.30
28 46 13 31-1887	EA	Addressable, Low-Profile Device That Provides Fire, Heat, And Carbon Monoxide (CO) Detection (Fire-Lite SD365CO)	300.84	42.30
28 46 13 31-1888	EA	Low-Profile 135°F Fixed Thermal Sensor (Fire-Lite H365 A)	140.54	42.30
28 46 13 31-1889	EA	Low-Profile, Intelligent, Rate-Of-Rise Thermal Sensor (Fire-Lite H365R A)	157.88	42.30
28 46 13 31-1890	EA	Low-Profile Intelligent 190°F/88°C Fixed Thermal Sensor (Fire-Lite H365HT A)	186.16	42.30
28 46 13 31-1891	EA	Low-Flow Non-Relay Duct-Detector Housing (Fire-Lite D365PL)	581.73	42.30
28 46 13 31-1892	EA	Addressable Low-Profile Ionization Smoke Detector (Fire-Lite CP355 A)	216.95	42.30
28 46 13 31-1893	EA	Addressable Low-Profile Photoelectric Smoke Detector (Fire-Lite SD355 A)	146.77	42.30
28 46 13 31-1894	EA	Addressable Low-Profile Photoelectric Smoke Detector With Thermal Sensor (Fire-Lite SD355T A)	188.80	42.30
28 46 13 31-1895	EA	Remote Test Capable Addressable Photoelectric Smoke Detector For Use With DNR (W) Duct Detector Housing (Fire-Lite SD355R A)	211.07	42.30
28 46 13 31-1896	EA	Addressable, Low-Profile Device That Provides Fire, Heat, And Carbon Monoxide (Co) Detection (Fire-Lite SD355CO)	156.09	42.30
28 46 13 31-1897	EA	Fast-Response, Low-Profile Heat Detector (Fire-Lite H355 A)	188.22	42.30
28 46 13 31-1898	EA	Fast-Response, Low-Profile Heat Detector With Rate-Of-Rise Option (Fire-Lite H355R A)	182.25	42.30
28 46 13 31-1899	EA	Fast-Response, Low-Profile Heat Detector That Activates At 190°F/88°C (Fire-Lite H355HT A)	213.03	42.30
28 46 13 31-1900	EA	Low-Profile, Intelligent, 'Adapt' Multi-Sensor Detector (B350LP Base Included) (Fire-Lite AD355 A)	208.13	42.30
28 46 13 31-1901	EA	Programmable, Addressable Sounder Base (Fire-Lite B200S(A)-WH)	132.33	28.20
28 46 13 31-1902	EA	Addressable Sounder Base (Fire-Lite B200SR(A)-WH)	152.55	28.20
28 46 13 31-1903	EA	Programmable, Addressable Sounder Base, Low-Frequency (Fire-Lite B200S-LF-WH)	174.33	28.20
28 46 13 31-1904	EA	Addressable Sounder Base, Low-Frequency (Fire-Lite B200SR-LF-WH)	178.00	28.20
28 46 13 31-1905	EA	Intelligent Beam Smoke Detector (Fire-Lite BEAM355)	1,589.51	42.30
28 46 13 31-1906	EA	Intelligent Beam Smoke Detector With Integral Sensitivity Test (Fire-Lite BEAM355S)	1,818.93	42.30
28 46 13 31-1907	EA	Innovairflex Low-Flow Non-Relay Duct-Detector Housing (Includes SD355R) (Fire-Lite D355PL A)	258.16	28.20
28 46 13 31-1908	EA	Innovairflex Low-Flow Non-Relay Duct-Detector Housing (Fire-Lite DNR A)	157.33	28.20
28 46 13 31-1909	EA	Innovairflex Low-Flow Non-Relay Duct-Detector Housing, With NEMA-4 Rating, Watertight (Fire-Lite DNRW)	241.16	28.20
28 46 13 31-1910	EA	Addressable Control Module For One Class B Or A Zone Of Supervised Polarized Notification Appliances (Fire-Lite CMF-300)	102.41	16.92
28 46 13 31-1911	EA	Six-Circuit Supervised Control Module (Fire-Lite CMF-300-6)	528.05	28.20
28 46 13 31-1912	EA	Addressable Relay Module Containing Two Isolated Sets Of Form-C Contacts, Which Operate As A Dpdt Switch (Fire-Lite CRF-300)	154.53	28.20
28 46 13 31-1913	EA	Six-Relay Control Module (Form-C Relays) (Fire-Lite CRF-300-6)	441.23	28.20
28 46 13 31-1914	EA	Module Isolates The SLC (DCL) Loop From Short Circuit Conditions (Fire-Lite I300)	83.79	14.10
28 46 13 31-1915	EA	Six-Fault Isolator Module (Fire-Lite ISO-6)	395.41	28.20
28 46 13 31-1916	EA	Dual Monitor Module (Fire-Lite MDF-300)	187.75	28.20
28 46 13 31-1917	EA	Addressable Monitor Module For One Zone Of Normally-Open Dry-Contact Initiating Devices (Fire-Lite MMF-300)	83.55	14.10
28 46 13 31-1918	EA	Ten-Input Monitor Module (Fire-Lite MMF-300-10)	571.44	28.20
28 46 13 31-1919	EA	Miniature Version Of MMF-300 (Fire-Lite MMF-301)	111.00	22.56
28 46 13 31-1920	EA	Addressable Monitor Module For One Zone Of Conventional Two-Wire Detectors (Fire-Lite MMF-302)	157.93	28.20
28 46 13 31-1921	EA	Six-Zone Interface Module (Fire-Lite MMF-302-6)	565.19	28.20
28 46 13 31-1922	EA	Mount For Modules (Fire-Lite SMB500)	16.86	2.82

copyright 2026 The Gordian Group, Inc.

CSI	MINOR UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-1923		Addressable Control Panels *(28 46 13 31-1863)*		
28 46 13 31-1924	EA	25 Point Intelligent Control (Fire Lite MS-25)	2,182.50	564.00
28 46 13 31-1925	EA	50 Point Intelligent Control (Fire Lite MS-9050UD)	2,439.07	564.00
28 46 13 31-1926	EA	198-Point Intelligent Control (Fire Lite MS-9200UDLS)	3,398.50	564.00
28 46 13 31-1927	EA	636-Point Intelligent Control (Fire Lite MS-9600LS)	5,087.63	564.00
28 46 13 31-1928	EA	636-Point Intelligent Control (Fire Lite MS-9600UDLS)	4,972.18	564.00
28 46 13 31-1929	EA	IP And 4G Cellur Fire Alram Communicator For Fire Alarm Control Panel (Fire-Lite IPGSM-4G)	702.06	
28 46 13 31-1930		Silent Knight Fire Alarm *(28 46 13 31-1136)*		
28 46 13 31-1931		Addressable Fire Alarm Control Panel *(28 46 13 31-1930)*		
28 46 13 31-1932	EA	Addressable Fire Alarm Control Panel (Silent Knight 6820)	2,375.04	282.00
28 46 13 31-1933		Intelligent Addressable Fire Alarm Control Panel with Emergency Voice System *(28 46 13 31-1930)*		
28 46 13 31-1934	EA	Intelligent Fire Alarm Control Panel with Emergency Voice System (Silent Knight 6820EVS)	4,597.79	282.00
28 46 13 31-1935		Compatable EVS Equipment *(28 46 13 31-1930)*		
28 46 13 31-1936	EA	50 Watt Amplifier (Silent Knight EVS-50W)	839.05	56.40
28 46 13 31-1937	EA	125 Watt Amplifier (Silent Knight EVS-125W)	1,468.36	56.40
28 46 13 31-1938	EA	50/100 Watt Amplifier (Silent Knight EVS-100W)	1,824.37	56.40
28 46 13 31-1939	EA	External Backup Amplifier (Silent Knight EVS-100WBU)	643.42	56.40
28 46 13 31-1940	EA	50 Watt Internal Amplifier (Silent Knight EVS-INT50W)	605.24	56.40
28 46 13 31-1941	EA	4 Additional Audio Circuits (Silent Knight EVS-CE4)	219.89	14.10
28 46 13 31-1942	EA	Remote Voice Module (Silent Knight EVS-RVM)	977.85	22.56
28 46 13 31-1943	EA	24 Switch Expander (Silent Knight EVS-SW24)	389.13	28.20
28 46 13 31-1944	EA	Network Voice Control Module (Silent Knight EVS-VCM)	1,170.10	22.56
28 46 13 31-1945	EA	Local Operator Consoule (Silent Knight EVS-LOC)	1,577.08	56.40
28 46 13 31-1946		Compatable SBUS Devices *(28 46 13 31-1930)*		
28 46 13 31-1947	EA	4x40 LCD Remote Fire Annunciator With Four Programmable Buttons, Red (Silent Knight 6860)	946.14	56.40
28 46 13 31-1948	EA	4x20 LCD Remote Fire Annunciator, Gray (Silent Knight 5860)	426.63	56.40
28 46 13 31-1949	EA	4x20 LCD Remote Fire Annunciator, Red (Silent Knight 5860R)	507.32	56.40
28 46 13 31-1950	EA	4x20 LCD Remote Fire Annunciator, Red (Silent Knight 6855)	335.15	56.40
28 46 13 31-1951	EA	LED Annunciators- Display Up To 30 LEDs (15 Red/15 Yellow) (Silent Knight 5865-3)	429.66	56.40
28 46 13 31-1952	EA	LED Annunciators- Display Up To 30 LEDs (15 Red/15 Yellow) With Key Switches For Silence And Reset, And A System Trouble Led (Silent Knight 5865-4)	453.92	56.40
28 46 13 31-1953	EA	LED I/O Module With 40 Programmable LED Outputs And Eight Supervised Dry Contact Inputs (Silent Knight 5880)	354.47	42.30
28 46 13 31-1954	EA	Relay Interface. Provides 10 Form C Relays (Silent Knight 5883)	215.20	28.20
28 46 13 31-1955	EA	Serial/Parallel Printer Interface Module For Printer Connection (Silent Knight 5824)	290.67	28.20
28 46 13 31-1956		SK Compatible Addressable Device *(28 46 13 31-1930)*		
28 46 13 31-1957	EA	Multi Criteria Photoelectric Smoke Detector With Thermal 135°F Fixed Temperature (Silent Knight SK-ACCLIMATE)	153.59	42.30
28 46 13 31-1958	EA	Reflected Beam Smoke Detector Without Test Feature (Silent Knight SK-BEAM)	864.96	42.30
28 46 13 31-1959	EA	Reflected Beam Smoke Detector With Test Feature (Silent Knight SK-BEAM-T)	980.30	42.30
28 46 13 31-1960	EA	Reflected Beam Smoke Detector, SK Protocol (Silent Knight OSI-RI-SK)	1,105.39	42.30
28 46 13 31-1961	EA	Supervised Control Module (Silent Knight SK-CONTROL)	152.07	42.30
28 46 13 31-1962	EA	Six Circuit Supervised Control Module (Silent Knight SK-CONTROL-6)	452.92	56.40
28 46 13 31-1963	EA	Photoelectric Duct Smoke Detector With Extended Air Speed Range (Silent Knight SK-DUCT)	245.63	42.30
28 46 13 31-1964	EA	Four Criteria Fire And Carbon Monoxide Detector (Silent Knight SK-FIRE-CO)	221.85	42.30
28 46 13 31-1965	EA	Four Criteria Fire And Carbon Monoxide Detector, White (Silent Knight SK-FIRE-CO-W)	247.54	42.30
28 46 13 31-1966	EA	Fixed Thermal Detector (135°F) (Silent Knight SK-HEAT)	139.81	42.30
28 46 13 31-1967	EA	Fixed Thermal Detector (135°F), White (Silent Knight SK-HEAT-W)	143.72	42.30
28 46 13 31-1968	EA	Fixed Rate Of Rise Detector (Silent Knight SK-HEAT-ROR)	141.35	42.30
28 46 13 31-1969	EA	Fixed Rate Of Rise Detector, White (Silent Knight SK-HEAT-ROR-W)	143.72	42.30
28 46 13 31-1970	EA	Fixed High Temperature Heat Detector (190°F) (Silent Knight SK-HEAT-HT)	139.81	42.30
28 46 13 31-1971	EA	Fixed High Temperature Heat Detector (190°F), White (Silent Knight SK-HEAT-HT-W)	143.72	42.30
28 46 13 31-1972	EA	Fault Isolator Module (Silent Knight SK-ISO)	139.81	42.30
28 46 13 31-1973	EA	Mini Monitor Module (Silent Knight SK-MINIMON)	129.06	42.30
28 46 13 31-1974	EA	Monitor Module (Silent Knight SK-MONITOR)	137.01	42.30
28 46 13 31-1975	EA	Dual Input Monitor Module (Silent Knight SK-MONITOR-2)	176.62	42.30
28 46 13 31-1976	EA	10 Input Monitor Module (Silent Knight SK-MON-10)	510.59	56.40
28 46 13 31-1977	EA	Photoelectric Smoke Detector (Silent Knight SK-PHOTO)	142.88	42.30
28 46 13 31-1978	EA	Photoelectric Smoke Detector, White (Silent Knight SK-PHOTO-W)	150.92	42.30
28 46 13 31-1979	EA	Photoelectric Detector With Remote Test Capability (Silent Knight SK-PHOTO-R)	145.17	42.30
28 46 13 31-1980	EA	Photoelectric Detector With Remote Test Capability, White (Silent Knight SK-PHOTO-R-W)	153.33	42.30
28 46 13 31-1981	EA	Photoelectric Smoke Detector With Fixed Thermal Heat (135°F) (Silent Knight SK-PHOTO-T)	149.01	42.30
28 46 13 31-1982	EA	Photoelectric Smoke Detector With Fixed Thermal Heat (135°F), White (Silent Knight SK-PHOTO-T-W)	157.15	42.30
28 46 13 31-1983	EA	Multi Criteria Photoelectric Smoke Detector With Thermal 135°F Fixed Temperature, White (Silent Knight SK-PTIR-W)	166.76	42.30
28 46 13 31-1984	EA	Addressable Single Action Pull Station (Silent Knight SK-PULL-SA)	133.95	28.20

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-1985	EA	Addressable Dual Action Pull Station (Silent Knight SK-PULL-DA)	133.95	28.20
28 46 13 31-1986	EA	Addressable Relay Module (Silent Knight SK-RELAY)	123.87	28.20
28 46 13 31-1987	EA	Addressable Six Relay Control Module (Silent Knight SK-RELAY-6)	441.09	56.40
28 46 13 31-1988	EA	Addressable Dual Relay/Monitor Module (Silent Knight SK-RELAYMON-2)	276.29	42.30
28 46 13 31-1989	EA	Addressable Zone Interface Module (Silent Knight SK-ZONE)	164.35	42.30
28 46 13 31-1990	EA	Six Zone Interface Module (Silent Knight SK-ZONE-6)	531.30	56.40
28 46 13 31-1991		**SK Bases** *(28 46 13 31-1930)*		
28 46 13 31-1992	EA	6" Mounting Base (Silent Knight B210LP)	40.85	14.10
28 46 13 31-1993	EA	4" Flangeless Mounting Base (Silent Knight B501)	43.41	14.10
28 46 13 31-1994	EA	Intelligent Sounder Base (Silent Knight B200S)	83.40	14.10
28 46 13 31-1995	EA	Low-Frequency Intelligent Sounder Base (Silent Knight B200-LF)	115.62	14.10
28 46 13 31-1996	EA	Relay Base (Silent Knight B224RB)	68.70	14.10
28 46 13 31-1997	EA	Isolator Base (Silent Knight B224BI)	67.91	14.10
28 46 13 31-1998		**SD Compatible Addressable Device** *(28 46 13 31-1930)*		
28 46 13 31-1999	EA	Addressable Smoke 4" Detector Base (Silent Knight SD505-4AB)	39.24	14.10
28 46 13 31-2000	EA	Addressable Smoke 6" Detector Base (Silent Knight SD505-6AB)	52.71	14.10
28 46 13 31-2001	EA	6" Addressable Relay Base (Silent Knight SD505-6RB)	142.87	14.10
28 46 13 31-2002	EA	6" Addressable Sounder Base (Silent Knight SD505-6SB)	147.92	14.10
28 46 13 31-2003	EA	Addressable Input Module (Silent Knight SD500-AIM)	239.09	42.30
28 46 13 31-2004	EA	Addressable Notification Module (Silent Knight SD500-ANM)	228.77	42.30
28 46 13 31-2005	EA	Addressable Relay Module (Silent Knight SD500-ARM)	246.62	42.30
28 46 13 31-2006		**System Expanders** *(28 46 13 31-1930)*		
28 46 13 31-2007	EA	SLC Expander For IDP Or SK Devices (Silent Knight 6815)	505.89	56.40
28 46 13 31-2008	EA	SLC Expander For SD Devices (Silent Knight 5815XL)	446.33	56.40
28 46 13 31-2009	EA	6A Power Supply With 6 Flexput Circuits And 2 Form C Relays (Silent Knight RPS-1000)	789.89	28.20
28 46 13 31-2010	EA	6 AMP NAC Power Expander With 4 Power-Limited Output Ckts (Silent Knight 5496)	555.81	84.60
28 46 13 31-2011		**Miscellaneous Accessories** *(28 46 13 31-1930)*		
28 46 13 31-2012	EA	Remote Battery Box Accessory Cabinet (Silent Knight RBB)	134.61	28.20
28 46 13 31-2013		**Silent Knight Fire Alarm** *(28 46 13 31-1136)*		
28 46 13 31-2014	EA	Addressable Fire Alarm Control Panel With Integrated Emergency Communication System (Silent Knight 5820XL-EVS)	5,691.07	282.00
28 46 13 31-2015	EA	Supervised Remote Command Unit (Silent Knight EVS-RCU)	2,332.78	169.20
28 46 13 31-2016	EA	Voice Evacuation System (Silent Knight SKE-450)	2,836.16	112.80
28 46 13 31-2017	EA	Fire Fighters Telephone (Silent Knight SK-FFT)	2,342.27	112.80
28 46 13 31-2018	EA	Multi-Loop Addressable Fire Alarm Control/Communicator System (Silent Knight 5820XL)	2,469.53	169.20
28 46 13 31-2019	EA	Single Loop Addressable Fire Alarm Control/Communicator System (Silent Knight 5808)	1,768.41	112.80
28 46 13 31-2020	EA	Single Loop Addressable Fire Alarm Control/Communicator System (Silent Knight 5700)	1,336.98	112.80
28 46 13 31-2021	EA	Hybrid Conventional Fire Alarm Control/Communicator System (Silent Knight 5600)	1,144.21	112.80
28 46 13 31-2022	EA	Ionization Smoke Detector (Silent Knight SK-ION)	208.90	42.30
28 46 13 31-2023	EA	Sounder Base (Silent Knight B200SR)	123.00	14.10
28 46 13 31-2024	EA	Intelligent Sounder Base (Silent Knight B200S)	130.69	14.10
28 46 13 31-2025	EA	Isolator Base (Silent Knight B224BI)	101.25	14.10
28 46 13 31-2026	EA	Relay Base (Silent Knight B224RB)	102.51	14.10
28 46 13 31-2027	EA	Analog Ionization Smoke Detector (Silent Knight SD505-AIS)	203.99	42.30
28 46 13 31-2028	EA	Addressable Heat Sensor (Silent Knight SD505-AHS)	170.98	42.30
28 46 13 31-2029	EA	Addressable Photoelectric Smoke Detector (Silent Knight SD505-APS)	189.65	42.30
28 46 13 31-2030	EA	6" Isolator Base (Silent Knight SD505-6IB)	129.43	14.10
28 46 13 31-2031	EA	SLC Annunciator Driver Module (Silent Knight SD500-LED)	861.73	84.60
28 46 13 31-2032	EA	Loop Isolation Module (Silent Knight SD500-LIM)	197.35	42.30
28 46 13 31-2033	EA	Addressable Mini Input Module (Silent Knight SD500-MIM)	157.63	28.20
28 46 13 31-2034	EA	Single Action Addressable Pull Station (Silent Knight SD500-PS)	206.93	28.20
28 46 13 31-2035	EA	Dual Action Addressable Pull Station (Silent Knight SD500-PSDA)	197.06	28.20
28 46 13 31-2036	EA	Back Box (Silent Knight SK-PSSMBB)	86.44	22.56
28 46 13 31-2037	EA	Smoke Detector Module (Silent Knight SD500-SDM)	222.78	42.30
28 46 13 31-2038	EA	Addressable Duct Housing (Silent Knight SD505-DUCT)	296.46	42.30
28 46 13 31-2039	EA	Addressable Duct Housing With Built-In Relay (Silent Knight SD505-DUCTR)	491.62	42.30
28 46 13 31-2040	EA	Addressable Duct Detector Test Switch (Silent Knight SD505-DTS)	194.79	42.30
28 46 13 31-2041	EA	Intelligent Power Module (Silent Knight 5895XL)	1,246.54	112.80
28 46 13 31-2042	EA	Addressable Pull Station (Silent Knight SK-Pull-DA/SA)	197.06	28.20
28 46 13 31-2043	EA	Digital Fire Communicator with Cabinet (Silent Knight SK-5104)	692.74	84.60
28 46 13 31-2044	EA	Communicator (Silent Knight IPGSM-4G)	1,055.38	56.40
28 46 13 31-2045	EA	Ten Zone Conventional Fire Alarm Control Panel (Silent Knight SK-5208)	1,657.88	112.80
28 46 13 31-2046	EA	10 Zone Expander (Silent Knight SK-5217)	465.84	28.20
28 46 13 31-2047	EA	Remote Annunciator (Silent Knight SK-5235)	454.79	56.40
28 46 13 31-2048	EA	Status Display Module (Silent Knight 5280)	126.89	28.20
28 46 13 31-2049	EA	Four Zone Conventional Fire Alarm Control Panel (Silent Knight SK-4)	922.89	112.80
28 46 13 31-2050	EA	Four Zone Conventional Fire Alarm Control Panel (Silent Knight SK-4E)	941.92	112.80
28 46 13 31-2051	EA	Dress Panel (Silent Knight SK-DP2/4)	171.71	28.20
28 46 13 31-2052	EA	Class A Convertor (Silent Knight SK-CAC4)	460.31	42.30
28 46 13 31-2053	EA	Transmitter Module (Silent Knight SK-4XTM	235.13	42.30

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-2054	EA	LED Interface Module (Silent Knight SK-4XLM)	215.38	42.30
28 46 13 31-2055	EA	110 Volt AC, 3-6 Amperes, Transformer (Silent Knight SK-XRM24)	226.66	28.20
28 46 13 31-2056	EA	Remote Annunciator (Silent Knight SK-RZA4)	215.38	42.30
28 46 13 31-2057	EA	Zone Relay Module (Silent Knight SK-4XZM)	232.65	42.30
28 46 13 31-2058	EA	Two Zone Conventional Fire Alarm Control Panel (Silent Knight SK-2)	791.98	112.80
28 46 13 31-2059	EA	Manual Pull Station (single action) (Silent Knight PS-SATK)	104.18	28.20
28 46 13 31-2060	EA	Manual Pull Station (dual action) (Silent Knight PS-DATK)	113.71	28.20
28 46 13 31-2061	EA	Manual Pull Station (dual action) (Silent Knight PS-DA)	111.04	28.20
28 46 13 31-2062	EA	Dual Action Manual Pull Station, Hex Key (Silent Knight PS-DAH)	97.96	28.20
28 46 13 31-2063	EA	Dual Action Listed Outdoor Manual Pull Station With Black Box (Silent Knight PS-DALOB)	230.55	33.84
28 46 13 31-2064	EA	6 Amperes, 24 Volt DC, Distributed Power Module (with cabinet) (Silent Knight SK-5495)	811.75	84.60
28 46 13 31-2065	EA	9 Amperes, 24 Volt DC, Distributed Power Module (with cabinet) (Silent Knight SK-5499)	916.46	84.60
28 46 13 31-2066	EA	Detector (Silent Knight IDP-PhotoR)	274.51	42.30
28 46 13 31-2067	EA	Monitoring Module (Silent Knight IDP)	284.51	42.30
28 46 13 31-2068	EA	I/O Input-Output Module (Silent Knight SK-2880)	756.08	28.20
28 46 13 31-2069	EA	Remote Annunciator (Silent Knight RA-2000)	2,168.30	84.60
28 46 13 31-2070	EA	Power Supply (Silent Knight 5195/96)	1,355.82	28.20
28 46 13 31-2071	EA	8 Zone Expander (Silent Knight SK-5210)	1,055.95	28.20
28 46 13 31-2072	EA	LCD Remote Annunciator (Silent Knight SK-5230)	430.70	56.40
28 46 13 31-2073	EA	Ionization Smoke Detector (Silent Knight SK-ION)	208.90	42.30
28 46 13 31-2074	EA	Addressable Relay Module (Silent Knight IDP-Relay)	234.53	42.30
28 46 13 31-2075	EA	Telephone Line Monitor (Silent Knight SK-7150)	146.36	28.20
28 46 13 31-2076	EA	Serial Driver Board (Silent Knight SK-2884)	278.30	28.20
28 46 13 31-2077	EA	Smoke Detector Base (Silent Knight IDP-6AB)	78.18	14.10
28 46 13 31-2078	EA	Mini Input Module (Silent Knight IDP-MINIMON)	206.33	28.20
28 46 13 31-2079	EA	Status Display Module (Silent Knight SK-4180)	776.08	28.20
28 46 13 31-2080	EA	8-Channel Digital Communicator (Silent Knight SK-1420)	456.22	28.20
28 46 13 31-2081	EA	Serial Parallel Module (Silent Knight SK-4824)	416.24	28.20
28 46 13 31-2082	EA	Power Supply (Silent Knight SK-5197 / SK-5198)	1,555.72	28.20
28 46 13 31-2083	EA	4-Zone Fire Alarm Control Panel, Complete (Silent Knight SK-5204)	2,624.52	112.80
28 46 13 31-2084	EA	Intelligent Ionization Smoke Detector (Silent Knight IDP-ION)	284.51	42.30
28 46 13 31-2085	EA	Intelligent Photoelectric Smoke Detector (Silent Knight IDP-Photo)	234.53	42.30
28 46 13 31-2086		**Alerton Fire Alarm** *(28 46 13 31)*		
28 46 13 31-2087	EA	UL Listed Surge Protector In CHS-M3 Or CPU2-640 Chassis (Alerton ESD-100)	614.17	8.46
28 46 13 31-2088		**Cooper Fire Alarm** *(28 46 13 31)*		
28 46 13 31-2089	EA	Single Circuit Class A / Multiple B, 12 Or 24 Volt DC, Sync Module (Cooper DSM-12/24-R)	197.13	28.20
28 46 13 31-2090	EA	Red Lens, 21 Joules, 24 Volt DC, Class I, Div 1, Groups C, D, NEMA 4X And 6, Strobe (Cooper EP109205-001)	4,799.99	47.94
28 46 13 31-2091	EA	Red, 100 dB, 24 Volt DC, Class I, Div 1, Groups C, D, NEMA 4X, Multitone Horn (Cooper EP109206-002)	6,337.83	47.94
28 46 13 31-2092	EA	Red Lens, 5 Joules, 24 Volt DC, Red Finish, Class I, Div 2, Groups C And D, NEMA 4X And 6, Strobe (Cooper HL109201-001)	2,294.84	56.40
28 46 13 31-2093	EA	Clear Lens, 5 Joules, 24 Volt DC, Red Finish, Class I, Div 2, Groups C And D, NEMA 4X And 6, Strobe (Cooper HL109201-002)	2,308.51	56.40
28 46 13 31-2094	EA	Amber Lens, 5 Joules, 110 Volt AC, Red Finish, Class I, Div 2, Groups C And D, NEMA 4X And 6, Strobe (Cooper HL109201-007)	2,308.51	56.40
28 46 13 31-2095	EA	Red Lens, 10 Joules, 24 Volt DC, Wire Guard, Black Finish, Class I, Div 2, Groups A, B, C And D, NEMA 4X And 6, Strobe (Cooper HL109202-001)	1,703.62	56.40
28 46 13 31-2096	EA	Amber Lens, 10 Joules, 120 Volt AC, Wire Guard, Black Finish, Class I, Div 2, Groups A, B, C And D, NEMA 4X And 6, Strobe (Cooper HL109202-003)	1,703.62	56.40
28 46 13 31-2097	EA	Red Lens, 10 Joules, 120 Volt AC, Wire Guard, Black Finish, Class I, Div 2, Groups A, B, C And D, NEMA 4X And 6, Strobe (Cooper HL109202-004)	1,703.62	56.40
28 46 13 31-2098	EA	Amber Lens, 15 Joules, 120 Volt AC, Wire Guard, Black Finish, Backstrap, Class I, Div 2, Groups A, B, C And D, NEMA 4X And 6, Strobe (Cooper HL109202-005)	2,308.51	56.40
28 46 13 31-2099	EA	Amber Lens, 15 Joules, 120 Volt AC, Wire Guard, Black Finish, Pendant Mounted, Class I, Div 2, Groups A, B, C And D, NEMA 4X And 6, Strobe (Cooper HL109202-006)	2,308.51	56.40
28 46 13 31-2100	EA	Red Lens, 15 Joules, 120 Volt AC, Wire Guard, Black Finish, Blackstrap, Class I, Div 2, Groups A, B, C And D, NEMA 4X And 6, Strobe (Cooper HL109202-007)	2,308.51	56.40
28 46 13 31-2101	EA	Red Lens, 15 Joules, 120 Volt AC, Wire Guard, Black Finish, Pendant Mounted, Class I, Div 2, Groups A, B, C And D, NEMA 4X And 6, Strobe (Cooper HL109202-008)	2,308.51	56.40
28 46 13 31-2102	EA	Red Lens, 15 Joules, 24 Volt DC, Wire Guard, Blackstrap, Black Finish, Class I, Div 2, Groups A, B, C And D, NEMA 4X And 6, Strobe (Cooper HL109203-002)	2,308.51	56.40
28 46 13 31-2103	EA	Red Lens, 21 Joules, 24 Volt DC, Red Finish, Class I, Div 2, Groups C And D, NEMA 4X And 6, Strobe (Cooper HL109204-001)	2,662.21	56.40
28 46 13 31-2104	EA	Red Lens, 21 Joules, 24 Volt DC, Black Finish, Class I, Div 2, Groups C And D, NEMA 4X And 6, Strobe (Cooper HL109204-003)	2,470.83	56.40
28 46 13 31-2105	EA	Amber Lens, 21 Joules, 110 Volt AC, Red Finish, Class I, Div 2, Groups C And D, NEMA 4X And 6, Strobe (Cooper HL109204-005)	2,470.83	56.40
28 46 13 31-2106	EA	Red Lens, 21 Joules, 110 Volt AC, Red Finish, Class I, Div 2, Groups C And D, NEMA 4X And 6, Strobe (Cooper HL109204-006)	2,470.83	56.40
28 46 13 31-2107		**Light Engineered Displays Message Boards** *(28 46 13 31)*		
28 46 13 31-2108	EA	Two Message Sign, Announcement And Evacuate (LED SP-2/MNS)	981.31	33.84
28 46 13 31-2109	EA	Four Message Sign, Fire, Weather, Announcement, E Voltuate (LED SP-4)	863.72	33.84
28 46 13 31-2110		**Safety Technology International Fire Alarm** *(28 46 13 31)*		
28 46 13 31-2111		**Enclosures** *(28 46 13 31-2110)*		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-2112	EA	6" Height x 6" Width x 4" Depth, Opaque, Fiberglass Enclosure (STI EF060604-O)	131.71	16.92
28 46 13 31-2113	EA	6" Height x 6" Width x 4" Depth, Opaque, Fiberglass Enclosure With Window (STI EF060604-W)	171.04	16.92
28 46 13 31-2114	EA	8" Height x 6" Width x 4" Depth, Opaque, Fiberglass Enclosure (STI EF080604-O)	134.34	16.92
28 46 13 31-2115	EA	8" Height x 6" Width x 4" Depth, Opaque, Fiberglass Enclosure With Window (STI EF080604-W)	171.91	16.92
28 46 13 31-2116	EA	8" Height x 8" Width x 4" Depth, Opaque, Fiberglass Enclosure (STI EF080804-O)	137.83	16.92
28 46 13 31-2117	EA	8" Height x 8" Width x 4" Depth, Opaque, Fiberglass Enclosure With Window (STI EF080804-W)	198.13	16.92
28 46 13 31-2118	EA	10" Height x 8" Width x 6" Depth, Opaque, Fiberglass Enclosure (STI EF100806-O)	143.95	16.92
28 46 13 31-2119	EA	10" Height x 8" Width x 6" Depth, Opaque, Fiberglass Enclosure With Window (STI EF100806-W)	197.26	16.92
28 46 13 31-2120	EA	12" Height x 10" Width x 6" Depth, Opaque, Fiberglass Enclosure (STI EF121006-O)	154.44	16.92
28 46 13 31-2121	EA	12" Height x 10" Width x 6" Depth, Opaque, Fiberglass Enclosure With Window (STI EF121006-W)	213.86	16.92
28 46 13 31-2122	EA	14" Height x 12" Width x 6" Depth, Opaque, Fiberglass Enclosure (STI EF141206-O)	183.27	16.92
28 46 13 31-2123	EA	14" Height x 12" Width x 6" Depth, Opaque, Fiberglass Enclosure With Window (STI EF141206-W)	276.78	16.92
28 46 13 31-2124	EA	14" Height x 12" Width x 8" Depth, Opaque, Fiberglass Enclosure (STI EF141208-O)	197.26	16.92
28 46 13 31-2125	EA	14" Height x 12" Width x 8" Depth, Opaque, Fiberglass Enclosure With Window (STI EF141208-W)	348.44	16.92
28 46 13 31-2126	EA	16" Height x 14" Width x 8" Depth, Opaque, Fiberglass Enclosure (STI EF161408-O)	209.49	16.92
28 46 13 31-2127	EA	16" Height x 14" Width x 8" Depth, Opaque, Fiberglass Enclosure With Window (STI EF161408-W)	358.92	16.92
28 46 13 31-2128	EA	18" Height x 16" Width x 10" Depth, Opaque, Fiberglass Enclosure (STI EF181610-O)	248.81	16.92
28 46 13 31-2129	EA	18" Height x 16" Width x 10" Depth, Opaque, Fiberglass Enclosure With Window (STI EF181610-W)	368.54	16.92
28 46 13 31-2130	EA	20" Height x 16" Width x 10" Depth, Opaque, Fiberglass Enclosure (STI EF201610-O)	358.92	16.92
28 46 13 31-2131	EA	20" Height x 16" Width x 10" Depth, Opaque, Fiberglass Enclosure With Window (STI EF201610-W)	531.95	16.92
28 46 13 31-2132	EA	6" Height x 6" Width x 5" Depth, Opaque, Polycarbonate Enclosure (STI EP060605-O)	98.51	16.92
28 46 13 31-2133	EA	6" Height x 6" Width x 5" Depth, Tinted, Polycarbonate Enclosure (STI EP060605-T)	107.25	16.92
28 46 13 31-2134	EA	8" Height x 6" Width x 5" Depth, Opaque, Polycarbonate Enclosure (STI EP080605-O)	102.44	16.92
28 46 13 31-2135	EA	8" Height x 6" Width x 5" Depth, Tinted, Polycarbonate Enclosure (STI EP080605-T)	109.87	16.92
28 46 13 31-2136	EA	8" Height x 8" Width x 5" Depth, Opaque, Polycarbonate Enclosure (STI EP080805-O)	105.94	16.92
28 46 13 31-2137	EA	8" Height x 8" Width x 5" Depth, Tinted, Polycarbonate Enclosure (STI EP080805-T)	114.67	16.92
28 46 13 31-2138	EA	10" Height x 8" Width x 6" Depth, Opaque, Polycarbonate Enclosure (STI EP100806-O)	107.25	16.92
28 46 13 31-2139	EA	10" Height x 8" Width x 6" Depth, Tinted, Polycarbonate Enclosure (STI EP100806-T)	125.16	16.92
28 46 13 31-2140	EA	10" Height x 8" Width x 7" Depth, Opaque, Polycarbonate Enclosure (STI EP100807-O)	112.49	16.92
28 46 13 31-2141	EA	10" Height x 8" Width x 7" Depth, Tinted, Polycarbonate Enclosure (STI EP100807-T)	128.66	16.92
28 46 13 31-2142	EA	10" Height x 10" Width x 6" Depth, Opaque, Polycarbonate Enclosure (STI EP101006-O)	117.30	16.92
28 46 13 31-2143	EA	10" Height x 10" Width x 6" Depth, Tinted, Polycarbonate Enclosure (STI EP101006-T)	130.84	16.92
28 46 13 31-2144	EA	12" Height x 10" Width x 7" Depth, Opaque, Polycarbonate Enclosure (STI EP121007-O)	118.61	16.92
28 46 13 31-2145	EA	12" Height x 10" Width x 7" Depth, Tinted, Polycarbonate Enclosure (STI EP121007-T)	135.21	16.92
28 46 13 31-2146	EA	14" Height x 12" Width x 7" Depth, Opaque, Polycarbonate Enclosure (STI EP141207-O)	138.71	16.92
28 46 13 31-2147	EA	14" Height x 12" Width x 7" Depth, Tinted, Polycarbonate Enclosure (STI EP141207-T)	171.91	16.92
28 46 13 31-2148	EA	16" Height x 14" Width x 9" Depth, Opaque, Polycarbonate Enclosure (STI EP161409-O)	152.69	16.92
28 46 13 31-2149	EA	16" Height x 14" Width x 9" Depth, Tinted, Polycarbonate Enclosure (STI EP161409-T)	205.12	16.92
28 46 13 31-2150	EA	18" Height x 16" Width x 5" Depth, Opaque, Polycarbonate Enclosure (STI EP181604-O)	169.29	16.92
28 46 13 31-2151	EA	18" Height x 16" Width x 5" Depth, Tinted, Polycarbonate Enclosure (STI EP181604-T)	219.98	16.92
28 46 13 31-2152	EA	18" Height x 16" Width x 11" Depth, Opaque, Polycarbonate Enclosure (STI EP181611-O)	192.01	16.92
28 46 13 31-2153	EA	18" Height x 16" Width x 11" Depth, Tinted, Polycarbonate Enclosure (STI EP181611-T)	257.55	16.92
28 46 13 31-2154	EA	20" Height x 16" Width x 9" Depth, Opaque, Polycarbonate Enclosure (STI EP201608-O)	304.74	16.92
28 46 13 31-2155	EA	20" Height x 16" Width x 9" Depth, Tinted, Polycarbonate Enclosure (STI EP201608-T)	318.72	16.92
28 46 13 31-2156	EA	24" Height x 24" Width x 10" Depth, Opaque, Polycarbonate Enclosure (STI EP242410-O)	458.55	16.92
28 46 13 31-2157	EA	24" Height x 24" Width x 10" Depth, Tinted, Polycarbonate Enclosure (STI EP242410-T)	531.08	16.92
28 46 13 31-2158		**STI® Fire Alarm Devices** *(28 46 13 31-2110)*		
28 46 13 31-2159	EA	Pull Station Polycarbonate Cover, Semi-Flush With Horn (STI-1100) Note: Includes 9 Volt DC self contained battery.	157.49	16.92
28 46 13 31-2160	EA	Surface Mounted, Manual Pull Station Polycarbonate Cover With Horn (STI-1130)	171.91	16.92
28 46 13 31-2161	EA	Flush Mounted, Manual Pull Station Polycarbonate Cover (STI-1200)	101.35	16.92
28 46 13 31-2162	EA	Surface Mounted, Horn Strobe Polycarbonate Cover (STI-1210D) Note: For surface mounted horn strobes.	102.22	16.92
28 46 13 31-2163	EA	Flush Mounted, Horn Strobe Polycarbonate Cover (STI-1210E)	90.86	16.92
28 46 13 31-2164	EA	Strobe Damage Stopper And Open Back Box With Conduit Knockout (STI-1221D) Note: For surface mounted strobe.	102.22	16.92
28 46 13 31-2165	EA	Strobe Damage Stopper And Open Back Box, Semi-Flush (STI-1221E)	82.34	16.92
28 46 13 31-2166	EA	NEMA 4X Rated Polycarbonate Dome Cover (STI-1229)	193.76	16.92
28 46 13 31-2167	EA	Surface Mounted, Manual Pull Station Polycarbonate Cover (STI-1230) Note: For surface mounted pull stations.	129.09	16.92
28 46 13 31-2168	EA	Backplate For Polycarbonate Cover (STI-1280)	61.45	16.92
28 46 13 31-2169	EA	Conduit Gasket For Polycarbonate Cover (STI-3003)	44.33	16.92
28 46 13 31-2170	EA	Conduit Spacer For Surface Mounted Polycarbonate Cover (STI-3100)	62.42	16.92
28 46 13 31-2171	EA	Weather Resistant, Surface Mounted, Manual Pull Station Polycarbonate Cover (STI-3150)	144.39	16.92
28 46 13 31-2172	EA	8.5" x 6.5" x 4.6", Thumb Lock, Lockable Enclosure (STI-7511A)	119.48	16.92
28 46 13 31-2173	EA	Flush Mounted, Smoke Detector Polycarbonate Cover (STI-8100)	88.02	16.92
28 46 13 31-2174	EA	Flush Mounted, Low Profile, Smoke Detector Steel Wire Cover (STI-9601)	83.21	16.92
28 46 13 31-2175	EA	Surface Mounted, Low Profile, Smoke Detector, Polyester Shell, Steel Wire Cover (STI-9602)	80.37	16.92
28 46 13 31-2176	EA	Flush Mounted, Mini Smoke Detector, Polyester Shell, Steel Wire Cover (STI-9604)	83.21	16.92
28 46 13 31-2177	EA	Surface Mounted, Mini Smoke Detector, Polyester Shell, Steel Wire Cover (STI-9605)	80.37	16.92
28 46 13 31-2178	EA	Flush Mounted, High Profile, Smoke Detector, Polyester Shell, Steel Wire Cover (STI-9609)	83.21	16.92
28 46 13 31-2179	EA	Surface Mounted, High Profile, Smoke Detector, Polyester Shell, Steel Wire Cover (STI-9610)	80.37	16.92
28 46 13 31-2180	EA	Beam Smoke Detector, Polyester Shell, Steel Wire Cover (STI-9625)	158.37	16.92
28 46 13 31-2181	EA	White, Flush Mounted, Horn/Strobe/Speaker, Polyester Shell, Steel Wire Cover (STI-9705)	74.65	16.92
28 46 13 31-2182	EA	Red, Flush Mounted, Horn/Strobe/Speaker, Polyester Shell, Steel Wire Cover (STI-9705-R)	107.32	16.92
28 46 13 31-2183	EA	Flush Mounted, Beam Smoke Detector, Polyester Shell, Steel Wire Cover (STI-9706)	113.80	16.92
28 46 13 31-2184	EA	Surface Mounted, Beam Smoke Detector, Polyester Shell, Steel Wire Cover (STI-9707)	113.80	16.92
28 46 13 31-2185	EA	White, Surface Mounted, Horn/Strobe/Speaker, Polyester Shell, Steel Wire Cover (STI-9708)	82.34	16.92
28 46 13 31-2186	EA	Red, Surface Mounted, Horn/Strobe/Speaker, Polyester Shell, Steel Wire Cover (STI-9708-R)	82.34	16.92

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-2187	EA	White, Flush Mounted, Horn/Strobe/Speaker, Polyester Shell, Steel Wire Cover (STI-9711)	74.65	16.92
28 46 13 31-2188	EA	Flush Mounted, Smoke Detector, Polyester Shell, Steel Wire Cover (STI-9713)	82.34	16.92
28 46 13 31-2189	EA	White, Surface Mounted, Horn/Strobe/Speaker, Polyester Shell, Steel Wire Cover (STI-9714)	82.34	16.92
28 46 13 31-2190	EA	Yellow, High Threat, Push Button Station (STI SS-2201)	134.39	8.46
28 46 13 31-2191	EA	Gasket Kit For STI Covers (STI SUB-121)	54.12	
28 46 13 31-2192	EA	Stopper II® With Horn Flush Mount, Custom Label (STI STI-1100CR)	191.77	28.20
28 46 13 31-2193	EA	Smoke Detector Guard, Stainless Steel, Surface Mounting, Open Back, 9-1/4" Width, 5" Depth (STI STI-8230-SS)	230.82	16.92
28 46 13 31-2194	EA	Universal Cover With Horn, Flush Mount, Momentary Button, Exit Label, Green Stopper Station (STI SS-2144XT)	205.12	16.92
28 46 13 31-2195	EA	No Cover, Push And Turn-To-Reset Button, Evacuation Label, Yellow Stopper Station (STI SS-2201EV)	112.05	16.92
28 46 13 31-2196	EA	No Cover, Push And Key-To-Rest Button, Emergency Label, Blue Stopper Station (STI SS-2400EM)	112.05	16.92
28 46 13 31-2197	EA	Universal Cover With Horn, Flush Mount, Push And Key-To-Reset Button, Emergency Label, Blue Stopper Station (STI SS-2440EM)	205.12	16.92
28 46 13 31-2198	EA	Flush Mounted, Weather Stopper II (STI-1250)	120.57	16.92
28 46 13 31-2199	EA	Flush Mounted, Clear, Universal Stopper (STI-13000NC)	80.37	16.92
28 46 13 31-2200	EA	Flush Mounted, Universal, Fire Label, Red, Stopper With Horn (STI-13020FR)	137.39	16.92
28 46 13 31-2201	EA	Surface Mounted, Clear, Universal Stopper (STI-13200NC)	96.76	16.92
28 46 13 31-2202	EA	Surface Mounted, Fire Label, Red, Universal Stopper (STI-13210FR)	105.50	16.92
28 46 13 31-2203	EA	Surface Mounted, No Label, White, Universal Stopper (STI-13210NW)	114.67	16.92
28 46 13 31-2204	EA	Surface Mounted, No Label, Yellow, Universal Stopper (STI-13210NY)	114.67	16.92
28 46 13 31-2205	EA	Surface Mounted, Fire Label, Red, Universal Stopper With Horn (STI-13220FR)	153.56	16.92
28 46 13 31-2206	EA	Surface Mounted, No Label, Yellow, Universal Stopper With Horn (STI-13220NY)	162.30	16.92
28 46 13 31-2207	EA	Surface Mounted, Fire Label, Red, Universal Stopper With Horn And Relay (STI-13230FR)	192.89	16.92
28 46 13 31-2208	EA	Stopper II, Weather Gasket (STI-3002)	43.41	16.92
28 46 13 31-2209	EA	Large, Break Glass Stopper (STI-4100)	113.80	16.92
28 46 13 31-2210	EA	Stopper "G" Standard Break Glass Cover (STI-6100)	109.87	16.92
28 46 13 31-2211	EA	Clear, Polycarbonate Enclosure With Deep Back Box And Exterior Key Lock (STI-7510A)	106.15	16.92
28 46 13 31-2212	EA	Polycarbonate Multi-Purpose Enclosure With Backplate And Key Lock (STI-7530)	282.02	16.92
28 46 13 31-2213	EA	Heated, Metal, Protective Cabinet (STI-7560AH)	3,931.34	16.92
28 46 13 31-2214	EA	Stainless Steel Guard (STI-9604SS)	76.66	16.92
28 46 13 31-2215	EA	5-3/4" Width x 4-1/2" Depth, Motion Detector Guard (STI-9621)	69.01	16.92

28 46 13 31-2216 System Sensor Fire Alarm *(28 46 13 31)*

28 46 13 31-2217 Smoke Detectors *(28 46 13 31-2216)*

28 46 13 31-2218	EA	Beam Detector Heater Kit (System Sensor BEAMHK)	62.19	5.64
28 46 13 31-2219	EA	Reflectors, Beam Detector Heater Kit (System Sensor BEAMHKR) Note: Four used with long range kit.	266.43	5.64
28 46 13 31-2220	EA	Projected Beam Smoke Detector Long Range Kit (System Sensor BEAMLRK)	311.88	56.40
28 46 13 31-2221	EA	Wall Or Ceiling Mounted, Projected Beam Smoke Detector Multi-Mount Kit (System Sensor BEAMMMK)	224.35	56.40
28 46 13 31-2222	EA	Projected Beam Smoke Detector Surface Mounted Kit (System Sensor BEAMSMK)	179.73	56.40
28 46 13 31-2223	EA	Two Wire, Photoelectric Smoke Detector (System Sensor 2W-B)	187.51	42.30
28 46 13 31-2224	EA	Two Wire, Photoelectric Smoke Detector With Thermal Sensor (System Sensor 2WT-B)	167.84	42.30
28 46 13 31-2225	EA	Two Wire, Photoelectric Smoke Detector With Thermal Sensor And Built In Sounder (System Sensor 2WTA-B)	198.60	42.30
28 46 13 31-2226	EA	Four Wire, Photoelectric Smoke Detector (System Sensor 4W-B)	191.08	42.30
28 46 13 31-2227	EA	Four Wire, Photoelectric Smoke Detector With Thermal Sensor, 12/24 Volt DC (System Sensor 4WT-B)	179.28	42.30
28 46 13 31-2228	EA	Four Wire, Photoelectric Smoke Detector With Thermal Sensor And Built In Sounder (System Sensor 4WTA-B)	204.14	42.30
28 46 13 31-2229	EA	Four Wire, Photoelectric Smoke Detector With Isolated Thermal Sensor, Built In Sounder, Form C Relay (System Sensor 4WITAR-B)	269.14	42.30
28 46 13 31-2230	EA	Photoelectric, Low-Profile, Smoke Detector Head (System Sensor 2151)	155.51	28.20
28 46 13 31-2231	EA	Photoelectric With Thermal Sensor, Low-Profile, Smoke Detector Head (System Sensor 2151T) Note: Requires B100 series base.	179.43	28.20
28 46 13 31-2232	EA	Heavy-Duty Multi-Mount Kit (System Sensor 6500-MMK)	305.08	14.10
28 46 13 31-2233	EA	Surface-Mount Kit For Use With Beam1224 And FSB-200 When Using 6500-MMK Heavy-Duty Multi-Mount Kit (System Sensor 6500-SMK)	101.71	14.10
28 46 13 31-2234	EA	Four Wire, Low Profile, Plug In Detector (System Sensor 2D51)	192.42	42.30

28 46 13 31-2235 Duct Smoke Detectors *(28 46 13 31-2216)*

28 46 13 31-2236	EA	Two Wire Conventional Photoelectric Duct Detector (Includes 2151 Detector) (System Sensor D2)	384.37	42.30
28 46 13 31-2237	EA	Four Wire Conventional Photoelectric Duct Detector (Includes 2D51 Detector) (System Sensor D4120)	380.93	42.30
28 46 13 31-2238	EA	Watertight, Four Wire Conventional Photoelectric Duct Detector (Includes 2D51 Detector) (System Sensor D4120W)	502.05	47.94
28 46 13 31-2239	EA	Sensor Only, Four Wire Conventional Photoelectric Duct Detector (System Sensor D4S)	250.91	28.20
28 46 13 31-2240	EA	Duct Accessory Coil (Required On DNR If A Remote Test Station Is Used) (System Sensor DCOIL)	67.83	8.46
28 46 13 31-2241	EA	Intelligent, Non-Relay, Duct Smoke Detector Housing (System Sensor DNR)	215.60	22.56
28 46 13 31-2242	EA	Watertight, Intelligent, Non-Relay, Duct Smoke Detector Housing (System Sensor DNRW)	352.73	28.20
28 46 13 31-2243	EA	1' Steel Sampling Tube (System Sensor DST1)	37.32	11.28
28 46 13 31-2244	EA	1.5' Steel Sampling Tube (System Sensor DST1.5)	41.21	11.28
28 46 13 31-2245	EA	3' Steel Sampling Tube (System Sensor DST3)	47.10	11.28
28 46 13 31-2246	EA	5' Steel Sampling Tube (System Sensor DST5)	60.66	14.10
28 46 13 31-2247	EA	10' Steel Sampling Tube (System Sensor DST10)	90.93	16.92
28 46 13 31-2248	EA	1' Steel, Exhaust Tube Duct (System Sensor ETX)	42.81	11.28
28 46 13 31-2249	EA	Remote Test Station For Duct Smoke Detector (System Sensor RTS151)	101.43	14.10
28 46 13 31-2250	EA	Detector Installation/Removal Tool Kit For 700 Series Detectors (System Sensor XR2)	229.40	
28 46 13 31-2251	EA	Detector Installation/Removal Tool Kit For 800 And 355 Series Detectors (System Sensor XR2B)	246.56	

28 46 13 31-2252 Heat Detectors *(28 46 13 31-2216)*

28 46 13 31-2253	EA	Single Circuit, 135 Degree F, Fixed And Rate-Of-Rise, Heat Detector (System Sensor 5601P)	117.85	42.30
28 46 13 31-2254	EA	Single Circuit, 194 Degree F, Fixed And Rate-Of-Rise, Heat Detector (System Sensor 5602)	111.72	42.30

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-2255	EA	Dual Circuit, 135 Degree F, Fixed And Rate-Of-Rise, Heat Detector (System Sensor 5621)	132.08	42.30
28 46 13 31-2256	EA	Dual Circuit, 194 Degree F, Fixed And Rate-Of-Rise, Heat Detector (System Sensor 5622)	132.08	42.30
28 46 13 31-2257	EA	Dual Circuit, 135 Degree F, Fixed Temperature Heat Detector (System Sensor 5623)	145.89	42.30
28 46 13 31-2258	EA	Dual Circuit, 194 Degree F, Fixed Temperature Heat Detector (System Sensor 5624)	145.89	42.30
28 46 13 31-2259		**Horns** *(28 46 13 31-2216)*		
28 46 13 31-2260	EA	Red, Mini Horn (System Sensor MHR)	120.93	42.30
28 46 13 31-2261	EA	White, Mini Horn (System Sensor MHW)	120.93	42.30
28 46 13 31-2262	EA	White, 12/24 Volt DC, Wall Mounted Horn Only (System Sensor HWL)	122.70	42.30
28 46 13 31-2263	EA	Red, Outdoor, Wall Mounted Replacement Horn (System Sensor HRK-R)	155.72	47.94
28 46 13 31-2264	EA	Red, Indoor, Wall Mounted, Horn (System Sensor HRL)	122.70	42.30
28 46 13 31-2265	EA	Red, Outdoor, Wall Mounted, Horn (System Sensor HRK)	187.51	42.30
28 46 13 31-2266	EA	White, Indoor, Wall Mounted, Compact Horn (System Sensor HGRL)	123.27	42.30
28 46 13 31-2267	EA	Red, Indoor, Wall Mounted, Compact Horn (System Sensor HGWL)	123.27	42.30
28 46 13 31-2268		**Wall Mounted Horns/Strobes** *(28 46 13 31-2216)*		
28 46 13 31-2269	EA	Red, Two Wire, 12/24 Volt DC, Selectable Intensity (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Wall Mounted Horn/Strobe (System Sensor P2RL)	170.41	42.30
28 46 13 31-2270	EA	Red, Two Wire, 12/24 Volt DC, Selectable Intensity (135, 150, 177, 185 Candela) High-Candela, Wall Mounted Horn/Strobe (System Sensor P2RH)	224.72	42.30
28 46 13 31-2271	EA	Outdoor Back Box, Red, Two Wire, 12/24 Volt DC, Selectable Intensity (135, 150, 177, 185 Candela) High-Candela, Wall Mounted Horn/Strobe (System Sensor P2RHK)	256.06	47.94
28 46 13 31-2272	EA	Plain, Outdoor Back Box, Red, Two Wire, 12/24 Volt DC, Selectable Intensity (135, 150, 177, 185 Candela) High-Candela, Wall Mounted Horn/Strobe (System Sensor P2RHK-P)	249.77	47.94
28 46 13 31-2273	EA	Outdoor Back Box, Red, 120 Volt AC, Selectable Intensity (135, 150, 177, 185 Candela) High-Candela, Wall Mounted Horn/Strobe (System Sensor P2RHK-120)	262.07	47.94
28 46 13 31-2274	EA	Outdoor Back Box, Red, Two Wire, 12/24 Volt DC, Selectable Intensity (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Wall Mounted Horn/Strobe (System Sensor P2RK)	255.20	47.94
28 46 13 31-2275	EA	Plain, Outdoor Back Box, Red, Two Wire, 12/24 Volt DC, Selectable Intensity (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Wall Mounted Horn/Strobe (System Sensor P2RK-P)	241.76	47.94
28 46 13 31-2276	EA	Outdoor, Red, , Two Wire, 12/24 Volt DC, Selectable Intensity (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Wall Mounted Horn/Strobe (System Sensor P2RK-R)	210.17	42.30
28 46 13 31-2277	EA	Plain, Red, Two Wire, 12/24 Volt DC, Selectable Intensity (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Wall Mounted Horn/Strobe (System Sensor P2RL-P)	166.41	42.30
28 46 13 31-2278	EA	White, Two Wire, 12/24 Volt DC, Selectable Intensity (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Wall Mounted Horn/Strobe (System Sensor P2WL)	170.41	42.30
28 46 13 31-2279	EA	White, Two Wire, 12/24 Volt DC, Selectable Intensity (135, 150, 177, 185 Candela) High-Candela, Wall Mounted Horn/Strobe (System Sensor P2WH)	226.42	42.30
28 46 13 31-2280	EA	Outdoor Back Box, White, Two Wire, 12/24 Volt DC, Selectable Intensity (135, 150, 177, 185 Candela) High-Candela, Wall Mounted Horn/Strobe (System Sensor P2WHK)	247.48	47.94
28 46 13 31-2281	EA	Plain, Outdoor Back Box, White, Two Wire, 12/24 Volt DC, Selectable Intensity (135, 150, 177, 185 Candela) High-Candela, Wall Mounted Horn/Strobe (System Sensor P2WHK-P)	249.77	47.94
28 46 13 31-2282	EA	Plain, White, Two Wire, 12/24 Volt DC, Selectable Intensity (135, 150, 177, 185 Candela) High-Candela, Wall Mounted Horn/Strobe (System Sensor P2WH-P)	224.72	42.30
28 46 13 31-2283	EA	Outdoor Back Box, White, Two Wire, 12/24 Volt DC, Selectable Intensity (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Wall Mounted Horn/Strobe (System Sensor P2WK)	263.78	47.94
28 46 13 31-2284	EA	Plain, Outdoor Back Box, White, Two Wire, 12/24 Volt DC, Selectable Intensity (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Wall Mounted Horn/Strobe (System Sensor P2WK-P)	241.76	47.94
28 46 13 31-2285	EA	Plain, White, Two Wire, 12/24 Volt DC, Selectable Intensity (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Wall Mounted Horn/Strobe (System Sensor P2WL-P)	165.55	42.30
28 46 13 31-2286	EA	Red, Four Wire, 12/24 Volt DC, Selectable Intensity (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Wall Mounted Horn/Strobe (System Sensor P4RL)	206.45	42.30
28 46 13 31-2287	EA	Red, Four Wire, 12/24 Volt DC, Selectable Intensity (135, 150, 177, 185 Candela) High-Candela, Wall Mounted Horn/Strobe (System Sensor P4RH)	244.51	42.30
28 46 13 31-2288	EA	Outdoor Back Box, Red, Four Wire, 12/24 Volt DC, Selectable Intensity (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Wall Mounted Horn/Strobe (System Sensor P4RK)	282.71	47.94
28 46 13 31-2289	EA	Outdoor, Red, Four Wire, 12/24 Volt DC, Selectable Intensity (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Wall Mounted Horn/Strobe (System Sensor P4RK-R)	236.04	47.94
28 46 13 31-2290	EA	White, Four Wire, 12/24 Volt DC, Selectable Intensity (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Wall Mounted Horn/Strobe (System Sensor P4WL)	206.45	42.30
28 46 13 31-2291	EA	Outdoor Back Box, White, Four Wire, 12/24 Volt DC, Selectable Intensity (135, 150, 177, 185 Candela) High-Candela, Wall Mounted Horn/Strobe (System Sensor PC4WHK)	287.26	47.94
28 46 13 31-2292	EA	Outdoor Back Box, White, Four Wire, 12/24 Volt DC, Selectable Intensity (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Wall Mounted Horn/Strobe (System Sensor P4WK)	250.34	47.94
28 46 13 31-2293	EA	Red, 24 Volt DC, Low-frequency, Selectable Intensity (15, 30, 75, 95, 110, 135 And 185 Candela) Multi-Candela, Wall Mounted, Horn/Strobe (System Sensor P2RL-LF)	256.22	42.30
28 46 13 31-2294	EA	White, 24 Volt DC, Low-frequency, Selectable Intensity (15, 30, 75, 95, 110, 135 And 185 Candela) Multi-Candela, Wall Mounted, Horn/Strobe (System Sensor P2WL-LF)	256.22	42.30
28 46 13 31-2295	EA	Red, 12/24 Volt DC, Two Wire, Selectable Intensity (15, 30, 75, 95, 110, 135 And 185 Candela) Multi-Candela, Wall Mounted, Compact Horn Strobe (System Sensor P2GRL)	169.84	42.30
28 46 13 31-2296	EA	White, 12/24 Volt DC, Two Wire, Selectable Intensity (15, 30, 75, 95, 110, 135 And 185 Candela) Multi-Candela, Wall Mounted, Compact Horn Strobe (System Sensor P2GWL)	169.84	42.30
28 46 13 31-2297		**Ceiling Mounted Horns/Strobes** *(28 46 13 31-2216)*		
28 46 13 31-2298	EA	Red, Two Wire, 12/24 Volt DC, Selectable Intensity (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Ceiling Mounted Horn/Strobe (System Sensor PC2RL)	173.27	42.30
28 46 13 31-2299	EA	Red, Two Wire, 12/24 Volt DC, Selectable Intensity (135, 150, 177, 185 Candela) High-Candela, Ceiling Mounted Horn/Strobe (System Sensor PC2RH)	228.13	42.30
28 46 13 31-2300	EA	Outdoor Back Box, Red, Two Wire, 12/24 Volt DC, Selectable Intensity (135, 150, 177, 185 Candela) High-Candela, Ceiling Mounted Horn/Strobe (System Sensor PC2RHK)	247.48	47.94

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-2301	EA	Outdoor Back Box, Red, Two Wire, 12/24 Volt DC, Selectable Intensity (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Ceiling Mounted Horn/Strobe (System Sensor PC2RK)	240.04	47.94
28 46 13 31-2302	EA	Plain, Red, Two Wire, 12/24 Volt DC, Selectable Intensity (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Ceiling Mounted Horn/Strobe (System Sensor PC2R-P)	216.17	42.30
28 46 13 31-2303	EA	White, Two Wire, 12/24 Volt DC, Selectable Intensity (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Ceiling Mounted Horn/Strobe (System Sensor PC2WL)	173.27	42.30
28 46 13 31-2304	EA	White, Two Wire, 12/24 Volt DC, Selectable Intensity (135, 150, 177, 185 Candela) High-Candela, Ceiling Mounted Horn/Strobe (System Sensor PC2WH)	228.13	42.30
28 46 13 31-2305	EA	Outdoor Back Box, White, Two Wire, 12/24 Volt DC, Selectable Intensity (135, 150, 177, 185 Candela) High-Candela, Ceiling Mounted Horn/Strobe (System Sensor PC2WHK)	247.48	47.94
28 46 13 31-2306	EA	Plain, White, Two Wire, 12/24 Volt DC, Selectable Intensity (135, 150, 177, 185 Candela) High-Candela, Ceiling Mounted Horn/Strobe (System Sensor PC2WH-P)	228.13	42.30
28 46 13 31-2307	EA	Outdoor Back Box, White, Two Wire, 12/24 Volt DC, Selectable Intensity (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Ceiling Mounted Horn/Strobe (System Sensor PC2WK)	240.04	47.94
28 46 13 31-2308	EA	Plain, White, Two Wire, 12/24 Volt DC, Selectable Intensity (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Ceiling Mounted Horn/Strobe (System Sensor PC2W-P)	214.46	42.30
28 46 13 31-2309	EA	Red, Ceiling Mounted, Four Wire, 12/24 Volt DC, Selectable Intensity (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Horn/Strobe (System Sensor PC4RL)	207.88	42.30
28 46 13 31-2310	EA	Red, Ceiling Mounted, Four Wire, 12/24 Volt DC, Selectable Intensity (135, 150, 177, 185 Candela) High-Candela, Horn/Strobe (System Sensor PC4RH)	244.51	42.30
28 46 13 31-2311	EA	White, Four Wire, 12/24 Volt DC, Selectable Intensity (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Ceiling Mounted Horn/Strobe (System Sensor PC4WL)	207.88	42.30
28 46 13 31-2312		**Wall Mounted Strobes** *(28 46 13 31-2216)*		
28 46 13 31-2313	EA	White Strobe Expander Plate Back Box Skirt (System Sensor SEP-BBSW)	79.57	14.10
28 46 13 31-2314	EA	White Strobe Expander Plate With Standard Candela (System Sensor SEP-SW)	156.63	14.10
28 46 13 31-2315	EA	Red, Selectable Candela (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Wall Mounted Strobe (System Sensor SRL)	152.96	42.30
28 46 13 31-2316	EA	Red, Selectable Candela (135, 150, 177, 185 Candela) High-Candela, Wall Mounted Strobe (System Sensor SRH)	203.35	42.30
28 46 13 31-2317	EA	Red, Outdoor, Selectable Candela (135, 150, 177, 185 Candela) High-Candela, Wall Mounted Strobe (System Sensor SRHK)	249.46	47.94
28 46 13 31-2318	EA	Red, Outdoor, Selectable Candela (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Wall Mounted Strobe (System Sensor SRK)	246.29	47.94
28 46 13 31-2319	EA	Red, Plain, Outdoor, Selectable Candela (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Wall Mounted Strobe (System Sensor SRK-P)	221.16	47.94
28 46 13 31-2320	EA	Red, Outdoor, Selectable Candela (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Wall Mounted Strobe (System Sensor SRK-R)	193.13	47.94
28 46 13 31-2321	EA	Red, Plain, Selectable Candela (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Wall Mounted Strobe (System Sensor SRL-P)	151.53	42.30
28 46 13 31-2322	EA	White, 12/24 Volt DC, Selectable (15, 15 /75, 30, 75 , 110, 115 Candela) Multi-Candela, Wall Mounted Strobe (System Sensor SWL)	152.39	42.30
28 46 13 31-2323	EA	White, Amber Lens, 12/24 Volt DC, Selectable (15, 15 /75, 30, 75 , 110, 115 Candela) Multi-Candela, Wall Mounted Strobe (System Sensor SWL-ALERT)	165.83	42.30
28 46 13 31-2324	EA	White, Clear Lens, 12/24 Volt DC, Selectable (15, 15 /75, 30, 75 , 110, 115 Candela) Multi-Candela, Wall Mounted Strobe (System Sensor SWL-CLR-ALERT)	202.50	42.30
28 46 13 31-2325	EA	White, High-Candela, Selectable Candela (135, 150, 177, 185 Candela), Wall Mounted Strobe (System Sensor SWH)	212.75	42.30
28 46 13 31-2326	EA	White, Amber Lens, High-Candela, Selectable Candela (135, 150, 177, 185 Candela), Wall Mounted Strobe (System Sensor SWH-ALERT)	211.05	42.30
28 46 13 31-2327	EA	White, Plain, High-Candela, Selectable Candela (135, 150, 177, 185 Candela), Wall Mounted Strobe (System Sensor SWH-P)	211.05	42.30
28 46 13 31-2328	EA	Red, Plain, Outdoor, Selectable Candela (135, 150, 177, 185 Candela) High-Candela, Wall Mounted Strobe (System Sensor SRHK-P)	224.60	47.94
28 46 13 31-2329	EA	White, Outdoor, High-Candela, Selectable Candela (135, 150, 177, 185 Candela), Wall Mounted Strobe (System Sensor SWHK)	222.02	47.94
28 46 13 31-2330	EA	White, Plain, Outdoor, High-Candela, Selectable Candela (135, 150, 177, 185 Candela), Wall Mounted Strobe (System Sensor SWHK-P)	224.02	47.94
28 46 13 31-2331	EA	Red, Outdoor, Selectable Candela (135, 150, 177, 185 Candela) High-Candela, Wall Mounted Strobe (System Sensor SRHK-R)	227.45	47.94
28 46 13 31-2332	EA	White, Outdoor, Selectable Candela (15, 15/75, 30, 75, 95, 110, 115 Candela), Wall Mounted Strobe (System Sensor SWK)	219.73	47.94
28 46 13 31-2333	EA	White, Plain, Outdoor, Selectable Candela (15, 15/75, 30, 75, 95, 110, 115 Candela), Wall Mounted Strobe (System Sensor SWK-P)	220.88	47.94
28 46 13 31-2334	EA	White, Plain, 12/24 Volt DC, Selectable (15, 15 /75, 30, 75 , 110, 115 Candela) Multi-Candela, Wall Mounted Strobe (System Sensor SWL-P)	151.25	42.30
28 46 13 31-2335	EA	Amber, Wall Strobe Lens Attachment (System Sensor LENS-A)	27.01	5.64
28 46 13 31-2336	EA	Blue, Wall Strobe Lens Attachment (System Sensor LENS-B)	27.01	5.64
28 46 13 31-2337	EA	Green, Wall Strobe Lens Attachment (System Sensor LENS-G)	27.01	5.64
28 46 13 31-2338	EA	Red, Wall Strobe Lens Attachment (System Sensor LENS-R)	27.01	5.64
28 46 13 31-2339	EA	Red, 12/24 Volt DC, Wall Mounted, L-Series Compact Strobe (System Sensor SGRL)	155.25	42.30
28 46 13 31-2340	EA	White, 12/24 Volt DC, Wall Mounted, L-Series Compact Strobe (System Sensor SGWL)	152.10	42.30
28 46 13 31-2341	EA	L-Series, Amber, Wall Strobe Lens Attachment (System Sensor LENS-A2, AC2)	27.01	5.64
28 46 13 31-2342	EA	L-Series, Blue, Wall Strobe Lens Attachment (System Sensor LENS-B2, BC2)	27.01	5.64
28 46 13 31-2343	EA	L-Series, Green, Wall Strobe Lens Attachment (System Sensor LENS-G2, GC2)	27.01	5.64
28 46 13 31-2344	EA	L-Series, Red, Wall Strobe Lens Attachment (System Sensor LENS-R2, RC2)	27.01	5.64
28 46 13 31-2345	EA	Red, 8 Multi-tone, 12 VDC, 1575CD, Wall Mounted Strobe (Wheelock MT-121575W-FR)	231.11	42.30
28 46 13 31-2346	EA	White, 8 Multi-tone, 12 VDC,1575CD, No Lettering, Wall Mounted Strobe (Wheelock MT-121575W-NW)	231.11	42.30
28 46 13 31-2347	EA	L-Series, White, Clear Lens, Outdoor, Selectable Candela (15, 15/75, 30, 75, 95, 110, 115 Candela), Wall Mounted Speaker/Strobe (System Sensor SPSWL-CLR-ALERT)	225.74	47.94

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-2348		**Ceiling Mounted Strobes** *(28 46 13 31-2216)*		
28 46 13 31-2349	EA	Red, Two Wire, 12/24 Volt DC, Selectable Intensity (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Ceiling Mounted Strobe (System Sensor SCRL)	156.11	42.30
28 46 13 31-2350	EA	Red, Two Wire, 12/24 Volt DC, Selectable Intensity (135, 150, 177, 185 Candela) High-Candela, Ceiling Mounted Strobe (System Sensor SCRH)	206.51	42.30
28 46 13 31-2351	EA	Outdoor Back Box, Red, Two Wire, 12/24 Volt DC, Selectable Intensity (135, 150, 177, 185 Candela) High-Candela, Ceiling Mounted Strobe (System Sensor SCRHK)	249.46	47.94
28 46 13 31-2352	EA	Outdoor Back Box, Red, Two Wire, 12/24 Volt DC, Selectable Intensity (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Ceiling Mounted Strobe (System Sensor SCRK)	249.46	47.94
28 46 13 31-2353	EA	White, Two Wire, 12/24 Volt DC, Selectable Intensity (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Ceiling Mounted Strobe (System Sensor SCWL)	156.11	42.30
28 46 13 31-2354	EA	Clear Lens, White, Two Wire, 12/24 Volt DC, Standard Candela, Ceiling Mounted Strobe (System Sensor SCWL-CLR-ALERT)	167.55	42.30
28 46 13 31-2355	EA	White, Two Wire, 12/24 Volt DC, Selectable Intensity (135, 150, 177, 185 Candela) High-Candela, Ceiling Mounted Strobe (System Sensor SCWH)	216.17	42.30
28 46 13 31-2356	EA	Outdoor Back Box, White, Two Wire, 12/24 Volt DC, Selectable Intensity (135, 150, 177, 185 Candela) High-Candela, Ceiling Mounted Strobe (System Sensor SCWHK)	222.02	47.94
28 46 13 31-2357	EA	Outdoor Back Box, White, Two Wire, 12/24 Volt DC, Selectable Intensity (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Ceiling Mounted Strobe (System Sensor SCWK)	219.73	47.94
28 46 13 31-2358	EA	Plain, White, Two Wire, 12/24 Volt DC, Selectable Intensity (15, 15/75, 30, 75, 110, 115 Candela) Multi-Candela, Ceiling Mounted Strobe (System Sensor SCW-P)	190.54	42.30
28 46 13 31-2359	EA	Blue, Ceiling Strobe Lens Attachment (System Sensor LENS-BC)	27.01	5.64
28 46 13 31-2360	EA	Red, Ceiling Strobe Lens Attachment (System Sensor LENS-RC)	27.01	5.64
28 46 13 31-2361	EA	Green, Ceiling Strobe Lens Attachment (System Sensor LENS-GC)	27.01	5.64
28 46 13 31-2362	EA	Amber, Ceiling Strobe Lens Attachment (System Sensor LENS-AC)	27.01	5.64
28 46 13 31-2363		**Wall Mounted Speakers** *(28 46 13 31-2216)*		
28 46 13 31-2364	EA	24 Volt DC, 4 Field Selectable Sound Pulse Patterns, Directional Sound Speaker With Voice And Integral Audio Amplifier (System Sensor PF24V)	417.55	42.30
28 46 13 31-2365	EA	Red, Wall Mounted Speaker (System Sensor SPRL)	129.79	42.30
28 46 13 31-2366	EA	Red, Outdoor, Wall Mounted Speaker (System Sensor SPRK)	213.32	42.30
28 46 13 31-2367	EA	Red, Outdoor, Wall Mounted Speaker (System Sensor SPRK-R)	174.83	47.94
28 46 13 31-2368	EA	Red, High dB, Wall Mounted Speaker (System Sensor SPRV)	163.76	42.30
28 46 13 31-2369	EA	White, Wall Mounted Speaker (System Sensor SPWL)	129.79	42.30
28 46 13 31-2370	EA	White, Outdoor, Wall Mounted Speaker (System Sensor SPWK)	223.45	47.94
28 46 13 31-2371	EA	White, High dB, Wall Mounted Speaker (System Sensor SPWV)	147.41	42.30
28 46 13 31-2372		**Ceiling Mounted Speakers** *(28 46 13 31-2216)*		
28 46 13 31-2373	EA	Red, Ceiling Mounted Speaker (System Sensor SPCRL)	126.65	42.30
28 46 13 31-2374	EA	Outdoor, Ceiling Mounted Speaker (System Sensor SPCRK)	227.89	42.30
28 46 13 31-2375	EA	Red, High dB, Ceiling Mounted Speaker (System Sensor SPCRV)	163.76	42.30
28 46 13 31-2376	EA	White, Ceiling Mounted Speaker (System Sensor SPCWL)	129.22	42.30
28 46 13 31-2377	EA	White, High dB, Ceiling Mounted Speaker (System Sensor SPCWV)	170.04	42.30
28 46 13 31-2378	EA	White, Outdoor, Ceiling Mounted Speaker (System Sensor SPCWK)	224.60	47.94
28 46 13 31-2379		**Wall Mounted Speakers/Strobes** *(28 46 13 31-2216)*		
28 46 13 31-2380	EA	White Speaker Strobe Expander Plate With Standard Candela (System Sensor SEP-SPSWL)	154.63	14.10
28 46 13 31-2381	EA	White Speaker Strobe Expander Plate Back Box Skirt (System Sensor SPSEP-BBSWL)	76.14	14.10
28 46 13 31-2382	EA	Red, Selectable Candela (15, 15/75, 30, 75, 95, 110, 115 Candela), Wall Mounted Speaker/Strobe (System Sensor SPSRL)	216.18	42.30
28 46 13 31-2383	EA	Red, High-Candela, Selectable Candela (135, 150, 177, 185 Candela), Wall Mounted Speaker/Strobe (System Sensor SPSRH)	263.51	42.30
28 46 13 31-2384	EA	Red, Outdoor, Selectable Candela (15, 15/75, 30, 75, 95, 110, 115 Candela), Wall Mounted Speaker/Strobe (System Sensor SPSRK)	355.54	47.94
28 46 13 31-2385	EA	Red, Plain, Outdoor, Selectable Candela (15, 15/75, 30, 75, 95, 110, 115 Candela), Wall Mounted Speaker/Strobe (System Sensor SPSRK-P)	312.70	47.94
28 46 13 31-2386	EA	Red, Outdoor, Selectable Candela (15, 15/75, 30, 75, 95, 110, 115 Candela), Wall Mounted Speaker/Strobe (System Sensor SPSRK-R)	265.21	47.94
28 46 13 31-2387	EA	Red, Plain, Selectable Candela (15, 15/75, 30, 75, 95, 110, 115 Candela), Wall Mounted Speaker/Strobe (System Sensor SPSRL-P)	213.60	42.30
28 46 13 31-2388	EA	Red, High dB, Selectable Candela (15, 15/75, 30, 75, 95, 110, 115 Candela), Wall Mounted Speaker/Strobe (System Sensor SPSRV)	254.01	42.30
28 46 13 31-2389	EA	White, Amber Lens, Wall Mounted, Selectable Candela (15, 15/75, 30, 75, 95, 110, 115 Candela), Wall Mounted Speaker/Strobe (System Sensor SPSWL-ALERT)	217.32	42.30
28 46 13 31-2390	EA	White, Clear Lens, Outdoor, Selectable Candela (15, 15/75, 30, 75, 95, 110, 115 Candela), Wall Mounted Speaker/Strobe (System Sensor SPSWK-CLR-ALERT)	316.70	47.94
28 46 13 31-2391	EA	White, Selectable Candela (15, 15/75, 30, 75, 95, 110, 115 Candela), Wall Mounted Speaker/Strobe (System Sensor SPSWL)	216.18	42.30
28 46 13 31-2392	EA	White, High-Candela, Selectable Candela (135, 150, 177, 185 Candela), Wall Mounted Speaker/Strobe (System Sensor SPSWH)	277.69	42.30
28 46 13 31-2393	EA	White, Plain, High-Candela, Selectable Candela (135, 150, 177, 185 Candela), Wall Mounted Speaker/Strobe (System Sensor SPSWH-P)	277.69	42.30
28 46 13 31-2394	EA	White, Outdoor, Selectable Candela (15, 15/75, 30, 75, 95, 110, 115 Candela), Wall Mounted Speaker/Strobe (System Sensor SPSWK)	328.14	47.94
28 46 13 31-2395	EA	White, Plain, Outdoor, Selectable Candela (15, 15/75, 30, 75, 95, 110, 115 Candela), Wall Mounted Speaker/Strobe (System Sensor SPSWK-P)	311.55	47.94
28 46 13 31-2396	EA	White, Plain, Selectable Candela (15, 15/75, 30, 75, 95, 110, 115 Candela), Wall Mounted Speaker/Strobe (System Sensor SPSWL-P)	212.46	42.30

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-2397	EA	White, High dB, Selectable Candela (15, 15/75, 30, 75, 95, 110, 115 Candela), Wall Mounted Speaker/Strobe (System Sensor SPSWV)	267.43	42.30
28 46 13 31-2398	EA	White, Plain, High dB, Selectable Candela (15, 15/75, 30, 75, 95, 110, 115 Candela), Wall Mounted Speaker/Strobe (System Sensor SPSWV-P)	267.43	42.30
28 46 13 31-2399		**Ceiling Mounted Speakers/Strobes** *(28 46 13 31-2216)*		
28 46 13 31-2400	EA	Red, Selectable Candela (15, 15/75, 30, 75, 95, 110, 115 Candela), Ceiling Mounted Speaker/Strobe (System Sensor SPSCRL)	200.73	42.30
28 46 13 31-2401	EA	Red, Selectable Candela (135, 150, 177, 185) Candela, High-Candela, Ceiling Mounted Speaker/Strobe (System Sensor SPSCRH)	266.68	42.30
28 46 13 31-2402	EA	Red, High dB, Selectable Candela (15, 15/75, 30, 75, 95, 110, 115), Ceiling Mounted Speaker/Strobe (System Sensor SPSCRV)	254.01	42.30
28 46 13 31-2403	EA	White, Selectable Candela (15, 15/75, 30, 75, 95, 110, 115 Candela), Ceiling Mounted Speaker/Strobe (System Sensor SPSCWL)	200.73	42.30
28 46 13 31-2404	EA	White, Clear Lens, Selectable Candela (15, 15/75, 30, 75, 95, 110, 115 Candela), Ceiling Mounted Speaker/Strobe (System Sensor SPSCWL-CLR-ALERT)	215.03	42.30
28 46 13 31-2405	EA	White, High-Candela, Selectable Candela (135, 150, 177, 185 Candela), Ceiling Mounted Speaker/Strobe (System Sensor SPSCWH)	277.69	42.30
28 46 13 31-2406	EA	White, Outdoor, High-Candela, Selectable Candela (135, 150, 177, 185 Candela), Ceiling Mounted Speaker/Strobe (System Sensor SPSCWHK)	329.86	47.94
28 46 13 31-2407	EA	White, Plain, High-Candela, Selectable Candela (135, 150, 177, 185 Candela), Ceiling Mounted Speaker/Strobe (System Sensor SPSCWH-P)	277.69	42.30
28 46 13 31-2408	EA	White, Outdoor, Clear Lens, Selectable Candela (15, 15/75, 30, 75, 95, 110, 115 Candela), Ceiling Mounted Speaker/Strobe (System Sensor SPSCWK-CLR-ALERT)	317.27	47.94
28 46 13 31-2409	EA	White, Outdoor, Selectable Candela (15, 15/75, 30, 75, 95, 110, 115 Candela), Ceiling Mounted Speaker/Strobe (System Sensor SPSCWK)	328.14	47.94
28 46 13 31-2410	EA	White, Plain, Selectable Candela (15, 15/75, 30, 75, 95, 110, 115 Candela), Ceiling Mounted Speaker/Strobe (System Sensor SPSCWL-P)	200.73	42.30
28 46 13 31-2411	EA	White, High dB, Selectable Candela (15, 15/75, 30, 75, 95, 110, 115 Candela), Ceiling Mounted Speaker/Strobe (System Sensor SPSCWV)	267.43	42.30
28 46 13 31-2412	EA	White, High-Candela/High dB, Selectable Candela (135, 150, 177, 185 Candela), Ceiling Mounted Speaker/Strobe (System Sensor SPSCWVH)	277.69	42.30
28 46 13 31-2413	EA	White, Plain, High dB, Selectable Candela (15, 15/75, 30, 75, 95, 110, 115 Candela), Ceiling Mounted Speaker/Strobe (System Sensor SPSCWV-P)	267.43	42.30
28 46 13 31-2414	EA	High-Candela/High dB, Ceiling Mounted Speaker/Strobe (System Sensor SPSCRVH)	277.44	42.30
28 46 13 31-2415		**Electric Alarm Bells** *(28 46 13 31-2216)*		
28 46 13 31-2416	EA	6" Diameter, 24 Volt DC Alarm Bell (System Sensor SSM24-6)	163.26	42.30
28 46 13 31-2417	EA	8" Diameter, 24 Volt DC Alarm Bell (System Sensor SSM24-8)	177.28	42.30
28 46 13 31-2418	EA	10" Diameter, 24 Volt DC Alarm Bell (System Sensor SSM24-10)	192.72	42.30
28 46 13 31-2419	EA	6" 120 Volt AC Alarm Bell (System Sensor SSV120-6)	182.00	42.86
28 46 13 31-2420	EA	8" 120 Volt AC Alarm Bell (System Sensor SSV120-8)	184.25	42.86
28 46 13 31-2421	EA	10" 120 Volt AC Alarm Bell (System Sensor SSV120-10)	198.49	42.86
28 46 13 31-2422		**Device Bases** *(28 46 13 31-2216)*		
28 46 13 31-2423	EA	High Or Low Volume Output, Code 3 Or 4, Continuous, March Or Custom Tone, Intelligent, Addressable, Programmable Plug-In Sounder Base (System Sensor B200S)	131.46	14.10
28 46 13 31-2424	EA	Code 3 Or Continuous Tone, Intelligent Plug-In Sounder Base (System Sensor B200SR)	127.17	14.10
28 46 13 31-2425	EA	Intelligent Isolator Base (System Sensor B224BI)	104.00	14.10
28 46 13 31-2426	EA	Intelligent Relay Base (System Sensor B224RB)	105.14	14.10
28 46 13 31-2427	EA	Flangeless, Intelligent Detector Base (System Sensor B501)	63.90	14.10
28 46 13 31-2428	EA	High Or Low Volume Output, Code 3 Or 4, Continuous, March Or Custom Tone, Intelligent, Addressable, Programmable Plug-In Sounder Base, Ivory (System Sensor B200S-IV)	131.46	14.10
28 46 13 31-2429	EA	Code 3 Or Continuous Tone, Intelligent Plug-In Sounder Base, Ivory (System Sensor B200SR-IV)	127.17	14.10
28 46 13 31-2430	EA	Low-Frequency, Code 3 Or Continuous Tone, Intelligent Plug-In Sounder Base (System Sensor B200SR-LF)	191.81	14.10
28 46 13 31-2431	EA	Low-Frequency, Code 3 Or Continuous Tone, Intelligent Plug-In Sounder Base, Ivory (System Sensor B200SR-LF-IV)	191.81	14.10
28 46 13 31-2432	EA	Low-Frequency, Code 3 Or Continuous Tone, Intelligent Plug-In Sounder Base, White (System Sensor B200SR-LF-WH)	185.52	14.10
28 46 13 31-2433	EA	Code 3 Or Continuous Tone, Intelligent Plug-In Sounder Base, White (System Sensor B200SR-WH)	147.46	14.10
28 46 13 31-2434	EA	High Or Low Volume Output, Code 3 Or 4, Continuous, March Or Custom Tone, Intelligent, Addressable, Programmable Plug-In Sounder Base, White (System Sensor B200S-WH)	124.59	14.10
28 46 13 31-2435	EA	Intelligent Isolator Base, Ivory (System Sensor B224BI-IV)	104.00	14.10
28 46 13 31-2436	EA	Intelligent Isolator Base, White (System Sensor B224BI-WH)	97.14	14.10
28 46 13 31-2437	EA	Intelligent Relay Base, Ivory (System Sensor B224RB-IV)	105.14	14.10
28 46 13 31-2438	EA	Intelligent Relay Base, White (System Sensor B224RB-WH)	98.57	14.10
28 46 13 31-2439	EA	Flangeless, Intelligent Detector Base, Black (System Sensor B501-BL)	63.90	14.10
28 46 13 31-2440	EA	Flangeless, Intelligent Detector Base, Ivory (System Sensor B501-IV)	63.90	14.10
28 46 13 31-2441	EA	Flangeless, Intelligent Detector Base, White (System Sensor B501-WHITE)	56.46	14.10
28 46 13 31-2442	EA	Intelligent, Addressable, Programmable Low Frequency Plug-In Sounder Base (System Sensor B200S-LF)	195.25	14.10
28 46 13 31-2443	EA	Intelligent, Addressable, Programmable Low Frequency Plug-In Sounder Base, Ivory (System Sensor B200S-LF-IV)	195.25	14.10
28 46 13 31-2444	EA	Intelligent, Addressable, Programmable Low Frequency Plug-In Sounder Base, White (System Sensor B200S-LF-WH)	187.81	14.10
28 46 13 31-2445	EA	6" Intelligent Flanged Mounting Base (System Sensor B300-6)	49.65	14.10
28 46 13 31-2446	EA	6" Intelligent Flanged Mounting Base, Ivory (System Sensor B300-6-IV)	56.80	14.10
28 46 13 31-2447	EA	Two Wire, Flanged, 12/24 Volt DC, Low-Profile, Adapter Base (System Sensor B110LP)	56.39	14.10
28 46 13 31-2448	EA	Four Wire, Form A And C, 24 Volt DC Low-Profile, Adapter Base (System Sensor B112LP)	116.71	16.92

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-2449		**Boxes, Plates And Decals** *(28 46 13 31-2216)*		
28 46 13 31-2450	EA	120 Volt AC, Mounting Plate, For Spectralert Advance Devices (System Sensor MP120K)	57.03	14.10
28 46 13 31-2451	EA	Red, Wall Mounted, Metal, Weatherproof Back Box (System Sensor MWBB)	88.04	14.10
28 46 13 31-2452	EA	White, Ceiling Mounted, Metal, Weatherproof Back Box (System Sensor MWBBCW)	96.28	14.10
28 46 13 31-2453	EA	White, Wall Mounted, Metal, Weatherproof Back Box (System Sensor MWBBW)	88.04	14.10
28 46 13 31-2454	EA	Red Retrofit Plate (System Sensor RFP)	40.03	8.46
28 46 13 31-2455	EA	White Retrofit Plate (System Sensor RFPW)	39.69	8.46
28 46 13 31-2456	EA	Red, Wall Mounted, Weatherproof Back Box (System Sensor SA-WBB)	73.74	14.10
28 46 13 31-2457	EA	Red, Ceiling Mounted, Weatherproof Back Box (System Sensor SA-WBBC)	83.58	14.10
28 46 13 31-2458	EA	Red, Ceiling Mounted, Surface Mounted, Back Box (System Sensor SBBCRL)	57.72	14.10
28 46 13 31-2459	EA	White, Ceiling Mounted, Surface Mounted, Back Box (System Sensor SBBCWL)	57.72	14.10
28 46 13 31-2460	EA	Red, Wall Mounted, Surface Mounted, Back Box (System Sensor SBBRL)	49.37	14.10
28 46 13 31-2461	EA	Red, Wall Mounted, Surface Mounted, Back Box For Speaker (System Sensor SBBSPRL)	55.66	14.10
28 46 13 31-2462	EA	White, Wall Mounted, Surface Mounted, Back Box For Speaker (System Sensor SBBSPWL)	55.66	14.10
28 46 13 31-2463	EA	White, Wall Mounted, Surface Mounted, Back Box (System Sensor SBBWL)	49.37	14.10
28 46 13 31-2464	EA	Surface Mounted Box For Intelligent Control Or Monitor Modules (System Sensor SMB500)	55.54	14.10
28 46 13 31-2465	EA	Surface Mounted Box For 400 And 500 Series Detectors And Sounder Bases (System Sensor SMB600)	49.65	14.10
28 46 13 31-2466	EA	Red, Wall Mounted Horn/Strobe Trim Ring (System Sensor TR-HS)	17.82	5.64
28 46 13 31-2467	EA	Red Decals, Two Pack, Spectralert Advance Wall Products (System Sensor DECAL-R)	27.24	
28 46 13 31-2468	EA	Red Decals, Three Pack, Spectralert Advance Ceiling Products (System Sensor DECAL-RC)	38.13	
28 46 13 31-2469	EA	White Decals, Two Pack, Spectralert Advance Wall Products (System Sensor DECAL-W)	27.24	
28 46 13 31-2470	EA	White Decals, Three Pack, Spectralert Advance Wall Products (System Sensor DECAL-WC)	38.13	
28 46 13 31-2471	EA	Red, Wall Mounted, L-Series Trim Ring, Pack Of 5 (System Sensor TR-2)	19.91	5.64
28 46 13 31-2472	EA	White, Wall Mounted, L-Series Trim Ring, Pack Of 5 (System Sensor TR-2W)	19.91	5.64
28 46 13 31-2473	EA	Red, Ceiling Mounted, L-Series Trim Ring, Pack Of 5 (System Sensor TRC-2)	19.91	5.64
28 46 13 31-2474	EA	White, Ceiling Mounted, L-Series Trim Ring, Pack Of 5 (System Sensor TRC-2W)	19.91	5.64
28 46 13 31-2475	EA	Red, Wall/Surface Mounted, L-Series Compact Back Box (System Sensor SBBGRL)	49.37	14.10
28 46 13 31-2476	EA	White, Wall/Surface Mounted, L-Series Compact Back Box (System Sensor SBBGWL)	49.37	14.10
28 46 13 31-2477	EA	Red, AGENT Lettering, Compact, L-Series Wall Mounted Bezel (System Sensor BZGR-AG)	24.44	5.64
28 46 13 31-2478	EA	Red, ALERT Lettering, Compact, L-Series Wall Mounted Bezel (System Sensor BZGR-AL)	24.44	5.64
28 46 13 31-2479	EA	Red, EVAC Lettering, Compact, L-Series Wall Mounted Bezel (System Sensor BZGR-EV)	24.44	5.64
28 46 13 31-2480	EA	Red, FIRE Lettering, Compact, L-Series Wall Mounted Bezel (System Sensor BZGR-F)	24.44	5.64
28 46 13 31-2481	EA	White, AGENT Lettering, L-Series Wall Mounted Bezel (System Sensor BZGW-AG)	24.44	5.64
28 46 13 31-2482	EA	White, ALERT Lettering, L-Series Wall Mounted Bezel (System Sensor BZGW-AL)	24.44	5.64
28 46 13 31-2483	EA	White, EVAC Marking, L-Series Wall Mounted Bezel (System Sensor BZGW-EV)	24.44	5.64
28 46 13 31-2484	EA	White, FIRE Marking, L-Series Wall Mounted Bezel (System Sensor BZGW-F)	24.44	5.64
28 46 13 31-2485	EA	Red, Plain, L-Series Wall Mounted Bezel (System Sensor BZGR-P)	24.44	5.64
28 46 13 31-2486	EA	White, Plain, L-Series Wall Mounted Bezel (System Sensor BZGW-P)	24.44	5.64
28 46 13 31-2487	EA	Red, AGENT Marking, L-Series Wall Mounted Bezel (System Sensor BZR-AG)	24.44	5.64
28 46 13 31-2488	EA	Red, ALERT Marking, L-Series Wall Mounted Bezel (System Sensor BZR-AL)	24.44	5.64
28 46 13 31-2489	EA	Red, AGENT Marking, L-Series Ceiling Mounted Bezel (System Sensor BZRC-AG)	26.84	5.64
28 46 13 31-2490	EA	Red, ALERT Marking, L-Series Ceiling Mounted Bezel (System Sensor BZRC-AL)	26.84	5.64
28 46 13 31-2491	EA	Red, EVAC Marking, L-Series Ceiling Mounted Bezel (System Sensor BZRC-EV)	26.84	5.64
28 46 13 31-2492	EA	Red, FIRE Marking, L-Series Ceiling Mounted Bezel, Pack Of 5 (System Sensor BZRC-F)	26.84	5.64
28 46 13 31-2493	EA	Red, PLAIN Marking, L-Series Ceiling Mounted Bezel (System Sensor BZRC-P)	26.84	5.64
28 46 13 31-2494	EA	Red, EVAC Marking, L-Series Wall Mounted Bezel (System Sensor BZR-EV)	24.44	5.64
28 46 13 31-2495	EA	Red, FIRE Marking, L-Series Wall Mounted Bezel (System Sensor BZR-F)	24.44	5.64
28 46 13 31-2496	EA	Red, PLAIN Marking, L-Series Wall Mounted Bezel (System Sensor BZR-P)	24.44	5.64
28 46 13 31-2497	EA	Red, AGENT Marking, L-Series Wall Mounted Bezel (System Sensor BZR-AG)	24.44	5.64
28 46 13 31-2498	EA	White, AGENT Marking, L-Series Wall Mounted Bezel (System Sensor BZSPW-AG)	24.44	5.64
28 46 13 31-2499	EA	White, ALERT Marking, L-Series Wall Mounted Bezel (System Sensor BZSPW-AL)	24.44	5.64
28 46 13 31-2500	EA	White, AGENT Marking, L-Series Ceiling Mounted Bezel (System Sensor BZSPWC-AG)	26.84	5.64
28 46 13 31-2501	EA	White, ALERT Marking, L-Series Ceiling Mounted Bezel (System Sensor BZSPWC-AL)	26.84	5.64
28 46 13 31-2502	EA	White, EVAC Marking, L-Series Ceiling Mounted Bezel (System Sensor BZSPWC-EV)	26.84	5.64
28 46 13 31-2503	EA	White, FIRE Marking, L-Series Ceiling Mounted Bezel (System Sensor BZSPWC-F)	26.84	5.64
28 46 13 31-2504	EA	White, PLAIN Marking, L-Series Ceiling Mounted Bezel (System Sensor BZSPWC-P)	26.84	5.64
28 46 13 31-2505	EA	White, EVAC Marking, L-Series Wall Mounted Bezel (System Sensor BZSPW-EV)	24.44	5.64
28 46 13 31-2506	EA	White, FIRE Marking, L-Series Wall Mounted Bezel (System Sensor BZSPW-F)	24.44	5.64
28 46 13 31-2507	EA	Replacement Dust Cover For Low Profile Detectors (System Sensor C58-227-01)	5.09	
28 46 13 31-2508	EA	Control Module Barrier (System Sensor CB500)	36.60	8.46
28 46 13 31-2509	EA	White Detector Conversion Kit For SSD Intelligent Low Profile Photo, Ion, And Laser Detectors (System Sensor CK300)	33.51	8.46
28 46 13 31-2510	EA	Black Detector Conversion Kit For SSD Intelligent Low Profile Photo, Ion, And Laser Detectors (System Sensor CK300-BL)	40.89	8.46
28 46 13 31-2511	EA	PTIR Color Kit, White (System Sensor CK-300-IR) Note: Includes cover and trim ring	158.79	8.46
28 46 13 31-2512	EA	PTIR Color Kit, Black (System Sensor CK-300-IR-BL) Note: Includes cover and trim ring	231.45	8.46
28 46 13 31-2513	EA	PTIR Color Kit, Ivory (System Sensor CK-300-IR-IV) Note: Includes cover and trim ring	231.45	8.46
28 46 13 31-2514	EA	Accessory Flange Ring For B210LP Base (System Sensor F210) Note: Includes cover and trim ring	27.05	8.46
28 46 13 31-2515	EA	Black Faceplate (System Sensor FP-BLACK-BP)	26.22	8.46
28 46 13 31-2516	EA	White Faceplate, 2 In/2 Out (System Sensor FP-WHITE-2-BP)	26.65	8.46
28 46 13 31-2517	EA	White Faceplate (System Sensor FP-WHITE-BP)	25.24	8.46
28 46 13 31-2518	EA	White, Back Box (System Sensor SMB500-WH)	46.68	14.10
28 46 13 31-2519	EA	Accessory Flange Ring For B210LP Base, White (System Sensor TR300)	18.43	5.64
28 46 13 31-2520	EA	Accessory Flange Ring For B210LP Base, Ivory (System Sensor TR300-IV)	26.78	5.64
28 46 13 31-2521	EA	White Faceplate Swift (System Sensor FP-WHITE-SWIFT-BP)	27.99	8.46
28 46 13 31-2522	EA	Red, ALERT Marking, L-Series Wall Mounted Bezel For Speakers And Speaker Strobes (System Sensor BZSPR-AL)	24.44	5.64

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-2523	EA	Red, AGENT Marking, L-Series Ceiling Mounted Bezel For Speakers And Speaker Strobes (System Sensor BZSPRC-AG)	26.84	5.64
28 46 13 31-2524	EA	Red, ALERT Marking, L-Series Ceiling Mounted Bezel For Speakers And Speaker Strobes (System Sensor BZSPRC-AL)	26.84	5.64
28 46 13 31-2525	EA	Red, EVAC Marking, L-Series Ceiling Mounted Bezel For Speakers And Speaker Strobes (System Sensor BZSPRC-EV)	26.84	5.64
28 46 13 31-2526	EA	Red, FIRE Marking, L-Series Ceiling Mounted Bezel For Speakers And Speaker Strobes (System Sensor BZSPRC-F)	26.84	5.64
28 46 13 31-2527	EA	Red, Plain, L-Series Ceiling Mounted Bezel For Speakers And Speaker Strobes (System Sensor BZSPRC-P)	26.84	5.64
28 46 13 31-2528	EA	Red, EVAC Marking, L-Series Wall Mounted Bezel For Speakers And Speaker Strobes (System Sensor BZSPR-EV)	24.44	5.64
28 46 13 31-2529	EA	Red, FIRE Marking, L-Series Wall Mounted Bezel For Speakers And Speaker Strobes (System Sensor BZSPR-F)	24.44	5.64
28 46 13 31-2530	EA	Red, Plain, L-Series Wall Mounted Bezel For Speakers And Speaker Strobes (System Sensor BZSPR-P)	24.44	5.64
28 46 13 31-2531	EA	L Series, 120 VAC Adapter Mounting Plate (System Sensor MP120KL)	74.19	14.10
28 46 13 31-2532	EA	White, Amber Lens, Universal Expander Plate (System Sensor SEP-SPSWL-P)	149.77	14.10
28 46 13 31-2533		**Chimes** *(28 46 13 31-2216)*		
28 46 13 31-2534	EA	Red, 12/24 Volt DC, Ceiling Or Wall Mounted Chime (System Sensor CHRL)	180.03	42.30
28 46 13 31-2535	EA	White, 12/24 Volt DC, Ceiling Or Wall Mounted Chime (System Sensor CHWL)	157.25	42.30
28 46 13 31-2536		**Chime/Strobes** *(28 46 13 31-2216)*		
28 46 13 31-2537	EA	Red, 15, 15/75, 30, 75 , 110 Multi-Candela, 24 Volt DC, Ceiling Or Wall Mounted Chime/Strobe (System Sensor CHSRL)	233.34	42.30
28 46 13 31-2538	EA	White, 15, 15/75, 30, 75 , 110 Multi-Candela, 24 Volt DC, Ceiling Or Wall Mounted Chime/Strobe (System Sensor CHSWL)	233.34	42.30
28 46 13 31-2539	EA	L-Series, Red, 15, 30, 75, 95, 115, 150, 177 Multi-Candela, 24 Volt DC, Ceiling Mounted Chime/Strobe (System Sensor CHSCRL)	235.06	42.30
28 46 13 31-2540	EA	L-Series, White, 15, 30, 75, 95, 115, 150, 177 Multi-Candela, 24 Volt DC, Ceiling Mounted Chime/Strobe (System Sensor CHSCWL)	235.06	42.30
28 46 13 31-2541		**Carbon Monoxide Detectors** *(28 46 13 31-2216)*		
28 46 13 31-2542	EA	Conventional Carbon Monoxide Detector (System Sensor CO1224)	313.08	56.40
28 46 13 31-2543	EA	Round, Sounder And Trouble Relay With Test Function, 12/24 Volt DC, Conventional Carbon Monoxide Detector (System Sensor CO1224TR)	231.05	42.30
28 46 13 31-2544	EA	CO Detector Plate For Replacing Round CO Detectors With The CO1224T (System Sensor CO-PLATE)	18.19	5.64
28 46 13 31-2545	EA	Intelliquad Plus Intelligent Addressable Combination Multi-Criteria Fire And Carbon Monoxide Detector With Flashscan (System Sensor FCO-951)	351.19	42.30
28 46 13 31-2546	EA	12/24 VDC, Conventional Carbon Monoxide Detector With Sounder And Trouble Relay With Test Function, UL2075 Listed (System Sensor CO1224T)	259.25	56.40
28 46 13 31-2547	EA	Intelliquad Plus Intelligent Addressable Combination Multi-Criteria Fire And Carbon Monoxide Detector With Flashscan, Ivory (System Sensor FCO-951-IV)	363.77	42.30
28 46 13 31-2548		**Switches** *(28 46 13 31-2216)*		
28 46 13 31-2549	EA	SPDT Switch, 4 - 20 PSI, Waterflow Alarm Pressure Switch (System Sensor EPS10-1)	214.45	22.56
28 46 13 31-2550	EA	Two SPDT Switches, 4 - 20 PSI, Waterflow Alarm Pressure Switch (System Sensor EPS10-2)	240.20	22.56
28 46 13 31-2551	EA	SPDT Switch, 10 - 100 PSI, Waterflow Alarm Pressure Switch (System Sensor EPS40-1)	214.45	22.56
28 46 13 31-2552	EA	Two SPDT Switches, 10 - 100 PSI, Waterflow Alarm Pressure Switch (System Sensor EPS40-2)	240.20	22.56
28 46 13 31-2553	EA	Outside Screw And Yoke Valve, Two SPDT, Supervisory Switch (System Sensor OSY2)	223.61	22.56
28 46 13 31-2554	EA	Post Indicator Butterfly Valve, SPDT, Supervisory Switch (System Sensor PIBV2)	208.73	22.56
28 46 13 31-2555		**Low Frequency Sounders** *(28 46 13 31-2216)*		
28 46 13 31-2556	EA	Red, Low Frequency Sounder (System Sensor HR-LF)	217.88	42.30
28 46 13 31-2557	EA	White, Low Frequency Sounder (System Sensor HW-LF)	217.88	42.30
28 46 13 31-2558	EA	Red, Ceiling Mounted, Low-frequency Compact Sounder (System Sensor HCRL-LF)	189.00	42.30
28 46 13 31-2559	EA	White, Ceiling Mounted, Low-frequency Compact Sounder (System Sensor HCWL-LF)	189.00	42.30
28 46 13 31-2560	EA	Red, Wall Mounted, Low-frequency Compact Sounder (System Sensor HGRL-LF)	187.57	42.30
28 46 13 31-2561	EA	White, Wall Mounted, Low-frequency Compact Sounder (HGWL-LF)	187.57	42.30
28 46 13 31-2562		**Sync Modules** *(28 46 13 31-2216)*		
28 46 13 31-2563	EA	Red, 12/24 Volt DC, Sync Module (System Sensor MDL3R)	167.95	28.20
28 46 13 31-2564	EA	White, 12/24 Volt DC, Sync Module (System Sensor MDL3W)	165.09	28.20
28 46 13 31-2565		**Relays** *(28 46 13 31-2216)*		
28 46 13 31-2566	EA	Metal Enclosure, SPDT, Track Mounted, Multivoltage, Relay (System Sensor R-10E)	93.40	22.56
28 46 13 31-2567	EA	SPDT, Track Mounted, Multivoltage, Relay (System Sensor R-10T)	60.35	14.10
28 46 13 31-2568	EA	4-Gang Relay, Metal Enclosure, SPDT, Track Mounted, Multivoltage, Relay (System Sensor R-14E)	182.66	14.10
28 46 13 31-2569	EA	4-Gang Relay, SPDT, Track Mounted, Multivoltage, Relay (System Sensor R-14T)	133.46	14.10
28 46 13 31-2570	EA	Metal Enclosure, DPDT, Track Mounted, Multivoltage, Relay (System Sensor R-20E)	101.07	22.56
28 46 13 31-2571	EA	DPDT, Track Mounted, Multivoltage, Relay (System Sensor R-20T)	62.41	14.10
28 46 13 31-2572	EA	4-Gang Relay, Metal Enclosure, DPDT, Track Mounted, Multivoltage, Relay (System Sensor R-24E)	206.12	14.10
28 46 13 31-2573	EA	4-Gang Relay, DPDT, Track Mounted, Multivoltage, Relay (System Sensor R-24T)	153.20	14.10
28 46 13 31-2574	EA	18 To 35 Volt DC, 18 To 35 Volt AC, 120 Volt AC, SPDT Multivoltage Relay (System Sensor PR-1)	52.00	14.10
28 46 13 31-2575	EA	10 To 40 Volt DC, SPDT Multivoltage Relay (System Sensor PR-2)	52.00	14.10

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-2576	EA	Redundant Power Input, 10 To 40 Volt DC, SPDT Multivoltage Relay (System Sensor PR-3)	52.00	14.10
28 46 13 31-2577		**Remote Annunciator** *(28 46 13 31-2216)*		
28 46 13 31-2578	EA	Remote Annunciator (System Sensor RA100Z)	120.64	42.30
28 46 13 31-2579	EA	Remote LED Annunciator (System Sensor RA100ZA)	117.73	42.30
28 46 13 31-2580	EA	Remote Annunciator With Piezo Alarm (System Sensor APA151)	150.13	42.30
28 46 13 31-2581		**Remote Test Station** *(28 46 13 31-2216)*		
28 46 13 31-2582	EA	Remote Test Station With Key (System Sensor RTS151KEY)	195.01	42.30
28 46 13 31-2583		**Fire Alarm Digital Cellular Communicator** *(28 46 13 31)*		
28 46 13 31-2584	EA	Digital Cellular Communicator With Antenna And Red Enclosure (Telular Telguard TG-7FS)	783.12	56.40
28 46 13 31-2585		**Wheelock Fire Alarm** *(28 46 13 31)*		
28 46 13 31-2586		**Ceiling Mounted Chimes/Strobes** *(28 46 13 31-2585)*		
28 46 13 31-2587	EA	White, Round, Selectable Candela (15, 30, 75, 100 Candela), 24 Volt DC, Ceiling Mounted Chime/Strobe (Wheelock CH90-24MCC-FW)	259.18	42.30
28 46 13 31-2588		**Wall Mounted Chimes/Strobes** *(28 46 13 31-2585)*		
28 46 13 31-2589	EA	Red, Selectable Candela (15, 30, 75, 110 Candela), 24 Volt DC, Wall Mounted Chime/Strobe (Wheelock CH70-24MCW-FR)	259.18	42.30
28 46 13 31-2590	EA	White, Selectable Candela (15, 30, 75, 110 Candela), 24 Volt DC, Wall Mounted Chime/Strobe (Wheelock CH70-24MCW-FW)	259.18	42.30
28 46 13 31-2591		**Ceiling Mounted Horns/Strobes** *(28 46 13 31-2585)*		
28 46 13 31-2592	EA	Red, Two Wire, 12/24 Volt DC, Multi-Candela, Ceiling Mounted Horn/Strobe (Wheelock HSRC)	164.87	42.30
28 46 13 31-2593	EA	White, Two Wire, 12/24 Volt DC, Multi-Candela, Ceiling Mounted Horn/Strobe (Wheelock HSWC)	189.29	42.30
28 46 13 31-2594		**Wall Mounted Horns/Strobes** *(28 46 13 31-2585)*		
28 46 13 31-2595	EA	Red, Weatherproof, 24 Volt DC, 75 Candela, Wall Mounted, Horn/Strobe (Wheelock ASWP-2475W-FR)	168.60	42.30
28 46 13 31-2596	EA	Red, 24 Volt DC, 15/75 Candela, Continuous Or Code 3 Tone, Wall Mounted Horn/Strobe (Wheelock HS4-241575 Watt-FR)	279.39	42.30
28 46 13 31-2597	EA	Red, 24 Volt DC, Selectable Candela (15, 30, 75, 110 Candela), Wall Mounted Horn/Strobe (Wheelock HS4-24MCW-FR)	229.34	42.30
28 46 13 31-2598	EA	White, 24 Volt DC, Selectable Candela (15, 30, 75, 110 Candela), Wall Mounted Horn/Strobe (Wheelock HS4-24MCW-FW)	229.34	42.30
28 46 13 31-2599	EA	Red, Flush, 24 Volt AC, 15/75 Candela, Sync/Non-Sync, Wall Mounted Horn/Strobe (Wheelock MT-241575 Watt-FR)	264.02	42.30
28 46 13 31-2600	EA	Red, 24 Volt AC, Multi-Candela, Wall Mounted Horn/Strobe (Wheelock MT-24MCW-FR)	189.88	42.30
28 46 13 31-2601	EA	Red, 115 Volt AC, Wall Mounted Horn/Strobe (Wheelock MT4-115-WH-VFR)	187.68	42.30
28 46 13 31-2602	EA	Red, Weatherproof, 24 Volt DC, 75 Candela, Wall Mounted Horn/Strobe (Wheelock MTWP-2475W-FR)	206.86	47.94
28 46 13 31-2603	EA	Red, Two Wire, 12/24 Volt DC, Multi-Candela, Wall Mounted Horn/Strobe (Wheelock HSR)	167.73	42.30
28 46 13 31-2604	EA	White, Two Wire, 12/24 Volt DC, Multi-Candela, Wall Mounted Horn/Strobe (Wheelock HSW)	167.73	42.30
28 46 13 31-2605	EA	White, 24 Volt AC, Multi-Candela, Wall Mounted Horn/Strobe (Wheelock MT-24MCW-FW)	186.81	42.30
28 46 13 31-2606	EA	Red, 24 Volt DC, 15/30/75/110 Selectable Candela, Wall Mounted Horn/Strobe (Wheelock HS4-24MCW-FR)	229.34	42.30
28 46 13 31-2607	EA	White, 24 Volt DC, 15/30/75/110 Selectable Candela, Wall Mounted Horn/Strobe (Wheelock HS4-24MCW-FW)	229.34	42.30
28 46 13 31-2608		**Ceiling Mounted Strobes** *(28 46 13 31-2585)*		
28 46 13 31-2609	EA	Red, 24 Volt DC, Multi-Candela (15, 30, 75, 95 Candela), Ceiling Mounted Strobe (Wheelock RSS-24MCC-FR)	156.98	42.30
28 46 13 31-2610	EA	White, 24 Volt DC, Multi-Candela (15, 30, 75, 95 Candela), Ceiling Mounted Strobe (Wheelock RSS-24MCC-FW)	156.98	42.30
28 46 13 31-2611	EA	Red, Two Wire, 12/24 Volt DC, Multi-Candela, Ceiling Mounted Strobe (Wheelock STRC)	170.41	42.30
28 46 13 31-2612	EA	White, Two Wire, 12/24 Volt DC, Multi-Candela, Ceiling Mounted Strobe (Wheelock STWC)	150.40	42.30
28 46 13 31-2613	EA	White, 24 Volt DC, Amber Lens, Multi- Candela (15, 30, 75, 95 Candela), Ceiling Mounted Strobe, No Lettering (Wheelock RSSA-24MCC-NW)	168.38	42.30
28 46 13 31-2614	EA	White, 24 Volt DC, Amber Lens, Multi-Candela (15, 30, 75, 95 Candela), Ceiling Mounted Strobe, Red ALERT Lettering (Wheelock RSSA-24MCC-ALW)	169.92	42.30
28 46 13 31-2615	EA	White, 24 Volt DC, Multi-Candela (15, 30, 75, 95 Candela), Ceiling Mounted Strobe With Fire Lettering (Wheelock RSS-24MCCH-FW)	170.58	42.30
28 46 13 31-2616	EA	Red, 24 Volt DC, Multi-Candela (15, 30, 75, 95 Candela), Ceiling Mounted Weatherproof Strobe With Fire Lettering (Wheelock RSSWP-2475C-FR)	179.28	42.30
28 46 13 31-2617		**Wall Mounted Strobes** *(28 46 13 31-2585)*		
28 46 13 31-2618	EA	Red, Multi-Candela, 24 Volt DC, Wall Mounted Strobe (Wheelock AMT-24MCW-FR)	242.95	42.30
28 46 13 31-2619	EA	Red, Retrofit Plate, 12 Volt DC, 15/75 Candela, Wall Mounted Strobe (Wheelock RSSP-121575W-FR)	193.39	42.30
28 46 13 31-2620	EA	Red, 24 Volt DC, 15/75 Candela, Wall Mounted Strobe (Wheelock RSS-241575W-FR)	219.59	42.30
28 46 13 31-2621	EA	Red, 24 Volt DC, Multi-Candela (15, 30, 75, 95 Candela), Wall Mounted Strobe (Wheelock RSS-24MCW-FR)	155.22	42.30
28 46 13 31-2622	EA	White, 24 Volt DC, Multi-Candela (15, 30, 75, 95 Candela), Wall Mounted Strobe (Wheelock RSS-24MCW-FW)	155.22	42.30
28 46 13 31-2623	EA	Red, Retrofit Plate, 24 Volt DC, Multi-Candela (15, 30, 75, 95 Candela), Wall Mounted Strobe (Wheelock RSSP-24MCW-FR)	166.63	42.30

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-2624	EA	Outdoor, Red, 24 Volt DC, 75 Candela, Wall Mounted Strobe (Wheelock RSSWP-2475W-FR) Note: Requires WPSBB-R.	173.08	47.94
28 46 13 31-2625	EA	Red, Two Wire, 12/24 Volt DC, Multi-Candela, Wall Mounted Strobe (Wheelock STR)	151.49	42.30
28 46 13 31-2626	EA	White, Two Wire, 12/24 Volt DC, Multi-Candela, Wall Mounted Strobe (Wheelock STW)	151.49	42.30
28 46 13 31-2627	EA	Interior, White, 24 Volt DC, Multi-Candela 135/185, Wall Mounted Strobe, No Lettering (Wheelock RSS-24MCWH-NW)	181.98	42.30
28 46 13 31-2628	EA	White, 24 Volt DC, Multi-Candela (15, 30, 75, 110 Candela), Wall Mounted Strobe, No Lettering (Wheelock RSS-24MCW-NW)	157.20	42.30
28 46 13 31-2629	EA	Weatherproof, White, 24 Volt DC, 75 Candela, Wall Mounted Strobe (Wheelock RSSWP-2475W-FW) Note: Requires WPSBB-R.	194.28	47.94
28 46 13 31-2630	EA	Interior, White, 24 Volt DC, Multi-Candela 135/185, Weatherproof Wall Mounted Strobe (Wheelock RSSWP-24MCWH-FW)	193.01	42.30

28 46 13 31-2631 Ceiling Mounted Speakers/Strobes *(28 46 13 31-2585)*

28 46 13 31-2632	EA	Red, 24 Volt DC, Selectable Candela (15, 30, 75, 110 Candela), Ceiling Mounted Speaker/Strobe (Wheelock E60-24MCC-FR)	193.39	42.30
28 46 13 31-2633	EA	White, 24 Volt DC, Selectable Candela (15, 30, 75, 110 Candela), Ceiling Mounted Speaker/Strobe (Wheelock E60-24MCC-FW)	193.39	42.30
28 46 13 31-2634	EA	White, 24 Volt DC, Selectable Candela (15, 30, 75, 110 Candela), Ceiling Mounted Speaker/Strobe (Wheelock E70-24MCC-FW)	193.39	42.30
28 46 13 31-2635	EA	White, 24 Volt DC, Multi-Candela (15, 30, 75, 110 Candela), Ceiling Mounted Speaker/Strobe (Wheelock E90-24MCC-FW)	195.58	42.30
28 46 13 31-2636	EA	White, 24 Volt DC, Multi-Candela 115/177, Ceiling Mounted Speaker/Strobe (Wheelock E90-24MCCH-FW)	207.86	42.30
28 46 13 31-2637	EA	White, 24 Volt DC, Multi-Candela (15, 30, 75, 95 Candela), Ceiling Mounted Speaker/Strobe (Wheelock ET90-24MCC-FW)	224.97	42.30
28 46 13 31-2638	EA	Red, 24 Volt DC, Multi-Candela (15, 30, 75, 95 Candela), Ceiling Mounted Speaker/Strobe (Wheelock ET90-24MCC-FR)	224.97	42.30
28 46 13 31-2639	EA	Red, 24 Volt DC, Multi-Candela (15, 30, 75, 110 Candela), Ceiling Mounted Speaker/Strobe (Wheelock E90-24MCC-FR)	197.33	42.30
28 46 13 31-2640	EA	White, 2 Watts, 24 Volt DC, 15/30/75/95 Candela, Square, No Lettering, Ceiling Mounted Speaker/Strobe (Wheelock E70-24MCC-NW)	217.89	42.30
28 46 13 31-2641	EA	Round, 2 Watt, 24 Volt DC, 15/30/75/95CD, No Lettering, Ceiling Mounted Speaker/Strobe (Wheelock E90-24MCC-NW)	231.62	42.30
28 46 13 31-2642	EA	White, 8 Watts, 24 Volt DC, 75 Candela, Weatherproof, Ceiling Mounted, Speaker/Strobe (Wheelock ET70WP-2475C-FW)	245.35	42.30

28 46 13 31-2643 Wall Mounted Speakers/Strobes *(28 46 13 31-2585)*

28 46 13 31-2644	EA	Red, Square, 24 Volt DC, 15/75 Candela, 25/70.7 VRMS, Wall Mounted Speaker/Strobe (Wheelock E50-241575 Watt-FR)	308.44	42.30
28 46 13 31-2645	EA	White, Square, 24 Volt DC, 15/75 Candela, 25/70.7 VRMS, Wall Mounted Speaker/Strobe (Wheelock E50-241575 Watt-FW)	308.44	42.30
28 46 13 31-2646	EA	Red, 24 Volt DC, Multi-Candela 115/177, Wall Mounted Speaker/Strobe (Wheelock E60-24MCCH-FR)	207.86	42.30
28 46 13 31-2647	EA	White, 24 Volt DC, Multi-Candela 115/177, Wall Mounted Speaker/Strobe (Wheelock E60-24MCCH-FW)	207.86	42.30
28 46 13 31-2648	EA	Red, Square, 24 Volt DC, Selectable Candela 15/30/75/110, Wall Mounted Speaker/Strobe (Wheelock E50-24MCW-FR)	193.39	42.30
28 46 13 31-2649	EA	White, Square, 24 Volt DC, Selectable Candela 15/30/75/110, Wall Mounted Speaker/Strobe (Wheelock E50-24MCW-FW)	189.88	42.30
28 46 13 31-2650	EA	Red, 24 Volt DC, Multi-Candela 135/185, Wall Mounted Speaker/Strobe (Wheelock E50-24MCWH-FR)	207.86	42.30
28 46 13 31-2651	EA	White, 24 Volt DC, Multi-Candela 135/185, Wall Mounted Speaker/Strobe (Wheelock E50-24MCWH-FW)	207.86	42.30
28 46 13 31-2652	EA	Red, Square, 24 Volt DC, 15/75 Candela, 25/70.7 VRMS, Wall Mounted Speaker/Strobe (Wheelock E70-241575 Watt-FR)	305.02	42.30
28 46 13 31-2653	EA	Red, Square, 24 Volt DC, Selectable Candela 15/30/75/110, Wall Mounted Speaker/Strobe (Wheelock E70-24MCW-FR)	195.58	42.30
28 46 13 31-2654	EA	White, Square, 24 Volt DC, Selectable Candela 15/30/75/110, Wall Mounted Speaker/Strobe (Wheelock E70-24MCW-FW)	193.83	42.30
28 46 13 31-2655	EA	Red, 24 Volt DC, Multi-Candela 135/185, Wall Mounted Speaker/Strobe (Wheelock E70-24MCWH-FR)	297.34	42.30
28 46 13 31-2656	EA	White, 24 Volt DC, Multi-Candela 135/185, Wall Mounted Speaker/Strobe (Wheelock E70-24MCWH-FW)	305.02	42.30
28 46 13 31-2657	EA	Red, 24 Volt DC, Selectable Candela 15/30/75/110, Wall Mounted Speaker/Strobe (Wheelock ET70-24MCW-FR)	224.97	42.30
28 46 13 31-2658	EA	White, 24 Volt DC, Selectable Candela 15/30/75/110, Wall Mounted Speaker/Strobe (Wheelock ET70-24MCW-FW)	224.97	42.30
28 46 13 31-2659	EA	Weatherproof, Red, 24 Volt DC, 75 Candela, Wall Mounted Speaker Strobe/(Wheelock ET70WP-2475 W-FR) Note: Requires weatherproof backbox (IOB).	330.83	47.94
28 46 13 31-2660	EA	Interior, Red, 24 Volt DC, Multi-Candela 135/185, Wall Mounted Speaker/Strobe (Wheelock RSS-24MCWH-FR)	177.16	42.30
28 46 13 31-2661	EA	Interior, White, 24 Volt DC, Multi-Candela 135/185, Wall Mounted Speaker/Strobe (Wheelock RSS-24MCWH-FW)	170.58	42.30
28 46 13 31-2662	EA	White, 2 Watts, 24 Volt DC, 15/30/75/95 Candela, Round, Wall Mounted Speaker/Strobe (Wheelock E60-24MCW-FW)	231.62	42.30
28 46 13 31-2663	EA	Red, 24 Volt DC, 135/185 Multi-Candela, Wall Mounted Speaker/Strobe (Wheelock E70-24MCWH-FR)	245.35	42.30
28 46 13 31-2664	EA	White, 24 Volt DC, 135/185 Multi-Candela, Wall Mounted Speaker/Strobe (Wheelock E70-24MCWH-FW)	250.50	42.30
28 46 13 31-2665	EA	White, 8 Watt, 24 VDC, 15/30/75/110 Candela, No Lettering, Wall Mounted, Speaker/Strobe (Wheelock ET70-24MCW-NW)	259.08	42.30
28 46 13 31-2666	EA	Red, 8 Watts, Weatherproof, 185 Candela, Wall Mounted, Speaker/Strobe (Wheelock ET70WP-24185W-FR)	265.38	42.30
28 46 13 31-2667	EA	Red, 24 Volt DC, 75 Candela, Weatherproof, Wall Mounted, Speaker/Strobe (Wheelock ET70WP-2475W-FR) Note: Requires IOB	261.37	42.30
28 46 13 31-2668	EA	White, 8 Watts, 24 Volt DC, 75 Candela, Weatherproof, Wall Mounted, Speaker/Strobe (Wheelock ET70WP-2475W-FW) Note: Requires IOB	259.08	42.30

28 46 13 31-2669 Electric Alarm Bells *(28 46 13 31-2585)*

28 46 13 31-2670	EA	6" Diameter, 24 Volt DC, Red, Vibrating Bell (Wheelock 43T-G6-24-R)	188.12	42.30
28 46 13 31-2671	EA	6" Diameter, 115 Volt AC, Red, Vibrating Bell (Wheelock 43T-G6-115-R)	181.10	42.30

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-2672	EA	10" Diameter, 115 Volt AC, Red, Vibrating Bell (Wheelock 43T-G10-115-R)	228.04	42.30
28 46 13 31-2673	EA	10" Diameter, 115 Volt AC, Single Stroke, Red, Explosion Proof Bell (Wheelock CSX10-115-R)	1,846.99	47.94
28 46 13 31-2674	EA	10" Diameter, Outdoor, 115 Volt AC, Single Stroke, Red, Explosion Proof Bell (Wheelock CSXG10-115-R)	2,991.00	47.94
28 46 13 31-2675	EA	10" Diameter, Vibrating, Outdoor, 115 Volt AC, Single Stroke, Red, Explosion Proof Bell (Wheelock CVXG10-115-R)	3,470.60	47.94
28 46 13 31-2676	EA	6", ADA, 24 Volt DC, Red, Motor Bell (Wheelock MB-G6-24-R)	148.42	42.30
28 46 13 31-2677	EA	10", ADA, 24 Volt DC, Red, Motor Bell (Wheelock MB-G10-24-R)	203.59	42.30
28 46 13 31-2678	EA	6", ADA, 12 Volt DC, Red, Motor Bell (Wheelock MB-G6-12-R)	151.06	42.30
28 46 13 31-2679	EA	10", ADA, 12 Volt DC, Red, Indoor/Outdoor Motor Bell (Wheelock MB-G10-12-R)	201.59	42.30
28 46 13 31-2680		**Horns** *(28 46 13 31-2585)*		
28 46 13 31-2681	EA	Two Wire, 24 Volt DC, Indoor Or Outdoor, Continuous Or Code 3, Sync Or Non-Sync Horn (Wheelock AH-24WP-R)	152.95	42.30
28 46 13 31-2682	EA	Red, Two Wire, 12/24 Volt DC, Wall Mounted Horn (Wheelock HNR)	123.73	42.30
28 46 13 31-2683	EA	White, Two Wire, 12/24 Volt DC, Wall Mounted Horn (Wheelock HNW)	123.73	42.30
28 46 13 31-2684	EA	Red, Two Wire, 12/24 Volt DC, Ceiling Mounted Horn (Wheelock HNRC)	124.69	42.30
28 46 13 31-2685	EA	White, Two Wire, 12/24 Volt DC, Ceiling Mounted Horn (Wheelock HNWC)	124.69	42.30
28 46 13 31-2686	EA	Red, 24 Volt DC, Sync With Built-In Temporal, Mini-Horn (Wheelock MIZ-24S-R)	108.46	42.30
28 46 13 31-2687	EA	White, 24 Volt DC, Sync With Built-In Temporal, Mini-Horn (Wheelock MIZ-24S-W)	108.46	42.30
28 46 13 31-2688	EA	Red, Flush, 12/24 Volt AC, Horn (Wheelock MT-12/24-R)	124.69	42.30
28 46 13 31-2689	EA	Red, 24 Volt DC, Four Wire, Wall Mounted Horn (Wheelock HS-24-R)	149.82	42.30
28 46 13 31-2690		**Speakers** *(28 46 13 31-2585)*		
28 46 13 31-2691	EA	Red, Square, 25 Or 70.7 VRMS, 1/8 To 2 Watt, Wall Mounted Speaker (Wheelock E50-R)	127.50	42.30
28 46 13 31-2692	EA	White, Square, 25 Or 70.7 VRMS, 1/8 To 2 Watt, Wall Mounted Speaker (Wheelock E50-W)	127.50	42.30
28 46 13 31-2693	EA	Red, Square, 25 Or 70.7 VRMS, 1/8 To 2 Watt, Ceiling Mounted Speaker (Wheelock E60-R)	127.50	42.30
28 46 13 31-2694	EA	White, Square, 25 Or 70.7 VRMS, 1/8 To 2 Watt, Ceiling Mounted Speaker (Wheelock E60-W)	125.57	42.30
28 46 13 31-2695	EA	Red, Flush, Square, 25 Or 70.7 VRMS, 1/8 To 2 Watt, Wall Or Ceiling Mounted Speaker (Wheelock E70-R)	127.50	42.30
28 46 13 31-2696	EA	White, Flush, Square, 25 Or 70.7 VRMS, 1/8 To 2 Watt, Wall Or Ceiling Mounted Speaker (Wheelock E70-W)	127.50	42.30
28 46 13 31-2697	EA	Red, Round, 25 Or 70.7 VRMS, 1/8 To 2 Watt, Wall Or Ceiling Mounted Speaker (Wheelock E90-R)	127.50	42.30
28 46 13 31-2698	EA	White, Round, 25 Or 70.7 VRMS, 1/8 To 2 Watt, Wall Or Ceiling Mounted Speaker (Wheelock E90-W)	127.50	42.30
28 46 13 31-2699	EA	Red, Flush Or Surface, Square, 1/8 - 8 Watt, Wall Mounted Speaker (Wheelock ET70-R)	148.64	42.30
28 46 13 31-2700	EA	White, Flush Or Surface, Square, 1/8 - 8 Watt, Wall Mounted Speaker (Wheelock ET70-W)	148.64	42.30
28 46 13 31-2701	EA	White, Round, 25 Or 70.7 VRMS, 1/8 - 8 Watt Ceiling Mounted Speaker (Wheelock ET90-W)	150.40	42.30
28 46 13 31-2702	EA	Red, Surface Mounted, Vandal Resistant, Square, 1/8 - 8 Watt, Wall Or Ceiling Mounted Speaker (Wheelock ET-1010-R)	203.02	42.30
28 46 13 31-2703	EA	Red, Flush Mounted, Vandal Resistant, Square, 1/8 - 8 Watt, Wall Or Ceiling Mounted Speaker (Wheelock ET-1080-R)	183.00	42.30
28 46 13 31-2704	EA	Grey, 1 To 15 Watt, 25/70/100 Volt Transformer, Loud Speaker (Wheelock STH-15S)	286.38	42.30
28 46 13 31-2705	EA	Red, 1 To 15 Watt, 25/70/100 Volt Transformer, Loud Speaker (Wheelock STH-15SR)	286.38	42.30
28 46 13 31-2706	EA	Red, 1/8 To 8 Watts, Square, Surface Mounted, Vandal Resistant Speaker (Wheelock ET-1010-R)	203.02	42.30
28 46 13 31-2707	EA	White, 8 Watts, Wall/Ceiling Mounted, Vandal Resistant Speaker (Wheelock ET-1010-W)	205.31	42.30
28 46 13 31-2708	EA	Red, 1/8 To 8 Watts, Square, Flush Mounted, Vandal Resistant Speaker (Wheelock ET-1080-R)	183.00	42.30
28 46 13 31-2709	EA	White, 8", 25/70 Volt, 15/30/75/95 Candela, Round, Ceiling Mounted, Speaker (Wheelock S8-24MCC-FW)	273.96	42.30
28 46 13 31-2710	EA	White, 8", 25/70 Volt, Round, Ceiling Mounted, Speaker (Wheelock S8-70/25)	196.73	42.30
28 46 13 31-2711		**Sync Modules** *(28 46 13 31-2585)*		
28 46 13 31-2712	EA	12 Or 24 Volt DC, Single Circuit Class B, Sync Module (Wheelock SM-12/24-R)	189.68	28.20
28 46 13 31-2713		**Boxes, Plates And Rings** *(28 46 13 31-2585)*		
28 46 13 31-2714	EA	4" Square, Red, Surface Back Box (Wheelock BB-R)	37.81	14.10
28 46 13 31-2715	EA	Standard 4" Square Box (Wheelock BB-STD)	37.12	14.10
28 46 13 31-2716	EA	Black, Back Box For UZC-256 (Wheelock BB-UZC)	241.18	28.20
28 46 13 31-2717	EA	Red, Back Box For UZC-256 (Wheelock BB-UZC-R)	241.18	28.20
28 46 13 31-2718	EA	9" x 12" x 2.75", For Two XP Boards, Surface Mounted Cabinet (Wheelock BB-XP)	185.85	22.56
28 46 13 31-2719	EA	Red, Extender Ring For E60 Series (Wheelock E60EXT-R)	19.88	5.64
28 46 13 31-2720	EA	White, Extender Ring For E60 Series (Wheelock E60EXT-W)	19.88	5.64
28 46 13 31-2721	EA	Red, Surface Mounted Back Box For E50 Speakers (Wheelock E50SB-R)	48.20	14.10
28 46 13 31-2722	EA	White, Surface Mounted Back Box For E50 Speakers (Wheelock E50SB-W)	45.40	14.10
28 46 13 31-2723	EA	Red, Surface Mounted Back Box For E50 Speaker Strobe (Wheelock E50SSB-R)	48.20	14.10
28 46 13 31-2724	EA	White, Surface Mounted Back Box For E50 Speaker Strobe (Wheelock E50SSB-W)	48.20	14.10
28 46 13 31-2725	EA	4" Square Back Box (Wheelock DBB-R)	39.60	14.10
28 46 13 31-2726	EA	Red, Surface Back Box (Wheelock IOB-R)	46.36	14.10
28 46 13 31-2727	EA	White, Surface, Back Box (Wheelock IOB-W)	46.36	14.10
28 46 13 31-2728	EA	White, Indoor, Surface Extender (Wheelock ISP2-W)	18.96	5.64
28 46 13 31-2729	EA	Red, RS/RSS Strobe Trim Plate (Wheelock NATP-R)	25.80	5.64
28 46 13 31-2730	EA	White, RS/RSS Strobe Trim Plate (Wheelock NATP-W)	25.80	5.64
28 46 13 31-2731	EA	Red Retrofit Plate (Wheelock RP-R)	22.68	5.64
28 46 13 31-2732	EA	4" Speaker/Strobe Ceiling Tile Support Bracket (Wheelock SSB-4)	40.23	5.64
28 46 13 31-2733	EA	Red, Surface Mounted, Back Box For Chimes, Speakers (Wheelock SBB-R)	48.64	14.10
28 46 13 31-2734	EA	White, Surface Mounted, Back Box For Chimes, Speaker (Wheelock SBB-W)	49.26	14.10
28 46 13 31-2735	EA	Red, Surface Mounted, Back Box For With RSSP (Wheelock SBL2-R)	52.50	14.10
28 46 13 31-2736	EA	Red, Semi-Flush Plate (Wheelock SFB-R)	27.09	5.64
28 46 13 31-2737	EA	White, Semi-Flush Plate (Wheelock SFB-W)	27.09	5.64
28 46 13 31-2738	EA	Red, Shallow Surface Mounted, Back Box (Wheelock SHBB-R)	42.54	14.10
28 46 13 31-2739	EA	White, Shallow Surface Mounted, Back Box (Wheelock SHBB-W)	42.54	14.10
28 46 13 31-2740	EA	Red, Adapter Plate For Mounting Sth-15S And Sth-15SR (Wheelock SHMP-R)	28.48	5.64

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-2741	EA	Red, Weather Resistant Back Box (Wheelock WBB-R)	47.85	14.10
28 46 13 31-2742	EA	Silver, Weather Resistant Back Box (Wheelock WBB-S)	47.85	14.10
28 46 13 31-2743	EA	White, Weather Resistant Back Box (Wheelock WBB-W)	47.85	14.10
28 46 13 31-2744	EA	Red, Flush Outdoor Mounting Plate For RS, ET, AH And MT Series (Wheelock WFP-R)	35.14	5.64
28 46 13 31-2745	EA	White, Flush Outdoor Mounting Plate For RS, ET, AH And MT Series (Wheelock WFP-W)	35.14	5.64
28 46 13 31-2746	EA	Red, Flush Outdoor Mounting Plate For ASWP Series (Wheelock WFPA-R)	35.14	5.64
28 46 13 31-2747	EA	White, Flush Outdoor Mounting Plate For ASWP Series (Wheelock WFPA-W)	35.14	5.64
28 46 13 31-2748	EA	Gasket Kit For Rear Wiring To Outdoor Back Box (Wheelock WP-KIT)	23.81	5.64
28 46 13 31-2749	EA	Weather Resistant Back Box For ASWP (Wheelock WPBB-R)	59.32	14.10
28 46 13 31-2750	EA	Weather Resistant Back Box For RSSWP (Wheelock WPSBB-R)	54.29	14.10
28 46 13 31-2751	EA	Red Plate For RSS (Wheelock RSSCP-R)	18.96	5.64
28 46 13 31-2752	EA	White Plate For RSS (Wheelock RSSCP-W)	18.96	5.64
28 46 13 31-2753	EA	Red Fire Plate For RSS (Wheelock RSSCPW-FR)	19.88	5.64
28 46 13 31-2754	EA	White Fire Plate For RSS (Wheelock RSSCPW-FW)	19.88	5.64
28 46 13 31-2755	EA	Red, Indoor, Surface Extender (Wheelock ISP2-R)	19.35	5.64
28 46 13 31-2756	EA	Red, 24 Volt DC, 135/185 Candela, Wall Mounted Strobe Plate (Wheelock RSSP-24MCHW-FR)	148.58	5.64
28 46 13 31-2757	EA	White, 24 Volt DC, 15/30/75/110 Candela, Amber Lens, Ceiling Mounted Strobe Plate (Wheelock RSSPA-24MCC-ALW)	133.13	5.64
28 46 13 31-2758	EA	White, 24 Volt DC, 15/30/75/110 Candela, Amber Lens, No Lettering, Ceiling Mounted Strobe Plate (Wheelock RSSPA-24MCC-NW)	130.84	5.64
28 46 13 31-2759	EA	White, 24 Volt DC, 15/30/75/110 Candela, Amber Lens, ALERT Lettering, Wall Mounted Strobe Plate (Wheelock RSSPA-24MCW-ALW)	133.13	5.64
28 46 13 31-2760	EA	Red, Square Grill Plate For CH70, E70, ET70 (Wheelock ECHG70-R)	21.98	5.64
28 46 13 31-2761	EA	White, Square Grill Plate For CH70, E70, ET70 (Wheelock ECHG70-W)	21.29	5.64
28 46 13 31-2762	EA	Red, Round Grill Plate For CH70, E70, ET70 (Wheelock ECHG90-R)	22.49	5.64
28 46 13 31-2763	EA	White, Round Grill Plate For CH70, E70, ET70 (Wheelock ECHG90-W)	22.49	5.64
28 46 13 31-2764	EA	White, Fire Lettered, Grill Plate For E50 Speaker/Strobe (Wheelock ECHSG50-FW)	21.29	5.64
28 46 13 31-2765	EA	Red, Square, Fire Lettered, Grill Plate For CH70,E70,ET70 Speaker/Strobe (Wheelock ECHSG70W-FR)	22.38	5.64
28 46 13 31-2766	EA	White, Square, Fire Lettered, Grill Plate For CH70,E70,ET70 Speaker/Strobe (Wheelock ECHSG70W-FW)	22.38	5.64
28 46 13 31-2767	EA	Red, Round, Fire Lettered, Grill Plate For CH70, E70, ET70 Speaker Strobe (Wheelock ECHSG90-R)	21.29	5.64
28 46 13 31-2768	EA	White, Round, Fire Lettered, Grill Plate For CH70, E70, ET70 Speaker Strobe (Wheelock ECHSG90-W)	21.29	5.64
28 46 13 31-2769	EA	Red, Surface Mounted, Extender Ring (Wheelock SER-R)	29.99	5.64
28 46 13 31-2770	EA	White, Surface Mounted, Extender Ring (Wheelock SER-W)	30.33	5.64
28 46 13 31-2771	EA	Red, Semi-Flush, Plate (Wheelock SFP-R)	23.81	5.64
28 46 13 31-2772	EA	Silver, Semi-Flush, Plate (Wheelock SFP-S)	22.49	5.64
28 46 13 31-2773	EA	White, Semi-Flush, Plate (Wheelock SFP-W)	23.81	5.64
28 46 13 31-2774	EA	Red, Weather Resistant Back Box For ASWP (Wheelock WPBB-R)	59.32	14.10
28 46 13 31-2775	EA	Red, Weather Resistant Back Box For RSSWP (Wheelock WPSBB-R)	54.29	14.10
28 46 13 31-2776	EA	White, Weather Resistant Back Box For RSSWP Series (Wheelock WPSBB-W)	54.29	14.10
28 46 13 31-2777		**Manual Pull Station** *(28 46 13 31-2585)*		
28 46 13 31-2778	EA	SPST, Single Action, Manual Pull Station (Eaton Wheelock MPS-100)	135.71	28.20
28 46 13 31-2779	EA	SPST, Double Action, Manual Pull Station (Eaton Wheelock MPS-200)	135.71	28.20
28 46 13 31-2780	EA	Explosion Proof, Single Action Manual Pull Station (Eaton Wheelock MPS-400X)	1,254.04	28.20
28 46 13 31-2781		**Potter Fire Alarm** *(28 46 13 31)*		
28 46 13 31-2782		**Electric Alarm Bells** *(28 46 13 31-2781)*		
28 46 13 31-2783	EA	6" Alarm Bell, 12 Volt DC (Potter MBA-6-12)	125.70	42.30
28 46 13 31-2784	EA	8" Alarm Bell, 12 Volt DC (Potter MBA-8-12)	138.68	42.30
28 46 13 31-2785	EA	10" Alarm Bell, 12 Volt DC (Potter MBA-10-12)	145.17	42.30
28 46 13 31-2786	EA	6" Alarm Bell, 24 Volt DC (Potter MBA-6-24)	125.70	42.30
28 46 13 31-2787	EA	8" Alarm Bell, 24 Volt DC (Potter MBA-8-24)	138.68	42.30
28 46 13 31-2788	EA	10" Alarm Bell, 24 Volt DC (Potter MBA-10-24)	145.17	42.30
28 46 13 31-2789	EA	6" Alarm Bell, 24 Volt AC (Potter PBA246)	136.72	42.30
28 46 13 31-2790	EA	8" Alarm Bell, 24 Volt AC (Potter PBA248)	142.94	42.30
28 46 13 31-2791	EA	10" Alarm Bell, 24 Volt AC (Potter PBA2410)	179.64	42.30
28 46 13 31-2792	EA	6" Alarm Bell, 120 Volt AC (Potter PBA1206)	127.57	42.30
28 46 13 31-2793	EA	8" Alarm Bell, 120 Volt AC (Potter PBA1208)	142.94	42.30
28 46 13 31-2794	EA	10" Alarm Bell, 120 Volt AC (Potter PBA12010)	155.80	42.30
28 46 13 31-2795		**Manual Pull Station** *(28 46 13 31-2781)*		
28 46 13 31-2796	EA	SPST, Single Action, Manual Pull Station (Potter P32-1T)	93.19	28.20
28 46 13 31-2797	EA	DPST, Single Action, Manual Pull Station (Potter RMS-2T)	99.09	28.20
28 46 13 31-2798	EA	DPST, Single Action, Manual Pull Station (Potter RMS-6T)	165.42	28.20
28 46 13 31-2799	EA	DPST, Single Action, Key Reset Manual Pull Station (Potter RMS-1T-KL)	102.75	28.20
28 46 13 31-2800	EA	SPST, Dual Action, Manual Pull Station (Potter P32-1T-LP)	96.53	28.20
28 46 13 31-2801	EA	SPST, Weather Proof, Manual Pull Station (Potter RMS-1T-WP)	186.17	28.20
28 46 13 31-2802	EA	SPST, Weather Proof Dual Action, Manual Pull Station (Potter RMS-1T-WP-LP)	235.65	28.20
28 46 13 31-2803		**Fire Alarm Terminal Cabinets** *(28 46 13 31)*		
28 46 13 31-2804	EA	18 Point Lockable Fire Alarm Terminal Cabinet	251.51	56.50
28 46 13 31-2805	EA	32 Point Lockable Fire Alarm Terminal Cabinet	334.65	56.50
28 46 13 31-2806	EA	64 Point Lockable Fire Alarm Terminal Cabinet	500.89	56.50
28 46 13 31-2807	EA	128 Point Lockable Fire Alarm Terminal Cabinet	667.09	56.50

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 46 13 31-2808		Test And Certification Of Fire Alarm System To Tie In To Existing Systems *(28 46 13 31)*		
28 46 13 31-2809	HR	Test And Certification Of Fire Alarm System	280.08	
28 46 13 31-2810		Programming Of Existing Fire Alarm System *(28 46 13 31)*		
28 46 13 31-2811	HR	Fire Alarm Techanician For Programming Of Existing Fire Alarm System	224.06	
28 46 13 31-2812		Removal And Reinstallation Of Smoke Detector *(28 46 13 31)*		
		Note: Includes storage, cleaning and supply materials.		
28 46 13 31-2813	EA	Removal And Reinstallation Of Ceiling Mounted Smoke Detector	157.93	
28 46 13 31-2814	EA	Removal And Reinstallation Of Wall Mounted Smoke Detector	126.90	
28 46 13 31-2815		Kidde Fire Safety Equipment *(28 46 13 31)*		
28 46 13 31-2816		Smoke Detectors *(28 46 13 31-2815)*		
28 46 13 31-2817	EA	Combination Smoke And Carbon Monoxide Detector, Intelligent Sensor, 120 Volt Hardwired, With10 Year Sealed Battery Back-up (Kidde P4010ACS-CO)	157.19	42.30
28 46 13 31-2818	EA	Combination Smoke And Carbon Monoxide Detector, 120 Volt Wired, With 10 Year Sealed Battery Back-up (Kidde i12010SCO)	136.71	42.30
28 46 13 31-2819	EA	Combination Smoke And Carbon Monoxide Detector, With 10 Year Sealed Battery (Kidde P3010K-CO)	130.51	42.30
28 46 31		**Fire-Alarm Initiating Devices** *(28 46)*		
28 46 31 11		**Heat-Sensing Fire Detectors** *(28 46 31)*		
28 46 31 11-0001		Protectowire Fire Alarm *(28 46 31 11)*		
28 46 31 11-0002		Linear Heat Detector Cable *(28 46 31 11-0001)*		
28 46 31 11-0003	LF	Multi-Purpose Linear Heat Detector, EPC Type, 155 To 220 Degree F (Protectowire PHSC-EPC)	5.90	
28 46 31 11-0004	LF	Multi-Purpose Linear Heat Detector With Messenger Wire, EPC Type, 155 To 220 Degree F (Protectowire PHSC-EPC-M	6.42	
28 46 31 11-0005	LF	High Performance Linear Heat Detector, XCR Type, 155 To 220 Degree F (Protectowire PHSC-XCR)	6.42	
28 46 31 11-0006	LF	High Performance Linear Heat Detector With Messenger Wire, XCR Type, 155 To 220 Degree F (Protectowire PHSC-XCR-M	6.93	
28 46 31 11-0007	LF	Multi-Purpose Linear Heat Detector, XLT Type, 135 Degree F (Protectowire PHSC-XLT)	7.34	
28 46 31 11-0008	LF	Multi-Purpose Linear Heat Detector With Messenger Wire, XLT Type, 135 Degree F (Protectowire PHSC-XLT-M)	7.86	
28 46 31 11-0009	EA	Flexible Lead Connector For Linear Heat Detector (Protectowire PFL)	70.24	
28 46 31 11-0010	EA	Splicing Connector For Linear Heat Detector (Protectowire PWSC)	28.96	
28 46 31 11-0011	EA	Cable Tray Clip For Linear Heat Detector (Protectowire CC-2N And CC-2W)	9.23	
28 46 31 11-0012	EA	Cable Tray Spring Clip For Linear Heat Detector (Protectowire HPC-2)	9.23	
28 46 31 11-0013	EA	Adhesive Cable Mount For Linear Heat Detector (Protectowire EMS-A-CO)	10.06	
28 46 31 11-0014	EA	Beam Clamp For Linear Heat Detector (Protectowire BC-2)	15.72	
28 46 31 11-0015	EA	Beam Clamp With Polypropylene Clip For Linear Heat Detector (Protectowire BC-3P)	16.41	
28 46 31 11-0016	EA	Pipe Mounting Straps Nylon (3/4" to 2" Pipe) (Protectowire PM-3A)	1.73	
28 46 31 11-0017	EA	Pipe Mounting Straps Nylon (2-1/2" to 3-1/2" Pipe) (Protectowire PM-3B)	2.35	
28 46 31 11-0018	EA	Pipe Mounting Straps Nylon (4" to 6" Pipe) (Protectowire PM-3C)	10.40	
28 46 41		**Fire-Alarm Notification Appliances** *(28 46)*		
28 46 41 11		**Audible Fire-Alarm Notification Appliances** *(28 46 41)*		
		See CSI section 28 46 13 31-0000 for fire alarm speakers.		
28 46 41 31		**Combination Fire-Alarm Notification Appliances** *(28 46 41)*		
		See CSI section 28 46 13 31-0000 for fire alarm horns and strobes.		
28 47		**Mass Notification** *(28 40)*		
28 47 15		**Mass Notification Control Panels** *(28 47)*		
28 47 15 00-0001		Central Station Controls *(28 47 15)*		
28 47 15 00-0002	EA	Desktop 18 Function Base Station Control/Encoder (Whelen E747)	1,005.98	
28 47 15 00-0003	EA	Desktop 35 Function Base Station Control/Encoder (Whelen E969)	1,637.90	
28 47 15 00-0004	EA	Desktop Central Station Control Encoder/Decoder (Whelen E2010)	4,897.22	56.40
28 47 15 00-0005	EA	Siren Status Printer And Cable Option For E2010 (Whelen E2010P)	1,491.72	28.20
28 47 15 00-0006	EA	Rack Mounted Central Station Control Encoder/Decoder (Whelen E2010R)	5,693.50	112.80
28 47 15 00-0007	EA	Internal Option To Convert E2010 To FSK Format (Whelen E2010FSK)	825.32	28.20
28 47 15 00-0008	EA	Option To Convert Activation Controls To FSK Format (Whelen FSKCEO)	886.04	28.20
28 47 17		**Notification Devices and Methods** *(28 47)*		
28 47 17 17		**Notification Appliances and Methods Public Methods** *(28 47 17)*		
28 47 17 17-0001		Voice Capable Omni-Directional Speakers *(28 47 17 17)*		
28 47 17 17-0002	EA	1 Cell, 109 dB, Voice Capable Omni-Directional Speaker (Whelen WPS2901A)	13,779.84	747.35
		Note: Includes amplifiers, controller box with power supply and battery charger. Excludes batteries.		
28 47 17 17-0003	EA	2 Cells, 115 dB, Voice Capable Omni-Directional Speaker (Whelen WPS2902A)	16,894.97	779.84
		Note: Includes amplifiers, controller box with power supply and battery charger. Excludes batteries.		

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 47 17 17-0004	EA	3 Cells, 119 dB, Voice Capable Omni-Directional Speaker (Whelen WPS2903A) Note: Includes amplifiers, controller box with power supply and battery charger. Excludes batteries.	19,971.31	812.34
28 47 17 17-0005	EA	4 Cells, 121 dB, Voice Capable Omni-Directional Speaker (Whelen WPS2904A) Note: Includes amplifiers, controller box with power supply and battery charger. Excludes batteries.	23,047.66	844.83
28 47 17 17-0006	EA	5 Cells, 123 dB, Voice Capable Omni-Directional Speaker (Whelen WPS2905A) Note: Includes amplifiers, controller box with power supply and battery charger. Excludes batteries.	26,201.55	877.33
28 47 17 17-0007	EA	6 Cells, 125 dB, Voice Capable Omni-Directional Speaker (Whelen WPS2906A) Note: Includes amplifiers, controller box with power supply and battery charger. Excludes batteries.	31,487.68	909.82
28 47 17 17-0008	EA	7 Cells, 126 dB, Voice Capable Omni-Directional Speaker (Whelen WPS2907A) Note: Includes amplifiers, controller box with power supply and battery charger. Excludes batteries.	34,602.80	942.31
28 47 17 17-0009	EA	8 Cells, 127 dB, Voice Capable Omni-Directional Speaker (Whelen WPS2908A) Note: Includes amplifiers, controller box with power supply and battery charger. Excludes batteries.	38,351.13	974.80
28 47 17 17-0010	EA	9 Cells, 128 dB, Voice Capable Omni-Directional Speaker (Whelen WPS2909A) Note: Includes amplifiers, controller box with power supply and battery charger. Excludes batteries.	41,427.47	1,007.29
28 47 17 17-0011	EA	10 Cells, 129 dB, Voice Capable Omni-Directional Speaker (Whelen WPS2910A) Note: Includes amplifiers, controller box with power supply and battery charger. Excludes batteries.	44,542.60	1,039.79
28 47 17 17-0012	EA	3 Cells, 127 dB, Voice Capable Rotating Directional Speaker (Whelen WPS4003) Note: Includes amplifiers, controller box with power supply and battery charger. Excludes batteries.	30,324.64	909.82
28 47 17 17-0013	EA	4 Cells, 129 dB, Voice Capable Rotating Directional Speaker (Whelen WPS4004) Note: Includes amplifiers, controller box with power supply and battery charger. Excludes batteries.	32,315.48	942.31
28 47 17 17-0014	EA	One-Way Control, 10 Digit DTMF Landline (Whelen D2030LL)	535.80	28.20
28 47 17 17-0015	EA	VHF High-Band Narrow-Band, One-Way Control, 10 Digit DTMF (Whelen D2030NV)	2,279.10	28.20
28 47 17 17-0016	EA	UHF Narrow-Band, One-Way Control, 10 Digit DTMF (Whelen D2030NU)	2,279.10	28.20
28 47 17 17-0017	EA	UHF Wide Band, One-Way Control, 10 Digit DTMF (Whelen D2030WU)	2,059.42	28.20
28 47 17 17-0018	EA	VHF High-Band Wide Band, One-Way Control, 10 Digit DTMF (Whelen D2030WV)	1,994.80	28.20
28 47 17 17-0019	EA	Two-Tone Sequential Option (Whelen WPSTT)	494.61	28.20
28 47 17 17-0020	EA	Full Function Auxiliary/Status Board For Contact Closure Activation (Two Way) (Whelen AUXCS)	635.34	28.20
28 47 17 17-0021	EA	Landline, 10 Digit DTMF (Whelen C2030LL)	660.51	28.20
28 47 17 17-0022	EA	VHF High-Band Narrow-Band, Two-Way Control, 10 Digit DTMF (Whelen C2030NV)	3,250.15	28.20
28 47 17 17-0023	EA	UHF Narrow-Band, Two-Way Control, 10 Digit DTMF (Whelen C2030NU)	2,498.79	28.20
28 47 17 17-0024	EA	UHF Wide-Band, 10 Digit DTMF (Whelen C2030WU)	2,498.79	28.20
28 47 17 17-0025	EA	VHF High-Wide Band, 10 Digit DTMF (Whelen C2030WV)	2,498.79	28.20
28 47 17 17-0026	EA	Option To Convert WPS Activation Controls To FSK Format (Whelen FSKXMOD)	886.04	28.20
28 47 17 17-0027	EA	Cabinet Window LED Status Indicator (Whelen STATUS)	611.73	28.20
28 47 17 17-0028	EA	Paging Interface Whelen Tones With Existing In-Plant Systems (Whelen PGINT)	405.37	28.20
28 47 17 17-0029	EA	Intrusion Alarm (Whelen INTRUWPS)	305.82	28.20
28 47 17 17-0030	EA	Custom Pre-Recorded Messages (One Time Set-up Charge Per Message) (Whelen MSGPROG)	218.53	
28 47 17 17-0031	EA	Whelen Library Messages (Whelen MSGPROGL)	43.76	
28 47 17 17-0032	EA	Noise Cancelling Microphone Includes Local Microphone Input Harness (Whelen WPSNCMIC)	162.23	28.20
28 47 17 17-0033	EA	One Pair Of Whelen Approved Batteries (Whelen WPSBATT)	1,159.77	42.30
28 47 17 17-0034	EA	WPS And OA Series, Rooftop Mounted (Whelen RTM)	10,729.34	714.85
28 47 17 17-0035	EA	Two 80 Watt Panels, Solar Power System (Whelen SBC280) Note: Includes mounting bracket and regulator.	4,564.12	169.20
28 47 17 17-0036	EA	Amber, 6 LED Lights For The Base Of WPS Series (Whelen VALERTA)	2,333.15	42.30
28 47 17 17-0037	EA	Blue, 6 LED Lights For The Base Of WPS Series (Whelen VALERTB)	2,333.15	42.30
28 47 17 17-0038	EA	Clear, 6 LED Lights For The Base Of WPS Series (Whelen VALERTC)	2,333.15	42.30
28 47 17 17-0039	EA	Green, 6 LED Lights For The Base Of WPS Series (Whelen VALERTG)	2,333.15	42.30
28 47 17 17-0040	EA	Red, 6 LED Lights For The Base Of WPS Series Products (Whelen VALERTR)	2,333.15	42.30
28 47 17 17-0041	EA	Amber, 24 Volt DC, LED, Beacon (Whelen L31HAF4)	803.13	42.30
28 47 17 17-0042	EA	Blue, 24 Volt DC, LED, Beacon (Whelen L31HBF4)	803.13	42.30
28 47 17 17-0043	EA	Red, 24 Volt DC, LED, Beacon (Whelen L31HRF4)	803.13	42.30
28 47 17 17-0044	EA	Amber, 24 Volt DC, Strobe (Whelen ISB24A)	625.78	42.30
28 47 17 17-0045	EA	Blue, 24 Volt DC, Strobe (Whelen ISB24B)	625.78	42.30
28 47 17 17-0046	EA	Clear, 24 Volt DC, Strobe (Whelen ISB24C)	625.78	42.30
28 47 17 17-0047	EA	Green, 24 Volt DC, Strobe (Whelen ISB24G)	625.78	42.30
28 47 17 17-0048	EA	Red, 24 Volt DC, Strobe (Whelen ISB24R)	625.78	42.30
28 47 17 17-0049	EA	Strobe/LED Controller With Mounting Plate, Hardware And Harnessing For ISB24 (Whelen SCWPS)	900.25	28.20
28 47 17 17-0050	EA	Strobe Controller (Whelen STCTRL)	666.23	28.20
28 47 17 17-0051	EA	LED Controller (Whelen LEDCTRL)	666.23	28.20
28 47 17 17-0052	EA	Speaker Driver Handle/Plate Assembly Only (Less Speaker Driver) (Whelen EZ-PULL)	426.34	42.30
28 47 17 17-0053	EA	Siren Diagnostic and Programming Software In CD Format (Whelen SDPTS)	536.81	
28 47 17 17-0054	EA	400 Watt Speaker Driver (Whelen SPKDRV)	927.10	28.20
28 47 17 17-0055	EA	Cabinet Window LED Status Indicator (Whelen STATUS)	461.43	28.20
28 47 17 17-0056	EA	Noise Cancelling Microphone Option For Encoder (Whelen WPSMIC)	162.23	28.20
28 47 17 17-0057	EA	Notifier/Whelen Interface Board (Whelen NAUXCS)	916.80	28.20
28 47 17 17-0058		**Tone Only, Omni-Alert Sirens** *(28 47 17 17)*		
28 47 17 17-0059	EA	One Cell, Tone Only, Omni-Alert Siren (Whelen OA1) Note: Includes amplifiers, controller box with power supply and battery charger. Excludes batteries.	11,078.26	714.85
28 47 17 17-0060	EA	Two Cell, Tone Only, Omni-Alert Siren (Whelen OA2) Note: Includes amplifiers, controller box with power supply and battery charger. Excludes batteries.	13,909.07	747.35
28 47 17 17-0061	EA	Three Cell, Tone Only, Omni-Alert Siren (Whelen OA3) Note: Includes amplifiers, controller box with power supply and battery charger. Excludes batteries.	16,714.05	779.84
28 47 17 17-0062	EA	Four Cell, Tone Only, Omni-Alert Siren (Whelen OA4) Note: Includes amplifiers, controller box with power supply and battery charger. Excludes batteries.	19,583.63	812.34
28 47 17 17-0063	EA	One Way Controls, Auxiliary Board For Contact Closure Activation (Whelen OAUXIN)	317.44	28.20
28 47 17 17-0064	EA	One Way Landline Activation, 10 Digit DTMF (Whelen OD2030LL)	535.80	28.20
28 47 17 17-0065	EA	VHF High-Narrow Band, 10 Digit DTMF (Whelen OD230NV)	2,279.10	28.20
28 47 17 17-0066	EA	UHF Narrow-Band, 10 Digit DTMF (Whelen OD230NU)	2,279.10	28.20
28 47 17 17-0067	EA	UHF Wide-Band, 10 Digit DTMF (Whelen OD230WU)	2,059.42	28.20
28 47 17 17-0068	EA	VHF High-Wide Band, 10 Digit DTMF (Whelen OD230WV)	1,994.80	28.20

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 47 17 17-0069	EA	One-Way Control Two-Tone Sequential Option (Whelen OTT)	430.54	28.20
28 47 17 17-0070	EA	Two Way Controls, Contact Closure Activation Board (Whelen OAUXCS)	710.29	28.20
28 47 17 17-0071	EA	Two Way Landline Activation (Whelen OC2030LL)	738.72	28.20
28 47 17 17-0072	EA	VHF High-Narrow Band, 10 Digit DTMF (Whelen OC230NV)	2,498.79	28.20
28 47 17 17-0073	EA	UHF Narrow-Band, 10 Digit DTMF (Whelen OC230NU)	2,498.79	28.20
28 47 17 17-0074	EA	UHF, 10 Digit DTMF (Whelen OC230WU)	2,498.79	28.20
28 47 17 17-0075	EA	VHF High Band, 10 Digit DTMF (Whelen OC230WV)	2,498.79	28.20
28 47 17 17-0076	EA	Converts The Omni-Alert Siren Activation Controls To FSK Format (Whelen OFSKXMOD)	886.04	28.20
28 47 17 17-0077	EA	Paging Interface To Interface Whelen Tones With Existing In-Plant Systems (Whelen OPGINT)	405.37	28.20
28 47 17 17-0078	EA	Cabinet Window LED Status Indicator (Whelen OSTATUS)	461.43	28.20
28 47 17 17-0079	EA	Intrusion Alarm (Whelen OINTRU)	244.04	28.20
28 47 17 17-0080	EA	80 Watt Solar Power Option (Whelen OSBC280)	4,564.12	169.20
28 47 17 17-0081	EA	One Pair Of Whelen Approved Batteries For Omnialert (Whelen BSETO)	940.42	42.30

28 47 17 17-0082 Tone-Only Rotating Directional Speakers *(28 47 17 17)*

28 47 17 17-0083	EA	3 Cells, 127 dB, Tone-Only Rotating Directional Speaker (Whelen VORTEXR3) Note: Includes amplifiers, controller box with power supply and battery charger. Excludes batteries.	23,306.11	844.83
28 47 17 17-0084	EA	4 Cells, 129 dB, Tone-Only Rotating Directional Speaker (Whelen VORTEXR4) Note: Includes amplifiers, controller box with power supply and battery charger. Excludes batteries.	24,728.36	877.33
28 47 17 17-0085	EA	Limited Function Auxiliary Board For Contact Closure Activation (Whelen VAUXIN)	287.52	28.20
28 47 17 17-0086	EA	Landline, 10 Digit DTMF (Whelen VD2030LL)	597.86	28.20
28 47 17 17-0087	EA	VHF High-Narrow Band, 10 Digit DTMF (Whelen VD230NV)	2,279.10	28.20
28 47 17 17-0088	EA	UHF Narrow-Band, 10 Digit DTMF (Whelen VD230NU)	2,279.10	28.20
28 47 17 17-0089	EA	UHF Wide-Band, 10 Digit DTMF (Whelen VD230WU)	2,059.42	28.20
28 47 17 17-0090	EA	VHF High-Wide Band, 10 Digit DTMF (Whelen VD230WV)	1,994.80	28.20
28 47 17 17-0091	EA	Two-Tone Sequential Option (Order One-Way Control Option, Above, VD2020LI, VD2020H, VD2020U) (Whelen VORTT)	430.54	28.20
28 47 17 17-0092	EA	Full Function Auxiliary/Status Control Board For Contact Closure Activation (Whelen VAUXCS)	696.07	28.20
28 47 17 17-0093	EA	Landline, 10 Digit DTMF (Whelen VC2030LL)	738.72	28.20
28 47 17 17-0094	EA	VHF High-Narrow Band, 10 Digit DTMF (Whelen VC230NV)	2,498.79	28.20
28 47 17 17-0095	EA	UHF Narrow-Band, 10 Digit DTMF (Whelen VC230NU)	2,498.79	28.20
28 47 17 17-0096	EA	UHF, 10 Digit DTMF (Whelen VC230WU)	2,498.79	28.20
28 47 17 17-0097	EA	VHF High Band, 10 Digit DTMF (Whelen VC230WV)	2,498.79	28.20
28 47 17 17-0098	EA	Option To Convert The Vortex Activation Controls To FSK Format (Whelen VFSKXMOD)	886.04	28.20
28 47 17 17-0099	EA	Cabinet Window LED Status Indicator (Whelen VSTATUS)	513.86	28.20
28 47 17 17-0100	EA	Paging Interface To Interface Whelen Tones With Existing In-Plant Systems (Whelen VPGINT)	405.37	28.20
28 47 17 17-0101	EA	Vortex Intrusion Alarm (Whelen VINTRU)	244.04	28.20
28 47 17 17-0102	EA	Speaker Pole Top Bracket (Whelen VPTB)	710.29	28.20
28 47 17 17-0103	EA	80 Watt Solar Power Option (Whelen VSBC280)	4,564.12	169.20
28 47 17 17-0104	EA	One Pair Of Whelen Approved Batteries For Vortex Series (Whelen BSETVOR)	940.42	42.30
28 47 17 17-0105	EA	Program Charge For Custom VROM Message (Whelen VPROG)	3,808.74	

28 47 17 17-0106 Uni-Directional Rotating Speakers *(28 47 17 17)*

28 47 17 17-0107	EA	118 dB, Uni-Directional Rotating Speaker (Whelen HORNET)	14,761.97	747.35
28 47 17 17-0108	EA	One Way Contact Closure Activation Control Board (Whelen HAUXIN)	287.52	28.20
28 47 17 17-0109	EA	Landline, One Way Control, 10 Digit DTMF (Whelen HD2030LL)	597.86	28.20
28 47 17 17-0110	EA	VHF High-Narrow Band, One Way Control, 10 Digit DTMF (Whelen HD230NV)	2,279.10	28.20
28 47 17 17-0111	EA	UHF Narrow-Band, One Way Control, 10 Digit DTMF (Whelen HD230NU)	2,279.10	28.20
28 47 17 17-0112	EA	UHF Wide-Band, One Way Control, 10 Digit DTMF (Whelen HD230WU)	2,059.42	28.20
28 47 17 17-0113	EA	VHF High-Wide Band, One Way Control, 10 Digit DTMF (Whelen HD230WV)	1,994.80	28.20
28 47 17 17-0114	EA	Two-Tone Sequential Option For Hornet (Whelen HORTT)	478.97	28.20
28 47 17 17-0115	EA	Two Way Contact Closure Activation And Status Control Board (Whelen HAUXCS)	622.75	28.20
28 47 17 17-0116	EA	Landline, Two Way Control, 10 Digit DTMF (Whelen HC2030LL)	660.51	28.20
28 47 17 17-0117	EA	VHF High-Narrow Band, Two Way Control, 10 Digit DTMF (Whelen HC230NV)	2,498.79	28.20
28 47 17 17-0118	EA	UHF Narrow-Band, Two Way Control, 10 Digit DTMF (Whelen HC230NU)	2,498.79	28.20
28 47 17 17-0119	EA	UHF, Two Way Control, 10 Digit DTMF (Whelen HC230WU)	2,498.79	28.20
28 47 17 17-0120	EA	VHF High Band, Two Way Control, 10 Digit DTMF (Whelen HC230WV)	2,498.79	28.20
28 47 17 17-0121	EA	Converts Siren Activation Controls To FSK Format (Whelen HFSKXMOD)	886.04	28.20
28 47 17 17-0122	EA	LED Status Indicator (Whelen HSTATUS)	461.43	28.20
28 47 17 17-0123	EA	Option For Paging Interface (Whelen HPGINT)	405.37	28.20
28 47 17 17-0124	EA	Intrusion Alarm (Whelen HINTRU)	244.04	28.20
28 47 17 17-0125	EA	Solar Power Option (Whelen HSBC280)	4,564.12	169.20
28 47 17 17-0126	EA	Pole Top Bracket For Speaker (Whelen HPTB)	657.08	28.20
28 47 17 17-0127	EA	One Pair Of Whelen Approved Batteries (Whelen BSETF)	940.42	42.30

28 47 17 17-0128 All Hazard In-Plant Personnel Warning System *(28 47 17 17)*

28 47 17 17-0129	EA	400 Watt, Voice Capable, In-Plant Personnel Warning System (Whelen IPS400)	7,284.03	902.41
28 47 17 17-0130	EA	800 Watt, Voice Capable, In-Plant Personnel Warning System (Whelen IPS800)	8,866.52	1,015.20
28 47 17 17-0131	EA	15 Watt, Wide Angle Speaker (Whelen WS15T)	408.39	42.30
28 47 17 17-0132	EA	Recess Mounted, 15 Watt Speaker (Whelen WS15TR)	390.09	42.30
28 47 17 17-0133	EA	With Grill, Recess Mounted, 15 Watt Speaker (Whelen WS15TEN)	756.22	42.30
28 47 17 17-0134	EA	30 Watt, Wide Angle Speaker (Whelen WS30T)	512.51	42.30
28 47 17 17-0135	EA	60 Watt, Wide Angle Speaker (Whelen WS60T)	1,047.97	42.30
28 47 17 17-0136	EA	Explosion-Proof, 60 Watt, Wide Angle Speaker (Whelen WSXPL6T)	1,814.60	47.94
28 47 17 17-0137	EA	100 Watt, Wide Angle Speaker (Whelen WS100)	663.54	42.30
28 47 17 17-0138	EA	Weatherproof Housing, 100 Watt, Wide Angle Speaker (Whelen WS100TCH)	1,040.95	47.94
28 47 17 17-0139	EA	Intrusion Alarm For Whelen Outdoor Speaker Cabinets (Whelen INTRU)	244.04	28.20

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 47 17 17-0140		Firehouse Siren *(28 47 17 17)*		
28 47 17 17-0141	EA	Auxiliary Board Contact Closure (Whelen FAUXIN)	287.52	28.20
28 47 17 17-0142	EA	Two-Tone Sequential Option (Whelen FTT)	430.54	28.20
28 47 17 17-0143	EA	Auxiliary/Status Control Board (Whelen FAUXCS)	696.07	28.20
28 47 17 17-0144	EA	Landline, 10 Digit DTMF (Whelen FC2030LL)	660.51	28.20
28 47 17 17-0145	EA	VHF High-Narrow Band, 10 Digit DTMF (Whelen FC230NV)	2,498.79	28.20
28 47 17 17-0146	EA	UHF Narrow-Band, 10 Digit DTMF (Whelen FC230NU)	2,498.79	28.20
28 47 17 17-0147	EA	UHF, 10 Digit DTMF (Whelen FC230WU)	2,498.79	28.20
28 47 17 17-0148	EA	VHF High Band, 10 Digit DTMF (Whelen FC230WV)	2,498.79	28.20
28 47 17 17-0149	EA	Paging Interface Control Option (Whelen FPGINT)	405.37	28.20
28 47 17 17-0150	EA	Intrusion Alarm Control Option (Whelen FINTRU)	244.04	28.20
28 47 17 17-0151	EA	Solar Power Option (Whelen FSBC280) Note: Two 80 watt panels, with brackets and solar regulator.	4,564.12	169.20
28 47 17 17-0152		Alert Monitor And Message Display *(28 47 17 17)*		
28 47 17 17-0153	EA	Alert Monitor With Radio Receiver VHF High Band (Whelen V2000H)	2,085.26	28.20
28 47 17 17-0154	EA	Alert Monitor VHF High-Narrow Band (Whelen V2000NH)	2,085.26	28.20
28 47 17 17-0155	EA	Alert Monitor UHF Narrow-Band (Whelen V2000NU)	2,085.26	28.20
28 47 17 17-0156	EA	Alert Monitor With Radio Receiver UHF (Whelen V2000U)	2,085.26	28.20
28 47 17 17-0157	EA	Internal Battery And Charger For VA2000 Series (Whelen VA2BATT)	252.79	42.30
28 47 17 17-0158	EA	Mounting Bracket For Under Cabinet Or Vehicle Mounting - VA2000 Series (Whelen VA2MTG)	68.99	28.20
28 47 17 17-0159	EA	Factory Programming Of 1 To 15 VA2000 Display Messages (Whelen VA2PROGA)	162.47	
28 47 17 17-0160	EA	Factory Programming Of 16 To 45 VA2000 Display Messages (Whelen VA2PROGB)	255.15	
28 47 17 17-0161		Portable Test Set *(28 47 17 17)*		
28 47 17 17-0162	EA	VHF High Band, Portable Test Set (Whelen PT2010H)	8,438.52	
28 47 17 17-0163	EA	VHF Low Band, Portable Test Set (Whelen PT2010L)	8,438.52	
28 47 17 17-0164	EA	UHF, Portable Test Set (Whelen PT2010U)	8,438.52	
28 47 17 17-0165		Replacement Warning Lights *(28 47 17 17)*		
28 47 17 17-0166	EA	Amber, Incandescent, 24 Volt DC, Industrial Rotating Warning Light (Whelen IR3024IA)	401.45	45.12
28 47 17 17-0167	EA	Blue, Incandescent, 24 Volt DC, Industrial Rotating Warning Light (Whelen IR3024IB)	401.45	45.12
28 47 17 17-0168	EA	Clear, Incandescent, 24 Volt DC, Industrial Rotating Warning Light (Whelen IR3024IC)	401.45	45.12
28 47 17 17-0169	EA	Green, Incandescent, 24 Volt DC, Industrial Rotating Warning Light (Whelen IR3024IG)	401.45	45.12
28 47 17 17-0170	EA	Red, Incandescent, 24 Volt DC, Industrial Rotating Warning Light (Whelen IR3024IR)	401.45	45.12
28 47 17 17-0171	EA	Amber, Incandescent, 120 Volt AC, Industrial Rotating Warning Light (Whelen IR3120IA)	432.34	45.12
28 47 17 17-0172	EA	Blue, Incandescent, 120 Volt AC, Industrial Rotating Warning Light (Whelen IR3120IB)	277.88	45.12
28 47 17 17-0173	EA	Clear, Incandescent, 120 Volt AC, Industrial Rotating Warning Light (Whelen IR3120IC)	427.76	45.12
28 47 17 17-0174	EA	Green, Incandescent, 120 Volt AC, Industrial Rotating Warning Light (Whelen IR3120IG)	427.76	45.12
28 47 17 17-0175	EA	Red, Incandescent, 120 Volt AC, Industrial Rotating Warning Light (Whelen IR3120IR)	427.76	45.12
28 47 17 17-0176	EA	Amber, Halogen, 24 Volt DC, Industrial Rotating Warning Light (Whelen IR3024HA)	401.45	45.12
28 47 17 17-0177	EA	Blue, Halogen, 24 Volt DC, Industrial Rotating Warning Light (Whelen IR3024HB)	401.45	45.12
28 47 17 17-0178	EA	Clear, Halogen, 24 Volt DC, Industrial Rotating Warning Light (Whelen IR3024HC)	401.45	45.12
28 47 17 17-0179	EA	Green, Halogen, 24 Volt DC, Industrial Rotating Warning Light (Whelen IR3024HG)	401.45	45.12
28 47 17 17-0180	EA	Red, Halogen, 24 Volt DC, Industrial Rotating Warning Light (Whelen IR3024HR)	401.45	45.12
28 47 17 17-0181	EA	Amber, Halogen, 120 Volt AC, Industrial Rotating Warning Light (Whelen IR3120HA)	450.65	45.12
28 47 17 17-0182	EA	Blue, Halogen, 120 Volt AC, Industrial Rotating Warning Light (Whelen IR3120HB)	450.65	45.12
28 47 17 17-0183	EA	Clear, Halogen, 120 Volt AC, Industrial Rotating Warning Light (Whelen IR3120HC)	289.32	45.12
28 47 17 17-0184	EA	Green, Halogen, 120 Volt AC, Industrial Rotating Warning Light (Whelen IR3120HG)	289.32	45.12
28 47 17 17-0185	EA	Red, Halogen, 120 Volt AC, Industrial Rotating Warning Light (Whelen IR3120HR)	289.32	45.12
28 47 17 17-0186		Antenna *(28 47 17 17)*		
28 47 17 17-0187	EA	50' Antenna Cable (Honeywell Ademco 7626-50HC)	318.13	
28 47 17 17-0188	EA	External/Remote Weatherproof Antenna (Honeywell Ademco GSM-ANT3DB)	273.64	
28 47 17 17-0189	EA	80GHz Millimeter Wave Radio (BridgeWave Flex4G-1000)	15,914.60	
28 47 21		**Mass Notification System Interfaces** *(28 47)*		
28 47 21 21		**Notification Interfaces to Fire Detection and Alarm** *(28 47 21)*		
28 47 21 21-0001		Emergency Command Center (Honeywell Fire-Lite) *(28 47 21 21)*		
28 47 21 21-0002	EA	Emergency Command Center Multipurpose Emergency Voice Eevacuation Panels (Fire-Lite ECC-50/100 E)	2,447.30	282.00
28 47 21 21-0003	EA	Circuit Expander Module (Fire-Lite ECC_CE6)	477.47	22.56
28 47 21 21-0004	EA	25V, 50 Watt Audio Amplifier Module (Fire-Lite ECC_50W_25V)	419.03	28.20
28 47 21 21-0005	EA	75V, 50 Watt Audio Amplifier Module (Fire-Lite ECC_50W_70V)	432.12	28.20
28 47 21 21-0006	EA	70V Transformer Conversion Module (Fire-Lite ECC_XRM_70V)	221.40	28.20
28 47 21 21-0007	EA	Local Operator Console (Fire-Lite ECC-LOC)	1,318.63	56.40
28 47 21 21-0008	EA	Remote Page Unit Hand Held Micorphone (Fire-Lite ECC-RPU)	1,046.17	14.10
28 47 21 21-0009	EA	Distributed (Remote) Audio Amplifier, 50 Watts (Fire-Lite ECC-50DA)	1,001.97	56.40
28 47 21 21-0010	EA	Distributed (Remote) Audio Amplifier, 125 Watts (Fire-Lite ECC-125DA)	1,729.69	56.40
28 47 21 21-0011	EA	Distributed (Remote) Audio Amplifier With Backup, 50/100 Watts (Fire-Lite ECC50BDA)	2,747.79	56.40
28 47 21 21-0012	EA	100 Watt Primary / 50 Watt Back-up Remote Amplifier Expander Card (Fire-Lite ECC-50WBU)	1,346.61	28.20
28 47 21 21-0013	EA	Distributed Audio Speaker Circuit/Zone Expander Module (Fire-Lite ECC-CE4)	414.25	28.20
28 47 21 21-0014	EA	Addressable Mini-Monitor Module (Fire-Lite MMF-301)	95.50	28.20

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 47 21 21-0015	EA	Thumb Latch (Fire-Lite THUMBLTCH)	53.29	11.28
28 47 21 21-0016	EA	25-120 Ampere-Hours (AH) Battery Charger (Fire-Lite CHG-120F)	752.94	11.28
28 47 21 21-0017	EA	Replacement Microphone (Fire-Lite ECC-MICROPHONE)	154.76	11.28
28 47 21 21-0018	EA	12 Volt, 7 Ampere-Hour (AH) Battery (Fire-Lite BAT-1270)	286.77	28.20
28 47 21 21-0019	EA	12 Volt, 12 Ampere-Hour (AH) Battery (Fire-Lite BAT-12120)	369.10	28.20
28 47 21 21-0020	EA	12 Volt, 18 Ampere-Hour (AH) Battery (Fire-Lite BAT-12180)	273.41	28.20

28 49 Electronic Personal Protection Systems *(28 40)*

28 49 11 Electronic Personal Safety Detection Systems *(28 49)*

28 49 11 00-0001 Personnel Alarm Locating System *(28 49 11)*

Note: Includes a central computer, 17" VGA color monitor, keyboard and mouse, personal alarm locating software, a printer, interface cards and panels, eighty (80) personal alarm transmitters with lithium batteries, eighty (80) lapel readers, two hundred fifty (250) IR locators, twenty one (21) repeaters and receivers, back boxes, cables.

28 49 11 00-0002	EA	Personnel Alarm Locating System Note: Includes Pentium III central computer, 17" VGA color monitor, keyboard and mouse, personal alarm locating software, a printer, interface cards and panels.	24,870.38	905.46
28 49 11 00-0003	EA	Personnel Alarm Transmitters With Lithium Batteries	199.85	
28 49 11 00-0004	EA	Lapel Reader	76.86	
28 49 11 00-0005	EA	IR Locator	267.63	33.90
28 49 11 00-0006	EA	Repeaters And Receivers	641.06	113.00

28 49 11 00-0007 Identipass Card Access Control System *(28 49 11)*

Note: Excludes wiring and programming.

28 49 11 00-0008	EA	Indala Proximity Keytags (IDENT ASC-116)	9.64	
28 49 11 00-0009	EA	Indala Flexcard Proximity Card, 26bit (IDENT ASC-121T)	5.63	
28 49 11 00-0010	EA	Communications Converter (IDENT F55-485/conv)	619.69	28.20
28 49 11 00-0011	EA	4-Door Controller (IDENT F55-9CTLR/6)	4,644.56	225.60
28 49 11 00-0012	EA	User Interface (IDENT F55-IPASSU)	2,553.71	56.40
28 49 11 00-0013	EA	Network Interface (IDENT F55-NETLINK)	688.60	56.40
28 49 11 00-0014	EA	4-Reader Expansion Board (IDENT F55-RDR/EXPD)	1,846.40	28.20
28 49 11 00-0015	EA	Remote Input/Output Board (IDENT F55-RIO/BRD)	2,973.26	141.01
28 49 11 00-0016	EA	Proximity Card Reader (IDENT F55-L/F 26SB)	663.71	112.80
28 49 11 00-0017	EA	Slimline Flexpass Proximity Card Reader (IDENT F60-L/F26SB)	663.71	112.80
28 49 11 00-0018	EA	Proximity Card Reader (IDENT F60 L/F 28WB)	663.71	112.80

28 49 17 Electronic Personal Safety Emergency Aid Devices *(28 49)*

28 49 17 00-0001 Electronic Personal Safety Emergency Aid Devices (Edwards Signaling) *(28 49 17)*

28 49 17 00-0002 Call For Assistance Kits, Emergency Aid Devices (Edwards Signaling) *(28 49 17 00-0001)*

28 49 17 00-0003	EA	Pull Cord Call For Assistance Kit With Strobe/Buzzer, Emergency Aid Devices (Edwards Signaling 7008B-N5) Note: Includes 1 high intensity strobe/buzzer (7007B-N5) and 1 emergency pull cord station (6537).	339.02	67.80
28 49 17 00-0004	EA	Push Button Call For Assistance Kit With Strobe/Horn, Emergency Aid Devices (Edwards Signaling 7005-G5) Note: Includes 1 high intensity strobe/horn (6536-G5), 1 emergency pull cord station (6537), and 1 transformer 592.	402.79	79.10
28 49 17 00-0005	EA	Pull Cord Call For Assistance Kit With Strobe/Horn, Emergency Aid Devices (Edwards Signaling 6538-G5) Note: Includes 1 high intensity strobe/horn (6536-G5), 1 wall mounted push button (620/147-10), and 1 transformer 592.	406.01	79.10

28 49 17 00-0006 Audible/Visual Signaling Devices, Emergency Aid Devices (Edwards Signaling) *(28 49 17 00-0001)*

28 49 17 00-0007	EA	High Intensity Strobe/Buzzer, Emergency Aid Devices (Edwards Signaling 7007B-N5)	252.43	42.38
28 49 17 00-0008	EA	High Intensity Strobe/Horn, Emergency Aid Devices (Edwards Signaling 6536-G5)	248.70	33.90
28 49 17 00-0009	EA	Transformer For High Intensity Strobe/Horns, Emergency Aid Devices (Edwards Signaling 592)	108.38	33.90
28 49 17 00-0010	EA	1 Lamp, Dome Station, Emergency Aid Devices (Edwards Signaling 7641-1N5)	198.88	33.90
28 49 17 00-0011	EA	2 Lamp, Dome Station, Emergency Aid Devices (Edwards Signaling 7641-2N5)	231.23	33.90
28 49 17 00-0012	EA	4 Lamp, Dome Station, Emergency Aid Devices (Edwards Signaling 7641-4G5)	264.81	33.90
28 49 17 00-0013	EA	2 Lamp, Dome Station/Buzzer, Emergency Aid Devices (Edwards Signaling 7633-2)	372.75	33.90
28 49 17 00-0014	EA	4 Lamp, Dome Station/Buzzer, Emergency Aid Devices (Edwards Signaling 7633-4)	419.19	33.90

28 49 17 00-0015 Call Activation Devices, Emergency Aid Devices (Edwards Signaling) *(28 49 17 00-0001)*

28 49 17 00-0016	EA	Double Pole Single Throw Switch, Pull Cord Station With Stainless Steel Face Plate, Emergency Aid Devices (Edwards Signaling 6537)	148.98	33.90
28 49 17 00-0017	EA	Pushbutton Wall Station/Indicator Lamp With Stainless Steel Face Plate, Emergency Aid Devices (Edwards Signaling 7603E)	226.11	33.90
28 49 17 00-0018	EA	Pushbutton Wall Station/Indicator Lamp With Stainless Steel Face Plate, Emergency Aid Devices (Edwards Signaling 7613E)	300.57	33.90
28 49 17 00-0019	EA	3 Maintained Contacts, Pull Cord Station With Stainless Steel Face Plate, Emergency Aid Devices (Edwards Signaling 7302)	331.88	11.30
28 49 17 00-0020	EA	Bedside Wall Station Receptacle, Emergency Aid Devices (Edwards Signaling 7930)	233.00	33.90
28 49 17 00-0021	EA	Bedside Wall Station Receptacle With Lamp, Emergency Aid Devices (Edwards Signaling 7930L)	277.53	33.90
28 49 17 00-0022	EA	Locking Button, Pull Cord Station With Stainless Steel Face Plate, Emergency Aid Devices (Edwards Signaling 7932L)	480.47	33.90

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
28 49 17 00-0023	EA	Pendant Push Button, Emergency Aid Devices (Edwards Signaling 7620)	220.75	33.90
28 49 17 00-0024	EA	Single 6' Calling Cord Set For Bedside Wall Station Receptacles, Emergency Aid Devices (Edwards Signaling 7675)	279.84	11.30
28 49 17 00-0025	EA	Double 6' Calling Cord Set For Bedside Wall Station Receptacles, Emergency Aid Devices (Edwards Signaling 7676)	435.27	11.30
28 49 17 00-0026	EA	Single 15' Calling Cord Set For Bedside Wall Station Receptacles, Emergency Aid Devices (Edwards Signaling 7685)	444.83	11.30
28 49 17 00-0027	EA	Double 15' Calling Cord Set For Bedside Wall Station Receptacles, Emergency Aid Devices (Edwards Signaling 7686)	587.55	11.30

END OF SECTION 28

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

THIS PAGE INTENTIONALLY LEFT BLANK

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

31 Earthwork

31 01 Maintenance of Earthwork *(31)*

31 01 20 Maintenance of Earth Moving *(31 01)*

31 01 20 00-0001 Rip Settling Basins *(31 01 20)*

Note: Rip through light soil and sand in settling basin. 8' on center (machine width).

31 01 20 00-0002	ACR	Rip Light Soil And Sand, By Dozer	780.46
31 01 20 00-0003	ACR	Rip Light Soil And Sand, By Grader With Rear Ripper	1,194.03
31 01 20 00-0004	ACR	Rip Light Soil And Sand, By Rubber Tire Front End Loader	1,034.55

31 05 Common Work Results for Earthwork *(31)*

31 05 13 Soils for Earthwork *(31 05)*

Note: Includes delivery up to 15 miles from the closest approved source and dumping. Excludes spreading or backfilling. See CSI section 01 74 19 00-0039 for hauling greater than 15 miles.

31 05 13 00-0001 Fill Material (Loose, Purchased Material) *(31 05 13)*

Note: Includes delivery up to 15 miles from the closest approved source, loading and dumping. Excludes spreading or backfilling. See CSI section 01 74 19 00-0039 for hauling greater than 15 miles.

31 05 13 00-0002	CY	Bank Run/Fill Sand	40.42
		For Up To 8, Add	*8.08*
		For >8 To 16, Add	*4.04*
		For >48 To 64, Deduct	*-3.01*
		For >64 To 96, Deduct	*-5.03*
		For >96 To 168, Deduct	*-7.05*
		For >168 To 240, Deduct	*-8.56*
		For >240, Deduct	*-10.06*
31 05 13 00-0003	CY	Screened/Washed Filter/Septic Sand	52.04
		For Up To 8, Add	*10.41*
		For >8 To 16, Add	*5.20*
		For >48 To 64, Deduct	*-3.59*
		For >64 To 96, Deduct	*-6.19*
		For >96 To 168, Deduct	*-8.80*
		For >168 To 240, Deduct	*-10.59*
		For >240, Deduct	*-12.39*
31 05 13 00-0004	CY	3/8" Minus, ASTM C33, Screened/Washed Bedding Sand	67.25
		For Up To 8, Add	*13.45*
		For >8 To 16, Add	*6.73*
		For >48 To 64, Deduct	*-4.35*
		For >64 To 96, Deduct	*-7.72*
		For >96 To 168, Deduct	*-11.08*
		For >168 To 240, Deduct	*-13.25*
		For >240, Deduct	*-15.43*
31 05 13 00-0005	CY	3/16" Minus, Screened/Washed Concrete Sand	58.20
		For Up To 8, Add	*11.64*
		For >8 To 16, Add	*5.82*
		For >48 To 64, Deduct	*-3.90*
		For >64 To 96, Deduct	*-6.81*
		For >96 To 168, Deduct	*-9.72*
		For >168 To 240, Deduct	*-11.67*
		For >240, Deduct	*-13.62*
31 05 13 00-0006	CY	3/32" Minus, Screened/Washed Masonry/Mortar Sand	102.30
		For Up To 8, Add	*20.46*
		For >8 To 16, Add	*10.23*
		For >48 To 64, Deduct	*-6.11*
		For >64 To 96, Deduct	*-11.22*
		For >96 To 168, Deduct	*-16.34*
		For >168 To 240, Deduct	*-19.39*
		For >240, Deduct	*-22.44*
31 05 13 00-0007	CY	Common Fill, Native Soil/Dirt	44.18
		For Up To 8, Add	*8.84*
		For >8 To 16, Add	*4.42*
		For >48 To 64, Deduct	*-3.20*
		For >64 To 96, Deduct	*-5.41*
		For >96 To 168, Deduct	*-7.62*
		For >168 To 240, Deduct	*-9.22*
		For >240, Deduct	*-10.82*
31 05 13 00-0008	CY	Lime Rock Screening	41.66
		For Up To 8, Add	*8.33*
		For >8 To 16, Add	*4.17*
		For >48 To 64, Deduct	*-3.07*
		For >64 To 96, Deduct	*-5.16*
		For >96 To 168, Deduct	*-7.24*
		For >168 To 240, Deduct	*-8.78*
		For >240, Deduct	*-10.31*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
31 05 13 00-0009	CY	Crushed Lime Rock Maximum 3-1/2"	41.66	
		For Up To 8, Add	*8.33*	
		For >8 To 16, Add	*4.17*	
		For >48 To 64, Deduct	*-3.07*	
		For >64 To 96, Deduct	*-5.16*	
		For >96 To 168, Deduct	*-7.24*	
		For >168 To 240, Deduct	*-8.78*	
		For >240, Deduct	*-10.31*	
31 05 13 00-0010	CY	Sand/Clay	42.22	
		For Up To 8, Add	*8.44*	
		For >8 To 16, Add	*4.22*	
		For >48 To 64, Deduct	*-3.10*	
		For >64 To 96, Deduct	*-5.21*	
		For >96 To 168, Deduct	*-7.32*	
		For >168 To 240, Deduct	*-8.87*	
		For >240, Deduct	*-10.42*	
31 05 13 00-0011	CY	Recycled Concrete Aggregate	37.86	
		For Up To 8, Add	*7.57*	
		For >8 To 16, Add	*3.79*	
		For >48 To 64, Deduct	*-2.88*	
		For >64 To 96, Deduct	*-4.78*	
		For >96 To 168, Deduct	*-6.67*	
		For >168 To 240, Deduct	*-8.11*	
		For >240, Deduct	*-9.55*	
31 05 13 00-0012	CY	Pit Run Clay	55.33	
		For Up To 8, Add	*11.07*	
		For >8 To 16, Add	*5.53*	
		For >48 To 64, Deduct	*-3.76*	
		For >64 To 96, Deduct	*-6.52*	
		For >96 To 168, Deduct	*-9.29*	
		For >168 To 240, Deduct	*-11.17*	
		For >240, Deduct	*-13.05*	
31 05 13 00-0013	CY	Light Clay / Loam	51.09	
		For Up To 8, Add	*10.22*	
		For >8 To 16, Add	*5.11*	
		For >48 To 64, Deduct	*-3.54*	
		For >64 To 96, Deduct	*-6.10*	
		For >96 To 168, Deduct	*-8.65*	
		For >168 To 240, Deduct	*-10.43*	
		For >240, Deduct	*-12.20*	
31 05 13 00-0014	CY	Heavy Clay	61.60	
		For Up To 8, Add	*12.32*	
		For >8 To 16, Add	*6.16*	
		For >48 To 64, Deduct	*-4.07*	
		For >64 To 96, Deduct	*-7.15*	
		For >96 To 168, Deduct	*-10.23*	
		For >168 To 240, Deduct	*-12.27*	
		For >240, Deduct	*-14.30*	

31 05 16 Aggregates for Earthwork *(31 05)*

See CSI section 01 74 19 00-0039 for hauling greater than 15 miles.

31 05 16 00-0001 Aggregate (Loose, Purchased Material) *(31 05 16)*

Note: Includes delivery up to 15 miles from the closest approved source, loading and dumping. Excludes spreading or backfilling. See CSI section 01 74 19 00-0039 for hauling greater than 15 miles.

31 05 16 00-0002	CY	#2 (1-1/2" To 2-1/2" Clean) Stone Aggregate Fill	54.09	
		For Up To 8, Add	*10.82*	
		For >8 To 16, Add	*5.41*	
		For >48 To 64, Deduct	*-3.69*	
		For >64 To 96, Deduct	*-6.40*	
		For >96 To 168, Deduct	*-9.10*	
		For >168 To 240, Deduct	*-10.95*	
		For >240, Deduct	*-12.80*	
31 05 16 00-0003	CY	#3 (1" To 2" Clean) Stone Aggregate Fill	56.10	
		For Up To 8, Add	*11.22*	
		For >8 To 16, Add	*5.61*	
		For >48 To 64, Deduct	*-3.80*	
		For >64 To 96, Deduct	*-6.60*	
		For >96 To 168, Deduct	*-9.41*	
		For >168 To 240, Deduct	*-11.30*	
		For >240, Deduct	*-13.20*	
31 05 16 00-0004	CY	#4 (3/4" To 1-1/2" Clean) Stone Aggregate Fill	54.09	
		For Up To 8, Add	*10.82*	
		For >8 To 16, Add	*5.41*	
		For >48 To 64, Deduct	*-3.69*	
		For >64 To 96, Deduct	*-6.40*	
		For >96 To 168, Deduct	*-9.10*	
		For >168 To 240, Deduct	*-10.95*	
		For >240, Deduct	*-12.80*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
31 05 16 00-0005	CY	#5 (1/2" To 1" Clean) Stone Aggregate Fill	57.56	
		For Up To 8, Add	*11.51*	
		For >8 To 16, Add	*5.76*	
		For >48 To 64, Deduct	*-3.87*	
		For >64 To 96, Deduct	*-6.75*	
		For >96 To 168, Deduct	*-9.62*	
		For >168 To 240, Deduct	*-11.56*	
		For >240, Deduct	*-13.49*	
31 05 16 00-0006	CY	#6 (3/8" To 3/4" Clean) Stone Aggregate Fill	59.60	
		For Up To 8, Add	*11.92*	
		For >8 To 16, Add	*5.96*	
		For >48 To 64, Deduct	*-3.97*	
		For >64 To 96, Deduct	*-6.95*	
		For >96 To 168, Deduct	*-9.93*	
		For >168 To 240, Deduct	*-11.92*	
		For >240, Deduct	*-13.90*	
31 05 16 00-0007	CY	#56 (3/8" To 1") Stone Aggregate Fill	57.88	
		For Up To 8, Add	*11.58*	
		For >8 To 16, Add	*5.79*	
		For >48 To 64, Deduct	*-3.88*	
		For >64 To 96, Deduct	*-6.78*	
		For >96 To 168, Deduct	*-9.67*	
		For >168 To 240, Deduct	*-11.61*	
		For >240, Deduct	*-13.56*	
31 05 16 00-0008	CY	#57 (3/8" To 1") Stone Aggregate Fill	61.44	
		For Up To 8, Add	*12.29*	
		For >8 To 16, Add	*6.14*	
		For >48 To 64, Deduct	*-4.06*	
		For >64 To 96, Deduct	*-7.13*	
		For >96 To 168, Deduct	*-10.21*	
		For >168 To 240, Deduct	*-12.24*	
		For >240, Deduct	*-14.27*	
31 05 16 00-0009	CY	#67 Or #68 (3/16" To 3/4") Stone Aggregate Fill	55.99	
		For Up To 8, Add	*11.20*	
		For >8 To 16, Add	*5.60*	
		For >48 To 64, Deduct	*-3.79*	
		For >64 To 96, Deduct	*-6.59*	
		For >96 To 168, Deduct	*-9.39*	
		For >168 To 240, Deduct	*-11.28*	
		For >240, Deduct	*-13.18*	
31 05 16 00-0010	CY	#7I (3/8" To 1/2") Stone Aggregate Fil	56.98	
		For Up To 8, Add	*11.40*	
		For >8 To 16, Add	*5.70*	
		For >48 To 64, Deduct	*-3.84*	
		For >64 To 96, Deduct	*-6.69*	
		For >96 To 168, Deduct	*-9.54*	
		For >168 To 240, Deduct	*-11.46*	
		For >240, Deduct	*-13.38*	
31 05 16 00-0011	CY	#78 (3/32" To 1/2") Stone Aggregate Fill	57.41	
		For Up To 8, Add	*11.48*	
		For >8 To 16, Add	*5.74*	
		For >48 To 64, Deduct	*-3.86*	
		For >64 To 96, Deduct	*-6.73*	
		For >96 To 168, Deduct	*-9.60*	
		For >168 To 240, Deduct	*-11.53*	
		For >240, Deduct	*-13.46*	
31 05 16 00-0012	CY	#8 (3/32" To 3/8") Stone Aggregate Fill	59.60	
		For Up To 8, Add	*11.92*	
		For >8 To 16, Add	*5.96*	
		For >48 To 64, Deduct	*-3.97*	
		For >64 To 96, Deduct	*-6.95*	
		For >96 To 168, Deduct	*-9.93*	
		For >168 To 240, Deduct	*-11.92*	
		For >240, Deduct	*-13.90*	
31 05 16 00-0013	CY	#89 (1/16" To 3/8") Stone Aggregate Fill	60.22	
		For Up To 8, Add	*12.04*	
		For >8 To 16, Add	*6.02*	
		For >48 To 64, Deduct	*-4.00*	
		For >64 To 96, Deduct	*-7.01*	
		For >96 To 168, Deduct	*-10.02*	
		For >168 To 240, Deduct	*-12.02*	
		For >240, Deduct	*-14.02*	
31 05 16 00-0014	CY	#9 (3/32" To 3/16") Stone Aggregate Fill	59.60	
		For Up To 8, Add	*11.92*	
		For >8 To 16, Add	*5.96*	
		For >48 To 64, Deduct	*-3.97*	
		For >64 To 96, Deduct	*-6.95*	
		For >96 To 168, Deduct	*-9.93*	
		For >168 To 240, Deduct	*-11.92*	
		For >240, Deduct	*-13.90*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
31 05 16 00-0015	CY	#10 (1/16" To 3/16") Stone Aggregate Fill	60.86	
		For Up To 8, Add	*12.17*	
		For >8 To 16, Add	*6.09*	
		For >48 To 64, Deduct	*-4.03*	
		For >64 To 96, Deduct	*-7.08*	
		For >96 To 168, Deduct	*-10.12*	
		For >168 To 240, Deduct	*-12.14*	
		For >240, Deduct	*-14.15*	
31 05 16 00-0016	CY	#610 (1/16" To 3/4") Modified Stone Aggregate Fill	60.22	
		For Up To 8, Add	*12.04*	
		For >8 To 16, Add	*6.02*	
		For >48 To 64, Deduct	*-4.00*	
		For >64 To 96, Deduct	*-7.01*	
		For >96 To 168, Deduct	*-10.02*	
		For >168 To 240, Deduct	*-12.02*	
		For >240, Deduct	*-14.02*	
31 05 16 00-0017	CY	3/16" Max Screenings Stone Aggregate Fill	51.27	
		For Up To 8, Add	*10.25*	
		For >8 To 16, Add	*5.13*	
		For >48 To 64, Deduct	*-3.55*	
		For >64 To 96, Deduct	*-6.12*	
		For >96 To 168, Deduct	*-8.68*	
		For >168 To 240, Deduct	*-10.46*	
		For >240, Deduct	*-12.23*	
31 05 16 00-0018	CY	Over 6" To 12" Stone Aggregate Fill, Random Size	55.32	
		For Up To 8, Add	*11.06*	
		For >8 To 16, Add	*5.53*	
		For >48 To 64, Deduct	*-3.76*	
		For >64 To 96, Deduct	*-6.52*	
		For >96 To 168, Deduct	*-9.29*	
		For >168 To 240, Deduct	*-11.17*	
		For >240, Deduct	*-13.04*	
31 05 16 00-0019	CY	Over 6" To 12" Graded Stone Aggregate Fill	55.32	
		For Up To 8, Add	*11.06*	
		For >8 To 16, Add	*5.53*	
		For >48 To 64, Deduct	*-3.76*	
		For >64 To 96, Deduct	*-6.52*	
		For >96 To 168, Deduct	*-9.29*	
		For >168 To 240, Deduct	*-11.17*	
		For >240, Deduct	*-13.04*	
31 05 16 00-0020	CY	3" To 7" Surge Stone Aggregate Fill, Random Size	59.36	
		For Up To 8, Add	*11.87*	
		For >8 To 16, Add	*5.94*	
		For >48 To 64, Deduct	*-3.96*	
		For >64 To 96, Deduct	*-6.93*	
		For >96 To 168, Deduct	*-9.89*	
		For >168 To 240, Deduct	*-11.87*	
		For >240, Deduct	*-13.85*	
31 05 16 00-0021	CY	3" To 7" Surge Stone Graded Aggregate Fill	62.24	
		For Up To 8, Add	*12.45*	
		For >8 To 16, Add	*6.22*	
		For >48 To 64, Deduct	*-4.10*	
		For >64 To 96, Deduct	*-7.21*	
		For >96 To 168, Deduct	*-10.33*	
		For >168 To 240, Deduct	*-12.38*	
		For >240, Deduct	*-14.43*	
31 05 16 00-0022	CY	2-1/2" Minus Crusher Run Aggregate Fill	37.20	
		For Up To 8, Add	*7.44*	
		For >8 To 16, Add	*3.72*	
		For >48 To 64, Deduct	*-2.85*	
		For >64 To 96, Deduct	*-4.71*	
		For >96 To 168, Deduct	*-6.57*	
		For >168 To 240, Deduct	*-8.00*	
		For >240, Deduct	*-9.42*	
31 05 16 00-0023	CY	1-1/2" Minus Crusher Run Aggregate Fill	40.38	
		For Up To 8, Add	*8.08*	
		For >8 To 16, Add	*4.04*	
		For >48 To 64, Deduct	*-3.01*	
		For >64 To 96, Deduct	*-5.03*	
		For >96 To 168, Deduct	*-7.05*	
		For >168 To 240, Deduct	*-8.55*	
		For >240, Deduct	*-10.06*	
31 05 16 00-0024	CY	3/4" Minus Crusher Run Aggregate Fill	38.32	
		For Up To 8, Add	*7.66*	
		For >8 To 16, Add	*3.83*	
		For >48 To 64, Deduct	*-2.91*	
		For >64 To 96, Deduct	*-4.82*	
		For >96 To 168, Deduct	*-6.74*	
		For >168 To 240, Deduct	*-8.19*	
		For >240, Deduct	*-9.64*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
31 05 16 00-0025	CY	Miscellaneous Crushed Base, Processed Concrete, Paving	70.28	
		For Up To 8, Add	*14.06*	
		For >8 To 16, Add	*7.03*	
		For >48 To 64, Deduct	*-4.50*	
		For >64 To 96, Deduct	*-8.02*	
		For >96 To 168, Deduct	*-11.53*	
		For >168 To 240, Deduct	*-13.78*	
		For >240, Deduct	*-16.04*	

31 05 36 Equipment Delivery, Pickup, Mobilization and Demobilization *(31 05)*

See CSI section 01 71 13 00-0001 for equipment delivery, pickup, mobilization and demobilization.

31 20 Earth Moving *(31)*

Note: Per OSHA -Soil Classification - 1926 Subpart P App A. Light material: Class A site material, normally referred to as "easy digging". Consisting of loose, soft, free running materials. Close lying, which will fill blade, digger or bucket to capacity, and frequently provide a heaped load. Materials such as dry sand, small gravel, unpacked earth, loam, etc., would fall into this category. Medium material: Class B site material, normally referred to as "medium and tough, wet and sticky clay would be examples of this medium digging", consisting of harder materials that are not difficult to dig without assistance such as ripping, blasting, etc. Material break up with some bulkiness causing voids in digger or bucket. Materials such as packed earth, common earth with some clay, soil with less than 25% rock content would be examples of this category. Heavy/wet material: Class C site material, normally referred to as "hard digging", consisting of materials which may require some assistance in breaking up. Bulky and somewhat hard to penetrate materials would be found in this category and voids in dipper or bucket would be common. Materials such as very hard packed soil, with up to 50% to 70% rock content and hard category. Soil conditions will be determined by soil analysis to provide appropriate percentage (%) for the various types of soil conditions. Apply the percentages to the various soil types to generate an appropriate representation of the soil condition.

31 22 Grading *(31 20)*

31 22 13 Rough Grading *(31 22)*

See CSI section 31 23 16 00-0000 for rough grading.

31 22 16 Fine Grading *(31 22)*

31 22 16 13 Roadway Subgrade Reshaping *(31 22 16)*

See CSI section 31 23 16 00-0000 for bulk shaping and grading.

31 22 19 Finish Grading *(31 22)*

31 22 19 13 Spreading and Grading Topsoil *(31 22 19)*

31 22 19 13-0001 Site Grading For Areas Outside Of Structures And Slabs *(31 22 19 13)*

Note: Use of bobcat type equipment or hand for finish grading for positive drainage.

31 22 19 13-0002 Hand Digging And Grading *(31 22 19 13-0001)*

31 22 19 13-0003	SF	Trim And Shape Machine Excavated Area By Hand Finish Grade	1.19
31 22 19 13-0004	SF	Trim And Shape Area On Grade By Hand, Finish Grade	1.09
31 22 19 13-0005	SF	Fine Grade Gravel Bedding By Hand Finish Grade	1.13
31 22 19 13-0006	SF	Fine Grade Gravel By Hand Finish Grade	0.95

31 22 19 13-0007 Machine Operations *(31 22 19 13-0001)*

31 22 19 13-0008 Machine Operations With Grader *(31 22 19 13-0007)*

31 22 19 13-0009	CSY	Semi-Grade, 2 Passes With Grader	475.52
31 22 19 13-0010	CSY	Fine Grade, 3 Passes With Grader	660.44

31 23 Excavation and Fill *(31 20)*

31 23 16 Excavation *(31 23)*

31 23 16 13 Trenching *(31 23 16)*

Note: Use this section for trenching operations even if the total project volume exceeds 500 CY. Use tasks for work by hand only for areas not accessible by machine.

31 23 16 13-0001 Excavation For Trenching By Machine *(31 23 16 13)*

Note: Includes stockpiling excess materials and trimming sides and bottom of trench.

31 23 16 13-0002	CY	12" Wide or Less, Excavation for Trenching by Machine in Soil	12.53
		For Excavation In Light Material (Class A), Deduct	*-1.57*
		For Excavation In Heavy/Wet Material (Class C), Add	*5.01*
		For Up To 20, Add	*12.53*
		For >20 To 50, Add	*9.40*
		For >50 To 250, Add	*5.01*
		For >250 To 500, Add	*1.88*
		For >1,000, Deduct	*-1.88*
31 23 16 13-0003	CY	Over 12" Wide, Excavation for Trenching by Machine in Soil	8.14
		For Excavation In Light Material (Class A), Deduct	*-1.02*
		For Excavation In Heavy/Wet Material (Class C), Add	*3.26*
		For Up To 20, Add	*8.14*
		For >20 To 50, Add	*6.11*
		For >50 To 250, Add	*3.26*
		For >250 To 500, Add	*1.22*
		For >1,000, Deduct	*-1.22*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
31 23 16 13-0004	CY	12" Wide or Less, Excavation for Trenching by Machine in Loose Rock Note: Includes compacted aggregate	20.75	
		For Up To 20, Add	*20.75*	
		For >20 To 50, Add	*15.56*	
		For >50 To 250, Add	*8.30*	
		For >250 To 500, Add	*3.11*	
		For >1,000, Deduct	*-3.11*	
31 23 16 13-0005	CY	Over 12" Wide, Excavation for Trenching by Machine in Loose Rock Note: Includes compacted aggregate	14.47	
		For Up To 20, Add	*14.47*	
		For >20 To 50, Add	*10.85*	
		For >50 To 250, Add	*5.79*	
		For >250 To 500, Add	*2.17*	
		For >1,000, Deduct	*-2.17*	

31 23 16 13-0006 Excavation For Trenching By Hand *(31 23 16 13)*

31 23 16 13-0007	CY	Excavation For Trenching By Hand In Soil Note: Includes stockpiling excess materials and trimming sides and bottom of trench.	143.85	
31 23 16 13-0008	CY	Excavation For Trenching By Hand In Loose Rock Or Compacted Aggregate Note: Includes stockpiling excess materials and trimming sides and bottom of trench.	246.74	
31 23 16 13-0009	SF	Trim Bottom Of Excavation Hand Labor Note: For use with machine excavation.	1.12	
31 23 16 13-0010	SF	Trim Slopes/Sides Of Excavation Hand Labor Note: For use with machine excavation.	1.29	

31 23 16 13-0011 Backfilling Or Placing Subbase For Trenches *(31 23 16 13)*

Note: With imported or stockpiled materials.

31 23 16 13-0012	CY	Backfilling or Placing Subbase for Trenches with Imported or Stockpiled Materials by Machine	4.62	
		For Up To 20, Add	*4.62*	
		For >20 To 50, Add	*3.47*	
		For >50 To 250, Add	*1.85*	
		For >250 To 500, Add	*0.69*	
		For >1,000, Deduct	*-0.69*	
31 23 16 13-0013	CY	Backfilling or Placing Subbase for Trenches with Imported or Stockpiled Materials by Hand	39.96	

31 23 16 13-0014 Compaction Of Fill Or Subbase For Trenches *(31 23 16 13)*

Note: Includes restoration of final grade.

31 23 16 13-0015	CY	Compaction of Fill or Subbase for Trenches by Vibratory Plate, Air Tamper, etc.	8.35	
		For Up To 20, Add	*8.35*	
		For >20 To 50, Add	*6.26*	
		For >50 To 250, Add	*3.34*	
		For >250 To 500, Add	*1.25*	
		For >1,000, Deduct	*-1.25*	
31 23 16 13-0016	CY	Compaction of Fill or Subbase for Trenches by Hand	45.08	

31 23 16 13-0017 Loading Excess Material For Removal From Excavation For Trenches *(31 23 16 13)*

Note: Includes handwork by laborer for cleanup. Not to be used when excavated material can be loaded directly into truck instead of stockpiling. See CSI section 01 74 19 00-0039 for hauling.

31 23 16 13-0018	CY	Load Excess Material by Machine for Removal from Excavation for Trenching	8.02	
		For Up To 20, Add	*8.02*	
		For >20 To 50, Add	*6.02*	
		For >50 To 250, Add	*3.21*	
		For >250 To 500, Add	*1.20*	
		For >1,000, Deduct	*-1.20*	
31 23 16 13-0019	CY	Load Excess Material by Hand for Removal from Excavation for Trenching	105.48	

31 23 16 13-0020 Spread Excess Or Imported Material For Trenches *(31 23 16 13)*

Note: Includes hand work by laborer for cleanup.

31 23 16 13-0021	CY	Spread Excess Or Imported Material On Site With Machine	3.82	
		For Up To 20, Add	*3.82*	
		For >20 To 50, Add	*2.87*	
		For >50 To 250, Add	*1.53*	
		For >250 To 500, Add	*0.57*	
		For >1,000, Deduct	*-0.57*	

31 23 16 13-0022 Direct Burial (Plowed-in) Cable Or Piping By Machine *(31 23 16 13)*

Note: Includes trench, backfill, compaction and restoration of final grade.

31 23 16 13-0023	LF	Direct Burial of Cable or Piping up to 12" Deep	2.83	
31 23 16 13-0024	LF	Direct Burial of Cable or Piping >12" to 24" Deep	3.12	
31 23 16 13-0025	LF	Direct Burial of Cable or Piping >24" to 36" Deep	4.44	
31 23 16 13-0026	LF	Direct Burial of Cable or Piping >36" to 48" Deep	5.01	

31 23 16 13-0027 Utility Chain Trencher *(31 23 16 13)*

31 23 16 13-0028 Utility Trench, Chain Trencher *(31 23 16 13-0027)*

Note: Earth left adjacent to trench.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
31 23 16 13-0029	LF	4" Wide, 12" Deep Trench, Medium Soil, Chain Trencher	1.56	
		For >100 To 250, Deduct	*-0.11*	
		For >250 To 500, Deduct	*-0.23*	
		For >500, Deduct	*-0.47*	
31 23 16 13-0030	LF	4" Wide, 18" Deep Trench, Medium Soil, Chain Trencher	1.71	
		For >100 To 250, Deduct	*-0.12*	
		For >250 To 500, Deduct	*-0.26*	
		For >500, Deduct	*-0.51*	
31 23 16 13-0031	LF	4" Wide, 24" Deep Trench, Medium Soil, Chain Trencher	1.77	
		For >100 To 250, Deduct	*-0.12*	
		For >250 To 500, Deduct	*-0.27*	
		For >500, Deduct	*-0.53*	
31 23 16 13-0032	LF	6" Wide, 12" Deep Trench, Medium Soil, Chain Trencher	1.86	
		For >100 To 250, Deduct	*-0.13*	
		For >250 To 500, Deduct	*-0.28*	
		For >500, Deduct	*-0.56*	
31 23 16 13-0033	LF	6" Wide, 18" Deep Trench, Medium Soil, Chain Trencher	2.05	
		For >100 To 250, Deduct	*-0.14*	
		For >250 To 500, Deduct	*-0.31*	
		For >500, Deduct	*-0.62*	
31 23 16 13-0034	LF	6" Wide, 24" Deep Trench, Medium Soil, Chain Trencher	2.33	
		For >100 To 250, Deduct	*-0.16*	
		For >250 To 500, Deduct	*-0.35*	
		For >500, Deduct	*-0.70*	
31 23 16 13-0035	LF	6" Wide, 36" Deep Trench, Medium Soil, Chain Trencher	2.80	
		For >100 To 250, Deduct	*-0.20*	
		For >250 To 500, Deduct	*-0.42*	
		For >500, Deduct	*-0.84*	
31 23 16 13-0036	LF	8" Wide, 12" Deep Trench, Medium Soil, Chain Trencher	2.64	
		For >100 To 250, Deduct	*-0.18*	
		For >250 To 500, Deduct	*-0.40*	
		For >500, Deduct	*-0.79*	
31 23 16 13-0037	LF	8" Wide, 18" Deep Trench, Medium Soil, Chain Trencher	3.11	
		For >100 To 250, Deduct	*-0.22*	
		For >250 To 500, Deduct	*-0.47*	
		For >500, Deduct	*-0.93*	
31 23 16 13-0038	LF	8" Wide, 24" Deep Trench, Medium Soil, Chain Trencher	3.53	
		For >100 To 250, Deduct	*-0.25*	
		For >250 To 500, Deduct	*-0.53*	
		For >500, Deduct	*-1.06*	
31 23 16 13-0039	LF	8" Wide, 36" Deep Trench, Medium Soil, Chain Trencher	4.19	
		For >100 To 250, Deduct	*-0.29*	
		For >250 To 500, Deduct	*-0.63*	
		For >500, Deduct	*-1.26*	

31 23 16 13-0040 Backfill Trenches With Compaction *(31 23 16 13-0027)*

31 23 16 13-0041	LF	Backfill 4" Wide, 12" Deep Trench, With Compaction	0.25	
		For >100 To 250, Deduct	*-0.02*	
		For >250 To 500, Deduct	*-0.04*	
		For >500, Deduct	*-0.08*	
31 23 16 13-0042	LF	Backfill 4" Wide, 18" Deep Trench, With Compaction	0.37	
		For >100 To 250, Deduct	*-0.03*	
		For >250 To 500, Deduct	*-0.06*	
		For >500, Deduct	*-0.11*	
31 23 16 13-0043	LF	Backfill 4" Wide, 24" Deep Trench, With Compaction	0.50	
		For >100 To 250, Deduct	*-0.04*	
		For >250 To 500, Deduct	*-0.08*	
		For >500, Deduct	*-0.15*	
31 23 16 13-0044	LF	Backfill 6" Wide, 12" Deep Trench, With Compaction	0.37	
		For >100 To 250, Deduct	*-0.03*	
		For >250 To 500, Deduct	*-0.06*	
		For >500, Deduct	*-0.11*	
31 23 16 13-0045	LF	Backfill 6" Wide, 18" Deep Trench, With Compaction	0.50	
		For >100 To 250, Deduct	*-0.04*	
		For >250 To 500, Deduct	*-0.08*	
		For >500, Deduct	*-0.15*	
31 23 16 13-0046	LF	Backfill 6" Wide, 24" Deep Trench, With Compaction	0.76	
		For >100 To 250, Deduct	*-0.05*	
		For >250 To 500, Deduct	*-0.11*	
		For >500, Deduct	*-0.23*	
31 23 16 13-0047	LF	Backfill 6" Wide, 36" Deep Trench, With Compaction	1.08	
		For >100 To 250, Deduct	*-0.08*	
		For >250 To 500, Deduct	*-0.16*	
		For >500, Deduct	*-0.32*	
31 23 16 13-0048	LF	Backfill 8" Wide, 12" Deep Trench, With Compaction	0.50	
		For >100 To 250, Deduct	*-0.04*	
		For >250 To 500, Deduct	*-0.08*	
		For >500, Deduct	*-0.15*	
31 23 16 13-0049	LF	Backfill 8" Wide, 18" Deep Trench, With Compaction	0.76	
		For >100 To 250, Deduct	*-0.05*	
		For >250 To 500, Deduct	*-0.11*	
		For >500, Deduct	*-0.23*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
31 23 16 13-0050	LF	Backfill 8" Wide, 24" Deep Trench, With Compaction	1.01	
		For >100 To 250, Deduct	*-0.07*	
		For >250 To 500, Deduct	*-0.15*	
		For >500, Deduct	*-0.30*	
31 23 16 13-0051	LF	Backfill 8" Wide, 36" Deep Trench, With Compaction	1.51	
		For >100 To 250, Deduct	*-0.11*	
		For >250 To 500, Deduct	*-0.23*	
		For >500, Deduct	*-0.45*	

31 23 16 16 Structural Excavation for Minor Structures *(31 23 16)*

31 23 16 16-0001 Post Holes *(31 23 16 16)*

Note: Excludes spreading of excess material on site or loading and removal of excavated material from site.

31 23 16 16-0002 Drilling Post Hole In Soil *(31 23 16 16-0001)*

Note: Auger by machine unless otherwise notified by owner.

31 23 16 16-0003	VLF	Up To 2-1/2" Diameter Hole, Auger By Machine Post Hole In Soil	10.89
31 23 16 16-0004	VLF	2-1/2" Diameter Hole, Auger By Machine Post Hole In Soil	12.25
31 23 16 16-0005	VLF	3" Diameter Hole, Auger By Machine Post Hole In Soil	14.52
31 23 16 16-0006	VLF	4" Diameter Hole, Auger By Machine Post Hole In Soil	16.34
31 23 16 16-0007	VLF	6" Diameter Hole, Auger By Machine Post Hole In Soil	17.82
31 23 16 16-0008	VLF	8" Diameter Hole, Auger By Machine Post Hole In Soil	19.61
31 23 16 16-0009	VLF	10" Diameter Hole, Auger By Machine Post Hole In Soil	21.79
31 23 16 16-0010	VLF	12" Diameter Hole, Auger By Machine Post Hole In Soil	24.51
31 23 16 16-0011	VLF	18" Diameter Hole, Auger By Machine Post Hole In Soil	28.01
31 23 16 16-0012	VLF	24" Diameter Hole, Auger By Machine Post Hole In Soil	32.68
31 23 16 16-0013	VLF	30" Diameter Hole, Auger By Machine Post Hole In Soil	39.22
31 23 16 16-0014	VLF	36" Diameter Hole, Auger By Machine Post Hole In Soil	49.02

31 23 16 16-0015 Drilling Post Hole In Rock *(31 23 16 16-0001)*

31 23 16 16-0016	CF	Jackhammer Post Hole, Rock	81.05
31 23 16 16-0017	CF	Rock Drill Post Hole, Rock	23.60

31 23 16 16-0018 Post Hole Fill *(31 23 16 16-0001)*

31 23 16 16-0019 Concrete Fill *(31 23 16 16-0018)*

31 23 16 16-0020	VLF	Concrete Fill, Up To 2-1/2" Diameter Hole	6.29
31 23 16 16-0021	VLF	Concrete Fill, 2-1/2" Diameter Hole	8.10
31 23 16 16-0022	VLF	Concrete Fill, 3" Diameter Hole	8.90
31 23 16 16-0023	VLF	Concrete Fill, 4" Diameter Hole	10.21
31 23 16 16-0024	VLF	Concrete Fill, 6" Diameter Hole	14.39
31 23 16 16-0025	VLF	Concrete Fill, 8" Diameter Hole	19.22
31 23 16 16-0026	VLF	Concrete Fill, 10" Diameter Hole	23.50
31 23 16 16-0027	VLF	Concrete Fill, 12" Diameter Hole	27.39
31 23 16 16-0028	VLF	Concrete Fill, 18" Diameter Hole	37.27
31 23 16 16-0029	VLF	Concrete Fill, 24" Diameter Hole	46.20
31 23 16 16-0030	VLF	Concrete Fill, 30" Diameter Hole	54.89
31 23 16 16-0031	VLF	Concrete Fill, 36" Diameter Hole	63.92

31 23 16 16-0032 Grout Fill *(31 23 16 16-0018)*

31 23 16 16-0033	VLF	Grout Fill, Up To 2-1/2" Diameter Hole	7.47
31 23 16 16-0034	VLF	Grout Fill, 2-1/2" Diameter Hole	9.63
31 23 16 16-0035	VLF	Grout Fill, 3" Diameter Hole	10.48
31 23 16 16-0036	VLF	Grout Fill, 4" Diameter Hole	11.76
31 23 16 16-0037	VLF	Grout Fill, 6" Diameter Hole	16.42
31 23 16 16-0038	VLF	Grout Fill, 8" Diameter Hole	21.92
31 23 16 16-0039	VLF	Grout Fill, 10" Diameter Hole	26.70
31 23 16 16-0040	VLF	Grout Fill, 12" Diameter Hole	30.99
31 23 16 16-0041	VLF	Grout Fill, 18" Diameter Hole	41.38
31 23 16 16-0042	VLF	Grout Fill, 24" Diameter Hole	50.52
31 23 16 16-0043	VLF	Grout Fill, 30" Diameter Hole	59.35
31 23 16 16-0044	VLF	Grout Fill, 36" Diameter Hole	68.40

31 23 16 16-0045 Earth Fill, Compacted *(31 23 16 16-0018)*

31 23 16 16-0046	VLF	Earth Fill, Up To 2-1/2" Diameter Hole	5.33
31 23 16 16-0047	VLF	Earth Fill, 2-1/2" Diameter Hole	6.95
31 23 16 16-0048	VLF	Earth Fill, 3" Diameter Hole	7.26
31 23 16 16-0049	VLF	Earth Fill, 4" Diameter Hole	7.47
31 23 16 16-0050	VLF	Earth Fill, 6" Diameter Hole	9.99
31 23 16 16-0051	VLF	Earth Fill, 8" Diameter Hole	13.32
31 23 16 16-0052	VLF	Earth Fill, 10" Diameter Hole	15.98
31 23 16 16-0053	VLF	Earth Fill, 12" Diameter Hole	18.12
31 23 16 16-0054	VLF	Earth Fill, 18" Diameter Hole	22.08
31 23 16 16-0055	VLF	Earth Fill, 24" Diameter Hole	24.78
31 23 16 16-0056	VLF	Earth Fill, 30" Diameter Hole	27.17
31 23 16 16-0057	VLF	Earth Fill, 36" Diameter Hole	29.31

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

31 23 16 26 Rock Removal *(31 23 16)*

31 23 16 26-0001 Rock Breaking By Machine *(31 23 16 26)*

Note: Excludes excavation of broken-up rock.

31 23 16 26-0002	CY	Rock Breaking By Machine, Soft Sedimentary (Shale, Sandstone, Limestone) Rocks	32.25
31 23 16 26-0003	CY	Rock Breaking By Machine, Medium Metamorphic (Slate) Rock	34.39
31 23 16 26-0004	CY	Rock Breaking By Machine, Hard Igneous (Granite, Basalt) Rock	40.84

31 23 16 33 Bulk Excavation *(31 23 16)*

Note: For excavations where the total quantity for a project is greater than 500 cubic yards. See CSI section 31 05 16 00-0000 for imported material, 31 23 16 36-0000 for less than 500 CY excavation.

31 23 16 33-0001 Excavation *(31 23 16 33)*

Note: For bulk excavation. Includes stockpiling excavated materials within 100' of point of excavation.

31 23 16 33-0002	CY	Bulk Excavation by Dozer in Soil	11.96
		For Excavation In Light Material (Class A), Deduct	*-1.50*
		For Excavation In Heavy/Wet Material (Class C), Add	*4.78*
		For >1,000, Deduct	*-1.79*
31 23 16 33-0003	CY	Bulk Excavation by Hydraulic Excavator, Front End Loader, Backhoe in Soil	6.57
		For Excavation In Light Material (Class A), Deduct	*-0.82*
		For Excavation In Heavy/Wet Material (Class C), Add	*2.63*
		For >1,000, Deduct	*-0.99*
31 23 16 33-0004	CY	Bulk Excavation by Dozer in Loose Rock Note: Includes compacted aggregate	14.72
		For >1,000, Deduct	*-2.21*
31 23 16 33-0005	CY	Bulk Excavation by Hydraulic Excavator, Front End Loader, Backhoe in Loose Rock Note: Includes compacted aggregate	8.09
		For >1,000, Deduct	*-1.21*

31 23 16 33-0006 Spreading, Shaping And Rough Grading *(31 23 16 33)*

Note: Imported or stockpiled material for bulk excavation.

31 23 16 33-0007	CY	Spreading, Shaping, and Rough Grading Imported or Stockpiled Material for Bulk Excavation by Machine	7.38
		For >1,000, Deduct	*-1.11*

31 23 16 33-0008 Cutting, Shaping and Rough Grading Of Existing Elevations *(31 23 16 33)*

31 23 16 33-0009	CY	Cutting, Shaping and Rough Grading Existing Elevations For Bulk Excavation by Machine	8.21
		For >1,000, Deduct	*-1.23*

31 23 16 33-0010 Relocating On Site Excavated Material From Excavation *(31 23 16 33)*

Note: For bulk excavation.

31 23 16 33-0011	CY	Relocating On Site Excavated Material From Bulk Excavation >100' to 300'	6.56
		For >1,000, Deduct	*-0.98*
31 23 16 33-0012	CY	Relocating On Site Excavated Material From Bulk Excavation >300' to 500'	9.84
		For >1,000, Deduct	*-1.48*
31 23 16 33-0013	CY	Relocating On Site Excavated Material From Bulk Excavation >500' To 1,000'	14.76
		For >1,000, Deduct	*-2.21*
31 23 16 33-0014	CY	Relocating On Site Excavated Material From Bulk Excavation >1,000'	19.69
		For >1,000, Deduct	*-2.95*

31 23 16 33-0015 Finish Grading For Bulk Excavation *(31 23 16 33)*

31 23 16 33-0016	SY	Finish Grading for Bulk Excavation by Machine	0.82

31 23 16 33-0017 Compaction Of Fill Or Subbase, Per Lift *(31 23 16 33)*

Note: For bulk excavation. See CSI section 31 23 23 23-0001 for compaction water.

31 23 16 33-0018	SY	Compaction of Fill or Subbase for Bulk Excavation by Machine Note: Per Lift	0.83

31 23 16 33-0019 Loading Excess Material For Removal From Excavation *(31 23 16 33)*

Note: For bulk excavation. Includes handwork by laborer for cleanup. Not to be used when excavated material can be loaded directly into truck instead of stockpiling. See CSI section 01 74 19 00-0039 for hauling.

31 23 16 33-0020	CY	Loading Excess Material For Removal From Bulk Excavation	6.76
		For >1,000, Deduct	*-1.01*

31 23 16 36 Excavation for Building Foundations and Other Structures *(31 23 16)*

Note: Use of a Bobcat is limited to access restricted areas and by owner's approval. See CSI section 31 05 16 00-0000 for imported material, 31 23 16 33-0000 for bulk excavation operations over 500 CY.

31 23 16 36-0001 Excavation *(31 23 16 36)*

Note: For building foundations and other structures by machine. Includes stockpiling of excess materials on ground in reach of excavated area.

31 23 16 36-0002 Excavation For Building Foundations And Other Structures By Skid-Steer Loader *(31 23 16 36-0001)*

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
31 23 16 36-0003	CY	Excavation For Building Foundations And Other Structures By Skid-Steer Loader In Soil	10.70	
		For Excavation In Light Material (Class A), Deduct	*-1.34*	
		For Excavation In Heavy/Wet Material (Class C), Add	*4.28*	
		For Up To 20, Add	*10.70*	
		For >20 To 50, Add	*8.03*	
		For >50 To 250, Add	*4.28*	
		For >250 To 500, Add	*1.61*	
31 23 16 36-0004	CY	Excavation For Building Foundations And Other Structures By Skid-Steer Loader In Loose Rock Note: Includes compacted aggregate	13.28	
		For Up To 20, Add	*13.28*	
		For >20 To 50, Add	*9.96*	
		For >50 To 250, Add	*5.31*	
		For >250 To 500, Add	*1.99*	

31 23 16 36-0005 Excavation For Building Foundations And Other Structures By Hydraulic Excavator, Backhoe, Loader *(31 23 16 36-0001)*

31 23 16 36-0006	CY	Excavation For Building Foundations And Other Structures By Hydraulic Excavator, Backhoe, Loader in Soil	7.90	
		For Excavation In Light Material (Class A), Deduct	*-0.99*	
		For Excavation In Heavy/Wet Material (Class C), Add	*3.16*	
		For Up To 20, Add	*7.90*	
		For >20 To 50, Add	*5.93*	
		For >50 To 250, Add	*3.16*	
		For >250 To 500, Add	*1.19*	
31 23 16 36-0007	CY	Excavation For Building Foundations And Other Structures By Hydraulic Excavator, Backhoe, Loader in Loose Rock Note: Includes compacted aggregate	9.40	
		For Up To 20, Add	*9.40*	
		For >20 To 50, Add	*7.05*	
		For >50 To 250, Add	*3.76*	
		For >250 To 500, Add	*1.41*	

31 23 16 36-0008 Excavation For Building Foundations And Other Structures By Hand *(31 23 16 36-0001)*

Note: For areas not accessible by machine and only with owner's approval.

31 23 16 36-0009	CY	Excavation For Building Foundations And Other Structures By Hand in Soil	143.85	
		For Excavation In Light Material (Class A), Deduct	*-17.98*	
		For Excavation In Heavy/Wet Material (Class C), Add	*57.54*	
31 23 16 36-0010	CY	Excavation For Building Foundations And Other Structures By Hand in Loose Rock Note: Includes compacted aggregate	246.74	

31 23 16 36-0011 Relocating On Site Excavated Stockpiled Material From Excavation *(31 23 16 36)*

Note: For building foundations and other structures.

31 23 16 36-0012	CY	Relocating On Site Excavated Stockpiled Material With Dozer From Excavation For Building Foundations and Other Structures >100' to 300'	6.56	
		For Up To 20, Add	*6.56*	
		For >20 To 50, Add	*4.92*	
		For >50 To 250, Add	*2.62*	
		For >250 To 500, Add	*0.98*	
31 23 16 36-0013	CY	Relocating On Site Excavated Stockpiled Material With Dozer From Excavation For Building Foundations and Other Structures >300' to 500'	9.84	
		For Up To 20, Add	*9.84*	
		For >20 To 50, Add	*7.38*	
		For >50 To 250, Add	*3.94*	
		For >250 To 500, Add	*1.48*	
31 23 16 36-0014	CY	Relocating On Site Excavated Stockpiled Material With Dozer From Excavation For Building Foundations and Other Structures >500' to 1,000'	14.76	
		For Up To 20, Add	*14.76*	
		For >20 To 50, Add	*11.07*	
		For >50 To 250, Add	*5.90*	
		For >250 To 500, Add	*2.21*	
31 23 16 36-0015	CY	Relocating On Site Excavated Stockpiled Material With Dozer From Excavation For Building Foundations and Other Structures >1,000'	19.69	
		For Up To 20, Add	*19.69*	
		For >20 To 50, Add	*14.77*	
		For >50 To 250, Add	*7.88*	
		For >250 To 500, Add	*2.95*	

31 23 16 36-0016 Backfilling *(31 23 16 36)*

Note: For building foundations and other structures with imported or stockpiled materials. Includes rough grading each backfill lift.

31 23 16 36-0017	CY	Backfilling Around Building Foundations And Other Structures By Skid-Steer Loader	5.27	
		For Up To 20, Add	*5.27*	
		For >20 To 50, Add	*3.95*	
		For >50 To 250, Add	*2.11*	
		For >250 To 500, Add	*0.79*	
31 23 16 36-0018	CY	Backfilling Around Building Foundations And Other Structures By Hydraulic Excavator, Backhoe, Loader	6.12	
		For Up To 20, Add	*6.12*	
		For >20 To 50, Add	*4.59*	
		For >50 To 250, Add	*2.45*	
		For >250 To 500, Add	*0.92*	
31 23 16 36-0019	CY	Backfilling Around Building Foundations And Other Structures By Hand	68.50	

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

31 23 16 36-0020 Compaction Of Fill Or Subbase *(31 23 16 36)*

Note: For building foundations and other structures. See CSI section 31 23 23 23-0001 for compaction water.

31 23 16 36-0021	CY	Compaction Of Fill Or Subbase For Building Foundations and Other Structures by Vibratory Plate, Air Tamper, etc.	13.22
		For Up To 20, Add	*13.22*
		For >20 To 50, Add	*9.92*
		For >50 To 250, Add	*5.29*
		For >250 To 500, Add	*1.98*
31 23 16 36-0022	CY	Compaction Of Fill Or Subbase For Building Foundations and Other Structures by Hand	45.07

31 23 16 36-0023 Grading For Building Foundations And Other Structures *(31 23 16 36)*

31 23 16 36-0024	SY	Rough Grading For Building Foundations And Other Structures by Machine	1.42
31 23 16 36-0025	SY	Finish Grading For Building Foundations And Other Structures by Machine	2.28
31 23 16 36-0026	SY	Finish Grading For Building Foundations And Other Structures by Hand	13.32

31 23 16 36-0027 Loading Excess Material For Removal From Excavation *(31 23 16 36)*

Note: For building foundations and other structures. Includes handwork by laborer for cleanup. Not to be used when excavated material can be loaded directly into truck instead of stockpiling. See CSI section 01 74 19 00-0039 for hauling.

31 23 16 36-0028	CY	Load Excess Material For Removal From Excavation For Building Foundations and Other Structures by Machine	7.03
		For Up To 20, Add	*7.03*
		For >20 To 50, Add	*5.27*
		For >50 To 250, Add	*2.81*
		For >250 To 500, Add	*1.05*
31 23 16 36-0029	CY	Load Excess Material For Removal From Excavation For Building Foundations and Other Structures by Hand	105.48

31 23 16 36-0030 Spread Excess Or Imported Material And Grade On Site *(31 23 16 36)*

Note: For building foundations and other structures.

31 23 16 36-0031	CY	Spread Excess Or Imported Material And Rough Grade On Site By Machine	3.82
		For Up To 20, Add	*3.82*
		For >20 To 50, Add	*2.87*
		For >50 To 250, Add	*1.53*
		For >250 To 500, Add	*0.57*
31 23 16 36-0032	CY	Spread Excess Or Imported Material And Rough Grade On Site By Hand	58.20

31 23 16 46 Excavation Operations to Expose Underground Pipes and Structures *(31 23 16)*

Note: Includes work above, beside and under pipe. Pipes up to 82" in diameter. Use this section for trenching operations even if the total project volume exceeds 500 CY. Use tasks for work by hand only for areas not accessible by machine. See CSI section 31 23 16 13-0017 for loading excess material, 31 23 16 13-0020 for spreading excess material.

31 23 16 46-0001 Excavation To Expose Underground Pipe Or Structures *(31 23 16 46)*

Note: Includes stockpiling excess materials and trimming sides and bottom of trench. Excludes rock breaking.

31 23 16 46-0002 Excavation By Machine To Expose Underground Pipe Or Structure *(31 23 16 46-0001)*

31 23 16 46-0003	CY	Excavation By Hydraulic Excavator, Backhoe, Loader in Soil/Common Excavation To Expose Underground Pipes And Structures	15.79
		For Excavation In Light Material (Class A), Deduct	*-1.97*
		For Excavation In Heavy/Wet Material (Class C), Add	*6.32*
		For Up To 20, Add	*15.79*
		For >20 To 50, Add	*11.84*
		For >50 To 250, Add	*6.32*
		For >250 To 500, Add	*2.37*
31 23 16 46-0004	CY	Excavation By Hydraulic Excavator, Backhoe, Loader in Loose Rock To Expose Underground Pipes And Structures	18.74
		For Up To 20, Add	*18.74*
		For >20 To 50, Add	*14.06*
		For >50 To 250, Add	*7.50*
		For >250 To 500, Add	*2.81*

31 23 16 46-0005 Excavation By Hand To Expose Underground Pipe Or Structure *(31 23 16 46-0001)*

31 23 16 46-0006	CY	Excavation By Hand In Soil To Expose Underground Pipes And Structures Note: Includes stockpiling excess materials and trimming sides and bottom of trench.	179.80
31 23 16 46-0007	CY	Excavation By Hand In Loose Rock To Expose Underground Pipes And Structures Note: Includes stockpiling excess materials and trimming sides and bottom of trench.	268.51

31 23 16 46-0008 Backfilling Or Placing Subbase At Exposed Underground Pipe Or Structures *(31 23 16 46)*

Note: With imported or stockpiled materials

31 23 16 46-0009	CY	Backfilling By Hydraulic Excavator, Backhoe, Loader At Exposed Underground Pipes And Structures	11.84
		For >20 To 50, Add	*8.88*
		For >50 To 250, Add	*4.74*
		For >250 To 500, Add	*1.78*
31 23 16 46-0010	CY	Backfilling by Hand At Exposed Underground Pipes And Structures	81.51

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
31 23 16 46-0011		**Compaction Of Fill Or Subbase At Exposed Underground Pipe Or Structures** *(31 23 16 46)* Note: With imported or stockpiled materials		
31 23 16 46-0012	CY	Compaction of Fill or Subbase by Mechanical Means At Exposed Underground Pipe Or Structures	16.67	
		For Up To 20, Add	*16.67*	
		For >20 To 50, Add	*12.50*	
		For >50 To 250, Add	*6.67*	
		For >250 To 500, Add	*2.50*	
31 23 16 46-0013	CY	Compaction of Fill or Subbase by Hand At Exposed Underground Pipe Or Structures	54.09	
31 23 16 46-0014		**Loading Excess Material For Removal From Excavation At Exposed Underground Pipe Or Structures** *(31 23 16 46)* Note: Includes hand work by laborer for cleanup. Not to be used when excavated material can be loaded directly into truck instead of stockpiling. See CSI section 01 74 19 00-0039 for hauling.		
31 23 16 46-0015	CY	Load Excess Material by Machine for Removal from Excavation At Exposed Underground Pipe Or Structures	8.02	
		For Up To 20, Add	*8.02*	
		For >20 To 50, Add	*6.02*	
		For >50 To 250, Add	*3.21*	
		For >250 To 500, Add	*1.20*	
		For >1,000, Deduct	*-1.20*	
31 23 16 46-0016	CY	Load Excess Material by Hand for Removal from Excavation At Exposed Underground Pipe Or Structures	105.48	
31 23 16 46-0017		**Spread Excess Or Imported Material And Grade At Exposed Underground Pipe Or Structures** *(31 23 16 46)* Note: Includes hand work by laborer for cleanup.		
31 23 16 46-0018	CY	Spread Excess Or Imported Material And Grade On Site By Machine At Exposed Underground Pipe Or Structures	3.82	
		For Up To 20, Add	*3.82*	
		For >20 To 50, Add	*2.87*	
		For >50 To 250, Add	*1.53*	
		For >250 To 500, Add	*0.57*	
		For >1,000, Deduct	*-0.57*	
31 23 16 46-0019	CY	Spread Excess Or Imported Material And Grade On Site By Hand At Exposed Underground Pipe Or Structures	58.20	
31 23 19		**Dewatering** *(31 23)*		
31 23 19 00-0001		**Well Point Dewatering System** *(31 23 19)*		
31 23 19 00-0002		**Delivery, Installation And Removal Cost** *(31 23 19 00-0001)* Note: Priced by linear foot of header used.		
31 23 19 00-0003	LF	Up To 100' In Length Well Point System Delivery, Installation And Removal	148.40	
31 23 19 00-0004	LF	>100' To 250' In Length Well Point System Delivery, Installation And Removal	81.62	
31 23 19 00-0005	LF	>250' To 500' In Length Well Point System Delivery, Installation And Removal	74.20	
31 23 19 00-0006	LF	>250' To 500' In Length Well Point System Delivery, Installation And Removal	66.78	
31 23 19 00-0007	LF	>500' To 1,000' In Length Well Point System Delivery, Installation And Removal	59.36	
31 23 19 00-0008	LF	>1,000' In Length Well Point System Delivery, Installation And Removal	51.94	
31 23 19 00-0009		**Well Point Dewatering System Rental** *(31 23 19 00-0001)* Note: Includes all necessary equipment for a well point system (well point with risers, pump, valves, header pipe, discharge pipe, etc.). Use normal adjustment factor only for rental tasks and modifiers. Unit of measure and modifier quantities are based on linear feet of header per day (ex. 200' of header for four days - quantity should be 200'x4 or 800'). Rental days include weekends, when appropriate, regardless if the system is operational during that time. Use weekly modifier for system use of five days to less than a month. Use monthly modifier for system use of one month or greater. See CSI section 31 23 19 00-0002 for installation, 31 23 19 00-0015 for operational costs.		
31 23 19 00-0010	LFD	Up To 100' In Length Well Point System Rental (LF x Days = Quantity)	2.35	
		For >5 Days And <1 Month, Deduct	*-0.52*	
		For >1 Month, Deduct	*-0.66*	
31 23 19 00-0011	LFD	>100' To 250' In Length Well Point System Rental (LF x Days = Quantity)	1.37	
		For >5 Days And <1 Month, Deduct	*-0.30*	
		For >1 Month, Deduct	*-0.38*	
31 23 19 00-0012	LFD	>250' To 500' In Length Well Point System Rental (LF x Days = Quantity)	0.98	
		For >5 Days And <1 Month, Deduct	*-0.22*	
		For >1 Month, Deduct	*-0.27*	
31 23 19 00-0013	LFD	>500' To 1,000' In Length Well Point System Rental (LF x Days = Quantity)	0.72	
		For >5 Days And <1 Month, Deduct	*-0.16*	
		For >1 Month, Deduct	*-0.20*	
31 23 19 00-0014	LFD	>1,000' In Length Well Point System Rental (LF x Days = Quantity)	0.65	
		For >5 Days And <1 Month, Deduct	*-0.14*	
		For >1 Month, Deduct	*-0.18*	
31 23 19 00-0015		**Well Point Dewatering System Operation Costs** *(31 23 19 00-0001)* Note: The quantity for operation shall be the total number of hours the well point system is operational.		
31 23 19 00-0016	HR	Operation Costs	131.47	
31 23 23		**Fill** *(31 23)*		

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

31 23 23 23 Compaction *(31 23 23)*

31 23 23 23-0001 Compaction Water, Water Truck And Operator *(31 23 23 23)*

31 23 23 23-0002	MGL	Compaction Water, Water Truck And Operator Note: Use this task in situations where earth fill, base material, etc. requires additional moisture to comply with the compaction specification. Includes delivery up to 15 miles. (Per each 1,000 gallons of water)	311.45

31 25 Erosion and Sedimentation Controls *(31 20)*

31 25 14 Stabilization Measures for Erosion and Sedimentation Control *(31 25)*

31 25 14 13 Hydraulically-Applied Erosion Control *(31 25 14)*

31 25 14 13-0001 Bonded Fiber Matrix *(31 25 14 13)*

31 25 14 13-0002	MSF	Up To 25,000 SF Bonded Fiber Matrix, Hydraulically Applied	67.49
31 25 14 13-0003	MSF	>25,000 To 50,000 SF Bonded Fiber Matrix, Hydraulically Applied	61.89
31 25 14 13-0004	MSF	>50,000 To 100,000 SF Bonded Fiber Matrix, Hydraulically Applied	57.15
31 25 14 13-0005	MSF	>100,000 Bonded Fiber Matrix, Hydraulically Applied	54.45

31 25 14 16 Rolled Erosion Control Mats and Blankets *(31 25 14)*

Note: Includes all staples and stakes for erosion control blankets and turf reinforcement mats.

31 25 14 16-0001 Erosion Control Blankets And Turf Reinforcement Mats *(31 25 14 16)*

31 25 14 16-0002 Erosion Control Blankets, Short Term, Light Duty *(31 25 14 16-0001)*

31 25 14 16-0003	SY	S75 Single Net Erosion Control Blanket Note: Straw matrix with degradable thread to a single standard photodegradable polypropylene netting as manufactured by North American Green.	3.63
31 25 14 16-0004	SY	S75BN Single Net Erosion Control Blanket Note: Straw Matrix with Biodegradable Thread to a Single Natural Fiber Netting as manufactured by North American Green.	4.72
31 25 14 16-0005	SY	Curlex 1, Single Net Erosion Control Blanket Note: As manufactured by American Excelsior	3.43
31 25 14 16-0006	SY	Curlex 1, Single Net Erosion Control Blanket Note: As manufactured by American Green.	3.63
31 25 14 16-0007	SY	Futerra Erosion Control Blanket, Wood Fibers With Biodegradable Netting	3.20

31 25 14 16-0008 Erosion Control Blankets, Intermediate Duration *(31 25 14 16-0001)*

31 25 14 16-0009	SY	S150 Double Net Erosion Control Blanket Note: Straw matrix with degradable thread to a double standard photodegradable polypropylene netting as manufactured by North American Green.	4.69
31 25 14 16-0010	SY	S150 BN Double Net Erosion Control Blanket Note: Straw matrix with biodegradable thread to a double natural fiber netting as manufactured by North American Green.	6.41
31 25 14 16-0011	SY	Curlex II, Double Net Erosion Control Blanket, Natural Note: As manufactured by American Excelsior.	3.88
31 25 14 16-0012	SY	Curlex II, Double Net Erosion Control Blanket, Green Note: As manufactured by American Excelsior.	4.07
31 25 14 16-0013	SY	Enforcer Double Net Erosion Control Blanket Note: As manufactured by American Excelsior.	4.35

31 25 14 16-0014 Turf Reinforcement Mats (TRM) *(31 25 14 16-0001)*

Note: Permanent, UV stabilized.

31 25 14 16-0015	SY	P300 Permanent Polypropylene Turf Reinforcement Mat Note: 100% synthetic, UV stabilized, two layer netting.	15.44
31 25 14 16-0016	SY	C350 Permanent Turf Reinforcement Mat Note: 100% synthetic, UV stabilized netting incorporating natural coconut fibers as manufactured by North American Green.	14.20
31 25 14 16-0017	SY	Recyclex TRM, Permanent Turf Reinforcement Mat Note: As manufactured by American Excelsior, 100% recycled	19.54

31 25 14 16-0018 Jute Mesh Erosion Control Blankets *(31 25 14 16-0001)*

31 25 14 16-0019	SY	Jute Mesh, Open Uniform Weave	4.88

31 25 14 16-0020 Revegetation Mat *(31 25 14 16-0001)*

31 25 14 16-0021	SY	3-Dimensional Webbed Revegetation Mat, Polyolefin Fiber Note: Polyolefin fibers oriented and mechanically bonded between two nets. Landlok TRM 450 or equal.	12.03
31 25 14 16-0022	SY	Webbed Revegetation Mat, Polypropylene Fiber Note: Polypropylene fibers positioned between two high strength biaxial oriented nets and mechanically held together by parallel stitching with polypropylene thread. Landlok TRM 1060 or equal.	17.23

31 25 14 23 Stabilization Measures for Erosion Control *(31 25 14)*

See CSI section 01 74 19 00-0039 for hauling greater than 15 miles.

31 25 14 23-0001 Sand Bags *(31 25 14 23)*

Note: Bags filled on site with delivered material. Includes material and placement of bags.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
31 25 14 23-0002	BAG	50 Lb. Capacity Sand Bag With Sand	7.21	3.03
		For >2,500 To 5,000, Deduct	*-0.61*	
		For >5,000, Deduct	*-1.33*	
31 25 14 23-0003	BAG	75 Lb. Capacity Sand Bag With Sand	9.30	3.77
		For >2,500 To 5,000, Deduct	*-0.75*	
		For >5,000, Deduct	*-1.68*	
31 25 14 23-0004	BAG	100 Lb. Capacity Sand Bag With Sand	11.74	4.50
		For >2,500 To 5,000, Deduct	*-0.90*	
		For >5,000, Deduct	*-2.08*	
31 25 14 23-0005	BAG	125 Lb. Capacity Sand Bag With Sand	14.44	5.63
		For >2,500 To 5,000, Deduct	*-1.13*	
		For >5,000, Deduct	*-2.57*	
31 25 14 23-0006	BAG	150 Lb. Capacity Sand Bag With Sand	17.58	6.75
		For >2,500 To 5,000, Deduct	*-1.35*	
		For >5,000, Deduct	*-3.11*	
31 25 14 23-0007	BAG	175 Lb. Capacity Sand Bag With Sand	20.50	7.68
		For >2,500 To 5,000, Deduct	*-1.53*	
		For >5,000, Deduct	*-3.58*	
31 25 14 23-0008	BAG	2,000 Lb. Capacity Sand Bag With Sand	167.83	54.21
		For >2,500 To 5,000, Deduct	*-10.18*	
		For >5,000, Deduct	*-26.96*	
31 25 14 23-0009	BAG	3,000 Lb. Capacity Sand Bag With Sand	216.23	59.63
		For >2,500 To 5,000, Deduct	*-11.19*	
		For >5,000, Deduct	*-32.82*	

31 25 14 23-0010 Gravel Bags *(31 25 14 23)*

Note: Bags filled on site with delivered material. Includes material and placement of bags.

31 25 14 23-0011	BAG	30 Lb. Capacity Gravel Bag With Gravel	6.67	2.02
		For >2,500 To 5,000, Deduct	*-0.40*	
		For >5,000, Deduct	*-1.07*	
31 25 14 23-0012	BAG	50 Lb. Capacity Gravel Bag With Gravel	12.04	3.03
		For >2,500 To 5,000, Deduct	*-0.61*	
		For >5,000, Deduct	*-1.81*	

31 25 14 23-0013 Floating Turbidity Curtain *(31 25 14 23)*

Note: Type 2 DOT fabric - 18 oz. nominal laminated vinyl/polyester. EPS flotation, 6" x 6", 13.5 lb./ft. buoyancy in fresh water and 14.4 lb./ft. buoyancy in saltwater.

31 25 14 23-0014	LF	3' High, 18 Oz PVC Coated Polyester, Type 2 DOT Turbidity Curtain	29.53	
		For Type 1, Deduct	*-4.55*	
		For 13 Oz PVC Fabric, Type 2, Deduct	*-2.77*	
		For 22 Oz PVC Fabric, Type 2 Heavy-Duty, Add	*3.36*	
31 25 14 23-0015	LF	4' High, 18 Oz PVC Coated Polyester, Type 2 DOT Turbidity Curtain	32.00	
		For Type 1, Deduct	*-5.00*	
		For 13 Oz PVC Fabric, Type 2, Deduct	*-3.05*	
		For 22 Oz PVC Fabric, Type 2 Heavy-Duty, Add	*3.70*	
31 25 14 23-0016	LF	5' High, 18 Oz PVC Coated Polyester, Type 2 DOT Turbidity Curtain	35.42	
		For Type 1, Deduct	*-5.67*	
		For 13 Oz PVC Fabric, Type 2, Deduct	*-3.45*	
		For 22 Oz PVC Fabric, Type 2 Heavy-Duty, Add	*4.19*	
31 25 14 23-0017	LF	6' High, 18 Oz PVC Coated Polyester, Type 2 DOT Turbidity Curtain	38.32	
		For Type 1, Deduct	*-6.21*	
		For 13 Oz PVC Fabric, Type 2, Deduct	*-3.78*	
		For 22 Oz PVC Fabric, Type 2 Heavy-Duty, Add	*4.59*	
31 25 14 23-0018	LF	7' High, 18 Oz PVC Coated Polyester, Type 2 DOT Turbidity Curtain	40.21	
		For Type 1, Deduct	*-6.52*	
		For 13 Oz PVC Fabric, Type 2, Deduct	*-3.97*	
		For 22 Oz PVC Fabric, Type 2 Heavy-Duty, Add	*4.82*	
31 25 14 23-0019	LF	8' High, 18 Oz PVC Coated Polyester, Type 2 DOT Turbidity Curtain	42.12	
		For Type 1, Deduct	*-6.82*	
		For 13 Oz PVC Fabric, Type 2, Deduct	*-4.15*	
		For 22 Oz PVC Fabric, Type 2 Heavy-Duty, Add	*5.04*	
31 25 14 23-0020	LF	9' High, 18 Oz PVC Coated Polyester, Type 2 DOT Turbidity Curtain	44.32	
		For Type 1, Deduct	*-7.19*	
		For 13 Oz PVC Fabric, Type 2, Deduct	*-4.37*	
		For 22 Oz PVC Fabric, Type 2 Heavy-Duty, Add	*5.31*	
31 25 14 23-0021	LF	10' High, 18 Oz PVC Coated Polyester, Type 2 DOT Turbidity Curtain	47.34	
		For Type 1, Deduct	*-7.73*	
		For 13 Oz PVC Fabric, Type 2, Deduct	*-4.71*	
		For 22 Oz PVC Fabric, Type 2 Heavy-Duty, Add	*5.71*	
31 25 14 23-0022	LF	12' High, 18 Oz PVC Coated Polyester, Type 2 DOT Turbidity Curtain	49.75	
		For Type 1, Deduct	*-8.13*	
		For 13 Oz PVC Fabric, Type 2, Deduct	*-4.95*	
		For 22 Oz PVC Fabric, Type 2 Heavy-Duty, Add	*6.01*	
31 25 14 23-0023	LF	13' High, 18 Oz PVC Coated Polyester, Type 2 DOT Turbidity Curtain	52.97	
		For Type 1, Deduct	*-8.70*	
		For 13 Oz PVC Fabric, Type 2, Deduct	*-5.30*	
		For 22 Oz PVC Fabric, Type 2 Heavy-Duty, Add	*6.43*	
31 25 14 23-0024	LF	14' High, 18 Oz PVC Coated Polyester, Type 2 DOT Turbidity Curtain	55.97	
		For Type 1, Deduct	*-9.22*	
		For 13 Oz PVC Fabric, Type 2, Deduct	*-5.61*	
		For 22 Oz PVC Fabric, Type 2 Heavy-Duty, Add	*6.81*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
31 25 14 23-0025	LF	15' High, 18 Oz PVC Coated Polyester, Type 2 DOT Turbidity Curtain	58.88	
		For Type 1, Deduct	*-9.70*	
		For 13 Oz PVC Fabric, Type 2, Deduct	*-5.91*	
		For 22 Oz PVC Fabric, Type 2 Heavy-Duty, Add	*7.17*	
31 25 14 23-0026	LF	16' High, 18 Oz PVC Coated Polyester, Type 2 DOT Turbidity Curtain	64.06	
		For Type 1, Deduct	*-10.70*	
		For 13 Oz PVC Fabric, Type 2, Deduct	*-6.51*	
		For 22 Oz PVC Fabric, Type 2 Heavy-Duty, Add	*7.91*	
31 25 14 23-0027	LF	17' High, 18 Oz PVC Coated Polyester, Type 2 DOT Turbidity Curtain	67.17	
		For Type 1, Deduct	*-11.22*	
		For 13 Oz PVC Fabric, Type 2, Deduct	*-6.83*	
		For 22 Oz PVC Fabric, Type 2 Heavy-Duty, Add	*8.29*	
31 25 14 23-0028	LF	18' High, 18 Oz PVC Coated Polyester, Type 2 DOT Turbidity Curtain	70.21	
		For Type 1, Deduct	*-11.70*	
		For 13 Oz PVC Fabric, Type 2, Deduct	*-7.12*	
		For 22 Oz PVC Fabric, Type 2 Heavy-Duty, Add	*8.65*	
31 25 14 23-0029	LF	19' High, 18 Oz PVC Coated Polyester, Type 2 DOT Turbidity Curtain	73.41	
		For Type 1, Deduct	*-12.22*	
		For 13 Oz PVC Fabric, Type 2, Deduct	*-7.44*	
		For 22 Oz PVC Fabric, Type 2 Heavy-Duty, Add	*9.03*	
31 25 14 23-0030	LF	20' High, 18 Oz PVC Coated Polyester, Type 2 DOT Turbidity Curtain	76.53	
		For Type 1, Deduct	*-12.70*	
		For 13 Oz PVC Fabric, Type 2, Deduct	*-7.73*	
		For 22 Oz PVC Fabric, Type 2 Heavy-Duty, Add	*9.39*	

31 25 14 23-0031 Turbidity Curtain Anchors *(31 25 14 23)*

31 25 14 23-0032	EA	14 Lb., Turbidity Curtain Anchor System Note: Includes anchor, anchor chain, and marker buoy and rope.	790.04
31 25 14 23-0033	EA	25 Lb., Turbidity Curtain Anchor System Note: Includes anchor, anchor chain, and marker buoy and rope.	1,082.65
31 25 14 23-0034	EA	40 Lb., Turbidity Curtain Anchor System Note: Includes anchor, anchor chain, and marker buoy and rope.	1,376.51
31 25 14 23-0035	EA	65 Lb., Turbidity Curtain Anchor System Note: Includes anchor, anchor chain, and marker buoy and rope.	1,799.75

31 25 14 23-0036 Filter Bags *(31 25 14 23)*

31 25 14 23-0037 Non-Woven Filter Bags *(31 25 14 23-0036)*

31 25 14 23-0038	EA	6' x 15' Non-Woven Filter Bag	264.29
31 25 14 23-0039	EA	13' x 15' Non-Woven Filter Bag	382.41
31 25 14 23-0040	EA	15' x 15' Non-Woven Filter Bag	439.68

31 25 14 23-0041 Monofilament Filter Bags *(31 25 14 23-0036)*

31 25 14 23-0042	EA	5' x 15' Monofilament Filter Bag	274.78
31 25 14 23-0043	EA	10' x 15' Monofilament Filter Bag	380.42

31 25 14 23-0044 Cable Articulating Concrete Block *(31 25 14 23)*

Note: 4000 PSI Compressive strength, 12 Lbs./CF maximum absorption. Interlocking block with longitudinal revetment cable. Includes anchoring block to 12" x 12" x 6" concrete pier every 5' with anchor and filling cells with stockpiled material. Excludes site preparation and imported materials.

31 25 14 23-0045	SF	4.75" Open Cell Articulated Concrete Block With Earth Backfill	42.38
		For Up To 500, Add	*9.70*
		For >500 To 1,000, Add	*5.47*
31 25 14 23-0046	SF	6" Open Cell Articulated Concrete Block With Earth Backfill	48.16
		For Up To 500, Add	*10.97*
		For >500 To 1,000, Add	*6.16*
31 25 14 23-0047	SF	7.5" Open Cell Articulated Concrete Block With Earth Backfill	54.83
		For Up To 500, Add	*12.44*
		For >500 To 1,000, Add	*6.96*
31 25 14 23-0048	SF	9" Open Cell Articulated Concrete Block With Earth Backfill	61.70
		For Up To 500, Add	*13.98*
		For >500 To 1,000, Add	*7.81*
31 25 14 23-0049	SF	4.75" Closed Cell Articulated Concrete Block	45.06
		For Up To 500, Add	*10.24*
		For >500 To 1,000, Add	*5.73*
31 25 14 23-0050	SF	6" Closed Cell Articulated Concrete Block	51.37
		For Up To 500, Add	*11.61*
		For >500 To 1,000, Add	*6.48*
31 25 14 23-0051	SF	7.5" Closed Cell Articulated Concrete Block	58.63
		For Up To 500, Add	*13.20*
		For >500 To 1,000, Add	*7.34*
31 25 14 23-0052	SF	9" Closed Cell Articulated Concrete Block	66.04
		For Up To 500, Add	*14.85*
		For >500 To 1,000, Add	*8.24*

31 25 14 26 Stabilization Measures for Sedimentation Control *(31 25 14)*

31 25 14 26-0001 Silt Fences And Dike Barriers *(31 25 14 26)*

Note: Includes stakes and embedding.

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
31 25 14 26-0002		**Silt Fences 2' High** *(31 25 14 26-0001)*		
		See CSI section 31 25 14 26-0016 for removal of silt fence.		
31 25 14 26-0003	LF	2' High Silt Fence with Stakes at 4' On Center	5.24	
31 25 14 26-0004	LF	2' High Silt Fence with Stakes at 6' On Center	4.04	
31 25 14 26-0005	LF	2' High Silt Fence with Stakes at 8' On Center	2.83	
31 25 14 26-0006	LF	2' High Silt Fence with Stakes at 10' On Center	2.40	
31 25 14 26-0007		**Silt Fences 3' High** *(31 25 14 26-0001)*		
		See CSI section 31 25 14 26-0016 for removal of silt fence.		
31 25 14 26-0008	LF	3' High Silt Fence with Stakes at 4' On Center	6.20	
		For Wire Backed Fence, Add	*0.55*	
31 25 14 26-0009	LF	3' High Silt Fence with Stakes at 6' On Center	4.80	
		For Wire Backed Fence, Add	*0.55*	
31 25 14 26-0010	LF	3' High Silt Fence with Stakes at 8' On Center	3.34	
		For Wire Backed Fence, Add	*0.55*	
31 25 14 26-0011	LF	3' High Silt Fence with Stakes at 10' On Center	2.72	
		For Wire Backed Fence, Add	*0.55*	
31 25 14 26-0012		**Silt Dike Barrier** *(31 25 14 26-0001)*		
31 25 14 26-0013	LF	Silt Dike Barrier With Stakes	4.08	
31 25 14 26-0014		**Super Silt Fences, 41" Total Height, 8" Below Ground** *(31 25 14 26-0001)*		
31 25 14 26-0015	LF	41" Total Height Super Silt Fence, 8" Below Ground, Galvanized Chain Link, With 2-1/2" Posts, 10' On Center With Geotextile Fabric Attached	13.19	
31 25 14 26-0016		**Silt Fences Removal** *(31 25 14 26-0001)*		
31 25 14 26-0017	LF	Removal Of Silt Fence And Stakes	0.96	
31 25 14 26-0018		**Hay And Straw Bales** *(31 25 14 26)*		
		Note: Includes trench for placement, and stakes.		
31 25 14 26-0019	LF	Place Sterilized Straw Bales	5.40	
		Note: Includes securing in ground with stakes. See CSI section 31 25 14 26-0021 for removal of straw bale.		
31 25 14 26-0020	LF	Place Hay Bales	5.00	
		Note: Includes securing in ground with stakes. See CSI section 31 25 14 26-0021 for removal of hay bale.		
31 25 14 26-0021	LF	Removal Of Hay Or Straw Bales	1.72	
		Note: Includes removal of stakes.		
31 25 14 26-0022		**Sediment Logs (Degradable)** *(31 25 14 26)*		
31 25 14 26-0023		**Sediment Logs (Degradable)** *(31 25 14 26-0022)*		
		Note: Includes stakes and removal after use. Curlex sediment logs as manufactured by American Excelsior.		
31 25 14 26-0024	LF	9" Sediment Fiber Roll Log	6.04	
31 25 14 26-0025	LF	12" Sediment Fiber Roll Log	6.94	
31 25 14 26-0026	LF	20" Sediment Fiber Roll Log	10.36	
31 25 14 26-0027		**Wattles (Degradable) With UV Stabilized Synthetic Netting** *(31 25 14 26-0022)*		
		Note: Includes trench for placement, 24" wood staking at 4' on-center		
31 25 14 26-0028	EA	Wattles (Sterile Straw Filled Rolls), 8" x 25'	121.41	
31 25 14 26-0029	EA	Wattles (Sterile Straw Filled Rolls), 9" x 25'	126.13	
31 25 14 26-0030	EA	Wattles (Sterile Straw Filled Rolls), 12" x 20'	130.27	
31 25 14 26-0031	EA	Wattles (Sterile Straw Filled Rolls), 20" x 10'	130.74	
31 25 14 26-0032		**Fiber Roll (CALTRANS Type 1)** *(31 25 14 26)*		
		Note: Includes furrow trench for placement, 24" wood staking at 4' on-center		
31 25 14 26-0033	LF	8" Diameter Fiber Roll, (Sterile Straw Filled Rolls, With Natural Fiber Wrapping), CALTRANS Type 1	6.63	
		For >1,000 To 10,000, Deduct	*-0.83*	
		For >10,000, Deduct	*-1.40*	
31 25 14 26-0034	LF	9" Diameter Fiber Roll, (Sterile Straw Filled Rolls, With Natural Fiber Wrapping), CALTRANS Type 1	6.87	
		For >1,000 To 10,000, Deduct	*-0.84*	
		For >10,000, Deduct	*-1.42*	
31 25 14 26-0035	LF	12" Diameter Fiber Roll, (Sterile Straw Filled Rolls, With Natural Fiber Wrapping), CALTRANS Type 1	8.77	
		For >1,000 To 10,000, Deduct	*-1.01*	
		For >10,000, Deduct	*-1.70*	
31 25 14 26-0036		**Fiber Roll (CALTRANS Type 2)** *(31 25 14 26)*		
		Note: Includes 24" wood stakes at 2' on-center off-set on sides with ropes.		
31 25 14 26-0037	LF	8" Diameter Fiber Roll, (Sterile Straw Filled Rolls, With Natural Fiber Wrapping), CALTRANS Type 2	5.18	
		For >1,000 To 10,000, Deduct	*-0.61*	
		For >10,000, Deduct	*-1.03*	
31 25 14 26-0038	LF	9" Diameter Fiber Roll, (Sterile Straw Filled Rolls, With Natural Fiber Wrapping), CALTRANS Type 2	5.61	
		For >1,000 To 10,000, Deduct	*-0.65*	
		For >10,000, Deduct	*-1.10*	

copyright 2026 The Gordian Group, Inc.

MINOR CSI	UOM	DESCRIPTION	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST
31 25 14 26-0039	LF	12" Diameter Fiber Roll, (Sterile Straw Filled Rolls, With Natural Fiber Wrapping), CALTRANS Type 2	6.84	
		For >1,000 To 10,000, Deduct	*-0.72*	
		For >10,000, Deduct	*-1.21*	

31 25 14 26-0040 Inlet Protection Sediment Bags *(31 25 14 26)*

Note: Includes removal, cleaning, and replacement per each location.

31 25 14 26-0041	EA	2' x 2' x 3' Inlet Protection Sediment Bag	67.13	
31 25 14 26-0042	EA	2' x 3' x 3' Inlet Protection Sediment Bag	77.87	
31 25 14 26-0043	EA	2' x 4' x 3' Inlet Protection Sediment Bag	85.43	

31 25 14 26-0044 Flexible Foam Core Sediment Barrier, Triangular Silt Dike *(31 25 14 26)*

Note: Includes aprons on either side, stakes and removal after use.

31 25 14 26-0045	EA	10" x 7', Flexible Sediment Foam Barrier, Triangular Silt Dike	151.29	

31 25 14 26-0046 Clean Sediment Logs/Wattles *(31 25 14 26)*

Note: Includes removal, cleaning, and replacement per each location.

31 25 14 26-0047	EA	Clean Sediment Logs/Wattles	95.91	

END OF SECTION 31

copyright 2026 The Gordian Group, Inc.

CSI	UOM	DESCRIPTION	MINOR	TOTAL DIRECT UNIT COST	DEMOLITION UNIT COST

THIS PAGE INTENTIONALLY LEFT BLANK

copyright 2026 The Gordian Group, Inc.

This Page Intentionally Left Blank

GORDIAN®

gordian.com | 855.467.9444
30 Patewood Drive
Building 2, Suite 350
Greenville, South Carolina 29615